

CDMA-BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 825$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 53.823$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32_Ch 1013 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.992 mW/g

Rear/1xRTT_RC3 SO32_Ch 1013 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube


0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.557 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.9150

SAR(1 g) = 0.975 mW/g; SAR(10 g) = 0.510 mW/g

Maximum value of SAR (measured) = 1.323 mW/g

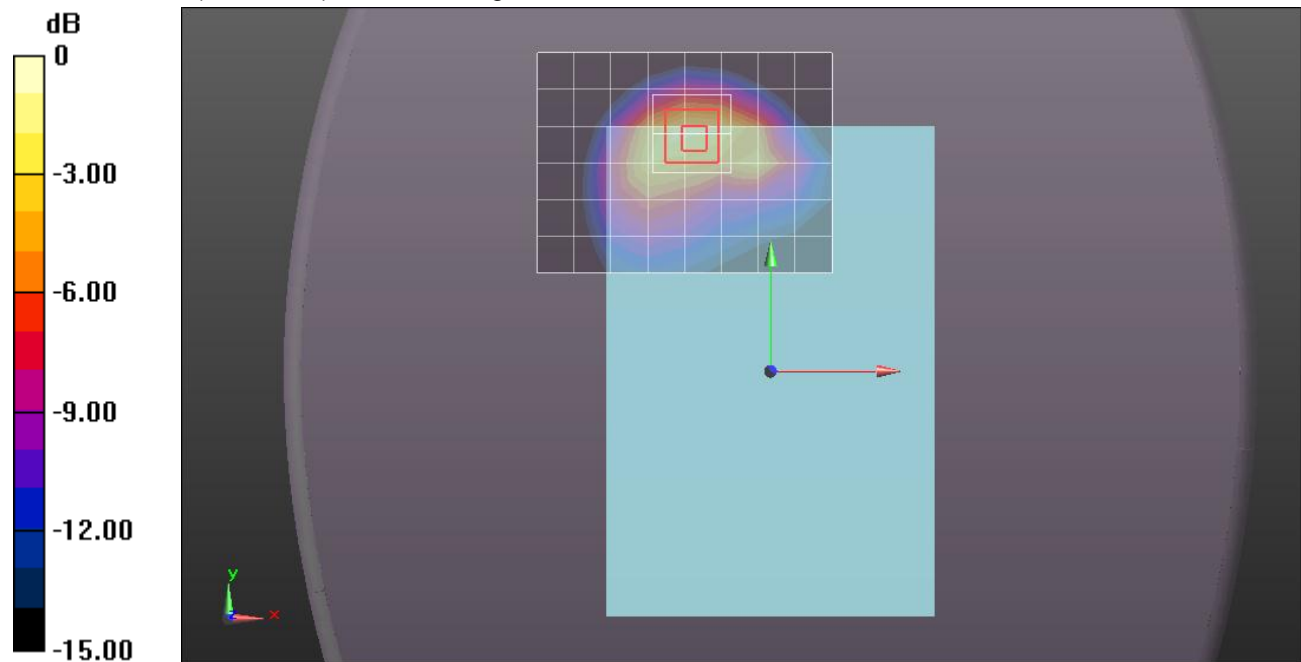

0 dB = 1.320mW/g = 2.41 dB mW/g

CDMA-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 53.838$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.225 mW/g

Rear/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 36.072 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.3480

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.623 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.591 mW/g

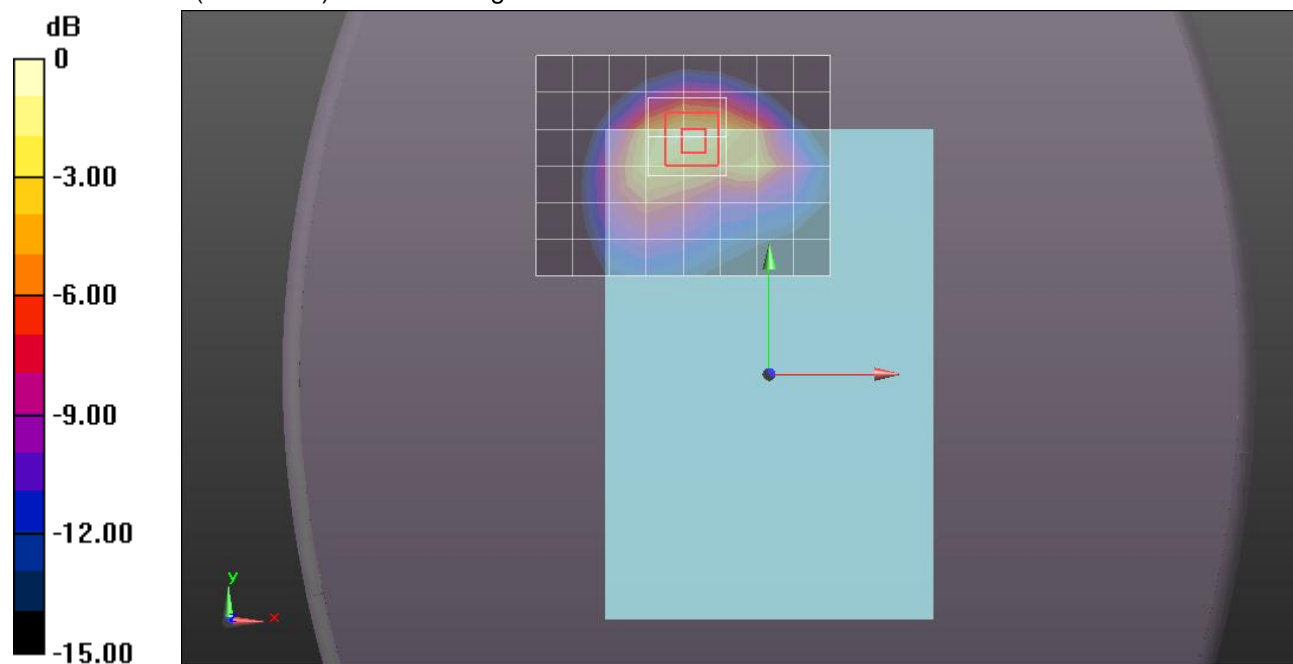

0 dB = 1.590mW/g = 4.03 dB mW/g

CDMA-BC0


Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Z Scan (1x1x21): Measurement

grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.250 mW/g

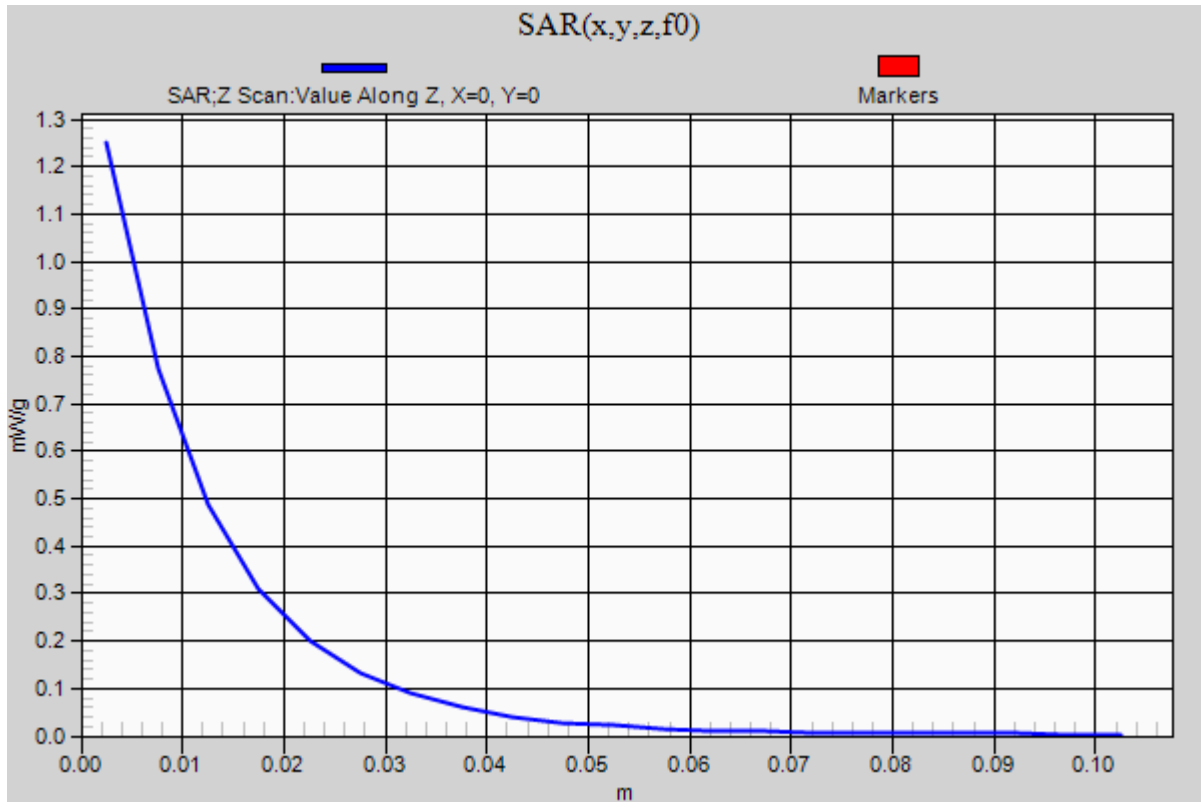

CDMA-BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r = 53.709$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32_Ch 777 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.226 mW/g

Rear/1xRTT_RC3 SO32_Ch 777 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 35.509 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.2940

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.613 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.575 mW/g

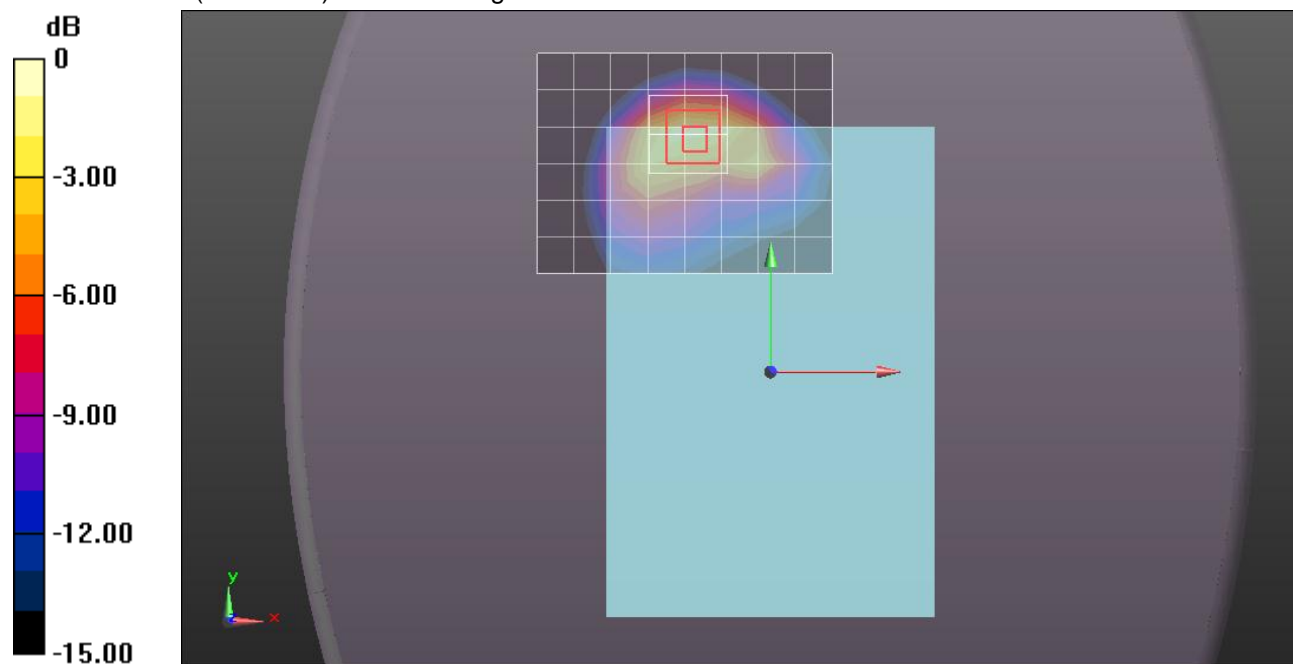

0 dB = 1.580mW/g = 3.97 dB mW/g

CDMA-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 53.838$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Pri) (0 mm)/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.637 mW/g

Edge 1/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Pri) (0 mm)/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.736 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 1.6570

SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.417 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.121 mW/g

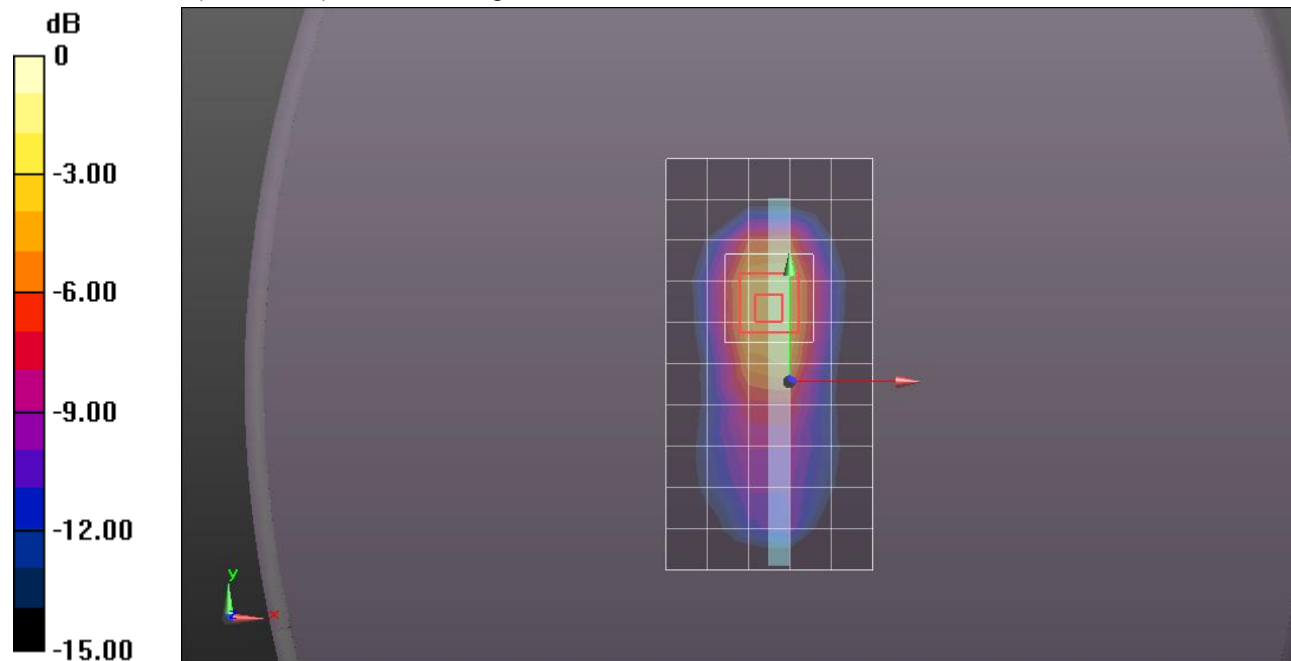

0 dB = 1.120mW/g = 0.98 dB mW/g

CDMA-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 55.181$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 2/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (6x17x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.500 mW/g

Edge 2/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.862 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.0750

SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.285 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.765 mW/g

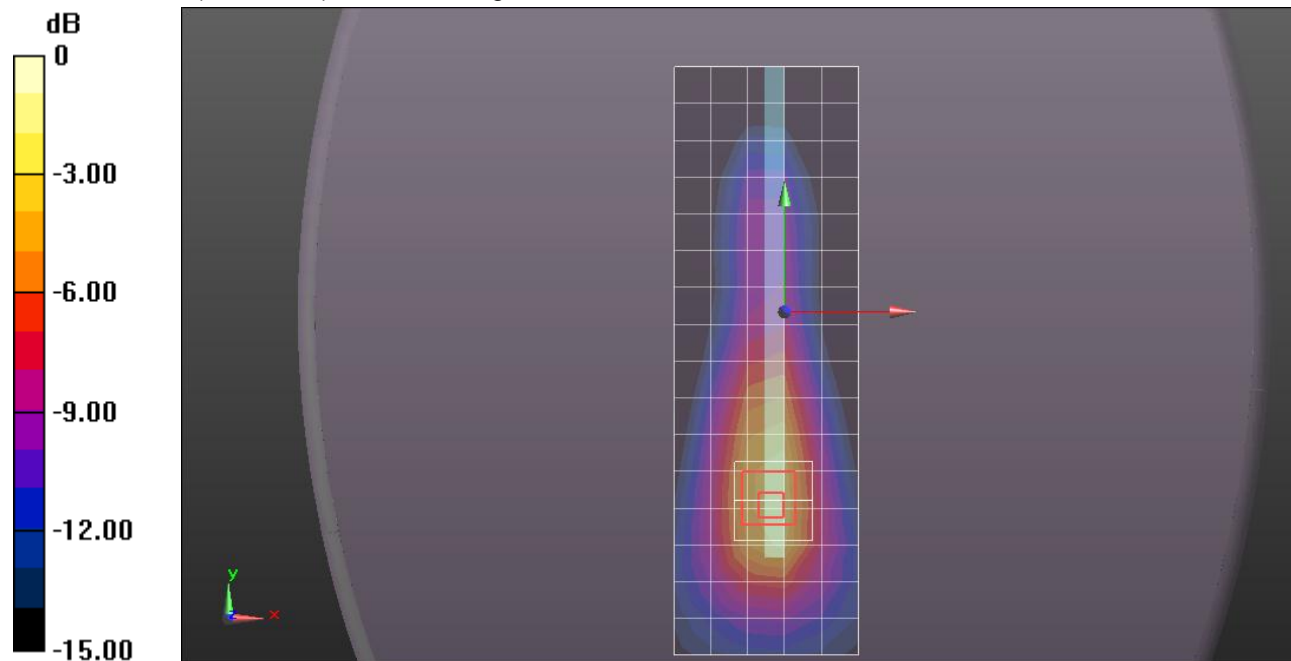

0 dB = 0.770mW/g = -2.27 dB mW/g

CDMA-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 55.181$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1 and Edge 2 Tilt 40 deg/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.399 mW/g

Edge 1 and Edge 2 Tilt 40 deg/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.547 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 1.9280

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.275 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.127 mW/g

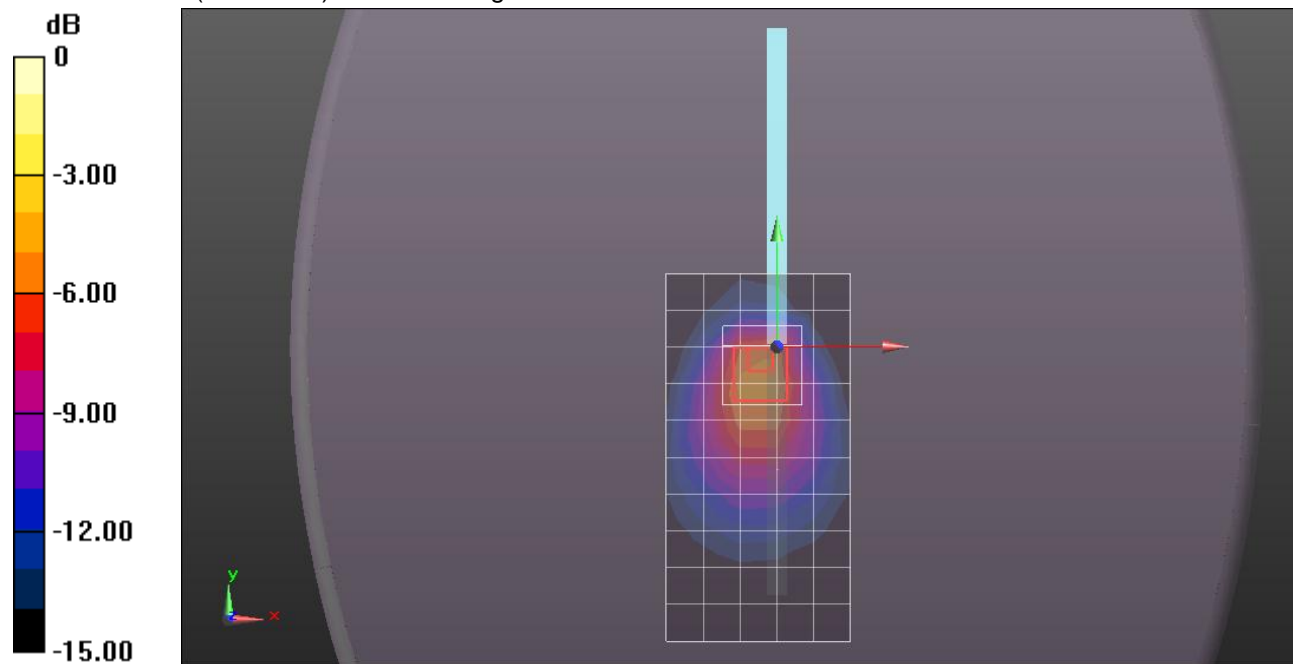

0 dB = 1.130mW/g = 1.06 dB mW/g

CDMA-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 55.181$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 2 Tilt 35 deg/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.785 mW/g

Edge 2 Tilt 35 deg/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.303 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.3230

SAR(1 g) = 0.764 mW/g; SAR(10 g) = 0.469 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.982 mW/g

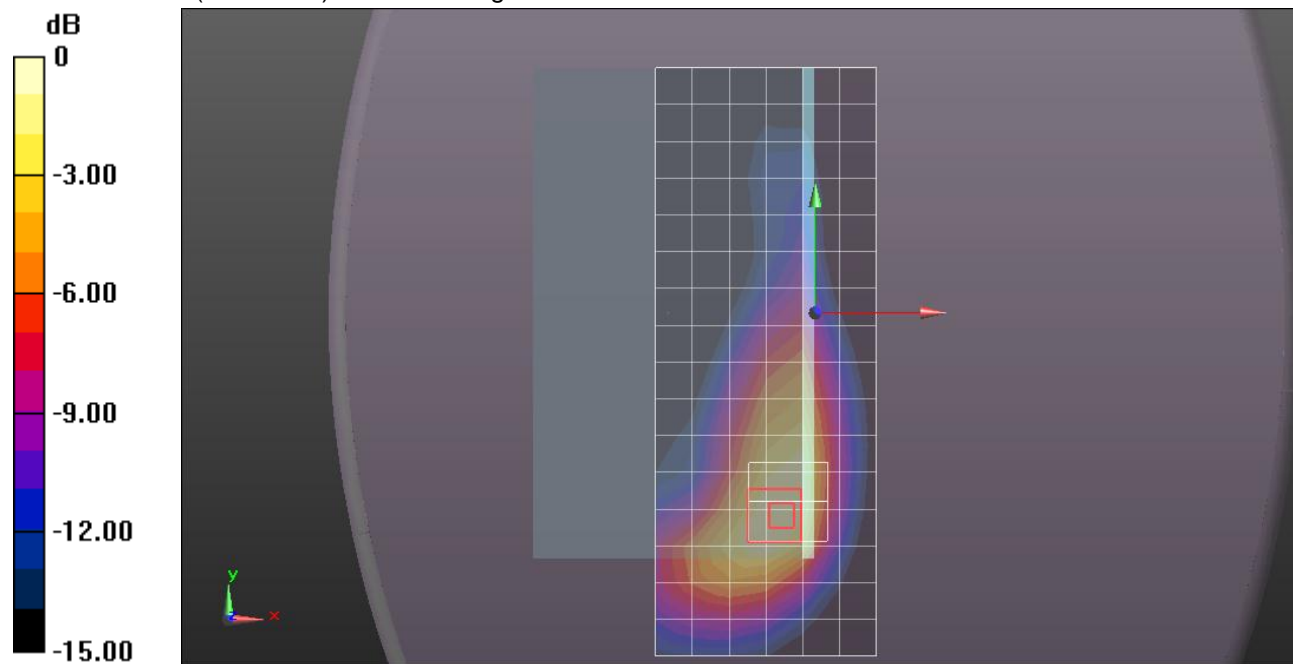

0 dB = 0.980mW/g = -0.18 dB mW/g

CDMA-BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 55.26$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32_Ch 1013 w/o Pwr back-off (14 mm)/Area Scan (9x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.800 mW/g

Rear/1xRTT_RC3 SO32_Ch 1013 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.159 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.0200

SAR(1 g) = 0.693 mW/g; SAR(10 g) = 0.451 mW/g

Maximum value of SAR (measured) = 0.838 mW/g

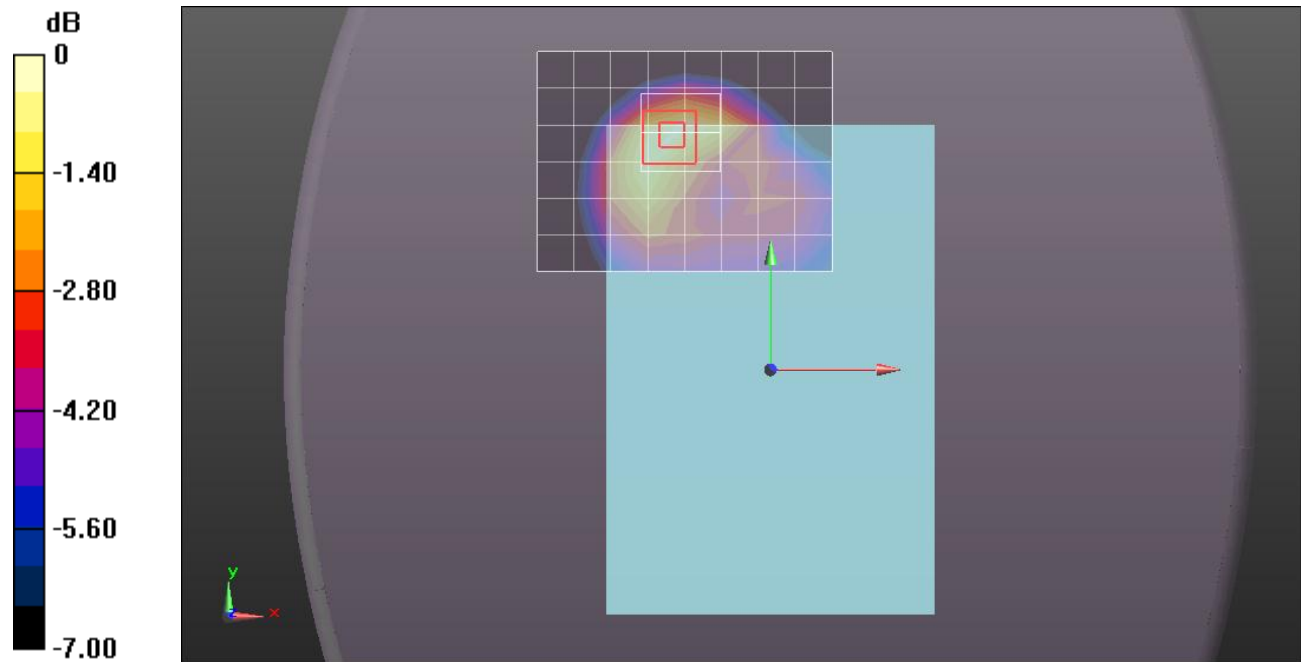

0 dB = 0.840mW/g = -1.51 dB mW/g

CDMA-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 55.181$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32_Ch 384 w/o Pwr back-off (14 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.940 mW/g

Rear/1xRTT_RC3 SO32_Ch 384 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.515 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.1780

SAR(1 g) = 0.806 mW/g; SAR(10 g) = 0.526 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.978 mW/g

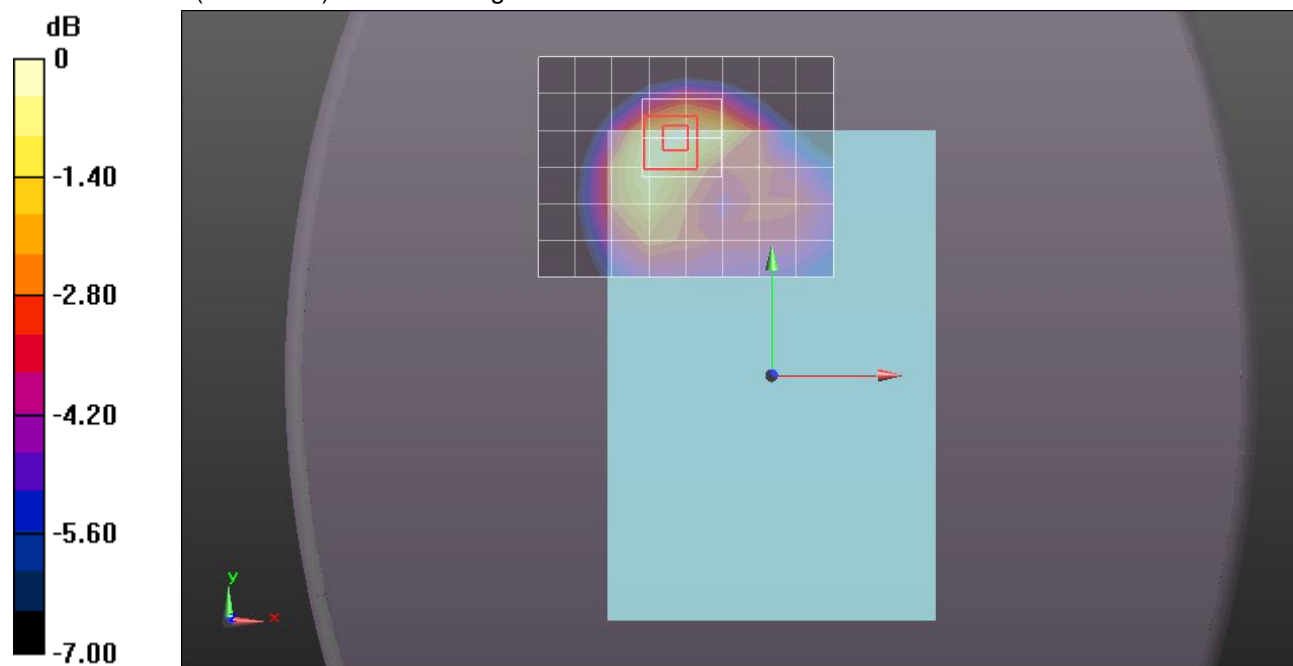

0 dB = 0.980mW/g = -0.18 dB mW/g

CDMA-BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 55.181$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32_Ch 777 w/o Pwr back-off (14 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.001 mW/g

Rear/1xRTT_RC3 SO32_Ch 777 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.377 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.2660

SAR(1 g) = 0.860 mW/g; SAR(10 g) = 0.557 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.051 mW/g

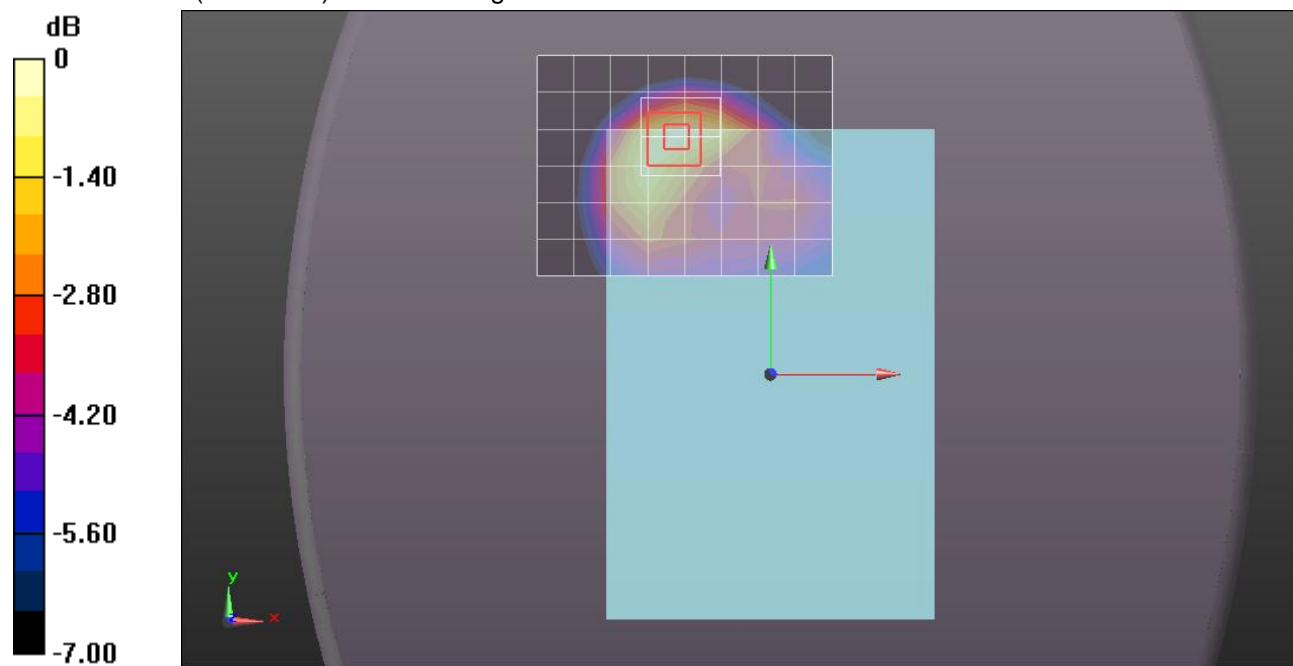

0 dB = 1.050mW/g = 0.42 dB mW/g

CDMA-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 55.181$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/1xRTT_RC3 SO32_Ch 384 w/o Pwr back-off (14 mm)/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.552 mW/g

Edge 1/1xRTT_RC3 SO32_Ch 384 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 24.732 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.8090

SAR(1 g) = 0.578 mW/g; SAR(10 g) = 0.391 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.685 mW/g

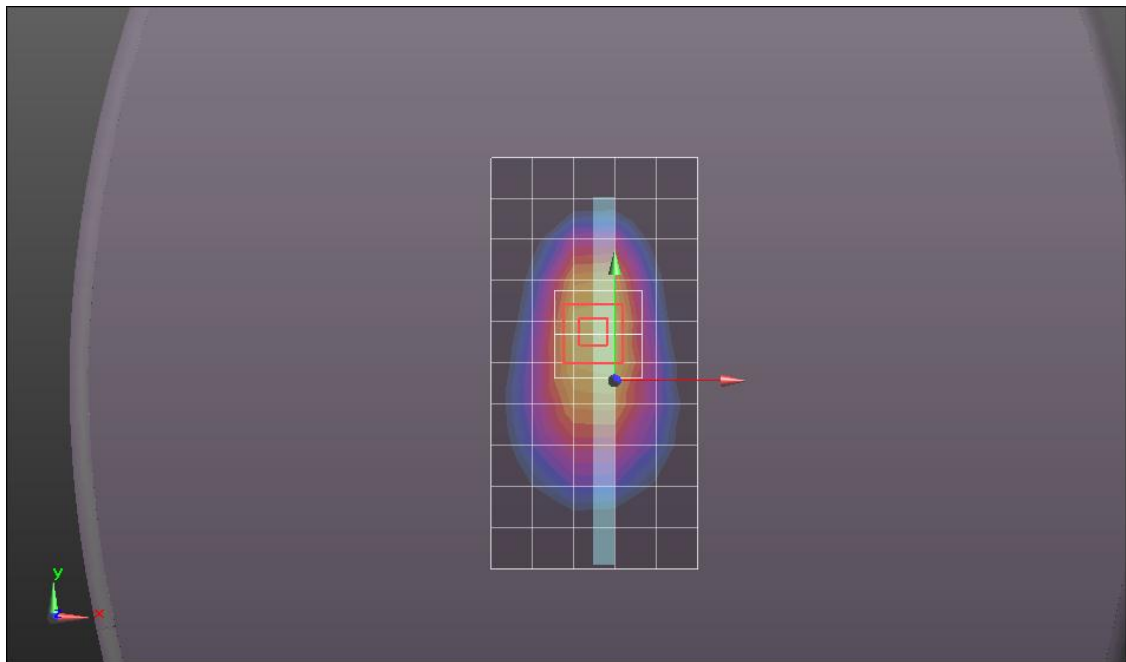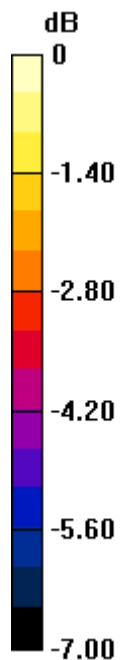

0 dB = 0.690mW/g = -3.22 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.287$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rel 0_Ch 1013 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.043 mW/g

Rear/1xEV-DO_Rel 0_Ch 1013 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.225 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.9360

SAR(1 g) = 0.970 mW/g; SAR(10 g) = 0.510 mW/g

Maximum value of SAR (measured) = 1.355 mW/g

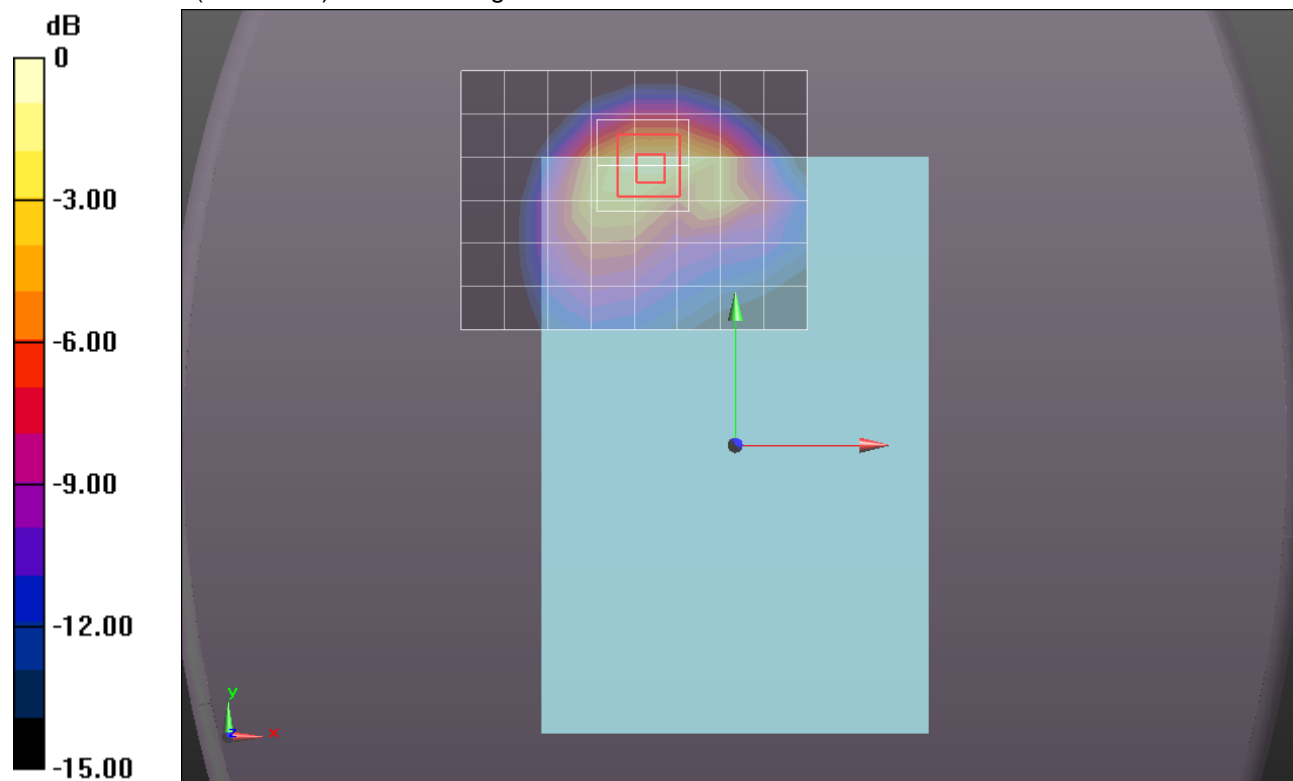

0 dB = 1.360mW/g = 2.67 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.230 mW/g

Rear/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 35.703 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.2100

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.599 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.581 mW/g

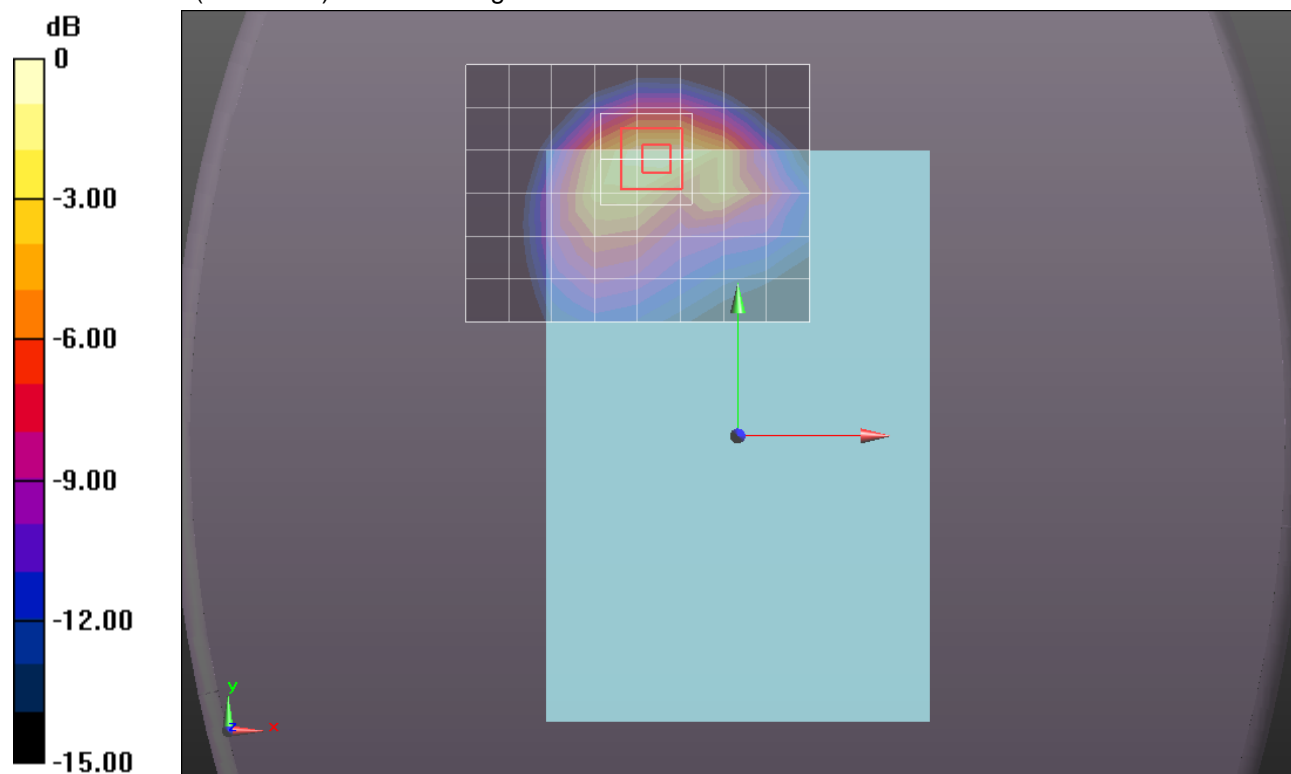

0 dB = 1.580mW/g = 3.97 dB mW/g

CDMA BC0


Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Z Scan (1x1x21): Measurement

grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.236 mW/g

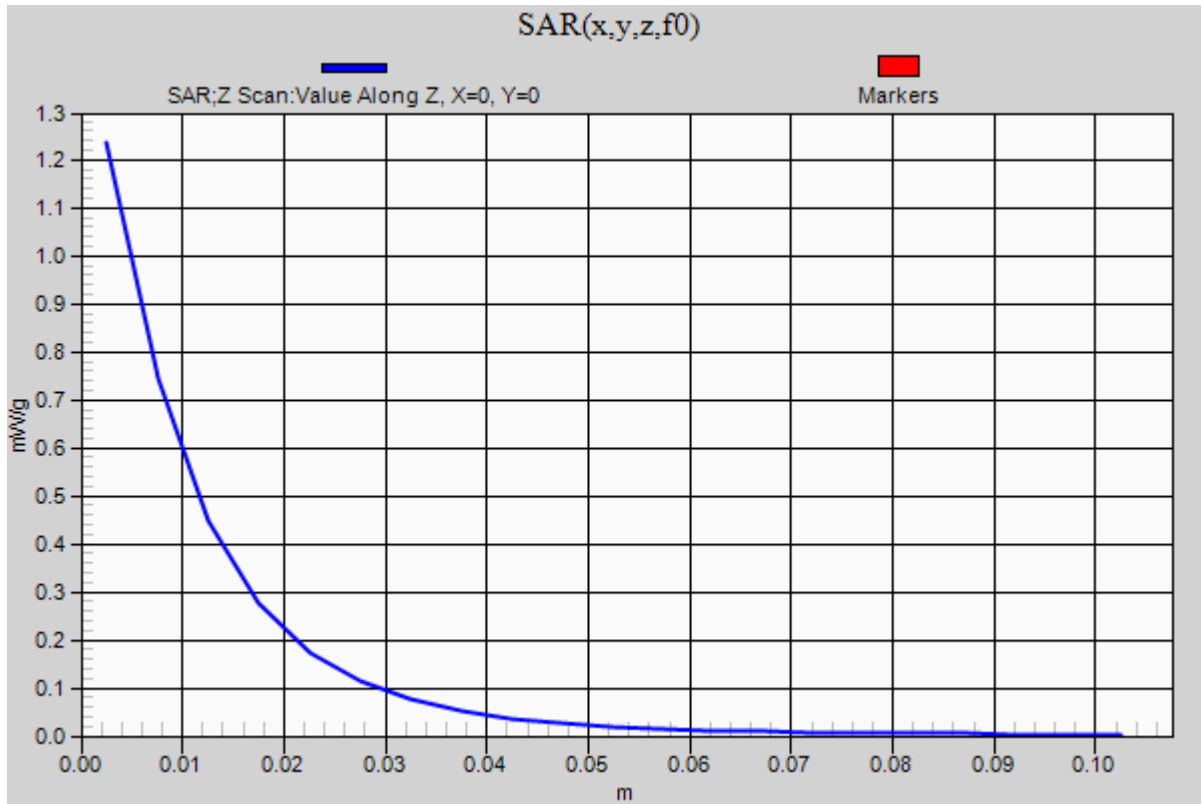

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 54.131$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rel 0_Ch 777 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.231 mW/g

Rear/1xEV-DO_Rel 0_Ch 777 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 35.406 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.2000

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.592 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.574 mW/g

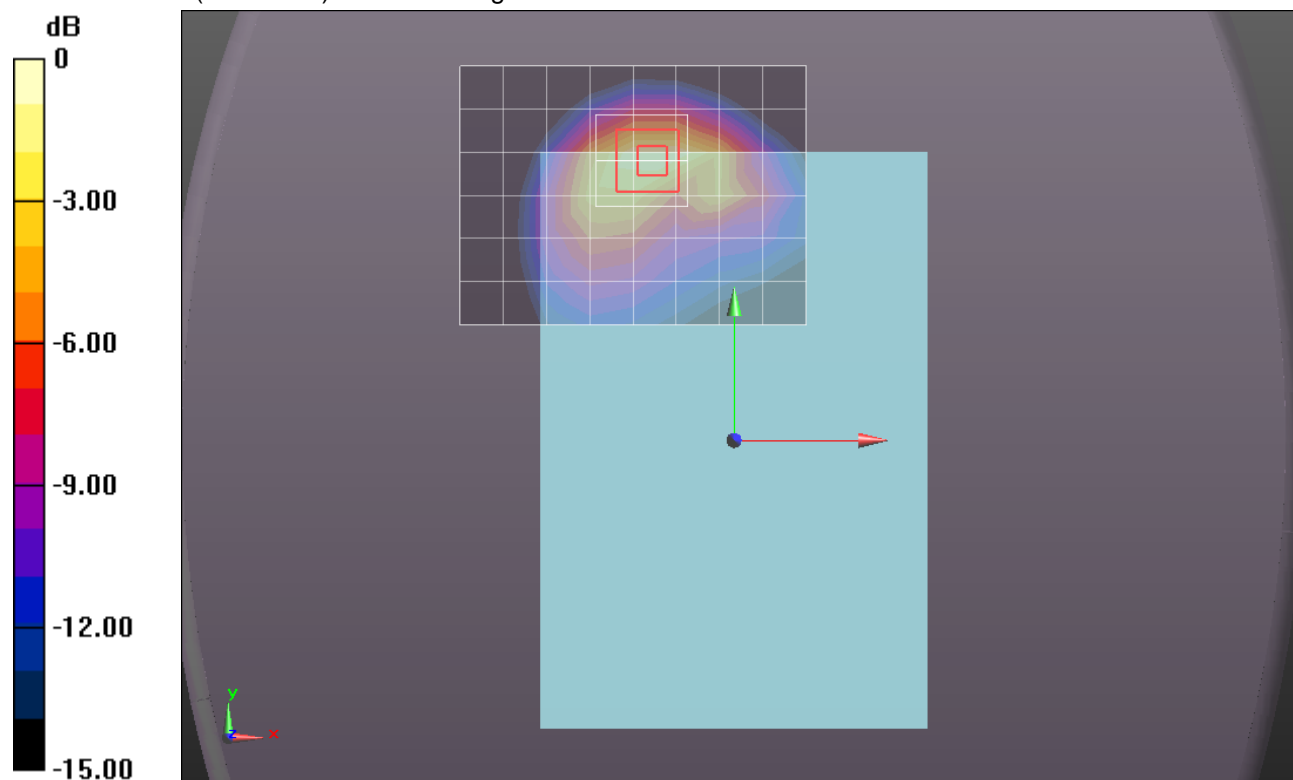

0 dB = 1.570mW/g = 3.92 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Pri) (0 mm)/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.621 mW/g

Edge 1/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Pri) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.350 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.5230

SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.384 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.059 mW/g

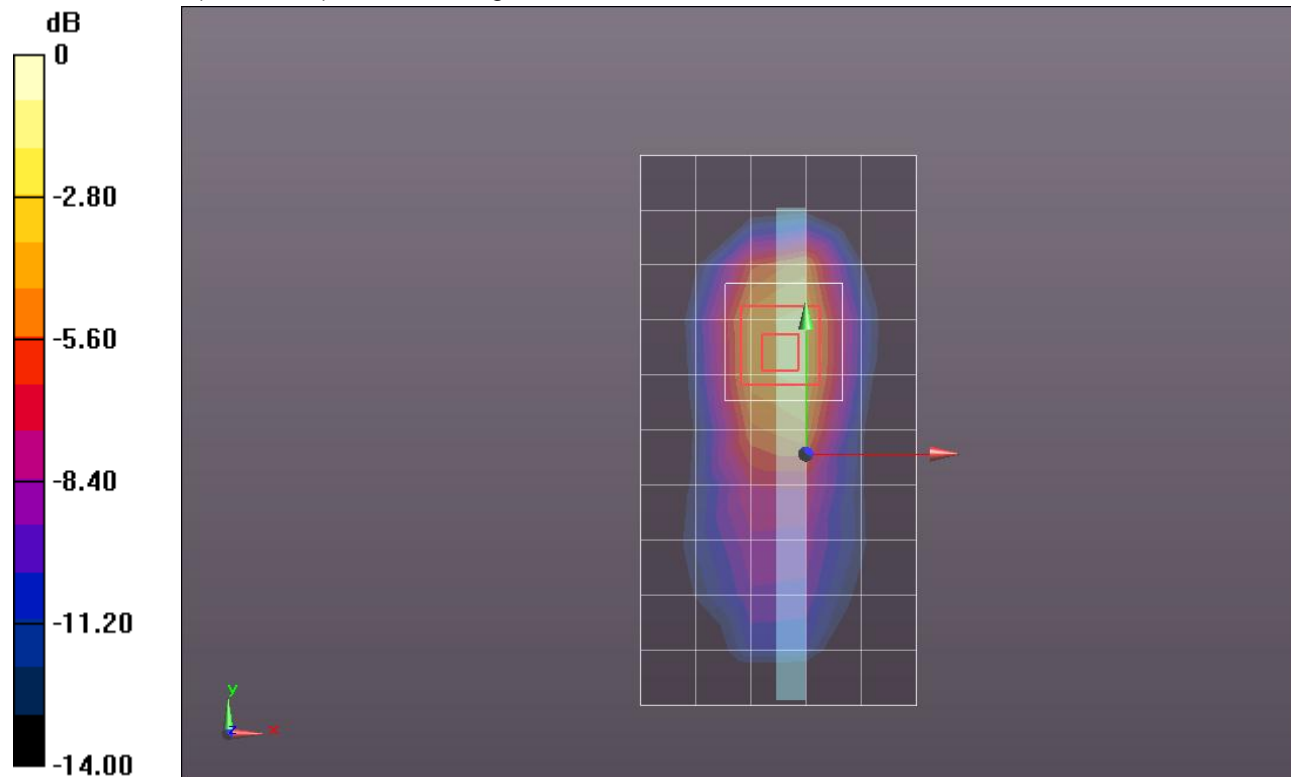

0 dB = 1.060mW/g = 0.51 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 2/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (6x17x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.803 mW/g

Edge 2/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.744 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 1.2420

SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.304 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.842 mW/g

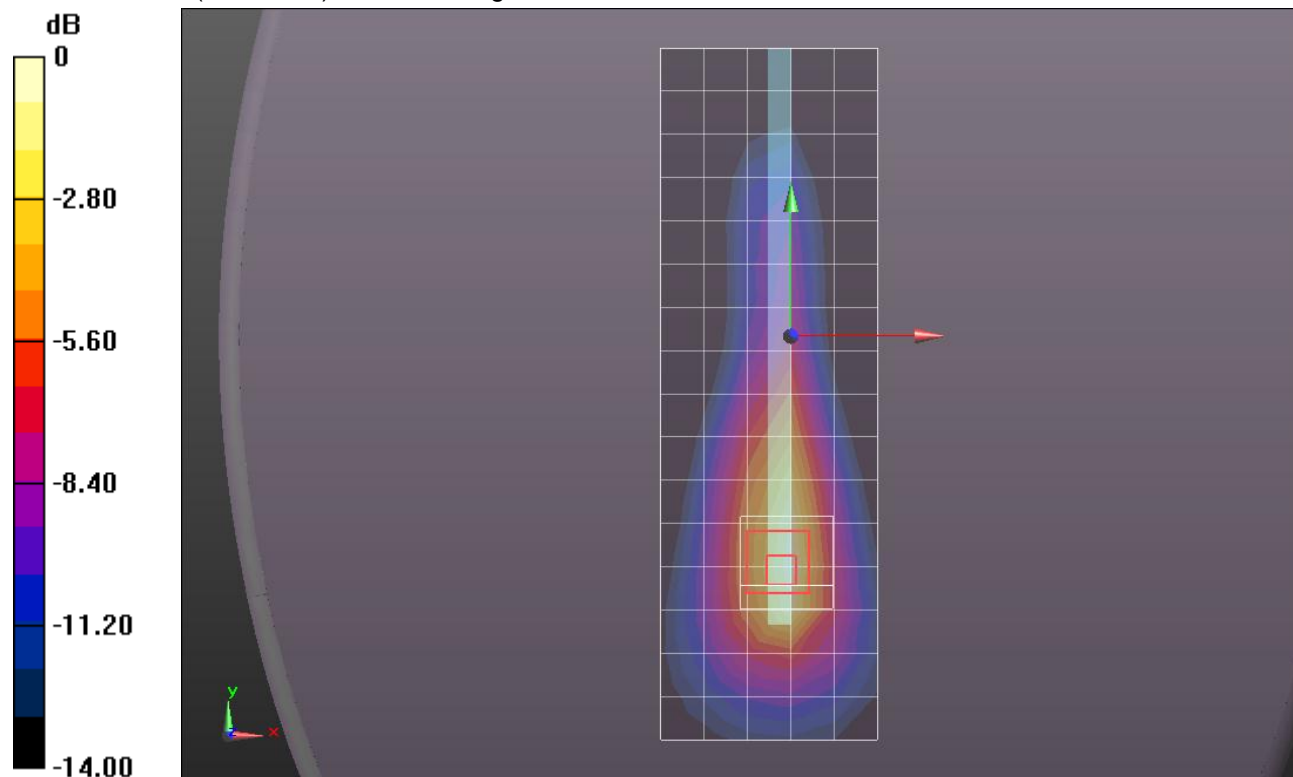

0 dB = 0.840mW/g = -1.51 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1 and Edge 2 Tilt 40 deg/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.762 mW/g

Edge 1 and Edge 2 Tilt 40 deg/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.882 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 1.5810

SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.288 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.911 mW/g

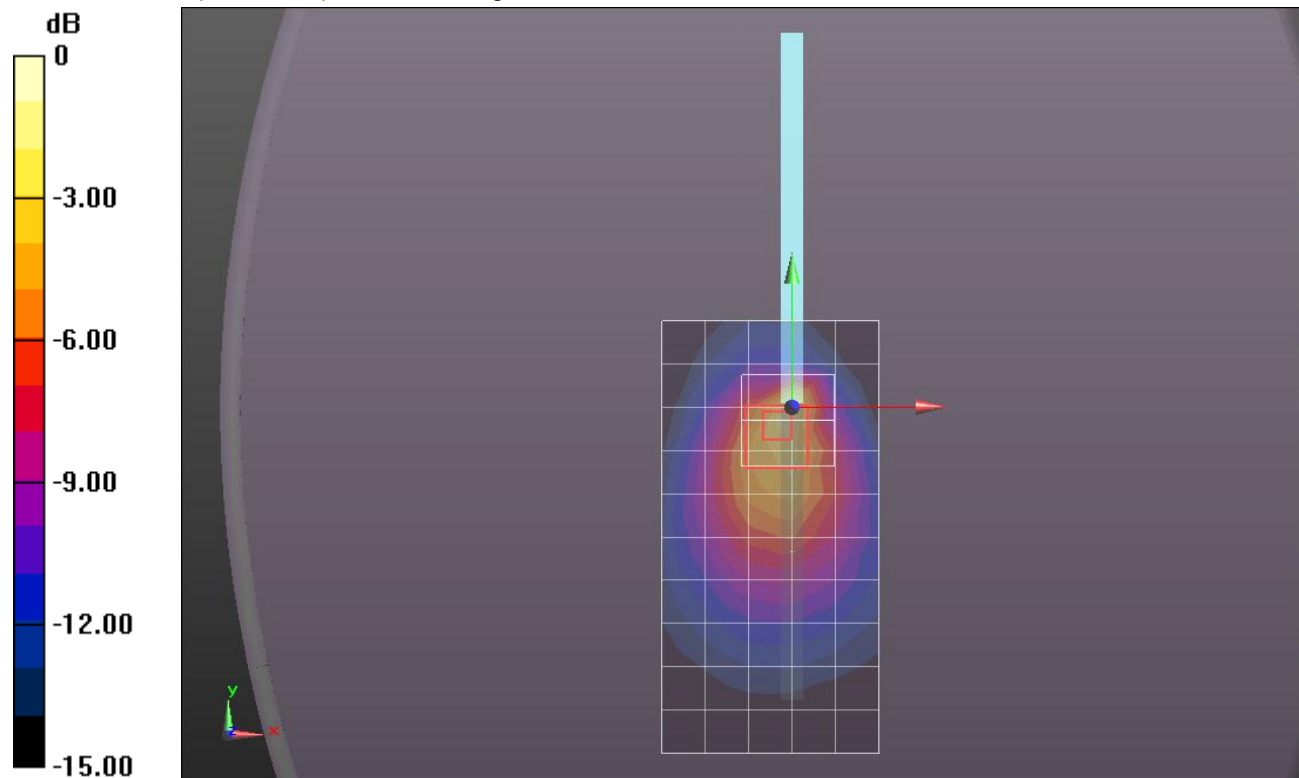

0 dB = 0.910mW/g = -0.82 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 2 Tilt 35 deg/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan

(7x17x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.824 mW/g

Edge 2 Tilt 35 deg/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 29.161 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.3300

SAR(1 g) = 0.781 mW/g; SAR(10 g) = 0.479 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.985 mW/g

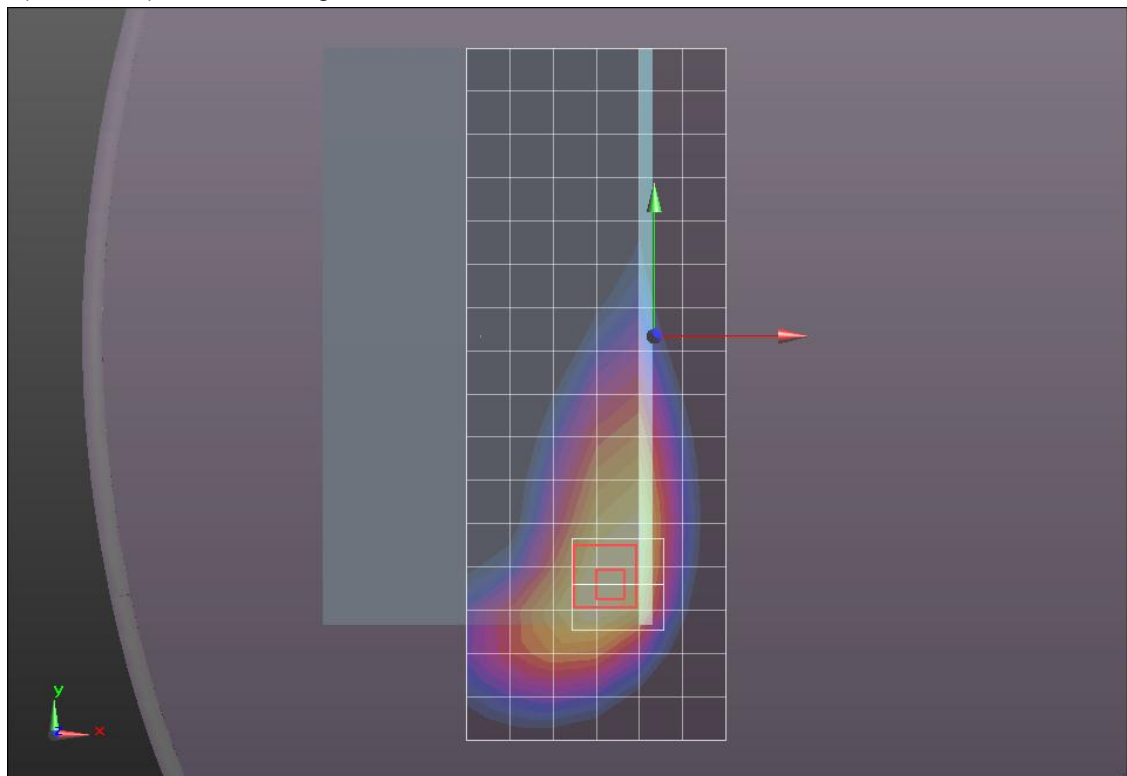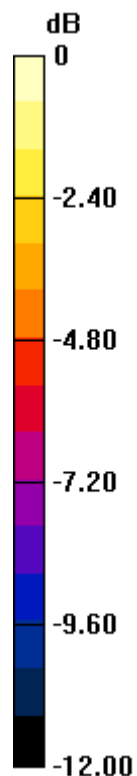

0 dB = 0.980mW/g = -0.18 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.287$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rel 0_Ch 1013 w/o Pwr back-off (14 mm)/Area Scan (9x7x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.825 mW/g

Rear/1xEV-DO_Rel 0_Ch 1013 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.702 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.0840

SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.456 mW/g

Maximum value of SAR (measured) = 0.884 mW/g

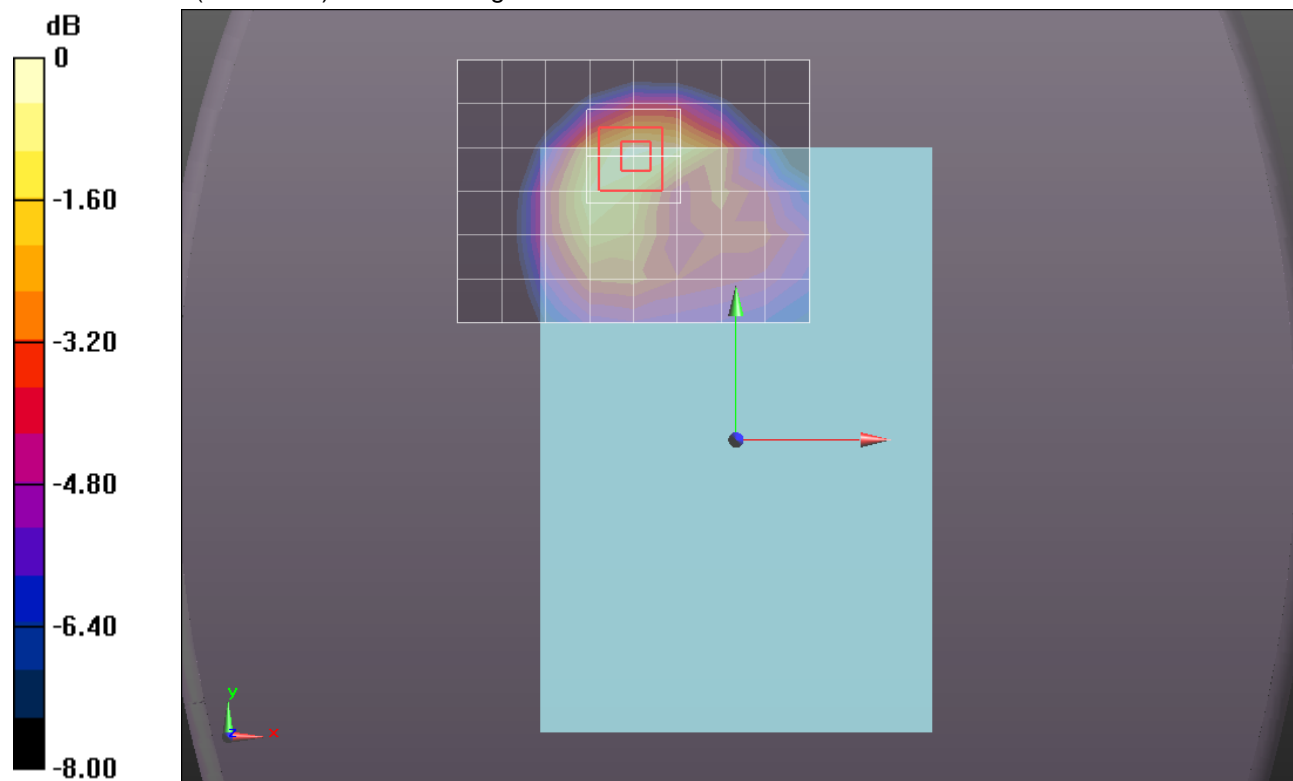

0 dB = 0.880mW/g = -1.11 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rel 0_Ch 384 w/o Pwr back-off (14 mm)/Area Scan (9x7x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.968 mW/g

Rear/1xEV-DO_Rel 0_Ch 384 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.214 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.2470

SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.524 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.019 mW/g

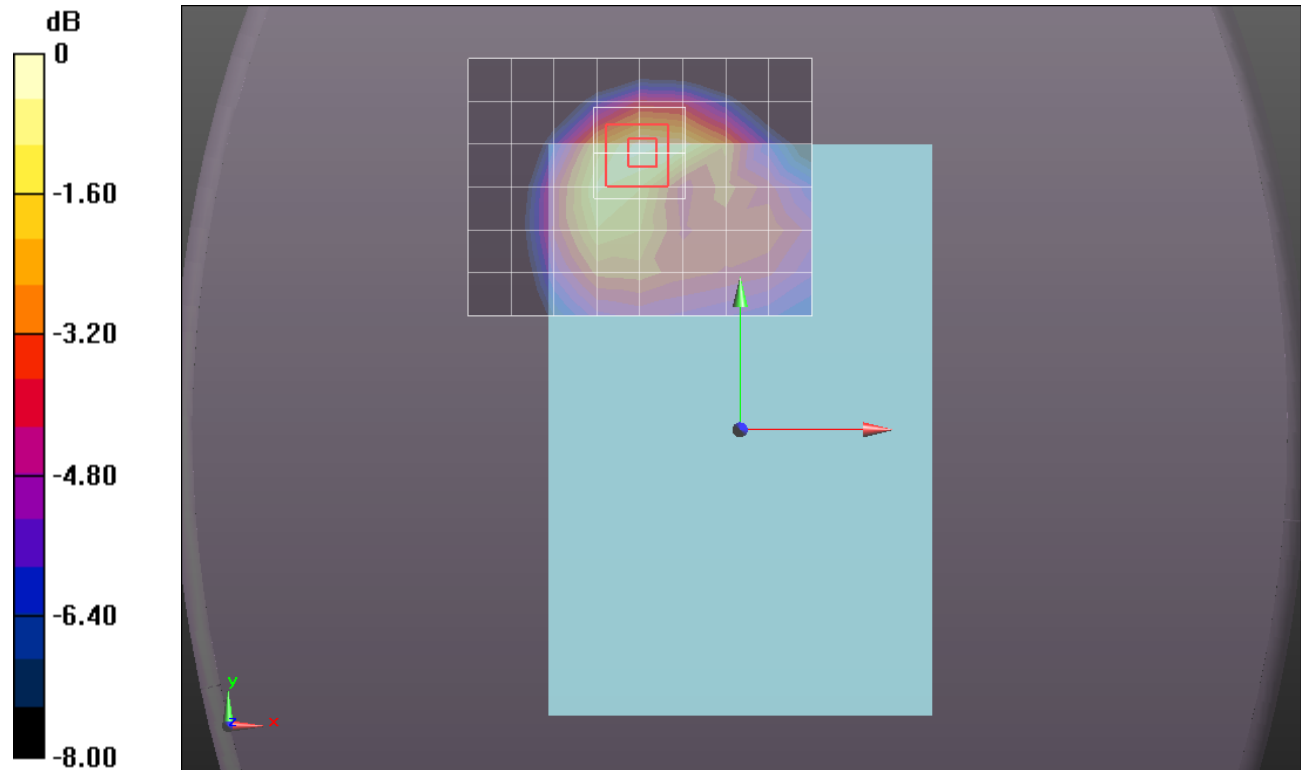

0 dB = 1.020mW/g = 0.17 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 54.131$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rel 0_Ch 777 w/o Pwr back-off (14 mm)/Area Scan (9x7x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.000 mW/g

Rear/1xEV-DO_Rel 0_Ch 777 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.280 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.2780

SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.542 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.047 mW/g

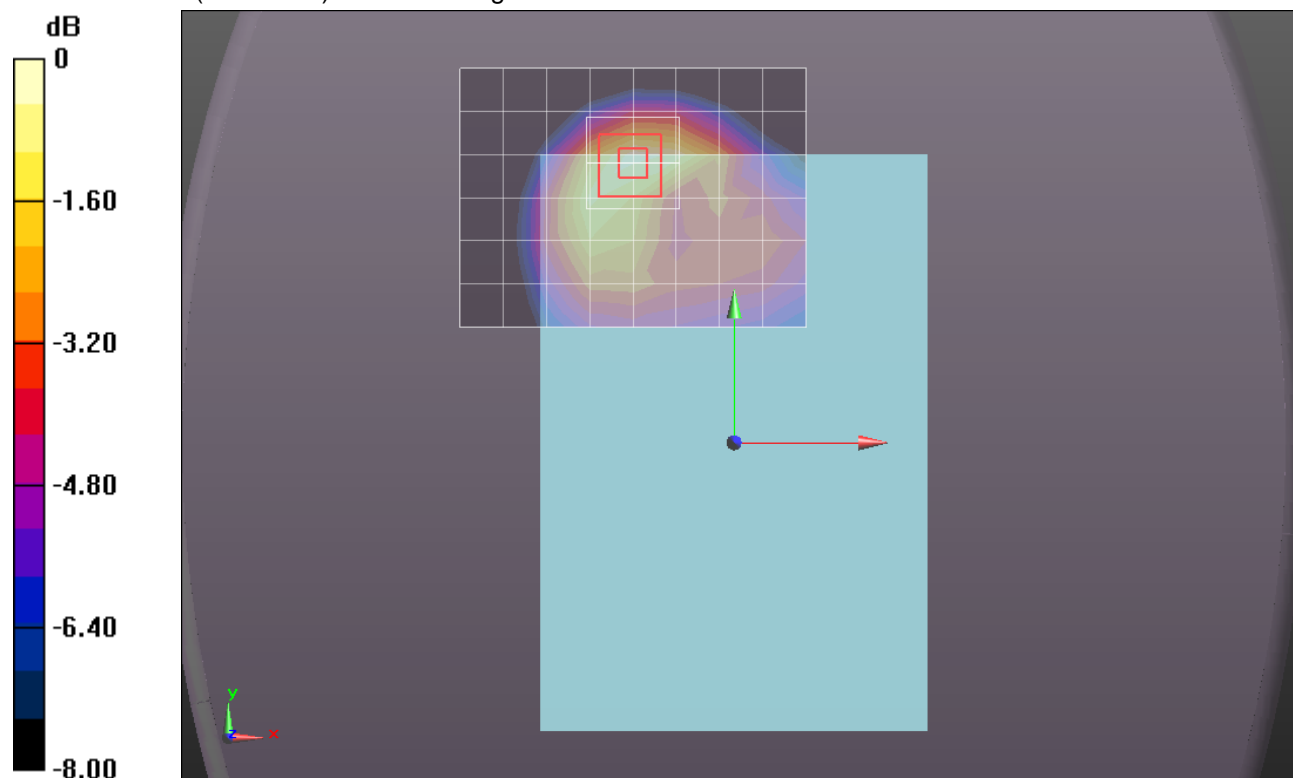

0 dB = 1.050mW/g = 0.42 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/1xEV-DO_Rel 0_Ch 384 w/o Pwr back-off (14 mm)/Area Scan (6x11x1): Measurement

grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.650 mW/g

Edge 1/1xEV-DO_Rel 0_Ch 384 w/o Pwr back-off (14 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.857 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.7710

SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.360 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.657 mW/g

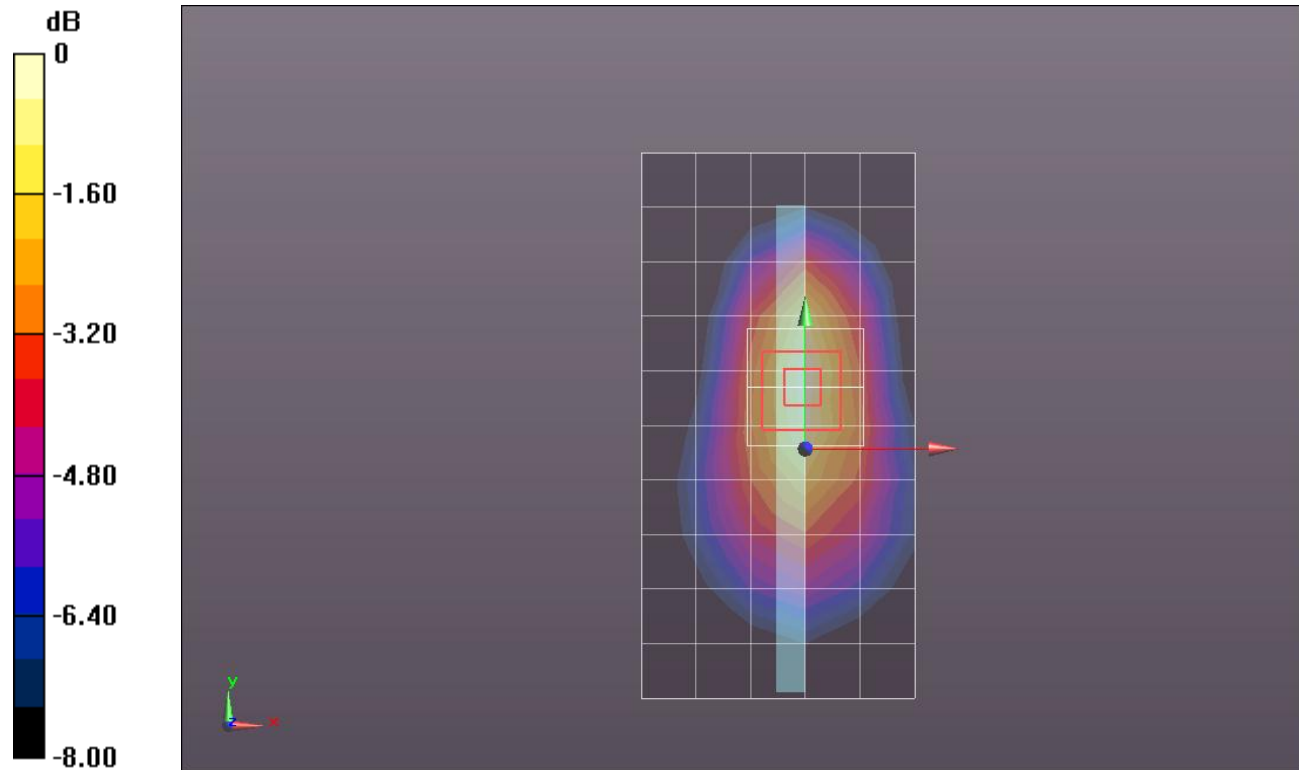

0 dB = 0.660mW/g = -3.61 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 54.43$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 1013 w/ Pwr back-off (Pri.) (0 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.199 mW/g

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 1013 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.165 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.7860

SAR(1 g) = 0.914 mW/g; SAR(10 g) = 0.477 mW/g

Maximum value of SAR (measured) = 1.273 mW/g

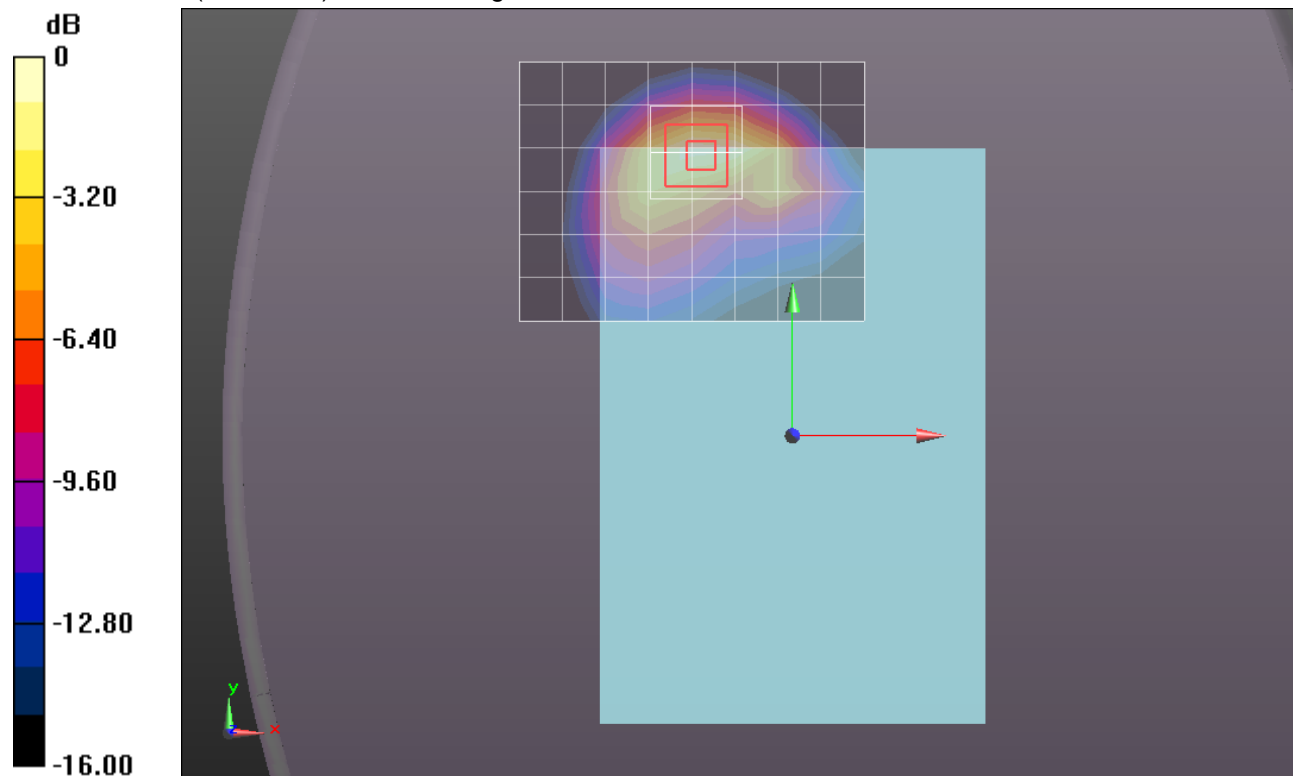

0 dB = 1.270mW/g = 2.08 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.490 mW/g

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 38.822 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.3010

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.613 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.592 mW/g

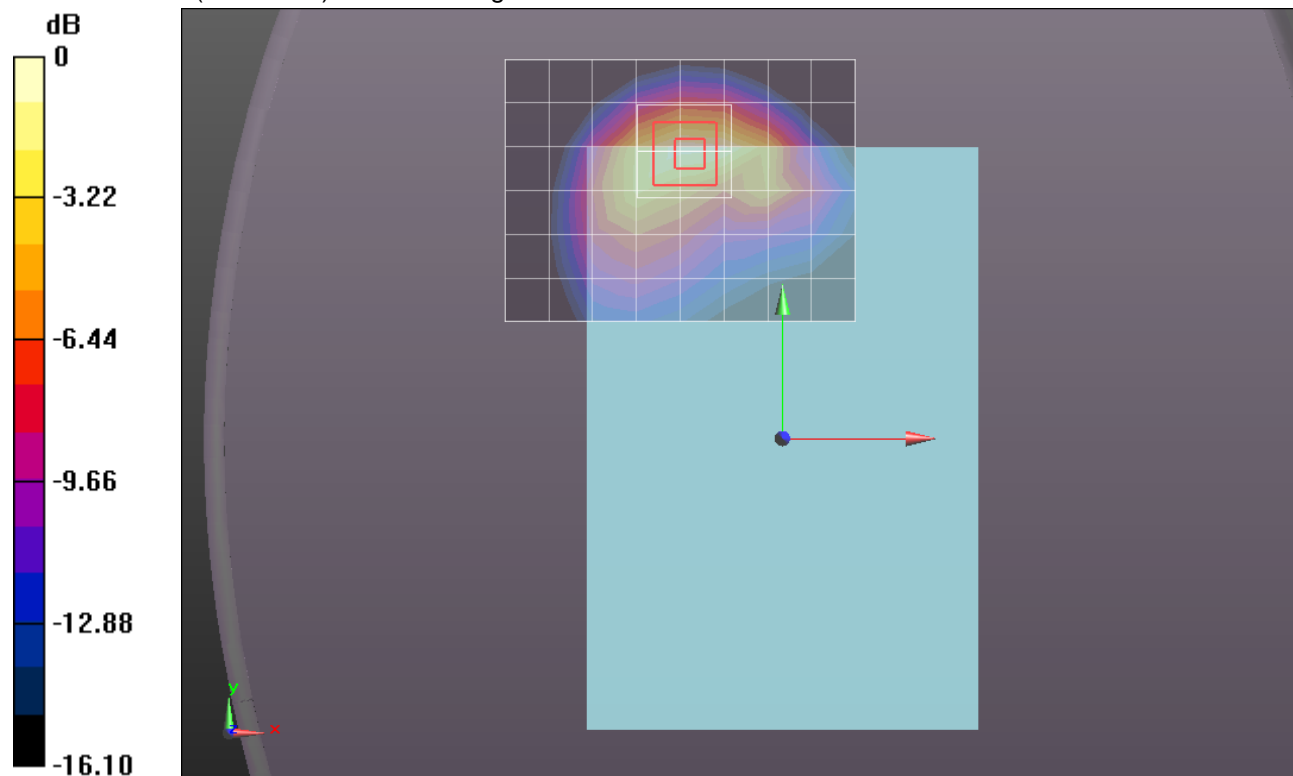

0 dB = 1.590mW/g = 4.03 dB mW/g

CDMA BC0


Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Z Scan

(1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.518 mW/g

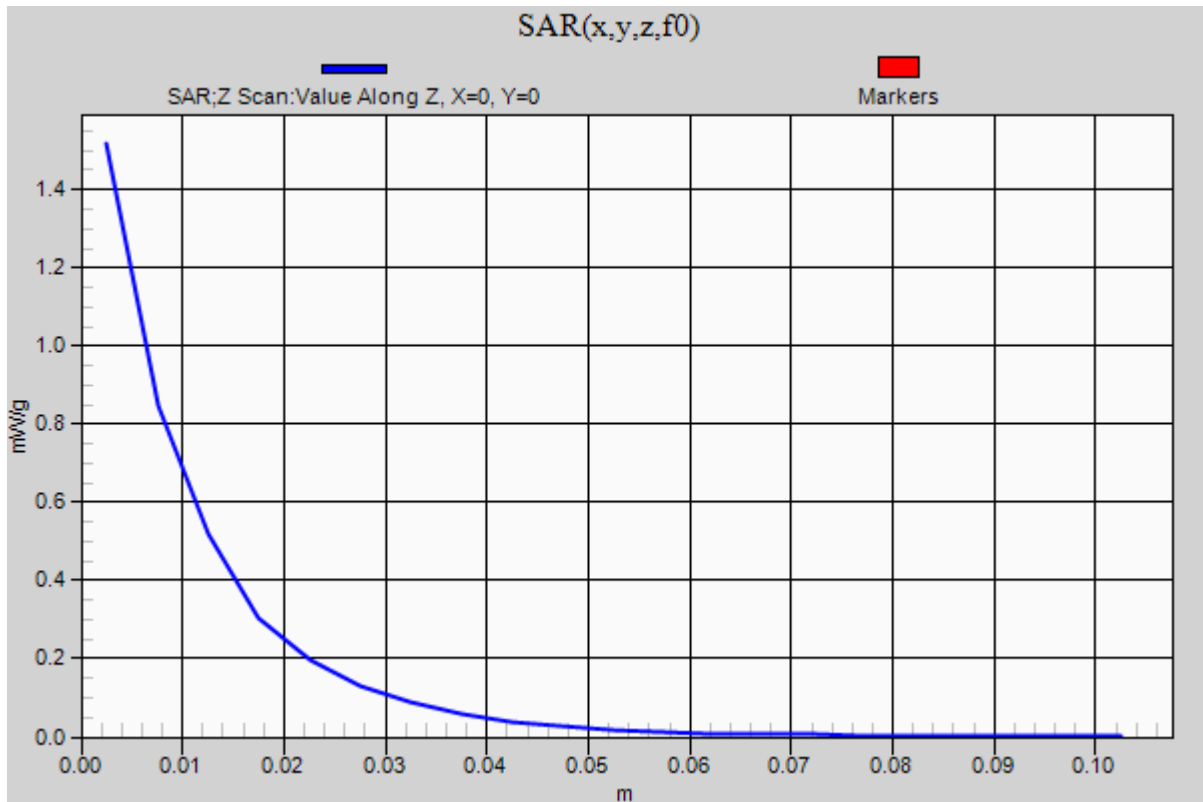

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.018$ mho/m; $\epsilon_r = 54.193$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 777 w/ Pwr back-off (Pri.) (0 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.481 mW/g

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 777 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.866 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.2600

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.586 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.609 mW/g

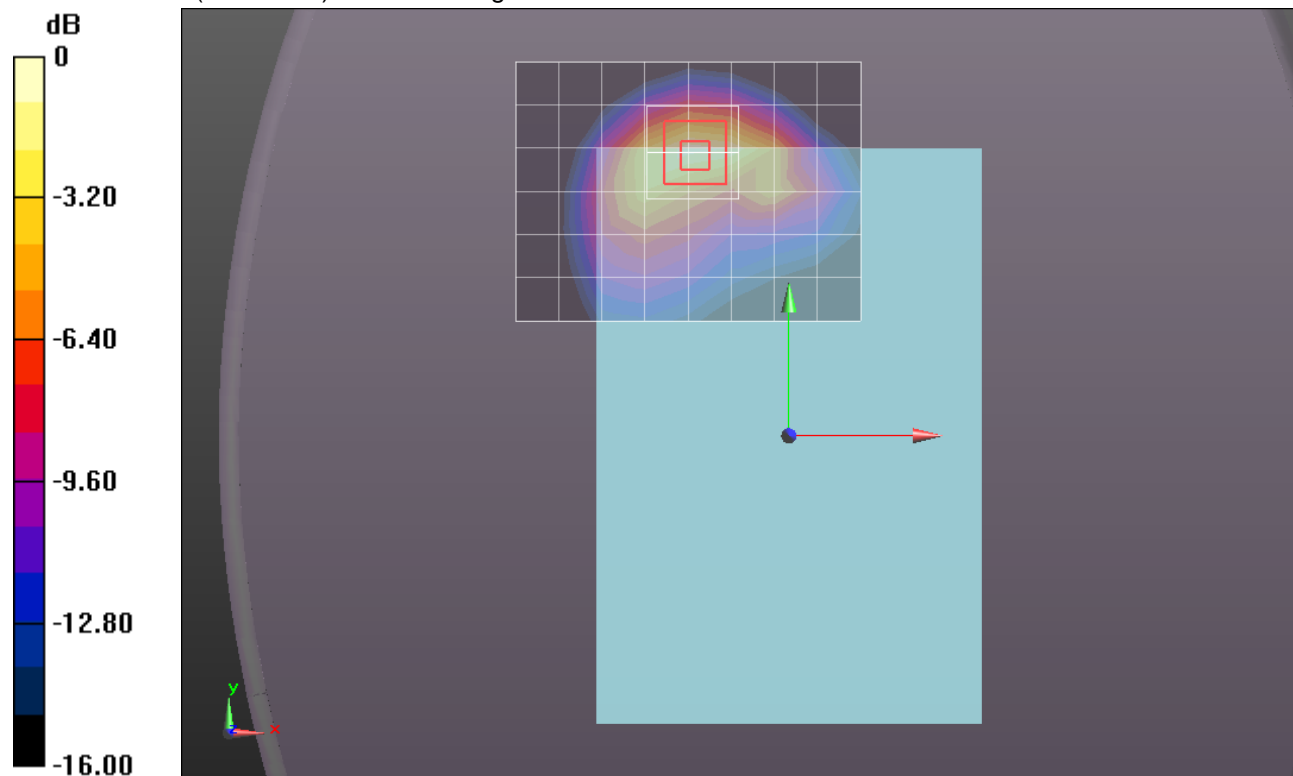

0 dB = 1.610mW/g = 4.14 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Pri) (0 mm)/Area Scan

(6x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.365 mW/g

Edge 1/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Pri) (0 mm)/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 19.100 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.4950

SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.228 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.417 mW/g

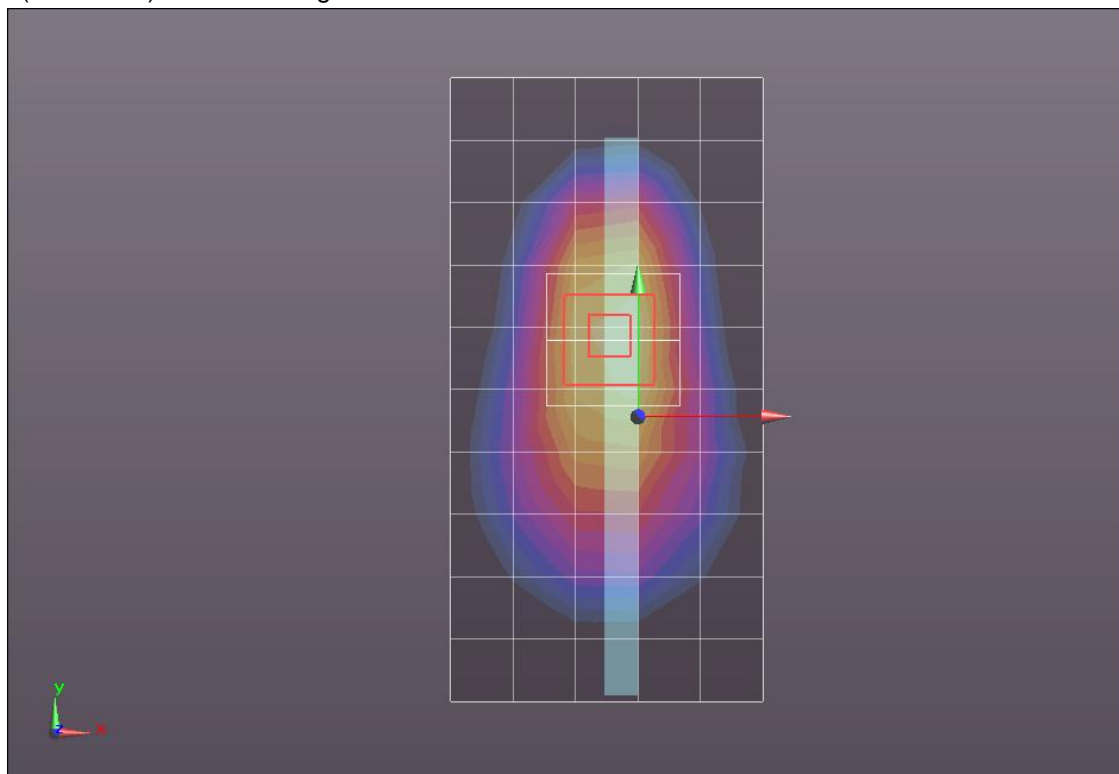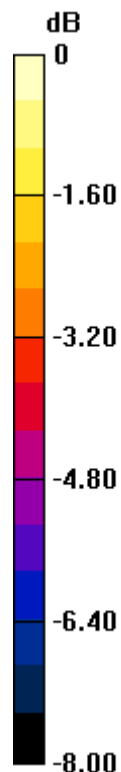

0 dB = 0.420mW/g = -7.54 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 2/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area

Scan (6x17x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.262 mW/g

Edge 2/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.030 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.5570

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.159 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.398 mW/g

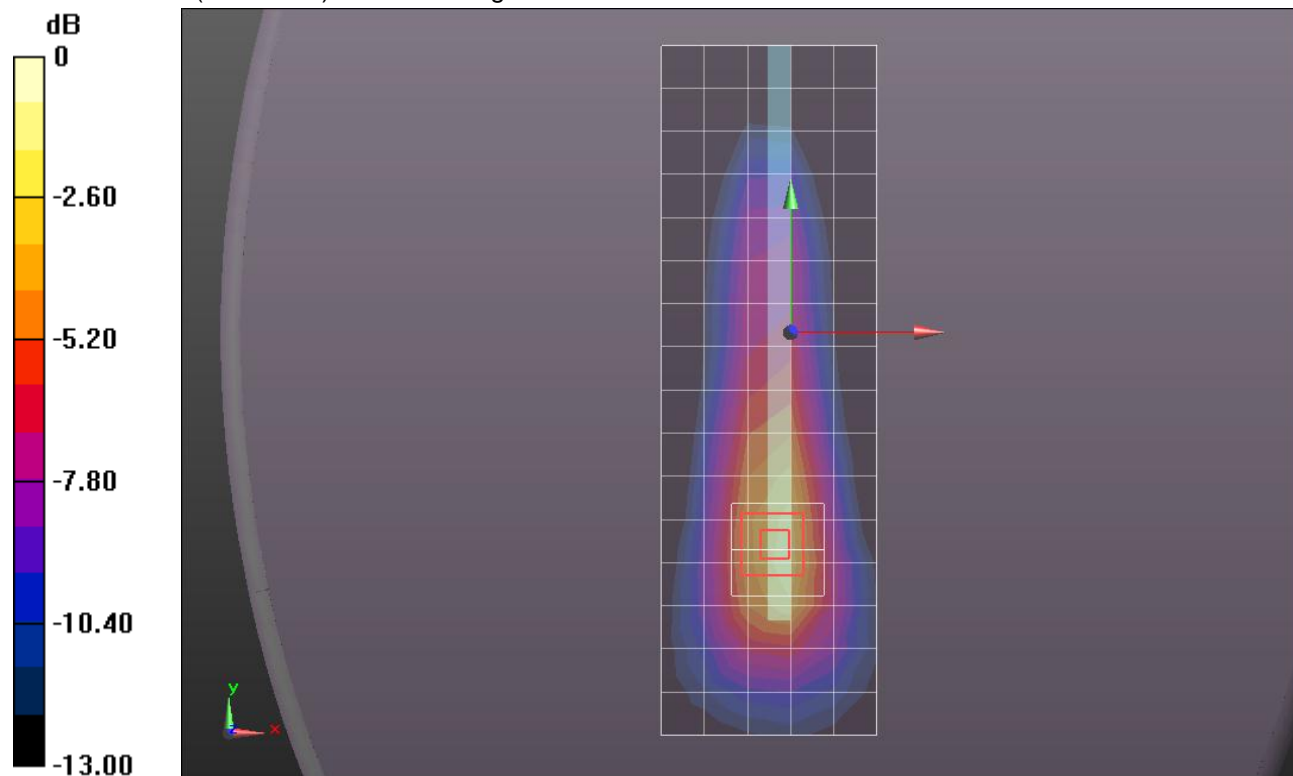

0 dB = 0.400mW/g = -7.96 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1 and Edge 2 Tilt 40 deg/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.418 mW/g

Edge 1 and Edge 2 Tilt 40 deg/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.388 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 0.8740

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.161 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.589 mW/g

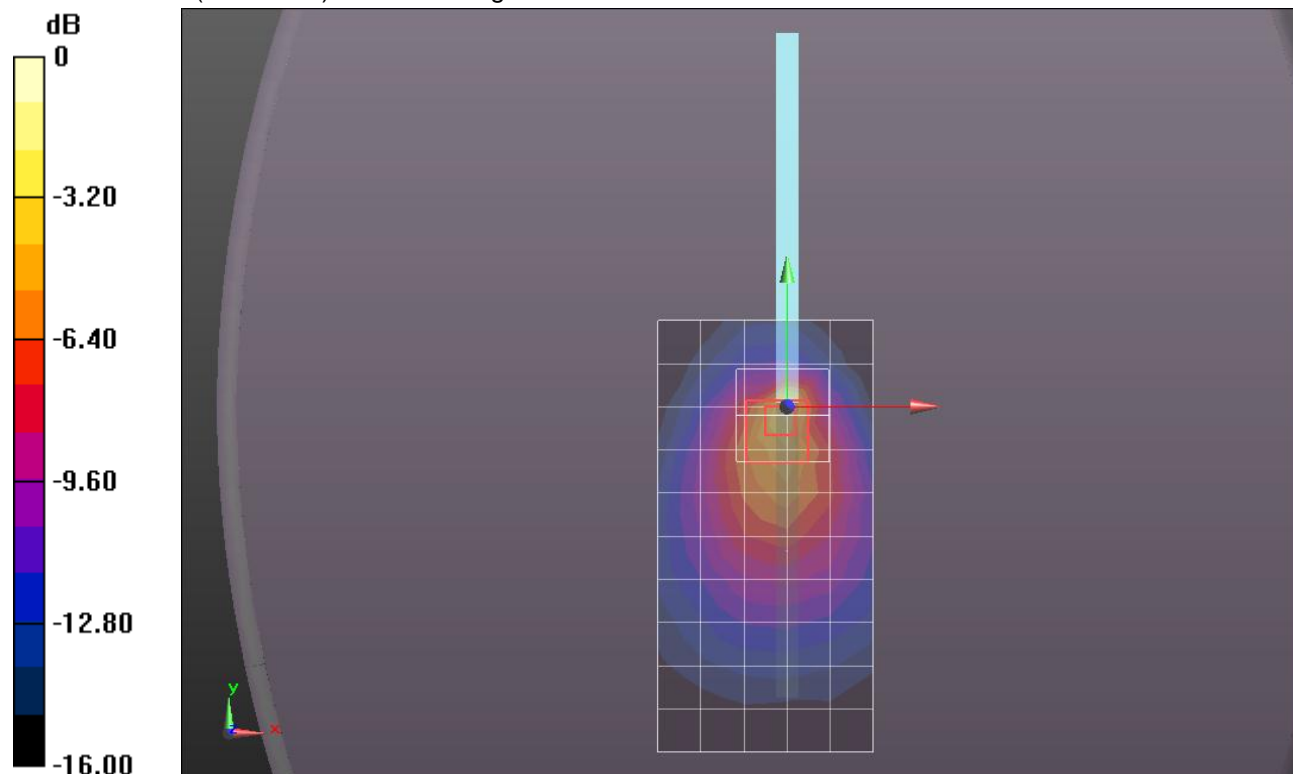

0 dB = 0.590mW/g = -4.58 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 2 Tilt 35 deg/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.525 mW/g

Edge 2 Tilt 35 deg/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.655 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.6270

SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.251 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.480 mW/g

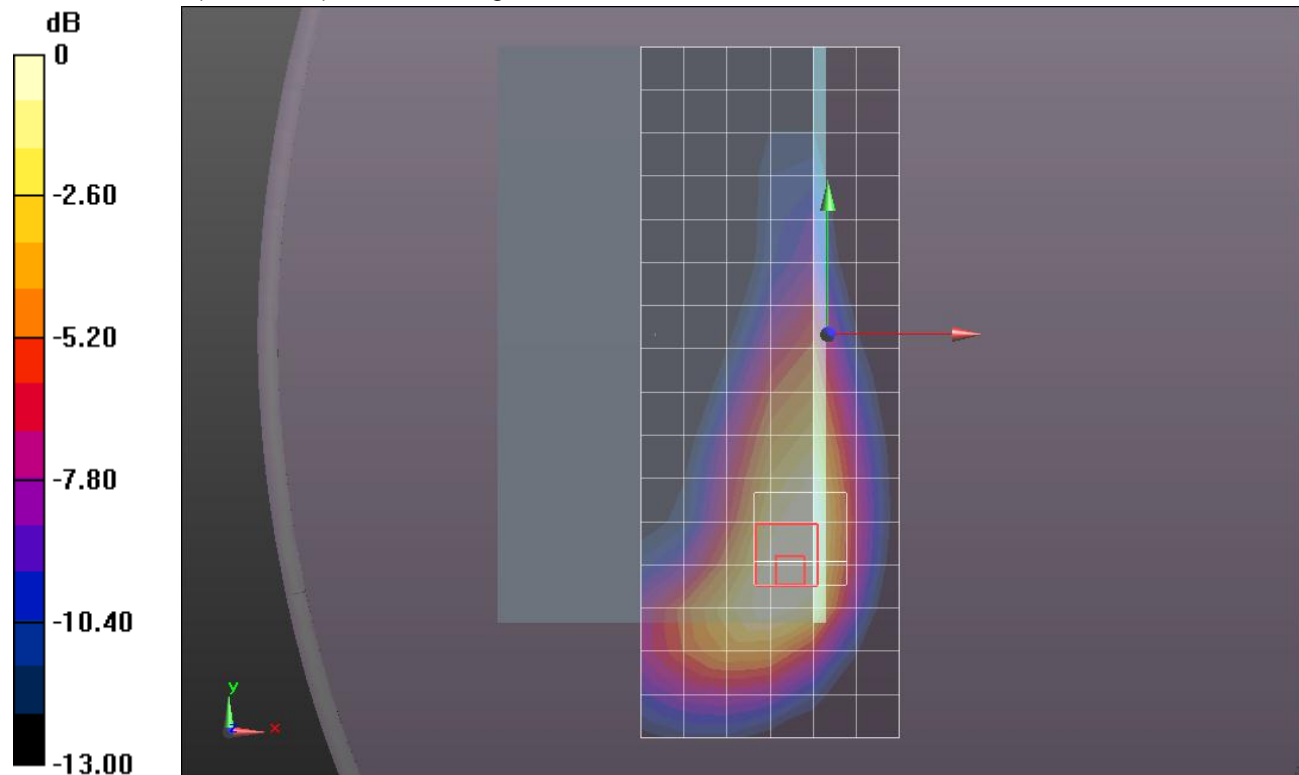

0 dB = 0.480mW/g = -6.38 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/o Pwr back-off (14 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.533 mW/g

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/o Pwr back-off (14 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.969 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.6910

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.269 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.531 mW/g

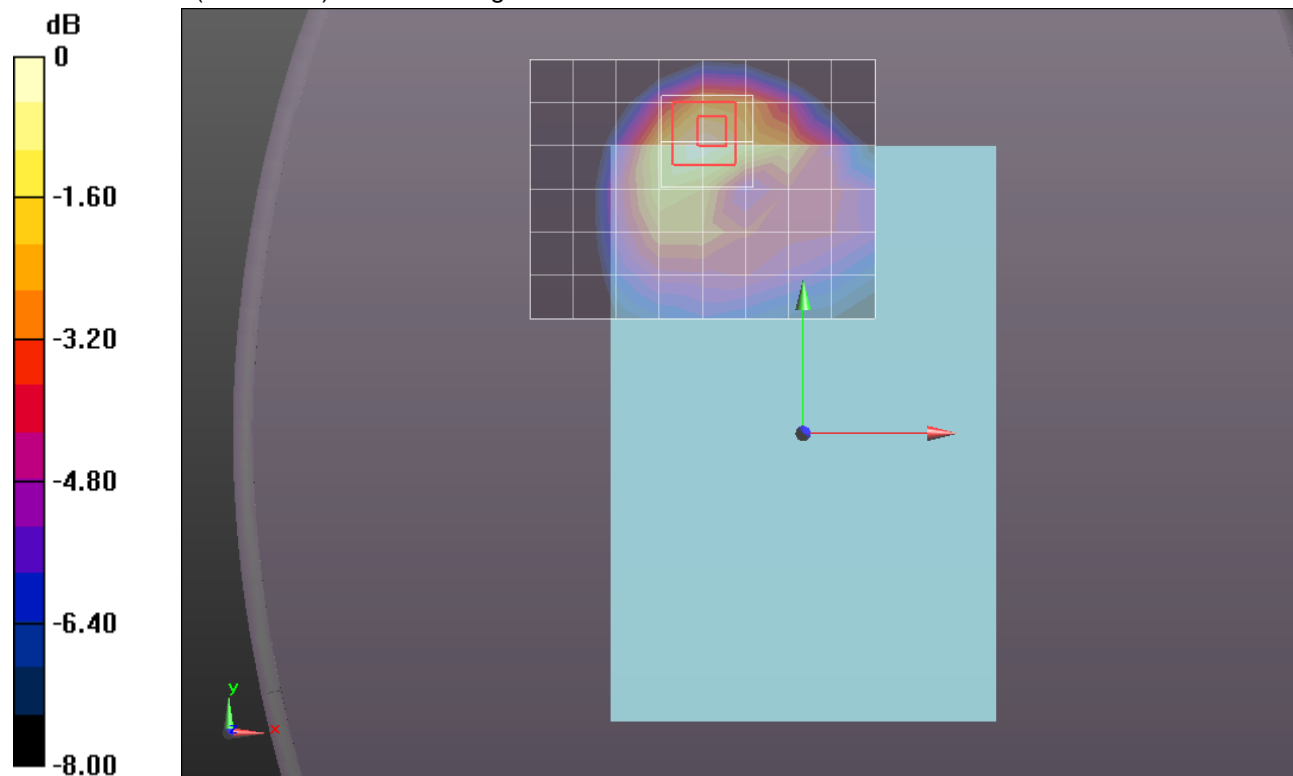

0 dB = 0.530mW/g = -5.51 dB mW/g

CDMA BC0

Frequency: 836.6 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.313$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/o Pwr back-off (14 mm)/Area Scan

(6x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.296 mW/g

Edge 1/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/o Pwr back-off (14 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.237 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.3990

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.188 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.338 mW/g

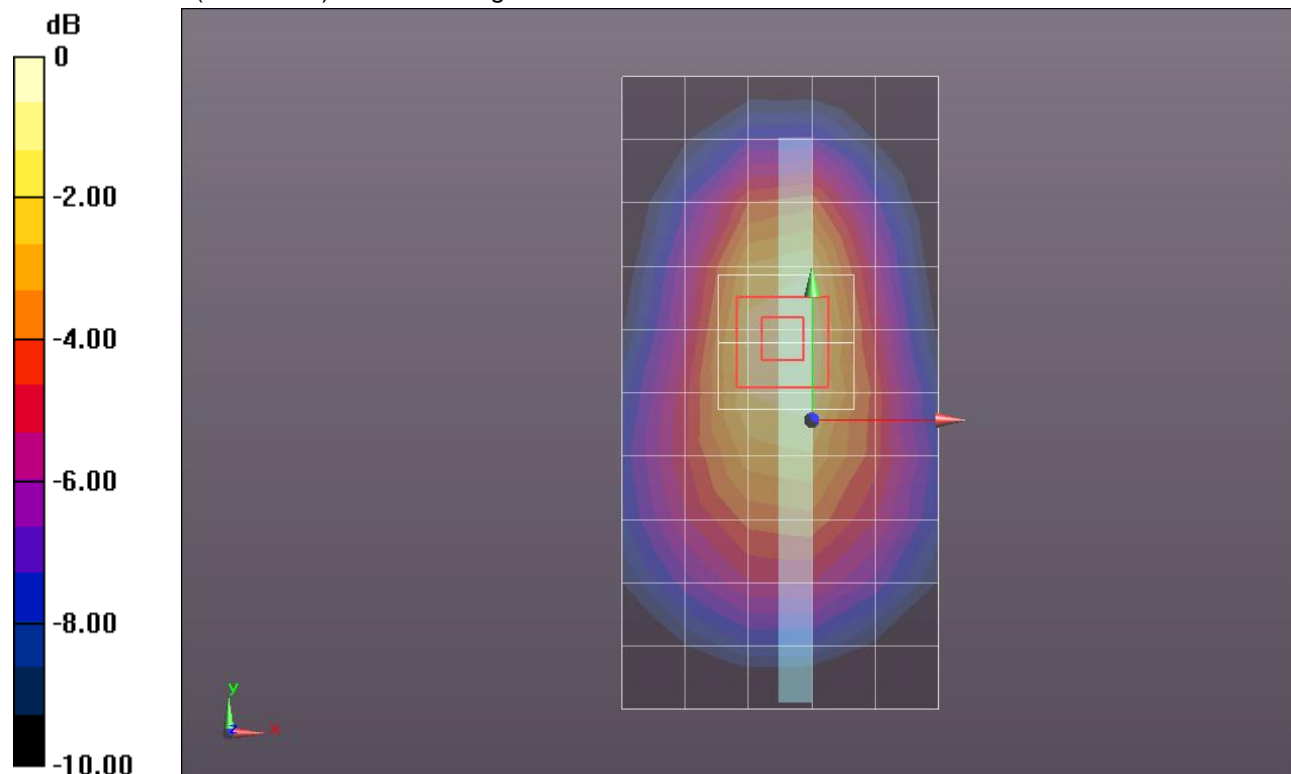

0 dB = 0.340mW/g = -9.37 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 54.43$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 1013 w/ Pwr back-off (Pri.) (0 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.204 mW/g

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 1013 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.446 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.7990

SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.480 mW/g

Maximum value of SAR (measured) = 1.305 mW/g

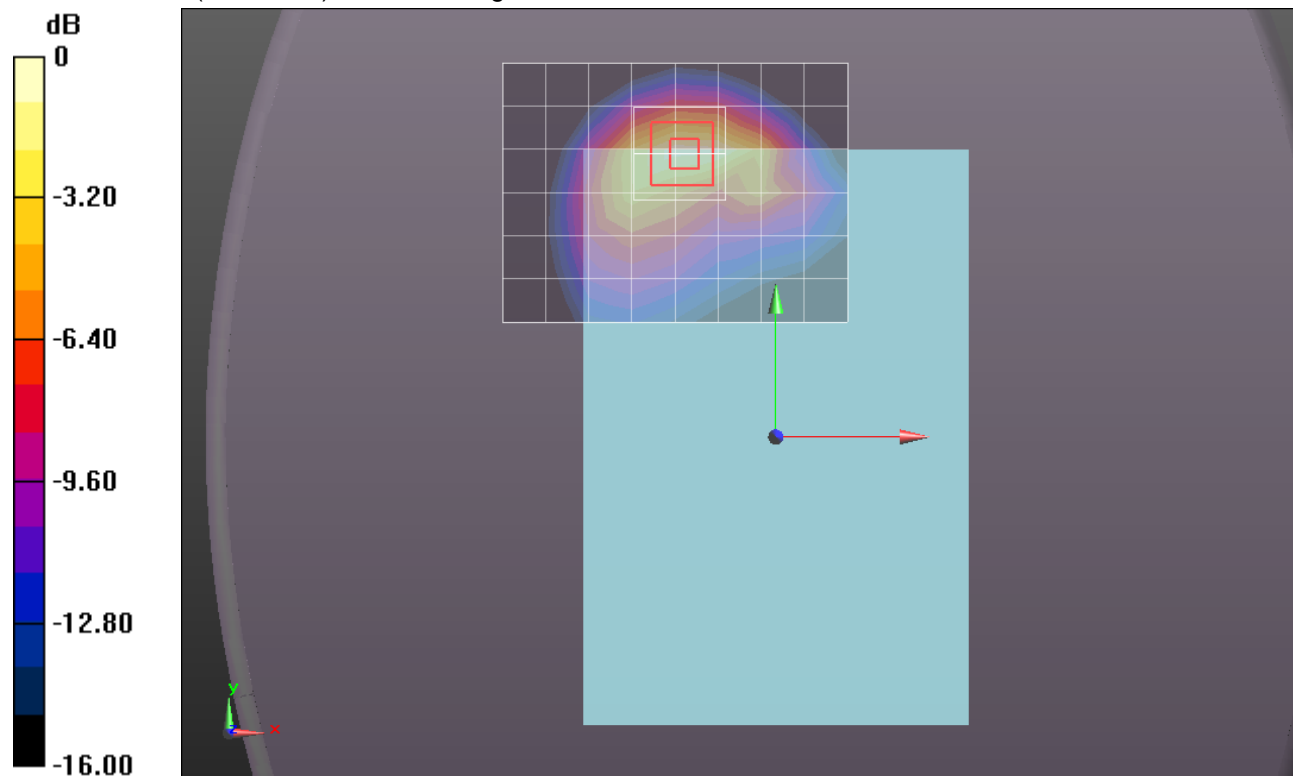

0 dB = 1.300mW/g = 2.28 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.506 mW/g

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 38.821 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.2850

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.603 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.635 mW/g

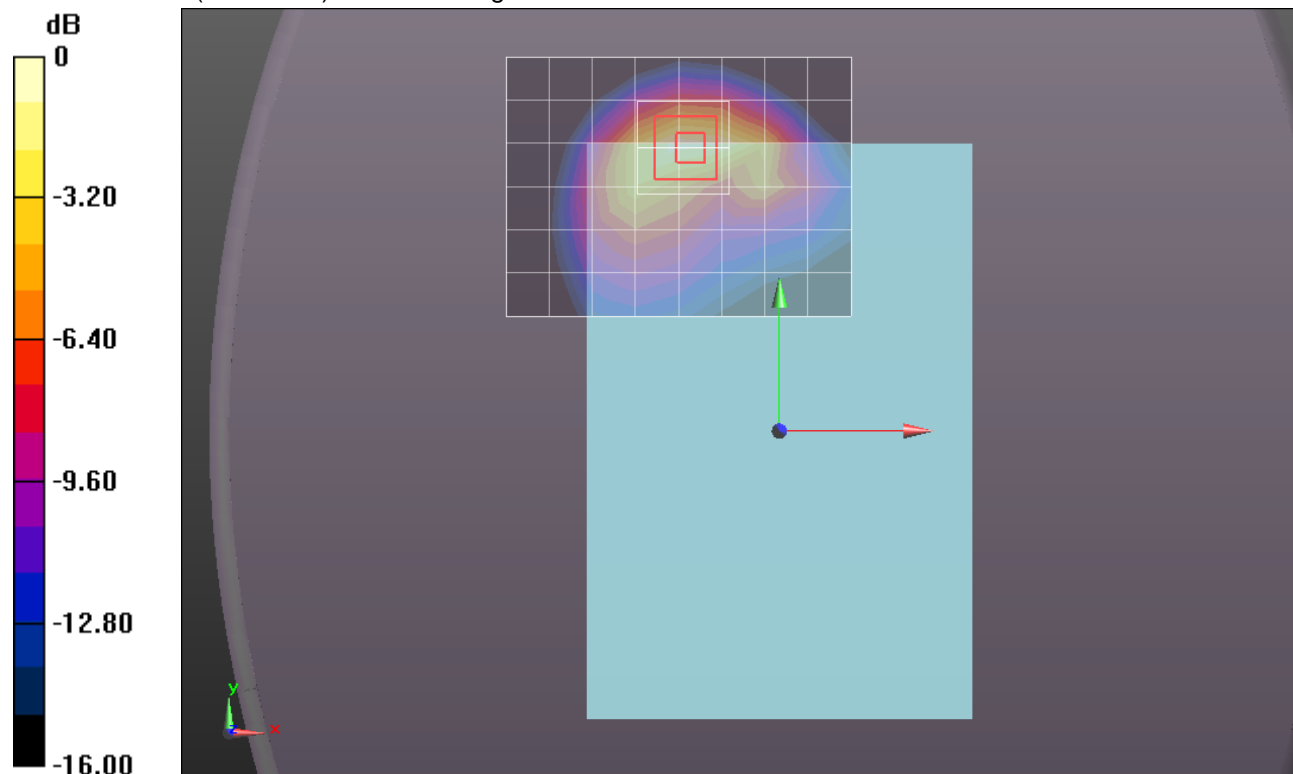

0 dB = 1.630mW/g = 4.24 dB mW/g

CDMA BC0


Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Z Scan

(1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.461 mW/g

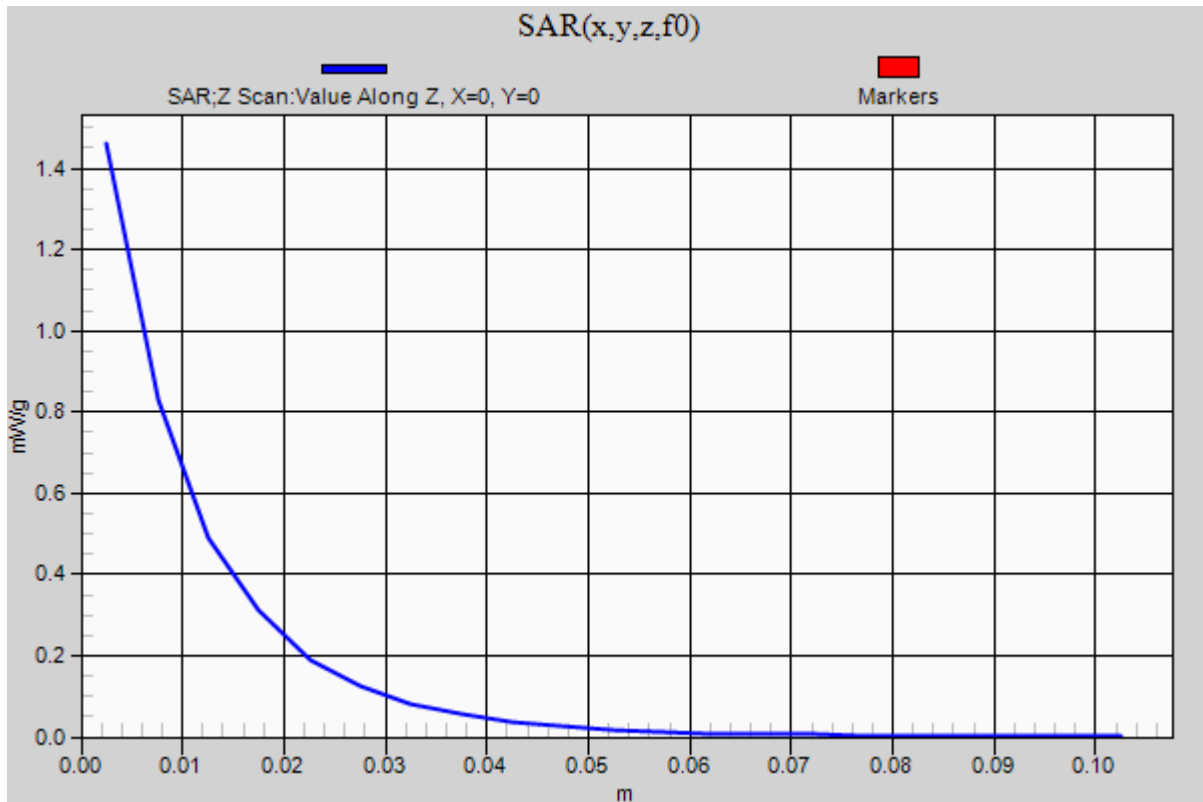

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.018$ mho/m; $\epsilon_r = 54.193$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 777 w/ Pwr back-off (Pri.) (0 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.511 mW/g

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 777 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 38.727 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 2.2870

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.577 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.636 mW/g

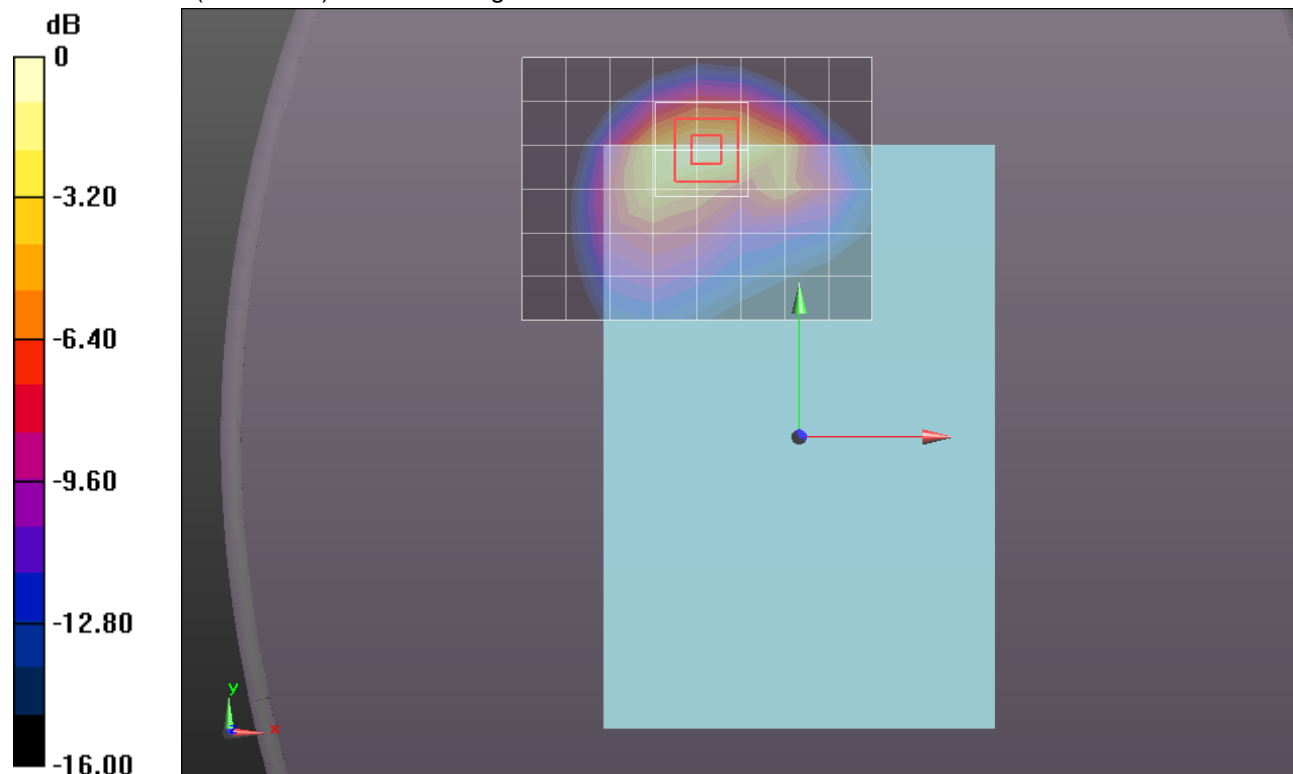

0 dB = 1.640mW/g = 4.30 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Pri) (0 mm)/Area Scan

(6x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.309 mW/g

Edge 1/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Pri) (0 mm)/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.848 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.4210

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.191 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.349 mW/g

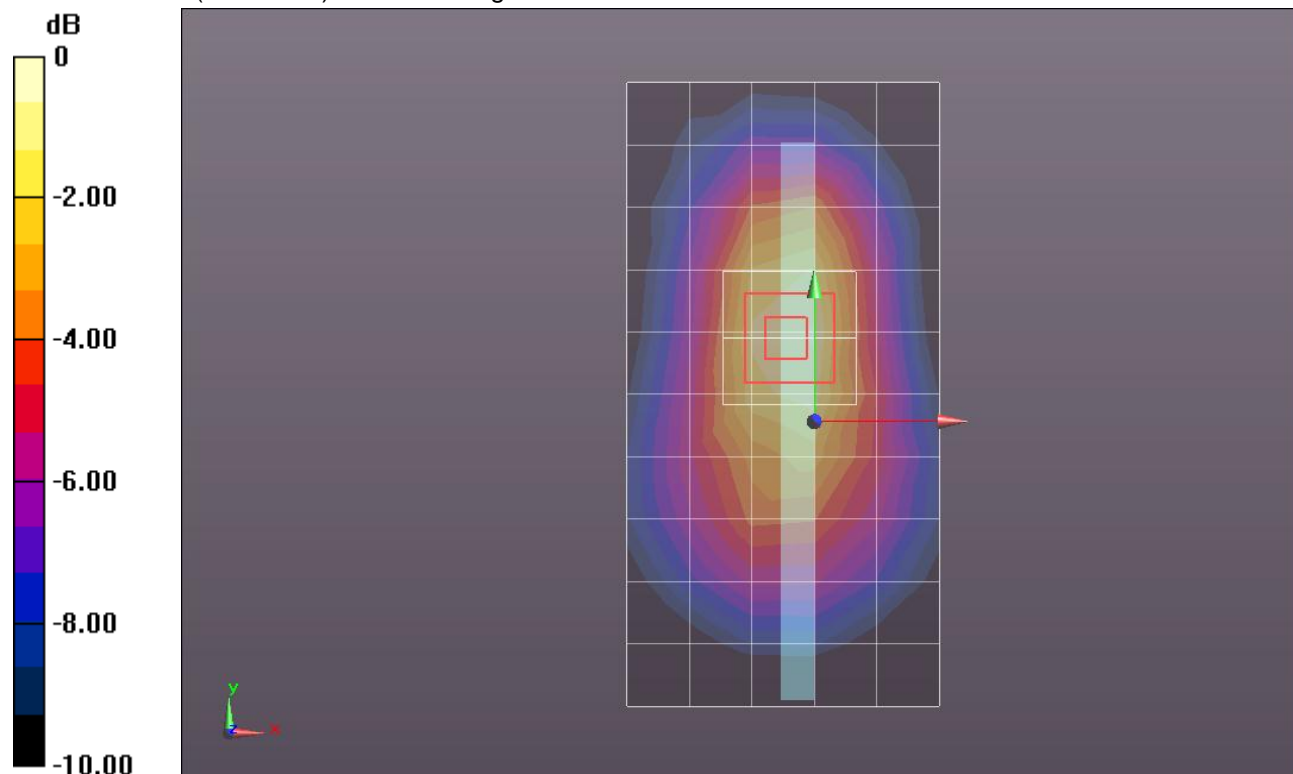

0 dB = 0.350mW/g = -9.12 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 2/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area

Scan (6x17x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.290 mW/g

Edge 2/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.392 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.5020

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.151 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.367 mW/g

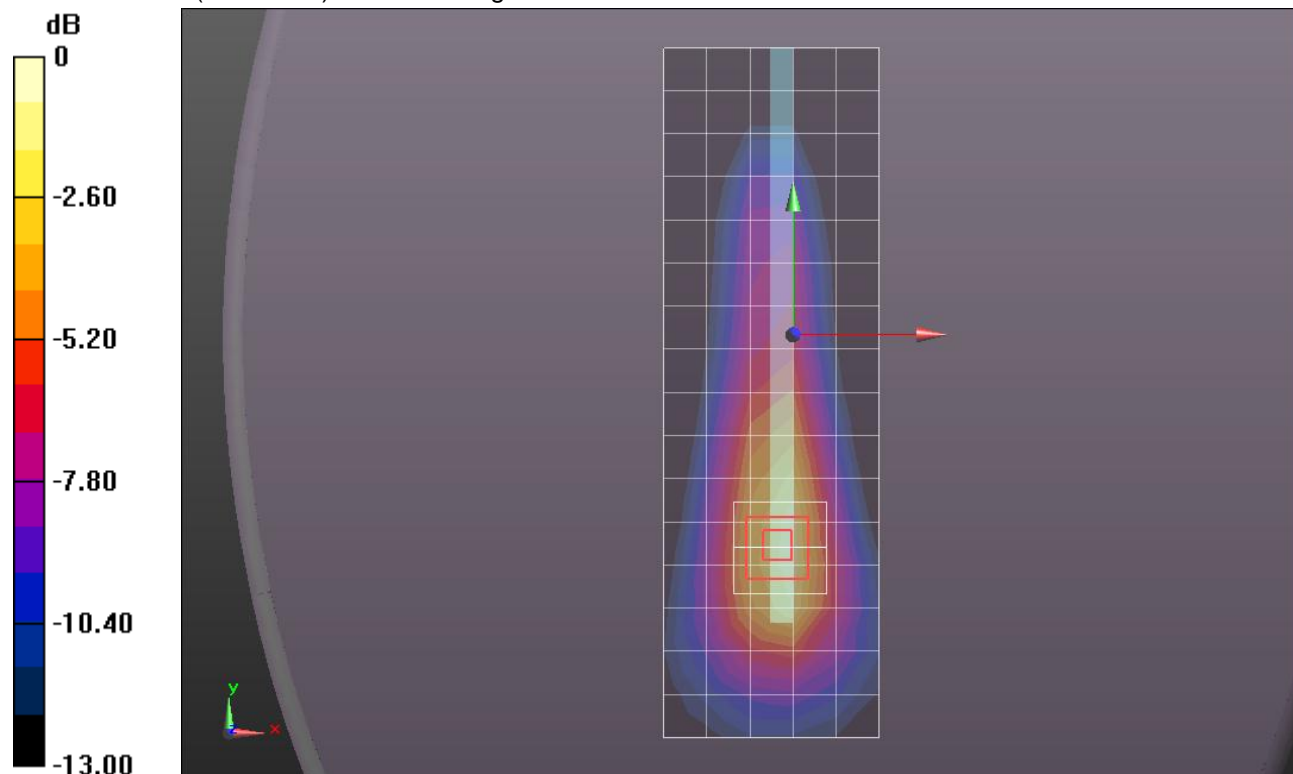

0 dB = 0.370mW/g = -8.64 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1 and Edge 2 Tilt 40 deg/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.288 mW/g

Edge 1 and Edge 2 Tilt 40 deg/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.471 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 0.5500

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.138 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.383 mW/g

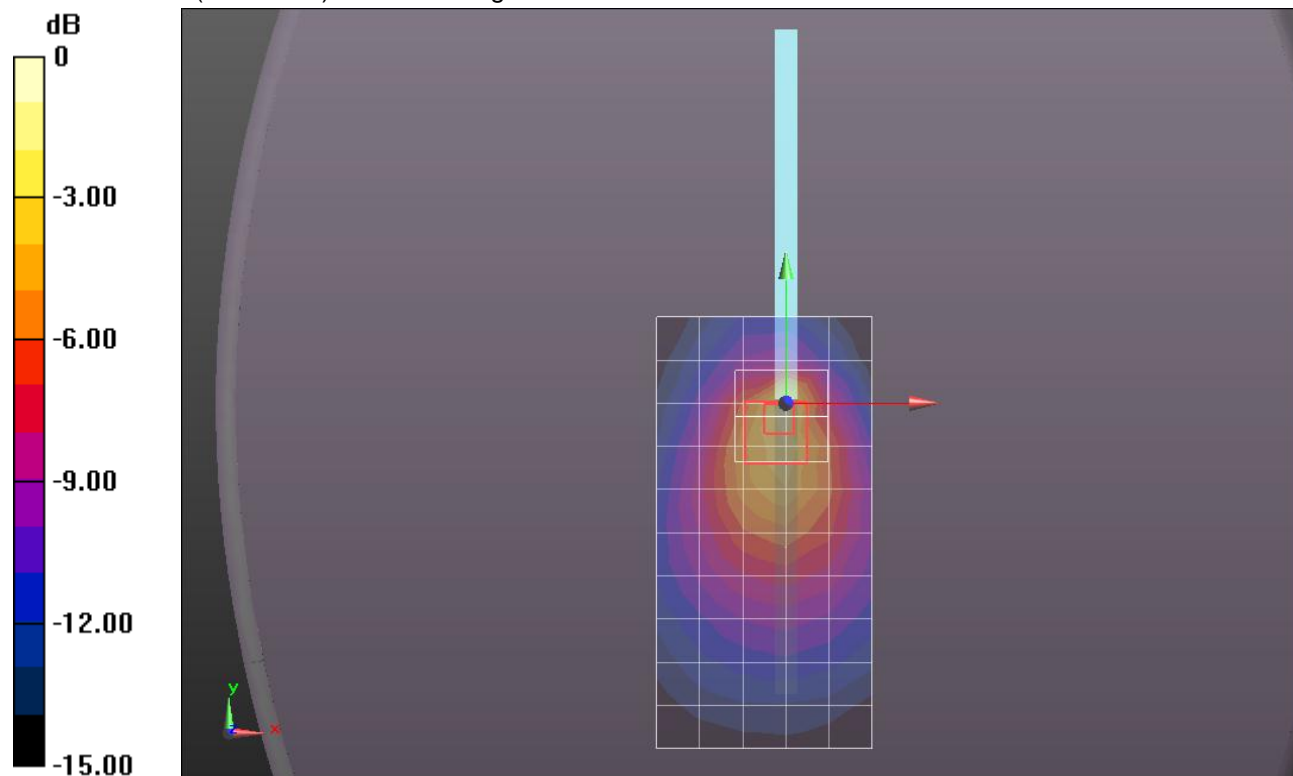

0 dB = 0.380mW/g = -8.40 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 2 Tilt 35 deg/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.408 mW/g

Edge 2 Tilt 35 deg/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Sec.) (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.865 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.5510

SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.241 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.445 mW/g

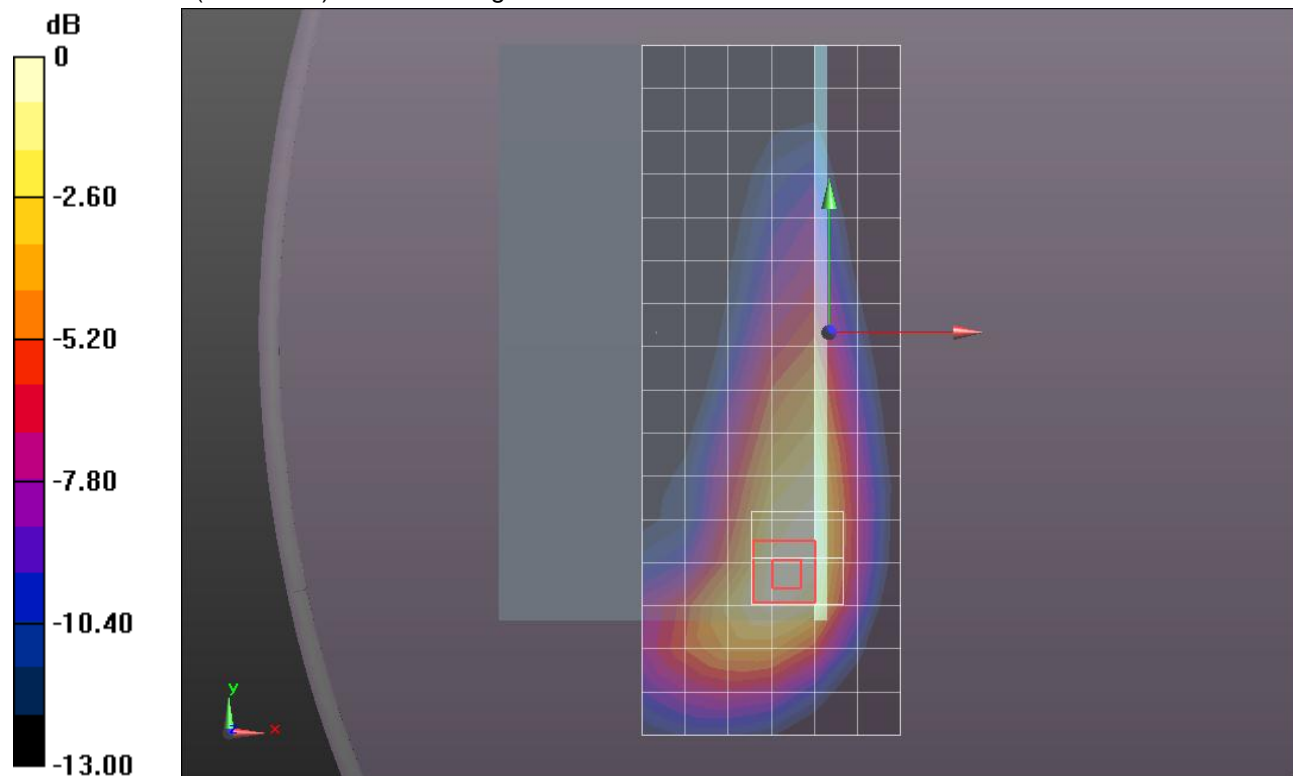

0 dB = 0.450mW/g = -6.94 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/o Pwr back-off (14 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.443 mW/g

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/o Pwr back-off (14 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.576 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.5910

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.236 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.456 mW/g

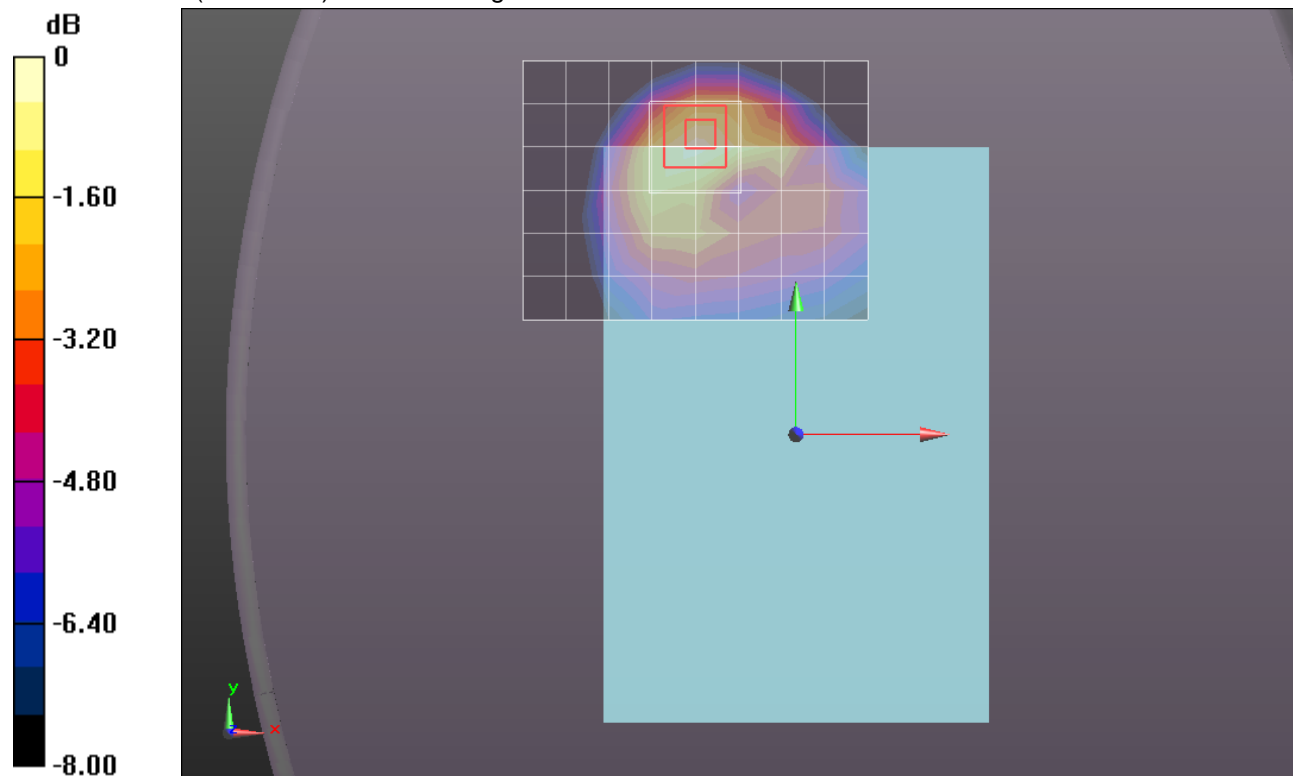

0 dB = 0.460mW/g = -6.74 dB mW/g

CDMA BC0

Frequency: 836.6 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.313$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/o Pwr back-off (14 mm)/Area Scan

(6x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.249 mW/g

Edge 1/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/o Pwr back-off (14 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.831 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.3300

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.159 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.280 mW/g

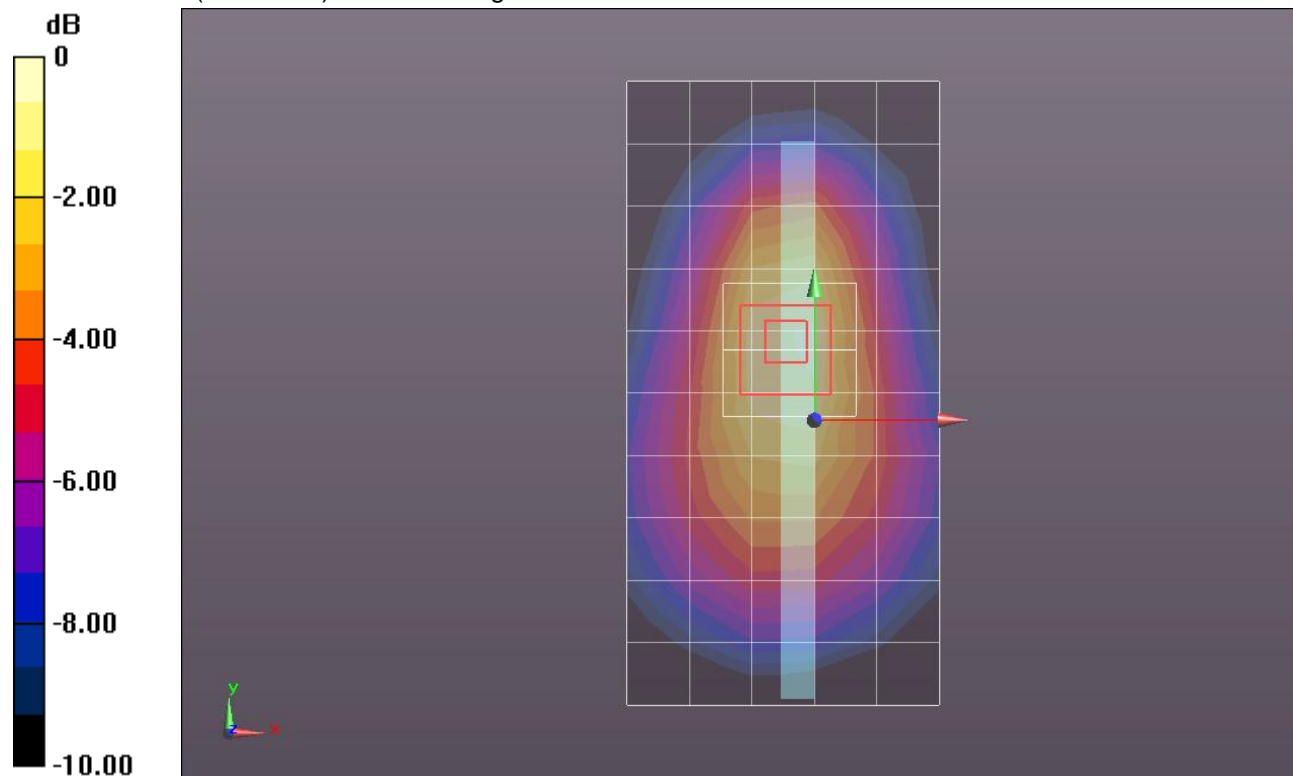

0 dB = 0.280mW/g = -11.06 dB mW/g