



**FCC OET BULLETIN 65 SUPPLEMENT C 01-01
IEEE Std 1528-2003 & IEEE 1528a-2005**

SAR EVALUATION REPORT

For

**Tablet with cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA1xRTT/ EV-DO
Rev 0, A, B / LTE radio, IEEE 802.11a/b/g/n radio and Bluetooth radio**

**Model: A1455
FCC ID: BCGA1455**

**Report Number: 12U14526-9A
Issue Date: 10/19/2012**

Prepared for
**APPLE INC.
1 INFINITE LOOP
CUPERTINO, CA 95014-2084**

Prepared by
**UL CCS
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	10/3/2012	Initial Issue	--
A	10/19/2012	<ol style="list-style-type: none">1. Sec. 12.2: Added note regarding dipole calibration date.2. Re-generated three 5 GHz WiFi plots (pages 4, 5 and 12) with corrected probe calibration file.3. Updated 5 GHz WiFi SAR values in section 13.12, 15.4 and 15.7 based on the item 1 above.	Sunny Shih

Table of Contents

1. Attestation of Test Results..... 7

2. Test Methodology 8

3. Facilities and Accreditation 8

4. Calibration and Uncertainty 9

 4.1. *Measuring Instrument Calibration 9*

 4.2. *Measurement Uncertainty..... 10*

5. Measurement System Description and Setup..... 11

6. SAR Measurement Procedure..... 12

 6.1. *Normal SAR Measurement Procedure..... 12*

 6.2. *Volume Scan Procedures 14*

7. Summary of Highest 1g SAR Results..... 15

8. Device Under Test..... 16

 8.1. *Band and Air Interfaces 16*

 8.2. *Hotspot (Wireless router) Function..... 16*

 8.3. *Simultaneous Transmission..... 17*

 8.3.1. *Body Exposure Condition 17*

 8.3.2. *Wireless Router (hotspot) Exposure Condition 18*

 8.4. *941225 D05 SAR for LTE Devices v02 (Draft)..... 19*

 8.5. *Power Reduction by Proximity Sensing 22*

 8.5.1. *Proximity Sensor Detection Area 22*

 8.5.2. *Coverage at the Corner of the DUT 27*

 8.5.3. *SAR Test Configurations 35*

 8.5.4. *Special Development Software 35*

 8.6. *Power Reduction per Air-interface 36*

 8.6.1. *GSM Bands 36*

 8.6.2. *WCDMA Bands..... 37*

 8.6.3. *CDMA Bands..... 40*

 8.6.4. *LTE Bands..... 42*

9. Exposure Conditions..... 48

 9.1. *Body..... 48*

10. RF Output Power Measurement 49

 10.1. *GSM850..... 49*

10.2.	GSM1900.....	50
10.3.	W-CDMA Band V	51
10.4.	W-CDMA Band II.....	57
10.5.	CDMA BC0.....	63
10.6.	CDMA BC1.....	68
10.7.	CDMA BC10.....	71
10.8.	LTE Band 5.....	74
10.9.	LTE Band 13.....	79
10.10.	LTE Band 25.....	82
10.11.	WiFi (2.4 GHz Band)	89
10.12.	WiFi (5 GHz Bands)	90
10.13.	Bluetooth.....	92
11.	Tissue Dielectric Properties	93
11.1.	Composition of Ingredients for the Tissue Material Used in the SAR Tests	94
11.2.	Tissue Dielectric Parameter Check Results.....	95
12.	System Performance Check	107
12.1.	System Performance Check Measurement Conditions.....	107
12.2.	Reference SAR Values for System Performance Check.....	107
12.3.	System Performance Check Results	108
13.	SAR Test Results	111
13.1.	GSM850.....	111
13.2.	GSM1900.....	112
13.3.	W-CDMA Band V	113
13.4.	W-CDMA Band II.....	114
13.5.	CDMA BC0.....	115
13.6.	CDMA BC1.....	117
13.7.	CDMA BC10.....	118
13.8.	LTE Band 5 (10 MHz Bandwidth)	119
13.9.	LTE Band 13 (10 MHz Bandwidth)	121
13.10.	LTE Band 25 (20MHz Bandwidth)	123
13.11.	Wi-Fi (2.4 GHz Band)	125
13.12.	Wi-Fi (5 GHz Bands)	126
13.13.	Bluetooth.....	128
14.	Summary of Highest SAR Values.....	129
14.1.	Scaled SAR Values to the Maximum Target Output Power	130

14.2. SAR Plots (from Summary of Highest SAR Values) 131

15. Simultaneous Transmission SAR Analysis 174

15.1. Sum of the SAR for GSM, W-CDMA, CDMA, LTE and WiFi 2.4 GHz..... 174

15.2. Sum of the SAR for GSM, W-CDMA, CDMA, LTE and Bluetooth..... 177

15.3. Sum of the SAR for GSM, W-CDMA, CDMA, LTE, WiFi 5.2 GHz..... 180

15.4. Sum of the SAR for GSM, W-CDMA, CDMA, LTE, WiFi 5.3 GHz..... 183

15.5. Sum of the SAR for GSM, W-CDMA, CDMA, LTE, WiFi 5.5 GHz..... 186

15.6. Sum of the SAR for GSM, W-CDMA, CDMA, LTE, WiFi 5.8 GHz..... 189

15.7. Sum of the SAR for WiFi 5 GHz and Bluetooth..... 192

16. Appendixes 195

16.1. System Performance Check Plots 195

16.2. SAR Test Plots for GSM850..... 195

16.3. SAR Test Plots for GSM1900..... 195

16.4. SAR Test Plots for W-CDMA Band V 195

16.5. SAR Test Plots for W-CDMA Band II..... 195

16.6. SAR Test Plots for CDMA BC0..... 195

16.7. SAR Test Plots for CDMA BC1..... 195

16.8. SAR Test Plots for CDMA BC10..... 195

16.9. SAR Test Plots for LTE Band 5 195

16.10. SAR Test Plots for LTE Band 13 195

16.11. SAR Test Plots for LTE Band 25 195

16.12. SAR Test Plots for WiFi 2.4 GHz Band..... 195

16.13. SAR Test Plots for WiFi 5 GHz Bands..... 195

16.14. SAR Test Plots for Bluetooth..... 195

16.15. Calibration Certificate for E-Field Probe EX3DV4 - SN 3686..... 195

16.16. Calibration Certificate for E-Field Probe EX3DV4 - SN 3772 195

16.17. Calibration Certificate for E-Field Probe EX3DV4 - SN 3773..... 195

16.18. Calibration Certificate for D750V3 - SN 1024 195

16.19. Calibration Certificate for D835V2 - SN 4d002 195

16.20. Calibration Certificate for D835V2 - SN 4d117 195

16.21. Calibration Certificate for D1900V2 - SN 5d140 195

16.22. Calibration Certificate for D2450V2 - SN 748 195



16.23. Calibration Certificate for D5GHzV2 - SN 1075..... 195

16.24. Calibration Certificate for D5GHzV2 - SN 1003..... 195

17. External Photos 196

18. Antenna Locations & Separation Distances.....	197
19. Setup Photos	198

1. Attestation of Test Results

Applicant	Apple Inc.	
DUT description	Tablet with cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA1xRTT/ EV-DO Rev 0, A, B / LTE radio, IEEE 802.11a/b/g/n radio and Bluetooth radio	
Model	A1455	
Test device is	An identical prototype	
Device category	Portable	
Exposure category	General Population/Uncontrolled Exposure	
Highest 1g SAR	Refer to Sec. 7.	
Date tested	7/31/2012 – 9/19/2012	
Applicable Standards		Test Results
FCC OET Bulletin 65 Supplement C 01-01, IEEE Std 1528-2003 & IEEE 1528a-2005		Pass
<p>UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>		
Approved & Released For UL CCS By:	Tested By:	
		
Sunny Shih Engineering Leader UL CCS	Devin Chang SAR Engineer UL CCS	

2. Test Methodology

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C Edition 01-01, IEEE Std 1528-2003 & IEEE 1528a-2005 and the following KDB Procedures:

- 447498 D01 Mobile Portable RF Exposure v04
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 Guidance for 3GPP R6 and R7 HSPA v02v01
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D05 SAR for LTE Devices v02 **(Draft)**
- 248227 D01 SAR Meas for 802 11abg v01r02
- 616217 D04 SAR for laptop and tablets v01 **(Draft)**
- KDB Inquiry: Tracking Number 416104 for Proximity Sensor discussion
- KDB Inquiry: Tracking Number 583922 for EVDO Rev.B discussion

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
S-Parameter Network Analyzer	Agilent	8753ES	MY40001647	6	27	2013
Dielectronic Probe kit	HP	85070C	2569	N/A		
ENA Series Network Analyzer	Agilent	E5071B	MY42100131	2	11	2013
Dielectronic Probe kit	HP	85070E	594	N/A		
Synthesized Signal Generator	HP	8665B	3438A00633	2	22	2013
Power Meter	HP	438A	3513U04320	9	17	2013
Power Sensor A	HP	8481A	2237A31744	8	17	2013
Power Sensor B	HP	8481A	3318A95392	8	17	2013
Amplifier	MITEQ	4D00400600-50-30P	1622052	N/A		
Directional coupler	Werlatone	C8060-102	2149	N/A		
Synthesized Signal Generator	HP	8665B	3744A01084	5	3	2013
Power Meter	HP	438A	2822A05684	10	7	2013
Power Sensor A	HP	8481A	2702A66876	8	1	2013
Power Sensor B	HP	8482A	2349A08568	4	14	2013
Amplifier	MITEQ	4D00400600-50-30P	1620606	N/A		
Directional coupler	Werlatone	C8060-102	2141	N/A		
Base Station Simulator	R & S	CMU200	106301	6	6	2013
Base Station Simulator	R & S	CMU200	118339	5	20	2013
Base Station Simulator	R & S	CMW500	104245	12	14	2012
Base Station Simulator	R & S	CMW500	124593	7	1	2013
Base Station Simulator	Agilent	8960	GB42361452	4	4	2013
Thermometer	ERTCO	639-1S	8350	7	30	2013
E-Field Probe	SPEAG	EX3DV4	3686	2	16	2013
E-Field Probe	SPEAG	EX3DV4	3772	2	16	2013
E-Field Probe	SPEAG	EX3DV4	3773	3	14	2013
Data Acquisition Electronics	SPEAG	DAE4	1239	6	6	2013
Data Acquisition Electronics	SPEAG	DAE4	1258	3	8	2013
Data Acquisition Electronics	SPEAG	DAE4	1259	2	13	2013
System Validation Dipole	SPEAG	D750V3	1024	4	4	2013
System Validation Dipole	SPEAG	D835V2	4d002	3	6	2013
System Validation Dipole	SPEAG	D835V2	4d117	4	10	2013
System Validation Dipole	SPEAG	D1900V2	5d140	4	18	2013
System Validation Dipole	SPEAG	D2450V2	748	2	7	2013
System Validation Dipole	SPEAG	D5GHzV2	1075	2	14	2013
System Validation Dipole	SPEAG	D5GHzV2	1003	8	23	2012
Power Meter	R & S	NRP	100673	5	5	2013
Power Sensor	R & S	NRP - Z23	100168	5	5	2013
Power Meter	Agilent	N1912A	MY52310061	7	5	2013
Power Sensor Ch A	Agilent	N1921A	MY52260009	7	5	2013
Power Sensor Ch B	Agilent	N1921A	MY52270022	7	21	2013
Power Meter	Agilent	N1912A	MY50001018	8	10	2013
Power Sensor Ch A	Agilent	N1921A	MY52020011	1	17	2013
Power Sensor Ch B	Agilent	N1921A	MY52200012	7	24	2013

4.2. Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram					
Component	Error, %	Distribution	Divisor	Sensitivity	U (Xi), %
Measurement System					
Probe Calibration (k=1)	6.00	Normal	1	1	6.00
Axial Isotropy	1.15	Rectangular	1.732	0.7071	0.47
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7071	0.94
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Conditions - Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Conditions - Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner Mechanical Tolerance	0.40	Rectangular	1.732	1	0.23
Probe Positioning with respect to Phantom	2.90	Rectangular	1.732	1	1.67
Extrapolation, Interpolation and Integration	1.00	Rectangular	1.732	1	0.58
Test Sample Related					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder Uncertainty	3.60	Normal	1	1	3.60
Output Power Variation - SAR Drift	5.00	Rectangular	1.732	1	2.89
Phantom and Tissue Parameters					
Phantom Uncertainty (shape and thickness)	4.00	Rectangular	1.732	1	2.31
Liquid Conductivity - deviation from target	5.00	Rectangular	1.732	0.64	1.85
Liquid Conductivity - measurement	-4.18	Normal	1	0.64	-2.68
Liquid Permittivity - deviation from target	5.00	Rectangular	1.732	0.6	1.73
Liquid Permittivity - measurement uncertainty	-4.60	Normal	1	0.6	-2.76
Combined Standard Uncertainty Uc(y) =					10.47
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				20.94 %	
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				1.65 dB	
Measurement uncertainty for 3 to 6 GHz averaged over 1 gram					
Component	Error, %	Distribution	Divisor	Sensitivity	U (Xi), %
Measurement System					
Probe Calibration (k=1)	6.55	Normal	1	1	6.55
Axial Isotropy	1.15	Rectangular	1.732	0.7071	0.47
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7071	0.94
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	1.00	Normal	1	1	1.00
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Conditions - Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Conditions - Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner Mechanical Tolerance	0.40	Rectangular	1.732	1	0.23
Probe Positioning with respect to Phantom	2.90	Rectangular	1.732	1	1.67
Extrapolation, Interpolation and Integration	3.90	Rectangular	1.732	1	2.25
Test Sample Related					
Test Sample Positioning	1.10	Normal	1	1	1.10
Device Holder Uncertainty	3.60	Normal	1	1	3.60
Output Power Variation - SAR Drift	5.00	Rectangular	1.732	1	2.89
Phantom and Tissue Parameters					
Phantom Uncertainty (shape and thickness)	4.00	Rectangular	1.732	1	2.31
Liquid Conductivity - deviation from target	5.00	Rectangular	1.732	0.64	1.85
Liquid Conductivity - measurement	-4.75	Normal	1	0.64	-3.04
Liquid Permittivity - deviation from target	10.00	Rectangular	1.732	0.6	3.46
Liquid Permittivity - measurement uncertainty	-3.92	Normal	1	0.6	-2.35
Combined Standard Uncertainty Uc(y), %:					11.14
Expanded Uncertainty U, Coverage Factor = 1.96, > 95 % Confidence =				21.82 %	
Expanded Uncertainty U, Coverage Factor = 1.96, > 95 % Confidence =				1.71 dB	

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

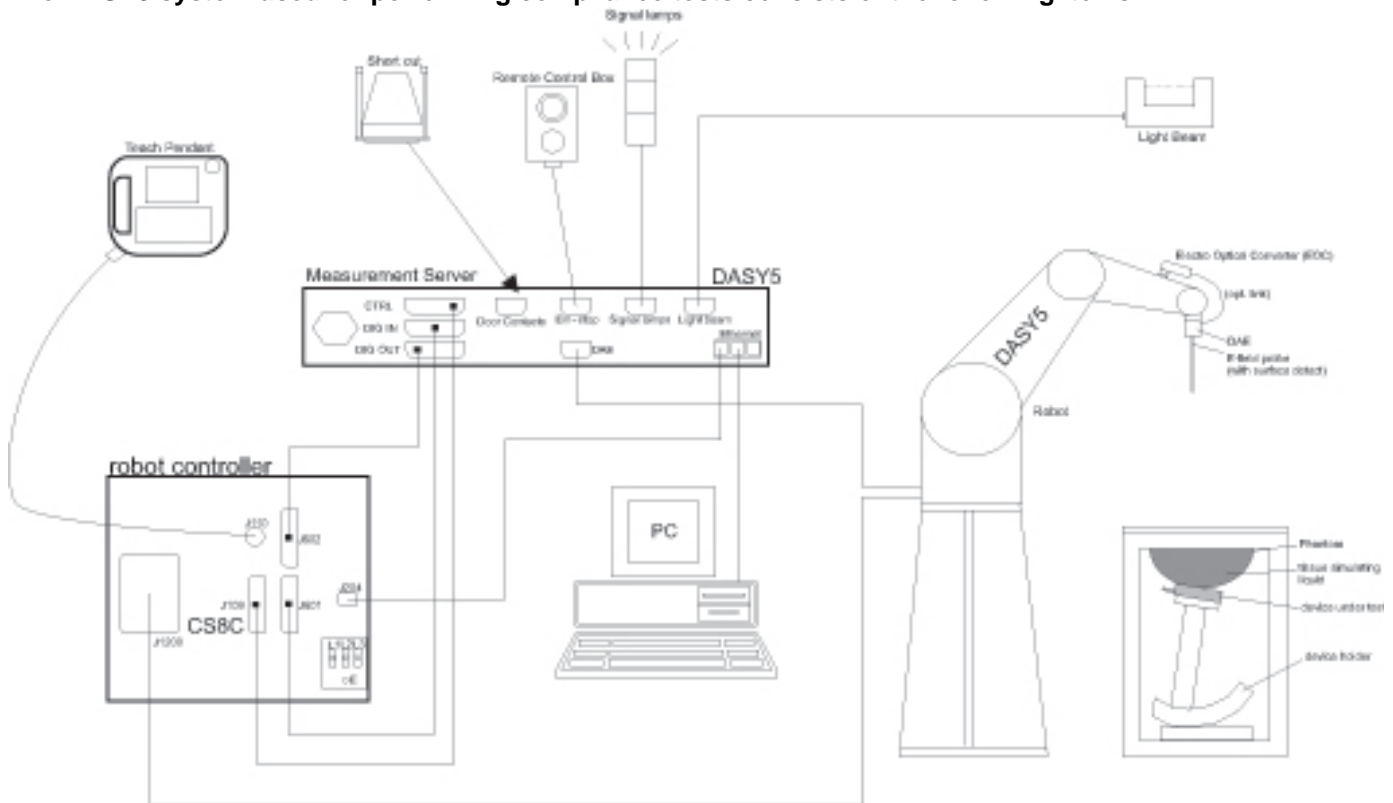

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01 (Draft)

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01 (Draft)

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Summary of Highest 1g SAR Results

Worst Case SAR data for each Frequency Band

FCC Rule Parts	Freq. Range	Highest 1-g SAR	Limit
22	824-849 MHz	1.19 W/kg (Body Rear w/ 0 mm distance)	1.6 W/kg
24	1850-1910 MHz	1.19 W/kg (Body Rear w/ 0 mm distance)	
90	817.9-823.1 MHz	1.17 W/kg (Body Rear w/ 0 mm distance)	
27 (LTE Band 5)	824-849 MHz	1.17 W/kg (Body Rear w/ 0 mm distance)	
27 (LTE Band 13)	777-787 MHz	1.18 W/kg (Body Rear w/ 0 mm distance)	
27 (LTE Band 25)	1850-1915 MHz	1.17 W/kg (Body Rear w/ 0 mm distance)	
15.247 (WiFi)	2412-2462 MHz	1.07 W/kg (Body Edge 3 w/ 0 mm distance)	
15.247 (BT)	2402-2480 MHz	0.395 W/kg (Body Edge 3 w/ 0 mm distance)	
15.407	5150-5250 MHz	0.969 W/kg (Body Edge 3 w/ 0 mm distance)	
	5250-5350 MHz	1.14 W/kg (Body Edge 3 w/ 0 mm distance)	
	5500-5700 MHz	1.18 W/kg (Body Edge 3 w/ 0 mm distance)	
15.247	5725-5850 MHz	1.17 W/kg (Body Edge 3 w/ 0 mm distance)	
Simultaneous transmission condition		1.575 W/kg (refer to Section 15.7) (The highest SAR across exposure conditions)	

Notes:

- Edge 1 = Top Edge
- Edge 2 = Right Edge
- Edge 3 = Bottom Edge
- Edge 4 = Left Edge
- Edge 1 and Edge 2 Tilt 40 deg = Top-Edge/Right Corner Tilt 40 deg
- Edge 2 Tile 35 deg = Right Edge Tile 35 deg

8. Device Under Test

Model A1455, is a tablet with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA1xRTT/ EV-DO Rev 0, A, B / LTE radio, IEEE 802.11a/b/g/n radio and Bluetooth radio.

Exposure conditions	Body Exposure with all surfaces and edges. Refer to Section 9 for detailed.
---------------------	---

8.1. Band and Air Interfaces

Tx Frequencies	<ul style="list-style-type: none"> • GSM850: 824 - 849 MHz • GSM1900: 1850 - 1910 MHz • W-CDMA Band II: 1850 - 1910 MHz • W-CDMA Band V: 824 - 849 MHz • CDMA BC 0: 824 - 849 MHz • CDMA BC 1: 1850 - 1910 MHz • CDMA BC 10: 817.9 – 823.1 MHz • LTE Band 5: 824 - 849 MHz • LTE Band 13: 777 - 787 MHz • LTE Band 25: 1850 - 1915 MHz • 802.11a/b/g/n: 2412 - 2462 MHz 5180 – 5825 MHz • Bluetooth: 2402 - 2480 MHz
Mode	<ul style="list-style-type: none"> ▪ GSM/GPRS/EGPRS ▪ UMTS Rel 99 ▪ HSDPA (Rel 7, CAT 14) ▪ HSUPA (Rel 6, CAT 6) ▪ DC-HSDPA (Rel 8, CAT 24) ▪ HSPA+ (Rel 6, CAT 6) ▪ CDMA 1xRTT ▪ EVDO Rev. 0, Rev. A, Rev. B (Rev B in BC0 for 16QAM only) ▪ 802.11a/b/g/n HT20/HT40(a mode only) • Bluetooth 4.0 LE

8.2. Hotspot (Wireless router) Function

The device is capable of personal hotspot mode. The hotspot mode can be enabled by the users by the following this sequence of soft-keys; Settings > General > Network > Enable Personal Hotspot.

WiFi Hotspot mode permits the device to share its cellular data connection with other 2.4 GHz WiFi-enabled devices (channels 1 - 11). WiFi Hotspot mode is not supported in 5.0 GHz WiFi band.

8.3. Simultaneous Transmission

8.3.1. Body Exposure Condition

A1455 Cellular + Wi-Fi, Cellular+ BT Simultaneous Transmission Configurations

User usage	SAR Test distance	Mode	Mode of Operation	Band	LTE	CDMA Data 1xRTT, EV-DO	GPRS/EGPRS	WCDMA	DC-HSDPA / HSPA+	Wi-Fi 5GHz	Wi-Fi 2.4GHz	BT 2.4GHz	
Body SAR	0 cm	Cellular + 2.4GHz WiFi	CDMA 1xRTT, EV-DO	820	No	Yes	No	No	No	No	Yes	No	
			CDMA 1xRTT, EV-DO	835	No	Yes	No	No	No	No		No	No
			CDMA 1xRTT, EV-DO	1900	No	Yes	No	No	No	No		No	No
			GPRS/ EGPRS	850	No	No	Yes	No	No	No		No	No
			GPRS/ EGPRS	1900	No	No	Yes	No	No	No		No	No
			WCDMA	850	No	No	No	Yes	No	No		No	No
			WCDMA	1900	No	No	No	Yes	No	No		No	No
			DC-HSDPA	835	No	No	No	No	Yes	No		No	No
			DC-HSDPA	1900	No	No	No	No	Yes	No		No	No
			HSPA+	835	No	No	No	No	Yes	No		No	No
			HSPA+	1900	No	No	No	No	Yes	No		No	No
			LTE data	782	Yes	No	No	No	No	No		No	No
			LTE data	850	Yes	No	No	No	No	No		No	No
			LTE data	1915	Yes	No	No	No	No	No		No	No
		Cellular+5GHz Wifi / Cellular+BT / 5GHz Wifi+BT	CDMA 1xRTT, EV-DO	820	No	Yes	No	No	No	No	Yes	No	Yes
			CDMA 1xRTT, EV-DO	835	No	Yes	No	No	No	No		No	
			CDMA 1xRTT, EV-DO	1900	No	Yes	No	No	No	No		No	
			GPRS/ EGPRS	850	No	No	Yes	No	No	No		No	
			GPRS/ EGPRS	1900	No	No	Yes	No	No	No		No	
			WCDMA	850	No	No	No	Yes	No	No		No	
			WCDMA	1900	No	No	No	Yes	No	No		No	
			DC-HSDPA	835	No	No	No	No	Yes	No		No	
			DC-HSDPA	1900	No	No	No	No	Yes	No		No	
			HSPA+	835	No	No	No	No	Yes	No		No	
			HSPA+	1900	No	No	No	No	Yes	No		No	
			LTE data	782	Yes	No	No	No	No	No		No	
LTE data	850	Yes	No	No	No	No	No	No					
LTE data	1915	Yes	No	No	No	No	No	No					

8.3.2. Wireless Router (hotspot) Exposure Condition

A1455 Hotspot simultaneous transmission

User usage	SAR Test distance	Mode	Mode of Operation	Band	LTE	CDMA Data 1xRTT, EV-DO	GPRS/ EGPRS	WCDMA	DC-HSDPA / HSPA+	Wi-Fi HOTSPOT 2.4GHz Only)	BT 2.4GHz
Hotspot	0 cm	Cellular + 2.4GHz Wi-Fi	CDMA 1xRTT, EV-DO	820	No	Yes	No	No	No	Yes	No
			CDMA 1xRTT, EV-DO	835	No	Yes	No	No	No		No
			CDMA 1xRTT, EV-DO	1900	No	Yes	No	No	No		No
			GPRS/ EGPRS	850	No	No	Yes	No	No		No
			GPRS/ EGPRS	1900	No	No	Yes	No	No		No
			WCDMA	850	No	No	No	Yes	No		No
			WCDMA	1900	No	No	No	Yes	No		No
			DC-HSDPA	835	No	No	No	No	Yes		No
			DC-HSDPA	1900	No	No	No	No	Yes		No
			HSPA+	835	No	No	No	No	Yes		No
			HSPA+	1900	No	No	No	No	Yes		No
			LTE data	782	Yes	No	No	No	No		No
			LTE data	850	Yes	No	No	No	No		No
			LTE data	1915	Yes	No	No	No	No		No

8.4. 941225 D05 SAR for LTE Devices v02 (Draft)

#	Description	Information						
A	List the frequency range and channel bandwidths used in each LTE band; 1.4, 3, 5, 10, 15, 20 MHz, etc.	Band 5						
		Tx: 824 - 849 MHz Rx: 869 - 894 MHz						
		Band 13						
		Tx: 777 - 787 MHz Rx: 746 - 756 MHz						
		Band 25						
		Tx: 1850 - 1915 MHz Rx: 1930 - 1995 MHz						
		1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz						
B	Identify the high, middle and low (H, M, L) channel numbers and frequencies in each LTE frequency band	Band 5						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
		Low		20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7	
		Mid		20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5	
		High		20600/ 844	20625/ 846.5	20634/ 847.4	20642/ 848.2	
		Band 13	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
		Low			23205/ 779.5			
		Mid		23230/ 782	23230/ 782			
		High			23255/ 784.5			
		Band 25	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
		Low	26140/ 1860	26115/ 1857.5	26090/ 1855	26065/ 1852.5	26055/ 1851.5	26047/ 1850.7
		Mid	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5
		High	26590/ 1905	26615/ 1907.5	26640/ 1910	26665/ 1912.5	26674/ 1913.4	26682/ 1914.2
		C	Descriptions of the LTE transmitter and antenna implementation, and identify if the transmitter operates independently of the other wireless transmitters in the device; i.e., whether the LTE hardware, components and/or antenna(s) are shared with other transmitters.	A single antenna is used for LTE and other wireless modes (CDMA/GPRS/EGPRS/UMTS) for both Transmit and Receive. A Secondary antenna is used for LTE and other wireless modes(CDMA/GPRS/EGPRS/UMTS) for Receive Only. This device does not support DTM, SVDO, SVLTE.				

941225 D05 SAR for LTE Devices v02 (Continued)

#	Description	Information																																						
D	Identify the voice and data transmission requirements for all LTE operating modes and exposure conditions, for standalone and simultaneous transmission, with respect to the required head and body test configurations, antenna locations, handset flip or slide cover positions, antenna diversity requirements, etc.	<p>Data Device Only.</p> <p>Exposure Conditions:</p> <ul style="list-style-type: none"> • Body – Rear, Bottom-edge, Left-edge, Top-edge, and Right-edge of the DUT at a separation distance of 0 cm from the flat phantom. ▪ With Proximity Sensor disabled <ul style="list-style-type: none"> ○ Top-Edge/Right Corner of the DUT with separation distance of 0 mm and 40° angle to the flat body phantom. At the first-stage power back-off. ○ Rear-Surface/Right Corner of the DUT with separation distance of 0 mm and 35° angle to the flat body phantom. At the first-stage power back-off. ○ Rear surface of the DUT at the separation distance of 14 mm to the flat phantom. No Power back-off. ○ Top-edge of the DUT at the separation distance of 14 mm to the flat phantom. No Power back-off. 																																						
E	<p>Identify if Maximum Power Reduction (MPR) is implemented as an optional or permanent feature, i.e., built-in by design:</p> <ol style="list-style-type: none"> 1. MPR may be considered during SAR testing only when the maximum output power is permanently limited by the MPR implemented within the device, according to the RB (resource block) configurations specified in 3GPP/LTE standards. 2. Regardless of network requirements, only those RB configurations allowed (see 3GPP standards) for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR. 3. A-MPR (additional MPR) must be disabled during SAR testing. 	<p>As per 3GPP TS 36.101 v11.0.0 (2012-03)</p> <p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>A-MPR is supported by design, but is disabled for SAR testing. A-MPR is disabled, by using Network Setting value of NS_01.</p>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																	
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																	
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																	
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																	

941225 D05 SAR for LTE Devices v02 (Continued)

#	Description	Information
F	When power reduction is required for one or more LTE modes to satisfy SAR compliance for simultaneous transmission or other equipment certification and operating requirements, maximum average conducted output power measurement results for each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands are required.	Yes. A Proximity sensor for cellular power reduction is implemented in the device to address RF exposure compliance when the cellular antenna is positioned close to the user's body or other objects. See Section 8.4 for details.
G	Based on the design specifications and other information available to the manufacturer, through measurement and analysis during product development, when the maximum output power for different RB allocations and RB offset conditions within a channel bandwidth, modulation, or across the channels in a frequency band varies by more than 1 dB, a KDB inquiry is required to confirm if the required test channels are appropriate for SAR testing or if a different set of required test channels is necessary.	Refer to the Section 10
H	The maximum average conducted output power should be measured for the required test channels, for each channel bandwidth and uplink modulation, in each frequency band, using the following configurations to support the SAR test reduction and exclusion applied in the evaluation: <ol style="list-style-type: none"> 1. 100% RB allocation 2. 1 RB and also 50% RB allocation, offset to the upper and lower edges of each required test channel and also to the middle of the channel bandwidth 	Refer to the Section 10
I	Spectrum plots should be included in SAR reports to demonstrate the tested RB allocations have been established correctly at the maximum output power conditions.	Refer to the Section 10

8.5. Power Reduction by Proximity Sensing

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations. This design combines the antenna printed directly on a plastic part and proximity sensor FPC (Flexible Printed Circuit) bonded together into one piece.

8.5.1. Proximity Sensor Detection Area

The proximity sensor is combined with the primary antenna in a single FPC (Flexible Printed Circuit), therefore, the proximity sensor occupies the same area as the primary antenna.

A two-step power back-off mechanism is implemented in this device. For design and testing purposes Top-Edge, Front Surface, and Rear Surface are chosen as the dimensions of interest.


The proximity sensor is triggered at the following conservative distances when:

- the Top-edge of the device is 20 mm for the first-stage trigger, and 14mm for the second-stage trigger, from the phantom.
- the Rear Surface of the device is 20 mm for the first-stage trigger, and 14mm for the second-stage trigger, from the phantom.

The expected capacitance trigger values are programmed in each device for each power back-off stage. Capacitance trigger value for first stage (t1) is C1, and for second stage (t2) is C2. C1 is always smaller than C2.

When a certain object or human body approaches the DUT, if the measured capacitance is lower than C1, proximity sensor is not triggered. If the measured capacitance is higher than C1, but lower than C2, first power back-off (P1) is triggered. If the measured capacitance is higher than C2, second power back-off (P2) is triggered

Right Edge (Edge 2)

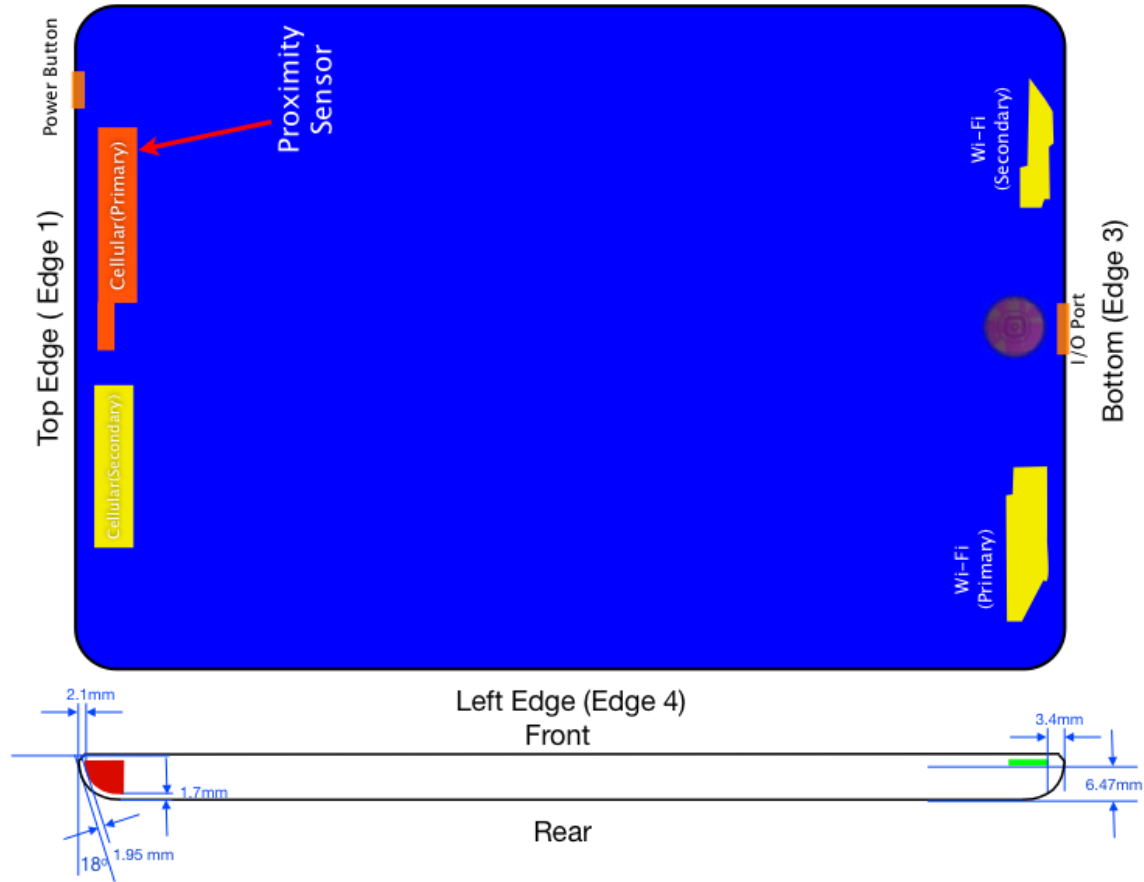


Separation Distances (mm)	Cellular (Primary)	Cellular (Secondary)	Wi-Fi (Primary)	Wi-Fi (Secondary)
Cellular (Primary)		5.2	181.2	176.1
Cellular (Secondary)			173.3	185.9
Wi-Fi (Primary)				52.3
Wi-Fi (Secondary)				
Top-Edge (Edge 1)	2.1	2.1	181.3	191.1
Right-Edge (Edge 2)	24.8	75.9	93.5	14.4
Bottom-Edge (Edge 3)	185.1	185.1	3.4	3.4
Left-Edge (Edge 4)	64.1	24.8	9.8	93.5
Rear Surface	1.7	1.7	6.47	6.47

As per the 616217 D04 SAR for laptop and tablets v01, section 6.1, 6.2, following procedure is used to determine the triggering distances.

First, the DUT is moved towards the flat phantom.

Proximity Sensor Status Table when DUT is moving towards the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Top-Edge
30	OFF	OFF
27	OFF	OFF
25	OFF	OFF
24	OFF	OFF
23	OFF	OFF
22	OFF	OFF
21	OFF	OFF
20	ON (C1, t1, P1)	ON (C1, t1, P1)
19	ON (C1, t1, P1)	ON (C1, t1, P1)
18	ON (C1, t1, P1)	ON (C1, t1, P1)
17	ON (C1, t1, P1)	ON (C1, t1, P1)
16	ON (C1, t1, P1)	ON (C1, t1, P1)
15	ON (C1, t1, P1)	ON (C1, t1, P1)
14	ON (C2, t2, P2)	ON (C2, t2, P2)
13	ON (C2, t2, P2)	ON (C2, t2, P2)
12	ON (C2, t2, P2)	ON (C2, t2, P2)
11	ON (C2, t2, P2)	ON (C2, t2, P2)
10	ON (C2, t2, P2)	ON (C2, t2, P2)
9	ON (C2, t2, P2)	ON (C2, t2, P2)
6	ON (C2, t2, P2)	ON (C2, t2, P2)
3	ON (C2, t2, P2)	ON (C2, t2, P2)
0	ON (C2, t2, P2)	ON (C2, t2, P2)

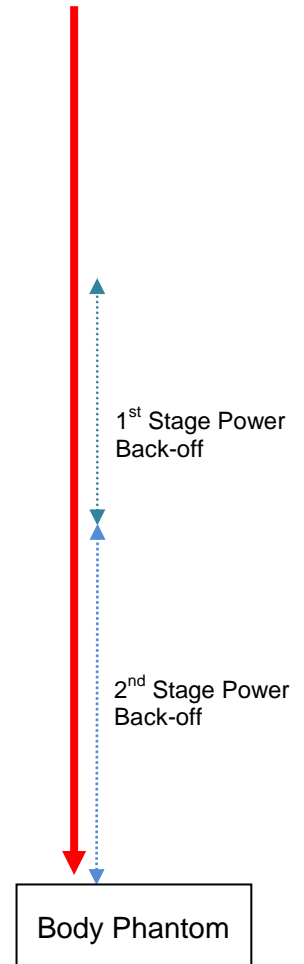


Notes:

- C1: Capacitance value triggered First Stage (t1) power back-off
 - C2: Capacitance value triggered Second Stage (t2) power back-off
 - t1: 1st Stage triggered
 - t2: 2nd Stage triggered
 - P1: Power back-off at 1st Stage
 - P2: Power back-off at 2nd Stage
- The distance at which the proximity sensor triggers is same for all cellular test frequencies.

Now, the DUT is moved away from flat phantom



Proximity Sensor Status Table when DUT is moving away from the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Top-Edge
0	ON (C2, t2, P2)	ON (C2, t2, P2)
3	ON (C2, t2, P2)	ON (C2, t2, P2)
6	ON (C2, t2, P2)	ON (C2, t2, P2)
9	ON (C2, t2, P2)	ON (C2, t2, P2)
10	ON (C2, t2, P2)	ON (C2, t2, P2)
11	ON (C2, t2, P2)	ON (C2, t2, P2)
12	ON (C2, t2, P2)	ON (C2, t2, P2)
13	ON (C2, t2, P2)	ON (C2, t2, P2)
14	ON (C2, t2, P2)	ON (C2, t2, P2)
15	ON (C1, t1, P1)	ON (C1, t1, P1)
16	ON (C1, t1, P1)	ON (C1, t1, P1)
17	ON (C1, t1, P1)	ON (C1, t1, P1)
18	ON (C1, t1, P1)	ON (C1, t1, P1)
19	ON (C1, t1, P1)	ON (C1, t1, P1)
20	ON (C1, t1, P1)	ON (C1, t1, P1)
21	OFF	OFF
22	OFF	OFF
23	OFF	OFF
24	OFF	OFF
25	OFF	OFF
27	OFF	OFF
30	OFF	OFF

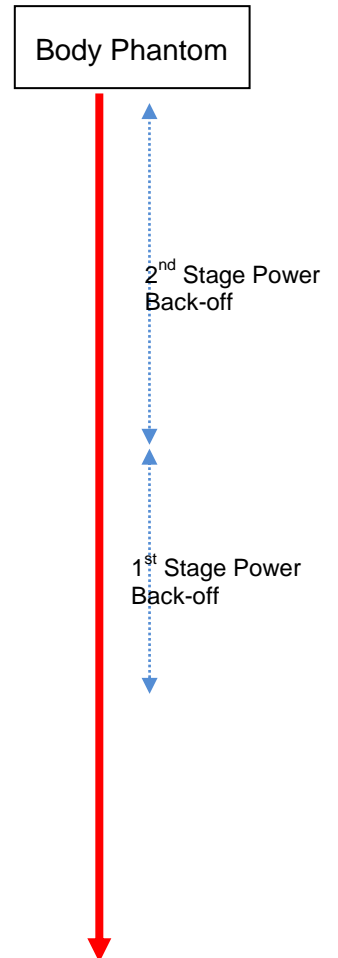

Notes:

- C1: Capacitance value triggered First Stage (t1) power back-off
 - C2: Capacitance value triggered Second Stage (t2) power back-off
 - t1: 1st Stage triggered
 - t2: 2nd Stage triggered
 - P1: Power back-off at 1st Stage
 - P2: Power back-off at 2nd Stage
- The distance at which the proximity sensor triggers is same for all cellular test frequencies.

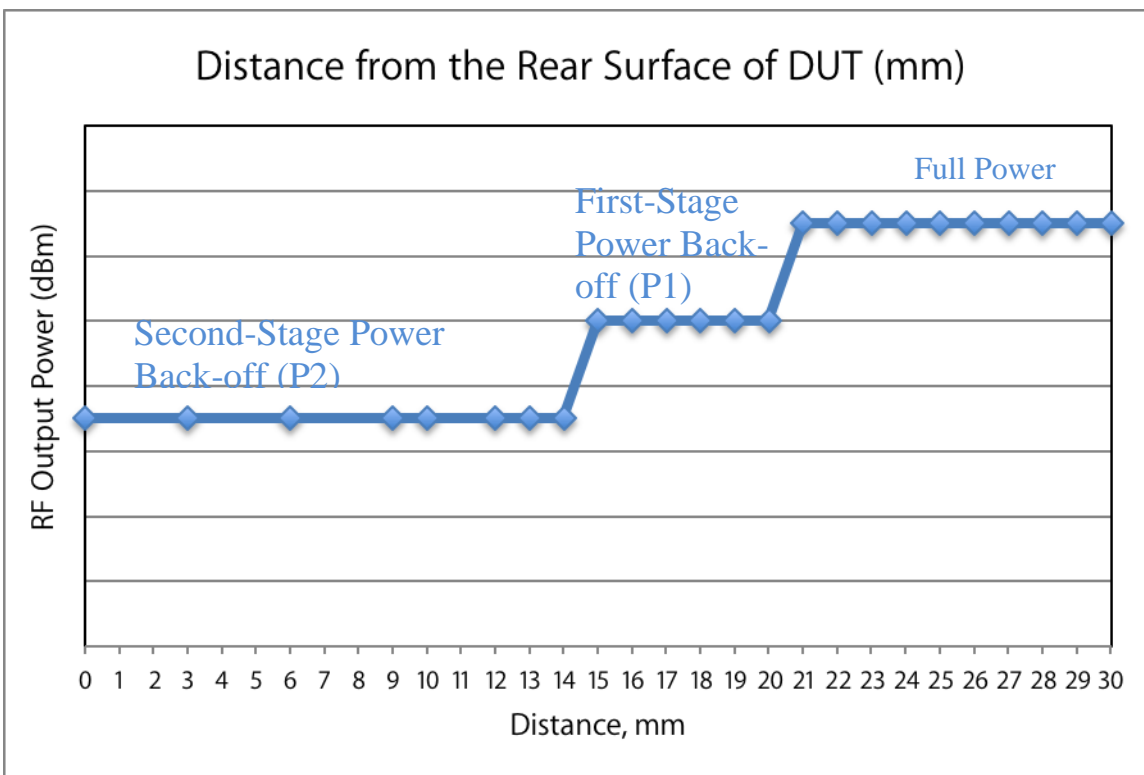
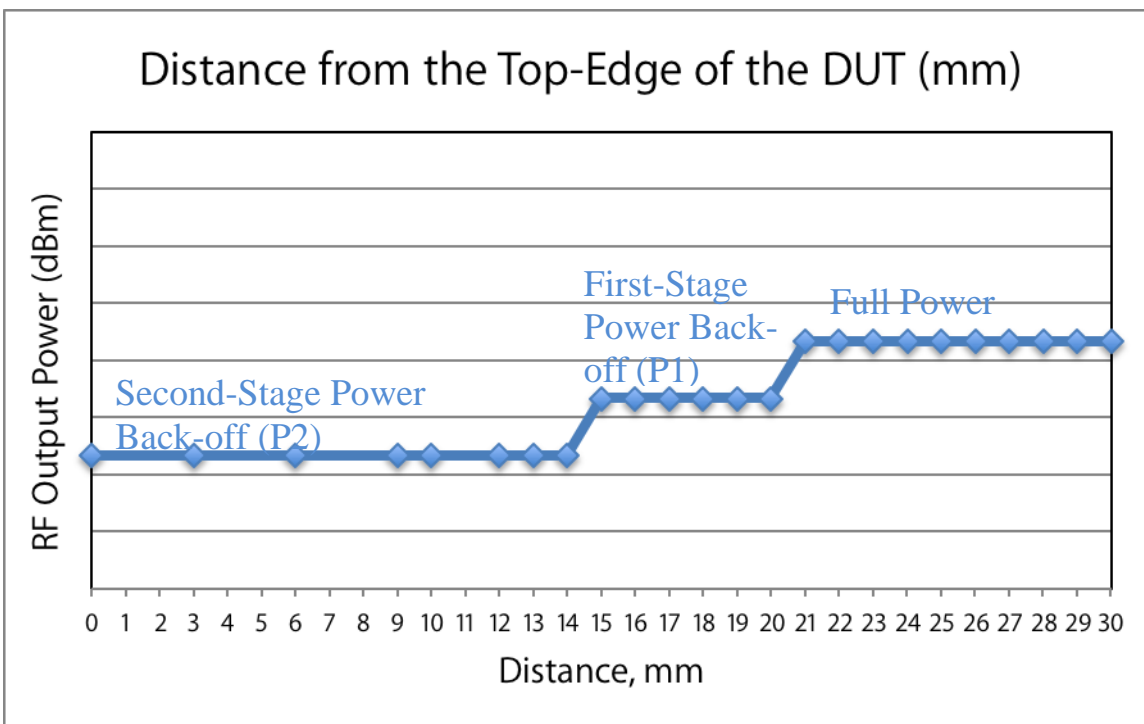


Since, the antenna and proximity sensor are not spatially offset in this implementation, the procedure in KDB 616217, section V.)B.) doesn't apply to device. However, the primary antenna is 24.8 mm from the edge of the device, additional testing is performed to evaluate the coverage of the proximity sensor detection area in the corner of the DUT.

8.5.2. Coverage at the Corner of the DUT


The proximity sensor coverage at the Top-Edge/Right-corner of the device is determined by changing the angle of the device relative to the phantom, and observe the angle at which the proximity sensor is triggered.

In this case, the proximity sensor remains triggered at the first-stage when the Right-Edge of the device is touching the flat phantom, i.e., Top-Edge/Right Corner of the device is 90° from the phantom. The conservative angle at which the first-stage of proximity sensor is triggered is 40°.

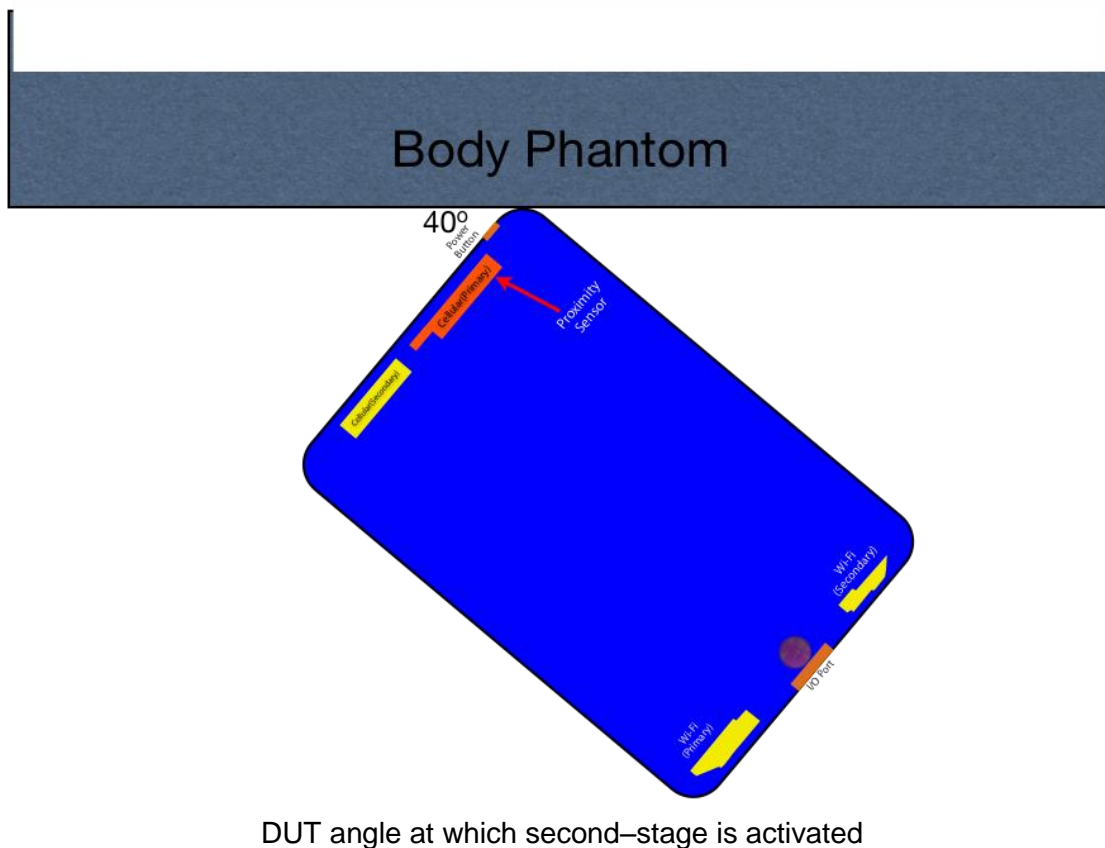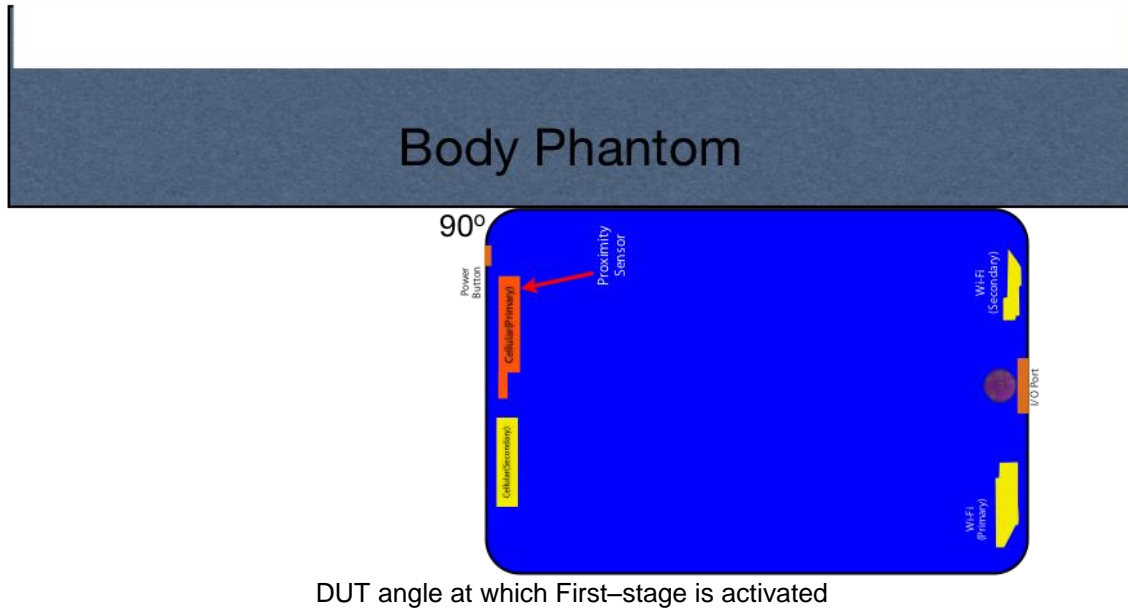

Proximity Sensor Status Table when DUT is moving towards the phantom

Angle to the DUT(Degrees)	Proximity Sensor Status - Top-Edge/Right Corner
90	ON (C1, t1, P1)
85	ON (C1, t1, P1)
80	ON (C1, t1, P1)
75	ON (C1, t1, P1)
70	ON (C1, t1, P1)
65	ON (C1, t1, P1)
60	ON (C1, t1, P1)
55	ON (C1, t1, P1)
50	ON (C1, t1, P1)
45	ON (C1, t1, P1)
44	ON (C1, t1, P1)
43	ON (C1, t1, P1)
42	ON (C1, t1, P1)
41	ON (C1, t1, P1)
40	ON (C2, t2, P2)
39	ON (C2, t2, P2)
38	ON (C2, t2, P2)
35	ON (C2, t2, P2)
30	ON (C2, t2, P2)
25	ON (C2, t2, P2)
20	ON (C2, t2, P2)
15	ON (C2, t2, P2)
10	ON (C2, t2, P2)
5	ON (C2, t2, P2)
0	ON (C2, t2, P2)

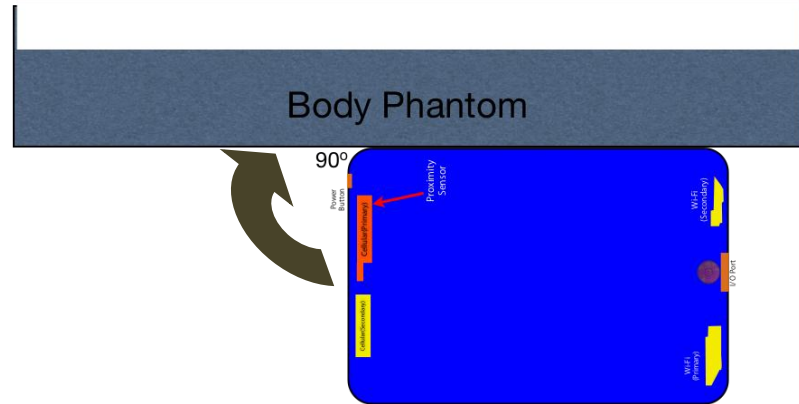


Notes:

- C1: Capacitance value triggered First Stage (t1) power back-off
 - C2: Capacitance value triggered Second Stage (t2) power back-off
 - t1: 1st Stage triggered
 - t2: 2nd Stage triggered
 - P1: Power back-off at 1st Stage
 - P2: Power back-off at 2nd Stage
- The distance at which the proximity sensor triggers is same for all cellular test frequencies.


Proximity Sensor Status Table when DUT is moving away from the phantom

Angle to the DUT(Degrees)	Proximity Sensor Status - Top-Edge/Right Corner
0	ON (C2, t2, P2)
5	ON (C2, t2, P2)
10	ON (C2, t2, P2)
15	ON (C2, t2, P2)
20	ON (C2, t2, P2)
25	ON (C2, t2, P2)
30	ON (C2, t2, P2)
35	ON (C2, t2, P2)
38	ON (C2, t2, P2)
39	ON (C2, t2, P2)
40	ON (C2, t2, P2)
41	ON (C1, t1, P1)
42	ON (C1, t1, P1)
43	ON (C1, t1, P1)
44	ON (C1, t1, P1)
45	ON (C1, t1, P1)
50	ON (C1, t1, P1)
55	ON (C1, t1, P1)
60	ON (C1, t1, P1)
65	ON (C1, t1, P1)
70	ON (C1, t1, P1)
75	ON (C1, t1, P1)
80	ON (C1, t1, P1)
85	ON (C1, t1, P1)
90	ON (C1, t1, P1)

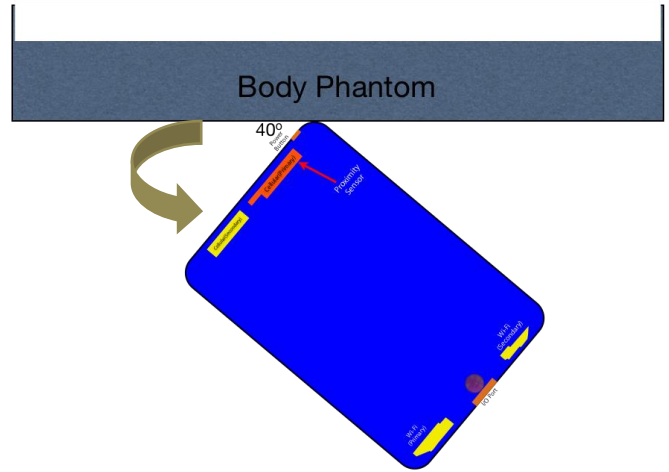


Notes:

- C1: Capacitance value triggered First Stage (t1) power back-off
 - C2: Capacitance value triggered Second Stage (t2) power back-off
 - t1: 1st Stage triggered
 - t2: 2nd Stage triggered
 - P1: Power back-off at 1st Stage
 - P2: Power back-off at 2nd Stage
- The distance at which the proximity sensor triggers is same for all cellular test frequencies.

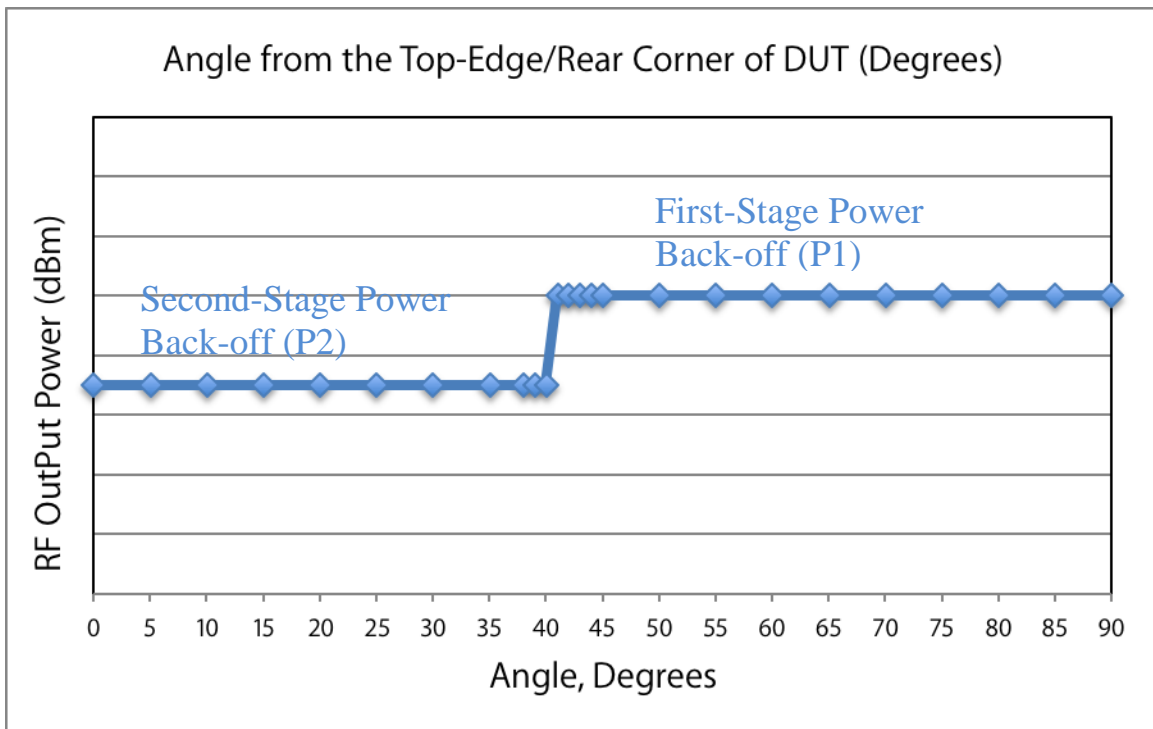


The proximity sensor coverage at the Rear Surface/Right-corner of the device is determined by changing the angle of the device relative to the phantom, and observe the angle at which the proximity sensor is triggered.

In this case, the conservative angles at which the proximity sensor is triggered are: 90° for the first-stage, and 35° for the second-stage, from the phantom. Therefore, the proximity sensor remains triggered at the first-stage when the Right-Edge of the device is touching the flat phantom.

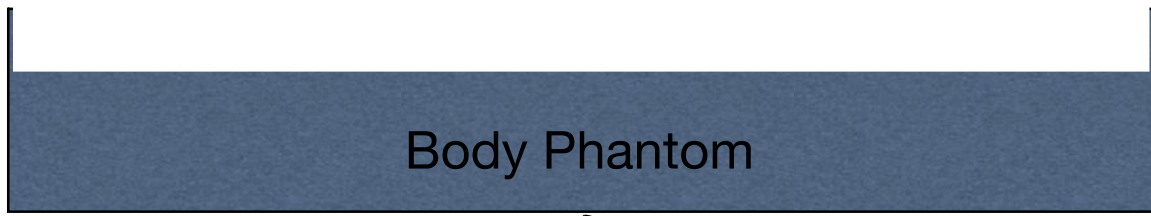


DUT angle at which first-stage is activated

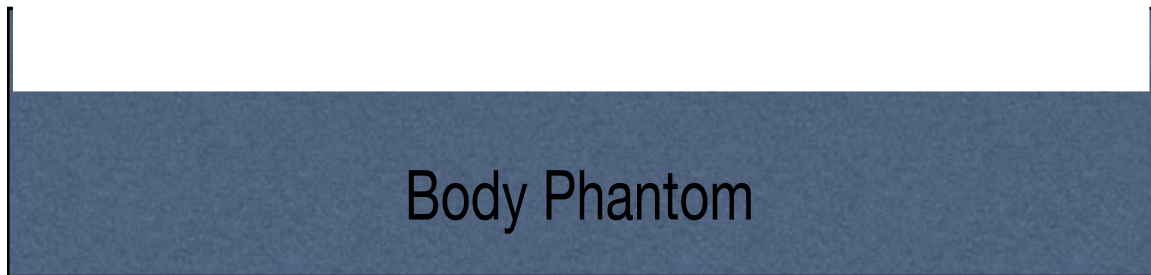

DUT angle at which second-stage is activated

Proximity Sensor Status Table when DUT is moving towards the phantom

Angle to the DUT(Degrees)	Proximity Sensor Status - Rear-Surface/Right Corner
90	ON (C1, t1, P1)
85	ON (C1, t1, P1)
80	ON (C1, t1, P1)
75	ON (C1, t1, P1)
70	ON (C1, t1, P1)
65	ON (C1, t1, P1)
60	ON (C1, t1, P1)
55	ON (C1, t1, P1)
50	ON (C1, t1, P1)
45	ON (C1, t1, P1)
40	ON (C1, t1, P1)
37	ON (C1, t1, P1)
36	ON (C1, t1, P1)
35	ON (C2, t2, P2)
34	ON (C2, t2, P2)
33	ON (C2, t2, P2)
30	ON (C2, t2, P2)
25	ON (C2, t2, P2)
20	ON (C2, t2, P2)
15	ON (C2, t2, P2)
10	ON (C2, t2, P2)
5	ON (C2, t2, P2)
0	ON (C2, t2, P2)

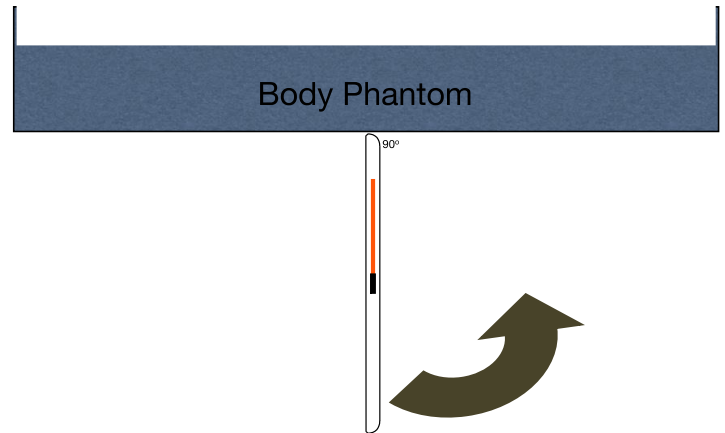


Notes:

- C1: Capacitance value triggered First Stage (t1) power back-off
 - C2: Capacitance value triggered Second Stage (t2) power back-off
 - t1: 1st Stage triggered
 - t2: 2nd Stage triggered
 - P1: Power back-off at 1st Stage
 - P2: Power back-off at 2nd Stage
- The distance at which the proximity sensor triggers is same for all cellular test frequencies.


Proximity Sensor Status Table when DUT is moving away from the phantom

Angle to the DUT(Degrees)	Proximity Sensor Status - Rear-Surface/Right Corner
0	ON (C2, t2, P2)
5	ON (C2, t2, P2)
10	ON (C2, t2, P2)
15	ON (C2, t2, P2)
20	ON (C2, t2, P2)
25	ON (C2, t2, P2)
30	ON (C2, t2, P2)
33	ON (C2, t2, P2)
34	ON (C2, t2, P2)
35	ON (C2, t2, P2)
36	ON (C1, t1, P1)
37	ON (C1, t1, P1)
40	ON (C1, t1, P1)
45	ON (C1, t1, P1)
46	ON (C1, t1, P1)
47	ON (C1, t1, P1)
50	ON (C1, t1, P1)
55	ON (C1, t1, P1)
60	ON (C1, t1, P1)
65	ON (C1, t1, P1)
70	ON (C1, t1, P1)
75	ON (C1, t1, P1)
80	ON (C1, t1, P1)
85	ON (C1, t1, P1)
90	ON (C1, t1, P1)

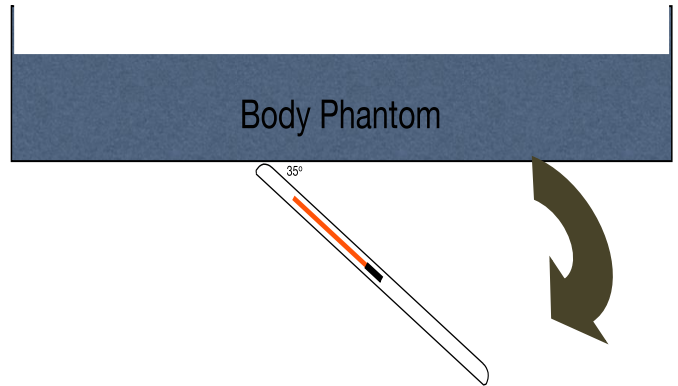

Notes:

- C1: Capacitance value triggered First Stage (t1) power back-off
 - C2: Capacitance value triggered Second Stage (t2) power back-off
 - t1: 1st Stage triggered
 - t2: 2nd Stage triggered
 - P1: Power back-off at 1st Stage
 - P2: Power back-off at 2nd Stage
- The distance at which the proximity sensor triggers is same for all cellular test frequencies.

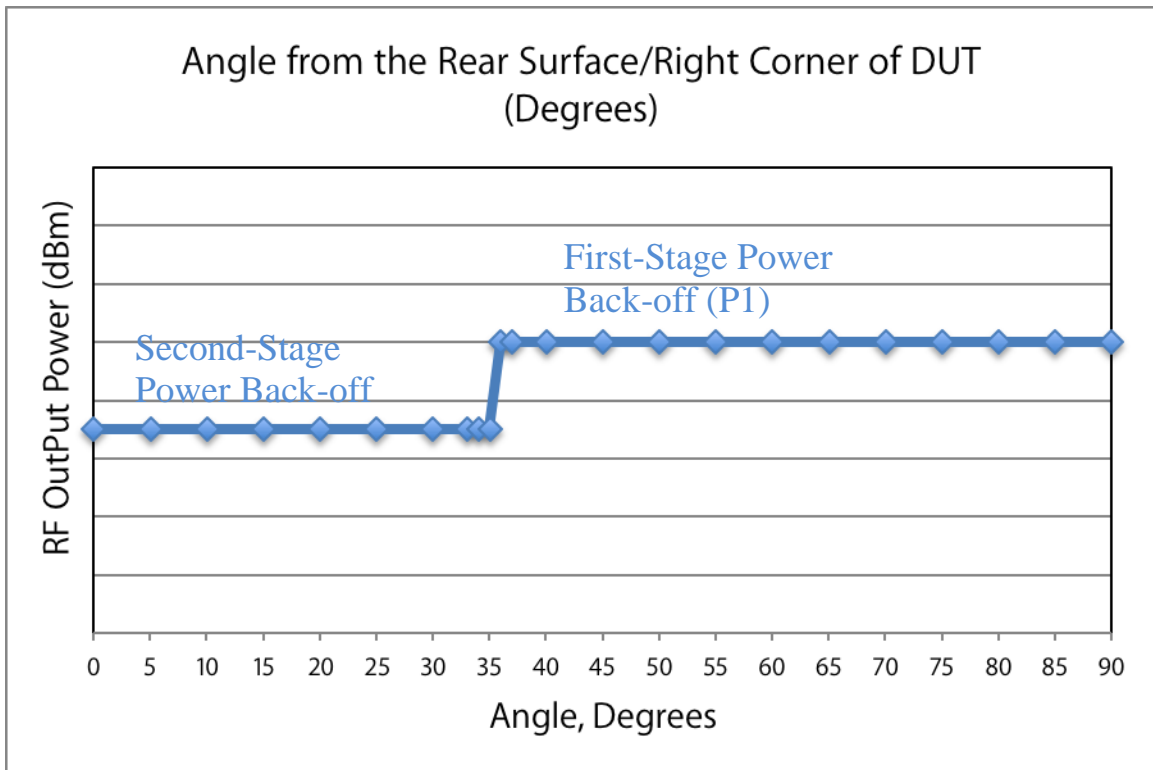

With the Top-Edge of the device against the phantom, when the front of the device (LCD side) is tilted toward the phantom, the proximity sensor will remain triggered all the time.

The proximity sensor is not triggered, when approaching from any other corner, therefore, the proximity sensor coverage is only evaluated when approaching from the Top/Right Corner.

8.5.3. SAR Test Configurations

For body exposure condition, the DUT is evaluated in the following configurations:

- Rear surface of the DUT with separation distance of 0 mm to the flat phantom. The proximity sensor is active and triggered in this configuration, therefore, the conducted power is backed-off.
- Top-Edge/Edge 1 of the DUT with separation distance of 0 mm to the flat phantom. The proximity sensor is active and triggered in this configuration, therefore, the conducted power is backed-off.
- Bottom-Edge/Edge 3 of the DUT with separation distance of 0 mm to the flat phantom. The proximity sensor is active, but not triggered in this configuration. Therefore, the conducted power is NOT backed-off.
- Left-Edge/Edge 4 of the DUT with separation distance of 0 mm to the flat phantom. The proximity sensor is active, but not triggered in this configuration. Therefore, the conducted power is NOT backed-off.
- Right-Edge/Edge 2 of the DUT with separation distance of 0 mm to the flat phantom. The proximity sensor is active and triggered at the first-stage power back-off level (P1) in this configuration. Therefore, the conducted power is backed-off.
- Rear surface of the DUT with conservative distance of 14 mm to the flat phantom. The proximity sensor is disabled, by special development software, in this configuration. Therefore, the conducted power has NO backed-off.
- Top-Edge/Edge 1 of the DUT with conservative distance of 14 mm to the flat phantom. The proximity sensor is disabled, by special development software, in this configuration. Therefore, the conducted power has NO backed-off.
- Top-Edge/Edge 1 of the DUT with separation distance of 0 mm and 40° angle to the flat body phantom. The proximity sensor is set to the first-stage power back-off level (P1), by special development software, in this configuration.
- Rear-Surface of the DUT with separation distance of 0 mm and 35° angle to the flat body phantom. The proximity sensor is set to the first-stage power back-off level (P1), by special development software, in this configuration.

SAR evaluation of the DUT on the Front Surface with separation distance of 0 mm to the flat phantom is NOT performed because there is no use case for this configuration.



8.5.4. Special Development Software

During the 14 mm (Top-Edge), Rear (14mm), Right-Edge (0mm), 40° angle from the Top-Edge (0mm), and 35° angle from the Rear Surface (0mm) SAR evaluation, the power reduction due to proximity sensor was disabled using a series of test commands which are only available in development software. The proximity sensor or the power reduction cannot be intentionally or unintentionally turned-off by the user. The software provided on production units will not allow the proximity sensor or the power cap to be disabled.



8.6. Power Reduction per Air-interface



The following graphs show the power level vs the distance from the DUT to the flat phantom for the Top-Edge and Rear Surface.



8.6.1. GSM Bands

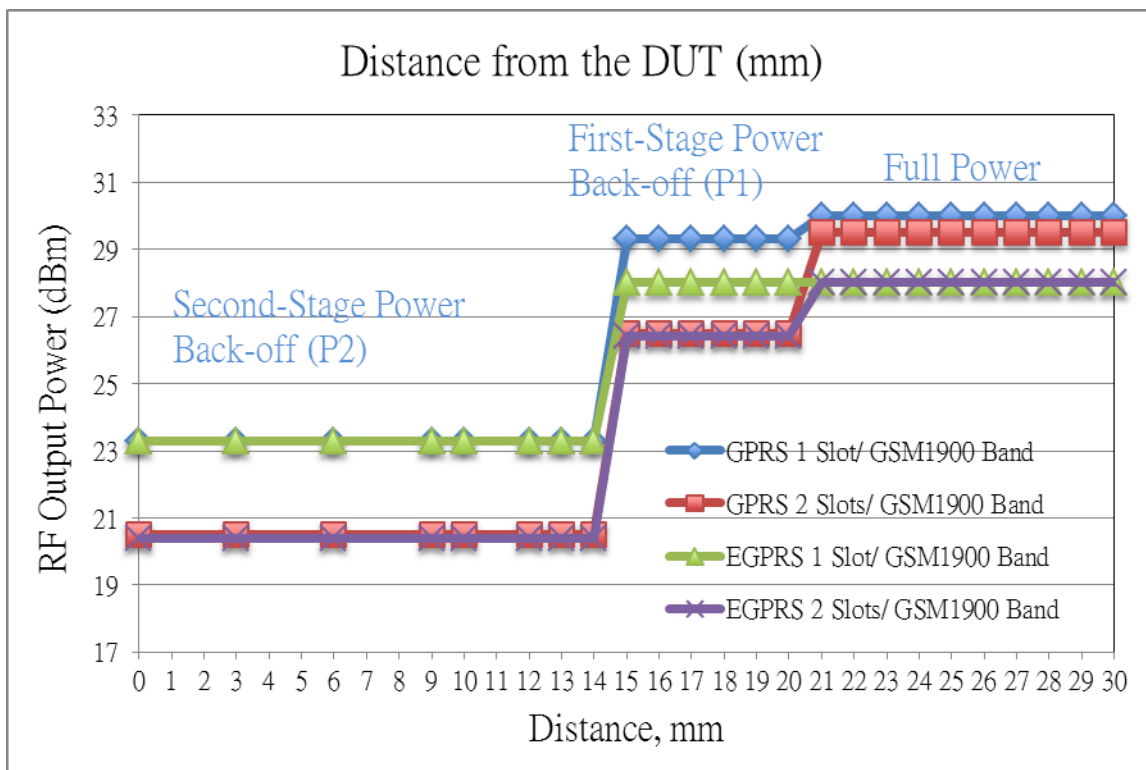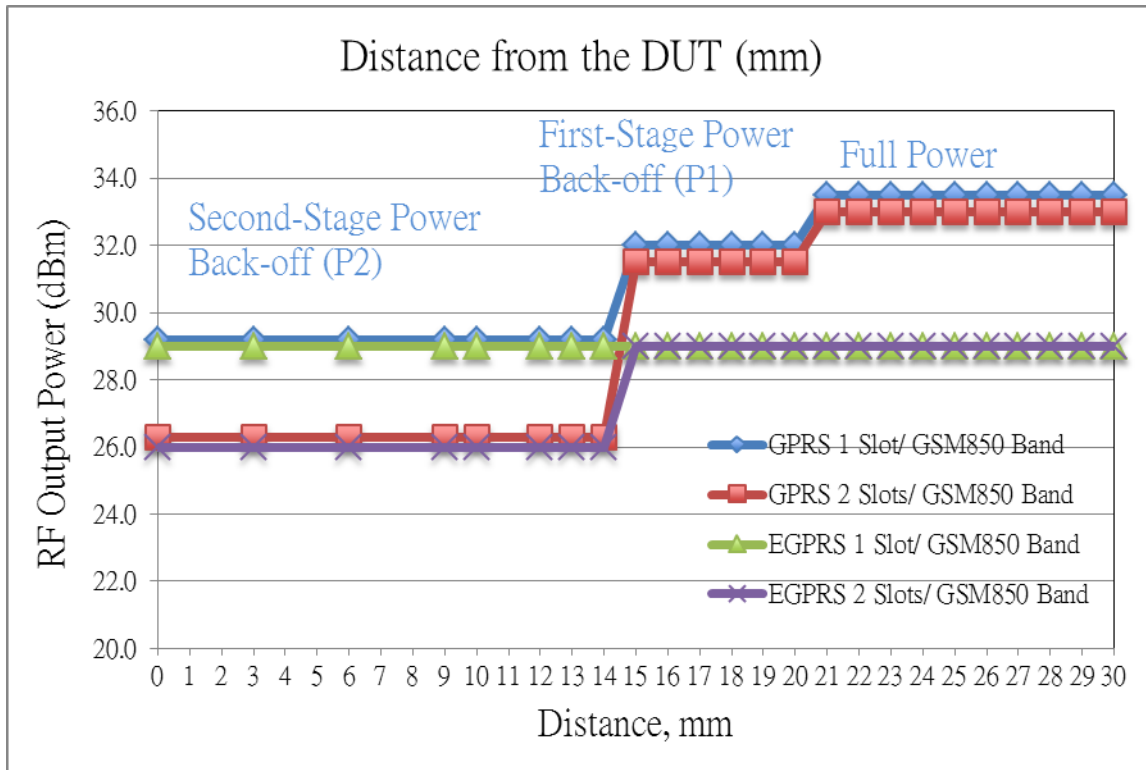



8.6.2. WCDMA Bands

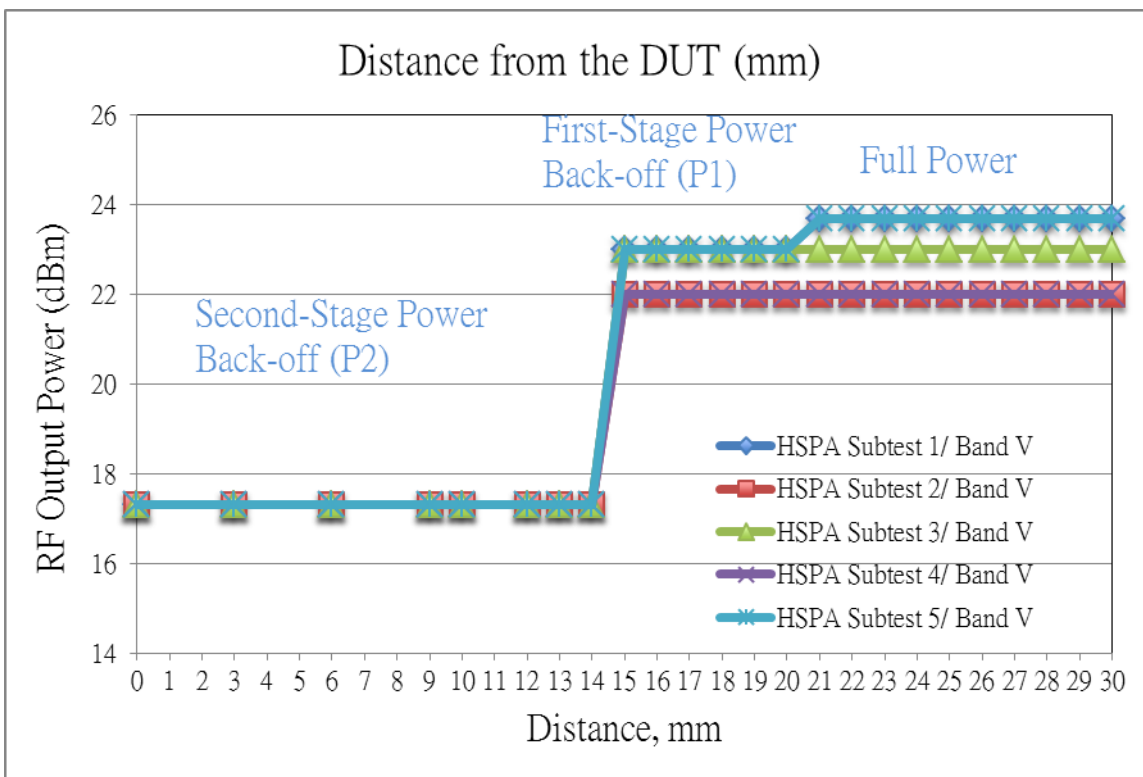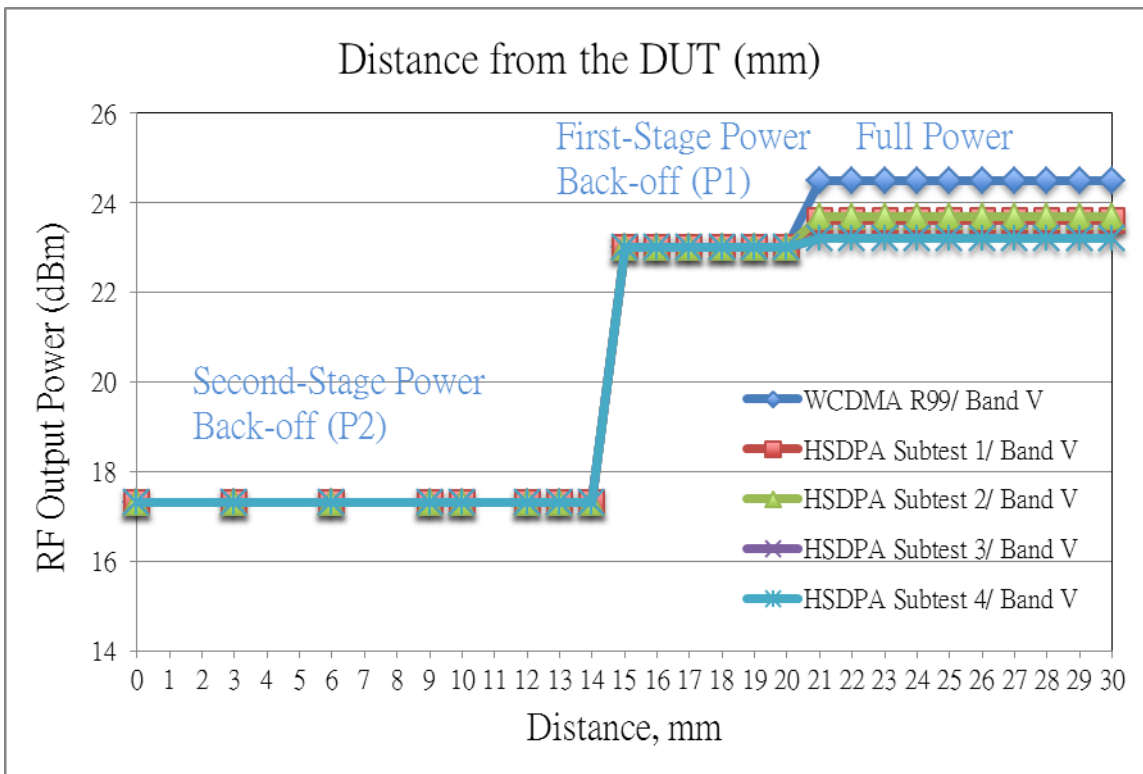


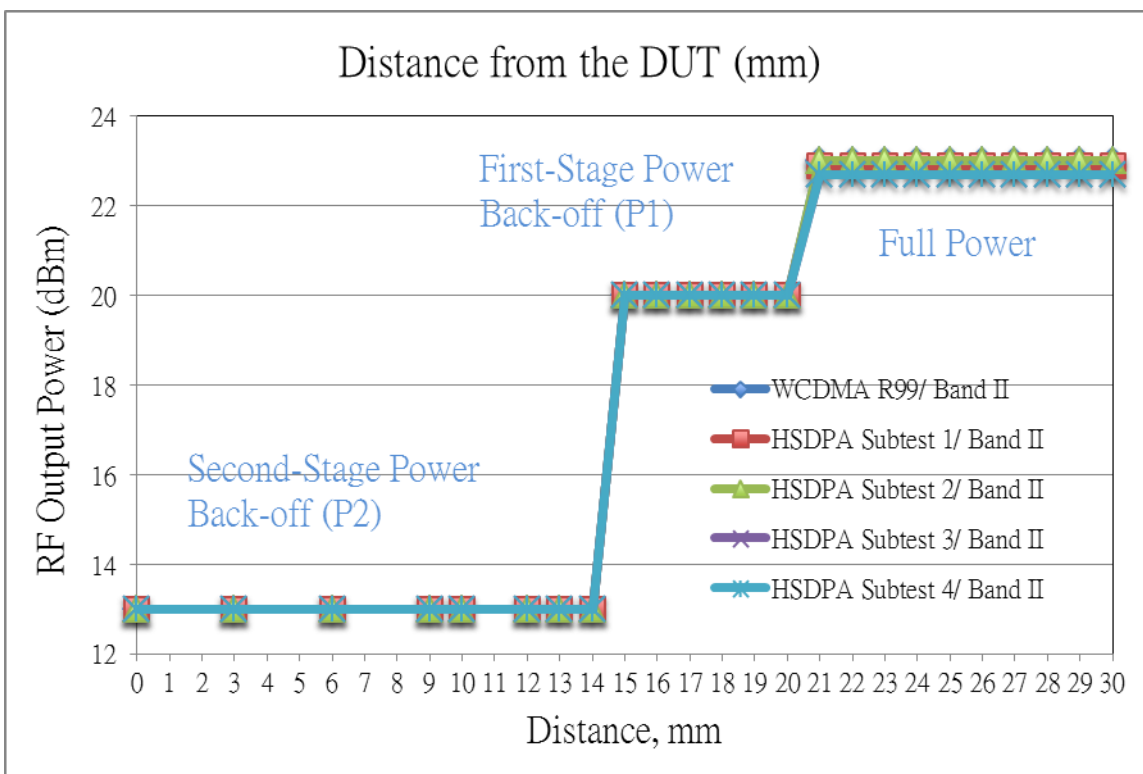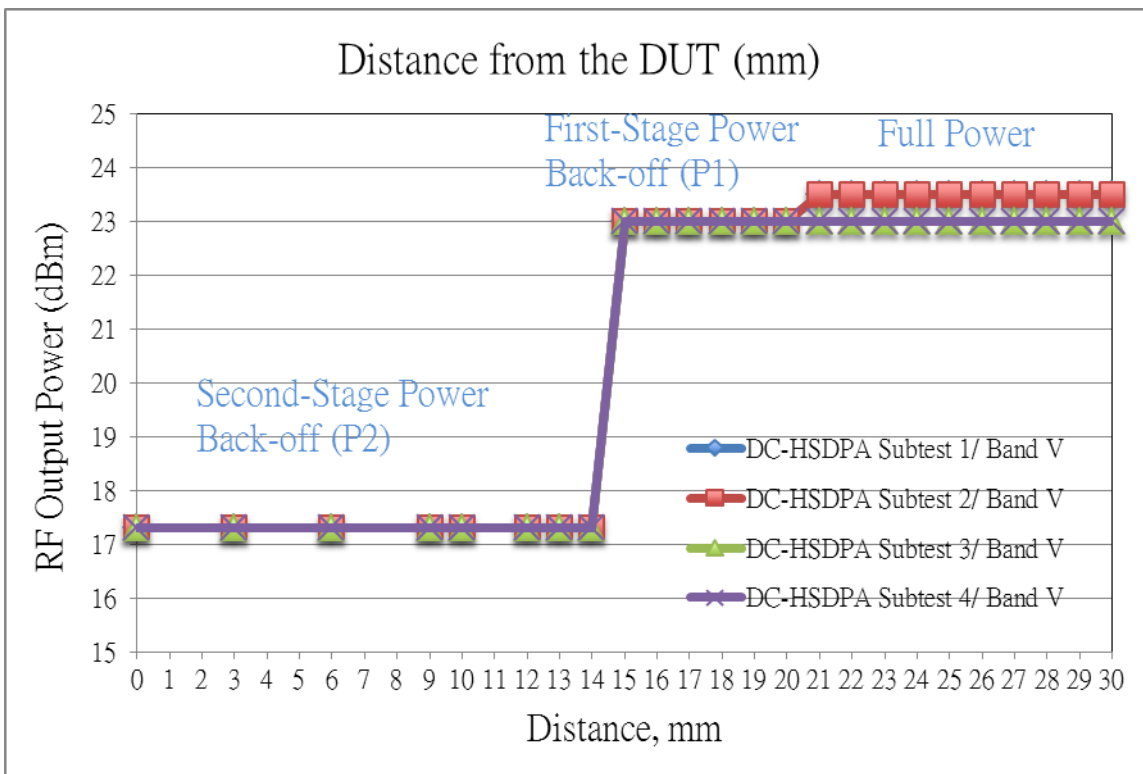

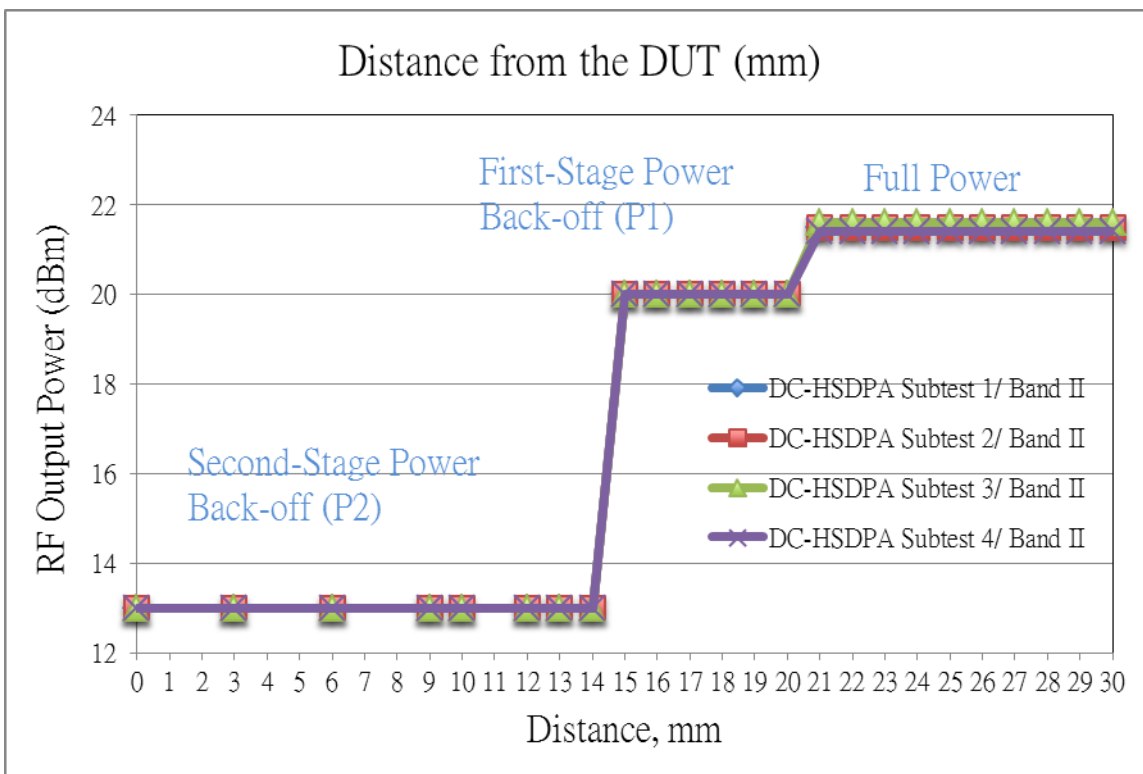
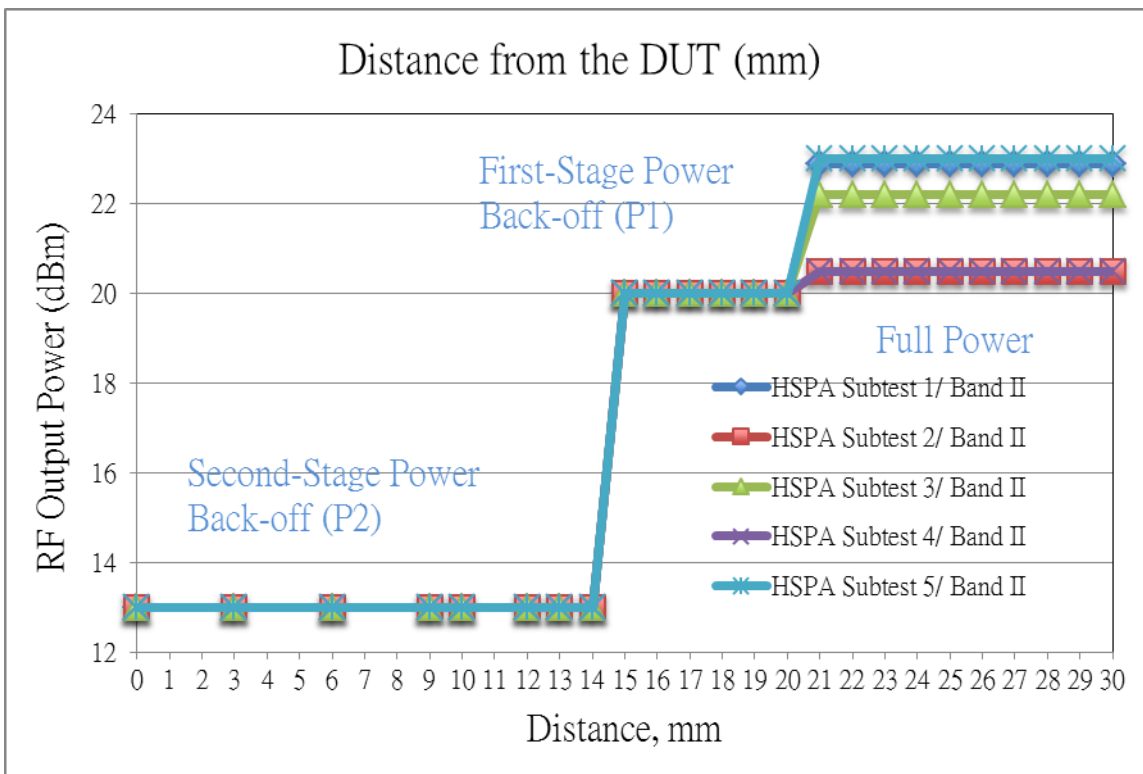




8.6.3. CDMA Bands

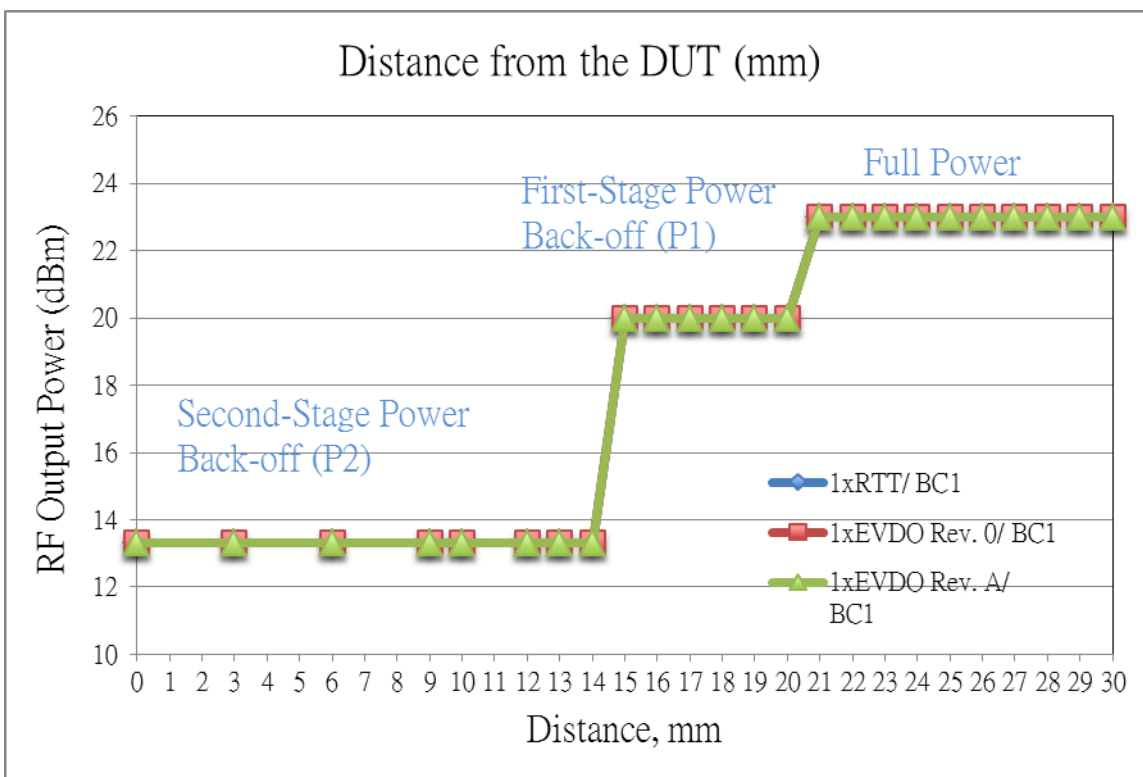
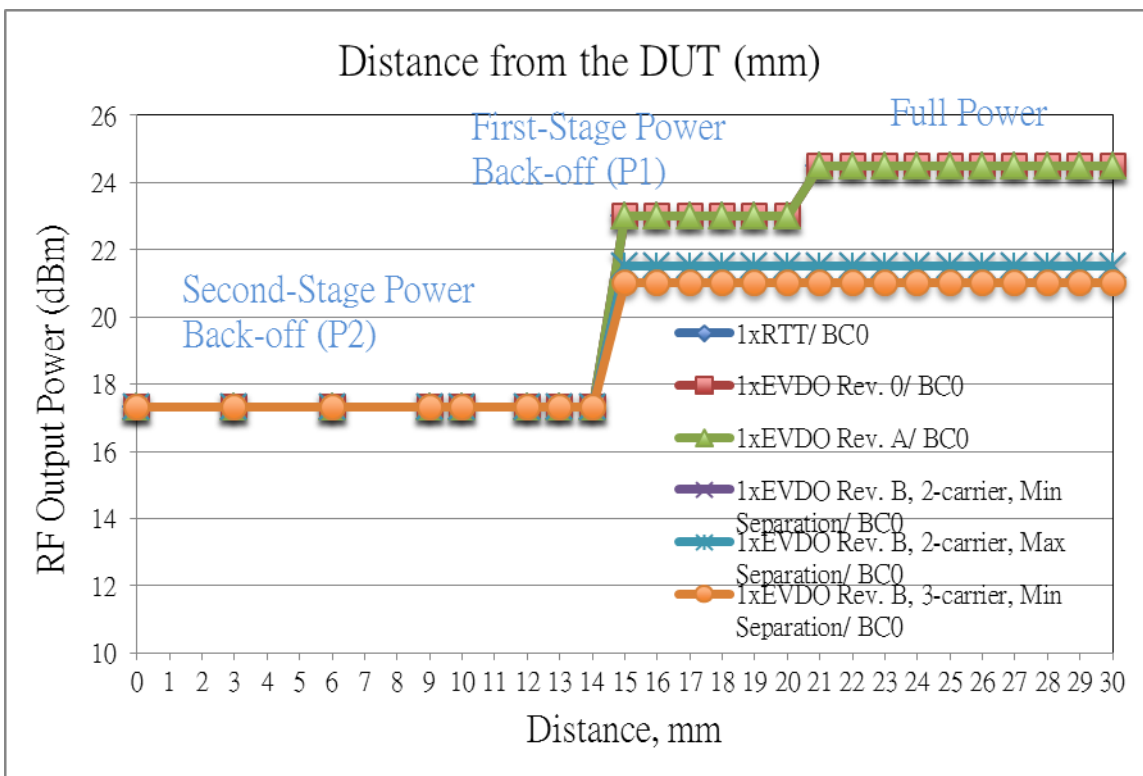



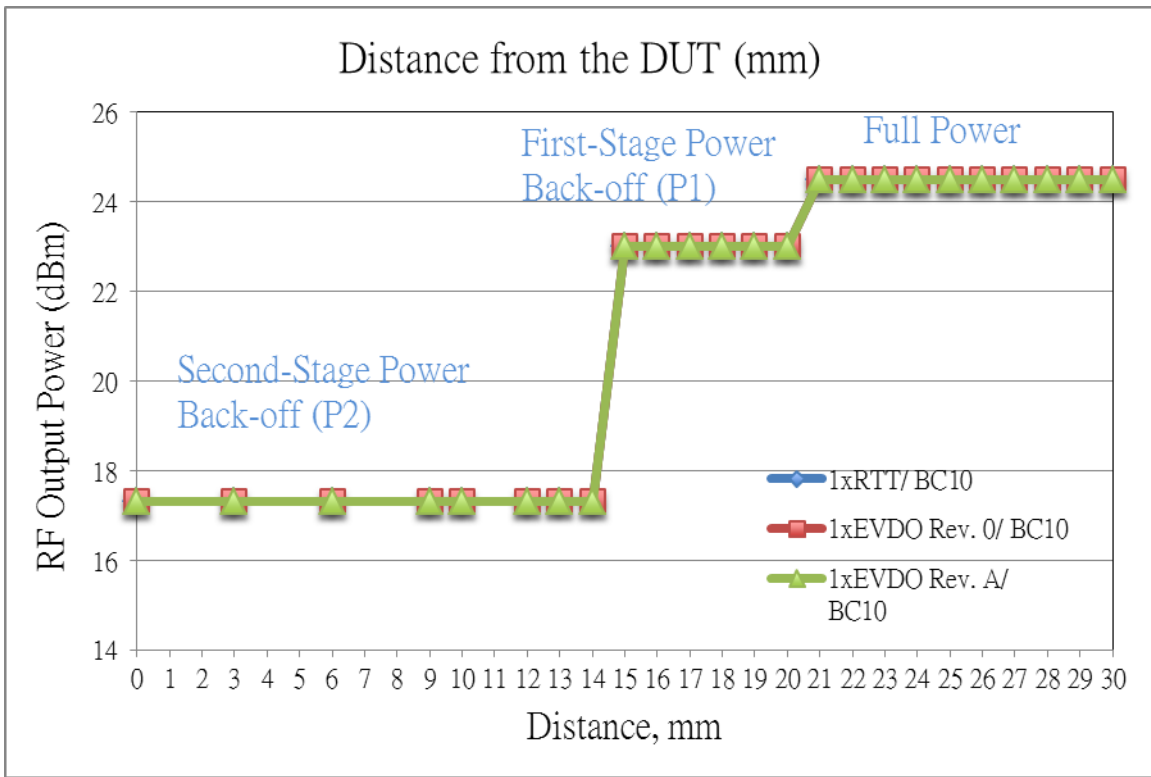




8.6.4. LTE Bands

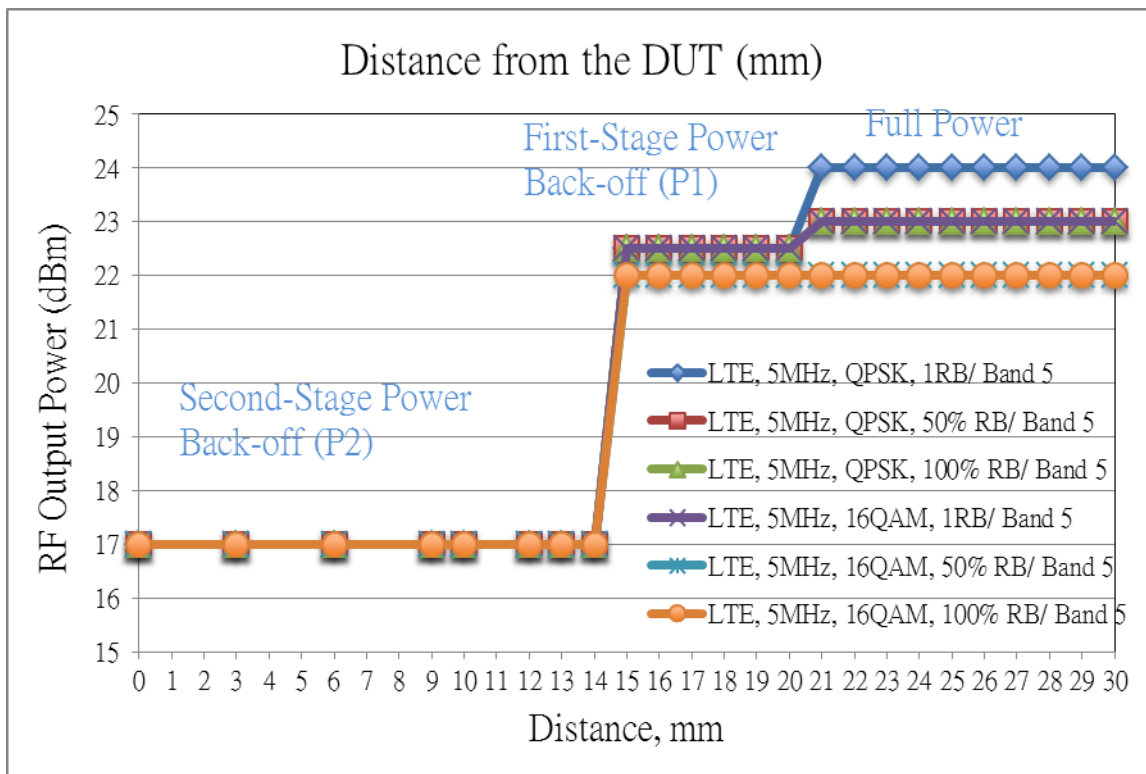
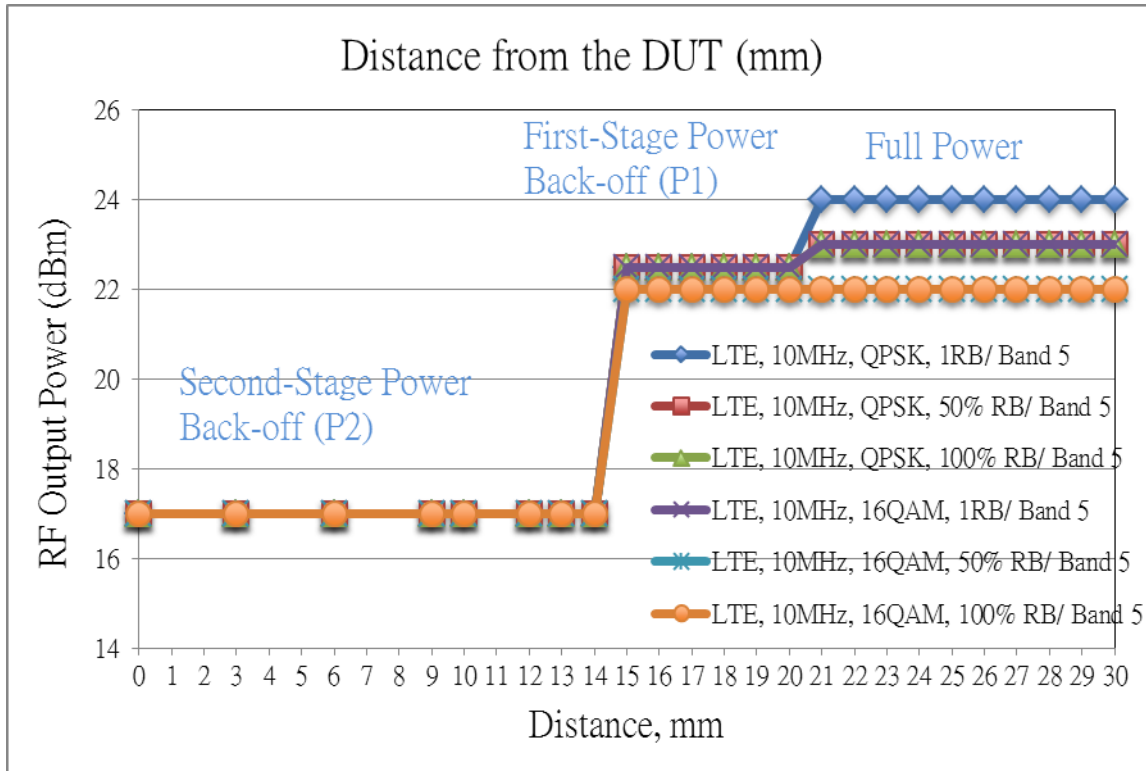


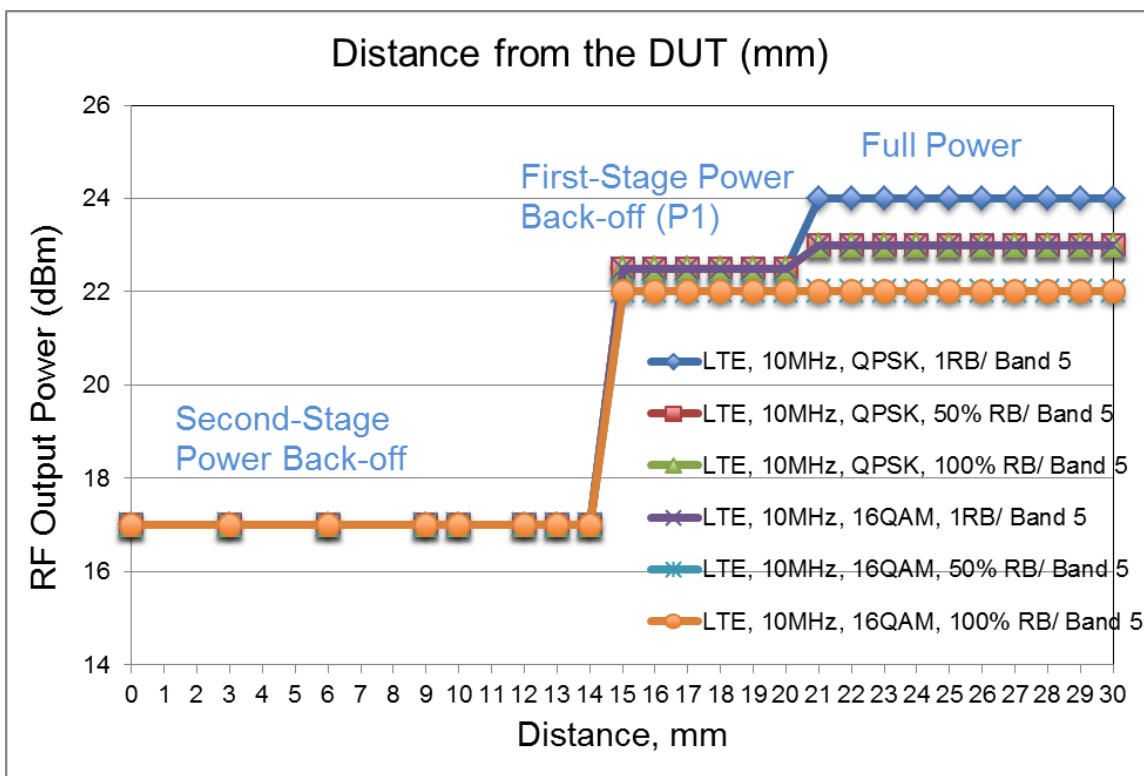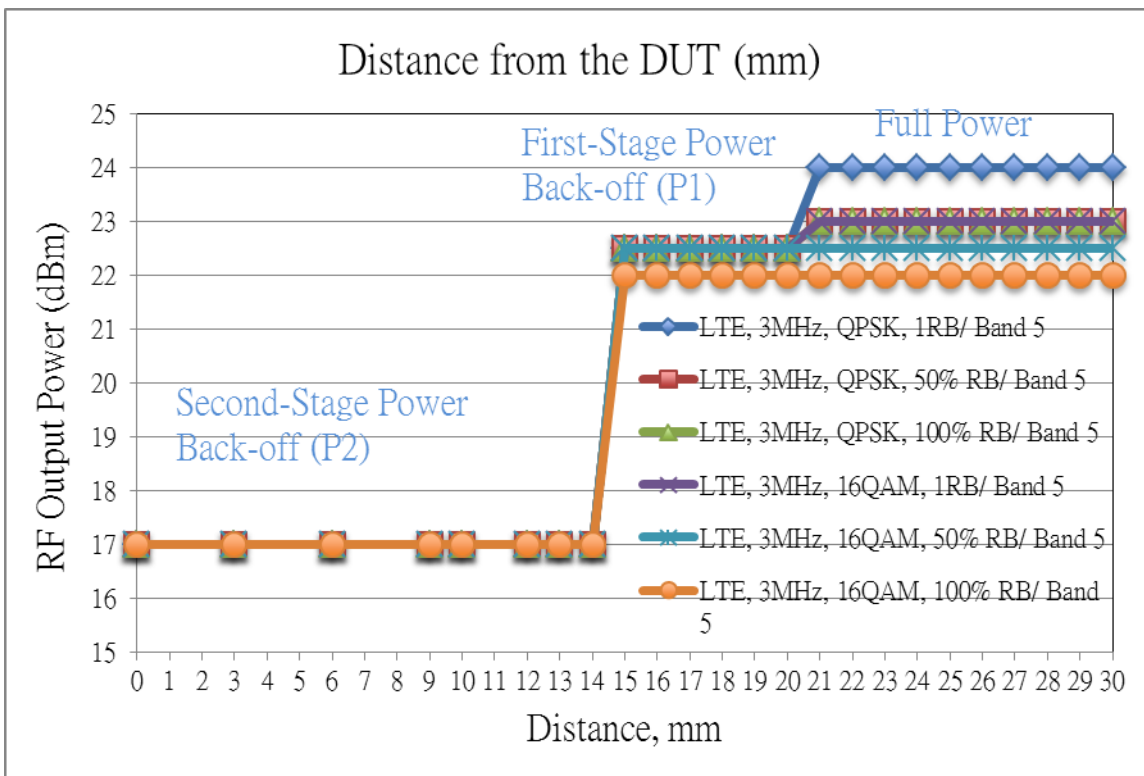

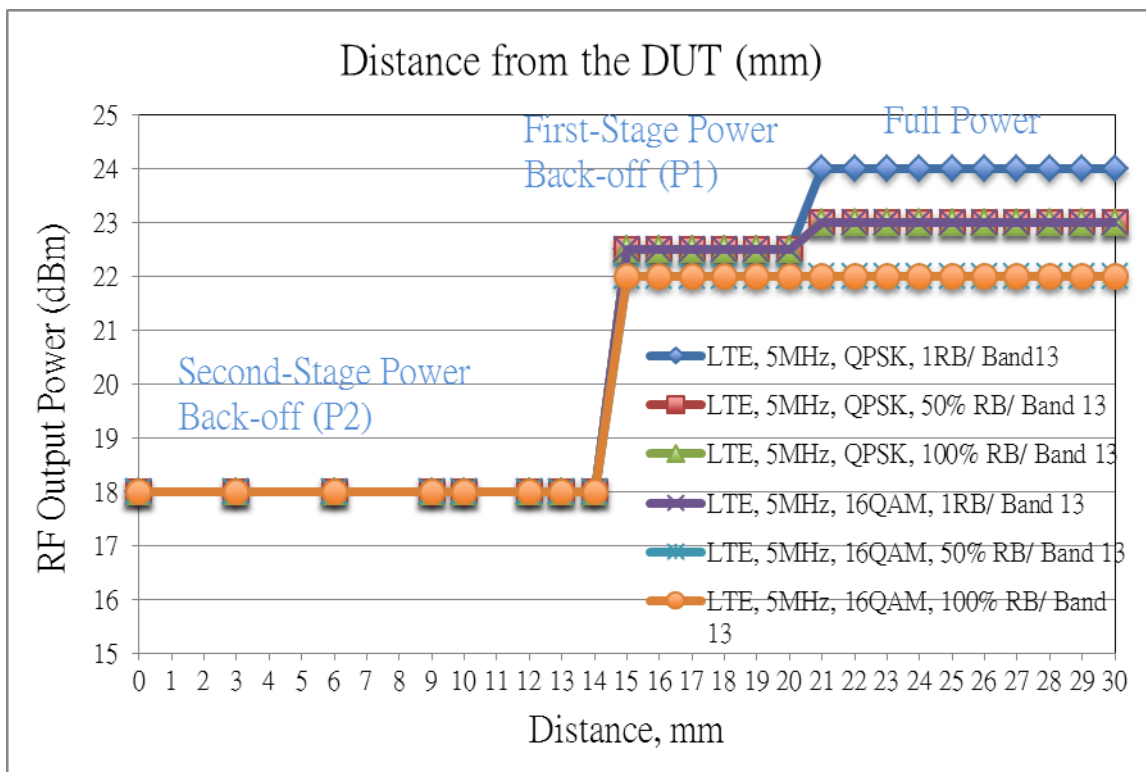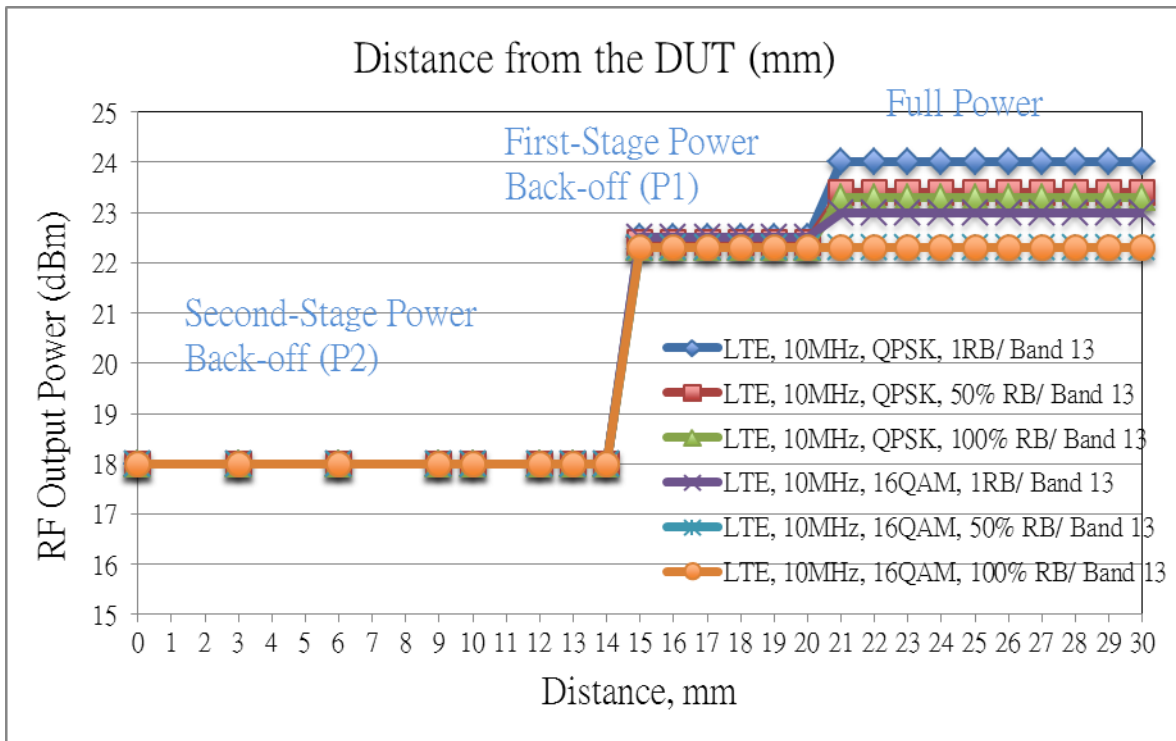

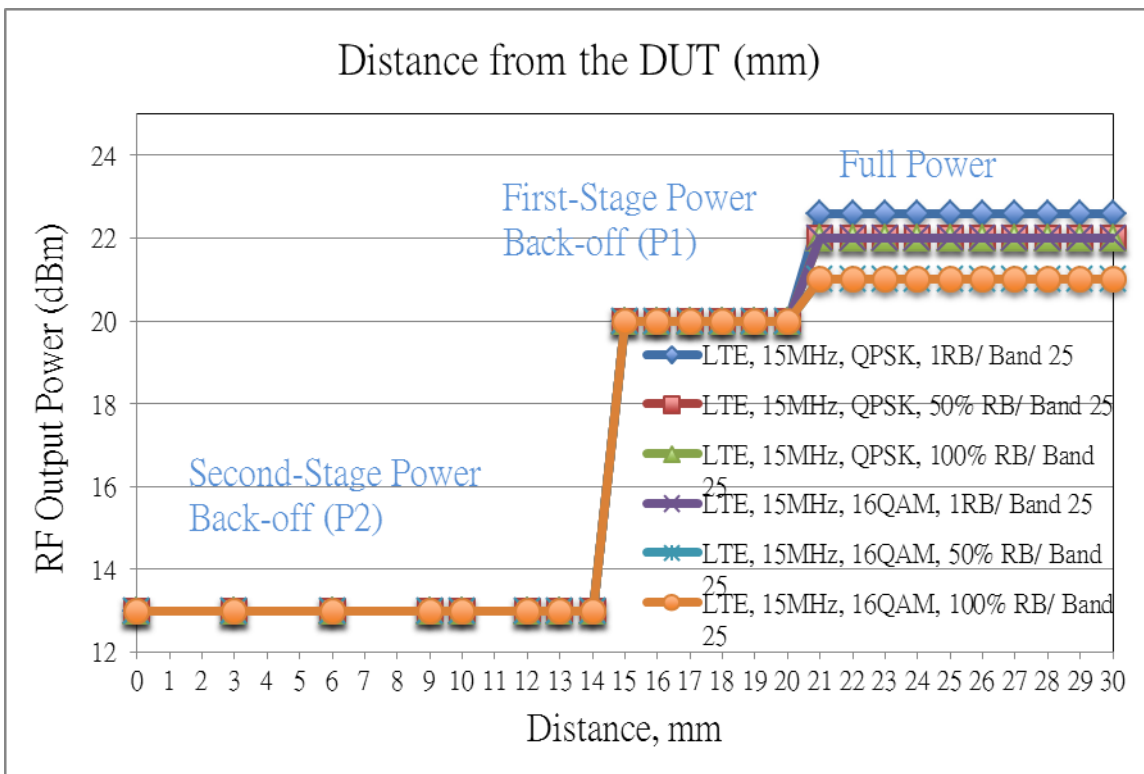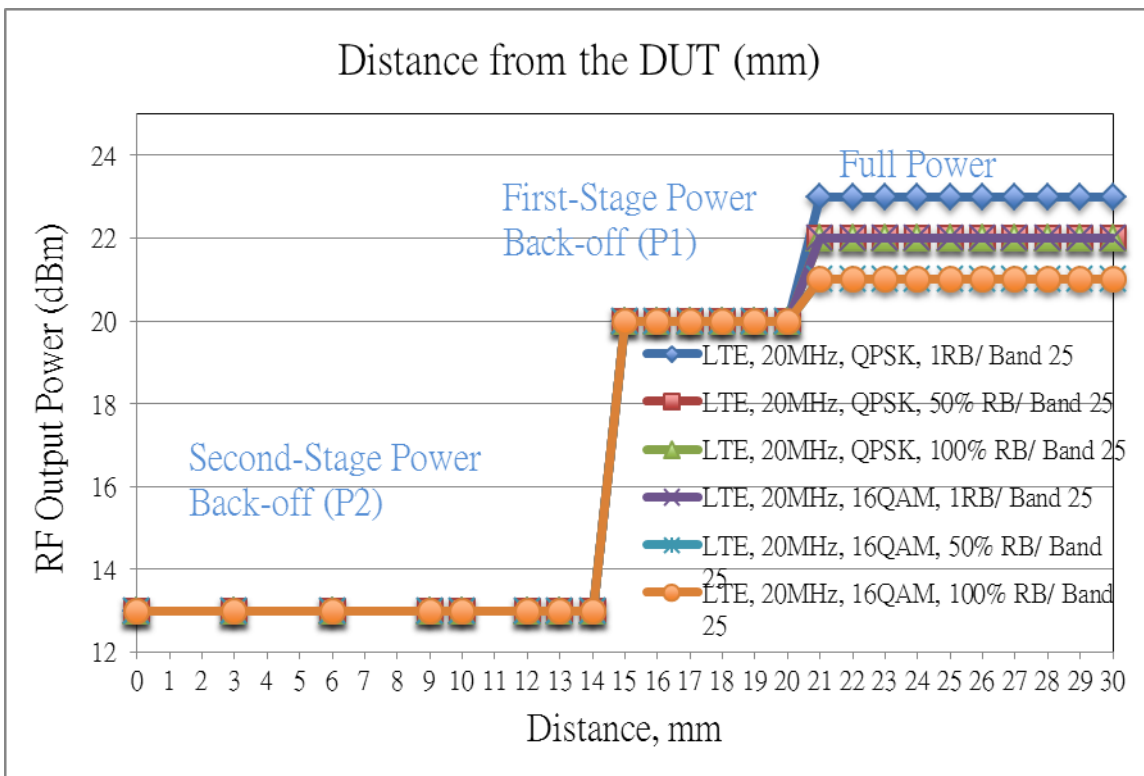

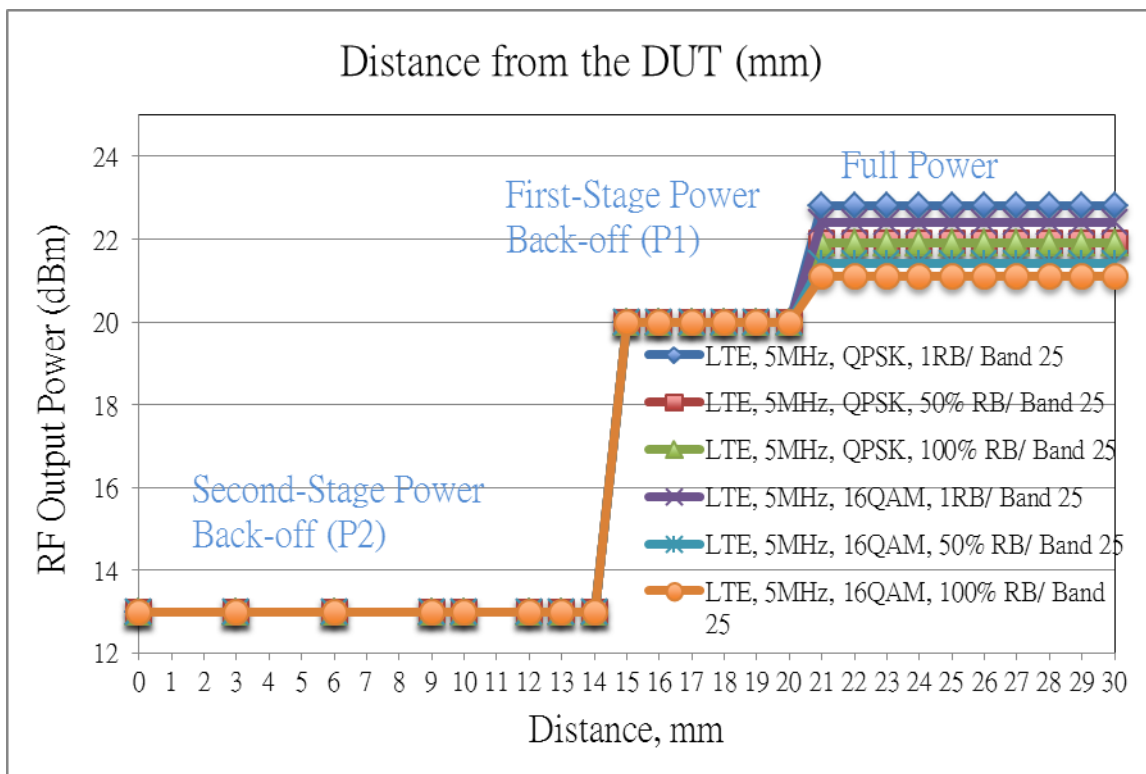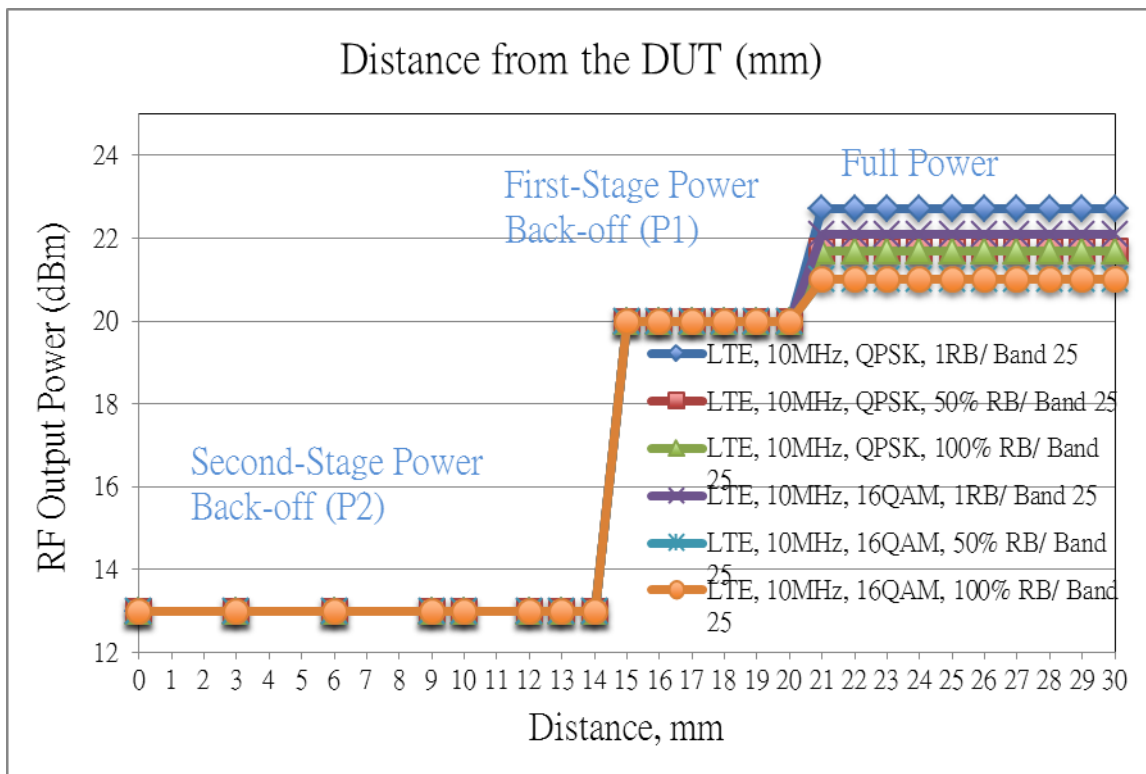

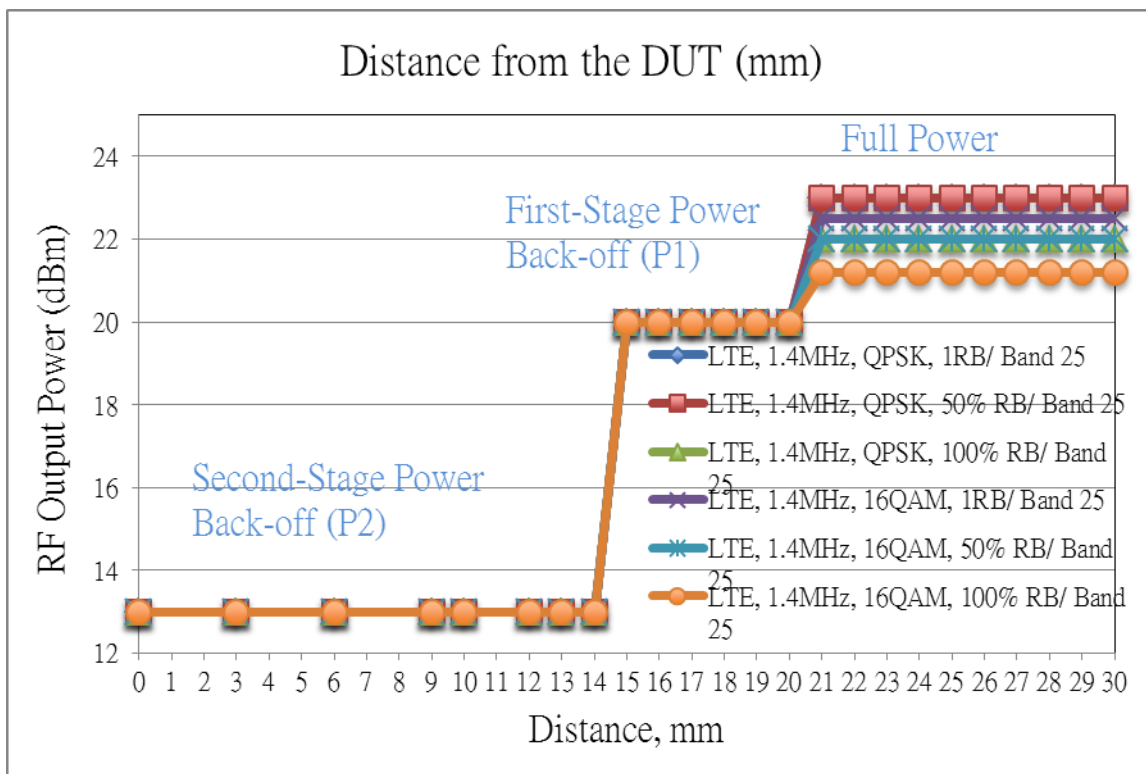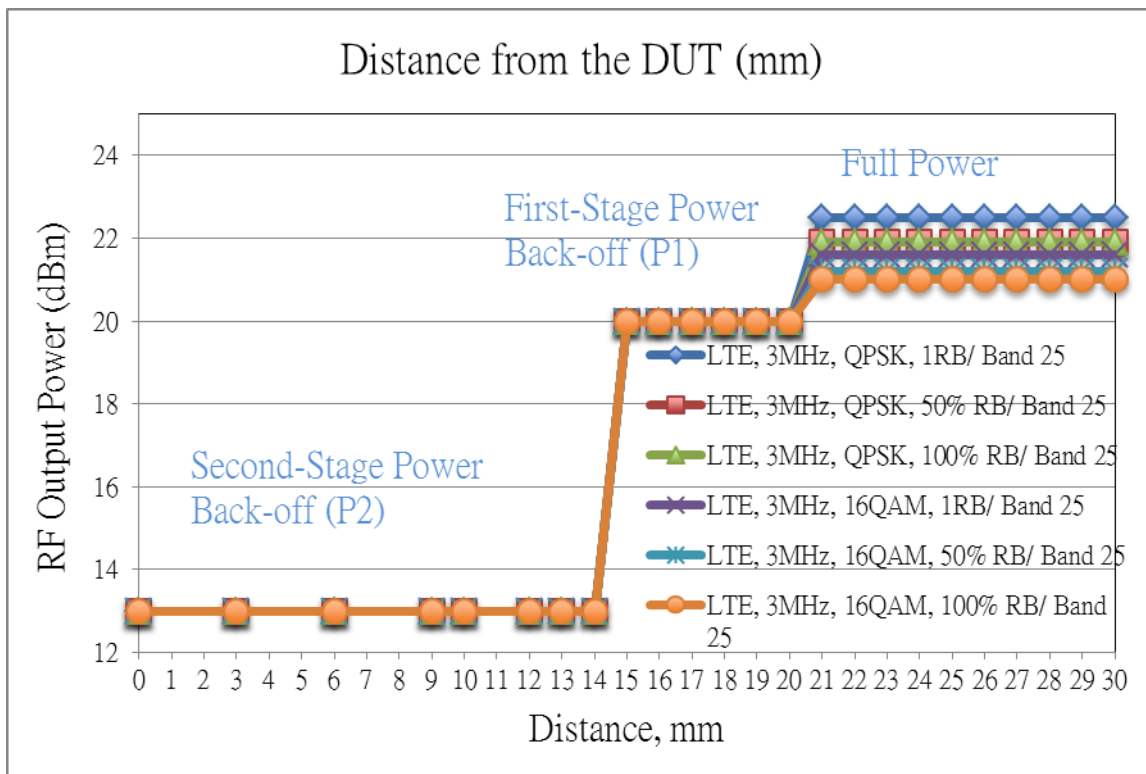

9. Exposure Conditions

Refer to Section 17 “Antenna Location and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

9.1. Body

For WiFi (Primary Antenna)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	6.47 mm	Yes	
Edge 1	181.3 mm	No	This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4) b) ii) (2)
Edge 2	93.5 mm	No	This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4) b) ii) (2)
Edge 3	3.4 mm	Yes	
Edge 4	9.8 mm	Yes	

For WiFi (Secondary Antenna)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	6.47 mm	Yes	
Edge 1	191.1 mm	No	This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4) b) ii) (2)
Edge 2	14.4 mm	Yes	
Edge 3	3.4 mm	Yes	
Edge 4	93.5 mm	No	This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4) b) ii) (2)

For WWAN and LTE (Primary Antenna)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1.7 mm	Yes	
Edge 1	2.1 mm	Yes	
Edge 1 Tilt 18 deg	1.95 mm	No	This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4) b) ii) (2)
Edge 2	24.8 mm	Yes	
Edge 3	185.1 mm	No	This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4) b) ii) (2)
Edge 4	64.1 mm	No	This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4) b) ii) (2)
Edge 1 and Edge 2 Tilt 40 deg	<25 mm	Yes	
Edge 2 Tilt 35 deg	<25 mm	Yes	

Notes:

- Edge 1 = Top Edge
- Edge 2 = Right Edge
- Edge 3 = Bottom Edge
- Edge 4 = Left Edge
- Edge 1 and Edge 2 Tilt 40 deg = Top-Edge/Right Corner Tilt 40 deg
- Edge 2 Tilt 35 deg = Right Edge Tilt 35 deg

10. RF Output Power Measurement

10.1. GSM850

Without Power Back-off

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
850	128	824.2	33.5	24.5	33.0	27.0
	190	836.6	33.5	24.5	33.0	27.0
	251	848.8	33.5	24.5	33.0	27.0

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
850	128	824.2	29.0	20.0	29.0	23.0
	190	836.6	29.0	20.0	29.0	23.0
	251	848.8	29.0	20.0	29.0	23.0

With Power Back-off

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)				Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr	1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
			Second-stage Power Back-off				First-Stage Power Back-off			
850	128	824.2	29.2	20.2	26.3	20.3	32.0	23.0	31.5	25.5
	190	836.6	29.2	20.2	26.3	20.3	32.0	23.0	31.5	25.5
	251	848.8	29.2	20.2	26.3	20.3	32.0	23.0	31.5	25.5

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)				Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr	1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
			Second-stage Power Back-off				First-Stage Power Back-off			
850	128	824.2	29.0	20.0	26.0	20.0	29.0	20.0	29.0	23.0
	190	836.6	29.0	20.0	26.0	20.0	29.0	20.0	29.0	23.0
	251	848.8	29.0	20.0	26.0	20.0	29.0	20.0	29.0	23.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) Mode because its output power is less than that of GPRS Mode

10.2. GSM1900

Without Power Back-off

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
1900	512	1850.2	30.0	21.0	29.4	23.4
	661	1880.0	30.0	21.0	29.5	23.5
	810	1909.8	29.9	20.9	29.5	23.5

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
1900	512	1850.2	28.0	19.0	28.0	22.0
	661	1880.0	28.0	19.0	28.0	22.0
	810	1909.8	28.0	19.0	28.0	22.0

With Power Back-off

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)				Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr	1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
			Second-stage Power Back-off				First-Stage Power Back-off			
1900	512	1850.2	23.3	14.3	20.5	14.5	29.3	20.3	26.5	20.5
	661	1880.0	23.3	14.3	20.5	14.5	29.3	20.3	26.5	20.5
	810	1909.8	23.3	14.3	20.5	14.5	29.3	20.3	26.5	20.5

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)				Avg burst Pwr (dBm)			
			1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr	1 slot	Frame Avg Pwr	2 slots	Frame Avg Pwr
			Second-stage Power Back-off				First-Stage Power Back-off			
1900	512	1850.2	23.3	14.3	20.4	14.4	28.0	19.0	26.4	20.4
	661	1880.0	23.3	14.3	20.4	14.4	28.0	19.0	26.4	20.4
	810	1909.8	23.3	14.3	20.4	14.4	28.0	19.0	26.4	20.4

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) Mode because its output power is less than that of GPRS Mode

10.3. W-CDMA Band V

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	24.5	17.3	23.0
		4183	836.6	24.5	17.3	23.0
		4233	846.6	24.5	17.3	23.0

HSDPA

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
CM (dB)	0	1	1.5	1.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
W-CDMA Band V	Subtest 1	4132	826.4	23.6	17.3	23.0
		4183	836.6	23.5	17.3	23.0
		4233	846.6	23.5	17.3	23.0
	Subtest 2	4132	826.4	23.7	17.3	23.0
		4183	836.6	23.7	17.3	23.0
		4233	846.6	23.5	17.3	23.0
	Subtest 3	4132	826.4	23.2	17.3	23.0
		4183	836.6	23.0	17.3	23.0
		4233	846.6	23.1	17.3	23.0
	Subtest 4	4132	826.4	23.2	17.3	23.0
		4183	836.6	23.0	17.3	23.0
		4233	846.6	23.1	17.3	23.0

Maximum output power levels that are possible for all subtests reported.

Note(s):

KDB 941225 D01 – Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is < 75% of the SAR limit.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15	56/75	134/15
	CM (dB)	1.0	3.0	2.0	3.0	1.0
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
W-CDMA Band V	Subtest 1	4132	826.4	23.4	17.3	23.0
		4183	836.6	23.6	17.3	23.0
		4233	846.6	23.7	17.3	23.0
	Subtest 2	4132	826.4	22.1	17.3	22.1
		4183	836.6	22.1	17.3	22.1
		4233	846.6	22.2	17.3	22.2
	Subtest 3	4132	826.4	22.8	17.3	22.8
		4183	836.6	22.9	17.3	22.9
		4233	846.6	22.8	17.3	22.8
	Subtest 4	4132	826.4	22.1	17.3	22.1
		4183	836.6	22.2	17.3	22.2
		4233	846.6	22.2	17.3	22.2
	Subtest 5	4132	826.4	23.6	17.3	23.0
		4183	836.6	23.7	17.3	23.0
		4233	846.6	23.7	17.3	23.0

Note(s):

KDB 941225 D01 – Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit.

DC-HSDPA (Rel 8, CAT 24)

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

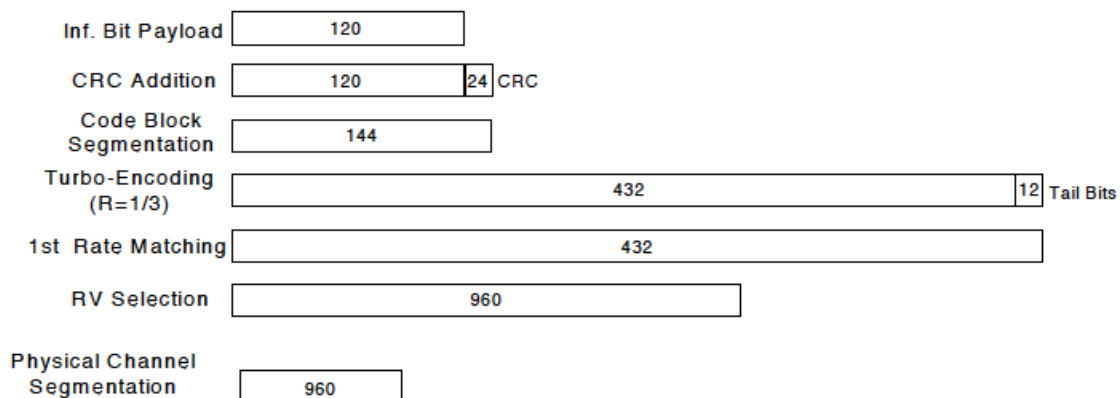


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	A _{hs} = β_{hs}/β_c	30/15			

Up commands are set continuously to set the UE to Max power.

Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
W-CDMA Band V	Subtest 1	4132	826.4	23.5	17.3	23.0
		4183	836.6	23.5	17.3	23.0
		4233	846.6	23.5	17.3	23.0
	Subtest 2	4132	826.4	23.5	17.3	23.0
		4183	836.6	23.5	17.3	23.0
		4233	846.6	23.5	17.3	23.0
	Subtest 3	4132	826.4	23.0	17.3	23.0
		4183	836.6	23.0	17.3	23.0
		4233	846.6	23.0	17.3	23.0
	Subtest 4	4132	826.4	23.0	17.3	23.0
		4183	836.6	23.0	17.3	23.0
		4233	846.6	23.0	17.3	23.0

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

10.4. W-CDMA Band II

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
W-CDMA (UMTS) Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	22.9	13.0	20.0
		9400	1880.0	23.0	13.0	20.0
		9538	1907.6	23.0	13.0	19.9

HSDPA

The following 4 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
CM (dB)	0	1	1.5	1.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
W-CDMA Band II	Subtest 1	9262	1852.4	22.9	13.0	20.0
		9400	1880.0	22.8	13.0	20.0
		9538	1907.6	22.8	13.0	20.0
	Subtest 2	9262	1852.4	23.0	13.0	20.0
		9400	1880.0	23.0	13.0	20.0
		9538	1907.6	22.8	13.0	20.0
	Subtest 3	9262	1852.4	22.6	13.0	20.0
		9400	1880.0	22.7	13.0	20.0
		9538	1907.6	22.7	13.0	20.0
	Subtest 4	9262	1852.4	22.6	13.0	20.0
		9400	1880.0	22.7	13.0	20.0
		9538	1907.6	22.6	13.0	20.0

Maximum output power levels that are possible for all subtests reported.

Note(s):

KDB 941225 D01 – Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is < 75% of the SAR limit.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15	56/75	134/15
CM (dB)	1.0	3.0	2.0	3.0	1.0	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
Ahs = β_{hs}/β_c	30/15					
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
W-CDMA Band II	Subtest 1	9262	1852.4	22.9	13.0	20.0
		9400	1880.0	22.9	13.0	20.0
		9538	1907.6	22.8	13.0	20.0
	Subtest 2	9262	1852.4	20.4	13.0	20.0
		9400	1880.0	20.5	13.0	20.0
		9538	1907.6	20.4	13.0	20.0
	Subtest 3	9262	1852.4	22.2	13.0	20.0
		9400	1880.0	22.1	13.0	20.0
		9538	1907.6	22.0	13.0	20.0
	Subtest 4	9262	1852.4	20.5	13.0	20.0
		9400	1880.0	20.5	13.0	20.0
		9538	1907.6	20.4	13.0	20.0
	Subtest 5	9262	1852.4	23.0	13.0	20.0
		9400	1880.0	22.9	13.0	20.0
		9538	1907.6	22.8	13.0	20.0

Note(s):

KDB 941225 D01 – Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit.

DC-HSDPA (Rel 8, CAT 24)

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

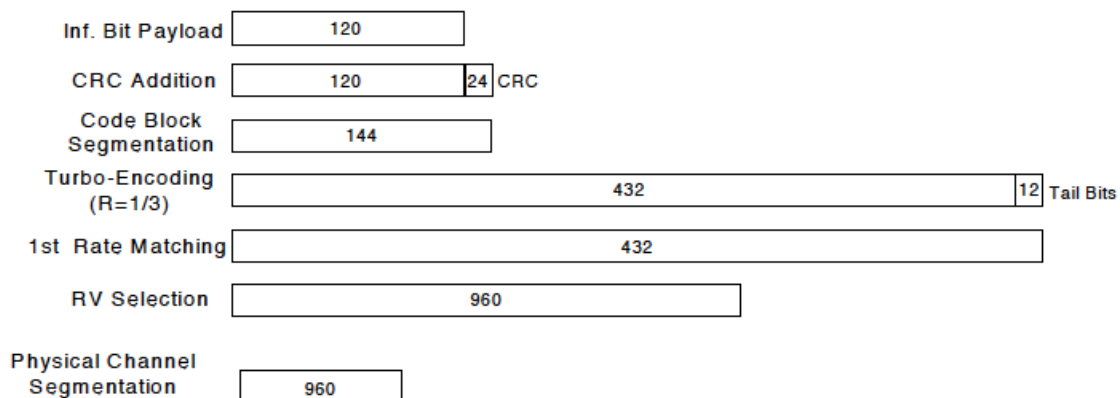


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR	0	0	0.5	0.5	
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	A _{hs} = β_{hs}/β_c	30/15			

Up commands are set continuously to set the UE to Max power.

Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
W-CDMA Band II	Subtest 1	9262	1852.4	22.9	13.0	20.0
		9400	1880.0	23.0	13.0	20.0
		9538	1907.6	23.0	13.0	20.0
	Subtest 2	9262	1852.4	23.0	13.0	20.0
		9400	1880.0	22.9	13.0	20.0
		9538	1907.6	22.9	13.0	20.0
	Subtest 3	9262	1852.4	22.7	13.0	20.0
		9400	1880.0	22.7	13.0	20.0
		9538	1907.6	22.6	13.0	20.0
	Subtest 4	9262	1852.4	22.6	13.0	20.0
		9400	1880.0	22.7	13.0	20.0
		9538	1907.6	22.6	13.0	20.0

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

10.5. CDMA BC0

1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 387 for BC0
 > Network ID (NID) > 65535
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
 > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
 - Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
BC 0	RC1 SO55 (Loopback)	1013	824.7	24.4	17.2	23.0
		384	836.52	24.5	17.3	22.9
		777	848.31	24.5	17.2	22.9
	RC3 SO55 (Loopback)	1013	824.7	24.4	17.2	23.0
		384	836.52	24.5	17.3	22.9
		777	848.31	24.5	17.2	22.9
	RC3 SO32 (+F-SCH))	1013	824.7	24.5	17.3	23.0
		384	836.52	24.5	17.3	23.0
		777	848.31	24.5	17.2	22.9

1xEV-Do Rel. 0

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	B.13.10, L

EVDO Release 0 - RTAPS

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -93 dBm/1.23 MHz
 - System ID: 7; NID: 1, Reg. Ch. #: 610 for BC0, 600 for BC1 & 500 for BC10
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -93 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	FTAP Rate	RTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)		
					Without Pwr Back-off	With Pwr Back-off	
						Second-stage	First-Stage
BC0	307.2 kbps (2 slot, QPSK)	153.6 kbps	1013	824.70	24.4	17.3	23.0
			384	836.52	24.5	17.3	23.0
			777	848.31	24.5	17.3	23.0

1xEV-DO Rev. A

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application	Rev. License
1xEV-DO Terminal Test	B.13.10, L
<u>EVDO Rev. A – RETAP</u>	

- Call Setup > Shift & Preset
- Cell Power > --93 and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -93, and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

Band	FETAP Traffic Format	RETAP Data Payload Size	Channel	f (MHz)	Avg Pwr (dBm)		
					Without Pwr Back-	With Pwr Back-off	
						Second-stage	First-Stage
BC0	307.2k, QPSK/ ACK channel is transmitted at all the slots	4096	1013	824.70	24.4	17.3	23.0
			384	836.52	24.5	17.3	23.0
			777	848.31	24.5	17.2	23.0

1xEV-Do Rev. B

This procedure assumes the Rohde & Schwarz CMW 500 CDMA Rev. B Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	V.2.1.25

1xEV-DO Release B –

- CMW 500 Signal Generator > 1xEV-DO Taskbar Enable
- CMW 500 1xEV-DO Signaling Configuration Window >
- 1xEV-DO Signaling On Window:
Under Access Network Control:
Band Class: BC0: US Cellular
RF Channel: 31
1xEV-DO Power: -70 dBm
Release B
- 1xEV-DO Signaling Configuration Window

Under RF Frequency Band / Channel: Enter Ch. Frequency

- Under Carrier Configuration: RF Frequency
For Two Carriers: Low Channel (1013)

	RF Channel	RF Channel Offset
Carrier [0]	31	0
Carrier [1]	1013	982

- Under Carrier Configuration: RF Pilot

	Carrier Sector	Active on AN	Assigned to AT
Pilot [0]	C0/S0	✓	✓
	CA/S1	✓	✓

For Three Carriers: Low Channel (1013)

	RF Channel	RF Channel Offset
Carrier [0]	72	0
Carrier [1]	31	-41
Carrier [2]	1013	941

- Under Carrier Configuration: RF Pilot

	Carrier Sector	Active on AN	Assigned to AT
Pilot [0]	C0/S0	✓	✓
Pilot [1]	C1/S1	✓	✓
Pilot [2]	C2/S2	✓	✓

- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

Two Carrier Mini Separation

Band	Test Set #	Channel	f (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
BC0	1	1013+31	824.70+825.93	21.4	17.3	21.4
		384+425	836.52+837.75	21.5	17.3	21.5
		736+777	847.08+848.31	21.4	17.3	21.4

Two Carrier Max Separation

Band	Test Set #	Channel	f (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
BC0	2	1013+156	824.70+829.68	21.5	17.3	21.5
		384+550	836.52+841.50	21.4	17.3	21.4
		611+777	843.33+848.31	21.4	17.2	21.4

Three Carrier Min Separation

Band	Test Set #	Channel	f (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
BC0	3	1013+31+72	824.70+825.93+827.16	21.0	17.3	21.0
		384+425+466	836.52+837.75+838.98	21.0	17.3	20.9
		695+736+777	845.85+847.08+848.31	21.0	17.3	21.0

10.6. CDMA BC1

Only Model A1455 supports EVDO Rev B in BC0 for 16QAM only. Device does not support simultaneous EV-DO Rev.B and voice. Device will use carriers as assigned by network. All channels are tested at max power without independent power control.

1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application	Rev, License
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 600 for BC1
 > Network ID (NID) > 65535
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
 > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
 - Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
BC 1	RC1 SO55 (Loopback)	25	1851.25	23.0	13.1	19.9
		600	1880.00	23.0	13.3	19.9
		1175	1908.75	22.8	13.0	20.0
	RC3 SO55 (Loopback)	25	1851.25	23.0	13.1	20.0
		600	1880.00	22.9	13.3	19.9
		1175	1908.75	22.8	13.0	19.9
	RC3 SO32 ((+F-SCH))	25	1851.25	23.0	13.2	19.9
		600	1880.00	23.0	13.3	20.0
		1175	1908.75	23.0	13.1	20.0

1xEV-Do Rel. 0

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	B.13.10, L

EVDO Release 0 - RTAPS

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -93 dBm/1.23 MHz
 - System ID: 7; NID: 1, Reg. Ch. #: 610 for BC0, 600 for BC1 & 500 for BC10
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -93 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	FTAP Rate	RTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)		
					Without Pwr Back-off	With Pwr Back-off	
						Second-stage	First-Stage
BC1	307.2 kbps (2 slot, QPSK)	153.6 kbps	25	1851.25	23.0	13.1	19.9
			600	1880.00	23.0	13.2	20.0
			1175	1908.75	23.0	13.1	19.9

1xEv-Do Rev. A

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	B.13.10, L

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > --93 and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -93, and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

Band	FETAP Traffic Format	RETAP Data Payload Size	Channel	f (MHz)	Avg Pwr (dBm)		
					Without Pwr Back-off	With Pwr Back-off	
						Second-stage	First-Stage
BC1	307.2k, QPSK/ ACK channel is transmitted at all the slots	4096	25	1851.25	23.0	13.0	19.9
			600	1880.00	23.0	13.2	20.0
			1175	1908.75	23.0	13.0	19.9

10.7. CDMA BC10

Only Model A1455 supports EVDO Rev B in BC0 for 16QAM only. Device does not support simultaneous EV-DO Rev.B and voice. Device will use carriers as assigned by network. All channels are tested at max power without independent power control.

1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application	Rev, License
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 580(BC10)
 > Network ID (NID) > 65535
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
 > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
 - Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)		
				Without Pwr Back-off	With Pwr Back-off	
					Second-stage	First-Stage
BC 10	RC1 SO55 (Loopback)	476	817.9	24.4	17.2	22.9
		580	820.5	24.4	17.3	23.0
		684	823.1	24.4	17.2	22.9
	RC3 SO55 (Loopback)	476	817.9	24.4	17.2	22.9
		580	820.5	24.4	17.3	23.0
		684	823.1	24.4	17.2	22.9
	RC3 SO32 ((+F-SCH))	476	817.9	24.4	17.3	23.0
		580	820.5	24.4	17.3	23.0
		684	823.1	24.5	17.3	23.0

1xEV-Do Rel. 0

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application	Rev. License
1xEV-DO Terminal Test	B.13.10, L

EVDO Release 0 - RTAPS

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -93 dBm/1.23 MHz
 - System ID: 7; NID: 1, Reg. Ch. #: 610 for BC0, 600 for BC1 & 500 for BC10
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -93 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	FTAP Rate	RTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)		
					Without Pwr Back-off	With Pwr Back-off	
						Second-stage	First-Stage
BC10	307.2 kbps (2 slot, QPSK)	153.6 kbps	476	817.9	24.4	17.3	23.0
			580	820.5	24.5	17.3	23.0
			684	823.1	24.5	17.3	23.0

10.8. LTE Band 5

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Results

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
10	20450	829.0	QPSK	1	0	0	24.0	16.9	22.5
				1	24	0	24.0	16.9	22.5
				1	49	0	23.8	17.0	22.3
				25	0	1	23.1	16.9	22.4
				25	12	1	23.2	17.0	22.5
				25	24	1	23.1	17.0	22.4
			16QAM	50	0	1	23.1	16.9	22.5
				1	0	1	23.0	16.9	22.5
				1	24	1	23.0	16.9	22.4
				1	49	1	23.0	16.9	22.4
				25	0	2	22.2	17.0	22.2
				25	12	2	22.2	17.0	22.2
	20525	836.5	QPSK	25	24	2	22.2	16.9	22.2
				50	0	2	22.2	16.9	22.2
				1	0	0	24.0	16.9	22.3
				1	24	0	24.0	17.0	22.5
				1	49	0	24.0	17.0	22.5
				25	0	1	22.8	17.0	22.5
			16QAM	25	12	1	23.0	17.0	22.4
				25	24	1	23.1	17.0	22.5
				50	0	1	23.1	17.0	22.5
				1	0	1	22.9	16.9	22.4
				1	24	1	23.0	16.9	22.4
				1	49	1	23.0	17.0	22.3
	20600	844.0	QPSK	25	0	2	22.2	17.0	22.2
				25	12	2	22.2	16.9	22.2
				25	24	2	22.2	17.0	22.2
				50	0	2	22.2	17.0	22.2
				1	0	0	24.0	17.0	22.5
				1	24	0	24.0	16.9	22.5
16QAM			1	49	0	23.9	16.9	22.4	
			25	0	1	23.1	16.9	22.4	
			25	12	1	23.2	17.0	22.5	
			25	24	1	23.1	16.9	22.4	
			50	0	1	23.1	16.9	22.5	
			1	0	1	23.0	16.9	22.5	
				1	24	1	23.0	17.0	22.5
				1	49	1	22.9	17.0	22.5
				25	0	2	22.2	17.0	22.2
				25	12	2	22.2	16.9	22.2
				25	24	2	22.2	16.9	22.2
				50	0	2	22.1	16.9	22.1

LTE Band 5 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
5	20425	826.5	QPSK	1	0	0	24.0	16.9	22.5
				1	12	0	24.0	16.9	22.5
				1	24	0	23.8	17.0	22.3
				12	0	1	23.1	16.9	22.4
				12	6	1	23.2	16.9	22.5
				12	11	1	23.1	17.0	22.4
			25	0	1	23.1	17.0	22.3	
			16QAM	1	0	1	23.0	16.9	22.4
				1	12	1	23.0	16.9	22.5
				1	24	1	23.0	16.9	22.4
				12	0	2	22.0	17.0	22.0
				12	6	2	22.0	17.0	22.0
	12	11		2	22.0	16.9	22.0		
	20525	836.5	QPSK	1	0	0	23.8	16.9	22.4
				1	12	0	24.0	17.0	22.5
				1	24	0	24.0	17.0	22.5
				12	0	1	22.8	17.0	22.5
				12	6	1	23.0	17.0	22.5
				12	11	1	23.1	17.0	22.5
			25	0	1	23.1	17.0	22.5	
			16QAM	1	0	1	22.9	16.9	22.5
				1	12	1	23.0	16.9	22.4
				1	24	1	23.0	17.0	22.3
				12	0	2	22.0	17.0	22.0
				12	6	2	22.0	17.0	22.0
	12	11		2	22.0	17.0	22.0		
	20625	846.5	QPSK	1	0	0	24.0	16.9	22.5
				1	12	0	24.0	17.0	22.5
				1	24	0	23.9	17.0	22.4
				12	0	1	23.1	16.9	22.4
12				6	1	23.0	17.0	22.5	
12				11	1	23.1	17.0	22.4	
25			0	1	23.1	17.0	22.5		
16QAM			1	0	1	23.0	16.9	22.5	
			1	12	1	23.0	17.0	22.5	
			1	24	1	22.9	17.0	22.5	
			12	0	2	22.1	16.9	22.1	
			12	6	2	22.1	16.9	22.1	
	12	11	2	22.1	16.9	22.1			
25	0	2	22.1	16.9	22.1				

LTE Band 5 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
3	20415	825.5	QPSK	1	0	0	24.0	16.9	22.5
				1	7	0	24.0	16.9	22.5
				1	14	0	24.0	17.0	22.3
				8	0	1	23.2	16.9	22.4
				8	4	1	23.2	17.0	22.5
				8	7	1	23.2	17.0	22.4
			16QAM	15	0	1	23.2	16.9	22.5
				1	0	1	23.1	16.9	22.5
				1	7	1	22.9	16.9	22.4
				1	14	1	22.9	16.9	22.4
				8	0	2	22.7	17.0	22.5
				8	4	2	22.7	17.0	22.5
	20525	836.5	QPSK	8	7	2	22.7	16.9	22.4
				15	0	2	22.4	16.9	22.4
				1	0	0	24.0	16.9	22.3
				1	7	0	24.0	17.0	22.5
				1	14	0	24.0	17.0	22.5
				8	0	1	23.2	17.0	22.5
			16QAM	8	4	1	23.2	17.0	22.4
				8	7	1	23.2	17.0	22.5
				15	0	1	23.1	17.0	22.5
				1	0	1	23.0	16.9	22.4
				1	7	1	23.0	16.9	22.4
				1	14	1	23.0	17.0	22.5
	20634	847.4	QPSK	8	0	2	22.5	17.0	22.4
				8	4	2	22.5	16.9	22.5
				8	7	2	22.5	17.0	22.5
				15	0	2	22.4	17.0	22.4
				1	0	0	23.8	17.0	22.5
				1	7	0	23.8	16.9	22.5
16QAM			1	14	0	23.8	16.9	22.4	
			8	0	1	23.1	16.9	22.4	
			8	4	1	23.1	17.0	22.5	
			8	7	1	23.1	16.9	22.4	
			15	0	1	23.0	16.9	22.5	
			1	0	1	22.7	16.9	22.5	
16QAM	1	7	1	22.7	17.0	22.5			
	1	14	1	22.7	17.0	22.5			
	8	0	2	22.5	17.0	22.5			
	8	4	2	22.5	16.9	22.5			
	8	7	2	22.5	16.9	22.5			
	15	0	2	22.1	16.9	22.1			

LTE Band 5 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
1.4	20407	824.7	QPSK	1	0	0	24.0	16.9	22.5
				1	2	0	24.0	16.9	22.5
				1	5	0	24.0	17.0	22.3
				3	0	0	23.9	16.9	22.4
				3	1	0	23.9	17.0	22.5
				3	2	0	23.9	17.0	22.4
			16QAM	6	0	1	23.0	16.9	22.5
				1	0	1	23.0	16.9	22.5
				1	2	1	23.0	16.9	22.4
				1	5	1	23.0	16.9	22.4
				3	0	1	23.3	17.0	22.5
				3	1	1	23.3	17.0	22.4
	20525	836.5	QPSK	3	2	1	23.3	16.9	22.4
				6	0	2	22.3	16.9	22.3
				1	0	0	24.0	16.9	22.3
				1	2	0	24.0	17.0	22.5
				1	5	0	24.0	17.0	22.5
				3	0	0	24.0	17.0	22.5
			16QAM	3	1	0	24.0	17.0	22.4
				3	2	0	24.0	17.0	22.5
				6	0	1	22.9	17.0	22.5
				1	0	1	23.0	16.9	22.4
				1	2	1	23.0	16.9	22.4
				1	5	1	23.0	17.0	22.3
	20642	848.2	QPSK	3	0	1	22.9	17.0	22.4
				3	1	1	22.9	16.9	22.4
				3	2	1	22.9	17.0	22.3
				6	0	2	22.1	17.0	22.1
				1	0	0	24.0	17.0	22.5
				1	2	0	24.0	16.9	22.5
16QAM			1	5	0	24.0	16.9	22.4	
			3	0	0	23.7	16.9	22.4	
			3	1	0	23.7	17.0	22.5	
			3	2	0	23.7	16.9	22.4	
			6	0	1	22.9	16.9	22.5	
			1	0	1	23.0	16.9	22.5	
16QAM	1	2	1	22.8	17.0	22.5			
	1	5	1	22.8	17.0	22.5			
	3	0	1	23.2	17.0	22.2			
	3	1	1	23.2	16.9	22.2			
	3	2	1	23.2	16.9	22.2			
	6	0	2	22.2	16.9	22.2			

10.9. LTE Band 13

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Band 13

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
10	23230	782.0	QPSK	1	0	0	24.0	18.0	22.5
				1	24	0	24.0	18.1	22.5
				1	49	0	24.0	18.1	22.5
				25	0	1	23.3	18.2	22.5
				25	12	1	23.4	18.3	22.5
				25	24	1	23.3	18.3	22.5
				50	0	1	23.3	18.0	22.5
			16QAM	1	0	1	23.1	18.0	22.5
				1	24	1	23.1	18.1	22.5
				1	49	1	23.0	18.0	22.4
				25	0	2	22.3	18.0	22.3
				25	12	2	22.2	18.0	22.2
				25	24	2	22.3	18.1	22.3
				50	0	2	22.3	18.1	22.3

LTE Band 13 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
5	23205	779.5	QPSK	1	0	0	24.0	17.9	22.5
				1	12	0	24.0	18.3	22.5
				1	24	0	24.0	17.9	22.4
				12	0	1	23.0	18.0	22.4
				12	6	1	23.1	18.0	22.5
				12	11	1	23.0	17.9	22.4
			25	0	1	22.9	18.2	22.5	
			16QAM	1	0	1	23.0	17.9	22.4
				1	12	1	22.9	18.0	22.5
				1	24	1	22.9	18.0	22.5
				12	0	2	22.0	17.9	22.0
				12	6	2	21.9	18.2	21.9
	12	11		2	21.9	17.9	21.9		
	23230	782.0	QPSK	1	0	0	24.0	18.0	22.5
				1	12	0	24.0	18.0	22.5
				1	24	0	24.0	17.9	22.4
				12	0	1	23.3	18.2	22.4
				12	6	1	23.4	17.9	22.5
				12	11	1	23.3	18.3	22.4
			25	0	1	23.3	17.9	22.5	
			16QAM	1	0	1	23.1	18.0	22.5
				1	12	1	23.1	18.1	22.5
				1	24	1	23.0	18.0	22.4
				12	0	2	22.3	18.0	22.3
				12	6	2	22.2	18.0	22.2
	12	11		2	22.3	17.9	22.3		
	23255	784.5	QPSK	1	0	0	24.0	18.0	22.4
				1	12	0	23.7	18.0	22.5
				1	24	0	23.7	17.9	22.5
				12	0	1	23.0	18.2	22.4
12				6	1	22.9	17.9	22.5	
12				11	1	22.9	18.3	22.5	
25			0	1	22.8	17.9	22.4		
16QAM			1	0	1	23.0	18.0	22.4	
			1	12	1	22.9	17.9	22.4	
			1	24	1	22.9	18.1	22.5	
			12	0	2	21.8	18.0	21.8	
			12	6	2	21.7	18.0	21.7	
	12	11	2	21.8	17.9	21.8			
25	0	2	21.9	18.0	21.9				

10.10. LTE Band 25

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Results

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
20	26140	1860.0	QPSK	1	0	0	22.9	12.9	19.9
				1	49	0	23.0	13.0	20.0
				1	99	0	22.8	12.8	19.8
				50	0	1	21.9	12.8	19.9
				50	24	1	22.1	12.9	20.0
				50	49	1	21.9	12.8	19.9
			100	0	1	22.1	13.0	20.0	
			16QAM	1	0	1	22.0	13.0	20.0
				1	49	1	21.9	12.8	19.8
				1	99	1	21.9	12.8	19.9
				50	0	2	21.0	12.9	20.0
				50	24	2	21.1	12.9	20.0
	50	49		2	21.0	12.8	20.0		
	26365	1882.5	QPSK	1	0	0	23.0	12.9	20.0
				1	49	0	23.0	12.9	20.0
				1	99	0	23.0	13.0	20.0
				50	0	1	22.0	12.9	20.0
				50	24	1	22.1	13.0	20.0
				50	49	1	22.1	12.9	19.9
			100	0	1	22.2	12.9	20.0	
			16QAM	1	0	1	22.0	12.8	20.0
				1	49	1	22.0	12.9	19.9
				1	99	1	22.0	12.8	20.0
				50	0	2	21.0	13.0	20.0
				50	24	2	21.0	13.0	19.8
	50	49		2	21.0	12.8	19.9		
	26590	1905.0	QPSK	1	0	0	22.9	12.9	20.0
				1	49	0	22.9	12.8	19.9
				1	99	0	23.0	13.0	20.0
				50	0	1	22.0	12.9	19.9
50				24	1	22.1	13.0	20.0	
50				49	1	22.0	12.9	19.9	
100			0	1	22.1	12.9	19.9		
16QAM			1	0	1	22.0	13.0	19.9	
			1	49	1	22.0	12.8	20.0	
			1	99	1	22.0	13.0	19.9	
			50	0	2	20.8	12.9	20.0	
			50	24	2	20.7	12.8	20.0	
	50	49	2	20.9	13.0	19.8			
100	0	2	21.1	12.9	20.0				

LTE Band 25 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
15	26115	1857.5	QPSK	1	0	0	22.6	12.9	19.9
				1	37	0	22.5	12.8	20.0
				1	74	0	22.5	13.0	20.0
				38	0	1	22.0	13.0	19.8
				38	18	1	22.0	12.8	20.0
				38	37	1	21.9	12.8	20.0
			75	0	1	21.9	12.9	19.8	
			16QAM	1	0	1	22.0	12.9	19.9
				1	37	1	22.0	12.8	20.0
				1	74	1	22.0	12.8	20.0
				38	0	2	20.9	12.9	19.9
				38	18	2	20.9	12.9	20.0
	38	37		2	20.9	12.8	20.0		
	26365	1882.5	QPSK	1	0	0	22.8	12.9	20.0
				1	37	0	22.8	12.8	20.0
				1	74	0	22.9	13.0	20.0
				38	0	1	22.0	12.9	20.0
				38	18	1	22.1	12.9	20.0
				38	37	1	22.1	13.0	20.0
			75	0	1	22.2	12.9	20.0	
			16QAM	1	0	1	21.8	12.9	20.0
				1	37	1	21.8	12.8	19.8
				1	74	1	21.9	13.0	19.9
				38	0	2	21.0	12.9	20.0
				38	18	2	21.0	12.9	20.0
	38	37		2	21.1	13.0	19.9		
	26615	1907.5	QPSK	1	0	0	23.0	13.0	20.0
				1	37	0	23.0	12.9	20.0
				1	74	0	22.7	12.9	20.0
				38	0	1	22.1	13.0	20.0
38				18	1	22.1	12.8	20.0	
38				37	1	22.1	13.0	20.0	
75			0	1	22.1	12.9	20.0		
16QAM			1	0	1	21.6	13.0	20.0	
			1	37	1	21.6	12.8	20.0	
			1	74	1	21.3	13.0	19.9	
			38	0	2	21.1	12.9	20.0	
			38	18	2	21.2	12.8	20.0	
	38	37	2	21.1	13.0	19.8			
75	0	2	21.2	12.9	20.0				

LTE Band 25 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
10	26090	1855.0	QPSK	1	0	0	22.7	13.0	19.9
				1	24	0	22.7	13.0	20.0
				1	49	0	22.7	12.8	20.0
				25	0	1	21.6	12.8	19.9
				25	12	1	21.7	12.9	20.0
				25	24	1	21.8	12.9	20.0
			16QAM	50	0	1	21.7	12.8	20.0
				1	0	1	21.4	12.8	20.0
				1	24	1	21.3	12.9	20.0
				1	49	1	21.2	12.9	20.0
				25	0	2	20.8	12.8	20.0
				25	12	2	21.0	12.8	20.0
	26365	1882.5	QPSK	25	24	2	20.9	12.8	20.0
				50	0	2	20.7	12.8	20.0
				1	0	0	22.4	12.9	20.0
				1	24	0	22.4	12.8	19.8
				1	49	0	22.5	13.0	20.0
				25	0	1	21.8	12.9	20.0
			16QAM	25	12	1	21.8	12.9	20.0
				25	24	1	21.8	13.0	19.8
				50	0	1	21.9	12.9	19.9
				1	0	1	21.5	13.0	20.0
				1	24	1	21.5	12.9	20.0
				1	49	1	21.6	12.9	19.9
	26640	1910.0	QPSK	25	0	2	21.0	13.0	20.0
				25	12	2	20.9	12.8	20.0
				25	24	2	21.0	13.0	20.0
				50	0	2	21.0	12.9	20.0
				1	0	0	22.7	12.8	20.0
				1	24	0	22.9	13.0	20.0
16QAM			1	49	0	22.7	12.9	20.0	
			25	0	1	22.0	13.0	20.0	
			25	12	1	22.1	12.8	20.0	
			25	24	1	22.0	13.0	20.0	
			50	0	1	22.1	12.9	19.9	
			1	0	1	22.0	13.0	20.0	
16QAM	1	24	1	22.0	12.8	20.0			
	1	49	1	22.0	13.0	19.9			
	25	0	2	21.1	12.9	20.0			
	25	12	2	21.2	12.8	20.0			
	25	24	2	21.1	13.0	19.8			
	50	0	2	21.1	12.9	20.0			

LTE Band 25 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
5	26065	1852.5	QPSK	1	0	0	22.6	12.9	20.0
				1	12	0	22.6	12.8	20.0
				1	24	0	22.6	12.8	20.0
				12	0	1	21.7	12.9	20.0
				12	6	1	21.7	12.9	20.0
				12	11	1	21.7	12.8	19.8
			25	0	1	21.6	12.8	20.0	
			16QAM	1	0	1	22.1	12.8	20.0
				1	12	1	22.1	12.8	20.0
				1	24	1	22.1	13.0	19.8
				12	0	2	20.8	12.9	19.9
				12	6	2	20.8	12.8	20.0
	12	11		2	20.8	13.0	20.0		
	26365	1882.5	QPSK	1	0	0	22.6	13.0	20.0
				1	12	0	22.6	12.8	20.0
				1	24	0	22.6	13.0	20.0
				12	0	1	21.8	12.9	20.0
				12	6	1	21.9	12.9	20.0
				12	11	1	21.9	13.0	20.0
			25	0	1	21.9	12.9	20.0	
			16QAM	1	0	1	21.4	13.0	20.0
				1	12	1	21.4	12.9	20.0
				1	24	1	21.4	12.9	19.9
				12	0	2	20.9	12.9	20.0
				12	6	2	20.9	13.0	20.0
	12	11		2	21.0	12.8	20.0		
	26665	1912.5	QPSK	1	0	0	22.9	12.9	20.0
				1	12	0	22.8	13.0	20.0
				1	24	0	22.7	12.8	20.0
				12	0	1	22.0	13.0	20.0
12				6	1	21.9	12.9	20.0	
12				11	1	21.9	13.0	20.0	
25			0	1	21.9	12.9	19.9		
16QAM			1	0	1	22.4	13.0	20.0	
			1	12	1	22.3	12.8	20.0	
			1	24	1	22.1	13.0	20.0	
			12	0	2	21.3	12.9	20.0	
			12	6	2	21.2	12.8	20.0	
	12	11	2	21.1	13.0	20.0			
25	0	2	21.0	12.9	20.0				

LTE Band 25 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
3	26055	1851.5	QPSK	1	0	0	23.0	13.0	20.0
				1	7	0	23.0	12.9	20.0
				1	14	0	23.0	12.8	19.9
				8	0	1	22.1	13.0	20.0
				8	4	1	22.1	12.9	20.0
				8	7	1	22.1	13.0	20.0
				15	0	1	22.1	12.8	20.0
			16QAM	1	0	1	22.0	13.0	20.0
				1	7	1	22.0	12.9	20.0
				1	14	1	22.0	12.9	20.0
				8	0	2	21.8	13.0	20.0
				8	4	2	21.8	12.8	20.0
				8	7	2	21.8	13.0	19.9
				15	0	2	21.2	12.9	20.0
				26365	1882.5	QPSK	1	0	0
	1	7	0				22.9	13.0	20.0
	1	14	0				22.9	12.9	20.0
	8	0	1				21.9	13.0	20.0
	8	4	1				21.9	12.9	20.0
	8	7	1				21.9	12.9	20.0
	15	0	1				21.9	12.9	20.0
	16QAM	1	0			1	21.6	13.0	20.0
		1	7			1	21.6	13.0	20.0
		1	14			1	21.6	12.9	19.9
		8	0			2	21.4	13.0	20.0
		8	4			2	21.4	12.8	20.0
		8	7			2	21.4	13.0	20.0
		15	0			2	21.0	12.9	20.0
		26674	1913.4			QPSK	1	0	0
	1			7	0		22.7	12.9	20.0
1	14			0	22.7		13.0	20.0	
8	0			1	21.9		12.8	20.0	
8	4			1	21.9		12.9	20.0	
8	7			1	21.9		13.0	20.0	
15	0			1	21.9		12.9	20.0	
16QAM	1			0	1	22.0	13.0	20.0	
	1			7	1	21.5	12.8	20.0	
	1			14	1	21.5	13.0	20.0	
	8			0	2	21.0	12.9	20.0	
	8			4	2	21.0	12.8	20.0	
	8			7	2	21.0	13.0	19.9	
	15			0	2	21.0	12.9	20.0	

LTE Band 25 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)		
							Without Pwr Back-off	With Pwr Back-off	
								Second-stage	First-Stage
1.4	26047	1850.7	QPSK	1	0	0	23.0	13.0	20.0
				1	2	0	23.0	12.9	20.0
				1	5	0	22.9	12.9	20.0
				3	0	0	22.9	13.0	20.0
				3	1	0	22.9	12.8	20.0
				3	2	0	22.9	12.9	20.0
			16QAM	6	0	1	22.0	13.0	20.0
				1	0	1	22.1	12.9	20.0
				1	2	1	22.4	12.9	20.0
				1	5	1	22.4	13.0	20.0
				3	0	1	21.9	12.9	20.0
				3	1	1	21.9	13.0	20.0
	26365	1882.5	QPSK	3	2	1	21.9	12.9	20.0
				6	0	2	21.2	12.9	20.0
				1	0	0	23.0	12.9	20.0
				1	2	0	23.0	12.9	20.0
				1	5	0	23.0	13.0	20.0
				3	0	0	22.8	13.0	20.0
			16QAM	3	1	0	22.8	12.9	20.0
				3	2	0	22.8	13.0	20.0
				6	0	1	21.8	12.8	20.0
				1	0	1	21.8	13.0	20.0
				1	2	1	21.8	13.0	20.0
				1	5	1	21.8	12.8	20.0
	26682	1914.2	QPSK	3	0	1	22.1	13.0	20.0
				3	1	1	22.1	12.9	20.0
				3	2	1	22.1	13.0	19.9
				6	0	2	21.1	12.9	20.0
				1	0	0	22.6	13.0	20.0
				1	2	0	22.6	13.0	20.0
16QAM			1	5	0	22.6	12.9	20.0	
			3	0	0	21.7	13.0	20.0	
			3	1	0	22.6	12.9	20.0	
			3	2	0	22.6	13.0	20.0	
			6	0	1	21.7	12.8	20.0	
			1	0	1	22.0	12.9	20.0	
16QAM	1	2	1	22.1	12.8	20.0			
	1	5	1	22.1	12.9	20.0			
	3	0	1	22.0	13.0	20.0			
	3	1	1	22.0	12.9	20.0			
	3	2	1	22.0	13.0	19.9			
	6	0	2	21.0	12.9	20.0			

10.11. WiFi (2.4 GHz Band)

There are three Bill of Material variations of the Wi-Fi/Bluetooth Radio to support the production volumes of the device. The three BOM variants are:

- BOM # 1
- BOM # 2
- BOM # 3

The Wi-Fi/BT SKUs share the same Wi-Fi/Bluetooth chipset, have the same mechanical outline (e.g., the same dimension package and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform the same specifications and to operate within the same tolerances.

Complete SAR evaluation is performed on the BOM # 1 that has the highest SAR, and then, the test is repeated for the other BOM variants at the highest peak SAR value.

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	∇
		2.437	6	√	∇
		2.462	11 [#]	√	∇

Notes:

√ = "default test channels"

∇ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Band (MHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	
				Primary	Secondary
2.4	802.11b	1	2412	15.9	15.9
		6	2437	16.0	16.0
		11	2462	16.0	16.0
	802.11g	1	2412	16.0	16.0
		6	2437	15.9	15.9
		11	2462	16.0	15.9
	802.11n (HT20)	1	2412	16.0	15.9
		6	2437	16.0	16.0
		11	2462	15.9	16.0

Note(s):

SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels. As per KDB 248227

10.12. WiFi (5 GHz Bands)

Required Test Channels per KDB 248227 D01

Mode		Band	GHz	Channel	"Default Test Channels"	
					802.11a	
802.11a	UNII (15.407)	5.2 GHz	5.180	36	√	
			5.200	40		*
			2.220	44		*
			5.240	48	√	
		5.3 GHz	5.260	52	√	
			5.280	56		*
			5.300	60		*
			5.320	64	√	
		5.5 GHz	5.500	100		
			5.520	104	√	
			5.540	108		*
			5.560	112		*
			5.580	116	√	
			5.600	120		*
	5.620		124	√		
	5.640		128		*	
	5.660		132		*	
	5.680		136	√		
	5.700		140		*	
	DTS (15.247)		5.8 GHz	5.745	149	√
5.765		153			*	
5.785		157		√		
5.805		161			*	
5.825		165		√		

√ = "default test channels"

* = possible 802.11a channels with maximum average output > the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Band (MHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	
				Primary	Secondary
5.2	802.11a	36	5180	14.0	14.0
		40	5200	13.9	14.0
		44	5220	13.9	13.9
		48	5240	13.9	13.9
	802.11n (HT20)	36	5180	13.9	14.0
		40	5200	13.9	13.9
		48	5240	13.9	13.9
	802.11n (HT40)	38	5190	12.0	12.0
46		5230	15.5	15.5	
5.3	802.11a	52	5260	16.9	17.0
		56	5280	16.9	16.9
		60	5300	16.9	16.9
		64	5320	16.0	15.9
	802.11n (HT20)	52	5260	16.9	17.0
		60	5300	16.9	16.9
		64	5320	15.9	16.0
	802.11n (HT40)	54	5270	17.0	16.9
		62	5310	11.9	11.9
5.5	802.11a	100	5500	15.5	15.5
		104	5520	16.0	16.0
		108	5540	15.9	15.9
		112	5560	15.9	15.9
		116	5580	15.9	16.0
		120	5600	15.9	15.9
		124	5620	16.0	16.0
		128	5640	16.0	16.0
		132	5660	16.0	16.0
		136	5680	16.0	16.0
	140	5700	15.5	15.5	
	802.11n (HT20)	100	5500	15.5	15.5
		104	5520	16.0	15.9
		116	5580	15.9	15.9
		136	5680	16.0	16.0
		140	5700	14.5	14.5
	802.11n (HT40)	102	5510	12.5	12.5
		110	5550	16.0	16.0
		134	5670	16.0	16.0
	5.8	802.11a	149	5745	15.9
153			5765	15.9	15.9
157			5785	15.9	16.0
161			5805	15.9	15.9
165			5825	16.0	16.0
802.11n (HT20)		149	5745	16.0	16.0
		157	5785	16.0	16.0
		165	5825	16.0	15.9
802.11n (HT40)		151	5755	16.0	15.9
		159	5795	15.9	15.9

Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels. As per KDB 248227

10.13. Bluetooth

Mode	Channel #	Freq. (MHz)	Conducted Avg Power	
			(dBm)	(mW)
V2.1 + EDR, GFSK	0	2402	11.8	15.14
	39	2441	12.0	15.85
	78	2480	11.9	15.49
V2.1 + EDR, $\pi/4$ DQPSK	0	2402	9.5	8.91
	39	2441	9.3	8.51
	78	2480	9.4	8.71
V2.1 + EDR, 8-DPSK	0	2402	9.0	7.94
	39	2441	9.5	8.91
	78	2480	9.5	8.91
V4.0 LE, GFSK	0	2402	7.9	6.17
	19	2440	7.8	6.03
	39	2480	7.8	6.03

11. Tissue Dielectric Properties

IEEE Std 1528-2003 Table 2

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC OET Bulletin 65 Supplement C 01-01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

11.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride Sugar: 98+% Pure Sucrose
 Water: De-ionized, 16 MΩ+ resistivity HEC: Hydroxyethyl Cellulose
 DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

MSL/HSL750 (Body and Head liquids for 700 – 800 MHz)

Item	Head Tissue Simulation Liquids HSL750 Muscle (body) Tissue Simulation Liquids MSL750
Type No	SL AAH 075
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H ² O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40-60%
NaCl	Sodium Chloride, 0-6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1-0.7%

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

11.2. Tissue Dielectric Parameter Check Results

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Room A

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
8/14/2012	Body 5180	e'	48.2465	Relative Permittivity (ϵ_r):	48.25	49.05	-1.63	10	
		e"	18.5287	Conductivity (σ):	5.34	5.27	1.24	5	
	Body 5200	e'	48.2196	Relative Permittivity (ϵ_r):	48.22	49.02	-1.63	10	
		e"	18.4492	Conductivity (σ):	5.33	5.29	0.75	5	
	Body 5500	e'	47.6249	Relative Permittivity (ϵ_r):	47.62	48.61	-2.03	10	
		e"	18.7309	Conductivity (σ):	5.73	5.64	1.48	5	
	Body 5800	e'	47.1676	Relative Permittivity (ϵ_r):	47.17	48.20	-2.14	10	
		e"	19.0745	Conductivity (σ):	6.15	6.00	2.52	5	
	Body 5825	e'	47.3040	Relative Permittivity (ϵ_r):	47.30	48.20	-1.86	10	
		e"	18.8947	Conductivity (σ):	6.12	6.00	2.00	5	
	8/15/2012	Body 5180	e'	48.5995	Relative Permittivity (ϵ_r):	48.60	49.05	-0.91	10
			e"	18.3943	Conductivity (σ):	5.30	5.27	0.50	5
Body 5200		e'	48.4594	Relative Permittivity (ϵ_r):	48.46	49.02	-1.14	10	
		e"	18.3836	Conductivity (σ):	5.32	5.29	0.39	5	
Body 5500		e'	48.1153	Relative Permittivity (ϵ_r):	48.12	48.61	-1.02	10	
		e"	18.5137	Conductivity (σ):	5.66	5.64	0.31	5	
Body 5800		e'	47.4977	Relative Permittivity (ϵ_r):	47.50	48.20	-1.46	10	
		e"	18.6150	Conductivity (σ):	6.00	6.00	0.06	5	
Body 5825		e'	47.5856	Relative Permittivity (ϵ_r):	47.59	48.20	-1.27	10	
		e"	18.7032	Conductivity (σ):	6.06	6.00	0.96	5	
8/16/2012		Body 5180	e'	48.7118	Relative Permittivity (ϵ_r):	48.71	49.05	-0.68	10
			e"	18.7163	Conductivity (σ):	5.39	5.27	2.26	5
	Body 5200	e'	48.6713	Relative Permittivity (ϵ_r):	48.67	49.02	-0.71	10	
		e"	18.7227	Conductivity (σ):	5.41	5.29	2.24	5	
	Body 5500	e'	48.2723	Relative Permittivity (ϵ_r):	48.27	48.61	-0.70	10	
		e"	18.8955	Conductivity (σ):	5.78	5.64	2.38	5	
	Body 5800	e'	47.7244	Relative Permittivity (ϵ_r):	47.72	48.20	-0.99	10	
		e"	18.9997	Conductivity (σ):	6.13	6.00	2.12	5	
	Body 5825	e'	47.6267	Relative Permittivity (ϵ_r):	47.63	48.20	-1.19	10	
		e"	19.0521	Conductivity (σ):	6.17	6.00	2.85	5	
	8/17/2012	Body 5180	e'	47.9306	Relative Permittivity (ϵ_r):	47.93	49.05	-2.28	10
			e"	18.5457	Conductivity (σ):	5.34	5.27	1.33	5
Body 5200		e'	47.8616	Relative Permittivity (ϵ_r):	47.86	49.02	-2.36	10	
		e"	18.6181	Conductivity (σ):	5.38	5.29	1.67	5	
Body 5500		e'	47.4940	Relative Permittivity (ϵ_r):	47.49	48.61	-2.30	10	
		e"	18.6422	Conductivity (σ):	5.70	5.64	1.00	5	
Body 5800		e'	47.0629	Relative Permittivity (ϵ_r):	47.06	48.20	-2.36	10	
		e"	18.8077	Conductivity (σ):	6.07	6.00	1.09	5	
Body 5825		e'	46.8756	Relative Permittivity (ϵ_r):	46.88	48.20	-2.75	10	
		e"	18.7591	Conductivity (σ):	6.08	6.00	1.26	5	

Tissue Dielectric Parameter Check Results (continued)
SAR Room A

Date	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)
8/20/2012	Body 5180	e'	47.8111	Relative Permittivity (ϵ_r):	47.81	49.05	-2.52	10
		e"	18.0955	Conductivity (σ):	5.21	5.27	-1.13	5
	Body 5200	e'	47.8668	Relative Permittivity (ϵ_r):	47.87	49.02	-2.35	10
		e"	18.3031	Conductivity (σ):	5.29	5.29	-0.05	5
	Body 5500	e'	47.3897	Relative Permittivity (ϵ_r):	47.39	48.61	-2.52	10
		e"	18.5210	Conductivity (σ):	5.66	5.64	0.35	5
	Body 5800	e'	46.9527	Relative Permittivity (ϵ_r):	46.95	48.20	-2.59	10
		e"	18.7964	Conductivity (σ):	6.06	6.00	1.03	5
	Body 5825	e'	46.9368	Relative Permittivity (ϵ_r):	46.94	48.20	-2.62	10
		e"	18.7242	Conductivity (σ):	6.06	6.00	1.08	5
8/29/2012	Body 5180	e'	47.2989	Relative Permittivity (ϵ_r):	47.30	49.05	-3.56	10
		e"	18.2366	Conductivity (σ):	5.25	5.27	-0.36	5
	Body 5200	e'	47.2609	Relative Permittivity (ϵ_r):	47.26	49.02	-3.59	10
		e"	18.2402	Conductivity (σ):	5.27	5.29	-0.39	5
	Body 5500	e'	46.7409	Relative Permittivity (ϵ_r):	46.74	48.61	-3.85	10
		e"	18.4620	Conductivity (σ):	5.65	5.64	0.03	5
	Body 5800	e'	46.3113	Relative Permittivity (ϵ_r):	46.31	48.20	-3.92	10
		e"	18.8161	Conductivity (σ):	6.07	6.00	1.14	5
	Body 5825	e'	46.3338	Relative Permittivity (ϵ_r):	46.33	48.20	-3.87	10
		e"	18.7420	Conductivity (σ):	6.07	6.00	1.17	5
9/5/2012	Body 2450	e'	50.8651	Relative Permittivity (ϵ_r):	50.87	52.70	-3.48	5
		e"	14.0522	Conductivity (σ):	1.91	1.95	-1.83	5
	Body 2410	e'	50.9890	Relative Permittivity (ϵ_r):	50.99	52.76	-3.36	5
		e"	13.8909	Conductivity (σ):	1.86	1.91	-2.41	5
	Body 2435	e'	50.9818	Relative Permittivity (ϵ_r):	50.98	52.73	-3.31	5
		e"	13.9931	Conductivity (σ):	1.89	1.93	-1.89	5
	Body 2475	e'	50.7789	Relative Permittivity (ϵ_r):	50.78	52.67	-3.59	5
		e"	14.1619	Conductivity (σ):	1.95	1.99	-1.82	5
9/6/2012	Body 2450	e'	50.7704	Relative Permittivity (ϵ_r):	50.77	52.70	-3.66	5
		e"	14.1683	Conductivity (σ):	1.93	1.95	-1.02	5
	Body 2410	e'	50.9272	Relative Permittivity (ϵ_r):	50.93	52.76	-3.47	5
		e"	13.9886	Conductivity (σ):	1.87	1.91	-1.73	5
	Body 2435	e'	50.8207	Relative Permittivity (ϵ_r):	50.82	52.73	-3.61	5
		e"	14.0969	Conductivity (σ):	1.91	1.93	-1.16	5
	Body 2475	e'	50.7079	Relative Permittivity (ϵ_r):	50.71	52.67	-3.72	5
		e"	14.2785	Conductivity (σ):	1.96	1.99	-1.02	5
9/6/2012	Body 700	e'	56.2434	Relative Permittivity (ϵ_r):	56.24	55.74	0.91	5
		e"	23.6705	Conductivity (σ):	0.92	0.96	-3.95	5
	Body 710	e'	56.1446	Relative Permittivity (ϵ_r):	56.14	55.70	0.80	5
		e"	23.5724	Conductivity (σ):	0.93	0.96	-3.06	5
	Body 750	e'	55.7761	Relative Permittivity (ϵ_r):	55.78	55.55	0.41	5
		e"	23.1898	Conductivity (σ):	0.97	0.96	0.41	5
9/7/2012	Body 700	e'	56.3658	Relative Permittivity (ϵ_r):	56.37	55.74	1.13	5
		e"	23.6142	Conductivity (σ):	0.92	0.96	-4.18	5
	Body 710	e'	56.2698	Relative Permittivity (ϵ_r):	56.27	55.70	1.02	5
		e"	23.5067	Conductivity (σ):	0.93	0.96	-3.33	5
	Body 750	e'	55.8992	Relative Permittivity (ϵ_r):	55.90	55.55	0.64	5
		e"	23.1304	Conductivity (σ):	0.96	0.96	0.16	5

Tissue Dielectric Parameter Check Results (continued)
SAR Room A

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
9/10/2012	Body 750	e'	53.9211	Relative Permittivity (ϵ_r):	53.92	55.55	-2.93	5
		e"	22.4881	Conductivity (σ):	0.94	0.96	-2.62	5
	Body 775	e'	53.5346	Relative Permittivity (ϵ_r):	53.53	55.45	-3.45	5
		e"	22.2504	Conductivity (σ):	0.96	0.97	-0.64	5
	Body 780	e'	53.6186	Relative Permittivity (ϵ_r):	53.62	55.43	-3.27	5
		e"	22.1881	Conductivity (σ):	0.96	0.97	-0.32	5
Body 790	e'	53.4038	Relative Permittivity (ϵ_r):	53.40	55.39	-3.59	5	
	e"	22.1746	Conductivity (σ):	0.97	0.97	0.82	5	
9/11/2012	Body 750	e'	54.3139	Relative Permittivity (ϵ_r):	54.31	55.55	-2.22	5
		e"	22.5117	Conductivity (σ):	0.94	0.96	-2.52	5
	Body 775	e'	54.0175	Relative Permittivity (ϵ_r):	54.02	55.45	-2.58	5
		e"	22.3051	Conductivity (σ):	0.96	0.97	-0.40	5
	Body 780	e'	53.9582	Relative Permittivity (ϵ_r):	53.96	55.43	-2.66	5
		e"	22.2677	Conductivity (σ):	0.97	0.97	0.04	5
Body 790	e'	53.8452	Relative Permittivity (ϵ_r):	53.85	55.39	-2.79	5	
	e"	22.2007	Conductivity (σ):	0.98	0.97	0.94	5	

Tissue Dielectric Parameter Check Results (continued)
SAR Room B

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
8/6/2012	Body 5180	e'	50.3505	Relative Permittivity (ϵ_r):	50.35	49.05	2.66	10	
		e"	18.5802	Conductivity (σ):	5.35	5.27	1.52	5	
	Body 5200	e'	50.3299	Relative Permittivity (ϵ_r):	50.33	49.02	2.67	10	
		e"	18.7169	Conductivity (σ):	5.41	5.29	2.21	5	
	Body 5500	e'	49.6953	Relative Permittivity (ϵ_r):	49.70	48.61	2.23	10	
		e"	18.9396	Conductivity (σ):	5.79	5.64	2.62	5	
	Body 5800	e'	49.1173	Relative Permittivity (ϵ_r):	49.12	48.20	1.90	10	
		e"	19.2398	Conductivity (σ):	6.20	6.00	3.41	5	
	Body 5825	e'	49.1851	Relative Permittivity (ϵ_r):	49.19	48.20	2.04	10	
		e"	19.2203	Conductivity (σ):	6.23	6.00	3.75	5	
	8/7/2012	Body 5180	e'	49.3549	Relative Permittivity (ϵ_r):	49.35	49.05	0.63	10
			e"	18.4870	Conductivity (σ):	5.32	5.27	1.01	5
Body 5200		e'	49.3064	Relative Permittivity (ϵ_r):	49.31	49.02	0.59	10	
		e"	18.5200	Conductivity (σ):	5.35	5.29	1.14	5	
Body 5500		e'	48.7311	Relative Permittivity (ϵ_r):	48.73	48.61	0.24	10	
		e"	18.9555	Conductivity (σ):	5.80	5.64	2.70	5	
Body 5800		e'	48.1185	Relative Permittivity (ϵ_r):	48.12	48.20	-0.17	10	
		e"	19.2494	Conductivity (σ):	6.21	6.00	3.46	5	
Body 5825		e'	48.0361	Relative Permittivity (ϵ_r):	48.04	48.20	-0.34	10	
		e"	19.3698	Conductivity (σ):	6.27	6.00	4.56	5	
8/8/2012		Body 5180	e'	48.8628	Relative Permittivity (ϵ_r):	48.86	49.05	-0.37	10
			e"	18.3911	Conductivity (σ):	5.30	5.27	0.49	5
	Body 5200	e'	48.8719	Relative Permittivity (ϵ_r):	48.87	49.02	-0.30	10	
		e"	18.4319	Conductivity (σ):	5.33	5.29	0.65	5	
	Body 5500	e'	48.3374	Relative Permittivity (ϵ_r):	48.34	48.61	-0.57	10	
		e"	18.8451	Conductivity (σ):	5.76	5.64	2.10	5	
	Body 5800	e'	47.7311	Relative Permittivity (ϵ_r):	47.73	48.20	-0.97	10	
		e"	18.9198	Conductivity (σ):	6.10	6.00	1.69	5	
	Body 5825	e'	47.5038	Relative Permittivity (ϵ_r):	47.50	48.20	-1.44	10	
		e"	18.9680	Conductivity (σ):	6.14	6.00	2.39	5	
	8/9/2012	Body 5180	e'	50.1412	Relative Permittivity (ϵ_r):	50.14	49.05	2.23	10
			e"	17.6598	Conductivity (σ):	5.09	5.27	-3.51	5
Body 5200		e'	50.1077	Relative Permittivity (ϵ_r):	50.11	49.02	2.22	10	
		e"	17.5405	Conductivity (σ):	5.07	5.29	-4.21	5	
Body 5500		e'	49.6400	Relative Permittivity (ϵ_r):	49.64	48.61	2.11	10	
		e"	17.9349	Conductivity (σ):	5.48	5.64	-2.83	5	
Body 5800		e'	49.1484	Relative Permittivity (ϵ_r):	49.15	48.20	1.97	10	
		e"	18.1093	Conductivity (σ):	5.84	6.00	-2.66	5	
Body 5825		e'	49.1677	Relative Permittivity (ϵ_r):	49.17	48.20	2.01	10	
		e"	18.1718	Conductivity (σ):	5.89	6.00	-1.91	5	
8/10/2012		Body 5180	e'	48.0484	Relative Permittivity (ϵ_r):	48.05	49.05	-2.04	10
			e"	17.4752	Conductivity (σ):	5.03	5.27	-4.52	5
	Body 5200	e'	48.1015	Relative Permittivity (ϵ_r):	48.10	49.02	-1.87	10	
		e"	17.4428	Conductivity (σ):	5.04	5.29	-4.75	5	
	Body 5500	e'	47.6570	Relative Permittivity (ϵ_r):	47.66	48.61	-1.97	10	
		e"	17.7340	Conductivity (σ):	5.42	5.64	-3.92	5	
	Body 5800	e'	47.1026	Relative Permittivity (ϵ_r):	47.10	48.20	-2.28	10	
		e"	17.8650	Conductivity (σ):	5.76	6.00	-3.98	5	
	Body 5825	e'	49.1207	Relative Permittivity (ϵ_r):	49.12	48.20	1.91	10	
		e"	17.9714	Conductivity (σ):	5.82	6.00	-2.99	5	

Tissue Dielectric Parameter Check Results (continued)
SAR Room B

Date	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)
8/13/2012	Body 5180	e'	48.5028	Relative Permittivity (ϵ_r):	48.50	49.05	-1.11	10
		e"	18.2468	Conductivity (σ):	5.26	5.27	-0.30	5
	Body 5200	e'	48.3370	Relative Permittivity (ϵ_r):	48.34	49.02	-1.39	10
		e"	18.3525	Conductivity (σ):	5.31	5.29	0.22	5
	Body 5500	e'	47.8479	Relative Permittivity (ϵ_r):	47.85	48.61	-1.57	10
		e"	18.5103	Conductivity (σ):	5.66	5.64	0.29	5
	Body 5800	e'	47.4264	Relative Permittivity (ϵ_r):	47.43	48.20	-1.60	10
		e"	18.6197	Conductivity (σ):	6.00	6.00	0.08	5
	Body 5825	e'	47.4995	Relative Permittivity (ϵ_r):	47.50	48.20	-1.45	10
		e"	18.5146	Conductivity (σ):	6.00	6.00	-0.06	5
8/14/2012	Body 5180	e'	49.0752	Relative Permittivity (ϵ_r):	49.08	49.05	0.06	10
		e"	17.7595	Conductivity (σ):	5.12	5.27	-2.96	5
	Body 5200	e'	49.0160	Relative Permittivity (ϵ_r):	49.02	49.02	-0.01	10
		e"	17.8327	Conductivity (σ):	5.16	5.29	-2.62	5
	Body 5500	e'	48.5035	Relative Permittivity (ϵ_r):	48.50	48.61	-0.23	10
		e"	17.9545	Conductivity (σ):	5.49	5.64	-2.72	5
	Body 5800	e'	48.1823	Relative Permittivity (ϵ_r):	48.18	48.20	-0.04	10
		e"	18.2509	Conductivity (σ):	5.89	6.00	-1.90	5
	Body 5825	e'	48.0949	Relative Permittivity (ϵ_r):	48.09	48.20	-0.22	10
		e"	18.2699	Conductivity (σ):	5.92	6.00	-1.38	5
8/15/2012	Body 5180	e'	48.0595	Relative Permittivity (ϵ_r):	48.06	49.05	-2.01	10
		e"	18.1991	Conductivity (σ):	5.24	5.27	-0.56	5
	Body 5200	e'	47.9316	Relative Permittivity (ϵ_r):	47.93	49.02	-2.22	10
		e"	18.2833	Conductivity (σ):	5.29	5.29	-0.16	5
	Body 5500	e'	47.5440	Relative Permittivity (ϵ_r):	47.54	48.61	-2.20	10
		e"	18.5148	Conductivity (σ):	5.66	5.64	0.31	5
	Body 5800	e'	47.0569	Relative Permittivity (ϵ_r):	47.06	48.20	-2.37	10
		e"	18.8771	Conductivity (σ):	6.09	6.00	1.46	5
	Body 5825	e'	46.9506	Relative Permittivity (ϵ_r):	46.95	48.20	-2.59	10
		e"	18.8884	Conductivity (σ):	6.12	6.00	1.96	5
8/16/2012	Body 5180	e'	49.2839	Relative Permittivity (ϵ_r):	49.28	49.05	0.48	10
		e"	18.6913	Conductivity (σ):	5.38	5.27	2.13	5
	Body 5200	e'	49.2187	Relative Permittivity (ϵ_r):	49.22	49.02	0.41	10
		e"	18.6436	Conductivity (σ):	5.39	5.29	1.81	5
	Body 5500	e'	48.7253	Relative Permittivity (ϵ_r):	48.73	48.61	0.23	10
		e"	18.9824	Conductivity (σ):	5.81	5.64	2.85	5
	Body 5800	e'	48.1800	Relative Permittivity (ϵ_r):	48.18	48.20	-0.04	10
		e"	19.1824	Conductivity (σ):	6.19	6.00	3.10	5
	Body 5825	e'	48.1298	Relative Permittivity (ϵ_r):	48.13	48.20	-0.15	10
		e"	19.1786	Conductivity (σ):	6.21	6.00	3.53	5
8/17/2012	Body 5180	e'	49.1557	Relative Permittivity (ϵ_r):	49.16	49.05	0.22	10
		e"	18.4435	Conductivity (σ):	5.31	5.27	0.77	5
	Body 5200	e'	49.1739	Relative Permittivity (ϵ_r):	49.17	49.02	0.31	10
		e"	18.5103	Conductivity (σ):	5.35	5.29	1.08	5
	Body 5500	e'	48.7362	Relative Permittivity (ϵ_r):	48.74	48.61	0.25	10
		e"	18.7274	Conductivity (σ):	5.73	5.64	1.47	5
	Body 5800	e'	48.1285	Relative Permittivity (ϵ_r):	48.13	48.20	-0.15	10
		e"	19.0461	Conductivity (σ):	6.14	6.00	2.37	5
	Body 5825	e'	47.9493	Relative Permittivity (ϵ_r):	47.95	48.20	-0.52	10
		e"	19.0401	Conductivity (σ):	6.17	6.00	2.78	5

Tissue Dielectric Parameter Check Results (continued)
SAR Room B

Date	Freq. (MHz)		Liquid Parameters	Measured	Target	Delta (%)	Limit ±(%)	
8/20/2012	Body 5180	e'	47.7515	Relative Permittivity (ϵ_r):	47.75	49.05	-2.64	10
		e"	18.1913	Conductivity (σ):	5.24	5.27	-0.60	5
	Body 5200	e'	47.8549	Relative Permittivity (ϵ_r):	47.85	49.02	-2.38	10
		e"	18.4420	Conductivity (σ):	5.33	5.29	0.71	5
	Body 5500	e'	47.2314	Relative Permittivity (ϵ_r):	47.23	48.61	-2.84	10
		e"	18.6035	Conductivity (σ):	5.69	5.64	0.79	5
	Body 5800	e'	46.7722	Relative Permittivity (ϵ_r):	46.77	48.20	-2.96	10
		e"	18.9938	Conductivity (σ):	6.13	6.00	2.09	5
	Body 5825	e'	46.7596	Relative Permittivity (ϵ_r):	46.76	48.20	-2.99	10
		e"	19.0485	Conductivity (σ):	6.17	6.00	2.83	5
8/27/2012	Body 835	e'	53.3674	Relative Permittivity (ϵ_r):	53.37	55.20	-3.32	5
		e"	21.0651	Conductivity (σ):	0.98	0.97	0.83	5
	Body 815	e'	53.5587	Relative Permittivity (ϵ_r):	53.56	55.30	-3.14	5
		e"	21.1226	Conductivity (σ):	0.96	0.97	-1.12	5
	Body 820	e'	53.5131	Relative Permittivity (ϵ_r):	53.51	55.28	-3.19	5
		e"	21.1024	Conductivity (σ):	0.96	0.97	-0.65	5
	Body 850	e'	53.2269	Relative Permittivity (ϵ_r):	53.23	55.16	-3.50	5
		e"	21.0269	Conductivity (σ):	0.99	0.99	0.67	5
9/5/2012	Body 835	e'	56.6498	Relative Permittivity (ϵ_r):	56.65	55.20	2.63	5
		e"	21.7124	Conductivity (σ):	1.01	0.97	3.93	5
	Body 815	e'	56.8127	Relative Permittivity (ϵ_r):	56.81	55.30	2.74	5
		e"	21.7954	Conductivity (σ):	0.99	0.97	2.03	5
	Body 820	e'	56.7746	Relative Permittivity (ϵ_r):	56.77	55.28	2.71	5
		e"	21.7747	Conductivity (σ):	0.99	0.97	2.51	5
	Body 850	e'	56.5454	Relative Permittivity (ϵ_r):	56.55	55.16	2.52	5
		e"	21.6431	Conductivity (σ):	1.02	0.99	3.62	5
9/6/2012	Body 835	e'	54.2319	Relative Permittivity (ϵ_r):	54.23	55.20	-1.75	5
		e"	21.2573	Conductivity (σ):	0.99	0.97	1.75	5
	Body 815	e'	54.5905	Relative Permittivity (ϵ_r):	54.59	55.30	-1.28	5
		e"	21.3688	Conductivity (σ):	0.97	0.97	0.03	5
	Body 820	e'	54.3846	Relative Permittivity (ϵ_r):	54.38	55.28	-1.61	5
		e"	21.2930	Conductivity (σ):	0.97	0.97	0.25	5
	Body 850	e'	54.0603	Relative Permittivity (ϵ_r):	54.06	55.16	-1.99	5
		e"	21.0714	Conductivity (σ):	1.00	0.99	0.89	5
9/7/2012	Body 835	e'	53.1694	Relative Permittivity (ϵ_r):	53.17	55.20	-3.68	5
		e"	21.3448	Conductivity (σ):	0.99	0.97	2.17	5
	Body 815	e'	53.3771	Relative Permittivity (ϵ_r):	53.38	55.30	-3.47	5
		e"	21.4118	Conductivity (σ):	0.97	0.97	0.23	5
	Body 820	e'	53.3184	Relative Permittivity (ϵ_r):	53.32	55.28	-3.54	5
		e"	21.3955	Conductivity (σ):	0.98	0.97	0.73	5
	Body 850	e'	53.0147	Relative Permittivity (ϵ_r):	53.01	55.16	-3.88	5
		e"	21.2973	Conductivity (σ):	1.01	0.99	1.97	5
9/10/2012	Body 835	e'	52.7522	Relative Permittivity (ϵ_r):	52.75	55.20	-4.43	5
		e"	21.0652	Conductivity (σ):	0.98	0.97	0.83	5
	Body 820	e'	53.0207	Relative Permittivity (ϵ_r):	53.02	55.28	-4.08	5
		e"	20.9760	Conductivity (σ):	0.96	0.97	-1.25	5
	Body 830	e'	52.9646	Relative Permittivity (ϵ_r):	52.96	55.24	-4.12	5
		e"	20.9944	Conductivity (σ):	0.97	0.97	-0.03	5
	Body 850	e'	52.6393	Relative Permittivity (ϵ_r):	52.64	55.16	-4.56	5
		e"	20.9240	Conductivity (σ):	0.99	0.99	0.18	5

Tissue Dielectric Parameter Check Results (continued)
SAR Room B

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
9/11/2012	Body 835	e'	53.6930	Relative Permittivity (ϵ_r):	53.69	55.20	-2.73	5
		e''	20.9577	Conductivity (σ):	0.97	0.97	0.31	5
	Body 820	e'	53.7931	Relative Permittivity (ϵ_r):	53.79	55.28	-2.68	5
		e''	21.0055	Conductivity (σ):	0.96	0.97	-1.11	5
	Body 830	e'	53.7225	Relative Permittivity (ϵ_r):	53.72	55.24	-2.74	5
		e''	20.9732	Conductivity (σ):	0.97	0.97	-0.13	5
Body 850	e'	53.5680	Relative Permittivity (ϵ_r):	53.57	55.16	-2.88	5	
	e''	20.9173	Conductivity (σ):	0.99	0.99	0.15	5	
9/17/2012	Body 835	e'	54.3297	Relative Permittivity (ϵ_r):	54.33	55.20	-1.58	5
		e''	21.6054	Conductivity (σ):	1.00	0.97	3.41	5
	Body 820	e'	54.4795	Relative Permittivity (ϵ_r):	54.48	55.28	-1.44	5
		e''	21.6459	Conductivity (σ):	0.99	0.97	1.91	5
	Body 830	e'	54.3774	Relative Permittivity (ϵ_r):	54.38	55.24	-1.56	5
		e''	21.6201	Conductivity (σ):	1.00	0.97	2.95	5
Body 850	e'	54.1755	Relative Permittivity (ϵ_r):	54.18	55.16	-1.78	5	
	e''	21.5571	Conductivity (σ):	1.02	0.99	3.21	5	
9/18/2012	Body 835	e'	54.8345	Relative Permittivity (ϵ_r):	54.83	55.20	-0.66	5
		e''	20.9499	Conductivity (σ):	0.97	0.97	0.28	5
	Body 820	e'	55.0569	Relative Permittivity (ϵ_r):	55.06	55.28	-0.40	5
		e''	21.1927	Conductivity (σ):	0.97	0.97	-0.23	5
	Body 830	e'	54.6821	Relative Permittivity (ϵ_r):	54.68	55.24	-1.01	5
		e''	21.0008	Conductivity (σ):	0.97	0.97	0.00	5
Body 850	e'	54.8736	Relative Permittivity (ϵ_r):	54.87	55.16	-0.51	5	
	e''	20.8447	Conductivity (σ):	0.99	0.99	-0.20	5	

Tissue Dielectric Parameter Check Results (continued)
SAR Room C

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit \pm (%)		
8/2/2012	Body 5180	e'	50.1754	Relative Permittivity (ϵ_r):	50.18	49.05	2.30	10	
		e''	18.6554	Conductivity (σ):	5.37	5.27	1.93	5	
	Body 5200	e'	50.2335	Relative Permittivity (ϵ_r):	50.23	49.02	2.48	10	
		e''	18.7091	Conductivity (σ):	5.41	5.29	2.17	5	
	Body 5500	e'	49.7657	Relative Permittivity (ϵ_r):	49.77	48.61	2.37	10	
		e''	18.9954	Conductivity (σ):	5.81	5.64	2.92	5	
	Body 5800	e'	49.1958	Relative Permittivity (ϵ_r):	49.20	48.20	2.07	10	
		21	19.1512	Conductivity (σ):	6.18	6.00	2.94	5	
	Body 5825	e'	49.1038	Relative Permittivity (ϵ_r):	49.10	48.20	1.88	10	
		e''	19.2658	Conductivity (σ):	6.24	6.00	4.00	5	
	8/3/2012	Body 5180	e'	50.6250	Relative Permittivity (ϵ_r):	50.63	49.05	3.22	10
			e''	18.3096	Conductivity (σ):	5.27	5.27	0.04	5
Body 5200		e'	50.5250	Relative Permittivity (ϵ_r):	50.53	49.02	3.07	10	
		e''	18.3198	Conductivity (σ):	5.30	5.29	0.04	5	
Body 5500		e'	49.9786	Relative Permittivity (ϵ_r):	49.98	48.61	2.81	10	
		e''	18.6691	Conductivity (σ):	5.71	5.64	1.15	5	
Body 5800		e'	49.6193	Relative Permittivity (ϵ_r):	49.62	48.20	2.94	10	
		21	18.9052	Conductivity (σ):	6.10	6.00	1.61	5	
Body 5825		e'	49.5981	Relative Permittivity (ϵ_r):	49.60	48.20	2.90	10	
		e''	19.0181	Conductivity (σ):	6.16	6.00	2.66	5	
8/6/2012		Body 5180	e'	49.4070	Relative Permittivity (ϵ_r):	49.41	49.05	0.73	10
			e''	18.3091	Conductivity (σ):	5.27	5.27	0.04	5
	Body 5200	e'	49.5240	Relative Permittivity (ϵ_r):	49.52	49.02	1.03	10	
		e''	18.3926	Conductivity (σ):	5.32	5.29	0.44	5	
	Body 5500	e'	48.9430	Relative Permittivity (ϵ_r):	48.94	48.61	0.68	10	
		e''	18.5751	Conductivity (σ):	5.68	5.64	0.64	5	
	Body 5800	e'	48.4399	Relative Permittivity (ϵ_r):	48.44	48.20	0.50	10	
		21	18.9092	Conductivity (σ):	6.10	6.00	1.64	5	
	Body 5825	e'	48.4224	Relative Permittivity (ϵ_r):	48.42	48.20	0.46	10	
		e''	18.7377	Conductivity (σ):	6.07	6.00	1.15	5	
	8/7/2012	Body 5180	e'	50.0938	Relative Permittivity (ϵ_r):	50.09	49.05	2.13	10
			e''	18.0259	Conductivity (σ):	5.19	5.27	-1.51	5
Body 5200		e'	50.0489	Relative Permittivity (ϵ_r):	50.05	49.02	2.10	10	
		e''	18.0519	Conductivity (σ):	5.22	5.29	-1.42	5	
Body 5500		e'	49.4898	Relative Permittivity (ϵ_r):	49.49	48.61	1.80	10	
		e''	18.4526	Conductivity (σ):	5.64	5.64	-0.02	5	
Body 5800		e'	48.9295	Relative Permittivity (ϵ_r):	48.93	48.20	1.51	10	
		21	18.7275	Conductivity (σ):	6.04	6.00	0.66	5	
Body 5825		e'	48.8403	Relative Permittivity (ϵ_r):	48.84	48.20	1.33	10	
		e''	18.8618	Conductivity (σ):	6.11	6.00	1.82	5	
8/8/2012		Body 5180	e'	48.8382	Relative Permittivity (ϵ_r):	48.84	49.05	-0.43	10
			e''	18.6552	Conductivity (σ):	5.37	5.27	1.93	5
	Body 5200	e'	48.8041	Relative Permittivity (ϵ_r):	48.80	49.02	-0.44	10	
		e''	18.6890	Conductivity (σ):	5.40	5.29	2.06	5	
	Body 5500	e'	48.2451	Relative Permittivity (ϵ_r):	48.25	48.61	-0.76	10	
		e''	19.0079	Conductivity (σ):	5.81	5.64	2.99	5	
	Body 5800	e'	47.7518	Relative Permittivity (ϵ_r):	47.75	48.20	-0.93	10	
		e''	19.3213	Conductivity (σ):	6.23	6.00	3.85	5	
	Body 5825	e'	47.6913	Relative Permittivity (ϵ_r):	47.69	48.20	-1.06	10	
		e''	19.3452	Conductivity (σ):	6.27	6.00	4.43	5	

Tissue Dielectric Parameter Check Results (continued)
SAR Room C

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
8/9/2012	Body 5180	e'	50.6505	Relative Permittivity (ϵ_r):	50.65	49.05	3.27	10
		e"	18.5131	Conductivity (σ):	5.33	5.27	1.15	5
	Body 5200	e'	50.7573	Relative Permittivity (ϵ_r):	50.76	49.02	3.54	10
		e"	18.4001	Conductivity (σ):	5.32	5.29	0.48	5
	Body 5500	e'	50.2265	Relative Permittivity (ϵ_r):	50.23	48.61	3.32	10
		e"	18.8221	Conductivity (σ):	5.76	5.64	1.98	5
	Body 5800	e'	49.5784	Relative Permittivity (ϵ_r):	49.58	48.20	2.86	10
		e"	19.1053	Conductivity (σ):	6.16	6.00	2.69	5
	Body 5825	e'	49.7488	Relative Permittivity (ϵ_r):	49.75	48.20	3.21	10
		e"	19.2240	Conductivity (σ):	6.23	6.00	3.77	5
8/10/2012	Body 5180	e'	50.6616	Relative Permittivity (ϵ_r):	50.66	49.05	3.29	10
		e"	18.5124	Conductivity (σ):	5.33	5.27	1.15	5
	Body 5200	e'	50.7758	Relative Permittivity (ϵ_r):	50.78	49.02	3.58	10
		e"	18.5459	Conductivity (σ):	5.36	5.29	1.28	5
	Body 5500	e'	50.2002	Relative Permittivity (ϵ_r):	50.20	48.61	3.26	10
		e"	18.7610	Conductivity (σ):	5.74	5.64	1.65	5
	Body 5800	e'	49.6879	Relative Permittivity (ϵ_r):	49.69	48.20	3.09	10
		e"	19.0538	Conductivity (σ):	6.14	6.00	2.41	5
	Body 5825	e'	49.6407	Relative Permittivity (ϵ_r):	49.64	48.20	2.99	10
		e"	19.1026	Conductivity (σ):	6.19	6.00	3.12	5
8/13/2012	Body 5180	e'	48.0072	Relative Permittivity (ϵ_r):	48.01	49.05	-2.12	10
		e"	19.0712	Conductivity (σ):	5.49	5.27	4.20	5
	Body 5200	e'	47.9843	Relative Permittivity (ϵ_r):	47.98	49.02	-2.11	10
		e"	19.0098	Conductivity (σ):	5.50	5.29	3.81	5
	Body 5500	e'	47.3566	Relative Permittivity (ϵ_r):	47.36	48.61	-2.58	10
		e"	19.2492	Conductivity (σ):	5.89	5.64	4.29	5
	Body 5800	e'	46.8841	Relative Permittivity (ϵ_r):	46.88	48.20	-2.73	10
		e"	19.4430	Conductivity (σ):	6.27	6.00	4.51	5
	Body 5825	e'	46.9549	Relative Permittivity (ϵ_r):	46.95	48.20	-2.58	10
		e"	19.3493	Conductivity (σ):	6.27	6.00	4.45	5
8/14/2012	Body 2450	e'	51.7921	Relative Permittivity (ϵ_r):	51.79	52.70	-1.72	5
		e"	14.2409	Conductivity (σ):	1.94	1.95	-0.51	5
	Body 2410	e'	51.9321	Relative Permittivity (ϵ_r):	51.93	52.76	-1.57	5
		e"	14.1021	Conductivity (σ):	1.89	1.91	-0.93	5
	Body 2435	e'	51.8417	Relative Permittivity (ϵ_r):	51.84	52.73	-1.68	5
		e"	14.1868	Conductivity (σ):	1.92	1.93	-0.53	5
	Body 2475	e'	51.7143	Relative Permittivity (ϵ_r):	51.71	52.67	-1.81	5
		e"	14.3417	Conductivity (σ):	1.97	1.99	-0.58	5
8/14/2012	Body 5180	e'	49.1518	Relative Permittivity (ϵ_r):	49.15	49.05	0.21	10
		e"	18.3560	Conductivity (σ):	5.29	5.27	0.30	5
	Body 5200	e'	49.0101	Relative Permittivity (ϵ_r):	49.01	49.02	-0.02	10
		e"	18.3938	Conductivity (σ):	5.32	5.29	0.45	5
	Body 5500	e'	48.5548	Relative Permittivity (ϵ_r):	48.55	48.61	-0.12	10
		e"	18.5777	Conductivity (σ):	5.68	5.64	0.65	5
	Body 5800	e'	48.2517	Relative Permittivity (ϵ_r):	48.25	48.20	0.11	10
		e"	18.8030	Conductivity (σ):	6.06	6.00	1.07	5
	Body 5825	e'	48.1728	Relative Permittivity (ϵ_r):	48.17	48.20	-0.06	10
		e"	18.8948	Conductivity (σ):	6.12	6.00	2.00	5

Tissue Dielectric Parameter Check Results (continued)
SAR Room C

Date	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)
8/15/2012	Body 5180	e'	48.5995	Relative Permittivity (ϵ_r):	48.60	49.05	-0.91	10
		e"	18.3943	Conductivity (σ):	5.30	5.27	0.50	5
	Body 5200	e'	48.4594	Relative Permittivity (ϵ_r):	48.46	49.02	-1.14	10
		e"	18.3836	Conductivity (σ):	5.32	5.29	0.39	5
	Body 5500	e'	48.1153	Relative Permittivity (ϵ_r):	48.12	48.61	-1.02	10
		e"	18.5137	Conductivity (σ):	5.66	5.64	0.31	5
	Body 5800	e'	47.4977	Relative Permittivity (ϵ_r):	47.50	48.20	-1.46	10
		e"	18.6150	Conductivity (σ):	6.00	6.00	0.06	5
	Body 5825	e'	47.5856	Relative Permittivity (ϵ_r):	47.59	48.20	-1.27	10
		e"	18.7032	Conductivity (σ):	6.06	6.00	0.96	5
8/15/2012	Body 2450	e'	51.7454	Relative Permittivity (ϵ_r):	51.75	52.70	-1.81	5
		e"	14.3203	Conductivity (σ):	1.95	1.95	0.04	5
	Body 2410	e'	51.8113	Relative Permittivity (ϵ_r):	51.81	52.76	-1.80	5
		e"	14.1058	Conductivity (σ):	1.89	1.91	-0.90	5
	Body 2435	e'	51.7429	Relative Permittivity (ϵ_r):	51.74	52.73	-1.87	5
		e"	14.3036	Conductivity (σ):	1.94	1.93	0.29	5
	Body 2475	e'	51.6605	Relative Permittivity (ϵ_r):	51.66	52.67	-1.91	5
		e"	14.4150	Conductivity (σ):	1.98	1.99	-0.07	5
8/16/2012	Body 5180	e'	48.4064	Relative Permittivity (ϵ_r):	48.41	49.05	-1.31	10
		e"	18.6560	Conductivity (σ):	5.37	5.27	1.93	5
	Body 5200	e'	48.3425	Relative Permittivity (ϵ_r):	48.34	49.02	-1.38	10
		e"	18.5963	Conductivity (σ):	5.38	5.29	1.55	5
	Body 5500	e'	47.9376	Relative Permittivity (ϵ_r):	47.94	48.61	-1.39	10
		e"	18.7508	Conductivity (σ):	5.73	5.64	1.59	5
	Body 5800	e'	47.3793	Relative Permittivity (ϵ_r):	47.38	48.20	-1.70	10
		e"	18.9161	Conductivity (σ):	6.10	6.00	1.67	5
	Body 5825	e'	47.3125	Relative Permittivity (ϵ_r):	47.31	48.20	-1.84	10
		e"	18.9128	Conductivity (σ):	6.13	6.00	2.09	5
8/16/2012	Body 2450	e'	52.2979	Relative Permittivity (ϵ_r):	52.30	52.70	-0.76	5
		e"	14.6373	Conductivity (σ):	1.99	1.95	2.26	5
	Body 2410	e'	52.3673	Relative Permittivity (ϵ_r):	52.37	52.76	-0.74	5
		e"	14.3715	Conductivity (σ):	1.93	1.91	0.96	5
	Body 2435	e'	52.3166	Relative Permittivity (ϵ_r):	52.32	52.73	-0.78	5
		e"	14.4953	Conductivity (σ):	1.96	1.93	1.63	5
	Body 2475	e'	52.1746	Relative Permittivity (ϵ_r):	52.17	52.67	-0.94	5
		e"	14.6164	Conductivity (σ):	2.01	1.99	1.33	5
8/17/2012	Body 5180	e'	48.7582	Relative Permittivity (ϵ_r):	48.76	49.05	-0.59	10
		e"	18.2983	Conductivity (σ):	5.27	5.27	-0.02	5
	Body 5200	e'	48.6895	Relative Permittivity (ϵ_r):	48.69	49.02	-0.67	10
		e"	18.5292	Conductivity (σ):	5.36	5.29	1.19	5
	Body 5500	e'	48.2614	Relative Permittivity (ϵ_r):	48.26	48.61	-0.72	10
		e"	18.4879	Conductivity (σ):	5.65	5.64	0.17	5
	Body 5800	e'	47.8280	Relative Permittivity (ϵ_r):	47.83	48.20	-0.77	10
		e"	18.5839	Conductivity (σ):	5.99	6.00	-0.11	5
	Body 5825	e'	47.6417	Relative Permittivity (ϵ_r):	47.64	48.20	-1.16	10
		e"	18.6662	Conductivity (σ):	6.05	6.00	0.76	5
8/27/2012	Body 1900	e'	51.5963	Relative Permittivity (ϵ_r):	51.60	53.30	-3.20	5
		e"	14.5182	Conductivity (σ):	1.53	1.52	0.91	5
	Body 1850	e'	51.7602	Relative Permittivity (ϵ_r):	51.76	53.30	-2.89	5
		e"	14.3460	Conductivity (σ):	1.48	1.52	-2.91	5
	Body 1880	e'	51.6551	Relative Permittivity (ϵ_r):	51.66	53.30	-3.09	5
		e"	14.4462	Conductivity (σ):	1.51	1.52	-0.65	5
	Body 1910	e'	51.5599	Relative Permittivity (ϵ_r):	51.56	53.30	-3.26	5
		e"	14.5553	Conductivity (σ):	1.55	1.52	1.70	5

Tissue Dielectric Parameter Check Results (continued)
SAR Room C

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
8/28/2012	Body 1900	e'	51.5822	Relative Permittivity (ϵ_r):	51.58	53.30	-3.22	5
		e"	14.6968	Conductivity (σ):	1.55	1.52	2.15	5
	Body 1850	e'	51.7228	Relative Permittivity (ϵ_r):	51.72	53.30	-2.96	5
		e"	14.5120	Conductivity (σ):	1.49	1.52	-1.79	5
	Body 1880	e'	51.6265	Relative Permittivity (ϵ_r):	51.63	53.30	-3.14	5
		e"	14.6225	Conductivity (σ):	1.53	1.52	0.56	5
	Body 1910	e'	51.5541	Relative Permittivity (ϵ_r):	51.55	53.30	-3.28	5
		e"	14.7254	Conductivity (σ):	1.56	1.52	2.89	5
8/29/2012	Body 1900	e'	52.2102	Relative Permittivity (ϵ_r):	52.21	53.30	-2.04	5
		e"	14.6946	Conductivity (σ):	1.55	1.52	2.13	5
	Body 1850	e'	52.3994	Relative Permittivity (ϵ_r):	52.40	53.30	-1.69	5
		e"	14.5135	Conductivity (σ):	1.49	1.52	-1.78	5
	Body 1880	e'	52.2774	Relative Permittivity (ϵ_r):	52.28	53.30	-1.92	5
		e"	14.6220	Conductivity (σ):	1.53	1.52	0.56	5
	Body 1910	e'	52.1788	Relative Permittivity (ϵ_r):	52.18	53.30	-2.10	5
		e"	14.7329	Conductivity (σ):	1.56	1.52	2.94	5
8/30/2012	Body 1900	e'	51.5345	Relative Permittivity (ϵ_r):	51.53	53.30	-3.31	5
		e"	14.5684	Conductivity (σ):	1.54	1.52	1.26	5
	Body 1850	e'	51.6963	Relative Permittivity (ϵ_r):	51.70	53.30	-3.01	5
		e"	14.3900	Conductivity (σ):	1.48	1.52	-2.62	5
	Body 1880	e'	51.6028	Relative Permittivity (ϵ_r):	51.60	53.30	-3.18	5
		e"	14.4909	Conductivity (σ):	1.51	1.52	-0.34	5
	Body 1910	e'	51.4977	Relative Permittivity (ϵ_r):	51.50	53.30	-3.38	5
		e"	14.6030	Conductivity (σ):	1.55	1.52	2.03	5
8/31/2012	Body 1900	e'	51.3872	Relative Permittivity (ϵ_r):	51.39	53.30	-3.59	5
		e"	14.6007	Conductivity (σ):	1.54	1.52	1.48	5
	Body 1850	e'	51.5644	Relative Permittivity (ϵ_r):	51.56	53.30	-3.26	5
		e"	14.4373	Conductivity (σ):	1.49	1.52	-2.30	5
	Body 1880	e'	51.4625	Relative Permittivity (ϵ_r):	51.46	53.30	-3.45	5
		e"	14.5294	Conductivity (σ):	1.52	1.52	-0.08	5
	Body 1910	e'	51.3518	Relative Permittivity (ϵ_r):	51.35	53.30	-3.66	5
		e"	14.6384	Conductivity (σ):	1.55	1.52	2.28	5
9/5/2012	Body 1900	e'	52.0070	Relative Permittivity (ϵ_r):	52.01	53.30	-2.43	5
		e"	14.3914	Conductivity (σ):	1.52	1.52	0.03	5
	Body 1850	e'	52.1755	Relative Permittivity (ϵ_r):	52.18	53.30	-2.11	5
		e"	14.2288	Conductivity (σ):	1.46	1.52	-3.71	5
	Body 1880	e'	52.0684	Relative Permittivity (ϵ_r):	52.07	53.30	-2.31	5
		e"	14.3287	Conductivity (σ):	1.50	1.52	-1.46	5
	Body 1910	e'	51.9755	Relative Permittivity (ϵ_r):	51.98	53.30	-2.48	5
		e"	14.4161	Conductivity (σ):	1.53	1.52	0.72	5
9/6/2012	Body 1900	e'	51.3937	Relative Permittivity (ϵ_r):	51.39	53.30	-3.58	5
		e"	14.5405	Conductivity (σ):	1.54	1.52	1.06	5
	Body 1850	e'	51.6084	Relative Permittivity (ϵ_r):	51.61	53.30	-3.17	5
		e"	14.3560	Conductivity (σ):	1.48	1.52	-2.85	5
	Body 1880	e'	51.4786	Relative Permittivity (ϵ_r):	51.48	53.30	-3.42	5
		e"	14.4654	Conductivity (σ):	1.51	1.52	-0.52	5
	Body 1910	e'	51.3576	Relative Permittivity (ϵ_r):	51.36	53.30	-3.64	5
		e"	14.5740	Conductivity (σ):	1.55	1.52	1.83	5

Tissue Dielectric Parameter Check Results (continued)
SAR Room C

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
9/7/2012	Body 1900	e'	51.4596	Relative Permittivity (ϵ_r):	51.46	53.30	-3.45	5
		e"	14.4744	Conductivity (σ):	1.53	1.52	0.60	5
	Body 1850	e'	51.7011	Relative Permittivity (ϵ_r):	51.70	53.30	-3.00	5
		e"	14.3073	Conductivity (σ):	1.47	1.52	-3.18	5
	Body 1880	e'	51.5600	Relative Permittivity (ϵ_r):	51.56	53.30	-3.26	5
		e"	14.1058	Conductivity (σ):	1.47	1.52	-2.99	5
	Body 1910	e'	51.4184	Relative Permittivity (ϵ_r):	51.42	53.30	-3.53	5
		e"	14.5094	Conductivity (σ):	1.54	1.52	1.38	5
9/10/2012	Body 1900	e'	51.6917	Relative Permittivity (ϵ_r):	51.69	53.30	-3.02	5
		e"	14.3704	Conductivity (σ):	1.52	1.52	-0.12	5
	Body 1850	e'	51.8960	Relative Permittivity (ϵ_r):	51.90	53.30	-2.63	5
		e"	14.2628	Conductivity (σ):	1.47	1.52	-3.48	5
	Body 1880	e'	51.8403	Relative Permittivity (ϵ_r):	51.84	53.30	-2.74	5
		e"	14.2866	Conductivity (σ):	1.49	1.52	-1.75	5
	Body 1910	e'	51.8150	Relative Permittivity (ϵ_r):	51.82	53.30	-2.79	5
		e"	14.3265	Conductivity (σ):	1.52	1.52	0.10	5
9/11/2012	Body 1900	e'	51.2260	Relative Permittivity (ϵ_r):	51.23	53.30	-3.89	5
		e"	14.7107	Conductivity (σ):	1.55	1.52	2.25	5
	Body 1850	e'	51.4013	Relative Permittivity (ϵ_r):	51.40	53.30	-3.56	5
		e"	14.5465	Conductivity (σ):	1.50	1.52	-1.56	5
	Body 1880	e'	51.2906	Relative Permittivity (ϵ_r):	51.29	53.30	-3.77	5
		e"	14.6529	Conductivity (σ):	1.53	1.52	0.77	5
	Body 1910	e'	51.1866	Relative Permittivity (ϵ_r):	51.19	53.30	-3.97	5
		e"	14.7319	Conductivity (σ):	1.56	1.52	2.93	5
9/18/2012	Body 1900	e'	50.8465	Relative Permittivity (ϵ_r):	50.85	53.30	-4.60	5
		e"	14.3171	Conductivity (σ):	1.51	1.52	-0.49	5
	Body 1850	e'	51.0403	Relative Permittivity (ϵ_r):	51.04	53.30	-4.24	5
		e"	14.0619	Conductivity (σ):	1.45	1.52	-4.84	5
	Body 1880	e'	51.0418	Relative Permittivity (ϵ_r):	51.04	53.30	-4.24	5
		e"	14.1273	Conductivity (σ):	1.48	1.52	-2.84	5
	Body 1910	e'	50.8894	Relative Permittivity (ϵ_r):	50.89	53.30	-4.52	5
		e"	14.3799	Conductivity (σ):	1.53	1.52	0.47	5

12. System Performance Check

The system performance check is performed prior to any usage of the system in order to verify SAR system measurement accuracy. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

12.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
 For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
 For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

12.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D750V3	1019	2/9/12	750	1g	8.44	8.84
				10g	5.53	5.84
D835V2	4d117	4/10/12	835	1g	9.38	9.52
				10g	6.15	6.31
D835V2	4d002	3/26/12	835	1g	9.32	9.41
				10g	6.08	6.20
D1900V2	5d140	4/12/12	1900	1g	39.8	40.2
				10g	20.8	21.3
D2450V2	748	2/7/12	2450	1g	52.7	49.9
				10g	24.6	23.4
D5GHzV2	1075	2/14/12	5200	1g	79.4	72.7
				10g	22.8	20.5
			5500	1g	85.7	77.7
				10g	24.3	21.7
			5800	1g	78.9	72.5
				10g	22.5	20.2
D5GHzV2	1003*	8/23/11	5200	1g	76.3	74.4
				10g	21.7	20.8
			5500	1g	80.7	79.9
				10g	23.0	22.3
			5800	1g	76.0	76.2
				10g	21.6	21.2

Note(s):

* No further system performance checks were performed after 8/23/12.

12.3. System Performance Check Results

SAR Room A

Date Tested	System Dipole		T.S. Liquid	SAR Measured (Normalized to 1 W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
	Type	Serial No.						
8/14/2012	D5GHzV2 (5.2GHz)	1075	Body	1g	78.3	72.7	7.70	±10
				10g	22.1	20.5	7.80	
8/15/2012	D5GHzV2 (5.2GHz)	1075	Body	1g	75.2	72.7	3.44	±10
				10g	21.3	20.5	3.90	
8/16/2012	D5GHzV2 (5.2GHz)	1075	Body	1g	73.6	72.7	1.24	±10
				10g	20.8	20.5	1.46	
8/17/2012	D5GHzV2 (5.2GHz)	1075	Body	1g	72.1	72.7	-0.83	±10
				10g	20.4	20.5	-0.49	
8/20/2012	D5GHzV2 (5.2GHz)	1075	Body	1g	72.0	72.7	-0.96	±10
				10g	20.5	20.5	0.00	
8/29/2012	D5GHzV2 (5.2GHz)	1075	Body	1g	75.2	72.7	3.44	±10
				10g	21.3	20.5	3.90	
9/5/2012	D2450V2	748	Body	1g	49.9	49.9	0.00	±10
				10g	23.1	23.4	-1.28	
9/6/2012	D2450V2	748	Body	1g	50.3	49.9	0.80	±10
				10g	23.2	23.4	-0.85	
9/6/2012	D750V3	1024	Body	1g	8.37	8.76	-4.45	±10
				10g	5.57	5.80	-3.97	
9/7/2012	D750V3	1024	Body	1g	8.57	8.76	-2.17	±10
				10g	5.71	5.80	-1.55	
9/10/2012	D750V3	1024	Body	1g	8.45	8.76	-3.54	±10
				10g	5.62	5.80	-3.10	
9/11/2012	D750V3	1024	Body	1g	8.60	8.76	-1.83	±10
				10g	5.73	5.80	-1.21	

SAR Room B

Date Tested	System Dipole		T.S. Liquid	SAR Measured (Normalized to 1 W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
	Type	Serial No.		1g	10g			
8/6/2012	D5GHzV2 (5.5GHz)	1003	Body	1g	79.5	79.9	-0.50	±10
				10g	21.6	22.3	-3.14	
8/6/2012	D5GHzV2 (5.6GHz)	1003	Body	1g	79.0	79.9	-1.13	±10
				10g	22.1	22.3	-0.90	
8/7/2012	D5GHzV2 (5.5GHz)	1003	Body	1g	81.7	79.9	2.25	±10
				10g	23.1	22.3	3.59	
8/7/2012	D5GHzV2 (5.6GHz)	1003	Body	1g	79.7	79.9	-0.25	±10
				10g	22.4	22.3	0.45	
8/9/2012	D5GHzV2 (5.5GHz)	1003	Body	1g	76.5	79.9	-4.26	±10
				10g	21.7	22.3	-2.69	
8/9/2012	D5GHzV2 (5.6GHz)	1003	Body	1g	77.4	79.9	-3.13	±10
				10g	21.8	23.3	-6.44	
8/13/2012	D5GHzV2 (5.5GHz)	1003	Body	1g	76.5	79.9	-4.26	±10
				10g	21.6	22.3	-3.14	
8/13/2012	D5GHzV2 (5.6GHz)	1003	Body	1g	86.3	79.9	8.01	±10
				10g	24.3	23.3	4.29	
8/14/2012	D5GHzV2 (5.5GHz)	1003	Body	1g	78.7	79.9	-1.50	±10
				10g	22.2	22.3	-0.45	
8/14/2012	D5GHzV2 (5.6GHz)	1003	Body	1g	83.2	79.9	4.13	±10
				10g	23.4	23.3	0.43	
8/17/2012	D5GHzV2 (5.5GHz)	1003	Body	1g	79.6	79.9	-0.38	±10
				10g	22.5	22.3	0.90	
8/17/2012	D5GHzV2 (5.6GHz)	1003	Body	1g	76.2	79.9	-4.63	±10
				10g	21.9	23.3	-6.01	
8/20/2012	D5GHzV2 (5.5GHz)	1003	Body	1g	80.2	79.9	0.38	±10
				10g	22.6	22.3	1.35	
8/20/2012	D5GHzV2 (5.6GHz)	1003	Body	1g	79.6	79.9	-0.38	±10
				10g	22.3	23.3	-4.29	
8/27/2012	D835V2	4d002	Body	1g	9.65	9.41	2.55	±10
				10g	6.34	6.20	2.26	
9/5/2012	D835V2	4d002	Body	1g	9.66	9.41	2.66	±10
				10g	6.36	6.20	2.58	
9/6/2012	D835V2	4d002	Body	1g	9.08	9.41	-3.51	±10
				10g	5.98	6.20	-3.55	
9/7/2012	D835V2	4d002	Body	1g	9.28	9.41	-1.38	±10
				10g	6.11	6.20	-1.45	
9/10/2012	D835V2	4d002	Body	1g	9.18	9.41	-2.44	±10
				10g	6.03	6.20	-2.74	
9/11/2012	D835V2	4d002	Body	1g	9.71	9.41	3.19	±10
				10g	6.39	6.20	3.06	
9/17/2012	D835V2	4d002	Body	1g	9.90	9.41	5.21	±10
				10g	6.48	6.20	4.52	
9/18/2012	D835V2	4d002	Body	1g	8.91	9.41	-5.31	±10
				10g	5.87	6.20	-5.32	

SAR Room C

Date Tested	System Dipole		T.S. Liquid	SAR Measured (Normalized to 1 W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
	Type	Serial No.		1g	10g			
8/8/2012	D5GHzV2 (5.8GHz)	1003	Body	1g	77.1	76.2	1.18	±10
				10g	21.6	21.2	1.89	
8/9/2012	D5GHzV2 (5.8GHz)	1003	Body	1g	69.1	76.2	-9.32	±10
				10g	19.5	21.2	-8.02	
8/14/2012	D2450V2	748	Body	1g	54.2	49.9	8.62	±10
				10g	25.4	23.4	8.55	
8/14/2012	D5GHzV2 (5.8GHz)	1075	Body	1g	74.4	72.5	2.62	±10
				10g	20.9	20.2	3.47	
8/15/2012	D5GHzV2 (5.8GHz)	1003	Body	1g	77.5	76.2	1.71	±10
				10g	21.8	21.2	2.83	
8/15/2012	D2450V2	748	Body	1g	47.3	49.9	-5.21	±10
				10g	22.1	23.4	-5.56	
8/16/2012	D5GHzV2 (5.8GHz)	1075	Body	1g	66.6	72.5	-8.14	±10
				10g	18.8	20.2	-6.93	
8/16/2012	D2450V2	748	Body	1g	52.3	49.9	4.81	±10
				10g	24.3	23.4	3.85	
8/17/2012	D5GHzV2 (5.8GHz)	1075	Body	1g	74.4	72.5	2.62	±10
				10g	20.9	20.2	3.47	
8/27/2012	D1900V2	5d140	Body	1g	41.6	40.2	3.48	±10
				10g	21.9	21.3	2.82	
8/28/2012	D1900V2	5d140	Body	1g	42.6	40.2	5.97	±10
				10g	22.5	21.3	5.63	
8/29/2012	D1900V2	5d140	Body	1g	42.1	40.2	4.73	±10
				10g	22.1	21.3	3.76	
8/30/2012	D1900V2	5d140	Body	1g	40.2	40.2	0.00	±10
				10g	21.0	21.3	-1.41	
8/31/2012	D1900V2	5d140	Body	1g	40.0	40.2	-0.50	±10
				10g	21.0	21.3	-1.41	
9/5/2012	D1900V2	5d140	Body	1g	41.4	40.2	2.99	±10
				10g	21.7	21.3	1.88	
9/6/2012	D1900V2	5d140	Body	1g	40.7	40.2	1.24	±10
				10g	21.4	21.3	0.47	
9/7/2012	D1900V2	5d140	Body	1g	39.6	40.2	-1.49	±10
				10g	20.8	21.3	-2.35	
9/10/2012	D1900V2	5d140	Body	1g	42.1	40.2	4.73	±10
				10g	22.2	21.3	4.23	
9/11/2012	D1900V2	5d140	Body	1g	43.0	40.2	6.97	±10
				10g	22.5	21.3	5.63	
9/18/2012	D1900V2	5d140	Body	1g	42.6	40.2	5.97	±10
				10g	22.3	21.3	4.69	

13. SAR Test Results

13.1. GSM850

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	GPRS 2 slots	128	824.2	26.3	1.160	
				190	836.6	26.3	1.160	
				251	848.8	26.3	1.140	
Edge 1	on (Second-stage)	0	GPRS 2 slots	128	824.2	26.3	0.985	
				190	836.6	26.3	0.903	
				251	848.8	26.3	0.869	
Edge 2	on (First-Stage)	0	GPRS 2 slots	128	824.2	31.5		1
				190	836.6	31.5	0.482	
				251	848.8	31.5		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	GPRS 2 slots	128	824.2	31.5		1
				190	836.6	31.5	0.705	
				251	848.8	31.5		1
Edge 2 Tile 35 deg	on (First-Stage)	0	GPRS 2 slots	128	824.2	31.5		1
				190	836.6	31.5	0.766	
				251	848.8	31.5		1
Rear	off	14	GPRS 2 slots	128	824.2	33.0	1.020	2
				190	836.6	33.0	1.020	2
				251	848.8	33.0	0.996	2
Edge 1	off	14	GPRS 2 slots	128	824.2	33.0	0.841	2
				190	836.6	33.0	0.863	2
				251	848.8	33.0	0.864	2

Note(s):

- SAR test was performed in the middle channel only as the measured level was < 50% of the SAR limit as stated in FCC "Public Notice DA 02-1438" by the SCC-34/SC-2. Testing in the low and high channel is optional.
- SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.2. GSM1900

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	GPRS 2 slots	512	1850.2	20.5	1.130	
				661	1880.0	20.5	1.160	
				810	1909.8	20.5	1.160	
Edge 1	on (Second-stage)	0	GPRS 2 slots	512	1850.2	20.5	0.805	
				661	1880.0	20.5	0.833	
				810	1909.8	20.5	0.891	
Edge 2	on (First-Stage)	0	GPRS 2 slots	512	1850.2	26.5		1
				661	1880.0	26.5	0.730	
				810	1909.8	26.5		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	GPRS 2 slots	512	1850.2	26.5		1
				661	1880.0	26.5	0.679	
				810	1909.8	26.5		1
Edge 2 Tile 35 deg	on (First-Stage)	0	GPRS 2 slots	512	1850.2	26.6	0.832	
				661	1880.0	26.6	0.840	
				810	1909.8	26.6	0.845	
Rear	off	14	GPRS 2 slots	512	1850.2	29.4	0.939	2
				661	1880.0	29.5	0.930	2
				810	1909.8	29.5	0.988	2
Edge 1	off	14	GPRS 2 slots	512	1850.2	29.4	1.000	2
				661	1880.0	29.5	1.020	2
				810	1909.8	29.5	1.090	2

Note(s):

1. According to FCC "Public Notice DA 02-1438" by the SCC-34/SC-2, when the SAR measured for the middle channel is < 50% of the SAR limit, testing for the low and high channel is optional.
2. SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.3. W-CDMA Band V

Test reduction considerations

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit as per KDB 941225 D01

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	Rel 99 RMC 12.2kbps	4132	826.4	17.3	0.944	
				4183	836.6	17.3	1.170	
				4233	846.6	17.3	1.130	
Edge 1	on (Second-stage)	0	Rel 99 RMC 12.2kbps	4132	826.4	17.3		1
				4183	836.6	17.3	0.591	
				4233	846.6	17.3		1
Edge 2	on (First-Stage)	0	Rel 99 RMC 12.2kbps	4132	826.4	23.0		1
				4183	836.6	23.0	0.498	
				4233	846.6	23.0		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	Rel 99 RMC 12.2kbps	4132	826.4	23.0		1
				4183	836.6	23.0	0.531	
				4233	846.6	23.0		1
Edge 2 Tile 35 deg	on (First-Stage)	0	Rel 99 RMC 12.2kbps	4132	826.4	23.0		1
				4183	836.6	23.0	0.672	
				4233	846.6	23.0		1
Rear	off	14	Rel 99 RMC 12.2kbps	4132	826.4	24.5	0.640	2
				4183	836.6	24.5	0.803	2
				4233	846.6	24.5	0.787	2
Edge 1	off	14	Rel 99 RMC 12.2kbps	4132	826.4	24.5		1
				4183	836.6	24.5	0.591	2
				4233	846.6	24.5		1

Note(s):

1. According to FCC "Public Notice DA 02-1438" by the SCC-34/SC-2, when the SAR measured for the middle channel is < 50% of the SAR limit, testing for the low and high channel is optional.
2. SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.4. W-CDMA Band II

Test reduction considerations

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit as per KDB 941225 D01

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	Rel 99 RMC 12.2kbps	9262	1852.4	13.0	1.120	
				9400	1880.0	13.0	1.150	
				9538	1907.6	13.0	1.170	
Edge 1	on (Second-stage)	0	Rel 99 RMC 12.2kbps	9262	1852.4	13.0	0.759	
				9400	1880.0	13.0	0.803	
				9538	1907.6	13.0	0.872	
Edge 2	on (First-Stage)	0	Rel 99 RMC 12.2kbps	9262	1852.4	20.0		1
				9400	1880.0	20.0	0.686	
				9538	1907.6	19.9		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	Rel 99 RMC 12.2kbps	9262	1852.4	20.0		1
				9400	1880.0	20.0	0.605	
				9538	1907.6	19.9		1
Edge 2 Tile 35 deg	on (First-Stage)	0	Rel 99 RMC 12.2kbps	9262	1852.4	20.0		1
				9400	1880.0	20.0	0.760	
				9538	1907.6	19.9		1
Rear	off	14	Rel 99 RMC 12.2kbps	9262	1852.4	22.9	1.070	2
				9400	1880.0	23.0	0.993	2
				9538	1907.6	23.0	0.975	2
Edge 1	off	14	Rel 99 RMC 12.2kbps	9262	1852.4	22.9	1.070	2
				9400	1880.0	23.0	0.996	2
				9538	1907.6	23.0	0.998	2

Note(s):

1. According to FCC “Public Notice DA 02-1438” by the SCC-34/SC-2, when the SAR measured for the middle channel is < 50% of the SAR limit, testing for the low and high channel is optional.
2. SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.5. CDMA BC0

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	1xRTT (RC3 SO32)	1013	824.7	17.3	0.975	
				384	836.5	17.3	1.190	
				777	848.3	17.2	1.170	
Edge 1	on (Second-stage)	0	1xRTT (RC3 SO32)	1013	824.7	17.3		1
				384	836.5	17.3	0.752	
				777	848.3	17.2		1
Edge 2	on (First-Stage)	0	1xRTT (RC3 SO32)	1013	824.7	23.0		1
				384	836.5	23.0	0.525	
				777	848.3	22.9		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	1xRTT (RC3 SO32)	1013	824.7	23.0		1
				384	836.5	23.0	0.618	
				777	848.3	22.9		1
Edge 2 Tile 35 deg	on (First-Stage)	0	1xRTT (RC3 SO32)	1013	824.7	23.0		1
				384	836.5	23.0	0.764	
				777	848.3	22.9		1
Rear	off	14	1xRTT (RC3 SO32)	1013	824.7	24.5	0.693	2
				384	836.5	24.5	0.806	2
				777	848.3	24.5	0.860	2
Edge 1	off	14	1xRTT (RC3 SO32)	1013	824.7	24.5		1
				384	836.5	24.5	0.578	2
				777	848.3	24.5		1
Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	1xEVDO (Rel. 0)	1013	824.7	17.3	0.970	
				384	836.5	17.3	1.140	
				777	848.3	17.3	1.130	
Edge 1	on (Second-stage)	0	1xEVDO (Rel. 0)	1013	824.7	17.3		1
				384	836.5	17.3	0.697	
				777	848.3	17.3		1
Edge 2	on (First-Stage)	0	1xEVDO (Rel. 0)	1013	824.7	23.0		1
				384	836.5	23.0	0.573	
				777	848.3	23.0		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	1xEVDO (Rel. 0)	1013	824.7	23.0		1
				384	836.5	23.0	0.604	
				777	848.3	23.0		1
Edge 2 Tile 35 deg	on (First-Stage)	0	1xEVDO (Rel. 0)	1013	824.7	23.0		1
				384	836.5	23.0	0.781	
				777	848.3	23.0		1
Rear	off	14	1xEVDO (Rel. 0)	1013	824.7	24.4	0.714	2
				384	836.5	24.5	0.823	2
				777	848.3	24.5	0.848	2
Edge 1	off	14	1xEVDO (Rel. 0)	1013	824.7	24.4		1
				384	836.5	24.5	0.543	2
				777	848.3	24.5		1

Note(s):

- According to FCC "Public Notice DA 02-1438" by the SCC-34/SC-2, when the SAR measured for the middle channel is < 50% of the SAR limit, testing for the low and high channel is optional.
- SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

CDMA BC0 continued

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	1xEVDO (Rev. B) Two Carrier Mini.	1013+31	824.70+825.93	17.3	0.914	
				384+425	836.52+837.75	17.3	1.170	
				736+777	847.08+848.31	17.3	1.140	
Edge 1	on (Second-stage)	0	1xEVDO (Rev. B) Two Carrier Mini.	1013+31	824.70+825.93	17.3		1
				384+425	836.52+837.75	17.3	0.347	
				736+777	847.08+848.31	17.3		1
Edge 2	on (First-Stage)	0	1xEVDO (Rev. B) Two Carrier Mini.	1013+31	824.70+825.93	21.5		1
				384+425	836.52+837.75	21.5	0.284	
				736+777	847.08+848.31	21.5		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	1xEVDO (Rev. B) Two Carrier Mini.	1013+31	824.70+825.93	21.5		1
				384+425	836.52+837.75	21.5	0.330	
				736+777	847.08+848.31	21.5		1
Edge 2 Tile 35 deg	on (First-Stage)	0	1xEVDO (Rev. B) Two Carrier Mini.	1013+31	824.70+825.93	21.5		1
				384+425	836.52+837.75	21.5	0.400	
				736+777	847.08+848.31	21.5		1
Rear	off	14	1xEVDO (Rev. B) Two Carrier Mini.	1013+31	824.70+825.93	21.4		1
				384+425	836.52+837.75	21.5	0.437	2
				736+777	847.08+848.31	21.4		1
Edge 1	off	14	1xEVDO (Rev. B) Two Carrier Mini.	1013+31	824.70+825.93	21.4		1
				384+425	836.52+837.75	21.5	0.283	2
				736+777	847.08+848.31	21.4		1

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	1xEVDO (Rev. B) Three carrier	1013+31+72	824.70+825.93+827.16	17.3	0.920	
				384+425+466	836.52+837.75+838.98	17.3	1.160	
				695+736+777	845.85+847.08+848.31	17.3	1.130	
Edge 1	on (Second-stage)	0	1xEVDO (Rev. B) Three carrier	1013+31+72	824.70+825.93+827.16	17.3		1
				384+425+466	836.52+837.75+838.98	17.3	0.290	
				695+736+777	845.85+847.08+848.31	17.3		1
Edge 2	on (First-Stage)	0	1xEVDO (Rev. B) Three carrier	1013+31+72	824.70+825.93+827.16	21.0		1
				384+425+466	836.52+837.75+838.98	20.9	0.264	
				695+736+777	845.85+847.08+848.31	21.0		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	1xEVDO (Rev. B) Three carrier	1013+31+72	824.70+825.93+827.16	21.0		1
				384+425+466	836.52+837.75+838.98	20.9	0.253	
				695+736+777	845.85+847.08+848.31	21.0		1
Edge 2 Tile 35 deg	on (First-Stage)	0	1xEVDO (Rev. B) Three carrier	1013+31+72	824.70+825.93+827.16	21.0		1
				384+425+466	836.52+837.75+838.98	20.9	0.374	
				695+736+777	845.85+847.08+848.31	21.0		1
Rear	off	14	1xEVDO (Rev. B) Three carrier	1013+31+72	824.70+825.93+827.16	21.0		1
				384+425+466	836.52+837.75+838.98	21.0	0.380	2
				695+736+777	845.85+847.08+848.31	21.0		1
Edge 1	off	14	1xEVDO (Rev. B) Three carrier	1013+31+72	824.70+825.93+827.16	21.0		1
				384+425+466	836.52+837.75+838.98	21.0	0.236	2
				695+736+777	845.85+847.08+848.31	21.0		1

Note(s):

1. According to FCC "Public Notice DA 02-1438" by the SCC-34/SC-2, when the SAR measured for the middle channel is < 50% of the SAR limit, testing for the low and high channel is optional.
2. SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.6. CDMA BC1

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	1xRTT (RC3 SO32)	25	1851.25	13.2	1.070	
				600	1880.00	13.3	1.190	
				1175	1908.75	13.1	1.090	
Edge 1	on (Second-stage)	0	1xRTT (RC3 SO32)	25	1851.25	13.2	0.803	
				600	1880.00	13.3	0.927	
				1175	1908.75	13.1	0.872	
Edge 2	on (First-Stage)	0	1xRTT (RC3 SO32)	25	1851.25	19.9		1
				600	1880.00	20.0	0.768	
				1175	1908.75	20.0		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	1xRTT (RC3 SO32)	25	1851.25	19.9		1
				600	1880.00	20.0	0.660	
				1175	1908.75	20.0		1
Edge 2 Tile 35 deg	on (First-Stage)	0	1xRTT (RC3 SO32)	25	1851.25	19.9		1
				600	1880.00	20.0	0.766	
				1175	1908.75	20.0		1
Rear	off	14	1xRTT (RC3 SO32)	25	1851.25	23.0	0.921	2
				600	1880.00	23.0	0.839	2
				1175	1908.75	23.0	0.822	2
Edge 1	off	14	1xRTT (RC3 SO32)	25	1851.25	23.0	1.130	2
				600	1880.00	23.0	1.100	2
				1175	1908.75	23.0	1.100	2
Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	1xEVDO (Rel. 0)	25	1851.25	13.1	1.020	
				600	1880.00	13.2	1.120	
				1175	1908.75	13.1	1.120	
Edge 1	on (Second-stage)	0	1xEVDO (Rel. 0)	25	1851.25	13.1	0.831	
				600	1880.00	13.2	0.933	
				1175	1908.75	13.1	0.874	
Edge 2	on (First-Stage)	0	1xEVDO (Rel. 0)	25	1851.25	19.9		1
				600	1880.00	20.0	0.670	
				1175	1908.75	19.9		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	1xEVDO (Rel. 0)	25	1851.25	19.9		1
				600	1880.00	20.0	0.673	
				1175	1908.75	19.9		1
Edge 2 Tile 35 deg	on (First-Stage)	0	1xEVDO (Rel. 0)	25	1851.25	19.9		1
				600	1880.00	20.0	0.713	
				1175	1908.75	19.9		1
Rear	off	14	1xEVDO (Rel. 0)	25	1851.25	23.0	0.896	2
				600	1880.00	23.0	0.825	2
				1175	1908.75	23.0	0.804	2
Edge 1	off	14	1xEVDO (Rel. 0)	25	1851.25	23.0	1.090	2
				600	1880.00	23.0	0.970	2
				1175	1908.75	23.0	0.929	2

Note(s):

1. According to FCC "Public Notice DA 02-1438" by the SCC-34/SC-2, when the SAR measured for the middle channel is < 50% of the SAR limit, testing for the low and high channel is optional.
2. SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.7. CDMA BC10

Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	1xRTT (RC3 SO32)	476	817.9	17.3	1.060	
				580	820.5	17.3	1.170	
				684	823.1	17.3	1.110	
Edge 1	on (Second-stage)	0	1xRTT (RC3 SO32)	476	817.9	17.3		1
				580	820.5	17.3	0.760	
				684	823.1	17.3		1
Edge 2	on (First-Stage)	0	1xRTT (RC3 SO32)	476	817.9	23.0		1
				580	820.5	23.0	0.534	
				684	823.1	23.0		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	1xRTT (RC3 SO32)	476	817.9	23.0		1
				580	820.5	23.0	0.588	
				684	823.1	23.0		1
Edge 2 Tile 35 deg	on (First-Stage)	0	1xRTT (RC3 SO32)	476	817.9	23.0		1
				580	820.5	23.0	0.738	
				684	823.1	23.0		1
Rear	off	14	1xRTT (RC3 SO32)	476	817.9	24.4	0.712	2
				580	820.5	24.4	0.818	2
				684	823.1	24.5	0.862	2
Edge 1	off	14	1xRTT (RC3 SO32)	476	817.9	24.4		1
				580	820.5	24.4	0.585	2
				684	823.1	24.5		1
Test Position	Pwr Back-off	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	1xEVDO (Rel. 0)	476	817.9	17.3	1.070	
				580	820.5	17.3	1.150	
				684	823.1	17.3	1.140	
Edge 1	on (Second-stage)	0	1xEVDO (Rel. 0)	476	817.9	17.3		1
				580	820.5	17.3	0.688	
				684	823.1	17.3		1
Edge 2	on (First-Stage)	0	1xEVDO (Rel. 0)	476	817.9	23.0		1
				580	820.5	23.0	0.559	
				684	823.1	23.0		1
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	1xEVDO (Rel. 0)	476	817.9	23.0		1
				580	820.5	23.0	0.553	
				684	823.1	23.0		1
Edge 2 Tile 35 deg	on (First-Stage)	0	1xEVDO (Rel. 0)	476	817.9	23.0		1
				580	820.5	23.0	0.764	
				684	823.1	23.0		1
Rear	off	14	1xEVDO (Rel. 0)	476	817.9	24.4	0.713	2
				580	820.5	24.5	0.823	2
				684	823.1	24.5	0.866	2
Edge 1	off	14	1xEVDO (Rel. 0)	476	817.9	24.4		1
				580	820.5	24.5	0.562	2
				684	823.1	24.5		1

Note(s):

- According to FCC "Public Notice DA 02-1438" by the SCC-34/SC-2, when the SAR measured for the middle channel is < 50% of the SAR limit, testing for the low and high channel is optional.
- SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.8. LTE Band 5 (10 MHz Bandwidth)

Test Position	Pwr Back-off	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	MPR	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	QPSK	20450	829.0	1	49	0	17.0	1.040	
						25	12	1	17.0	0.891	
			QPSK	20525	836.5	1	0	0	16.9	0.960	
						1	24	0	17.0	1.170	
						1	49	0	17.0	1.040	
						25	0	1	17.0	1.080	
						25	12	1	17.0	1.120	
						25	24	1	17.0	1.150	
			QPSK	20600	844.0	1	0	0	17.0	1.110	
						25	12	1	17.0	0.954	
Edge 1	on (Second-stage)	0	QPSK	20525	836.5	1	0	0	16.9	0.592	
						1	24	0	17.0	0.672	
						1	49	0	17.0	0.737	
						25	0	1	17.0	0.562	
						25	12	1	17.0	0.581	
						25	24	1	17.0	0.606	
Edge 2	on (First-Stage)	0	QPSK	20525	836.5	1	0	0	22.3	0.332	
						1	24	0	22.5	0.457	
						1	49	0	22.5	0.476	
						25	0	1	22.5	0.380	
						25	12	1	22.4	0.427	
						25	24	1	22.5	0.457	
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	QPSK	20525	836.5	1	0	0	22.3	0.365	
						1	24	0	22.5	0.483	
						1	49	0	22.5	0.528	
						25	0	1	22.5	0.440	
						25	12	1	22.4	0.485	
						25	24	1	22.5	0.518	
Edge 2 Tile 35 deg	on (First-Stage)	0	QPSK	20525	836.5	1	0	0	22.3	0.490	
						1	24	0	22.5	0.631	
						1	49	0	22.5	0.670	
						25	0	1	22.5	0.578	
						25	12	1	22.4	0.642	
						25	24	1	22.5	0.702	
50	0	1	22.5	0.621							

LTE Band 5 (10MHz Bandwidth) continued

Test Position	Pwr Back-off	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	MPR	Power (dBm)	1g SAR (W/kg)	Note
Rear	off	14	QPSK	20525	836.5	1	0	0	24.0	0.523	2
						1	24	0	24.0	0.695	2
						1	49	0	24.0	0.675	2
						25	0	1	22.8	0.507	2
						25	12	1	23.0	0.551	2
						25	24	1	23.1	0.574	2
						50	0	1	23.1	0.538	2
Edge 1	off	14	QPSK	20525	836.5	1	0	0	24.0	0.402	2
						1	24	0	24.0	0.507	2
						1	49	0	24.0	0.515	2
						25	0	1	22.8	0.375	2
						25	12	1	23.0	0.396	2
						25	24	1	23.1	0.406	2
						50	0	1	23.1	0.399	2

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction are applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel
 - Testing for 16-QAM modulation is not required because the measured SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the measured SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.9. LTE Band 13 (10 MHz Bandwidth)

Test Position	Pwr Back-off	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	MPR	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	QPSK	23230	782.0	1	0	0	18.0	1.100	
						1	24	0	18.1	1.090	
						1	49	0	18.1	1.060	
						25	0	1	18.2	1.180	
						25	12	1	18.3	1.180	
						25	24	1	18.3	1.150	
						50	0	1	18.0	1.180	
Edge 1	on (Second-stage)	0	QPSK	23230	782.0	1	0	0	18.0	0.569	
						1	24	0	18.1	0.575	
						1	49	0	18.1	0.580	
						25	0	1	18.2	0.605	
						25	12	1	18.3	0.613	
						25	24	1	18.3	0.614	
						50	0	1	18.0	0.618	
Edge 2	on (First-Stage)	0	QPSK	23230	782.0	1	0	0	22.5	0.313	
						1	24	0	22.5	0.343	
						1	49	0	22.5	0.292	
						25	0	1	22.5	0.336	
						25	12	1	22.5	0.343	
						25	24	1	22.5	0.335	
						50	0	1	22.5	0.339	
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	QPSK	23230	782.0	1	0	0	22.5	0.348	
						1	24	0	22.5	0.388	
						1	49	0	22.5	0.352	
						25	0	1	22.5	0.368	
						25	12	1	22.5	0.379	
						25	24	1	22.5	0.385	
						50	0	1	22.5	0.376	
Edge 2 Tile 35 deg	on (First-Stage)	0	QPSK	23230	782.0	1	0	0	22.5	0.333	
						1	24	0	22.5	0.350	
						1	49	0	22.5	0.343	
						25	0	1	22.5	0.354	
						25	12	1	22.5	0.359	
						25	24	1	22.5	0.355	
						50	0	1	22.5	0.310	
Rear	off	14	QPSK	23230	782.0	1	0	0	24.0	0.466	2
						1	24	0	24.0	0.514	2
						1	49	0	24.0	0.452	2
						25	0	1	23.3	0.407	2
						25	12	1	23.4	0.419	2
						25	24	1	23.3	0.418	2
						50	0	1	23.3	0.405	2

LTE Band 13 (10MHz Bandwidth) continued

Test Position	Pwr Back-off	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	MPR	Power (dBm)	1g SAR (W/kg)	Note
Edge 1	off	14	QPSK	23230	782.0	1	0	0	24.0	0.249	2
						1	24	0	24.0	0.274	2
						1	49	0	24.0	0.242	2
						25	0	1	23.3	0.223	2
						25	12	1	23.4	0.229	2
						25	24	1	23.3	0.226	2
						50	0	1	23.3	0.227	2

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction are applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel
 - Testing for 16-QAM modulation is not required because the measured SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the measured SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.10. LTE Band 25 (20MHz Bandwidth)

Test Position	Pwr Back-off	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	MPR	Power (dBm)	1g SAR (W/kg)	Note
Rear	on (Second-stage)	0	QPSK	26140	1860.0	1	49	0	13.0	1.100	
						50	24	1	12.9	0.956	
						100	0	1	13.0	1.170	
				26365	1882.5	1	0	0	12.9	0.952	
						1	49	0	12.9	1.120	
						1	99	0	13.0	0.948	
						50	0	1	12.9	1.010	
						50	24	1	13.0	1.030	
						50	49	1	12.9	1.030	
						26590	1905.0	1	99	0	13.0
50	24	1	13.0	1.020							
Edge 1	on (Second-stage)	0	QPSK	26140	1860.0	1	49	0	13.0	0.758	
						50	24	1	12.9	0.798	
						100	0	1	13.0	0.829	
				26365	1882.5	1	0	0	12.9	0.879	
						1	49	0	12.9	0.970	
						1	99	0	13.0	0.835	
						50	0	1	12.9	0.819	
						50	24	1	13.0	0.832	
						50	49	1	12.9	0.781	
						26590	1905.0	1	99	0	13.0
50	24	1	13.0	0.734							
Edge 2	on (First-Stage)	0	QPSK	26365	1882.5	1	0	0	20.0	0.661	
						1	49	0	20.0	0.675	
						1	99	0	20.0	0.776	
						50	0	1	20.0	0.792	
						50	24	1	20.0	0.763	
						50	49	1	19.9	0.777	
						100	0	1	20.1	0.739	
Edge 1 and Edge 2 Tilt 40 deg	on (First-Stage)	0	QPSK	26365	1882.5	1	0	0	20.0	0.579	
						1	49	0	20.0	0.607	
						1	99	0	20.0	0.641	
						50	0	1	20.0	0.661	
						50	24	1	20.0	0.683	
						50	49	1	19.9	0.691	
						100	0	1	20.1	0.654	
Edge 2 Tile 35 deg	on (First-Stage)	0	QPSK	26140	1860.0	1	49	0	20.0	0.746	
						50	24	1	20.0	0.784	
						100	0	1	20.0	0.794	
				26365	1882.5	1	0	0	20.0	0.726	
						1	49	0	20.0	0.732	
						1	99	0	20.0	0.797	
						50	0	1	20.0	0.809	
						50	24	1	20.0	0.806	
						50	49	1	19.9	0.828	
						26590	1905.0	1	99	0	20.0
50	24	1	20.0	0.905							

LTE Band 25 (20MHz Bandwidth) continued

Test Position	Pwr Back-off	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	MPR	Power (dBm)	1g SAR (W/kg)	Note
Rear	off	14	QPSK	26140	1860.0	1	49	0	23.0	0.897	2
						50	24	1	22.1	0.748	2
						100	0	1	22.1	0.750	2
				26365	1882.5	1	0	0	23.0	0.839	2
						1	49	0	23.0	0.835	2
						1	99	0	23.0	0.870	2
						50	0	1	22.0	0.708	2
						50	24	1	22.1	0.702	2
						50	49	1	22.1	0.715	2
				26590	1905.0	1	99	0	23.0	0.826	2
						50	24	1	22.1	0.795	2
				Edge 1	off	14	QPSK	26140	1860.0	1	49
50	24	1	22.1							0.814	2
100	0	1	22.1							0.860	2
26365	1882.5	1	0					0	23.0	0.963	2
		1	49					0	23.0	0.892	2
		1	99					0	23.0	0.893	2
		50	0					1	22.0	0.764	2
		50	24					1	22.1	0.752	2
		50	49					1	22.1	0.735	2
26590	1905.0	1	99					0	23.0	0.948	2
		50	24					1	22.1	0.793	2

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction are applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel
 - Testing for 16-QAM modulation is not required because the measured SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the measured SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- SAR evaluation is performed with power back-off disabled (at full power) at the conservative distance of the second stage trigger. Therefore, additional SAR testing for different stages of power back-off is not performed.

13.11. Wi-Fi (2.4 GHz Band)

(BOM #1)

Test Position	Antenna	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	Primary	0	802.11b	1	2412	15.9		1
				6	2437	16.0	0.067	
				11	2462	16.0		1
Edge 3	Primary	0	802.11b	1	2412	15.9	0.654	
				6	2437	16.0	0.911	
				11	2462	16.0	1.070	
Edge 4	Primary	0	802.11b	1	2412	15.9		1
				6	2437	16.0	0.158	
				11	2462	16.0		1
Test Position	Antenna	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	Secondary	0	802.11b	1	2412	15.9		1
				6	2437	16.0	0.024	
				11	2462	16.0		1
Edge 2	Secondary	0	802.11b	1	2412	15.9		1
				6	2437	16.0	0.014	
				11	2462	16.0		1
Edge 3	Secondary	0	802.11b	1	2412	15.9		1
				6	2437	16.0	0.505	
				11	2462	16.0		1

Worst Case Spot Check (BOM #2)

Test Position	Antenna	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Edge 3	Primary	0	802.11b	11	2462	16.0	1.060	

Worst Case Spot Check (BOM #3)

Test Position	Antenna	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Edge 3	Primary	0	802.11b	11	2462	16.0	1.060	

Note(s):

- When the 1-g SAR for the mid-band channel, or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498)
 - ≤ 0.8 W/kg and transmission band ≤ 100 MHz
 - ≤ 0.6 W/kg and, 100 MHz < transmission bandwidth ≤ 200 MHz
 - ≤ 0.4 W/kg and transmission band > 200 MHz

13.12. Wi-Fi (5 GHz Bands)

(BOM #1)

Band (GHz)	Test Position	Antenna	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	
5.2	Rear	Primary	0	802.11a	36	5180	14.0	0.027	
					48	5240	13.9	0.032	
				802.11n HT40	46	5230	15.5	0.077	
	Edge 3	Primary	0	802.11a	36	5180	14.0	0.451	
					48	5240	13.9	0.477	
				802.11n HT40	46	5230	15.5	0.836	
	Edge 4	Primary	0	802.11a	36	5180	14.0	0.053	
					48	5240	13.9	0.055	
				802.11n HT40	46	5230	15.5	0.109	
5.3	Rear	Primary	0	802.11a	52	5260	16.9	0.126	
					60	5300	16.9	0.068	
	Edge 3	Primary	0	802.11a	52	5260	16.9	0.985	
					60	5300	16.9	0.808	
	Edge 4	Primary	0	802.11a	52	5260	16.9	0.155	
					60	5300	16.9	0.103	
5.5	Rear	Primary	0	802.11a	104	5520	16.0	0.072	
					116	5580	15.9	0.075	
					124	5620	16.0	0.108	
					136	5680	16.0	0.095	
	Edge 3	Primary	0	802.11a	104	5520	16.0	0.711	
					116	5580	15.9	0.690	
					124	5620	16.0	0.768	
					136	5680	16.0	0.933	
	Edge 4	Primary	0	802.11a	104	5520	16.0	0.087	
					116	5580	15.9	0.088	
					124	5620	16.0	0.126	
					136	5680	16.0	0.141	
	5.8	Rear	Primary	0	802.11a	149	5745	15.9	0.076
						157	5785	15.9	0.079
						165	5825	16.0	0.061
Edge 3		Primary	0	802.11a	149	5745	15.9	0.750	
					157	5785	15.9	0.887	
					165	5825	16.0	0.806	
Edge 4		Primary	0	802.11a	149	5745	15.9	0.108	
					157	5785	15.9	0.135	
					165	5825	16.0	0.117	

Wi-Fi (5 GHz Bands) continued

Band (GHz)	Test Position	Antenna	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)
5.2	Rear	Secondary	0	802.11a	36	5180	14.0	0.068
					48	5240	13.9	0.071
				802.11n HT40	46	5230	15.5	0.125
	Edge 2	Secondary	0	802.11a	36	5180	14.0	0.055
					48	5240	13.9	0.036
				802.11n HT40	46	5230	15.5	0.066
	Edge 3	Secondary	0	802.11a	36	5180	14.0	0.615
					48	5240	13.9	0.624
				802.11n HT40	46	5230	15.5	0.969
5.3	Rear	Secondary	0	802.11a	52	5260	17.0	0.168
					60	5300	16.9	0.139
	Edge 2	Secondary	0	802.11a	52	5260	17.0	0.086
					60	5300	16.9	0.064
	Edge 3	Secondary	0	802.11a	52	5260	17.0	1.140
					60	5300	16.9	1.040
5.5	Rear	Secondary	0	802.11a	104	5520	16.0	0.166
					116	5580	16.0	0.183
					124	5620	16.0	0.157
					136	5680	16.0	0.164
	Edge 2	Secondary	0	802.11a	104	5520	16.0	0.077
					116	5580	16.0	0.075
					124	5620	16.0	0.061
					136	5680	16.0	0.060
	Edge 3	Secondary	0	802.11a	104	5520	16.0	1.180
					116	5580	16.0	1.170
					124	5620	16.0	1.160
					136	5680	16.0	1.100
5.8	Rear	Secondary	0	802.11a	149	5745	16.0	0.161
					157	5785	16.0	0.154
					165	5825	16.0	0.144
	Edge 2	Secondary	0	802.11a	149	5745	16.0	0.052
					157	5785	16.0	0.036
					165	5825	16.0	0.045
	Edge 3	Secondary	0	802.11a	149	5745	16.0	1.040
					157	5785	16.0	1.170
					165	5825	16.0	1.040

Worst Case Spot Check (BOM #2)

Band (GHz)	Test Position	Antenna	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)
5.2	Edge 3	Secondary	0	802.11n HT40	46	5230	15.5	0.936
5.3	Edge 3	Secondary	0	802.11a	52	5260	17.0	0.963
5.5	Edge 3	Secondary	0	802.11a	104	5520	16.0	0.857
5.8	Edge 3	Secondary	0	802.11a	157	5785	16.0	1.170

Worst Case Spot Check (BOM #3)

Band (GHz)	Test Position	Antenna	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)
5.2	Edge 3	Secondary	0	802.11n HT40	46	5230	15.5	0.842
5.3	Edge 3	Secondary	0	802.11a	52	5260	17.0	0.639
5.5	Edge 3	Secondary	0	802.11a	104	5520	16.0	0.830
5.8	Edge 3	Secondary	0	802.11a	157	5785	16.0	0.929

13.13. Bluetooth

(BOM #1)

Test Position	Mode	Antenna	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	V2.1 + EDR, GFSK	primary	0	0	2412	11.8		1
				39	2437	12.0	0.029	
				78	2462	11.9		1
Edge 3	V2.1 + EDR, GFSK	primary	0	0	2412	11.8		1
				39	2437	12.0	0.395	
				78	2462	11.9		1
Edge 4	V2.1 + EDR, GFSK	primary	0	0	2412	11.8		1
				39	2437	12.0	0.079	
				78	2462	11.9		1
Test Position	Mode	Antenna	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Rear	V2.1 + EDR, GFSK	Secondary	0	0	2412	11.8		1
				39	2437	12.0	0.00292	
				78	2462	11.9		1
Edge 2	V2.1 + EDR, GFSK	Secondary	0	0	2412	11.8		1
				39	2437	12.0	0.025	
				78	2462	11.9		1
Edge 3	V2.1 + EDR, GFSK	Secondary	0	0	2412	11.8		1
				39	2437	12.0	0.198	
				78	2462	11.9		1

Worst Case Spot Check (BOM #2)

Test Position	Mode	Antenna	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Edge 3	V2.1 + EDR, GFSK	primary	0	39	2437	12.0	0.351	

Worst Case Spot Check (BOM #3)

Test Position	Mode	Antenna	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)	1g SAR (W/kg)	Note
Edge 3	V2.1 + EDR, GFSK	primary	0	39	2437	12.0	0.340	

Note(s):

- When the 1-g SAR for the mid-band channel, or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498)
 - ≤ 0.8 W/kg and transmission band ≤ 100 MHz
 - ≤ 0.6 W/kg and, 100 MHz < transmission bandwidth ≤ 200 MHz
 - ≤ 0.4 W/kg and transmission band > 200 MHz

14. Summary of Highest SAR Values

Results for highest SAR values for each frequency band and mode

Technology/Band	Test configuration				Mode	Highest 1g SAR (W/kg)
	Exposure	Position	Pwr Back-off	Tx Ant.		
GSM850	Body	Rear	on (Second-stage)	Primary	GPRS 2 slots	1.160
GSM1900	Body	Rear	on (Second-stage)	Primary	GPRS 2 slots	1.160
W-CDMA Band V	Body	Rear	on (Second-stage)	Primary	Rel 99 RMC 12.2kbps	1.170
W-CDMA Band II	Body	Rear	on (Second-stage)	Primary	Rel 99 RMC 12.2kbps	1.170
CDMA BC0	Body	Rear	on (Second-stage)	Primary	1xRTT (RC3, SO32)	1.190
	Body	Rear	on (Second-stage)	Primary	1xEVDO (Rel.0)	1.140
	Body	Rear	on (Second-stage)	Primary	1xEVDO (Rev. B) 2 Carrier Mini	1.170
	Body	Rear	on (Second-stage)	Primary	1xEVDO (Rev. B) 3 Carrier Mini	1.160
CDMA BC1	Body	Rear	on (Second-stage)	Primary	1xRTT (RC3, SO32)	1.190
	Body	Rear	on (Second-stage)	Primary	1xEVDO (Rel.0)	1.120
CDMA BC10	Body	Rear	on (Second-stage)	Primary	1xRTT (RC3, SO32)	1.170
	Body	Rear	on (Second-stage)	Primary	1xEVDO (Rel.0)	1.150
LTE Band 5	Body	Rear	on (Second-stage)	Primary	10 MHz (QPSK) RB 1/24	1.170
LTE Band 13	Body	Rear	on (Second-stage)	Primary	10 MHz (QPSK) RB 25/12	1.180
LTE Band 25	Body	Rear	on (Second-stage)	Primary	20 MHz (QPSK) RB 100/0	1.170
WiFi 2.4 GHz	Body	Edge 3		Primary	802.11b 1Mbps	1.070
Bluetooth	Body	Edge 3		Primary	GFSK	0.395
WiFi 5.2 GHz	Body	Edge 3		Secondary	802.11n HT40 MCS0	0.969
WiFi 5.3 GHz	Body	Edge 3		Secondary	802.11a 6Mbps	1.140
WiFi 5.5 GHz	Body	Edge 3		Secondary	802.11a 6Mbps	1.180
WiFi 5.8 GHz	Body	Edge 3		Secondary	802.11a 6Mbps	1.170

14.1. Scaled SAR Values to the Maximum Target Output Power

The highest measured SAR results were scaled, in cases where measured output power is lower than the maximum Target output power level, in each frequency band.

Technology /Band	Test Configuration				Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		SAR (W/kg)	
	Exposure	Position	Pwr Back-off	Tx Ant.					Tune-up limit	Measured	Measured	Scaled
CDMA BC0	Body	Rear	on (Second-stage)	Primary	1xRTT (RC3, SO32)	0	384	836.5	17.3	17.3	1.190	*
CDMA BC1	Body	Rear	on (Second-stage)	Primary	1xRTT (RC3, SO32)	0	600	1880	13.3	13.3	1.190	*
CDMA BC10	Body	Rear	on (Second-stage)	Primary	1xRTT (RC3, SO32)	0	580	820.5	17.3	17.3	1.170	*
LTE Band 13	Body	Rear	on (Second-stage)	Primary	20 MHz(QPSK) RB 25/12	0	23230	782	18.3	18.3	1.180	*
WiFi 2.4 GHz	Body	Edge 3		Primary	802.11b 1Mbps	0	11	2462	16.0	16.0	1.070	*
WiFi 5.2 GHz	Body	Edge 3		Secondary	802.11n HT40 MCS0	0	46	5230	15.5	15.5	0.969	*
WiFi 5.3 GHz	Body	Edge 3		Secondary	802.11a 6Mbps	0	52	5260	17.0	17.0	1.140	*
WiFi 5.5 GHz	Body	Edge 3		Secondary	802.11a 6Mbps	0	104	5520	16.0	16.0	1.180	*
WiFi 5.8 GHz	Body	Edge 3		Secondary	802.11a 6Mbps	0	157	5785	16.0	16.0	1.170	*

Note(s):

*: SAR Scaling was not applied when the measured output power is equal or greater than the maximum target output power.

14.2. SAR Plots (from Summary of Highest SAR Values)

Test Laboratory: UL CCS SAR Lab B Date: 8/30/2012

GSM850

Frequency: 824.4 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 53.823$; $\rho = 1000$ kg/m³

DASY5 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/GPRS 2 slots_Ch 128 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.036 mW/g

Rear/GPRS 2 slots_Ch 128 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 33.368 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 2.2910

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.611 mW/g
Maximum value of SAR (measured) = 1.599 mW/g

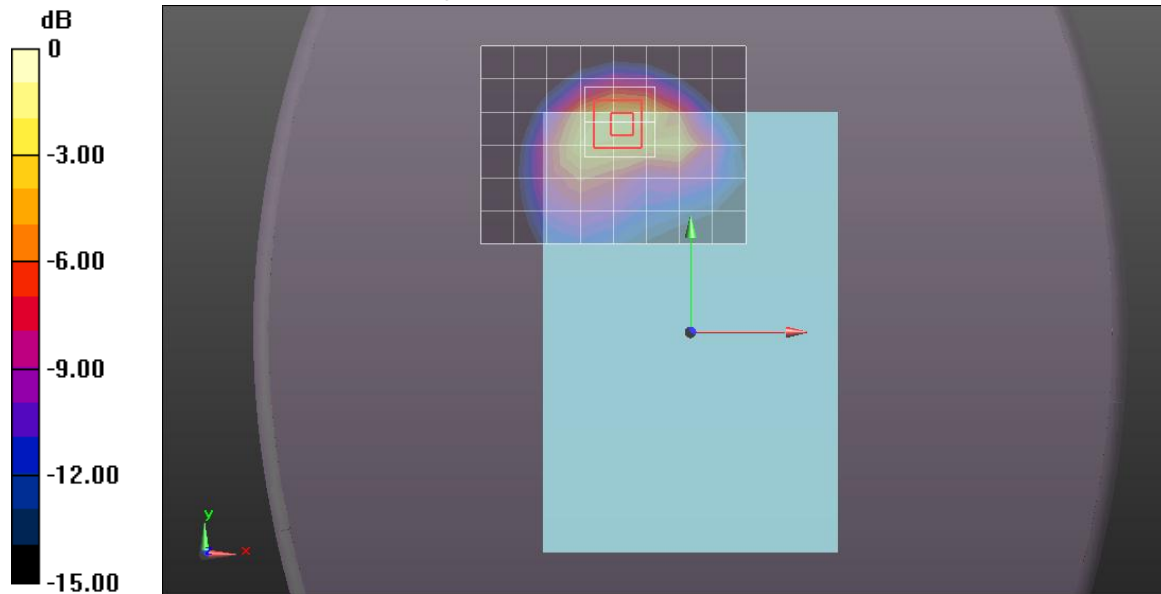

0 dB = 1.600mW/g = 4.08 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 8/30/2012


GSM850

Frequency: 824.4 MHz; Duty Cycle: 1:4.00037

Rear/GPRS 2 slots_Ch 128 w/ Pwr back-off (Pri.) (0 mm)/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.104 mW/g

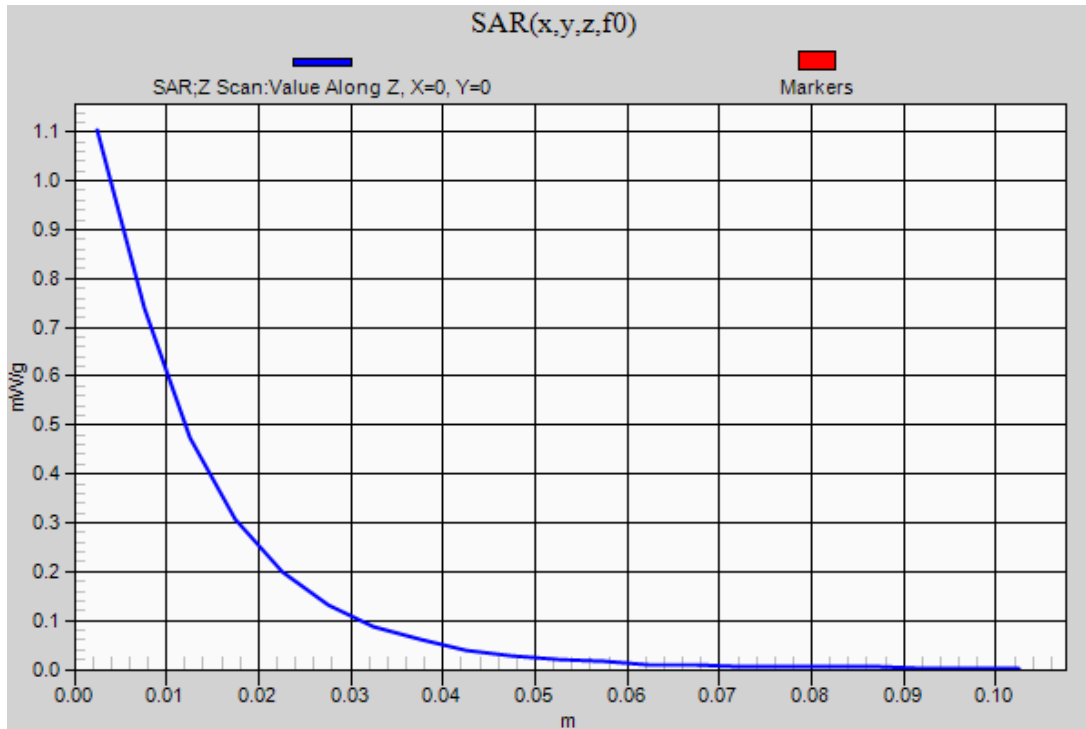

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 51.603$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/GPRS 2 slots Ch 661 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.829 mW/g

Rear/GPRS 2 slots Ch 661 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.501 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.3400

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.522 mW/g

Maximum value of SAR (measured) = 1.484 mW/g

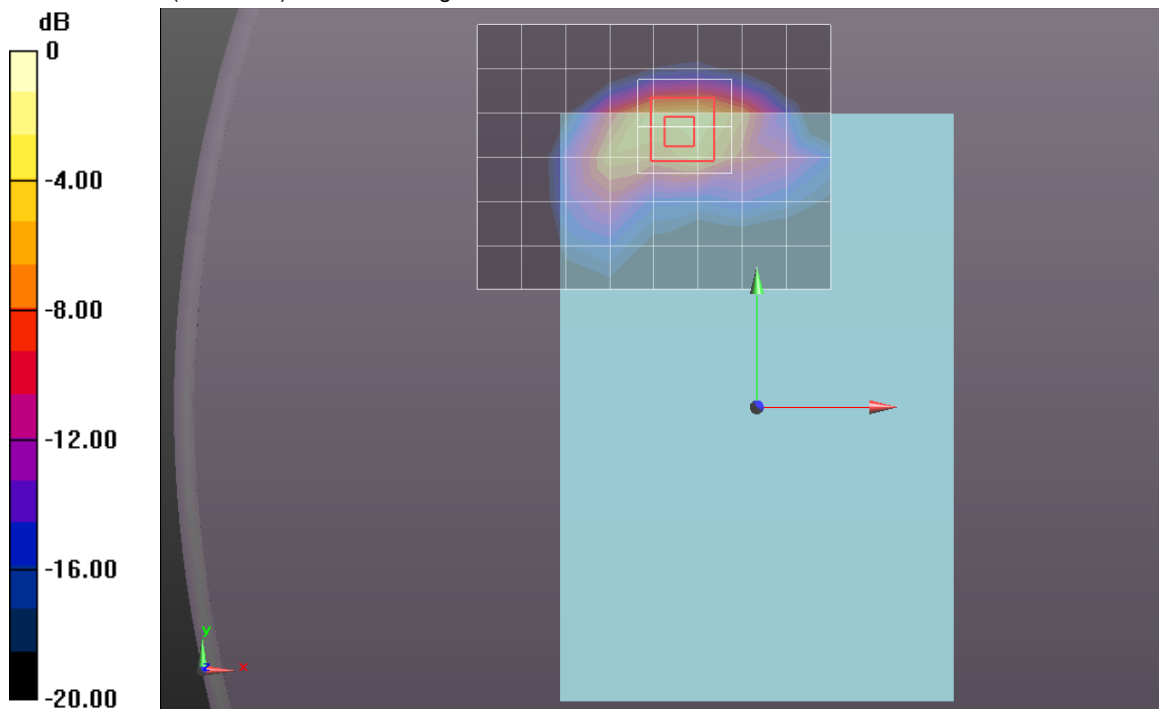


0 dB = 1.480mW/g = 3.41 dB mW/g

GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:4.00037

Rear/GPRS 2 slots Ch 661 w/ Pwr back-off (0 mm)/Z Scan (1x1x21): Measurement grid: dx=20mm
dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.819 mW/g

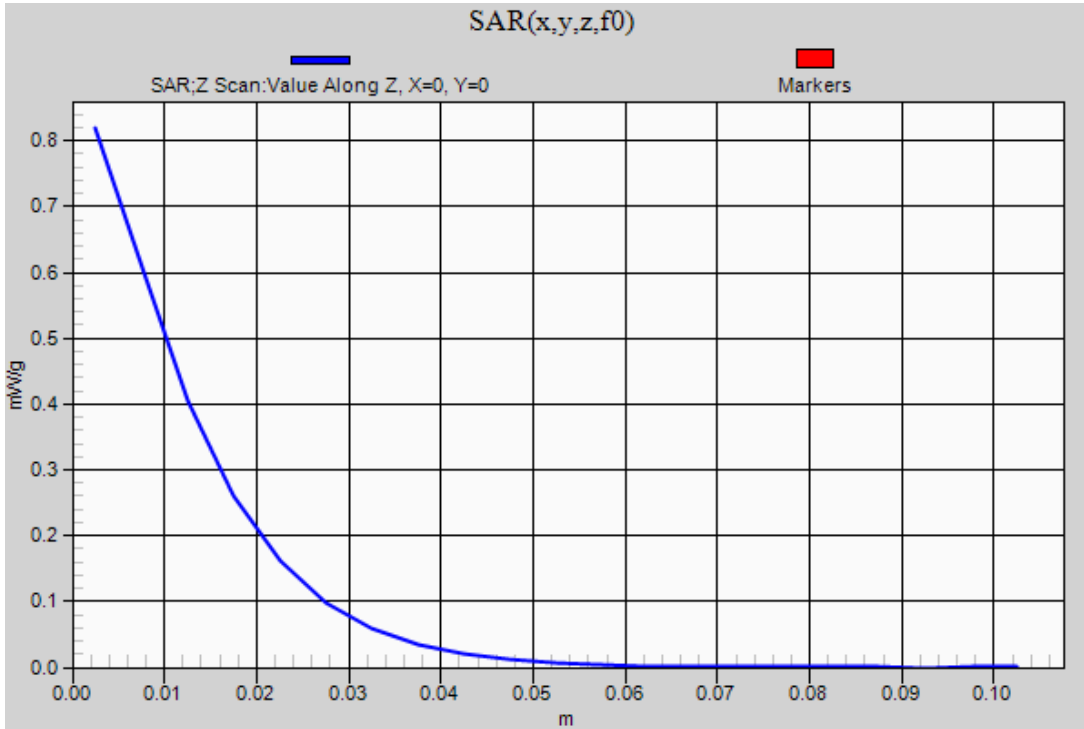

Test Laboratory: UL CCS SAR Lab B Date: 8/29/2012

UMTS Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 55.002$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/R99_Ch 4183 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.127 mW/g

Rear/R99_Ch 4183 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.077 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.3100

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.613 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.602 mW/g

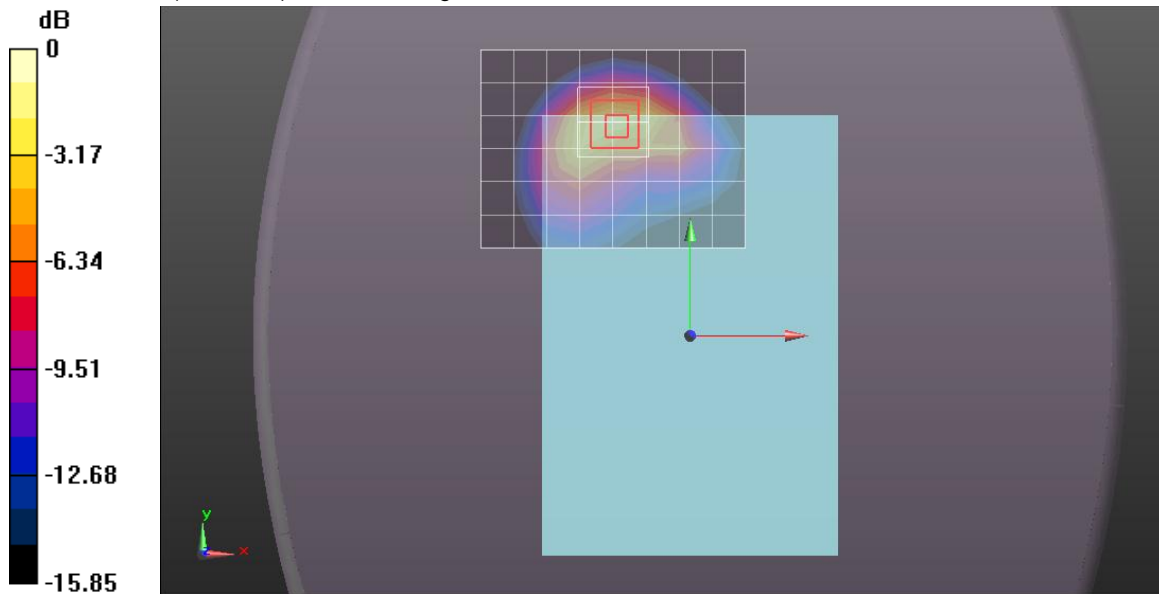

0 dB = 1.600mW/g = 4.08 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 8/29/2012


UMTS Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1

Rear/R99_Ch 4183 w/ Pwr back-off (Pri.) (0 mm)/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.282 mW/g

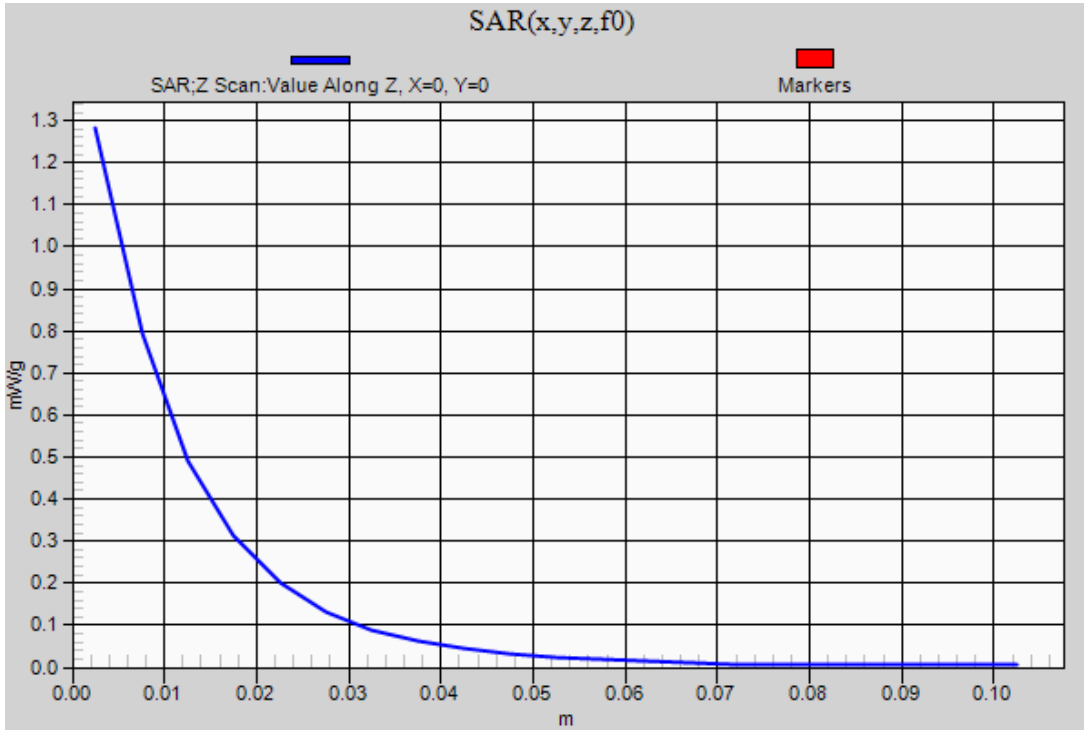

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.563$ mho/m; $\epsilon_r = 52.185$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/R99_Ch 9538 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.341 mW/g

Rear/R99_Ch 9538 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 29.782 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.3160

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.521 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.705 mW/g

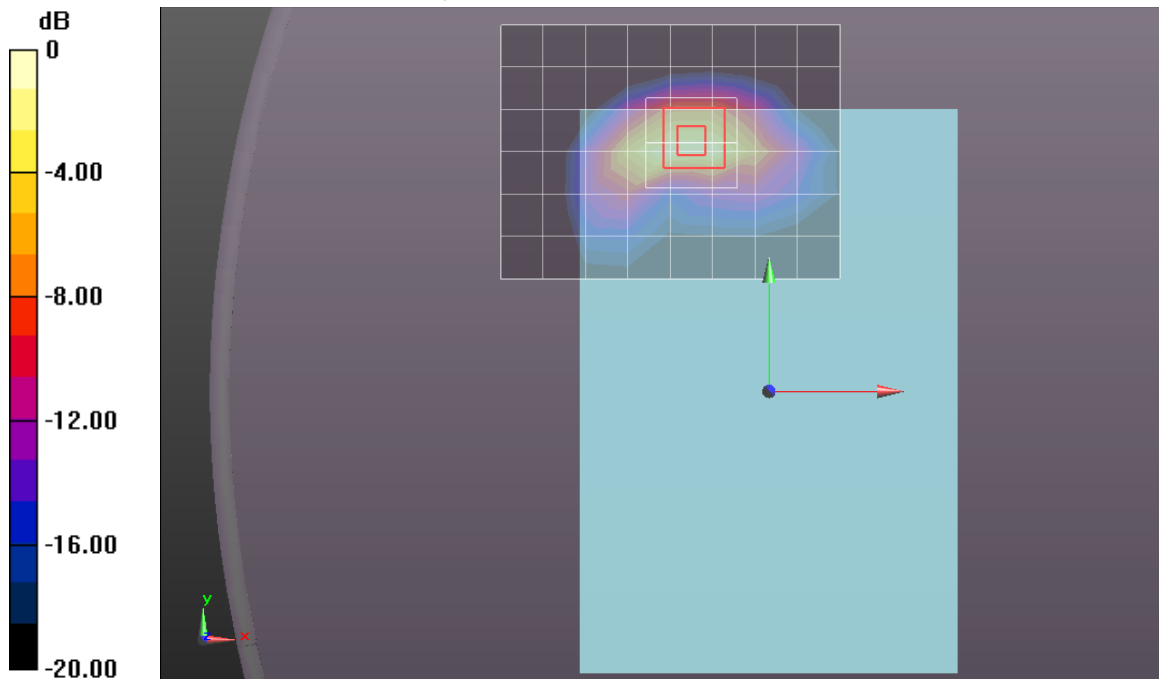

0 dB = 1.710mW/g = 4.66 dB mW/g


W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1

Rear/R99_Ch 9538 w/ Pwr back-off (0 mm)/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.346 mW/g

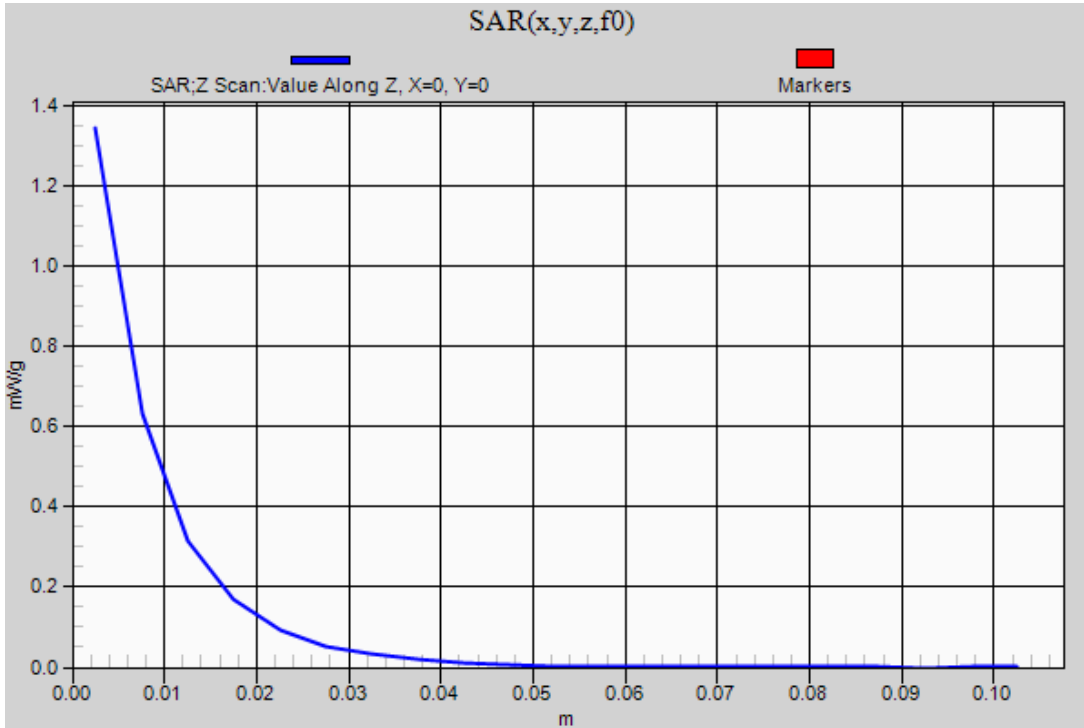

Test Laboratory: UL CCS SAR Lab B Date: 8/30/2012

CDMA-BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 53.838$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1):

Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.225 mW/g

Rear/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 36.072 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.3480

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.623 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.591 mW/g

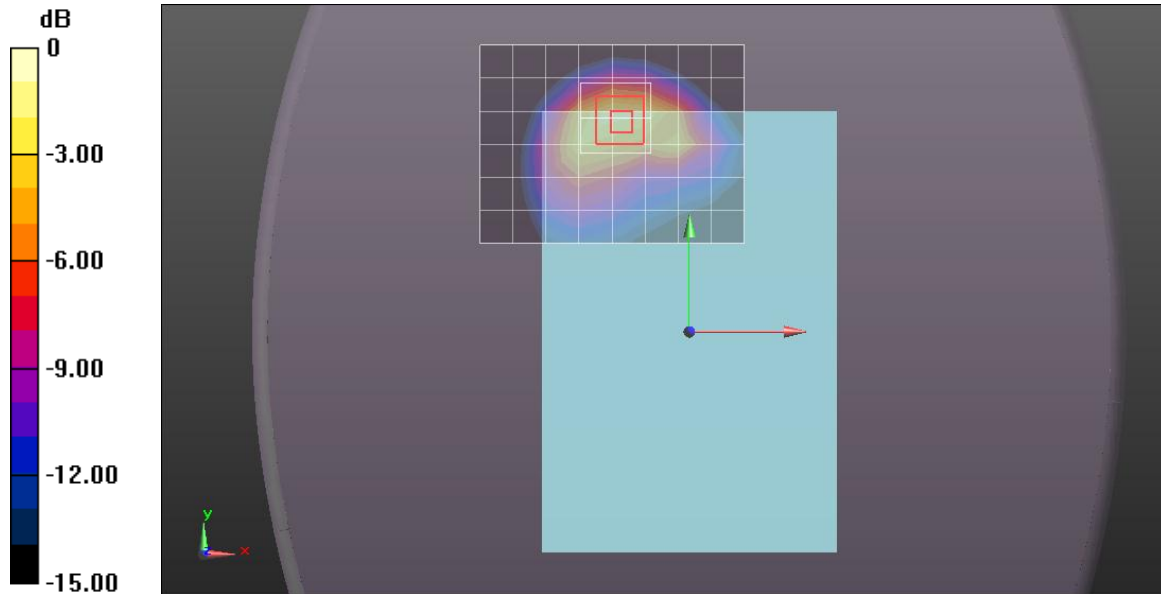

0 dB = 1.590mW/g = 4.03 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 8/30/2012

CDMA-BC0


Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xRTT_RC3 SO32_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Z Scan (1x1x21): Measurement

grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.250 mW/g

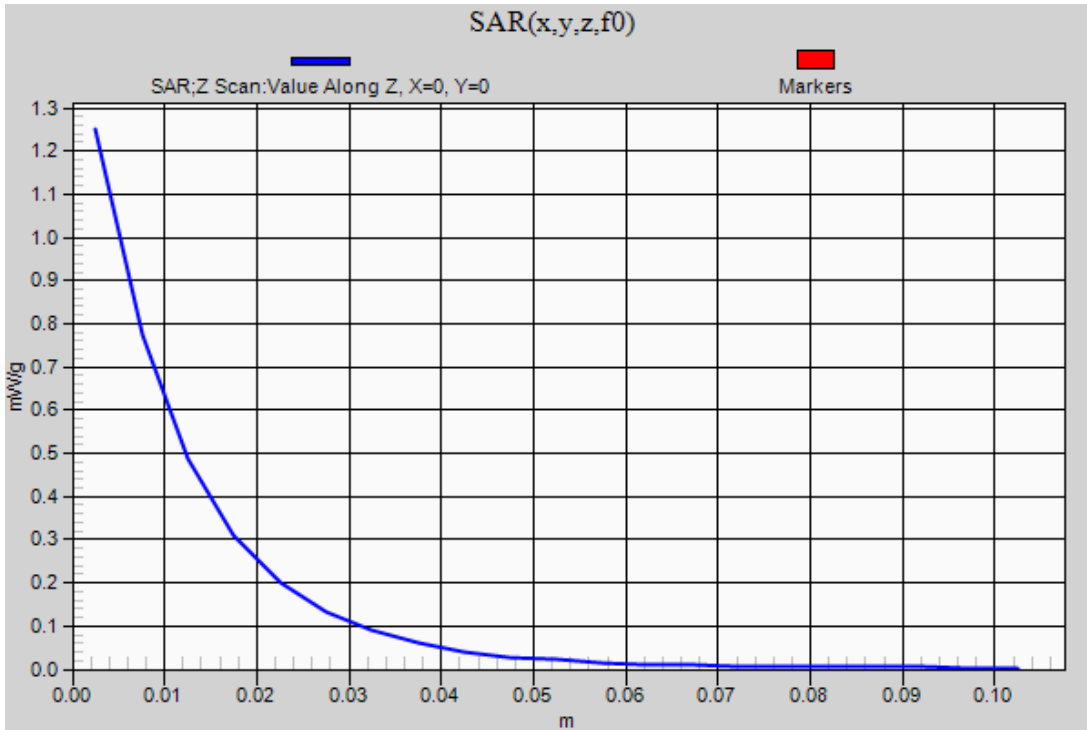

Test Laboratory: UL CCS SAR Lab B Date: 9/6/2012

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.230 mW/g

Rear/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 35.703 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.2100

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.599 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.581 mW/g

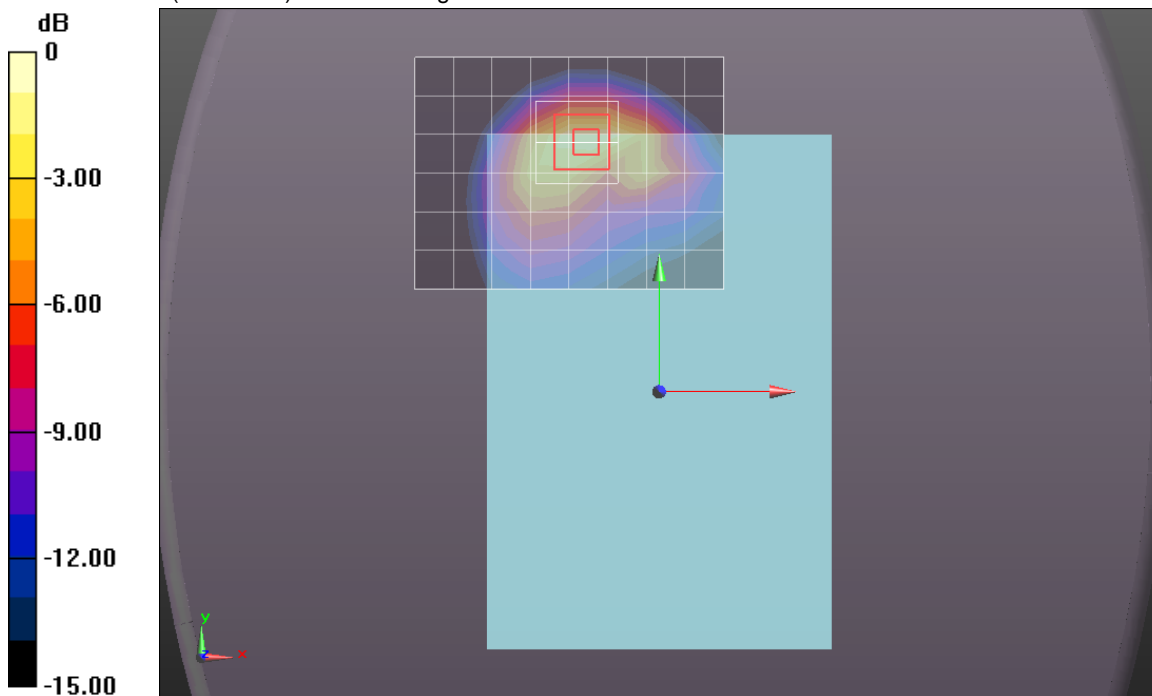

0 dB = 1.580mW/g = 3.97 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 9/6/2012

CDMA BC0


Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEV-DO_Rel 0_Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Z Scan (1x1x21): Measurement

grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.236 mW/g

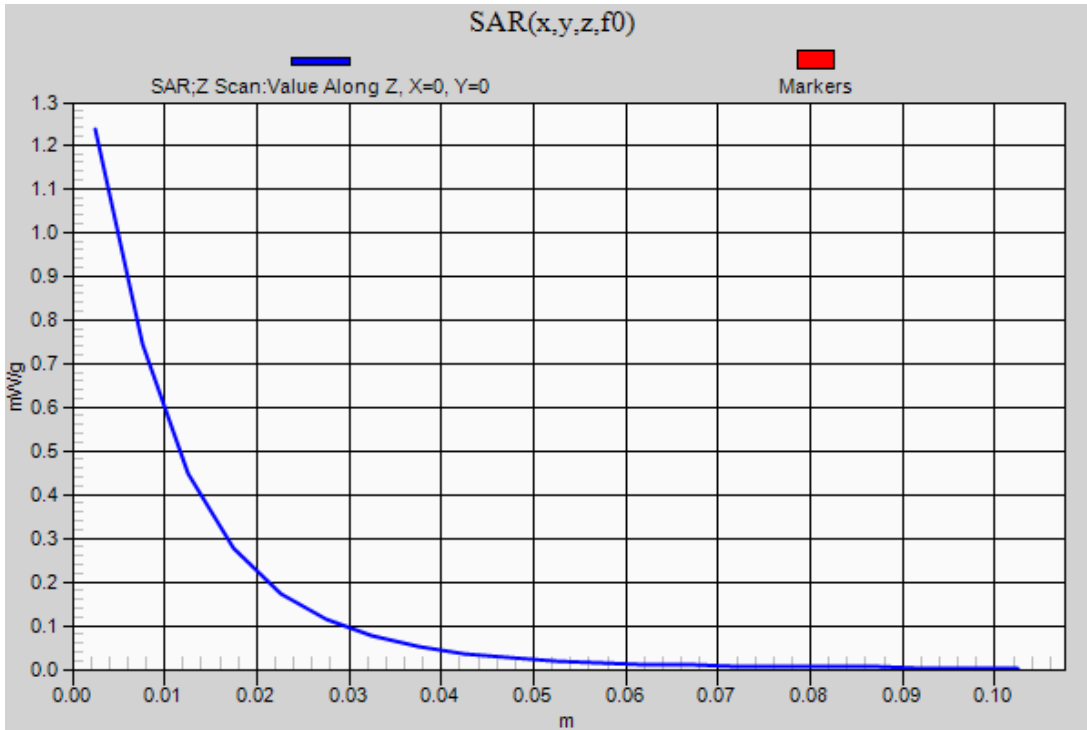

Test Laboratory: UL CCS SAR Lab B Date: 9/17/2012

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.490 mW/g

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 38.822 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.3010

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.613 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.592 mW/g

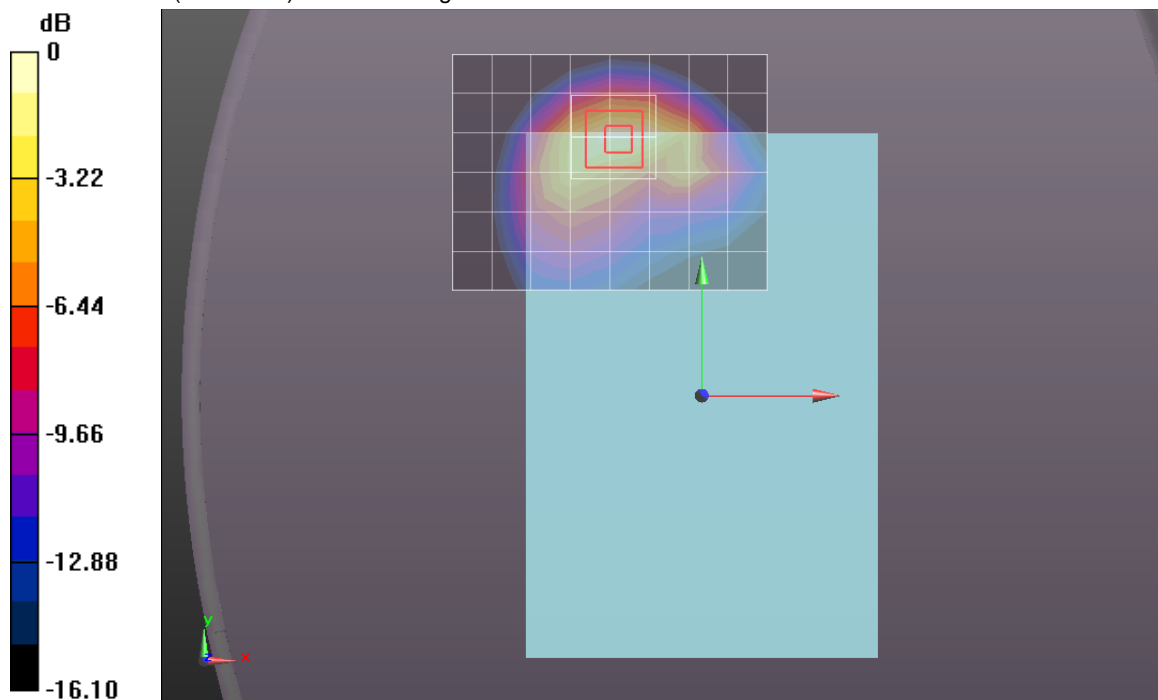

0 dB = 1.590mW/g = 4.03 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 9/17/2012

CDMA BC0


Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEV-DO_Rev. B_2 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Z Scan

(1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.518 mW/g

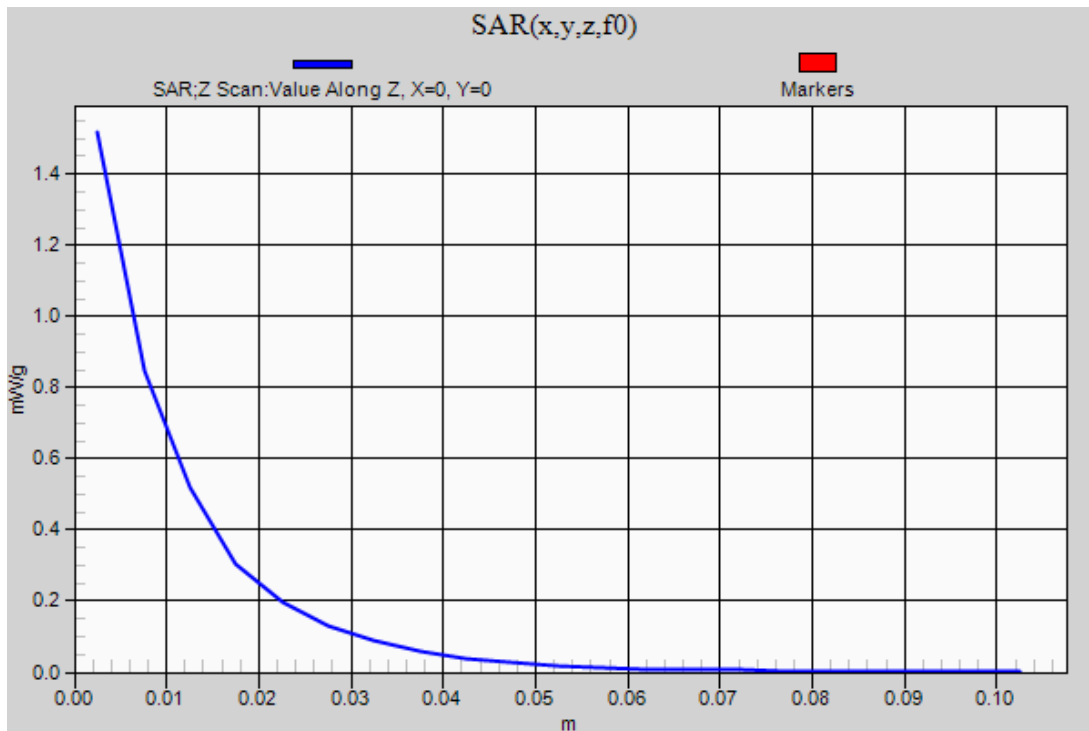

Test Laboratory: UL CCS SAR Lab B Date: 9/17/2012

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 54.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Area Scan

(9x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.506 mW/g

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 38.821 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.2850

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.603 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.635 mW/g

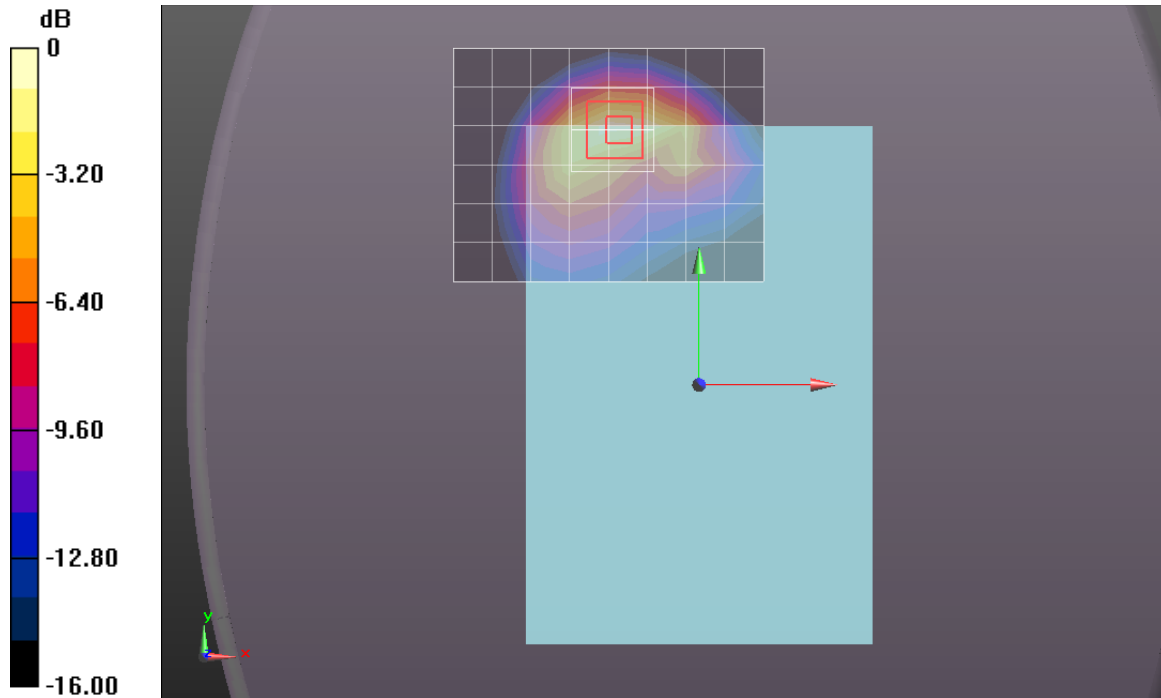

0 dB = 1.630mW/g = 4.24 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 9/17/2012

CDMA BC0


Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEV-DO_Rev. B_3 Carrier Mini._Ch 384 w/ Pwr back-off (Pri.) (0 mm)/Z Scan

(1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.461 mW/g

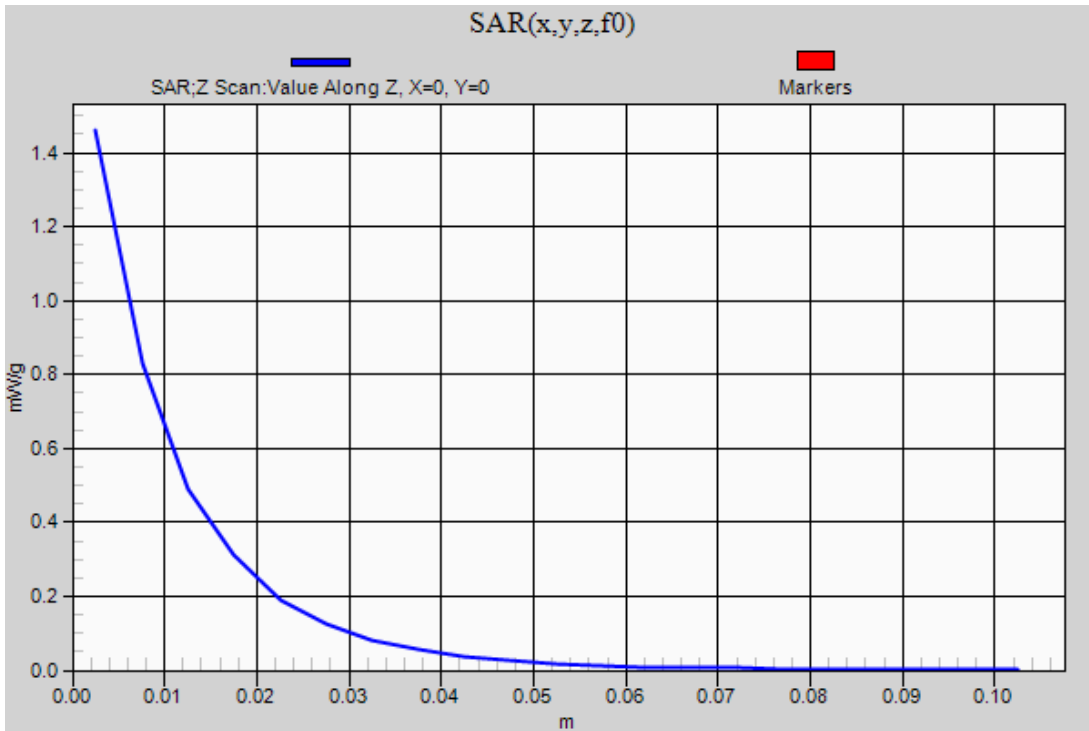

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ mho/m; $\epsilon_r = 51.603$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xRTT_RC3 SO32_Ch 600 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.185 mW/g

Rear/1xRTT_RC3 SO32_Ch 600 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.120 V/m; Power Drift = -0.0059 dB

Peak SAR (extrapolated) = 2.3240

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.537 mW/g

Maximum value of SAR (measured) = 1.723 mW/g

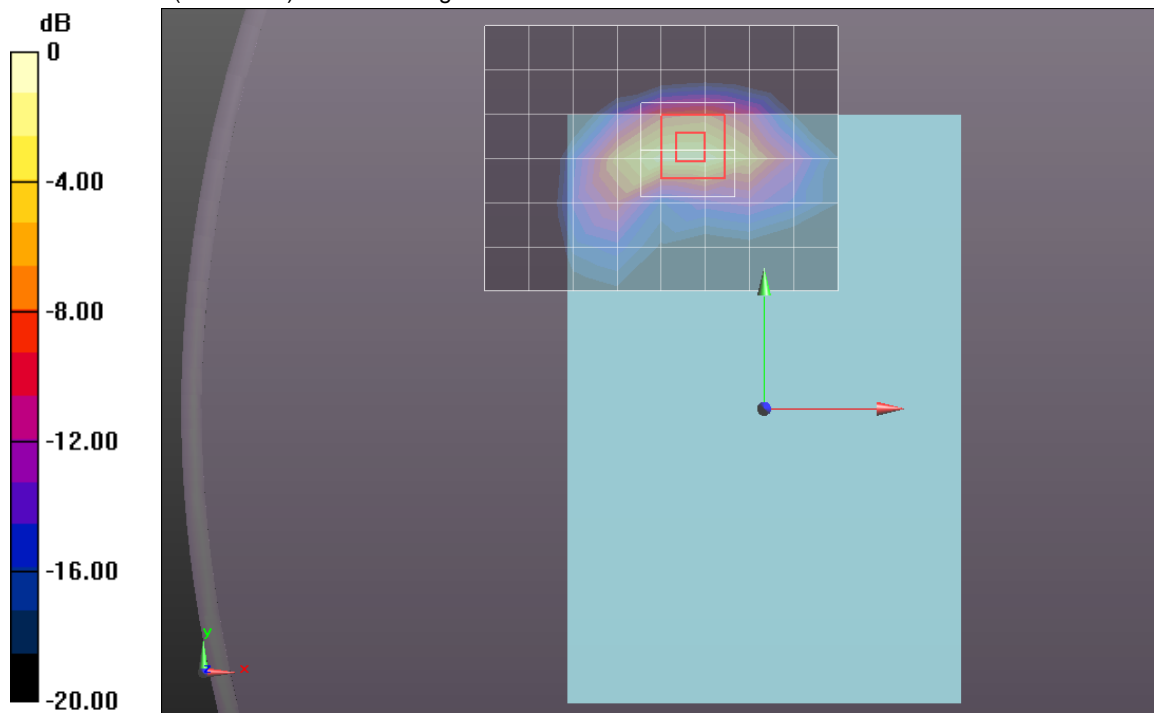

0 dB = 1.720mW/g = 4.71 dB mW/g

Test Laboratory: UL CCS SAR Lab C

Date: 8/31/2012


CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/1xRTT_RC3 SO32_Ch 600 w/ Pwr back-off (0 mm)/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.444 mW/g

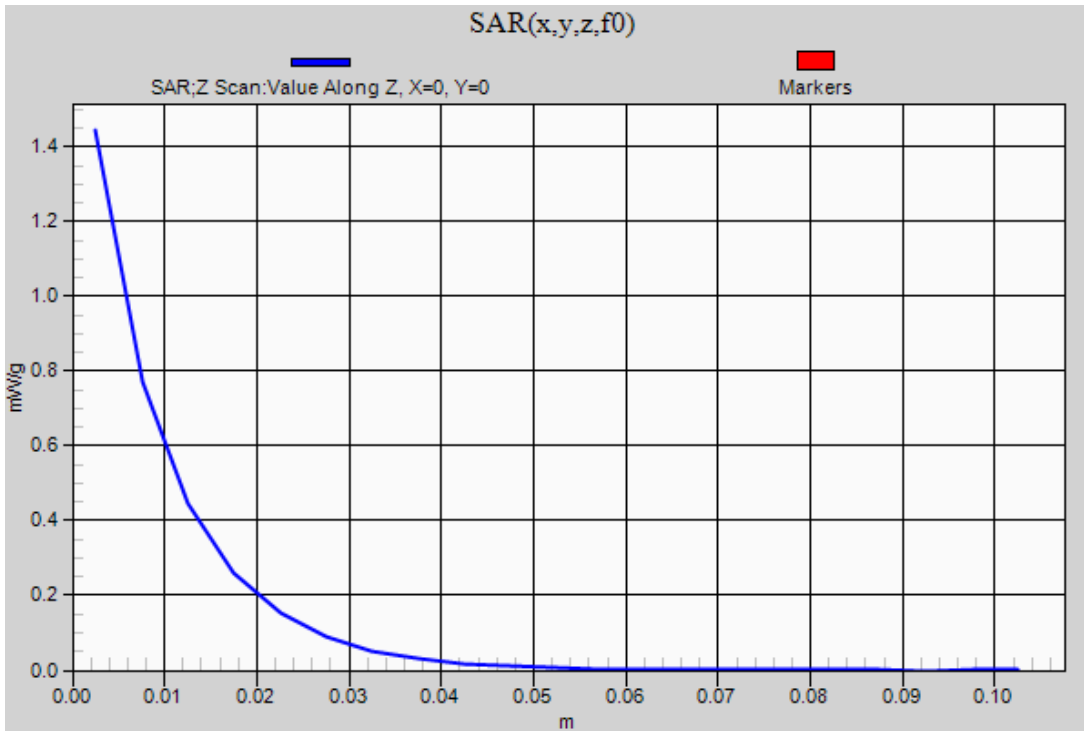

Test Laboratory: UL CCS SAR Lab C

Date: 9/5/2012

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.499$ mho/m; $\epsilon_r = 52.068$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xEVDO_Rel.0_Ch 600 w /Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.417 mW/g

Rear/1xEVDO_Rel.0_Ch 600 w /Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.206 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.2190

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.499 mW/g

Maximum value of SAR (measured) = 1.618 mW/g

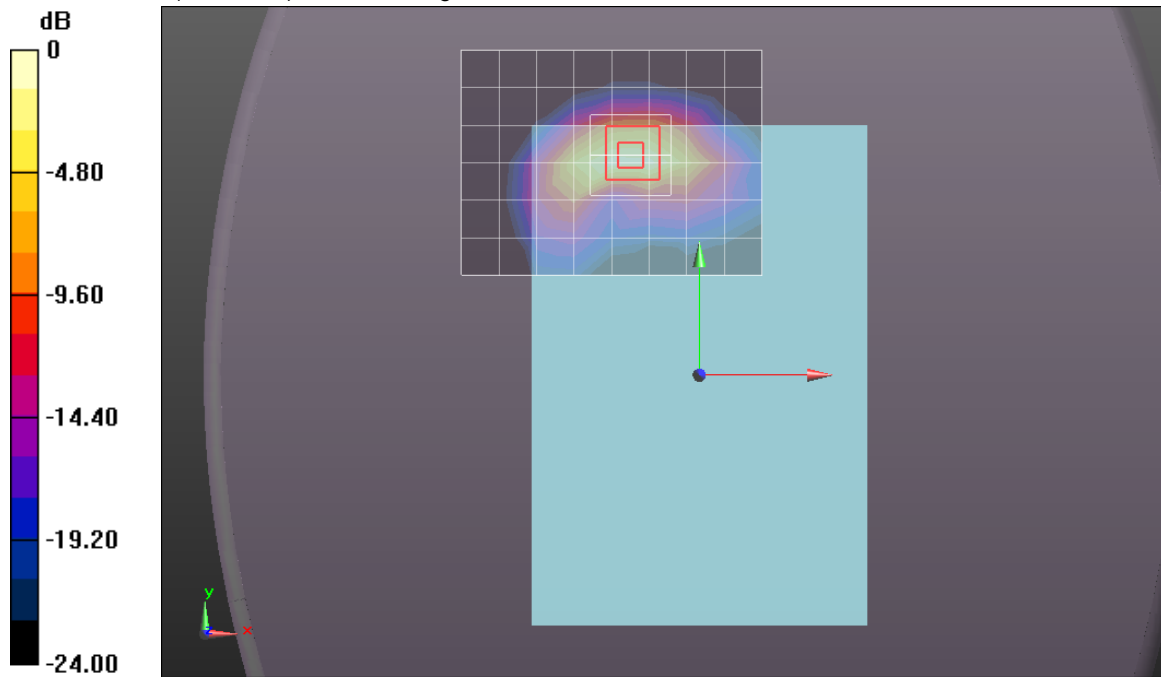

0 dB = 1.620mW/g = 4.19 dB mW/g


CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/1xEVDO_Rel.0_Ch 600 w /Pwr back-off (0 mm)/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.429 mW/g

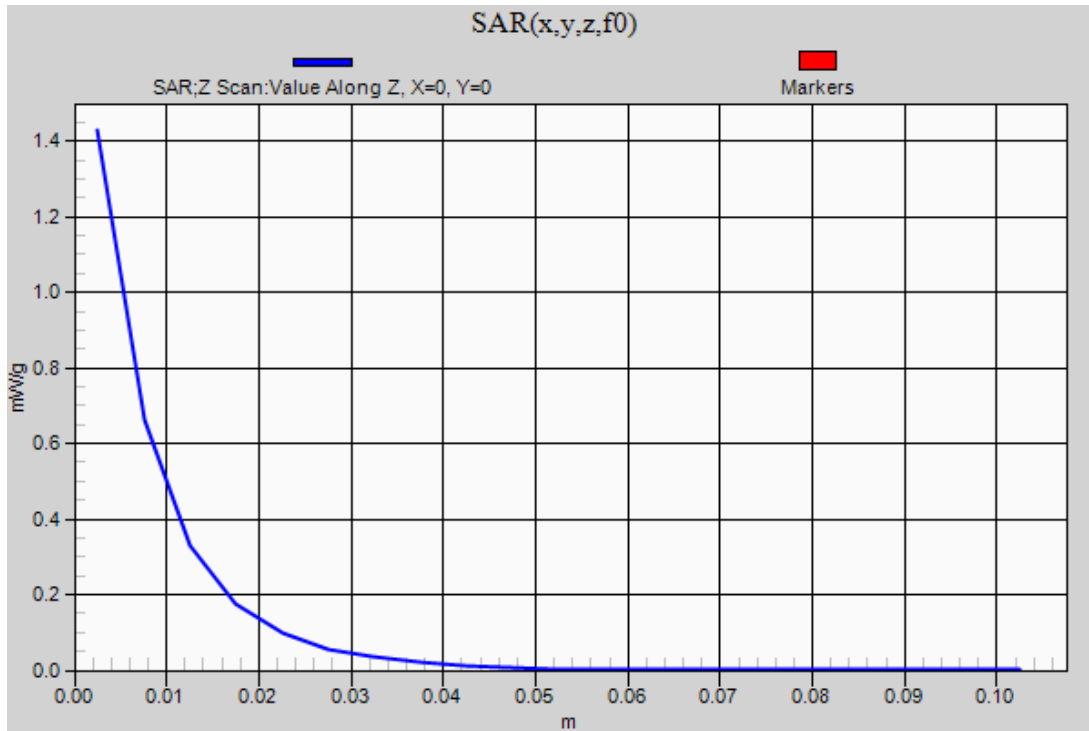

Test Laboratory: UL CCS SAR Lab B Date: 9/8/2012

CDMA BC10

Frequency: 820.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 820.5$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 54.057$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xRTT_RC3 SO32_Ch 580 w/ Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1):

Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.323 mW/g

Rear/1xRTT_RC3 SO32_Ch 580 w/ Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.483 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.3250

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.617 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.642 mW/g

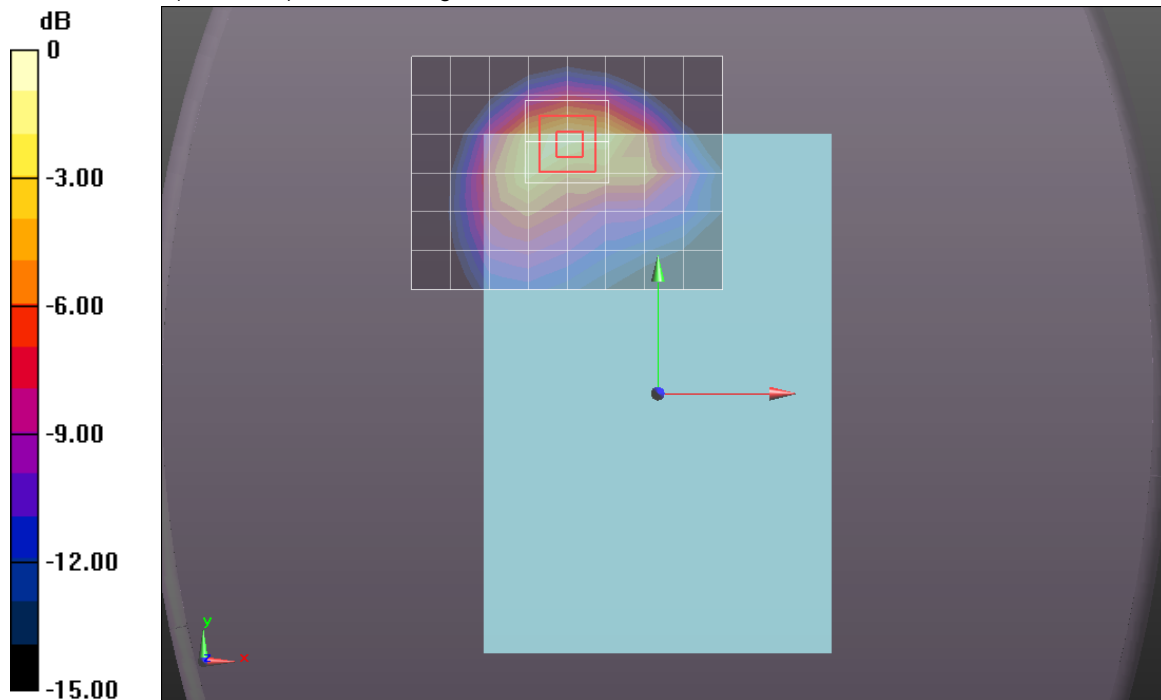

0 dB = 1.640mW/g = 4.30 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 9/8/2012

CDMA BC10


Frequency: 820.5 MHz; Duty Cycle: 1:1

Rear/1xRTT_RC3 SO32_Ch 580 w/ Pwr back-off (Pri.) (0 mm)/Z Scan (1x1x21): Measurement

grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.336 mW/g

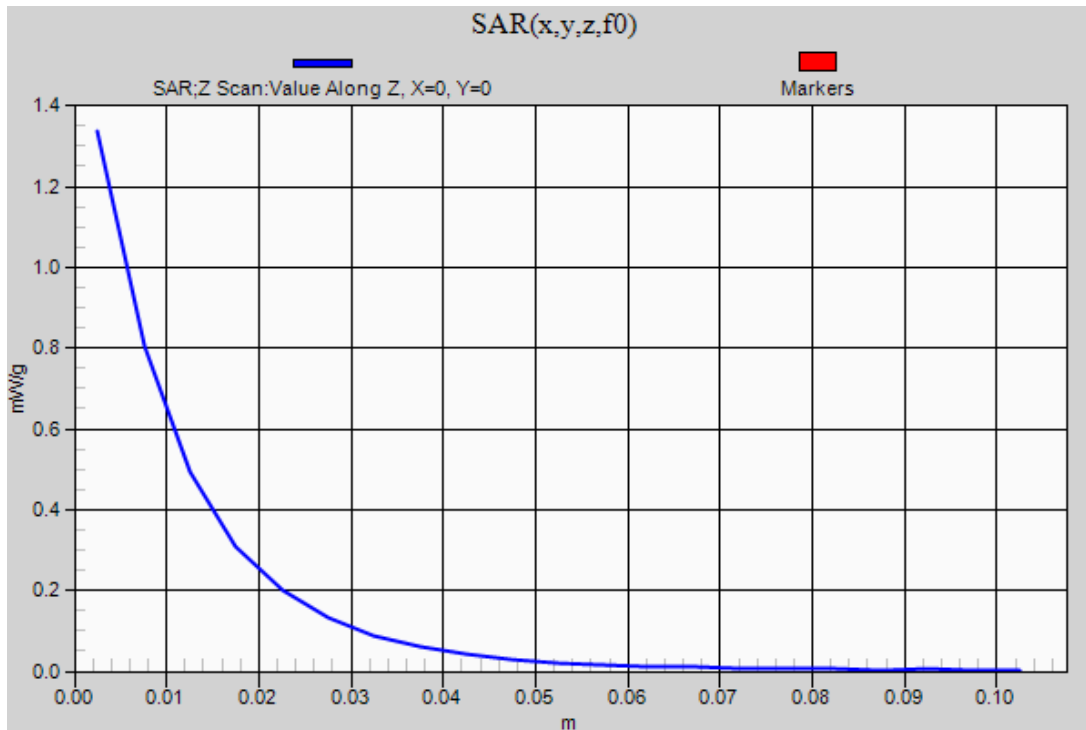

Test Laboratory: UL CCS SAR Lab B Date: 9/7/2012

CDMA BC10

Frequency: 820.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 820.5$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 53.314$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/1xEVDO_Rel 0_Ch 580 w/Pwr back-off (Pri.) (0 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.548 mW/g

Rear/1xEVDO_Rel 0_Ch 580 w/Pwr back-off (Pri.) (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.554 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.2920

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.597 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.632 mW/g

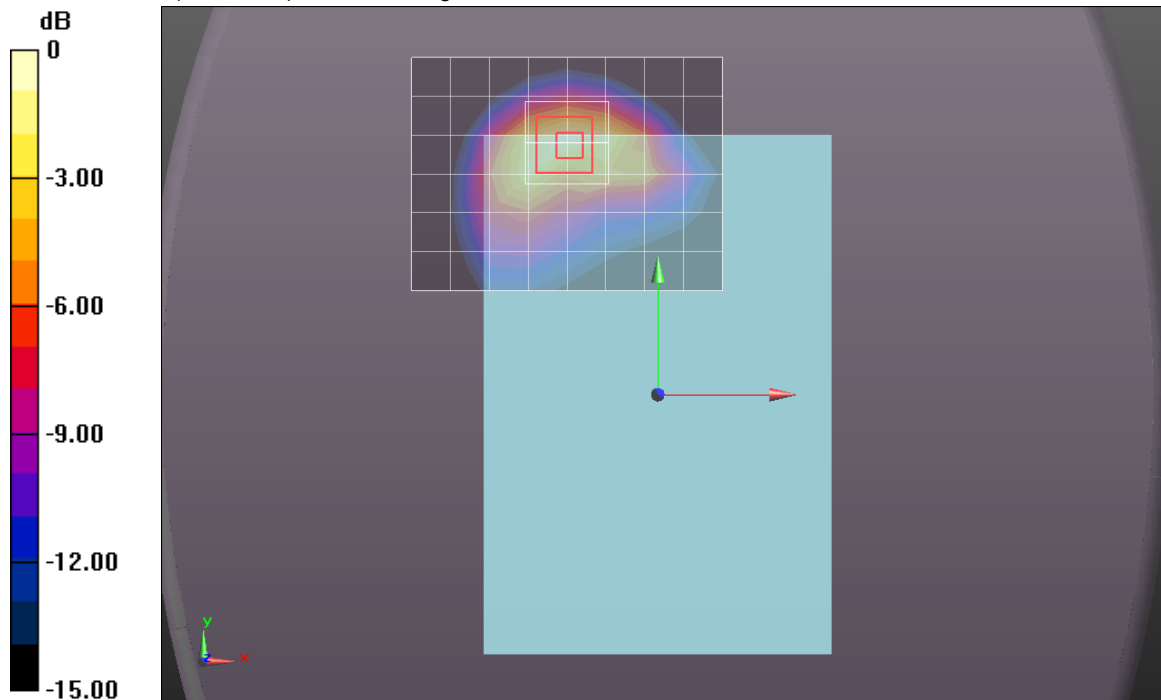

0 dB = 1.630mW/g = 4.24 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 9/7/2012

CDMA BC10


Frequency: 820.5 MHz; Duty Cycle: 1:1

Rear/1xEVDO_Rel 0_Ch 580 w/Pwr back-off (Pri.) (0 mm)/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.355 mW/g

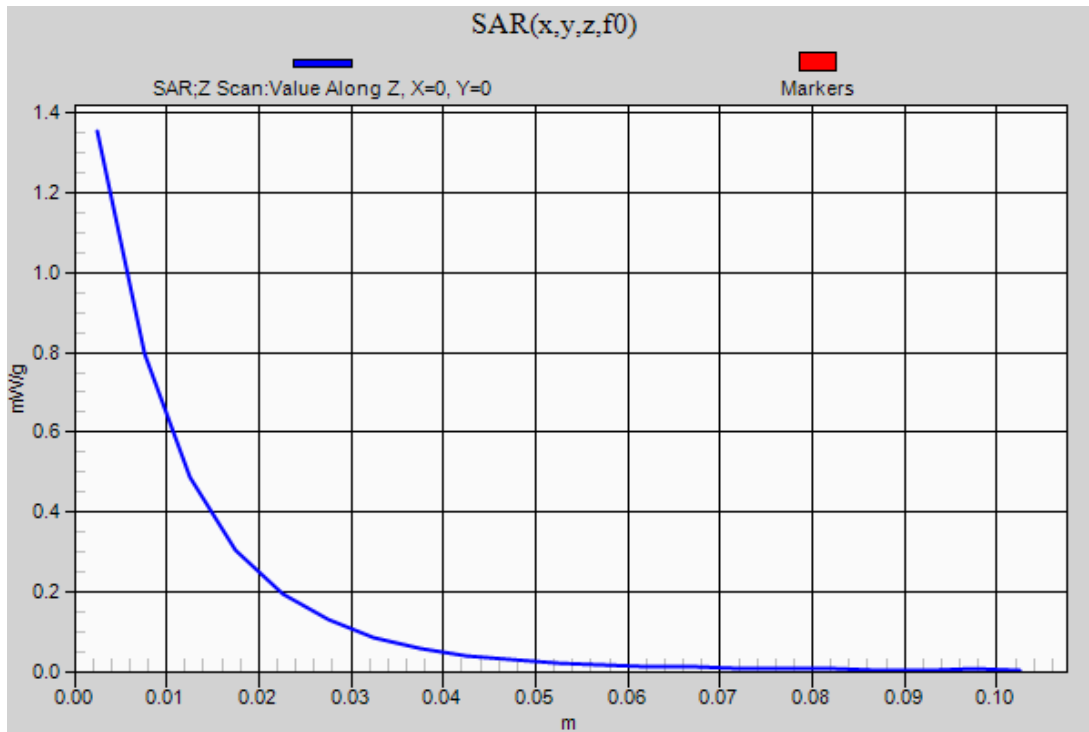

Test Laboratory: UL CCS SAR Lab B Date: 8/27/2012

LTE Band 5

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.353$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(8.73, 8.73, 8.73); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/QPSK_RB# 1, 24_Ch 20525 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.270 mW/g

Rear/QPSK_RB# 1, 24_Ch 20525 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 36.583 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.3140

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.610 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.590 mW/g

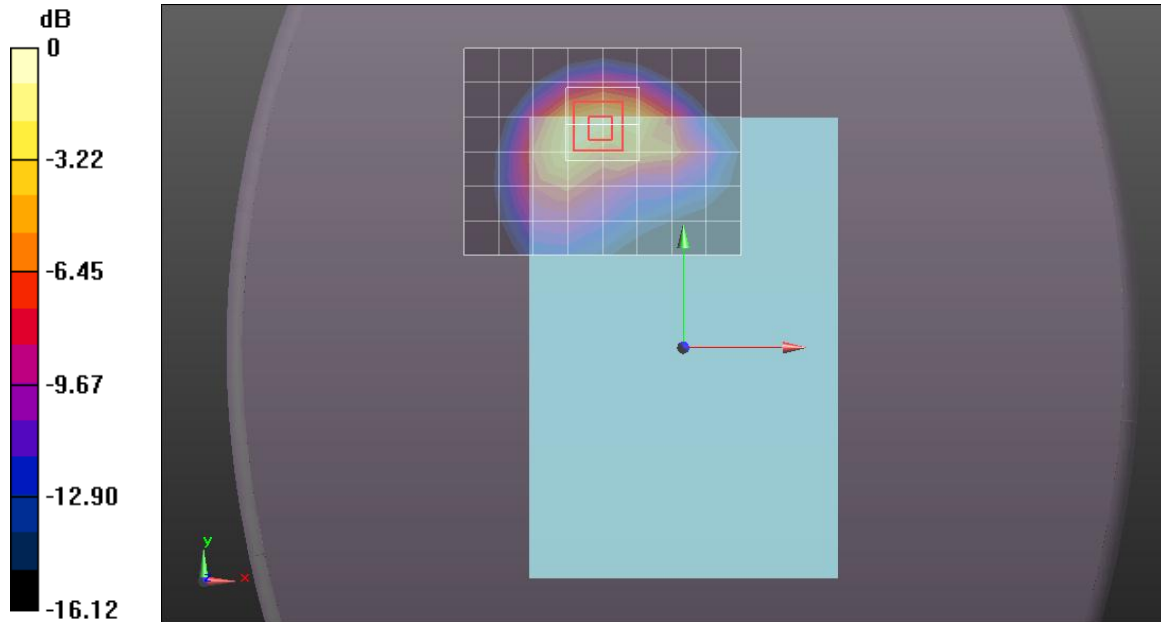

0 dB = 1.590mW/g = 4.03 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 8/27/2012

LTE Band 5


Frequency: 836.5 MHz; Duty Cycle: 1:1

Rear/QPSK_RB# 1, 24_Ch 20525 w/ Pwr back-off (0 mm)/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.271 mW/g

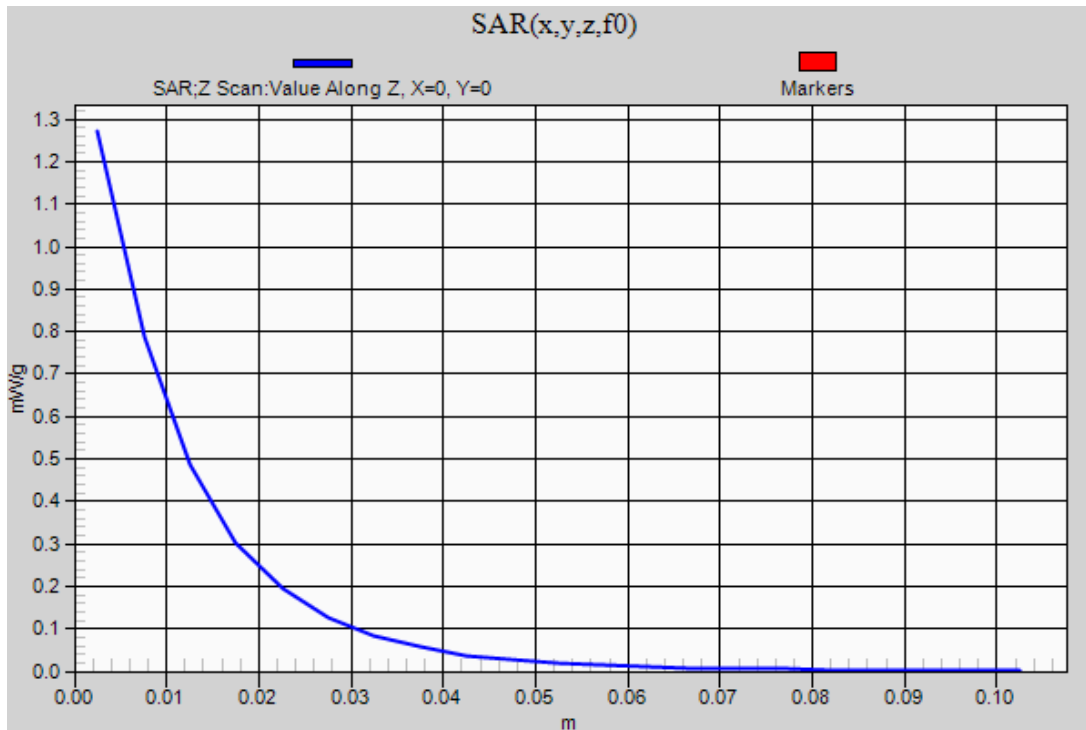

LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 55.465$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(8.94, 8.94, 8.94); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Rear/QPSK_RB# 25,12_Ch 782 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement

grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.151 mW/g

Rear/QPSK_RB# 25,12_Ch 782 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 34.286 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.3680

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.610 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.656 mW/g

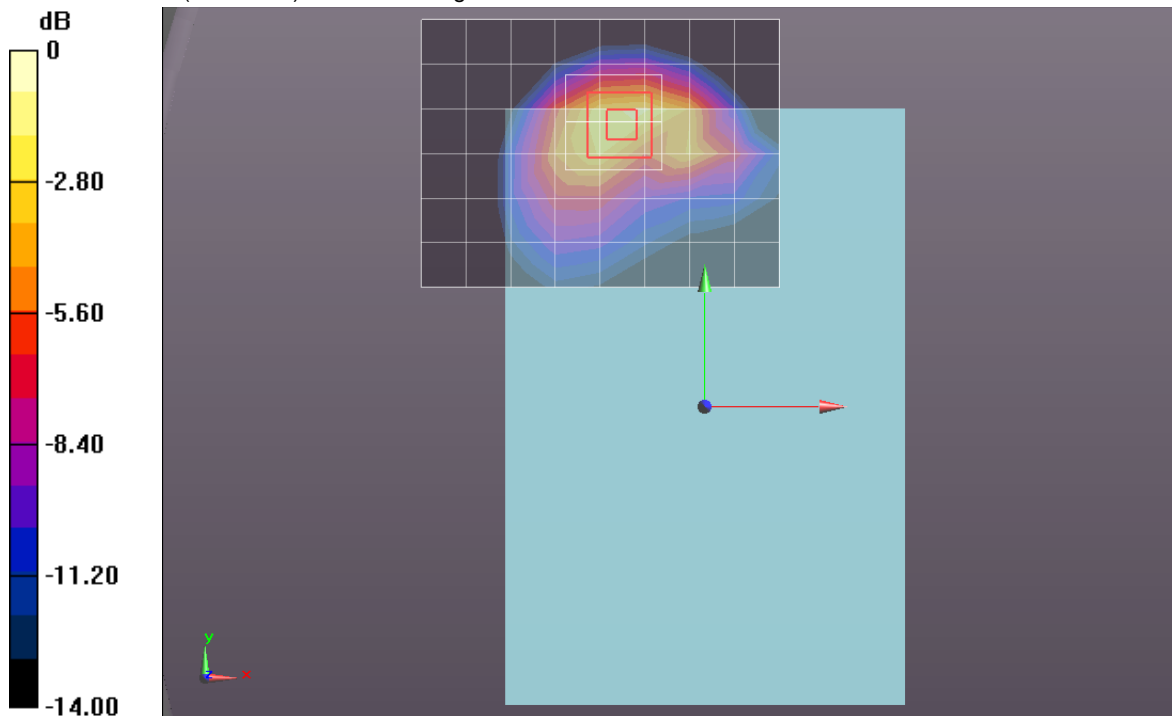

0 dB = 1.660mW/g = 4.40 dB mW/g

LTE Band 13


Frequency: 782 MHz; Duty Cycle: 1:1

Rear/QPSK_RB# 25,12_Ch 782 w/ Pwr back-off (0 mm)/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.138 mW/g

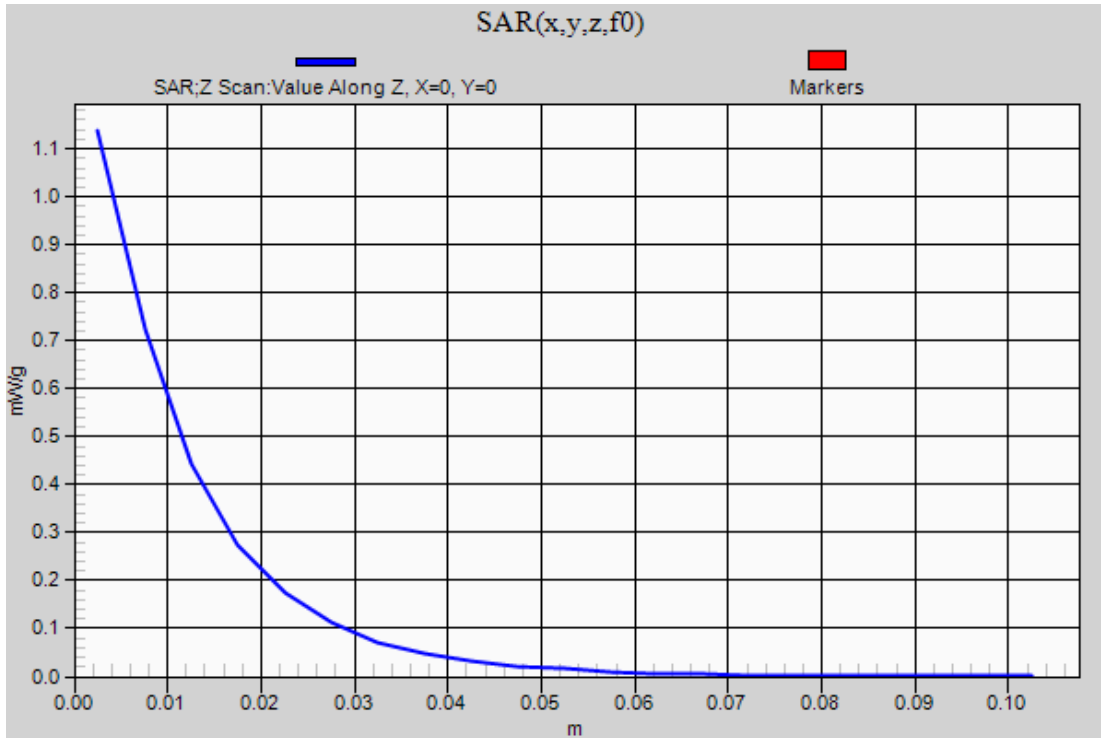

Test Laboratory: UL CCS SAR Lab C

Date: 8/28/2012

LTE Band 25

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 51.726$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(7.11, 7.11, 7.11); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/QPSK_RB# 100, 0_Ch 26140 w/ Pwr back-off (0 mm)/Area Scan (9x7x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.150 mW/g

Rear/QPSK_RB# 100, 0_Ch 26140 w/ Pwr back-off (0 mm)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.377 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.2550

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.532 mW/g

Maximum value of SAR (measured) = 1.666 mW/g

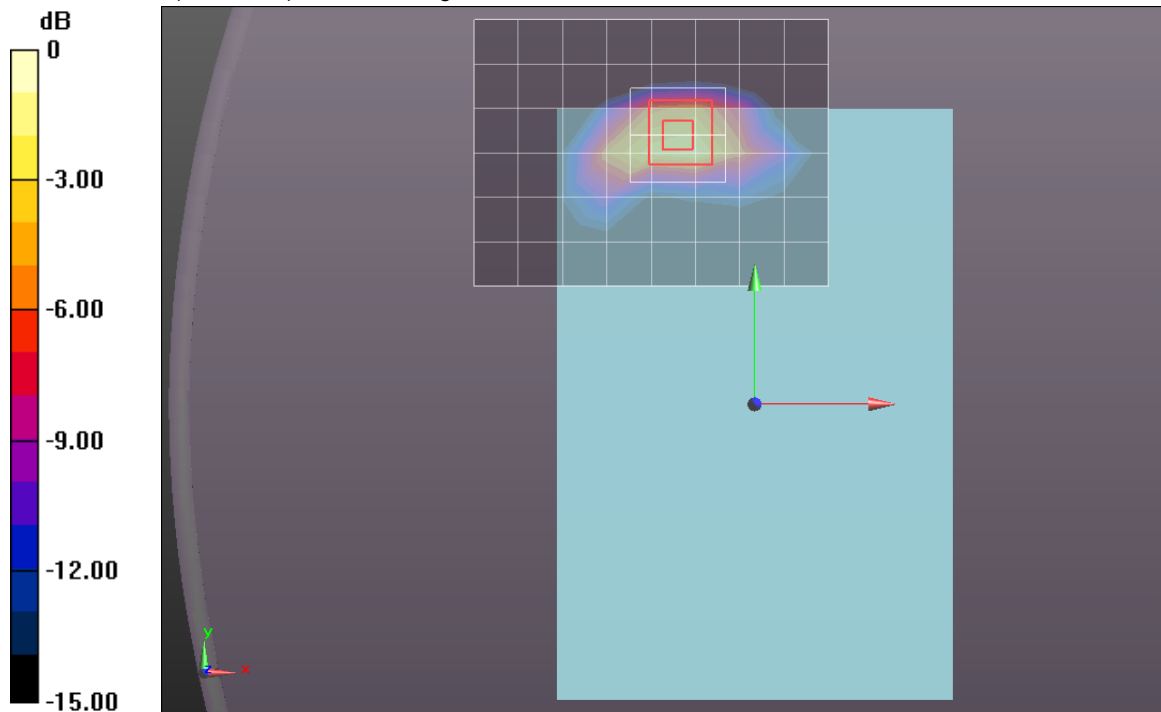

0 dB = 1.670mW/g = 4.45 dB mW/g


LTE Band 25

Frequency: 1860 MHz; Duty Cycle: 1:1

Rear/QPSK_RB# 100, 0_Ch 26140 w/ Pwr back-off (0 mm)/Z Scan (1x1x21): Measurement grid

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.024 mW/g

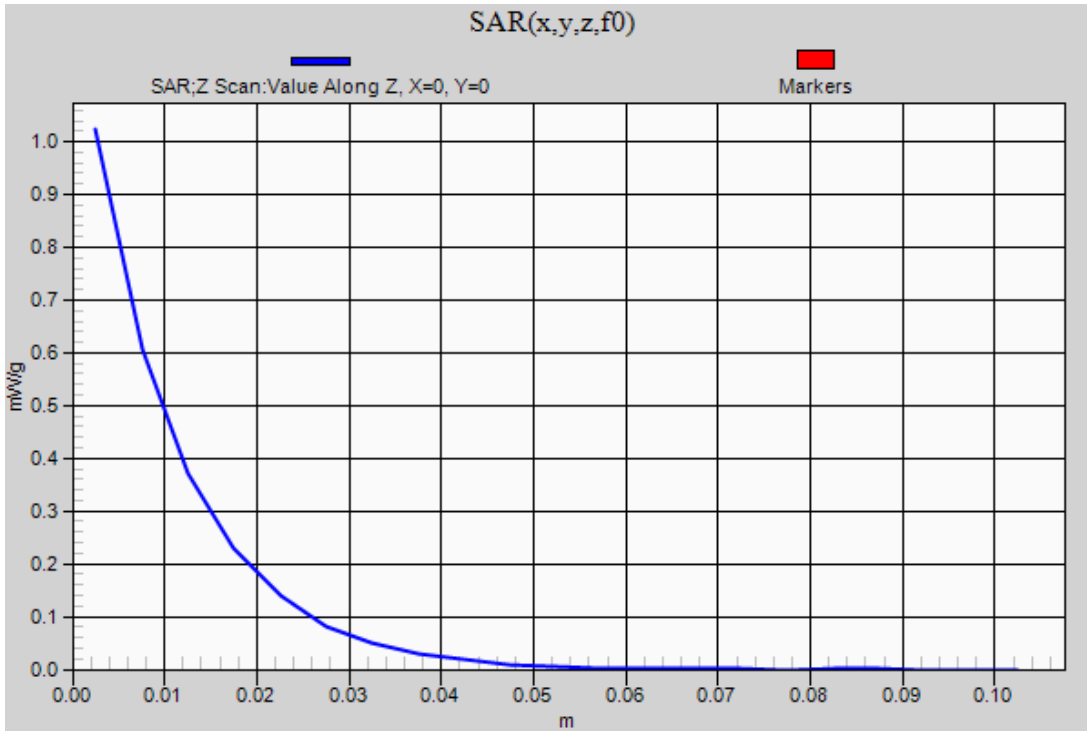

Test Laboratory: UL CCS SAR Lab C

Date: 8/15/2012

WiFi 2.4GHz (Primary Antenna)

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.962$ mho/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(6.67, 6.67, 6.67); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/802.11b_ch 11/Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.062 mW/g

Edge 3/802.11b_ch 11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 23.146 V/m; Power Drift = 0.0031 dB

Peak SAR (extrapolated) = 3.3290

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.324 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.794 mW/g

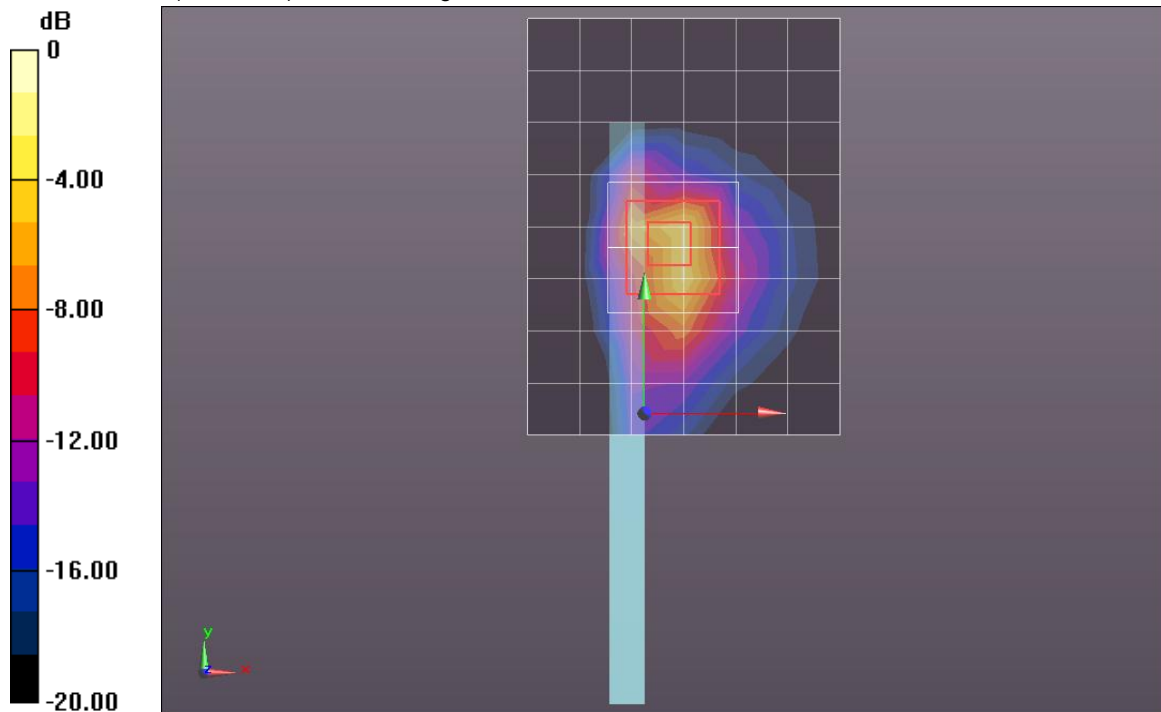

0 dB = 1.790mW/g = 5.06 dB mW/g

Test Laboratory: UL CCS SAR Lab C

Date: 8/16/2012


WiFi 2.4GHz (Primary Antenna)

Frequency: 2462 MHz; Duty Cycle: 1:1

Edge 3/802.11b_ch 11/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.049 mW/g

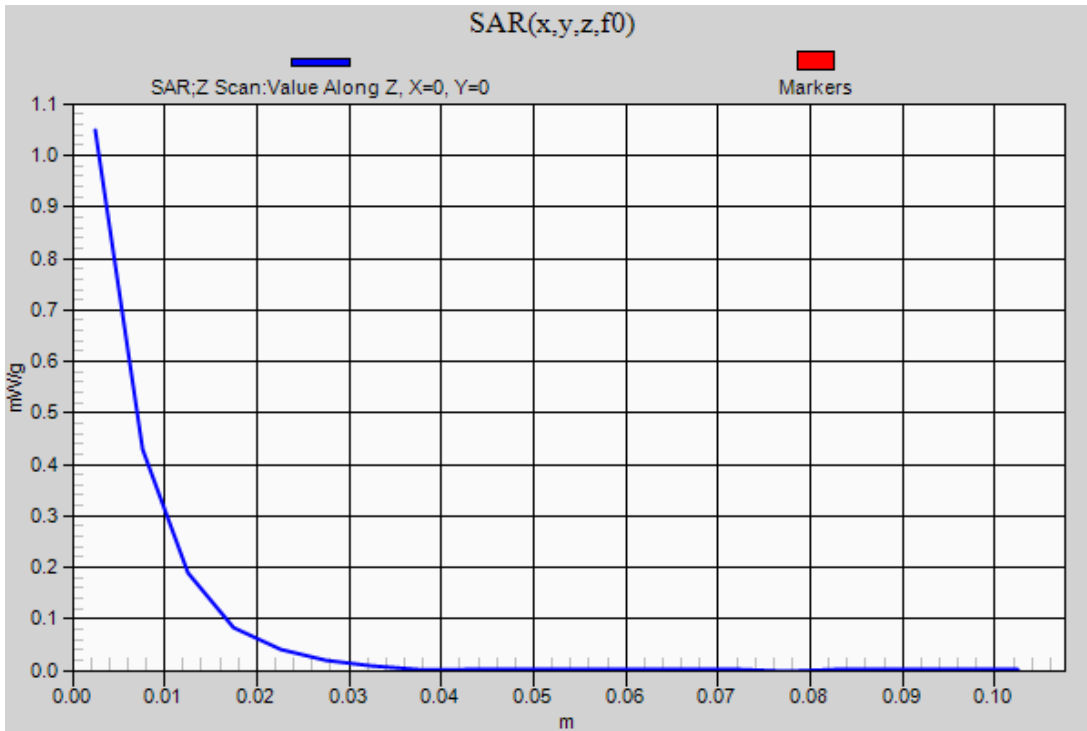

Test Laboratory: UL CCS SAR Lab A

Date: 9/5/2012

Bluetooth 2.4GHz (Primary Antenna)

Frequency: 2441 MHz; Duty Cycle: 1:3.43954; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.903$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(6.65, 6.65, 6.65); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3_ch 39/Area Scan (7x14x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.451 mW/g

Edge 3_ch 39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 15.485 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.1930

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.133 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.637 mW/g

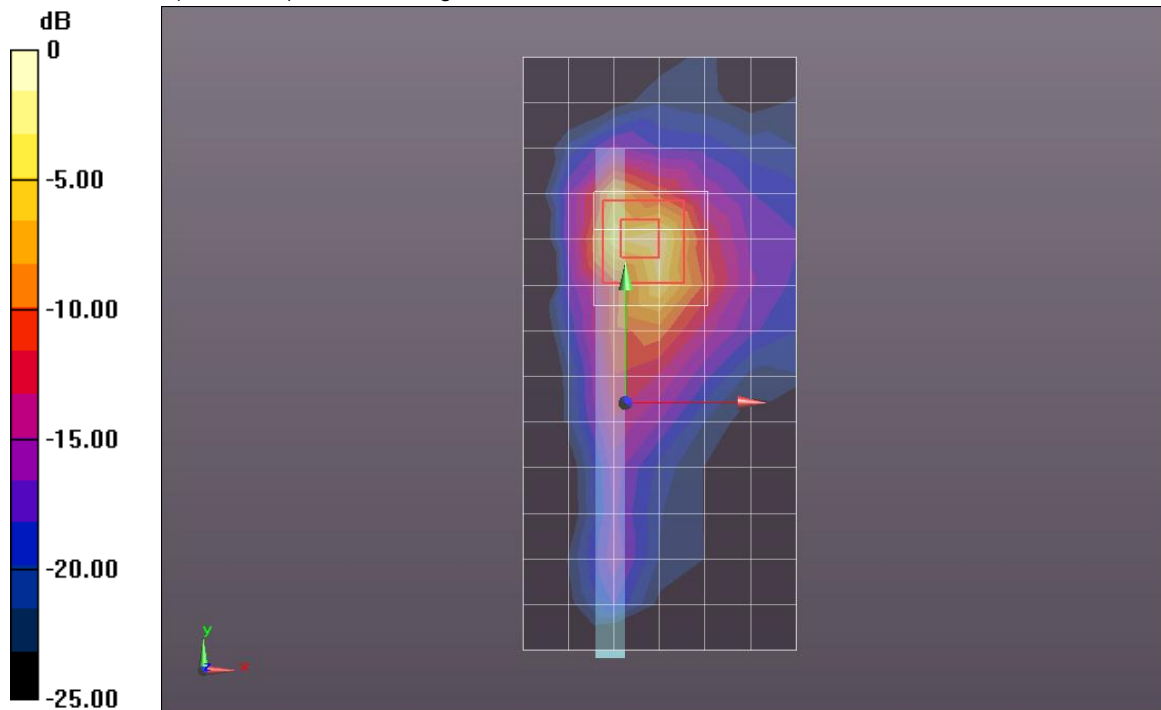

0 dB = 0.640mW/g = -3.88 dB mW/g

Test Laboratory: UL CCS SAR Lab A

Date: 9/5/2012


Bluetooth 2.4GHz (Primary Antenna)

Frequency: 2441 MHz; Duty Cycle: 1:3.43954

Edge 3_ch 39/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.453 mW/g

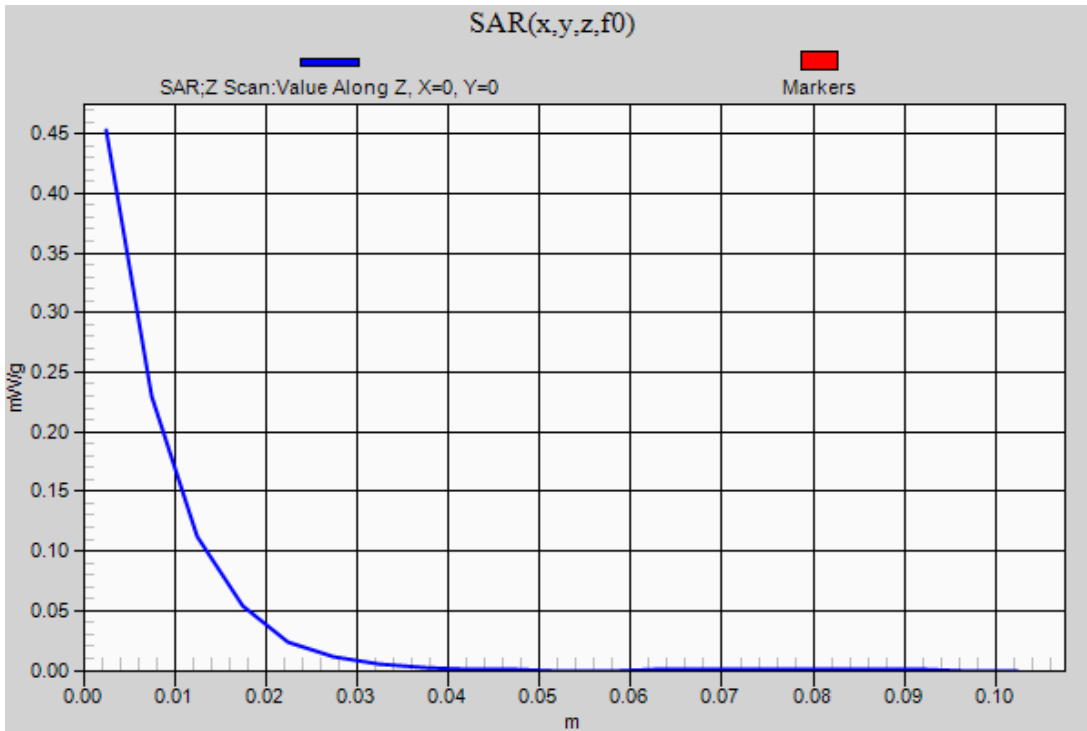

Test Laboratory: UL CCS SAR Lab A

Date: 8/29/2012

WiFi 5.2GHz (Secondary Antenna)

Frequency: 5230 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5230$ MHz; $\sigma = 5.306$ mho/m; $\epsilon_r = 47.177$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Edge 3/802.11n HT40_ch 46/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.604 mW/g


Edge 3/802.11n HT40_ch 46/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.150 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 3.8810

SAR(1 g) = 0.969 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 1.859 mW/g

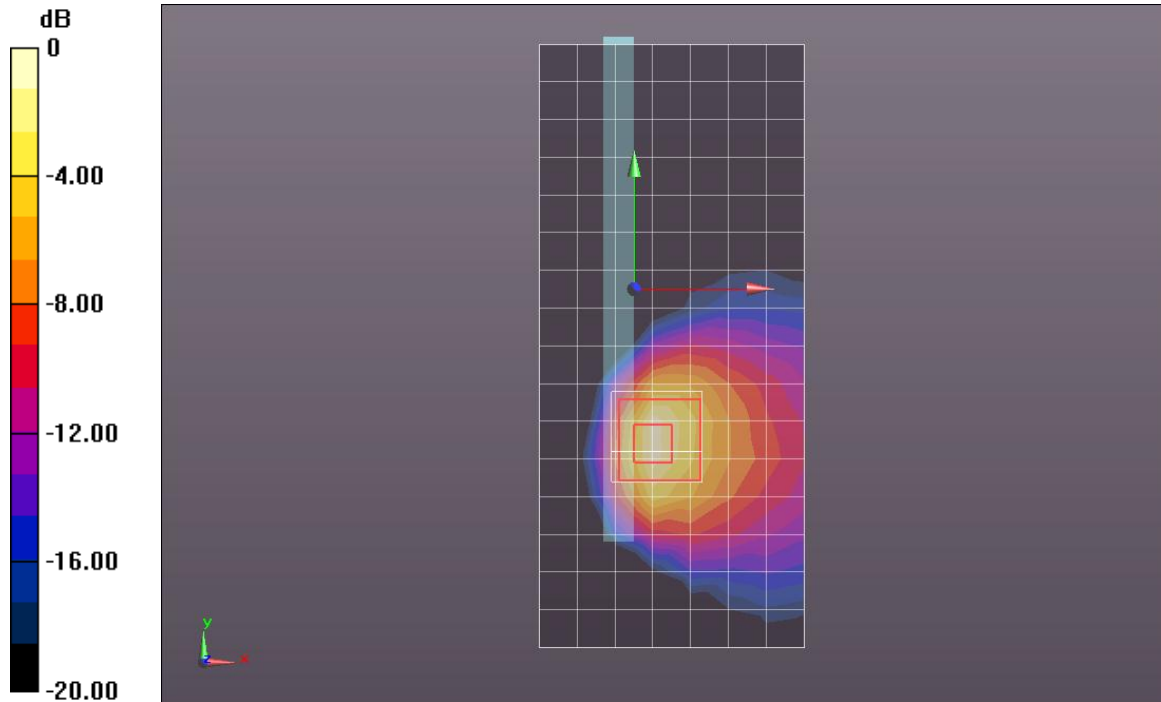

0 dB = 1.860mW/g = 5.39 dB mW/g


Test Laboratory: UL CCS SAR Lab A

Date: 8/29/2012

WiFi 5.2GHz (Secondary Antenna)

Frequency: 5230 MHz; Duty Cycle: 1:1

Edge 3/802.11n HT40_ch 46/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.507 mW/g

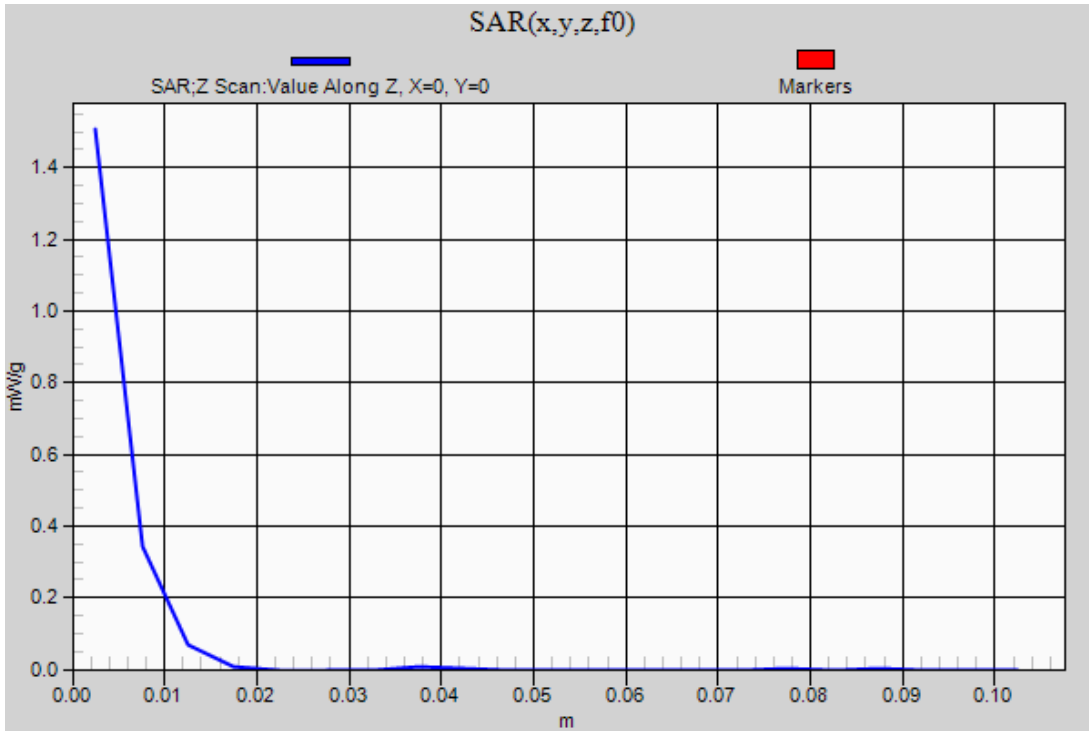

Test Laboratory: UL CCS SAR Lab A

Date: 8/16/2012

WiFi 5.3GHz (Secondary Antenna)


Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5260$ MHz; $\sigma = 5.407$ mho/m; $\epsilon_r = 48.424$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Edge 3/802.11a_ch 52/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.762 mW/g

Edge 3/802.11a_ch 52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 19.652 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 4.4980
SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.400 mW/g
Maximum value of SAR (measured) = 2.199 mW/g

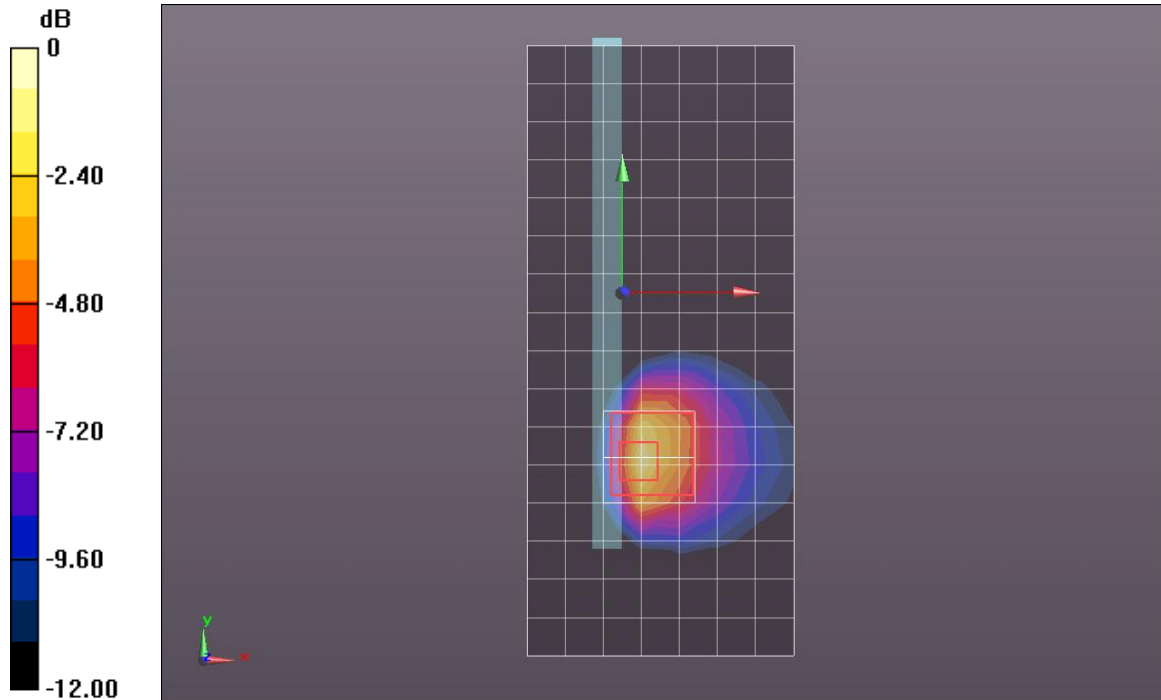

0 dB = 2.200mW/g = 6.85 dB mW/g


Test Laboratory: UL CCS SAR Lab A

Date: 8/16/2012

WiFi 5.3GHz (Secondary Antenna)

Frequency: 5260 MHz; Duty Cycle: 1:1

Edge 3/802.11a_ch 52/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.845 mW/g

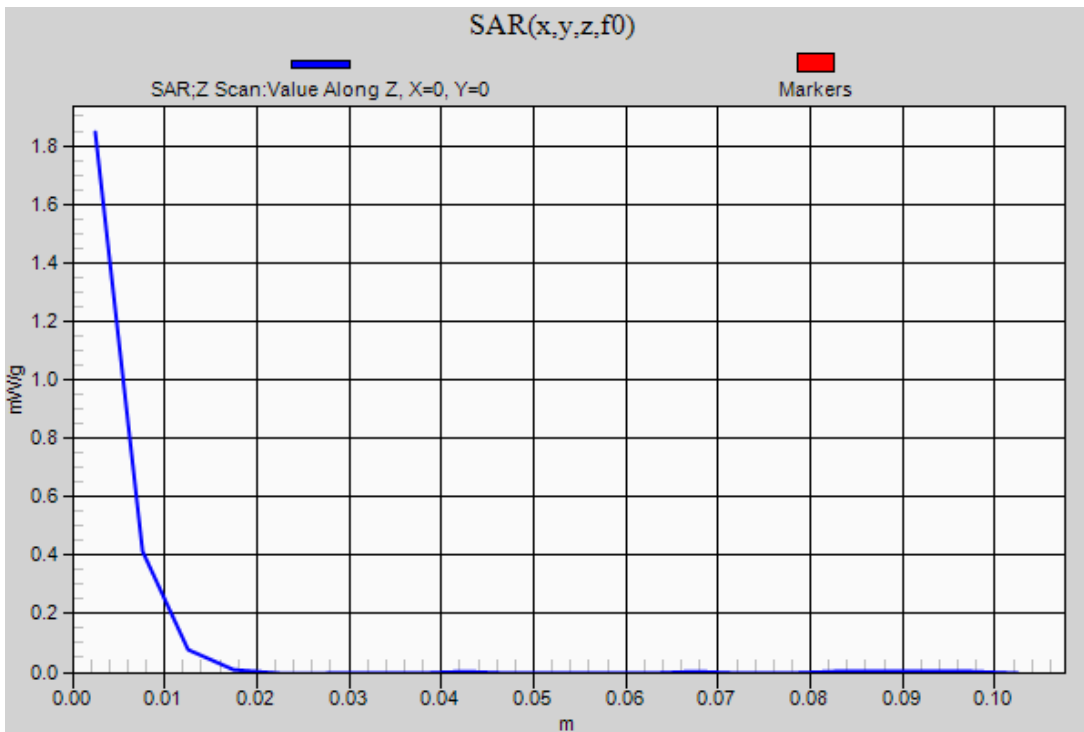

Test Laboratory: UL CCS SAR Lab B Date: 8/7/2012

WiFi 5.5GHz (Secondary Antenna)

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.817$ mho/m; $\epsilon_r = 48.719$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(3.62, 3.62, 3.62); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 3/802.11a_ch 104/Area Scan (8x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.601 mW/g


Edge 3/802.11a_ch 104/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.031 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.4850

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 2.274 mW/g

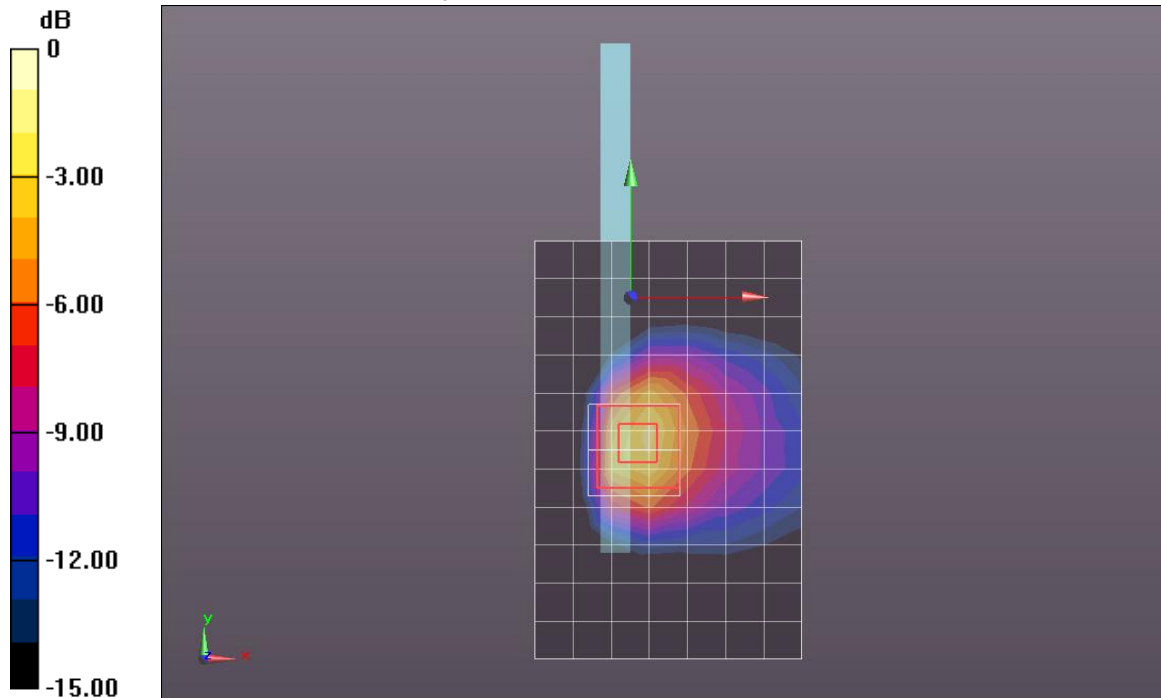


0 dB = 2.270mW/g = 7.12 dB mW/g

Test Laboratory: UL CCS SAR Lab B Date: 8/7/2012

WiFi 5.5GHz (Secondary Antenna)

Frequency: 5520 MHz; Duty Cycle: 1:1

Edge 3/802.11a_ch 104/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.602 mW/g

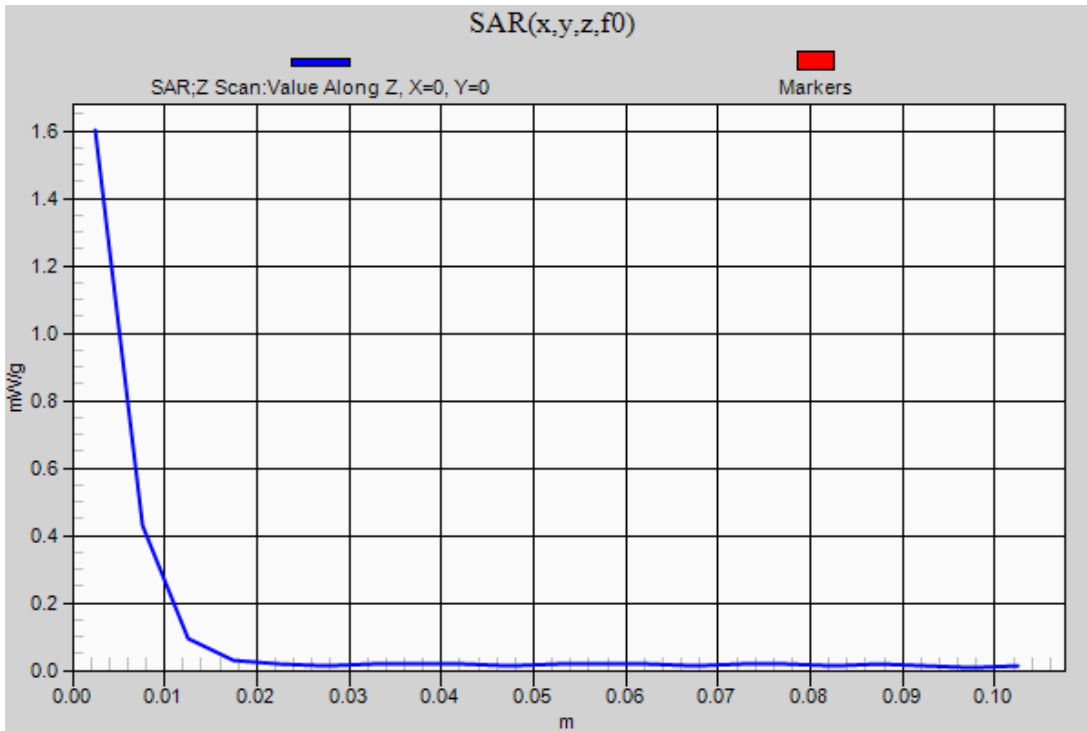

Test Laboratory: UL CCS SAR Lab C

Date: 8/9/2012

WiFi 5.8GHz (Secondary Antenna)

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.143 \text{ mho/m}$; $\epsilon_r = 49.718$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1239; Calibrated: 6/6/2012
- Probe: EX3DV4 - SN3773; ConvF(3.57, 3.57, 3.57); Calibrated: 3/14/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

Edge 3/802.11a_ch 157/Area Scan (8x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.851 mW/g


Edge 3/802.11a_ch 157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 19.076 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 4.7120

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 2.276 mW/g

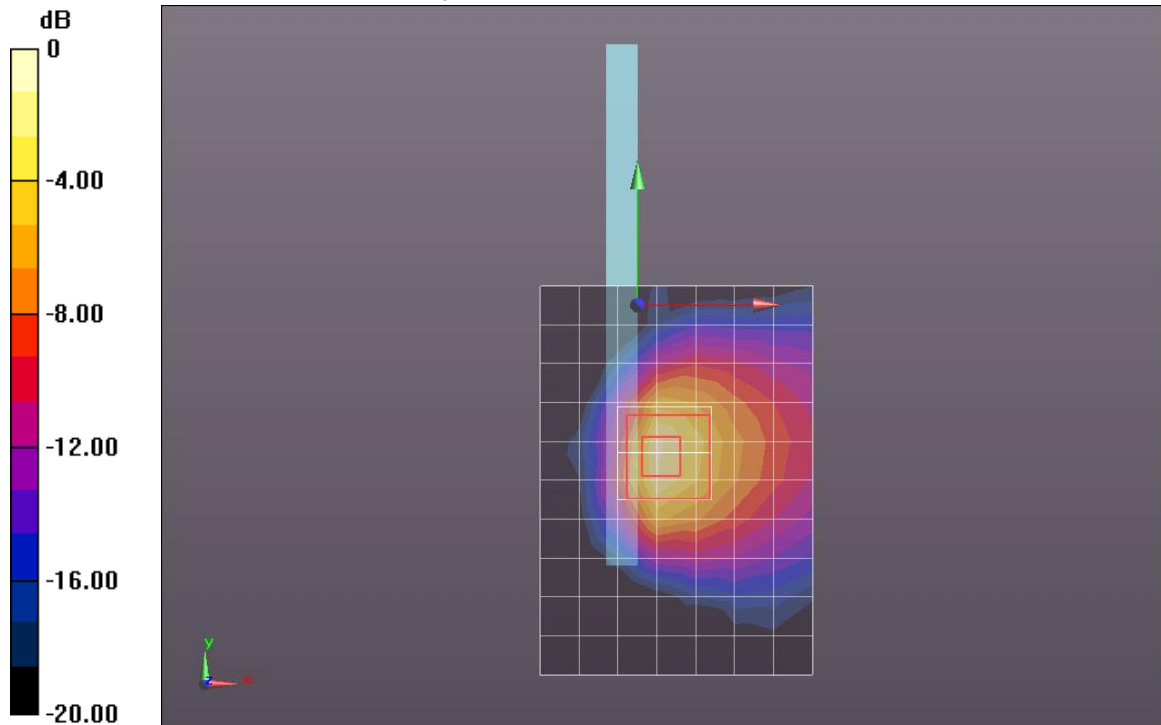


0 dB = 2.280mW/g = 7.16 dB mW/g

WiFi 5.8GHz (Secondary Antenna)

Frequency: 5785 MHz; Duty Cycle: 1:1

Edge 3/802.11a_ch 157/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.879 mW/g

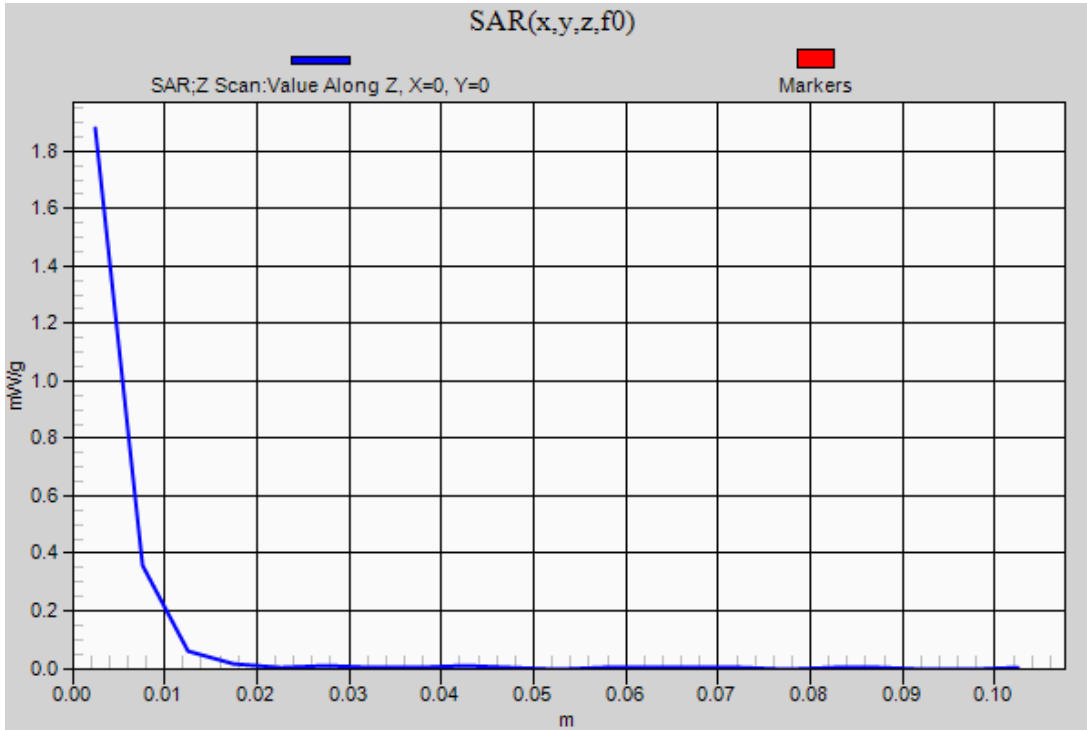

15. Simultaneous Transmission SAR Analysis

15.1. Sum of the SAR for GSM, W-CDMA, CDMA, LTE and WiFi 2.4 GHz

Sum of the SAR with Measured Values (WiFi Primary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 2.4 GHz	
Rear	1.160										0.067	1.227
		1.160									0.067	1.227
			1.170								0.067	1.237
				1.170							0.067	1.237
					1.190						0.067	1.257
						1.190					0.067	1.257
							1.170				0.067	1.237
								1.170			0.067	1.237
Edge 1	0.985										0	0.985
		0.891									0	0.891
			0.591								0	0.591
				0.872							0	0.872
					0.752						0	0.752
						0.933					0	0.933
							0.760				0	0.760
								0.737			0	0.737
Edge 2									0.618		0	0.618
										0.976	0	0.976
	0.482										0	0.482
		0.730									0	0.730
			0.498								0	0.498
				0.686							0	0.686
					0.573						0	0.573
						0.768					0	0.768
Edge 3							0.559				0	0.559
								0.476			0	0.476
									0.343		0	0.343
										0.792	0	0.792
	0										1.070	1.070
		0									1.070	1.070
			0								1.070	1.070
				0							1.070	1.070
Edge 4					0						1.070	1.070
						0					1.070	1.070
	0										0.158	0.158
		0									0.158	0.158
			0								0.158	0.158
				0							0.158	0.158
					0						0.158	0.158
						0					0.158	0.158
Edge 4							0				0.158	0.158
								0			0.158	0.158
									0		0.158	0.158
										0	0.158	0.158
											0.158	0.158
											0.158	0.158
											0.158	0.158
											0.158	0.158

Sum of the SAR with Measured Values (WiFi Secondary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)	
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 2.4 GHz		
Rear	1.160											0.024	1.184
		1.160										0.024	1.184
			1.170									0.024	1.194
				1.170								0.024	1.194
					1.190							0.024	1.214
						1.190						0.024	1.214
							1.170					0.024	1.194
								1.170				0.024	1.194
Edge 1	0.985											0	0.985
		0.891										0	0.891
			0.591									0	0.591
				0.872								0	0.872
					0.752							0	0.752
						0.933						0	0.933
							0.760					0	0.760
								0.737				0	0.737
Edge 2	0.482											0.014	0.496
		0.730										0.014	0.744
			0.498									0.014	0.512
				0.686								0.014	0.700
					0.573							0.014	0.587
						0.768						0.014	0.782
							0.559					0.014	0.573
								0.476				0.014	0.490
Edge 3	0											0.014	0.357
												0.014	0.806
		0										0.505	0.505
			0									0.505	0.505
				0								0.505	0.505
					0							0.505	0.505
						0						0.505	0.505
							0					0.505	0.505
Edge 4	0											0	0
		0										0	0
			0									0	0
				0								0	0
					0							0	0
						0						0	0
							0					0	0
								0				0	0

Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.3 for all circumstances that require SPLSR calculation.

15.2. Sum of the SAR for GSM, W-CDMA, CDMA, LTE and Bluetooth

Sum of the SAR with Measured Values (Bluetooth Primary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)	
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	Bluetooth		
Rear	1.160											0.029	1.189
		1.160										0.029	1.189
			1.170									0.029	1.199
				1.170								0.029	1.199
					1.190							0.029	1.219
						1.190						0.029	1.219
							1.170					0.029	1.199
								1.170				0.029	1.199
									1.180			0.029	1.209
Edge 1	0.985											0	0.985
		0.891										0	0.891
			0.591									0	0.591
				0.872								0	0.872
					0.752							0	0.752
						0.933						0	0.933
							0.760					0	0.760
								0.737				0	0.737
									0.618			0	0.618
Edge 2	0.482											0	0.482
		0.730										0	0.730
			0.498									0	0.498
				0.686								0	0.686
					0.573							0	0.573
						0.768						0	0.768
							0.559					0	0.559
								0.476				0	0.476
									0.343			0	0.343
Edge 3	0											0.395	0.395
		0										0.395	0.395
			0									0.395	0.395
				0								0.395	0.395
					0							0.395	0.395
						0						0.395	0.395
							0					0.395	0.395
								0				0.395	0.395
									0			0.395	0.395
Edge 4	0											0.079	0.079
		0										0.079	0.079
			0									0.079	0.079
				0								0.079	0.079
					0							0.079	0.079
						0						0.079	0.079
							0					0.079	0.079
								0				0.079	0.079
									0			0.079	0.079

Sum of the SAR with Measured Values (Bluetooth Secondary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	Bluetooth	
Rear	1.160										0.003	1.163
		1.160									0.003	1.163
			1.170								0.003	1.173
				1.170							0.003	1.173
					1.190						0.003	1.193
						1.190					0.003	1.193
							1.170				0.003	1.173
								1.170			0.003	1.173
Edge 1	0.985										0	0.985
		0.891									0	0.891
			0.591								0	0.591
				0.872							0	0.872
					0.752						0	0.752
						0.933					0	0.933
							0.760				0	0.760
								0.737			0	0.737
Edge 2									0.618		0	0.618
										0.976	0	0.976
	0.482										0.025	0.507
		0.730									0.025	0.755
			0.498								0.025	0.523
				0.686							0.025	0.711
					0.573						0.025	0.598
						0.768					0.025	0.793
Edge 3											0.025	0.584
							0.559				0.025	0.501
								0.476			0.025	0.501
									0.343		0.025	0.368
										0.792	0.025	0.817
	0										0.198	0.198
		0									0.198	0.198
			0								0.198	0.198
Edge 4				0							0.198	0.198
					0						0.198	0.198
						0					0.198	0.198
							0				0.198	0.198
								0			0.198	0.198
									0		0.198	0.198
										0	0.198	0.198
											0	0

Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.3 for all circumstances that require SPLSR calculation.

15.3. Sum of the SAR for GSM, W-CDMA, CDMA, LTE, WiFi 5.2 GHz

Sum of the SAR with Measured Values (WiFi Primary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 5.2 GHz	
Rear	1.160										0.077	1.237
		1.160									0.077	1.237
			1.170								0.077	1.247
				1.170							0.077	1.247
					1.190						0.077	1.267
						1.190					0.077	1.267
							1.170				0.077	1.247
								1.170			0.077	1.247
									1.180		0.077	1.257
Edge 1	0.985										0	0.985
		0.891									0	0.891
			0.591								0	0.591
				0.872							0	0.872
					0.752						0	0.752
						0.933					0	0.933
							0.760				0	0.760
								0.737			0	0.737
									0.618		0	0.618
Edge 2	0.482										0.976	0
		0.730									0	0.730
			0.498								0	0.498
				0.686							0	0.686
					0.573						0	0.573
						0.768					0	0.768
							0.559				0	0.559
								0.476			0	0.476
									0.343		0	0.343
Edge 3	0										0.792	0
		0									0.836	0.836
			0								0.836	0.836
				0							0.836	0.836
					0						0.836	0.836
						0					0.836	0.836
							0				0.836	0.836
								0			0.836	0.836
									0		0.836	0.836
Edge 4	0										0	0.109
		0									0.109	0.109
			0								0.109	0.109
				0							0.109	0.109
					0						0.109	0.109
						0					0.109	0.109
							0				0.109	0.109
								0			0.109	0.109
									0		0.109	0.109

Sum of the SAR with Measured Values (WiFi Secondary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)	
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 5.2 GHz		
Rear	1.160											0.125	1.285
		1.160										0.125	1.285
			1.170									0.125	1.295
				1.170								0.125	1.295
					1.190							0.125	1.315
						1.190						0.125	1.315
							1.170					0.125	1.295
								1.170				0.125	1.295
Edge 1	0.985											0	0.985
		0.891										0	0.891
			0.591									0	0.591
				0.872								0	0.872
					0.752							0	0.752
						0.933						0	0.933
							0.760					0	0.760
								0.737				0	0.737
Edge 2									0.618			0	0.618
										0.976		0	0.976
	0.482											0.066	0.548
		0.730										0.066	0.796
			0.498									0.066	0.564
				0.686								0.066	0.752
					0.573							0.066	0.639
						0.768						0.066	0.834
Edge 3												0.066	0.625
							0.559					0.066	0.625
								0.476				0.066	0.542
									0.343			0.066	0.409
										0.792		0.066	0.858
	0											0.969	0.969
		0										0.969	0.969
			0									0.969	0.969
Edge 4				0								0.969	0.969
					0							0.969	0.969
						0						0.969	0.969
							0					0.969	0.969
								0				0.969	0.969
									0			0.969	0.969
										0		0.969	0.969
											0	0.969	0.969

Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.3 for all circumstances that require SPLSR calculation.

15.4. Sum of the SAR for GSM, W-CDMA, CDMA, LTE, WiFi 5.3 GHz

Sum of the SAR with Measured Values (WiFi Primary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)		
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 5.3 GHz			
Rear	1.160											0.126	1.286	
		1.160										0.126	1.286	
			1.170									0.126	1.296	
				1.170								0.126	1.296	
					1.190							0.126	1.316	
						1.190						0.126	1.316	
							1.170					0.126	1.296	
								1.170				0.126	1.296	
									1.180			0.126	1.306	
Edge 1	0.985											0	0.985	
		0.891										0	0.891	
			0.591									0	0.591	
				0.872								0	0.872	
					0.752							0	0.752	
						0.933						0	0.933	
							0.760					0	0.760	
								0.737				0	0.737	
									0.618			0	0.618	
Edge 2	0.482											0.976	0	0.976
		0.730										0	0	0.730
			0.498									0	0	0.498
				0.686								0	0	0.686
					0.573							0	0	0.573
						0.768						0	0	0.768
							0.559					0	0	0.559
								0.476				0	0	0.476
									0.343			0	0	0.343
Edge 3	0											0.792	0	0.792
		0										0.985	0	0.985
			0									0.985	0	0.985
				0								0.985	0	0.985
					0							0.985	0	0.985
						0						0.985	0	0.985
							0					0.985	0	0.985
								0				0.985	0	0.985
									0			0.985	0	0.985
Edge 4	0											0.155	0	0.155
		0										0.155	0	0.155
			0									0.155	0	0.155
				0								0.155	0	0.155
					0							0.155	0	0.155
						0						0.155	0	0.155
							0					0.155	0	0.155
								0				0.155	0	0.155
									0			0.155	0	0.155

Sum of the SAR with Measured Values (WiFi Secondary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 5.3 GHz	
Rear	1.160										0.168	1.328
		1.160									0.168	1.328
			1.170								0.168	1.338
				1.170							0.168	1.338
					1.190						0.168	1.358
						1.190					0.168	1.358
							1.170				0.168	1.338
								1.170			0.168	1.338
Edge 1	0.985										0	0.985
		0.891									0	0.891
			0.591								0	0.591
				0.872							0	0.872
					0.752						0	0.752
						0.933					0	0.933
							0.760				0	0.760
								0.737			0	0.737
Edge 2									0.618		0	0.618
										0.976	0	0.976
	0.482										0.086	0.568
		0.730									0.086	0.816
			0.498								0.086	0.584
				0.686							0.086	0.772
					0.573						0.086	0.659
						0.768					0.086	0.854
Edge 3											0.086	0.645
							0.559				0.086	0.562
								0.476			0.086	0.522
									0.343		0.086	0.429
										0.792	0.086	0.878
	0										1.140	1.140
		0									1.140	1.140
			0								1.140	1.140
Edge 4				0							1.140	1.140
					0						1.140	1.140
						0					1.140	1.140
							0				1.140	1.140
								0			1.140	1.140
									0		1.140	1.140
										0	1.140	1.140
											0	0

Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.3 for all circumstances that require SPLSR calculation.

15.5. Sum of the SAR for GSM, W-CDMA, CDMA, LTE, WiFi 5.5 GHz

Sum of the SAR with Measured Values (WiFi Primary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)	
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 5.5 GHz		
Rear	1.160											0.108	1.268
		1.160										0.108	1.268
			1.170									0.108	1.278
				1.170								0.108	1.278
					1.190							0.108	1.298
						1.190						0.108	1.298
							1.170					0.108	1.278
								1.170				0.108	1.278
									1.180			0.108	1.288
Edge 1										1.170	0.108	1.278	
	0.985										0	0.985	
		0.891									0	0.891	
			0.591								0	0.591	
				0.872							0	0.872	
					0.752						0	0.752	
						0.933					0	0.933	
							0.760				0	0.760	
								0.737			0	0.737	
Edge 2										0.618	0	0.618	
										0.976	0	0.976	
	0.482										0	0.482	
		0.730									0	0.730	
			0.498								0	0.498	
				0.686							0	0.686	
					0.573						0	0.573	
						0.768					0	0.768	
							0.559				0	0.559	
Edge 3										0.476	0	0.476	
										0.343	0	0.343	
										0.792	0	0.792	
	0										0.933	0.933	
		0									0.933	0.933	
			0								0.933	0.933	
				0							0.933	0.933	
					0						0.933	0.933	
						0					0.933	0.933	
Edge 4											0	0.933	0.933
	0										0.141	0.141	
		0									0.141	0.141	
			0								0.141	0.141	
				0							0.141	0.141	
					0						0.141	0.141	
						0					0.141	0.141	
							0				0.141	0.141	
								0			0.141	0.141	

Sum of the SAR with Measured Values (WiFi Secondary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)	
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 5.5 GHz		
Rear	1.160											0.183	1.343
		1.160										0.183	1.343
			1.170									0.183	1.353
				1.170								0.183	1.353
					1.190							0.183	1.373
						1.190						0.183	1.373
							1.170					0.183	1.353
								1.170				0.183	1.353
Edge 1	0.985											0	0.985
		0.891										0	0.891
			0.591									0	0.591
				0.872								0	0.872
					0.752							0	0.752
						0.933						0	0.933
							0.760					0	0.760
								0.737				0	0.737
Edge 2									0.618			0	0.618
										0.976		0	0.976
	0.482											0.077	0.559
		0.730										0.077	0.807
			0.498									0.077	0.575
				0.686								0.077	0.763
					0.573							0.077	0.650
						0.768						0.077	0.845
Edge 3												0.077	0.636
							0.559					0.077	0.553
								0.476				0.077	0.553
									0.343			0.077	0.420
										0.792		0.077	0.869
	0											1.180	1.180
		0										1.180	1.180
			0									1.180	1.180
Edge 4				0								1.180	1.180
					0							1.180	1.180
						0						1.180	1.180
							0					1.180	1.180
								0				1.180	1.180
									0			1.180	1.180
										0		1.180	1.180
											0	1.180	1.180
Edge 4	0											0	0
		0										0	0
			0									0	0
				0								0	0
					0							0	0
						0						0	0
							0					0	0
								0				0	0

Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.3 for all circumstances that require SPLSR calculation.

15.6. Sum of the SAR for GSM, W-CDMA, CDMA, LTE, WiFi 5.8 GHz

Sum of the SAR with Measured Values (WiFi Primary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)	
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 5.8 GHz		
Rear	1.160											0.079	1.239
		1.160										0.079	1.239
			1.170									0.079	1.249
				1.170								0.079	1.249
					1.190							0.079	1.269
						1.190						0.079	1.269
							1.170					0.079	1.249
								1.170				0.079	1.249
									1.180			0.079	1.259
Edge 1	0.985											0	0.985
		0.891										0	0.891
			0.591									0	0.591
				0.872								0	0.872
					0.752							0	0.752
						0.933						0	0.933
							0.760					0	0.760
								0.737				0	0.737
									0.618			0	0.618
Edge 2	0.482											0	0.482
		0.730										0	0.730
			0.498									0	0.498
				0.686								0	0.686
					0.573							0	0.573
						0.768						0	0.768
							0.559					0	0.559
								0.476				0	0.476
									0.343			0	0.343
Edge 3	0											0.887	0.887
		0										0.887	0.887
			0									0.887	0.887
				0								0.887	0.887
					0							0.887	0.887
						0						0.887	0.887
							0					0.887	0.887
								0				0.887	0.887
									0			0.887	0.887
Edge 4	0											0.135	0.135
		0										0.135	0.135
			0									0.135	0.135
				0								0.135	0.135
					0							0.135	0.135
						0						0.135	0.135
							0					0.135	0.135
								0				0.135	0.135
									0			0.135	0.135

Sum of the SAR with Measured Values (WiFi Secondary Antenna)

Test Position	Data											Σ 1-g SAR (mW/g)	
	GSM 850	GSM 1900	W-CDMA Band V	W-CDMA Band II	CDMA BC0	CDMA BC1	CDMA BC10	LTE Band 5	LTE Band 13	LTE Band 25	WiFi 5.8 GHz		
Rear	1.160											0.161	1.321
		1.160										0.161	1.321
			1.170									0.161	1.331
				1.170								0.161	1.331
					1.190							0.161	1.351
						1.190						0.161	1.351
							1.170					0.161	1.331
								1.170				0.161	1.331
Edge 1	0.985											0	0.985
		0.891										0	0.891
			0.591									0	0.591
				0.872								0	0.872
					0.752							0	0.752
						0.933						0	0.933
							0.760					0	0.760
								0.737				0	0.737
Edge 2									0.618			0	0.618
										0.976		0	0.976
	0.482											0.052	0.534
		0.730										0.052	0.782
			0.498									0.052	0.550
				0.686								0.052	0.738
					0.573							0.052	0.625
						0.768						0.052	0.820
Edge 3												0.052	0.611
							0.559					0.052	0.528
								0.476				0.052	0.395
									0.343			0.052	0.844
										0.792		0.052	1.170
												0.052	1.170
												0.052	1.170
												0.052	1.170
Edge 4												0.052	1.170
	0											0	0
		0										0	0
			0									0	0
				0								0	0
					0							0	0
						0						0	0
							0					0	0
Edge 4												0	0
												0	0
												0	0
												0	0
												0	0
												0	0
												0	0
												0	0

Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.3 for all circumstances that require SPLSR calculation.

15.7. Sum of the SAR for WiFi 5 GHz and Bluetooth

Sum of the SAR with Measured Values (WiFi Primary Antenna)

Test Position	Data						Σ 1-g SAR (mW/g)
	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth (Primary)	Bluetooth (Secondary)	
Rear	0.077				0.029		0.106
		0.126			0.029		0.155
			0.108		0.029		0.137
				0.079	0.029		0.108
	0.077					0.003	0.080
		0.126				0.003	0.129
			0.108			0.003	0.111
Edge 1				0.079		0.003	0.082
	0				0		0
		0			0		0
			0		0		0
				0	0		0
	0					0	0
		0				0	0
Edge 2			0			0	0
				0		0	0
					0		0
	0					0.025	0.025
		0				0.025	0.025
			0			0.025	0.025
				0		0.025	0.025
Edge 3	0.836				0.395		1.231
		0.985			0.395		1.380
			0.933		0.395		1.328
				0.887	0.395		1.282
	0.836					0.198	1.034
		0.985				0.198	1.183
			0.933			0.198	1.131
Edge 4				0.887		0.198	1.085
	0.109				0.079		0.188
		0.155			0.079		0.234
			0.141		0.079		0.220
				0.135	0.079		0.214
	0.109					0	0.109
		0.155				0	0.155
		0.141			0	0.141	
			0.135		0	0.135	

Sum of the SAR with Measured Values (WiFi Secondary Antenna)

Test Position	Data						Σ 1-g SAR (mW/g)
	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth (Primary)	Bluetooth (Secondary)	
Rear	0.125				0.029		0.154
		0.168			0.029		0.197
			0.183		0.029		0.212
				0.161	0.029		0.190
	0.125					0.003	0.128
		0.168				0.003	0.171
			0.183			0.003	0.186
				0.161		0.003	0.164
Edge 1	0				0		0
		0			0		0
			0		0		0
				0	0		0
	0					0	0
		0				0	0
			0			0	0
				0		0	0
Edge 2	0.066				0		0
		0.086			0		0
			0.077		0		0
				0.052	0		0
	0.066					0.025	0.091
		0.086				0.025	0.111
			0.077			0.025	0.102
				0.052		0.025	0.077
Edge 3	0.969				0.395		1.364
		1.140			0.395		1.535
			1.180		0.395		1.575
				1.170	0.395		1.565
	0.969					0.198	1.167
		1.140				0.198	1.338
			1.180			0.198	1.378
				1.170		0.198	1.368
Edge 4	0				0.079		0.079
		0			0.079		0.079
			0		0.079		0.079
				0	0.079		0.079
	0					0	0
		0				0	0
			0			0	0
				0		0	0

Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.


SAR to Peak Location Separation Ratio (SPLSR)

Case #	Test Position	Worst-case combination		Σ 1-g SAR (mW/g)	Calculated distance (cm)	SPLSR (≤ 0.3)	Figure
		WiFi 5.5GHz (Secondary)	Bluetooth (Primary)				
1	Edge 3	1.180	0.395	1.575	8.56	0.184	1

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.3 for all circumstances that require SPLSR calculation.

Figure (1)

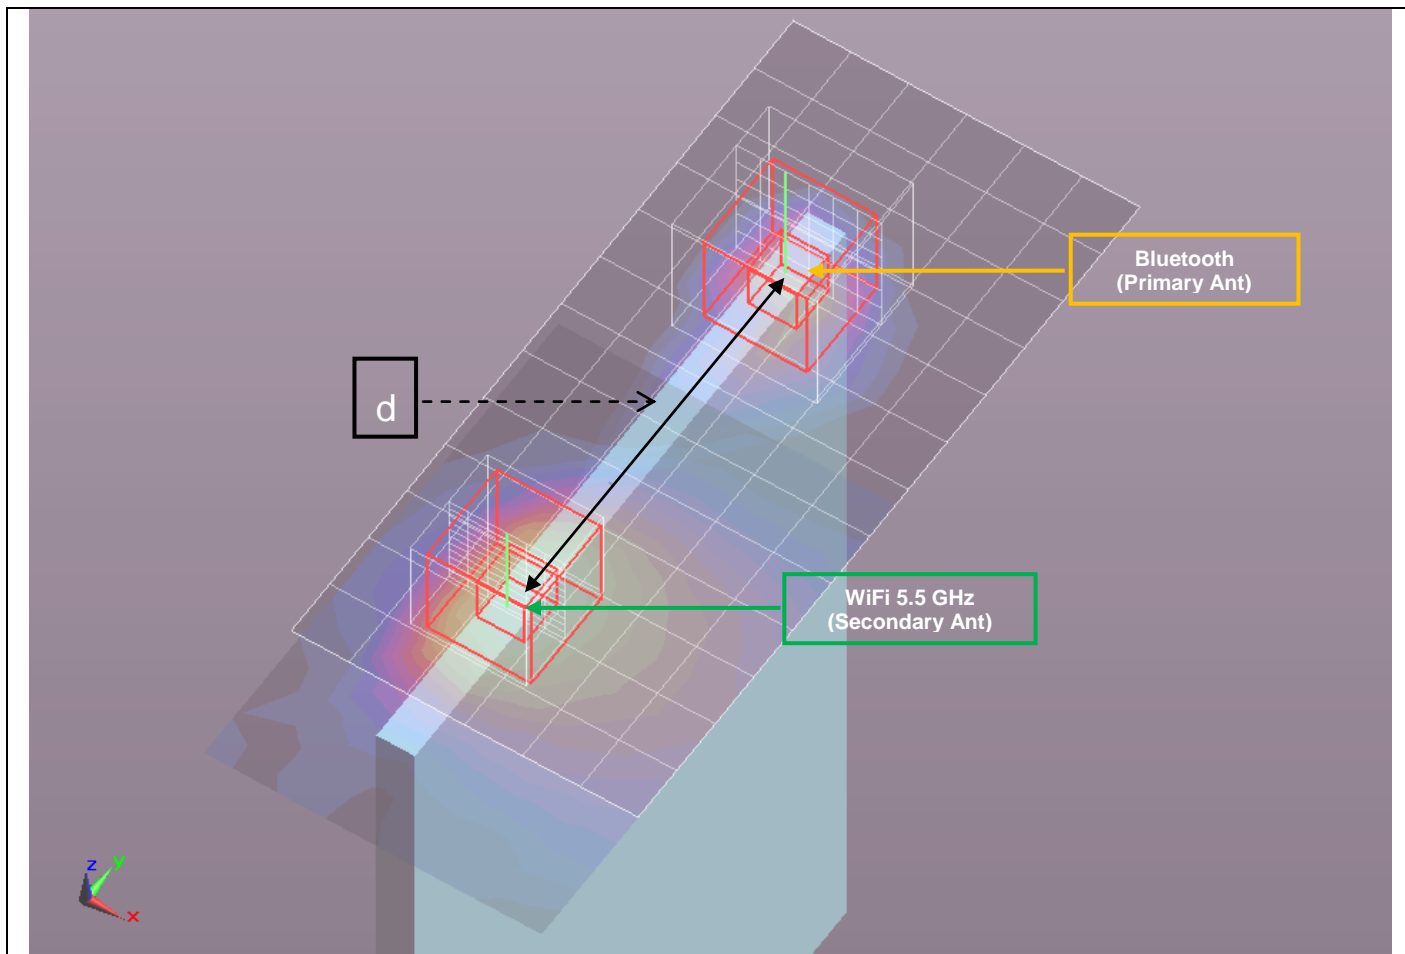

Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
Bluetooth (Primary Ant)	0.637	0.0016	0.0456	-0.183
WiFi 5.5 GHz (Secondary Ant)	2.27	0.001	-0.04	-0.183

d: Calculated distance (cm)
8.56

The Peak Location Separation Distance is computed by using the formula below:

$$\sqrt[3]{(X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2}$$

16. Appendixes

Refer to separated files for the following appendixes.

- 16.1. System Performance Check Plots
- 16.2. SAR Test Plots for GSM850
- 16.3. SAR Test Plots for GSM1900
- 16.4. SAR Test Plots for W-CDMA Band V
- 16.5. SAR Test Plots for W-CDMA Band II
- 16.6. SAR Test Plots for CDMA BC0
- 16.7. SAR Test Plots for CDMA BC1
- 16.8. SAR Test Plots for CDMA BC10
- 16.9. SAR Test Plots for LTE Band 5
- 16.10. SAR Test Plots for LTE Band 13
- 16.11. SAR Test Plots for LTE Band 25
- 16.12. SAR Test Plots for WiFi 2.4 GHz Band
- 16.13. SAR Test Plots for WiFi 5 GHz Bands
- 16.14. SAR Test Plots for Bluetooth
- 16.15. Calibration Certificate for E-Field Probe EX3DV4 - SN 3686
- 16.16. Calibration Certificate for E-Field Probe EX3DV4 - SN 3772
- 16.17. Calibration Certificate for E-Field Probe EX3DV4 - SN 3773
- 16.18. Calibration Certificate for D750V3 - SN 1024
- 16.19. Calibration Certificate for D835V2 - SN 4d002
- 16.20. Calibration Certificate for D835V2 - SN 4d117
- 16.21. Calibration Certificate for D1900V2 - SN 5d140
- 16.22. Calibration Certificate for D2450V2 - SN 748
- 16.23. Calibration Certificate for D5GHzV2 - SN 1075
- 16.24. Calibration Certificate for D5GHzV2 - SN 1003