

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 52.466$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/1xRTT_RC3_SO32_Ch 25/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.854 mW/g

Rear/1xRTT_RC3_SO32_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 29.661 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.6810

SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.422 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.350 mW/g

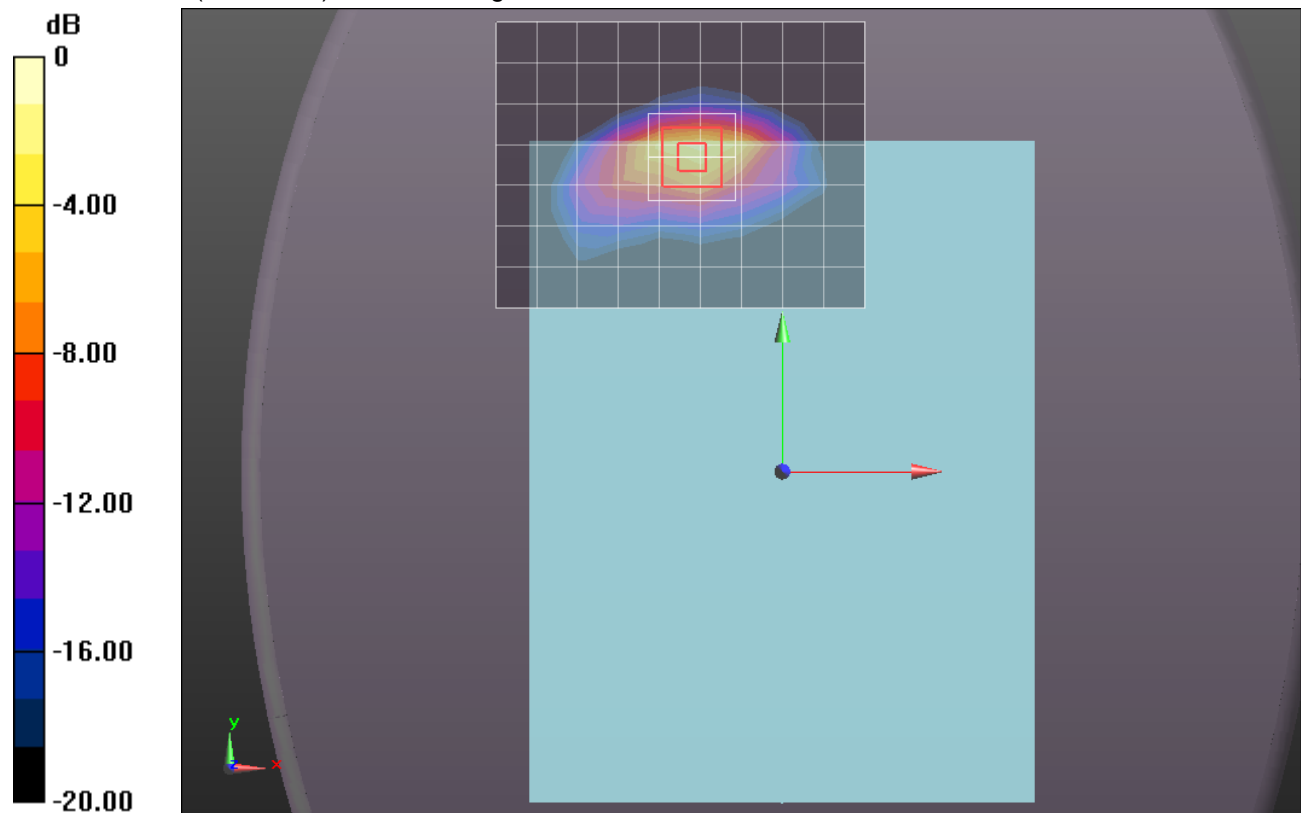

0 dB = 1.350mW/g = 2.61 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r = 52.369$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/1xRTT_RC3_SO32_Ch 600/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.211 mW/g


Rear/1xRTT_RC3_SO32_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.123 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.2440

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.560 mW/g

Maximum value of SAR (measured) = 1.782 mW/g

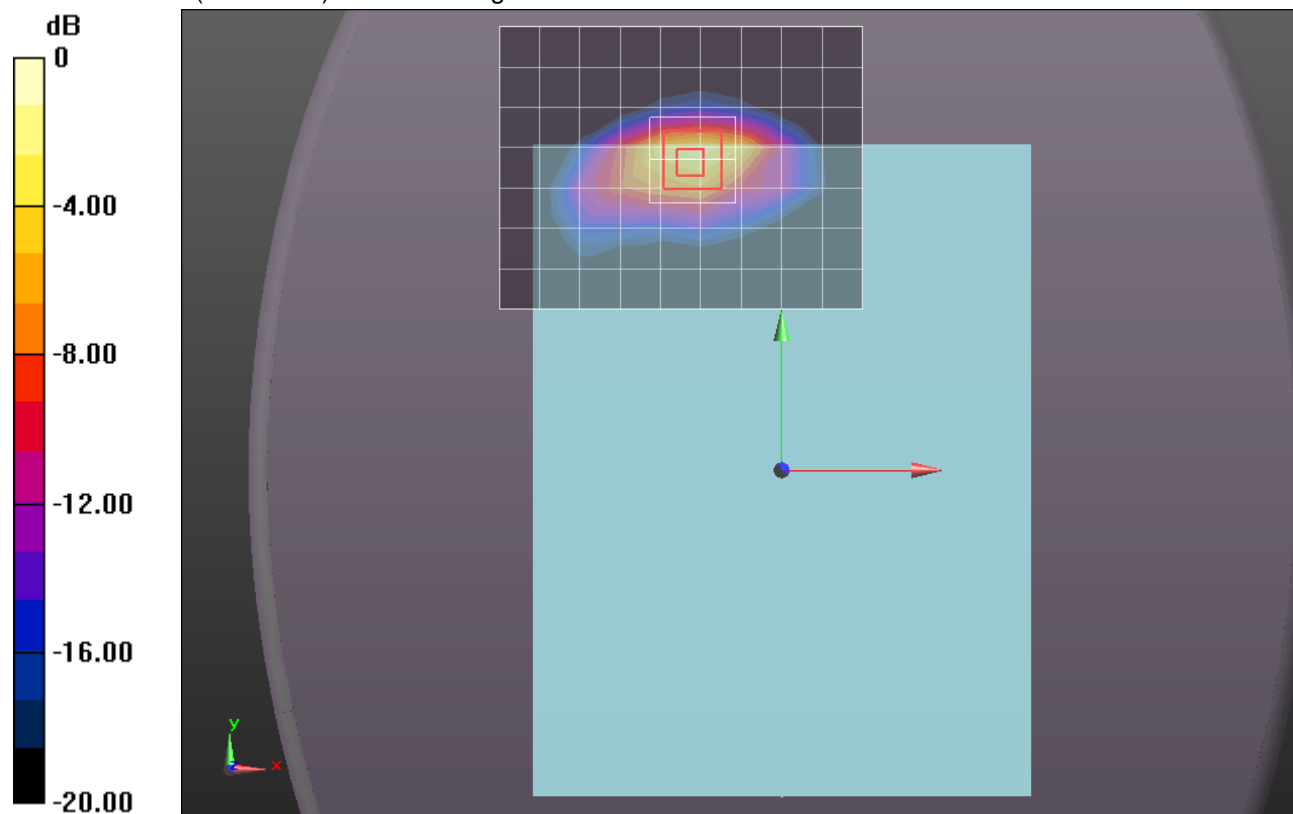


0 dB = 1.780mW/g = 5.01 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/1xRTT_RC3_SO32_Ch 600/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.704 mW/g

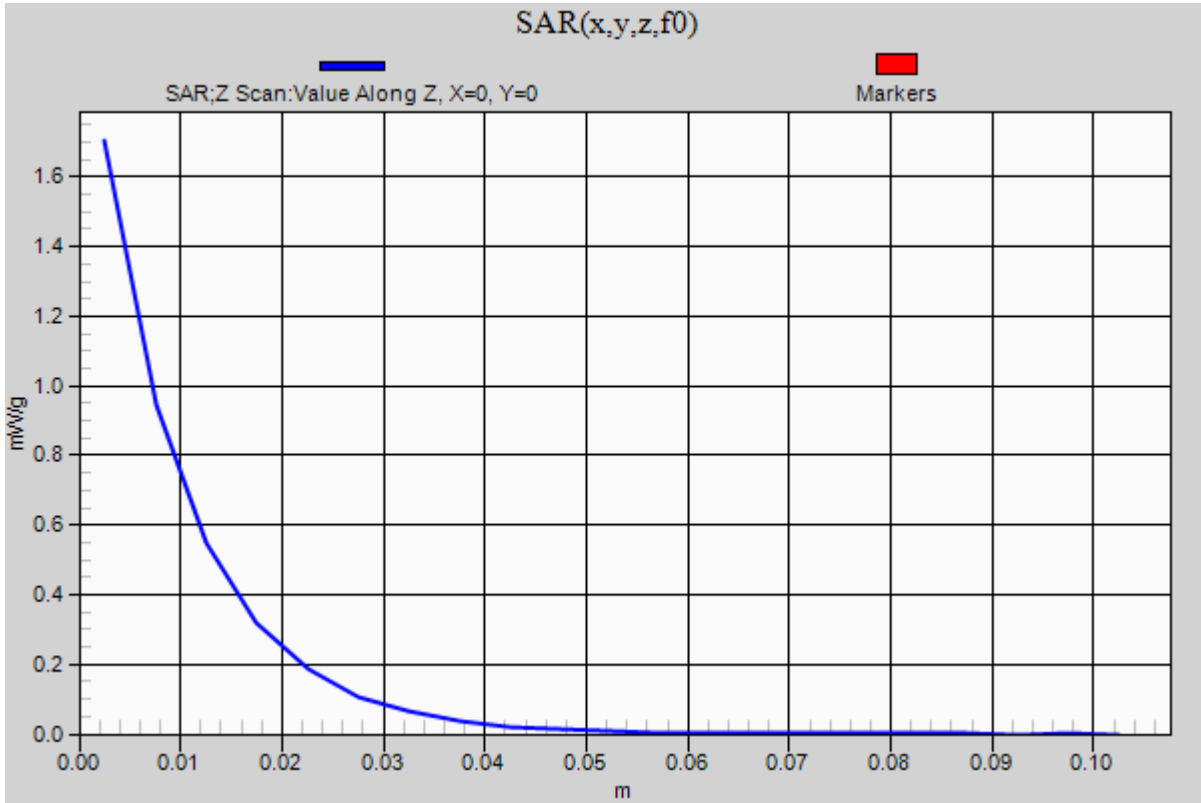

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.546$ mho/m; $\epsilon_r = 52.219$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/1xRTT_RC3_SO32_Ch 1175/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.102 mW/g

Rear/1xRTT_RC3_SO32_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.345 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.1750

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.548 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.709 mW/g

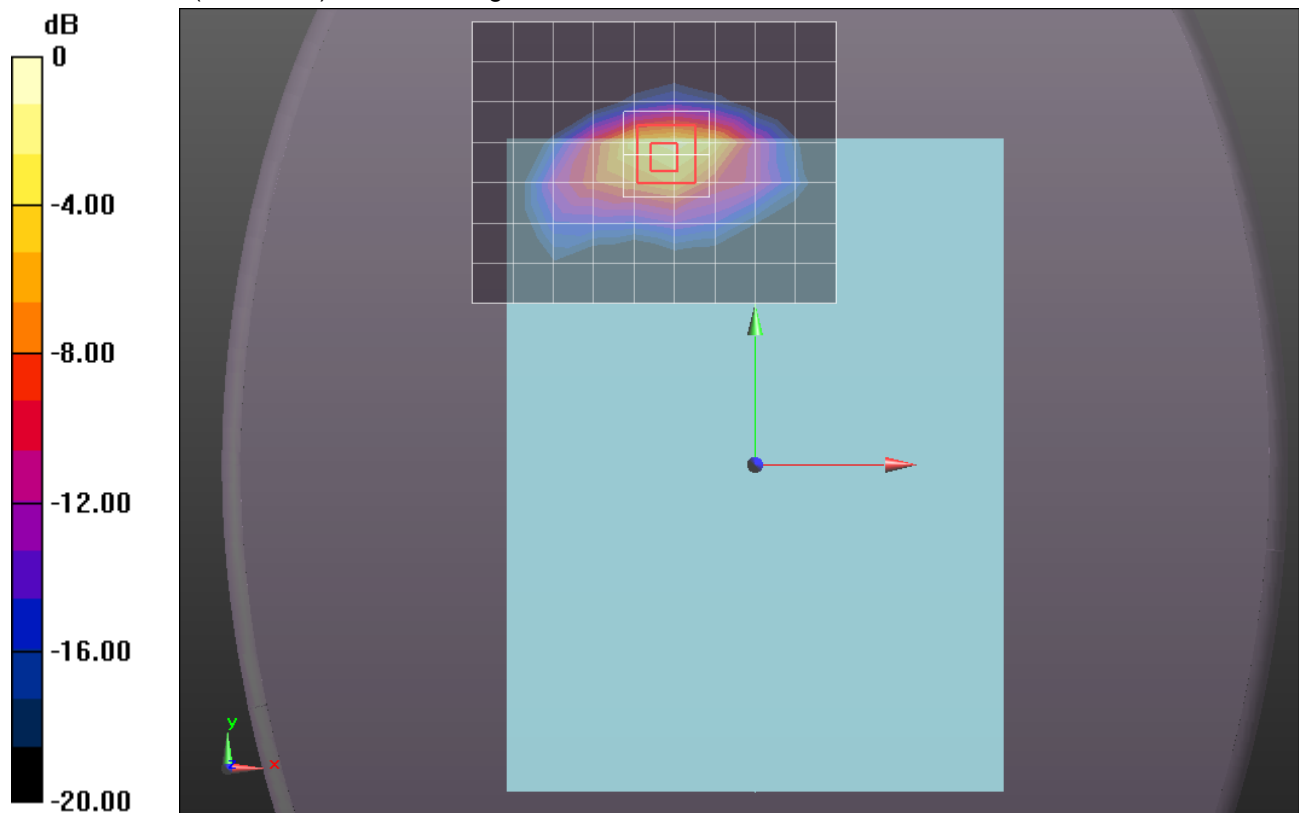

0 dB = 1.710mW/g = 4.66 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.501$ mho/m; $\epsilon_r = 52.666$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1/1xRTT_RC3_SO32_Ch 25/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.025 mW/g

Edge 1/1xRTT_RC3_SO32_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.579 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.3850

SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.353 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.098 mW/g

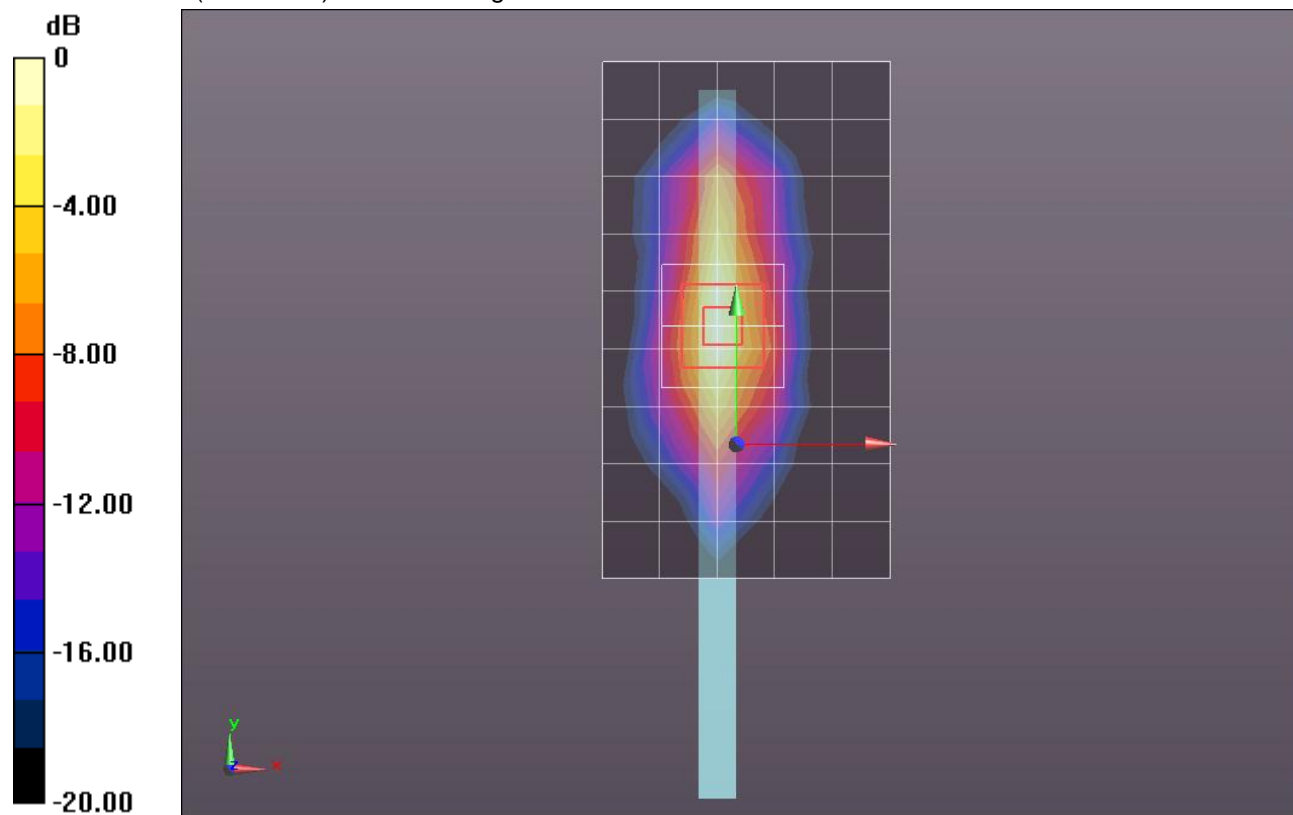

0 dB = 1.100mW/g = 0.83 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.538$ mho/m; $\epsilon_r = 52.546$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1/1xRTT_RC3_SO32_Ch 600/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.279 mW/g


Edge 1/1xRTT_RC3_SO32_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.349 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.7390

SAR(1 g) = 0.926 mW/g; SAR(10 g) = 0.442 mW/g

Maximum value of SAR (measured) = 1.380 mW/g

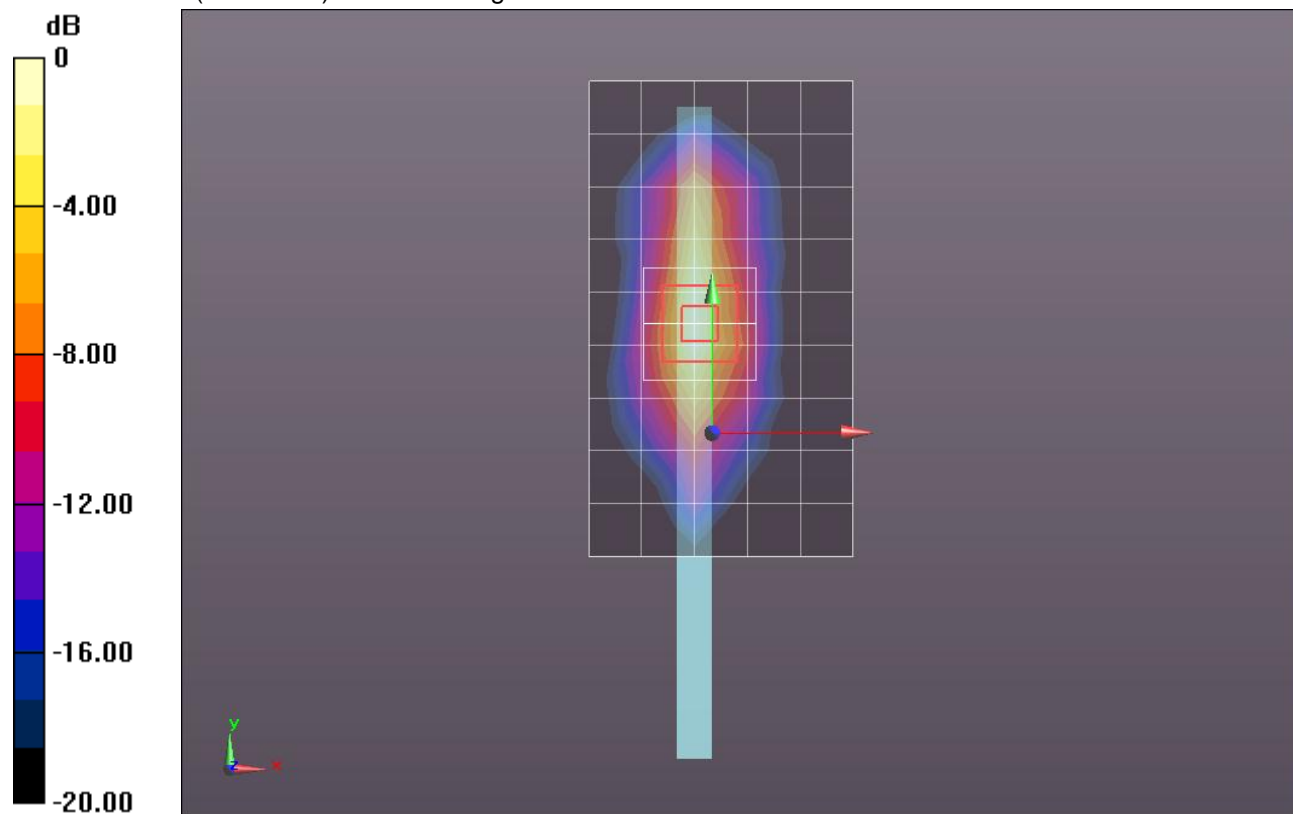

0 dB = 1.380mW/g = 2.80 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.571$ mho/m; $\epsilon_r = 52.426$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1/1xRTT_RC3_SO32_Ch 1175/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.199 mW/g

Edge 1/1xRTT_RC3_SO32_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.130 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.6510

SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.414 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.309 mW/g

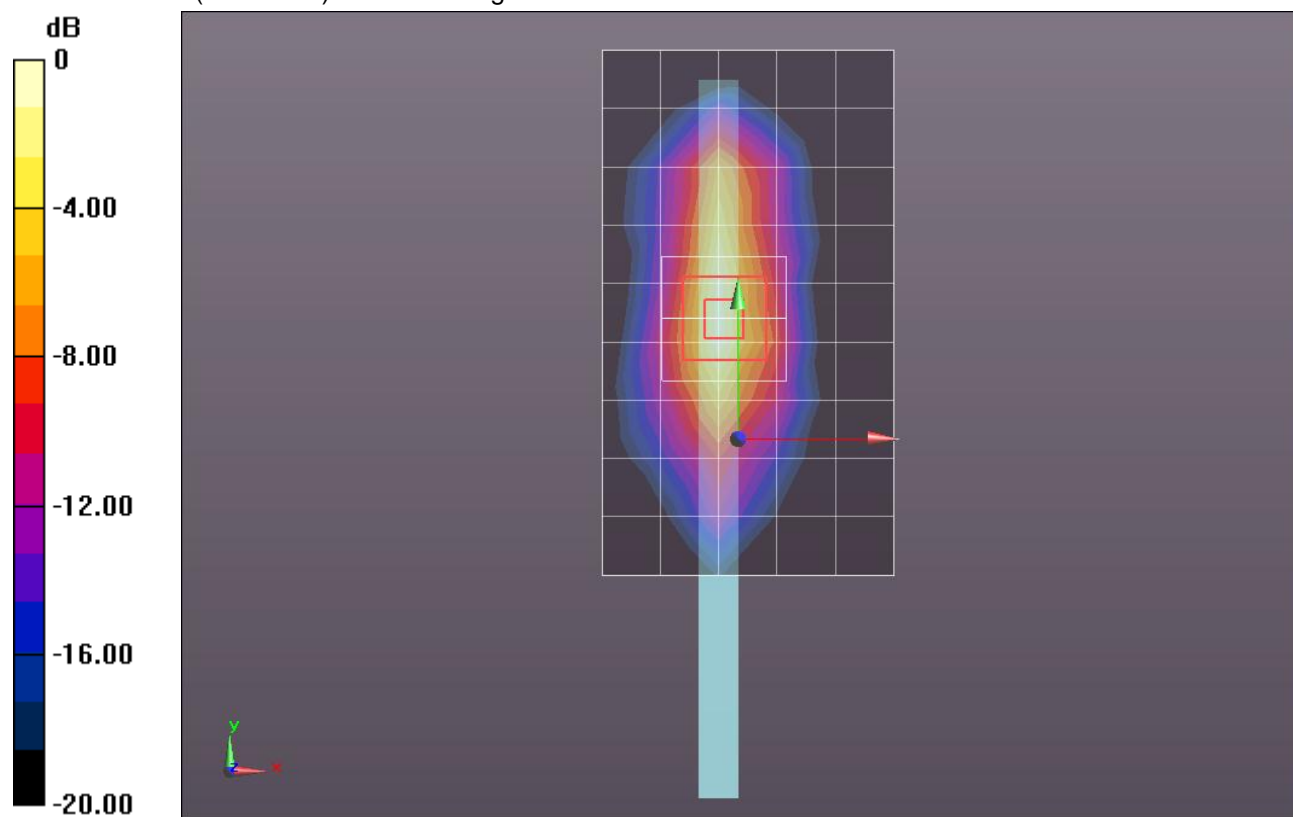

0 dB = 1.310mW/g = 2.35 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.197$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/1xRTT_RC3_S032_Ch 25/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.386 mW/g

41 deg Tilt @ Edge 1/1xRTT_RC3_S032_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.646 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.8810

SAR(1 g) = 0.968 mW/g; SAR(10 g) = 0.449 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.457 mW/g

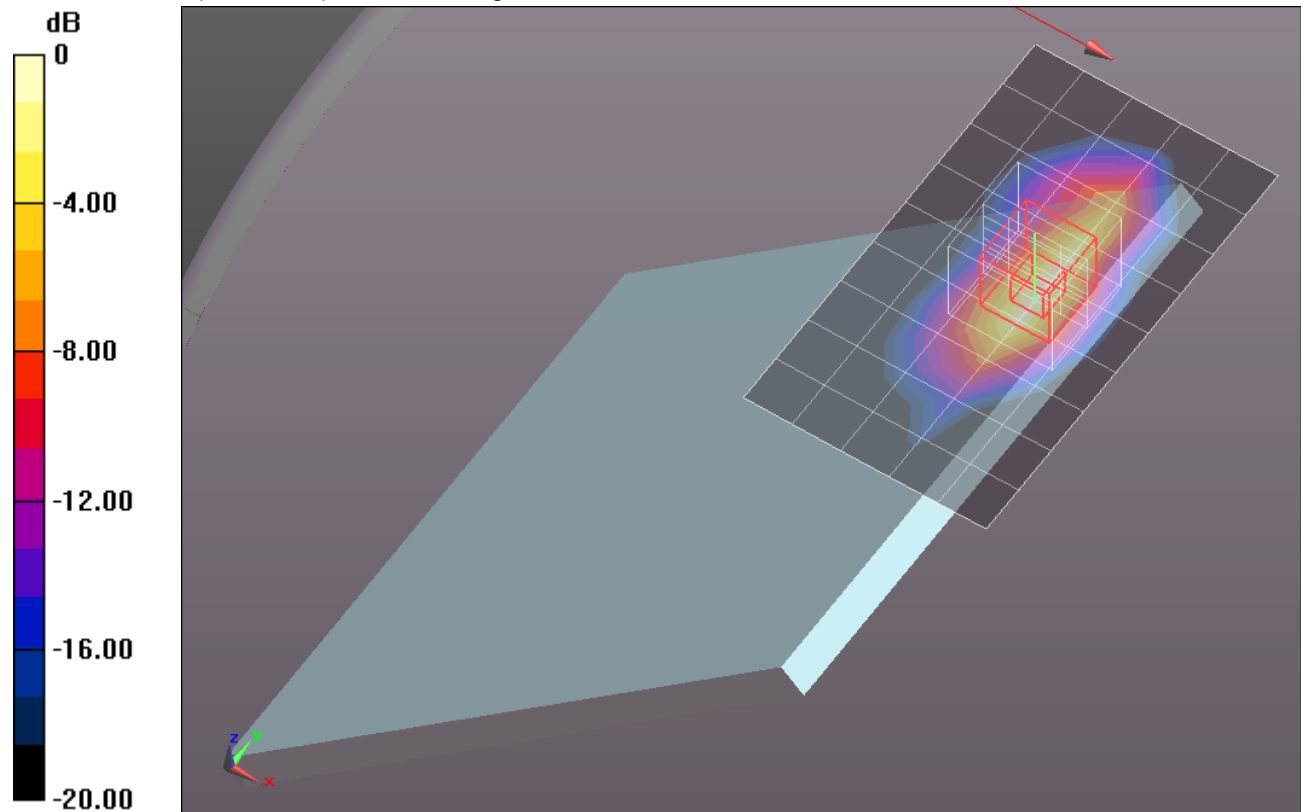

0 dB = 1.460mW/g = 3.29 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.494$ mho/m; $\epsilon_r = 52.15$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/1xRTT_RC3_S032_Ch 600/Area Scan (6x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.665 mW/g

41 deg Tilt @ Edge 1/1xRTT_RC3_S032_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 33.794 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.2980

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.543 mW/g

Maximum value of SAR (measured) = 1.803 mW/g

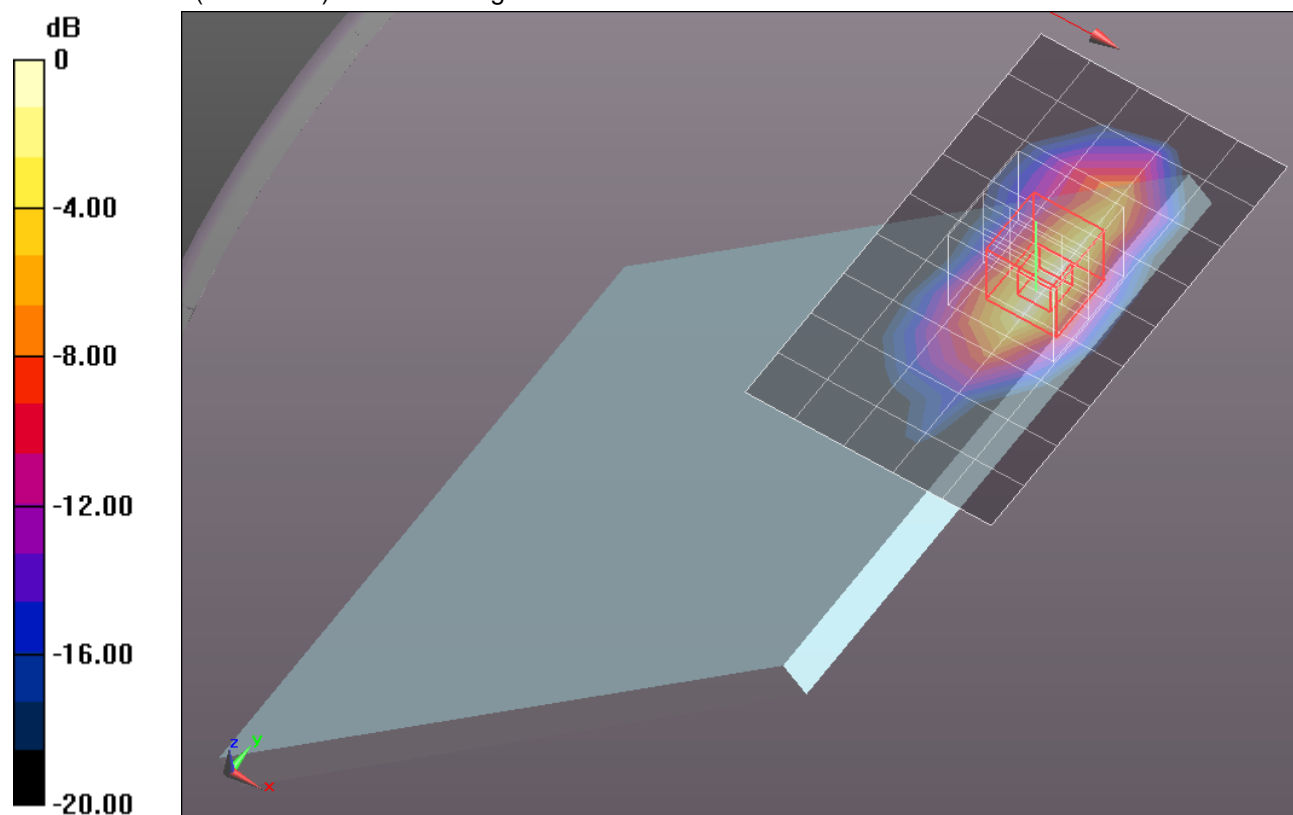

0 dB = 1.800mW/g = 5.11 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.074$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/1xRTT_RC3_S032_Ch 1175/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.583 mW/g

41 deg Tilt @ Edge 1/1xRTT_RC3_S032_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.286 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.1410

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.503 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.674 mW/g

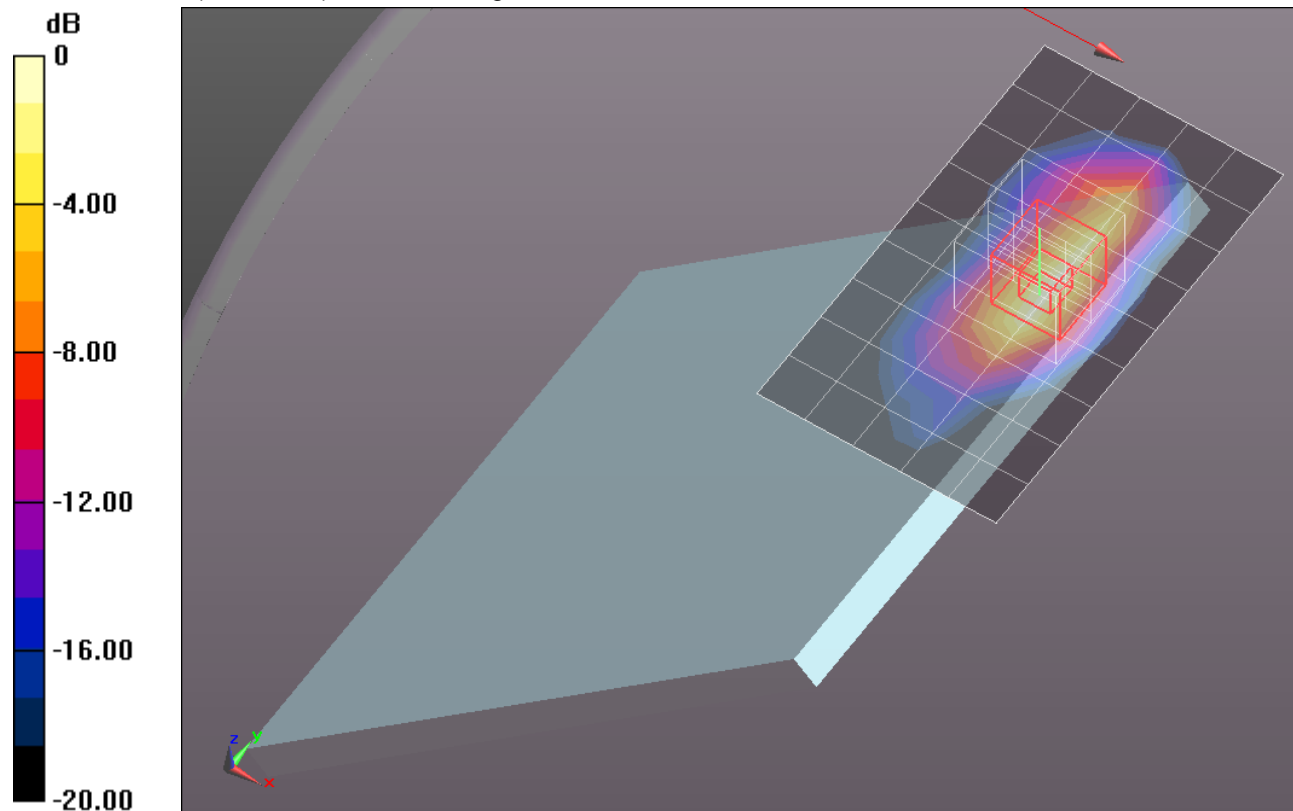

0 dB = 1.670mW/g = 4.45 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.197$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/1xRTT_RC3_SO32_Ch 25/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.747 mW/g

Rear with 12mm/1xRTT_RC3_SO32_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.949 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.9550

SAR(1 g) = 0.591 mW/g; SAR(10 g) = 0.334 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.787 mW/g

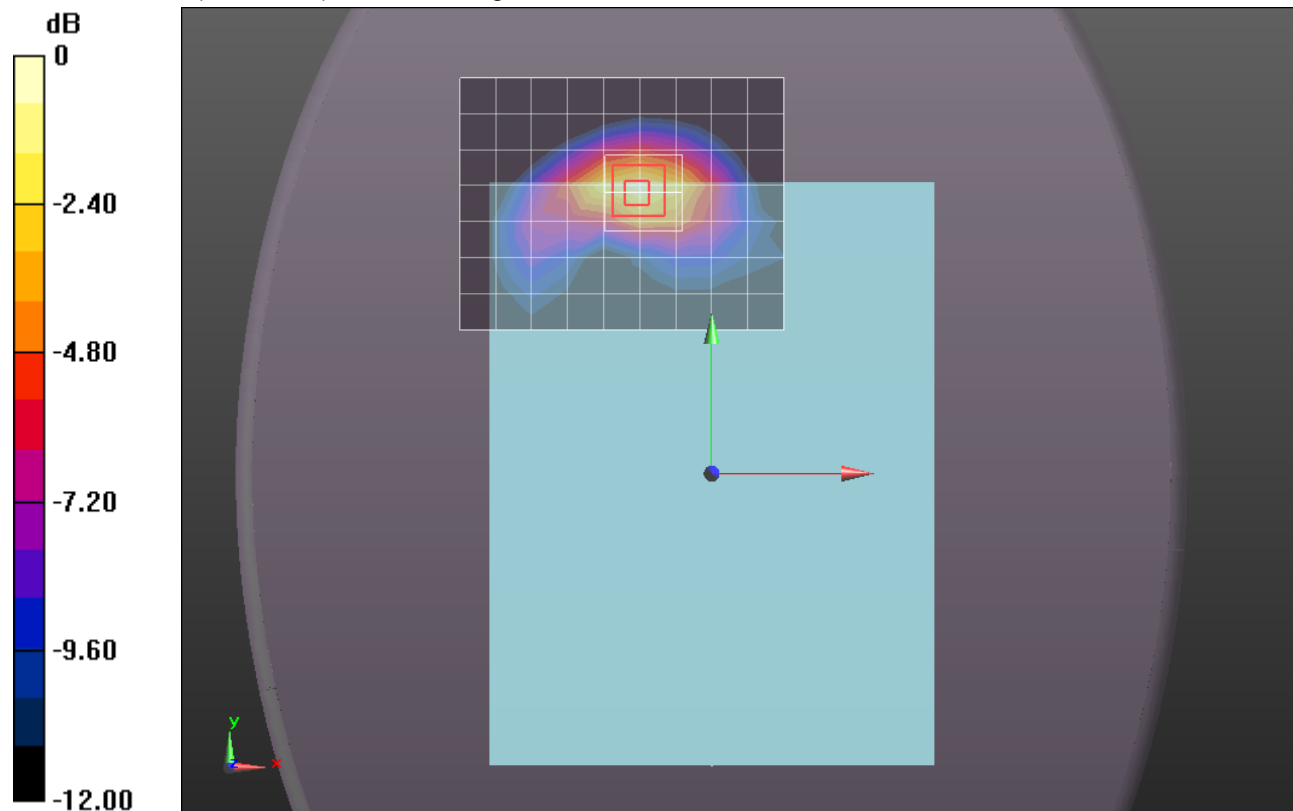

0 dB = 0.790mW/g = -2.05 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.494$ mho/m; $\epsilon_r = 52.15$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/1xRTT_RC3_SO32_Ch 600/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.010 mW/g


Rear with 12mm/1xRTT_RC3_SO32_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.337 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.3130

SAR(1 g) = 0.806 mW/g; SAR(10 g) = 0.453 mW/g

Maximum value of SAR (measured) = 1.080 mW/g

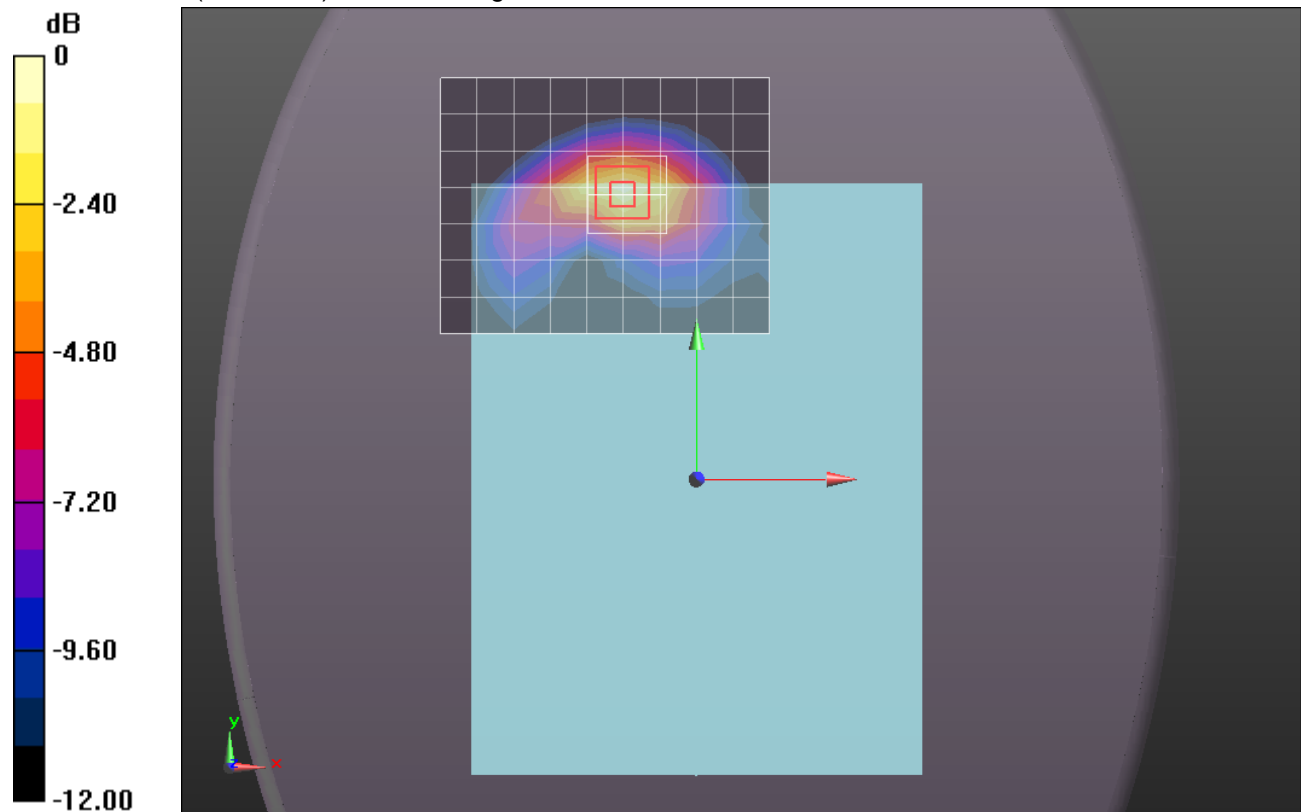

0 dB = 1.080mW/g = 0.67 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.074$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/1xRTT_RC3_SO32_Ch 1175/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.024 mW/g

Rear with 12mm/1xRTT_RC3_SO32_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.485 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.3490

SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.461 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.104 mW/g

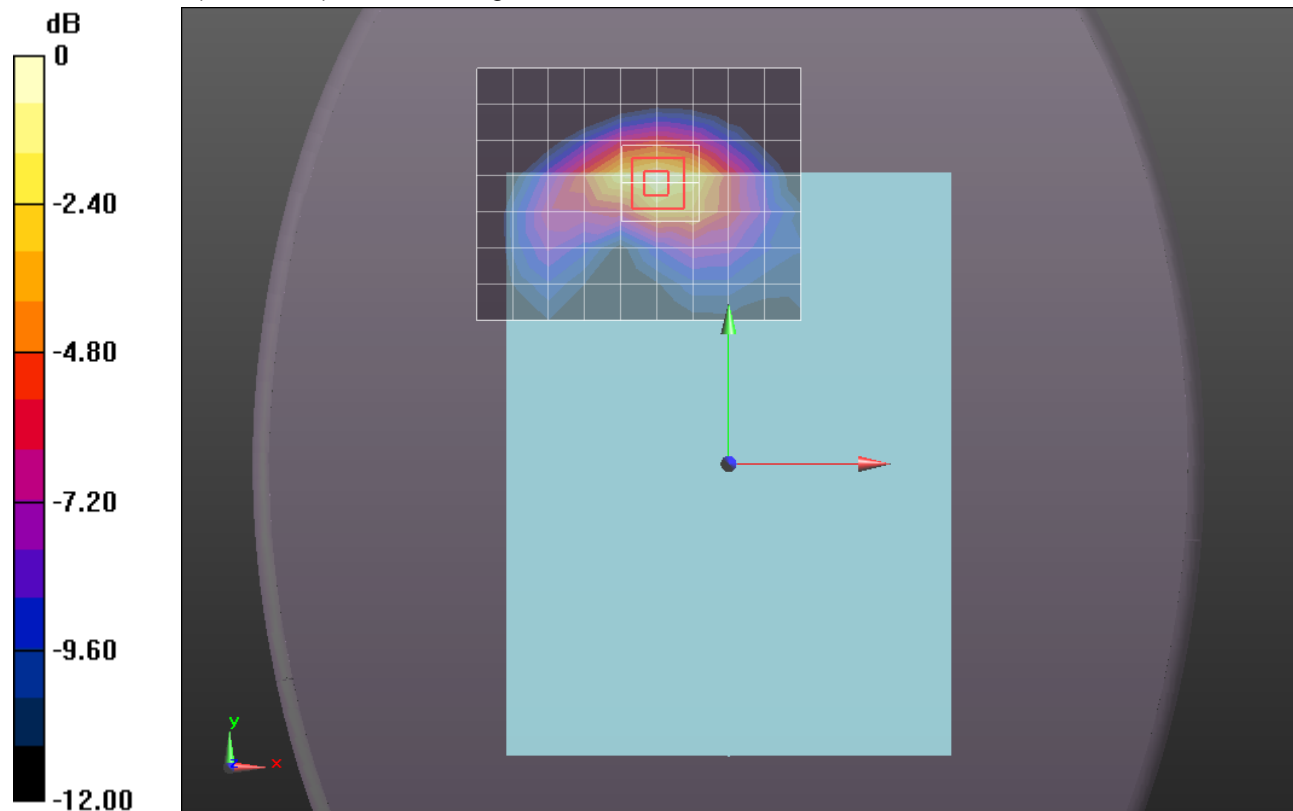

0 dB = 1.100mW/g = 0.83 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.197$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/1xRTT_RC3_SO32_Ch 25/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.825 mW/g

Edge 1 with 14mm/1xRTT_RC3_SO32_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.703 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.9920

SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.378 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.833 mW/g

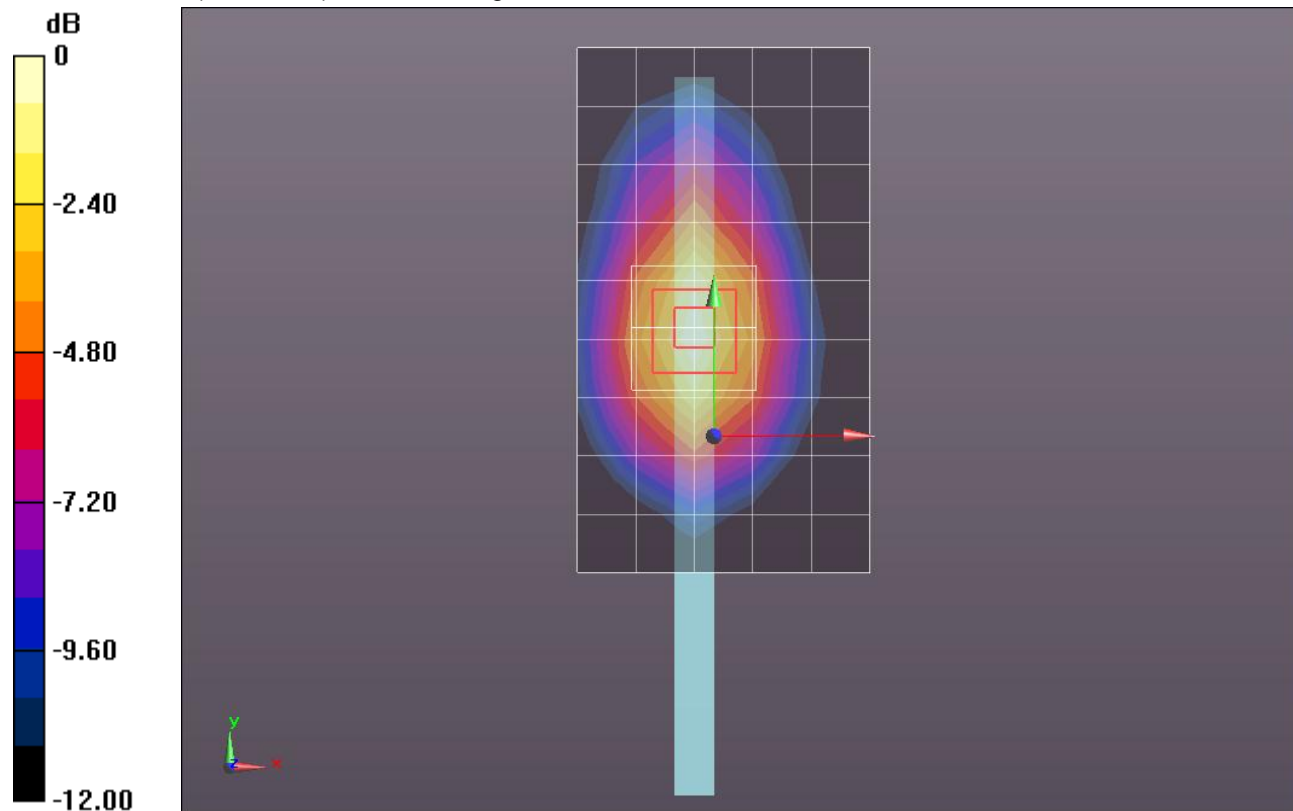

0 dB = 0.830mW/g = -1.62 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.494$ mho/m; $\epsilon_r = 52.15$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/1xRTT_RC3_SO32_Ch 600/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.157 mW/g


Edge 1 with 14mm/1xRTT_RC3_SO32_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.582 V/m; Power Drift = -0.0094 dB

Peak SAR (extrapolated) = 1.3920

SAR(1 g) = 0.883 mW/g; SAR(10 g) = 0.521 mW/g

Maximum value of SAR (measured) = 1.165 mW/g

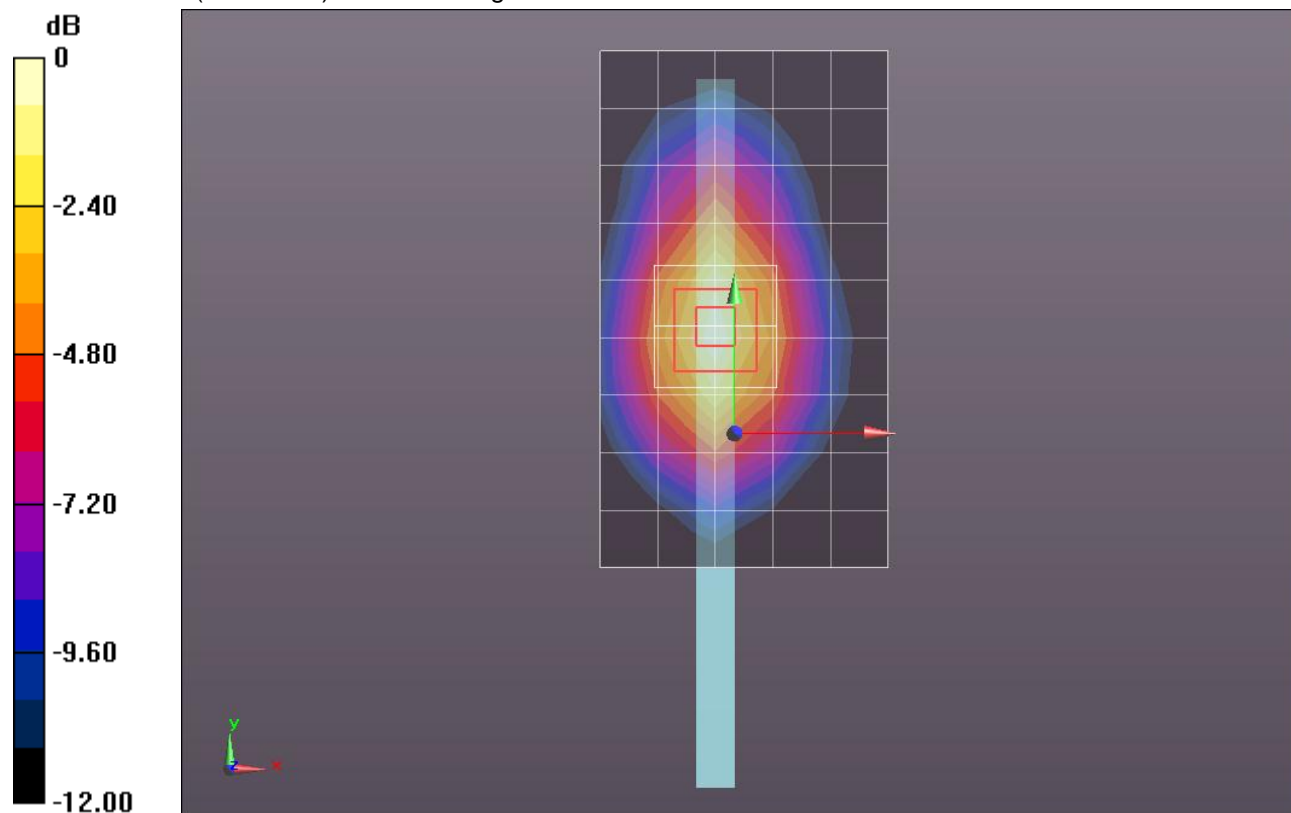

0 dB = 1.170mW/g = 1.36 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.074$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/1xRTT_RC3_SO32_Ch 1175/Area Scan (6x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.144 mW/g

Edge 1 with 14mm/1xRTT_RC3_SO32_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 27.138 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.4050

SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.514 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.162 mW/g

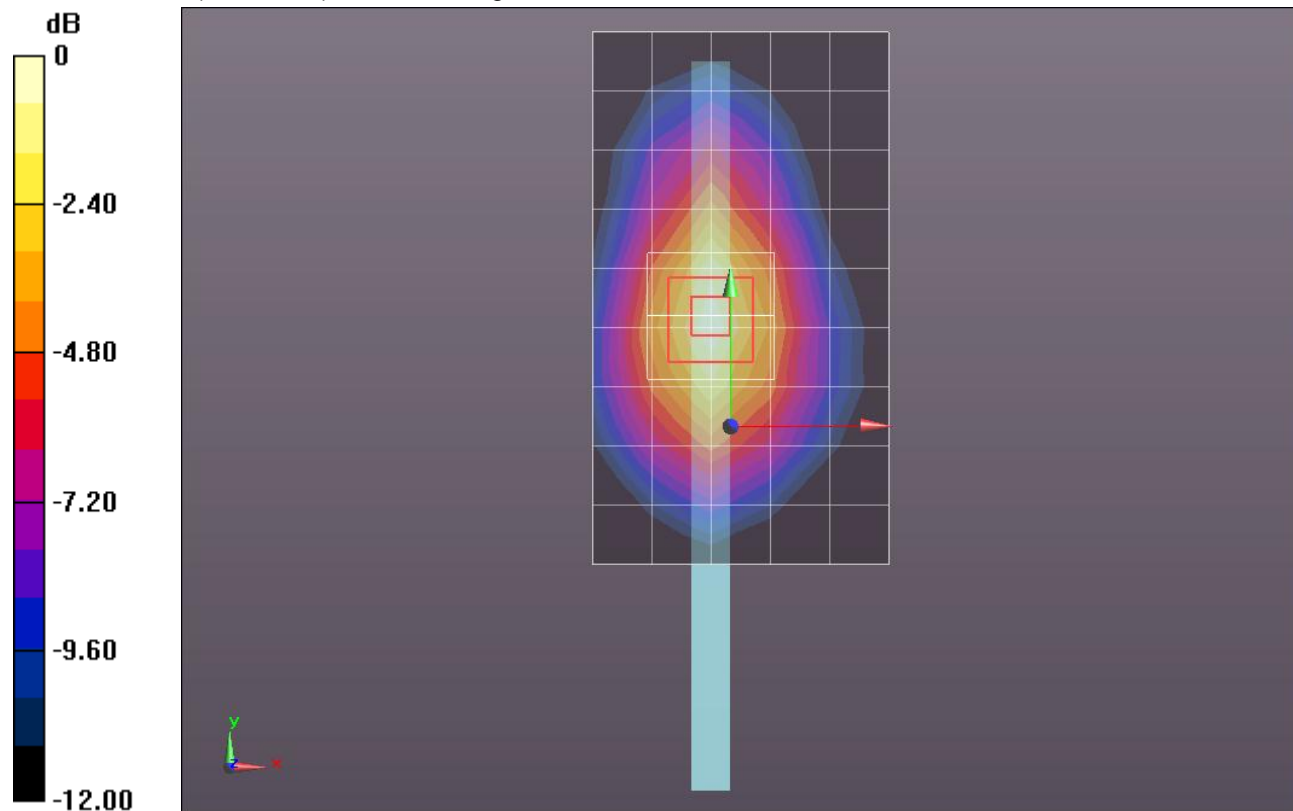

0 dB = 1.160mW/g = 1.29 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.494$ mho/m; $\epsilon_r = 52.15$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

27 deg Right Tilt @ Edge 1/1xRTT_RC3_SO32_Ch. 600/Area Scan (7x11x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.654 mW/g

27 deg Right Tilt @ Edge 1/1xRTT_RC3_SO32_Ch. 600/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.260 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.1050

SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.835 mW/g

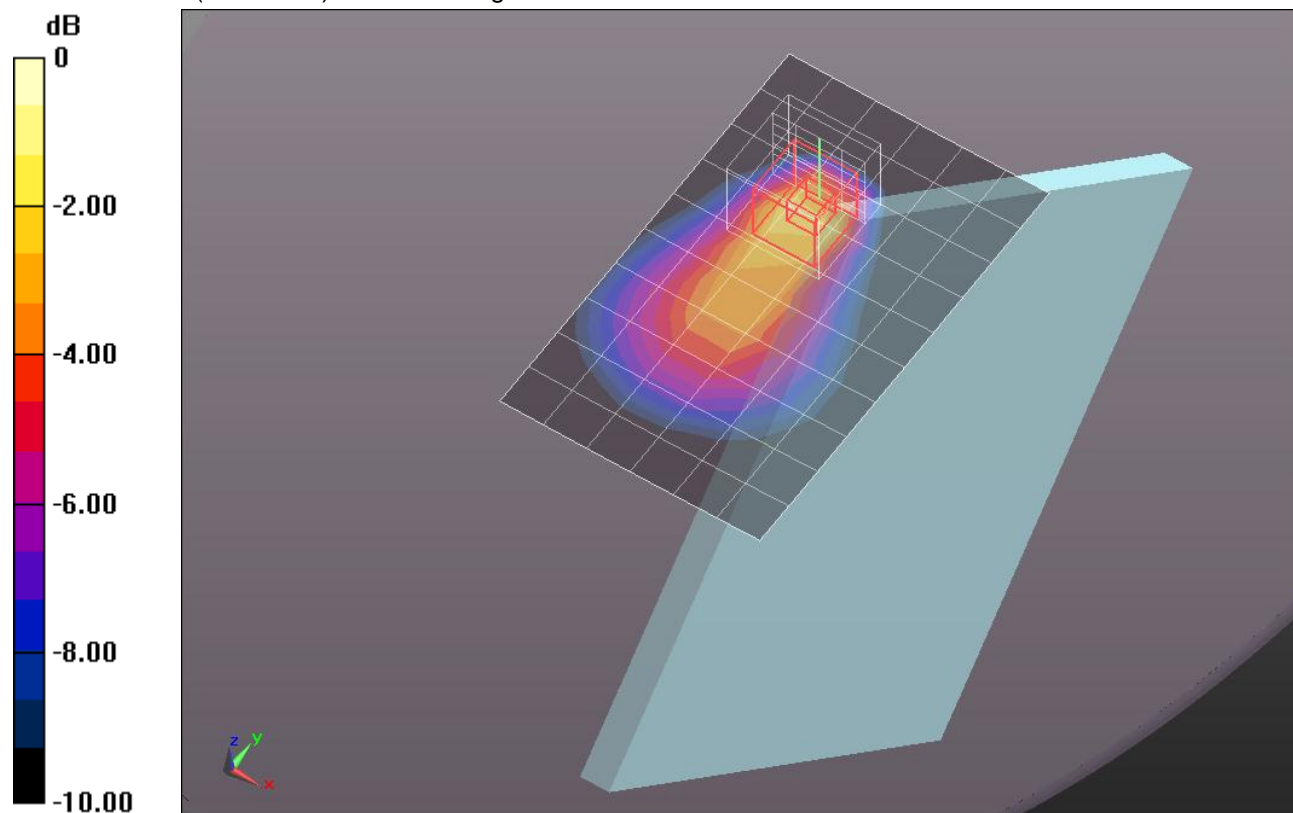

0 dB = 0.840mW/g = -1.51 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.494$ mho/m; $\epsilon_r = 52.15$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 2/1xRTT_RC3_SO32_Ch. 600/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.631 mW/g


Edge 2/1xRTT_RC3_SO32_Ch. 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.805 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.7990

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.629 mW/g

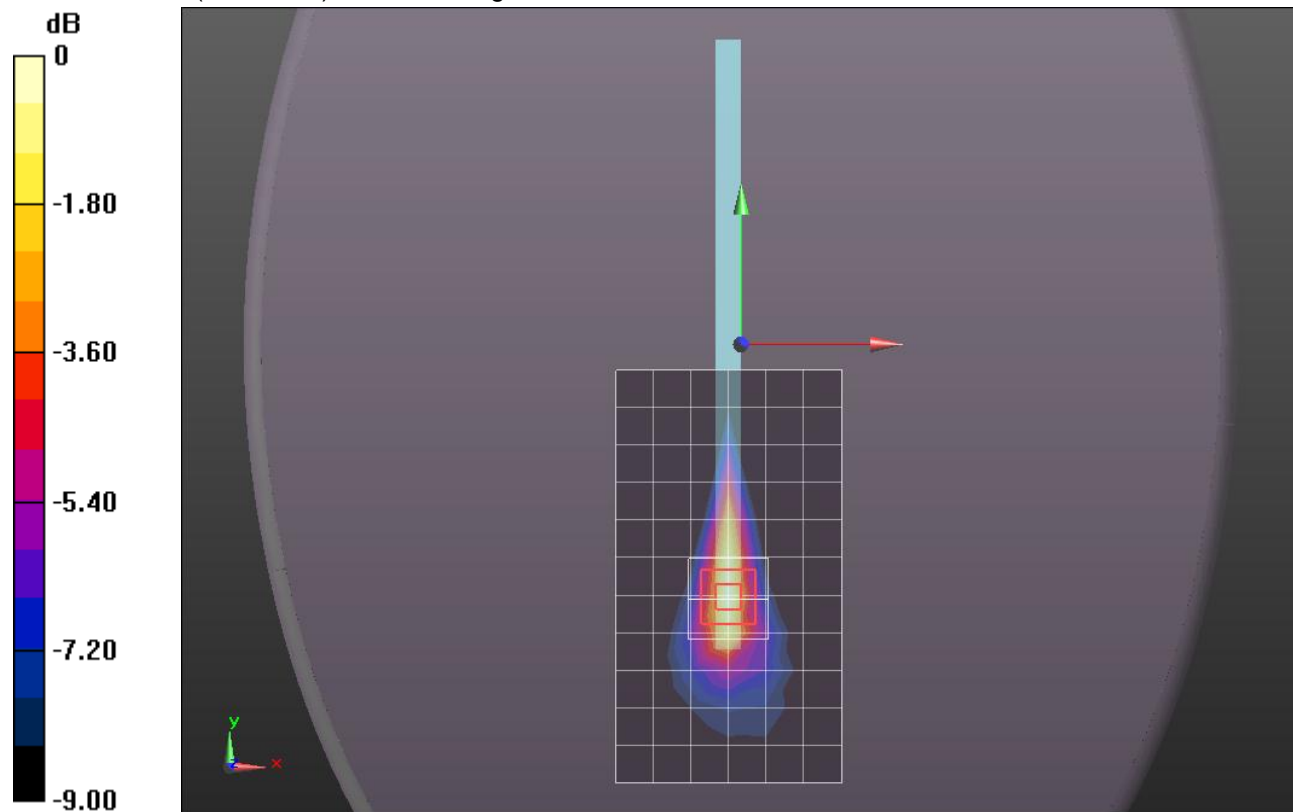

0 dB = 0.630mW/g = -4.01 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.495$ mho/m; $\epsilon_r = 52.551$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/1xEVDO_Rel. 0_Ch 25/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.890 mW/g

Rear/1xEVDO_Rel. 0_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.779 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.6630

SAR(1 g) = 0.877 mW/g; SAR(10 g) = 0.412 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.286 mW/g

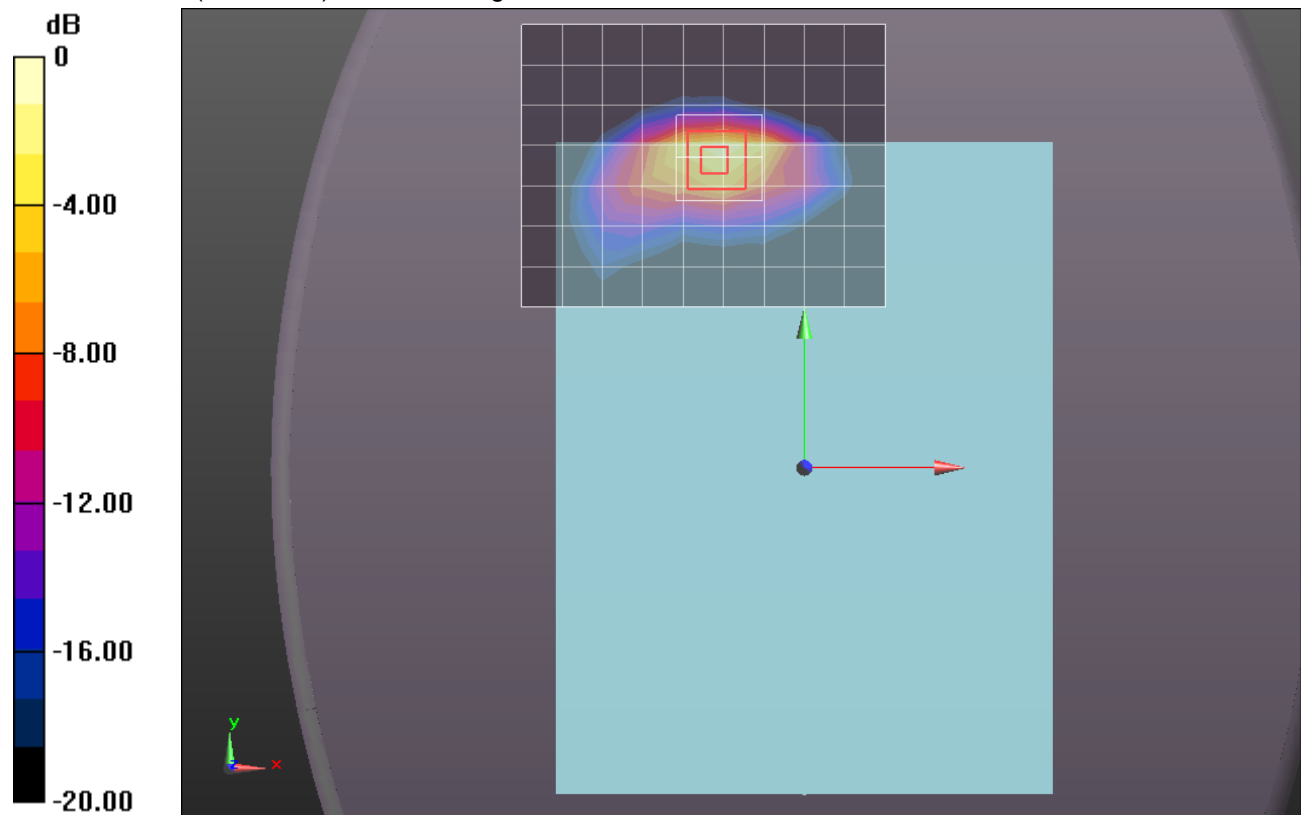

0 dB = 1.290mW/g = 2.21 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.531$ mho/m; $\epsilon_r = 52.512$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/1xEVDO_Rel. 0_Ch 600/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.136 mW/g


Rear/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.823 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.0370

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.525 mW/g

Maximum value of SAR (measured) = 1.575 mW/g

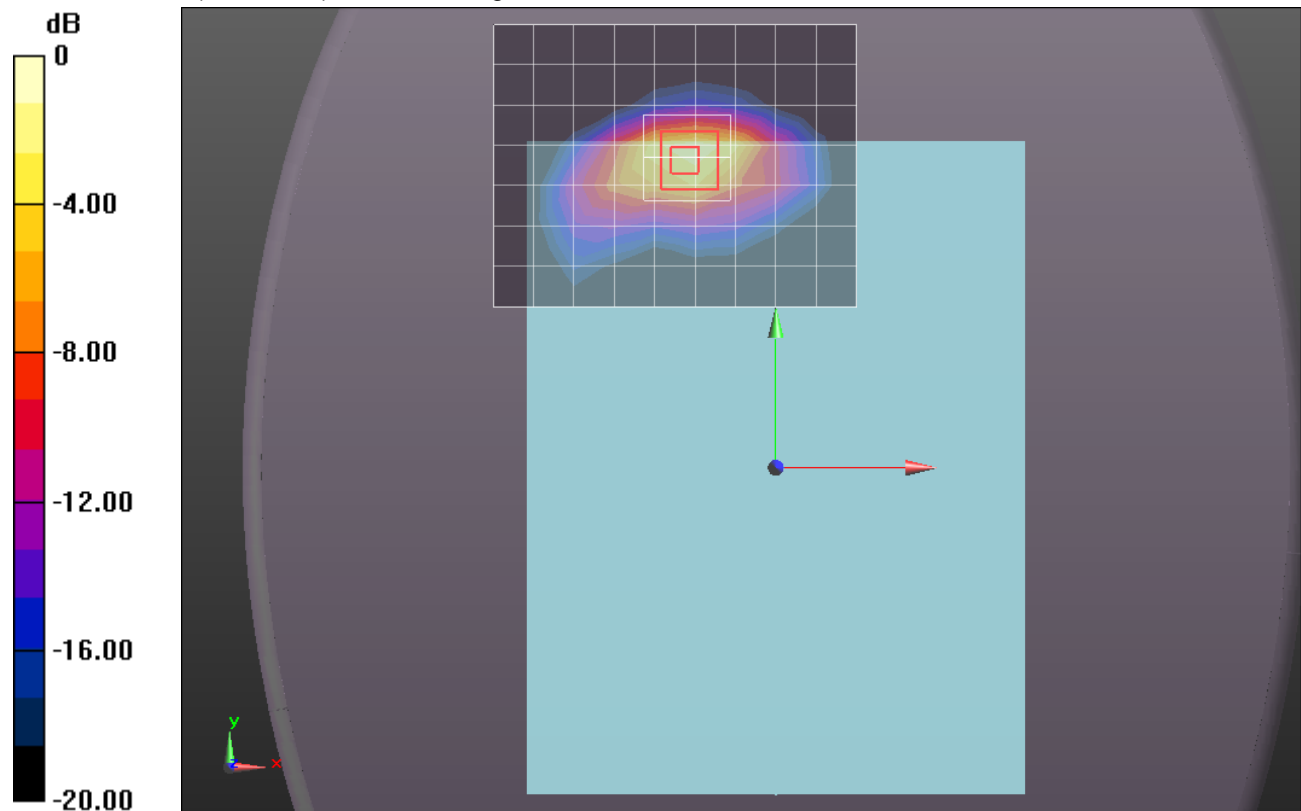


0 dB = 1.580mW/g = 3.97 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/1xEVDO_Rel. 0_Ch 600/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.510 mW/g

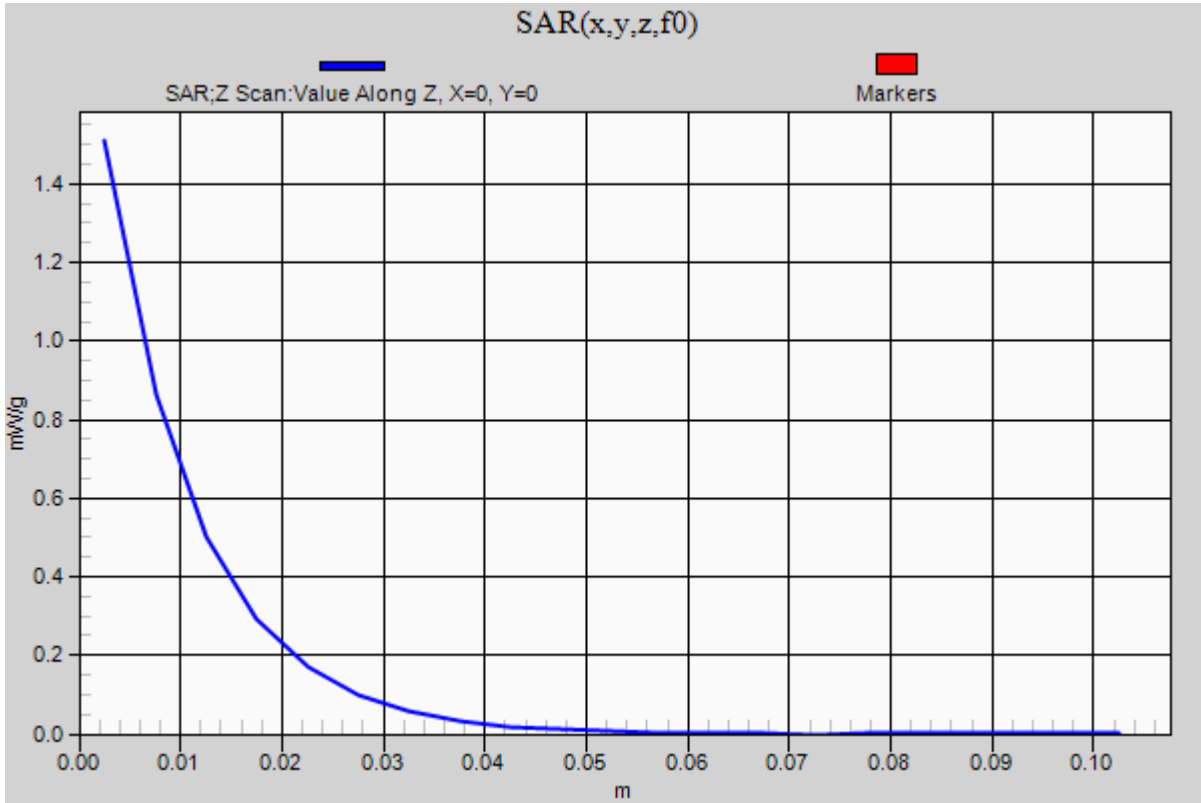

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.568$ mho/m; $\epsilon_r = 52.411$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/1xEVDO_Rel. 0_Ch 1175/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.006 mW/g

Rear/1xEVDO_Rel. 0_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.538 V/m; Power Drift = -0.0052 dB

Peak SAR (extrapolated) = 2.0120

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.516 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.601 mW/g

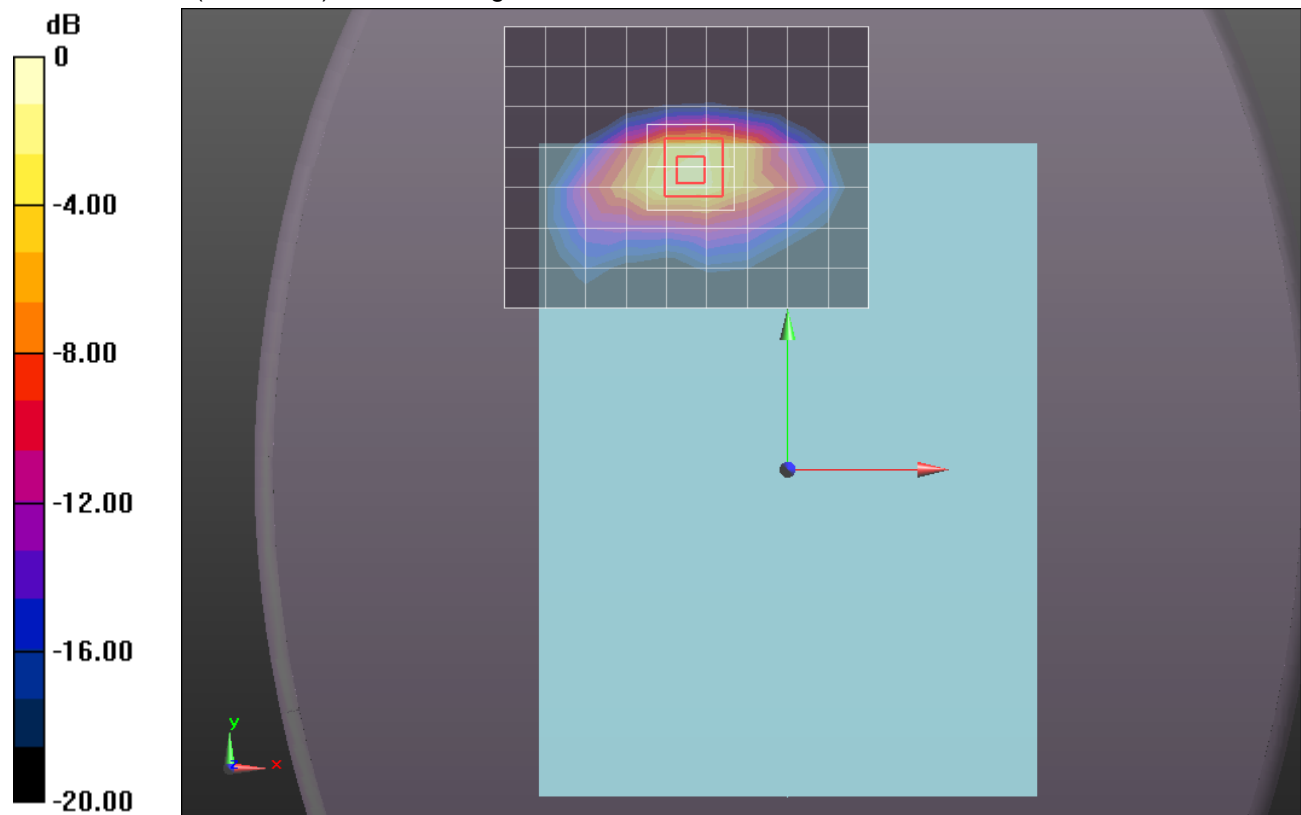

0 dB = 1.600mW/g = 4.08 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.478$ mho/m; $\epsilon_r = 51.544$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1/1xEVDO_Rel. 0_Ch 25/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.911 mW/g

Edge 1/1xEVDO_Rel. 0_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.734 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.2380

SAR(1 g) = 0.672 mW/g; SAR(10 g) = 0.324 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.982 mW/g

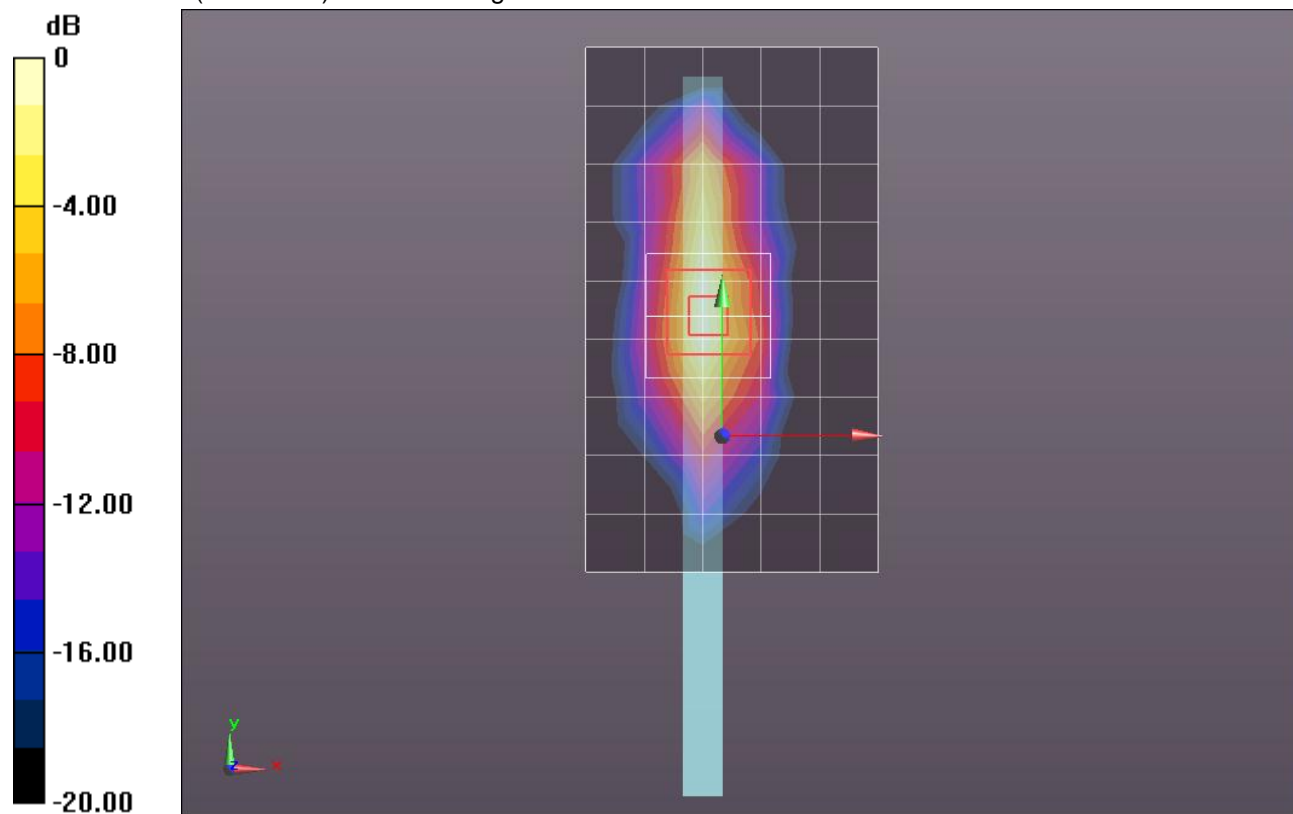

0 dB = 0.980mW/g = -0.18 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.514$ mho/m; $\epsilon_r = 51.49$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1/1xEVDO_Rel. 0_Ch 600/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.430 mW/g


Edge 1/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.972 V/m; Power Drift = 0.0056 dB

Peak SAR (extrapolated) = 1.5900

SAR(1 g) = 0.844 mW/g; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 1.265 mW/g

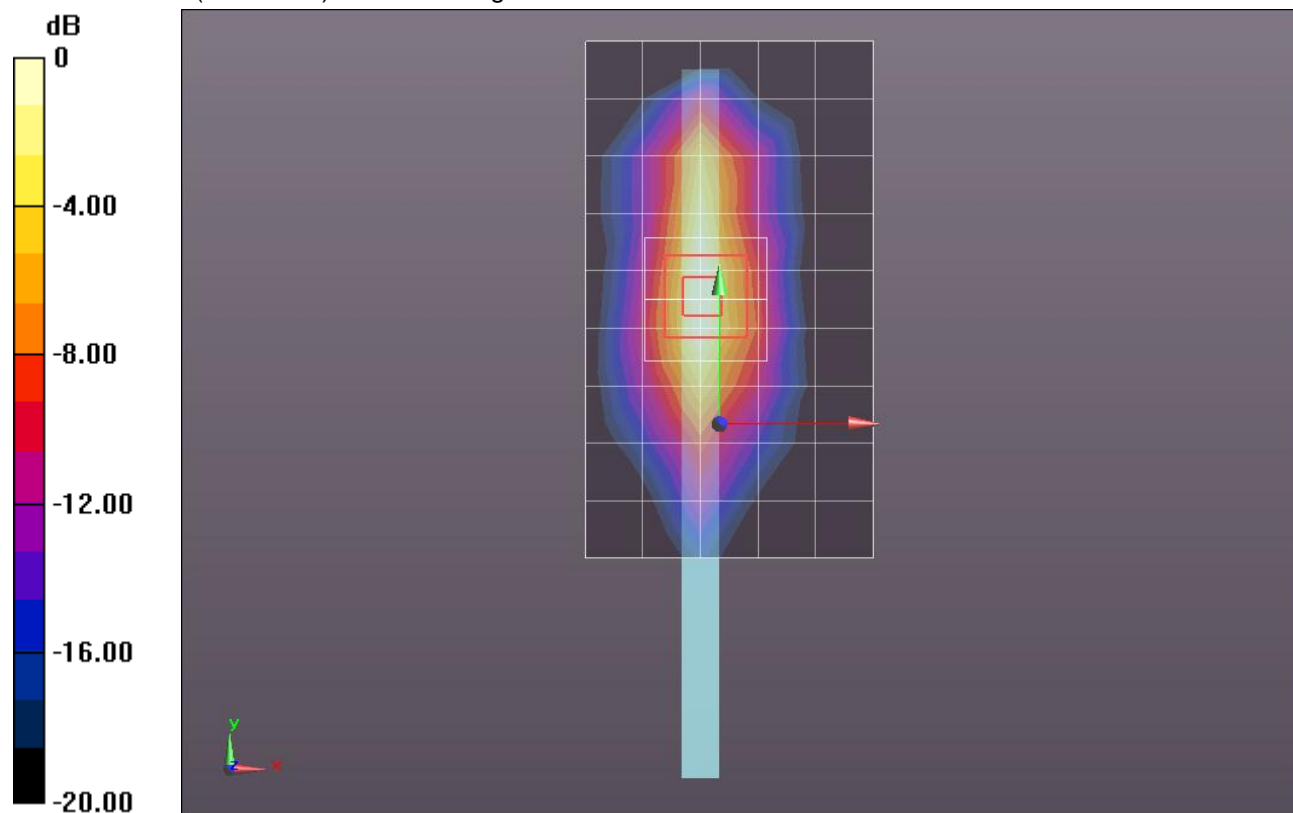

0 dB = 1.260mW/g = 2.01 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.552$ mho/m; $\epsilon_r = 51.376$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1/1xEVDO_Rel. 0_Ch 1175/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.067 mW/g

Edge 1/1xEVDO_Rel. 0_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.016 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.4540

SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.369 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.152 mW/g

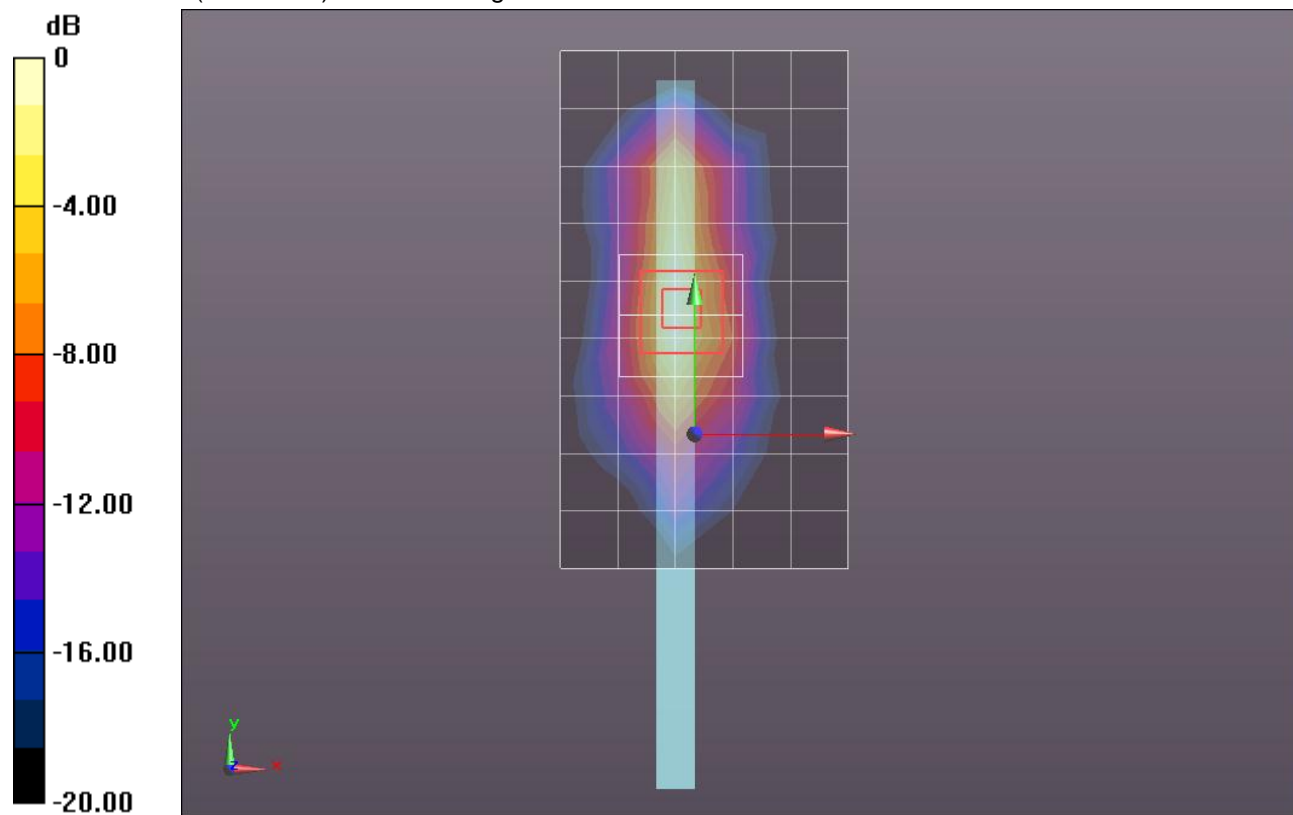

0 dB = 1.150mW/g = 1.21 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.478$ mho/m; $\epsilon_r = 51.544$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/1xEVDO_Rel. 0_Ch 25/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.316 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rel. 0_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.697 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.7970

SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.440 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.397 mW/g

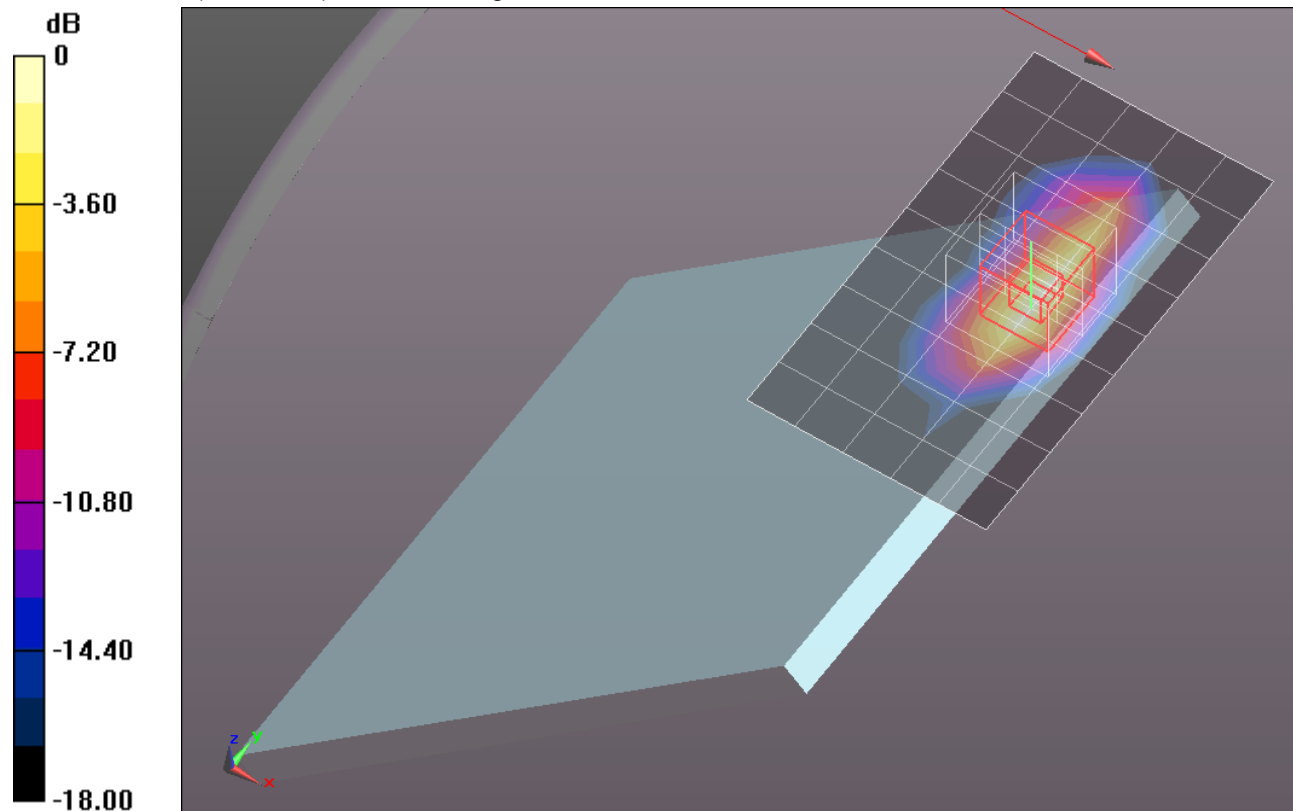

0 dB = 1.400mW/g = 2.92 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.514$ mho/m; $\epsilon_r = 51.49$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/1xEVDO_Rel. 0_Ch 600/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.613 mW/g


41 deg Tilt @ Edge 1/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.936 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.1220

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.504 mW/g

Maximum value of SAR (measured) = 1.689 mW/g

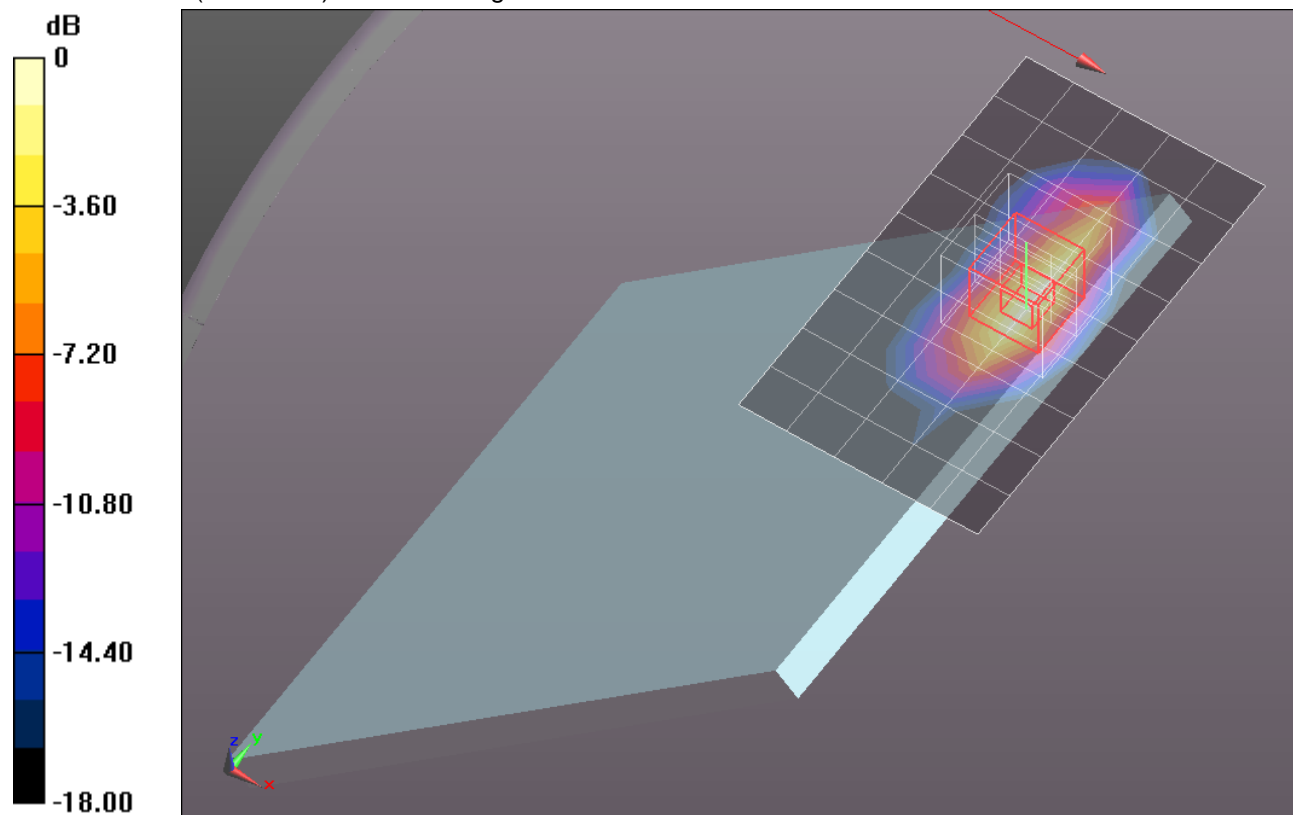

0 dB = 1.690mW/g = 4.56 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.552$ mho/m; $\epsilon_r = 51.376$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/1xEVDO_Rel. 0_Ch 1175/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.389 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rel. 0_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.420 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.8200

SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.419 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.335 mW/g

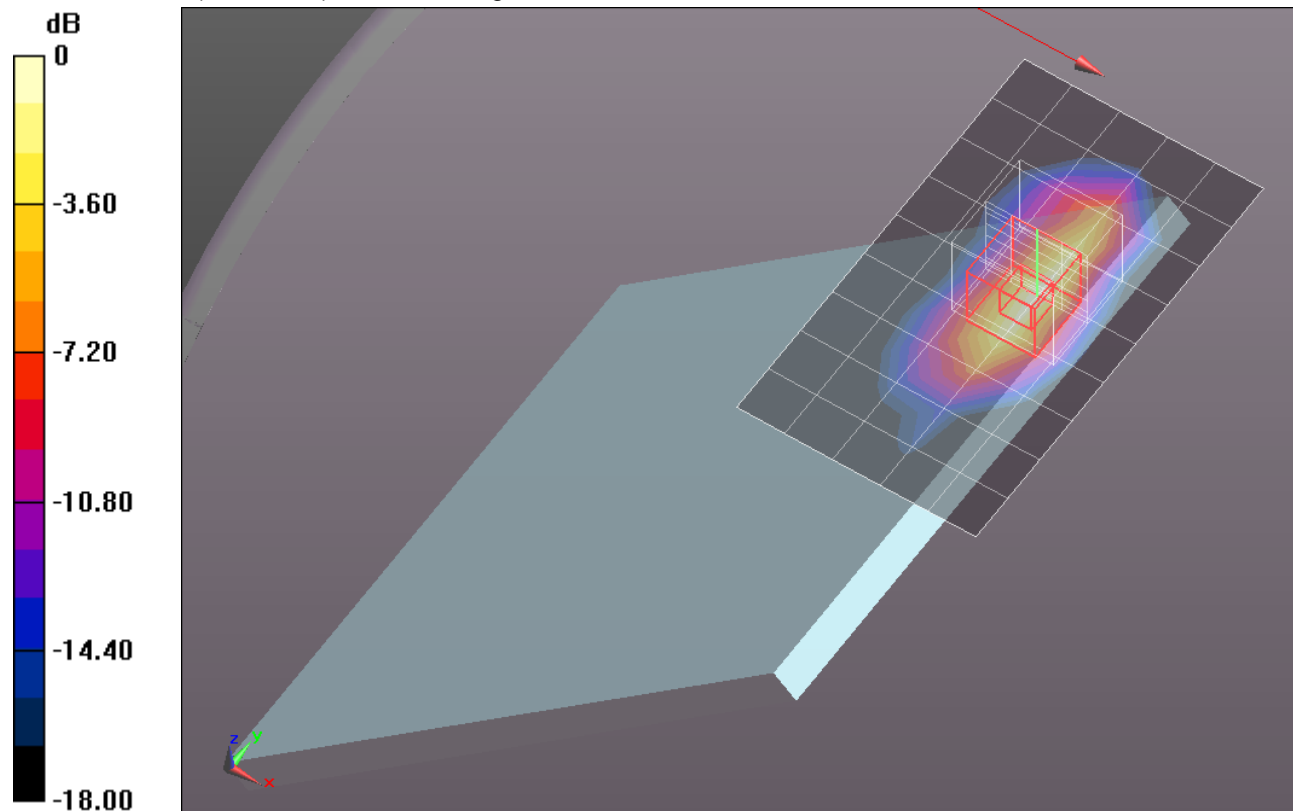

0 dB = 1.340mW/g = 2.54 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.673$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/1xEVDO_Rel. 0__Ch 25/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.764 mW/g

Rear with 12mm/1xEVDO_Rel. 0__Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.340 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.9970

SAR(1 g) = 0.625 mW/g; SAR(10 g) = 0.358 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.813 mW/g

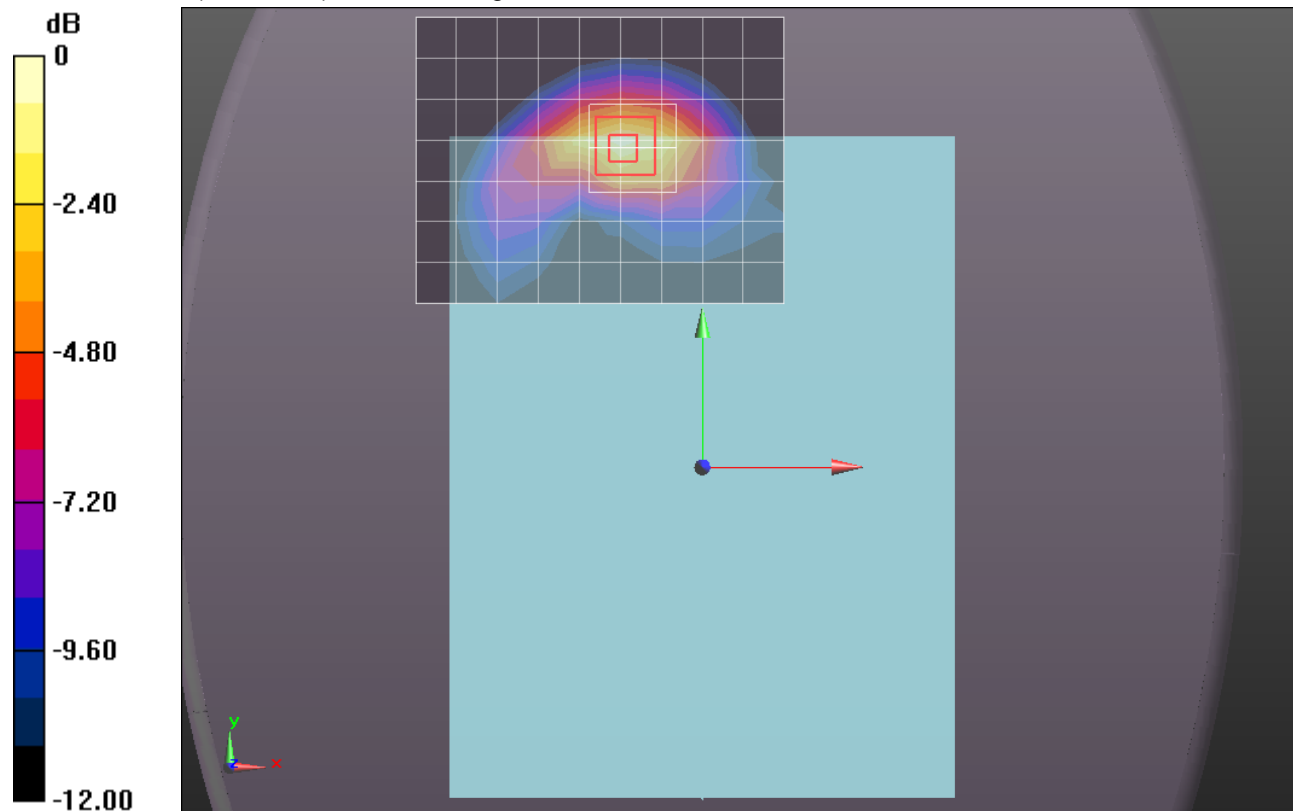

0 dB = 0.810mW/g = -1.83 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.519$ mho/m; $\epsilon_r = 51.58$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/1xEVDO_Rel. 0_Ch 600/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.016 mW/g


Rear with 12mm/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.666 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.3290

SAR(1 g) = 0.817 mW/g; SAR(10 g) = 0.467 mW/g

Maximum value of SAR (measured) = 1.105 mW/g

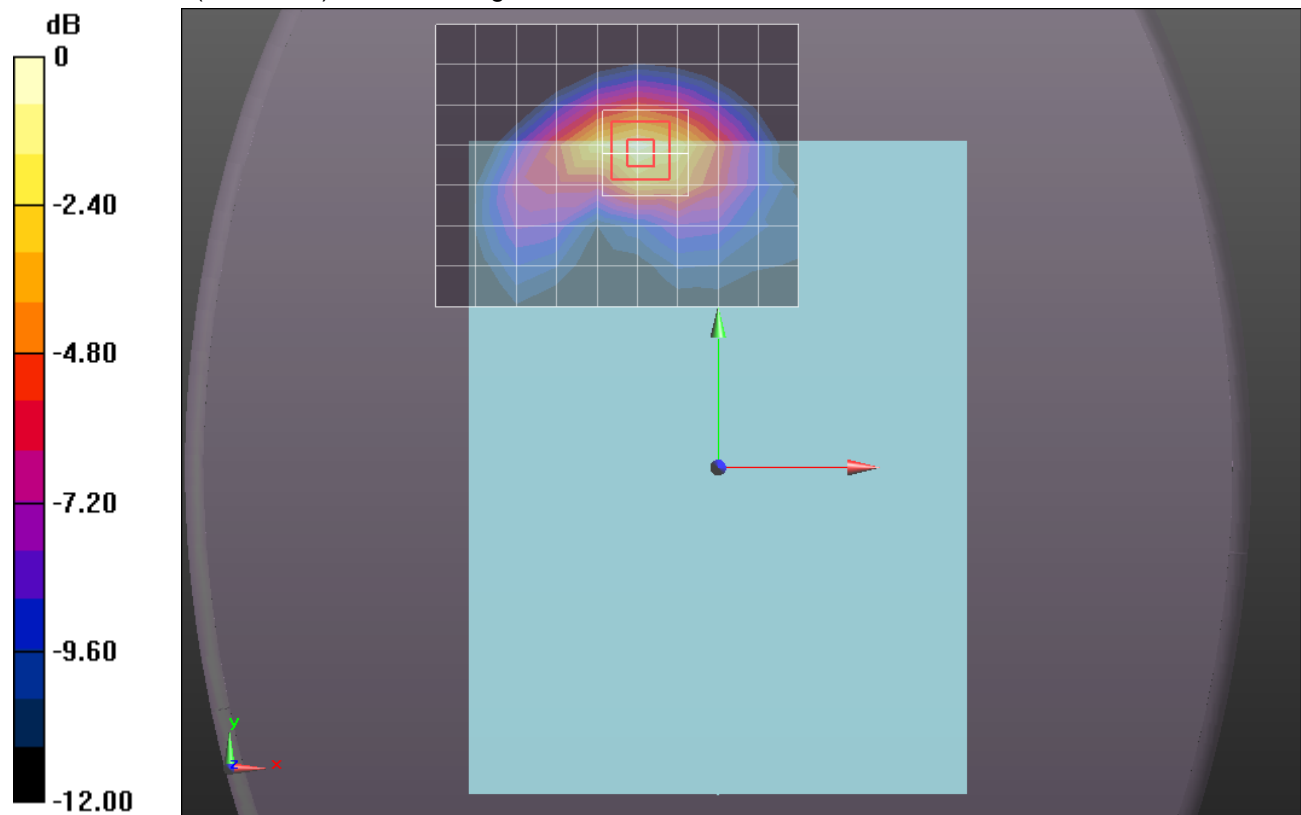

0 dB = 1.100mW/g = 0.83 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r = 51.485$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/1xEVDO_Rel. 0_Ch 1175/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.034 mW/g

Rear with 12mm/1xEVDO_Rel. 0_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.826 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.3380

SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.476 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.072 mW/g

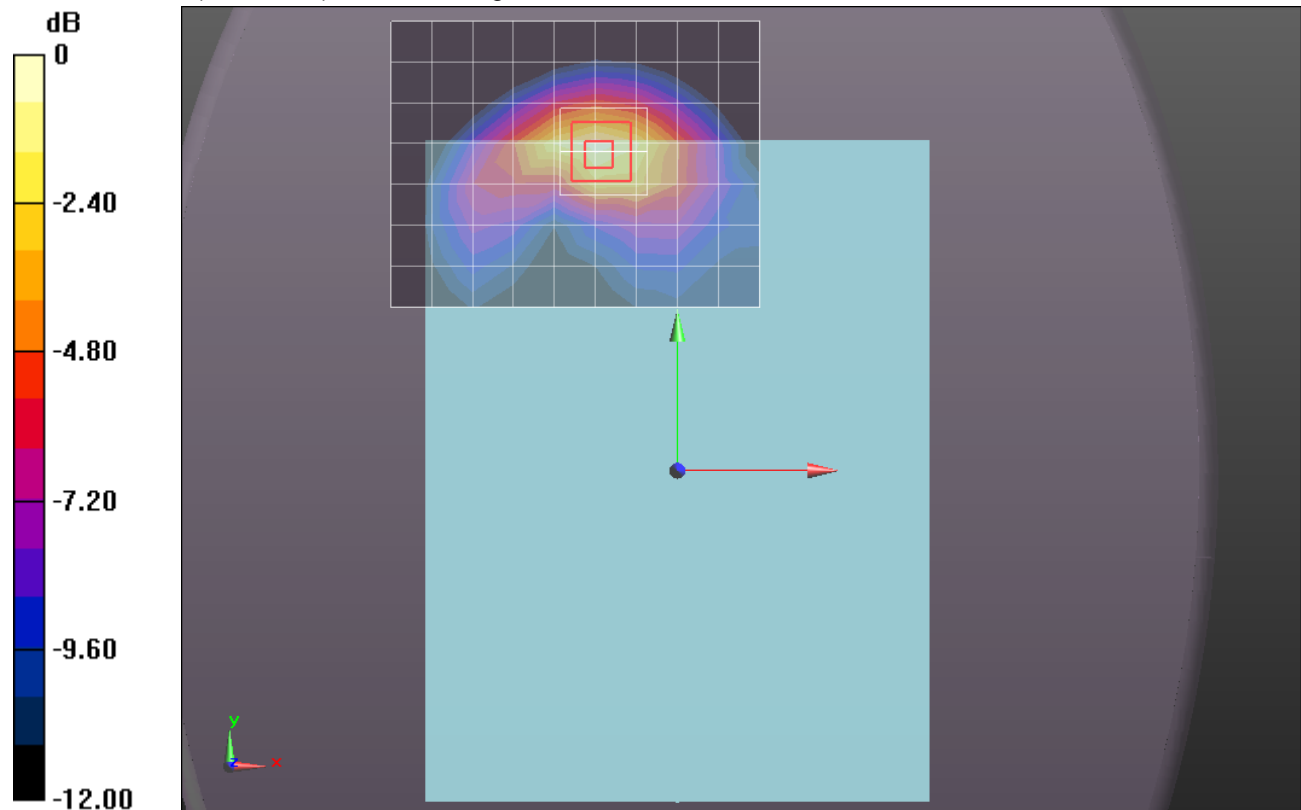

0 dB = 1.070mW/g = 0.59 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.673$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/1xEVDO_Rel. 0_Ch 25/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.755 mW/g

Edge 1 with 14mm/1xEVDO_Rel. 0_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.189 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.9690

SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.376 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.820 mW/g

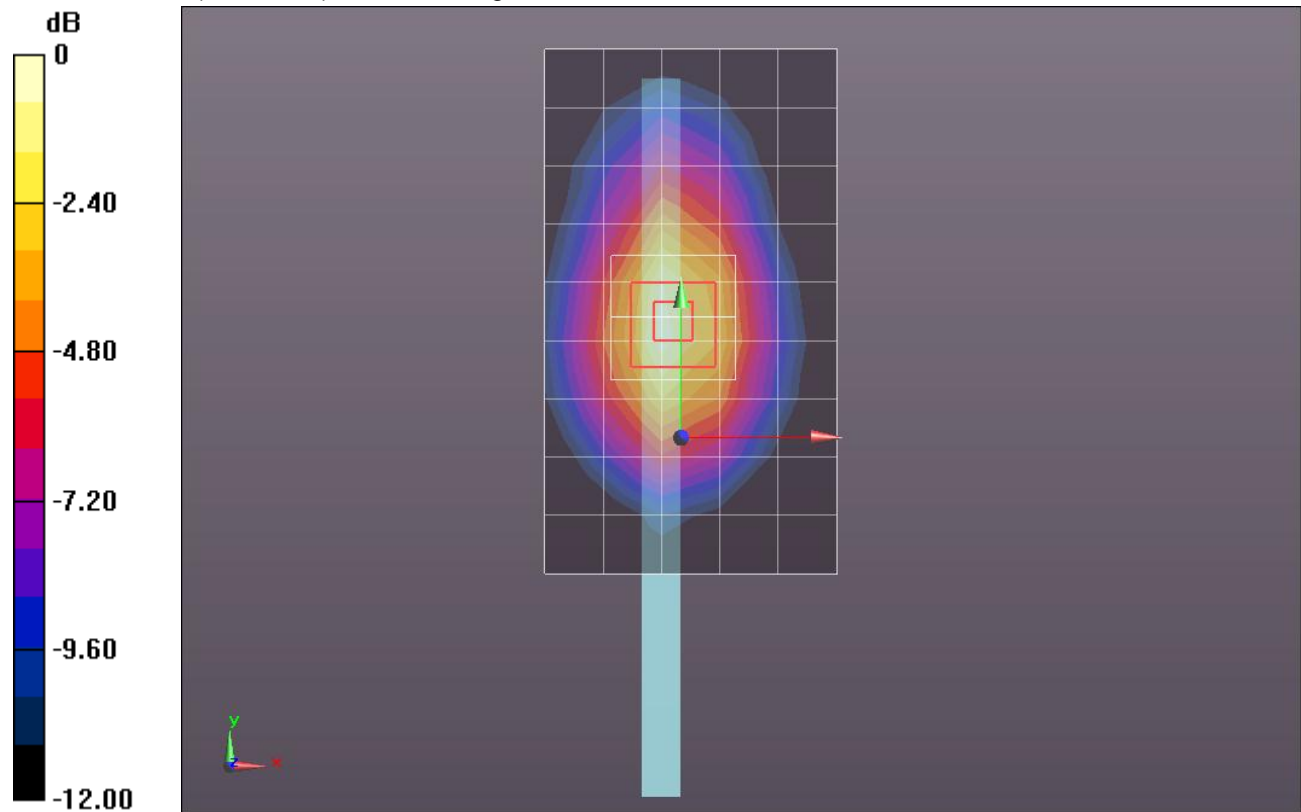

0 dB = 0.820mW/g = -1.72 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.519$ mho/m; $\epsilon_r = 51.58$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/1xEVDO_Rel. 0_Ch 600/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.045 mW/g


Edge 1 with 14mm/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.544 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.3120

SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.501 mW/g

Maximum value of SAR (measured) = 1.101 mW/g

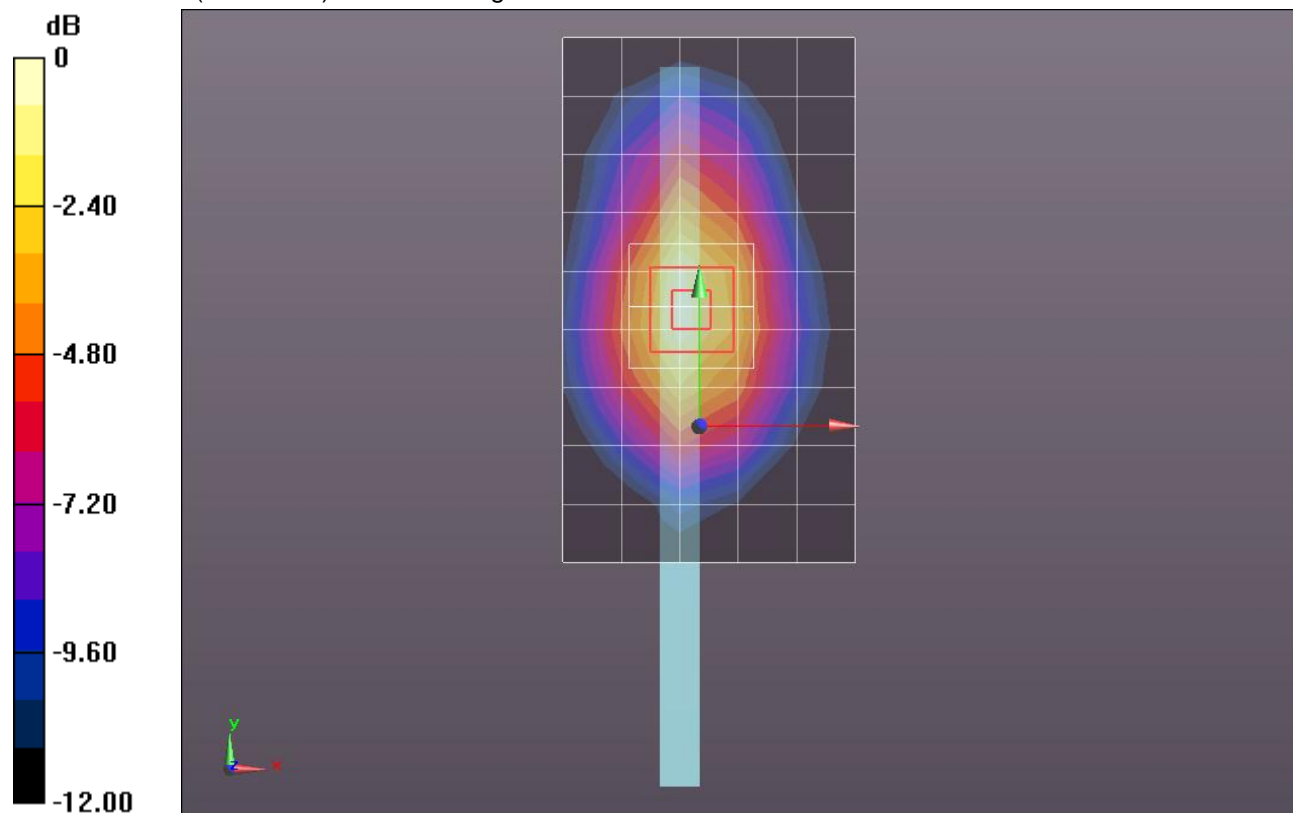

0 dB = 1.100mW/g = 0.83 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r = 51.485$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/1xEVDO_Rel. 0_Ch 1175/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.053 mW/g

Edge 1 with 14mm/1xEVDO_Rel. 0_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.456 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.3790

SAR(1 g) = 0.856 mW/g; SAR(10 g) = 0.506 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.139 mW/g

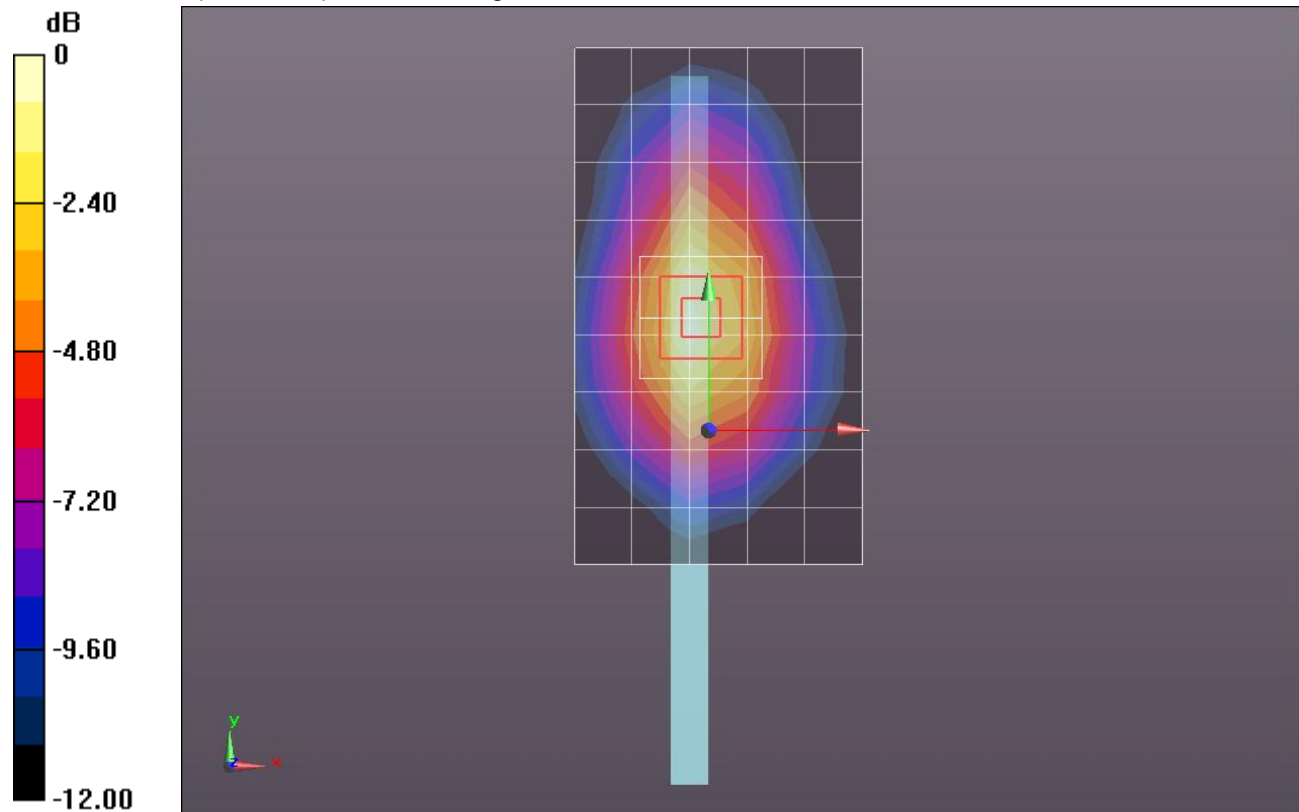

0 dB = 1.140mW/g = 1.14 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.519$ mho/m; $\epsilon_r = 51.58$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

27 deg Right Tilt @ Edge 1/1xEVDO_Rel. 0_Ch. 600/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.625 mW/g

27 deg Right Tilt @ Edge 1/1xEVDO_Rel. 0_Ch. 600/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.547 V/m; Power Drift = 0.0016 dB

Peak SAR (extrapolated) = 0.9740

SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.756 mW/g

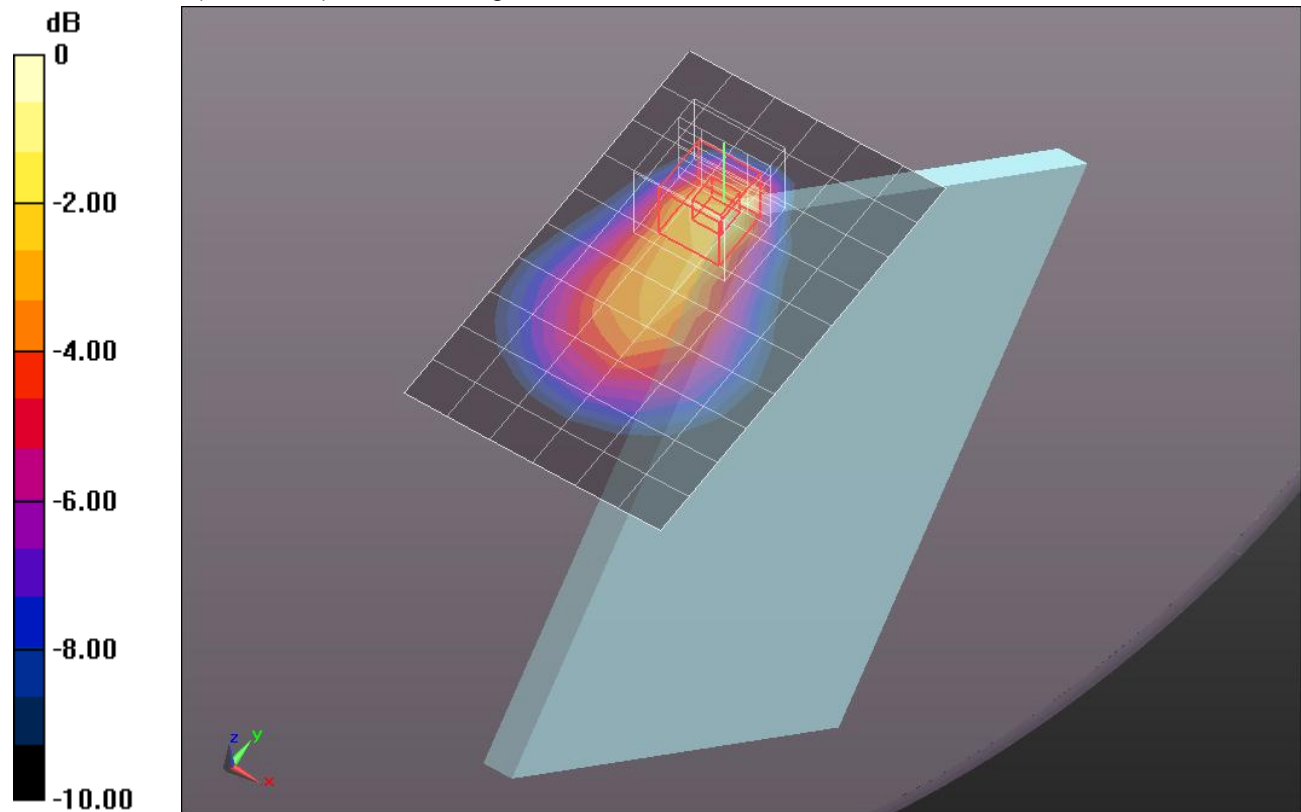

0 dB = 0.760mW/g = -2.38 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.519$ mho/m; $\epsilon_r = 51.58$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 2/1xEVDO_Rel. 0_Ch. 600/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.644 mW/g

Edge 2/1xEVDO_Rel. 0_Ch. 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,


dz=5mm

Reference Value = 20.833 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.8450

SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.677 mW/g

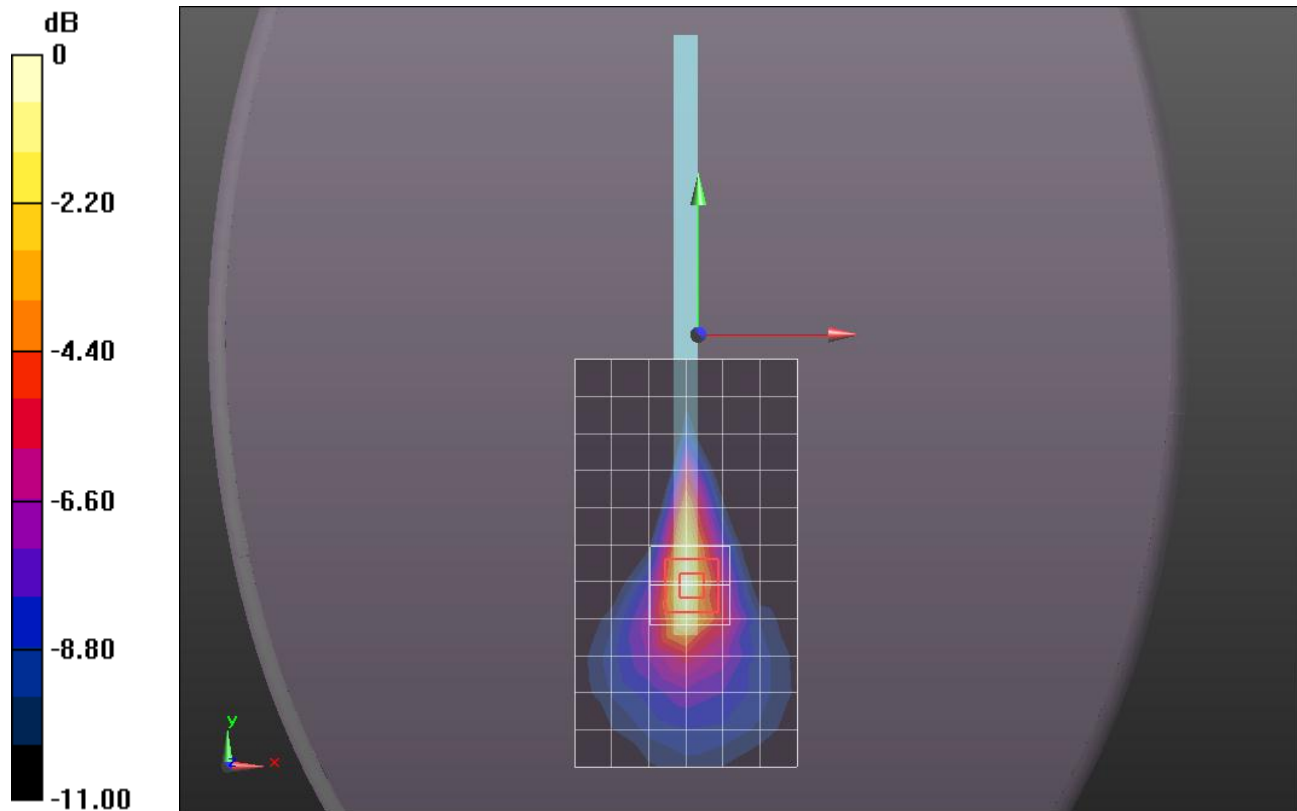

0 dB = 0.680mW/g = -3.35 dB mW/g