

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.456$ mho/m; $\epsilon_r = 52.567$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/Rel. 99 RMC 12.2kbps_Ch 9262/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.926 mW/g

Rear/Rel. 99 RMC 12.2kbps_Ch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.472 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.7680

SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.442 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.399 mW/g

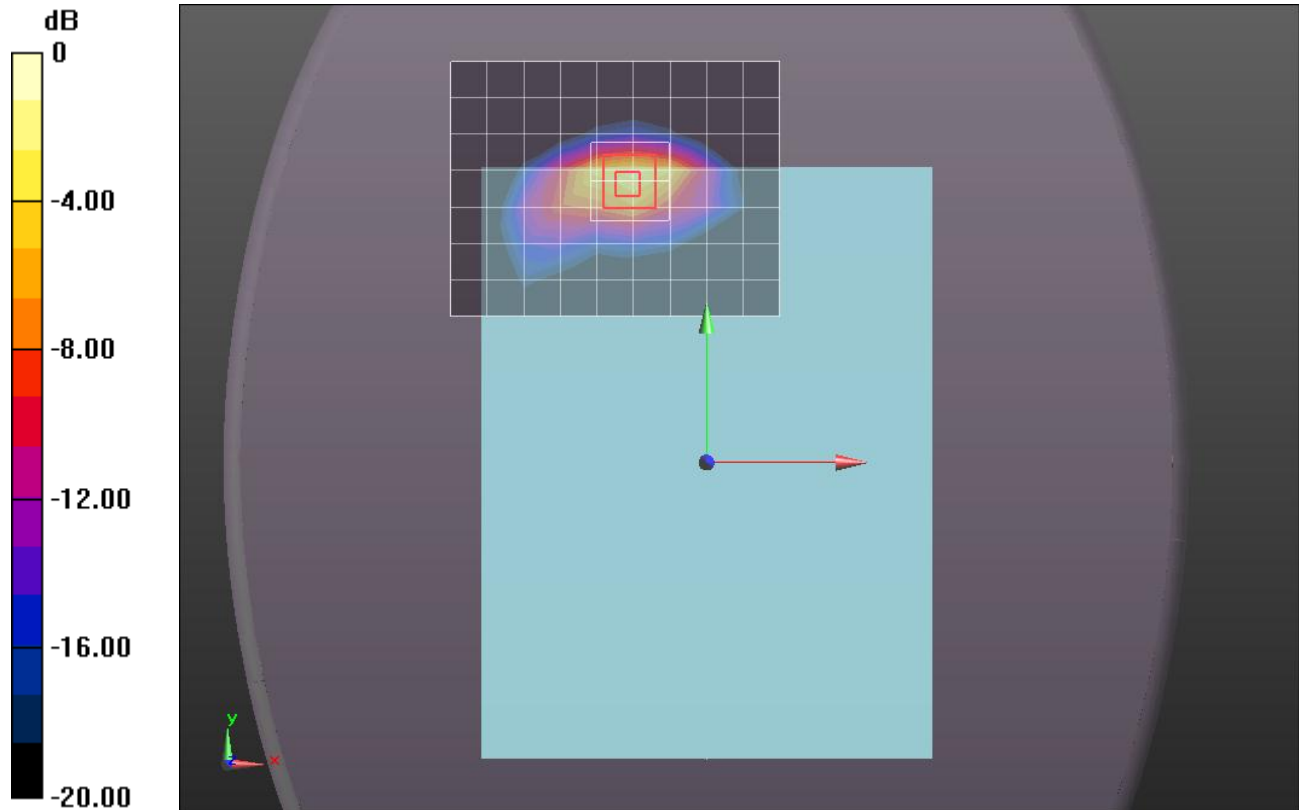

0 dB = 1.400mW/g = 2.92 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 52.535$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/Rel. 99 RMC 12.2kbps_Ch 9400/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.886 mW/g


Rear/Rel. 99 RMC 12.2kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.675 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.7360

SAR(1 g) = 0.921 mW/g; SAR(10 g) = 0.434 mW/g

Maximum value of SAR (measured) = 1.364 mW/g

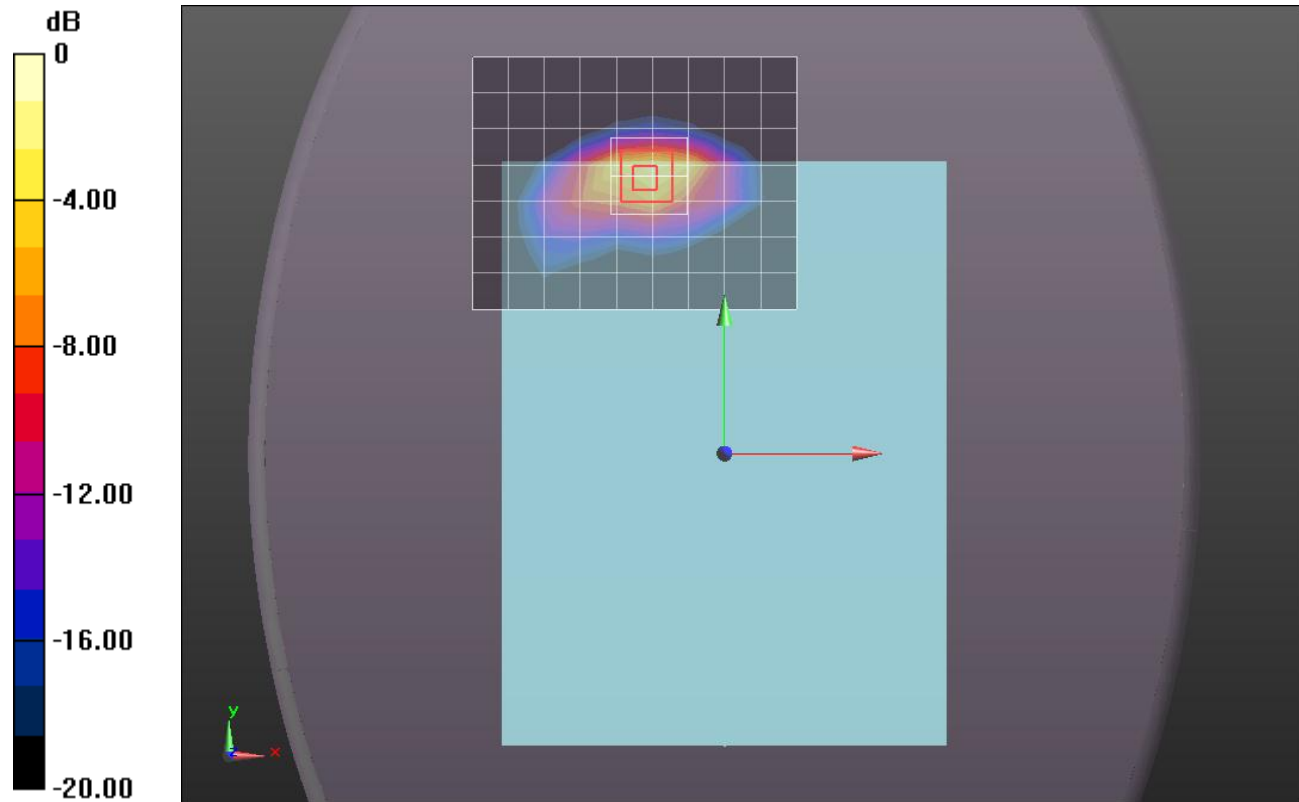

0 dB = 1.360mW/g = 2.67 dB mW/g

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.524$ mho/m; $\epsilon_r = 52.452$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear/Rel. 99 RMC 12.2kbps_Ch 9538/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.112 mW/g

Rear/Rel. 99 RMC 12.2kbps_Ch 9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.964 V/m; Power Drift = 0.0065 dB

Peak SAR (extrapolated) = 2.2080

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.556 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.720 mW/g

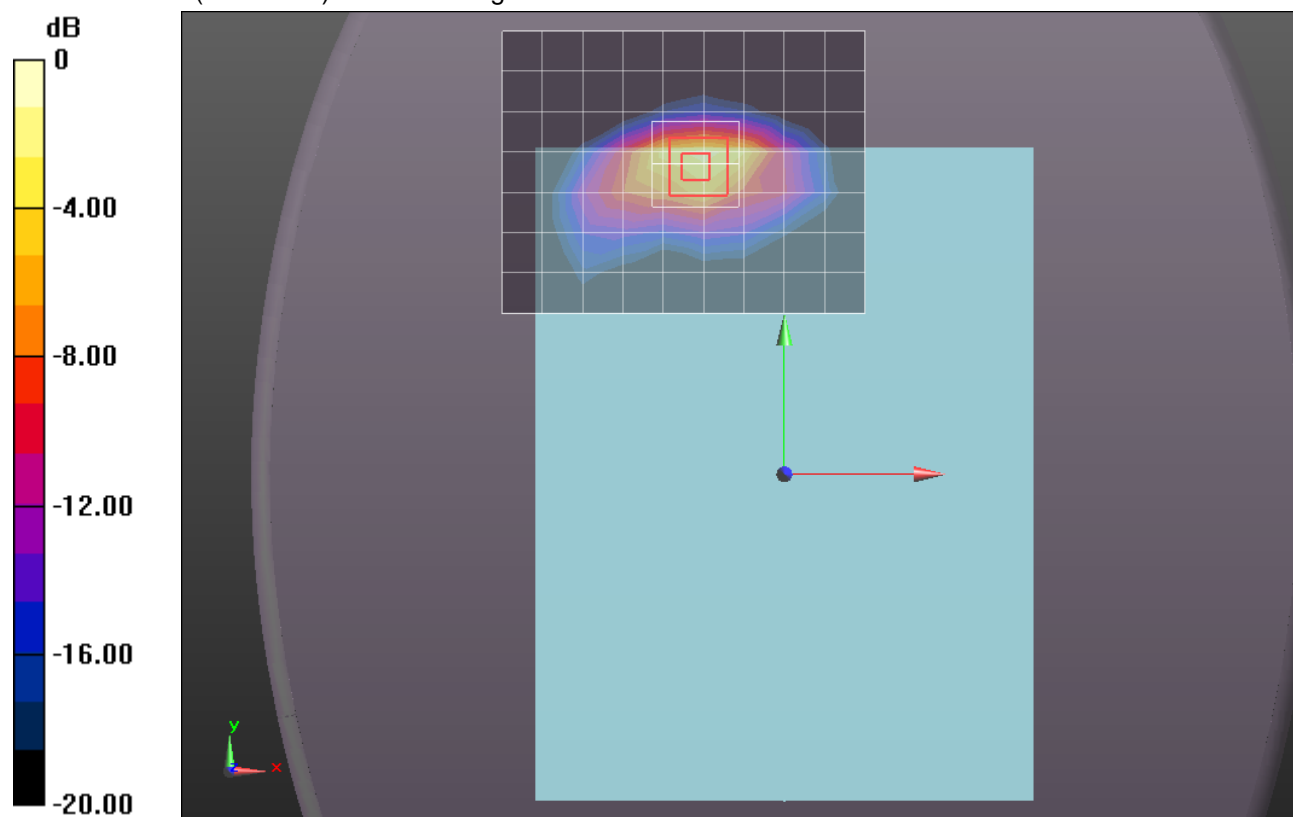

0 dB = 1.720mW/g = 4.71 dB mW/g


W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1

Rear/Rel. 99 RMC 12.2kbps_Ch 9538/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.618 mW/g

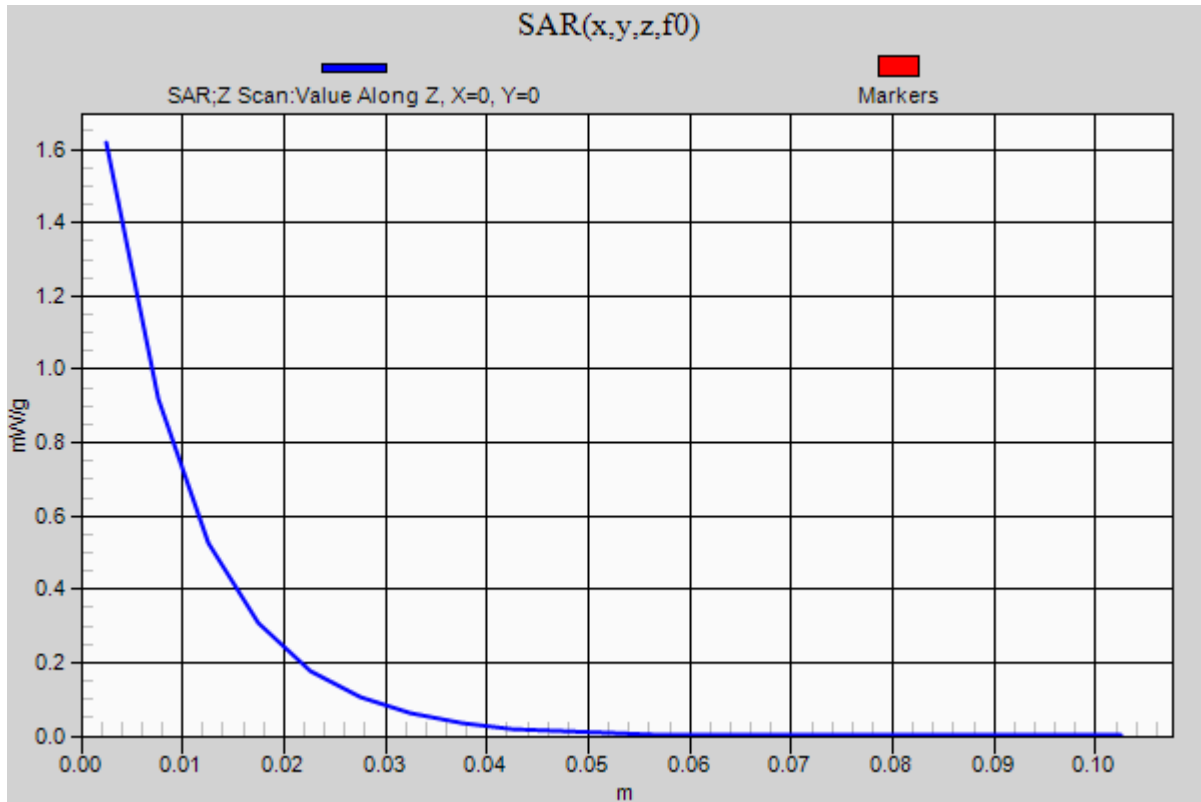

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 52.535$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.845 mW/g


Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.908 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.2060

SAR(1 g) = 0.643 mW/g; SAR(10 g) = 0.307 mW/g

Maximum value of SAR (measured) = 0.962 mW/g

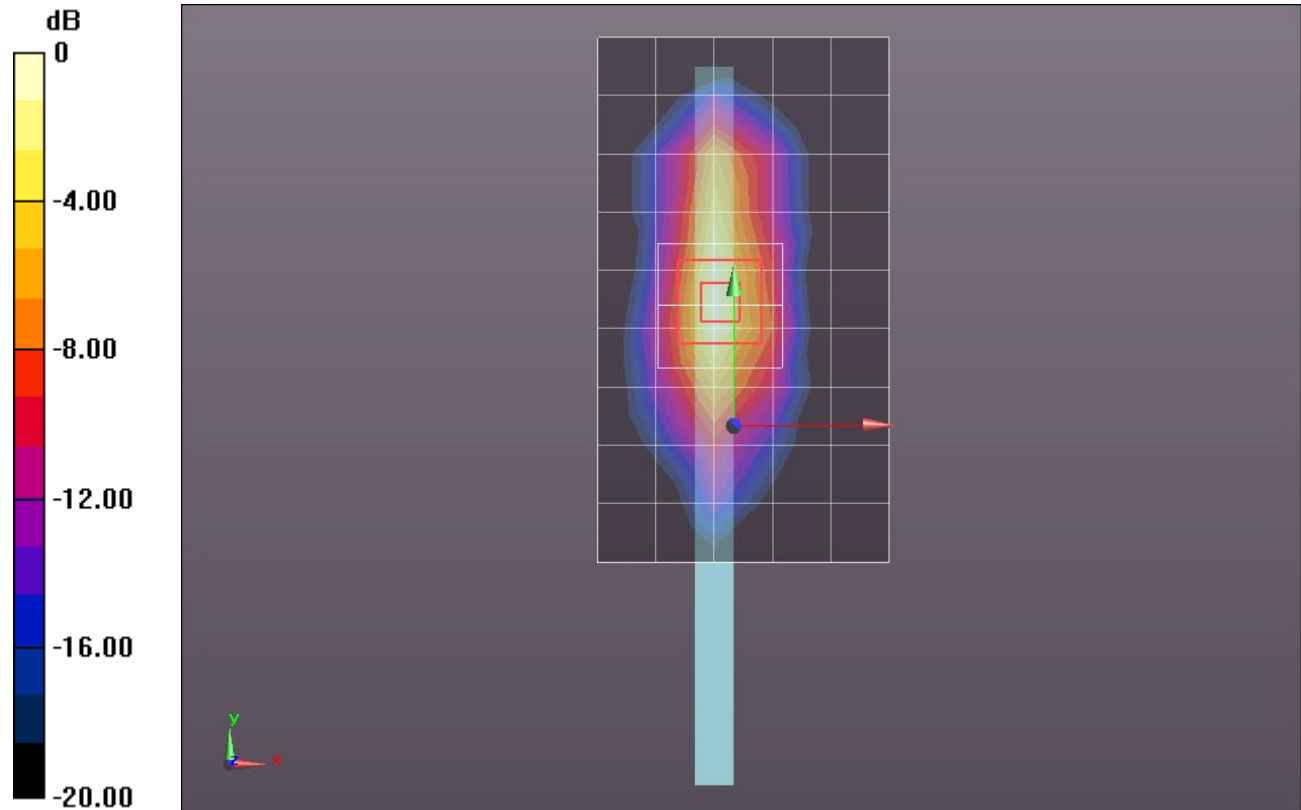

0 dB = 0.960mW/g = -0.35 dB mW/g

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.456$ mho/m; $\epsilon_r = 52.567$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9262/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.316 mW/g

41 deg Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9262/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.868 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.8290

SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.441 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.456 mW/g

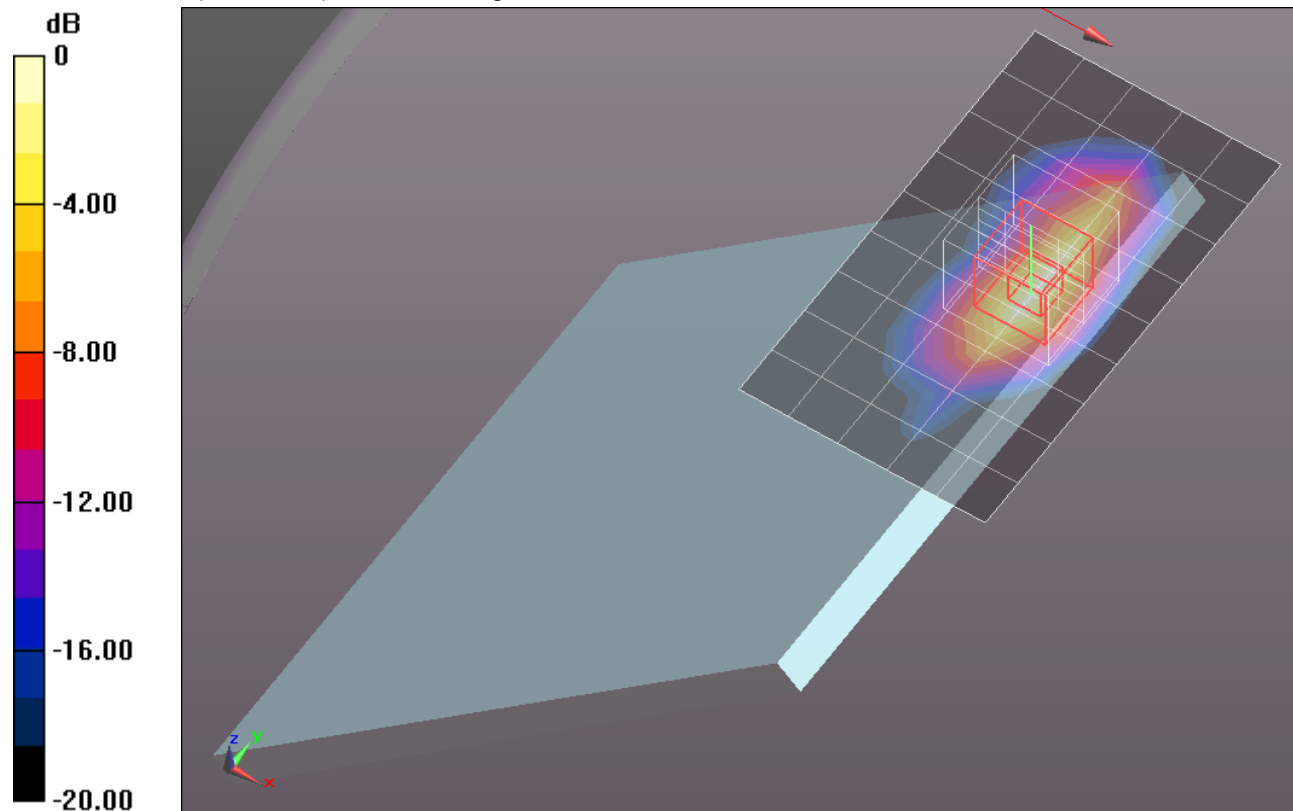

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 52.535$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Area Scan (6x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.217 mW/g

41 deg Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 29.259 V/m; Power Drift = -0.0088 dB

Peak SAR (extrapolated) = 1.6760

SAR(1 g) = 0.866 mW/g; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 1.331 mW/g

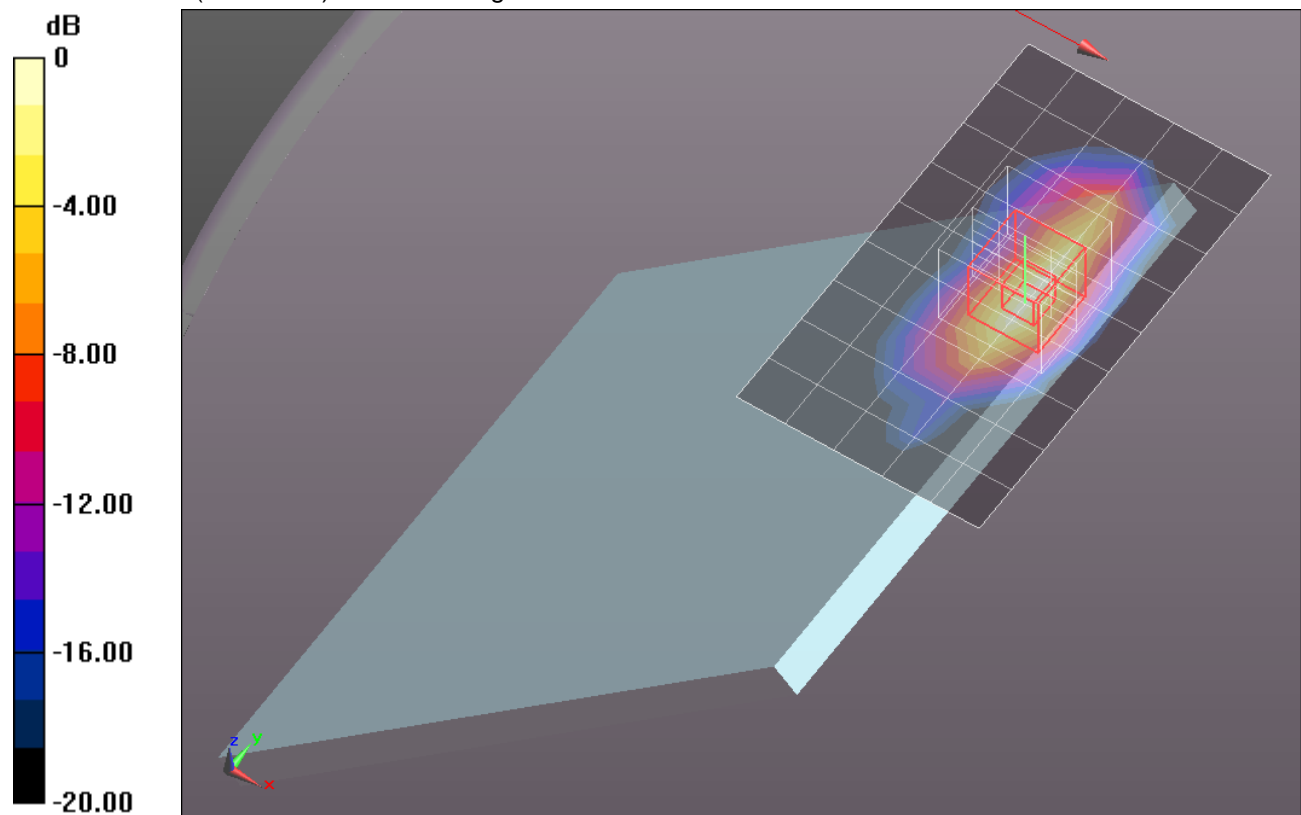

0 dB = 1.330mW/g = 2.48 dB mW/g

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.524$ mho/m; $\epsilon_r = 52.452$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

41 deg Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9538/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.416 mW/g

41 deg Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9538/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.932 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.9370

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.464 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.529 mW/g

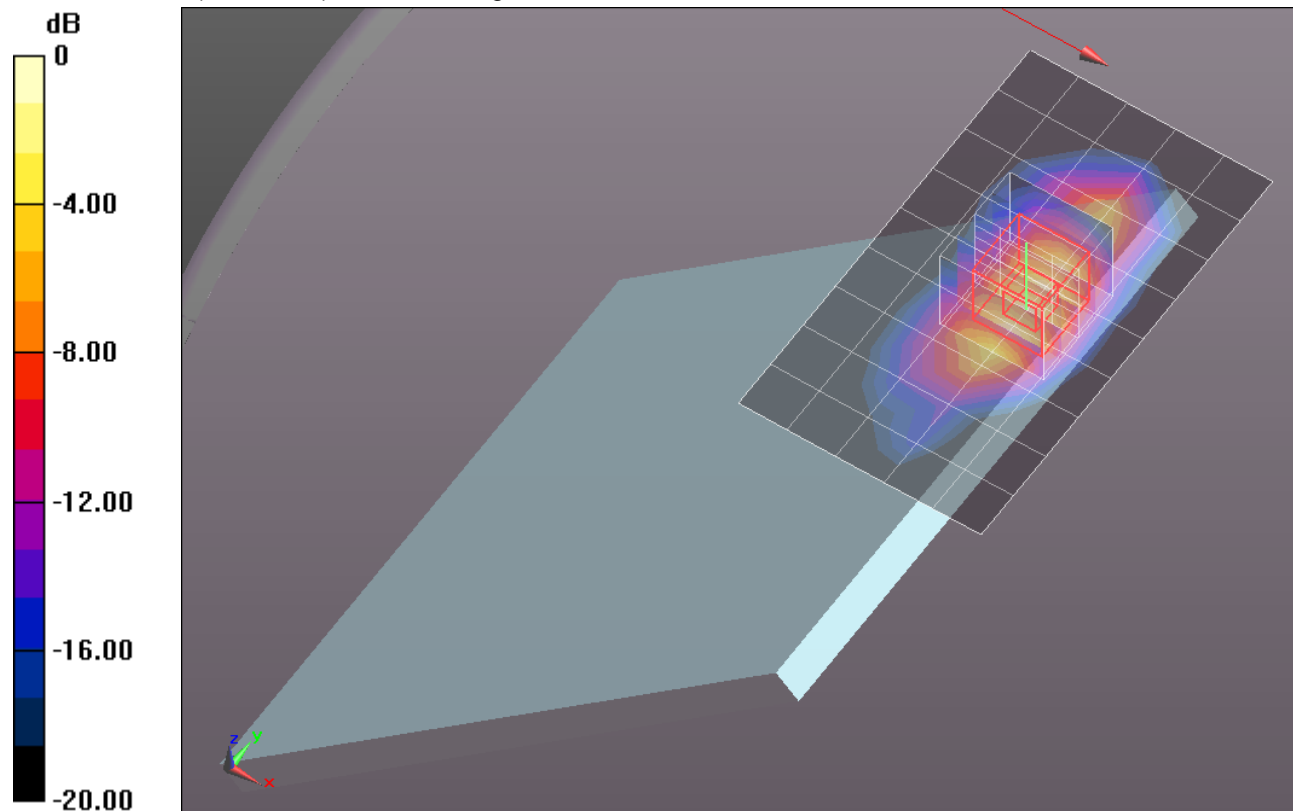

0 dB = 1.530mW/g = 3.69 dB mW/g

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.456$ mho/m; $\epsilon_r = 52.567$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9262/Area Scan (10x8x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.775 mW/g

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.898 V/m; Power Drift = 0.0075 dB

Peak SAR (extrapolated) = 1.1110

SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.400 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.928 mW/g

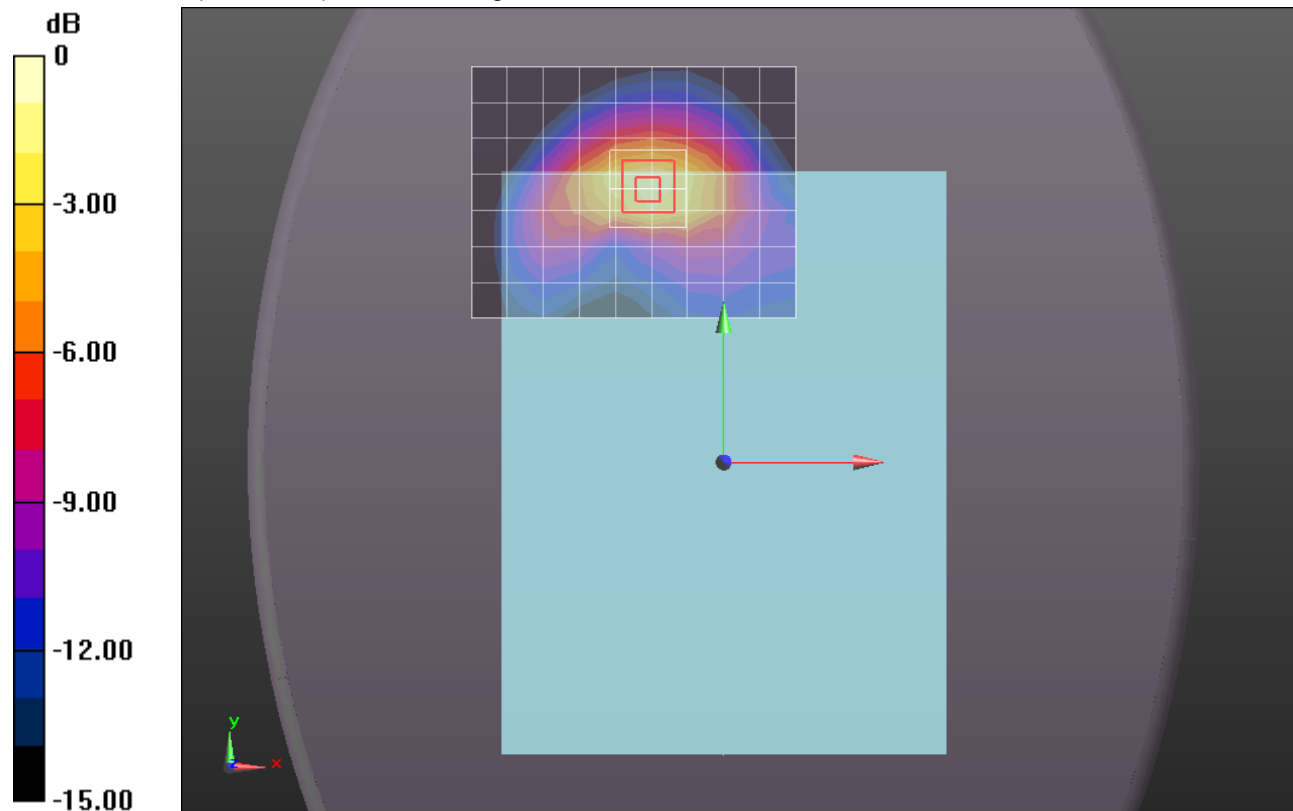

0 dB = 0.930mW/g = -0.63 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 52.535$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9400/Area Scan (10x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.933 mW/g

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.270 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.3580

SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.481 mW/g

Maximum value of SAR (measured) = 1.128 mW/g

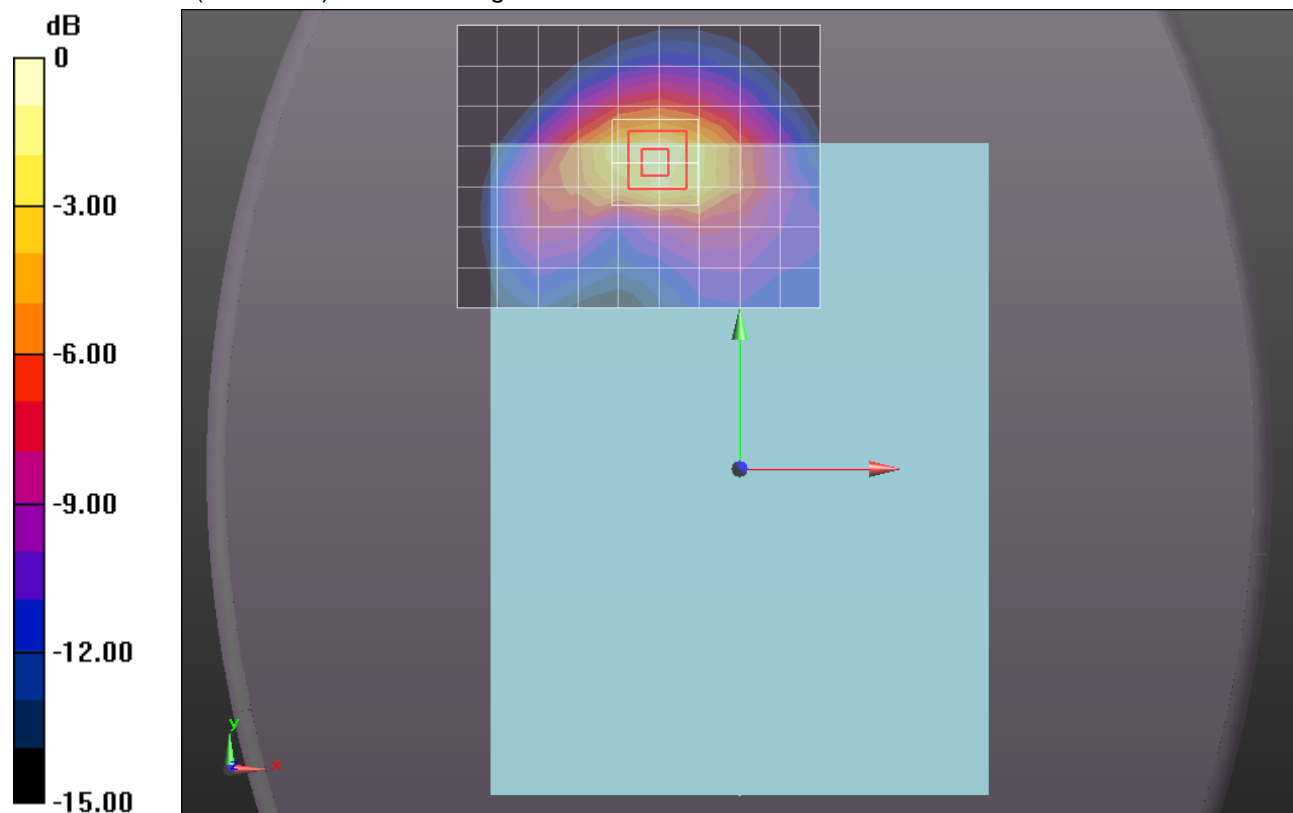

0 dB = 1.130mW/g = 1.06 dB mW/g

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.524$ mho/m; $\epsilon_r = 52.452$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9538/Area Scan (10x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.942 mW/g

Rear with 12mm/Rel. 99 RMC 12.2 kbps_Ch 9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 27.374 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.4040

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.493 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.164 mW/g

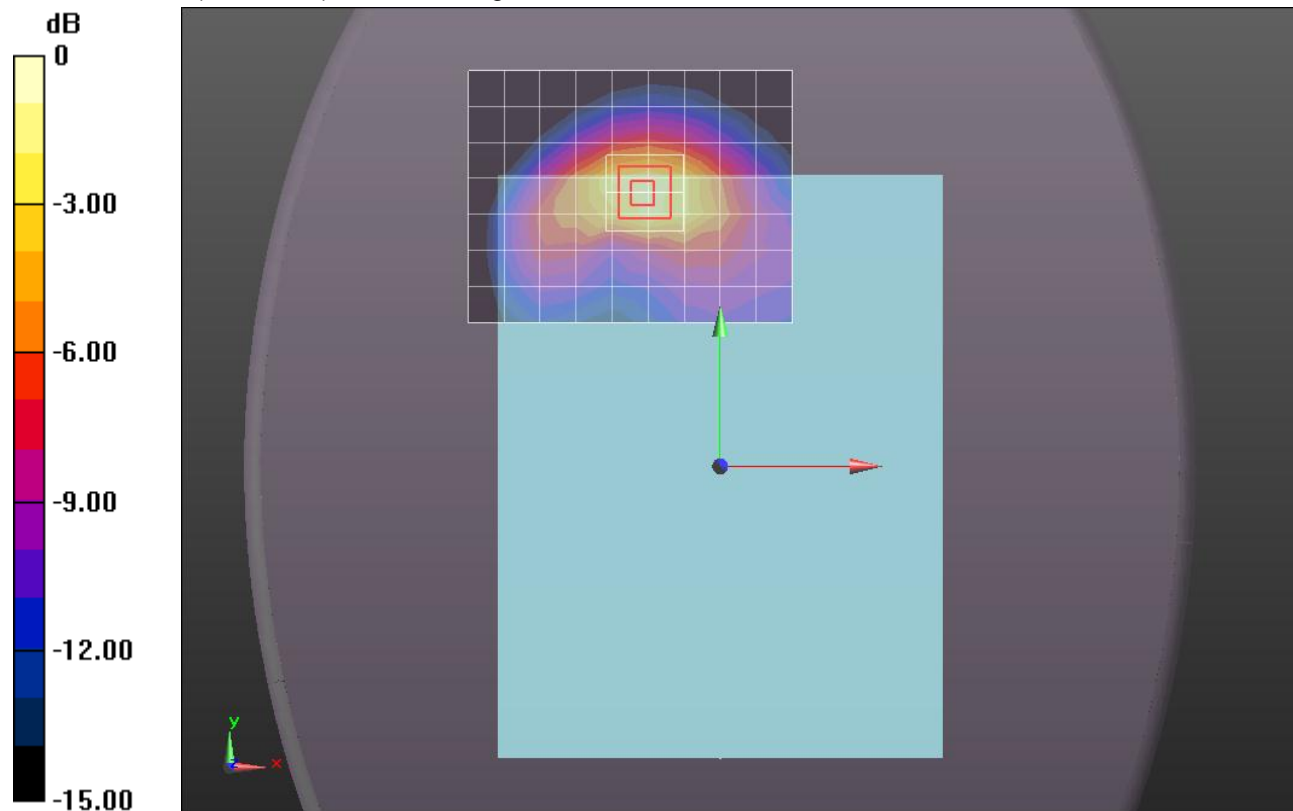

0 dB = 1.160mW/g = 1.29 dB mW/g

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.502$ mho/m; $\epsilon_r = 52.662$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9262/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.916 mW/g

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9262/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.459 V/m; Power Drift = -0.0044 dB

Peak SAR (extrapolated) = 1.0880

SAR(1 g) = 0.699 mW/g; SAR(10 g) = 0.414 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.915 mW/g

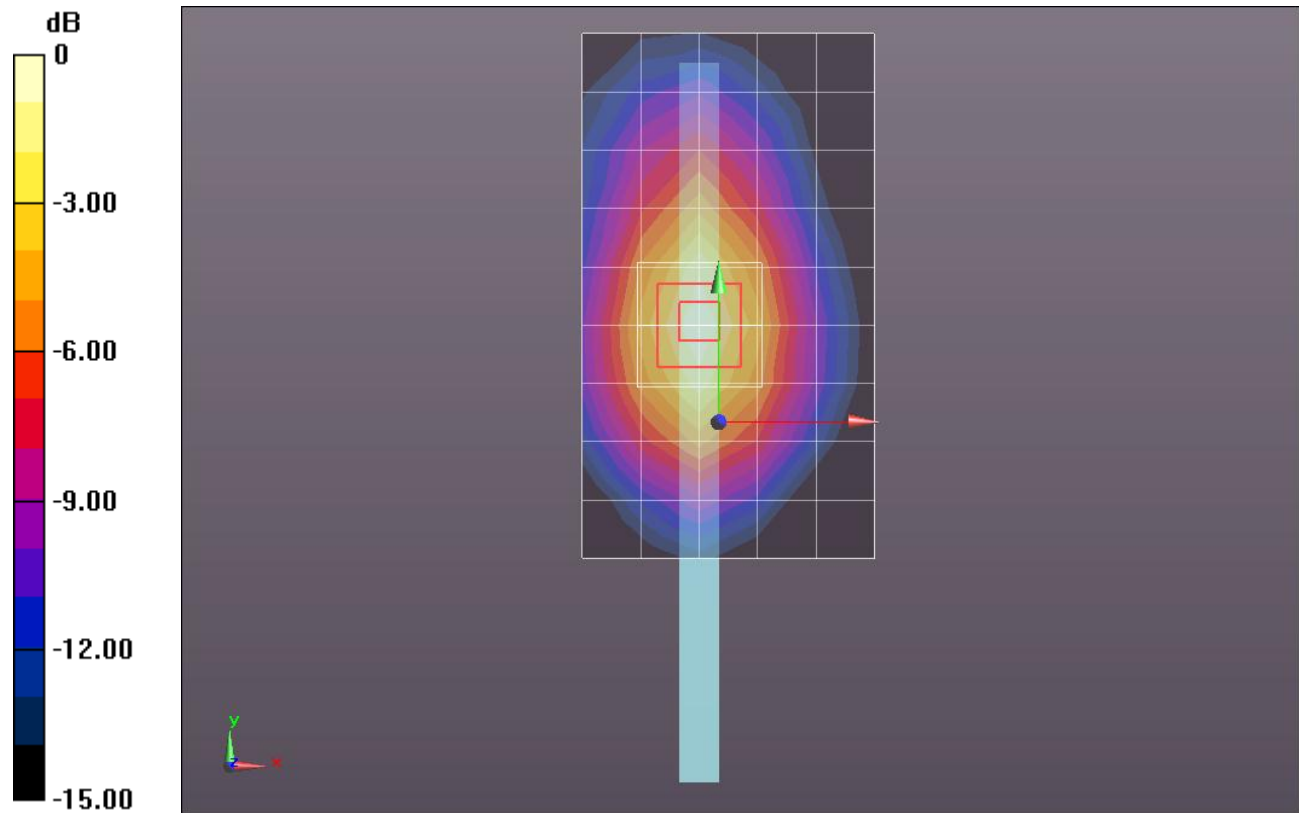

0 dB = 0.910mW/g = -0.82 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 52.535$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9400/Area Scan (6x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.178 mW/g

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 28.053 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.4260

SAR(1 g) = 0.915 mW/g; SAR(10 g) = 0.543 mW/g

Maximum value of SAR (measured) = 1.198 mW/g

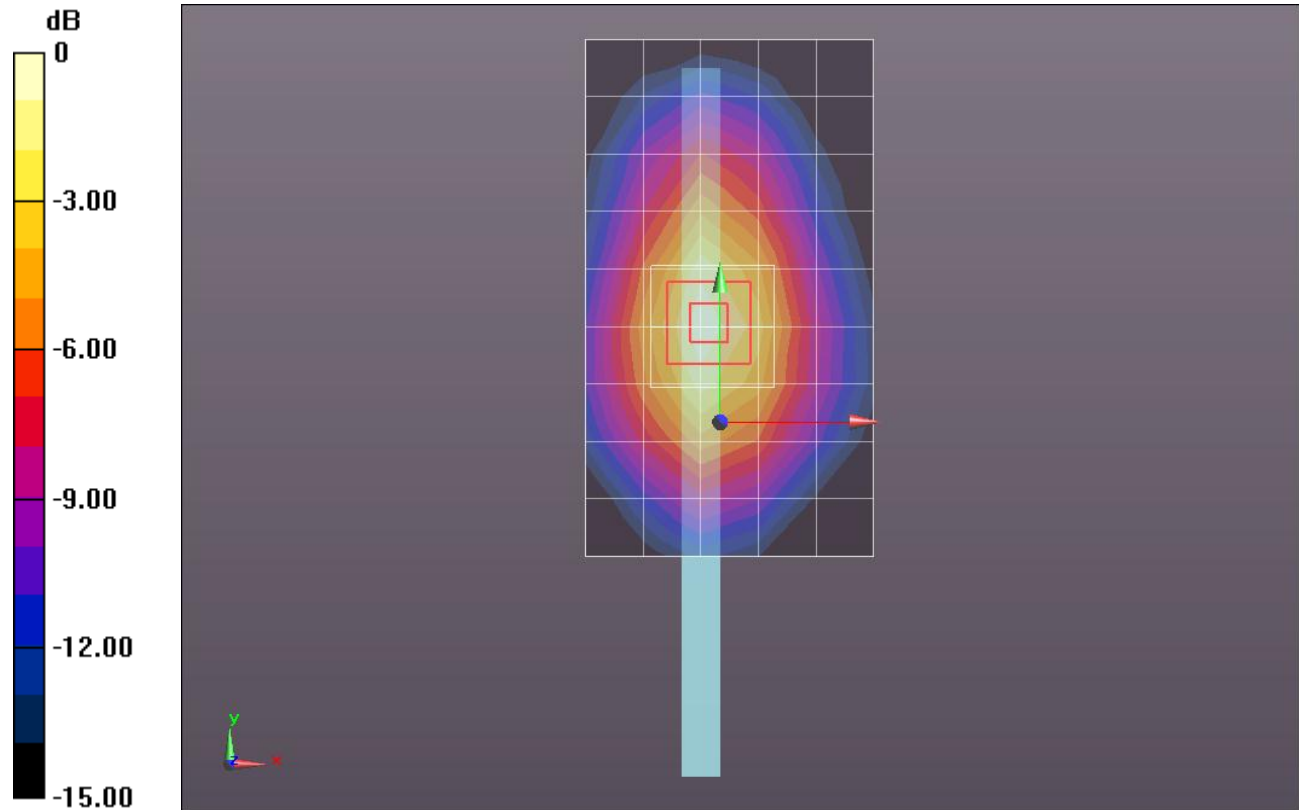

0 dB = 1.200mW/g = 1.58 dB mW/g

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.569$ mho/m; $\epsilon_r = 52.431$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9538/Area Scan (6x10x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.355 mW/g

Edge 1 with 14mm/Rel. 99 RMC 12.2kbps_ ch 9538/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 29.116 V/m; Power Drift = 0.00029 dB

Peak SAR (extrapolated) = 1.6300

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.603 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.358 mW/g

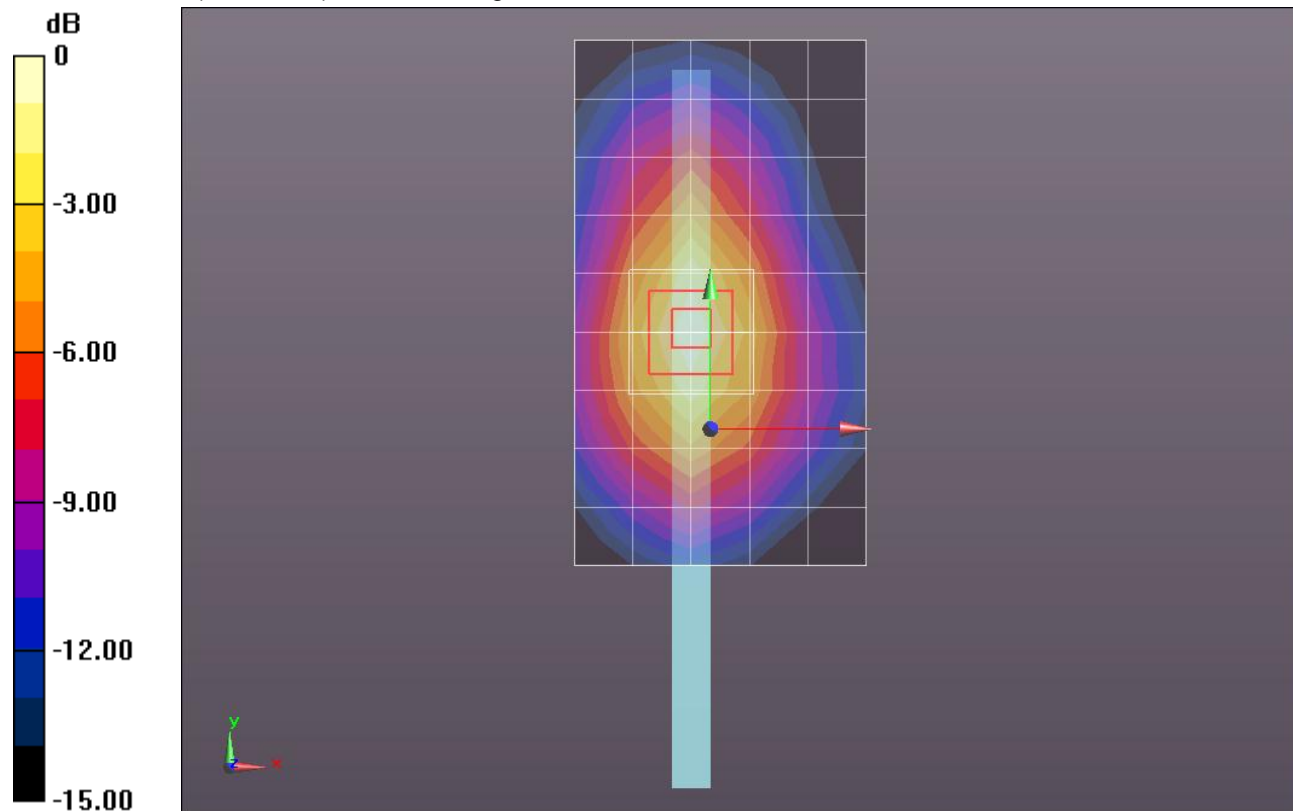

0 dB = 1.360mW/g = 2.67 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.538$ mho/m; $\epsilon_r = 52.546$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

27 deg Right Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.673 mW/g

27 deg Right Tilt @ Edge 1/Rel. 99 RMC 12.2kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.550 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.2190

SAR(1 g) = 0.659 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.908 mW/g

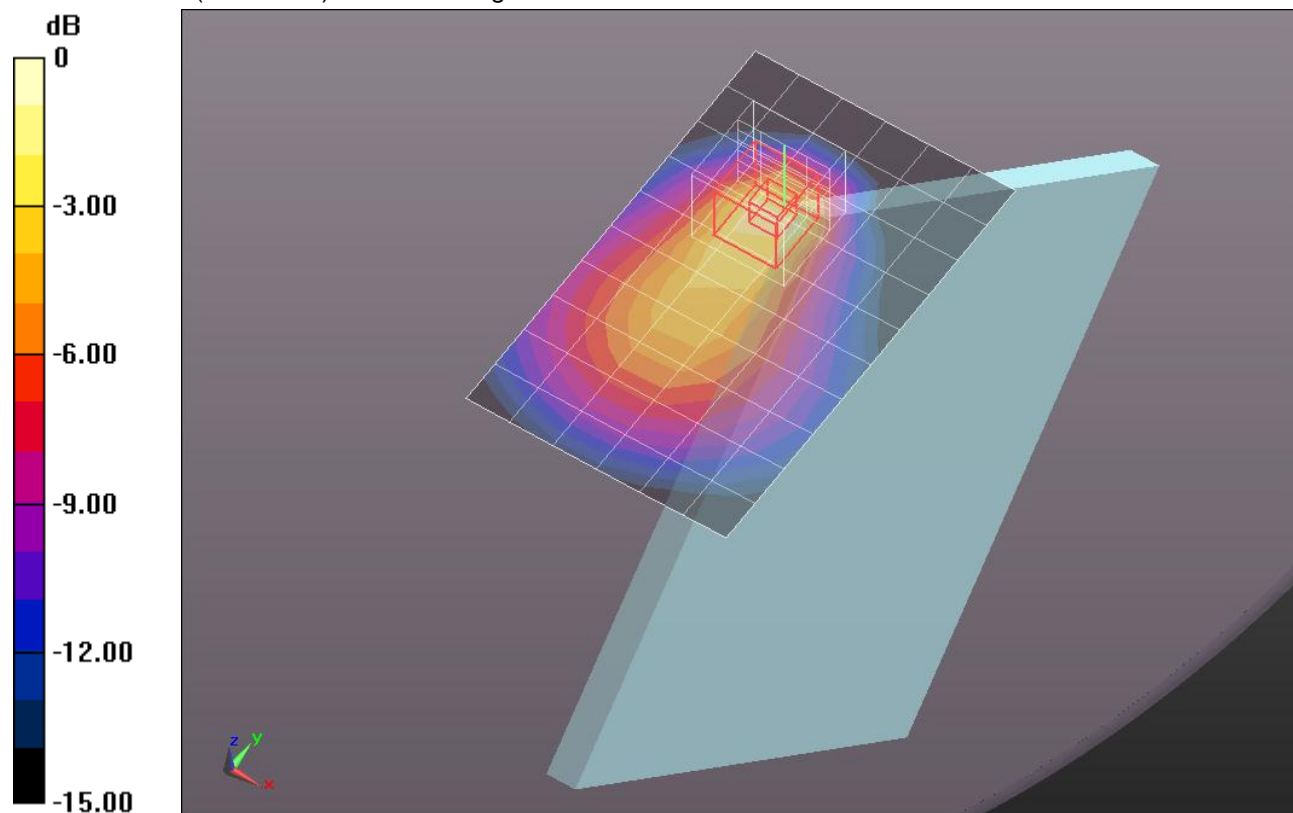

0 dB = 0.910mW/g = -0.82 dB mW/g

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.538$ mho/m; $\epsilon_r = 52.546$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1263; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3778; ConvF(6.89, 6.89, 6.89); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1134

Edge 2/Rel. 99 RMC 12.2kbps_Ch 9400/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.643 mW/g


Edge 2/Rel. 99 RMC 12.2kbps_Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.003 V/m; Power Drift = -0.00092 dB

Peak SAR (extrapolated) = 0.8380

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

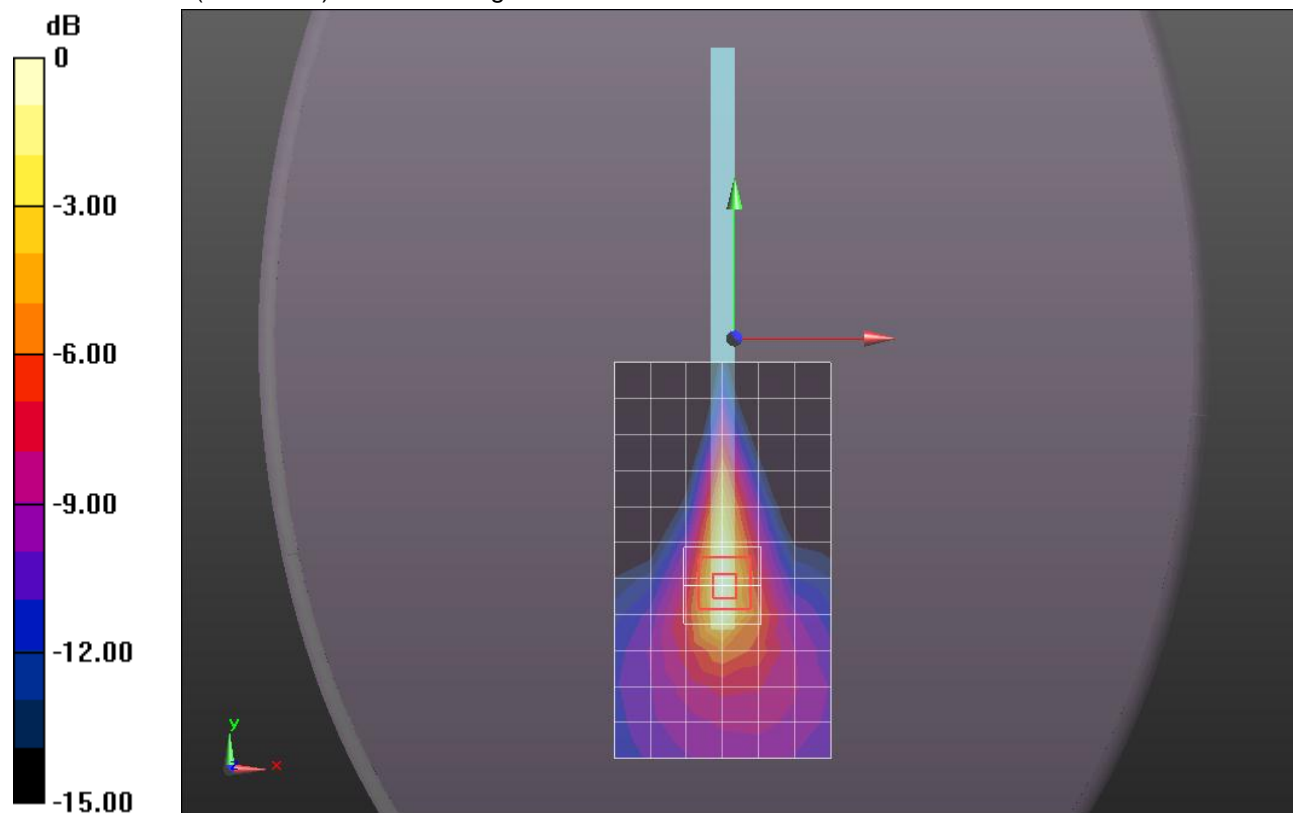

0 dB = 0.650mW/g = -3.74 dB mW/g