

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 825$ MHz; $\sigma = 1.006$ mho/m; $\epsilon_r = 53.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012

- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xRTT_RC3_SO32_ch 1013/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.192 mW/g


Rear/1xRTT_RC3_SO32_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.916 V/m; Power Drift = -0.0015 dB

Peak SAR (extrapolated) = 1.8870

SAR(1 g) = 0.946 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 1.371 mW/g

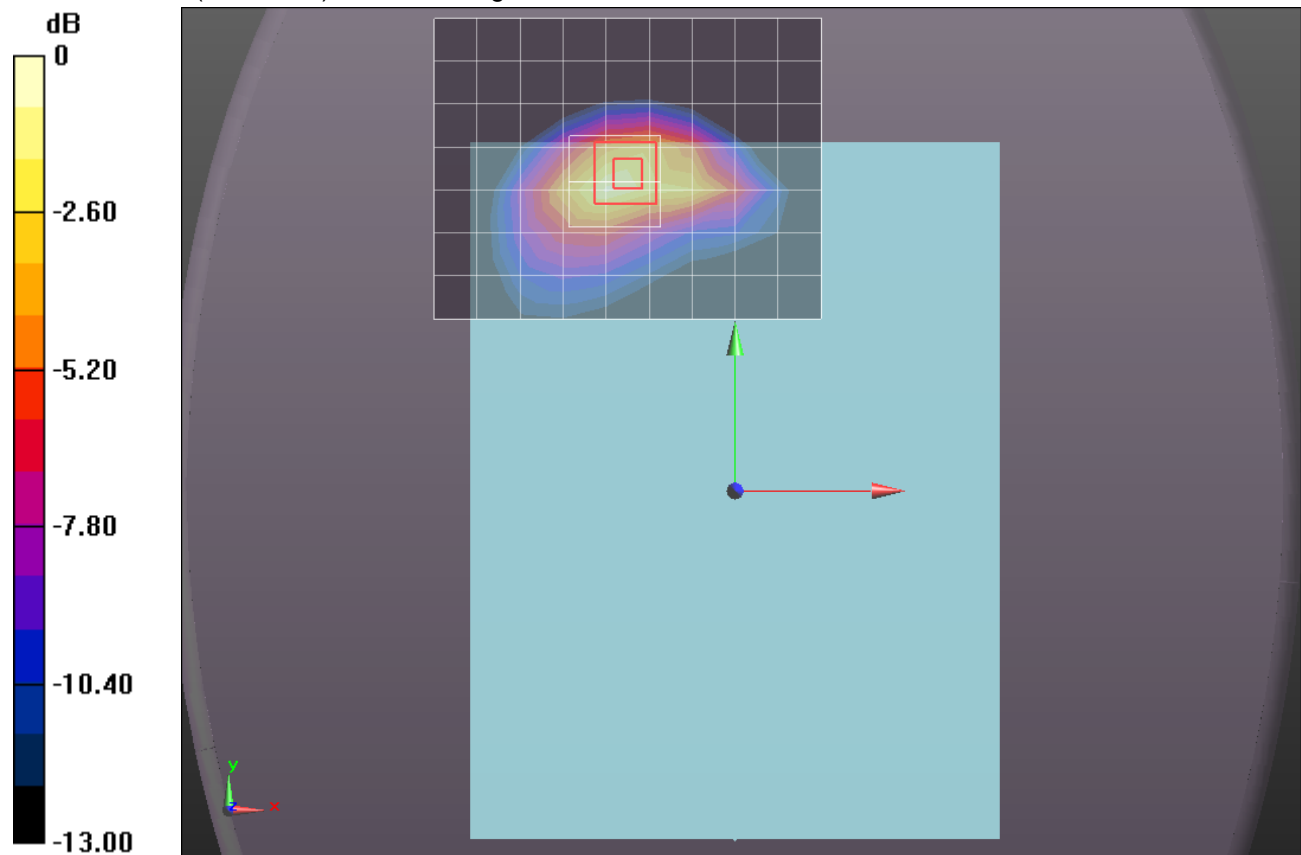

0 dB = 1.370mW/g = 2.73 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.017$ mho/m; $\epsilon_r = 53.113$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xRTT_RC3_SO32_ch 384/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.577 mW/g

Rear/1xRTT_RC3_SO32_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 40.872 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.3300

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.617 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.682 mW/g

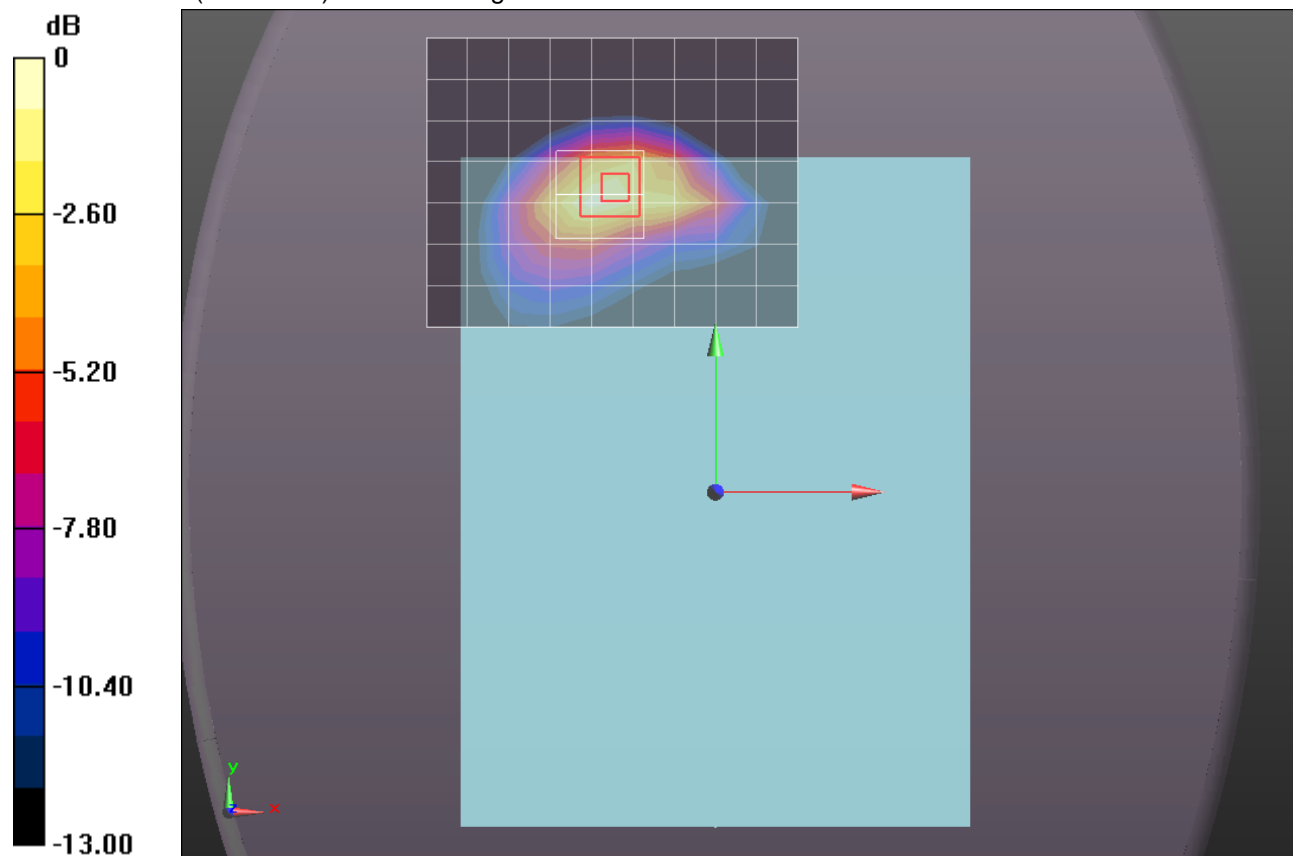

0 dB = 1.680mW/g = 4.51 dB mW/g


CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xRTT_RC3_SO32_ch 384/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.607 mW/g

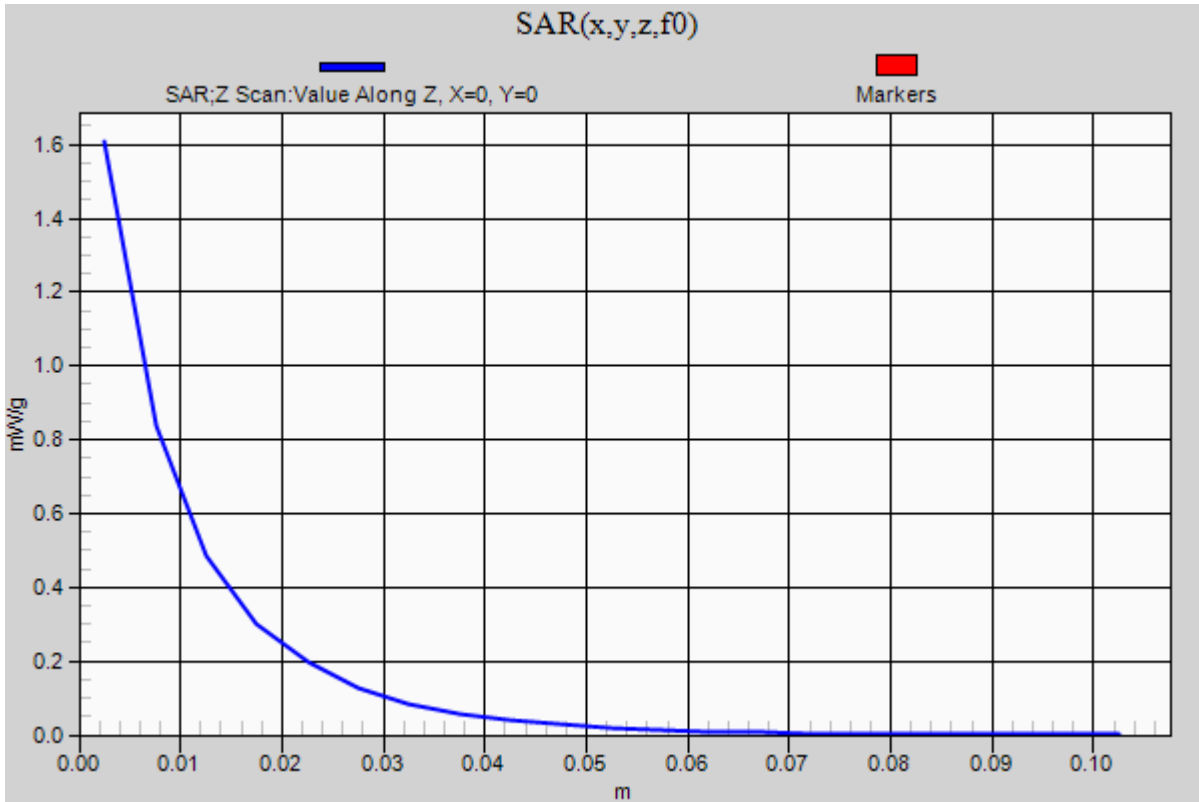

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.029$ mho/m; $\epsilon_r = 52.994$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xRTT_RC3_SO32_ch 777/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.327 mW/g

Rear/1xRTT_RC3_SO32_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.680 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.1230

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.560 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.554 mW/g

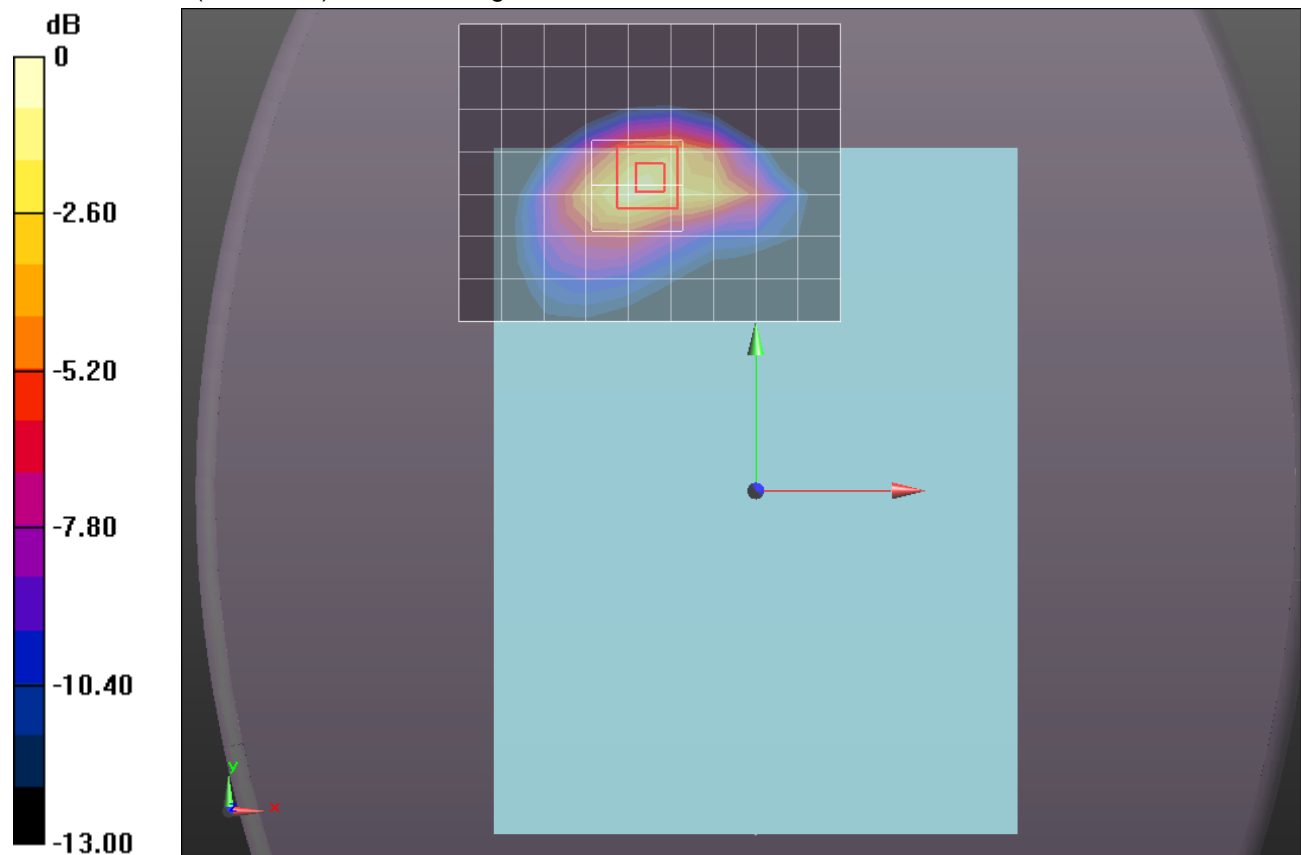

0 dB = 1.550mW/g = 3.81 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.001$ mho/m; $\epsilon_r = 53.229$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xRTT_RC3_SO32_ch 1013/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.960 mW/g


Edge 1/1xRTT_RC3_SO32_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.117 V/m; Power Drift = -0.0056 dB

Peak SAR (extrapolated) = 1.2440

SAR(1 g) = 0.657 mW/g; SAR(10 g) = 0.373 mW/g

Maximum value of SAR (measured) = 0.964 mW/g

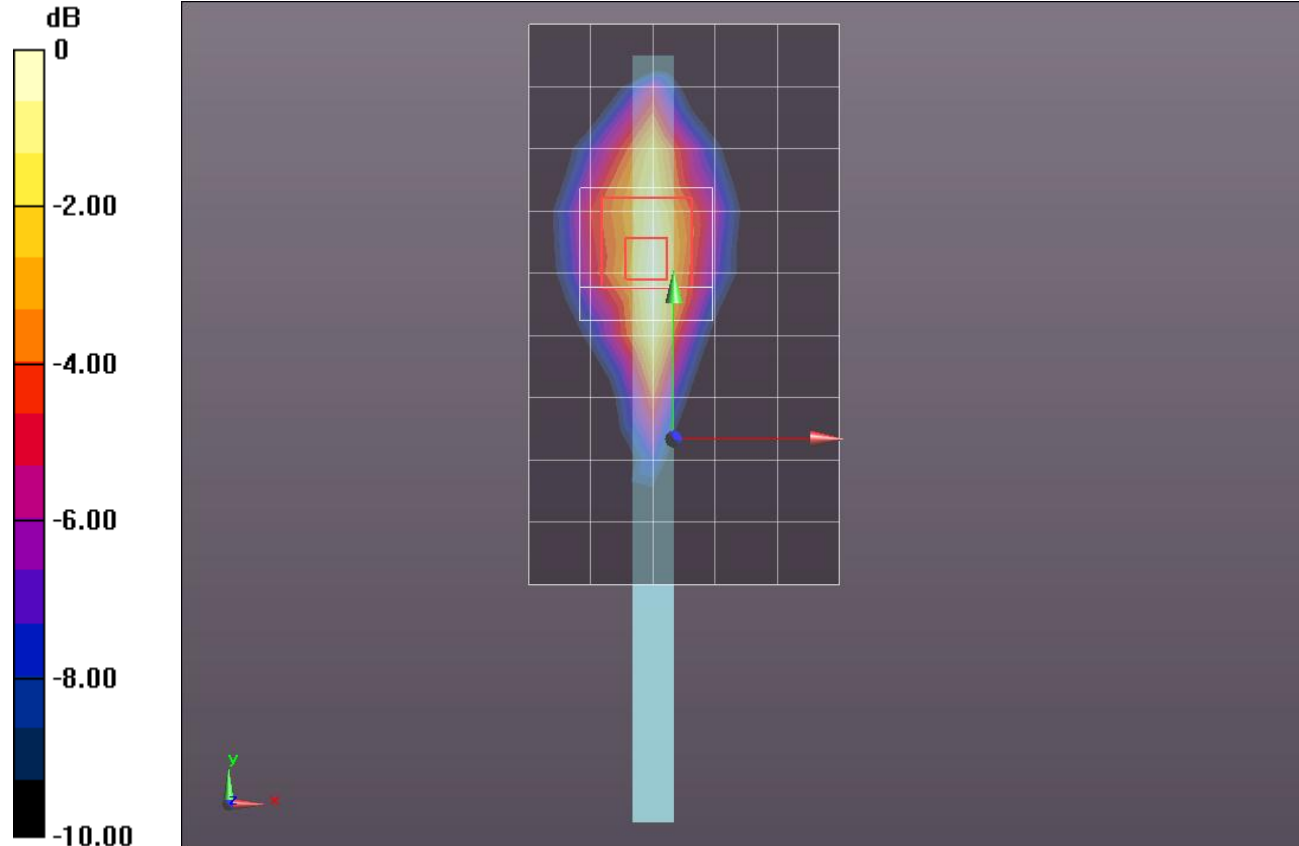

0 dB = 0.960mW/g = -0.35 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 53.11$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xRTT_RC3_SO32_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.221 mW/g

Edge 1/1xRTT_RC3_SO32_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.365 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.5620

SAR(1 g) = 0.819 mW/g; SAR(10 g) = 0.460 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.210 mW/g

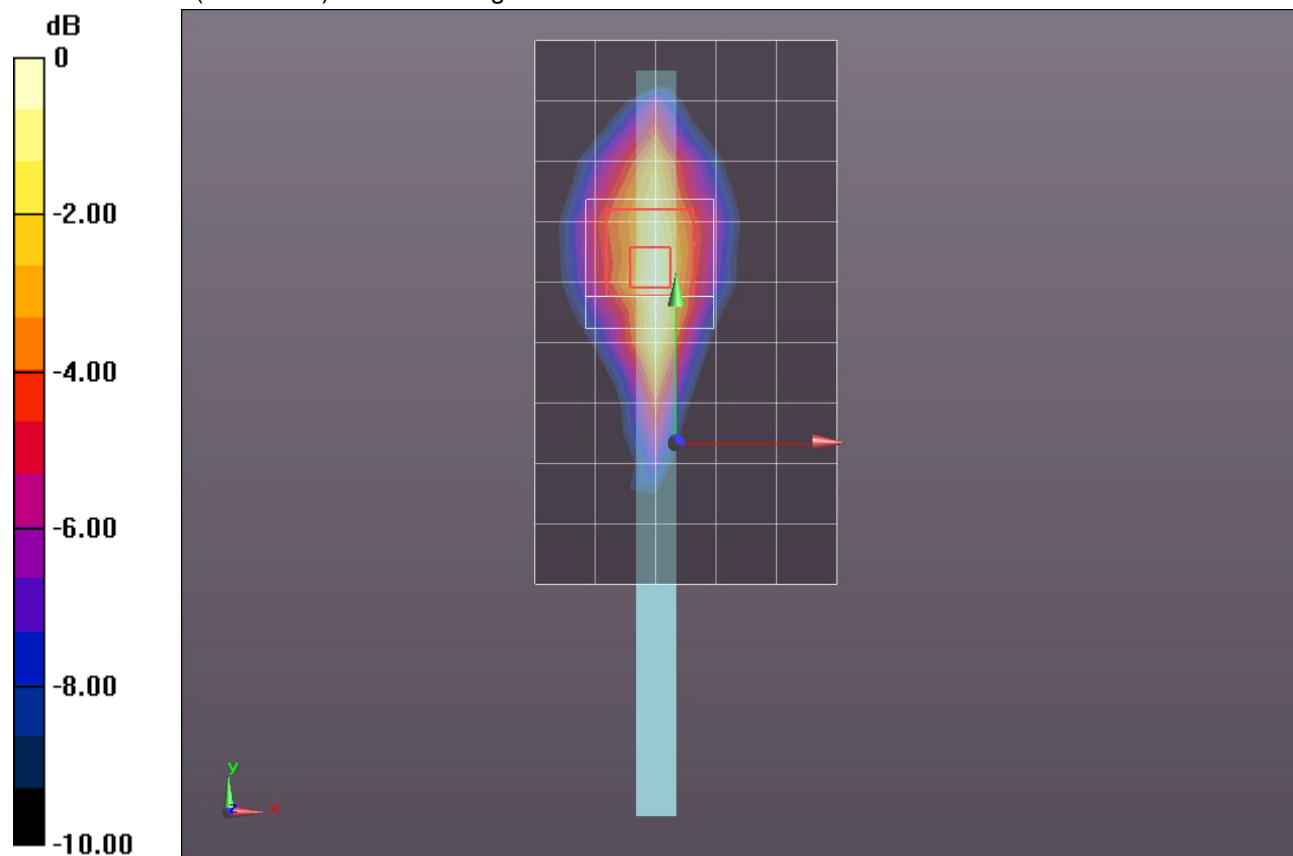

0 dB = 1.210mW/g = 1.66 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.024$ mho/m; $\epsilon_r = 52.998$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xRTT_RC3_SO32_ch 777/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.949 mW/g

Edge 1/1xRTT_RC3_SO32_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 29.458 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.2320

SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.341 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.939 mW/g

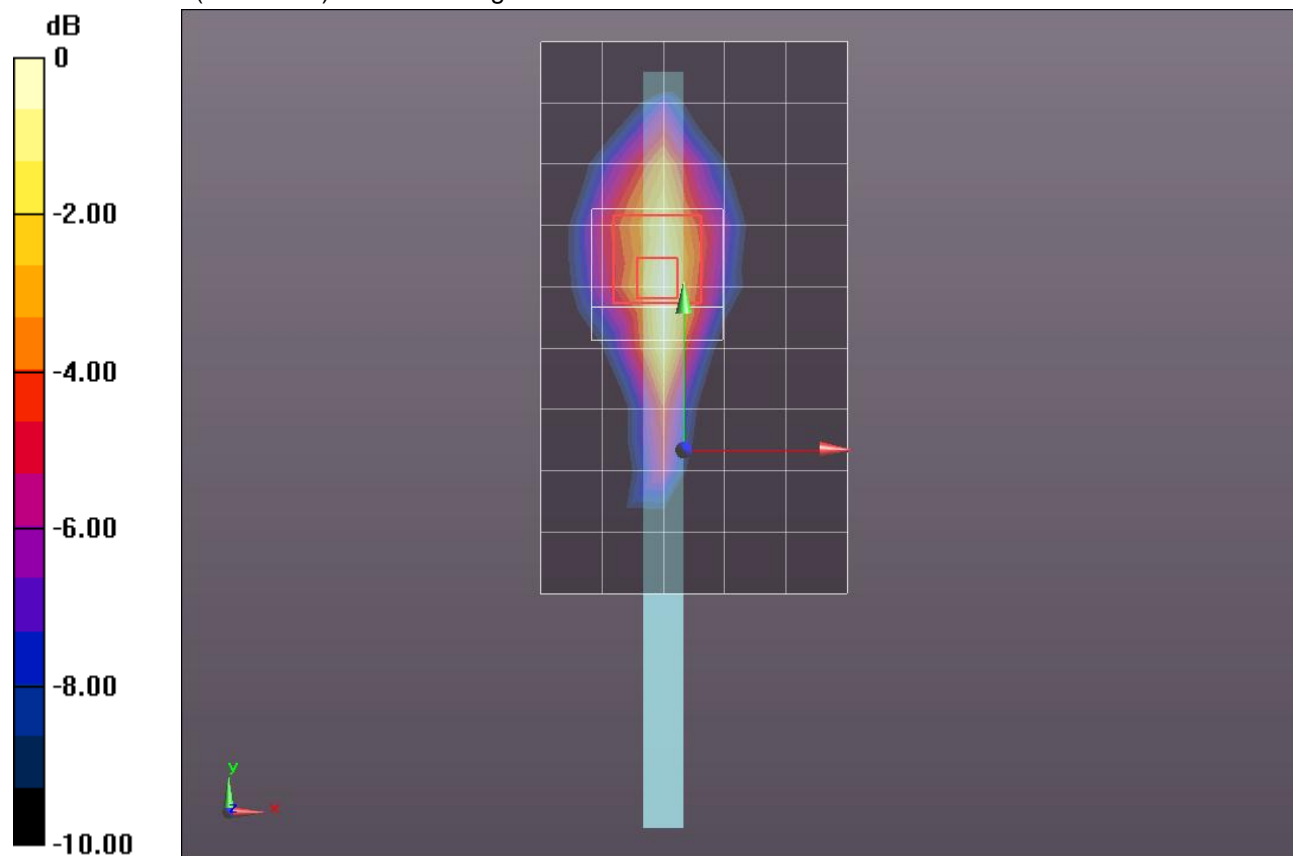

0 dB = 0.940mW/g = -0.54 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.001$ mho/m; $\epsilon_r = 53.229$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xRTT_RC3_SO32_ch 1013/Area Scan (6x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.224 mW/g

41 deg Tilt @ Edge 1/1xRTT_RC3_SO32_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 33.597 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.6820

SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.422 mW/g

Maximum value of SAR (measured) = 1.276 mW/g

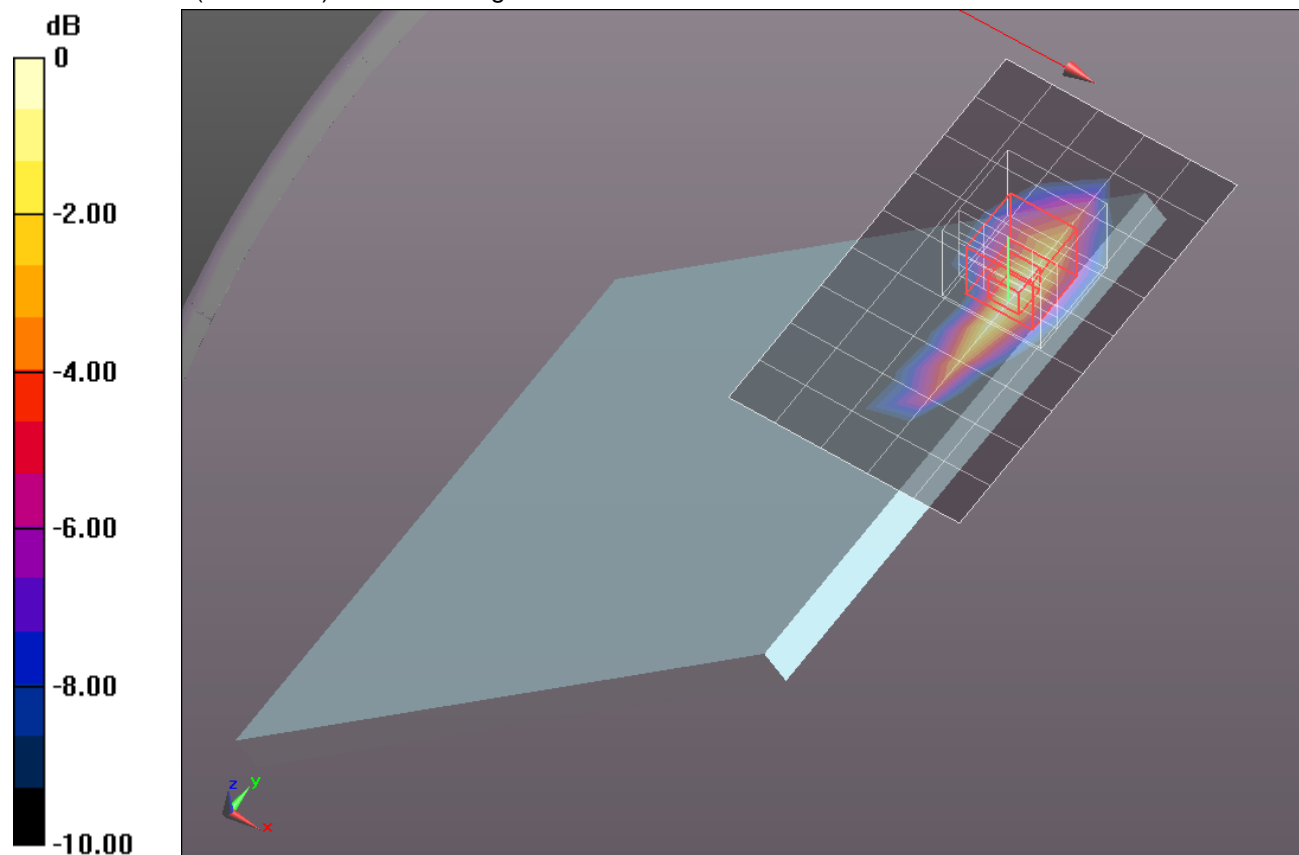

0 dB = 1.280mW/g = 2.14 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 53.11$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xRTT_RC3_SO32_ch 384/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.567 mW/g

41 deg Tilt @ Edge 1/1xRTT_RC3_SO32_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.959 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.1610

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.537 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.639 mW/g

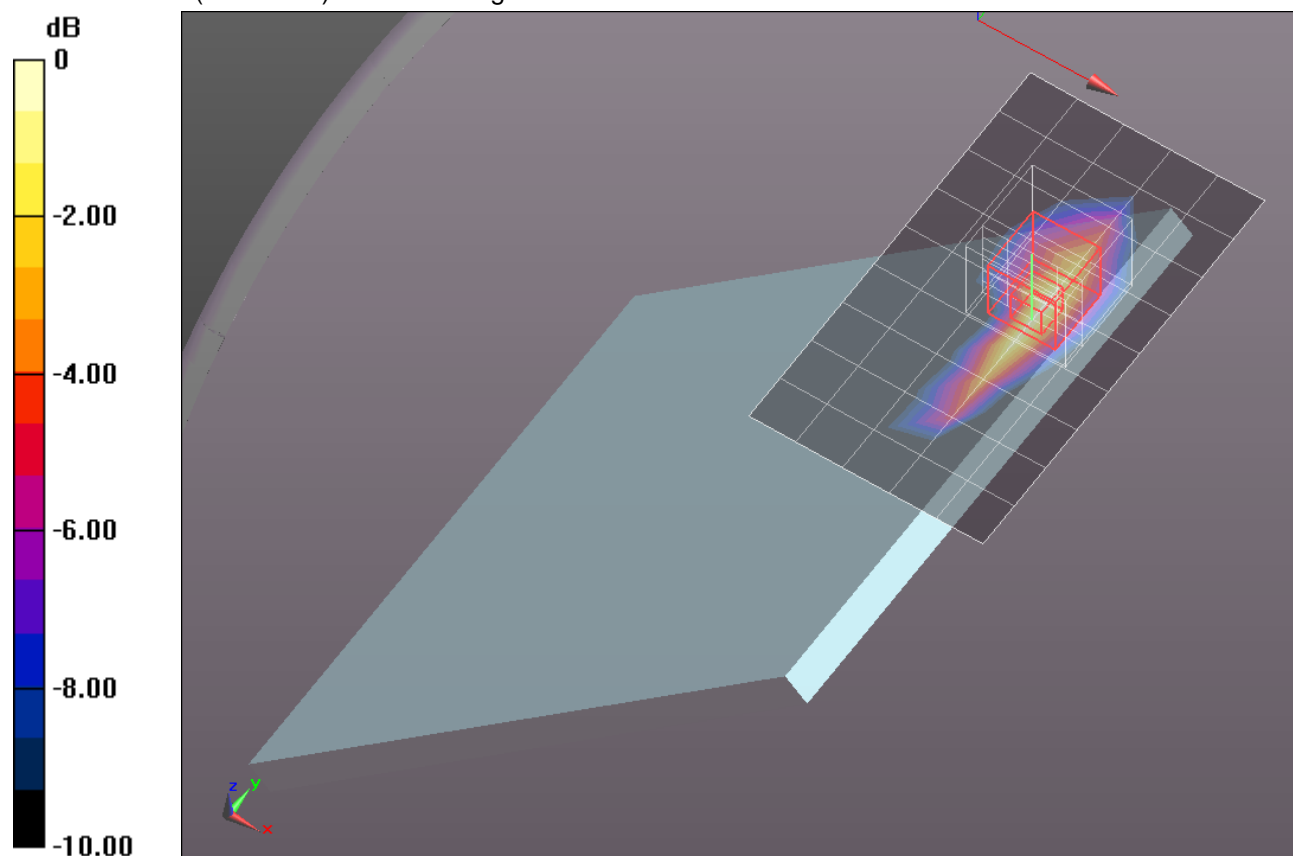

0 dB = 1.640mW/g = 4.30 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.024$ mho/m; $\epsilon_r = 52.998$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xRTT_RC3_SO32_ch 777/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.448 mW/g

41 deg Tilt @ Edge 1/1xRTT_RC3_SO32_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 36.037 V/m; Power Drift = -0.0083 dB

Peak SAR (extrapolated) = 1.9720

SAR(1 g) = 0.973 mW/g; SAR(10 g) = 0.495 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.508 mW/g

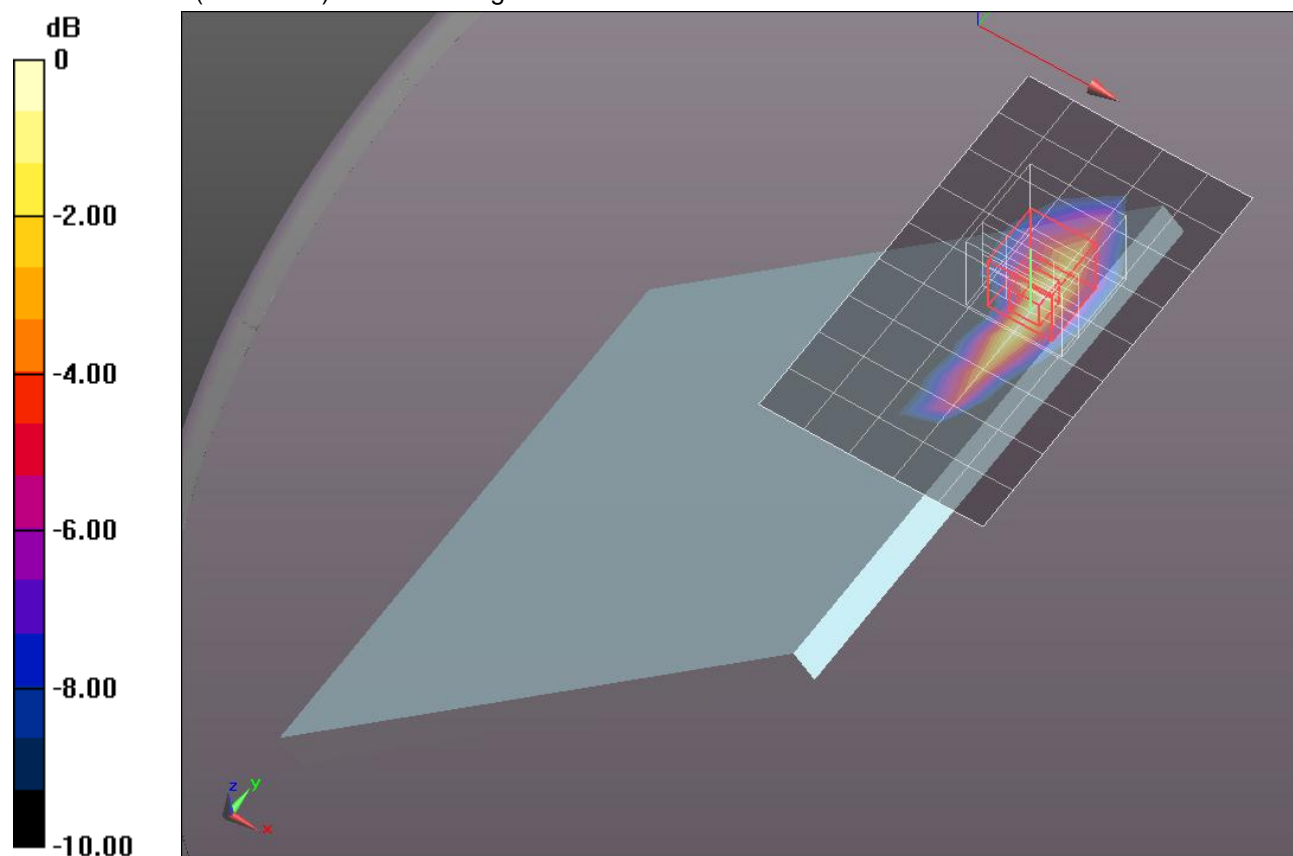

0 dB = 1.510mW/g = 3.58 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 825$ MHz; $\sigma = 1.001$ mho/m; $\epsilon_r = 53.229$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear with 12mm/1xRTT_RC3_SO32_ch 1013/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.704 mW/g


Rear with 12mm/1xRTT_RC3_SO32_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.424 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.9560

SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.410 mW/g

Maximum value of SAR (measured) = 0.807 mW/g

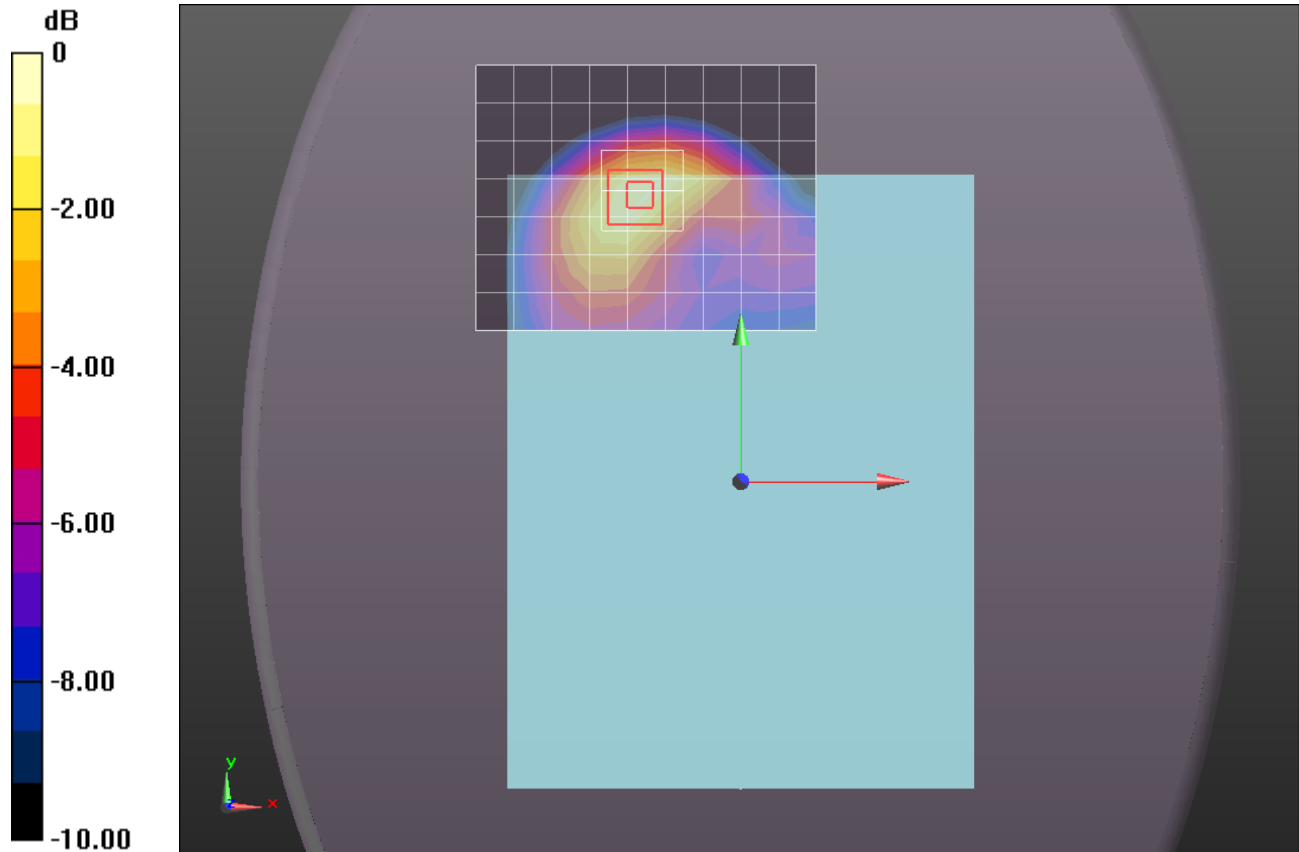

0 dB = 0.810mW/g = -1.83 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 53.11$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear with 12mm/1xRTT_RC3_SO32_ch 384/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.914 mW/g

Rear with 12mm/1xRTT_RC3_SO32_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.698 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.2410

SAR(1 g) = 0.809 mW/g; SAR(10 g) = 0.518 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.037 mW/g

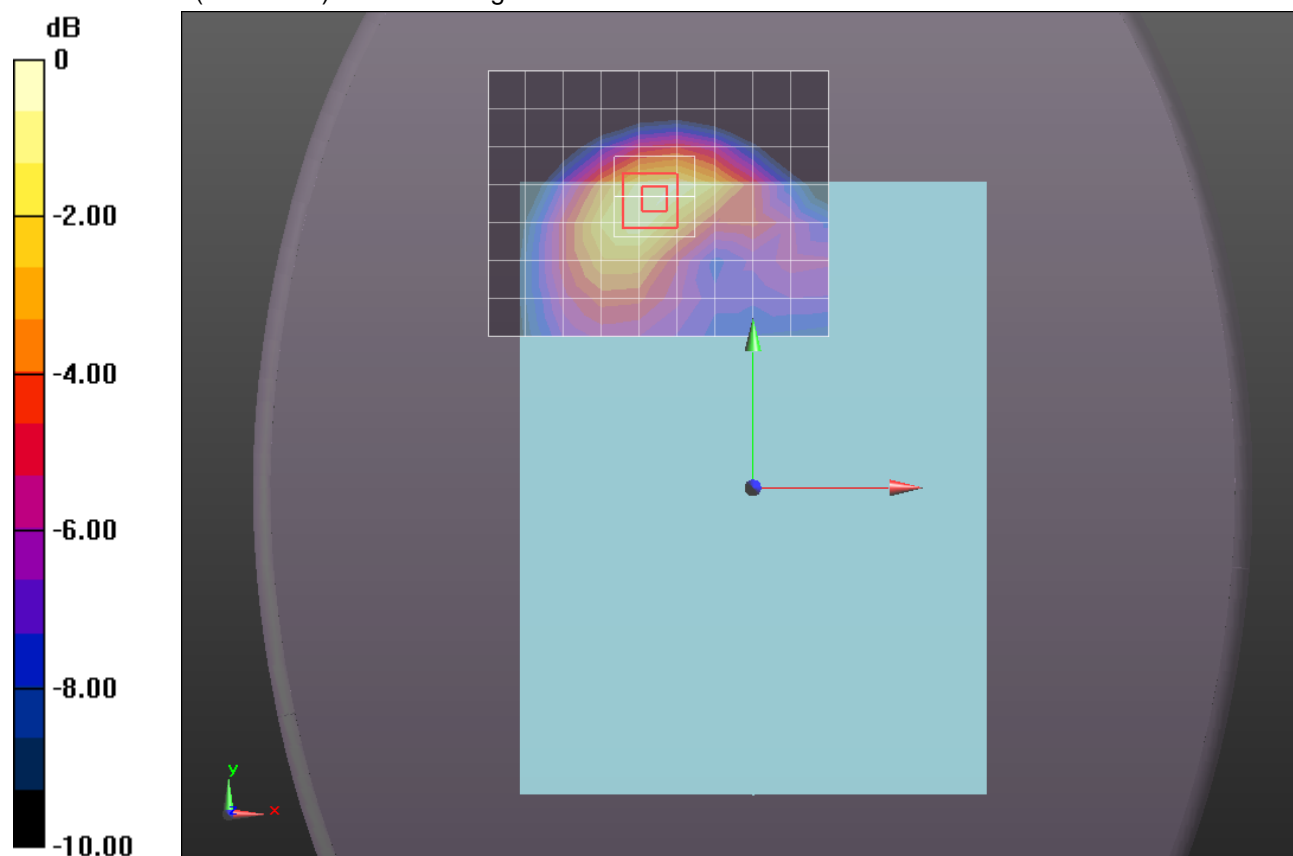

0 dB = 1.040mW/g = 0.34 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.024$ mho/m; $\epsilon_r = 52.998$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear with 12mm/1xRTT_RC3_SO32_ch 777/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.759 mW/g

Rear with 12mm/1xRTT_RC3_SO32_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.909 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.0380

SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.432 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.872 mW/g

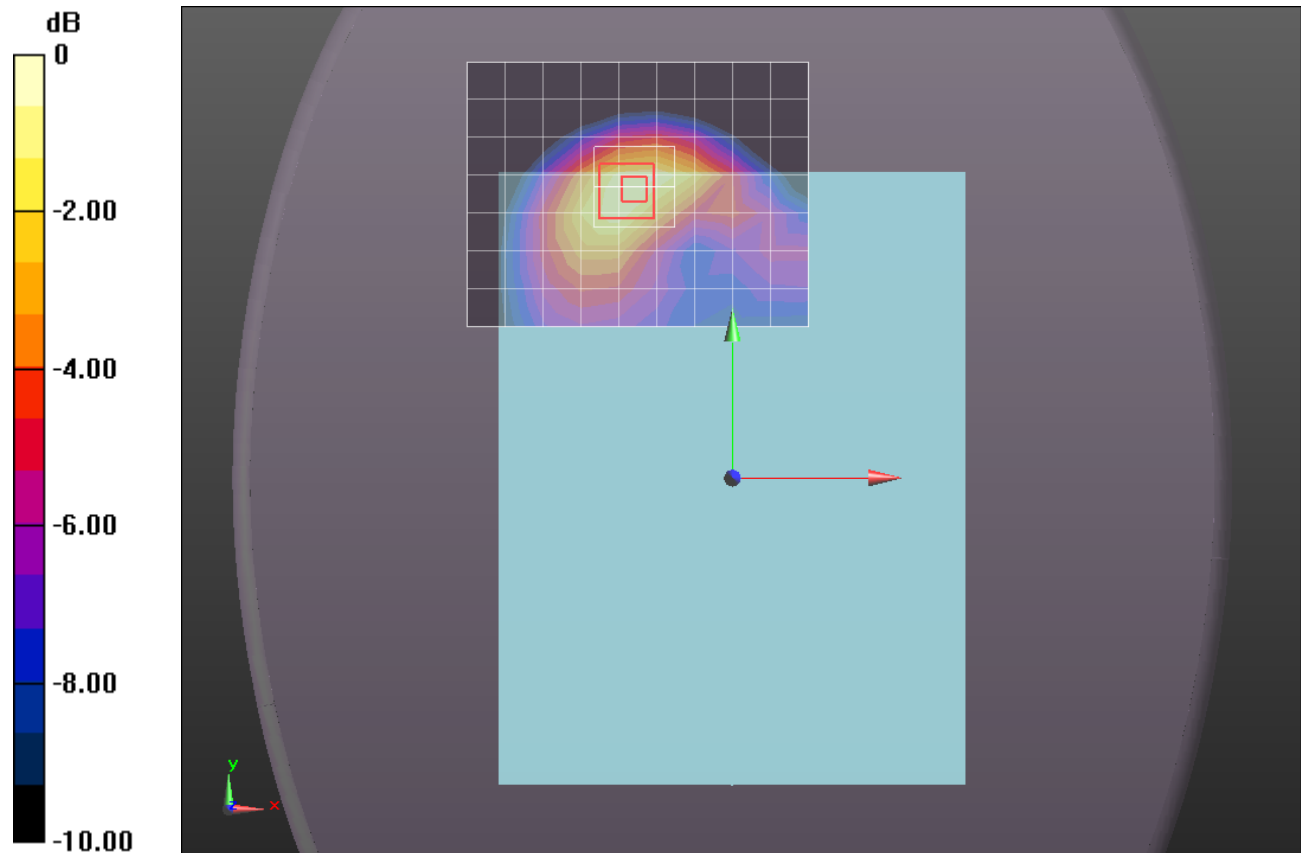

0 dB = 0.870mW/g = -1.21 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 53.11$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1 with 14mm/1xRTT_RC3_SO32_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.667 mW/g

Edge 1 with 14mm/1xRTT_RC3_SO32_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.652 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.7850

SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.356 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.673 mW/g

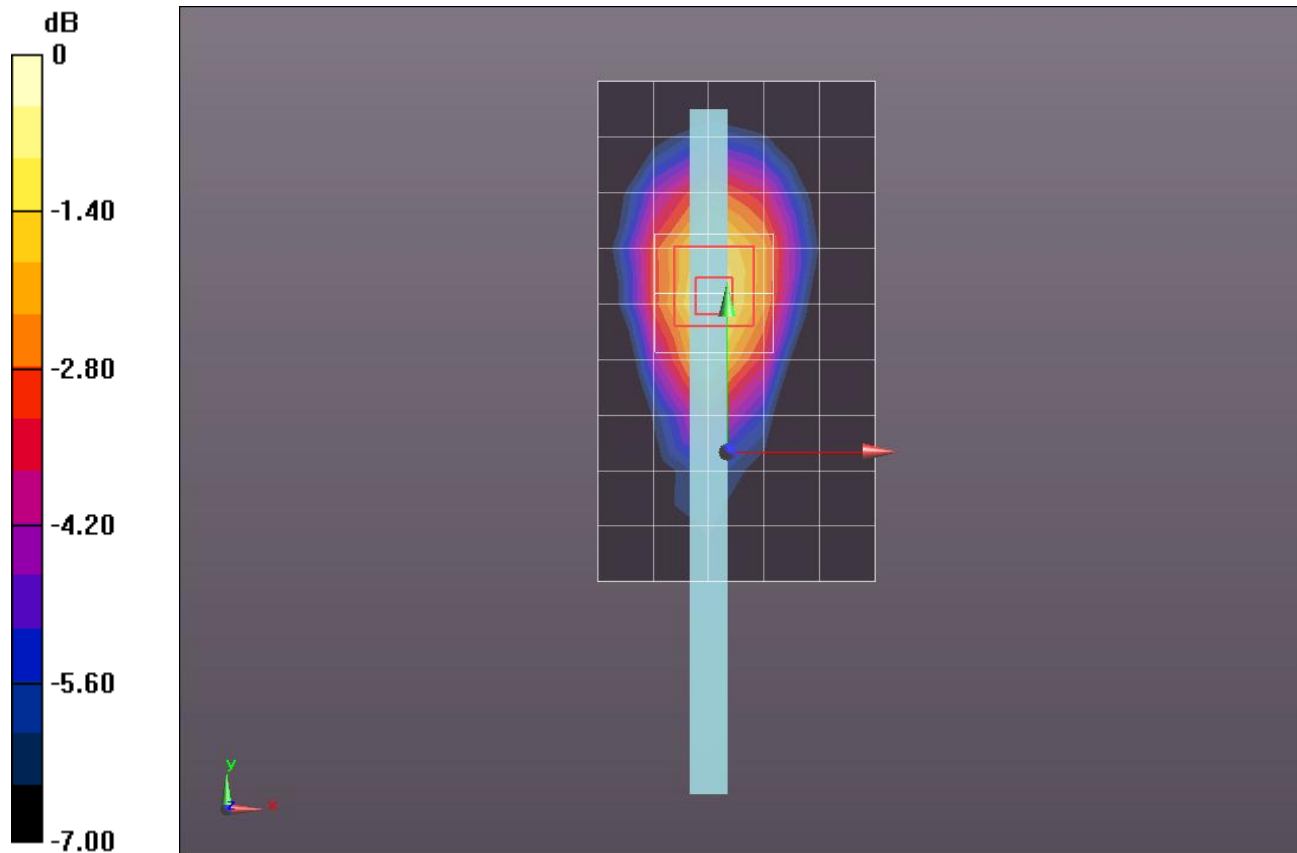

0 dB = 0.670mW/g = -3.48 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 53.11$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

27 deg Right Tilt @ Edge 1/1xRTT_RC3_SO32_ch 384/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.532 mW/g

27 deg Right Tilt @ Edge 1/1xRTT_RC3_SO32_ch 384/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.597 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.1380

SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.330 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.869 mW/g

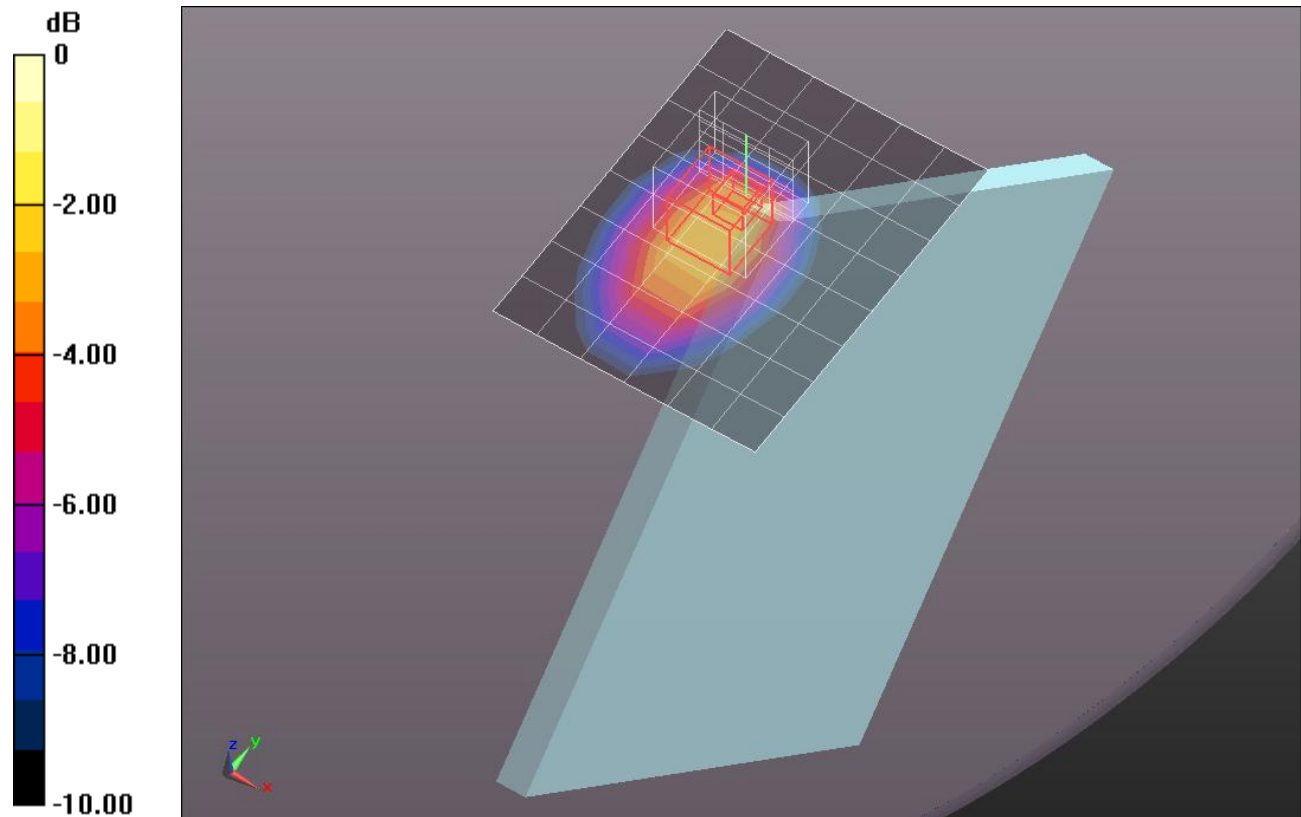

0 dB = 0.870mW/g = -1.21 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 53.11$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 2/1xRTT_RC3_SO32_ch 384/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.505 mW/g

Edge 2/1xRTT_RC3_SO32_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.951 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.1140

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.270 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.815 mW/g

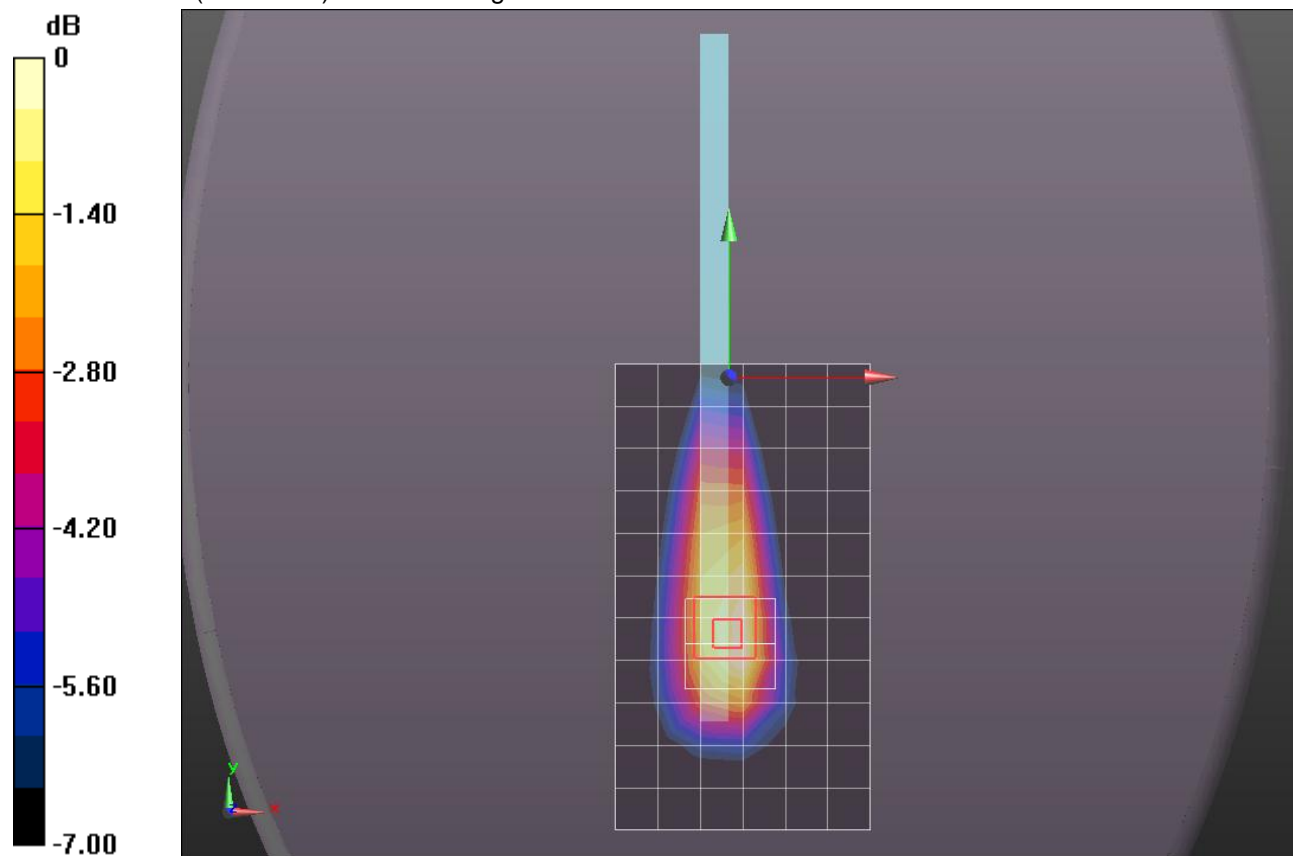

0 dB = 0.500mW/g = -6.02 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.001$ mho/m; $\epsilon_r = 53.026$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rel.0_ch 1013/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.995 mW/g


Rear/1xEVDO_Rel.0_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.581 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 1.7910

SAR(1 g) = 0.907 mW/g; SAR(10 g) = 0.479 mW/g

Maximum value of SAR (measured) = 1.318 mW/g

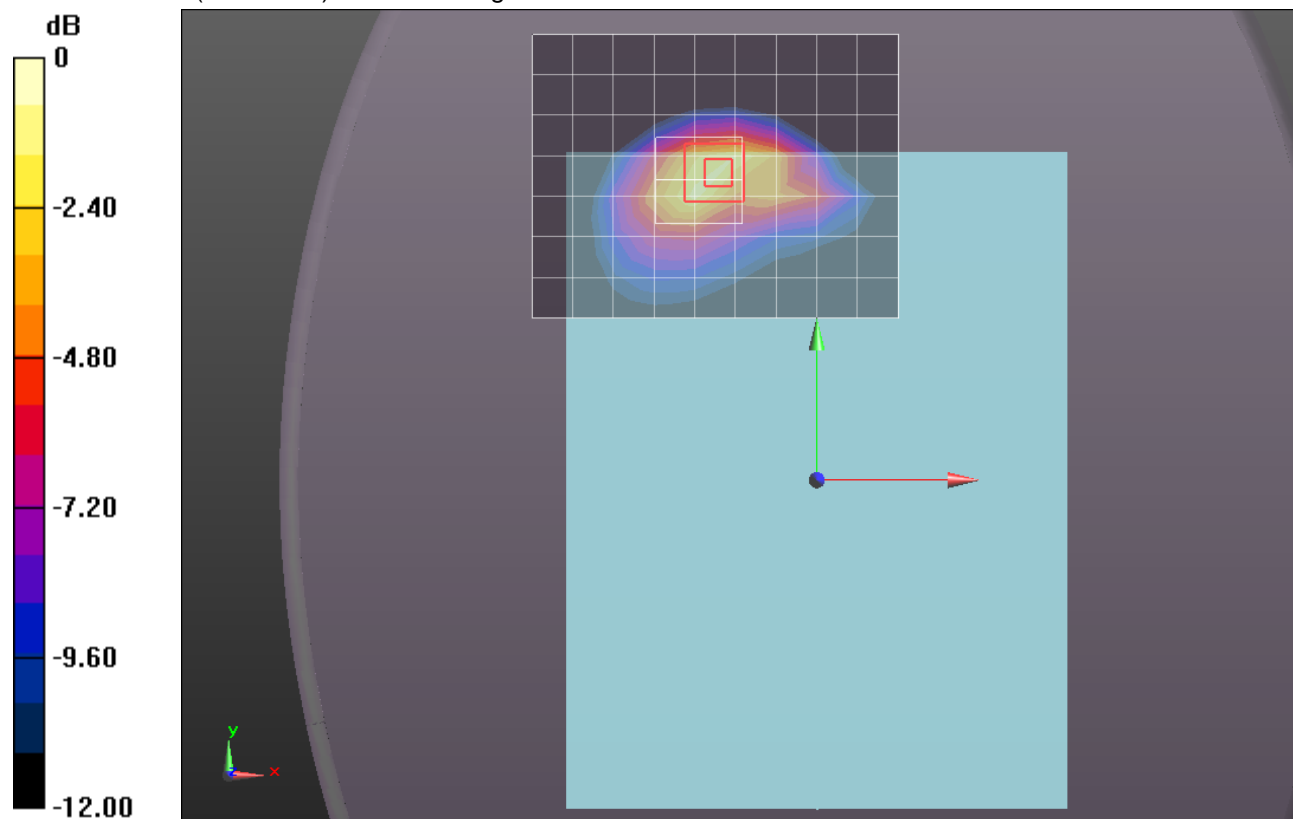

0 dB = 1.320mW/g = 2.41 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 52.902$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rel.0_ch 384/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.465 mW/g

Rear/1xEVDO_Rel.0_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 38.291 V/m; Power Drift = 0.0051 dB

Peak SAR (extrapolated) = 2.2320

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.607 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.545 mW/g

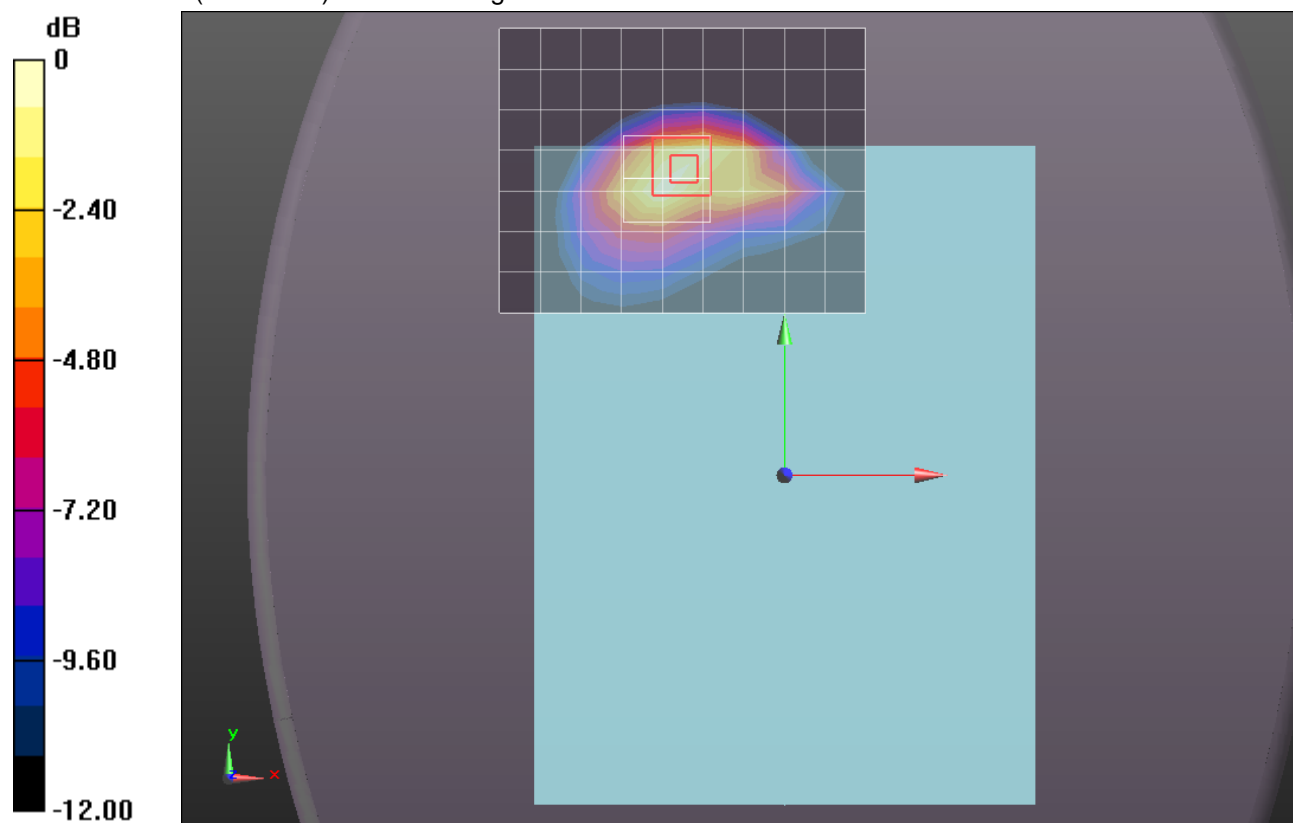

0 dB = 1.540mW/g = 3.75 dB mW/g


CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEVDO_Rel.0_ch 384/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.446 mW/g

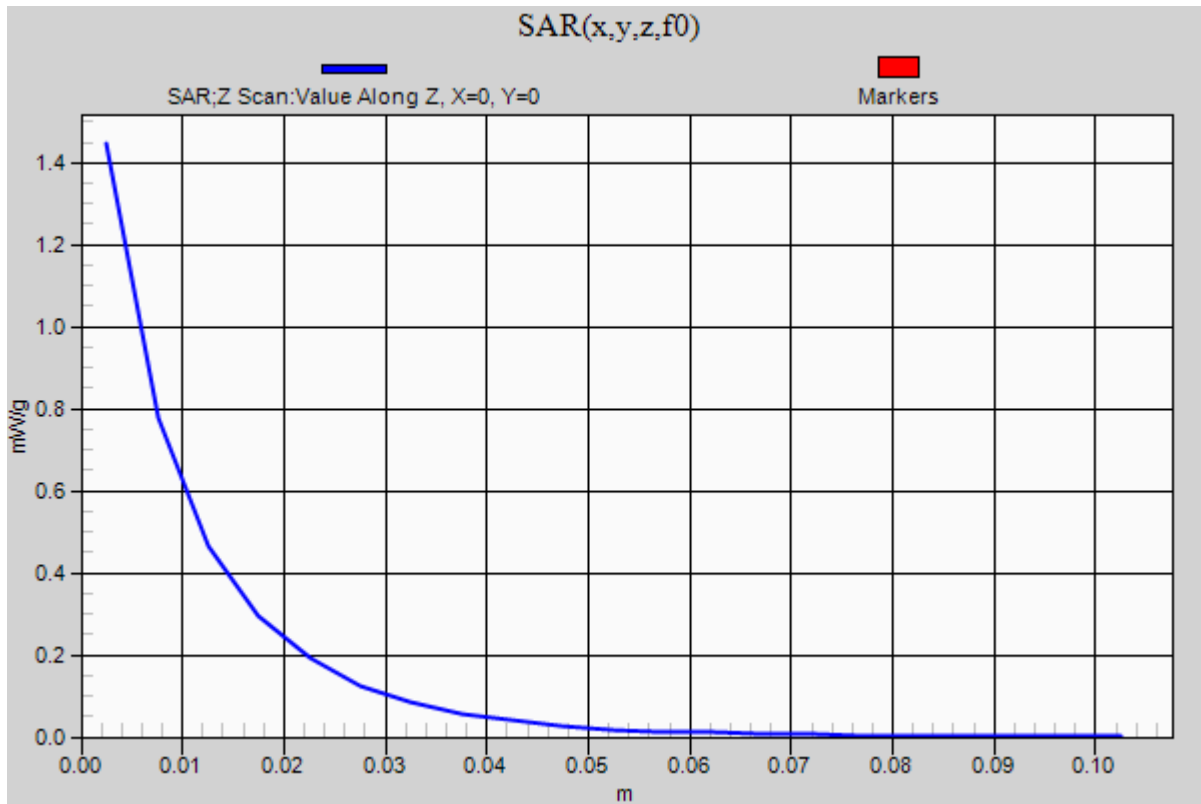

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.024$ mho/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rel.0_ch 777/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.144 mW/g

Rear/1xEVDO_Rel.0_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 36.763 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.0200

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.539 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.566 mW/g

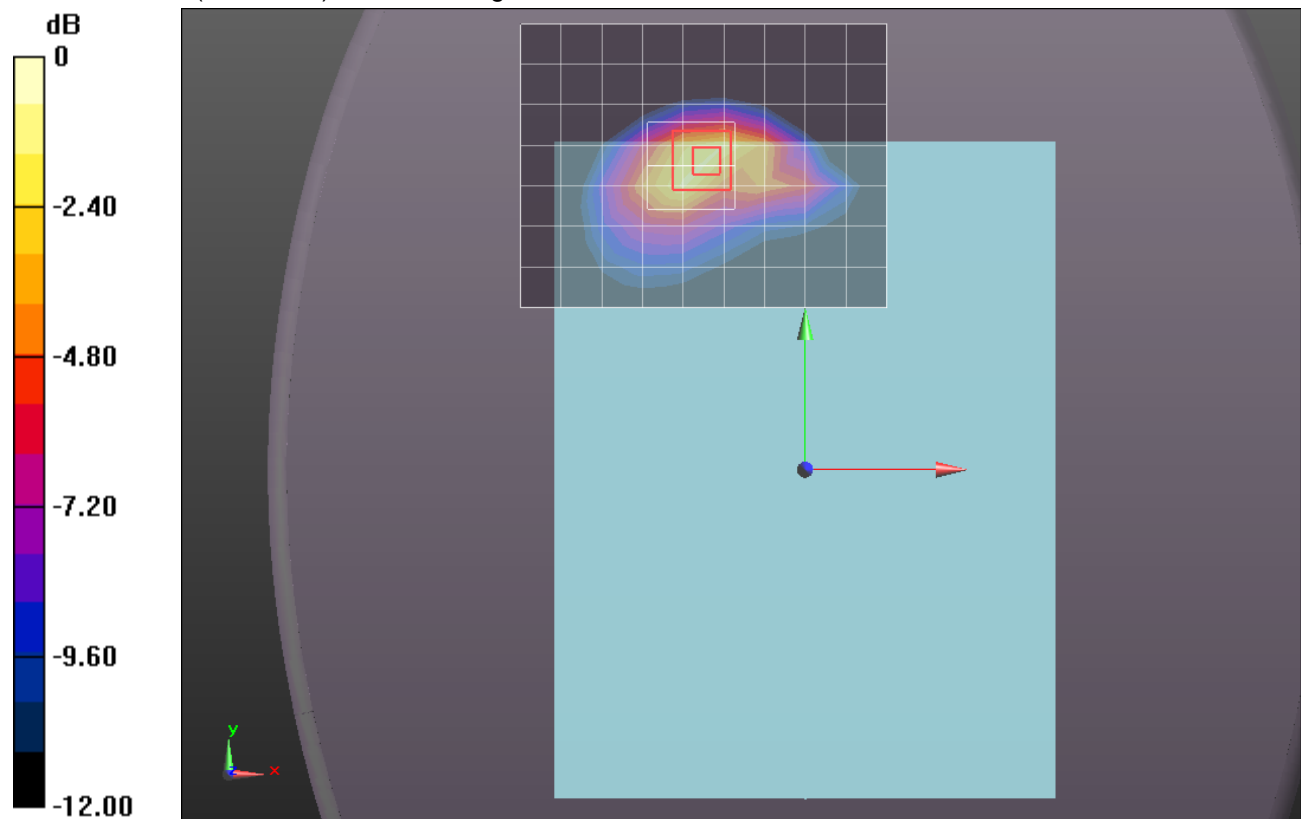

0 dB = 1.570mW/g = 3.92 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.001$ mho/m; $\epsilon_r = 53.026$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rel.0_ch 1013/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.138 mW/g


Edge 1/1xEVDO_Rel.0_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.108 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.2880

SAR(1 g) = 0.692 mW/g; SAR(10 g) = 0.395 mW/g

Maximum value of SAR (measured) = 1.023 mW/g

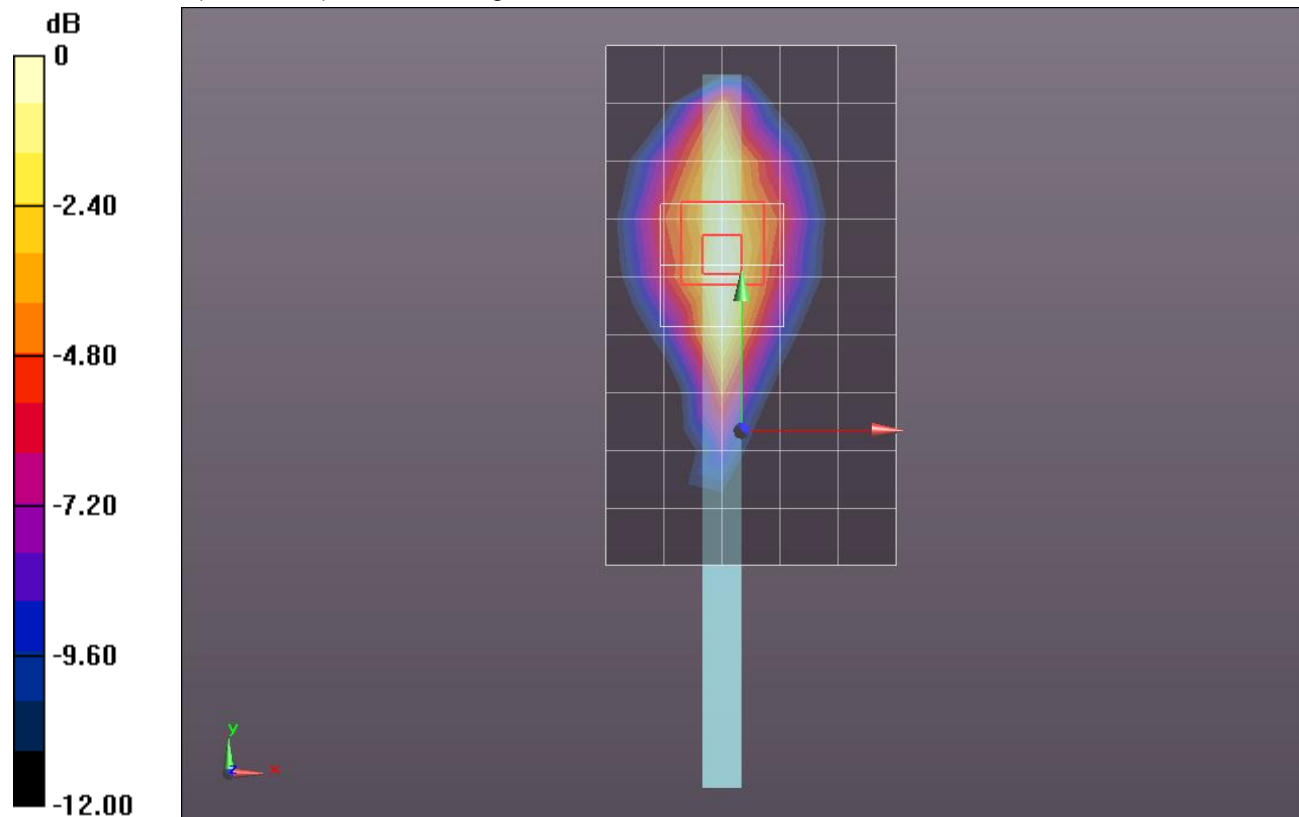

0 dB = 1.020mW/g = 0.17 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 52.902$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012

- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rel.0_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.451 mW/g

Edge 1/1xEVDO_Rel.0_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 34.751 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.6290

SAR(1 g) = 0.869 mW/g; SAR(10 g) = 0.492 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.292 mW/g

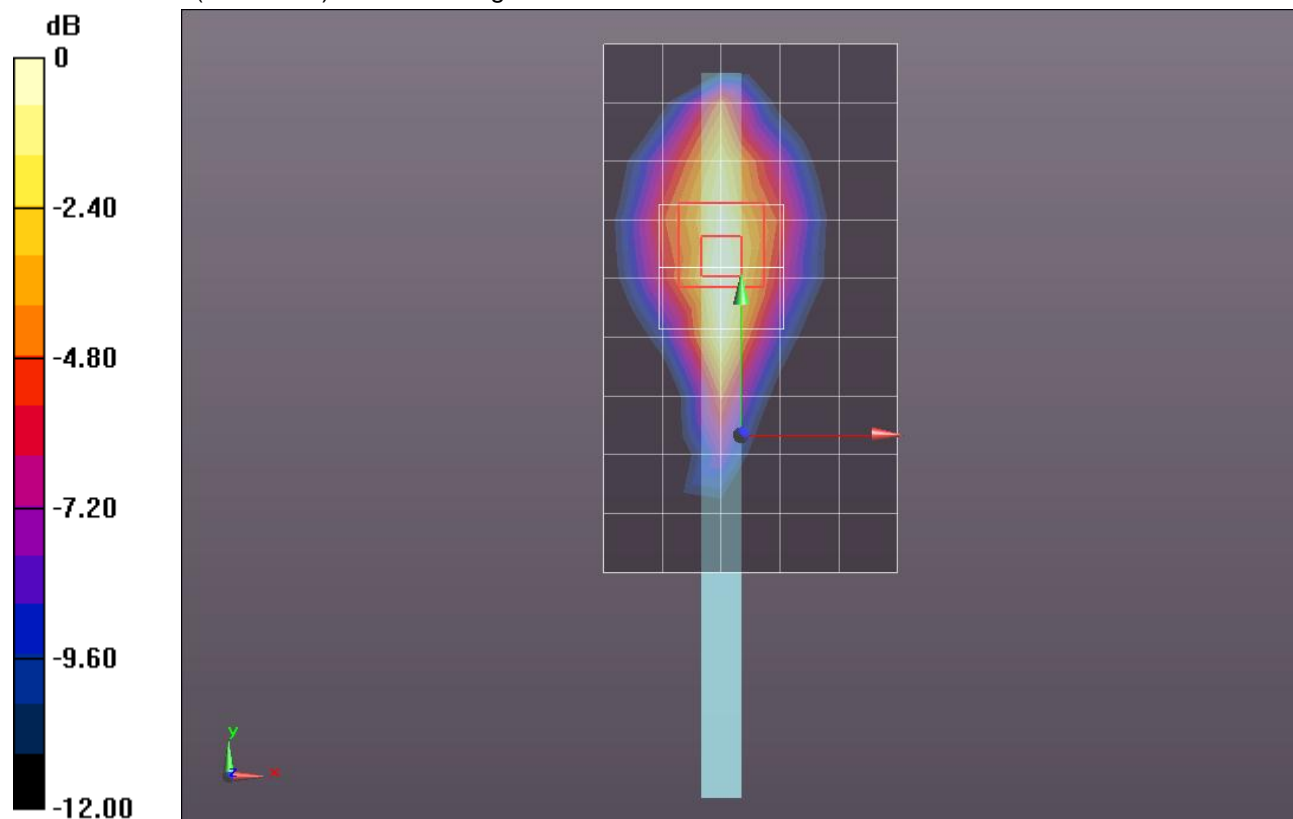

0 dB = 1.290mW/g = 2.21 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.024$ mho/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rel.0_ch 777/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.095 mW/g

Edge 1/1xEVDO_Rel.0_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.313 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.2610

SAR(1 g) = 0.649 mW/g; SAR(10 g) = 0.359 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.978 mW/g

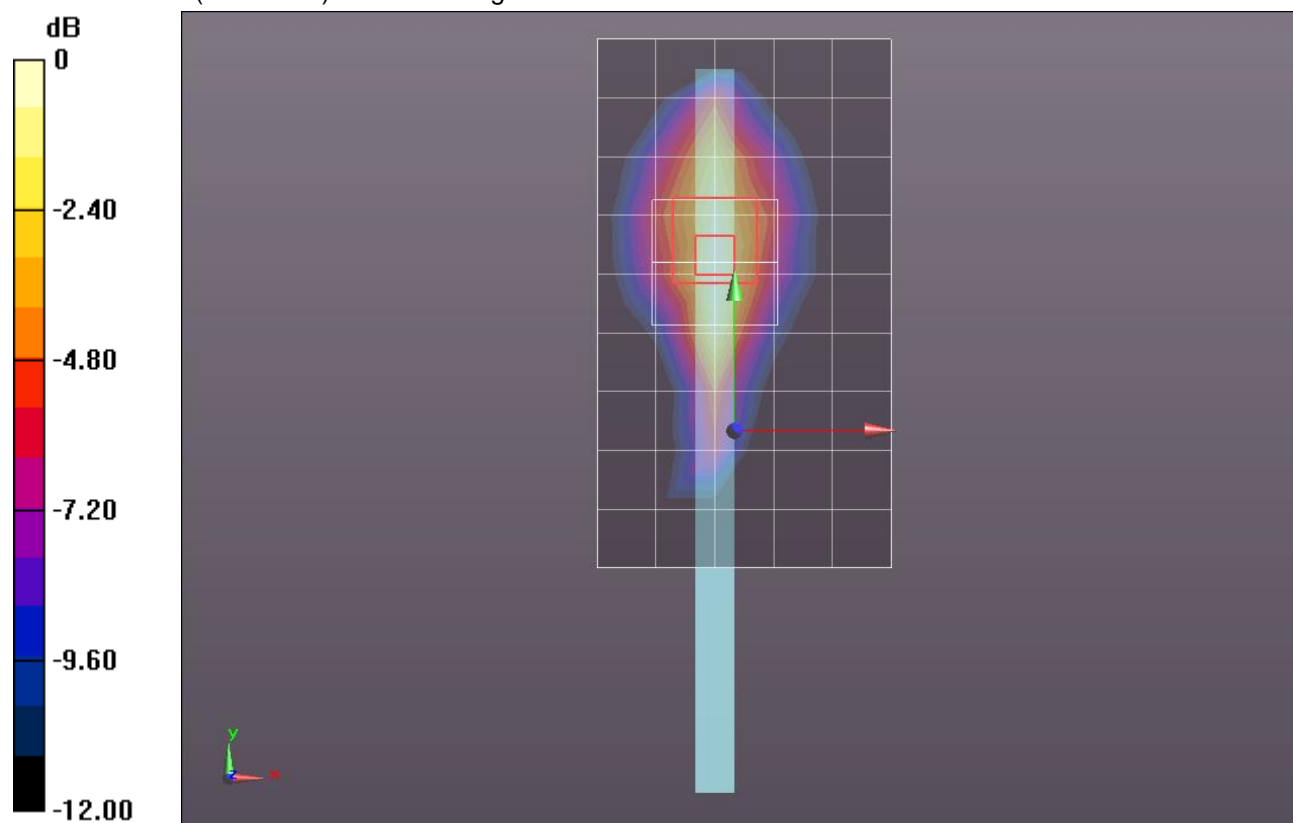

0 dB = 0.980mW/g = -0.18 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.001$ mho/m; $\epsilon_r = 53.026$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xEVDO_Rel.0_ch 1013/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.355 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rel.0_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.467 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.6870

SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.417 mW/g

Maximum value of SAR (measured) = 1.245 mW/g

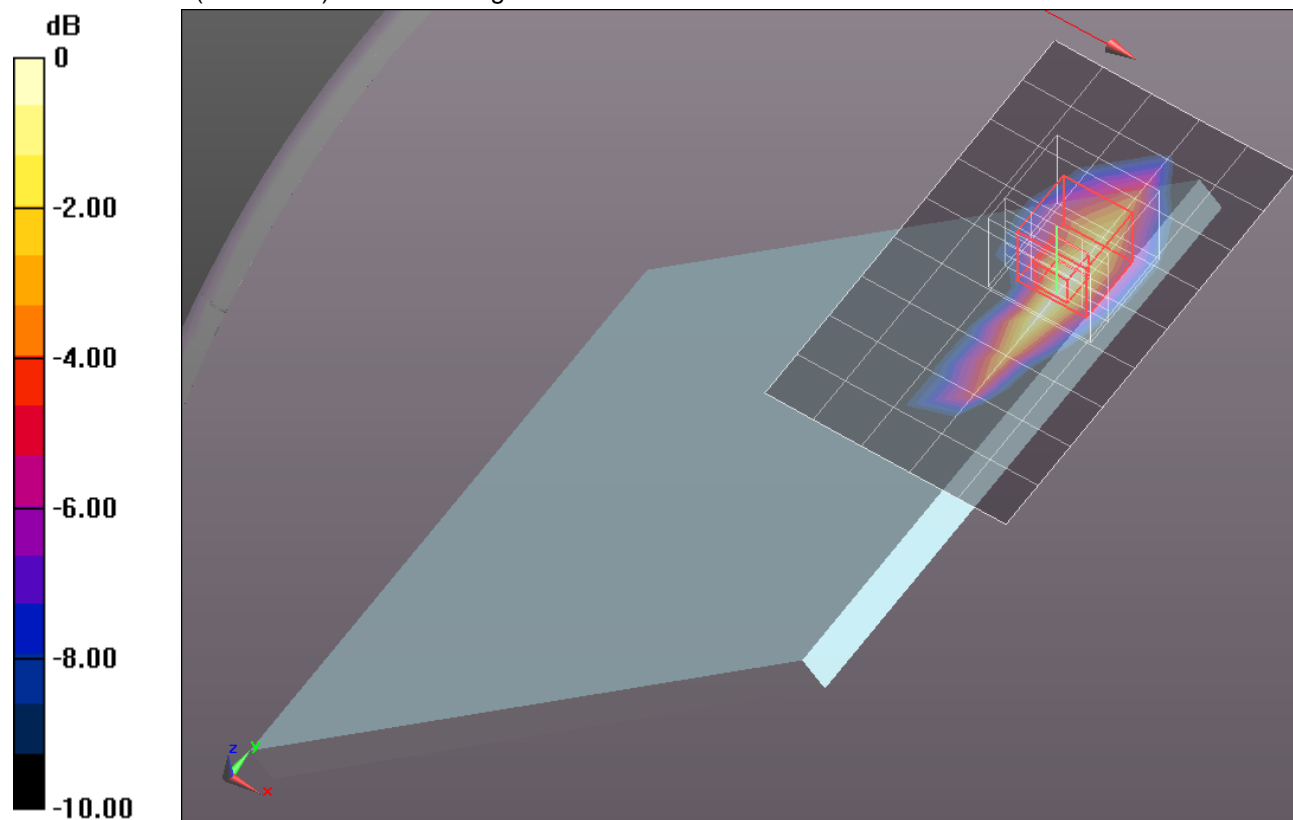

0 dB = 1.250mW/g = 1.94 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 52.902$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xEVDO_Rel.0_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.750 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rel.0_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.831 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.1660

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.536 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.595 mW/g

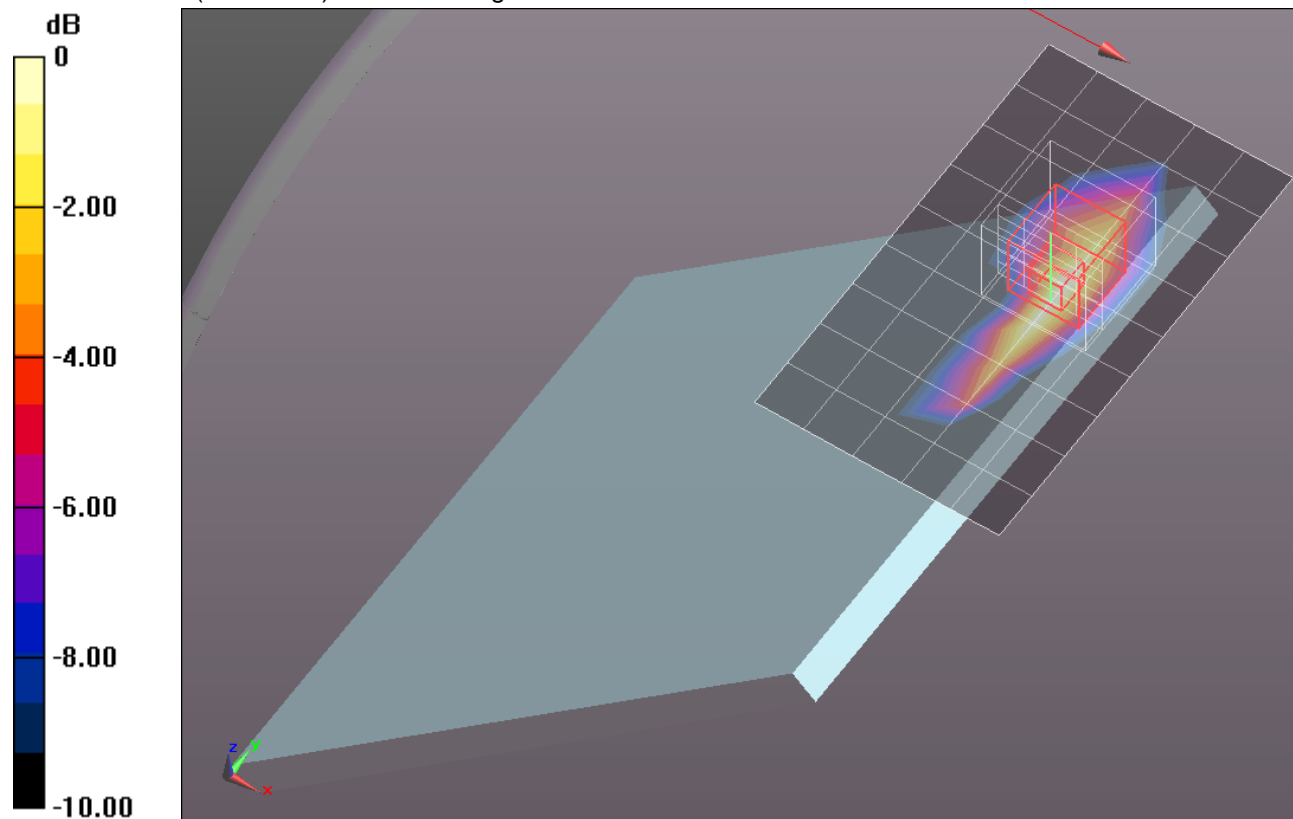

0 dB = 1.590mW/g = 4.03 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.024$ mho/m; $\epsilon_r = 52.79$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xEVDO_Rel.0_ch 777/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.592 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rel.0_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 36.042 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.0220

SAR(1 g) = 0.972 mW/g; SAR(10 g) = 0.493 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.492 mW/g

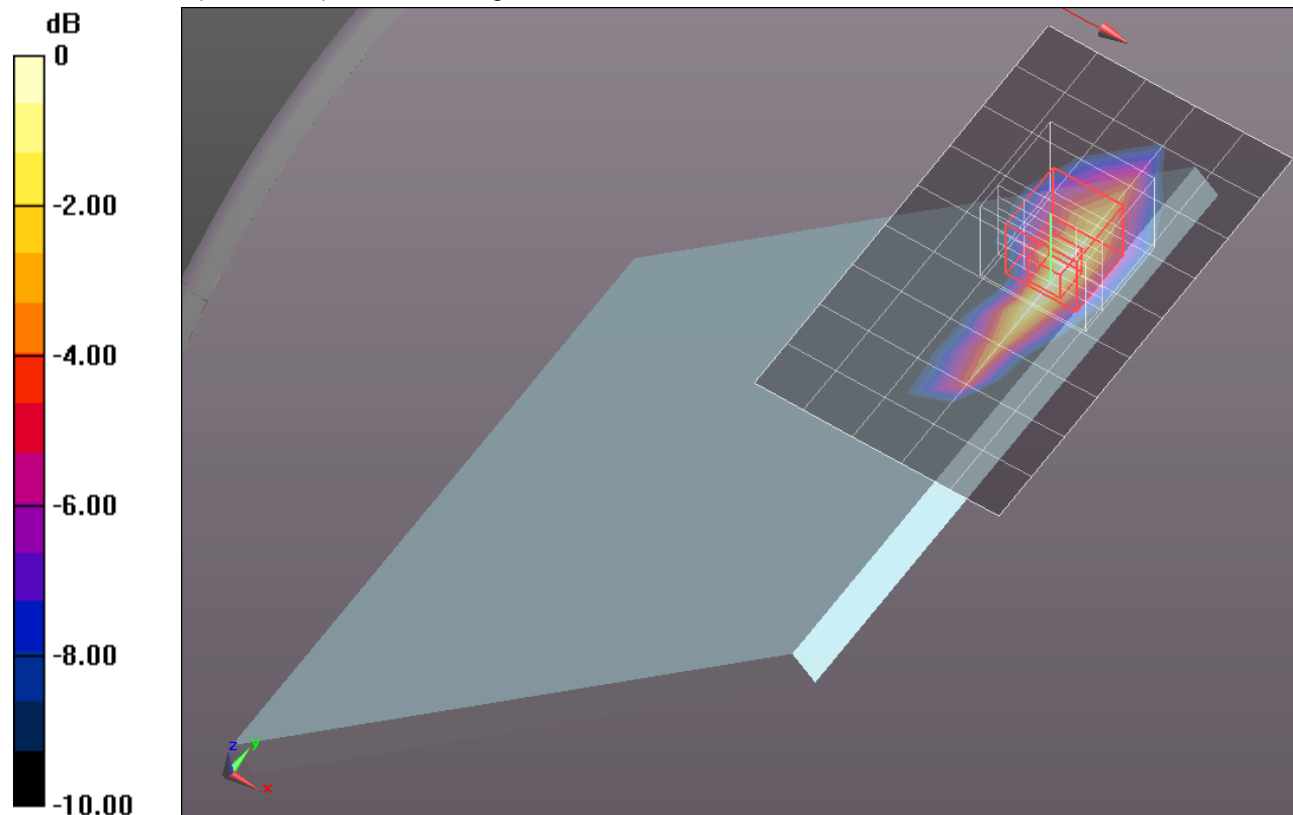

0 dB = 1.490mW/g = 3.46 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 53.098$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear with 12mm/1xEVDO_Rel.0_ch 1013/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.839 mW/g


Rear with 12mm/1xEVDO_Rel.0_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.800 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.0580

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.444 mW/g

Maximum value of SAR (measured) = 0.889 mW/g

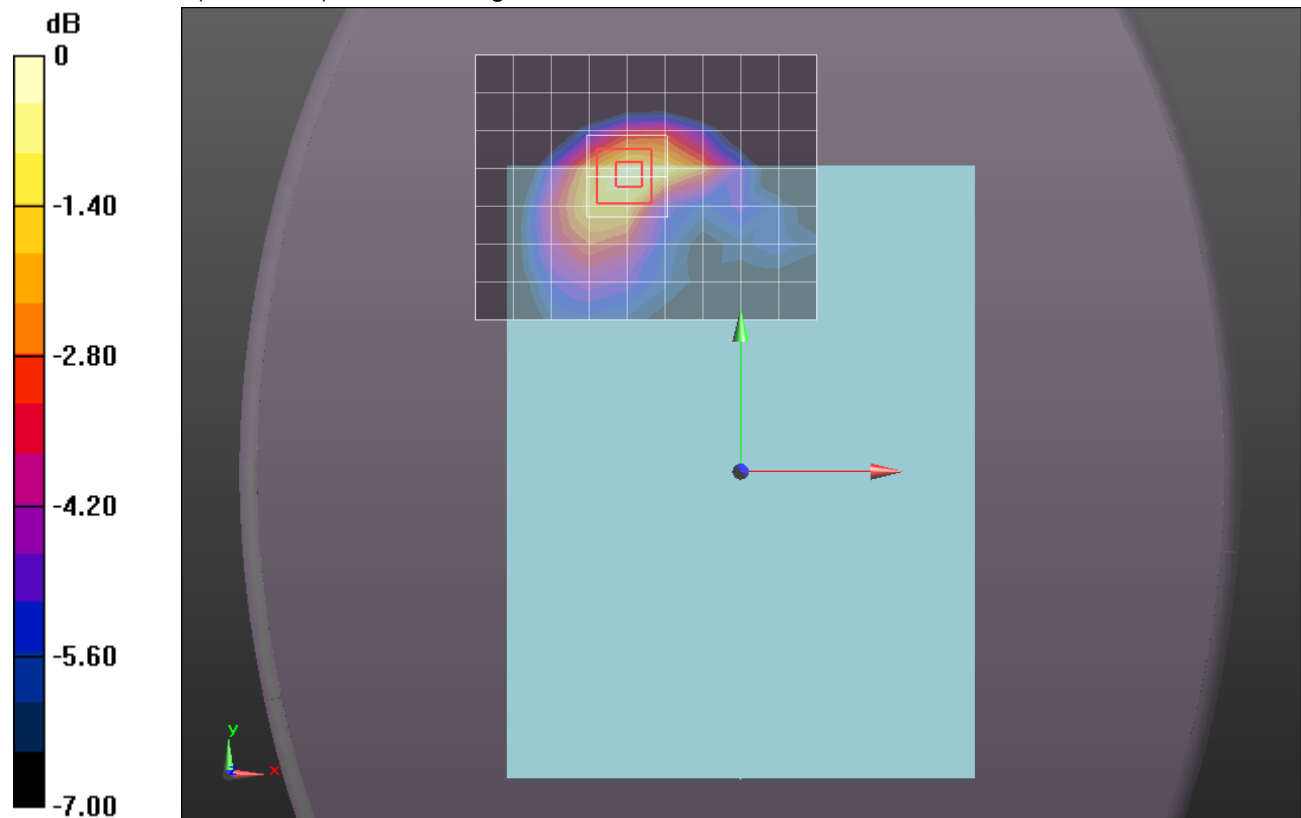

0 dB = 0.890mW/g = -1.01 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.974$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear with 12mm/1xEVDO_Rel.0_ch 384/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.007 mW/g

Rear with 12mm/1xEVDO_Rel.0_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.374 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.2500

SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.524 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.055 mW/g

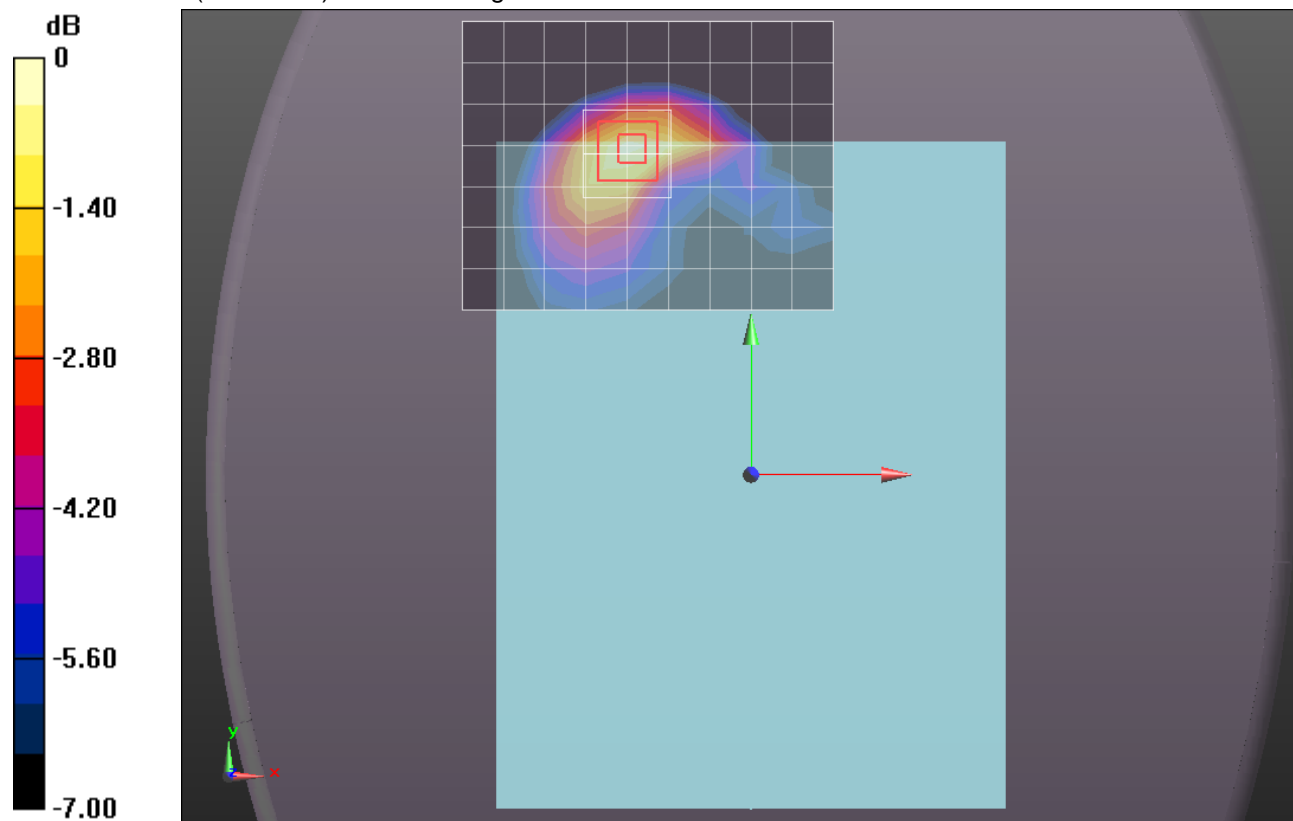

0 dB = 1.050mW/g = 0.42 dB mW/g


CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear with 12mm/1xEVDO_Rel.0_ch 384/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.030 mW/g

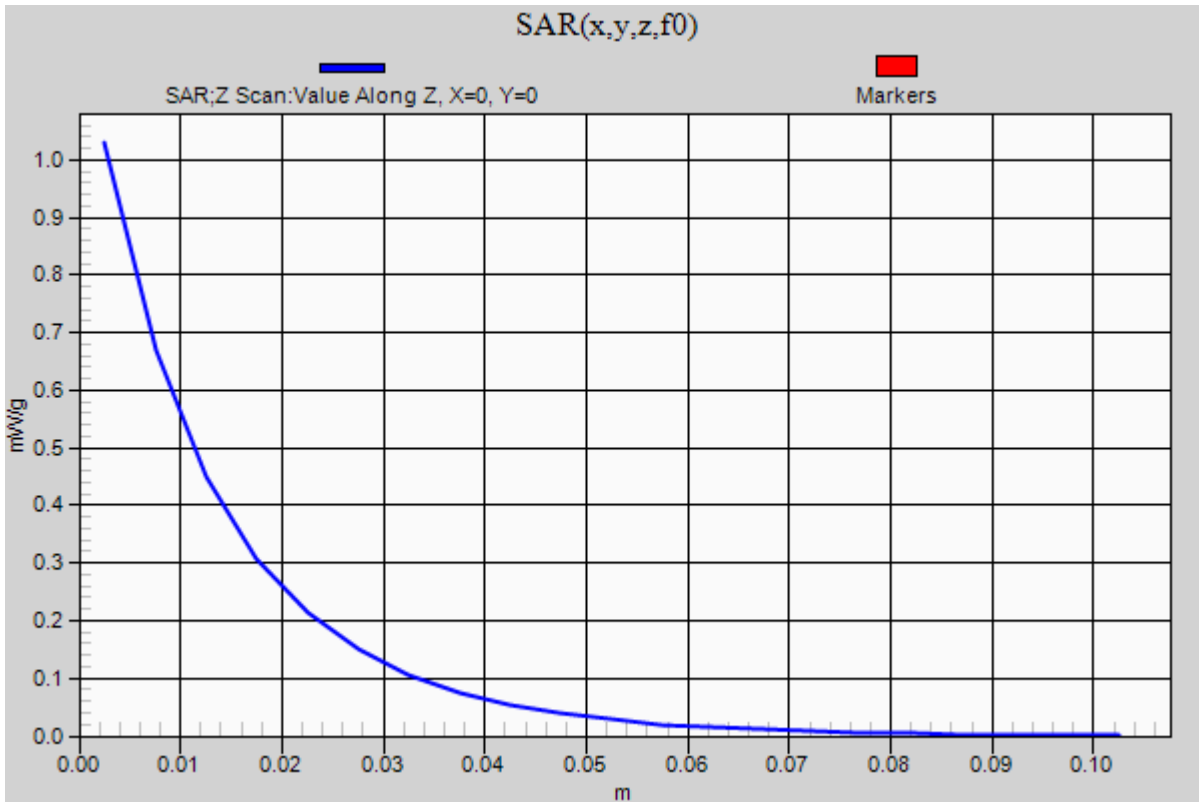

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.027$ mho/m; $\epsilon_r = 52.855$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear with 12mm/1xEVDO_Rel.0_ch 777/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.825 mW/g

Rear with 12mm/1xEVDO_Rel.0_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.978 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.0660

SAR(1 g) = 0.700 mW/g; SAR(10 g) = 0.441 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.915 mW/g

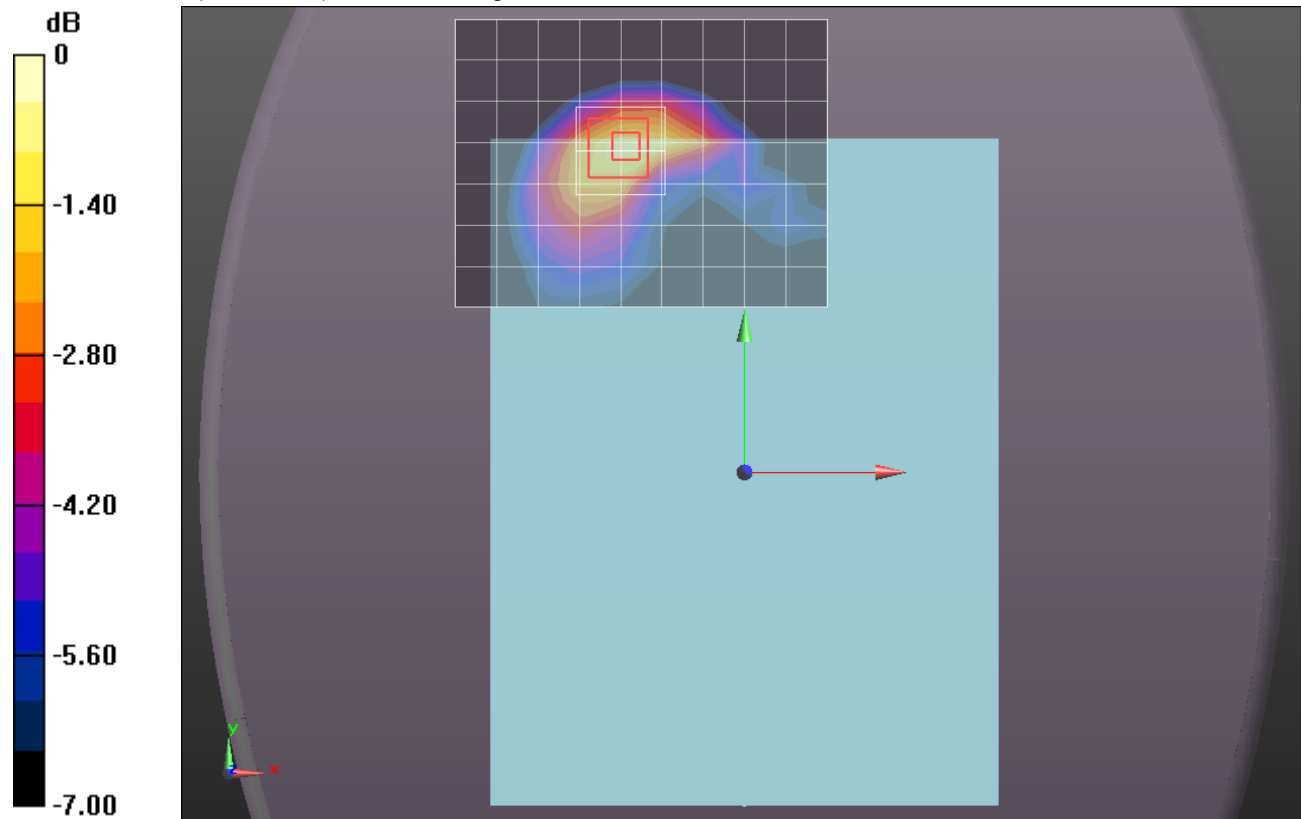

0 dB = 0.910mW/g = -0.82 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.974$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1 with 14mm/1xEVDO_Rel.0_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.651 mW/g

Edge 1 with 14mm/1xEVDO_Rel.0_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.477 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.7800

SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.355 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.662 mW/g

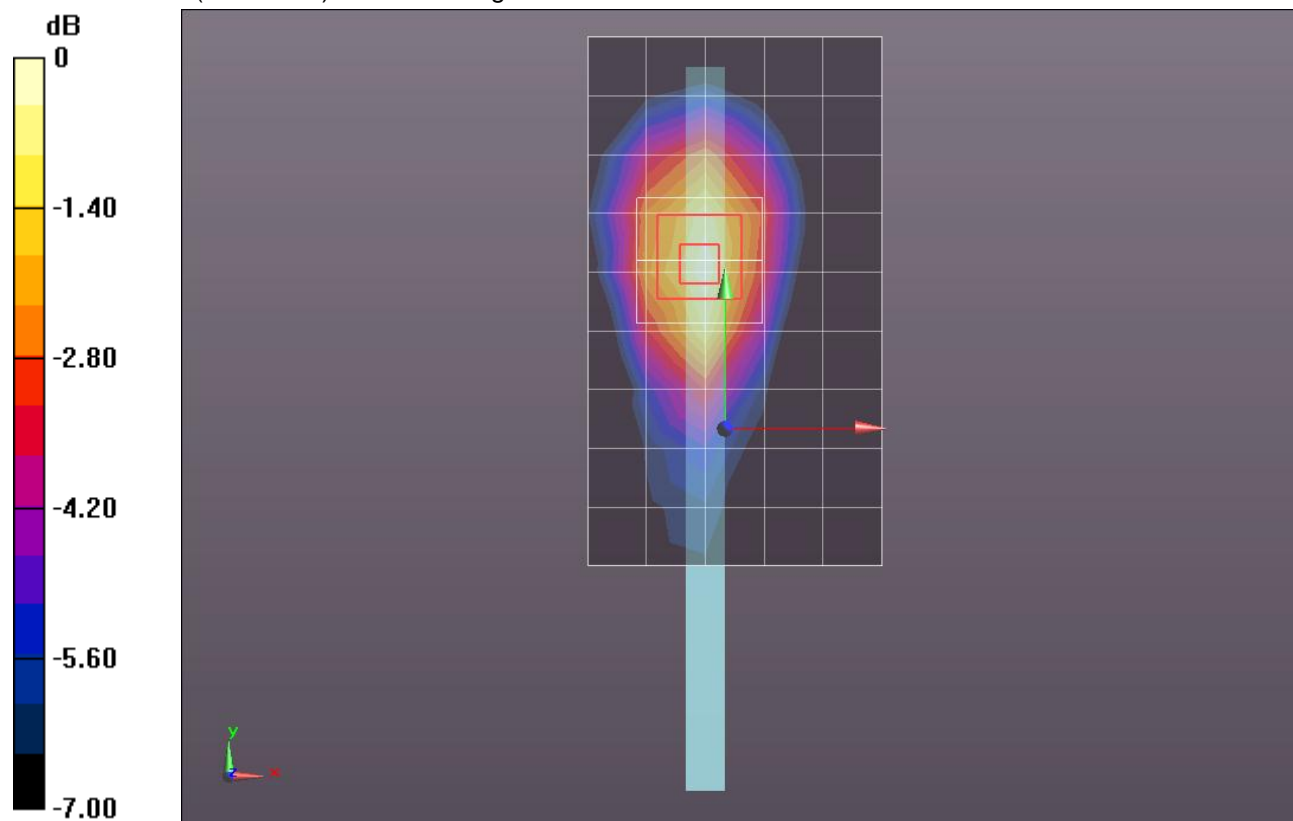

0 dB = 0.660mW/g = -3.61 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.974$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

27 deg Right Tilt @ Edge 1/1xEVDO_Rel.0_ch 384/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.580 mW/g

27 deg Right Tilt @ Edge 1/1xEVDO_Rel.0_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.294 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.1790

SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.355 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.812 mW/g

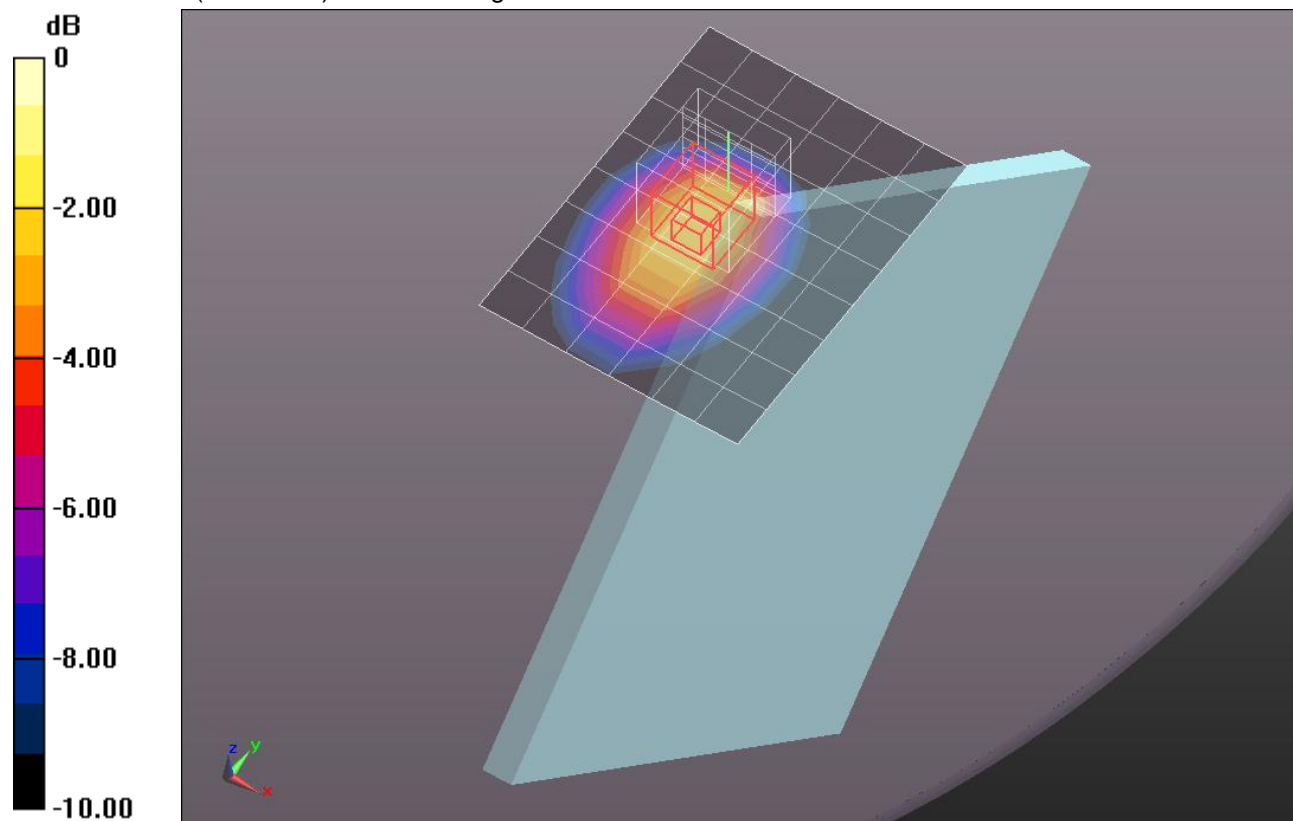

0 dB = 0.810mW/g = -1.83 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 52.974$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 2/1xEVDO_Rel.0_ch 384/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.446 mW/g

Edge 2/1xEVDO_Rel.0_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.246 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.9190

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.265 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.699 mW/g

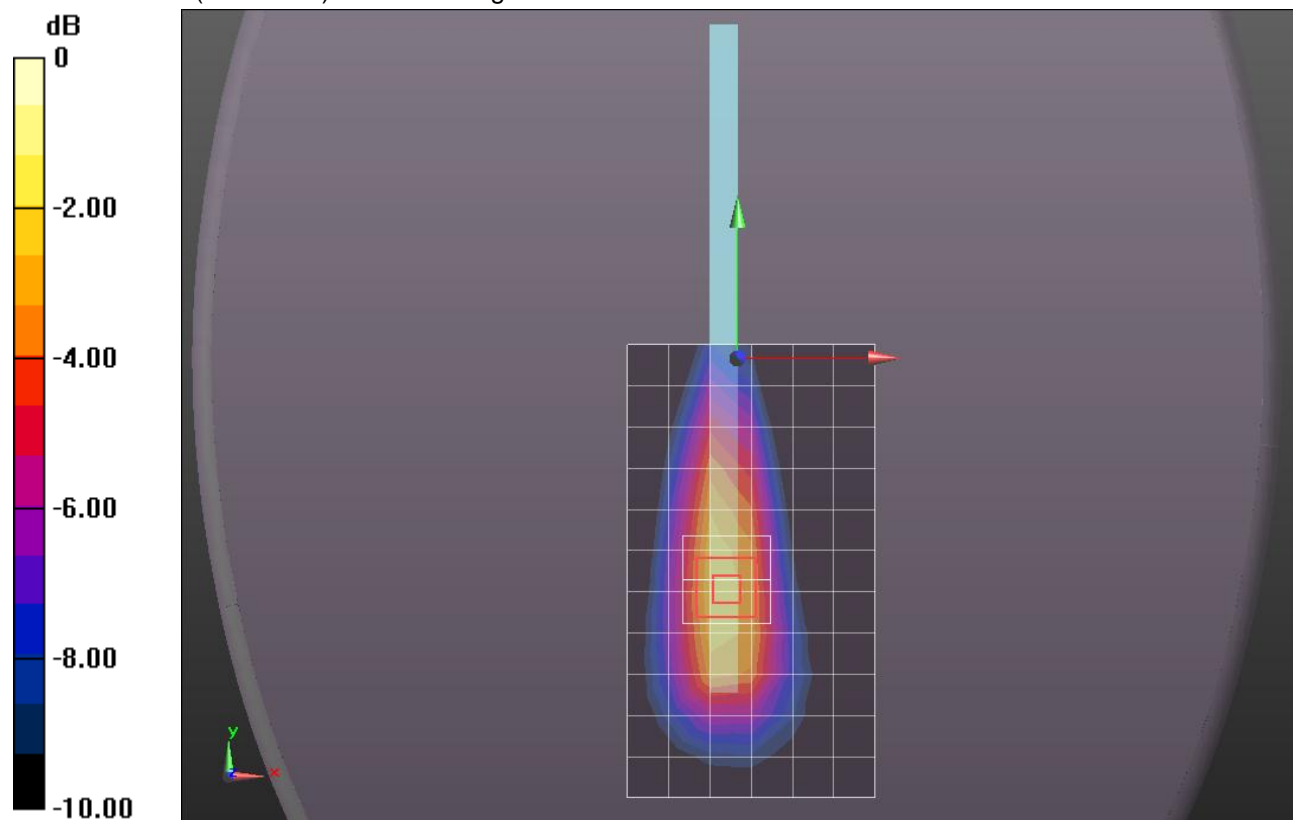

0 dB = 0.700mW/g = -3.10 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 52.986$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rev. B_2 Carrier Mini_ch 1013/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.193 mW/g


Rear/1xEVDO_Rev. B_2 Carrier Mini_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.613 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.6160

SAR(1 g) = 0.845 mW/g; SAR(10 g) = 0.456 mW/g

Maximum value of SAR (measured) = 1.243 mW/g

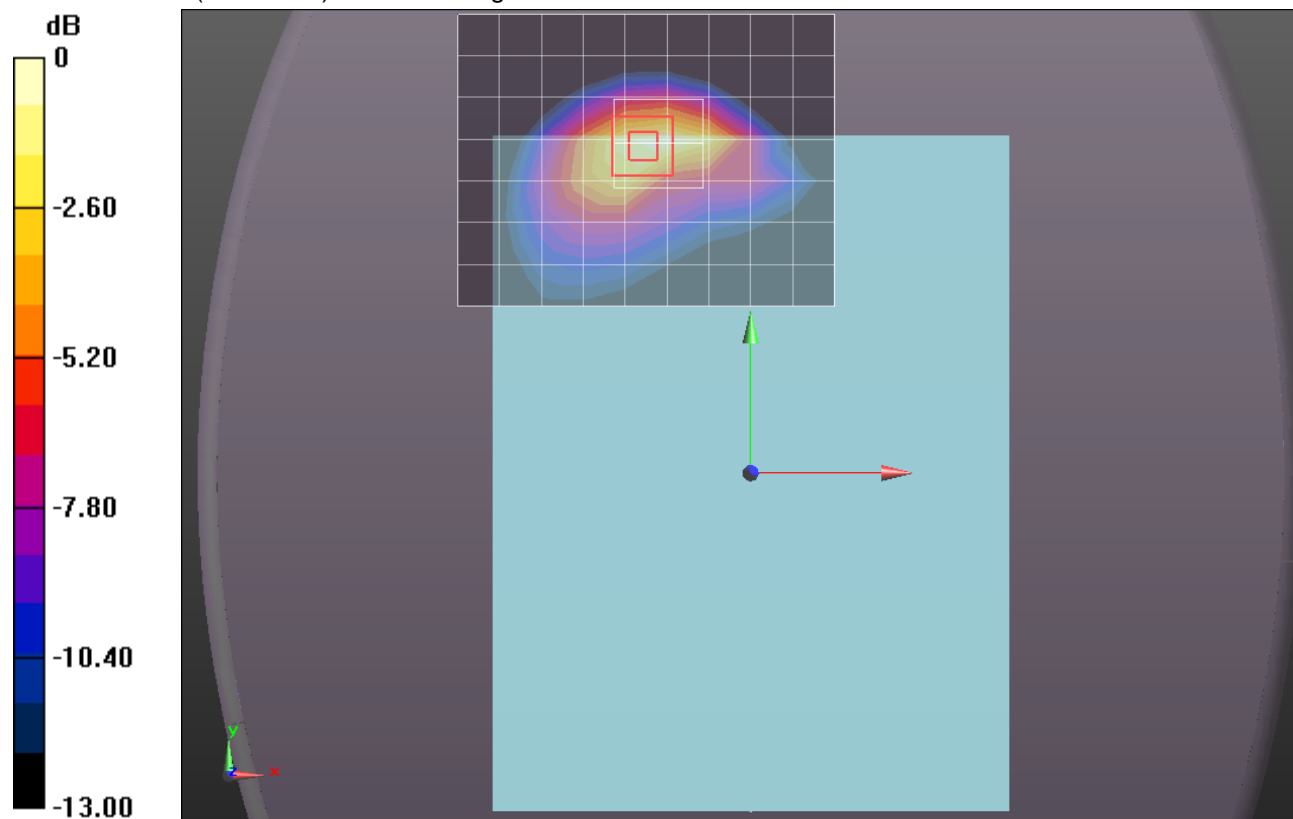

0 dB = 1.240mW/g = 1.87 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.014$ mho/m; $\epsilon_r = 52.708$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012

- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rev. B_2 Carrier Mini Mini_ch 384/Area Scan (10x8x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.482 mW/g

Rear/1xEVDO_Rev. B_2 Carrier Mini Mini_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 38.764 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.2460

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.610 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.580 mW/g

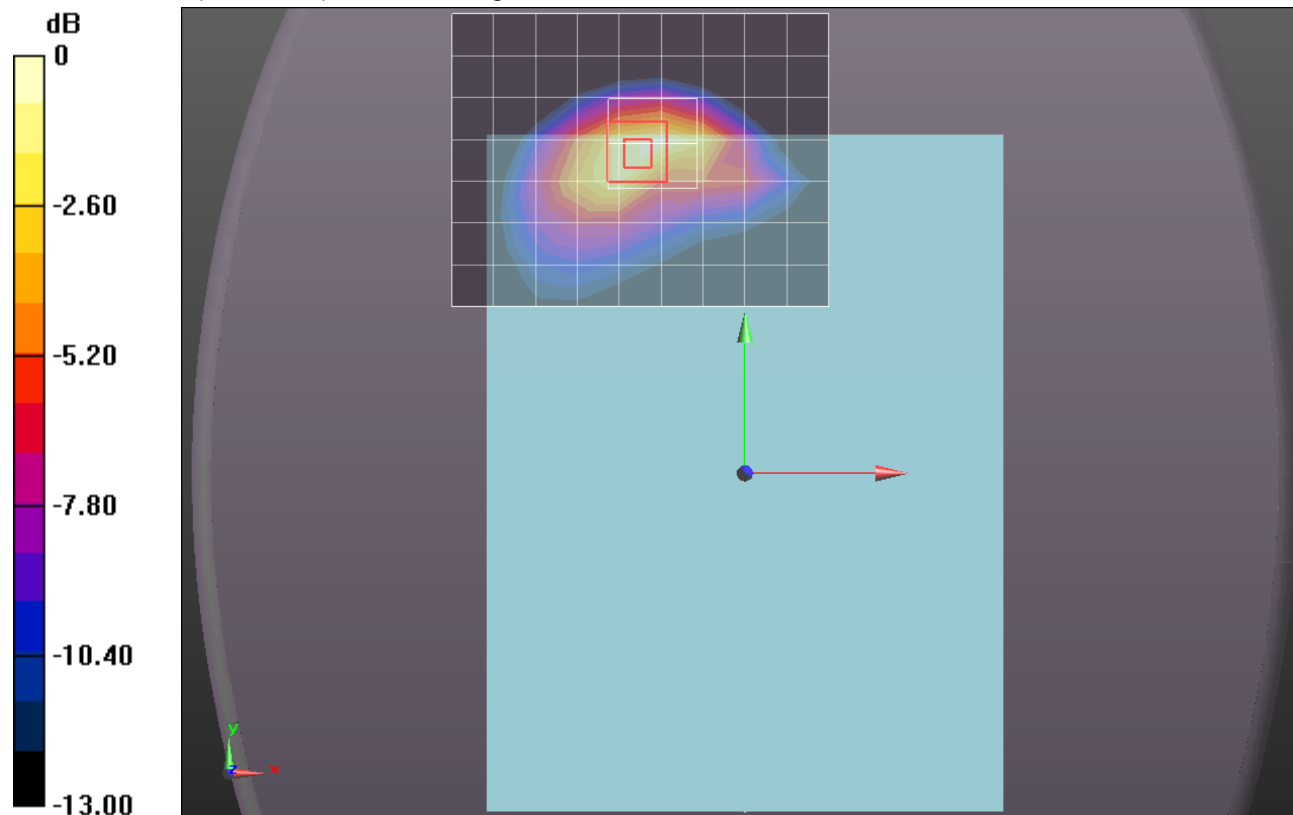

0 dB = 1.580mW/g = 3.97 dB mW/g


CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEVDO_Rev. B_2 Carrier Mini Mini_ch 384/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.436 mW/g

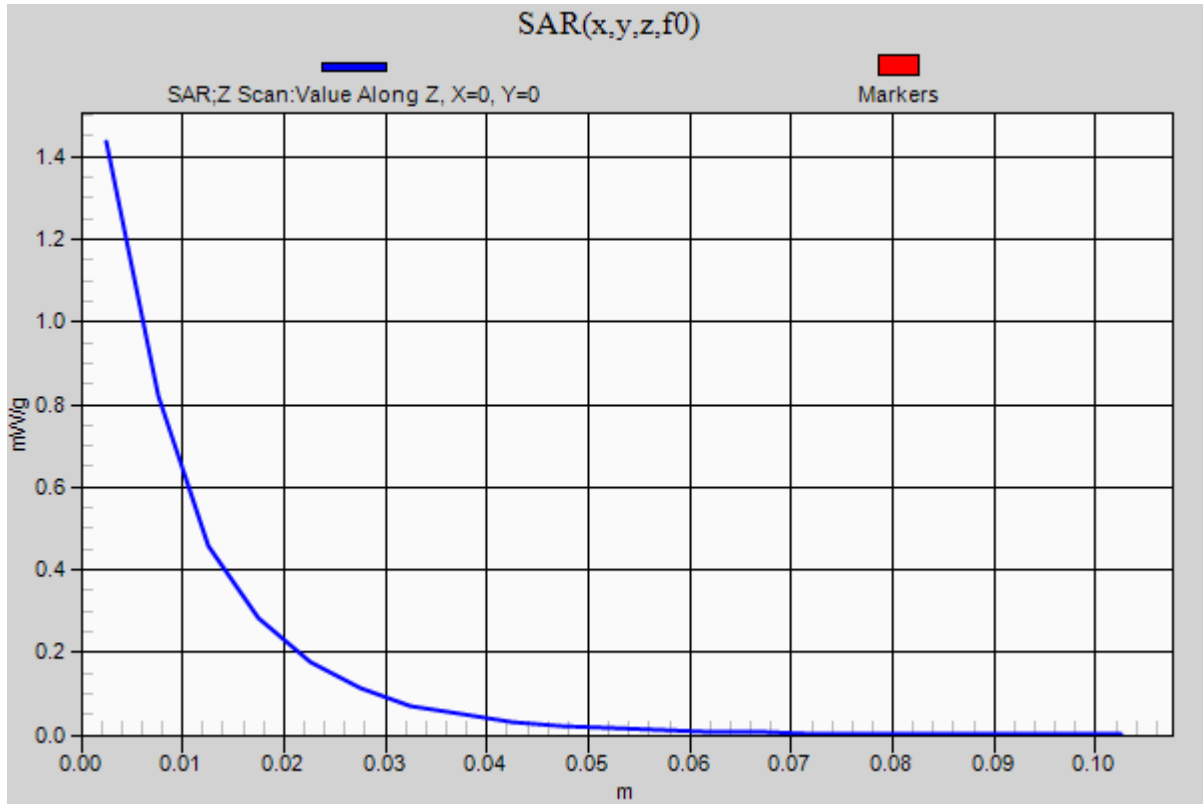

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.029$ mho/m; $\epsilon_r = 52.722$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rev. B_2 Carrier Mini_ch 777/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.293 mW/g

Rear/1xEVDO_Rev. B_2 Carrier Mini_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.884 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.8210

SAR(1 g) = 0.934 mW/g; SAR(10 g) = 0.497 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.286 mW/g

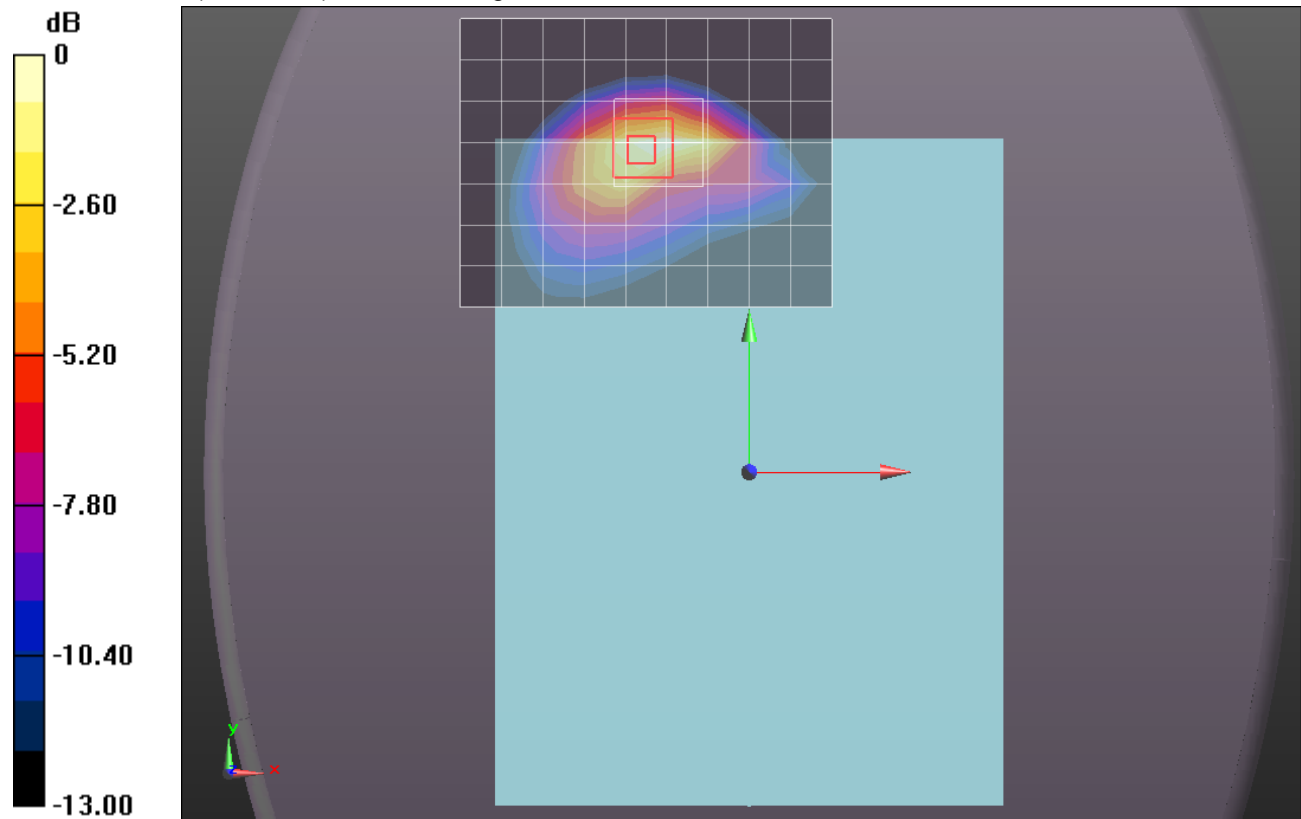

0 dB = 1.290mW/g = 2.21 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 52.986$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012

- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 1013/Area Scan (6x10x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.914 mW/g

Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 30.754 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.3120

SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 1.024 mW/g

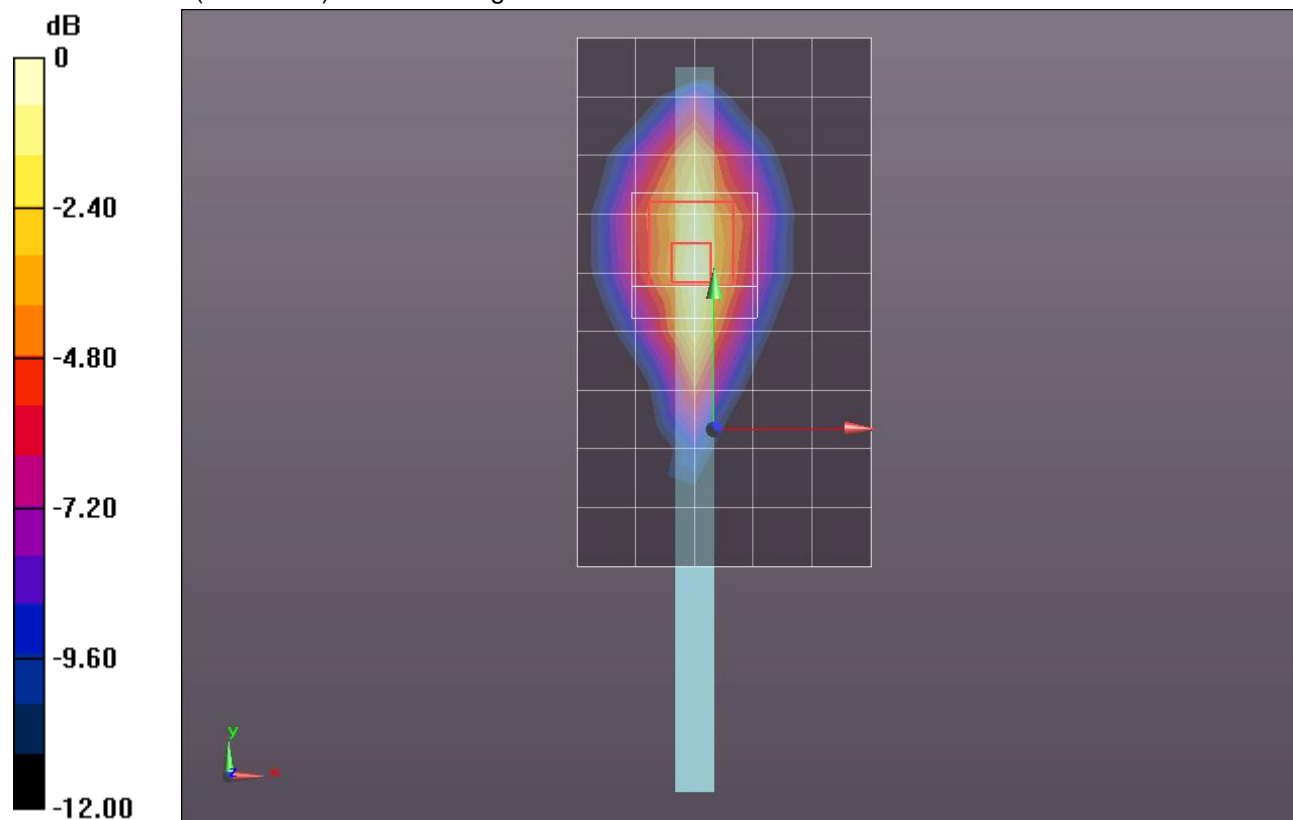

0 dB = 1.020mW/g = 0.17 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.014$ mho/m; $\epsilon_r = 52.708$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012

- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.787 mW/g

Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.173 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.6210

SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.393 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.259 mW/g

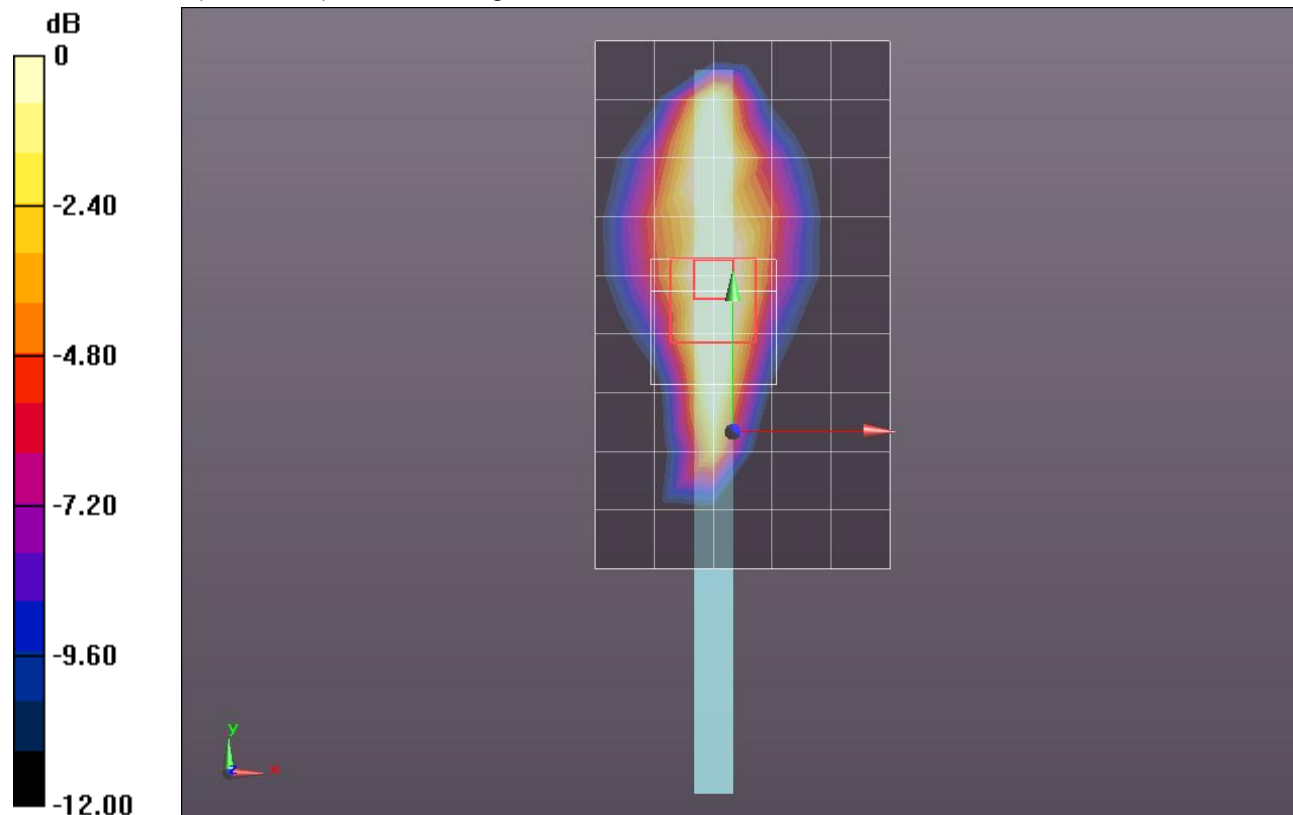

0 dB = 1.260mW/g = 2.01 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.029$ mho/m; $\epsilon_r = 52.722$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012

- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 777/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.842 mW/g

Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.635 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.3630

SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.349 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.025 mW/g

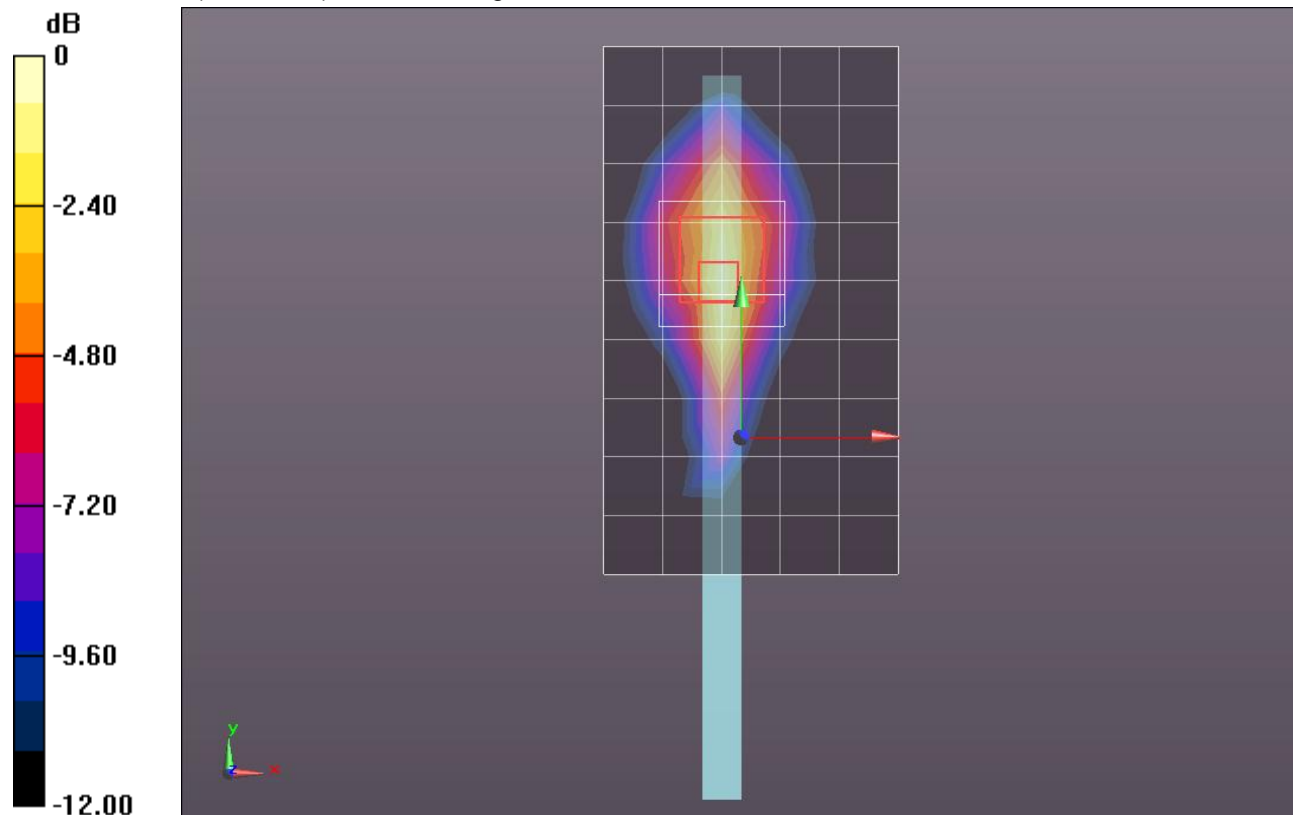

0 dB = 1.020mW/g = 0.17 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 52.986$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 1013/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.231 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 1013/Zoom Scan (5x5x7)/Cube


0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.459 V/m; Power Drift = -0.0042 dB

Peak SAR (extrapolated) = 1.6680

SAR(1 g) = 0.802 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 1.276 mW/g

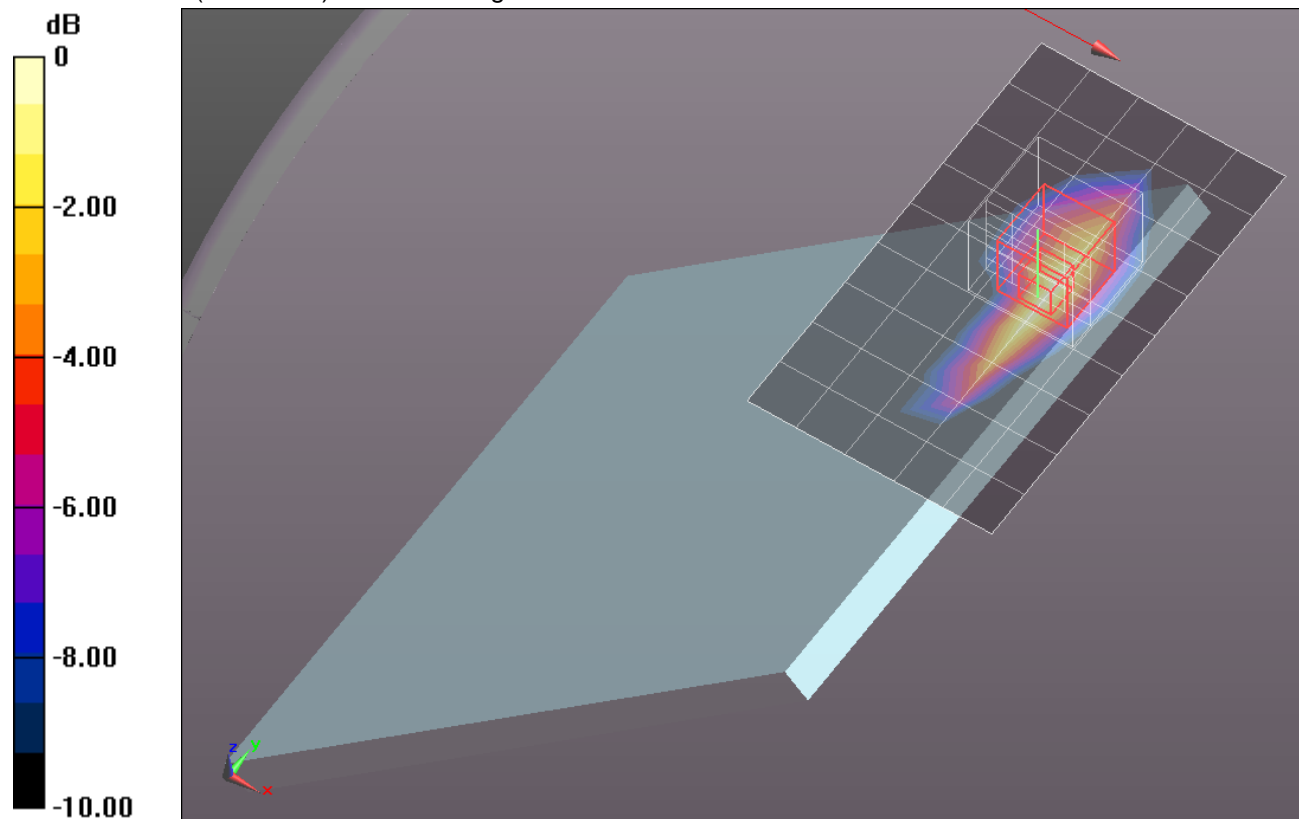

0 dB = 1.280mW/g = 2.14 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.014$ mho/m; $\epsilon_r = 52.708$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 384/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.088 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 34.974 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.9420

SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.443 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.505 mW/g

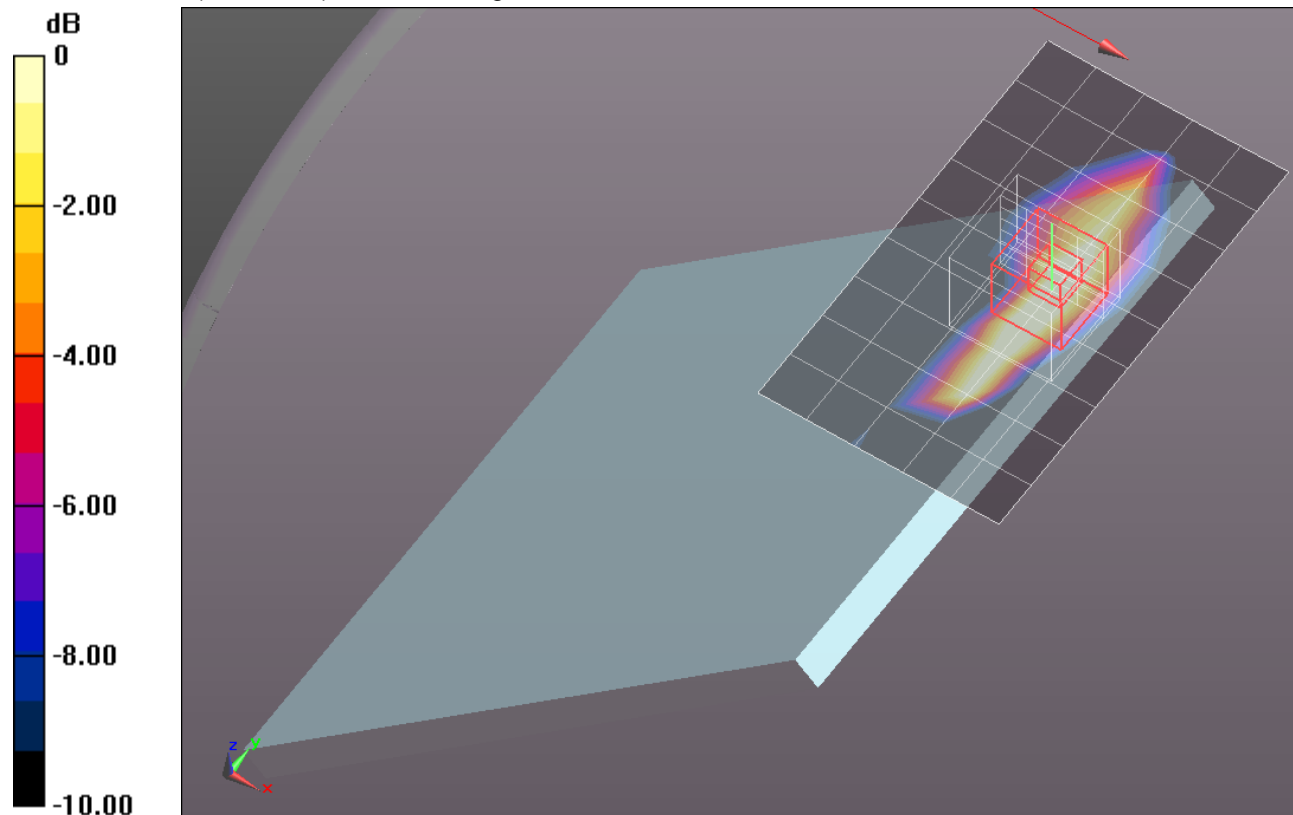

0 dB = 1.500mW/g = 3.52 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.029$ mho/m; $\epsilon_r = 52.722$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 777/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.309 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rev. B_2 Carrier Mini_ch 777/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 34.620 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.8440

SAR(1 g) = 0.910 mW/g; SAR(10 g) = 0.464 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.448 mW/g

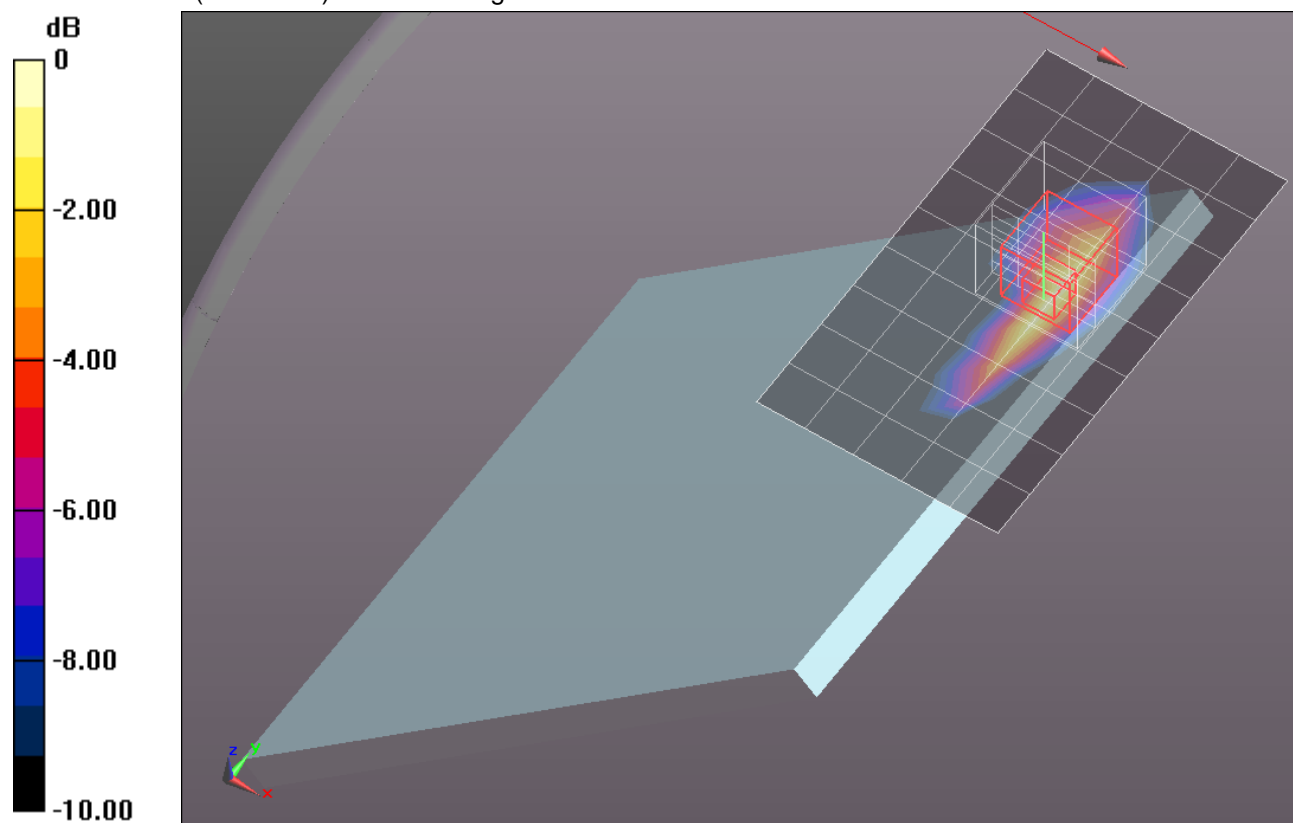

0 dB = 1.450mW/g = 3.23 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.015$ mho/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear with 12mm/1xEVDO_Rev.B_2 Carrier Mini_ch 384/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.177 mW/g

Rear with 12mm/1xEVDO_Rev.B_2 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.236 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.6460

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.271 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.538 mW/g

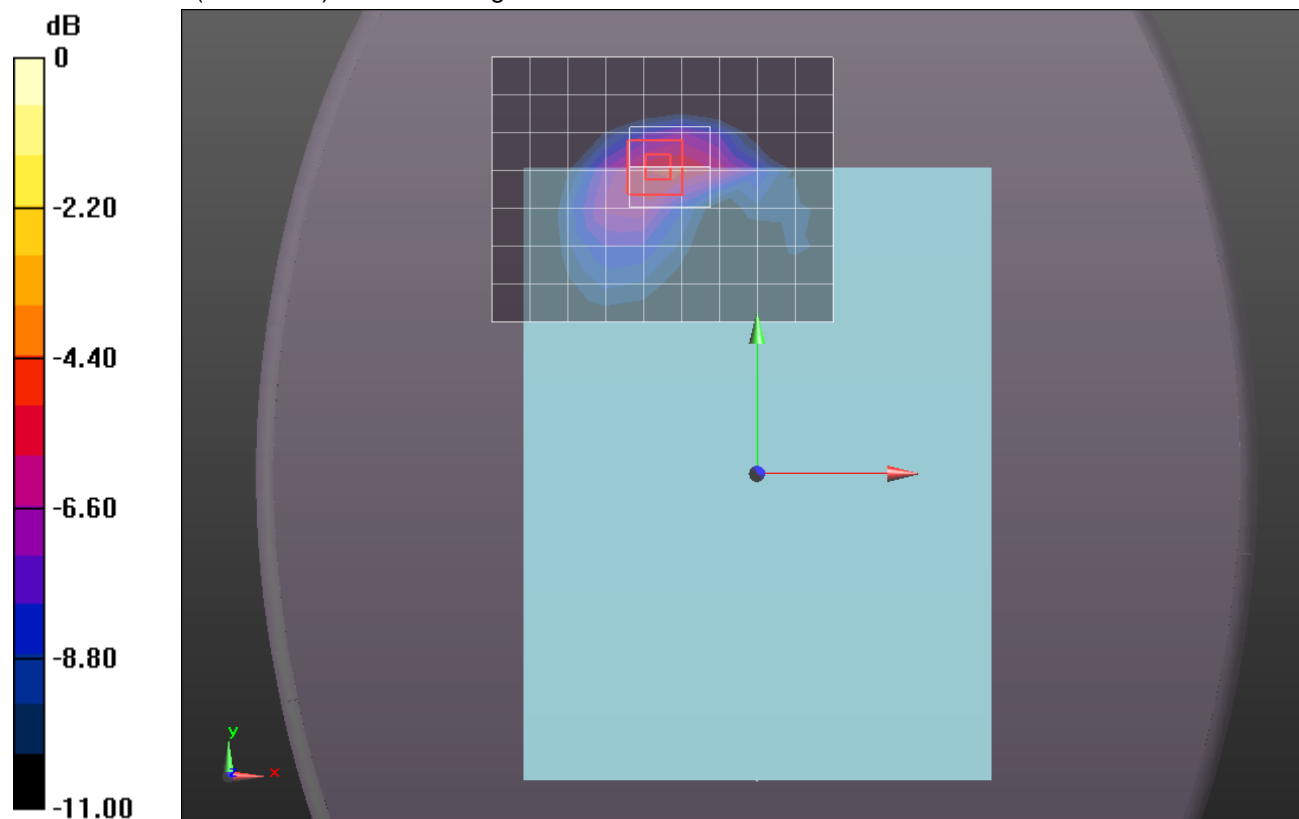

0 dB = 0.540mW/g = -5.35 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.015$ mho/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1 with 14mm/1xEVDO_Rev.B_2 Carrier Mini_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.313 mW/g

Edge 1 with 14mm/1xEVDO_Rev.B_2 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.501 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.3590

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.165 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.307 mW/g

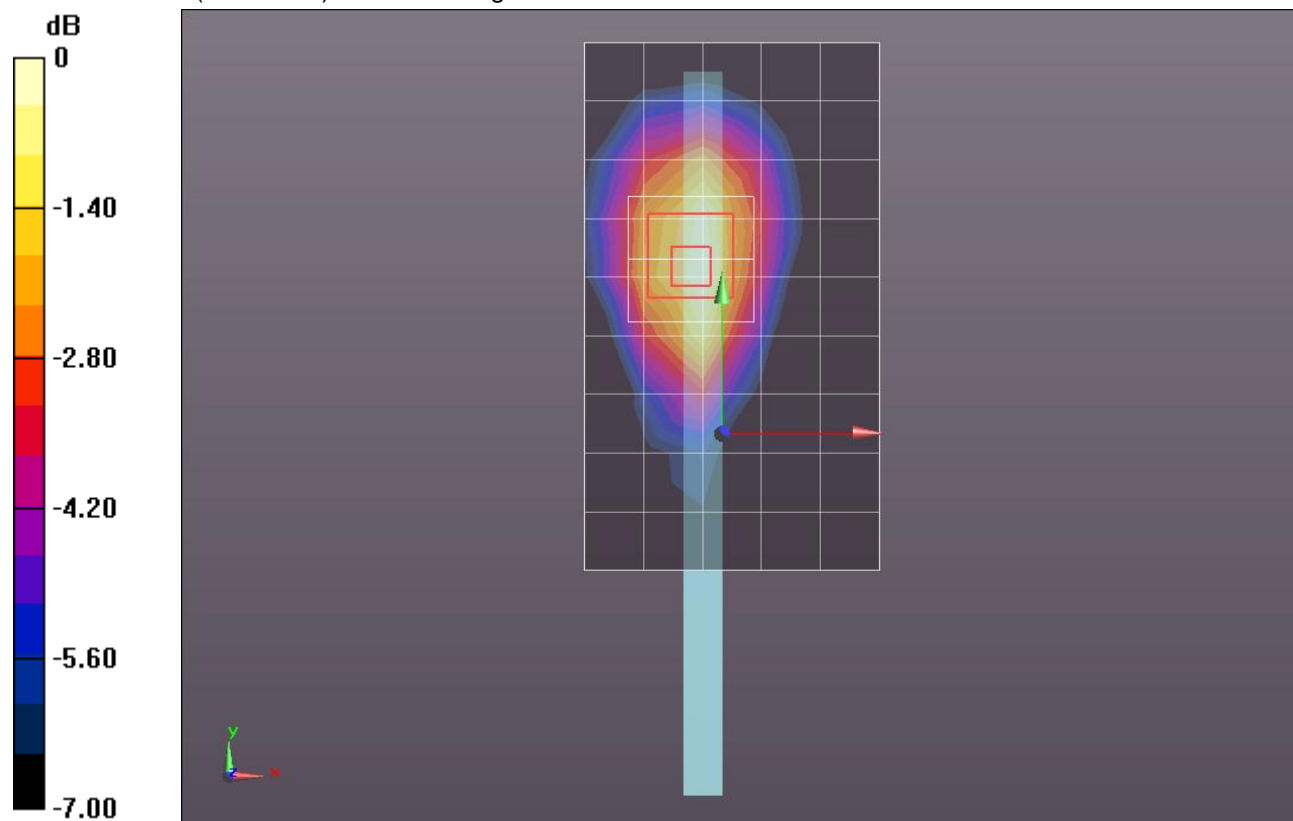

0 dB = 0.310mW/g = -10.17 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.015$ mho/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

27 deg Right Tilt @ Edge 1/1xEVDO_Rev.B_2 Carrier Mini_ch 384/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.215 mW/g

27 deg Right Tilt @ Edge 1/1xEVDO_Rev.B_2 Carrier Mini_ch 384/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.305 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.4880

SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.143 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.367 mW/g

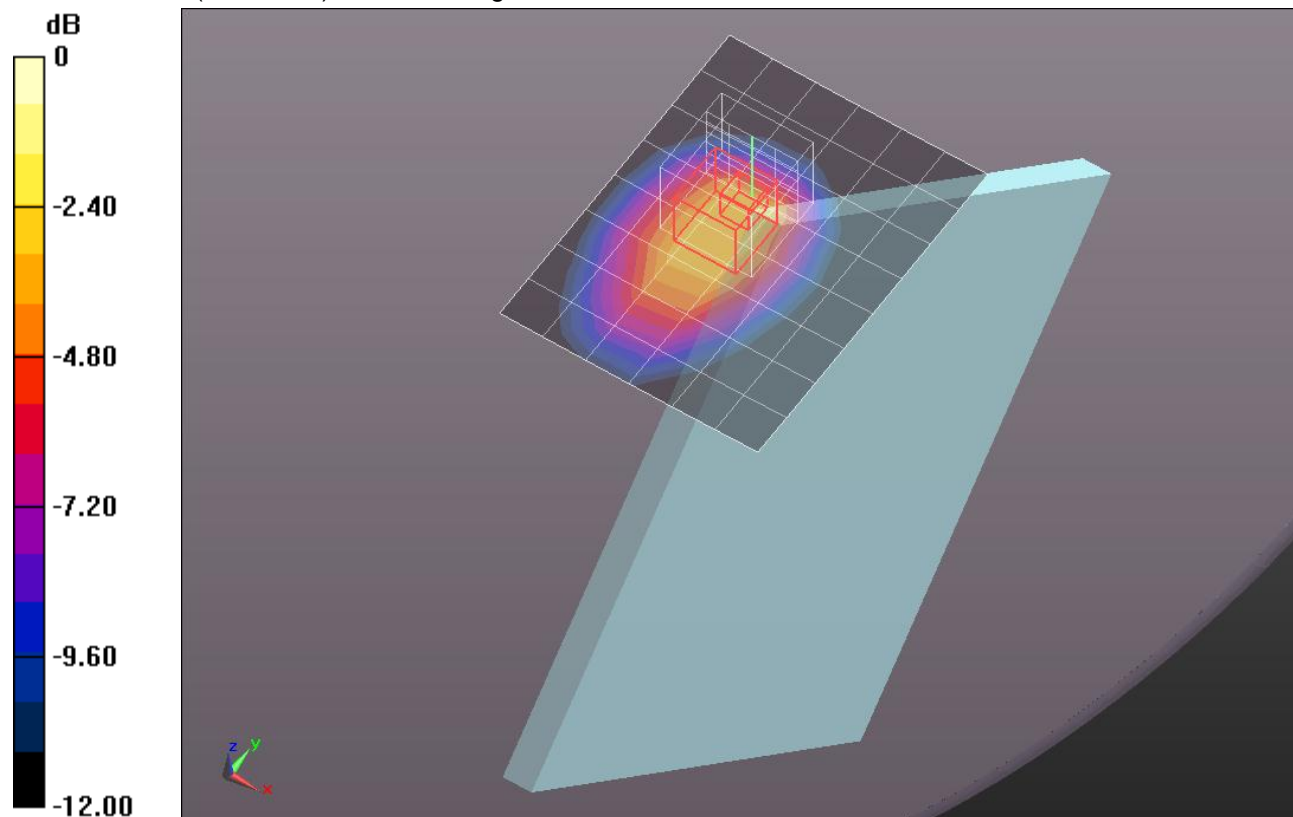

0 dB = 0.370mW/g = -8.64 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.015$ mho/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 2/1xEVDO_Rev.B_2 Carrier Mini_ch 384/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.062 mW/g

Edge 2/1xEVDO_Rev.B_2 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.648 V/m; Power Drift = 0.00073 dB

Peak SAR (extrapolated) = 0.1160

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.029 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.084 mW/g

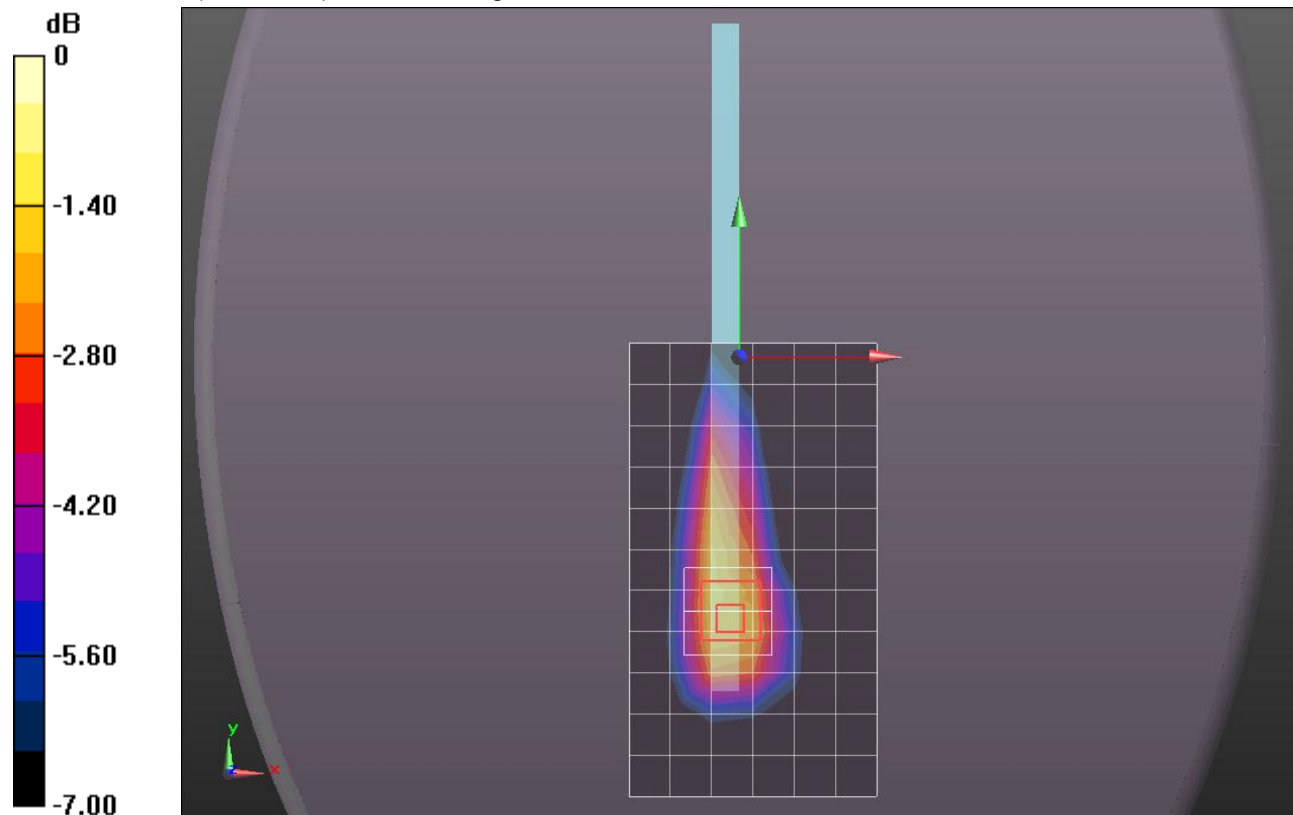

0 dB = 0.080mW/g = -21.94 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 52.986$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rev. B_3 Carrier Mini_ch 1013/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.334 mW/g


Rear/1xEVDO_Rev. B_3 Carrier Mini_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.879 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.7430

SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.490 mW/g

Maximum value of SAR (measured) = 1.346 mW/g

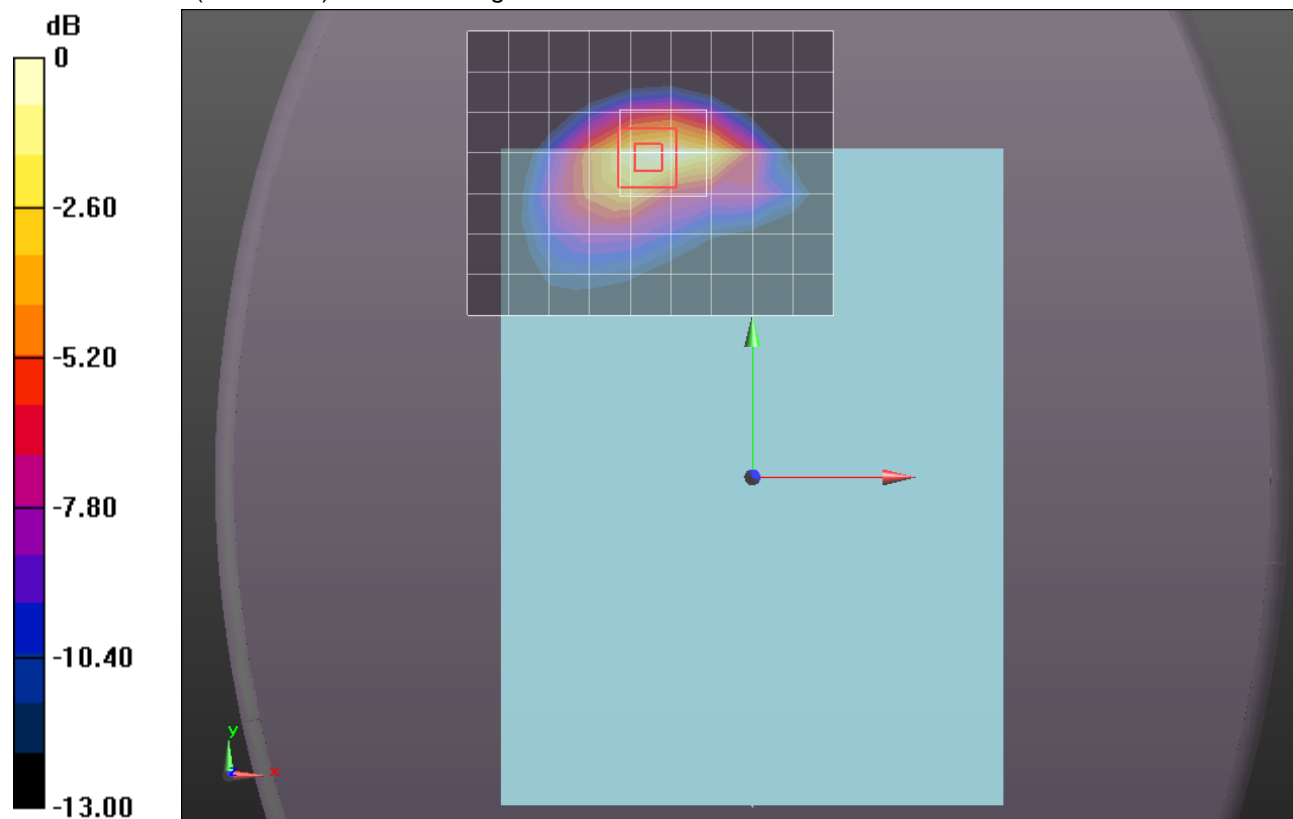

0 dB = 1.350mW/g = 2.61 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.014$ mho/m; $\epsilon_r = 52.708$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rev. B_3 Carrier Mini_ch 384/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.438 mW/g

Rear/1xEVDO_Rev. B_3 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 38.756 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.0880

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.588 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.557 mW/g

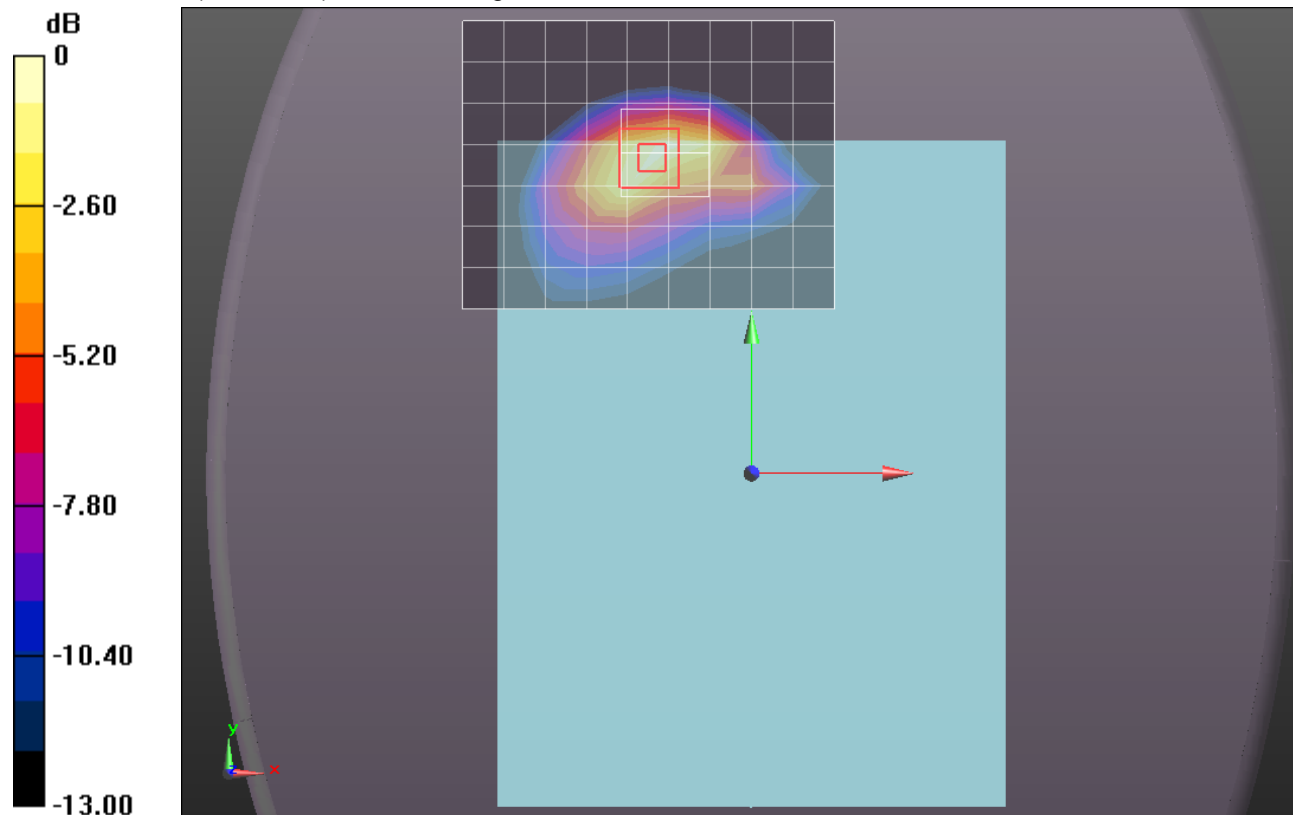

0 dB = 1.560mW/g = 3.86 dB mW/g


CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1

Rear/1xEVDO_Rev. B_3 Carrier Mini_ch 384/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.506 mW/g

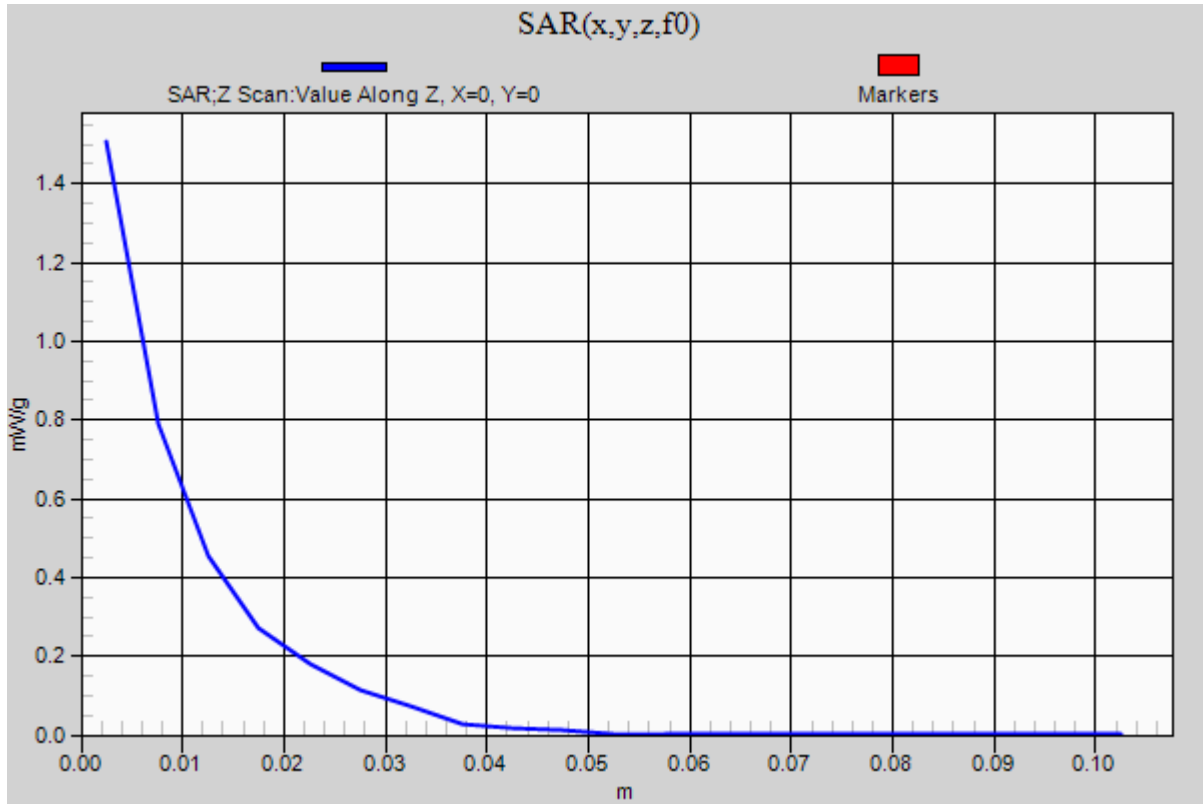

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.029$ mho/m; $\epsilon_r = 52.722$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear/1xEVDO_Rev. B_3 Carrier Mini_ch 777/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.548 mW/g

Rear/1xEVDO_Rev. B_3 Carrier Mini_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.577 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.0370

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.546 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.533 mW/g

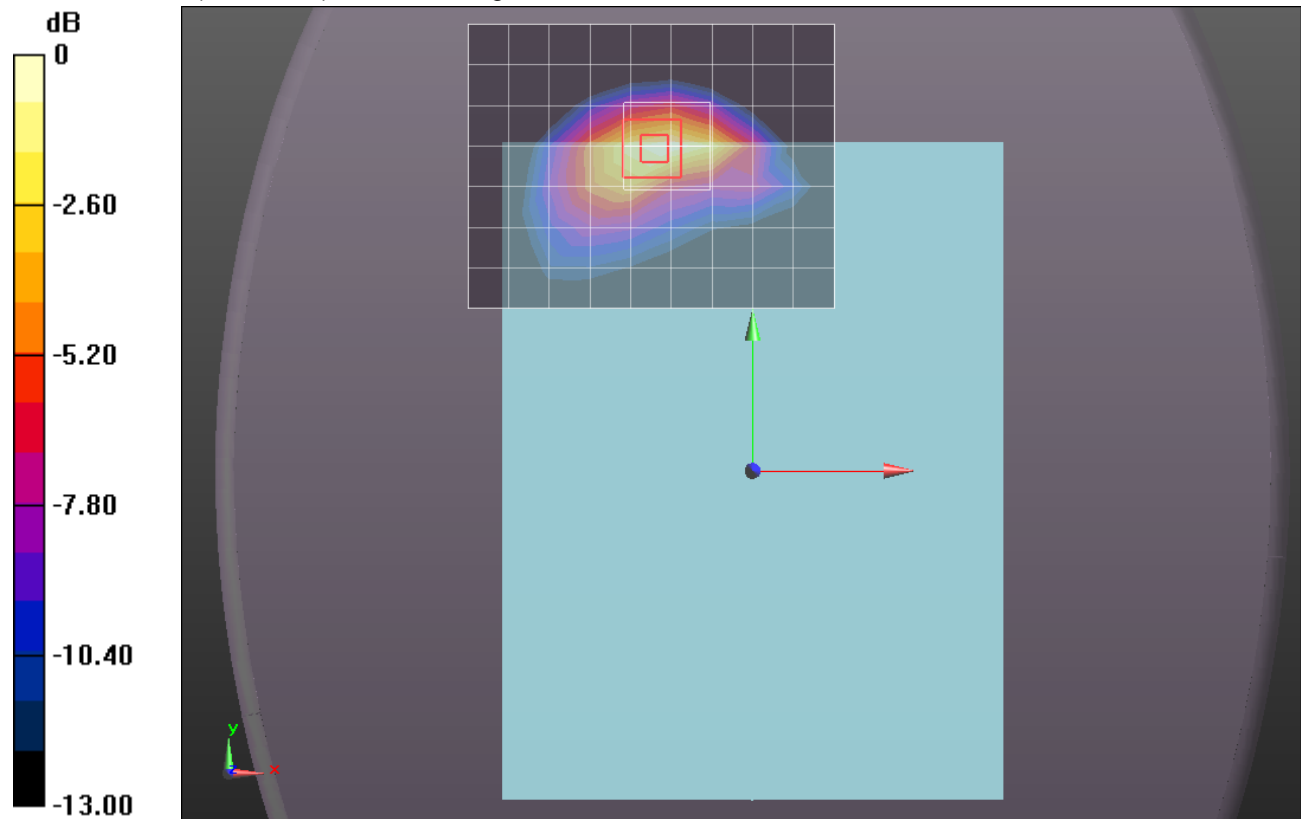

0 dB = 1.530mW/g = 3.69 dB mW/g

CDMA BC0

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 825$ MHz; $\sigma = 1.005$ mho/m; $\epsilon_r = 52.986$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rev. B_3 Carrier Mini_ch 1013/Area Scan (6x10x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.764 mW/g

Edge 1/1xEVDO_Rev. B_3 Carrier Mini_ch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.886 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.2210

SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.382 mW/g

Maximum value of SAR (measured) = 0.969 mW/g

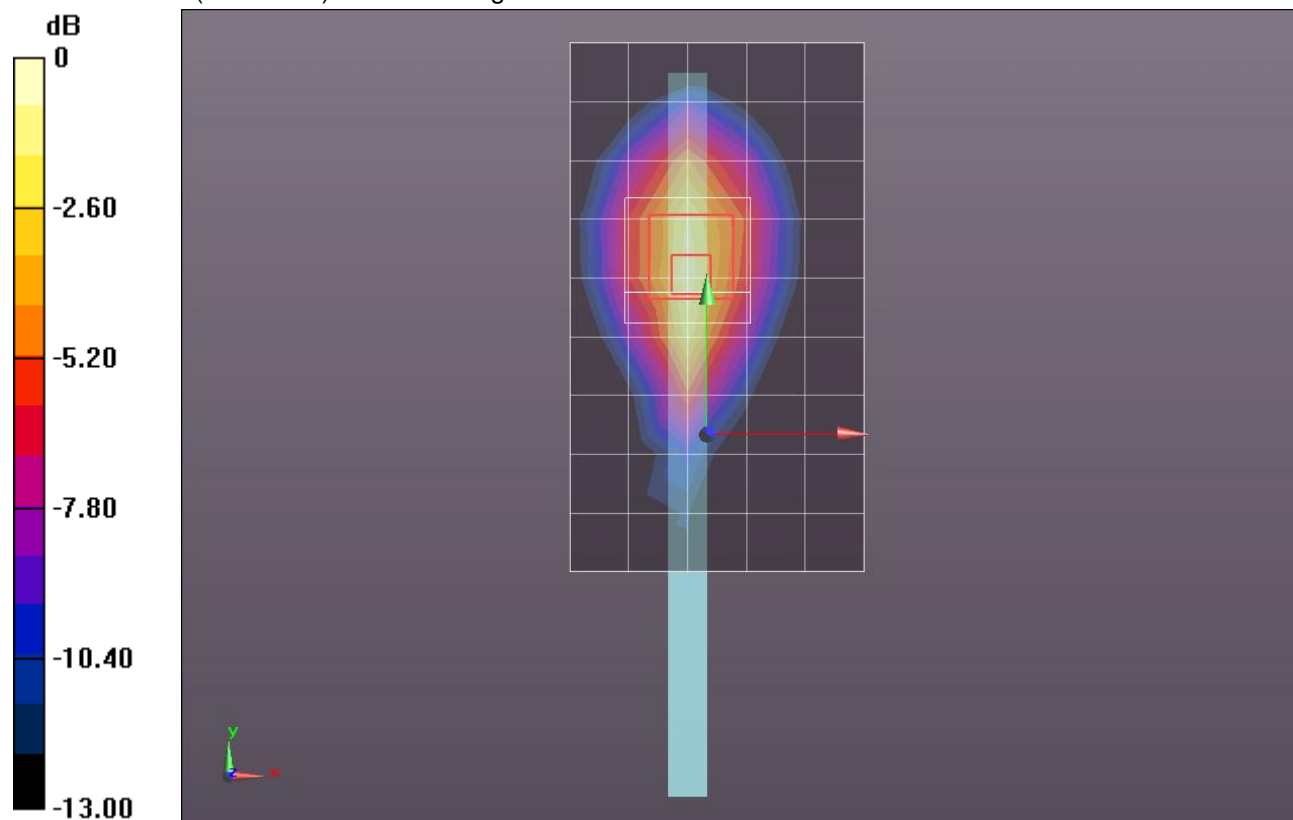

0 dB = 0.970mW/g = -0.26 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.014$ mho/m; $\epsilon_r = 52.708$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012

- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rev. B_3 Carrier Mini_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.394 mW/g

Edge 1/1xEVDO_Rev. B_3 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.199 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.4790

SAR(1 g) = 0.778 mW/g; SAR(10 g) = 0.438 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.115 mW/g

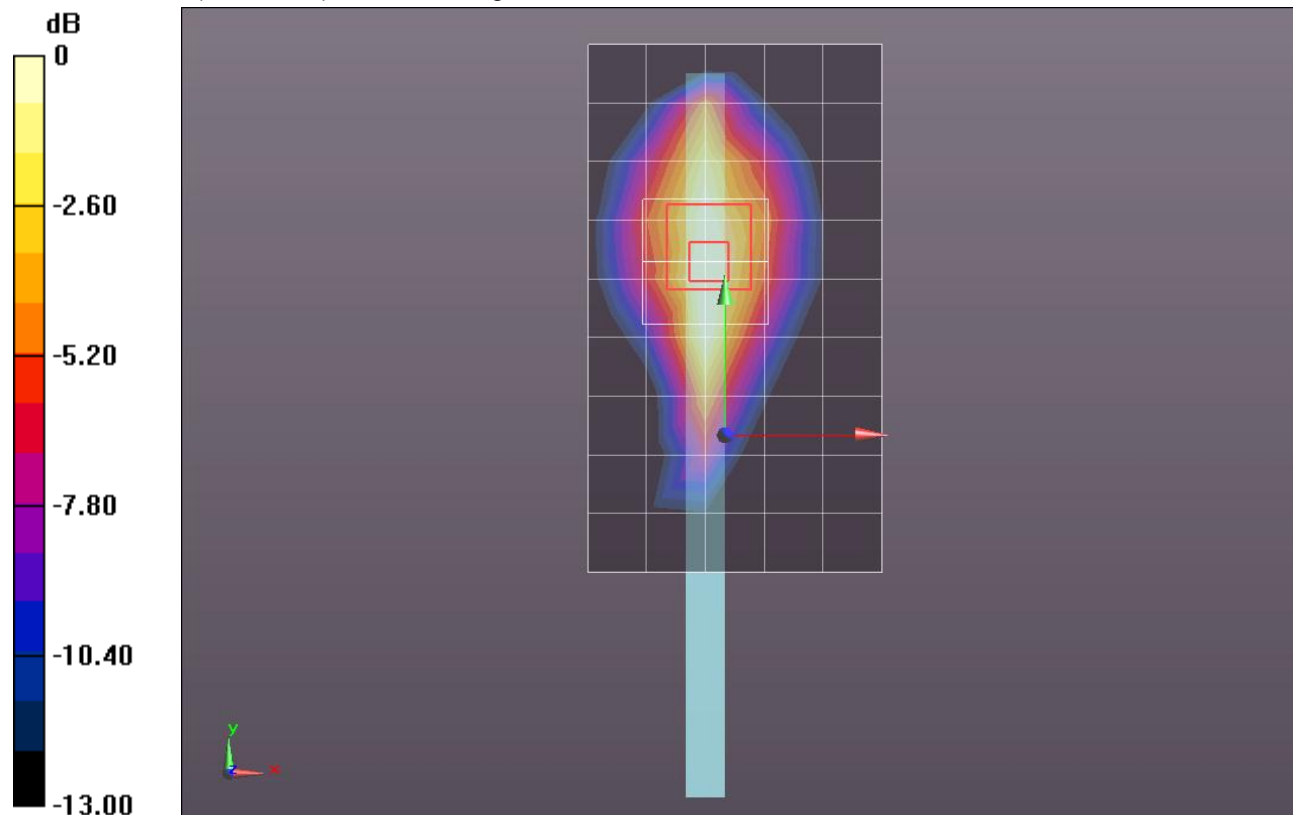

0 dB = 1.110mW/g = 0.91 dB mW/g

CDMA BC0

Frequency: 848.31 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.029$ mho/m; $\epsilon_r = 52.722$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012

- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1/1xEVDO_Rev. B_3 Carrier Mini_ch 777/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.743 mW/g

Edge 1/1xEVDO_Rev. B_3 Carrier Mini_ch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.940 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.2240

SAR(1 g) = 0.631 mW/g; SAR(10 g) = 0.350 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.960 mW/g

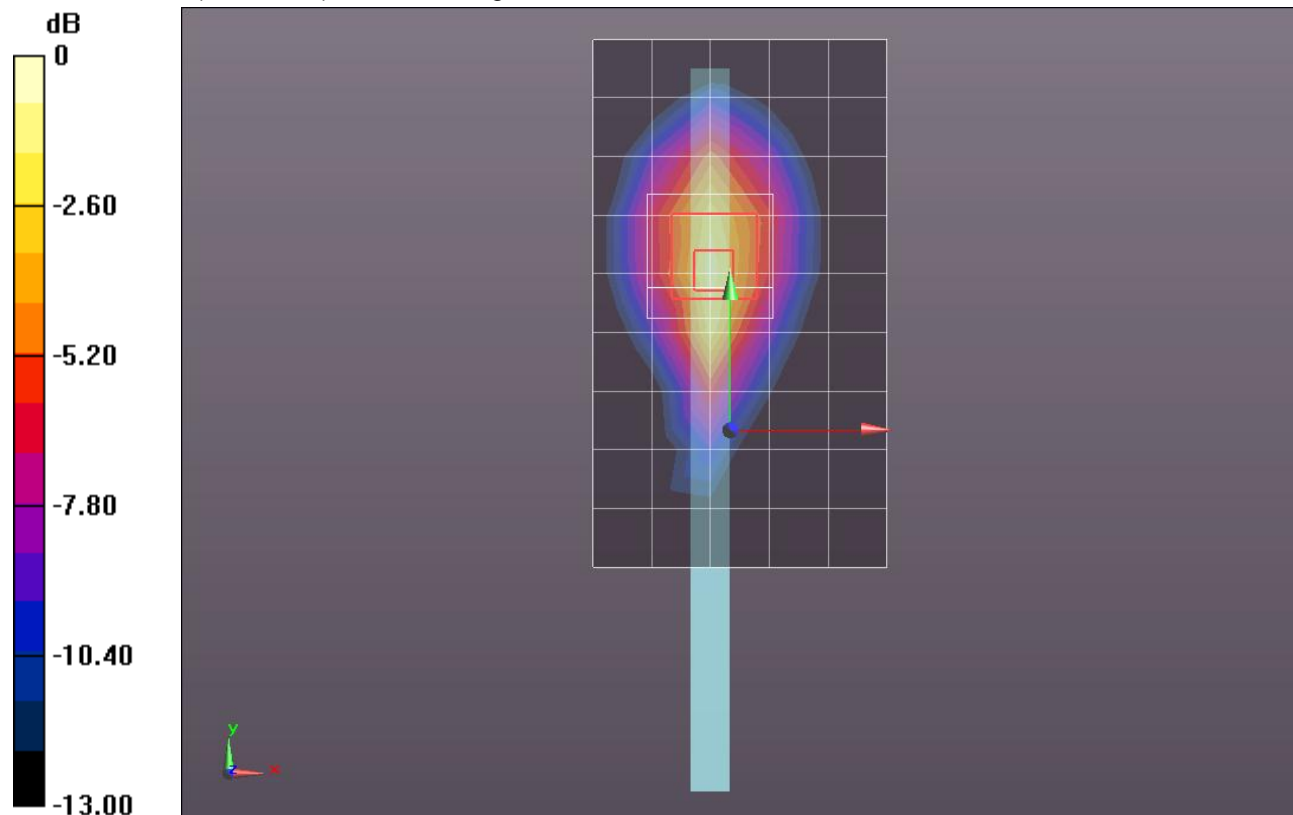

0 dB = 0.960mW/g = -0.35 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.014$ mho/m; $\epsilon_r = 52.708$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

41 deg Tilt @ Edge 1/1xEVDO_Rev. B_3 Carrier Mini_ch 384/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.358 mW/g

41 deg Tilt @ Edge 1/1xEVDO_Rev. B_3 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 30.801 V/m; Power Drift = 0.31 dB

Peak SAR (extrapolated) = 1.5350

SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.373 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.157 mW/g

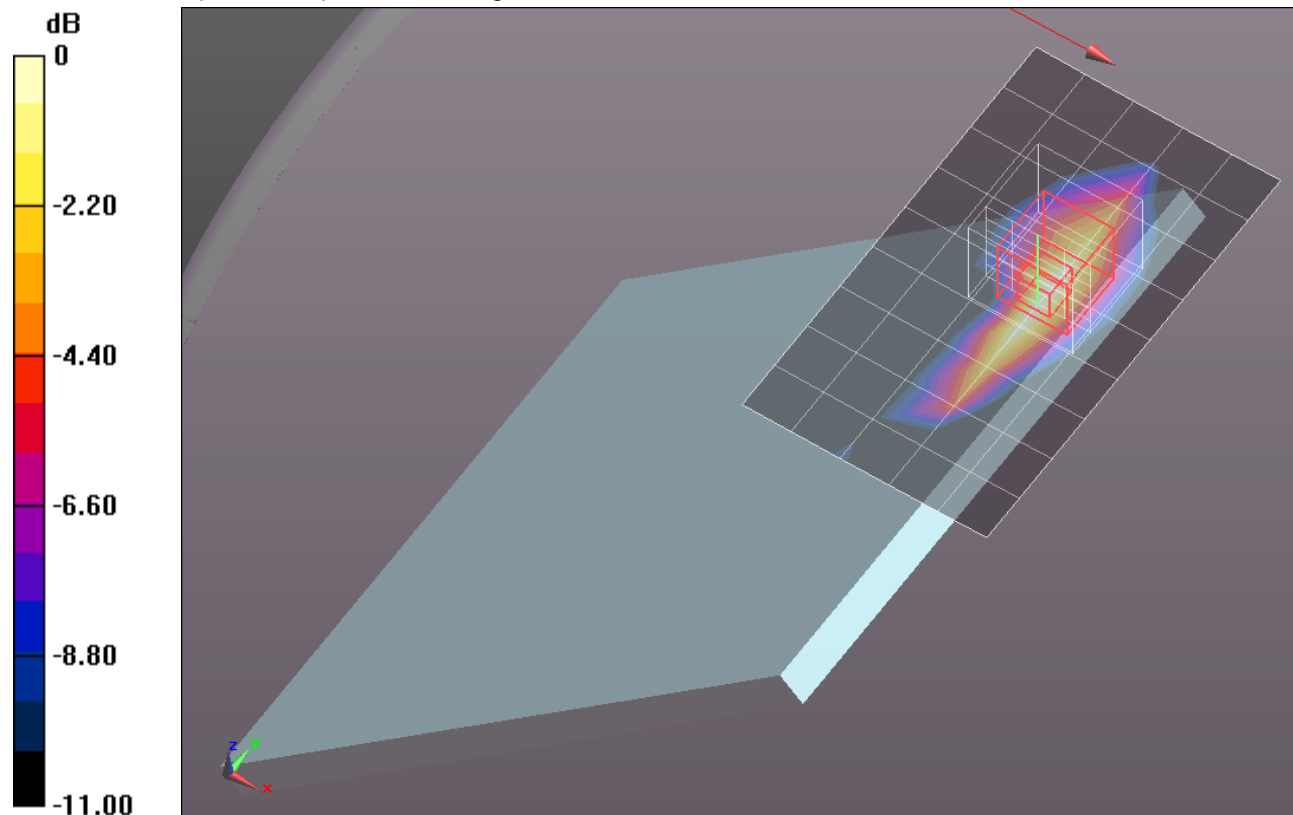

0 dB = 1.160mW/g = 1.29 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.015$ mho/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Rear with 12mm/1xEVDO_Rev.B_3 Carrier Mini_ch 384/Area Scan (10x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.423 mW/g

Rear with 12mm/1xEVDO_Rev.B_3 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.927 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.5500

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.223 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.447 mW/g

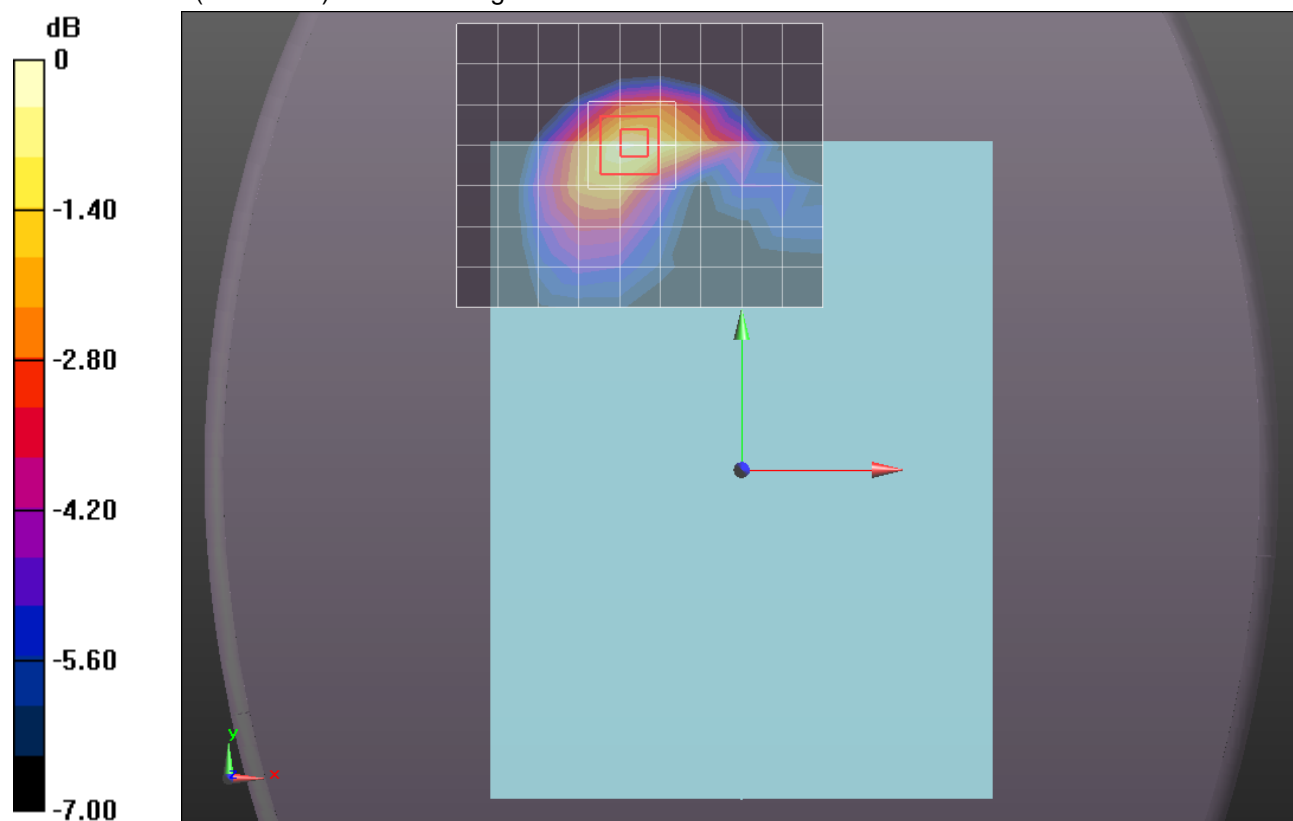

0 dB = 0.450mW/g = -6.94 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.015$ mho/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 1 with 14mm/1xEVDO_Rev.B_3 Carrier Mini_ch 384/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.311 mW/g

Edge 1 with 14mm/1xEVDO_Rev.B_3 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.448 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.3730

SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.164 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.322 mW/g

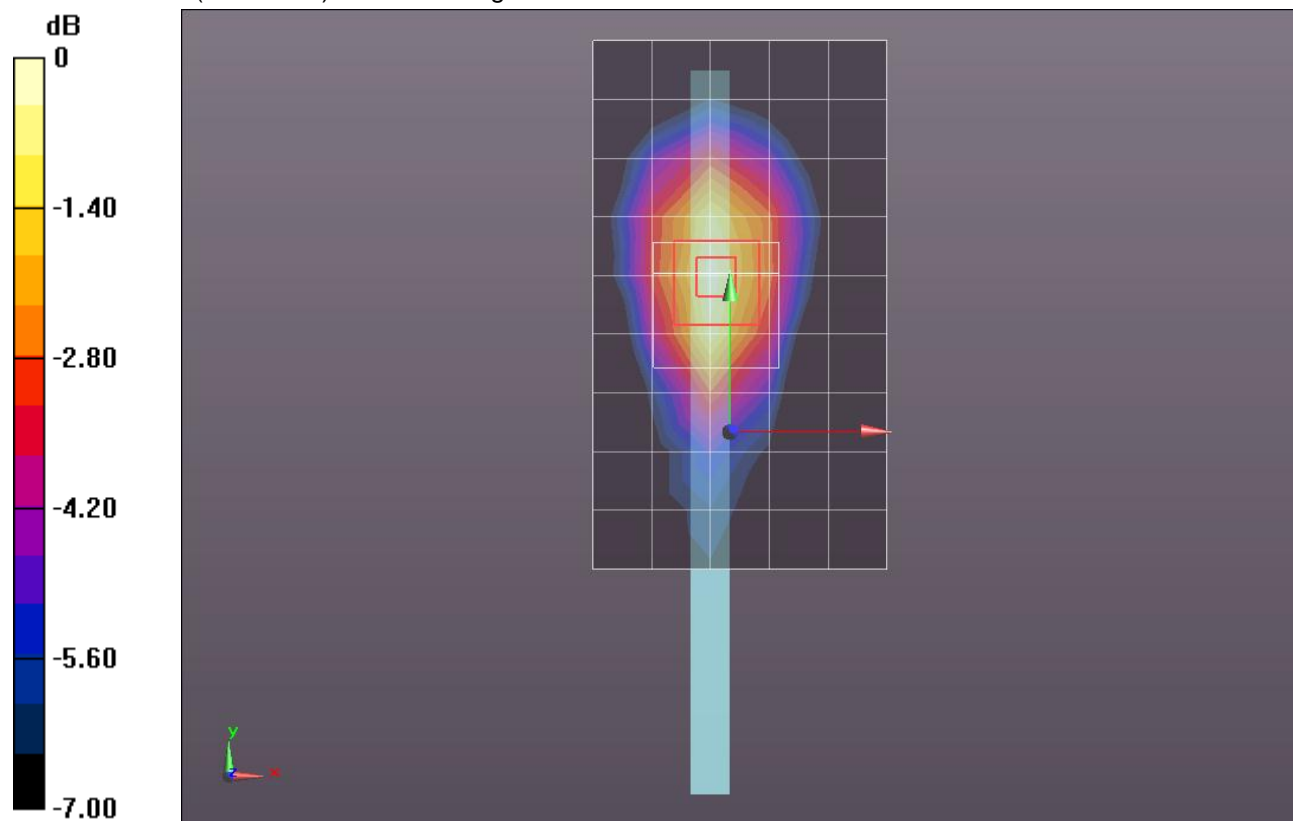

0 dB = 0.320mW/g = -9.90 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.015$ mho/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

27 deg Right Tilt @ Edge 1/1xEVDO_Rev.B_3 Carrier Mini_ch 384 2/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.069 mW/g

27 deg Right Tilt @ Edge 1/1xEVDO_Rev.B_3 Carrier Mini_ch 384 2/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.743 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.1660

SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.045 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.123 mW/g

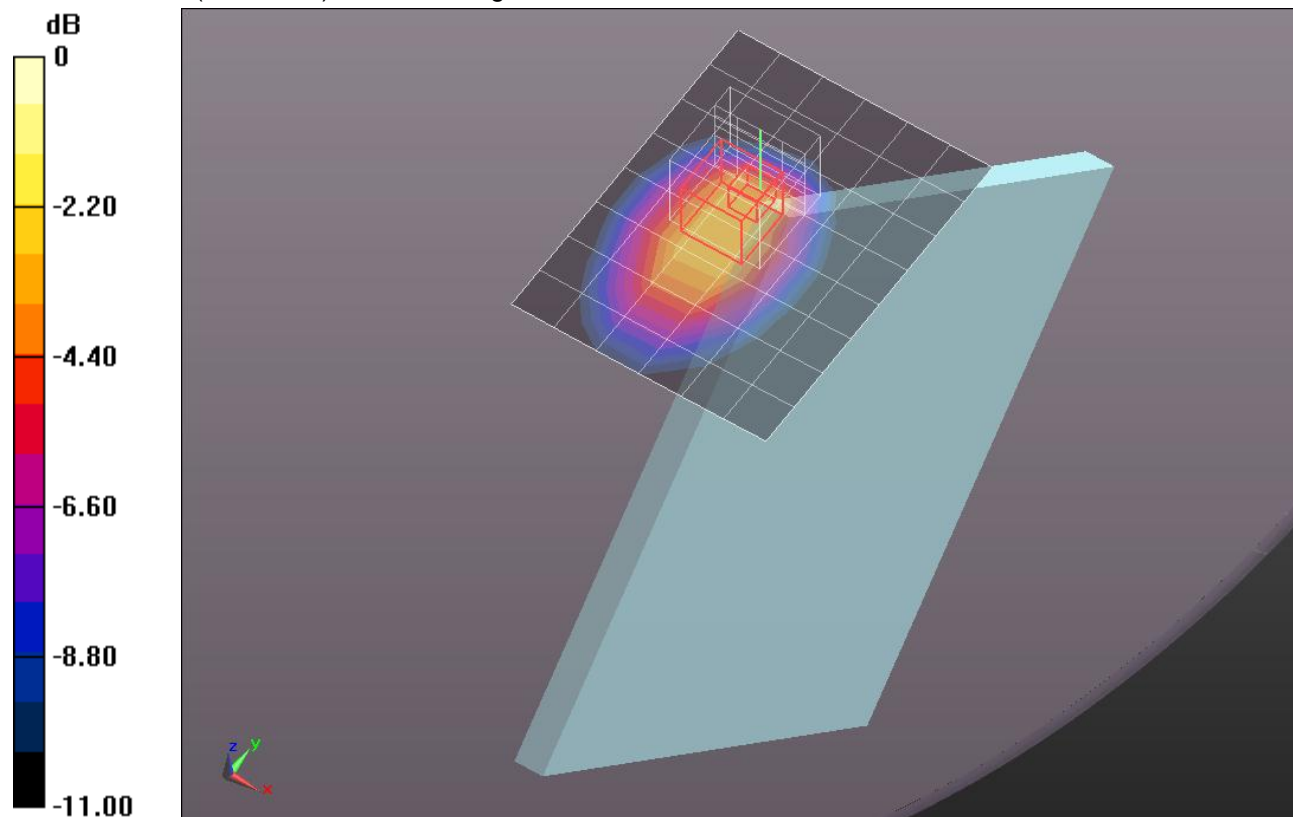

0 dB = 0.120mW/g = -18.42 dB mW/g

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 1.015$ mho/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1261; Calibrated: 3/9/2012
- Probe: EX3DV4 - SN3757; ConvF(9, 9, 9); Calibrated: 3/24/2012
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Back ELI v5.0; Type: QDOVA002AA; Serial: 1136

Edge 2/1xEVDO_Rev.B_3 Carrier Mini_ch 384/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.045 mW/g

Edge 2/1xEVDO_Rev.B_3 Carrier Mini_ch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.267 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.1300

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.027 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.093 mW/g

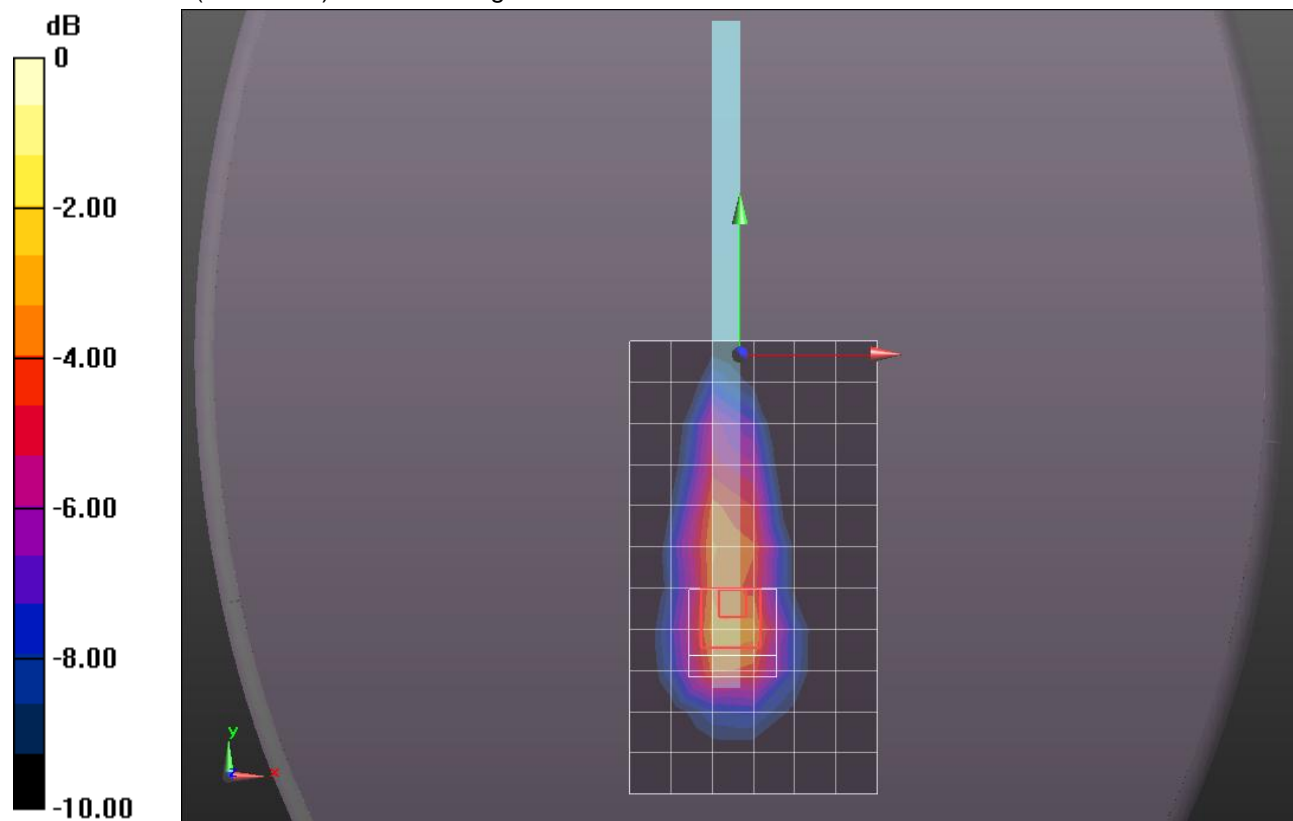

0 dB = 0.090mW/g = -20.92 dB mW/g