



**DATA**



Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.796	48.1	PK-U	34.1	-29.5		52.7	-	-	74	-21.3	-	-	277	250	H
* 4.796	42.66	ADR	34.1	-29.5	.12	47.26	54	-6.74	-	-	-	-	277	250	H
* 4.796	47.17	PK-U	34.1	-29.5		51.77	-	-	74	-22.23	-	-	5	381	V
* 4.796	41.02	ADR	34.1	-29.5	.12	45.62	54	-8.38	-	-	-	-	5	381	V
5.901	46.14	PK-U	34.9	-20.3		60.74	-	-	-	-	68.2	-7.46	237	200	V
5.912	46.99	PK-U	35	-20.3		61.69	-	-	-	-	68.2	-6.51	221	182	H
6.234	47.47	PK-U	35.4	-28.3		54.57	-	-	-	-	68.2	-13.63	171	116	H
6.235	47.58	PK-U	35.4	-28.3		54.68	-	-	-	-	68.2	-13.52	101	236	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS**

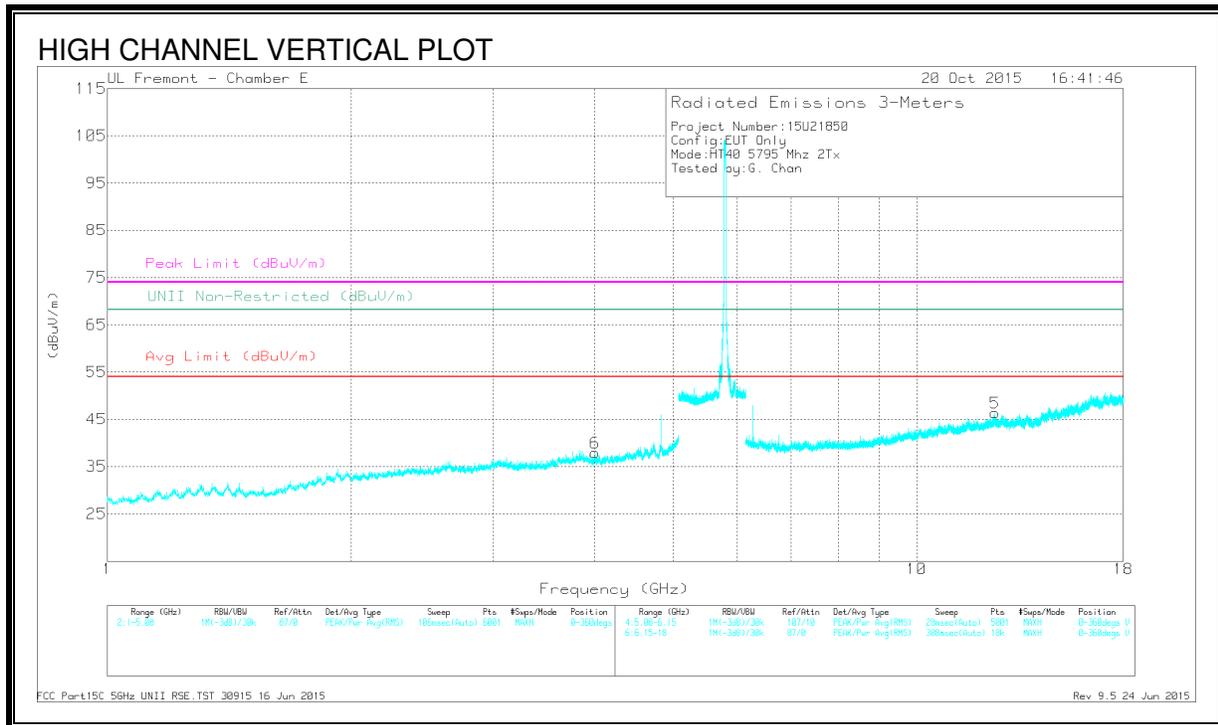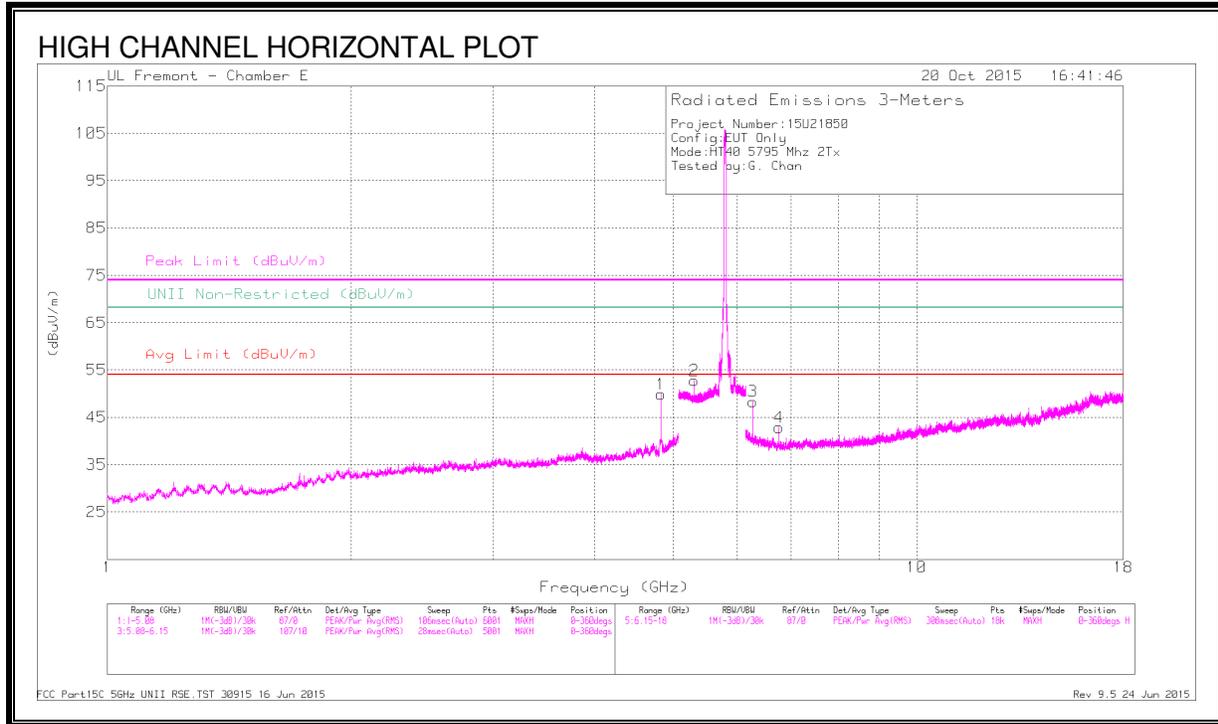

**DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.829	48.67	PK-U	34.1	-28.9		53.87	-	-	74	-20.13	-	-	279	251	H
	* 4.829	43.95	ADR	34.1	-28.9	.12	49.15	54	-4.85	-	-	-	-	279	251	H
6	* 4.007	40.71	PK-U	33.4	-29.9		44.21	-	-	74	-29.79	-	-	321	254	V
	* 4.007	29.16	ADR	33.4	-29.9	.12	32.66	54	-21.34	-	-	-	-	321	254	V
5	* 12.49	36.84	PK-U	39	-23.5		52.34	-	-	74	-21.66	-	-	54	337	V
	* 12.49	25.17	ADR	39	-23.5	.12	40.67	54	-13.33	-	-	-	-	54	337	V
2	5.312	45.27	PK-U	34.5	-20.5		59.27	-	-	-	-	68.2	-8.93	179	208	H
	5.312	36.99	ADR	34.5	-20.5		50.99	-	-	-	-	-	-	179	208	H
3	6.278	45.56	PK-U	35.4	-28.4		52.56	-	-	-	-	68.2	-15.64	173	101	H
	6.278	39.97	ADR	35.4	-28.4		46.97	-	-	-	-	-	-	173	101	H
4	6.761	41.51	PK-U	35.6	-28.3		48.81	-	-	-	-	68.2	-19.39	316	196	H
	6.761	33.8	ADR	35.6	-28.3		41.1	-	-	-	-	-	-	316	196	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


**RESTRICTED BANDEDGE CHAIN 1 + 2 (LOW CHANNEL)**

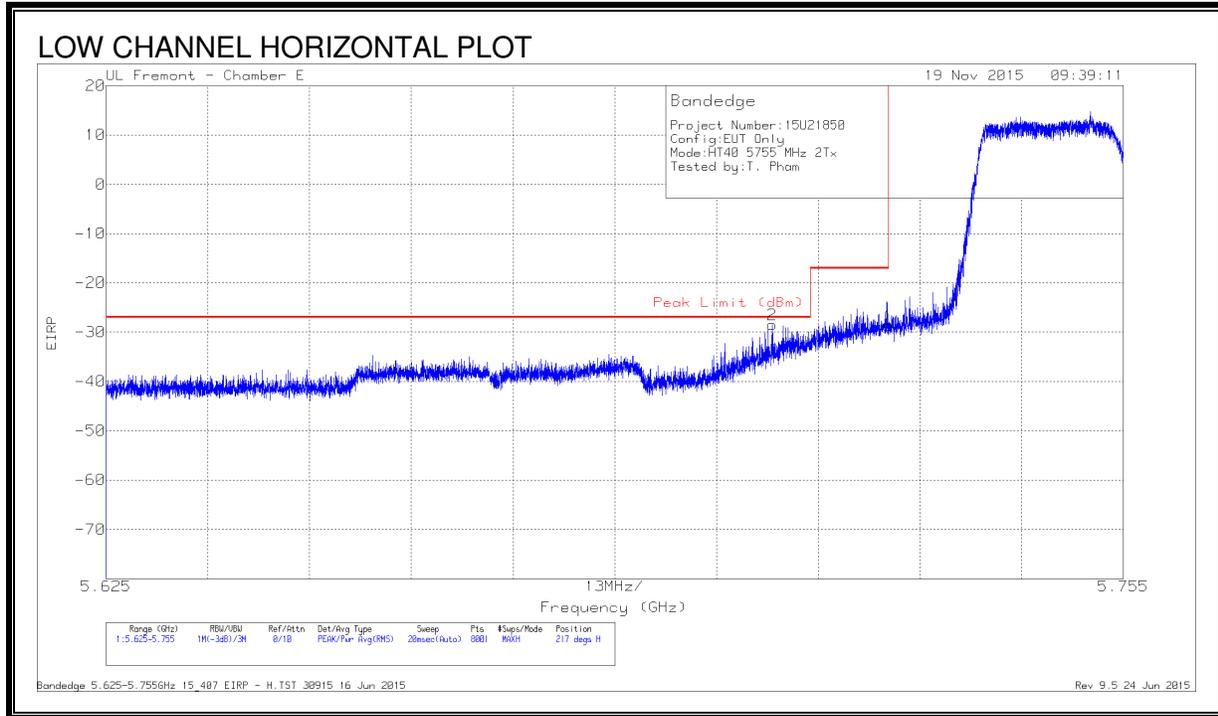

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.71	-54.84	Pk	34.7	-20.1	11.8	-28.44	-27	-1.44	217	139	H
1	5.725	-55.06	Pk	34.7	-20.1	11.8	-28.66	-17	-11.66	217	139	H

Pk - Peak detector

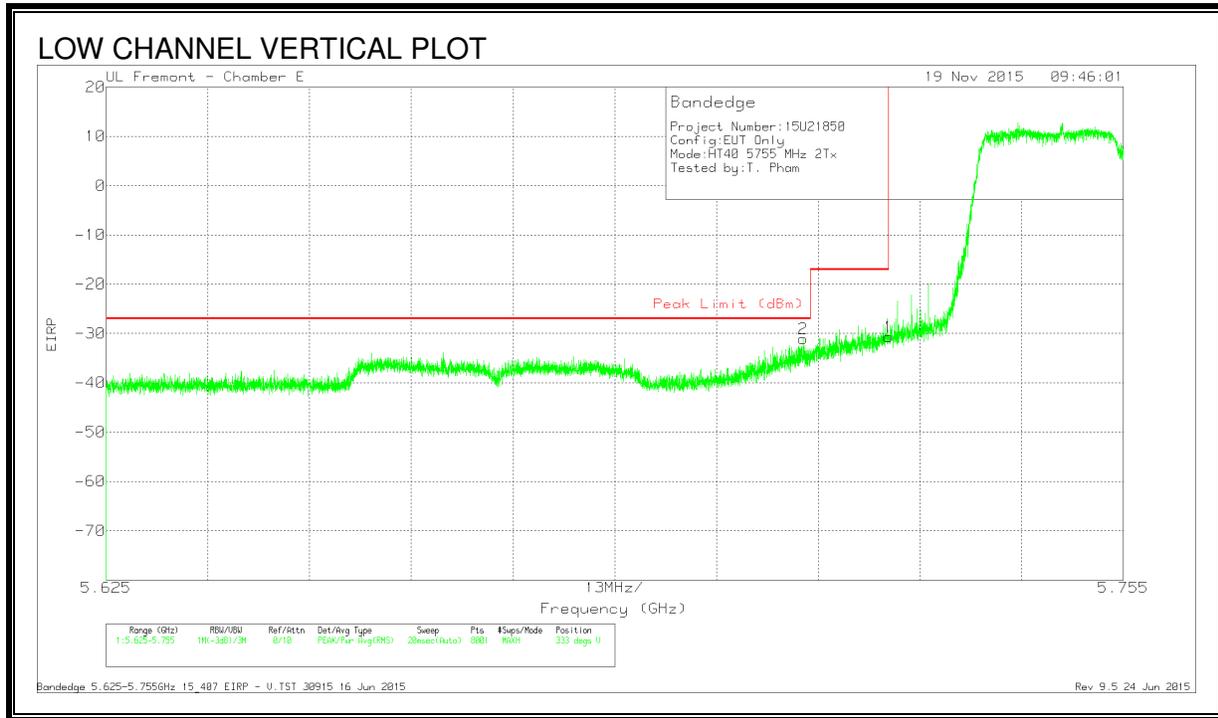


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.714	-57.49	Pk	34.7	-20.1	11.8	-31.09	-27	-4.09	333	171	V
1	5.725	-57.1	Pk	34.7	-20.1	11.8	-30.7	-17	-13.7	333	171	V

Pk - Peak detector


**RESTRICTED BANDEDGE CHAIN 1 + 2 (HIGH CHANNEL)**

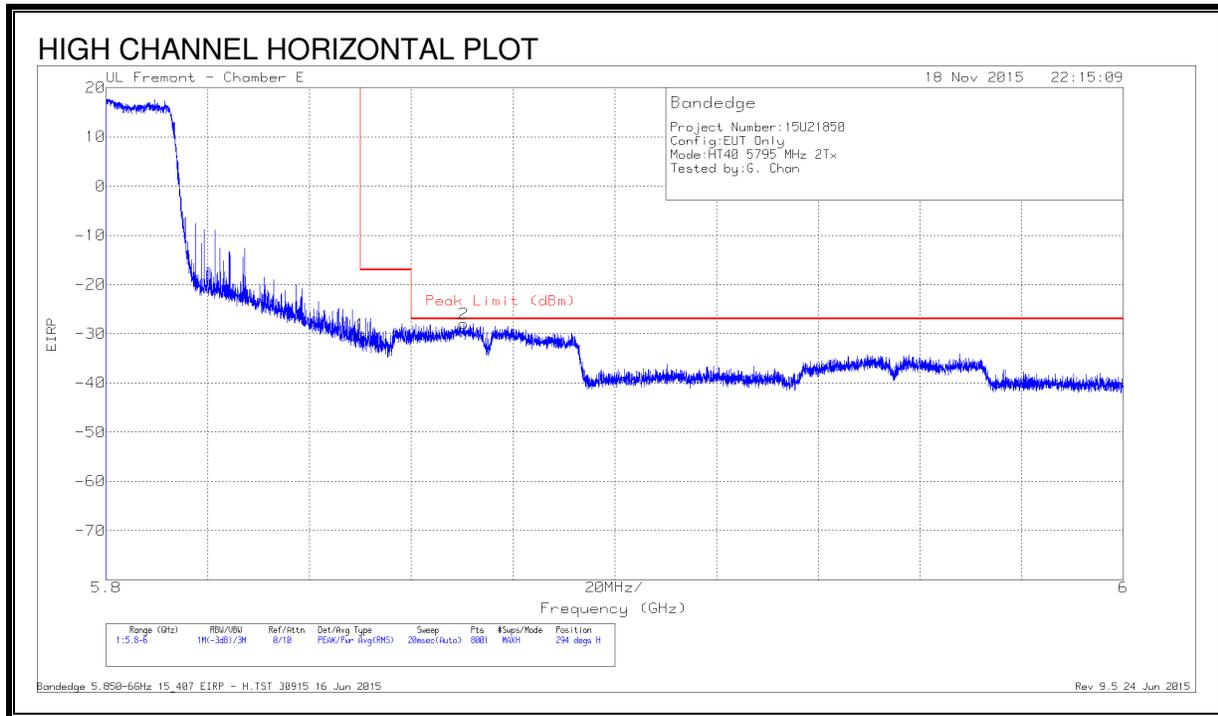

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.75	Pk	34.9	-20	11.8	-30.05	-17	-13.05	294	166	H
2	5.87	-54.93	Pk	34.9	-19.7	11.8	-27.93	-27	-93	294	166	H

Pk - Peak detector


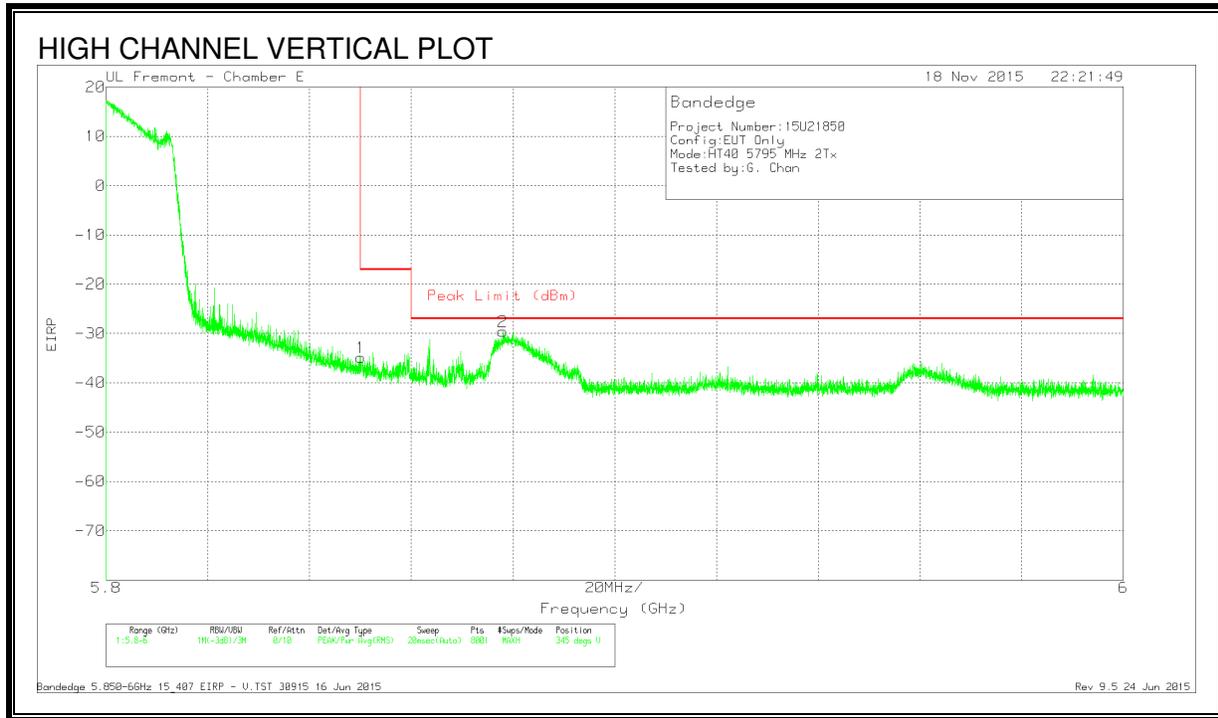


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.58	Pk	34.9	-20	11.8	-34.88	-17	-17.88	345	166	V
2	5.878	-56.48	Pk	34.9	-19.8	11.8	-29.58	-27	-2.58	345	166	V

Pk - Peak detector

**LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS**

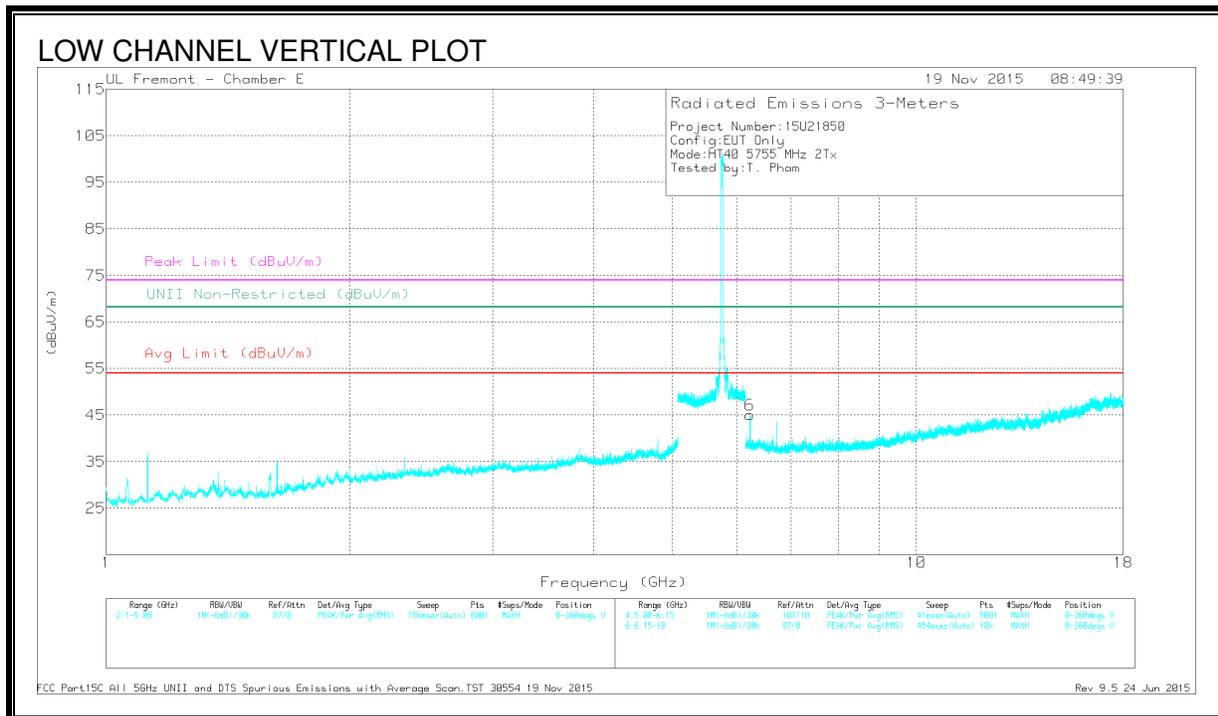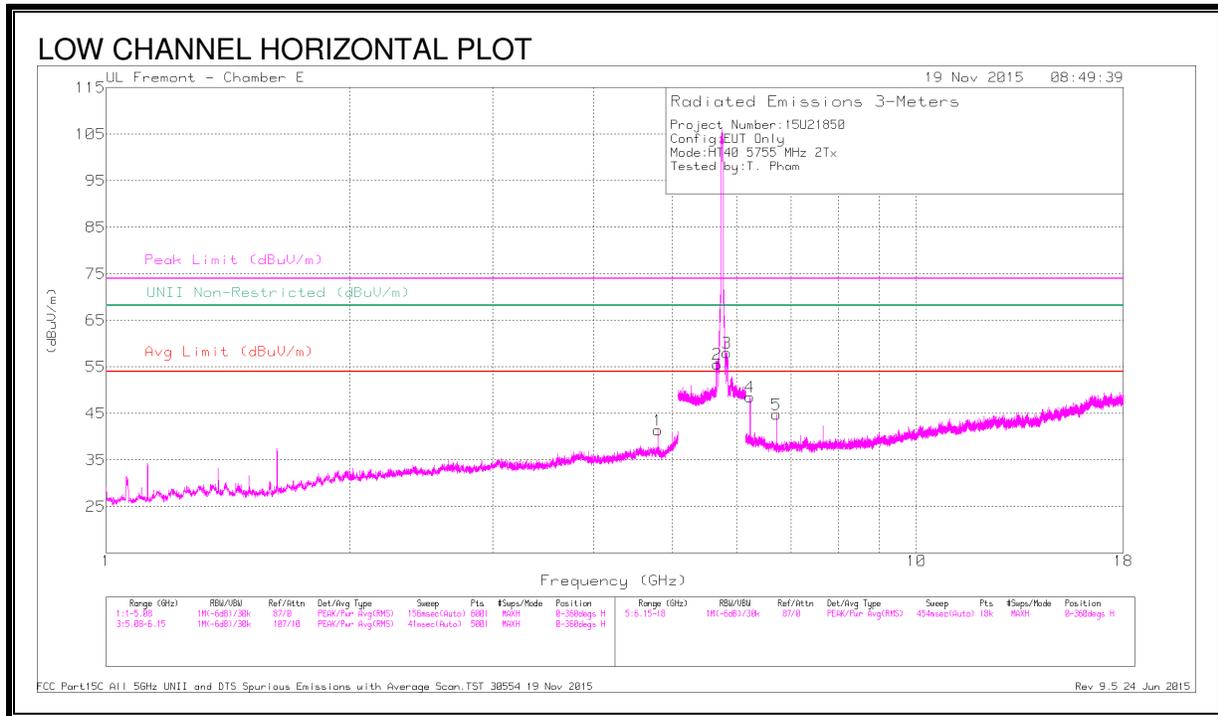

**DATA**



Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.796	45.04	PK-U	34.1	-29.5		49.64	-	-	74	-24.36	-	-	301	371	H
* 4.796	37.42	ADR	34.1	-29.5	.12	42.02	54	-11.98	-	-	-	-	301	371	H
5.689	52.1	PK-U	34.6	-20.2		66.5	-	-	-	-	68.2	-1.7	310	261	H
5.839	52.04	PK-U	34.9	-20.3		66.64	-	-	-	-	68.2	-1.56	297	205	H
6.235	45.16	PK-U	35.4	-28.3		52.26	-	-	-	-	68.2	-15.94	289	151	H
6.714	43.04	PK-U	35.6	-28.4		50.24	-	-	-	-	68.2	-17.96	295	157	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS**

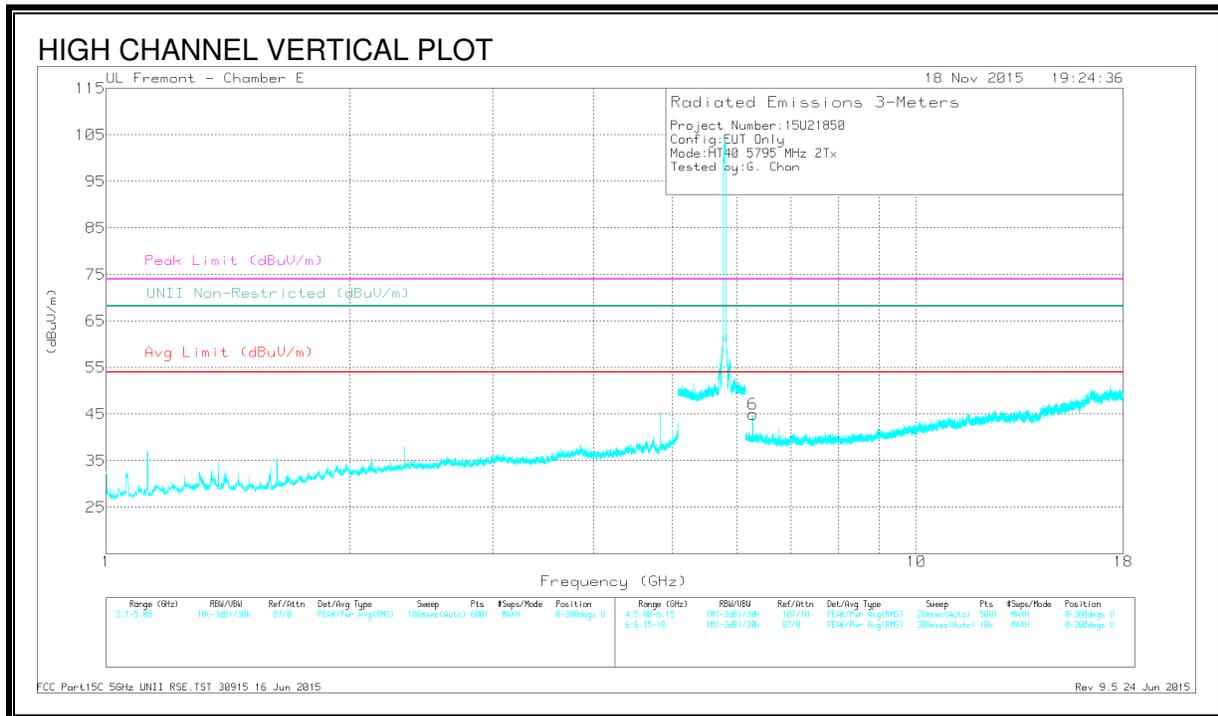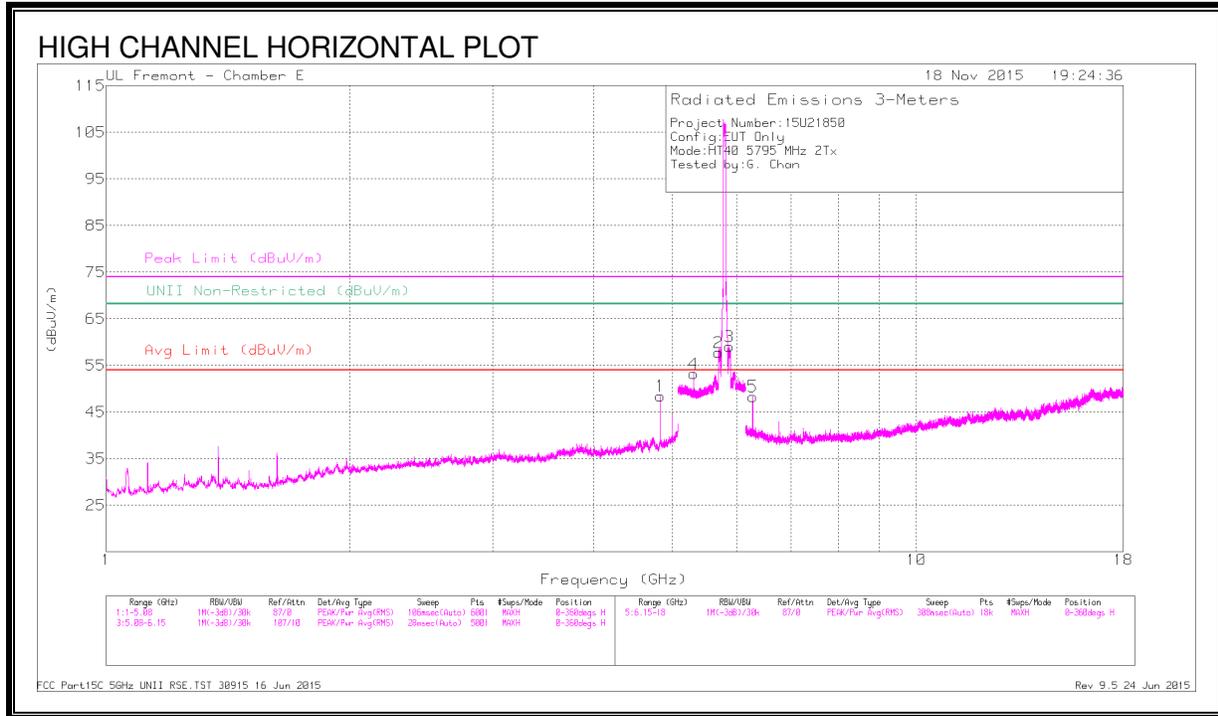

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.829	47	PK-U	34.1	-28.9		52.2	-	-	74	-21.8	-	-	292	271	H
	* 4.829	42.75	ADR	34.1	-28.9	.12	47.95	54	-6.05	-	-	-	-	292	271	H
4	5.312	45.78	PK-U	34.5	-20.5		59.78	-	-	-	-	68.2	-8.42	319	229	H
1	5.698	51.8	PK-U	34.7	-20.1		66.4	-	-	-	-	68.2	-1.8	268	117	H
3	5.872	52.29	PK-U	34.9	-20.4		66.79	-	-	-	-	68.2	-1.41	303	214	H
5	6.278	46.96	PK-U	35.4	-28.4		53.96	-	-	-	-	68.2	-14.24	276	263	H
6	6.278	44.08	PK-U	35.4	-28.4		51.08	-	-	-	-	68.2	-17.12	339	160	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 9.11. 802.11n HT40 3TX CDD MODE IN THE 5.8 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL)

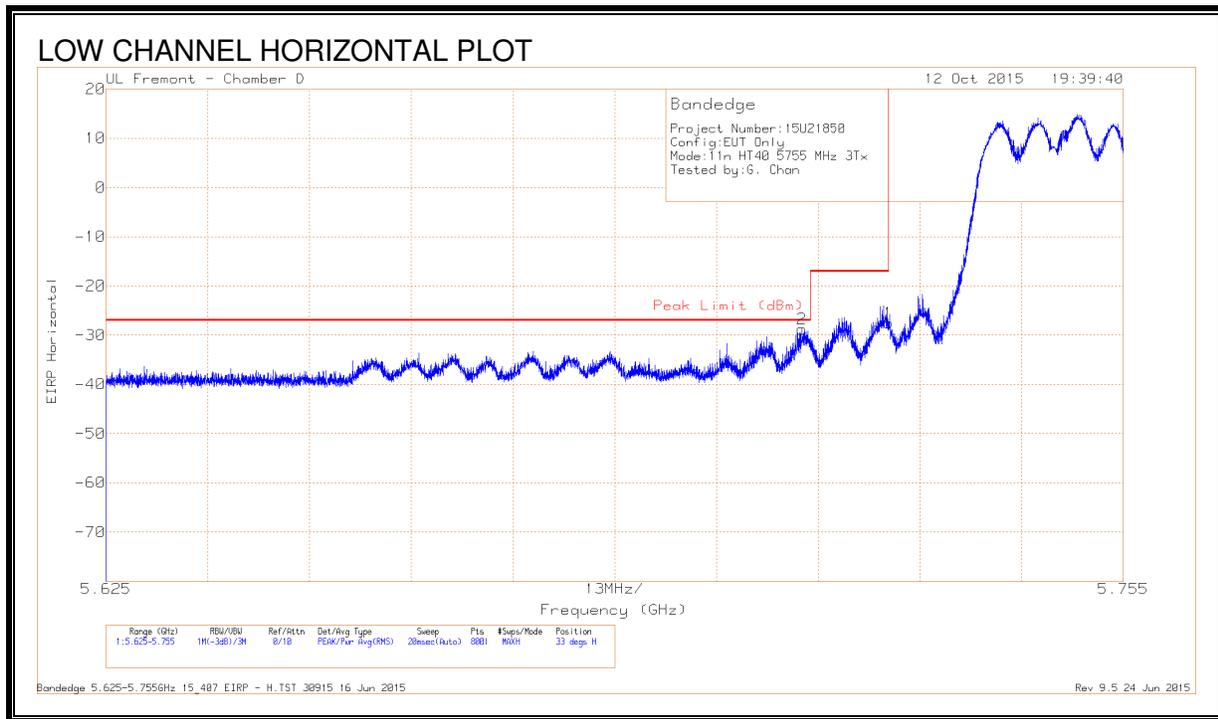

#### DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.714	-57.68	Pk	34.6	-17.5	11.8	-28.78	-27	-1.78	33	190	H
1	5.725	-56.25	Pk	34.6	-17.6	11.8	-27.45	-17	-10.45	33	190	H

Pk - Peak detector

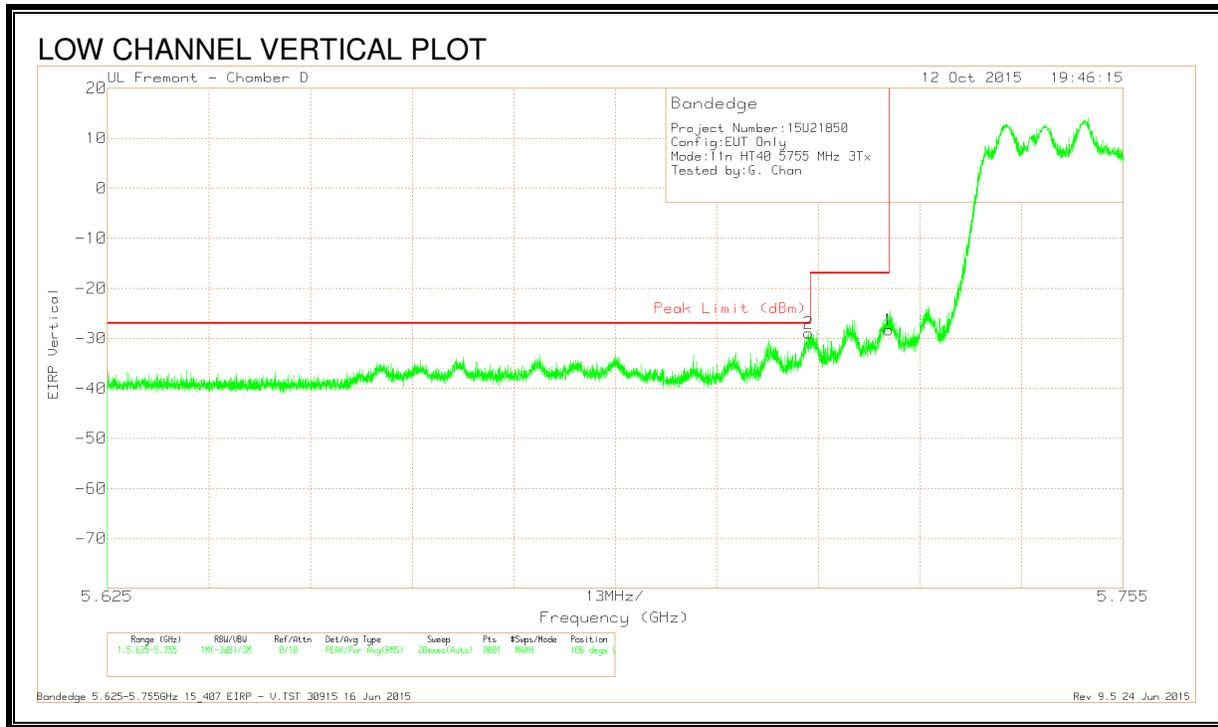


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.715	-57.82	Pk	34.6	-17.5	11.8	-28.92	-27	-1.92	106	230	V
1	5.725	-57.08	Pk	34.6	-17.6	11.8	-28.28	-17	-11.28	106	230	V

Pk - Peak detector


**RESTRICTED BANDEDGE (HIGH CHANNEL)**

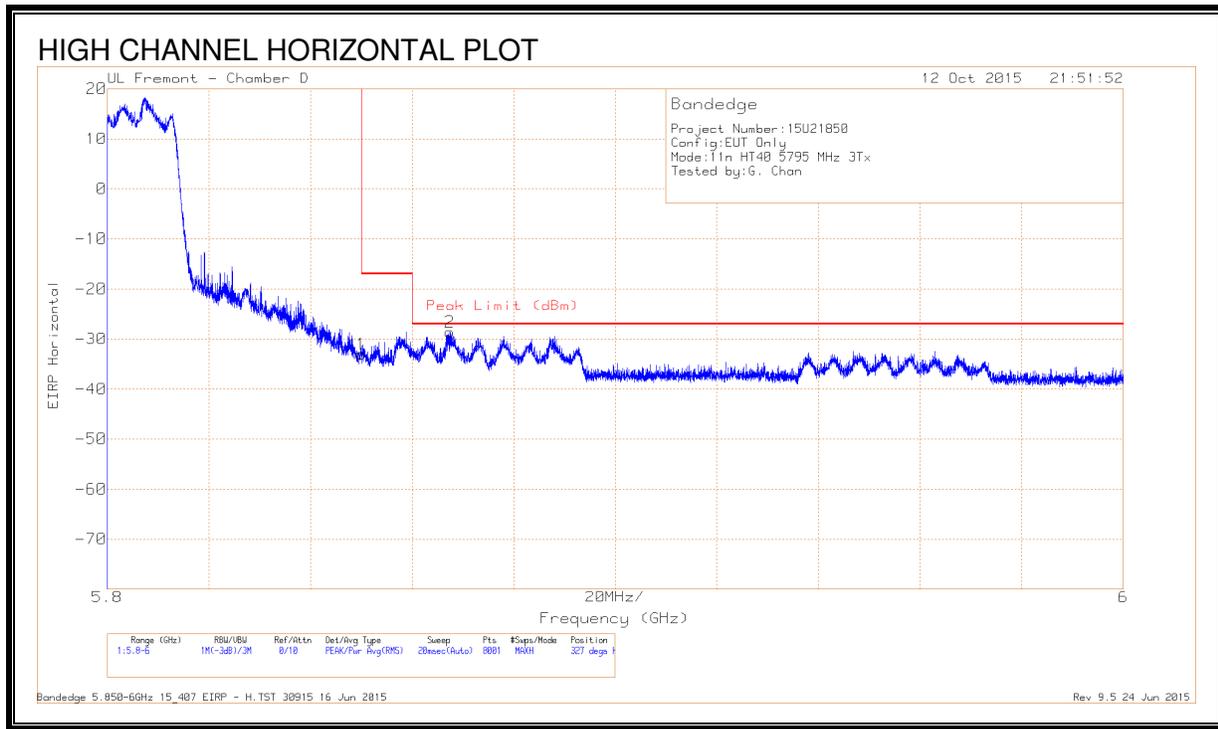

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.05	Pk	34.9	-17.7	11.8	-33.05	-17	-16.05	327	132	H
2	5.867	-57.79	Pk	35	-17.6	11.8	-28.59	-27	-1.59	327	132	H

Pk - Peak detector


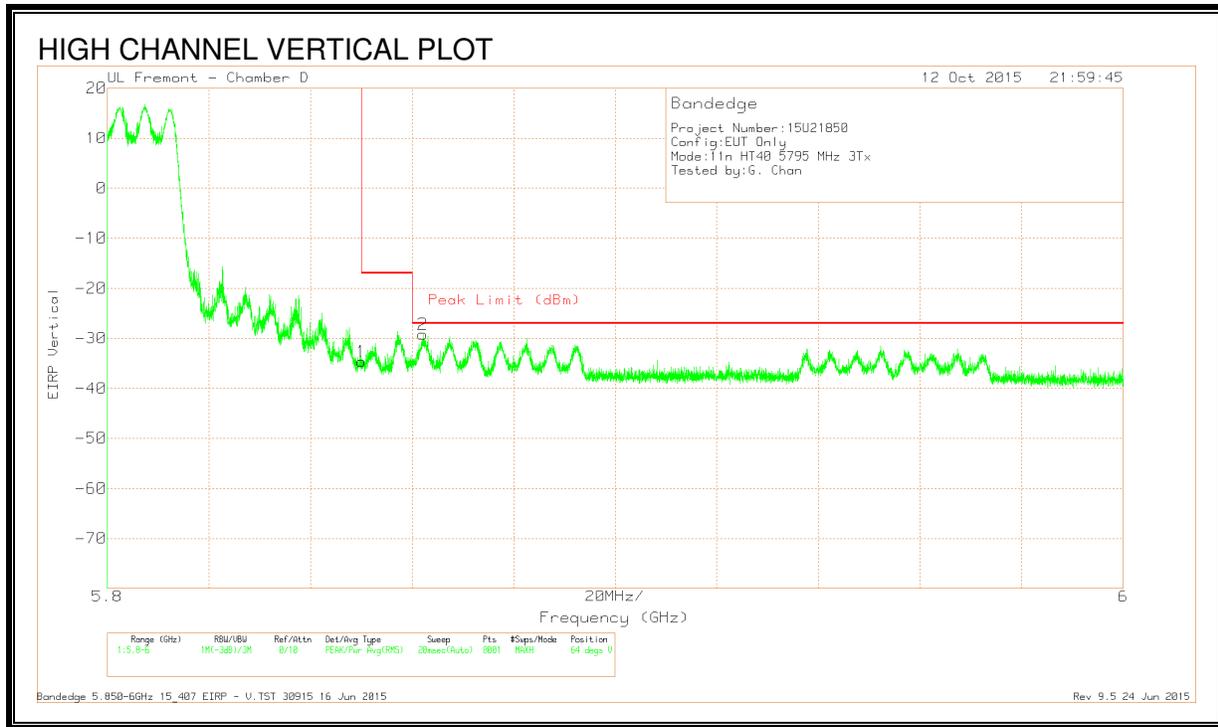


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.6	Pk	34.9	-17.7	11.8	-34.6	-17	-17.6	64	162	V
2	5.862	-58.39	Pk	35	-17.6	11.8	-29.19	-27	-2.19	64	162	V

Pk - Peak detector

**LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS**

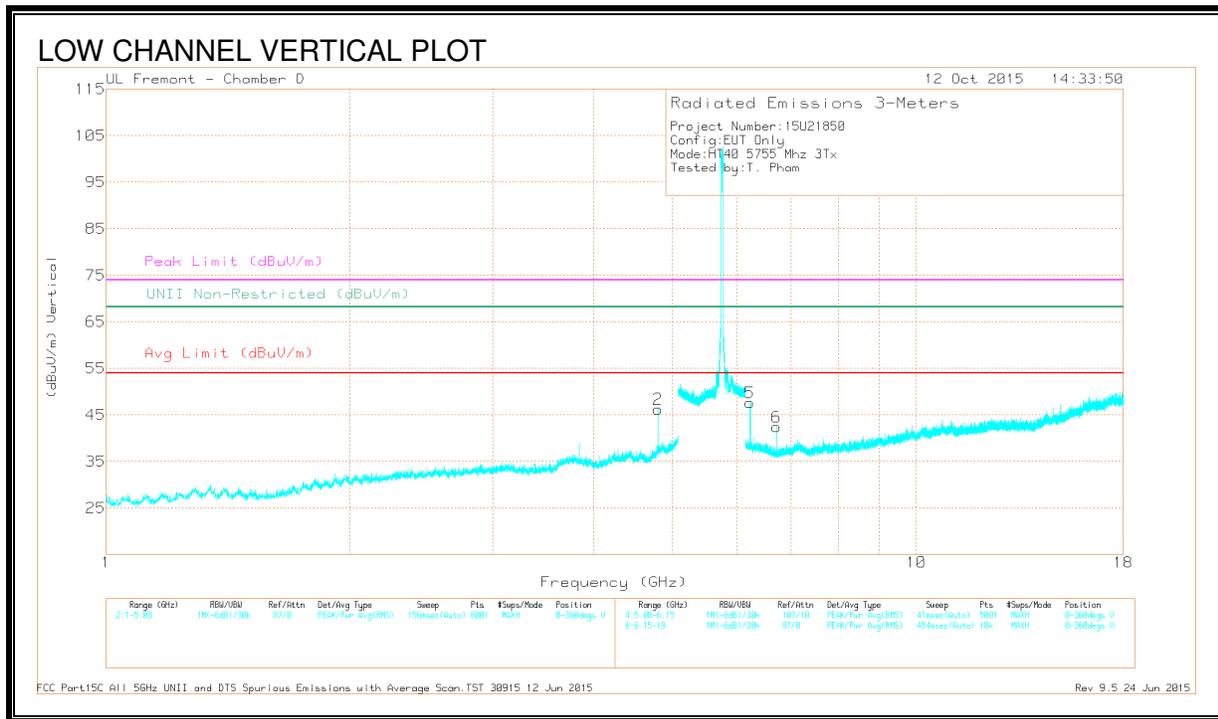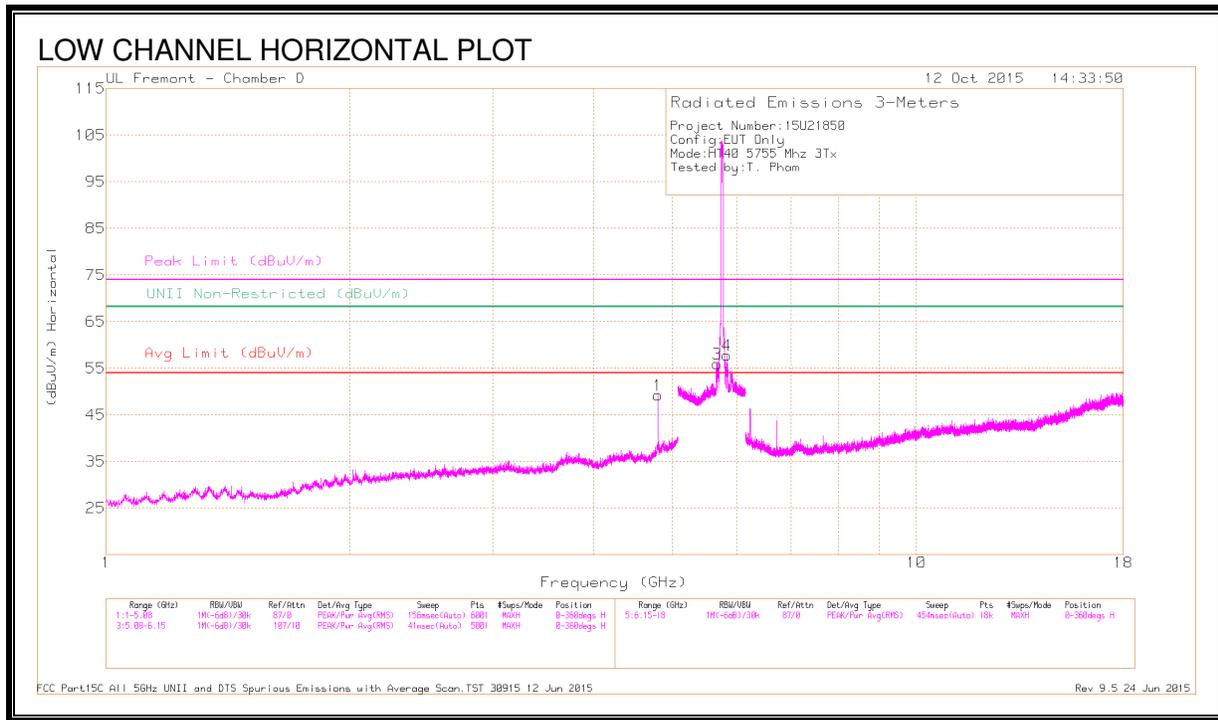

**DATA**



Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.796	46.93	PK-U	34.1	-27.7	53.33	-	-	74	-20.67	-	-	13	295	H
	* 4.796	42.93	ADR	34.1	-27.7	49.33	54	-4.67	-	-	-	-	13	295	H
2	* 4.796	44.09	PK-U	34.1	-27.7	50.49	-	-	74	-23.51	-	-	88	149	V
	* 4.796	38.26	ADR	34.1	-27.7	44.66	54	-9.34	-	-	-	-	88	149	V
3	5.693	47.38	PK-U	34.5	-17.3	64.58	-	-	-	-	68.2	-3.62	72	107	H
4	5.837	47.68	PK-U	34.9	-17.7	64.88	-	-	-	-	68.2	-3.32	39	208	H
5	6.235	44.13	PK-U	35.4	-26.7	52.83	-	-	-	-	68.2	-15.37	324	264	V
6	6.714	40.2	PK-U	35.5	-26.6	49.1	-	-	-	-	68.2	-19.1	88	105	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS**

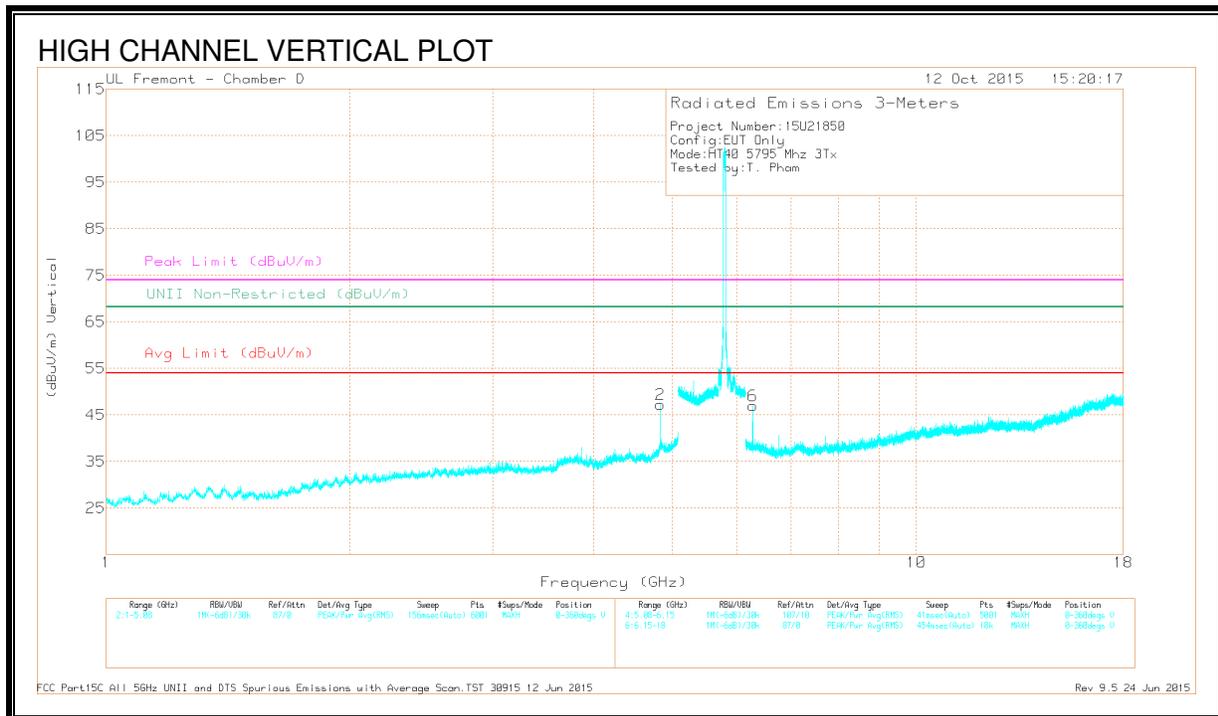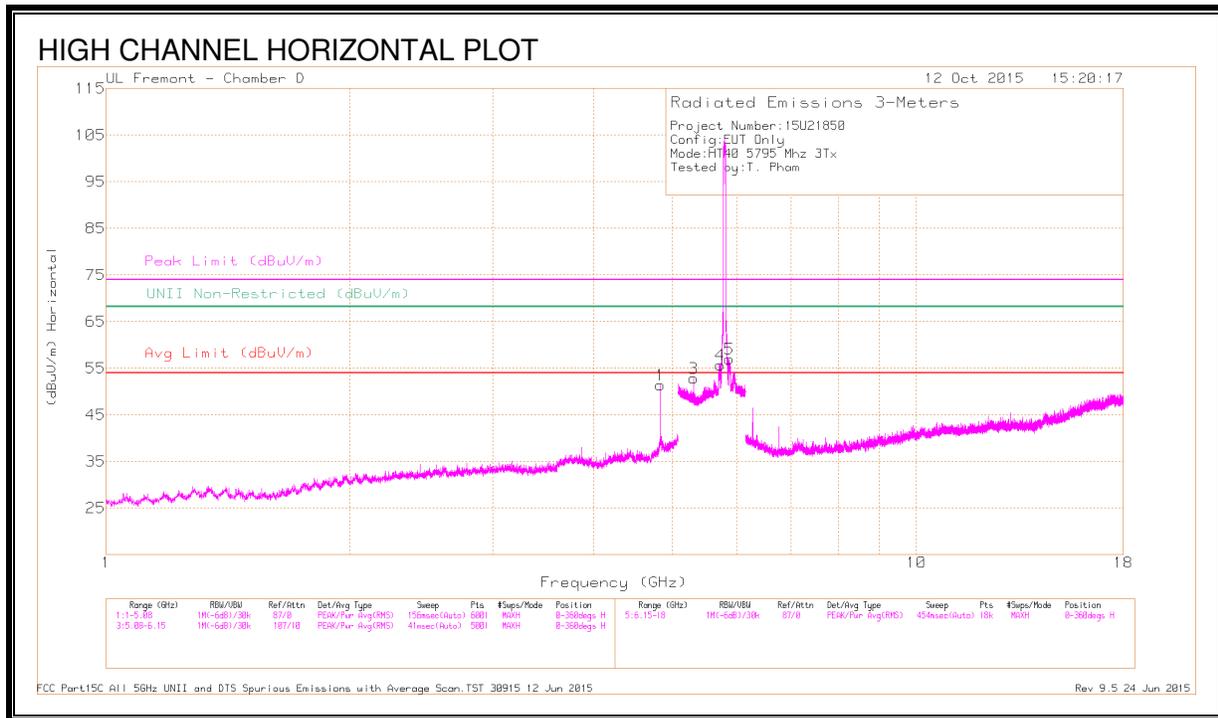

**DATA**

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.829	47.96	PK-U	34.1	-26.8	55.26	-	-	74	-18.74	-	-	13	293	H
	* 4.829	43.65	ADR	34.1	-26.8	50.95	54	-3.05	-	-	-	-	13	293	H
2	* 4.829	44.25	PK-U	34.1	-26.8	51.55	-	-	74	-22.45	-	-	91	171	V
	* 4.829	38.84	ADR	34.1	-26.8	46.14	54	-7.86	-	-	-	-	91	171	V
3	5.312	43.42	PK-U	34.3	-18.2	59.52	-	-	-	-	68.2	-8.68	4	271	H
4	5.743	48.44	PK-U	34.6	-17.6	65.44	-	-	-	-	68.2	-2.76	74	131	H
5	5.863	48.38	PK-U	35	-17.6	65.78	-	-	-	-	68.2	-2.42	74	131	H
6	6.278	43.62	PK-U	35.4	-26.3	52.72	-	-	-	-	68.2	-15.48	326	275	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 9.12. 802.11n HT40 3TX BF MODE IN THE 5.8 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL)

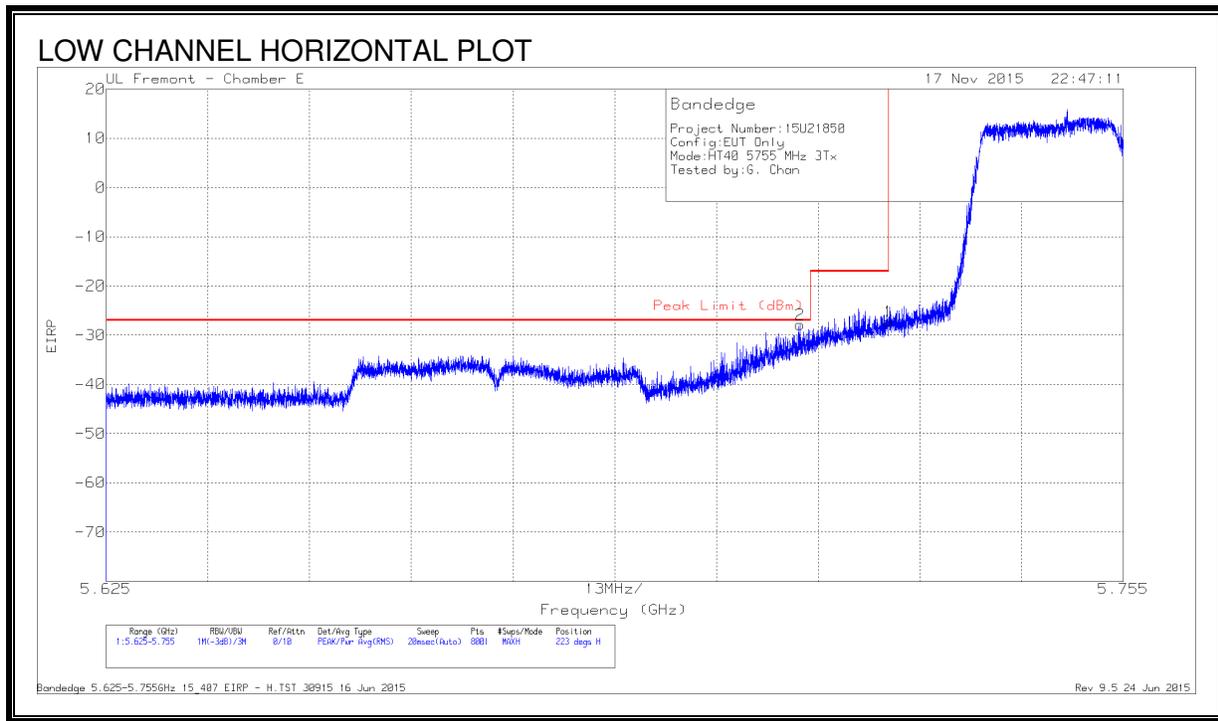

#### DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.714	-54.61	Pk	34.7	-19.8	11.8	-27.91	-27	-.91	223	131	H
1	5.725	-53.97	Pk	34.7	-19.8	11.8	-27.27	-17	-10.27	223	131	H

Pk - Peak detector

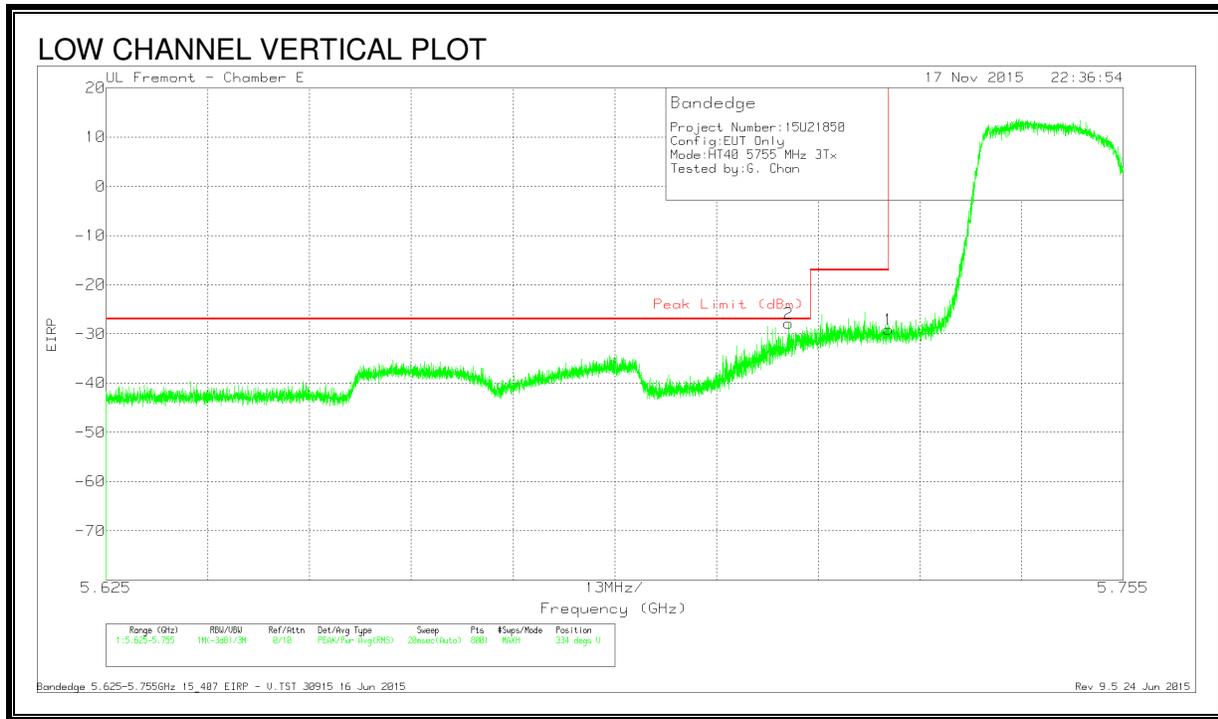


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.712	-54.59	Pk	34.7	-19.8	11.8	-27.89	-27	-.89	334	132	V
1	5.725	-55.75	Pk	34.7	-19.8	11.8	-29.05	-17	-12.05	334	132	V

Pk - Peak detector


**RESTRICTED BANDEDGE (HIGH CHANNEL)**

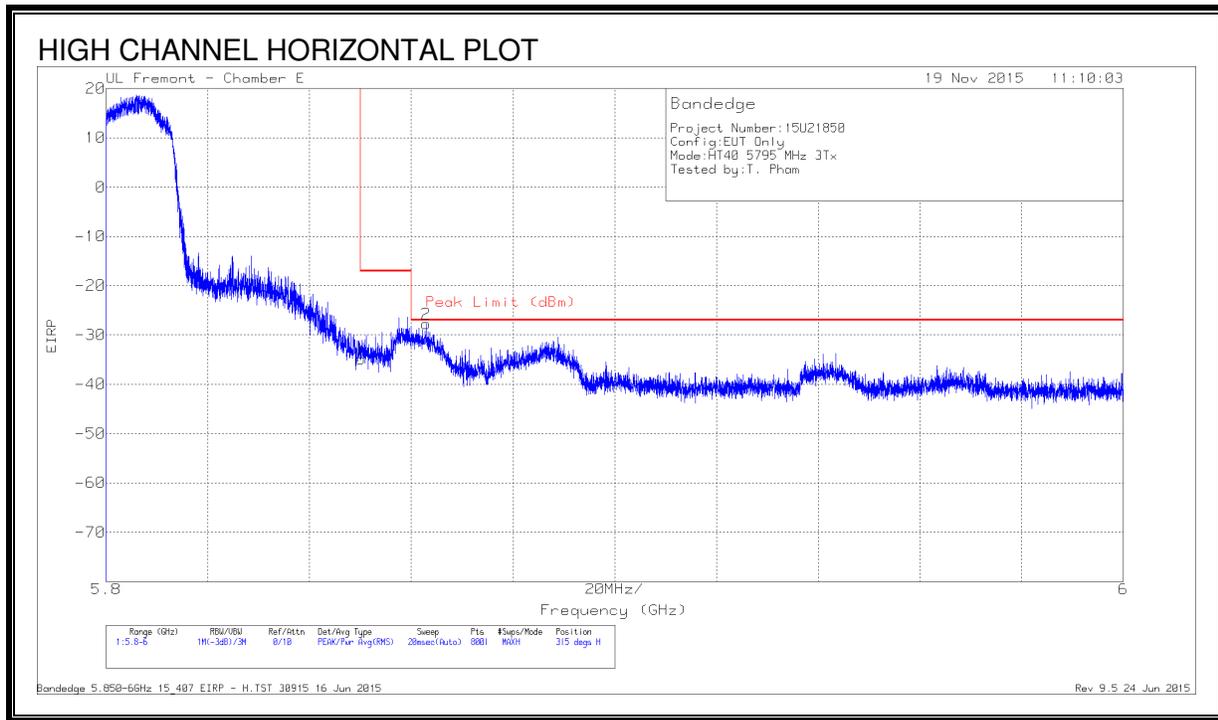

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.3	Pk	34.9	-20.3	11.8	-34.9	-17	-17.9	315	207	H
2	5.863	-54.04	Pk	34.9	-20.4	11.8	-27.74	-27	-.74	315	207	H

Pk - Peak detector


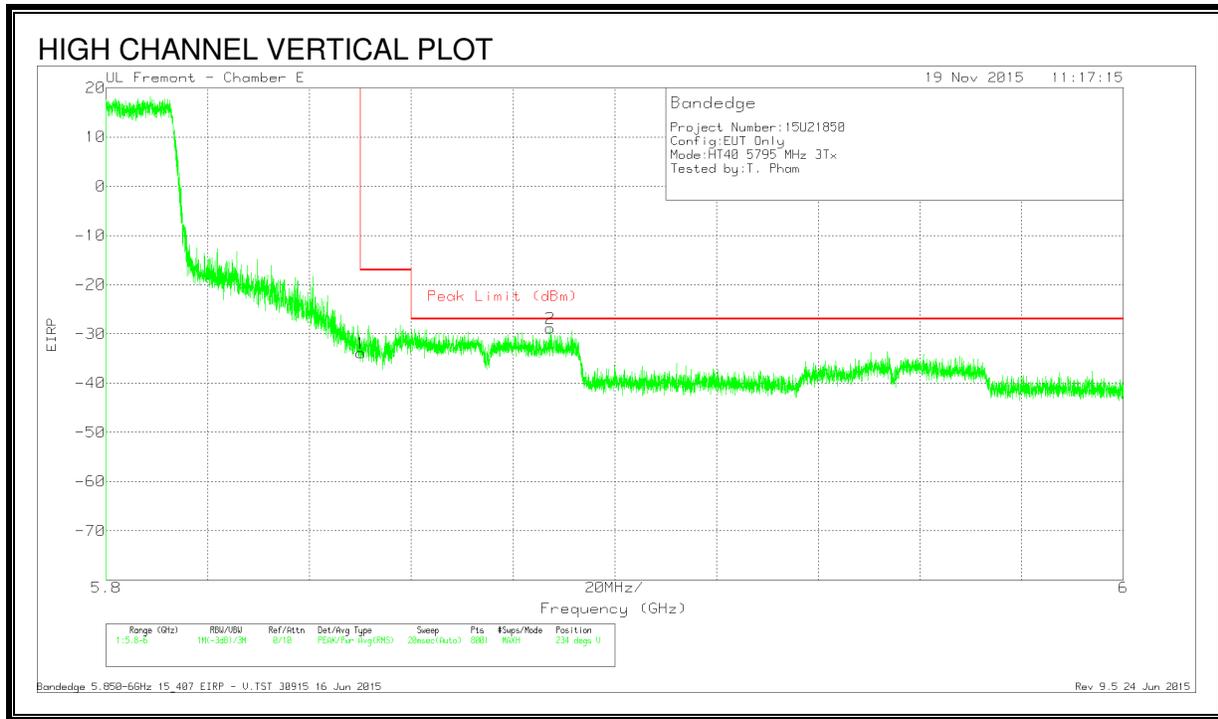


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-60.3	Pk	34.9	-20.3	11.8	-33.9	-17	-16.9	234	249	V
2	5.887	-55.16	Pk	34.9	-20.4	11.8	-28.86	-27	-1.86	234	249	V

Pk - Peak detector

**LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS**

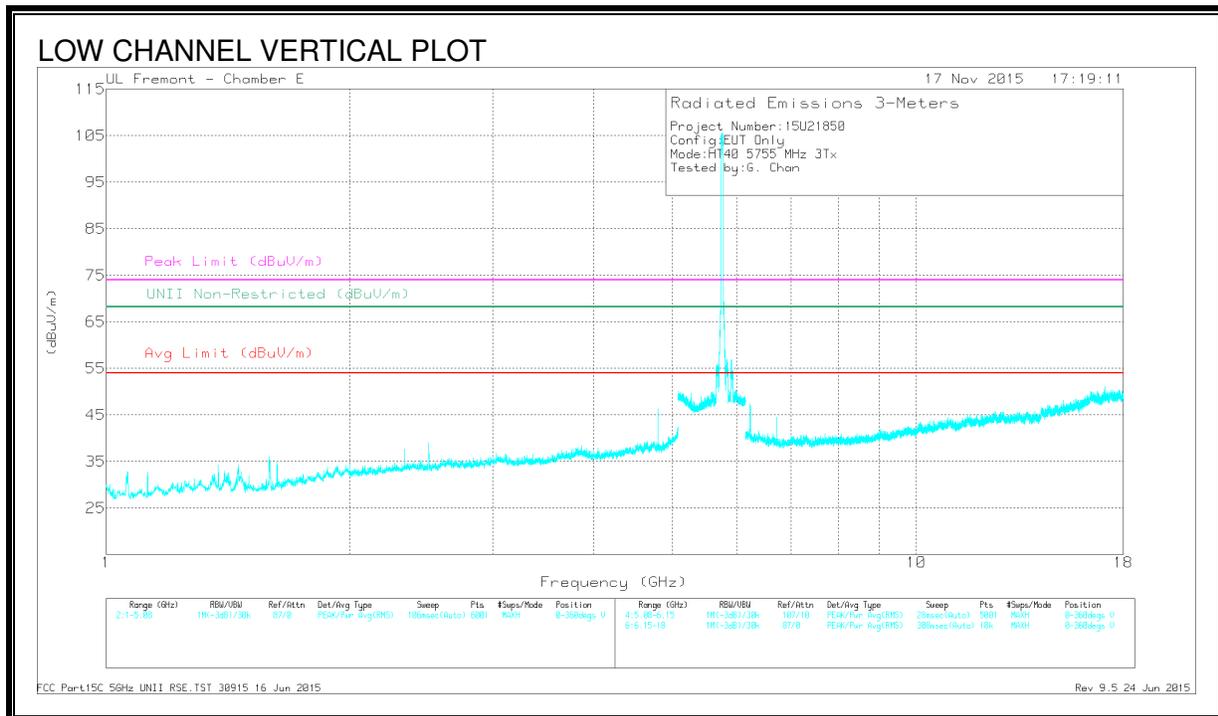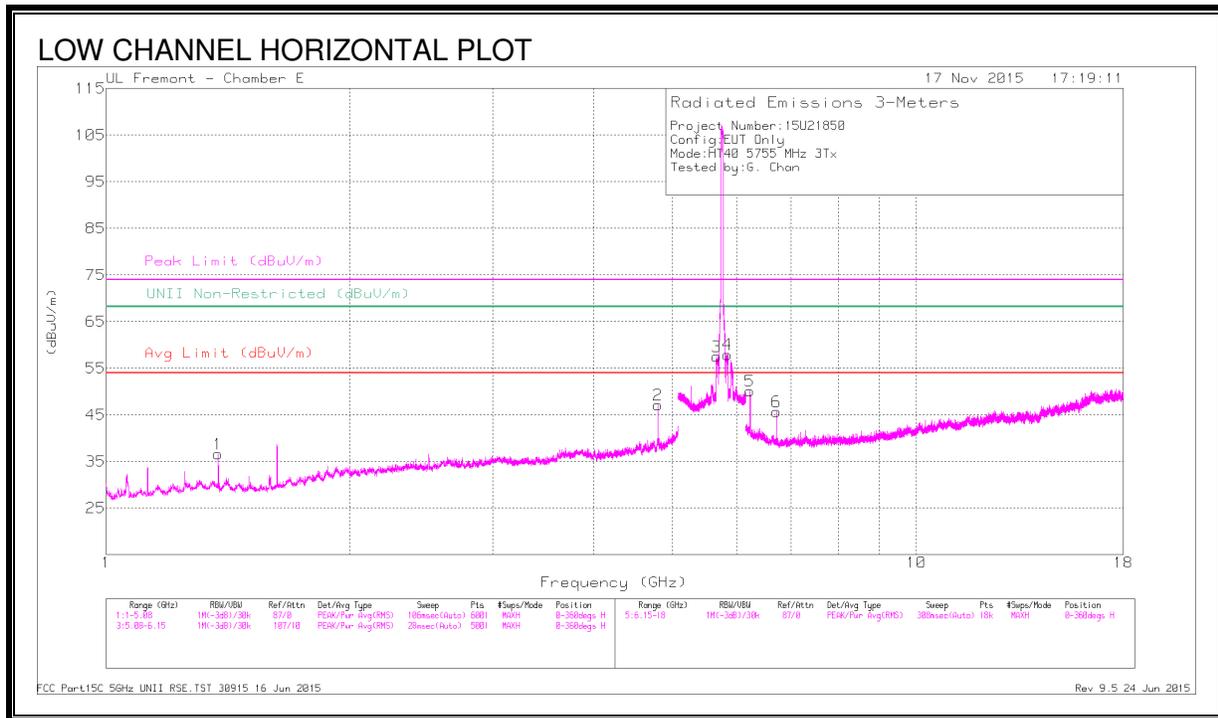

**DATA**



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.375	48.71	PK-U	28.6	-34.8		42.51	-	-	74	-31.49	-	-	353	196	H
	* 1.375	41.09	ADR	28.6	-34.8	.11	34.89	54	-19.11	-	-	-	-	353	196	H
2	* 4.796	47.88	PK-U	34.1	-29.5		52.48	-	-	74	-21.52	-	-	286	352	H
	* 4.796	43.32	ADR	34.1	-29.5	.11	47.92	54	-6.08	-	-	-	-	286	352	H
3	5.669	49.03	PK-U	34.6	-19.8		63.83	-	-	-	-	68.2	-4.37	335	122	H
	5.671	37.65	ADR	34.6	-19.8		52.45	-	-	-	-	-	-	335	122	H
4	5.852	49.61	PK-U	34.9	-19.9		64.61	-	-	-	-	68.2	-3.59	297	122	H
5	6.234	48.05	PK-U	35.4	-28.3		55.15	-	-	-	-	68.2	-13.05	331	155	H
6	6.714	44.22	PK-U	35.6	-28.4		51.42	-	-	-	-	68.2	-16.78	261	254	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS**

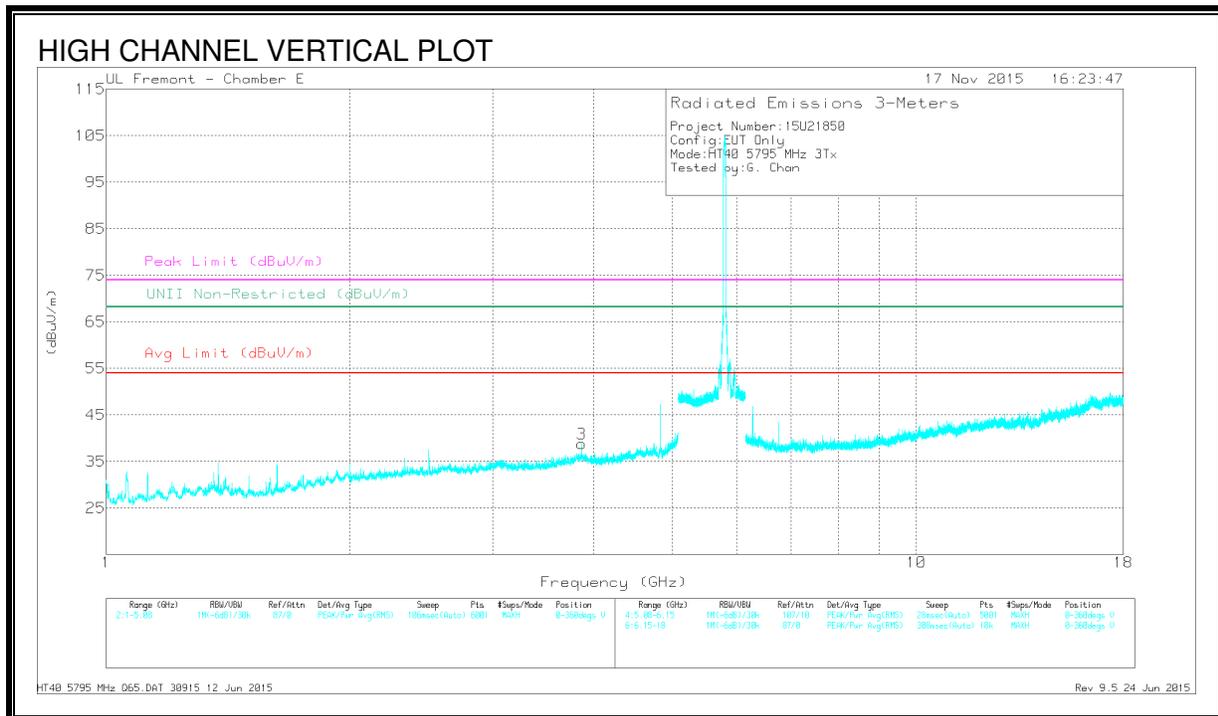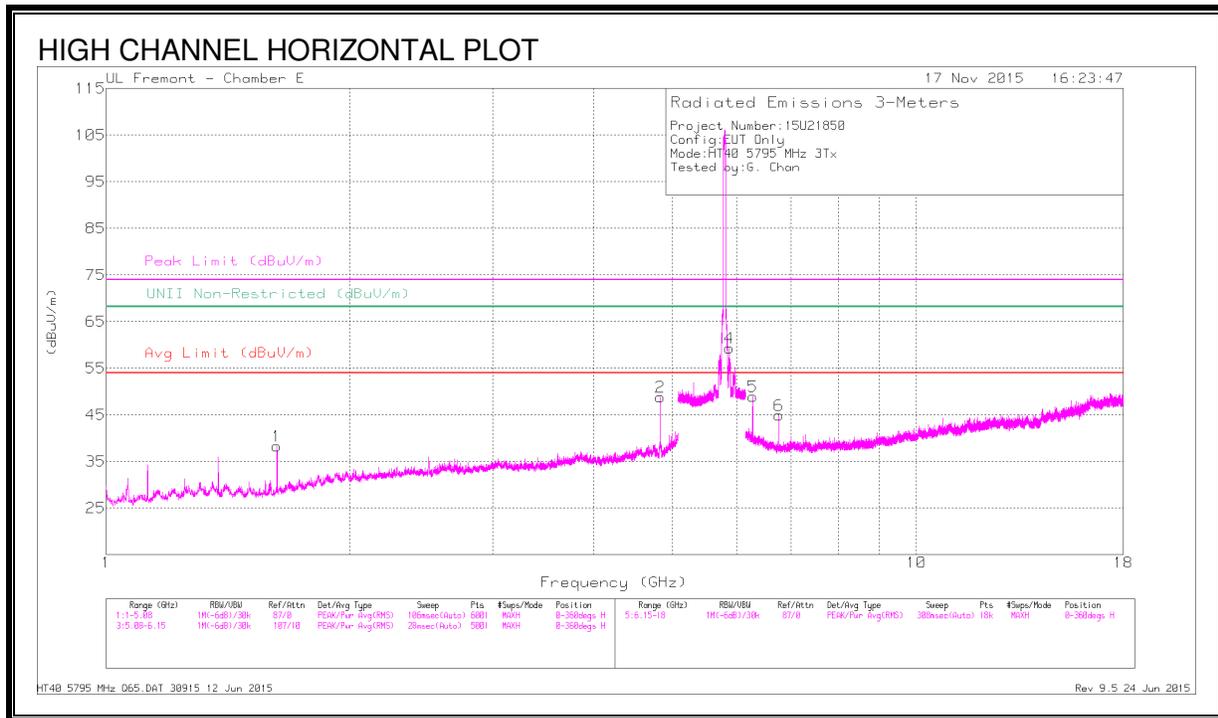

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.625	50.79	PK-U	28.2	-34.2		44.79	-	-	74	-29.21	-	-	357	161	H
	* 1.625	43.55	ADR	28.2	-34.2	.11	37.55	54	-16.45	-	-	-	-	357	161	H
2	* 4.829	48.74	PK-U	34.1	-28.9		53.94	-	-	74	-20.06	-	-	286	308	H
	* 4.829	44.88	ADR	34.1	-28.9	.11	50.08	54	-3.92	-	-	-	-	286	308	H
3	* 3.863	42.9	PK-U	33.5	-29.9		46.5	-	-	74	-27.5	-	-	155	204	V
	* 3.863	33.64	ADR	33.5	-29.9	.11	37.24	54	-16.76	-	-	-	-	155	204	V
4	5.872	50.32	PK-U	34.9	-20.4		64.82	-	-	-	-	68.2	-3.38	344	222	H
5	6.278	46.58	PK-U	35.4	-28.4		53.58	-	-	-	-	68.2	-14.62	290	143	H
6	6.761	43.73	PK-U	35.6	-28.3		51.03	-	-	-	-	68.2	-17.17	293	258	H


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 9.13. 802.11ac HT80 1TX MODE IN THE 5.8 GHz BAND


#### RESTRICTED BANDEDGE, CHAIN 0 (LOW)

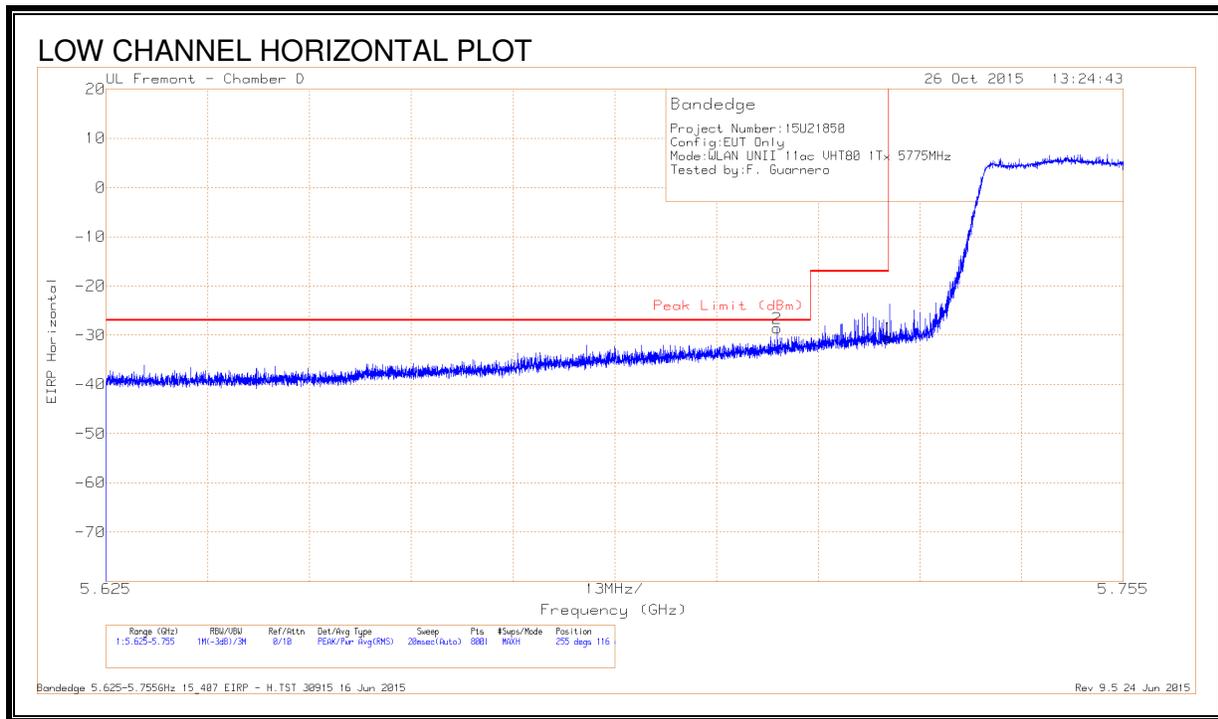

#### DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-59.39	Pk	34.6	-17.6	11.8	-30.59	-17	-13.59	255	116	H
2	5.711	-57.45	Pk	34.5	-17.5	11.8	-28.65	-27	-1.65	255	116	H

Pk - Peak detector

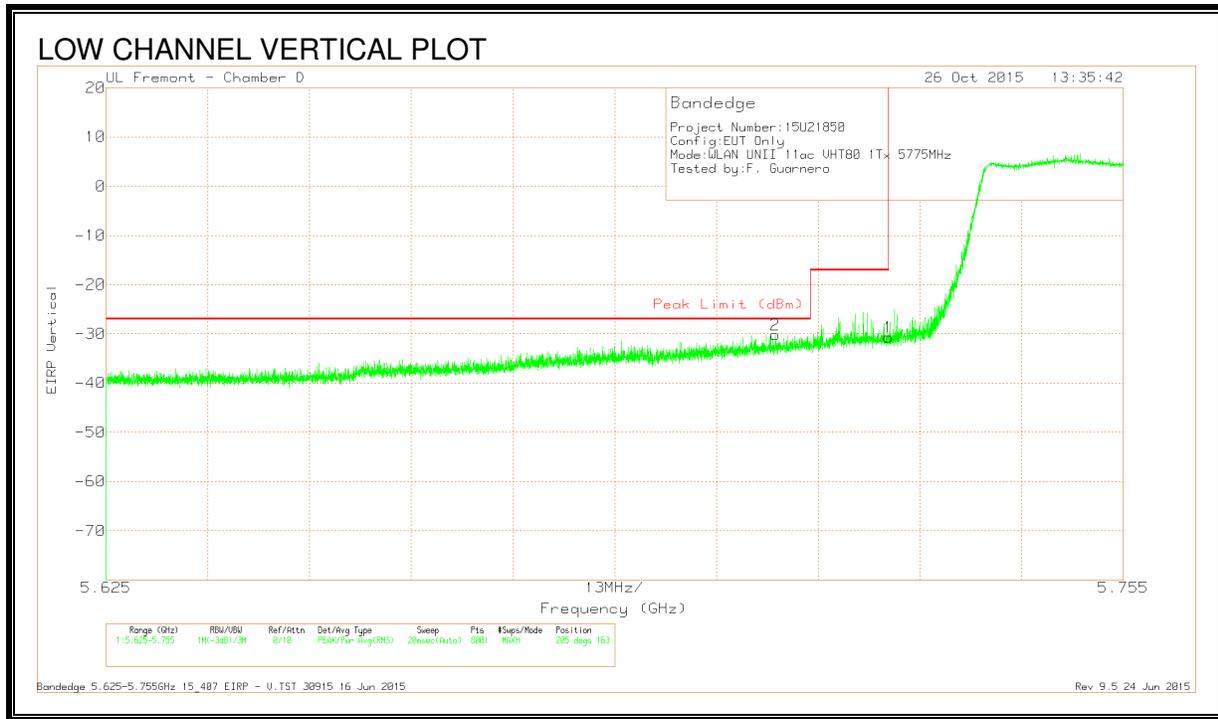


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-59.44	Pk	34.6	-17.6	11.8	-30.64	-17	-13.64	205	163	V
2	5.711	-58.97	Pk	34.5	-17.5	11.8	-30.17	-27	-3.17	205	163	V

Pk - Peak detector


**RESTRICTED BANDEDGE, CHAIN 0 (HIGH)**

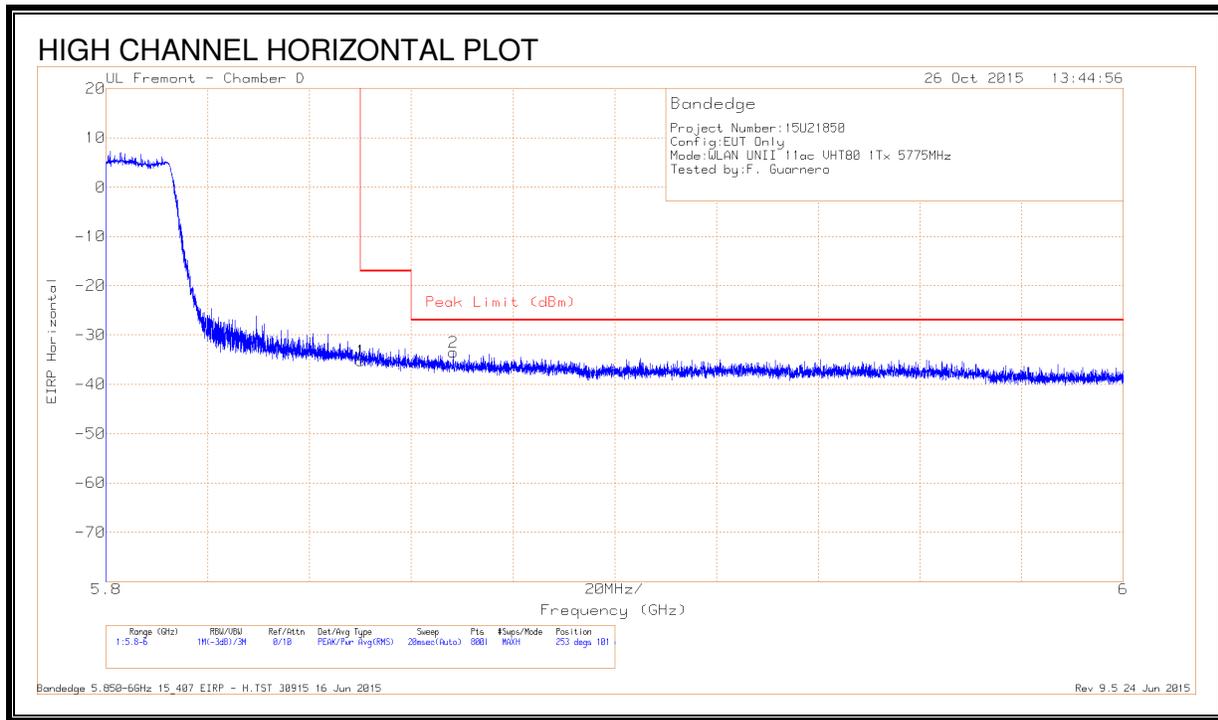

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-64.2	Pk	34.9	-17.7	11.8	-35.2	-17	-18.2	253	101	H
2	5.868	-62.7	Pk	35	-17.6	11.8	-33.5	-27	-6.5	253	101	H

Pk - Peak detector


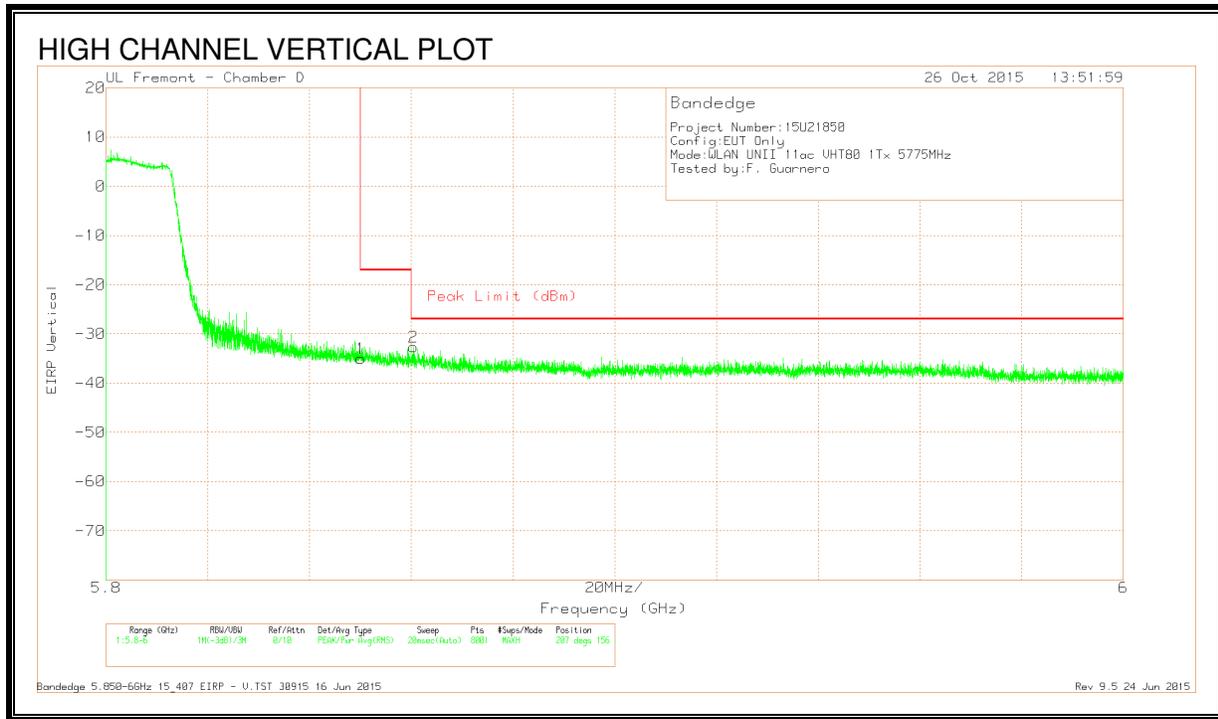


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.95	Pk	34.9	-17.7	11.8	-34.95	-17	-17.95	207	156	V
2	5.86	-61.8	Pk	35	-17.6	11.8	-32.6	-27	-5.6	207	156	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

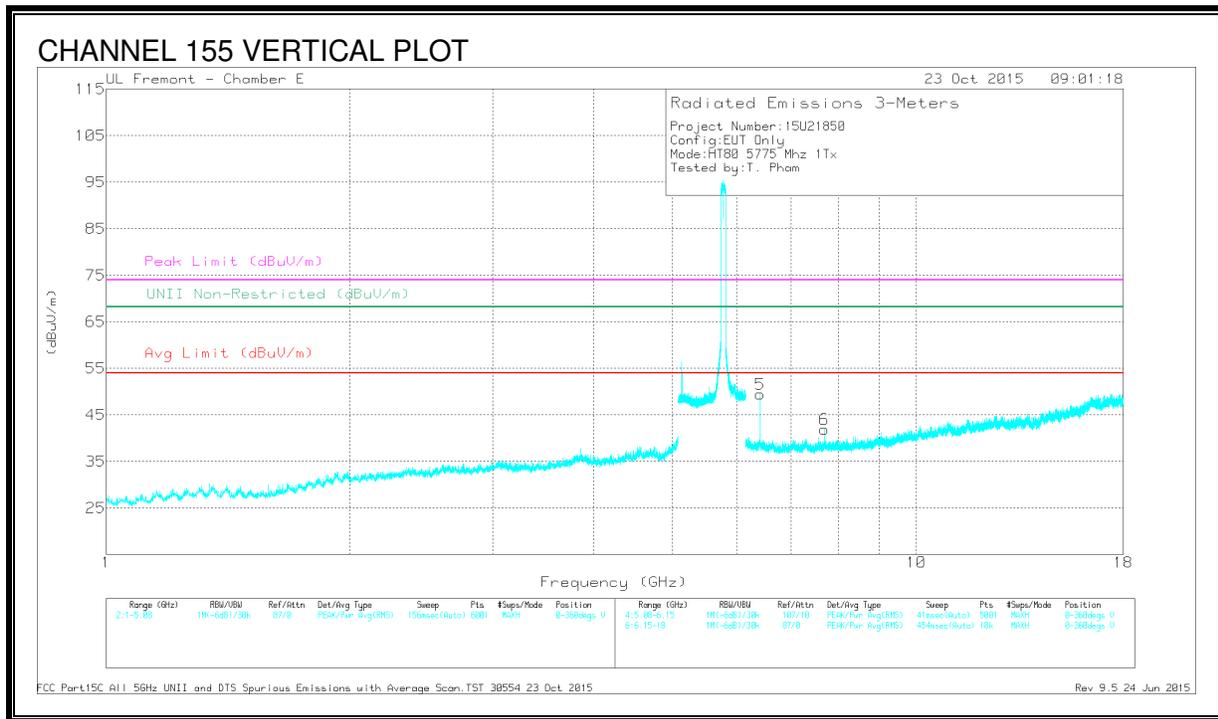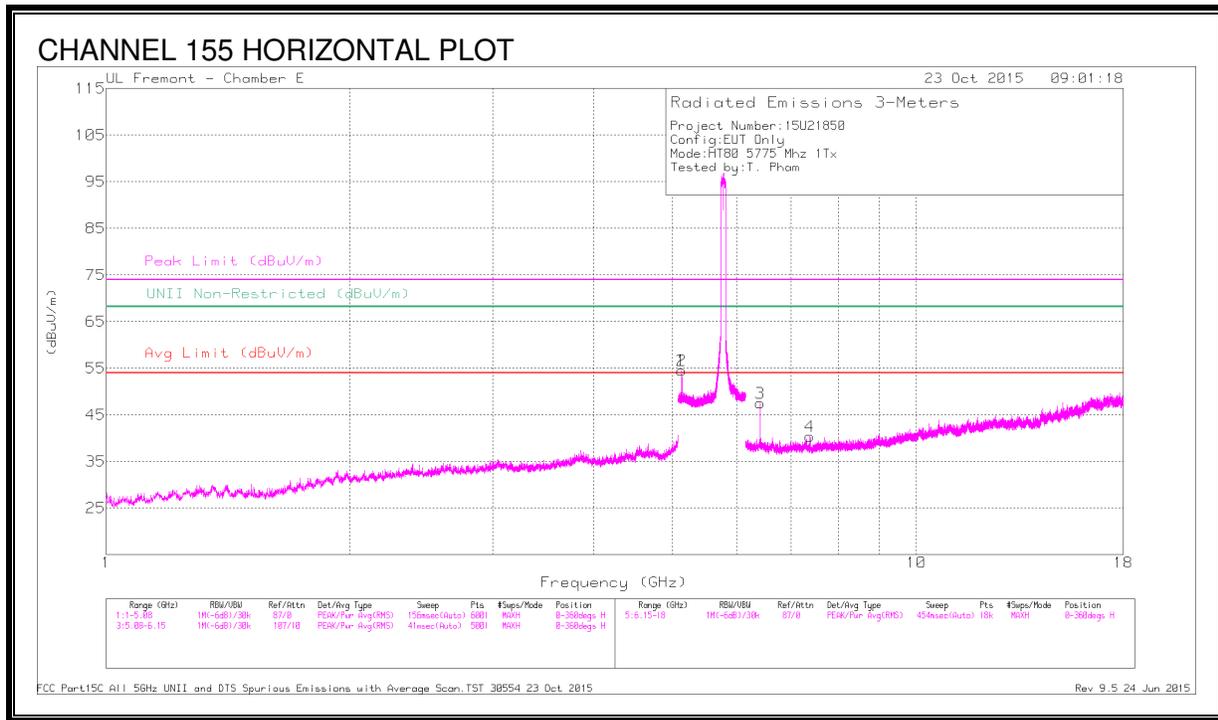

**DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.133	47.47	PK-U	34.3	-20.5		61.27	-	-	74	-12.73	-	-	145	141	H
	* 5.133	39.85	ADR	34.3	-20.5	.12	53.65	54	-35	-	-	-	-	145	141	H
2	* 5.133	47.55	PK-U	34.3	-20.5		61.35	-	-	74	-12.65	-	-	143	140	H
	* 5.133	39.84	ADR	34.3	-20.5	.12	53.64	54	-36	-	-	-	-	143	140	H
3	* 7.391	39.53	PK-U	35.5	-27.9		47.13	-	-	74	-26.87	-	-	141	235	H
	* 7.39	27.88	ADR	35.5	-27.9	.12	35.48	54	-18.52	-	-	-	-	141	235	H
5	* 7.699	39.6	PK-U	35.8	-27.2		48.2	-	-	74	-25.8	-	-	260	180	V
	* 7.7	28.04	ADR	35.8	-27.2	.12	36.64	54	-17.36	-	-	-	-	260	180	V
4	6.417	46.26	PK-U	35.5	-27.6		54.16	-	-	-	-	68.2	-14.04	110	218	H
6	6.417	46.58	PK-U	35.5	-27.6		54.48	-	-	-	-	68.2	-13.72	241	200	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


**RESTRICTED BANDEDGE, CHAIN 1 (LOW)**

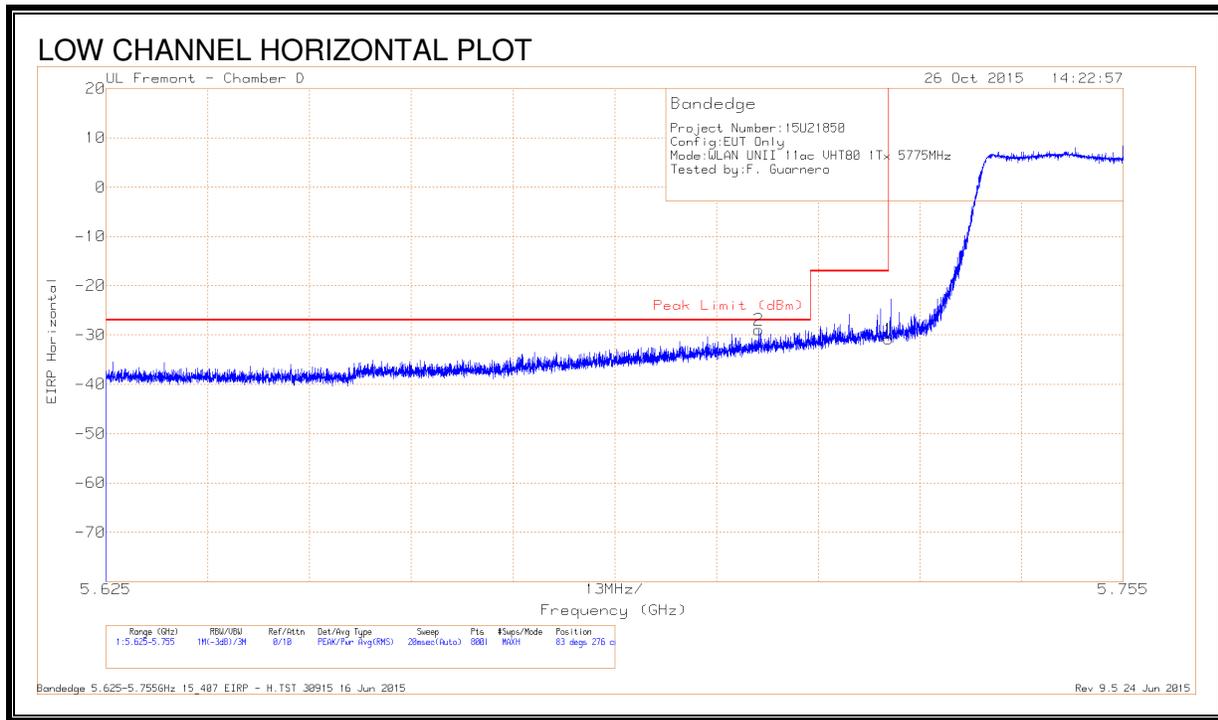

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-59.64	Pk	34.6	-17.6	11.8	-30.84	-17	-13.84	83	276	H
2	5.708	-57.61	Pk	34.5	-17.6	11.8	-28.91	-27	-1.91	83	276	H

Pk - Peak detector

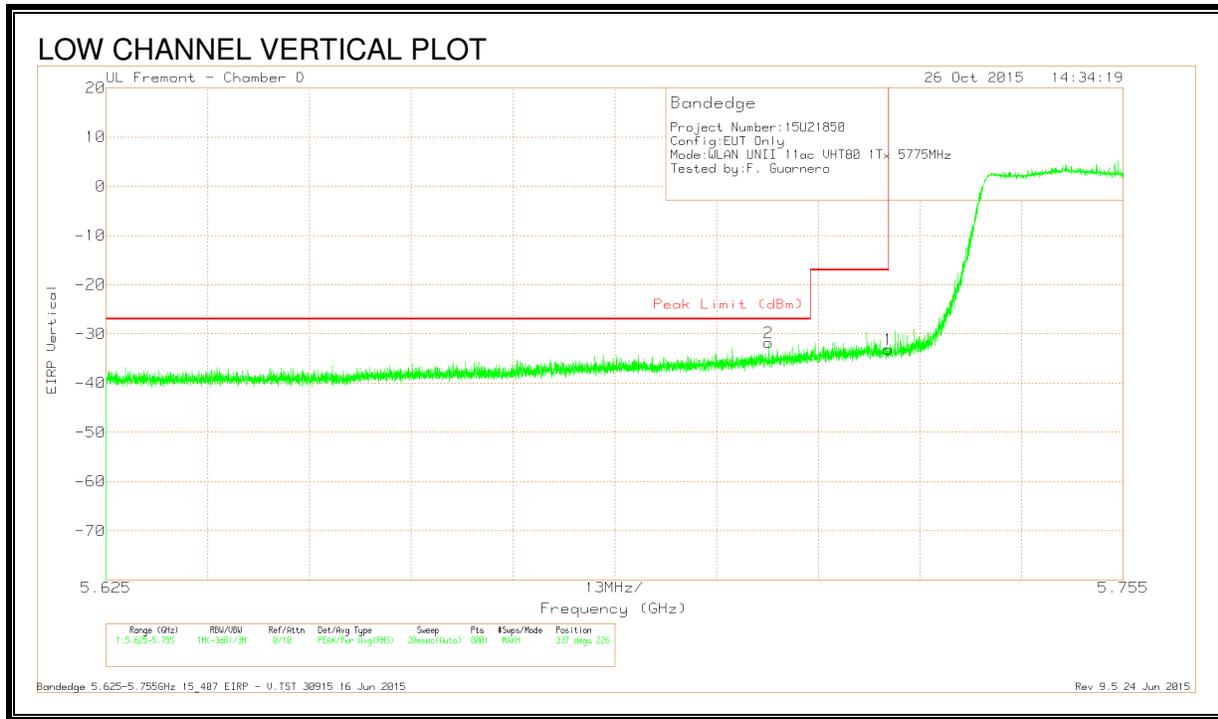


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-61.99	Pk	34.6	-17.6	11.8	-33.19	-17	-16.19	337	226	V
2	5.71	-60.59	Pk	34.5	-17.5	11.8	-31.79	-27	-4.79	337	226	V

Pk - Peak detector


**RESTRICTED BANDEDGE, CHAIN 1 (HIGH)**

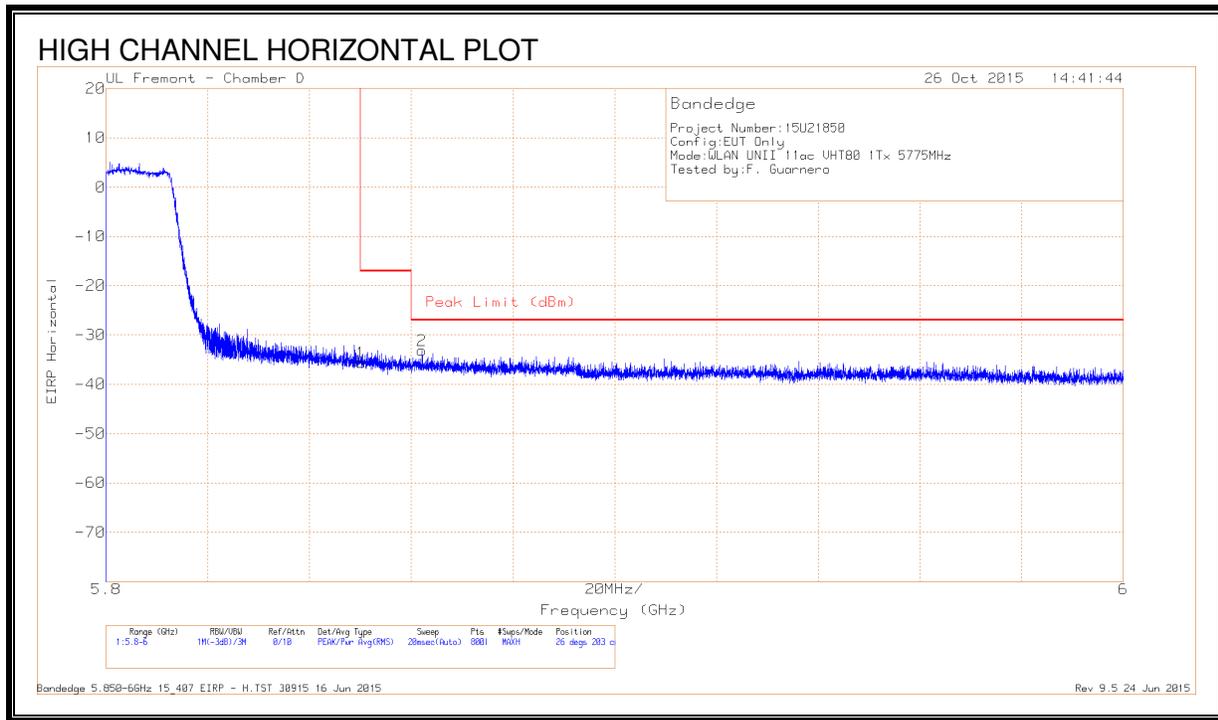

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-64.61	Pk	34.9	-17.7	11.8	-35.61	-17	-18.61	26	203	H
2	5.862	-62.32	Pk	35	-17.6	11.8	-33.12	-27	-6.12	26	203	H

Pk - Peak detector


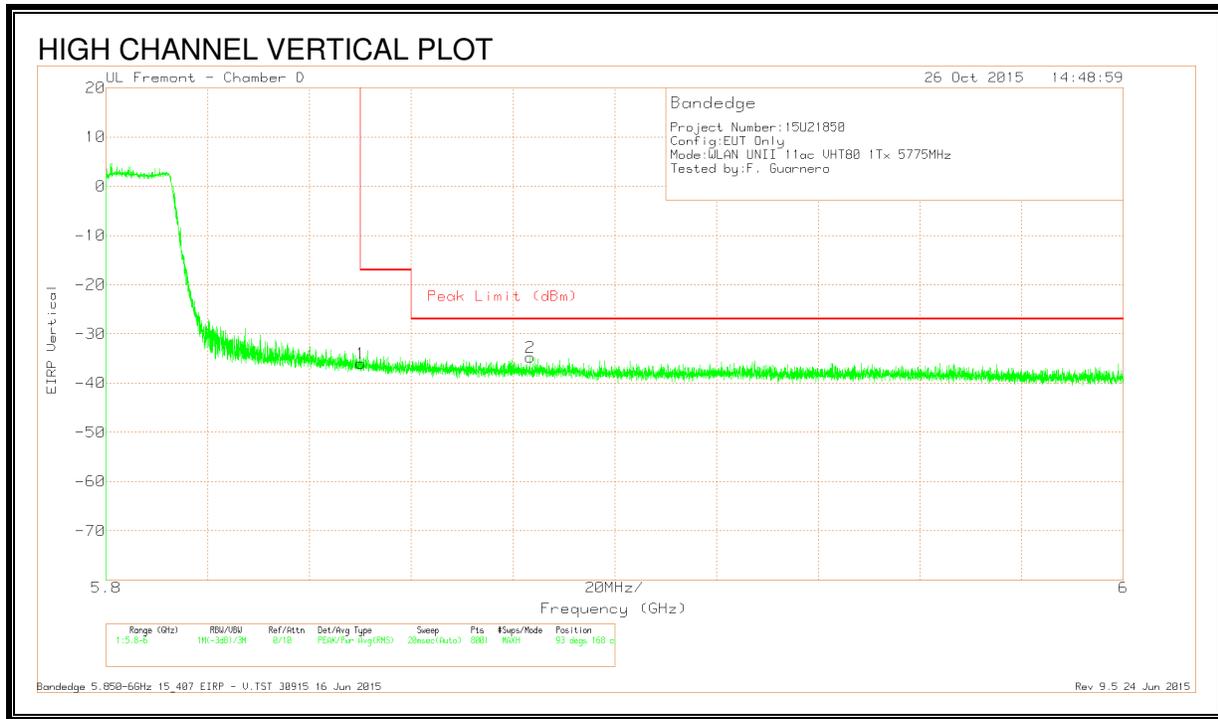


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-64.98	Pk	34.9	-17.7	11.8	-35.98	-17	-18.98	93	168	V
2	5.883	-64.1	Pk	35	-17.4	11.8	-34.7	-27	-7.7	93	168	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

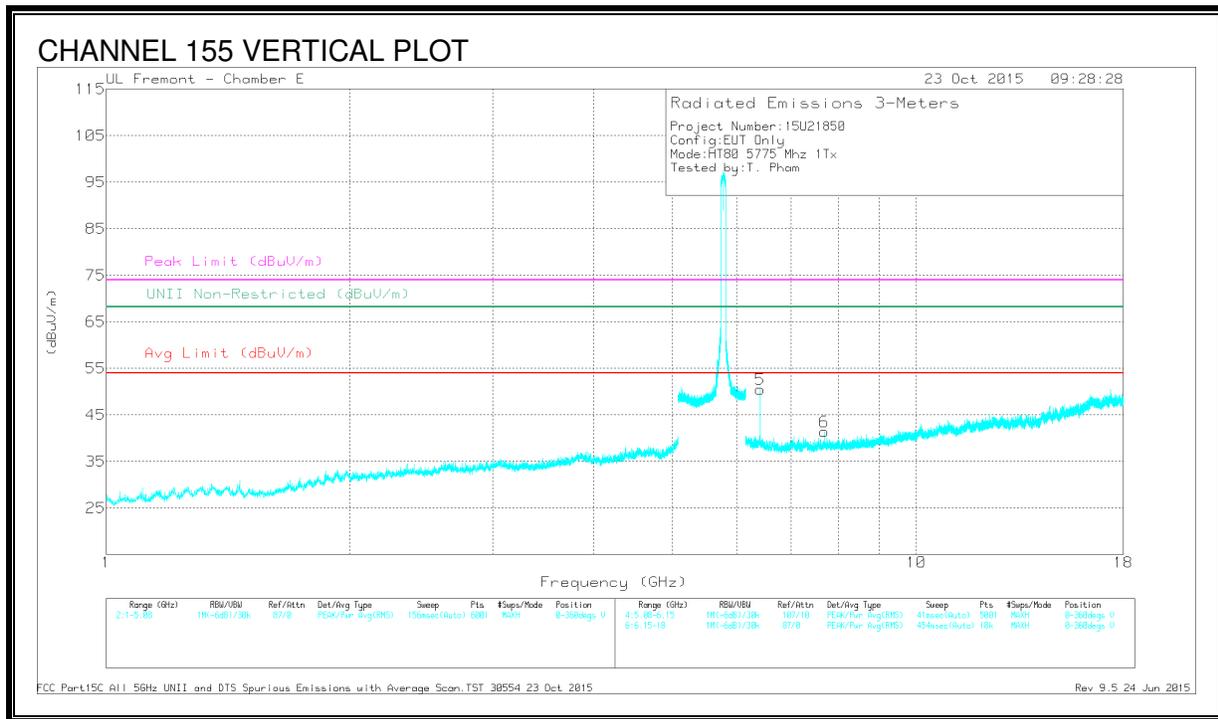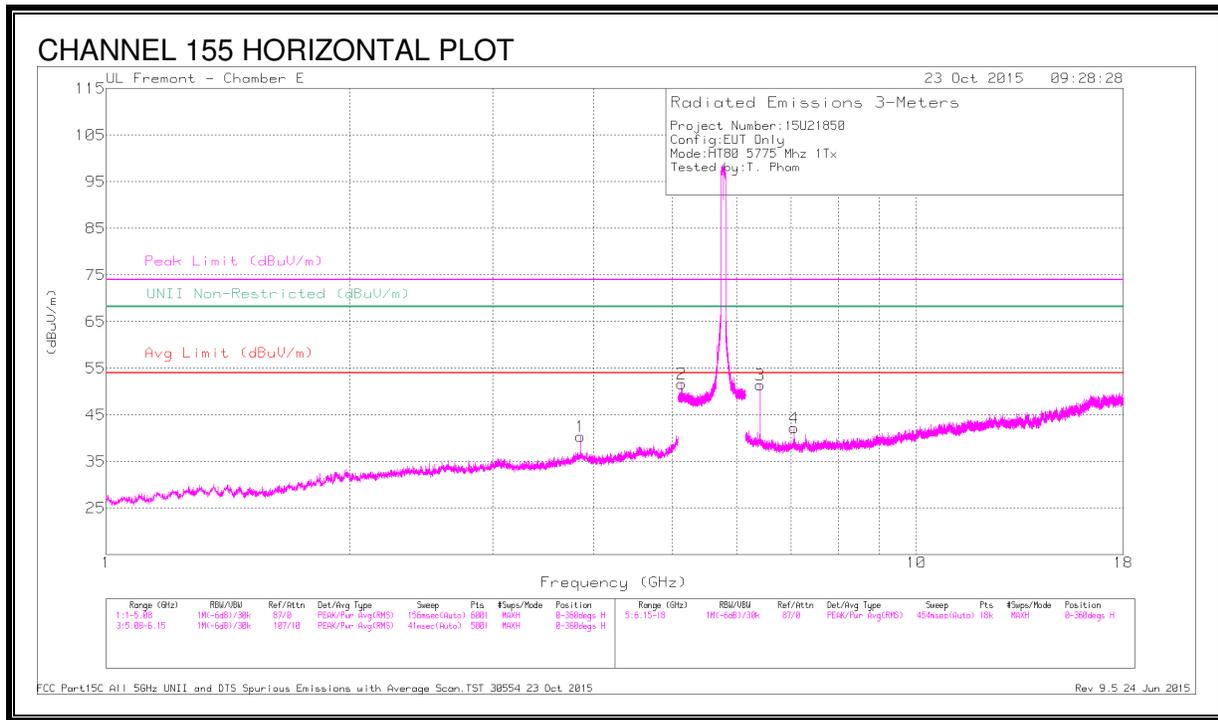

**DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fl tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.85	44.07	PK-U	33.5	-29.8		47.77	-	-	74	-26.23	-	-	191	164	H
	* 3.85	34.09	ADR	33.5	-29.8	.12	37.79	54	-16.21	-	-	-	-	191	164	H
2	* 5.133	46.14	PK-U	34.3	-20.5		59.94	-	-	74	-14.06	-	-	325	238	H
	* 5.133	36.9	ADR	34.3	-20.5	.12	50.7	54	-3.3	-	-	-	-	325	238	H
3	6.417	47.91	PK-U	35.5	-27.6		55.81	-	-	-	-	68.2	-12.39	19	199	H
4	7.058	39.27	PK-U	35.6	-27.3		47.57	-	-	-	-	68.2	-20.63	16	182	H
5	6.417	46.41	PK-U	35.5	-27.6		54.31	-	-	-	-	68.2	-13.89	355	140	V
6	* 7.701	38.7	PK-U	35.8	-27.2		47.3	-	-	74	-26.7	-	-	342	126	V
	* 7.7	28.22	ADR	35.8	-27.2	.12	36.82	54	-17.18	-	-	-	-	342	126	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


**RESTRICTED BANDEDGE, CHAIN 2 (LOW)**

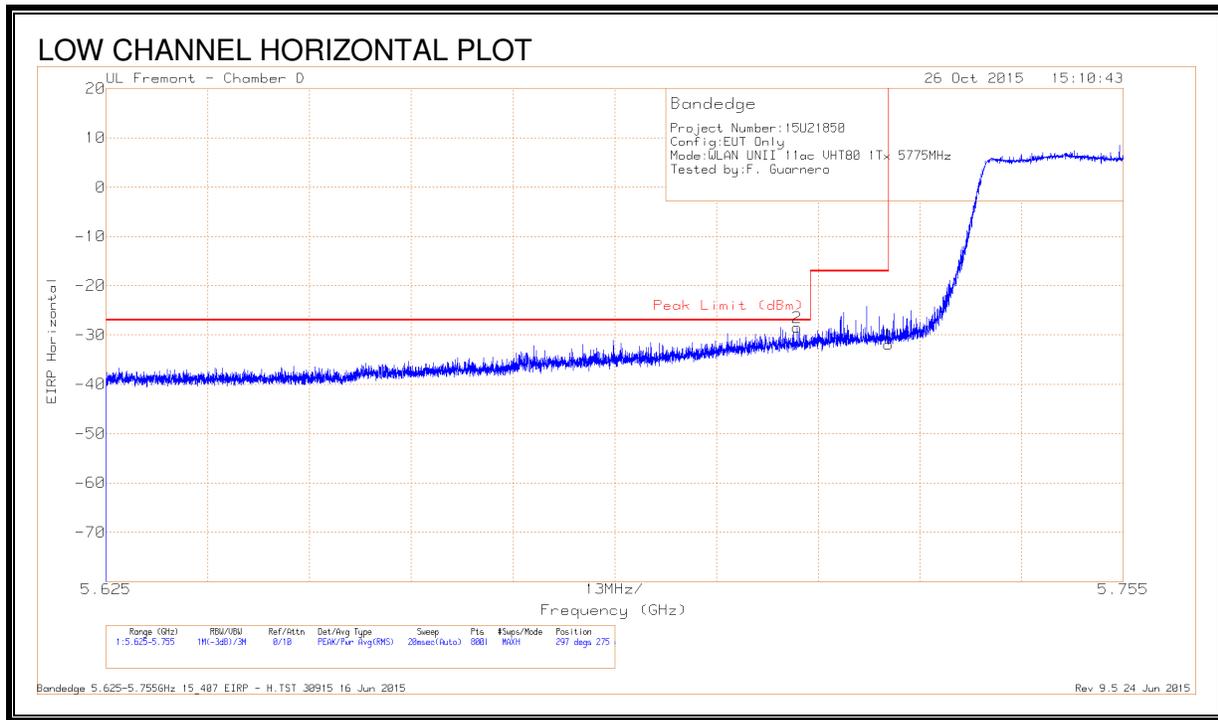

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-60.69	Pk	34.6	-17.6	11.8	-31.89	-17	-14.89	297	275	H
2	5.713	-57.37	Pk	34.6	-17.5	11.8	-28.47	-27	-1.47	297	275	H

Pk - Peak detector

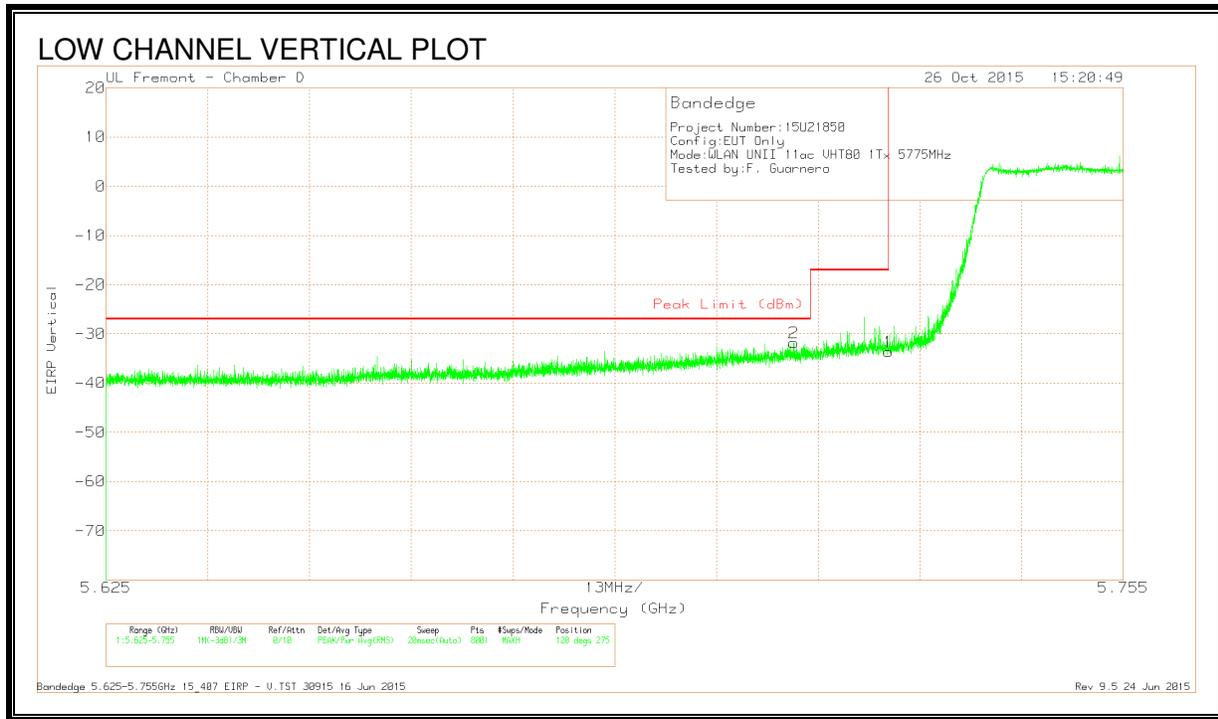


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-62.48	Pk	34.6	-17.6	11.8	-33.68	-17	-16.68	120	275	V
2	5.713	-60.69	Pk	34.6	-17.5	11.8	-31.79	-27	-4.79	120	275	V

Pk - Peak detector


**RESTRICTED BANDEDGE, CHAIN 1 (HIGH)**

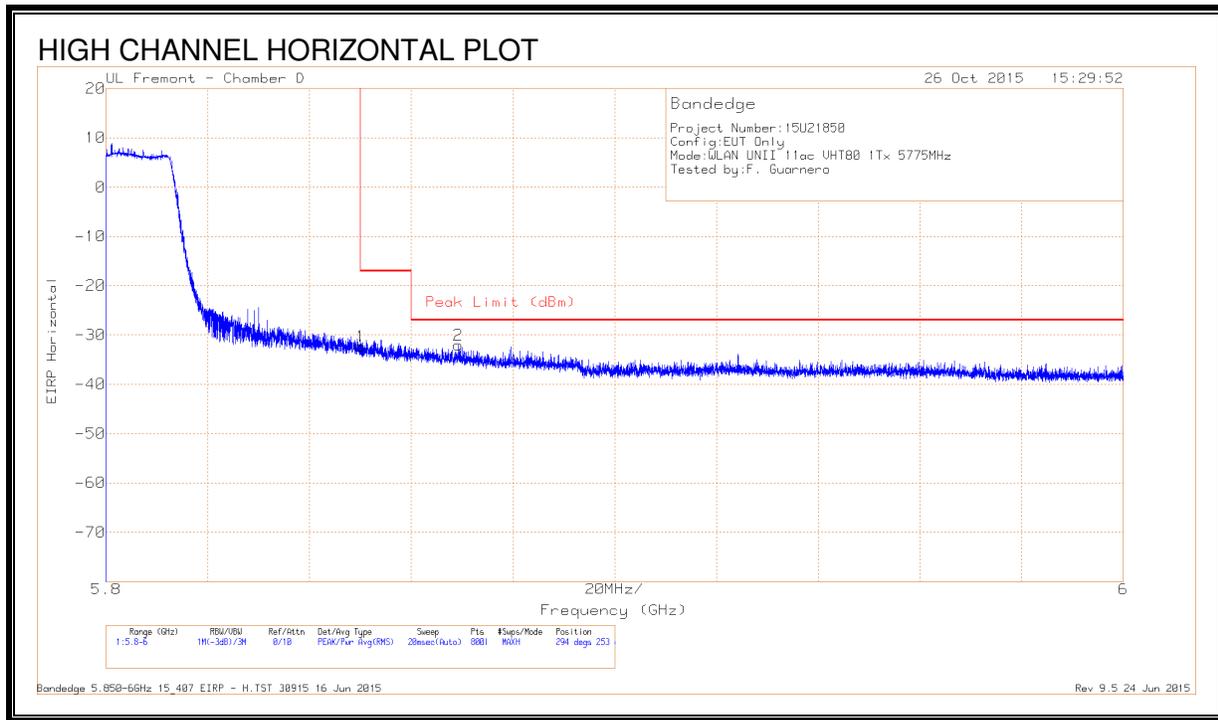

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-61.27	Pk	34.9	-17.7	11.8	-32.27	-17	-15.27	294	253	H
2	5.869	-61.2	Pk	35	-17.6	11.8	-32	-27	-5	294	253	H

Pk - Peak detector


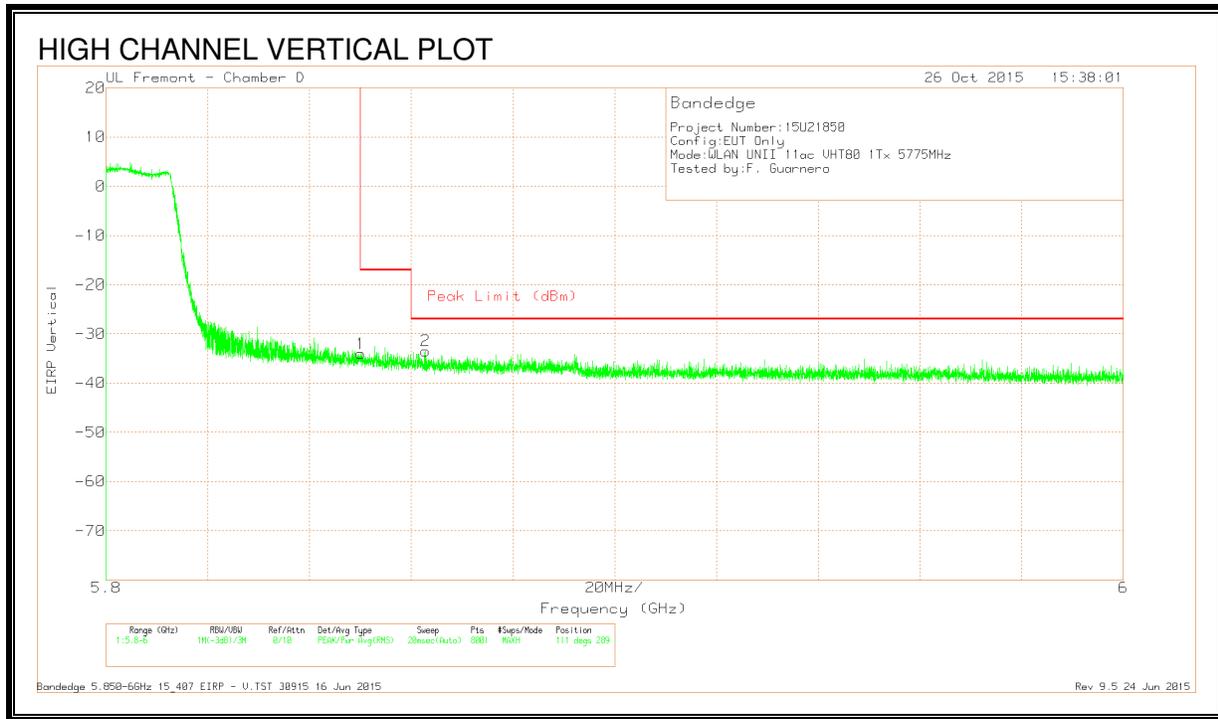


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.01	Pk	34.9	-17.7	11.8	-34.01	-17	-17.01	111	289	V
2	5.863	-62.65	Pk	35	-17.6	11.8	-33.45	-27	-6.45	111	289	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

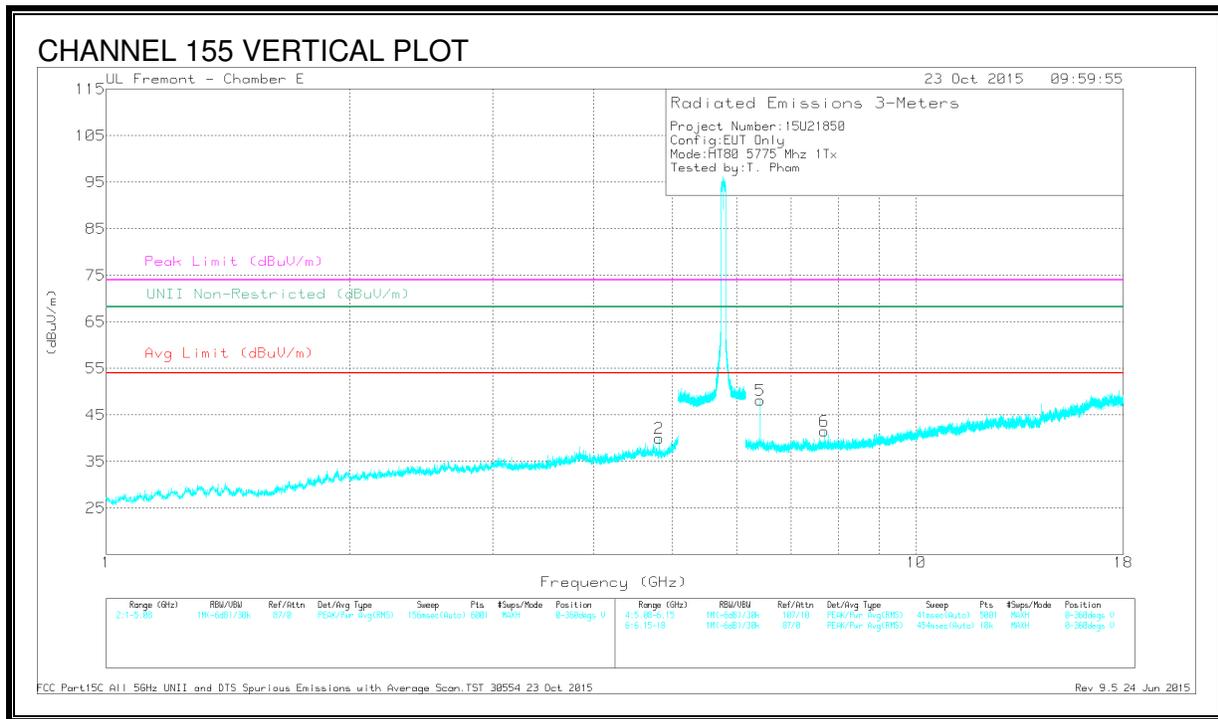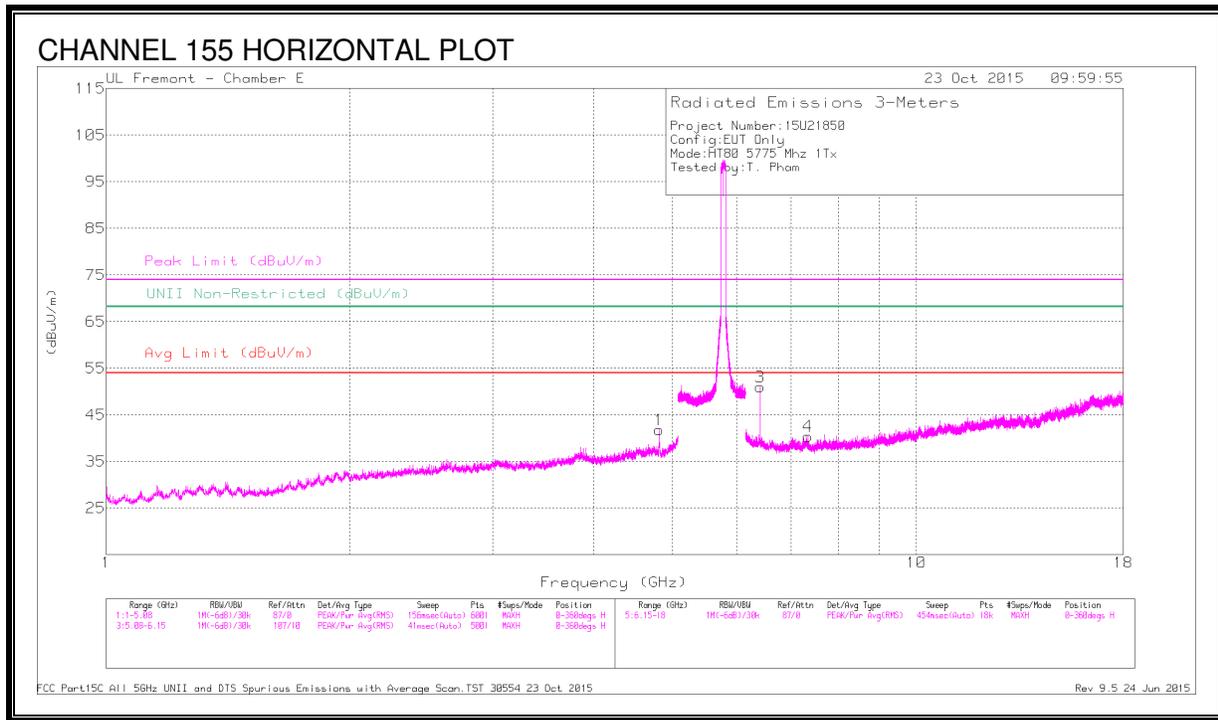

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.813	46.98	PK-U	34.1	-29		52.08	-	-	74	-21.92	-	-	272	263	H
	* 4.812	34.94	ADR	34.1	-29	.12	40.04	54	-13.96	-	-	-	-	272	263	H
2	* 4.812	44.54	PK-U	34.1	-29		49.64	-	-	74	-24.36	-	-	0	347	V
	* 4.813	33.44	ADR	34.1	-29	.12	38.54	54	-15.46	-	-	-	-	0	347	V
3	6.416	46.08	PK-U	35.5	-27.6		53.98	-	-	-	-	68.2	-14.22	20	252	V
4	* 7.346	39.23	PK-U	35.5	-27.2		47.53	-	-	74	-26.47	-	-	241	189	H
	* 7.348	27.47	ADR	35.5	-27.2	.12	35.77	54	-18.23	-	-	-	-	241	189	H
5	6.417	47.3	PK-U	35.5	-27.6		55.2	-	-	-	-	68.2	-13	196	202	H
6	* 7.699	39.94	PK-U	35.8	-27.2		48.54	-	-	74	-25.46	-	-	37	229	V
	* 7.7	27.91	ADR	35.8	-27.2	.12	36.51	54	-17.49	-	-	-	-	37	229	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 9.14. 802.11ac HT80 2TX CDD MODE IN THE 5.8 GHz BAND


#### RESTRICTED BANDEDGE CHAIN 0 + 1 (LOW CHANNEL)

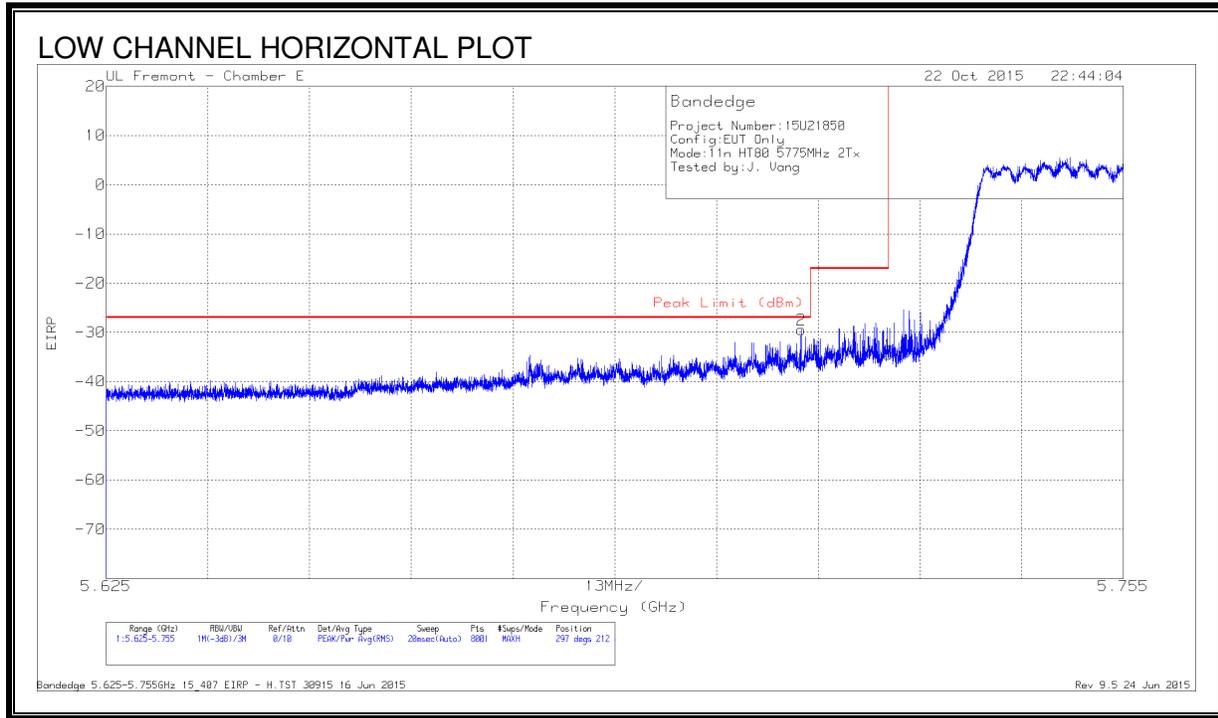

#### DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-61.15	Pk	34.7	-19.8	11.8	-34.45	-17	-17.45	297	212	H
2	5.714	-56.13	Pk	34.7	-19.8	11.8	-29.43	-27	-2.43	297	212	H

Pk - Peak detector

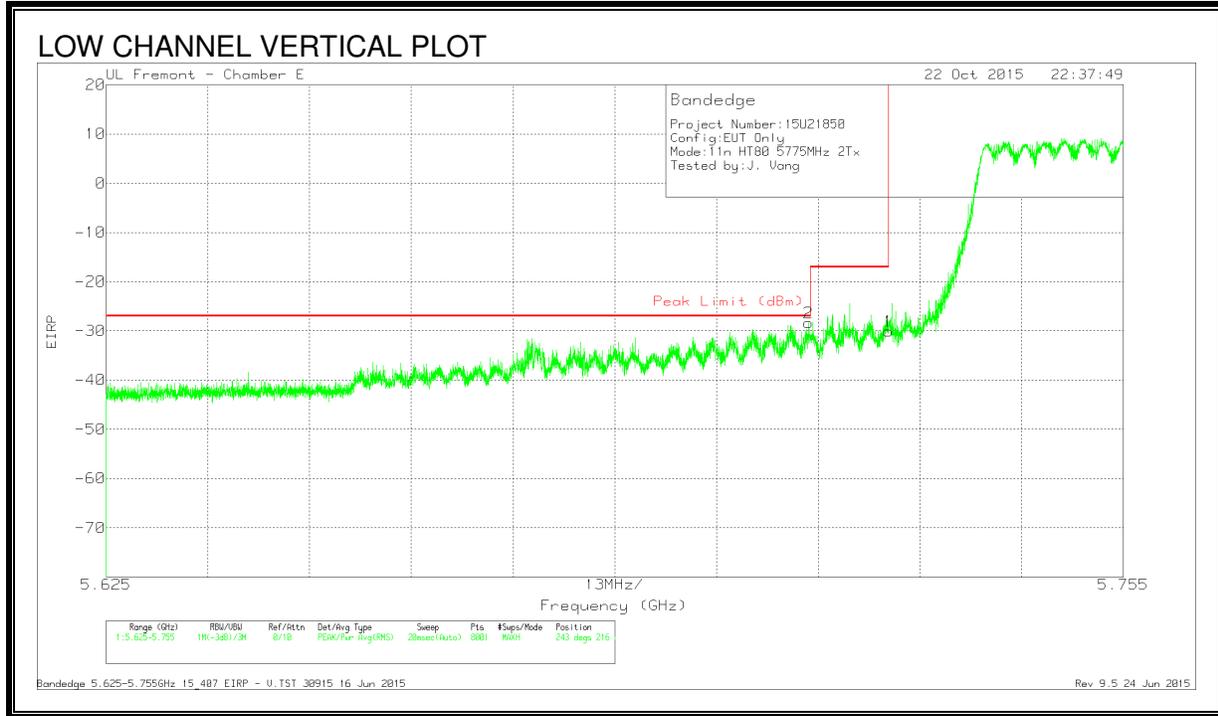


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-56.79	Pk	34.7	-19.8	11.8	-30.09	-17	-13.09	243	216	V
2	5.715	-55.05	Pk	34.7	-19.8	11.8	-28.35	-27	-1.35	243	216	V

Pk - Peak detector


**RESTRICTED BANDEDGE CHAIN 0 + 1 (HIGH)**

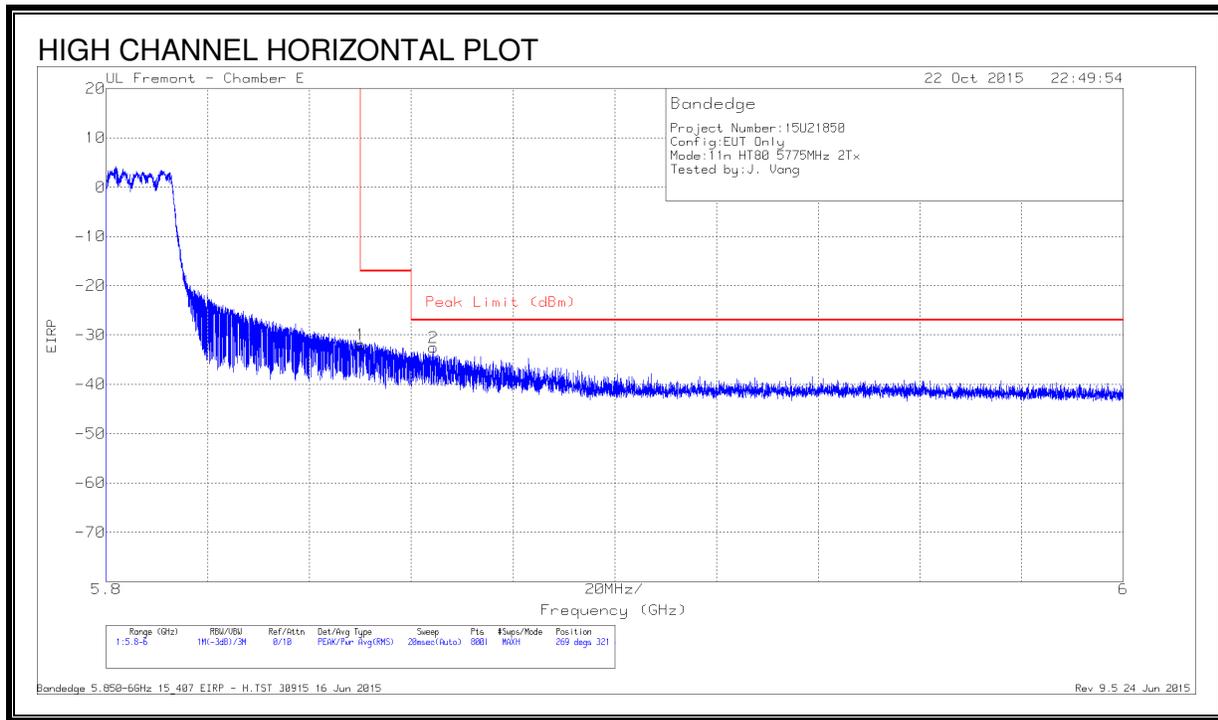

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-58.66	Pk	34.9	-20	11.8	-31.96	-17	-14.96	269	321	H
2	5.864	-59.4	Pk	34.9	-19.8	11.8	-32.5	-27	-5.5	269	321	H

Pk - Peak detector


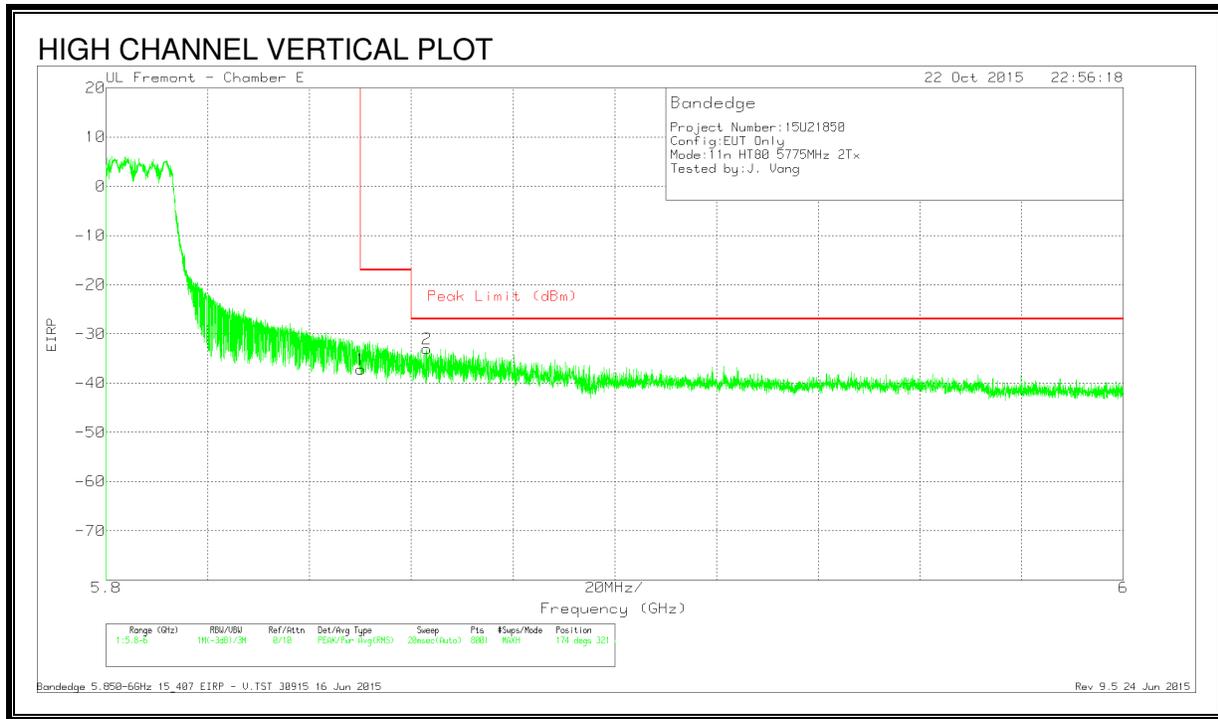


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.86	Pk	34.9	-20	11.8	-37.16	-17	-20.16	174	321	V
2	5.863	-59.97	Pk	34.9	-19.8	11.8	-33.07	-27	-6.07	174	321	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

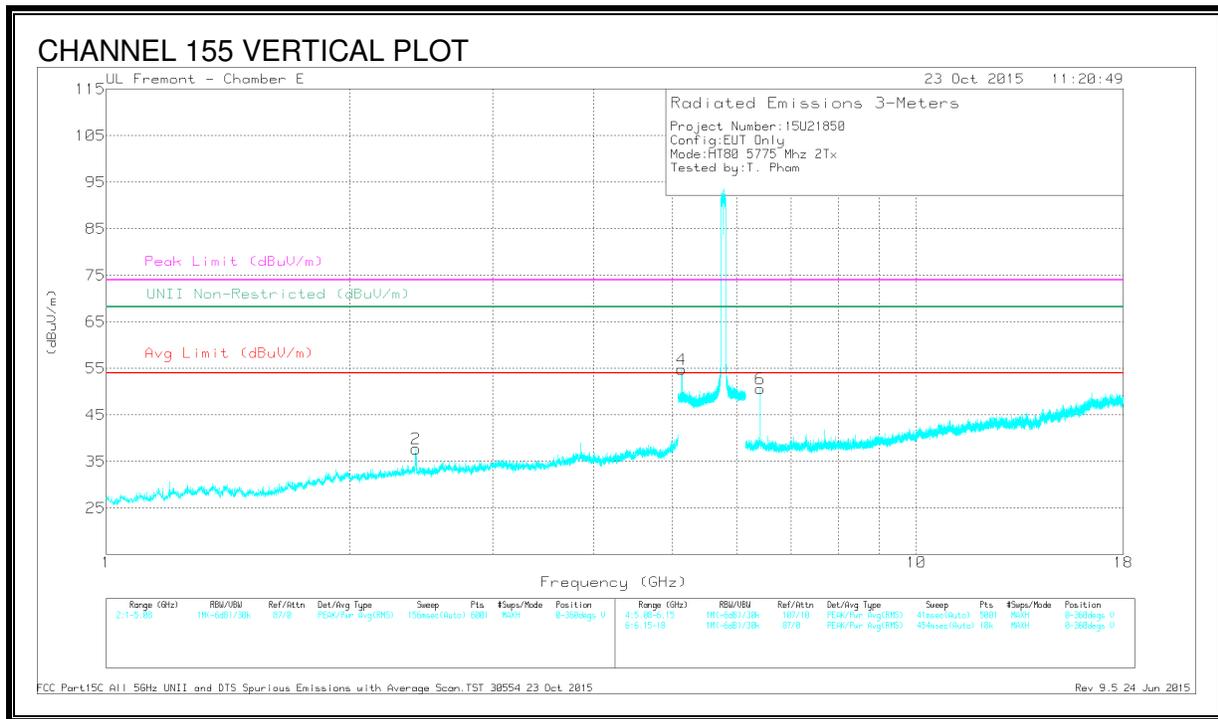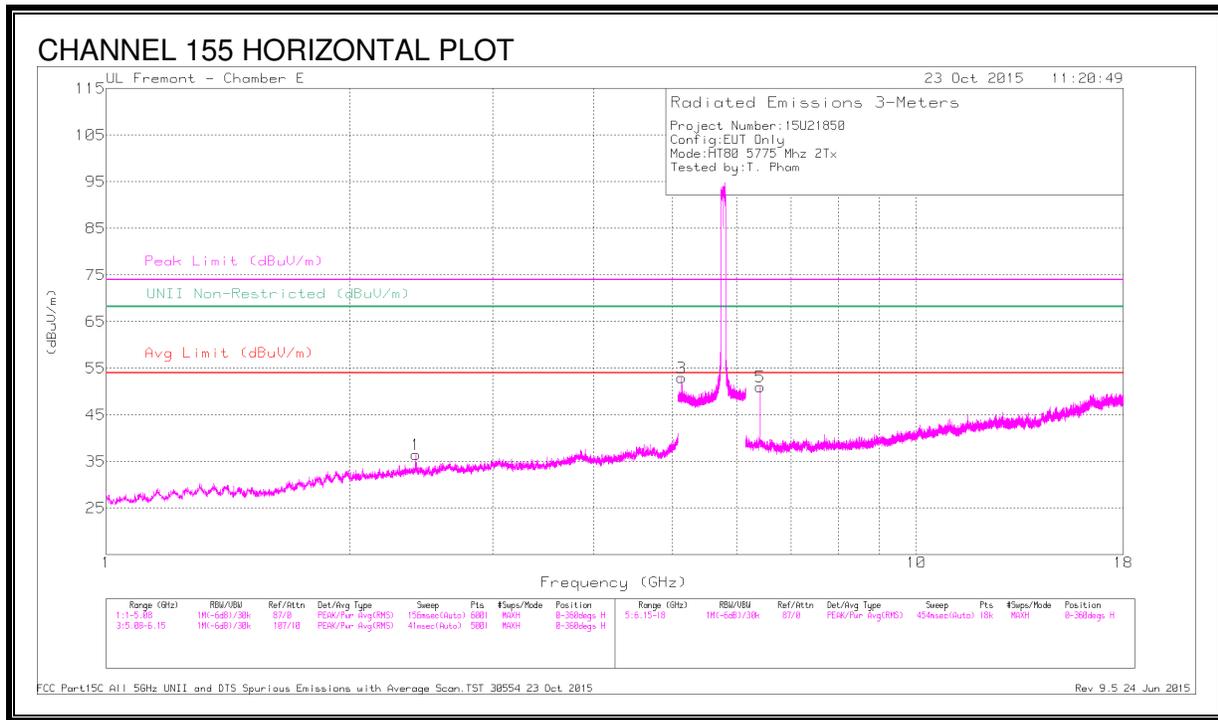

**DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.411	47.01	PK-U	32.1	-32.3		46.81	-	-	-	-	68.2	-21.39	90	366	H
2	2.41	48.46	PK-U	32.1	-32.3		48.26	-	-	-	-	68.2	-19.94	273	395	V
3	* 5.133	46.58	PK-U	34.3	-20.5		60.38	-	-	74	-13.62	-	-	213	223	H
	* 5.133	37.77	ADR	34.3	-20.5	.11	51.57	54	-2.43	-	-	-	-	213	223	H
4	* 5.133	47.38	PK-U	34.3	-20.5		61.18	-	-	74	-12.82	-	-	267	219	V
	* 5.133	39.89	ADR	34.3	-20.5	.11	53.69	54	-.31	-	-	-	-	267	219	V
5	6.417	47.75	PK-U	35.5	-27.6		55.65	-	-	-	-	68.2	-12.55	247	129	H
6	6.417	46.98	PK-U	35.5	-27.6		54.88	-	-	-	-	68.2	-13.32	231	218	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


**RESTRICTED BANDEDGE CHAIN 0 + 2 (LOW CHANNEL)**

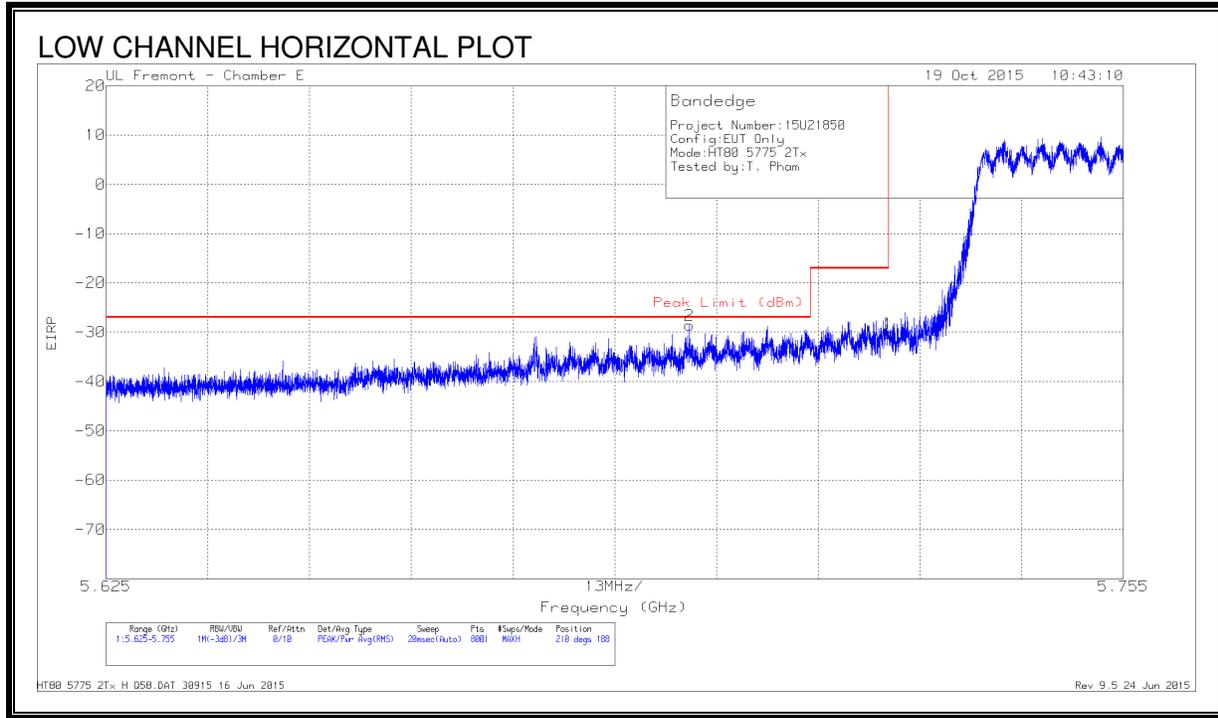

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-56.67	Pk	34.7	-20.1	11.8	-30.27	-17	-13.27	210	188	H
2	5.7	-54.99	Pk	34.7	-20.1	11.8	-28.59	-27	-1.59	210	188	H

Pk - Peak detector

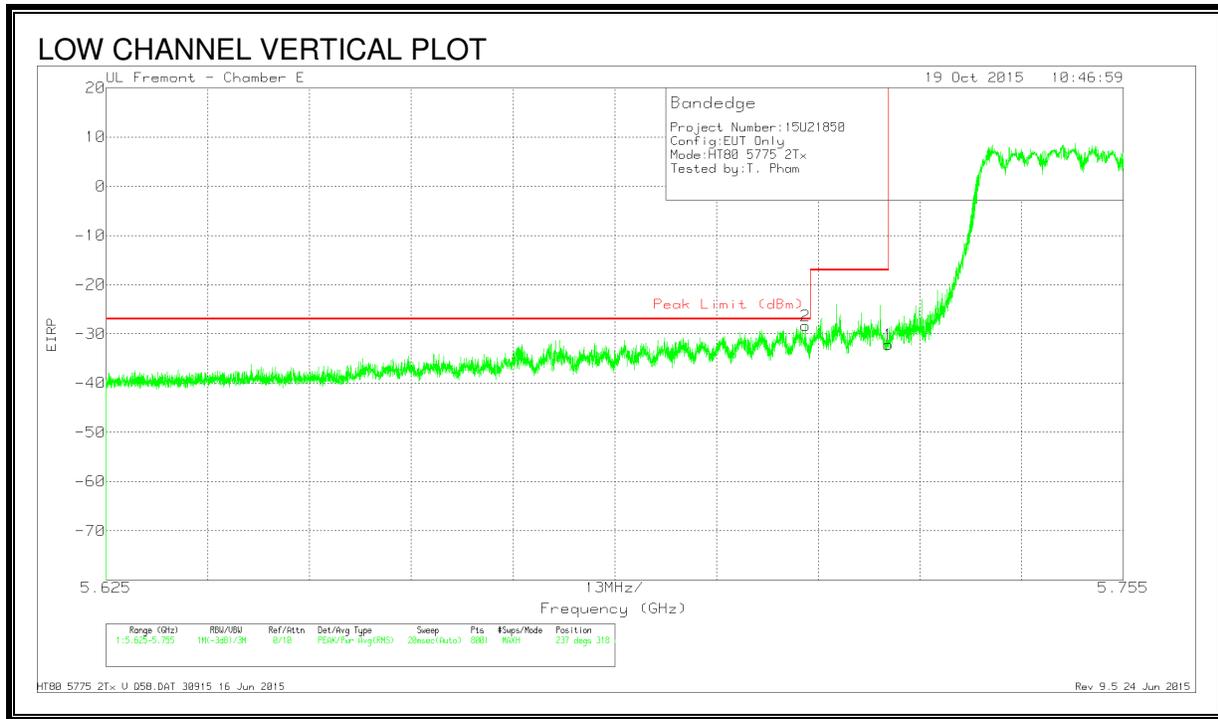


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-58.57	Pk	34.7	-20.1	11.8	-32.17	-17	-15.17	237	318	V
2	5.714	-54.78	Pk	34.7	-20.1	11.8	-28.38	-27	-1.38	237	318	V

Pk - Peak detector


**RESTRICTED BANDEDGE CHAIN 0 + 2 (HIGH)**

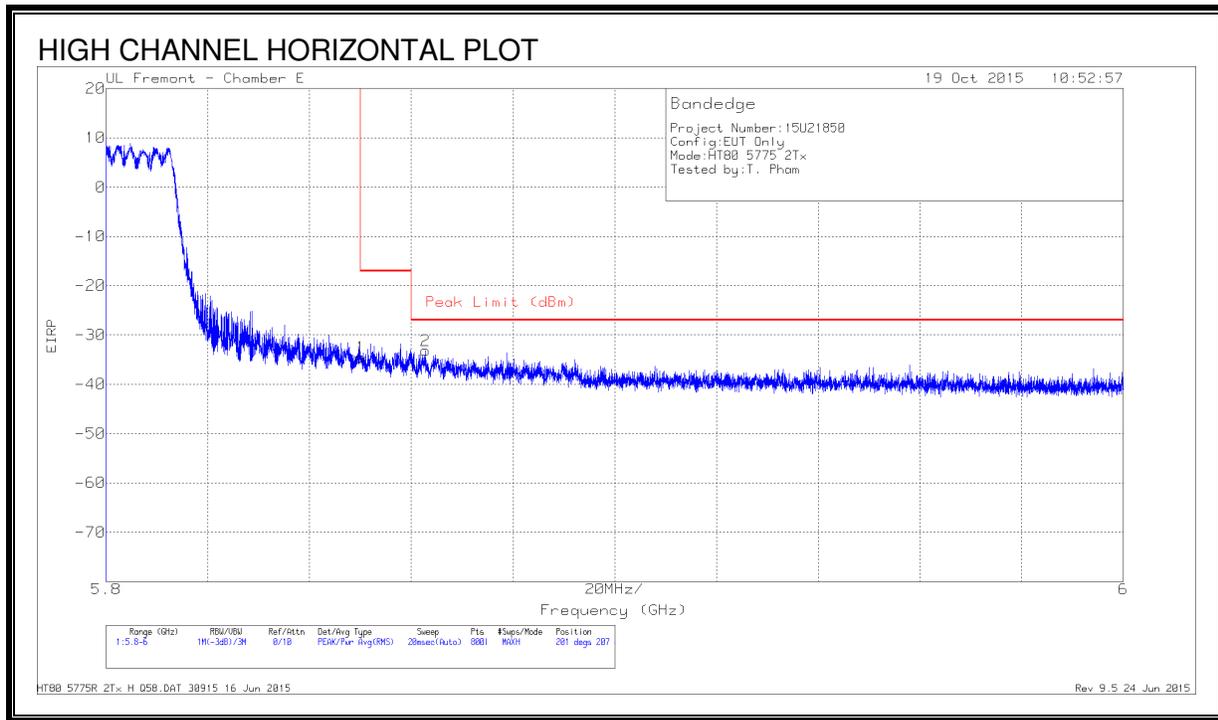

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-60.88	Pk	34.9	-20.3	11.8	-34.48	-17	-17.48	201	207	H
2	5.863	-59.47	Pk	34.9	-20.4	11.8	-33.17	-27	-6.17	201	207	H

Pk - Peak detector


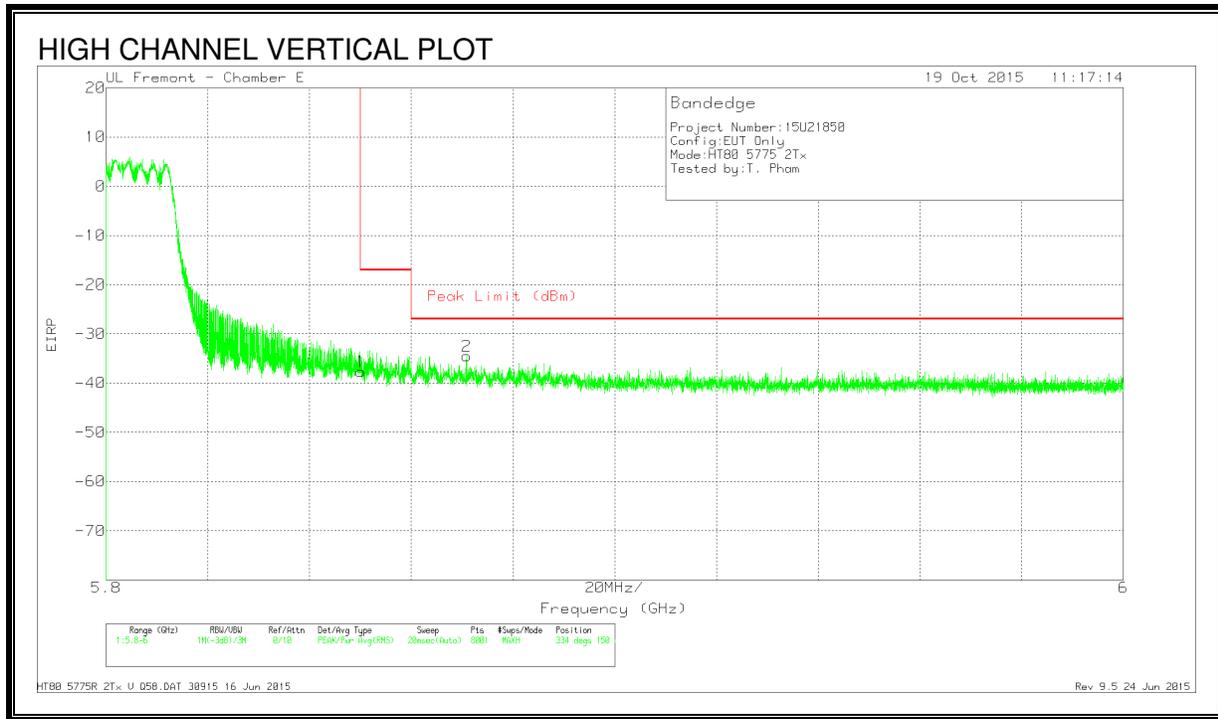


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-64.03	Pk	34.9	-20.3	11.8	-37.63	-17	-20.63	334	150	V
2	5.871	-60.83	Pk	34.9	-20.4	11.8	-34.53	-27	-7.53	334	150	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

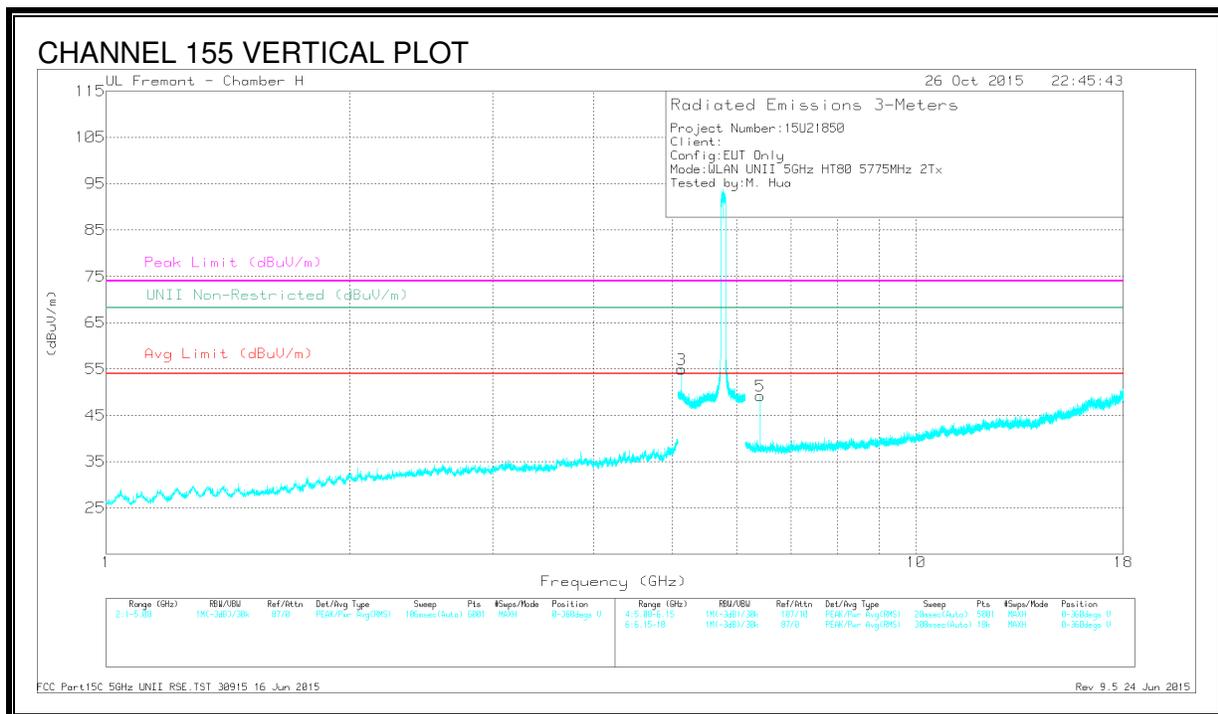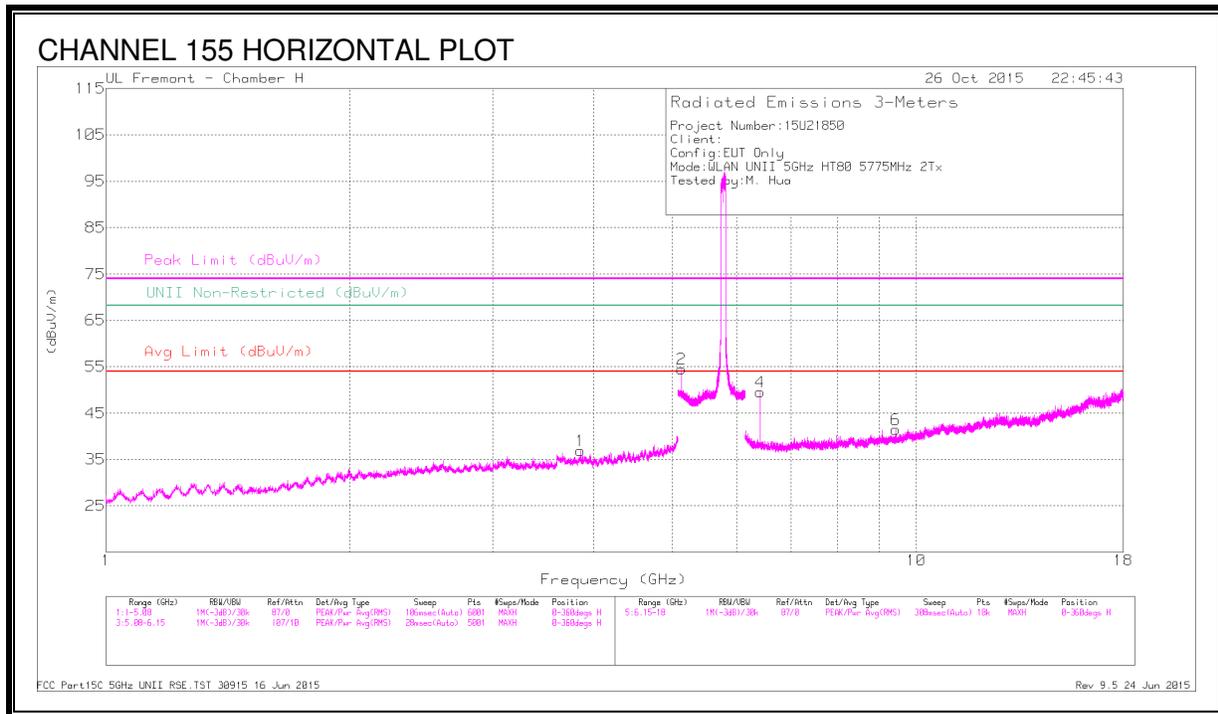

**DATA**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.85	42.82	PK-U	33.5	-31.4	0	44.92	-	-	74	-29.08	-	-	221	220	H
	* 3.85	33.5	ADR	33.5	-31.4	.11	35.71	54	-18.29	-	-	-	-	221	220	H
2	* 5.133	41.05	PK-U	34.4	-18.8	0	56.65	-	-	74	-17.35	-	-	188	193	H
	* 5.133	37.76	ADR	34.4	-18.8	.11	53.47	54	-.53	-	-	-	-	188	193	H
3	* 5.134	41.45	PK-U	34.4	-18.8	0	57.05	-	-	74	-16.95	-	-	327	189	V
	* 5.133	37.8	ADR	34.4	-18.8	.11	53.51	54	-.49	-	-	-	-	327	189	V
4	6.417	47.3	PK-U	35.6	-29.4	0	53.5	-	-	-	-	68.2	-14.7	212	101	H
5	6.417	47.79	PK-U	35.6	-29.4	0	53.99	-	-	-	-	68.2	-14.21	1	306	V
6	* 9.428	37.07	PK-U	36.5	-26.1	0	47.47	-	-	74	-26.53	-	-	0	387	H
	* 9.43	25.04	ADR	36.5	-26.1	.11	35.55	54	-18.45	-	-	-	-	0	387	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average


**RESTRICTED BANDEDGE CHAIN 1 + 2 (LOW CHANNEL)**

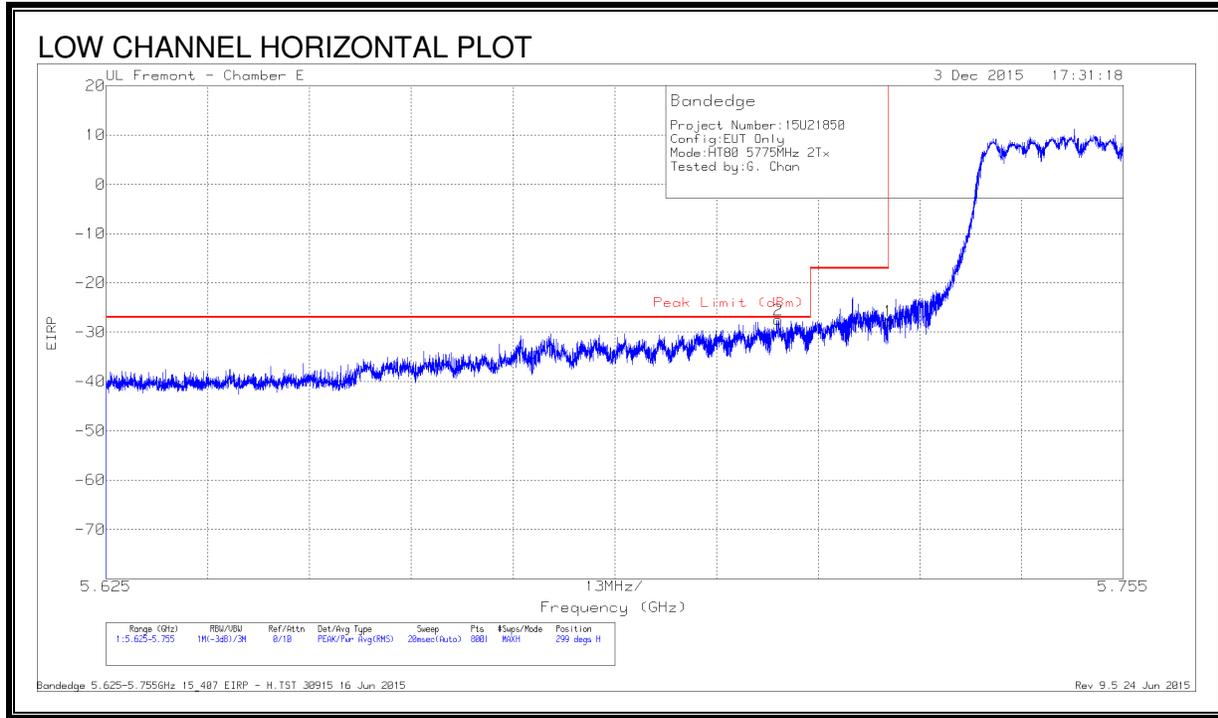

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.711	-54.25	Pk	34.7	-19.8	11.8	-27.55	-27	-55	299	231	H
1	5.725	-54.46	Pk	34.7	-19.8	11.8	-27.76	-17	-10.76	299	231	H

Pk - Peak detector

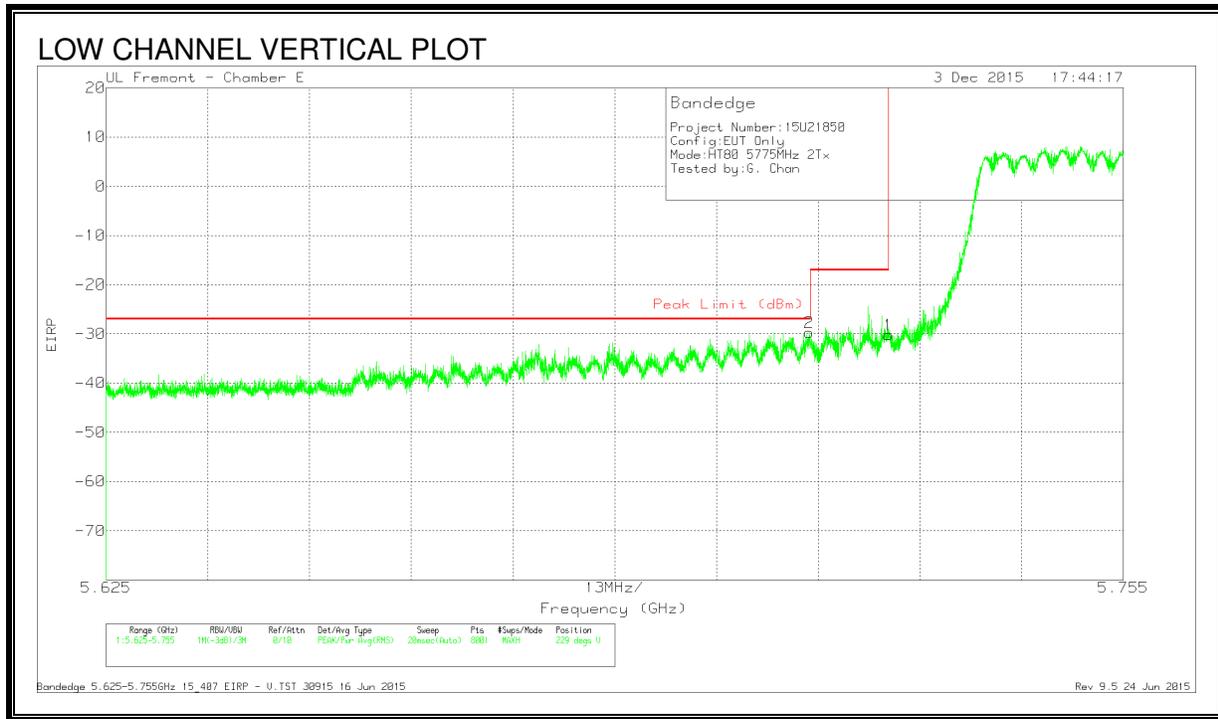


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.715	-56.43	Pk	34.7	-19.8	11.8	-29.73	-27	-2.73	229	251	V
1	5.725	-56.85	Pk	34.7	-19.8	11.8	-30.15	-17	-13.15	229	251	V

Pk - Peak detector


**RESTRICTED BANDEDGE CHAIN 1 + 2 (HIGH)**

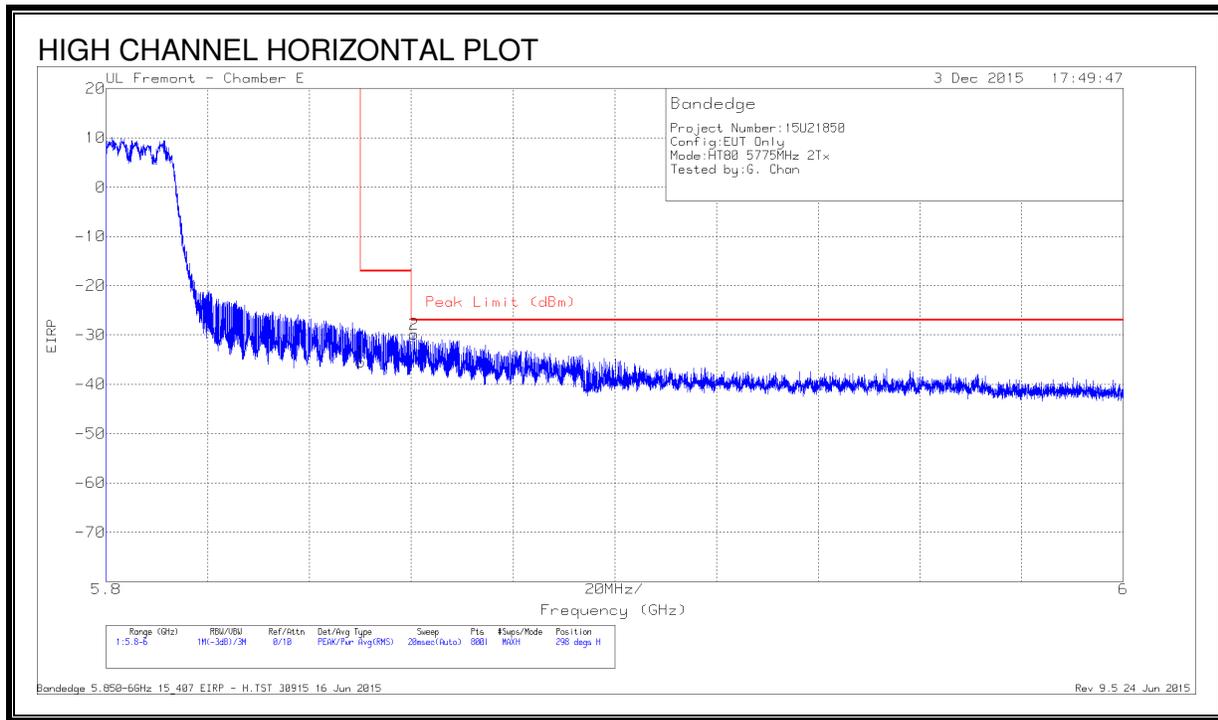

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.12	Pk	34.9	-20	11.8	-35.42	-17	-18.42	298	176	H
2	5.861	-56.78	Pk	34.9	-19.8	11.8	-29.88	-27	-2.88	298	176	H

Pk - Peak detector


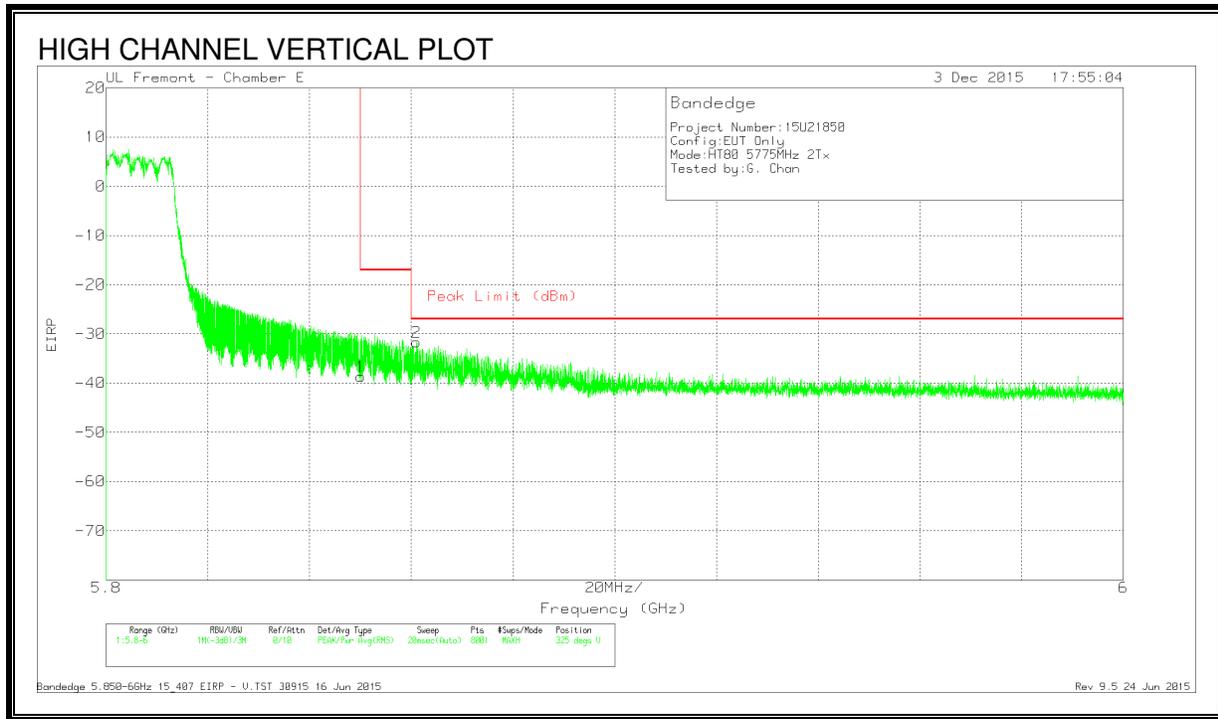


**DATA**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.38	Pk	34.9	-20	11.8	-38.68	-17	-21.68	325	188	V
2	5.861	-58.53	Pk	34.9	-19.8	11.8	-31.63	-27	-4.63	325	188	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

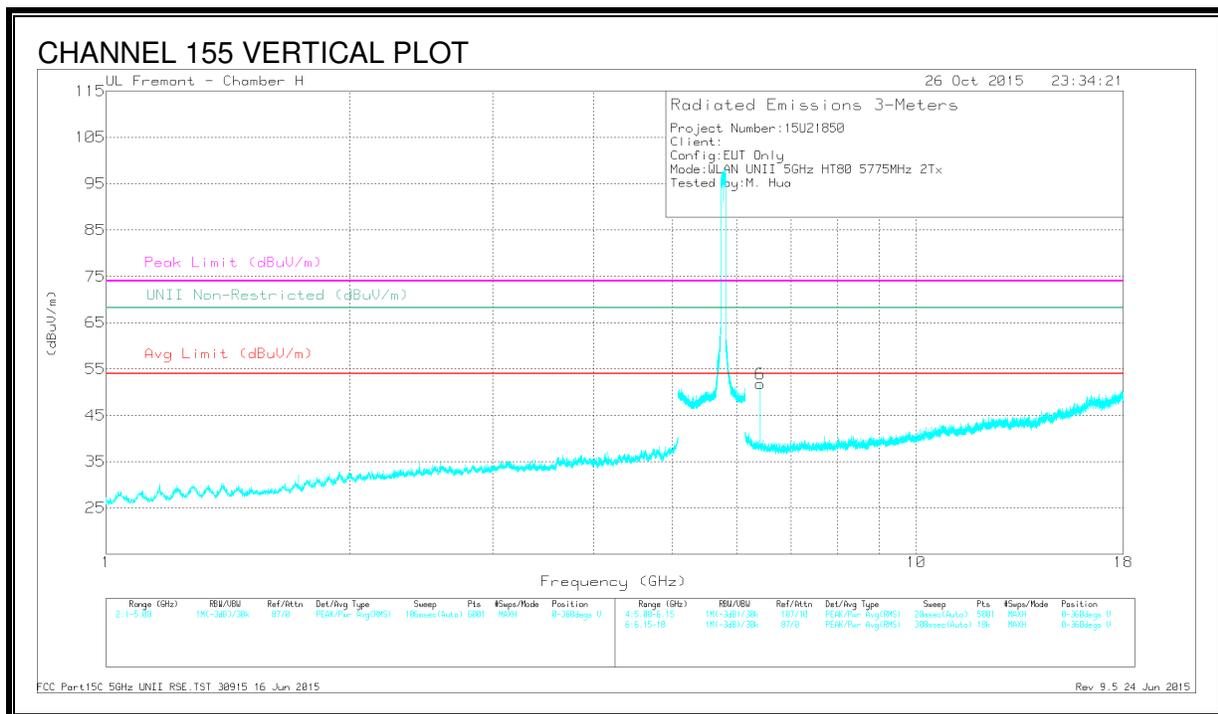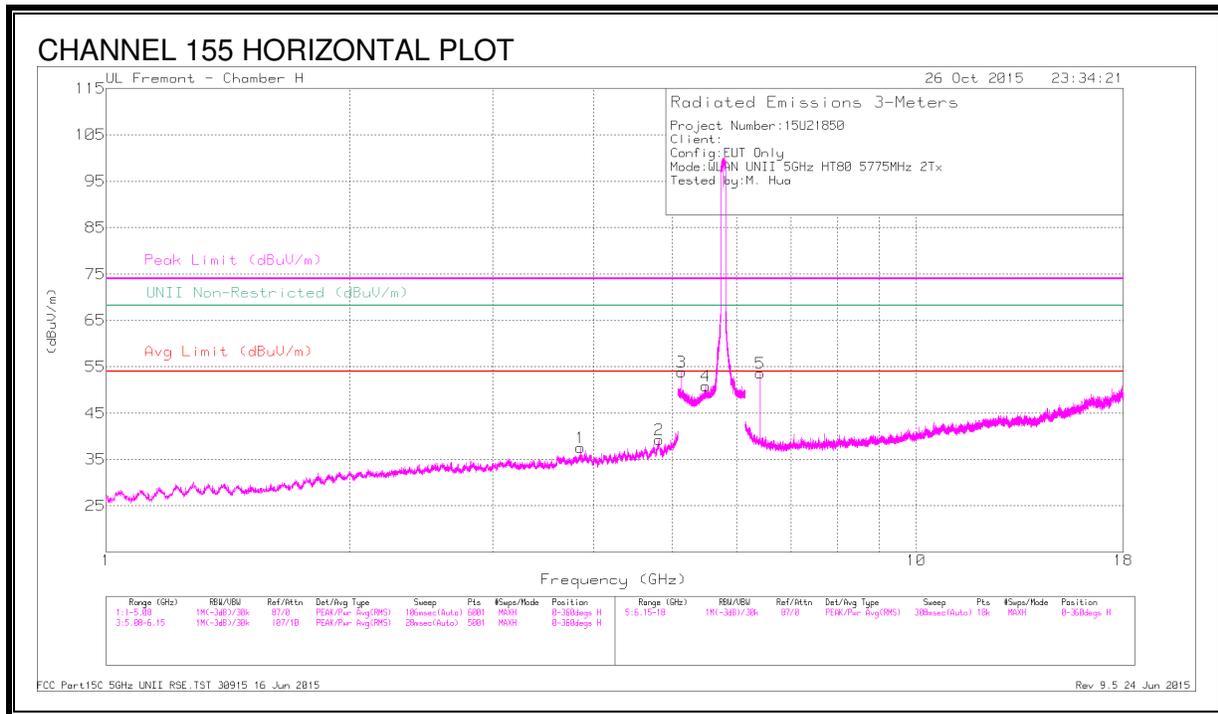

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.85	43.55	PK-U	33.5	-31.4	0	45.65	-	-	74	-28.35	-	-	224	195	H
	* 3.85	34.45	ADR	33.5	-31.4	.11	36.66	54	-17.34	-	-	-	-	224	195	H
2	* 4.813	43.52	PK-U	34.2	-30.8	0	46.92	-	-	74	-27.08	-	-	264	163	H
	* 4.813	31.74	ADR	34.2	-30.8	.11	35.25	54	-18.75	-	-	-	-	264	163	H
3	* 5.133	42.15	PK-U	34.4	-18.8	0	57.75	-	-	74	-16.25	-	-	334	290	H
	* 5.133	38.03	ADR	34.4	-18.8	.11	53.74	54	-26	-	-	-	-	334	290	H
4	5.49	33.77	PK-U	35.5	-19.2	0	50.07	-	-	-	-	68.2	-18.13	33	143	H
5	6.417	51.16	PK-U	35.6	-29.4	0	57.36	-	-	-	-	68.2	-10.84	327	155	H
6	6.417	49.63	PK-U	35.6	-29.4	0	55.83	-	-	-	-	68.2	-12.37	42	160	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**9.15. 802.11ac HT80 2TX BF MODE IN THE 5.8 GHz BAND**

**RESTRICTED BANDEDGE CHAIN 0 + 1 (LOW)**

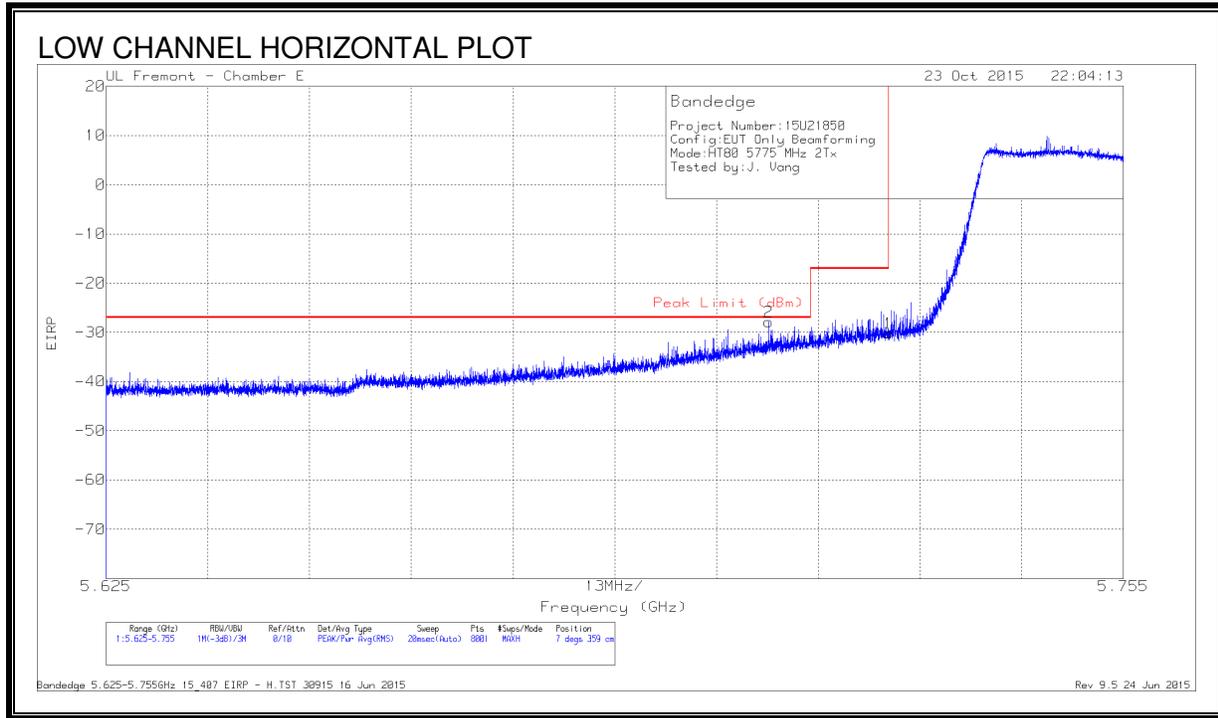


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.71	-54.51	Pk	34.7	-19.8	11.8	-27.81	-27	-.81	7	359	H
1	5.725	-56.94	Pk	34.7	-19.8	11.8	-30.24	-17	-13.24	7	359	H

Pk - Peak detector

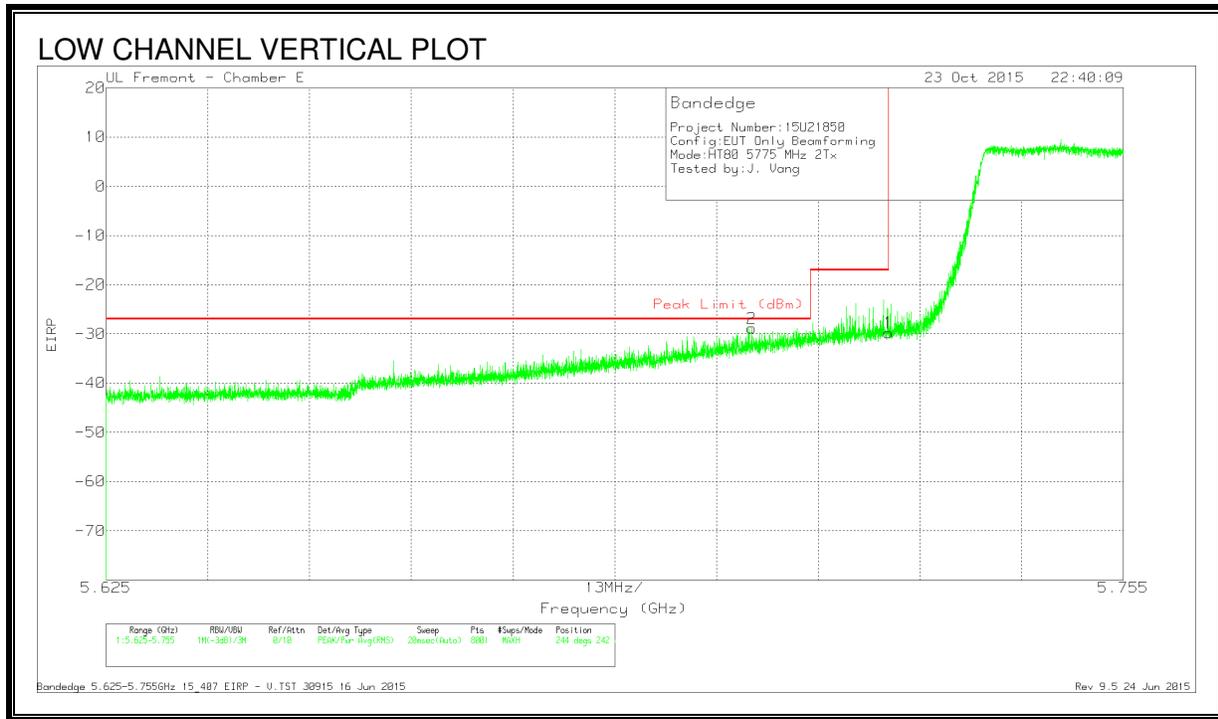


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.708	-55.4	Pk	34.7	-19.9	11.8	-28.8	-27	-1.8	244	242	V
1	5.725	-56.47	Pk	34.7	-19.8	11.8	-29.77	-17	-12.77	244	242	V

Pk - Peak detector

**RESTRICTED BANDEDGE CHAIN 0 + 1 (HIGH)**

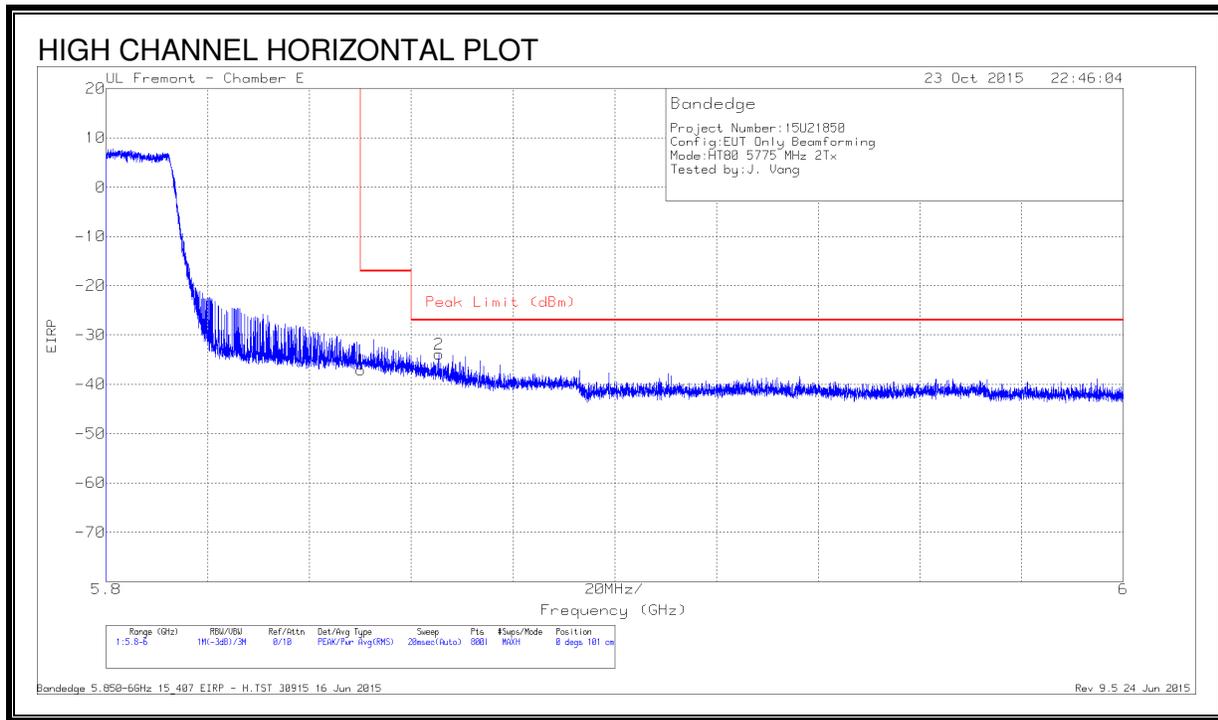


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.79	Pk	34.9	-20	11.8	-37.09	-17	-20.09	0	101	H
2	5.865	-60.73	Pk	34.9	-19.8	11.8	-33.83	-27	-6.83	0	101	H

Pk - Peak detector

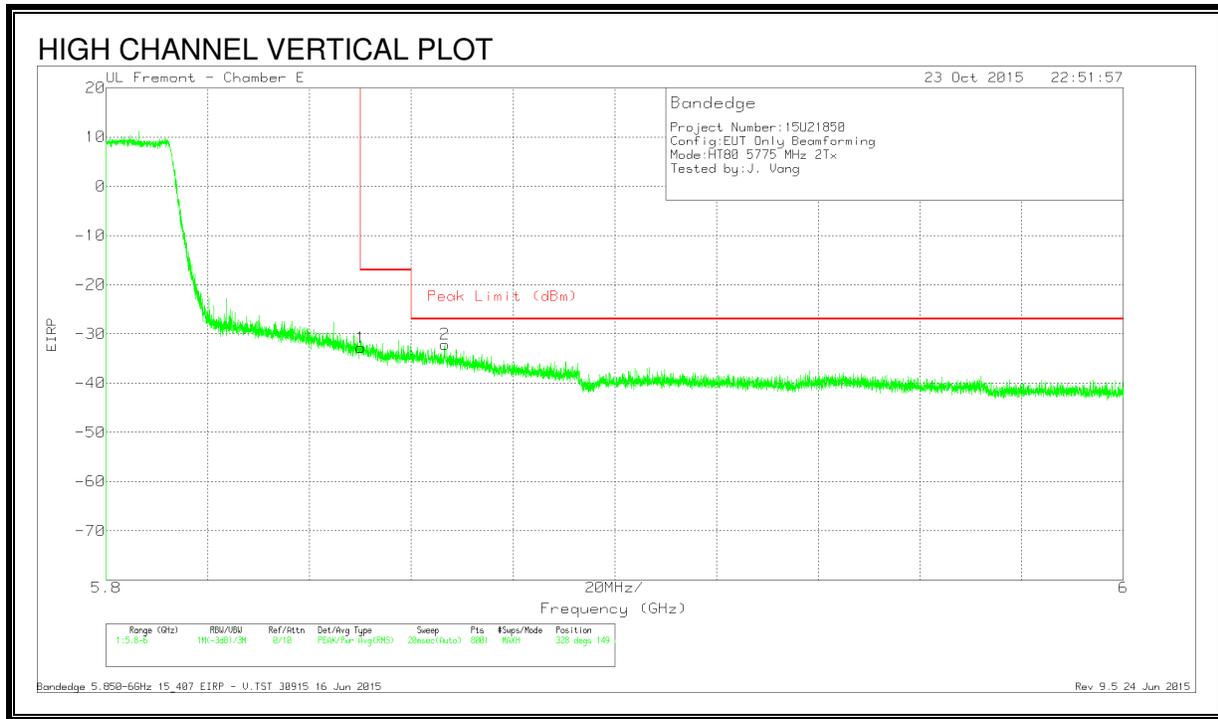



**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-59.51	Pk	34.9	-20	11.8	-32.81	-17	-15.81	328	149	V
2	5.867	-59	Pk	34.9	-19.8	11.8	-32.1	-27	-5.1	328	149	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

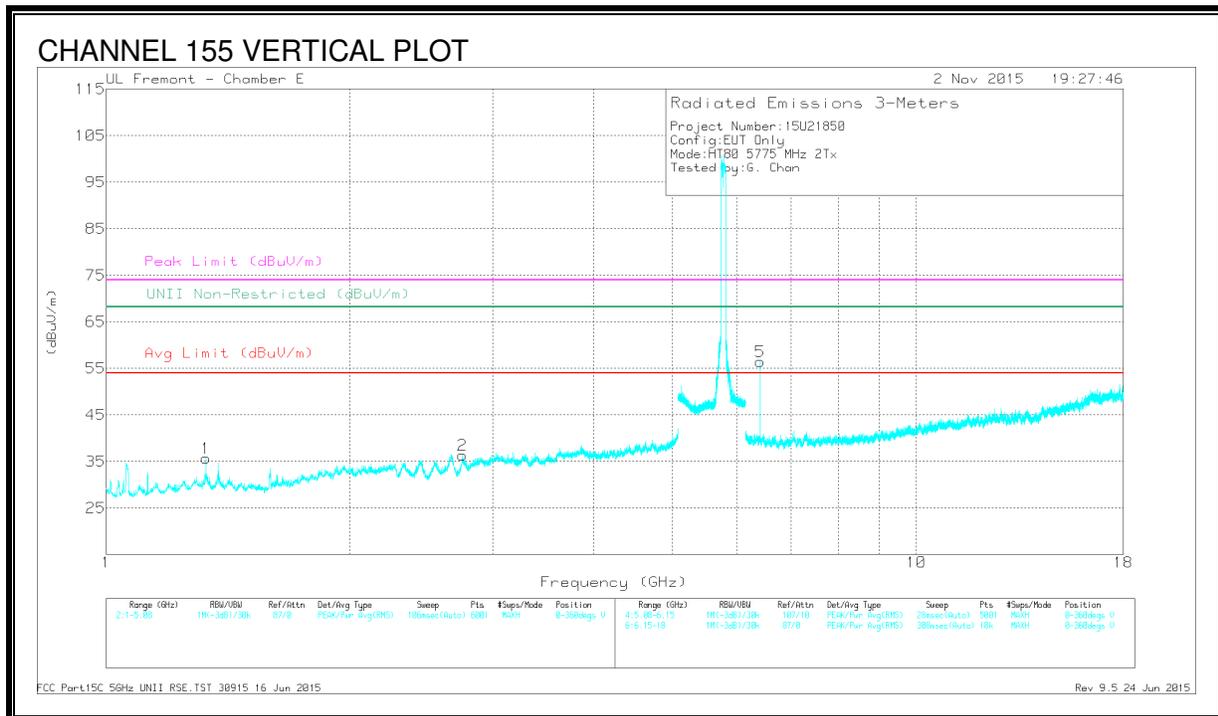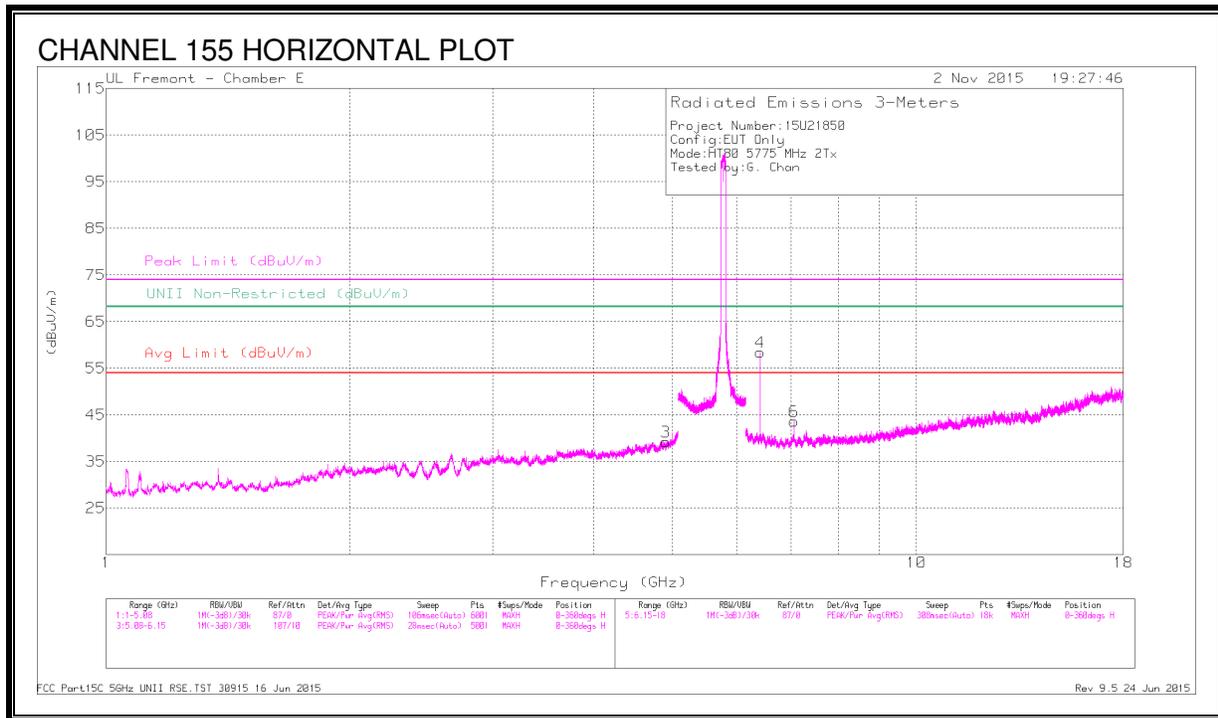

**DATA**

**Radiated Emissions**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.903	41.93	PK-U	34.1	-29.6	0	46.43	-	-	74	-27.57	-	-	295	343	H
	* 4.904	29.69	ADR	34.1	-29.6	.30	34.3	54	-19.7	-	-	-	-	295	343	H
1	* 1.329	52.09	PK-U	28.9	-35.3	0	45.69	-	-	74	-28.31	-	-	322	221	V
	* 1.327	34.07	ADR	28.9	-35.3	.30	27.78	54	-26.22	-	-	-	-	322	221	V
2	* 2.754	44.2	PK-U	32.4	-32.2	0	44.4	-	-	74	-29.6	-	-	90	143	V
	* 2.753	31.14	ADR	32.4	-32.3	.30	31.35	54	-22.65	-	-	-	-	90	143	V
4	6.416	53	PK-U	35.5	-27.6	0	60.9	-	-	-	-	68.2	-7.3	355	126	V
5	6.417	54.03	PK-U	35.5	-27.6	0	61.93	-	-	-	-	68.2	-6.27	264	117	H
	6.417	46.88	ADR	35.5	-27.6	.30	54.89	-	-	-	-	-	-	264	117	H
6	7.058	40.78	PK-U	35.6	-27.3	0	49.08	-	-	-	-	68.2	-19.12	278	193	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**RESTRICTED BANDEDGE CHAIN 0 + 2 (LOW)**

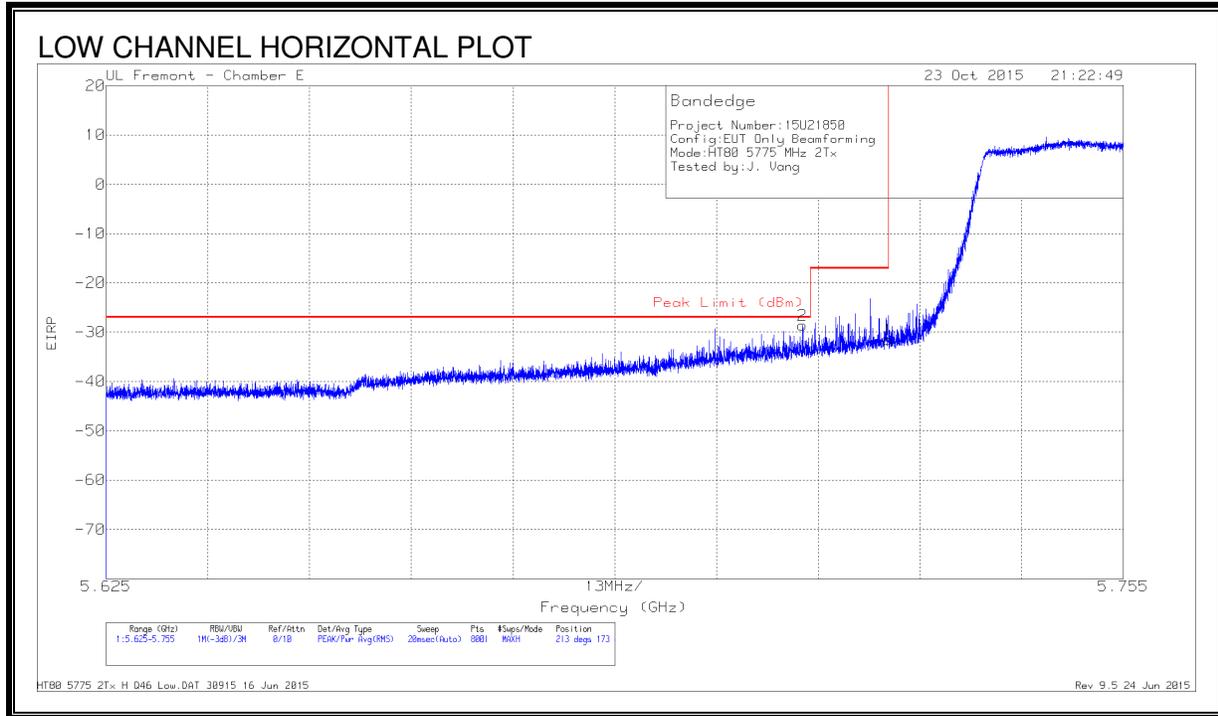


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.714	-55.31	Pk	34.7	-19.8	11.8	-28.61	-27	-1.61	213	173	H
1	5.725	-58.27	Pk	34.7	-19.8	11.8	-31.57	-17	-14.57	213	173	H

Pk - Peak detector

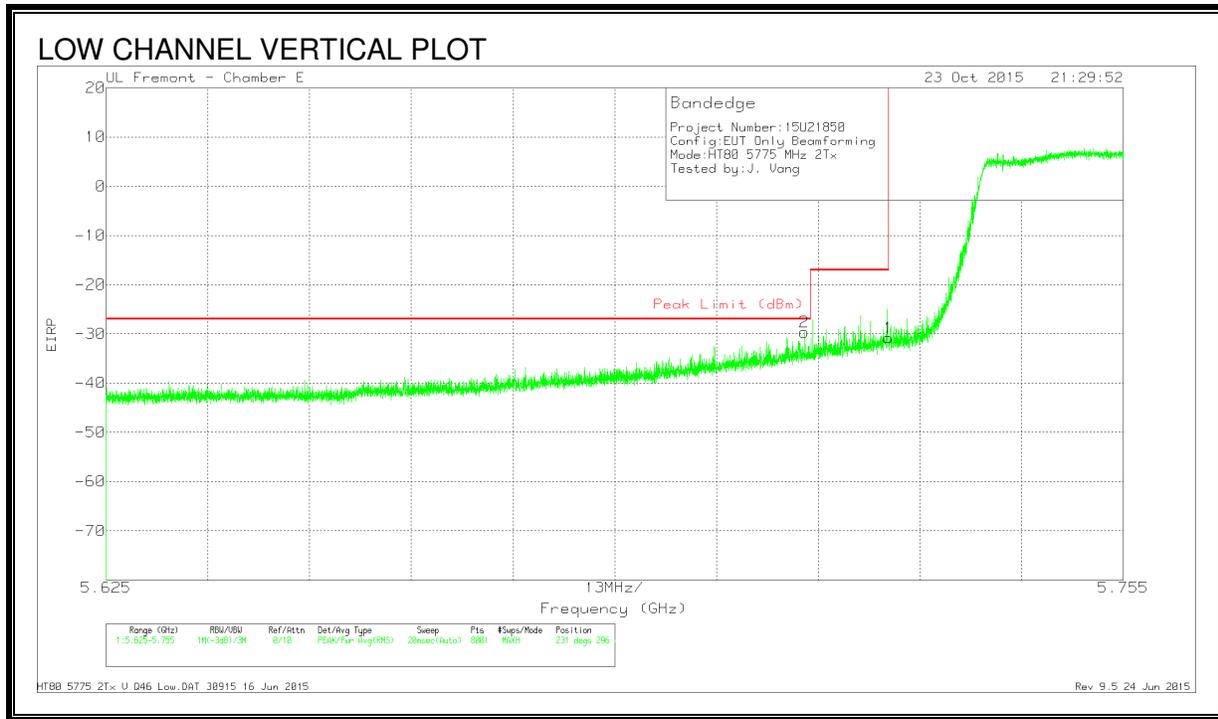


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.714	-56.34	Pk	34.7	-19.8	11.8	-29.64	-27	-2.64	231	296	V
1	5.725	-57.53	Pk	34.7	-19.8	11.8	-30.83	-17	-13.83	231	296	V

Pk - Peak detector

**RESTRICTED BANDEDGE CHAIN 0 + 2 (HIGH)**

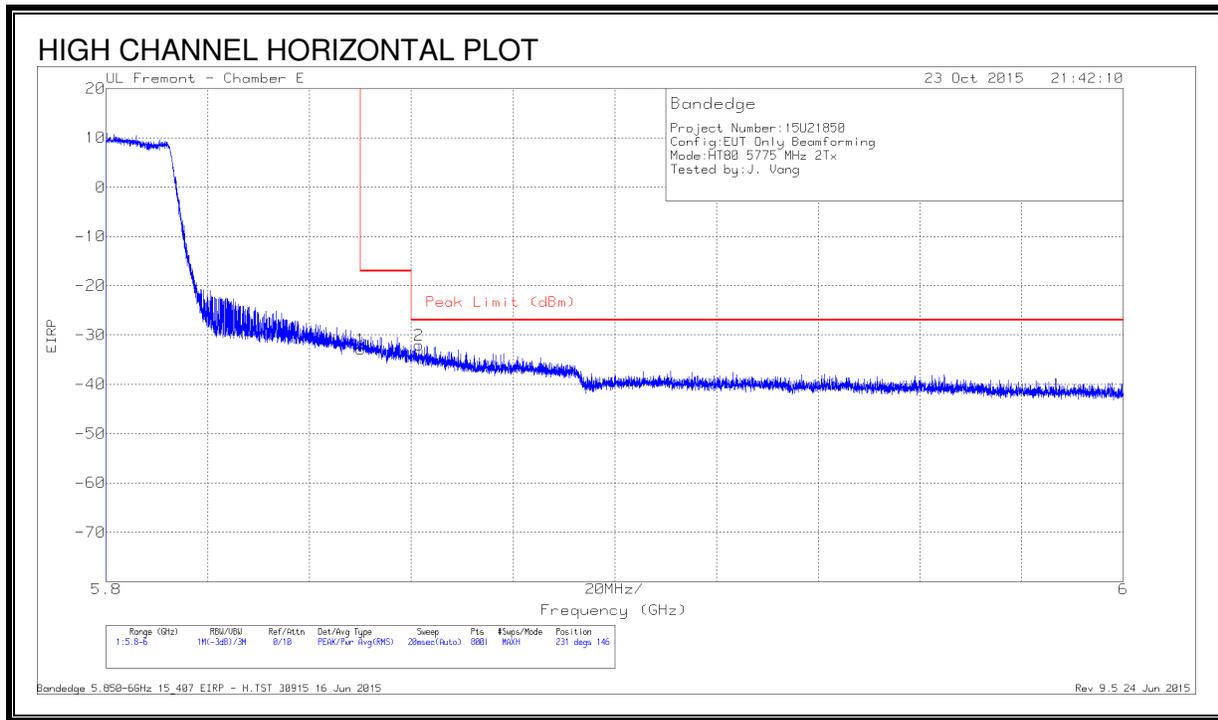


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-59.6	Pk	34.9	-20	11.8	-32.9	-17	-15.9	231	146	H
2	5.861	-58.99	Pk	34.9	-19.8	11.8	-32.09	-27	-5.09	231	146	H

Pk - Peak detector

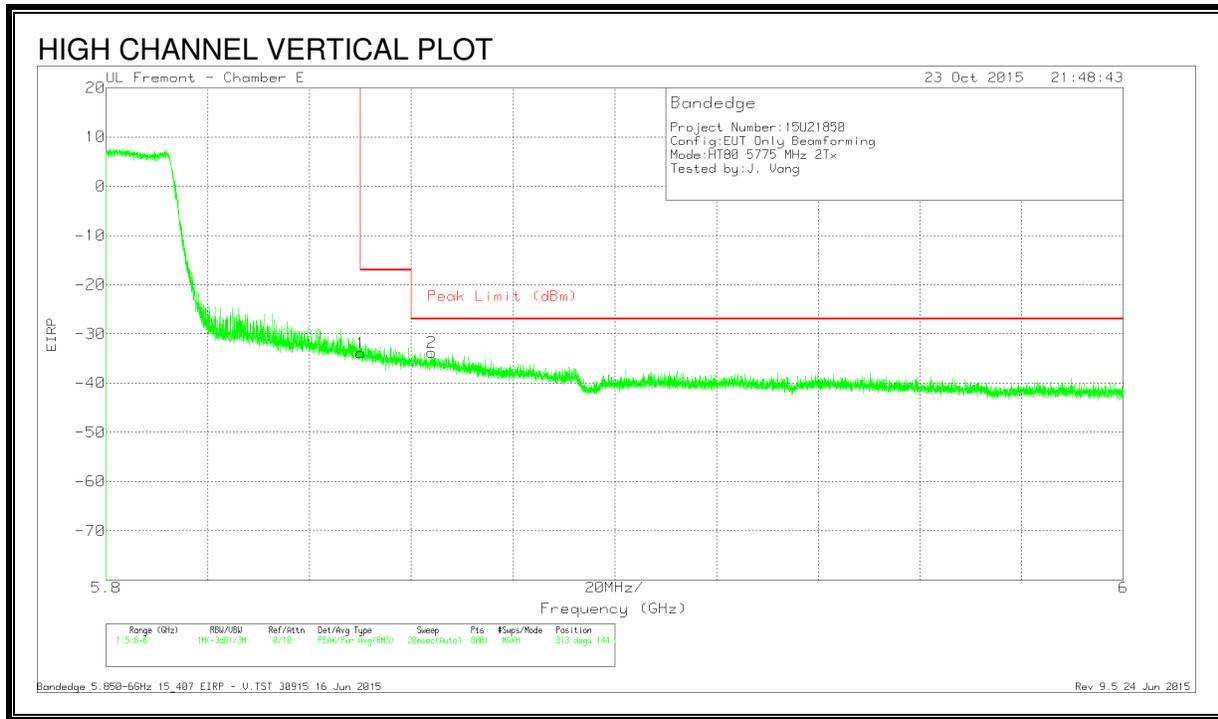



**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-60.61	Pk	34.9	-20	11.8	-33.91	-17	-16.91	313	144	V
2	5.864	-60.67	Pk	34.9	-19.8	11.8	-33.77	-27	-6.77	313	144	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

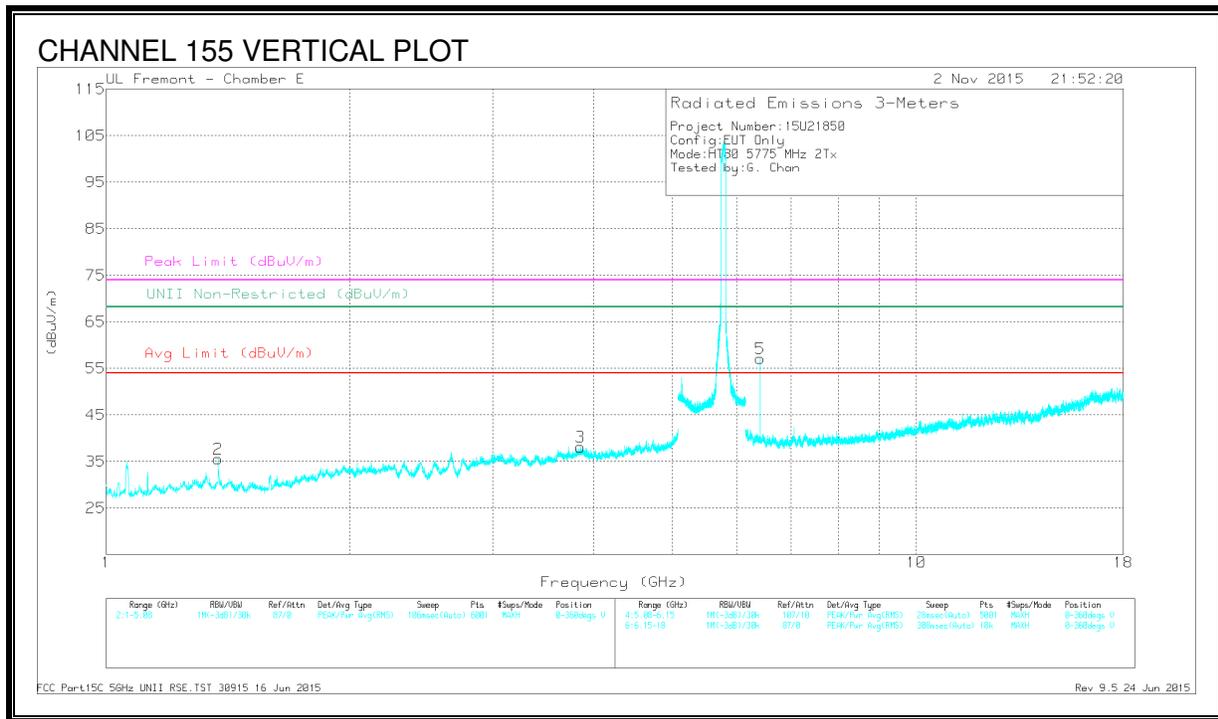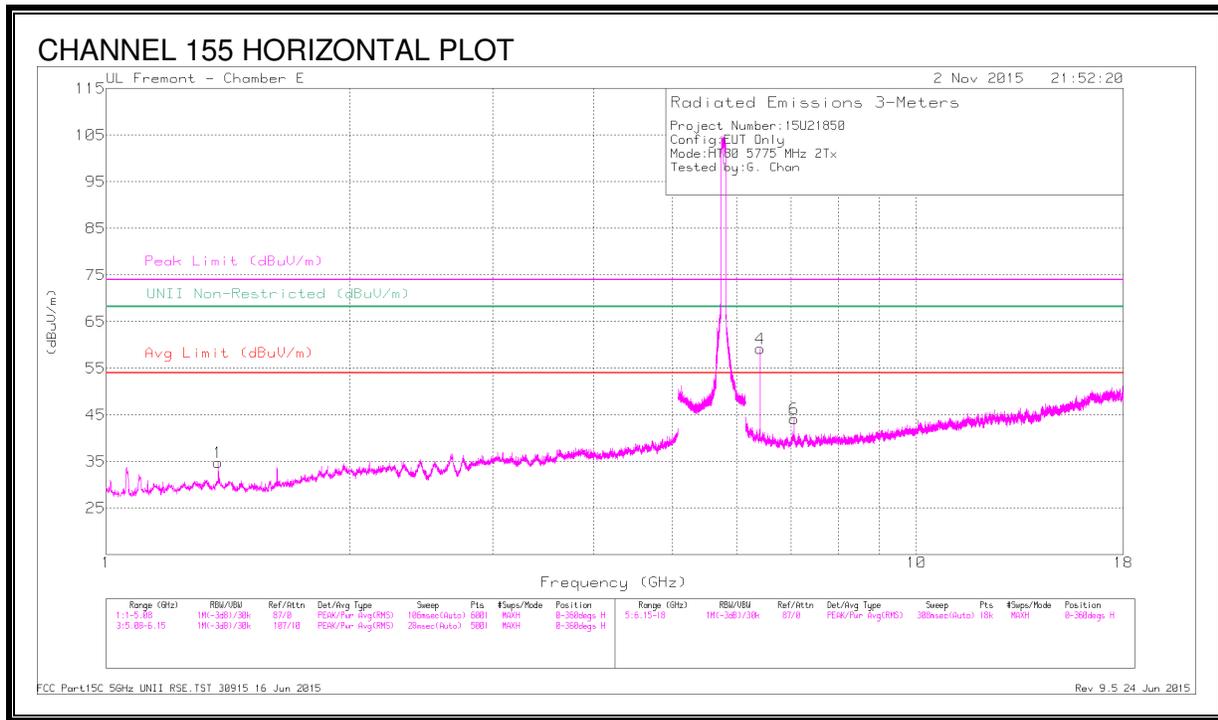

**DATA**

**Radiated Emissions**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.375	48.31	PK-U	28.6	-34.8	0	42.11	-	-	74	-31.89	-	-	8	118	H
	* 1.375	39.9	ADR	28.6	-34.8	.30	33.81	54	-20.19	-	-	-	-	8	118	H
2	* 1.375	48.4	PK-U	28.6	-34.8	0	42.2	-	-	74	-31.8	-	-	76	215	V
	* 1.375	38.44	ADR	28.6	-34.8	.30	32.35	54	-21.65	-	-	-	-	76	215	V
3	* 3.85	42.24	PK-U	33.5	-29.8	0	45.94	-	-	74	-28.06	-	-	169	191	V
	* 3.85	32.24	ADR	33.5	-29.8	.30	36.05	54	-17.95	-	-	-	-	169	191	V
4	6.416	54.22	PK-U	35.5	-27.6	0	62.12	-	-	-	-	68.2	-6.08	294	125	H
5	6.416	52.36	PK-U	35.5	-27.6	0	60.26	-	-	-	-	68.2	-7.94	356	121	V
6	7.059	41.5	PK-U	35.6	-27.3	0	49.8	-	-	-	-	68.2	-18.4	162	400	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**RESTRICTED BANDEDGE CHAIN 1 + 2 (LOW)**

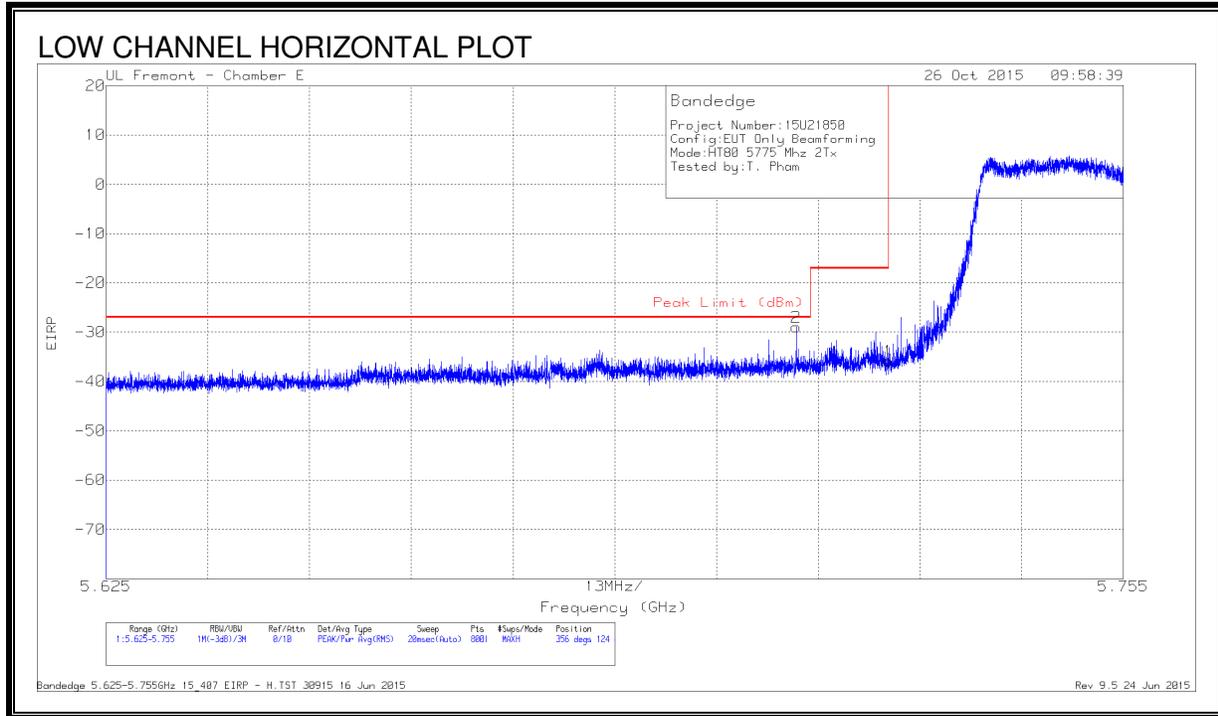


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.713	-55.41	Pk	34.7	-20.1	11.8	-29.01	-27	-2.01	356	124	H
1	5.725	-62.27	Pk	34.7	-20.1	11.8	-35.87	-17	-18.87	356	124	H

Pk - Peak detector

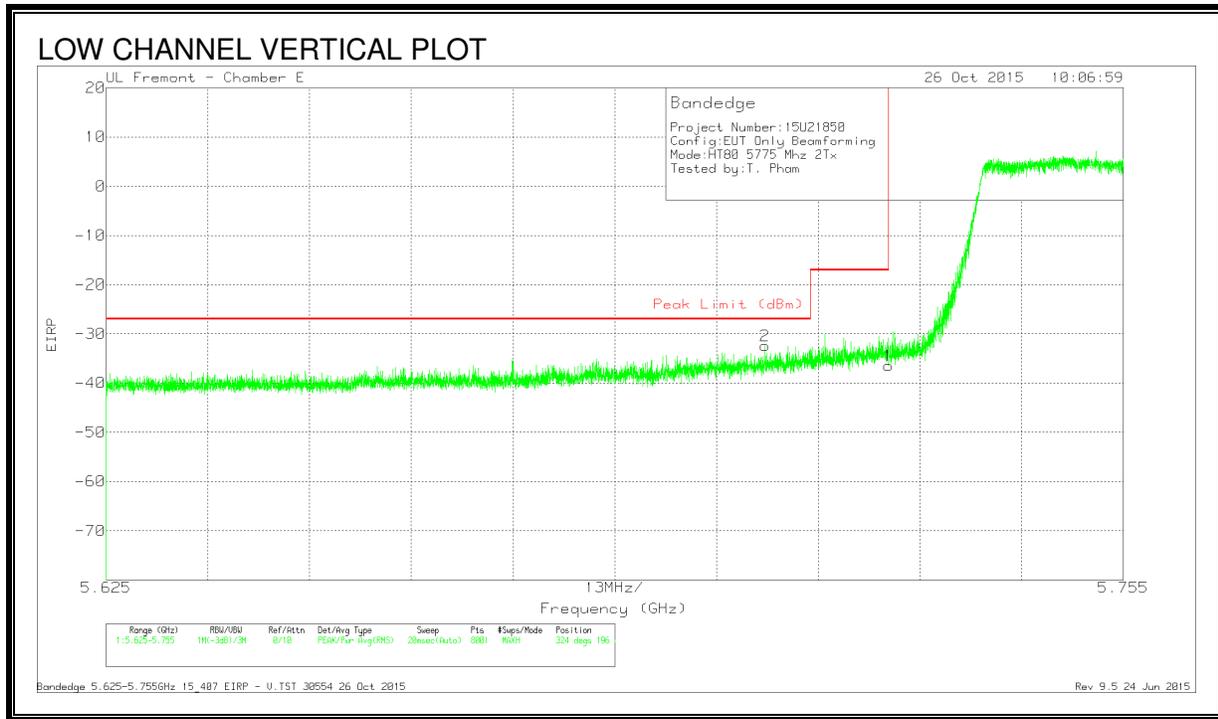


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.709	-58.81	Pk	34.7	-20.1	11.8	-32.41	-27	-5.41	324	196	V
1	5.725	-62.9	Pk	34.7	-20.1	11.8	-36.5	-17	-19.5	324	196	V

Pk - Peak detector

**RESTRICTED BANDEDGE CHAIN 1 + 2 (HIGH)**

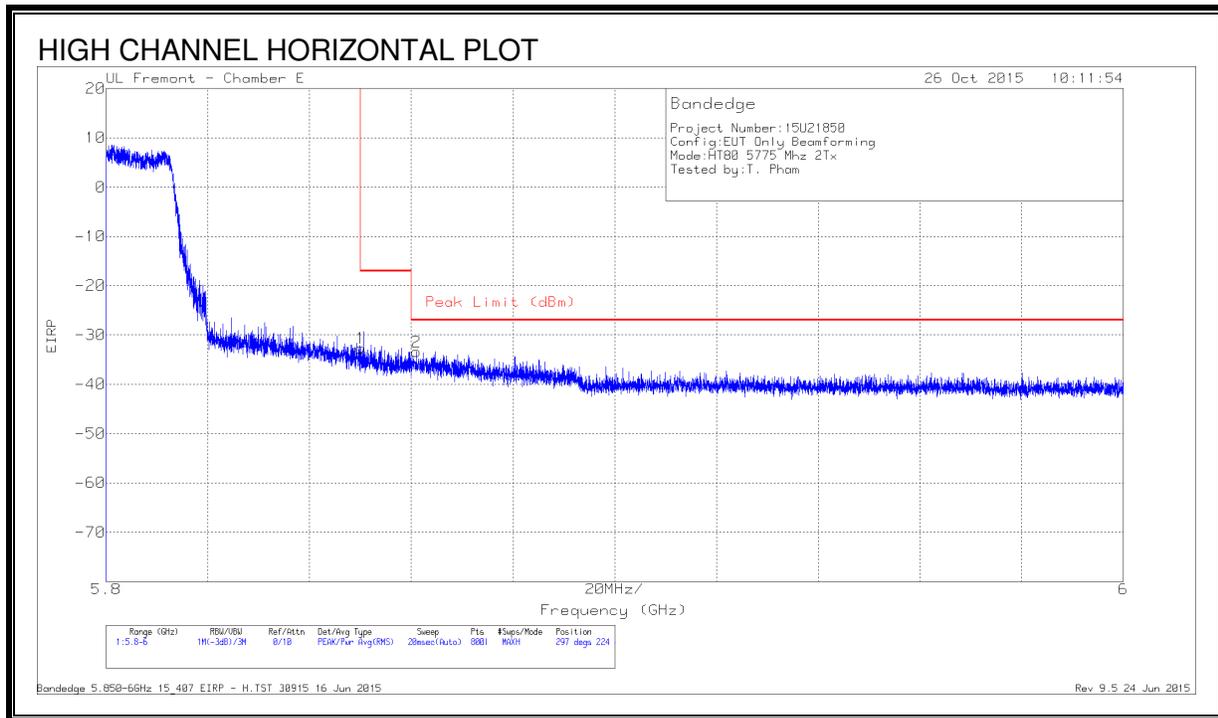


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-59.09	Pk	34.9	-20.3	11.8	-32.69	-17	-15.69	297	224	H
2	5.861	-59.65	Pk	34.9	-20.4	11.8	-33.35	-27	-6.35	297	224	H

Pk - Peak detector

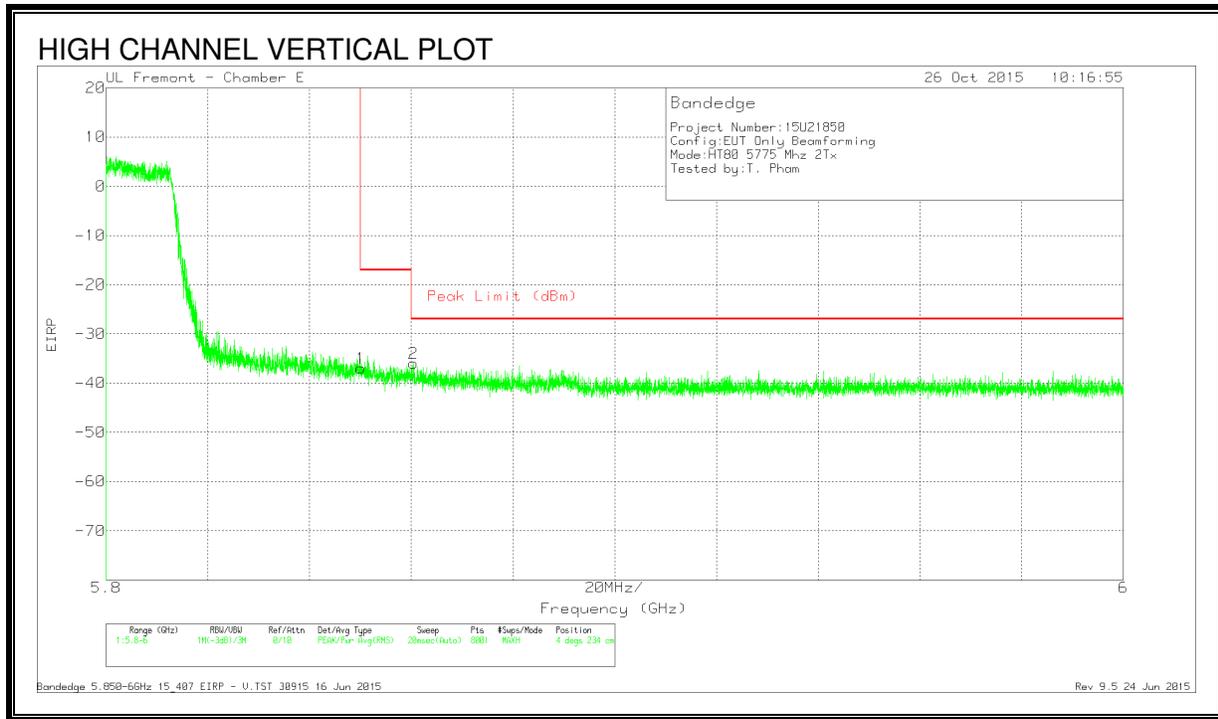



**DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.39	Pk	34.9	-20.3	11.8	-36.99	-17	-19.99	4	234	V
2	5.86	-62.3	Pk	34.9	-20.4	11.8	-36	-27	-9	4	234	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

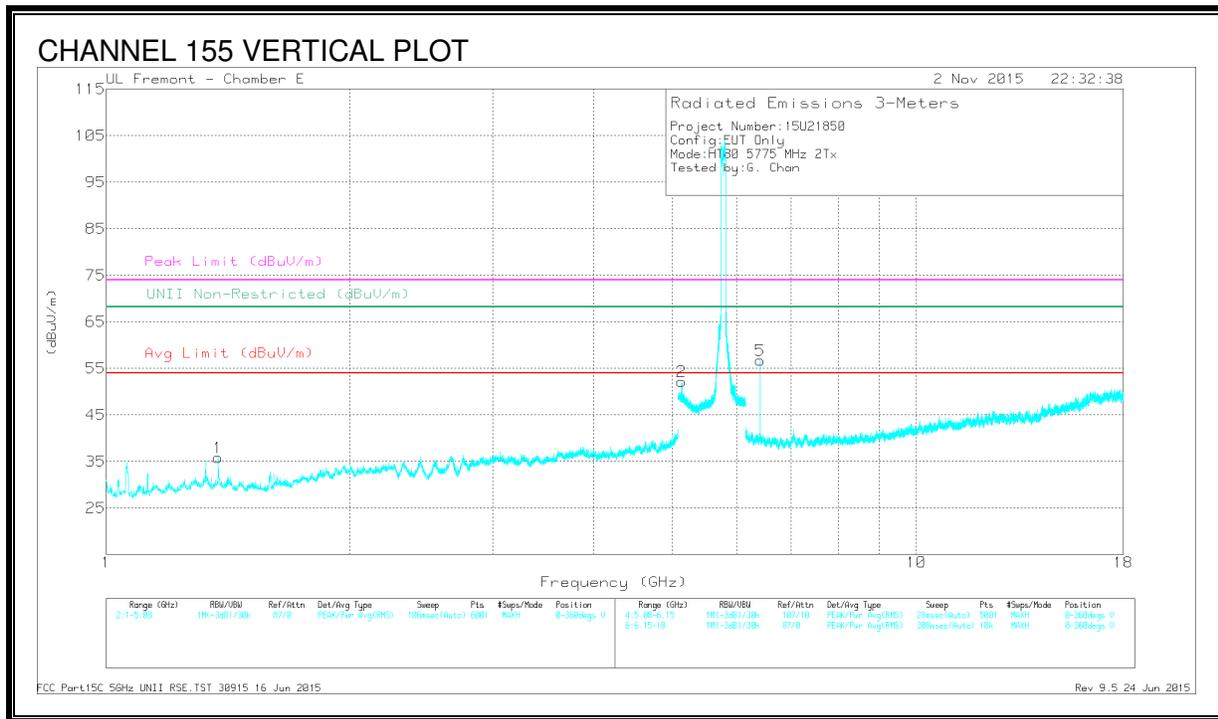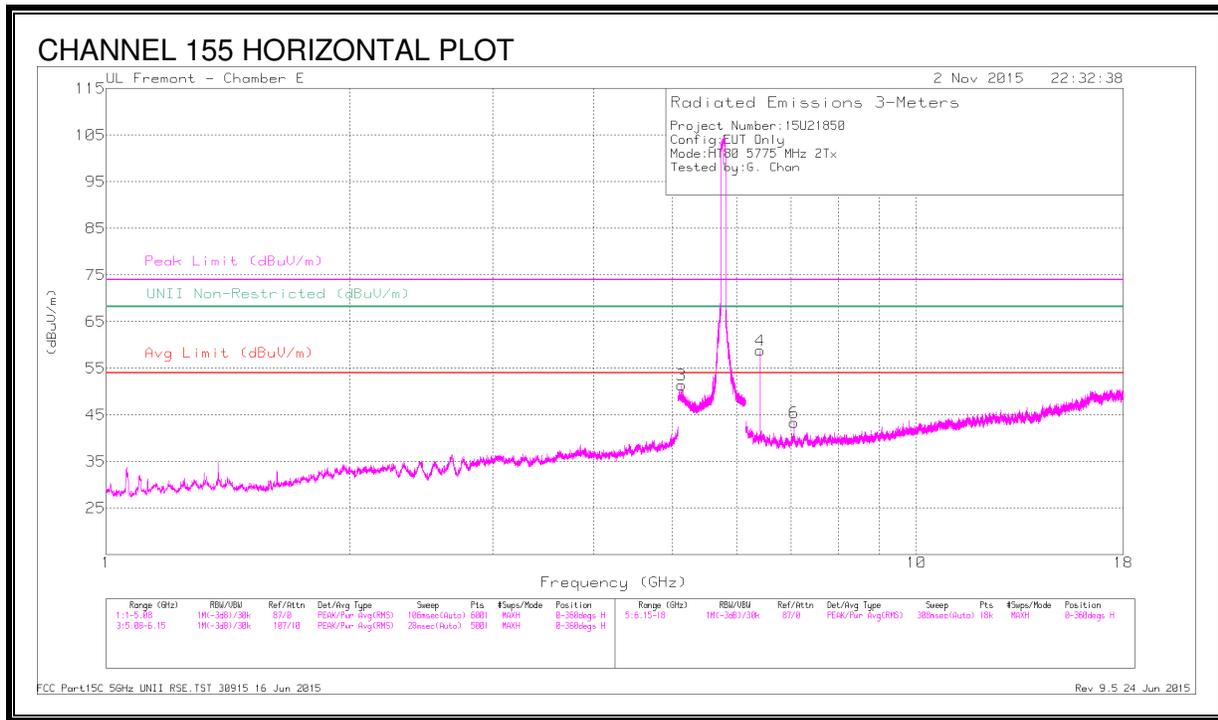

**DATA**

**Radiated Emissions**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.375	47.89	PK-U	28.6	-34.8	0	41.69	-	-	74	-32.31	-	-	86	125	V
	* 1.375	39.06	ADR	28.6	-34.8	.30	32.97	54	-21.03	-	-	-	-	86	125	V
3	* 5.134	42.96	PK-U	34.3	-18.8	0	58.46	-	-	74	-15.54	-	-	356	145	H
	* 5.133	31.96	ADR	34.3	-18.8	.30	47.57	54	-6.43	-	-	-	-	356	145	H
2	* 5.133	44.05	PK-U	34.3	-18.8	0	59.55	-	-	74	-14.45	-	-	273	204	V
	* 5.133	33.65	ADR	34.3	-18.8	.30	49.26	54	-4.74	-	-	-	-	273	204	V
4	6.416	54.14	PK-U	35.5	-27.6	0	62.04	-	-	-	-	68.2	-6.16	289	125	H
5	6.417	53.07	PK-U	35.5	-27.6	0	60.97	-	-	-	-	68.2	-7.23	355	128	V
6	7.059	39.74	PK-U	35.6	-27.3	0	48.04	-	-	-	-	68.2	-20.16	169	234	H


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**9.16. 802.11ac HT80 3TX CDD MODE IN THE 5.8 GHz BAND**

**RESTRICTED BANDEDGE (LOW)**

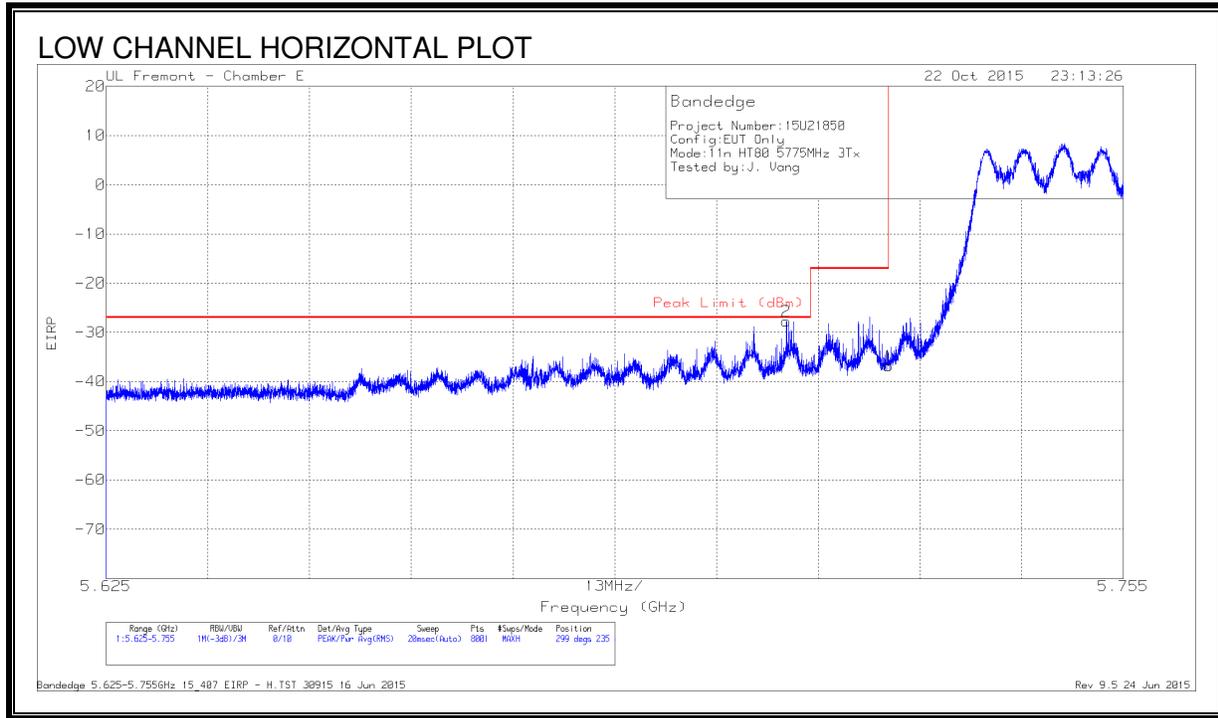


**DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.712	-54.43	Pk	34.7	-19.8	11.8	-27.73	-27	-.73	299	235	H
1	5.725	-63.51	Pk	34.7	-19.8	11.8	-36.81	-17	-19.81	299	235	H

Pk - Peak detector

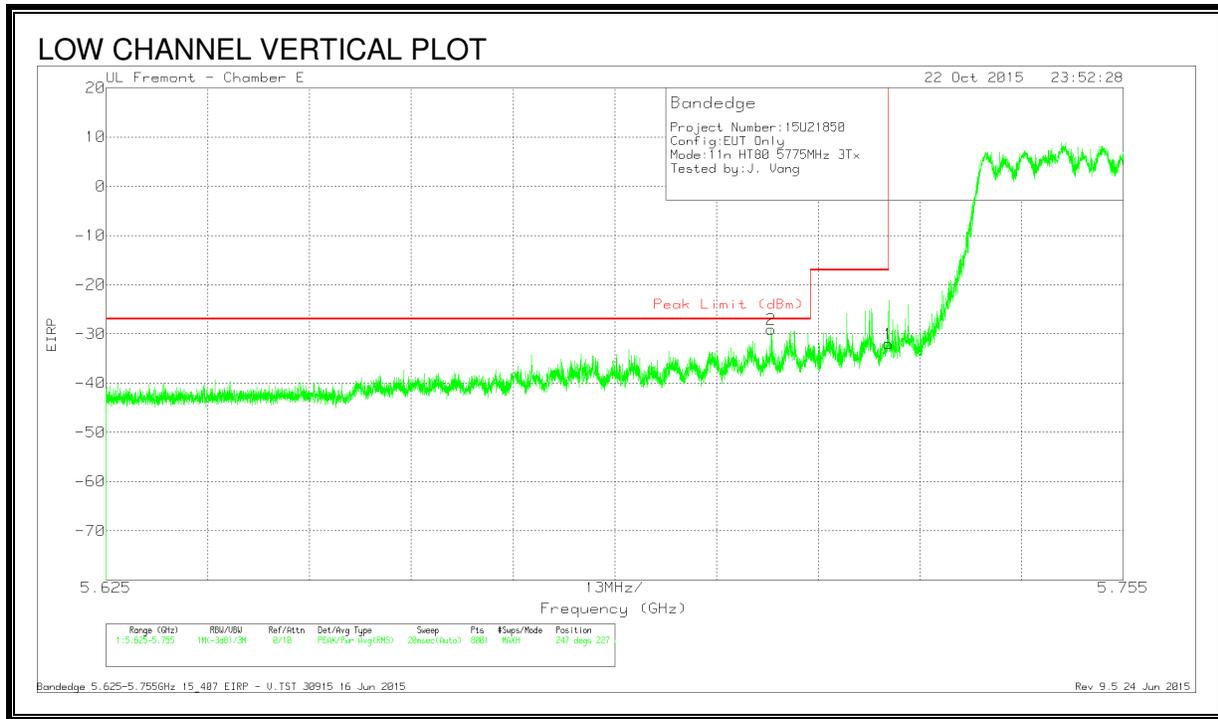


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.71	-55.84	Pk	34.7	-19.8	11.8	-29.14	-27	-2.14	247	227	V
1	5.725	-58.75	Pk	34.7	-19.8	11.8	-32.05	-17	-15.05	247	227	V

Pk - Peak detector

**RESTRICTED BANDEDGE (HIGH)**

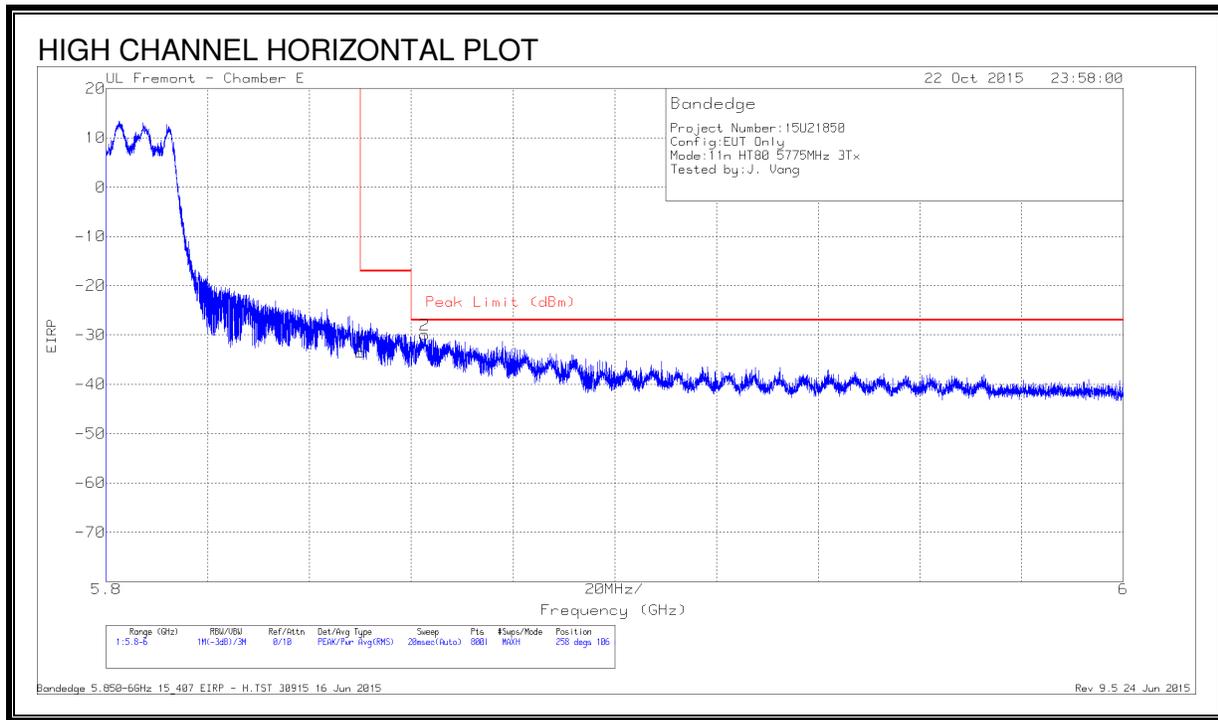


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-60.22	Pk	34.9	-20	11.8	-33.52	-17	-16.52	258	106	H
2	5.863	-56.84	Pk	34.9	-19.8	11.8	-29.94	-27	-2.94	258	106	H

Pk - Peak detector

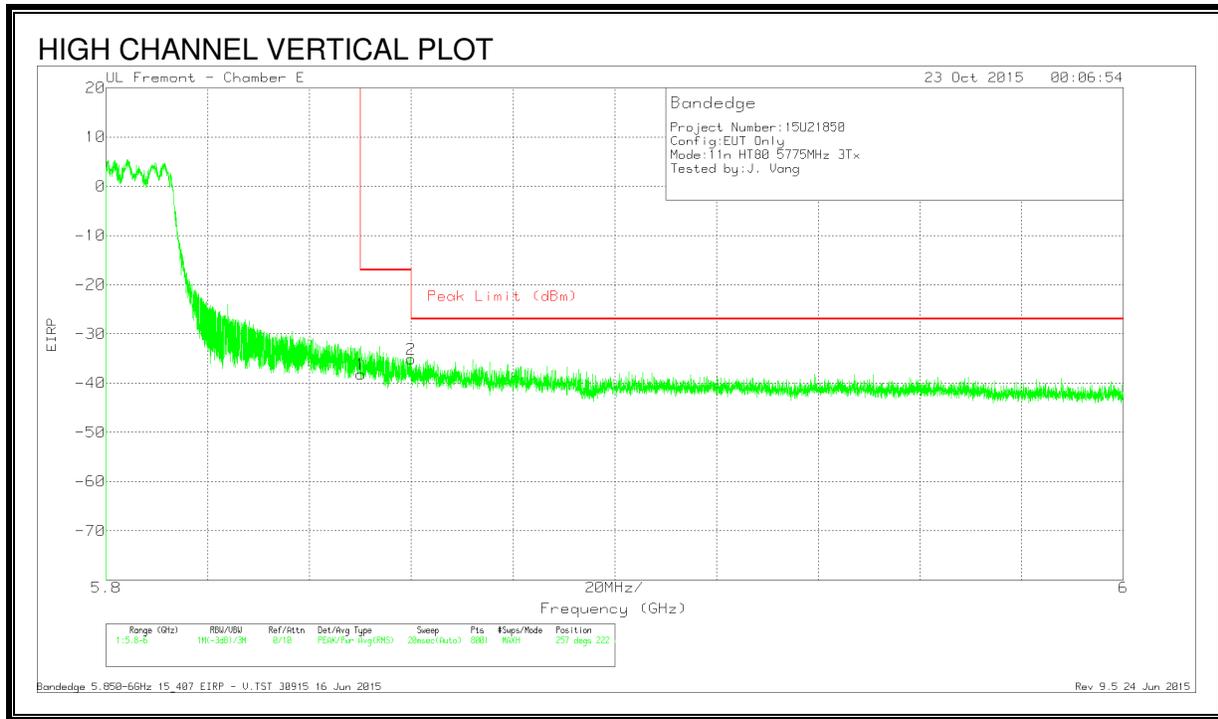



**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-64.83	Pk	34.9	-20	11.8	-38.13	-17	-21.13	257	222	V
2	5.86	-61.96	Pk	34.9	-19.8	11.8	-35.06	-27	-8.06	257	222	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

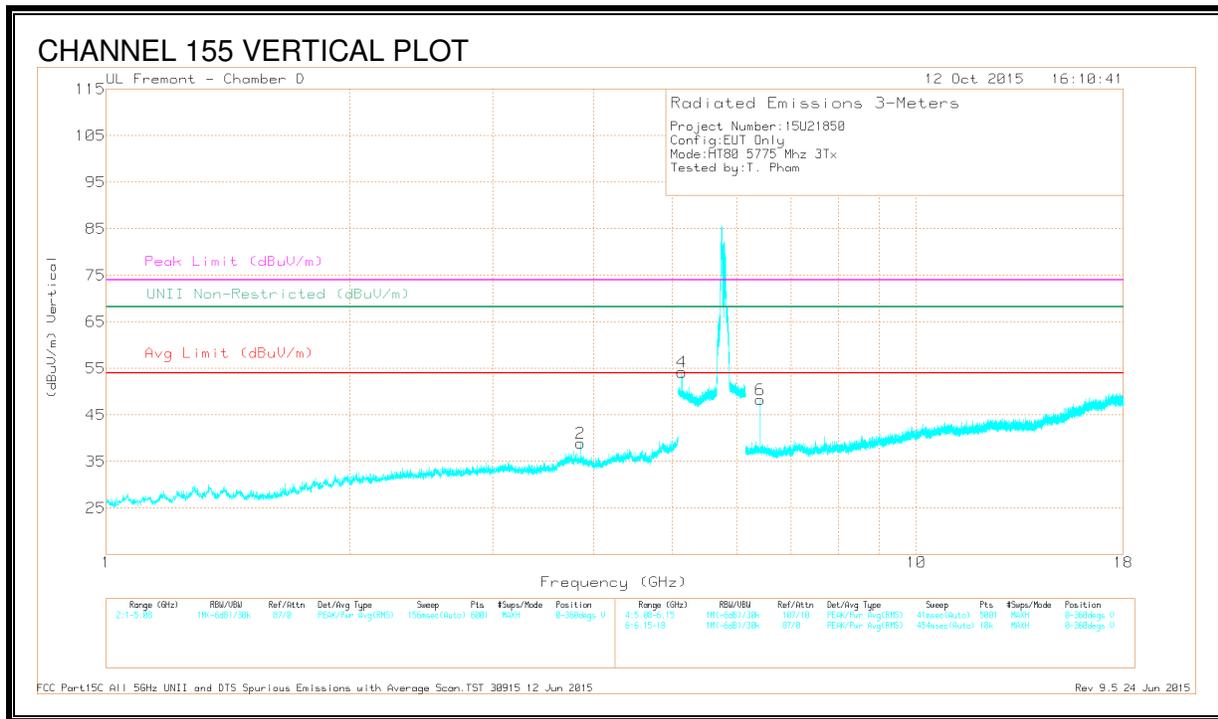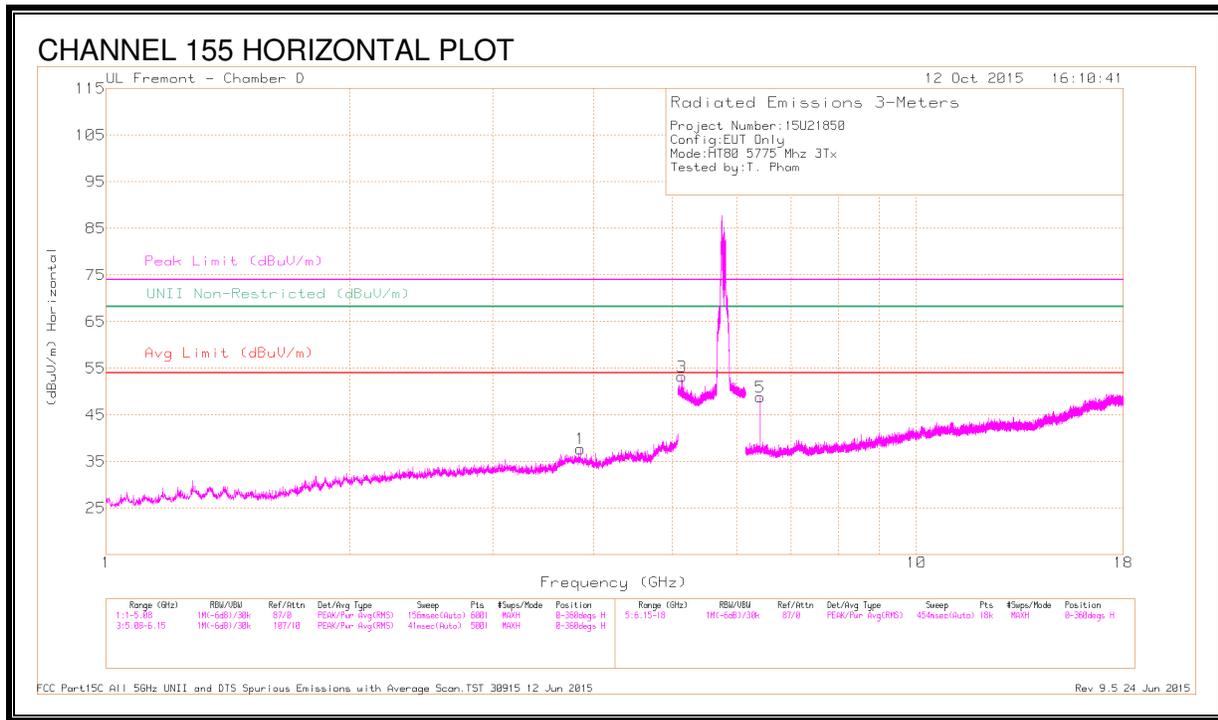

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.85	40.7	PK-U	33.4	-28.9	0	45.2	-	-	74	-28.8	-	-	296	111	H
	* 3.85	31.16	ADR	33.4	-28.9	.17	35.78	54	-18.22	-	-	-	-	296	111	H
2	* 3.85	41.23	PK-U	33.4	-28.9	0	45.73	-	-	74	-28.27	-	-	246	233	V
	* 3.85	32.31	ADR	33.4	-28.9	.17	36.93	54	-17.07	-	-	-	-	246	233	V
3	* 5.133	45.11	PK-U	34.3	-18.5	0	60.91	-	-	74	-13.09	-	-	253	147	H
	* 5.133	35.9	ADR	34.3	-18.5	.17	51.82	54	-2.18	-	-	-	-	253	147	H
4	* 5.134	45.52	PK-U	34.3	-18.5	0	61.32	-	-	74	-12.68	-	-	14	203	V
	* 5.133	36.74	ADR	34.3	-18.5	.17	52.66	54	-1.34	-	-	-	-	14	203	V
5	6.417	43.75	PK-U	35.4	-26.4	0	52.75	-	-	-	-	68.2	-15.45	351	204	H
6	6.417	43.48	PK-U	35.4	-26.4	0	52.48	-	-	-	-	68.2	-15.72	117	228	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**9.17. 802.11ac HT80 3TX BF MODE IN THE 5.8 GHz BAND**

**RESTRICTED BANDEDGE (LOW)**

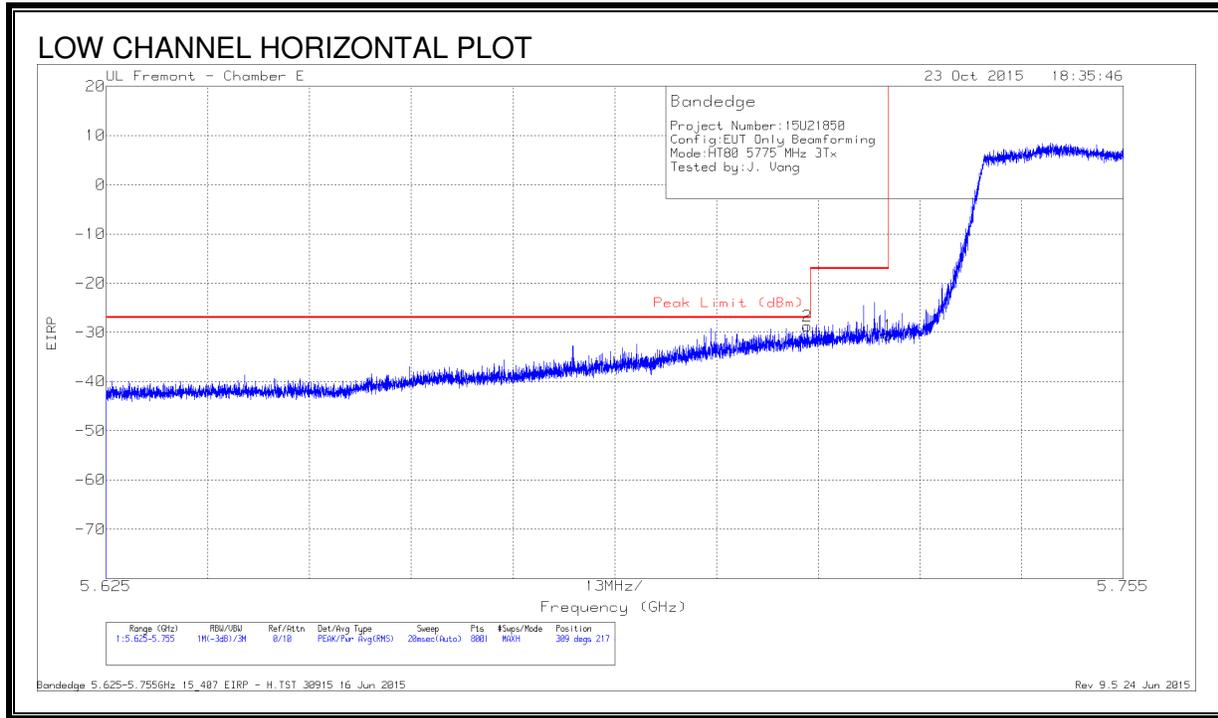


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.715	-55.44	Pk	34.7	-19.8	11.8	-28.74	-27	-1.74	309	217	H
1	5.725	-57.32	Pk	34.7	-19.8	11.8	-30.62	-17	-13.62	309	217	H

Pk - Peak detector

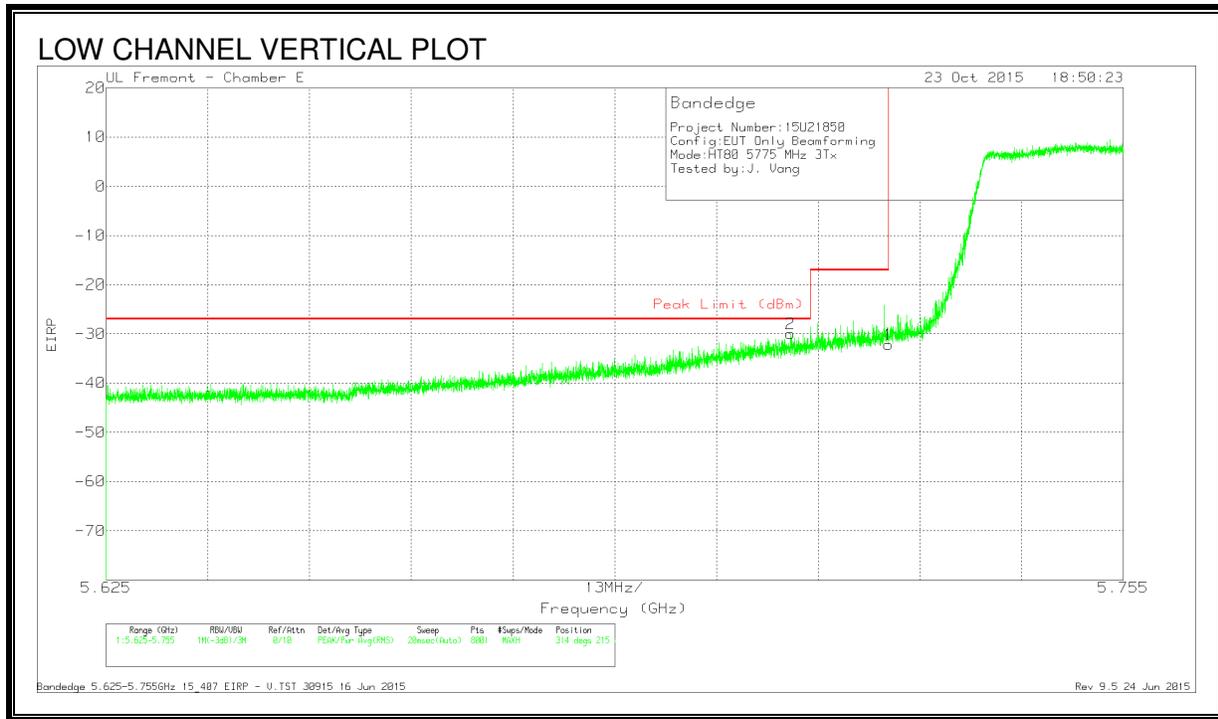


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.712	-56.61	Pk	34.7	-19.8	11.8	-29.91	-27	-2.91	314	215	V
1	5.725	-58.87	Pk	34.7	-19.8	11.8	-32.17	-17	-15.17	314	215	V

Pk - Peak detector

**RESTRICTED BANDEDGE (HIGH)**

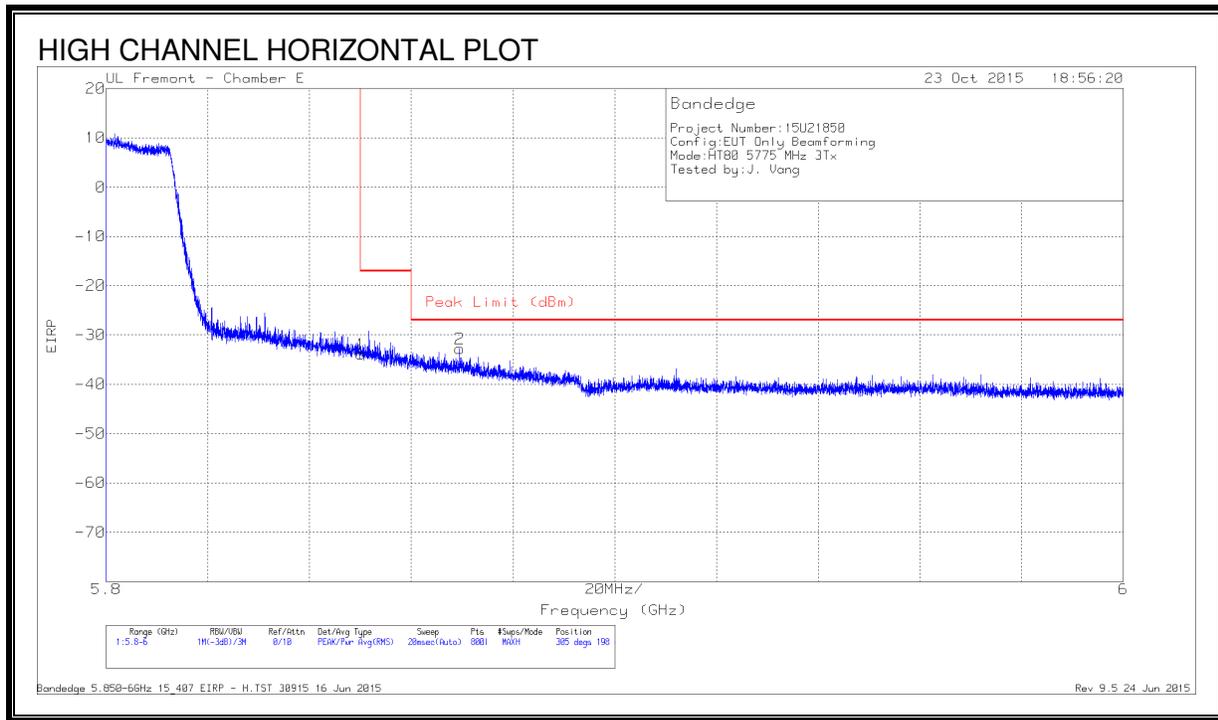


**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-60.59	Pk	34.9	-20	11.8	-33.89	-17	-16.89	305	198	H
2	5.87	-59.83	Pk	34.9	-19.7	11.8	-32.83	-27	-5.83	305	198	H

Pk - Peak detector

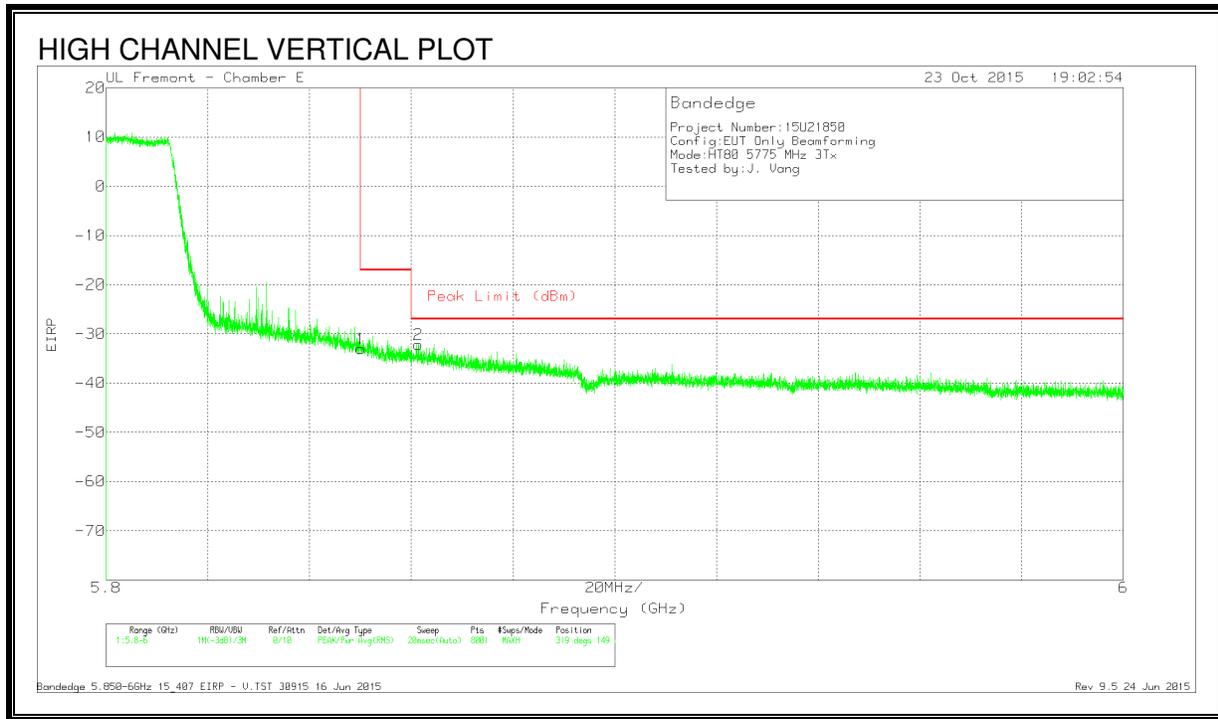



**DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-59.74	Pk	34.9	-20	11.8	-33.04	-17	-16.04	319	149	V
2	5.861	-59.07	Pk	34.9	-19.8	11.8	-32.17	-27	-5.17	319	149	V

Pk - Peak detector

**CHANNEL 155 HARMONICS AND SPURIOUS EMISSIONS**

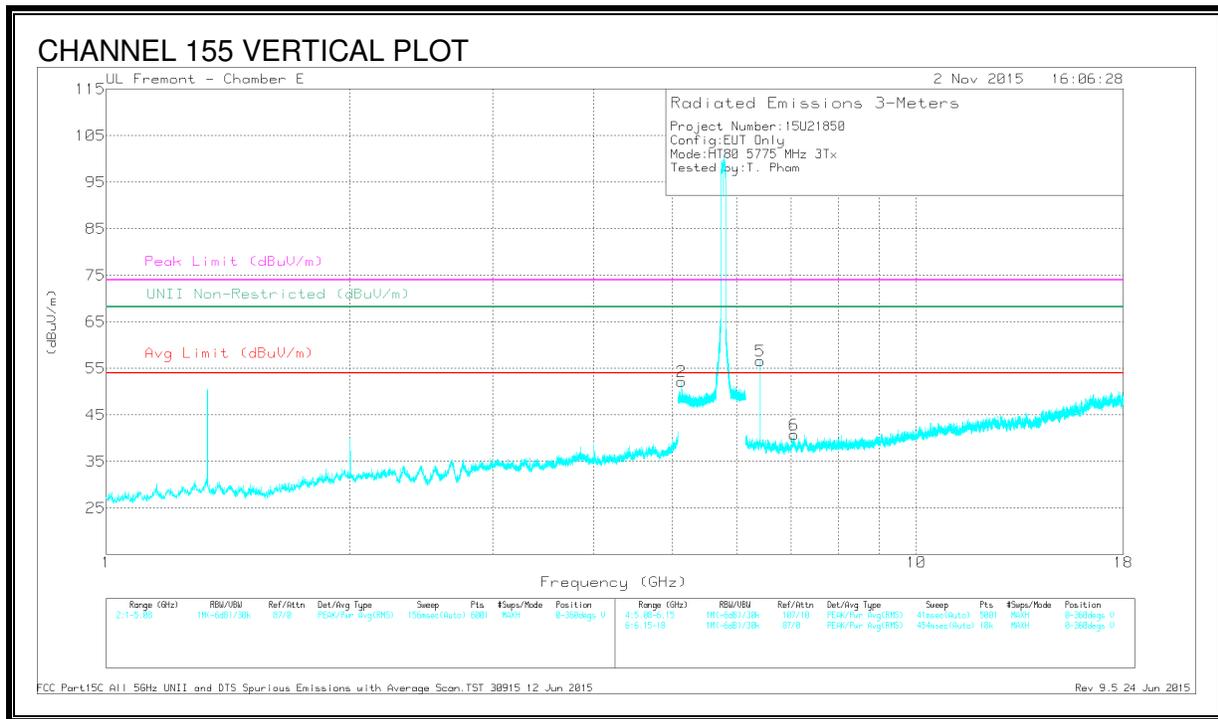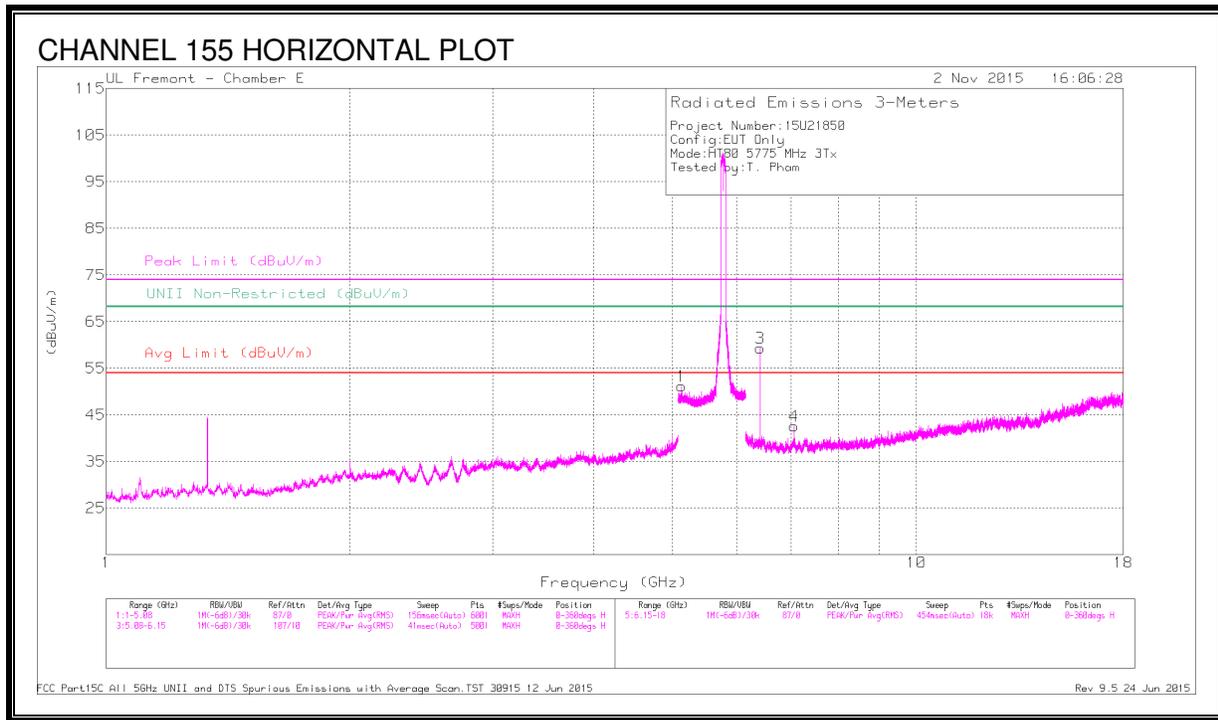

**DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.133	45.89	PK-U	34.3	-20.5		59.69	-	-	74	-14.31	-	-	144	201	H
	* 5.133	34.81	ADR	34.3	-20.5	.27	48.61	54	-5.39	-	-	-	-	144	201	H
2	* 5.133	47.01	PK-U	34.3	-20.5		60.81	-	-	74	-13.19	-	-	266	219	V
	* 5.133	35.67	ADR	34.3	-20.5	.27	49.47	54	-4.53	-	-	-	-	266	219	V
3	6.417	54.58	PK-U	35.5	-27.6		62.48	-	-	-	-	68.2	-5.72	289	196	H
5	6.417	53.17	PK-U	35.5	-27.6		61.07	-	-	-	-	68.2	-7.13	358	121	V
4	7.058	41.44	PK-U	35.6	-27.3		49.74	-	-	-	-	68.2	-18.46	273	134	H
6	7.058	40.04	PK-U	35.6	-27.3		48.34	-	-	-	-	68.2	-19.86	298	137	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak



ADR - U-NII AD primary method, RMS average

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 12 Jun 2015

Rev 9.5 24 Jun 2015

### 9.18. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

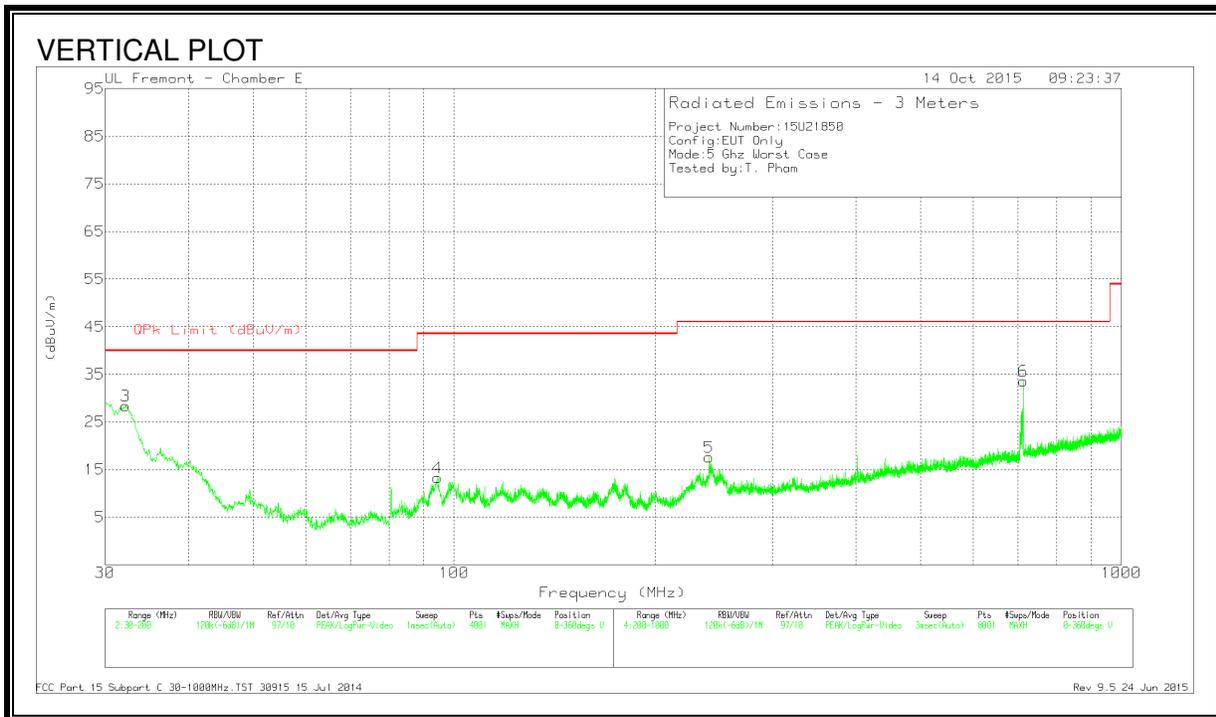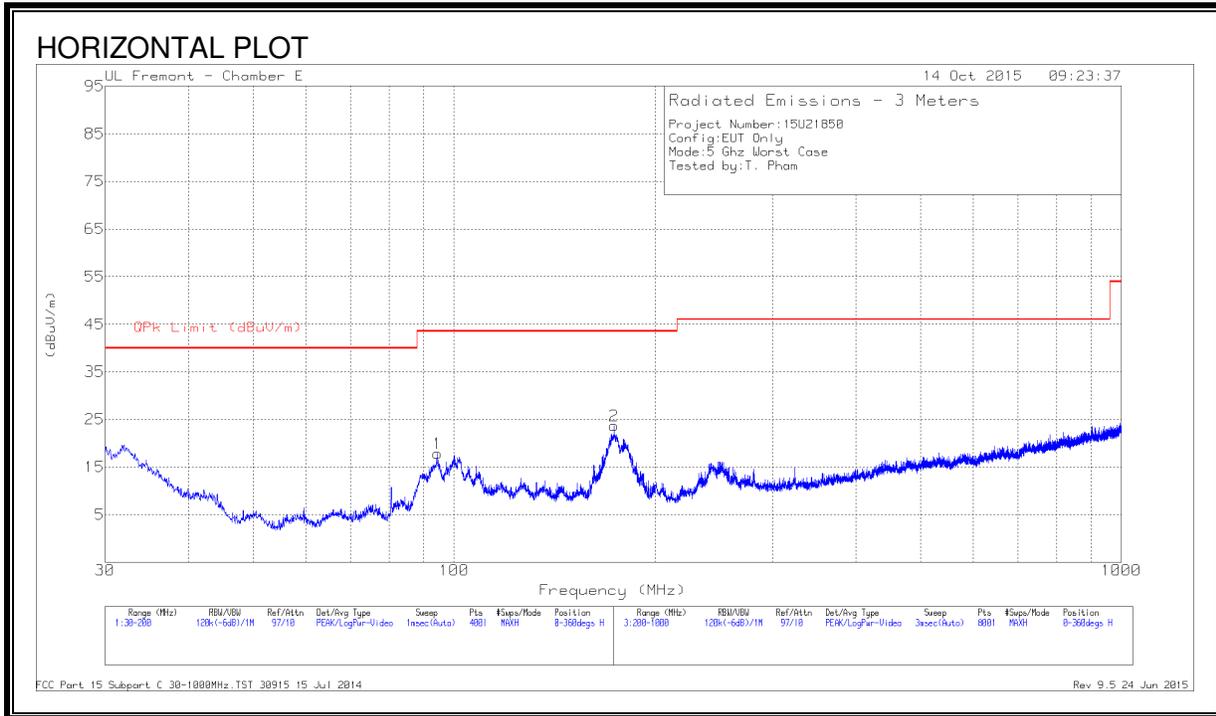

**HORIZONTAL AND VERTICAL DATA**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T408 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 241.2	36.75	Pk	11.4	-30.6	17.55	46.02	-28.47	0-360	100	V
3	32.21	40.25	Pk	20	-31.8	28.45	40	-11.55	0-360	100	V
1	94.4725	40.48	Pk	8.8	-31.4	17.88	43.52	-25.64	0-360	201	H
4	94.5575	35.74	Pk	8.9	-31.4	13.24	43.52	-30.28	0-360	100	V
2	173.6075	43.03	Pk	11.6	-30.9	23.73	43.52	-19.79	0-360	100	H
6	713.2	42.49	Pk	20.2	-29.1	33.59	46.02	-12.43	0-360	201	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band



Pk - Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 15 Jul 2014

Rev 9.5 24 Jun 2015

### 9.19. WORST-CASE ABOVE 18 GHz

#### SPURIOUS EMISSIONS 18000 TO 26000 MHz (WORST-CASE CONFIGURATION)

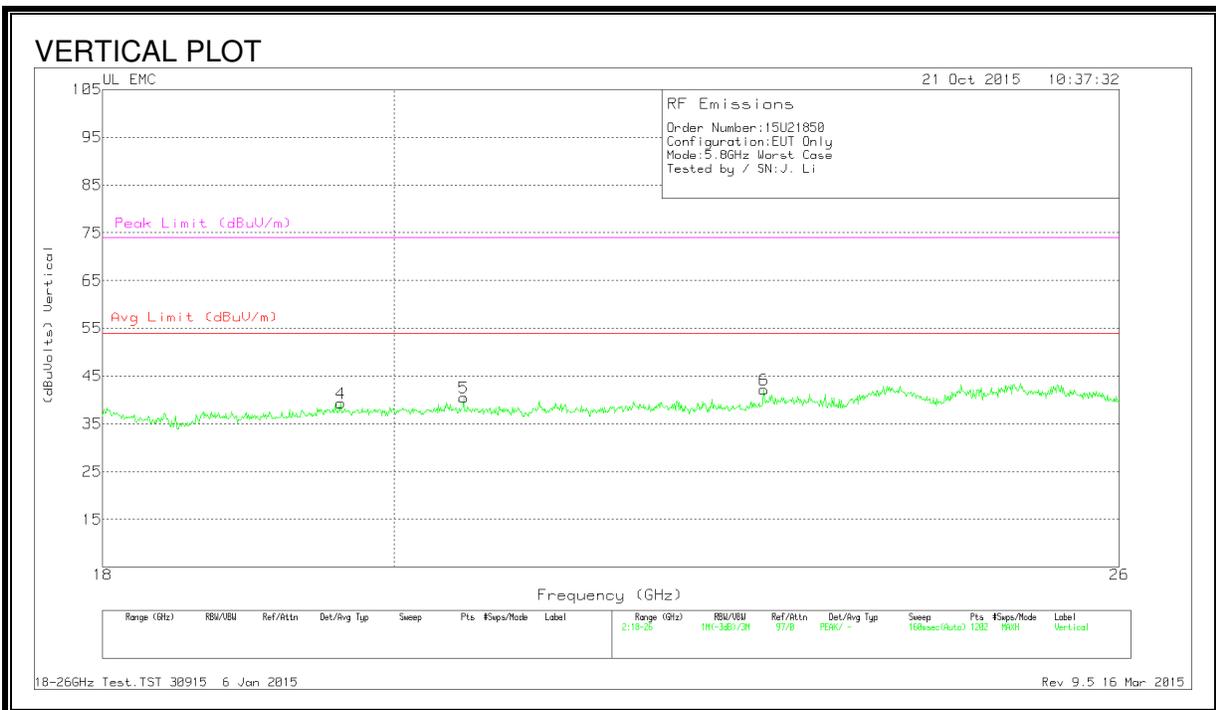
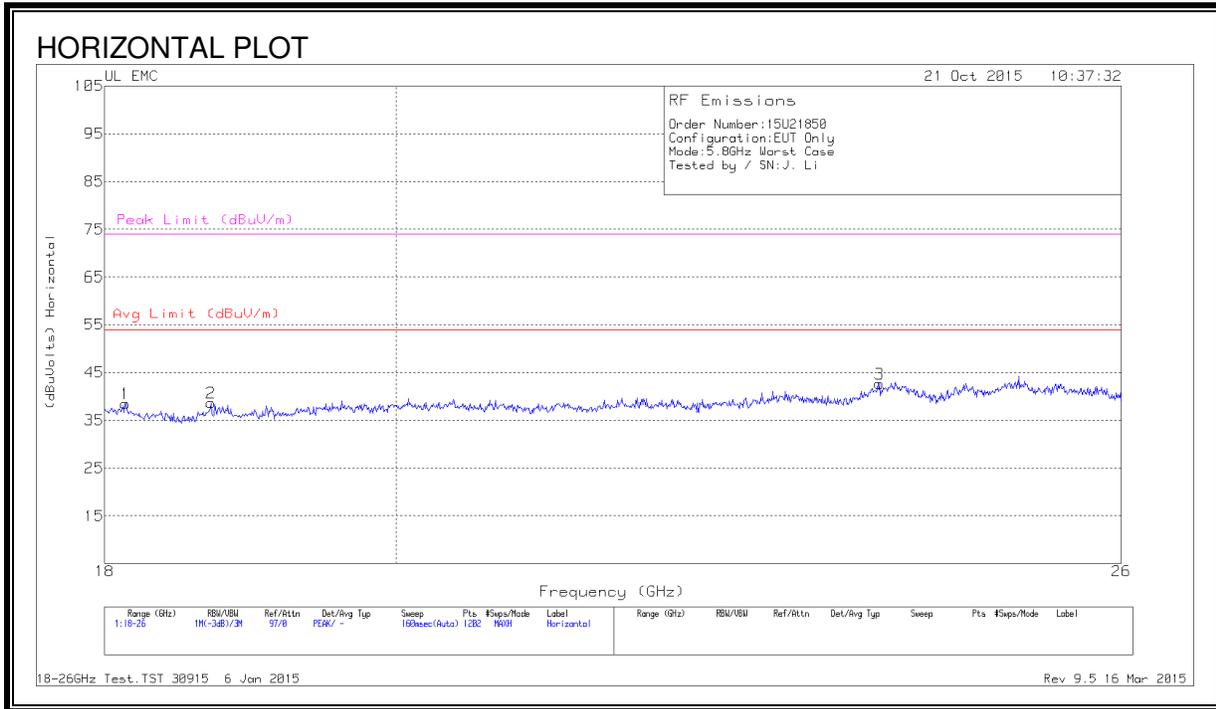


**HORIZONTAL AND VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T89 AF (dB/m)	Amp/Cb l (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.137	41.3	Pk	32.4	-25.7	-9.5	38.5	54	-15.5	74	-35.5
2	18.706	40.07	Pk	32.5	-24.4	-9.5	38.67	54	-15.33	74	-35.33
3	23.822	42.67	Pk	33.6	-24.1	-9.5	42.67	54	-11.33	74	-31.33
4	19.619	41.23	PK	32.5	-24.9	-9.5	39.33	54	-14.67	74	-34.67
5	20.511	42.5	Pk	32.7	-25.2	-9.5	40.5	54	-13.5	74	-33.5
6	22.863	43.27	PK	33.3	-24.9	-9.5	42.17	54	-11.83	74	-31.83

Pk - Peak detector  
18-26GHz Test.TST 30915 6 Jan 2015  
Rev 9.5 16 Mar 2015

**SPURIOUS EMISSIONS 26000 TO 40000 MHz (WORST-CASE CONFIGURATION)**

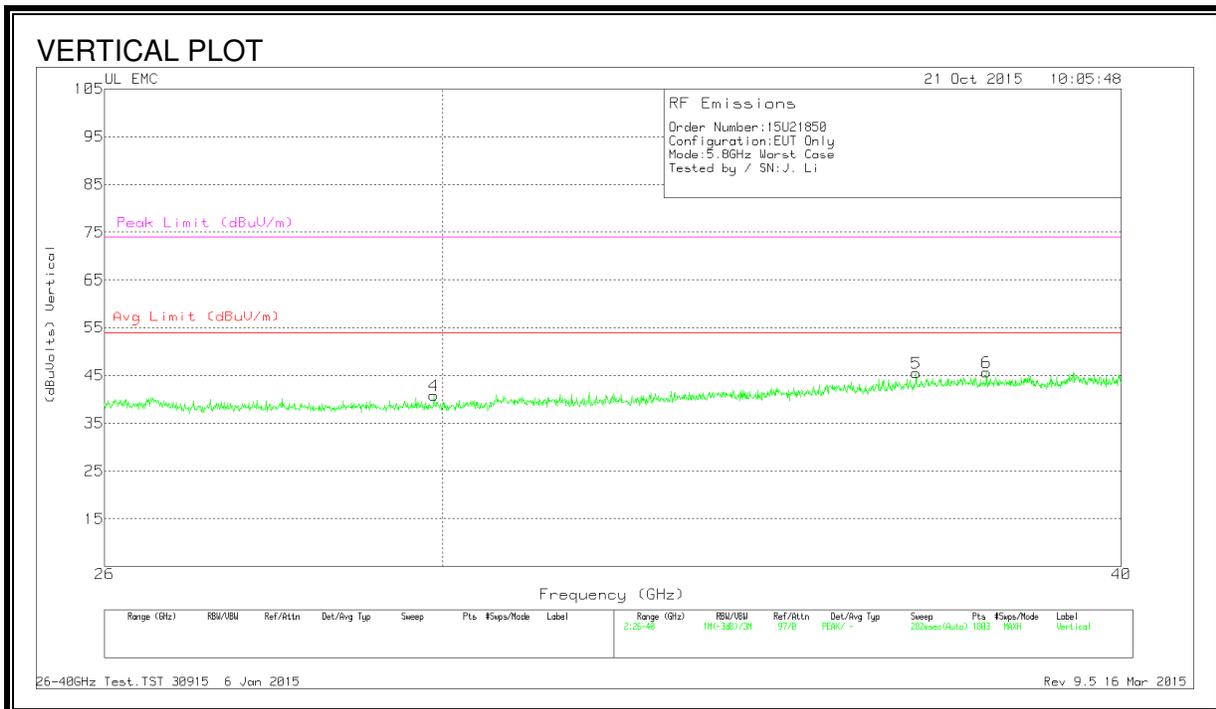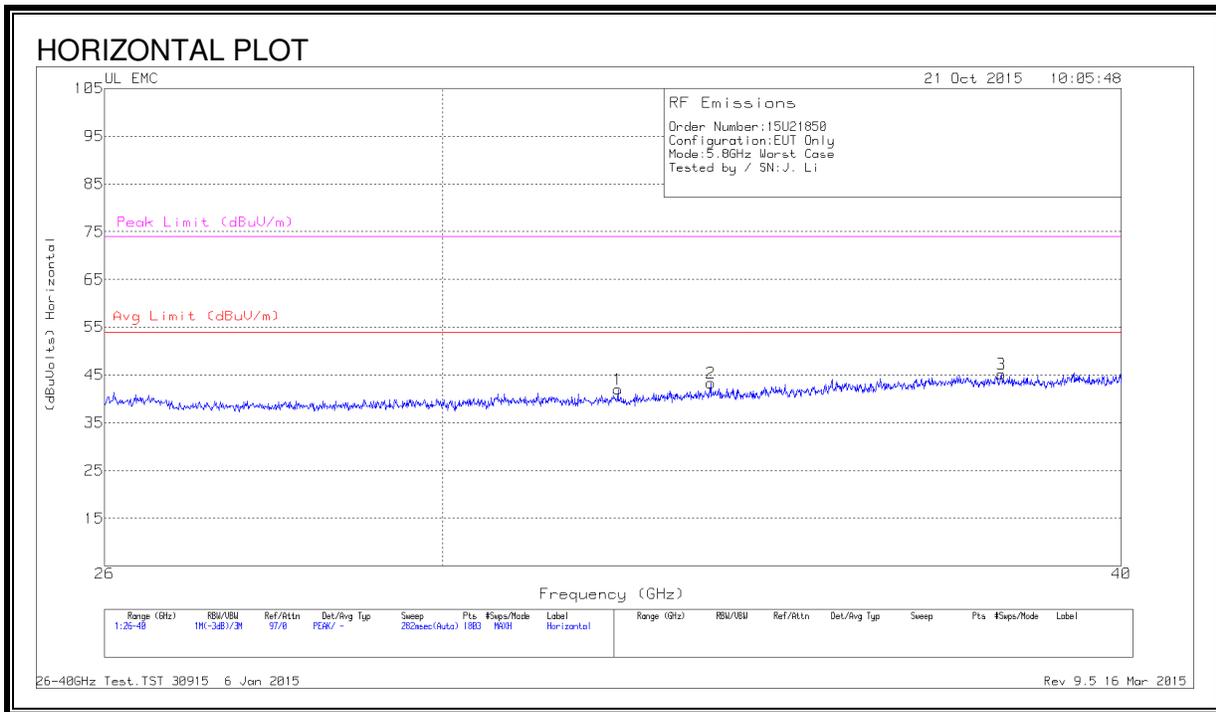

**HORIZONTAL AND VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T90 AF (dB/m)	Amp/Cb l (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	32.316	47.8	Pk	36.4	-32.7	-9.5	42	54	-12	74	-32
2	33.614	48.53	Pk	37	-32.7	-9.5	43.33	54	-10.67	74	-30.67
3	38.019	50.07	Pk	37.3	-32.7	-9.5	45.17	54	-8.83	74	-28.83
4	29.892	46.93	Pk	36	-32.6	-9.5	40.83	54	-13.17	74	-33.17
5	36.667	51.1	Pk	37.1	-33.2	-9.5	45.5	54	-8.5	74	-28.5
6	37.778	50.77	Pk	37	-32.6	-9.5	45.67	54	-8.33	74	-28.33

Pk - Peak detector  
 26-40GHz Test.TST 30915 6 Jan 2015  
 Rev 9.5 16 Mar 2015