



FCC / IC Test Report

FOR:

Apple Inc.

Model Name:

A1535

Product Description:

Bluetooth Device with BDR, EDR and LE support

FCC ID: BCGA1535

IC ID: 579C-A1535

Per:

47 CFR Part 15.247 (DSS)
RSS-247 Issue 1 (FHSs) & RSS-Gen Issue 4

REPORT #: EMC_APPLE-144-14002_A1535_15.247_BT

DATE: 2015-07-31



A2LA Accredited

IC recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecom.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	ASSESSMENT.....	3
2	ADMINISTRATIVE DATA	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER.....	4
3	EQUIPMENT UNDER TEST (EUT).....	5
3.1	EUT SPECIFICATIONS	5
3.2	EUT SAMPLE DETAILS	6
3.3	ACCESSORY EQUIPMENT (AE) DETAILS.....	6
3.4	TEST SAMPLE CONFIGURATION	6
3.5	JUSTIFICATION FOR WORST CASE MODE OF OPERATION.....	7
4	SUBJECT OF INVESTIGATION	8
5	MEASUREMENT RESULTS SUMMARY	8
6	MEASUREMENTS.....	9
6.1	MEASUREMENT UNCERTAINTY	9
6.2	ENVIRONMENTAL CONDITIONS DURING TESTING:.....	9
6.3	DATES OF TESTING:	9
7	MEASUREMENT PROCEDURES	10
7.1	RADIATED MEASUREMENT.....	10
7.2	POWER LINE CONDUCTED MEASUREMENT PROCEDURE	12
7.3	RF CONDUCTED MEASUREMENT PROCEDURE	12
8	TEST RESULT DATA	13
8.1	MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	13
8.2	BAND EDGE AND RESTRICTED BAND COMPLIANCE.....	17
8.3	20dB BANDWIDTH	24
8.4	CARRIER FREQUENCY SEPARATION	28
8.5	NUMBER OF HOPPING CHANNELS	30
8.6	TIME OF OCCUPANCY (DWELL TIME)	32
8.7	TRANSMITTER SPURIOUS EMISSIONS	34
8.8	AC POWER LINE CONDUCTED EMISSIONS	47
9	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING	50
10	REVISION HISTORY	51

1 Assessment

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant IC standard RSS-247 Issue 1.

No deviations were ascertained.

Company	Description	Model #
APPLE INC	Bluetooth Device with BDR, EDR and LE support	A1535

Responsible for Testing Laboratory:

2015-07-31	Compliance	Franz Engert (Compliance Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2015-07-31	Compliance	Kris Lazarov (EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3.
CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Street Address:	411 Dixon Landing Road
City/Zip Code	Milpitas, CA 95035
Country	USA
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Compliance Manager:	Franz Engert
Responsible Project Leader:	Kris Lazarov

2.2 Identification of the Client

Applicant's Name:	Apple Inc.
Street Address:	1 Infinite Loop
City/Zip Code	Cupertino, CA 95014
Country	USA
Contact Person:	Jacqueline Zhai
Phone No.	(408) 620-0616
e-mail:	jacqueline_zhai@apple.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as Applicant
Manufacturers Address:	-----
City/Zip Code	-----
Country	-----

3 Equipment Under Test (EUT)

3.1 EUT Specifications

Model No:	A1535
HW Version :	1.0
SW Version :	(a) STFW version 0x0804 (b) BT FW version 0x0056
FCC-ID :	BCGA1535
IC-ID:	579C-A1535
HVIN:	A1535
PMN:	A1535
Product Description:	Bluetooth Device with BDR, EDR and LE support
Frequency Range / number of channels:	Nominal band: 2400 – 2483.5; Center to center: 2402(ch 0) – 2480(ch 78), 79 channels
Type(s) of Modulation:	Bluetooth Basic/EDR: GFSK, $\pi/4$ DQPSK, 8DPSK
Modes of Operation:	Bluetooth BDR, EDR
Antenna Information as declared:	slot antenna max gain (2.484GHz) = 4.34dBi
Max. Output Powers:	Conducted average Power 7.0dBm
Power Supply/ Rated Operating Voltage Range:	lithium battery pack (dedicated) Vmin: 3.0V dc/ Vnom: 3.8V dc / Vmax: 4.3V dc
Operating Temperature Range	0 °C to 35 °C
Other Radios included in the device:	Bluetooth 4.2 Low Energy (BT LE)
Sample Revision	☐ Prototype ☐ Production ☒ Pre-Production

3.2 EUT Sample details

EUT #	Serial Number	HW Version	SW Version	Notes/Comments
1	CC2PT01UGQN7	1.0	(a) STFW version 0x0804 (b) BT FW version 0x0056	Radiated emissions and conducted measurements

3.3 Accessory Equipment (AE) details

AE #	Type	Model	Manufacturer	Serial Number
1	Laptop	Apple		
2	USB Power Adapter	Phihong	PSAI05R-050Q	P142302633A1

3.4 Test Sample Configuration

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT#1	The radio of the EUT was stimulated directly in a test mode not accessible by the end user. The measurement equipment was connected to the 50Ohm UFL port of the EUT.
2	EUT#1	The radio of the EUT was stimulated directly in a test mode not accessible by the end user. The internal antenna was connected.
3	EUT#1 + AE#1	The radio of the EUT was stimulated directly in a test mode not accessible by the end user. The internal antenna was connected. The EUT was connected to the AC mains through a Laptop.
4	EUT#1 + AE#2	The radio of the EUT was stimulated directly in a test mode not accessible by the end user. The internal antenna was connected. The EUT was connected to the AC mains through a USB charger.

3.5 Justification for Worst Case Mode of Operation

During the testing process the EUT was tested with transmitter set to low, mid and high channels. For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

The GFSK modulation scheme produced the highest output power (worst case) and was used in all test cases during this evaluation that define limits of power or field strength.

Modulation	Timing	Peak Power (dBm)
GFSK	CONT	6.92
8DPSK	CONT	6.53
DQPSK	CONT	6.29

GFSK DH5 package type was used for all power and emission measurements with an amplitude limit as it represents the worst case.

The occupied Bandwidth measurements were also done with 8DPSK and DQPSK modulation.

4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT per the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 Issue 1 of Industry Canada.

This test report is to support a request for new equipment authorization under the FCC ID: BCGA1657; IC ID: 579CA1535

Testing procedures are based on Public Notice "DA 00-705: March 30, 2000" and ANSI C63.10:2013 for FHSS systems.

5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§15.247(b)(1) RSS-247 5.4(2)	Maximum Peak Conducted Output Power	Nominal	GFSK DH5	■	□	□	□	Complies
§15.247(d) RSS-247 5.5 RSS-Gen 8.10	Band Edge Compliance	Nominal	GFSK DH5	■	□	□	□	Complies
§15.247(a)(1) RSS-247 5.1(1)	Spectrum Bandwidth	Nominal	GFSK DH5 DQPSK DH5 8DPSK DH5	■	□	□	□	Complies
§15.247(a)(1) RSS-247 5.1(1)	Carrier Frequency Separation	Nominal	GFSK DH5	■	□	□	□	Complies
§15.247(a)(1) RSS-247 5.1(4)	Number of Hopping Channels	Nominal	GFSK DH5	■	□	□	□	Complies
§15.247(a)(1)(iii) RSS-247 5.1(4)	Time of occupancy	Nominal	GFSK DH5 max duty cycle	■	□	□	□	Complies
§15.247(d) §15.209 (a) RSS-Gen 6.13	TX Spurious emissions-Radiated	Nominal	GFSK DH5	■	□	□	□	Complies
§15.207(a) RSS-Gen 8.8	AC Conducted Emissions <30MHz	Nominal	GFSK DH5	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

6 Measurements

6.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=1.

Radiated measurement

9 kHz to 30MHz	±2.5 dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	±2.0 dB (Biconilog Antenna)
1 GHz to 40 GHz	±2.3 dB (Horn Antenna)

Conducted measurement

150 kHz to 30 MHz	±0.7 dB (LISN)
-------------------	----------------

RF conducted measurement	±0.5 dB
--------------------------	---------

6.2 Environmental Conditions During Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25°C
- Relative humidity: 40-60%

6.3 Dates of Testing:

7/17/2015 - 7/21/2015

7 Measurement Procedures


7.1 Radiated Measurement

The radiated measurement is performed according to:


ANSI C63.10 (2013)

- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.


Radiated Emissions Test Setup Below 30MHz Measurements

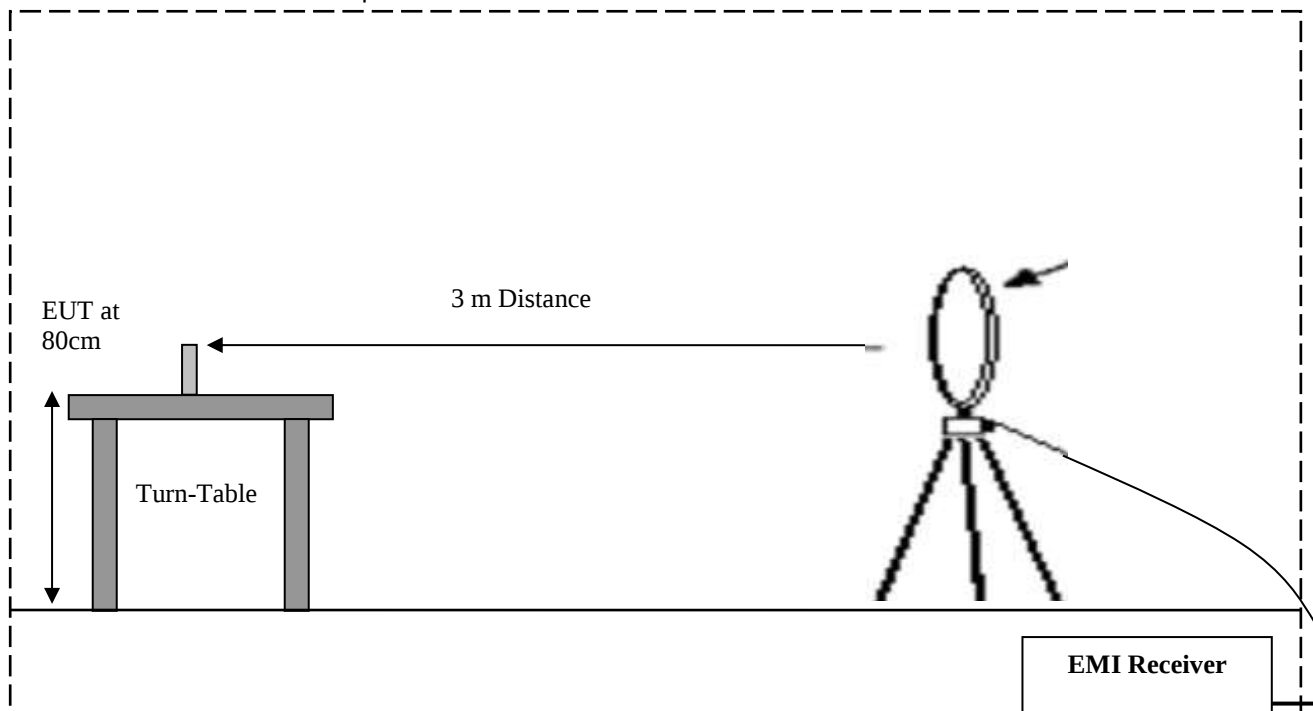

Radiated Emissions Test Setup 30MHz-1GHz Measurements

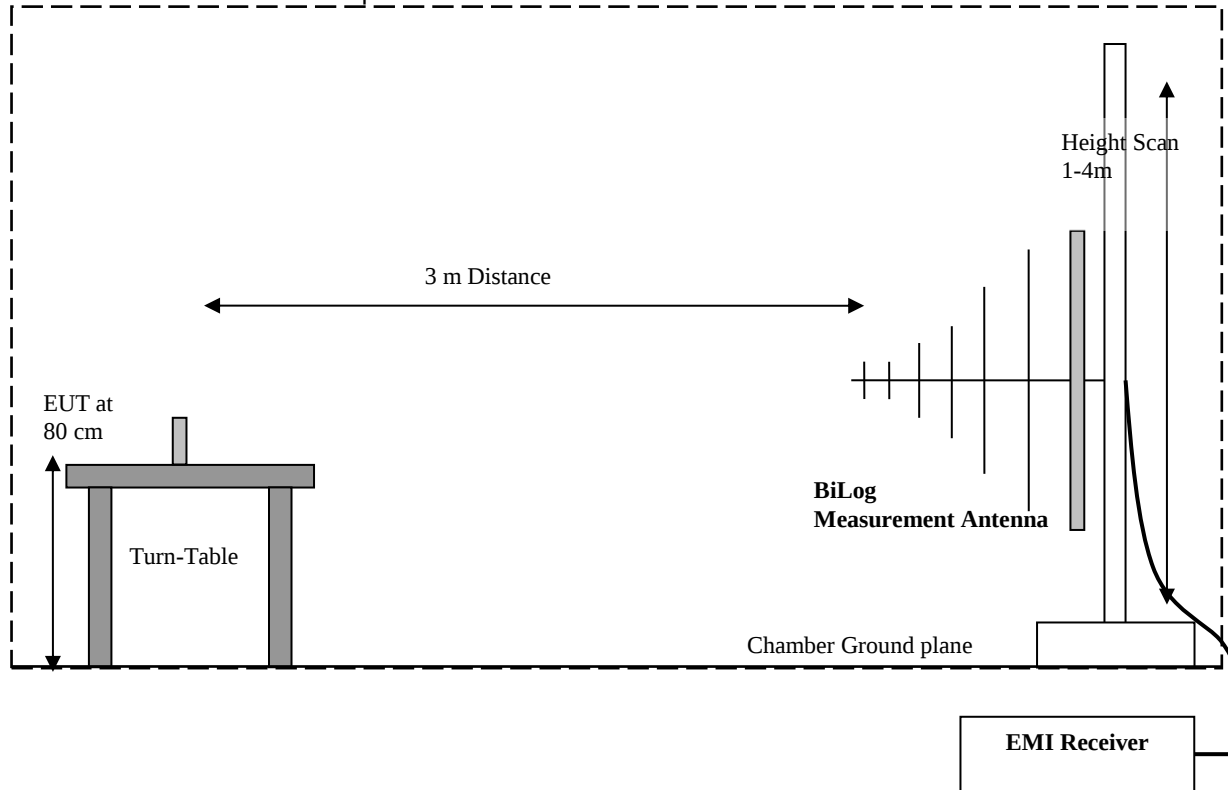

Radiated Emissions Test Setup Above 1GHz Measurements

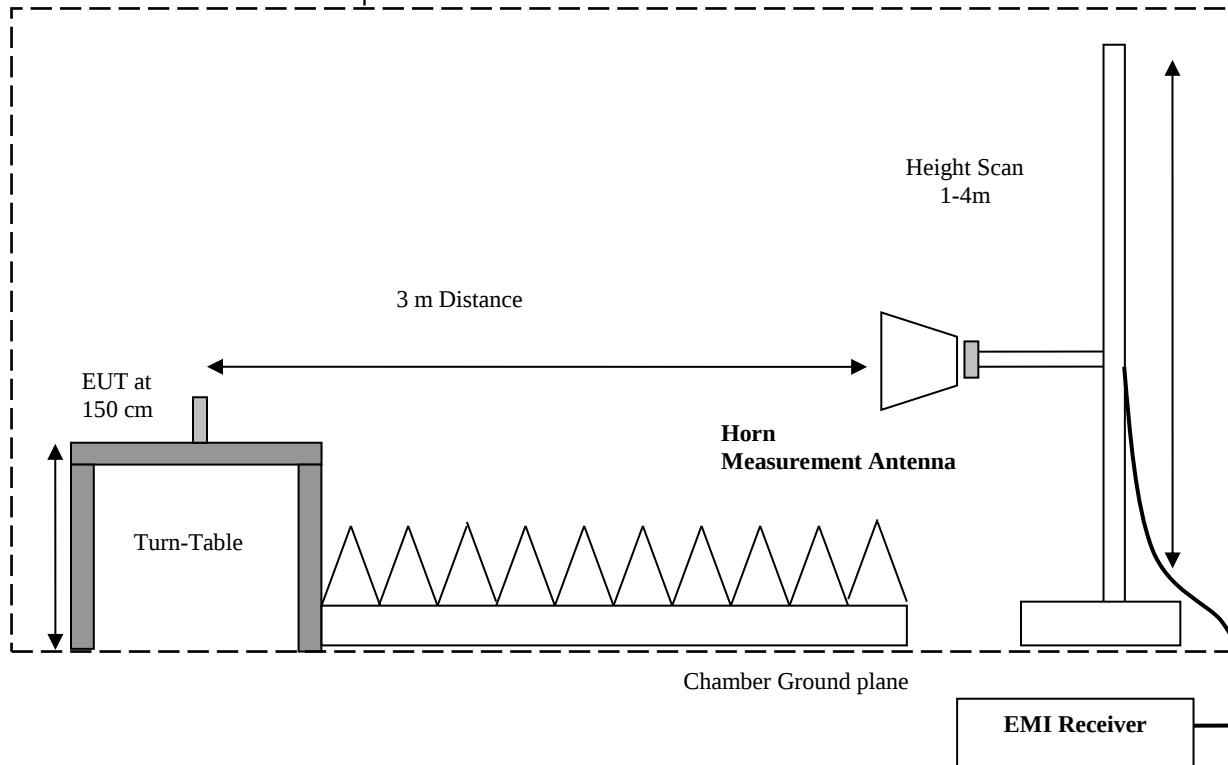

7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0


7.2 Power Line Conducted Measurement Procedure

AC Power Line conducted emissions measurements performed according to:

ANSI C63.10 (2013)

7.3 RF Conducted Measurement Procedure

Reference: FCC Public Notice DA 00-705:2000 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).



1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the SA (Rohde-Schwarz Spectrum Analyzer) to connect the EUT at the required mode of test.
3. Measurements are to be performed with the EUT set to the low, middle and high channels and for worst case modulation schemes.

8 Test Result Data

8.1 Maximum Peak Conducted Output Power

8.1.1 Measurement according to DA 00-705:2000

Spectrum Analyzer settings:

Span = approximately 5 times the 20 dB bandwidth

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Use the marker-peak function to set the marker to the peak of the emission.

8.1.2 Limits:

Maximum Peak Output Power:

FCC §15.247 (b)(1): 1W


RSS-247 5.4(2): 1W


8.1.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain (dBi)
21.6° C	1	GFSK	3.3V DC	4.34

8.1.4 Measurement result:

Plot #	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
1	2402	6.71	30	Pass
2	2441	6.92	30	Pass
3	2480	6.84	30	Pass

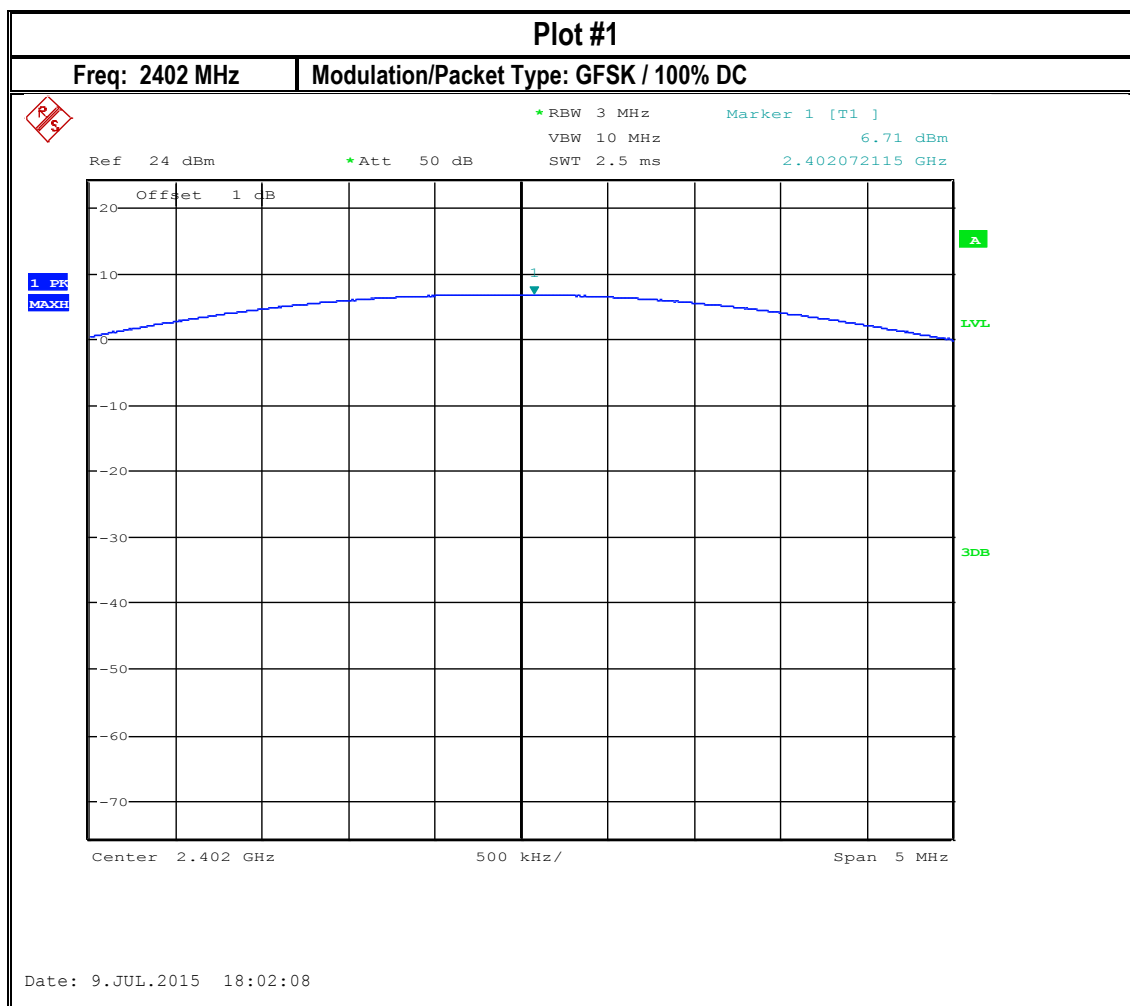

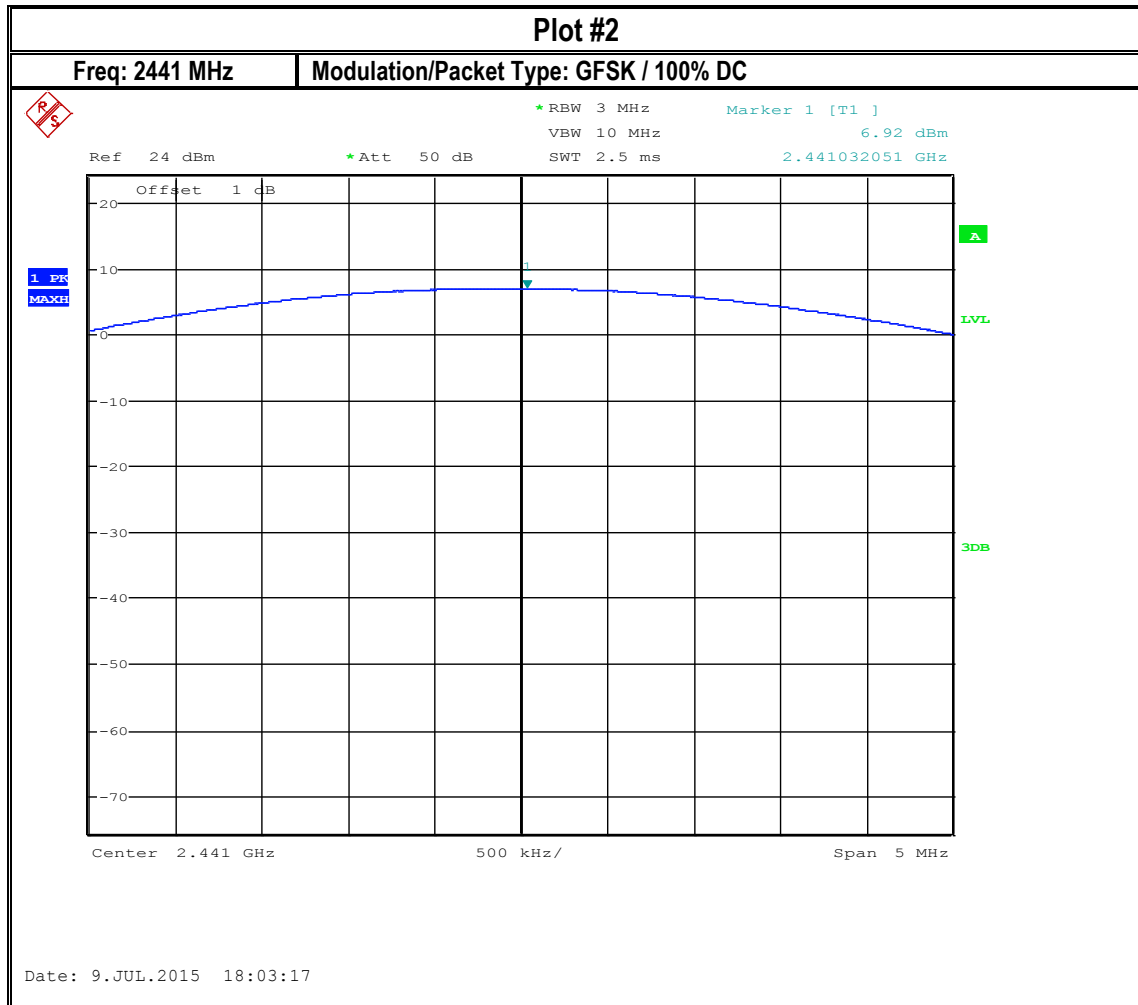

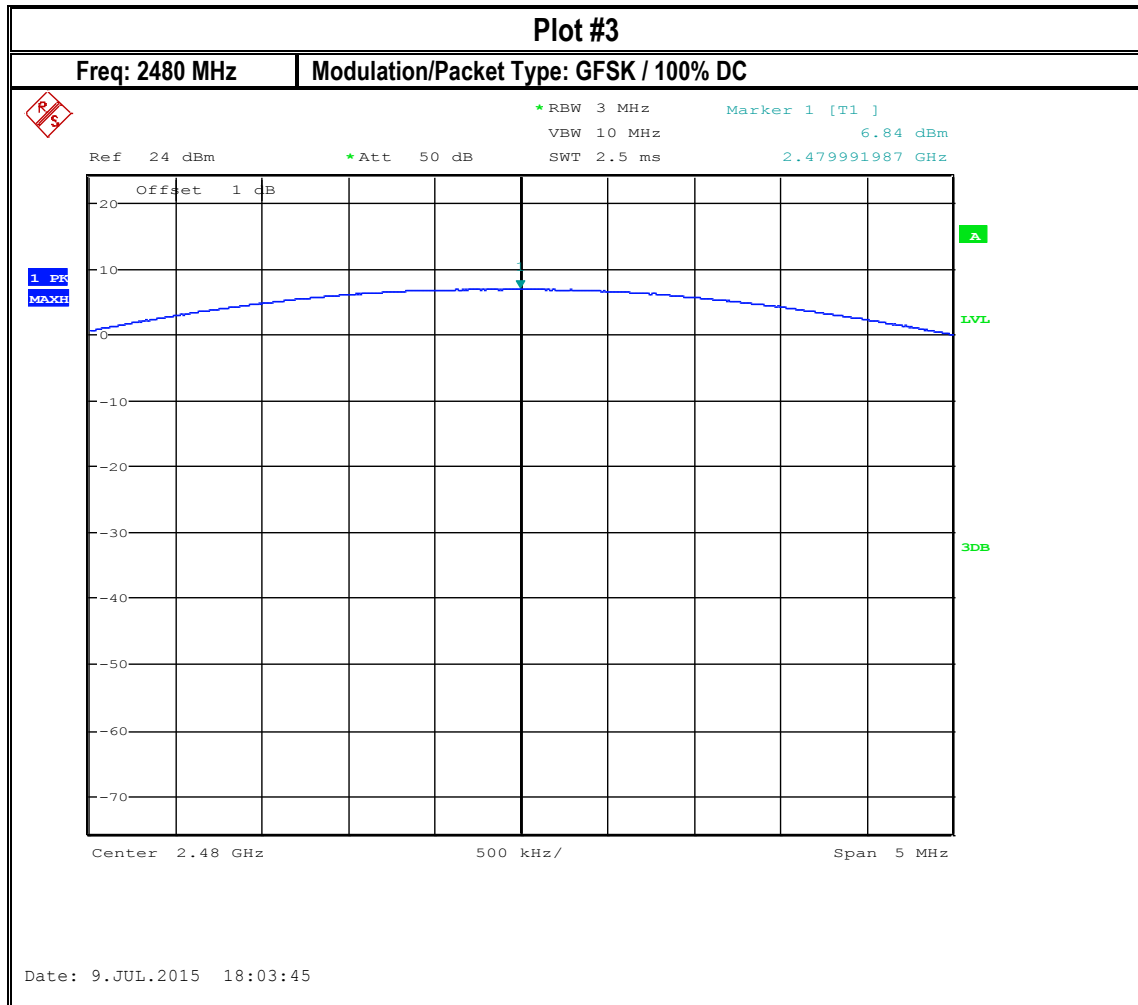

8.2 Band Edge and Restricted Band Compliance

8.2.1 Measurement according to DA 00-705:2000

Spectrum Analyzer settings for non-restricted band edge:

Span: wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep Time: Auto

Detector = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge.

Spectrum Analyzer settings for restricted band:

Peak measurements are made using a peak detector and RBW=1 MHz, VBW $\geq$ RBW

8.2.2 Limits restricted band §15.209 and RSS-Gen 8.10

*PEAK LIMIT= 74dB μ V/m @3m =-21.23dBm

*AVG. LIMIT= 54dB μ V/m @3m =-41.23dBm

Start frequency & stop frequency according to frequency range specified in the restricted band table in FCC section 15.205 & RSS-Gen 8.10

Measurements with a peak detector were used to show compliance to average limits, thus showing compliance to both peak and average limits.

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

8.2.3 Limits non restricted band §15.247(d) and RSS-247 5.5

FCC15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 5/5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.


8.2.4 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain (dBi)
21.6° C	1	Hopping; GFSK DH 5 fixed channel	3.3V DC	4.34


8.2.5 Measurement result:

Plot #	EUT operating mode	Band Edge	Band Edge Delta (dBc)	Limit (dBc)	Result
1	GFSK DH5 fixed channel	Lower, non-restricted	-56.19	20	Pass
2	GFSK DH5 Hopping	Lower, non-restricted	-51.86	20	Pass


Plot #	EUT operating mode	Band Edge	Measured value (dBm)	Corrected by duty cycle	Corrected by gain (dBm)	Average limit (dBm)	Result
3	GFSK DH5 fixed channel	Upper restricted peak	-47.48	NA due to max hold trace	-43.14	-41.23	Pass
4	GFSK DH5 Hopping	Upper restricted peak	-48.26	NA due to max hold trace	-43.92	-41.23	Pass

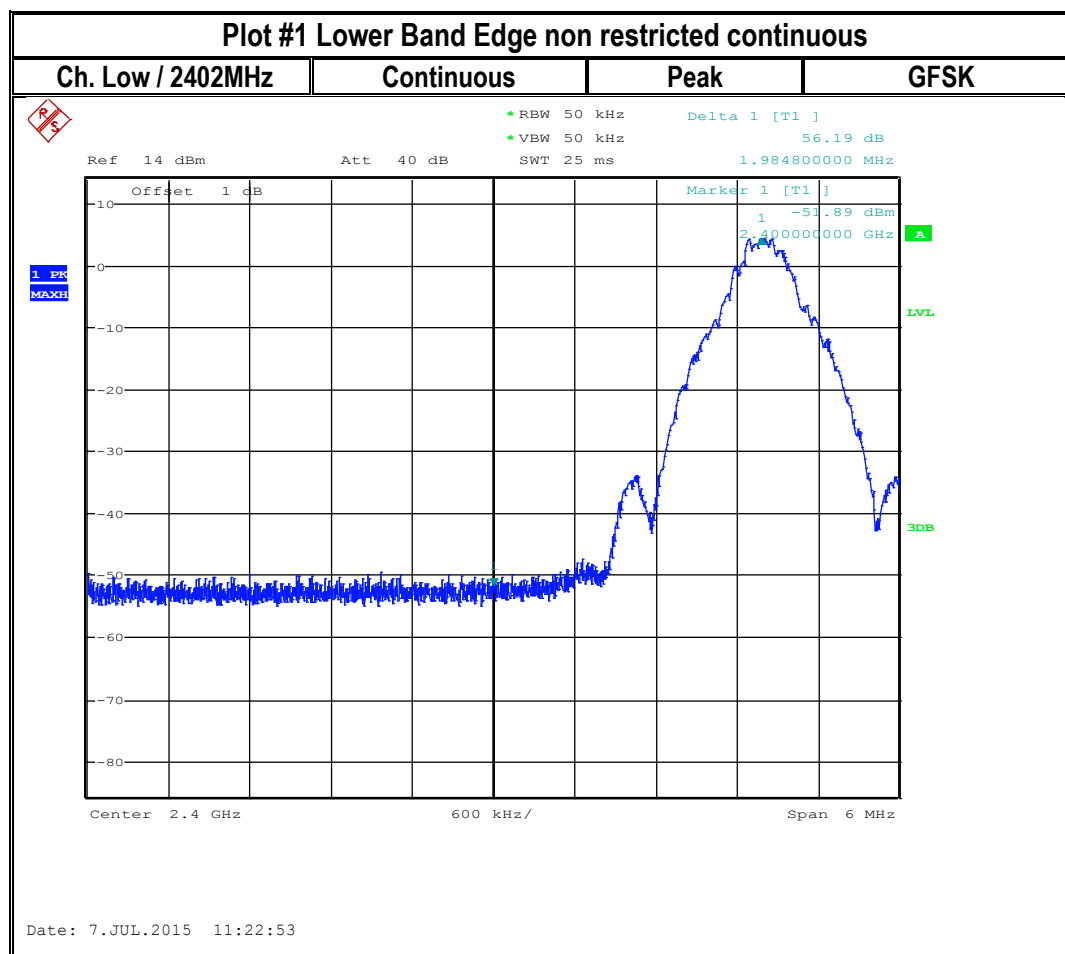

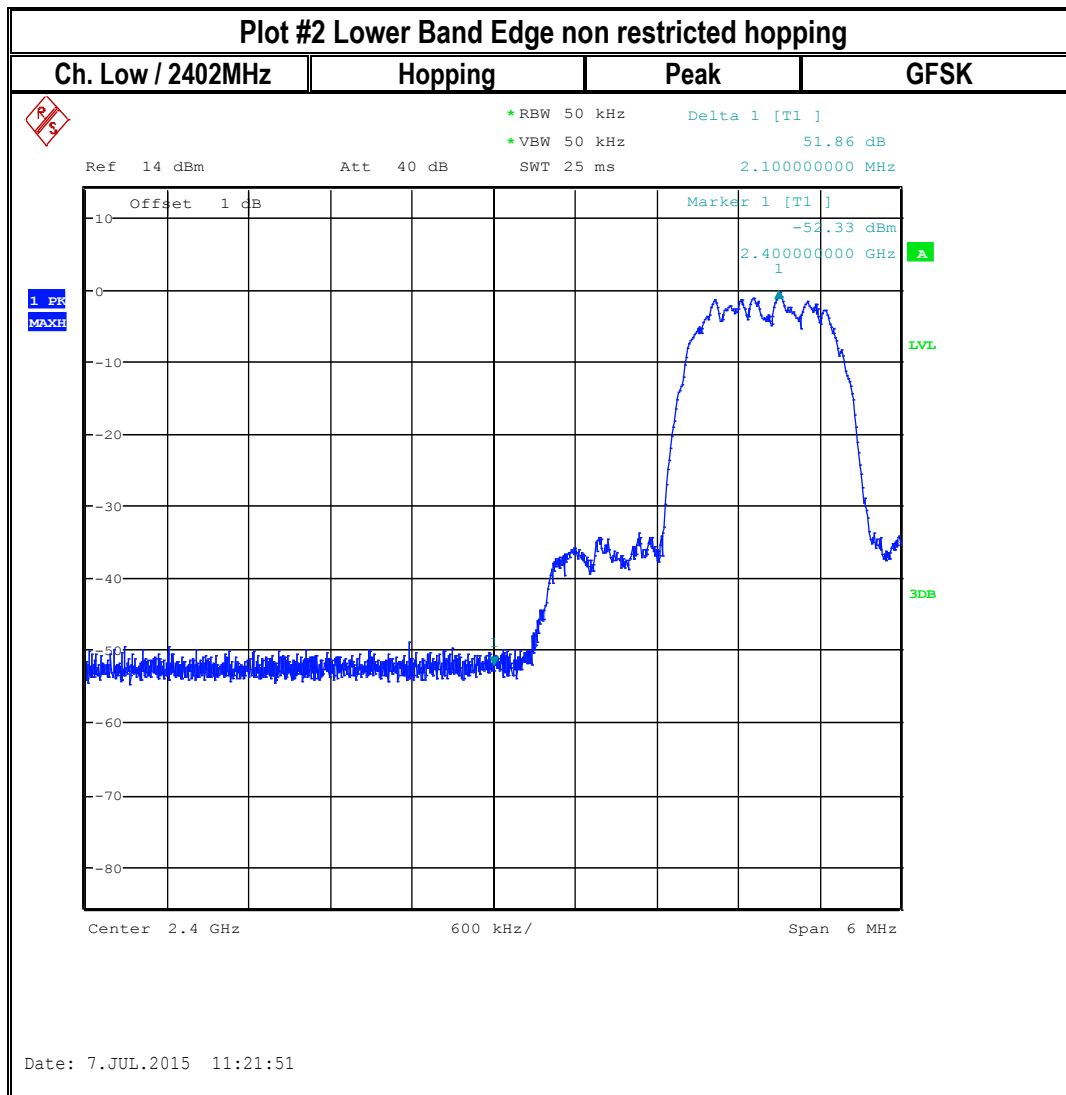

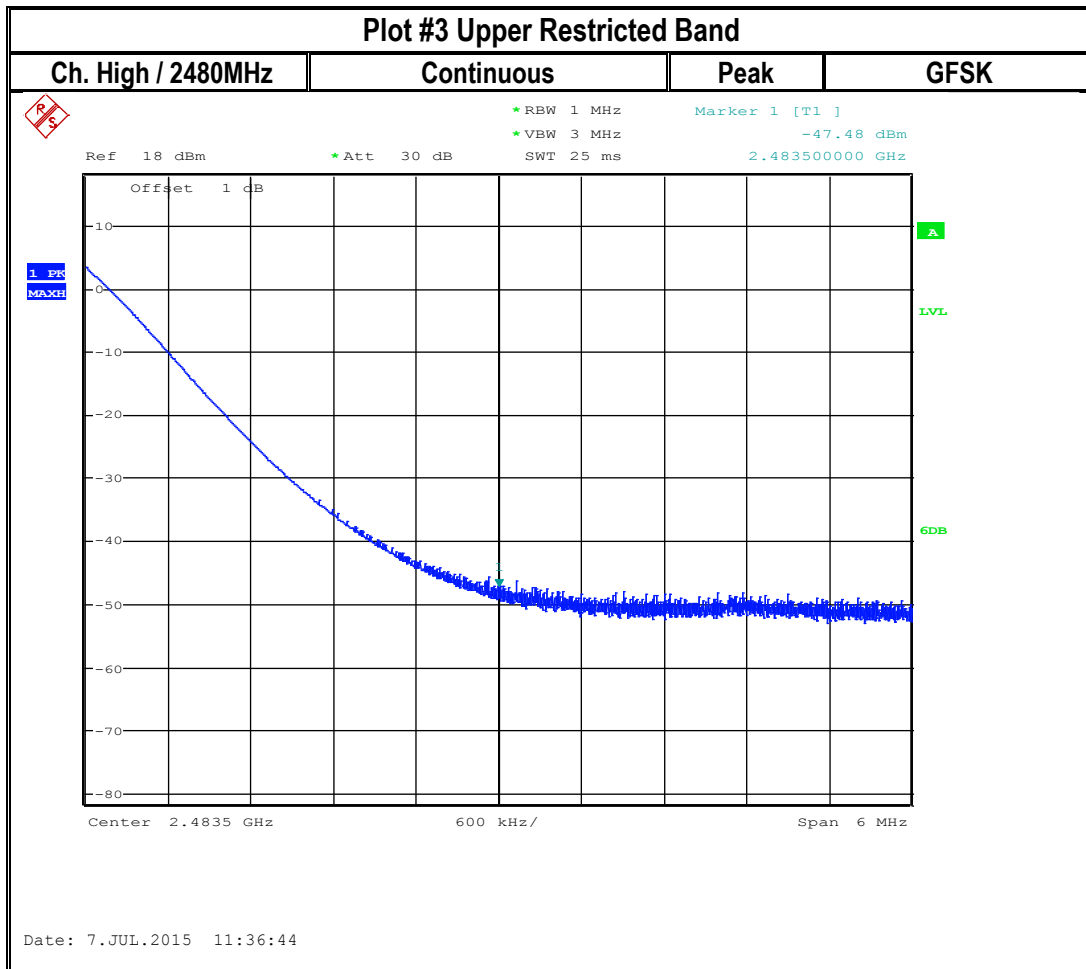

Note: The Peak detector measurement is passing the average limit with a margin greater than the antenna gain (4.34dBi) that is not included in the offset.

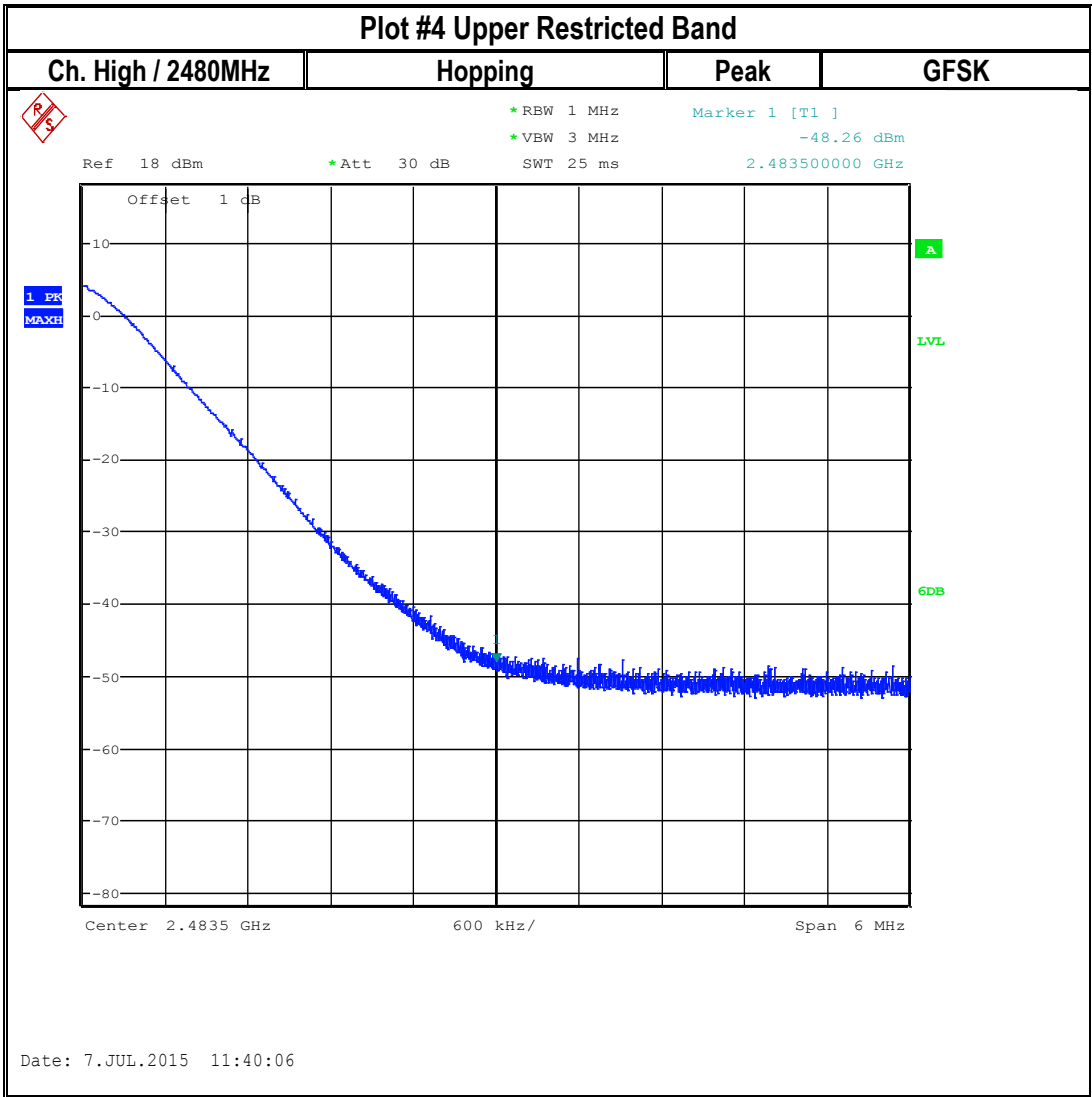

Note: The Peak detector measurement is passing the average limit with a margin greater than the antenna gain (4.34dBi) that is not included in the offset.

8.3 20dB Bandwidth

8.3.1 Measurement according to DA 00-705:2000

Spectrum Analyzer settings:

Span: approximately 2 to 3 times the 20 dB bandwidth, centered on the hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

Sweep Time: Auto

Detector = peak

Trace = max hold

8.3.2 Limits: §15.247 (a) (1), RSS-247 5.1(1)

Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.3.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
21.6° C	1	GFSK, DQPSK, 8PSK – DH5	3.3V DC


8.3.4 Measurement result:


Plot #	EUT operating mode	20 dB Bandwidth (MHz)
1	GFSK DH5 fixed channel	0.918
2	8PSK DH5 fixed channel	1.352
3	DQPSK DH5 fixed channel	1.331



8.3.5 Measurement Plots:

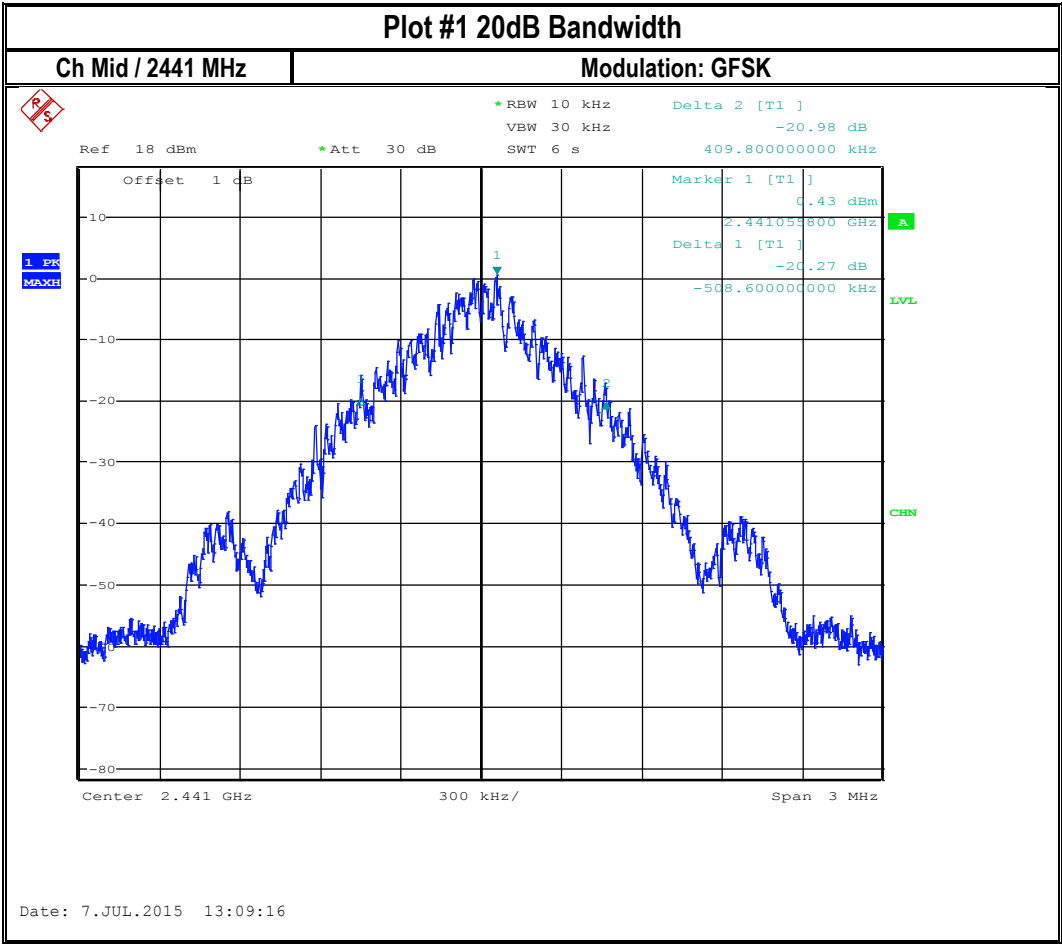

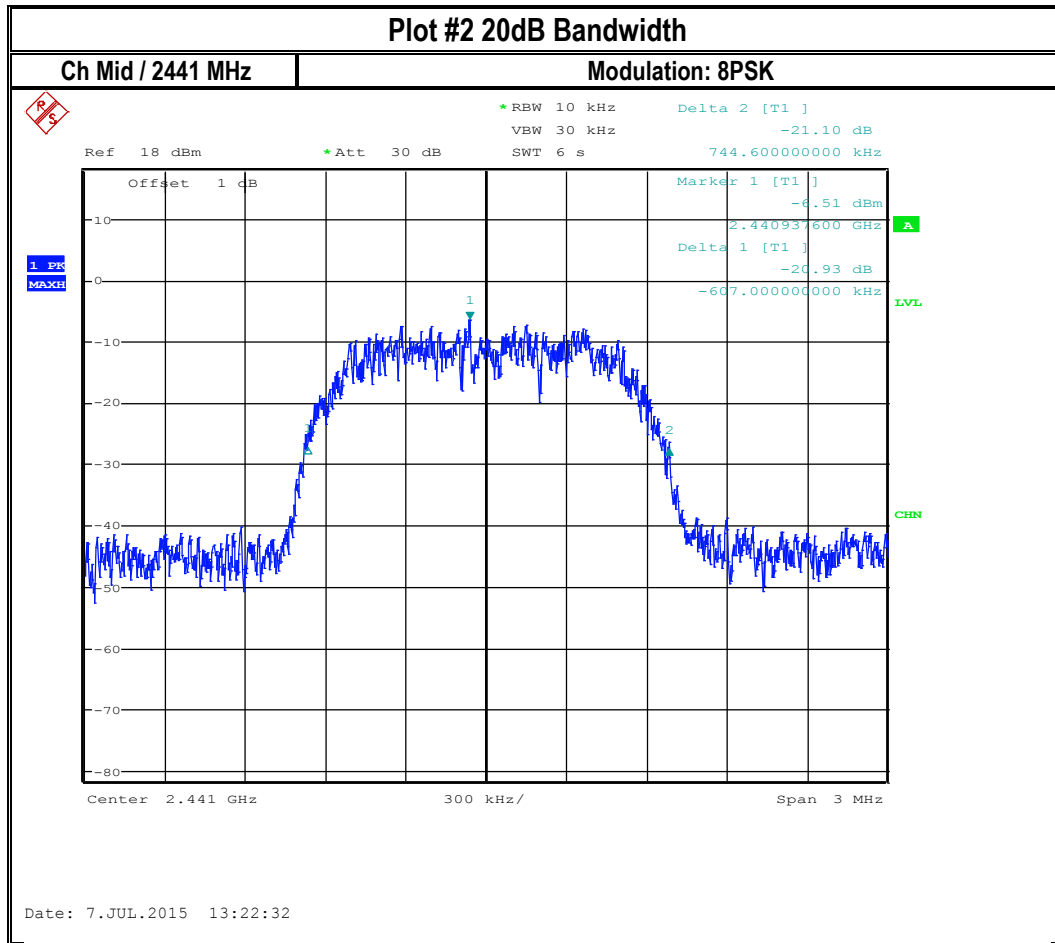

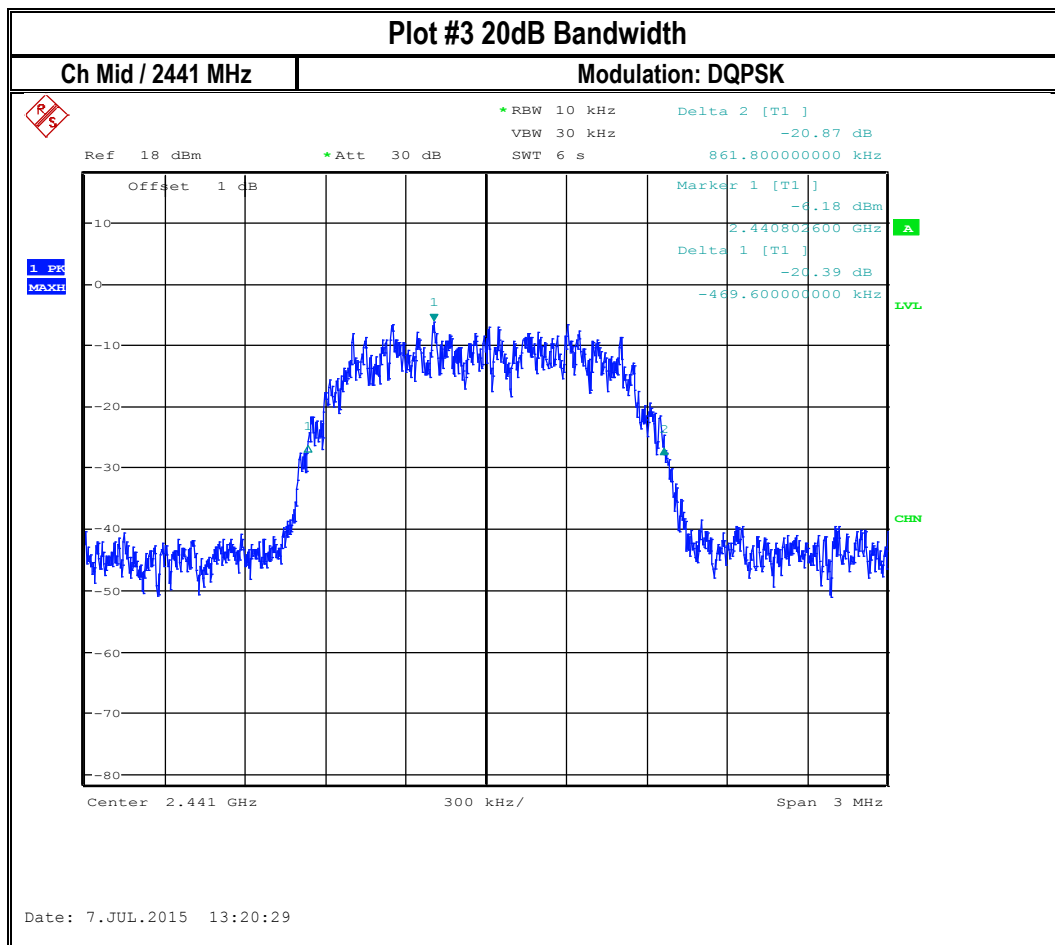

8.4 Carrier Frequency Separation

8.4.1 Measurement according to DA 00-705:2000

Spectrum Analyzer settings:

Span = Wide enough to capture the peaks of the two adjacent channels

RBW $\geq$ 1% of the span

VBW $\geq$ RBW or 3X

Sweep = auto

Detector function = peak

Trace = max hold

Use marker-delta function to determine the separation between the peaks of the two adjacent channels.

8.4.2 Limits: § 15.247 (a) (1) & RSS-247 5.1(1)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.4.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
21.6° C	1	GFSK DH5 hopping	3.3V DC

8.4.4 Measurement result:

Plot #	Carrier Frequency Separation (MHz)	Limit	Result
1	1.020	$> 2/3 * \text{OBW} = 0.65$	Pass

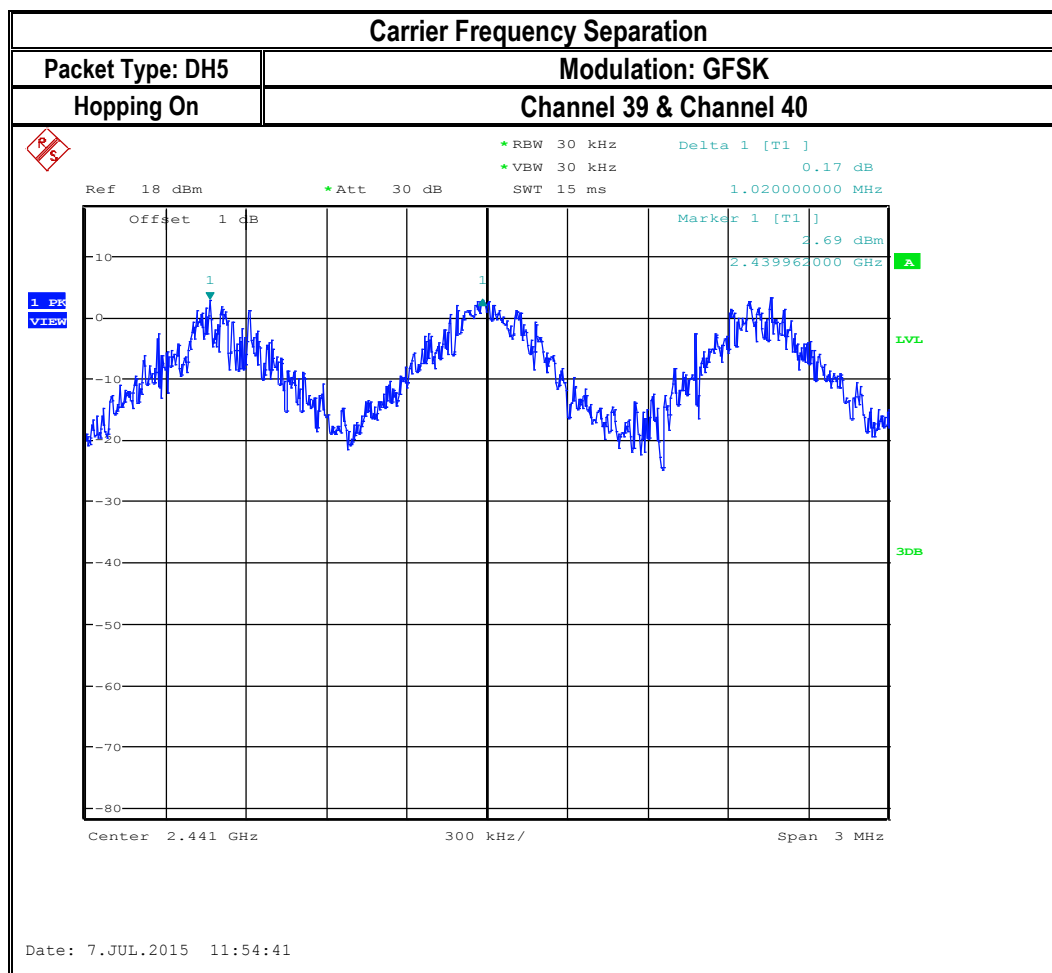

8.5 Number of hopping channels

8.5.1 Measurement according to DA 00-705:2000

Spectrum Analyzer settings:

Span = the entire frequency band of operation

RBW $\geq$ 50 KHz

VBW $\geq$ RBW or 3X

Sweep = auto

Detector function = peak

Trace = max hold

8.5.2 Limits:

§ 15.247 (a) (1) (ii) (iii) & RSS-247 5.1(4)


At least 15 non-overlapping channels

8.5.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
21.6° C	1	GFSK DH5 hopping	3.3V DC

8.5.4 Measurement result:

Plot #	Number of Hopping Frequencies	Limit	Result
1	79	15 non-overlapping channels	Pass

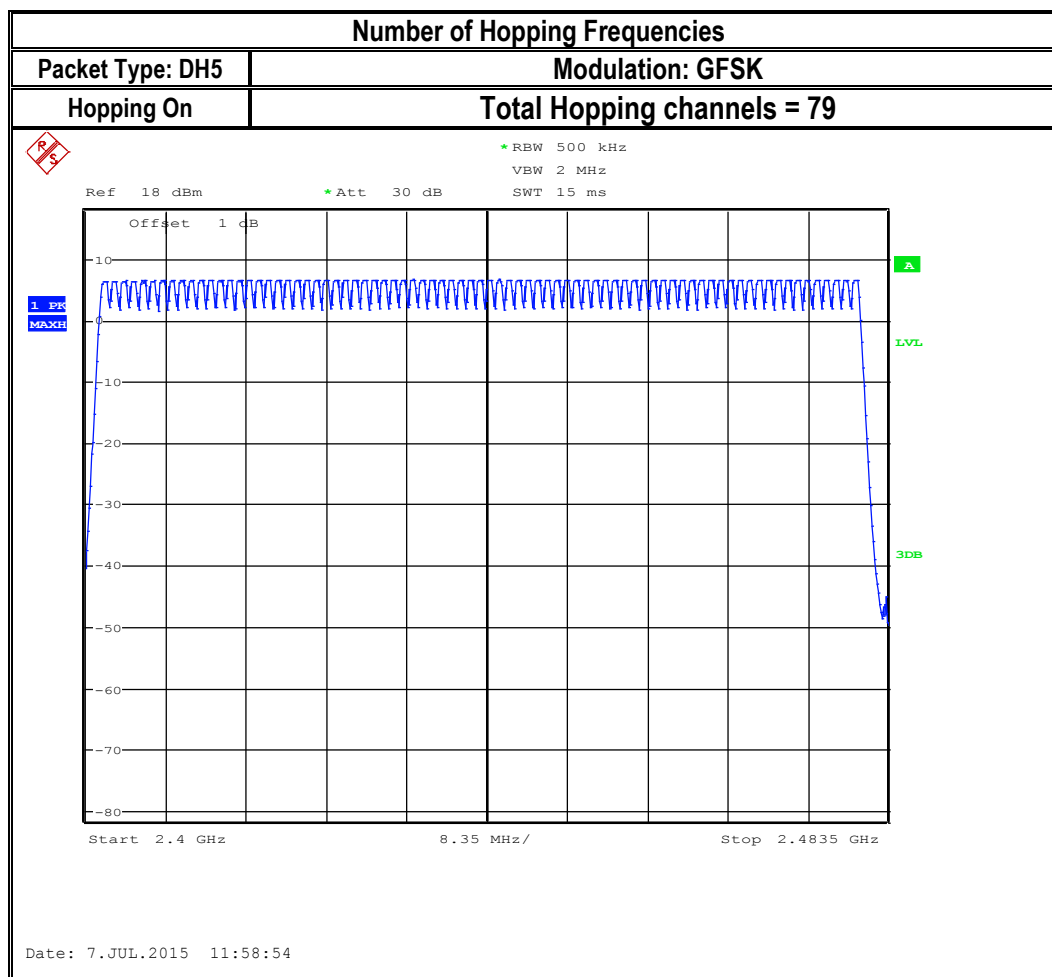

8.6 Time of Occupancy (Dwell Time)

8.6.1 Measurement according to DA 00-705:2000

Spectrum Analyzer settings:

Duration of Pulse Measurement

RBW= 1MHz
 VBW= 3MHz
 Sweep Time= 10 ms
 Sweep Mode= Single
 Detector=Peak
 Trigger= Video

Observation Period

RBW= 1MHz
 VBW= 3MHz
 Sweep Time= 31.6 s
 Sweep Mode= Single
 Detector=Peak
 Trigger= Free Run

Observation Period = 0.4s x No. of hopping channels = 0.4 x 79 = 31.6 s

8.6.2 Limits: § 15.247 (a) (1) (iii) & RSS-247 5.1(4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


8.6.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
21.6° C	1	Hopping with maximum package length and duty cycle	3.3V DC

8.6.4 Measurement result:

Plot #	Modulation	Timing	Total Occupancy Time in 20s	Total Occupancy Time in 31.6s	Limit	Result
1	GFSK	DH5 max duty cycle	0.22s	0.34s	< .4s in 31.6s	Pass

8.6.5 Measurement Plots:

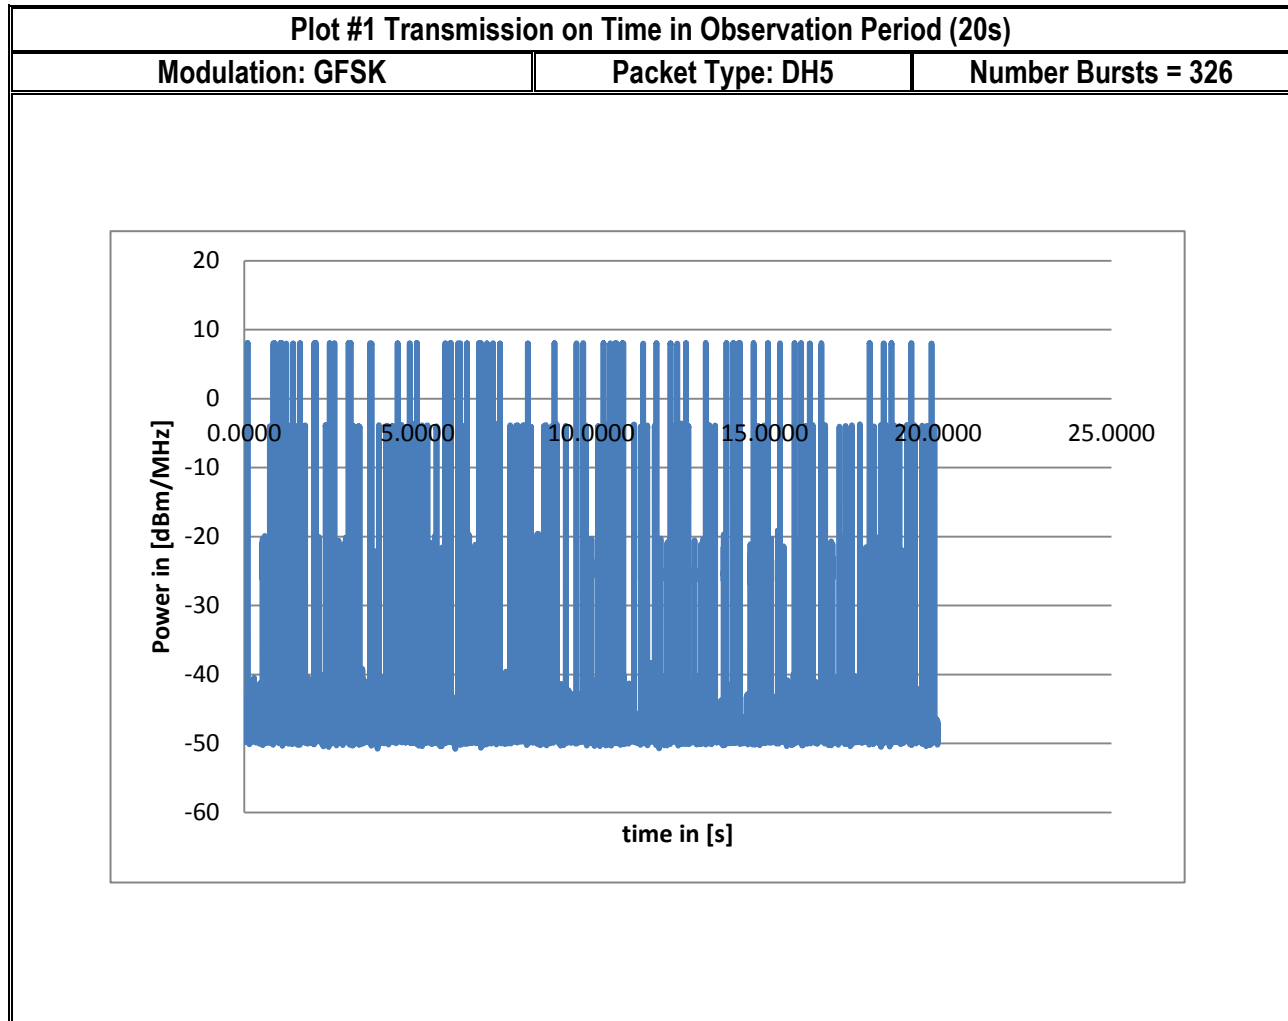

8.7 Transmitter Spurious Emissions

8.7.1 Measurement according to ANSI C63.10 (2013)

Analyzer Settings:

Frequency = 9 KHz – 30 MHz

RBW = 9 KHz

Detector: Peak

Frequency = 30 MHz – 1 GHz

Detector = Peak / Quasi-Peak

RBW=120 KHz (<1GHz)

Frequency > 1 GHz

Detector = Peak / Average

RBW= 1MHz

Plots reported here represent the worst case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT. Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

8.7.2 Limits: §15.247(d)/15.209(a) & RSS-Gen 6.13

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

*PEAK LIMIT= 74dB μ V/m

*AVG. LIMIT= 54dB μ V/m

Table 1:

Frequency of emission (MHz)	Field strength @ 3m (μ V/m)	Field strength @ 3m (dB μ V/m)
30–88	100	40dB μ V/m
88–216	150	43.5 dB μ V/m
216–960	200	46 dB μ V/m
Above 960	500	54 dB μ V/m

Table 2:

Frequency of emission (MHz)	Field strength (μ V/m) / (dB μ V/m)	Measurement Distance (m)
0.009–0.490	2400/F(kHz) / -----	300
0.490–1.705	24000/F(kHz) / -----	30
1.705–30.0	30 / (29.5)	30

Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements described in 5.4.

The highest (or worst-case) data rate shall be recorded for each measurement.

For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation factor as follow:

Conversion factor (CF) = $40 \log (D/d) = 40 \log (300\text{m} / 3\text{m}) = 80\text{dB}$


8.7.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
21.6° C	2	GFSK DH5 fixed channel	3.3V DC


8.7.4 Measurement result:


Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.7.2	Pass
4-8	Mid	9 kHz – 26 GHz	See section 8.7.2	Pass
9-12	High	30 MHz – 18 GHz	See section 8.7.2	Pass


8.7.5 Measurement Plots:

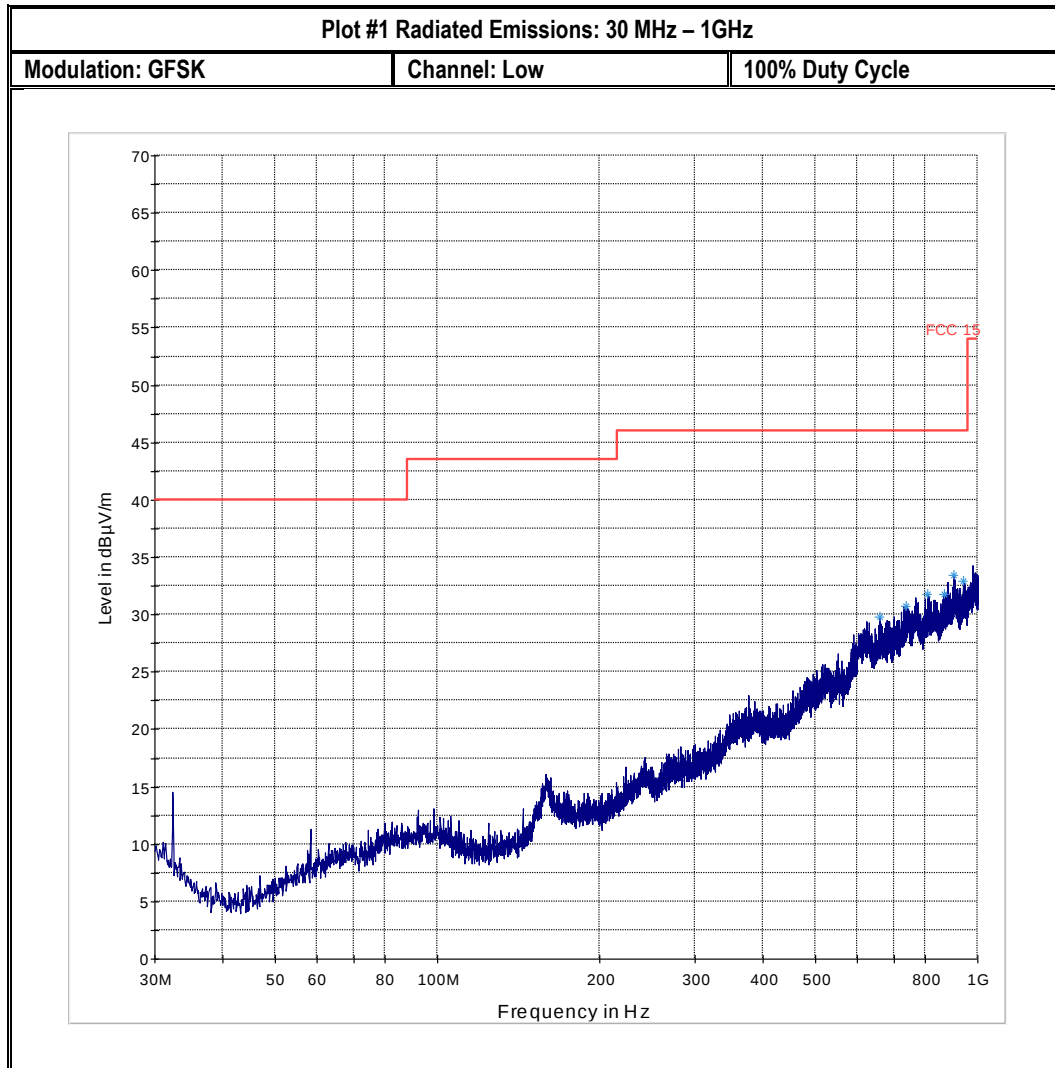


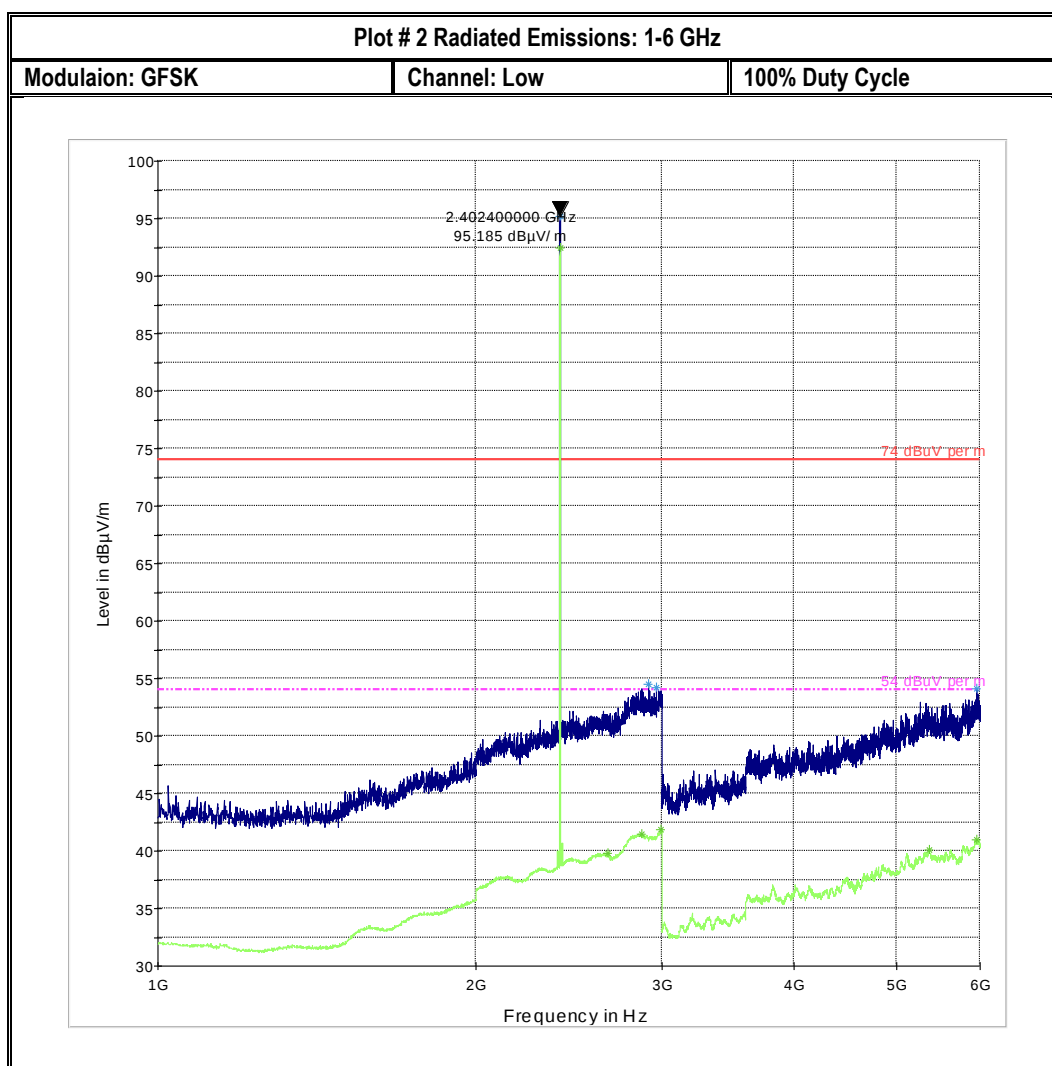

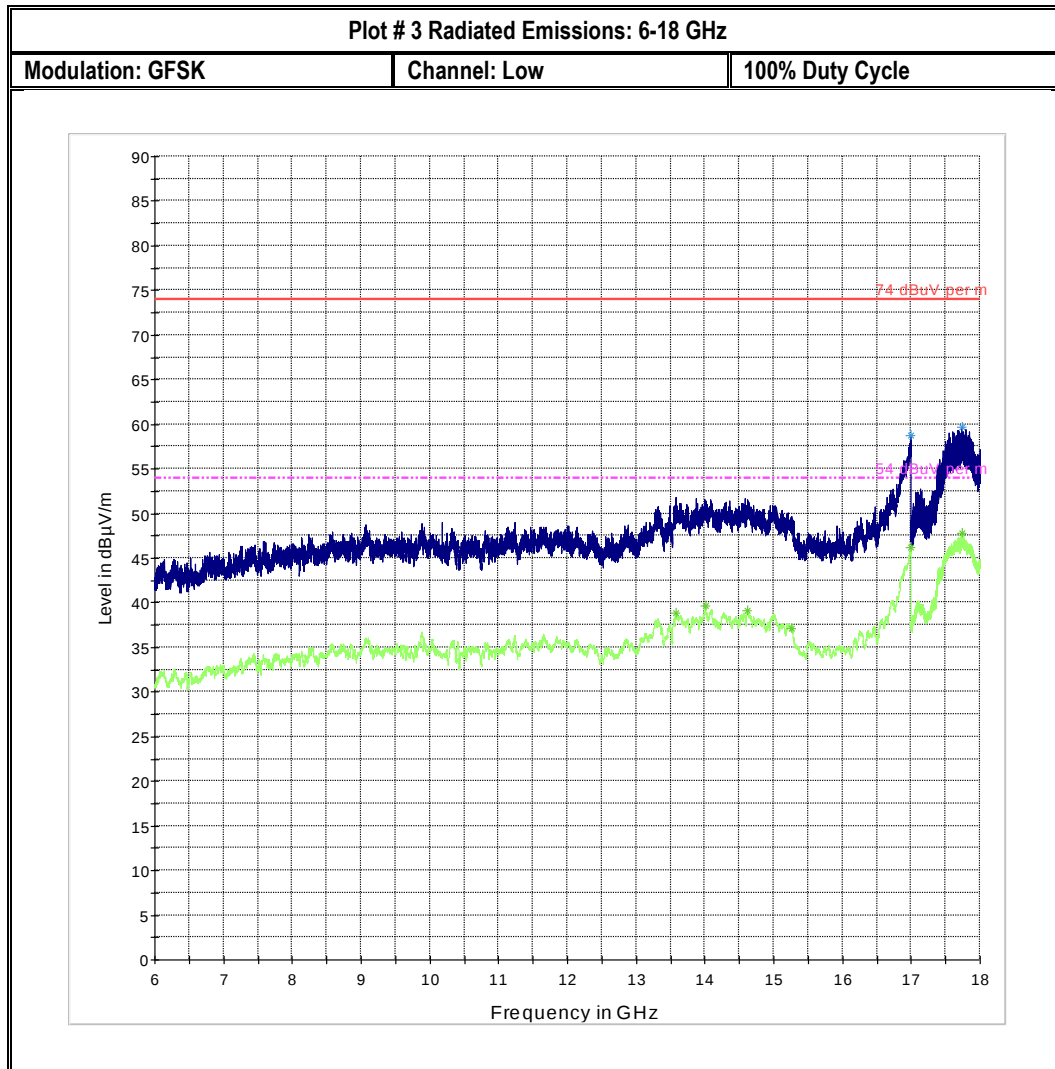

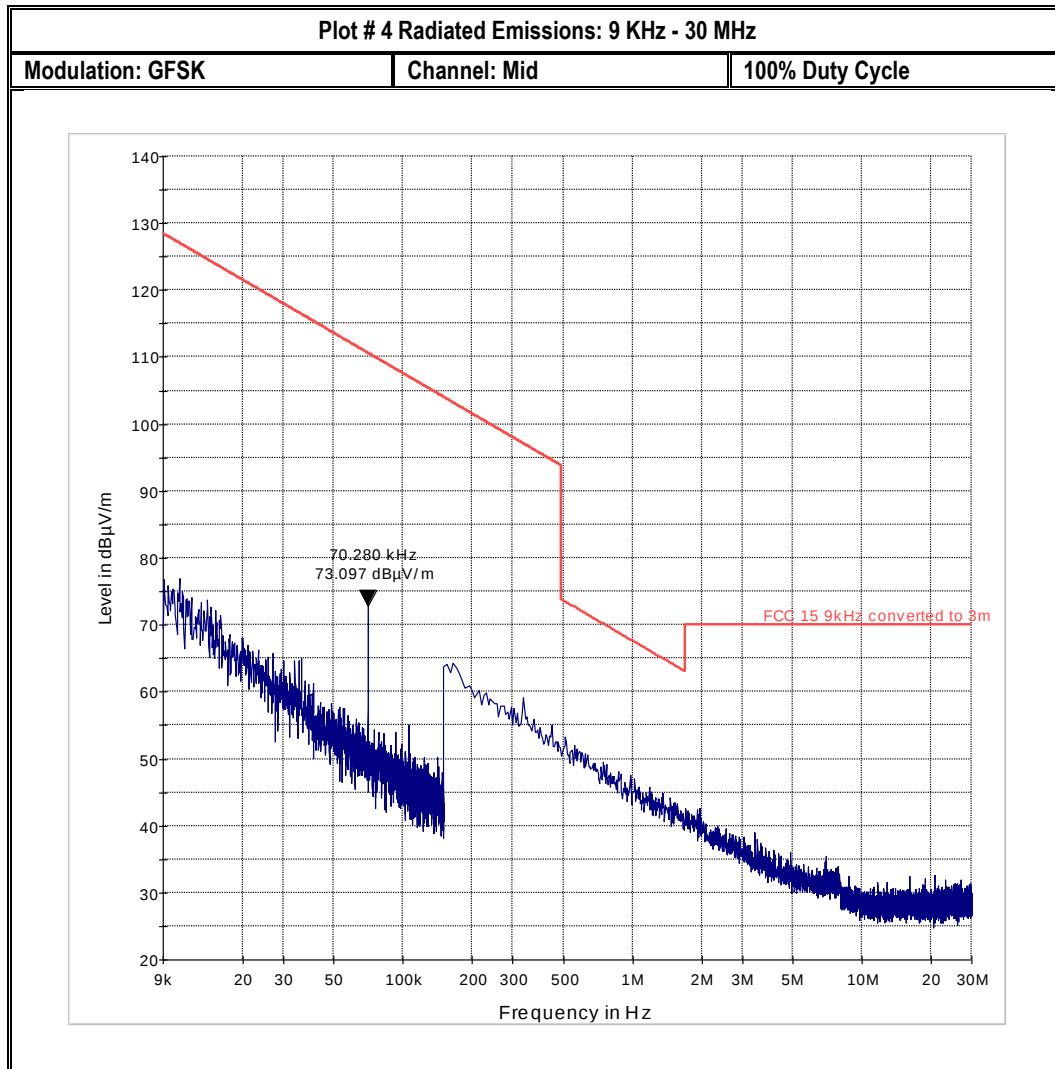

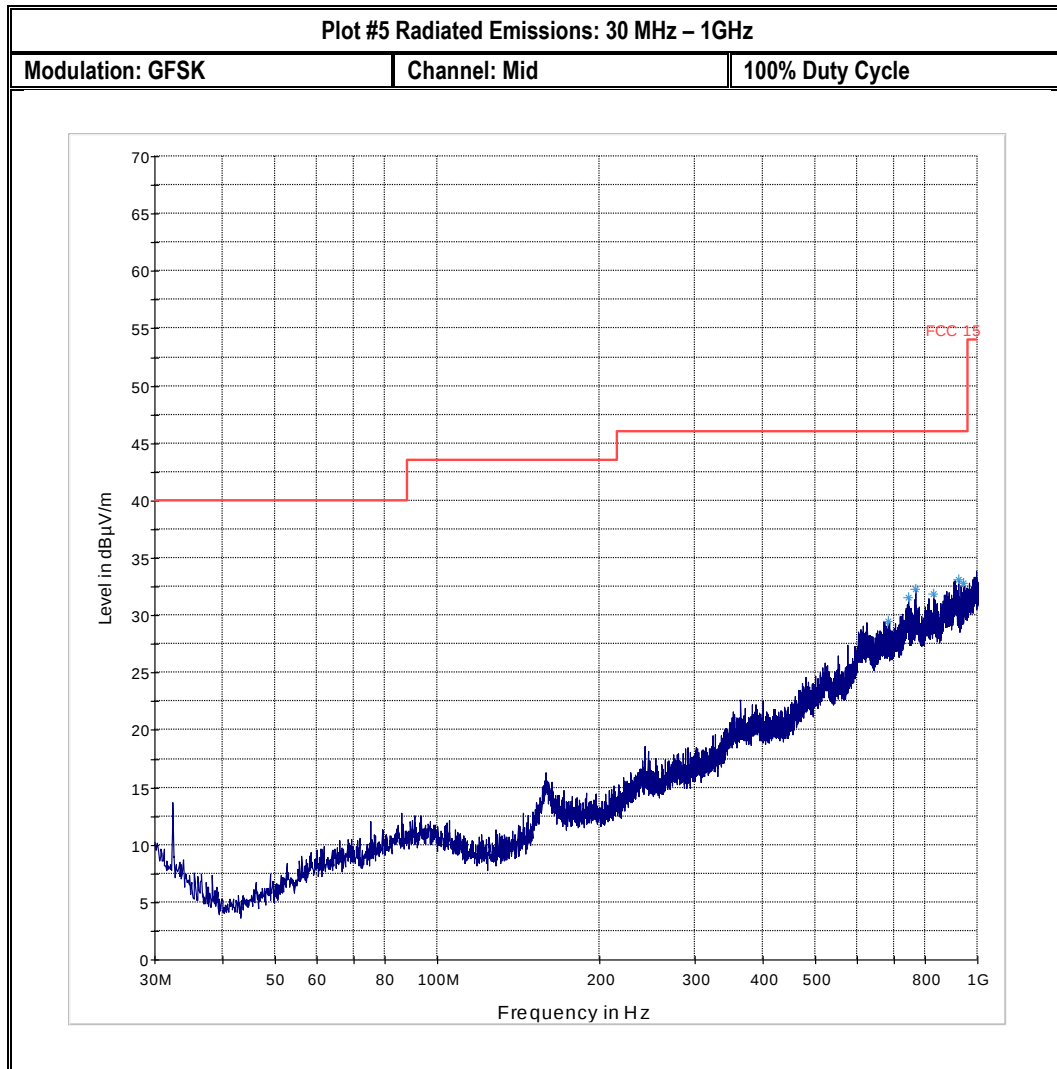

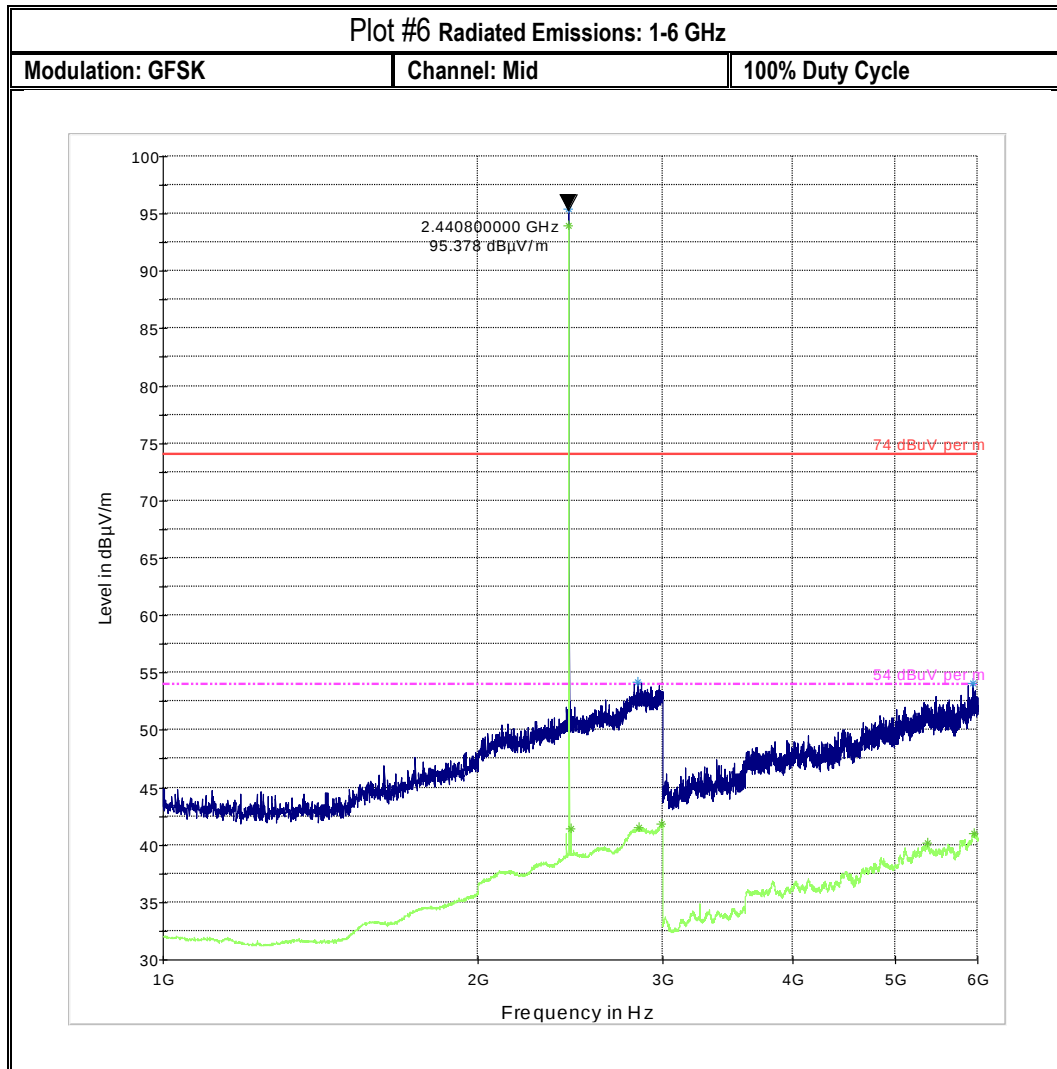



Plot #7 Radiated Emissions: 6-18 GHz


Modulation: GFSK


Channel: Mid


100% Duty Cycle

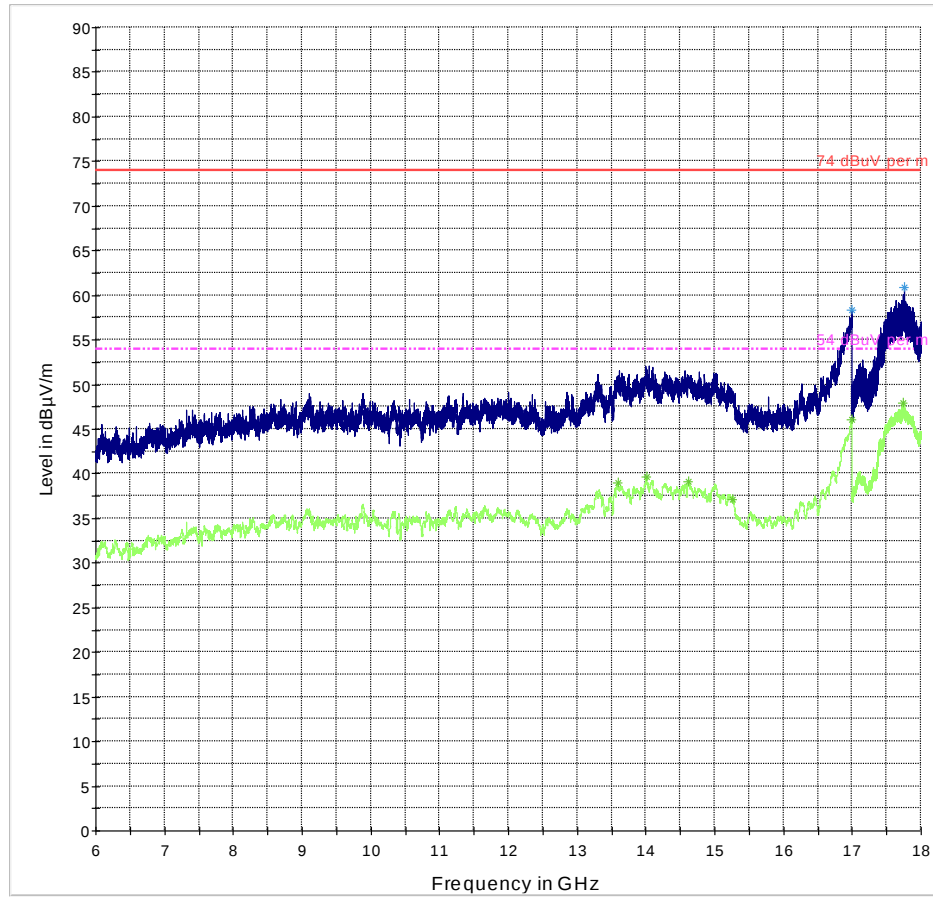

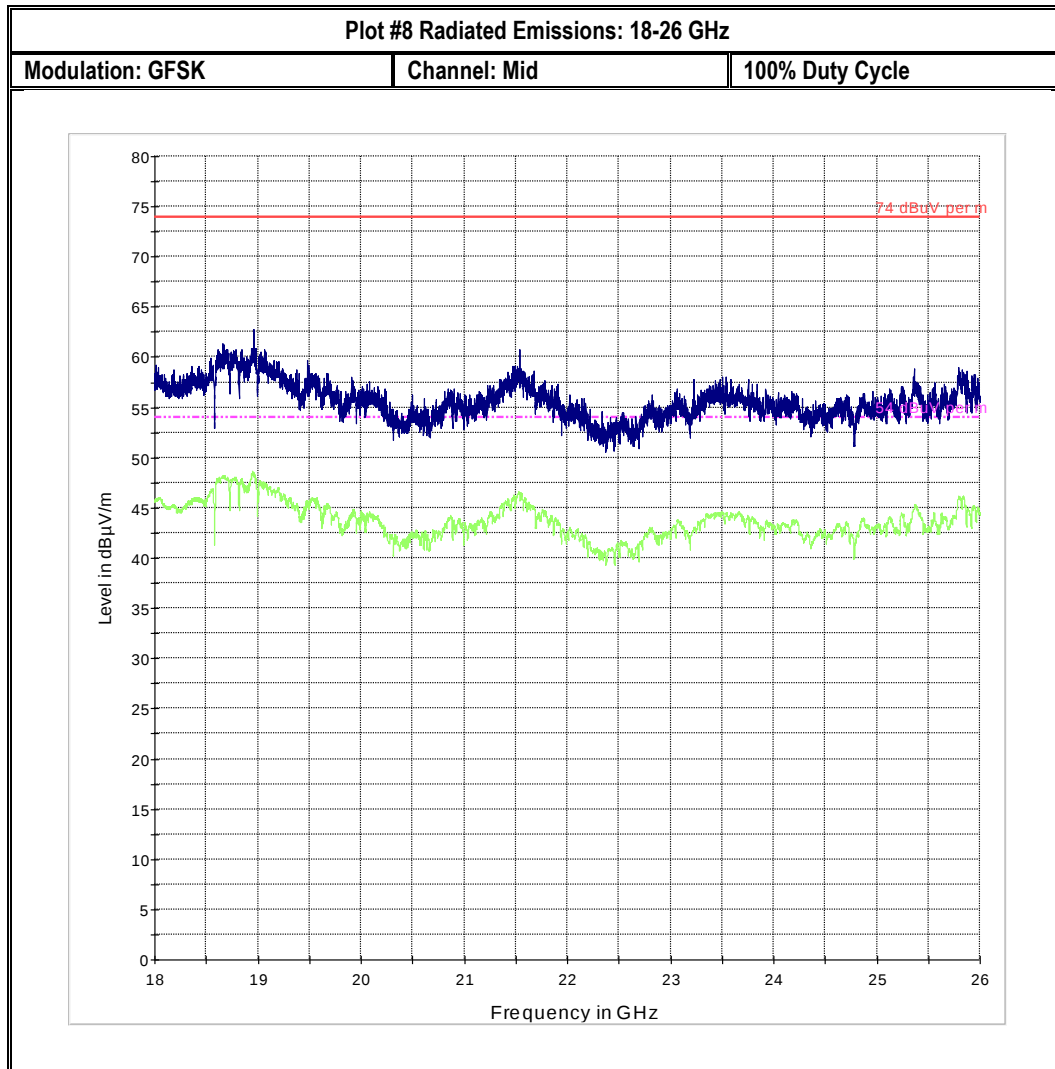

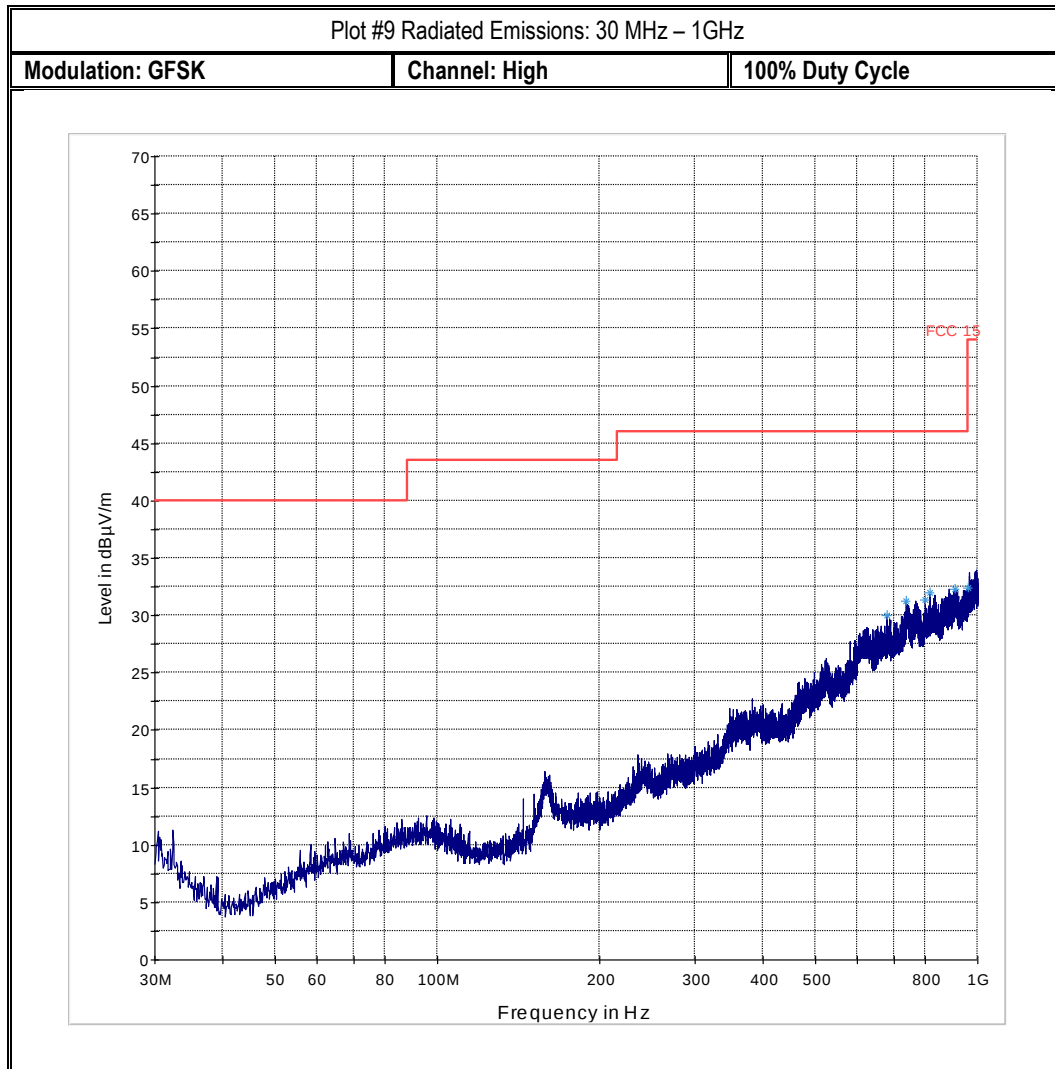

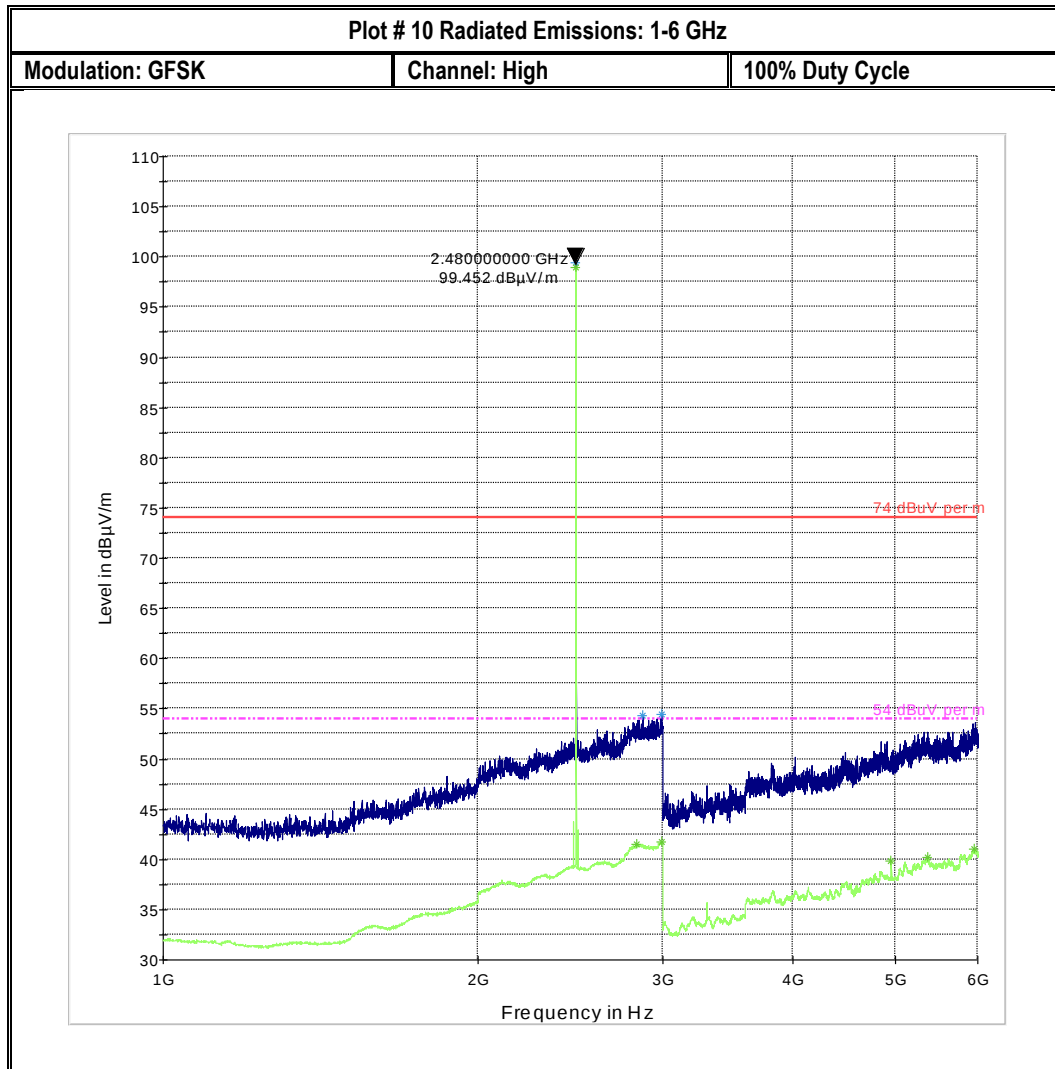

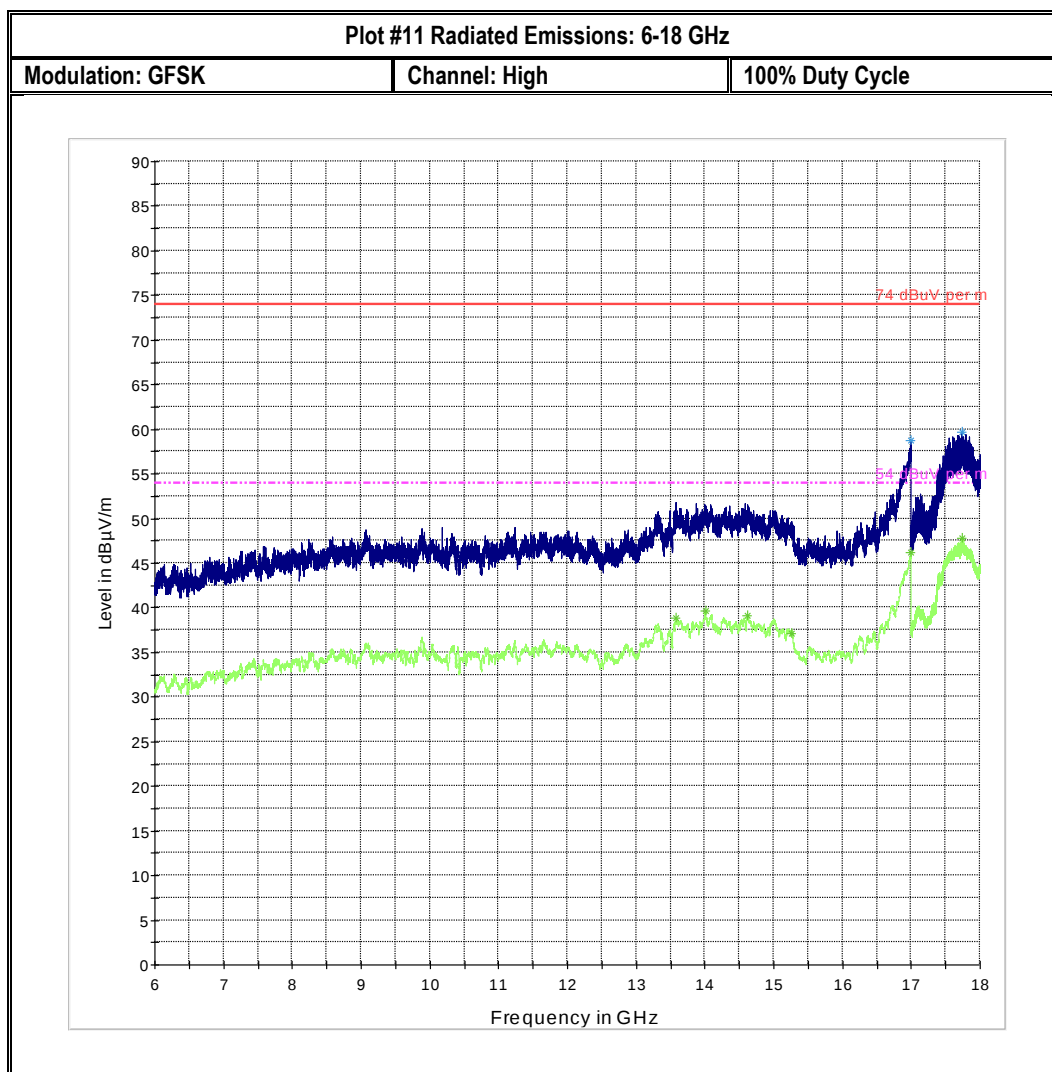

8.8 AC Power Line Conducted Emissions

8.8.1 Measurement according to ANSI C63.10 (2013)

Analyzer Settings:

RBW = 9 KHz (CISPR Bandwidth)

Detector: Peak / Average for Pre-scan

Quasi-Peak/Average for Final Measurements

8.8.2 Limits: §15.207 & RSS-Gen 8.8

(a) Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between frequency ranges.

Table 1:

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

8.8.3 Test conditions and setup:

Ambient Temperature (C)	EUT Set-Up #	EUT operating mode	Power line (L1, L2, L3, N)	Power Input
22	3,4	GFSK	Line & Neutral	110V / 60Hz

8.8.4 Measurement Result:

Plot #	Port	EUT Set-Up #:	EUT operating mode	Scan Frequency	Limit	Result
1	AC Mains	2	1	150 kHz – 30 MHz	See section 8.8.2	Pass
2	AC Mains	3	1	150 kHz – 30 MHz	See section 8.8.2	Pass

8.8.5 Measurement Plots:

Plot #1

Emissions Test Data

1 / 1


CETECOMTM

EUT Information

EUT Name: Z76
 Manufacturer: ACI
 Serial Number: CC2PTD1UGQN7
 Hardware Rev:
 Software Rev:
 Comment: laptop

Disclaimer: Any measurement data within 1dB from the limit line is conditional PASS/FAIL, due to measurement uncertainty considerations.

CISPR 22 Mains Conducted FCC_LISN

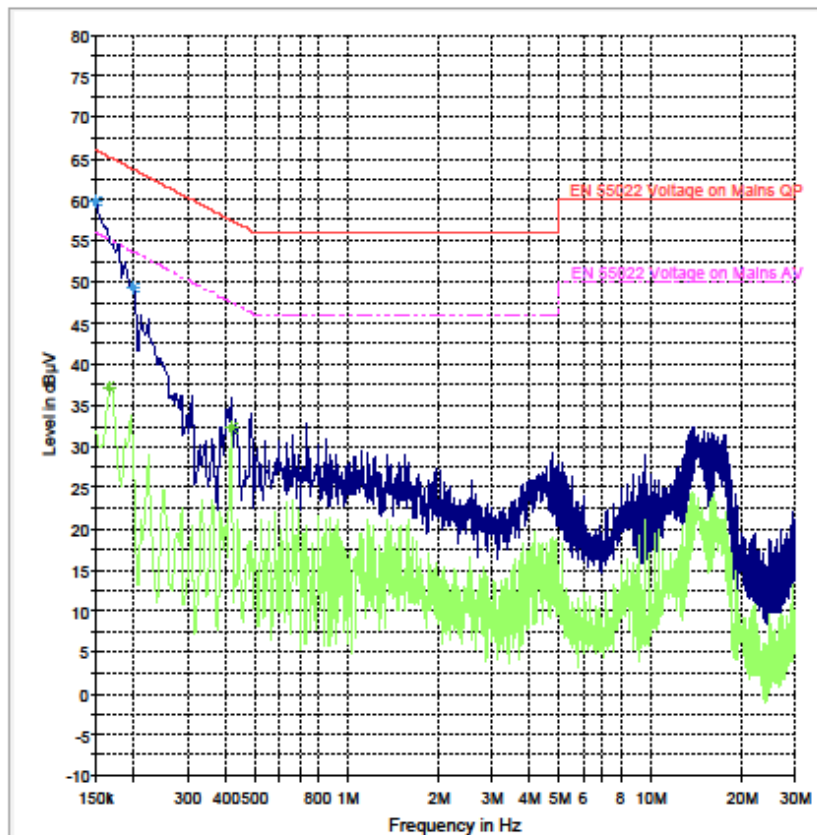

Plot #2

Emissions Test Data

1 / 1



EUT Information


EUT Name: Z76
 Manufacturer: ACI
 Serial Number: CC2PT01UGQN7
 Hardware Rev:
 Software Rev:
 Comment: AC

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154000	47.6	20.0	9.000	GND	N	1.1	18.2	65.8	
0.210000	38.6	20.0	9.000	GND	L1	0.8	24.6	63.2	
0.270000	31.4	20.0	9.000	GND	N	0.6	29.7	61.1	
0.390000	39.8	20.0	9.000	GND	N	0.5	18.2	58.1	

Definition: Any measurement data within 3dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.

CISPR 22 Mains Conducted FCC_LISN

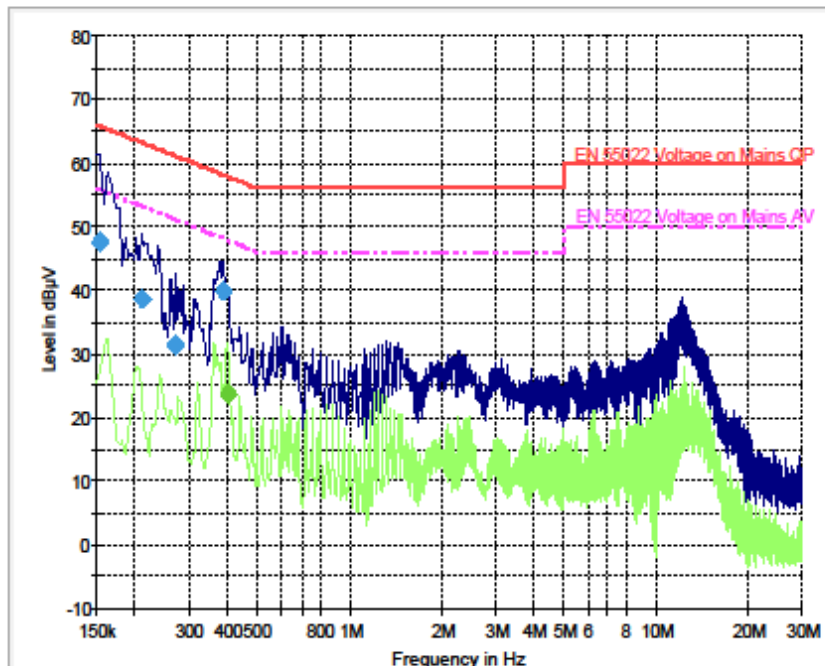

9 Test Equipment And Ancillaries Used For Testing

No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
	Turn table	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	High Pass Filter	5HC2700	Trilithic Inc.	9926013	Part of system calibration	
	High Pass Filter	4HC1600	Trilithic Inc.	9922307	Part of system calibration	
	6GHz High Pass Filter	HPM50106	Microtronics	001	Part of system calibration	
	Pre-Amplifier	JS4-00102600	Miteq	00616	Part of system calibration	
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer	Rohde&Schwarz	ESU 40	100251	July 2015	2 Year
	Spectrum Analyzer	Rohde&Schwarz	FSU	200302	July 2015	2 Years
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHZ HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Apr 2012	4 Years
	Binconilog Antenna	ETS	3149	J000123908	Mar 2014	4 years
	Horn Antenna	EMCO	3115	35114	Mar 2012	4 Years
	Loop Antenna	EMCO	6512	00049838	Apr 2014	4 years
	LISN	R&S	ESH3-Z5	836679/003	Jun 2013	4 Years
	Fast Power Detector 5Ms/s	ETS Lindgren	7002-006	00160034	Sep 2014	2 Years

10 Revision History

Date	Report Name	Changes to report	Report prepared by
2015-07-31	EMC-APPLE-144-14002-A1535-15.247-BT	Initial Version	Franz Engert