

## 8.5. 802.11n HT20 SISO MODE IN THE 2.4 GHz BAND

### 8.5.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.



#### RESULTS for Chain 0



Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.64	0.5
Mid	2437	17.61	0.5
High_11	2462	17.61	0.5
High_12	2467	17.61	0.5
High_13	2472	17.64	0.5


#### RESULTS for Chain 1

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.61	0.5
Mid	2437	17.61	0.5
High_11	2462	17.61	0.5
High_12	2467	17.64	0.5
High_13	2472	17.61	0.5


**6 dB BANDWIDTH, Chain 0**

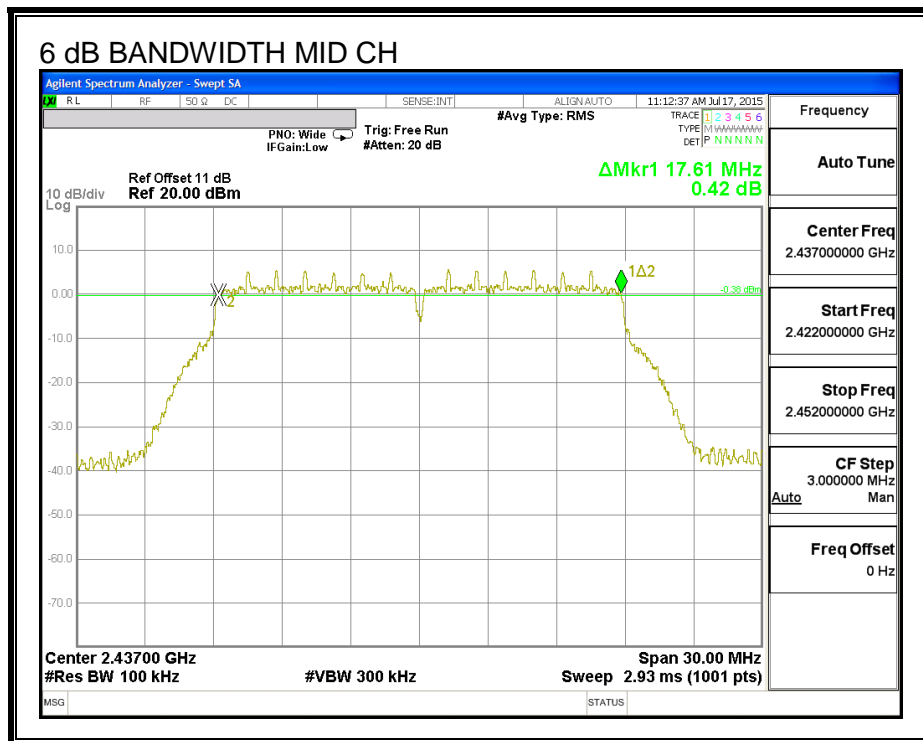
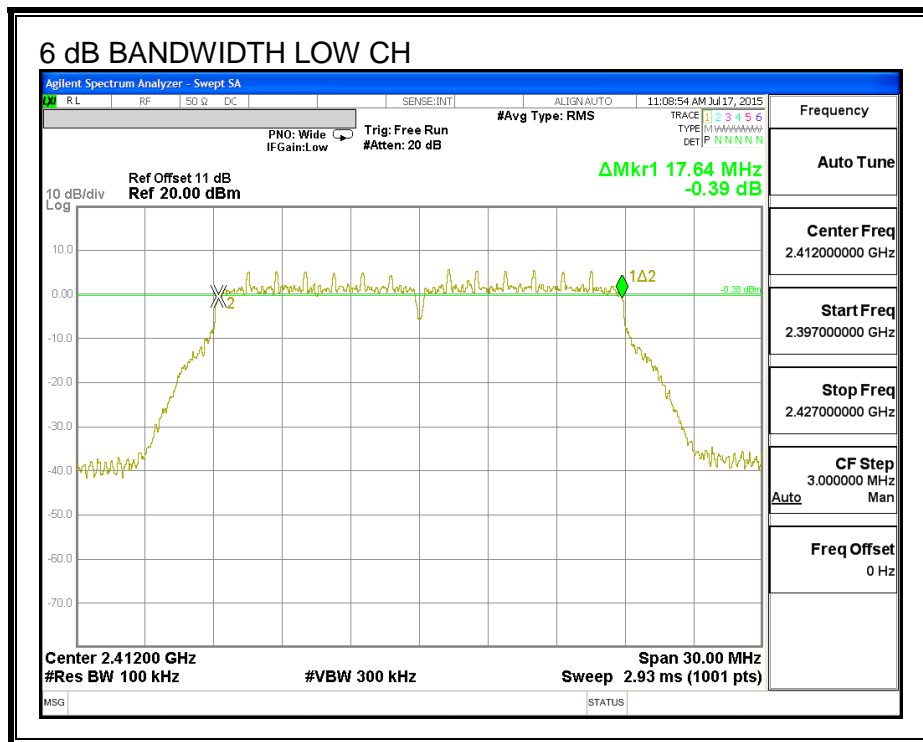


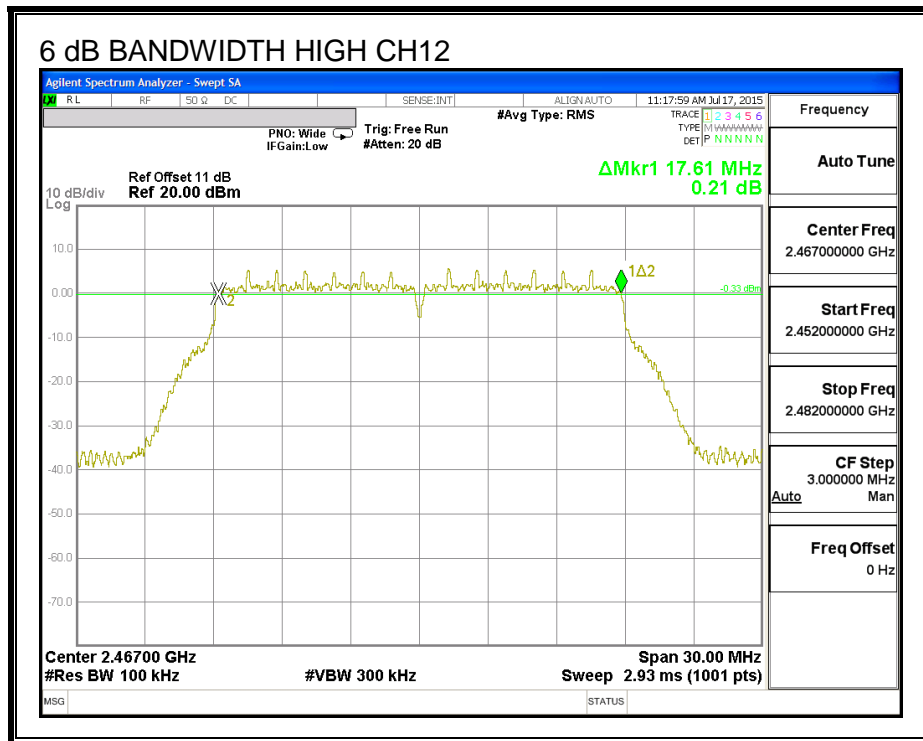
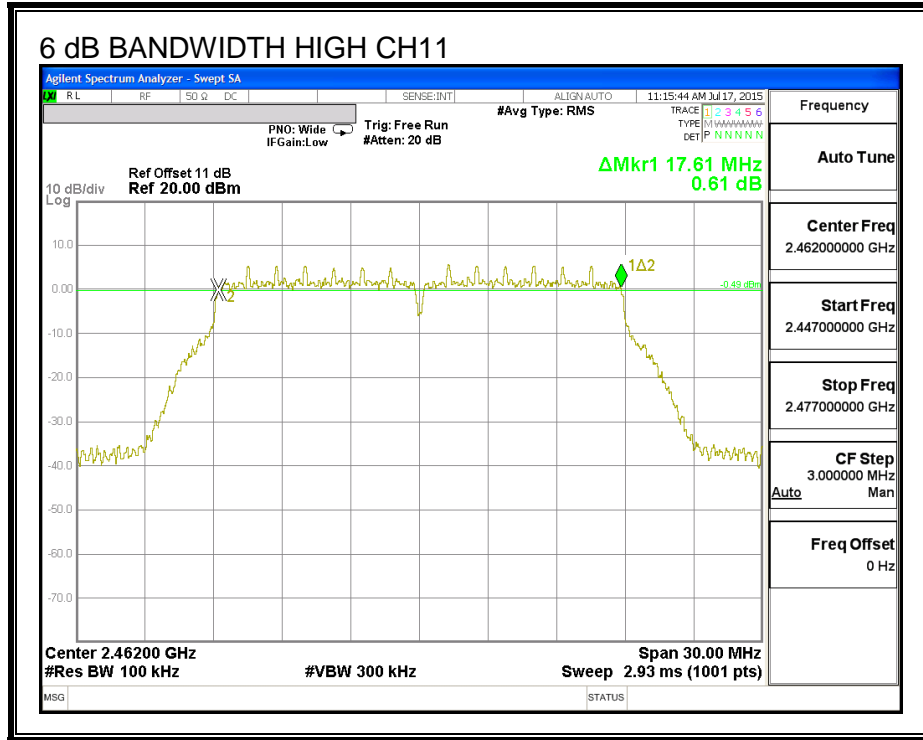


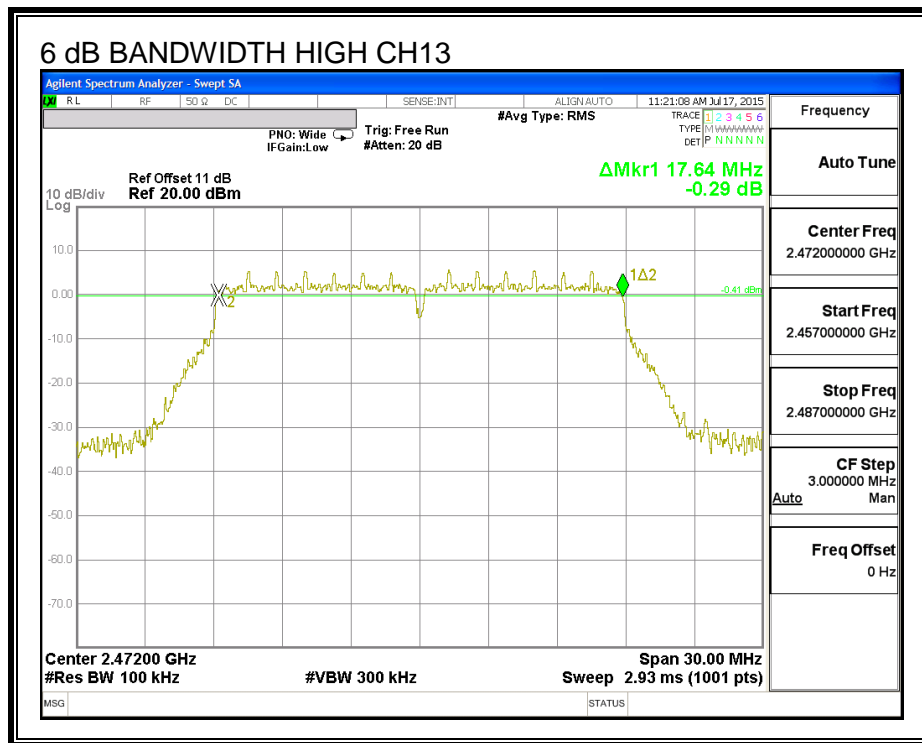

**6 dB BANDWIDTH, Chain 1**

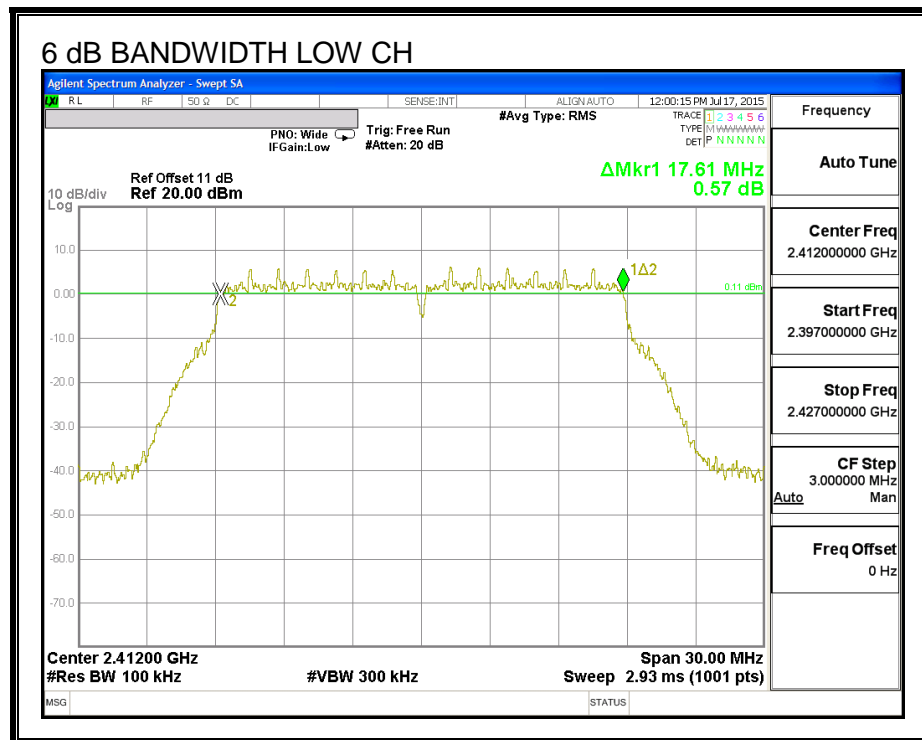

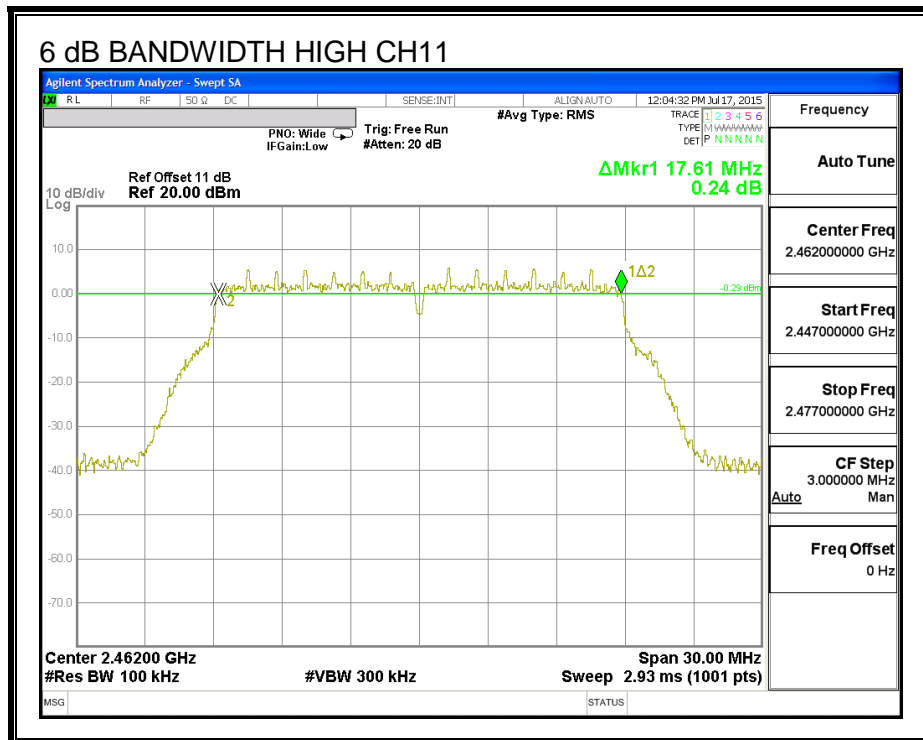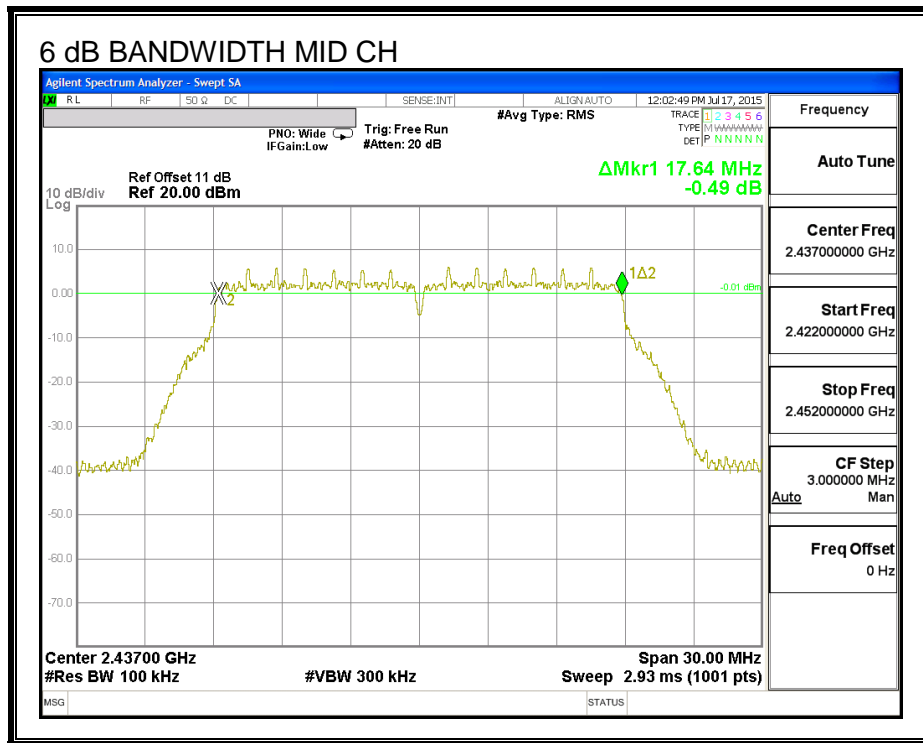

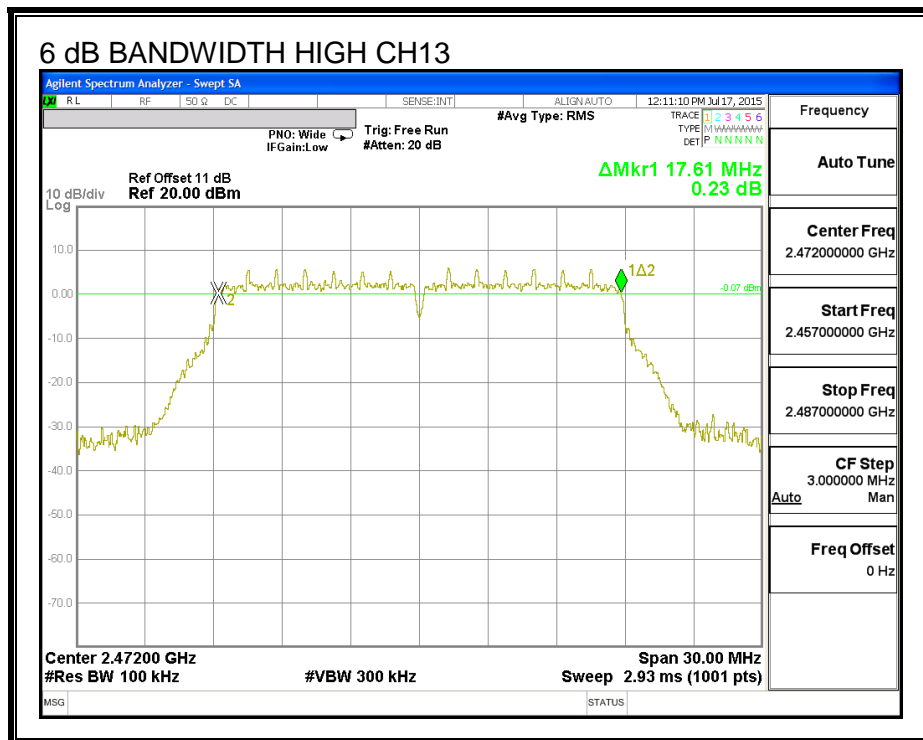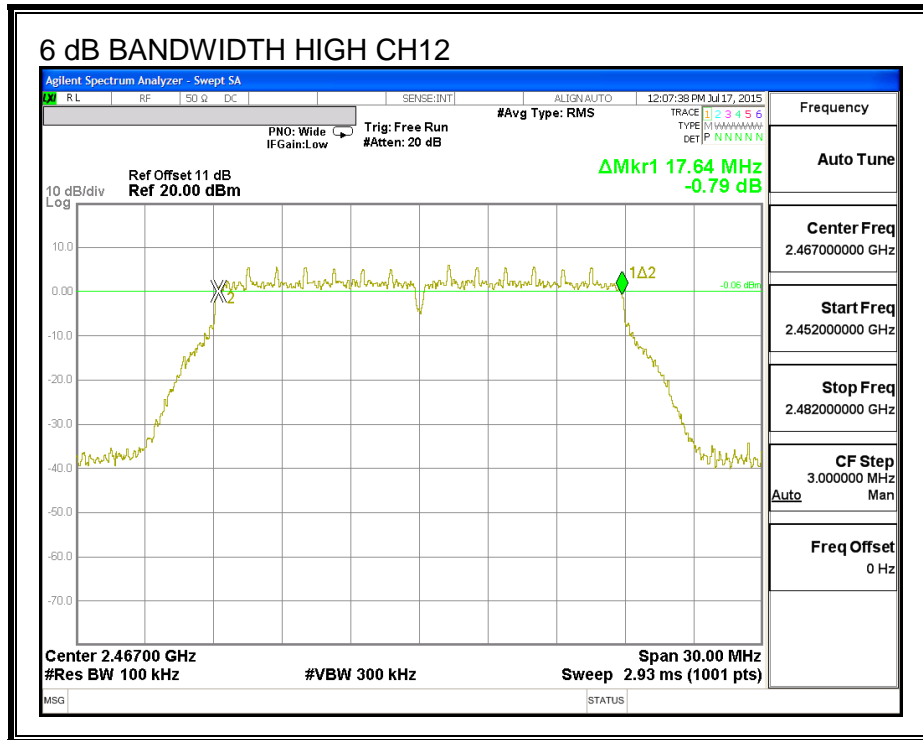

### 8.5.2. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.



#### RESULTS for Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.841
Mid	2437	17.745
High_11	2462	17.789
High_12	2467	17.745
High_13	2472	17.706



#### RESULTS for Chain 1


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.683
Mid	2437	17.742
High_11	2462	17.785
High_12	2467	17.762
High_13	2472	17.730

**99% BANDWIDTH, Chain 0**

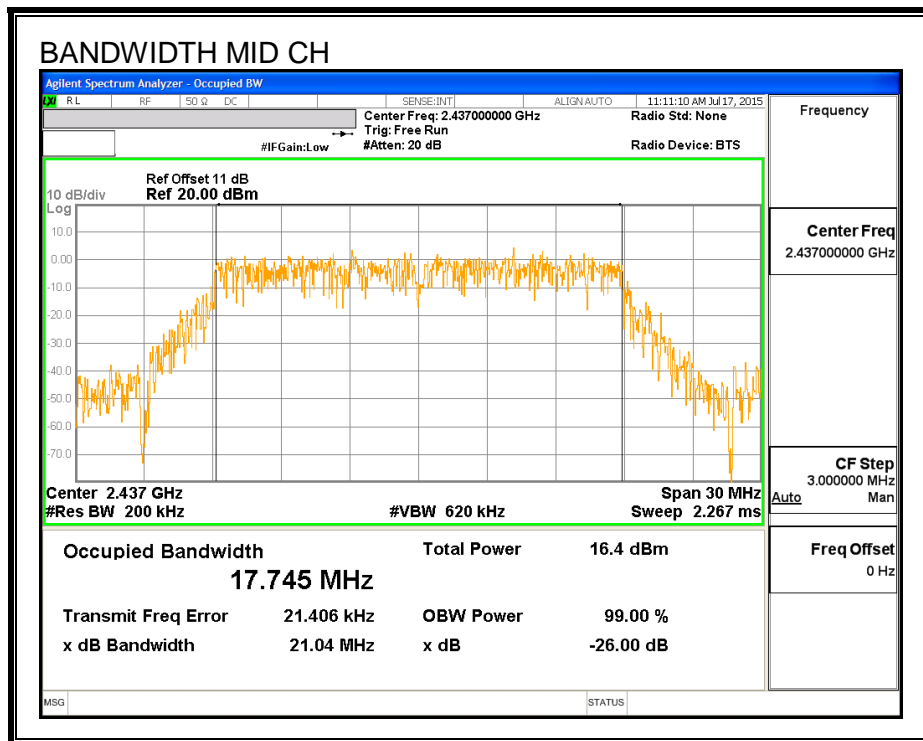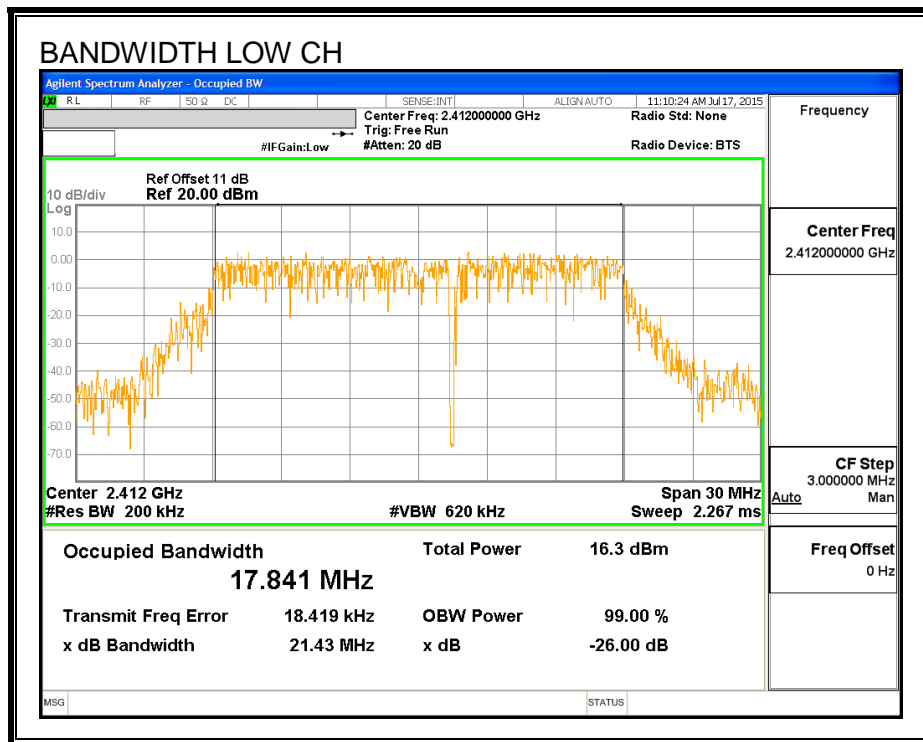






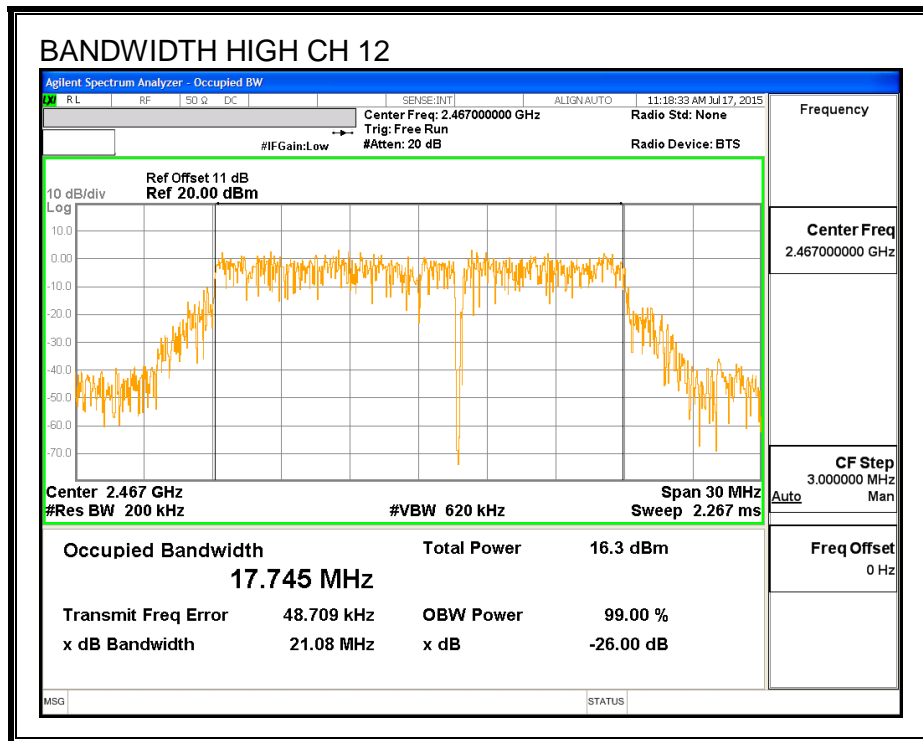
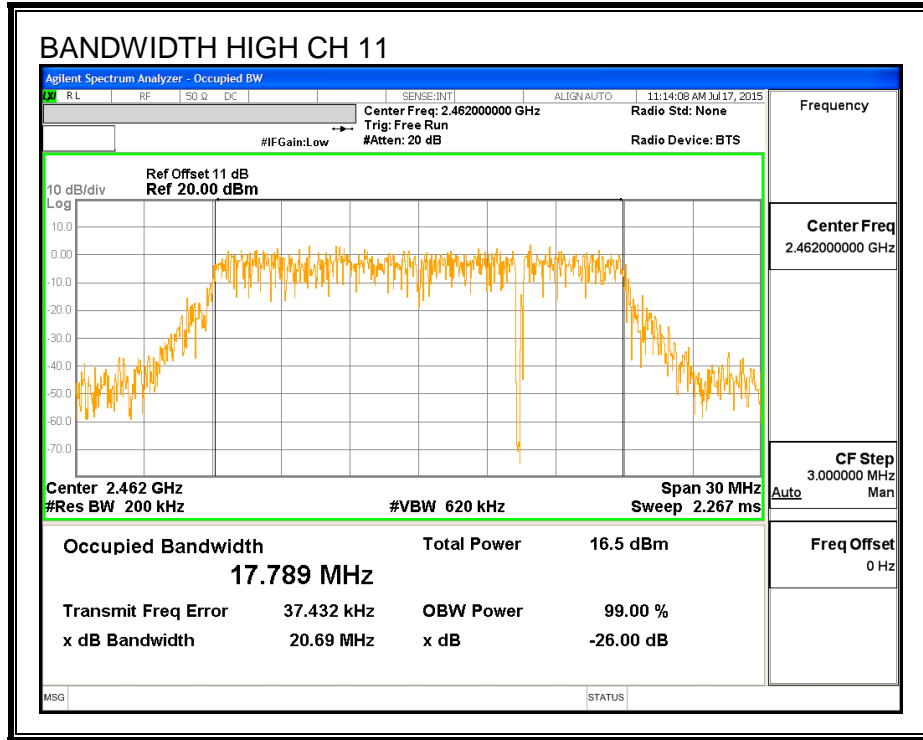


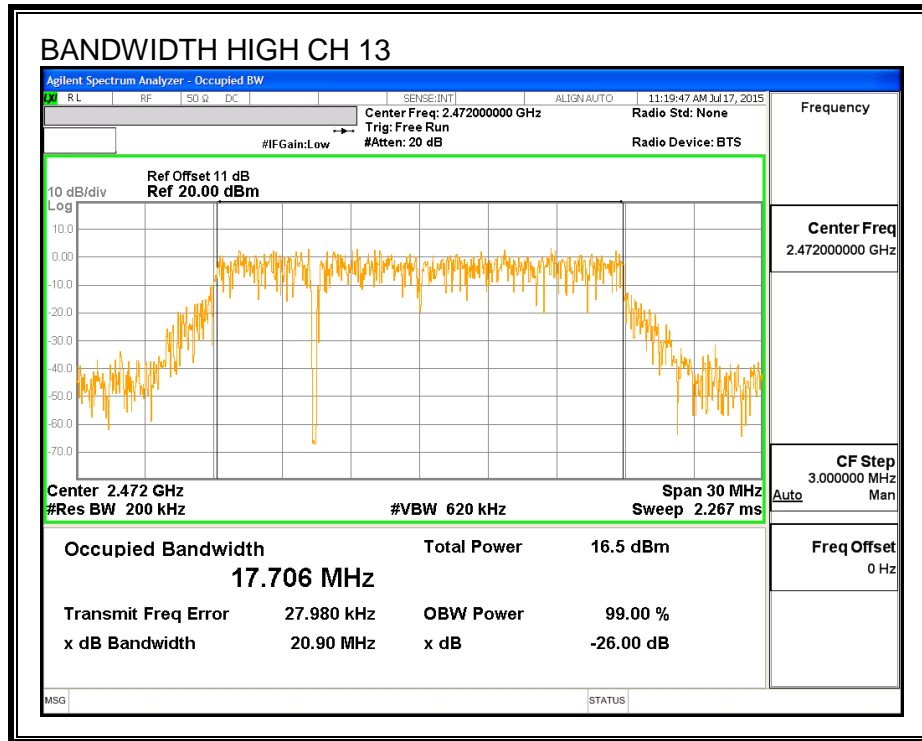

**99% BANDWIDTH, Chain 1**

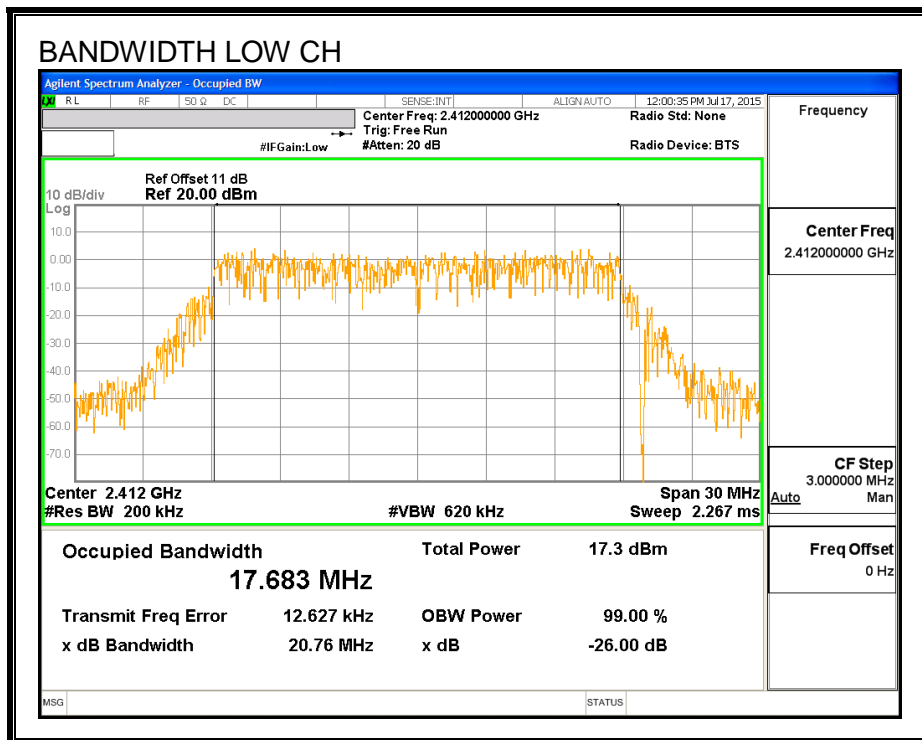

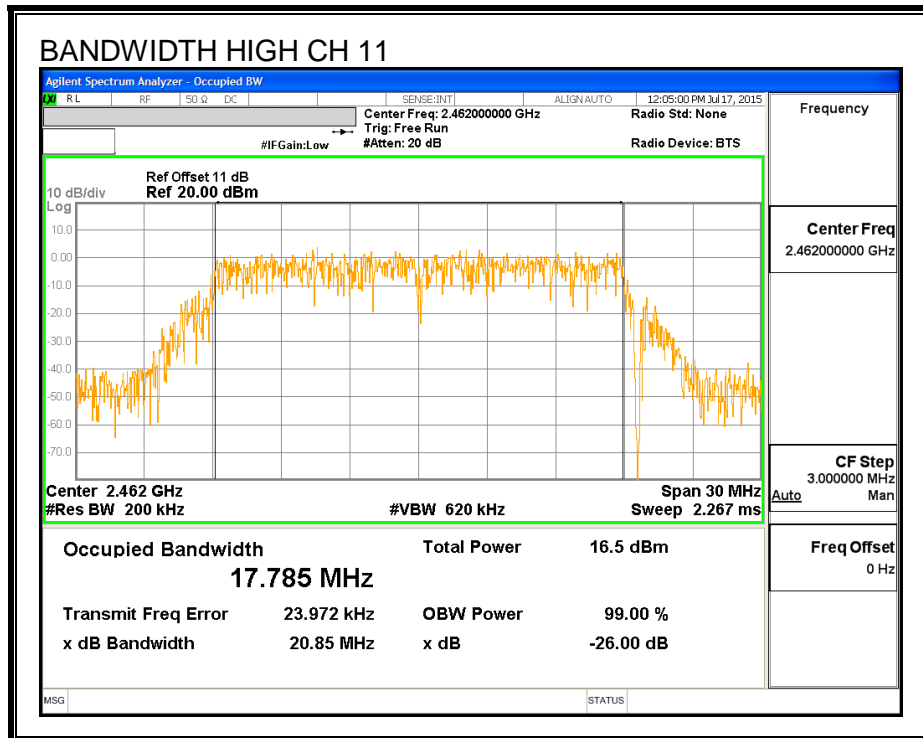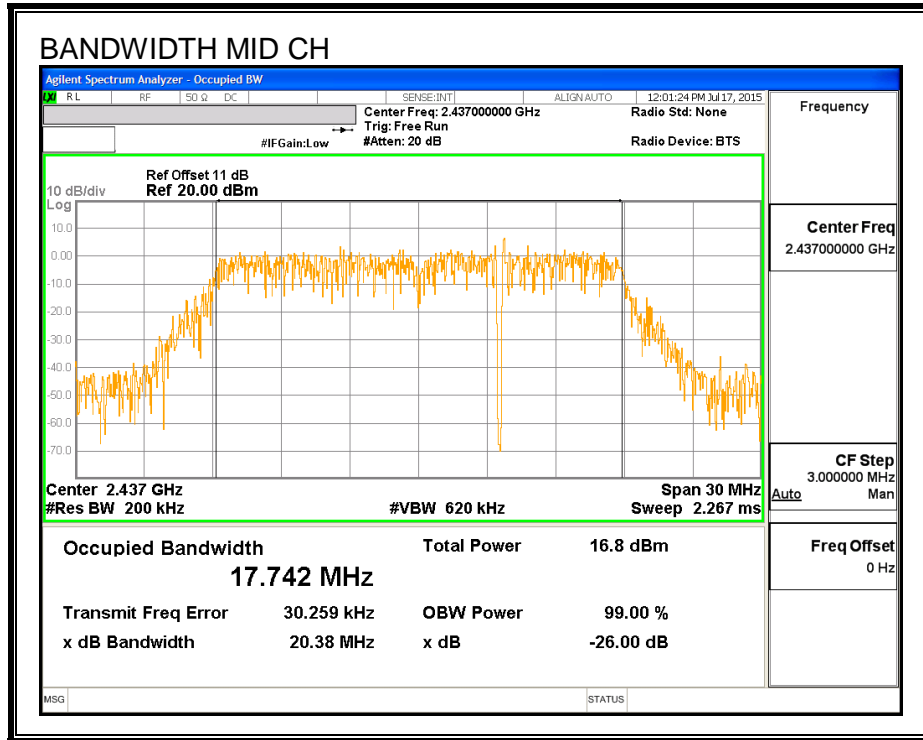

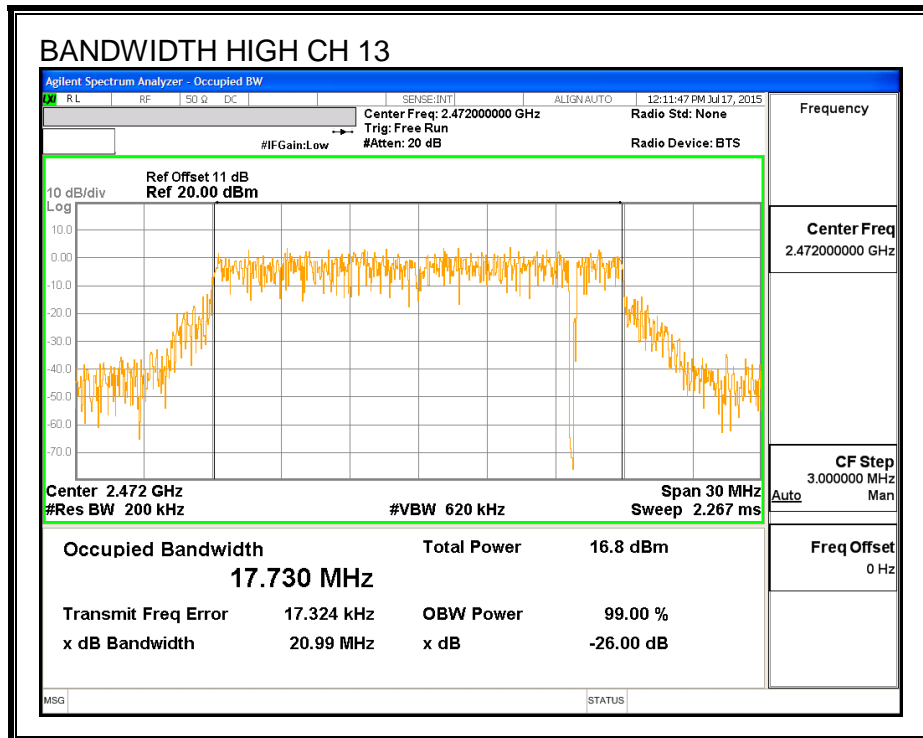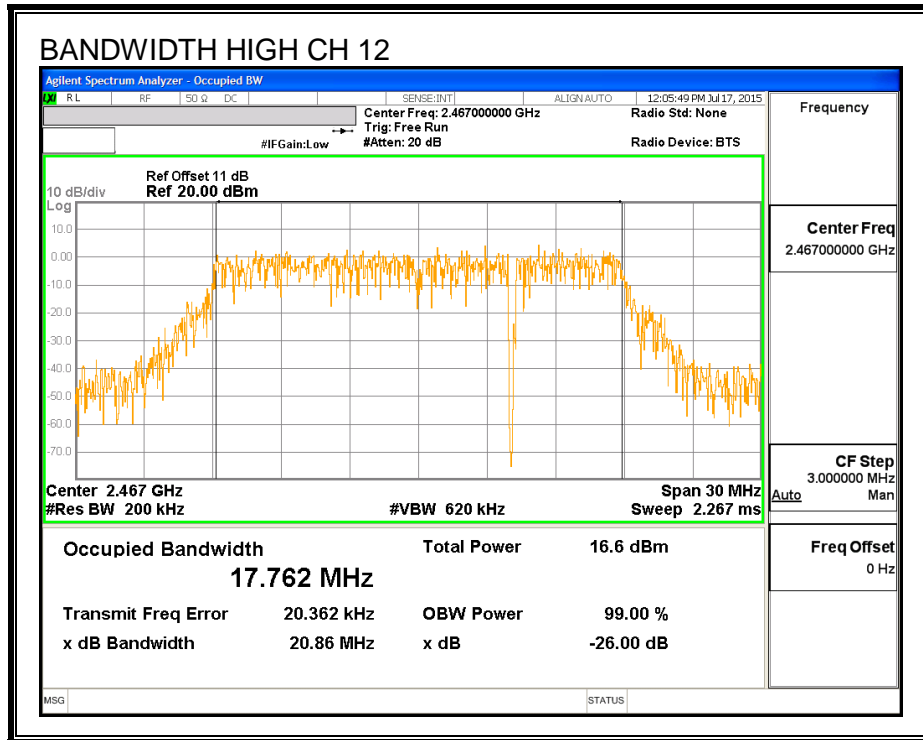

### 8.5.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS for Chain 0

Channel	Frequency (MHz)	Power (dBm)
Low	2412	15.88
Mid	2437	15.86
High_11	2462	14.50
High_12	2467	11.44
High_13	2472	3.37

#### RESULTS for Chain 1

Channel	Frequency (MHz)	Power (dBm)
Low	2412	15.84
Mid	2437	15.83
High_11	2462	14.37
High_12	2467	11.43
High_13	2472	3.36

## 8.5.4. OUTPUT POWER

### LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS FOR Chain 0**

**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-0.60	30.00	30	36	30.00
Mid	2437	-0.60	30.00	30	36	30.00
High_11	2462	-0.60	30.00	30	36	30.00
High_12	2467	-0.60	30.00	30	36	30.00
High_13	2472	-0.60	30.00	30	36	30.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power</b>
---------------------------	------	---

**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	23.19	23.19	30.00	-6.81
Mid	2437	23.13	23.13	30.00	-6.87
High_11	2462	21.78	21.78	30.00	-8.22
High_12	2467	18.68	18.68	30.00	-11.32
High_13	2472	10.63	10.63	30.00	-19.37

**RESULTS FOR Chain 1**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-0.50	30.00	30	36	30.00
Mid	2437	-0.50	30.00	30	36	30.00
High_11	2462	-0.50	30.00	30	36	30.00
High_12	2467	-0.50	30.00	30	36	30.00
High_13	2472	-0.50	30.00	30	36	30.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power</b>
---------------------------	------	---

**Results**

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	23.07	23.07	30.00	-6.93
Mid	2437	23.02	23.02	30.00	-6.98
High_11	2462	21.69	21.69	30.00	-8.31
High_12	2467	18.63	18.63	30.00	-11.37
High_13	2472	10.60	10.60	30.00	-19.40



### 8.5.5. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

#### RESULTS for Chain 0

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-10.60	-10.60	8.0	-18.6
Mid	2437	-10.56	-10.56	8.0	-18.6
High_11	2462	-11.12	-11.12	8.0	-19.1
High_12	2467	-14.82	-14.82	8.0	-22.8
High_13	2472	-22.39	-22.39	8.0	-30.4



#### RESULTS for Chain 1



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


##### PSD Results

Channel	Frequency (MHz)	Chain 1 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-10.27	-10.27	8.0	-18.3
Mid	2437	-10.17	-10.17	8.0	-18.2
High_11	2462	-11.13	-11.13	8.0	-19.1
High_12	2467	-14.35	-14.35	8.0	-22.4
High_13	2472	-22.15	-22.15	8.0	-30.2


**PSD, Chain 0**

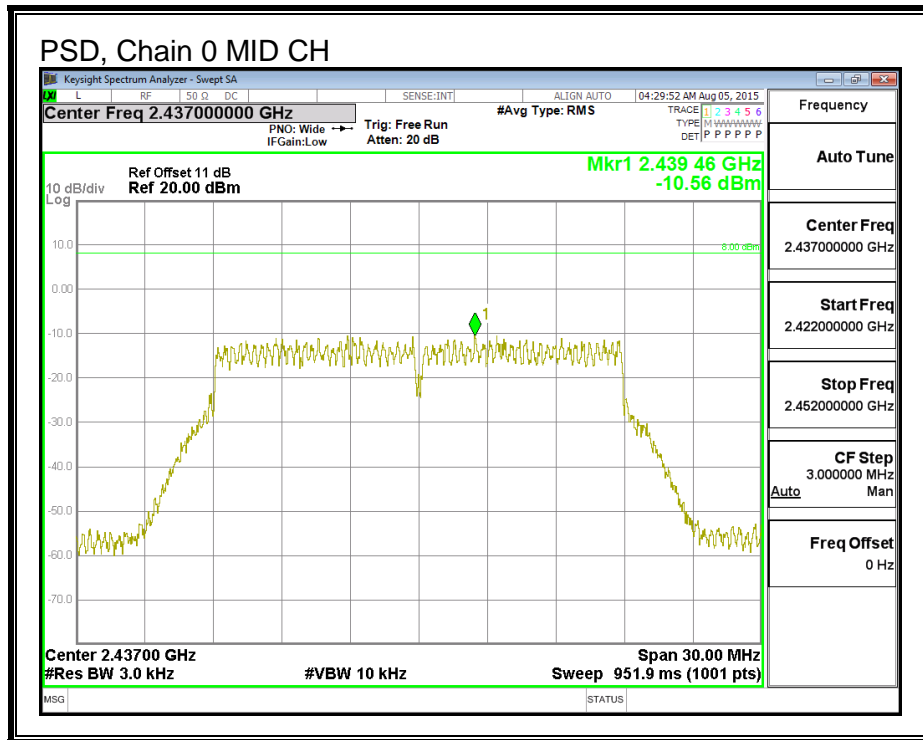
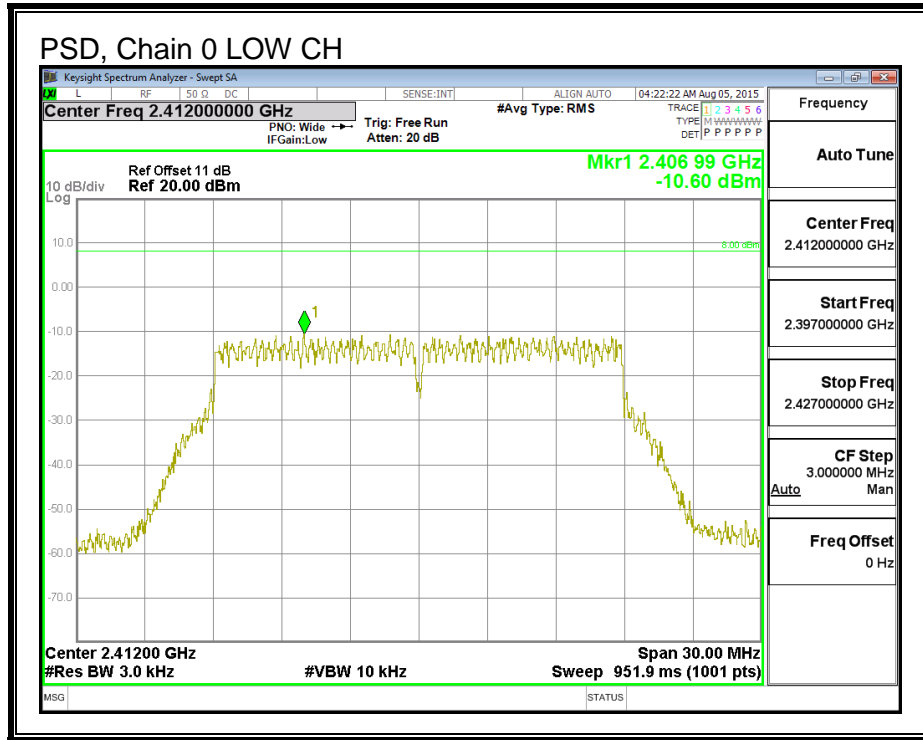


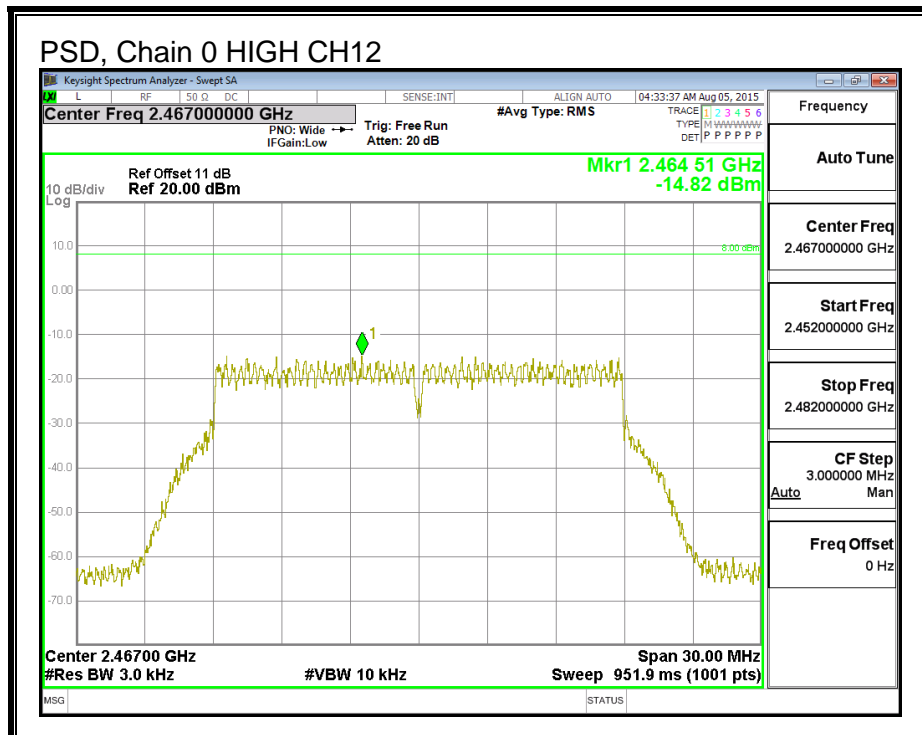
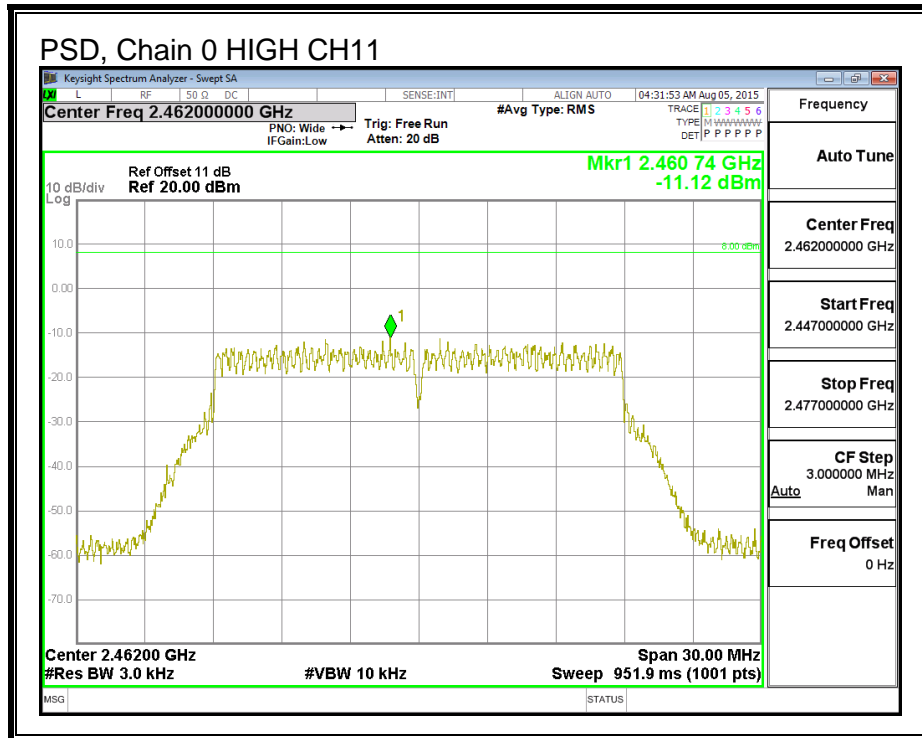


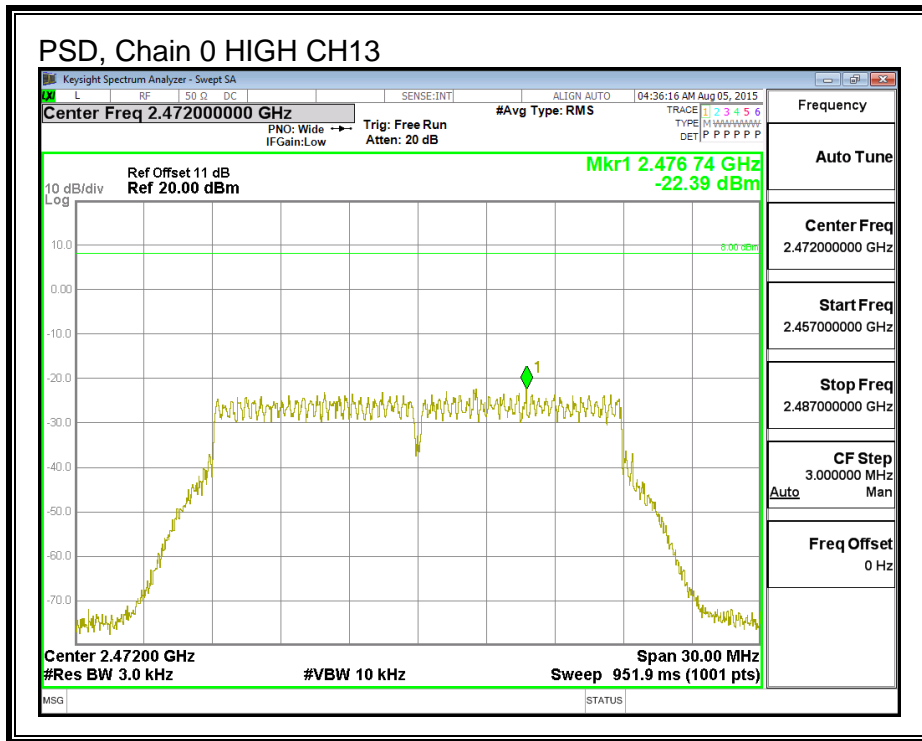

### PSD, Chain 1

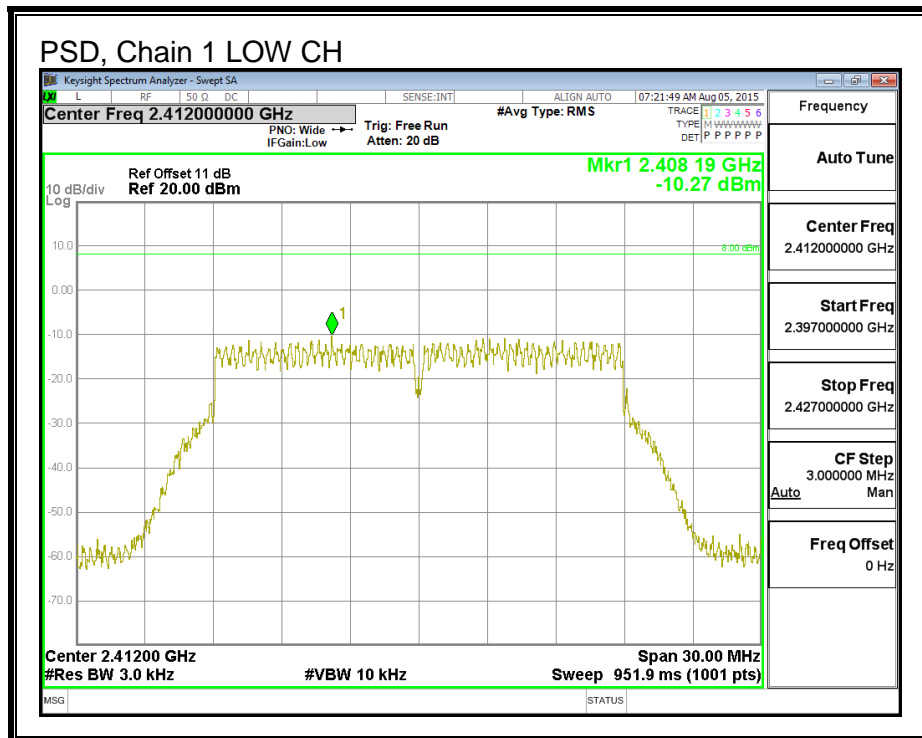

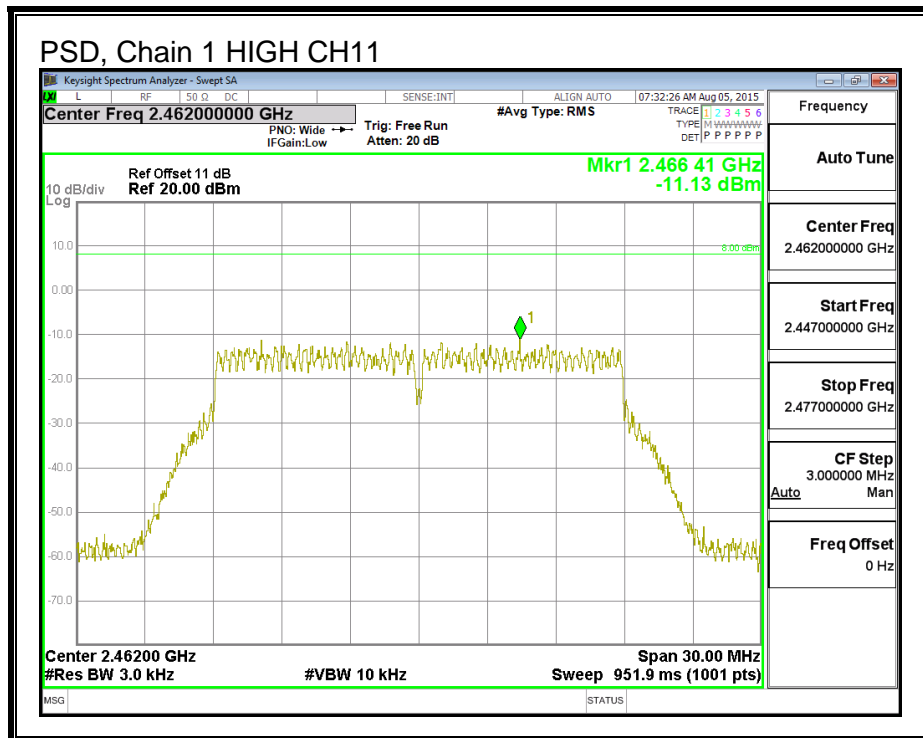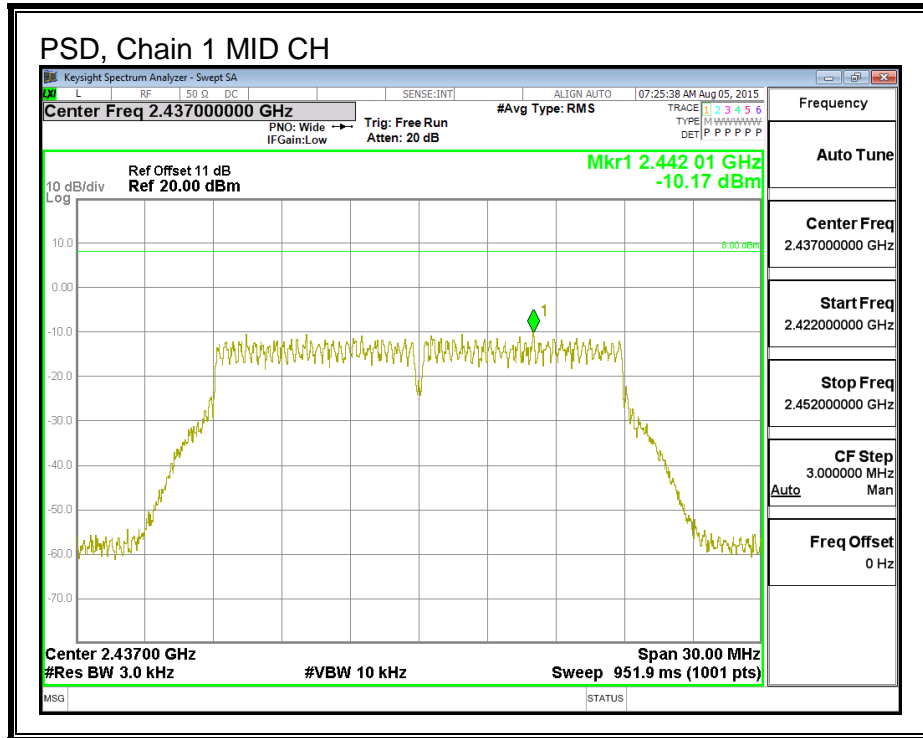

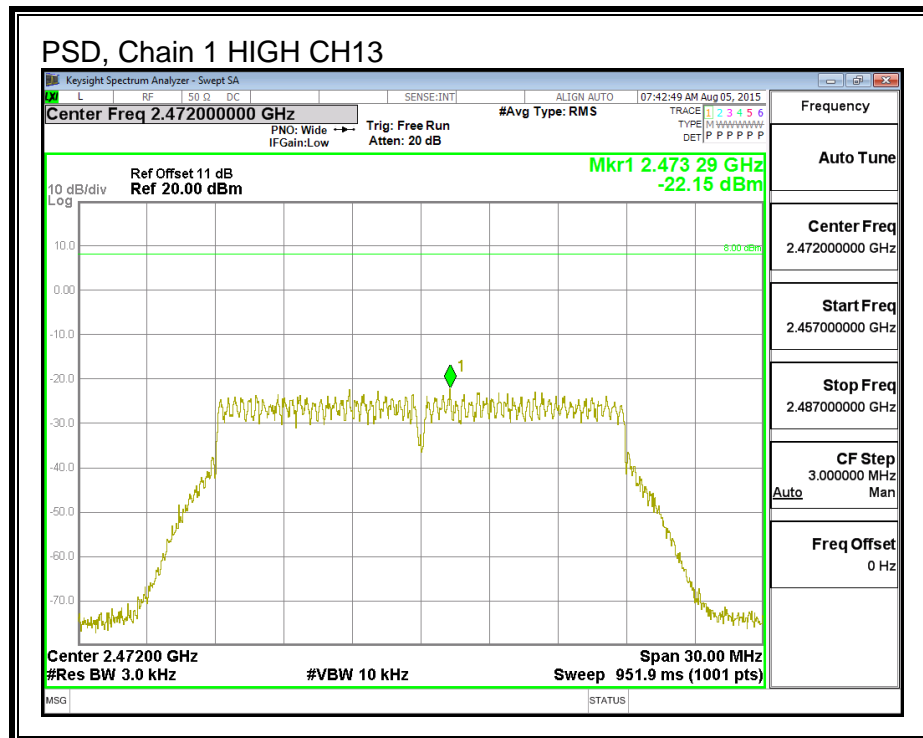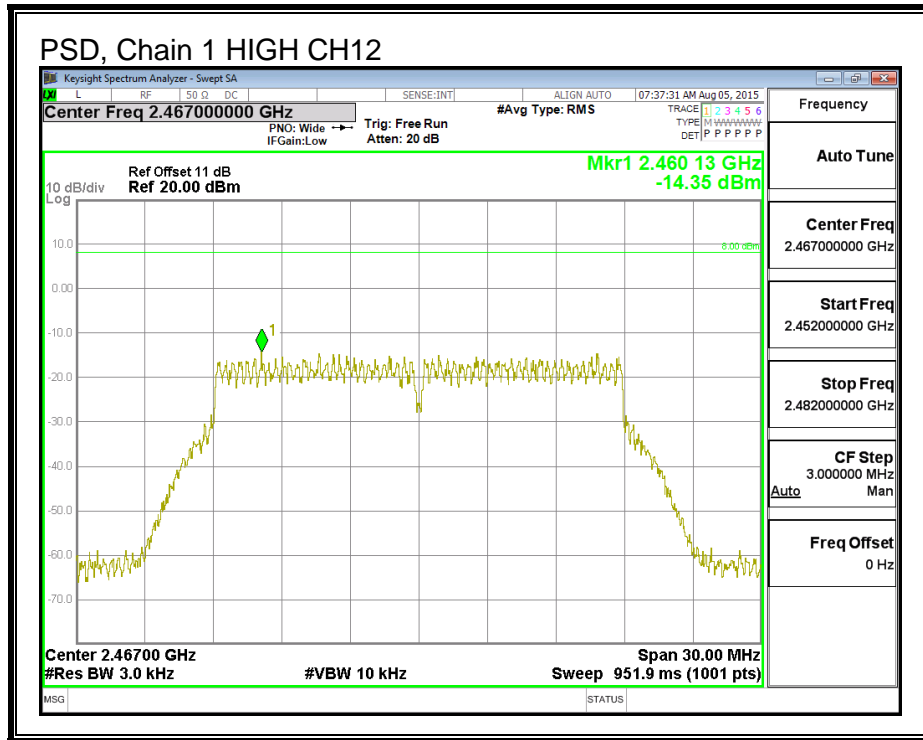

## 8.5.6. OUT-OF-BAND EMISSIONS

### LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

**RESULTS for Chain 0**

**LOW CHANNEL BANDEDGE**

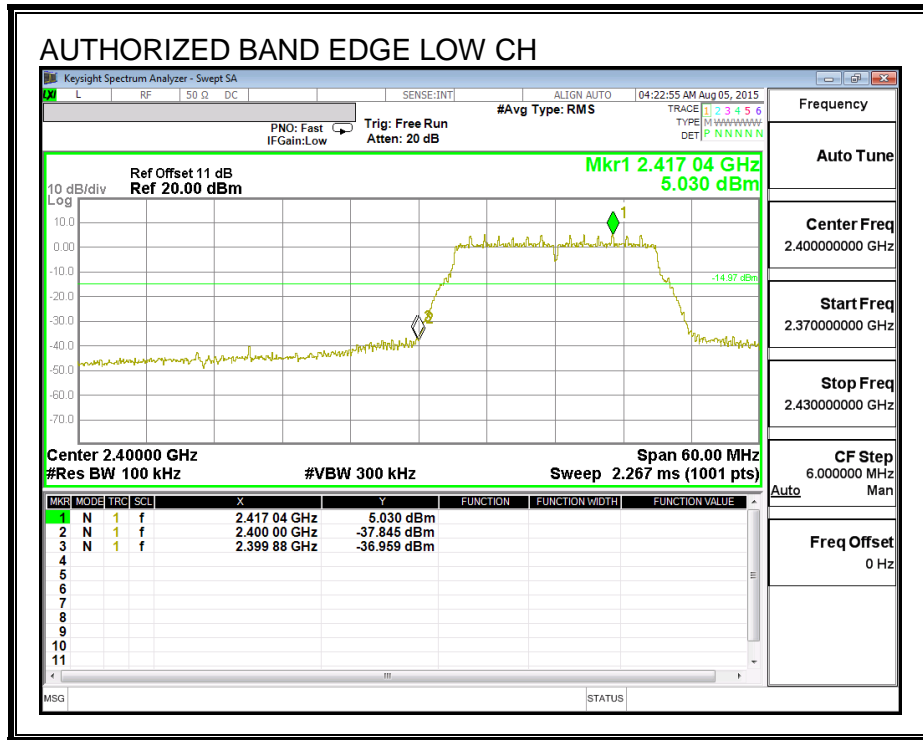




**MID CHANNEL BANDEDGE**

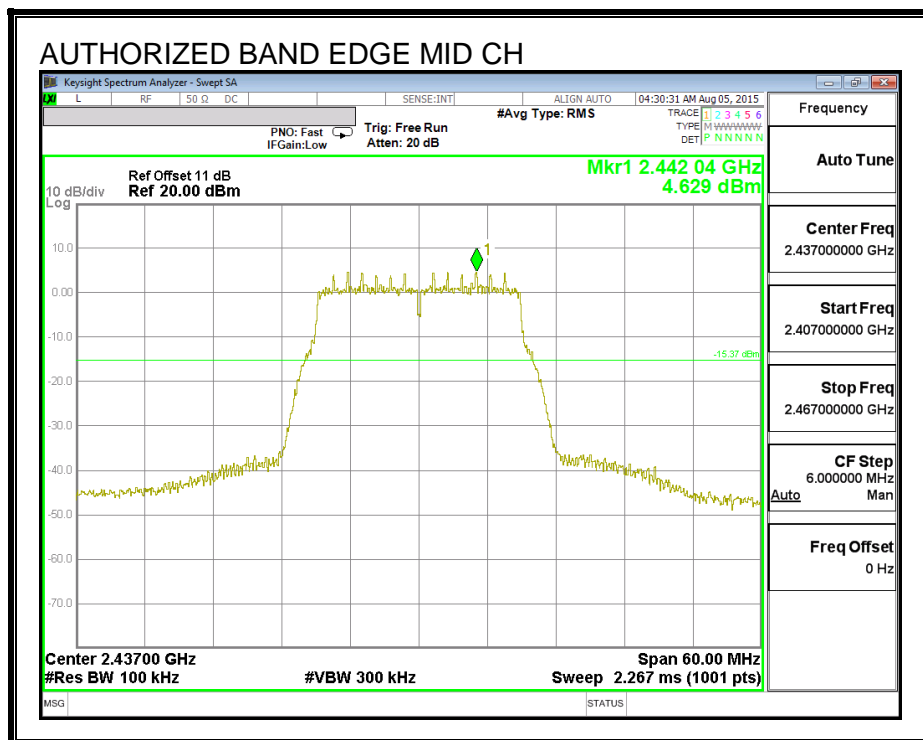







**HIGH CHANNEL BANDEDGE**

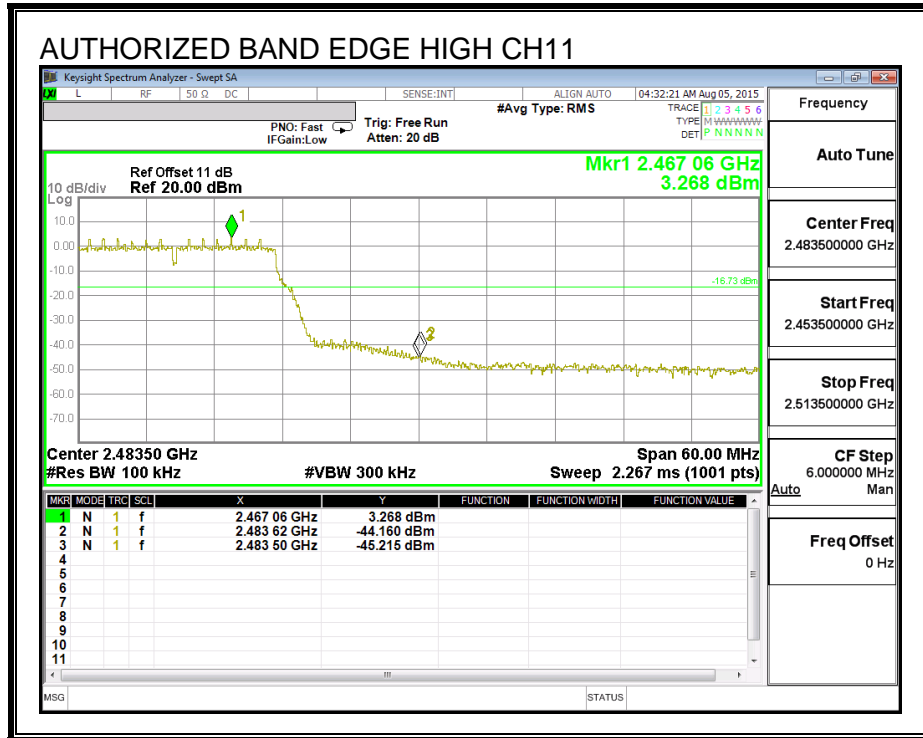


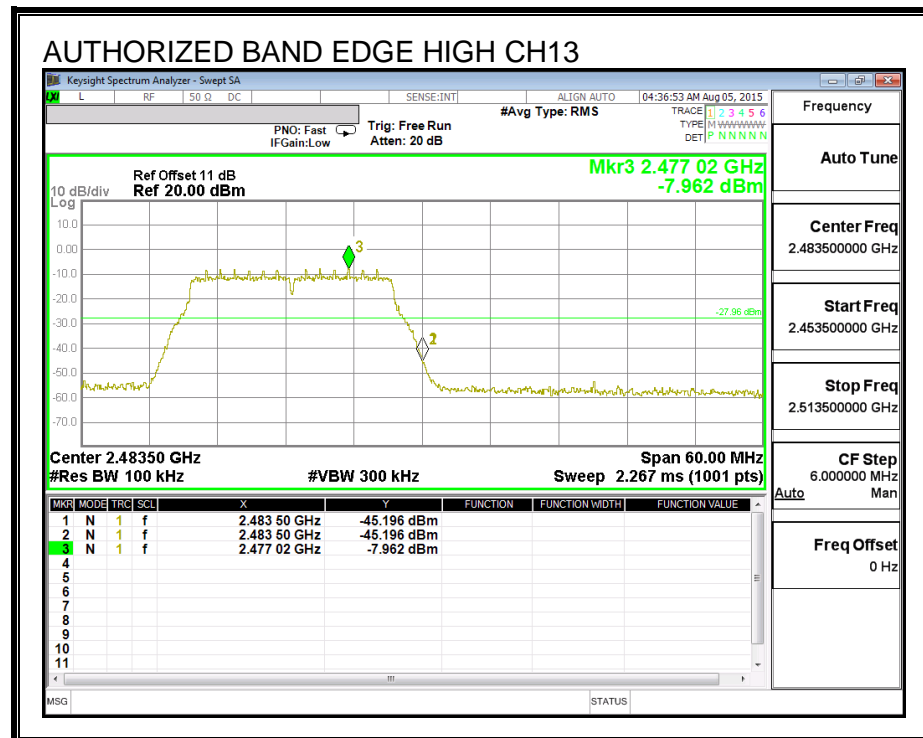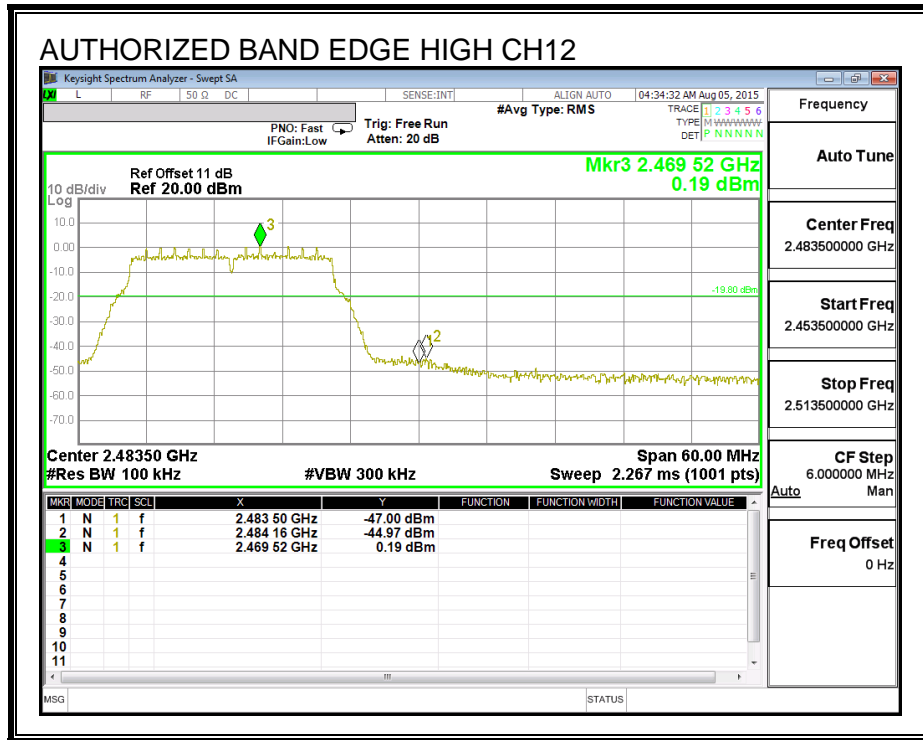

**OUT-OF-BAND EMISSIONS**

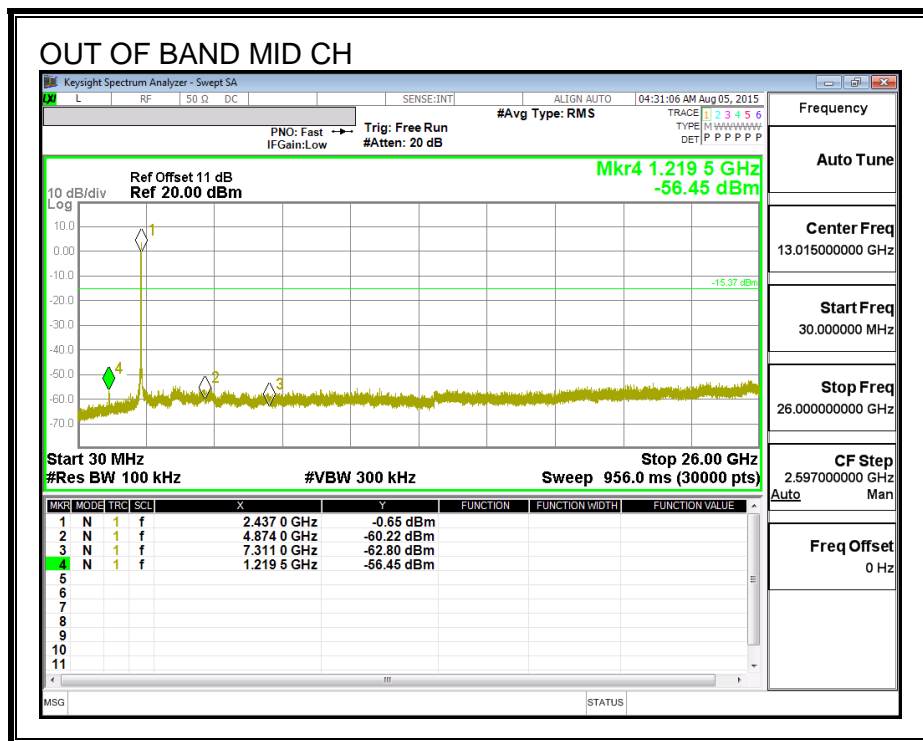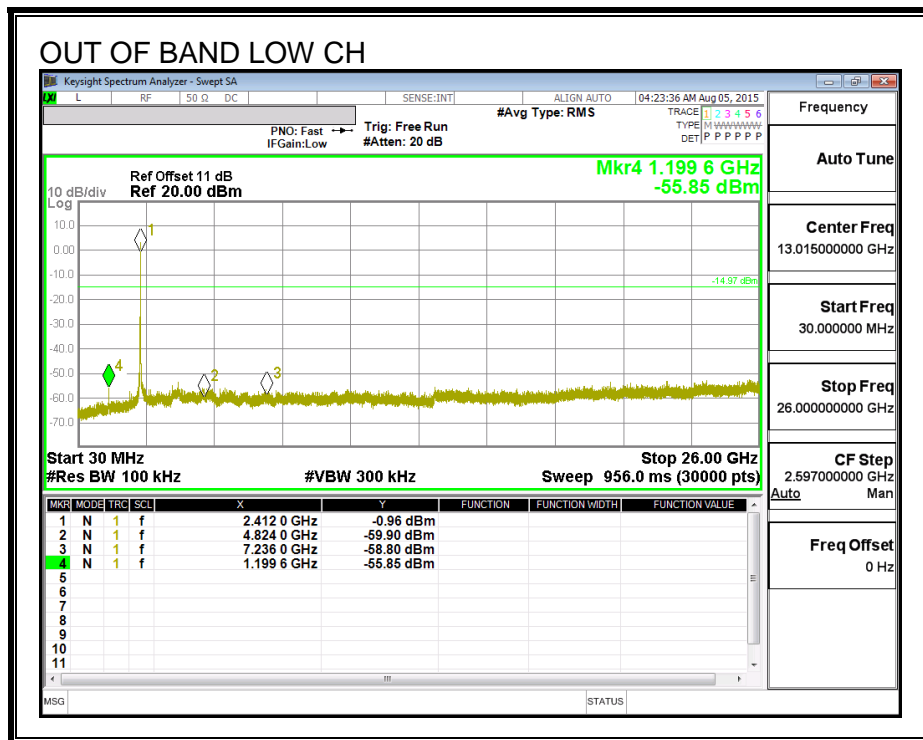


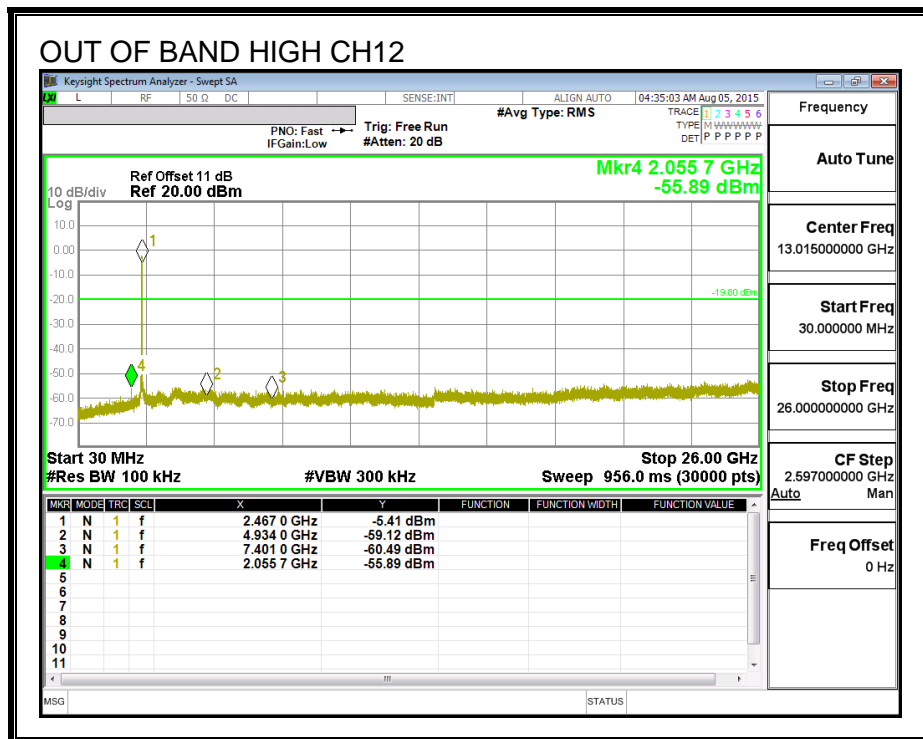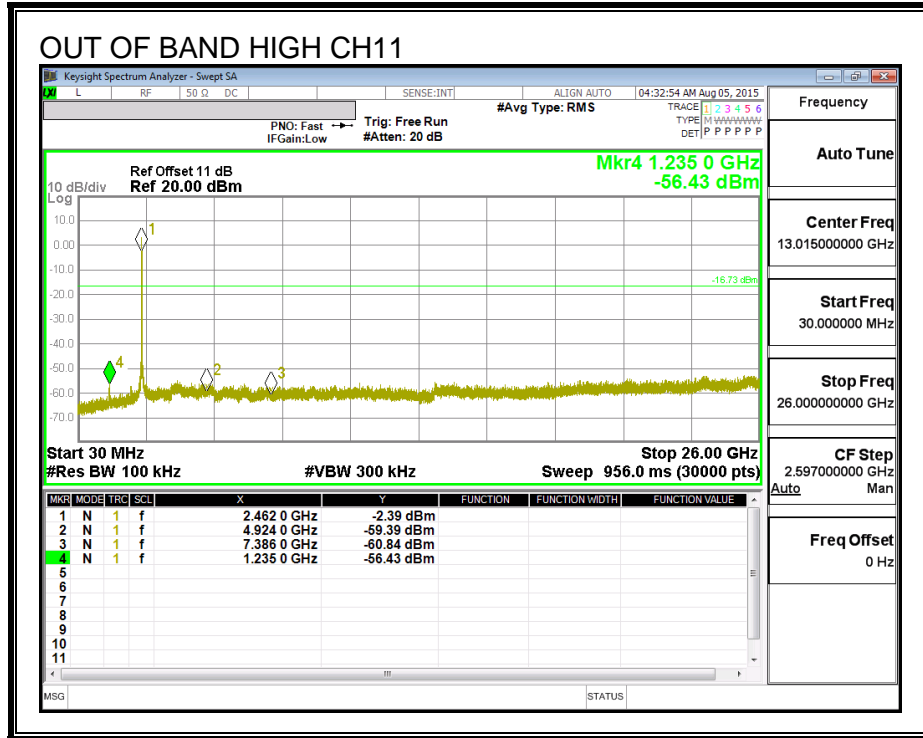

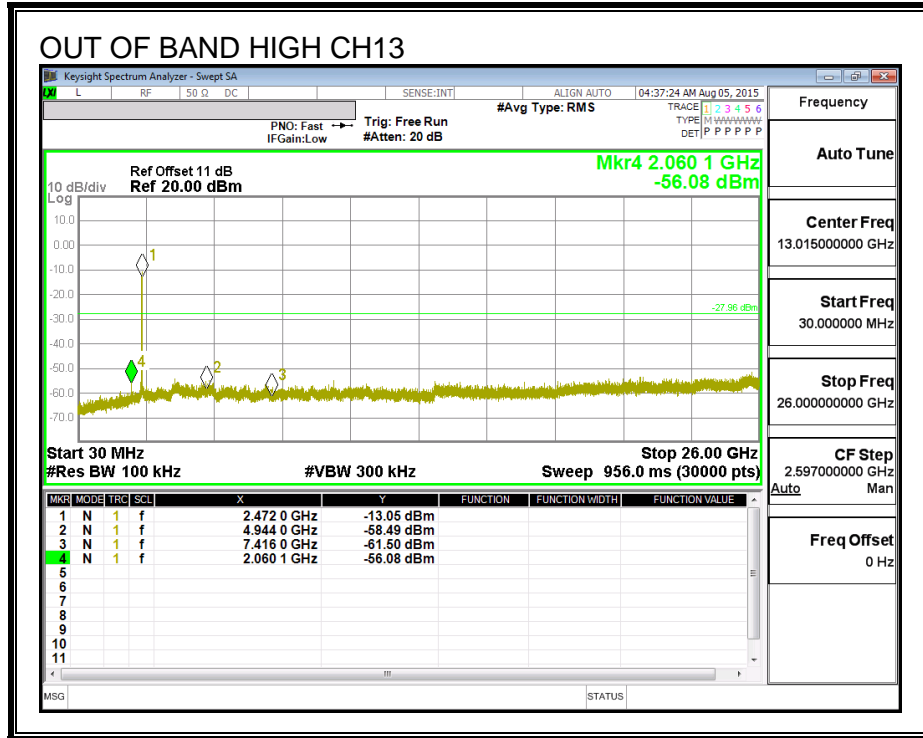


**RESULTS for Chain 1**


**LOW CHANNEL BANDEDGE**


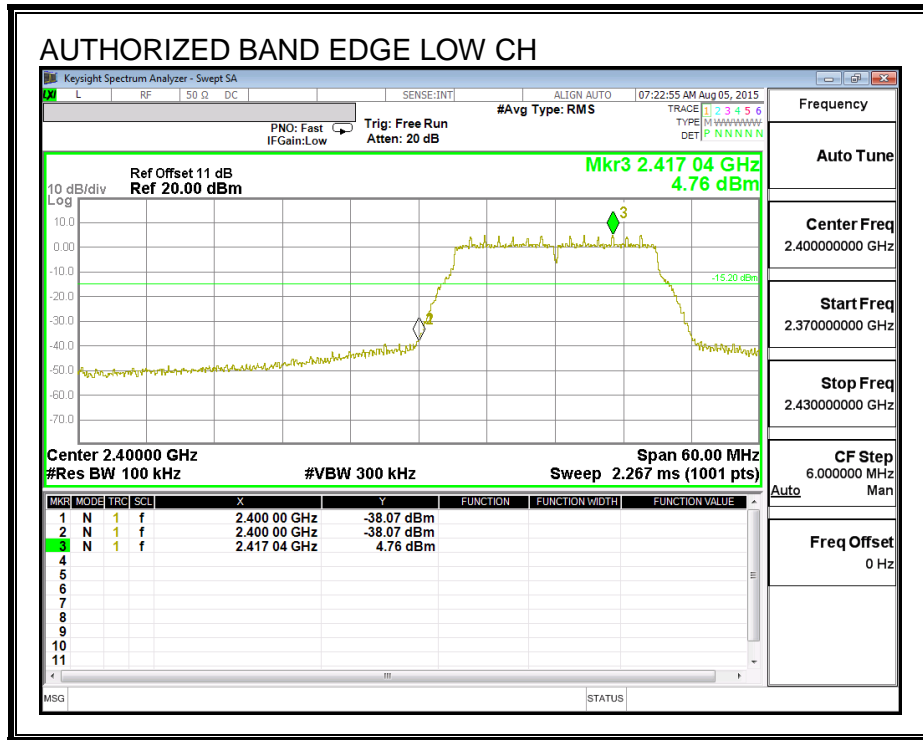


**MID CHANNEL BANDEDGE**

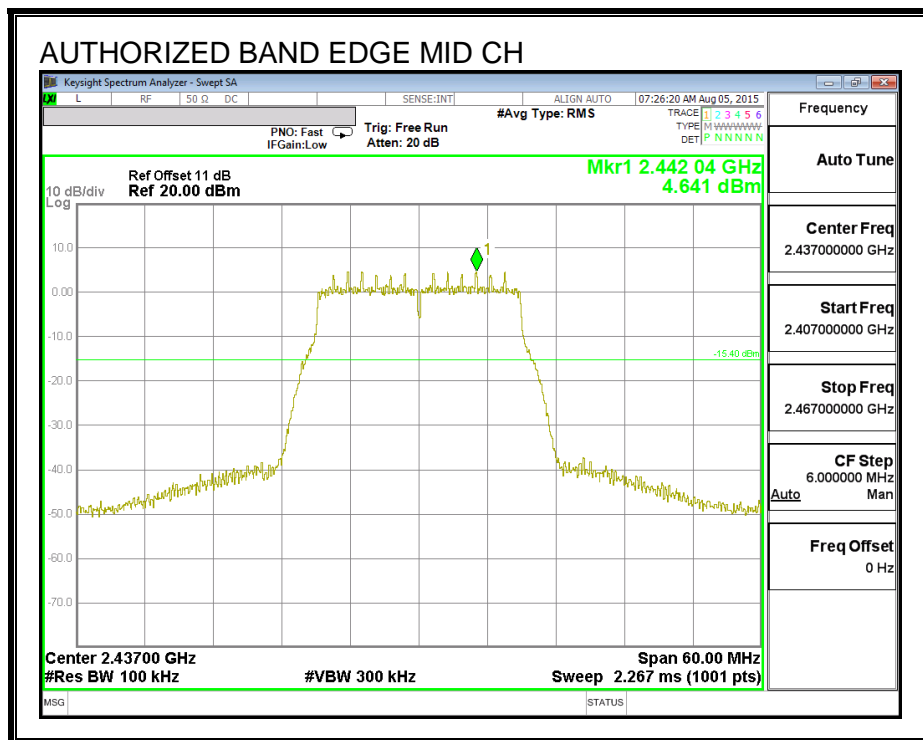



**HIGH CHANNEL BANDEDGE**


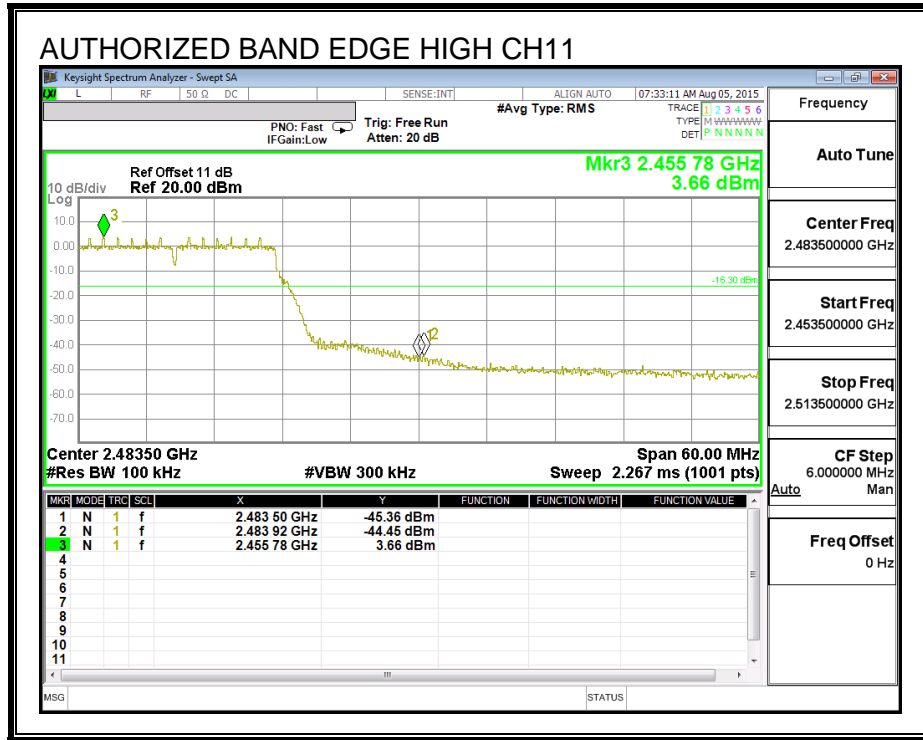


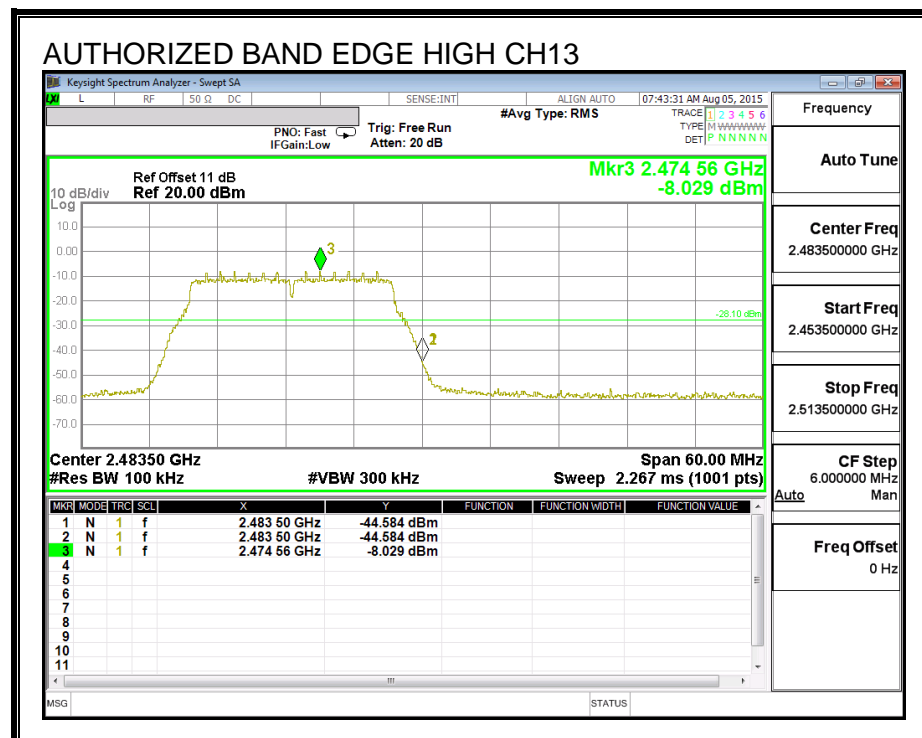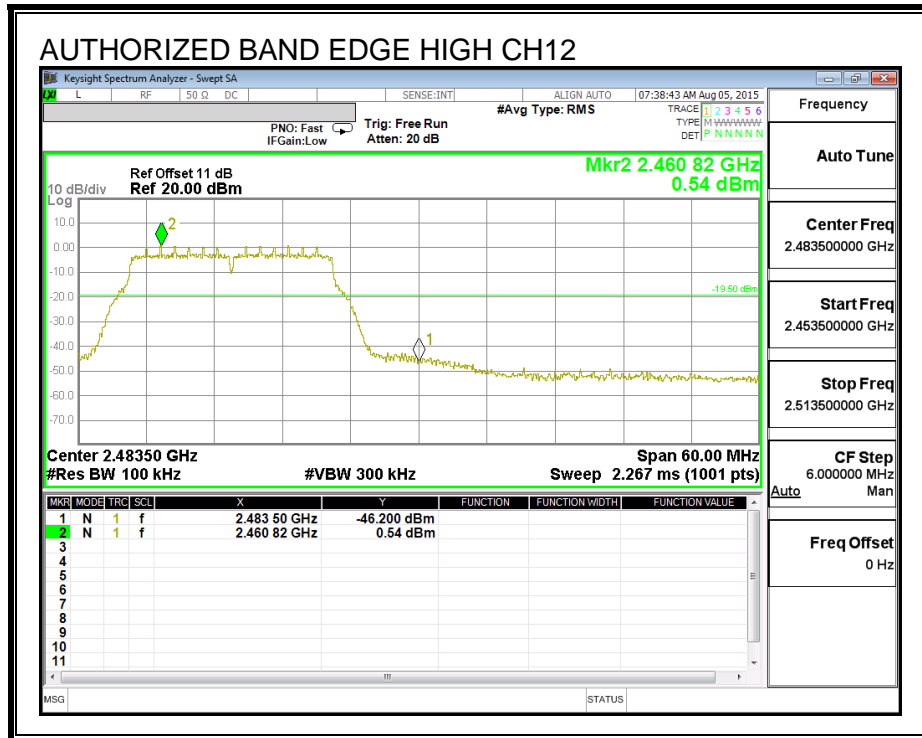




**OUT-OF-BAND EMISSIONS**

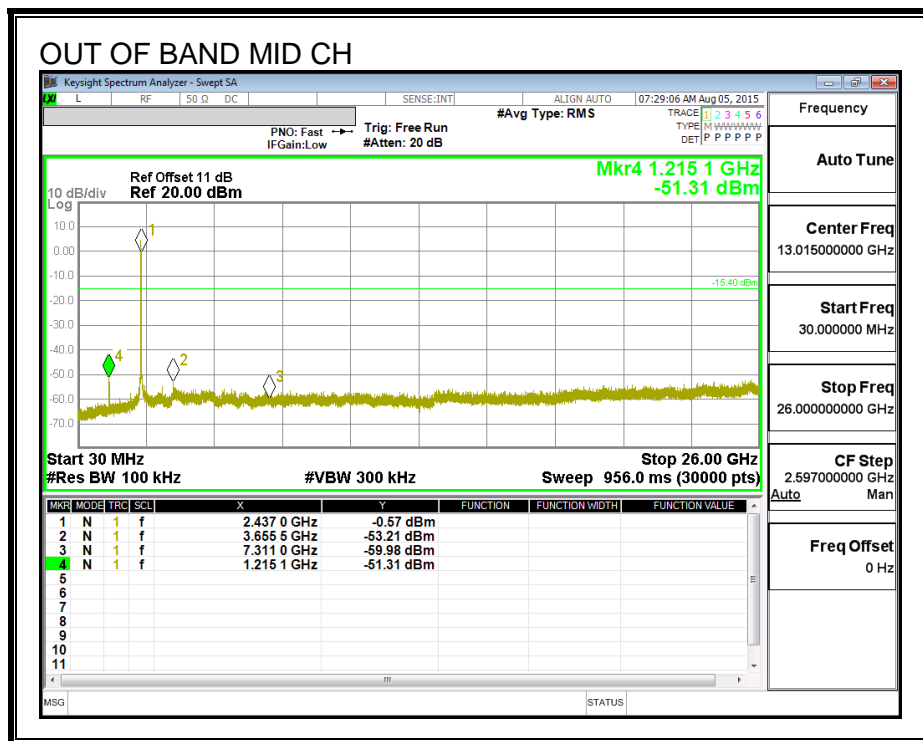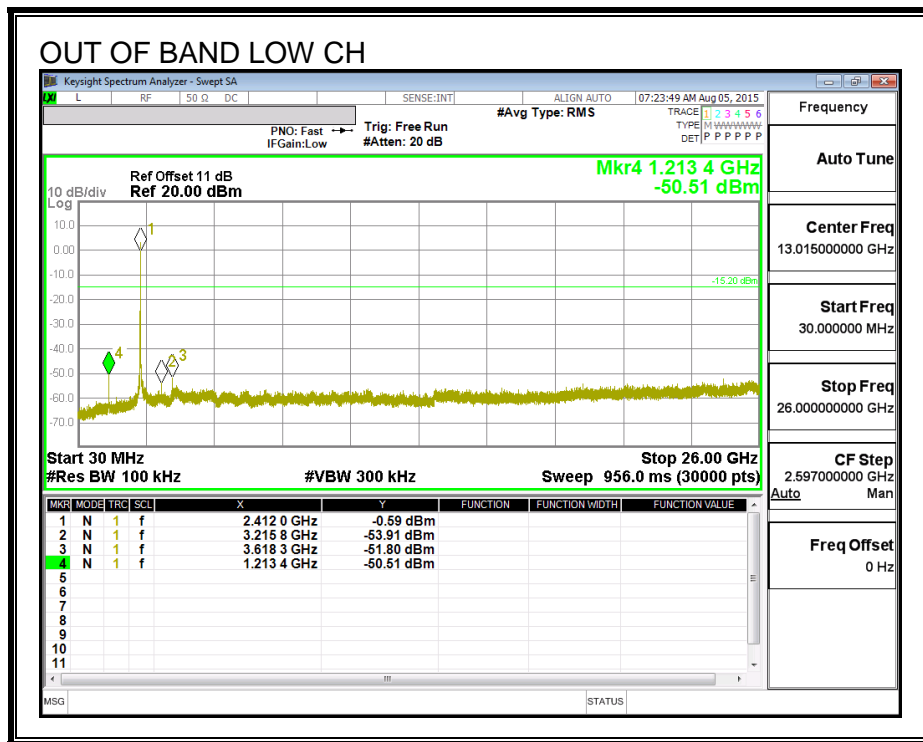

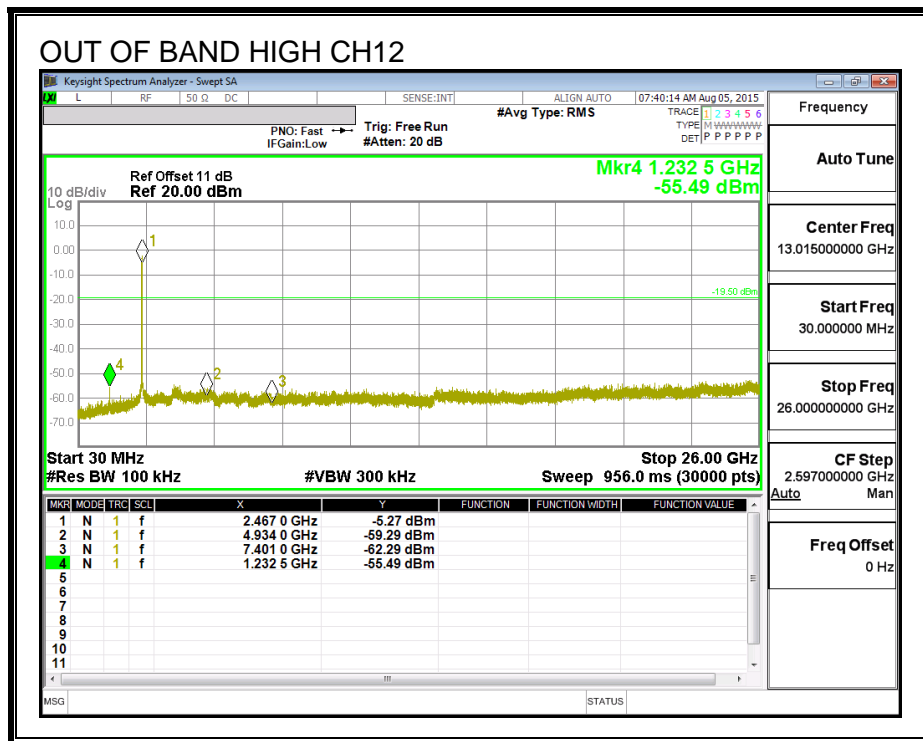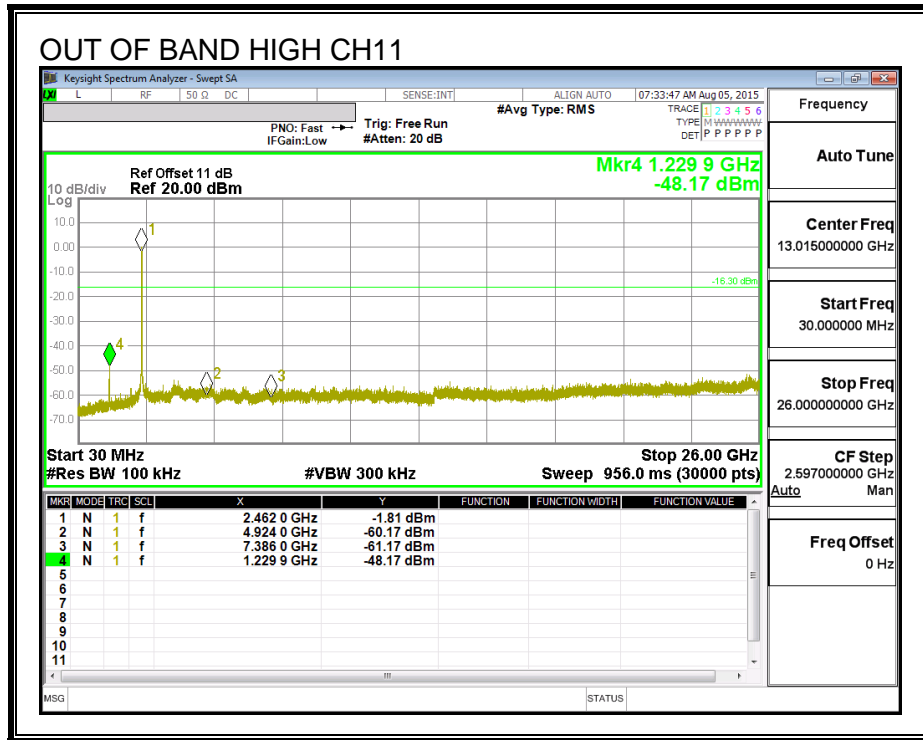

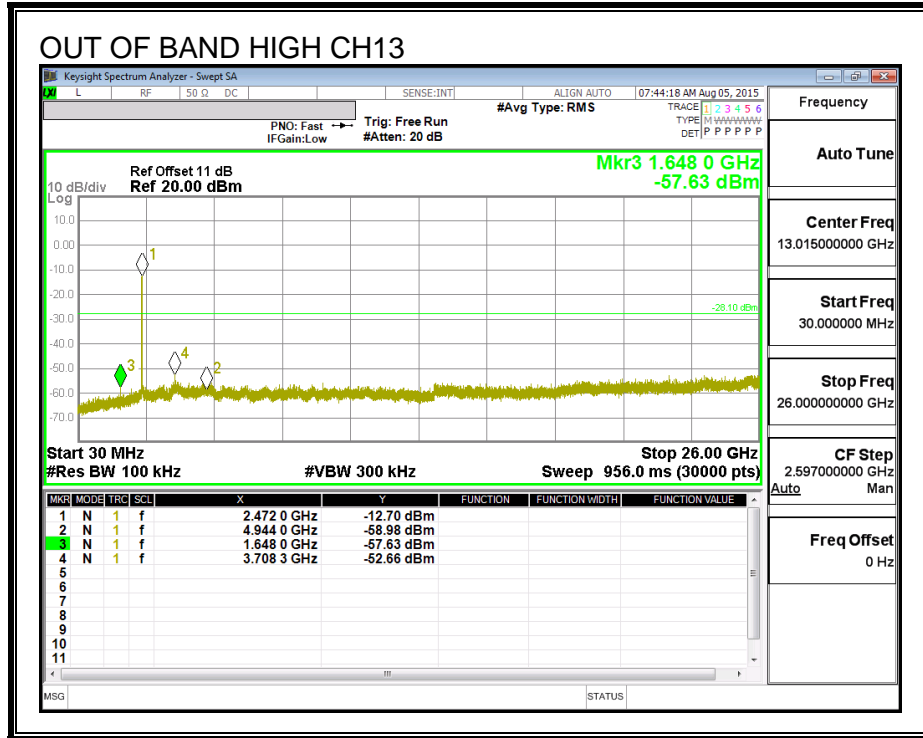

## 8.6. 802.11n HT20 2TX CDD MODE IN THE 2.4 GHZ BAND

### 8.6.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



#### RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low_1	2412	17.61	17.67	0.5
Low_2	2417	17.64	17.61	0.5
Mid	2437	17.67	17.67	0.5
High_10	2457	17.60	17.60	0.5
High_11	2462	17.61	17.64	0.5
High_12	2467	17.64	17.67	0.5
High_13	2472	17.67	17.67	0.5

**6 dB BANDWIDTH, Chain 0**

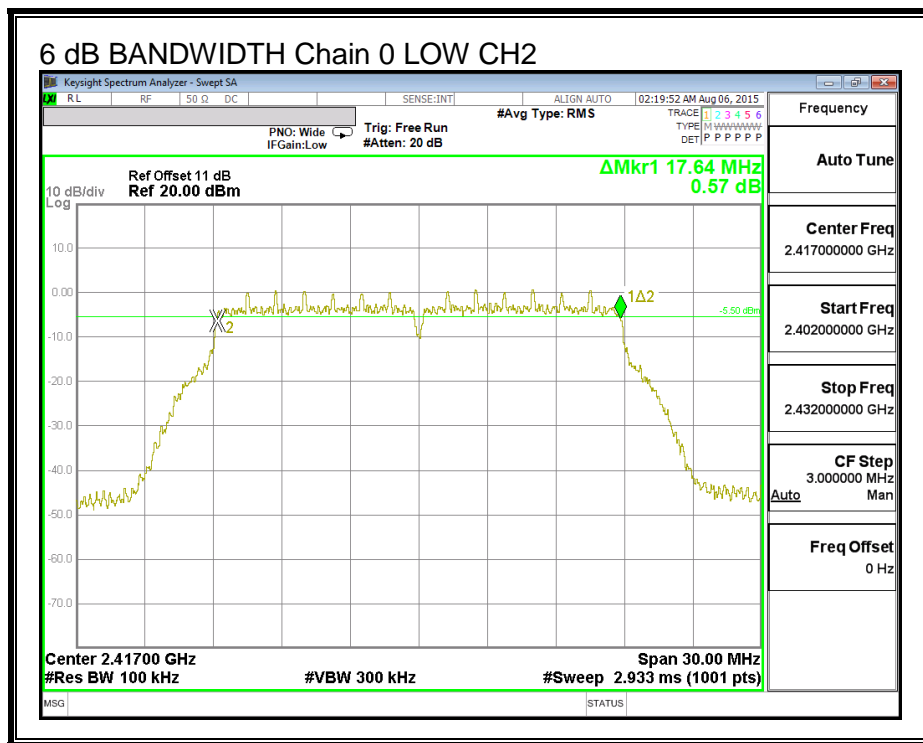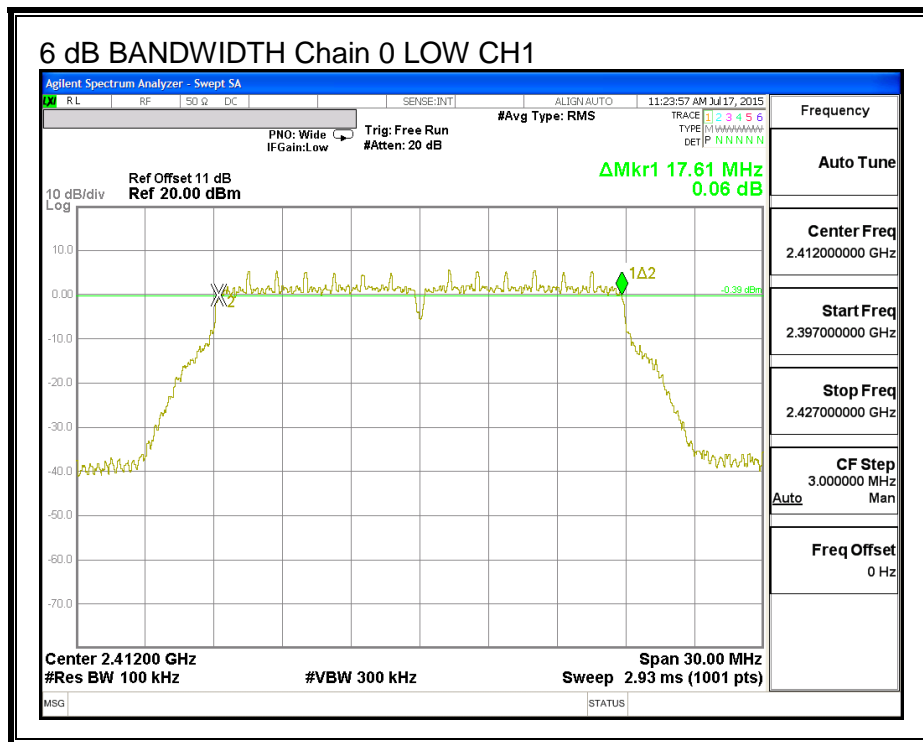

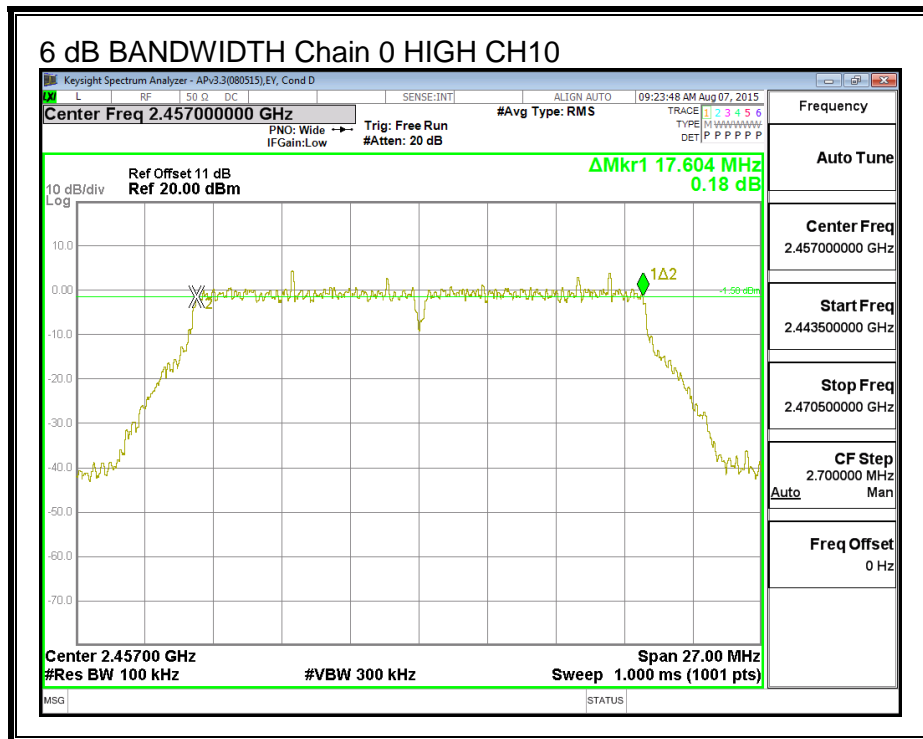
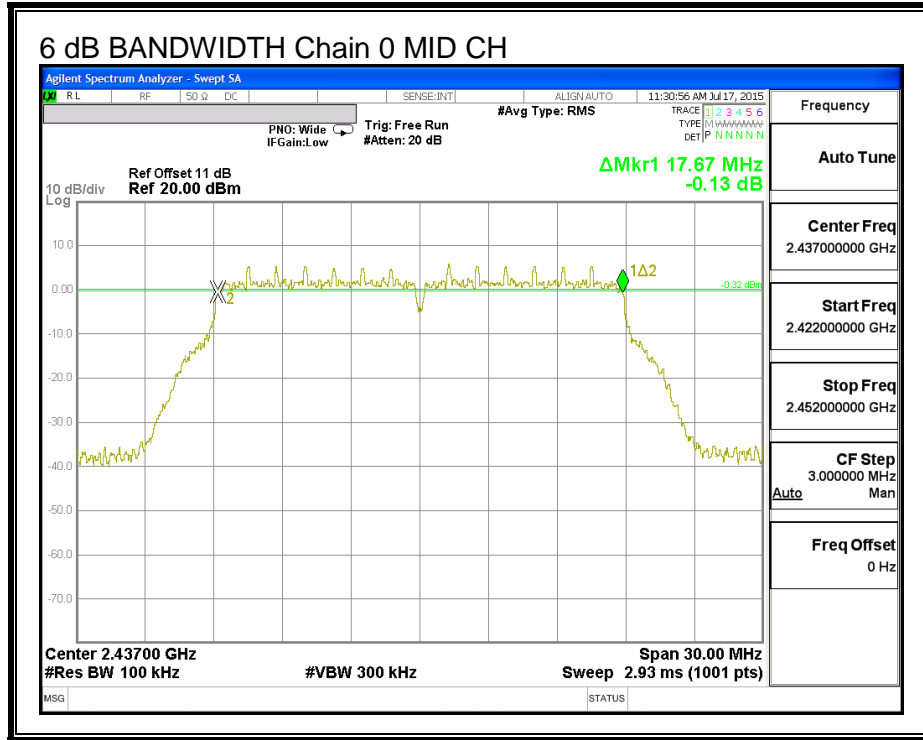


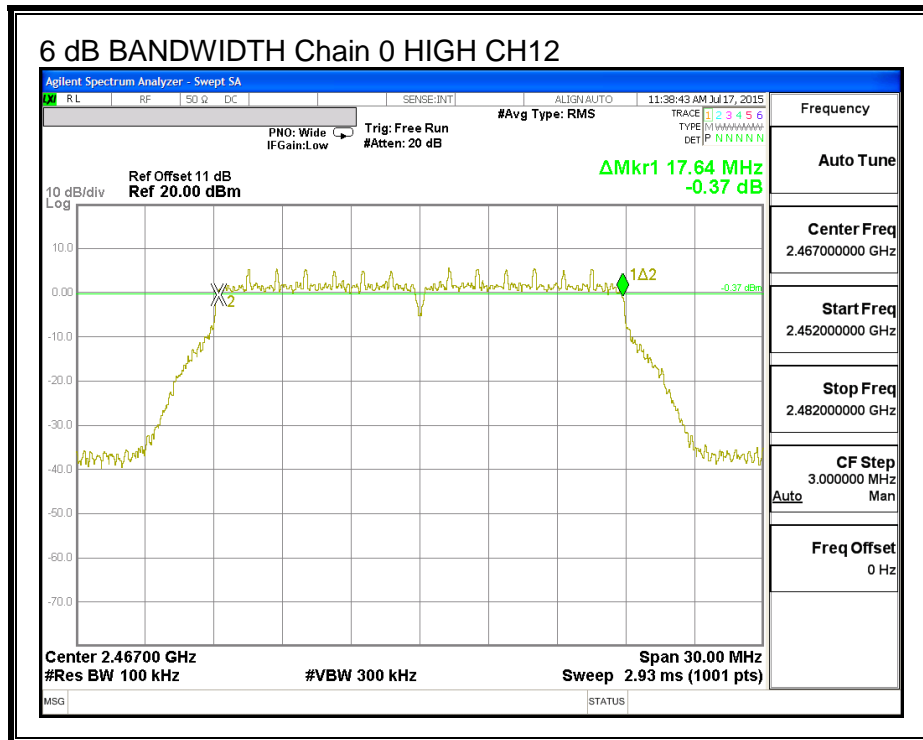
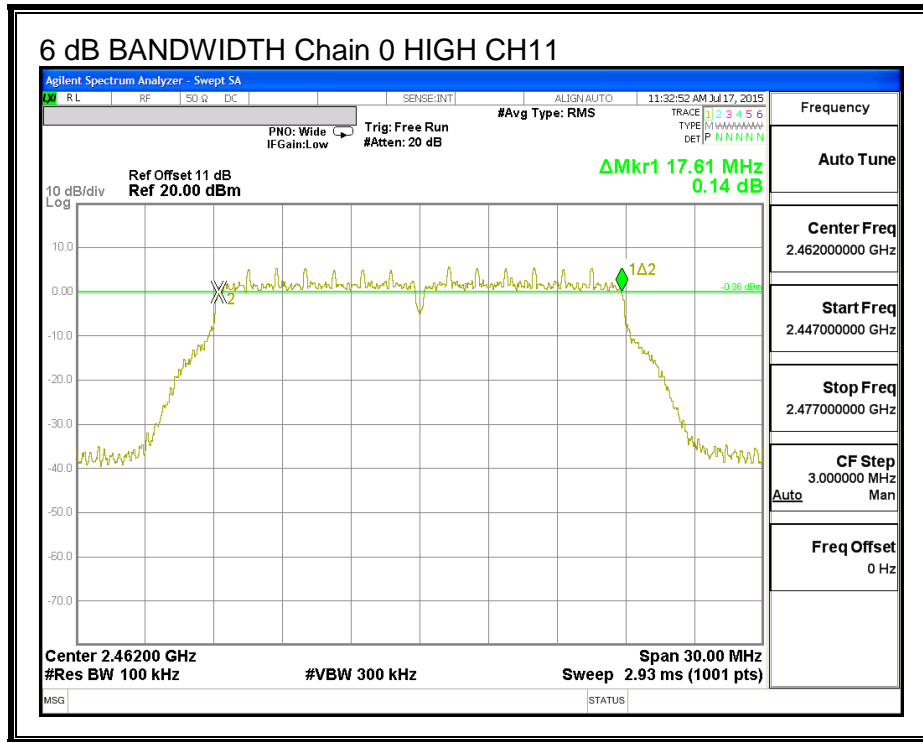









**6 dB BANDWIDTH, Chain 1**

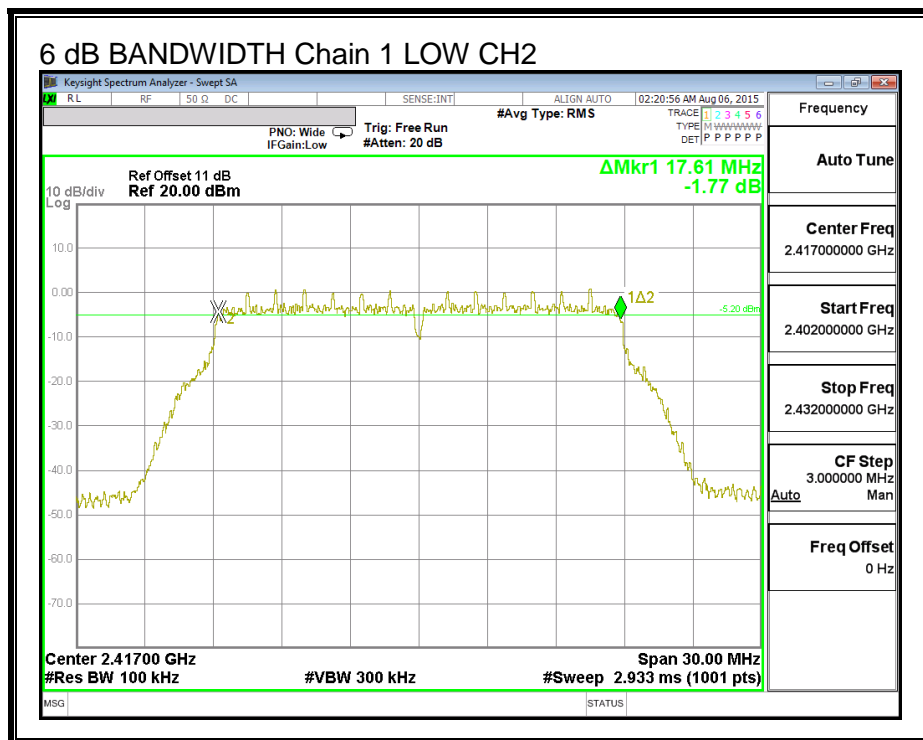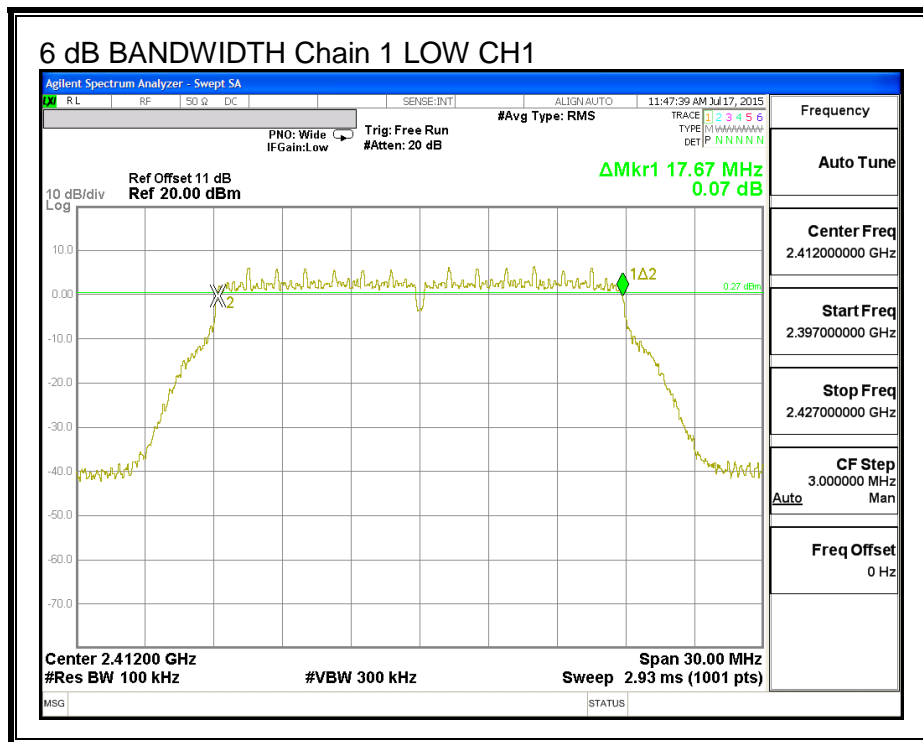

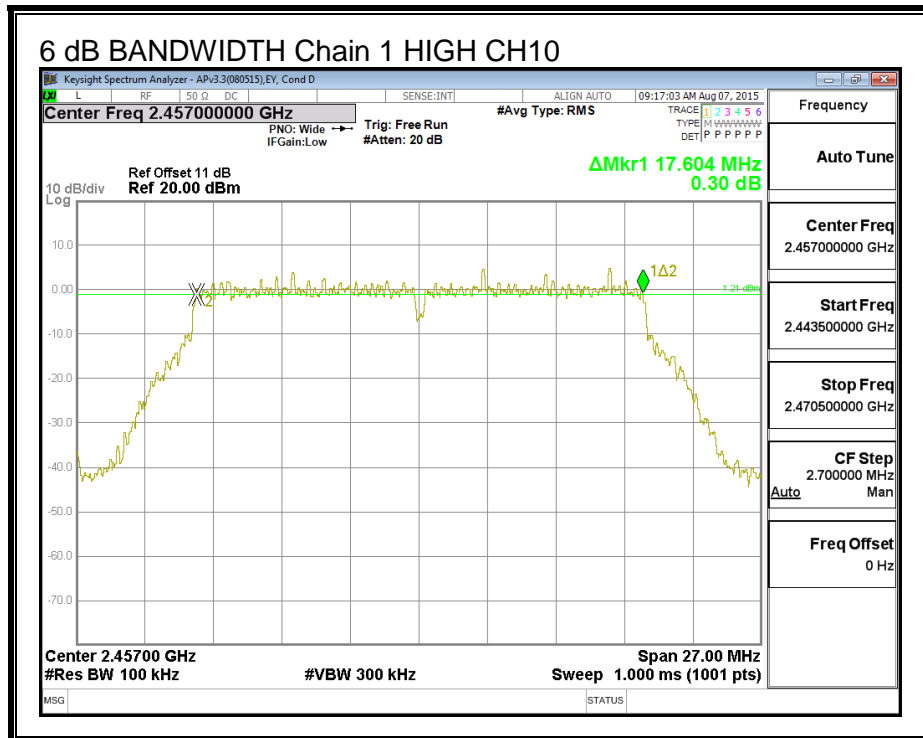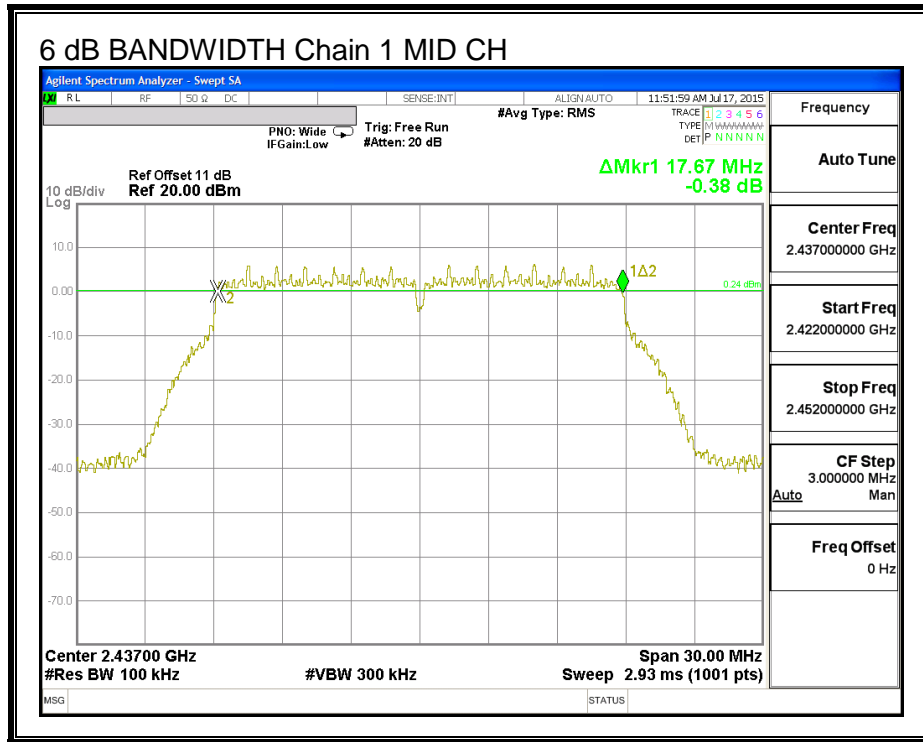

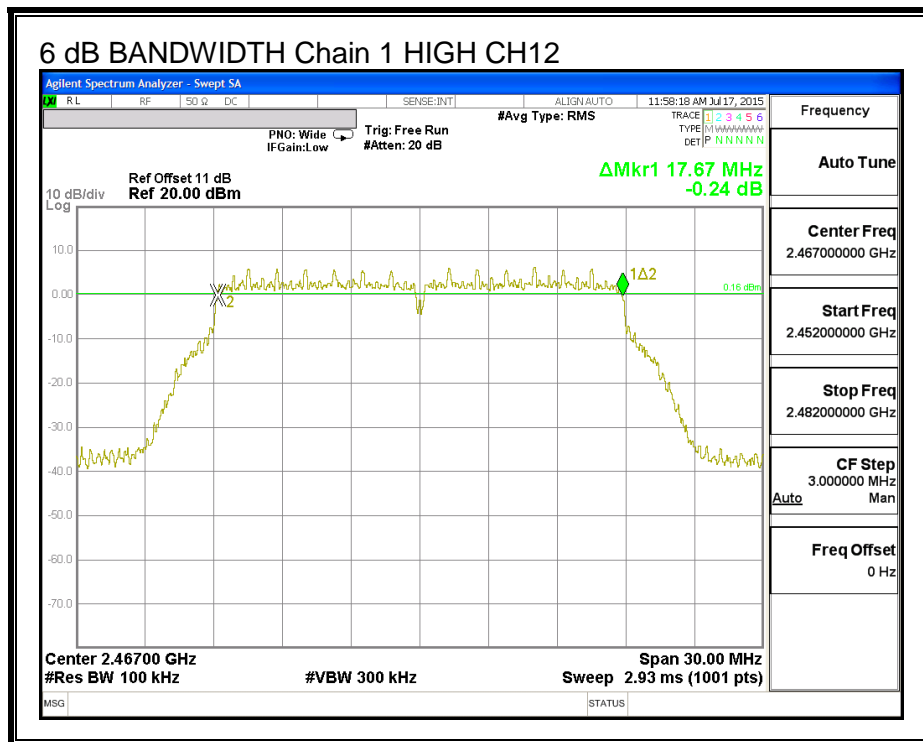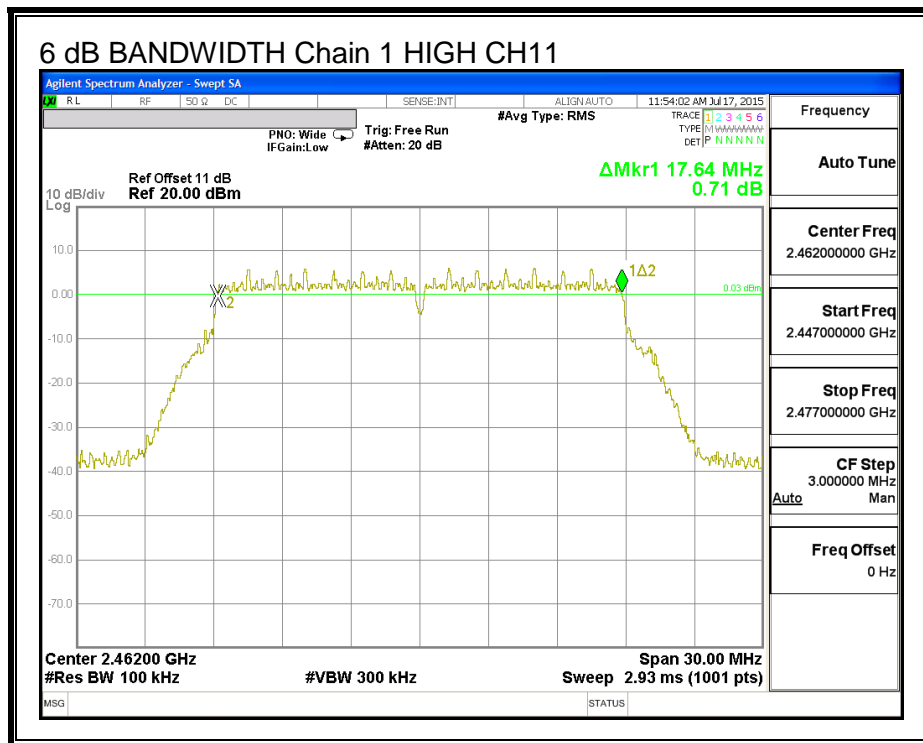

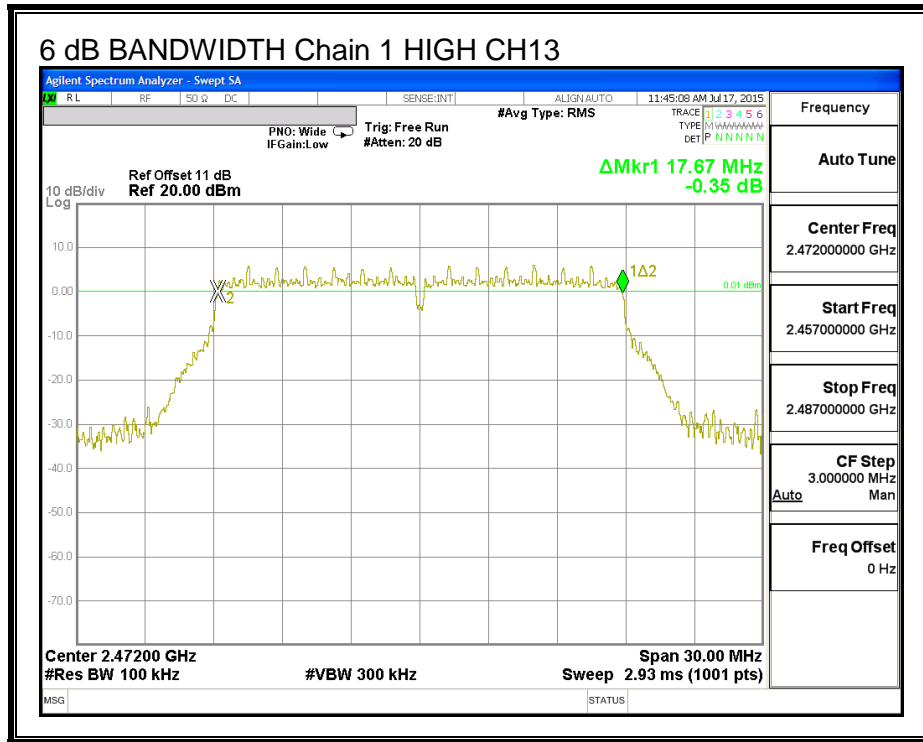

### 8.6.2. 99% BANDWIDTH



#### LIMITS



None; for reporting purposes only.



#### RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low_1	2412	17.723	17.679
Low_2	2417	17.722	17.708
Mid	2437	17.793	17.705
High_11	2457	17.711	17.723
High_11	2462	17.747	17.726
High_12	2467	17.759	17.721
High_13	2472	17.744	17.772


**99% BANDWIDTH, Chain 0**

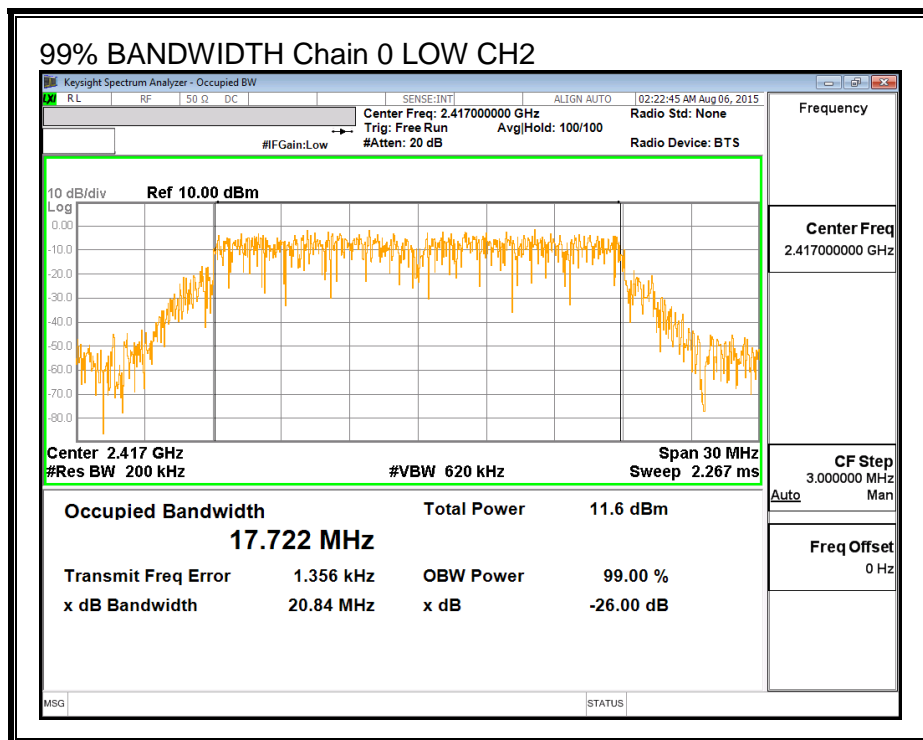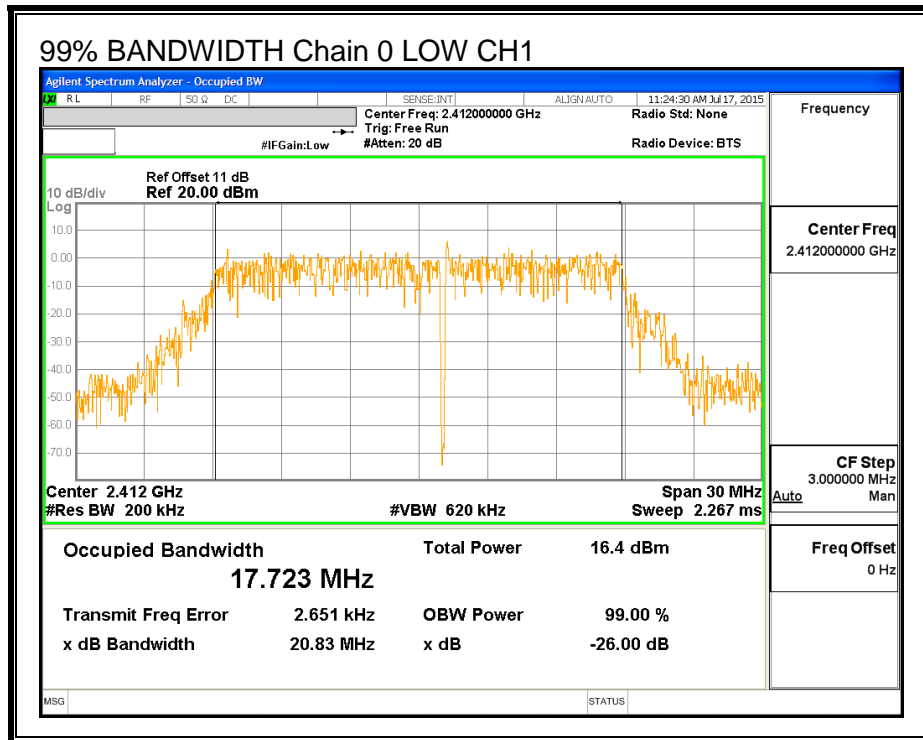

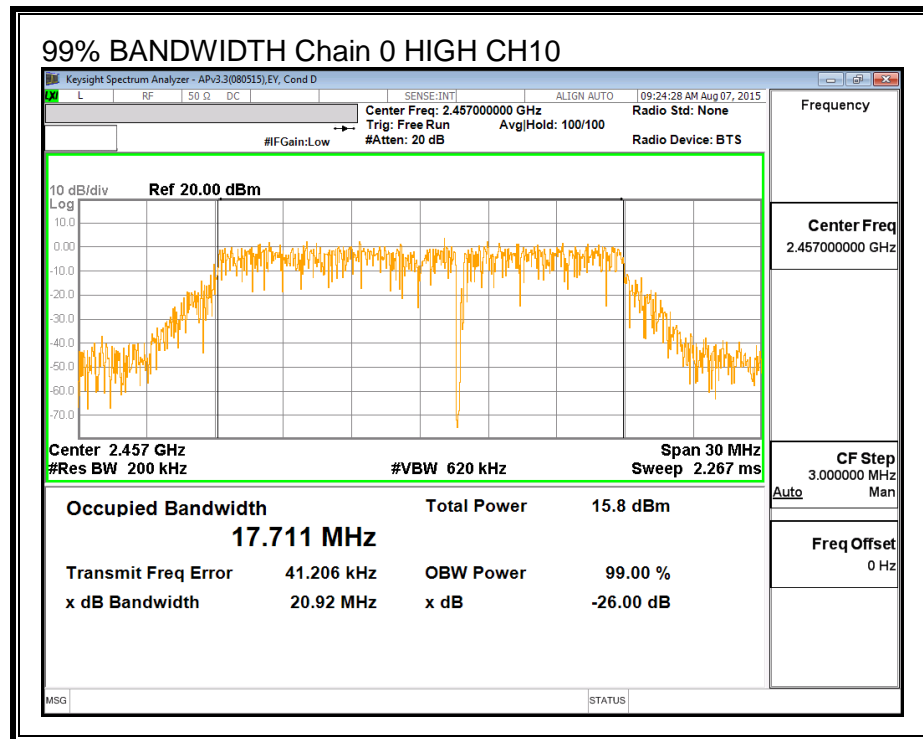
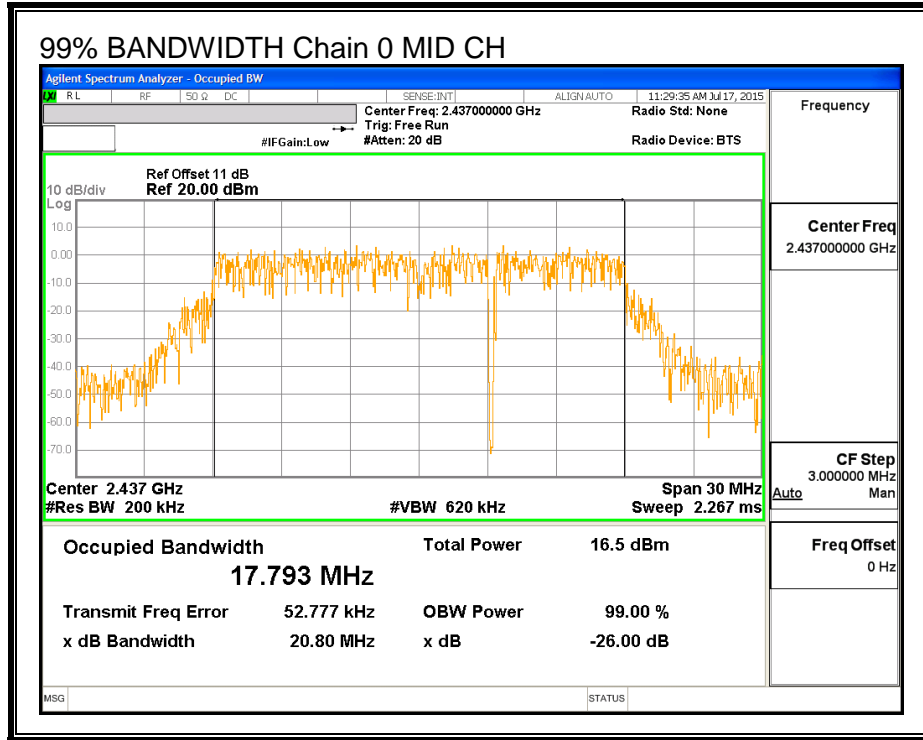


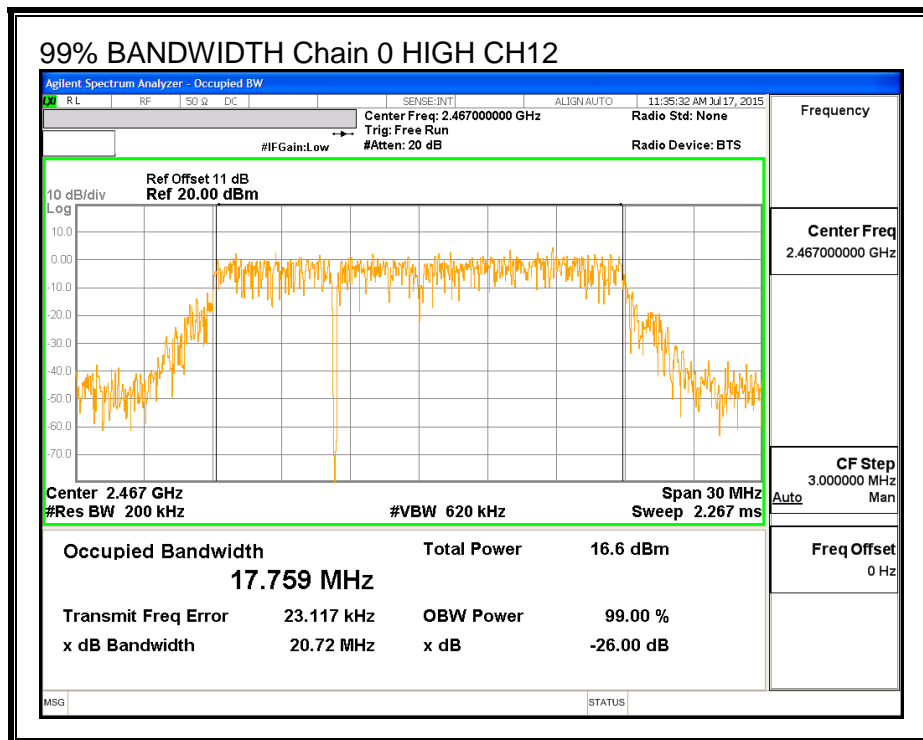
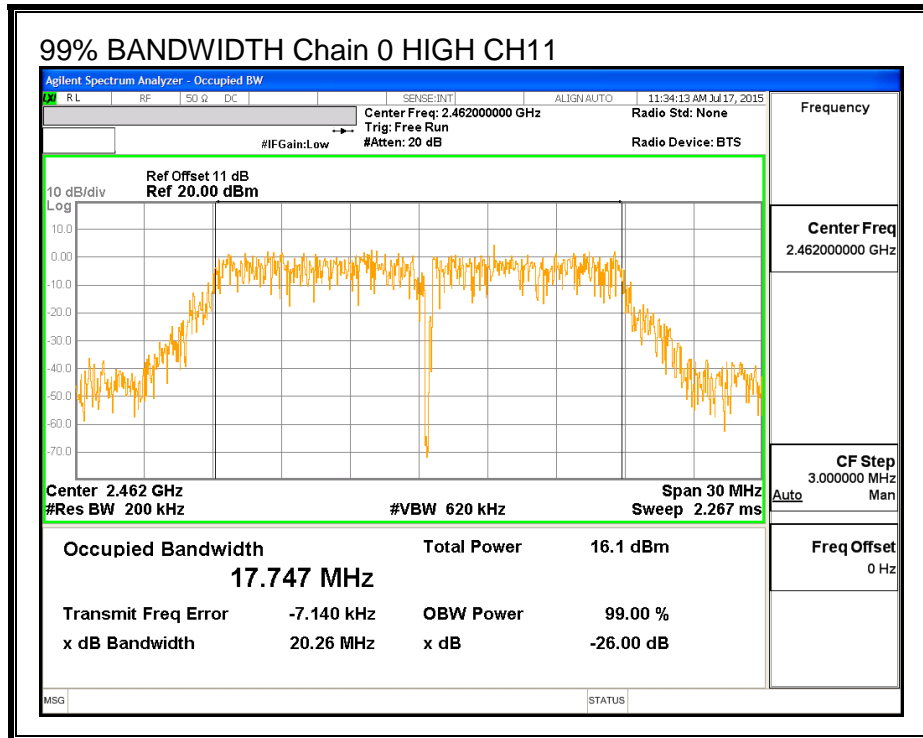






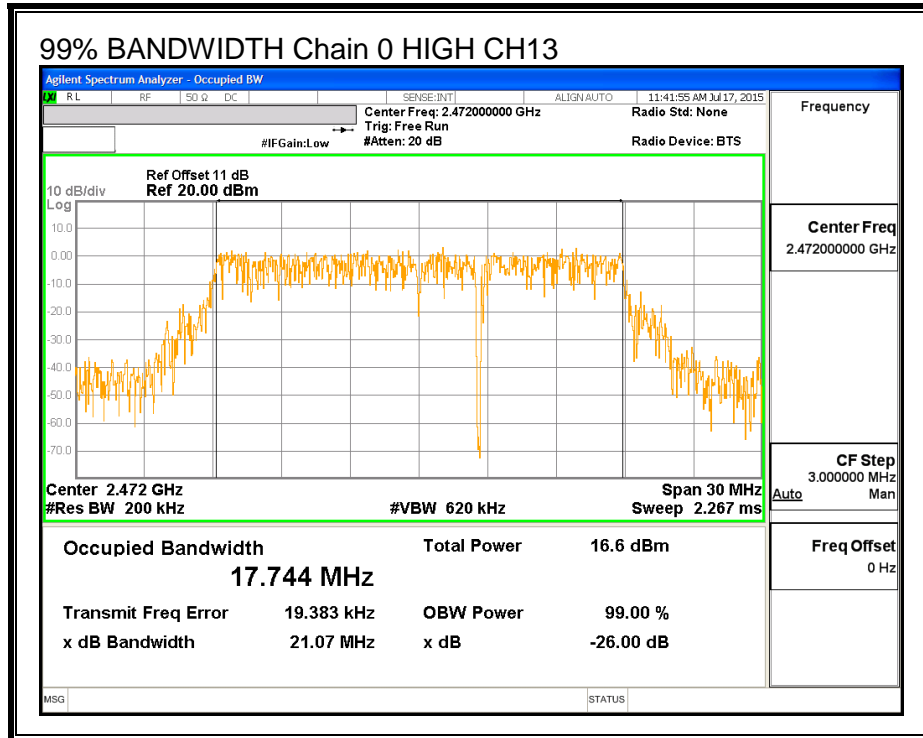


**99% BANDWIDTH, Chain 1**

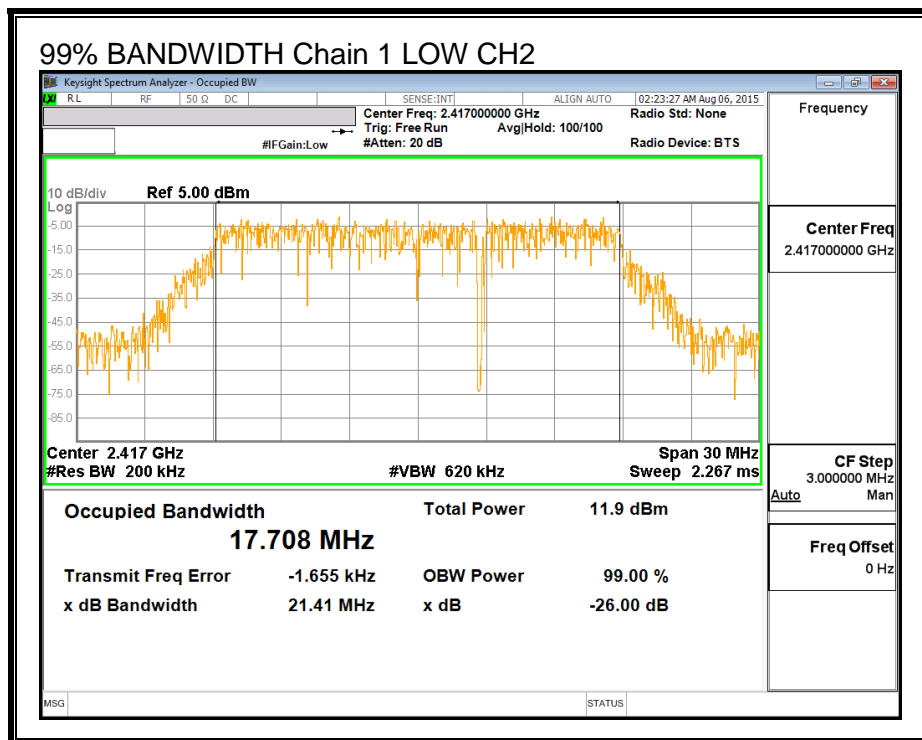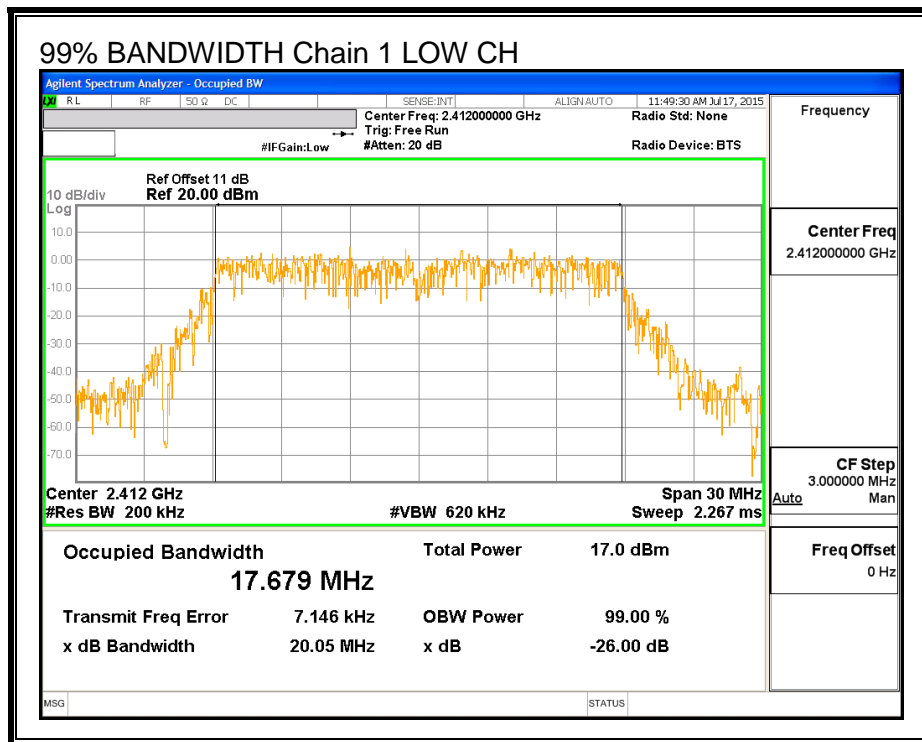

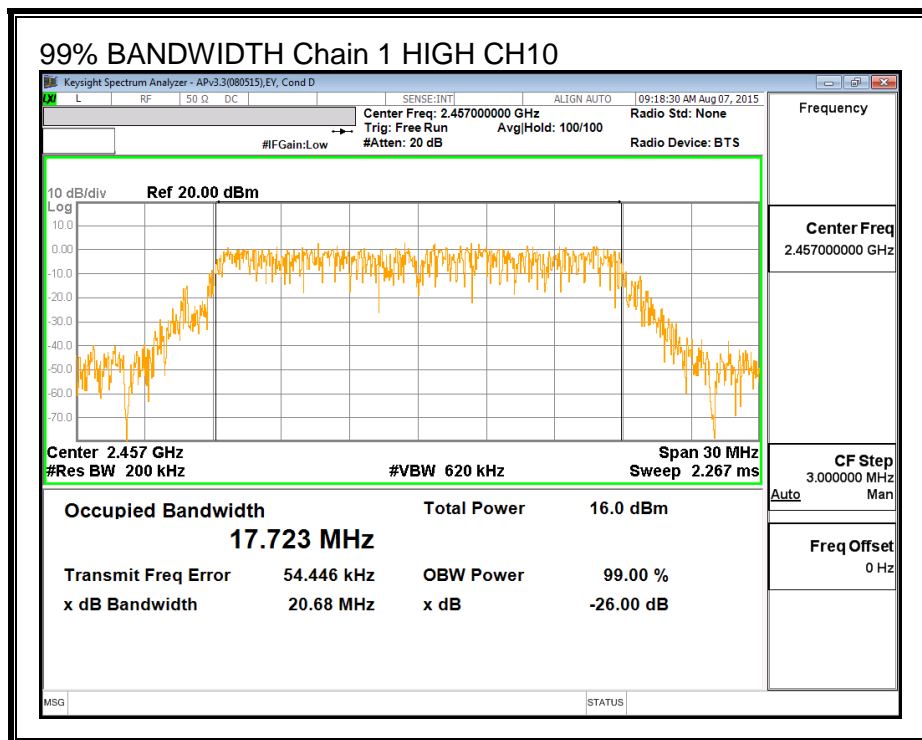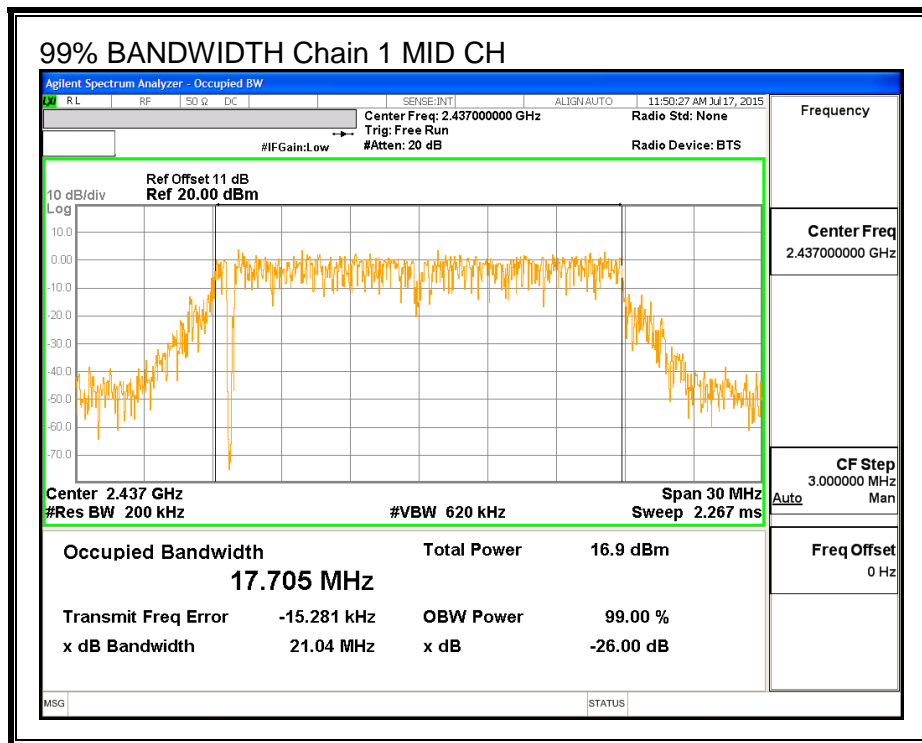

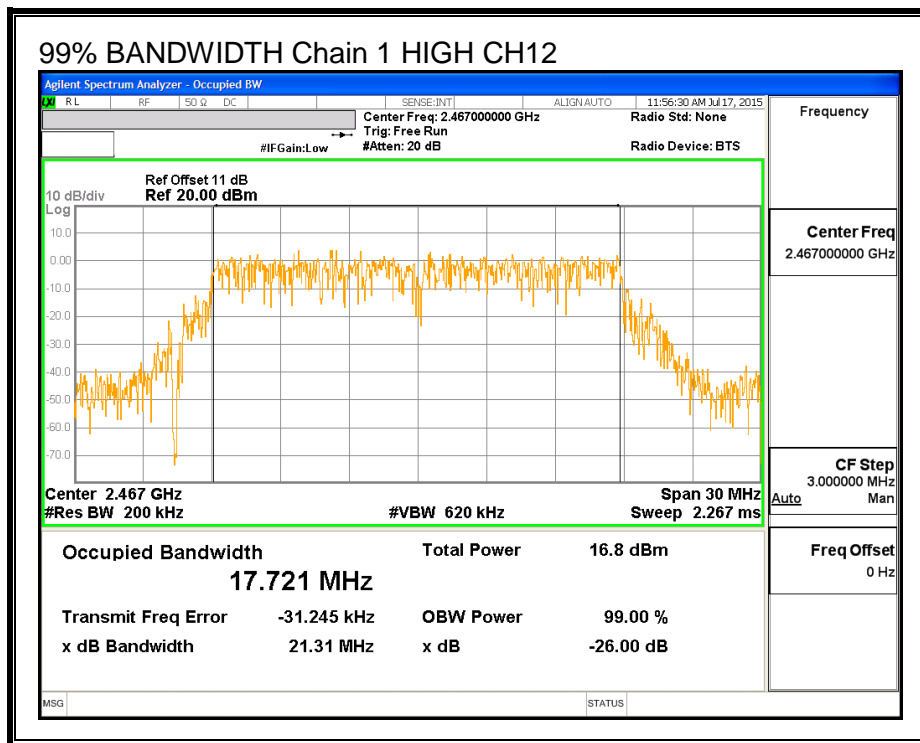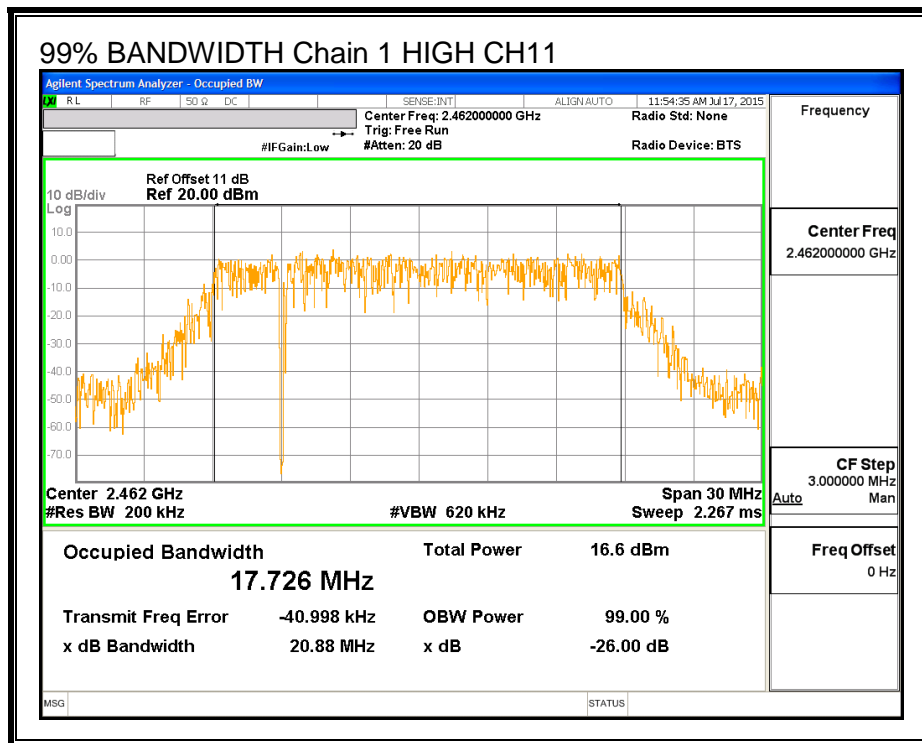

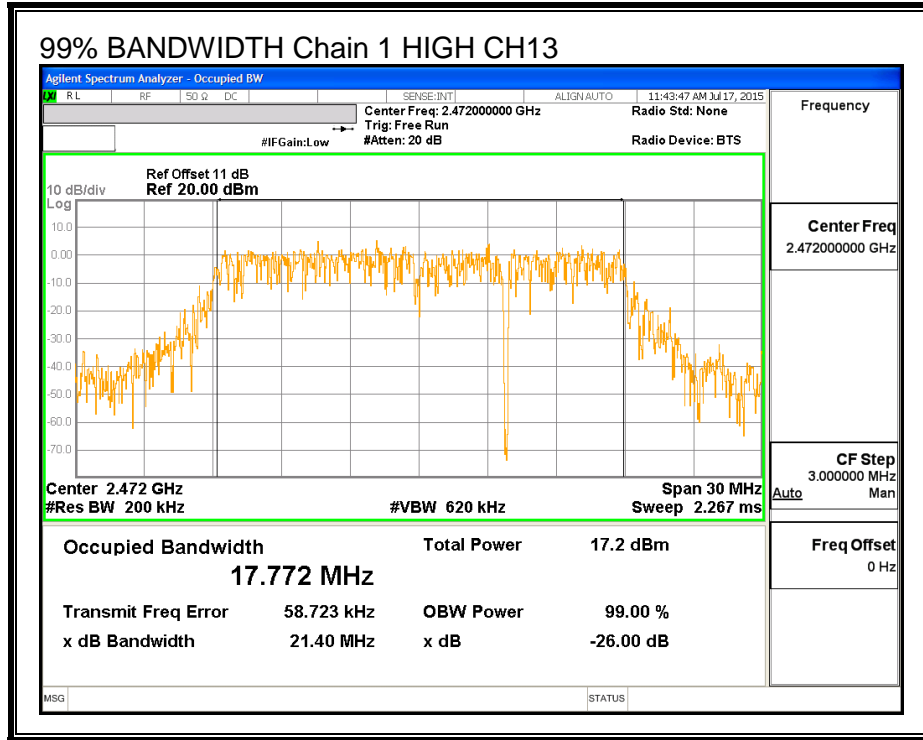

### 8.6.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low_1	2412	13.83	13.90	16.88
Low_2	2417	15.94	15.92	18.94
Mid	2437	15.99	15.91	18.96
High_10	2457	15.83	15.92	18.89
High_11	2462	13.87	13.91	16.90
High_12	2467	9.87	9.93	12.91
High_13	2472	2.49	2.45	5.48

### 8.6.4. OUTPUT POWER

#### LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
-0.60	-0.50	-0.55

**RESULTS**

**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	-0.55	30.00	30	36	30.00
Low_2	2417	-0.55	30.00	30	36	30.00
Mid	2437	-0.55	30.00	30	36	30.00
High_11	2462	-0.55	30.00	30	36	30.00
High_12	2467	-0.55	30.00	30	36	30.00
High_13	2472	-0.55	30.00	30	36	30.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd Power</b>
---------------------------	------	---

**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margi (dB)
Low_1	2412	21.05	21.51	24.30	30.00	-5.70
Low_2	2417	23.16	23.11	26.15	30.00	-3.85
Mid	2437	23.23	23.18	26.22	30.00	-3.78
High_10	2457	23.12	23.18	26.16	30.00	-3.84
High_11	2462	21.11	21.15	24.14	30.00	-5.86
High_12	2467	17.13	17.27	20.21	30.00	-9.79
High_13	2472	9.76	9.68	12.73	30.00	-17.27



### 8.6.5. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



#### RESULTS



<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



#### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Chain 1 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-11.97	-11.76	-8.85	8.0	-16.9
Low_2	2417	-9.35	-9.75	-6.54	8.0	-14.5
Mid	2437	-9.37	-9.34	-6.34	8.0	-14.3
High_10	2457	-9.56	-9.47	-6.50	8.0	-14.5
High_11	2462	-10.84	-10.74	-7.78	8.0	-15.8
High_12	2467	-15.99	-15.54	-12.75	8.0	-20.7
High_13	2472	-23.08	-23.56	-20.30	8.0	-28.3

**PSD, Chain 0**

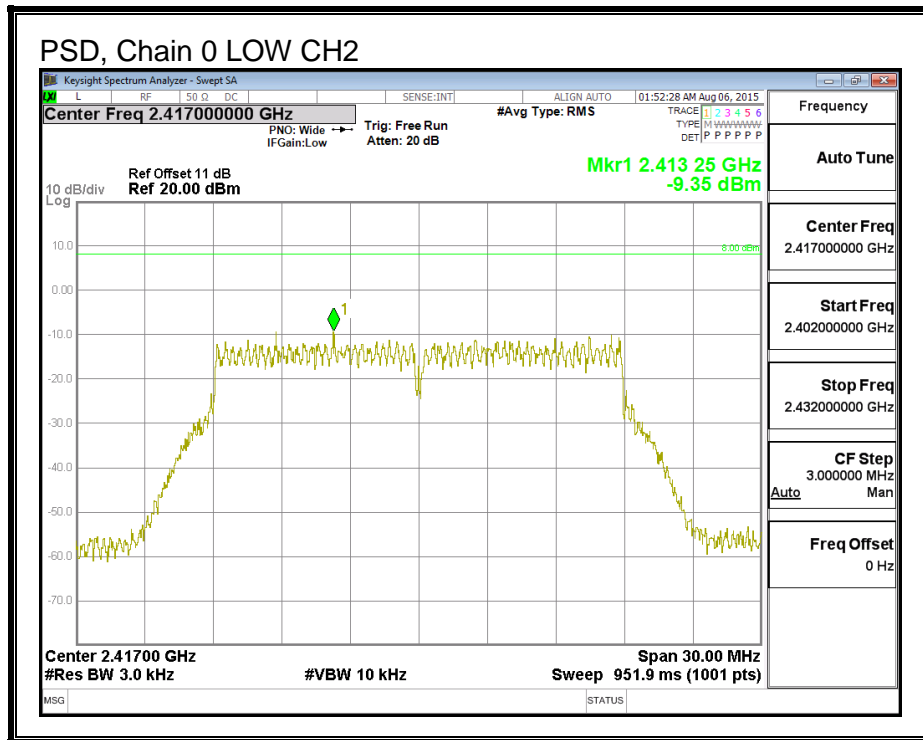
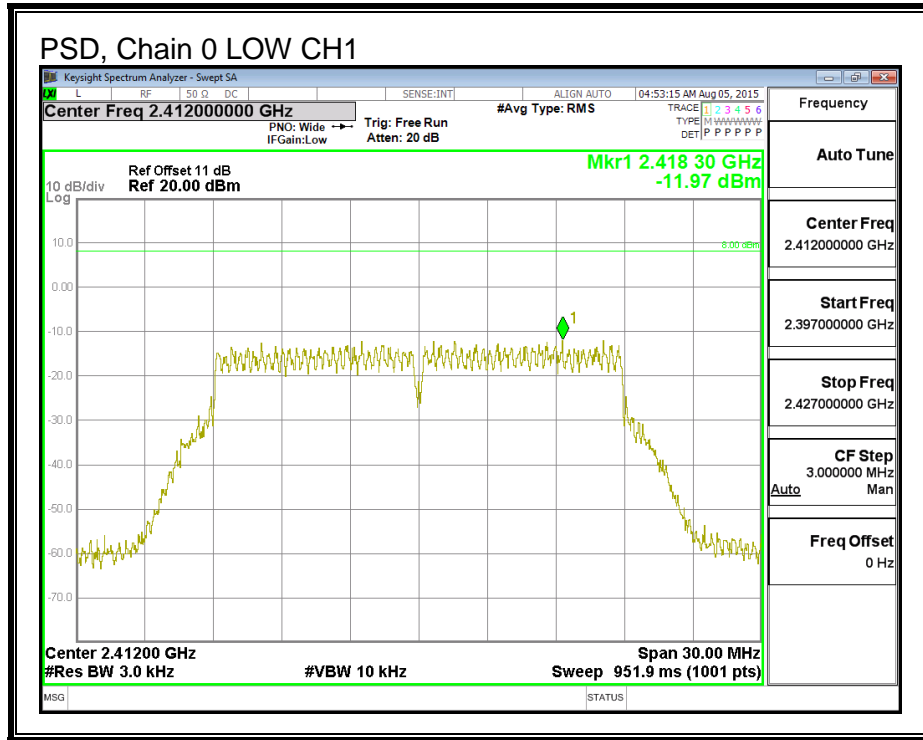


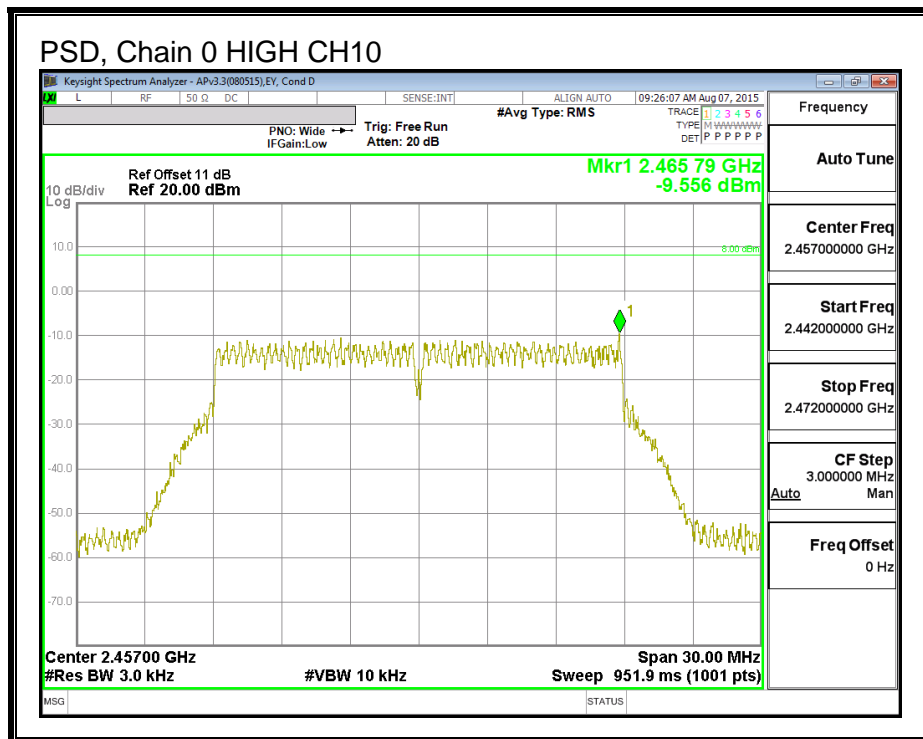
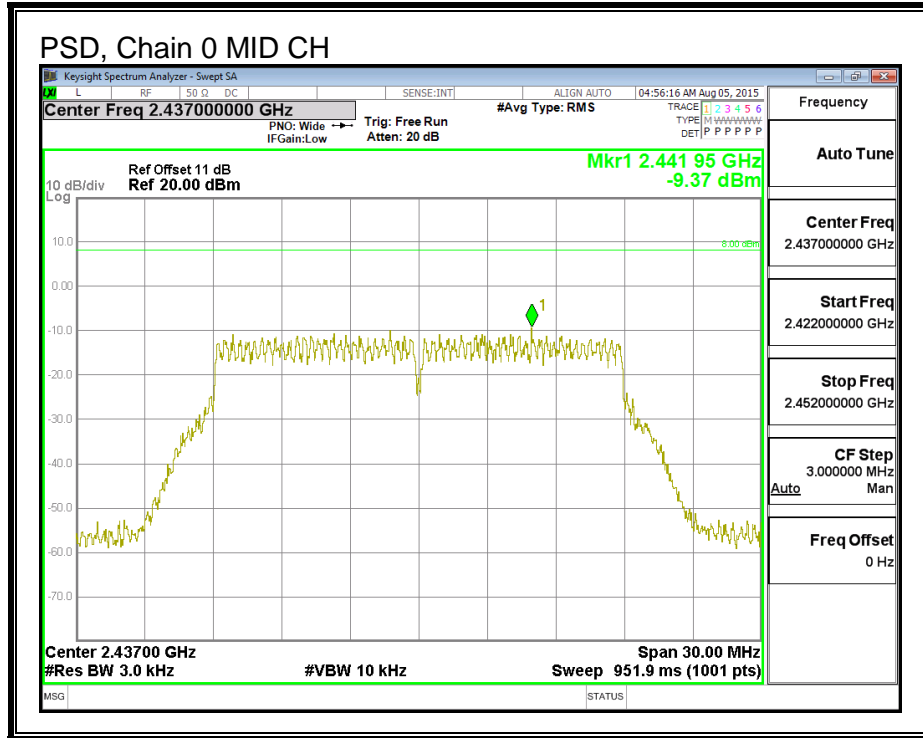


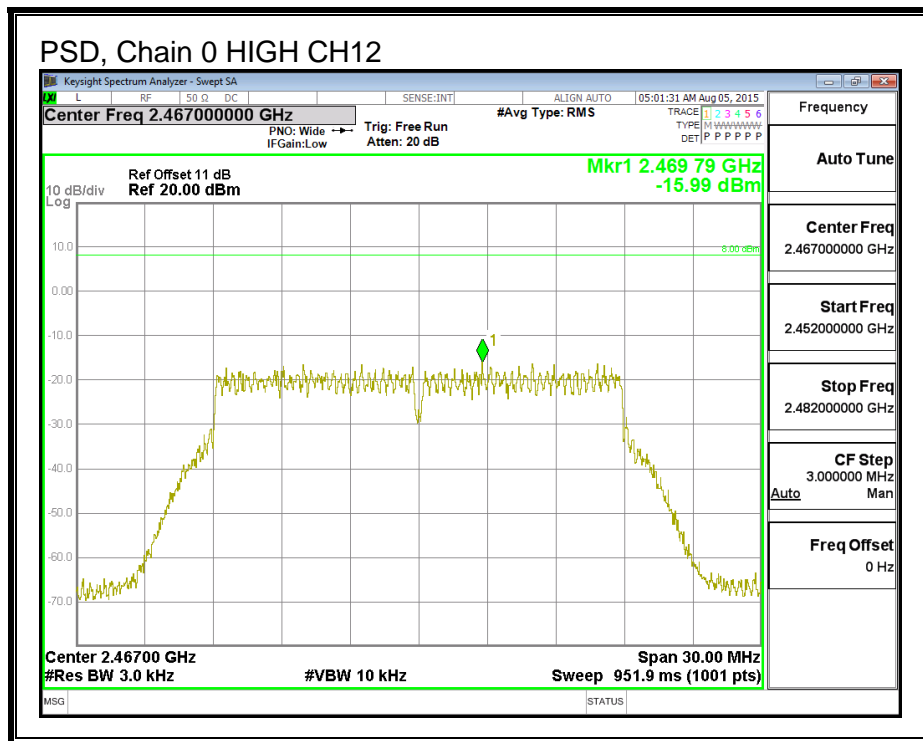
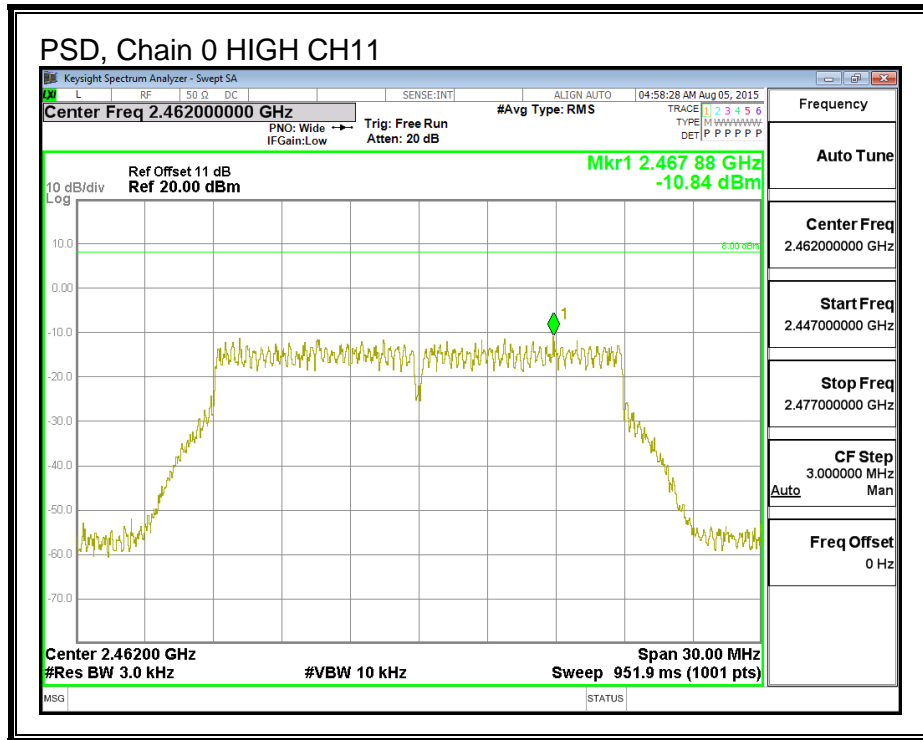





**PSD, Chain 1**

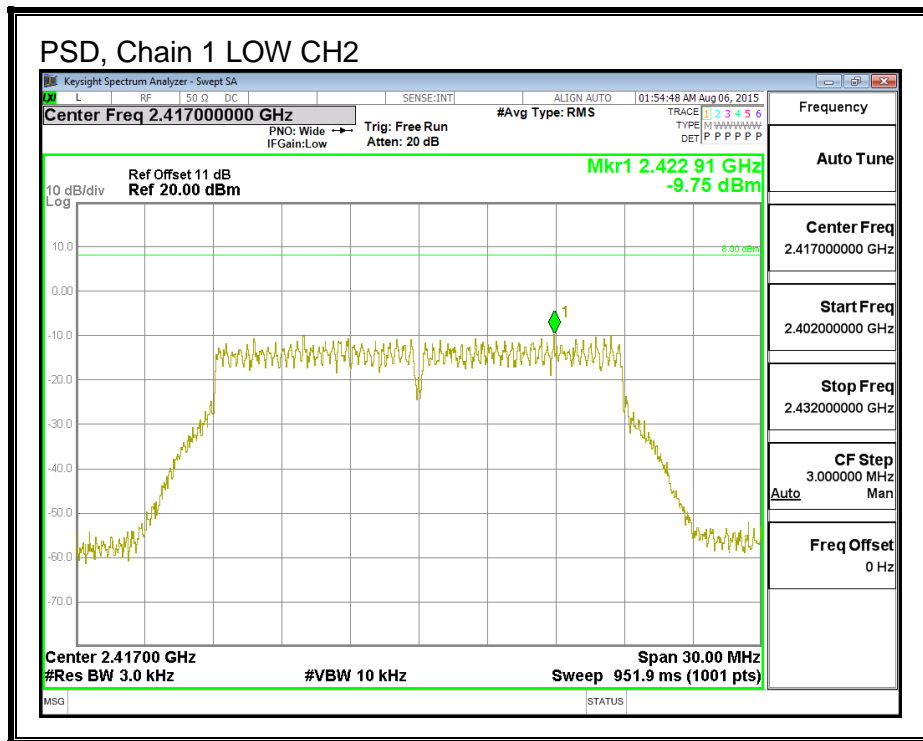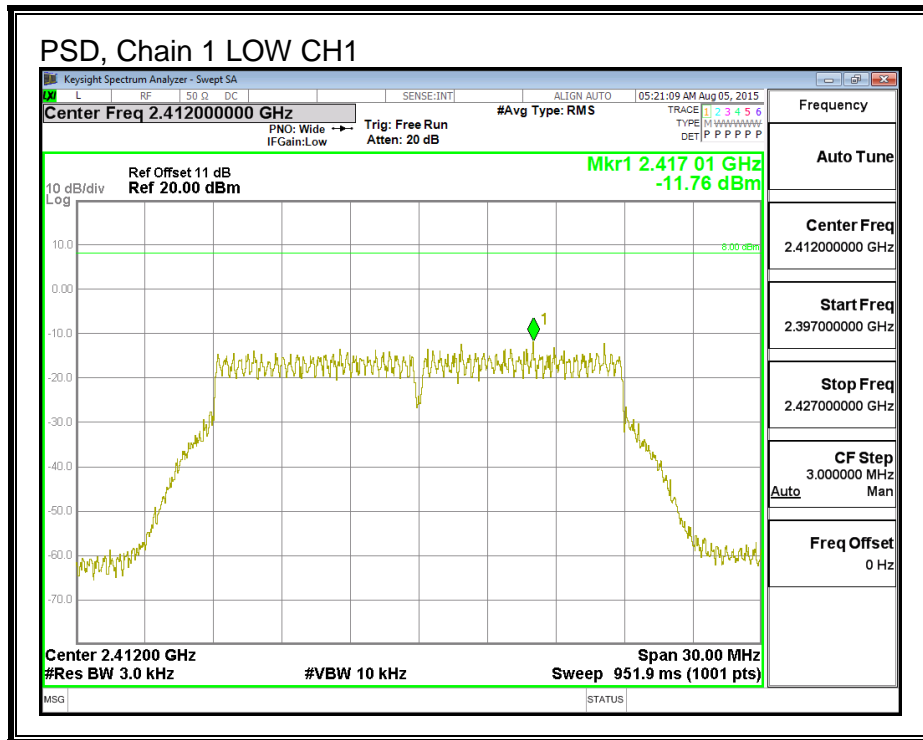

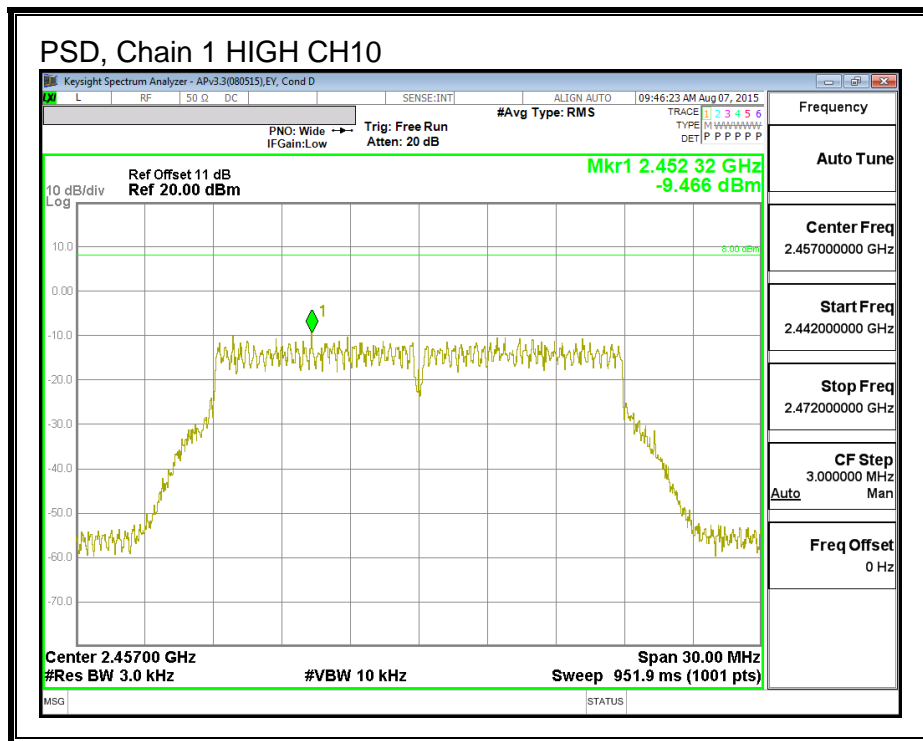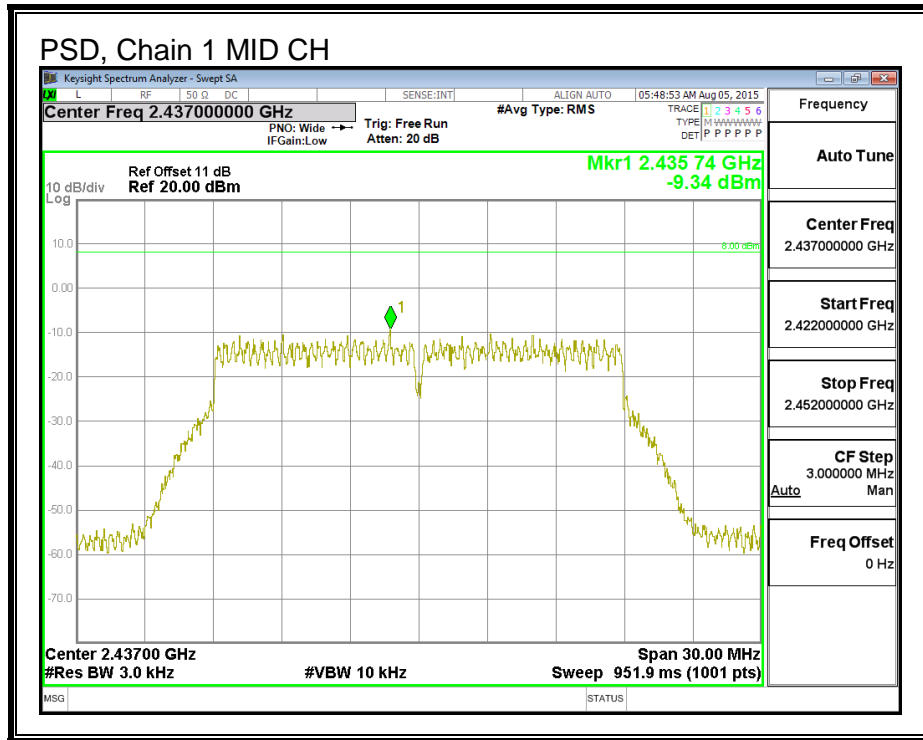

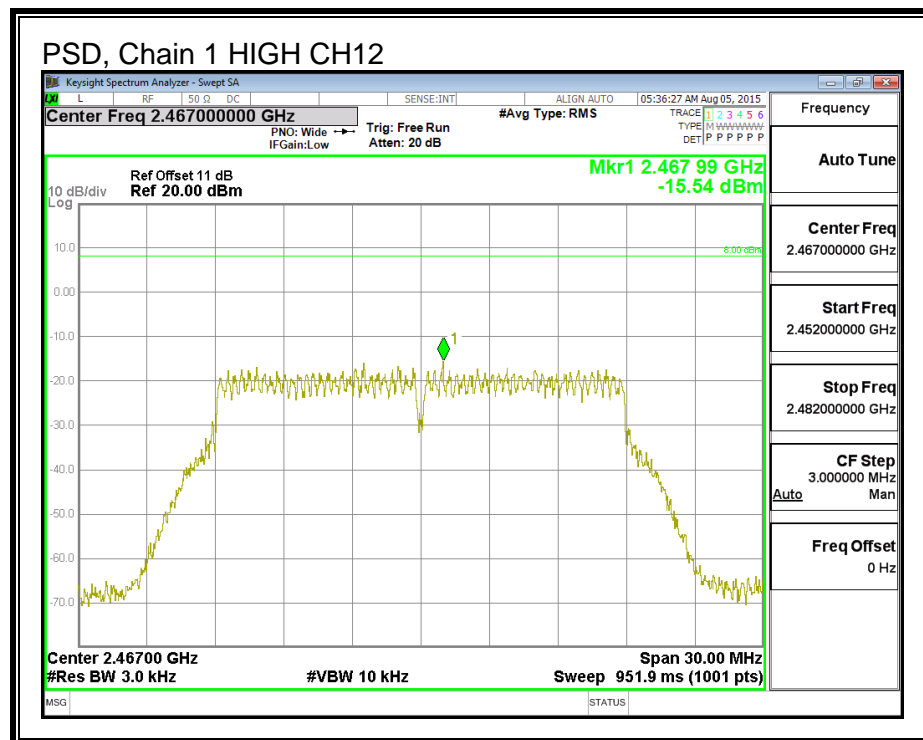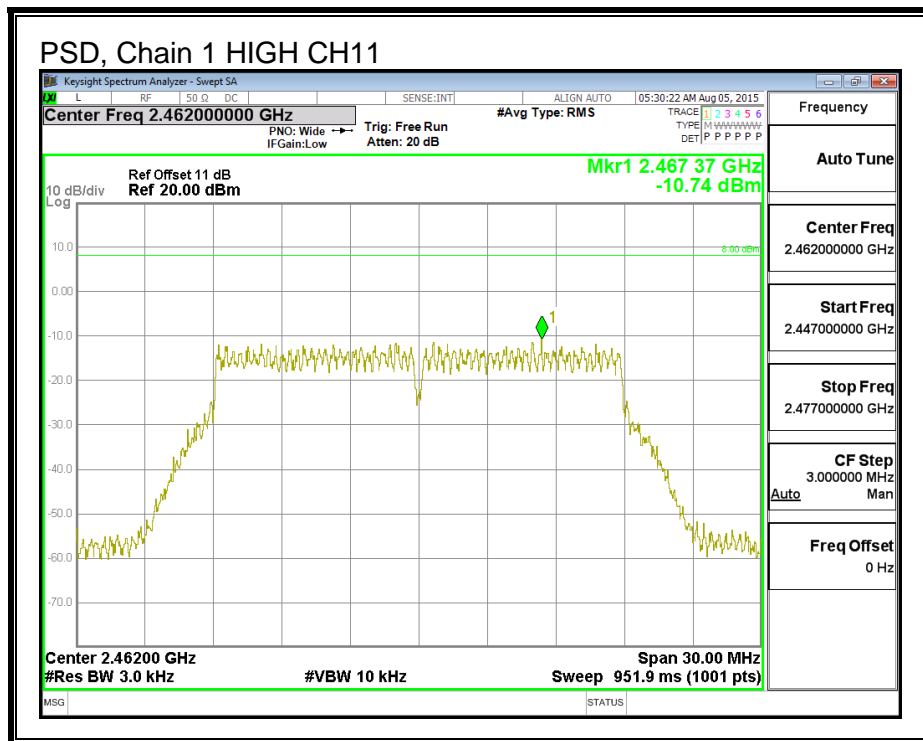



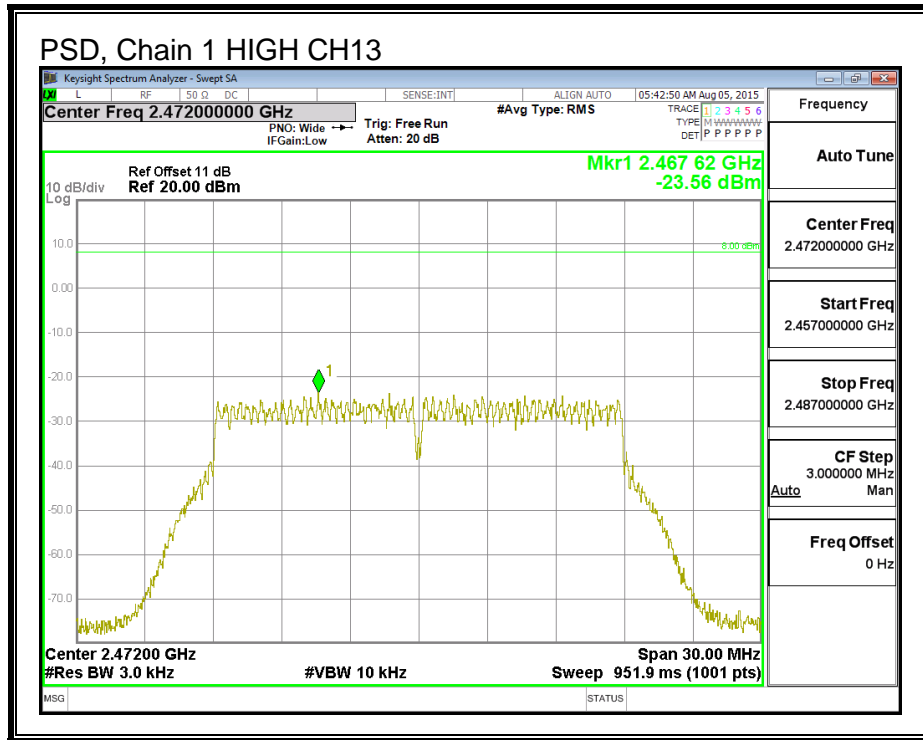

## 8.6.6. OUT-OF-BAND EMISSIONS

### LIMITS



FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

**RESULTS**


**LOW CHANNEL BANDEDGE, Chain 0**

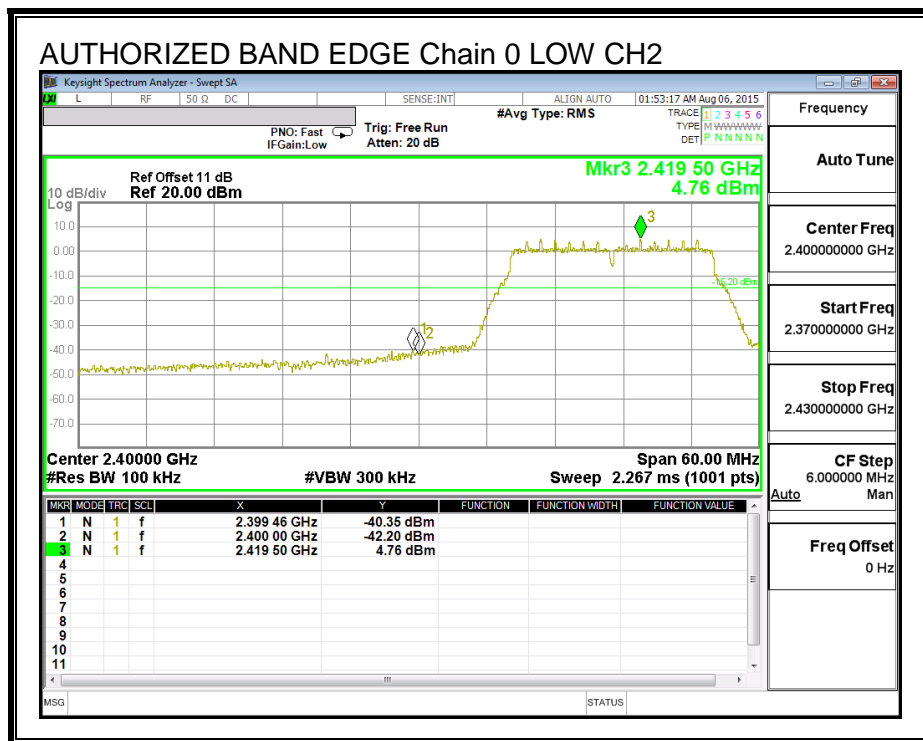
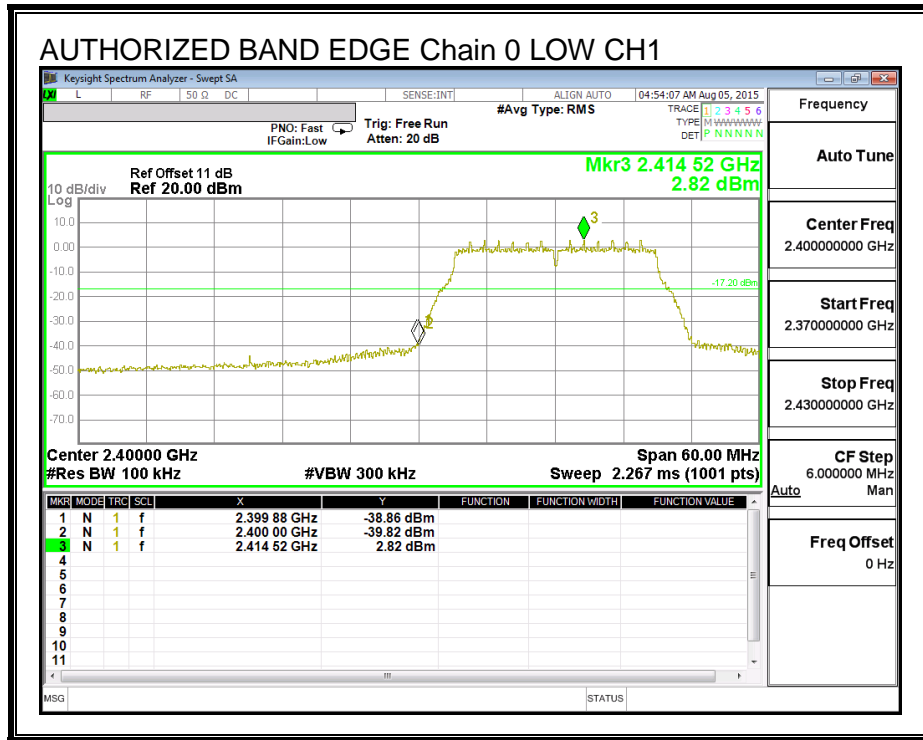



**MID CHANNEL BANDEDGE**

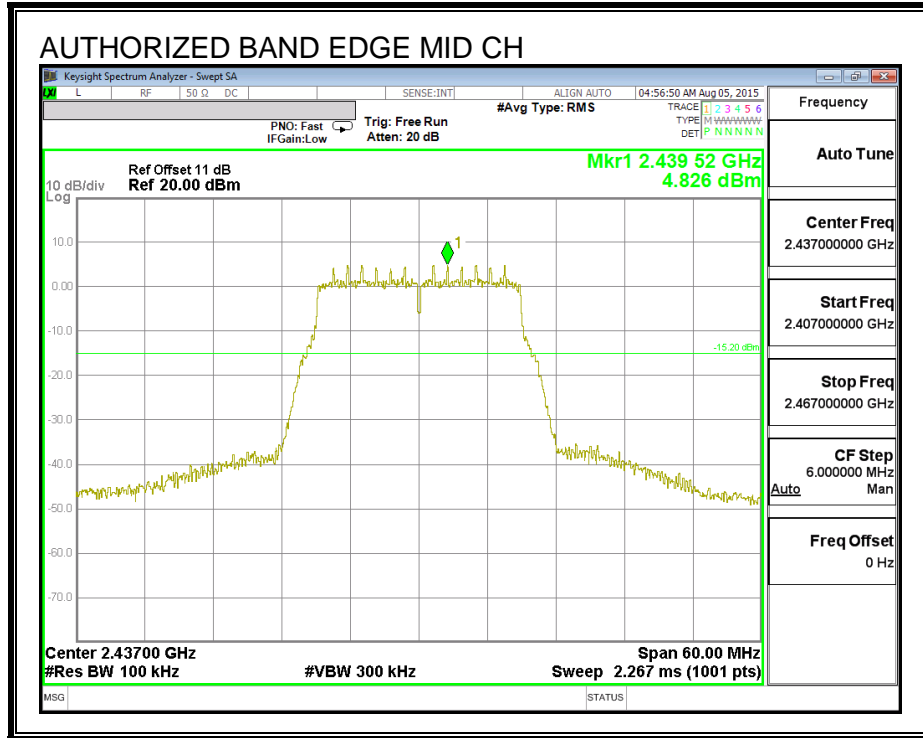



**HIGH CHANNEL BANDEDGE, Chain 0**


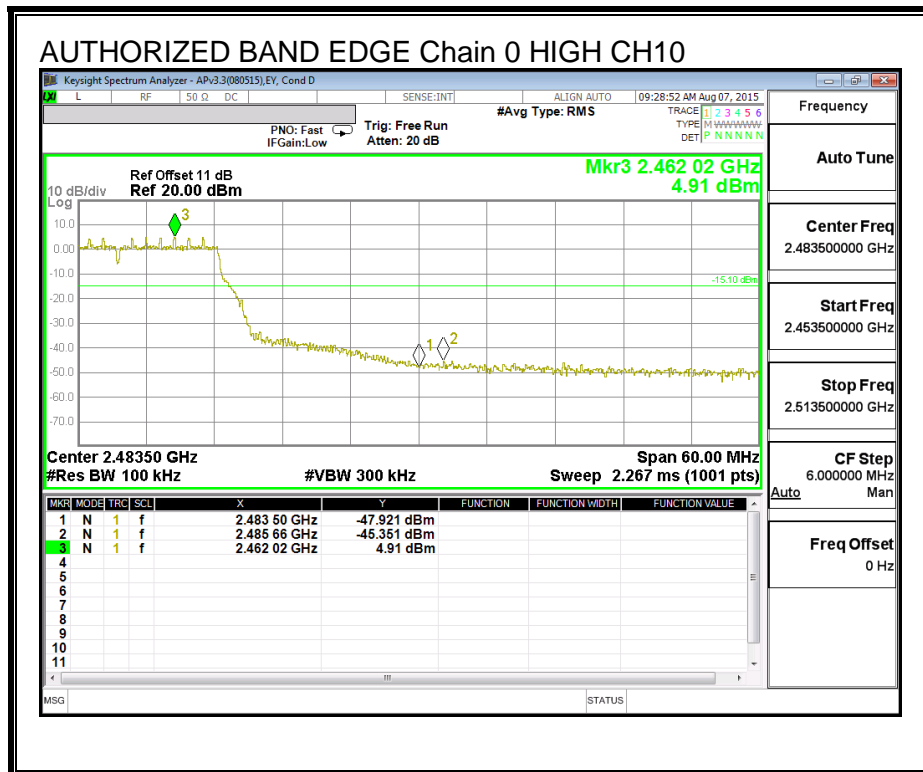


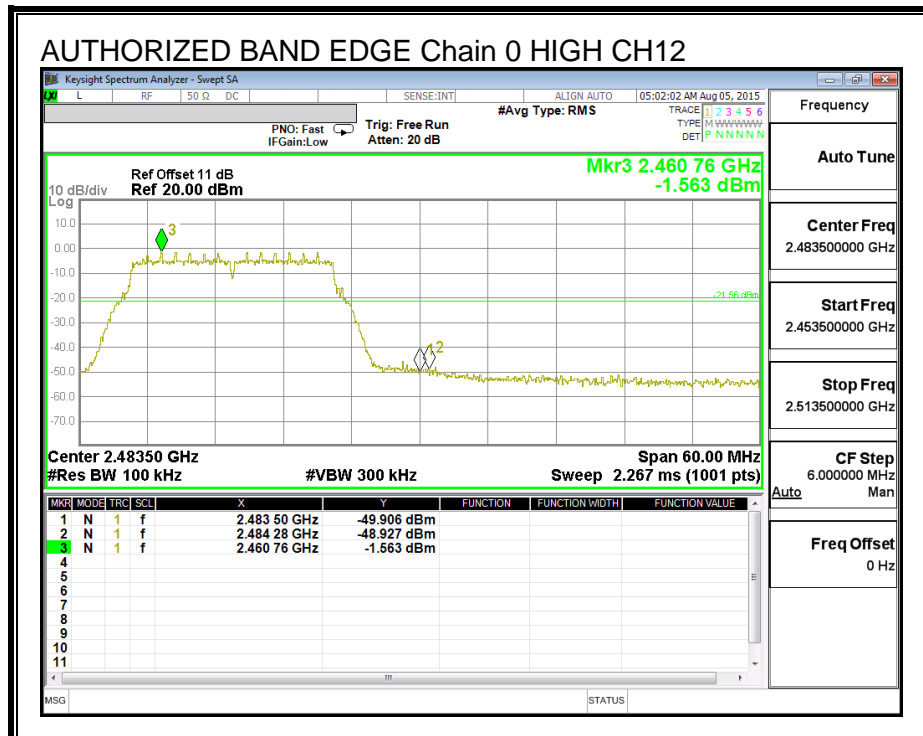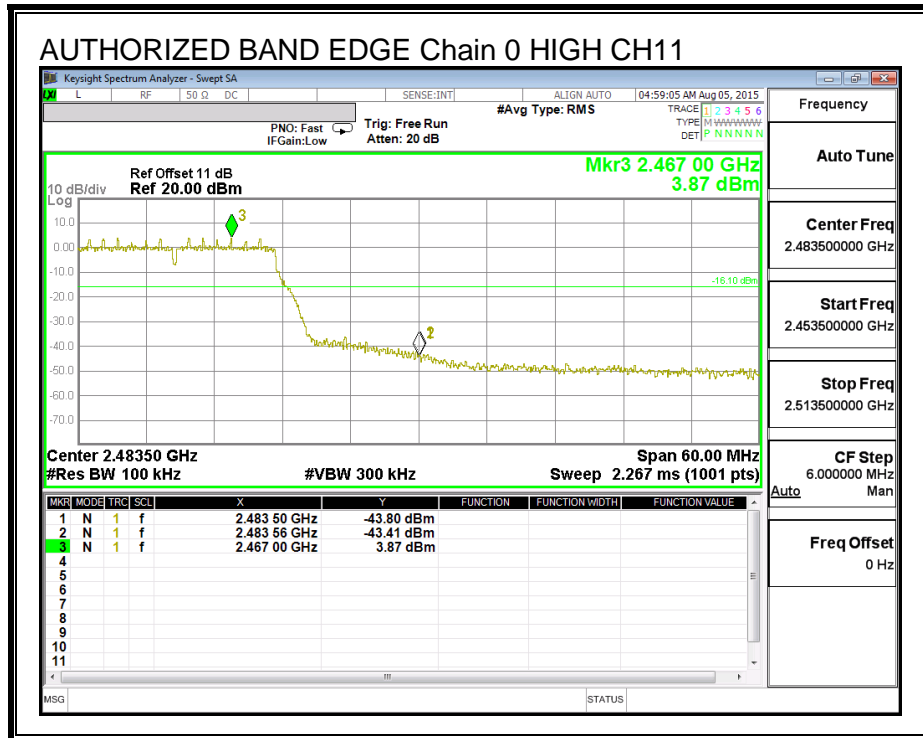


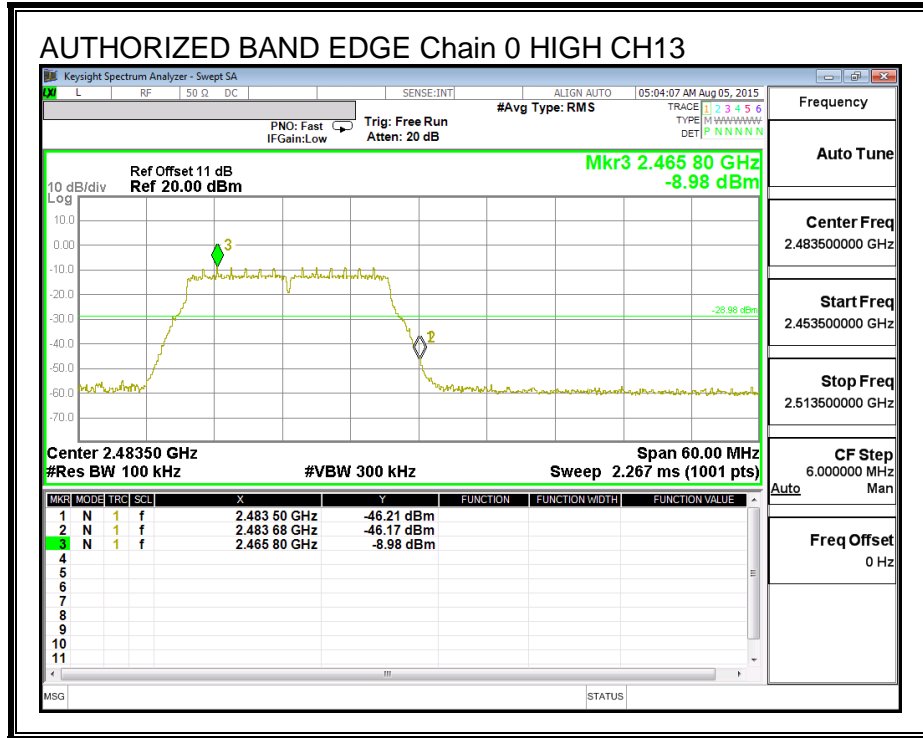



**OUT-OF-BAND EMISSIONS, Chain 0**

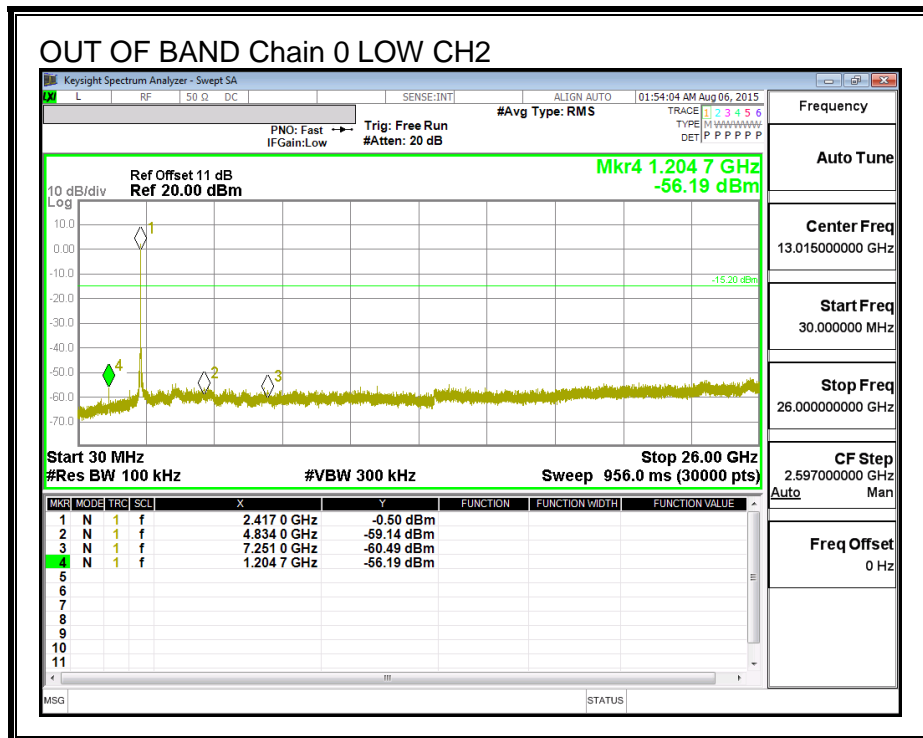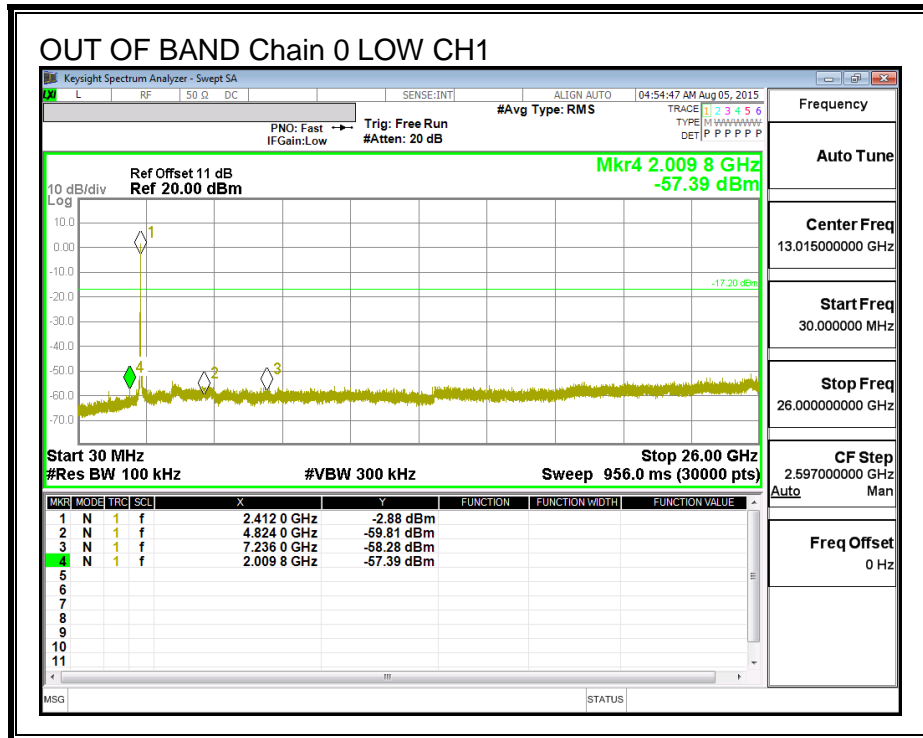

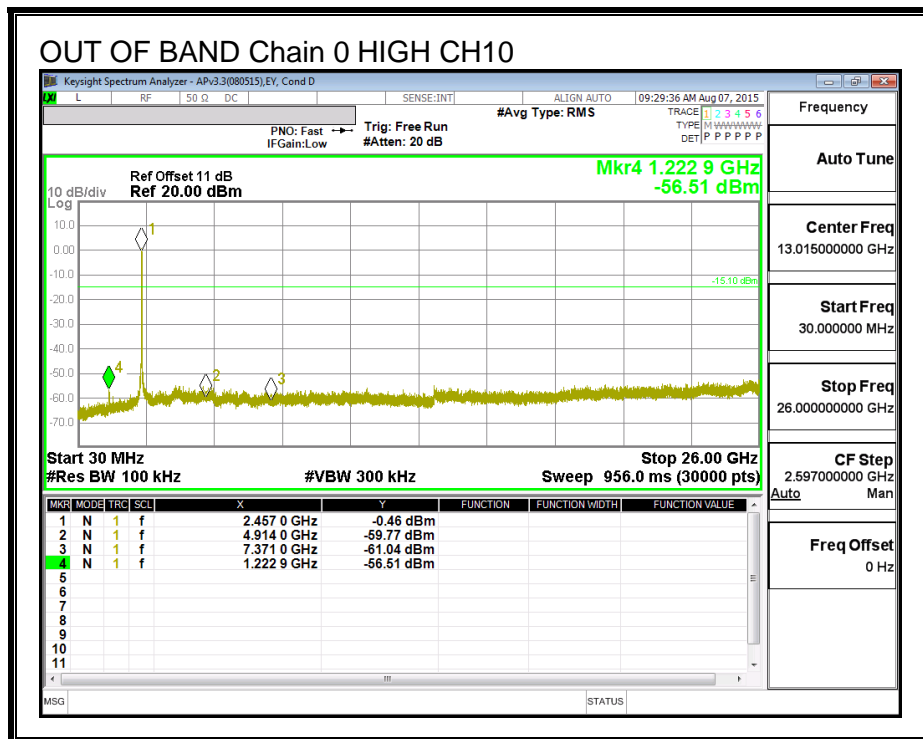
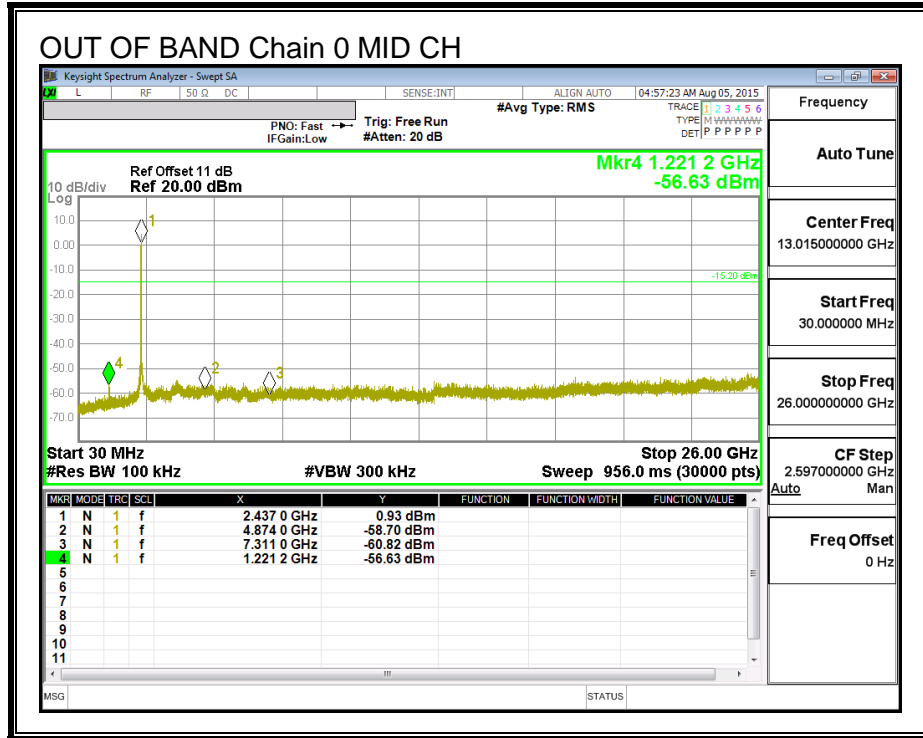




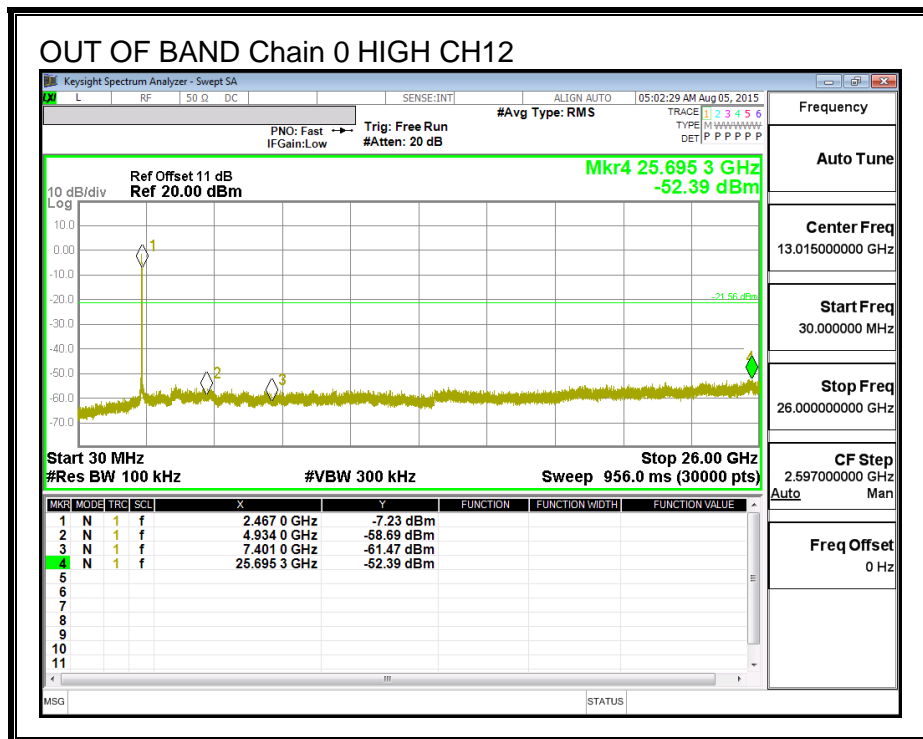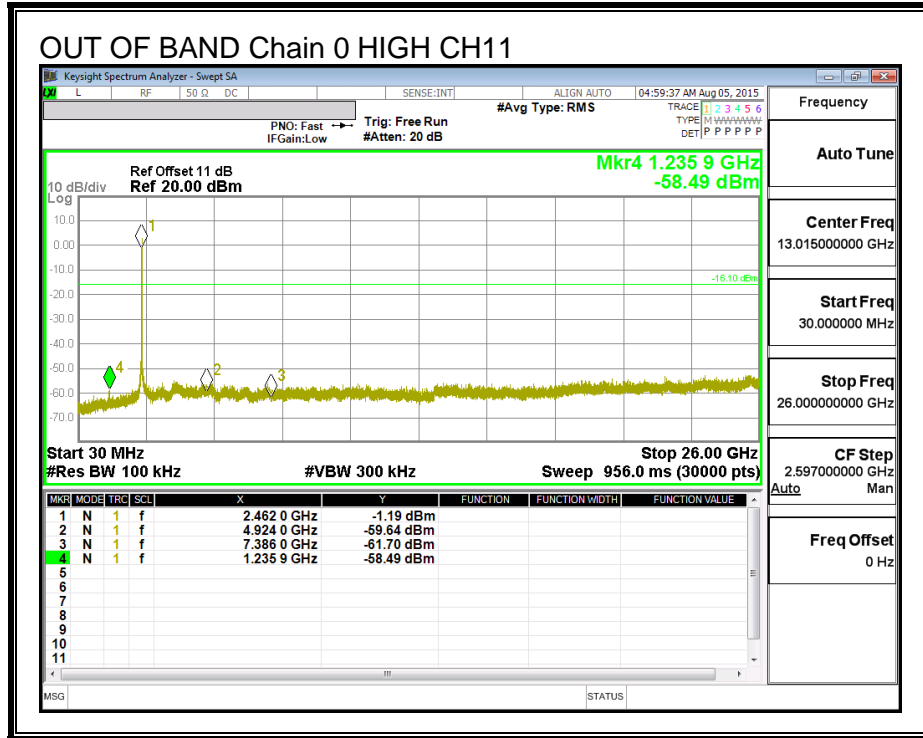


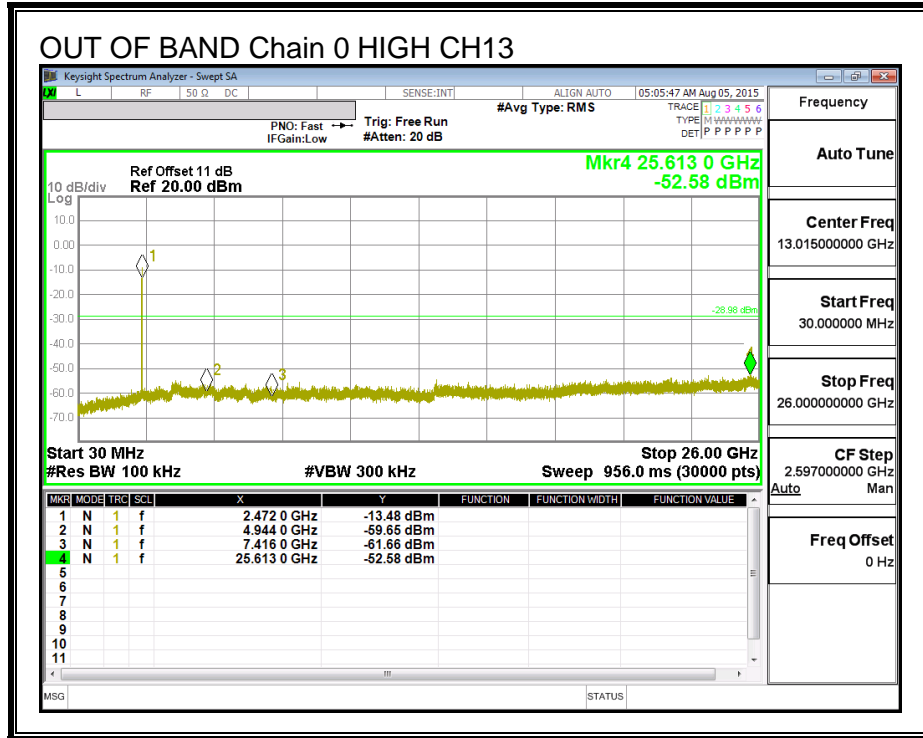


**LOW CHANNEL BANDEDGE, Chain 1**

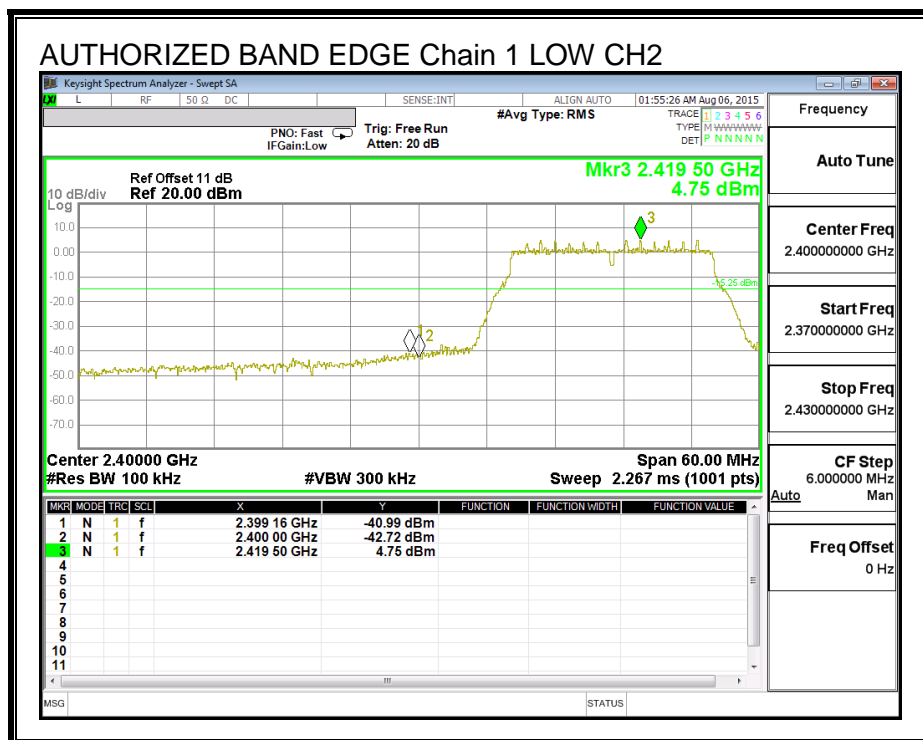
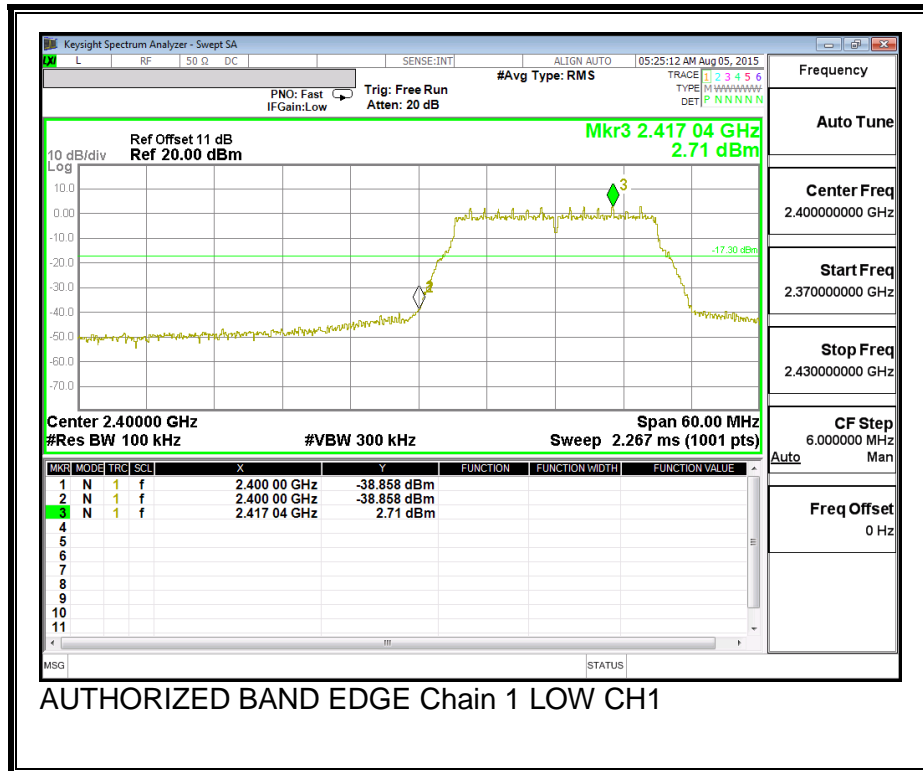



**MID CHANNEL BANDEDGE**

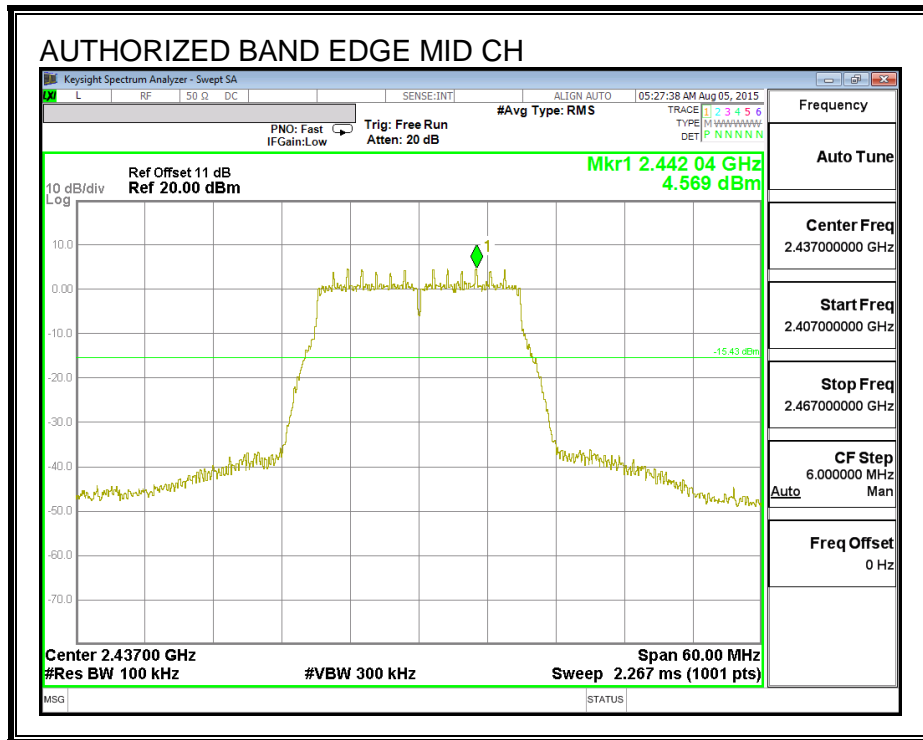

**HIGH CHANNEL BANDEDGE, Chain 1**

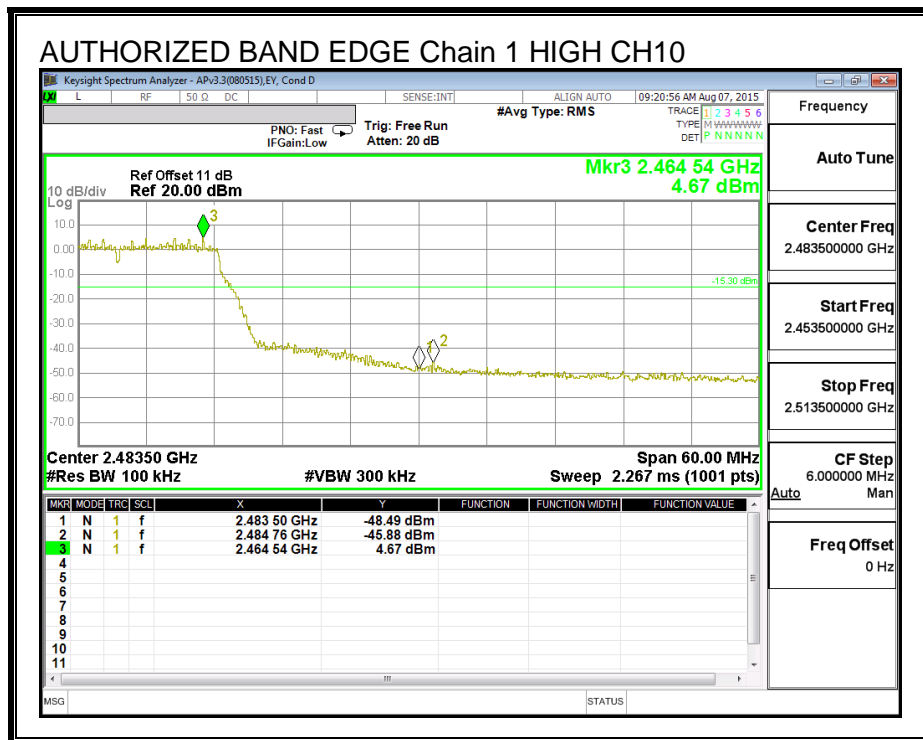

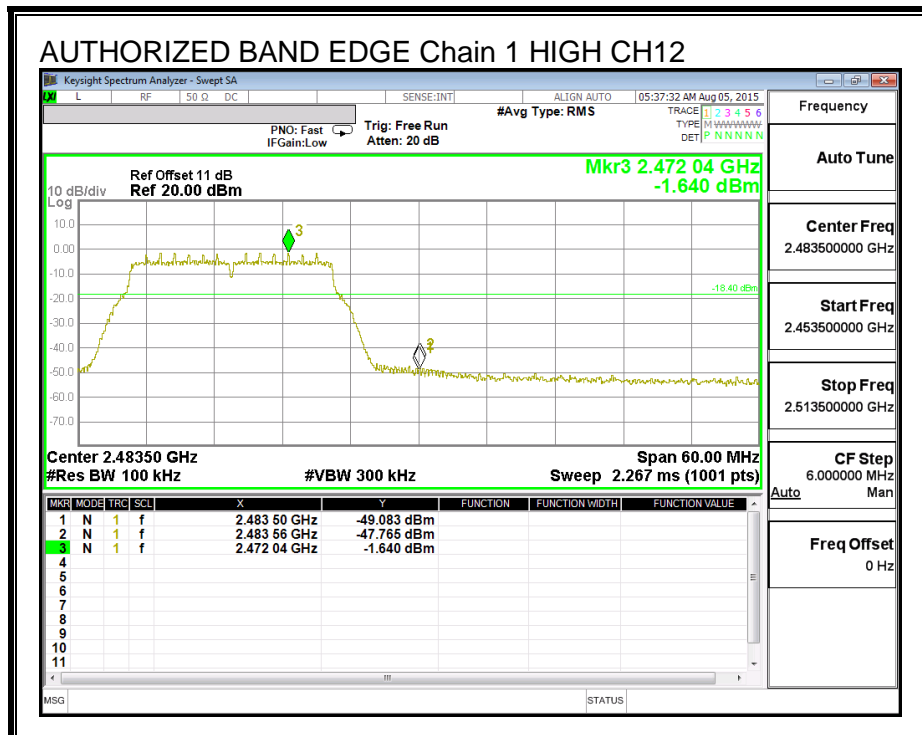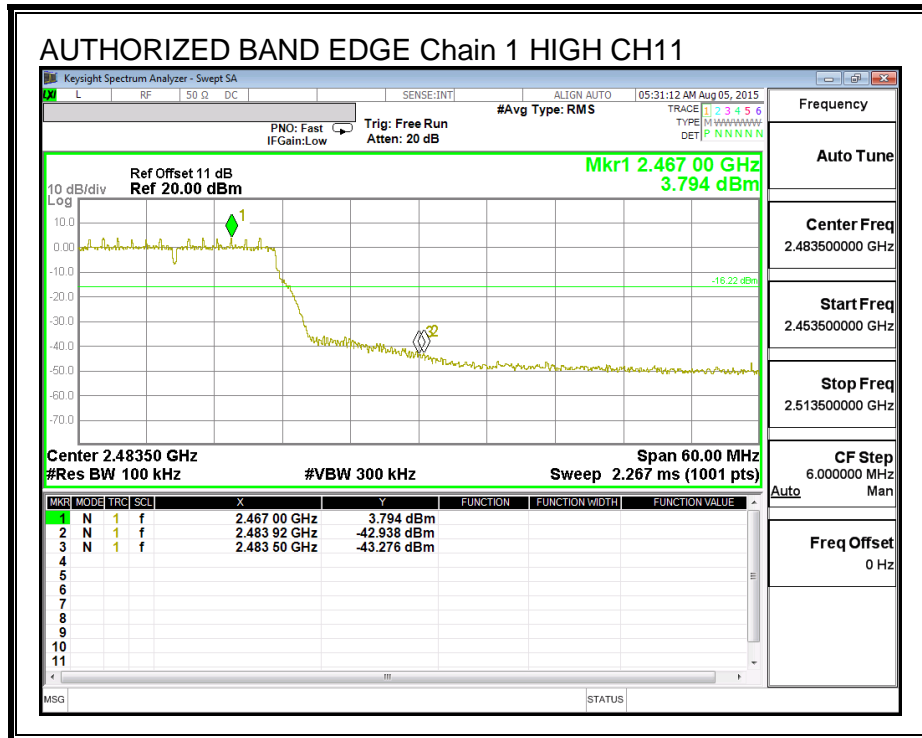

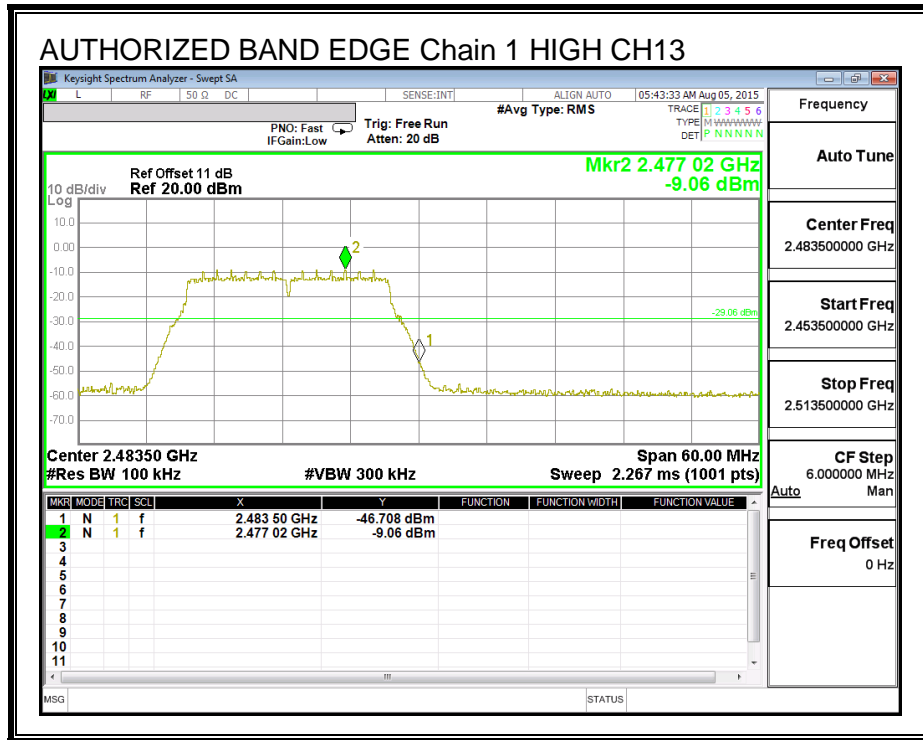

**OUT-OF-BAND EMISSIONS, Chain 1**

