


AUTHORIZED BANDEGE (HIGH CHANNEL, CH 10)

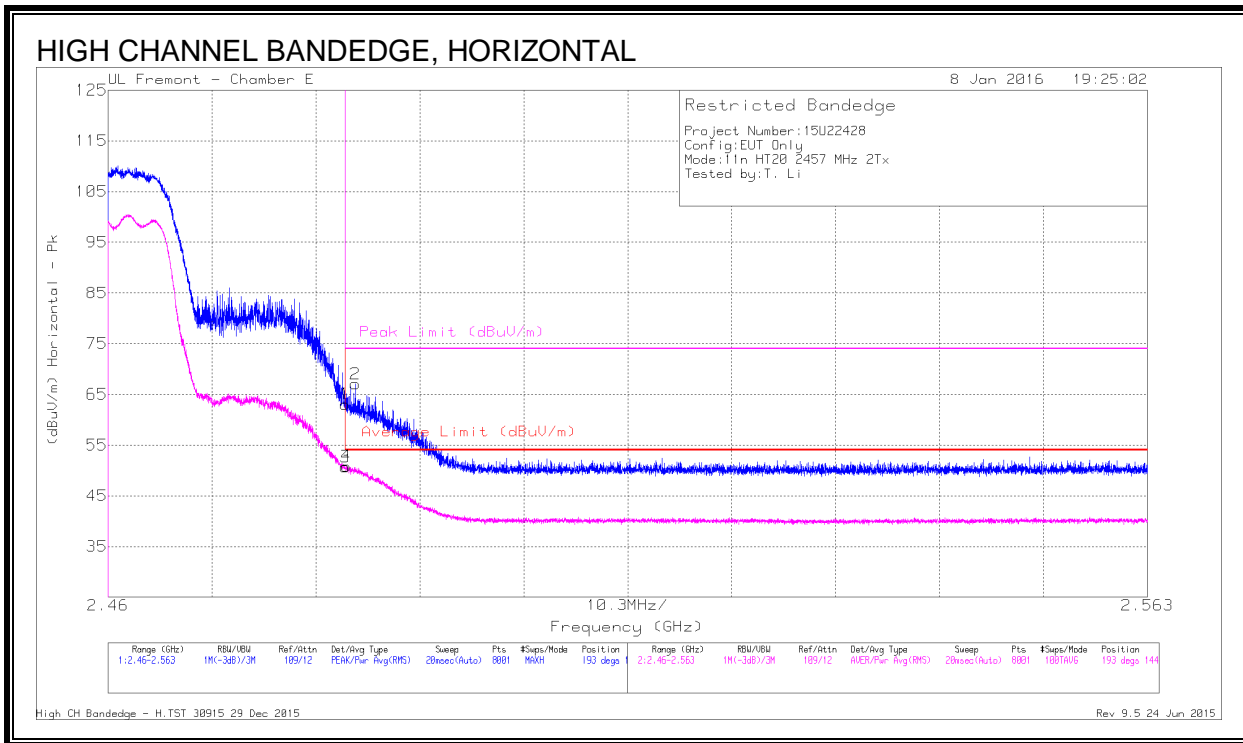


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.89	Pk	32.2	-20	63.09	-	-	74	-10.91	193	144	H
3	* 2.484	38.54	RMS	32.2	-20	50.74	54	-3.26	-	-	193	144	H
4	* 2.484	38.66	RMS	32.2	-20	50.86	54	-3.14	-	-	193	144	H
2	* 2.485	54.85	Pk	32.2	-20	67.05	-	-	74	-6.95	193	144	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

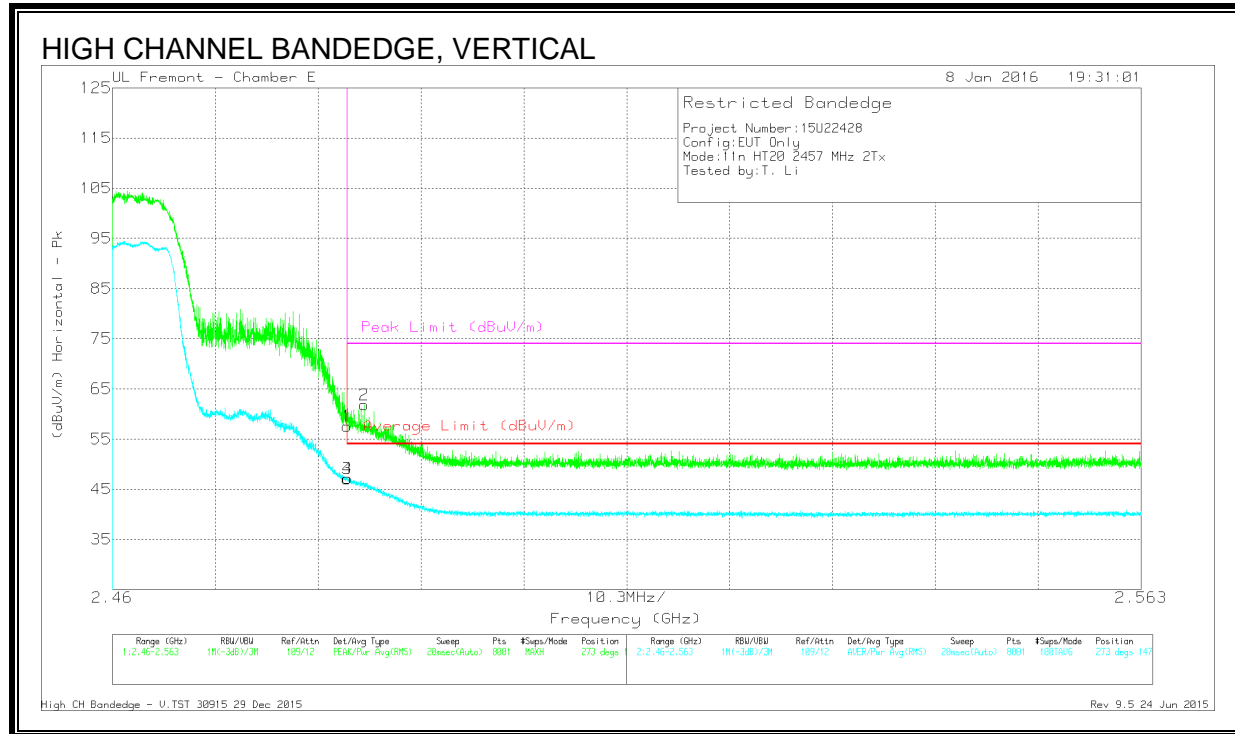


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.39	Pk	32.2	-20	57.59	-	-	74	-16.41	273	147	V
3	* 2.484	34.91	RMS	32.2	-20	47.11	54	-6.89	-	-	273	147	V
4	* 2.484	34.92	RMS	32.2	-20	47.12	54	-6.88	-	-	273	147	V
2	* 2.485	49.68	Pk	32.2	-20.1	61.78	-	-	74	-12.22	273	147	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector
 RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 11)

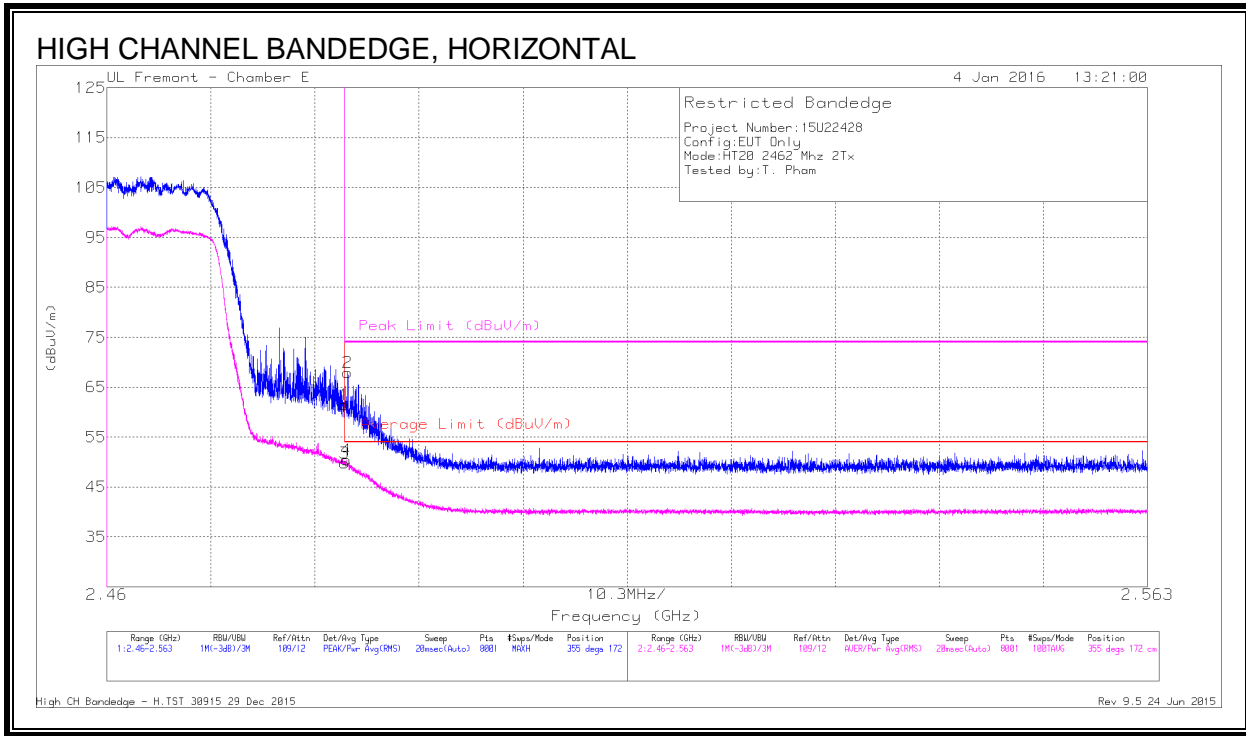


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.25	Pk	32.2	-20	61.45	-	-	74	-12.55	355	172	H
2	* 2.484	55.74	Pk	32.2	-20	67.94	-	-	74	-6.06	355	172	H
3	* 2.484	37.59	RMS	32.2	-20	49.79	54	-4.21	-	-	355	172	H
4	* 2.484	38.19	RMS	32.2	-20	50.39	54	-3.61	-	-	355	172	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

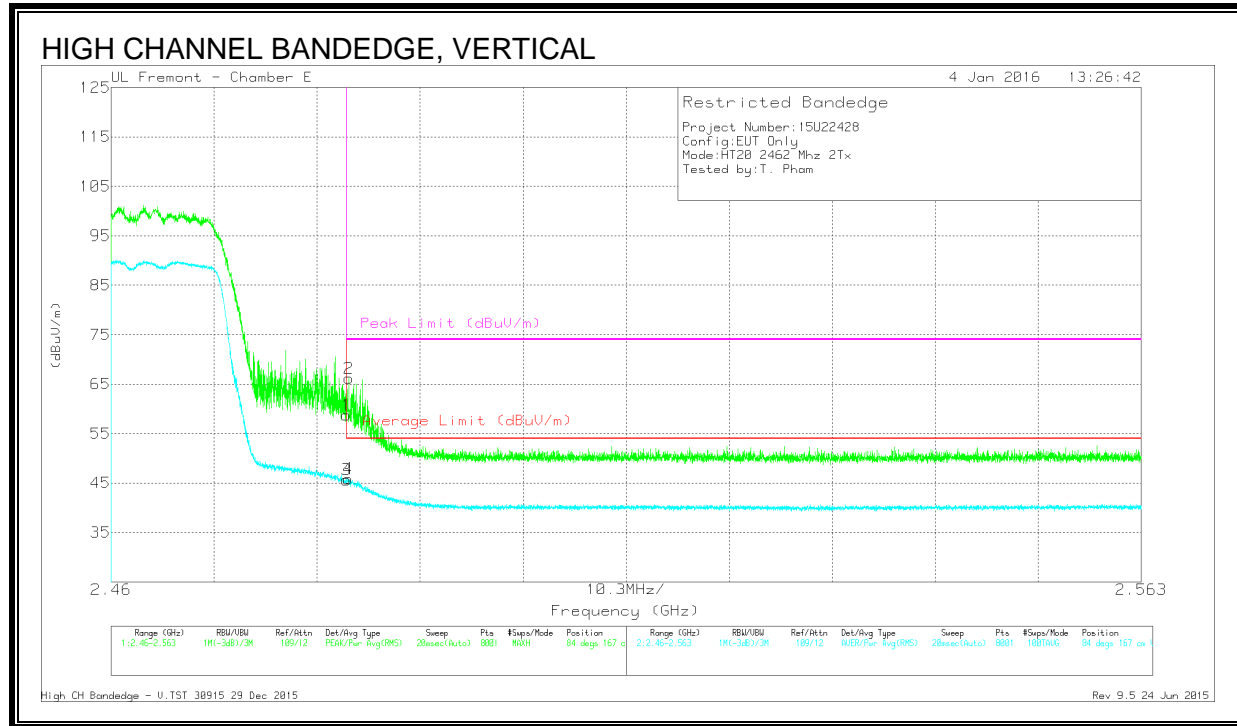

Data


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.53	Pk	32.2	-20	58.73	-	-	74	-15.27	84	167	V
2	* 2.484	54	Pk	32.2	-20	66.2	-	-	74	-7.8	84	167	V
3	* 2.484	33.44	RMS	32.2	-20	45.64	54	-8.36	-	-	84	167	V
4	* 2.484	33.68	RMS	32.2	-20	45.88	54	-8.12	-	-	84	167	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 12)

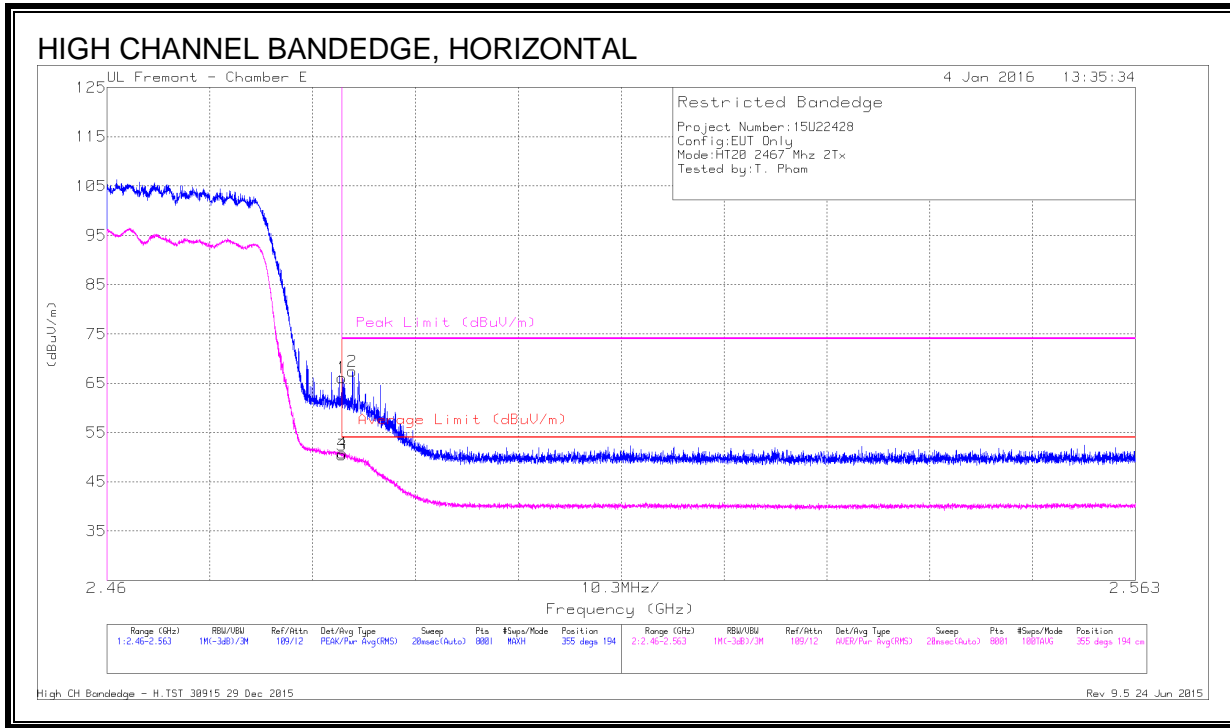


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.92	Pk	32.2	-20	66.12	-	-	74	-7.88	355	194	H
3	* 2.484	38.23	RMS	32.2	-20	50.43	54	-3.57	-	-	355	194	H
4	* 2.484	38.59	RMS	32.2	-20	50.79	54	-3.21	-	-	355	194	H
2	* 2.485	55.23	Pk	32.2	-20	67.43	-	-	74	-6.57	355	194	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

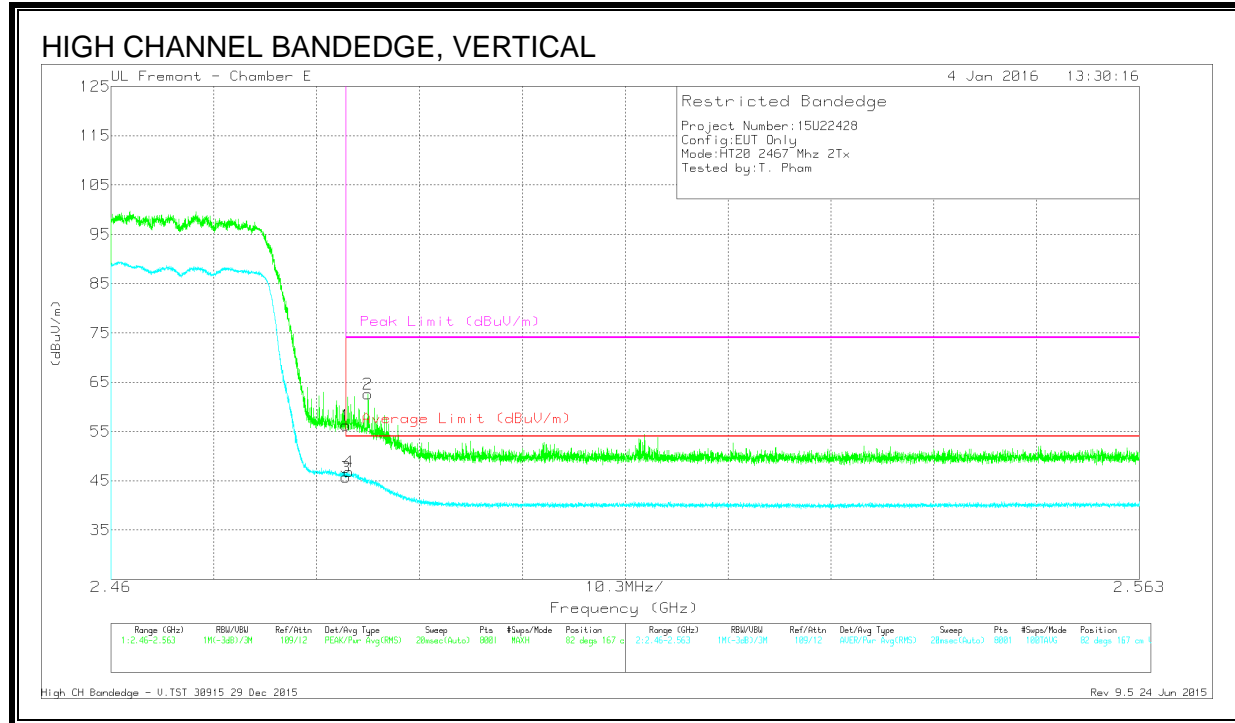

Data


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.05	Pk	32.2	-20	56.25	-	-	74	-17.75	82	167	V
3	* 2.484	33.54	RMS	32.2	-20	45.74	54	-8.26	-	-	82	167	V
4	* 2.484	34.6	RMS	32.2	-20	46.8	54	-7.2	-	-	82	167	V
2	* 2.486	50.45	Pk	32.2	-20.1	62.55	-	-	74	-11.45	82	167	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 13)

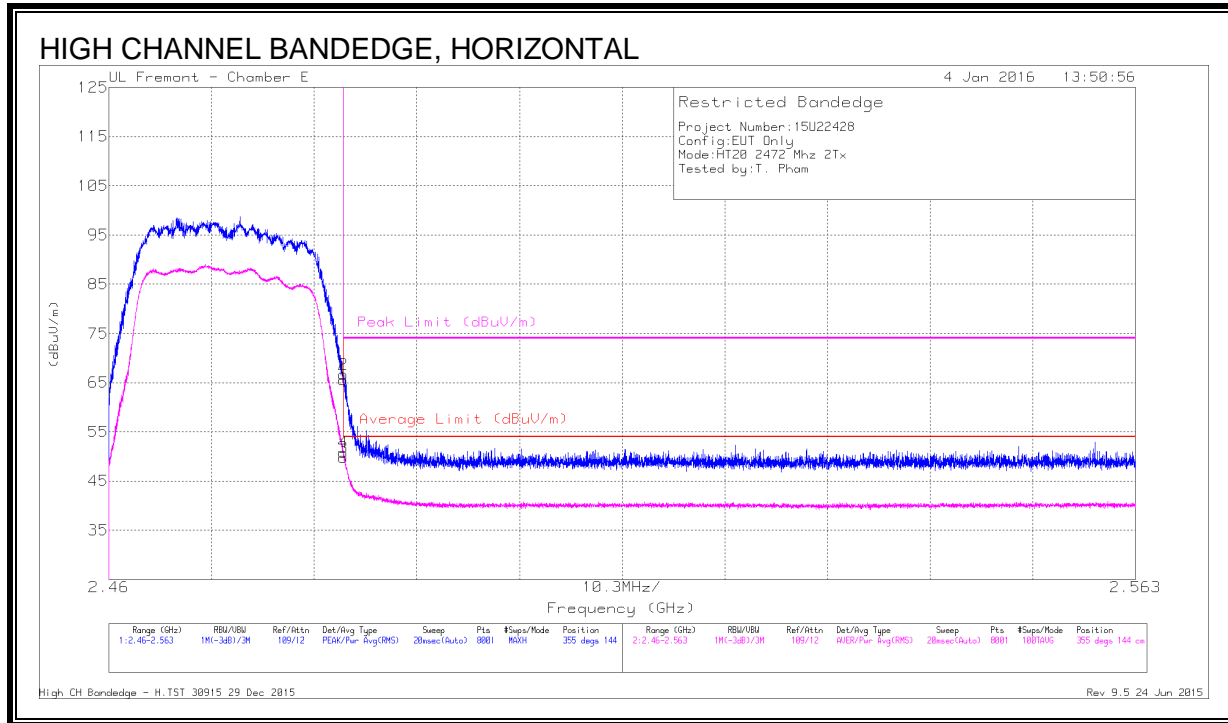


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.37	Pk	32.2	-20	65.57	-	-	74	-8.43	355	144	H
2	* 2.484	54.49	Pk	32.2	-20	66.69	-	-	74	-7.31	355	144	H
3	* 2.484	37.59	RMS	32.2	-20	49.79	54	-4.21	-	-	355	144	H
4	* 2.484	38.58	RMS	32.2	-20	50.78	54	-3.22	-	-	355	144	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

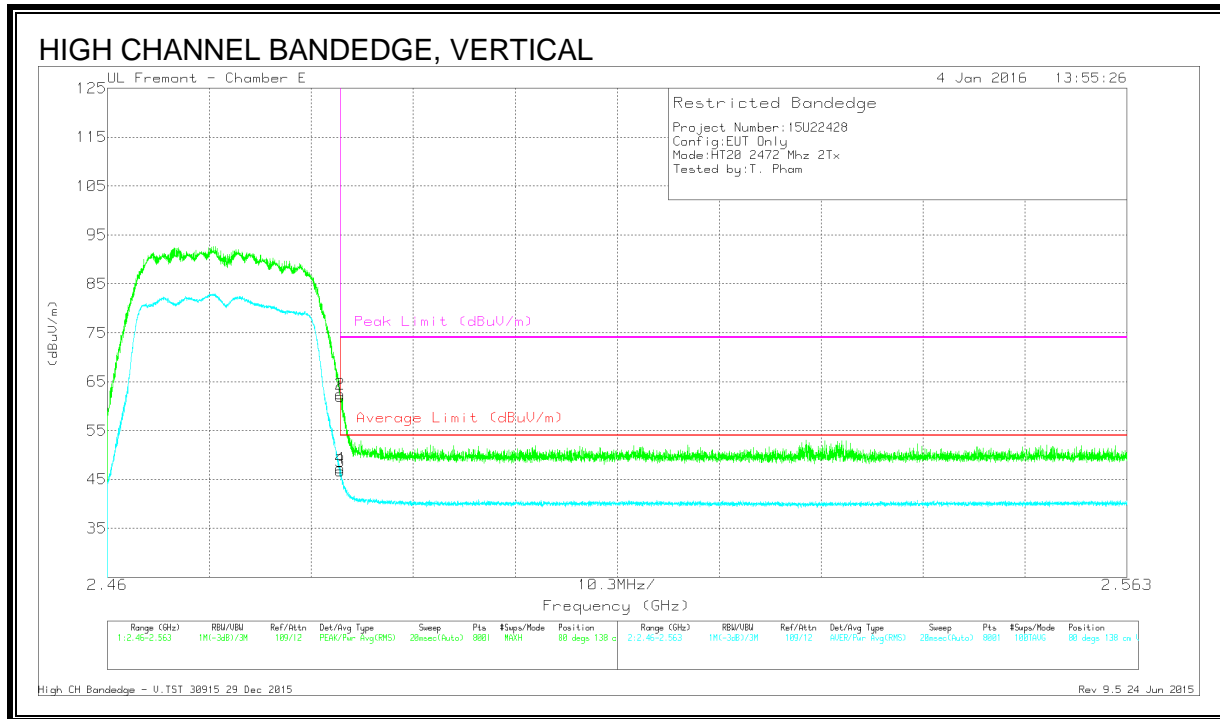

Data



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.78	Pk	32.2	-20	61.98	-	-	74	-12.02	80	138	V
2	* 2.484	50.3	Pk	32.2	-20	62.5	-	-	74	-11.5	80	138	V
3	* 2.484	34.55	RMS	32.2	-20	46.75	54	-7.25	-	-	80	138	V
4	* 2.484	35.14	RMS	32.2	-20	47.34	54	-6.66	-	-	80	138	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL, CH 1

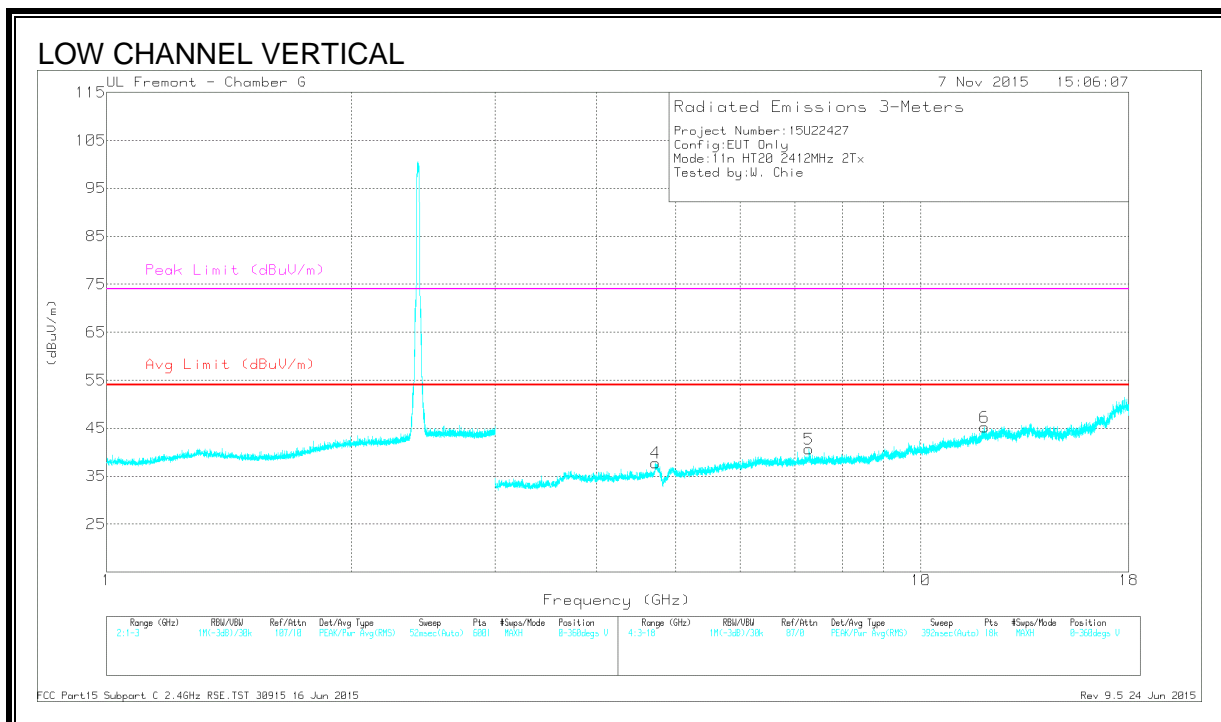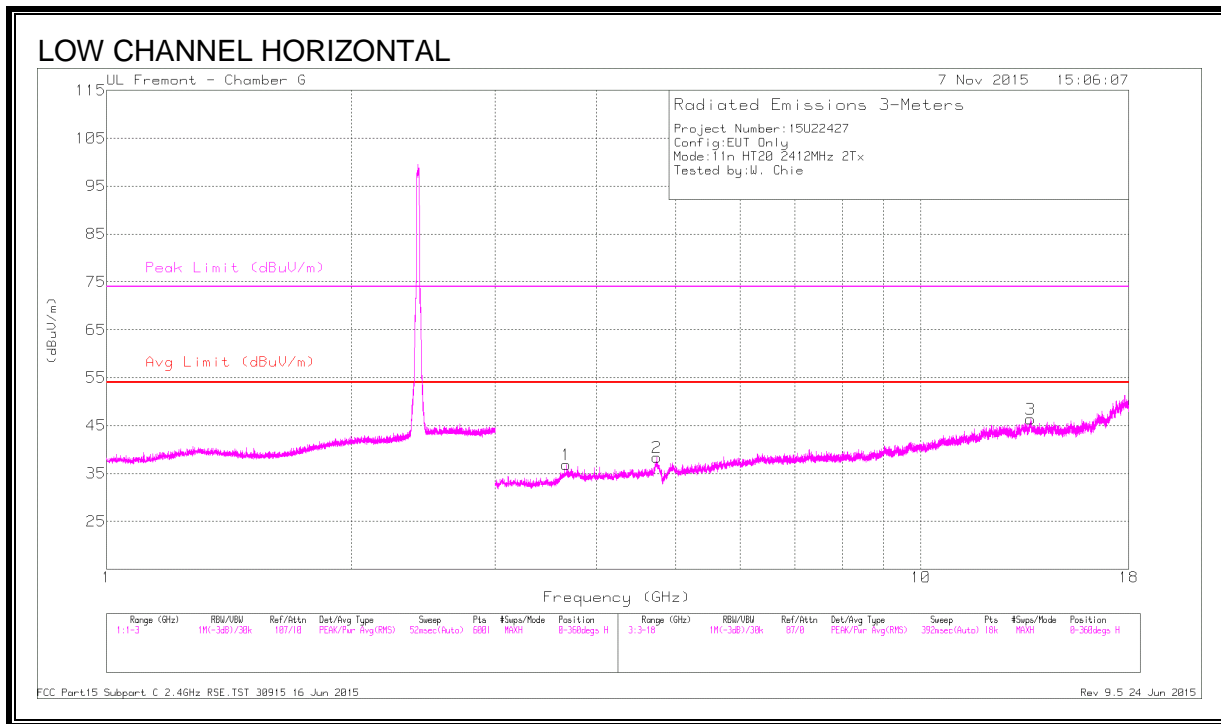

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.669	41.89	PK2	33	-31.7	43.19	-	-	74	-30.81	199	186	H
	* 3.667	29.79	MAv1	33.1	-31.7	31.19	54	-22.81	-	-	199	186	H
2	* 4.742	43.29	PK2	33.9	-32.4	44.79	-	-	74	-29.21	155	110	H
	* 4.742	31.67	MAv1	33.9	-32.4	33.17	54	-20.83	-	-	155	110	H
4	* 4.721	44.14	PK2	33.9	-32.3	45.74	-	-	74	-28.26	332	142	V
	* 4.72	32	MAv1	33.9	-32.3	33.6	54	-21.7	-	-	332	142	V
5	* 7.29	41.05	PK2	35.6	-29.9	46.75	-	-	74	-27.25	44	118	V
	* 7.29	29.02	MAv1	35.6	-29.9	34.72	54	-19.28	-	-	44	118	V
6	* 11.973	37.65	PK2	38.8	-25	51.45	-	-	74	-22.55	231	256	V
	* 11.974	25.98	MAv1	38.8	-25	39.78	54	-14.22	-	-	231	256	V
3	13.633	38.38	PK2	39.2	-24.8	52.78	-	-	-	-	238	196	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS MID CHANNEL, CH 6

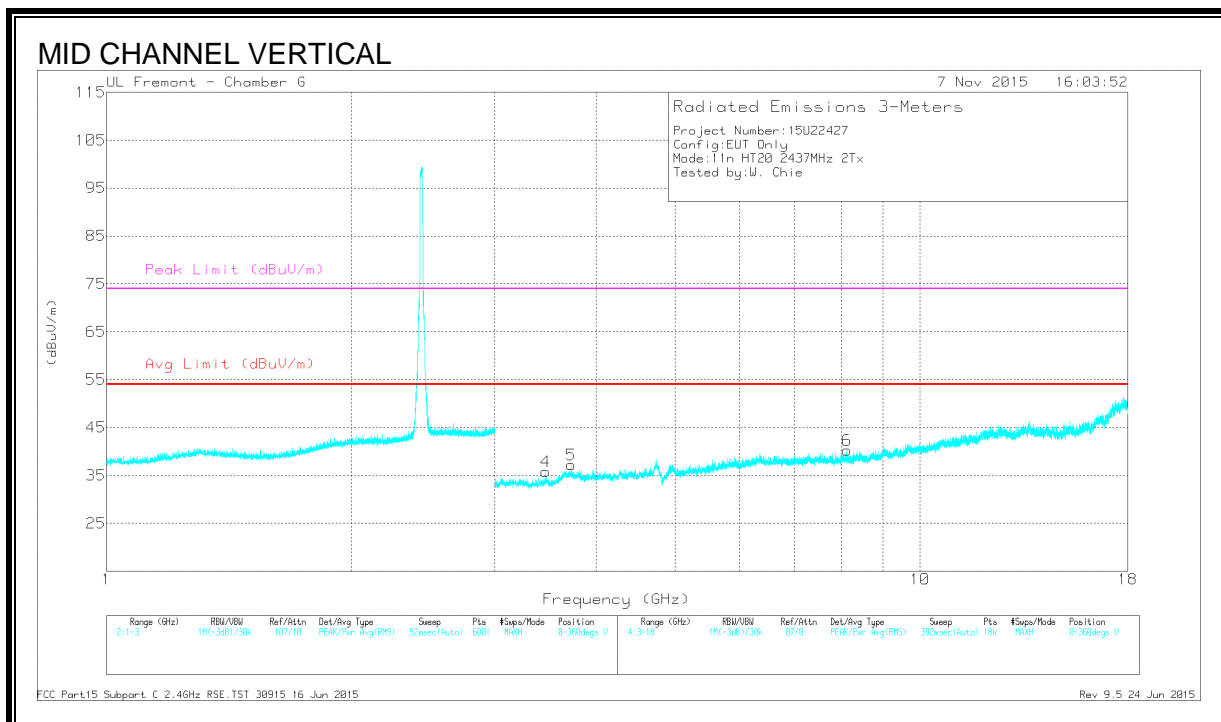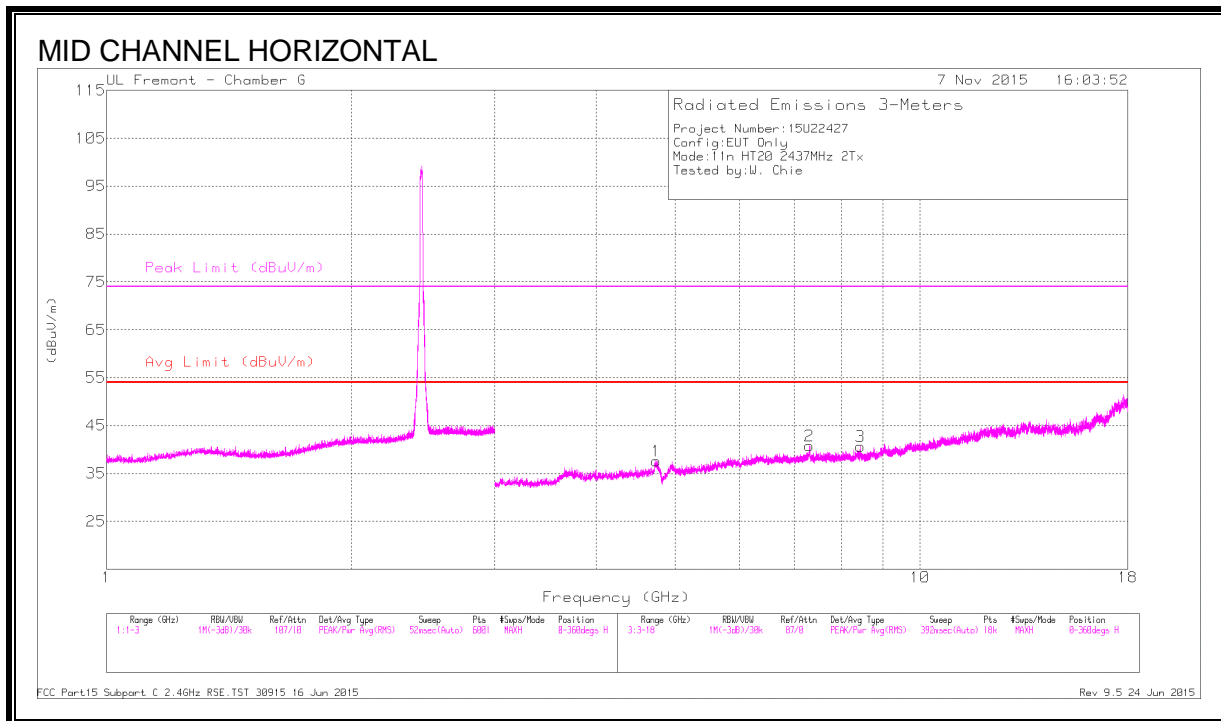

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.739	43.57	PK2	33.9	-32.3	45.17	-	-	74	-28.83	43	199	H
	* 4.74	31.94	MAv1	33.9	-32.3	33.54	54	-20.46	-	-	43	199	H
2	* 7.31	40.78	PK2	35.6	-30.4	45.98	-	-	74	-28.02	117	153	H
	* 7.309	29.32	MAv1	35.6	-30.4	34.52	54	-19.48	-	-	117	153	H
3	* 8.445	40.26	PK2	35.7	-29	46.96	-	-	74	-27.04	286	169	H
	* 8.442	28.22	MAv1	35.7	-29	34.92	54	-19.08	-	-	286	169	H
5	* 3.724	41.05	PK2	33	-31.4	42.65	-	-	74	-31.35	246	256	V
	* 3.725	29.46	MAv1	33	-31.4	31.06	54	-22.94	-	-	246	256	V
6	* 8.131	40.25	PK2	35.7	-29.4	46.55	-	-	74	-27.45	326	223	V
	* 8.129	28.53	MAv1	35.7	-29.4	34.83	54	-19.17	-	-	326	223	V
4	3.464	41.83	PK2	32.9	-32.6	42.13	-	-	-	-	68	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 11

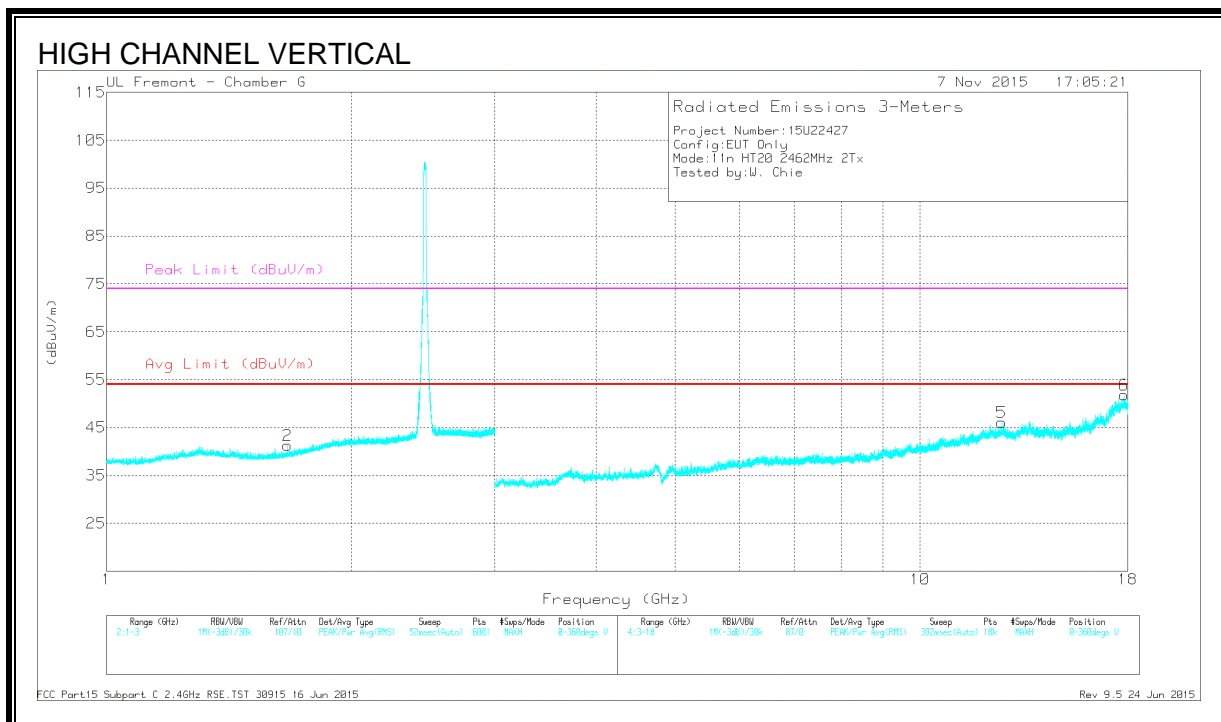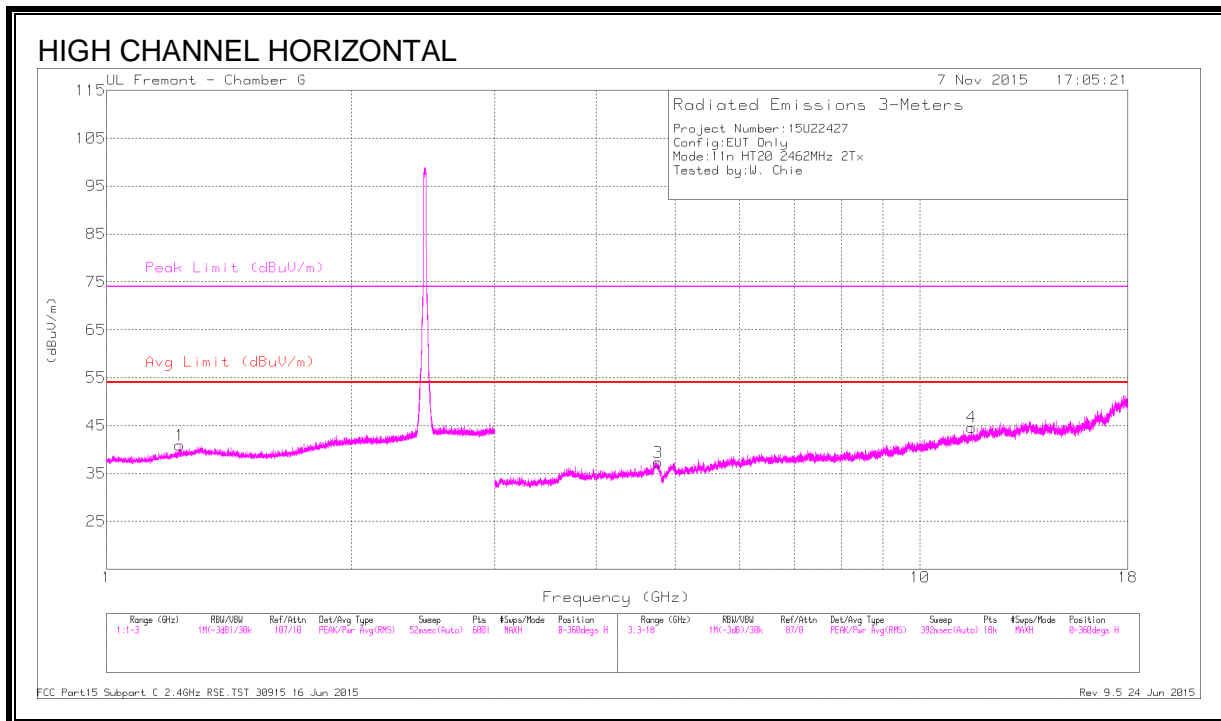

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.231	44.72	PK2	28.7	-25.7	47.72	-	-	74	-26.28	197	222	H
	* 1.231	32.13	MAv1	28.7	-25.7	35.13	54	-18.87	-	-	197	222	H
2	* 1.67	44.17	PK2	28.7	-25	47.87	-	-	74	-26.13	137	122	V
	* 1.67	31.8	MAv1	28.7	-25	35.5	54	-18.5	-	-	137	122	V
3	* 4.761	43.86	PK2	34	-32.5	45.36	-	-	74	-28.64	110	122	H
	* 4.761	32.16	MAv1	34	-32.5	33.66	54	-20.34	-	-	110	122	H
4	* 11.57	37.62	PK2	38.3	-25.7	50.22	-	-	74	-23.78	356	125	H
	* 11.568	26.21	MAv1	38.3	-25.6	38.91	54	-15.09	-	-	356	125	H
5	* 12.595	37.79	PK2	39.2	-25.1	51.89	-	-	74	-22.11	27	238	V
	* 12.595	26.37	MAv1	39.2	-25	40.57	54	-13.43	-	-	27	238	V
6	* 17.81	36.24	PK2	41.4	-19.2	58.44	-	-	74	-15.56	224	306	V
	* 17.808	24.63	MAv1	41.4	-19.2	46.83	54	-7.17	-	-	224	306	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 12

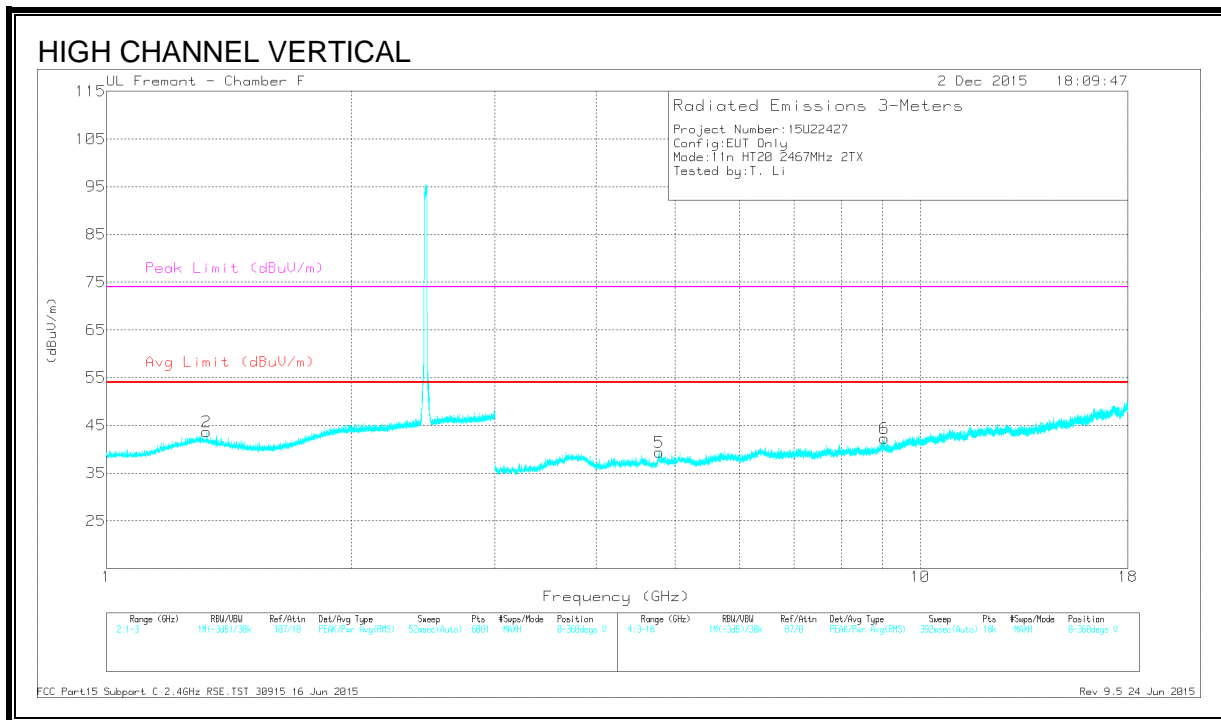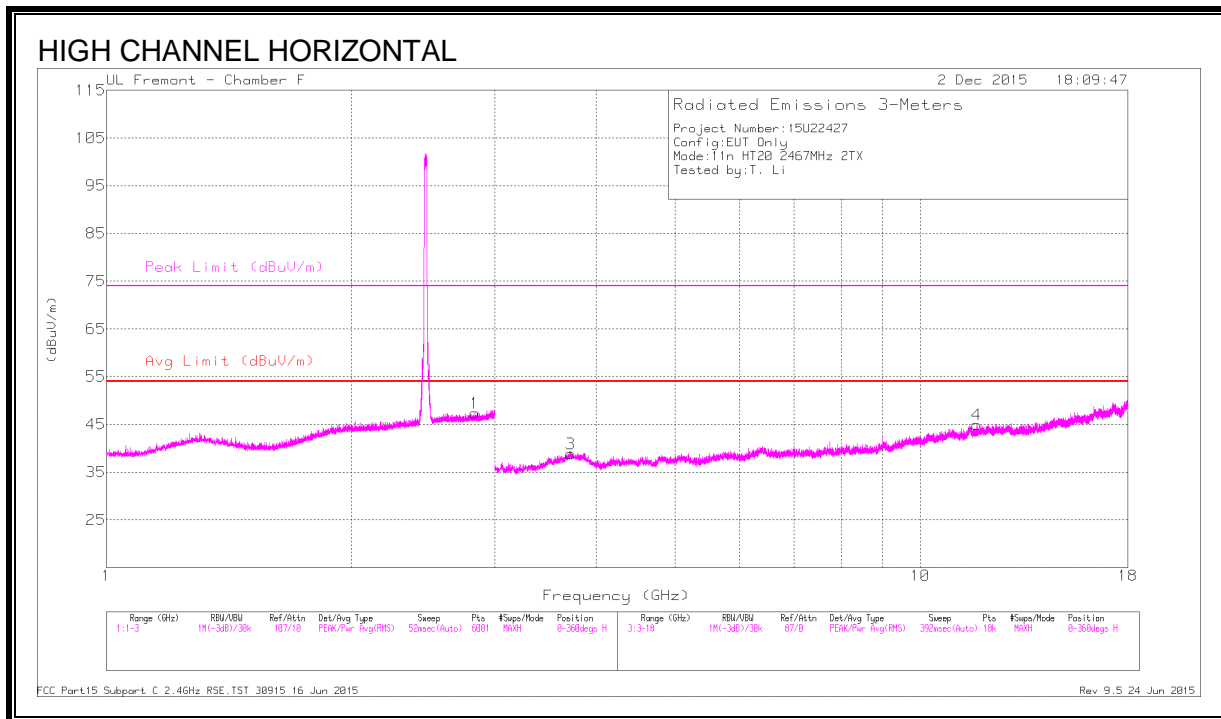

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.835	42.63	PK2	32.7	-20.5	54.83	-	-	74	-19.17	91	281	H
	* 2.834	30.28	MAv1	32.7	-20.5	42.48	54	-11.52	-	-	91	281	H
2	* 1.33	42.21	PK2	29.8	-22.2	49.81	-	-	74	-24.19	239	300	V
	* 1.329	30.55	MAv1	29.8	-22.2	38.15	54	-15.85	-	-	239	300	V
3	* 3.722	40.09	PK2	34.6	-29.4	45.29	-	-	74	-28.71	129	159	H
	* 3.72	28.08	MAv1	34.6	-29.4	33.28	54	-20.72	-	-	129	159	H
4	* 11.738	34.67	PK2	38.9	-22.5	51.07	-	-	74	-22.93	154	260	H
	* 11.739	23.46	MAv1	38.9	-22.5	39.86	54	-14.14	-	-	154	260	H
5	* 4.776	39.36	PK2	34.1	-28.1	45.36	-	-	74	-28.64	101	213	V
	* 4.779	28.06	MAv1	34.1	-28.1	34.06	54	-19.94	-	-	101	213	V
6	* 9.045	34.61	PK2	36.1	-22.7	48.01	-	-	74	-25.99	299	326	V
	* 9.044	23.57	MAv1	36.1	-22.7	36.97	54	-17.03	-	-	299	326	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 13

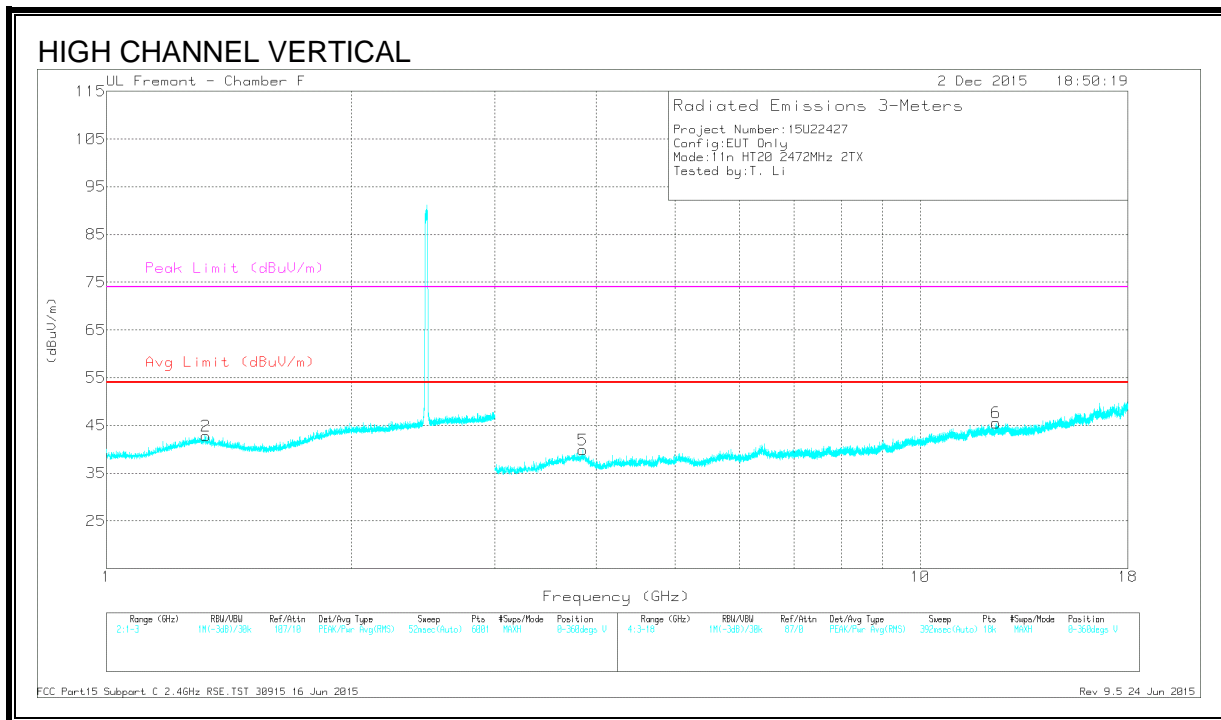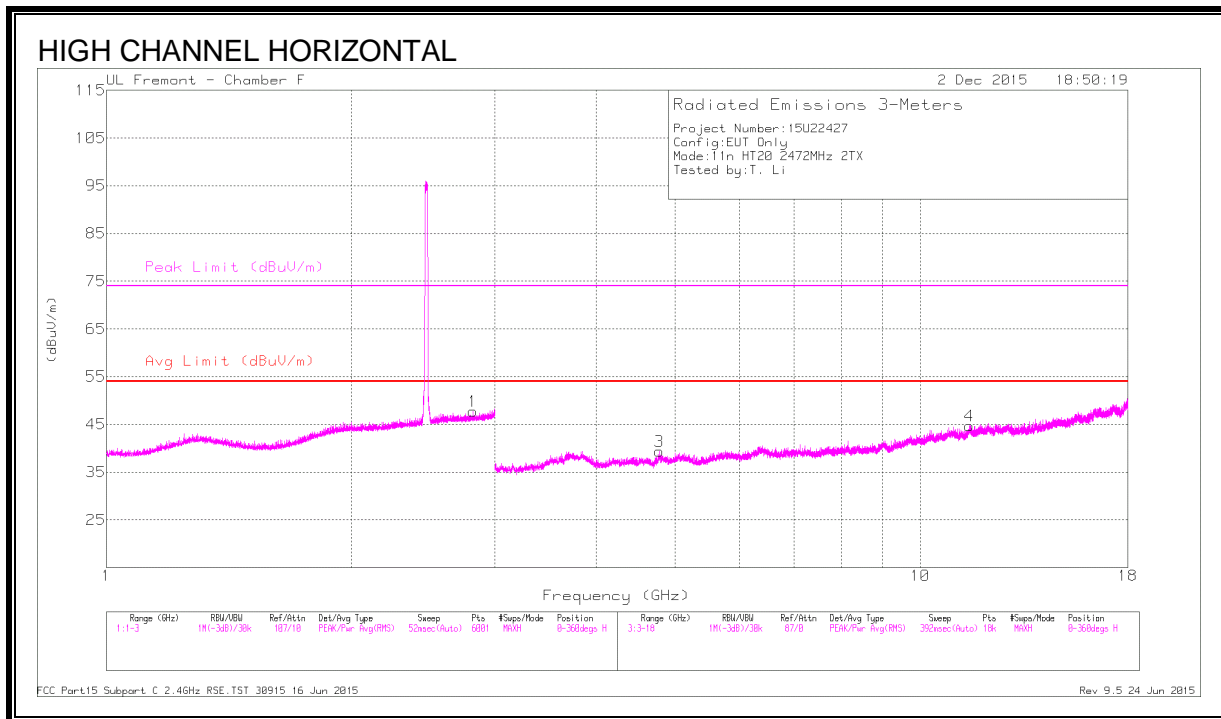

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.82	41.87	PK2	32.7	-20.5	54.07	-	-	74	-19.93	171	181	H
	* 2.82	30.41	MAv1	32.7	-20.5	42.61	54	-11.39	-	-	171	181	H
2	* 1.324	42.68	PK2	29.8	-22.2	50.28	-	-	74	-23.72	102	252	V
	* 1.322	30.54	MAv1	29.8	-22.2	38.14	54	-15.86	-	-	102	252	V
3	* 4.78	39.21	PK2	34.1	-28.1	45.21	-	-	74	-28.79	190	285	H
	* 4.78	28.16	MAv1	34.1	-28.1	34.16	54	-19.84	-	-	190	285	H
4	* 11.492	34.48	PK2	38.6	-21.4	51.68	-	-	74	-22.32	271	207	H
	* 11.491	22.96	MAv1	38.6	-21.4	40.16	54	-13.84	-	-	271	207	H
5	* 3.85	40.18	PK2	34	-28.3	45.88	-	-	74	-28.12	85	145	V
	* 3.852	27.92	MAv1	34	-28.3	33.62	54	-20.38	-	-	85	145	V
6	* 12.406	34.87	PK2	39.1	-22.4	51.57	-	-	74	-22.43	234	309	V
	* 12.406	23.99	MAv1	39.1	-22.4	40.69	54	-13.31	-	-	234	309	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

9.2.8. 802.11n HT20 2TX MODE IN THE 2.4 GHz BAND (ANTENNA A+ANTENNA D)

RESTRICTED BANDEDGE (LOW CHANNEL, CH 1)

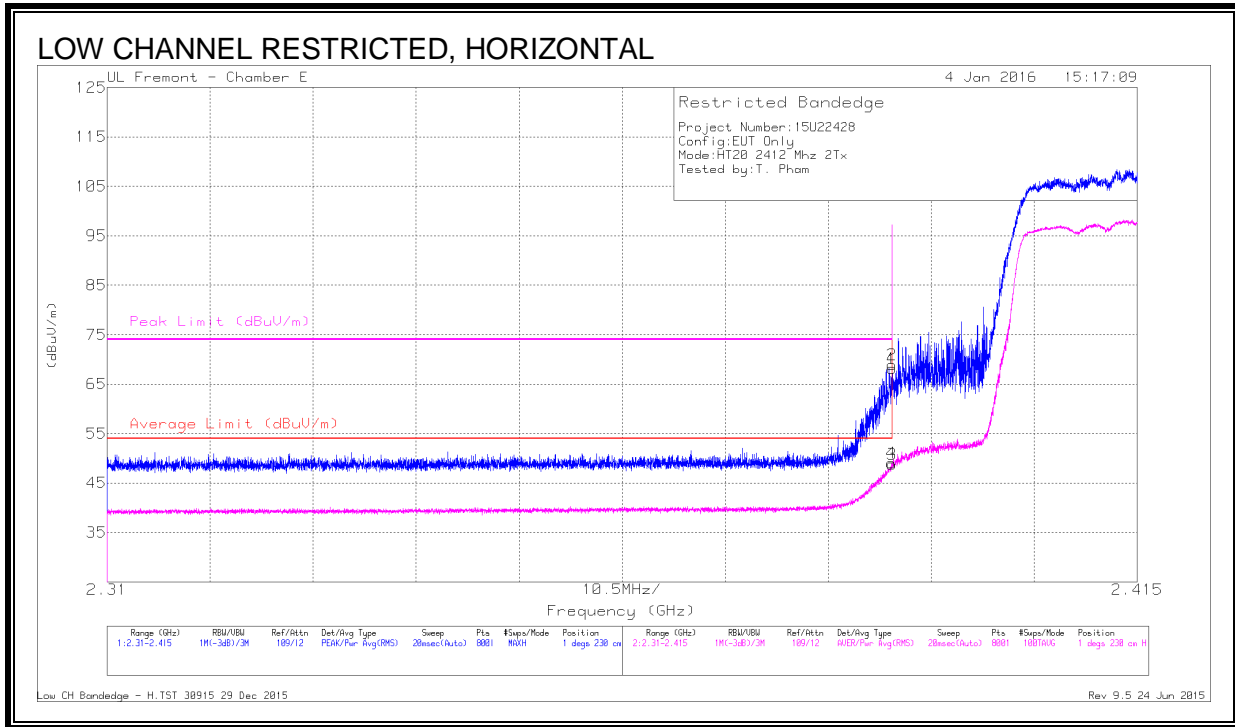


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.97	Pk	32.1	-19.9	68.17	-	-	74	-5.83	1	230	H
2	* 2.39	56.7	Pk	32.1	-19.9	68.9	-	-	74	-5.1	1	230	H
3	* 2.39	36.61	RMS	32.1	-19.9	48.81	54	-5.19	-	-	1	230	H
4	* 2.39	36.81	RMS	32.1	-19.9	49.01	54	-4.99	-	-	1	230	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

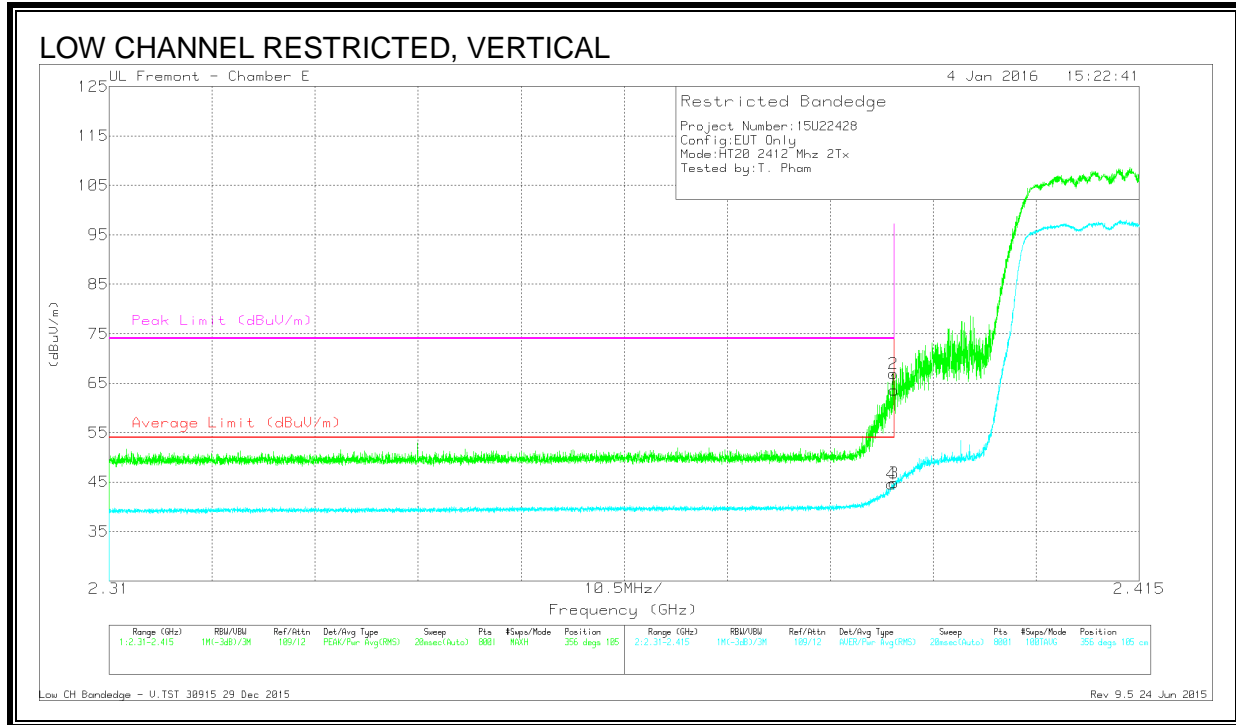

Data


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	51.44	Pk	32.1	-19.9	63.64	-	-	74	-10.36	356	105	V
2	* 2.39	54.72	Pk	32.1	-19.9	66.92	-	-	74	-7.08	356	105	V
3	* 2.39	32.64	RMS	32.1	-19.9	44.84	54	-9.16	-	-	356	105	V
4	* 2.39	32.44	RMS	32.1	-19.9	44.64	54	-9.36	-	-	356	105	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEGE (LOW CHANNEL, CH 2)

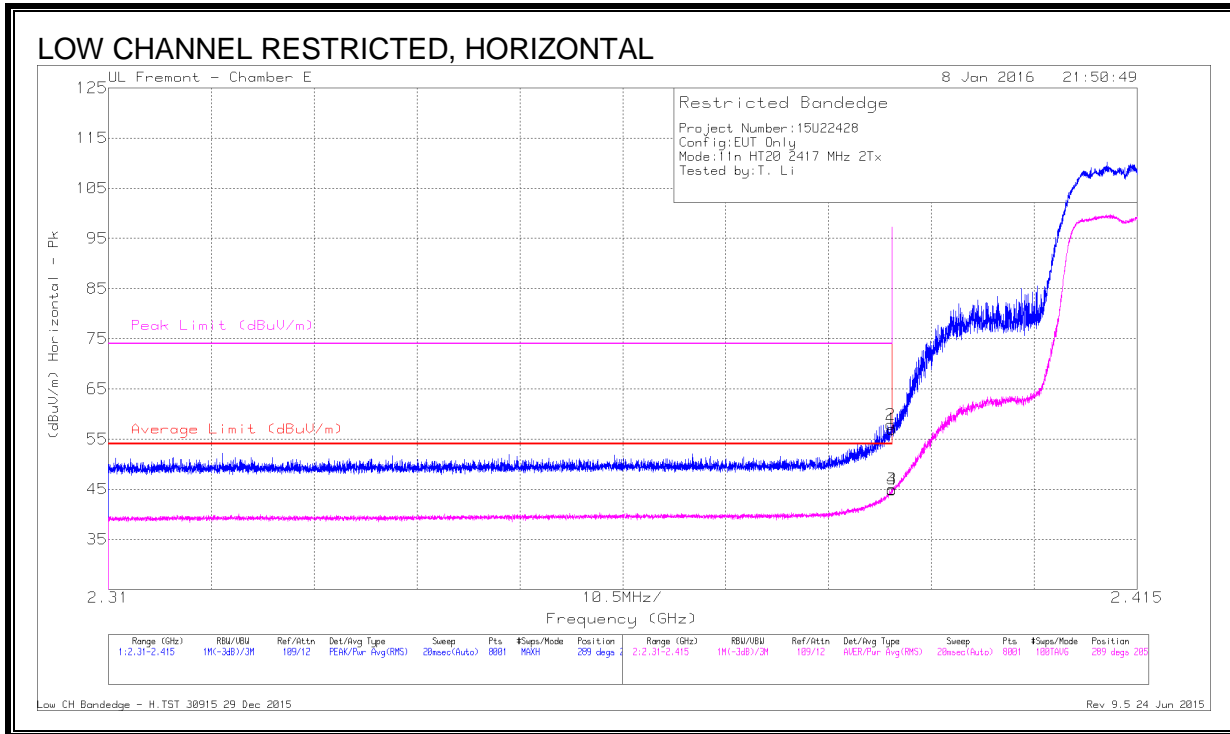

Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44.81	Pk	32.1	-19.9	57.01	-	-	74	-16.99	289	205	H
2	* 2.39	45.7	Pk	32.1	-19.9	57.9	-	-	74	-16.1	289	205	H
3	* 2.39	32.82	RMS	32.1	-19.9	45.02	54	-8.98	-	-	289	205	H
4	* 2.39	32.69	RMS	32.1	-19.9	44.89	54	-9.11	-	-	289	205	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

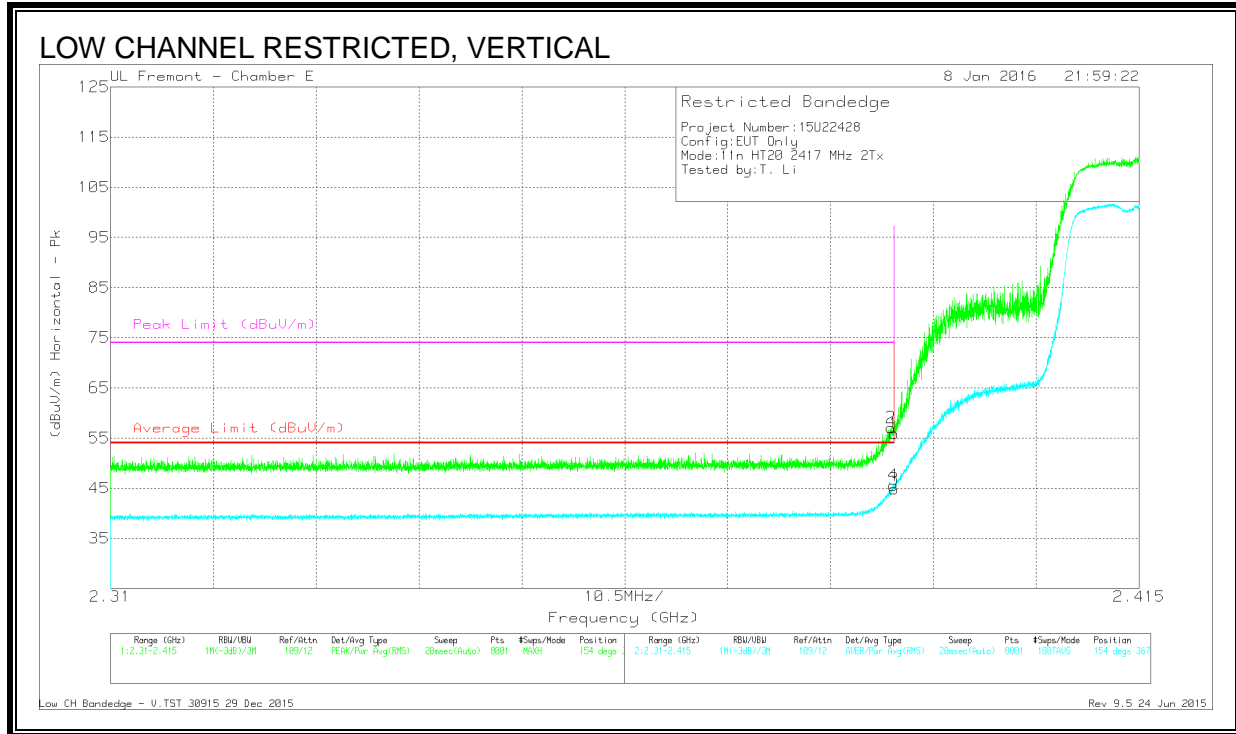


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.7	Pk	32.1	-19.9	55.9	-	-	74	-18.1	154	367	V
2	* 2.39	44.87	Pk	32.1	-19.9	57.07	-	-	74	-16.93	154	367	V
3	* 2.39	32.67	RMS	32.1	-19.9	44.87	54	-9.13	-	-	154	367	V
4	* 2.39	33.41	RMS	32.1	-19.9	45.61	54	-8.39	-	-	154	367	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
 Pk - Peak detector
 RMS - RMS detection


AUTHORIZED BANDEGE (HIGH CHANNEL, CH 10)

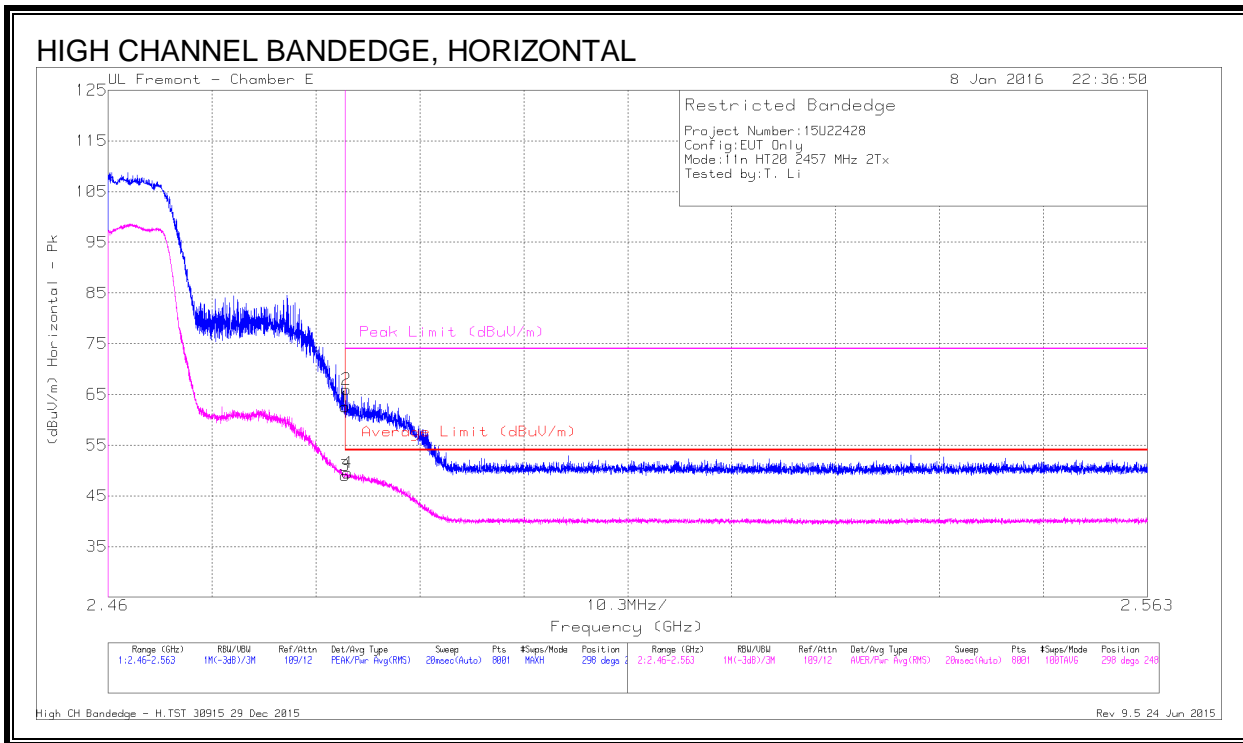

Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.31	Pk	32.2	-20	62.51	-	-	74	-11.49	298	248	H
2	* 2.484	53.78	Pk	32.2	-20	65.98	-	-	74	-8.02	298	248	H
3	* 2.484	36.77	RMS	32.2	-20	48.97	54	-5.03	-	-	298	248	H
4	* 2.484	37.35	RMS	32.2	-20	49.55	54	-4.45	-	-	298	248	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

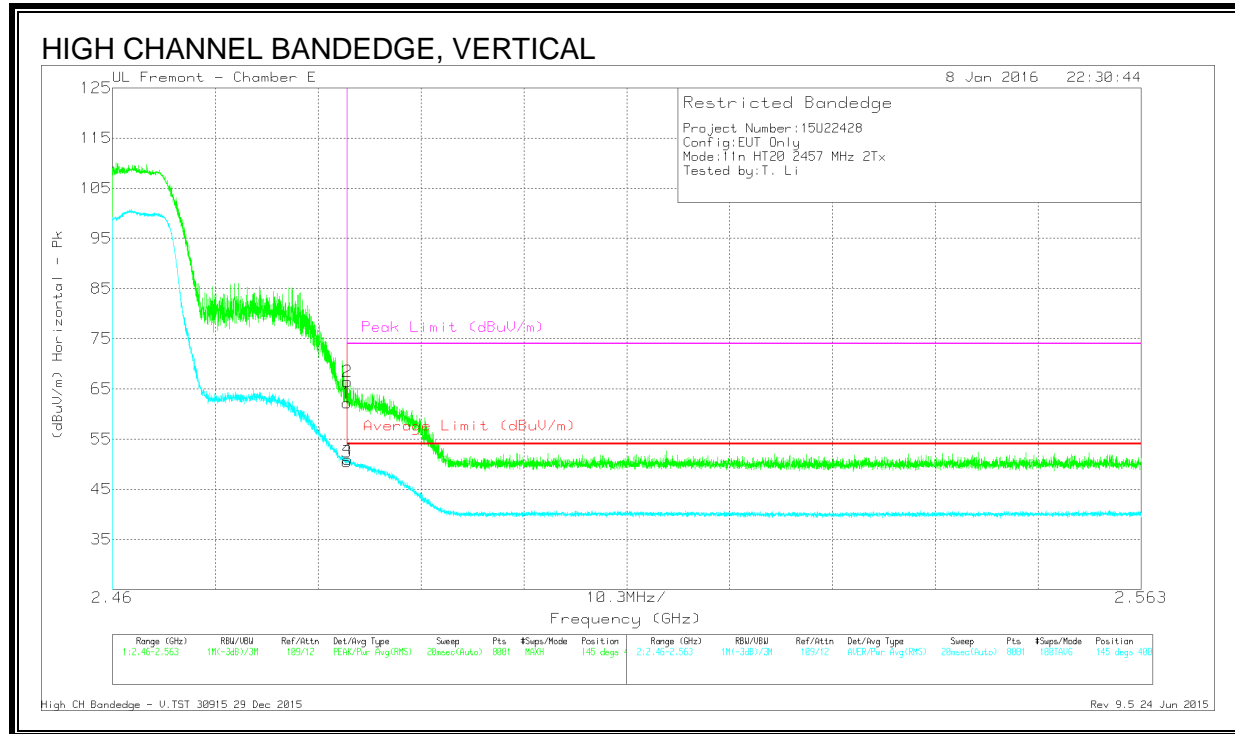


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.01	Pk	32.2	-20	62.21	-	-	74	-11.79	145	400	V
2	* 2.484	54.27	Pk	32.2	-20	66.47	-	-	74	-7.53	145	400	V
3	* 2.484	38.29	RMS	32.2	-20	50.49	54	-3.51	-	-	145	400	V
4	* 2.484	38.79	RMS	32.2	-20	50.99	54	-3.01	-	-	145	400	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector
 RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 11)

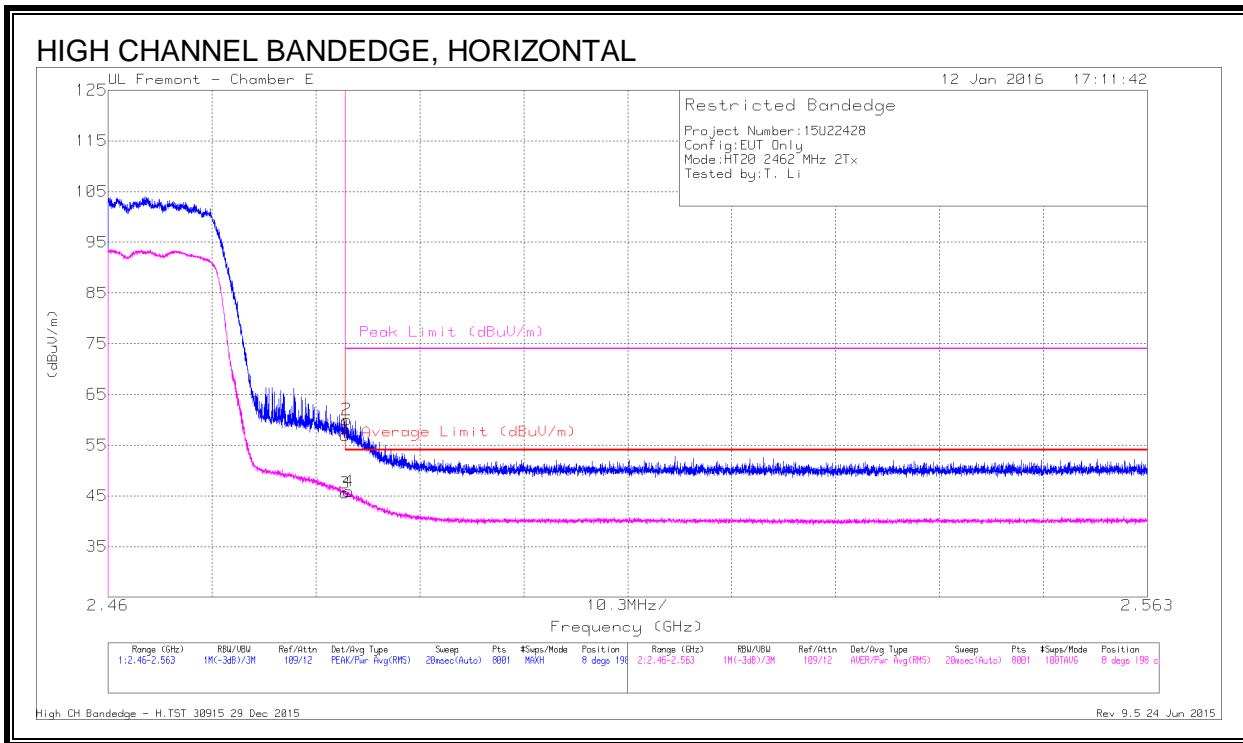


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.8	Pk	32.2	-20	57	-	-	74	-17	8	198	H
2	* 2.484	47.82	Pk	32.2	-20	60.02	-	-	74	-13.98	8	198	H
3	* 2.484	33.37	RMS	32.2	-20	45.57	54	-8.43	-	-	8	198	H
4	* 2.484	33.69	RMS	32.2	-20	45.89	54	-8.11	-	-	8	198	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

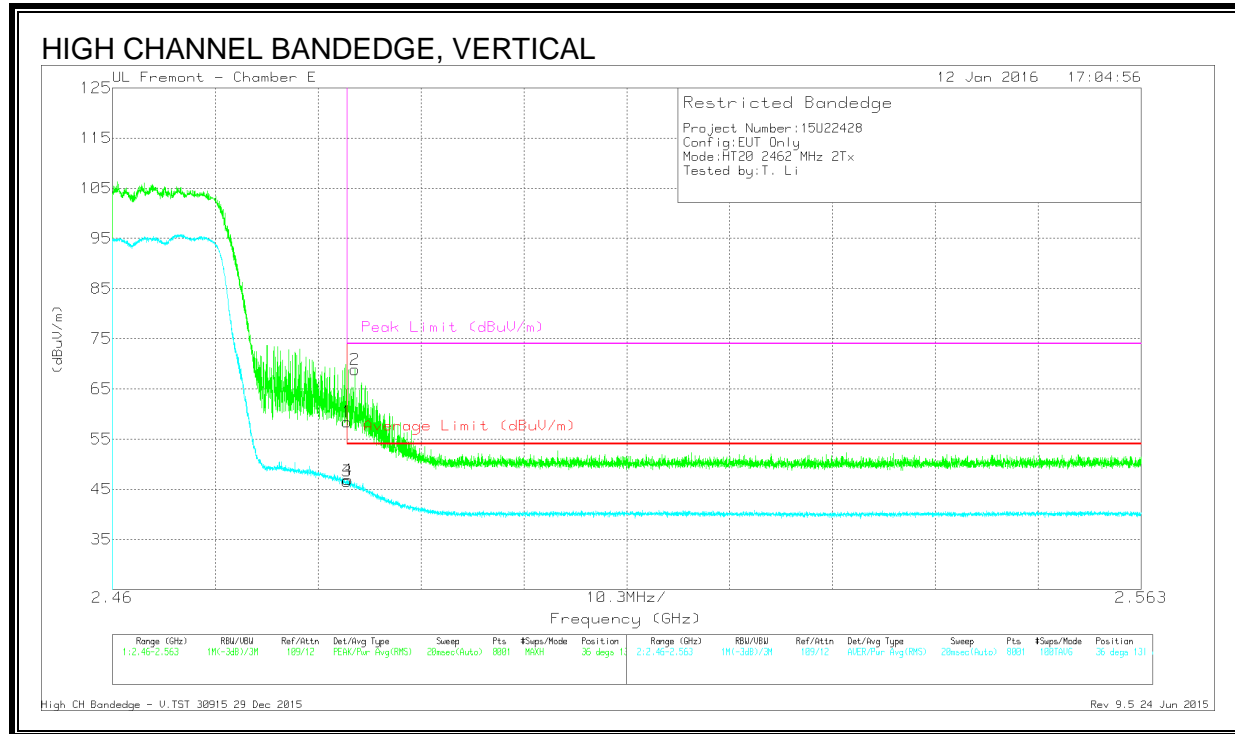

Data


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.22	Pk	32.2	-20	58.42	-	-	74	-15.58	36	131	V
2	* 2.484	56.66	Pk	32.2	-20	68.86	-	-	74	-5.14	36	131	V
3	* 2.484	34.41	RMS	32.2	-20	46.61	54	-7.39	-	-	36	131	V
4	* 2.484	34.7	RMS	32.2	-20	46.9	54	-7.1	-	-	36	131	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 12)

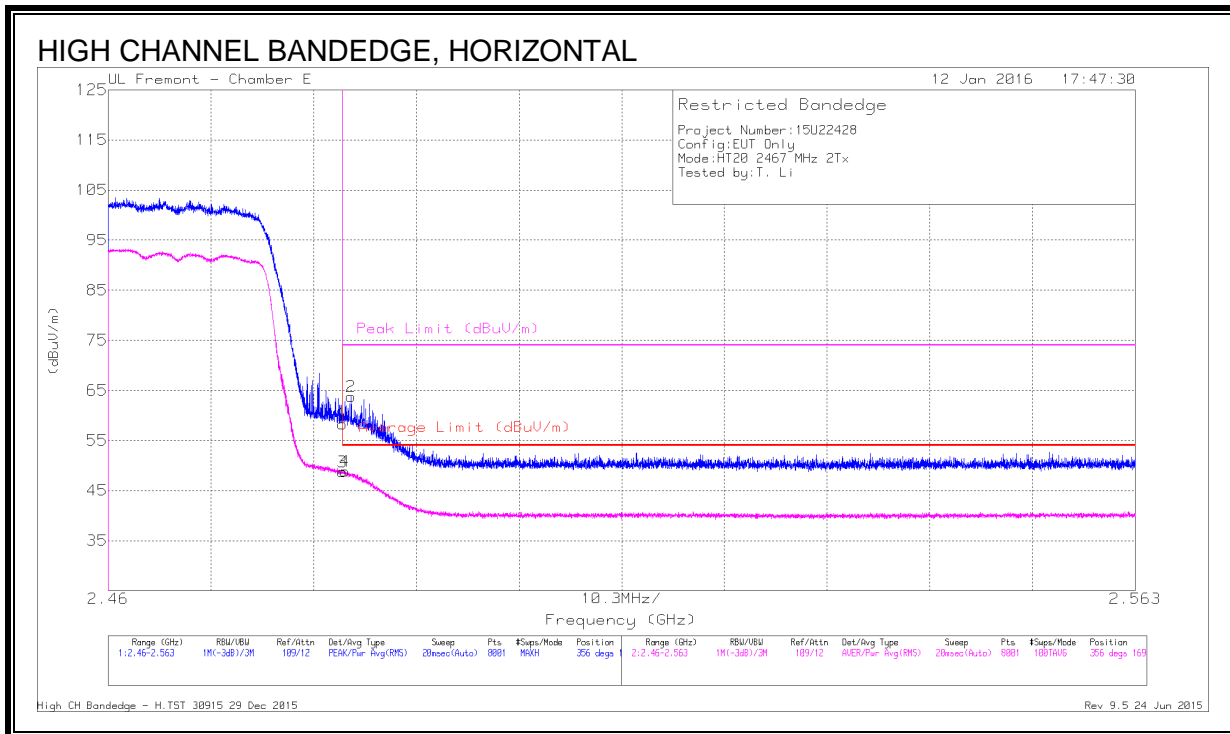


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.11	Pk	32.2	-20	58.31	-	-	74	-15.69	356	169	H
2	* 2.484	51.54	Pk	32.2	-20	63.74	-	-	74	-10.26	356	169	H
3	* 2.484	36.53	RMS	32.2	-20	48.73	54	-5.27	-	-	356	169	H
4	* 2.484	36.64	RMS	32.2	-20	48.84	54	-5.16	-	-	356	169	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

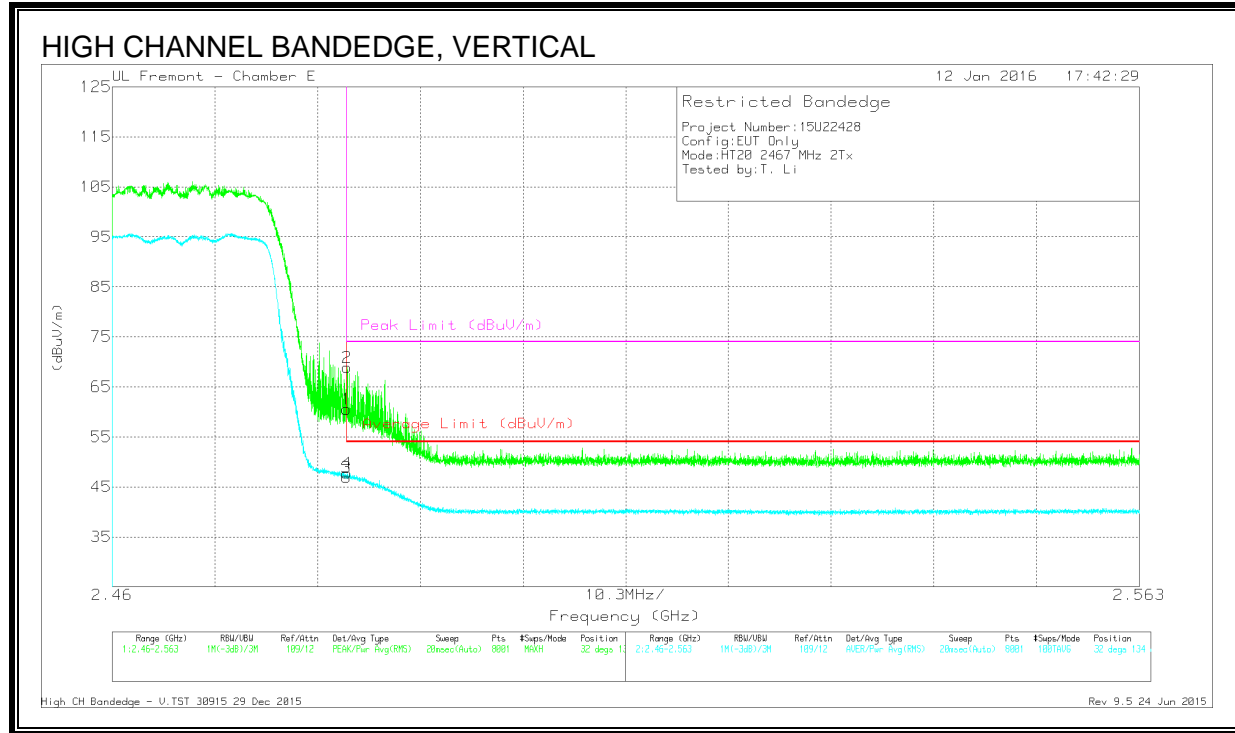

Data


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.35	Pk	32.2	-20	60.55	-	-	74	-13.45	32	134	V
2	* 2.484	56.69	Pk	32.2	-20	68.89	-	-	74	-5.11	32	134	V
3	* 2.484	34.68	RMS	32.2	-20	46.88	54	-7.12	-	-	32	134	V
4	* 2.484	35.54	RMS	32.2	-20	47.74	54	-6.26	-	-	32	134	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL, CH 13)

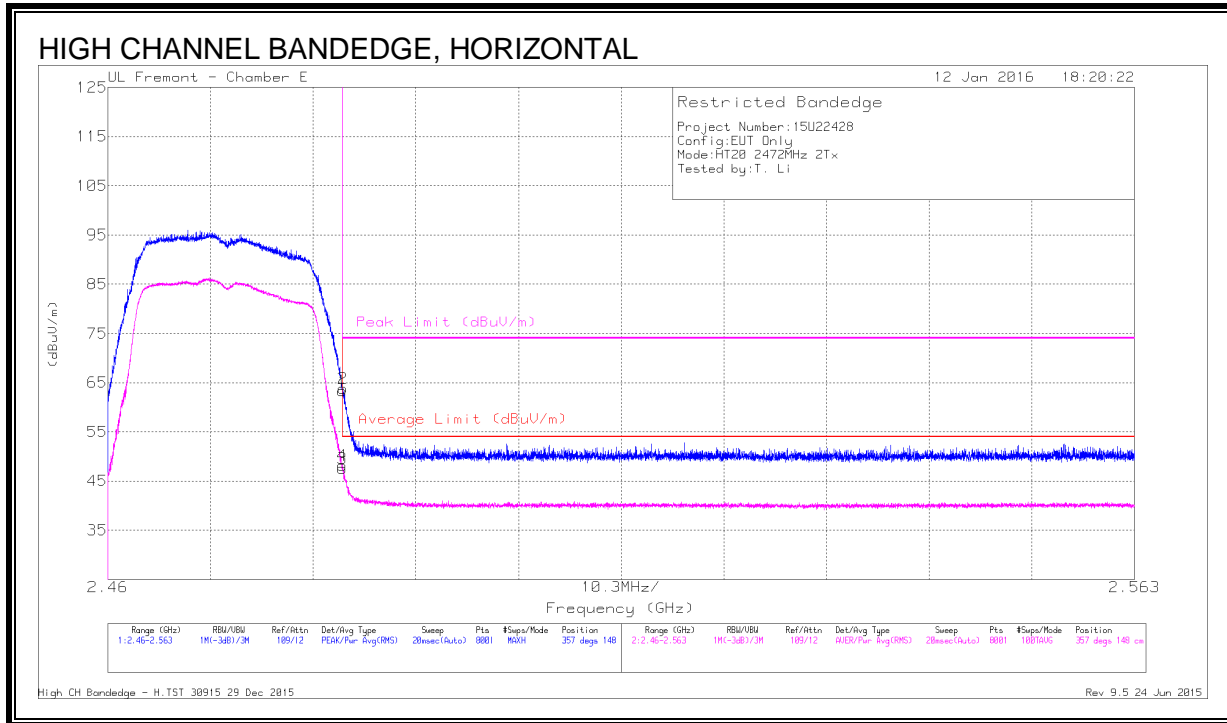


Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.16	Pk	32.2	-20	63.36	-	-	74	-10.64	357	148	H
2	* 2.484	51.67	Pk	32.2	-20	63.87	-	-	74	-10.13	357	148	H
3	* 2.484	35.41	RMS	32.2	-20	47.61	54	-6.39	-	-	357	148	H
4	* 2.484	36.03	RMS	32.2	-20	48.23	54	-5.77	-	-	357	148	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

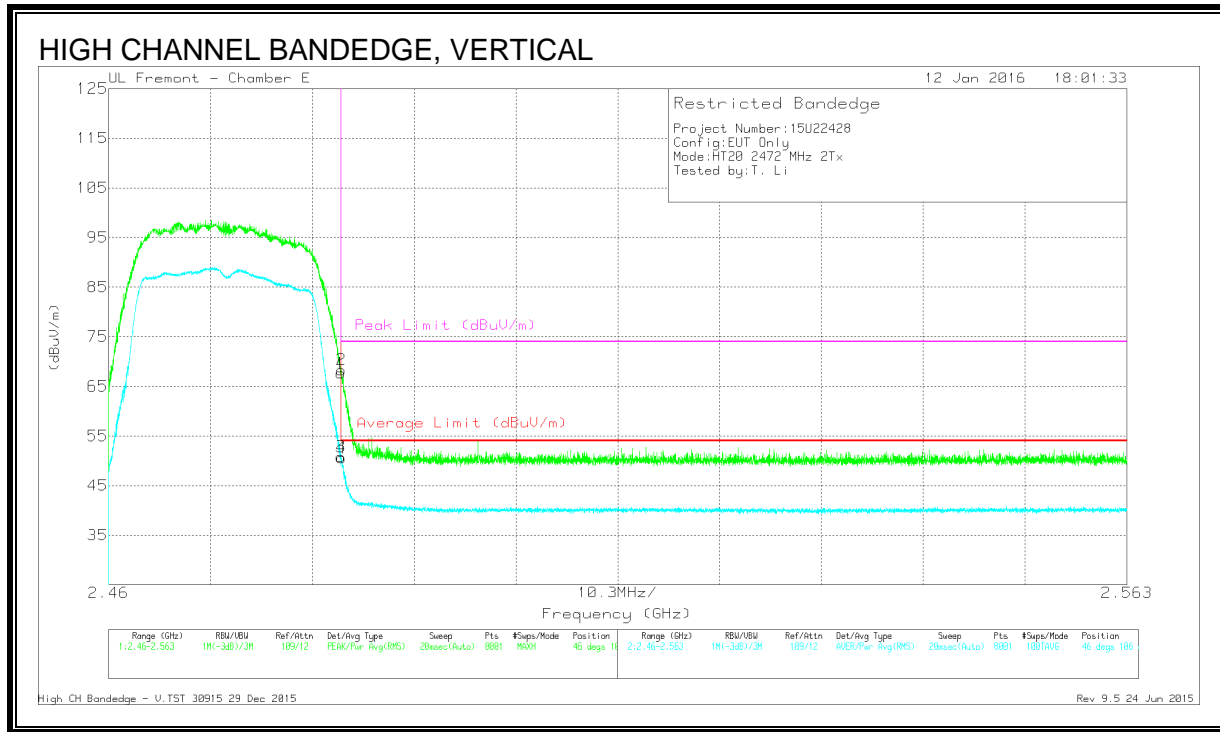

Data



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.47	Pk	32.2	-20	67.67	-	-	74	-6.33	46	106	V
2	* 2.484	56.15	Pk	32.2	-20	68.35	-	-	74	-5.65	46	106	V
3	* 2.484	38.66	RMS	32.2	-20	50.86	54	-3.14	-	-	46	106	V
4	* 2.484	38.42	RMS	32.2	-20	50.62	54	-3.38	-	-	46	106	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL, CH 1

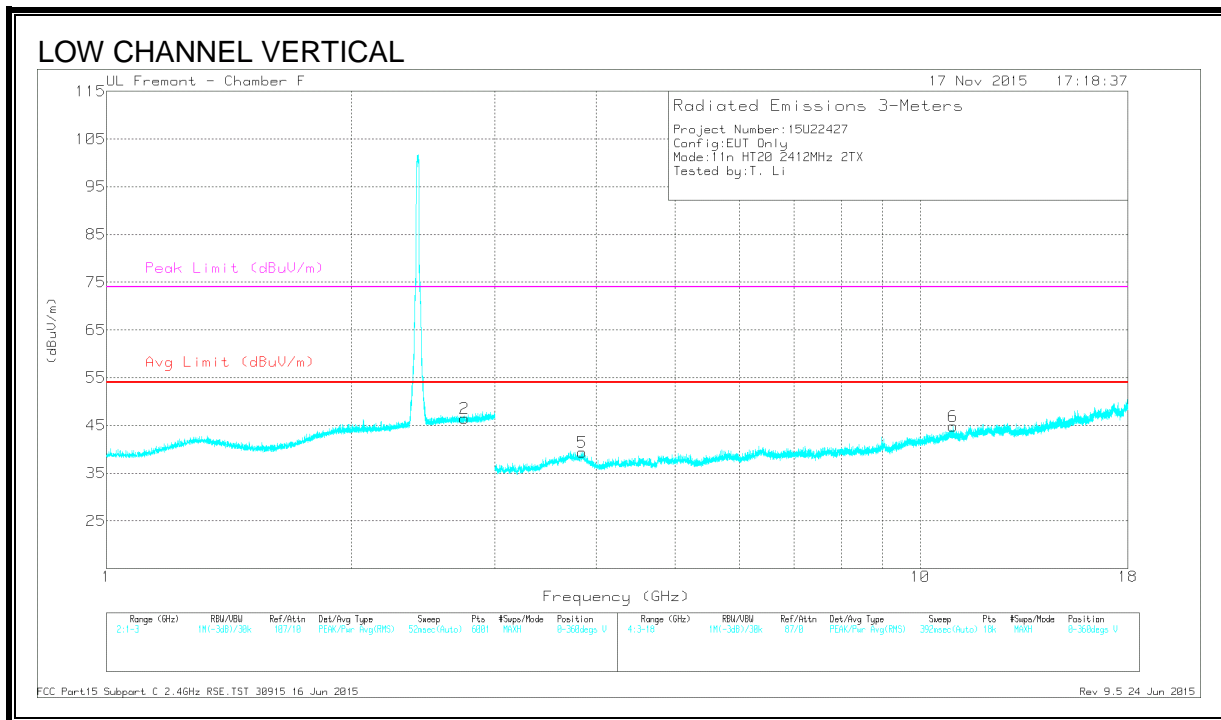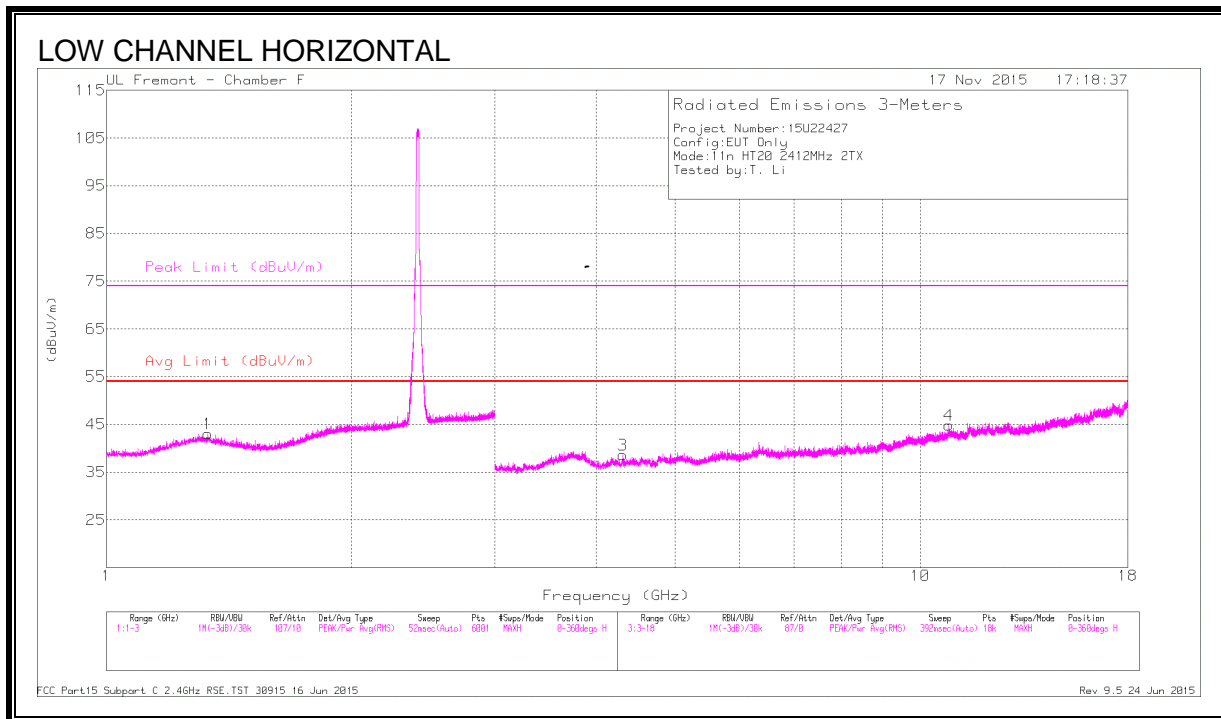

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.331	41.68	PK2	29.8	-22.2	49.28	-	-	74	-24.72	165	267	H
	* 1.331	30.44	MAv1	29.8	-22.2	38.04	54	-15.96	-	-	165	267	H
2	* 2.755	41.85	PK2	32.7	-20.7	53.85	-	-	74	-20.15	101	154	V
	* 2.757	30.18	MAv1	32.7	-20.7	42.18	54	-11.82	-	-	101	154	V
3	* 4.315	38.64	PK2	33.6	-28.9	43.34	-	-	74	-30.66	192	183	H
	* 4.314	27.52	MAv1	33.6	-28.9	32.22	54	-21.78	-	-	192	183	H
4	* 10.854	34.04	PK2	38.1	-21.7	50.44	-	-	74	-23.56	266	307	H
	* 10.853	22.91	MAv1	38.1	-21.7	39.31	54	-14.69	-	-	266	307	H
5	* 3.843	38.99	PK2	34	-28.3	44.69	-	-	74	-29.31	207	228	V
	* 3.841	27.51	MAv1	34	-28.3	33.21	54	-20.79	-	-	207	228	V
6	* 10.968	33.66	PK2	38.1	-21.7	50.06	-	-	74	-23.94	281	189	V
	* 10.968	23.04	MAv1	38.1	-21.7	39.44	54	-14.56	-	-	281	189	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS MID CHANNEL, CH 6

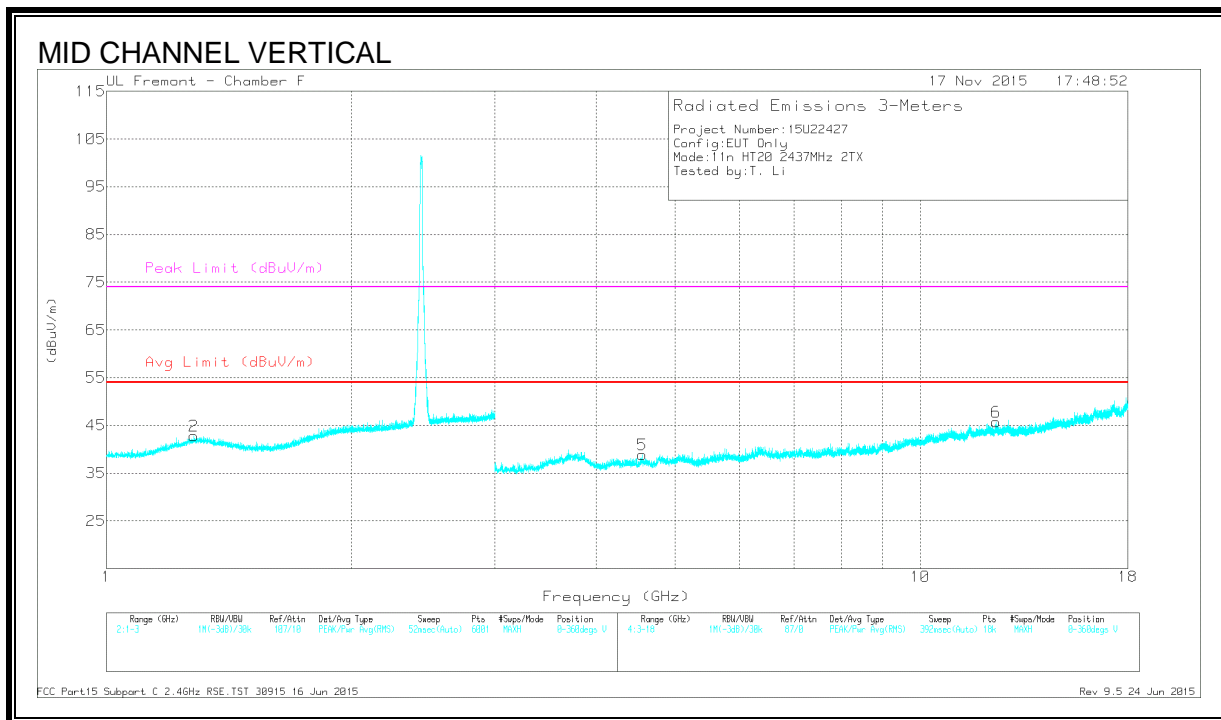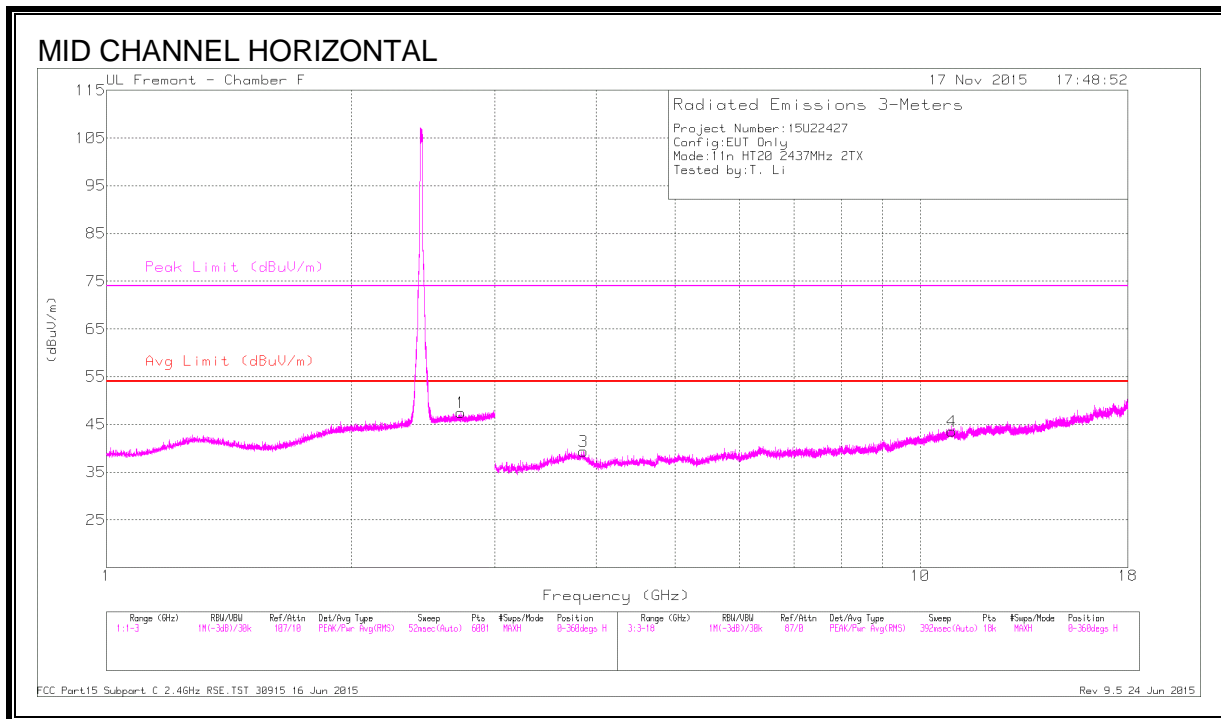

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.726	42.18	PK2	32.7	-20.8	54.08	-	-	74	-19.92	88	203	H
	* 2.728	30.3	MAv1	32.7	-20.8	42.2	54	-11.8	-	-	88	203	H
2	* 1.28	42.26	PK2	29.8	-22.3	49.76	-	-	74	-24.24	176	226	V
	* 1.283	30.6	MAv1	29.8	-22.3	38.1	54	-15.9	-	-	176	226	V
3	* 3.86	39.13	PK2	34	-28.3	44.83	-	-	74	-29.17	226	255	H
	* 3.858	27.98	MAv1	34	-28.3	33.68	54	-20.32	-	-	226	255	H
4	* 10.939	33.79	PK2	38.1	-21.9	49.99	-	-	74	-24.01	181	291	H
	* 10.938	23.06	MAv1	38.1	-21.8	39.36	54	-14.64	-	-	181	291	H
5	* 4.558	38.58	PK2	33.9	-28	44.48	-	-	74	-29.52	289	183	V
	* 4.556	27.1	MAv1	33.9	-28	33	54	-21	-	-	289	183	V
6	* 12.392	35.19	PK2	39.1	-22.4	51.89	-	-	74	-22.11	220	326	V
	* 12.389	24.2	MAv1	39.1	-22.5	40.8	54	-13.2	-	-	220	326	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 11

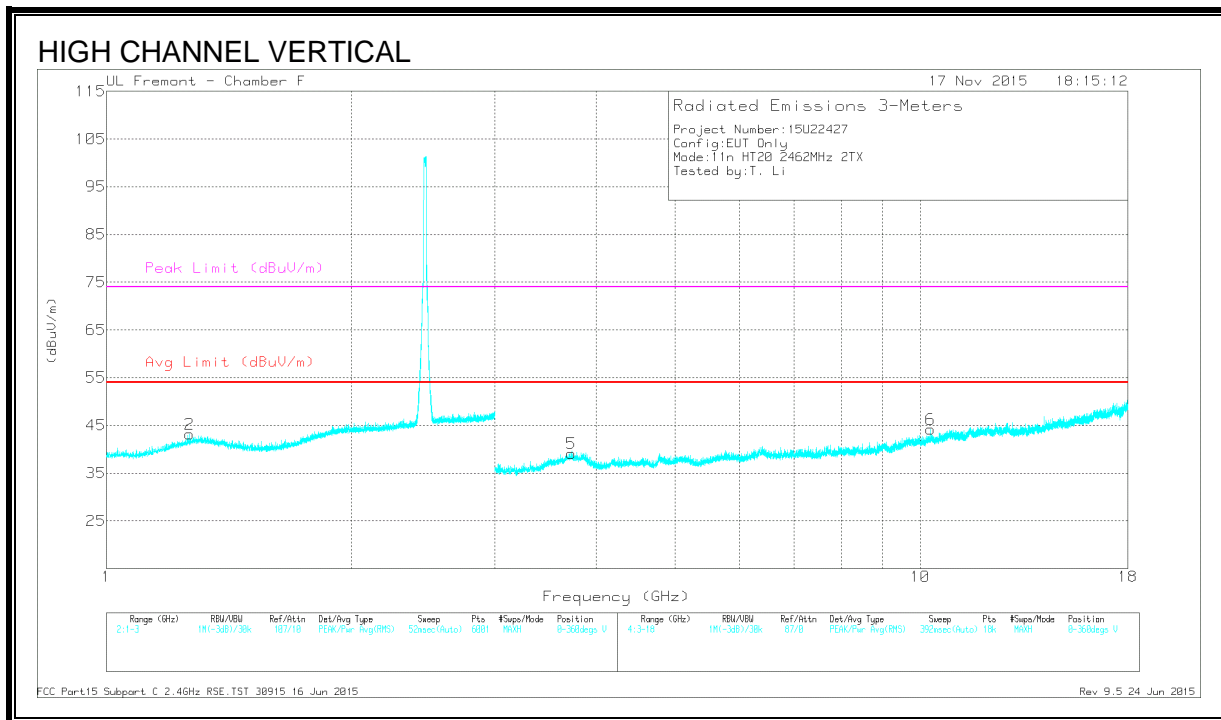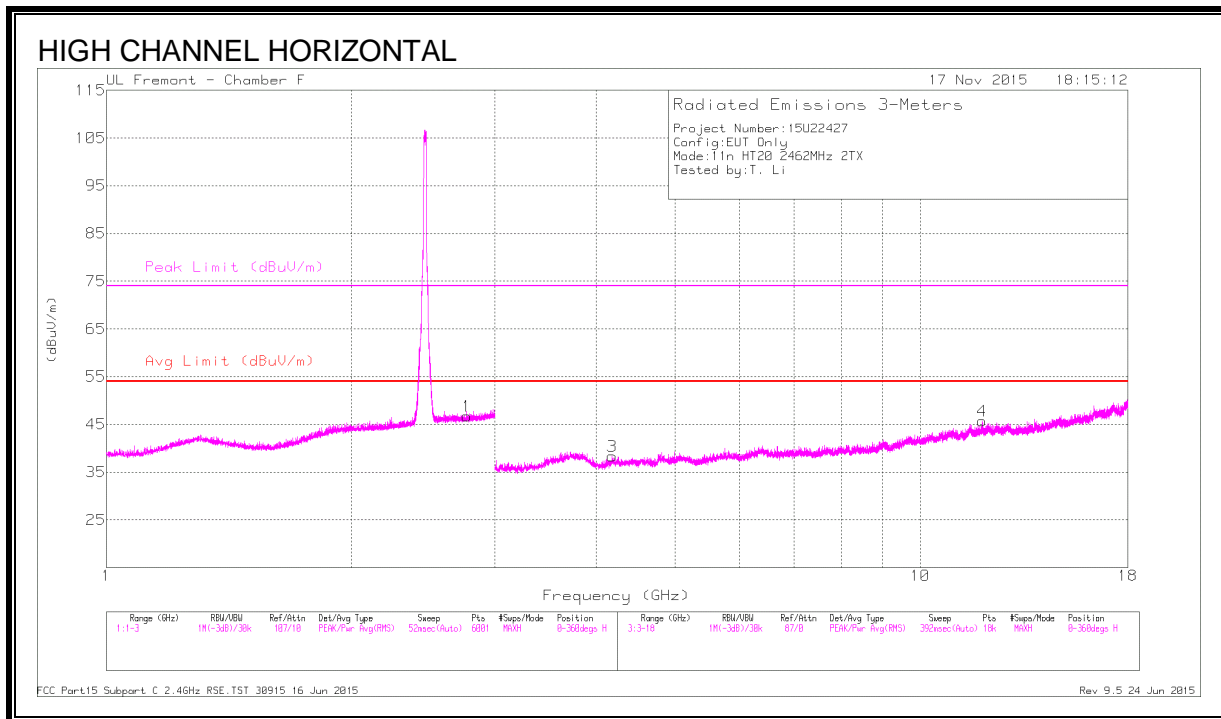

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.774	42.1	PK2	32.7	-20.7	54.1	-	-	74	-19.9	137	280	H
	* 2.774	30.2	MAv1	32.7	-20.7	42.2	54	-11.8	-	-	137	280	H
2	* 1.267	42.03	PK2	29.6	-22.3	49.33	-	-	74	-24.67	119	180	V
	* 1.266	30.68	MAv1	29.6	-22.3	37.98	54	-16.02	-	-	119	180	V
3	* 4.186	38.62	PK2	33.6	-28.4	43.82	-	-	74	-30.18	220	337	H
	* 4.184	27.42	MAv1	33.6	-28.4	32.62	54	-21.38	-	-	220	337	H
4	* 11.926	34.61	PK2	39.1	-22.2	51.51	-	-	74	-22.49	0	136	H
	* 11.924	23.53	MAv1	39.1	-22.2	40.43	54	-13.57	-	-	0	136	H
5	* 3.729	39.29	PK2	34.5	-29.4	44.39	-	-	74	-29.61	128	203	H
	* 3.729	28.14	MAv1	34.5	-29.4	33.24	54	-20.76	-	-	128	203	H
6	10.303	34.05	PK2	37.3	-21.8	49.55	-	-	-	-	260	357	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 12

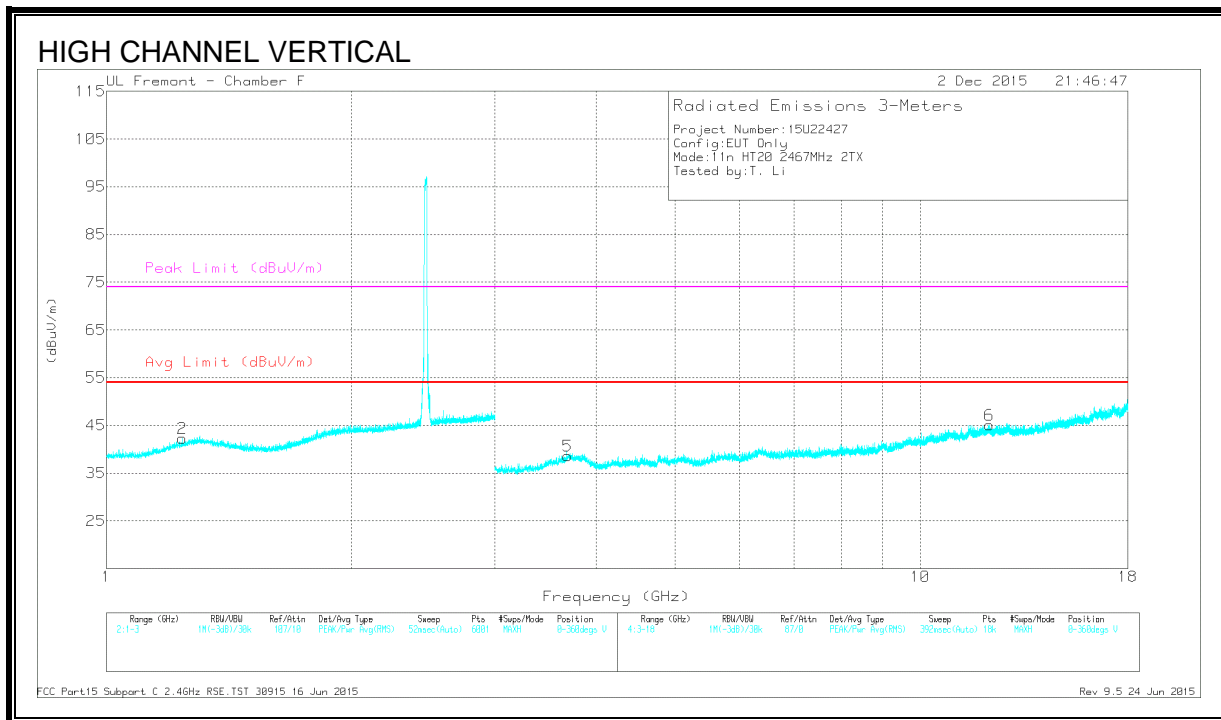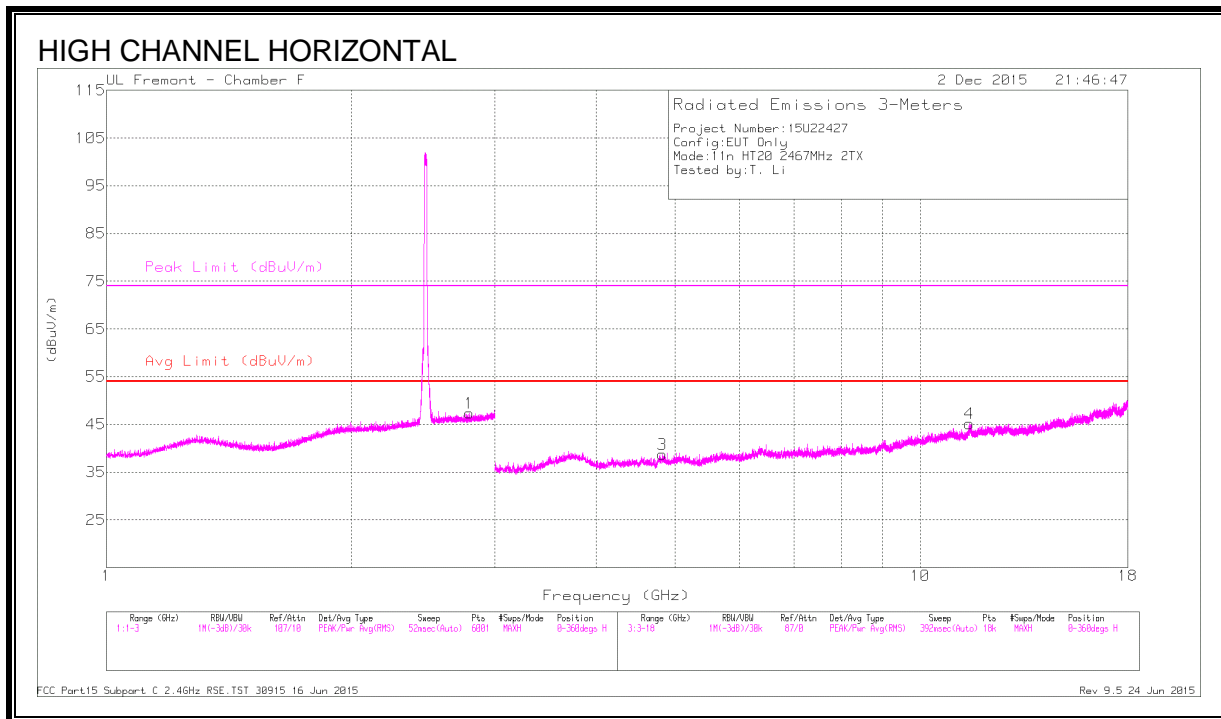

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.796	41.8	PK2	32.7	-20.6	53.9	-	-	74	-20.1	98	107	H
	* 2.794	30.3	MAv1	32.7	-20.6	42.4	54	-11.6	-	-	98	107	H
2	* 1.238	42.18	PK2	29.3	-22.4	49.08	-	-	74	-24.92	165	341	V
	* 1.239	30.56	MAv1	29.3	-22.4	37.46	54	-16.54	-	-	165	341	V
3	* 4.821	38.24	PK2	34.1	-27.3	45.04	-	-	74	-28.96	206	297	H
	* 4.822	26.84	MAv1	34.1	-27.3	33.64	54	-20.36	-	-	206	297	H
4	* 11.504	33.94	PK2	38.6	-21.3	51.24	-	-	74	-22.76	111	273	H
	* 11.504	23.08	MAv1	38.6	-21.3	40.38	54	-13.62	-	-	111	273	H
5	* 3.688	39.06	PK2	34.7	-29.4	44.36	-	-	74	-29.64	81	171	V
	* 3.689	28.02	MAv1	34.7	-29.4	33.32	54	-20.68	-	-	81	171	V
6	* 12.16	34.97	PK2	39	-21.9	52.07	-	-	74	-21.93	244	310	V
	* 12.163	23.5	MAv1	39	-22	40.5	54	-13.5	-	-	244	310	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL, CH 13

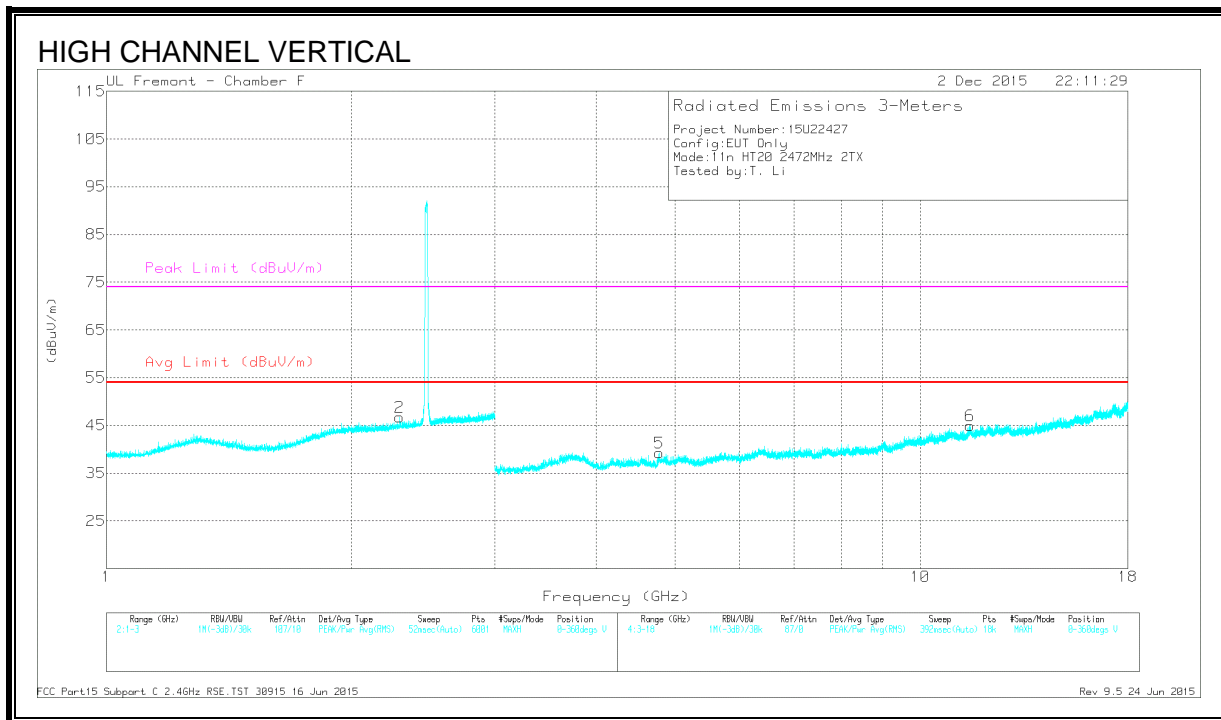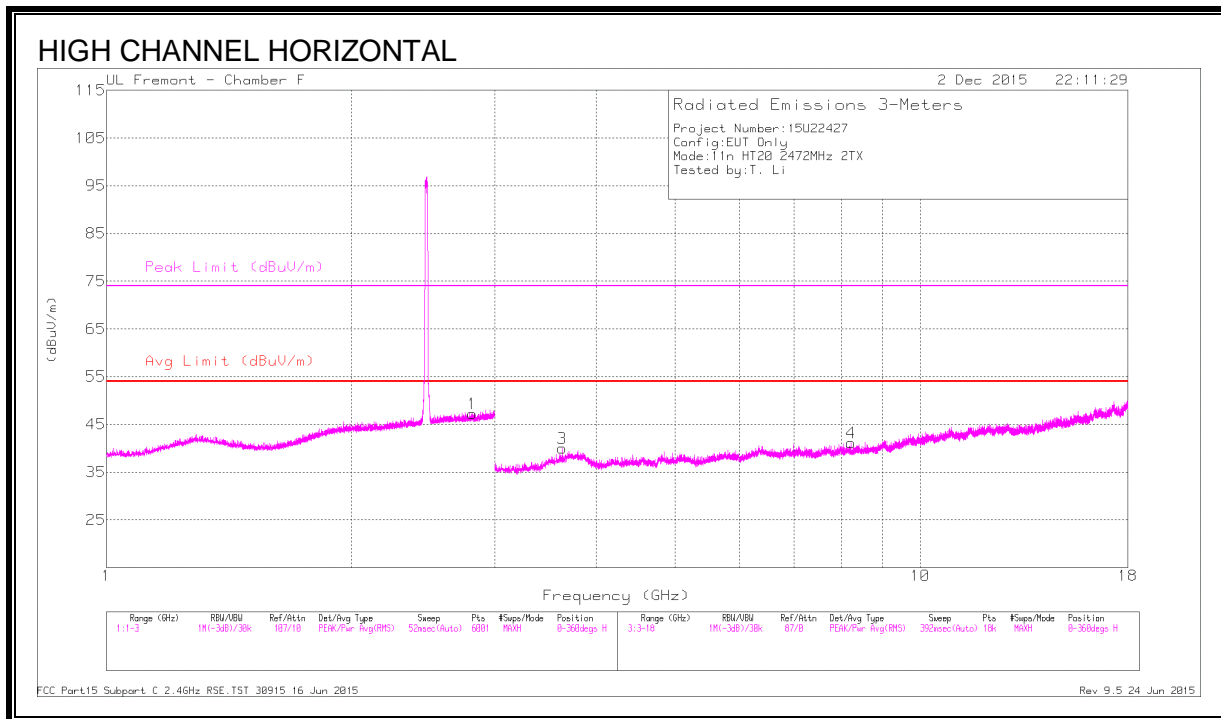

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.817	41.91	PK2	32.7	-20.4	54.21	-	-	74	-19.79	139	146	H
	* 2.817	30.22	MAv1	32.7	-20.4	42.52	54	-11.48	-	-	139	146	H
2	* 2.29	42.25	PK2	31.8	-21.1	52.95	-	-	74	-21.05	172	288	V
	* 2.29	30.3	MAv1	31.8	-21.1	41	54	-13	-	-	172	288	V
3	* 3.634	38.7	PK2	34.9	-29.2	44.4	-	-	74	-29.6	268	240	H
	* 3.632	27.67	MAv1	34.9	-29.3	33.27	54	-20.73	-	-	268	240	H
4	* 8.228	36.54	PK2	35.8	-25.3	47.04	-	-	74	-26.96	120	164	H
	* 8.227	25.14	MAv1	35.8	-25.3	35.64	54	-18.36	-	-	120	164	H
5	* 4.778	39.04	PK2	34.1	-28.1	45.04	-	-	74	-28.96	313	264	V
	* 4.776	28.02	MAv1	34.1	-28.1	34.02	54	-19.98	-	-	313	264	V
6	* 11.524	34.43	PK2	38.6	-21.2	51.83	-	-	74	-22.17	189	312	V
	* 11.523	23.13	MAv1	38.6	-21.2	40.53	54	-13.47	-	-	189	312	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

9.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

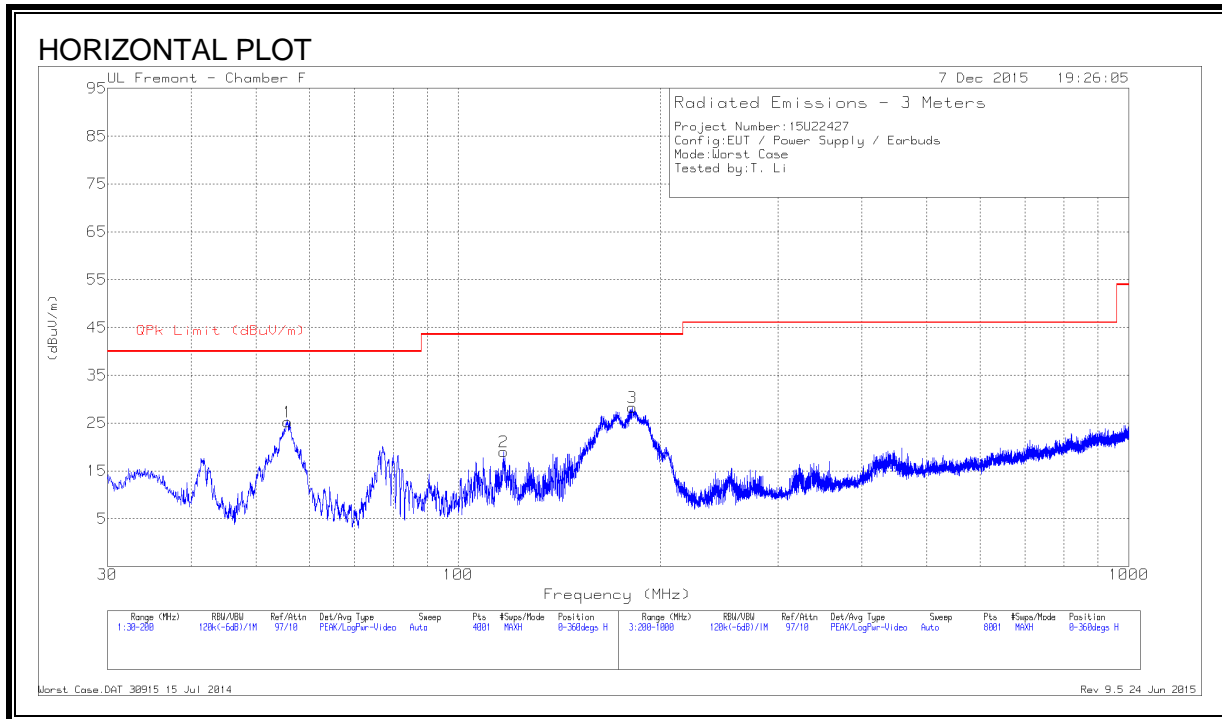

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

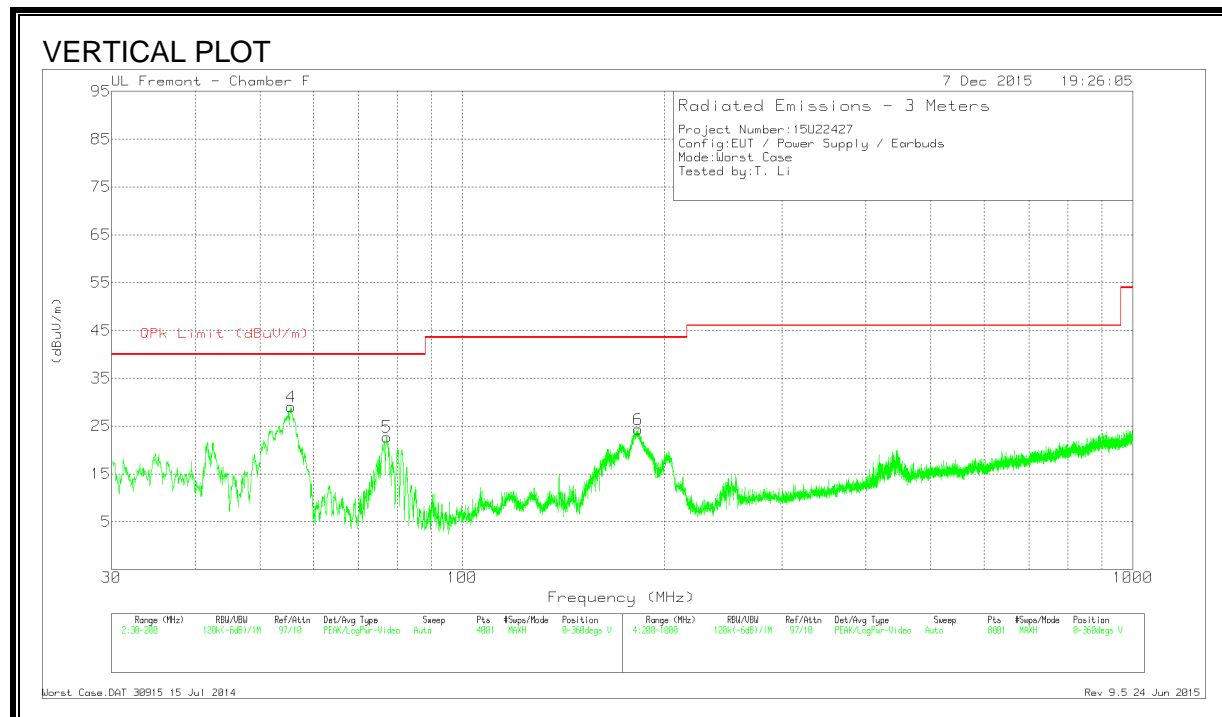

DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T122 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	55.67	49.57	Pk	7.3	-31.6	25.27	40	-14.73	0-360	400	H
2	* 116.87	36.54	Pk	13.6	-31.1	19.04	43.52	-24.48	0-360	201	H
3	181.81	47.78	Pk	11.2	-30.7	28.28	43.52	-15.24	0-360	101	H
4	55.5425	53.28	Pk	7.3	-31.6	28.98	40	-11.02	0-360	100	V
5	77.2175	45.94	Pk	8.2	-31.4	22.74	40	-17.26	0-360	100	V
6	183	43.85	Pk	11.2	-30.7	24.35	43.52	-19.17	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

9.4. WORST-CASE 18 to 26 GHz

SPURIOUS EMISSIONS 18 TO 26 GHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

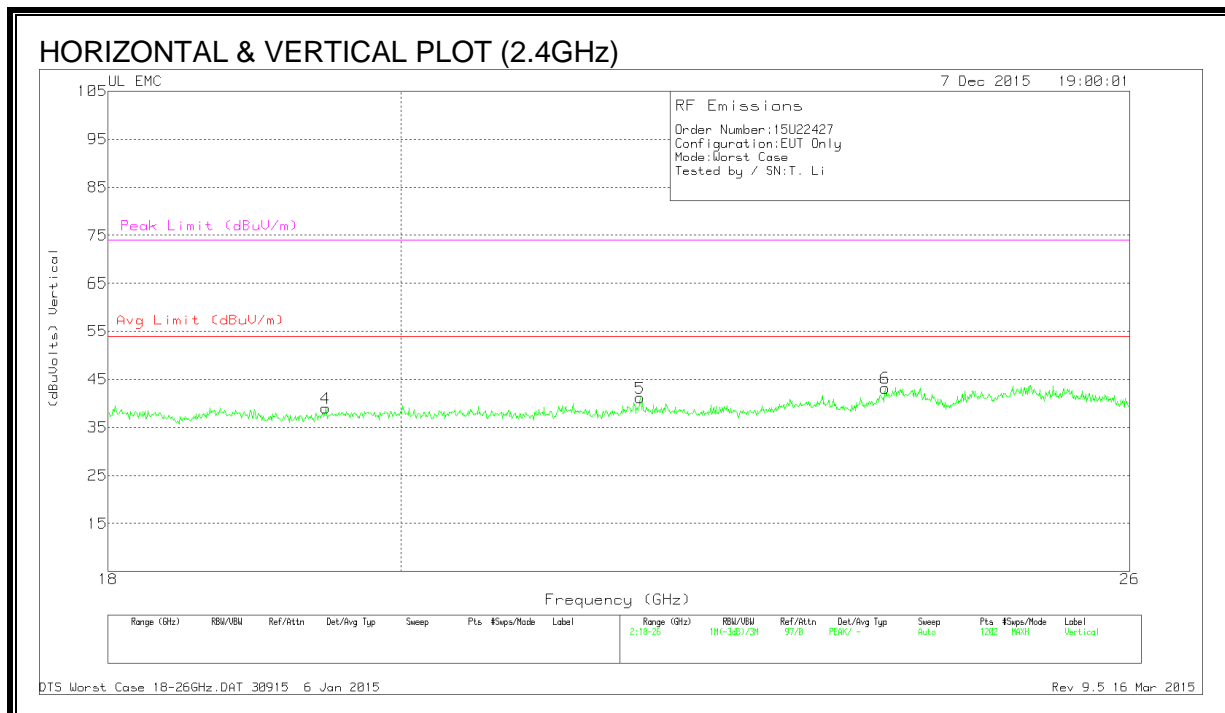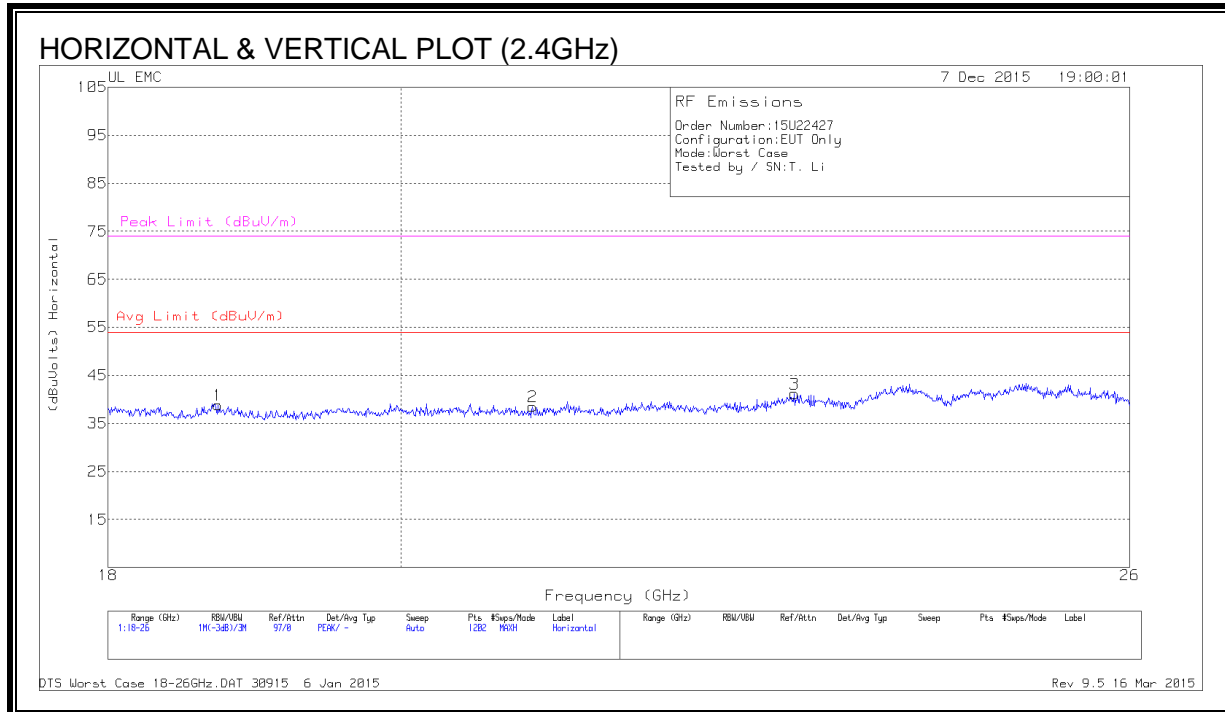

HORIZONTAL & VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T89 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.726	40.53	Pk	32.5	-24.7	-9.5	38.83	54	-15.17	74	-35.17
2	20.971	41.2	Pk	32.4	-25.6	-9.5	38.5	54	-15.5	74	-35.5
3	23.042	42.17	Pk	33.6	-25.1	-9.5	41.17	54	-12.837	74	-32.83
4	19.465	40.7	Pk	32.5	-24.7	-9.5	39	54	-15	74	-35
5	21.797	41.97	Pk	33.3	-24.6	-9.5	41.17	54	-12.83	74	-32.83
6	23.808	42.97	Pk	33.7	-24	-9.5	43.17	54	-10.83	74	-30.83

Pk - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

10.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE

LINE 1 RESULTS

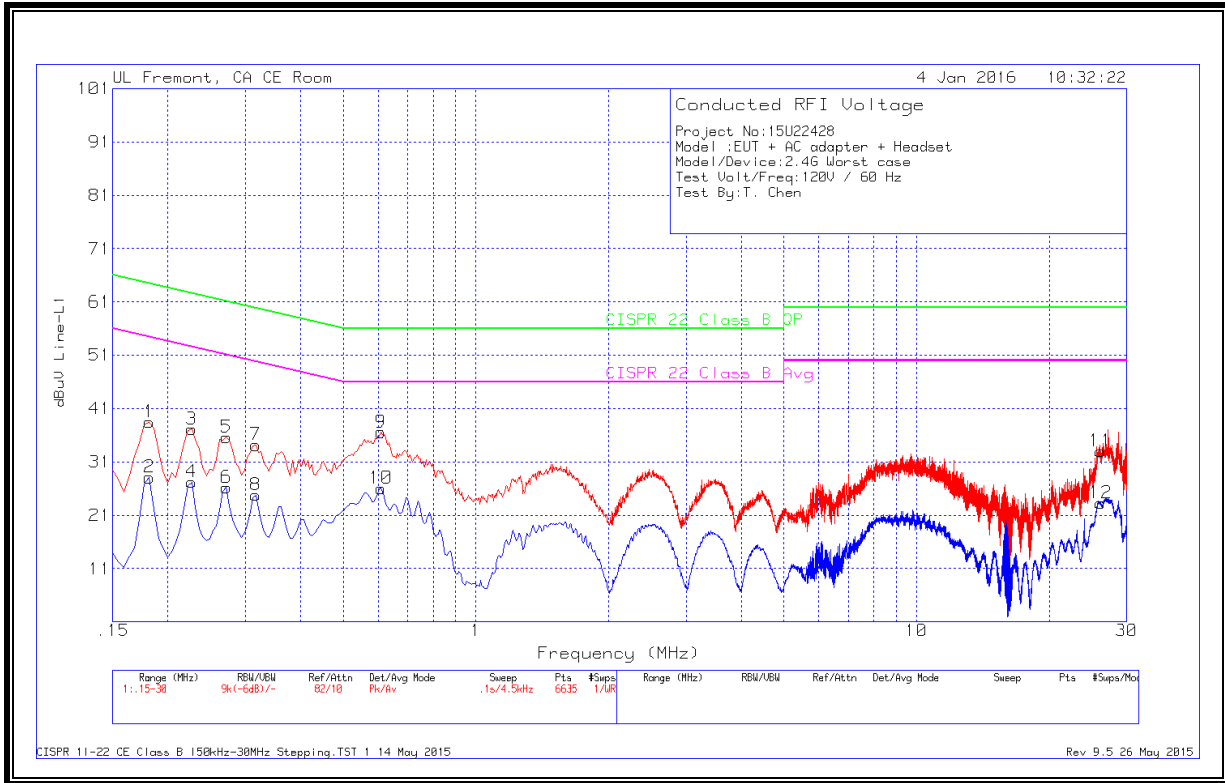


WORST EMISSIONS DATA

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	.1815	37.34	Pk	1.1	0	38.44	64.42	-25.98	-	-
2	.1815	26.99	Av	1.1	0	28.09	-	-	54.42	-26.33
3	.2265	36.32	Pk	.8	0	37.12	62.58	-25.46	-	-
4	.2265	26.4	Av	.8	0	27.2	-	-	52.58	-25.38
5	.2715	35.01	Pk	.6	0	35.61	61.07	-25.46	-	-
6	.2715	25.59	Av	.6	0	26.19	-	-	51.07	-24.88
7	.3165	33.65	Pk	.5	0	34.15	59.8	-25.65	-	-
8	.3165	24.29	Av	.5	0	24.79	-	-	49.8	-25.01
9	.609	36.26	Pk	.3	0	36.56	56	-19.44	-	-
10	.609	25.76	Av	.3	0	26.06	-	-	46	-19.94
11	26.1645	32.39	Pk	.3	.3	32.99	60	-27.01	-	-
12	26.1825	22.68	Av	.3	.3	23.28	-	-	50	-26.72

Pk - Peak detector
 Av - Average detection

LINE 2 RESULTS

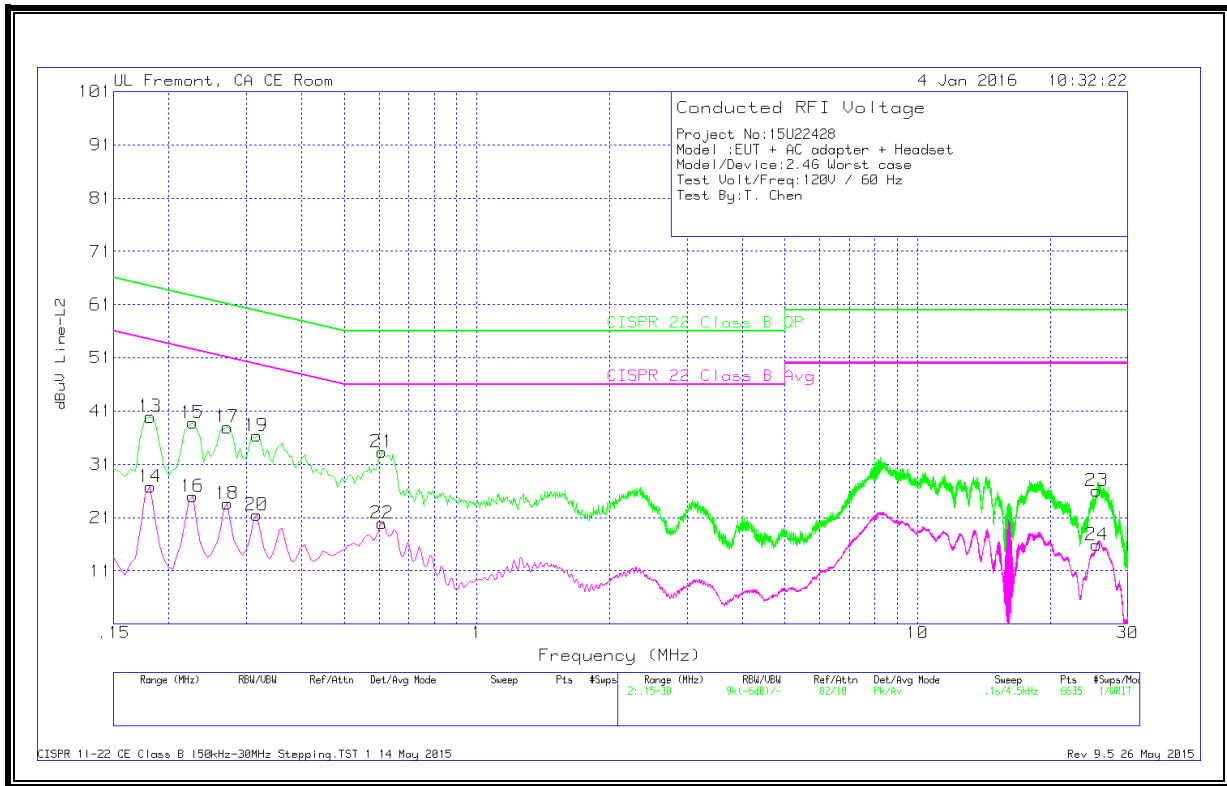


WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
13	.1815	38.74	Pk	1.2	0	39.94	64.42	-24.48	-	-
14	.1815	25.6	Av	1.2	0	26.8	-	-	54.42	-27.62
15	.2265	37.93	Pk	.9	0	38.83	62.58	-23.75	-	-
16	.2265	24.1	Av	.9	0	25	-	-	52.58	-27.58
17	.2715	37.25	Pk	.7	0	37.95	61.07	-23.12	-	-
18	.2715	22.92	Av	.7	0	23.62	-	-	51.07	-27.45
19	.3165	35.78	Pk	.6	0	36.38	59.8	-23.42	-	-
20	.3165	20.89	Av	.6	0	21.49	-	-	49.8	-28.31
21	.609	33.05	Pk	.3	0	33.35	56	-22.65	-	-
22	.609	19.61	Av	.3	0	19.91	-	-	46	-26.09
23	25.494	25.47	Pk	.3	.3	26.07	60	-33.93	-	-
24	25.5165	15.27	Av	.3	.3	15.87	-	-	50	-34.13

Pk - Peak detector
 Av - Average detection

10.2. EUT POWERED BY HOST PC VIA USB CABLE

LINE 1 RESULTS

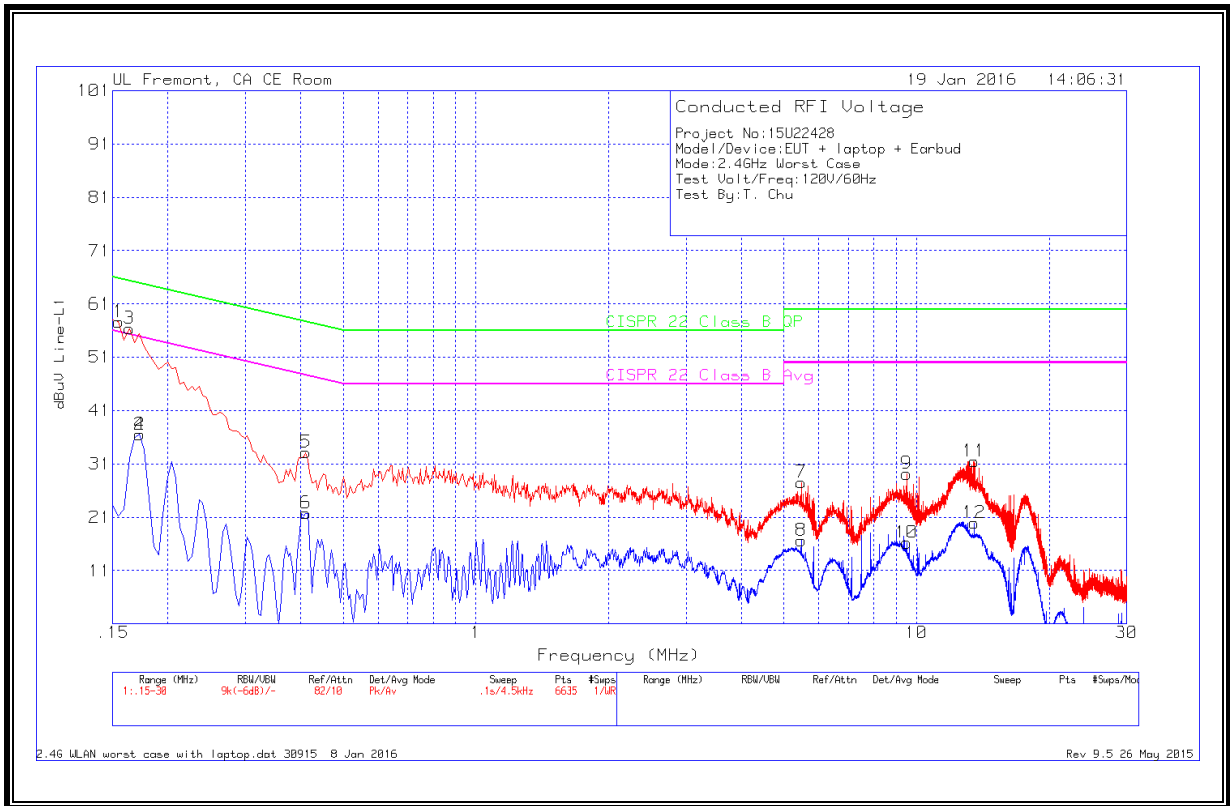


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T1310 IL L1	LC Cables 1&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	.1545	57.67	Pk	0	0	57.67	65.75	-8.08	-	-
2	.1725	36.52	Av	0	0	36.52	-	-	54.84	-18.32
3	.1635	56.4	Pk	0	0	56.4	65.28	-8.88	-	-
4	.1725	36.52	Av	0	0	36.52	-	-	54.84	-18.32
5	.411	33.16	Pk	0	0	33.16	57.63	-24.47	-	-
6	.411	21.74	Av	0	0	21.74	-	-	47.63	-25.89
7	5.4735	27.42	Pk	0	.1	27.52	60	-32.48	-	-
8	5.4735	16.54	Av	0	.1	16.64	-	-	50	-33.36
9	9.492	29.04	Pk	0	.1	29.14	60	-30.86	-	-
10	9.4965	16.11	Av	0	.1	16.21	-	-	50	-33.79
11	13.524	31.14	Pk	.1	.2	31.44	60	-28.56	-	-
12	13.524	19.6	Av	.1	.2	19.9	-	-	50	-30.1

Pk - Peak detector
 Av - Average detection

LINE 2 RESULTS

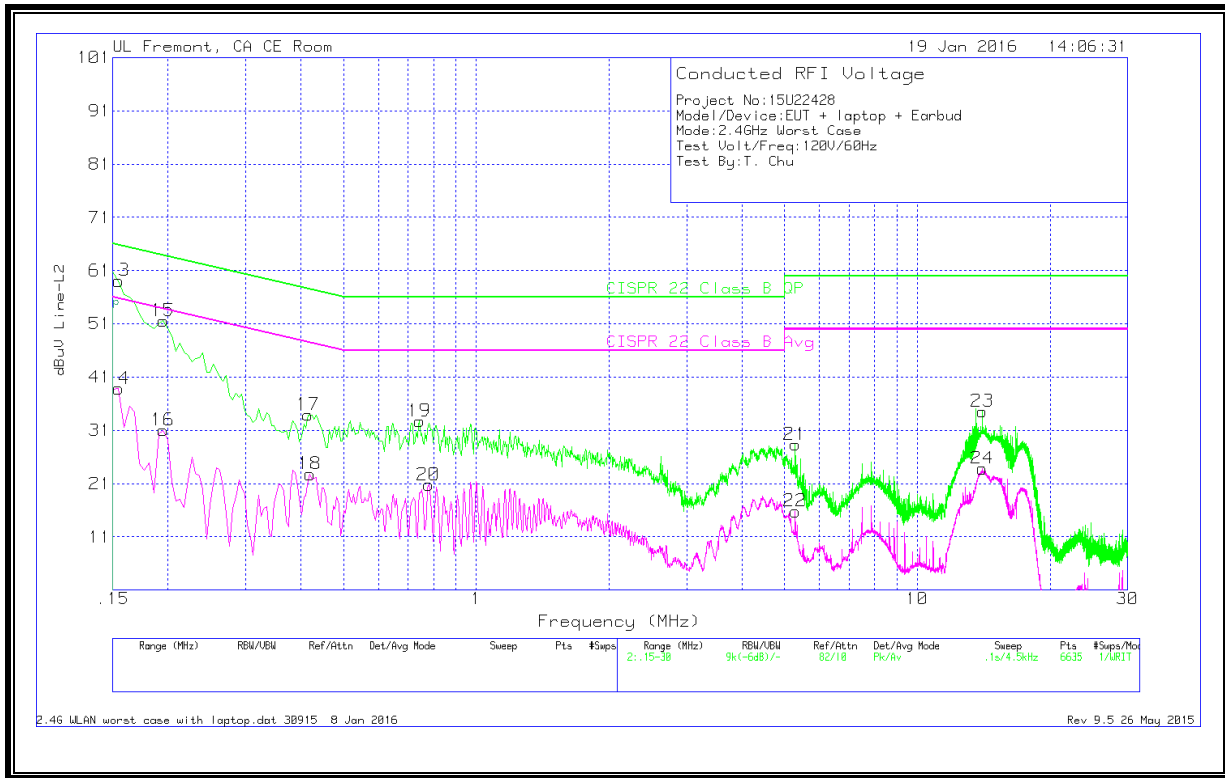

WORST EMISSIONS

Range 2: Line=L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T1310 IL L2	LC Cables 2&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
13	.1545	59.08	Pk	0	0	59.08	65.75	-6.67	-	-
14	.1545	38.84	Av	0	0	38.84	-	-	55.75	-16.91
15	.195	51.56	Pk	0	0	51.56	63.82	-12.26	-	-
16	.195	30.98	Av	0	0	30.98	-	-	53.82	-22.84
17	.4155	33.91	Pk	0	0	33.91	57.54	-23.63	-	-
18	.42	22.75	Av	0	0	22.75	-	-	47.45	-24.7
19	.744	32.74	Pk	0	0	32.74	56	-23.26	-	-
20	.78	20.76	Av	0	0	20.76	-	-	46	-25.24
21	5.289	28.25	Pk	0	.1	28.35	60	-31.65	-	-
22	5.289	15.68	Av	0	.1	15.78	-	-	50	-34.22
23	14.0505	34.25	Pk	.1	.2	34.55	60	-25.45	-	-
24	14.0505	23.51	Av	.1	.2	23.81	-	-	50	-26.19

Pk - Peak detector
 Av - Average detection