
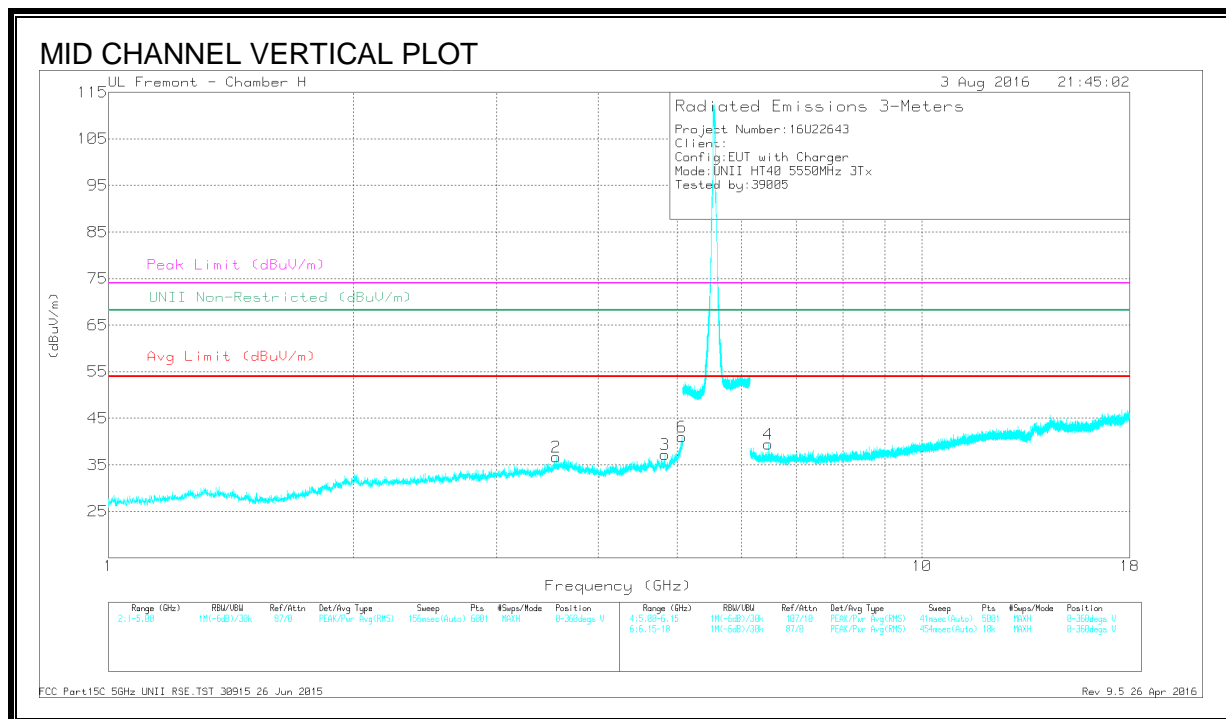


MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

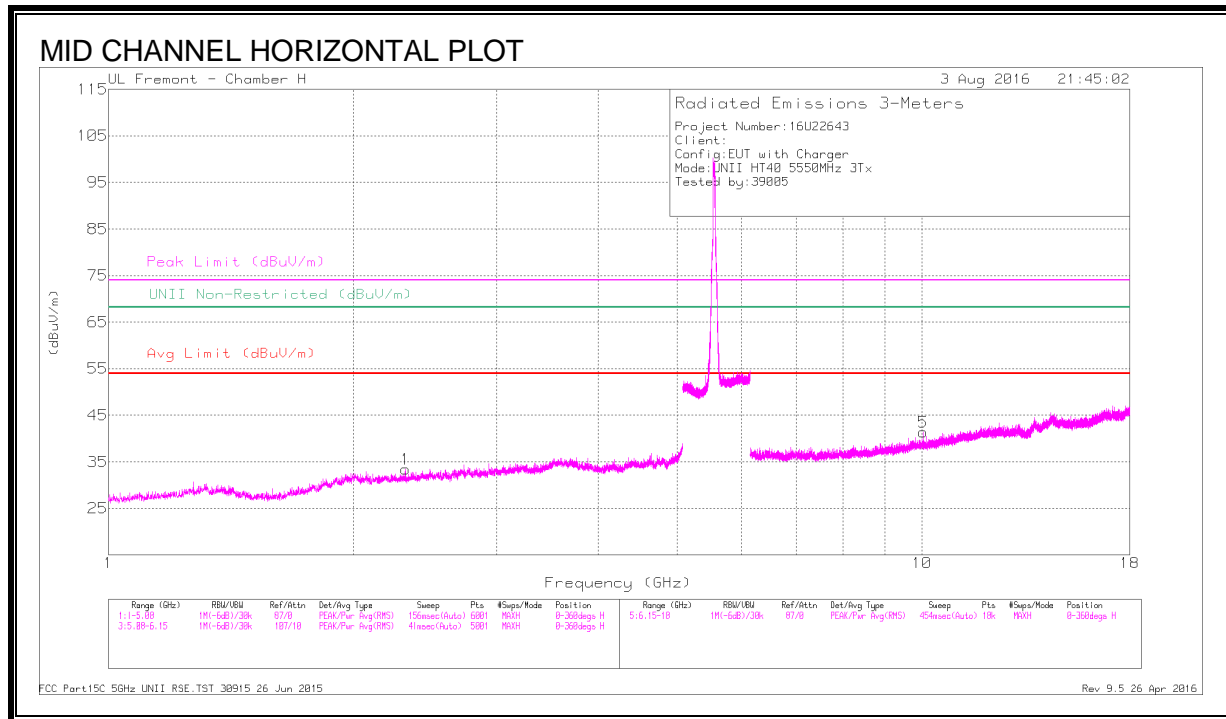

DATA



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.318	45.06	PK-U	31.6	-38.2	38.46	-	-	74	-35.54	-	-	267	215	H
* 2.318	34.47	ADR	31.6	-38.2	27.87	54	-26.13	-	-	-	-	267	215	H
* 3.552	43.39	PK-U	34.6	-36.1	41.89	-	-	74	-32.11	-	-	346	187	V
* 3.553	32.66	ADR	34.6	-36	31.26	54	-22.74	-	-	-	-	346	187	V
* 4.826	43.61	PK-U	34	-34.5	43.11	-	-	74	-30.89	-	-	306	196	V
* 4.827	32.32	ADR	34	-34.5	31.82	54	-22.18	-	-	-	-	306	196	V
* 5.064	42.34	PK-U	34.1	-31.8	44.64	-	-	74	-29.36	-	-	318	190	V
* 5.065	31.86	ADR	34.1	-31.7	34.26	54	-19.74	-	-	-	-	318	190	V
6.475	41.35	PK-U	35.7	-32.1	44.95	-	-	-	-	68.2	-23.25	63	226	V
10.029	37.59	PK-U	37.6	-29.3	45.89	-	-	-	-	68.2	-22.31	340	212	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

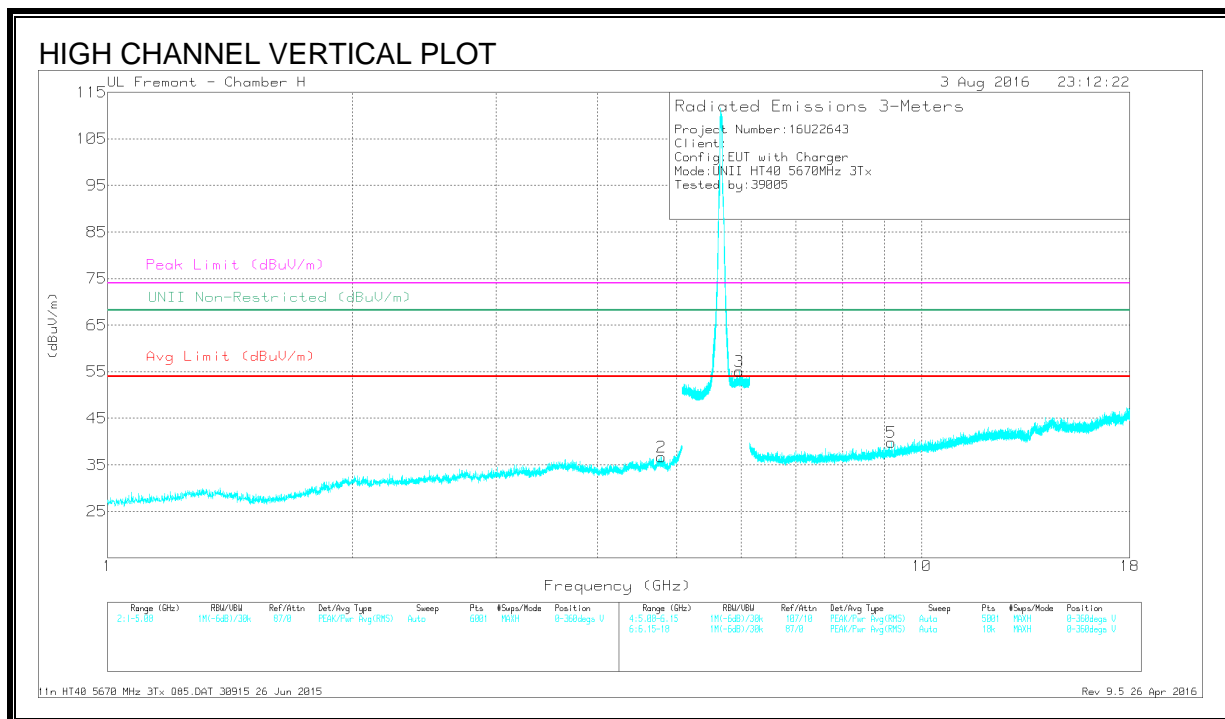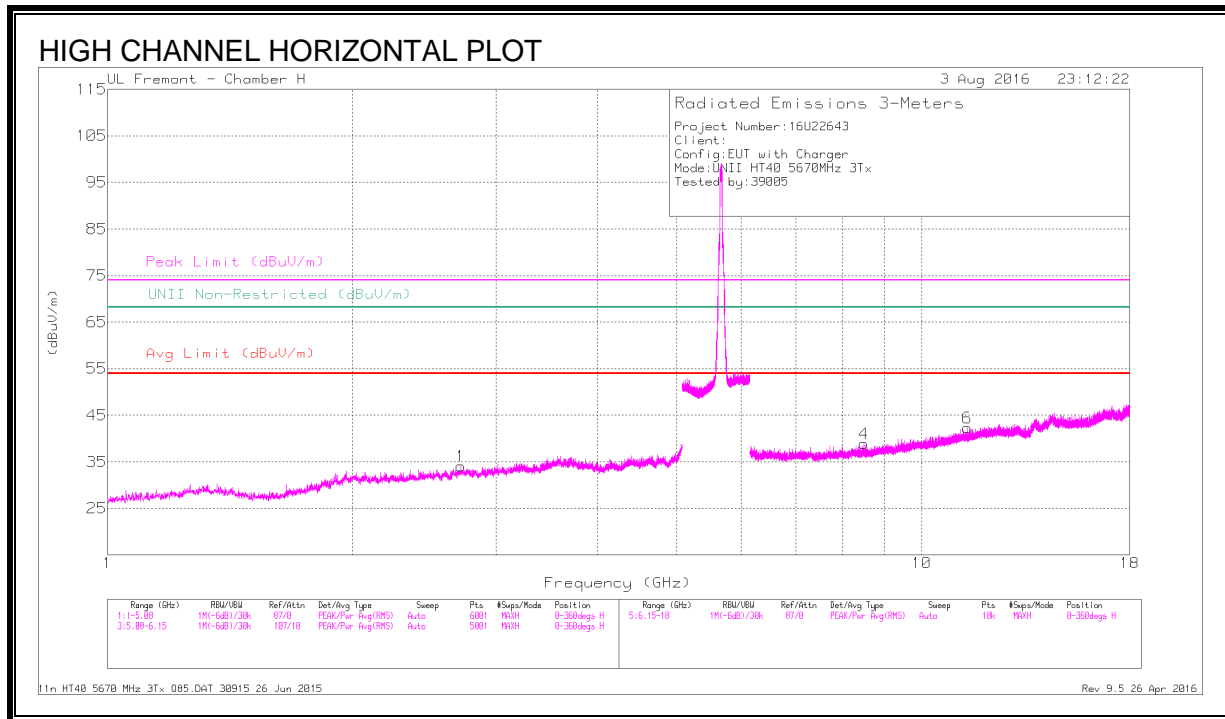

DATA



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.718	45.3	PK-U	32.6	-38	39.9	-	-	74	-34.1	-	-	166	195	H
* 2.718	34.65	ADR	32.6	-38	29.25	54	-24.75	-	-	-	-	166	195	H
* 4.792	42.48	PK-U	34	-34.1	42.38	-	-	74	-31.62	-	-	251	237	V
* 4.792	31.59	ADR	34	-34.1	31.49	54	-22.51	-	-	-	-	251	237	V
* 8.488	38.16	PK-U	35.8	-29.9	44.06	-	-	74	-29.94	-	-	174	201	H
* 8.488	27.72	ADR	35.8	-29.9	33.62	54	-20.38	-	-	-	-	174	201	H
* 11.378	36.01	PK-U	38.6	-27.6	47.01	-	-	74	-26.99	-	-	118	167	H
* 11.377	25.42	ADR	38.6	-27.6	36.42	54	-17.58	-	-	-	-	118	167	H
* 9.171	37.58	PK-U	36.4	-29.4	44.58	-	-	74	-29.42	-	-	166	199	V
* 9.171	27.22	ADR	36.4	-29.4	34.22	54	-19.78	-	-	-	-	166	199	V
5.967	40.04	PK-U	35.3	-14.6	60.74	-	-	-	-	68.2	-7.46	11	313	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.107. 802.11ac VHT40 3Tx CDD STRADDLE CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

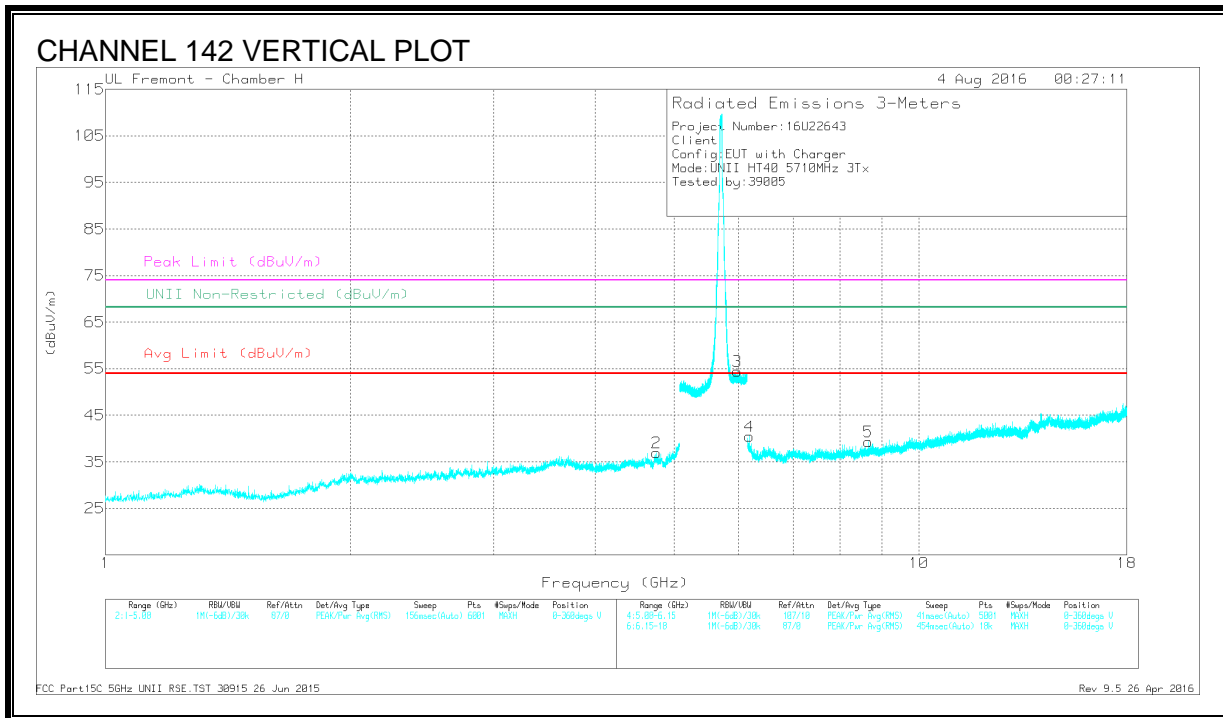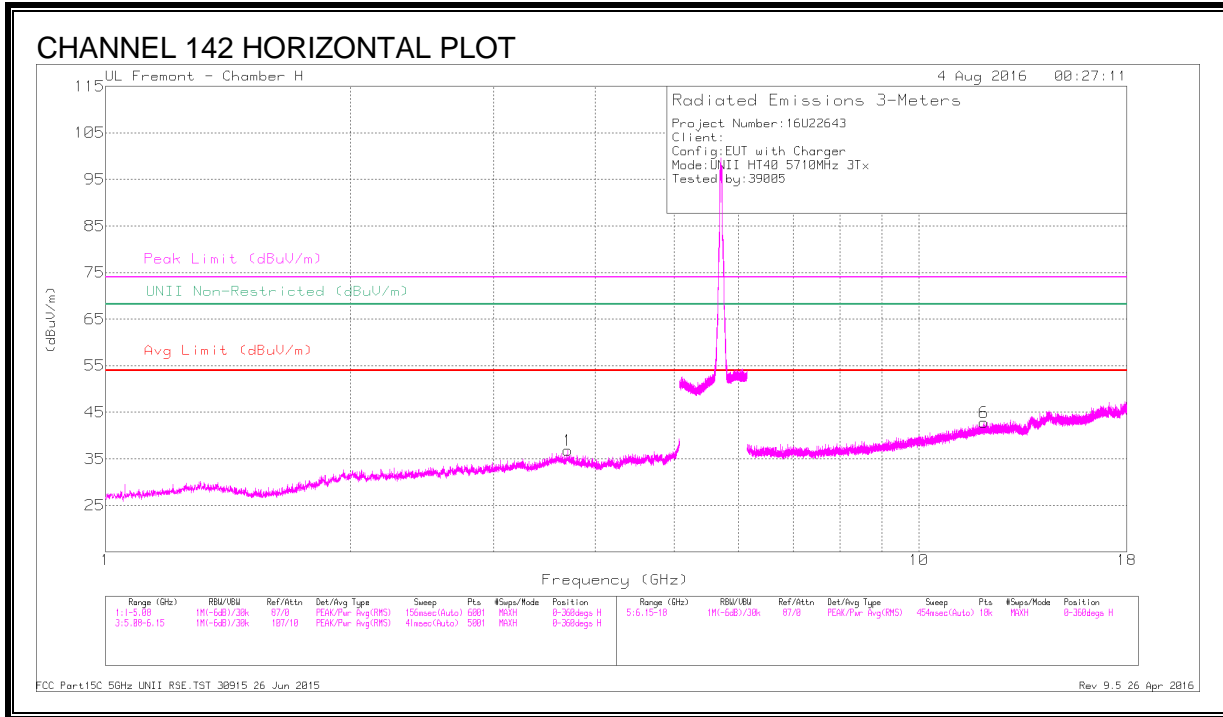

DATA

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.701	43.5	PK-U	34.9	-36.1	42.3	-	-	74	-31.7	-	-	118	186	H
* 3.702	32.94	ADR	34.9	-36.1	31.74	54	-22.26	-	-	-	-	118	186	H
* 4.76	42.33	PK-U	34	-34.2	42.13	-	-	74	-31.87	-	-	160	239	V
* 4.761	31.35	ADR	34	-34.2	31.15	54	-22.85	-	-	-	-	160	239	V
* 12.023	36.33	PK-U	39.3	-26.9	48.73	-	-	74	-25.27	-	-	0	225	H
* 12.023	25.61	ADR	39.3	-26.9	38.01	54	-15.99	-	-	-	-	0	225	H
5.977	39.1	PK-U	35.3	-14.5	59.9	-	-	-	-	68.2	-8.3	256	239	V
6.186	45.22	PK-U	35.5	-31.8	48.92	-	-	-	-	68.2	-19.28	212	102	V
8.66	37.77	PK-U	36	-30.5	43.27	-	-	-	-	68.2	-24.93	71	187	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.108. 802.11n HT40 3Tx STBC MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

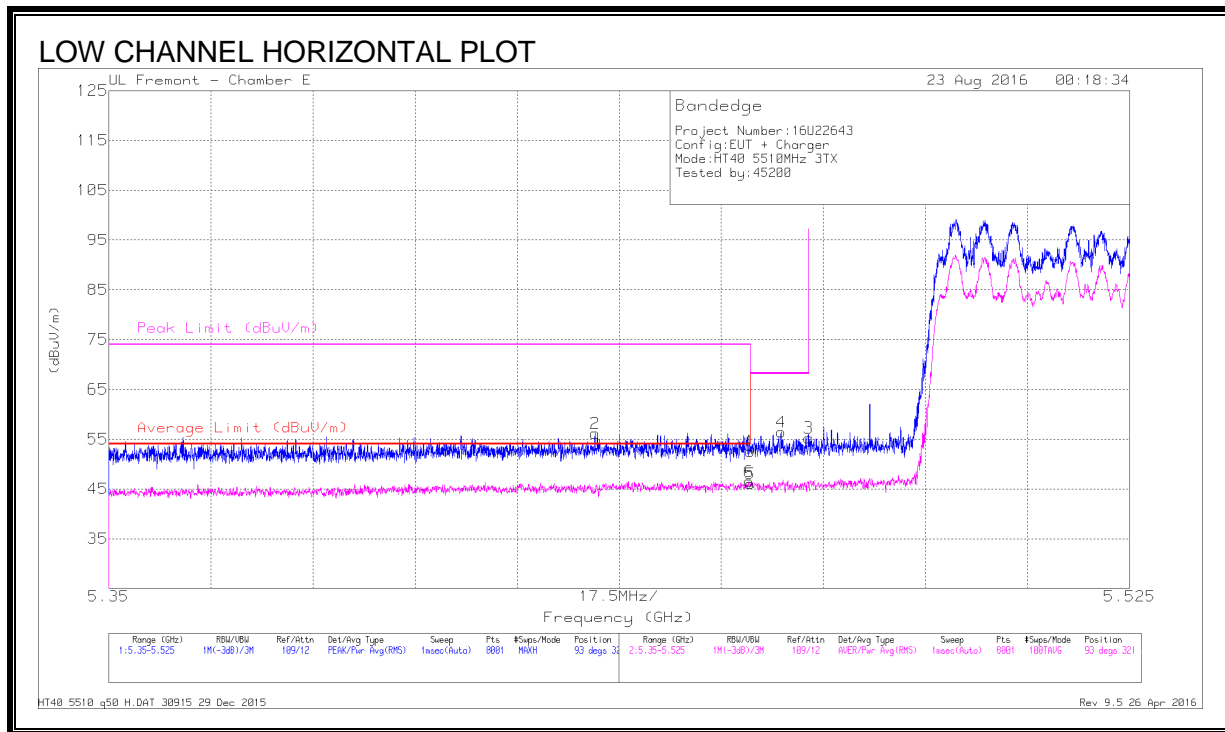


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Filtr/PA d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.88	Pk	34.4	-19.7	52.58	-	-	74	-21.42	93	321	H
2	* 5.433	41.35	Pk	34.4	-19.6	56.15	-	-	74	-17.85	93	321	H
5	* 5.46	31.36	RMS	34.4	-19.7	46.06	54	-7.94	-	-	93	321	H
6	* 5.46	31.82	RMS	34.4	-19.7	46.52	54	-7.48	-	-	93	321	H
4	5.465	41.83	Pk	34.4	-19.8	56.43	-	-	68.2	-11.77	93	321	H
3	5.47	40.55	Pk	34.4	-19.7	55.25	-	-	68.2	-12.95	93	321	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

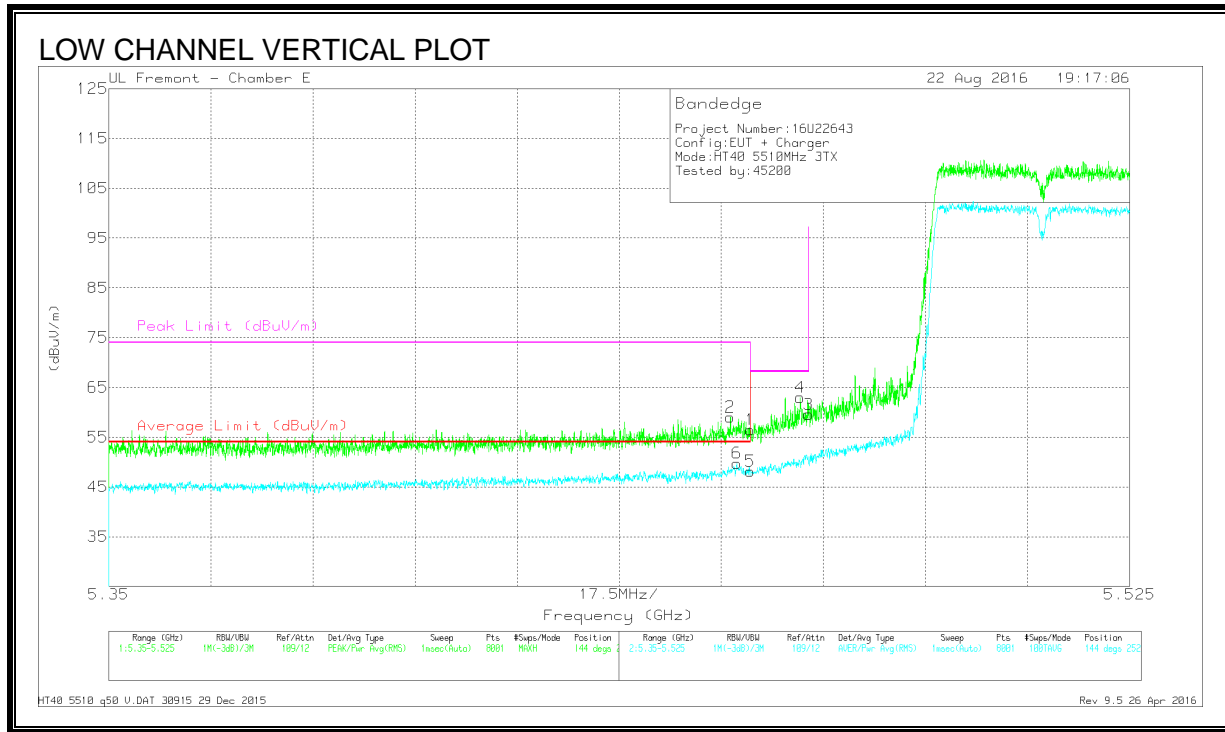

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.79	Pk	34.4	-19.7	56.49	-	-	74	-17.51	144	252	V
2	* 5.457	44.33	Pk	34.4	-19.7	59.03	-	-	74	-14.97	144	252	V
5	* 5.46	33.46	RMS	34.4	-19.7	48.16	54	-5.84	-	-	144	252	V
6	* 5.458	35.08	RMS	34.4	-19.7	49.78	54	-4.22	-	-	144	252	V
4	5.468	48.28	Pk	34.4	-19.7	62.98	-	-	68.2	-5.22	144	252	V
3	5.47	44.86	Pk	34.4	-19.7	59.56	-	-	68.2	-8.64	144	252	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE (HIGH CHANNEL)

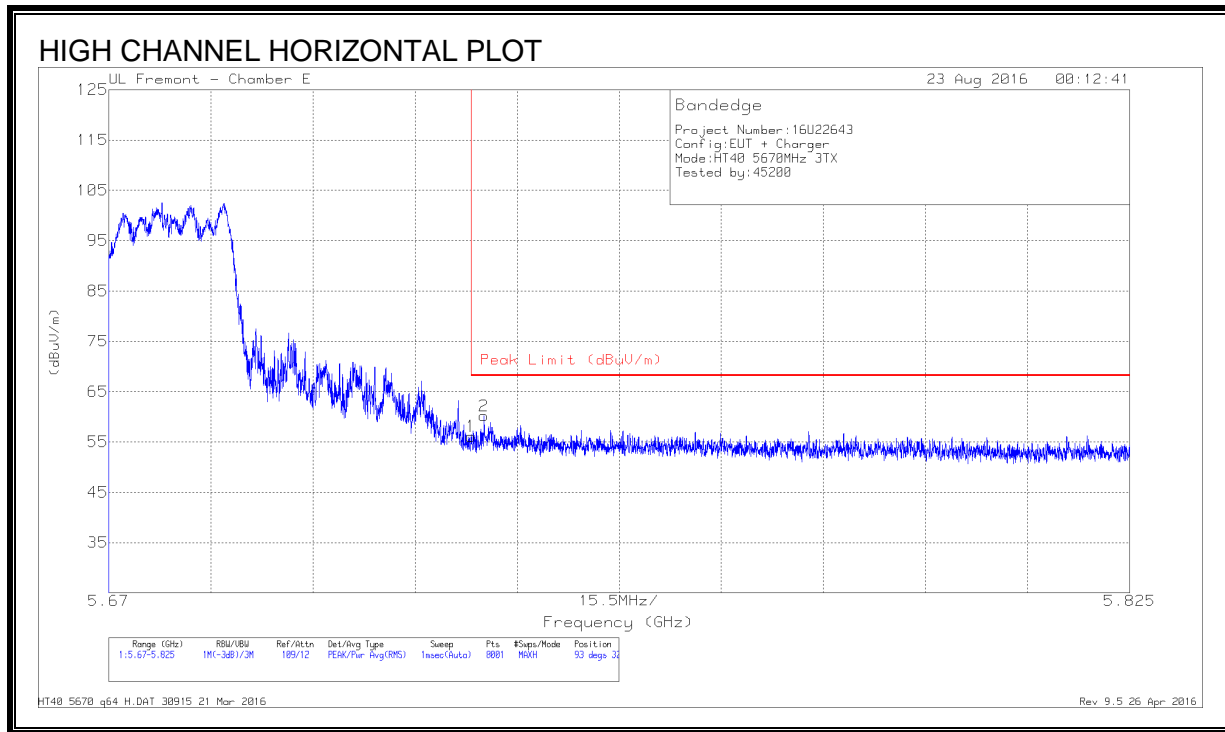

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.02	Pk	34.9	-19.8	56.12	68.2	-12.08	93	321	H
2	5.727	45.18	Pk	34.9	-19.9	60.18	68.2	-8.02	93	321	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

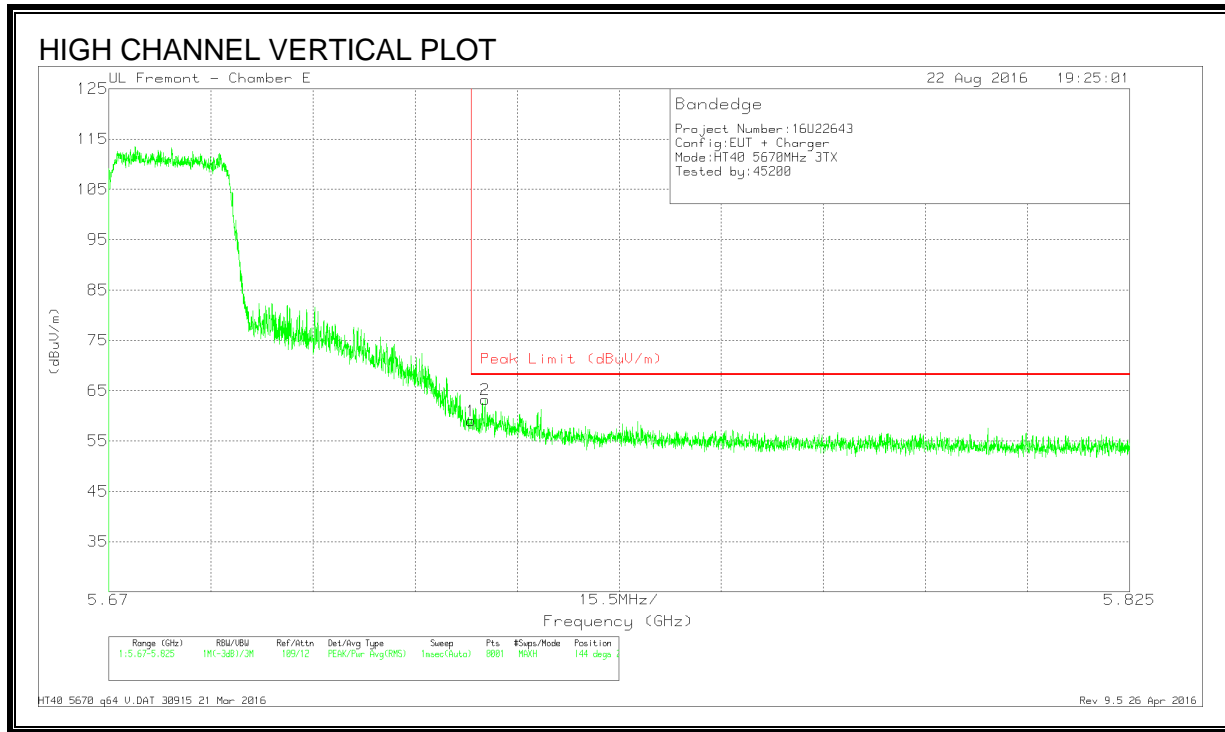

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.88	Pk	34.9	-19.8	58.98	68.2	-9.22	144	252	V
2	5.727	48.23	Pk	34.9	-19.9	63.23	68.2	-4.97	144	252	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS


Note: Covered by 3TX CDD Mode

**8.109. 802.11ac VHT40 3Tx STBC STRADDLE CHANNEL 142 HARMONICS
AND SPURIOUS EMISSIONS**

Note: Covered by 3TX CDD Mode

8.110. 802.11ac VHT40 3Tx BEAM FORMING MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

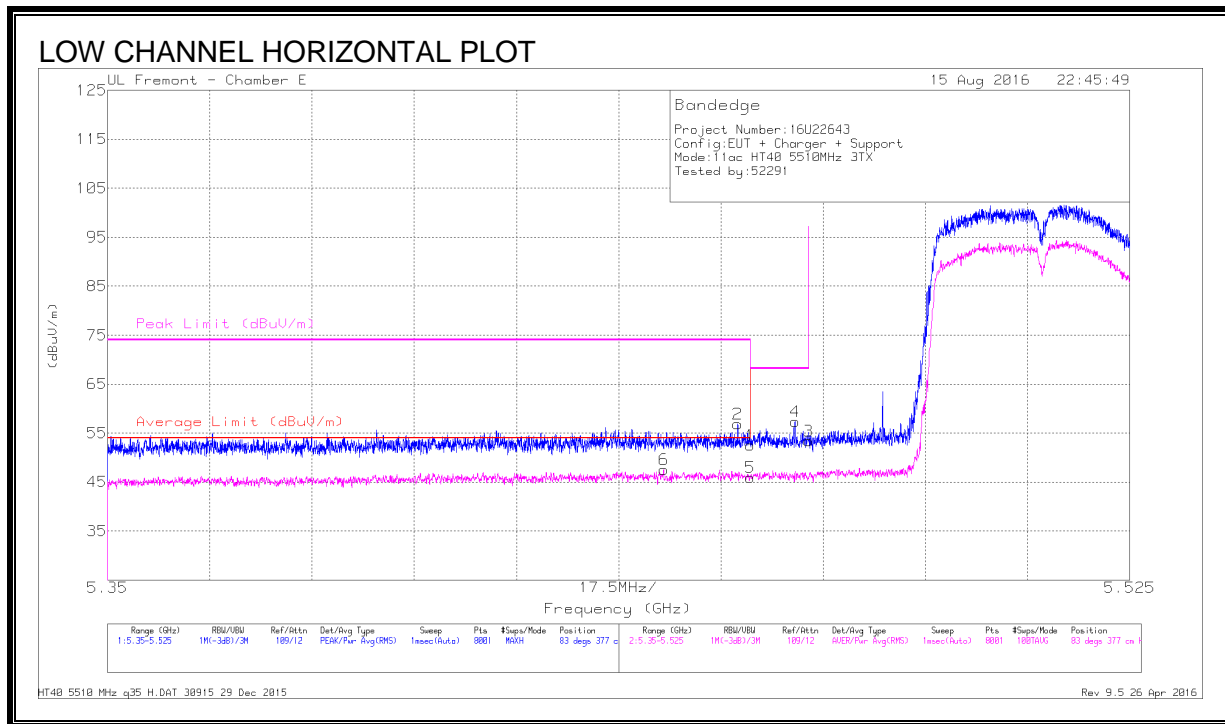


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.83	Pk	34.4	-19.7	0	52.53	-	-	74	-21.47	83	377	H
2	* 5.458	42.2	Pk	34.4	-19.7	0	56.9	-	-	74	-17.1	83	377	H
5	* 5.46	30.41	RMS	34.4	-19.7	.58	45.93	54	-8.07	-	-	83	377	H
6	* 5.445	31.94	RMS	34.4	-19.6	.58	47.56	54	-6.44	-	-	83	377	H
4	5.468	42.71	Pk	34.4	-19.7	0	57.41	-	-	68.2	-10.79	83	377	H
3	5.47	38.68	Pk	34.4	-19.7	0	53.38	-	-	68.2	-14.82	83	377	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

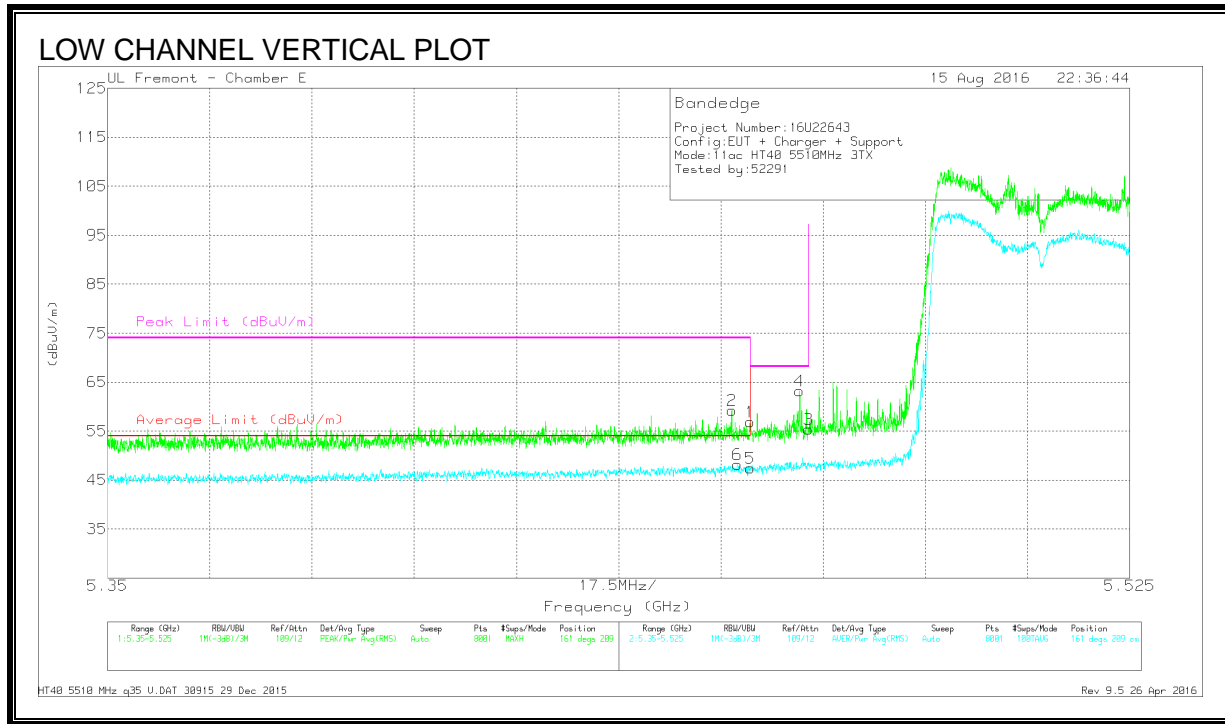

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.18	Pk	34.4	-19.7	0	56.88	-	-	74	-17.12	161	209	V
2	* 5.457	44.5	Pk	34.4	-19.7	0	59.2	-	-	74	-14.8	161	209	V
5	* 5.46	31.9	RMS	34.4	-19.7	.58	47.42	54	-6.58	-	-	161	209	V
6	* 5.458	32.66	RMS	34.4	-19.7	.58	48.18	54	-5.82	-	-	161	209	V
4	5.468	48.46	Pk	34.4	-19.7	0	63.16	-	-	68.2	-5.04	161	209	V
3	5.47	40.73	Pk	34.4	-19.7	0	55.43	-	-	68.2	-12.77	161	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE (HIGH CHANNEL)

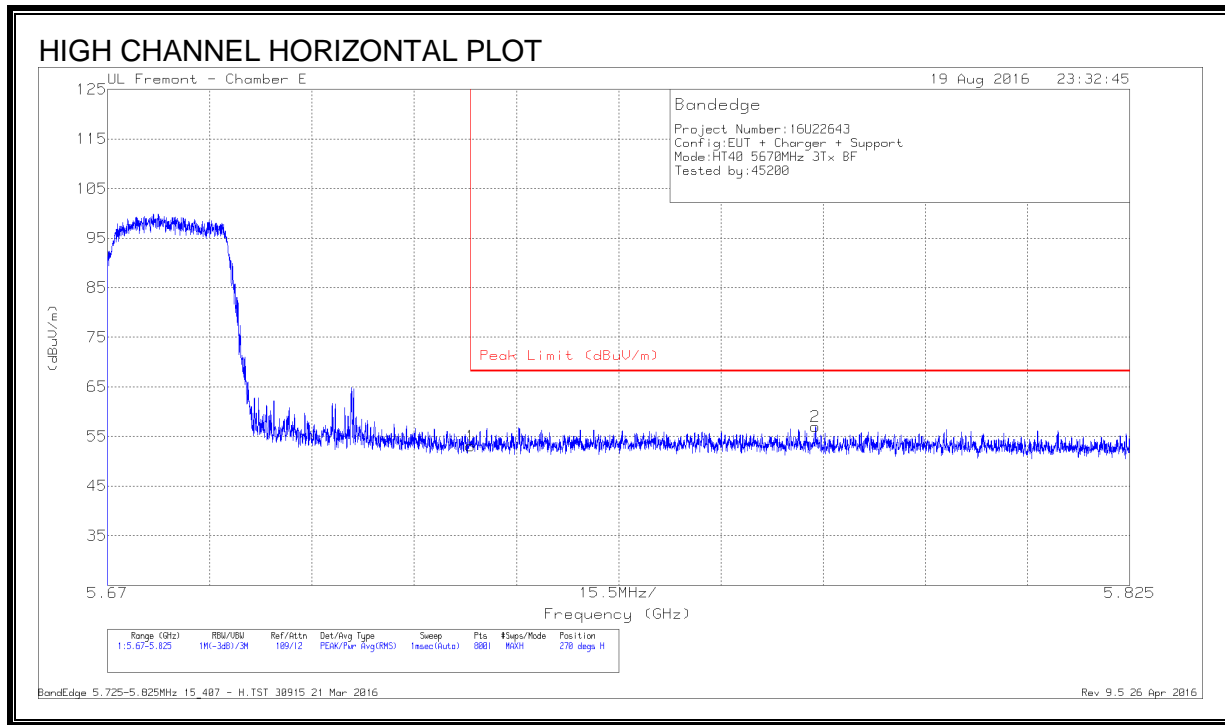

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.94	Pk	34.9	-19.8	53.04	68.2	-15.16	270	253	H
2	5.777	42.25	Pk	34.8	-20	57.05	68.2	-11.15	270	253	H

Pk - Peak detector


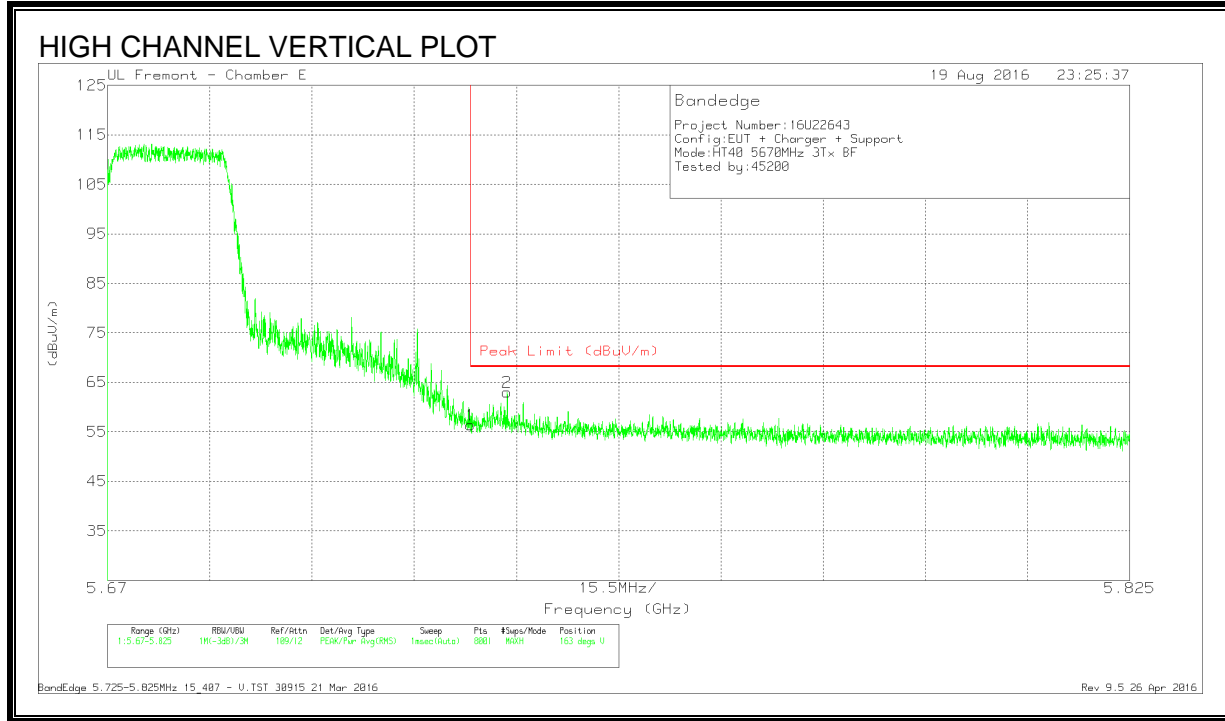


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.32	Pk	34.9	-19.8	56.42	68.2	-11.78	163	229	V
2	5.731	47.98	Pk	34.9	-19.9	62.98	68.2	-5.22	163	229	V

Pk - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

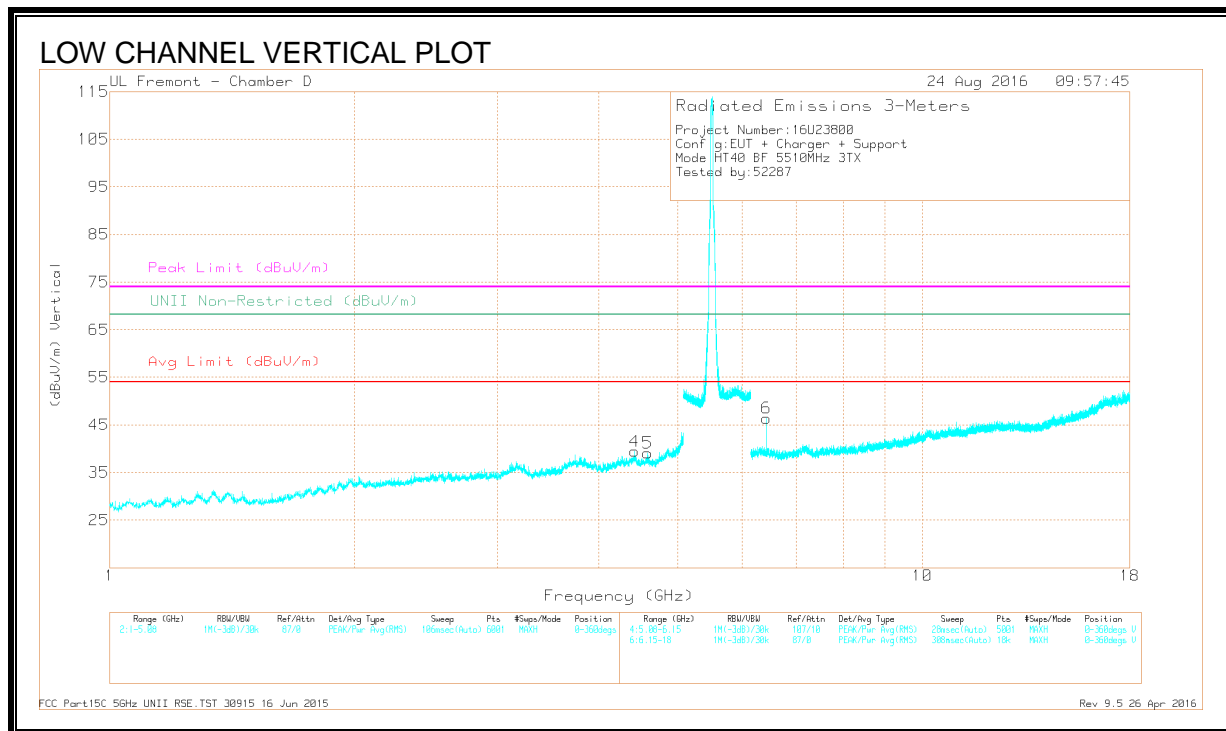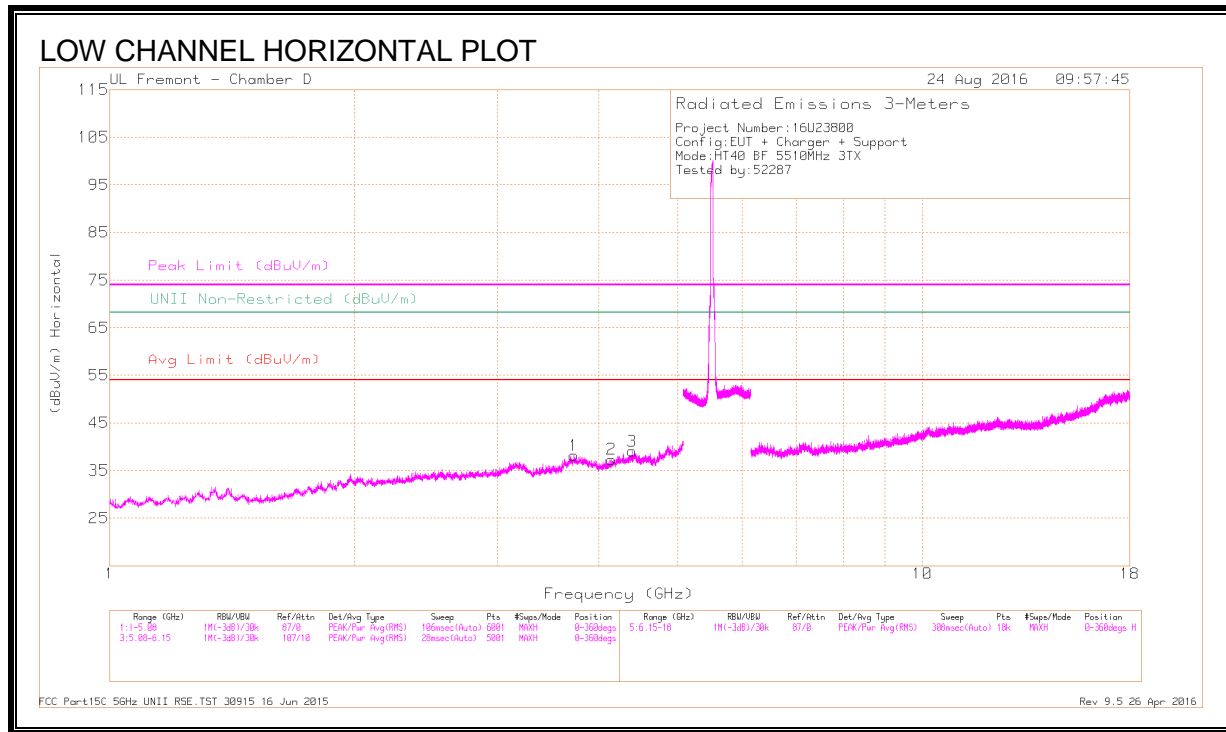

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl /Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarity
1	* 3.725	38.62	PK-U	33.5	-28.9	0	43.22	-	-	74	-30.78	-	-	345	400	H
	* 3.727	27.54	ADR	33.5	-28.9	.58	32.87	54	-21.13	-	-	-	-	345	400	H
2	* 4.147	37.17	PK-U	33.5	-28.2	0	42.47	-	-	74	-31.53	-	-	141	105	H
	* 4.148	26.72	ADR	33.5	-28.2	.58	32.75	54	-21.25	-	-	-	-	141	105	H
3	* 4.398	36.8	PK-U	33.9	-27.3	0	43.4	-	-	74	-30.6	-	-	284	167	H
	* 4.398	26.28	ADR	33.9	-27.4	.58	33.51	54	-20.49	-	-	-	-	284	167	H
	* 4.591	39.34	PK-U	34.2	-26.9	0	46.64	-	-	74	-27.36	-	-	280	244	V
5	* 4.592	30.27	ADR	34.2	-26.9	.58	38.3	54	-15.7	-	-	-	-	280	244	V
	4.427	37.33	PK-U	33.9	-27.1	0	44.13	-	-	-	-	68.2	-24.07	0	177	V
4	4.428	26.53	ADR	33.9	-27.1	.58	34.06	-	-	-	-	-	-	0	177	V
	6.428	40.5	PK-U	35.7	-26.1	0	50.1	-	-	-	-	68.2	-18.1	290	202	V
6	6.428	32.44	ADR	35.7	-26.1	.58	42.77	-	-	-	-	-	-	290	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

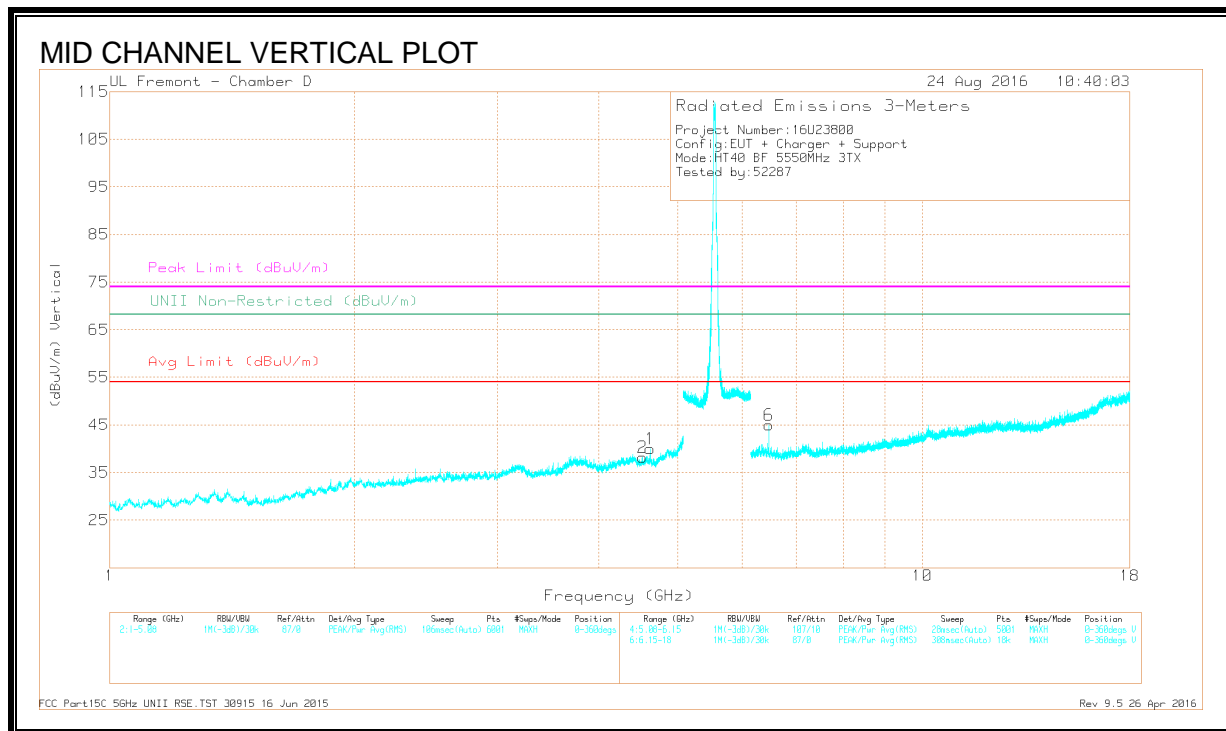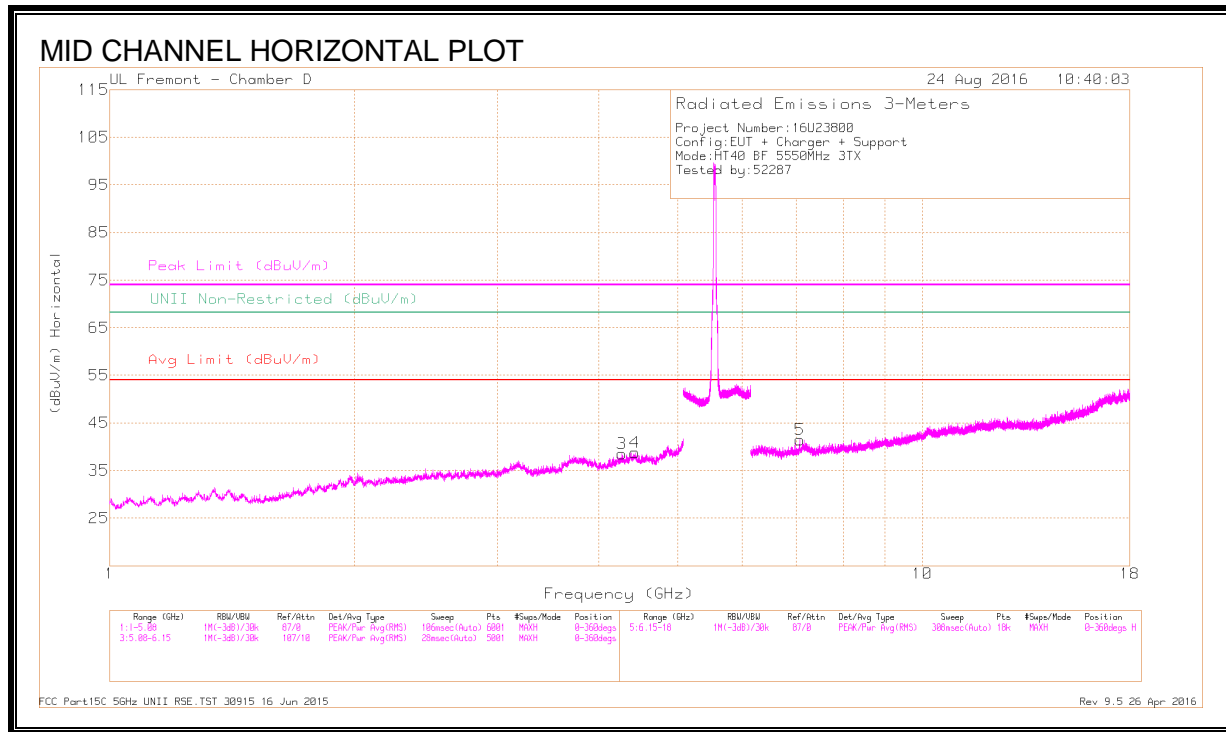

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl /Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarity
3	* 4.27	37.07	PK-U	33.5	-27.5	0	43.07	-	-	74	-30.93	-	-	160	159	H
	* 4.268	26.7	ADR	33.5	-27.4	.58	33.53	54	-20.47	-	-	-	-	160	159	H
1	* 4.625	39.7	PK-U	34.1	-26.6	0	47.2	-	-	74	-26.8	-	-	285	248	V
	* 4.625	29.95	ADR	34.1	-26.6	.58	38.18	54	-15.82	-	-	-	-	285	248	V
	* 4.525	38.06	PK-U	34	-28	0	44.06	-	-	74	-29.94	-	-	352	108	V
2	* 4.523	27.06	ADR	34	-28	.58	33.79	54	-20.21	-	-	-	-	352	108	V
4	4.429	38.25	PK-U	33.9	-27.1	0	45.05	-	-	-	-	68.2	-23.15	245	105	H
6	6.475	38.46	PK-U	35.6	-25.4	0	48.66	-	-	-	-	68.2	-19.54	291	213	V
5	7.072	36.58	PK-U	35.8	-25.2	0	47.18	-	-	-	-	68.2	-21.02	337	239	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

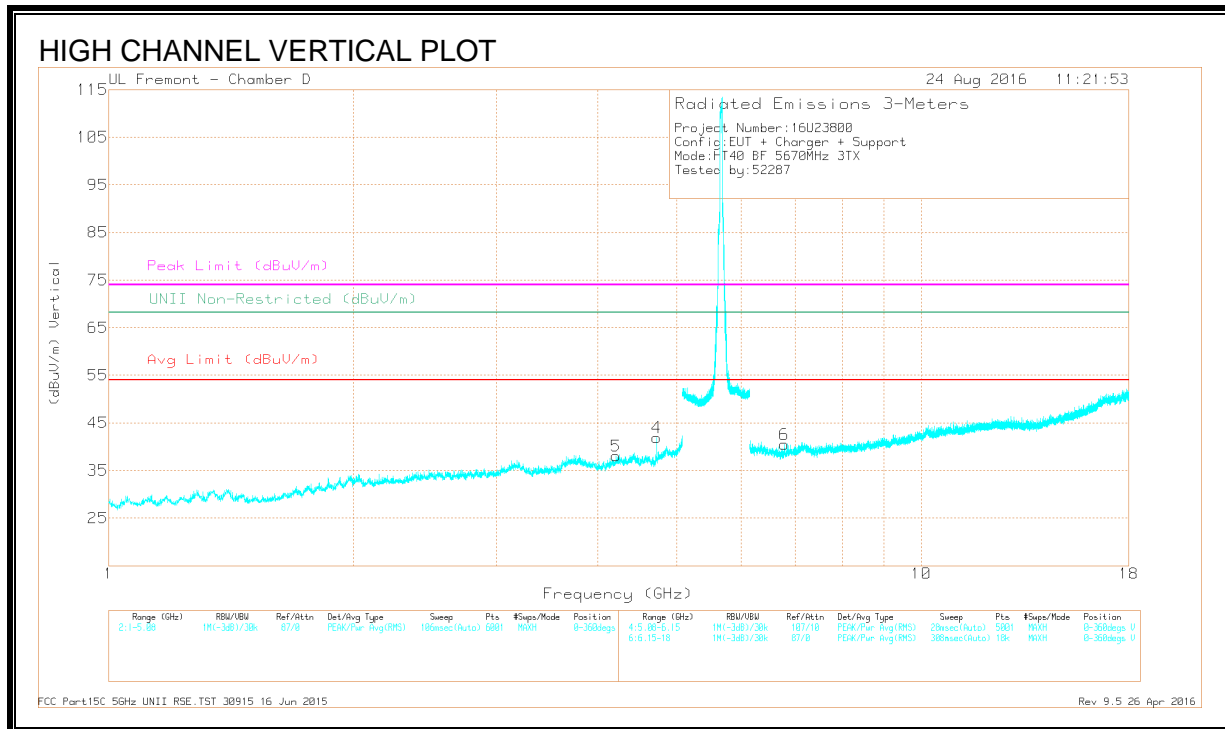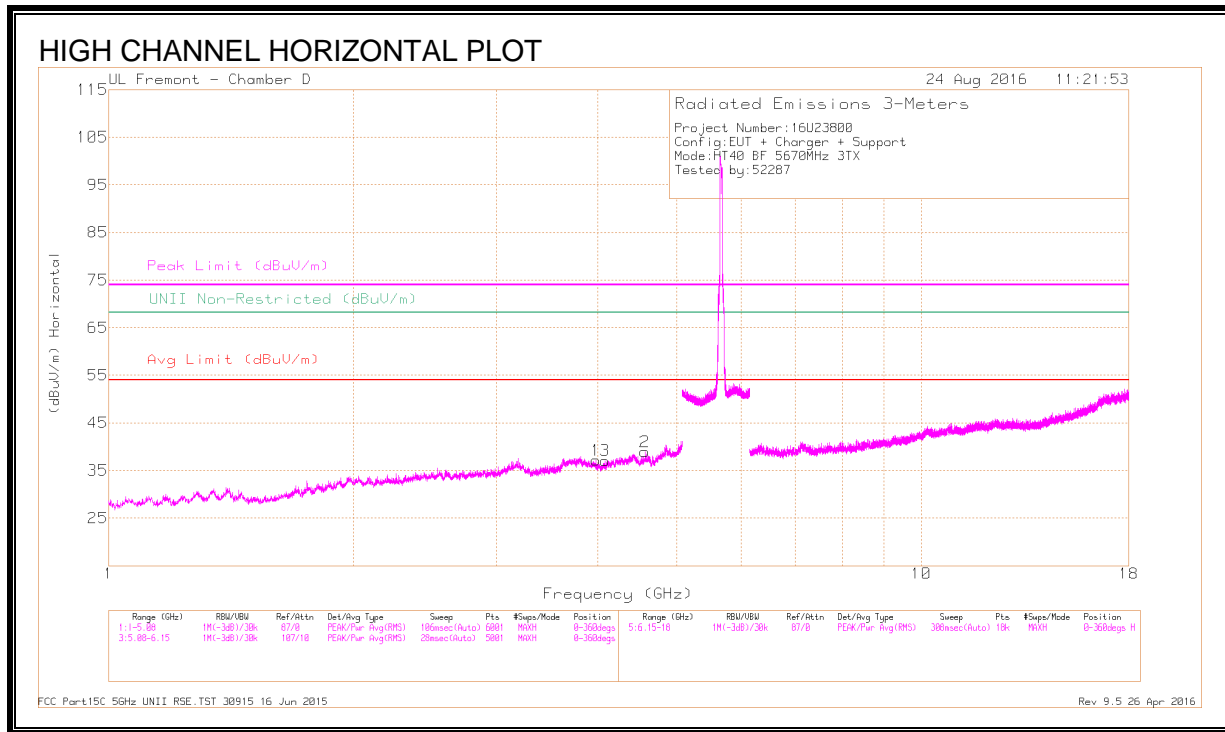

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl /Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarity
1	* 3.978	37.11	PK-U	33.3	-28	0	42.41	-	-	74	-31.59	-	-	95	246	H
	* 3.977	26.44	ADR	33.4	-28	.58	32.57	54	-21.43	-	-	-	-	95	246	H
	* 4.571	37.15	PK-U	34.1	-27.2	0	44.05	-	-	74	-29.95	-	-	0	335	H
2	* 4.569	26.7	ADR	34.1	-27.2	.58	34.33	54	-19.67	-	-	-	-	0	335	H
3	* 4.079	38	PK-U	33.5	-28.6	0	42.9	-	-	74	-31.1	-	-	6	102	H
	* 4.078	26.99	ADR	33.5	-28.6	.58	32.62	54	-21.38	-	-	-	-	6	102	H
4	* 4.725	40.68	PK-U	34	-27.6	0	47.08	-	-	74	-26.92	-	-	275	265	V
	* 4.725	32.14	ADR	34	-27.6	.58	39.27	54	-14.73	-	-	-	-	275	265	V
5	* 4.206	37.85	PK-U	33.5	-27.7	0	43.65	-	-	74	-30.35	-	-	131	376	V
	* 4.206	26.9	ADR	33.5	-27.7	.58	33.43	54	-20.57	-	-	-	-	131	376	V
6	6.784	35.99	PK-U	35.6	-25.8	0	45.79	-	-	-	-	68.2	-22.41	160	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.111. 802.11ac VHT40 3Tx BEAM FORMING STRADDLE CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

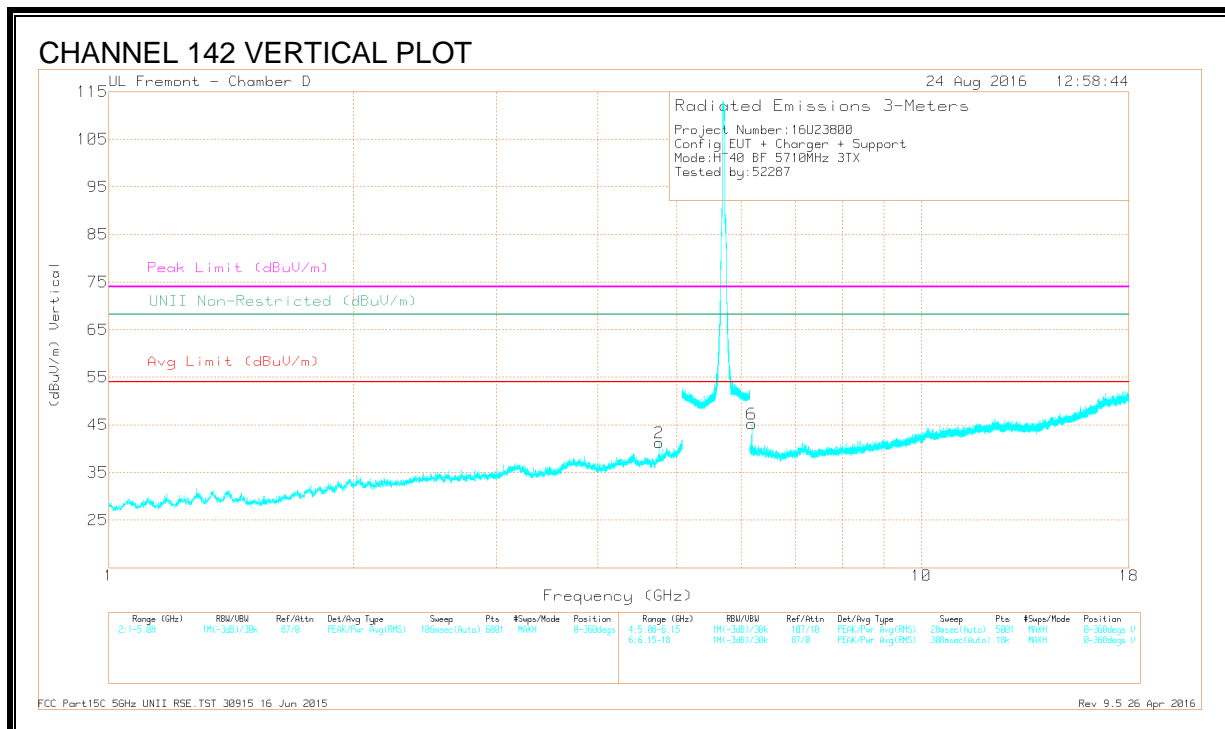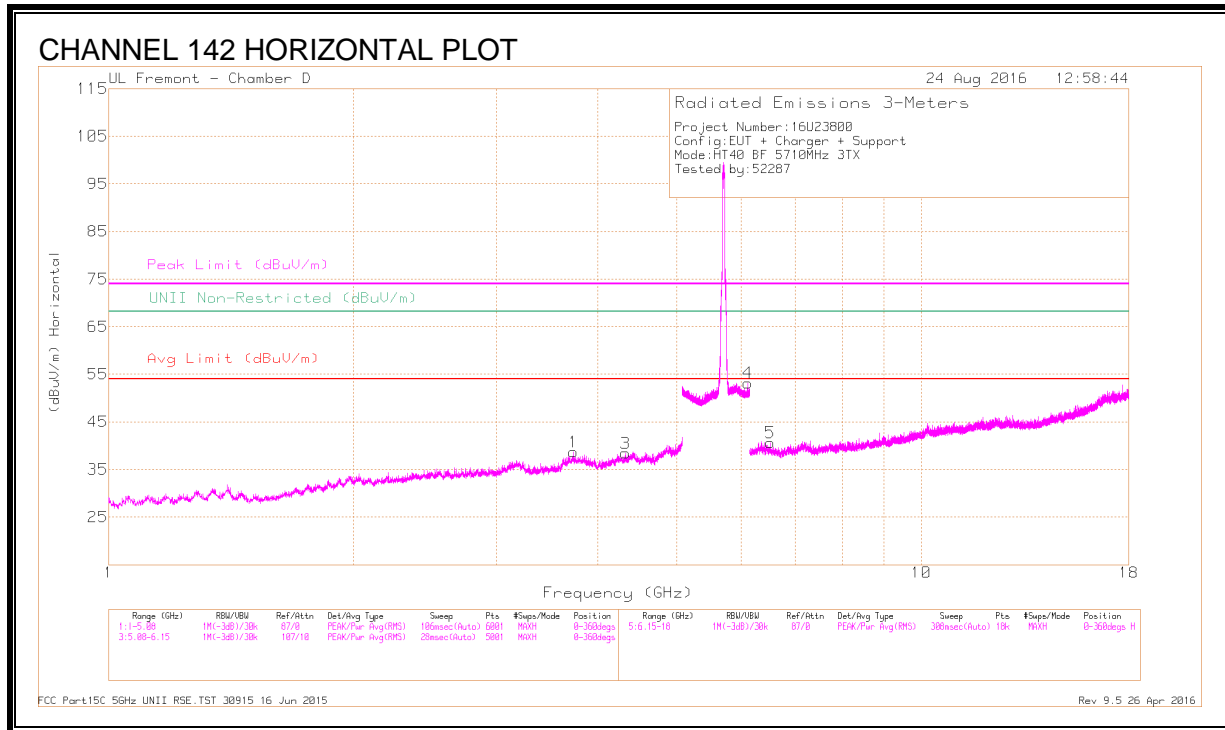

DATA

Mark ers	Freque ncy (GHz)	Mete r Readi ng (dBu V)	Det	AF T712 (dB/m)	Amp/Cb/F lter/Pad (dB)	DC Corr (dB)	Correct ed Readin g (dBuV/ m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restrict ed (dBuV/m)	PK Margi n (dB)	Azi mut h (Deg s)	Hei ght (cm)	Pola rity
1	* 3.734	38.16	PK-U	33.5	-28.8	0	42.86	-	-	74	-31.14	-	-	41	147	H
	* 3.736	27.36	ADR	33.5	-28.8	.58	32.79	54	-21.21	-	-	-	-	41	147	H
3	* 4.324	37.36	PK-U	33.6	-28.2	0	42.76	-	-	74	-31.24	-	-	94	313	H
	* 4.322	27.19	ADR	33.6	-28.2	.58	33.32	54	-20.68	-	-	-	-	94	313	H
	* 4.759	41.45	PK-U	34	-27.2	0	48.25	-	-	74	-25.75	-	-	272	233	V
2	* 4.758	32.09	ADR	34	-27.2	.58	39.62	54	-14.38	-	-	-	-	272	233	V
4	6.117	40.01	PK-U	35.4	-17.2	0	58.21	-	-	-	-	68.2	-9.99	188	150	H
6	6.186	41.95	PK-U	35.5	-26.2	0	51.25	-	-	-	-	68.2	-16.95	270	182	V
	6.518	35.56	PK-U	35.6	-24.9	0	46.26	-	-	-	-	68.2	-21.94	220	272	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.112. 802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

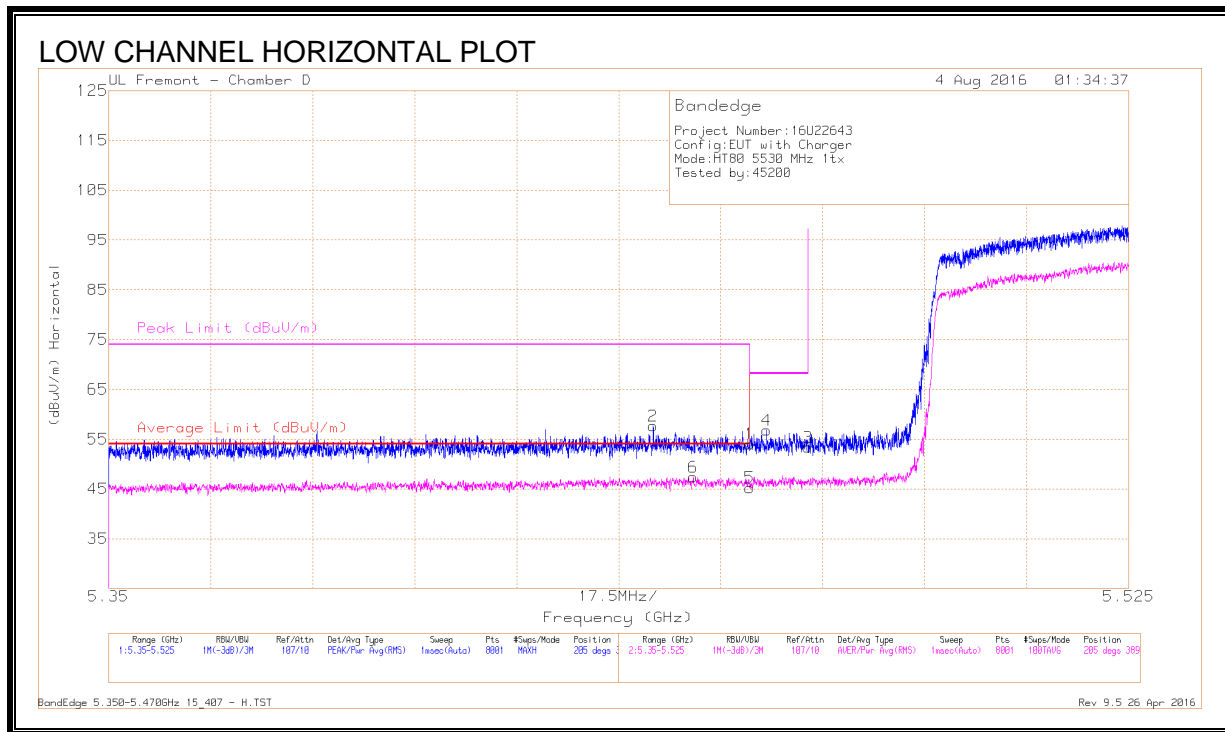


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.443	41.25	PK	34.4	-18	0	57.65	-	-	74	-16.35	205	389	H
6	* 5.45	30.75	RMS	34.4	-17.9	.09	47.38	54	-6.62	-	-	205	389	H
1	* 5.46	37.45	PK	34.4	-17.8	0	54.05	-	-	74	-19.95	205	389	H
5	* 5.46	28.51	RMS	34.4	-17.8	.09	45.24	54	-8.76	-	-	205	389	H
4	5.463	40.17	PK	34.4	-17.8	0	56.77	-	-	68.2	-11.43	205	389	H
3	5.47	36.79	PK	34.4	-17.8	0	53.39	-	-	68.2	-14.81	205	389	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

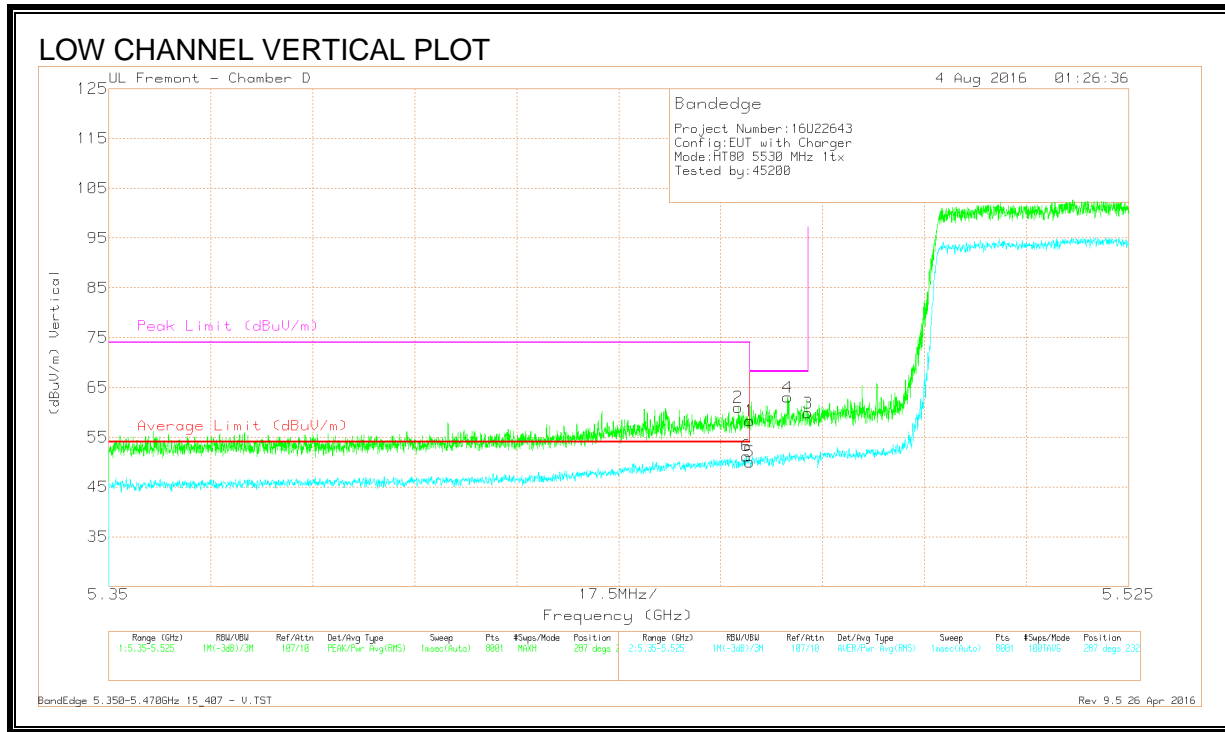


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.458	44.49	Pk	34.4	-17.9	0	60.99	-	-	74	-13.01	287	232	V
6	* 5.459	34.51	RMS	34.4	-17.8	.09	51.24	54	-2.76	-	-	287	232	V
1	* 5.46	41.72	Pk	34.4	-17.8	0	58.32	-	-	74	-15.68	287	232	V
5	* 5.46	33.3	RMS	34.4	-17.8	.09	50.03	54	-3.97	-	-	287	232	V
4	5.466	46.43	Pk	34.4	-17.8	0	63.03	-	-	68.2	-5.17	287	232	V
3	5.47	43.25	Pk	34.4	-17.8	0	59.85	-	-	68.2	-8.35	287	232	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

RESTRICTED BANDEDGE, CHAIN 1 (LOW CHANNEL)

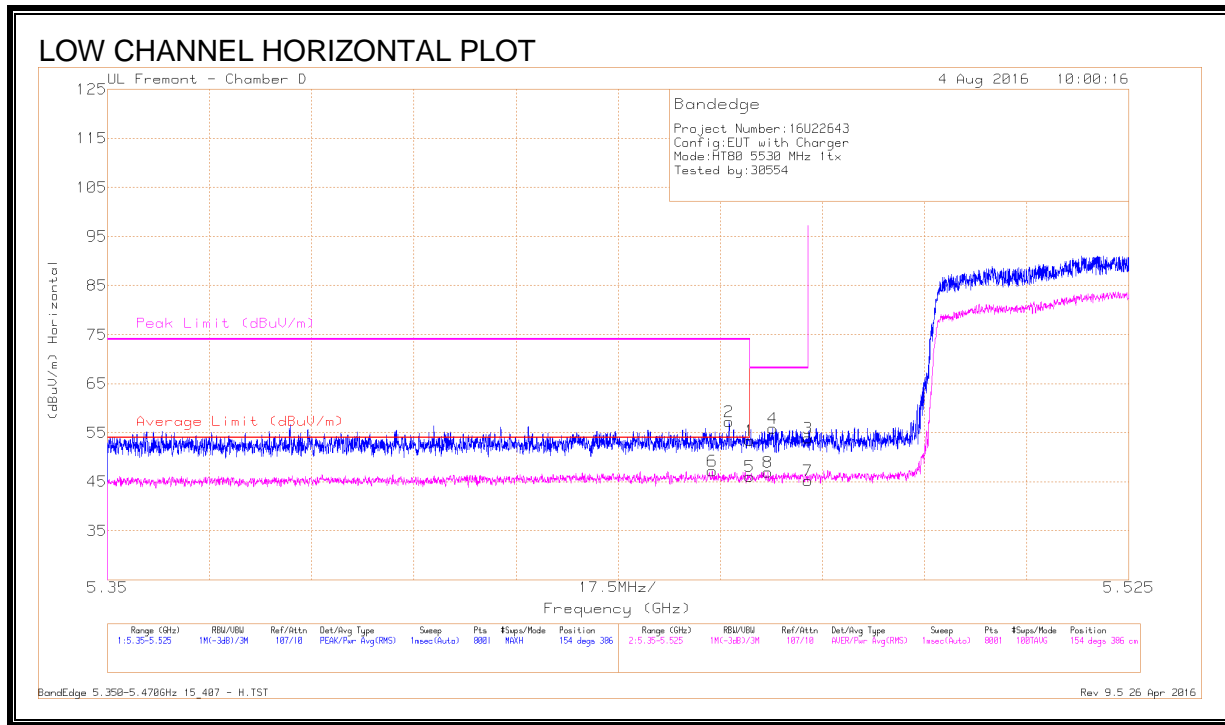


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.454	30.64	RMS	34.4	-17.9	.09	47.14	54	-6.86	-	-	154	386	H
2	* 5.457	40.75	Pk	34.4	-17.9	0	57.25	-	-	74	-16.75	154	386	H
1	* 5.46	36.81	Pk	34.4	-17.8	0	53.41	-	-	74	-20.59	154	386	H
5	* 5.46	29.51	RMS	34.4	-17.8	.09	46.11	54	-7.89	-	-	154	386	H
8	5.463	30.36	RMS	34.4	-17.8	.09	46.96	-	-	-	-	154	386	H
4	5.464	39.28	Pk	34.4	-17.8	0	55.88	-	-	68.2	-12.32	154	386	H
3	5.47	37.33	Pk	34.4	-17.8	0	53.93	-	-	68.2	-14.27	154	386	H
7	5.47	28.56	RMS	34.4	-17.8	.09	45.16	-	-	-	-	154	386	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

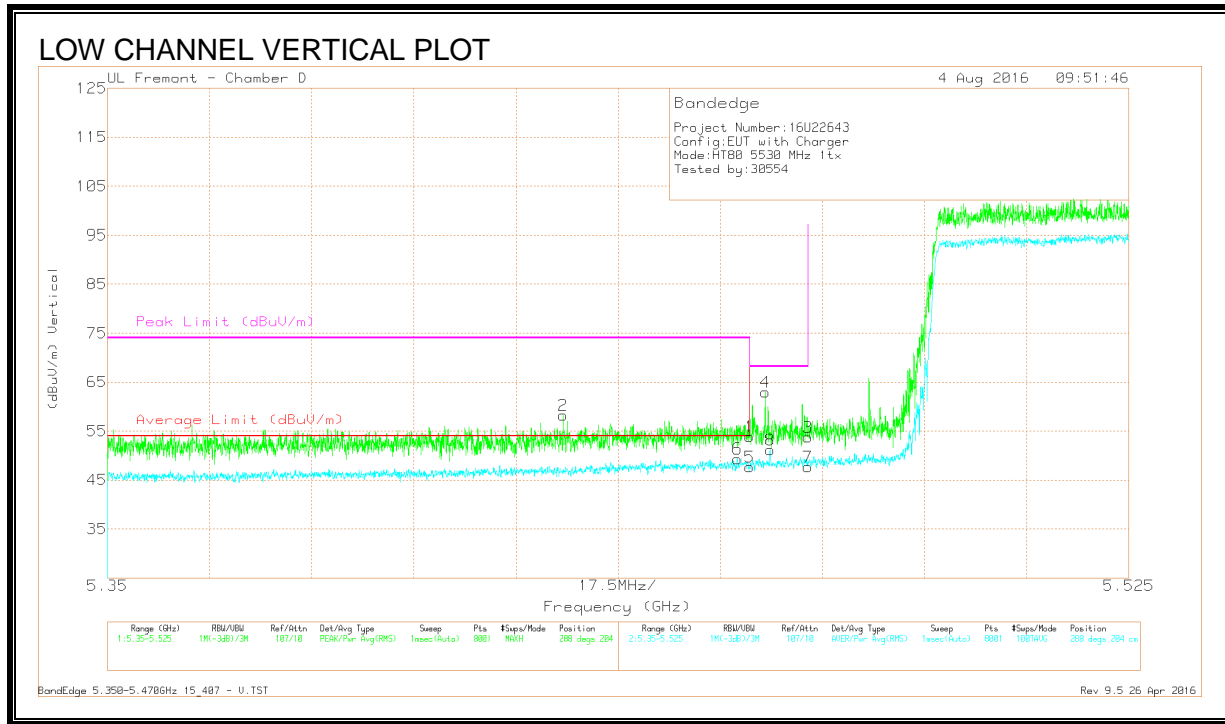

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT712 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.428	41.8	Pk	34.4	-18	0	58.2	-	-	74	-15.8	288	204	V
6	* 5.458	32.86	RMS	34.4	-17.9	.09	49.49	54	-4.51	-	-	288	204	V
1	* 5.46	37.33	Pk	34.4	-17.8	0	53.93	-	-	74	-20.07	288	204	V
5	* 5.46	31.03	RMS	34.4	-17.8	..09	47.76	54	-6.24	-	-	288	204	V
4	5.463	46.35	Pk	34.4	-17.8	0	62.95	-	-	68.2	-5.25	288	204	V
8	5.464	34.52	RMS	34.4	-17.8	..09	51.25	-	-	-	-	288	204	V
3	5.47	37.19	Pk	34.4	-17.8	0	53.79	-	-	68.2	-14.41	288	204	V
7	5.47	31.13	RMS	34.4	-17.8	.09	47.86	-	-	-	-	288	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE, CHAIN 2 (LOW CHANNEL)

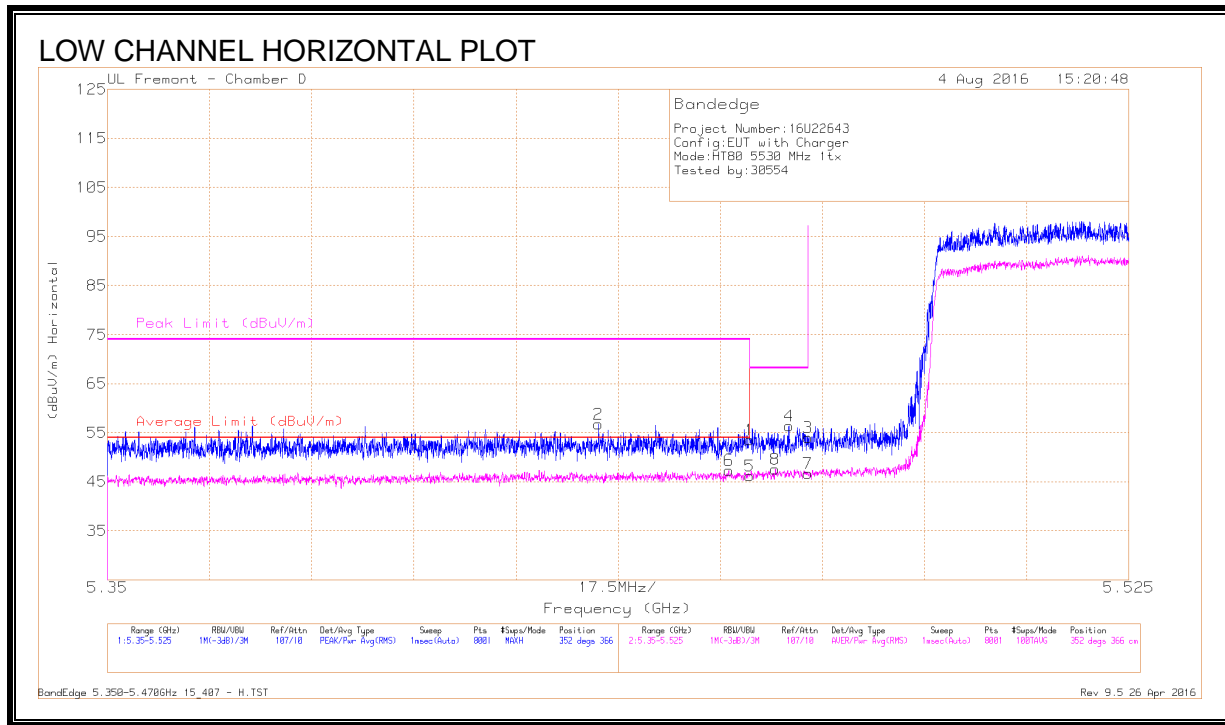


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.434	40.39	Pk	34.4	-18	0	56.79	-	-	74	-17.21	352	366	H
6	* 5.456	30.74	RMS	34.4	-17.9	.09	47.37	54	-6.63	-	-	352	366	H
1	* 5.46	36.88	Pk	34.4	-17.8	0	53.48	-	-	74	-20.52	352	366	H
5	* 5.46	29.5	RMS	34.4	-17.8	.09	46.23	54	-7.77	-	-	352	366	H
8	5.464	30.84	RMS	34.4	-17.8	.09	47.57	-	-	-	-	352	366	H
4	5.467	39.82	Pk	34.4	-17.8	0	56.42	-	-	68.2	-11.78	352	366	H
3	5.47	37.45	Pk	34.4	-17.8	0	54.05	-	-	68.2	-14.15	352	366	H
7	5.47	29.94	RMS	34.4	-17.8	.09	46.67	-	-	-	-	352	366	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

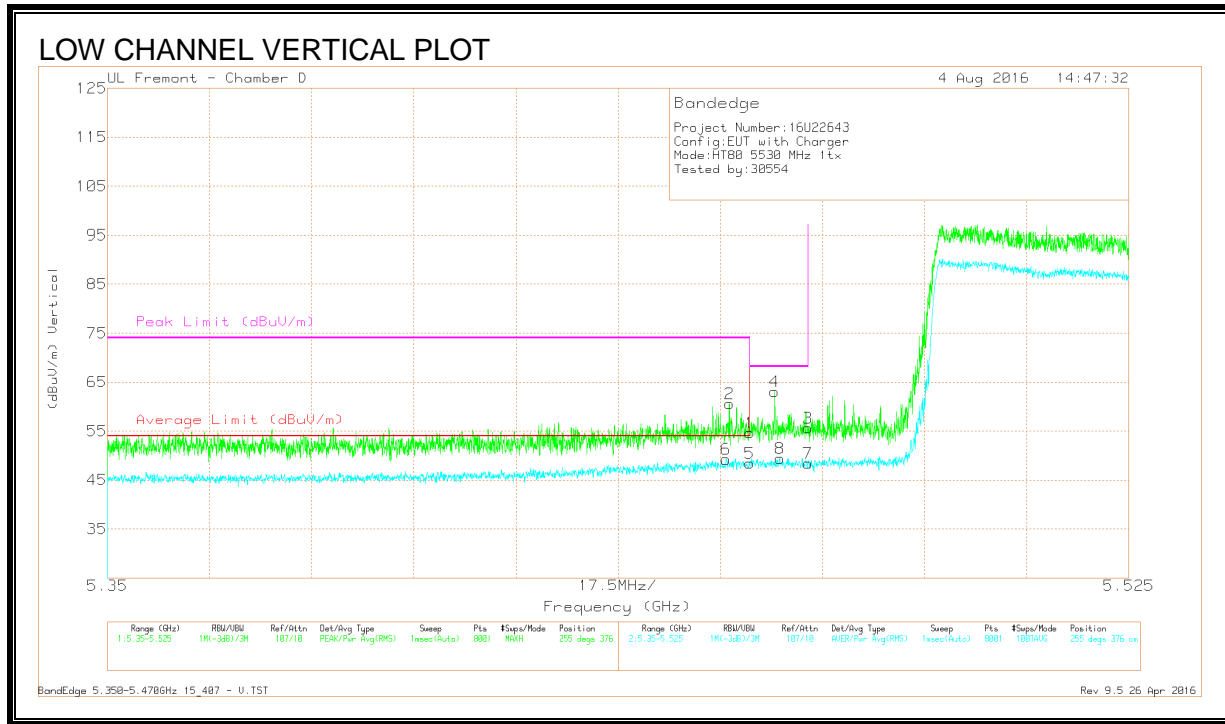

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.456	32.74	RMS	34.4	-17.9	.09	49.37	54	-4.63	-	-	255	376	V
2	* 5.457	44.09	Pk	34.4	-17.9	0	60.59	-	-	74	-13.41	255	376	V
1	* 5.46	38.09	Pk	34.4	-17.8	0	54.69	-	-	74	-19.31	255	376	V
5	* 5.46	31.79	RMS	34.4	-17.8	.09	48.52	54	-5.48	-	-	255	376	V
4	5.464	46.47	Pk	34.4	-17.8	0	63.07	-	-	68.2	-5.13	255	376	V
8	5.465	32.84	RMS	34.4	-17.8	.09	49.57	-	-	-	-	255	376	V
3	5.47	39.01	Pk	34.4	-17.8	0	55.61	-	-	68.2	-12.59	255	376	V
7	5.47	31.83	RMS	34.4	-17.8	.09	48.56	-	-	-	-	255	376	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

8.113. 802.11ac VHT80 2Tx (CHAIN 0 + CHAIN 1) CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

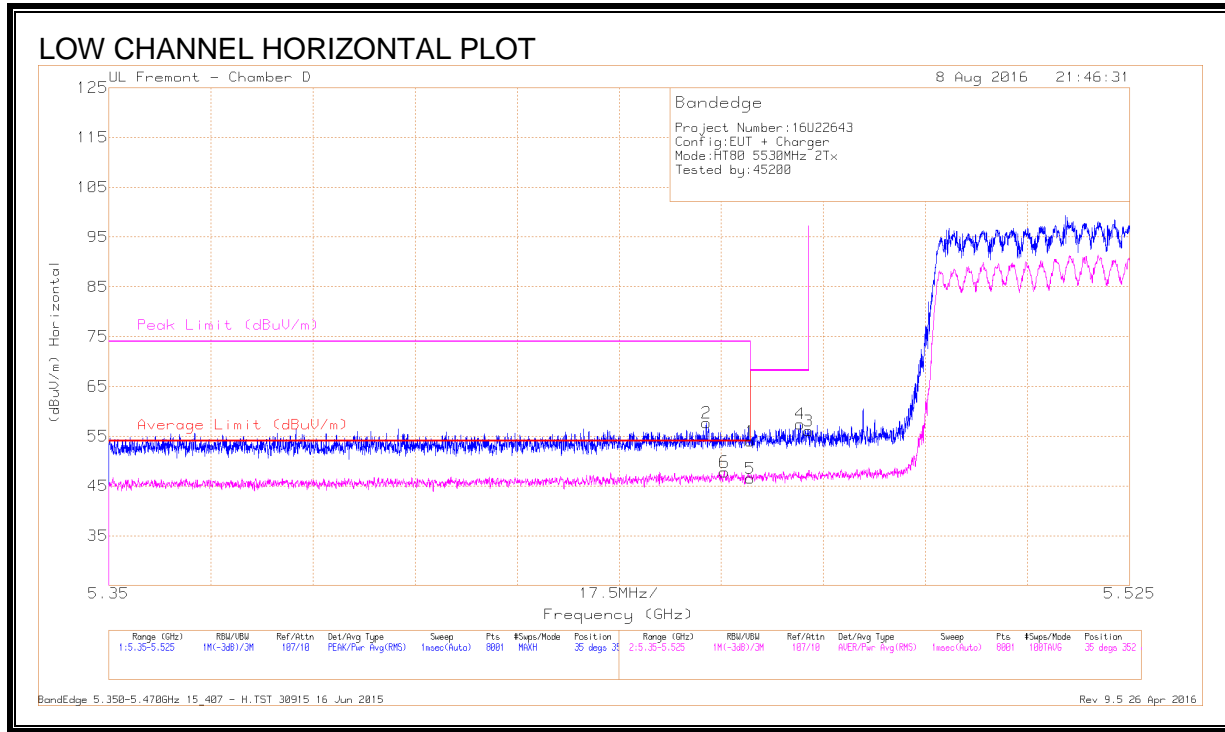


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.37	Pk	34.4	-17.8	0	53.97	-	-	74	-20.03	35	352	H
2	* 5.452	41.17	Pk	34.4	-17.9	0	57.67	-	-	74	-16.33	35	352	H
5	* 5.46	29.93	RMS	34.4	-17.8	.18	46.71	54	-7.29	-	-	35	352	H
6	* 5.456	31.28	RMS	34.4	-17.9	.18	47.96	54	-6.04	-	-	35	352	H
4	5.469	40.87	Pk	34.4	-17.8	0	57.47	-	-	68.2	-10.73	35	352	H
3	5.47	39.46	Pk	34.4	-17.8	0	56.06	-	-	68.2	-12.14	35	352	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

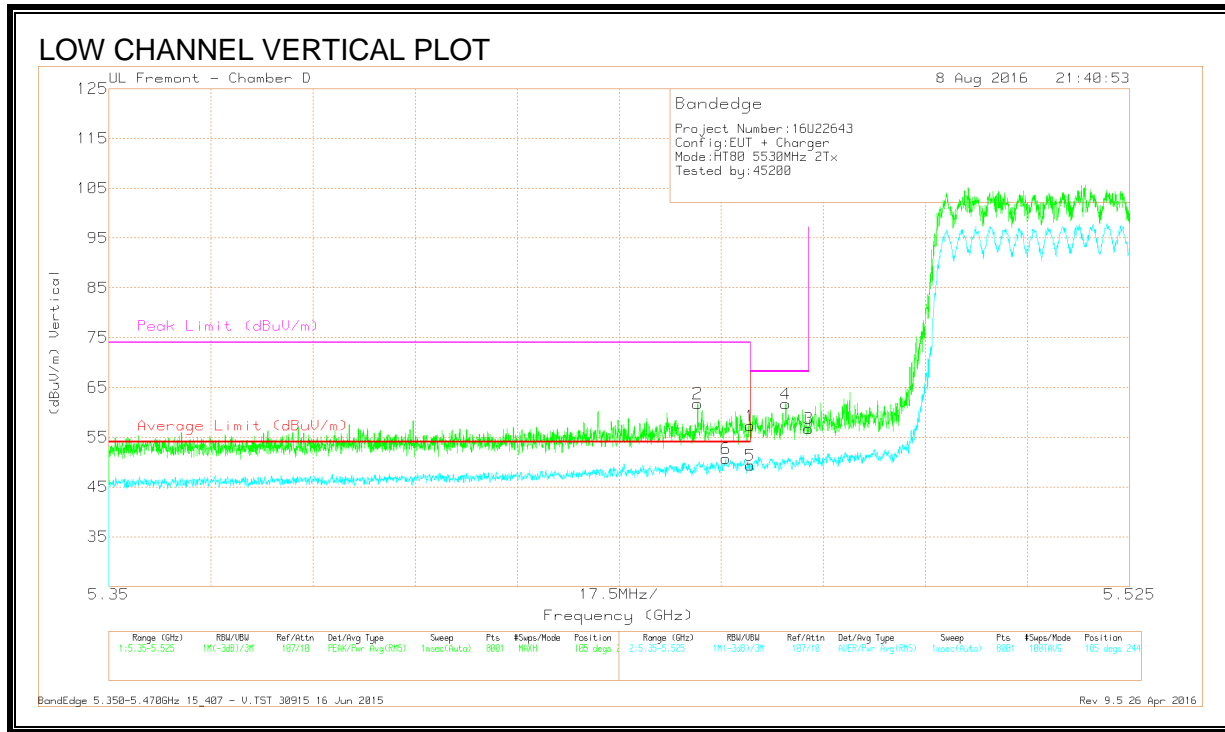


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.66	Pk	34.4	-17.8	0	57.26	-	-	74	-16.74	105	244	V
2	* 5.451	45.23	Pk	34.4	-17.9	0	61.73	-	-	74	-12.27	105	244	V
5	* 5.46	32.57	RMS	34.4	-17.8	.18	49.35	54	-4.65	-	-	105	244	V
6	* 5.456	34.01	RMS	34.4	-17.9	.18	50.69	54	-3.31	-	-	105	244	V
4	5.466	45.06	Pk	34.4	-17.8	0	61.66	-	-	68.2	-6.54	105	244	V
3	5.47	40.14	Pk	34.4	-17.8	0	56.74	-	-	68.2	-11.46	105	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

8.114. 802.11ac VHT80 2Tx (CHAIN 0 + CHAIN 1) STBC MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

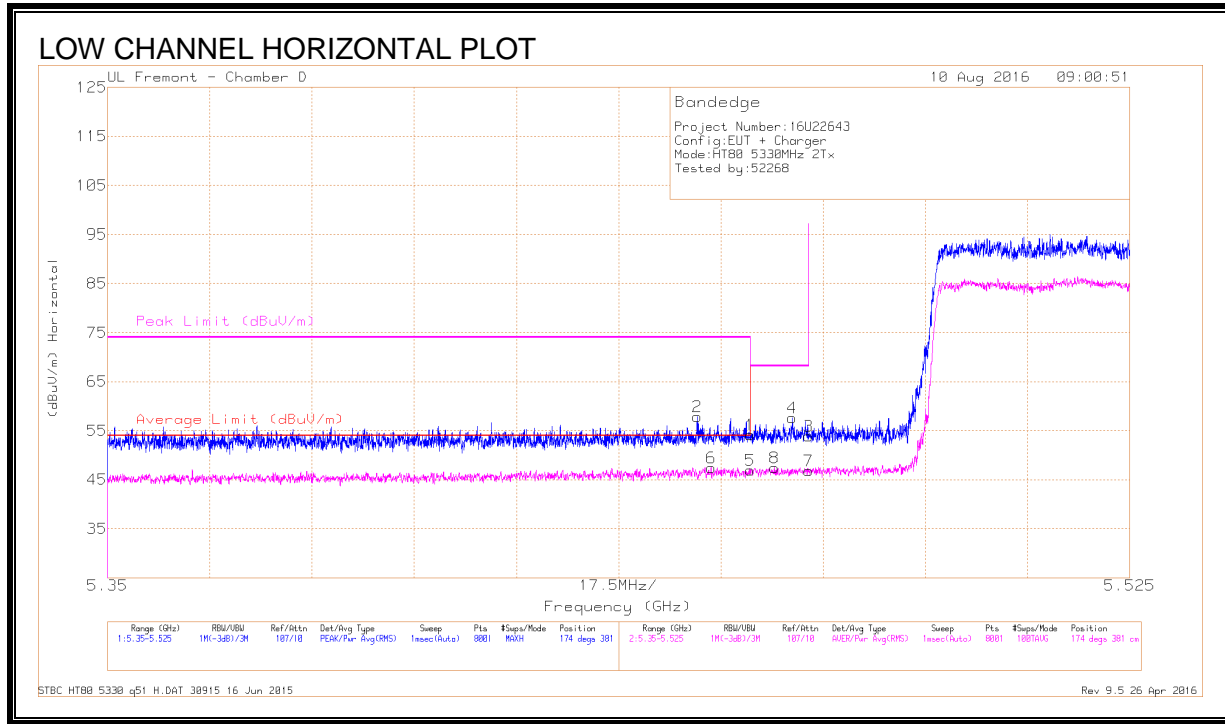


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.451	41.32	Pk	34.4	-17.9	0	57.82	-	-	74	-16.18	174	381	H
6	* 5.453	30.9	RMS	34.4	-17.9	.18	47.58	54	-6.42	-	-	174	381	H
1	* 5.46	37.52	Pk	34.4	-17.8	0	54.12	-	-	74	-19.88	174	381	H
5	* 5.46	30.33	RMS	34.4	-17.8	.18	47.11	54	-6.89	-	-	174	381	H
8	5.464	30.84	RMS	34.4	-17.8	.18	47.62	-	-	-	-	174	381	H
4	5.467	41.03	Pk	34.4	-17.8	0	57.63	-	-	68.2	-10.57	174	381	H
3	5.47	37.24	Pk	34.4	-17.8	0	53.84	-	-	68.2	-14.36	174	381	H
7	5.47	30.18	RMS	34.4	-17.8	.18	46.96	-	-	-	-	174	381	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

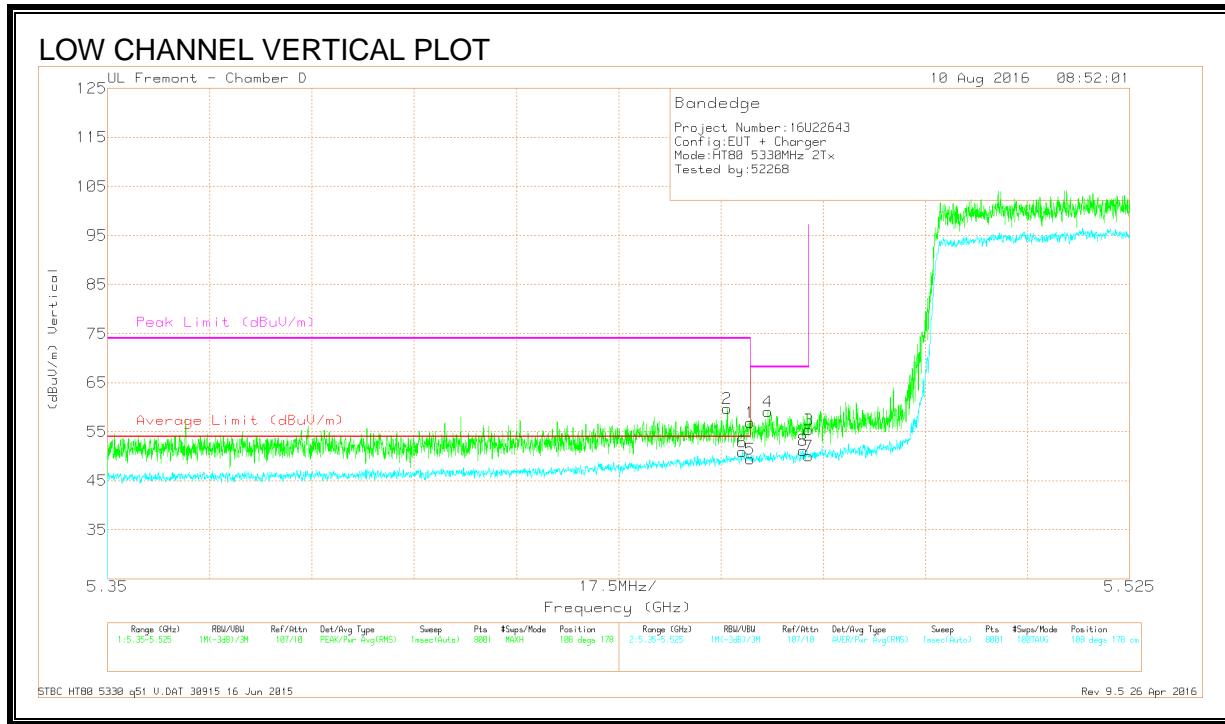

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.456	43.27	Pk	34.4	-17.9	0	59.77	-	-	74	-14.23	108	178	V
6	* 5.459	34.09	RMS	34.4	-17.8	.18	50.87	54	-3.13	-	-	108	178	V
1	* 5.46	40.24	Pk	34.4	-17.8	0	56.84	-	-	74	-17.16	108	178	V
5	* 5.46	32.65	RMS	34.4	-17.8	.18	49.43	54	-4.57	-	-	108	178	V
4	5.463	42.48	Pk	34.4	-17.8	0	59.08	-	-	68.2	-9.12	108	178	V
8	5.469	34.44	RMS	34.4	-17.8	.18	51.22	-	-	-	-	108	178	V
3	5.47	38.82	Pk	34.4	-17.8	0	55.42	-	-	68.2	-12.78	108	178	V
7	5.47	33.28	RMS	34.4	-17.8	.18	50.06	-	-	-	-	108	178	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

8.115. 802.11ac VHT80 2Tx (CHAIN 0 + CHAIN 1) BEAM FORMING MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

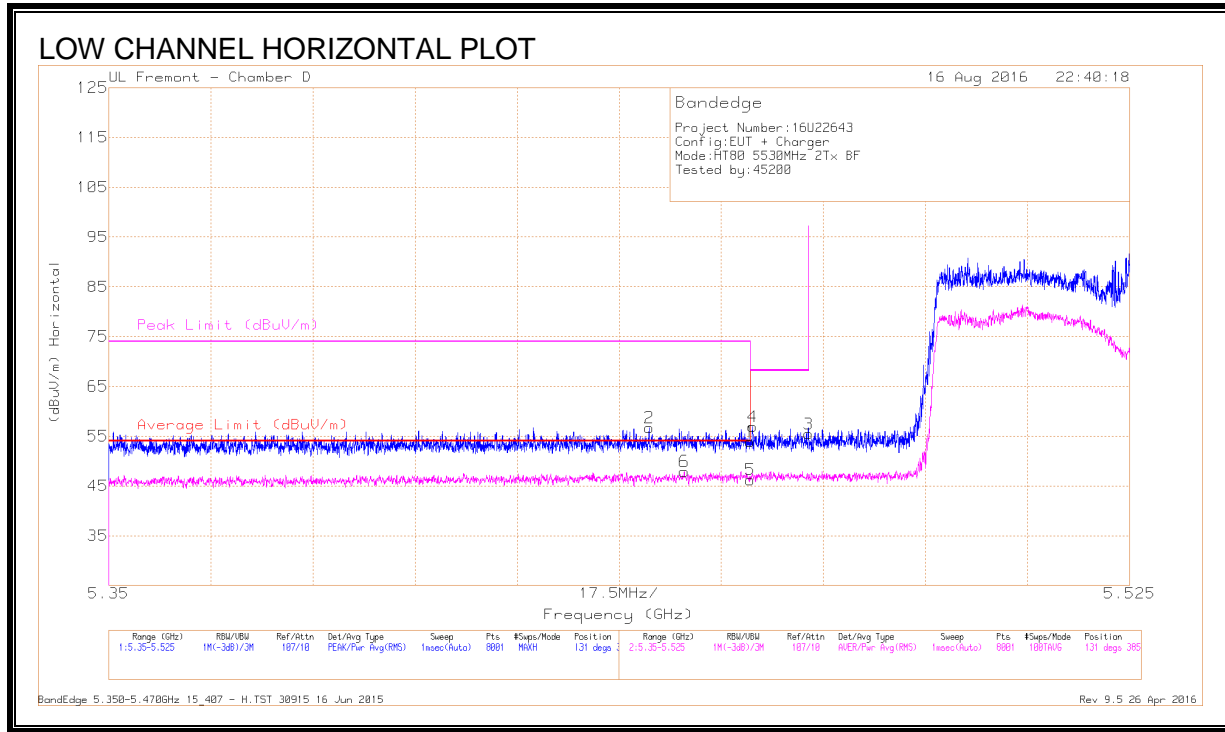


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.24	Pk	34.4	-17.8	0	53.84	-	-	74	-20.16	131	385	H
2	* 5.443	40.3	Pk	34.4	-18	0	56.7	-	-	74	-17.3	131	385	H
5	* 5.46	28.92	RMS	34.4	-17.8	.72	46.24	54	-7.76	-	-	131	385	H
6	* 5.449	30.68	RMS	34.4	-17.9	.72	47.9	54	-6.1	-	-	131	385	H
4	5.46	40.31	Pk	34.4	-17.8	0	56.91	-	-	68.2	-11.29	131	385	H
3	5.47	38.83	Pk	34.4	-17.8	0	55.43	-	-	68.2	-12.77	131	385	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

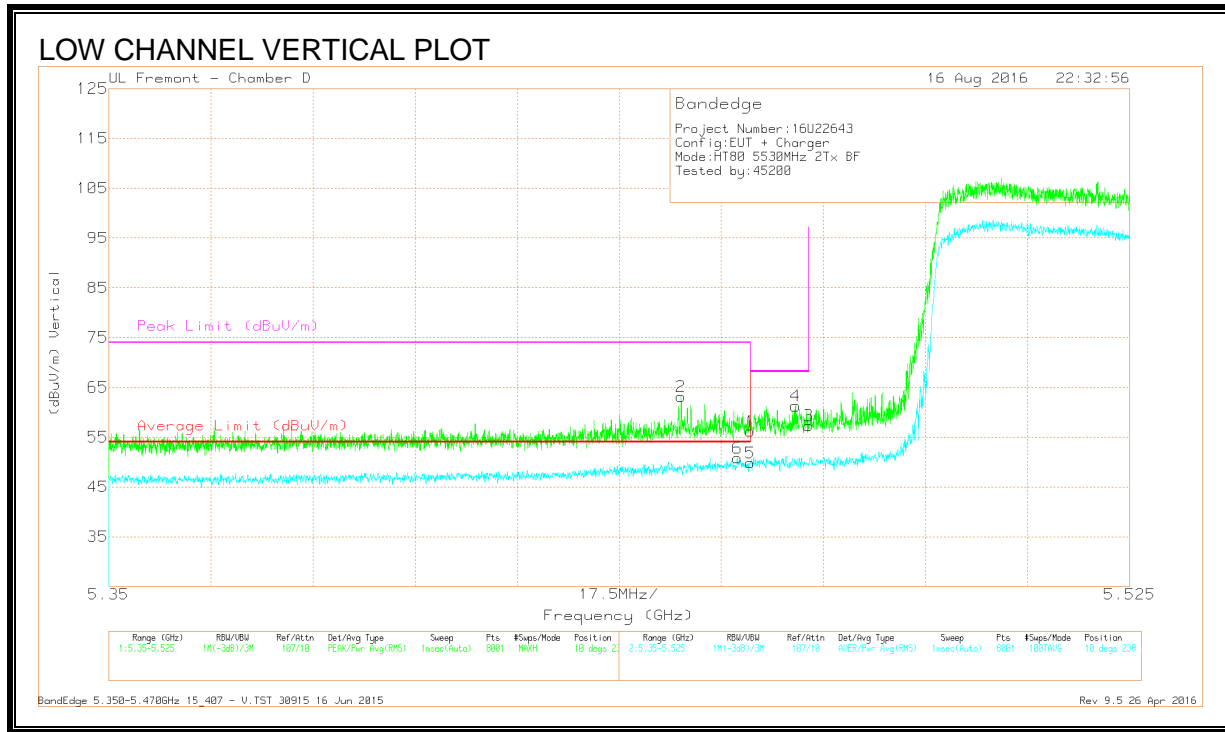


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.56	Pk	34.4	-17.8	0	56.16	-	-	74	-17.84	10	238	V
2	* 5.448	46.63	Pk	34.4	-17.9	0	63.13	-	-	74	-10.87	10	238	V
5	* 5.46	32.49	RMS	34.4	-17.8	.72	49.81	54	-4.19	-	-	10	238	V
6	* 5.458	33.57	RMS	34.4	-17.9	.72	50.79	54	-3.21	-	-	10	238	V
4	5.468	44.68	Pk	34.4	-17.8	0	61.28	-	-	68.2	-6.92	10	238	V
3	5.47	40.72	Pk	34.4	-17.8	0	57.32	-	-	68.2	-10.88	10	238	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

8.116. 802.11ac VHT80 2Tx (CHAIN 0 + CHAIN 2) CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

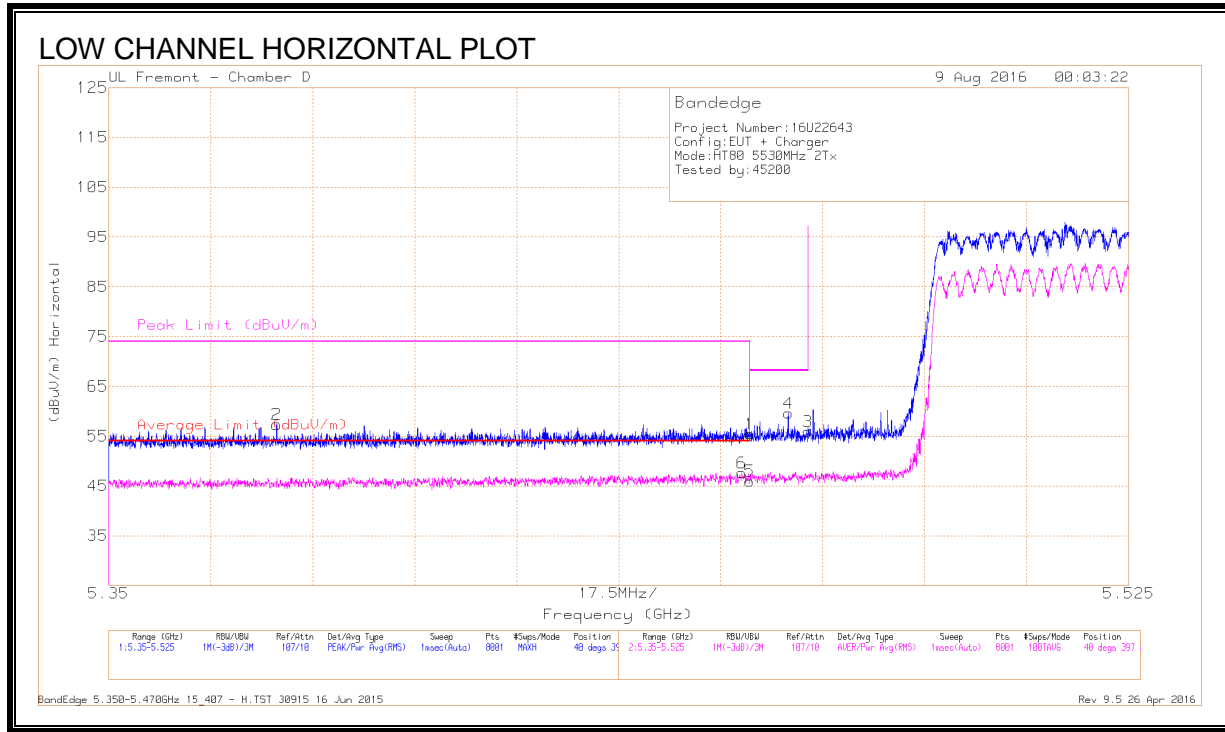


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.379	41.26	Pk	34.4	-18.3	0	57.36	-	-	74	-16.64	40	397	H
6	* 5.459	30.86	RMS	34.4	-17.8	.18	47.64	54	-6.36	-	-	40	397	H
1	* 5.46	38.83	Pk	34.4	-17.8	0	55.43	-	-	74	-18.57	40	397	H
5	* 5.46	29.2	RMS	34.4	-17.8	.18	45.98	54	-8.02	-	-	40	397	H
4	5.467	43.02	Pk	34.4	-17.8	0	59.62	-	-	68.2	-8.58	40	397	H
3	5.47	39.32	Pk	34.4	-17.8	0	55.92	-	-	68.2	-12.28	40	397	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

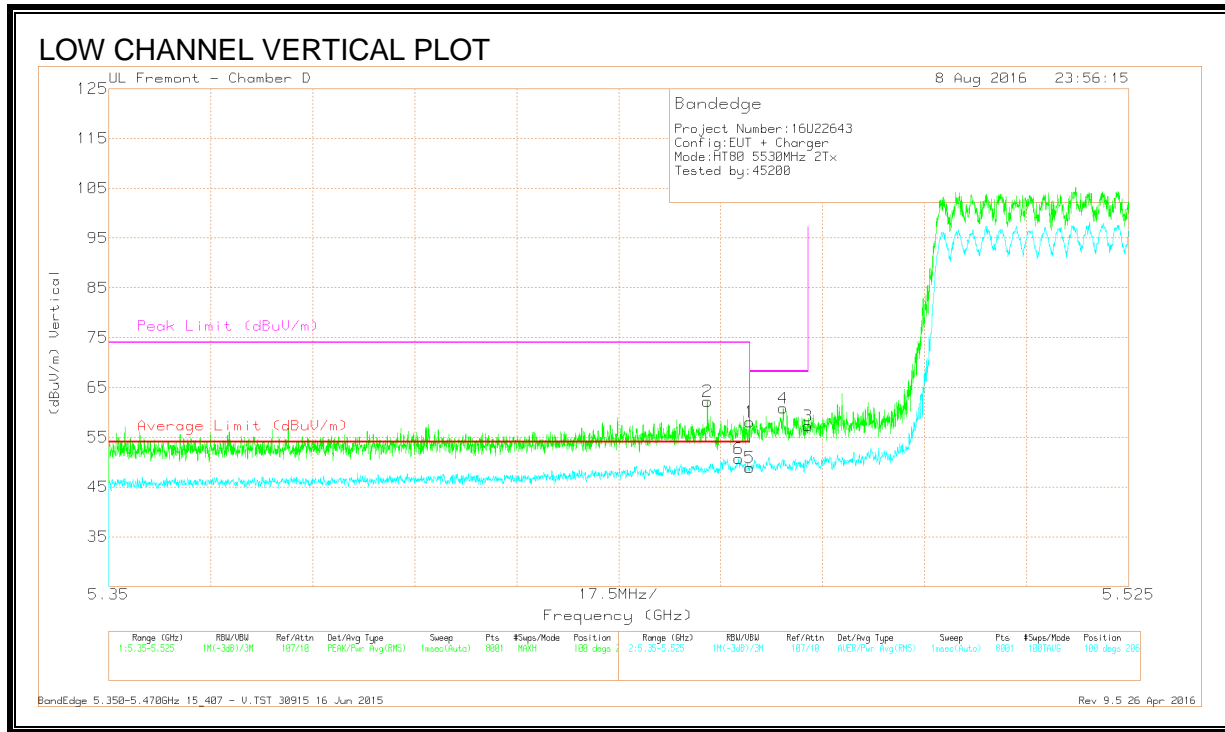

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.453	45.71	Pk	34.4	-17.9	0	62.21	-	-	74	-11.79	100	206	V
6	* 5.458	34	RMS	34.4	-17.9	.18	50.68	54	-3.32	-	-	100	206	V
1	* 5.46	41.46	Pk	34.4	-17.8	0	58.06	-	-	74	-15.94	100	206	V
5	* 5.46	32.12	RMS	34.4	-17.8	.18	48.9	54	-5.1	-	-	100	206	V
4	5.466	44.2	Pk	34.4	-17.8	0	60.8	-	-	68.2	-7.4	100	206	V
3	5.47	40.66	Pk	34.4	-17.8	0	57.26	-	-	68.2	-10.94	100	206	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

8.117. 802.11ac VHT80 2Tx (CHAIN 0 + CHAIN 2) STBC MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

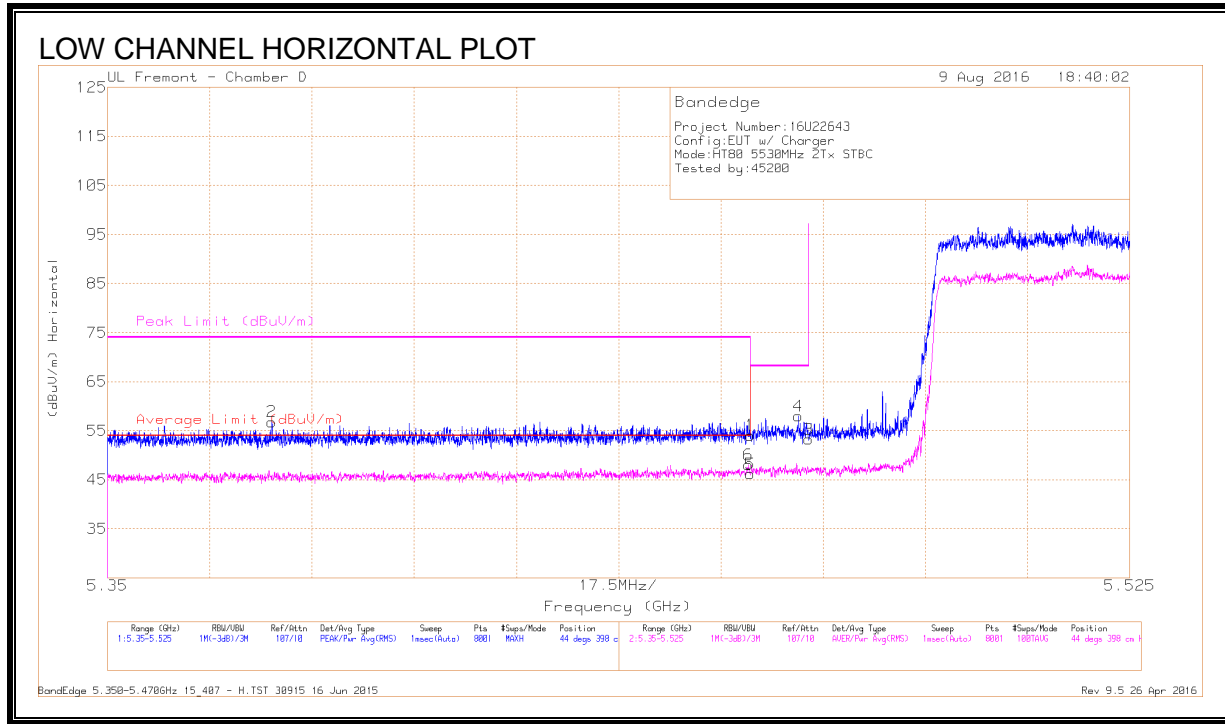


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.378	40.71	Pk	34.4	-18.3	0	56.81	-	-	74	-17.19	44	398	H
1	* 5.46	37.48	Pk	34.4	-17.8	0	54.08	-	-	74	-19.92	44	398	H
5	* 5.46	29.39	RMS	34.4	-17.8	.18	46.17	54	-7.83	-	-	44	398	H
6	* 5.46	31.29	RMS	34.4	-17.8	.18	48.07	54	-5.93	-	-	44	398	H
4	5.468	41.38	Pk	34.4	-17.8	0	57.98	-	-	68.2	-10.22	44	398	H
3	5.47	36.71	Pk	34.4	-17.8	0	53.31	-	-	68.2	-14.89	44	398	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

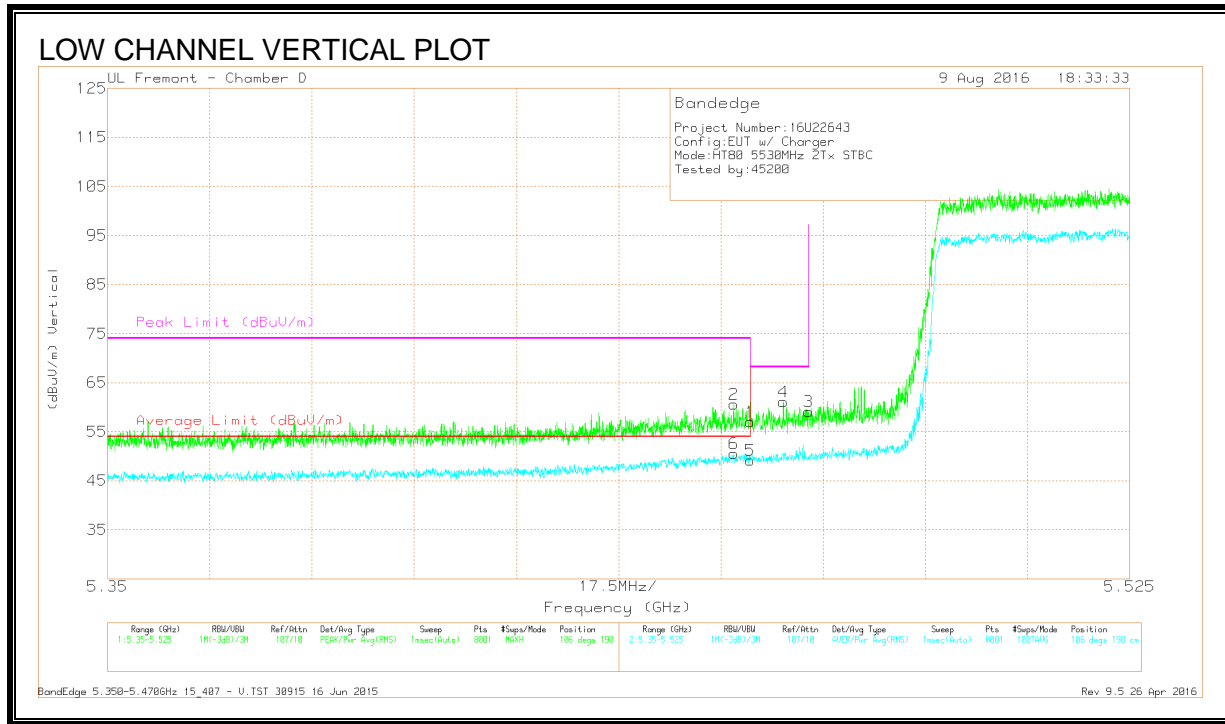

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.457	44.08	Pk	34.4	-17.9	0	60.58	-	-	74	-13.42	106	190	V
6	* 5.457	33.81	RMS	34.4	-17.9	.18	50.49	54	-3.51	-	-	106	190	V
1	* 5.46	40.4	Pk	34.4	-17.8	0	57	-	-	74	-17	106	190	V
5	* 5.46	32.41	RMS	34.4	-17.8	.18	49.19	54	-4.81	-	-	106	190	V
4	5.466	44.55	Pk	34.4	-17.8	0	61.15	-	-	68.2	-7.05	106	190	V
3	5.47	42.53	Pk	34.4	-17.8	0	59.13	-	-	68.2	-9.07	106	190	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


8.118. 802.11ac VHT80 2Tx (CHAIN 0 + CHAIN 2) BEAM FORMING MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

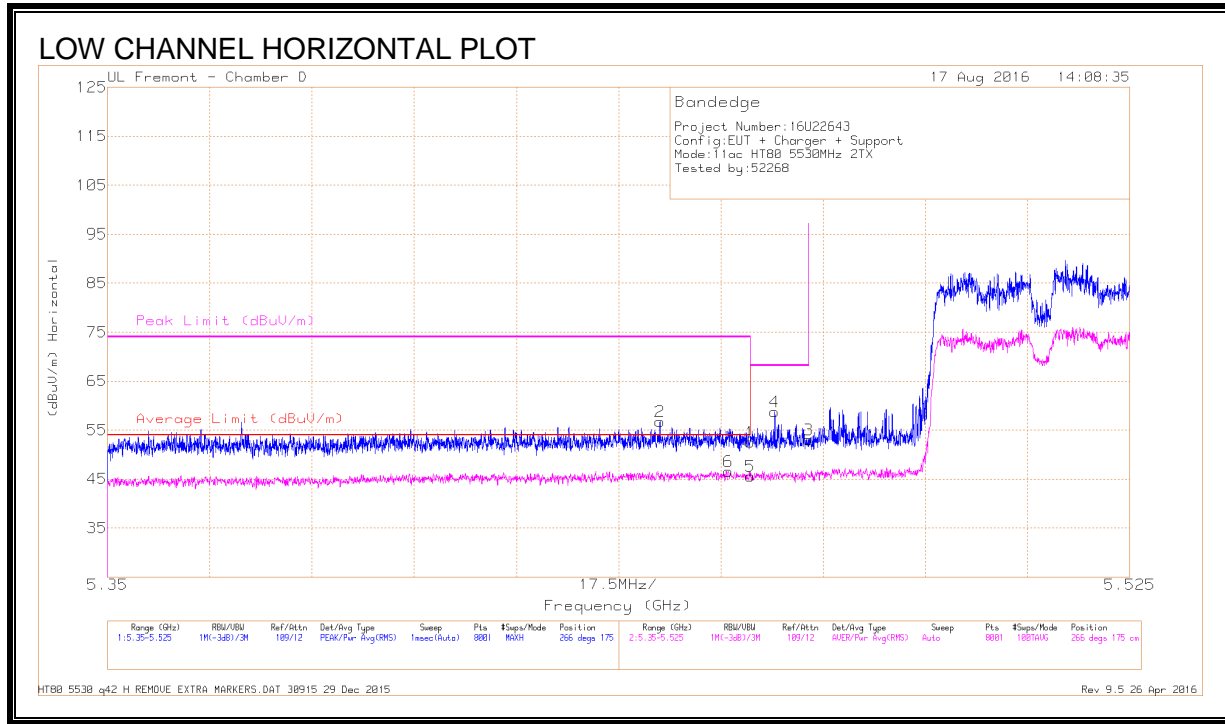

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Filtr/Power (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.85	Pk	34.4	-19.7	0	52.55	-	-	74	-21.45	266	175	H
2	* 5.445	41.9	Pk	34.4	-19.6	0	56.7	-	-	74	-17.3	266	175	H
5	* 5.46	30.91	RMS	34.4	-19.7	.72	46.33	54	-7.67	-	-	266	175	H
6	* 5.456	31.91	RMS	34.4	-19.7	.72	47.33	54	-6.67	-	-	266	175	H
4	5.464	44.19	Pk	34.4	-19.8	0	58.79	-	-	68.2	-9.41	266	175	H
3	5.47	38.37	Pk	34.4	-19.7	0	53.07	-	-	68.2	-15.13	266	175	H

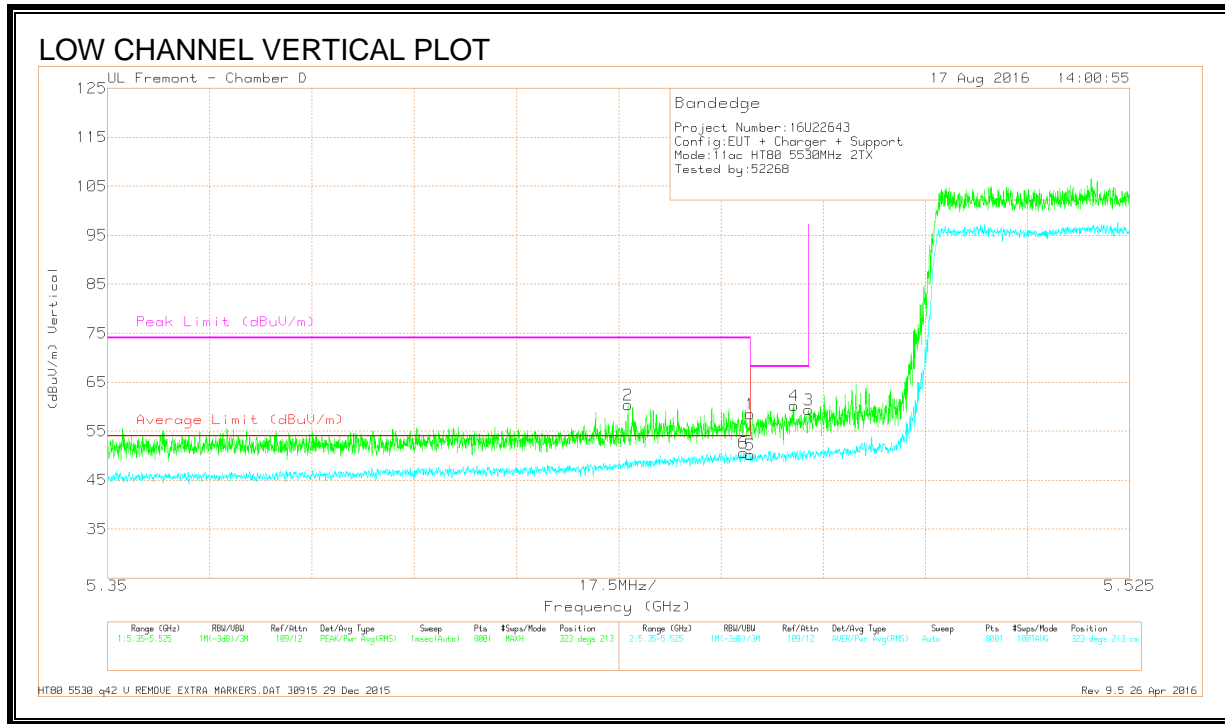

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fitr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Marg in (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimu th (Degs)	Heig ht (cm)	Polari ty
1	* 5.46	43.78	Pk	34.4	-19.7	0	58.48	-	-	74	-15.52	323	213	V
2	* 5.439	45.4	Pk	34.4	-19.5	0	60.3	-	-	74	-13.7	323	213	V
5	* 5.46	34.73	RMS	34.4	-19.7	.72	50.15	54	-3.85	-	-	323	213	V
6	* 5.459	35.18	RMS	34.4	-19.7	.72	50.6	54	-3.4	-	-	323	213	V
4	5.467	45.5	Pk	34.4	-19.7	0	60.2	-	-	68.2	-8	323	213	V
3	5.47	44.66	Pk	34.4	-19.7	0	59.36	-	-	68.2	-8.84	323	213	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

8.119. 802.11ac VHT80 2Tx (CHAIN 1 + CHAIN 2) CDD MODE IN THE 5.6 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL)

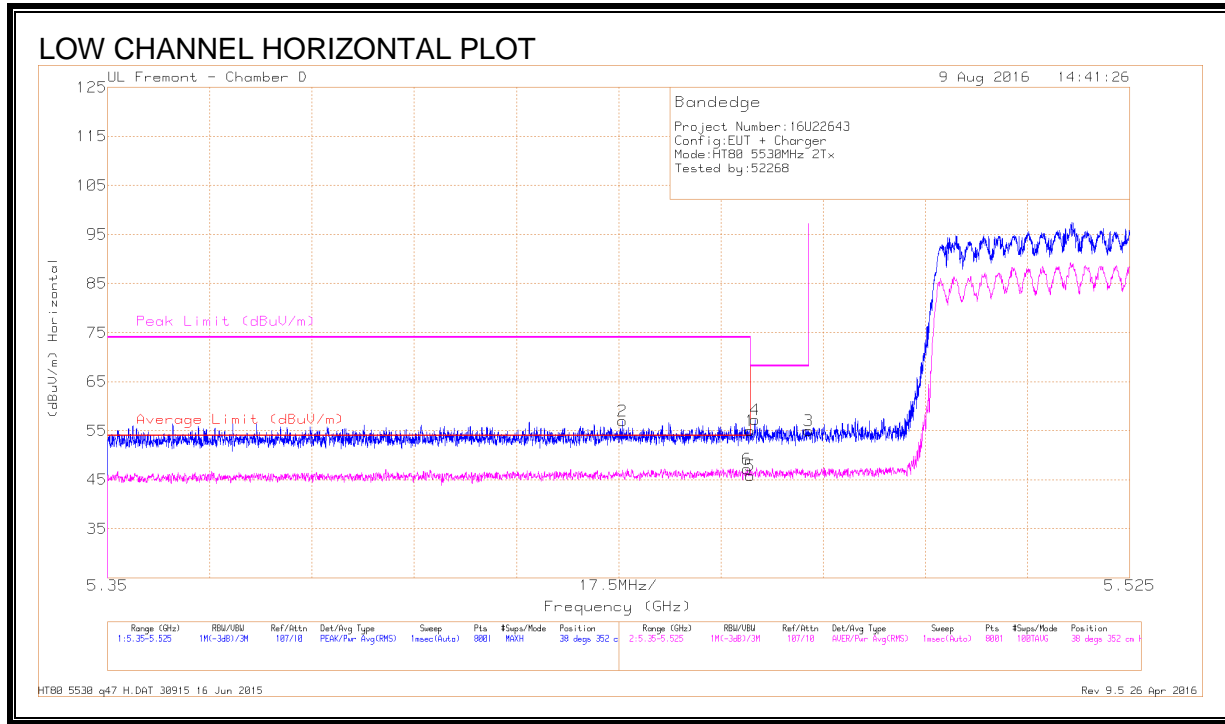

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.438	40.54	Pk	34.4	-18	0	56.94	-	-	74	-17.06	38	352	H
1	* 5.46	38.44	PK	34.4	-17.8	0	55.04	-	-	74	-18.96	38	352	H
5	* 5.46	29	RMS	34.4	-17.8	.18	45.78	54	-8.22	-	-	38	352	H
6	* 5.46	30.42	RMS	34.4	-17.8	.18	47.2	54	-6.8	-	-	38	352	H
4	5.461	40.65	PK	34.4	-17.8	0	57.25	-	-	68.2	-10.95	38	352	H
3	5.47	38.36	PK	34.4	-17.8	0	54.96	-	-	68.2	-13.24	38	352	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

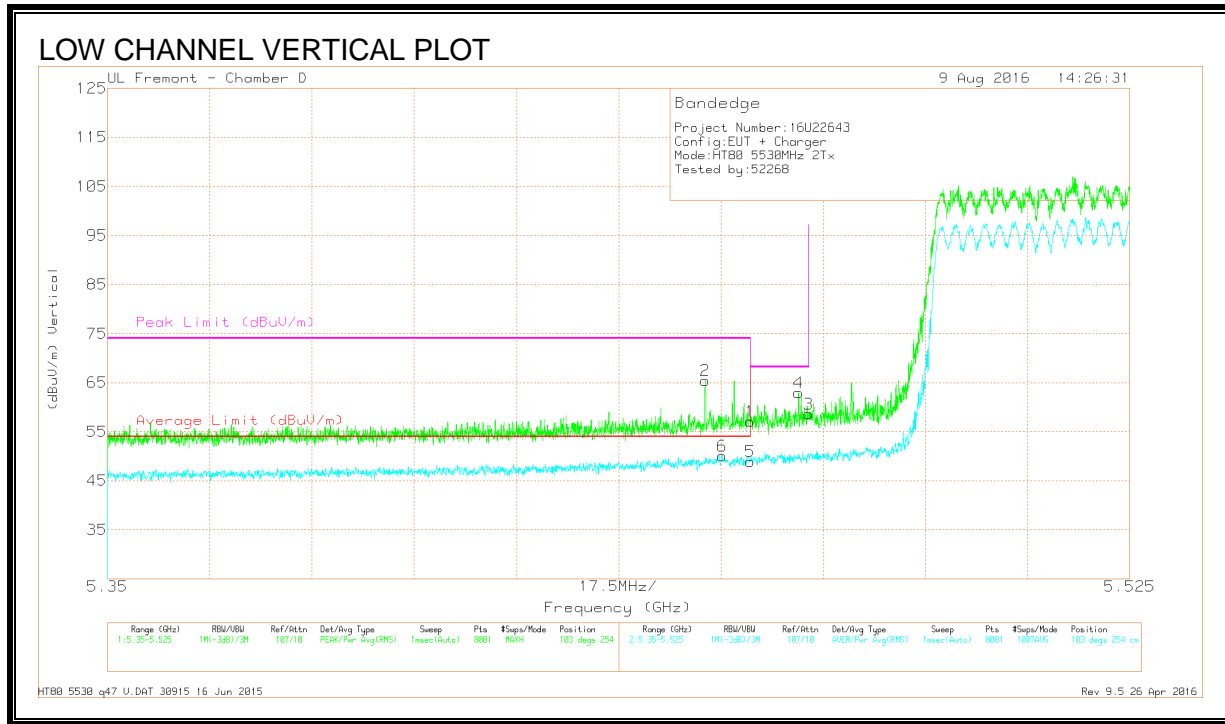

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.452	48.91	Pk	34.4	-17.9	0	65.41	-	-	74	-8.59	103	254	V
6	* 5.455	33.59	RMS	34.4	-17.9	.18	50.27	54	-3.73	-	-	103	254	V
1	* 5.46	40.53	Pk	34.4	-17.8	0	57.13	-	-	74	-16.87	103	254	V
5	* 5.46	32.34	RMS	34.4	-17.8	.18	49.12	54	-4.88	-	-	103	254	V
4	5.468	46.4	Pk	34.4	-17.8	0	63	-	-	68.2	-5.2	103	254	V
3	5.47	42.05	Pk	34.4	-17.8	0	58.65	-	-	68.2	-9.55	103	254	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

8.120. 802.11ac VHT80 2Tx (CHAIN 1 + CHAIN 2) STBC MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

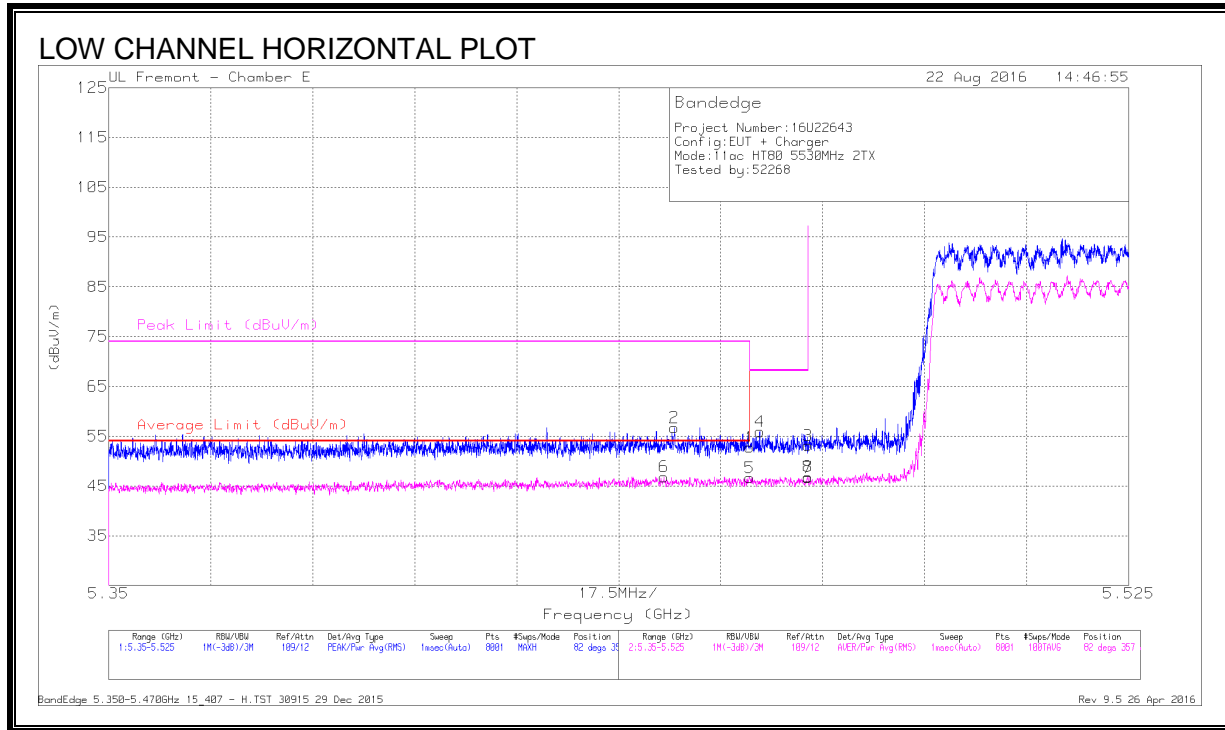


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.445	31.86	RMS	34.4	-19.6	.18	46.84	54	-7.16	-	-	82	357	H
2	* 5.447	41.93	Pk	34.4	-19.6	0	56.73	-	-	74	-17.27	82	357	H
1	* 5.46	38.07	Pk	34.4	-19.7	0	52.77	-	-	74	-21.23	82	357	H
5	* 5.46	31.79	RMS	34.4	-19.7	.18	46.67	54	-7.33	-	-	82	357	H
4	5.462	41.21	Pk	34.4	-19.7	0	55.91	-	-	68.2	-12.29	82	357	H
3	5.47	38.42	Pk	34.4	-19.7	0	53.12	-	-	68.2	-15.08	82	357	H
7	5.47	31.83	RMS	34.4	-19.7	.18	46.71	-	-	-	-	82	357	H
8	5.47	31.96	RMS	34.4	-19.7	.18	46.84	-	-	-	-	82	357	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

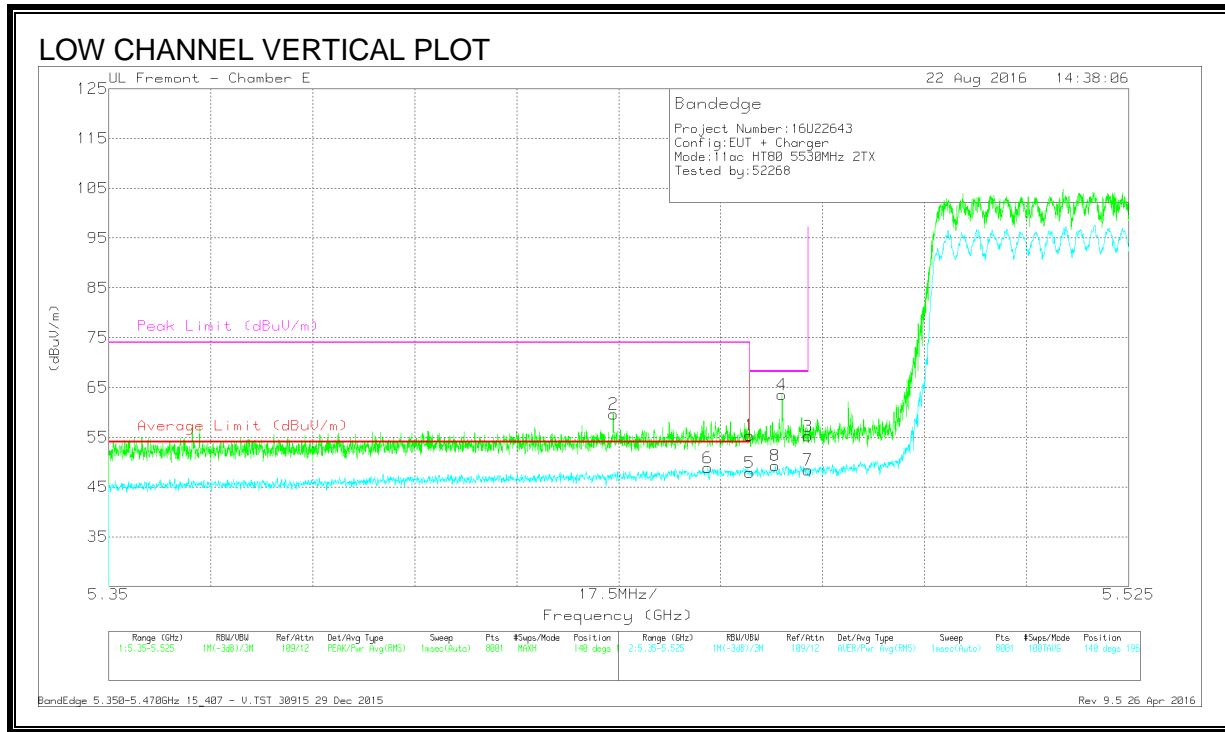

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.437	44.86	Pk	34.4	-19.6	0	59.66	-	-	74	-14.34	140	196	V
6	* 5.453	33.96	RMS	34.4	-19.7	.18	48.84	54	-5.16	-	-	140	196	V
1	* 5.46	40.69	Pk	34.4	-19.7	0	55.39	-	-	74	-18.61	140	196	V
5	* 5.46	32.97	RMS	34.4	-19.7	.18	47.85	54	-6.15	-	-	140	196	V
8	5.464	34.5	RMS	34.4	-19.8	.18	49.28	-	-	-	-	140	196	V
4	5.466	48.95	Pk	34.4	-19.8	0	63.55	-	-	68.2	-4.65	140	196	V
3	5.47	40.52	Pk	34.4	-19.7	0	55.22	-	-	68.2	-12.98	140	196	V
7	5.47	33.52	RMS	34.4	-19.7	.18	48.4	-	-	-	-	140	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
 RMS - RMS detection

8.121. 802.11ac VHT80 2Tx (CHAIN 1 + CHAIN 2) BEAM FORMING MODE IN THE 5.6 GHZ BAND

RESTRICTED BANDEGE (LOW CHANNEL)

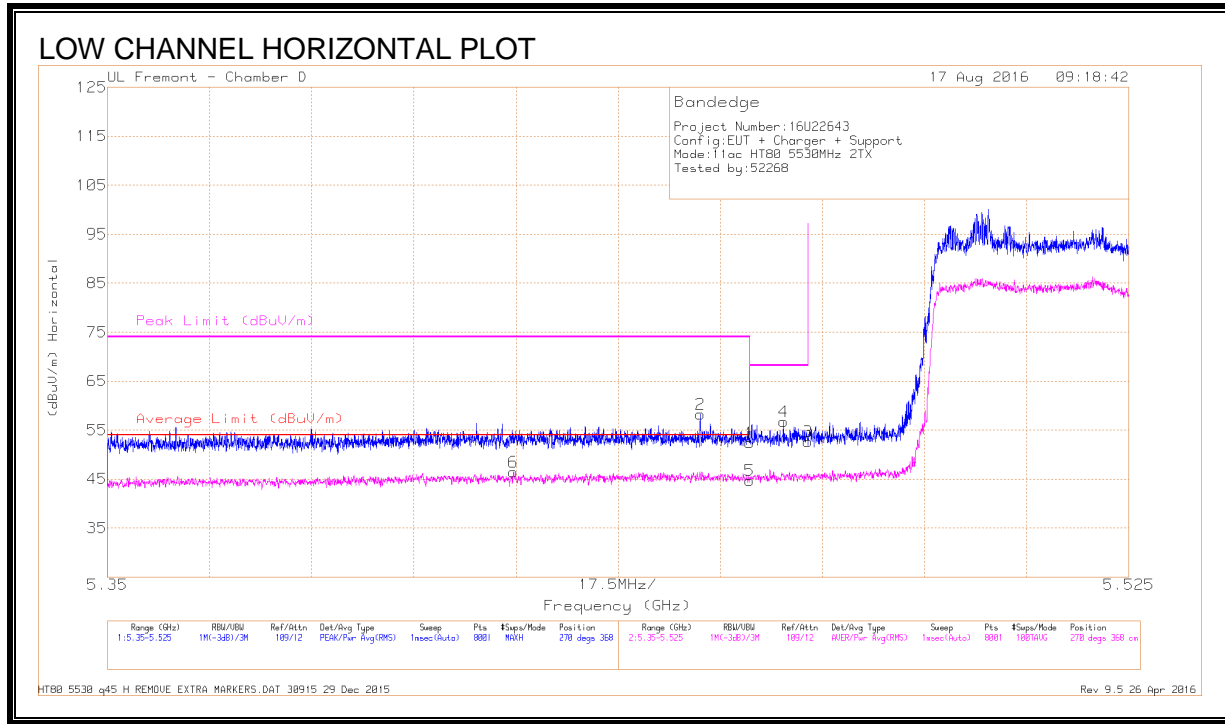


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.42	31.63	RMS	34.4	-19.6	.72	47.13	54	-6.87	-	-	270	368	H
2	* 5.452	43.49	Pk	34.4	-19.6	0	58.29	-	-	74	-15.71	270	368	H
1	* 5.46	37.67	Pk	34.4	-19.7	0	52.37	-	-	74	-21.63	270	368	H
5	* 5.46	30.04	RMS	34.4	-19.7	.72	45.46	54	-8.56	-	-	270	368	H
4	5.466	42.15	Pk	34.4	-19.8	0	56.75	-	-	68.2	-11.45	270	368	H
3	5.47	37.97	Pk	34.4	-19.7	0	52.67	-	-	68.2	-15.53	270	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

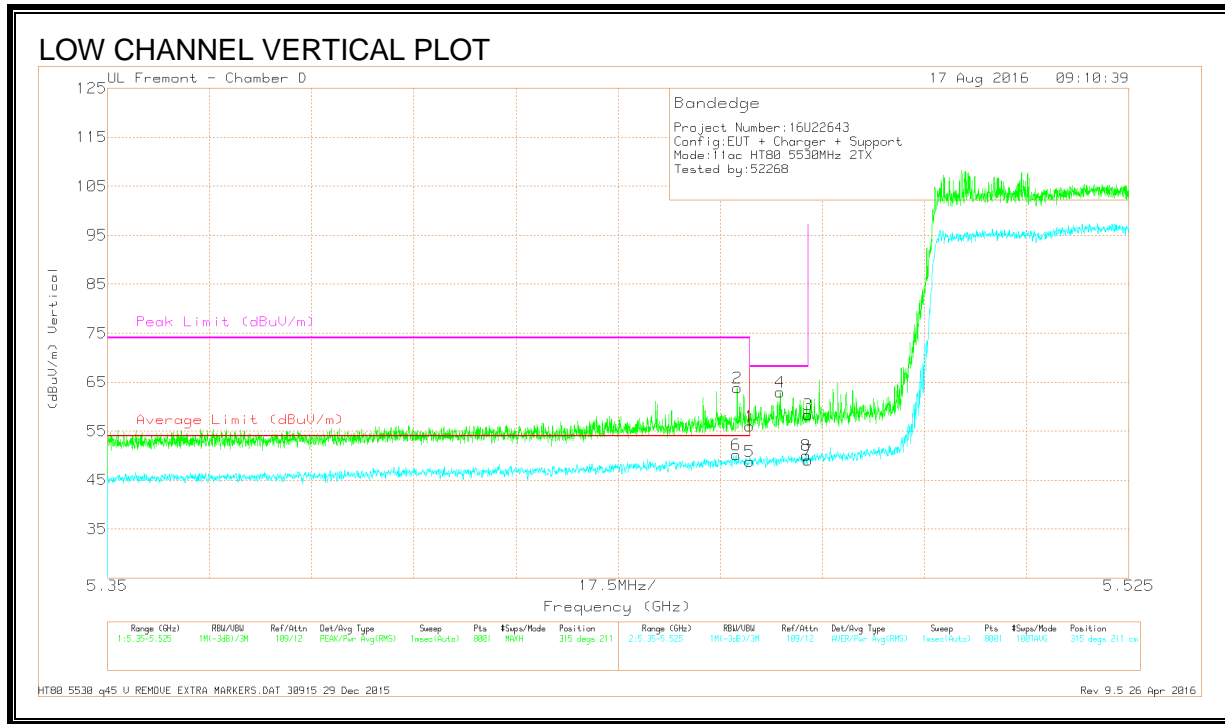

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.458	49.12	Pk	34.4	-19.7	0	63.82	-	-	74	-10.18	315	211	V
6	* 5.458	34.74	RMS	34.4	-19.7	.72	50.16	54	-3.84	-	-	315	211	V
1	* 5.46	41.35	Pk	34.4	-19.7	0	56.05	-	-	74	-17.95	315	211	V
5	* 5.46	33.4	RMS	34.4	-19.7	.72	48.82	54	-5.18	-	-	315	211	V
4	5.465	48.3	Pk	34.4	-19.8	0	62.9	-	-	68.2	-5.3	315	211	V
3	5.47	43.71	Pk	34.4	-19.7	0	58.41	-	-	68.2	-9.79	315	211	V
7	5.47	33.62	RMS	34.4	-19.7	.72	49.04	-	-	-	-	315	211	V
8	5.47	34.57	RMS	34.4	-19.7	.72	49.99	-	-	-	-	315	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector
 RMS - RMS detection

8.122. 802.11ac VHT80 3Tx CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

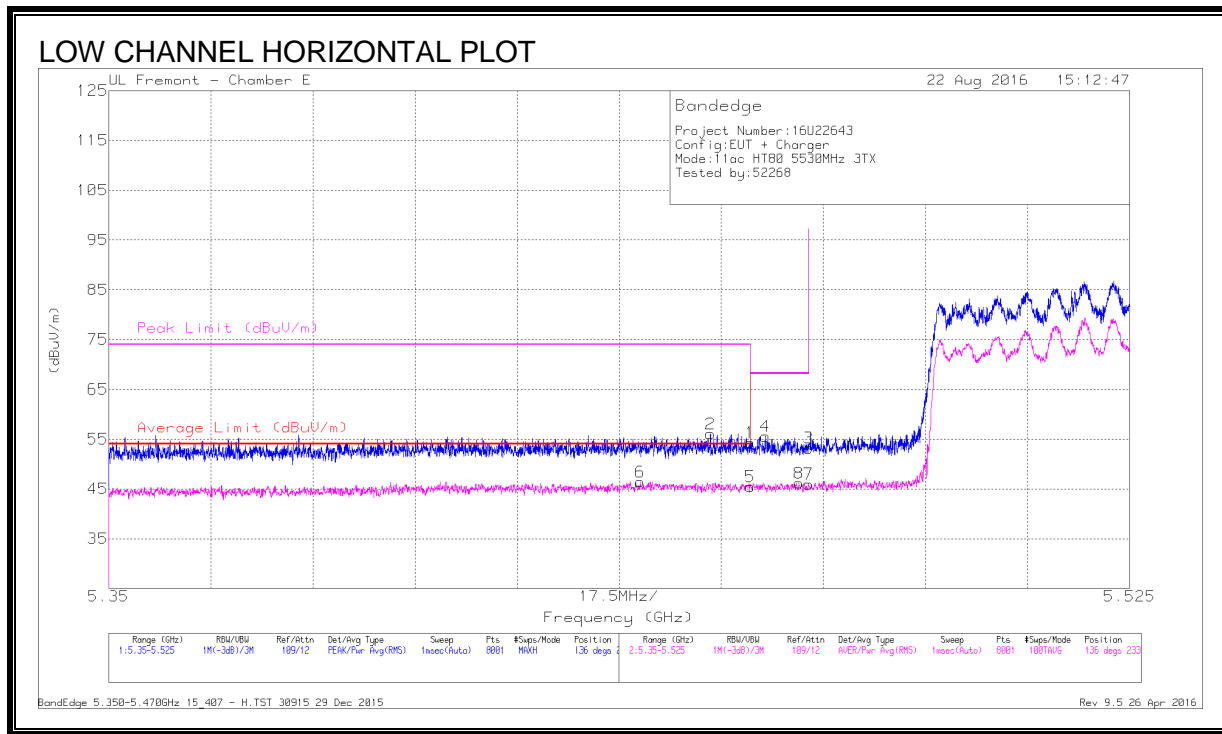


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.58	Pk	34.4	-19.7	0	54.28	-	-	74	-19.72	136	233	H
2	* 5.453	41.36	Pk	34.4	-19.7	0	56.06	-	-	74	-17.94	136	233	H
5	* 5.46	30.76	RMS	34.4	-19.7	.18	45.64	54	-8.36	-	-	136	233	H
6	* 5.441	31.53	RMS	34.4	-19.5	.18	46.61	54	-7.39	-	-	136	233	H
4	5.463	40.84	Pk	34.4	-19.7	0	55.54	-	-	68.2	-12.66	136	233	H
8	5.468	31.48	RMS	34.4	-19.7	.18	46.18	-	-	-	-	136	233	H
3	5.47	38.52	Pk	34.4	-19.7	0	53.22	-	-	68.2	-14.98	136	233	H
7	5.47	31.27	RMS	34.4	-19.7	.18	45.97	-	-	-	-	136	233	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

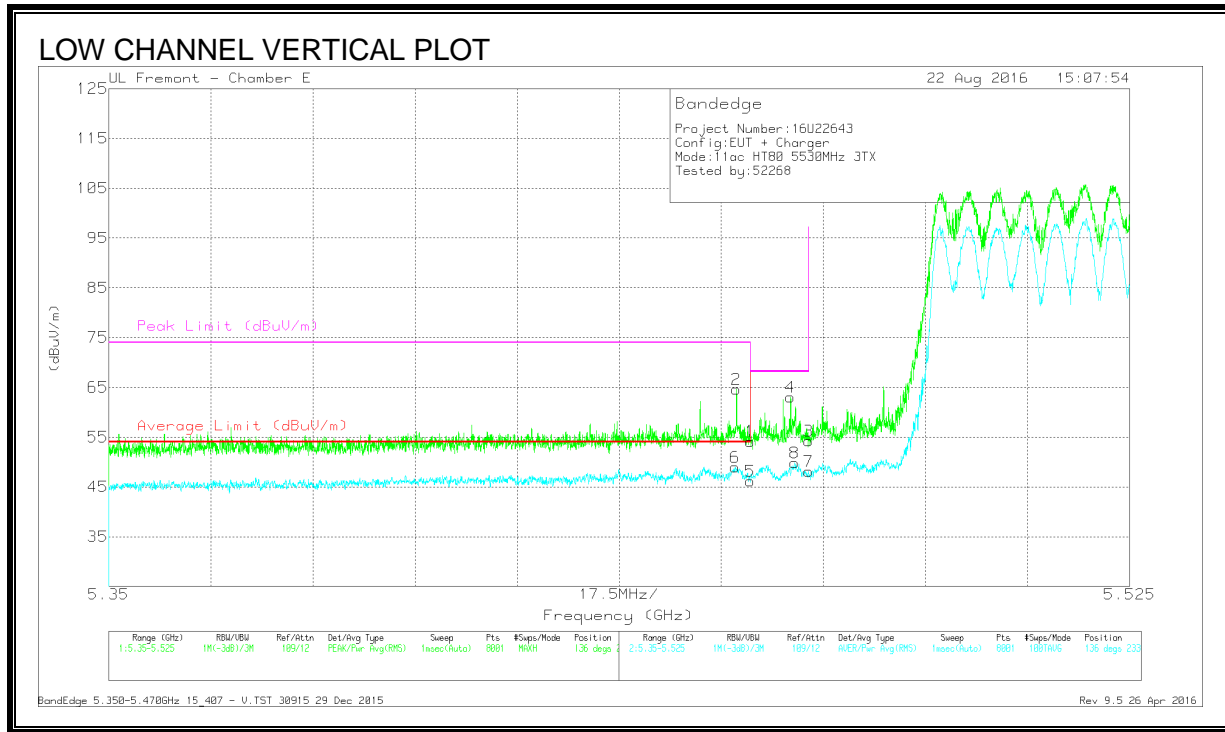

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.46	PK	34.4	-19.7	0	54.16	-	-	74	-19.84	136	233	V
2	* 5.458	49.91	PK	34.4	-19.7	0	64.61	-	-	74	-9.39	136	233	V
5	* 5.46	31.27	RMS	34.4	-19.7	.18	46.15	54	-7.85	-	-	136	233	V
6	* 5.457	34.07	RMS	34.4	-19.7	.18	48.95	54	-5.05	-	-	136	233	V
4	5.467	48.3	PK	34.4	-19.7	0	63	-	-	68.2	-5.2	136	233	V
8	5.468	34.95	RMS	34.4	-19.7	.18	49.83	-	-	-	-	136	233	V
3	5.47	39.53	PK	34.4	-19.7	0	54.23	-	-	68.2	-13.97	136	233	V
7	5.47	33.23	RMS	34.4	-19.7	.18	48.11	-	-	-	-	136	233	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

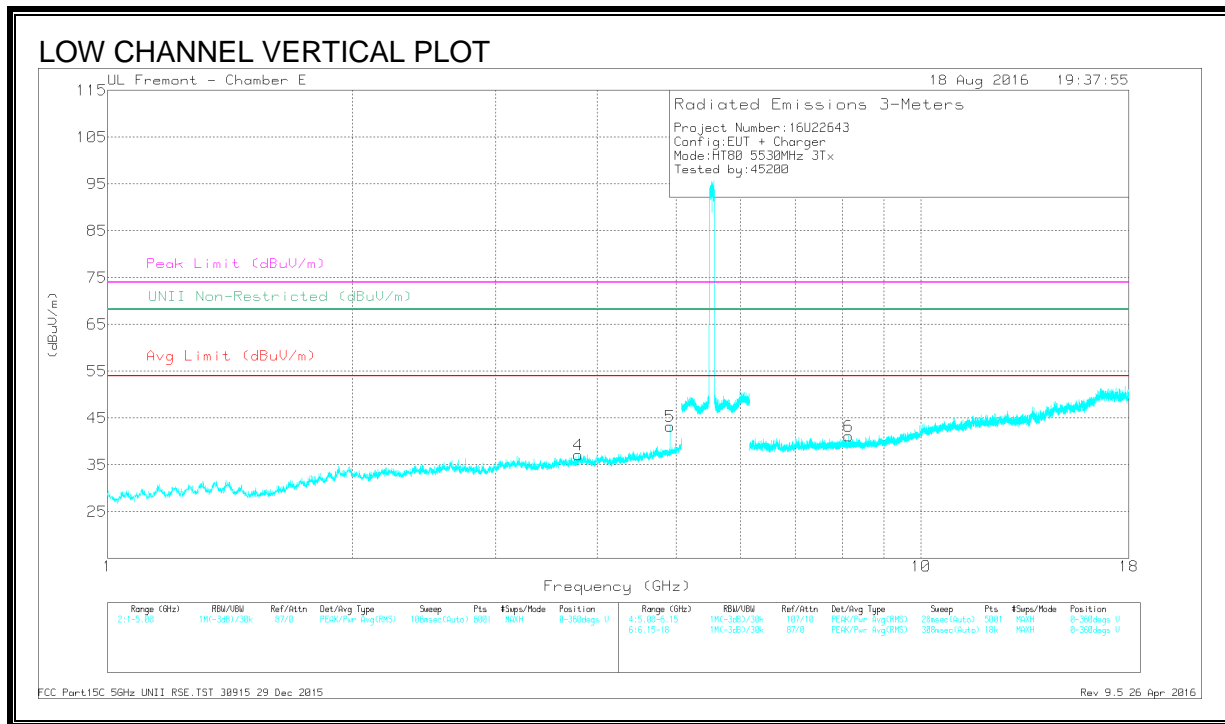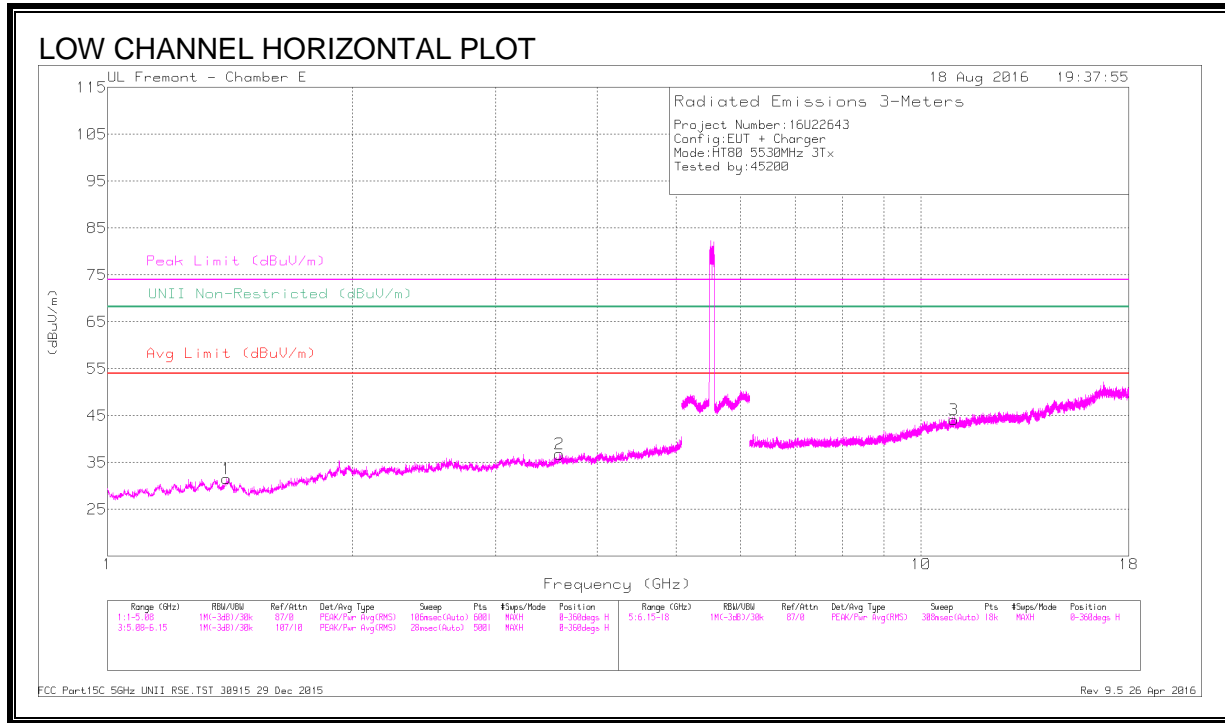

DATA



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarity
* 1.4	44.14	PK-U	29.1	-34.7	0	38.54	-	-	74	-35.46	-	-	253	399	H
* 1.402	32.9	ADR	29	-34.7	.18	27.38	54	-26.62	-	-	-	-	253	399	H
* 3.595	40.79	PK-U	33	-30.7	0	43.09	-	-	74	-30.91	-	-	114	233	H
* 3.592	29.72	ADR	33	-30.7	.18	32.2	54	-21.8	-	-	-	-	114	233	H
* 3.79	39.94	PK-U	33.1	-30.5	0	42.54	-	-	74	-31.46	-	-	308	353	V
* 3.789	29.64	ADR	33.1	-30.6	.18	32.32	54	-21.68	-	-	-	-	308	353	V
* 4.916	44.18	PK-U	34	-29.5	0	48.68	-	-	74	-25.32	-	-	141	275	V
* 4.916	37.5	ADR	34	-29.5	.18	42.18	54	-11.82	-	-	-	-	141	275	V
* 10.966	35.21	PK-U	38	-23.1	0	50.11	-	-	74	-23.89	-	-	62	166	H
* 10.965	25.07	ADR	38	-23.1	.18	40.15	54	-13.85	-	-	-	-	62	166	H
* 8.152	37.25	PK-U	35.7	-26.5	0	46.45	-	-	74	-27.55	-	-	66	250	V
* 8.152	26.84	ADR	35.7	-26.5	.18	36.22	54	-17.78	-	-	-	-	66	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

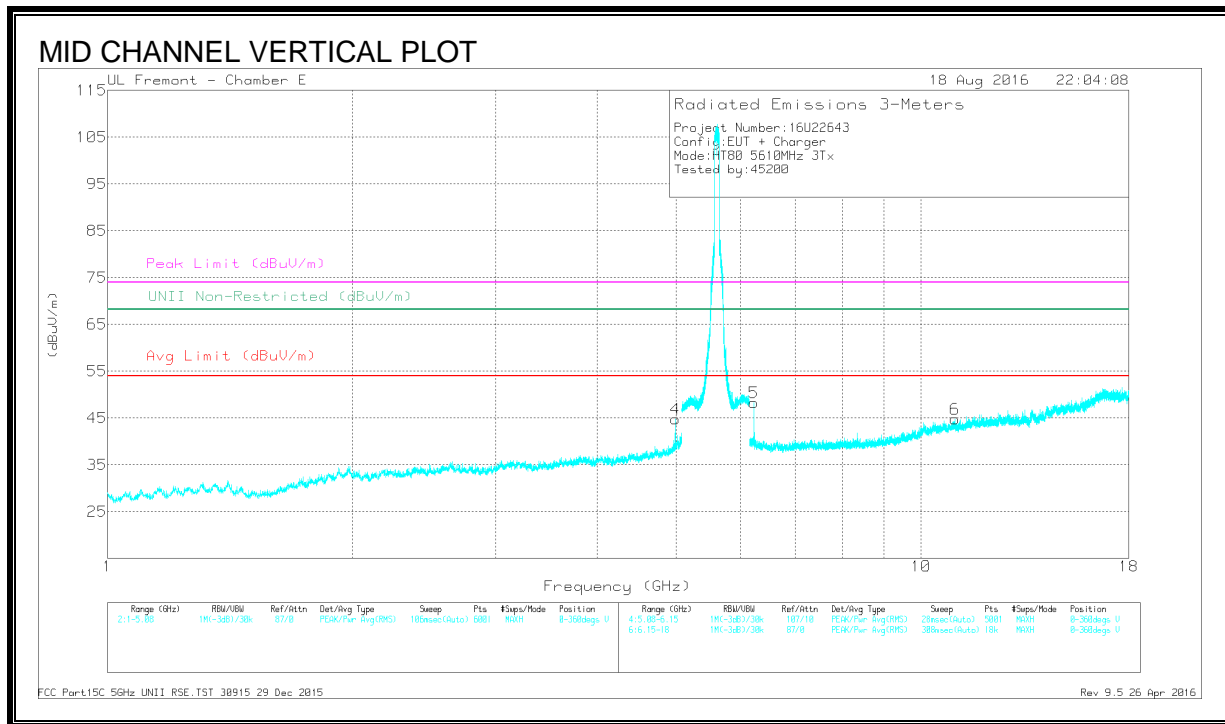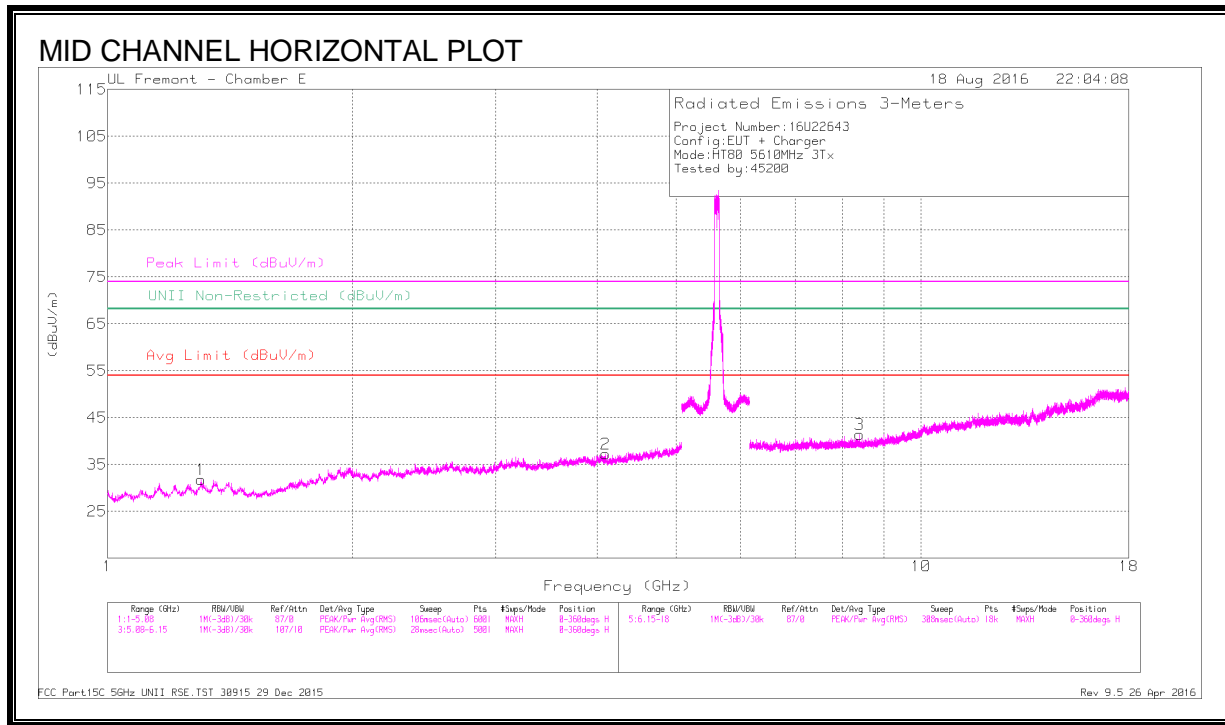

DATA



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.301	44.3	PK-U	29.3	-35.4	0	38.2	-	-	74	-35.8	-	-	314	312	H
* 1.302	33.24	ADR	29.3	-35.4	.18	27.32	54	-26.68	-	-	-	-	314	312	H
* 4.095	40.86	PK-U	33.4	-30.7	0	43.56	-	-	74	-30.44	-	-	194	354	H
* 4.098	29.89	ADR	33.4	-30.7	.18	32.77	54	-21.23	-	-	-	-	194	354	H
* 4.987	45.85	PK-U	33.9	-29.3	0	50.45	-	-	74	-23.55	-	-	150	202	V
* 4.987	39.31	ADR	33.9	-29.3	.18	44.09	54	-9.91	-	-	-	-	150	202	V
* 8.402	36.96	PK-U	35.7	-26.4	0	46.26	-	-	74	-27.74	-	-	314	195	H
* 8.405	26.6	ADR	35.7	-26.4	.18	36.08	54	-17.92	-	-	-	-	314	195	H
* 11.001	35.92	PK-U	38	-22.8	0	51.12	-	-	74	-22.88	-	-	65	246	V
* 11.003	24.88	ADR	38	-22.8	.18	40.26	54	-13.74	-	-	-	-	65	246	V
6.233	44.92	PK-U	35.6	-28.3	0	52.22	-	-	-	-	68.2	-15.98	154	219	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

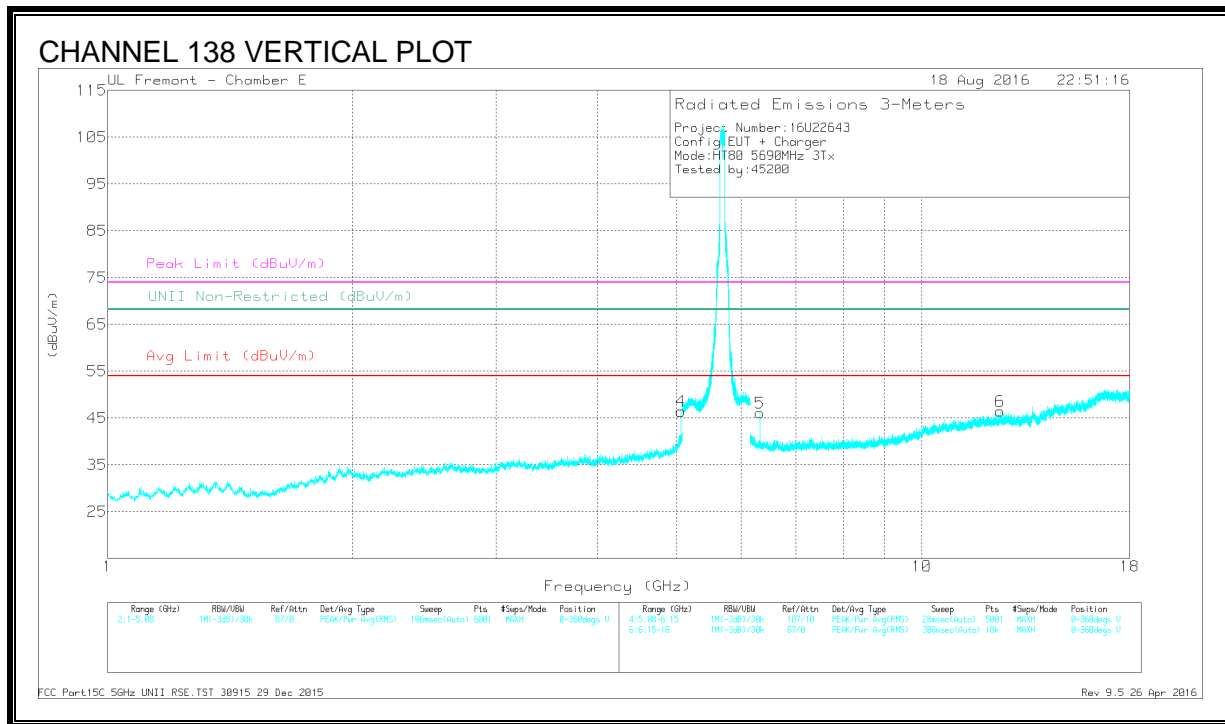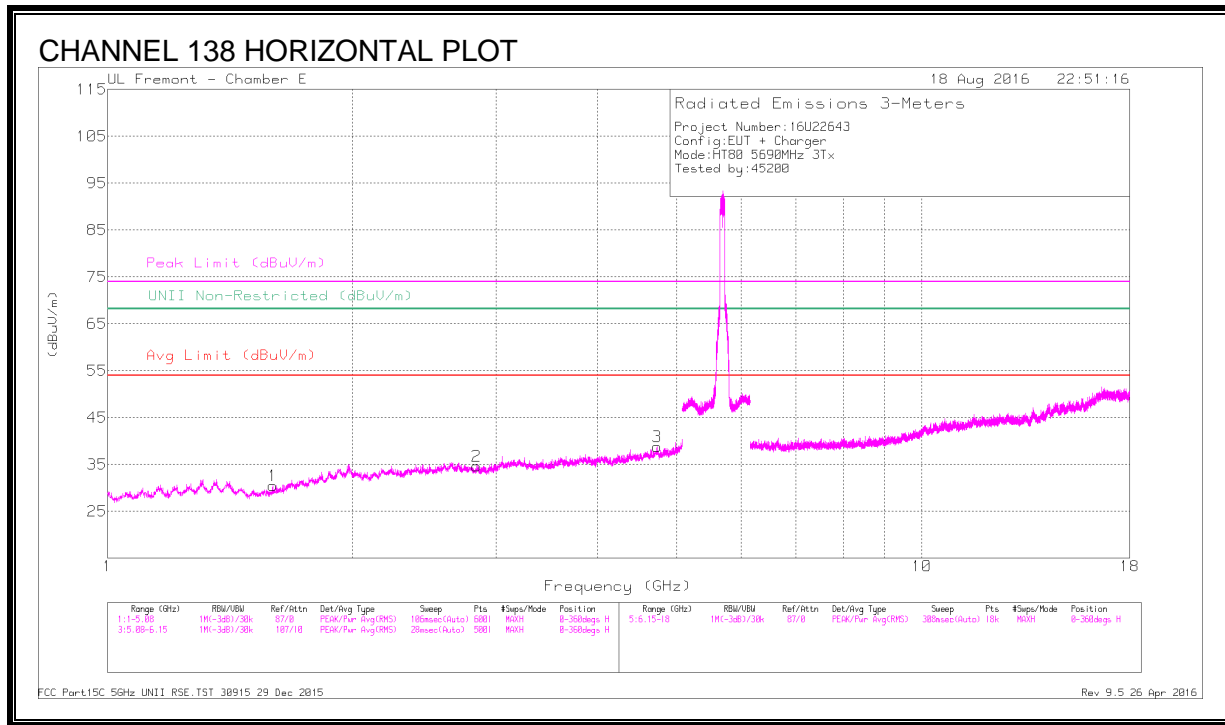

DATA

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb l/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarity
* 1.594	43.75	PK-U	27.8	-34.8	0	36.75	-	-	74	-37.25	-	-	356	371	H
* 1.595	32.31	ADR	27.8	-34.7	.18	25.59	54	-28.41	-	-	-	-	356	371	H
* 2.841	41.04	PK-U	32.2	-31.9	0	41.34	-	-	74	-32.66	-	-	74	132	H
* 2.838	29.99	ADR	32.2	-31.9	.18	30.47	54	-23.53	-	-	-	-	74	132	H
* 4.735	39.58	PK-U	34	-28.9	0	44.68	-	-	74	-29.32	-	-	63	346	H
* 4.733	29.17	ADR	34	-28.9	.18	34.45	54	-19.55	-	-	-	-	63	346	H
* 5.058	45.17	PK-U	34	-28	0	51.17	-	-	74	-22.83	-	-	151	211	V
* 5.058	38.53	ADR	34	-28	.18	44.71	54	-9.29	-	-	-	-	151	211	V
* 12.476	36.53	PK-U	39.1	-23.3	0	52.33	-	-	74	-21.67	-	-	179	157	V
* 12.474	25.75	ADR	39.1	-23.3	.18	41.73	54	-12.27	-	-	-	-	179	157	V
6.322	43.19	PK-U	35.6	-28.6	0	50.19	-	-	-	-	68.2	-18.01	154	212	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.123. 802.11ac VHT80 3Tx STBC MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

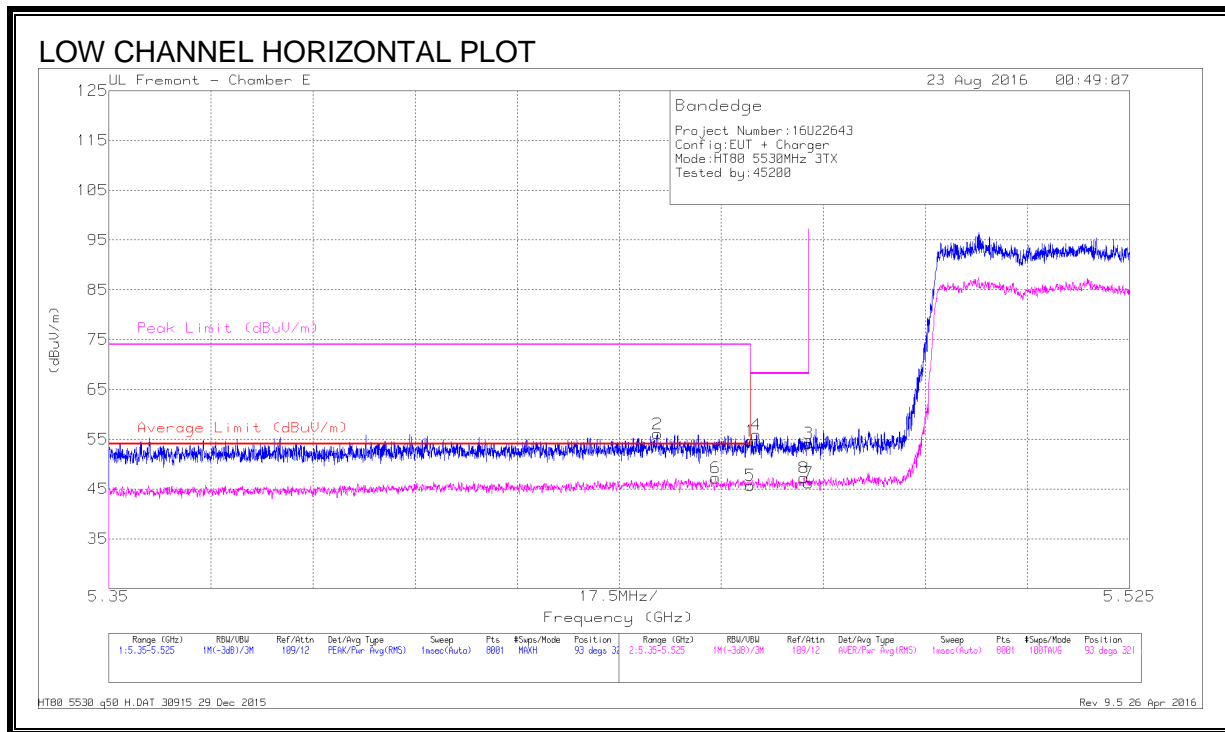


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.95	Pk	34.4	-19.7	0	54.65	-	-	74	-19.35	93	321	H
2	* 5.444	41.17	Pk	34.4	-19.5	0	56.07	-	-	74	-17.93	93	321	H
5	* 5.46	30.84	RMS	34.4	-19.7	.18	45.73	54	-8.27	-	-	93	321	H
6	* 5.454	32.33	RMS	34.4	-19.7	.18	47.22	54	-6.78	-	-	93	321	H
4	5.461	41.2	Pk	34.4	-19.7	0	55.9	-	-	68.2	-12.3	93	321	H
8	5.469	32.37	RMS	34.4	-19.7	.18	47.26	-	-	-	-	93	321	H
3	5.47	39.45	Pk	34.4	-19.7	0	54.15	-	-	68.2	-14.05	93	321	H
7	5.47	31.33	RMS	34.4	-19.7	.18	46.22	-	-	-	-	93	321	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

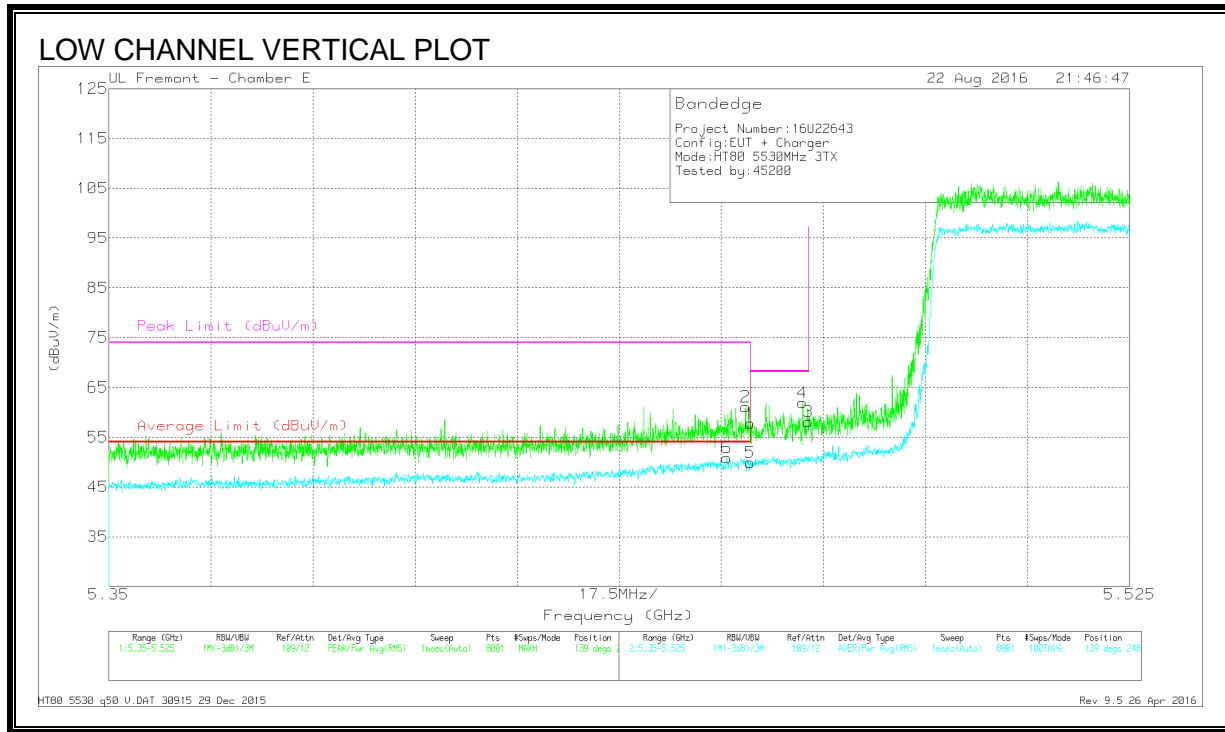

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.06	Pk	34.4	-19.7	0	57.76	-	-	74	-16.24	139	248	V
2	* 5.459	46.41	Pk	34.4	-19.7	0	61.11	-	-	74	-12.89	139	248	V
5	* 5.46	35.03	RMS	34.4	-19.7	.18	49.92	54	-4.08	-	-	139	248	V
6	* 5.456	35.99	RMS	34.4	-19.7	.18	50.88	54	-3.12	-	-	139	248	V
4	5.469	47.22	Pk	34.4	-19.7	0	61.92	-	-	68.2	-6.28	139	248	V
3	5.47	43.44	Pk	34.4	-19.7	0	58.14	-	-	68.2	-10.06	139	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

Note: Covered by 3TX CDD Mode

8.124. 802.11ac VHT80 3Tx BEAM FORMING MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

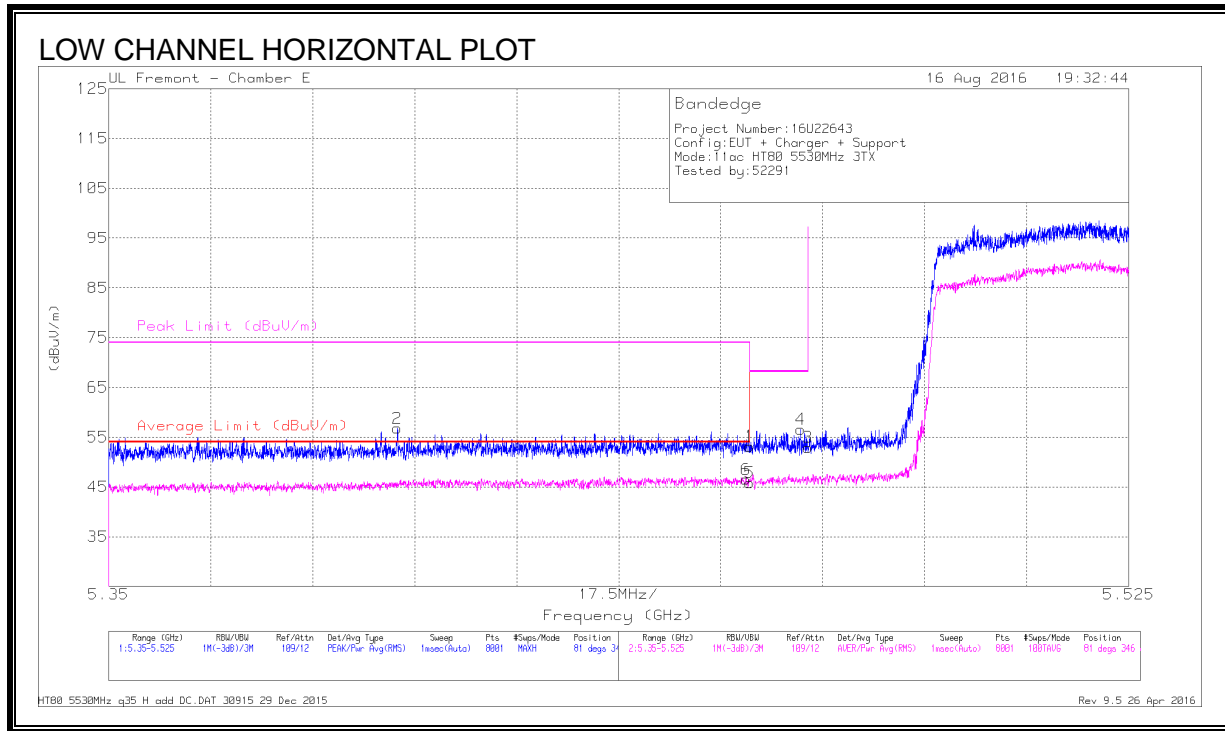


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.4	41.79	Pk	34.4	-19.4	0	56.79	-	-	74	-17.21	81	346	H
6	* 5.459	31.83	RMS	34.4	-19.7	.62	47.25	54	-6.75	-	-	81	346	H
1	* 5.46	38.46	Pk	34.4	-19.7	0	53.16	-	-	74	-20.84	81	346	H
5	* 5.46	31.17	RMS	34.4	-19.7	.62	46.59	54	-7.41	-	-	81	346	H
4	5.469	41.89	Pk	34.4	-19.7	0	56.59	-	-	68.2	-11.61	81	346	H
3	5.47	38.25	Pk	34.4	-19.7	0	52.95	-	-	68.2	-15.25	81	346	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

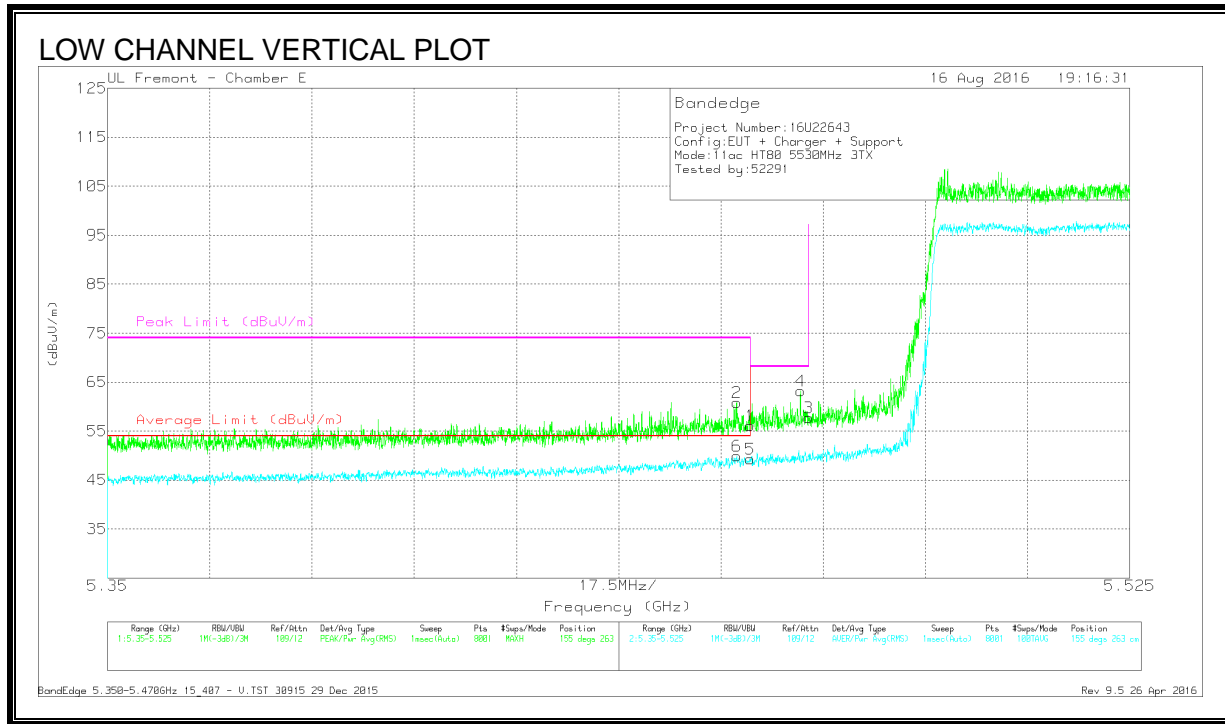

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.44	Pk	34.4	-19.7	0	56.14	-	-	74	-17.86	155	263	V
2	* 5.458	46.18	Pk	34.4	-19.7	0	60.88	-	-	74	-13.12	155	263	V
5	* 5.46	33.96	RMS	34.4	-19.7	.62	49.38	54	-4.62	-	-	155	263	V
6	* 5.458	34.65	RMS	34.4	-19.7	.62	49.97	54	-4.03	-	-	155	263	V
4	5.469	48.51	Pk	34.4	-19.7	0	63.21	-	-	68.2	-4.99	155	263	V
3	5.47	42.99	Pk	34.4	-19.7	0	57.69	-	-	68.2	-10.51	155	263	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

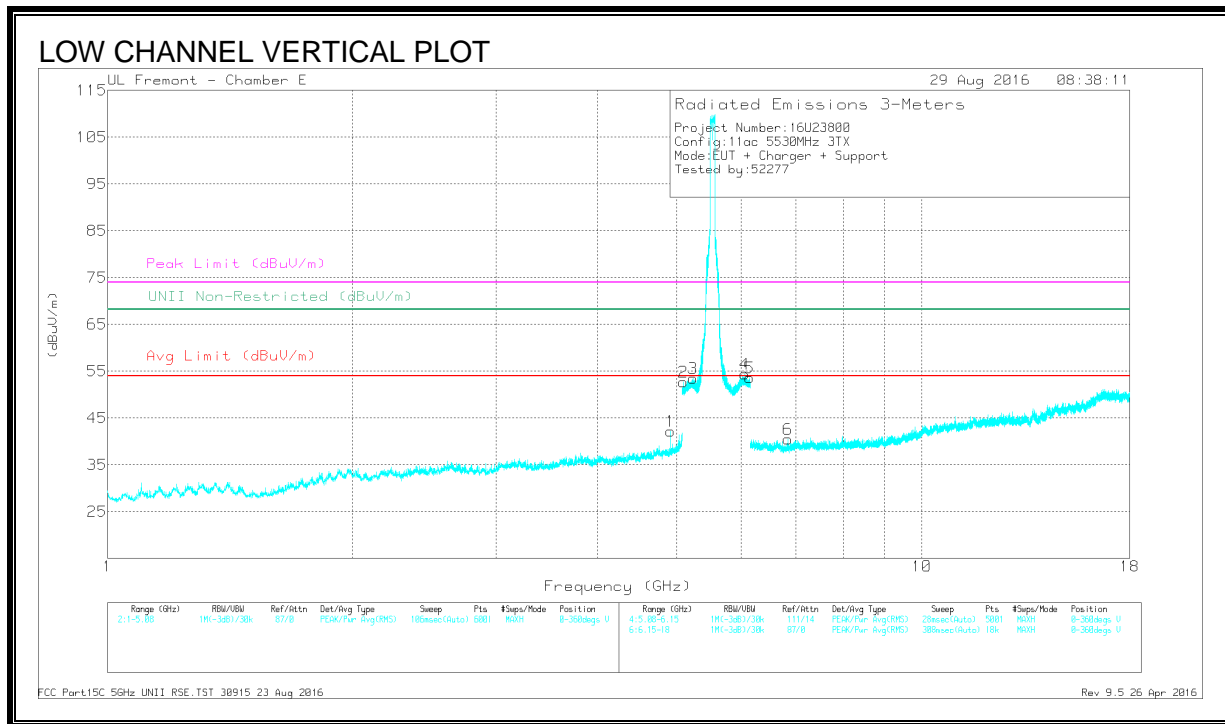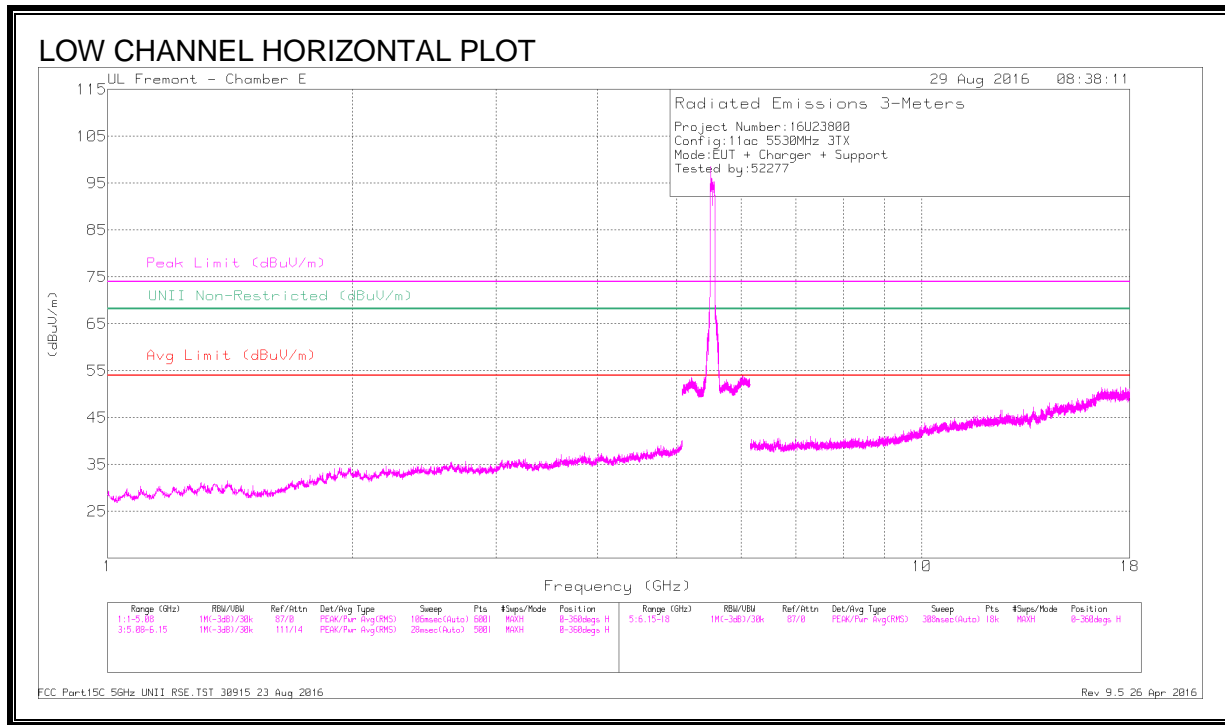

DATA



Markets	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.916	44.05	PK-U	34	-29.5	0	48.55	-	-	74	-25.45	-	-	115	214	V
	* 4.915	34.16	ADR	34	-29.5	.62	39.28	54	-14.72	-	-	-	-	115	214	V
2	* 5.09	43.35	PK-U	34	-18.6	0	58.75	-	-	74	-15.25	-	-	126	301	V
	* 5.091	32.32	ADR	34	-18.6	.62	48.34	54	-5.66	-	-	-	-	126	301	V
3	5.235	33.96	ADR	34.3	-19.3	0	48.96	-	-	-	-	-	-	145	250	V
4	6.056	44.7	PK-U	35.2	-19.2	0	60.7	-	-	-	-	68.2	-7.5	88	186	V
5	6.144	43.28	PK-U	35.5	-18.9	0	59.88	-	-	-	-	68.2	-8.32	202	109	V
6	6.843	38.85	PK-U	35.6	-28.5	0	45.95	-	-	-	-	68.2	-22.25	221	249	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

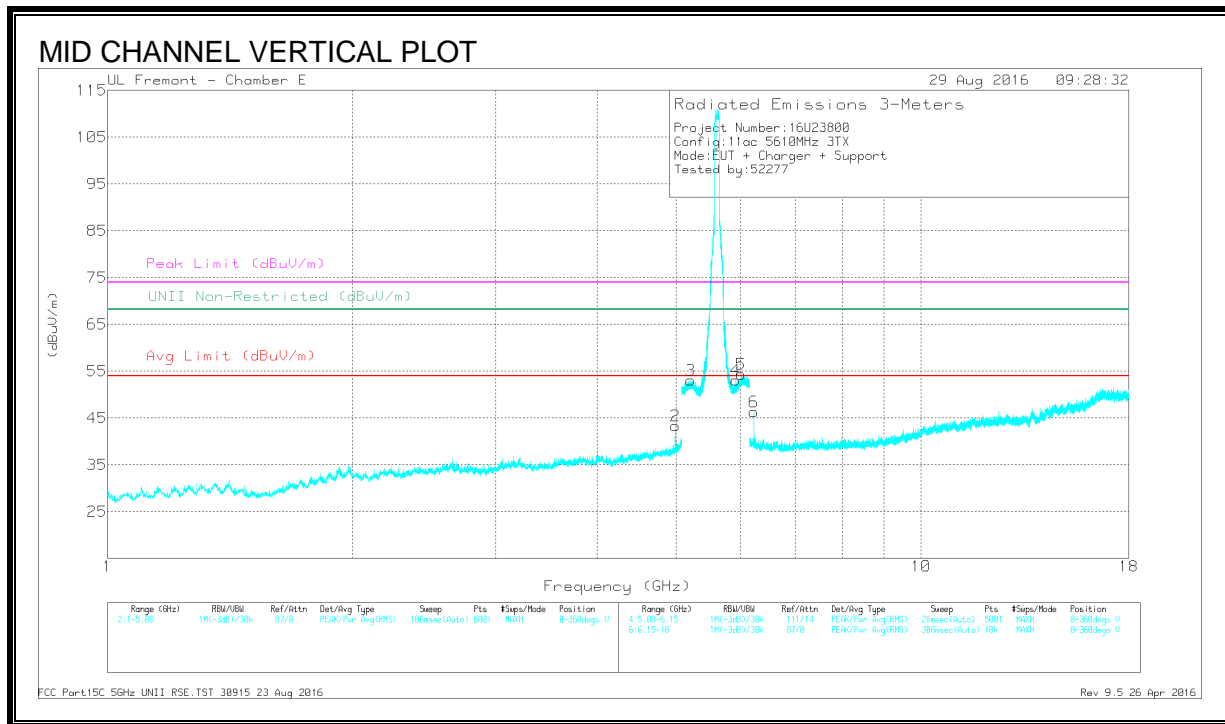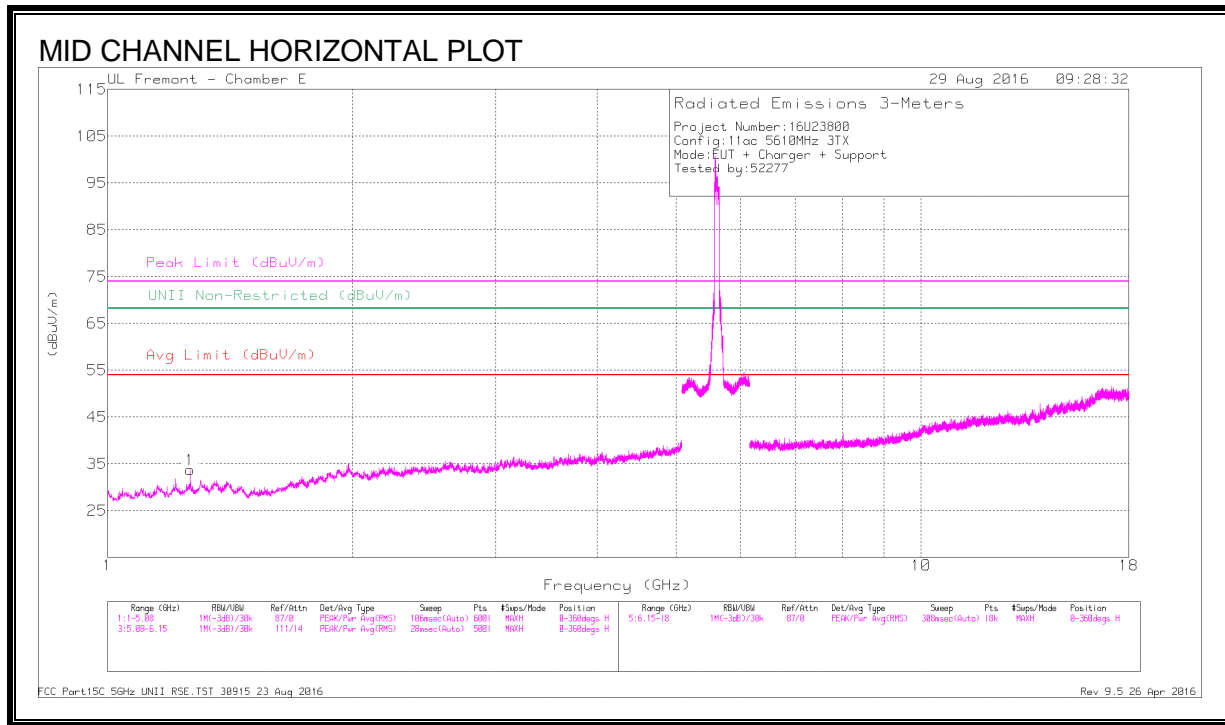

DATA



Marke rs	Freque ncy (GHz)	Meter Readi ng (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Correc ted Readi ng (dBuV /m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restricted (dBuV/m)	PK Margi n (dB)	Azim uth (Degs)	Heig ht (cm)	Polar ity
1	* 1.265	44.55	PK-U	29.1	-35.7	0	37.95	-	-	74	-36.05	-	-	130	277	H
	* 1.262	33.25	ADR	29	-35.7	.62	27.13	54	-26.87	-	-	-	-	130	277	H
2	* 4.987	44.91	PK-U	33.9	-29.3	0	49.51	-	-	74	-24.49	-	-	168	244	V
	* 4.987	36.3	ADR	33.9	-29.3	.62	41.52	54	-12.48	-	-	-	-	168	244	V
3	5.211	44.48	PK-U	34.3	-19	0	59.78	-	-	-	-	68.2	-8.42	157	238	V
4	5.916	42.92	PK-U	35	-19.6	0	58.32	-	-	-	-	68.2	-9.88	285	111	V
5	6.008	44.32	PK-U	35.1	-19.4	0	60.02	-	-	-	-	68.2	-8.18	114	335	V
6	6.233	44.9	PK-U	35.6	-28.3	0	52.2	-	-	-	-	68.2	-16	169	233	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

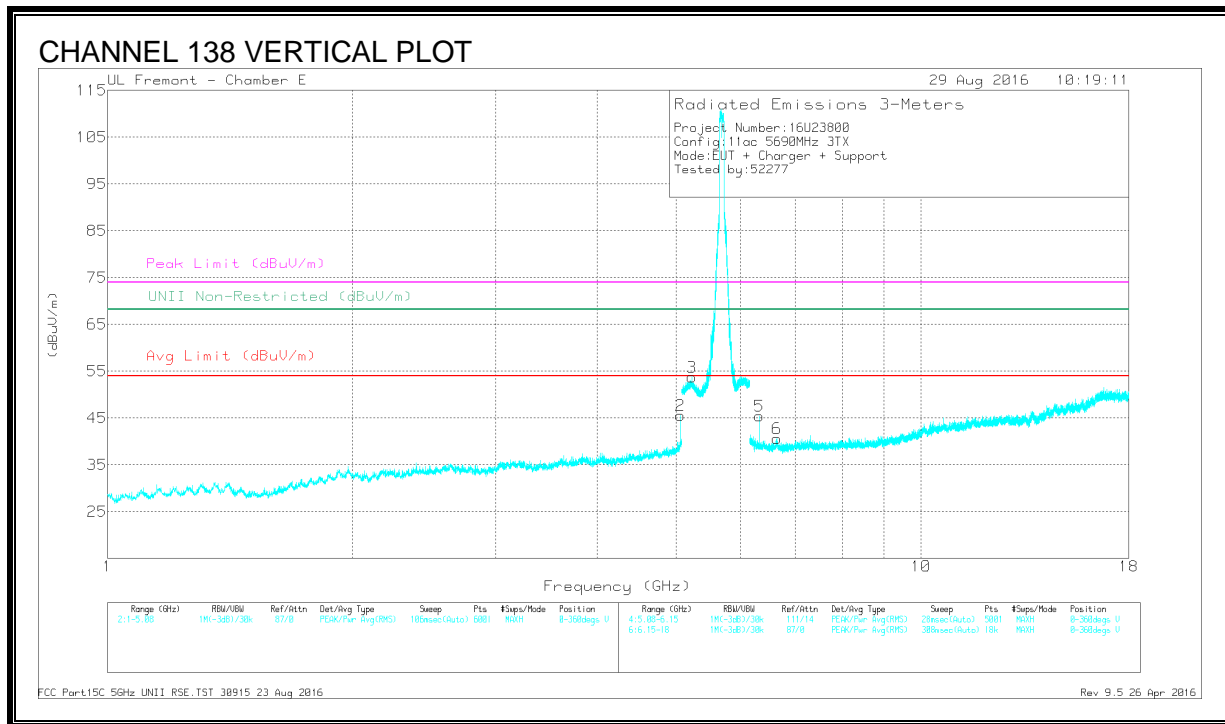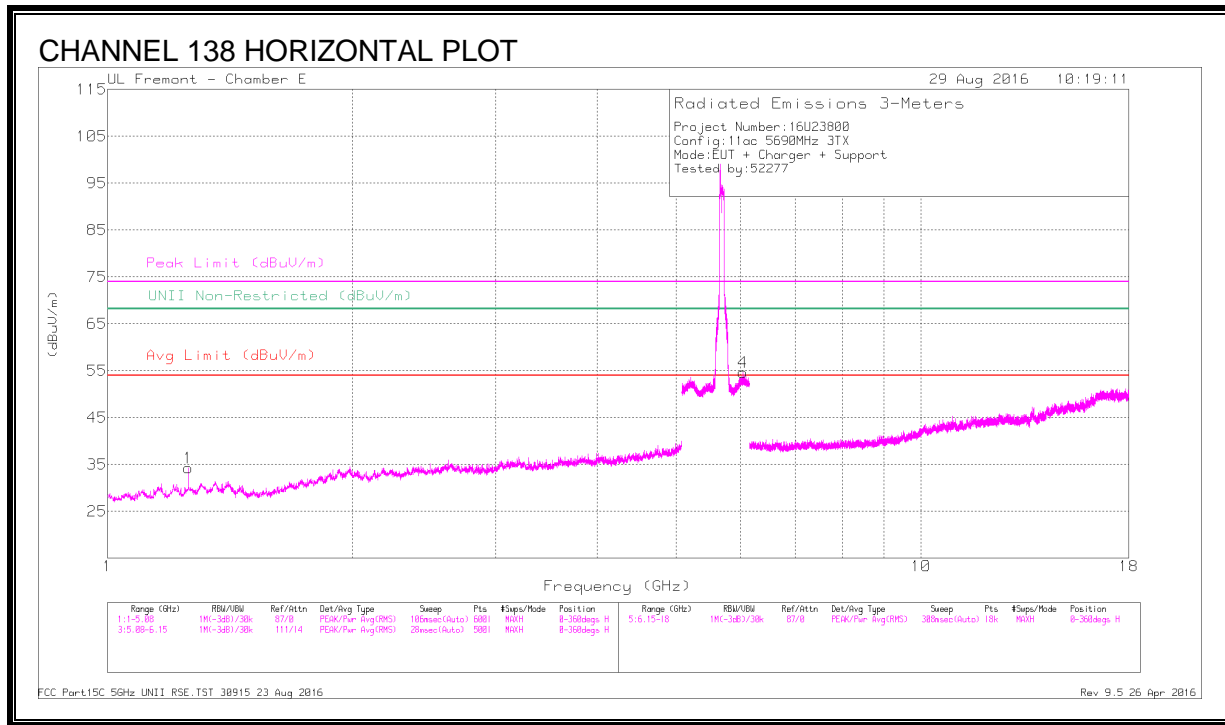

DATA

Markets	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.257	44.42	PK-U	29	-35.7	0	37.72	-	-	74	-36.28	-	-	50	281	H
	* 1.259	33.2	ADR	29	-35.7	.62	27.12	54	-26.88	-	-	-	-	50	281	H
2	* 5.058	45.15	PK-U	34	-28	0	51.15	-	-	74	-22.85	-	-	156	270	V
	* 5.058	36.31	ADR	34	-28	.62	42.93	54	-11.07	-	-	-	-	156	270	V
3	5.225	44.15	PK-U	34.3	-19.2	0	59.25	-	-	-	-	68.2	-8.95	0	361	V
4	6.036	33.85	ADR	35.2	-19.4	0	49.65	-	-	-	-	-	-	291	125	H
5	6.322	44.71	PK-U	35.6	-28.6		51.71	-	-	-	-	68.2	-16.49	151	188	V
6	6.65	27.14	ADR	35.6	-26.7		36.04	-	-	-	-	-	-	46	144	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

8.125. 802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND


RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL) (FCC)

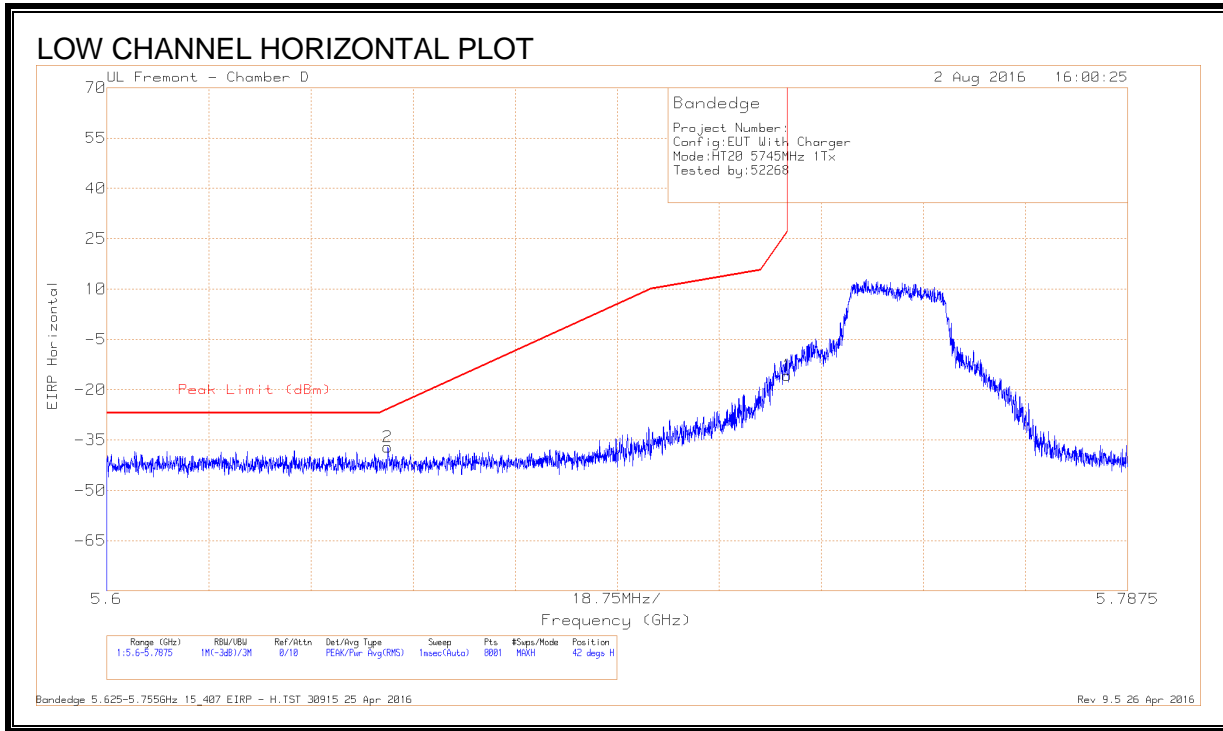

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Fltr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.652	-66.17	Pk	34.6	-17.3	11.8	-37.07	-25.79	-11.28	42	375	H
1	5.725	-45.05	Pk	34.8	-17.3	11.8	-15.75	26.99	-42.74	42	375	H

Pk - Peak detector

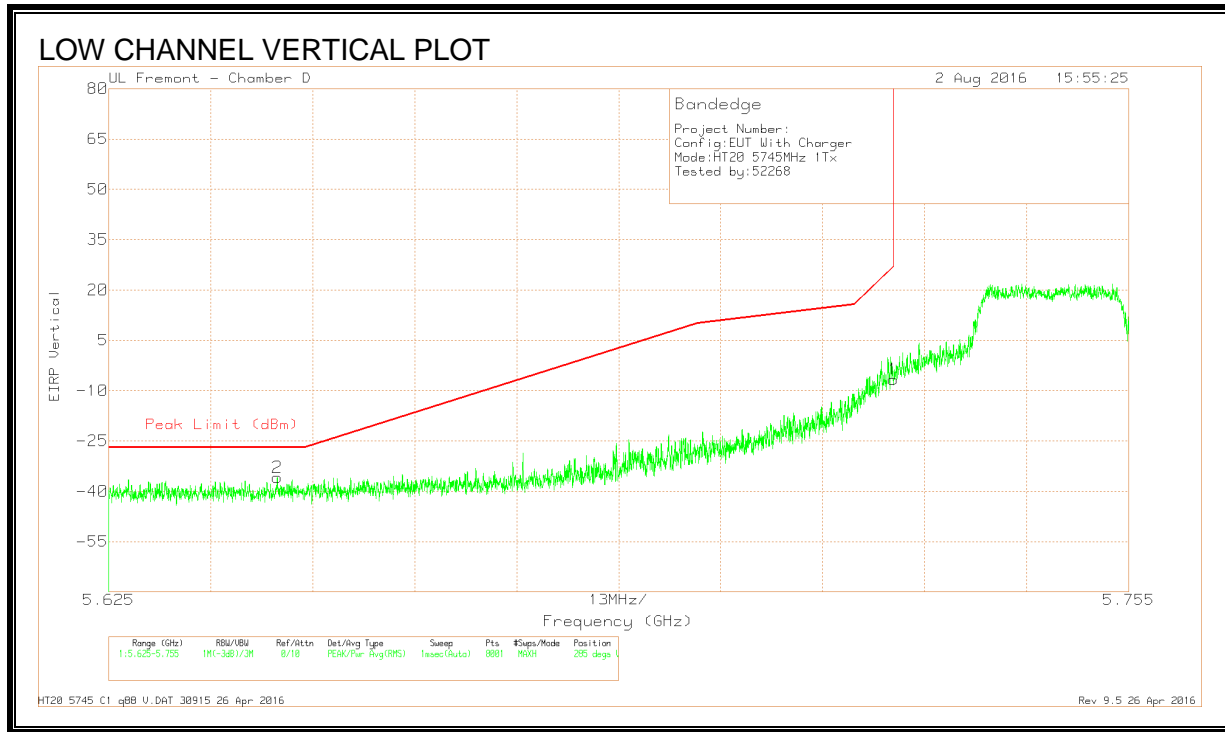


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.646	-64.84	Pk	34.6	-17.4	11.8	-35.84	-27	-8.84	285	228	V
1	5.725	-35.91	Pk	34.8	-17.3	11.8	-6.61	26.97	-33.58	285	228	V

Pk - Peak detector


RESTRICTED BANDEDGE, CHAIN 0 (HIGH CHANNEL) (FCC)

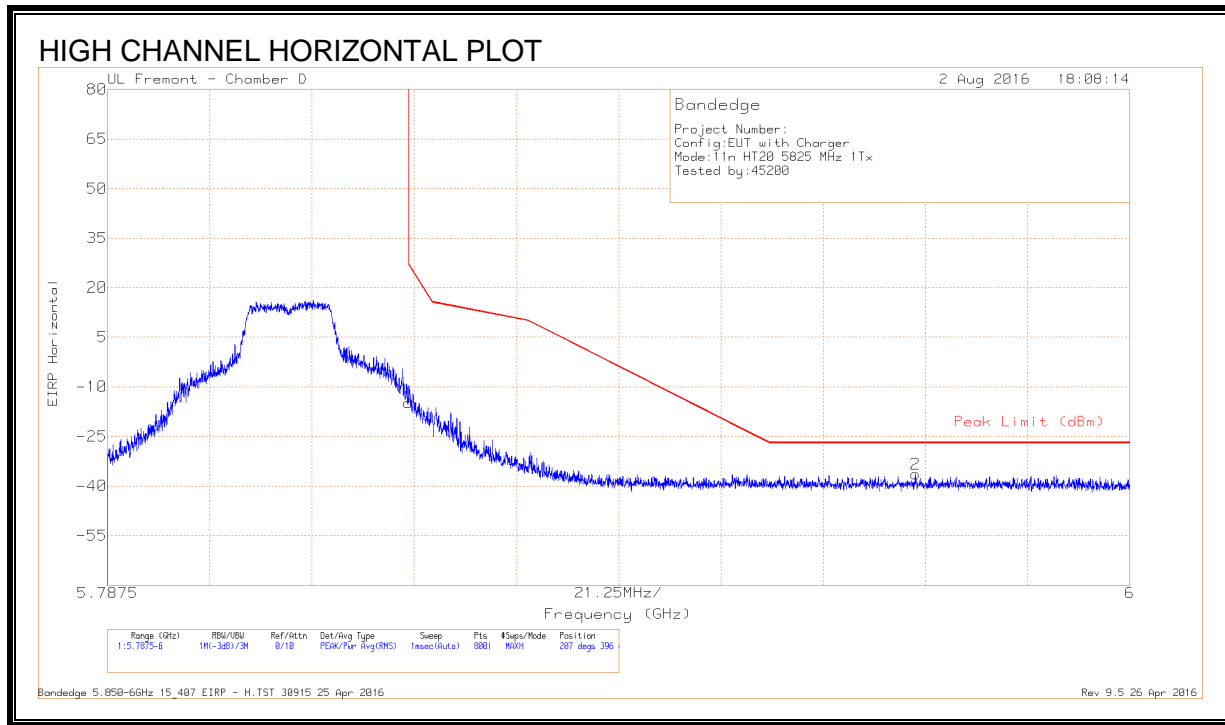

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.24	Pk	34.9	-17.3	11.8	-14.84	26.99	-41.83	207	396	H
2	5.955	-65.92	Pk	35	-17.2	11.8	-36.32	-27	-9.32	207	396	H

Pk - Peak detector

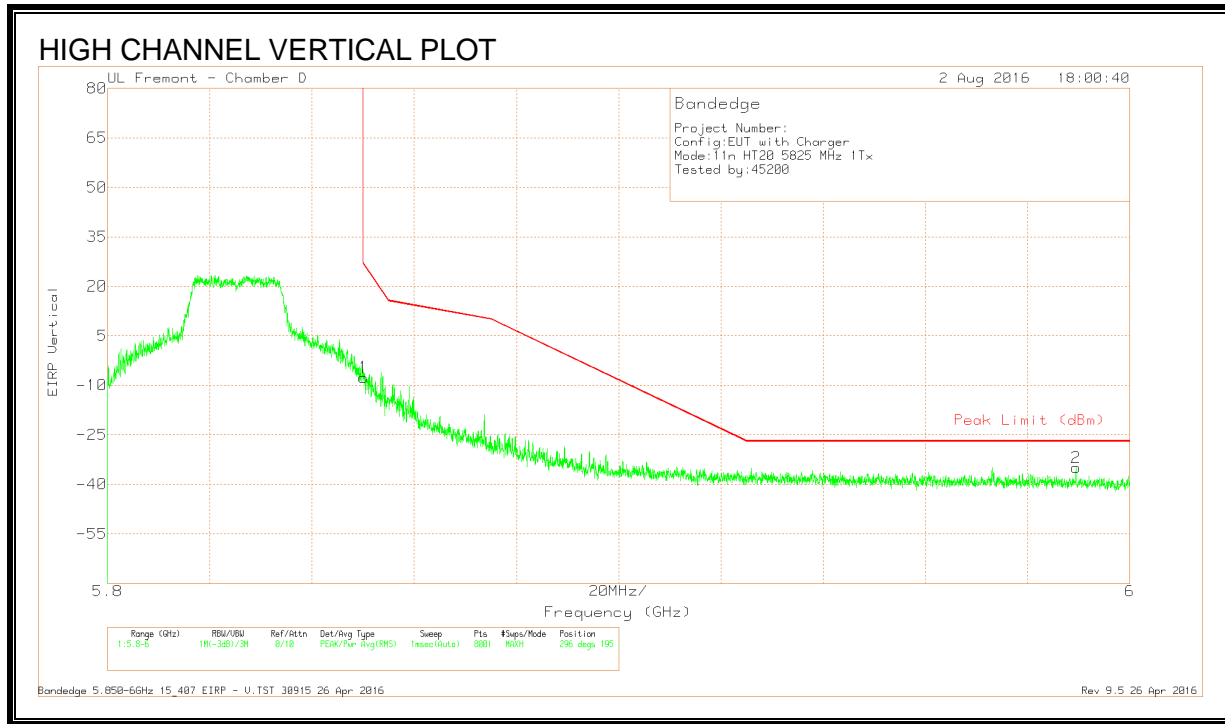


DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-36.95	Pk	34.9	-17.3	11.8	-7.55	26.94	-34.49	296	195	V
2	5.99	-64.54	Pk	35.1	-17.2	11.8	-34.84	-27	-7.84	296	195	V

Pk - Peak detector


RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL) (IC)

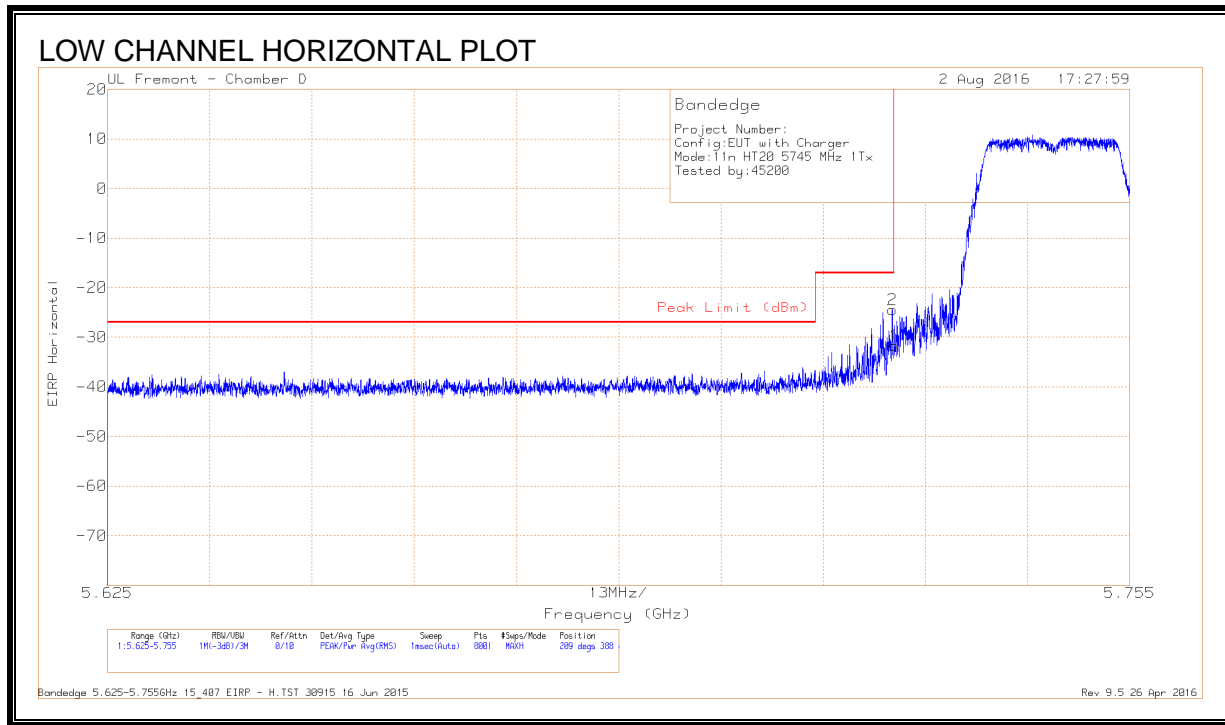

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb1/Fitr/Paid (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-61.01	Pk	34.8	-17.3	11.8	-31.71	-17	-14.71	209	388	H
2	5.725	-53.68	Pk	34.8	-17.3	11.8	-24.38	-17	-7.38	209	388	H

Pk - Peak detector

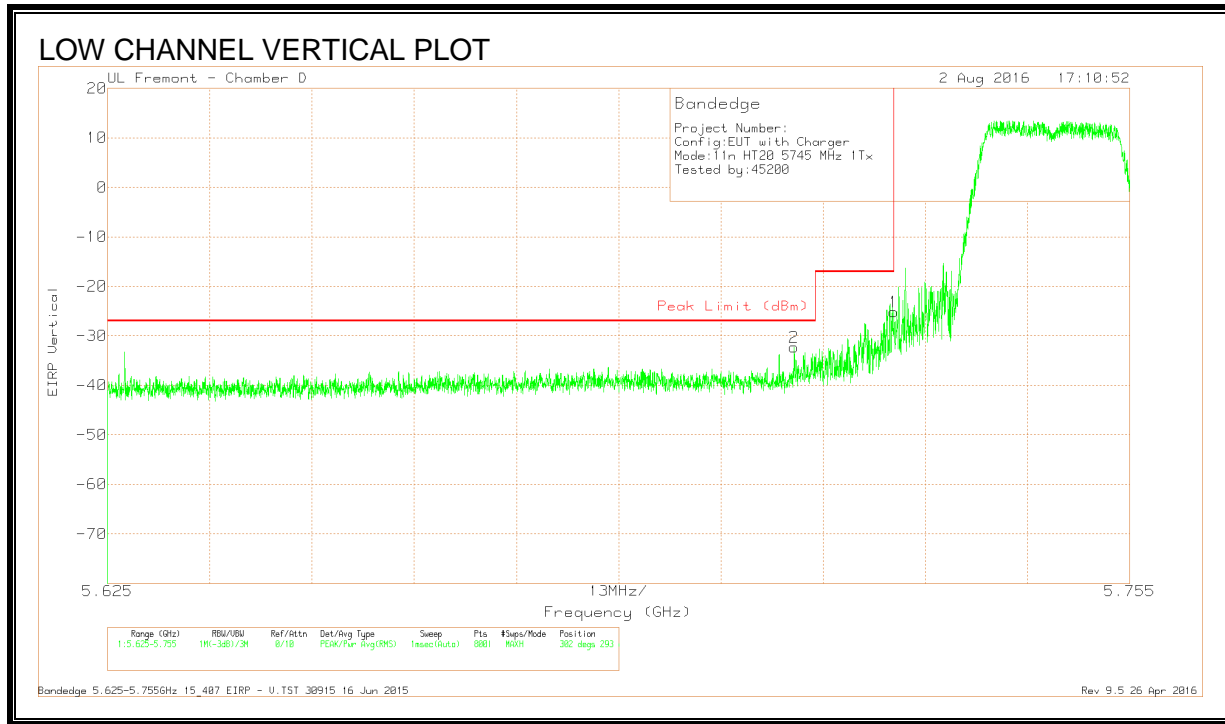


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.712	-61.64	Pk	34.8	-17.2	11.8	-32.24	-27	-5.24	302	293	V
1	5.725	-54.41	Pk	34.8	-17.3	11.8	-25.11	-17	-8.11	302	293	V

Pk - Peak detector


RESTRICTED BANDEDGE, CHAIN 0 (HIGH CHANNEL) (IC)

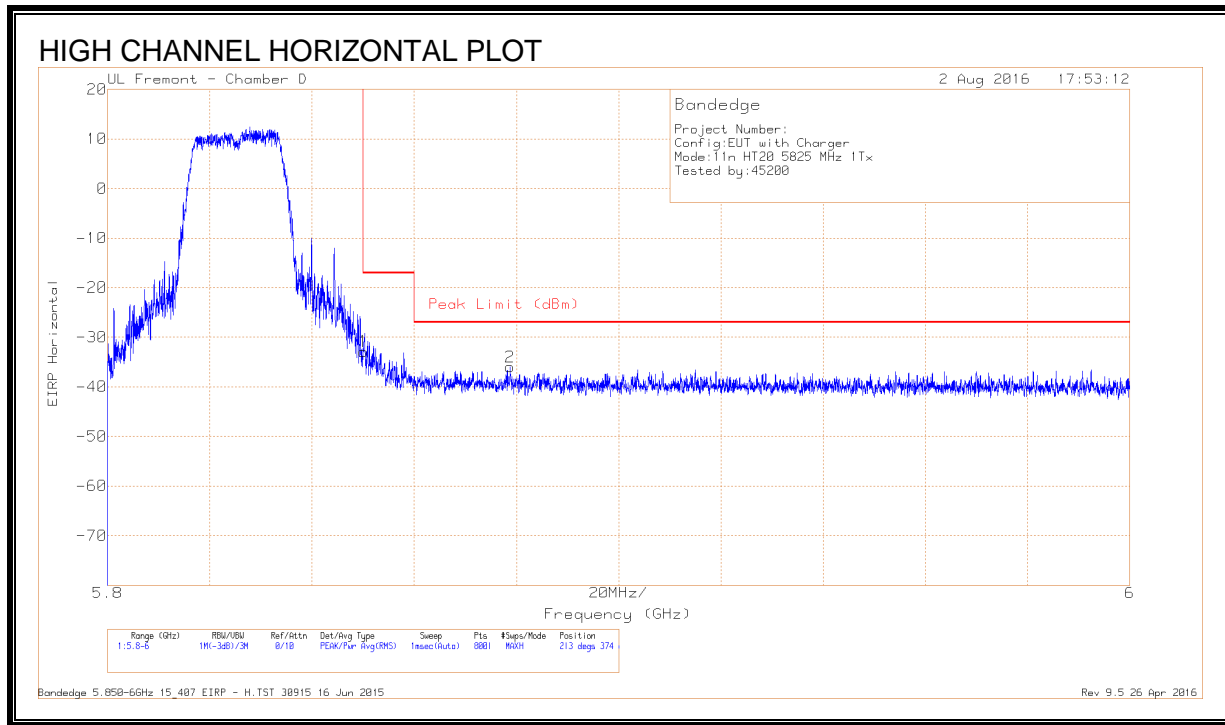

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.24	Pk	34.9	-17.3	11.8	-32.84	-17	-15.84	213	374	H
2	5.879	-65.46	Pk	34.9	-17.2	11.8	-35.96	-27	-8.96	213	374	H

Pk - Peak detector

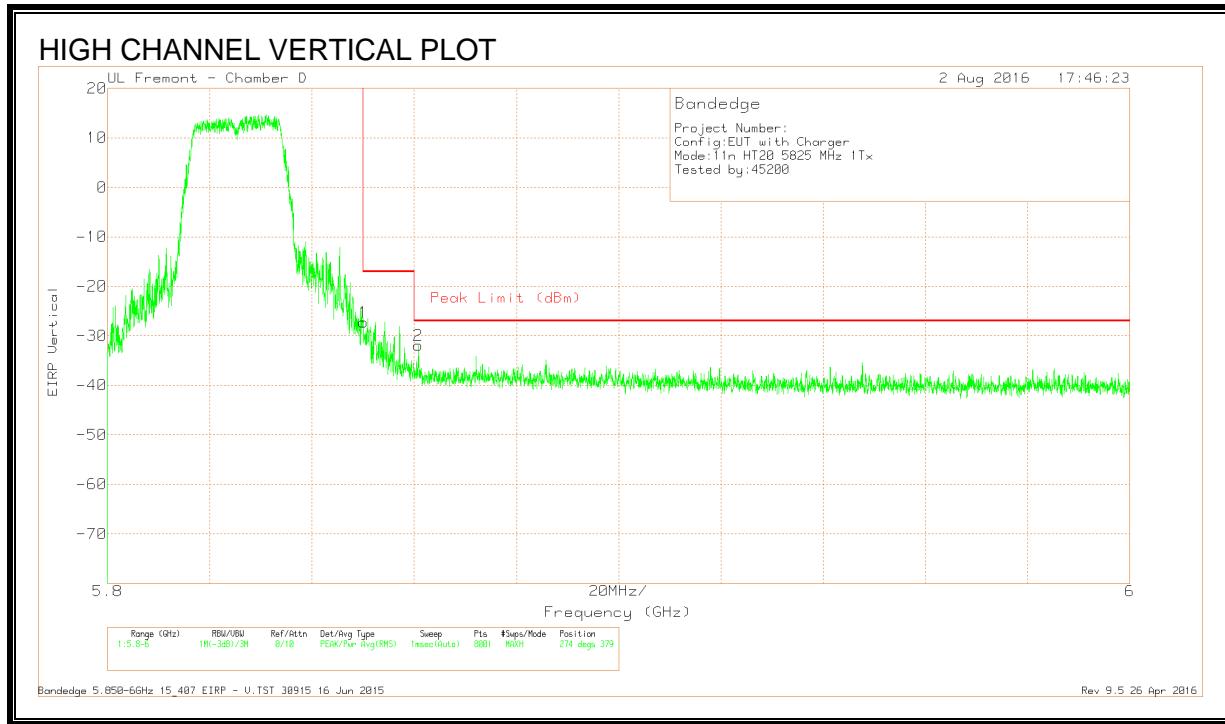


DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.69	Pk	34.9	-17.3	11.8	-27.29	-17	-10.29	274	379	V
2	5.861	-61.34	Pk	34.9	-17.3	11.8	-31.94	-27	-4.94	274	379	V

Pk - Peak detector


RESTRICTED BANDEDGE, CHAIN 1 (LOW CHANNEL) (FCC)

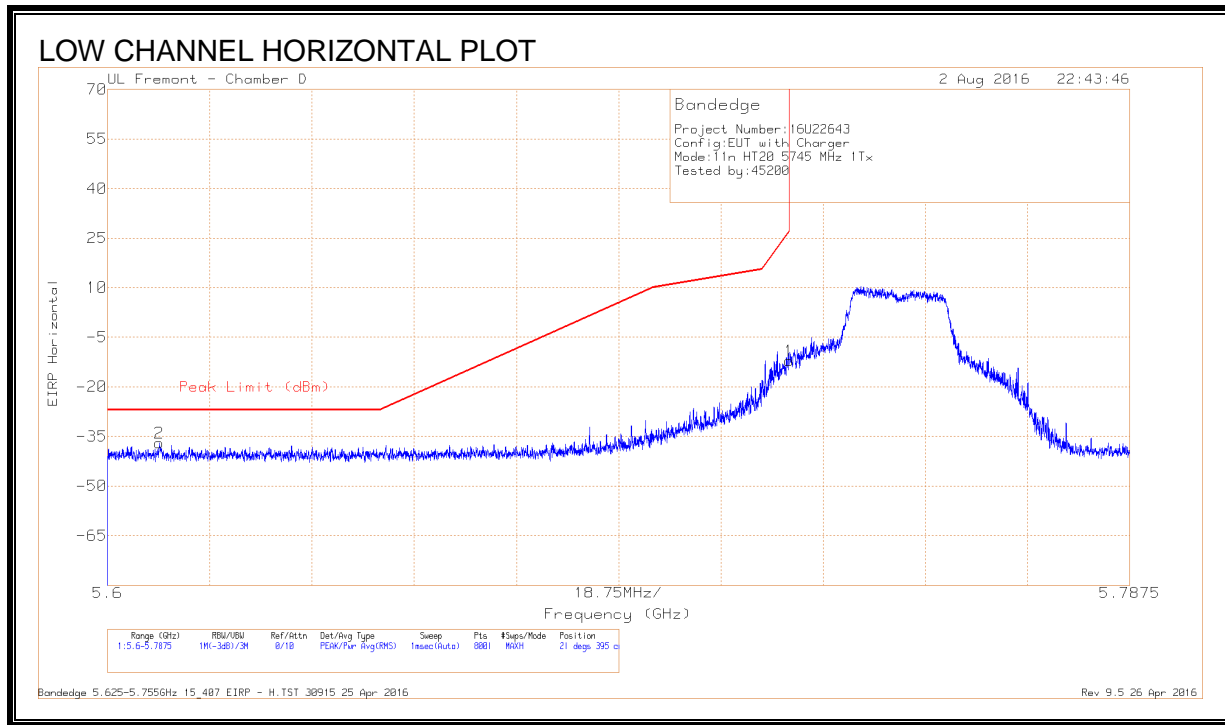

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.609	-65.72	Pk	34.5	-17.5	11.8	-36.92	-27	-9.92	21	395	H
1	5.725	-41.4	Pk	34.8	-17.3	11.8	-12.1	26.99	-39.09	21	395	H

Pk - Peak detector

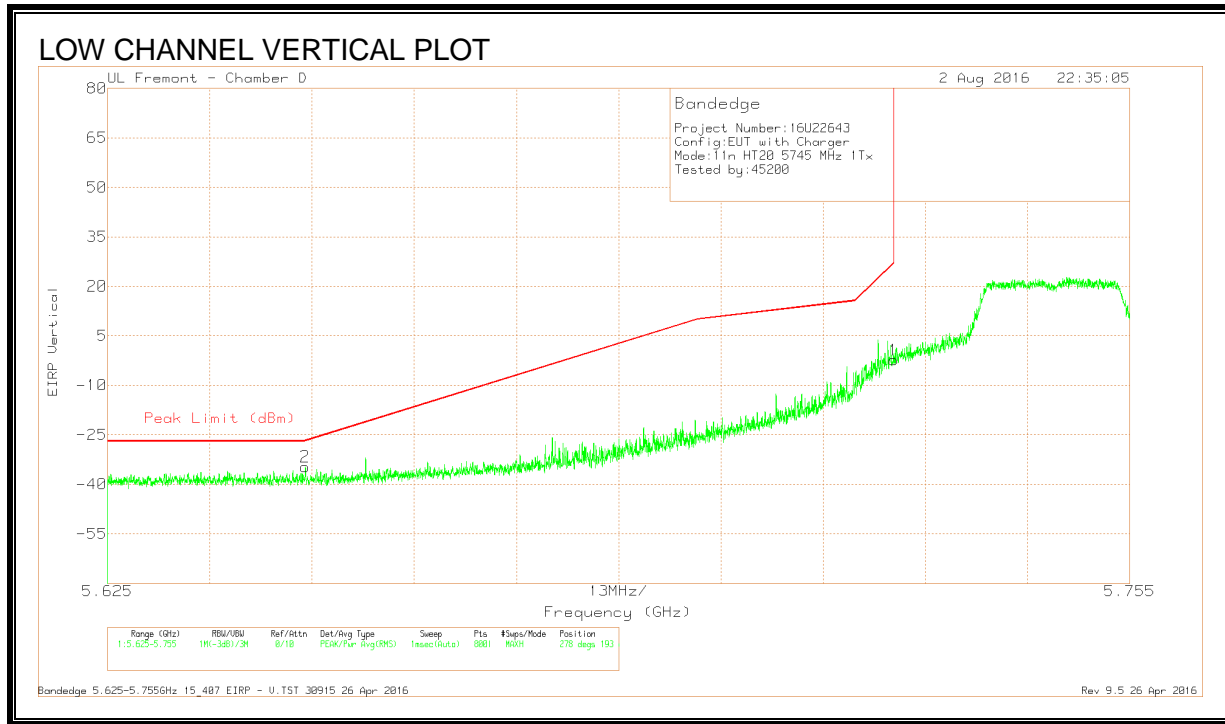


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65	-63.73	Pk	34.6	-17.3	11.8	-34.63	-26.89	-7.74	278	193	V
1	5.725	-31.64	Pk	34.8	-17.3	11.8	-2.34	26.97	-29.31	278	193	V

Pk - Peak detector


RESTRICTED BANDEDGE, CHAIN 1 (HIGH CHANNEL) (FCC)

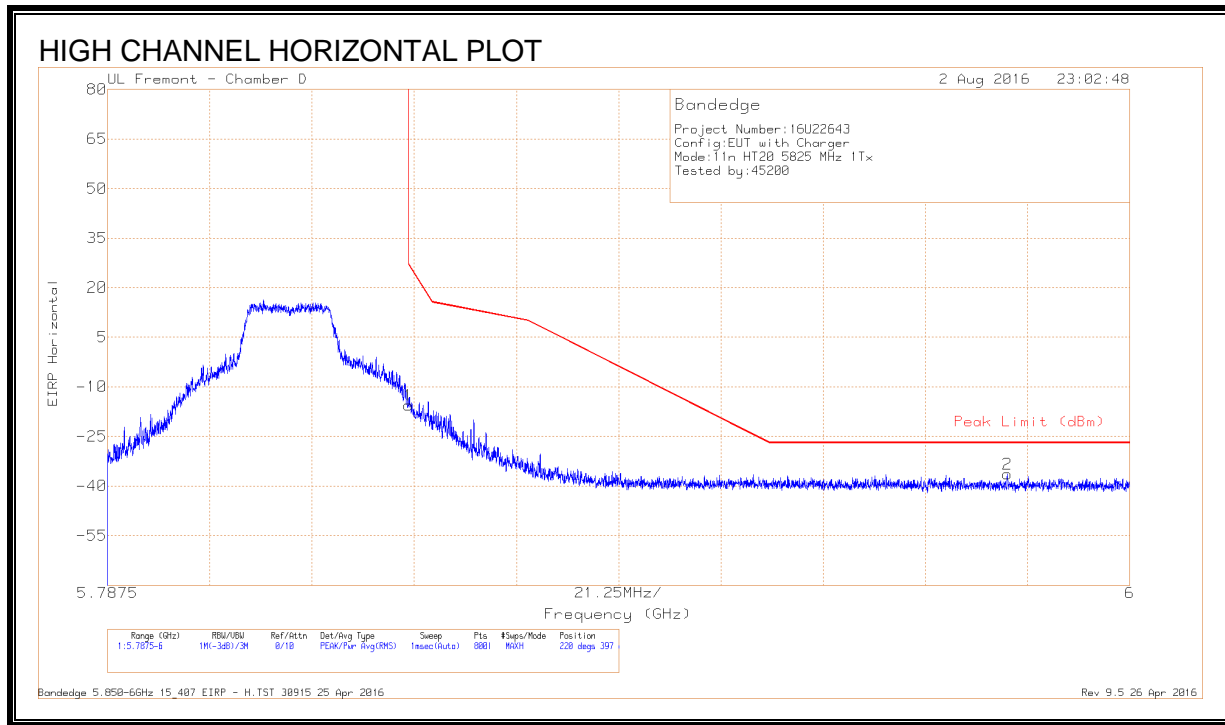

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.92	Pk	34.9	-17.3	11.8	-15.52	26.99	-42.51	220	397	H
2	5.975	-66	Pk	35.1	-17.2	11.8	-36.3	-27	-9.3	220	397	H

Pk - Peak detector

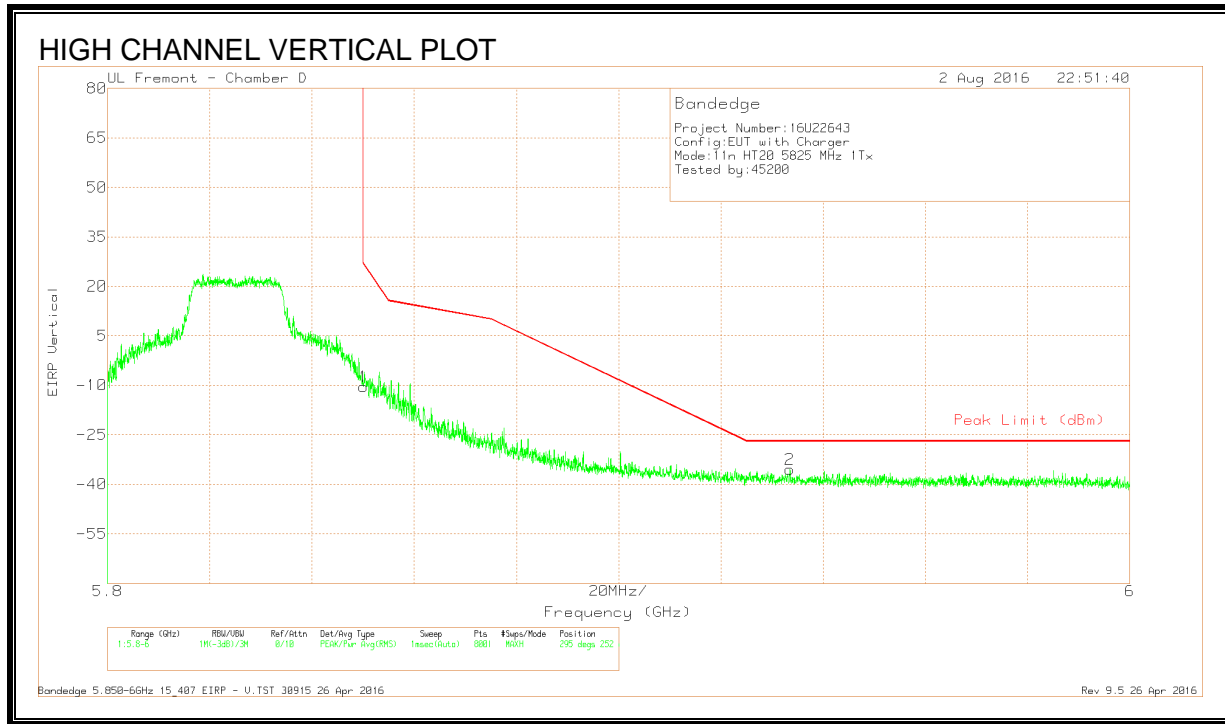


DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-39.79	Pk	34.9	-17.3	11.8	-10.39	26.94	-37.33	295	252	V
2	5.934	-65.15	Pk	35	-17.1	11.8	-35.45	-27	-8.45	295	252	V

Pk - Peak detector


RESTRICTED BANDEDGE , CHAIN 1 (LOW CHANNEL) (IC)

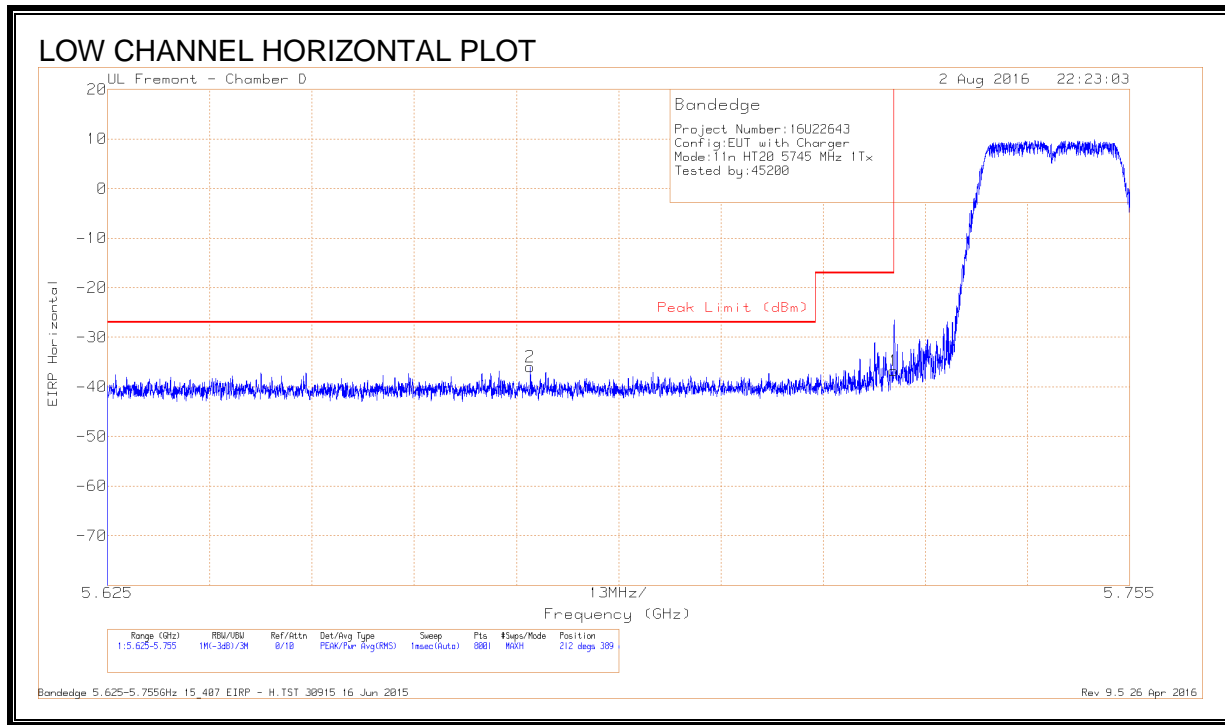

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/CbI/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.679	-65.31	Pk	34.7	-17.1	11.8	-35.91	-27	-8.91	212	389	H
1	5.725	-66	Pk	34.8	-17.3	11.8	-36.7	-17	-19.7	212	389	H

Pk - Peak detector

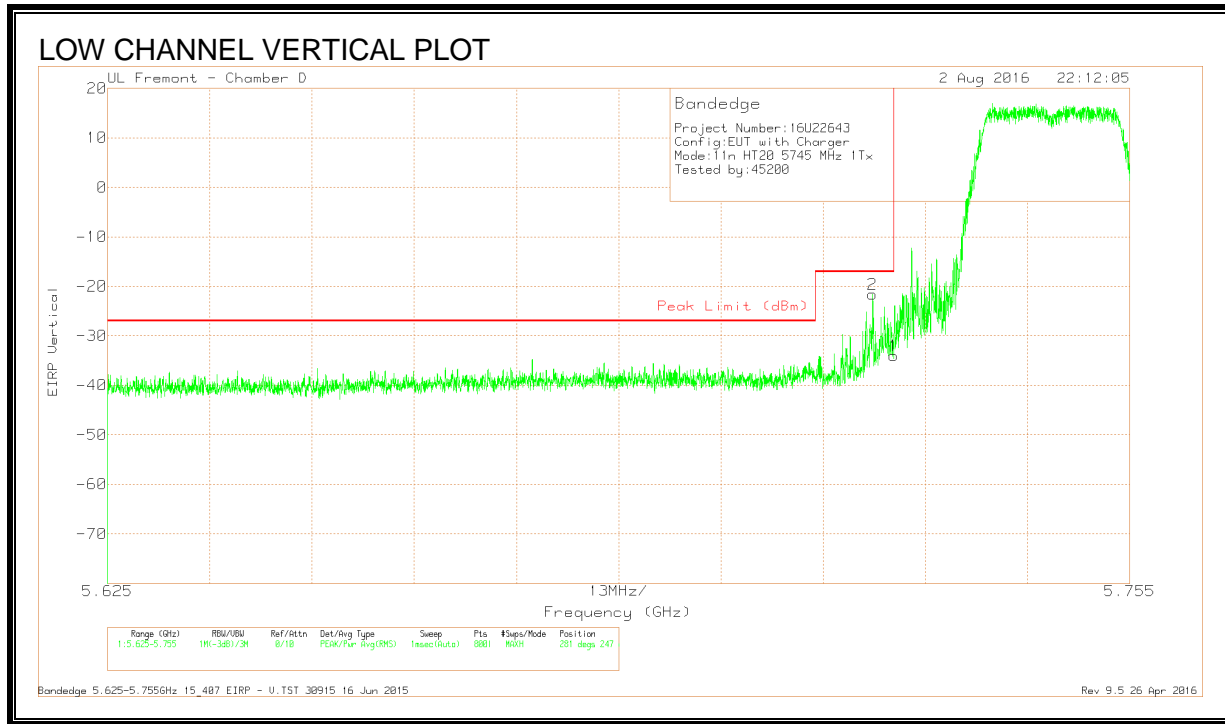


DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.722	-50.87	Pk	34.8	-17.3	11.8	-21.57	-17	-4.57	281	247	V
1	5.725	-63.33	Pk	34.8	-17.3	11.8	-34.03	-17	-17.03	281	247	V

Pk - Peak detector


RESTRICTED BANDEGE , CHAIN 1 (HIGH CHANNEL) (IC)

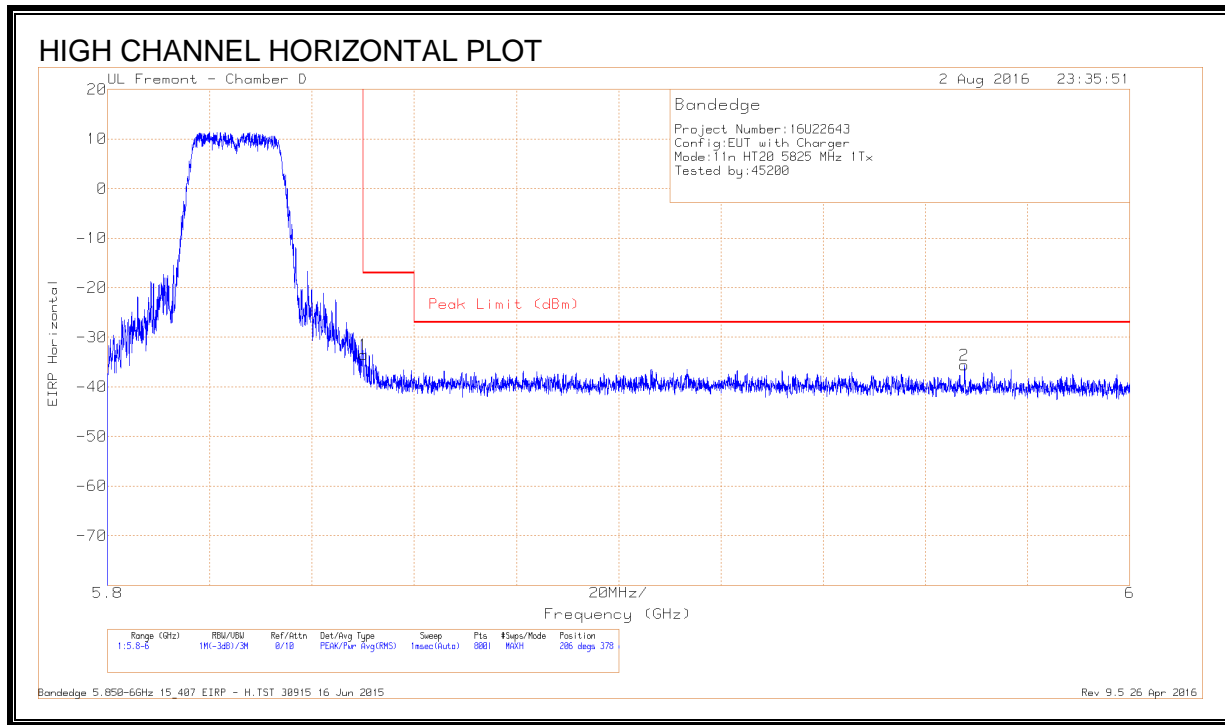

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb1/Fitr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.88	Pk	34.9	-17.3	11.8	-33.48	-17	-16.48	206	378	H
2	5.968	-65.24	Pk	35	-17.2	11.8	-35.64	-27	-8.64	206	378	H

Pk - Peak detector

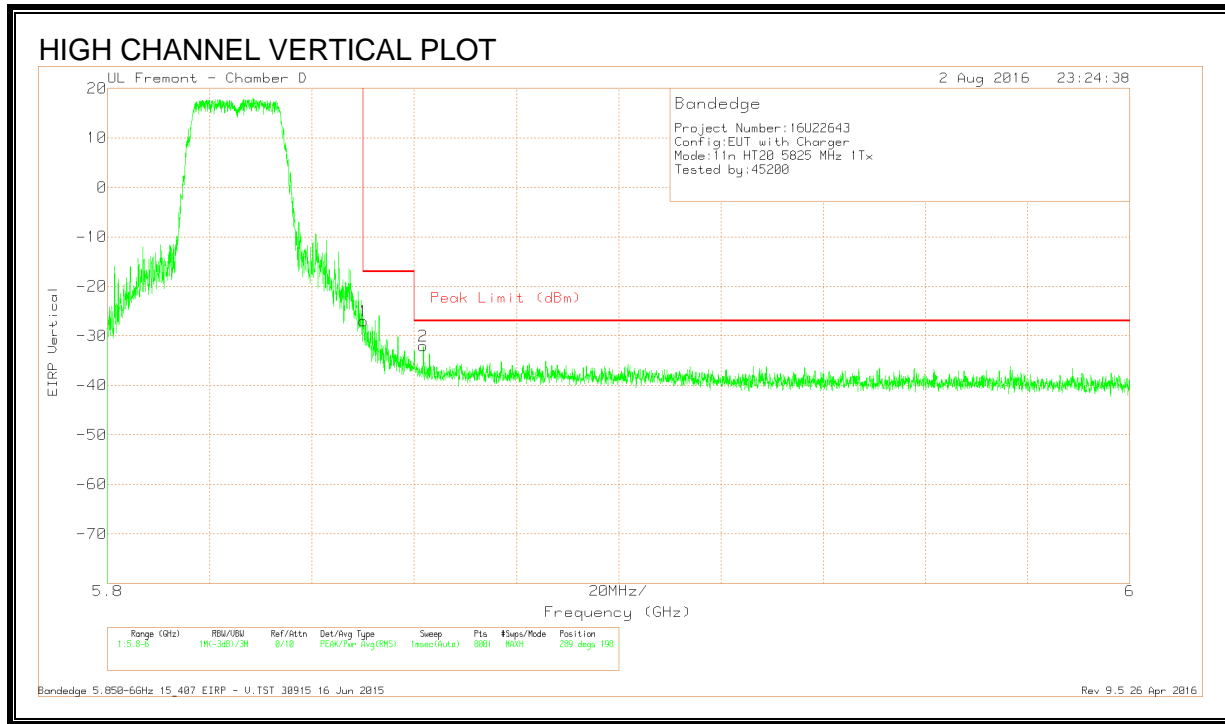


DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-56.37	Pk	34.9	-17.3	11.8	-26.97	-17	-9.97	289	198	V
2	5.862	-61.41	Pk	34.9	-17.3	11.8	-32.01	-27	-5.01	289	198	V

Pk - Peak detector


RESTRICTED BANDEDGE, CHAIN 2 (LOW CHANNEL) (FCC)

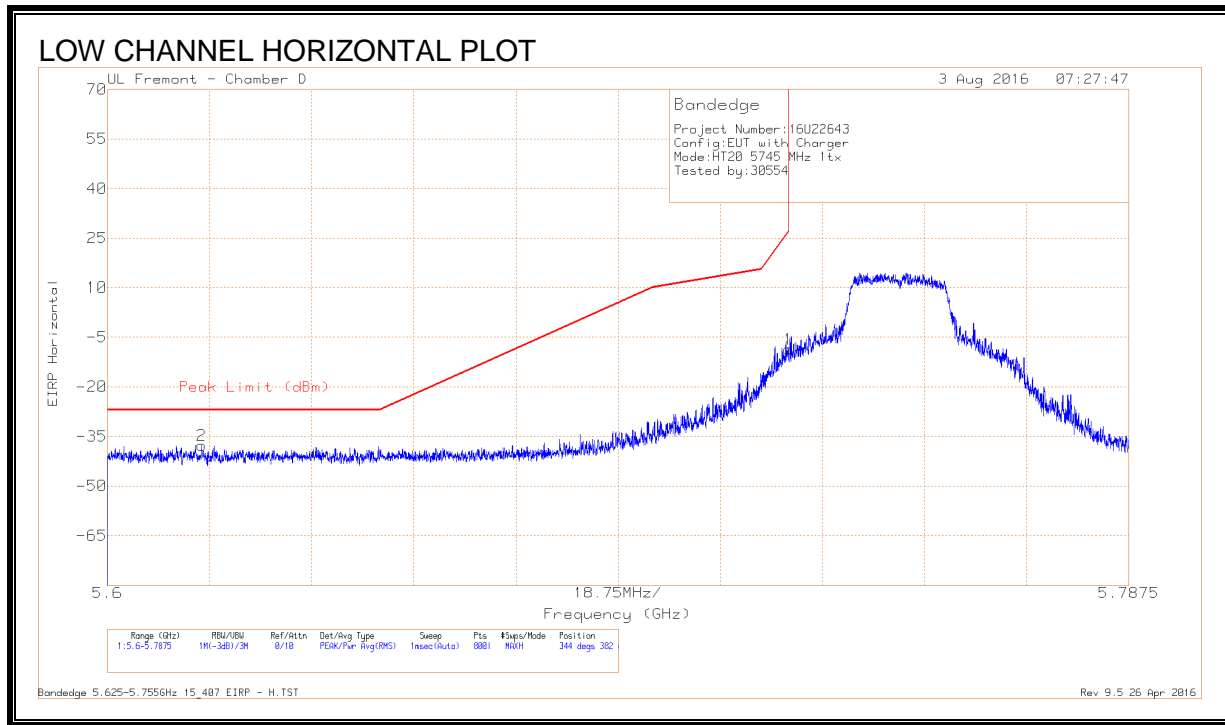

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.617	-66.55	Pk	34.5	-17.4	11.8	-37.65	-27	-10.65	344	382	H
1	5.725	-37.99	Pk	34.8	-17.3	11.8	-8.69	26.99	-35.68	344	382	H

Pk - Peak detector

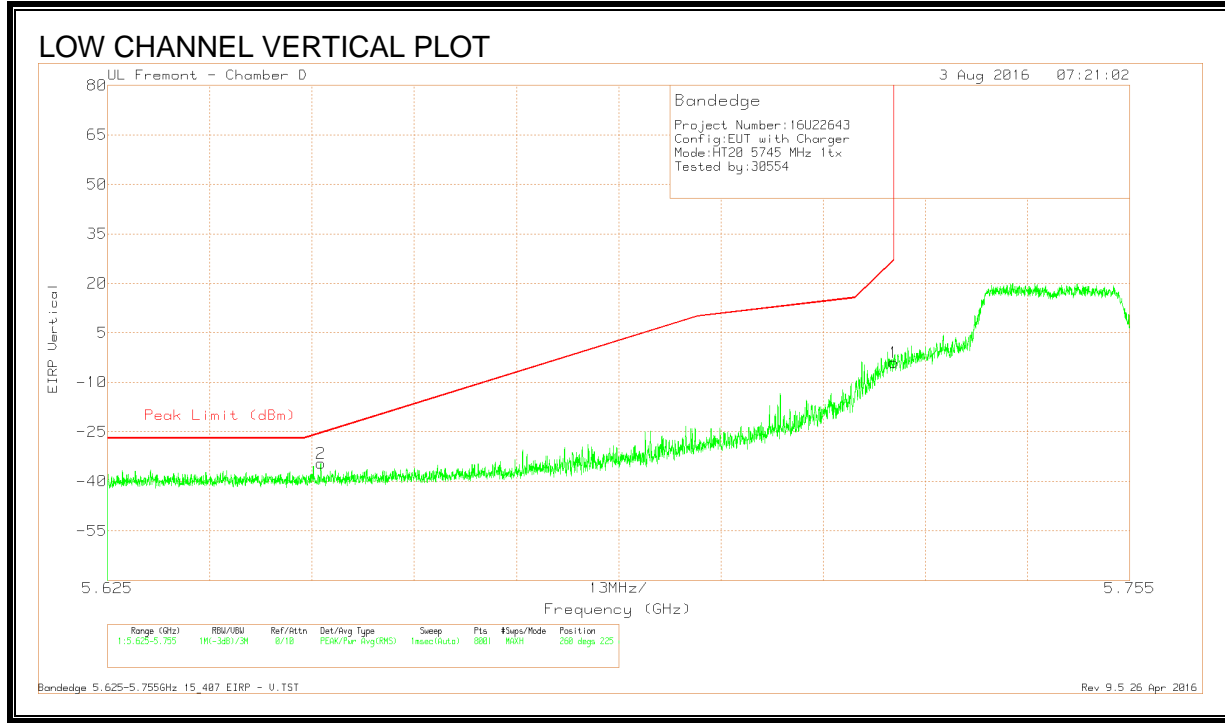


DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.652	-63.68	Pk	34.6	-17.3	11.8	-34.58	-25.44	-9.14	260	225	V
1	5.725	-33.21	Pk	34.8	-17.3	11.8	-3.91	26.97	-30.88	260	225	V

Pk - Peak detector


RESTRICTED BANDEDGE, CHAIN 2 (HIGH CHANNEL) (FCC)

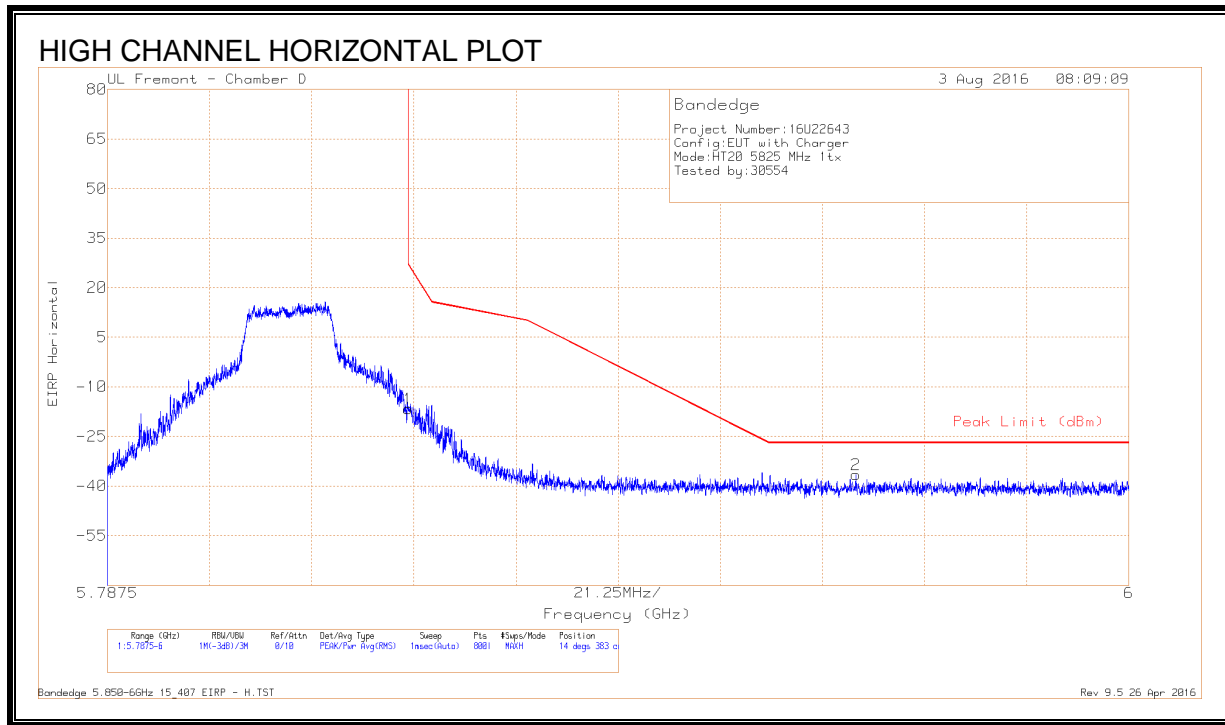

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-45.99	Pk	34.9	-17.3	11.8	-16.59	26.99	-43.58	14	383	H
2	5.943	-66.08	Pk	35	-17.2	11.8	-36.48	-27	-9.48	14	383	H

Pk - Peak detector

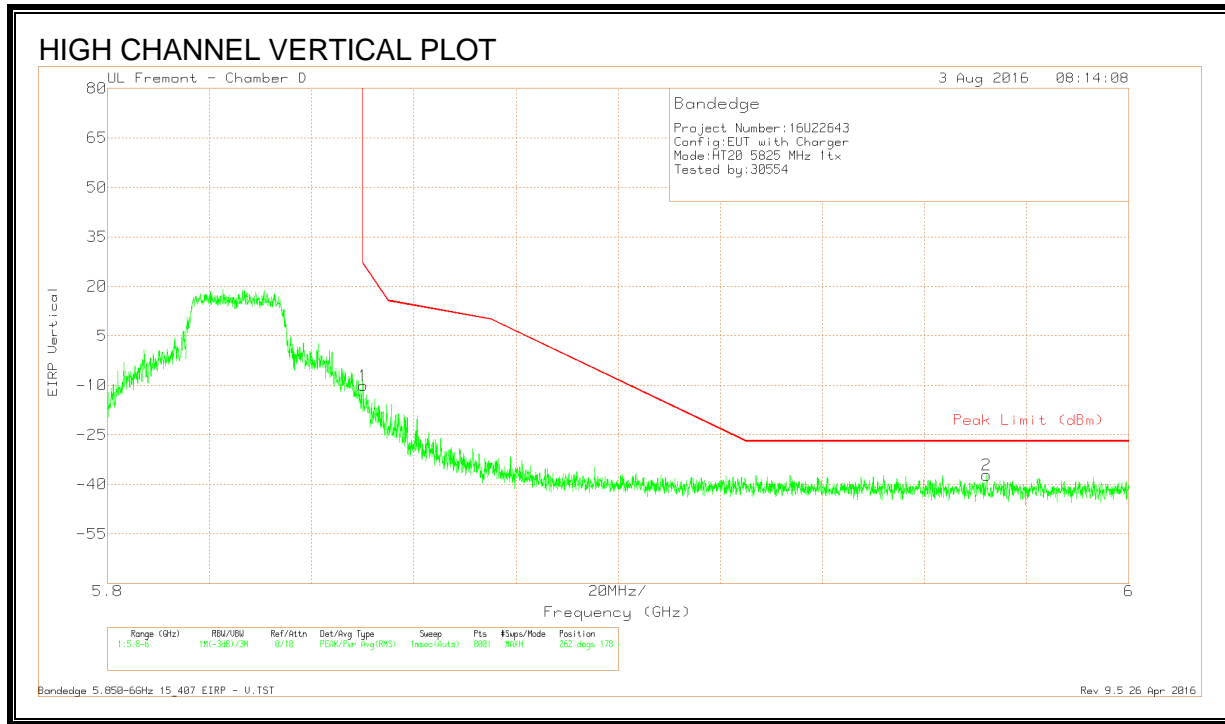


DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dbm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-39.45	Pk	34.9	-17.3	11.8	-10.05	26.94	-36.99	262	178	V
2	5.972	-66.9	Pk	35.1	-17.2	11.8	-37.2	-27	-10.2	262	178	V

Pk - Peak detector


RESTRICTED BANDEDGE , CHAIN 2 (LOW CHANNEL) (IC)

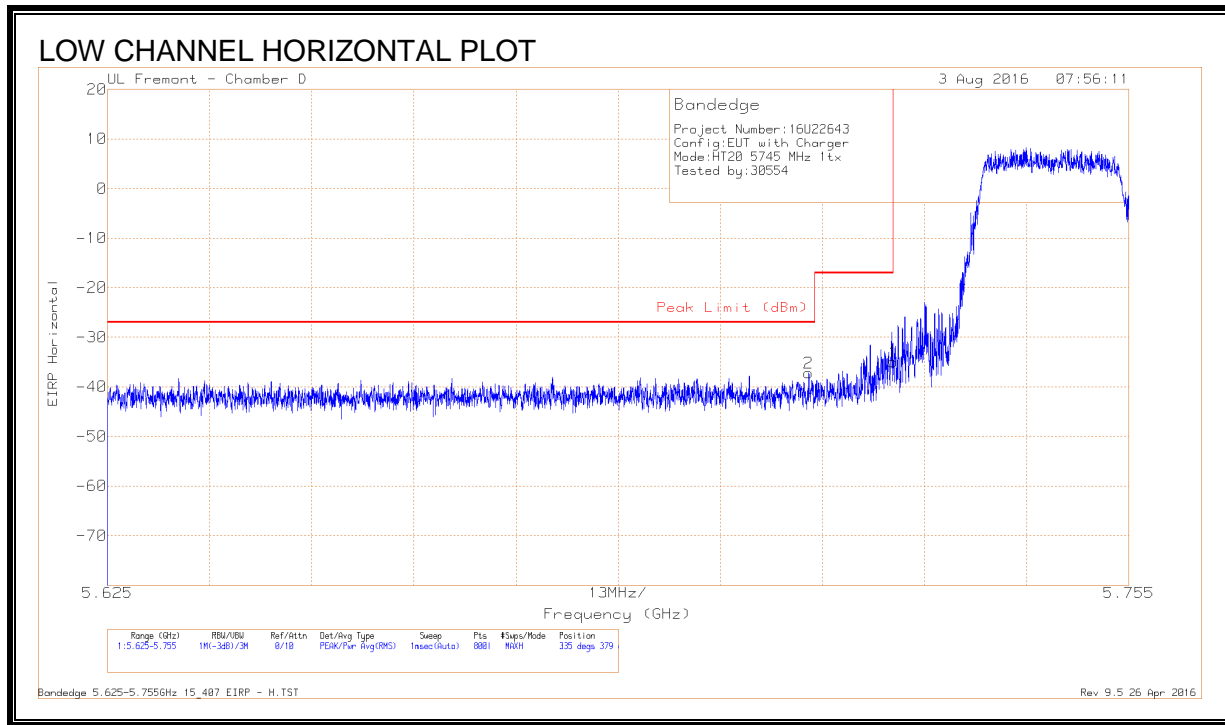

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.714	-66.56	Pk	34.8	-17.2	11.8	-37.16	-27	-10.16	335	379	H
1	5.725	-64.24	Pk	34.8	-17.3	11.8	-34.94	-17	-17.94	335	379	H

Pk - Peak detector

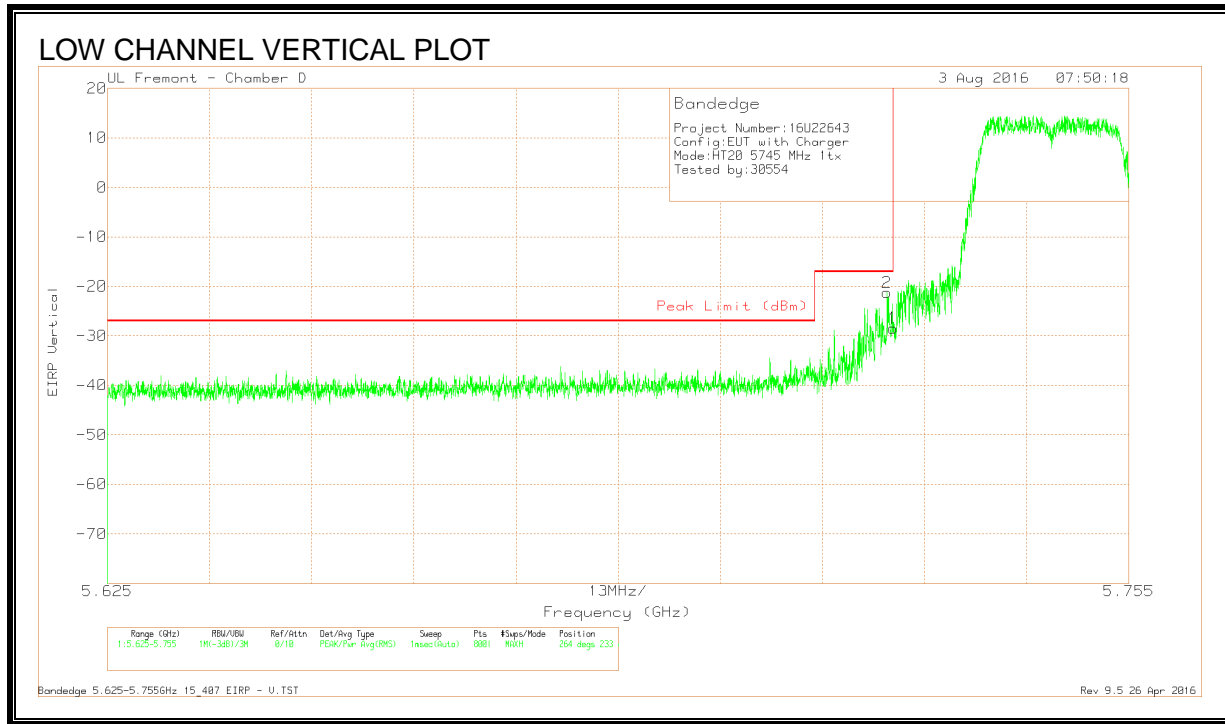


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.724	-50.51	Pk	34.8	-17.3	11.8	-21.21	-17	-4.21	264	233	V
1	5.725	-57.72	Pk	34.8	-17.3	11.8	-28.42	-17	-11.42	264	233	V

Pk - Peak detector


RESTRICTED BANDEDGE , CHAIN 2 (HIGH CHANNEL) (IC)

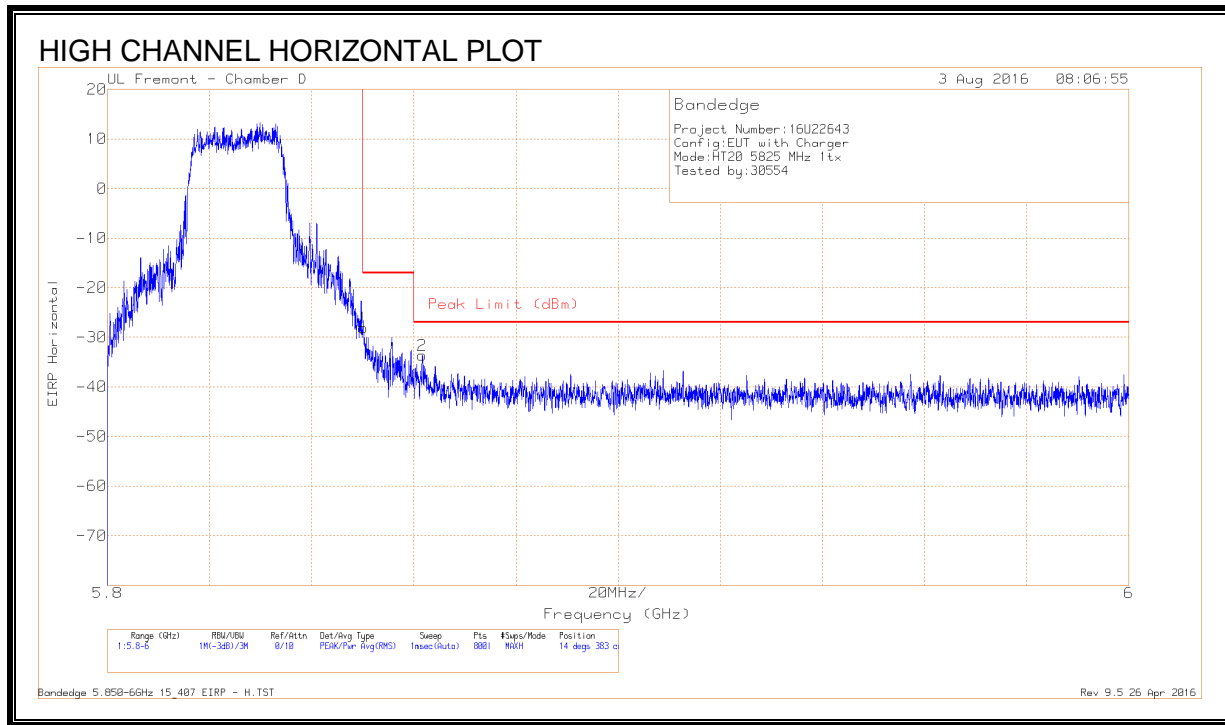

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-57.54	Pk	34.9	-17.3	11.8	-28.14	-17	-11.14	14	383	H
2	5.862	-63.09	Pk	34.9	-17.3	11.8	-33.69	-27	-6.69	14	383	H

Pk - Peak detector

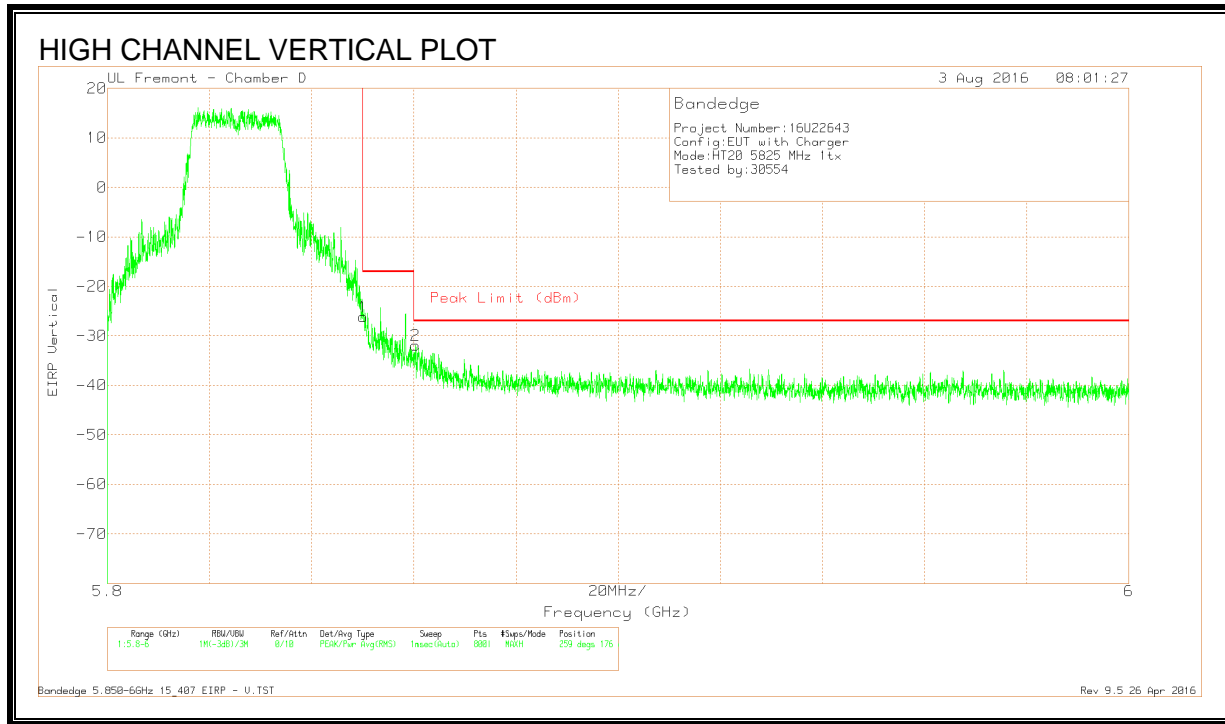


DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dbm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-55.55	Pk	34.9	-17.3	11.8	-26.15	-17	-9.15	259	176	V
2	5.86	-61.29	Pk	34.9	-17.3	11.8	-31.89	-27	-4.89	259	176	V

Pk - Peak detector

8.126. 802.11n HT20 2Tx (CHAIN 0 + CHAIN 1) CDD MODE IN THE 5.8 GHz BAND


RESTRICTED BANDEGE (LOW CHANNEL) (FCC)

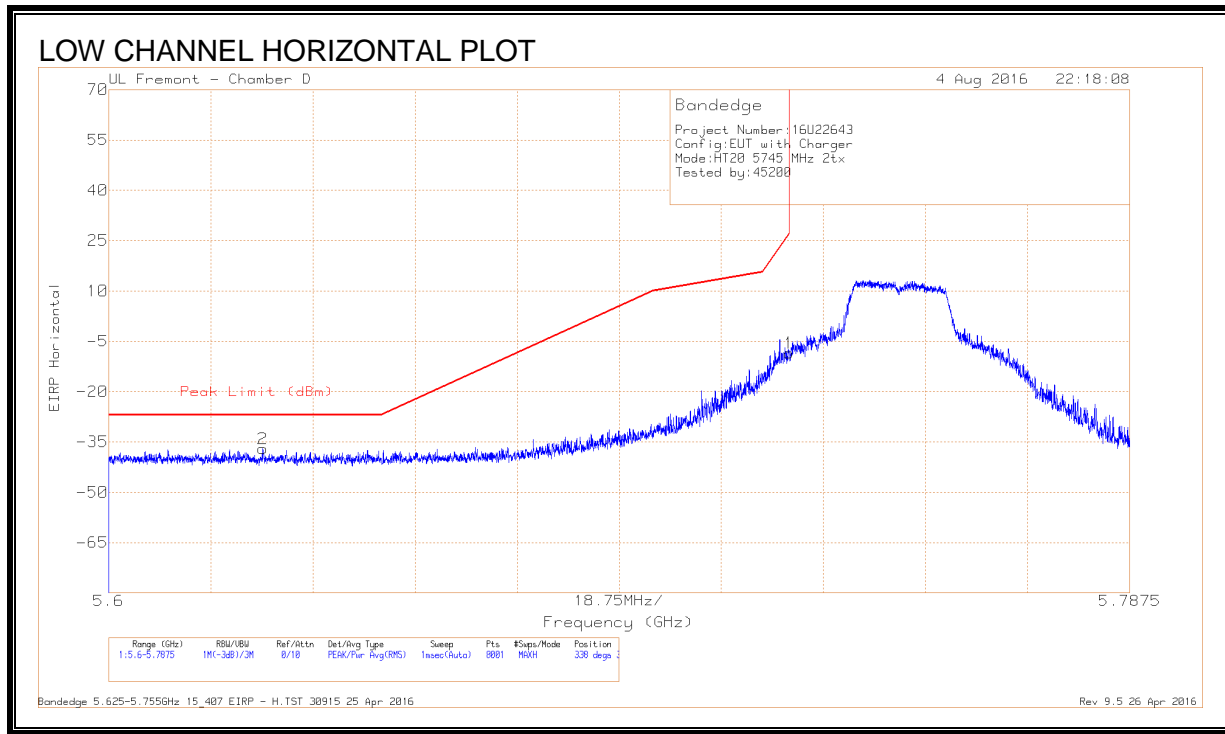

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.628	-66.04	Pk	34.6	-17.4	11.8	-37.04	-27	-10.04	338	346	H
1	5.725	-37.81	Pk	34.8	-17.3	11.8	-8.51	26.99	-35.5	338	346	H

Pk - Peak detector

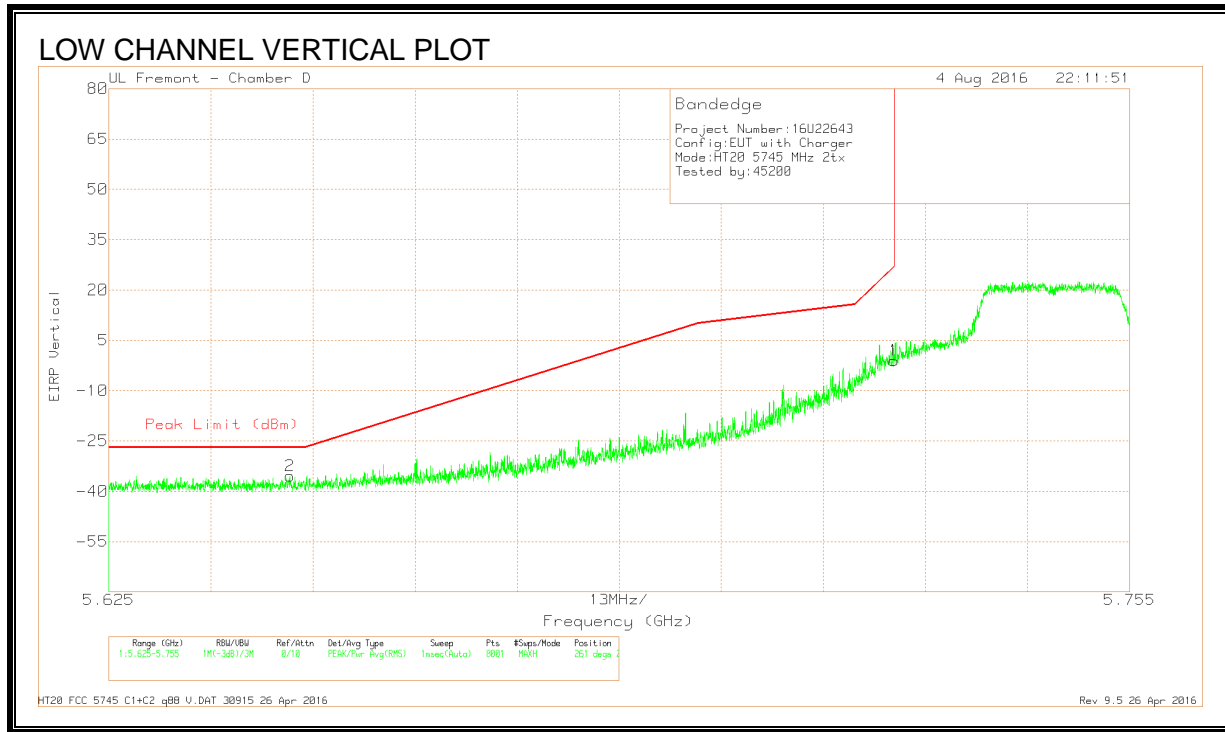


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb1/Fitr/Pa d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.648	-64.51	Pk	34.6	-17.3	11.8	-35.41	-27	-8.41	261	211	V
1	5.725	-30.29	Pk	34.8	-17.3	11.8	-.99	26.97	-27.96	261	211	V

Pk - Peak detector


RESTRICTED BANDEDGE (HIGH CHANNEL) (FCC)

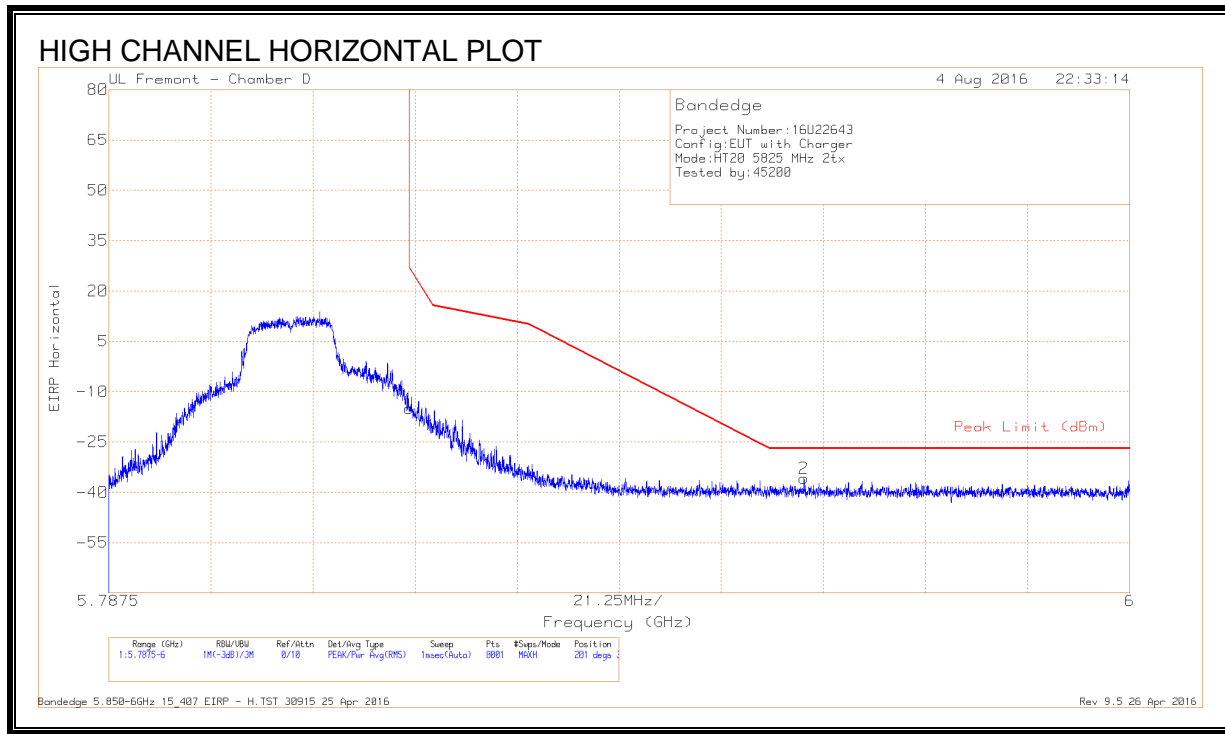

DATA

Marker	Frequency (GHz)	Meter Reading (dbm)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-44.41	Pk	34.9	-17.3	11.8	-15.01	26.99	-42	201	385	H
2	5.932	-65.53	Pk	35	-17.1	11.8	-35.83	-27	-8.83	201	385	H

Pk - Peak detector

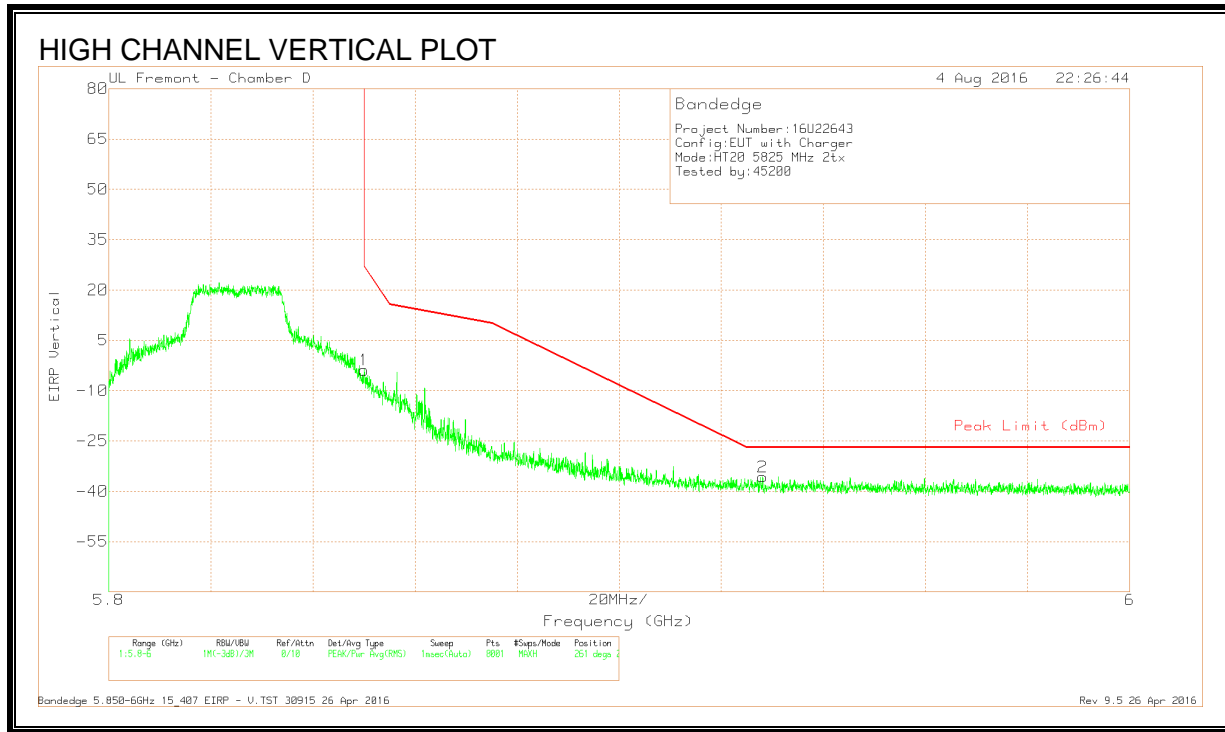


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb1/Fitr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-33.27	Pk	34.9	-17.3	11.8	-3.87	26.94	-30.81	261	215	V
2	5.928	-65.39	Pk	35	-17.1	11.8	-35.69	-27	-8.69	261	215	V

Pk - Peak detector


RESTRICTED BANDEDGE (LOW CHANNEL) (IC)

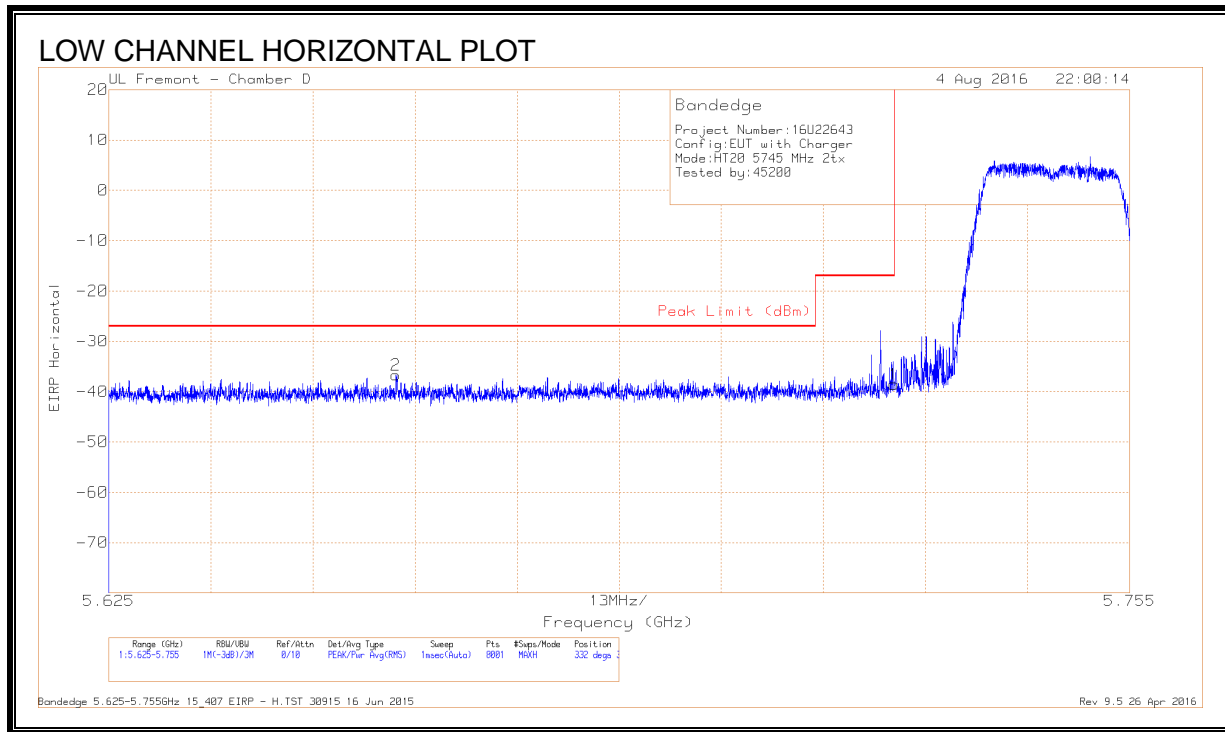

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb/Fltr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.662	-65.89	Pk	34.6	-17.2	11.8	-36.69	-27	-9.69	332	360	H
1	5.725	-67.86	Pk	34.8	-17.3	11.8	-38.56	-17	-21.56	332	360	H

Pk - Peak detector

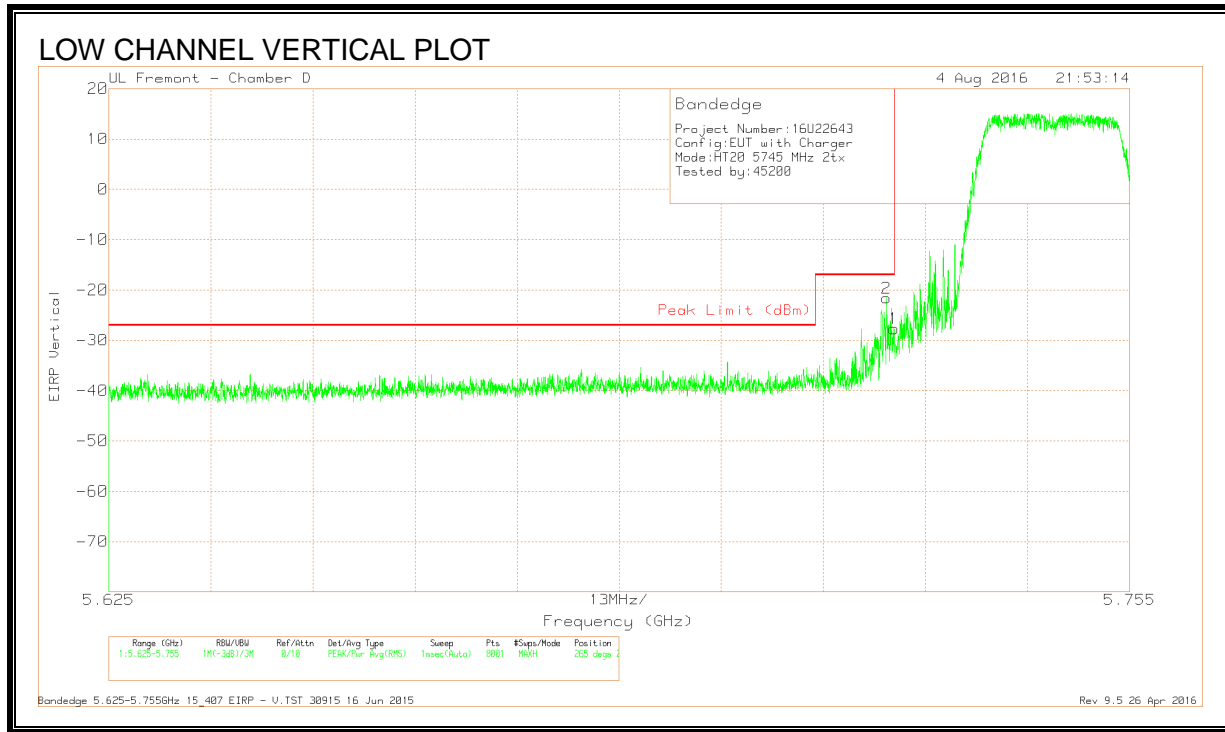


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cb1/Fitr/Par d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.724	-50.89	Pk	34.8	-17.3	11.8	-21.59	-17	-4.59	265	214	V
1	5.725	-56.99	Pk	34.8	-17.3	11.8	-27.69	-17	-10.69	265	214	V

Pk - Peak detector


RESTRICTED BANDEDGE (HIGH CHANNEL) (IC)

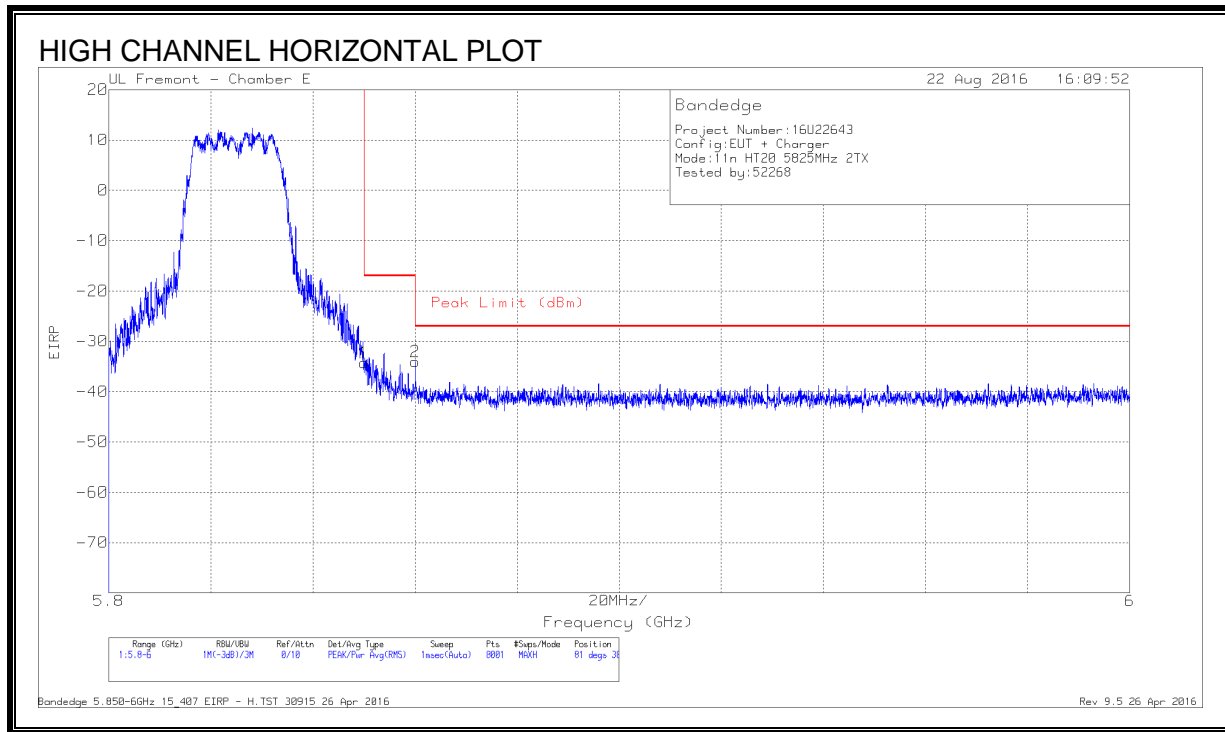

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cb/Filtr/PA d (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-60.65	Pk	34.9	-20.3	11.8	-34.25	-17	-17.25	81	386	H
2	5.86	-60.33	Pk	34.9	-20.4	11.8	-34.03	-27	-7.03	81	386	H

Pk - Peak detector

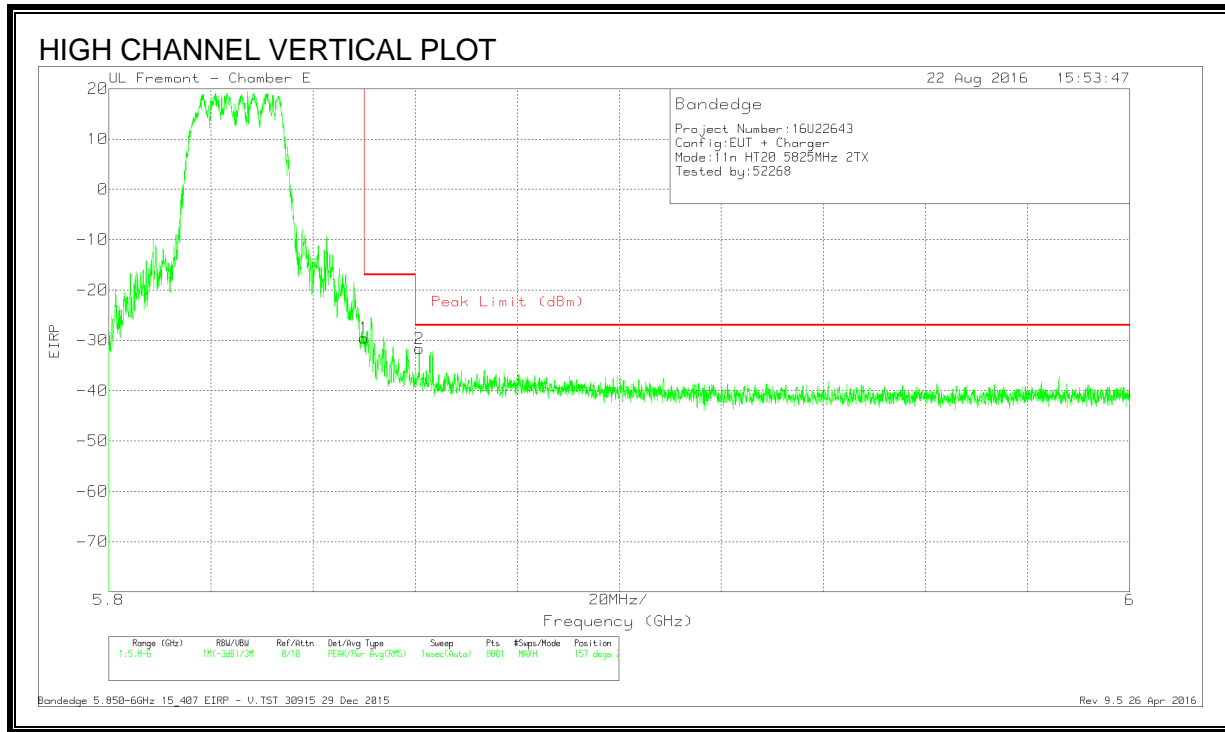


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T711 (dB/m)	Amp/Cb/Fitr/Parad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-55.93	Pk	34.9	-20.3	11.8	-29.53	-17	-12.53	157	223	V
2	5.861	-57.93	Pk	34.9	-20.4	11.8	-31.63	-27	-4.63	157	223	V

Pk - Peak detector

8.127. 802.11n HT20 2Tx (CHAIN 0 + CHAIN 1) STBC MODE IN THE 5.8 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL) (FCC)

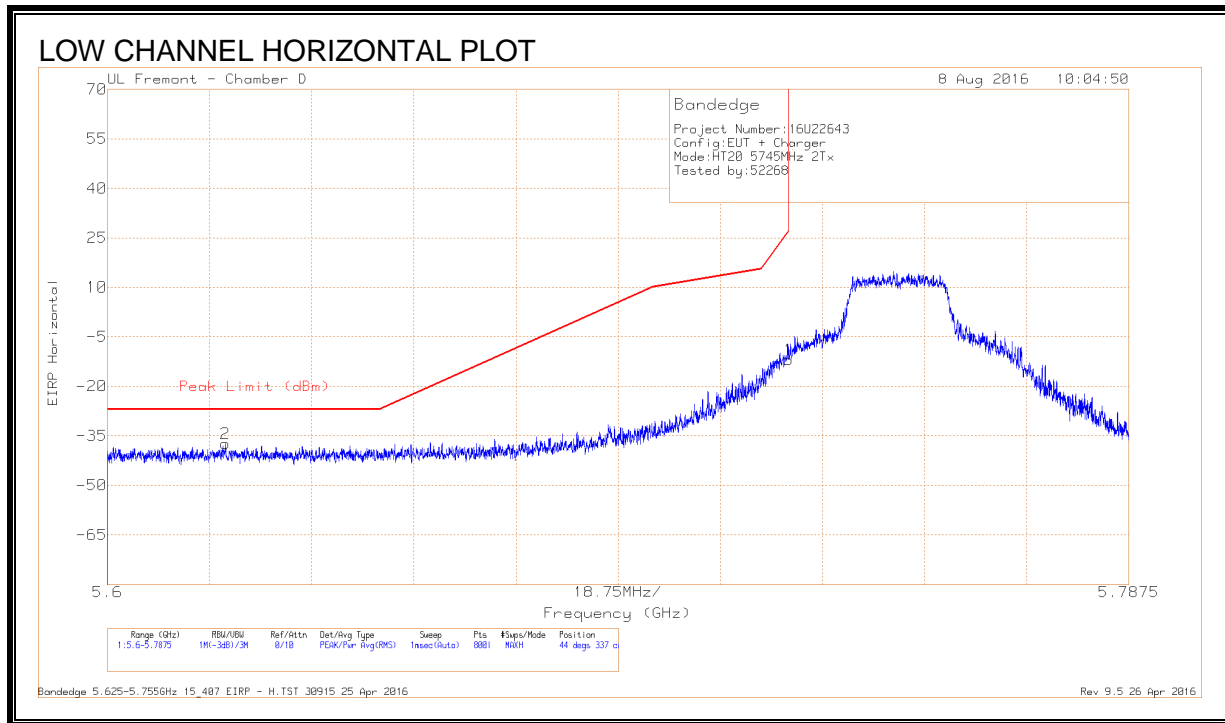

DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.622	-66.32	Pk	34.5	-17.4	11.8	-37.42	-27	-10.42	44	337	H
1	5.725	-41.19	Pk	34.8	-17.3	11.8	-11.89	26.99	-38.88	44	337	H

Pk - Peak detector