


RESTRICTED BANDEDGE (HIGH CHANNEL, CH 13)

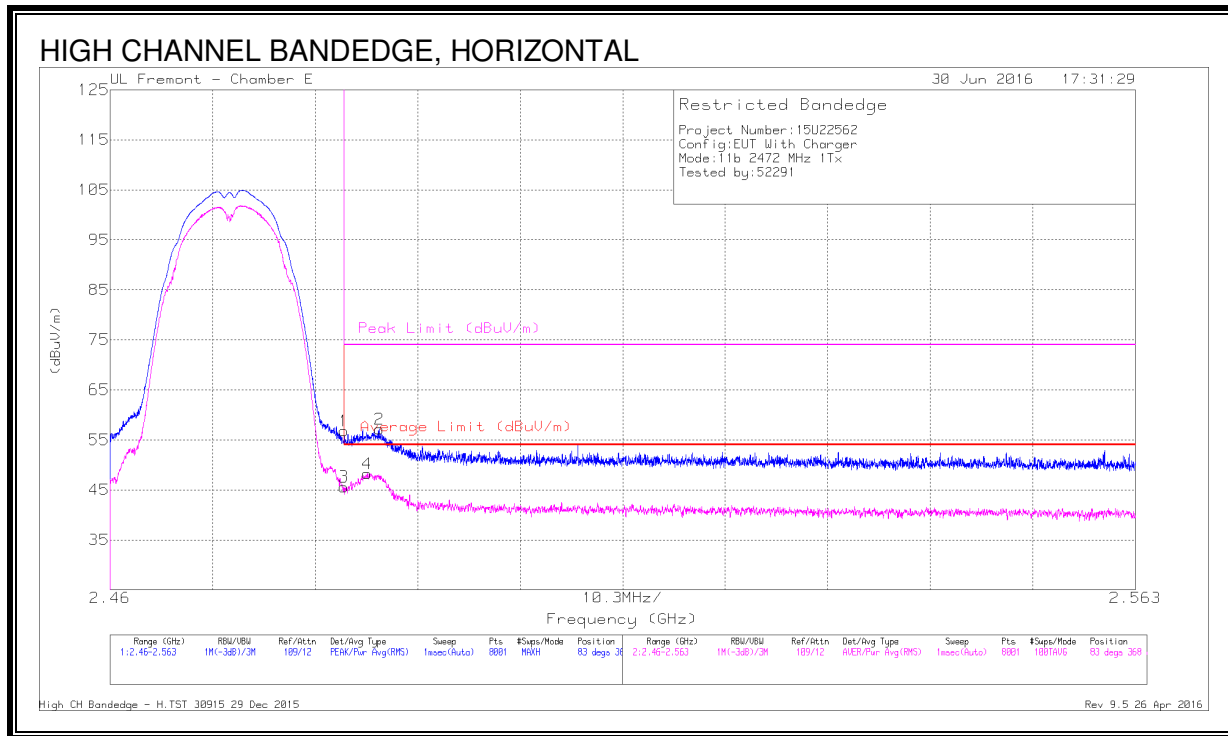


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.48	Pk	32.3	-20	56.78	-	-	74	-17.22	83	368	H
3	* 2.484	33.31	RMS	32.3	-20	45.61	54	-8.39	-	-	83	368	H
4	* 2.486	36.04	RMS	32.3	-20.1	48.24	54	-5.76	-	-	83	368	H
2	* 2.487	44.97	Pk	32.3	-20.1	57.17	-	-	74	-16.83	83	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

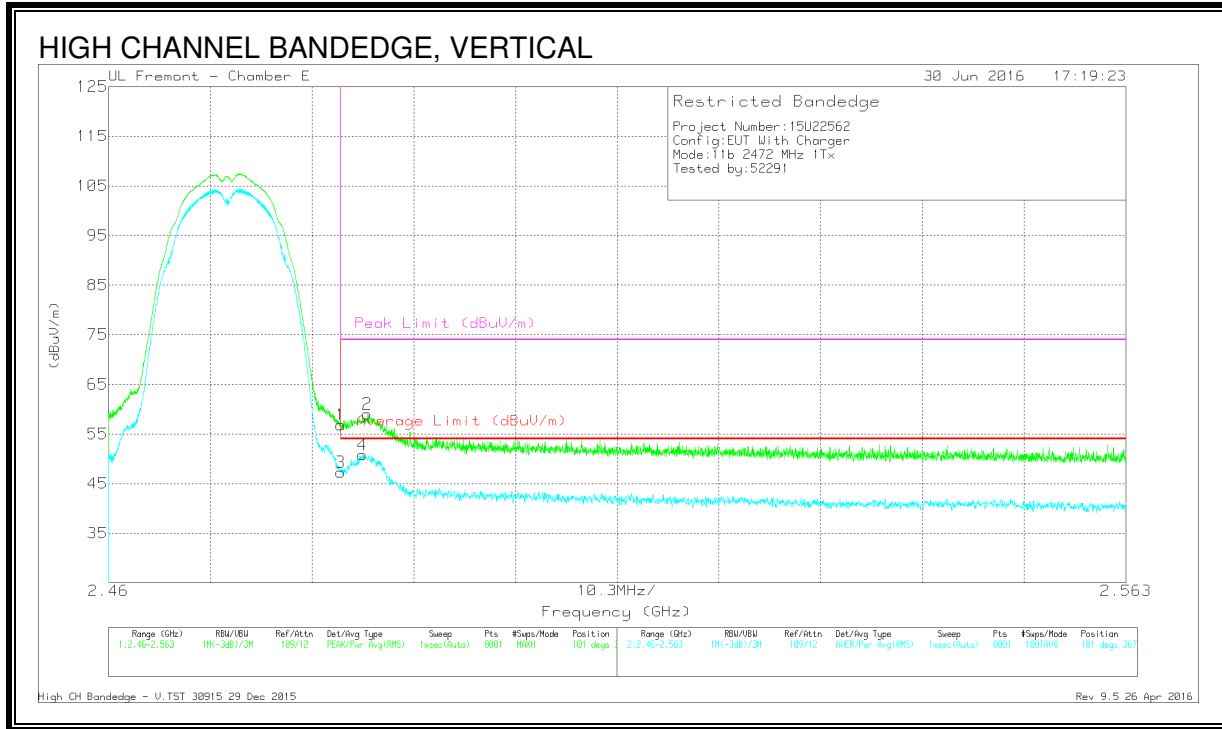

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.57	Pk	32.3	-20	56.87	-	-	74	-17.13	101	367	V
3	* 2.484	35	RMS	32.3	-20	47.3	54	-6.7	-	-	101	367	V
2	* 2.486	46.85	Pk	32.3	-20.1	59.05	-	-	74	-14.95	101	367	V
4	* 2.486	38.59	RMS	32.3	-20.1	50.79	54	-3.21	-	-	101	367	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 1)

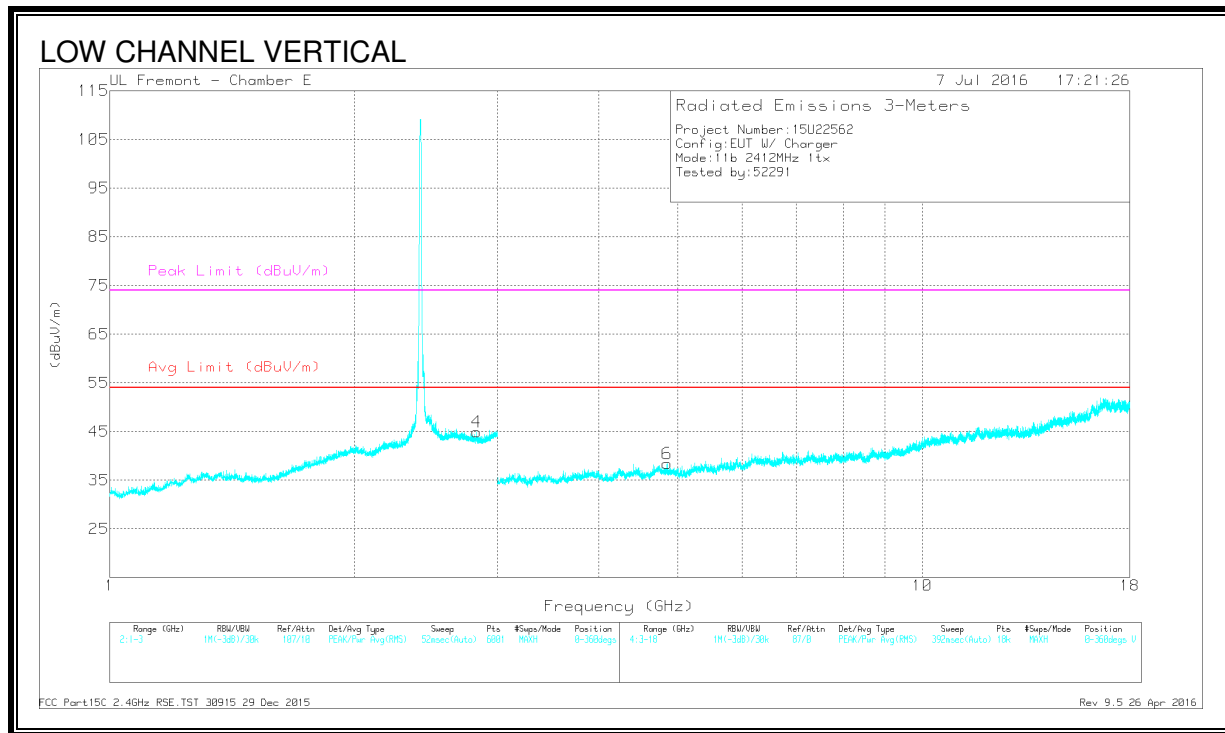
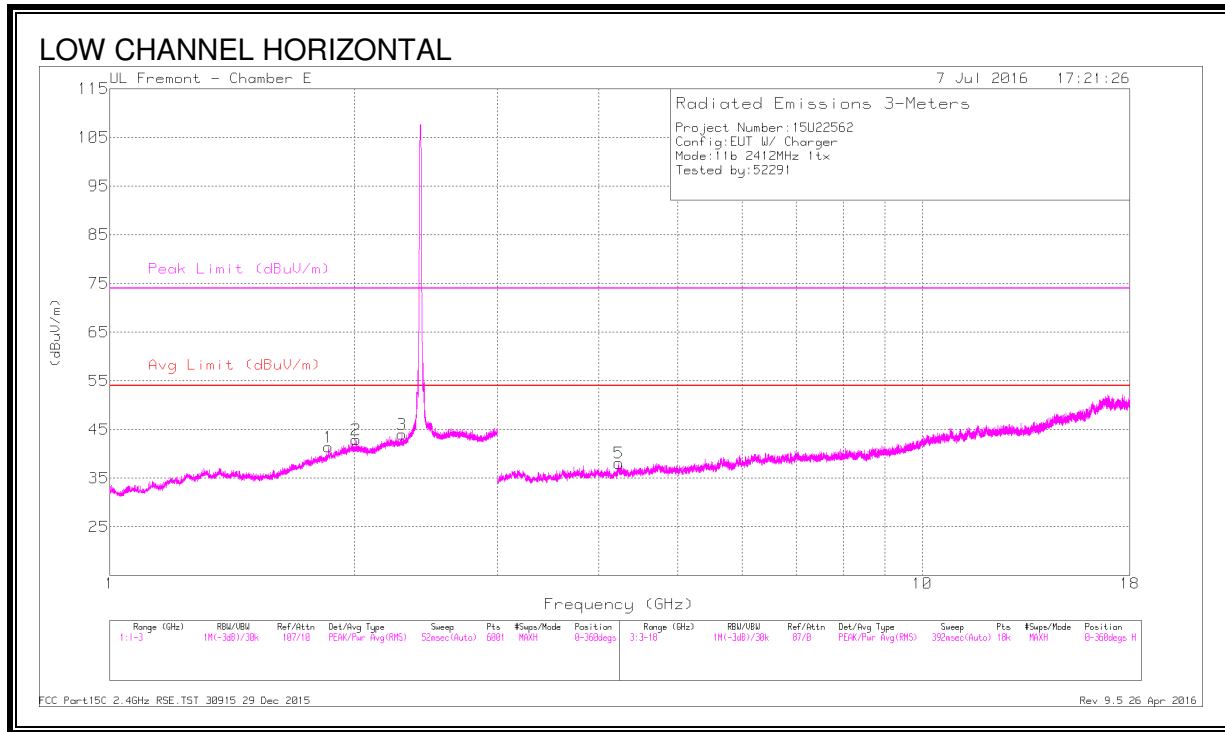


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Parad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 2.29	39.03	PK2	31.5	-20.1	50.43	-	-	74	-23.57	198	159	H
	* 2.288	27.2	MAv1	31.5	-20.1	38.6	54	-15.4	-	-	198	159	H
4	* 2.826	38	PK2	32.3	-19.9	50.4	-	-	74	-23.6	11	122	V
	* 2.828	26.39	MAv1	32.3	-19.9	38.79	54	-15.21	-	-	11	122	V
5	* 4.232	39.79	PK2	33.3	-29	44.09	-	-	74	-29.91	54	258	H
	* 4.233	28.79	MAv1	33.3	-29	33.09	54	-20.91	-	-	54	258	H
6	* 4.855	40.57	PK2	34	-30.3	44.27	-	-	74	-29.73	179	101	V
	* 4.853	29.59	MAv1	34	-30.3	33.29	54	-20.71	-	-	179	101	V
1	1.86	36.8	PK2	31	-20.9	46.9	-	-	-	-	238	111	H
2	2.01	37.96	PK2	31.8	-20.5	49.26	-	-	-	-	196	140	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 6)

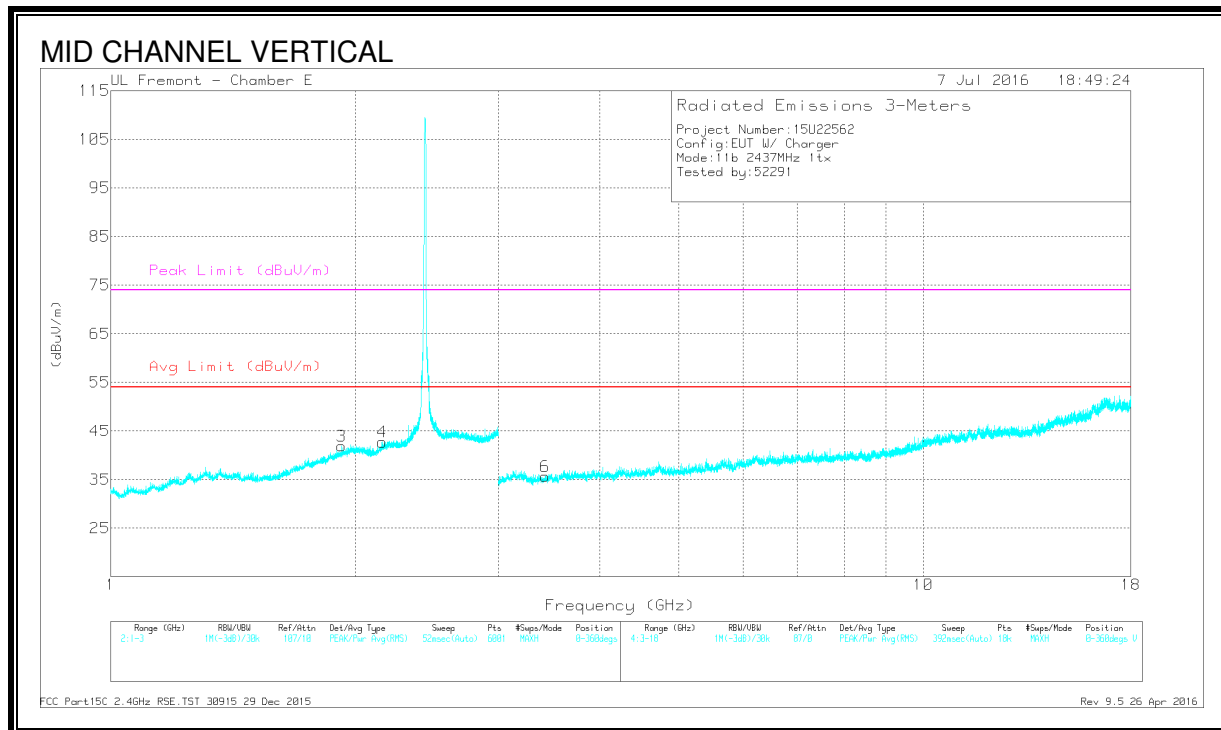
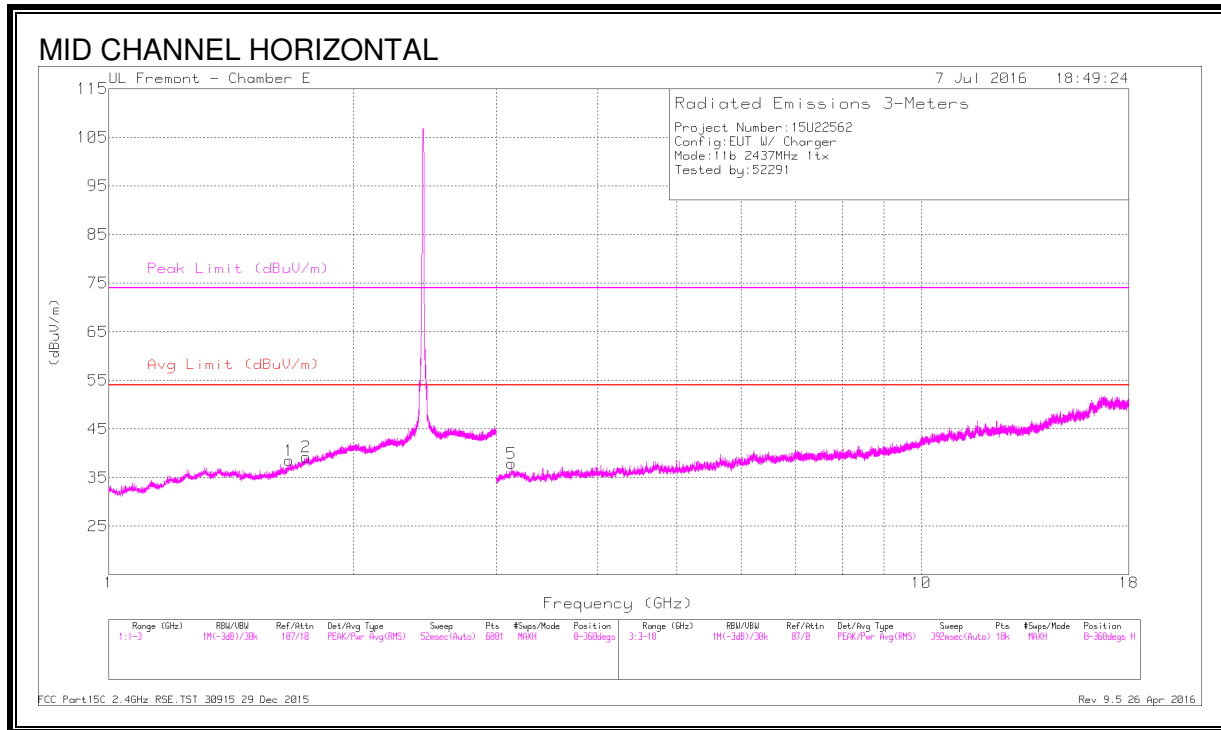


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Parad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.669	36.26	PK2	28.7	-21.1	43.86	-	-	74	-30.14	315	190	H
	* 1.667	25.04	MAv1	28.7	-21.1	32.64	54	-21.36	-	-	315	190	H
2	1.75	36.56	PK2	29.8	-20.8	45.56	-	-	-	-	185	199	H
3	1.922	36.64	PK2	31.4	-20.6	47.44	-	-	-	-	357	114	V
4	2.158	37.33	PK2	31.4	-20.3	48.43	-	-	-	-	319	101	V
5	3.13	41.09	PK2	33.1	-29.9	44.29	-	-	-	-	134	200	H
6	3.423	40.46	PK2	32.9	-30.9	42.46	-	-	-	-	134	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 11)

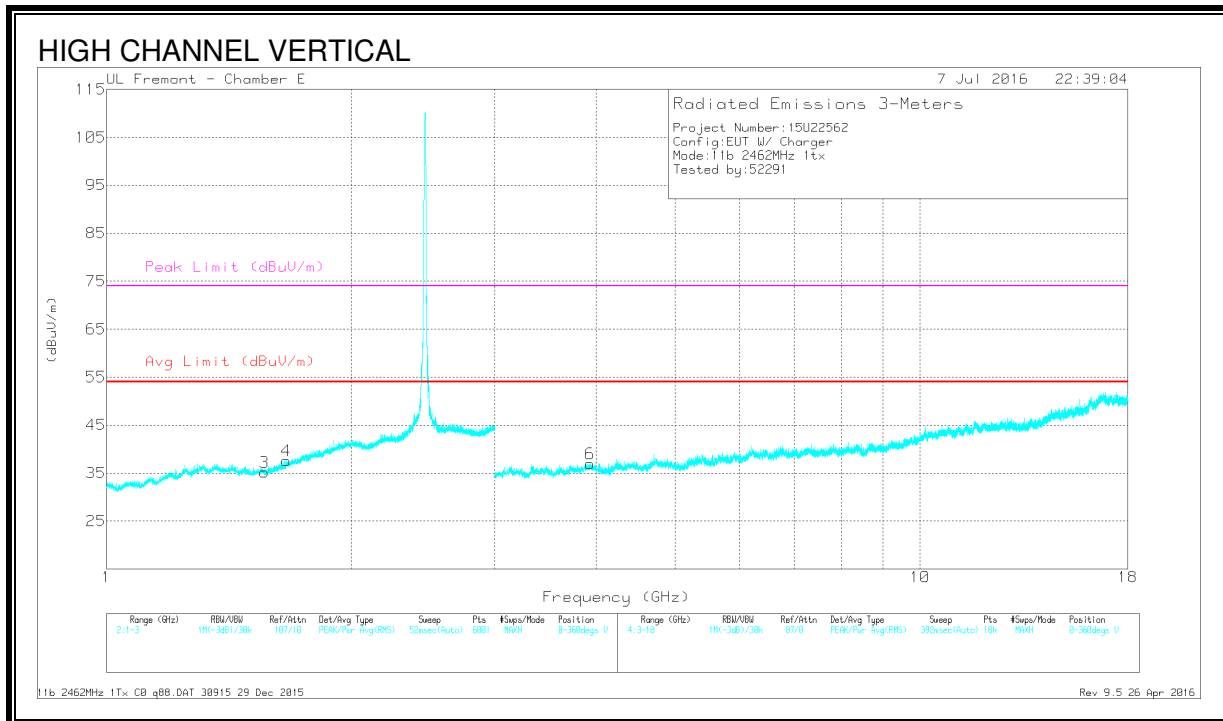
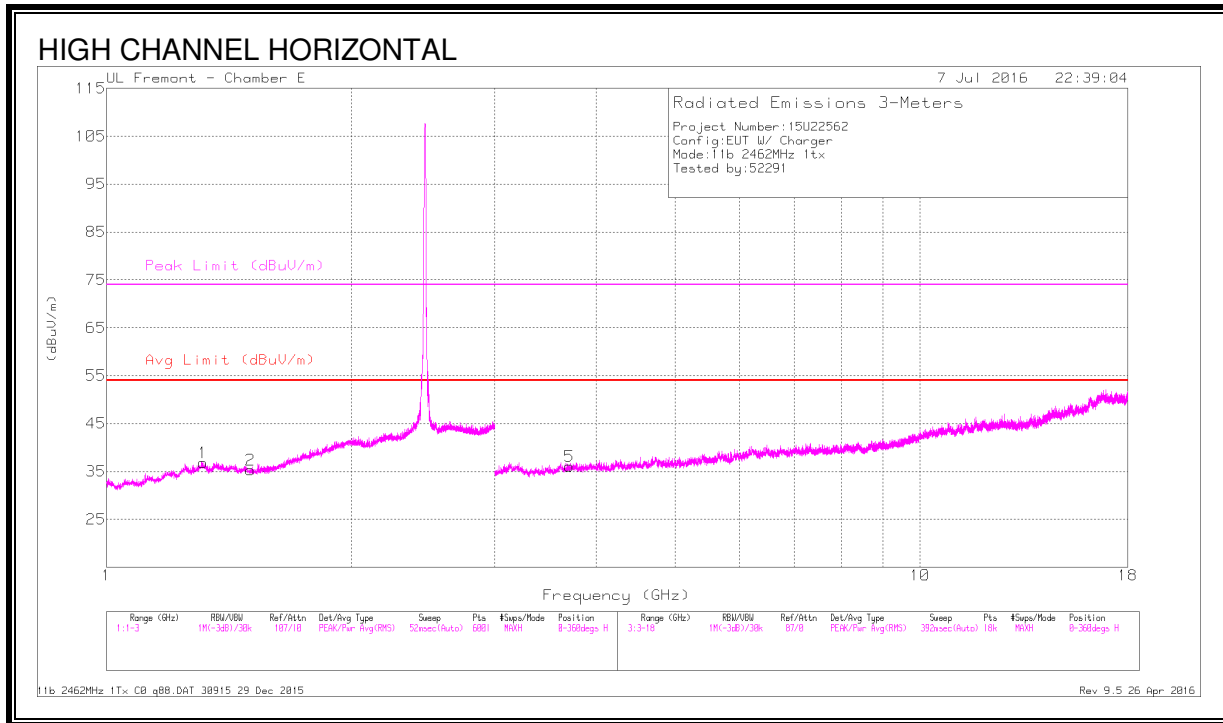


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.315	36.42	PK2	29.3	-22.3	43.42	-	-	74	-30.58	96	218	H
	* 1.314	25.21	MAv1	29.3	-22.3	32.21	54	-21.79	-	-	96	218	H
2	* 1.503	36.32	PK2	27.7	-21.5	42.52	-	-	74	-31.48	121	193	H
	* 1.502	25.54	MAv1	27.7	-21.5	31.74	54	-22.26	-	-	121	193	H
3	* 1.564	36.34	PK2	27.8	-21.5	42.64	-	-	74	-31.36	74	155	V
	* 1.563	25.65	MAv1	27.8	-21.5	31.95	54	-22.05	-	-	74	155	V
4	* 1.664	36.84	PK2	28.7	-21.2	44.34	-	-	74	-29.66	36	200	V
	* 1.665	25.55	MAv1	28.7	-21.2	33.05	54	-20.95	-	-	36	200	V
5	* 3.708	40.15	PK2	33.1	-30.3	42.95	-	-	74	-31.05	97	169	H
	* 3.708	29.84	MAv1	33.1	-30.3	32.64	54	-21.36	-	-	97	169	H
6	* 3.93	40.95	PK2	33.3	-29.7	44.55	-	-	74	-29.45	183	101	V
	* 3.929	29.37	MAv1	33.3	-29.7	32.97	54	-21.03	-	-	183	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 12)

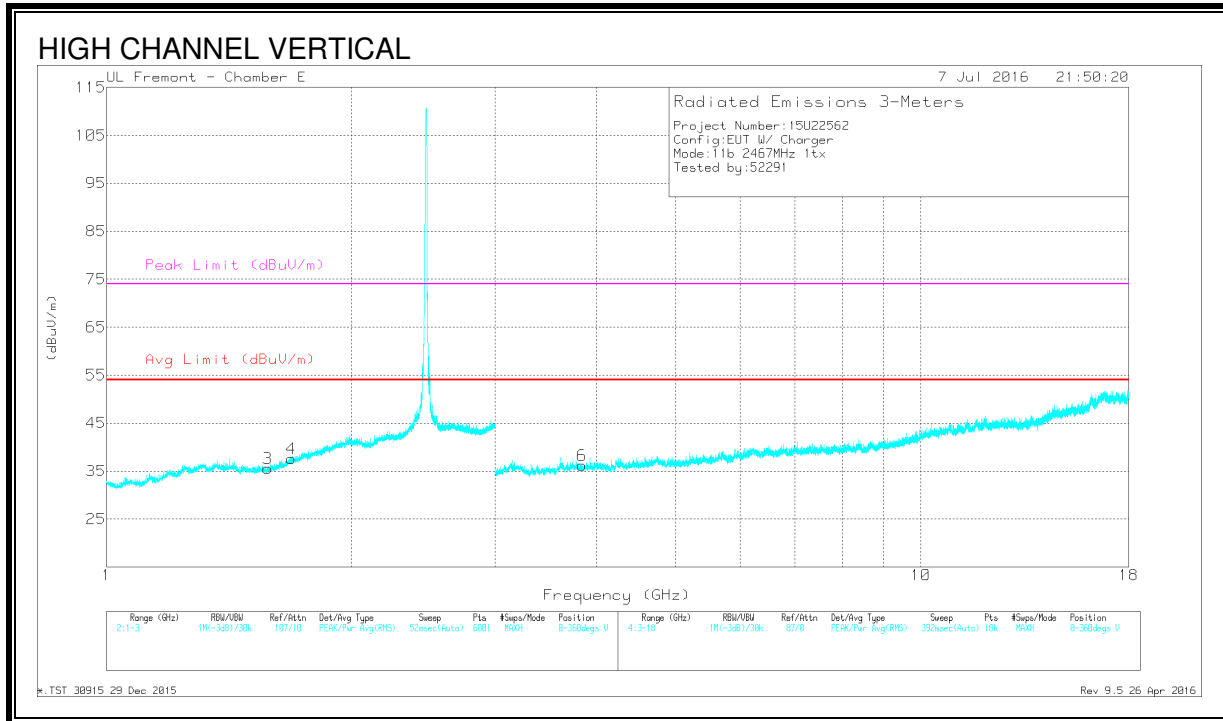
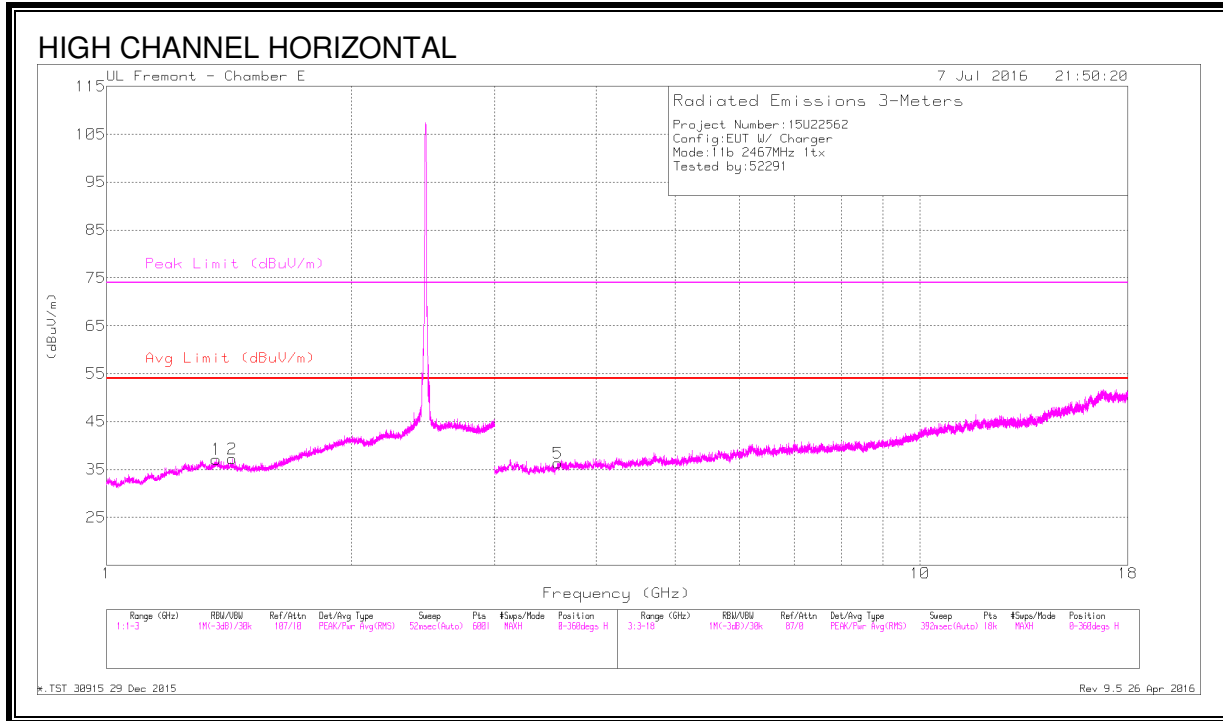


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.364	37.04	PK2	29.2	-22.1	44.14	-	-	74	-29.86	22	274	H
	* 1.364	25.17	MAv1	29.2	-22.1	32.27	54	-21.73	-	-	22	274	H
2	* 1.426	36.23	PK2	28.7	-21.9	43.03	-	-	74	-30.97	77	115	H
	* 1.427	25.66	MAv1	28.7	-21.9	32.46	54	-21.54	-	-	77	115	H
3	* 1.576	37.05	PK2	27.8	-21.6	43.25	-	-	74	-30.75	53	165	V
	* 1.576	25.71	MAv1	27.8	-21.6	31.91	54	-22.09	-	-	53	165	V
4	* 1.688	36.68	PK2	29	-21.1	44.58	-	-	74	-29.42	245	101	V
	* 1.687	25.02	MAv1	29	-21.1	32.92	54	-21.08	-	-	245	101	V
5	* 3.585	41.5	PK2	33	-30.9	43.6	-	-	74	-30.4	44	130	H
	* 3.586	30.43	MAv1	33	-30.8	32.63	54	-21.37	-	-	44	130	H
6	* 3.834	40.89	PK2	33.2	-31.2	42.89	-	-	74	-31.11	111	100	V
	* 3.835	31.02	MAv1	33.2	-31.2	33.02	54	-20.98	-	-	111	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 13)

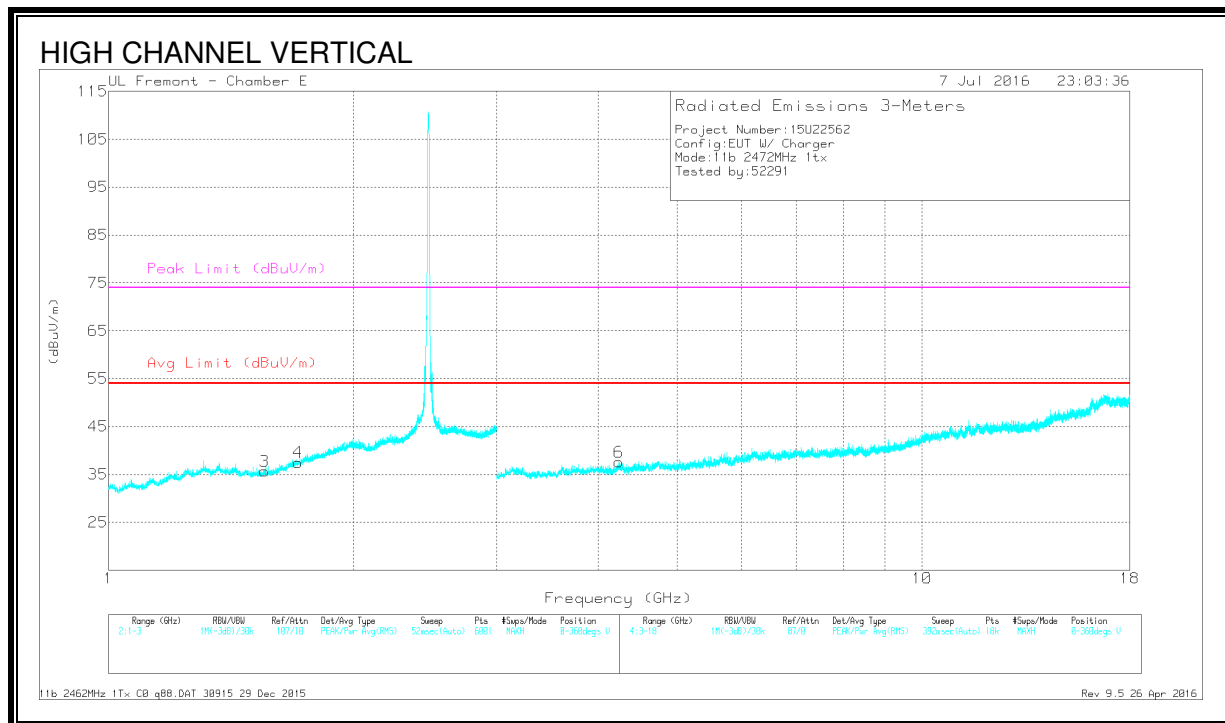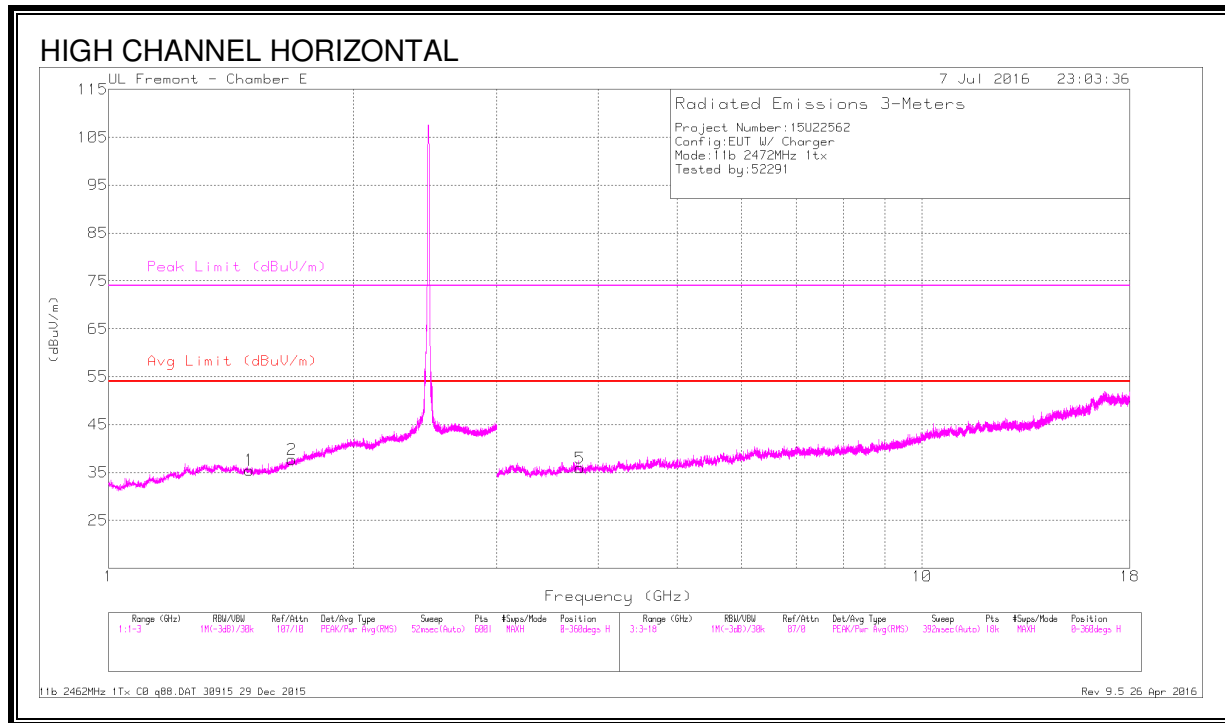


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.491	37.33	PK2	27.8	-21.6	43.53	-	-	74	-30.47	210	400	H
	* 1.488	25.21	MAv1	27.9	-21.7	31.41	54	-22.59	-	-	210	400	H
2	* 1.683	36.57	PK2	28.9	-21.1	44.37	-	-	74	-29.63	179	321	H
	* 1.682	25.7	MAv1	28.9	-21.1	33.5	54	-20.5	-	-	179	321	H
3	* 1.556	36.37	PK2	27.8	-21.4	42.77	-	-	74	-31.23	210	265	V
	* 1.556	25.61	MAv1	27.8	-21.4	32.01	54	-21.99	-	-	210	265	V
4	* 1.681	36.53	PK2	28.9	-21.1	44.33	-	-	74	-29.67	55	132	V
	* 1.679	25.84	MAv1	28.9	-21.1	33.64	54	-20.36	-	-	55	132	V
5	* 3.794	41.23	PK2	33.1	-30.7	43.63	-	-	74	-30.37	172	200	H
	* 3.796	29.89	MAv1	33.1	-30.7	32.29	54	-21.71	-	-	172	200	H
6	* 4.239	39.65	PK2	33.3	-29	43.95	-	-	74	-30.05	147	222	V
	* 4.239	29.38	MAv1	33.3	-29	33.68	54	-20.32	-	-	147	222	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

9.3. 802.11b 1Tx MODE IN THE 2.4 GHz BAND CHAIN 1

RESTRICTED BANDEGE (LOW CHANNEL, CH 1)

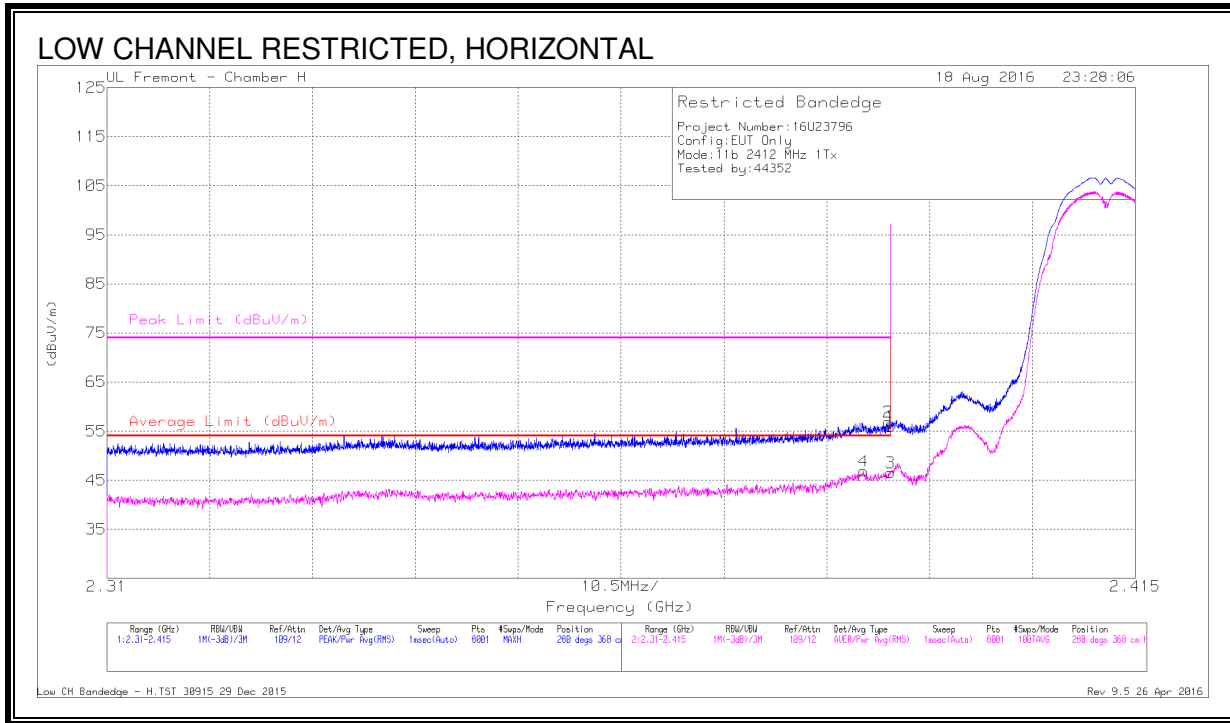


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Fltr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.57	Pk	31.9	-19.6	55.87	-	-	74	-18.13	280	368	H
2	* 2.39	44.53	Pk	31.9	-19.6	56.83	-	-	74	-17.17	280	368	H
3	* 2.39	34.21	RMS	31.9	-19.6	46.51	54	-7.49	-	-	280	368	H
4	* 2.387	34.54	RMS	31.9	-19.6	46.84	54	-7.16	-	-	280	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

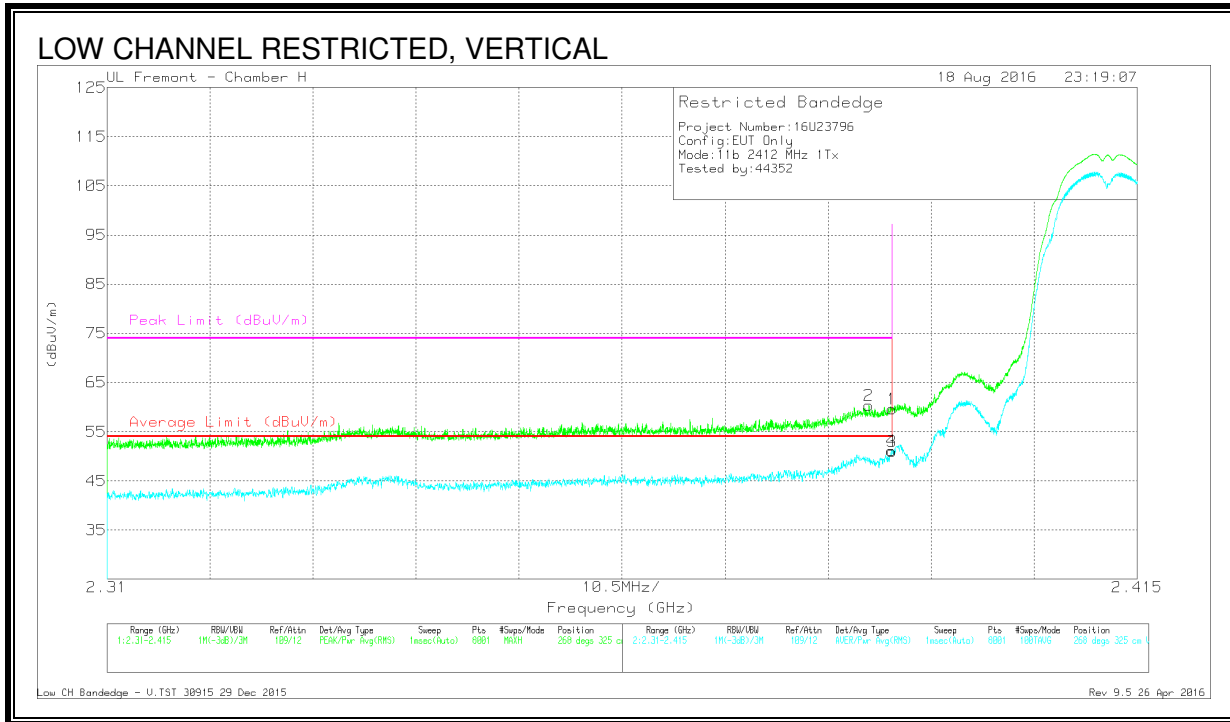

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Chl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.28	Pk	31.9	-19.6	59.58	-	-	74	-14.42	268	325	V
2	* 2.388	48.03	Pk	31.9	-19.6	60.33	-	-	74	-13.67	268	325	V
3	* 2.39	38.77	RMS	31.9	-19.6	51.07	54	-2.93	-	-	268	325	V
4	* 2.39	38.87	RMS	31.9	-19.6	51.17	54	-2.83	-	-	268	325	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL, CH 11)

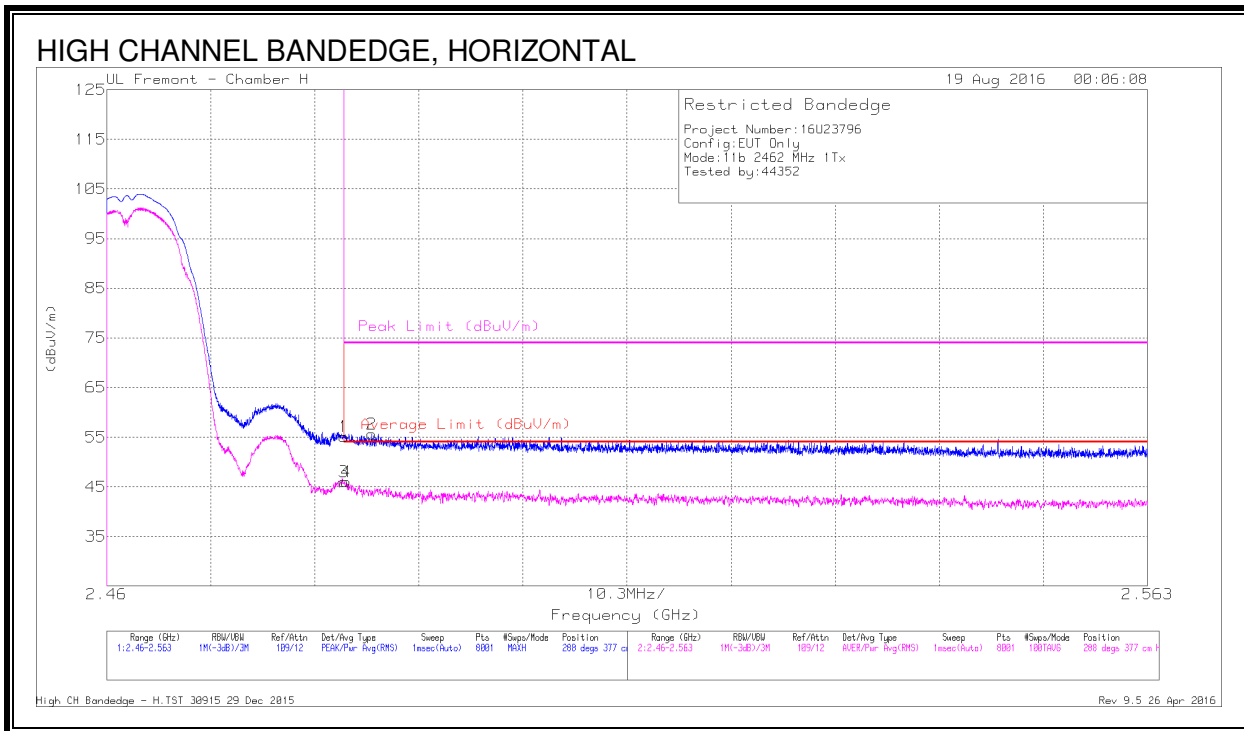


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.46	Pk	32.2	-19.5	55.16	-	-	74	-18.84	288	377	H
3	* 2.484	33.37	RMS	32.2	-19.5	46.07	54	-7.93	-	-	288	377	H
4	* 2.484	33.28	RMS	32.2	-19.5	45.98	54	-8.02	-	-	288	377	H
2	* 2.486	42.95	Pk	32.2	-19.5	55.65	-	-	74	-18.35	288	377	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

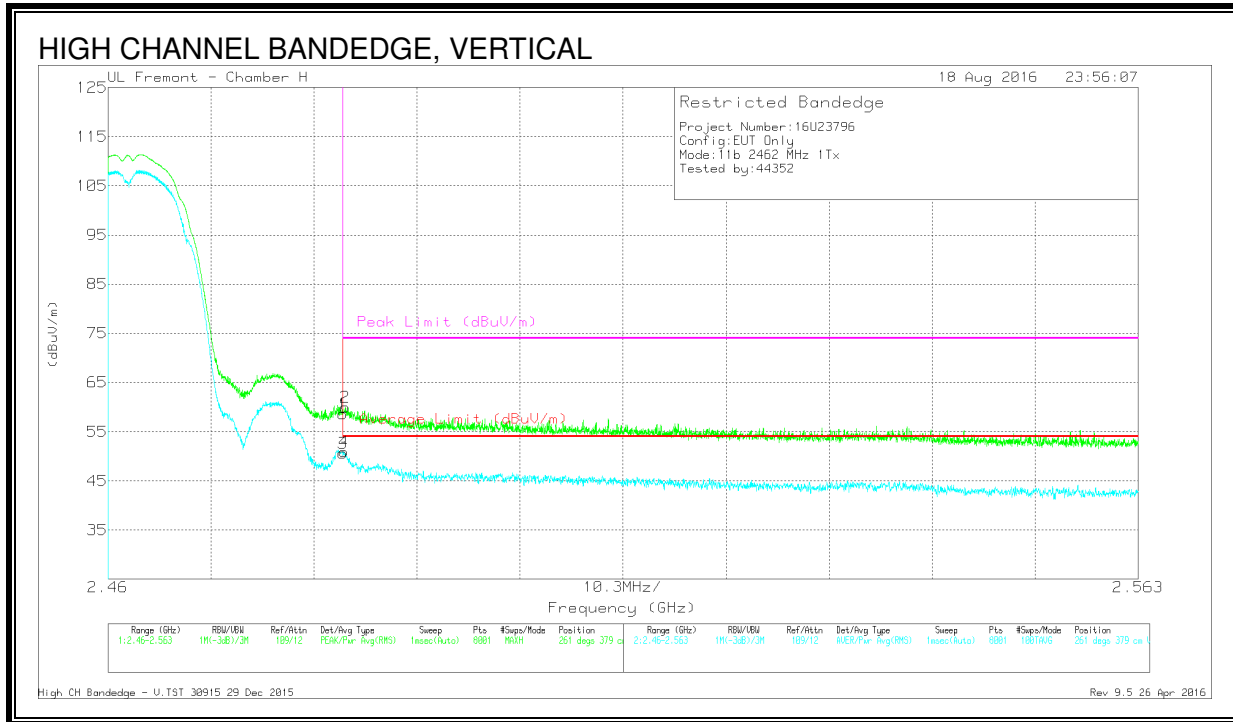

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Chl/Filtr/Path (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.9	Pk	32.2	-19.5	58.6	-	-	74	-15.4	261	379	V
2	* 2.484	47.31	Pk	32.2	-19.5	60.01	-	-	74	-13.99	261	379	V
3	* 2.484	37.91	RMS	32.2	-19.5	50.61	54	-3.39	-	-	261	379	V
4	* 2.484	38.25	RMS	32.2	-19.5	50.95	54	-3.05	-	-	261	379	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL, CH 12)

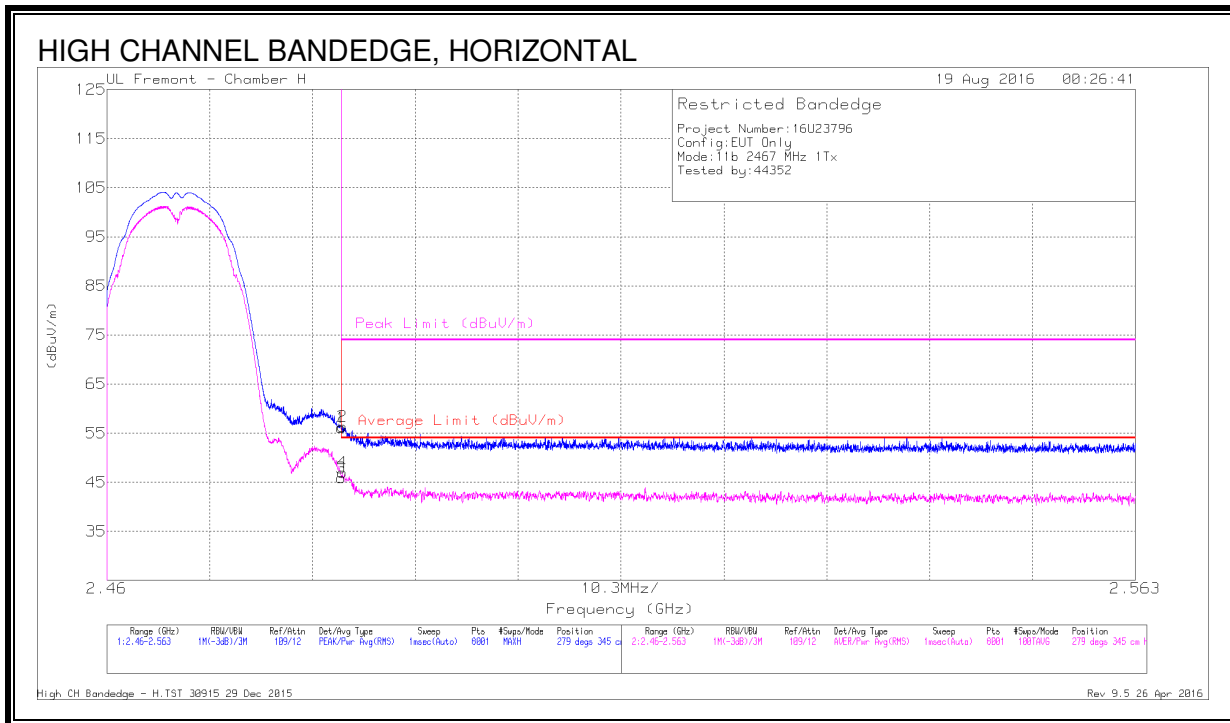


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.39	Pk	32.2	-19.5	56.09	-	-	74	-17.91	279	345	H
2	* 2.484	43.65	Pk	32.2	-19.5	56.35	-	-	74	-17.65	279	345	H
3	* 2.484	33.17	RMS	32.2	-19.5	45.87	54	-8.13	-	-	279	345	H
4	* 2.484	34.27	RMS	32.2	-19.5	46.97	54	-7.03	-	-	279	345	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

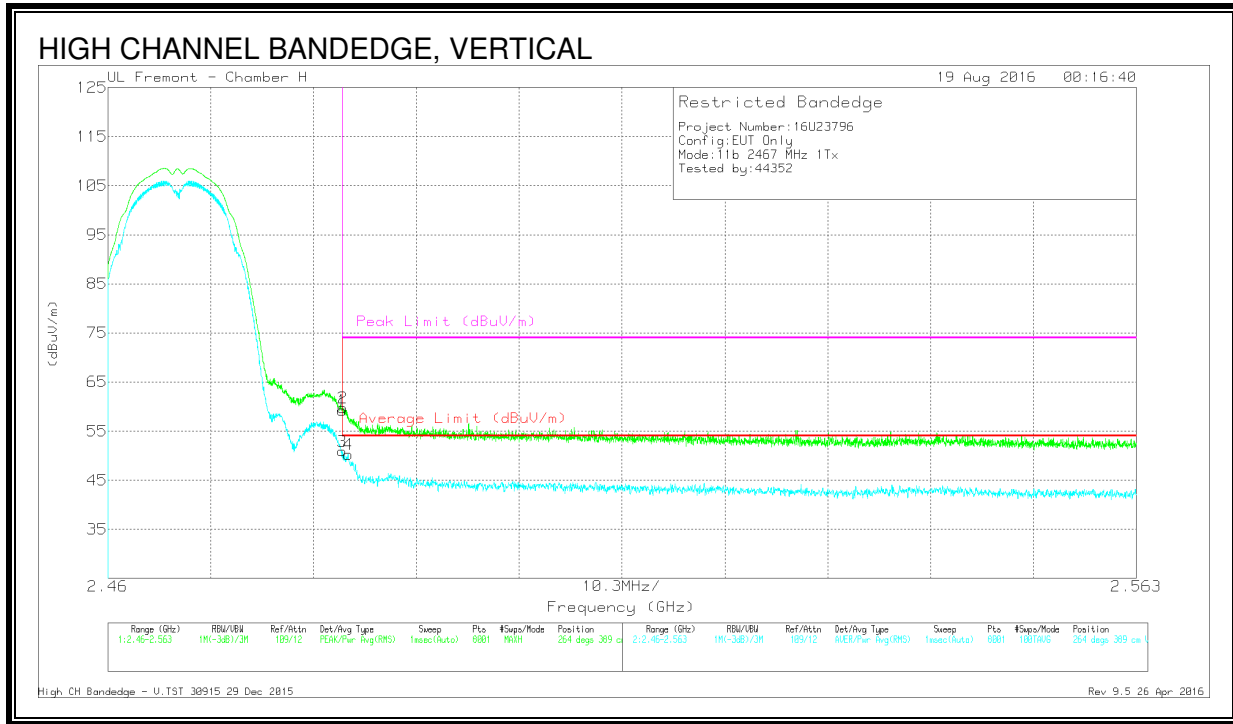

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Chl/Filtr/Path (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.61	Pk	32.2	-19.5	59.31	-	-	74	-14.69	264	389	V
2	* 2.484	47.1	Pk	32.2	-19.5	59.8	-	-	74	-14.2	264	389	V
3	* 2.484	38.25	RMS	32.2	-19.5	50.95	54	-3.05	-	-	264	389	V
4	* 2.484	37.52	RMS	32.2	-19.5	50.22	54	-3.78	-	-	264	389	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL, CH 13)

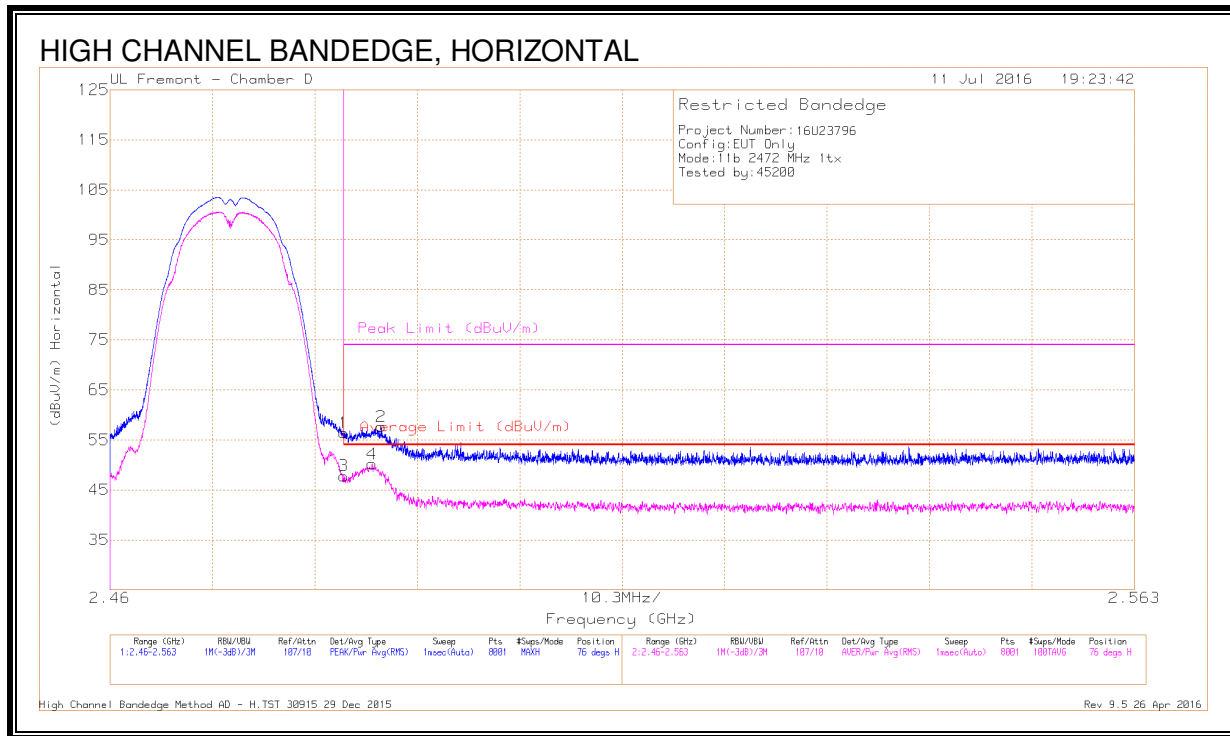


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.61	Pk	32.3	-20.5	56.41	-	-	74	-17.59	76	395	H
3	* 2.484	36.02	RMS	32.3	-20.5	47.82	54	-6.18	-	-	76	395	H
4	* 2.486	38.51	RMS	32.3	-20.6	50.21	54	-3.79	-	-	76	395	H
2	* 2.487	45.94	Pk	32.3	-20.6	57.64	-	-	74	-16.36	76	395	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


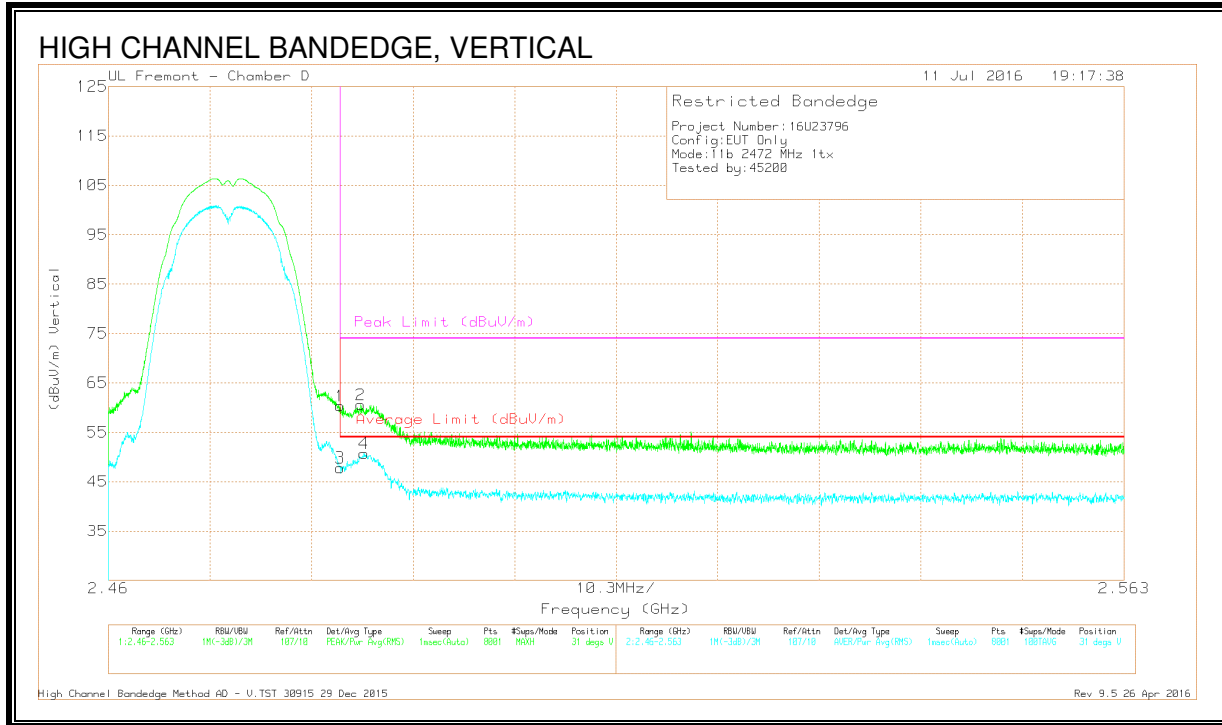


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.51	Pk	32.3	-20.5	60.31	-	-	74	-13.69	31	305	V
2	* 2.486	48.86	Pk	32.3	-20.6	60.56	-	-	74	-13.44	31	305	V
3	* 2.484	36	RMS	32.3	-20.5	47.8	54	-6.2	-	-	31	305	V
4	* 2.486	39.01	RMS	32.3	-20.6	50.71	54	-3.29	-	-	31	305	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 1)

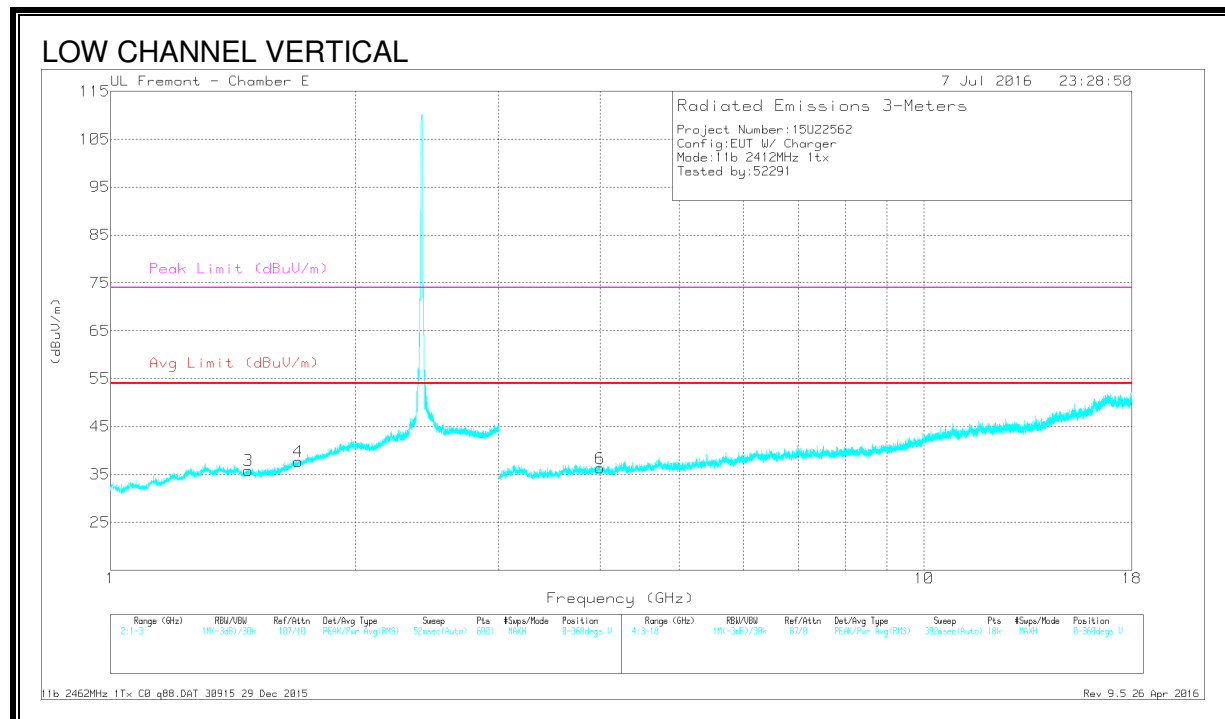
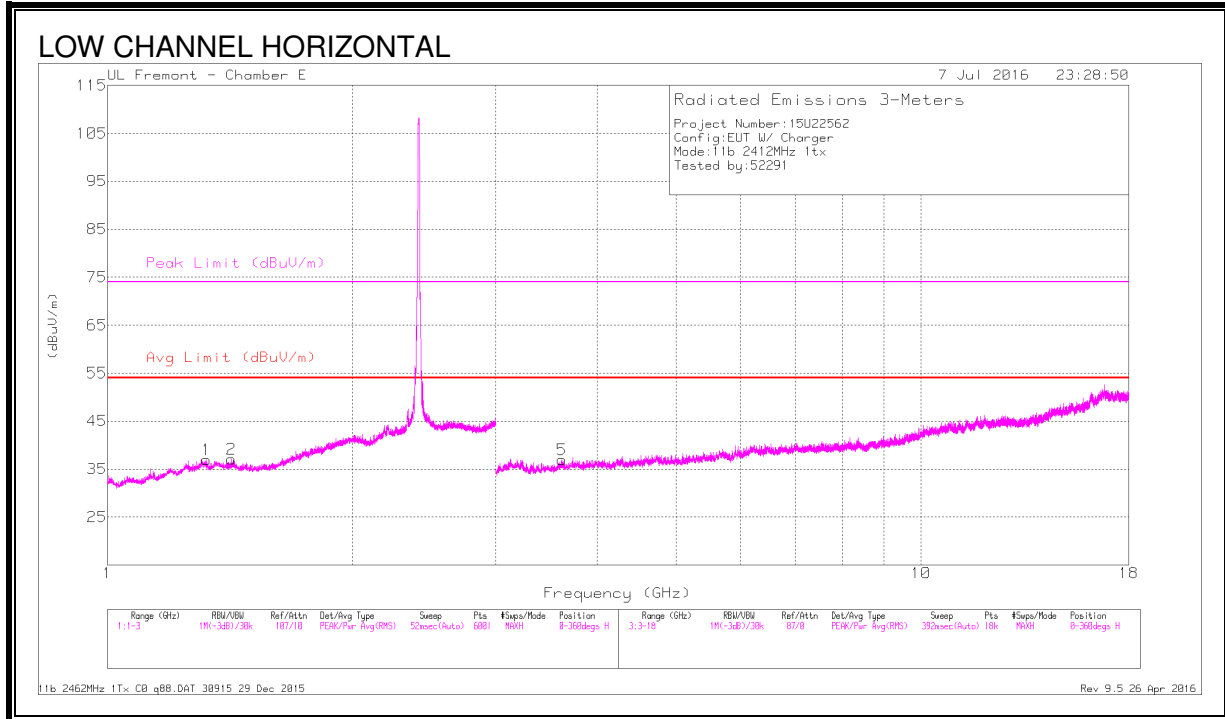


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.323	36.51	PK2	29.3	-22.3	43.51	-	-	74	-30.49	4	160	H
	* 1.323	24.81	MAv1	29.3	-22.3	31.81	54	-22.19	-	-	4	160	H
2	* 1.419	37.04	PK2	28.8	-22	43.84	-	-	74	-30.16	96	121	H
	* 1.421	25.67	MAv1	28.8	-22	32.47	54	-21.53	-	-	96	121	H
3	* 1.479	36.58	PK2	28	-21.5	43.08	-	-	74	-30.92	98	101	V
	* 1.479	25.13	MAv1	28	-21.5	31.63	54	-22.37	-	-	98	101	V
4	* 1.702	36.01	PK2	29.2	-21	44.21	-	-	74	-29.79	168	210	V
	* 1.702	25.55	MAv1	29.2	-21	33.75	54	-20.25	-	-	168	210	V
5	* 3.615	40.28	PK2	33	-30.5	42.78	-	-	74	-31.22	143	241	H
	* 3.616	30.38	MAv1	33	-30.5	32.88	54	-21.12	-	-	143	241	H
6	* 3.996	40.72	PK2	33.1	-29.8	44.02	-	-	74	-29.98	187	164	V
	* 3.996	29.77	MAv1	33.1	-29.8	33.07	54	-20.93	-	-	187	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 6)

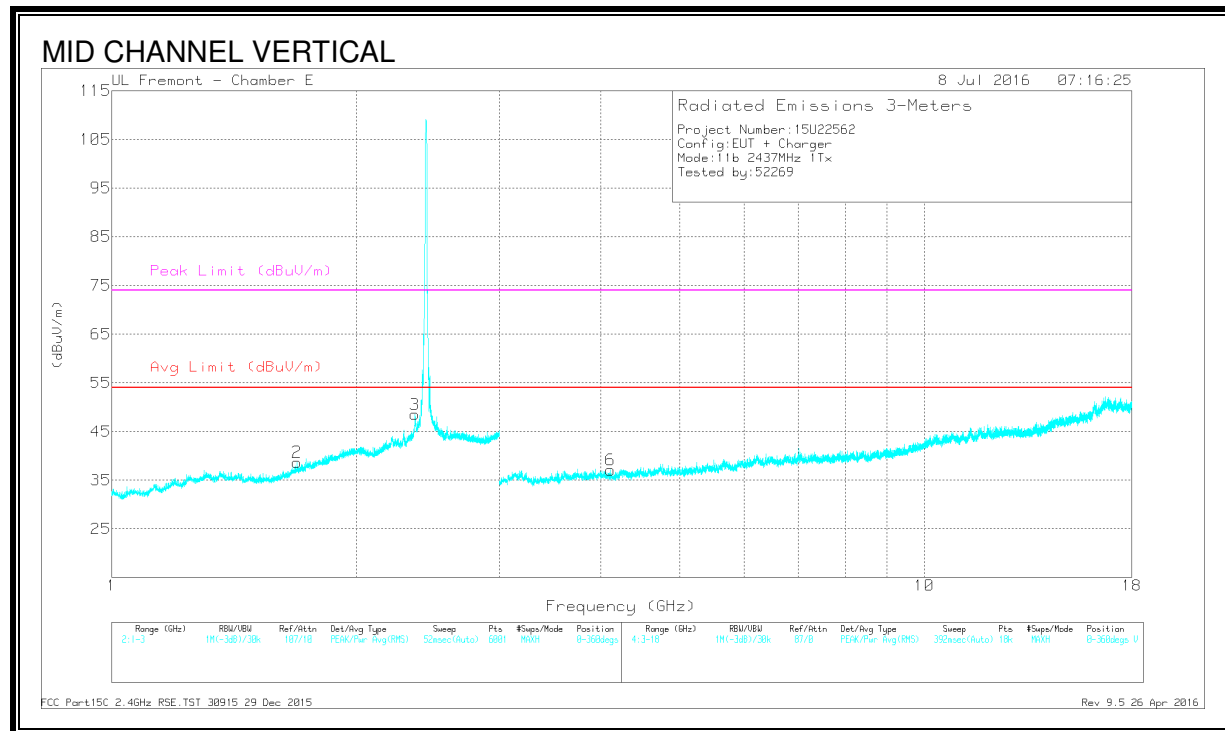
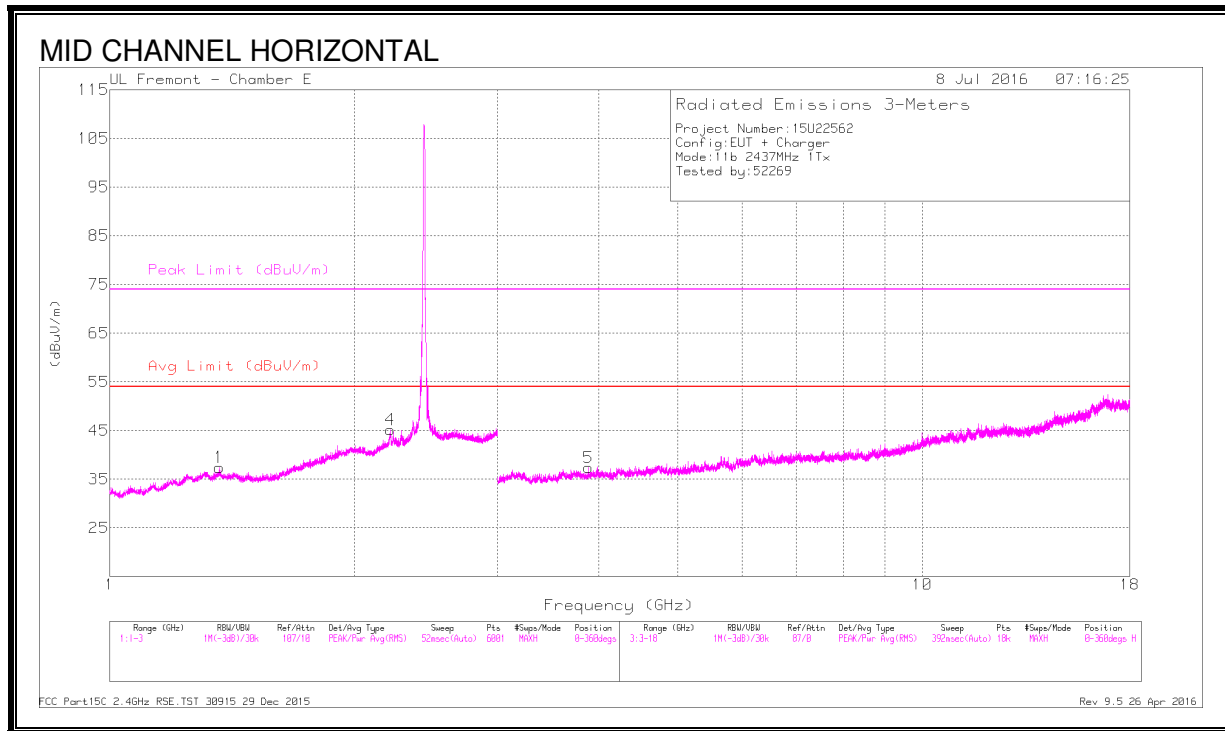


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.366	37.02	PK2	29.2	-22.2	44.02	-	-	74	-29.98	89	265	H
	* 1.365	22.47	MAv1	29.2	-22.1	29.57	54	-24.43	-	-	89	265	H
2	* 2.213	40.57	PK2	31.8	-20.1	52.27	-	-	74	-21.73	93	112	H
	* 2.214	30.72	MAv1	31.8	-20.1	42.42	54	-11.58	-	-	93	112	H
3	* 1.689	36.7	PK2	29	-21.1	44.6	-	-	74	-29.4	111	315	V
	* 1.688	24.82	MAv1	29	-21.1	32.72	54	-21.28	-	-	111	315	V
4	* 2.363	45.34	PK2	31.9	-20	57.24	-	-	74	-16.76	149	318	V
	* 2.361	35.15	MAv1	31.9	-20	47.05	54	-6.95	-	-	149	318	V
5	* 3.885	40.35	PK2	33.3	-30.6	43.05	-	-	74	-30.95	56	235	H
	* 3.885	29.75	MAv1	33.3	-30.6	32.45	54	-21.55	-	-	56	235	H
6	* 4.113	40.02	PK2	33.4	-30.8	42.62	-	-	74	-31.38	13	347	V
	* 4.11	29.81	MAv1	33.4	-30.8	32.41	54	-21.59	-	-	13	347	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 11)

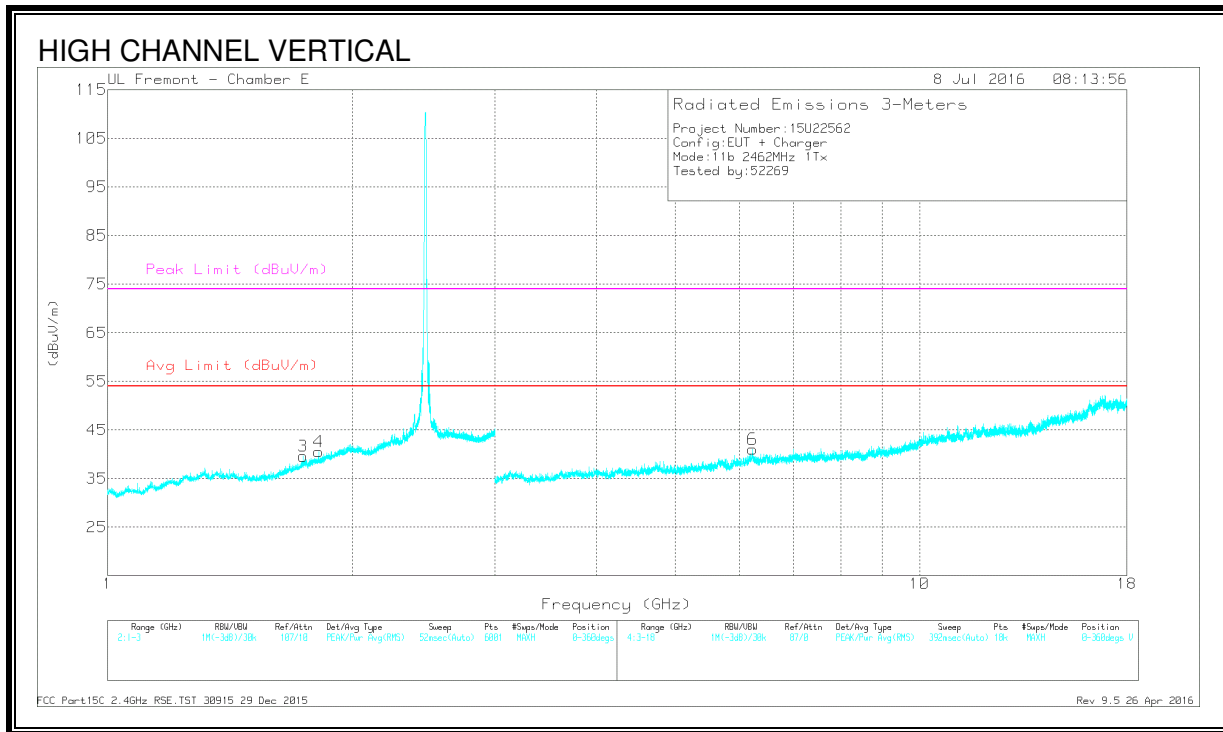
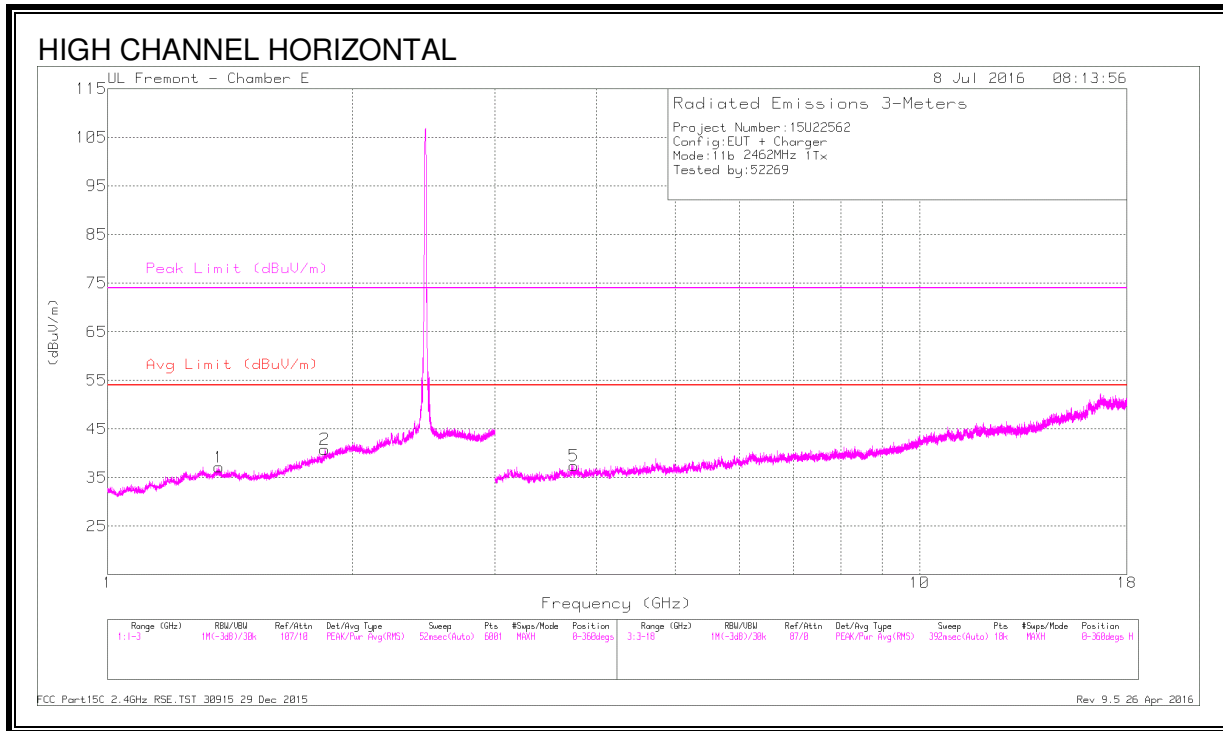


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.37	36.26	PK2	29.1	-22.2	43.16	-	-	74	-30.84	353	227	H
	* 1.37	24.88	MAv1	29.1	-22.2	31.78	54	-22.22	-	-	353	227	H
5	* 3.749	39.59	PK2	33.1	-30.1	42.59	-	-	74	-31.41	19	400	H
	* 3.75	29.06	MAv1	33.1	-30.1	32.06	54	-21.94	-	-	19	400	H
3	1.743	36.9	PK2	29.7	-20.8	45.8	-	-	-	-	28	334	V
4	1.818	36.43	PK2	30.6	-20.9	46.13	-	-	-	-	275	341	V
2	1.852	36.92	PK2	30.9	-20.9	46.92	-	-	-	-	288	102	H
6	6.227	39.23	PK2	35.6	-27.3	47.53	-	-	-	-	269	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 12)

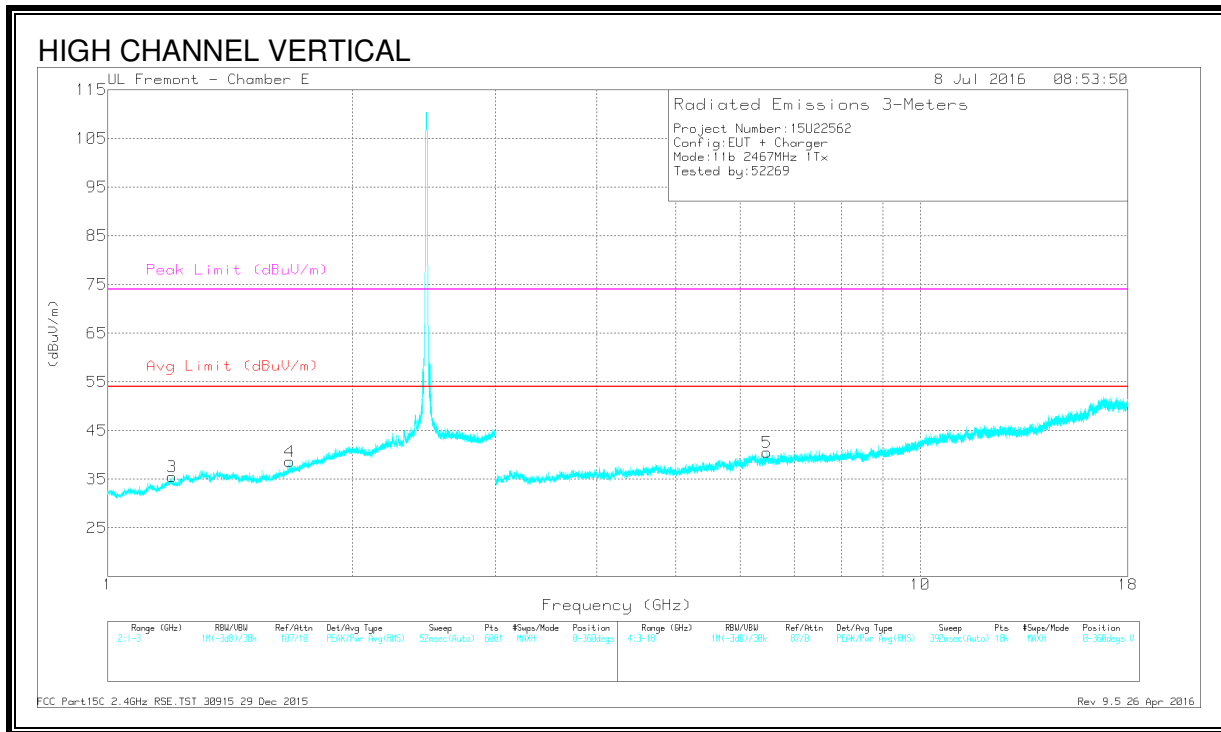
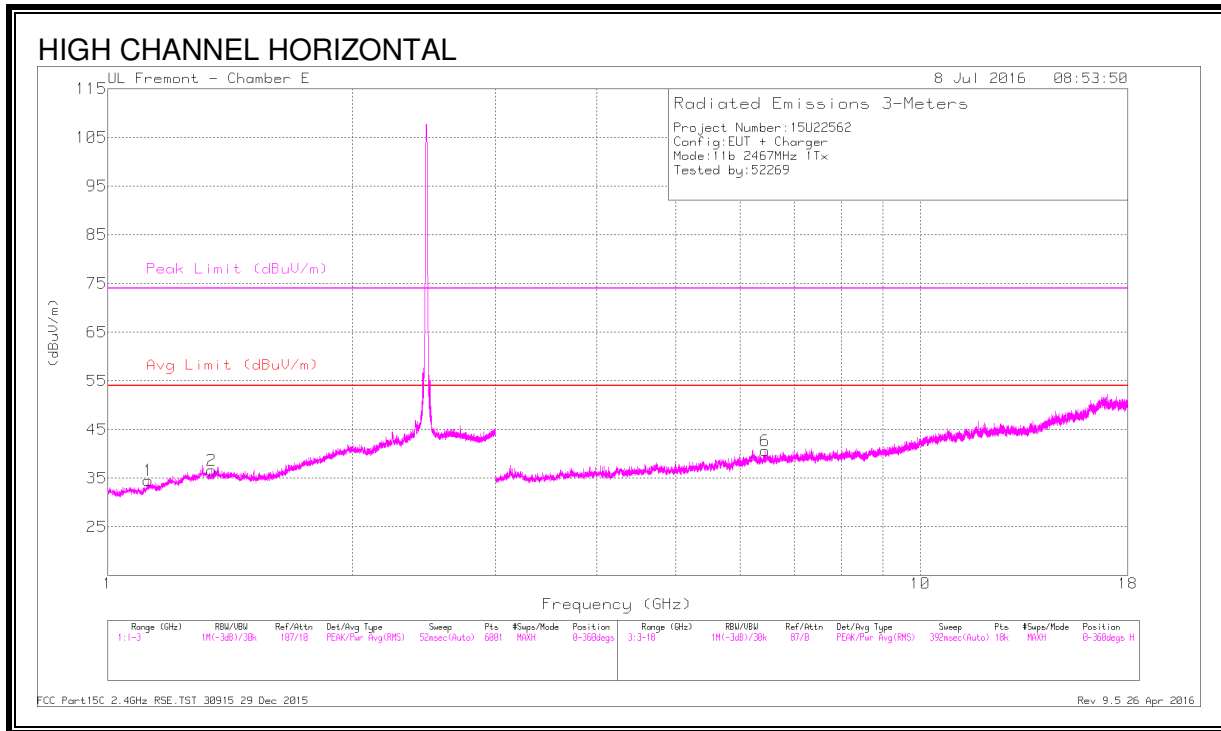


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.122	36.35	PK2	27.9	-23.4	40.85	-	-	74	-33.15	4	339	H
	* 1.123	25.23	MAv1	27.9	-23.4	29.73	54	-24.27	-	-	4	339	H
2	* 1.341	35.2	PK2	29.2	-22.4	42	-	-	74	-32	137	229	H
	* 1.342	24.52	MAv1	29.2	-22.4	31.32	54	-22.68	-	-	137	229	H
3	* 1.198	37.94	PK2	28.5	-23	43.44	-	-	74	-30.56	360	332	V
	* 1.199	24.98	MAv1	28.5	-22.9	30.58	54	-23.42	-	-	360	332	V
4	* 1.675	36.29	PK2	28.8	-21.1	43.99	-	-	74	-30.01	95	328	V
	* 1.676	25.1	MAv1	28.8	-21.1	32.8	54	-21.2	-	-	95	328	V
6	6.44	38.23	PK2	35.5	-28	45.73	-	-	-	-	143	198	H
5	6.471	38.16	PK2	35.5	-27.4	46.26	-	-	-	-	298	219	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 13)

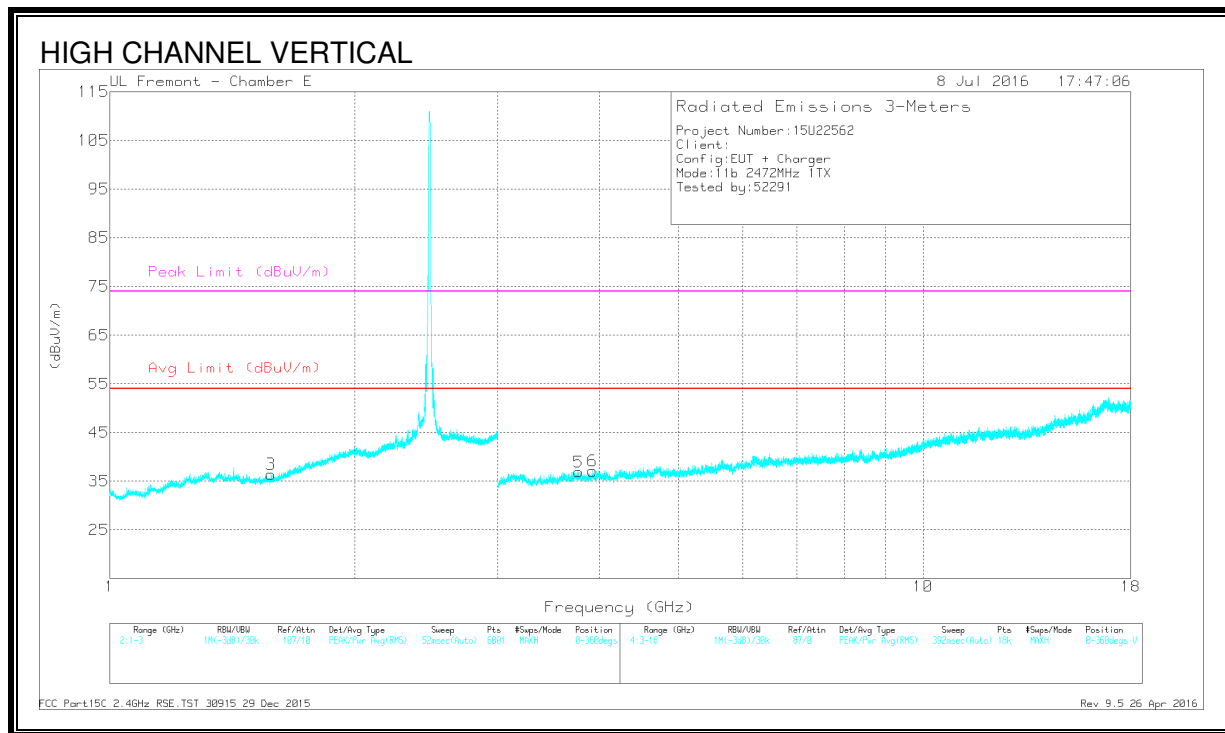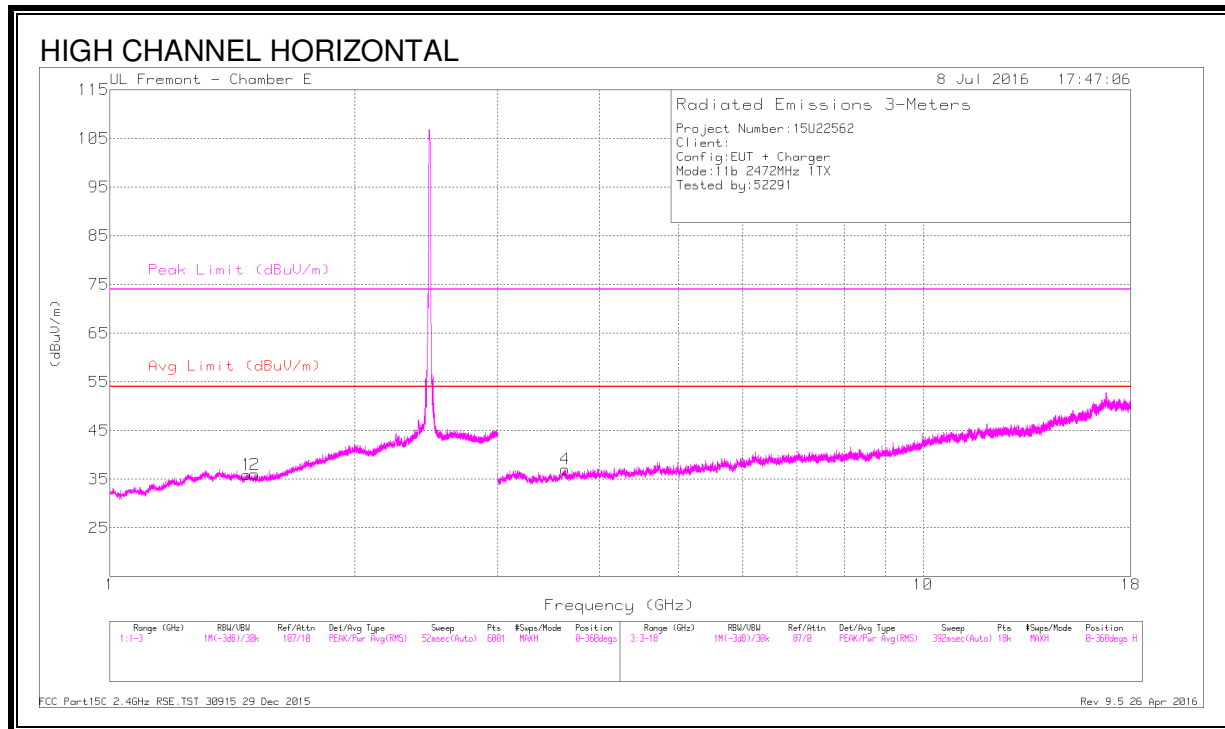


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.473	35.89	PK2	28.1	-21.6	42.39	-	-	74	-31.61	220	282	H
	* 1.473	25.03	MAv1	28.1	-21.6	31.53	54	-22.47	-	-	220	282	H
2	* 1.509	36.28	PK2	27.7	-21.5	42.48	-	-	74	-31.52	273	201	H
	* 1.506	24.82	MAv1	27.7	-21.5	31.02	54	-22.98	-	-	273	201	H
3	* 1.577	36.8	PK2	27.8	-21.6	43	-	-	74	-31	286	182	V
	* 1.577	24.97	MAv1	27.8	-21.6	31.17	54	-22.83	-	-	286	182	V
4	* 3.63	40.6	PK2	33	-30.4	43.2	-	-	74	-30.8	360	141	H
	* 3.629	29.64	MAv1	33	-30.4	32.24	54	-21.76	-	-	360	141	H
5	* 3.77	40.77	PK2	33.1	-30.2	43.67	-	-	74	-30.33	193	277	V
	* 3.77	29.63	MAv1	33.1	-30.2	32.53	54	-21.47	-	-	193	277	V
6	* 3.924	39.5	PK2	33.3	-29.8	43	-	-	74	-31	317	165	V
	* 3.922	29.34	MAv1	33.3	-29.8	32.84	54	-21.16	-	-	317	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

9.4. 802.11b 2Tx MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL, CH 1)

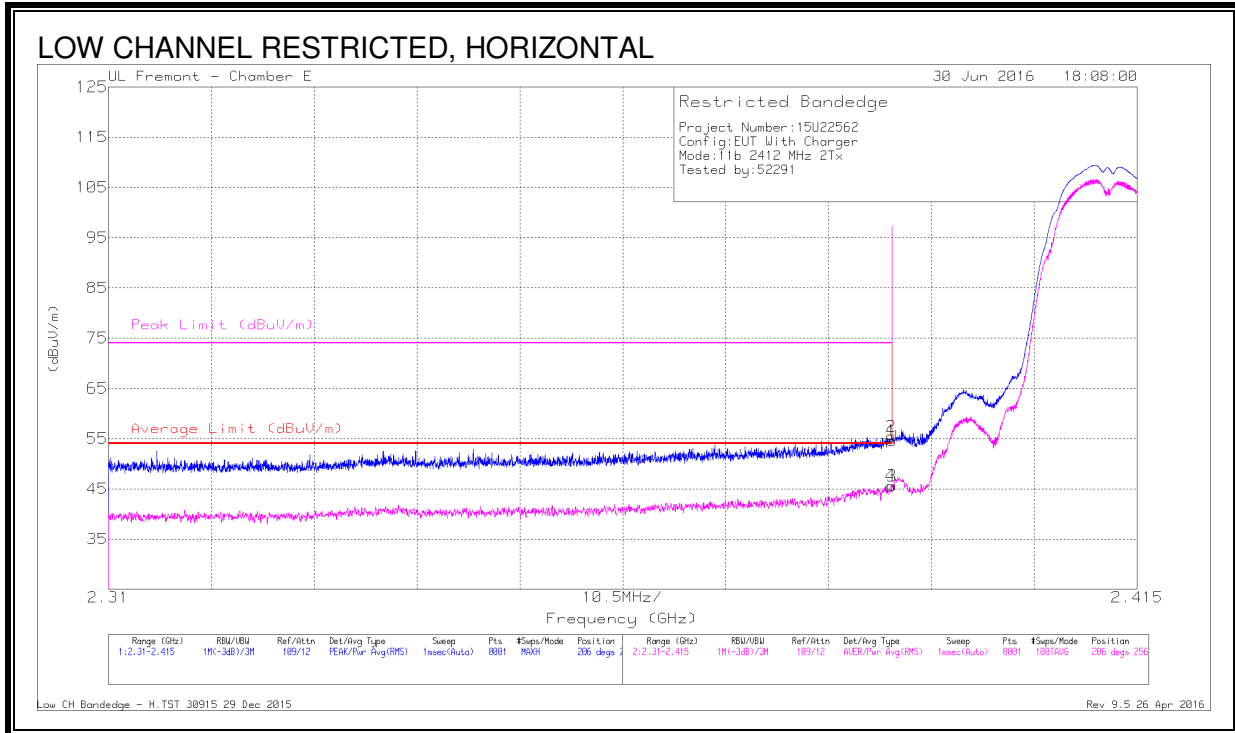


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.37	Pk	32.1	-19.9	54.57	-	-	74	-19.43	206	256	H
2	* 2.39	43.27	Pk	32.1	-19.9	55.47	-	-	74	-18.53	206	256	H
3	* 2.39	33.39	RMS	32.1	-19.9	45.59	54	-8.41	-	-	206	256	H
4	* 2.39	33.4	RMS	32.1	-19.9	45.6	54	-8.4	-	-	206	256	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

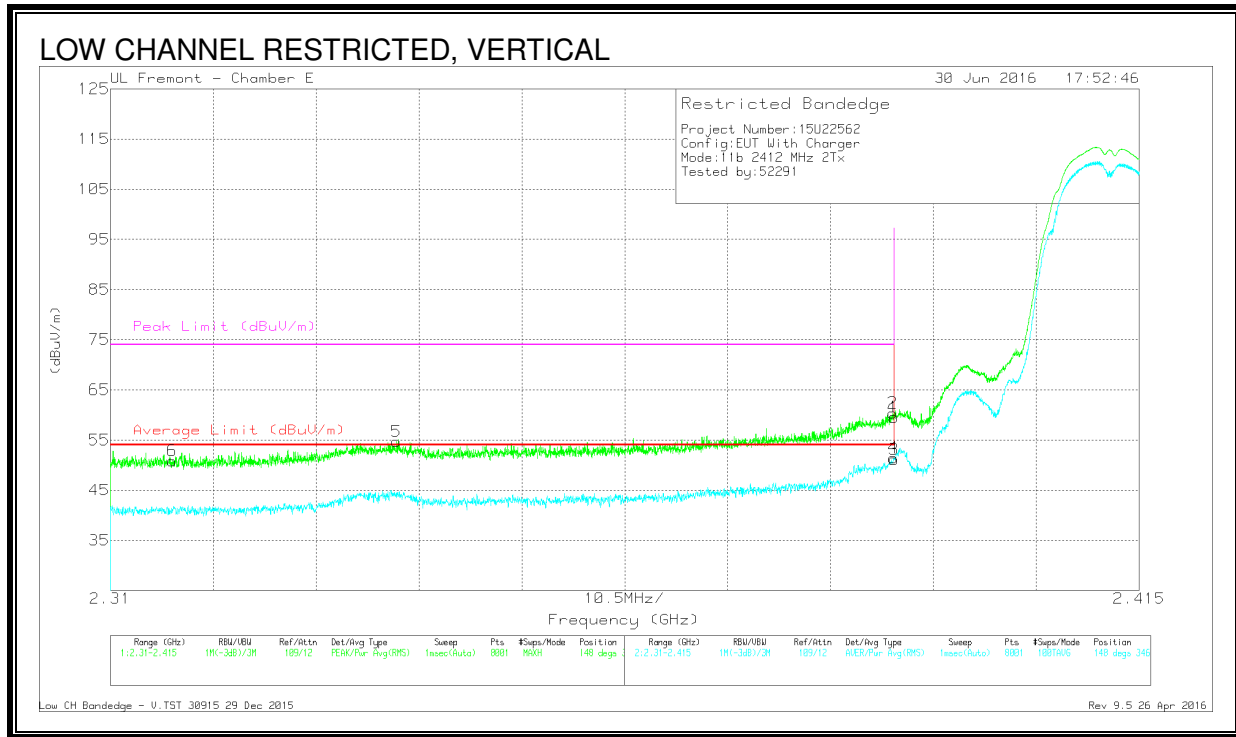


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 2.316	39.38	Pk	31.6	-20.1	50.88	-	-	74	-23.12	148	346	V
5	* 2.339	43.2	Pk	31.7	-20.2	54.7	-	-	74	-19.3	148	346	V
1	* 2.39	47.37	Pk	32.1	-19.9	59.57	-	-	74	-14.43	148	346	V
2	* 2.39	48.18	Pk	32.1	-19.9	60.38	-	-	74	-13.62	148	346	V
3	* 2.39	38.93	RMS	32.1	-19.9	51.13	54	-2.87	-	-	148	346	V
4	* 2.39	39.27	RMS	32.1	-19.9	51.47	54	-2.53	-	-	148	346	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection


RESTRICTED BANDEGE (HIGH CHANNEL, CH 11)

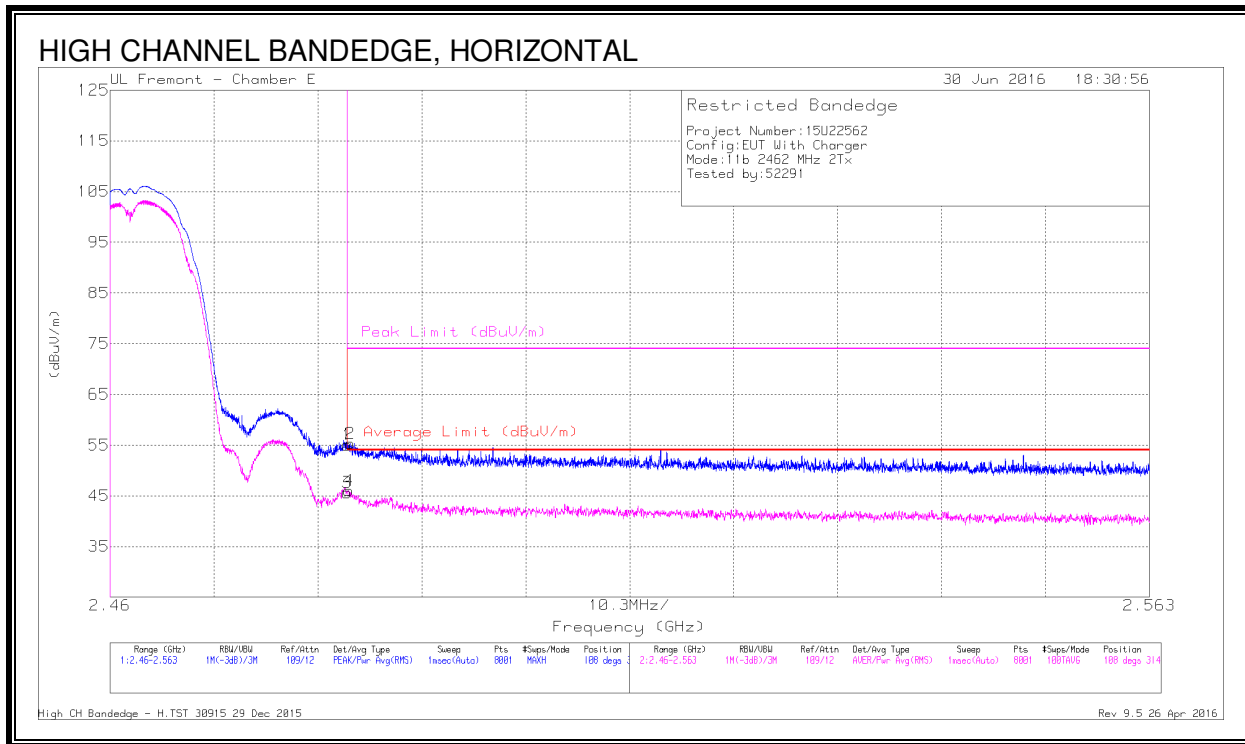

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.74	Pk	32.3	-20	55.04	-	-	74	-18.96	108	314	H
2	* 2.484	43.02	Pk	32.3	-20	55.32	-	-	74	-18.68	108	314	H
3	* 2.484	33.34	RMS	32.3	-20	45.64	54	-8.36	-	-	108	314	H
4	* 2.484	33.75	RMS	32.3	-20	46.05	54	-7.95	-	-	108	314	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

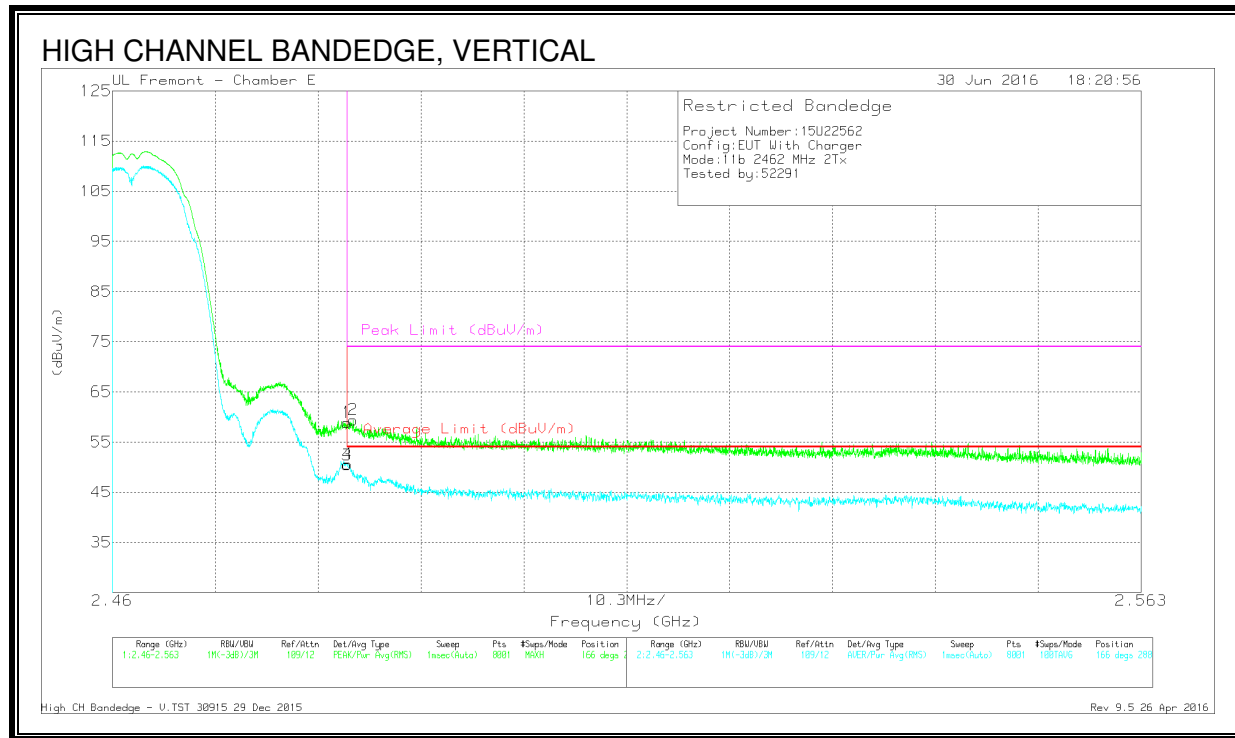


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.61	Pk	32.3	-20	58.91	-	-	74	-15.09	166	288	V
2	* 2.484	47.13	Pk	32.3	-20	59.43	-	-	74	-14.57	166	288	V
3	* 2.484	38.14	RMS	32.3	-20	50.44	54	-3.56	-	-	166	288	V
4	* 2.484	38.29	RMS	32.3	-20	50.59	54	-3.41	-	-	166	288	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection


RESTRICTED BANDEGE (HIGH CHANNEL, CH 12)

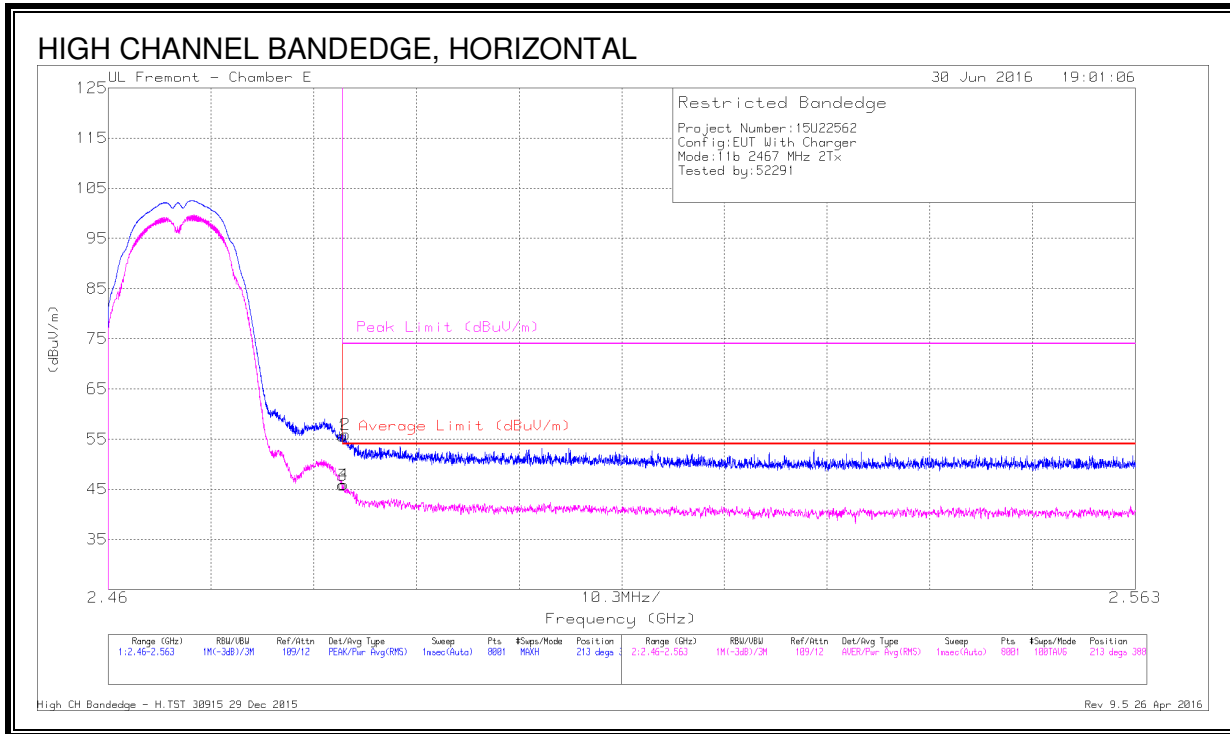

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.3	Pk	32.3	-20	55.6	-	-	74	-18.4	213	388	H
2	* 2.484	43.62	Pk	32.3	-20	55.92	-	-	74	-18.08	213	388	H
3	* 2.484	33.48	RMS	32.3	-20	45.78	54	-8.22	-	-	213	388	H
4	* 2.484	33.61	RMS	32.3	-20	45.91	54	-8.09	-	-	213	388	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

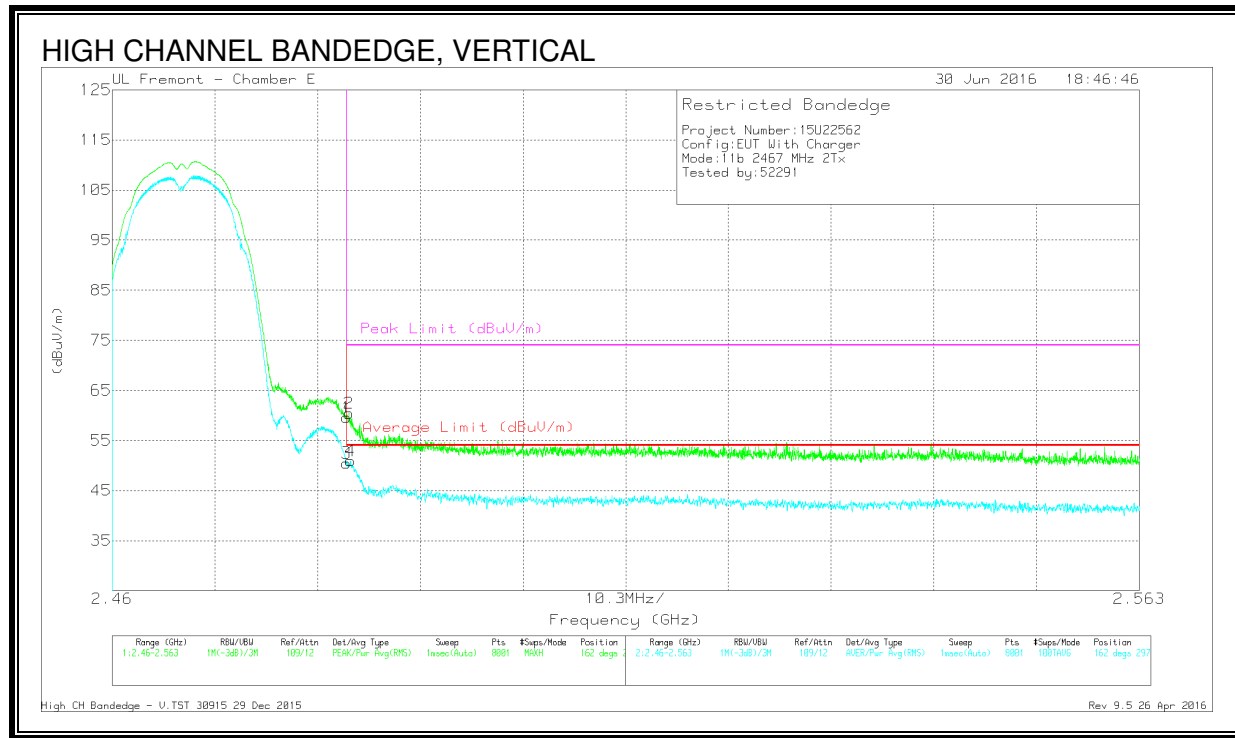

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.32	Pk	32.3	-20	59.62	-	-	74	-14.38	162	297	V
2	* 2.484	48.12	Pk	32.3	-20	60.42	-	-	74	-13.58	162	297	V
3	* 2.484	38.19	RMS	32.3	-20	50.49	54	-3.51	-	-	162	297	V
4	* 2.484	38.64	RMS	32.3	-20	50.94	54	-3.06	-	-	162	297	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE (HIGH CHANNEL, CH 13)

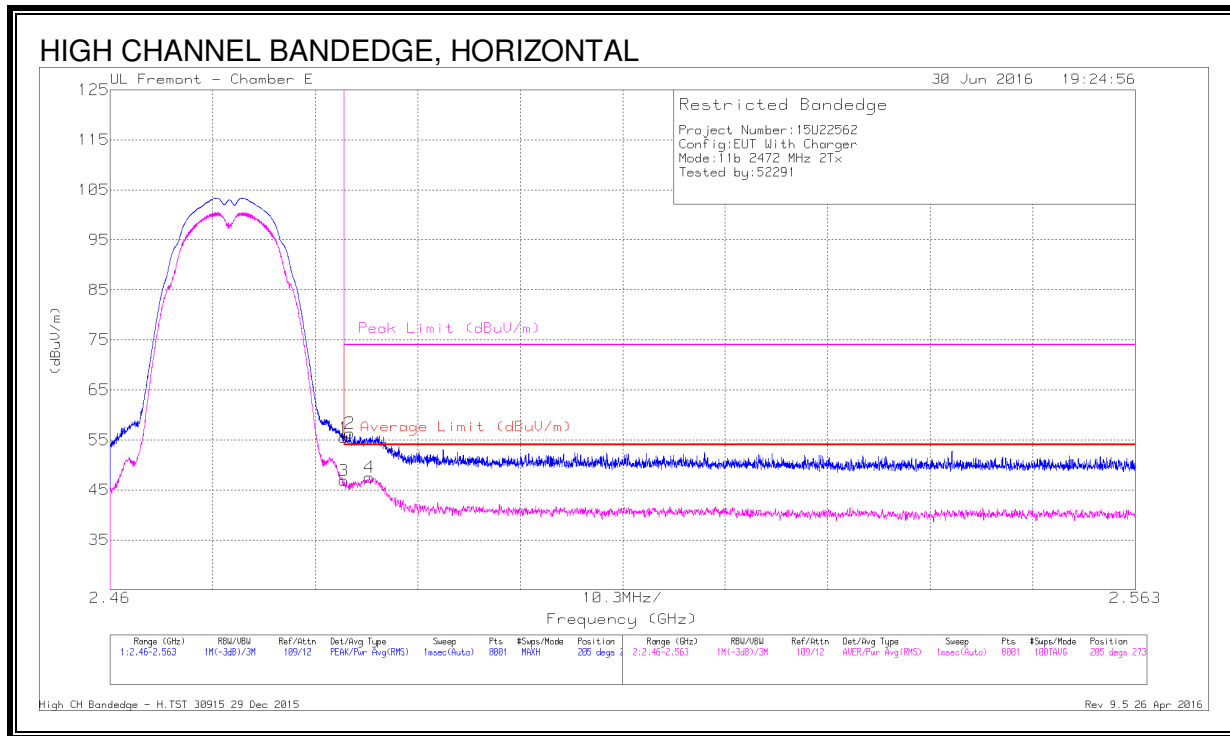


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.13	Pk	32.3	-20	55.43	-	-	74	-18.57	205	273	H
2	* 2.484	44.04	Pk	32.3	-20	56.34	-	-	74	-17.66	205	273	H
3	* 2.484	34.58	RMS	32.3	-20	46.88	54	-7.12	-	-	205	273	H
4	* 2.486	35.34	RMS	32.3	-20.1	47.54	54	-6.46	-	-	205	273	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

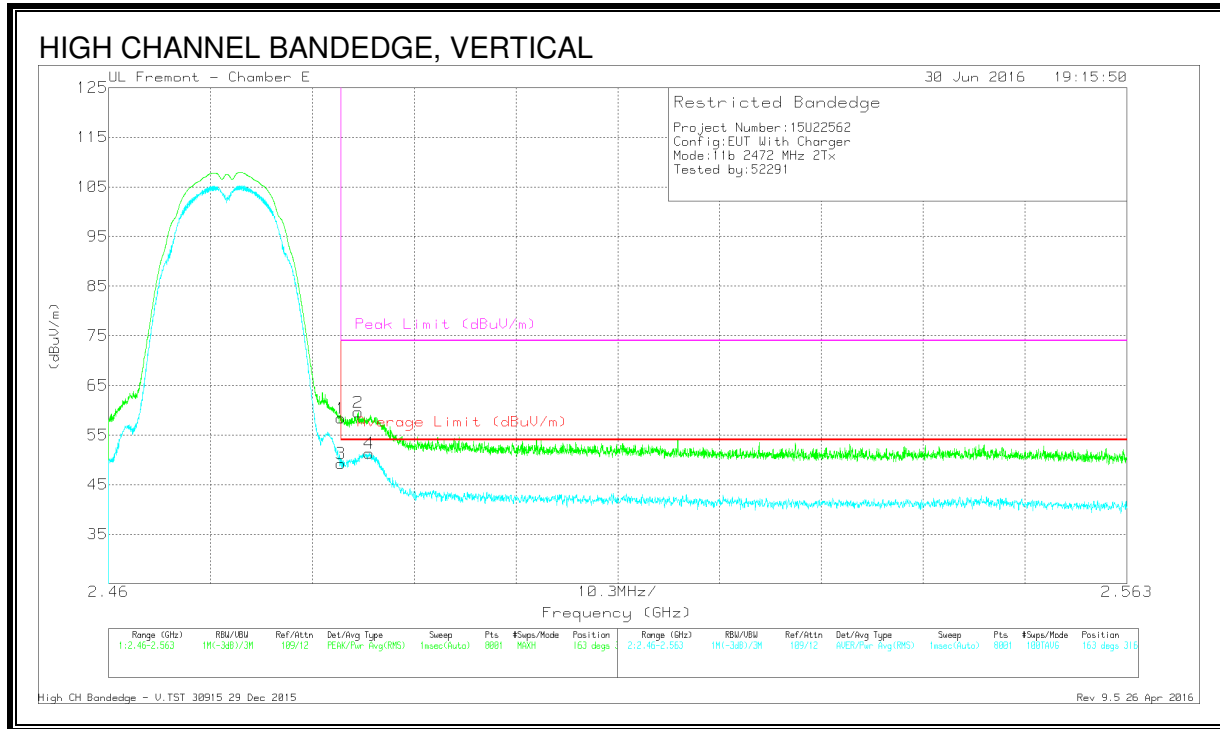

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1711 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.08	Pk	32.3	-20	58.38	-	-	74	-15.62	163	316	V
3	* 2.484	36.97	RMS	32.3	-20	49.27	54	-4.73	-	-	163	316	V
2	* 2.485	47.42	Pk	32.3	-20.1	59.62	-	-	74	-14.38	163	316	V
4	* 2.486	39.13	RMS	32.3	-20.1	51.33	54	-2.67	-	-	163	316	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 1)

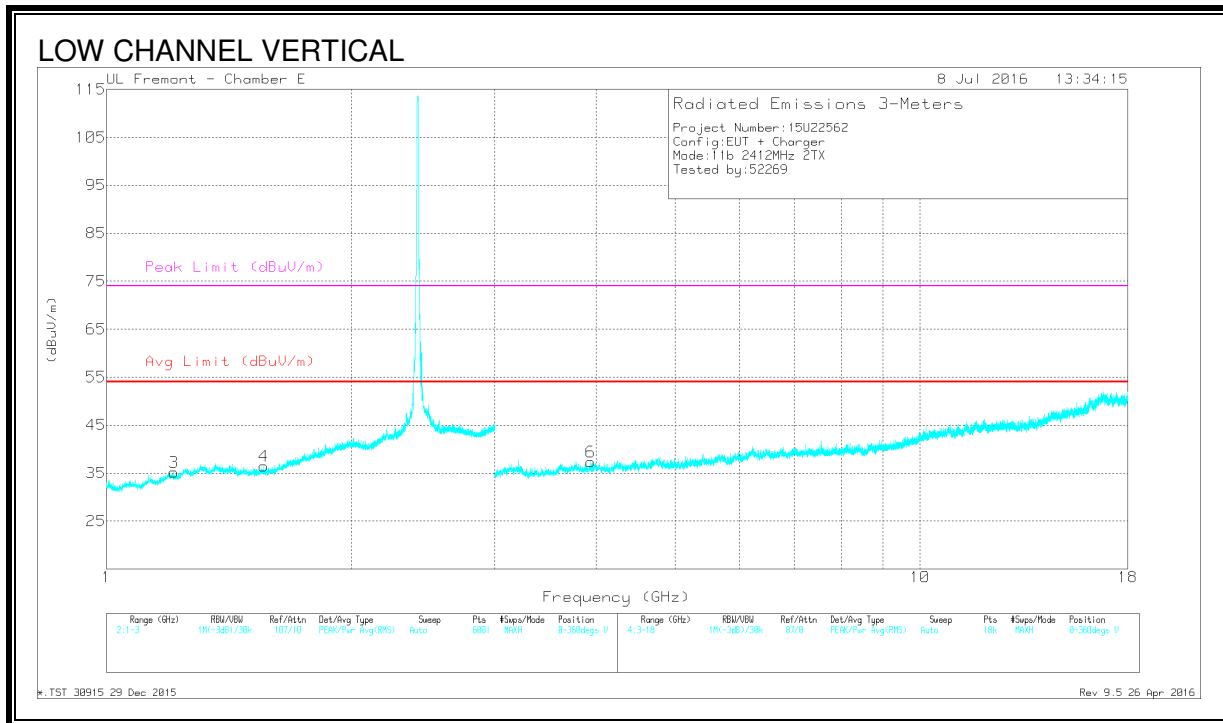
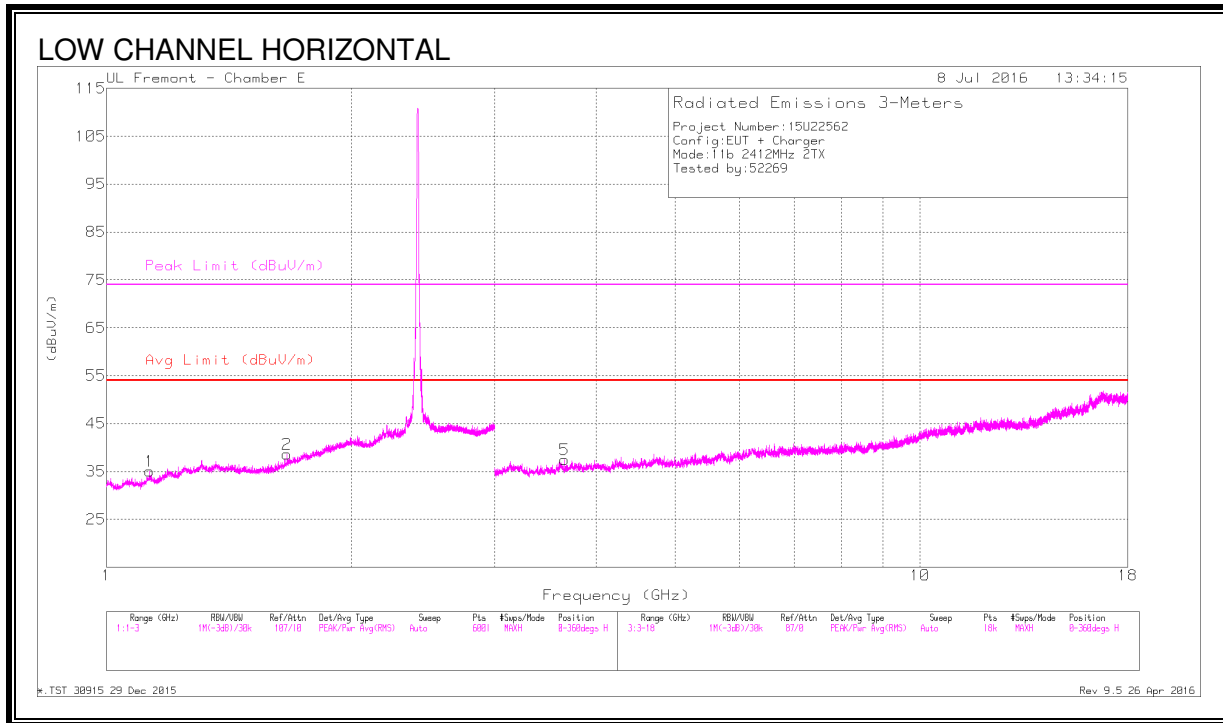


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.128	36.58	PK2	27.9	-23.3	41.18	-	-	74	-32.82	52	256	H
	* 1.129	25.31	MAv1	27.9	-23.3	29.91	54	-24.09	-	-	52	256	H
2	* 1.665	36.41	PK2	28.7	-21.2	43.91	-	-	74	-30.09	7	224	H
	* 1.667	25.08	MAv1	28.7	-21.1	32.68	54	-21.32	-	-	7	224	H
3	* 1.209	36.01	PK2	28.6	-22.9	41.71	-	-	74	-32.29	176	111	V
	* 1.211	24.65	MAv1	28.6	-22.9	30.35	54	-23.65	-	-	176	111	V
4	* 1.56	37.18	PK2	27.8	-21.4	43.58	-	-	74	-30.42	321	241	V
	* 1.562	25.09	MAv1	27.8	-21.5	31.39	54	-22.61	-	-	321	241	V
5	* 3.654	40.33	PK2	33.1	-30.5	42.93	-	-	74	-31.07	0	168	H
	* 3.656	29.37	MAv1	33.1	-30.5	31.97	54	-22.03	-	-	0	168	H
6	* 3.936	39.74	PK2	33.3	-29.6	43.44	-	-	74	-30.56	122	322	V
	* 3.935	28.68	MAv1	33.3	-29.6	32.38	54	-21.62	-	-	122	322	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 6)

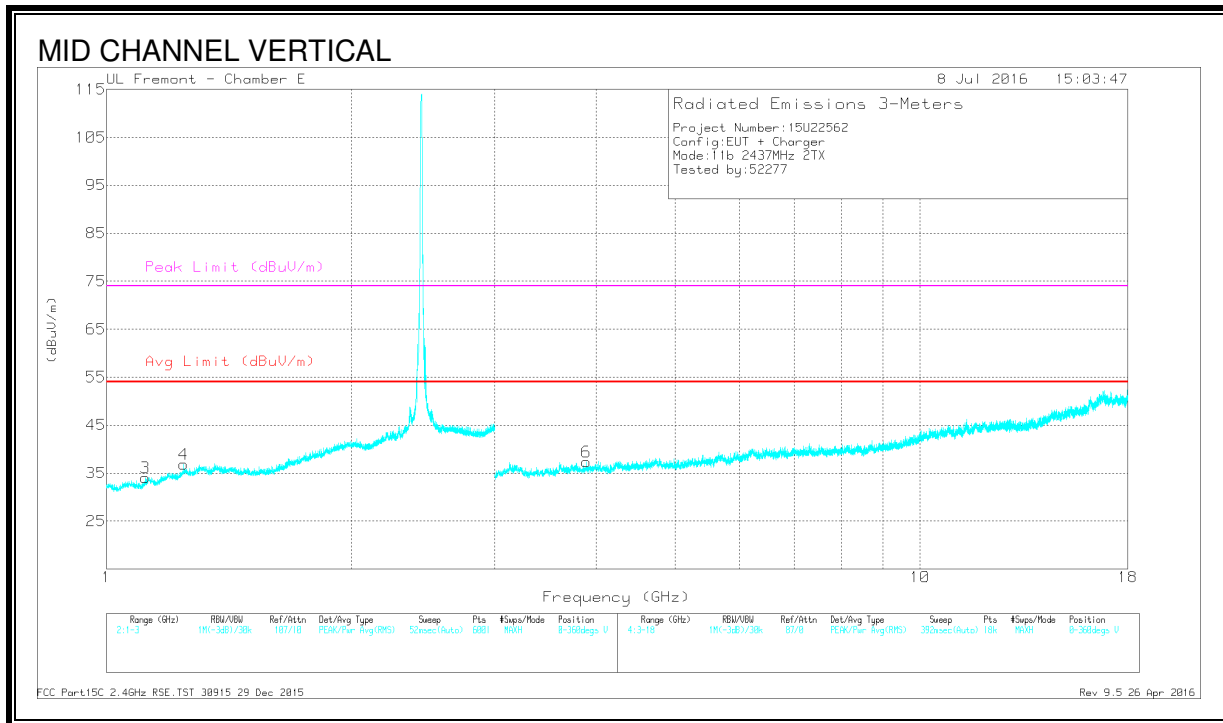
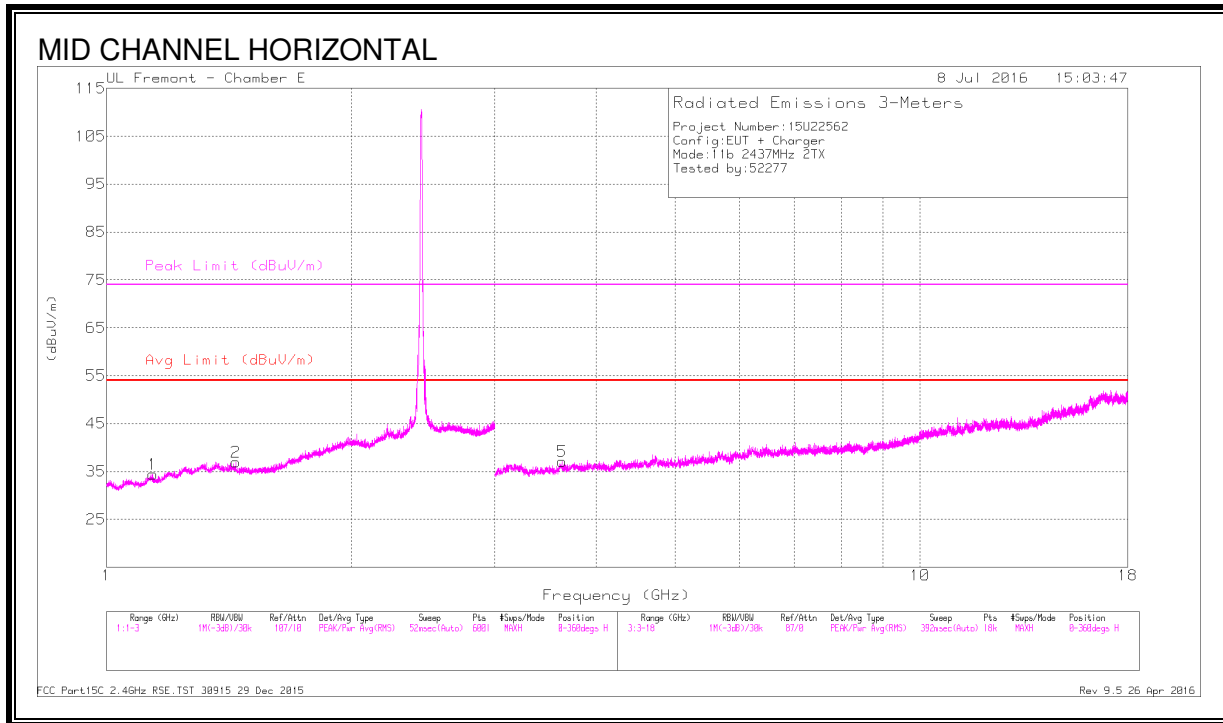


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.14	36.44	PK2	28	-23.5	40.94	-	-	74	-33.06	27	177	H
	* 1.14	25.17	MAv1	28	-23.5	29.67	54	-24.33	-	-	27	177	H
2	* 1.439	35.93	PK2	28.5	-21.7	42.73	-	-	74	-31.27	166	260	H
	* 1.44	24.96	MAv1	28.5	-21.7	31.76	54	-22.24	-	-	166	260	H
3	* 1.117	36.72	PK2	27.8	-23.6	40.92	-	-	74	-33.08	162	283	V
	* 1.114	24.91	MAv1	27.8	-23.6	29.11	54	-24.89	-	-	162	283	V
4	* 1.245	36.28	PK2	28.9	-22.5	42.68	-	-	74	-31.32	135	145	V
	* 1.243	25.2	MAv1	28.9	-22.5	31.6	54	-22.4	-	-	135	145	V
5	* 3.631	40.27	PK2	33	-30.4	42.87	-	-	74	-31.13	38	132	H
	* 3.63	29.48	MAv1	33	-30.4	32.08	54	-21.92	-	-	38	132	H
6	* 3.89	40.68	PK2	33.3	-30.5	43.48	-	-	74	-30.52	262	192	V
	* 3.891	29.87	MAv1	33.3	-30.5	32.67	54	-21.33	-	-	262	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 11)

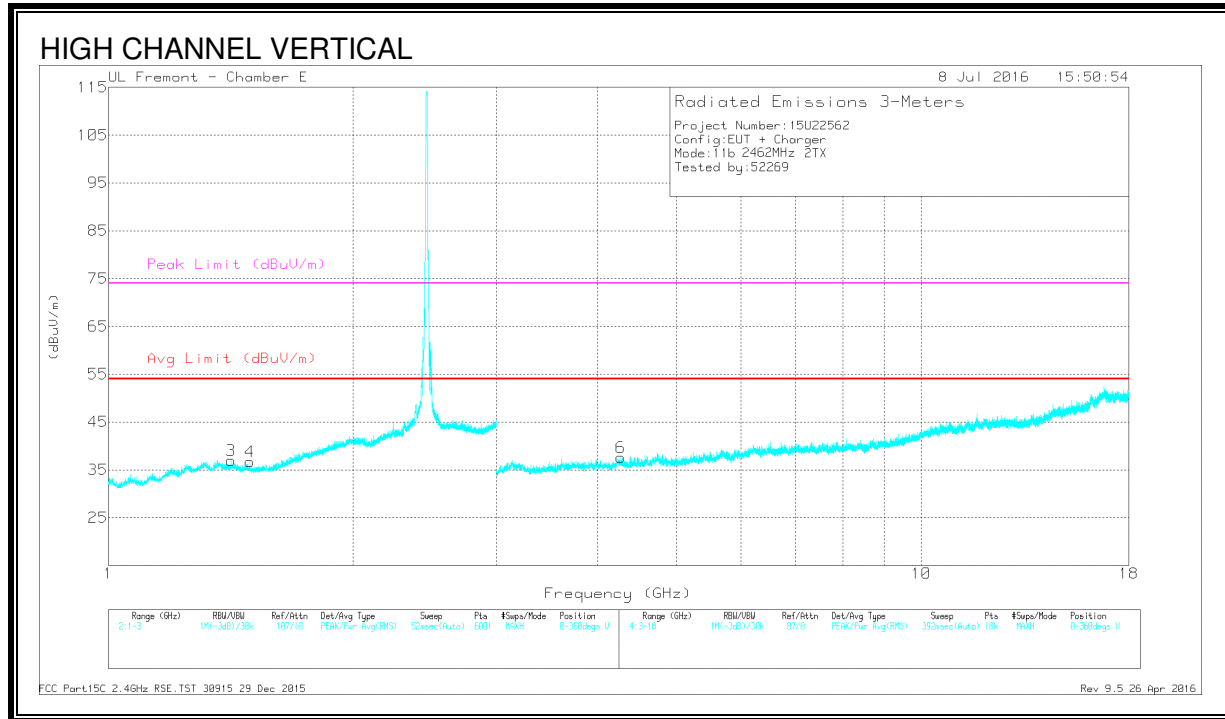
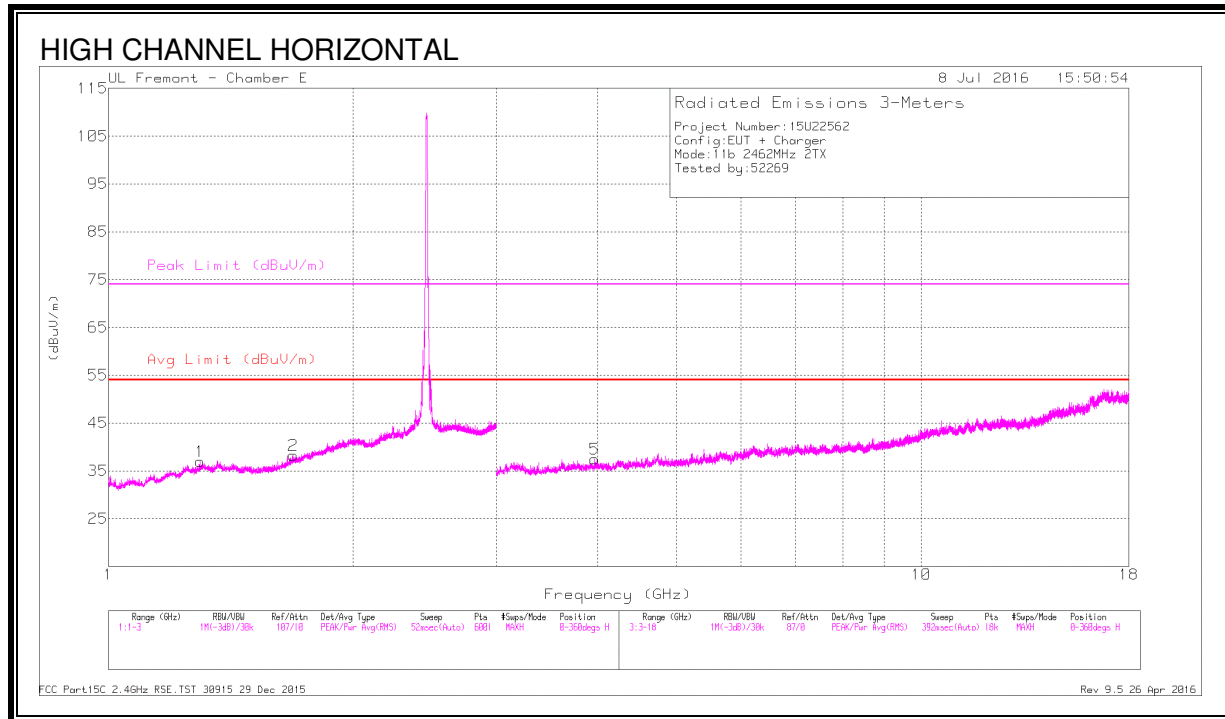


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.297	36.11	PK2	29.3	-22.6	42.81	-	-	74	-31.19	65	103	H
	* 1.297	24.83	MAv1	29.3	-22.6	31.53	54	-22.47	-	-	65	103	H
2	* 1.687	36.03	PK2	29	-21.1	43.93	-	-	74	-30.07	196	131	H
	* 1.687	25.09	MAv1	29	-21.1	32.99	54	-21.01	-	-	196	131	H
3	* 1.413	36.78	PK2	28.9	-22.1	43.58	-	-	74	-30.42	249	128	V
	* 1.413	24.91	MAv1	28.9	-22.1	31.71	54	-22.29	-	-	249	128	V
4	* 1.49	36.88	PK2	27.8	-21.6	43.08	-	-	74	-30.92	192	148	V
	* 1.493	25.13	MAv1	27.8	-21.6	31.33	54	-22.67	-	-	192	148	V
5	* 3.963	39.41	PK2	33.2	-29.6	43.01	-	-	74	-30.99	241	145	H
	* 3.965	28.59	MAv1	33.2	-29.5	32.29	54	-21.71	-	-	241	145	H
6	* 4.271	39.4	PK2	33.3	-29.2	43.5	-	-	74	-30.5	349	315	V
	* 4.27	28.9	MAv1	33.3	-29.2	33	54	-21	-	-	349	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 12)

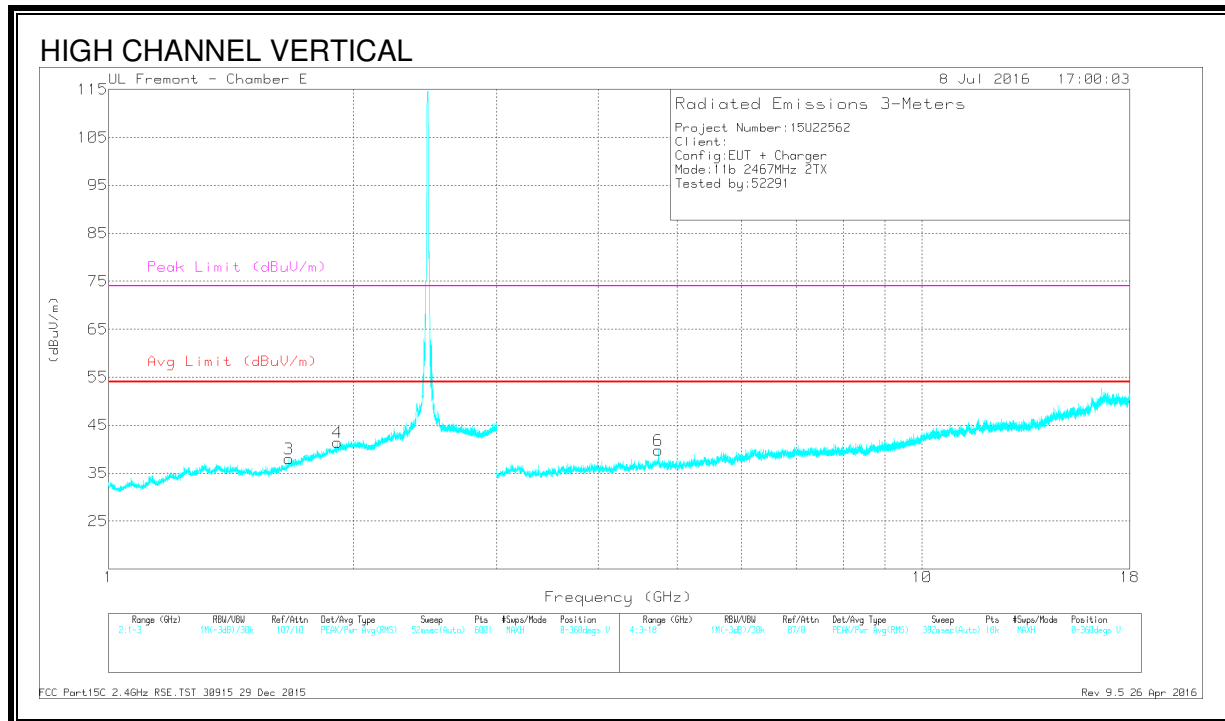
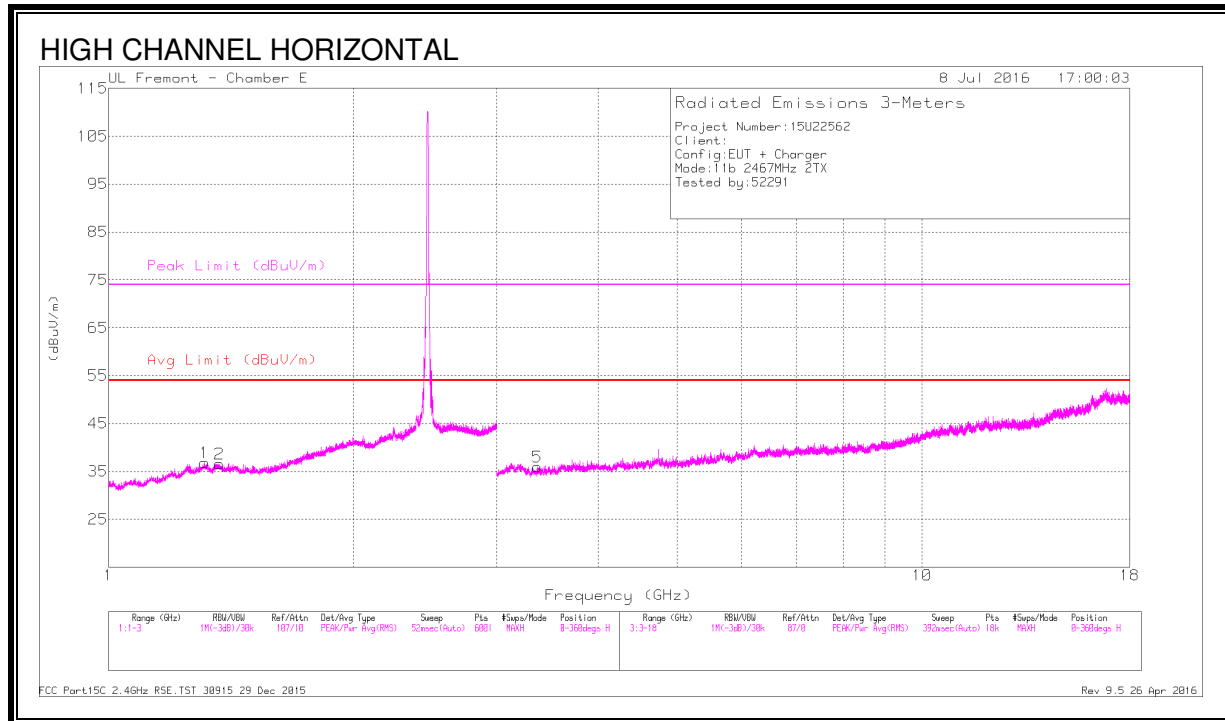


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.311	36.35	PK2	29.3	-22.4	43.25	-	-	74	-30.75	338	385	H
	* 1.313	25.23	MAv1	29.3	-22.3	32.23	54	-21.77	-	-	338	385	H
2	* 1.369	36.32	PK2	29.1	-22.2	43.22	-	-	74	-30.78	279	216	H
	* 1.367	25.25	MAv1	29.1	-22.2	32.15	54	-21.85	-	-	279	216	H
3	* 1.665	36.81	PK2	28.7	-21.2	44.31	-	-	74	-29.69	167	332	V
	* 1.663	25.13	MAv1	28.7	-21.2	32.63	54	-21.37	-	-	167	332	V
6	* 4.742	40.2	PK2	34	-29.1	45.1	-	-	74	-28.9	28	155	V
	* 4.741	29.09	MAv1	34	-29.1	33.99	54	-20.01	-	-	28	155	V
4	1.912	36.93	PK2	31.4	-20.7	47.63	-	-	-	-	223	371	V
5	3.369	41.05	PK2	32.8	-30.6	43.25	-	-	-	-	113	362	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 13)

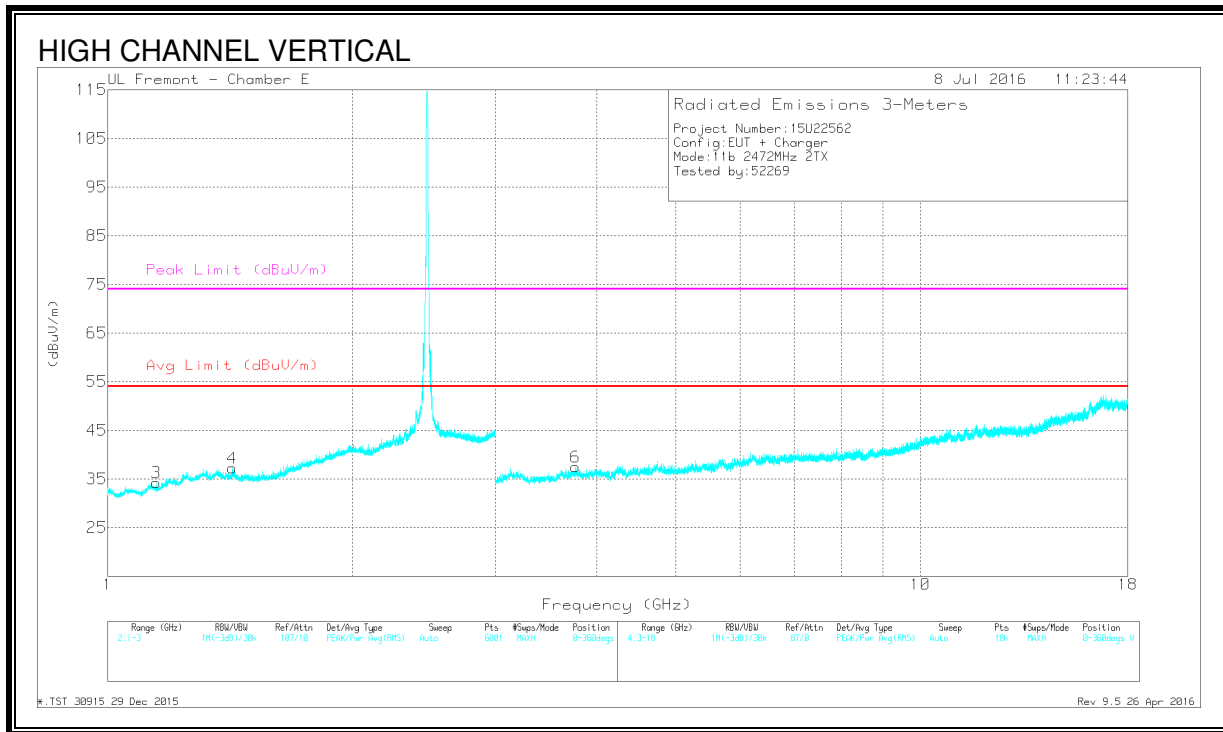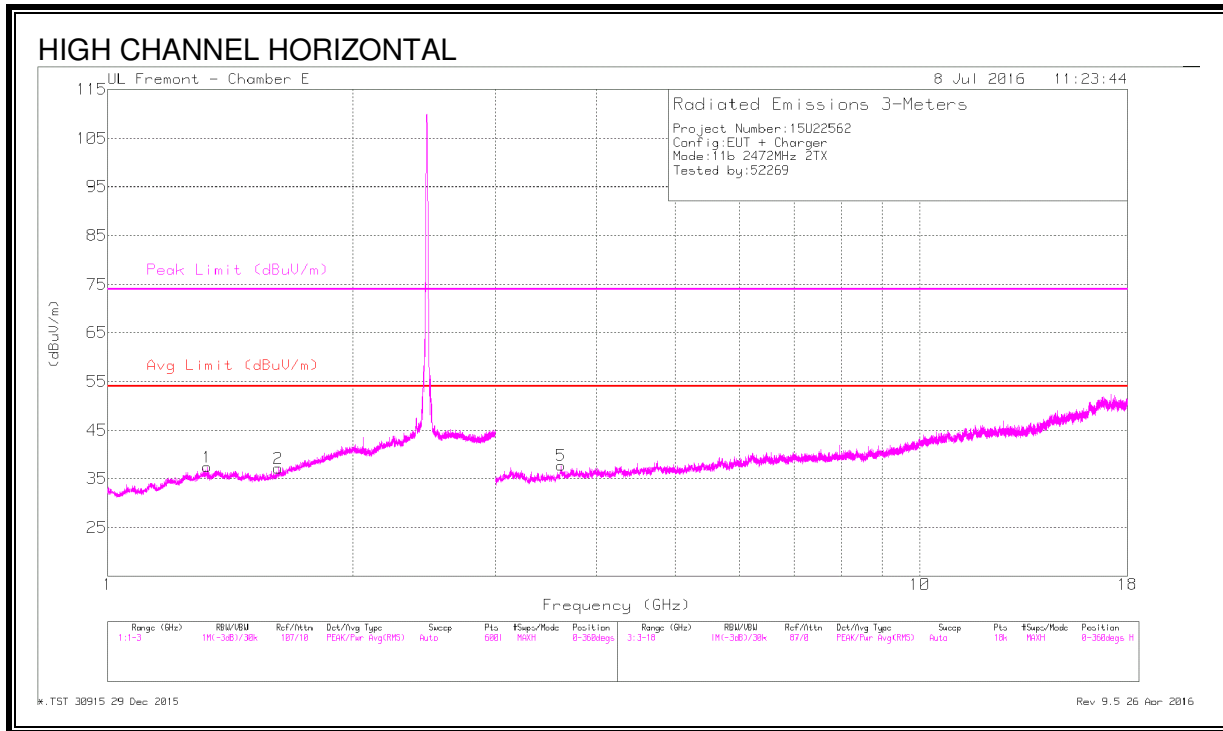


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.326	35.49	PK2	29.3	-22.3	42.49	-	-	74	-31.51	334	358	H
	* 1.325	24.75	MAv1	29.3	-22.3	31.75	54	-22.25	-	-	334	358	H
2	* 1.618	37.46	PK2	28.1	-21.5	44.06	-	-	74	-29.94	250	256	H
	* 1.617	25.28	MAv1	28.1	-21.5	31.88	54	-22.12	-	-	250	256	H
3	* 1.146	35.75	PK2	28.1	-23.5	40.35	-	-	74	-33.65	355	128	V
	* 1.147	25.08	MAv1	28.1	-23.5	29.68	54	-24.32	-	-	355	128	V
4	* 1.422	36.4	PK2	28.8	-21.9	43.3	-	-	74	-30.7	106	270	V
	* 1.422	25.2	MAv1	28.8	-22	32	54	-22	-	-	106	270	V
5	* 3.613	40.06	PK2	33	-30.5	42.56	-	-	74	-31.44	91	170	H
	* 3.615	29.77	MAv1	33	-30.5	32.27	54	-21.73	-	-	91	170	H
6	* 3.765	39.75	PK2	33.1	-30.2	42.65	-	-	74	-31.35	216	380	V
	* 3.763	29.23	MAv1	33.1	-30.2	32.13	54	-21.87	-	-	216	380	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

9.5. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND CHAIN 0


RESTRICTED BANDEGE (LOW CHANNEL, CH 1)

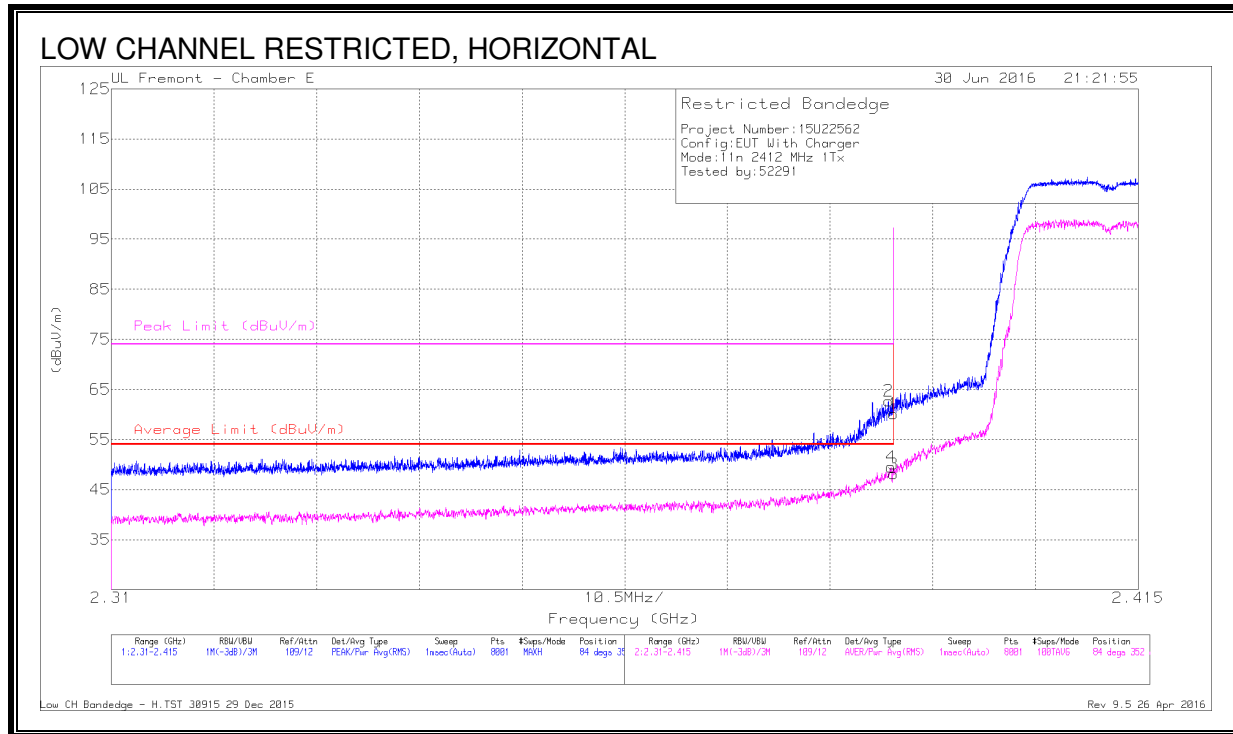

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	50.5	Pk	32.1	-19.9	62.7	-	-	74	-11.3	84	352	H
1	* 2.39	47.95	Pk	32.1	-19.9	60.15	-	-	74	-13.85	84	352	H
3	* 2.39	35.92	RMS	32.1	-19.9	48.12	54	-5.88	-	-	84	352	H
4	* 2.39	37.34	RMS	32.1	-19.9	49.54	54	-4.46	-	-	84	352	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

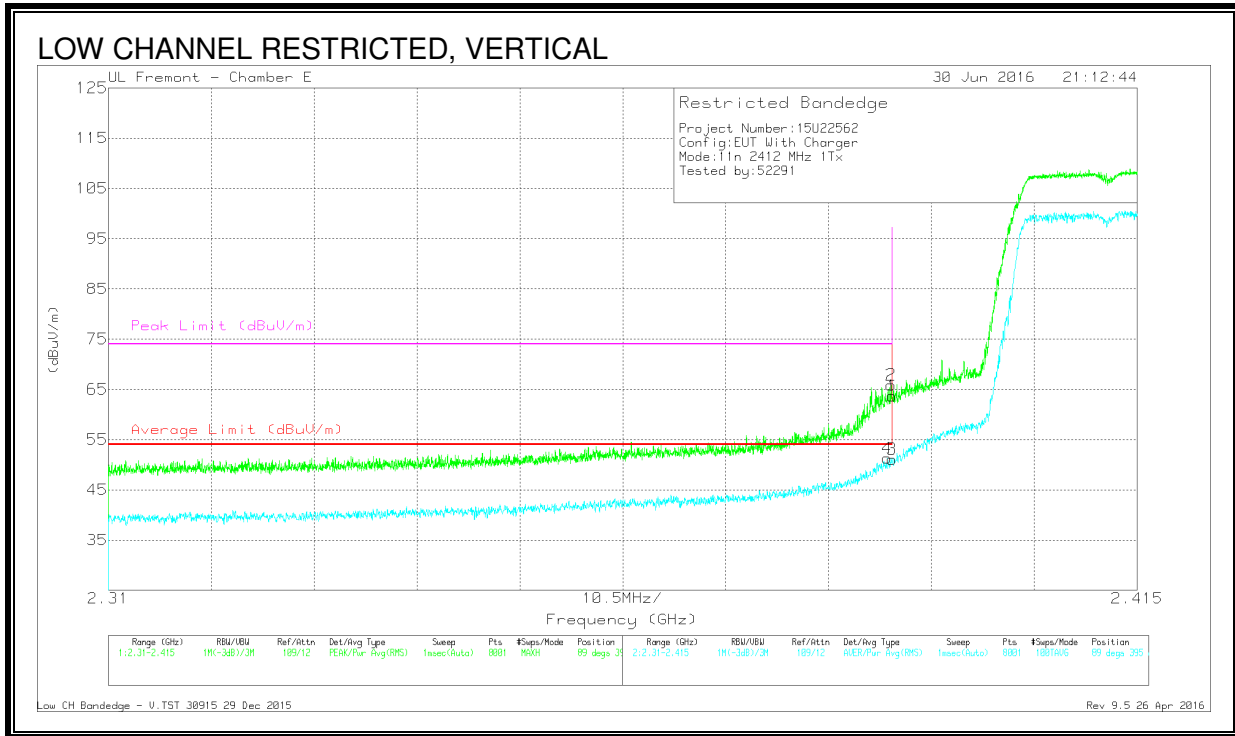


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.389	39.09	RMS	32.1	-19.9	51.29	54	-2.71	-	-	89	395	V
1	* 2.39	51.51	Pk	32.1	-19.9	63.71	-	-	74	-10.29	89	395	V
2	* 2.39	53.69	Pk	32.1	-19.9	65.89	-	-	74	-8.11	89	395	V
3	* 2.39	38.91	RMS	32.1	-19.9	51.11	54	-2.89	-	-	89	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

RESTRICTED BANDEGE (LOW CHANNEL, CH 2)

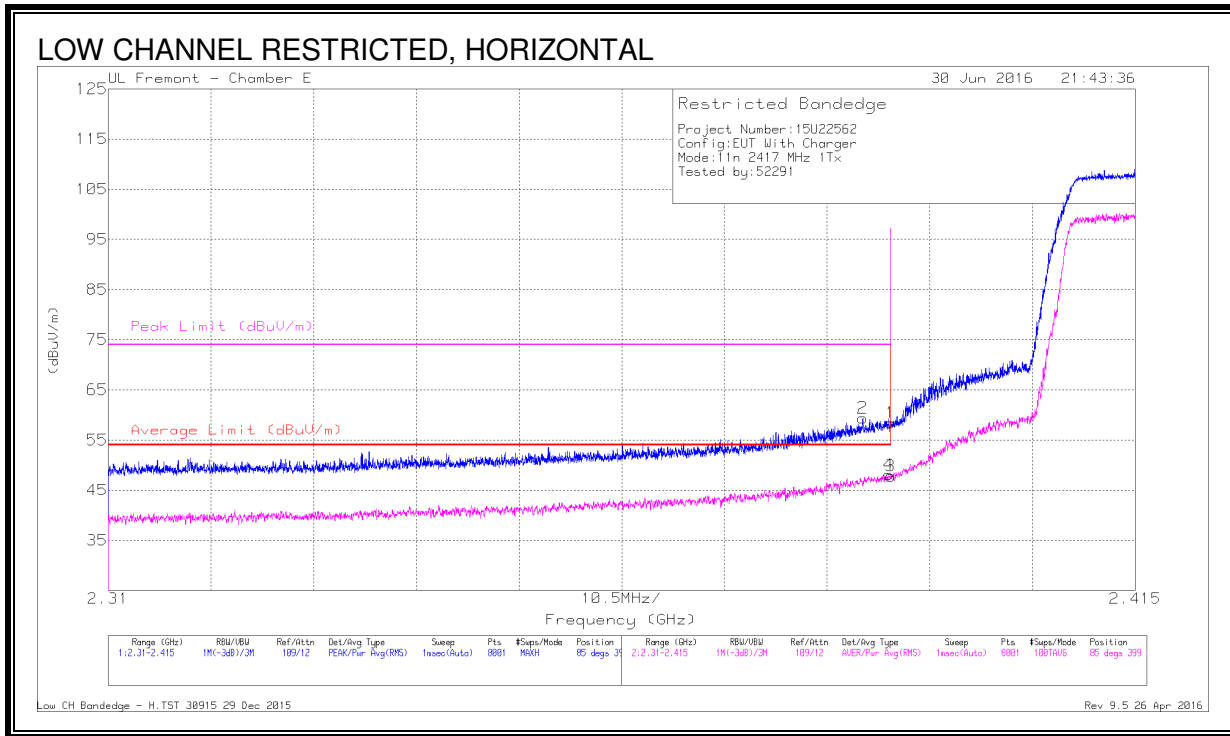


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.387	47.21	Pk	32.1	-19.9	59.41	-	-	74	-14.59	85	399	H
1	* 2.39	46.25	Pk	32.1	-19.9	58.45	-	-	74	-15.55	85	399	H
3	* 2.39	35.63	RMS	32.1	-19.9	47.83	54	-6.17	-	-	85	399	H
4	* 2.39	35.94	RMS	32.1	-19.9	48.14	54	-5.86	-	-	85	399	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

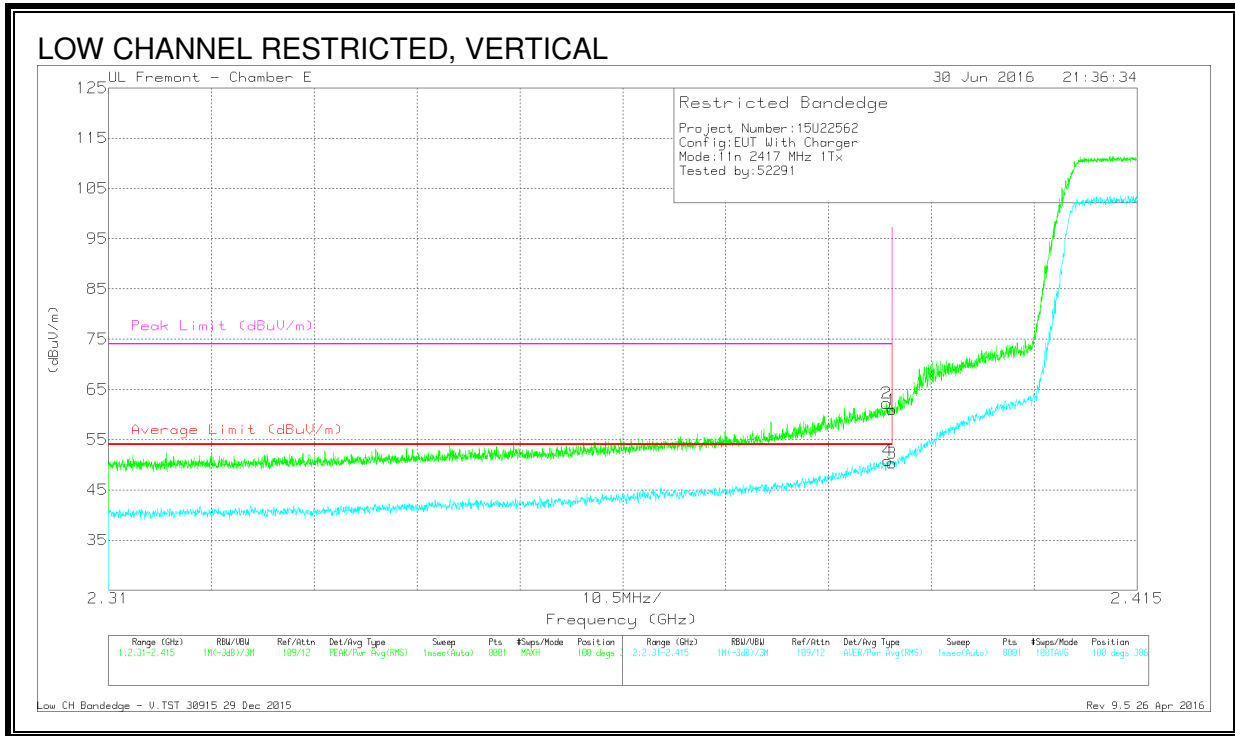

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	50.06	Pk	32.1	-19.9	62.26	-	-	74	-11.74	100	386	V
1	* 2.39	48.74	Pk	32.1	-19.9	60.94	-	-	74	-13.06	100	386	V
3	* 2.39	38.11	RMS	32.1	-19.9	50.31	54	-3.69	-	-	100	386	V
4	* 2.39	38.65	RMS	32.1	-19.9	50.85	54	-3.15	-	-	100	386	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL, CH 10)

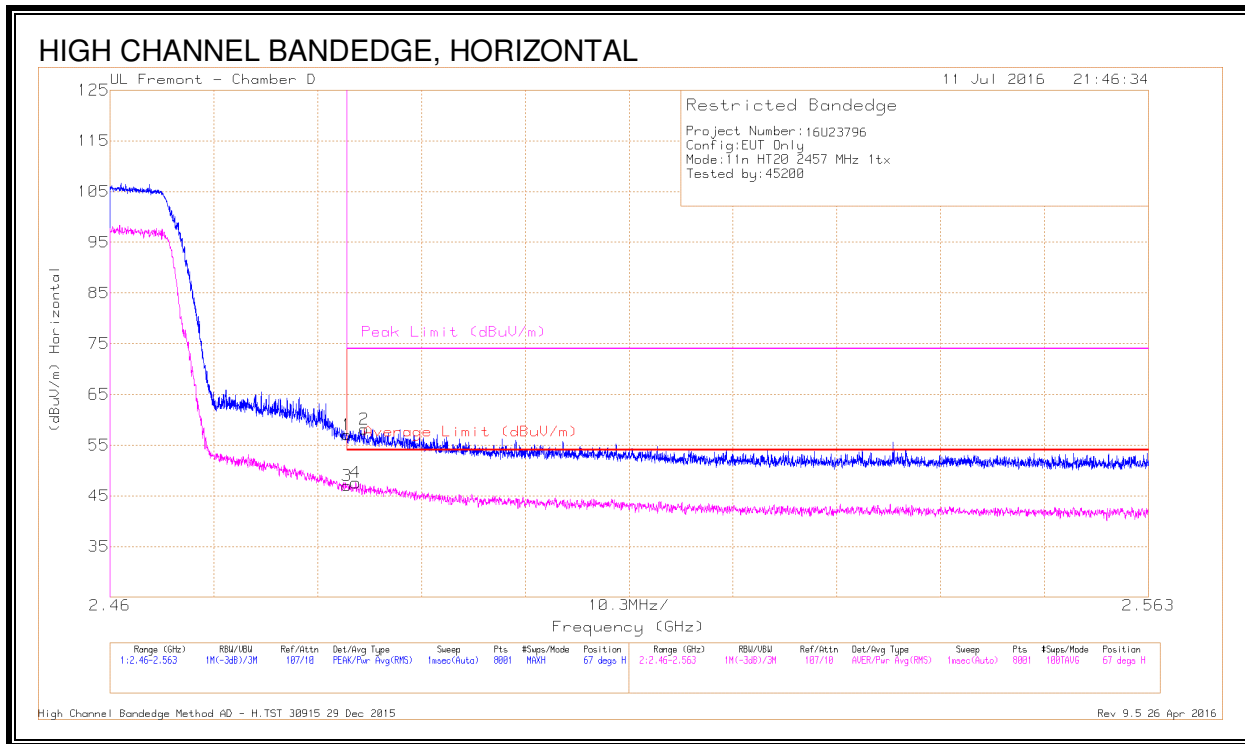


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.23	Pk	32.3	-20.5	57.03	-	-	74	-16.97	67	196	H
3	* 2.484	35.24	RMS	32.3	-20.5	47.04	54	-6.96	-	-	67	196	H
4	* 2.484	35.79	RMS	32.3	-20.5	47.59	54	-6.41	-	-	67	196	H
2	* 2.485	46.45	Pk	32.3	-20.6	58.15	-	-	74	-15.85	67	196	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

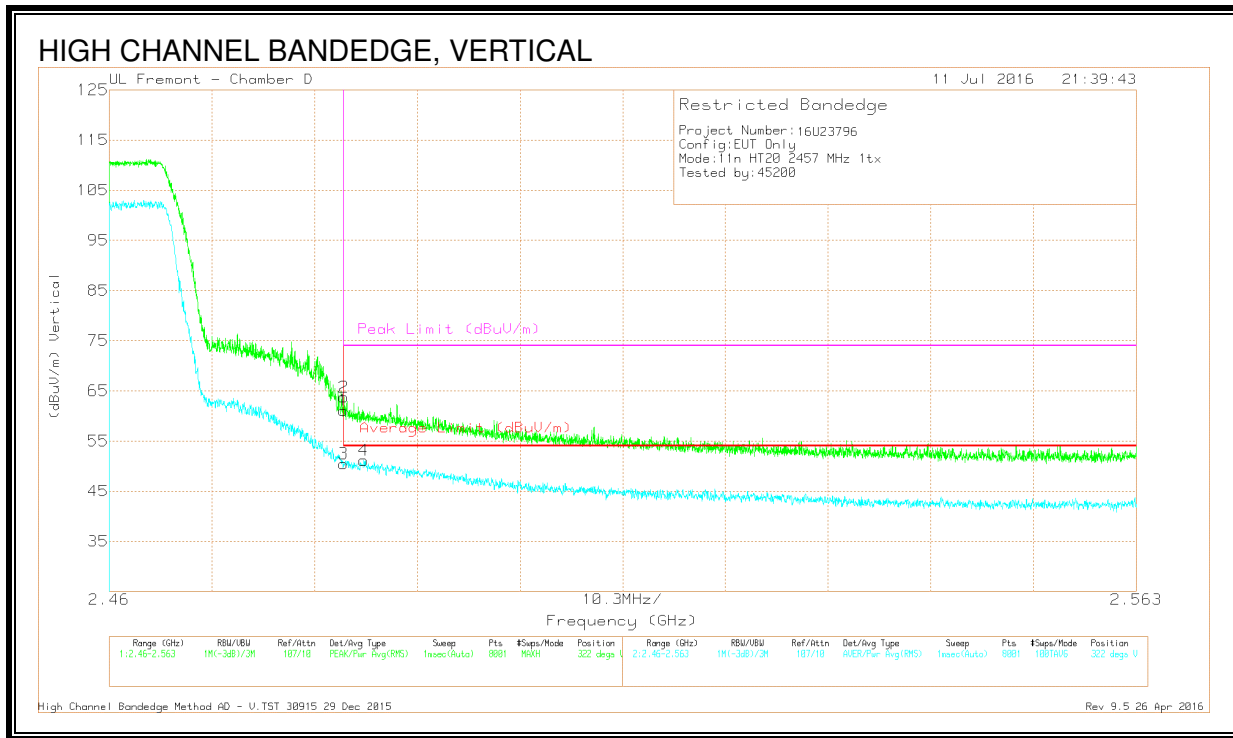

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.34	Pk	32.3	-20.5	61.14	-	-	74	-12.86	322	270	V
2	* 2.484	51.95	Pk	32.3	-20.5	63.75	-	-	74	-10.25	322	270	V
3	* 2.484	38.7	RMS	32.3	-20.5	50.5	54	-3.5	-	-	322	270	V
4	* 2.486	39.43	RMS	32.3	-20.6	51.13	54	-2.87	-	-	322	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL, CH 11)

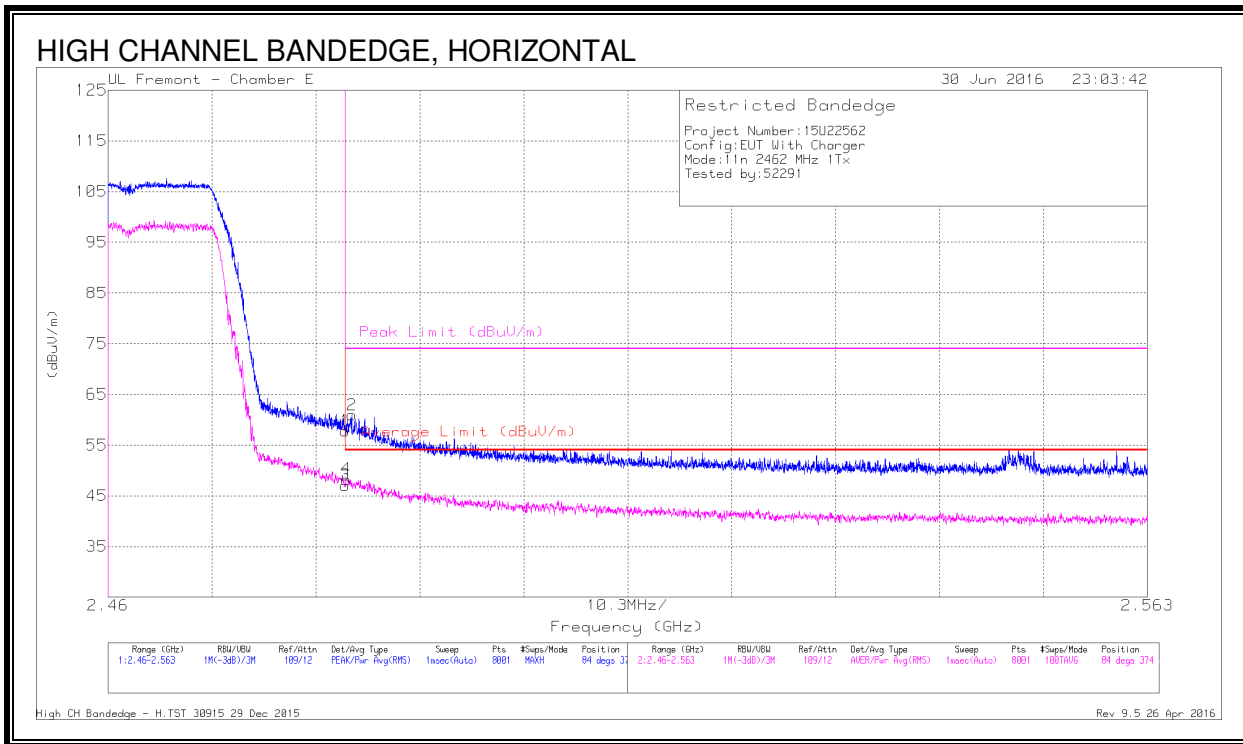


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.54	Pk	32.3	-20	57.84	-	-	74	-16.16	84	374	H
2	* 2.484	48.63	Pk	32.3	-20	60.93	-	-	74	-13.07	84	374	H
3	* 2.484	34.79	RMS	32.3	-20	47.09	54	-6.91	-	-	84	374	H
4	* 2.484	35.99	RMS	32.3	-20	48.29	54	-5.71	-	-	84	374	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

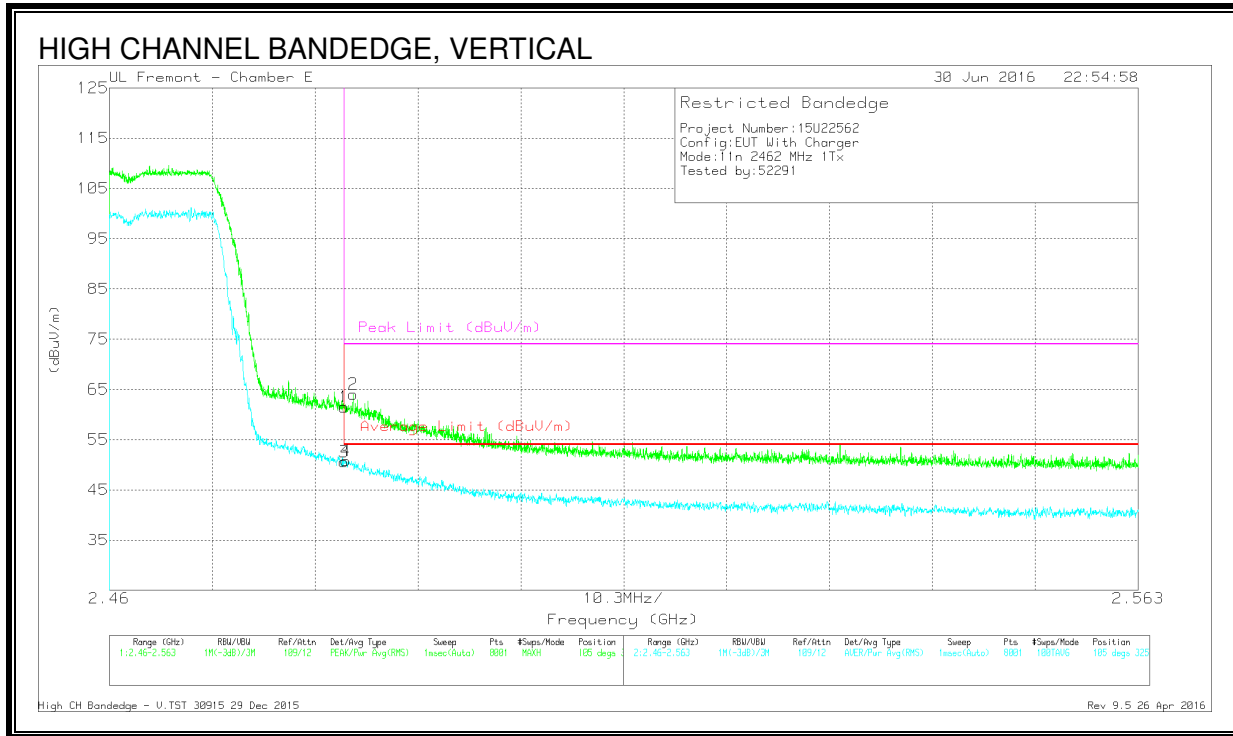

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.23	Pk	32.3	-20	61.53	-	-	74	-12.47	105	325	V
2	* 2.484	51.73	Pk	32.3	-20	64.03	-	-	74	-9.97	105	325	V
3	* 2.484	38.31	RMS	32.3	-20	50.61	54	-3.39	-	-	105	325	V
4	* 2.484	38.51	RMS	32.3	-20	50.81	54	-3.19	-	-	105	325	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEGE (HIGH CHANNEL, CH 12)

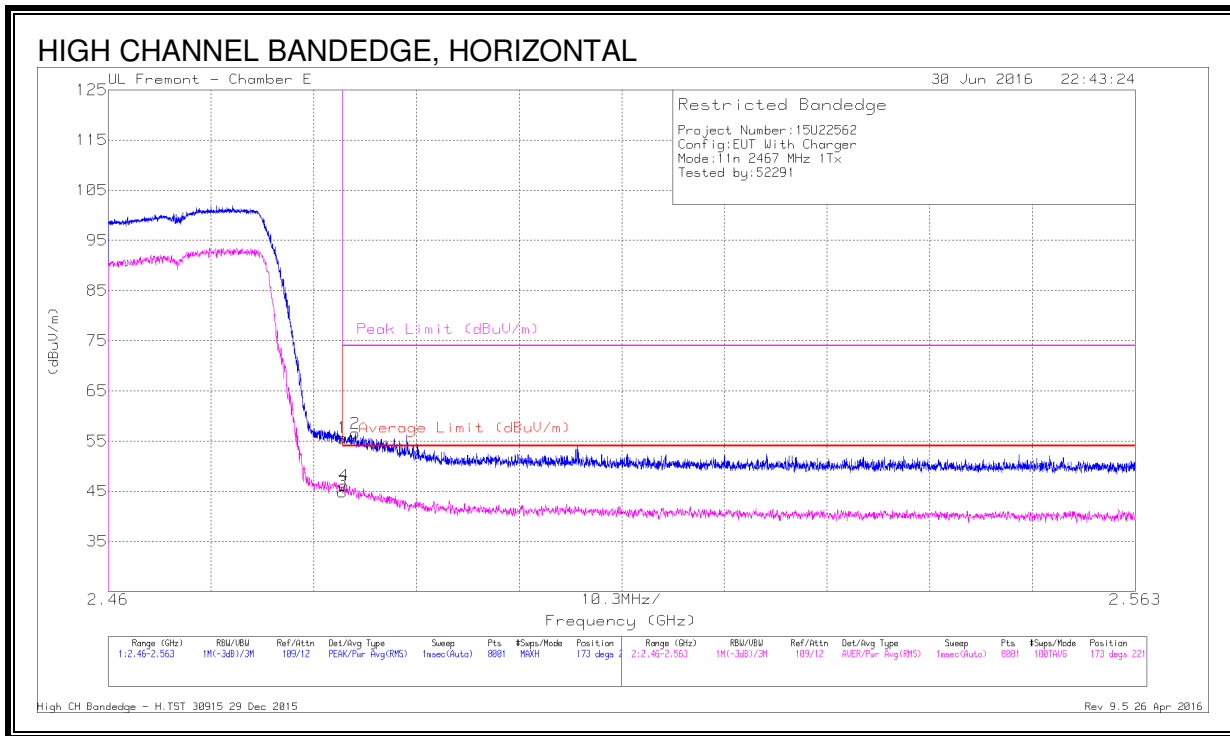

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.36	Pk	32.3	-20	55.66	-	-	74	-18.34	173	221	H
3	* 2.484	32.56	RMS	32.3	-20	44.86	54	-9.14	-	-	173	221	H
4	* 2.484	33.85	RMS	32.3	-20	46.15	54	-7.85	-	-	173	221	H
2	* 2.485	44.33	Pk	32.3	-20.1	56.53	-	-	74	-17.47	173	221	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

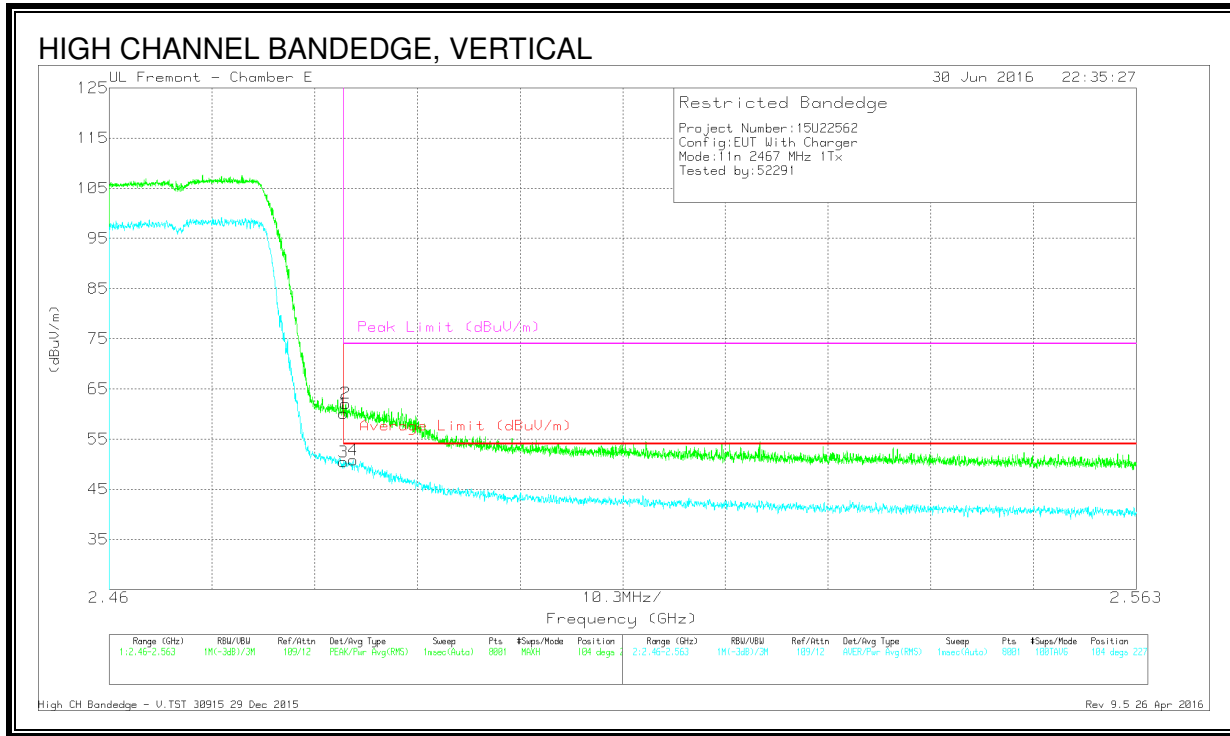

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.8	Pk	32.3	-20	60.1	-	-	74	-13.9	104	227	V
2	* 2.484	49.82	Pk	32.3	-20	62.12	-	-	74	-11.88	104	227	V
3	* 2.484	38.12	RMS	32.3	-20	50.42	54	-3.58	-	-	104	227	V
4	* 2.484	38.49	RMS	32.3	-20	50.79	54	-3.21	-	-	104	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE (HIGH CHANNEL, CH 13)

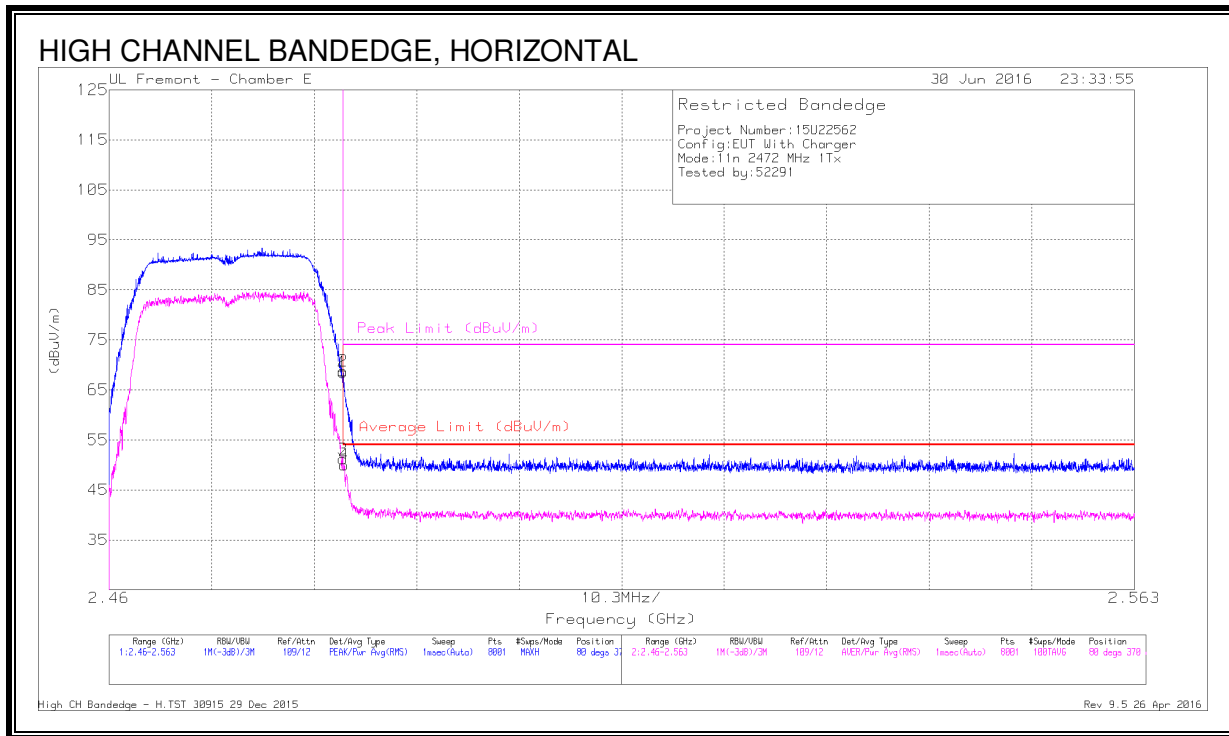


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.28	Pk	32.3	-20	68.58	-	-	74	-5.42	80	370	H
2	* 2.484	56.5	Pk	32.3	-20	68.8	-	-	74	-5.2	80	370	H
3	* 2.484	38.89	RMS	32.3	-20	51.19	54	-2.81	-	-	80	370	H
4	* 2.484	37.71	RMS	32.3	-20	50.01	54	-3.99	-	-	80	370	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

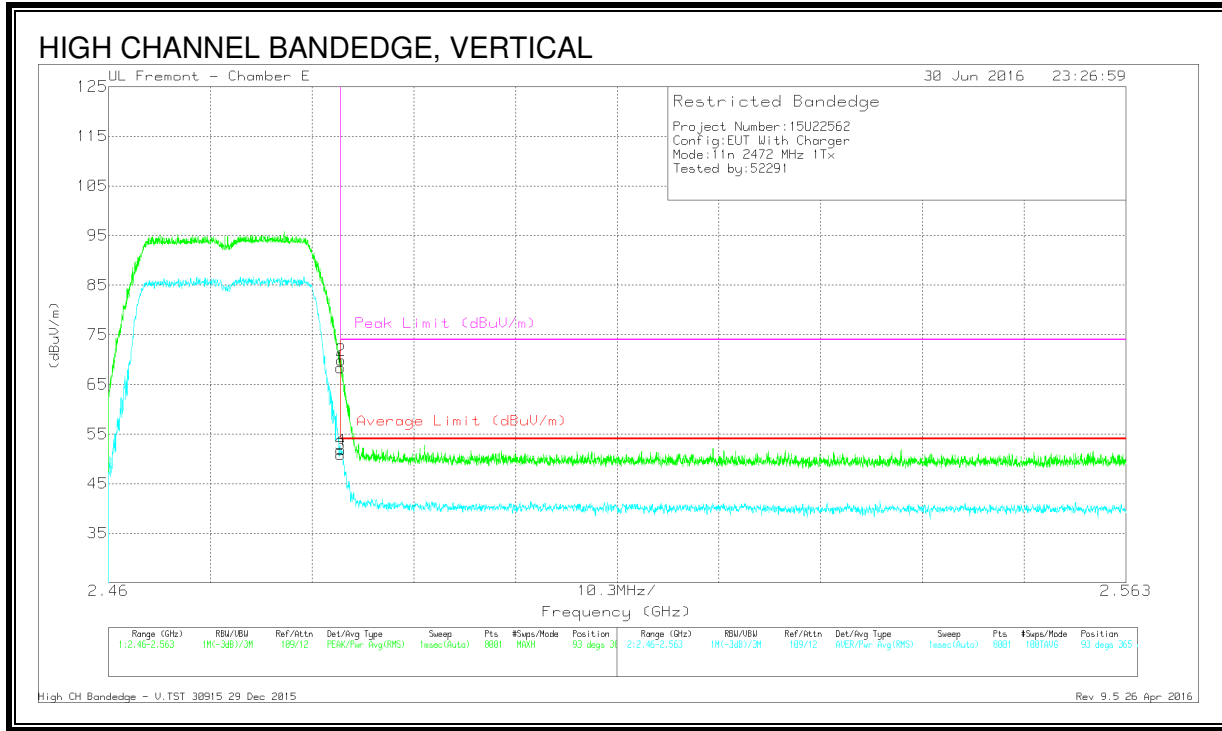

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.06	Pk	32.3	-20	68.36	-	-	74	-5.64	93	365	V
2	* 2.484	57.6	Pk	32.3	-20	69.9	-	-	74	-4.1	93	365	V
3	* 2.484	38.57	RMS	32.3	-20	50.87	54	-3.13	-	-	93	365	V
4	* 2.484	39.5	RMS	32.3	-20	51.8	54	-2.2	-	-	93	365	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 1)

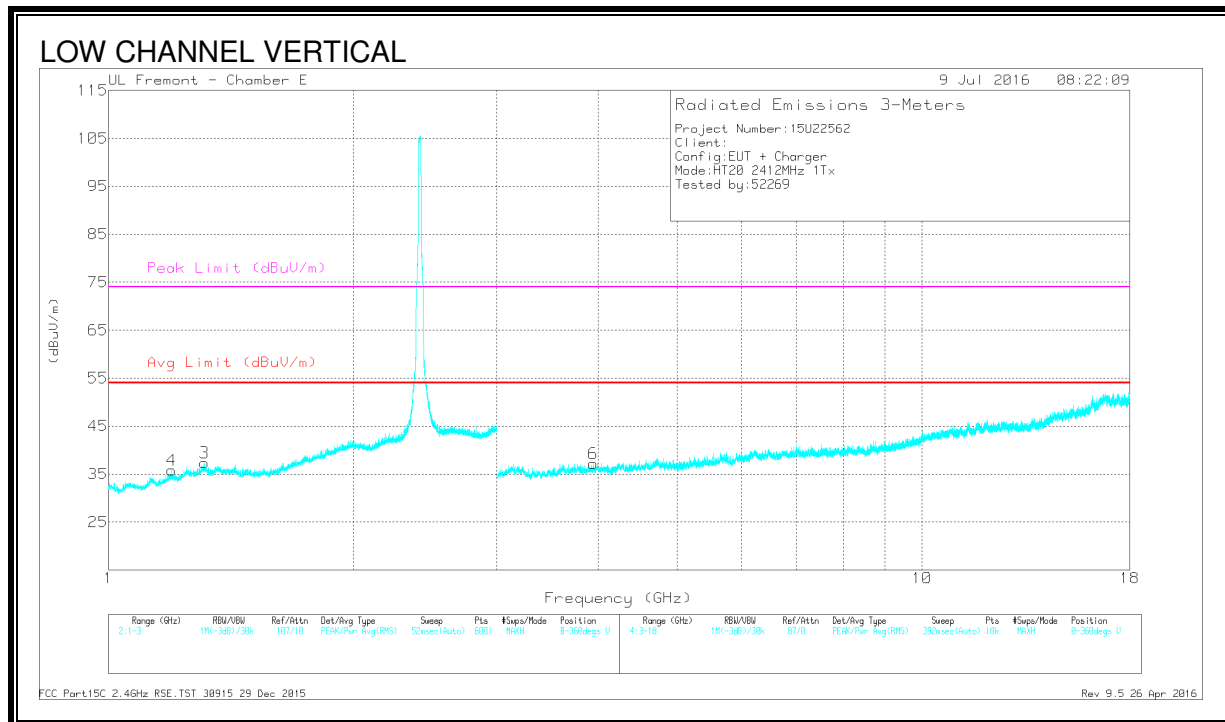
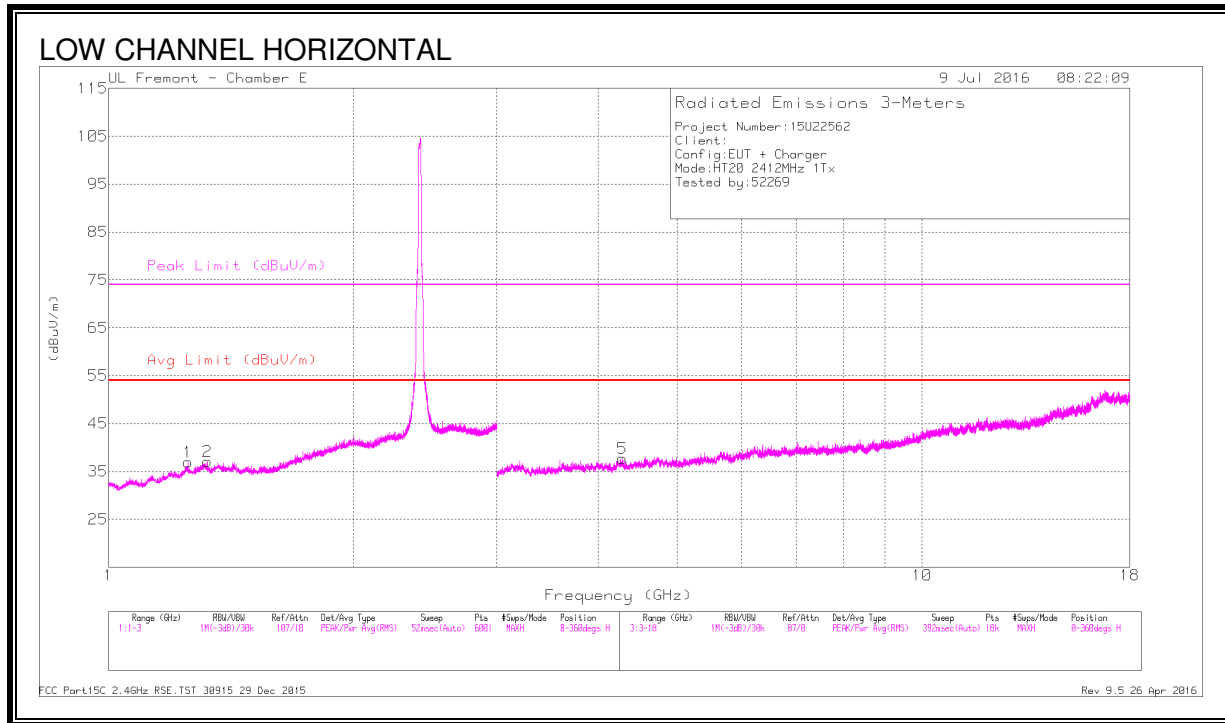


DATA

markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.253	36.82	PK2	29	-22.6	43.22	-	-	74	-30.78	319	227	H
	* 1.251	25.45	MAv1	29	-22.6	31.85	54	-22.15	-	-	319	227	H
2	* 1.322	36.11	PK2	29.3	-22.2	43.21	-	-	74	-30.79	231	191	H
	* 1.322	25.02	MAv1	29.3	-22.2	32.12	54	-21.88	-	-	231	191	H
3	* 1.313	36.79	PK2	29.3	-22.3	43.79	-	-	74	-30.21	118	292	V
	* 1.311	25.26	MAv1	29.3	-22.4	32.16	54	-21.84	-	-	118	292	V
4	* 1.195	36.21	PK2	28.5	-23	41.71	-	-	74	-32.29	252	134	V
	* 1.195	25.04	MAv1	28.5	-23.1	30.44	54	-23.56	-	-	252	134	V
5	* 4.284	39.79	PK2	33.3	-29.5	43.59	-	-	74	-30.41	115	223	H
	* 4.283	29.33	MAv1	33.3	-29.5	33.13	54	-20.87	-	-	115	223	H
6	* 3.945	39.46	PK2	33.2	-29.6	43.06	-	-	74	-30.94	32	194	V
	* 3.944	28.68	MAv1	33.2	-29.6	32.28	54	-21.72	-	-	32	194	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 2)

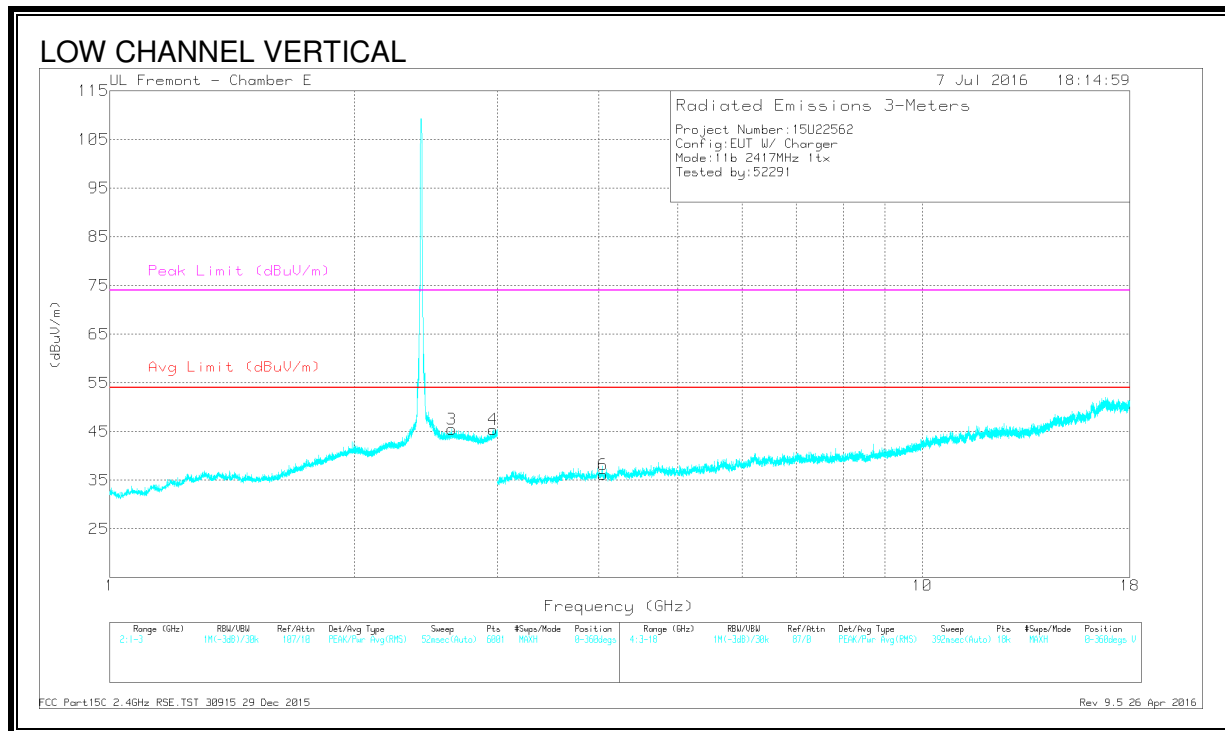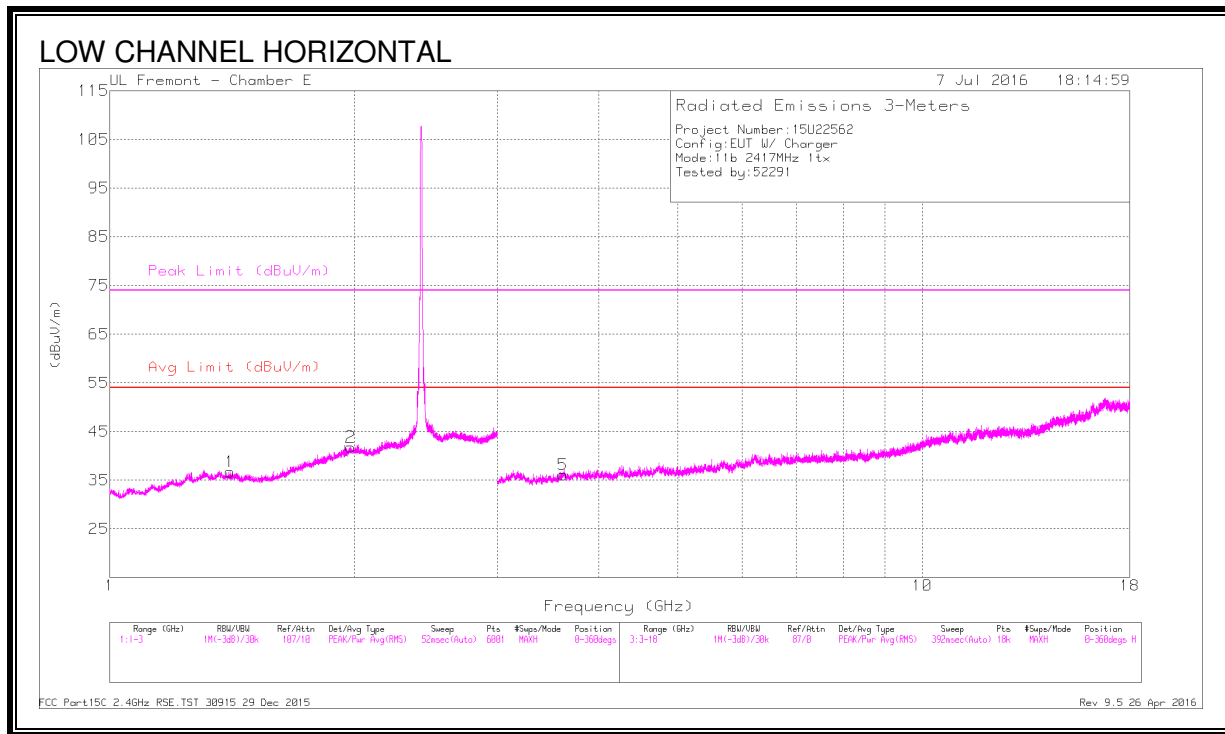

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.405	36.04	PK2	29	-22	43.04	-	-	74	-30.96	284	156	H
	* 1.406	24.66	MAv1	29	-22	31.66	54	-22.34	-	-	284	156	H
5	* 3.608	40.18	PK2	33	-30.5	42.68	-	-	74	-31.32	354	201	H
	* 3.61	29.8	MAv1	33	-30.5	32.3	54	-21.7	-	-	354	201	H
6	* 4.049	40.53	PK2	33.2	-30.7	43.03	-	-	74	-30.97	296	201	V
	* 4.05	29.77	MAv1	33.3	-30.7	32.37	54	-21.63	-	-	296	201	V
2	1.977	37.35	PK2	31.8	-20.4	48.75	-	-	-	-	159	101	H
3	2.636	38.49	PK2	32.6	-19.7	51.39	-	-	-	-	104	200	V
4	2.967	37.73	PK2	32.3	-19.3	50.73	-	-	-	-	217	318	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 6)

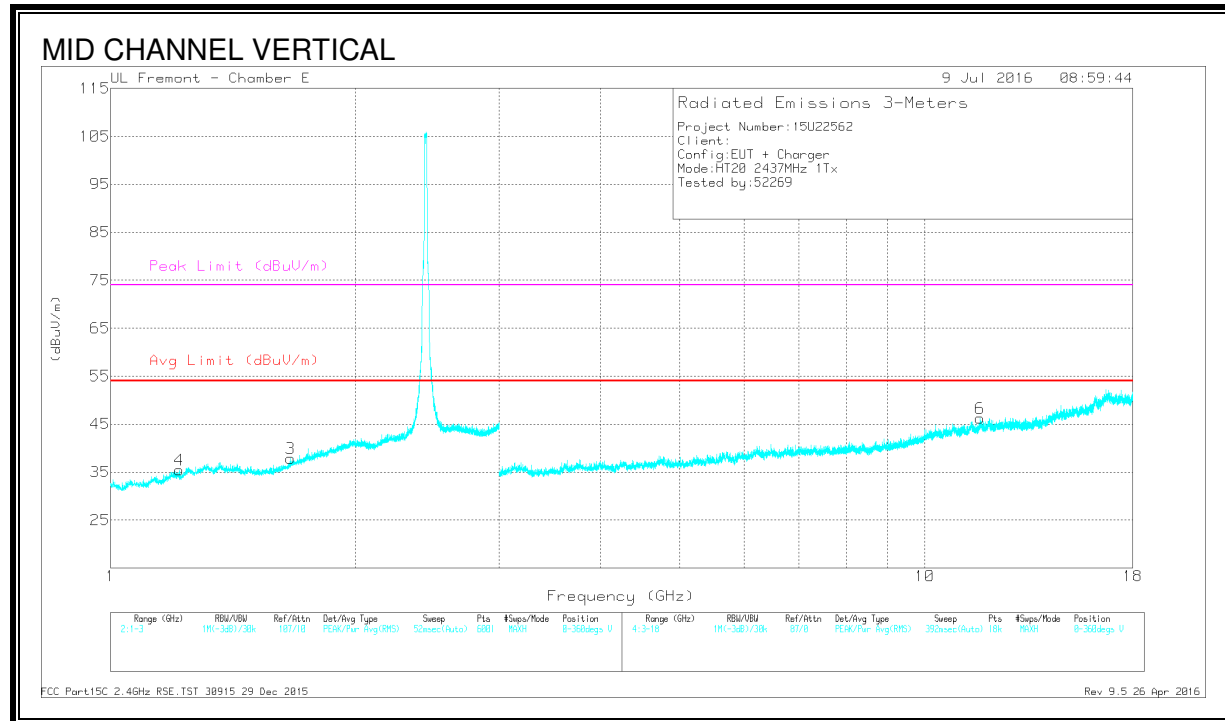
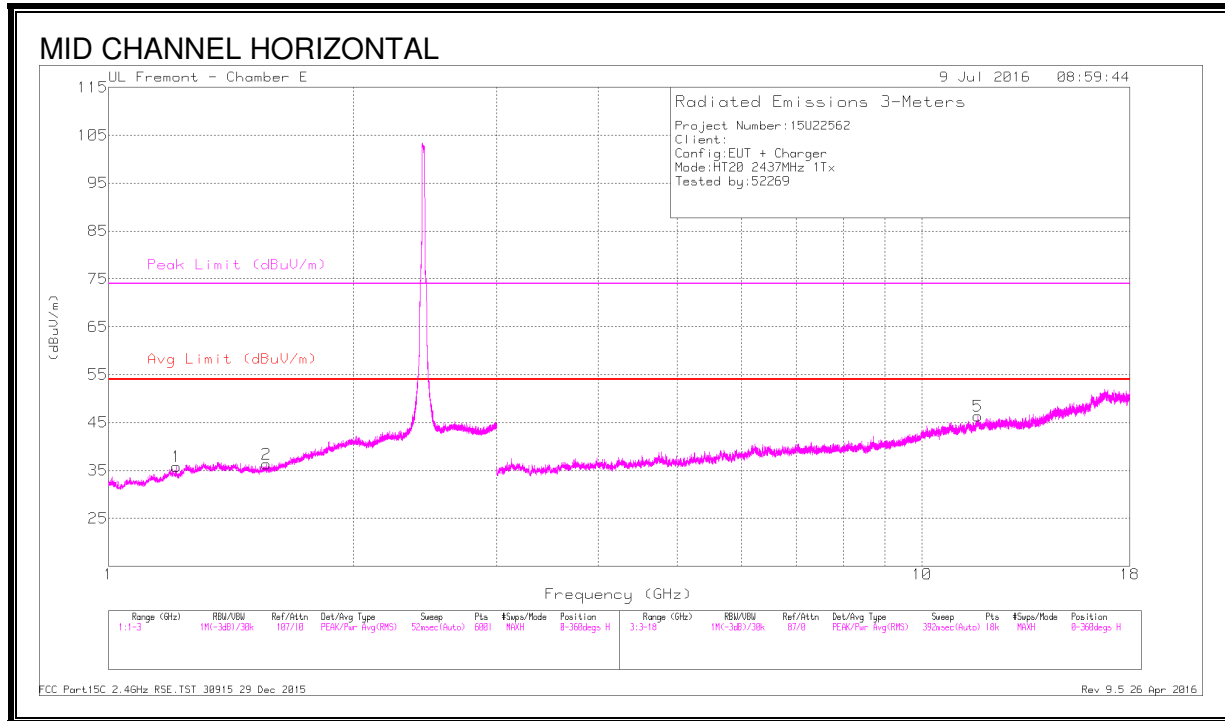


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.212	35.68	PK2	28.6	-22.9	41.38	-	-	74	-32.62	3	366	H
	* 1.211	24.57	MAv1	28.6	-22.9	30.27	54	-23.73	-	-	3	366	H
2	* 1.565	35.99	PK2	27.8	-21.5	42.29	-	-	74	-31.71	28	326	H
	* 1.563	25.02	MAv1	27.8	-21.5	31.32	54	-22.68	-	-	28	326	H
3	* 1.663	36.36	PK2	28.7	-21.2	43.86	-	-	74	-30.14	44	131	V
	* 1.666	25.09	MAv1	28.7	-21.2	32.59	54	-21.41	-	-	44	131	V
4	* 1.212	35.67	PK2	28.7	-22.9	41.47	-	-	74	-32.53	81	307	V
	* 1.212	24.59	MAv1	28.7	-22.9	30.39	54	-23.61	-	-	81	307	V
5	* 11.712	36.46	PK2	38.6	-22.5	52.56	-	-	74	-21.44	331	260	H
	* 11.713	25.38	MAv1	38.6	-22.5	41.48	54	-12.52	-	-	331	260	H
6	* 11.679	37.77	PK2	38.6	-22.4	53.97	-	-	74	-20.03	307	151	V
	* 11.681	25.25	MAv1	38.6	-22.3	41.55	54	-12.45	-	-	307	151	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 10)

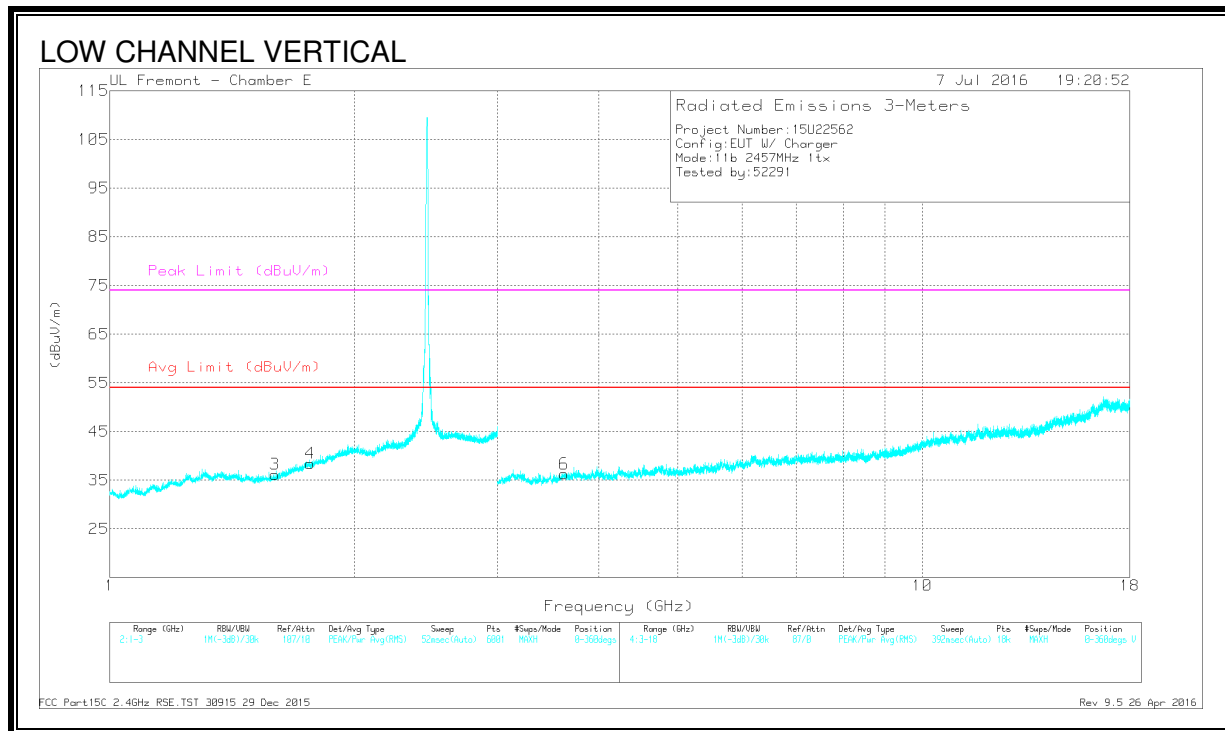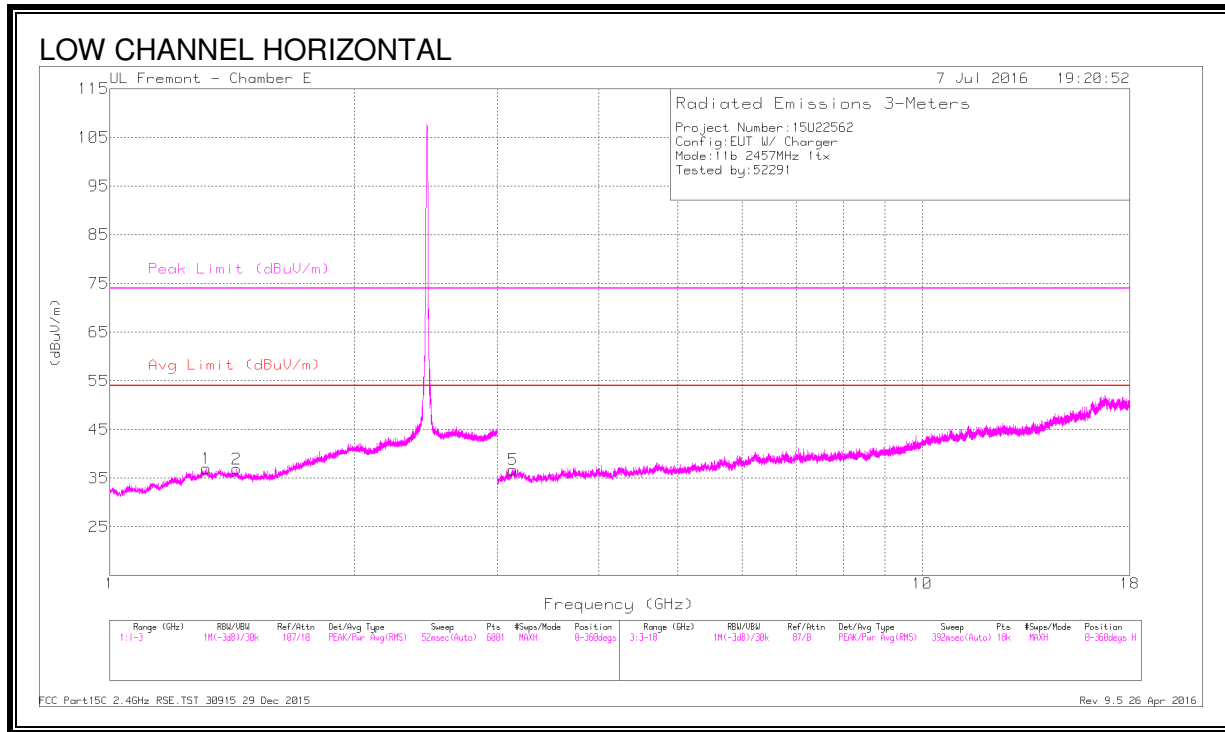

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.317	36.39	PK2	29.3	-22.3	43.39	-	-	74	-30.61	200	382	H
	* 1.313	25.14	MAv1	29.3	-22.3	32.14	54	-21.86	-	-	200	382	H
3	* 1.597	37.15	PK2	27.9	-21.4	43.65	-	-	74	-30.35	162	124	V
	* 1.599	25.73	MAv1	27.9	-21.4	32.23	54	-21.77	-	-	162	124	V
6	* 3.626	40.7	PK2	33	-30.4	43.3	-	-	74	-30.7	153	222	V
	* 3.623	30.18	MAv1	33	-30.4	32.78	54	-21.22	-	-	153	222	V
2	1.433	29.99	PK2	28.6	-21.7	36.89	-	-	-	-	102	148	H
4	1.764	36.4	PK2	30	-21	45.4	-	-	-	-	52	154	V
5	3.14	40.99	PK2	33.2	-30	44.19	-	-	-	-	248	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 11)

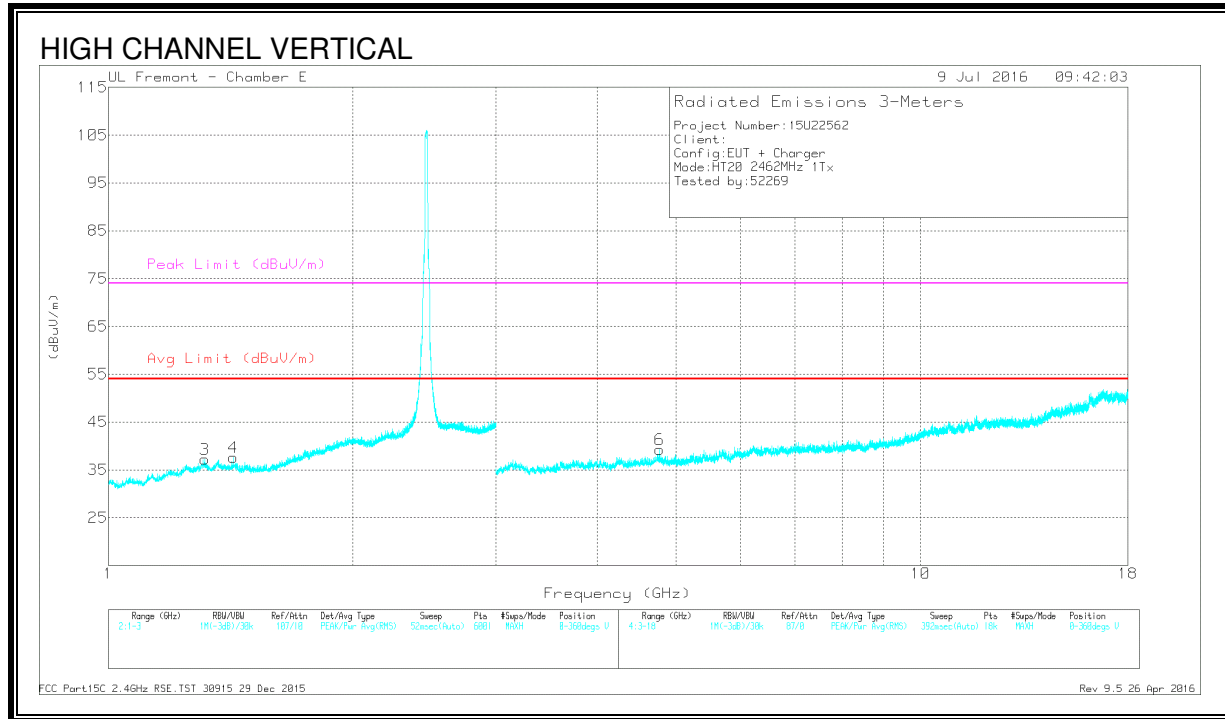
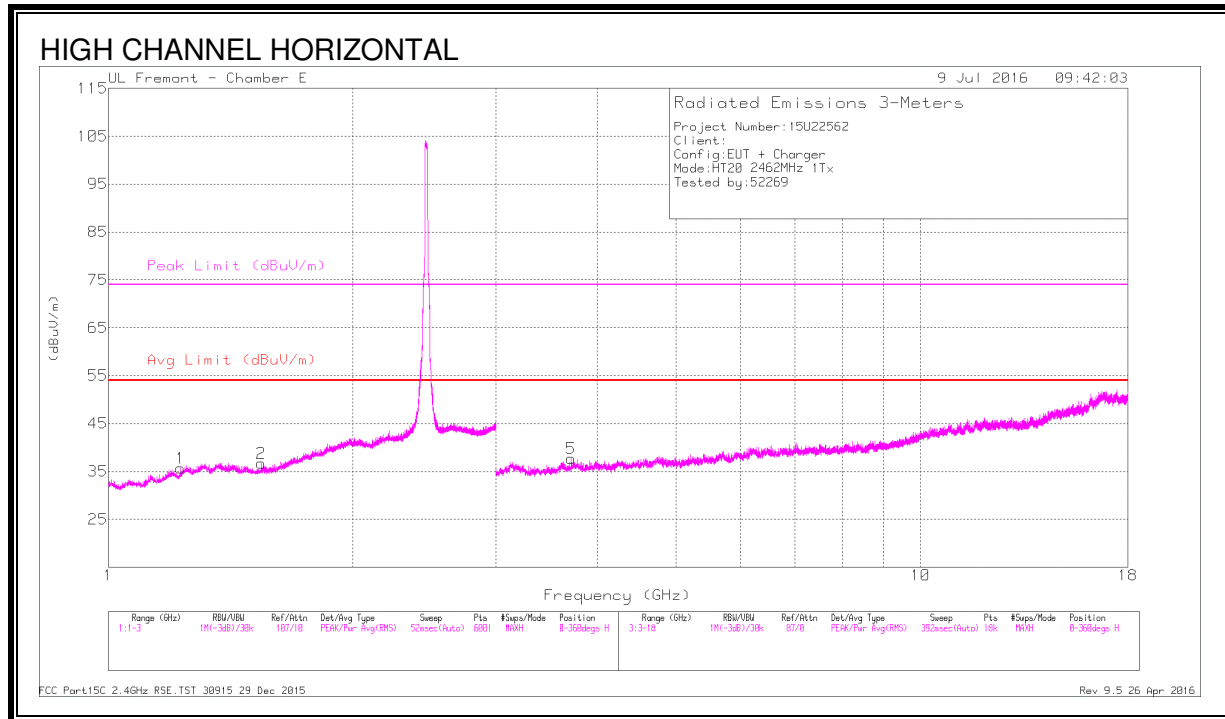


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.226	35.87	PK2	28.8	-22.9	41.77	-	-	74	-32.23	40	173	H
	* 1.226	24.52	MAv1	28.8	-22.9	30.42	54	-23.58	-	-	40	173	H
2	* 1.542	36.1	PK2	27.8	-21.6	42.3	-	-	74	-31.7	248	384	H
	* 1.542	25.2	MAv1	27.8	-21.6	31.4	54	-22.6	-	-	248	384	H
3	* 1.314	36.29	PK2	29.3	-22.3	43.29	-	-	74	-30.71	119	109	V
	* 1.313	25.26	MAv1	29.3	-22.3	32.26	54	-21.74	-	-	119	109	V
4	* 1.425	35.91	PK2	28.7	-21.9	42.71	-	-	74	-31.29	243	284	V
	* 1.424	25.06	MAv1	28.7	-21.9	31.86	54	-22.14	-	-	243	284	V
5	* 3.714	39.95	PK2	33.1	-30.2	42.85	-	-	74	-31.15	86	378	H
	* 3.717	29.19	MAv1	33.1	-30.2	32.09	54	-21.91	-	-	86	378	H
6	* 4.771	39.21	PK2	34	-29.3	43.91	-	-	74	-30.09	128	311	V
	* 4.771	28.53	MAv1	34	-29.3	33.23	54	-20.77	-	-	128	311	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 12)

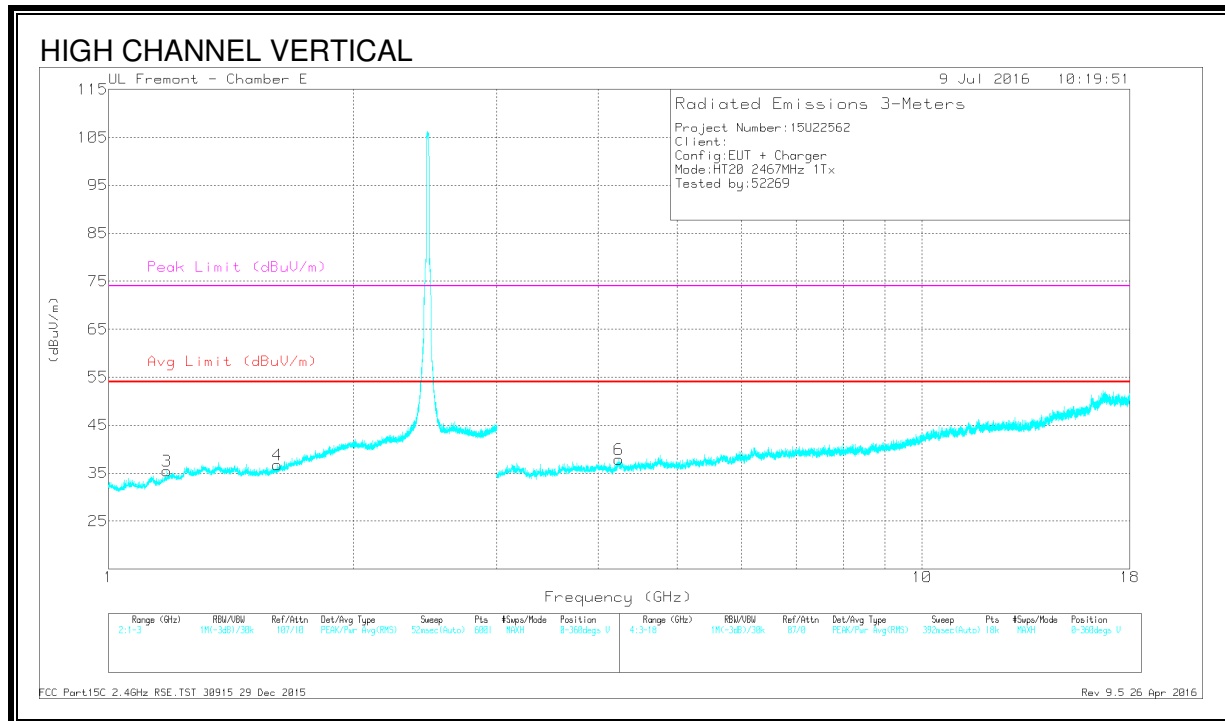
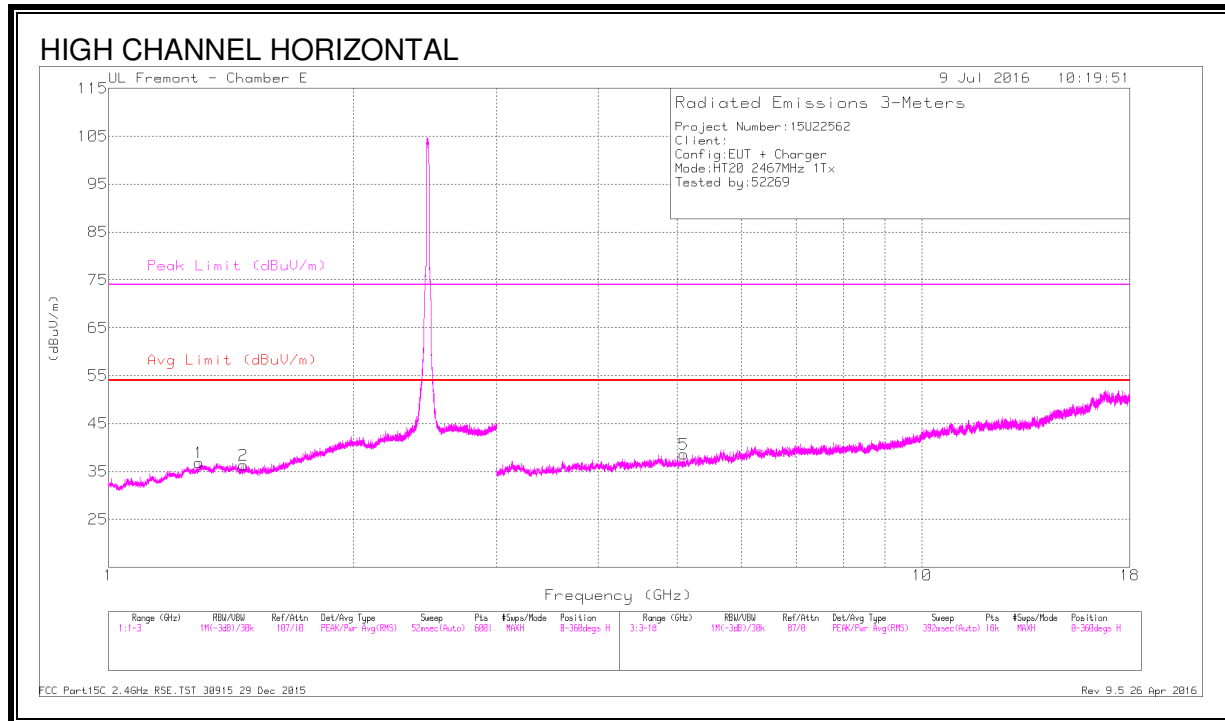


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.294	36.09	PK2	29.3	-22.5	42.89	-	-	74	-31.11	270	250	H
	* 1.294	24.84	MAv1	29.3	-22.5	31.64	54	-22.36	-	-	270	250	H
2	* 1.462	36.36	PK2	28.2	-21.8	42.76	-	-	74	-31.24	94	359	H
	* 1.462	24.9	MAv1	28.2	-21.8	31.3	54	-22.7	-	-	94	359	H
3	* 1.181	36.21	PK2	28.4	-23.2	41.41	-	-	74	-32.59	191	144	V
	* 1.181	25.25	MAv1	28.4	-23.2	30.45	54	-23.55	-	-	191	144	V
4	* 1.615	37.42	PK2	28	-21.5	43.92	-	-	74	-30.08	224	203	V
	* 1.612	25.17	MAv1	28	-21.5	31.67	54	-22.33	-	-	224	203	V
5	* 5.097	39.61	PK2	34	-29.7	43.91	-	-	74	-30.09	25	320	H
	* 5.099	29.26	MAv1	34	-29.8	33.46	54	-20.54	-	-	25	320	H
6	* 4.241	38.72	PK2	33.3	-29	43.02	-	-	74	-30.98	10	248	V
	* 4.239	28.66	MAv1	33.3	-29	32.96	54	-21.04	-	-	10	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, CH 13)

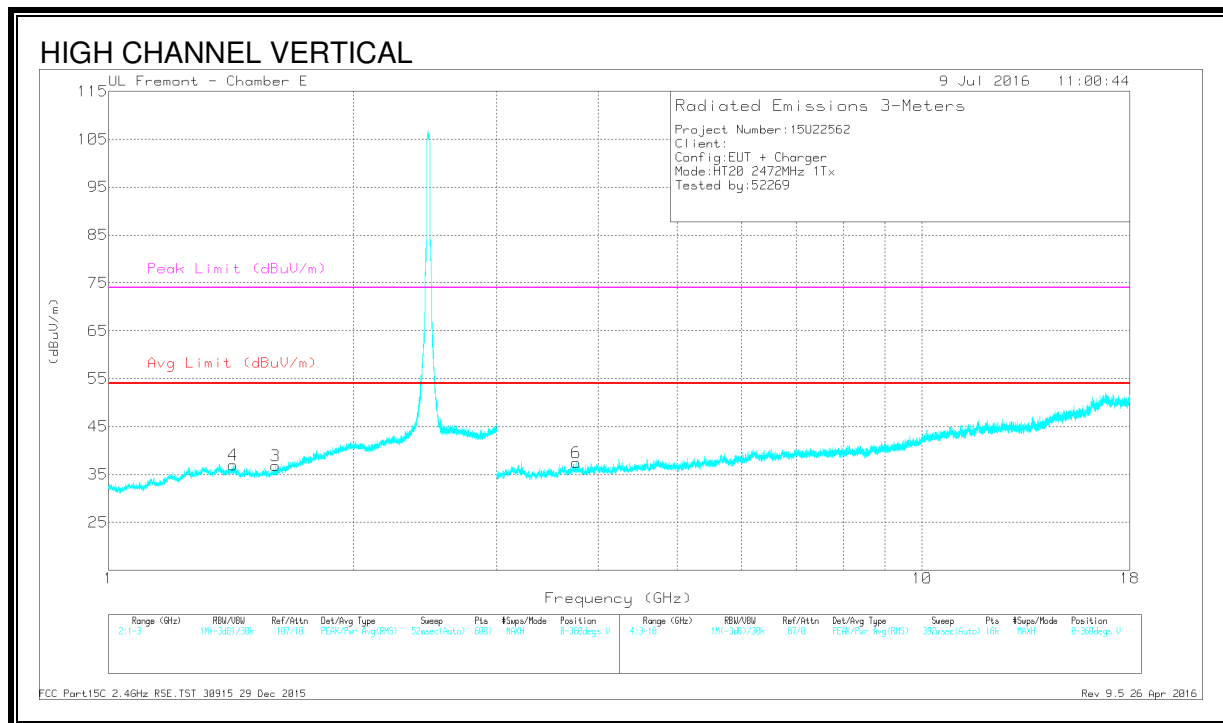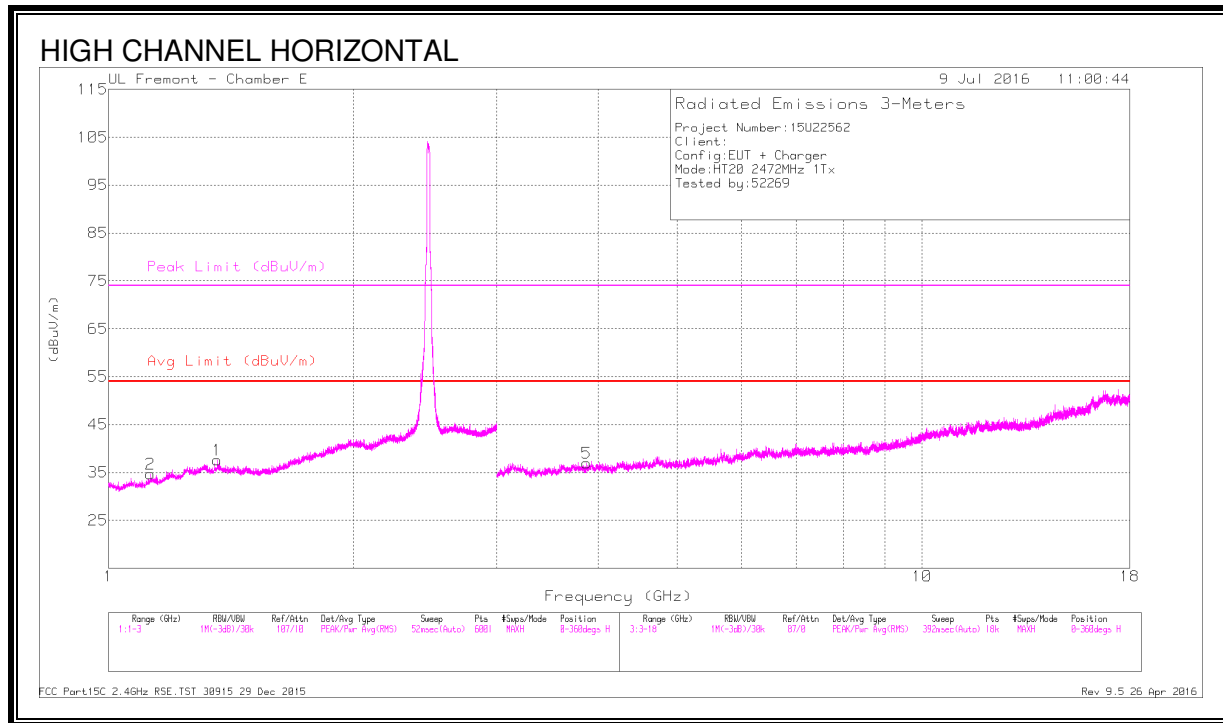


DATA

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.362	36.57	PK2	29.2	-22.1	43.67	-	-	74	-30.33	275	282	H
	* 1.362	25.28	MAv1	29.2	-22.1	32.38	54	-21.62	-	-	275	282	H
2	* 1.126	36.18	PK2	27.9	-23.4	40.68	-	-	74	-33.32	330	202	H
	* 1.125	25.36	MAv1	27.9	-23.4	29.86	54	-24.14	-	-	330	202	H
3	* 1.605	37.31	PK2	27.9	-21.6	43.61	-	-	74	-30.39	67	218	V
	* 1.603	25.16	MAv1	27.9	-21.5	31.56	54	-22.44	-	-	67	218	V
4	* 1.423	36.38	PK2	28.7	-21.9	43.18	-	-	74	-30.82	186	141	V
	* 1.424	25.06	MAv1	28.7	-21.9	31.86	54	-22.14	-	-	186	141	V
5	* 3.868	40.65	PK2	33.3	-30.9	43.05	-	-	74	-30.95	302	232	H
	* 3.867	30.03	MAv1	33.3	-30.9	32.43	54	-21.57	-	-	302	232	H
6	* 3.76	39.63	PK2	33.1	-30.1	42.63	-	-	74	-31.37	102	181	V
	* 3.76	29.39	MAv1	33.1	-30.1	32.39	54	-21.61	-	-	102	181	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

9.6. 802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND CHAIN 1


RESTRICTED BANDEDGE (LOW CHANNEL, CH1)

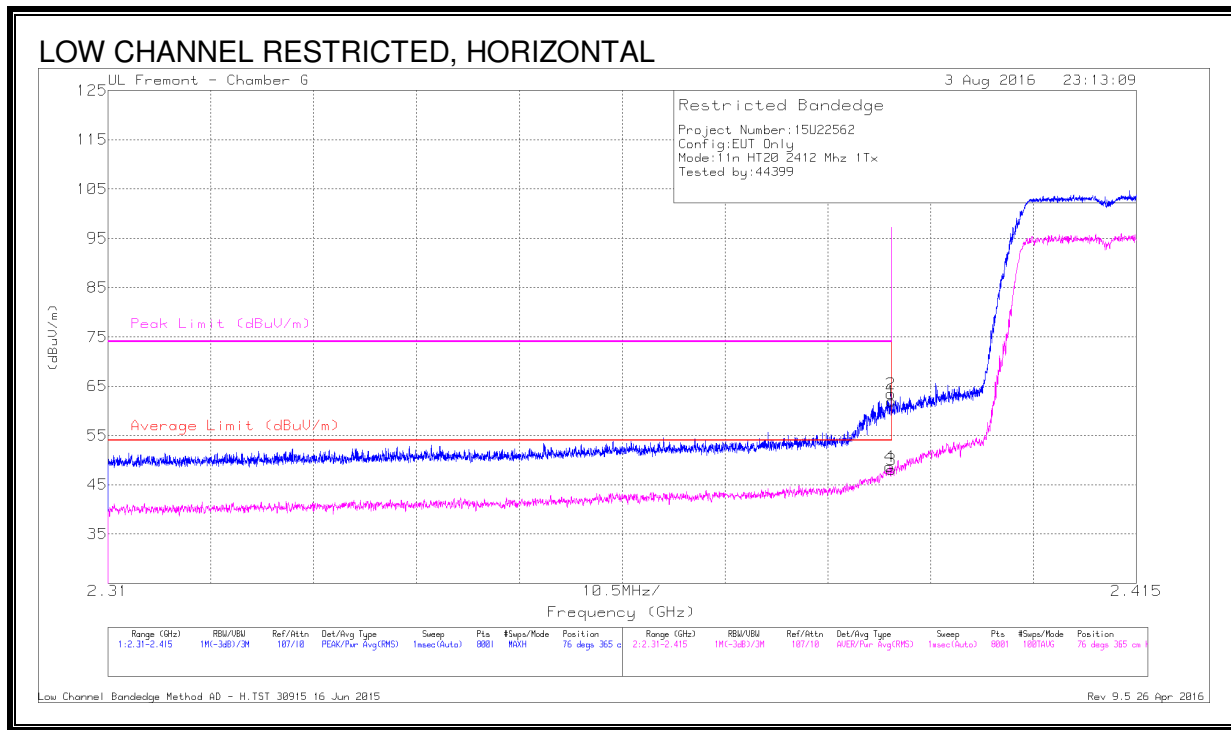

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Chl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.53	Pk	32.1	-23.7	61.93	-	-	74	-12.07	76	365	H
2	* 2.39	55.1	Pk	32.1	-23.7	63.5	-	-	74	-10.5	76	365	H
3	* 2.39	39.63	RMS	32.1	-23.7	48.03	54	-5.97	-	-	76	365	H
4	* 2.39	40.33	RMS	32.1	-23.7	48.73	54	-5.27	-	-	76	365	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

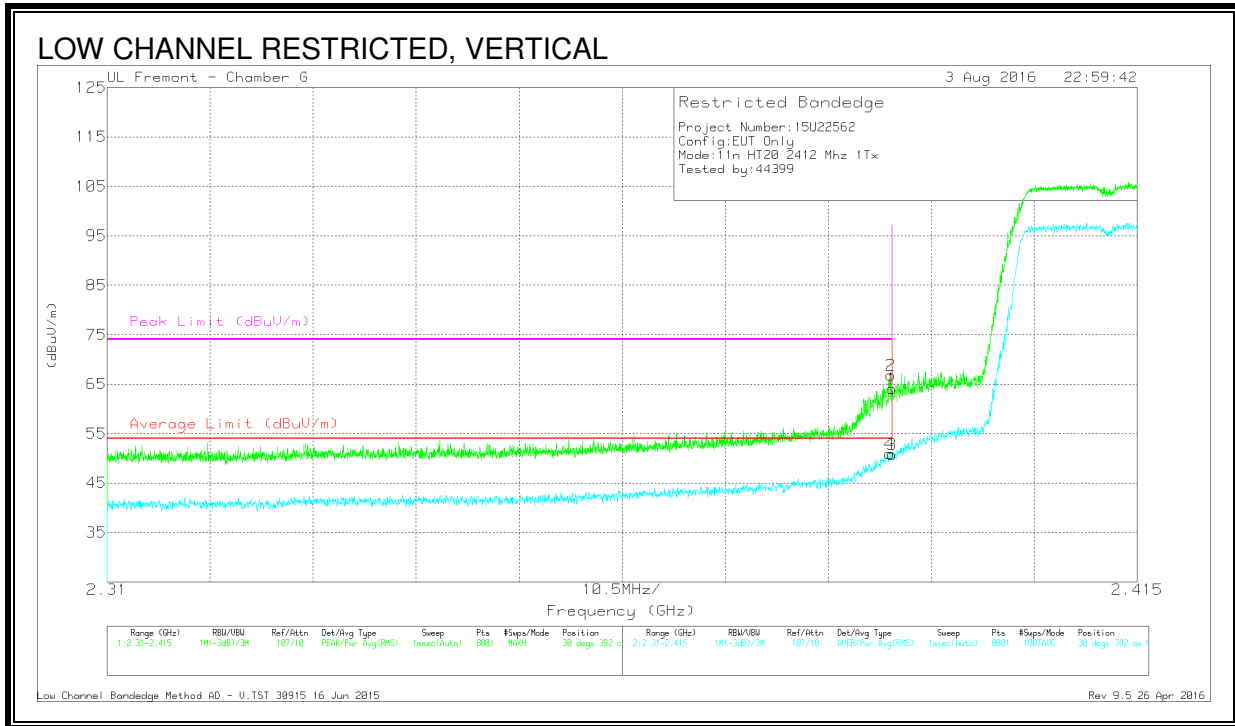


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cbi/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.63	Pk	32.1	-23.7	64.03	-	-	74	-9.97	30	392	V
2	* 2.39	58.39	Pk	32.1	-23.7	66.79	-	-	74	-7.21	30	392	V
3	* 2.39	42.34	RMS	32.1	-23.7	50.74	54	-3.26	-	-	30	392	V
4	* 2.39	42.56	RMS	32.1	-23.7	50.96	54	-3.04	-	-	30	392	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection


RESTRICTED BANDEGE (LOW CHANNEL, CH 2)

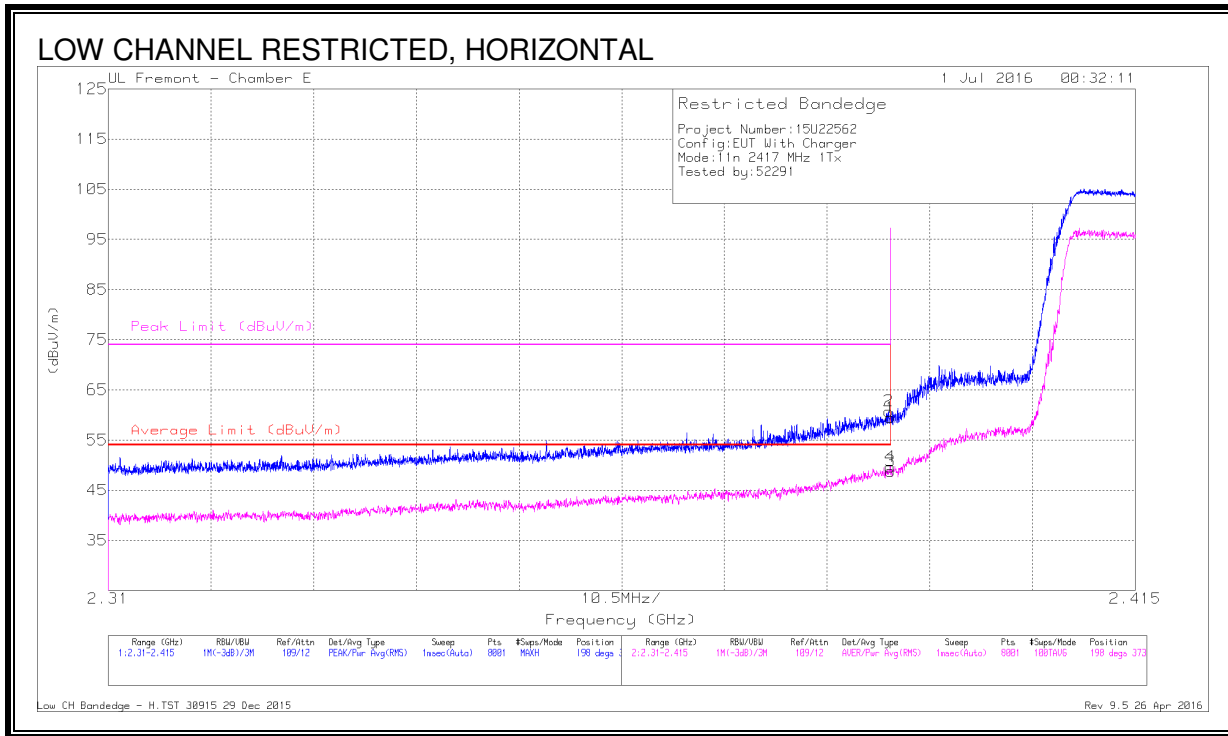

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Chl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.3	Pk	32.1	-19.9	59.5	-	-	74	-14.5	198	373	H
2	* 2.39	48.57	Pk	32.1	-19.9	60.77	-	-	74	-13.23	198	373	H
3	* 2.39	36.61	RMS	32.1	-19.9	48.81	54	-5.19	-	-	198	373	H
4	* 2.39	37.47	RMS	32.1	-19.9	49.67	54	-4.33	-	-	198	373	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

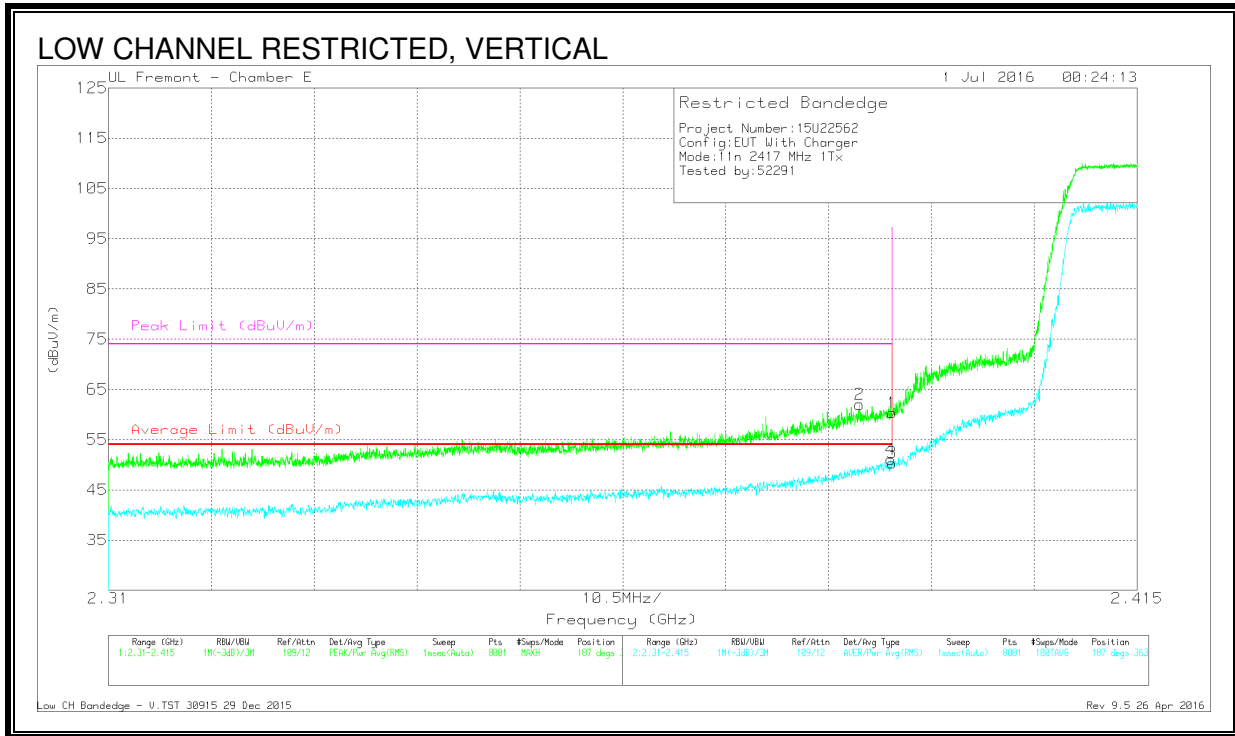

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb1/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.387	49.8	Pk	32.1	-19.9	62	-	-	74	-12	187	363	V
1	* 2.39	48.14	Pk	32.1	-19.9	60.34	-	-	74	-13.66	187	363	V
3	* 2.39	38.18	RMS	32.1	-19.9	50.38	54	-3.62	-	-	187	363	V
4	* 2.39	38.85	RMS	32.1	-19.9	51.05	54	-2.95	-	-	187	363	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL, CH 10)

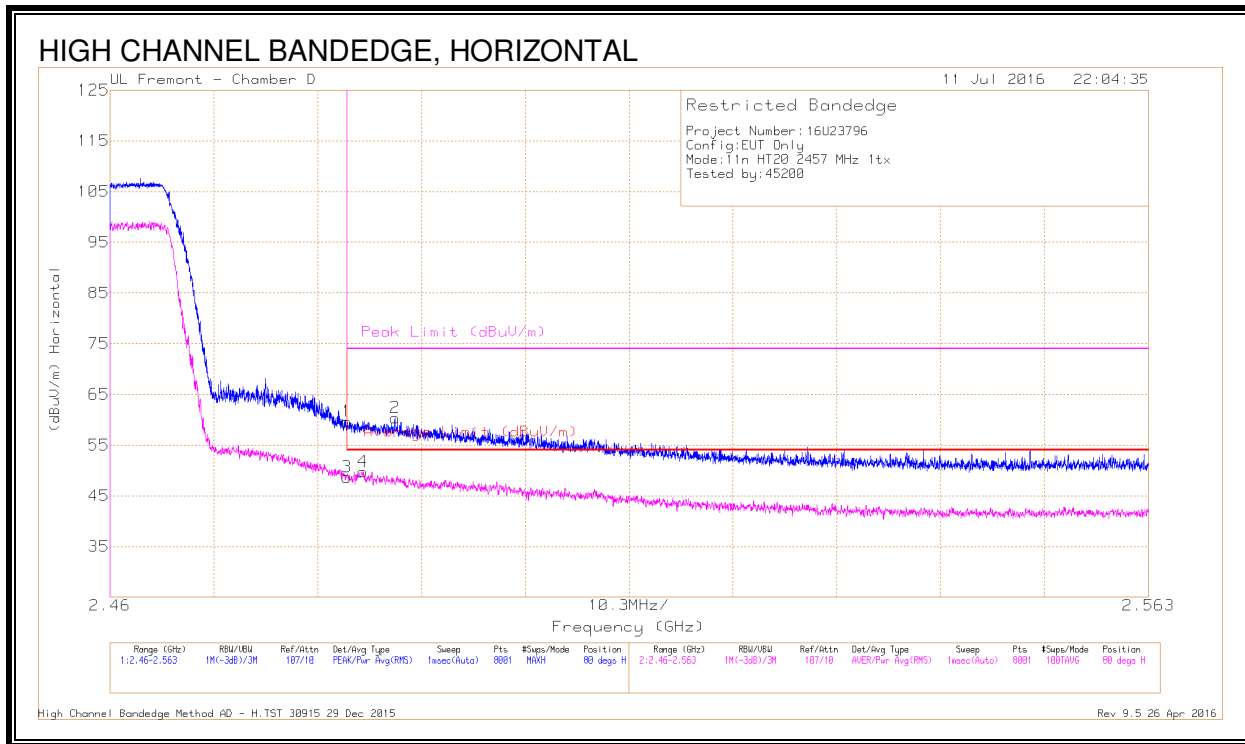


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.87	Pk	32.3	-20.5	59.67	-	-	74	-14.33	80	382	H
3	* 2.484	36.9	RMS	32.3	-20.5	48.7	54	-5.3	-	-	80	382	H
4	* 2.485	38.06	RMS	32.3	-20.6	49.76	54	-4.24	-	-	80	382	H
2	* 2.488	48.7	Pk	32.3	-20.6	60.4	-	-	74	-13.6	80	382	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

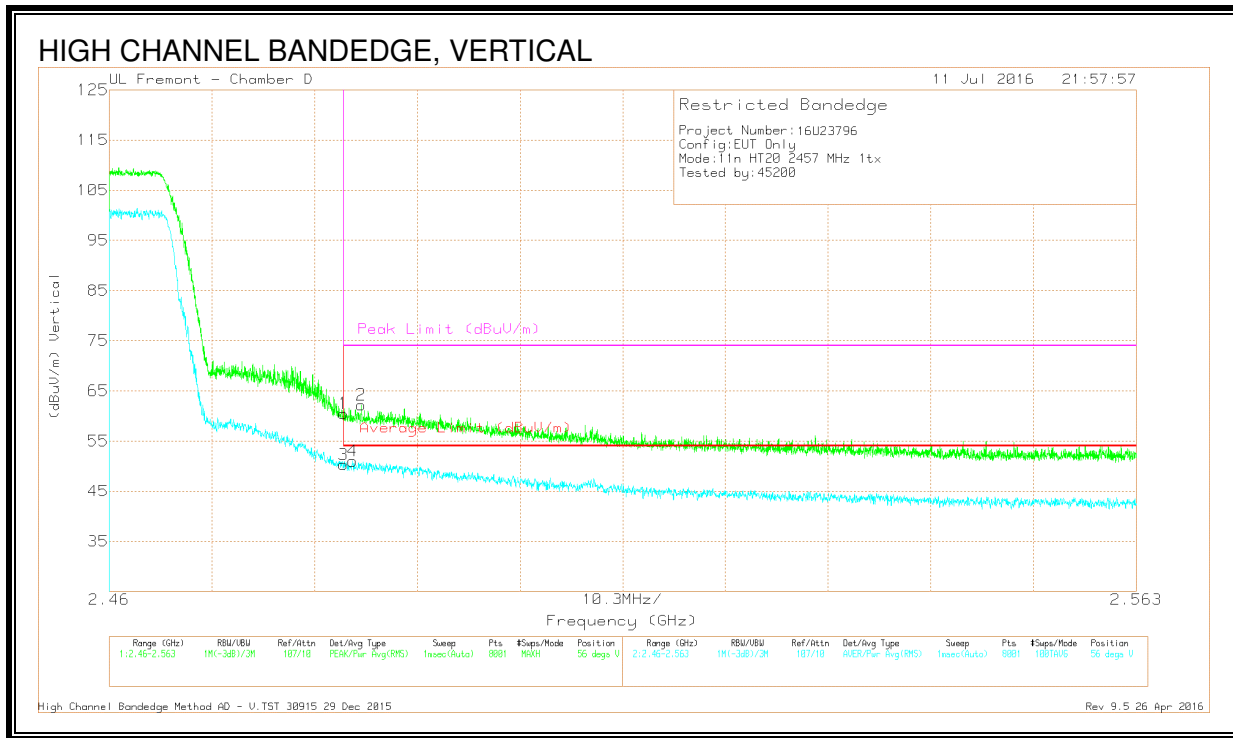

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.69	Pk	32.3	-20.5	60.49	-	-	74	-13.51	56	300	V
3	* 2.484	38.53	RMS	32.3	-20.5	50.33	54	-3.67	-	-	56	300	V
4	* 2.484	39.22	RMS	32.3	-20.5	51.02	54	-2.98	-	-	56	300	V
2	* 2.485	50.5	Pk	32.3	-20.6	62.2	-	-	74	-11.8	56	300	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


RESTRICTED BANDEGE (HIGH CHANNEL, CH 11)

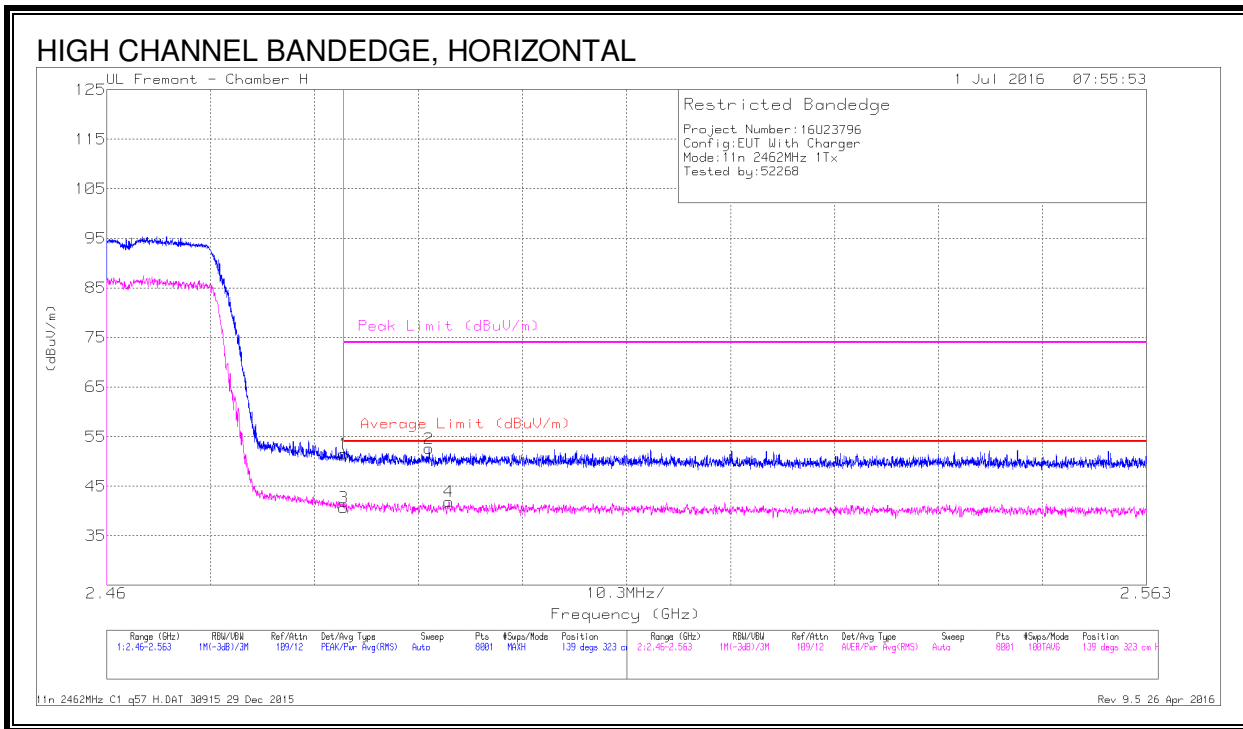

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT711 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.24	PK	32.3	-20	51.54	-	-	74	-22.46	139	323	H
2	* 2.492	40.38	PK	32.3	-20.1	52.58	-	-	74	-21.42	139	323	H
3	* 2.484	28.39	RMS	32.3	-20	40.69	54	-13.31	-	-	139	323	H
4	* 2.494	29.67	RMS	32.3	-20.1	41.87	54	-12.13	-	-	139	323	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

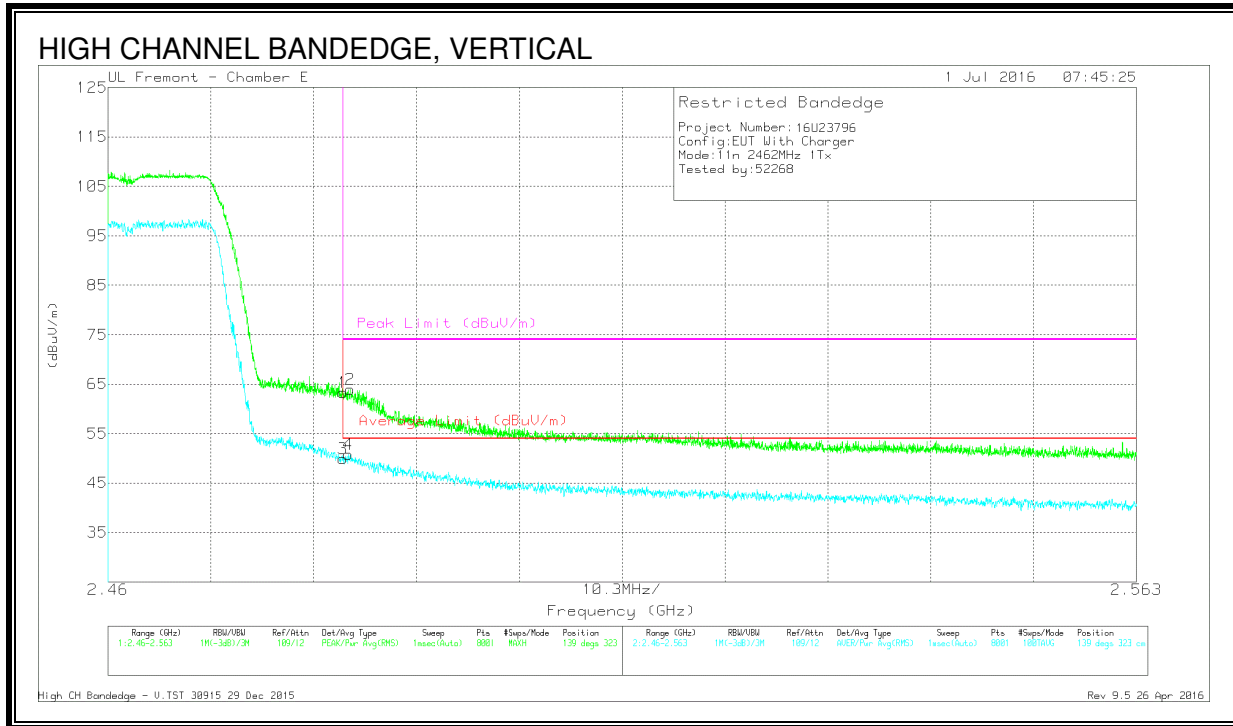


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fltr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.05	Pk	32.3	-20	63.35	-	-	74	-10.65	139	323	V
2	* 2.484	51.66	Pk	32.3	-20	63.96	-	-	74	-10.04	139	323	V
3	* 2.484	37.61	RMS	32.3	-20	49.91	54	-4.09	-	-	139	323	V
4	* 2.484	38.5	RMS	32.3	-20	50.8	54	-3.2	-	-	139	323	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL, CH 12)

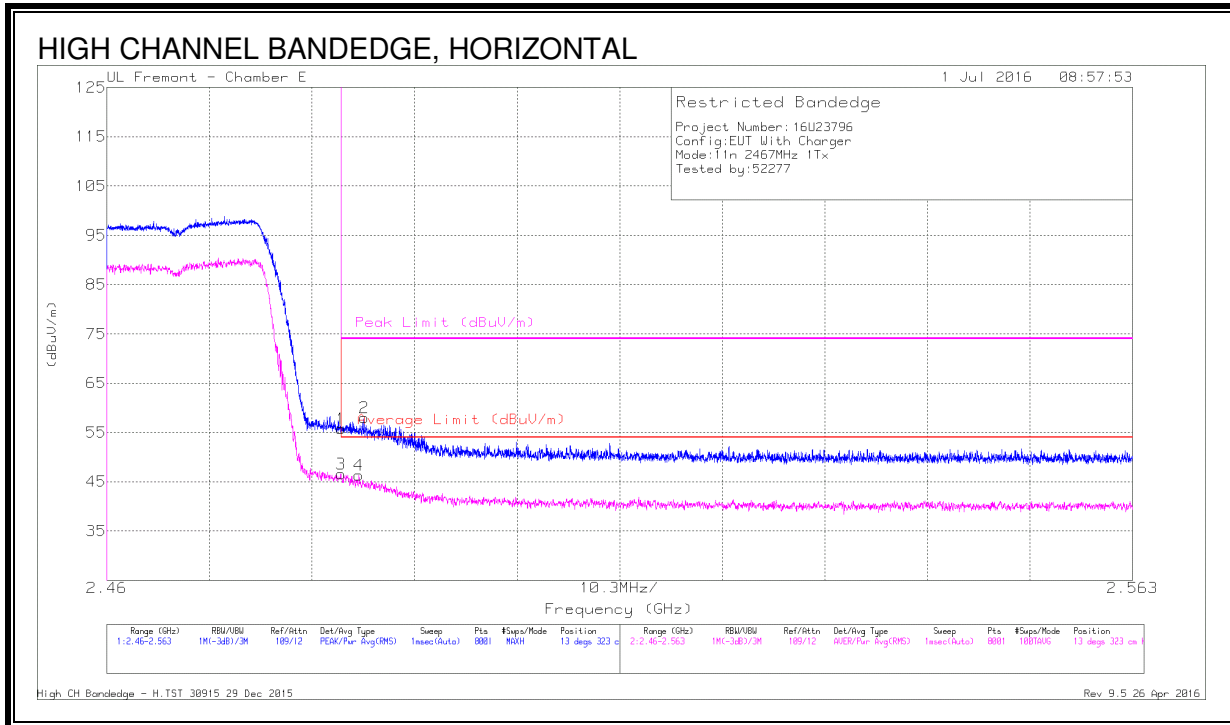


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb1/F1tr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.49	Pk	32.3	-20	55.79	-	-	74	-18.21	13	323	H
2	* 2.486	45.79	Pk	32.3	-20.1	57.99	-	-	74	-16.01	13	323	H
3	* 2.484	34.21	RMS	32.3	-20	46.51	54	-7.49	-	-	13	323	H
4	* 2.485	34.17	RMS	32.3	-20.1	46.37	54	-7.63	-	-	13	323	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

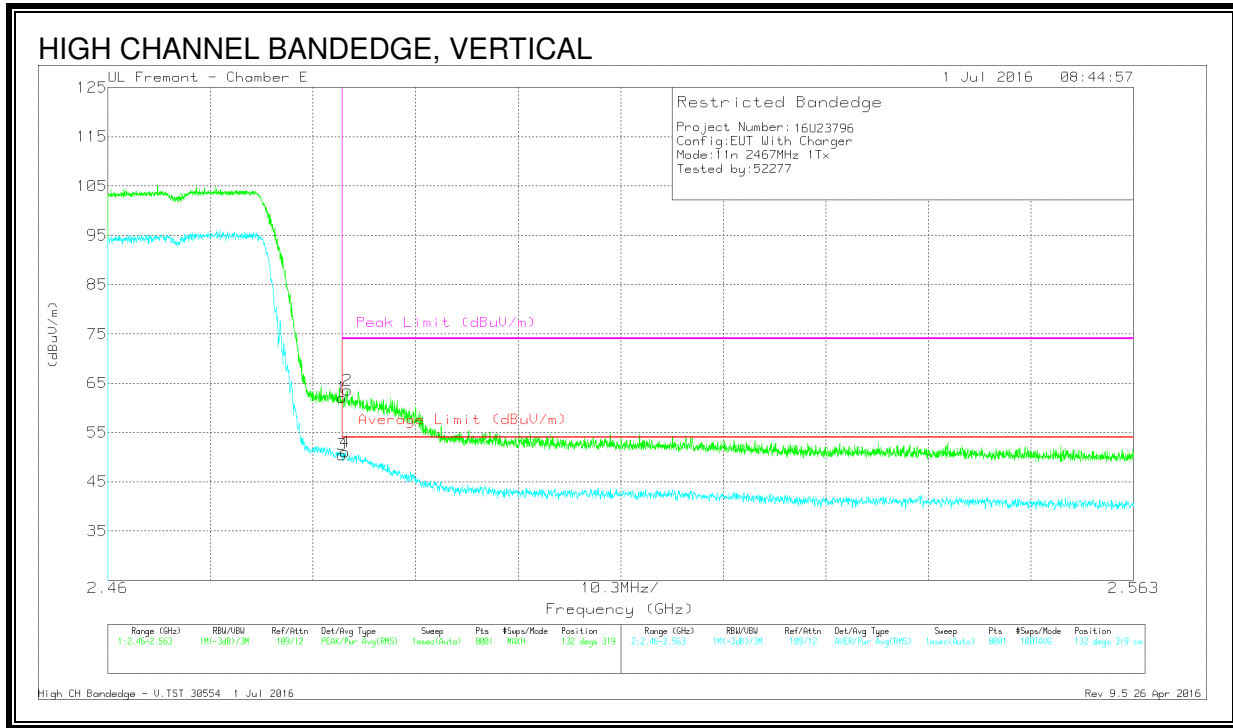


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Fltr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.75	Pk	32.3	-20	62.05	-	-	74	-11.95	132	319	V
2	* 2.484	51.29	Pk	32.3	-20	63.59	-	-	74	-10.41	132	319	V
3	* 2.484	38.18	RMS	32.3	-20	50.48	54	-3.52	-	-	132	319	V
4	* 2.484	38.71	RMS	32.3	-20	51.01	54	-2.99	-	-	132	319	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

RESTRICTED BANDEGE (HIGH CHANNEL, CH 13)

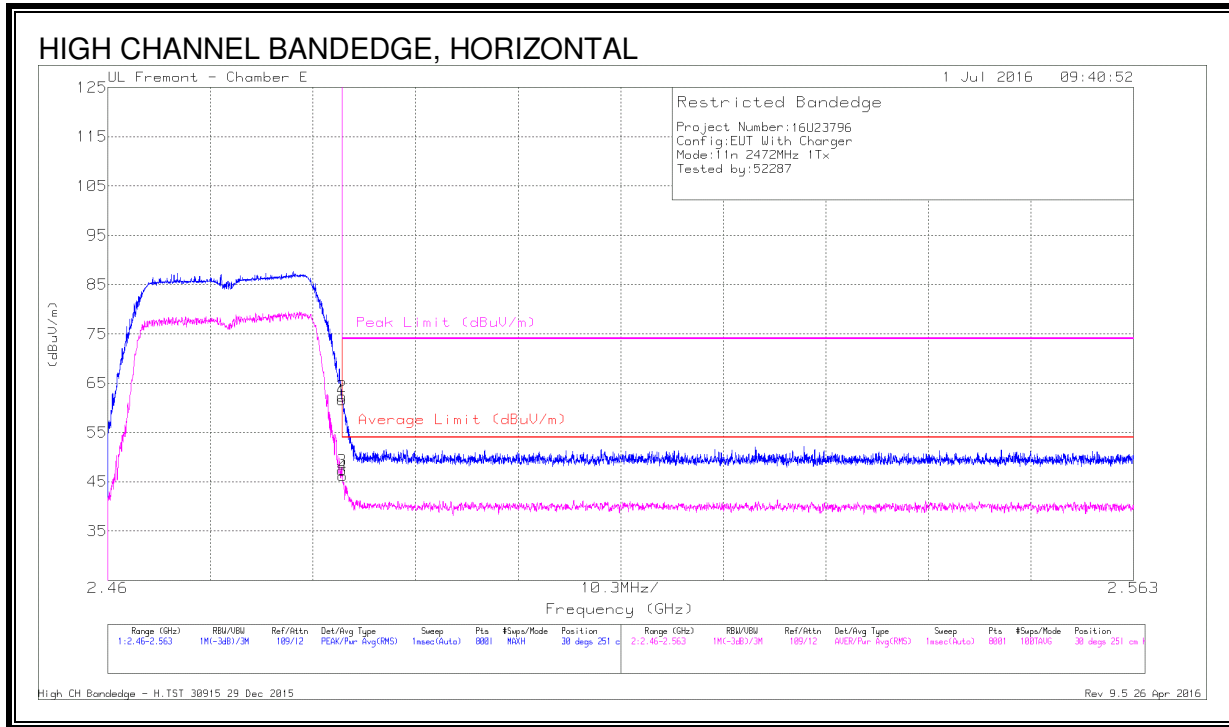


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.27	Pk	32.3	-20	61.57	-	-	74	-12.43	30	251	H
2	* 2.484	50.02	Pk	32.3	-20	62.32	-	-	74	-11.68	30	251	H
3	* 2.484	35.03	RMS	32.3	-20	47.33	54	-6.67	-	-	30	251	H
4	* 2.484	33.84	RMS	32.3	-20	46.14	54	-7.86	-	-	30	251	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

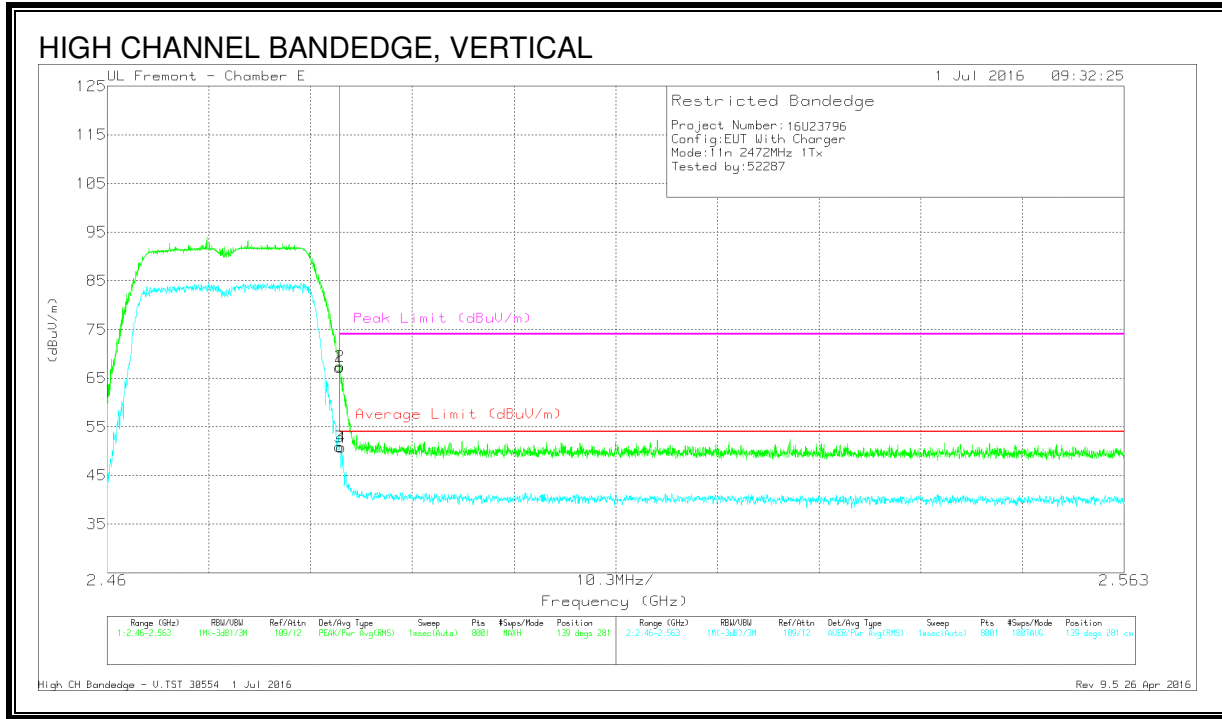

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.94	Pk	32.3	-20	67.24	-	-	74	-6.76	139	281	V
2	* 2.484	55.1	Pk	32.3	-20	67.4	-	-	74	-6.6	139	281	V
3	* 2.484	38.62	RMS	32.3	-20	50.92	54	-3.08	-	-	139	281	V
4	* 2.484	38.52	RMS	32.3	-20	50.82	54	-3.18	-	-	139	281	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 1)

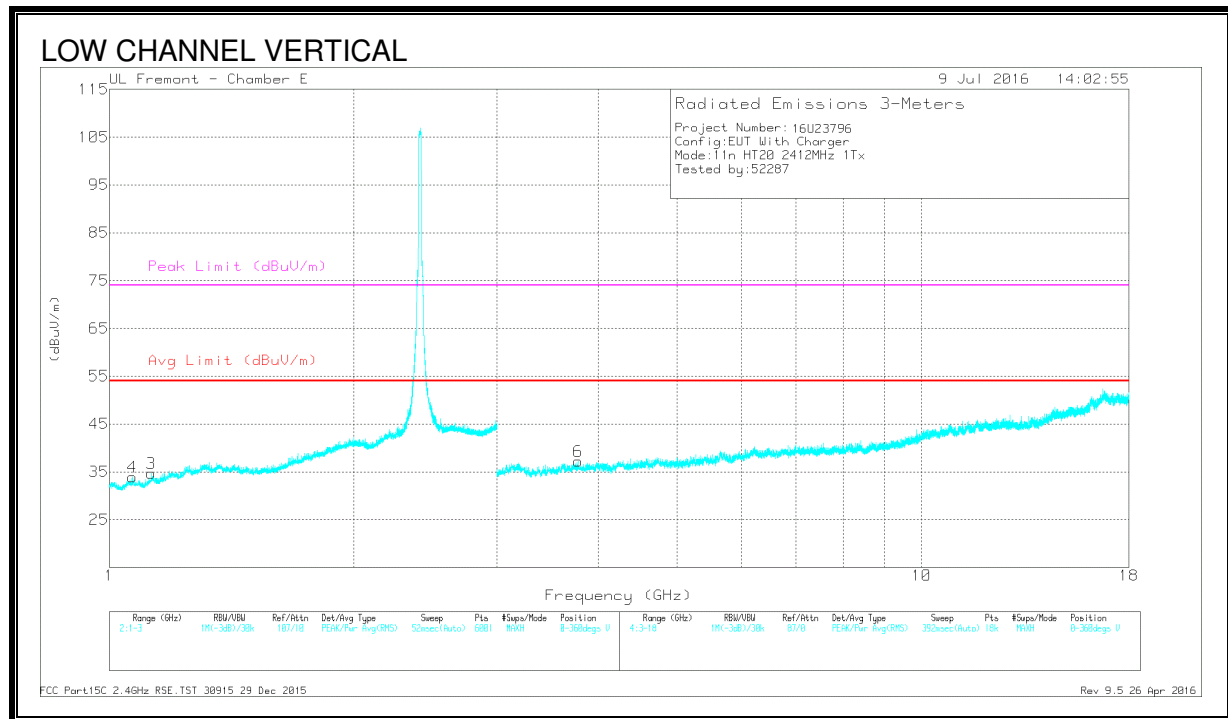
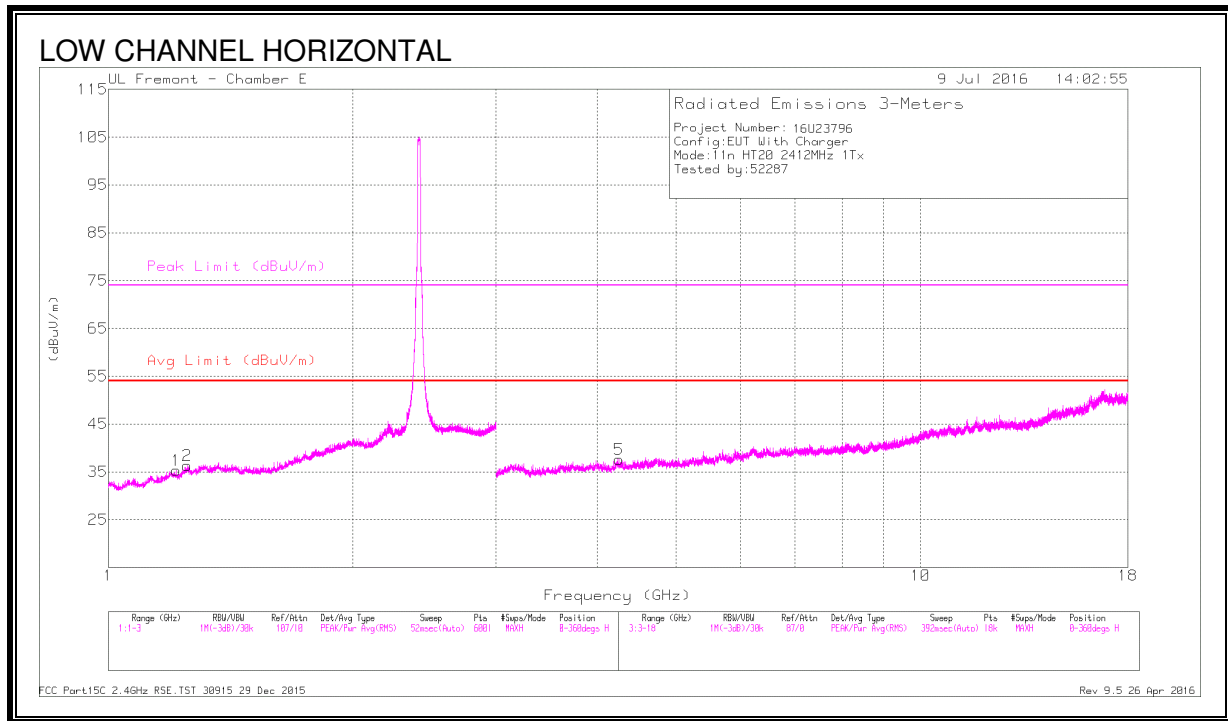


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
	* 1.21	35.91	PK2	28.6	-22.9	41.61	-	-	74	-32.39	61	212	H
1	* 1.213	24.5	MAv1	28.7	-22.9	30.3	54	-23.7	-	-	61	212	H
2	* 1.251	36.22	PK2	29	-22.6	42.62	-	-	74	-31.38	106	221	H
	* 1.251	25.13	MAv1	29	-22.6	31.53	54	-22.47	-	-	106	221	H
	* 1.125	36.28	PK2	27.9	-23.4	40.78	-	-	74	-33.22	216	368	V
3	* 1.127	25.32	MAv1	27.9	-23.4	29.82	54	-24.18	-	-	216	368	V
4	* 1.068	37.28	PK2	27.6	-23.9	40.98	-	-	74	-33.02	328	316	V
	* 1.066	25.37	MAv1	27.6	-23.9	29.07	54	-24.93	-	-	328	316	V
5	* 4.254	39.06	PK2	33.3	-29	43.36	-	-	74	-30.64	23	323	H
	* 4.256	28.48	MAv1	33.3	-29	32.78	54	-21.22	-	-	23	323	H
	* 3.773	40.69	PK2	33.1	-30.3	43.49	-	-	74	-30.51	107	331	V
6	* 3.776	29.59	MAv1	33.1	-30.4	32.29	54	-21.71	-	-	107	331	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, CH 2)

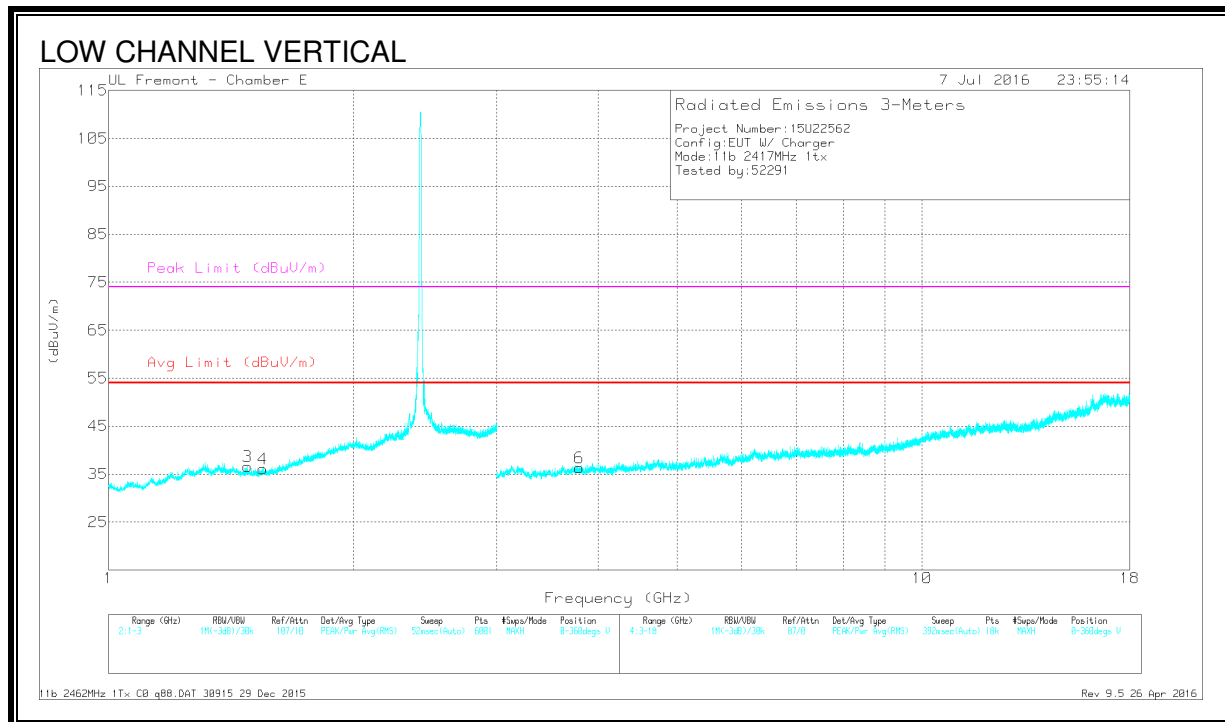
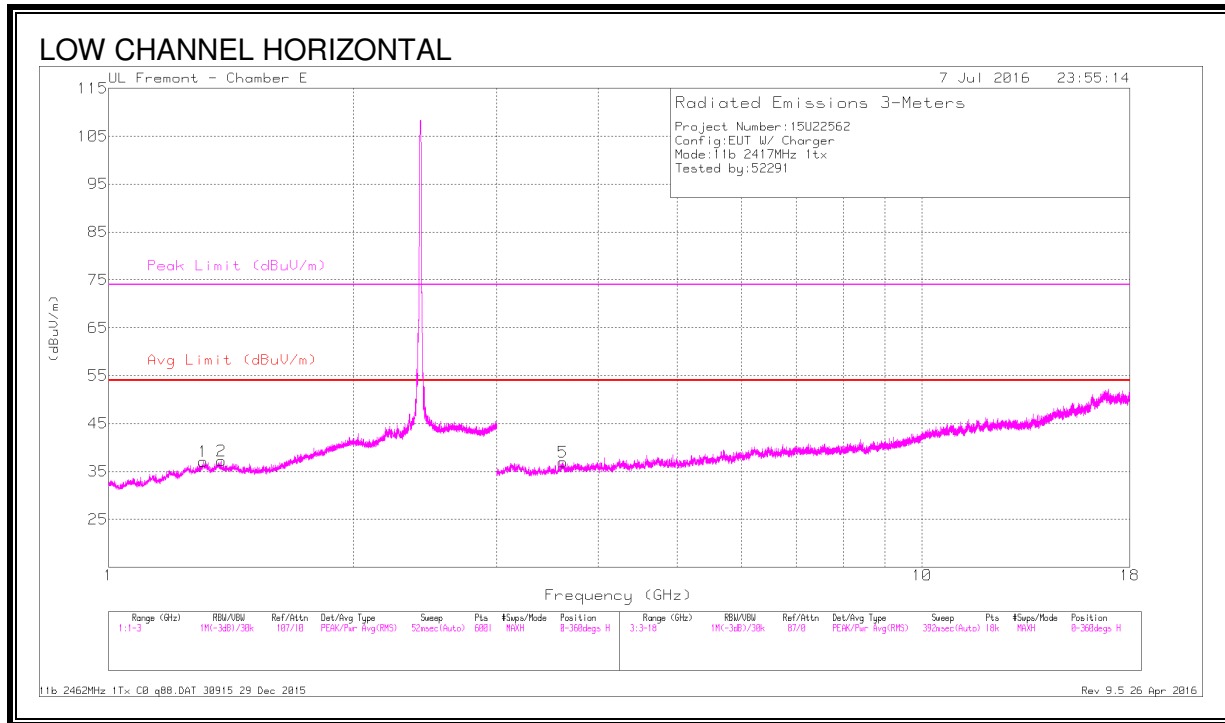


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.308	36.78	PK2	29.3	-22.4	43.68	-	-	74	-30.32	289	263	H
	* 1.308	25.35	MAv1	29.3	-22.4	32.25	54	-21.75	-	-	289	263	H
2	* 1.376	36.82	PK2	29.1	-22.2	43.72	-	-	74	-30.28	216	154	H
	* 1.379	25.49	MAv1	29.1	-22.2	32.39	54	-21.61	-	-	216	154	H
3	* 1.482	36.35	PK2	28	-21.6	42.75	-	-	74	-31.25	53	237	V
	* 1.481	25.6	MAv1	28	-21.6	32	54	-22	-	-	53	237	V
4	* 1.481	37.66	PK2	28	-21.6	44.06	-	-	74	-29.94	83	190	V
	* 1.481	25.9	MAv1	28	-21.6	32.3	54	-21.7	-	-	83	190	V
5	* 3.618	40.77	PK2	33	-30.5	43.27	-	-	74	-30.73	130	255	H
	* 3.62	30.63	MAv1	33	-30.5	33.13	54	-20.87	-	-	130	255	H
6	* 3.789	40.69	PK2	33.1	-30.6	43.19	-	-	74	-30.81	255	278	V
	* 3.788	29.76	MAv1	33.1	-30.6	32.26	54	-21.74	-	-	255	278	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 6)

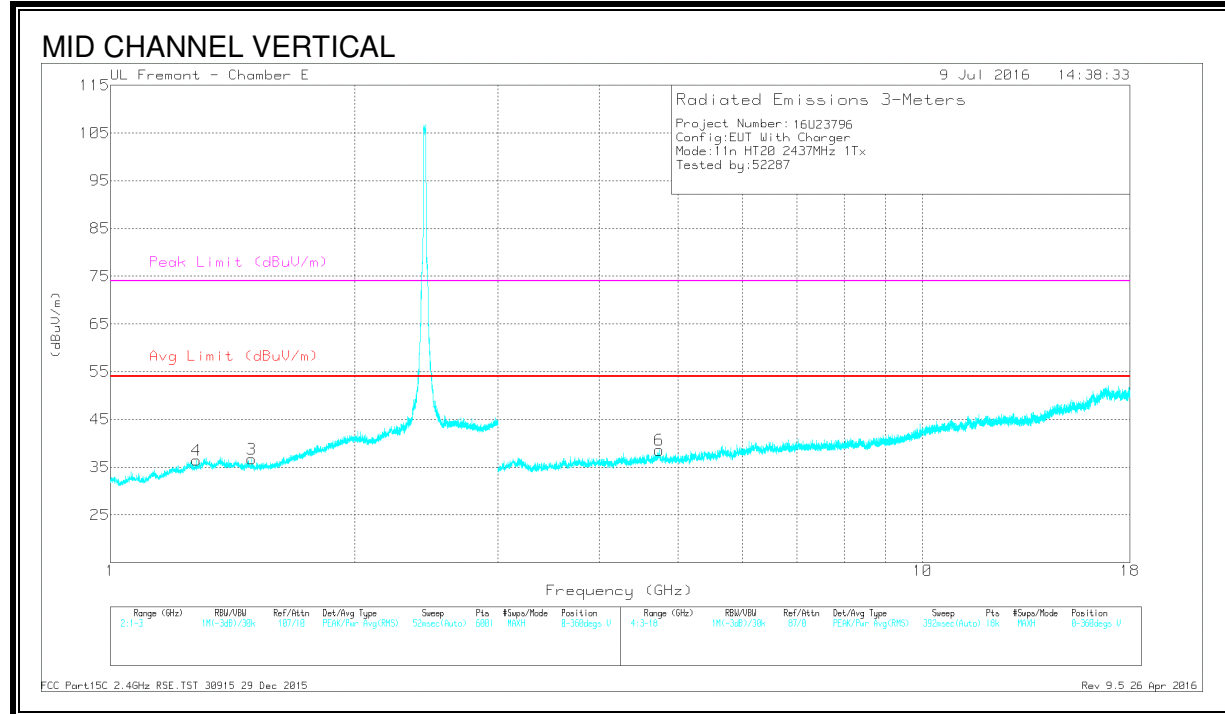
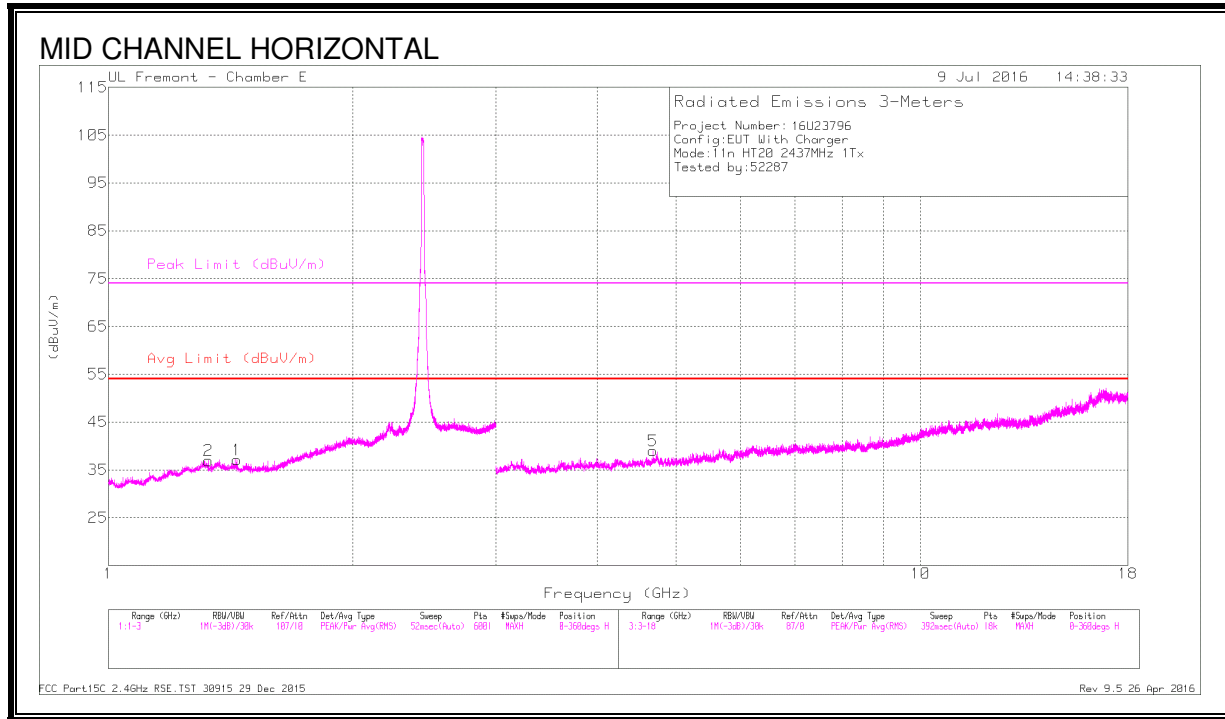


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.438	36.43	PK2	28.5	-21.7	43.23	-	-	74	-30.77	212	284	H
	* 1.437	24.78	MAv1	28.6	-21.7	31.68	54	-22.32	-	-	212	284	H
	* 1.326	36.37	PK2	29.3	-22.3	43.37	-	-	74	-30.63	136	221	H
2	* 1.329	24.79	MAv1	29.3	-22.3	31.79	54	-22.21	-	-	136	221	H
3	* 1.493	36.61	PK2	27.8	-21.6	42.81	-	-	74	-31.19	48	293	V
	* 1.49	25.14	MAv1	27.8	-21.6	31.34	54	-22.66	-	-	48	293	V
	* 1.274	35.65	PK2	29.1	-22.6	42.15	-	-	74	-31.85	176	221	V
4	* 1.277	24.67	MAv1	29.2	-22.5	31.37	54	-22.63	-	-	176	221	V
5	* 4.683	40.73	PK2	34	-29.8	44.93	-	-	74	-29.07	309	206	H
	* 4.681	29.24	MAv1	34	-29.8	33.44	54	-20.56	-	-	309	206	H
	* 4.741	39.93	PK2	34	-29.1	44.83	-	-	74	-29.17	231	286	V
6	* 4.74	29.15	MAv1	34	-29.1	34.05	54	-19.95	-	-	231	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 11)

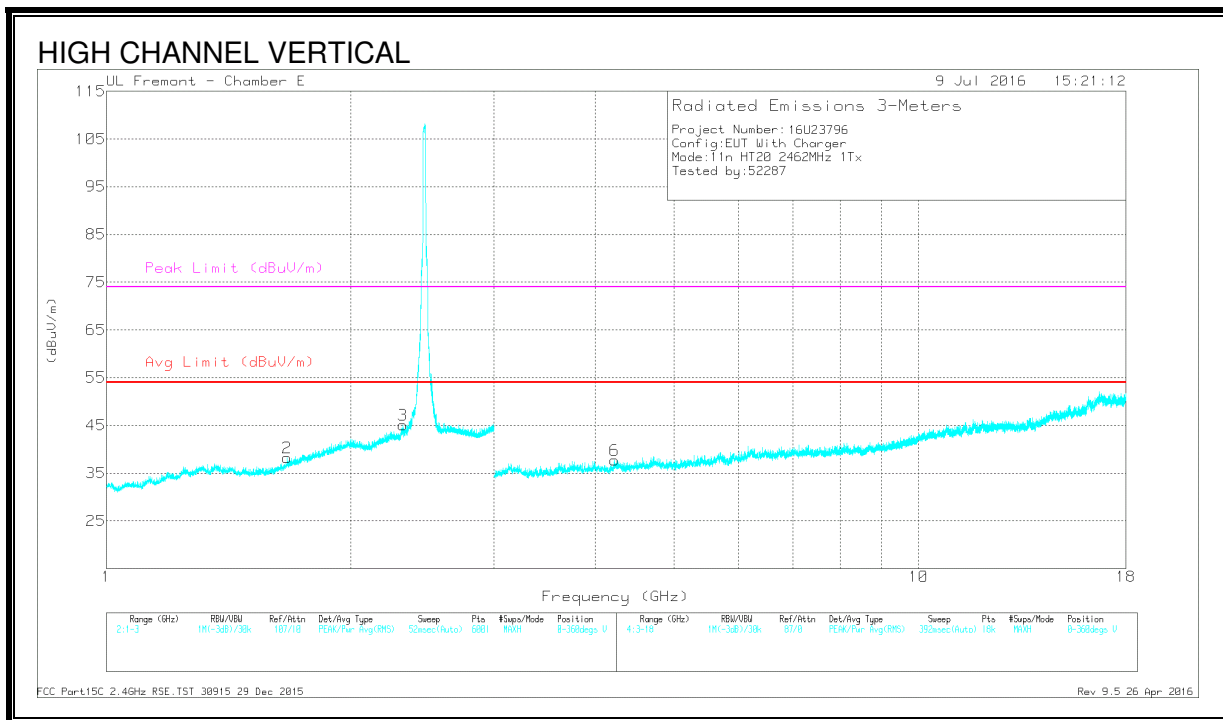
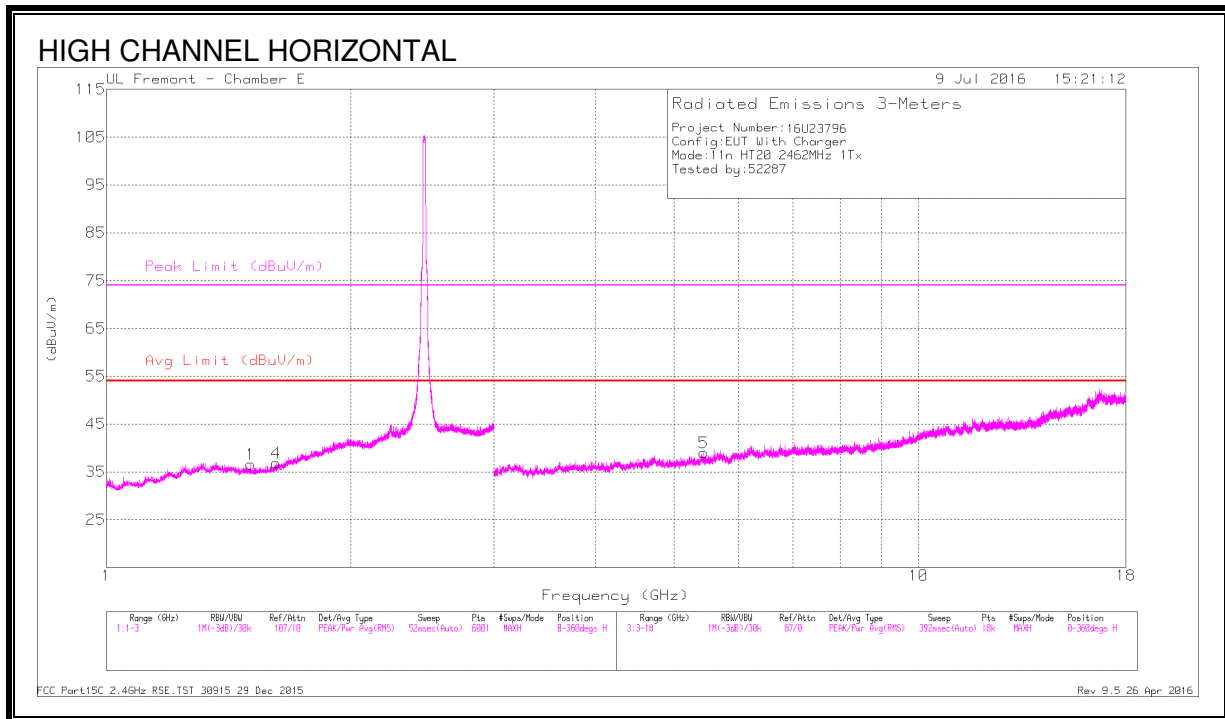


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.506	36.54	PK2	27.7	-21.5	42.74	-	-	74	-31.26	156	161	H
	* 1.507	24.91	MAv1	27.7	-21.5	31.11	54	-22.89	-	-	156	161	H
4	* 1.619	36.27	PK2	28.1	-21.5	42.87	-	-	74	-31.13	341	254	H
	* 1.62	25.28	MAv1	28.1	-21.5	31.88	54	-22.12	-	-	341	254	H
	* 1.67	36.57	PK2	28.8	-21.1	44.27	-	-	74	-29.73	52	339	V
2	* 1.668	25.26	MAv1	28.7	-21.1	32.86	54	-21.14	-	-	52	339	V
	* 2.315	43.65	PK2	31.6	-20.2	55.05	-	-	74	-18.95	190	390	V
3	* 2.315	31.4	MAv1	31.6	-20.2	42.8	54	-11.2	-	-	190	390	V
5	* 5.434	39.95	PK2	34.4	-30	44.35	-	-	74	-29.65	75	102	H
	* 5.433	29.42	MAv1	34.4	-30	33.82	54	-20.18	-	-	75	102	H
	* 4.223	39.24	PK2	33.3	-29.1	43.44	-	-	74	-30.56	213	301	V
6	* 4.224	28.78	MAv1	33.3	-29.1	32.98	54	-21.02	-	-	213	301	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 12)

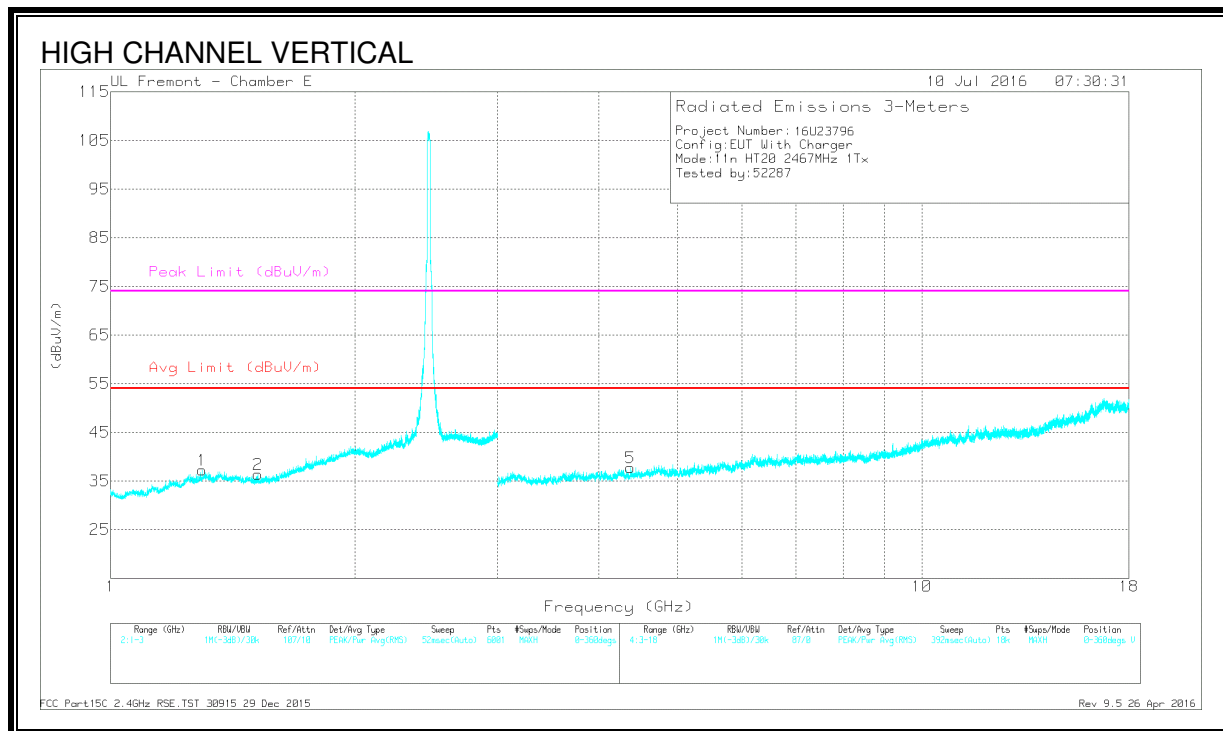
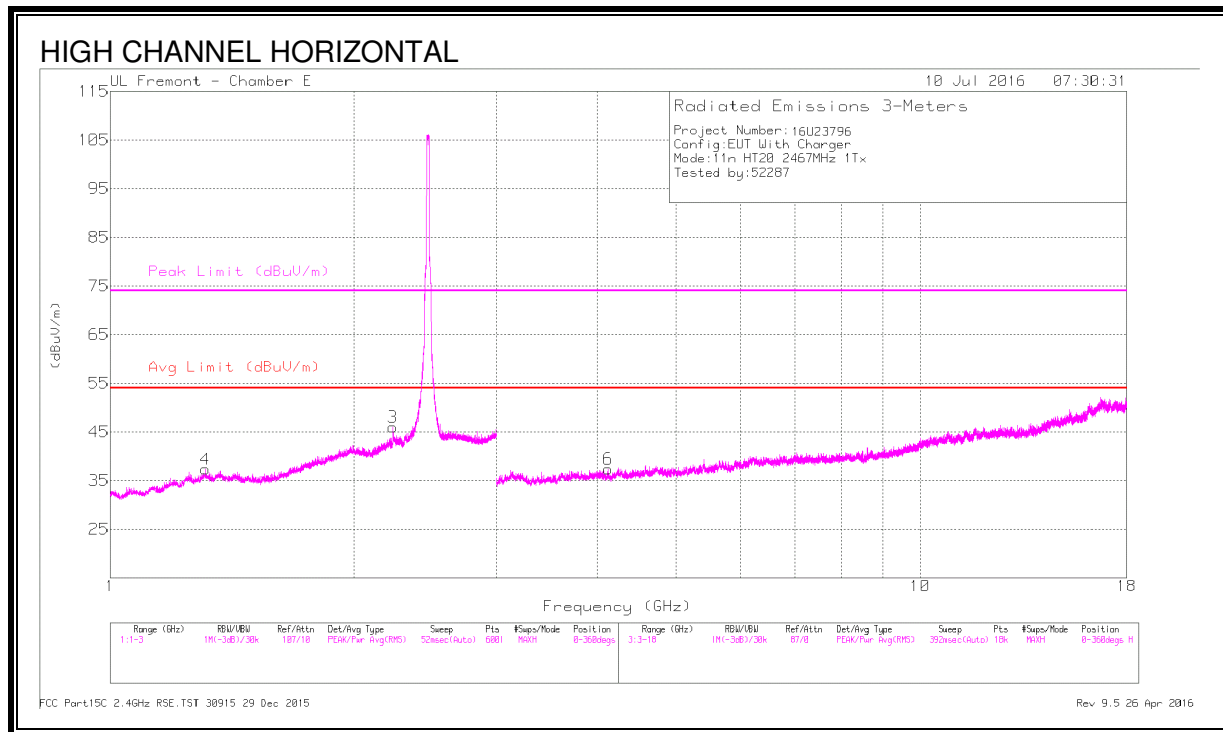


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 1.311	36.4	PK2	29.3	-22.4	43.3	-	-	74	-30.7	163	269	H
	* 1.311	25.41	MAv1	29.3	-22.4	32.31	54	-21.69	-	-	163	269	H
3	* 2.235	40.25	PK2	31.7	-20	51.95	-	-	74	-22.05	32	159	H
	* 2.235	29.08	MAv1	31.7	-20	40.78	54	-13.22	-	-	32	159	H
1	* 1.295	36.47	PK2	29.3	-22.5	43.27	-	-	74	-30.73	239	132	V
	* 1.298	24.91	MAv1	29.3	-22.6	31.61	54	-22.39	-	-	239	132	V
	* 1.52	36.39	PK2	27.7	-21.4	42.69	-	-	74	-31.31	271	188	V
2	* 1.518	24.97	MAv1	27.7	-21.4	31.27	54	-22.73	-	-	271	188	V
6	* 4.119	40.42	PK2	33.4	-30.8	43.02	-	-	74	-30.98	0	256	H
	* 4.119	29.83	MAv1	33.4	-30.8	32.43	54	-21.57	-	-	90	355	H
5	* 4.372	40.68	PK2	33.7	-30.8	43.58	-	-	74	-30.42	60	231	V
	* 4.372	30.07	MAv1	33.7	-30.8	32.97	54	-21.03	-	-	60	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, CH 13)

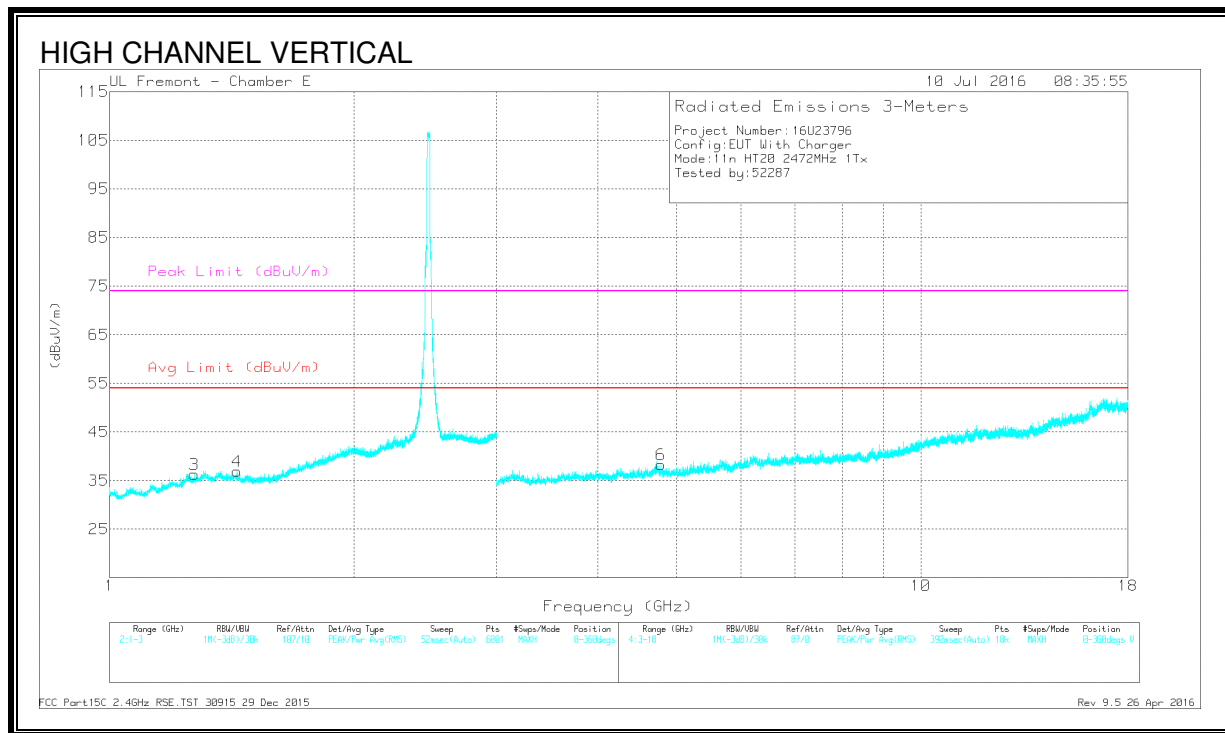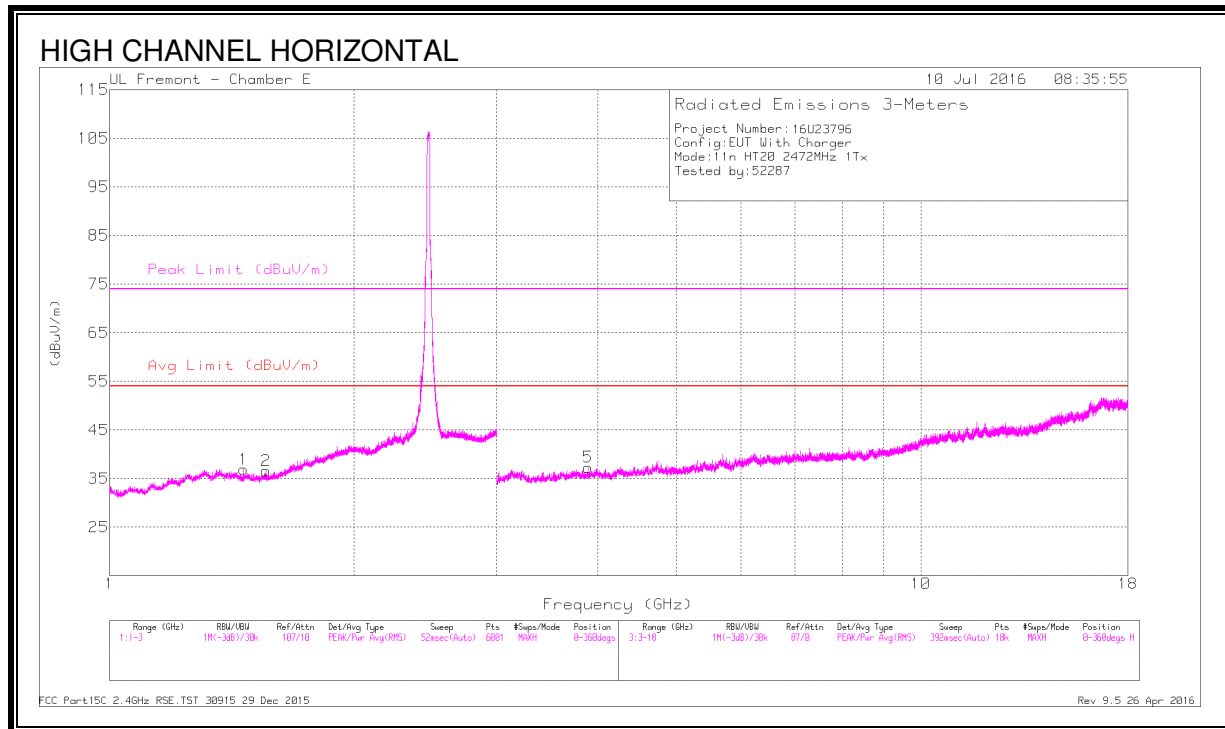


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cb/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.463	36.31	PK2	28.2	-21.8	42.71	-	-	74	-31.29	124	291	H
	* 1.465	24.77	MAv1	28.2	-21.7	31.27	54	-22.73	-	-	124	291	H
	* 1.561	37	PK2	27.8	-21.5	43.3	-	-	74	-30.7	217	379	H
2	* 1.56	24.99	MAv1	27.8	-21.4	31.39	54	-22.61	-	-	217	379	H
4	* 1.367	36.48	PK2	29.1	-22.2	43.38	-	-	74	-30.62	151	273	V
	* 1.661	25.38	MAv1	28.6	-21.2	32.78	54	-21.22	-	-	151	273	V
3	* 1.272	36.16	PK2	29.1	-22.6	42.66	-	-	74	-31.34	189	194	V
	* 1.272	24.77	MAv1	29.1	-22.6	31.27	54	-22.73	-	-	189	194	V
	* 3.889	40.97	PK2	33.3	-30.5	43.77	-	-	74	-30.23	255	130	H
5	* 3.889	29.68	MAv1	33.3	-30.5	32.48	54	-21.52	-	-	255	130	H
	* 4.783	39.46	PK2	34	-29.4	44.06	-	-	74	-29.94	333	215	V
6	* 4.782	28.74	MAv1	34	-29.4	33.34	54	-20.66	-	-	333	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

9.7. 802.11n HT20 2Tx MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEGE (LOW CHANNEL, CH 1)

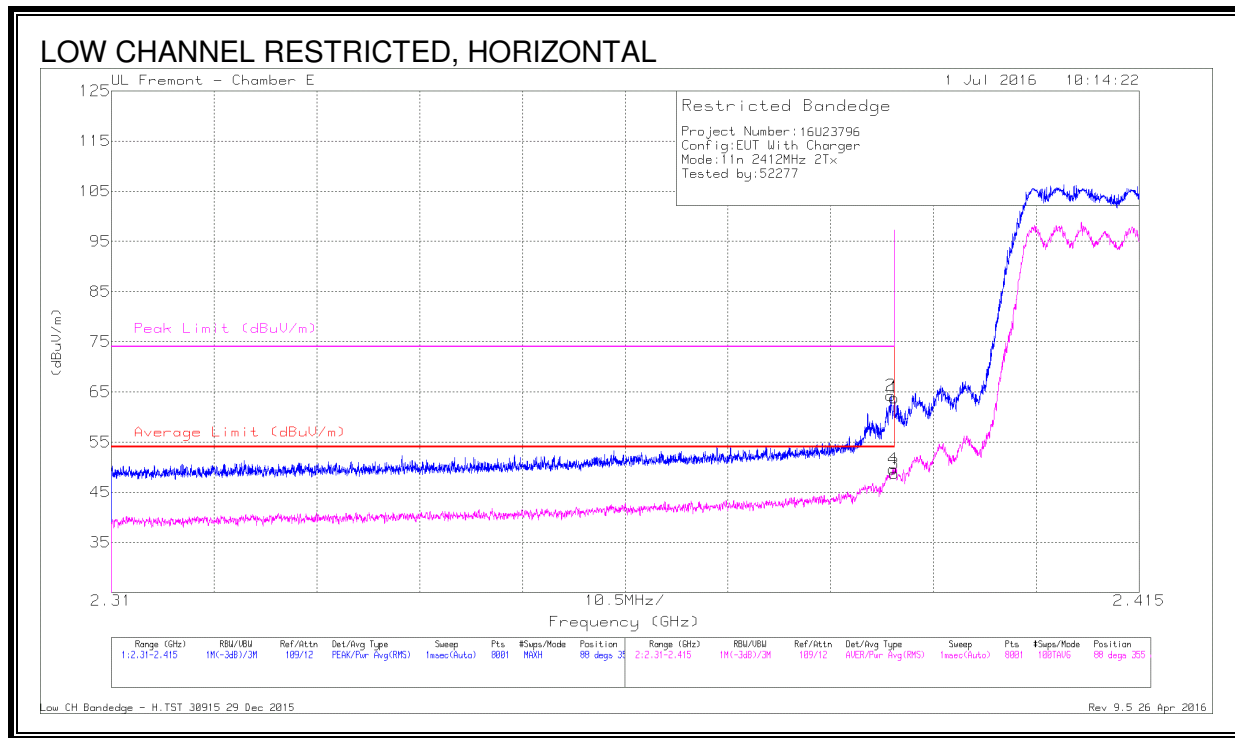


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	51.63	Pk	32.1	-19.9	63.83	-	-	74	-10.17	88	355	H
2	* 2.39	52.1	Pk	32.1	-19.9	64.3	-	-	74	-9.7	88	355	H
3	* 2.39	36.52	RMS	32.1	-19.9	48.72	54	-5.28	-	-	88	355	H
4	* 2.39	37.43	RMS	32.1	-19.9	49.63	54	-4.37	-	-	88	355	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

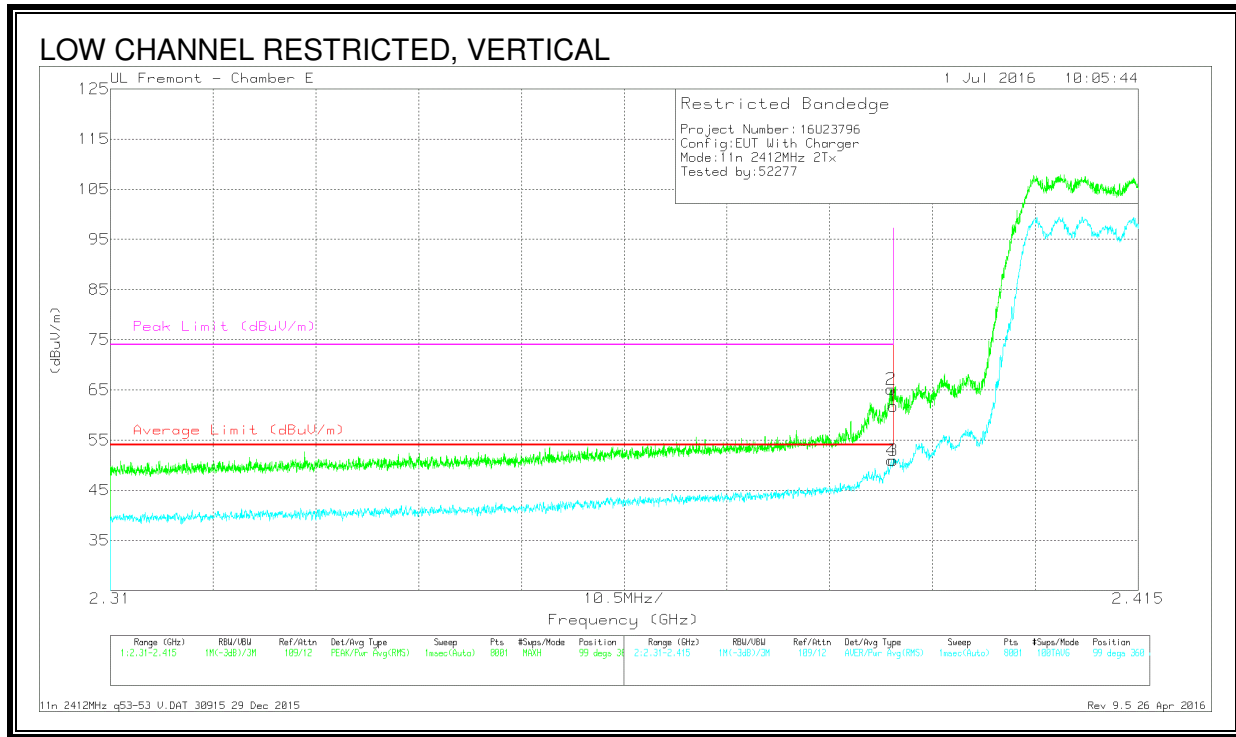

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T711 (dB/m)	Amp/Chl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.56	Pk	32.1	-19.9	61.76	-	-	74	-12.24	99	360	V
2	* 2.39	52.96	Pk	32.1	-19.9	65.16	-	-	74	-8.84	99	360	V
3	* 2.39	38.77	RMS	32.1	-19.9	50.97	54	-3.03	-	-	99	360	V
4	* 2.39	38.71	RMS	32.1	-19.9	50.91	54	-3.09	-	-	99	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection