



TEST REPORT

Test Report No. : UL-RPT-RP12185759JD08B

Customer : Apple Inc.
Model No. : A1990
FCC ID : BCGA1990
Technology : *Bluetooth* – Low Energy
Test Standard(s) : FCC Parts 15.209(a) & 15.247

Test Laboratory : UL VS LTD, Basingstoke, Hampshire, RG24 8AH, United Kingdom

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0.

Date of Issue: 27 June 2018

Checked by:

Ben Mercer
Senior Test Engineer, Radio Laboratory

Company Signatory:

Sarah Williams
Senior Test Engineer, Radio Laboratory
UL VS LTD



The *Bluetooth*[®] word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL VS LTD is under licence. Other trademarks and trade names are those of their respective owners.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

Customer Information

Company Name:	Apple Inc.
Address:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	27/06/2018	Initial Version	Ben Mercer

Table of Contents

Customer Information.....	2
Report Revision History	2
Table of Contents.....	3
1. Attestation of Test Results.....	4
1.1. Description of EUT	4
1.2. General Information	4
1.3. Summary of Test Results	4
1.4. Deviations from the Test Specification	4
2. Summary of Testing.....	5
2.1. Facilities and Accreditation	5
2.2. Methods and Procedures	5
2.3. Calibration and Uncertainty	6
2.4. Test and Measurement Equipment	7
3. Equipment Under Test (EUT)	8
3.1. Identification of Equipment Under Test (EUT)	8
3.2. Modifications Incorporated in the EUT	8
3.3. Additional Information Related to Testing	9
3.4. Description of Available Antennas	9
3.5. Description of Test Setup	10
4. Antenna Port Test Results	13
4.1. Transmitter Minimum 6 dB Bandwidth	13
4.2. Transmitter Duty Cycle	16
4.3. Transmitter Maximum Peak Output Power	17
5. Radiated Test Results.....	22
5.1. Transmitter Radiated Emissions <1 GHz	22
5.2. Transmitter Radiated Emissions >1 GHz	24
5.3. Transmitter Band Edge Radiated Emissions	26

1. Attestation of Test Results

1.1. Description of EUT

The equipment under test was a Laptop Computer with WLAN and *Bluetooth*.

1.2. General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.209
Test Dates:	14 January 2018 to 01 June 2018

1.3. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.247(a)(2)	Transmitter Minimum 6 dB Bandwidth	Complied
Part 15.35(c)	Transmitter Duty Cycle	Note 1
Part 15.247(b)(3)	Transmitter Maximum Peak Output Power	Complied
Part 15.247(e)	Transmitter Power Spectral Density	Note 2
Part 15.247(d)/15.209(a)	Transmitter Radiated Emissions	Complied
Part 15.247(d)/15.209(a)	Transmitter Band Edge Radiated Emissions	Complied

Note(s):

1. The measurement was performed to assist in the calculation of the level of average radiated emissions at the upper band edge.
2. In accordance with FCC KDB 558074 Section 10.1, PSD measurements are not required if the maximum conducted output power is less than the PSD limit of 8 dBm / 3 kHz. The PSD level is therefore deemed to be equal to the measured output power.
3. There are two vendors of the WiFi/*Bluetooth* radio modules, Vendor 1 and Vendor 2.

The WiFi/*Bluetooth* radio modules have the same mechanical outline (i.e. the same packaging dimension and pin layout), use the same on-board antenna matching circuit, have an identical antenna structure and are built and tested to conform to the same specification and to operate within the same tolerances.

Baseline testing was performed on the two vendors to determine the worst case.

1.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

2. Summary of Testing

2.1. Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	
Site 2	
Site 17	X

UL VS LTD is accredited by UKAS. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017
Title:	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247

2.3. Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value measured (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Duty Cycle	2.4 GHz to 2.4835 GHz	95%	±1.14 %
Minimum 6 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±4.59 %
Conducted Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	±1.13 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±4.65 dB
Radiated Spurious Emissions	1 GHz to 25 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4. Test and Measurement Equipment**Test Equipment Used for Conducted Tests**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2037	Thermohygrometer	Testo	608-H1	45124925	27 Mar 2019	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	20 Apr 2020	24
M1276	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	20 Apr 2020	24
G0614	Signal Generator	Rohde & Schwarz	SMB100A	177687	08 May 2020	36
M1794	Spectrum Analyzer	Rohde & Schwarz	FSU26	100027	28 Feb 2019	24
A2525	Attenuator	AtlanTecRF	AN18W5-10	832837#3	Calibrated before use	-

Test Equipment Used for Transmitter Radiated Emissions Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	27 Feb 2019	12
K0017	3m RSE Chamber	Rainford	N/A	N/A	20 Feb 2019	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	18 Apr 2019	12
A2895	Antenna	Schwarzbeck	BBHA 9170	9170-728	20 Feb 2019	12
A2896	Pre-Amplifier	Schwarzbeck	BBV 9721	9721 - 023	20 Feb 2019	12
A2890	Antenna	Schwarzbeck	HWRD 750	014	19 Feb 2019	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	BBHA 9120 B 653	19 Feb 2019	12
A2863	Pre-Amplifier	Agilent	8449B	3008A02100	19 Feb 2019	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#1	21 Feb 2019	12
A2914	High Pass Filter	AtlanTecRF	AFH-03000	2155	22 Feb 2019	12
A3014	High Pass Filter	AtlanTecRF	AFH-06000	17042400007	22 Feb 2019	12
A2947	High Pass Filter	AtlanTecRF	AFH-07000	1601900001	22 Feb 2019	12
A2891	Pre-Amplifier	Schwarzbeck	BBV 9718	9718-306	20 Feb 2019	12
A2131	Low Pass Filter	AtlanTecRF	AFL-02000	JFB1004-002	22 Feb 2019	12
A490	Antenna	Chase	CBL6111A	1590	03 Apr 2019	12

Test Equipment Used for Transmitter Band Edge Radiated Emissions Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	27 Feb 2019	12
K0017	3m RSE Chamber	Rainford	N/A	N/A	20 Feb 2019	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	18 Apr 2019	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	BBHA 9120 B 653	19 Feb 2019	12
A2863	Pre-Amplifier	Agilent	8449B	3008A02100	19 Feb 2019	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#1	21 Feb 2019	12

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A1990
Test Sample Serial Number:	C02WC006JMFN (<i>Conducted sample #1</i>)
Hardware Version:	EVT
Software Version:	17G2033
BT BB Version:	v40
FCC ID:	BCGA1990

Brand Name:	Apple
Model Name or Number:	A1990
Test Sample Serial Number:	C02WC006JT9W (<i>Radiated sample #1</i>)
Hardware Version:	EVT
Software Version:	17G2057
BT BB Version:	V45
FCC ID:	BCGA1990

Brand Name:	Apple
Model Name or Number:	A1990
Test Sample Serial Number:	C02VT01FJLG2 (<i>Radiated sample #2</i>)
Hardware Version:	EVT
Software Version:	17G2057
BT BB Version:	V45
FCC ID:	BCGA1990

3.2. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3. Additional Information Related to Testing

Technology Tested:	<i>Bluetooth</i> Low Energy (Digital Transmission System)		
Type of Unit:	Transceiver		
Channel Spacing:	2 MHz		
Modulation:	GFSK		
Data Rate: LE	1 Mbps		
Data Rate: LE2M	2 Mbps		
Power Supply Requirement(s):	Nominal	3.8 VDC via 120 VAC 60 Hz AC/DC Adapter	
Maximum Conducted Output Power:	7.0 dBm		
Transmit Frequency Range:	2402 MHz to 2480 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	37	2402
	Middle	17	2440
	Top	39	2480

3.4. Description of Available Antennas

The radio utilizes an integrated antenna, with the following maximum gain:

Frequency Range (MHz)	Antenna Gain (dBi)
2400-2480	2.1

3.5. Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Personal Hands-Free (PHF)
Brand Name:	Apple
Model Name or Number:	Apple EarPods
Serial Number:	Not marked or stated

Description:	USB-C Adapter
Brand Name:	Belkin
Model Name or Number:	F2CU040
Serial Number:	Not marked or stated

Description:	USB-C Power Adapter
Brand Name:	Apple
Model Name or Number:	A1718
Serial Number:	Not marked or stated

Description:	Type C USB Cable. Length 2.0 metres
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Operating Modes

The EUT was tested in the following operating mode(s):

- Transmitting at maximum power in *Bluetooth* LE mode with modulation, maximum possible data length available and Pseudorandom Bit Sequence 9.
- Transmitting at maximum power in *Bluetooth* LE2M mode with modulation, maximum possible data length available and Pseudorandom Bit Sequence 9.

Configuration and Peripherals


The EUT was tested in the following configuration(s):

- Controlled in test mode using a set of commands entered into a terminal application on the EUT. The commands were used to enable a continuous transmission and to select the test channels as required. The customer supplied a document containing the setup instructions 'EUT_BT_BTLE_CPM_SOP v1.0.docx'.
- The EUT was powered from a 120 VAC 60 Hz single phase mains supply.
- Transmitter radiated spurious emissions tests were performed with the EUT transmitting in LE2M mode as this was found to transmit the highest power.
- Transmitter radiated spurious emissions tests were performed with the AC charger and PHF connected to the EUT.

Test Setup Diagrams


Conducted Tests:

Test Setup for Transmitter Minimum 6 dB Bandwidth, Duty Cycle & Maximum Peak Output Power

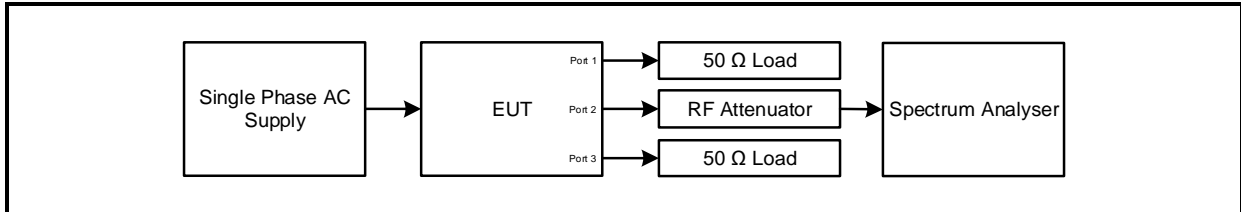


Radiated Tests:

Test Setup for Transmitter Radiated Emissions

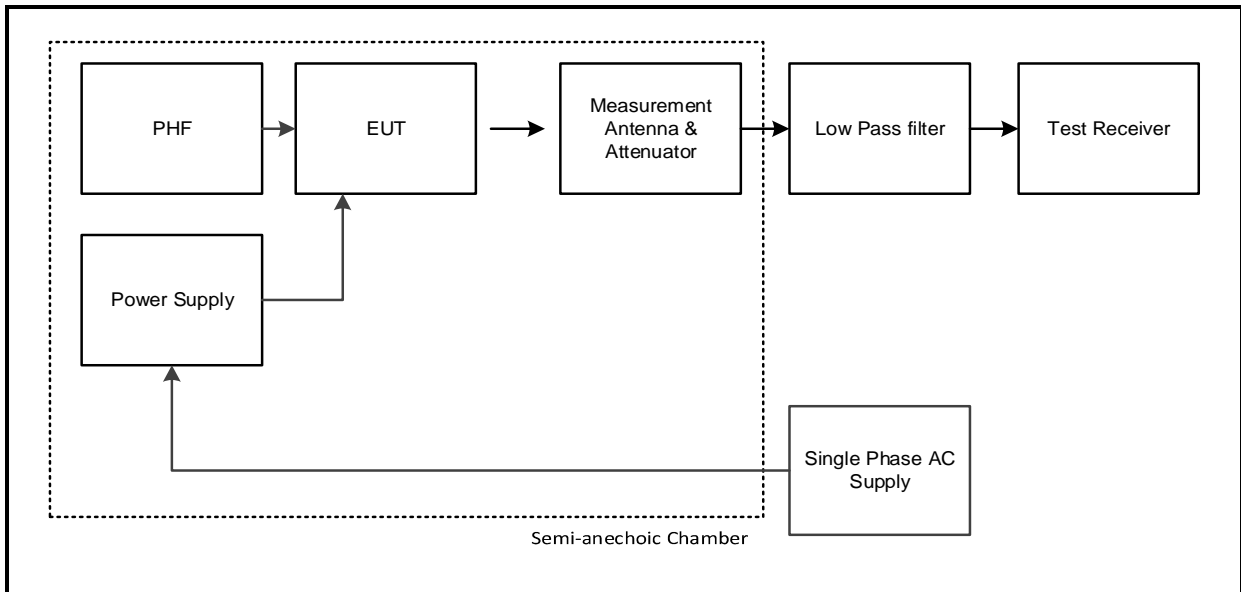

Test Setup Diagrams (continued)

Test Setup for Transmitter Radiated Emissions (continued)

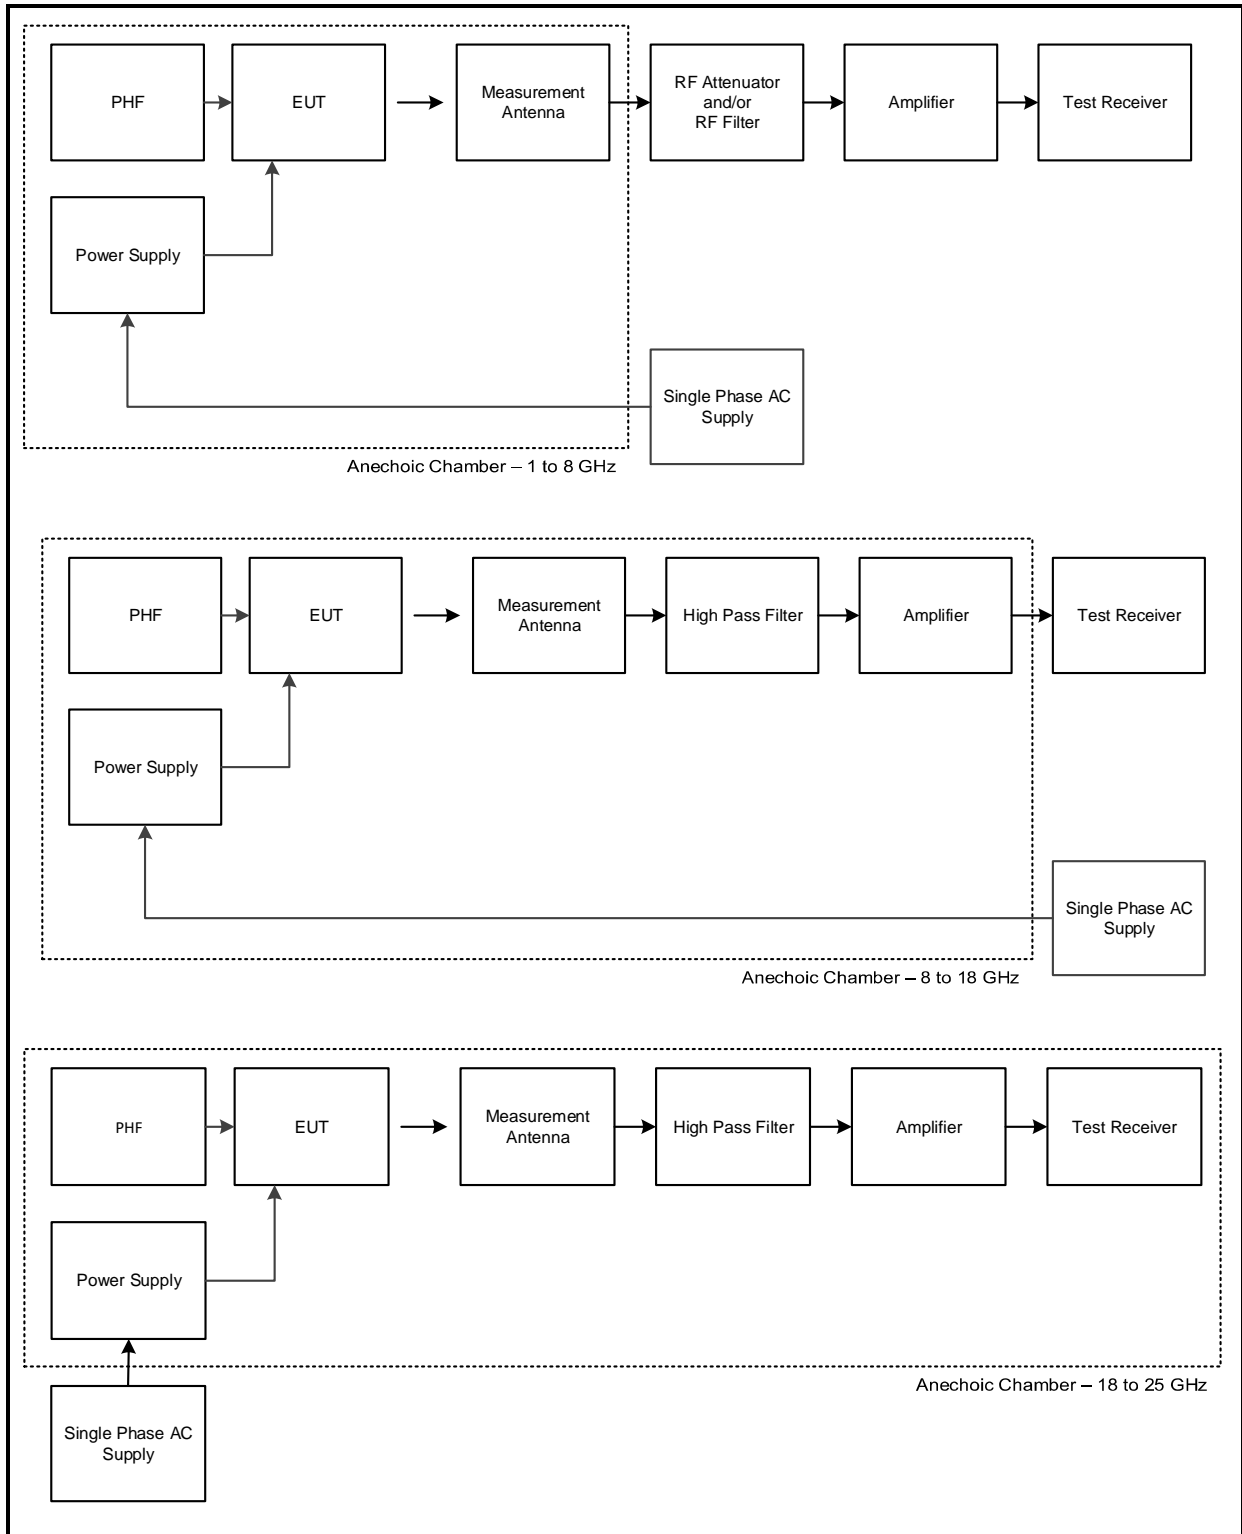

4. Antenna Port Test Results

4.1. Transmitter Minimum 6 dB Bandwidth

Test Summary:

Test Engineer:	Victor Carmon	Test Date:	01 June 2018
Test Sample Serial Number:	C02WC006JMFN		

FCC Reference:	Part 15.247(a)(2)
Test Method Used:	FCC KDB 558074 Section 8.1 Option 1

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	60


Note(s):

1. 6 dB DTS bandwidth tests were performed using a spectrum analyser in accordance with FCC KDB 558074 Section 8.1 Option 1 measurement procedure. The spectrum analyser resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The DTS bandwidth was measured at 6 dB down from the peak of the signal.
2. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.


Transmitter Minimum 6 dB Bandwidth (continued)

Results: LE


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	730.769	≥500	230.769	Complied
Middle	737.308	≥500	237.308	Complied
Top	734.231	≥500	234.231	Complied

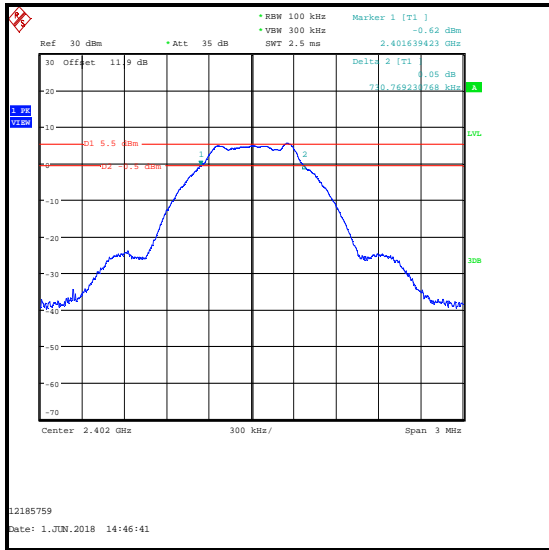

Bottom Channel

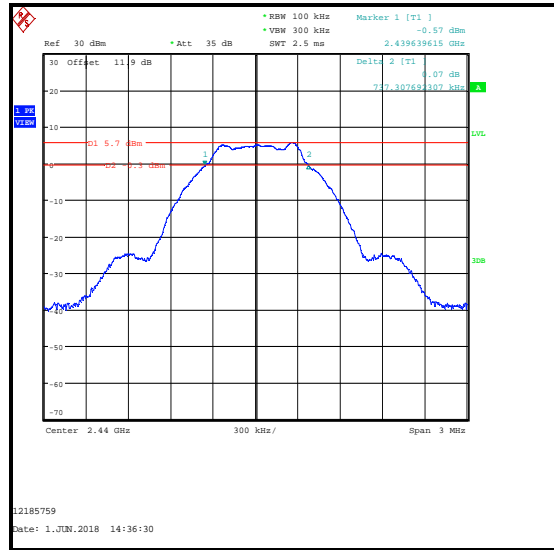

Middle Channel

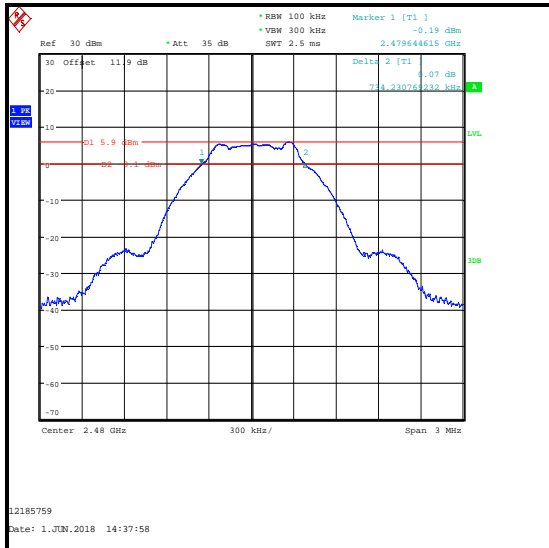


Top Channel


Transmitter Minimum 6 dB Bandwidth (continued)

Results: LE2M


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	1137.500	≥500	637.500	Complied
Middle	1135.577	≥500	635.577	Complied
Top	1139.103	≥500	639.103	Complied

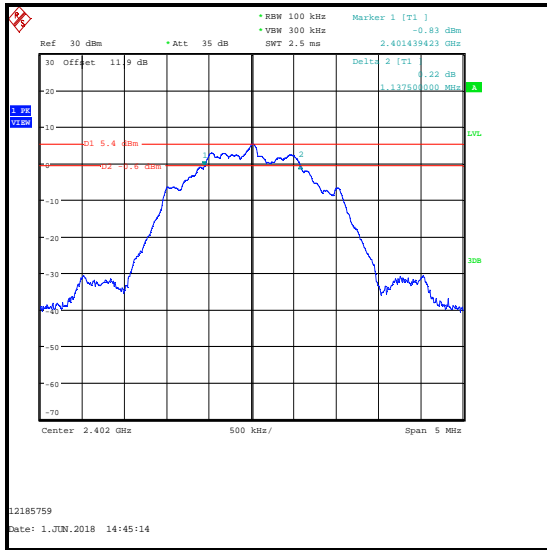

Bottom Channel

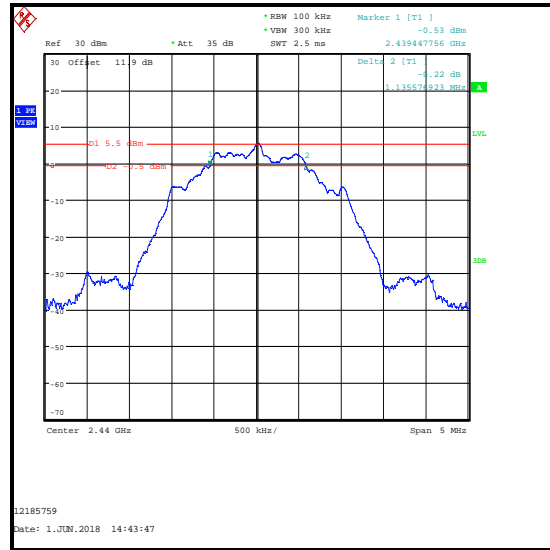

Middle Channel

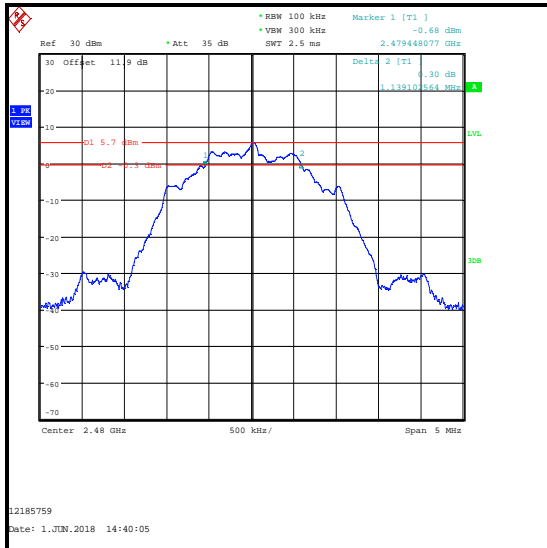

Top Channel

4.2. Transmitter Duty Cycle

Test Summary:

Test Engineer:	Victor Carmon	Test Date:	01 June 2018
Test Sample Serial Number:	C02WC006JMFN		

FCC Reference:	Part 15.35(c)
Test Method Used:	FCC KDB 558074 Section 6.0

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	60

Note(s):

- In order to assist with the determination of the average level of spurious emissions field strength in LE2M mode, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:


$$10 \log (1 / (\text{On Time} / [\text{Period or } 100 \text{ ms whichever is the lesser}])).$$

$$\text{LE2M duty cycle: } 10 \log (1 / (203.451\mu\text{s} / 629.252\mu\text{s})) = 4.9 \text{ dB}$$

- The LE mode duty cycle was measured and found to be greater than 98%. No duty cycle correction is required.

Results: LE2M

Pulse Duration (µs)	Period (µs)	Duty Cycle (dB)
203.451	629.252	4.9

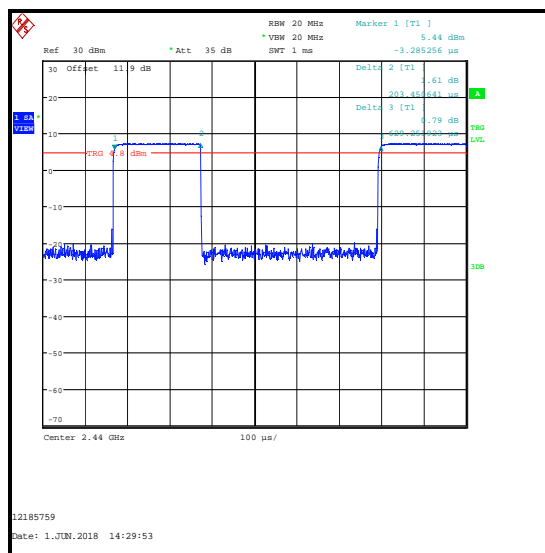

4.3. Transmitter Maximum Peak Output Power**Test Summary:**

Test Engineer:	Victor Carmon	Test Date:	01 June 2018
Test Sample Serial Number:	C02WC006JMFN		

FCC Reference:	Part 15.247(b)(3)
Test Method Used:	FCC KDB 558074 Section 9.1.1 and Notes below

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	60

Note(s):

1. Conducted power tests were performed using a spectrum analyser in accordance with FCC KDB 558074 Section 9.1.1 with the RBW > *DTS bandwidth* procedure.
2. The spectrum analyser resolution bandwidth was set to 2 MHz (LE) or 3 MHz (LE2M) and video bandwidth to 10 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 10 MHz. A marker was placed at the peak of the signal and the results recorded in the tables below.
3. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the spectrum analyser to compensate for the loss of the attenuator and RF cable.
4. The conducted power was added to the declared antenna gain to obtain the EIRP.


Transmitter Maximum Peak Output Power (continued)**Results: LE**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	6.6	30.0	23.4	Complied
Middle	6.8	30.0	23.2	Complied
Top	7.0	30.0	23.0	Complied


Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	6.6	2.1	8.7	36.0	27.3	Complied
Middle	6.8	2.1	8.9	36.0	27.1	Complied
Top	7.0	2.1	9.1	36.0	26.9	Complied

Transmitter Maximum Peak Output Power (continued)


Results: LE

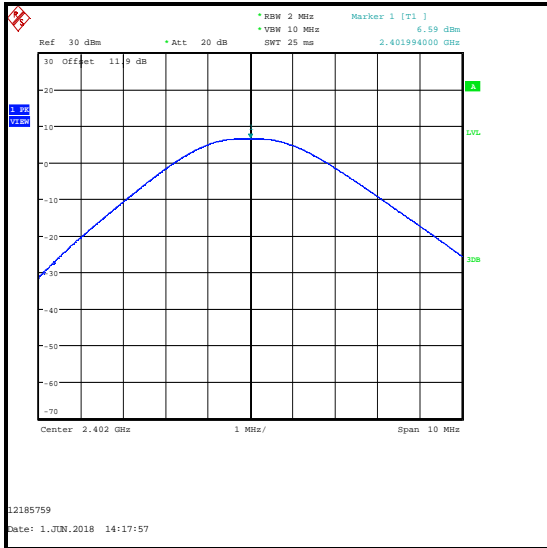

Bottom Channel

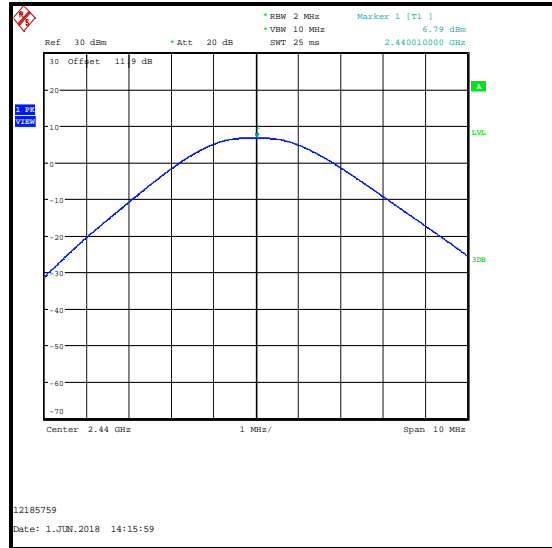

Middle Channel

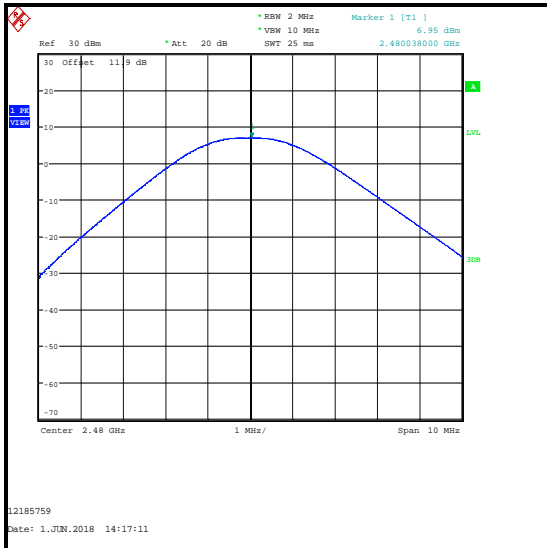

Top Channel


Transmitter Maximum Peak Output Power (continued)**Results: LE2M**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	6.7	30.0	23.3	Complied
Middle	6.9	30.0	23.1	Complied
Top	7.0	30.0	23.0	Complied


Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	6.7	2.1	8.8	36.0	27.2	Complied
Middle	6.9	2.1	9.0	36.0	27.0	Complied
Top	7.0	2.1	9.1	36.0	26.9	Complied

Transmitter Maximum Peak Output Power (continued)


Results: LE2M

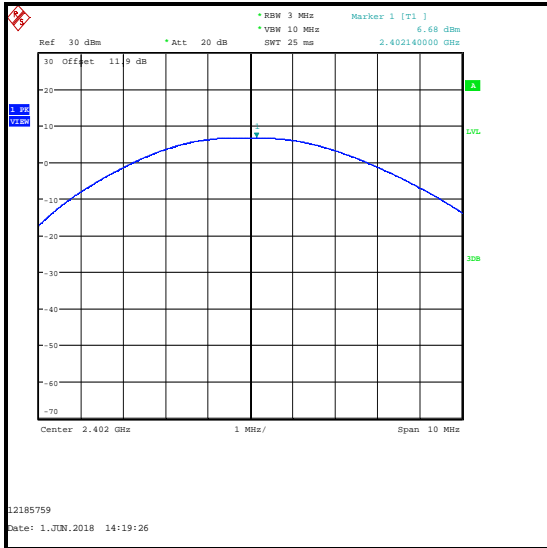

Bottom Channel

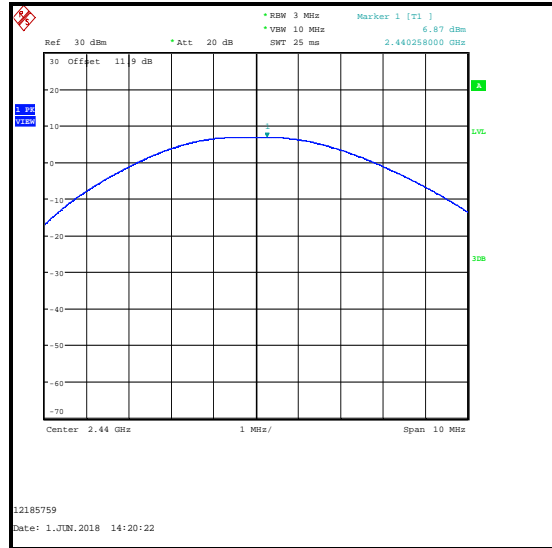

Middle Channel

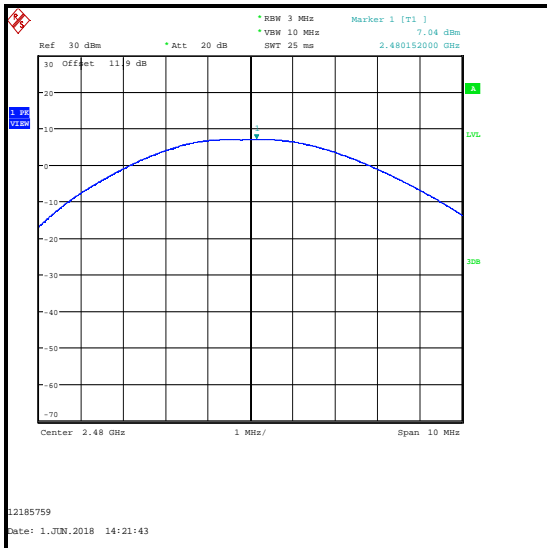

Top Channel

5. Radiated Test Results

5.1. Transmitter Radiated Emissions <1 GHz

Test Summary:

Test Engineer:	Alan Withers	Test Date:	15 May 2018
Test Sample Serial Number:	C02WC006JT9W		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Sections 6.3 and 6.5
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	43


Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. All emissions shown on the pre-scans were investigated and found to be ambient, or > 20 dB below the appropriate limit or below the noise floor of the measurement system. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
3. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the middle channel only.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth 500 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.

Transmitter Radiated Emissions (continued)

Results: Peak / Middle Channel / LE2M

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
994.396	Vertical	36.0	54.0	18.0	Complied

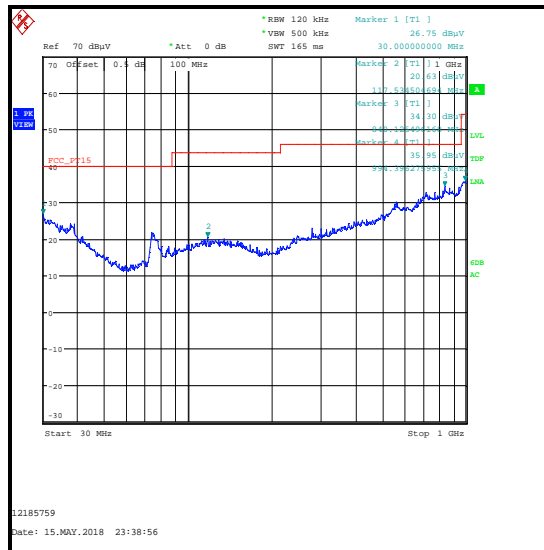

5.2. Transmitter Radiated Emissions >1 GHz**Test Summary:**

Test Engineers:	Alan Withers & Andrew Edwards	Test Dates:	14 May 2018 & 15 May 2018
Test Sample Serial Number:	C02WC006JT9W		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	FCC KDB 558074 Sections 11 & 12 referencing ANSI C63.10 Sections 6.3 and 6.6
Frequency Range	1 GHz to 25 GHz

Environmental Conditions:

Temperature (°C):	24 to 25
Relative Humidity (%):	41 to 48

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The emission shown on the 1 GHz to 3 GHz plot is the EUT fundamental.
3. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak and average noise floor readings of the measuring receiver were recorded as shown in the tables below.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT.
5. Pre-scans were performed and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz. The sweep time was set to auto. Peak and average measurements were performed with their own appropriate detectors during the pre-scan measurements.





Results: Peak / Middle Channel / LE2M

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
2872.500	Vertical	53.3	74.0	20.7	Complied

Results: Average / Middle Channel / LE2M

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2905.500	Vertical	47.1	54.0	6.9	Complied

Transmitter Radiated Emissions (continued)

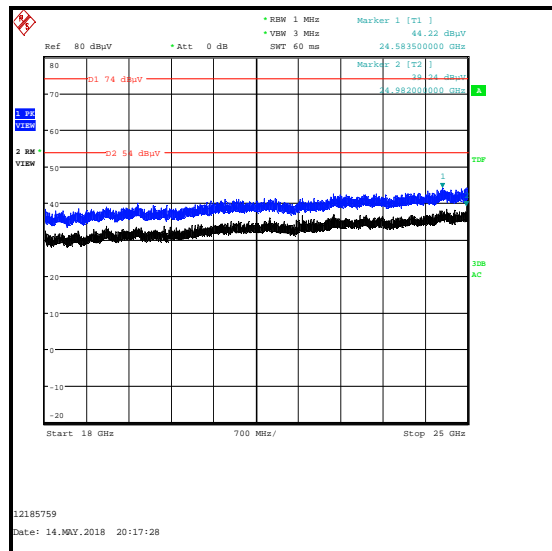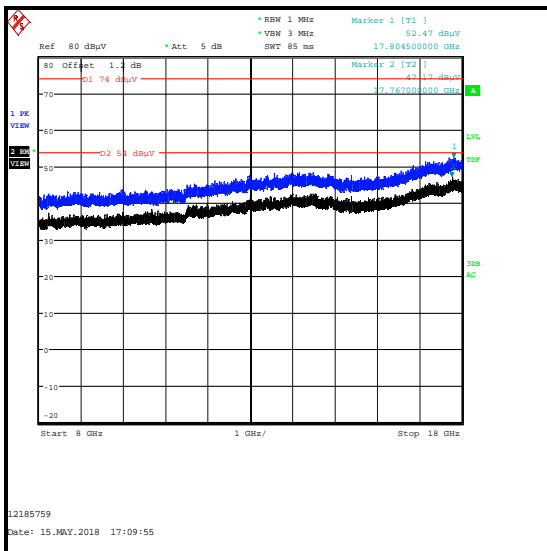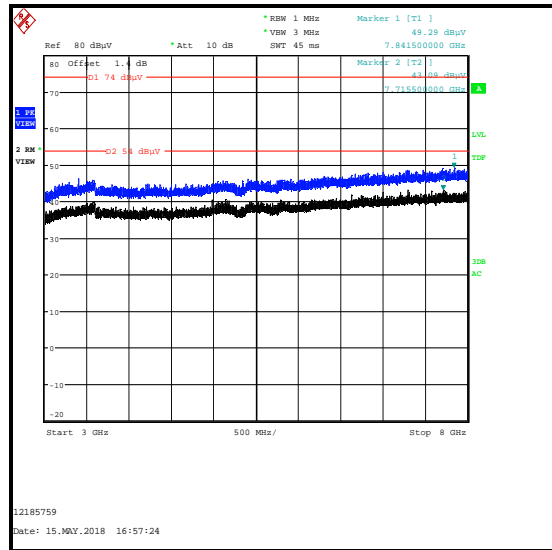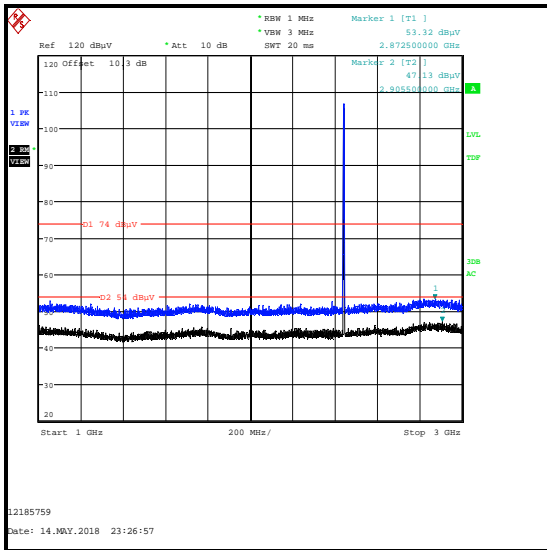

5.3. Transmitter Band Edge Radiated Emissions

Test Summary:

Test Engineer:	Andrew Edwards	Test Dates:	14 January 2018 & 17 May 2018
Test Sample Serial Numbers:	C02WC006JT9W & C02VT01FJLG2		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	KDB 558074 Section 11, 12 & Notes below

Environmental Conditions:

Temperature (°C):	23 to 24
Relative Humidity (%):	39 to 56

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The maximum peak conducted output power was previously measured. In accordance with FCC KDB 558074 Section 11.1(a), the lower band edge measurement was performed with a peak detector and the -20 dBc limit applied.
3. As the lower band edge is adjacent to a non-restricted band, only peak measurements are required. In accordance with FCC KDB 558074 Section 11.1, the test method in Section 11.3 was followed: the test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. As the maximum peak conducted output power was measured using an peak detector in accordance with FCC KDB 558074 Section 9.1.1 an out-of-band limit line was placed 20 dB (FCC KDB 558074 Section 11.1(a)) below the peak level. A marker was placed on the band edge spot frequencies. Marker frequency and levels were recorded.
4. As the upper band edge is adjacent to a restricted band, both peak and average measurements were recorded by placing a marker at the edge of the band. For peak measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. For average measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. An RMS detector was used, sweep time was set to auto and trace mode was trace averaging over 300 sweeps. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
5. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with peak and RMS detectors respectively. Markers were placed on the highest point on each trace.
6. * -20 dBc limit.
7. **As the EUT had a duty cycle < 98% the duty cycle correction factor has been applied to the LE2M upper band edge average result. The corrected level is shown below:

Upper Band Average result + duty cycle = Corrected band edge level

Corrected band edge level at 2483.5 MHz : 45.2 + 4.9 = 50.1 dBμV/m

Transmitter Band Edge Radiated Emissions (continued)**Results: Peak / LE**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.000	Vertical	43.3	84.6*	41.3	Complied
2483.500	Vertical	53.5	74.0	20.5	Complied

Results: Average / LE

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.500	Vertical	41.5	54.0	12.5	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak / LE


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2311.410	Vertical	50.9	74.0	23.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average / LE


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2364.615	Vertical	39.5	54.0	14.5	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: LE

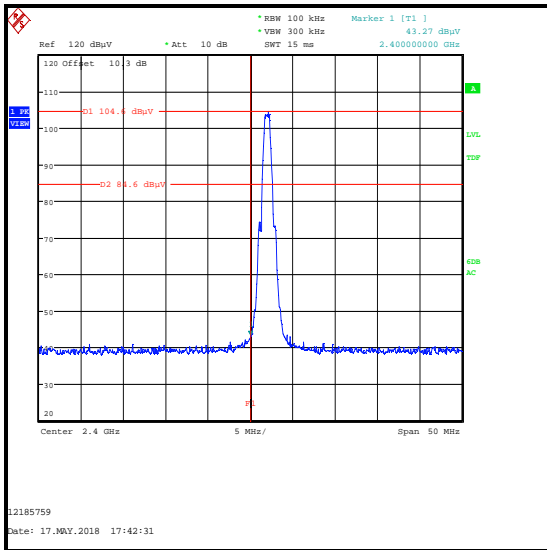

Lower Band Edge

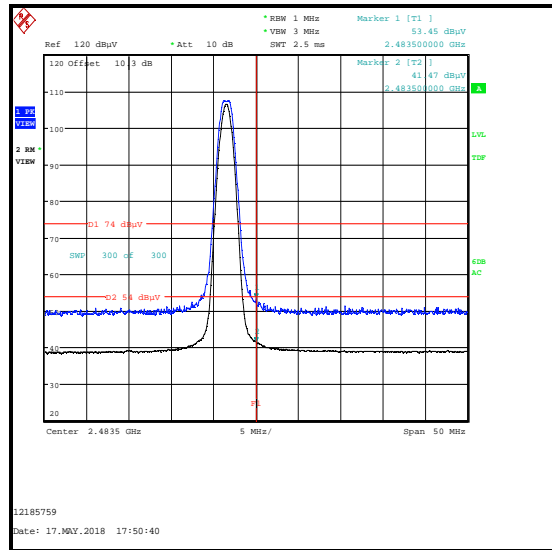

Upper Band Edge

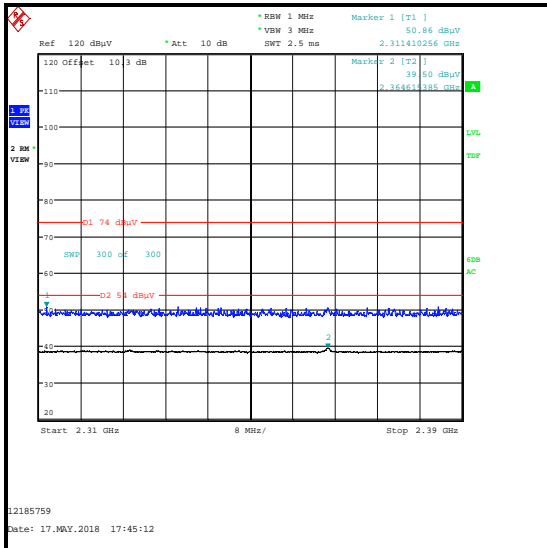

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Peak / LE2M**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.000	Vertical	71.1	85.0*	13.9	Complied
2483.500	Vertical	59.0	74.0	15.0	Complied

Results: Average / LE2M

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.500	Vertical	45.2	4.9	50.1	54.0	3.9	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak / LE2M


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2345.513	Vertical	52.2	74.0	21.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average / LE2M


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2320.256	Vertical	40.5	54.0	13.5	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: LE2M

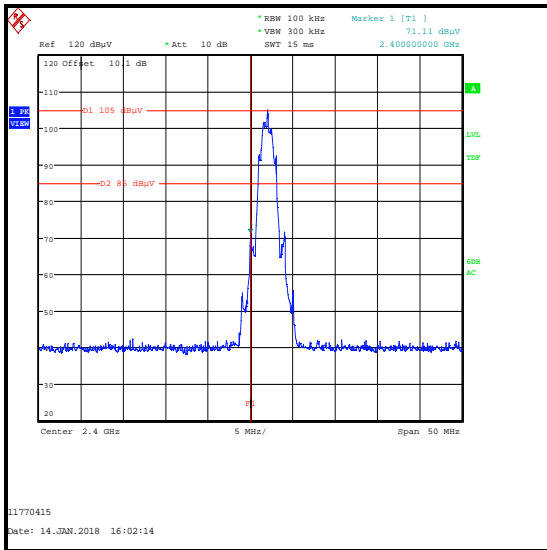

Lower Band Edge

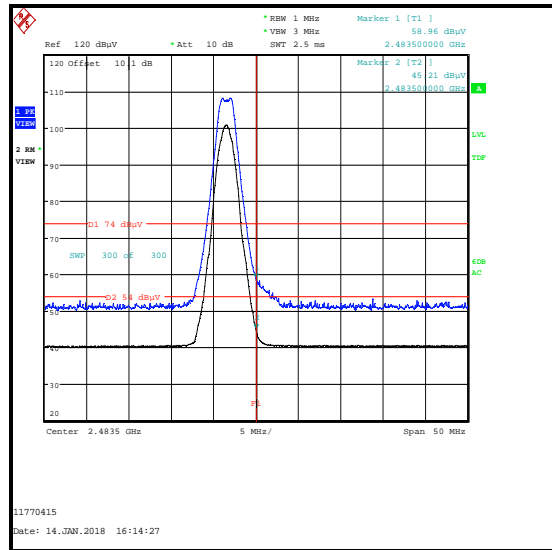

Upper Band Edge

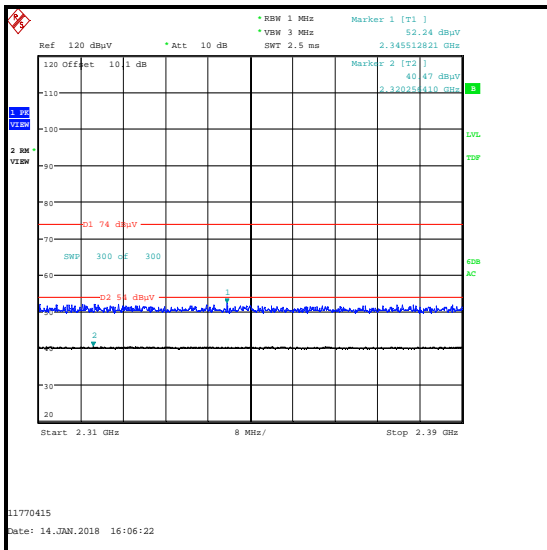

2310 MHz to 2390 MHz Restricted Band

--- END OF REPORT ---