




Plot 7-61. 26dB BW & 99% OBW Ant 2 (20MHz BW 11ax Index 37 – RU52 – Ch.116)

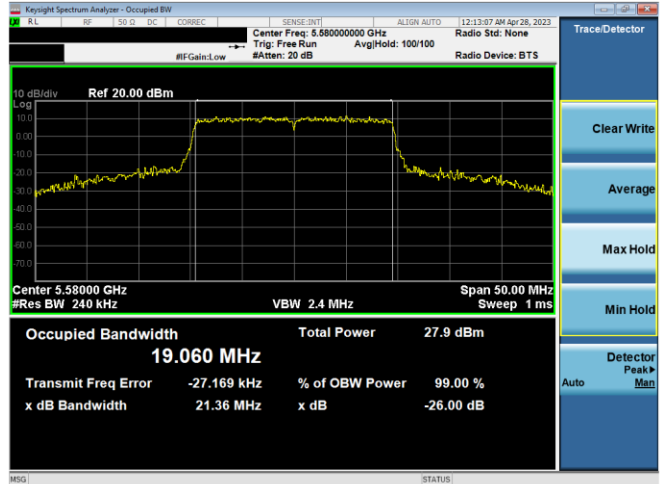


Plot 7-64. 26dB BW & 99% OBW Ant 2 (20MHz BW 11ax– RU242 – Ch.116)

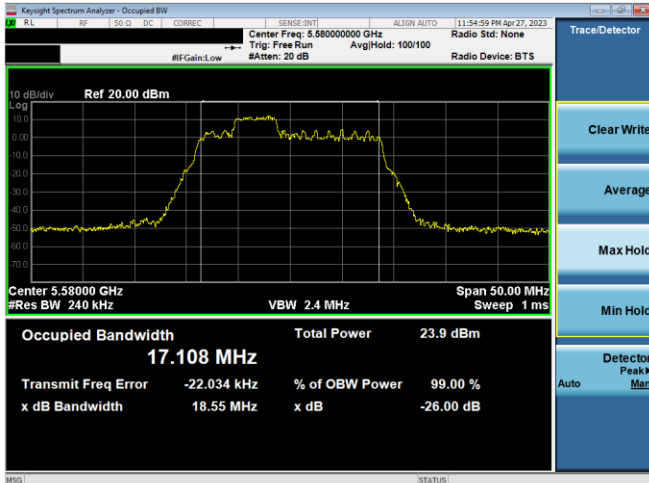


Plot 7-62. 26dB BW & 99% OBW Ant 2 (20MHz BW 11ax Index 38 – RU52 – Ch.116)

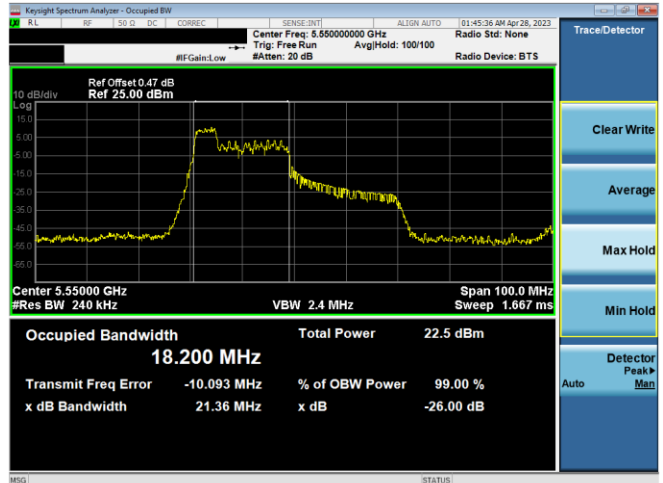

Plot 7-65. 26dB BW & 99% OBW Ant 2 (40MHz BW 11ax Index 37 – RU52 – Ch.110)

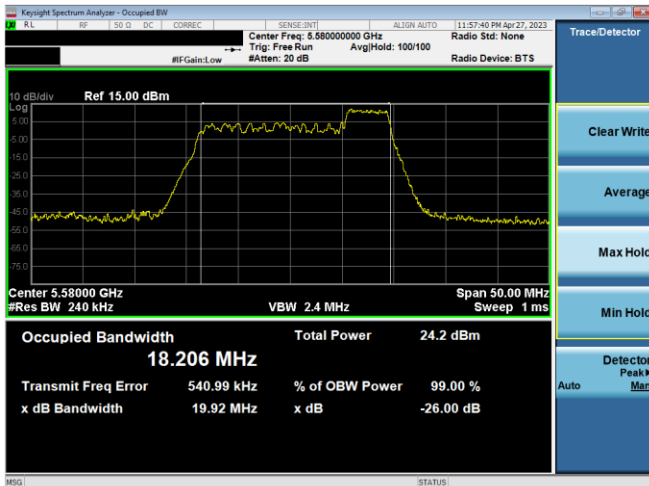


Plot 7-63. 26dB BW & 99% OBW Ant 2 (20MHz BW 11ax Index 40– RU52 – Ch.116)

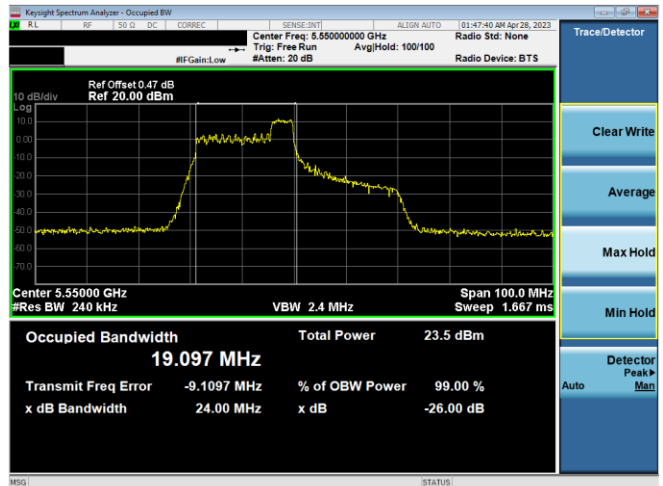


Plot 7-66. 26dB BW & 99% OBW Ant 2 (40MHz BW 11ax Index 40 – RU52 – Ch.110)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 34 of 263

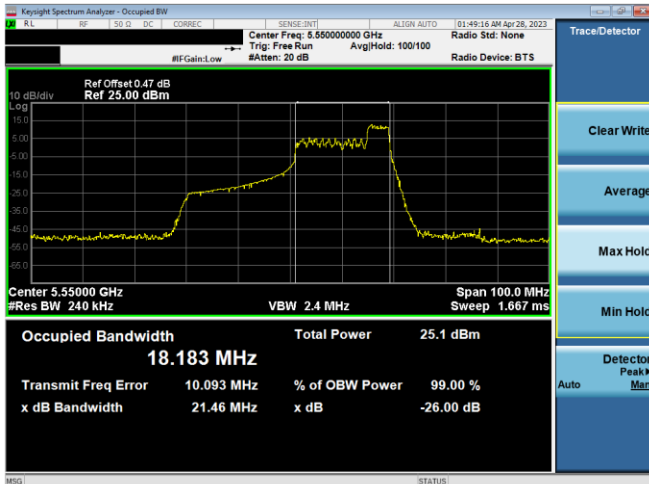


Plot 7-67. 26dB BW & 99% OBW Ant 2 (40MHz BW 11ax Index 44 – RU52 – Ch.110)

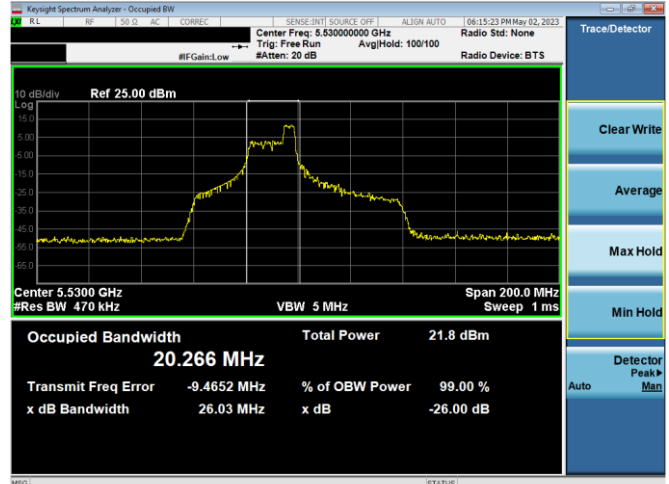


Plot 7-70. 26dB BW & 99% OBW Ant 2 (80MHz BW 11ax Index 44 – RU52 – Ch.106)

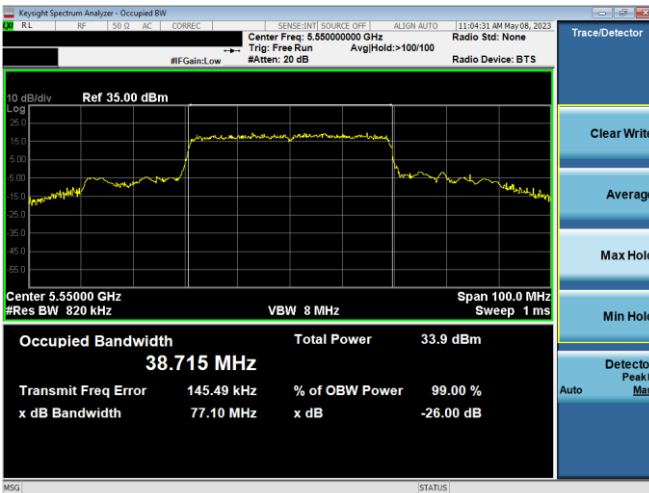


Plot 7-68. 26dB BW & 99% OBW Ant 2 (40MHz BW 11ax – RU484 – Ch.110)

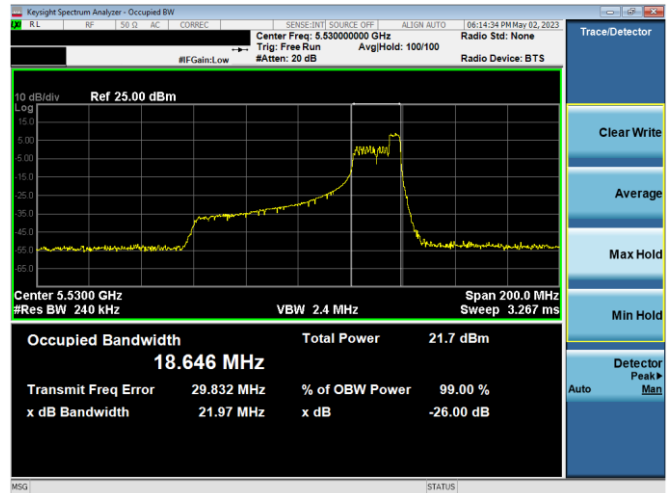

Plot 7-71. 26dB BW & 99% OBW Ant 2 (80MHz BW 11ax Index 52 – RU52 – Ch.106)

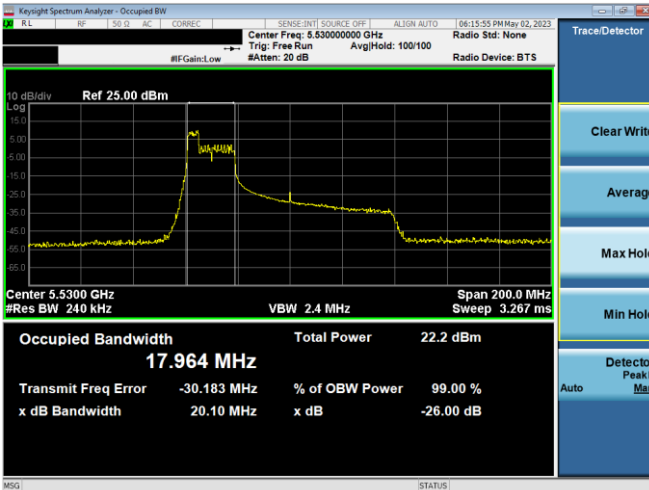

Plot 7-69. 26dB BW & 99% OBW Ant 2 (80MHz BW 11ax Index 37 – RU52 – Ch.106)

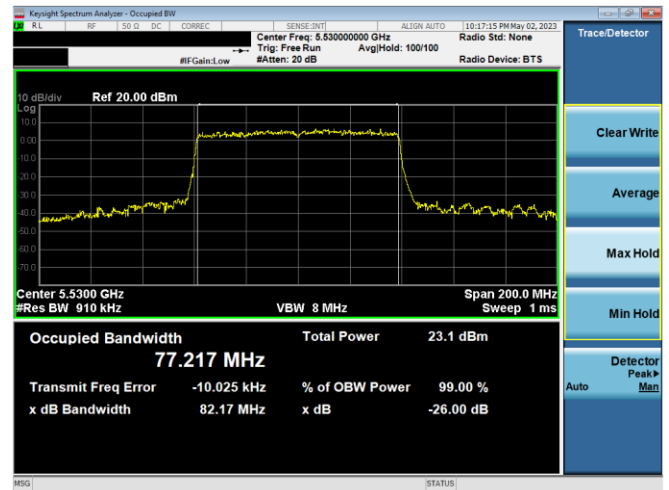

Plot 7-72. 26dB BW & 99% OBW Ant 2 (80MHz BW 11ax – RU996 – Ch.106)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 35 of 263

7.3 6dB & 99% Bandwidth Measurement – 802.11ax OFDMA

§2.1049; §15.407 (e); RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer’s bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Subclause 6.9.2

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers’ automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations were investigated and only the worst case is reported
2. All RU’s were investigated and only worst case partially-loaded and fully-loaded RU’s were reported.
3. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel bandwidth plots have been reported.

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 36 of 263

V 10.5 12/15/2021

Ant 1 6dB & 99% Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	RU Size	RU Index	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	ax (20MHz)	26	0	135/143.4 (MCS11)	18.28	2.13	0.50	Pass
				26	4	135/143.4 (MCS11)	17.40	2.75	0.50	Pass
				26	8	135/143.4 (MCS11)	18.59	2.20	0.50	Pass
	5785	157	ax (20MHz)	26	0	135/143.4 (MCS11)	18.14	2.08	0.50	Pass
				26	4	135/143.4 (MCS11)	17.30	2.70	0.50	Pass
				26	8	135/143.4 (MCS11)	18.32	2.11	0.50	Pass
	5825	165	ax (20MHz)	26	0	135/143.4 (MCS11)	18.29	2.15	0.50	Pass
				26	4	135/143.4 (MCS11)	17.44	2.70	0.50	Pass
				26	8	135/143.4 (MCS11)	18.62	2.18	0.50	Pass
	5755	151	ax (40MHz)	26	0	271/286.8 (MCS11)	17.94	2.13	0.50	Pass
				26	8	271/286.8 (MCS11)	18.75	2.10	0.50	Pass
				26	17	271/286.8 (MCS11)	17.95	2.12	0.50	Pass
	5795	159	ax (40MHz)	26	0	271/286.8 (MCS11)	17.95	2.15	0.50	Pass
				26	8	271/286.8 (MCS11)	18.86	2.16	0.50	Pass
				26	17	271/286.8 (MCS11)	17.93	2.13	0.50	Pass
5775	155	ax (80MHz)	26	0	567/600.5 (MCS11)	17.90	2.25	0.50	Pass	
			26	18	567/600.5 (MCS11)	36.91	2.91	0.50	Pass	
			26	36	567/600.5 (MCS11)	18.05	2.19	0.50	Pass	

Table 7-8. Conducted Bandwidth Measurements Ant 1 (RU26)


	Frequency [MHz]	Channel No.	802.11 Mode	RU Size	RU Index	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	ax (20MHz)	242	61	135/143.4 (MCS11)	19.10	19.17	0.50	Pass
	5785	157	ax (20MHz)	242	61	135/143.4 (MCS11)	19.13	19.10	0.50	Pass
	5825	165	ax (20MHz)	242	61	135/143.4 (MCS11)	19.20	19.19	0.50	Pass
	5755	151	ax (40MHz)	484	65	271/286.8 (MCS11)	38.04	38.16	0.50	Pass
	5795	159	ax (40MHz)	484	65	271/286.8 (MCS11)	38.17	38.15	0.50	Pass
	5775	155	ax (80MHz)	996	67	567/600.5 (MCS11)	77.21	78.11	0.50	Pass

Table 7-9. Conducted Bandwidth Measurements Ant 1 (Fully - loaded RU)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 37 of 263

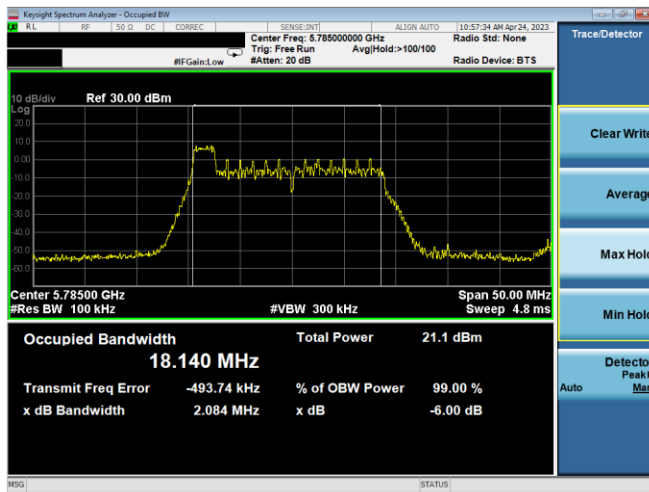


Plot 7-73. 6dB BW & 99% OBW Ant 1 (20MHz BW 11ax Index 0 – RU26 – Ch.157)

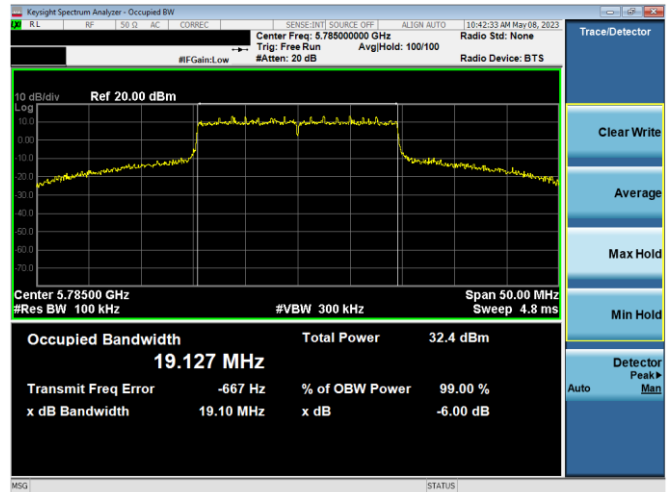


Plot 7-76. 6dB BW & 99% OBW Ant 1 (20MHz BW 11ax– RU242 – Ch.157)

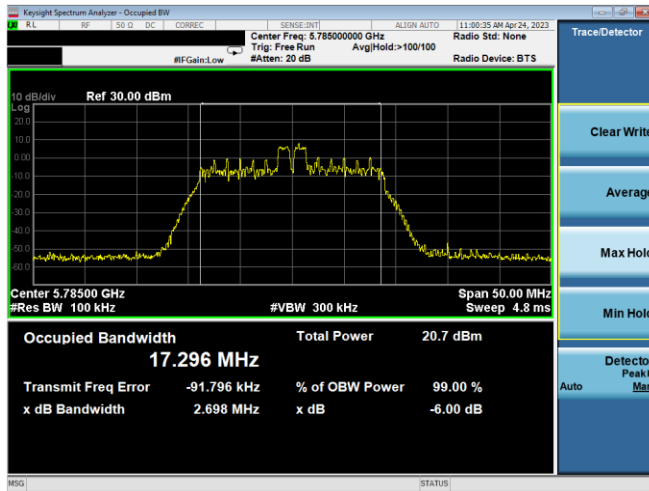


Plot 7-74. 6dB BW & 99% OBW Ant 1 (20MHz BW 11ax Index 4 – RU26 – Ch.157)

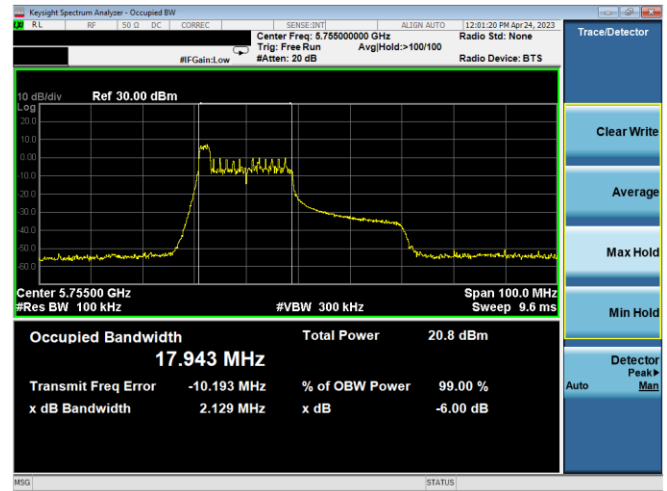

Plot 7-77. 6dB BW & 99% OBW Ant 1 (40MHz BW 11ax Index 0 – RU26 – Ch.151)

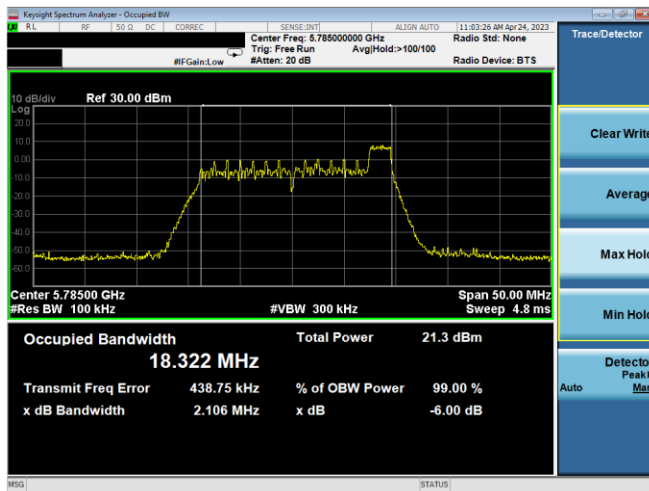


Plot 7-75. 6dB BW & 99% OBW Ant 1 (20MHz BW 11ax Index 8– RU26 – Ch.157)

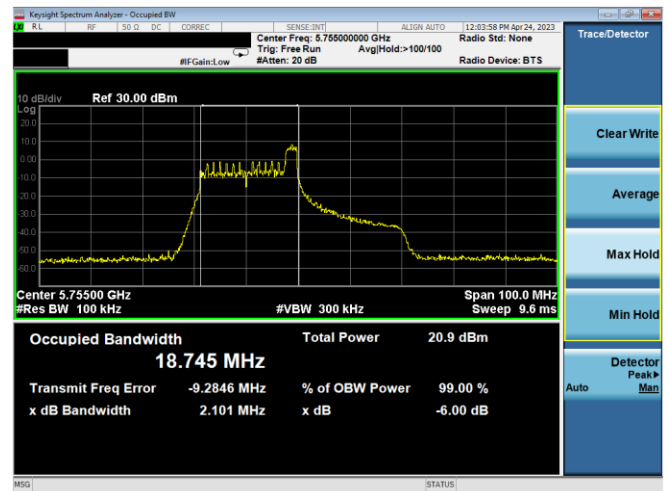


Plot 7-78. 6dB BW & 99% OBW Ant 1 (40MHz BW 11ax Index 8 – RU26 – Ch.151)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 38 of 263

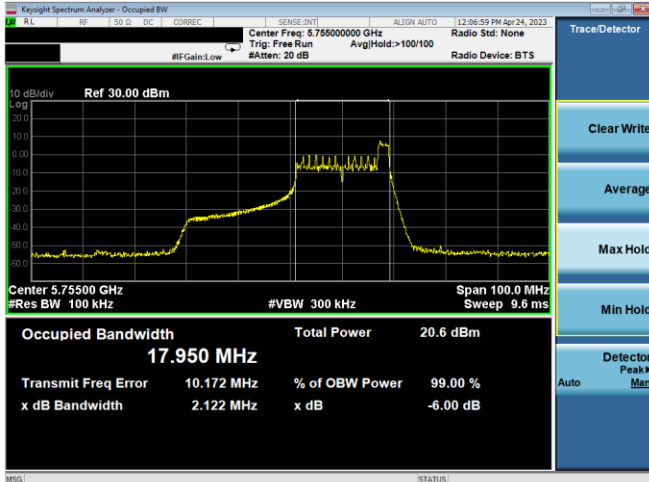


Plot 7-79. 6dB BW & 99% OBW Ant 1 (40MHz BW 11ax Index 17 – RU26 – Ch.151)

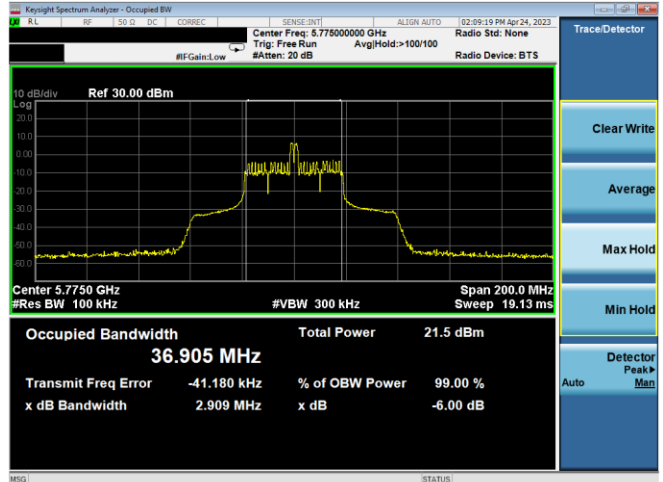


Plot 7-82. 6dB BW & 99% OBW Ant 1 (80MHz BW 11ax Index 18 – RU26 – Ch.155)

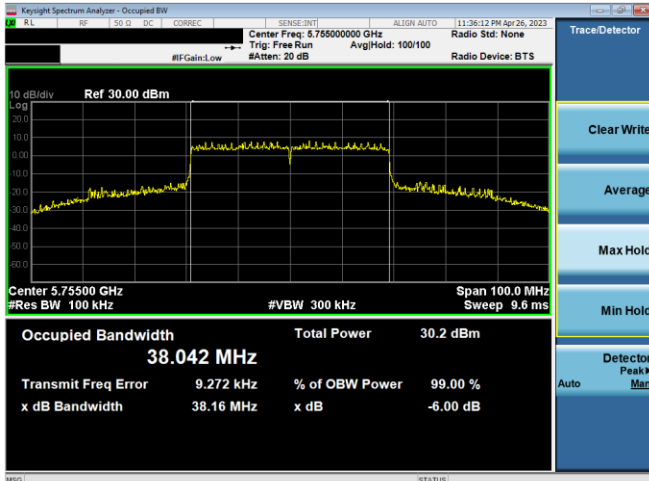


Plot 7-80. 6dB BW & 99% OBW Ant 1 (40MHz BW 11ax – RU484 – Ch.151)

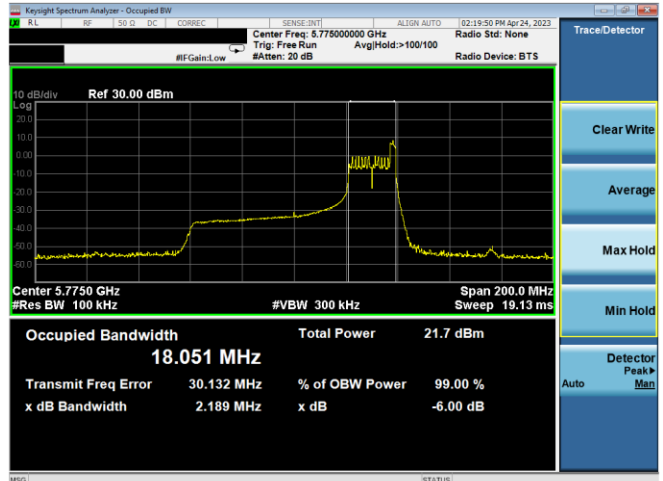

Plot 7-83. 6dB BW & 99% OBW Ant 1 (80MHz BW 11ax Index 36 – RU26 – Ch.155)

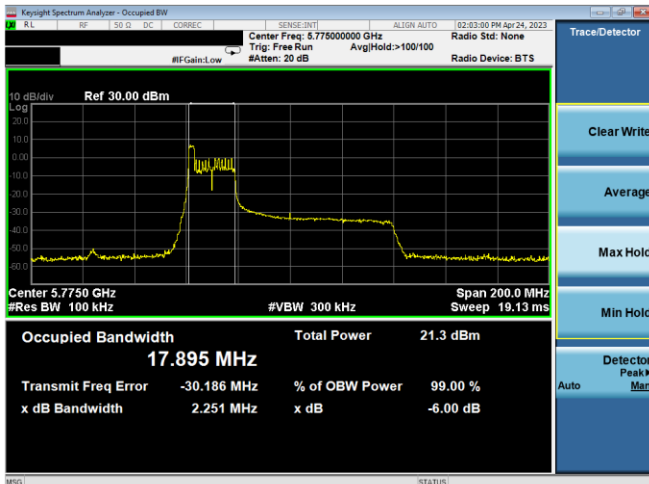

Plot 7-81. 6dB BW & 99% OBW Ant 1 (80MHz BW 11ax Index 0 – RU26 – Ch.155)

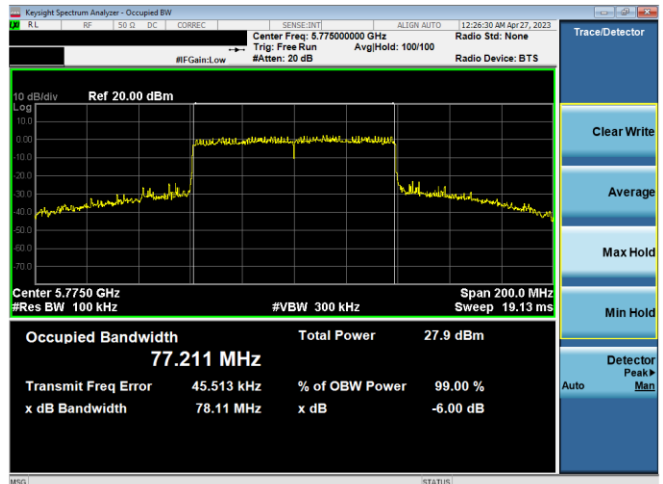

Plot 7-84. 6dB BW & 99% OBW Ant 1 (80MHz BW 11ax – RU996 – Ch.155)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 39 of 263

Ant 2 6dB & 99% Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	RU Size	RU Index	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	ax (20MHz)	26	0	135/143.4 (MCS11)	18.20	2.12	0.50	Pass
				26	4	135/143.4 (MCS11)	17.11	2.71	0.50	Pass
				26	8	135/143.4 (MCS11)	18.37	2.12	0.50	Pass
	5785	157	ax (20MHz)	26	0	135/143.4 (MCS11)	18.20	2.13	0.50	Pass
				26	4	135/143.4 (MCS11)	17.14	2.72	0.50	Pass
				26	8	135/143.4 (MCS11)	18.36	2.12	0.50	Pass
	5825	165	ax (20MHz)	26	0	135/143.4 (MCS11)	18.19	2.09	0.50	Pass
				26	4	135/143.4 (MCS11)	17.22	2.72	0.50	Pass
				26	8	135/143.4 (MCS11)	18.40	2.12	0.50	Pass
	5755	151	ax (40MHz)	26	0	271/286.8 (MCS11)	17.92	2.19	0.50	Pass
				26	8	271/286.8 (MCS11)	18.77	2.15	0.50	Pass
				26	17	271/286.8 (MCS11)	17.97	2.15	0.50	Pass
	5795	159	ax (40MHz)	26	0	271/286.8 (MCS11)	17.97	2.11	0.50	Pass
				26	8	271/286.8 (MCS11)	18.88	2.16	0.50	Pass
				26	17	271/286.8 (MCS11)	17.93	2.12	0.50	Pass
5775	155	ax (80MHz)	26	0	567/600.5 (MCS11)	17.90	2.26	0.50	Pass	
			26	18	567/600.5 (MCS11)	36.91	2.89	0.50	Pass	
			26	36	567/600.5 (MCS11)	18.08	2.28	0.50	Pass	

Table 7-10. Conducted Bandwidth Measurements Ant 2 (RU26)


	Frequency [MHz]	Channel No.	802.11 Mode	RU Size	RU Index	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	ax (20MHz)	242	61	135/143.4 (MCS11)	19.09	19.06	0.50	Pass
	5785	157	ax (20MHz)	242	61	135/143.4 (MCS11)	19.12	19.04	0.50	Pass
	5825	165	ax (20MHz)	242	61	135/143.4 (MCS11)	19.34	19.10	0.50	Pass
	5755	151	ax (40MHz)	484	65	271/286.8 (MCS11)	38.14	38.11	0.50	Pass
	5795	159	ax (40MHz)	484	65	271/286.8 (MCS11)	39.10	38.05	0.50	Pass
	5775	155	ax (80MHz)	996	67	567/600.5 (MCS11)	77.60	77.90	0.50	Pass

Table 7-11. Conducted Bandwidth Measurements Ant 2 (Fully-loaded RU)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 40 of 263

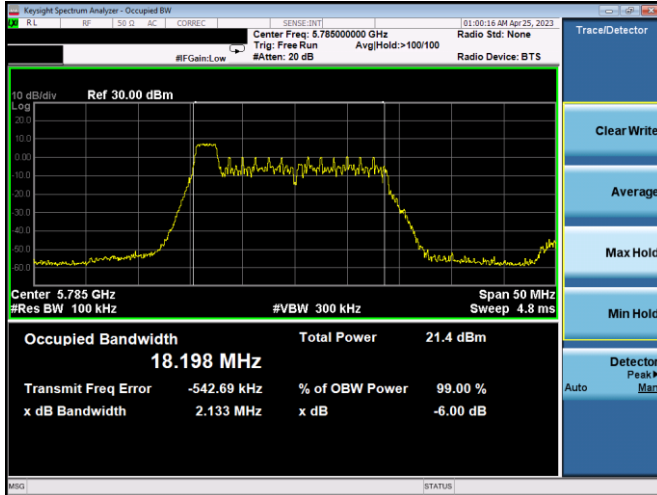


Plot 7-85. 6dB BW & 99% OBW Ant 2 (20MHz BW 11ax Index 0 – RU26 – Ch.157)

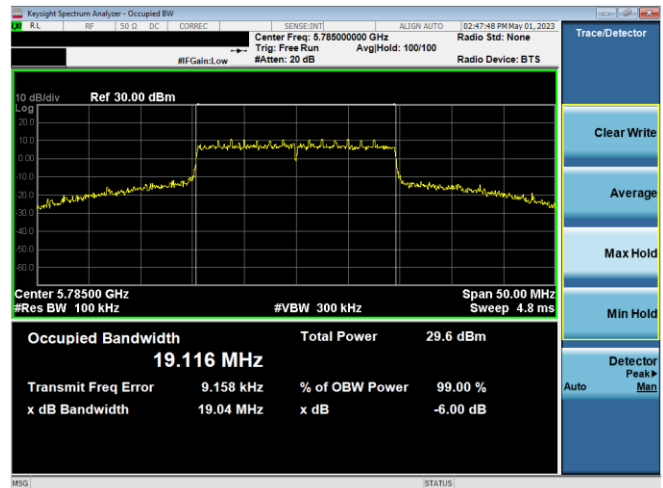


Plot 7-88. 6dB BW & 99% OBW Ant 2 (20MHz BW 11ax– RU242 – Ch.157)

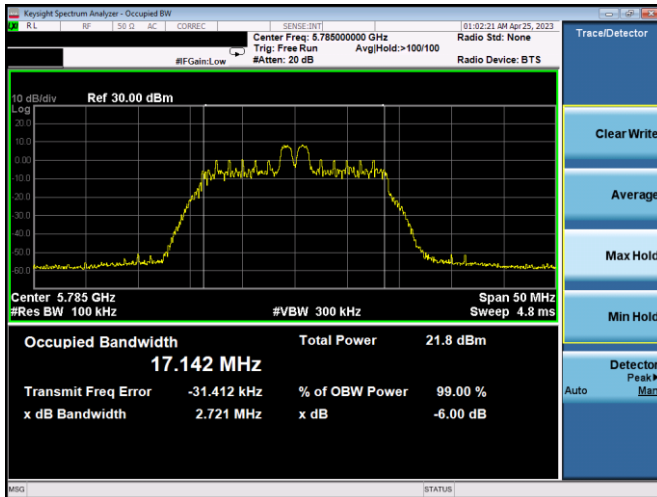


Plot 7-86. 6dB BW & 99% OBW Ant 2 (20MHz BW 11ax Index 4 – RU26 – Ch.157)

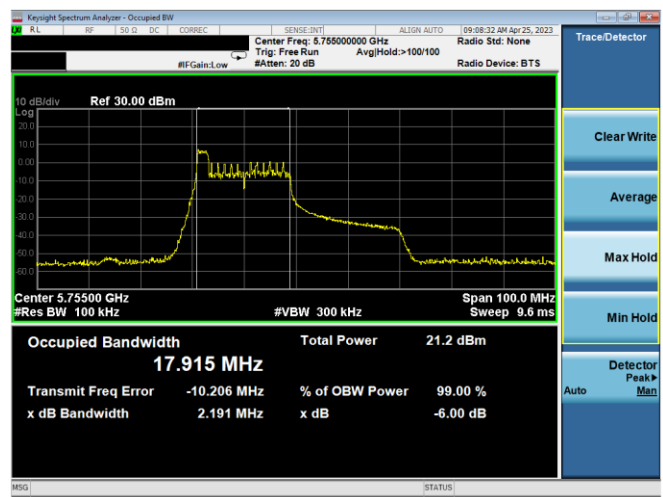

Plot 7-89. 6dB BW & 99% OBW Ant 2 (40MHz BW 11ax Index 0 – RU26 – Ch.151)

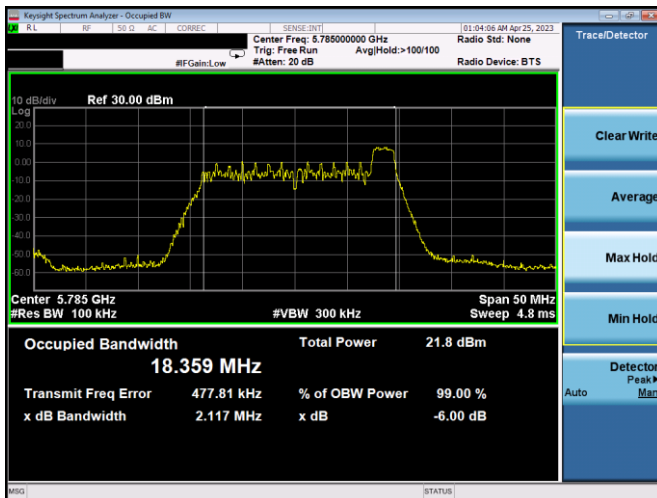


Plot 7-87. 6dB BW & 99% OBW Ant 2 (20MHz BW 11ax Index 8– RU26 – Ch.157)

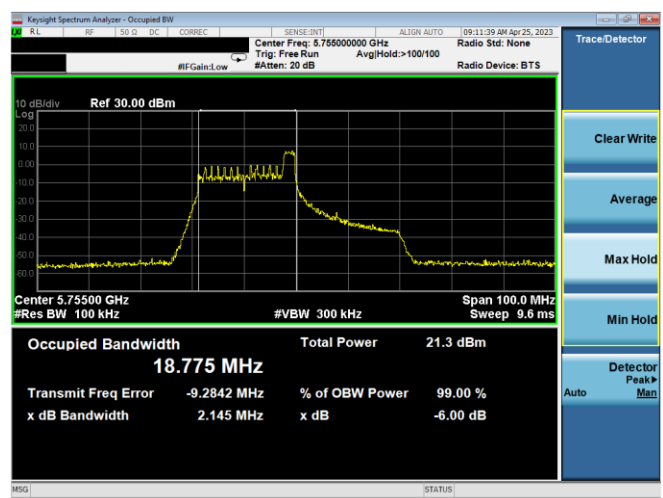


Plot 7-90. 6dB BW & 99% OBW Ant 2 (40MHz BW 11ax Index 8 – RU26 – Ch.151)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 41 of 263

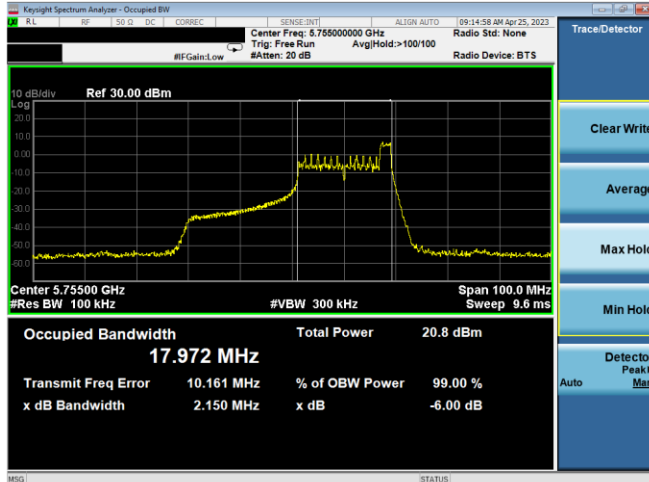


Plot 7-91. 6dB BW & 99% OBW Ant 2 (40MHz BW 11ax Index 17 – RU26 – Ch.151)

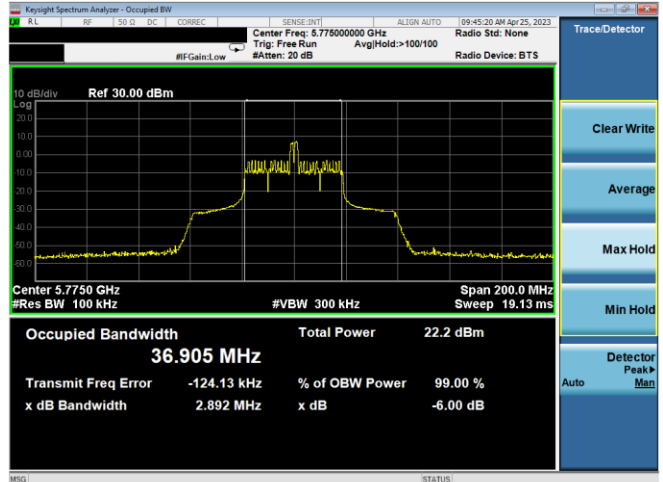


Plot 7-94. 6dB BW & 99% OBW Ant 2 (80MHz BW 11ax Index 18 – RU26 – Ch.155)




Plot 7-92. 6dB BW & 99% OBW Ant 2 (40MHz BW 11ax – RU484 – Ch.151)

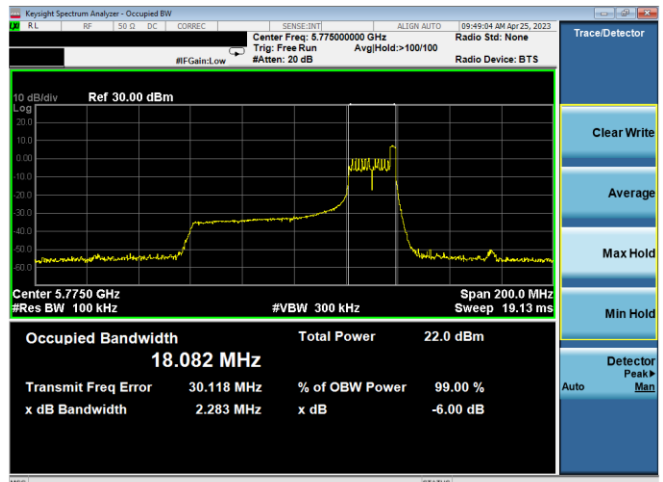

Plot 7-95. 6dB BW & 99% OBW Ant 2 (80MHz BW 11ax Index 36 – RU26 – Ch.155)

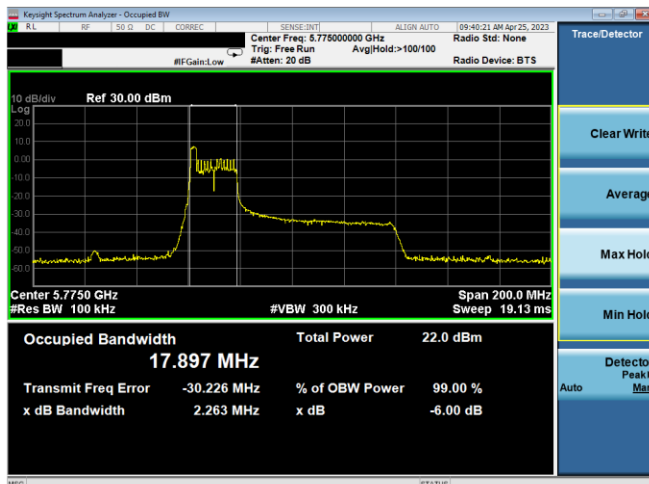

Plot 7-93. 6dB BW & 99% OBW Ant 2 (80MHz BW 11ax Index 0 – RU26 – Ch.155)

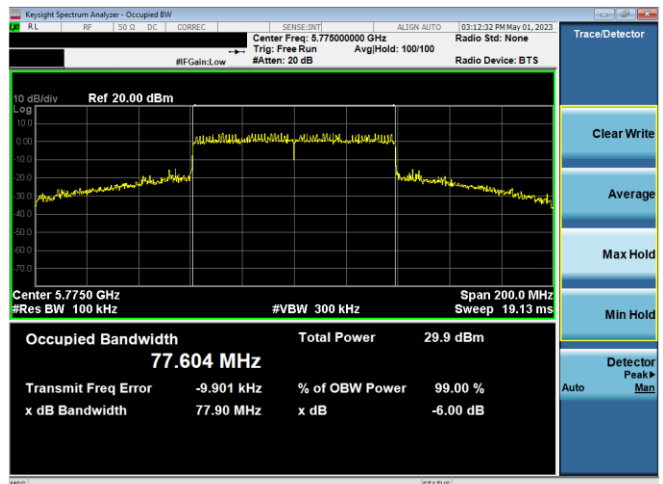

Plot 7-96. 6dB BW & 99% OBW Ant 2 (80MHz BW 11ax – RU996 – Ch.155)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 42 of 263

7.4 Conducted Output Power and Max EIRP Measurement – 802.11ax OFDMA

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 99% OBW per ISSED RSS-247 and 26dB BW is per FCC 15.407.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(19.74) = 23.95\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(18.55) = 23.68\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Subclause 12.3.3.2 Method PM-G
 KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G
 ANSI C63.10-2013 – Subclause 14.2 Measure-and-Sum Technique
 KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.
2. All RU's were investigated and RU 26 and fully-loaded RU were reported.
3. Additionally, the highest power among partially-loaded RU's was reported.
4. The "-" shown in the following power tables are used to denote N/A.
5. For 802.11ax, the worst case data rate was found to be MCS11.

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 43 of 263

V 10.5 12/15/2021

FCC Ant 1 Conducted Output Power Measurements (RU26)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5180	36	AVG	26	0	135/143.4 (MCS11)	10.73	23.98	-13.25
			AVG	26	4	135/143.4 (MCS11)	10.98	23.98	-13.00
			AVG	26	8	135/143.4 (MCS11)	10.81	23.98	-13.17
	5200	40	AVG	26	0	135/143.4 (MCS11)	10.76	23.98	-13.22
			AVG	26	4	135/143.4 (MCS11)	10.90	23.98	-13.08
			AVG	26	8	135/143.4 (MCS11)	10.72	23.98	-13.26
	5240	48	AVG	26	0	135/143.4 (MCS11)	10.89	23.98	-13.09
			AVG	26	4	135/143.4 (MCS11)	10.77	23.98	-13.21
			AVG	26	8	135/143.4 (MCS11)	10.98	23.98	-13.00
5745	149	AVG	26	0	135/143.4 (MCS11)	10.91	30.00	-19.09	
		AVG	26	4	135/143.4 (MCS11)	10.90	30.00	-19.10	
		AVG	26	8	135/143.4 (MCS11)	10.74	30.00	-19.26	
5785	157	AVG	26	0	135/143.4 (MCS11)	10.82	30.00	-19.18	
		AVG	26	4	135/143.4 (MCS11)	10.81	30.00	-19.19	
		AVG	26	8	135/143.4 (MCS11)	10.92	30.00	-19.08	
5825	165	AVG	26	0	135/143.4 (MCS11)	10.86	30.00	-19.14	
		AVG	26	4	135/143.4 (MCS11)	10.80	30.00	-19.20	
		AVG	26	8	135/143.4 (MCS11)	10.76	30.00	-19.24	


Table 7-12. FCC Ant 1 20MHz BW (UNII) Maximum Conducted Output Power (RU26)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5190	38	AVG	26	0	271/286.8 (MCS11)	10.94	23.98	-13.04
			AVG	26	8	271/286.8 (MCS11)	10.93	23.98	-13.05
			AVG	26	17	271/286.8 (MCS11)	10.89	23.98	-13.09
	5230	46	AVG	26	0	271/286.8 (MCS11)	10.92	23.98	-13.06
			AVG	26	8	271/286.8 (MCS11)	10.77	23.98	-13.21
			AVG	26	17	271/286.8 (MCS11)	10.81	23.98	-13.17
	5755	151	AVG	26	0	271/286.8 (MCS11)	10.92	30.00	-19.08
			AVG	26	8	271/286.8 (MCS11)	10.99	30.00	-19.01
			AVG	26	17	271/286.8 (MCS11)	10.87	30.00	-19.13
5795	159	AVG	26	0	271/286.8 (MCS11)	10.89	30.00	-19.11	
		AVG	26	8	271/286.8 (MCS11)	10.76	30.00	-19.24	
		AVG	26	17	271/286.8 (MCS11)	10.96	30.00	-19.04	

Table 7-13. FCC Ant 1 40MHz BW (UNII) Maximum Conducted Output Power (RU26)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5210	42	AVG	26	0	567/600.5 (MCS11)	8.95	23.98	-15.03
			AVG	26	18	567/600.5 (MCS11)	8.87	23.98	-15.11
			AVG	26	36	567/600.5 (MCS11)	8.78	23.98	-15.20
	5775	155	AVG	26	0	567/600.5 (MCS11)	10.92	30.00	-19.08
			AVG	26	18	567/600.5 (MCS11)	10.99	30.00	-19.01
AVG			26	36	567/600.5 (MCS11)	10.79	30.00	-19.21	

Table 7-14. FCC Ant 1 80MHz BW (UNII) Maximum Conducted Output Power (RU26)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 44 of 263

ISED Ant 1 Conducted Output Power Measurements (RU26)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5180	36	AVG	26	0	135/143.4 (MCS11)	6.91	-	-	3.30	10.21	22.77	-12.56
			AVG	26	4	135/143.4 (MCS11)	6.90	-	-	3.30	10.20	22.77	-12.57
			AVG	26	8	135/143.4 (MCS11)	6.99	-	-	3.30	10.29	22.77	-12.48
	5200	40	AVG	26	0	135/143.4 (MCS11)	6.94	-	-	3.30	10.24	22.77	-12.53
			AVG	26	4	135/143.4 (MCS11)	7.00	-	-	3.30	10.30	22.77	-12.47
			AVG	26	8	135/143.4 (MCS11)	6.91	-	-	3.30	10.21	22.77	-12.56
	5240	48	AVG	26	0	135/143.4 (MCS11)	6.93	-	-	3.30	10.23	22.77	-12.54
			AVG	26	4	135/143.4 (MCS11)	6.94	-	-	3.30	10.24	22.77	-12.53
			AVG	26	8	135/143.4 (MCS11)	6.90	-	-	3.30	10.20	22.77	-12.57
	5745	149	AVG	26	0	135/143.4 (MCS11)	10.91	30.00	-19.09	1.20	12.11	-	-
			AVG	26	4	135/143.4 (MCS11)	10.90	30.00	-19.10	1.20	12.10	-	-
			AVG	26	8	135/143.4 (MCS11)	10.74	30.00	-19.26	1.20	11.94	-	-
	5785	157	AVG	26	0	135/143.4 (MCS11)	10.82	30.00	-19.18	1.20	12.02	-	-
AVG			26	4	135/143.4 (MCS11)	10.81	30.00	-19.19	1.20	12.01	-	-	
AVG			26	8	135/143.4 (MCS11)	10.92	30.00	-19.08	1.20	12.12	-	-	
5825	165	AVG	26	0	135/143.4 (MCS11)	10.86	30.00	-19.14	1.20	12.06	-	-	
		AVG	26	4	135/143.4 (MCS11)	10.80	30.00	-19.20	1.20	12.00	-	-	
		AVG	26	8	135/143.4 (MCS11)	10.76	30.00	-19.24	1.20	11.96	-	-	

Table 7-15. ISED Ant 1 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5190	38	AVG	26	0	271/286.8 (MCS11)	6.94	-	-	3.30	10.24	22.77	-12.53
			AVG	26	8	271/286.8 (MCS11)	7.00	-	-	3.30	10.30	22.77	-12.47
			AVG	26	17	271/286.8 (MCS11)	6.91	-	-	3.30	10.21	22.77	-12.56
	5230	46	AVG	26	0	271/286.8 (MCS11)	6.95	-	-	3.30	10.25	22.77	-12.52
			AVG	26	8	271/286.8 (MCS11)	6.88	-	-	3.30	10.18	22.77	-12.59
			AVG	26	17	271/286.8 (MCS11)	6.80	-	-	3.30	10.10	22.77	-12.67
	5755	151	AVG	26	0	271/286.8 (MCS11)	10.92	30.00	-19.08	1.20	12.12	-	-
			AVG	26	8	271/286.8 (MCS11)	10.99	30.00	-19.01	1.20	12.19	-	-
			AVG	26	17	271/286.8 (MCS11)	10.87	30.00	-19.13	1.20	12.07	-	-
	5795	159	AVG	26	0	271/286.8 (MCS11)	10.89	30.00	-19.11	1.20	12.09	-	-
			AVG	26	8	271/286.8 (MCS11)	10.76	30.00	-19.24	1.20	11.96	-	-
			AVG	26	17	271/286.8 (MCS11)	10.96	30.00	-19.04	1.20	12.16	-	-

Table 7-16. ISED Ant 1 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5210	42	AVG	26	0	567/600.5 (MCS11)	6.94	-	-	3.30	10.24	22.77	-12.53
			AVG	26	18	567/600.5 (MCS11)	7.00	-	-	3.30	10.30	22.77	-12.47
			AVG	26	36	567/600.5 (MCS11)	6.96	-	-	3.30	10.26	22.77	-12.51
	5775	155	AVG	26	0	567/600.5 (MCS11)	10.92	30.00	-19.08	1.20	12.12	-	-
			AVG	26	18	567/600.5 (MCS11)	10.99	30.00	-19.01	1.20	12.19	-	-
AVG			26	36	567/600.5 (MCS11)	10.79	30.00	-19.21	1.20	11.99	-	-	

Table 7-17. ISED Ant 1 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 45 of 263

FCC Ant 1 Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5260	52	AVG	52	37	135/143.4 (MCS11)	13.95	23.95	-10.00
			AVG	52	39	135/143.4 (MCS11)	13.96	23.95	-9.99
			AVG	52	40	135/143.4 (MCS11)	13.92	23.95	-10.03
	5300	60	AVG	52	37	135/143.4 (MCS11)	14.00	23.95	-9.95
			AVG	52	39	135/143.4 (MCS11)	13.98	23.95	-9.97
			AVG	52	40	135/143.4 (MCS11)	13.99	23.95	-9.96
	5320	64	AVG	52	37	135/143.4 (MCS11)	14.00	23.95	-9.95
			AVG	52	39	135/143.4 (MCS11)	14.00	23.95	-9.95
			AVG	52	40	135/143.4 (MCS11)	13.93	23.95	-10.02
5500	100	AVG	52	37	135/143.4 (MCS11)	13.90	23.68	-9.78	
		AVG	52	39	135/143.4 (MCS11)	14.00	23.68	-9.68	
		AVG	52	40	135/143.4 (MCS11)	13.90	23.68	-9.78	
5580	116	AVG	52	37	135/143.4 (MCS11)	13.95	23.68	-9.73	
		AVG	52	39	135/143.4 (MCS11)	13.99	23.68	-9.69	
		AVG	52	40	135/143.4 (MCS11)	13.97	23.68	-9.71	
5720	144	AVG	52	37	135/143.4 (MCS11)	14.00	23.68	-9.68	
		AVG	52	39	135/143.4 (MCS11)	13.97	23.68	-9.71	
		AVG	52	40	135/143.4 (MCS11)	13.78	23.68	-9.90	

Table 7-18. FCC Ant 1 20MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5270	54	AVG	52	37	271/286.8 (MCS11)	13.90	23.95	-10.05
			AVG	52	40	271/286.8 (MCS11)	13.88	23.95	-10.07
			AVG	52	44	271/286.8 (MCS11)	14.00	23.95	-9.95
	5310	62	AVG	52	37	271/286.8 (MCS11)	11.90	23.95	-12.05
			AVG	52	40	271/286.8 (MCS11)	11.88	23.95	-12.07
			AVG	52	44	271/286.8 (MCS11)	11.80	23.95	-12.15
	5510	102	AVG	52	37	271/286.8 (MCS11)	11.97	23.68	-11.71
			AVG	52	40	271/286.8 (MCS11)	12.00	23.68	-11.68
			AVG	52	44	271/286.8 (MCS11)	12.00	23.68	-11.68
5550	110	AVG	52	37	271/286.8 (MCS11)	13.95	23.68	-9.73	
		AVG	52	40	271/286.8 (MCS11)	13.98	23.68	-9.70	
		AVG	52	44	271/286.8 (MCS11)	14.00	23.68	-9.68	
5710	142	AVG	52	37	271/286.8 (MCS11)	13.99	23.68	-9.69	
		AVG	52	40	271/286.8 (MCS11)	13.92	23.68	-9.76	
		AVG	52	44	271/286.8 (MCS11)	13.99	23.68	-9.69	

Table 7-19. FCC Ant 1 40MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 46 of 263

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5290	58	AVG	52	37	567/600.5 (MCS11)	11.83	23.95	-12.12
			AVG	52	44	567/600.5 (MCS11)	11.82	23.95	-12.13
			AVG	52	52	567/600.5 (MCS11)	11.96	23.95	-11.99
	5530	106	AVG	52	37	567/600.5 (MCS11)	11.82	23.68	-11.86
			AVG	52	44	567/600.5 (MCS11)	11.94	23.68	-11.74
			AVG	52	52	567/600.5 (MCS11)	11.77	23.68	-11.91
	5610	122	AVG	52	37	567/600.5 (MCS11)	13.95	23.68	-9.73
			AVG	52	44	567/600.5 (MCS11)	13.90	23.68	-9.78
			AVG	52	52	567/600.5 (MCS11)	14.00	23.68	-9.68
5690	138	AVG	52	37	567/600.5 (MCS11)	13.96	23.68	-9.72	
		AVG	52	44	567/600.5 (MCS11)	13.88	23.68	-9.80	
		AVG	52	52	567/600.5 (MCS11)	13.75	23.68	-9.93	

Table 7-20. FCC Ant 1 80MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 47 of 263

ISED Ant 1 Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5260	52	AVG	52	37	135/143.4 (MCS11)	13.95	23.95	-10.00	3.40	17.35	29.95	-12.60
			AVG	52	39	135/143.4 (MCS11)	13.96	23.95	-9.99	3.40	17.36	29.95	-12.59
			AVG	52	40	135/143.4 (MCS11)	13.92	23.95	-10.03	3.40	17.32	29.95	-12.63
	5300	60	AVG	52	37	135/143.4 (MCS11)	14.00	23.95	-9.95	3.40	17.40	29.95	-12.55
			AVG	52	39	135/143.4 (MCS11)	13.98	23.95	-9.97	3.40	17.38	29.95	-12.57
			AVG	52	40	135/143.4 (MCS11)	13.99	23.95	-9.96	3.40	17.39	29.95	-12.56
	5320	64	AVG	52	37	135/143.4 (MCS11)	14.00	23.95	-9.95	3.40	17.40	29.95	-12.55
			AVG	52	39	135/143.4 (MCS11)	14.00	23.95	-9.95	3.40	17.40	29.95	-12.55
			AVG	52	40	135/143.4 (MCS11)	13.93	23.95	-10.02	3.40	17.33	29.95	-12.62
	5500	100	AVG	52	37	135/143.4 (MCS11)	13.90	23.68	-9.78	2.60	16.50	29.68	-13.18
			AVG	52	39	135/143.4 (MCS11)	14.00	23.68	-9.68	2.60	16.60	29.68	-13.08
			AVG	52	40	135/143.4 (MCS11)	13.90	23.68	-9.78	2.60	16.50	29.68	-13.18
	5580	116	AVG	52	37	135/143.4 (MCS11)	13.95	23.68	-9.73	2.60	16.55	29.68	-13.13
AVG			52	39	135/143.4 (MCS11)	13.99	23.68	-9.69	2.60	16.59	29.68	-13.09	
AVG			52	40	135/143.4 (MCS11)	13.97	23.68	-9.71	2.60	16.57	29.68	-13.11	
5720	144	AVG	52	37	135/143.4 (MCS11)	14.00	23.68	-9.68	2.60	16.60	29.68	-13.08	
		AVG	52	39	135/143.4 (MCS11)	13.97	23.68	-9.71	2.60	16.57	29.68	-13.11	
		AVG	52	40	135/143.4 (MCS11)	13.78	23.68	-9.90	2.60	16.38	29.68	-13.30	

Table 7-21. ISED Ant 1 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5270	54	AVG	52	37	271/286.8 (MCS11)	13.90	23.95	-10.05	3.40	17.30	29.95	-12.65
			AVG	52	40	271/286.8 (MCS11)	13.88	23.95	-10.07	3.40	17.28	29.95	-12.67
			AVG	52	44	271/286.8 (MCS11)	14.00	23.95	-9.95	3.40	17.40	29.95	-12.55
	5310	62	AVG	52	37	271/286.8 (MCS11)	11.90	23.95	-12.05	3.40	15.30	29.95	-14.65
			AVG	52	40	271/286.8 (MCS11)	11.88	23.95	-12.07	3.40	15.28	29.95	-14.67
			AVG	52	44	271/286.8 (MCS11)	11.80	23.95	-12.15	3.40	15.20	29.95	-14.75
	5510	102	AVG	52	37	271/286.8 (MCS11)	11.97	23.68	-11.71	2.60	14.57	29.68	-15.11
			AVG	52	40	271/286.8 (MCS11)	12.00	23.68	-11.68	2.60	14.60	29.68	-15.08
			AVG	52	44	271/286.8 (MCS11)	12.00	23.68	-11.68	2.60	14.60	29.68	-15.08
	5550	110	AVG	52	37	271/286.8 (MCS11)	13.95	23.68	-9.73	2.60	16.55	29.68	-13.13
			AVG	52	40	271/286.8 (MCS11)	13.98	23.68	-9.70	2.60	16.58	29.68	-13.10
			AVG	52	44	271/286.8 (MCS11)	14.00	23.68	-9.68	2.60	16.60	29.68	-13.08
	5710	142	AVG	52	37	271/286.8 (MCS11)	13.99	23.68	-9.69	2.60	16.59	29.68	-13.09
AVG			52	40	271/286.8 (MCS11)	13.92	23.68	-9.76	2.60	16.52	29.68	-13.16	
AVG			52	44	271/286.8 (MCS11)	13.99	23.68	-9.69	2.60	16.59	29.68	-13.09	

Table 7-22. ISED Ant 1 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5290	58	AVG	52	37	567/600.5 (MCS11)	11.83	23.95	-12.12	3.40	15.23	29.95	-14.72
			AVG	52	44	567/600.5 (MCS11)	11.82	23.95	-12.13	3.40	15.22	29.95	-14.73
			AVG	52	52	567/600.5 (MCS11)	11.96	23.95	-11.99	3.40	15.36	29.95	-14.59
	5530	106	AVG	52	37	567/600.5 (MCS11)	11.82	23.68	-11.86	2.60	14.42	29.68	-15.26
			AVG	52	44	567/600.5 (MCS11)	11.94	23.68	-11.74	2.60	14.54	29.68	-15.14
			AVG	52	52	567/600.5 (MCS11)	11.77	23.68	-11.91	2.60	14.37	29.68	-15.31
	5690	138	AVG	52	37	567/600.5 (MCS11)	13.96	23.68	-9.72	2.60	16.56	29.68	-13.12
			AVG	52	44	567/600.5 (MCS11)	13.88	23.68	-9.80	2.60	16.48	29.68	-13.20
	AVG	52	52	567/600.5 (MCS11)	13.75	23.68	-9.93	2.60	16.35	29.68	-13.33		


Table 7-23. ISED Ant 1 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 48 of 263

FCC Ant 1 Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5180	36	AVG	106	53	135/143.4 (MCS11)	16.84	23.98	-7.14
			AVG	106	54	135/143.4 (MCS11)	16.89	23.98	-7.09
	5200	40	AVG	106	53	135/143.4 (MCS11)	16.98	23.98	-7.00
			AVG	106	54	135/143.4 (MCS11)	16.90	23.98	-7.08
	5240	48	AVG	106	53	135/143.4 (MCS11)	16.98	23.98	-7.00
			AVG	106	54	135/143.4 (MCS11)	16.94	23.98	-7.04
	5260	52	AVG	106	53	135/143.4 (MCS11)	17.00	23.95	-6.95
			AVG	106	54	135/143.4 (MCS11)	16.91	23.95	-7.04
	5300	60	AVG	106	53	135/143.4 (MCS11)	17.00	23.95	-6.95
			AVG	106	54	135/143.4 (MCS11)	17.00	23.95	-6.95
	5320	64	AVG	106	53	135/143.4 (MCS11)	16.99	23.95	-6.96
			AVG	106	54	135/143.4 (MCS11)	16.90	23.95	-7.05
	5500	100	AVG	106	53	135/143.4 (MCS11)	16.99	23.68	-6.69
			AVG	106	54	135/143.4 (MCS11)	16.87	23.68	-6.81
5580	116	AVG	106	53	135/143.4 (MCS11)	16.97	23.68	-6.71	
		AVG	106	54	135/143.4 (MCS11)	16.94	23.68	-6.74	
5720	144	AVG	106	53	135/143.4 (MCS11)	16.91	23.68	-6.77	
		AVG	106	54	135/143.4 (MCS11)	17.00	23.68	-6.68	
5745	149	AVG	106	53	135/143.4 (MCS11)	16.80	30.00	-13.20	
		AVG	106	54	135/143.4 (MCS11)	16.85	30.00	-13.15	
5785	157	AVG	106	53	135/143.4 (MCS11)	16.85	30.00	-13.15	
		AVG	106	54	135/143.4 (MCS11)	16.92	30.00	-13.08	
5825	165	AVG	106	53	135/143.4 (MCS11)	16.90	30.00	-13.10	
		AVG	106	54	135/143.4 (MCS11)	16.82	30.00	-13.18	

Table 7-24. FCC Ant 1 20MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 49 of 263

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5190	38	AVG	106	53	271/286.8 (MCS11)	16.96	23.98	-7.02
			AVG	106	54	271/286.8 (MCS11)	16.84	23.98	-7.14
			AVG	106	56	271/286.8 (MCS11)	16.82	23.98	-7.16
	5230	46	AVG	242	61	271/286.8 (MCS11)	19.33	23.98	-4.65
			AVG	242	62	271/286.8 (MCS11)	19.28	23.98	-4.70
	5270	54	AVG	242	61	271/286.8 (MCS11)	19.42	23.95	-4.53
			AVG	242	62	271/286.8 (MCS11)	19.46	23.95	-4.49
	5310	62	AVG	242	61	271/286.8 (MCS11)	17.49	23.95	-6.46
			AVG	242	62	271/286.8 (MCS11)	17.40	23.95	-6.55
	5510	102	AVG	242	61	271/286.8 (MCS11)	15.50	23.68	-8.18
			AVG	242	62	271/286.8 (MCS11)	15.29	23.68	-8.39
	5550	110	AVG	242	61	271/286.8 (MCS11)	19.36	23.68	-4.32
			AVG	242	62	271/286.8 (MCS11)	19.47	23.68	-4.21
	5590	118	AVG	242	61	271/286.8 (MCS11)	19.40	23.68	-4.28
AVG			242	62	271/286.8 (MCS11)	19.44	23.68	-4.24	
5670	134	AVG	242	61	271/286.8 (MCS11)	19.42	23.68	-4.26	
		AVG	242	62	271/286.8 (MCS11)	19.25	23.68	-4.43	
5710	142	AVG	106	53	271/286.8 (MCS11)	16.96	23.68	-6.72	
		AVG	106	54	271/286.8 (MCS11)	16.88	23.68	-6.80	
		AVG	106	56	271/286.8 (MCS11)	16.83	23.68	-6.85	
5755	151	AVG	242	61	271/286.8 (MCS11)	19.94	30.00	-10.06	
		AVG	242	62	271/286.8 (MCS11)	19.81	30.00	-10.19	
5795	159	AVG	242	61	271/286.8 (MCS11)	19.93	30.00	-10.07	
		AVG	242	62	271/286.8 (MCS11)	19.84	30.00	-10.16	

Table 7-25. FCC Ant 1 40MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5210	42	AVG	242	61	567/600.5 (MCS11)	15.79	23.98	-8.19
			AVG	242	62	567/600.5 (MCS11)	15.83	23.98	-8.15
			AVG	242	64	567/600.5 (MCS11)	15.93	23.98	-8.05
	5290	58	AVG	242	61	567/600.5 (MCS11)	17.31	23.95	-6.64
			AVG	242	62	567/600.5 (MCS11)	17.42	23.95	-6.53
			AVG	242	64	567/600.5 (MCS11)	17.34	23.95	-6.61
	5530	106	AVG	242	61	567/600.5 (MCS11)	15.24	23.68	-8.44
			AVG	242	62	567/600.5 (MCS11)	15.36	23.68	-8.32
			AVG	242	64	567/600.5 (MCS11)	15.49	23.68	-8.19
	5610	122	AVG	484	65	567/600.5 (MCS11)	19.82	23.68	-3.86
			AVG	484	66	567/600.5 (MCS11)	19.97	23.68	-3.71
	5690	138	AVG	484	65	567/600.5 (MCS11)	17.11	23.68	-6.57
			AVG	484	66	567/600.5 (MCS11)	16.97	23.68	-6.71
	5775	155	AVG	484	65	567/600.5 (MCS11)	19.78	30.00	-10.22
AVG			484	66	567/600.5 (MCS11)	19.82	30.00	-10.18	

Table 7-26. FCC Ant 1 80MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 50 of 263

ISED Ant 1 Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
		5180	36	AVG	106	53	135/143.4 (MCS11)	13.00	-	-	3.30	16.30	22.77
			AVG	106	54	135/143.4 (MCS11)	13.00	-	-	3.30	16.30	22.77	-6.47
	5200	40	AVG	106	53	135/143.4 (MCS11)	13.00	-	-	3.30	16.30	22.77	-6.47
			AVG	106	54	135/143.4 (MCS11)	12.90	-	-	3.30	16.20	22.77	-6.57
	5240	48	AVG	106	53	135/143.4 (MCS11)	12.93	-	-	3.30	16.23	22.77	-6.54
			AVG	106	54	135/143.4 (MCS11)	12.92	-	-	3.30	16.22	22.77	-6.55
	5260	52	AVG	106	53	135/143.4 (MCS11)	17.00	23.95	-6.95	3.40	20.40	29.95	-9.55
			AVG	106	54	135/143.4 (MCS11)	16.91	23.95	-7.04	3.40	20.31	29.95	-9.64
	5300	60	AVG	106	53	135/143.4 (MCS11)	17.00	23.95	-6.95	3.40	20.40	29.95	-9.55
			AVG	106	54	135/143.4 (MCS11)	17.00	23.95	-6.95	3.40	20.40	29.95	-9.55
	5320	64	AVG	106	53	135/143.4 (MCS11)	16.99	23.95	-6.96	3.40	20.39	29.95	-9.56
			AVG	106	54	135/143.4 (MCS11)	16.90	23.95	-7.05	3.40	20.30	29.95	-9.65
	5500	100	AVG	106	53	135/143.4 (MCS11)	16.99	23.68	-6.69	2.60	19.59	29.68	-10.09
			AVG	106	54	135/143.4 (MCS11)	16.87	23.68	-6.81	2.60	19.47	29.68	-10.21
	5580	116	AVG	106	53	135/143.4 (MCS11)	16.97	23.68	-6.71	2.60	19.57	29.68	-10.11
			AVG	106	54	135/143.4 (MCS11)	16.94	23.68	-6.74	2.60	19.54	29.68	-10.14
	5720	144	AVG	106	53	135/143.4 (MCS11)	16.91	23.68	-6.77	2.60	19.51	29.68	-10.17
			AVG	106	54	135/143.4 (MCS11)	17.00	23.68	-6.68	2.60	19.60	29.68	-10.08
	5745	149	AVG	106	53	135/143.4 (MCS11)	16.80	30.00	-13.20	1.20	18.00	-	-
			AVG	106	54	135/143.4 (MCS11)	16.85	30.00	-13.15	1.20	18.05	-	-
	5785	157	AVG	106	53	135/143.4 (MCS11)	16.85	30.00	-13.15	1.20	18.05	-	-
			AVG	106	54	135/143.4 (MCS11)	16.92	30.00	-13.08	1.20	18.12	-	-
	5825	165	AVG	106	53	135/143.4 (MCS11)	16.90	30.00	-13.10	1.20	18.10	-	-
			AVG	106	54	135/143.4 (MCS11)	16.82	30.00	-13.18	1.20	18.02	-	-

Table 7-27. ISED Ant 1 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
		5190	38	AVG	242	61	271/286.8 (MCS11)	14.89	-	-	3.30	18.19	22.77
			AVG	242	62	271/286.8 (MCS11)	15.00	-	-	3.30	18.30	22.77	-4.47
	5230	46	AVG	242	61	271/286.8 (MCS11)	14.92	-	-	3.30	18.22	22.77	-4.55
			AVG	242	62	271/286.8 (MCS11)	14.90	-	-	3.30	18.20	22.77	-4.57
	5270	54	AVG	242	61	271/286.8 (MCS11)	19.42	23.95	-4.53	3.40	22.82	29.95	-7.13
			AVG	242	62	271/286.8 (MCS11)	19.46	23.95	-4.49	3.40	22.86	29.95	-7.09
	5310	62	AVG	242	61	271/286.8 (MCS11)	17.49	23.95	-6.46	3.40	20.89	29.95	-9.06
			AVG	242	62	271/286.8 (MCS11)	17.40	23.95	-6.55	3.40	20.80	29.95	-9.15
	5510	102	AVG	242	61	271/286.8 (MCS11)	15.50	23.68	-8.18	2.60	18.10	29.68	-11.58
			AVG	242	62	271/286.8 (MCS11)	15.29	23.68	-8.39	2.60	17.89	29.68	-11.79
	5550	110	AVG	242	61	271/286.8 (MCS11)	19.36	23.68	-4.32	2.60	21.96	29.68	-7.72
			AVG	242	62	271/286.8 (MCS11)	19.47	23.68	-4.21	2.60	22.07	29.68	-7.61
	5670	134	AVG	242	61	271/286.8 (MCS11)	19.42	23.68	-4.26	2.60	22.02	29.68	-7.66
			AVG	242	62	271/286.8 (MCS11)	19.25	23.68	-4.43	2.60	21.85	29.68	-7.83
	5710	142	AVG	106	53	271/286.8 (MCS11)	16.96	23.68	-6.72	2.60	19.56	29.68	-10.12
			AVG	106	54	271/286.8 (MCS11)	16.88	23.68	-6.80	2.60	19.48	29.68	-10.20
			AVG	106	56	271/286.8 (MCS11)	16.83	23.68	-6.85	2.60	19.43	29.68	-10.25
	5755	151	AVG	242	61	271/286.8 (MCS11)	19.94	30.00	-10.06	1.20	21.14	-	-
			AVG	242	62	271/286.8 (MCS11)	19.81	30.00	-10.19	1.20	21.01	-	-
	5795	159	AVG	242	61	271/286.8 (MCS11)	19.93	30.00	-10.07	1.20	21.13	-	-
			AVG	242	62	271/286.8 (MCS11)	19.84	30.00	-10.16	1.20	21.04	-	-

Table 7-28. ISED Ant 1 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
		5210	42	AVG	242	61	567/600.5 (MCS11)	15.00	-	-	3.30	18.30	22.77
			AVG	242	62	567/600.5 (MCS11)	14.85	-	-	3.30	18.15	22.77	-4.62
			AVG	242	64	567/600.5 (MCS11)	14.90	-	-	3.30	18.20	22.77	-4.57
	5290	58	AVG	242	61	567/600.5 (MCS11)	17.31	23.95	-6.64	3.40	20.71	29.95	-9.24
			AVG	242	62	567/600.5 (MCS11)	17.42	23.95	-6.53	3.40	20.82	29.95	-9.13
			AVG	242	64	567/600.5 (MCS11)	17.34	23.95	-6.61	3.40	20.74	29.95	-9.21
	5530	106	AVG	242	61	567/600.5 (MCS11)	15.24	23.68	-8.44	2.60	17.84	29.68	-11.84
			AVG	242	62	567/600.5 (MCS11)	15.36	23.68	-8.32	2.60	17.96	29.68	-11.72
			AVG	242	64	567/600.5 (MCS11)	15.49	23.68	-8.19	2.60	18.09	29.68	-11.59
	5690	138	AVG	484	65	567/600.5 (MCS11)	17.11	23.68	-6.57	2.60	19.71	29.68	-9.97
			AVG	484	66	567/600.5 (MCS11)	16.97	23.68	-6.71	2.60	19.57	29.68	-10.11
	5775	155	AVG	484	65	567/600.5 (MCS11)	19.78	30.00	-10.22	1.20	20.98	-	-
			AVG	484	66	567/600.5 (MCS11)	19.82	30.00	-10.18	1.20	21.02	-	-

Table 7-29. ISED Ant 1 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 51 of 263

FCC Ant 1 Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5180	36	AVG	242	61	135/143.4 (MCS11)	15.97	23.98	-8.01
	5200	40	AVG	242	61	135/143.4 (MCS11)	19.32	23.98	-4.66
	5240	48	AVG	242	61	135/143.4 (MCS11)	19.37	23.98	-4.61
	5260	52	AVG	242	61	135/143.4 (MCS11)	19.45	23.95	-4.50
	5300	60	AVG	242	61	135/143.4 (MCS11)	19.43	23.95	-4.52
	5320	64	AVG	242	61	135/143.4 (MCS11)	17.46	23.95	-6.49
	5500	100	AVG	242	61	135/143.4 (MCS11)	15.48	23.68	-8.20
	5520	104	AVG	242	61	135/143.4 (MCS11)	19.10	23.68	-4.58
	5540	108	AVG	242	61	135/143.4 (MCS11)	19.49	23.68	-4.19
	5580	116	AVG	242	61	135/143.4 (MCS11)	19.30	23.68	-4.38
	5680	136	AVG	242	61	135/143.4 (MCS11)	19.34	23.68	-4.34
	5700	140	AVG	242	61	135/143.4 (MCS11)	16.05	23.68	-7.63
	5720	144	AVG	242	61	135/143.4 (MCS11)	19.44	23.68	-4.24
	5745	149	AVG	242	61	135/143.4 (MCS11)	19.97	30.00	-10.03
5785	157	AVG	242	61	135/143.4 (MCS11)	19.88	30.00	-10.12	
5825	165	AVG	242	61	135/143.4 (MCS11)	19.85	30.00	-10.15	

Table 7-30. FCC Ant 1 20MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5190	38	AVG	484	65	271/286.8 (MCS11)	12.35	23.98	-11.63
	5230	46	AVG	484	65	271/286.8 (MCS11)	19.21	23.98	-4.77
	5270	54	AVG	484	65	271/286.8 (MCS11)	19.86	23.95	-4.09
	5310	62	AVG	484	65	271/286.8 (MCS11)	14.48	23.95	-9.47
	5510	102	AVG	484	65	271/286.8 (MCS11)	13.00	23.68	-10.68
	5550	110	AVG	484	65	271/286.8 (MCS11)	19.81	23.68	-3.87
	5630	126	AVG	484	65	271/286.8 (MCS11)	19.77	23.68	-3.91
	5670	134	AVG	484	65	271/286.8 (MCS11)	17.04	23.68	-6.64
	5710	142	AVG	484	65	271/286.8 (MCS11)	19.96	23.68	-3.72
	5755	151	AVG	484	65	271/286.8 (MCS11)	19.84	30.00	-10.16
	5795	159	AVG	484	65	271/286.8 (MCS11)	19.95	30.00	-10.05

Table 7-31. FCC Ant 1 40MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5210	42	AVG	996	67	567/600.5 (MCS11)	11.43	23.98	-12.55
	5290	58	AVG	996	67	567/600.5 (MCS11)	10.87	23.95	-13.08
	5530	106	AVG	996	67	567/600.5 (MCS11)	13.54	23.68	-10.14
	5610	122	AVG	996	67	567/600.5 (MCS11)	17.27	23.68	-6.41
	5690	138	AVG	996	67	567/600.5 (MCS11)	19.80	23.68	-3.88
5775	155	AVG	996	67	567/600.5 (MCS11)	17.62	30.00	-12.38	

Table 7-32. FCC Ant 1 80MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 52 of 263

ISED Ant 1 Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5180	36	AVG	242	61	135/143.4 (MCS11)	15.00	-	-	3.30	18.30	22.77	-4.47
	5200	40	AVG	242	61	135/143.4 (MCS11)	14.94	-	-	3.30	18.24	22.77	-4.53
	5240	48	AVG	242	61	135/143.4 (MCS11)	14.98	-	-	3.30	18.28	22.77	-4.49
	5260	52	AVG	242	61	135/143.4 (MCS11)	19.45	23.95	-4.50	3.40	22.85	29.95	-7.10
	5300	60	AVG	242	61	135/143.4 (MCS11)	19.43	23.95	-4.52	3.40	22.83	29.95	-7.12
	5320	64	AVG	242	61	135/143.4 (MCS11)	17.46	23.95	-6.49	3.40	20.86	29.95	-9.09
	5500	100	AVG	242	61	135/143.4 (MCS11)	15.48	23.68	-8.20	2.60	18.08	29.68	-11.60
	5520	104	AVG	242	61	135/143.4 (MCS11)	19.10	23.68	-4.58	2.60	21.70	29.68	-7.98
	5540	108	AVG	242	61	135/143.4 (MCS11)	19.49	23.68	-4.19	2.60	22.09	29.68	-7.59
	5580	116	AVG	242	61	135/143.4 (MCS11)	19.30	23.68	-4.38	2.60	21.90	29.68	-7.78
	5680	136	AVG	242	61	135/143.4 (MCS11)	19.34	23.68	-4.34	2.60	21.94	29.68	-7.74
	5700	140	AVG	242	61	135/143.4 (MCS11)	16.05	23.68	-7.63	2.60	18.65	29.68	-11.03
	5720	144	AVG	242	61	135/143.4 (MCS11)	19.44	23.68	-4.24	2.60	22.04	29.68	-7.64
	5745	149	AVG	242	61	135/143.4 (MCS11)	19.97	30.00	-10.03	1.20	21.17	-	-
	5785	157	AVG	242	61	135/143.4 (MCS11)	19.88	30.00	-10.12	1.20	21.08	-	-
5825	165	AVG	242	61	135/143.4 (MCS11)	19.85	30.00	-10.15	1.20	21.05	-	-	

Table 7-33. ISED Ant 1 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5190	38	AVG	484	65	271/286.8 (MCS11)	12.40	-	-	3.30	15.70	22.77	-7.07
	5230	46	AVG	484	65	271/286.8 (MCS11)	17.44	-	-	3.30	20.74	22.77	-2.03
	5270	54	AVG	484	65	271/286.8 (MCS11)	19.86	23.95	-4.09	3.40	23.26	29.95	-6.69
	5310	62	AVG	484	65	271/286.8 (MCS11)	14.48	23.95	-9.47	3.40	17.88	29.95	-12.07
	5510	102	AVG	484	65	271/286.8 (MCS11)	13.00	23.68	-10.68	2.60	15.60	29.68	-14.08
	5550	110	AVG	484	65	271/286.8 (MCS11)	19.81	23.68	-3.87	2.60	22.41	29.68	-7.27
	5670	134	AVG	484	65	271/286.8 (MCS11)	17.04	23.68	-6.64	2.60	19.64	29.68	-10.04
	5710	142	AVG	484	65	271/286.8 (MCS11)	19.96	23.68	-3.72	2.60	22.56	29.68	-7.12
	5755	151	AVG	484	65	271/286.8 (MCS11)	19.84	30.00	-10.16	1.20	21.04	-	-
	5795	159	AVG	484	65	271/286.8 (MCS11)	19.95	30.00	-10.05	1.20	21.15	-	-

Table 7-34. ISED Ant 1 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5210	42	AVG	996	67	567/600.5 (MCS11)	11.00	-	-	3.30	14.30	22.77	-8.47
	5290	58	AVG	996	67	567/600.5 (MCS11)	10.87	23.95	-13.08	3.40	14.27	29.95	-15.68
	5530	106	AVG	996	67	567/600.5 (MCS11)	13.54	23.68	-10.14	2.60	16.14	29.68	-13.54
	5690	138	AVG	996	67	567/600.5 (MCS11)	19.80	23.68	-3.88	2.60	22.40	29.68	-7.28
5775	155	AVG	996	67	567/600.5 (MCS11)	17.62	30.00	-12.38	1.20	18.82	-	-	

Table 7-35. ISED Ant 1 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 53 of 263

FCC Ant 2 Conducted Output Power Measurements (RU26)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5180	36	AVG	26	0	135/143.4 (MCS11)	10.73	23.98	-13.25
			AVG	26	4	135/143.4 (MCS11)	10.70	23.98	-13.28
			AVG	26	8	135/143.4 (MCS11)	10.95	23.98	-13.03
	5200	40	AVG	26	0	135/143.4 (MCS11)	10.86	23.98	-13.12
			AVG	26	4	135/143.4 (MCS11)	10.80	23.98	-13.18
			AVG	26	8	135/143.4 (MCS11)	10.84	23.98	-13.14
	5240	48	AVG	26	0	135/143.4 (MCS11)	10.96	23.98	-13.02
			AVG	26	4	135/143.4 (MCS11)	10.78	23.98	-13.20
			AVG	26	8	135/143.4 (MCS11)	10.93	23.98	-13.05
5745	149	AVG	26	0	135/143.4 (MCS11)	10.95	30.00	-19.05	
		AVG	27	4	135/143.4 (MCS11)	10.96	30.00	-19.04	
		AVG	28	8	135/143.4 (MCS11)	10.99	30.00	-19.01	
5785	157	AVG	29	0	135/143.4 (MCS11)	10.98	30.00	-19.02	
		AVG	30	4	135/143.4 (MCS11)	10.95	30.00	-19.05	
		AVG	31	8	135/143.4 (MCS11)	11.00	30.00	-19.00	
5825	165	AVG	32	0	135/143.4 (MCS11)	10.99	30.00	-19.01	
		AVG	33	4	135/143.4 (MCS11)	10.76	30.00	-19.24	
		AVG	34	8	135/143.4 (MCS11)	10.86	30.00	-19.14	

Table 7-36. FCC Ant 2 20MHz BW (UNII) Maximum Conducted Output Power (RU26)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5190	38	AVG	26	0	271/286.8 (MCS11)	10.88	23.98	-13.10
			AVG	26	8	271/286.8 (MCS11)	11.00	23.98	-12.98
			AVG	26	17	271/286.8 (MCS11)	10.91	23.98	-13.07
	5230	46	AVG	26	0	271/286.8 (MCS11)	10.80	23.98	-13.18
			AVG	26	8	271/286.8 (MCS11)	10.95	23.98	-13.03
			AVG	26	17	271/286.8 (MCS11)	10.95	23.98	-13.03
	5755	151	AVG	26	0	271/286.8 (MCS11)	11.00	30.00	-19.00
			AVG	26	8	271/286.8 (MCS11)	10.92	30.00	-19.08
			AVG	26	17	271/286.8 (MCS11)	11.00	30.00	-19.00
5795	159	AVG	26	0	271/286.8 (MCS11)	10.94	30.00	-19.06	
		AVG	26	8	271/286.8 (MCS11)	10.87	30.00	-19.13	
		AVG	26	17	271/286.8 (MCS11)	10.90	30.00	-19.10	

Table 7-37. FCC Ant 2 40MHz BW (UNII) Maximum Conducted Output Power (RU26)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5210	42	AVG	26	0	567/600.5 (MCS11)	9.00	23.98	-14.98
			AVG	26	18	567/600.5 (MCS11)	8.99	23.98	-14.99
			AVG	26	36	567/600.5 (MCS11)	9.00	23.98	-14.98
	5775	155	AVG	26	0	567/600.5 (MCS11)	10.99	30.00	-19.01
			AVG	26	18	567/600.5 (MCS11)	10.98	30.00	-19.02
AVG			26	36	567/600.5 (MCS11)	10.90	30.00	-19.10	

Table 7-38. FCC Ant 2 80MHz BW (UNII) Maximum Conducted Output Power (RU26)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 54 of 263

ISED Ant 2 Conducted Output Power Measurements (RU26)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5180	36	AVG	26	0	135/143.4 (MCS11)	6.80	-	-	2.50	9.30	22.77	-13.47
			AVG	26	4	135/143.4 (MCS11)	6.72	-	-	2.50	9.22	22.77	-13.55
			AVG	26	8	135/143.4 (MCS11)	6.93	-	-	2.50	9.43	22.77	-13.34
	5200	40	AVG	26	0	135/143.4 (MCS11)	6.97	-	-	2.50	9.47	22.77	-13.30
			AVG	26	4	135/143.4 (MCS11)	6.88	-	-	2.50	9.38	22.77	-13.39
			AVG	26	8	135/143.4 (MCS11)	7.00	-	-	2.50	9.50	22.77	-13.27
	5240	48	AVG	26	0	135/143.4 (MCS11)	6.83	-	-	2.50	9.33	22.77	-13.44
			AVG	26	4	135/143.4 (MCS11)	6.97	-	-	2.50	9.47	22.77	-13.30
			AVG	26	8	135/143.4 (MCS11)	6.91	-	-	2.50	9.41	22.77	-13.36
	5745	149	AVG	26	0	135/143.4 (MCS11)	10.95	30.00	-19.05	2.30	13.25	-	-
			AVG	26	4	135/143.4 (MCS11)	10.96	30.00	-19.04	2.30	13.26	-	-
			AVG	26	8	135/143.4 (MCS11)	10.99	30.00	-19.01	2.30	13.29	-	-
	5785	157	AVG	26	0	135/143.4 (MCS11)	10.98	30.00	-19.02	2.30	13.28	-	-
AVG			26	4	135/143.4 (MCS11)	10.95	30.00	-19.05	2.30	13.25	-	-	
AVG			26	8	135/143.4 (MCS11)	11.00	30.00	-19.00	2.30	13.30	-	-	
5825	165	AVG	26	0	135/143.4 (MCS11)	10.99	30.00	-19.01	2.30	13.29	-	-	
		AVG	26	4	135/143.4 (MCS11)	10.76	30.00	-19.24	2.30	13.06	-	-	
		AVG	26	8	135/143.4 (MCS11)	10.86	30.00	-19.14	2.30	13.16	-	-	

Table 7-39. ISED Ant 2 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5190	38	AVG	26	0	271/286.8 (MCS11)	6.86	-	-	2.50	9.36	22.77	-13.41
			AVG	26	8	271/286.8 (MCS11)	6.89	-	-	2.50	9.39	22.77	-13.38
			AVG	26	17	271/286.8 (MCS11)	6.70	-	-	2.50	9.20	22.77	-13.57
	5230	46	AVG	26	0	271/286.8 (MCS11)	6.86	-	-	2.50	9.36	22.77	-13.41
			AVG	26	8	271/286.8 (MCS11)	6.88	-	-	2.50	9.38	22.77	-13.39
			AVG	26	17	271/286.8 (MCS11)	6.81	-	-	2.50	9.31	22.77	-13.46
	5755	151	AVG	26	0	271/286.8 (MCS11)	11.00	30.00	-19.00	2.30	13.30	-	-
			AVG	26	8	271/286.8 (MCS11)	10.92	30.00	-19.08	2.30	13.22	-	-
			AVG	26	17	271/286.8 (MCS11)	11.00	30.00	-19.00	2.30	13.30	-	-
	5795	159	AVG	26	0	271/286.8 (MCS11)	10.94	30.00	-19.06	2.30	13.24	-	-
			AVG	26	8	271/286.8 (MCS11)	10.87	30.00	-19.13	2.30	13.17	-	-
			AVG	26	17	271/286.8 (MCS11)	10.90	30.00	-19.10	2.30	13.20	-	-

Table 7-40. ISED Ant 2 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5210	42	AVG	26	0	567/600.5 (MCS11)	6.73	-	-	2.50	9.23	22.77	-13.54
			AVG	26	18	567/600.5 (MCS11)	6.74	-	-	2.50	9.24	22.77	-13.53
			AVG	26	36	567/600.5 (MCS11)	6.98	-	-	2.50	9.48	22.77	-13.29
	5775	155	AVG	26	0	567/600.5 (MCS11)	10.99	30.00	-19.01	2.30	13.29	-	-
			AVG	26	18	567/600.5 (MCS11)	10.98	30.00	-19.02	2.30	13.28	-	-
AVG			26	36	567/600.5 (MCS11)	10.90	30.00	-19.10	2.30	13.20	-	-	

Table 7-41. ISED Ant 2 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 55 of 263


FCC Ant 2 Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5260	52	AVG	52	37	135/143.4 (MCS11)	13.88	23.95	-10.07
			AVG	52	39	135/143.4 (MCS11)	13.87	23.95	-10.08
			AVG	52	40	135/143.4 (MCS11)	13.80	23.95	-10.15
	5300	60	AVG	52	37	135/143.4 (MCS11)	13.92	23.95	-10.03
			AVG	52	39	135/143.4 (MCS11)	14.00	23.95	-9.95
			AVG	52	40	135/143.4 (MCS11)	14.00	23.95	-9.95
	5320	64	AVG	52	37	135/143.4 (MCS11)	14.00	23.95	-9.95
			AVG	52	39	135/143.4 (MCS11)	13.80	23.95	-10.15
			AVG	52	40	135/143.4 (MCS11)	13.91	23.95	-10.04
5500	100	AVG	52	37	135/143.4 (MCS11)	13.94	23.68	-9.74	
		AVG	52	39	135/143.4 (MCS11)	13.90	23.68	-9.78	
		AVG	52	40	135/143.4 (MCS11)	14.00	23.68	-9.68	
5580	116	AVG	52	37	135/143.4 (MCS11)	13.92	23.68	-9.76	
		AVG	52	39	135/143.4 (MCS11)	13.90	23.68	-9.78	
		AVG	52	40	135/143.4 (MCS11)	13.87	23.68	-9.81	
5720	144	AVG	52	37	135/143.4 (MCS11)	14.00	23.68	-9.68	
		AVG	52	39	135/143.4 (MCS11)	13.90	23.68	-9.78	
		AVG	52	40	135/143.4 (MCS11)	13.99	23.68	-9.69	

Table 7-42. FCC Ant 2 20MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5270	54	AVG	52	37	271/286.8 (MCS11)	13.88	23.95	-10.07
			AVG	52	40	271/286.8 (MCS11)	13.99	23.95	-9.96
			AVG	52	44	271/286.8 (MCS11)	13.92	23.95	-10.03
	5310	62	AVG	52	37	271/286.8 (MCS11)	11.70	23.95	-12.25
			AVG	52	40	271/286.8 (MCS11)	11.91	23.95	-12.04
			AVG	52	44	271/286.8 (MCS11)	11.92	23.95	-12.03
	5510	102	AVG	52	37	271/286.8 (MCS11)	11.83	23.68	-11.85
			AVG	52	40	271/286.8 (MCS11)	11.73	23.68	-11.95
			AVG	52	44	271/286.8 (MCS11)	11.86	23.68	-11.82
5550	110	AVG	52	37	271/286.8 (MCS11)	13.91	23.68	-9.77	
		AVG	52	40	271/286.8 (MCS11)	13.92	23.68	-9.76	
		AVG	52	44	271/286.8 (MCS11)	13.97	23.68	-9.71	
5710	142	AVG	52	37	271/286.8 (MCS11)	14.00	23.68	-9.68	
		AVG	52	40	271/286.8 (MCS11)	13.85	23.68	-9.83	
		AVG	52	44	271/286.8 (MCS11)	13.85	23.68	-9.83	

Table 7-43. FCC Ant 2 40MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 56 of 263

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5290	58	AVG	52	37	567/600.5 (MCS11)	11.98	23.95	-11.97
			AVG	52	44	567/600.5 (MCS11)	11.89	23.95	-12.06
			AVG	52	52	567/600.5 (MCS11)	11.88	23.95	-12.07
	5530	106	AVG	52	37	567/600.5 (MCS11)	11.84	23.68	-11.84
			AVG	52	44	567/600.5 (MCS11)	12.00	23.68	-11.68
			AVG	52	52	567/600.5 (MCS11)	11.80	23.68	-11.88
	5610	122	AVG	52	37	567/600.5 (MCS11)	13.98	23.68	-9.70
			AVG	52	44	567/600.5 (MCS11)	13.70	23.68	-9.98
			AVG	52	52	567/600.5 (MCS11)	13.92	23.68	-9.76
5690	138	AVG	52	37	567/600.5 (MCS11)	13.94	23.68	-9.74	
		AVG	52	44	567/600.5 (MCS11)	13.96	23.68	-9.72	
		AVG	52	52	567/600.5 (MCS11)	13.79	23.68	-9.89	

Table 7-44. FCC Ant 2 80MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 57 of 263

ISED Ant 2 Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5260	52	AVG	52	37	135/143.4 (MCS11)	13.88	23.95	-10.07	2.30	16.18	29.95	-13.77
			AVG	52	39	135/143.4 (MCS11)	13.87	23.95	-10.08	2.30	16.17	29.95	-13.78
			AVG	52	40	135/143.4 (MCS11)	13.80	23.95	-10.15	2.30	16.10	29.95	-13.85
	5300	60	AVG	52	37	135/143.4 (MCS11)	13.92	23.95	-10.03	2.30	16.22	29.95	-13.73
			AVG	52	39	135/143.4 (MCS11)	14.00	23.95	-9.95	2.30	16.30	29.95	-13.65
			AVG	52	40	135/143.4 (MCS11)	14.00	23.95	-9.95	2.30	16.30	29.95	-13.65
	5320	64	AVG	52	37	135/143.4 (MCS11)	14.00	23.95	-9.95	2.30	16.30	29.95	-13.65
			AVG	52	39	135/143.4 (MCS11)	13.80	23.95	-10.15	2.30	16.10	29.95	-13.85
			AVG	52	40	135/143.4 (MCS11)	13.91	23.95	-10.04	2.30	16.21	29.95	-13.74
	5500	100	AVG	52	37	135/143.4 (MCS11)	13.94	23.68	-9.74	1.80	15.74	29.68	-13.94
			AVG	52	39	135/143.4 (MCS11)	13.90	23.68	-9.78	1.80	15.70	29.68	-13.98
			AVG	52	40	135/143.4 (MCS11)	14.00	23.68	-9.68	1.80	15.80	29.68	-13.88
	5580	116	AVG	52	37	135/143.4 (MCS11)	13.92	23.68	-9.76	1.80	15.72	29.68	-13.96
AVG			52	39	135/143.4 (MCS11)	13.90	23.68	-9.78	1.80	15.70	29.68	-13.98	
AVG			52	40	135/143.4 (MCS11)	13.87	23.68	-9.81	1.80	15.67	29.68	-14.01	
5720	144	AVG	52	37	135/143.4 (MCS11)	14.00	23.68	-9.68	1.80	15.80	29.68	-13.88	
		AVG	52	39	135/143.4 (MCS11)	13.90	23.68	-9.78	1.80	15.70	29.68	-13.98	
		AVG	52	40	135/143.4 (MCS11)	13.99	23.68	-9.69	1.80	15.79	29.68	-13.89	

Table 7-45. ISED Ant 2 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5270	54	AVG	52	37	271/286.8 (MCS11)	13.88	23.95	-10.07	2.30	16.18	29.95	-13.77
			AVG	52	40	271/286.8 (MCS11)	13.99	23.95	-9.96	2.30	16.29	29.95	-13.66
			AVG	52	44	271/286.8 (MCS11)	13.92	23.95	-10.03	2.30	16.22	29.95	-13.73
	5310	62	AVG	52	37	271/286.8 (MCS11)	11.70	23.95	-12.25	2.30	14.00	29.95	-15.95
			AVG	52	40	271/286.8 (MCS11)	11.91	23.95	-12.04	2.30	14.21	29.95	-15.74
			AVG	52	44	271/286.8 (MCS11)	11.92	23.95	-12.03	2.30	14.22	29.95	-15.73
	5510	102	AVG	52	37	271/286.8 (MCS11)	11.83	23.68	-11.85	1.80	13.63	29.68	-16.05
			AVG	52	40	271/286.8 (MCS11)	11.73	23.68	-11.95	1.80	13.53	29.68	-16.15
			AVG	52	44	271/286.8 (MCS11)	11.86	23.68	-11.82	1.80	13.66	29.68	-16.02
	5550	110	AVG	52	37	271/286.8 (MCS11)	13.91	23.68	-9.77	1.80	15.71	29.68	-13.97
			AVG	52	40	271/286.8 (MCS11)	13.92	23.68	-9.76	1.80	15.72	29.68	-13.96
			AVG	52	44	271/286.8 (MCS11)	13.97	23.68	-9.71	1.80	15.77	29.68	-13.91
	5710	142	AVG	52	37	271/286.8 (MCS11)	14.00	23.68	-9.68	1.80	15.80	29.68	-13.88
AVG			52	40	271/286.8 (MCS11)	13.85	23.68	-9.83	1.80	15.65	29.68	-14.03	
AVG			52	44	271/286.8 (MCS11)	13.85	23.68	-9.83	1.80	15.65	29.68	-14.03	

Table 7-46. ISED Ant 2 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5290	58	AVG	52	37	567/600.5 (MCS11)	11.98	23.95	-11.97	2.30	14.28	29.95	-15.67
			AVG	52	44	567/600.5 (MCS11)	11.89	23.95	-12.06	2.30	14.19	29.95	-15.76
			AVG	52	52	567/600.5 (MCS11)	11.88	23.95	-12.07	2.30	14.18	29.95	-15.77
	5530	106	AVG	52	37	567/600.5 (MCS11)	11.84	23.68	-11.84	1.80	13.64	29.68	-16.04
			AVG	52	44	567/600.5 (MCS11)	12.00	23.68	-11.68	1.80	13.80	29.68	-15.88
			AVG	52	52	567/600.5 (MCS11)	11.80	23.68	-11.88	1.80	13.60	29.68	-16.08
	5690	138	AVG	52	37	567/600.5 (MCS11)	13.94	23.68	-9.74	1.80	15.74	29.68	-13.94
			AVG	52	44	567/600.5 (MCS11)	13.96	23.68	-9.72	1.80	15.76	29.68	-13.92
			AVG	52	52	567/600.5 (MCS11)	13.79	23.68	-9.89	1.80	15.59	29.68	-14.09

Table 7-47. ISED Ant 2 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 58 of 263

FCC Ant 2 Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5180	36	AVG	106	53	135/143.4 (MCS11)	16.98	23.98	-7.00
			AVG	106	54	135/143.4 (MCS11)	16.97	23.98	-7.01
	5200	40	AVG	106	53	135/143.4 (MCS11)	17.00	23.98	-6.98
			AVG	106	54	135/143.4 (MCS11)	17.00	23.98	-6.98
	5240	48	AVG	106	53	135/143.4 (MCS11)	16.98	23.98	-7.00
			AVG	106	54	135/143.4 (MCS11)	16.96	23.98	-7.02
	5260	52	AVG	106	53	135/143.4 (MCS11)	17.00	23.95	-6.95
			AVG	106	54	135/143.4 (MCS11)	16.90	23.95	-7.05
	5300	60	AVG	106	53	135/143.4 (MCS11)	16.94	23.95	-7.01
			AVG	106	54	135/143.4 (MCS11)	16.80	23.95	-7.15
	5320	64	AVG	106	53	135/143.4 (MCS11)	16.90	23.95	-7.05
			AVG	106	54	135/143.4 (MCS11)	16.81	23.95	-7.14
	5500	100	AVG	106	53	135/143.4 (MCS11)	16.99	23.68	-6.69
			AVG	106	54	135/143.4 (MCS11)	16.90	23.68	-6.78
	5580	116	AVG	106	53	135/143.4 (MCS11)	16.97	23.68	-6.71
AVG			106	54	135/143.4 (MCS11)	16.88	23.68	-6.80	
5720	144	AVG	106	53	135/143.4 (MCS11)	17.00	23.68	-6.68	
		AVG	106	54	135/143.4 (MCS11)	16.92	23.68	-6.76	
5745	149	AVG	106	53	135/143.4 (MCS11)	16.88	30.00	-13.12	
		AVG	106	54	135/143.4 (MCS11)	16.90	30.00	-13.10	
5785	157	AVG	106	53	135/143.4 (MCS11)	16.99	30.00	-13.01	
		AVG	106	54	135/143.4 (MCS11)	16.94	30.00	-13.06	
5825	165	AVG	106	53	135/143.4 (MCS11)	17.00	30.00	-13.00	
		AVG	106	54	135/143.4 (MCS11)	16.85	30.00	-13.15	

Table 7-48. FCC Ant 2 20MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 59 of 263

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5190	38	AVG	106	53	271/286.8 (MCS11)	16.82	23.98	-7.16
			AVG	106	54	271/286.8 (MCS11)	16.80	23.98	-7.18
			AVG	106	56	271/286.8 (MCS11)	16.90	23.98	-7.08
	5230	46	AVG	242	61	271/286.8 (MCS11)	19.40	23.98	-4.58
			AVG	242	62	271/286.8 (MCS11)	19.50	23.98	-4.48
	5270	54	AVG	242	61	271/286.8 (MCS11)	19.46	23.95	-4.49
			AVG	242	62	271/286.8 (MCS11)	19.48	23.95	-4.47
	5310	62	AVG	242	61	271/286.8 (MCS11)	17.38	23.95	-6.57
			AVG	242	62	271/286.8 (MCS11)	17.45	23.95	-6.50
	5510	102	AVG	242	61	271/286.8 (MCS11)	15.48	23.68	-8.20
			AVG	242	62	271/286.8 (MCS11)	15.40	23.68	-8.28
	5550	110	AVG	242	61	271/286.8 (MCS11)	19.50	23.68	-4.18
			AVG	242	62	271/286.8 (MCS11)	19.37	23.68	-4.31
5590	118	AVG	242	61	271/286.8 (MCS11)	19.33	23.68	-4.35	
		AVG	242	62	271/286.8 (MCS11)	19.42	23.68	-4.26	
5670	134	AVG	242	61	271/286.8 (MCS11)	19.50	23.68	-4.18	
		AVG	242	62	271/286.8 (MCS11)	19.36	23.68	-4.32	
5710	142	AVG	106	53	271/286.8 (MCS11)	17.00	23.68	-6.68	
		AVG	106	54	271/286.8 (MCS11)	16.94	23.68	-6.74	
		AVG	106	56	271/286.8 (MCS11)	16.82	23.68	-6.86	
5755	151	AVG	242	61	271/286.8 (MCS11)	19.78	30.00	-10.22	
		AVG	242	62	271/286.8 (MCS11)	19.99	30.00	-10.01	
5795	159	AVG	242	61	271/286.8 (MCS11)	20.00	30.00	-10.00	
		AVG	242	62	271/286.8 (MCS11)	19.90	30.00	-10.10	

Table 7-49. FCC Ant 2 40MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5210	42	AVG	242	61	567/600.5 (MCS11)	15.97	23.98	-8.01
			AVG	242	62	567/600.5 (MCS11)	15.94	23.98	-8.04
			AVG	242	64	567/600.5 (MCS11)	15.96	23.98	-8.02
	5290	58	AVG	242	61	567/600.5 (MCS11)	17.50	23.95	-6.45
			AVG	242	62	567/600.5 (MCS11)	17.20	23.95	-6.75
			AVG	242	64	567/600.5 (MCS11)	17.35	23.95	-6.60
	5530	106	AVG	242	61	567/600.5 (MCS11)	15.47	23.68	-8.21
			AVG	242	62	567/600.5 (MCS11)	15.46	23.68	-8.22
			AVG	242	64	567/600.5 (MCS11)	15.46	23.68	-8.22
	5610	122	AVG	484	65	567/600.5 (MCS11)	19.98	23.68	-3.70
			AVG	484	66	567/600.5 (MCS11)	19.85	23.68	-3.83
	5690	138	AVG	484	65	567/600.5 (MCS11)	17.15	23.68	-6.53
			AVG	484	66	567/600.5 (MCS11)	17.09	23.68	-6.59
5775	155	AVG	484	65	567/600.5 (MCS11)	19.92	30.00	-10.08	
		AVG	484	66	567/600.5 (MCS11)	19.85	30.00	-10.15	

Table 7-50. FCC Ant 2 80MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 60 of 263

ISED Ant 2 Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5180	36	AVG	106	53	135/143.4 (MCS11)	12.72	-	-	2.50	15.22	22.77	-7.55
			AVG	106	54	135/143.4 (MCS11)	12.82	-	-	2.50	15.32	22.77	-7.45
	5200	40	AVG	106	53	135/143.4 (MCS11)	12.89	-	-	2.50	15.39	22.77	-7.38
			AVG	106	54	135/143.4 (MCS11)	12.72	-	-	2.50	15.22	22.77	-7.55
	5240	48	AVG	106	53	135/143.4 (MCS11)	12.84	-	-	2.50	15.34	22.77	-7.43
			AVG	106	54	135/143.4 (MCS11)	13.00	-	-	2.50	15.50	22.77	-7.27
	5260	52	AVG	106	53	135/143.4 (MCS11)	17.00	23.95	-6.95	2.30	19.30	29.95	-10.65
			AVG	106	54	135/143.4 (MCS11)	16.90	23.95	-7.05	2.30	19.20	29.95	-10.75
	5300	60	AVG	106	53	135/143.4 (MCS11)	16.94	23.95	-7.01	2.30	19.24	29.95	-10.71
			AVG	106	54	135/143.4 (MCS11)	16.80	23.95	-7.15	2.30	19.10	29.95	-10.85
	5320	64	AVG	106	53	135/143.4 (MCS11)	16.90	23.95	-7.05	2.30	19.20	29.95	-10.75
			AVG	106	54	135/143.4 (MCS11)	16.81	23.95	-7.14	2.30	19.11	29.95	-10.84
	5500	100	AVG	106	53	135/143.4 (MCS11)	16.99	23.68	-6.69	1.80	18.79	29.68	-10.89
AVG			106	54	135/143.4 (MCS11)	16.90	23.68	-6.78	1.80	18.70	29.68	-10.98	
5580	116	AVG	106	53	135/143.4 (MCS11)	16.97	23.68	-6.71	1.80	18.77	29.68	-10.91	
		AVG	106	54	135/143.4 (MCS11)	16.88	23.68	-6.80	1.80	18.68	29.68	-11.00	
5720	144	AVG	106	53	135/143.4 (MCS11)	17.00	23.68	-6.68	1.80	18.80	29.68	-10.88	
		AVG	106	54	135/143.4 (MCS11)	16.92	23.68	-6.76	1.80	18.72	29.68	-10.96	
5745	149	AVG	106	53	135/143.4 (MCS11)	16.88	30.00	-13.12	2.30	19.18	-	-	
		AVG	106	54	135/143.4 (MCS11)	16.90	30.00	-13.10	2.30	19.20	-	-	
5785	157	AVG	106	53	135/143.4 (MCS11)	16.99	30.00	-13.01	2.30	19.29	-	-	
		AVG	106	54	135/143.4 (MCS11)	16.94	30.00	-13.06	2.30	19.24	-	-	
5825	165	AVG	106	53	135/143.4 (MCS11)	17.00	30.00	-13.00	2.30	19.30	-	-	
		AVG	106	54	135/143.4 (MCS11)	16.85	30.00	-13.15	2.30	19.15	-	-	

Table 7-51. ISED Ant 2 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5190	38	AVG	242	61	271/286.8 (MCS11)	14.94	-	-	2.50	17.44	22.77	-5.33
			AVG	242	62	271/286.8 (MCS11)	15.00	-	-	2.50	17.50	22.77	-5.27
	5230	46	AVG	242	61	271/286.8 (MCS11)	14.78	-	-	2.50	17.28	22.77	-5.49
			AVG	242	62	271/286.8 (MCS11)	14.72	-	-	2.50	17.22	22.77	-5.55
	5270	54	AVG	242	61	271/286.8 (MCS11)	19.46	23.95	-4.49	2.30	21.76	29.95	-8.19
			AVG	242	62	271/286.8 (MCS11)	19.48	23.95	-4.47	2.30	21.78	29.95	-8.17
	5310	62	AVG	242	61	271/286.8 (MCS11)	17.38	23.95	-6.57	2.30	19.68	29.95	-10.27
			AVG	242	62	271/286.8 (MCS11)	17.45	23.95	-6.50	2.30	19.75	29.95	-10.20
	5510	102	AVG	242	61	271/286.8 (MCS11)	15.48	23.68	-8.20	1.80	17.28	29.68	-12.40
			AVG	242	62	271/286.8 (MCS11)	15.40	23.68	-8.28	1.80	17.20	29.68	-12.48
	5550	110	AVG	242	61	271/286.8 (MCS11)	19.50	23.68	-4.18	1.80	21.30	29.68	-8.38
			AVG	242	62	271/286.8 (MCS11)	19.37	23.68	-4.31	1.80	21.17	29.68	-8.51
	5670	134	AVG	242	61	271/286.8 (MCS11)	19.50	23.68	-4.18	1.80	21.30	29.68	-8.38
AVG			242	62	271/286.8 (MCS11)	19.36	23.68	-4.32	1.80	21.16	29.68	-8.52	
5710	142	AVG	106	53	271/286.8 (MCS11)	17.00	23.68	-6.68	1.80	18.80	29.68	-10.88	
		AVG	106	54	271/286.8 (MCS11)	16.94	23.68	-6.74	1.80	18.74	29.68	-10.94	
		AVG	106	56	271/286.8 (MCS11)	16.82	23.68	-6.86	1.80	18.62	29.68	-11.06	
5755	151	AVG	242	61	271/286.8 (MCS11)	19.78	30.00	-10.22	2.30	22.08	-	-	
		AVG	242	62	271/286.8 (MCS11)	19.99	30.00	-10.01	2.30	22.29	-	-	
5795	159	AVG	242	61	271/286.8 (MCS11)	20.00	30.00	-10.00	2.30	22.30	-	-	
		AVG	242	62	271/286.8 (MCS11)	19.90	30.00	-10.10	2.30	22.20	-	-	

Table 7-52. ISED Ant 2 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5210	42	AVG	242	61	567/600.5 (MCS11)	14.74	-	-	2.50	17.24	22.77	-5.53
			AVG	242	62	567/600.5 (MCS11)	14.77	-	-	2.50	17.27	22.77	-5.50
			AVG	242	64	567/600.5 (MCS11)	14.99	-	-	2.50	17.49	22.77	-5.28
	5290	58	AVG	242	61	567/600.5 (MCS11)	17.50	23.95	-6.45	2.30	19.80	29.95	-10.15
			AVG	242	62	567/600.5 (MCS11)	17.20	23.95	-6.75	2.30	19.50	29.95	-10.45
			AVG	242	64	567/600.5 (MCS11)	17.35	23.95	-6.60	2.30	19.65	29.95	-10.30
	5530	106	AVG	242	61	567/600.5 (MCS11)	15.47	23.68	-8.21	1.80	17.27	29.68	-12.41
			AVG	242	62	567/600.5 (MCS11)	15.46	23.68	-8.22	1.80	17.26	29.68	-12.42
			AVG	242	64	567/600.5 (MCS11)	15.46	23.68	-8.22	1.80	17.26	29.68	-12.42
	5690	138	AVG	484	65	567/600.5 (MCS11)	17.15	23.68	-6.53	1.80	18.95	29.68	-10.73
			AVG	484	66	567/600.5 (MCS11)	17.09	23.68	-6.59	1.80	18.89	29.68	-10.79
	5775	155	AVG	484	65	567/600.5 (MCS11)	19.92	30.00	-10.08	2.30	22.22	-	-
			AVG	484	66	567/600.5 (MCS11)	19.85	30.00	-10.15	2.30	22.15	-	-

Table 7-53. ISED Ant 2 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 61 of 263

FCC Ant 2 Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5180	36	AVG	242	61	135/143.4 (MCS11)	15.89	23.98	-8.09
	5200	40	AVG	242	61	135/143.4 (MCS11)	19.50	23.98	-4.48
	5240	48	AVG	242	61	135/143.4 (MCS11)	19.47	23.98	-4.51
	5260	52	AVG	242	61	135/143.4 (MCS11)	19.30	23.95	-4.65
	5300	60	AVG	242	61	135/143.4 (MCS11)	19.35	23.95	-4.60
	5320	64	AVG	242	61	135/143.4 (MCS11)	17.50	23.95	-6.45
	5500	100	AVG	242	61	135/143.4 (MCS11)	15.40	23.68	-8.28
	5520	104	AVG	242	61	135/143.4 (MCS11)	19.20	23.68	-4.48
	5540	108	AVG	242	61	135/143.4 (MCS11)	19.43	23.68	-4.25
	5580	116	AVG	242	61	135/143.4 (MCS11)	19.48	23.68	-4.20
	5680	136	AVG	242	61	135/143.4 (MCS11)	19.40	23.68	-4.28
	5700	140	AVG	242	61	135/143.4 (MCS11)	16.00	23.68	-7.68
	5720	144	AVG	242	61	135/143.4 (MCS11)	19.40	23.68	-4.28
	5745	149	AVG	242	61	135/143.4 (MCS11)	19.70	30.00	-10.30
5785	157	AVG	242	61	135/143.4 (MCS11)	20.00	30.00	-10.00	
5825	165	AVG	242	61	135/143.4 (MCS11)	19.75	30.00	-10.25	


Table 7-54. FCC Ant 2 20MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5190	38	AVG	484	65	271/286.8 (MCS11)	12.35	23.98	-11.63
	5230	46	AVG	484	65	271/286.8 (MCS11)	19.15	23.98	-4.83
	5270	54	AVG	484	65	271/286.8 (MCS11)	19.88	23.95	-4.07
	5310	62	AVG	484	65	271/286.8 (MCS11)	14.48	23.95	-9.47
	5510	102	AVG	484	65	271/286.8 (MCS11)	12.95	23.68	-10.73
	5550	110	AVG	484	65	271/286.8 (MCS11)	20.00	23.68	-3.68
	5630	126	AVG	484	65	271/286.8 (MCS11)	19.82	23.68	-3.86
	5670	134	AVG	484	65	271/286.8 (MCS11)	17.20	23.68	-6.48
	5710	142	AVG	484	65	271/286.8 (MCS11)	19.90	23.68	-3.78
	5755	151	AVG	484	65	271/286.8 (MCS11)	19.88	30.00	-10.12
	5795	159	AVG	484	65	271/286.8 (MCS11)	20.00	30.00	-10.00

Table 7-55. FCC Ant 2 40MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	5210	42	AVG	996	67	567/600.5 (MCS11)	11.26	23.98	-12.72
	5290	58	AVG	996	67	567/600.5 (MCS11)	10.85	23.95	-13.10
	5530	106	AVG	996	67	567/600.5 (MCS11)	13.71	23.68	-9.97
	5610	122	AVG	996	67	567/600.5 (MCS11)	17.36	23.68	-6.32
	5690	138	AVG	996	67	567/600.5 (MCS11)	19.88	23.68	-3.80
	5775	155	AVG	996	67	567/600.5 (MCS11)	17.71	30.00	-12.29

Table 7-56. FCC Ant 2 80MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 62 of 263

ISED Ant 2 Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5180	36	AVG	242	61	135/143.4 (MCS11)	14.90	-	-	2.50	17.40	22.77	-5.37
	5200	40	AVG	242	61	135/143.4 (MCS11)	14.99	-	-	2.50	17.49	22.77	-5.28
	5240	48	AVG	242	61	135/143.4 (MCS11)	14.85	-	-	2.50	17.35	22.77	-5.42
	5260	52	AVG	242	61	135/143.4 (MCS11)	19.30	23.95	-4.65	2.30	21.60	29.95	-8.35
	5300	60	AVG	242	61	135/143.4 (MCS11)	19.35	23.95	-4.60	2.30	21.65	29.95	-8.30
	5320	64	AVG	242	61	135/143.4 (MCS11)	17.50	23.95	-6.45	2.30	19.80	29.95	-10.15
	5500	100	AVG	242	61	135/143.4 (MCS11)	15.40	23.68	-8.28	1.80	17.20	29.68	-12.48
	5520	104	AVG	242	61	135/143.4 (MCS11)	19.20	23.68	-4.48	1.80	21.00	29.68	-8.68
	5540	108	AVG	242	61	135/143.4 (MCS11)	19.43	23.68	-4.25	1.80	21.23	29.68	-8.45
	5580	116	AVG	242	61	135/143.4 (MCS11)	19.48	23.68	-4.20	1.80	21.28	29.68	-8.40
	5680	136	AVG	242	61	135/143.4 (MCS11)	19.40	23.68	-4.28	1.80	21.20	29.68	-8.48
	5700	140	AVG	242	61	135/143.4 (MCS11)	16.00	23.68	-7.68	1.80	17.80	29.68	-11.88
	5720	144	AVG	242	61	135/143.4 (MCS11)	19.40	23.68	-4.28	1.80	21.20	29.68	-8.48
	5745	149	AVG	242	61	135/143.4 (MCS11)	19.70	30.00	-10.30	2.30	22.00	-	-
	5785	157	AVG	242	61	135/143.4 (MCS11)	20.00	30.00	-10.00	2.30	22.30	-	-
5825	165	AVG	242	61	135/143.4 (MCS11)	19.75	30.00	-10.25	2.30	22.05	-	-	

Table 7-57. ISED Ant 2 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5190	38	AVG	484	65	271/286.8 (MCS11)	12.35	-	-	2.50	14.85	22.77	-7.92
	5230	46	AVG	484	65	271/286.8 (MCS11)	17.47	-	-	2.50	19.97	22.77	-2.80
	5270	54	AVG	484	65	271/286.8 (MCS11)	19.88	23.95	-4.07	2.30	22.18	29.95	-7.77
	5310	62	AVG	484	65	271/286.8 (MCS11)	14.48	23.95	-9.47	2.30	16.78	29.95	-13.17
	5510	102	AVG	484	65	271/286.8 (MCS11)	12.95	23.68	-10.73	1.80	14.75	29.68	-14.93
	5550	110	AVG	484	65	271/286.8 (MCS11)	20.00	23.68	-3.68	1.80	21.80	29.68	-7.88
	5670	134	AVG	484	65	271/286.8 (MCS11)	17.20	23.68	-6.48	1.80	19.00	29.68	-10.68
	5710	142	AVG	484	65	271/286.8 (MCS11)	19.90	23.68	-3.78	1.80	21.70	29.68	-7.98
	5755	151	AVG	484	65	271/286.8 (MCS11)	19.88	30.00	-10.12	2.30	22.18	-	-
	5795	159	AVG	484	65	271/286.8 (MCS11)	20.00	30.00	-10.00	2.30	22.30	-	-

Table 7-58. ISED Ant 2 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5210	42	AVG	996	67	567/600.5 (MCS11)	10.90	-	-	2.50	13.40	22.77	-9.37
	5290	58	AVG	996	67	567/600.5 (MCS11)	10.85	23.95	-13.10	2.30	13.15	29.95	-16.80
	5530	106	AVG	996	67	567/600.5 (MCS11)	13.71	23.68	-9.97	1.80	15.51	29.68	-14.17
	5690	138	AVG	996	67	567/600.5 (MCS11)	19.88	23.68	-3.80	1.80	21.68	29.68	-8.00
	5775	155	AVG	996	67	567/600.5 (MCS11)	17.71	30.00	-12.29	2.30	20.01	-	-

Table 7-59. ISED Ant 2 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 63 of 263

FCC CDD Conducted Output Power Measurements (RU26)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
5180	36	CDD	AVG	26	0	270/286.8 (MCS11)	8.46	8.49	11.49	23.98	-12.49	
		CDD	AVG	26	4	270/286.8 (MCS11)	8.42	8.46	11.45	23.98	-12.53	
		CDD	AVG	26	8	270/286.8 (MCS11)	8.48	8.45	11.48	23.98	-12.50	
5200	40	CDD	AVG	26	0	270/286.8 (MCS11)	8.47	8.42	11.46	23.98	-12.52	
		CDD	AVG	26	4	270/286.8 (MCS11)	8.45	8.40	11.44	23.98	-12.54	
		CDD	AVG	26	8	270/286.8 (MCS11)	8.44	8.50	11.48	23.98	-12.50	
5240	48	CDD	AVG	26	0	270/286.8 (MCS11)	8.43	8.39	11.42	23.98	-12.56	
		CDD	AVG	26	4	270/286.8 (MCS11)	8.36	8.50	11.44	23.98	-12.54	
		CDD	AVG	26	8	270/286.8 (MCS11)	8.45	8.37	11.42	23.98	-12.56	
5745	149	CDD	AVG	26	0	270/286.8 (MCS11)	8.35	8.38	11.38	30.00	-18.62	
		CDD	AVG	27	4	270/286.8 (MCS11)	8.44	8.25	11.36	30.00	-18.64	
		CDD	AVG	28	8	270/286.8 (MCS11)	8.40	8.29	11.36	30.00	-18.64	
5785	157	CDD	AVG	29	0	270/286.8 (MCS11)	8.48	8.44	11.47	30.00	-18.53	
		CDD	AVG	30	4	270/286.8 (MCS11)	8.41	8.40	11.42	30.00	-18.58	
		CDD	AVG	31	8	270/286.8 (MCS11)	8.49	8.49	11.50	30.00	-18.50	
5825	165	CDD	AVG	32	0	270/286.8 (MCS11)	8.50	8.33	11.43	30.00	-18.57	
		CDD	AVG	33	4	270/286.8 (MCS11)	8.32	8.42	11.38	30.00	-18.62	
		CDD	AVG	34	8	270/286.8 (MCS11)	8.34	8.50	11.43	30.00	-18.57	

Table 7-60. FCC CDD 20MHz BW (UNII) Maximum Conducted Output Power (RU26)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
5190	38	CDD	AVG	26	0	540/573.5 (MCS11)	8.33	8.27	11.31	23.98	-12.67	
		CDD	AVG	26	8	540/573.5 (MCS11)	8.45	8.30	11.39	23.98	-12.59	
		CDD	AVG	26	17	540/573.5 (MCS11)	8.37	8.39	11.39	23.98	-12.59	
5230	46	CDD	AVG	26	0	540/573.5 (MCS11)	8.43	8.50	11.48	23.98	-12.50	
		CDD	AVG	26	8	540/573.5 (MCS11)	8.34	8.44	11.40	23.98	-12.58	
		CDD	AVG	26	17	540/573.5 (MCS11)	8.40	8.47	11.45	23.98	-12.53	
5755	151	CDD	AVG	26	0	540/573.5 (MCS11)	10.83	10.84	13.85	30.00	-16.15	
		CDD	AVG	26	8	540/573.5 (MCS11)	10.94	10.89	13.93	30.00	-16.07	
		CDD	AVG	26	17	540/573.5 (MCS11)	10.89	10.76	13.84	30.00	-16.16	
5795	159	CDD	AVG	26	0	540/573.5 (MCS11)	10.89	10.82	13.87	30.00	-16.13	
		CDD	AVG	26	8	540/573.5 (MCS11)	10.99	10.87	13.94	30.00	-16.06	
		CDD	AVG	26	17	540/573.5 (MCS11)	10.86	10.92	13.90	30.00	-16.10	

Table 7-61. FCC CDD 40MHz BW (UNII) Maximum Conducted Output Power (RU26)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
5210	42	CDD	AVG	26	0	1134/1201 (MCS11)	8.40	8.50	11.46	23.98	-12.52	
		CDD	AVG	26	18	1134/1201 (MCS11)	8.50	8.44	11.48	23.98	-12.50	
		CDD	AVG	26	36	1134/1201 (MCS11)	8.47	8.40	11.45	23.98	-12.53	
5775	155	CDD	AVG	26	0	1134/1201 (MCS11)	10.91	10.91	13.92	30.00	-16.08	
		CDD	AVG	26	18	1134/1201 (MCS11)	10.99	10.78	13.90	30.00	-16.10	
		CDD	AVG	26	36	1134/1201 (MCS11)	10.83	10.80	13.83	30.00	-16.17	

Table 7-62. FCC CDD 80MHz BW (UNII) Maximum Conducted Output Power (RU26)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 64 of 263

ISED CDD/SDM Conducted Output Power Measurements (RU26)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5180	36	SDM						
		SDM	AVG	26	4	270/286.8 (MCS11)	4.36	4.42	7.40	-	-	2.92	10.32	22.77	-12.45	
		SDM	AVG	26	8	270/286.8 (MCS11)	4.27	4.35	7.32	-	-	2.92	10.24	22.77	-12.53	
	5200	40	SDM	AVG	26	0	270/286.8 (MCS11)	4.46	4.32	7.40	-	-	2.92	10.32	22.77	-12.45
		SDM	AVG	26	4	270/286.8 (MCS11)	4.46	4.49	7.49	-	-	2.92	10.41	22.77	-12.36	
		SDM	AVG	26	8	270/286.8 (MCS11)	4.29	4.40	7.36	-	-	2.92	10.28	22.77	-12.49	
	5240	48	SDM	AVG	26	0	270/286.8 (MCS11)	4.36	4.42	7.40	-	-	2.92	10.32	22.77	-12.45
		SDM	AVG	26	4	270/286.8 (MCS11)	4.45	4.34	7.41	-	-	2.92	10.33	22.77	-12.44	
		SDM	AVG	26	8	270/286.8 (MCS11)	4.40	4.43	7.43	-	-	2.92	10.35	22.77	-12.42	
	5745	149	CDD	AVG	26	0	270/286.8 (MCS11)	8.35	8.38	11.38	30.00	-18.62	4.78	16.16	-	-
		CDD	AVG	26	4	270/286.8 (MCS11)	8.44	8.25	11.36	30.00	-18.64	4.78	16.14	-	-	
		CDD	AVG	26	8	270/286.8 (MCS11)	8.40	8.29	11.36	30.00	-18.64	4.78	16.14	-	-	
		CDD	AVG	26	0	270/286.8 (MCS11)	8.48	8.44	11.47	30.00	-18.53	4.78	16.25	-	-	
	5785	157	CDD	AVG	26	4	270/286.8 (MCS11)	8.41	8.40	11.42	30.00	-18.58	4.78	16.20	-	-
		CDD	AVG	26	8	270/286.8 (MCS11)	8.49	8.49	11.50	30.00	-18.50	4.78	16.28	-	-	
		CDD	AVG	26	0	270/286.8 (MCS11)	8.50	8.33	11.43	30.00	-18.57	4.78	16.21	-	-	
	5825	165	CDD	AVG	26	4	270/286.8 (MCS11)	8.32	8.42	11.38	30.00	-18.62	4.78	16.16	-	-
		CDD	AVG	26	8	270/286.8 (MCS11)	8.34	8.50	11.43	30.00	-18.57	4.78	16.21	-	-	

Table 7-63. ISED CDD/SDM 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5190	38	SDM						
		SDM	AVG	26	8	540/573.5 (MCS11)	4.50	4.30	7.41	-	-	2.92	10.33	22.77	-12.44	
		SDM	AVG	26	17	540/573.5 (MCS11)	4.40	4.35	7.39	-	-	2.92	10.31	22.77	-12.46	
	5230	46	SDM	AVG	26	0	540/573.5 (MCS11)	4.21	4.47	7.35	-	-	2.92	10.27	22.77	-12.50
		SDM	AVG	26	8	540/573.5 (MCS11)	4.35	4.32	7.35	-	-	2.92	10.27	22.77	-12.50	
		SDM	AVG	26	17	540/573.5 (MCS11)	4.35	4.40	7.39	-	-	2.92	10.31	22.77	-12.46	
		CDD	AVG	26	0	540/573.5 (MCS11)	10.83	10.84	13.85	30.00	-16.15	4.78	18.63	-	-	
	5755	151	CDD	AVG	26	8	540/573.5 (MCS11)	10.94	10.89	13.93	30.00	-16.07	4.78	18.71	-	-
		CDD	AVG	26	17	540/573.5 (MCS11)	10.89	10.76	13.84	30.00	-16.16	4.78	18.62	-	-	
		CDD	AVG	26	0	540/573.5 (MCS11)	10.89	10.82	13.87	30.00	-16.13	4.78	18.65	-	-	
	5795	159	CDD	AVG	26	8	540/573.5 (MCS11)	10.99	10.87	13.94	30.00	-16.06	4.78	18.72	-	-
		CDD	AVG	26	17	540/573.5 (MCS11)	10.86	10.92	13.90	30.00	-16.10	4.78	18.68	-	-	

Table 7-64. ISED CDD/SDM 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5210	42	SDM						
		SDM	AVG	26	18	1134/1201 (MCS11)	4.36	4.29	7.34	-	-	2.92	10.26	22.77	-12.51	
		SDM	AVG	26	36	1134/1201 (MCS11)	4.33	4.38	7.37	-	-	2.92	10.29	22.77	-12.48	
		CDD	AVG	26	0	1134/1201 (MCS11)	10.91	10.91	13.92	30.00	-16.08	4.78	18.70	-	-	
	5775	155	CDD	AVG	26	18	1134/1201 (MCS11)	10.99	10.78	13.90	30.00	-16.10	4.78	18.68	-	-
		CDD	AVG	26	36	1134/1201 (MCS11)	10.83	10.80	13.83	30.00	-16.17	4.78	18.61	-	-	

Table 7-65. ISED CDD/SDM 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 65 of 263

FCC CDD Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
5260	52	CDD	AVG	52	37	270/286.8 (MCS11)	11.48	11.41	14.46	23.95	-9.49	
				52	39	270/286.8 (MCS11)	11.43	11.38	14.42	23.95	-9.53	
				52	40	270/286.8 (MCS11)	11.41	11.36	14.40	23.95	-9.55	
5300	60	CDD	AVG	52	37	270/286.8 (MCS11)	11.21	11.49	14.36	23.95	-9.59	
				52	39	270/286.8 (MCS11)	11.28	11.50	14.40	23.95	-9.55	
				52	40	270/286.8 (MCS11)	11.20	11.43	14.33	23.95	-9.62	
5320	64	CDD	AVG	52	37	270/286.8 (MCS11)	11.45	11.44	14.46	23.95	-9.49	
				52	39	270/286.8 (MCS11)	11.31	11.29	14.31	23.95	-9.64	
				52	40	270/286.8 (MCS11)	11.34	11.36	14.36	23.95	-9.59	
5500	100	CDD	AVG	52	37	270/286.8 (MCS11)	11.46	11.38	14.43	23.68	-9.25	
				52	39	270/286.8 (MCS11)	11.31	11.42	14.38	23.68	-9.30	
				52	40	270/286.8 (MCS11)	11.27	11.49	14.39	23.68	-9.29	
5580	116	CDD	AVG	52	37	270/286.8 (MCS11)	11.44	11.30	14.38	23.68	-9.30	
				52	39	270/286.8 (MCS11)	11.50	11.42	14.47	23.68	-9.21	
				52	40	270/286.8 (MCS11)	11.42	11.31	14.38	23.68	-9.30	
5720	144	CDD	AVG	52	37	270/286.8 (MCS11)	11.50	11.45	14.49	23.68	-9.19	
				52	39	270/286.8 (MCS11)	11.30	11.38	14.35	23.68	-9.33	
				52	40	270/286.8 (MCS11)	11.42	11.49	14.47	23.68	-9.21	

Table 7-66. FCC CDD 20MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
5270	54	CDD	AVG	52	37	540/573.5 (MCS11)	11.48	11.49	14.50	23.95	-9.45	
				52	40	540/573.5 (MCS11)	11.50	11.34	14.43	23.95	-9.52	
				52	44	540/573.5 (MCS11)	11.38	11.45	14.43	23.95	-9.52	
5310	62	CDD	AVG	52	37	540/573.5 (MCS11)	11.22	11.29	14.27	23.95	-9.68	
				52	40	540/573.5 (MCS11)	11.35	11.41	14.39	23.95	-9.56	
				52	44	540/573.5 (MCS11)	11.24	11.49	14.38	23.95	-9.57	
5510	102	CDD	AVG	52	37	540/573.5 (MCS11)	11.26	11.36	14.32	23.68	-9.36	
				52	40	540/573.5 (MCS11)	11.46	11.32	14.40	23.68	-9.28	
				52	44	540/573.5 (MCS11)	11.39	11.46	14.44	23.68	-9.24	
5550	110	CDD	AVG	52	37	540/573.5 (MCS11)	11.41	11.29	14.36	23.68	-9.32	
				52	40	540/573.5 (MCS11)	11.38	11.49	14.45	23.68	-9.23	
				52	44	540/573.5 (MCS11)	11.42	11.22	14.33	23.68	-9.35	
5710	142	CDD	AVG	52	37	540/573.5 (MCS11)	11.29	11.39	14.35	23.68	-9.33	
				52	40	540/573.5 (MCS11)	11.47	11.38	14.44	23.68	-9.24	
				52	44	540/573.5 (MCS11)	11.34	11.47	14.42	23.68	-9.26	

Table 7-67. FCC CDD 40MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
5290	58	CDD	AVG	52	37	1134/1201 (MCS11)	11.33	11.41	14.38	23.95	-9.57	
				52	44	1134/1201 (MCS11)	11.20	11.24	14.23	23.95	-9.72	
				52	52	1134/1201 (MCS11)	11.46	11.48	14.48	23.95	-9.47	
5530	106	CDD	AVG	52	37	1134/1201 (MCS11)	11.44	11.47	14.47	23.68	-9.21	
				52	44	1134/1201 (MCS11)	11.22	11.49	14.37	23.68	-9.31	
				52	52	1134/1201 (MCS11)	11.34	11.35	14.36	23.68	-9.32	
5610	122	CDD	AVG	52	37	1134/1201 (MCS11)	11.32	11.43	14.39	23.68	-9.29	
				52	44	1134/1201 (MCS11)	11.44	11.38	14.42	23.68	-9.26	
				52	52	1134/1201 (MCS11)	11.29	11.42	14.37	23.68	-9.31	
5690	138	CDD	AVG	52	37	1134/1201 (MCS11)	11.45	11.41	14.44	23.68	-9.24	
				52	44	1134/1201 (MCS11)	11.32	11.35	14.35	23.68	-9.33	
				52	52	1134/1201 (MCS11)	11.48	11.36	14.43	23.68	-9.25	

Table 7-68. FCC CDD 80MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 66 of 263

ISED CDD/SDM Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5260	52	CDD						
		CDD	AVG	52	39	270/286.8 (MCS11)	11.43	11.38	14.42	23.95	-9.53	5.88	20.30	29.95	-9.66	
		CDD	AVG	52	40	270/286.8 (MCS11)	11.41	11.36	14.40	23.95	-9.55	5.88	20.28	29.95	-9.68	
	5300	60	CDD	AVG	52	37	270/286.8 (MCS11)	11.21	11.49	14.36	23.95	-9.59	5.88	20.24	29.95	-9.72
		CDD	AVG	52	39	270/286.8 (MCS11)	11.28	11.50	14.40	23.95	-9.55	5.88	20.28	29.95	-9.68	
		CDD	AVG	52	40	270/286.8 (MCS11)	11.20	11.43	14.33	23.95	-9.62	5.88	20.21	29.95	-9.75	
	5320	64	CDD	AVG	52	37	270/286.8 (MCS11)	11.45	11.44	14.46	23.95	-9.49	5.88	20.34	29.95	-9.62
		CDD	AVG	52	39	270/286.8 (MCS11)	11.31	11.29	14.31	23.95	-9.64	5.88	20.19	29.95	-9.77	
		CDD	AVG	52	40	270/286.8 (MCS11)	11.34	11.36	14.36	23.95	-9.59	5.88	20.24	29.95	-9.72	
	5500	100	CDD	AVG	52	37	270/286.8 (MCS11)	11.46	11.38	14.43	23.68	-9.25	5.22	19.65	29.68	-10.03
		CDD	AVG	52	39	270/286.8 (MCS11)	11.31	11.42	14.38	23.68	-9.30	5.22	19.60	29.68	-10.08	
		CDD	AVG	52	40	270/286.8 (MCS11)	11.27	11.49	14.39	23.68	-9.29	5.22	19.61	29.68	-10.07	
	5580	116	CDD	AVG	52	37	270/286.8 (MCS11)	11.44	11.30	14.38	23.68	-9.30	5.22	19.60	29.68	-10.08
		CDD	AVG	52	39	270/286.8 (MCS11)	11.50	11.42	14.47	23.68	-9.21	5.22	19.69	29.68	-9.99	
		CDD	AVG	52	40	270/286.8 (MCS11)	11.42	11.31	14.38	23.68	-9.30	5.22	19.60	29.68	-10.08	
	5720	144	CDD	AVG	52	37	270/286.8 (MCS11)	11.50	11.45	14.49	23.68	-9.19	5.22	19.71	29.68	-9.97
		CDD	AVG	52	39	270/286.8 (MCS11)	11.30	11.38	14.35	23.68	-9.33	5.22	19.57	29.68	-10.11	
		CDD	AVG	52	40	270/286.8 (MCS11)	11.42	11.49	14.47	23.68	-9.21	5.22	19.69	29.68	-9.99	

Table 7-69. ISED CDD/SDM 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5270	54	CDD						
		CDD	AVG	52	40	540/573.5 (MCS11)	11.50	11.34	14.43	23.95	-9.52	5.88	20.31	29.95	-9.65	
		CDD	AVG	52	44	540/573.5 (MCS11)	11.38	11.45	14.43	23.95	-9.52	5.88	20.31	29.95	-9.65	
	5310	62	CDD	AVG	52	37	540/573.5 (MCS11)	11.22	11.29	14.27	23.95	-9.68	5.88	20.15	29.95	-9.81
		CDD	AVG	52	40	540/573.5 (MCS11)	11.35	11.41	14.39	23.95	-9.56	5.88	20.27	29.95	-9.69	
		CDD	AVG	52	44	540/573.5 (MCS11)	11.24	11.49	14.38	23.95	-9.57	5.88	20.26	29.95	-9.70	
	5510	102	CDD	AVG	52	37	540/573.5 (MCS11)	11.26	11.36	14.32	23.68	-9.36	5.22	19.54	29.68	-10.14
		CDD	AVG	52	40	540/573.5 (MCS11)	11.46	11.32	14.40	23.68	-9.28	5.22	19.62	29.68	-10.06	
		CDD	AVG	52	44	540/573.5 (MCS11)	11.39	11.46	14.44	23.68	-9.24	5.22	19.66	29.68	-10.02	
	5710	142	CDD	AVG	52	37	540/573.5 (MCS11)	11.29	11.39	14.35	23.68	-9.33	5.22	19.57	29.68	-10.11
		CDD	AVG	52	40	540/573.5 (MCS11)	11.47	11.38	14.44	23.68	-9.24	5.22	19.66	29.68	-10.02	
		CDD	AVG	52	44	540/573.5 (MCS11)	11.34	11.47	14.42	23.68	-9.26	5.22	19.64	29.68	-10.04	

Table 7-70. ISED CDD/SDM 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5290	58	CDD						
		CDD	AVG	52	44	1134/1201 (MCS11)	11.20	11.24	14.23	23.95	-9.72	5.88	20.11	29.95	-9.85	
		CDD	AVG	52	52	1134/1201 (MCS11)	11.46	11.48	14.48	23.95	-9.47	5.88	20.36	29.95	-9.60	
	5530	106	CDD	AVG	52	37	1134/1201 (MCS11)	11.44	11.47	14.47	23.68	-9.21	5.22	19.69	29.68	-9.99
		CDD	AVG	52	44	1134/1201 (MCS11)	11.22	11.49	14.37	23.68	-9.31	5.22	19.59	29.68	-10.09	
		CDD	AVG	52	52	1134/1201 (MCS11)	11.34	11.35	14.36	23.68	-9.32	5.22	19.58	29.68	-10.10	
	5690	138	CDD	AVG	52	37	1134/1201 (MCS11)	11.45	11.41	14.44	23.68	-9.24	5.22	19.66	29.68	-10.02
		CDD	AVG	52	44	1134/1201 (MCS11)	11.32	11.35	14.35	23.68	-9.33	5.22	19.57	29.68	-10.11	
		CDD	AVG	52	52	1134/1201 (MCS11)	11.48	11.36	14.43	23.68	-9.25	5.22	19.65	29.68	-10.03	

Table 7-71. ISED CDD/SDM 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU52)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 67 of 263

FCC CDD Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
								5180	36	CDD		
		CDD	AVG	106	54	270/286.8 (MCS11)	14.33	14.35	17.35	23.98	-6.63	
	5200	40	CDD	AVG	106	53	270/286.8 (MCS11)	14.42	14.46	17.45	23.98	-6.53
		CDD	AVG	106	54	270/286.8 (MCS11)	14.50	14.50	17.51	23.98	-6.47	
	5240	48	CDD	AVG	106	53	270/286.8 (MCS11)	14.47	14.50	17.50	23.98	-6.48
		CDD	AVG	106	54	270/286.8 (MCS11)	14.50	14.43	17.48	23.98	-6.50	
	5260	52	CDD	AVG	106	53	270/286.8 (MCS11)	14.50	14.35	17.44	23.95	-6.51
		CDD	AVG	106	54	270/286.8 (MCS11)	14.50	14.50	17.51	23.95	-6.44	
	5300	60	CDD	AVG	106	53	270/286.8 (MCS11)	14.40	14.50	17.46	23.95	-6.49
		CDD	AVG	106	54	270/286.8 (MCS11)	14.36	14.47	17.43	23.95	-6.52	
	5320	64	CDD	AVG	106	53	270/286.8 (MCS11)	14.40	14.49	17.46	23.95	-6.49
		CDD	AVG	106	54	270/286.8 (MCS11)	14.50	14.50	17.51	23.95	-6.44	
	5500	100	CDD	AVG	106	53	270/286.8 (MCS11)	14.46	14.49	17.49	23.68	-6.19
		CDD	AVG	106	54	270/286.8 (MCS11)	14.49	14.50	17.51	23.68	-6.17	
	5580	116	CDD	AVG	106	53	270/286.8 (MCS11)	14.38	14.50	17.45	23.68	-6.23
		CDD	AVG	106	54	270/286.8 (MCS11)	14.37	14.33	17.36	23.68	-6.32	
	5720	144	CDD	AVG	106	53	270/286.8 (MCS11)	14.48	14.36	17.43	23.68	-6.25
		CDD	AVG	106	54	270/286.8 (MCS11)	14.30	14.40	17.36	23.68	-6.32	
	5745	149	CDD	AVG	106	53	270/286.8 (MCS11)	16.84	16.99	19.93	30.00	-10.07
		CDD	AVG	106	54	270/286.8 (MCS11)	16.91	16.89	19.91	30.00	-10.09	
	5785	157	CDD	AVG	106	53	270/286.8 (MCS11)	16.91	16.95	19.94	30.00	-10.06
		CDD	AVG	106	54	270/286.8 (MCS11)	16.97	16.83	19.91	30.00	-10.09	
	5825	165	CDD	AVG	106	53	270/286.8 (MCS11)	16.80	16.75	19.79	30.00	-10.21
		CDD	AVG	106	54	270/286.8 (MCS11)	16.78	16.72	19.76	30.00	-10.24	

Table 7-72. FCC CDD 20MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
								5190	38	CDD		
		CDD	AVG	242	62	540/573.5 (MCS11)	15.68	15.74	18.72	23.98	-5.26	
	5230	46	CDD	AVG	242	61	540/573.5 (MCS11)	16.48	16.49	19.50	23.98	-4.48
		CDD	AVG	242	62	540/573.5 (MCS11)	16.48	16.42	19.46	23.98	-4.52	
	5270	54	CDD	AVG	242	61	540/573.5 (MCS11)	16.41	16.42	19.43	23.95	-4.52
		CDD	AVG	242	62	540/573.5 (MCS11)	16.31	16.30	19.32	23.95	-4.63	
	5310	62	CDD	AVG	242	61	540/573.5 (MCS11)	16.23	16.36	19.31	23.95	-4.64
		CDD	AVG	242	62	540/573.5 (MCS11)	16.33	16.21	19.28	23.95	-4.67	
	5510	102	CDD	AVG	242	61	540/573.5 (MCS11)	14.86	14.92	17.90	23.68	-5.78
		CDD	AVG	242	62	540/573.5 (MCS11)	14.73	15.00	17.88	23.68	-5.80	
	5550	110	CDD	AVG	242	61	540/573.5 (MCS11)	16.39	16.47	19.44	23.68	-4.24
		CDD	AVG	242	62	540/573.5 (MCS11)	16.40	16.49	19.46	23.68	-4.22	
	5590	118	CDD	AVG	242	61	540/573.5 (MCS11)	16.48	16.34	19.42	23.68	-4.26
		CDD	AVG	242	62	540/573.5 (MCS11)	16.49	16.37	19.44	23.68	-4.24	
	5670	134	CDD	AVG	242	61	540/573.5 (MCS11)	16.23	16.31	19.28	23.68	-4.40
		CDD	AVG	242	62	540/573.5 (MCS11)	16.36	16.48	19.43	23.68	-4.25	
	5710	142	CDD	AVG	242	61	540/573.5 (MCS11)	14.62	14.71	17.68	23.68	-6.00
		CDD	AVG	242	62	540/573.5 (MCS11)	14.67	14.63	17.66	23.68	-6.02	
	5755	151	CDD	AVG	242	61	540/573.5 (MCS11)	19.76	19.91	22.85	30.00	-7.15
		CDD	AVG	242	62	540/573.5 (MCS11)	19.93	19.98	22.97	30.00	-7.03	
	5795	159	CDD	AVG	242	61	540/573.5 (MCS11)	19.84	19.81	22.84	30.00	-7.16
		CDD	AVG	242	62	540/573.5 (MCS11)	19.87	20.00	22.95	30.00	-7.05	

Table 7-73. FCC CDD 40MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 68 of 263

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
	5210	42	CDD	AVG	242	61	1134/1201 (MCS11)	15.71	15.56	18.65	23.98	-5.33
			CDD	AVG	242	62	1134/1201 (MCS11)	15.54	15.52	18.54	23.98	-5.44
			CDD	AVG	242	64	1134/1201 (MCS11)	15.55	15.71	18.64	23.98	-5.34
	5290	58	CDD	AVG	242	61	1134/1201 (MCS11)	16.45	16.44	19.46	23.95	-4.49
			CDD	AVG	242	62	1134/1201 (MCS11)	16.48	16.36	19.43	23.95	-4.52
			CDD	AVG	242	64	1134/1201 (MCS11)	16.27	16.40	19.35	23.95	-4.60
	5530	106	CDD	AVG	242	61	1134/1201 (MCS11)	14.93	14.81	17.88	23.68	-5.80
			CDD	AVG	242	62	1134/1201 (MCS11)	14.85	14.98	17.93	23.68	-5.75
			CDD	AVG	242	64	1134/1201 (MCS11)	14.83	14.87	17.86	23.68	-5.82
	5610	122	CDD	AVG	484	65	1134/1201 (MCS11)	18.88	18.90	21.90	23.68	-1.78
			CDD	AVG	484	66	1134/1201 (MCS11)	18.94	18.82	21.89	23.68	-1.79
	5690	138	CDD	AVG	484	65	1134/1201 (MCS11)	15.11	15.14	18.14	23.68	-5.54
CDD			AVG	484	66	1134/1201 (MCS11)	15.14	15.05	18.11	23.68	-5.57	
5775	155	CDD	AVG	484	65	1134/1201 (MCS11)	19.77	20.00	22.90	30.00	-7.10	
		CDD	AVG	484	66	1134/1201 (MCS11)	19.95	19.98	22.98	30.00	-7.02	

Table 7-74. FCC CDD 80MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 69 of 263

ISED CDD/SDM Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5180	36	SDM						
		SDM	AVG	106	54	270/286.8 (MCS11)	10.50	10.49	13.51	-	-	2.92	16.43	22.77	-6.34	
		SDM	AVG	106	53	270/286.8 (MCS11)	10.42	10.43	13.44	-	-	2.92	16.36	22.77	-6.41	
		SDM	AVG	106	54	270/286.8 (MCS11)	10.38	10.48	13.44	-	-	2.92	16.36	22.77	-6.41	
		SDM	AVG	106	53	270/286.8 (MCS11)	10.35	10.46	13.42	-	-	2.92	16.34	22.77	-6.43	
		SDM	AVG	106	54	270/286.8 (MCS11)	10.31	10.42	13.38	-	-	2.92	16.30	22.77	-6.47	
		CDD	AVG	106	53	270/286.8 (MCS11)	14.50	14.35	17.44	23.95	-6.51	5.88	23.32	29.95	-6.64	
		CDD	AVG	106	54	270/286.8 (MCS11)	14.50	14.50	17.51	23.95	-6.44	5.88	23.39	29.95	-6.57	
		CDD	AVG	106	53	270/286.8 (MCS11)	14.40	14.50	17.46	23.95	-6.49	5.88	23.34	29.95	-6.62	
		CDD	AVG	106	54	270/286.8 (MCS11)	14.36	14.47	17.43	23.95	-6.52	5.88	23.31	29.95	-6.65	
		CDD	AVG	106	53	270/286.8 (MCS11)	14.40	14.49	17.46	23.95	-6.49	5.88	23.34	29.95	-6.62	
		CDD	AVG	106	54	270/286.8 (MCS11)	14.50	14.50	17.51	23.95	-6.44	5.88	23.39	29.95	-6.57	
		CDD	AVG	106	53	270/286.8 (MCS11)	14.46	14.49	17.49	23.68	-6.19	5.22	22.71	29.68	-6.97	
		CDD	AVG	106	54	270/286.8 (MCS11)	14.49	14.50	17.51	23.68	-6.17	5.22	22.73	29.68	-6.95	
		CDD	AVG	106	53	270/286.8 (MCS11)	14.38	14.50	17.45	23.68	-6.23	5.22	22.67	29.68	-7.01	
		CDD	AVG	106	54	270/286.8 (MCS11)	14.37	14.33	17.36	23.68	-6.32	5.22	22.58	29.68	-7.10	
		CDD	AVG	106	53	270/286.8 (MCS11)	14.48	14.36	17.43	23.68	-6.25	5.22	22.65	29.68	-7.03	
		CDD	AVG	106	54	270/286.8 (MCS11)	14.30	14.40	17.36	23.68	-6.32	5.22	22.58	29.68	-7.10	
		CDD	AVG	106	53	270/286.8 (MCS11)	16.84	16.99	19.93	30.00	-10.07	4.78	24.71	-	-	
		CDD	AVG	106	54	270/286.8 (MCS11)	16.91	16.89	19.91	30.00	-10.09	4.78	24.69	-	-	
		CDD	AVG	106	53	270/286.8 (MCS11)	16.91	16.95	19.94	30.00	-10.06	4.78	24.72	-	-	
		CDD	AVG	106	54	270/286.8 (MCS11)	16.97	16.83	19.91	30.00	-10.09	4.78	24.69	-	-	
		CDD	AVG	106	53	270/286.8 (MCS11)	16.80	16.75	19.79	30.00	-10.21	4.78	24.57	-	-	
		CDD	AVG	106	54	270/286.8 (MCS11)	16.78	16.72	19.76	30.00	-10.24	4.78	24.54	-	-	

Table 7-75. ISED CDD/SDM 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5190	38	SDM						
		SDM	AVG	242	62	540/573.5 (MCS11)	12.50	12.32	15.42	-	-	2.92	18.34	22.77	-4.43	
		SDM	AVG	242	61	540/573.5 (MCS11)	12.38	12.30	15.35	-	-	2.92	18.27	22.77	-4.50	
		SDM	AVG	242	62	540/573.5 (MCS11)	12.41	12.49	15.46	-	-	2.92	18.38	22.77	-4.39	
		CDD	AVG	242	61	540/573.5 (MCS11)	16.41	16.42	19.43	23.95	-4.52	5.88	25.31	29.95	-4.65	
		CDD	AVG	242	62	540/573.5 (MCS11)	16.31	16.30	19.32	23.95	-4.63	5.88	25.20	29.95	-4.76	
		CDD	AVG	242	61	540/573.5 (MCS11)	16.23	16.36	19.31	23.95	-4.64	5.88	25.19	29.95	-4.77	
		CDD	AVG	242	62	540/573.5 (MCS11)	16.33	16.21	19.28	23.95	-4.67	5.88	25.16	29.95	-4.80	
		CDD	AVG	242	61	540/573.5 (MCS11)	14.86	14.92	17.90	23.68	-5.78	5.22	23.12	29.68	-6.56	
		CDD	AVG	242	62	540/573.5 (MCS11)	14.73	15.00	17.88	23.68	-5.80	5.22	23.10	29.68	-6.58	
		CDD	AVG	242	61	540/573.5 (MCS11)	16.39	16.47	19.44	23.68	-4.24	5.22	24.66	29.68	-5.02	
		CDD	AVG	242	62	540/573.5 (MCS11)	16.40	16.49	19.46	23.68	-4.22	5.22	24.68	29.68	-5.00	
		CDD	AVG	242	61	540/573.5 (MCS11)	16.23	16.31	19.28	23.68	-4.40	5.22	24.50	29.68	-5.18	
		CDD	AVG	242	62	540/573.5 (MCS11)	16.36	16.48	19.43	23.68	-4.25	5.22	24.65	29.68	-5.03	
		CDD	AVG	242	61	540/573.5 (MCS11)	14.62	14.71	17.68	23.68	-6.00	5.22	22.90	29.68	-6.78	
		CDD	AVG	242	62	540/573.5 (MCS11)	14.67	14.63	17.66	23.68	-6.02	5.22	22.88	29.68	-6.80	
		CDD	AVG	242	61	540/573.5 (MCS11)	19.76	19.91	22.85	30.00	-7.15	5.22	28.07	-	-	
		CDD	AVG	242	62	540/573.5 (MCS11)	19.93	19.98	22.97	30.00	-7.03	4.78	27.75	-	-	
		CDD	AVG	242	61	540/573.5 (MCS11)	19.84	19.81	22.84	30.00	-7.16	4.78	27.62	-	-	
		CDD	AVG	242	62	540/573.5 (MCS11)	19.87	20.00	22.95	30.00	-7.05	4.78	27.73	-	-	

Table 7-76. ISED CDD/SDM 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5210	42	SDM						
		SDM	AVG	242	62	1134/1201 (MCS11)	12.49	12.47	15.49	-	-	2.92	18.41	22.77	-4.36	
		SDM	AVG	242	64	1134/1201 (MCS11)	12.50	12.39	15.49	-	-	2.92	18.38	22.77	-4.39	
		CDD	AVG	242	61	1134/1201 (MCS11)	16.45	16.44	19.46	23.95	-4.49	5.88	25.34	29.95	-4.62	
		CDD	AVG	242	62	1134/1201 (MCS11)	16.48	16.36	19.43	23.95	-4.52	5.88	25.31	29.95	-4.65	
		CDD	AVG	242	64	1134/1201 (MCS11)	16.27	16.40	19.35	23.95	-4.60	5.88	25.23	29.95	-4.73	
		CDD	AVG	242	61	1134/1201 (MCS11)	14.93	14.81	17.88	23.68	-5.80	5.22	23.10	29.68	-6.58	
		CDD	AVG	242	62	1134/1201 (MCS11)	14.85	14.98	17.93	23.68	-5.75	5.22	23.15	29.68	-6.53	
		CDD	AVG	242	64	1134/1201 (MCS11)	14.83	14.87	17.86	23.68	-5.82	5.22	23.08	29.68	-6.60	
		CDD	AVG	484	65	1134/1201 (MCS11)	15.11	15.14	18.14	23.68	-5.54	5.22	23.36	29.68	-6.32	
		CDD	AVG	484	66	1134/1201 (MCS11)	15.14	15.05	18.11	23.68	-5.57	5.22	23.33	29.68	-6.35	
		CDD	AVG	484	65	1134/1201 (MCS11)	19.77	20.00	22.90	30.00	-7.10	4.78	27.68	-	-	
		CDD	AVG	484	66	1134/1201 (MCS11)	19.95	19.98	22.98	30.00	-7.02	4.78	27.76	-	-	

Table 7-77. ISED CDD/SDM 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 70 of 263

FCC CDD Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
	5180	36	CDD	AVG	242	61	270/286.8 (MCS11)	15.58	15.75	18.68	23.98	-5.30
5200	40	CDD	AVG	242	61	270/286.8 (MCS11)	16.44	16.44	19.45	23.98	-4.53	
5240	48	CDD	AVG	242	61	270/286.8 (MCS11)	16.40	16.50	19.46	23.98	-4.52	
5260	52	CDD	AVG	242	61	270/286.8 (MCS11)	16.44	16.41	19.44	23.95	-4.51	
5300	60	CDD	AVG	242	61	270/286.8 (MCS11)	16.28	16.34	19.32	23.95	-4.63	
5320	64	CDD	AVG	242	61	270/286.8 (MCS11)	16.40	16.46	19.44	23.95	-4.51	
5500	100	CDD	AVG	242	61	270/286.8 (MCS11)	14.86	14.91	17.90	23.68	-5.78	
5520	104	CDD	AVG	242	61	270/286.8 (MCS11)	16.31	16.42	19.38	23.68	-4.30	
5580	116	CDD	AVG	242	61	270/286.8 (MCS11)	16.40	16.40	19.41	23.68	-4.27	
5680	136	CDD	AVG	242	61	270/286.8 (MCS11)	16.30	16.50	19.41	23.68	-4.27	
5700	140	CDD	AVG	242	61	270/286.8 (MCS11)	16.30	16.37	19.35	23.68	-4.33	
5720	144	CDD	AVG	242	61	270/286.8 (MCS11)	14.70	14.47	17.60	23.68	-6.08	
5745	149	CDD	AVG	242	61	270/286.8 (MCS11)	19.87	19.75	22.82	30.00	-7.18	
5785	157	CDD	AVG	242	61	270/286.8 (MCS11)	19.92	20.00	22.97	30.00	-7.03	
5825	165	CDD	AVG	242	61	270/286.8 (MCS11)	19.70	19.80	22.76	30.00	-7.24	

Table 7-78. FCC CDD 20MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
	5190	38	CDD	AVG	484	65	540/573.5 (MCS11)	12.19	12.09	15.15	23.98	-8.83
5230	46	CDD	AVG	484	65	540/573.5 (MCS11)	18.75	18.70	21.74	23.98	-2.24	
5270	54	CDD	AVG	484	65	540/573.5 (MCS11)	18.88	18.80	21.85	23.95	-2.10	
5310	62	CDD	AVG	484	65	540/573.5 (MCS11)	13.38	13.44	16.42	23.95	-7.53	
5510	102	CDD	AVG	484	65	540/573.5 (MCS11)	13.00	12.81	15.92	23.68	-7.76	
5550	110	CDD	AVG	484	65	540/573.5 (MCS11)	18.84	18.91	21.89	23.68	-1.79	
5630	126	CDD	AVG	484	65	540/573.5 (MCS11)	18.81	18.71	21.77	23.68	-1.91	
5670	134	CDD	AVG	484	65	540/573.5 (MCS11)	15.10	15.25	18.19	23.68	-5.49	
5710	142	CDD	AVG	484	65	540/573.5 (MCS11)	18.98	18.83	21.92	23.68	-1.76	
5755	151	CDD	AVG	484	65	540/573.5 (MCS11)	19.92	19.92	22.93	30.00	-7.07	
5795	159	CDD	AVG	484	65	540/573.5 (MCS11)	19.88	20.00	22.95	30.00	-7.05	

Table 7-79. FCC CDD 40MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
								Ant1	Ant2	Summed		
	5210	42	CDD	AVG	996	67	1134/1201 (MCS11)	10.59	10.64	13.63	23.98	-10.35
5290	58	CDD	AVG	996	67	1134/1201 (MCS11)	10.84	10.99	13.93	23.95	-10.02	
5530	106	CDD	AVG	996	67	1134/1201 (MCS11)	13.33	13.43	16.39	23.68	-7.29	
5610	122	CDD	AVG	996	67	1134/1201 (MCS11)	13.50	13.33	16.43	23.68	-7.25	
5690	138	CDD	AVG	996	67	1134/1201 (MCS11)	19.89	19.95	22.93	23.68	-0.75	
5775	155	CDD	AVG	996	67	1134/1201 (MCS11)	16.21	16.17	19.20	30.00	-10.80	

Table 7-80. FCC CDD 80MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 71 of 263

ISED CDD/SDM Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5180	36	SDM						
5200	40	SDM	AVG	242	61	270/286.8 (MCS11)	12.48	12.24	15.37	-	-	2.92	18.29	22.77	-4.48	
5240	48	SDM	AVG	242	61	270/286.8 (MCS11)	12.36	12.38	15.38	-	-	2.92	18.30	22.77	-4.47	
5260	52	CDD	AVG	242	61	270/286.8 (MCS11)	16.44	16.41	19.44	23.95	-4.51	5.88	25.32	29.95	-4.64	
5300	60	CDD	AVG	242	61	270/286.8 (MCS11)	16.28	16.34	19.32	23.95	-4.63	5.88	25.20	29.95	-4.76	
5320	64	CDD	AVG	242	61	270/286.8 (MCS11)	16.40	16.46	19.44	23.95	-4.51	5.88	25.32	29.95	-4.64	
5500	100	CDD	AVG	242	61	270/286.8 (MCS11)	14.86	14.91	17.90	23.68	-5.78	5.22	23.12	29.68	-6.56	
5520	104	CDD	AVG	242	61	270/286.8 (MCS11)	16.31	16.42	19.38	23.68	-4.30	5.22	24.60	29.68	-5.08	
5540	108	CDD	AVG	242	61	270/286.8 (MCS11)	16.50	16.49	19.51	23.68	-4.17	5.22	24.73	29.68	-4.95	
5580	116	CDD	AVG	242	61	270/286.8 (MCS11)	16.40	16.40	19.41	23.68	-4.27	5.22	24.63	29.68	-5.05	
5680	136	CDD	AVG	242	61	270/286.8 (MCS11)	16.30	16.50	19.41	23.68	-4.27	5.22	24.63	29.68	-5.05	
5700	140	CDD	AVG	242	61	270/286.8 (MCS11)	16.30	16.37	19.35	23.68	-4.33	5.22	24.57	29.68	-5.11	
5720	144	CDD	AVG	242	61	270/286.8 (MCS11)	14.70	14.47	17.60	23.68	-6.08	5.22	22.82	29.68	-6.86	
5745	149	CDD	AVG	242	61	270/286.8 (MCS11)	19.87	19.75	22.82	30.00	-7.18	4.78	27.60	-	-	
5785	157	CDD	AVG	242	61	270/286.8 (MCS11)	19.92	20.00	22.97	30.00	-7.03	4.78	27.75	-	-	
5825	165	CDD	AVG	242	61	270/286.8 (MCS11)	19.70	19.80	22.76	30.00	-7.24	4.78	27.54	-	-	

Table 7-81. ISED CDD/SDM 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5190	38	SDM						
5230	46	SDM	AVG	484	65	540/573.5 (MCS11)	14.76	14.82	17.80	-	-	2.92	20.72	22.77	-2.05	
5270	54	CDD	AVG	484	65	540/573.5 (MCS11)	18.88	18.80	21.85	23.95	-2.10	5.88	27.73	29.95	-2.23	
5310	62	CDD	AVG	484	65	540/573.5 (MCS11)	13.38	13.44	16.42	23.95	-7.53	5.88	22.30	29.95	-7.66	
5510	102	CDD	AVG	484	65	540/573.5 (MCS11)	13.00	12.81	15.92	23.68	-7.76	5.22	21.14	29.68	-8.54	
5550	110	CDD	AVG	484	65	540/573.5 (MCS11)	18.84	18.91	21.89	23.68	-1.79	5.22	27.11	29.68	-2.57	
5670	134	CDD	AVG	484	65	540/573.5 (MCS11)	15.10	15.25	18.19	23.68	-5.49	5.22	23.41	29.68	-6.27	
5710	142	CDD	AVG	484	65	540/573.5 (MCS11)	18.98	18.83	21.92	23.68	-1.76	5.22	27.14	29.68	-2.54	
5755	151	CDD	AVG	484	65	540/573.5 (MCS11)	19.92	19.92	22.93	30.00	-7.07	4.78	27.71	-	-	
5795	159	CDD	AVG	484	65	540/573.5 (MCS11)	19.88	20.00	22.95	30.00	-7.05	4.78	27.73	-	-	

Table 7-82. ISED CDD/SDM 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
								Ant1	Ant2	Summed						
								5210	42	SDM						
5290	58	CDD	AVG	996	67	1134/1201 (MCS11)	10.84	10.99	13.93	23.95	-10.02	5.88	19.81	29.95	-10.15	
5530	106	CDD	AVG	996	67	1134/1201 (MCS11)	13.33	13.43	16.39	23.68	-7.29	5.22	21.61	29.68	-8.07	
5690	138	CDD	AVG	996	67	1134/1201 (MCS11)	19.89	19.95	22.93	23.68	-0.75	5.22	28.15	29.68	-1.53	
5775	155	CDD	AVG	996	67	1134/1201 (MCS11)	16.21	16.17	19.20	30.00	-10.80	4.78	23.98	-	-	

Table 7-83. ISED CDD 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 72 of 263

Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E)1), the conducted powers at Ant 1 and Ant 2 were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Subclause 14.4.3, the correlated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10-2013 Subclause 14.4.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5180MHz in 802.11ax (20MHz BW) mode, the average conducted output power was measured to be 4.49 dBm for Ant 1 and 4.47 dBm for Ant 2.

$$\text{Ant 1} + \text{Ant 2} = \text{CDD/SDM}$$

$$(4.49 \text{ dBm} + 4.47 \text{ dBm}) = (2.81 \text{ mW} + 2.80 \text{ mW}) = 5.61 \text{ mW} = 7.49 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11ax (20MHz BW, SDM) mode, the average CDD/SDM conducted power was calculated to be 7.49 dBm with directional gain of 2.92 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$7.49 \text{ dBm} + 2.92 \text{ dBi} = 10.41 \text{ dBm}$$

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device
		Page 73 of 263

7.5 Maximum Power Spectral Density – 802.11ax OFDMA

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Subclause 12.3.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10-2013 – Subclause 14.3.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. All of the partially-loaded RU configurations have been investigated for Power Spectral Density measurement and among all partially-loaded RU configurations, the RU26 configuration was found to be the worst case. Therefore, only the RU26 (Partially-loaded RU) and RU242 (Fully-loaded RU) data are included in this section.
2. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel psd plots have been reported.

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 74 of 263

V 10.5 12/15/2021

Ant 1 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26	0	135/143.4 (MCS11)	8.39	11.0	-2.61
				26	4	135/143.4 (MCS11)	8.63	11.0	-2.37
				26	8	135/143.4 (MCS11)	9.66	11.0	-1.34
	5200	40	ax (20MHz)	26	0	135/143.4 (MCS11)	9.29	11.0	-1.71
				26	4	135/143.4 (MCS11)	8.69	11.0	-2.31
				26	8	135/143.4 (MCS11)	9.42	11.0	-1.58
	5240	48	ax (20MHz)	26	0	135/143.4 (MCS11)	9.36	11.0	-1.64
				26	4	135/143.4 (MCS11)	8.33	11.0	-2.67
				26	8	135/143.4 (MCS11)	9.35	11.0	-1.65
	5190	38	ax (40MHz)	26	0	271/286.8 (MCS11)	8.03	11.0	-2.97
				26	8	271/286.8 (MCS11)	8.97	11.0	-2.03
				26	17	271/286.8 (MCS11)	9.11	11.0	-1.89
	5230	46	ax (40MHz)	26	0	271/286.8 (MCS11)	8.56	11.0	-2.45
				26	8	271/286.8 (MCS11)	8.67	11.0	-2.33
				26	17	271/286.8 (MCS11)	8.48	11.0	-2.52
	5210	42	ax (80MHz)	26	0	567/600.5 (MCS11)	6.38	11.0	-4.62
				26	18	567/600.5 (MCS11)	5.29	11.0	-5.71
				26	36	567/600.5 (MCS11)	5.81	11.0	-5.19

Table 7-84. Band 1 Power Spectral Density Measurements Ant 1 (RU26)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 75 of 263

	Frequency [MHz]	Channel No.	802.11 Mode	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]	
Band 2A	5260	52	ax (20MHz)	52	37	135/143.4 (MCS11)	9.36	11.0	-1.64	
				52	38	135/143.4 (MCS11)	9.20	11.0	-1.80	
				52	40	135/143.4 (MCS11)	9.09	11.0	-1.91	
	5300	60	ax (20MHz)	52	37	135/143.4 (MCS11)	9.35	11.0	-1.65	
				52	38	135/143.4 (MCS11)	10.14	11.0	-0.86	
				52	40	135/143.4 (MCS11)	9.78	11.0	-1.22	
	5320	64	ax (20MHz)	52	37	135/143.4 (MCS11)	9.92	11.0	-1.08	
				52	38	135/143.4 (MCS11)	10.17	11.0	-0.83	
				52	40	135/143.4 (MCS11)	9.36	11.0	-1.64	
	5270	54	ax (40MHz)	52	37	271/286.8 (MCS11)	9.56	11.0	-1.44	
				52	40	271/286.8 (MCS11)	10.00	11.0	-1.00	
				52	44	271/286.8 (MCS11)	8.95	11.0	-2.05	
	5310	62	ax (40MHz)	52	37	271/286.8 (MCS11)	7.30	11.0	-3.71	
				52	40	271/286.8 (MCS11)	7.51	11.0	-3.49	
				52	44	271/286.8 (MCS11)	6.79	11.0	-4.21	
	5290	58	ax (80MHz)	52	37	567/600.5 (MCS11)	6.46	11.0	-4.54	
				52	44	567/600.5 (MCS11)	6.18	11.0	-4.82	
				52	52	567/600.5 (MCS11)	6.70	11.0	-4.30	
	Band 2C	5500	100	ax (20MHz)	52	37	135/143.4 (MCS11)	10.12	11.0	-0.88
					52	38	135/143.4 (MCS11)	10.30	11.0	-0.70
					52	40	135/143.4 (MCS11)	9.95	11.0	-1.05
5580		116	ax (20MHz)	52	37	135/143.4 (MCS11)	9.30	11.0	-1.71	
				52	38	135/143.4 (MCS11)	9.43	11.0	-1.57	
				52	40	135/143.4 (MCS11)	9.00	11.0	-2.00	
5700		140	ax (20MHz)	52	37	135/143.4 (MCS11)	9.53	11.0	-1.47	
				52	38	135/143.4 (MCS11)	9.84	11.0	-1.16	
				52	40	135/143.4 (MCS11)	9.10	11.0	-1.90	
5720		144	ax (20MHz)	52	37	135/143.4 (MCS11)	10.05	11.0	-0.95	
				52	38	135/143.4 (MCS11)	9.07	11.0	-1.93	
				52	40	135/143.4 (MCS11)	8.89	11.0	-2.11	
5510		102	ax (40MHz)	52	37	271/286.8 (MCS11)	8.00	11.0	-3.00	
				52	40	271/286.8 (MCS11)	8.58	11.0	-2.42	
				52	44	271/286.8 (MCS11)	7.78	11.0	-3.22	
5550		110	ax (40MHz)	52	37	271/286.8 (MCS11)	9.97	11.0	-1.03	
				52	40	271/286.8 (MCS11)	9.04	11.0	-1.96	
				52	44	271/286.8 (MCS11)	10.14	11.0	-0.86	
5670		134	ax (40MHz)	52	37	271/286.8 (MCS11)	10.27	11.0	-0.73	
				52	40	271/286.8 (MCS11)	9.10	11.0	-1.90	
				52	44	271/286.8 (MCS11)	8.87	11.0	-2.13	
5710	142	ax (40MHz)	52	37	271/286.8 (MCS11)	10.45	11.0	-0.55		
			52	40	271/286.8 (MCS11)	9.59	11.0	-1.41		
			52	44	271/286.8 (MCS11)	8.71	11.0	-2.29		
5530	106	ax (80MHz)	52	37	567/600.5 (MCS11)	7.20	11.0	-3.80		
			52	44	567/600.5 (MCS11)	8.04	11.0	-2.96		
			52	52	567/600.5 (MCS11)	7.04	11.0	-3.96		
5610*	122	ax (80MHz)	52	37	567/600.5 (MCS11)	9.94	11.0	-1.06		
			52	44	567/600.5 (MCS11)	10.36	11.0	-0.64		
			52	52	567/600.5 (MCS11)	10.46	11.0	-0.54		
5690	138	ax (80MHz)	52	37	567/600.5 (MCS11)	8.83	11.0	-2.17		
			52	44	567/600.5 (MCS11)	9.41	11.0	-1.59		
			52	52	567/600.5 (MCS11)	8.45	11.0	-2.56		

Table 7-85. Bands 2A, 2C Power Spectral Density Measurements Ant 1 (RU52)

*TDWR channel is not supported for ISED (denoted by a * next to the frequency)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 76 of 263

	Frequency [MHz]	Channel No.	802.11 Mode	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242	61	135/143.4 (MCS11)	5.37	11.0	-5.63
	5200	40	ax (20MHz)	242	61	135/143.4 (MCS11)	9.25	11.0	-1.75
	5240	48	ax (20MHz)	242	61	135/143.4 (MCS11)	8.69	11.0	-2.31
	5190	38	ax (40MHz)	484	65	271/286.8 (MCS11)	0.58	11.0	-10.42
	5230	46	ax (40MHz)	484	65	271/286.8 (MCS11)	7.00	11.0	-4.00
	5210	42	ax (80MHz)	996	67	567/600.5 (MCS11)	-3.54	11.0	-14.54
Band 2A	5260	52	ax (20MHz)	242	61	135/143.4 (MCS11)	9.71	11.0	-1.30
	5300	60	ax (20MHz)	242	61	135/143.4 (MCS11)	9.56	11.0	-1.44
	5320	64	ax (20MHz)	242	61	135/143.4 (MCS11)	7.47	11.0	-3.53
	5270	54	ax (40MHz)	484	65	271/286.8 (MCS11)	7.19	11.0	-3.81
	5310	62	ax (40MHz)	484	65	271/286.8 (MCS11)	1.34	11.0	-9.66
	5290	58	ax (80MHz)	996	67	567/600.5 (MCS11)	-4.78	11.0	-15.78
Band 2C	5500	100	ax (20MHz)	242	61	135/143.4 (MCS11)	5.98	11.0	-5.02
	5580	116	ax (20MHz)	242	61	135/143.4 (MCS11)	8.99	11.0	-2.01
	5700	140	ax (20MHz)	242	61	135/143.4 (MCS11)	5.98	11.0	-5.02
	5720	144	ax (20MHz)	242	61	135/143.4 (MCS11)	9.57	11.0	-1.44
	5510	102	ax (40MHz)	484	65	271/286.8 (MCS11)	-0.19	11.0	-11.19
	5550	110	ax (40MHz)	484	65	271/286.8 (MCS11)	6.84	11.0	-4.16
	5670	134	ax (40MHz)	484	65	271/286.8 (MCS11)	4.32	11.0	-6.69
	5710	142	ax (40MHz)	484	65	271/286.8 (MCS11)	6.70	11.0	-4.30
	5530	106	ax (80MHz)	996	67	567/600.5 (MCS11)	-2.59	11.0	-13.59
	5610*	122	ax (80MHz)	996	67	567/600.5 (MCS11)	1.07	11.0	-9.93
5690	138	ax (80MHz)	996	67	567/600.5 (MCS11)	3.92	11.0	-7.08	


Table 7-86. Bands 1, 2A, 2C Power Spectral Density Measurements Ant 1 (Fully-loaded RU)

*TDWR channel is not supported for ISED (denoted by a * next to the frequency)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 77 of 263

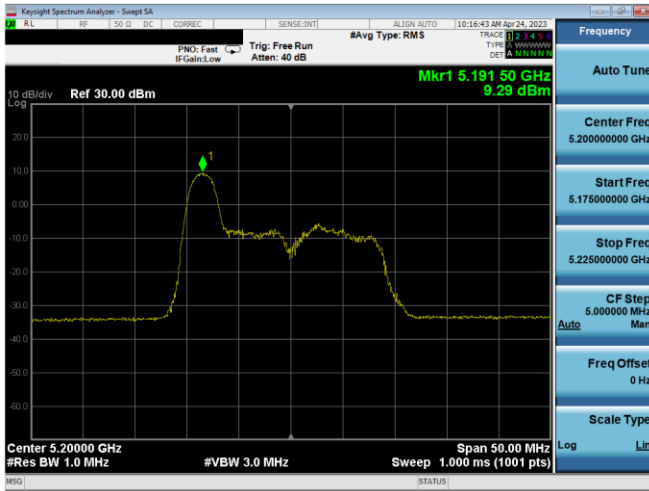


Plot 7-97. PSD Ant 1 (20MHz BW 11ax Index 0 – RU26 – Ch.40)

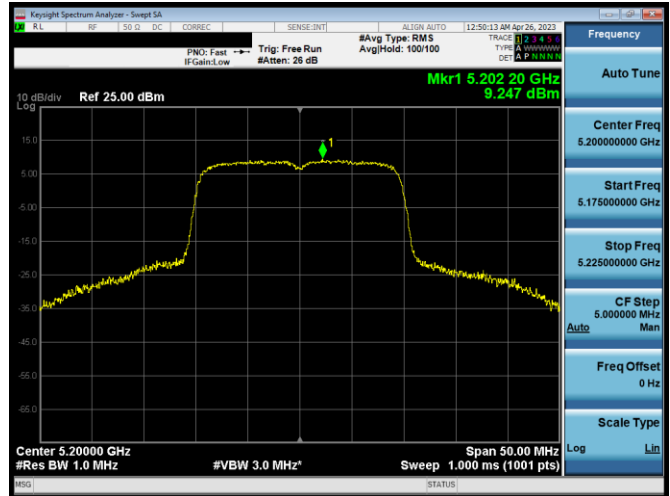


Plot 7-100. PSD Ant 1 (20MHz BW 11ax- RU242 – Ch.40)

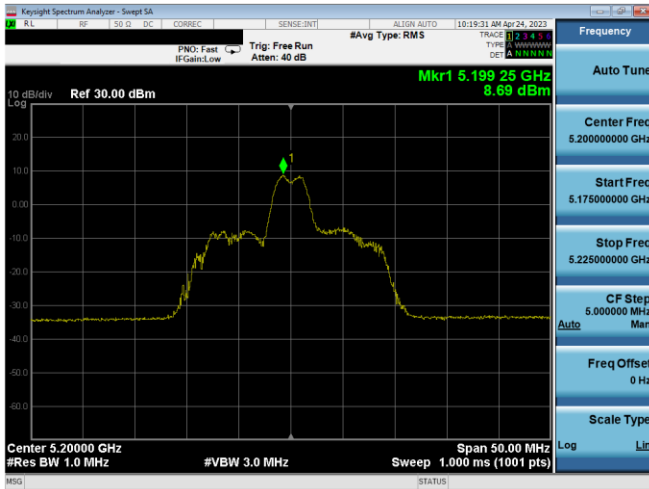


Plot 7-98. PSD Ant 1 (20MHz BW 11ax Index 4 – RU26 – Ch.40)

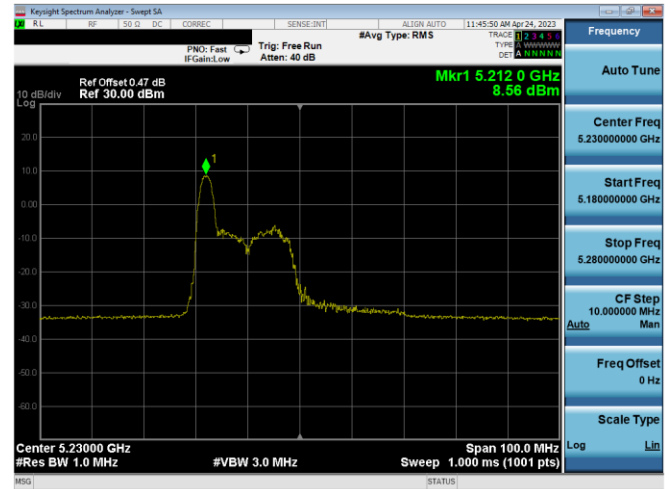

Plot 7-101. PSD Ant 1 (40MHz BW 11ax Index 0 – RU26 – Ch.46)

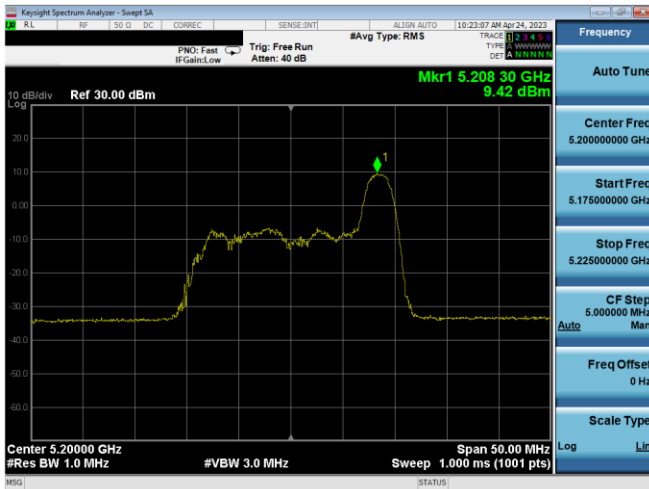


Plot 7-99. PSD Ant 1 (20MHz BW 11ax Index 8– RU26 – Ch.40)

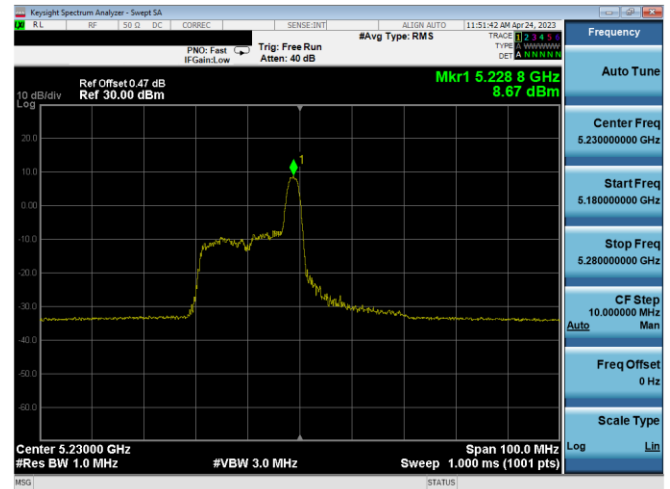


Plot 7-102. PSD Ant 1 (40MHz BW 11ax Index 8 – RU26 – Ch.46)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 78 of 263

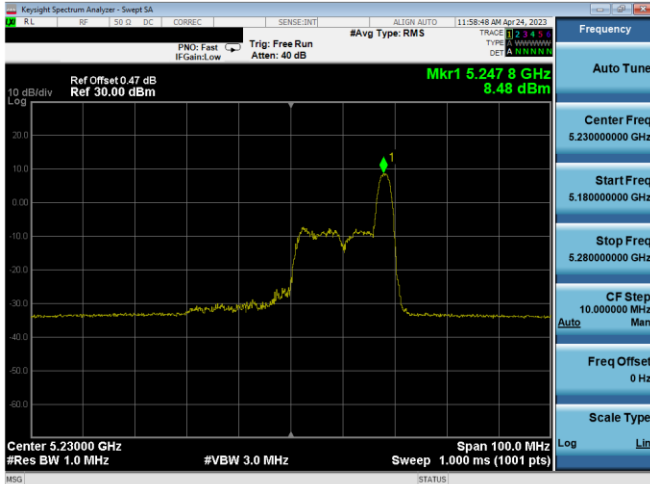


Plot 7-103. PSD Ant 1 (40MHz BW 11ax Index 17 – RU26 – Ch.46)

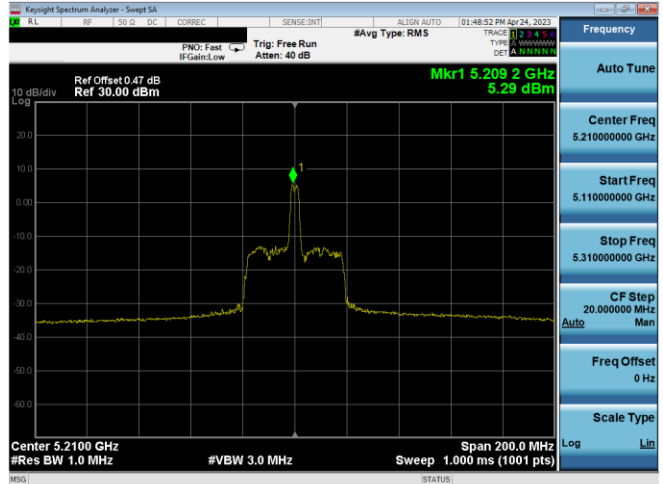


Plot 7-106. PSD Ant 1 (80MHz BW 11ax Index 18 – RU26 – Ch.42)

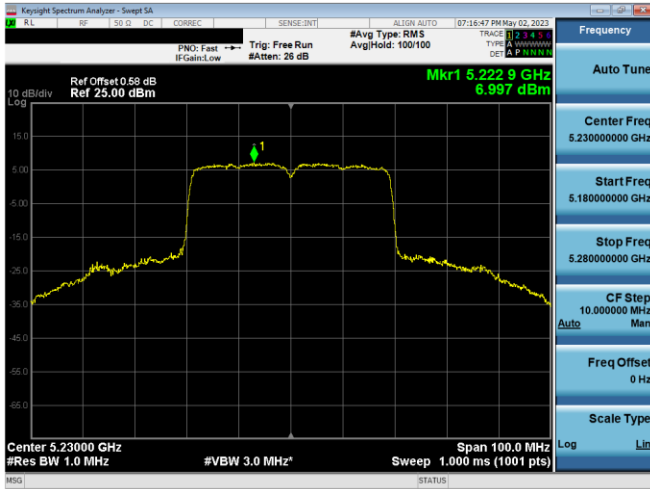


Plot 7-104. PSD Ant 1 (40MHz BW 11ax - RU484 - Ch.46)

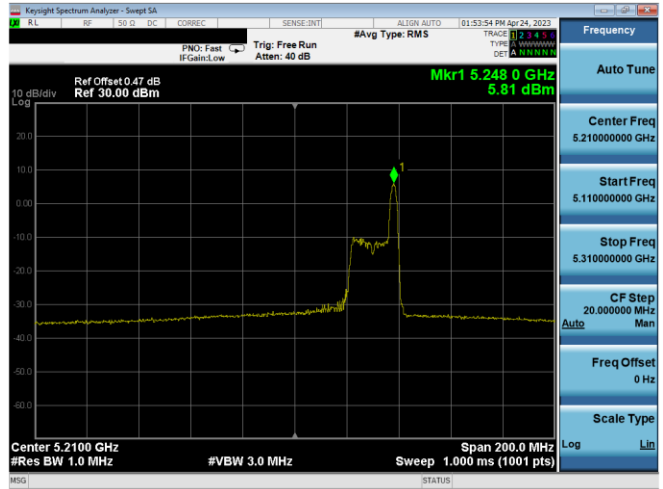

Plot 7-107. PSD Ant 1 (80MHz BW 11ax Index 36 – RU26 – Ch.42)

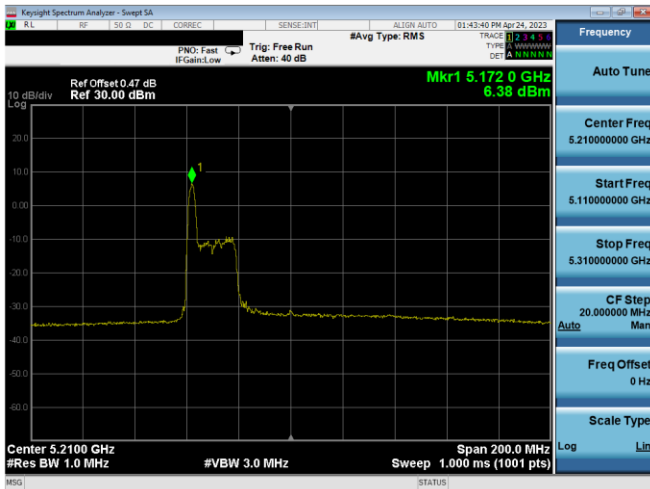


Plot 7-105. PSD Ant 1 (80MHz BW 11ax Index 0 – RU26 – Ch.42)

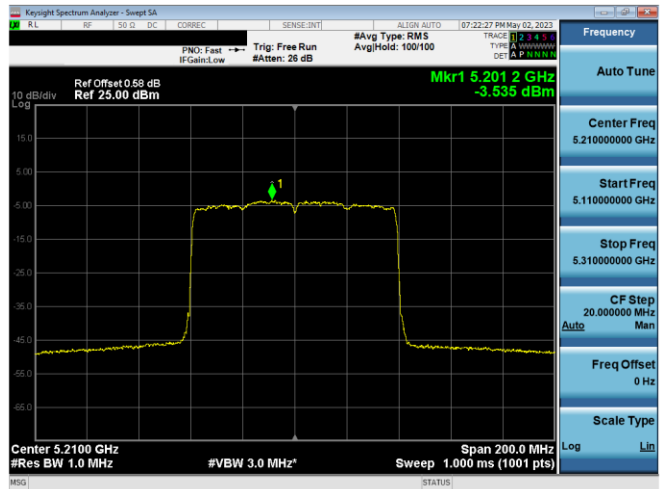


Plot 7-108. PSD Ant 1 (80MHz BW 11ax - RU996 - Ch.42)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 79 of 263

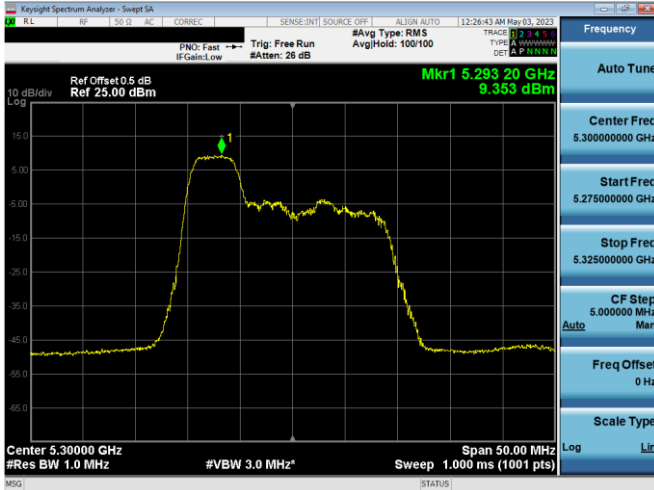


Plot 7-109. PSD Ant 1 (20MHz BW 11ax Index 37 – RU52 – Ch.60)

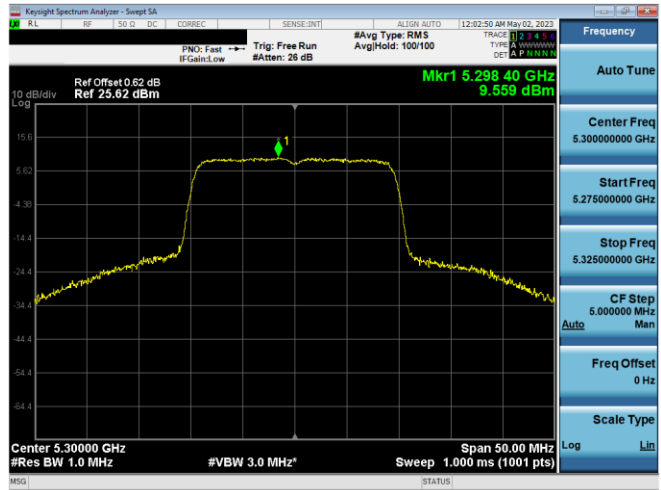


Plot 7-112. PSD Ant 1 (20MHz BW 11ax- RU242 – Ch.60)

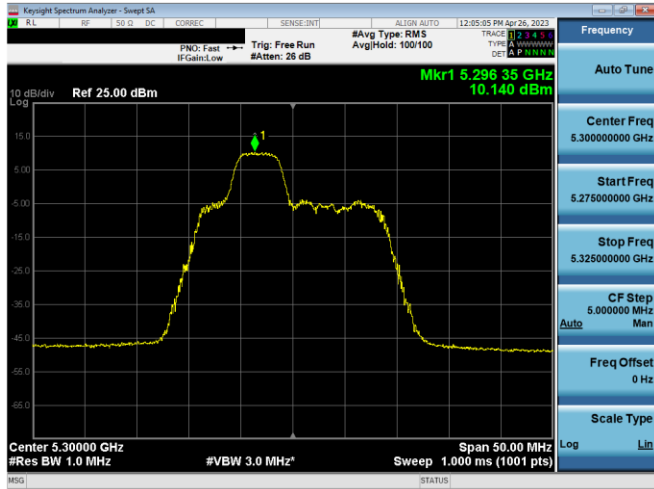


Plot 7-110. PSD Ant 1 (20MHz BW 11ax Index 38 – RU52 – Ch.60)

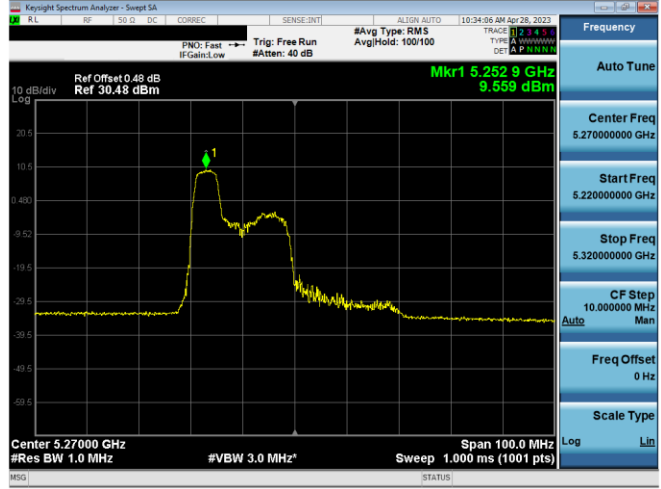

Plot 7-113. PSD Ant 1 (40MHz BW 11ax Index 37 – RU52 – Ch.54)

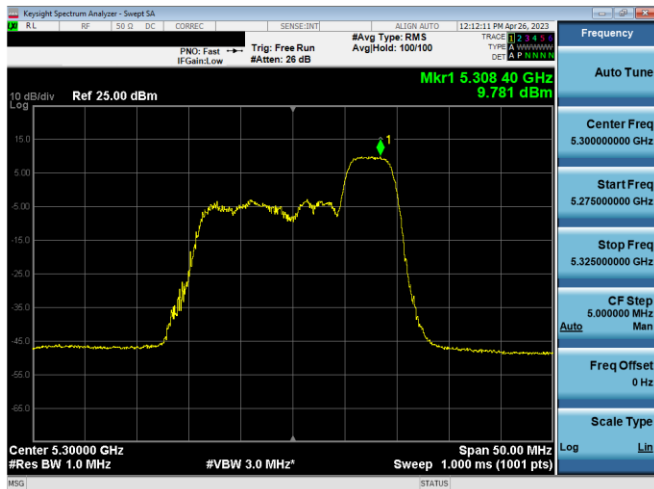


Plot 7-111. PSD Ant 1 (20MHz BW 11ax Index 40– RU52 – Ch.60)

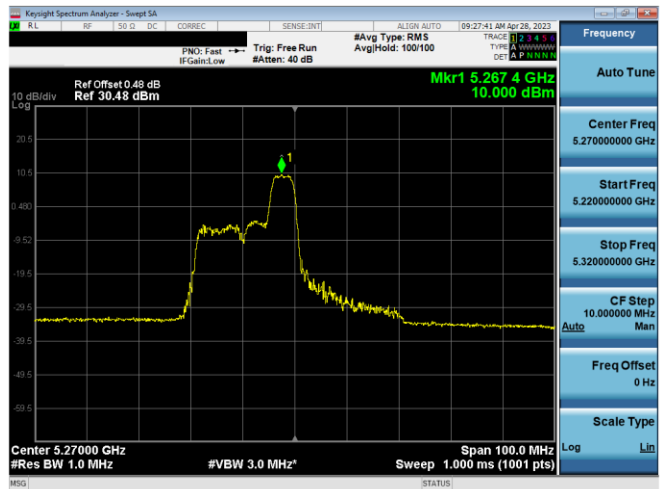


Plot 7-114. PSD Ant 1 (40MHz BW 11ax Index 40 – RU52 – Ch.54)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 80 of 263

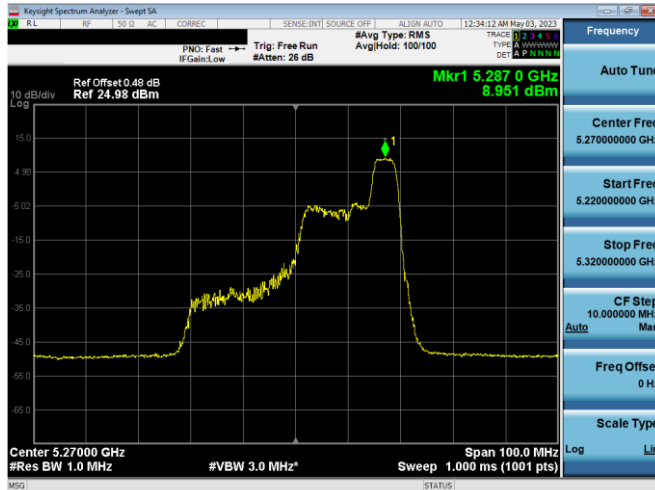


Plot 7-115. PSD Ant 1 (40MHz BW 11ax Index 44 – RU52 – Ch.54)

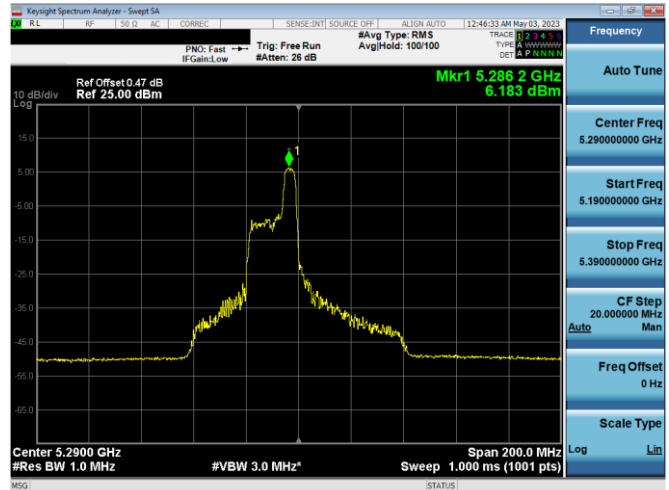


Plot 7-118. PSD Ant 1 (80MHz BW 11ax Index 44 – RU52 – Ch.58)

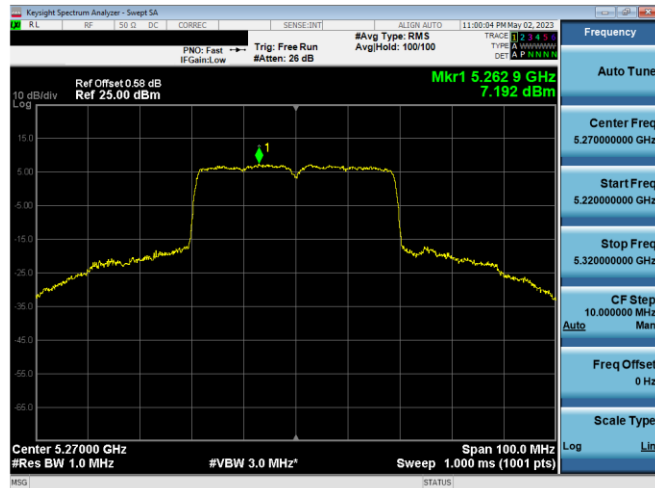


Plot 7-116. PSD Ant 1 (40MHz BW 11ax - RU484 - Ch.54)

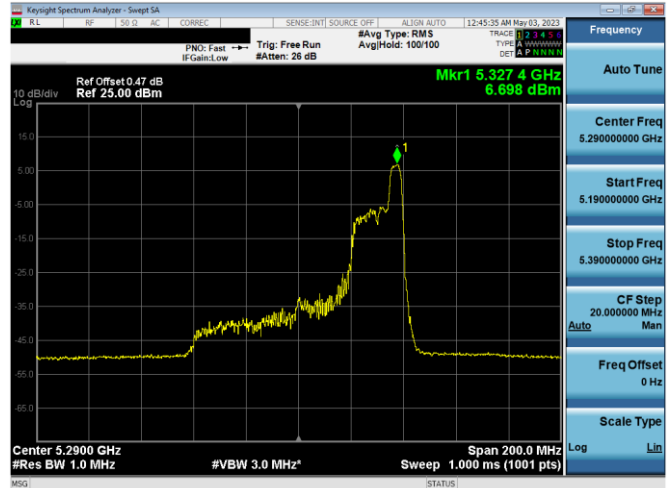

Plot 7-119. PSD Ant 1 (80MHz BW 11ax Index 52 – RU52 – Ch.58)

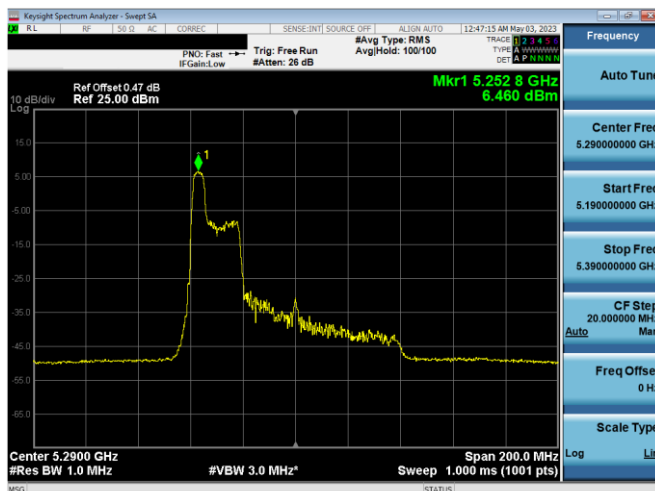

Plot 7-117. PSD Ant 1 (80MHz BW 11ax Index 37 – RU52 – Ch.58)

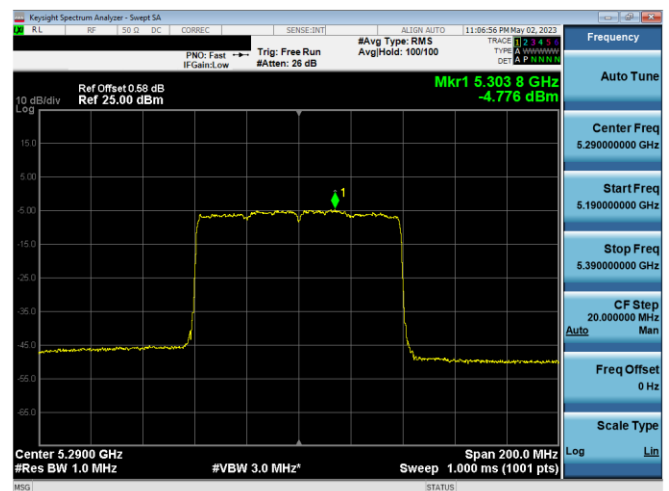

Plot 7-120. PSD Ant 1 (80MHz BW 11ax - RU996 - Ch.58)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-06.BCG	Test Dates: 2/20/2023 - 5/9/2023	EUT Type: Head Mounted Device	Page 81 of 263