

MEASUREMENT REPORT
FCC PART 15.247 / ISED RSS-247 Bluetooth

Applicant Name:

Apple Inc.
 One Apple Park Way
 Cupertino, CA 95014
 United States

Date of Testing:

2/10/2023 - 5/5/2023

Test Report Issue Date:

11/29/2023

Test Site/Location:

Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.:

1C2302130007-01.BCG

FCC ID:	BCGA2117
IC:	579C-A2117
APPLICANT:	Apple Inc.

Application Type:

Certification

Model/HVIN:

A2117

EUT Type:

Head Mounted Device

Max. RF Output Power:

106.66 mW (20.28 dBm) Peak Conducted

Frequency Range:

2402 – 2480MHz

Type of Modulation:

GFSK, $\pi/4$ -DQPSK, 8DPSK

FCC Classification:

FCC Part 15 Spread Spectrum Transmitter (DSS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:


RSS-247 Issue 3

Test Procedure(s):

ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
 Executive Vice President



FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 1 of 108

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Materials Technology Morgan Hill Test Location.....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities.....	4
2.3	Antenna Description	5
2.4	Test Support Equipment.....	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions.....	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA	12
7.0	TEST RESULTS	13
7.1	Summary.....	13
7.2	Bandwidth Measurement.....	14
7.3	Output Power Measurement.....	28
7.3.1	Peak Output Power Measurement.....	29
7.3.2	Average Output Power Measurement	31
7.4	Conducted Authorized Band Edge	34
7.5	Carrier Frequency Separation	47
7.6	Time of Occupancy.....	54
7.7	Number of Hopping Channels	59
7.8	Conducted Spurious Emissions.....	66
7.9	Radiated Spurious Emissions – Above 1GHz	76
7.9.1	Radiated Restricted Band Edge Measurements.....	92
7.10	Radiated Spurious Emissions – Below 1GHz.....	100
7.11	AC Line-Conducted Emissions Measurement	104
8.0	CONCLUSION.....	108

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 2 of 108

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Morgan Hill Test Location

These measurement tests were conducted at the Element Material Technology Morgan Hill facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology Morgan Hill is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology Morgan Hill facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Agreements (MRAs)

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 3 of 108

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Head Mounted Device FCC ID: BCGA2117 and IC: 579C-A2117**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by manufacturer and the following were confirmed:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

Test Device Serial No.: GPG3017001F20N78X, PYVWK6LLC6, WFGF7D9H60, MHP0XYH0XK, HP14K0WJ0Q

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, LE1M, LE2M, HDR4, HDR8, HDRp4, HDRp8)

This device supports BT Beamforming.

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 2-1. Bluetooth Frequency/ Channel Operations

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 4 of 108

Measured Duty Cycles					
Bluetooth Mode		Duty Cycle [%]			
		Ant1	Ant2	NB UNII_L	TxBF (Ant1 + Ant2)
GFSK	ePA	100	100	-	100
	iPA	100	100	100	100
8PSK	ePA	100	100	-	100
	iPA	100	100	100	100
$\pi/4$ -DQPSK	ePA	100	100	-	100
	iPA	100	100	100	100

Table 2-2. Measured Duty Cycles

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Simultaneous Tx Config	Ant1			Ant2			NB UNII_L		NB UNII_R
	WLAN 2.4G 802.11 b/g/n/ax	BT 2.4G BDR, EDR, HDR4/8, LE1M/2M, HDRp4/p8	WIFI 5G 802.11 a/n/ac/ax	WLAN 2.4G 802.11 b/g/n/ax	BT 2.4G BDR, EDR, HDR4/8, LE1M/2M, HDRp4/p8	WIFI 5G 802.11 a/n/ac/ax	BT 2.4G BDR, EDR, HDR4/8, LE1M/2M, HDRp4/p8	NB_UNII 5G BDR, HDR4/8, LE1M/2M, HDRp4/p8	NB_UNII 5G BDR, HDR4/8, LE1M/2M, HDRp4/p8
Config 1	✓	✗	✓	✗	✗	✗	✗	✓	✓
Config 2	✗	✗	✗	✓	✗	✓	✗	✓	✓
Config 3	✗	✓	✓	✗	✗	✗	✗	✓	✓
Config 4	✗	✓	✗	✗	✗	✓	✗	✓	✓
Config 5	✗	✓	✓	✗	✓	✗	✗	✗	✗
Config 6	✗	✓	✗	✗	✓	✓	✗	✗	✗
Config 7	✓	✗	✓	✗	✗	✗	✓	✓	✓
Config 8	✓	✗	✗	✗	✗	✓	✓	✓	✓
Config 9	✓	✗	✓	✗	✓	✗	✗	✗	✗
Config 10	✓	✗	✗	✗	✓	✓	✗	✗	✗
Config 11	✓	✗	✓	✓	✗	✓	✗	✗	✗
Config 12	✗	✓	✓	✗	✗	✓	✗	✗	✗
Config 13	✓	✗	✓	✗	✗	✓	✓	✗	✗

Table 2-3. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 7 and reported in UNII OFDM, Bluetooth LE, NB UNII LE and WLAN test reports.

2.3 Antenna Description

The following antenna gains provided by the manufacturer were used for testing.

Frequency [MHz]	Antenna Gain (dBi)		
	Ant1	Ant2	NB UNII_L
2402 - 2480	1.6	-1.0	-3.7

Table 2-4. Highest Antenna Gain

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device		Page 5 of 108

2.4 Test Support Equipment

1	Apple Macbook Pro	Model:	A2289	S/N:	C02DV7VGMD6T
	w/ AD/DC Adapter	Model:	A2164	S/N:	N/A
2	Apple USB-C Cable	Model:	Spartan	S/N:	000MKTR02U
3	Right Temple	Model:	N/A	S/N:	HTFGR70005J000020R
	Left Temple	Model:	N/A	S/N:	HTFGR40004A00002GY
	Headband	Model:	N/A	S/N:	GKNGNC0001H0000215
4	Light Seal	Model:	N/A	S/N:	GKNGQF000RX00003KB
	Light Seal Padding	Model:	N/A	S/N:	GKNGQ8001RD00002XA
5	EUT Power Pack	Model:	N/A	S/N:	HTFGQW0009800001MV

Table 2-5. Test Support Equipment List

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device		Page 6 of 108

V 10.5 12/15/2021

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was also used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, 7.6, 7.7, and 7.8 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT with power pack was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and the worst case was reported.

- EUT powered by AC/DC adaptor to USB-C Power Pack to Magnetic Charging Cable
- EUT powered by host PC via USB-C Power Pack to Magnetic Charging Cable

$\pi/4$ -DQPSK has been investigated and confirmed as not the worst case.

2.6 Software and Firmware

The test was conducted with firmware version 20.1.467.5718 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 7 of 108

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.12. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 8 of 108

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 9 of 108

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 10 of 108

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.77
Line Conducted Disturbance	2.70
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz - 1GHz)	4.75
Radiated Disturbance (1 - 18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 11 of 108

V 10.5 12/15/2021

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial #
Agilent	N9020A	MXA Signal Analyzer	4/26/2022	Annual	4/26/2023	MY56470202
Anritsu	MA2411B	Pulse Power Sensor	5/19/2022	Annual	5/19/2023	1911106
Anritsu	ML2496A	Power Meter	10/17/2022	Annual	10/17/2023	2002005
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18 GHz)	5/24/2022	Annual	5/24/2023	240049
Keysight Technologies	N9030A	PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
Rohde & Schwarz	180-442A-KF	Horn (Small)	3/6/2023	Annual	3/6/2024	T058701-2
Rohde & Schwarz	ENV216	Two-Line V-Network	3/30/2023	Annual	3/30/2024	101364
Rohde & Schwarz	FSVA3044	Signal Analyzer 44GHz	5/12/2022	Annual	5/12/2023	101098
Rohde & Schwarz	FSW43	Signal and Spectrum Analyzer 2Hz to 43GHz	5/19/2022	Annual	5/19/2023	104093
Rohde & Schwarz	FSW67	Signal and Spectrum Analyzer (2Hz-67GHz)	4/21/2022	Annual	4/21/2023	101366
Rohde & Schwarz	HFH-2Z2	9kHz - 30MHz Loop Antenna	4/13/2022	Annual	4/13/2023	100546
Rohde & Schwarz	TS-PR1	Preamplifier - Antenna System; 30MHz - 1GHz	4/18/2022	Annual	4/18/2023	102081
Rohde & Schwarz	TS-PR18	Pre Amplifier 1-18GHz	3/3/2023	Annual	3/3/2024	102130
Rohde & Schwarz	TS-PR1840	Pre Amplifier 18-40GHz	4/18/2022	Annual	4/18/2023	100050
Schwarzbeck	VULB9162	Biconilog Antenna - (30MHz-6GHz)	7/27/2022	Annual	7/27/2023	121034

Table 6-1. Test Equipment List

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 12 of 108

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2117
 IC: 579C-A2117
 Method/System: Frequency Hopping Spread Spectrum (FHSS)
 Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)	RSS-247 [5.1(a)]	20dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(1)	RSS-247 [5.4(b)]	Peak Transmitter Output Power	< 1 Watt if ≥ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(b)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(d)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.7
15.247(a)(1)(iii)	RSS-247 [5.1(d)]	Number of Channels	> 15 Channels		PASS	Section 7.6
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	> 20dBc		PASS	Section 7.4 Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.9.1, Section 7.10
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.11

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "BT Auto," Version 4.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 2.0.

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 13 of 108



7.2 Bandwidth Measurement

§2.1049; §15.247 (a.1); RSS-247 [5.1(a)]; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.10-2013 – Subclause 6.9.2
RSS-Gen [6.7]

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth and the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 - 5\% OBW$
3. $VBW \geq 3 \times RBW$
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 14 of 108

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 15 of 108

Ant1


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured 99% Occupied Bandwidth [kHz]	Measured 20dB Bandwidth [kHz]
2402	1.0	GFSK	ePA	0	881.59	952.6
2441	1.0	GFSK	ePA	39	880.43	952.3
2480	1.0	GFSK	ePA	78	879.30	950.7
2402	3.0	8DPSK	ePA	0	1210.80	1352.0
2441	3.0	8DPSK	ePA	39	1211.40	1352.0
2480	3.0	8DPSK	ePA	78	1211.30	1352.0

Table 7-2. 20dB BW and 99% OBW Measurements Ant1

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 16 of 108

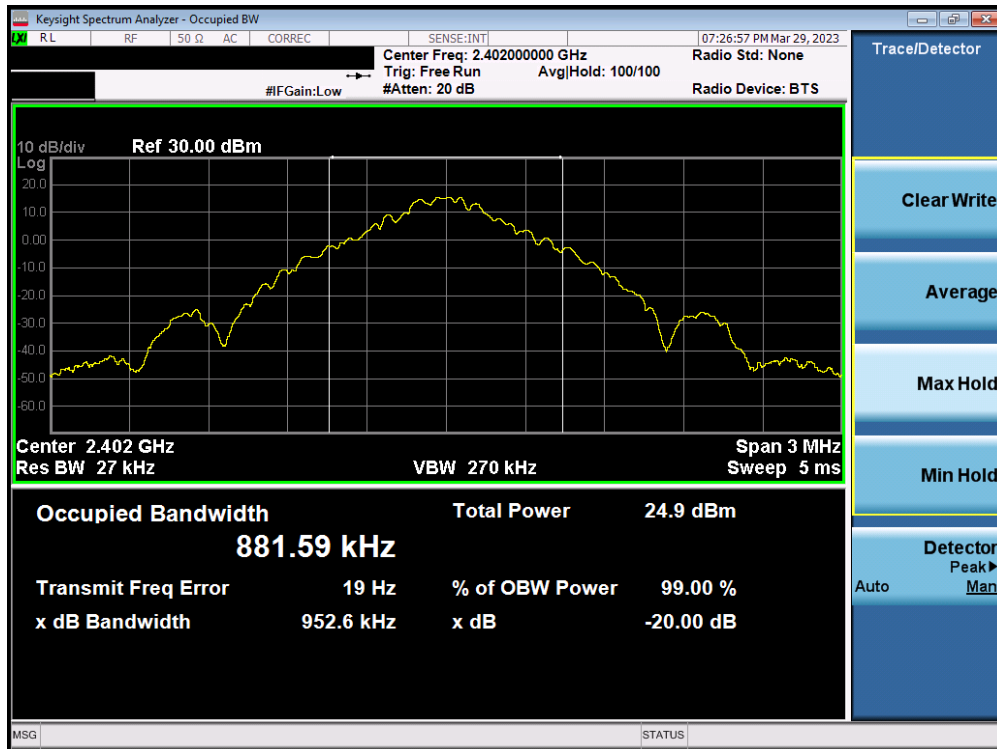


Plot 7-1. 20dB BW and 99% OBW Plot Ant1 (Bluetooth, GFSK, ePA – Ch.0)

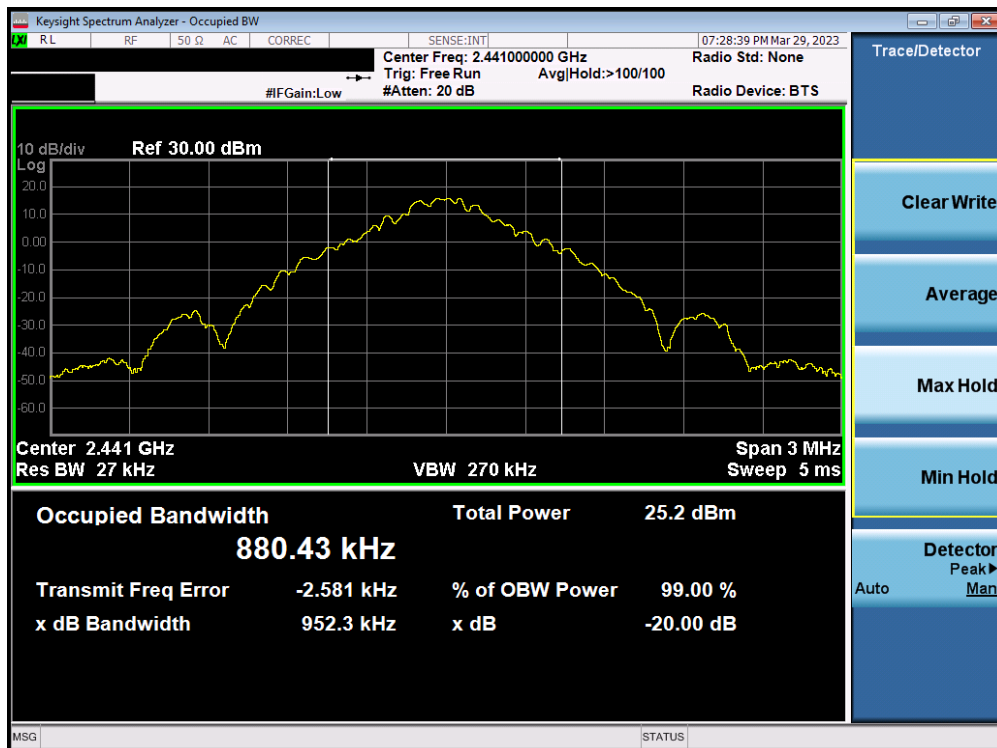


Plot 7-2. 20dB BW and 99% OBW Plot Ant1 (Bluetooth, GFSK, ePA – Ch.39)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 17 of 108

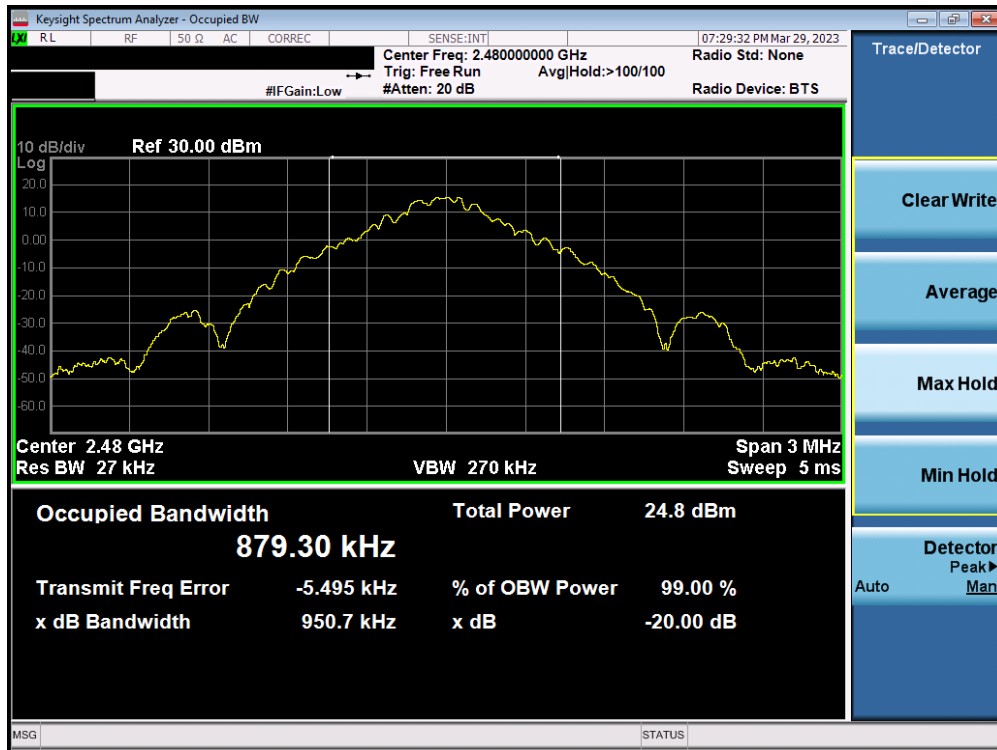


Plot 7-3. 20dB BW and 99% OBW Plot Ant1 (Bluetooth, GFSK, ePA – Ch.78)

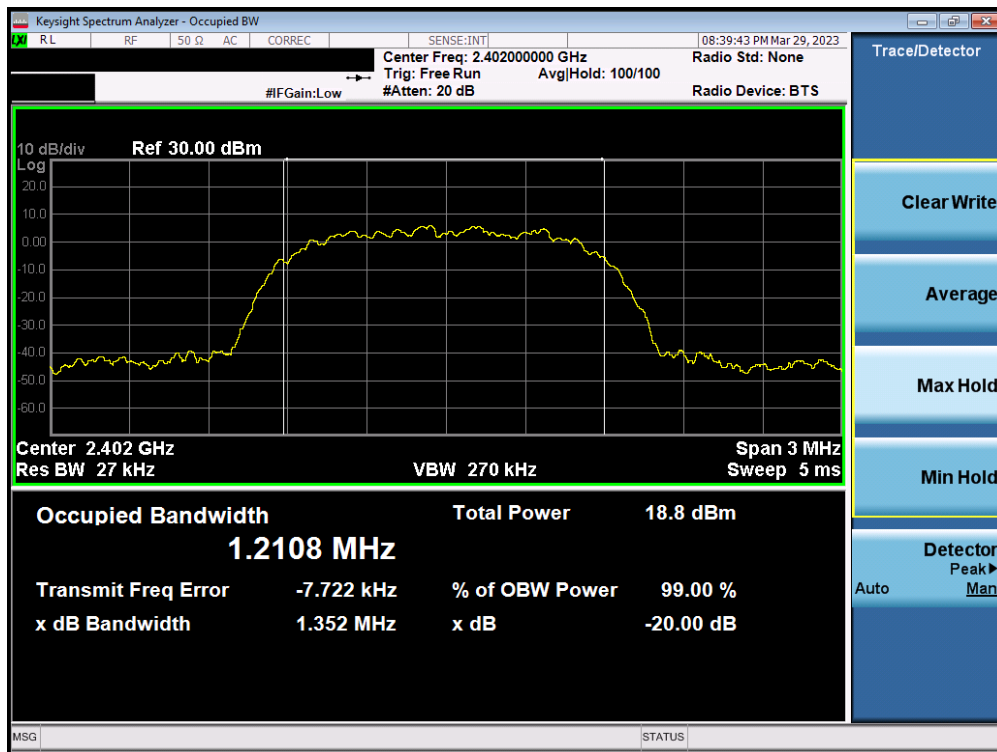


Plot 7-4. 20dB BW and 99% OBW Plot Ant1 (Bluetooth, 8DPSK, ePA – Ch.0)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 18 of 108

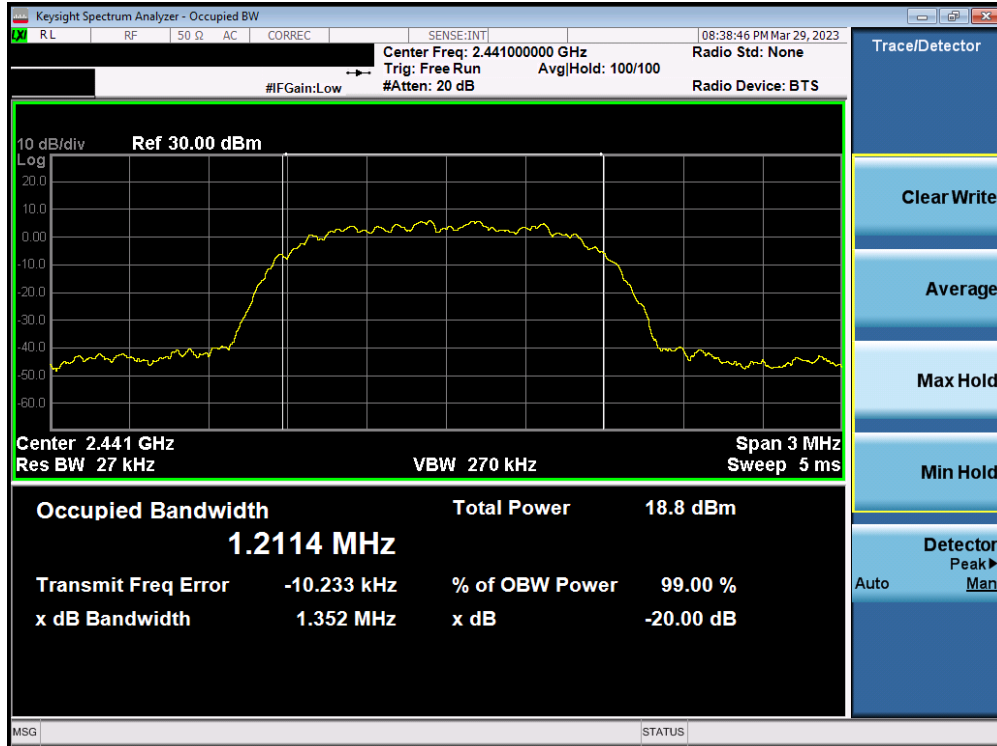

Plot 7-5. 20dB BW and 99% OBW Plot Ant1 (Bluetooth, 8DPSK, ePA – Ch.39)

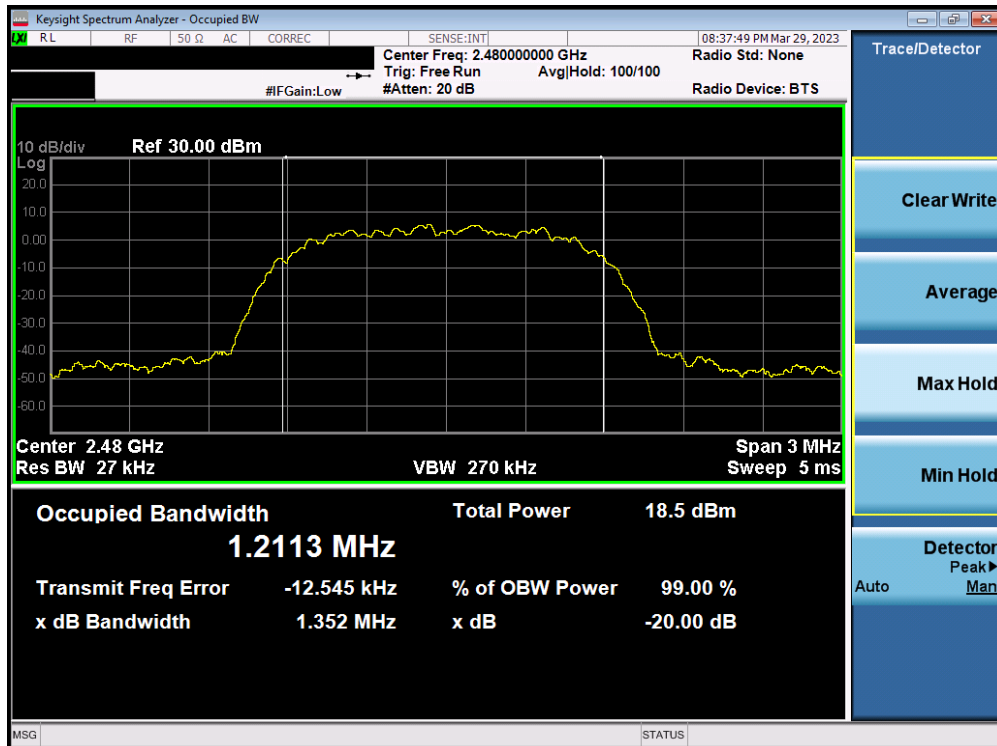

Plot 7-6. 20dB BW and 99% OBW Plot Ant1 (Bluetooth, 8DPSK, ePA – Ch.78)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 19 of 108

Ant2


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured 99% Occupied Bandwidth [kHz]	Measured 20dB Bandwidth [kHz]
2402	1.0	GFSK	ePA	0	881.89	951.50
2441	1.0	GFSK	ePA	39	882.01	953.80
2480	1.0	GFSK	ePA	78	881.21	951.80
2402	3.0	8DPSK	ePA	0	1211.80	1352.00
2441	3.0	8DPSK	ePA	39	1211.40	1353.00
2480	3.0	8DPSK	ePA	78	1211.40	1353.00

Table 7-3. 20dB BW and 99% OBW Bandwidth Measurements Ant2

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 20 of 108

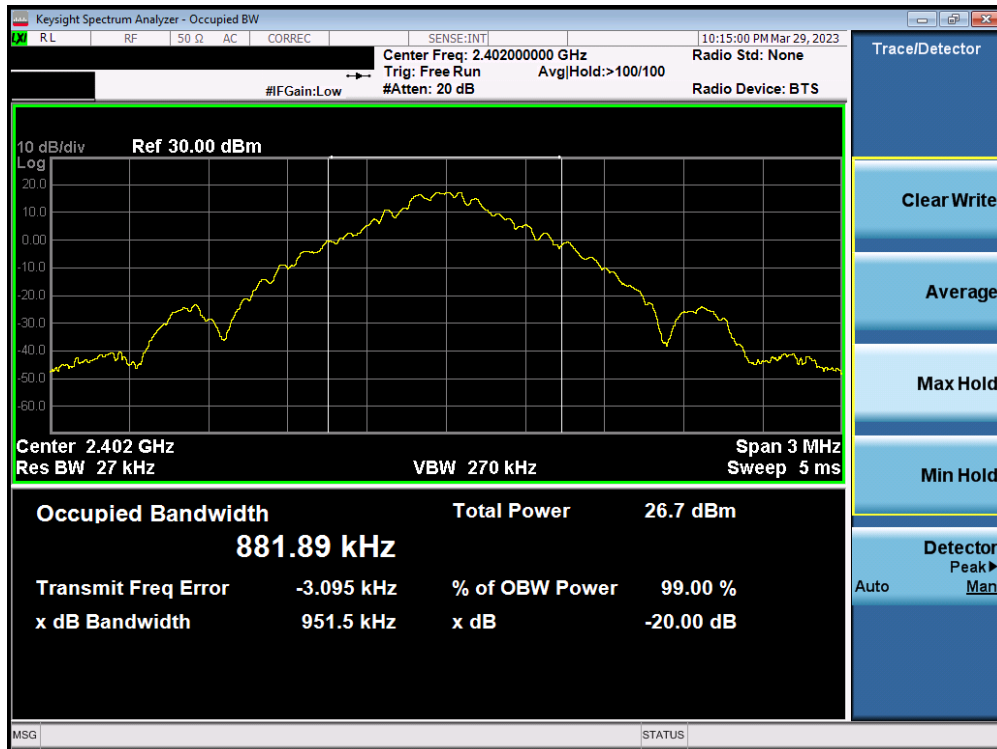


Plot 7-7. 20dB BW and 99% OBW Plot Ant2 (Bluetooth, GFSK, ePA – Ch.0)

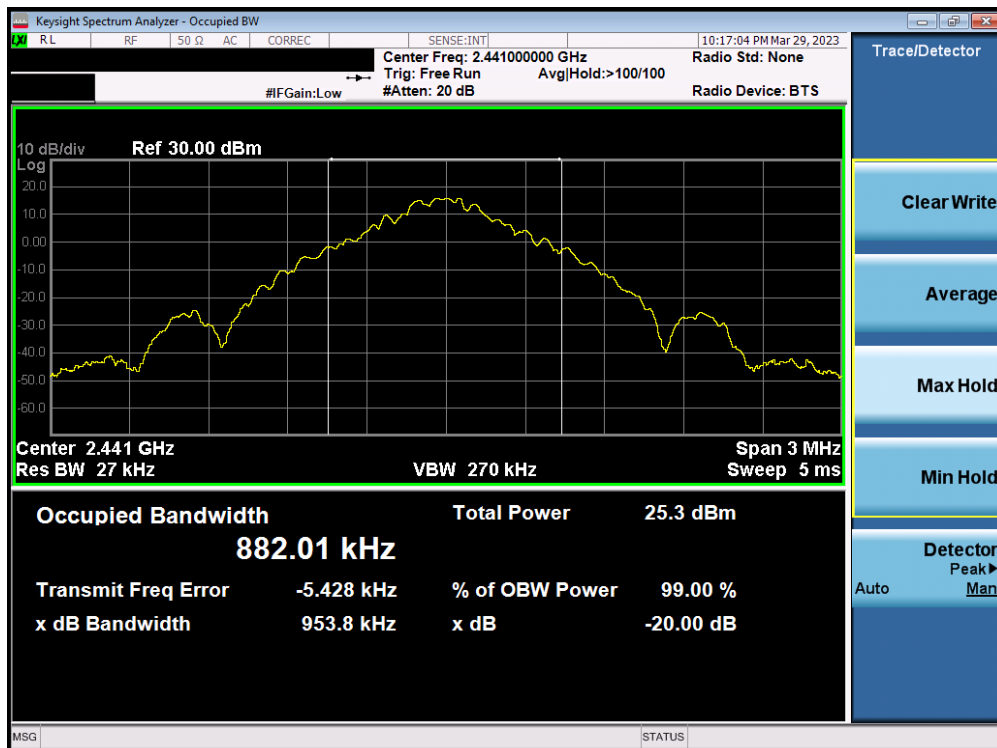


Plot 7-8. 20dB BW and 99% OBW Plot Ant2 (Bluetooth, GFSK, ePA – Ch.39)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 21 of 108

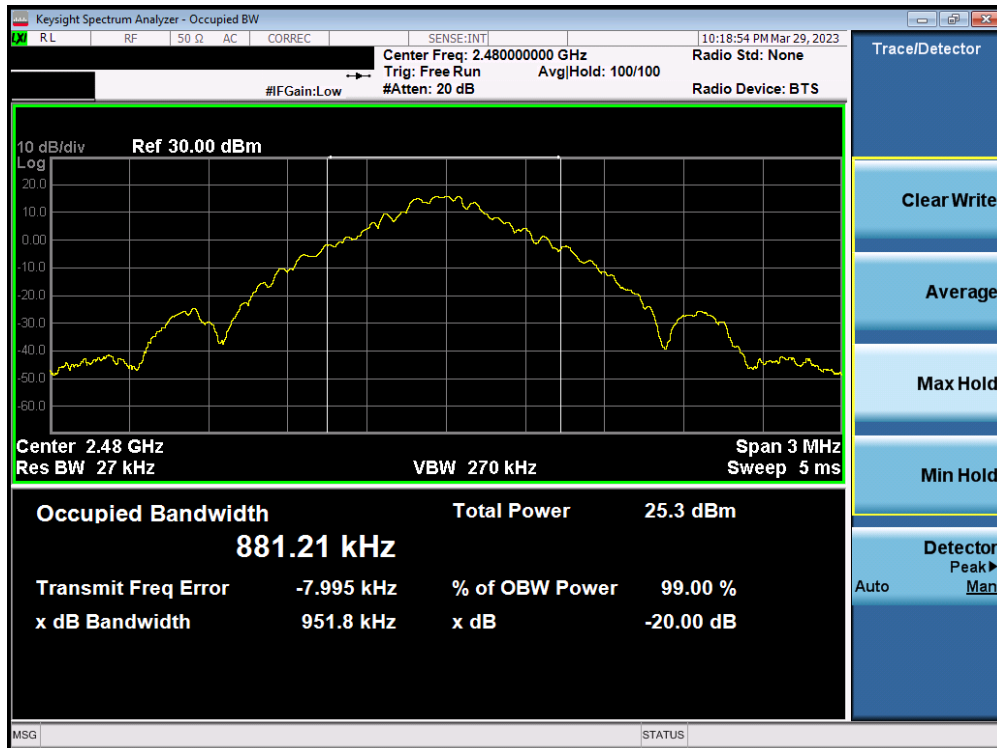


Plot 7-9. 20dB BW and 99% OBW Plot Ant2 (Bluetooth, GFSK, ePA – Ch.78)

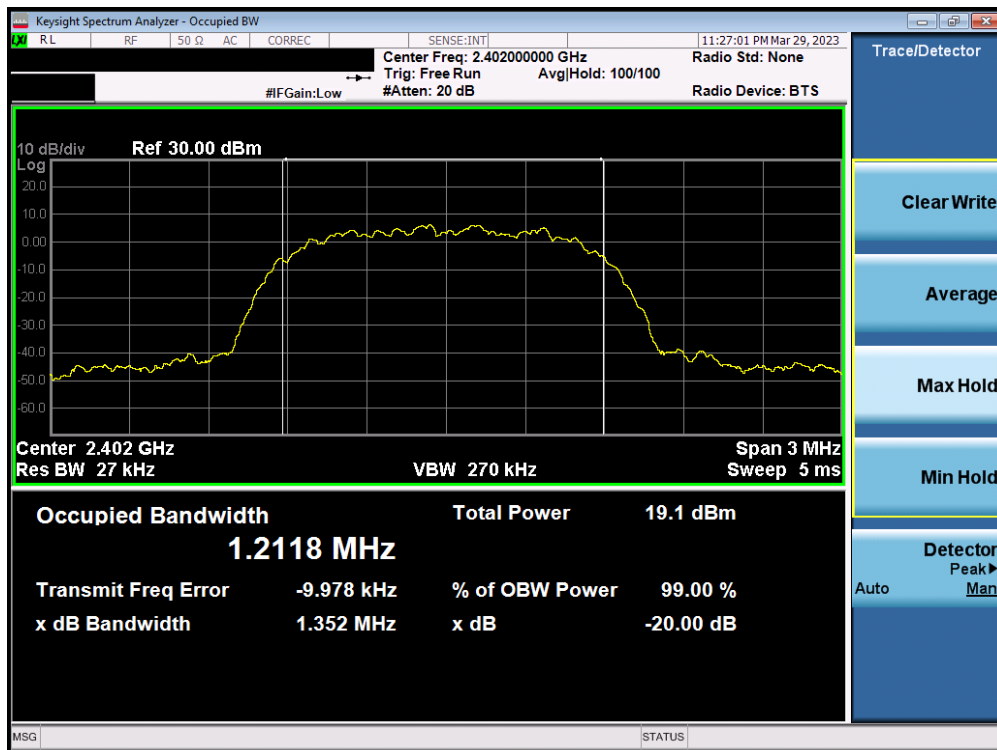


Plot 7-10. 20dB BW and 99% OBW Plot Ant2 (Bluetooth, 8DPSK, ePA – Ch.0)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 22 of 108

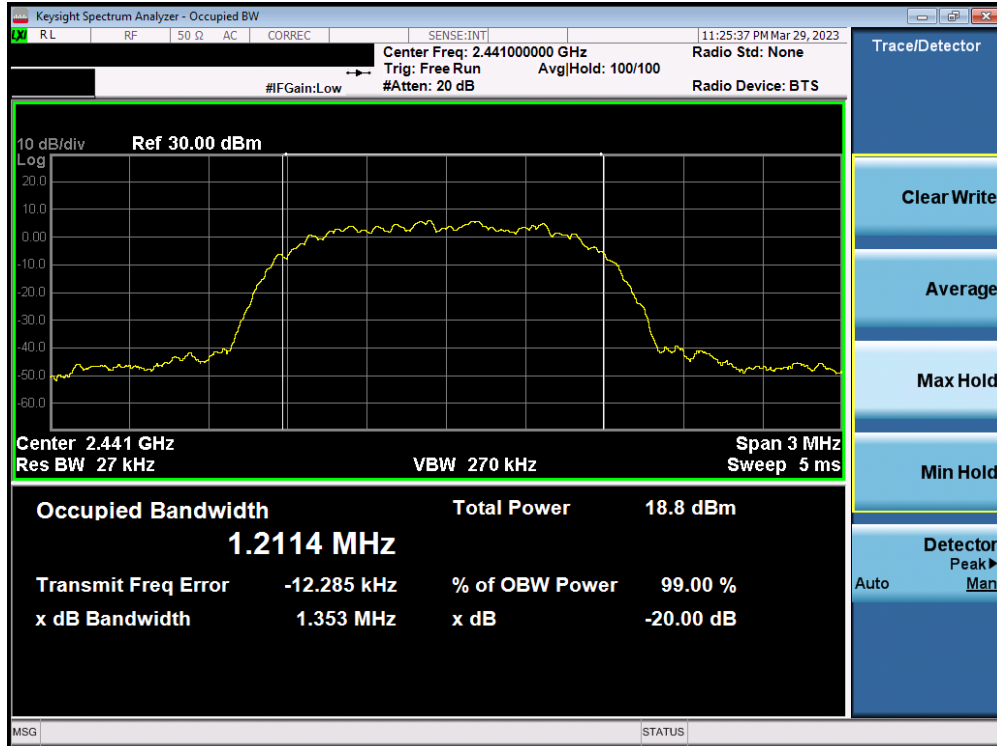

Plot 7-11. 20dB BW and 99% OBW Plot Ant2 (Bluetooth, 8DPSK, ePA – Ch.39)

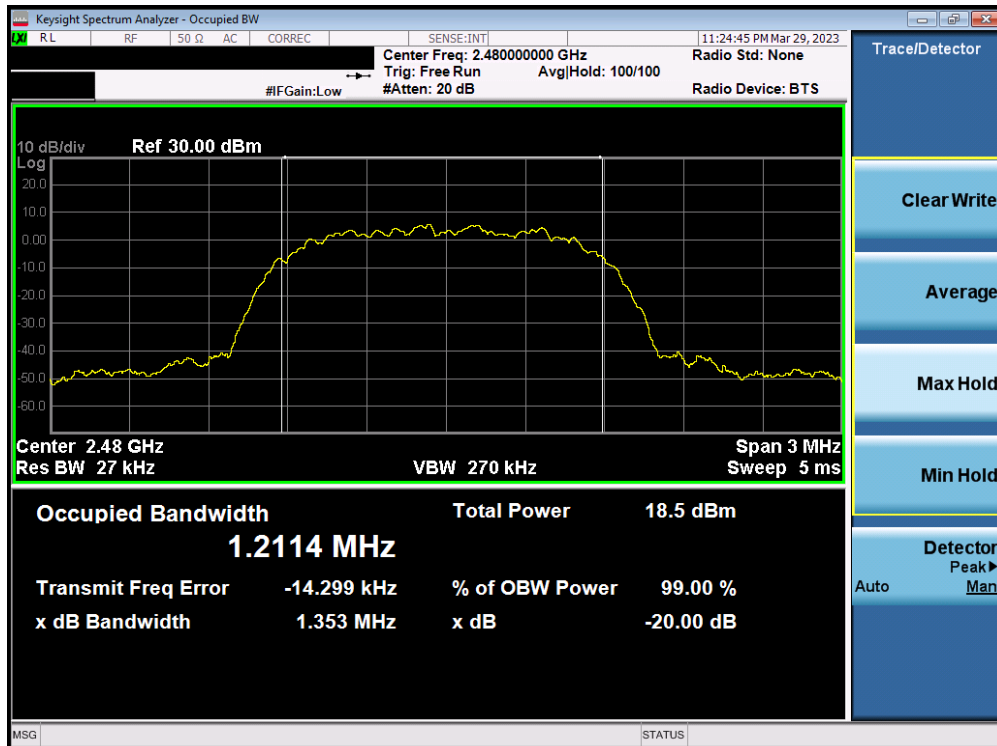

Plot 7-12. 20dB BW and 99% OBW Plot Ant2 (Bluetooth, 8DPSK, ePA – Ch.78)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 23 of 108

NB UNII_L


Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Channel No.	Measured 99% Occupied Bandwidth [kHz]	Measured 20dB Bandwidth [kHz]
2402	1.0	GFSK	iPA	0	878.71	951.30
2441	1.0	GFSK	iPA	39	882.02	952.90
2480	1.0	GFSK	iPA	78	879.36	950.60
2402	3.0	8DPSK	iPA	0	1215.30	1355.00
2441	3.0	8DPSK	iPA	39	1215.30	1354.00
2480	3.0	8DPSK	iPA	78	1215.60	1354.00

Table 7-4. 20dB BW and 99% OBW Bandwidth Measurements NB UNII_L

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 24 of 108

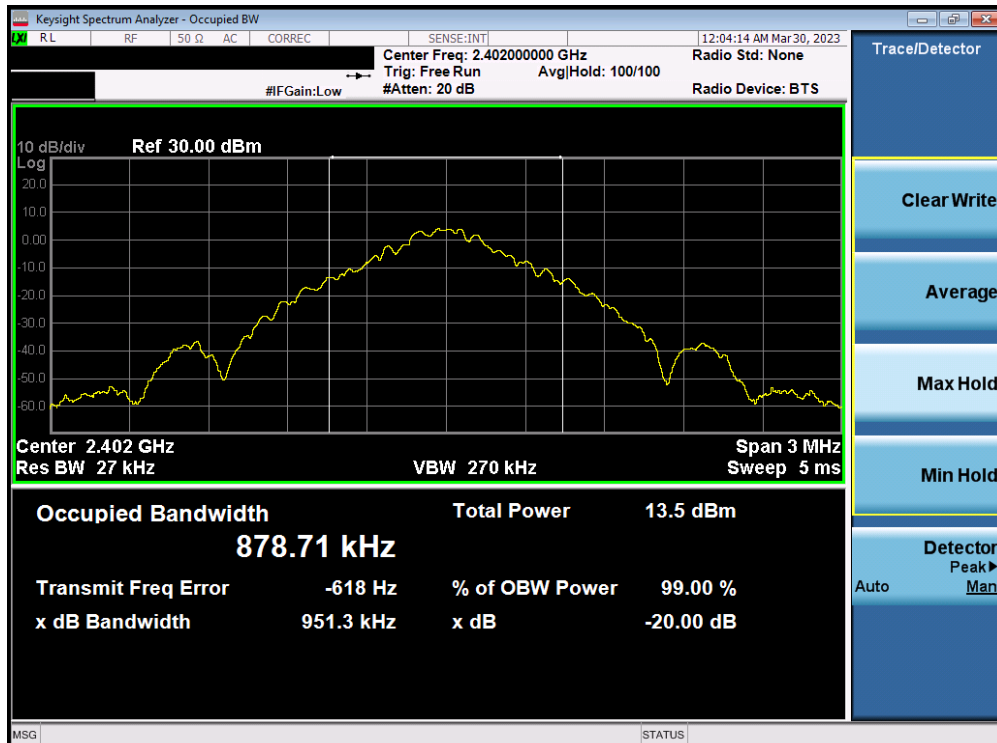


Plot 7-13. 20dB BW and 99% OBW Plot NB UNII_L (Bluetooth, GFSK, iPA – Ch.0)

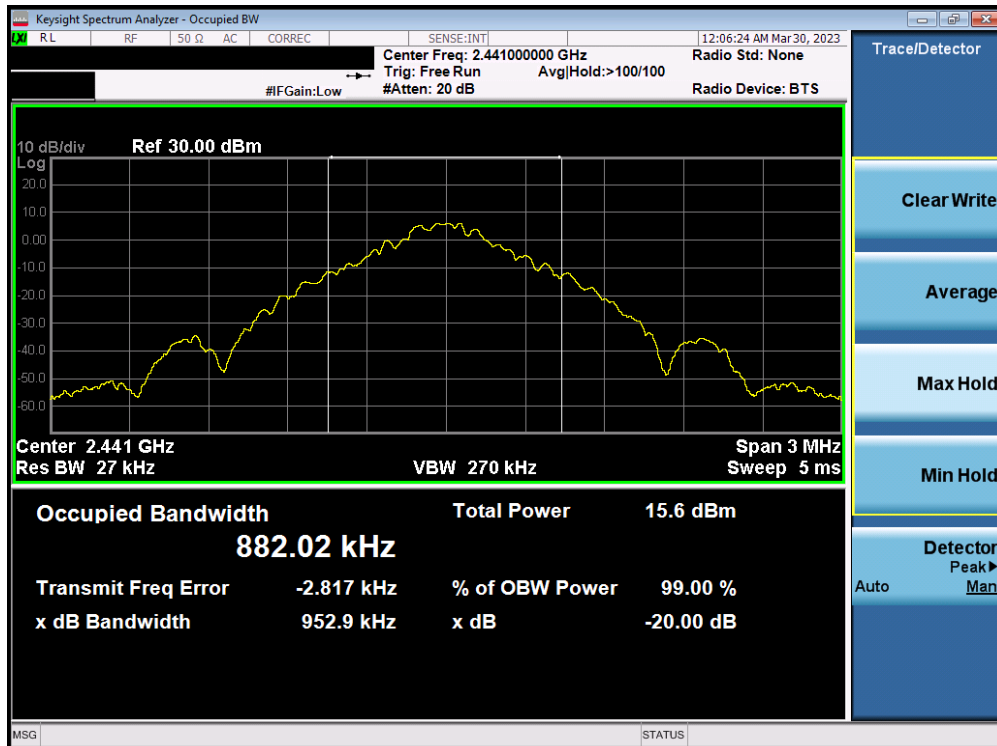


Plot 7-14. 20dB BW and 99% OBW Plot NB UNII_L (Bluetooth, GFSK, iPA – Ch.39)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 25 of 108

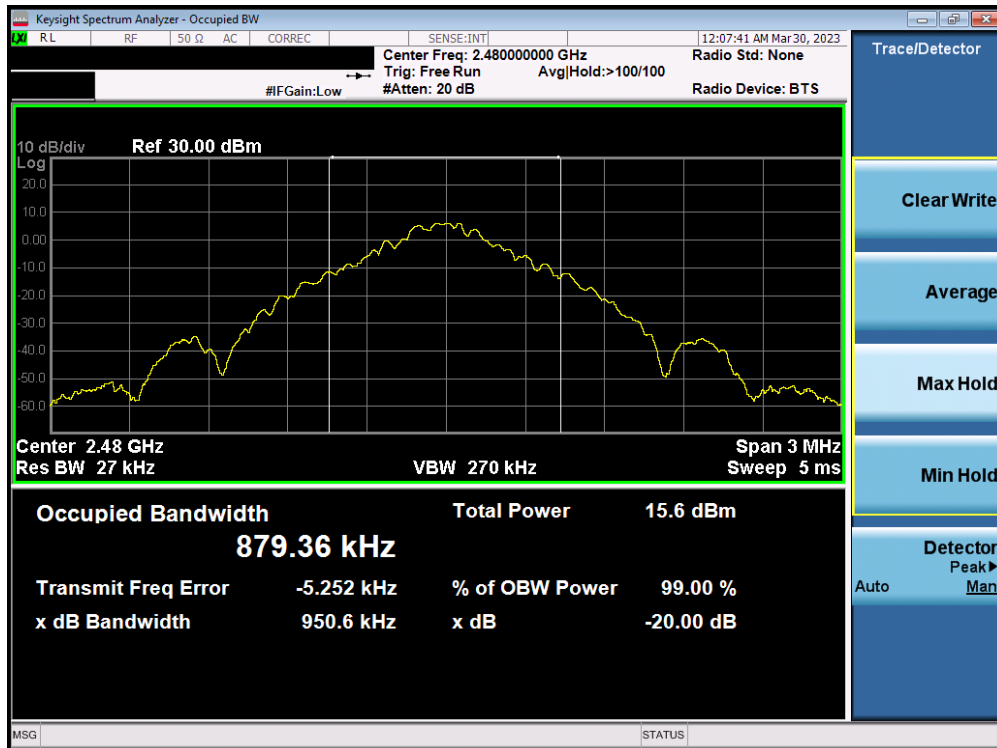


Plot 7-15. 20dB BW and 99% OBW Plot NB UNII_L (Bluetooth, GFSK, iPA – Ch.78)

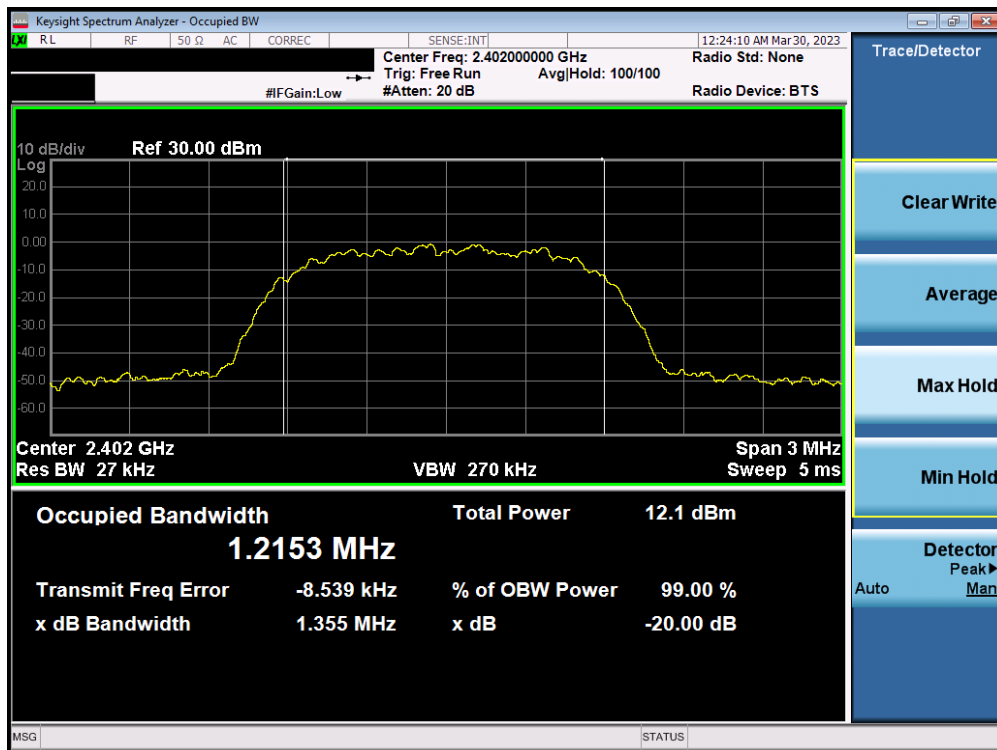


Plot 7-16. 20dB BW and 99% OBW Plot NB UNII_L (Bluetooth, 8DPSK, iPA – Ch.0)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 26 of 108

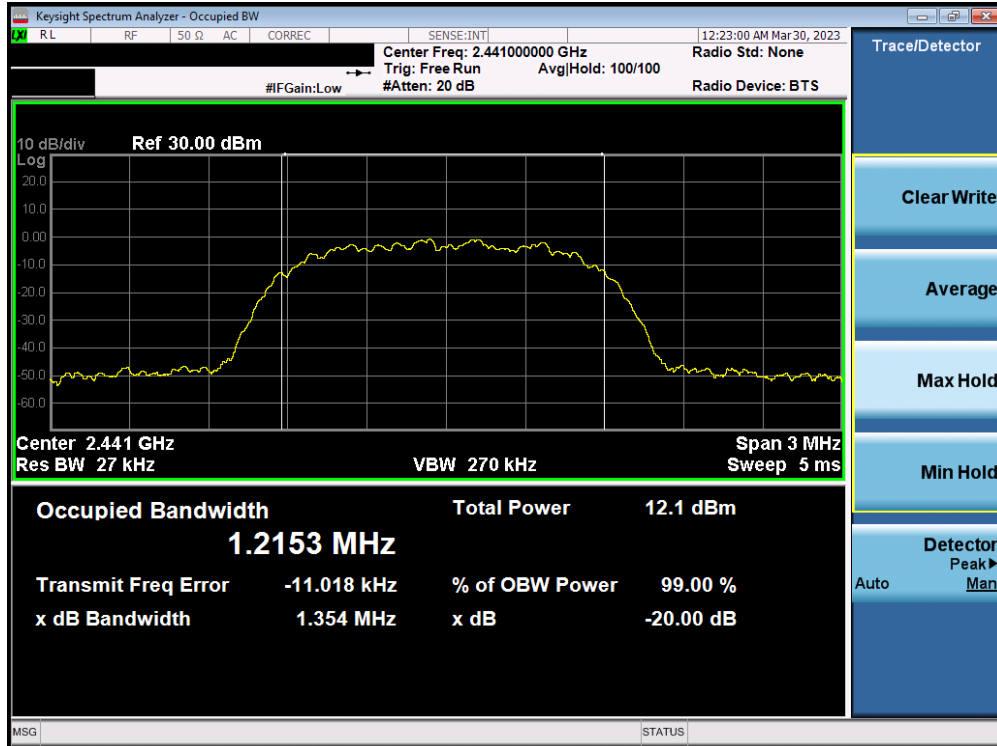

Plot 7-17. 20dB BW and 99% OBW Plot NB UNII_L (Bluetooth, 8DPSK, iPA – Ch.39)

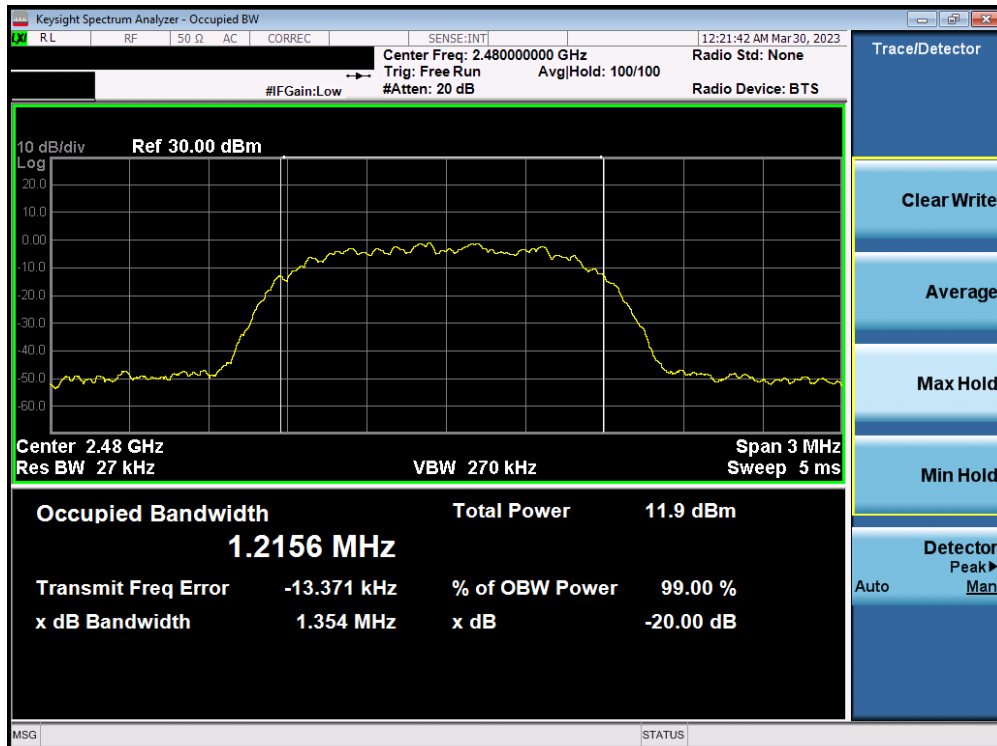

Plot 7-18. 20dB BW and 99% OBW Plot NB UNII_L (Bluetooth, 8DPSK, iPA – Ch.78)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 27 of 108

7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(b)]

Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. Peak and Average power measurements are performed using a broadband power meter with a pulse sensor.

The maximum peak conducted output power of frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels is 1 watt

The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For FHSS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels. The e.i.r.p. shall not exceed 4 W.

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5
 ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement

Note

All supported modulations have been tested and $\pi/4$ -DQPSK was found not as the worst case modulation so only GFSK and 8DPSK is reported.

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 28 of 108

V 10.5 12/15/2021

7.3.1 Peak Output Power Measurement

Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2402	1.0	GFSK	ePA	19.85	96.605	30.00	-10.15	1.60	21.45	36.02	-14.57
2441	1.0	GFSK	ePA	19.79	95.280	30.00	-10.21	1.60	21.39	36.02	-14.63
2480	1.0	GFSK	ePA	20.14	103.276	30.00	-9.86	1.60	21.74	36.02	-14.28
2402	1.0	GFSK	iPA	10.16	10.375	30.00	-19.84	1.60	11.76	36.02	-24.26
2441	1.0	GFSK	iPA	10.32	10.765	30.00	-19.68	1.60	11.92	36.02	-24.10
2480	1.0	GFSK	iPA	10.64	11.588	30.00	-19.36	1.60	12.24	36.02	-23.78
2402	3.0	8DPSK	ePA	16.43	43.954	30.00	-13.57	1.60	18.03	36.02	-17.99
2441	3.0	8DPSK	ePA	16.67	46.452	30.00	-13.33	1.60	18.27	36.02	-17.75
2480	3.0	8DPSK	ePA	16.51	44.771	30.00	-13.49	1.60	18.11	36.02	-17.91
2402	3.0	8DPSK	iPA	9.29	8.492	30.00	-20.71	1.60	10.89	36.02	-25.13
2441	3.0	8DPSK	iPA	9.42	8.750	30.00	-20.58	1.60	11.02	36.02	-25.00
2480	3.0	8DPSK	iPA	9.29	8.492	30.00	-20.71	1.60	10.89	36.02	-25.13

Table 7-5. Peak Conducted Output Power Measurements Ant1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2402	1.0	GFSK	ePA	20.28	106.660	30.00	-9.72	-1.00	19.28	36.02	-16.74
2441	1.0	GFSK	ePA	20.24	105.682	30.00	-9.76	-1.00	19.24	36.02	-16.78
2480	1.0	GFSK	ePA	20.03	100.693	30.00	-9.97	-1.00	19.03	36.02	-16.99
2402	1.0	GFSK	iPA	10.41	10.990	30.00	-19.59	-1.00	9.41	36.02	-26.61
2441	1.0	GFSK	iPA	10.64	11.588	30.00	-19.36	-1.00	9.64	36.02	-26.38
2480	1.0	GFSK	iPA	10.27	10.641	30.00	-19.73	-1.00	9.27	36.02	-26.75
2402	3.0	8DPSK	ePA	16.51	44.771	30.00	-13.49	-1.00	15.51	36.02	-20.51
2441	3.0	8DPSK	ePA	16.48	44.463	30.00	-13.52	-1.00	15.48	36.02	-20.54
2480	3.0	8DPSK	ePA	16.68	46.559	30.00	-13.32	-1.00	15.68	36.02	-20.34
2402	3.0	8DPSK	iPA	9.08	8.091	30.00	-20.92	-1.00	8.08	36.02	-27.94
2441	3.0	8DPSK	iPA	9.33	8.570	30.00	-20.67	-1.00	8.33	36.02	-27.69
2480	3.0	8DPSK	iPA	9.27	8.453	30.00	-20.73	-1.00	8.27	36.02	-27.75

Table 7-6. Peak Conducted Output Power Measurements Ant2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2402	1.0	GFSK	iPA	10.57	11.402	30.00	-19.43	-3.70	6.87	36.02	-29.15
2441	1.0	GFSK	iPA	10.27	10.641	30.00	-19.73	-3.70	6.57	36.02	-29.45
2480	1.0	GFSK	iPA	10.39	10.940	30.00	-19.61	-3.70	6.69	36.02	-29.33
2402	3.0	8DPSK	iPA	9.28	8.472	30.00	-20.72	-3.70	5.58	36.02	-30.44
2441	3.0	8DPSK	iPA	9.27	8.453	30.00	-20.73	-3.70	5.57	36.02	-30.45
2480	3.0	8DPSK	iPA	9.23	8.375	30.00	-20.77	-3.70	5.53	36.02	-30.49

Table 7-7. Peak Conducted Output Power Measurements NB UNII_L

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device		Page 29 of 108



Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Peak Conducted Power						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				Ant1		Ant2		Summed							
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]						
2402	1.0	GFSK	ePA	17.09	51.168	17.01	50.234	20.06	101.391	30.00	-9.94	3.41	23.47	36.02	-12.55
2441	1.0	GFSK	ePA	17.12	51.523	17.10	51.286	20.12	102.802	30.00	-9.88	3.41	23.53	36.02	-12.49
2480	1.0	GFSK	ePA	16.88	48.753	17.12	51.523	20.01	100.231	30.00	-9.99	3.41	23.42	36.02	-12.60
2402	1.0	GFSK	iPA	10.64	11.588	10.50	11.220	13.58	22.803	30.00	-16.42	3.41	16.99	36.02	-19.03
2441	1.0	GFSK	iPA	10.27	10.641	10.19	10.447	13.24	21.086	30.00	-16.76	3.41	16.65	36.02	-19.37
2480	1.0	GFSK	iPA	10.61	11.508	10.52	11.272	13.58	22.803	30.00	-16.42	3.41	16.99	36.02	-19.03
2402	3.0	8DPSK	ePA	16.47	44.361	16.41	43.752	19.45	88.105	30.00	-10.55	3.41	22.86	36.02	-13.16
2441	3.0	8DPSK	ePA	16.48	44.463	16.52	44.875	19.51	89.331	30.00	-10.49	3.41	22.92	36.02	-13.10
2480	3.0	8DPSK	ePA	16.64	46.132	16.74	47.206	19.70	93.325	30.00	-10.30	3.41	23.11	36.02	-12.91
2402	3.0	8DPSK	iPA	9.25	8.414	9.29	8.492	12.28	16.904	30.00	-17.72	3.41	15.69	36.02	-20.33
2441	3.0	8DPSK	iPA	9.36	8.630	9.18	8.279	12.28	16.904	30.00	-17.72	3.41	15.69	36.02	-20.33
2480	3.0	8DPSK	iPA	9.18	8.279	9.25	8.414	12.23	16.711	30.00	-17.77	3.41	15.64	36.02	-20.38

Table 7-8. Peak Conducted Output Power Measurements TxBF

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 30 of 108

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.2 Average Output Power Measurement

Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Avg Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2402	1.0	GFSK	ePA	19.59	90.991	30.00	-10.41	1.60	21.19	36.02	-14.83
2441	1.0	GFSK	ePA	19.54	89.950	30.00	-10.46	1.60	21.14	36.02	-14.88
2480	1.0	GFSK	ePA	19.91	97.949	30.00	-10.09	1.60	21.51	36.02	-14.51
2402	1.0	GFSK	iPA	10.00	10.000	30.00	-20.00	1.60	11.60	36.02	-24.42
2441	1.0	GFSK	iPA	10.15	10.351	30.00	-19.85	1.60	11.75	36.02	-24.27
2480	1.0	GFSK	iPA	10.46	11.117	30.00	-19.54	1.60	12.06	36.02	-23.96
2402	3.0	8DPSK	ePA	13.11	20.464	30.00	-16.89	1.60	14.71	36.02	-21.31
2441	3.0	8DPSK	ePA	13.38	21.777	30.00	-16.62	1.60	14.98	36.02	-21.04
2480	3.0	8DPSK	ePA	13.25	21.135	30.00	-16.75	1.60	14.85	36.02	-21.17
2402	3.0	8DPSK	iPA	6.23	4.198	30.00	-23.77	1.60	7.83	36.02	-28.19
2441	3.0	8DPSK	iPA	6.38	4.345	30.00	-23.62	1.60	7.98	36.02	-28.04
2480	3.0	8DPSK	iPA	6.27	4.236	30.00	-23.73	1.60	7.87	36.02	-28.15

Table 7-9. Average Conducted Output Power Measurements Ant1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Avg Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2402	1.0	GFSK	ePA	20.00	100.000	30.00	-10.00	-1.00	19.00	36.02	-17.02
2441	1.0	GFSK	ePA	19.96	99.083	30.00	-10.04	-1.00	18.96	36.02	-17.06
2480	1.0	GFSK	ePA	19.74	94.189	30.00	-10.26	-1.00	18.74	36.02	-17.28
2402	1.0	GFSK	iPA	10.23	10.544	30.00	-19.77	-1.00	9.23	36.02	-26.79
2441	1.0	GFSK	iPA	10.46	11.117	30.00	-19.54	-1.00	9.46	36.02	-26.56
2480	1.0	GFSK	iPA	10.09	10.209	30.00	-19.91	-1.00	9.09	36.02	-26.93
2402	3.0	8DPSK	ePA	13.20	20.893	30.00	-16.80	-1.00	12.20	36.02	-23.82
2441	3.0	8DPSK	ePA	13.18	20.797	30.00	-16.82	-1.00	12.18	36.02	-23.84
2480	3.0	8DPSK	ePA	13.36	21.677	30.00	-16.64	-1.00	12.36	36.02	-23.66
2402	3.0	8DPSK	iPA	6.02	3.999	30.00	-23.98	-1.00	5.02	36.02	-31.00
2441	3.0	8DPSK	iPA	6.29	4.256	30.00	-23.71	-1.00	5.29	36.02	-30.73
2480	3.0	8DPSK	iPA	6.24	4.207	30.00	-23.76	-1.00	5.24	36.02	-30.78

Table 7-10. Average Conducted Output Power Measurements Ant2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Avg Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2402	1.0	GFSK	iPA	10.39	10.940	30.00	-19.61	-3.70	6.69	36.02	-29.33
2441	1.0	GFSK	iPA	10.08	10.186	30.00	-19.92	-3.70	6.38	36.02	-29.64
2480	1.0	GFSK	iPA	10.21	10.495	30.00	-19.79	-3.70	6.51	36.02	-29.51
2402	3.0	8DPSK	iPA	6.21	4.178	30.00	-23.79	-3.70	2.51	36.02	-33.51
2441	3.0	8DPSK	iPA	6.23	4.198	30.00	-23.77	-3.70	2.53	36.02	-33.49
2480	3.0	8DPSK	iPA	6.20	4.169	30.00	-23.80	-3.70	2.50	36.02	-33.52

Table 7-11. Average Conducted Output Power Measurements NB UNII_L

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 31 of 108



Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Average Conducted Power						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				Ant1		Ant2		Summed							
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]						
2402	1.0	GFSK	ePA	16.79	47.753	16.70	46.774	19.76	94.624	30.00	-10.24	3.41	23.17	36.02	-12.85
2441	1.0	GFSK	ePA	16.84	48.306	16.77	47.534	19.82	95.940	30.00	-10.18	3.41	23.23	36.02	-12.79
2480	1.0	GFSK	ePA	16.63	46.026	16.81	47.973	19.73	93.972	30.00	-10.27	3.41	23.14	36.02	-12.88
2402	1.0	GFSK	iPA	10.46	11.117	10.32	10.765	13.40	21.878	30.00	-16.60	3.41	16.81	36.02	-19.21
2441	1.0	GFSK	iPA	10.09	10.209	10.00	10.000	13.06	20.230	30.00	-16.94	3.41	16.47	36.02	-19.55
2480	1.0	GFSK	iPA	10.43	11.041	10.33	10.789	13.39	21.827	30.00	-16.61	3.41	16.80	36.02	-19.22
2402	3.0	8DPSK	ePA	13.14	20.606	13.08	20.324	16.12	40.926	30.00	-13.88	3.41	19.53	36.02	-16.49
2441	3.0	8DPSK	ePA	13.19	20.845	13.20	20.893	16.21	41.783	30.00	-13.79	3.41	19.62	36.02	-16.40
2480	3.0	8DPSK	ePA	13.37	21.727	13.43	22.029	16.41	43.752	30.00	-13.59	3.41	19.82	36.02	-16.20
2402	3.0	8DPSK	iPA	6.20	4.169	6.22	4.188	9.22	8.356	30.00	-20.78	3.41	12.63	36.02	-23.39
2441	3.0	8DPSK	iPA	6.33	4.295	6.03	4.009	9.19	8.299	30.00	-20.81	3.41	12.60	36.02	-23.42
2480	3.0	8DPSK	iPA	6.17	4.140	6.16	4.130	9.18	8.279	30.00	-20.82	3.41	12.59	36.02	-23.43

Table 7-12. Average Conducted Output Power Measurements TxBF

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 32 of 108

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology Morgan Hill. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample TxBF Calculation:

At 2402MHz, the average conducted output power was measured to be 16.79 dBm for Antenna 1 and 16.70 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{TxBF}$$

$$(16.79 \text{ dBm} + 16.70 \text{ dBm}) = (47.753 \text{ mW} + 46.774 \text{ mW}) = 94.527 \text{ mW} = 19.76 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 2402MHz, the average conducted output power was calculated to be 19.76 dBm with directional gain of 3.41 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$19.76 \text{ dBm} + 3.41 \text{ dBi} = 23.17 \text{ dBm}$$

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 33 of 108

V 10.5 12/15/2021

7.4 Conducted Authorized Band Edge

§15.247 (d); RSS-247 [5.5]

Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. **The maximum permissible out-of-band emission level is 20 dBc.**

Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

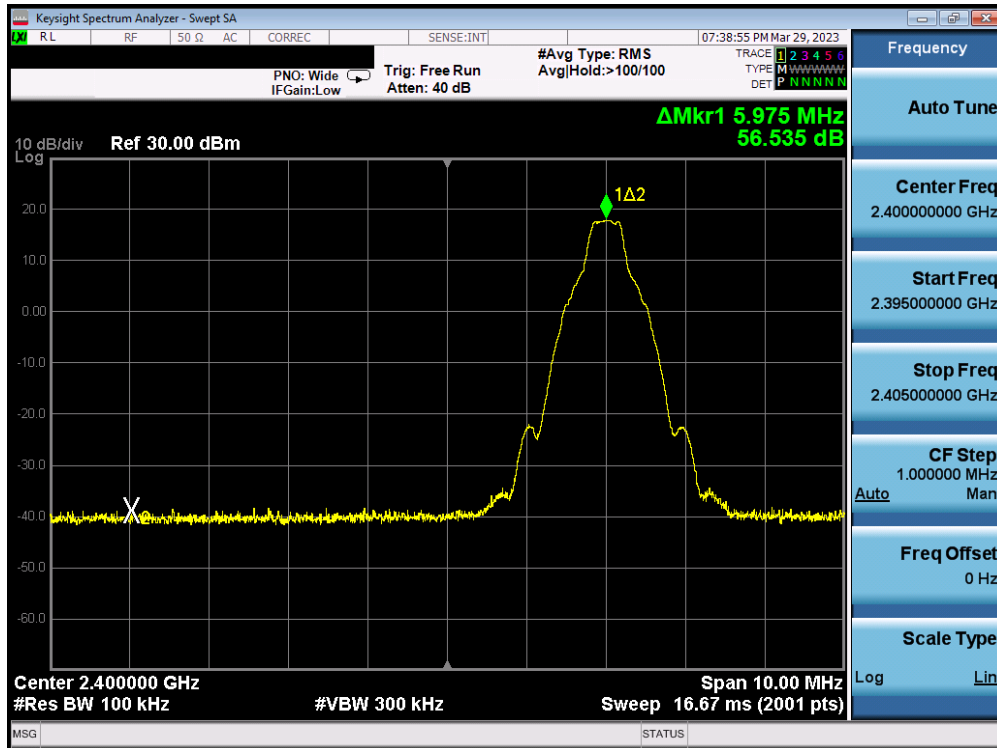


Figure 7-3. Test Instrument & Measurement Setup


Test Notes

1. Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 34 of 108




Plot 7-19. Band Edge Plot Ant1 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch.0)

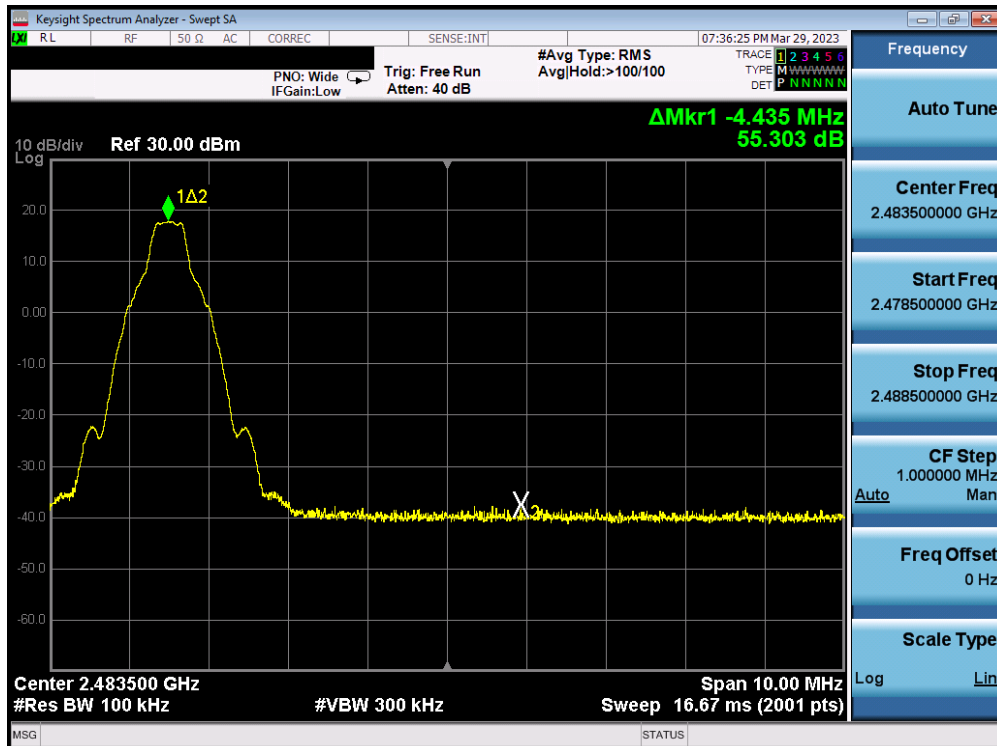


Plot 7-20. Band Edge Plot Ant1 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch.78)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 35 of 108

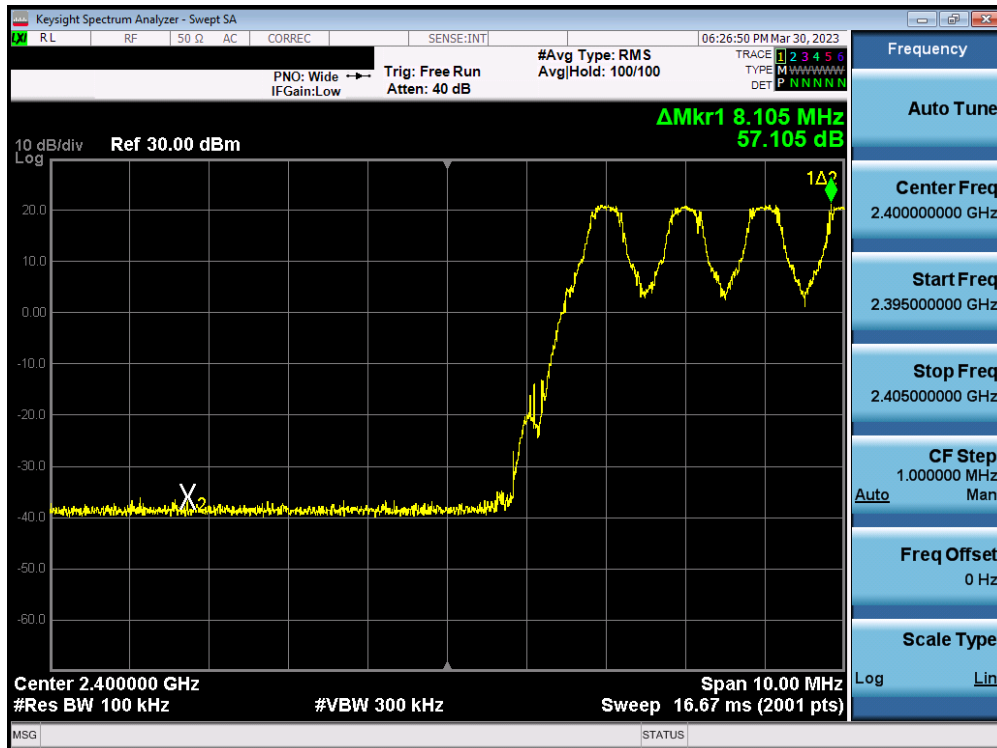


Plot 7-21. Band Edge Plot Ant1 (Bluetooth with Hopping Enabled, GFSK, ePA, 2.4GHz)

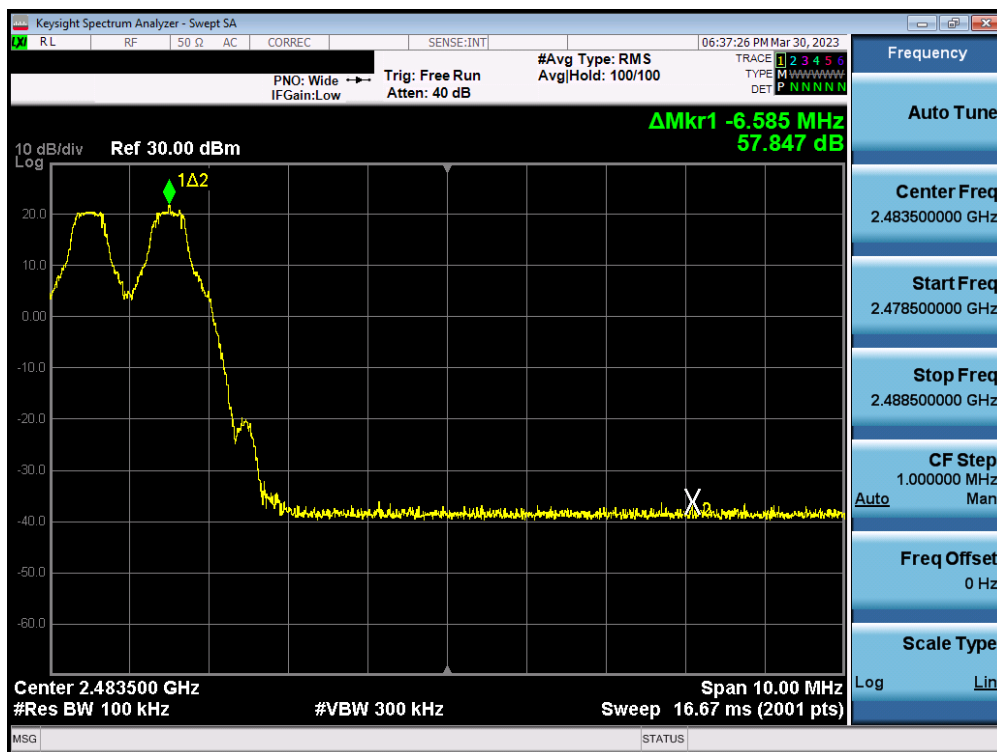


Plot 7-22. Band Edge Plot Ant1 (Bluetooth with Hopping Enabled, GFSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 36 of 108

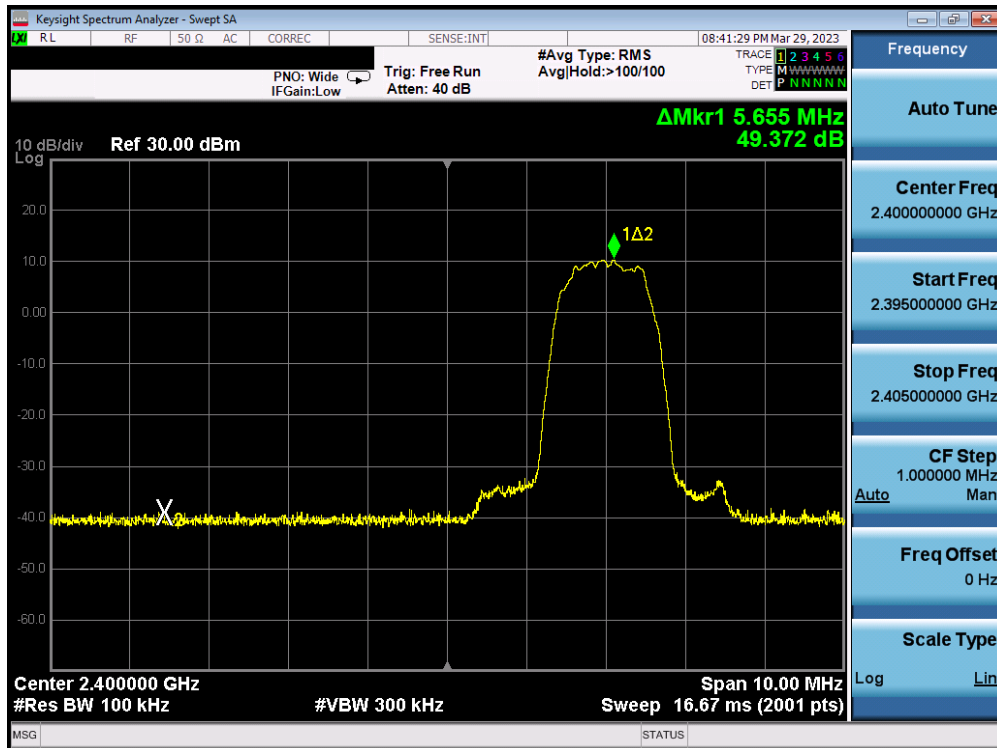


Plot 7-23. Band Edge Plot Ant1 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch.0)

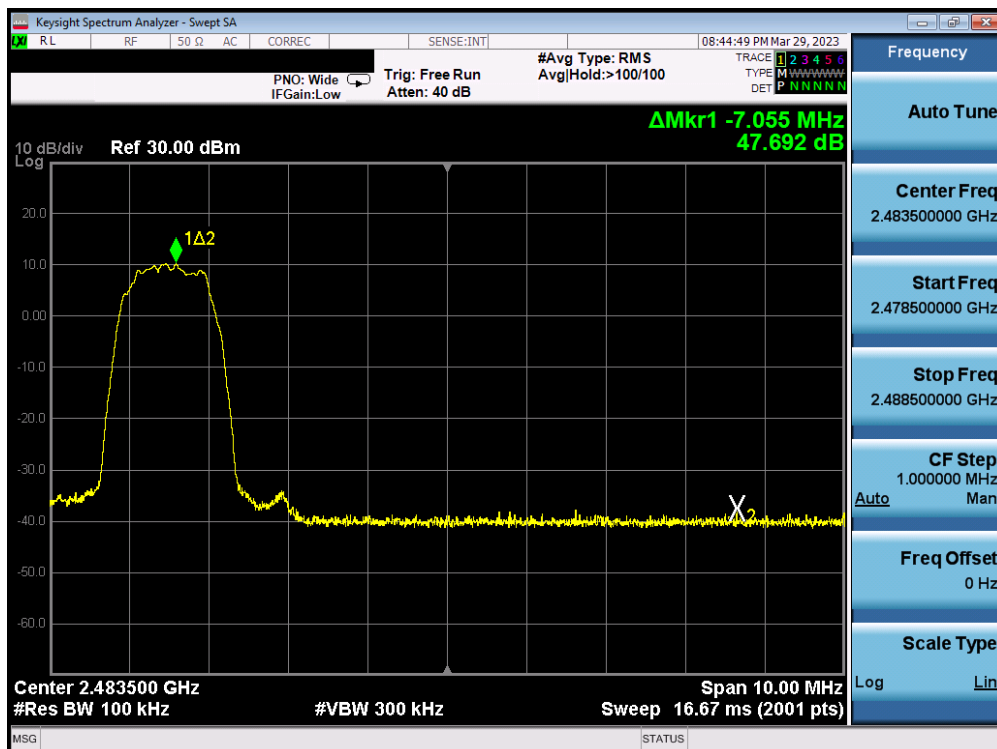


Plot 7-24. Band Edge Plot Ant1 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch.78)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 37 of 108

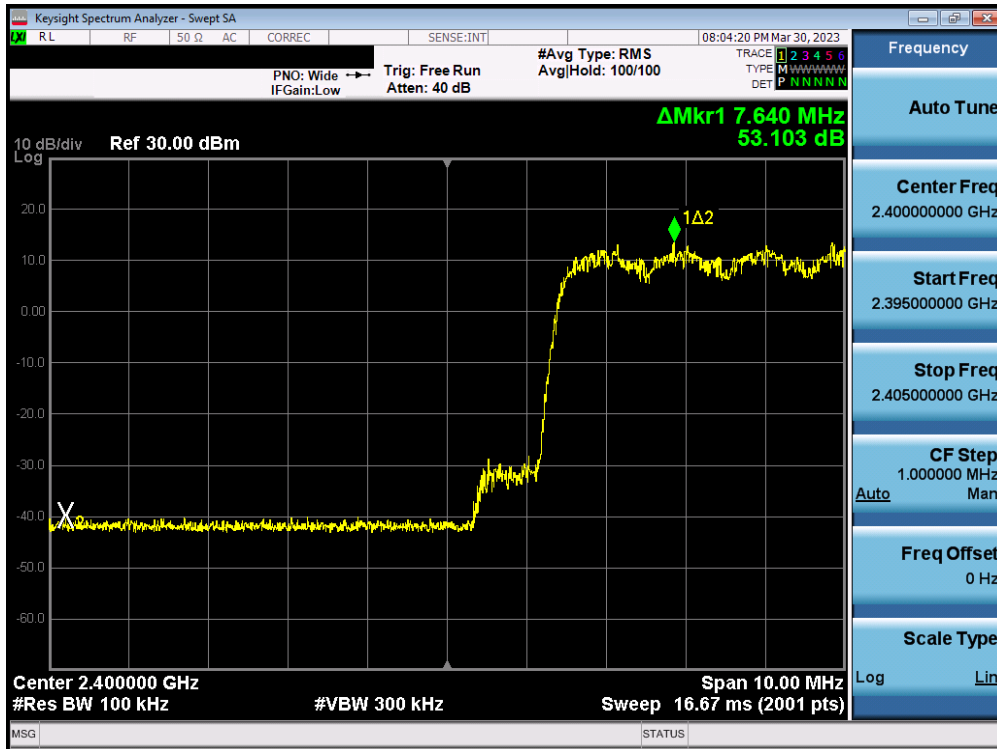


Plot 7-25. Band Edge Plot Ant1 (Bluetooth with Hopping Enabled, 8DPSK, ePA, 2.4GHz)

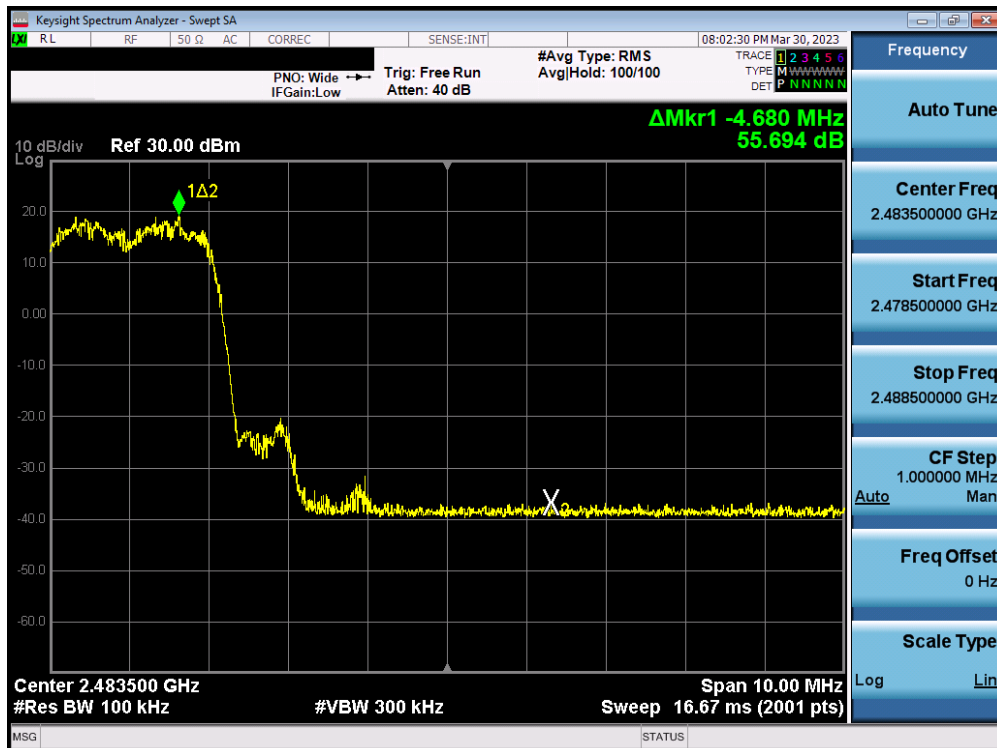


Plot 7-26. Band Edge Plot Ant1 (Bluetooth with Hopping Enabled, 8DPSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 38 of 108

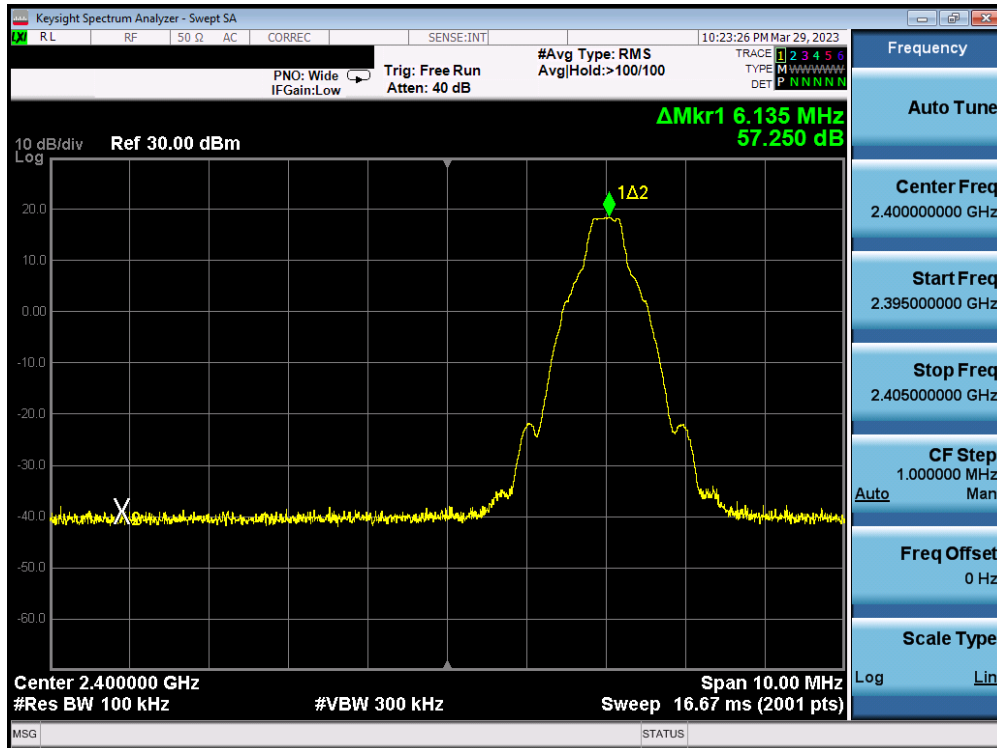


Plot 7-27. Band Edge Plot Ant2 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch.0)

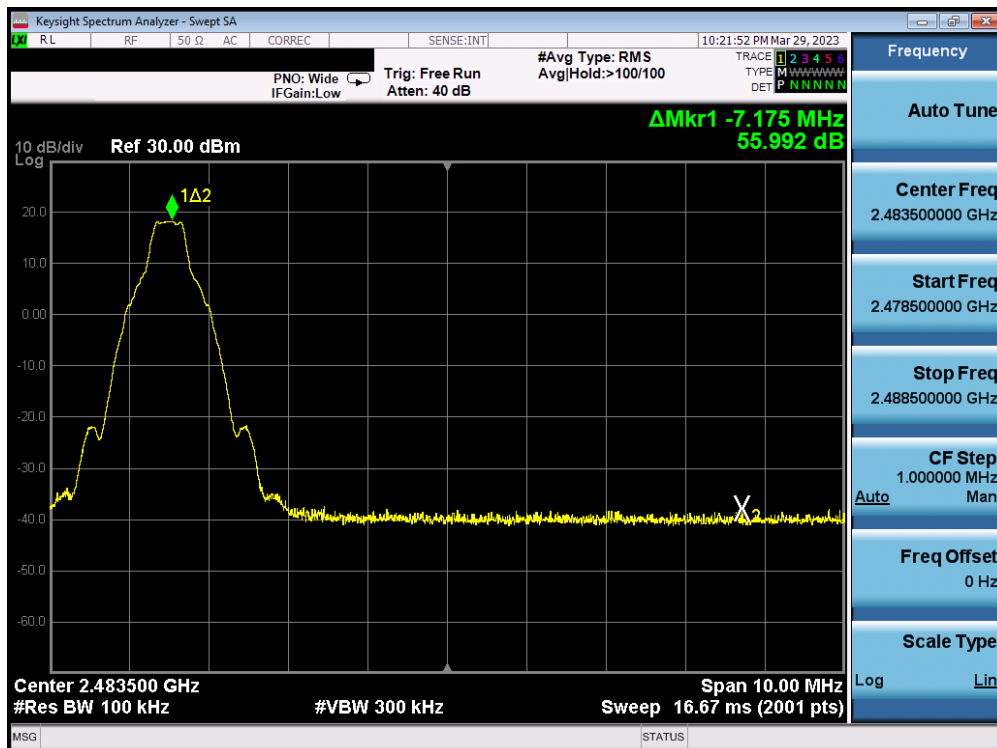


Plot 7-28. Band Edge Plot Ant2 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch.78)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 39 of 108

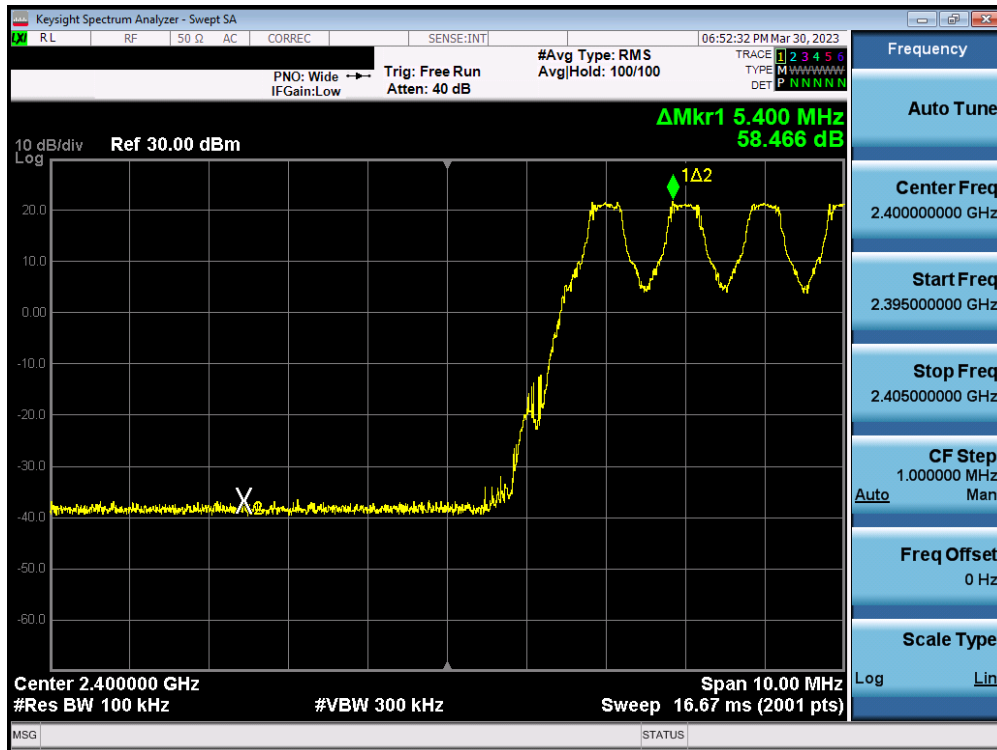


Plot 7-29. Band Edge Plot Ant2 (Bluetooth with Hopping Enabled, GFSK, ePA, 2.4GHz)

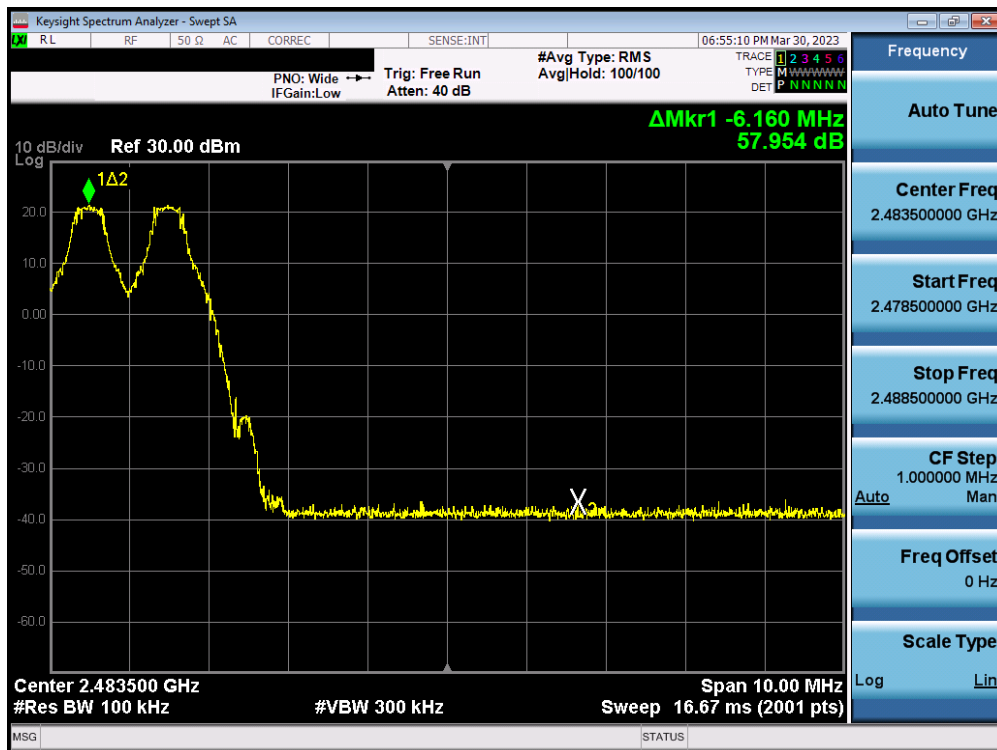


Plot 7-30. Band Edge Plot Ant2 (Bluetooth with Hopping Enabled, GFSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 40 of 108

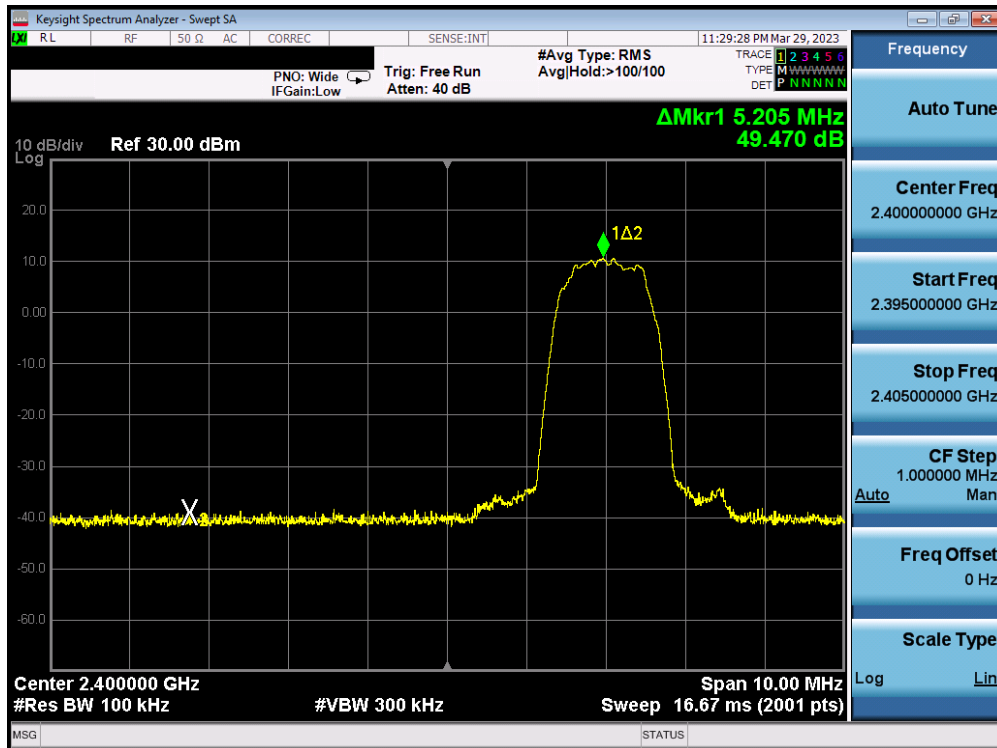

Plot 7-31. Band Edge Plot Ant2 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch.0)

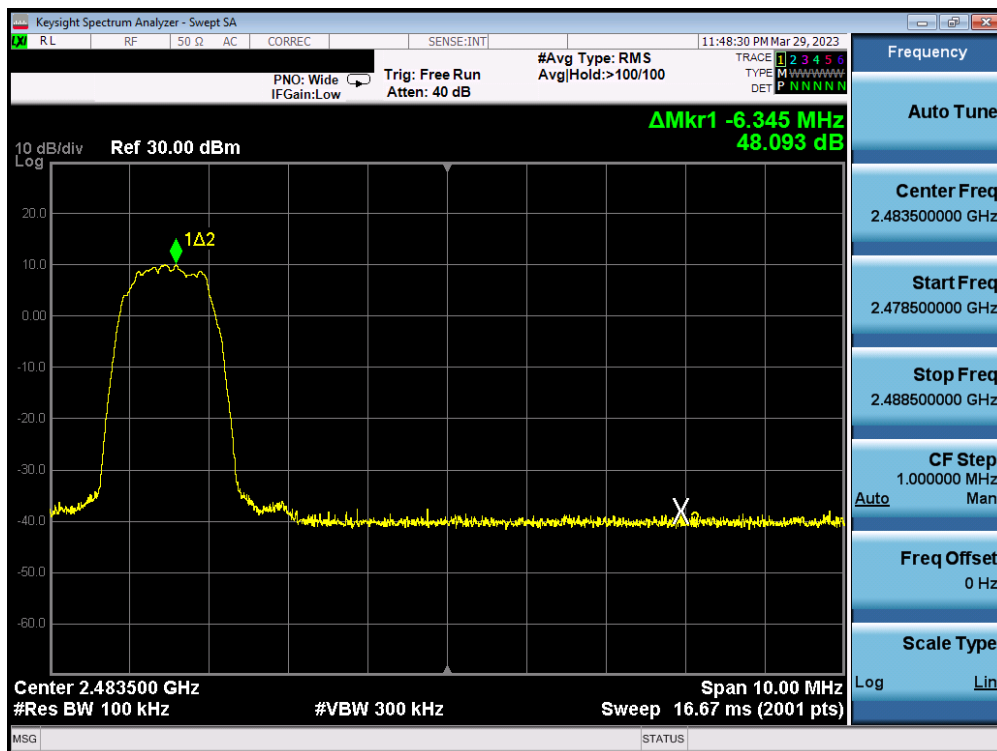


Plot 7-32. Band Edge Plot Ant2 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch.78)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 41 of 108




Plot 7-33. Band Edge Plot Ant2 (Bluetooth with Hopping Enabled, 8DPSK, ePA, 2.4GHz)

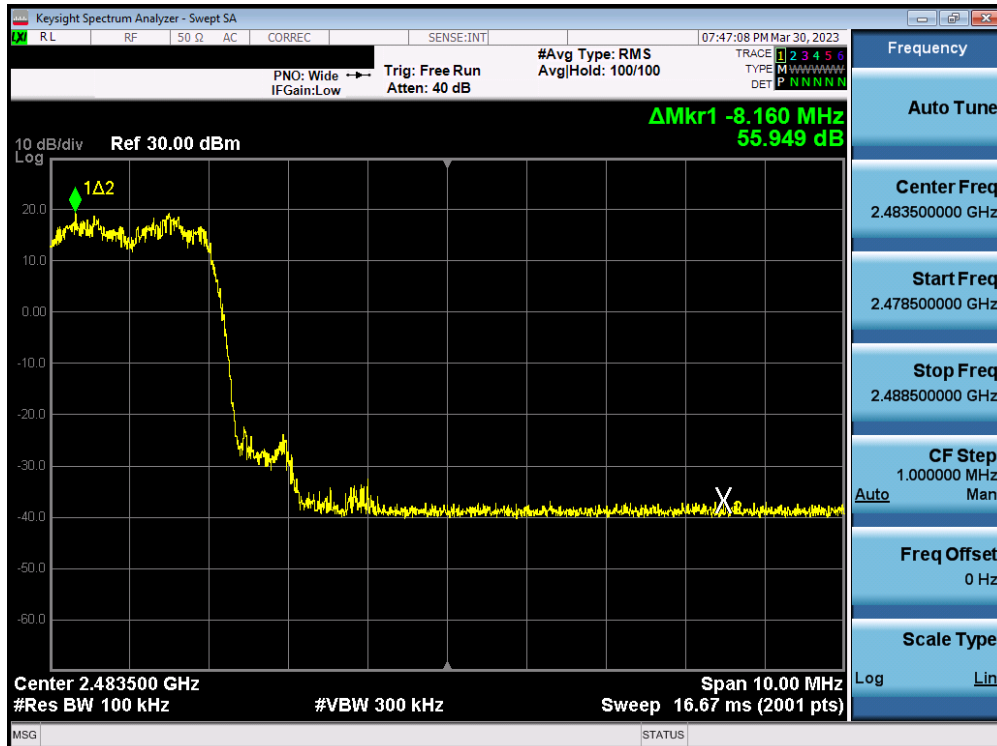


Plot 7-34. Band Edge Plot Ant2 (Bluetooth with Hopping Enabled, 8DPSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 42 of 108

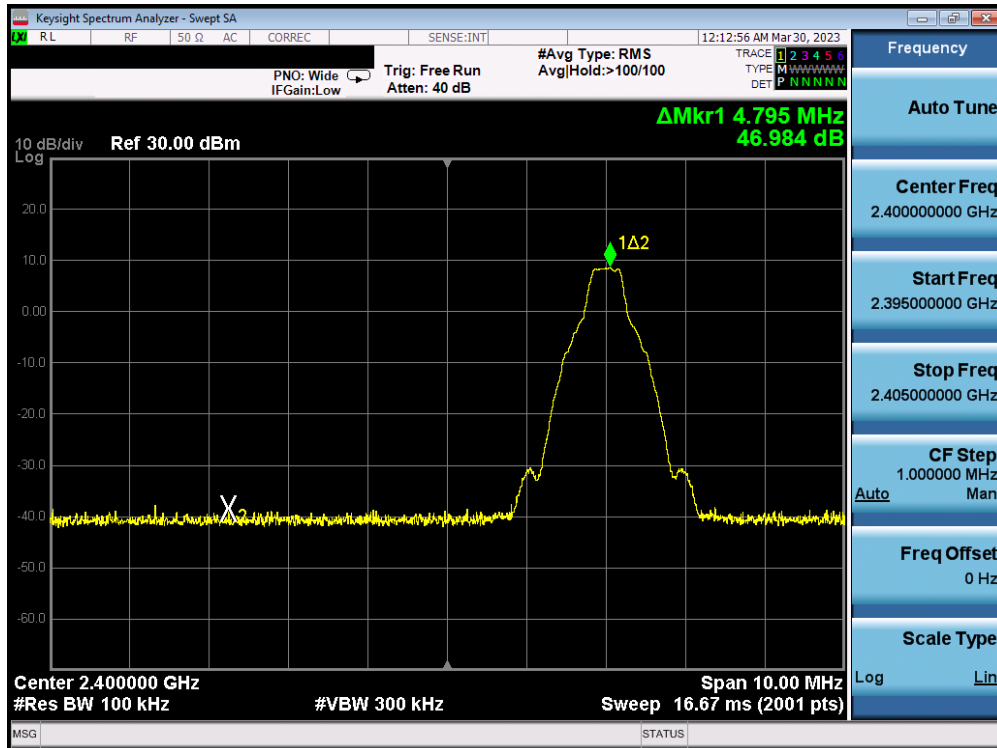


Plot 7-35. Band Edge Plot NB UNII_L (Bluetooth with Hopping Disabled, GFSK, iPA – Ch.0)

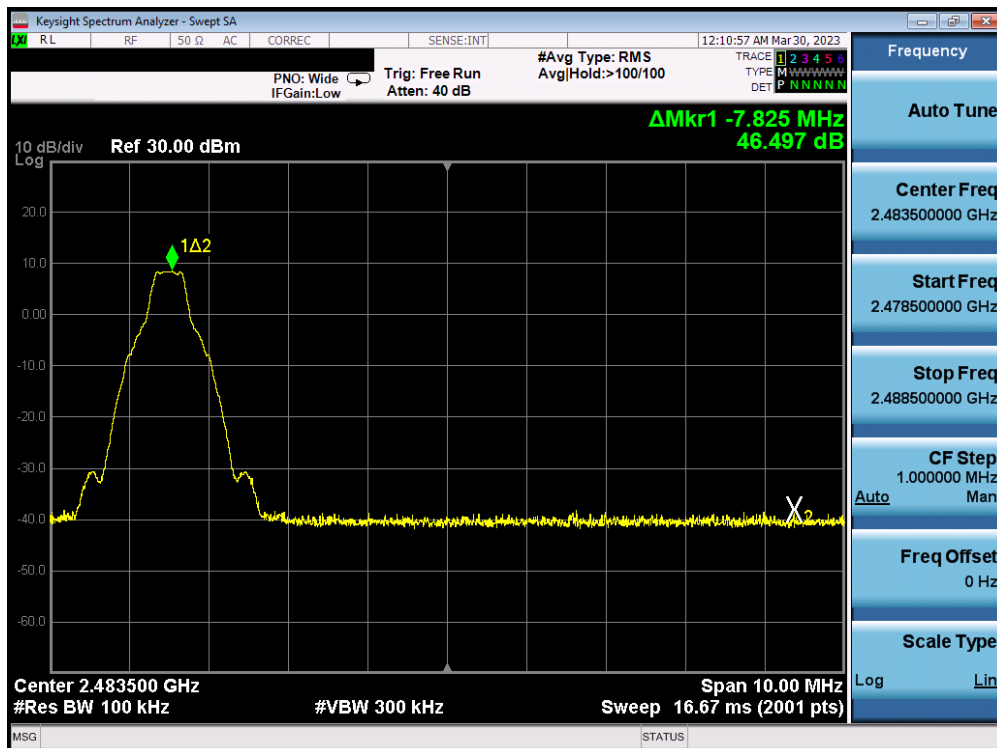


Plot 7-36. Band Edge Plot NB UNII_L (Bluetooth with Hopping Disabled, GFSK, iPA – Ch.78)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 43 of 108

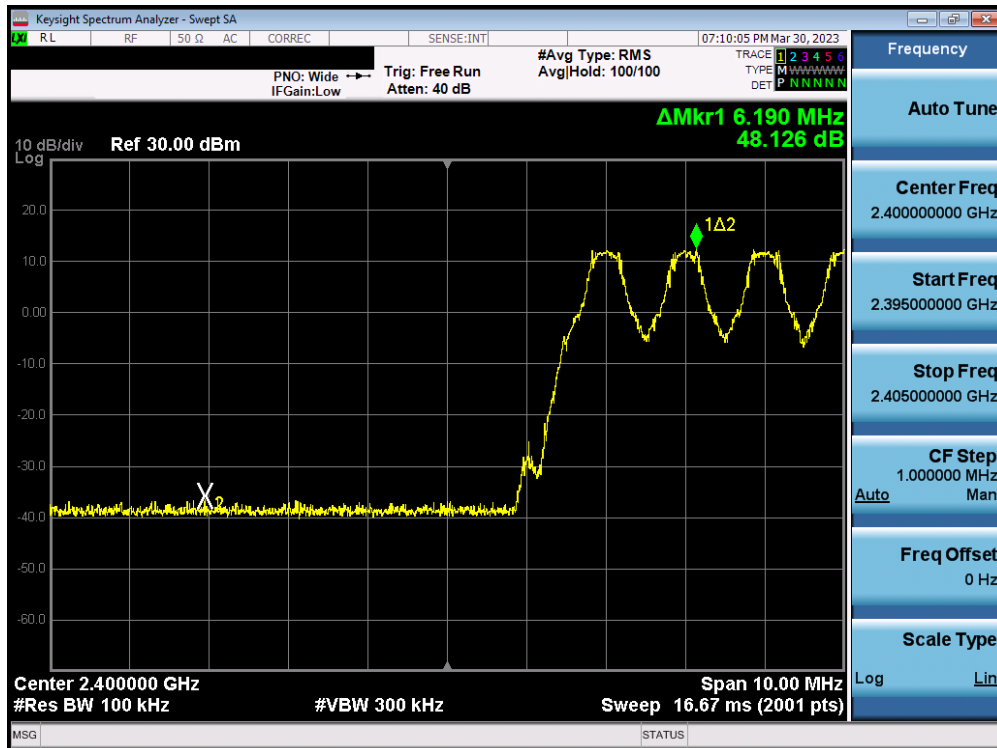


Plot 7-37. Band Edge Plot NB UNII_L (Bluetooth with Hopping Enabled, GFSK, iPA, 2.4GHz)

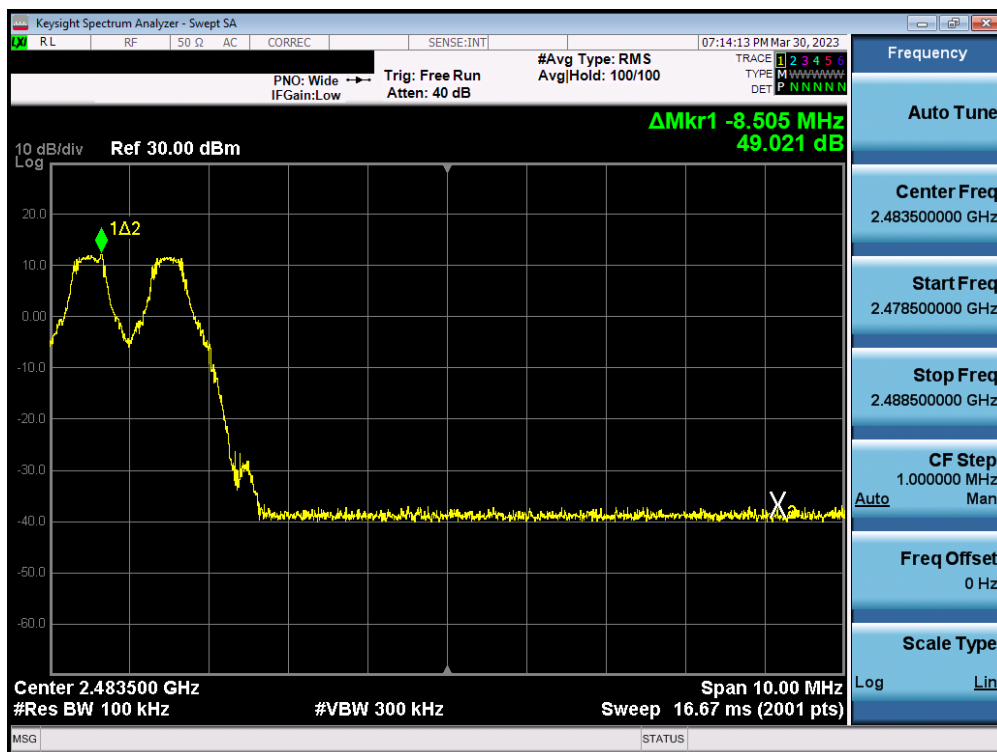


Plot 7-38. Band Edge Plot NB UNII_L (Bluetooth with Hopping Enabled, GFSK, iPA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 44 of 108

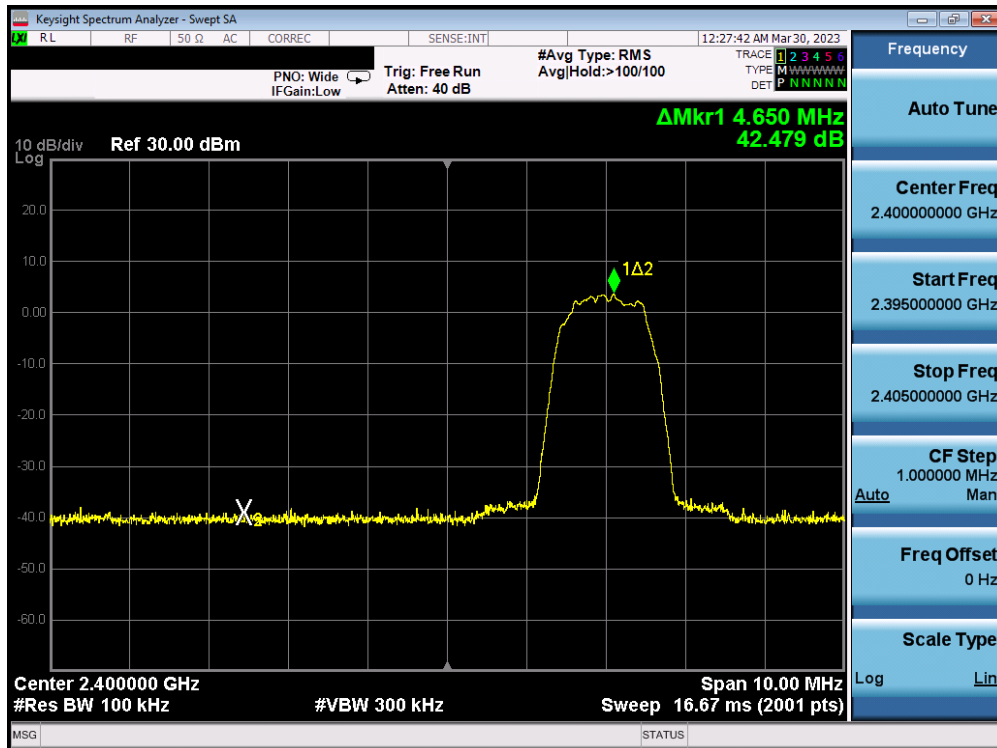


Plot 7-39. Band Edge Plot NB UNII_L (Bluetooth with Hopping Disabled, 8DPSK, iPA – Ch.0)

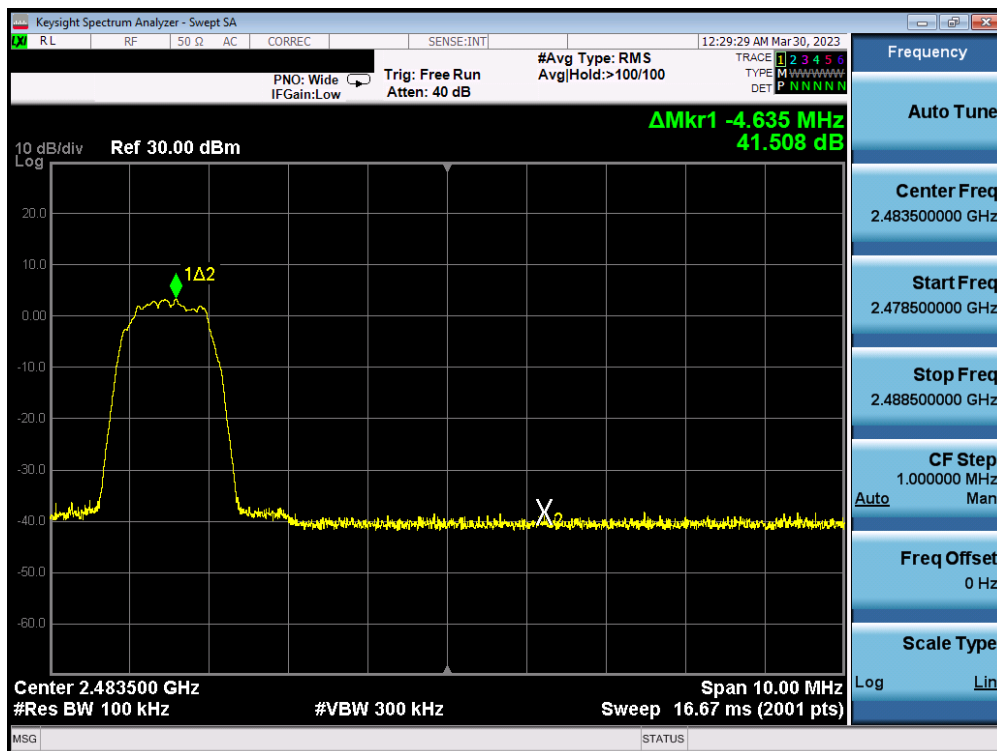


Plot 7-40. Band Edge Plot NB UNII_L (Bluetooth with Hopping Disabled, 8DPSK, iPA – Ch.78)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 45 of 108

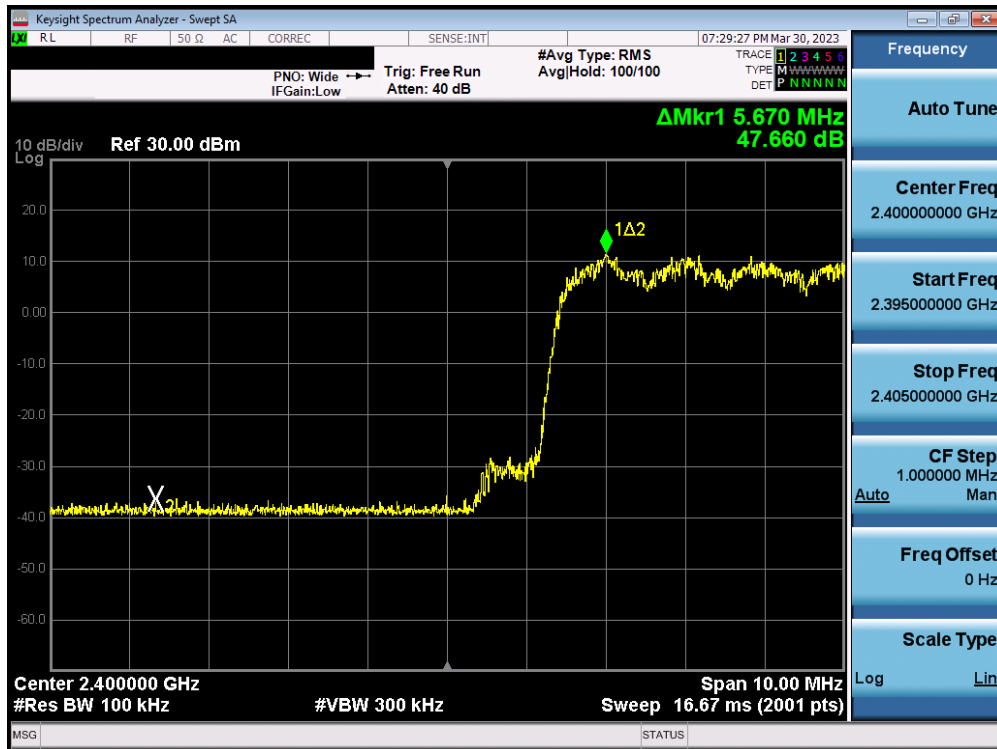

Plot 7-41. Band Edge Plot NB UNII_L (Bluetooth with Hopping Enabled, 8DPSK, iPA, 2.4GHz)

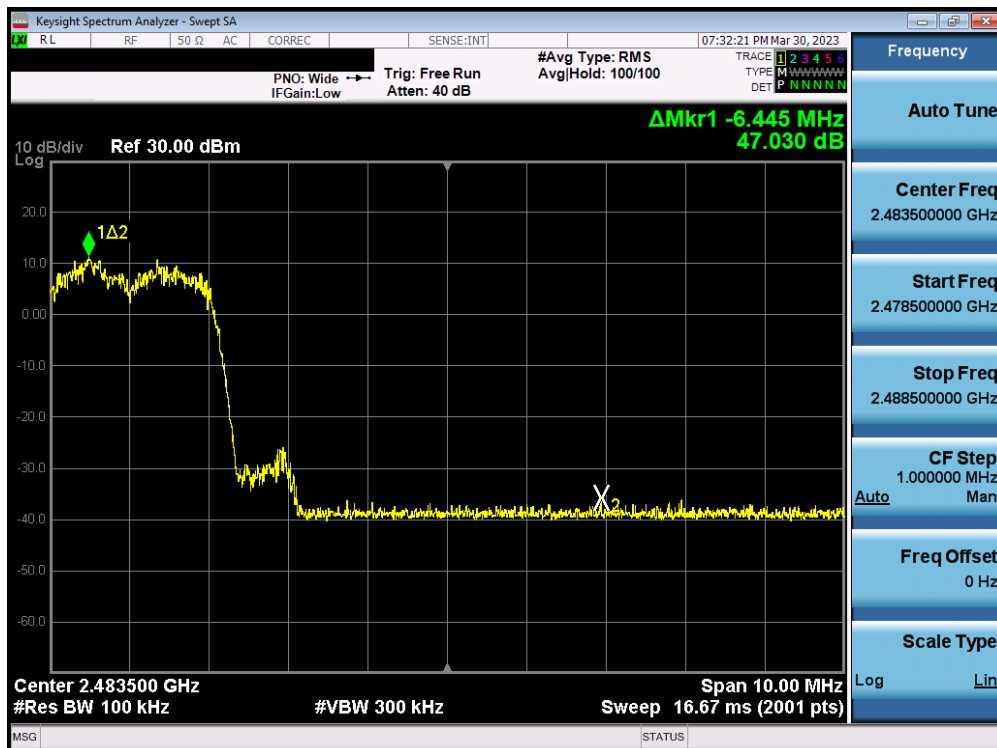

Plot 7-42. Band Edge Plot NB UNII_L (Bluetooth with Hopping Enabled, 8DPSK, iPA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 46 of 108

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(b)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. **The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW \geq RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 47 of 108

V 10.5 12/15/2021

Ant1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Measured Channel Separation [MHz]	Min. Channel Separation [MHz]	Pass / Fail
2441	1.0	GFSK	ePA	1.000	0.63	Pass
2441	3.0	8DPSK	ePA	1.000	0.90	Pass

Table 7-13. Minimum Channel Separation Ant1

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device		Page 48 of 108


Ant2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Measured Channel Separation [MHz]	Min. Channel Separation [MHz]	Pass / Fail
2441	1.0	GFSK	ePA	1.000	0.64	Pass
2441	3.0	8DPSK	ePA	1.000	0.90	Pass


Table 7-14. Minimum Channel Separation Ant2

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 50 of 108

V 10.5 12/15/2021

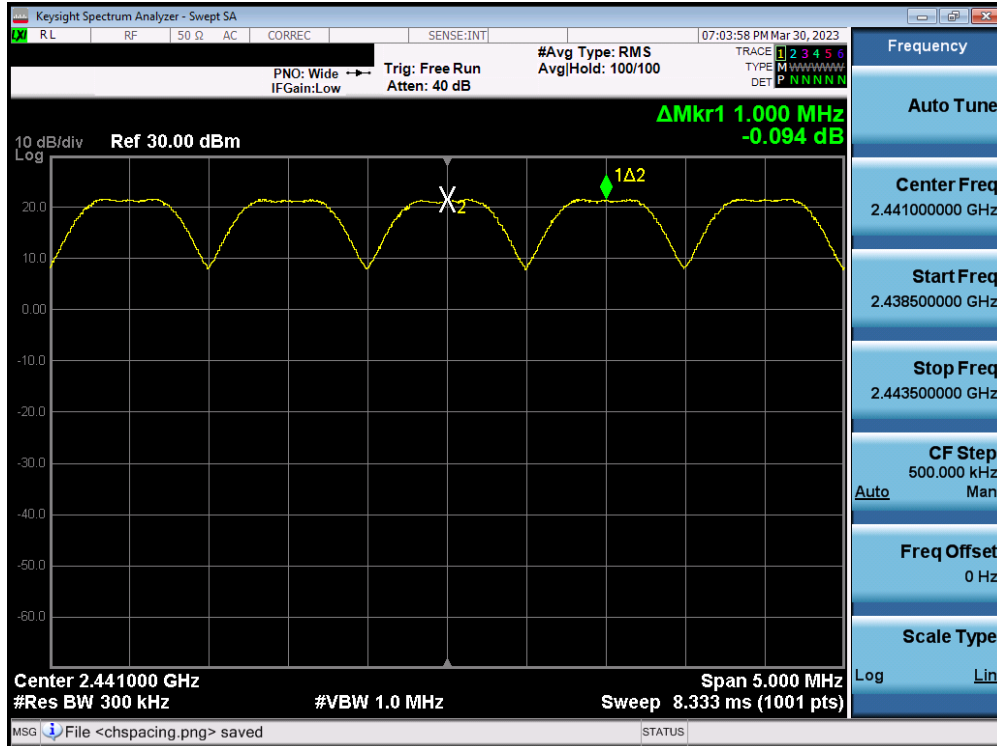

Plot 7-45. Channel Spacing Plot Ant2 (Bluetooth, GFSK, ePA, 2.4GHz)

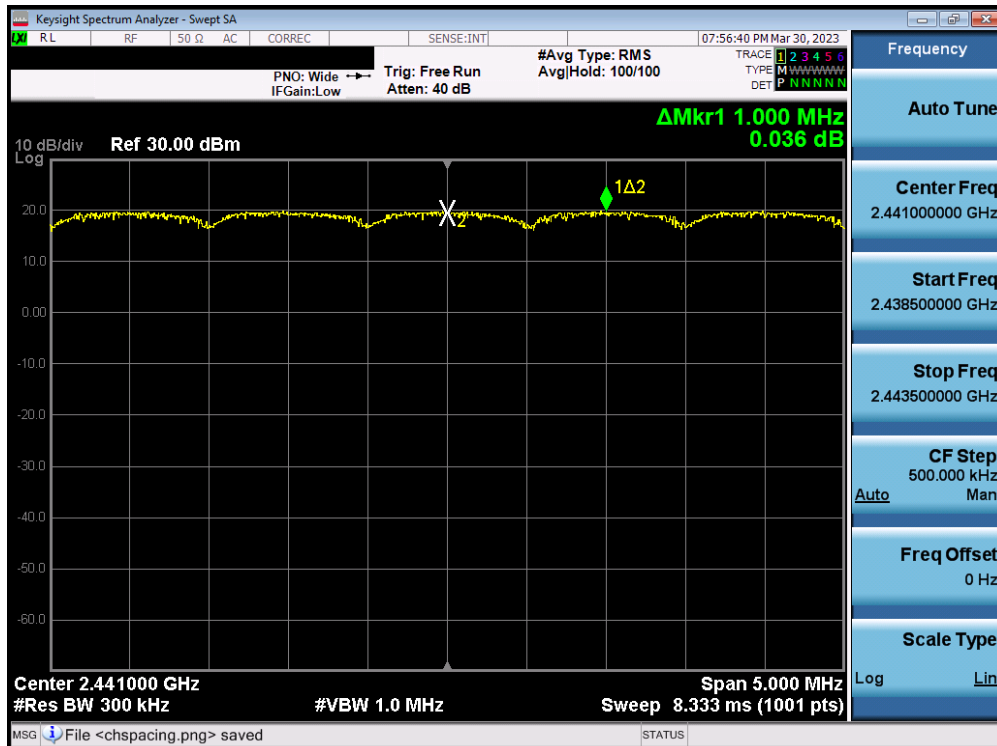

Plot 7-46. Channel Spacing Plot Ant2 (Bluetooth, 8DPSK, ePA, 2.4GHz)


FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 51 of 108

NB UNII_L


Frequency [MHz]	Data Rate [Mbps]	Modulation	Power Scheme	Measured Channel Separation [MHz]	Min. Channel Separation [MHz]	Pass / Fail
2441	1.0	GFSK	iPA	1.000	0.64	Pass
2441	3.0	8DPSK	iPA	1.000	0.90	Pass

Table 7-15. Minimum Channel Separation NB UNII_L

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 52 of 108

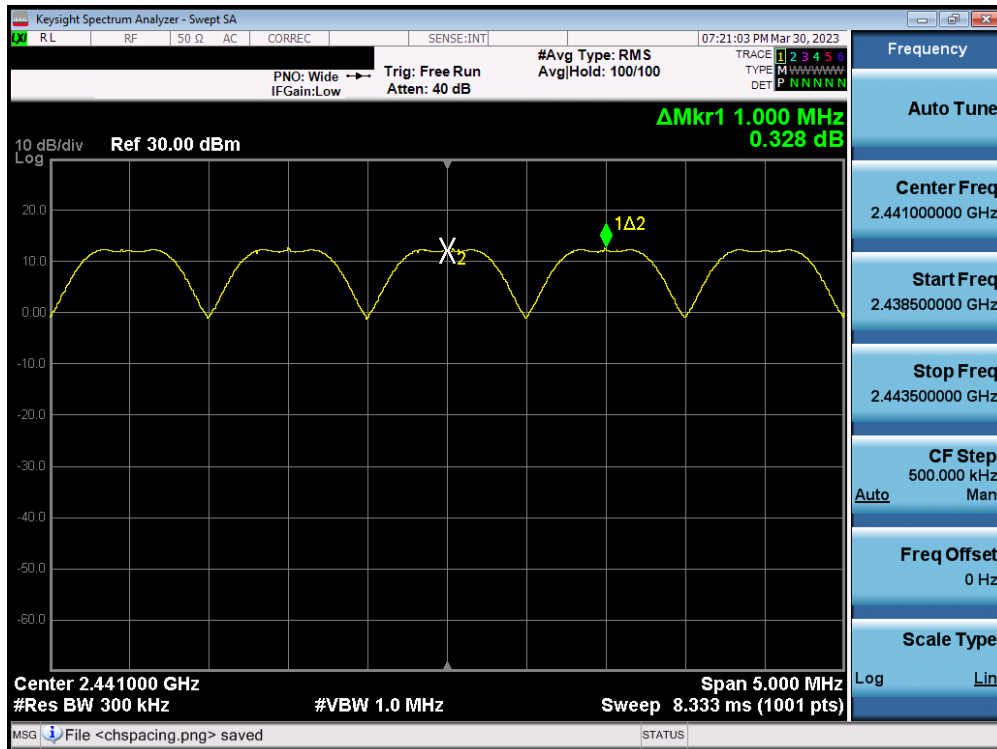

Plot 7-47. Channel Spacing Plot NB UNII_L (Bluetooth, GFSK, iPA, 2.4GHz)

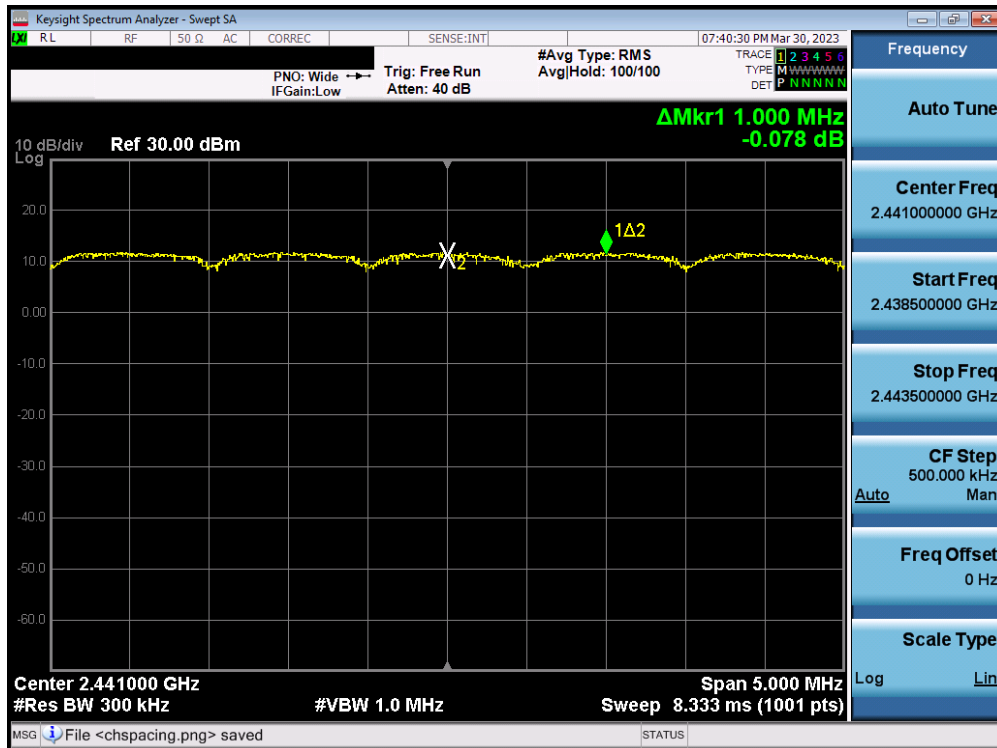

Plot 7-48. Channel Spacing Plot NB UNII_L (Bluetooth, 8DPSK, iPA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 53 of 108

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(d)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. **The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW \leq channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

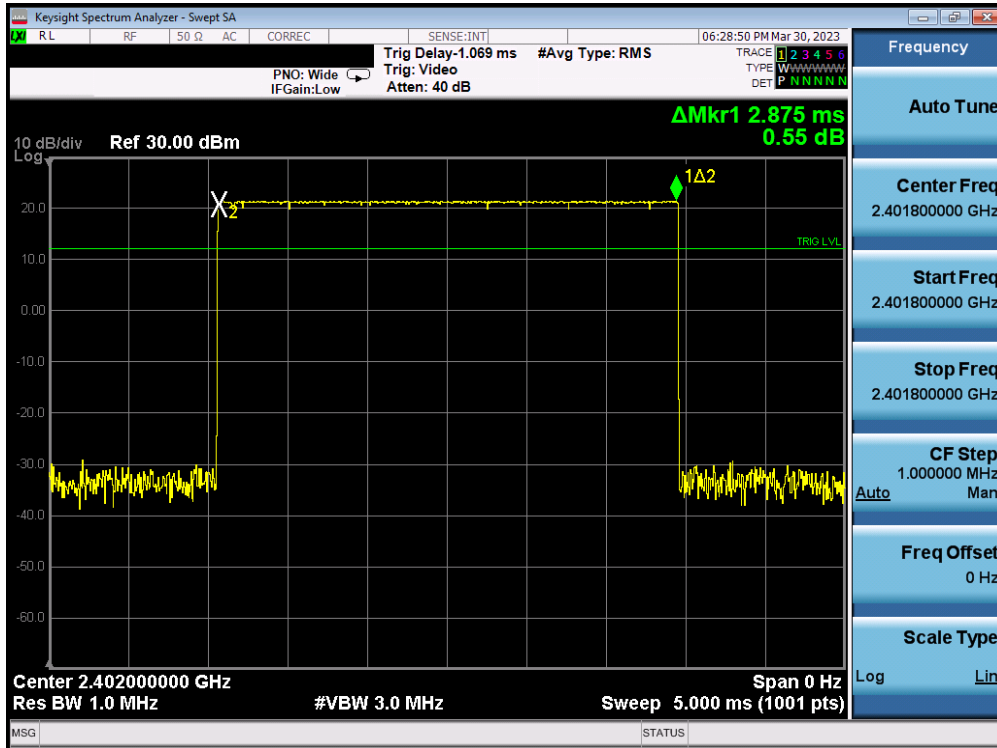


Figure 7-5. Test Instrument & Measurement Setup


Test Notes

All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 54 of 108




Plot 7-49. Time of Occupancy Plot Ant1 (Bluetooth, GFSK, ePA, 2.4GHz)

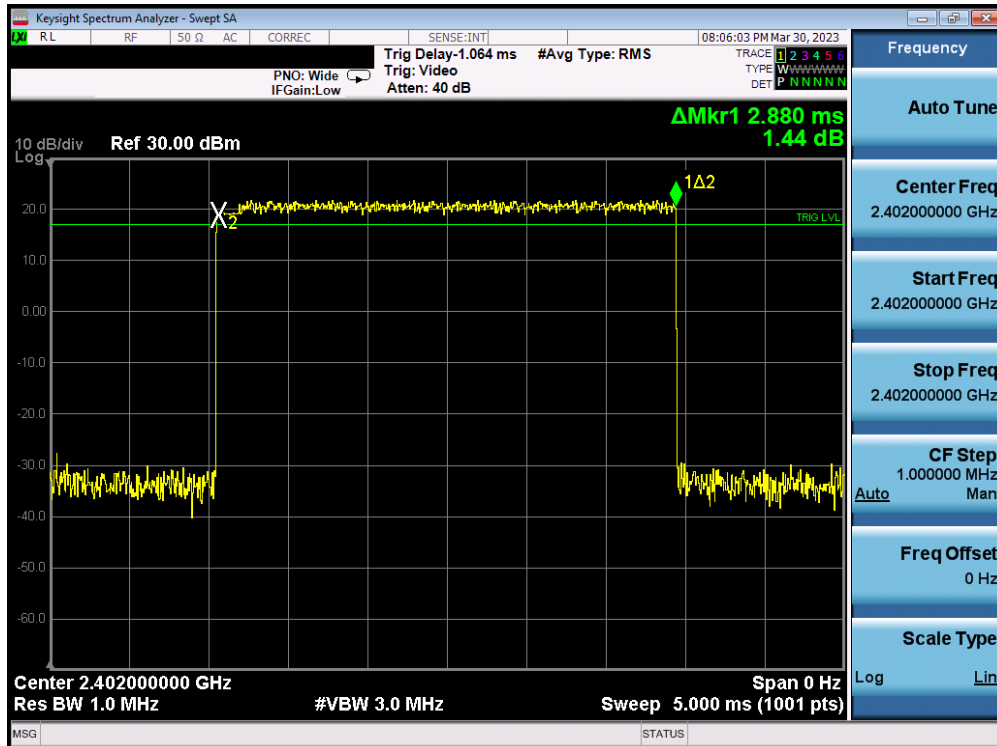


Plot 7-50. Time of Occupancy Plot Ant1 (Bluetooth, 8DPSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 55 of 108

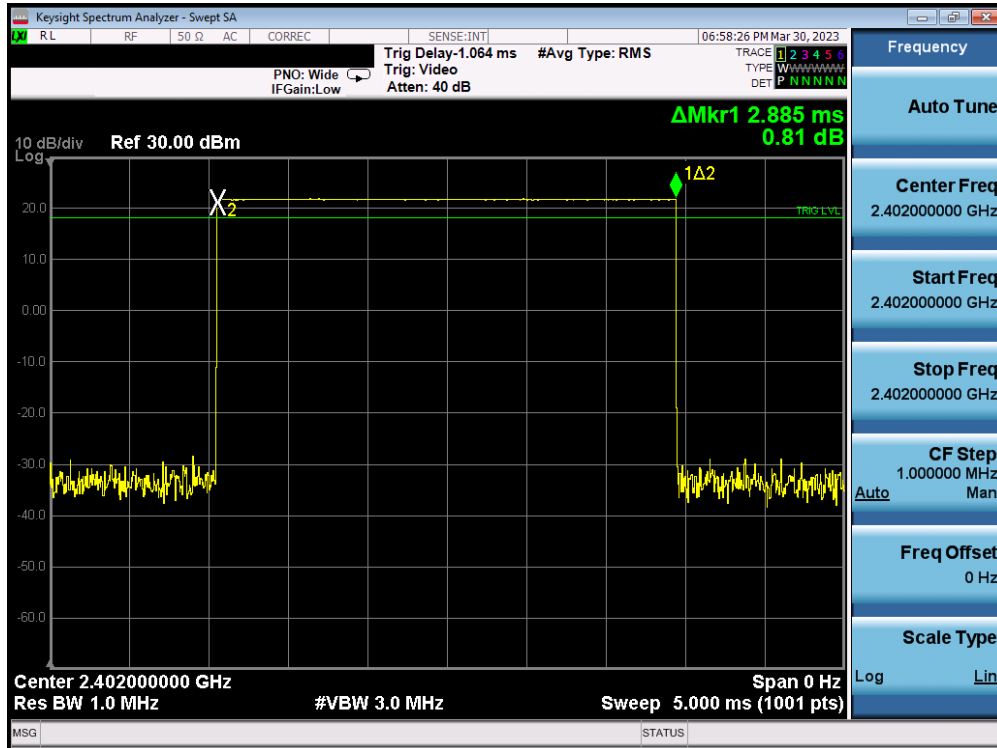


Plot 7-51. Time of Occupancy Plot Ant2 (Bluetooth, GFSK, ePA, 2.4GHz)

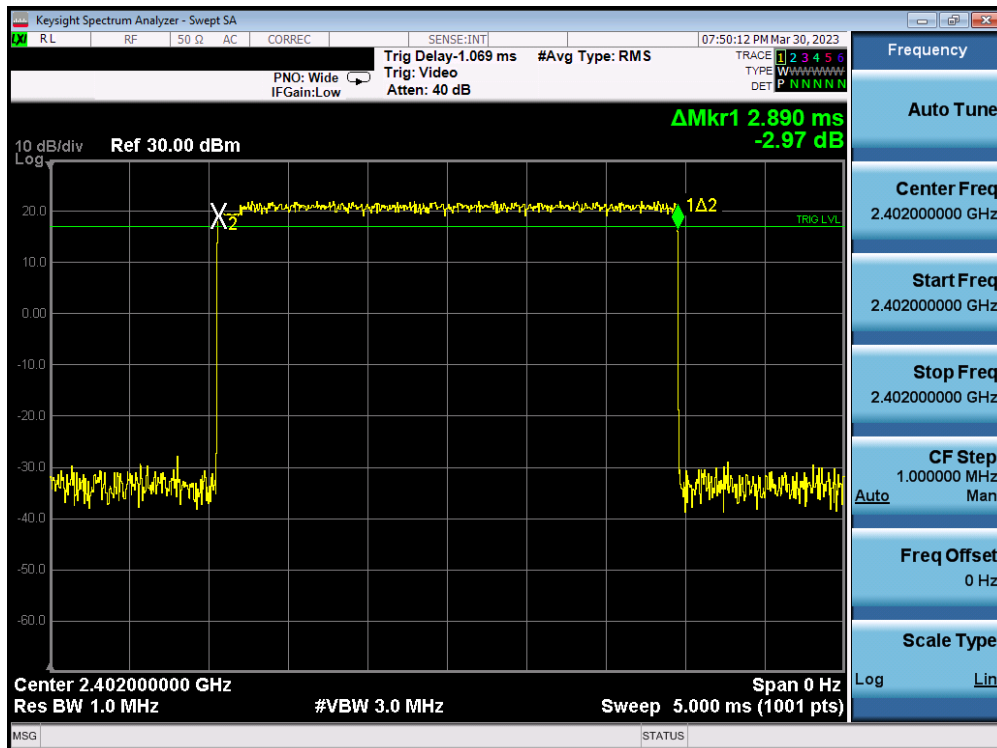


Plot 7-52. Time of Occupancy Plot Ant2 (Bluetooth, 8DPSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 56 of 108

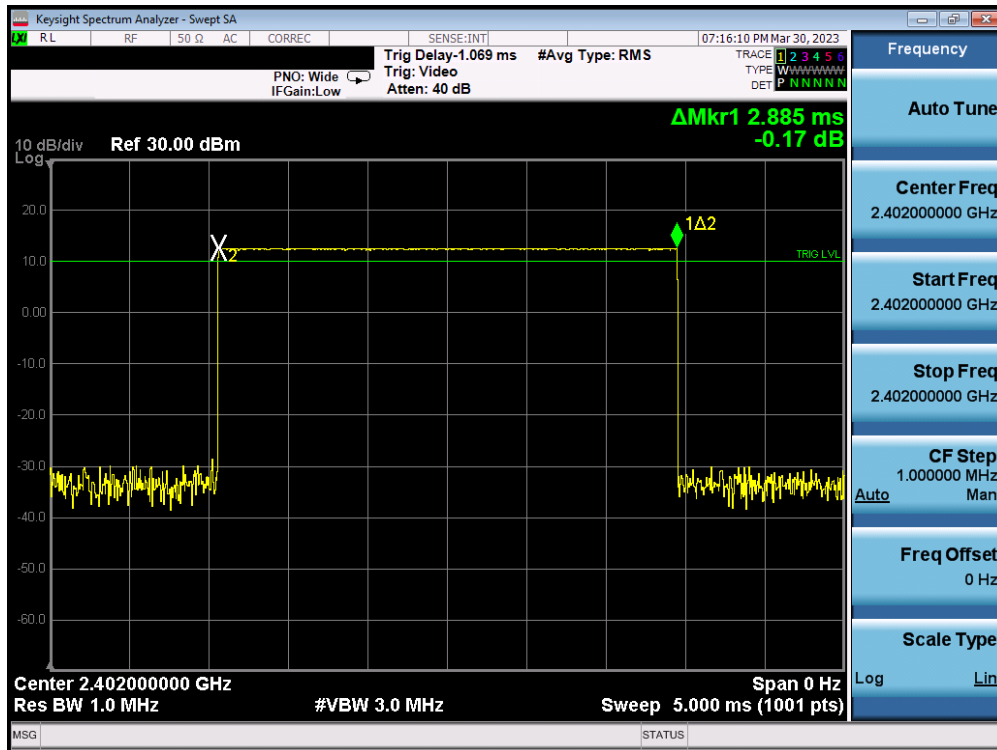

Plot 7-53. Time of Occupancy Plot NB UNII_L (Bluetooth, GFSK, iPA, 2.4GHz)

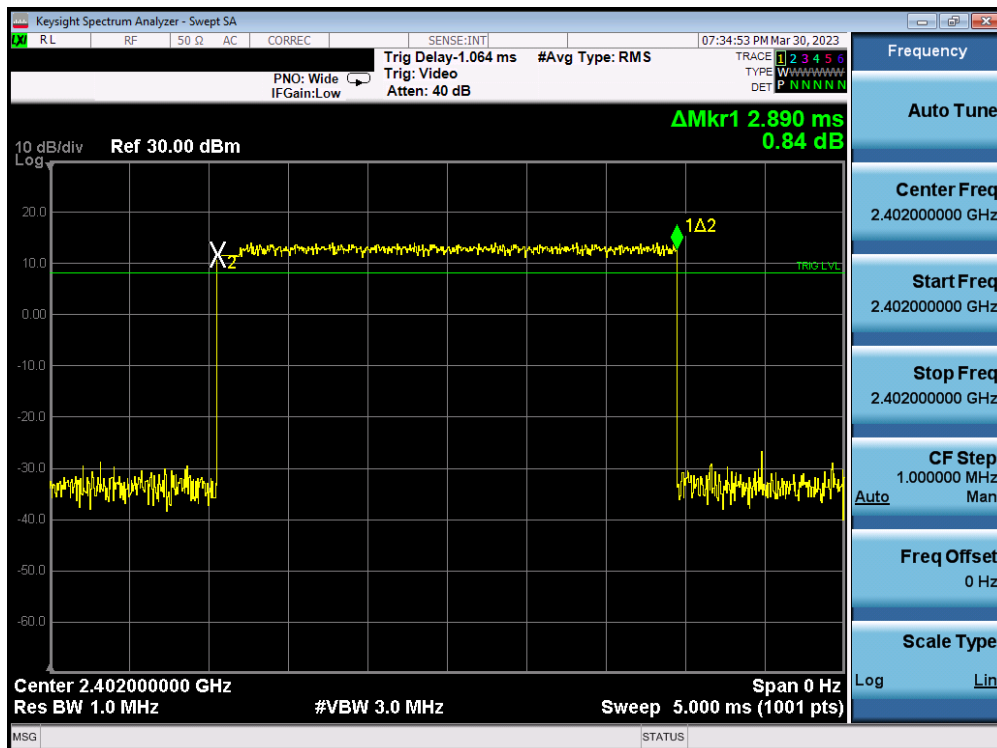

Plot 7-54. Time of Occupancy Plot NB UNII_L (Bluetooth, 8DPSK, iPA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 57 of 108



Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- 266.67 hops/second / 79 channels = 3.38 hops/second (# of hops/second on one channel)
- 3.38 hops/second/channel x 31.6 seconds = 106.67 hops (# hops over a 31.6 second period)
- 106.67 hops x 2.89 ms/channel = 308.27 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- 133.3 hops/s / 20 channels = 6.67 hops/second (# of hops/second on one channel)
- 6.67 hops/s / channel x 8 seconds = 53.34 hops (# hops over a 8 second period)
- 53.34 hops x 2.89 ms/channel = 154.15 ms (worst case dwell time for one channel in AFH mode)

Test Result

The measured worst case dwell time is below the limit of 0.4s.

FCC ID: BCGA2117 IC: 579C-A2117	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 58 of 108

V 10.5 12/15/2021

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(d)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

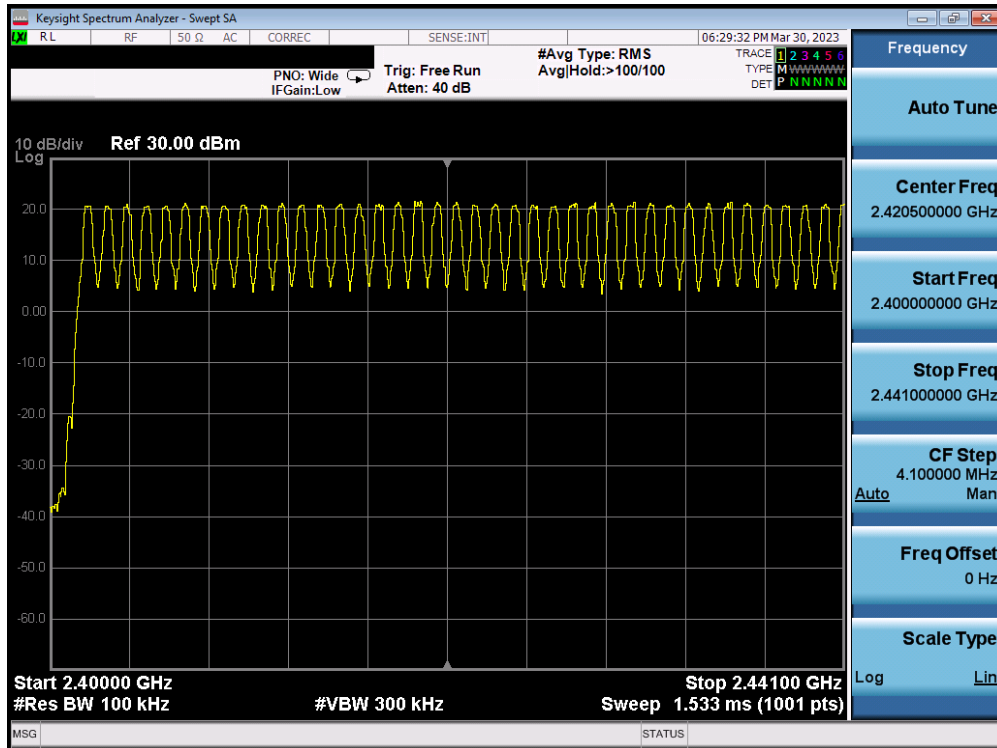


Figure 7-6. Test Instrument & Measurement Setup


Test Notes

1. The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2117 IC: 579C-A2117	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 59 of 108




Plot 7-55. Low End Spectrum Channel Hopping Plot Ant1 (Bluetooth, GFSK, ePA, 2.4GHz)

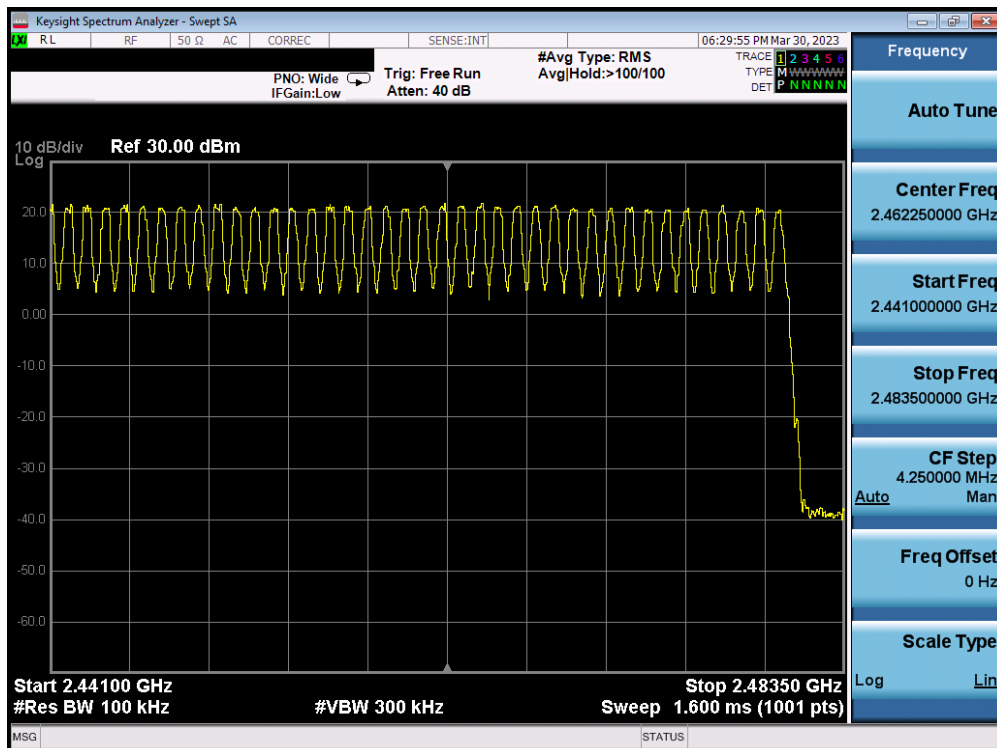


Plot 7-56. High End Spectrum Channel Hopping Plot Ant1 (Bluetooth, GFSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 60 of 108

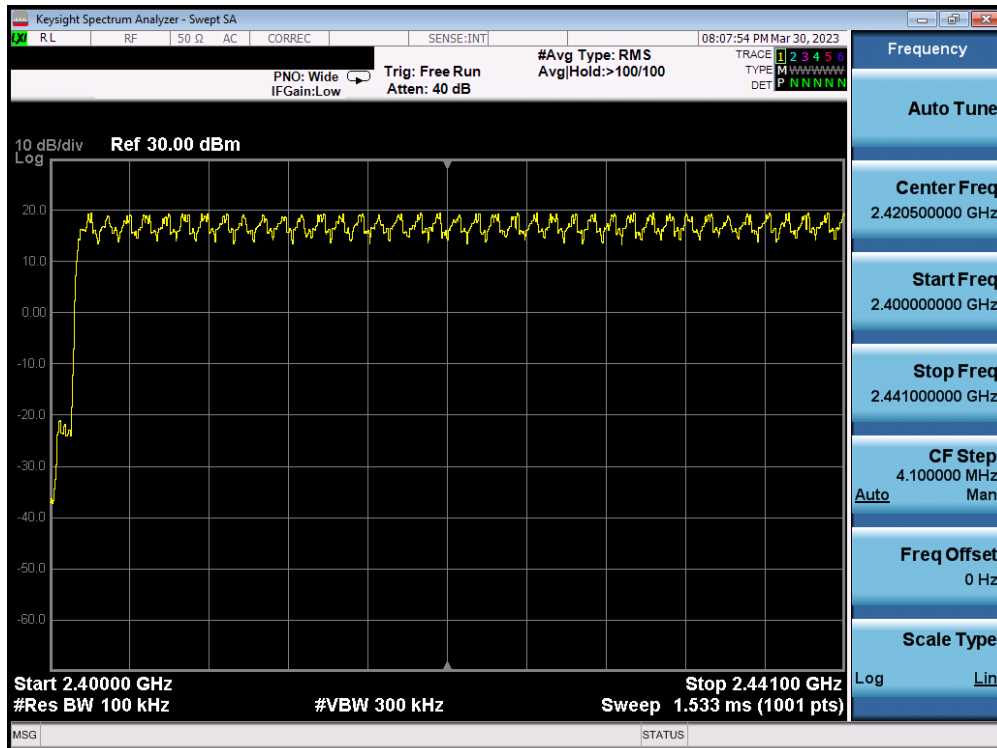


Plot 7-57. Low End Spectrum Channel Hopping Plot Ant1 (Bluetooth, 8DPSK, ePA, 2.4GHz)

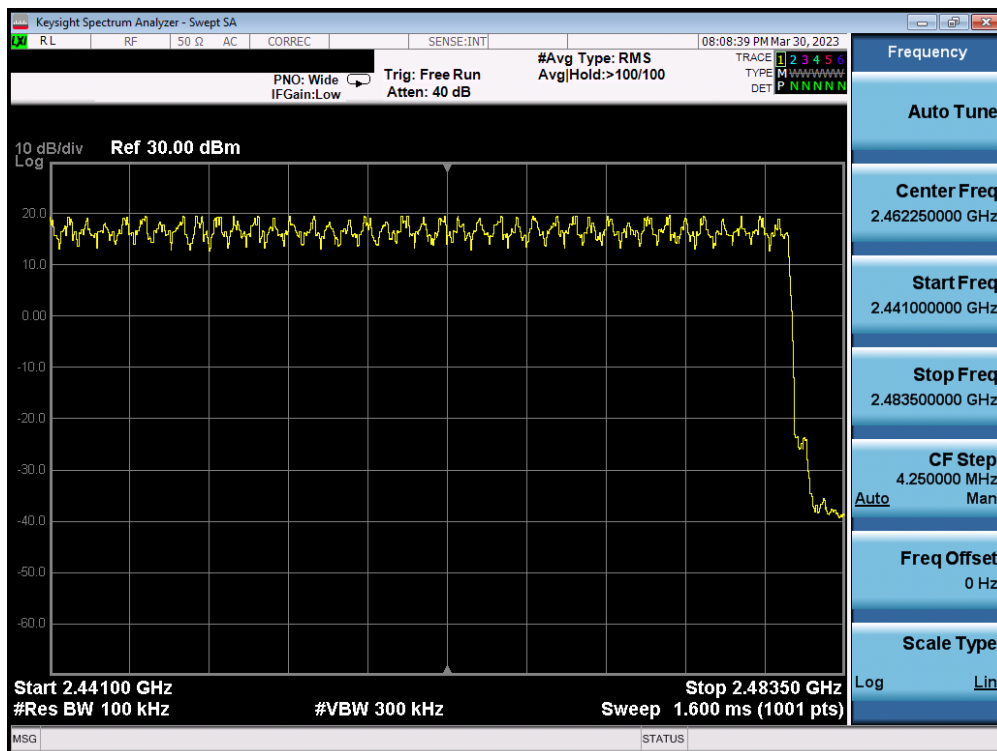


Plot 7-58. High End Spectrum Channel Hopping Plot Ant1 (Bluetooth, 8DPSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 61 of 108

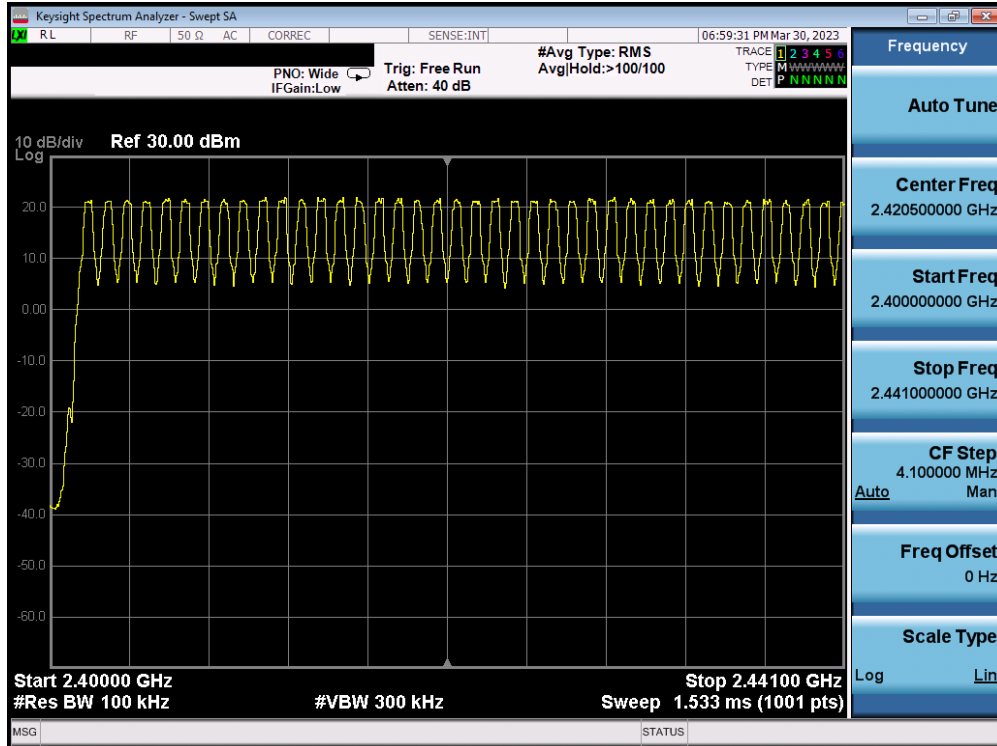


Plot 7-59. Low End Spectrum Channel Hopping Plot Ant2 (Bluetooth, GFSK, ePA, 2.4GHz)

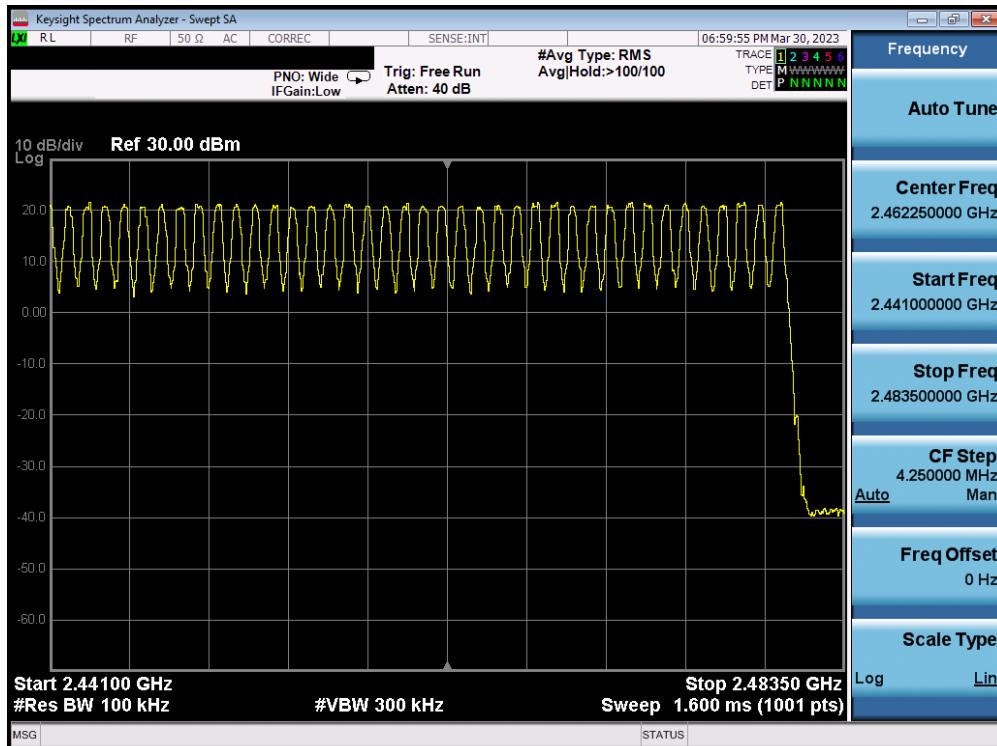


Plot 7-60. High End Spectrum Channel Hopping Plot Ant2 (Bluetooth, GFSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 62 of 108

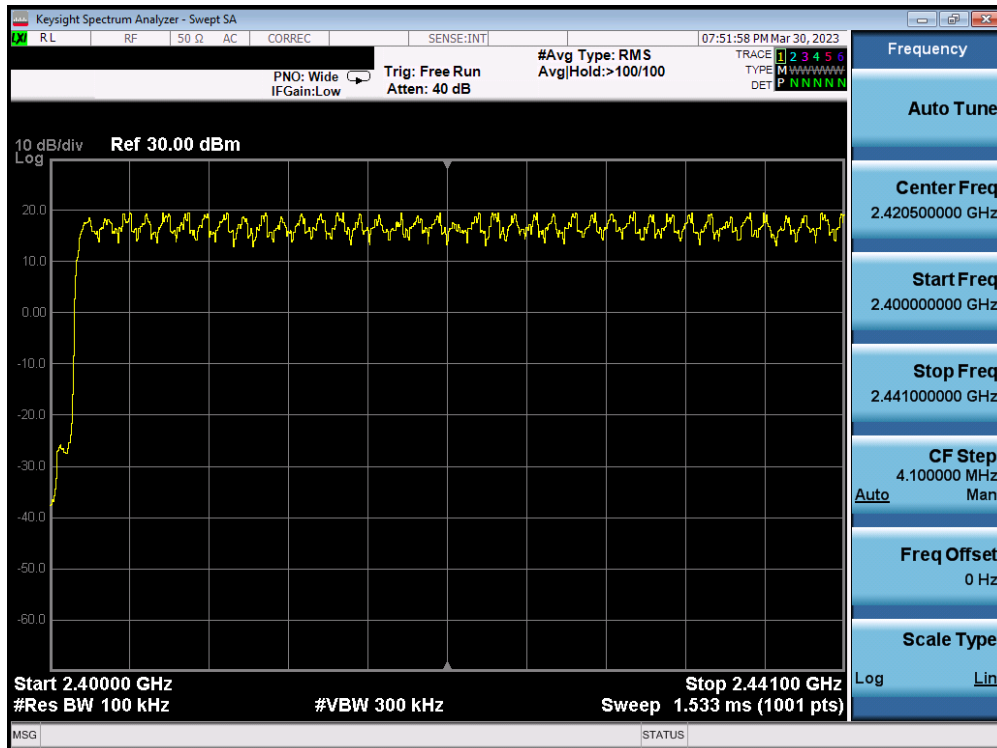


Plot 7-61. Low End Spectrum Channel Hopping Plot Ant2 (Bluetooth, 8DPSK, ePA, 2.4GHz)

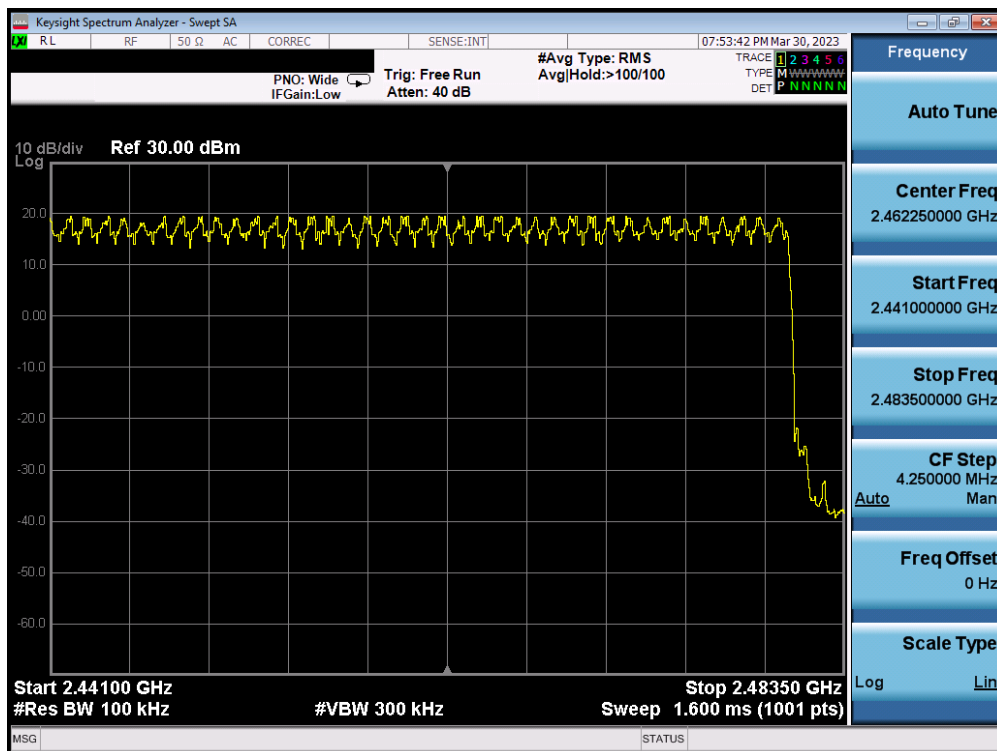


Plot 7-62. High End Spectrum Channel Hopping Plot Ant2 (Bluetooth, 8DPSK, ePA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 63 of 108

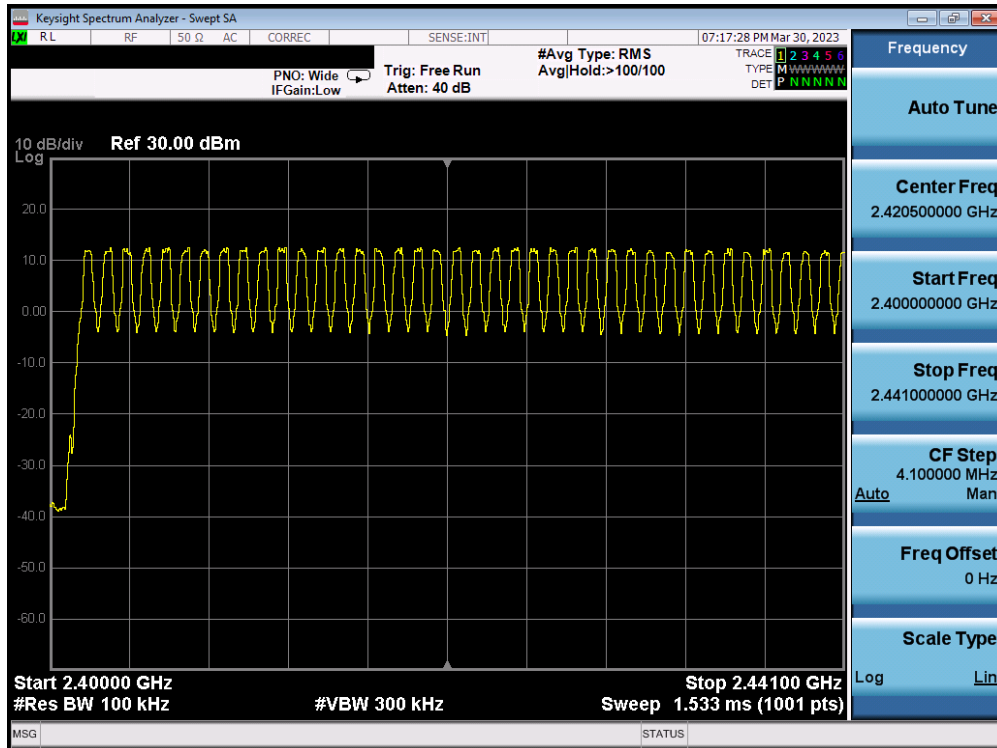


Plot 7-63. Low End Spectrum Channel Hopping Plot NB UNII_L (Bluetooth, GFSK, iPA, 2.4GHz)

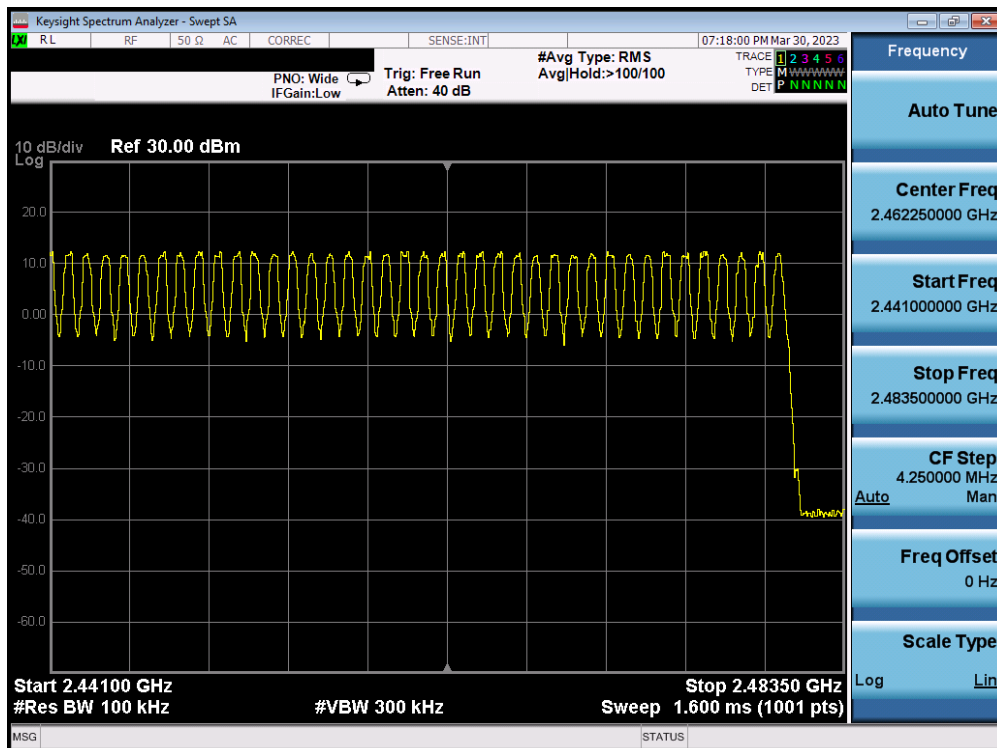


Plot 7-64. High End Spectrum Channel Hopping Plot NB UNII_L (Bluetooth, GFSK, iPA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 64 of 108

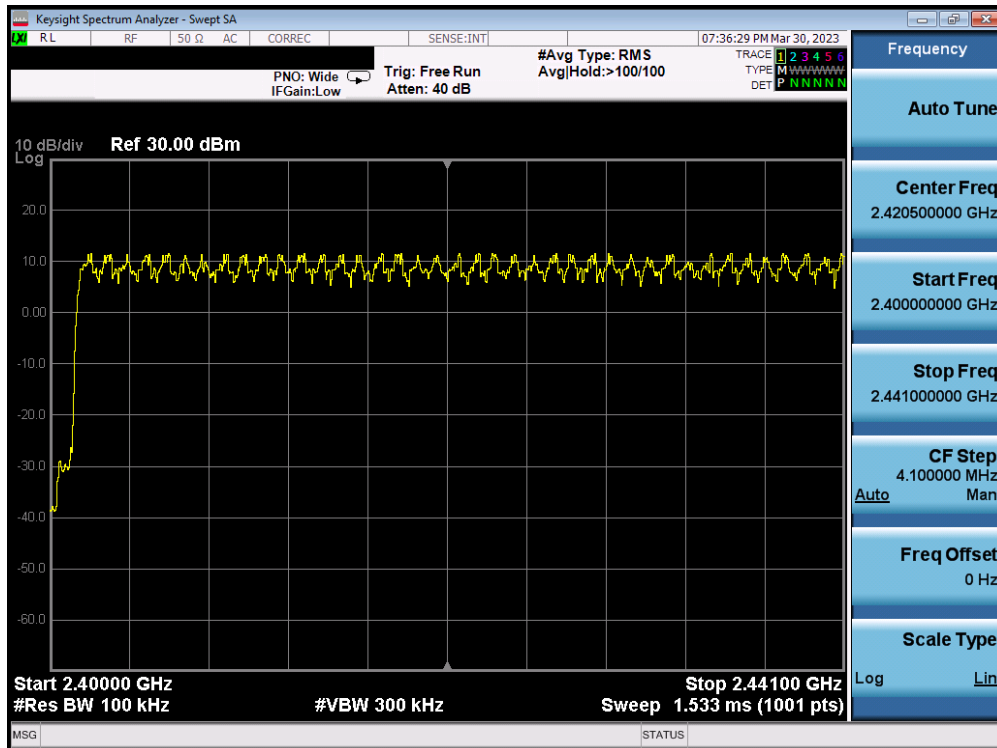

Plot 7-65. Low End Spectrum Channel Hopping Plot NB UNII_L (Bluetooth, 8DPSK, iPA, 2.4GHz)

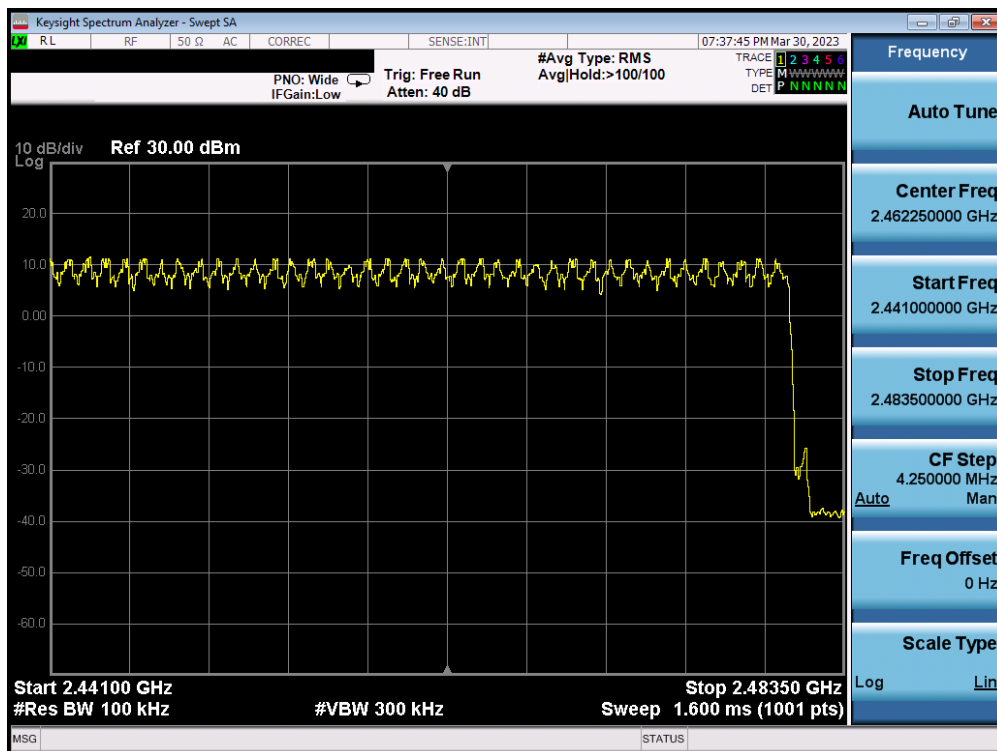

Plot 7-66. High End Spectrum Channel Hopping Plot NB UNII_L (Bluetooth, 8DPSK, iPA, 2.4GHz)

FCC ID: BCGA2117 IC: 579C-A2117		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2302130007-01.BCG	Test Dates: 2/10/2023 - 5/5/2023	EUT Type: Head Mounted Device	Page 65 of 108