



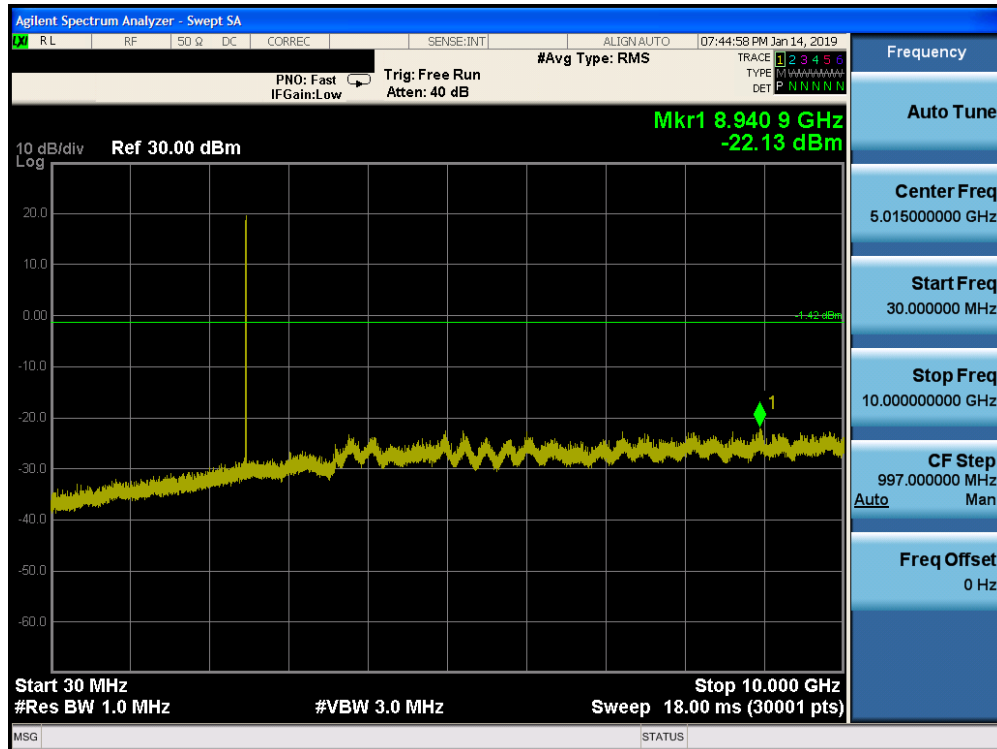


Plot 7-71. Conducted Spurious Plot ANT 0 (Bluetooth (LE), 1Mbps ePA – Ch. 39)

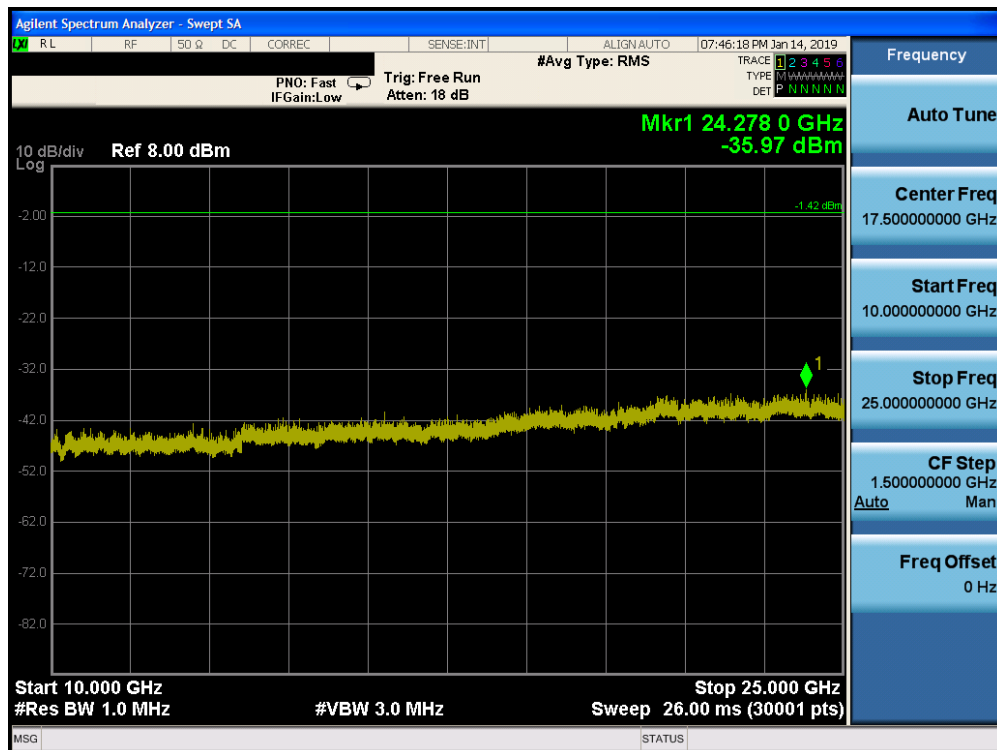


Plot 7-72. Conducted Spurious Plot ANT 0 (Bluetooth (LE), 1Mbps ePA – Ch. 39)

FCC ID: BCGA2126	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 66 of 107

Antenna 1

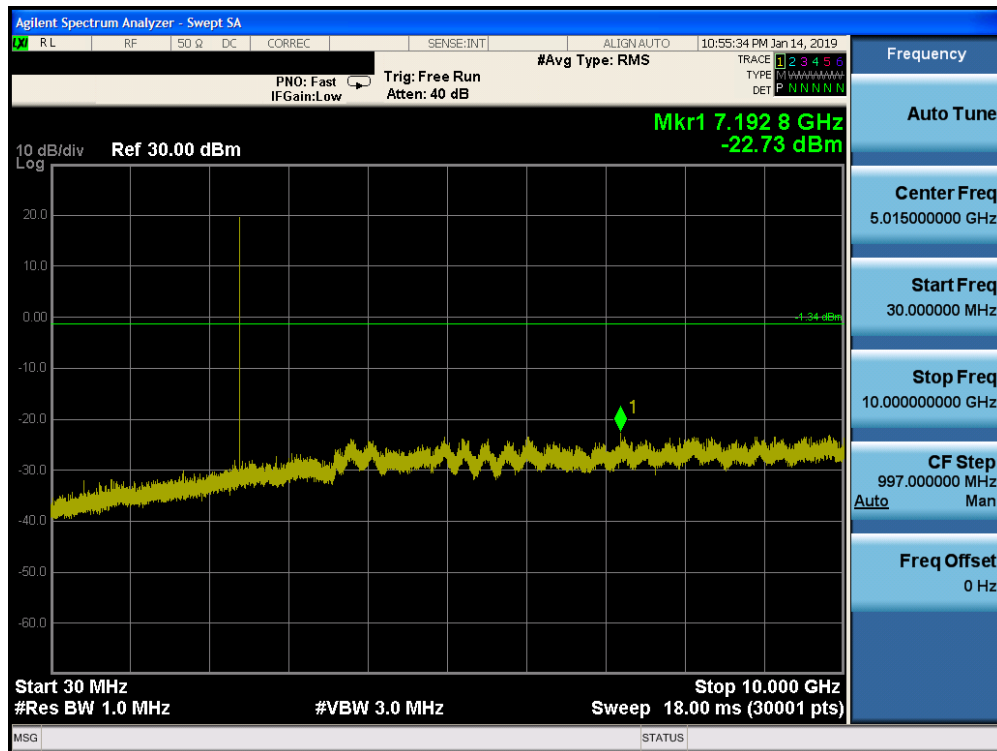


Plot 7-73. Conducted Spurious Plot ANT 1 (Bluetooth (LE), 1Mbps ePA – Ch. 0)

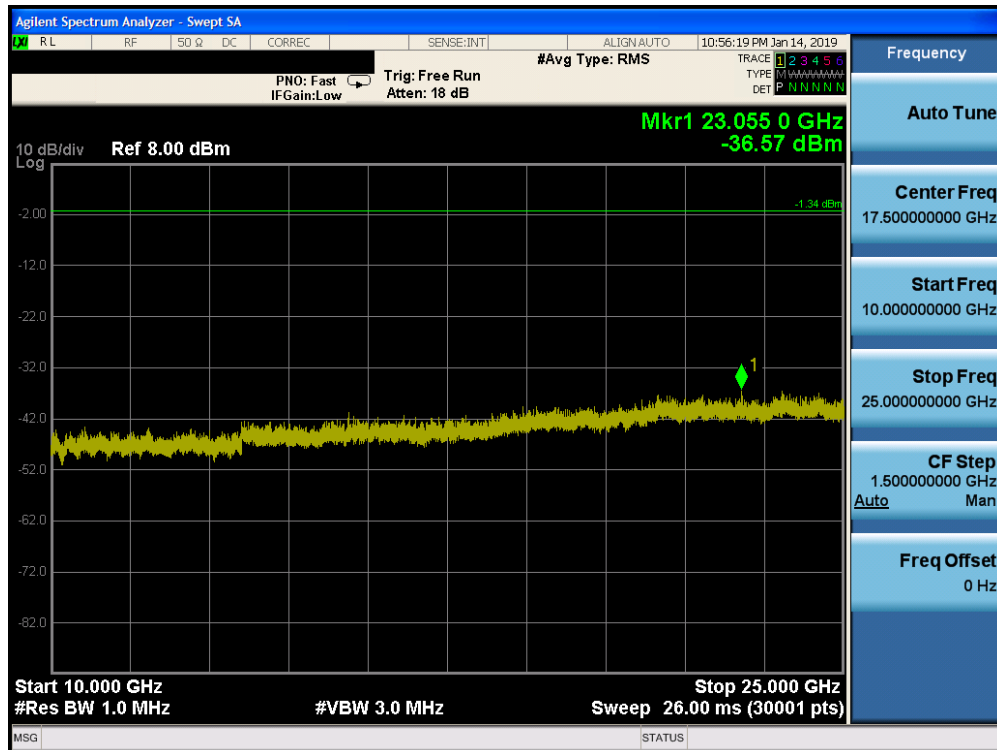


Plot 7-74. Conducted Spurious Plot ANT 1 (Bluetooth (LE), 1Mbps ePA – Ch. 0)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 67 of 107

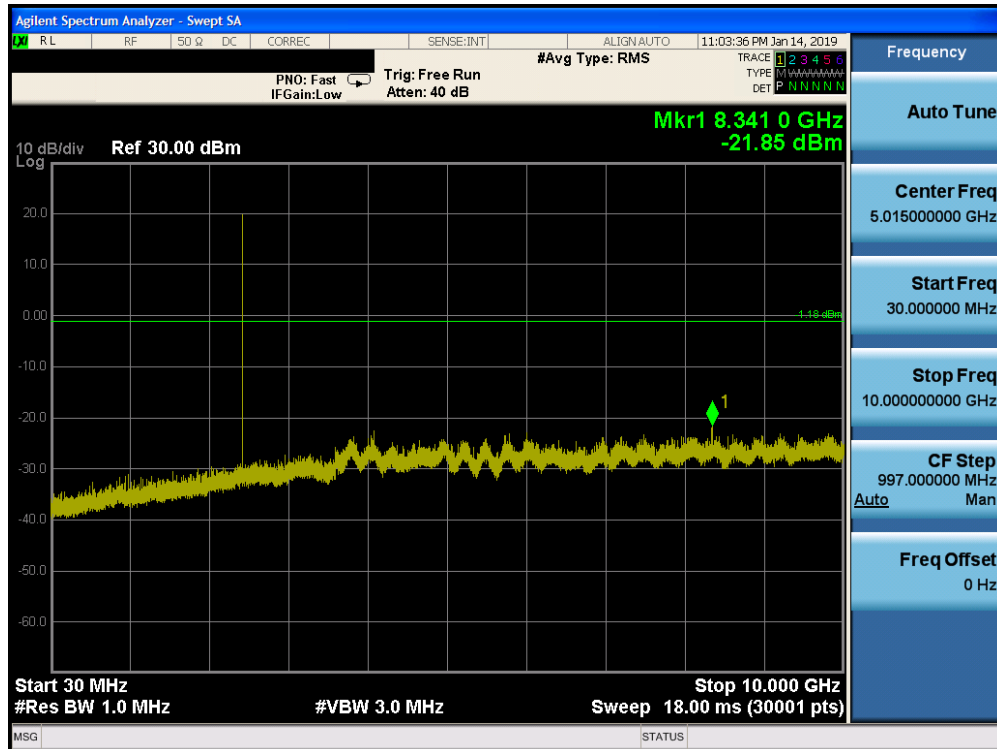


Plot 7-75. Conducted Spurious Plot ANT 1 (Bluetooth (LE), 1Mbps ePA – Ch. 19)

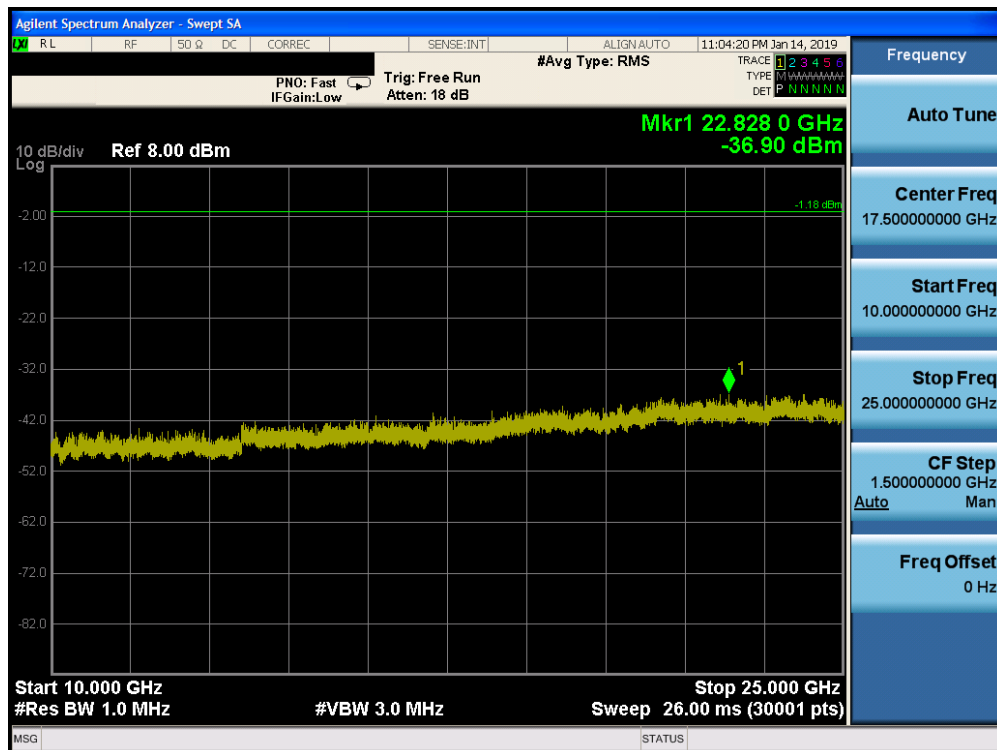


Plot 7-76. Conducted Spurious Plot ANT 1 (Bluetooth (LE), 1Mbps ePA – Ch. 19)

FCC ID: BCGA2126	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 68 of 107

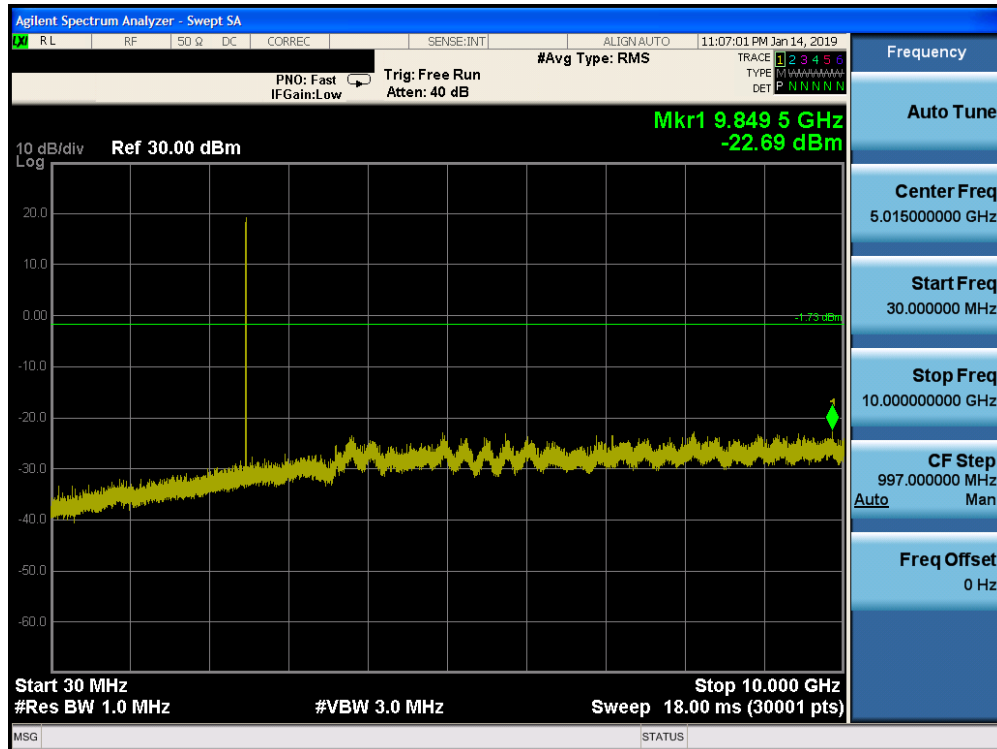


Plot 7-77. Conducted Spurious Plot ANT 1 (Bluetooth (LE), 1Mbps ePA – Ch. 39)

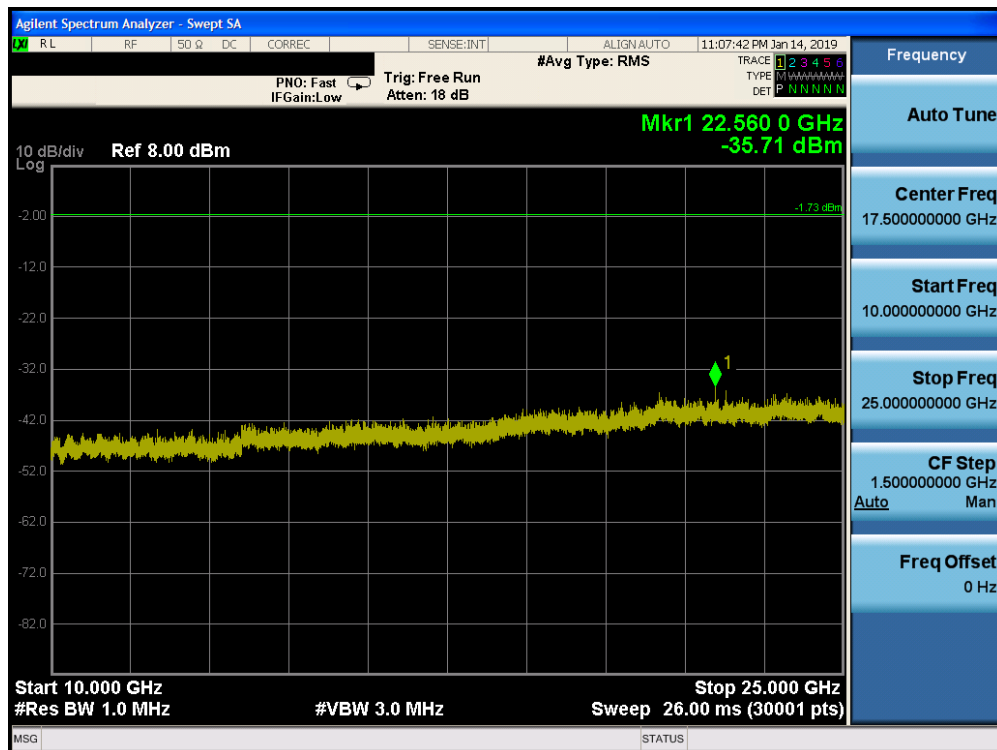


Plot 7-78. Conducted Spurious Plot ANT 1 (Bluetooth (LE), 1Mbps ePA – Ch. 39)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 69 of 107

Antenna 2

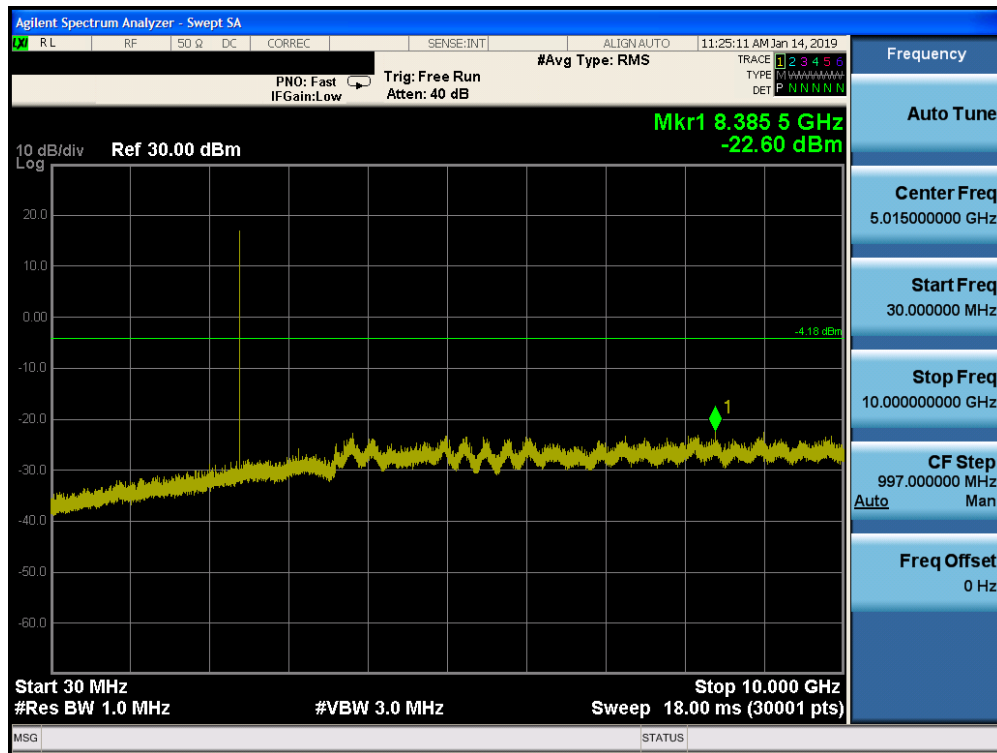


Plot 7-79. Conducted Spurious Plot ANT 2 (Bluetooth (LE), 1Mbps ePA - Ch. 0)

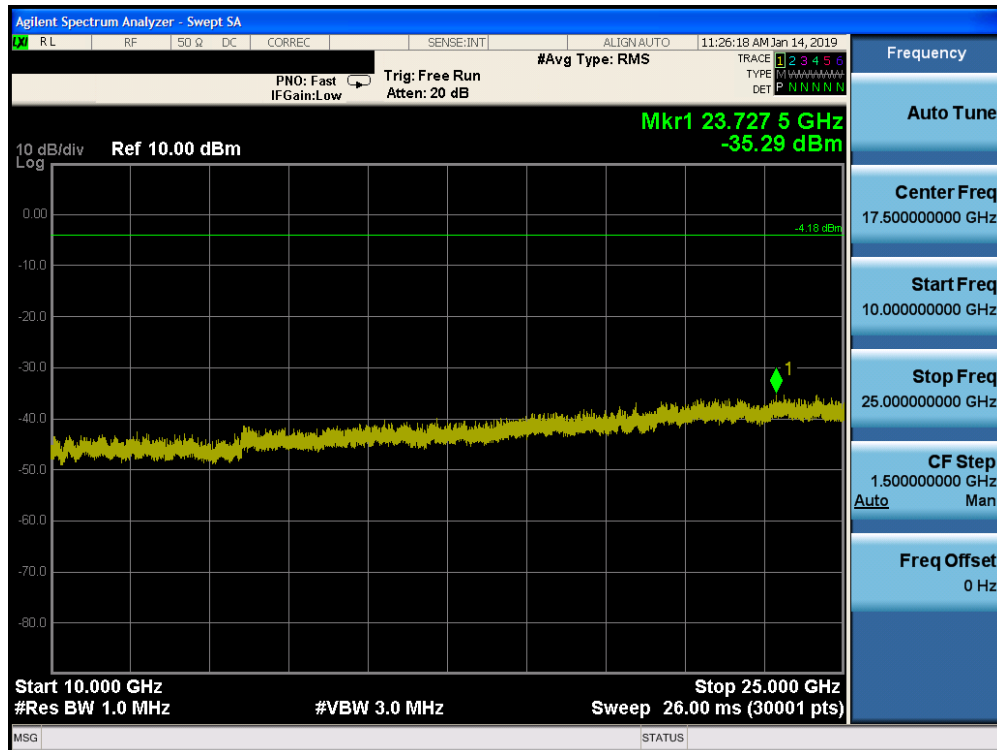


Plot 7-80. Conducted Spurious Plot ANT 2 (Bluetooth (LE), 1Mbps ePA - Ch. 0)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 70 of 107

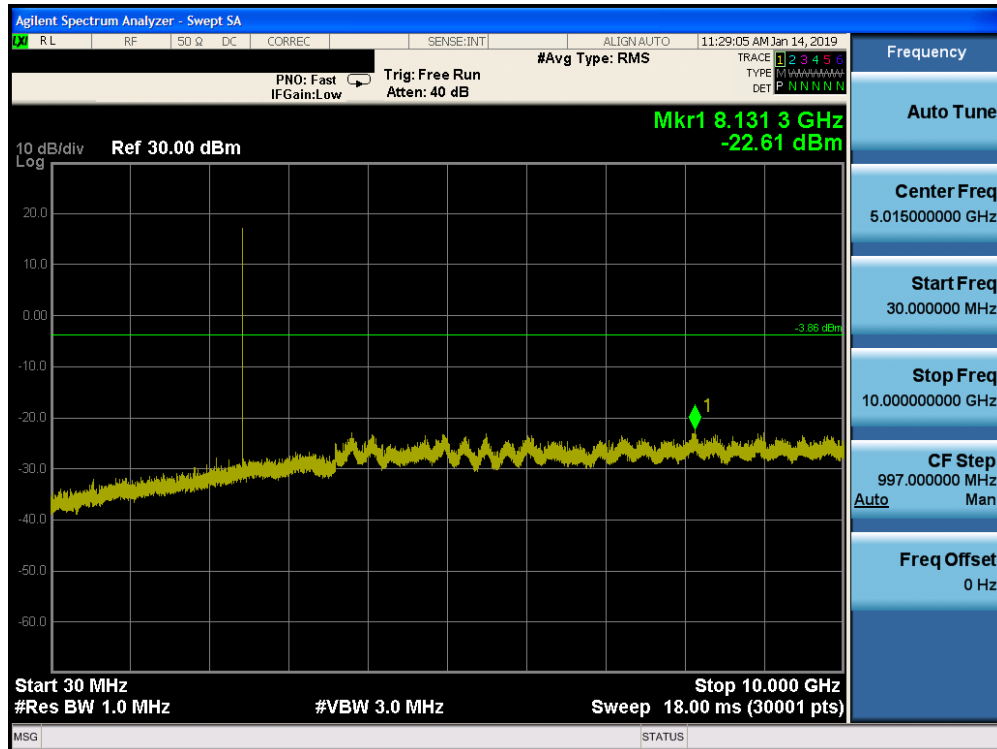


Plot 7-81. Conducted Spurious Plot ANT 2 (Bluetooth (LE), 1Mbps ePA – Ch. 19)

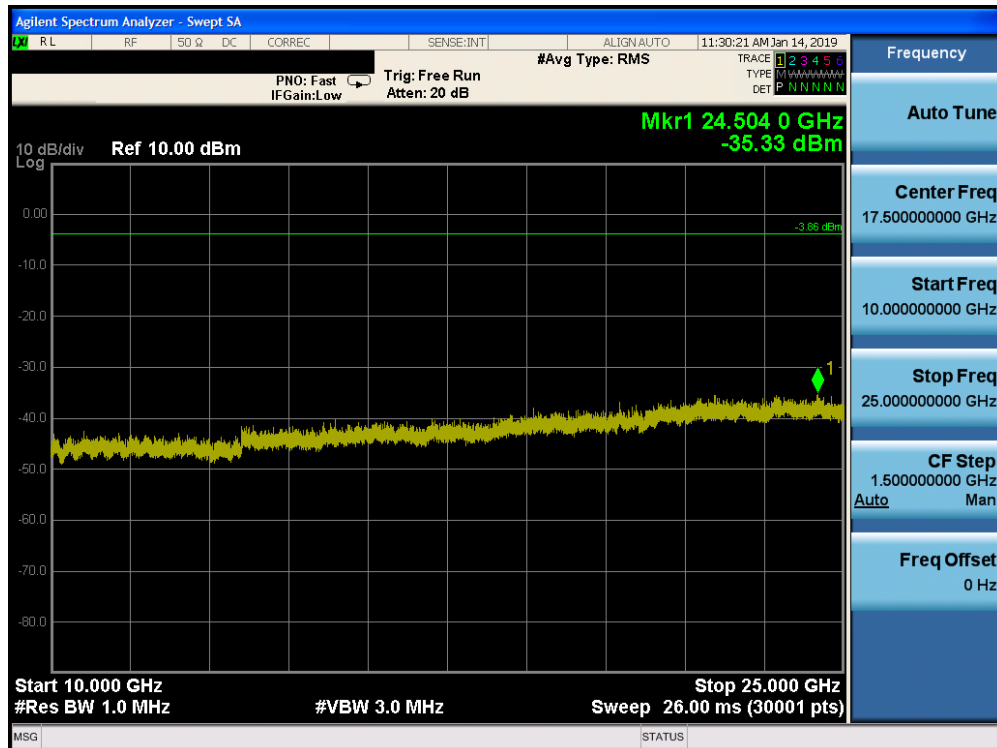


Plot 7-82. Conducted Spurious Plot ANT 2 (Bluetooth (LE), 1Mbps ePA – Ch. 19)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 71 of 107

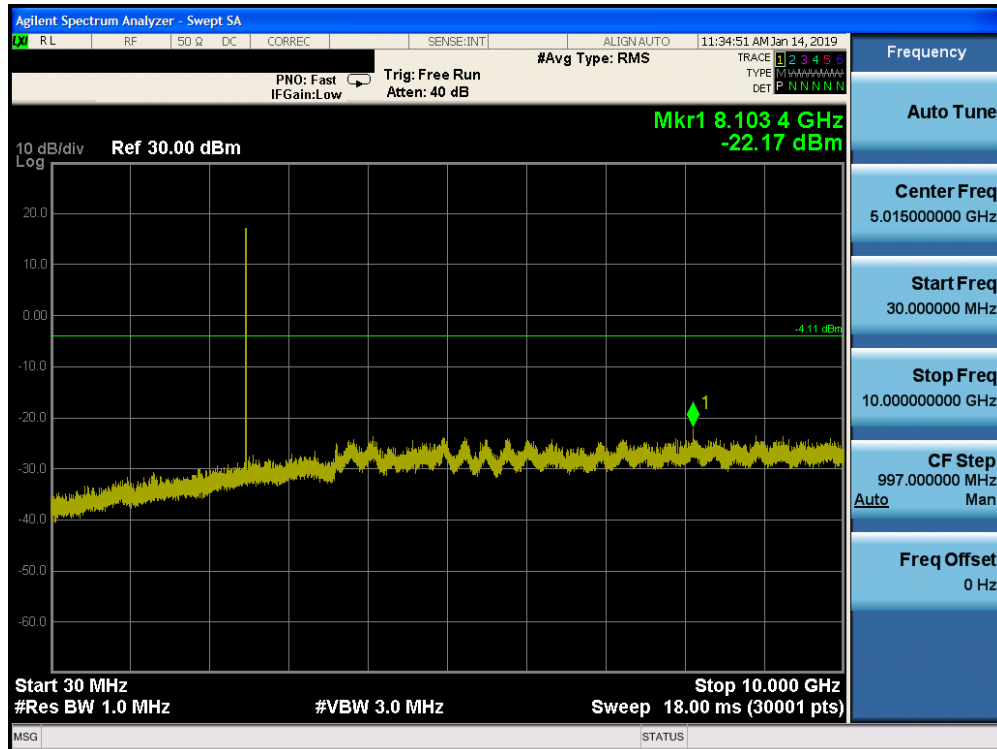

Plot 7-83. Conducted Spurious Plot ANT 2 (Bluetooth (LE), 1Mbps ePA – Ch. 39)

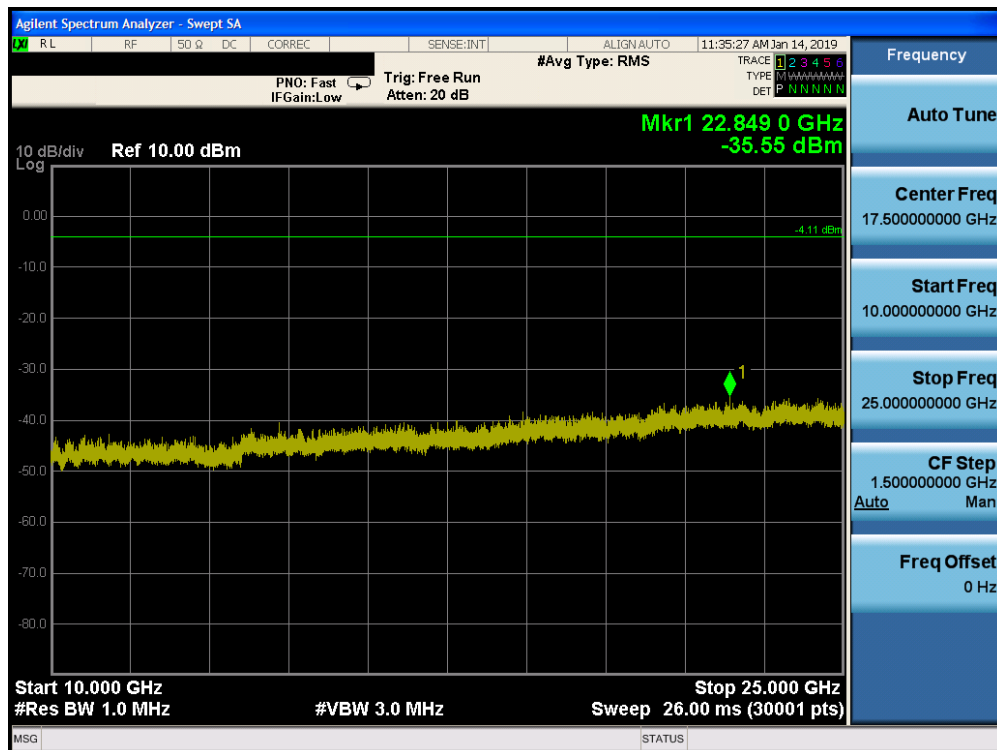

Plot 7-84. Conducted Spurious Plot ANT 2 (Bluetooth (LE), 1Mbps ePA – Ch. 39)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 72 of 107

7.7 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-14 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-14. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v05 – Section 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3kHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

FCC ID: BCGA2126		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 73 of 107

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-15 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-15. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

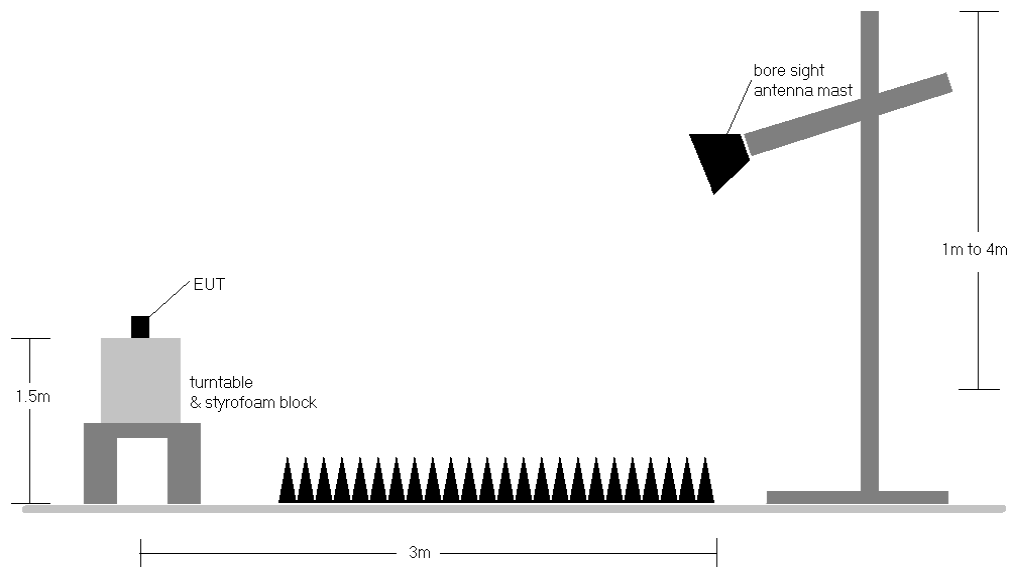


Figure 7-6. Radiated Test Setup >1GHz

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 74 of 107

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-14.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement..
8. Both power schemes were investigated, and only the worst case is reported.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$
- Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 0 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA2126		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 75 of 107


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]


Antenna 0

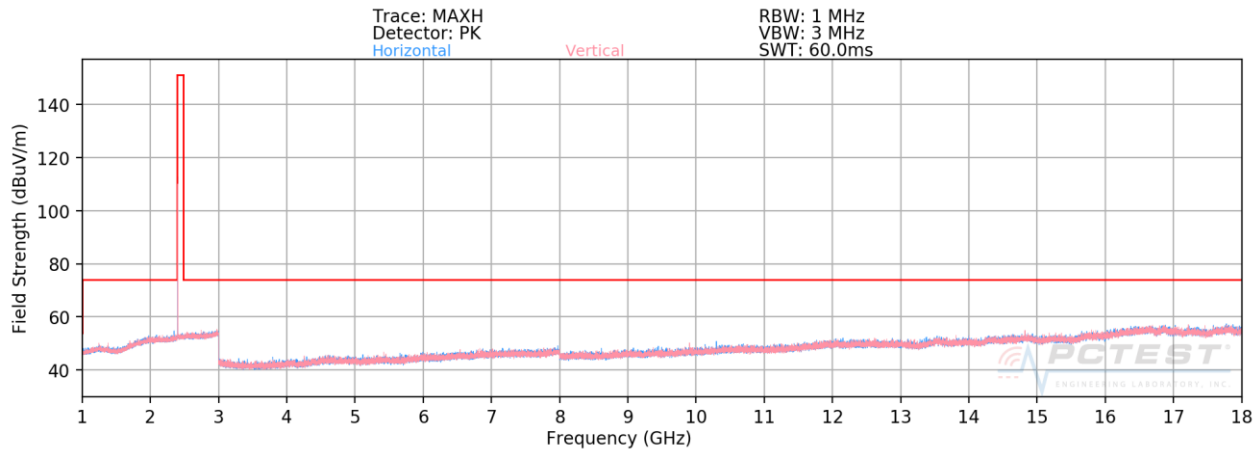

Plot 7-85. Radiated Spurious Plot Above 1GHz ANT 0 (1Mbps, ePA – Ch. 0)

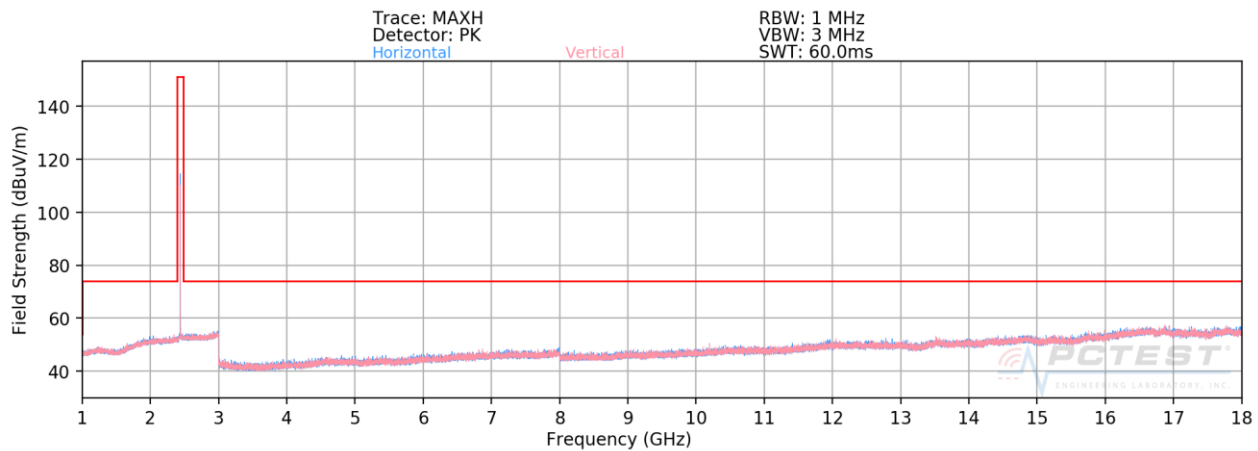

Plot 7-86. Radiated Spurious Plot Above 1GHz ANT 0 (1Mbps, ePA – Ch. 19)

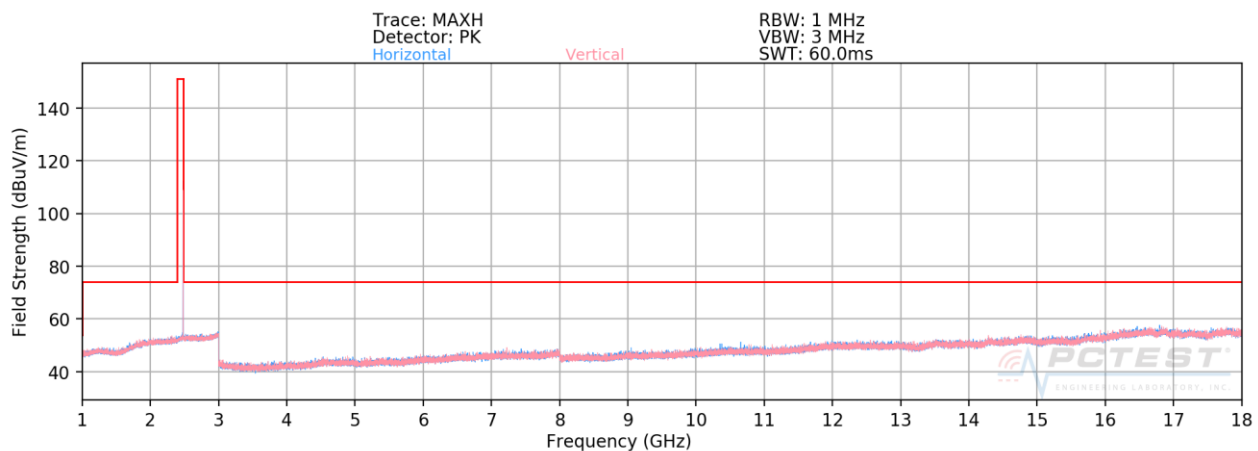


FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 76 of 107


Plot 7-87. Radiated Spurious Plot Above 1GHz ANT 0 (1Mbps, ePA – Ch. 39)

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 77 of 107


Antenna 1

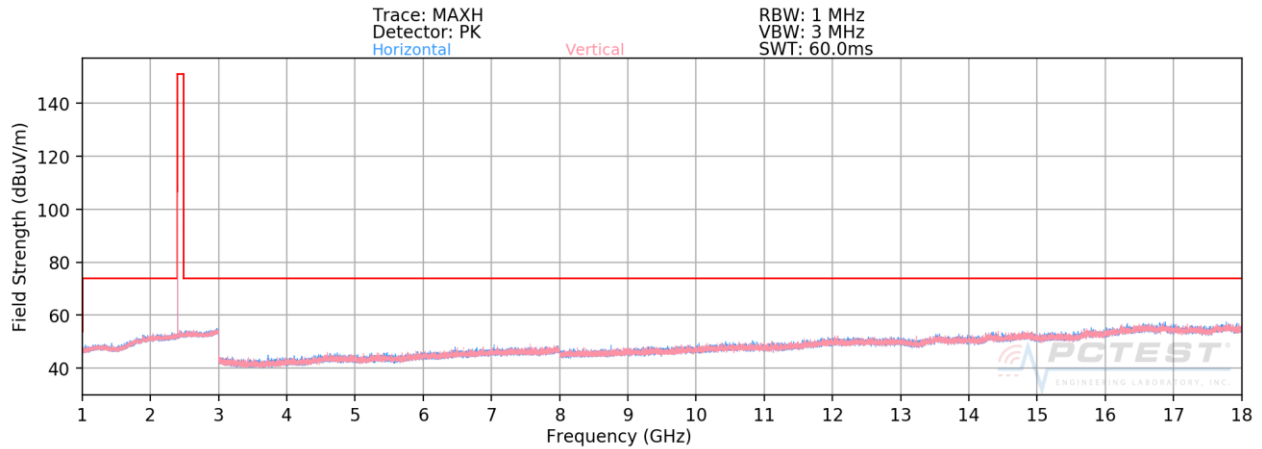

Plot 7-88. Radiated Spurious Plot Above 1GHz ANT 1 (1Mbps, ePA – Ch. 0)

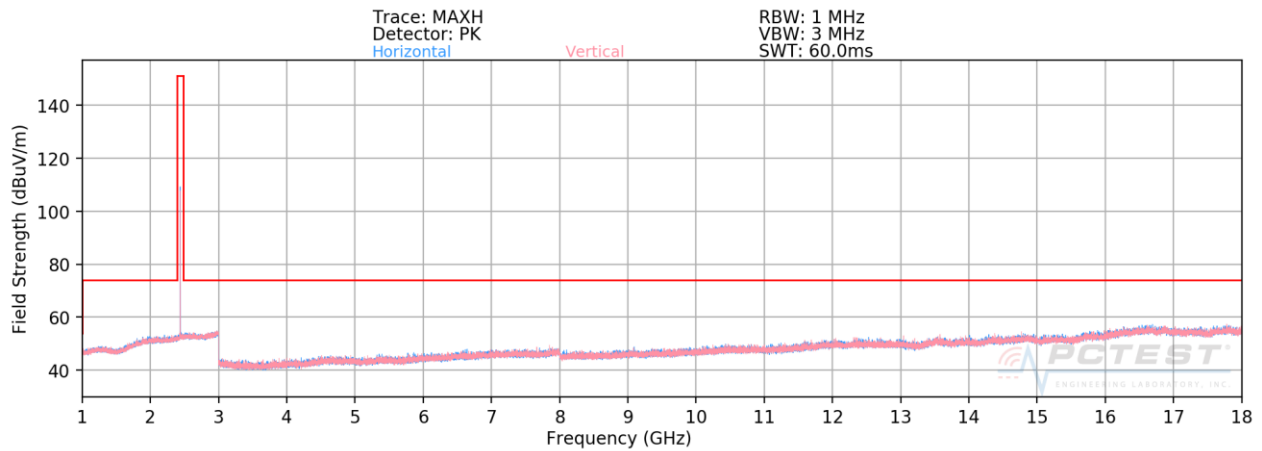


Plot 7-89. Radiated Spurious Plot Above 1GHz ANT 1 (1Mbps, ePA – Ch. 19)

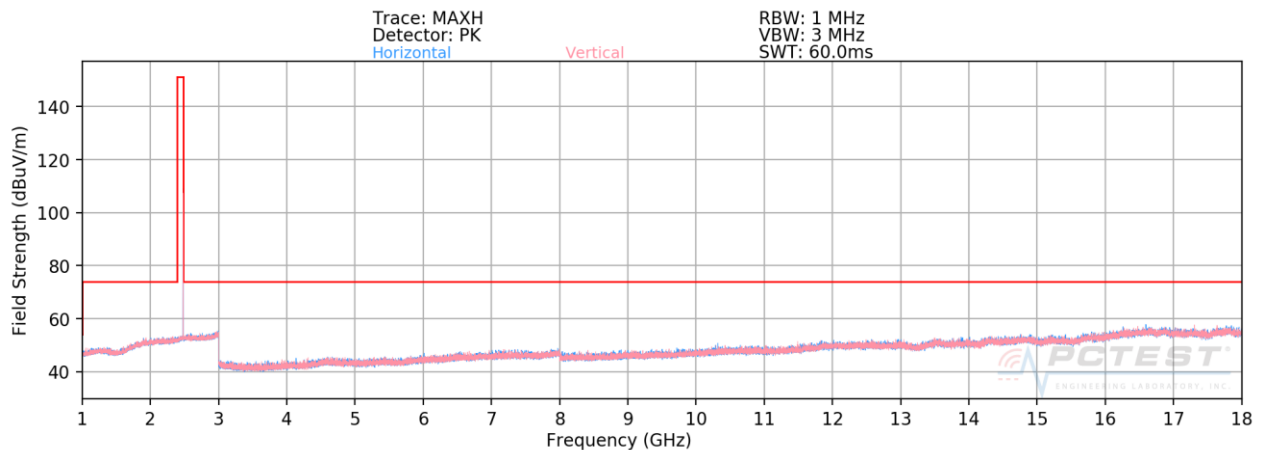


Plot 7-90. Radiated Spurious Plot Above 1GHz ANT 1 (1Mbps, ePA – Ch. 39)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 78 of 107


Antenna 2

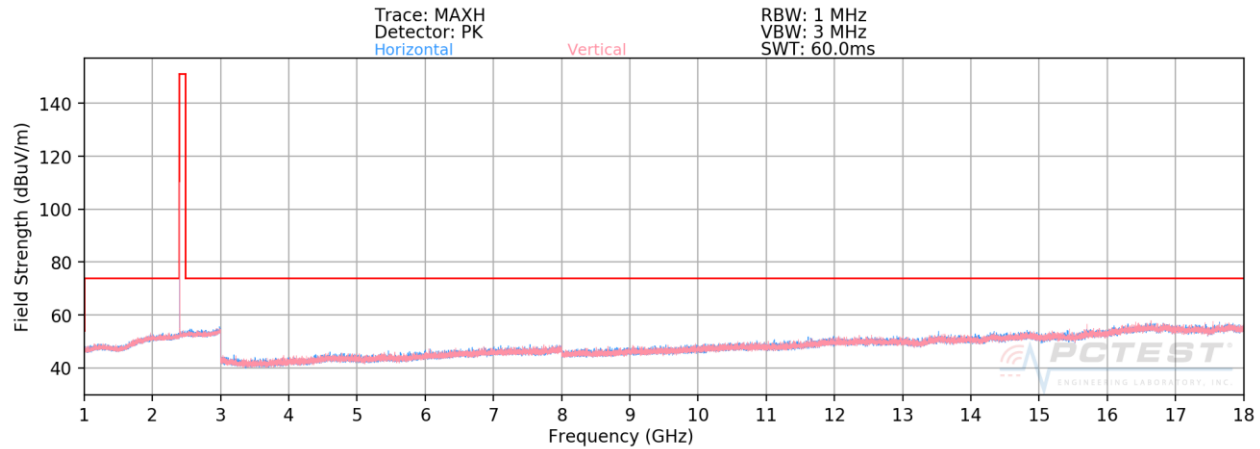

Plot 7-91. Radiated Spurious Plot Above 1GHz ANT 2 (1Mbps, ePA – Ch. 0)

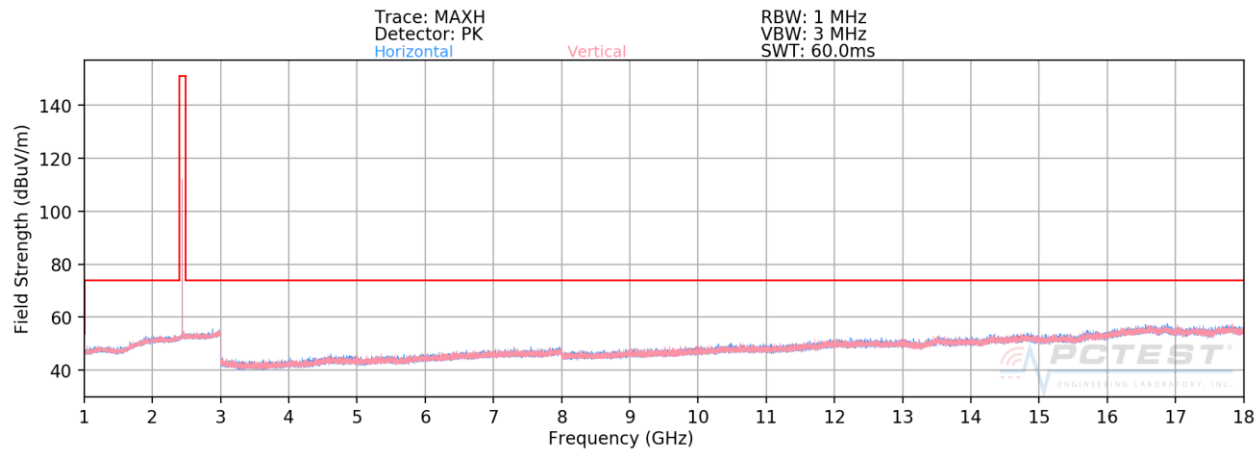

Plot 7-92. Radiated Spurious Plot Above 1GHz ANT 2 (1Mbps, ePA – Ch. 19)

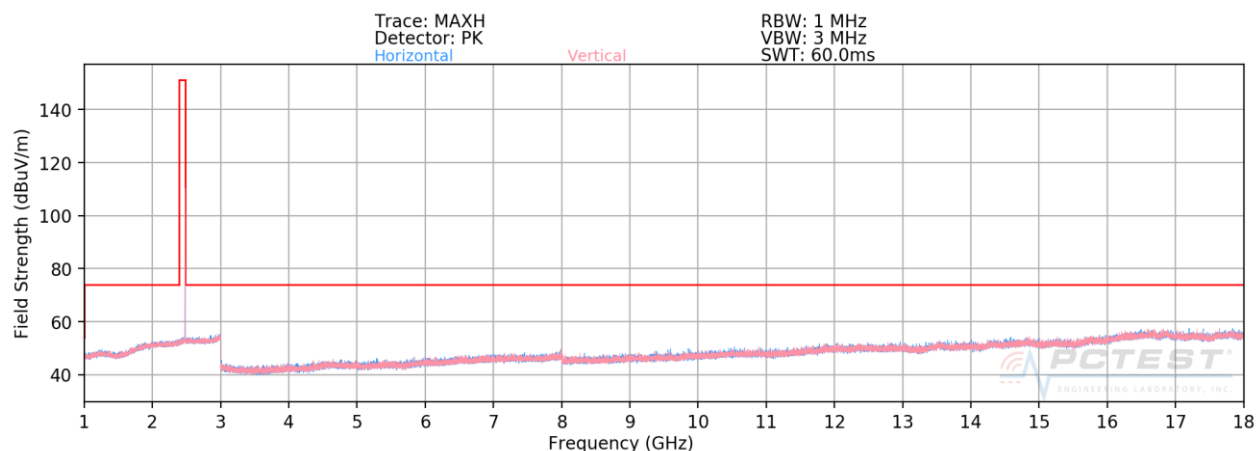


Plot 7-93. Radiated Spurious Plot Above 1GHz ANT 2 (1Mbps, ePA – Ch. 39)


FCC ID: BCGA2126	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 79 of 107

Radiated Spurious Emission Measurements (Above 18GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

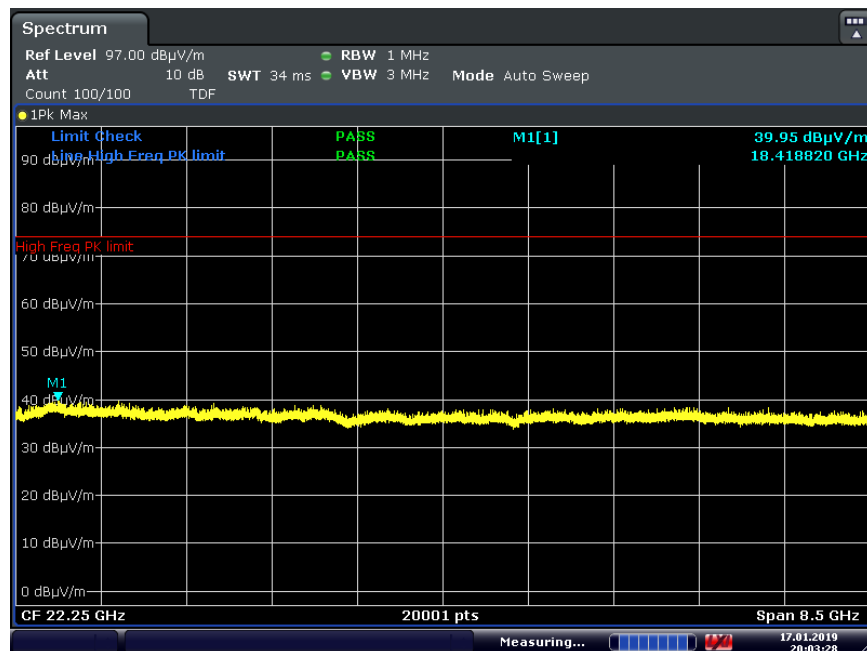

Plot 7-94. Radiated Spurious Plot Above 18GHz ANT 0 (1Mbps, ePA – Ch. 19, Ant. Pol. H)

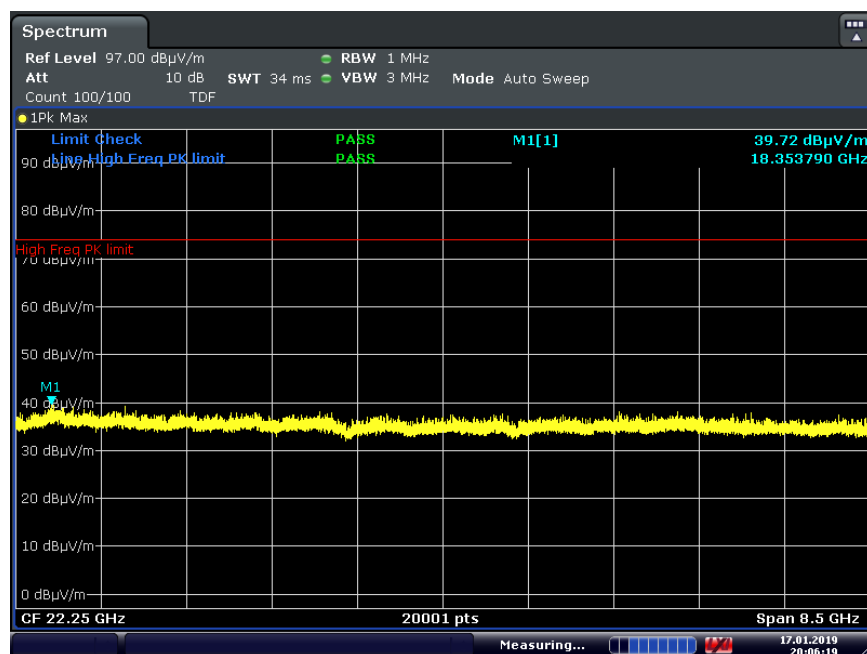

Plot 7-95. Radiated Spurious Plot Above 18GHz ANT 0 (1Mbps, ePA – Ch. 19, Ant. Pol. V)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 80 of 107

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Antenna 0

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	-	-	-78.98	6.00	34.02	53.98	-19.96
4804.00	Peak	H	-	-	-67.54	6.00	45.46	73.98	-28.52
12010.00	Avg	H	-	-	-82.70	15.14	39.44	53.98	-14.54
12010.00	Peak	H	-	-	-71.61	15.14	50.53	73.98	-23.45

Table 7-16. Radiated Measurements @ 3 meters

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2440MHz
 Channel: 19

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	H	-	-	-79.01	6.11	34.10	53.98	-19.88
4880.00	Peak	H	-	-	-67.90	6.11	45.21	73.98	-28.77
7320.00	Avg	H	-	-	-79.67	8.52	35.85	53.98	-18.13
7320.00	Peak	H	-	-	-68.16	8.52	47.36	73.98	-26.62
12200.00	Avg	H	-	-	-82.16	14.88	39.72	53.98	-14.26
12200.00	Peak	H	-	-	-71.26	14.88	50.62	73.98	-23.36

Table 7-17. Radiated Measurements @ 3 meters

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 81 of 107

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	-	-	-79.04	6.12	34.08	53.98	-19.90
4960.00	Peak	H	-	-	-68.09	6.12	45.03	73.98	-28.95
7440.00	Avg	H	-	-	-79.86	8.97	36.11	53.98	-17.87
7440.00	Peak	H	-	-	-68.43	8.97	47.54	73.98	-26.44
12400.00	Avg	H	-	-	-83.16	15.91	39.75	53.98	-14.23
12400.00	Peak	H	-	-	-72.15	15.91	50.76	73.98	-23.22

Table 7-18. Radiated Measurements @ 3 meters

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 82 of 107

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Antenna 1

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	V	-	-	-78.98	6.00	34.02	53.98	-19.96
4804.00	Peak	V	-	-	-67.43	6.00	45.57	73.98	-28.41
12010.00	Avg	V	-	-	-82.58	15.14	39.56	53.98	-14.42
12010.00	Peak	V	-	-	-70.89	15.14	51.25	73.98	-22.73

Table 7-19. Radiated Measurements @ 3 meters

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2440MHz
 Channel: 19

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	H	354	58	-78.92	6.11	34.19	53.98	-19.79
4880.00	Peak	H	354	58	-67.70	6.11	45.41	73.98	-28.57
7320.00	Avg	H	269	159	-79.56	8.52	35.96	53.98	-18.02
7320.00	Peak	H	269	159	-67.96	8.52	47.56	73.98	-26.42
12200.00	Avg	H	-	-	-82.04	14.88	39.84	53.98	-14.14
12200.00	Peak	H	-	-	-70.22	14.88	51.66	73.98	-22.32

Table 7-20. Radiated Measurements @ 3 meters

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 83 of 107

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	V	315	247	-79.01	6.12	34.11	53.98	-19.87
4960.00	Peak	V	315	247	-67.66	6.12	45.46	73.98	-28.52
7440.00	Avg	V	-	-	-79.58	8.97	36.39	53.98	-17.59
7440.00	Peak	V	-	-	-68.24	8.97	47.73	73.98	-26.25
12400.00	Avg	V	-	-	-83.03	15.91	39.88	53.98	-14.10
12400.00	Peak	V	-	-	-71.69	15.91	51.22	73.98	-22.76

Table 7-21. Radiated Measurements @ 3 meters

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 84 of 107

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Antenna 2

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	-	-	-78.92	6.00	34.08	53.98	-19.90
4804.00	Peak	H	-	-	-67.01	6.00	45.99	73.98	-27.99
12010.00	Avg	H	-	-	-82.57	15.14	39.57	53.98	-14.41
12010.00	Peak	H	-	-	-71.30	15.14	50.84	73.98	-23.14

Table 7-22. Radiated Measurements @ 3 meters

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2440MHz
 Channel: 19

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	H	-	-	-79.28	6.11	33.83	53.98	-20.15
4880.00	Peak	H	-	-	-67.62	6.11	45.49	73.98	-28.49
7320.00	Avg	H	-	-	-79.52	8.52	36.00	53.98	-17.98
7320.00	Peak	H	-	-	-67.47	8.52	48.05	73.98	-25.93
12200.00	Avg	H	-	-	-82.02	14.88	39.86	53.98	-14.12
12200.00	Peak	H	-	-	-70.44	14.88	51.44	73.98	-22.54

Table 7-23. Radiated Measurements @ 3 meters

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 85 of 107

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-79.04	6.12	34.08	53.98	-19.90
4960.00	Peak	H	-	-	-67.71	6.12	45.41	73.98	-28.57
7440.00	Avg	H	-	-	-79.85	8.97	36.12	53.98	-17.86
7440.00	Peak	H	-	-	-67.73	8.97	48.24	73.98	-25.74
12400.00	Avg	H	-	-	-82.92	15.91	39.99	53.98	-13.99
12400.00	Peak	H	-	-	-71.76	15.91	51.15	73.98	-22.83

Table 7-24. Radiated Measurements @ 3 meters

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 86 of 107

7.8 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Bluetooth Mode:	LE
Modulation:	GFSK
Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

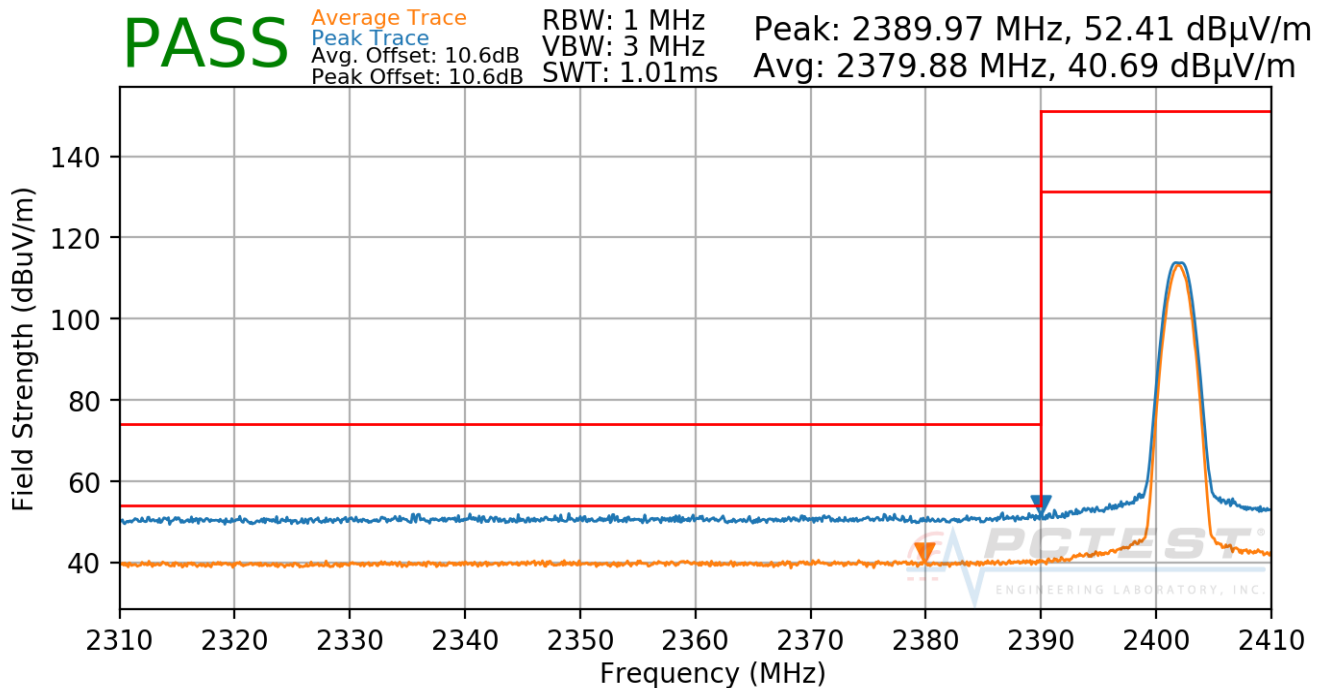

Plot 7-96. Radiated Restricted Lower Band Edge Measurement ANT 0 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 87 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 2 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2402MHz

Channel: 0

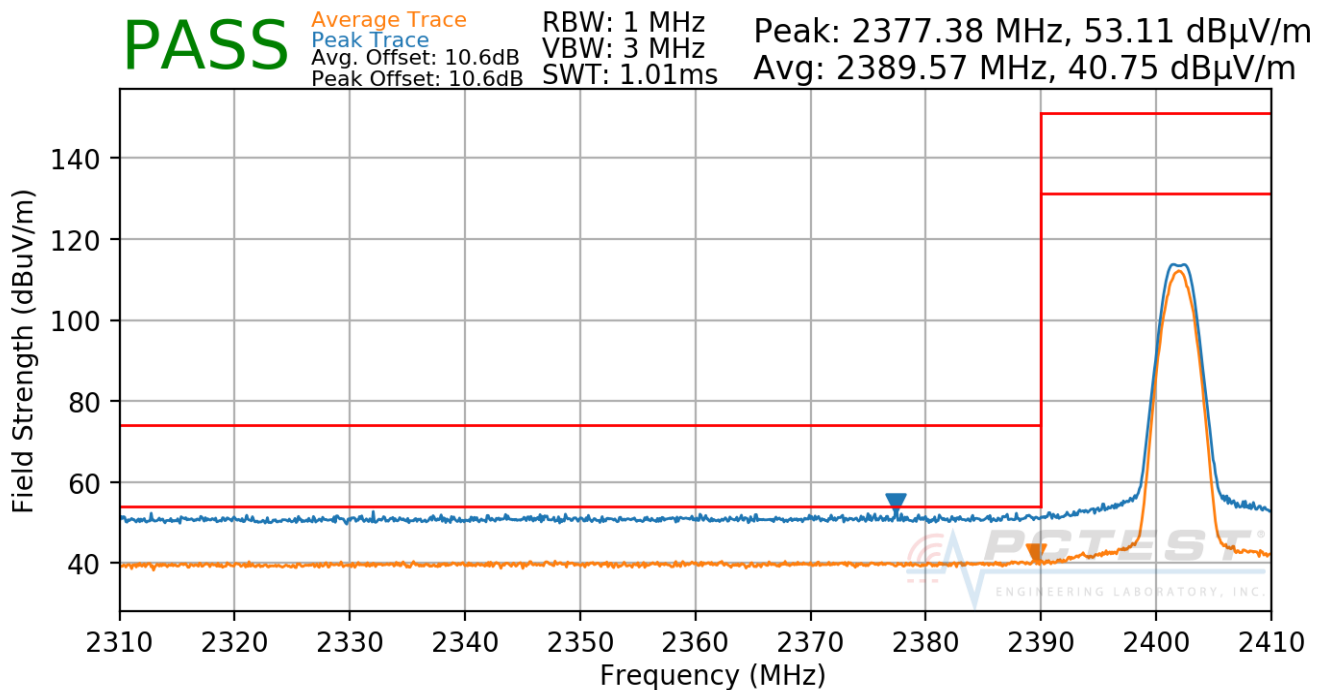

Plot 7-97. Radiated Restricted Lower Band Edge Measurement ANT 0 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 88 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 1 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 39

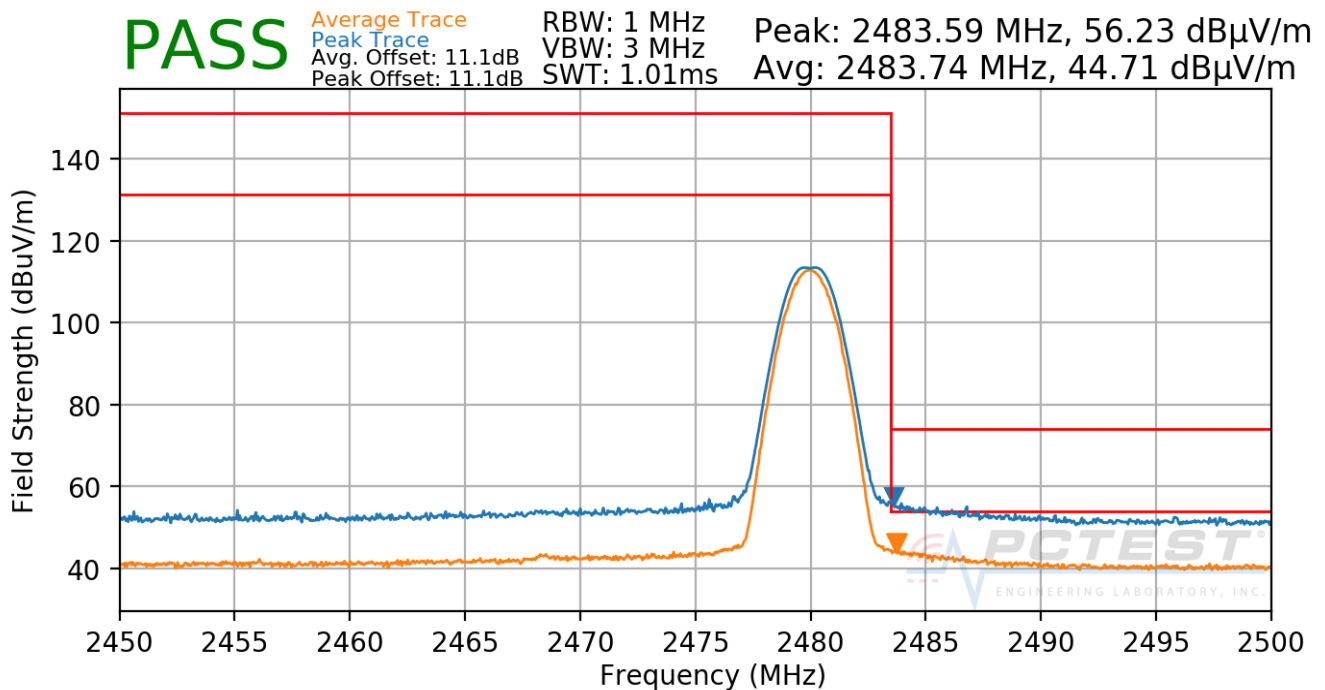

Plot 7-98. Radiated Restricted Upper Band Edge Measurement ANT 0 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 89 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 2 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 39

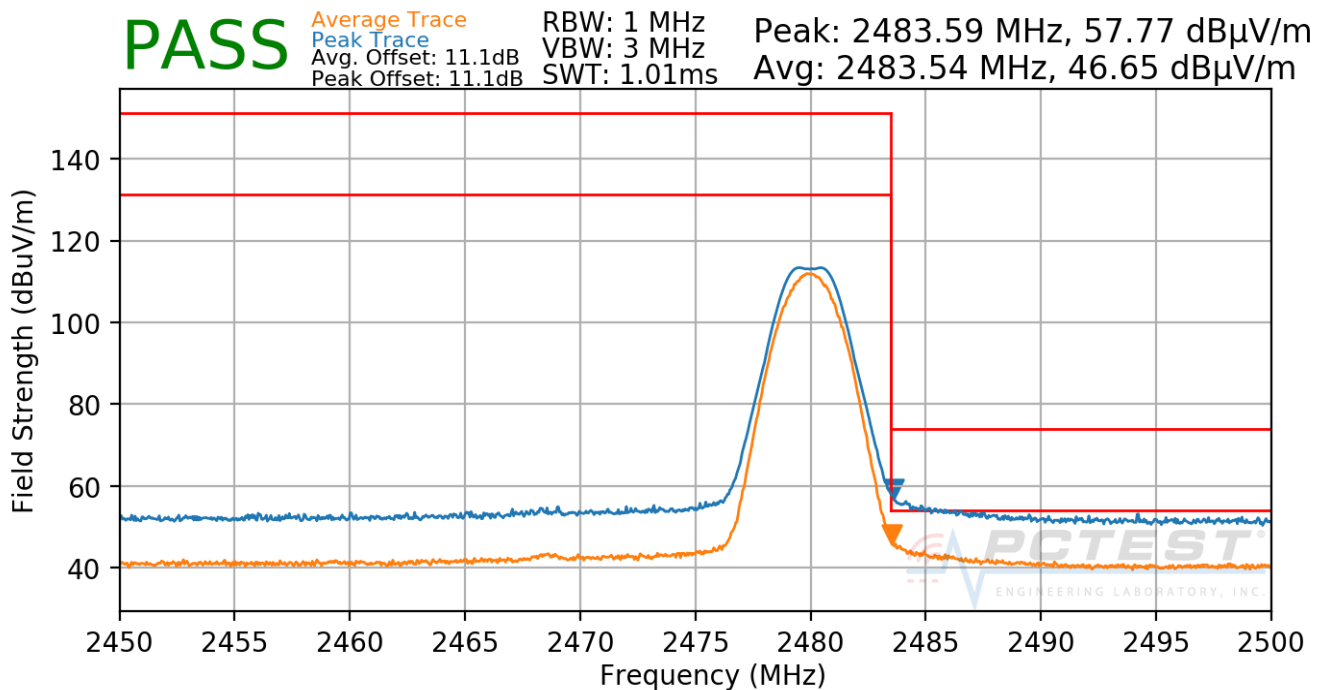

Plot 7-99. Radiated Restricted Upper Band Edge Measurement ANT 0 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 90 of 107

Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Bluetooth Mode:	LE
Modulation:	GFSK
Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

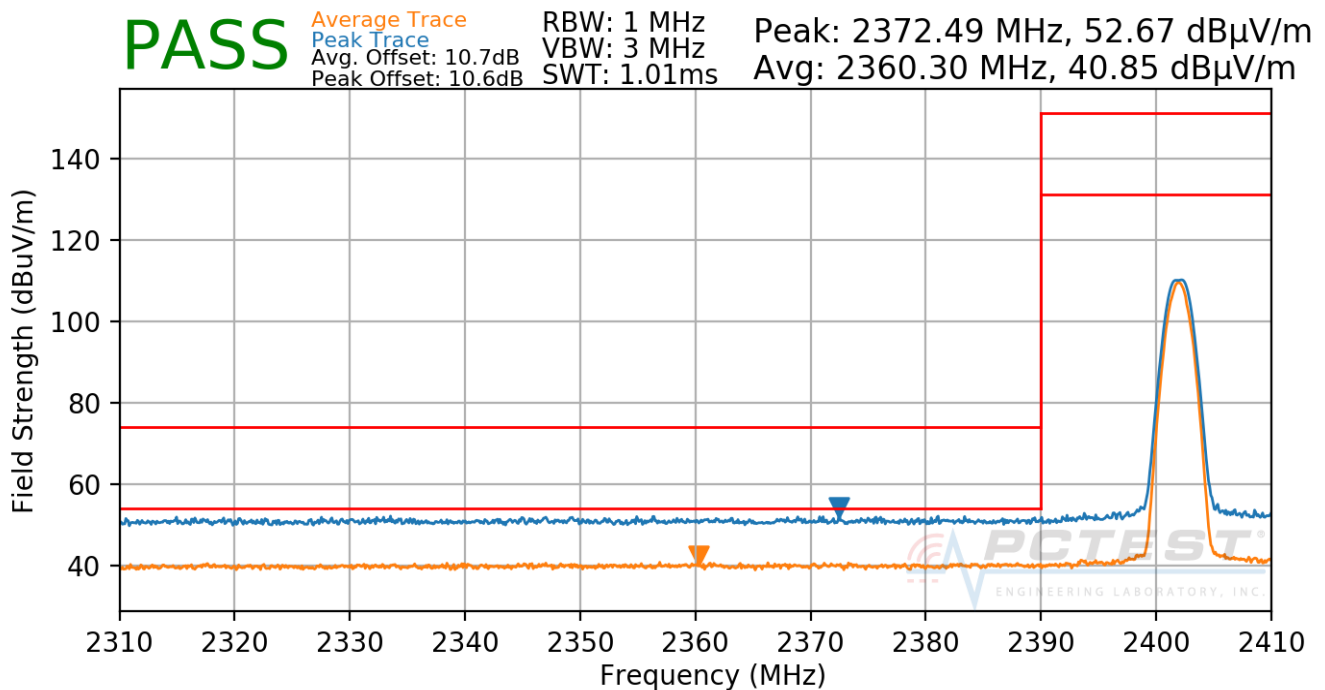

Plot 7-100. Radiated Restricted Lower Band Edge Measurement ANT 1 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 91 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 2 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2402MHz

Channel: 0

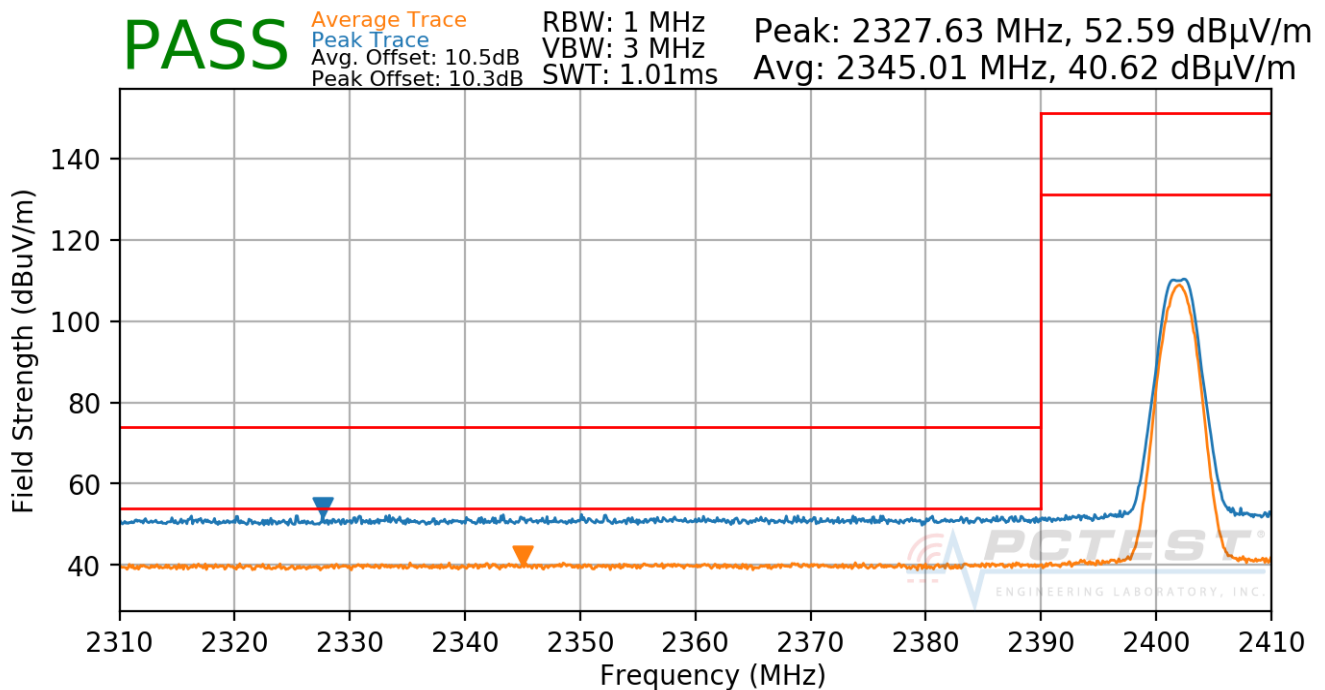

Plot 7-101. Radiated Restricted Lower Band Edge Measurement ANT 1 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 92 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 1 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 39

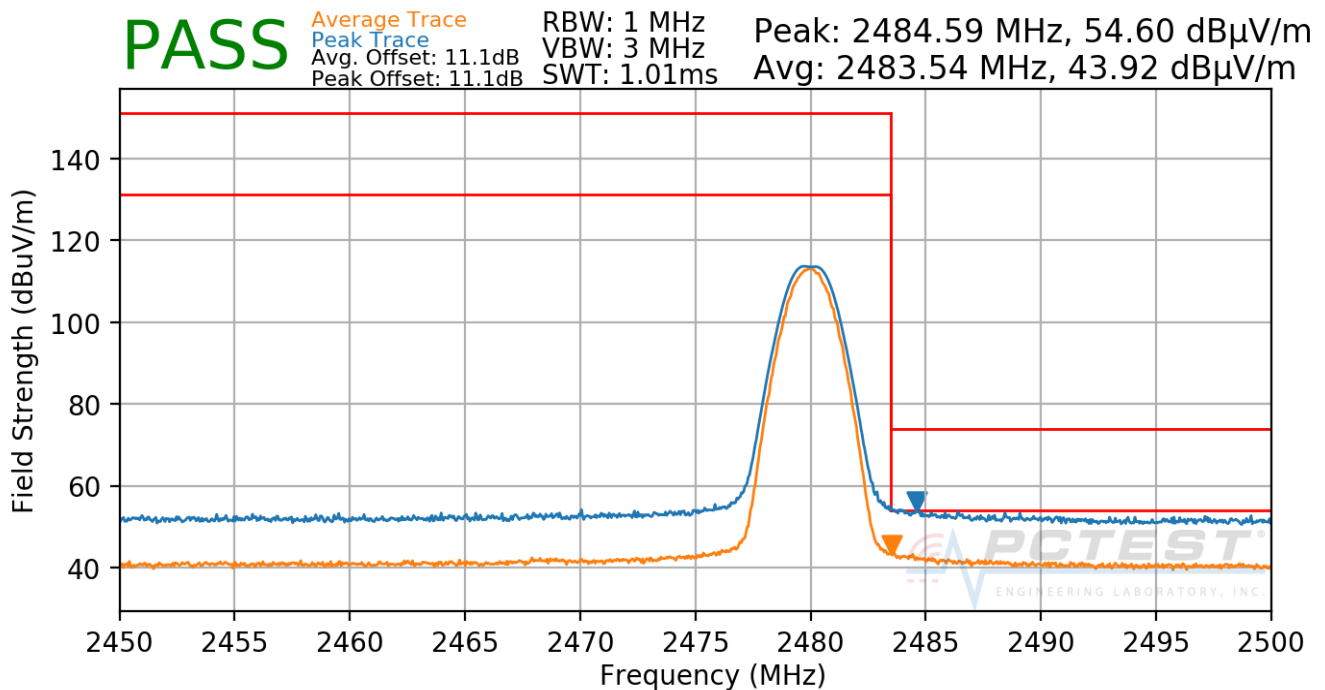

Plot 7-102. Radiated Restricted Upper Band Edge Measurement ANT 1 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 93 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 2 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 39

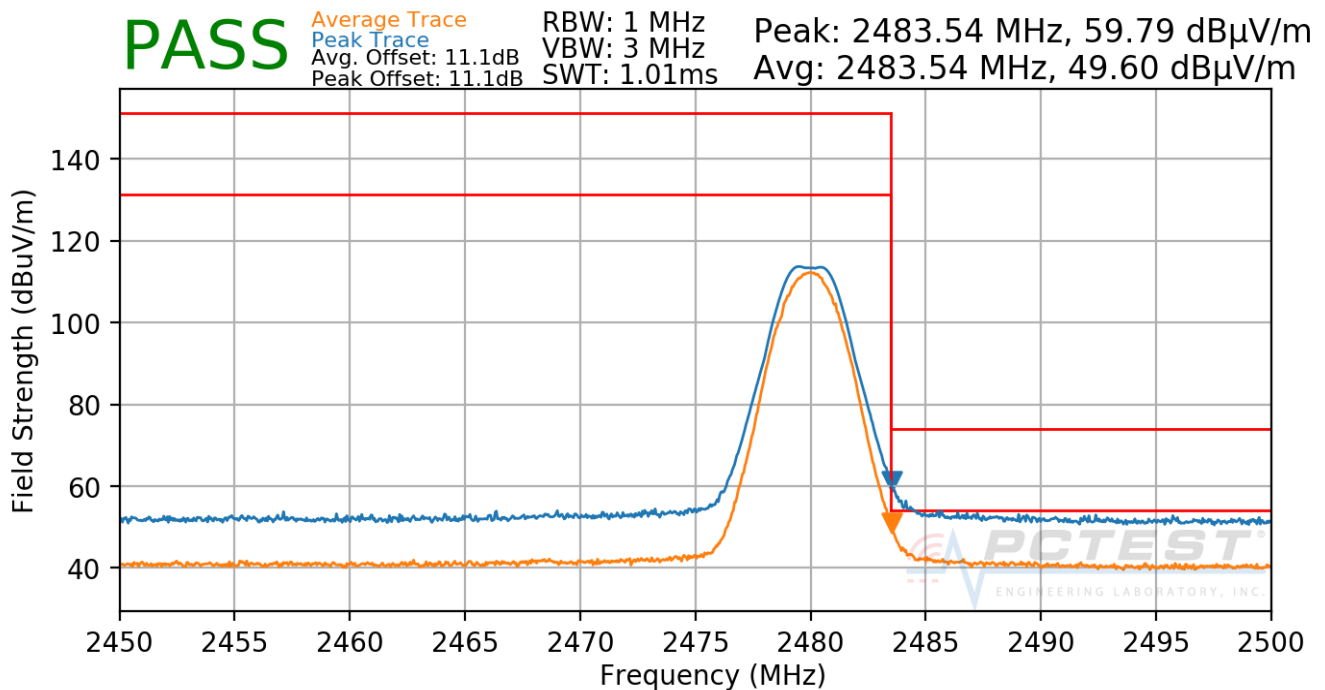

Plot 7-103. Radiated Restricted Upper Band Edge Measurement ANT 1 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 94 of 107

Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Bluetooth Mode:	LE
Modulation:	GFSK
Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

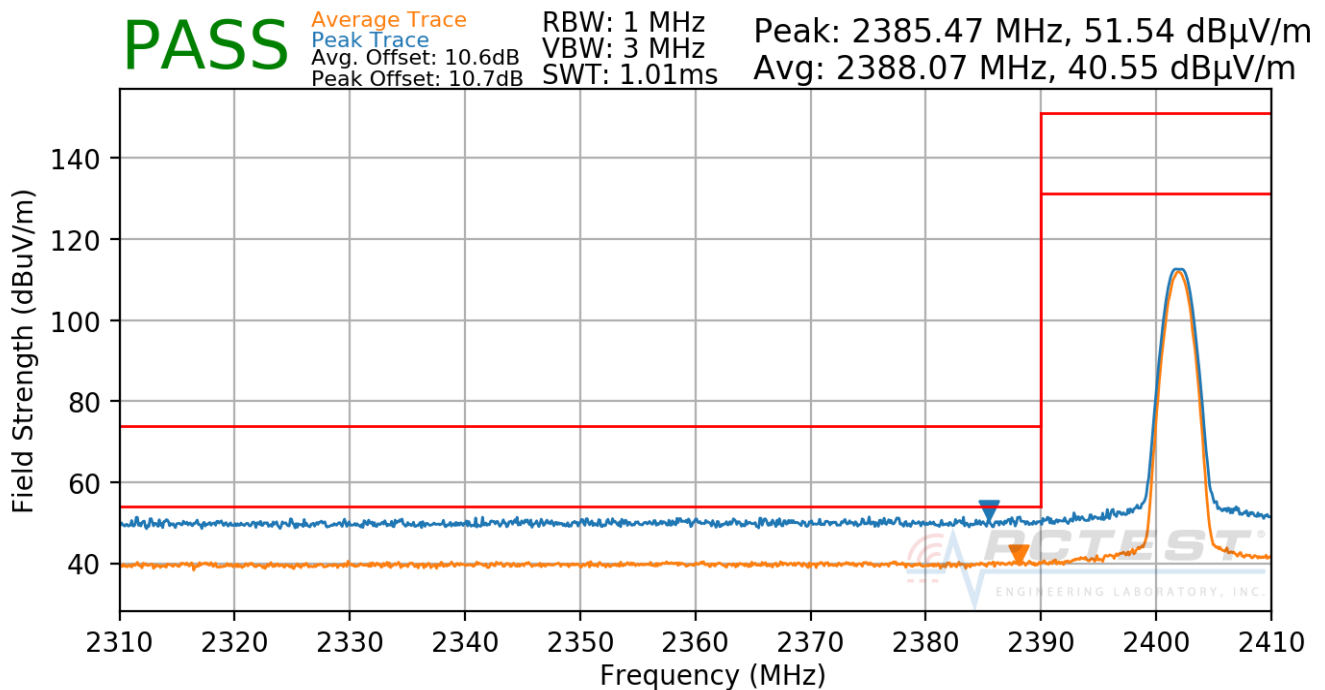

Plot 7-104. Radiated Restricted Lower Band Edge Measurement ANT 2 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 95 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 2 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2402MHz

Channel: 0

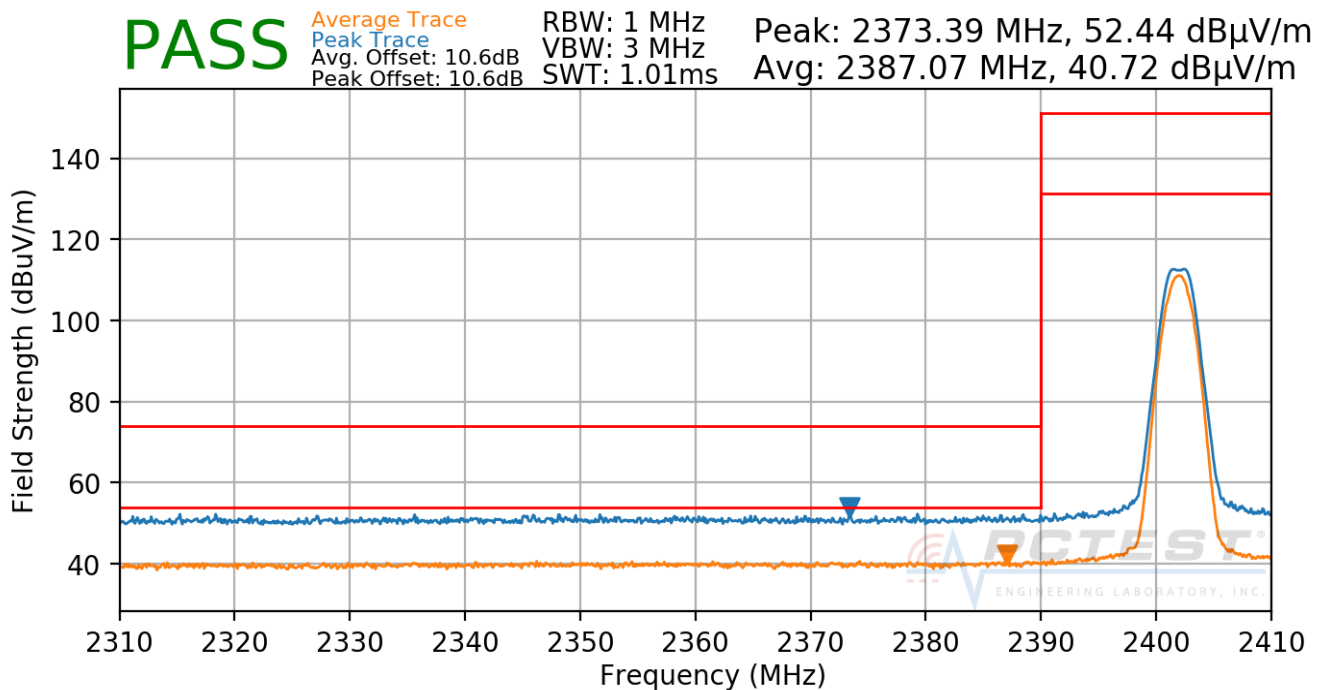

Plot 7-105. Radiated Restricted Lower Band Edge Measurement ANT 2 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 96 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 1 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 39

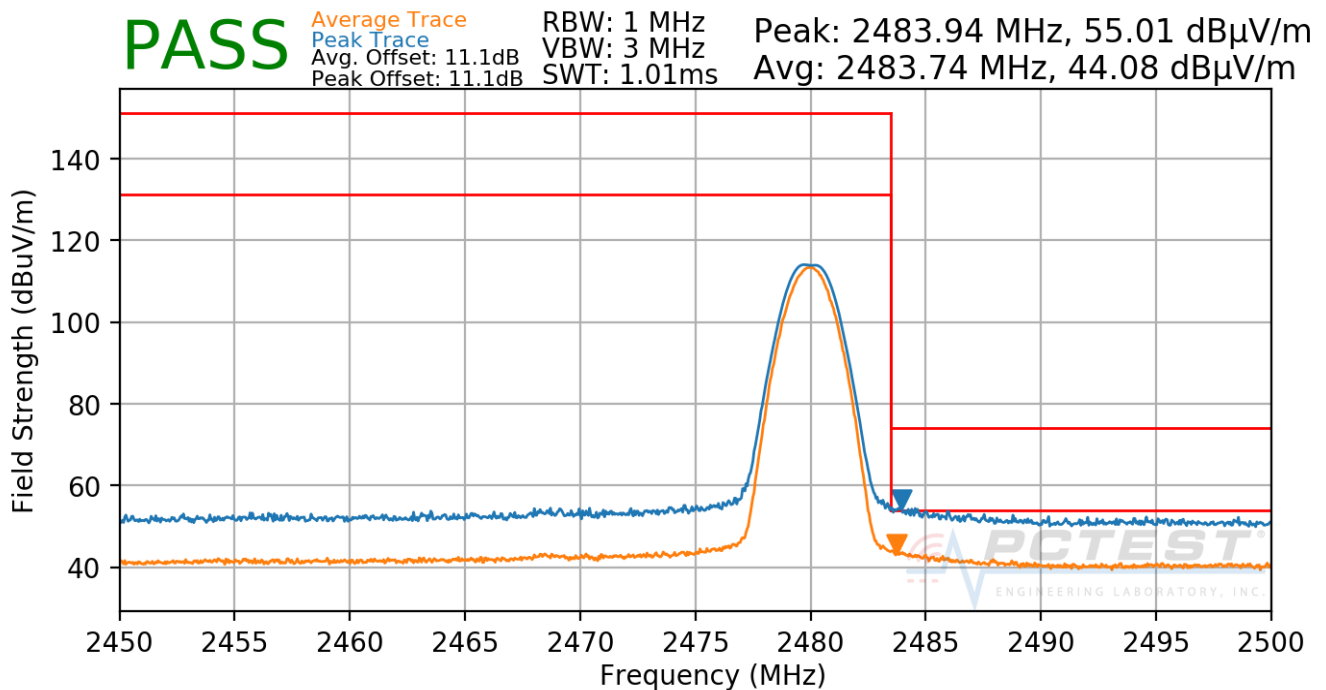

Plot 7-106. Radiated Restricted Upper Band Edge Measurement ANT 2 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 97 of 107

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: LE


Modulation: GFSK

Data Rate: 2 Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 39

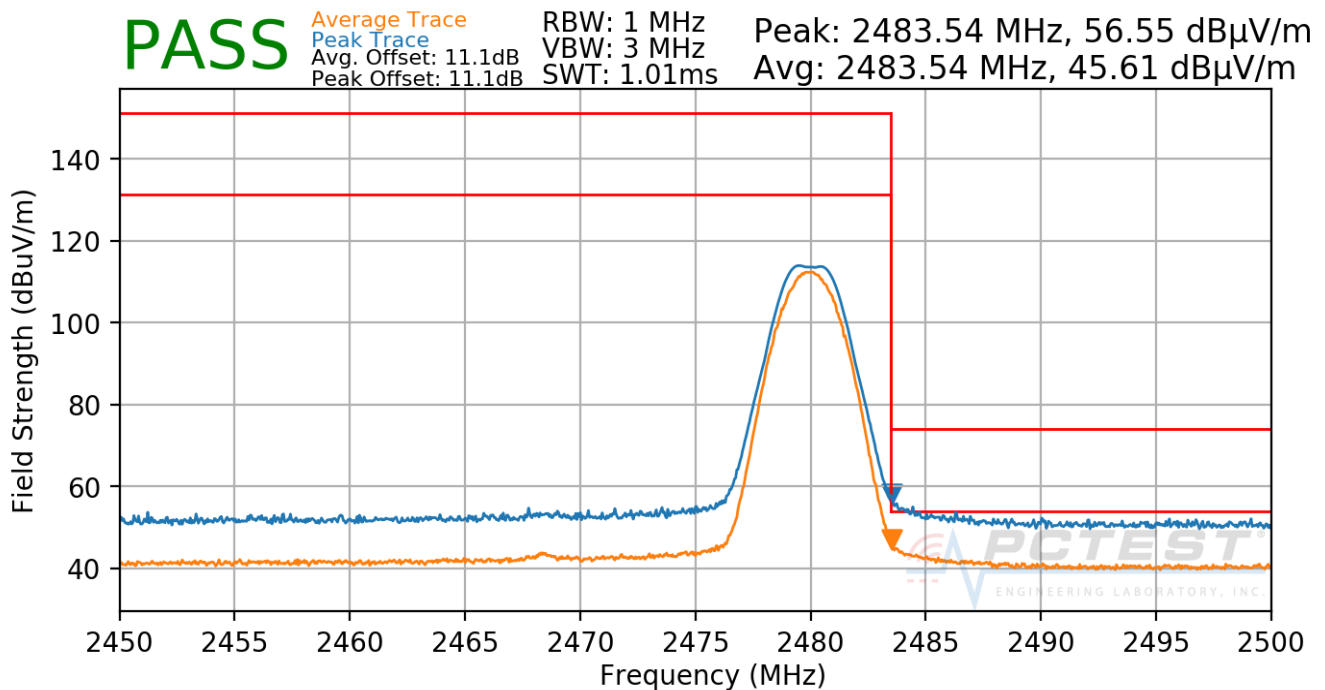

Plot 7-107. Radiated Restricted Upper Band Edge Measurement ANT 2 (Average & Peak)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 98 of 107

7.9 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-25 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2126		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 99 of 107

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

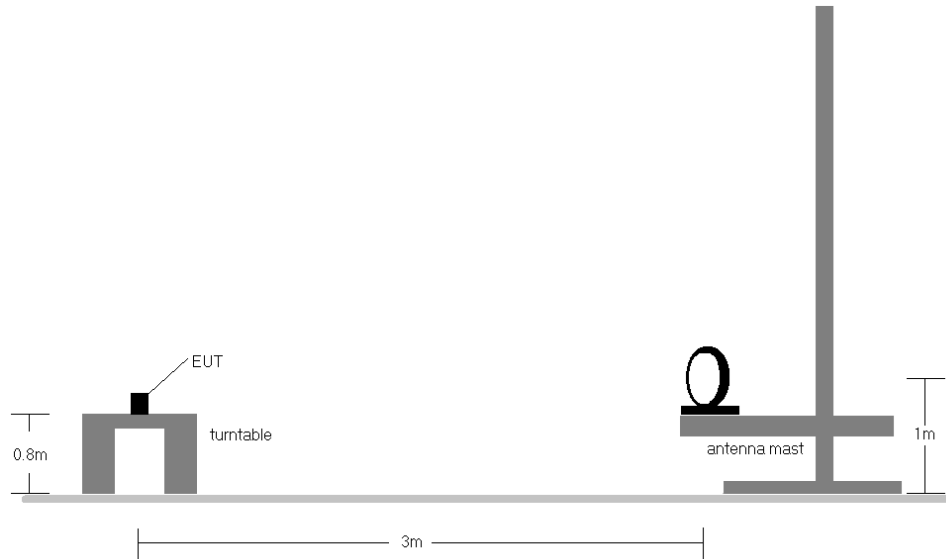


Figure 7-7. Radiated Test Setup < 30Mhz

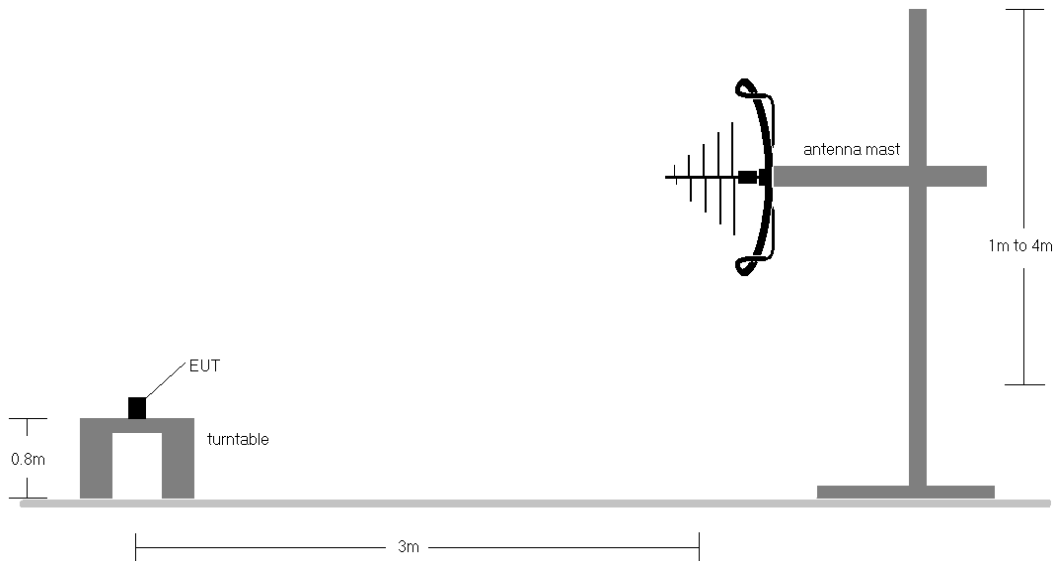



Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 100 of 107

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions within 6dB. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
10. The unit was tested with all possible mode and power schemes and only the highest emission is reported.

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 101 of 107

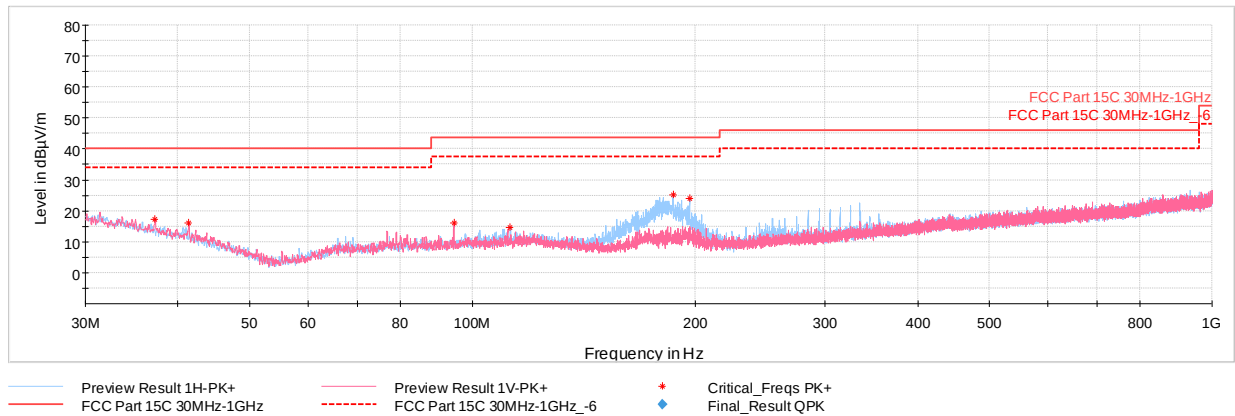

Plot 7-108. Radiated Spurious Plot below 1GHz (1Mbps, ePA – Ch.39, Pol. H & V, with Laptop)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
37.28	Max Peak	V	100	171	-80.95	-8.85	17.20	40.00	-22.80
41.40	Max Peak	V	100	166	-79.81	-11.15	16.04	40.00	-23.96
94.46	Max Peak	V	100	334	-77.63	-13.33	16.04	43.52	-27.48
112.60	Max Peak	H	250	156	-80.43	-12.01	14.56	43.52	-28.96
186.80	Max Peak	H	100	220	-68.01	-13.90	25.09	43.52	-18.43
196.65	Max Peak	H	100	57	-69.48	-13.63	23.89	43.52	-19.63

Table 7-26. Radiated Spurious Emissions Below 1GHz (1Mbps, ePA – Ch.39, with Laptop)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 102 of 107

7.10 AC Line Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-27. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

- Analyzer center frequency was set to the frequency of the spurious emission of interest
- RBW = 9kHz (for emissions from 150kHz – 30MHz)
- Detector = quasi-peak
- Sweep time = auto couple
- Trace mode = max hold
- Trace was allowed to stabilize

Average Field Strength Measurements

- Analyzer center frequency was set to the frequency of the spurious emission of interest
- RBW = 9kHz (for emissions from 150kHz – 30MHz)
- Detector = RMS
- Sweep time = auto couple
- Trace mode = max hold
- Trace was allowed to stabilize

FCC ID: BCGA2126	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 103 of 107

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


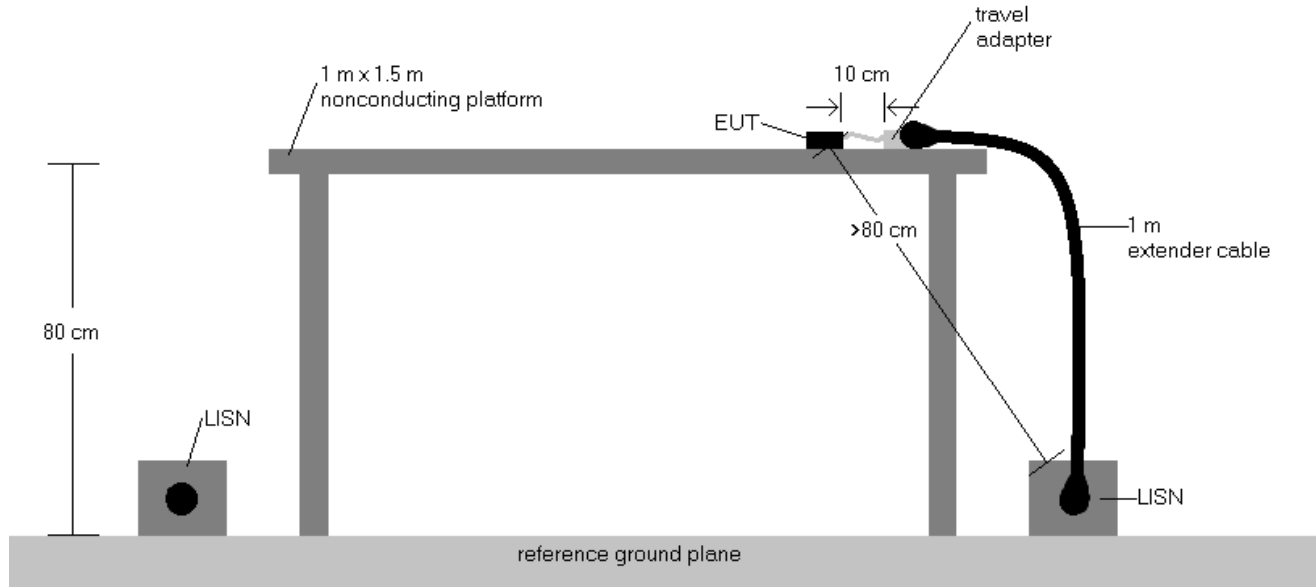


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.


FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 104 of 107

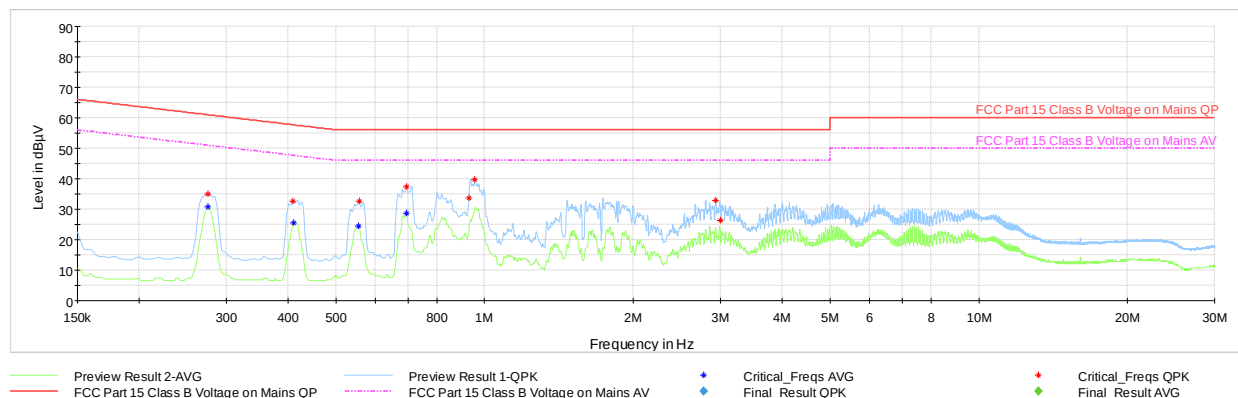

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.276	FINAL	—	30.71	50.94	-20.22	L1	GND
0.276	FINAL	34.9	—	60.94	-26.04	L1	GND
0.409	FINAL	32.7	—	57.67	-25.02	L1	GND
0.411	FINAL	—	25.55	47.63	-22.07	L1	GND
0.555	FINAL	—	24.43	46.00	-21.57	L1	GND
0.557	FINAL	32.6	—	56.00	-23.36	L1	GND
0.695	FINAL	—	28.79	46.00	-17.21	L1	GND
0.695	FINAL	37.2	—	56.00	-18.76	L1	GND
0.929	FINAL	33.6	—	56.00	-22.40	L1	GND
0.956	FINAL	39.8	—	56.00	-16.23	L1	GND
2.936	FINAL	32.9	—	56.00	-23.12	L1	GND
3.005	FINAL	26.3	—	56.00	-29.68	L1	GND

Table 7-28. Line Conducted Measurements with Bluetooth LE (L1, with AC/DC Adapter)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 105 of 107

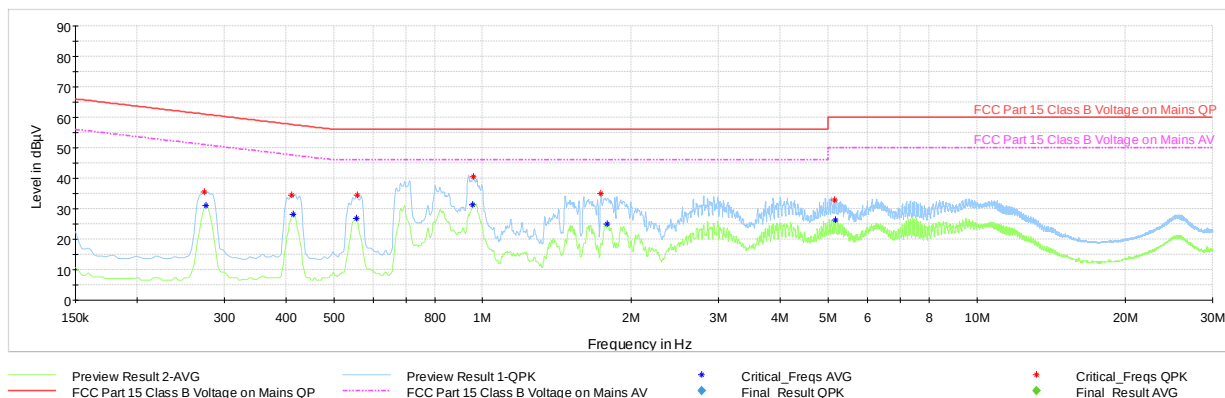

Plot 7-110. Line Conducted Plot with Bluetooth LE (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.274	FINAL	35.4	—	61.00	-25.60	N	GND
0.276	FINAL	—	31.01	50.94	-19.92	N	GND
0.411	FINAL	34.4	—	57.63	-23.24	N	GND
0.413	FINAL	—	28.20	47.58	-19.38	N	GND
0.555	FINAL	—	26.80	46.00	-19.20	N	GND
0.557	FINAL	34.6	—	56.00	-21.40	N	GND
0.953	FINAL	—	31.31	46.00	-14.69	N	GND
0.958	FINAL	40.5	—	56.00	-15.46	N	GND
1.736	FINAL	35.0	—	56.00	-21.03	N	GND
1.786	FINAL	—	24.98	46.00	-21.02	N	GND
5.161	FINAL	32.9	—	60.00	-27.07	N	GND
5.165	FINAL	—	26.20	50.00	-23.80	N	GND

Table 7-29. Line Conducted Measurements with Bluetooth LE (N, with AC/DC Adapter)

FCC ID: BCGA2126	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device		Page 106 of 107

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2126** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2126		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080026-07-R1.BCG	Test Dates: 12/19/2018-02/01/2019	EUT Type: Tablet Device	Page 107 of 107