



SAR EVALUATION REPORT

Applicant Name:
Apple Inc.
One Apple Park Way
Cupertino, CA 95014

Date of Testing:
12/18/2019 – 01/19/2020
Test Site/Location:
PCTEST Lab, Morgan Hill, CA, USA
Document Serial No.:
1C1912170053-01-R1.BCG

FCC ID: BCGA2229
APPLICANT: APPLE, INC.

DUT Type: Tablet Device
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: A2229

Equipment Class	Band & Mode	Tx Frequency	SAR
			1g Body (W/kg)
DTS	2.4 GHz WLAN	2412 - 2472 MHz	1.19
NII	U-NII-1	5180 - 5240 MHz	1.13
NII	U-NII-2A	5260 - 5320 MHz	N/A
NII	U-NII-2C	5500 - 5720 MHz	1.19
NII	U-NII-3	5745 - 5825 MHz	1.14
DSS/DTS	Bluetooth	2402 - 2480 MHz	1.13
Simultaneous SAR per KDB 690783 D01v01r03:			1.36

Note: This revised Test Report (S/N: 1C1912170053-01-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device
		Page 1 of 44

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	INTRODUCTION	10
3	DOSIMETRIC ASSESSMENT	11
4	TEST CONFIGURATION POSITIONS.....	12
5	RF EXPOSURE LIMITS	13
6	FCC MEASUREMENT PROCEDURES.....	14
7	RF CONDUCTED POWERS.....	17
8	SYSTEM VERIFICATION.....	28
9	SAR DATA SUMMARY	30
10	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	35
11	SAR MEASUREMENT VARIABILITY	39
12	EQUIPMENT LIST.....	40
13	MEASUREMENT UNCERTAINTIES.....	41
14	CONCLUSION.....	42
15	REFERENCES	43
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: SAR TISSUE SPECIFICATIONS		
APPENDIX D: SAR SYSTEM VALIDATION		
APPENDIX E: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX F: IEEE 802.11AX RU SAR EXCLUSION		
APPENDIX G: PROBE AND DIPOLE CALIBRATION CERTIFICATES		

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 2 of 44

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

Note: Targets for 802.11ax RU operations can be found in Appendix F.

1.3.1 Maximum Output Power

Mode / Band	Channel	IEEE 802.11b (2.4 GHz)		IEEE 802.11g (2.4 GHz)		IEEE 802.11n (2.4 GHz)		IEEE 802.11ax SU (2.4 GHz)	
		Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm) - Antenna WF7	1	16.50	15.00	16.00	14.50	16.00	14.50	13.00	11.50
	2	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	3	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	4	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	5	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	6	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	7	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	8	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	9	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	10	16.50	15.00	15.25	13.75	15.25	13.75	14.00	12.50
	11	16.50	15.00	15.50	14.00	15.50	14.00	11.50	10.00
	12	15.00	13.50	12.00	10.50	12.00	10.50	8.50	7.00
	13	13.50	12.00	2.50	1.00	2.50	1.00	N/A	N/A

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 3 of 44

Mode / Band		IEEE 802.11b (2.4 GHz)		IEEE 802.11g (2.4 GHz)		IEEE 802.11n (2.4 GHz)		IEEE 802.11ax SU (2.4 GHz)	
	Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm) - Antenna WF8	1	17.50	16.00	14.50	13.00	14.50	13.00	13.00	11.50
	2	17.50	16.00	17.50	16.00	17.50	16.00	16.50	15.00
	3	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	4	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	5	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	6	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	7	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	8	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	9	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	10	17.50	16.00	15.25	13.75	15.25	13.75	14.00	12.50
	11	17.50	16.00	13.00	11.50	13.00	11.50	11.50	10.00
	12	14.00	12.50	9.50	8.00	9.50	8.00	8.50	7.00
	13	12.00	10.50	1.00	-0.50	1.00	-0.50	N/A	N/A

Mode / Band		IEEE 802.11g/n (2.4 GHz)				IEEE 802.11ax SU (2.4 GHz)			
		Antenna WF7		Antenna WF8		Antenna WF7		Antenna WF8	
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum
Modulated Average - MIMO (dBm)	20 MHz Bandwidth	1	14.50	13.00	13.00	11.50	12.00	10.50	12.00
		2	16.50	15.00	17.50	16.00	15.50	14.00	15.50
		3	16.50	15.00	17.50	16.00	16.50	15.00	17.50
		4	16.50	15.00	17.50	16.00	16.50	15.00	17.50
		5	16.50	15.00	17.50	16.00	16.50	15.00	17.50
		6	16.50	15.00	17.50	16.00	16.50	15.00	17.50
		7	16.50	15.00	17.50	16.00	16.50	15.00	17.50
		8	16.50	15.00	17.50	16.00	16.50	15.00	17.50
		9	16.50	15.00	17.50	16.00	16.50	15.00	17.50
		10	14.50	13.00	14.50	13.00	13.00	11.50	13.00
		11	12.50	11.00	12.50	11.00	10.50	9.00	10.50
		12	7.00	5.50	7.00	5.50	6.50	5.00	6.50
		13	0.00	-1.50	0.00	-1.50	N/A	N/A	N/A

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Mode/Band		Modulated Average - Single Tx Chain (dBm) - Antenna WF7
Bluetooth BDR/LE	Maximum	17.00
	Nominal	15.50
Bluetooth EDR	Maximum	15.00
	Nominal	13.50
Bluetooth HDR	Maximum	12.00
	Nominal	10.50

Mode/Band		Modulated Average - Single Tx Chain (dBm) - Antenna WF8
Bluetooth BDR/LE	Maximum	18.00
	Nominal	16.50
Bluetooth EDR	Maximum	15.00
	Nominal	13.50
Bluetooth HDR	Maximum	12.00
	Nominal	10.50

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 4 of 44

Mode/Band			Modulated Average - 2 Tx Chain (dBm) - MIMO
Bluetooth BDR/LE	Antenna WF7	Maximum	16.50
		Nominal	15.00
	Antenna WF8	Maximum	16.50
		Nominal	15.00
Bluetooth EDR	Antenna WF7	Maximum	14.50
		Nominal	13.00
	Antenna WF8	Maximum	14.50
		Nominal	13.00
Bluetooth HDR	Antenna WF7	Maximum	12.00
		Nominal	10.50
	Antenna WF8	Maximum	12.00
		Nominal	10.50

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Mode / Band		IEEE 802.11a (5 GHz)		IEEE 802.11n (5 GHz)		IEEE 802.11ac (5 GHz)		IEEE 802.11ax SU (5 GHz)	
	Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm) - 5GHz ANTower	36	17.50	16.00	17.50	16.00	17.50	16.00	16.00	14.50
	40	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	44	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	48	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
	52	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
	56	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
	60	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
	64	15.75	14.25	15.75	14.25	15.75	14.25	14.50	13.00
	100	15.75	14.25	15.75	14.25	15.75	14.25	15.00	13.50
	104	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	108	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	112	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	116	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	120	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	124	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	128	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	132	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	136	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	140	15.50	14.00	15.50	14.00	15.50	14.00	12.50	11.00
	144	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
	149	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50
	153	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50
	157	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50
	161	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50
	165	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50
	38			14.50	13.00	14.50	13.00	13.00	11.50
	46			17.50	16.00	17.50	16.00	17.50	16.00
	54			16.25	14.75	16.25	14.75	16.25	14.75
	62			13.50	12.00	13.50	12.00	12.00	10.50
	102			14.50	13.00	14.50	13.00	11.50	10.00
	110			15.75	14.25	15.75	14.25	15.75	14.25
	118			15.75	14.25	15.75	14.25	15.75	14.25
	126			15.75	14.25	15.75	14.25	15.75	14.25
	134			15.75	14.25	15.75	14.25	15.50	14.00
	142			15.75	14.25	15.75	14.25	15.75	14.25
	151			16.00	14.50	16.00	14.50	16.00	14.50
	159			16.00	14.50	16.00	14.50	16.00	14.50
	42					13.50	12.00	12.00	10.50
	58					13.50	12.00	11.00	9.50
	106					13.50	12.00	11.00	9.50
	122					15.75	14.25	15.75	14.25
	138					15.75	14.25	15.75	14.25
	155					16.00	14.50	16.00	14.50

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 5 of 44

Mode / Band		IEEE 802.11a (5 GHz)		IEEE 802.11n (5 GHz)		IEEE 802.11ac (5 GHz)		IEEE 802.11ax SU (5 GHz)		
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm) - 5GHz ANTupper	20 MHz Bandwidth	36	17.00	15.50	17.00	15.50	17.00	15.50	16.00	14.50
		40	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50
		44	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50
		48	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50
		52	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
		56	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
		60	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
		64	15.75	14.25	15.75	14.25	15.75	14.25	14.50	13.00
		100	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		104	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		108	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		112	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		116	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		120	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		124	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		128	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		132	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		136	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		140	15.00	13.50	15.00	13.50	15.00	13.50	12.50	11.00
		144	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		149	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		153	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		157	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		161	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		165	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
	40 MHz Bandwidth	38			14.50	13.00	14.50	13.00	13.00	11.50
		46			17.00	15.50	17.00	15.50	17.00	15.50
		54			16.25	14.75	16.25	14.75	16.25	14.75
		62			13.50	12.00	13.50	12.00	12.00	10.50
		102			14.50	13.00	14.50	13.00	11.50	10.00
		110			15.00	13.50	15.00	13.50	15.00	13.50
		118			15.00	13.50	15.00	13.50	15.00	13.50
		126			15.00	13.50	15.00	13.50	15.00	13.50
		134			15.00	13.50	15.00	13.50	15.00	13.50
		142			15.00	13.50	15.00	13.50	15.00	13.50
		151			16.50	15.00	16.50	15.00	16.50	15.00
		159			16.50	15.00	16.50	15.00	16.50	15.00
	80 MHz Bandwidth	42					13.50	12.00	12.00	10.50
		58					13.50	12.00	11.00	9.50
		106					13.50	12.00	11.00	9.50
		122					15.00	13.50	15.00	13.50
		138					15.00	13.50	15.00	13.50
		155					16.50	15.00	16.50	15.00

Mode / Band		IEEE 802.11a (5 GHz)					IEEE 802.11n (5 GHz)					IEEE 802.11ac (5 GHz)					IEEE 802.11ax SU (5 GHz)								
		5GHz ANTLower		5GHz ANTUpper			5GHz ANTLower		5GHz ANTUpper			5GHz ANTLower		5GHz ANTUpper			5GHz ANTLower		5GHz ANTUpper						
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal			
Modulated Average - MIMO (dBm) 2 Tx CDD	20 MHz Bandwidth	36	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00			
		40	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50			
		44	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50			
		48	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50			
		52	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50			
		56	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50			
		60	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50			
		64	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.75	12.25	13.75	12.25	15.00	13.50		
		100	15.50	14.00	15.00	13.50	15.50	14.00	15.00	13.50	15.50	14.00	15.00	13.50	15.50	14.00	15.00	13.50	14.25	12.75	14.25	12.75	15.00	13.50	
		104	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		108	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		112	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		116	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		120	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		124	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		128	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		132	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		136	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
		140	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	10.50	9.00	10.50	9.00	15.00	13.50	
		144	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.00	13.50	
	149	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50		
	153	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50		
	157	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50		
	161	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50		
	165	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50		
	40 MHz Bandwidth	38							13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50	12.00	10.50	12.00	10.50	15.00	13.50	
		46							17.50	16.00	17.00	15.50	17.50	16.00	17.00	15.50	17.50	16.00	17.00	15.50	17.00	15.50	15.00	13.50	
		54							16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	15.00	13.50	
		62							12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	10.50	9.00	10.50	9.00	15.00	13.50	
		102							12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	10.50	9.00	10.50	9.00	15.00	13.50	
		110							15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	
		118							15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	
		126							15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	
		134							15.50	14.00	15.00	13.50	15.50	14.00	15.00	13.50	15.50	14.00	15.00	13.50	15.50	14.00	15.00	13.50	
		142							15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	
		151							16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	
		159							16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	
	80 MHz Bandwidth	42																12.00	10.50	12.00	10.50	10.50	9.00	10.50	9.00
		58																11.00	9.50	11.00	9.50	10.00	8.50	10.00	8.50
		106																11.00	9.50	11.00	9.50	10.00	8.50	10.00	8.50
122																	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	
138																	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	
155																	16.00	14.50	16.50	15.00	14.00	12.50	14.00	12.50	

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 6 of 44

Mode / Band		IEEE 802.11n (5 GHz)				IEEE 802.11ac (5 GHz)				IEEE 802.11ax SU (5 GHz)				
		5GHz ANTlower		5GHz ANTupper		5GHz ANTlower		5GHz ANTupper		5GHz ANTlower		5GHz ANTupper		
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - MIMO (dBm) 2 Tx SDM	20 MHz Bandwidth	36	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	15.00	13.50	15.00	13.50
		40	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50
		44	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50
		48	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50	17.00	15.50
		52	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
		56	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
		60	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
		64	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50	13.75	12.25	13.75	12.25
		100	15.50	14.00	15.00	13.50	15.50	14.00	15.00	13.50	14.25	12.75	14.25	12.75
		104	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		108	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		112	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		116	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		120	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		124	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		128	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		132	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		136	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		140	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	10.50	9.00	10.50	9.00
		144	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
	149	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	
	153	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	
	157	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	
	161	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	
	165	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	
	40 MHz Bandwidth	38	13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50	12.00	10.50	12.00	10.50
		46	17.50	16.00	17.00	15.50	17.50	16.00	17.00	15.50	17.50	16.00	17.00	15.50
		54	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75
		62	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	10.50	9.00	10.50	9.00
		102	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	10.50	9.00	10.50	9.00
		110	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		118	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		126	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		134	15.50	14.00	15.00	13.50	15.50	14.00	15.00	13.50	14.00	12.50	14.00	12.50
		142	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
	80 MHz Bandwidth	151	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00
		159	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00	16.00	14.50	16.50	15.00
		42					12.00	10.50	12.00	10.50	10.50	9.00	10.50	9.00
		58					11.00	9.50	11.00	9.50	10.00	8.50	10.00	8.50
		106					11.00	9.50	11.00	9.50	10.00	8.50	10.00	8.50
		122					15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
		138					15.75	14.25	15.00	13.50	15.75	14.25	15.00	13.50
	155					16.00	14.50	16.50	15.00	14.00	12.50	14.00	12.50	

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

1.4 DUT Antenna Locations

The overall diagonal dimension of the device is > 200 mm. A diagram showing the location of the device antennas can be found in Appendix E. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

Table 1-1
Device Edges/Sides for SAR Testing

Device Sides/Edges for SAR Testing						
Mode	Back	Front	Top	Bottom	Right	Left
2.4 GHz WLAN Ant WF7	Yes	No	Yes	No	No	Yes
2.4 GHz WLAN Ant WF8	Yes	No	Yes	No	Yes	No
WLAN 5 GHz ANTlower	Yes	No	No	No	Yes	No
WLAN 5 GHz ANTupper	Yes	No	No	No	Yes	No
Bluetooth Ant WF7	Yes	No	Yes	No	No	Yes
Bluetooth Ant WF8	Yes	No	Yes	No	Yes	No

Note: Per FCC KDB Publication 616217 D04v01r01, particular edges were not required to be evaluated for SAR based on the SAR exclusion threshold in KDB 447498 D01V06. Additional edges may have been evaluated for simultaneous transmission analysis.

FCC ID: BCGA2229	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device		Page 7 of 44

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	2.4 GHz Wi-Fi MIMO	Yes
2	2.4 GHz Bluetooth MIMO	Yes
3	5 GHz Wi-Fi MIMO	Yes
4	2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes
5	2.4 GHz Bluetooth + 5 GHz Wi-Fi MIMO	Yes
6	2.4 GHz Bluetooth MIMO + 5 GHz Wi-Fi	Yes
7	2.4 GHz Bluetooth MIMO + 5 GHz Wi-Fi MIMO	Yes

1. 2.4 GHz WLAN, 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. 2.4 GHz WLAN and 5 GHz WLAN cannot transmit simultaneously.
3. This device supports 2x2 MIMO Tx for WLAN 802.11a/g/n/ac/ax. 802.11a/g/n/ac/ax supports CDD and 802.11n/ac/ax additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.
4. This device supports VOWIFI.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Based on the maximum allowed power for the respective antennas, U-NII-1 was evaluated for 5 GHz ANTlower and 5 GHz ANTupper SAR. Additional testing for U-NII-2A 5 GHz ANTlower and 5 GHz ANTupper SAR was not required since all reported SAR was less than 1.2 W/kg per FCC KDB Publication 248227 D01v02r02.

The WLAN/Bluetooth chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report. WLAN/Bluetooth SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining WLAN/Bluetooth configurations.

This device supports channel 1-13 for 2.4 GHz WLAN. However, because channel 12/13 targets are not higher than that of channels 1-11, channels 1, 6, and 11 were considered for SAR testing per FCC KDB 248227 D01V02r02

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 8 of 44

- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

This device supports IEEE 802.11ax with the following features:

- a) Up to 80 MHz Bandwidth only for 5 GHz
- b) Up to 20 MHz Bandwidth only for 2.4 GHz
- c) No aggregate channel configurations
- d) 2 Tx antenna output
- e) Up to 1024 QAM is supported
- f) TDWR and Band gap channels are supported for 5 GHz
- g) MU-MIMO UL Operations are not supported

Per April 2019 TCB Workshop Notes, SAR testing was not required for 802.11ax when applying the initial test configuration procedures of KDB 248227, with 802.11ax considered a higher order 802.11 mode.

1.7 Guidance Applied

- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01r02 (Tablet)
- April 2019 TCB Workshop Notes (IEEE 802.11ax)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 9.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 9 of 44

2 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 10 of 44

3 DOSIMETRIC ASSESSMENT

3.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 3-1
Sample SAR Area Scan

Table 3-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 11 of 44

4 TEST CONFIGURATION POSITIONS

4.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

4.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 12 of 44

5 RF EXPOSURE LIMITS

5.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 13 of 44

6 FCC MEASUREMENT PROCEDURES

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

6.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

6.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

6.2.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

6.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 14 of 44

6.2.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

6.2.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.2.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 6.2.5).

6.2.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 15 of 44

subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

6.2.8 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is <1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 16 of 44

7 RF CONDUCTED POWERS

7.1 WLAN Conducted Powers

7.1.1 Variant 1

Table 7-1
2.4 GHz WLAN Maximum Average RF Power – Ant WF 7

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	15.65	15.92	15.83
2417	2	N/A	16.31	16.47
2437	6	15.70	16.48	16.50
2457	10	N/A	15.23	15.25
2462	11	15.64	15.41	15.18

Table 7-2
2.4 GHz WLAN Maximum Average RF Power – Ant WF 8

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	16.50	14.50	14.48
2417	2	N/A	17.49	17.50
2437	6	16.54	17.40	17.49
2457	10	N/A	15.25	15.20
2462	11	16.62	12.94	12.95

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 17 of 44

Table 7-3
5 GHz WLAN Maximum Average RF Power – 5 GHz ANTlower

5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	13.57	13.55
5230	46	16.54	16.79
5270	54	15.33	15.43
5310	62	12.60	12.52

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11ac	
		Average	
5530	106	12.52	
5610	122	14.86	
5690	138	14.90	
5775	155	15.00	

Table 7-4
5 GHz WLAN Maximum Average RF Power – 5 GHz ANTupper

5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	13.50	13.44
5230	46	16.04	16.16
5270	54	15.27	15.21
5310	62	12.50	12.56

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11ac	
		Average	
5530	106	12.52	
5610	122	14.13	
5690	138	14.00	
5775	155	15.80	

FCC ID: BCGA2229	 PCTEST	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 18 of 44

7.1.2 Variant 2

Table 7-5
2.4 GHz WLAN Maximum Average RF Power – Ant WF 7

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	15.71	15.98	15.88
2417	2	N/A	16.48	16.43
2437	6	15.60	16.47	16.46
2457	10	N/A	15.17	15.17
2462	11	15.68	15.42	15.43

Table 7-6
2.4 GHz WLAN Maximum Average RF Power – Ant WF 8

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	16.36	14.45	14.47
2417	2	N/A	17.39	17.41
2437	6	16.36	17.45	17.42
2457	10	N/A	15.18	15.23
2462	11	16.35	12.96	12.85

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 19 of 44

Table 7-7
5 GHz WLAN Maximum Average RF Power – 5 GHz ANTlower

5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	13.70	13.54
5230	46	16.59	16.57
5270	54	15.28	15.56
5310	62	12.53	12.49

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11ac	
		Average	
5530	106	12.51	
5610	122	14.79	
5690	138	14.77	
5775	155	15.15	

Table 7-8
5 GHz WLAN Maximum Average RF Power – 5 GHz ANTupper

5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	13.71	13.74
5230	46	16.07	15.98
5270	54	15.26	15.11
5310	62	12.67	12.78

5GHz (80MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11ac	
		Average	
5530	106	12.55	
5610	122	14.02	
5690	138	13.86	
5775	155	15.52	

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 20 of 44

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The WLAN chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- WLAN SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining WLAN configurations.

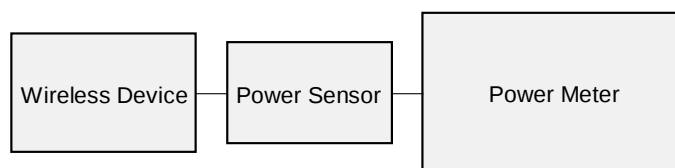


Figure 7-1
Power Measurement Setup

7.2 Bluetooth Conducted Powers

7.2.1 Variant 1

Table 7-9
Maximum Bluetooth Average RF Power – Ant WF 7

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	16.97	49.774
2441	GFSK	1.0	39	16.96	49.659
2480	GFSK	1.0	78	16.85	48.417

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 21 of 44

Table 7-10
Maximum Bluetooth Average RF Power – Ant WF 8

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	17.78	59.979
2441	GFSK	1.0	39	17.60	57.544
2480	GFSK	1.0	78	17.84	60.814

7.2.2 Variant 2

Table 7-11
Maximum Bluetooth Average RF Power – Ant WF 7

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	17.00	50.119
2441	GFSK	1.0	39	16.79	47.753
2480	GFSK	1.0	78	16.88	48.753

Table 7-12
Maximum Bluetooth Average RF Power – Ant WF 8


Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	17.80	60.256
2441	GFSK	1.0	39	18.00	63.096
2480	GFSK	1.0	78	17.81	60.395

FCC ID: BCGA2229	 PCTEST	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device		Page 22 of 44

7.3 Bluetooth Duty Cycle

7.3.1 Maximum Bluetooth Transmission Antenna WF 7 Variant 1

Figure 7-2
Bluetooth Transmission Plot

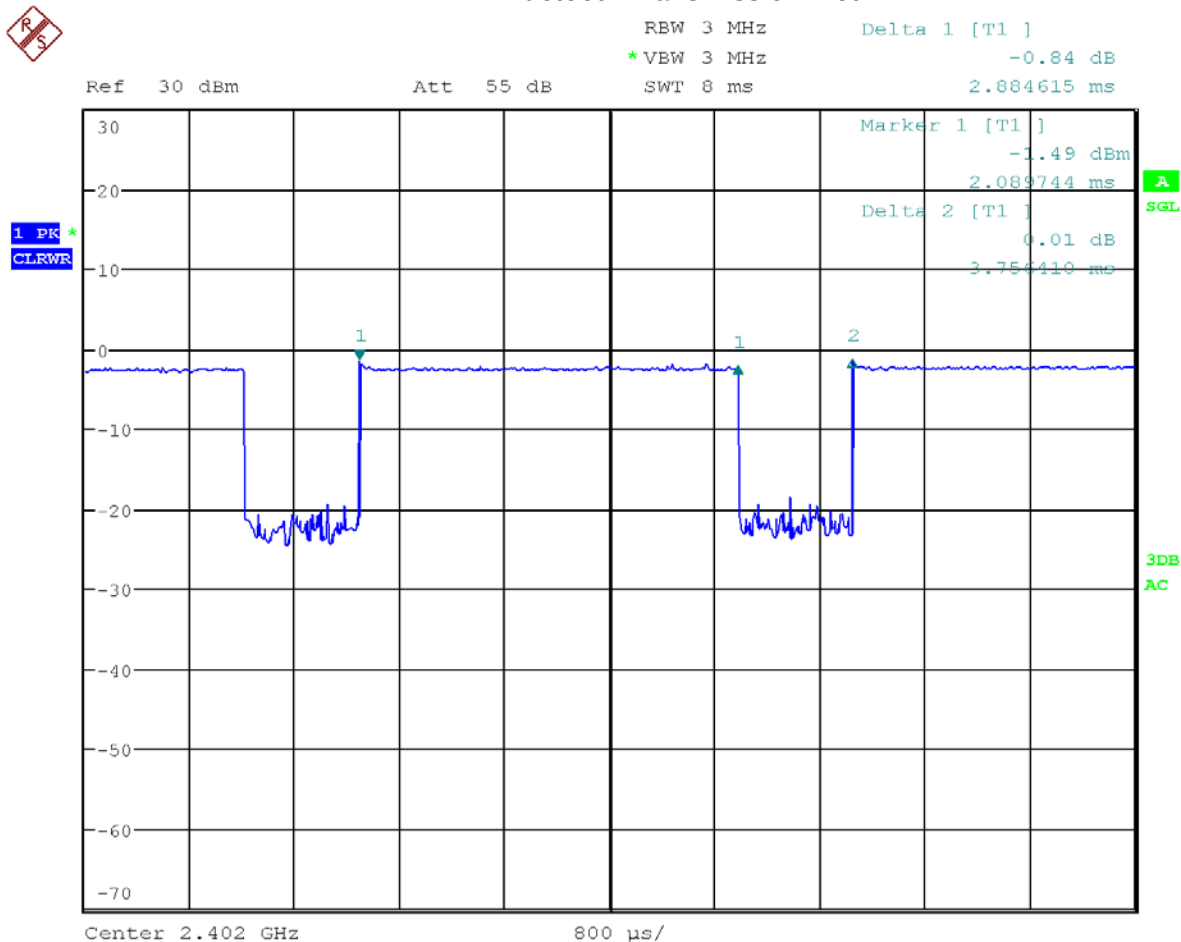

Date: 6.JAN.2020 11:04:34


Equation 7-1 Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.885\text{ms}}{3.756\text{ms}} * 100\% = 76.8\%$$

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 23 of 44

7.3.2 Maximum Bluetooth Transmission Antenna WF 8 Variant 1

Figure 7-3
Bluetooth Transmission Plot

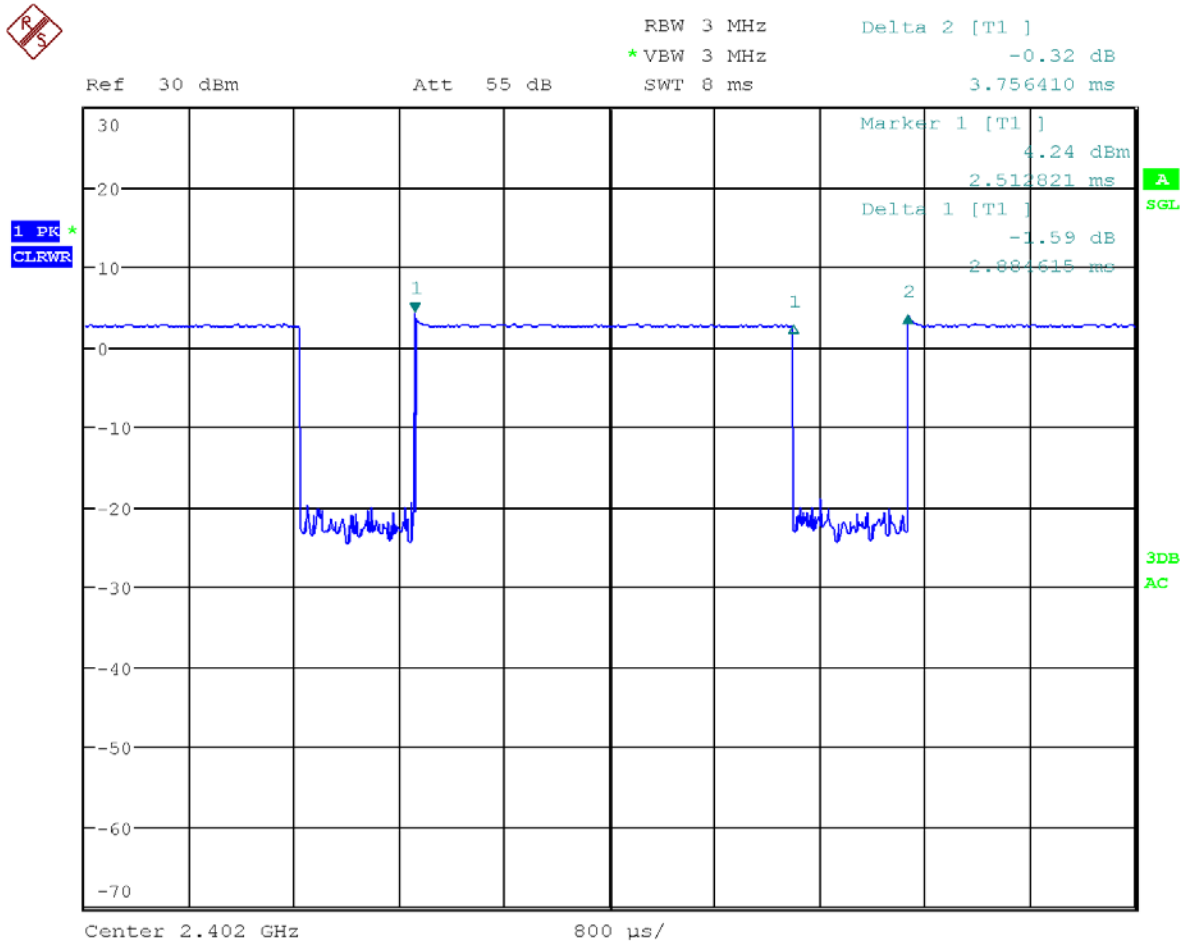

Date: 6.JAN.2020 11:08:23


Equation 7-2
Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.885\text{ms}}{3.756\text{ms}} * 100\% = 76.8\%$$

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 24 of 44

7.3.3 Maximum Bluetooth Transmission Antenna WF 7 Variant 2

Figure 7-4
Bluetooth Transmission Plot

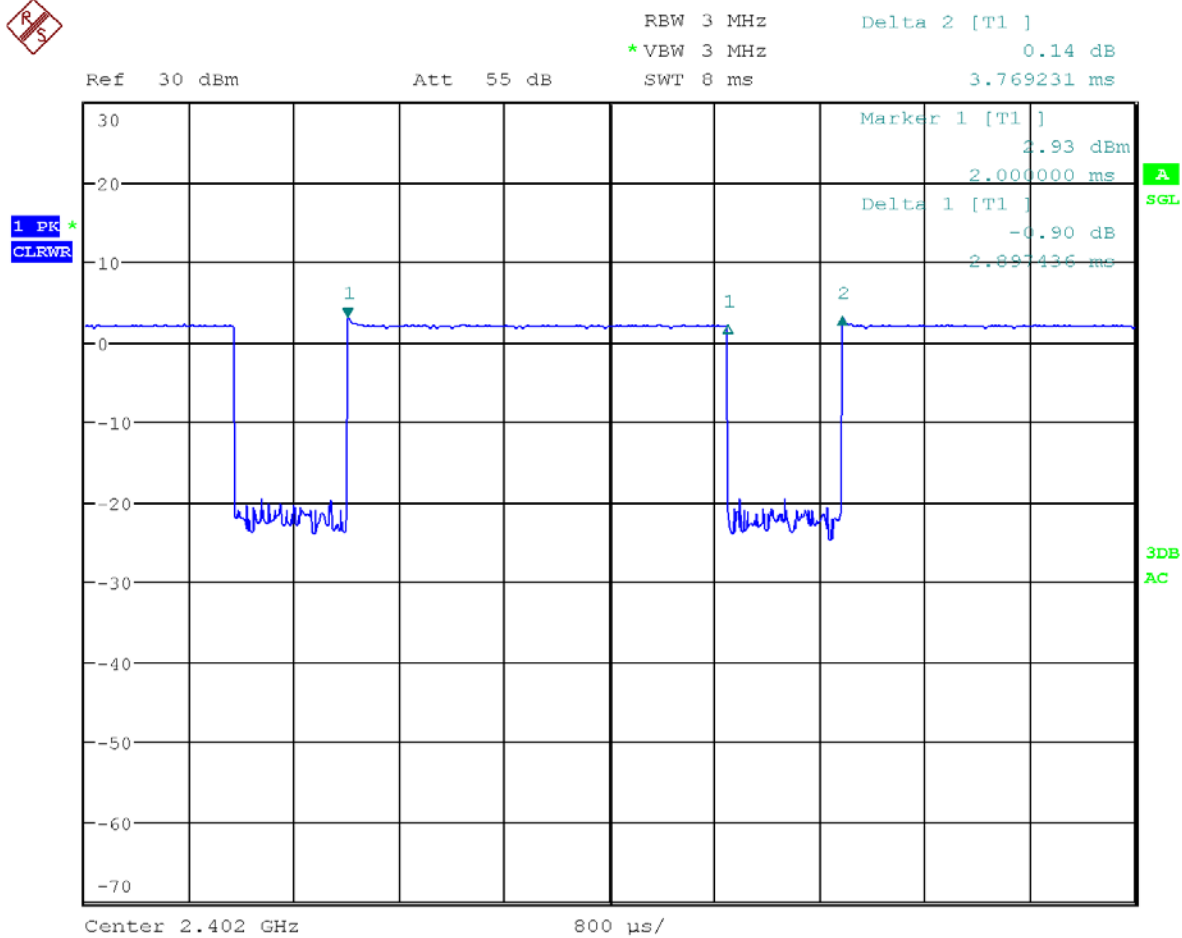

Date: 6.JAN.2020 10:58:44


Equation 7-3
Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.897\text{ms}}{3.769\text{ms}} * 100\% = 76.9\%$$

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 25 of 44

7.3.4 Maximum Bluetooth Transmission Antenna WF 8 Variant 2

Figure 7-5
Bluetooth Transmission Plot

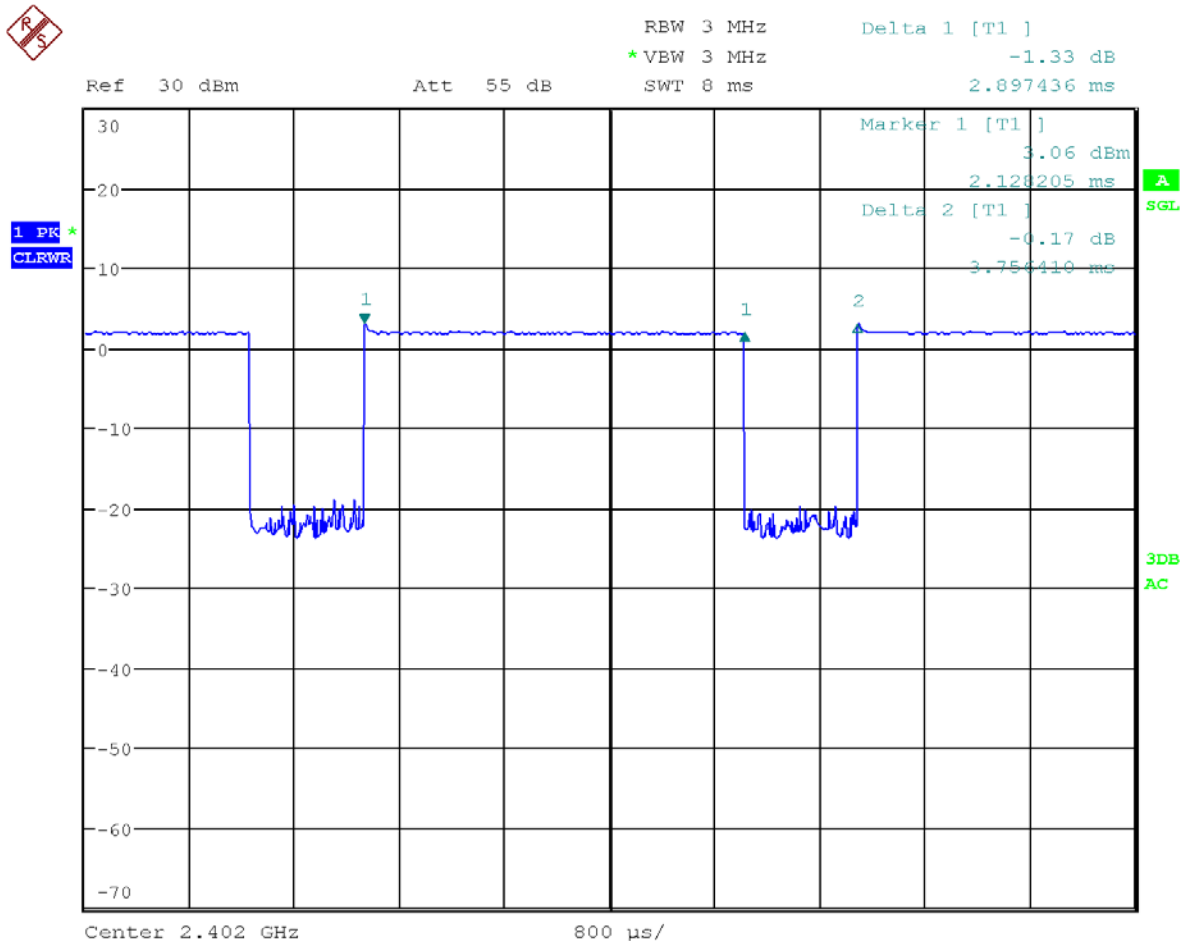

Date: 6.JAN.2020 10:59:59

Equation 7-4 Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.897\text{ms}}{3.756\text{ms}} * 100\% = 77.1\%$$

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 26 of 44

7.3.5 Notes for Bluetooth

- The Bluetooth chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- Bluetooth SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining Bluetooth configurations.
- Full power measurements were performed for Variant 1 and Variant 2 per FCC KDB Procedures 248227.

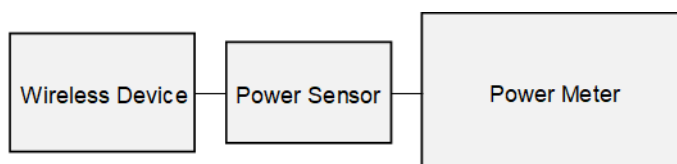


Figure 7-6
Power Measurement Setup

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 27 of 44

8 SYSTEM VERIFICATION

8.1 Tissue Verification

Table 8-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
12/18/2019	2450B	21.6	2400	1.965	50.838	1.902	52.767	3.31%	-3.66%
			2450	2.022	50.678	1.950	52.700	3.69%	-3.84%
			2500	2.102	50.430	2.021	52.636	4.01%	-4.19%
1/19/2020	2450B	22.2	2400	1.983	50.923	1.902	52.767	4.26%	-3.49%
			2450	2.019	50.839	1.950	52.700	3.54%	-3.53%
			2500	2.118	50.582	2.021	52.636	4.80%	-3.90%
01/03/2020	5200B -5800B	18.1	5180	5.046	49.623	5.276	49.041	-4.36%	1.19%
			5200	5.076	49.600	5.299	49.014	-4.21%	1.20%
			5220	5.094	49.551	5.323	48.987	-4.30%	1.15%
			5240	5.128	49.495	5.346	48.960	-4.08%	1.09%
			5260	5.163	49.444	5.369	48.933	-3.84%	1.04%
			5280	5.186	49.428	5.393	48.906	-3.84%	1.07%
			5300	5.215	49.390	5.416	48.879	-3.71%	1.05%
			5320	5.243	49.344	5.439	48.851	-3.60%	1.01%
			5500	5.498	49.002	5.650	48.607	-2.69%	0.81%
			5520	5.525	48.962	5.673	48.580	-2.61%	0.79%
			5540	5.556	48.918	5.696	48.553	-2.46%	0.75%
			5560	5.592	48.880	5.720	48.526	-2.24%	0.73%
			5580	5.618	48.832	5.743	48.499	-2.18%	0.69%
			5600	5.648	48.815	5.766	48.471	-2.05%	0.71%
			5620	5.681	48.763	5.790	48.444	-1.88%	0.66%
			5680	5.769	48.660	5.860	48.363	-1.55%	0.61%
			5700	5.798	48.603	5.883	48.336	-1.44%	0.55%
			5745	5.868	48.533	5.936	48.275	-1.15%	0.53%
			5765	5.900	48.479	5.959	48.248	-0.99%	0.48%
			5785	5.931	48.456	5.982	48.220	-0.85%	0.49%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 28 of 44

8.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix D.

Table 8-2
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
AM4	2450	BODY	12/18/2019	20.6	21.6	0.100	921	7532	5.320	50.800	53.200	4.72%
AM4	2450	BODY	01/19/2020	22.4	20.4	0.100	921	7532	5.170	50.800	51.700	1.77%
AM5	5250	BODY	01/03/2020	22.1	18.5	0.050	1123	7491	3.900	74.000	78.000	5.41%
AM5	5600	BODY	01/03/2020	22.1	18.5	0.050	1123	7491	4.190	77.600	83.800	7.99%
AM5	5750	BODY	01/03/2020	22.1	18.5	0.050	1123	7491	3.840	74.700	76.800	2.81%

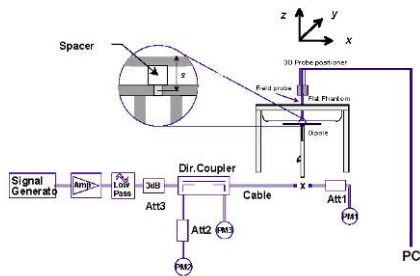


Figure 8-1
System Verification Setup Diagram



Figure 8-2
System Verification Setup Photo

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 29 of 44

9 SAR DATA SUMMARY

9.1 Standalone Body SAR Data

Table 9-1
2.4 GHz WLAN Body SAR Data – Ant WF 7

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	(W/kg)		
2412	1	802.11b	DSSS	22	16.50	15.65	-0.12	0 mm	Ant WF 7	V1	DLXZP008P572	1	back	99.3	0.971	1.216	1.007	1.189	0.395	0.484	
2412	1	802.11b	DSSS	22	16.50	15.71	-0.05	0 mm	Ant WF 7	V2	DLXZR00CP572	1	back	98.9	0.979	1.199	1.011	1.187	0.428	0.519	A1
2437	6	802.11b	DSSS	22	16.50	15.70	0.12	0 mm	Ant WF 7	V1	DLXZP008P572	1	back	99.3	0.915	1.202	1.007	1.108	0.374	0.453	
2462	11	802.11b	DSSS	22	16.50	15.64	0.00	0 mm	Ant WF 7	V1	DLXZP008P572	1	back	99.3	0.857	1.219	1.007	1.052	0.363	0.446	
2437	6	802.11b	DSSS	22	16.50	15.70	-0.18	0 mm	Ant WF 7	V1	DLXZP008P572	1	top	99.3	0.300	1.202	1.007	0.363	0.133	0.161	
2437	6	802.11b	DSSS	22	16.50	15.70	0.06	0 mm	Ant WF 7	V1	DLXZP008P572	1	bottom	99.3	0.020	1.202	1.007	0.024	0.007	0.008	
2437	6	802.11b	DSSS	22	16.50	15.70	0.00	0 mm	Ant WF 7	V1	DLXZP008P572	1	right	99.3	0.000	1.202	1.007	0.000	0.000	0.000	
2437	6	802.11b	DSSS	22	16.50	15.70	0.01	0 mm	Ant WF 7	V1	DLXZP008P572	1	left	99.3	0.565	1.202	1.007	0.684	0.203	0.246	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body												
Spatial Peak									1.6 W/kg (mW/g)												
Uncontrolled Exposure/General Population									averaged over 1 gram												

Table 9-2
2.4 GHz WLAN Body SAR Data – Ant WF 8

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)		(W/kg)	
2412	1	802.11b	DSSS	22	17.50	16.36	-0.12	0 mm	Ant WF 8	V2	DLXZR00DP572	1	back	99.2	0.744	1.300	1.008	0.975	0.308	0.404	
2437	6	802.11b	DSSS	22	17.50	16.54	0.14	0 mm	Ant WF 8	V1	DLXZP009P572	1	back	99.3	0.645	1.247	1.007	0.810	0.277	0.348	
2437	6	802.11b	DSSS	22	17.50	16.36	-0.05	0 mm	Ant WF 8	V2	DLXZR00DP572	1	back	99.2	0.764	1.300	1.008	1.001	0.316	0.414	
2462	11	802.11b	DSSS	22	17.50	16.35	-0.06	0 mm	Ant WF 8	V2	DLXZR00DP572	1	back	99.2	0.707	1.303	1.008	0.929	0.296	0.389	
2437	6	802.11b	DSSS	22	17.50	16.36	-0.07	0 mm	Ant WF 8	V2	DLXZR00DP572	1	top	99.2	0.298	1.300	1.008	0.390	0.131	0.172	
2437	6	802.11b	DSSS	22	17.50	16.36	0.12	0 mm	Ant WF 8	V2	DLXZR00DP572	1	bottom	99.2	0.035	1.300	1.008	0.046	0.013	0.017	
2437	6	802.11b	DSSS	22	17.50	16.36	-0.06	0 mm	Ant WF 8	V2	DLXZR00DP572	1	right	99.2	0.069	1.300	1.008	0.090	0.030	0.039	
2437	6	802.11b	DSSS	22	17.50	16.36	0.15	0 mm	Ant WF 8	V2	DLXZR00DP572	1	left	99.2	0.000	1.300	1.008	0.000	0.000	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body												
Spatial Peak									1.6 W/kg (mW/g)												
Uncontrolled Exposure/General Population									averaged over 1 gram												

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 30 of 44

Table 9-3
5 GHz WLAN Body SAR Data – 5 GHz ANTlower

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot
MHz	Ch.														(W/kg)			(W/kg)	(W/kg)		
5230	46	802.11n	OFDM	40	17.50	16.54	-0.12	0 mm	5 GHz ANTlower	V1	DLXZP007P572	13.5	back	98.2	0.113	1.247	1.018	0.143	0.044	0.056	
5230	46	802.11n	OFDM	40	17.50	16.54	-0.17	0 mm	5 GHz ANTlower	V1	DLXZP007P572	13.5	top	98.2	0.001	1.247	1.018	0.001	0.000	0.000	
5230	46	802.11n	OFDM	40	17.50	16.54	0.14	0 mm	5 GHz ANTlower	V1	DLXZP007P572	13.5	bottom	98.2	0.002	1.247	1.018	0.003	0.000	0.000	
5190	38	802.11n	OFDM	40	14.50	13.57	0.05	0 mm	5 GHz ANTlower	V1	DLXZP007P572	13.5	right	98.2	0.237	1.239	1.018	0.299	0.052	0.066	
5230	46	802.11n	OFDM	40	17.50	16.54	-0.03	0 mm	5 GHz ANTlower	V1	DLXZP007P572	13.5	right	98.2	0.888	1.247	1.018	1.127	0.217	0.275	
5230	46	802.11n	OFDM	40	17.50	16.59	0.12	0 mm	5 GHz ANTlower	V2	DLXZR00CP572	13.5	right	98.2	0.729	1.233	1.018	0.915	0.179	0.225	
5230	46	802.11n	OFDM	40	17.50	16.54	0.19	0 mm	5 GHz ANTlower	V1	DLXZP007P572	13.5	left	98.2	0.012	1.247	1.018	0.015	0.004	0.005	
5230	46	802.11n	OFDM	40	17.50	16.54	-0.03	0 mm	5 GHz ANTlower	V1	DLXZP007P572	13.5	right	98.2	0.850	1.247	1.018	1.079	0.212	0.269	
5690	138	802.11ac	OFDM	80	15.75	14.90	0.06	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	back	96.0	0.096	1.216	1.042	0.122	0.042	0.053	
5690	138	802.11ac	OFDM	80	15.75	14.90	0.11	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	top	96.0	0.000	1.216	1.042	0.000	0.000	0.000	
5690	138	802.11ac	OFDM	80	15.75	14.90	0.13	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	bottom	96.0	0.002	1.216	1.042	0.003	0.001	0.001	
5530	106	802.11ac	OFDM	80	13.50	12.52	0.05	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	right	96.0	0.357	1.253	1.042	0.466	0.092	0.120	
5610	122	802.11ac	OFDM	80	15.75	14.86	-0.10	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	right	96.0	0.874	1.227	1.042	1.117	0.238	0.304	
5610	122	802.11ac	OFDM	80	15.75	14.79	-0.13	0 mm	5 GHz ANTlower	V2	DLXZP00GP572	29.3	right	95.7	0.739	1.247	1.045	0.963	0.193	0.252	
5690	138	802.11ac	OFDM	80	15.75	14.90	-0.13	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	right	96.0	0.732	1.216	1.042	0.927	0.200	0.253	
5690	138	802.11ac	OFDM	80	15.75	14.90	0.10	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	left	96.0	0.013	1.216	1.042	0.016	0.006	0.008	
5775	155	802.11ac	OFDM	80	16.00	15.00	0.18	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	back	96.0	0.090	1.259	1.042	0.118	0.036	0.047	
5775	155	802.11ac	OFDM	80	16.00	15.00	0.09	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	top	96.0	0.000	1.259	1.042	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	16.00	15.00	0.00	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	bottom	96.0	0.000	1.259	1.042	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	16.00	15.00	-0.09	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	right	96.0	0.872	1.259	1.042	1.144	0.261	0.342	
5775	155	802.11ac	OFDM	80	16.00	15.15	-0.09	0 mm	5 GHz ANTlower	V2	DLXZP00GP572	29.3	right	95.7	0.845	1.216	1.045	1.074	0.223	0.283	
5775	155	802.11ac	OFDM	80	16.00	15.00	0.14	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	left	96.0	0.009	1.259	1.042	0.012	0.004	0.005	
5610	122	802.11ac	OFDM	80	15.75	14.86	0.01	0 mm	5 GHz ANTlower	V1	DLXZP009P572	29.3	right	96.0	0.839	1.227	1.042	1.073	0.226	0.289	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

Note: Blue entry indicates variability measurement.

FCC ID: BCGA2229		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 31 of 44

Table 9-4
5 GHz WLAN Body SAR Data – 5 GHz ANTupper

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate [Mbps]	Side	Duty Cycle (%)	SAR (1g)		Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)	(W/kg)			(W/kg)	(W/kg)		
5230	46	802.11n	OFDM	40	17.00	16.04	0.00	0 mm	5 GHz ANTupper	V1	DLXZR004P572	13.5	back	98.2	0.070	1.247	1.018	0.089	0.030	0.038		
5230	46	802.11n	OFDM	40	17.00	16.04	0.11	0 mm	5 GHz ANTupper	V1	DLXZR004P572	13.5	top	98.2	0.006	1.247	1.018	0.008	0.002	0.003		
5230	46	802.11n	OFDM	40	17.00	16.04	0.10	0 mm	5 GHz ANTupper	V1	DLXZR004P572	13.5	bottom	98.2	0.001	1.247	1.018	0.001	0.000	0.000		
5190	38	802.11n	OFDM	40	14.50	13.50	0.13	0 mm	5 GHz ANTupper	V1	DLXZR004P572	13.5	right	98.2	0.310	1.259	1.018	0.397	0.077	0.099		
5230	46	802.11n	OFDM	40	17.00	16.04	0.05	0 mm	5 GHz ANTupper	V1	DLXZR004P572	13.5	right	98.2	0.820	1.247	1.018	1.041	0.221	0.281		
5230	46	802.11n	OFDM	40	17.00	16.07	0.03	0 mm	5 GHz ANTupper	V2	DLXZR00CP572	13.5	right	98.2	0.688	1.239	1.018	0.868	0.197	0.248		
5230	46	802.11n	OFDM	40	17.00	16.04	0.16	0 mm	5 GHz ANTupper	V1	DLXZR004P572	13.5	left	98.2	0.009	1.247	1.018	0.011	0.004	0.005		
5610	122	802.11ac	OFDM	80	15.00	14.13	-0.15	0 mm	5 GHz ANTupper	V1	DLXZR004P572	29.3	back	95.7	0.057	1.222	1.045	0.073	0.022	0.028		
5610	122	802.11ac	OFDM	80	15.00	14.13	0.18	0 mm	5 GHz ANTupper	V1	DLXZR004P572	29.3	top	95.7	0.001	1.222	1.045	0.001	0.000	0.000		
5610	122	802.11ac	OFDM	80	15.00	14.13	0.19	0 mm	5 GHz ANTupper	V1	DLXZR004P572	29.3	bottom	95.7	0.000	1.222	1.045	0.000	0.000	0.000		
5530	106	802.11ac	OFDM	80	13.50	12.52	-0.12	0 mm	5 GHz ANTupper	V1	DLXZR004P572	29.3	right	95.7	0.469	1.253	1.045	0.614	0.133	0.174		
5610	122	802.11ac	OFDM	80	15.00	14.13	0.00	0 mm	5 GHz ANTupper	V1	DLXZR004P572	29.3	right	95.7	0.617	1.222	1.045	0.788	0.178	0.227		
5690	138	802.11ac	OFDM	80	15.00	14.00	0.12	0 mm	5 GHz ANTupper	V1	DLXZR004P572	29.3	right	95.7	0.902	1.259	1.045	1.187	0.275	0.362	A2	
5690	138	802.11ac	OFDM	80	15.00	13.86	0.05	0 mm	5 GHz ANTupper	V2	DLXZR00CP572	29.3	right	95.7	0.732	1.300	1.045	0.994	0.221	0.300		
5610	122	802.11ac	OFDM	80	15.00	14.13	-0.11	0 mm	5 GHz ANTupper	V1	DLXZR004P572	29.3	left	95.7	0.006	1.222	1.045	0.008	0.002	0.003		
5775	155	802.11ac	OFDM	80	16.50	15.52	-0.13	0 mm	5 GHz ANTupper	V2	DLXZR00HP572	29.3	back	95.7	0.055	1.253	1.045	0.072	0.024	0.031		
5775	155	802.11ac	OFDM	80	16.50	15.52	0.19	0 mm	5 GHz ANTupper	V2	DLXZR00HP572	29.3	top	95.7	0.000	1.253	1.045	0.000	0.000	0.000		
5775	155	802.11ac	OFDM	80	16.50	15.52	0.16	0 mm	5 GHz ANTupper	V2	DLXZR00HP572	29.3	bottom	95.7	0.000	1.253	1.045	0.000	0.000	0.000		
5775	155	802.11ac	OFDM	80	16.50	15.80	0.01	0 mm	5 GHz ANTupper	V1	DLXZR00SP572	29.3	right	95.7	0.850	1.175	1.045	1.044	0.280	0.344		
5775	155	802.11ac	OFDM	80	16.50	15.52	0.03	0 mm	5 GHz ANTupper	V2	DLXZR00HP572	29.3	right	95.7	0.856	1.253	1.045	1.121	0.283	0.371		
5775	155	802.11ac	OFDM	80	16.50	15.52	-0.06	0 mm	5 GHz ANTupper	V2	DLXZR00HP572	29.3	left	95.7	0.006	1.253	1.045	0.008	0.002	0.003		
5690	138	802.11ac	OFDM	80	15.00	14.00	0.12	0 mm	5 GHz ANTupper	V1	DLXZR004P572	29.3	right	95.7	0.887	1.259	1.045	1.167	0.267	0.351		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Note: Blue entry indicates variability measurement.

Table 9-5
Bluetooth Body SAR Data – Ant WF 7

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	(W/kg)		
2402	0	Bluetooth	FHSS	17.00	16.97	0.08	0 mm	Ant WF 7	V1	DLXZP008P572	1	back	76.8	1.110	1.007	1.009	1.128	0.488	0.496	A3
2402	0	Bluetooth	FHSS	17.00	17.00	0.04	0 mm	Ant WF 7	V2	DLXZR00CP572	1	back	76.9	0.995	1.000	1.008	1.003	0.423	0.426	
2441	39	Bluetooth	FHSS	17.00	16.96	0.01	0 mm	Ant WF 7	V1	DLXZP008P572	1	back	76.8	1.050	1.009	1.009	1.069	0.436	0.444	
2480	78	Bluetooth	FHSS	17.00	16.85	0.06	0 mm	Ant WF 7	V1	DLXZP008P572	1	back	76.8	0.682	1.035	1.009	0.712	0.305	0.319	
2402	0	Bluetooth	FHSS	17.00	16.97	-0.01	0 mm	Ant WF 7	V1	DLXZP008P572	1	Top	76.8	0.383	1.007	1.009	0.389	0.174	0.177	
2402	0	Bluetooth	FHSS	17.00	16.97	0.12	0 mm	Ant WF 7	V1	DLXZP008P572	1	bottom	76.8	0.024	1.007	1.009	0.024	0.010	0.010	
2402	0	Bluetooth	FHSS	17.00	16.97	0.11	0 mm	Ant WF 7	V1	DLXZP008P572	1	right	76.8	0.001	1.007	1.009	0.001	0.000	0.000	
2402	0	Bluetooth	FHSS	17.00	16.97	-0.03	0 mm	Ant WF 7	V1	DLXZP008P572	1	left	76.8	0.612	1.007	1.009	0.622	0.219	0.223	
2402	0	Bluetooth	FHSS	17.00	16.97	0.13	0 mm	Ant WF 7	V1	DLXZP008P572	1	back	76.8	1.080	1.007	1.009	1.097	0.456	0.463	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body												
Spatial Peak								1.6 W/kg (mW/g)												
Uncontrolled Exposure/General Population								averaged over 1 gram												

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per the manufacturer.

Note: Blue entry indicates variability measurement.

FCC ID: BCGA2229		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 32 of 44

Table 9-6
Bluetooth Body SAR Data – Ant WF 8

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)		(W/kg)	
2402	0	Bluetooth	FHSS	18.0	17.80	-0.20	0 mm	Ant WF 8	V2	DLXZR00DP572	1	back	77.1	0.706	1.047	1.005	0.743	0.301	0.317	
2441	39	Bluetooth	FHSS	18.0	17.60	-0.11	0 mm	Ant WF 8	V1	DLXZR004P572	1	back	76.8	0.734	1.096	1.009	0.812	0.312	0.345	
2441	39	Bluetooth	FHSS	18.0	18.00	0.18	0 mm	Ant WF 8	V2	DLXZR00DP572	1	back	77.1	0.860	1.000	1.005	0.864	0.358	0.360	
2480	78	Bluetooth	FHSS	18.0	17.81	-0.06	0 mm	Ant WF 8	V2	DLXZR00DP572	1	back	77.1	0.651	1.045	1.005	0.684	0.275	0.289	
2441	39	Bluetooth	FHSS	18.0	18.00	-0.04	0 mm	Ant WF 8	V2	DLXZR00DP572	1	Top	77.1	0.266	1.000	1.005	0.267	0.117	0.118	
2441	39	Bluetooth	FHSS	18.0	18.00	0.17	0 mm	Ant WF 8	V2	DLXZR00DP572	1	bottom	77.1	0.027	1.000	1.005	0.027	0.010	0.010	
2441	39	Bluetooth	FHSS	18.0	18.00	-0.06	0 mm	Ant WF 8	V2	DLXZR00DP572	1	right	77.1	0.058	1.000	1.005	0.058	0.025	0.025	
2441	39	Bluetooth	FHSS	18.0	18.00	0.00	0 mm	Ant WF 8	V2	DLXZR00DP572	1	left	77.1	0.000	1.000	1.005	0.000	0.000	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram													

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per the manufacturer.

9.2 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02 and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 11 for variability analysis.
- FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determine SAR test exclusion for adjacent edge configurations.

WLAN Notes:

- Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n/ax) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 6.2.4 for more information.
- Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 6.2.5 for more information.
- Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 10 for complete analysis.

FCC ID: BCGA2229	 PCTEST	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 33 of 44

4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8 MHz, VBW = 50 MHz, and detector = peak per guidance of Section 6.0 b) of ANSI C63. 10-2013 and KDB 558074 D01 v04. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100.

Bluetooth Notes:

1. Bluetooth SAR was evaluated with a test mode with hopping disabled with DH5 operation. The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is limited to 77.5% per the manufacturer. See Section 7.3 for the time domain plot and calculation for the duty factor of the device.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 34 of 44

10 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

10.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit together.

10.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g SAR.

Note:

*The SAR distributions for at least one of the antennas are spatially separated from the other antennas per FCC KDB Publication 248227 Section 6.1 procedures. Therefore, the simultaneous transmission were treated independently for this configuration. See section 10.4 for more information about the Spatial Separation Analysis.

10.3 Body SAR Simultaneous Transmission Analysis

Table 10-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	2.4 GHz WLAN Ant WF 7 SAR (W/kg)	2.4 GHz WLAN Ant WF 8 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	1.189	1.001	1.189*
	Top	0.363	0.390	0.753
	Bottom	0.024	0.046	0.070
	Right	0.000	0.090	0.090
	Left	0.684	0.000	0.684

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 35 of 44

Table 10-2
Simultaneous Transmission Scenario with 2.4 GHz Bluetooth

Simult Tx	Configuration	Bluetooth Ant WF 7 SAR (W/kg)	Bluetooth Ant WF 8 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	1.128	0.864	1.128*
	Top	0.389	0.267	0.656
	Bottom	0.024	0.027	0.051
	Right	0.001	0.058	0.059
	Left	0.622	0.000	0.622

Table 10-3
Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	WLAN 5 GHz ANTlower SAR (W/kg)	WLAN 5 GHz ANTupper SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.143	0.089	0.232
	Top	0.001	0.008	0.009
	Bottom	0.003	0.001	0.004
	Right	1.144	1.187	1.187*
	Left	0.016	0.011	0.027

Table 10-4
Simultaneous Transmission Scenario Bluetooth MIMO and 5 GHz MIMO

Simult Tx	Configuration	Bluetooth Ant WF 7 SAR (W/kg)	Bluetooth Ant WF 8 SAR (W/kg)	WLAN 5 GHz ANTlower SAR (W/kg)	WLAN 5 GHz ANTupper SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Body SAR	Back	1.128	0.864	0.143	0.089	1.360*
	Top	0.389	0.267	0.001	0.008	0.665
	Bottom	0.024	0.027	0.003	0.001	0.055
	Right	0.001	0.058	1.144	1.187	1.246*
	Left	0.622	0.000	0.016	0.011	0.649

10.4 Spatial Separation Analysis

Per FCC KDB Publication 248227, antennas may be considered spatially separated when the aggregate SAR from multiple antennas at any location in the combined SAR distribution is either ≤ 1.2 W/kg where at least 90% of the SAR is attributed to a single SAR distribution or ≤ 0.4 W/kg where no more than one SAR distribution is contributing > 0.1 W/kg.

Spatial separation was determined by inspection of the area scan SAR distributions to confirm that at all locations, SAR was < 1.2 W/kg, where at least 90% of the SAR is attributed to a single SAR distribution. See below for illustrations of the spatial separated antennas considered.

FCC ID: BCGA2229	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device		Page 36 of 44

10.4.1 Back Side Spatial Separation Analysis

Figure 10-1
Back Side Spatial Separation for WF7 and WF8


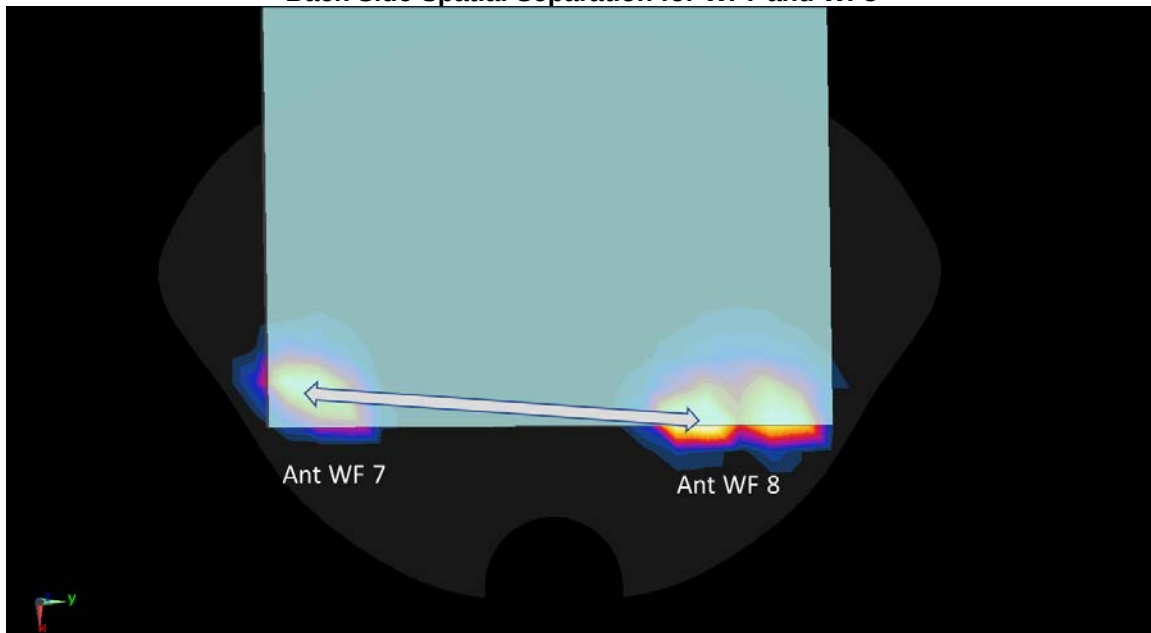


Figure 10-2
Right Edge Spatial Separation for 5 GHz ANTLower and 5 GHz ANTUpper

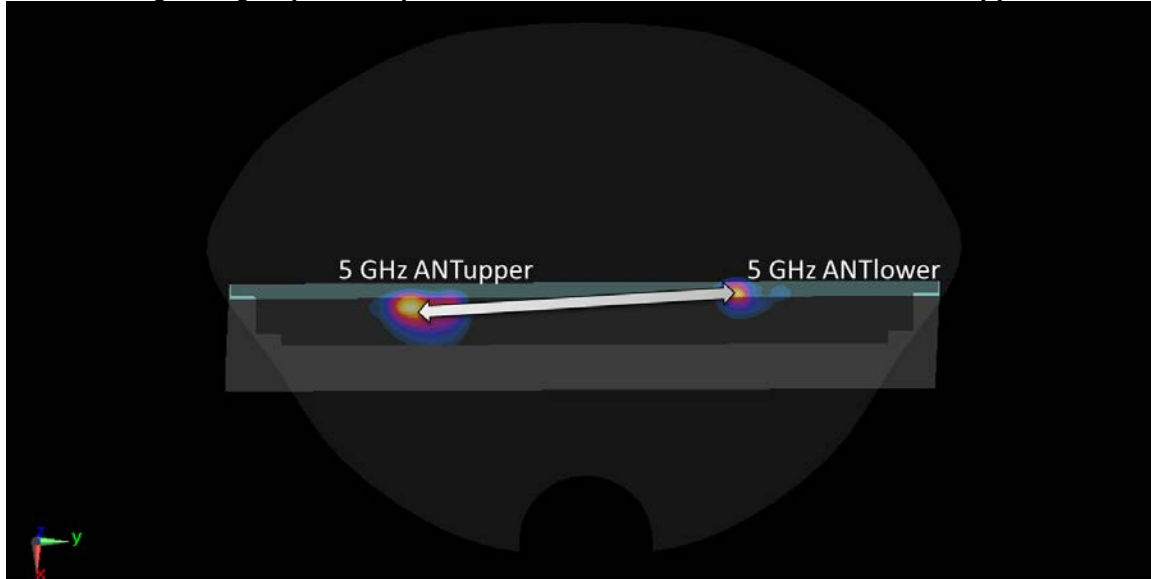

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 37 of 44

10.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results and spatial separation analysis for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 38 of 44

11 SAR MEASUREMENT VARIABILITY

11.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 11-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2450	2402.00	0	Bluetooth	FHSS, Ant WF7	1	back	0 mm	1.110	1.080	1.03	N/A	N/A	N/A	N/A
5250	5230.00	46	802.11n, 40 MHz Bandwidth	OFDM, 5 GHz ANTlower	13.5	right	0 mm	0.888	0.850	1.04	N/A	N/A	N/A	N/A
5600	5610.00	122	802.11ac, 80 MHz Bandwidth	OFDM, 5 GHz ANTlower	29.3	right	0 mm	0.874	0.839	1.04	N/A	N/A	N/A	N/A
5750	5690.00	138	802.11ac, 80 MHz Bandwidth	OFDM, 5 GHz ANTupper	29.3	right	0 mm	0.902	0.887	1.02	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body							
Spatial Peak							1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population							averaged over 1 gram							

11.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 39 of 44

12 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	8/26/2019	Annual	8/26/2020	MY40000670
Agilent	E4438C	ESG Vector Signal Generator	6/27/2019	Annual	6/27/2020	MY45093852
Agilent	N5182A	MXG Vector Signal Generator	6/27/2019	Annual	6/27/2020	US46240505
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343971
Anritsu	MT8862A	Wireless Connectivity Test Set	8/8/2019	Annual	8/8/2020	6261782395
Anritsu	MA24106A	USB Power Sensor	8/5/2019	Annual	8/5/2020	1827527
Anritsu	MA24106A	USB Power Sensor	6/21/2019	Annual	6/21/2020	1244515
Anritsu	MA2411B	Pulse Power Sensor	6/11/2019	Annual	6/11/2020	1207364
Anritsu	MA2411B	Pulse Power Sensor	8/14/2019	Annual	8/14/2020	1315051
Anritsu	ML2496A	Power Meter	11/6/2019	Annual	11/6/2020	1405003
Control Company	4040	Digital Thermometer	2/28/2018	Biennial	2/28/2020	130448366
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/28/2018	Biennial	2/28/2020	170330160
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	7/2/2019	Annual	7/2/2020	MY53401181
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mitutoyo	CD-6"CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13264165
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	FSP-7	Spectrum Analyzer	2/7/2018	Biennial	2/7/2020	100288
Seekonk	NC-100	Torque Wrench	5/4/2018	Biennial	5/4/2020	22216
SPEAG	D2450V2	2450 MHz SAR Dipole	11/12/2018	Biennial	11/12/2020	921
SPEAG	D5GHzV2	5 GHz SAR Dipole	3/13/2018	Biennial	3/13/2020	1123
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/17/2019	Annual	4/17/2020	501
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/10/2019	Annual	7/10/2020	1402
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/7/2019	Annual	5/7/2020	1070
SPEAG	EX3DV4	SAR Probe	4/12/2019	Annual	4/12/2020	7532
SPEAG	EX3DV4	SAR Probe	7/16/2019	Annual	7/16/2020	7491

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: BCGA2229		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 40 of 44

13 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)						RSS	11.5	11.3
Expanded Uncertainty (95% CONFIDENCE LEVEL)						k=2	23.0	22.6

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 41 of 44

14 CONCLUSION

14.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 42 of 44

15 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 43 of 44

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCGA2229	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1912170053-01-R1.BCG	Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device	Page 44 of 44

APPENDIX A: SAR TEST DATA

PCTEST

DUT: BCGA2229; Type: Tablet Device; Serial: DLXZR00CP572

Communication System: UID 0, IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$; $\sigma = 1.979 \text{ S/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-18-2019; Ambient Temp: 20.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7532; ConvF(7.66, 7.66, 7.66) @ 2412 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR,
Ch 1, 1 Mbps, Back Side, Antenna WF7, Variant 2**


Area Scan (11x22x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.90 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.428 W/kg

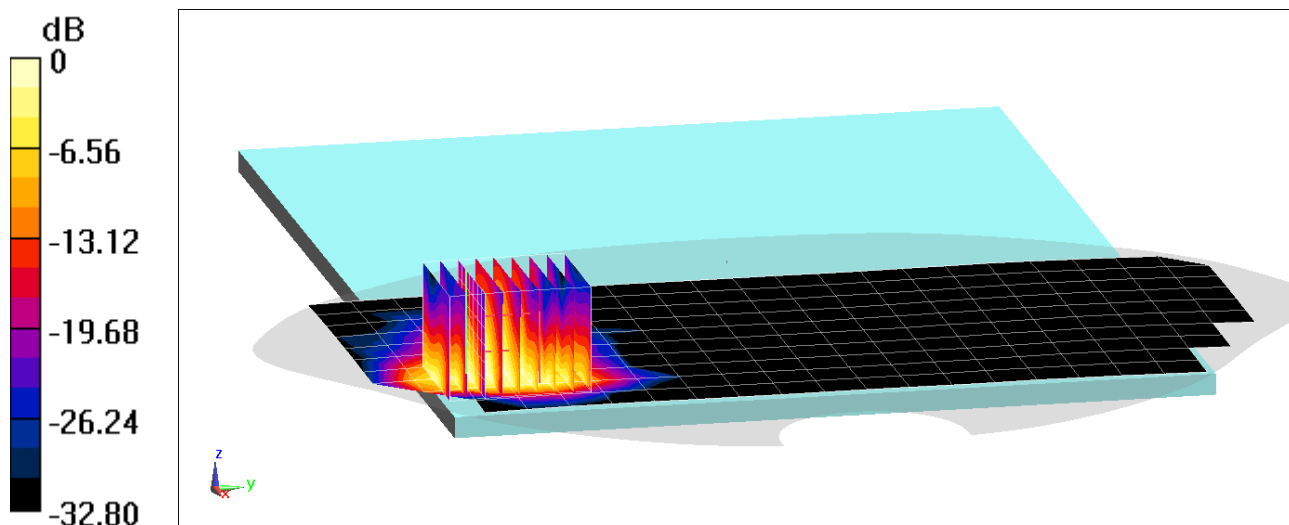

0 dB = 1.54 W/kg = 1.88 dBW/kg

PCTEST

DUT: BCGA2229; Type: Tablet Device; Serial: DLXZR004P572

Communication System: UID 0, _IEEE 802.11ac; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium: 5GHz Body Medium parameters used (interpolated):

$f = 5690 \text{ MHz}$; $\sigma = 5.783 \text{ S/m}$; $\epsilon_r = 48.632$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-03-2020; Ambient Temp: 22.1°C; Tissue Temp: 18.5°C

Probe: EX3DV4 - SN7491; ConvF(4.32, 4.32, 4.32) @ 5690 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1402; Calibrated: 7/10/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

**Mode: IEEE 802.11ac, U-NII-2C, 80 MHz Bandwidth, Body SAR,
Ch 138, 29.3 Mbps, Right Edge, 5 GHz ANTupper, Variant 1**


Area Scan (10x31x1): Measurement grid: dx=5mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 13.76 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.30 W/kg

SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.275 W/kg

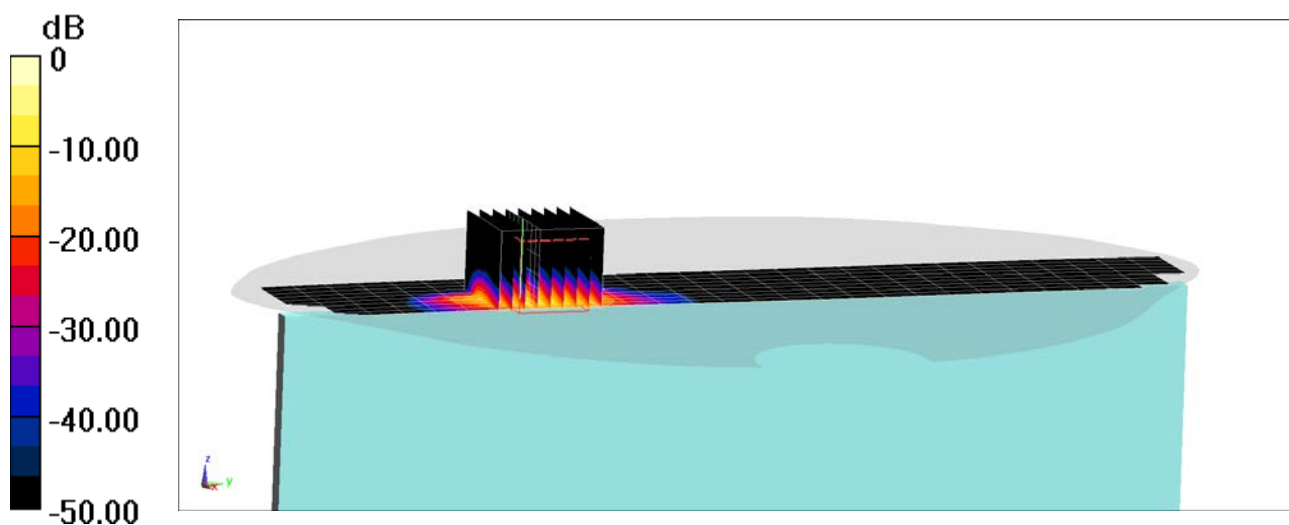

0 dB = 2.37 W/kg = 3.75 dBW/kg

PCTEST

DUT: BCGA2229; Type: Tablet Device; Serial: DLXZP008P572

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.302

Medium: 2450 MHz Body Medium parameters used (interpolated):

$f = 2402 \text{ MHz}$; $\sigma = 1.984 \text{ S/m}$; $\epsilon_r = 50.92$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-19-2020; Ambient Temp: 22.4°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7532; ConvF(7.66, 7.66, 7.66) @ 2402 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

Mode: Bluetooth, Body SAR, Ch 0, 1 Mbps, Back Side
Antenna WF7, Variant 1


Area Scan (14x24x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.20 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.488 W/kg

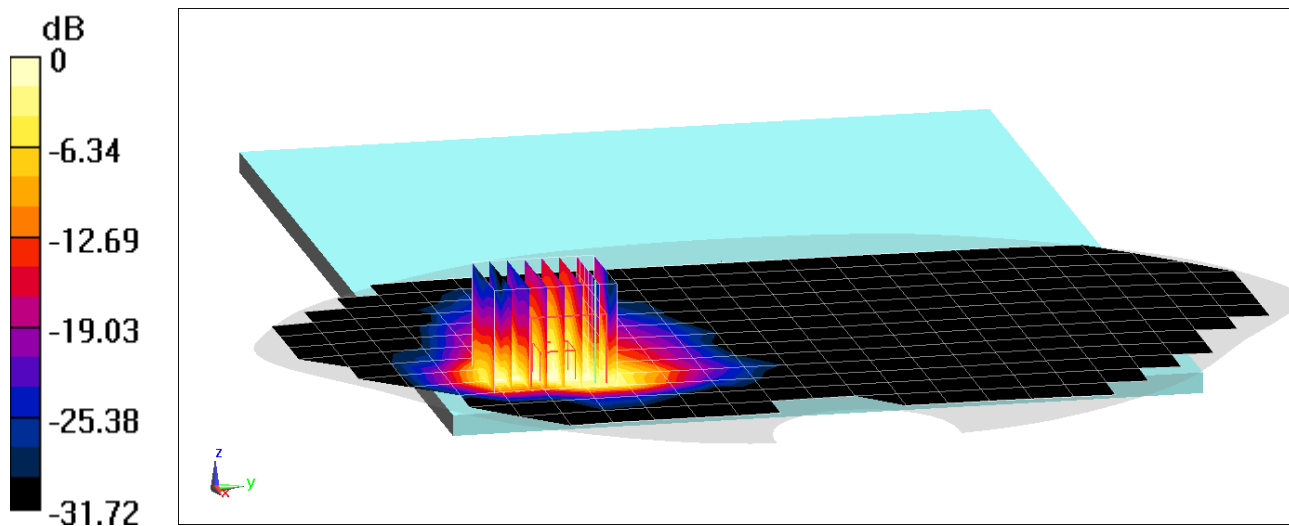

0 dB = 1.81 W/kg = 2.58 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.022 \text{ S/m}$; $\epsilon_r = 50.678$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-18-2019; Ambient Temp: 20.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7532; ConvF(7.66, 7.66, 7.66) @ 2450 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.32 W/kg; SAR(10 g) = 2.45 W/kg

Deviation(1 g) = 4.72%

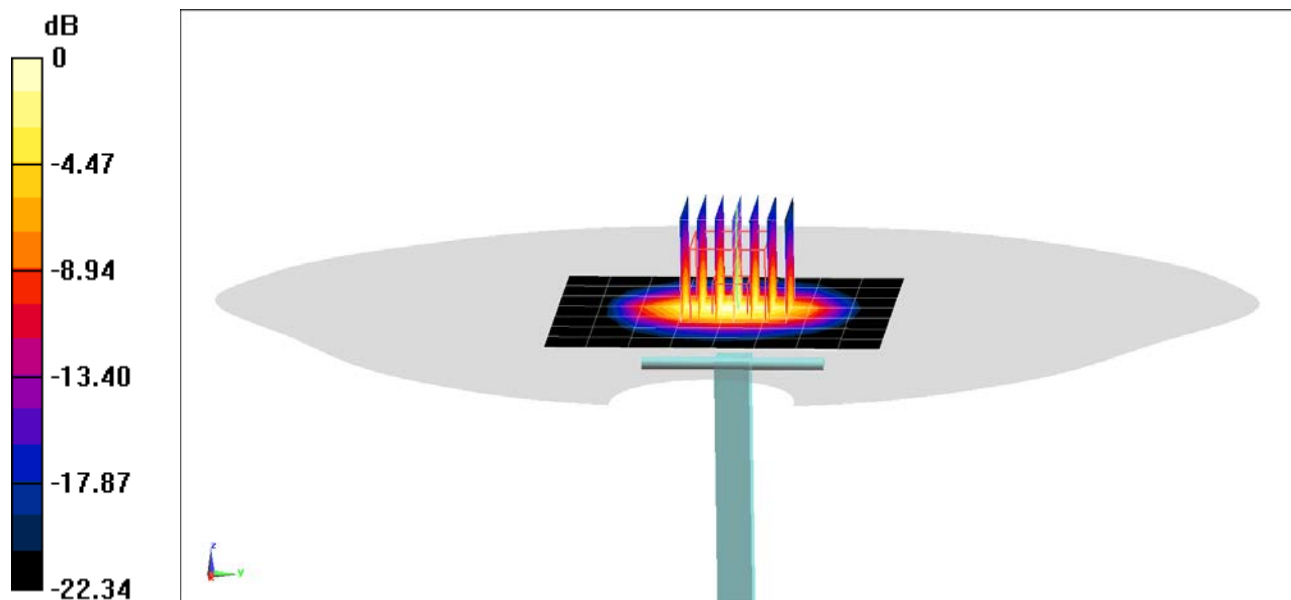

0 dB = 8.82 W/kg = 9.45 dBW/kg

PCTEST

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.019 \text{ S/m}$; $\epsilon_r = 50.839$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2020; Ambient Temp: 22.4°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7532; ConvF(7.66, 7.66, 7.66) @ 2450 MHz; Calibrated: 4/12/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/17/2019

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

2450 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.17 W/kg; SAR(10 g) = 2.37 W/kg

Deviation(1 g) = 1.77%

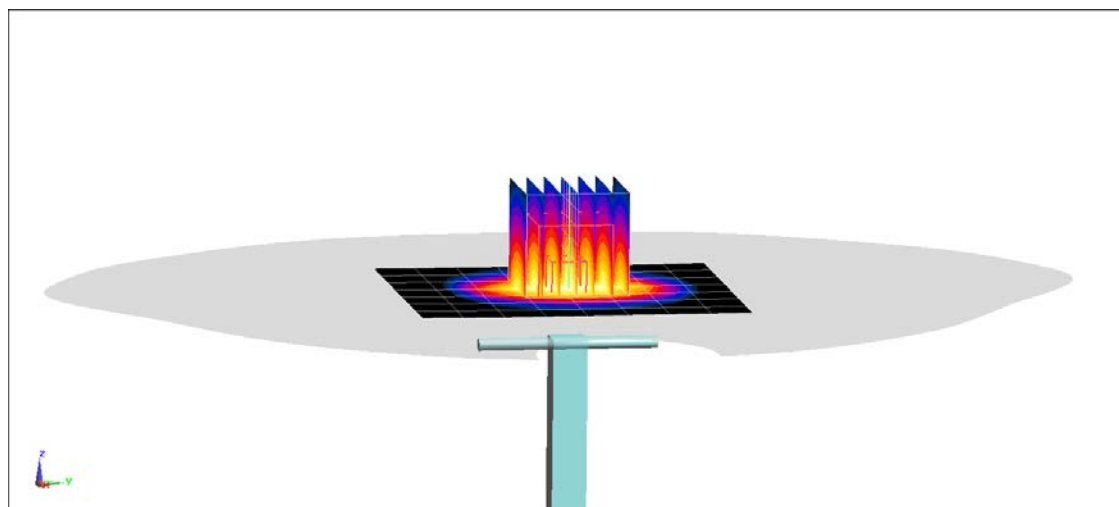

0 dB = 8.55 W/kg = 9.32 dBW/kg

PCTEST.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1123

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5GHz Body Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 5.146 \text{ S/m}$; $\epsilon_r = 49.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-03-2020; Ambient Temp: 22.1°C; Tissue Temp: 18.5°C

Probe: EX3DV4 - SN7491; ConvF(4.87, 4.87, 4.87) @ 5250 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1402; Calibrated: 7/10/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 13.8 W/kg

SAR(1 g) = 3.9 W/kg; SAR(10 g) = 1.1 W/kg

Deviation(1 g) = 5.41%

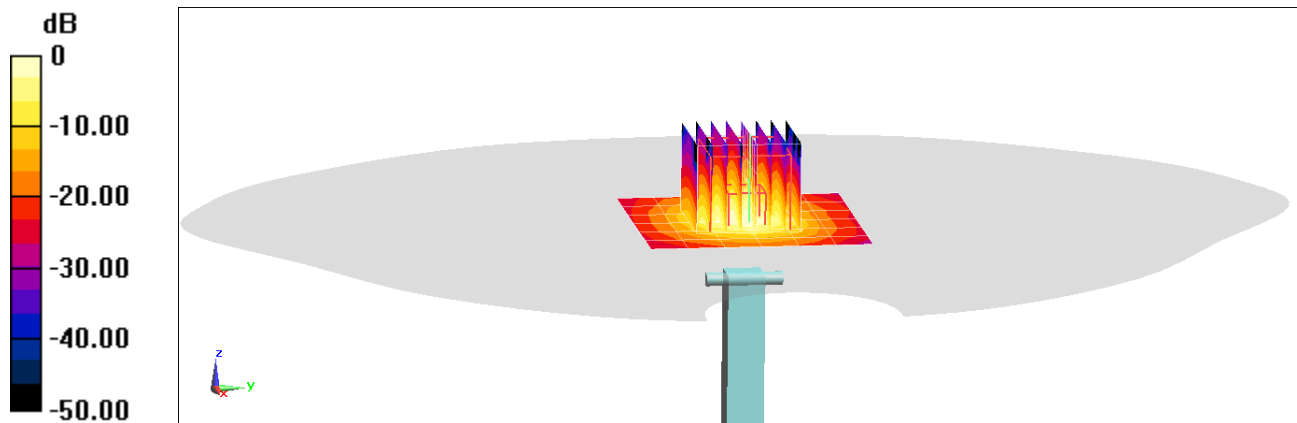

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1123

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.648 \text{ S/m}$; $\epsilon_r = 48.815$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-03-2020; Ambient Temp: 22.1°C; Tissue Temp: 18.5°C

Probe: EX3DV4 - SN7491; ConvF(4.23, 4.23, 4.23) @ 5600 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1402; Calibrated: 7/10/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 4.19 W/kg; SAR(10 g) = 1.17 W/kg

Deviation(1 g) = 7.99%

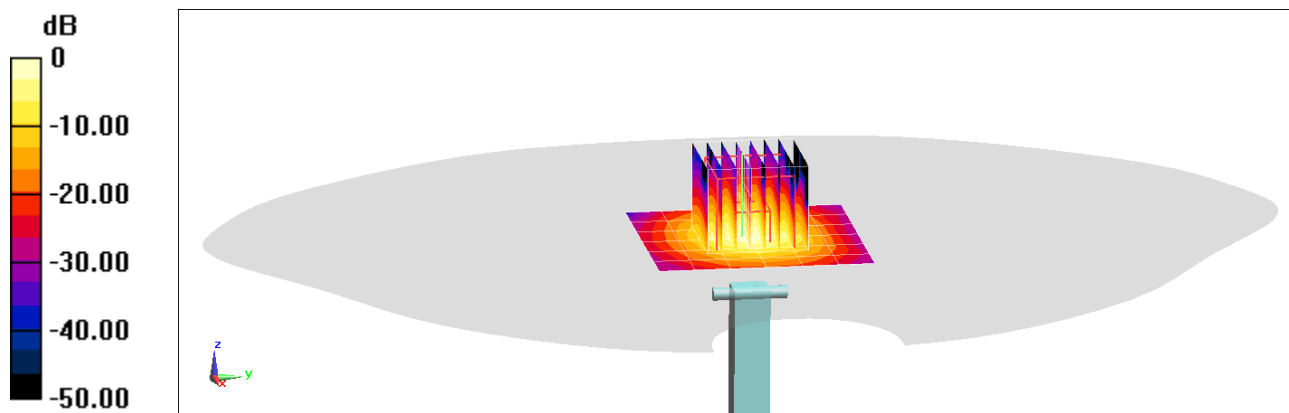

0 dB = 9.80 W/kg = 9.91 dBW/kg

PCTEST

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1123

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5GHz Body Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 5.876 \text{ S/m}$; $\epsilon_r = 48.52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-03-2020; Ambient Temp: 22.1°C; Tissue Temp: 18.5°C

Probe: EX3DV4 - SN7491; ConvF(4.32, 4.32, 4.32) @ 5750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1402; Calibrated: 7/10/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 3.84 W/kg; SAR(10 g) = 1.08 W/kg

Deviation(1 g) = 2.81%

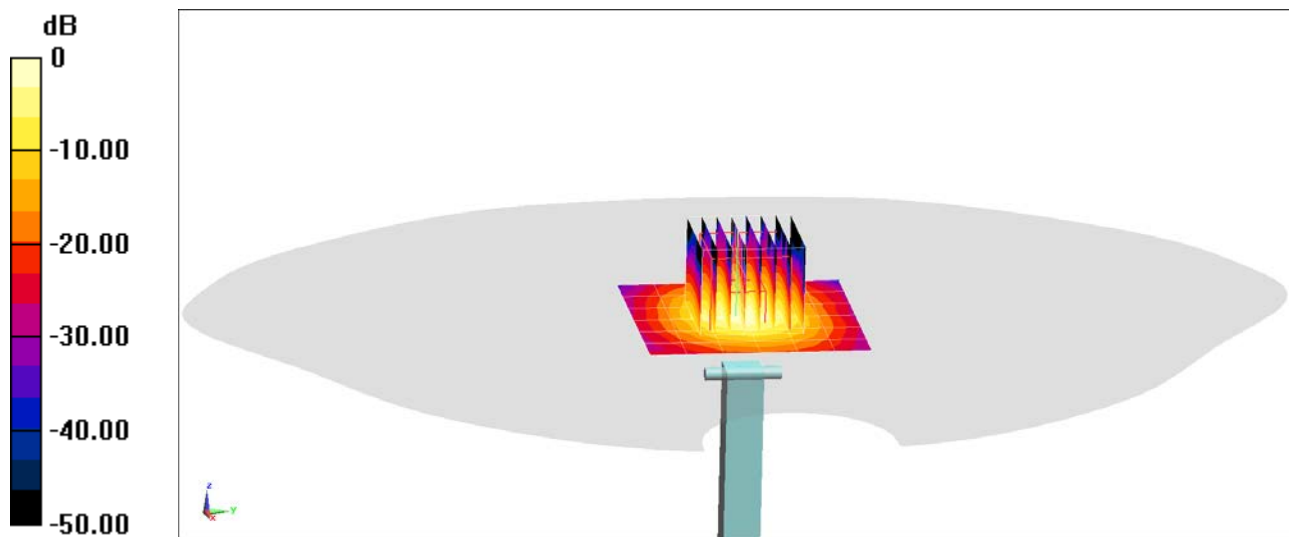

0 dB = 9.15 W/kg = 9.61 dBW/kg

APPENDIX C: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ' can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

3 Composition / Information on ingredients

3.2 Mixtures

Description: Aqueous solution with surfactants and inhibitors

Declarable, or hazardous components:

CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	Ethanediol STOT RE 2, H373; Acute Tox. 4, H302	>1.0-4.9%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	Sodium petroleum sulfonate Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	Alkoxylated alcohol, > C₁₆ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

Additional information:

For the wording of the listed risk phrases refer to section 16.
Not mentioned CAS-, EINECS- or registration numbers are to be regarded as Proprietary/Confidential.
The specific chemical identity and/or exact percentage concentration of proprietary components is withheld as a trade secret.

Figure C-1

Note: Liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

FCC ID: BCGA2229	 PCTEST	SAR EVALUATION REPORT	Approved by: Quality Manager
Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device		APPENDIX C: Page 1 of 2

Measurement Certificate / Material Test

Item Name **Body Tissue Simulating Liquid (MBBL600-6000V6)**
 Product No. **SL AAM U16 BC (Batch: 181029-1)**
 Manufacturer **SPEAG**

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Target Parameters

Target parameters as defined in the KDB 865664 compliance standard.

Test Condition



Ambient Condition **22°C ; 30% humidity**
 TSL Temperature **22°C**
 Test Date **30-Oct-18**
 Operator **CL**

Additional Information

TSL Density
 TSL Heat-capacity

Results

f [MHz]	Measured			Target		Diff. to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
800	55.1	21.3	0.95	55.3	0.97	-0.4	-2.1
825	55.1	20.8	0.98	55.2	0.98	-0.3	-2.0
835	55.1	20.6	0.98	55.1	0.99	0.0	-2.5
850	55.1	20.4	0.98	55.2	0.99	-0.1	-3.0
900	55.0	19.7	0.98	55.0	1.05	0.0	-6.7
1400	54.2	15.6	1.22	54.1	1.28	0.2	-4.7
1450	54.1	15.4	1.24	54.0	1.30	0.2	-4.6
1500	54.1	15.3	1.27	53.9	1.33	0.3	-4.5
1550	54.0	15.1	1.30	53.9	1.36	0.2	-4.4
1600	53.9	15.0	1.33	53.8	1.39	0.2	-4.3
1625	53.9	14.9	1.35	53.8	1.41	0.3	-4.3
1640	53.9	14.9	1.36	53.7	1.42	0.3	-4.2
1650	53.8	14.9	1.36	53.7	1.43	0.2	-4.9
1700	53.8	14.8	1.40	53.6	1.46	0.4	-4.1
1750	53.7	14.7	1.43	53.4	1.49	0.5	-4.0
1800	53.7	14.6	1.46	53.3	1.52	0.8	-3.9
1810	53.7	14.6	1.47	53.3	1.52	0.8	-3.3
1825	53.7	14.6	1.48	53.3	1.52	0.8	-2.6
1850	53.6	14.5	1.50	53.3	1.52	0.6	-1.3
1900	53.5	14.5	1.53	53.3	1.52	0.4	0.7
1950	53.5	14.5	1.57	53.3	1.52	0.4	3.3
2000	53.4	14.4	1.60	53.3	1.52	0.2	5.3
2050	53.4	14.4	1.64	53.2	1.57	0.3	4.5
2100	53.3	14.4	1.68	53.2	1.62	0.2	3.7
2150	53.3	14.4	1.72	53.1	1.66	0.4	3.6
2200	53.2	14.4	1.76	53.0	1.71	0.3	2.9
2250	53.1	14.4	1.81	53.0	1.76	0.2	2.8
2300	53.1	14.4	1.85	52.9	1.81	0.4	2.2
2350	53.0	14.5	1.89	52.8	1.85	0.3	2.2
2400	52.9	14.5	1.94	52.8	1.90	0.2	2.1
2450	52.9	14.5	1.98	52.7	1.95	0.4	1.5
2500	52.8	14.6	2.03	52.6	2.02	0.3	0.5
2550	52.7	14.6	2.07	52.6	2.09	0.2	-1.0
2600	52.6	14.7	2.12	52.5	2.16	0.2	-1.9

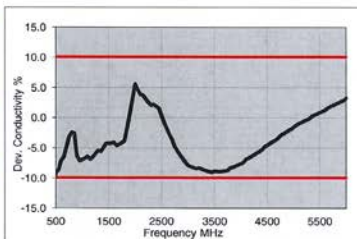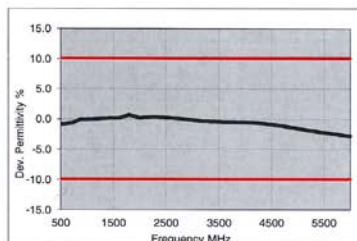

3500	51.1	15.5	3.02	51.3	3.31	-0.4	-8.8
3700	50.8	15.7	3.24	51.1	3.55	-0.5	-8.8
5200	48.1	18.2	5.27	49.0	5.30	-1.8	-0.6
5250	48.0	18.3	5.34	49.0	5.36	-1.9	-0.4
5300	47.9	18.4	5.41	48.9	5.42	-2.0	-0.2
5500	47.5	18.6	5.70	48.6	5.65	-2.2	0.8
5600	47.3	18.8	5.84	48.5	5.77	-2.3	1.3
5700	47.1	18.9	5.99	48.3	5.88	-2.5	1.8
5800	47.0	19.0	6.14	48.2	6.00	-2.6	2.3

TSL Dielectric Parameters

1

Figure C-2
 600 – 5800 MHz Body Tissue Equivalent Matter

FCC ID: BCGA2229		SAR EVALUATION REPORT	Approved by: Quality Manager
Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device		APPENDIX C: Page 2 of 2

APPENDIX D: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table D-1
SAR System Validation Summary – 1g

SAR System	Freq.(MHz)	Date	Probe SN	Probe Cal Point		Cond.(σ)	Perm.(εr)	CW VALIDATION			MOD. VALIDATION		
								SENSITIVITY	ROBE LINEARITY	ROBE ISOTROPY	MOD.TYPE	DUTYFACTOR	PAR
AM4	2450	4/23/2019	7532	2450	Body	2.027	50.762	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
AM5	5250	8/27/2019	7491	5250	Body	5.352	47.481	PASS	PASS	PASS	OFDM	N/A	PASS
AM5	5600	8/14/2019	7491	5600	Body	5.897	46.808	PASS	PASS	PASS	OFDM	N/A	PASS
AM5	5750	8/14/2019	7491	5750	Body	6.122	46.512	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

FCC ID: BCGA2229	 PCTEST	SAR EVALUATION REPORT	Approved by: Quality Manager
Test Dates: 12/18/2019 – 01/19/2020	DUT Type: Tablet Device		APPENDIX D: Page 1 of 1

APPENDIX F: IEEE 802.11AX RU SAR EXCLUSION

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 1 of 14

1.1 IEEE 802.11ax RU SAR Exclusion

To make the most efficient use of the additional available subcarriers (data tones), IEEE 802.11ax can utilize Orthogonal Frequency-Division Multiple Access (OFDMA) which divides the existing 802.11 channels into smaller subchannels called Resource Units (RUs). Possible RU sizes are: 26T, 52T, 106T, 242T, 484T and 996T.

Per FCC Guidance, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values. Per FCC Guidance, maximum conducted powers were performed for each RU size to demonstrate that the output powers would not be higher than the other OFDM 802.11 modes.

1.2 IEEE 802.11ax RU Target Powers

1.2.1 Maximum 802.11ax RU WLAN Output Power

A. Antenna 2A

Mode/ Band		Tones	26T		52T		106T		242T	
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm) - Antenna WF7	20 MHz Bandwidth	1	13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50
		2	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		3	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		4	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		5	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		6	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		7	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		8	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		9	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		10	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50
		11	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
		12	8.50	7.00	8.50	7.00	8.50	7.00	8.50	7.00
		13	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Mode/ Band		Tones	26T		52T		106T		242T	
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - 2 Tx Chain (dBm) - Antenna WF7	20 MHz Bandwidth	1	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50
		2	15.50	14.00	15.50	14.00	15.50	14.00	15.50	14.00
		3	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		4	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		5	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		6	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		7	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		8	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		9	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		10	13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50
		11	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00
		12	6.50	5.00	6.50	5.00	6.50	5.00	6.50	5.00
		13	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note: In MIMO operations, Antenna 2A transmits at maximum allowed powers at indicated above.

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 2 of 14

B. Antenna 4A

Mode/ Band		Tones	26T		52T		106T		242T	
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm) - Antenna WF8	20 MHz Bandwidth	1	13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50
		2	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00
		3	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		4	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		5	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		6	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		7	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		8	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		9	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		10	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50
		11	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
		12	8.50	7.00	8.50	7.00	8.50	7.00	8.50	7.00
		13	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Mode/ Band		Tones	26T		52T		106T		242T	
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - 2 Tx Chain (dBm) - Antenna WF8	20 MHz Bandwidth	1	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50
		2	15.50	14.00	15.50	14.00	15.50	14.00	15.50	14.00
		3	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		4	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		5	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		6	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		7	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		8	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		9	17.50	16.00	17.50	16.00	17.50	16.00	17.50	16.00
		10	13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50
		11	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00
		12	6.50	5.00	6.50	5.00	6.50	5.00	6.50	5.00
		13	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note: In MIMO operations, Antenna 4A transmits at maximum allowed powers at indicated above.

A. 5GHz ANTlower

Mode/ Band		Tones	26T		52T		106T		242T		484T		996T	
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm) - 5GHz ANTlower	20 MHz Bandwidth	36	12.00	10.50	15.00	13.50	16.00	14.50	16.00	14.50				
		40	12.00	10.50	15.00	13.50	17.50	16.00	17.50	16.00				
		44	12.00	10.50	15.00	13.50	17.50	16.00	17.50	16.00				
		48	12.00	10.50	15.00	13.50	17.50	16.00	17.50	16.00				
		52	12.00	10.50	15.00	13.50	16.25	14.75	16.25	14.75				
		56	12.00	10.50	15.00	13.50	16.25	14.75	16.25	14.75				
		60	12.00	10.50	15.00	13.50	16.25	14.75	16.25	14.75				
		64	12.00	10.50	14.50	13.00	14.50	13.00	14.50	13.00				
		100	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50				
		104	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		108	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		112	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		116	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		120	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		124	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		128	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		132	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		136	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		140	12.00	10.50	12.50	11.00	12.50	11.00	12.50	11.00				
		144	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25				
		149	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50				
		153	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50				
		157	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50				
		161	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50				
		165	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50				
	40 MHz Bandwidth	38	12.00	10.50	13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50		
		46	12.00	10.50	15.00	13.50	17.50	16.00	17.50	16.00				
		54	12.00	10.50	15.00	13.50	16.25	14.75	16.25	14.75	16.25	14.75		
		62	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50		
		102	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00		
		110	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25	15.75	14.25		
		118	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25	15.75	14.25		
		126	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25	15.75	14.25		
		134	12.00	10.50	15.00	13.50	15.50	14.00	15.50	14.00	15.50	14.00		
		142	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25	15.75	14.25		
		151	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50		
	80 MHz Bandwidth	159	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50		
		42	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50
		58	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
		106	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
		122	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
		138	12.00	10.50	15.00	13.50	15.75	14.25	15.75	14.25	15.75	14.25	15.75	14.25
		155	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50

FCC ID: BCGA2229	 PCTEST	SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device		APPENDIX F: Page 3 of 14

Mode/ Band		Tones		26T		52T		106T		242T		484T		996T	
		Channel		Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - 2 Tx Chain (dBm) CDD - 5GHz ANTlower	20 MHz Bandwidth	36	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		40	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		44	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		48	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		52	7.00	5.50	10.00	8.50	13.00	11.50	16.00	14.50					
		56	7.00	5.50	10.00	8.50	13.00	11.50	16.00	14.50					
		60	7.00	5.50	10.00	8.50	13.00	11.50	16.00	14.50					
		64	7.00	5.50	10.00	8.50	13.00	11.50	13.75	12.25					
		100	7.00	5.50	10.00	8.50	13.00	11.50	14.25	12.75					
		104	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		108	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		112	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		116	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		120	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		124	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		128	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		132	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		136	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		140	7.00	5.50	10.00	8.50	10.50	9.00	10.50	9.00					
		144	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25					
		149	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
		153	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
		157	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
		161	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
		165	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
	40 MHz Bandwidth	38	8.00	6.50	11.00	9.50	12.00	10.50	12.00	10.50	12.00	10.50			
		46	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50	17.50	16.00			
		54	7.00	5.50	10.00	8.50	13.00	11.50	16.00	14.50	16.25	14.75			
		62	7.00	5.50	10.00	8.50	10.50	9.00	10.50	9.00	10.50	9.00			
		102	7.00	5.50	10.00	8.50	10.50	9.00	10.50	9.00	10.50	9.00			
		110	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25	15.75	14.25			
		118	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25	15.75	14.25			
		126	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25	15.75	14.25			
		134	7.00	5.50	10.00	8.50	13.00	11.50	14.00	12.50	14.00	12.50			
		142	7.00	5.50	10.00	8.50	13.00	11.50	10.50	9.00	15.75	14.25			
		151	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50			
		159	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50			
		42	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00	
		58	7.00	5.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	
		106	7.00	5.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	
		122	7.00	5.50	10.00	8.50	13.00	11.50	15.75	14.25	15.75	14.25	15.75	14.25	
		138	7.00	5.50	10.00	8.50	13.00	11.50	10.50	9.00	14.00	12.50	15.75	14.25	
		155	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	

Mode/ Band		Tones		26T		52T		106T		242T		484T		996T	
		Channel		Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - 2 Tx Chain (dBm) SDM - 5GHz ANTlower	20 MHz Bandwidth	36	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		40	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		44	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		48	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		52	8.00	6.50	11.00	9.50	14.00	12.50	16.25	14.75					
		56	8.00	6.50	11.00	9.50	14.00	12.50	16.25	14.75					
		60	8.00	6.50	11.00	9.50	14.00	12.50	16.25	14.75					
		64	8.00	6.50	11.00	9.50	13.75	12.25	13.75	12.25					
		100	8.00	6.50	11.00	9.50	14.00	12.50	14.25	12.75					
		104	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		108	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		112	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		116	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		120	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		124	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		128	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		132	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		136	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		140	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00					
		144	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25					
		149	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
		153	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
		157	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
		161	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
		165	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50					
	40 MHz Bandwidth	38	8.00	6.50	11.00	9.50	12.00	10.50	12.00	10.50	12.00	10.50			
		46	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50	17.50	16.00			
		54	8.00	6.50	11.00	9.50	14.00	12.50	16.25	14.75	16.25	14.75			
		62	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00			
		102	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00			
		110	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25	15.75	14.25			
		118	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25	15.75	14.25			
		126	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25	15.75	14.25			
		134	8.00	6.50	11.00	9.50	14.00	12.50	14.00	12.50	14.00	12.50			
		142	8.00	6.50	11.00	9.50	14.00	12.50	10.50	9.00	15.75	14.25			
		151	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50			
		159	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50	16.00	14.50			
		42	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00	
		58	8.00	6.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	
		106	8.00	6.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	
		122	8.00	6.50	11.00	9.50	14.00	12.50	15.75	14.25	15.75	14.25	15.75	14.25	
		138	8.00	6.50	11.00	9.50	14.00	12.50	10.50	9.00	14.00	12.50	15.75	14.25	
		155	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	

Note: In MIMO operations, 5GHz ANTlower transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

FCC ID: BCGA2229	
------------------	--

B. 5GHz ANTupper

Mode/ Band		Tones		26T		52T		106T		242T		484T		996T	
		Channel		Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
Modulated Average - Single Tx Chain (dBm) - 5GHz ANTupper	20 MHz Bandwidth	36	12.00	10.50	15.00	13.50	16.00	14.50	16.00	14.50	16.00				
		40	12.00	10.50	15.00	13.50	17.00	15.50	17.00	15.50					
		44	12.00	10.50	15.00	13.50	17.00	15.50	17.00	15.50					
		48	12.00	10.50	15.00	13.50	17.00	15.50	17.00	15.50					
		52	12.00	10.50	15.00	13.50	16.25	14.75	16.25	14.75					
		56	12.00	10.50	15.00	13.50	16.25	14.75	16.25	14.75					
		60	12.00	10.50	15.00	13.50	16.25	14.75	16.25	14.75					
		64	12.00	10.50	14.50	13.00	14.50	13.00	14.50	13.00					
		100	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		104	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		108	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		112	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		116	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		120	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		124	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		128	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		132	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		136	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		140	12.00	10.50	12.50	11.00	12.50	11.00	12.50	11.00					
		144	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50					
		149	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
		153	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
		157	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
		161	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
		165	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
	40 MHz Bandwidth	38	12.00	10.50	13.00	11.50	13.00	11.50	13.00	11.50	13.00	11.50			
		46	12.00	10.50	15.00	13.50	17.00	15.50	17.00	15.50	17.00	15.50			
		54	12.00	10.50	15.00	13.50	16.25	14.75	16.25	14.75	16.25	14.75			
		62	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50			
		102	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00			
		110	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50			
		118	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50			
		126	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50			
		134	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50			
		142	12.00	10.50	15.00	13.50	15.00	13.50	12.50	11.00	15.00	13.50			
		151	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00			
		159	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00			
	80 MHz Bandwidth	42	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50	
		58	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	
		106	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	
		122	12.00	10.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50	
		138	12.00	10.50	15.00	13.50	15.00	13.50	12.50	11.00	15.00	14.00	15.00	13.50	
		155	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	

Mode/ Band		Tones		26T		52T		106T		242T		484T		996T		
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal		
Modulated Average - 2 Tx Chain (dBm) CDD - 5GHz ANTupper	20 MHz Bandwidth	36	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50						
		40	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50						
		44	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50						
		48	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50						
		52	7.00	5.50	10.00	8.50	13.00	11.50	16.00	14.50						
		56	7.00	5.50	10.00	8.50	13.00	11.50	16.00	14.50						
		60	7.00	5.50	10.00	8.50	13.00	11.50	16.00	14.50						
		64	7.00	5.50	10.00	8.50	13.00	11.50	13.75	12.25						
		100	7.00	5.50	10.00	8.50	13.00	11.50	14.25	12.75						
		104	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		108	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		112	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		116	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		120	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		124	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		128	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		132	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		136	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		140	7.00	5.50	10.00	8.50	10.50	9.00	10.50	9.00						
		144	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50						
		149	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00						
		153	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00						
		157	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00						
		161	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00						
		165	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00						
	40 MHz Bandwidth	38	8.00	6.50	11.00	9.50	12.00	10.50	12.00	10.50	12.00	10.50				
		46	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50	17.00	15.50				
		54	7.00	5.50	10.00	8.50	13.00	11.50	16.00	14.50	16.25	14.75				
		62	7.00	5.50	10.00	8.50	10.50	9.00	10.50	9.00	10.50	9.00				
		102	7.00	5.50	10.00	8.50	10.50	9.00	10.50	9.00	10.50	9.00				
		110	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50	15.00	13.50				
		118	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50	15.00	13.50				
		126	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50	15.00	13.50				
		134	7.00	5.50	10.00	8.50	13.00	11.50	14.00	12.50	14.00	12.50				
		142	7.00	5.50	10.00	8.50	13.00	11.50	10.50	9.00	15.00	13.50				
		151	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00				
		159	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00				
	80 MHz Bandwidth	42	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00
		58	7.00	5.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50
		106	7.00	5.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50
		122	7.00	5.50	10.00	8.50	13.00	11.50	15.00	13.50	15.00	13.50	15.00	13.50	15.00	13.50
		138	7.00	5.50	10.00	8.50	13.00	11.50	10.50	9.00	14.00	12.50	15.00	13.50	15.00	13.50
155	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50		

Mode/ Band		Tones		26T		52T		106T		242T		484T		996T	
		Channel	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	
Modulated Average - 2 Tx Chain (dBm) SDM - 5GHz ANTupper	20 MHz Bandwidth	36	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		40	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		44	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		48	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50					
		52	8.00	6.50	11.00	9.50	14.00	12.50	16.25	14.75					
		56	8.00	6.50	11.00	9.50	14.00	12.50	16.25	14.75					
		60	8.00	6.50	11.00	9.50	14.00	12.50	16.25	14.75					
		64	8.00	6.50	11.00	9.50	13.75	12.25	13.75	12.25					
		100	8.00	6.50	11.00	9.50	14.00	12.50	14.25	12.75					
		104	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		108	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		112	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		116	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		120	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		124	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		128	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		132	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		136	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		140	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00					
		144	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50					
		149	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
		153	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
		157	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
		161	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
		165	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00					
	40 MHz Bandwidth	38	8.00	6.50	11.00	9.50	12.00	10.50	12.00	10.50	12.00	10.50			
		46	8.00	6.50	11.00	9.50	14.00	12.50	17.00	15.50	17.00	15.50			
		54	8.00	6.50	11.00	9.50	14.00	12.50	16.25	14.75	16.25	14.75			
		62	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00			
		102	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00			
		110	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50	15.00	13.50			
		118	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50	15.00	13.50			
		126	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50	15.00	13.50			
		134	8.00	6.50	11.00	9.50	14.00	12.50	14.00	12.50	14.00	12.50			
		142	8.00	6.50	11.00	9.50	14.00	12.50	10.50	9.00	15.00	13.50			
		151	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00			
		159	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00	16.50	15.00			
	80 MHz Bandwidth	42	8.00	6.50	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00	10.50	9.00	
		58	8.00	6.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	
		106	8.00	6.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50	
		122	8.00	6.50	11.00	9.50	14.00	12.50	15.00	13.50	15.00	13.50	15.00	13.50	
		138	8.00	6.50	11.00	9.50	14.00	12.50	10.50	9.00	14.00	12.50	15.00	13.50	
		155	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50	

Note: In MIMO operations, 5GHz ANTupper transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 6 of 14

1.3 IEEE 802.11ax Measured Powers

Table 1
Maximum 2.4 GHz 802.11ax RU Output Power – Ant WF7

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	26T	0	12.75	2412	1	52T	37	13.00
			4	12.78				38	13.00
			8	13.00				40	12.95
2417	2	26T	0	16.12	2417	2	52T	37	16.50
			4	16.21				38	16.50
			8	16.40				40	16.50
2422	3	26T	0	15.68	2422	3	52T	37	16.35
			4	16.33				38	16.50
			8	16.12				40	16.50
2437	6	26T	0	16.50	2437	6	52T	37	16.50
			4	16.28				38	16.45
			8	15.87				40	16.50
2452	9	26T	0	14.75	2452	9	52T	37	15.43
			4	16.38				38	15.29
			8	16.01				40	16.26
2457	10	26T	0	13.72	2457	10	52T	37	14.00
			4	13.73				38	13.84
			8	14.00				40	14.00
2462	11	26T	0	11.50	2462	11	52T	37	11.00
			4	11.22				38	11.00
			8	11.43				40	11.00
2467	12	26T	0	8.15	2467	12	52T	37	8.50
			4	8.33				38	8.50
			8	6.65				40	8.50

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 7 of 14

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	106T	53	12.74
			54	13.00
2417	2	106T	53	15.94
			54	16.34
2422	3	106T	53	16.06
			54	16.47
2437	6	106T	53	16.45
			54	16.22
2452	9	106T	53	15.65
			54	16.50
2457	10	106T	53	13.94
			54	14.00
2462	11	106T	53	11.03
			54	11.40
2467	12	106T	53	7.00
			54	6.40

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	242T	61	12.83
2417	2	242T	61	16.50
2422	3	242T	61	16.19
2437	6	242T	61	16.50
2452	9	242T	61	16.50
2457	10	242T	61	13.82
2462	11	242T	61	11.42
2467	12	242T	61	6.95

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 8 of 14

Table 2
Maximum 2.4 GHz 802.11ax RU Output Power – Ant WF8

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	26T	0	12.85	2412	1	52T	37	12.47
			4	12.92				38	12.56
			8	12.81				40	12.48
2417	2	26T	0	15.84	2417	2	52T	37	16.03
			4	15.86				38	16.01
			8	16.43				40	16.29
2422	3	26T	0	16.83	2422	3	52T	37	16.92
			4	17.42				38	17.16
			8	17.41				40	17.42
2437	6	26T	0	17.50	2437	6	52T	37	16.79
			4	17.11				38	17.13
			8	17.06				40	17.31
2452	9	26T	0	15.70	2452	9	52T	37	15.60
			4	17.40				38	16.48
			8	17.20				40	17.37
2457	10	26T	0	13.60	2457	10	52T	37	13.31
			4	13.59				38	13.60
			8	13.85				40	13.35
2462	11	26T	0	10.88	2462	11	52T	37	10.97
			4	10.83				38	10.99
			8	11.44				40	10.57
2467	12	26T	0	8.43	2467	12	52T	37	8.19
			4	8.36				38	8.48
			8	7.70				40	7.75

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 9 of 14

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	106T	53	12.96
			54	13.00
2417	2	106T	53	16.01
			54	16.14
2422	3	106T	53	17.04
			54	17.32
2437	6	106T	53	17.47
			54	17.14
2452	9	106T	53	16.38
			54	17.46
2457	10	106T	53	13.82
			54	14.00
2462	11	106T	53	10.92
			54	11.50
2467	12	106T	53	7.00
			54	6.27

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	242T	61	12.96
2417	2	242T	61	16.27
2422	3	242T	61	17.29
2437	6	242T	61	17.49
2452	9	242T	61	17.48
2457	10	242T	61	13.98
2462	11	242T	61	11.50
2467	12	242T	61	6.89

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 10 of 14

Table 3
Maximum 5 GHz 802.11ax RU Output Power – 5GHz ANTlower

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	4	8						37	39	40
	1	5180	36	26T	11.53	11.94	11.87		1	5180	36	52T	14.66	15.00	14.89
		5200	40	26T	11.55	11.90	11.80			5200	40	52T	14.86	15.00	15.00
		5240	48	26T	11.54	11.96	11.89			5240	48	52T	14.51	14.86	14.76
	2A	5260	52	26T	11.56	11.97	11.85		2A	5260	52	52T	14.55	14.89	14.89
		5300	60	26T	11.52	11.91	11.78			5300	60	52T	14.76	15.00	15.00
		5320	64	26T	11.47	11.76	11.84			5320	64	52T	14.10	14.50	14.43
	2C	5500	100	26T	11.31	11.74	11.62		2C	5500	100	52T	14.79	15.00	15.00
5520		104	26T	11.20	11.63	11.63	5520	104		52T	14.75	15.00	15.00		
5580		116	26T	11.53	11.90	11.86	5580	116		52T	14.71	14.99	15.00		
5660		132	26T	11.41	11.88	11.78	5660	132		52T	14.85	15.00	15.00		
5680		136	26T	11.32	11.74	11.74	5680	136		52T	14.63	15.00	14.99		
5700		140	26T	11.56	11.94	11.88	5700	140		52T	12.31	12.50	12.50		
5720		144	26T	11.53	11.91	11.77	5720	144		52T	14.91	15.00	15.00		
3	5745	149	26T	15.67	15.97	15.89	3	5745	149	52T	15.81	16.00	16.00		
	5785	157	26T	15.71	16.00	15.82		5785	157	52T	15.93	16.00	16.00		
	5825	165	26T	15.71	15.98	15.83		5825	165	52T	16.00	16.00	16.00		

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	N/A						61	N/A	N/A
1	1	5180	36	106T	16.00	16.00		1	5180	36	242T	15.87			
		5200	40	106T	17.30	17.44			5200	40	242T	16.99			
		5240	48	106T	17.39	17.42			5240	48	242T	16.89			
	2A	5260	52	106T	15.93	16.20		2A	5260	52	242T	16.25			
		5300	60	106T	16.00	16.19			5300	60	242T	16.25			
		5320	64	106T	14.41	14.42			5320	64	242T	14.50			
	2C	5500	100	106T	15.00	14.98		2C	5500	100	242T	14.88			
		5520	104	106T	15.49	15.61			5520	104	242T	14.91			
		5580	116	106T	15.46	15.75			5580	116	242T	15.00			
		5660	132	106T	15.74	15.75			5660	132	242T	15.75			
		5680	136	106T	15.41	15.54			5680	136	242T	14.99			
		5700	140	106T	12.31	12.50			5700	140	242T	12.35			
		5720	144	106T	15.70	15.70			5720	144	242T	15.00			
	3	5745	149	106T	15.25	15.42		3	5745	149	242T	16.00			
		5785	157	106T	15.82	16.00			5785	157	242T	15.99			
		5825	165	106T	15.89	15.99			5825	165	242T	15.74			

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	8	17						37	40	44
	1	5190	38	26T	11.15	11.98	11.34		1	5190	38	52T	12.57	13.00	12.60
2A	5230	46	26T	11.74	11.69	11.92	2A	5230	46	52T	14.96	14.97	15.00		
	5270	54	26T	11.65	11.76	12.00	5270	54	52T	14.85	15.00	14.86			
	5310	62	26T	11.49	11.96	11.92	5310	62	52T	11.86	11.87	11.81			
2C	5510	102	26T	11.25	11.50	11.48	2C	5510	102	52T	11.26	11.45	11.50		
	5550	110	26T	11.68	11.86	12.00	5550	110	52T	14.72	14.94	14.85			
	5590	118	26T	11.65	11.85	12.00	5590	118	52T	15.00	15.00	15.00			
	5630	126	26T	11.98	12.00	12.00	5630	126	52T	15.00	15.00	15.00			
	5670	134	26T	11.63	11.83	12.00	5670	134	52T	14.88	15.00	15.00			
3	5710	142	26T	11.72	11.67	11.91	3	5710	142	52T	14.87	14.99	15.00		
	5755	151	26T	15.10	15.31	15.41	5755	151	52T	16.00	16.00	16.00			
	5795	159	26T	15.45	15.58	15.54	5795	159	52T	15.92	16.00	15.93			

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 11 of 14

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	56						61	62	N/A
	1	5190	38	106T	12.60	12.99	12.88		1	5190	38	242T	12.88	12.89	
		5230	46	106T	17.10	17.20	17.40			5230	46	242T	17.17	17.21	
	2A	5270	54	106T	16.14	16.25	16.25		2A	5270	54	242T	16.21	16.23	
		5310	62	106T	11.98	12.00	12.00			5310	62	242T	11.95	12.00	
	2C	5510	102	106T	11.46	11.50	11.50		2C	5510	102	242T	11.41	11.50	
		5550	110	106T	15.34	15.70	15.65			5550	110	242T	15.66	15.68	
		5590	118	106T	15.43	15.62	15.75			5590	118	242T	15.73	15.69	
		5630	126	106T	15.56	15.75	15.68			5630	126	242T	15.75	15.75	
		5670	134	106T	15.17	15.33	15.45			5670	134	242T	15.50	15.50	
		5710	142	106T	15.52	15.67	15.75			5710	142	242T	12.48	12.49	
	3	5755	151	106T	15.78	15.83	16.00		3	5755	151	242T	15.99	16.00	
		5795	159	106T	15.88	15.93	16.00			5795	159	242T	15.79	15.92	

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					65	N/A	N/A
	1	5190	38	484T	12.88		
		5230	46	484T	17.00		
	2A	5270	54	484T	16.25		
		5310	62	484T	11.95		
	2C	5510	102	484T	11.50		
		5550	110	484T	15.00		
		5590	118	484T	15.00		
		5630	126	484T	15.75		
		5670	134	484T	15.00		
		5710	142	484T	15.00		
	3	5755	151	484T	16.00		
		5795	159	484T	16.00		

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	18	36						37	44	52
	1	5210	42	26T	11.06	11.65	11.12		1	5210	42	52T	11.57	11.92	11.71
2A	5290	58	26T	10.51	10.82	10.27	2A	5290	58	52T	10.74	11.00	10.90		
	5530	106	26T	10.42	10.92	10.38	5530	106	52T	10.77	11.00	10.99			
2C	5610	122	26T	11.35	11.98	11.47	2C	5610	122	52T	14.45	14.93	14.79		
	5690	138	26T	11.42	11.94	11.55	5690	138	52T	14.89	15.00	15.00			
3	5775	155	26T	15.76	16.00	15.55	3	5775	155	52T	15.68	15.94	15.72		

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	56	60						61	62	64
	1	5210	42	106T	11.68	11.94	11.75		1	5210	42	242T	11.81	12.00	11.63
2A	5290	58	106T	10.88	11.00	10.90	2A	5290	58	242T	10.89	11.00	10.69		
	5530	106	106T	10.89	11.00	11.00	5530	106	242T	10.72	11.00	10.76			
2C	5610	122	106T	15.42	15.62	15.55	2C	5610	122	242T	15.68	15.75	15.54		
	5690	138	106T	15.40	15.75	15.57	5690	138	242T	12.00	12.50	11.97			
3	5775	155	106T	15.78	15.97	15.78	3	5775	155	242T	16.00	16.00	15.89		

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					65	66	N/A						67	N/A	N/A
	1	5210	42	484T	10.50	10.49			1	5210	42	996T	11.97		
2A	5290	58	484T	10.55	10.50		2A	5290	58	996T	10.95				
	5530	106	484T	10.50	10.57		2C	5530	106	996T	10.92				
	5610	122	484T	15.75	15.75			5610	122	996T	14.90				
	5690	138	484T	15.26	15.35			5690	138	996T	15.00				
3	5775	155	484T	15.33	15.47		3	5775	155	996T	15.99				

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 12 of 14

Table 4
Maximum 5 GHz 802.11ax RU Output Power – 5GHz ANTupper

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					0	4	8
	1	5180	36	26T	11.32	11.81	11.98
		5200	40	26T	11.00	11.79	11.90
		5240	48	26T	11.30	11.80	11.95
	2A	5260	52	26T	11.34	11.79	11.90
		5300	60	26T	11.39	11.91	12.00
		5320	64	26T	11.36	11.84	11.85
	2C	5500	100	26T	11.59	11.88	11.69
		5520	104	26T	11.56	11.87	11.71
		5580	116	26T	11.72	11.97	11.75
		5660	132	26T	11.75	11.98	11.69
		5680	136	26T	11.65	11.96	11.76
		5700	140	26T	11.74	12.00	11.82
		5720	144	26T	11.74	11.94	11.76
	3	5745	149	26T	16.21	16.49	16.34
		5785	157	26T	16.11	16.44	16.26
		5825	165	26T	16.22	16.50	16.42

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					37	39	40
	1	5180	36	52T	14.11	14.78	14.93
		5200	40	52T	14.10	14.74	14.94
		5240	48	52T	14.11	14.64	14.69
	2A	5260	52	52T	14.22	14.78	14.84
		5300	60	52T	14.29	14.87	14.90
		5320	64	52T	13.79	14.29	14.35
	2C	5500	100	52T	14.36	14.67	14.58
		5520	104	52T	14.27	14.57	14.60
		5580	116	52T	14.35	14.55	14.38
		5660	132	52T	14.51	14.65	14.49
		5680	136	52T	14.42	14.68	14.63
		5700	140	52T	11.81	12.02	11.88
		5720	144	52T	14.28	14.42	14.40
	3	5745	149	52T	15.85	16.14	16.00
		5785	157	52T	15.92	16.35	16.24
		5825	165	52T	15.72	16.12	15.99

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					53	54	N/A
	1	5180	36	106T	15.82	15.95	
		5200	40	106T	16.15	16.86	
		5240	48	106T	16.56	16.95	
	2A	5260	52	106T	16.12	16.12	
		5300	60	106T	15.76	16.09	
		5320	64	106T	14.30	14.38	
	2C	5500	100	106T	14.94	14.98	
		5520	104	106T	14.80	14.96	
		5580	116	106T	14.60	14.74	
		5660	132	106T	14.72	14.89	
		5680	136	106T	14.78	14.87	
		5700	140	106T	12.43	12.48	
		5720	144	106T	14.25	14.47	
	3	5745	149	106T	16.43	16.47	
		5785	157	106T	16.48	16.42	
		5825	165	106T	16.46	16.44	

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					61	N/A	N/A
	1	5180	36	242T	16.00		
		5200	40	242T	16.95		
		5240	48	242T	17.00		
	2A	5260	52	242T	16.22		
		5300	60	242T	16.25		
		5320	64	242T	14.50		
	2C	5500	100	242T	15.00		
		5520	104	242T	15.00		
		5580	116	242T	15.00		
		5660	132	242T	14.67		
		5680	136	242T	15.00		
		5700	140	242T	12.42		
		5720	144	242T	14.89		
	3	5745	149	242T	16.44		
		5785	157	242T	16.41		
		5825	165	242T	16.50		

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					0	8	17
	1	5190	38	26T	11.03	11.87	11.49
		5230	46	26T	11.45	11.82	11.96
		5270	54	26T	11.61	11.88	12.00
	2A	5310	62	26T	11.12	11.80	11.83
	2C	5510	102	26T	11.23	11.27	11.45
		5550	110	26T	11.95	11.89	12.00
		5590	118	26T	11.95	11.85	12.00
		5630	126	26T	12.00	11.98	12.00
		5670	134	26T	11.98	11.96	12.00
		5710	142	26T	11.92	11.94	12.00
		5755	151	26T	16.30	16.15	16.48
	3	5795	159	26T	16.35	16.45	16.48

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					37	40	44
	1	5190	38	52T	12.15	13.00	12.79
		5230	46	52T	14.44	14.80	15.00
		5270	54	52T	14.65	14.94	15.00
	2A	5310	62	52T	11.53	12.00	12.00
	2C	5510	102	52T	11.41	11.50	11.50
		5550	110	52T	15.00	15.00	15.00
		5590	118	52T	15.00	15.00	15.00
		5630	126	52T	14.90	14.87	15.00
		5670	134	52T	15.00	14.97	15.00
		5710	142	52T	14.97	14.99	15.00
		5755	151	52T	16.22	16.50	16.50
	3	5795	159	52T	16.28	16.40	16.50

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 13 of 14

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					53	54	56
	1	5190	38	106T	12.50	13.00	12.78
		5230	46	106T	17.00	17.00	17.00
	2A	5270	54	106T	16.03	16.25	16.25
		5310	62	106T	11.75	12.00	12.00
		5510	102	106T	11.50	11.50	11.49
		5550	110	106T	15.00	15.00	15.00
	2C	5590	118	106T	15.00	15.00	15.00
		5630	126	106T	15.00	15.00	15.00
		5670	134	106T	15.00	15.00	15.00
		5710	142	106T	15.00	15.00	15.00
	3	5755	151	106T	16.50	16.50	16.43
		5795	159	106T	16.50	16.50	16.48

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					61	62	N/A
	1	5190	38	242T	12.81	12.89	
		5230	46	242T	16.66	16.84	
	2A	5270	54	242T	16.24	16.16	
		5310	62	242T	11.96	12.00	
		5510	102	242T	11.47	11.50	
		5550	110	242T	15.00	15.00	
	2C	5590	118	242T	15.00	15.00	
		5630	126	242T	15.00	15.00	
		5670	134	242T	14.95	14.93	
		5710	142	242T	12.50	12.50	
	3	5755	151	242T	16.42	16.49	
		5795	159	242T	16.28	16.33	

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					65	N/A	N/A
	1	5190	38	484T	12.99		
		5230	46	484T	16.94		
	2A	5270	54	484T	16.18		
		5310	62	484T	11.02		
		5510	102	484T	11.40		
		5550	110	484T	14.99		
	2C	5590	118	484T	14.97		
		5630	126	484T	15.00		
		5670	134	484T	14.63		
		5710	142	484T	14.99		
	3	5755	151	484T	16.46		
		5795	159	484T	16.42		

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					0	18	36
	1	5210	42	26T	11.62	12.00	11.63
	2A	5290	58	26T	10.29	11.00	10.65
		5530	106	26T	10.61	10.82	10.42
	2C	5610	122	26T	11.95	12.00	11.78
		5690	138	26T	12.00	12.00	11.85
	3	5775	155	26T	16.31	16.45	16.05

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					53	56	60
	1	5210	42	106T	11.76	12.00	12.00
	2A	5290	58	106T	10.90	11.00	11.00
		5530	106	106T	10.69	10.82	10.78
	2C	5610	122	106T	14.90	15.00	14.96
		5690	138	106T	15.00	15.00	15.00
	3	5775	155	106T	16.50	16.50	16.44

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					65	66	N/A
	1	5210	42	484T	11.82	11.86	
	2A	5290	58	484T	10.84	10.98	
		5530	106	484T	10.91	11.00	
	2C	5610	122	484T	15.00	15.00	
		5690	138	484T	15.50	15.50	
	3	5775	155	484T	16.50	16.50	

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					37	44	52
	1	5210	42	52T	11.37	12.00	11.85
	2A	5290	58	52T	10.41	11.00	10.82
		5530	106	52T	10.82	10.91	10.92
	2C	5610	122	52T	14.80	15.00	14.90
		5690	138	52T	14.97	15.00	14.99
	3	5775	155	52T	16.50	16.50	16.39

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					61	62	64
	1	5210	42	242T	11.91	12.00	11.89
	2A	5290	58	242T	10.82	11.00	10.77
		5530	106	242T	10.41	10.83	10.54
	2C	5610	122	242T	14.82	15.00	14.71
		5690	138	242T	12.31	12.42	12.18
	3	5775	155	242T	16.37	16.50	16.35

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					67	N/A	N/A
	1	5210	42	996T	11.91		
	2A	5290	58	996T	10.81		
		5530	106	996T	10.99		
	2C	5610	122	996T	14.86		
		5690	138	996T	14.89		
	3	5775	155	996T	16.17		

FCC ID: BCGA2229	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 12/18/19 - 01/19/20	DUT Type: Tablet Device	APPENDIX F: Page 14 of 14

APPENDIX G: PROBE and DIPOLE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-921_Nov18**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:921**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

SC ✓
12/11/2018

Calibration date: **November 12, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	04-Oct-18 (No. DAE4-601_Oct18)	Oct-19
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by: **Manu Seitz** **Function**
Laboratory Technician

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: November 12, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.86 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.6 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.8 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.4 $\pm$ 6 %	2.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.03 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.8 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$54.7 \Omega + 6.5 j\Omega$
Return Loss	- 22.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$50.7 \Omega + 7.8 j\Omega$
Return Loss	- 22.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.157 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 26, 2013

DASY5 Validation Report for Head TSL

Date: 12.11.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:921

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.7 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 27.4 W/kg


SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.28 W/kg

Maximum value of SAR (measured) = 22.4 W/kg

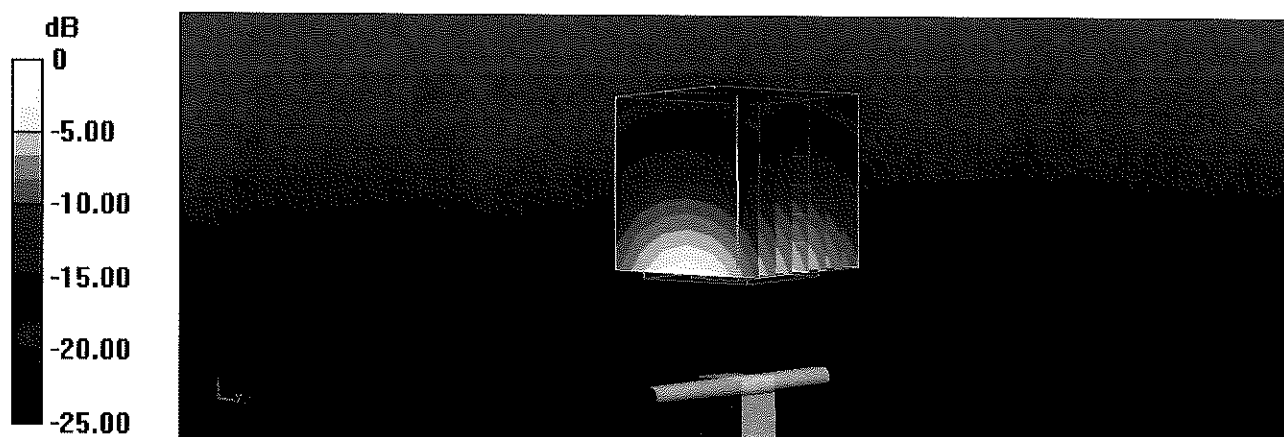

0 dB = 22.4 W/kg = 13.50 dBW/kg

Impedance Measurement Plot for Head TSL

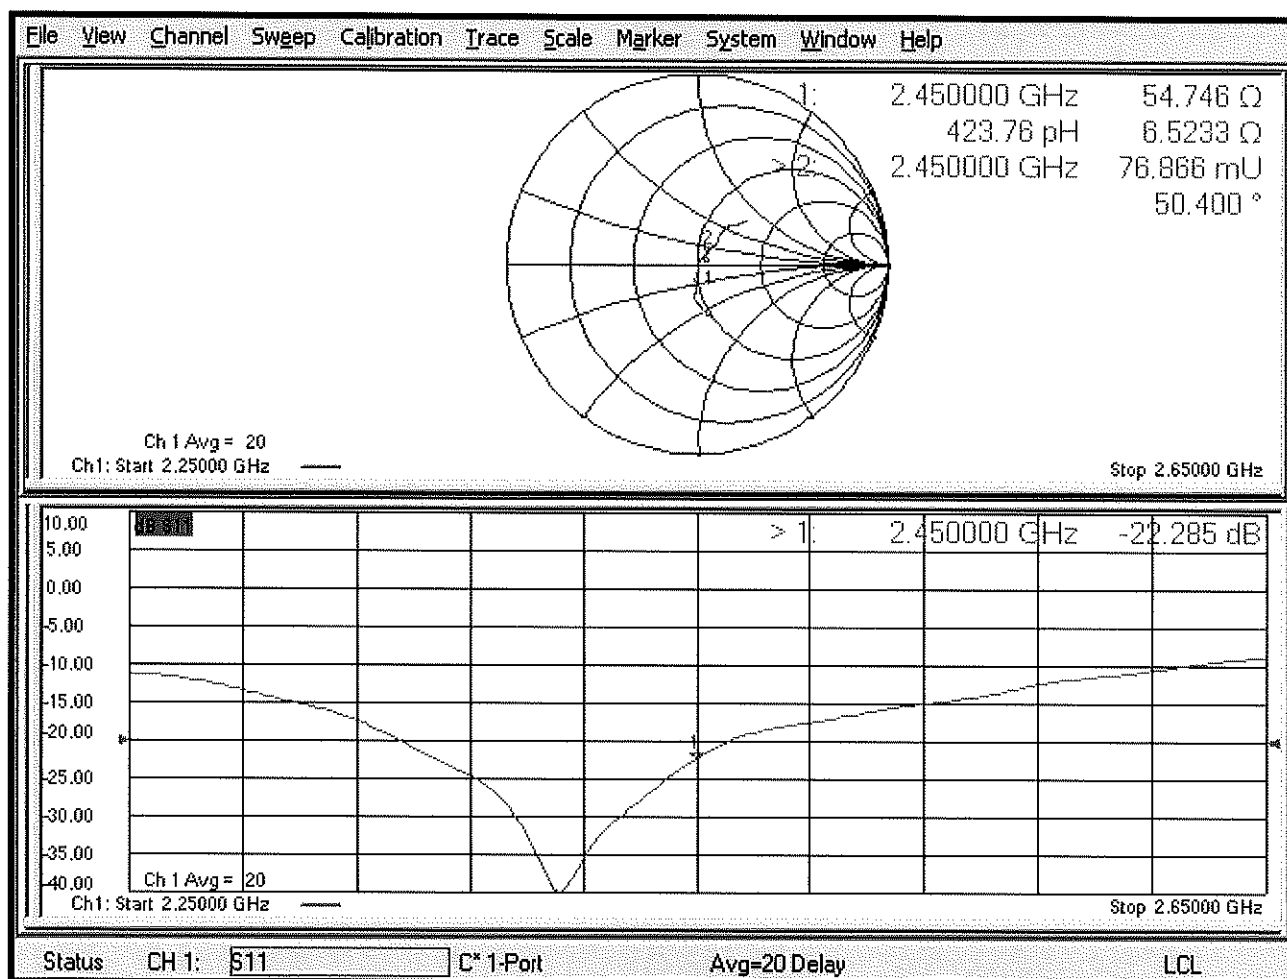

DASY5 Validation Report for Body TSL

Date: 12.11.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:921

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.01, 8.01, 8.01) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.6 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.1 W/kg


SAR(1 g) = 13 W/kg; SAR(10 g) = 6.03 W/kg

Maximum value of SAR (measured) = 21.3 W/kg

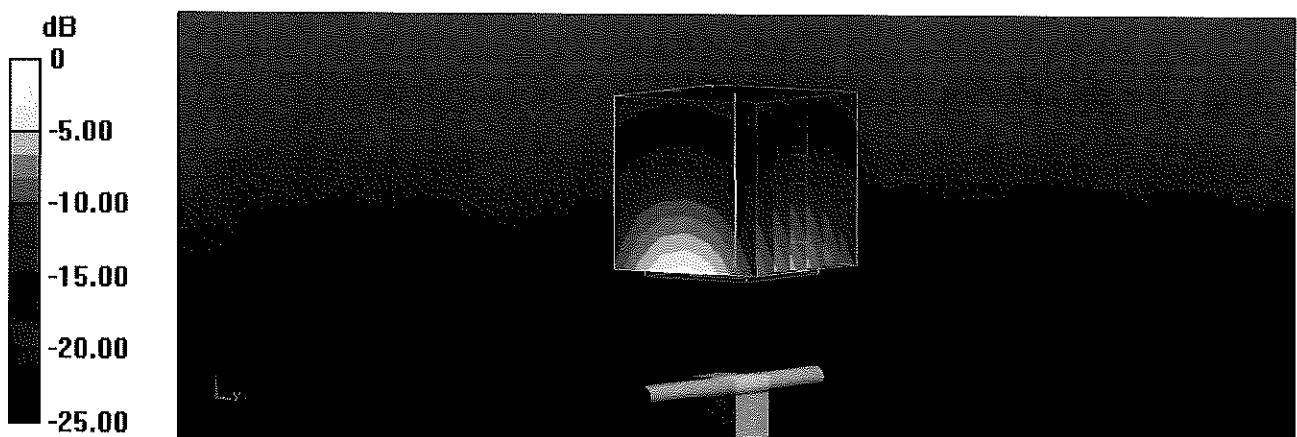

0 dB = 21.3 W/kg = 13.28 dBW/kg

Impedance Measurement Plot for Body TSL

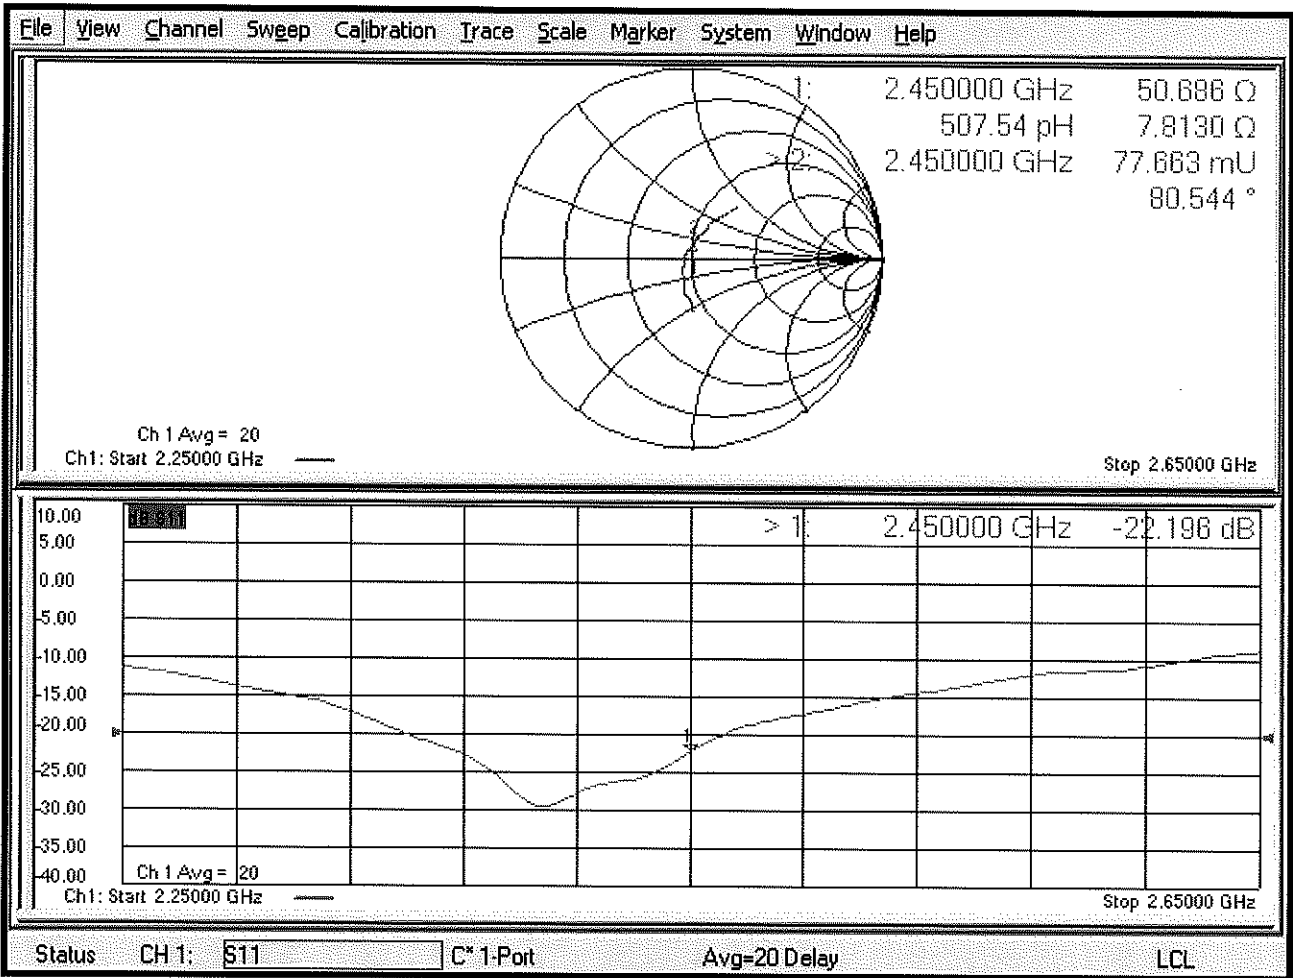



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1123_Mar18**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1123**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

SC ✓
 3/21/18

Calibration date: **March 13, 2018**

SC ✓
 3/12/19

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	30-Dec-17 (No. EX3-3503_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-16 (No. 217-02222)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-16 (No. 217-02222)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-16 (No. 217-02223)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: March 14, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.2 $\pm$ 6 %	4.58 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.6 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.7 $\pm$ 6 %	4.94 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.51 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.1 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.43 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.3 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.5 ± 6 %	5.10 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.1 ± 6 %	5.49 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.6 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.97 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.82 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.19 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.7 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	6.18 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.52 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.8 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	53.2 Ω - 5.2 j Ω
Return Loss	- 24.6 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	57.2 Ω - 0.4 j Ω
Return Loss	- 23.4 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	56.7 Ω + 0.9 j Ω
Return Loss	- 23.9 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	51.6 Ω - 4.3 j Ω
Return Loss	- 26.9 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	59.0 Ω - 0.3 j Ω
Return Loss	- 21.7 dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	57.8 Ω + 1.0 j Ω
Return Loss	- 22.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.205 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 08, 2011

DASY5 Validation Report for Head TSL

Date: 13.03.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1123

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.58$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.94$ S/m; $\epsilon_r = 35.7$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.1$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.51, 5.51, 5.51); Calibrated: 30.12.2017, ConvF(5.05, 5.05, 5.05); Calibrated: 30.12.2017, ConvF(4.98, 4.98, 4.98); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.12 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 18.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.34 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 8.51 W/kg; SAR(10 g) = 2.43 W/kg

Maximum value of SAR (measured) = 19.8 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.38 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 31.4 W/kg


SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

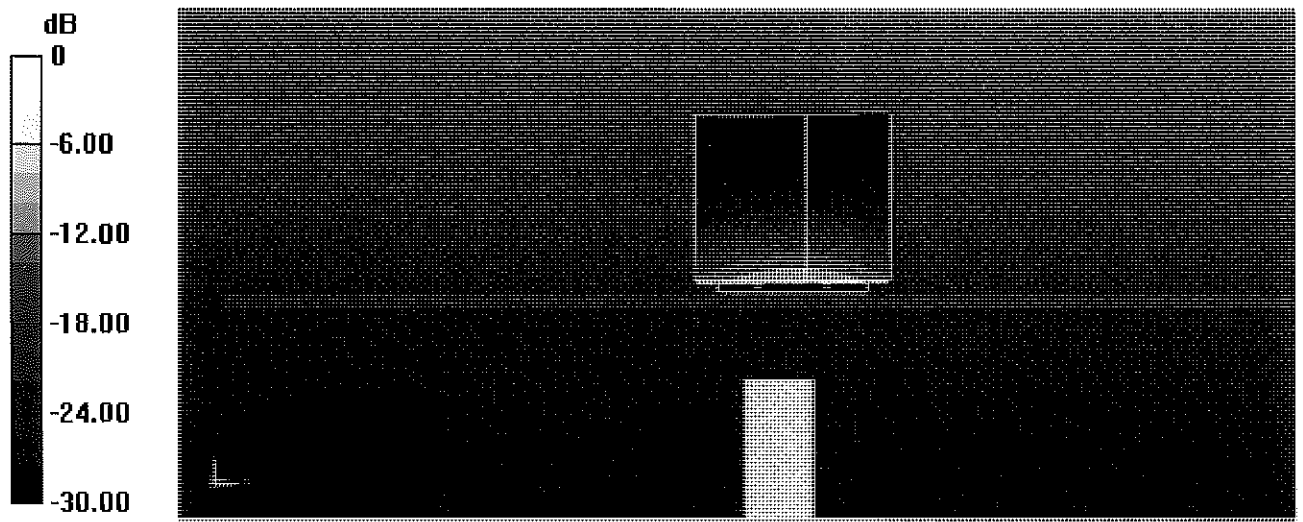

0 dB = 19.1 W/kg = 12.81 dBW/kg

Impedance Measurement Plot for Head TSL

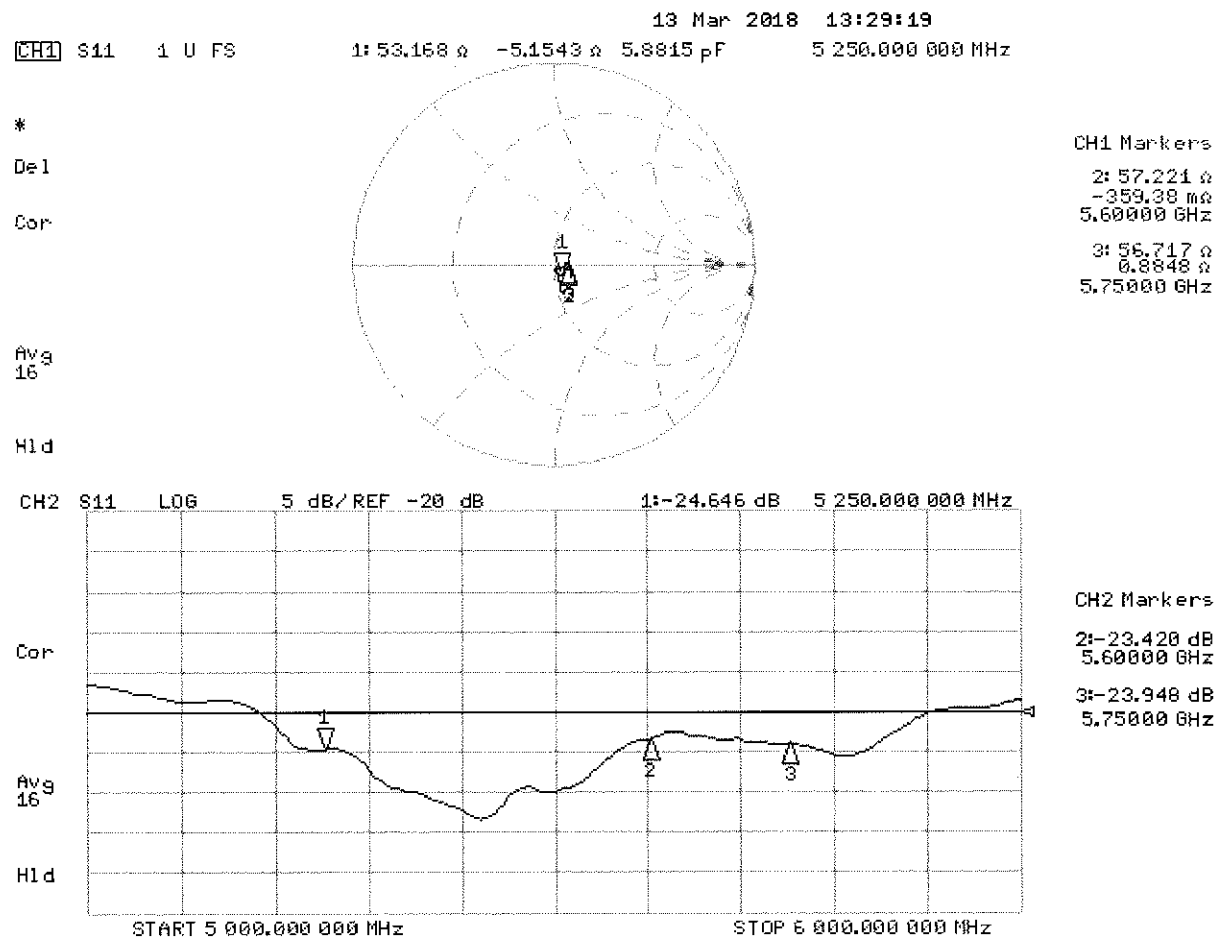

DASY5 Validation Report for Body TSL

Date: 12.03.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1123

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.49$ S/m; $\epsilon_r = 47.1$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.97$ S/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 6.18$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.26, 5.26, 5.26); Calibrated: 30.12.2017, ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2017, ConvF(4.57, 4.57, 4.57); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 63.35 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 7.45 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 63.20 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 32.5 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.19 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 61.74 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 7.52 W/kg; SAR(10 g) = 2.1 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

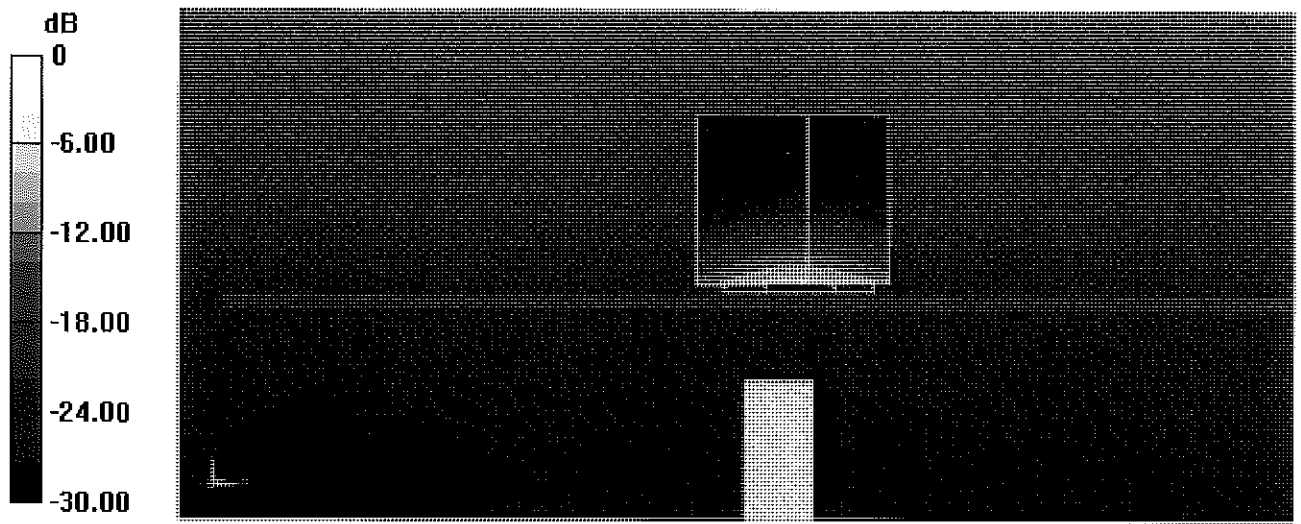

0 dB = 18.5 W/kg = 12.67 dBW/kg


Impedance Measurement Plot for Body TSL

12 Mar 2018 09:33:31
 CH1 S11 1 U FS 3: 57.789 Ω 1.0371 Ω 28.706 pH 5 750.000 000 MHz

*
 Del
 Cor

Avg
 16

H1d

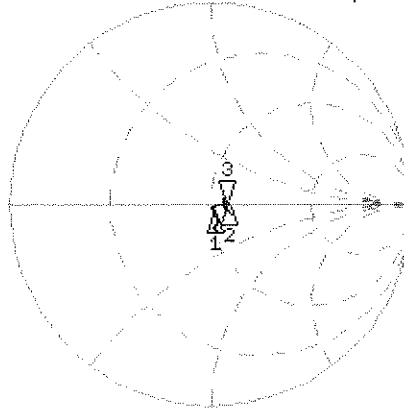

CH1 Markers


1: 51.600 Ω
 -4.3008 Ω
 5.25000 GHz
 2: 58.990 Ω
 -261.72 m Ω
 5.60000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 3: -22.744 dB 5 750.000 000 MHz

Cor

Avg
 16

H1d

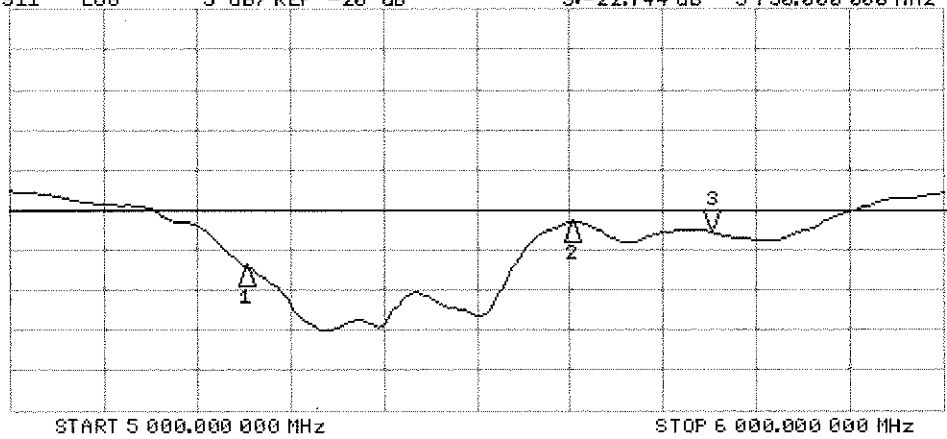

CH2 Markers

1: -26.909 dB
 5.25000 GHz
 2: -21.670 dB
 5.60000 GHz
 3: -22.744 dB
 5.75000 GHz

Certification of Calibration

Object D5GHzV2 – SN: 1123

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.



Extension Calibration date: 3/12/2019

Description: SAR Validation Dipole at 5250, 5600, and 5750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	10/2/2018	Annual	10/2/2019	US39170118
Agilent	N5182A	MXG Vector Signal Generator	6/15/2018	Annual	6/15/2019	MY47420837
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	MA2411B	Pulse Power Sensor	10/30/2018	Annual	10/30/2019	1207470
Anritsu	MA2411B	Pulse Power Sensor	11/20/2018	Annual	11/20/2019	1339007
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330158
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Seekonk	NC-100	Torque Wrench	7/11/2018	Annual	7/11/2019	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/10/2018	Annual	7/10/2019	1402
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/18/2018	Annual	10/18/2019	1364
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7491

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Team Lead Engineer	
Approved By:	Kaitlin O'Keefe	Managing Director	

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 17.0 dBm	Measured Head SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 17.0 dBm	Measured Head SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
5250	3/13/2018	3/12/2019	1.205	4.08	3.84	-5.88%	1.18	1.09	-7.63%	53.2	54.1	0.9	-5.2	-7.9	2.7	-24.6	-21.3	13.40%	PASS
5600	3/13/2018	3/12/2019	1.205	4.26	4	-6.10%	1.22	1.13	-7.38%	57.2	55.8	1.4	-0.4	3.7	4.1	-23.4	-23.8	-1.70%	PASS
5750	3/13/2018	3/12/2019	1.205	4.03	3.73	-7.44%	1.15	1.06	-7.83%	56.7	56	0.7	0.9	1.3	0.4	-23.9	-24.8	-3.80%	PASS
Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 17.0 dBm	Measured Body SAR (1g) W/kg @ 17.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 17.0 dBm	Measured Body SAR (10g) W/kg @ 17.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
5250	3/13/2018	3/12/2019	1.205	3.7	3.63	3.51%	1.03	1.07	3.88%	51.6	53.7	2.1	-4.3	-7.3	3	-26.9	-22.1	17.80%	PASS
5600	3/13/2018	3/12/2019	1.205	3.88	3.97	2.32%	1.09	1.09	0.00%	59	55.3	3.7	-0.3	1.2	1.5	-21.7	-25.5	-17.50%	PASS
5750	3/13/2018	3/12/2019	1.205	3.74	3.76	0.53%	1.04	1.03	-0.96%	57.8	59.1	1.3	1	3.3	2.3	-22.7	-21.1	7.00%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

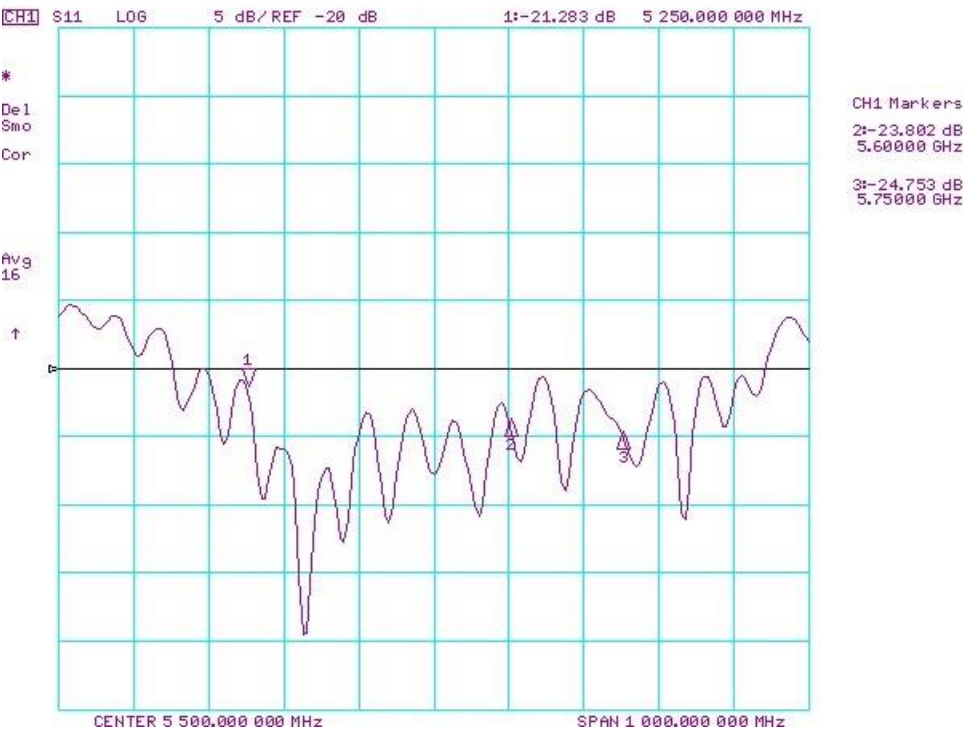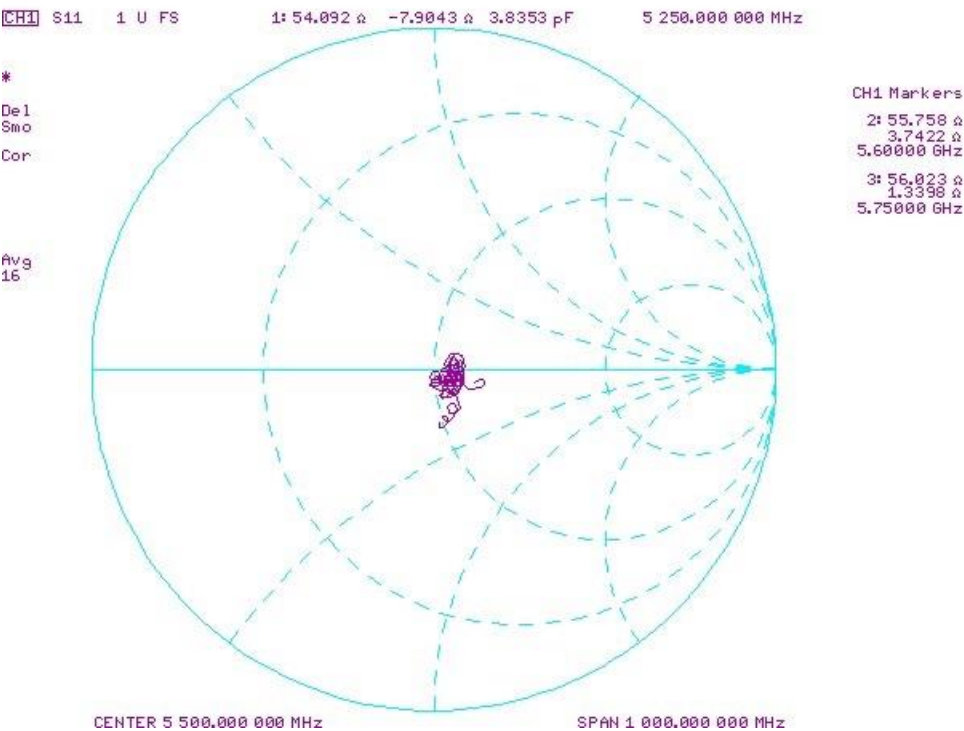

Impedance & Return-Loss Measurement Plot for Body TSL

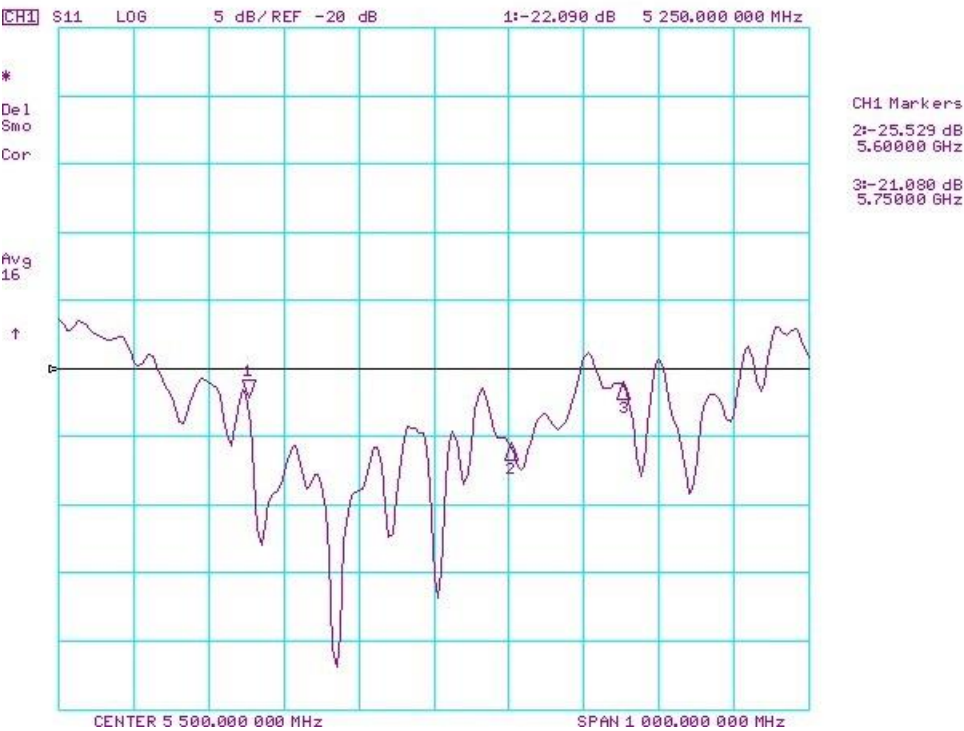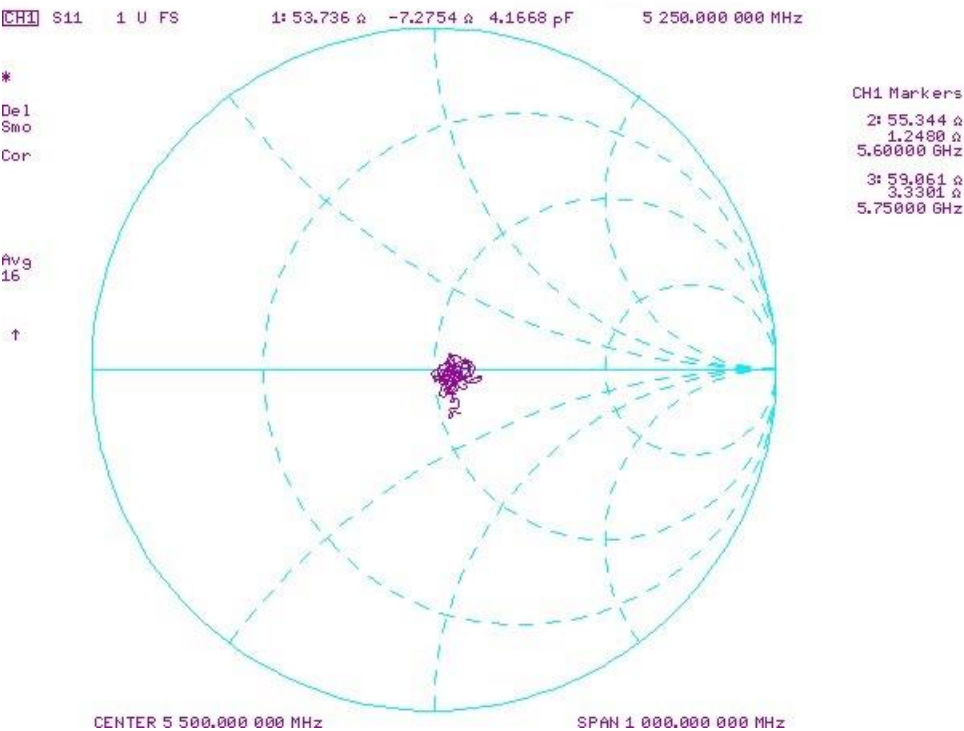



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-7532_Apr19**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7532**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v7**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 12, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-19 (No. 217-02894)	Apr-20
DAE4	SN: 660	19-Dec-18 (No. DAE4-660_Dec18)	Dec-19
Reference Probe ES3DV2	SN: 3013	31-Dec-18 (No. ES3-3013_Dec18)	Dec-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: April 18, 2019
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7532

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.46	0.41	0.48	$\pm 10.1 \%$
DCP (mV) ^B	95.9	99.2	101.2	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB/ μV	C	D dB	VR mV	Max dev.	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	130.6	$\pm 3.8 \%$	$\pm 4.7 \%$
		Y	0.00	0.00	1.00		143.6		
		Z	0.00	0.00	1.00		134.6		
10352-AAA	Pulse Waveform (200Hz, 10%)	X	8.28	78.46	15.24	10.00	60.0	$\pm 3.0 \%$	$\pm 9.6 \%$
		Y	2.33	65.30	10.44		60.0		
		Z	6.14	75.22	14.10		60.0		
10353-AAA	Pulse Waveform (200Hz, 20%)	X	15.00	85.55	16.34	6.99	80.0	$\pm 2.1 \%$	$\pm 9.6 \%$
		Y	1.95	66.76	9.83		80.0		
		Z	15.00	84.94	16.01		80.0		
10354-AAA	Pulse Waveform (200Hz, 40%)	X	15.00	89.33	16.76	3.98	95.0	$\pm 1.2 \%$	$\pm 9.6 \%$
		Y	0.55	61.56	6.38		95.0		
		Z	15.00	88.27	16.22		95.0		
10355-AAA	Pulse Waveform (200Hz, 60%)	X	15.00	96.18	18.66	2.22	120.0	$\pm 1.0 \%$	$\pm 9.6 \%$
		Y	0.26	60.00	4.30		120.0		
		Z	15.00	93.58	17.48		120.0		
10387-AAA	QPSK Waveform, 1 MHz	X	0.48	60.00	6.53	0.00	150.0	$\pm 3.1 \%$	$\pm 9.6 \%$
		Y	0.47	60.00	5.61		150.0		
		Z	0.47	60.00	6.40		150.0		
10388-AAA	QPSK Waveform, 10 MHz	X	2.25	69.41	16.61	0.00	150.0	$\pm 1.3 \%$	$\pm 9.6 \%$
		Y	1.84	65.93	14.51		150.0		
		Z	2.21	69.11	16.38		150.0		
10396-AAA	64-QAM Waveform, 100 kHz	X	2.77	71.23	19.25	3.01	150.0	$\pm 1.2 \%$	$\pm 9.6 \%$
		Y	2.12	65.82	16.55		150.0		
		Z	2.88	72.11	19.54		150.0		
10399-AAA	64-QAM Waveform, 40 MHz	X	3.52	67.74	16.20	0.00	150.0	$\pm 2.4 \%$	$\pm 9.6 \%$
		Y	3.24	66.16	15.20		150.0		
		Z	3.48	67.65	16.08		150.0		
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X	4.78	66.13	15.86	0.00	150.0	$\pm 4.3 \%$	$\pm 9.6 \%$
		Y	4.55	65.17	15.25		150.0		
		Z	4.59	65.54	15.49		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7532

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $ms.V^{-2}$	T2 $ms.V^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	33.7	250.12	35.29	7.37	0.00	5.04	1.41	0.10	1.00
Y	32.5	247.13	36.50	4.60	0.24	5.02	0.00	0.31	1.01
Z	32.7	238.86	34.29	6.99	0.00	5.03	1.69	0.03	1.01

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	25
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7532

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.84	10.84	10.84	0.35	1.20	± 12.0 %
835	41.5	0.90	10.45	10.45	10.45	0.35	1.20	± 12.0 %
1750	40.1	1.37	8.46	8.46	8.46	0.34	0.88	± 12.0 %
1900	40.0	1.40	8.17	8.17	8.17	0.36	0.90	± 12.0 %
2300	39.5	1.67	7.89	7.89	7.89	0.30	0.90	± 12.0 %
2450	39.2	1.80	7.55	7.55	7.55	0.28	1.20	± 12.0 %
2600	39.0	1.96	7.33	7.33	7.33	0.40	0.90	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7532

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth (mm) ^G	Unc (k=2)
750	55.5	0.96	10.60	10.60	10.60	0.39	0.95	± 12.0 %
835	55.2	0.97	10.14	10.14	10.14	0.46	0.80	± 12.0 %
1750	53.4	1.49	8.44	8.44	8.44	0.40	0.85	± 12.0 %
1900	53.3	1.52	8.03	8.03	8.03	0.40	0.86	± 12.0 %
2300	52.9	1.81	7.93	7.93	7.93	0.45	0.80	± 12.0 %
2450	52.7	1.95	7.66	7.66	7.66	0.35	0.95	± 12.0 %
2600	52.5	2.16	7.47	7.47	7.47	0.22	1.00	± 12.0 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

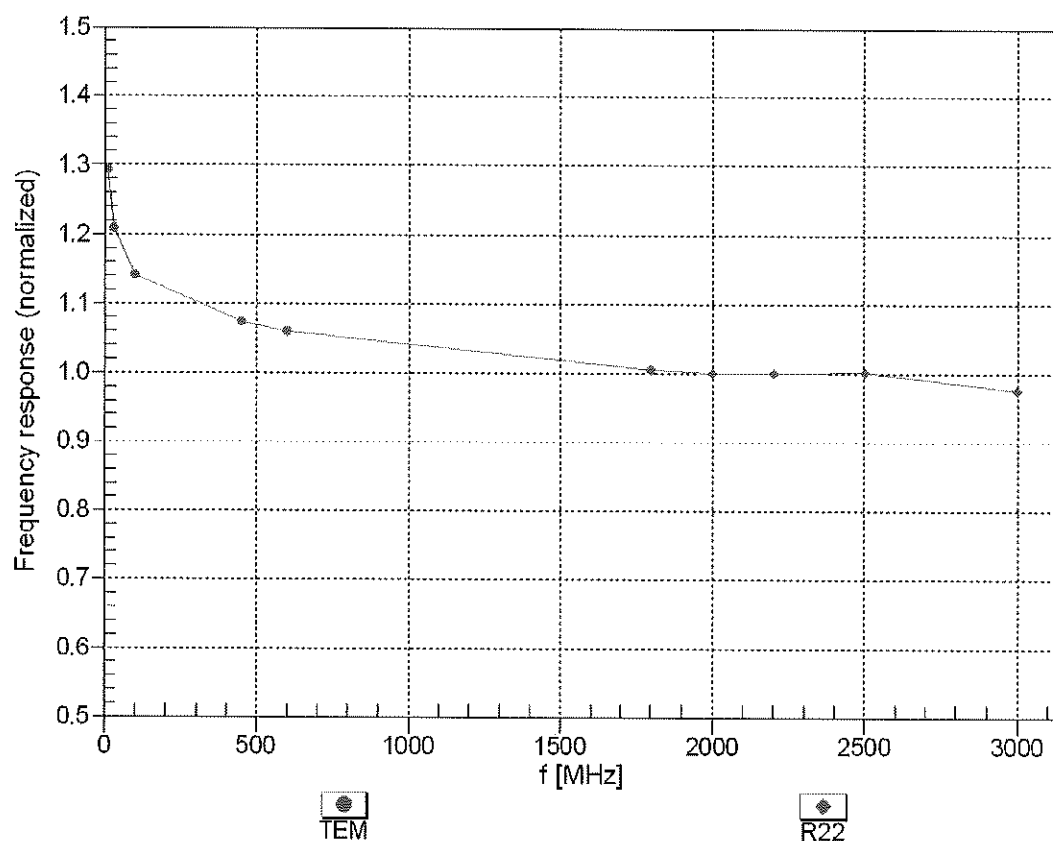



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

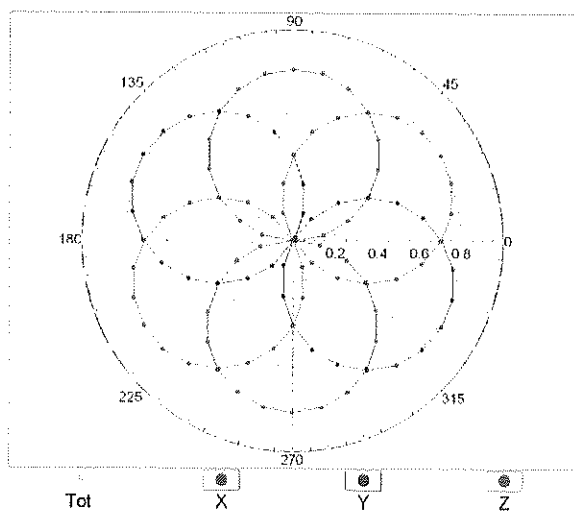


f=1800 MHz,R22

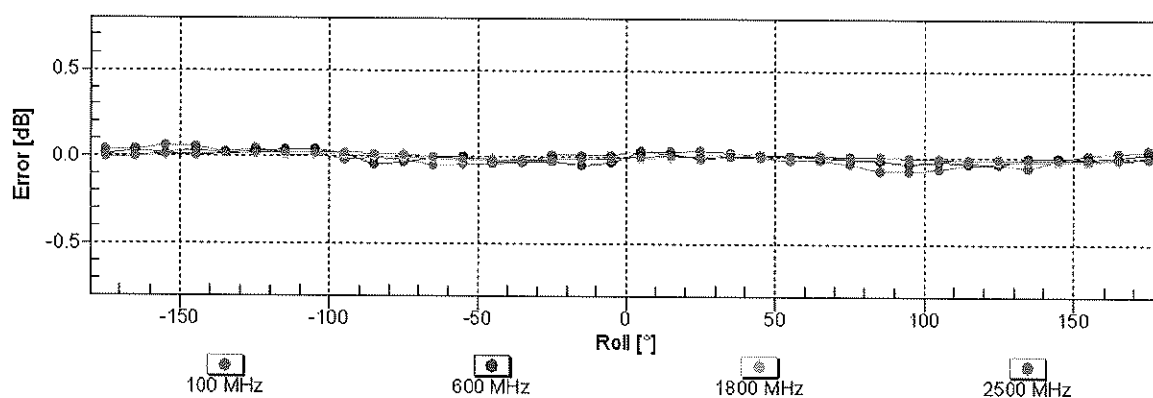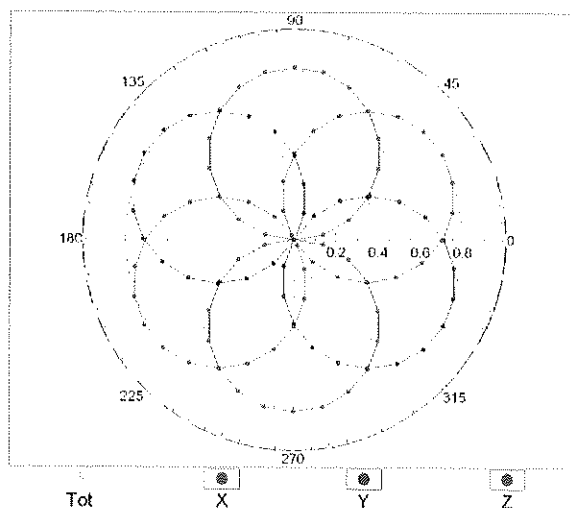


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

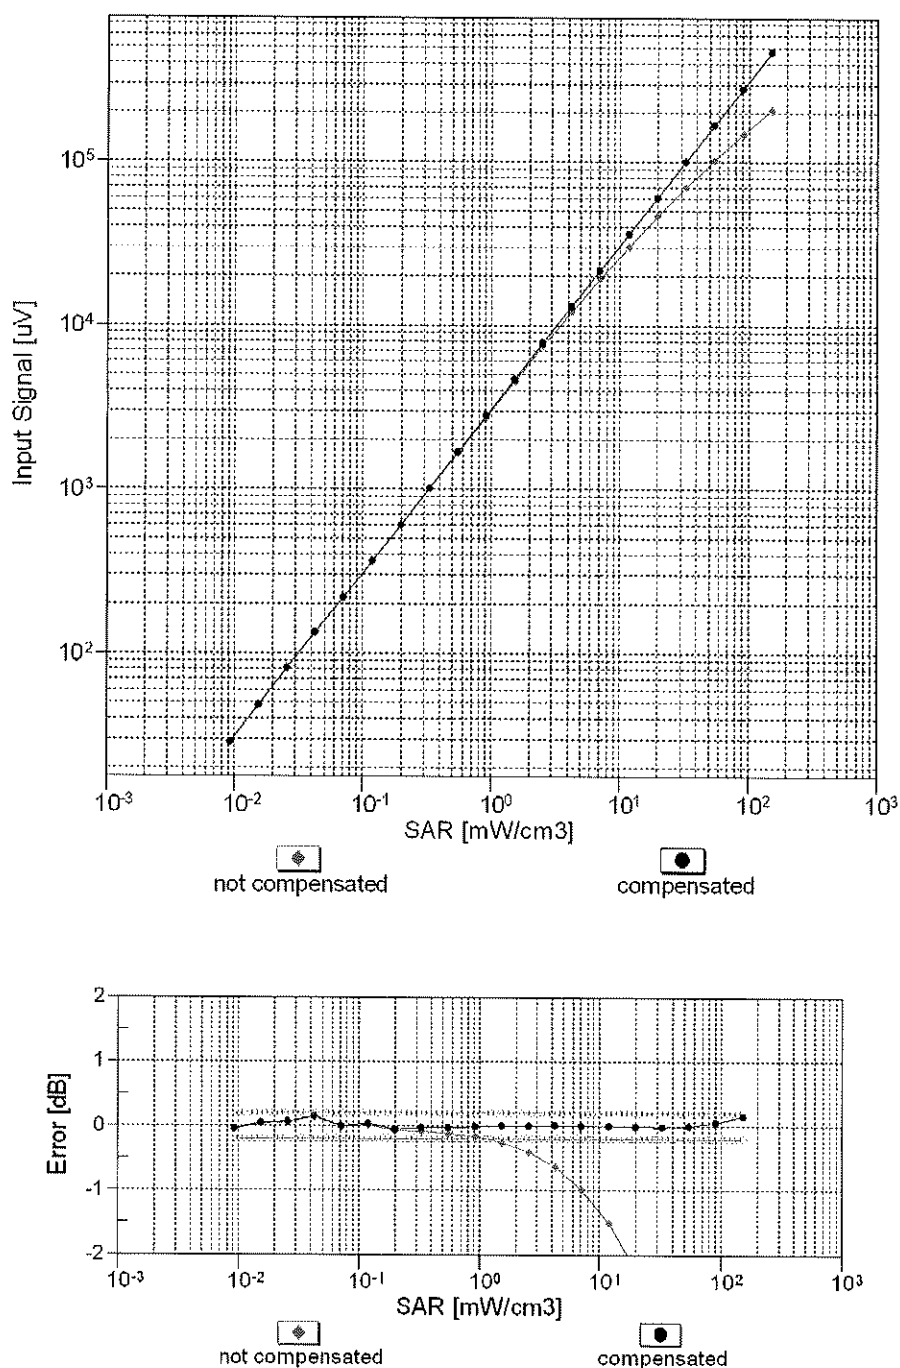



Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

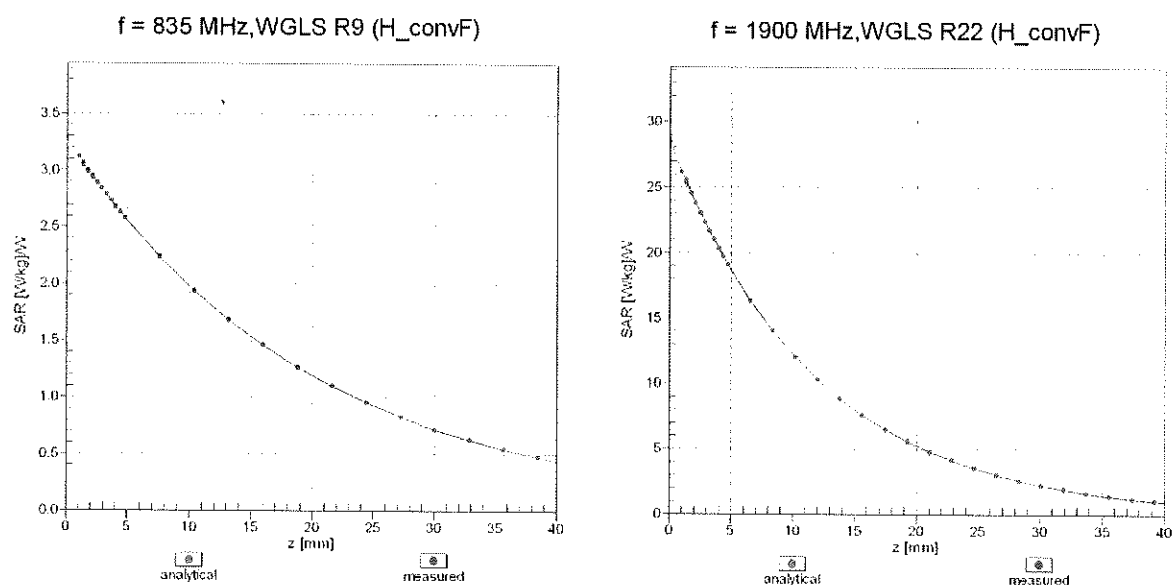

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

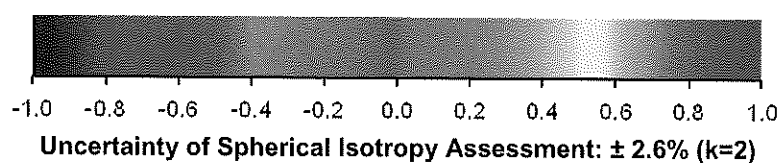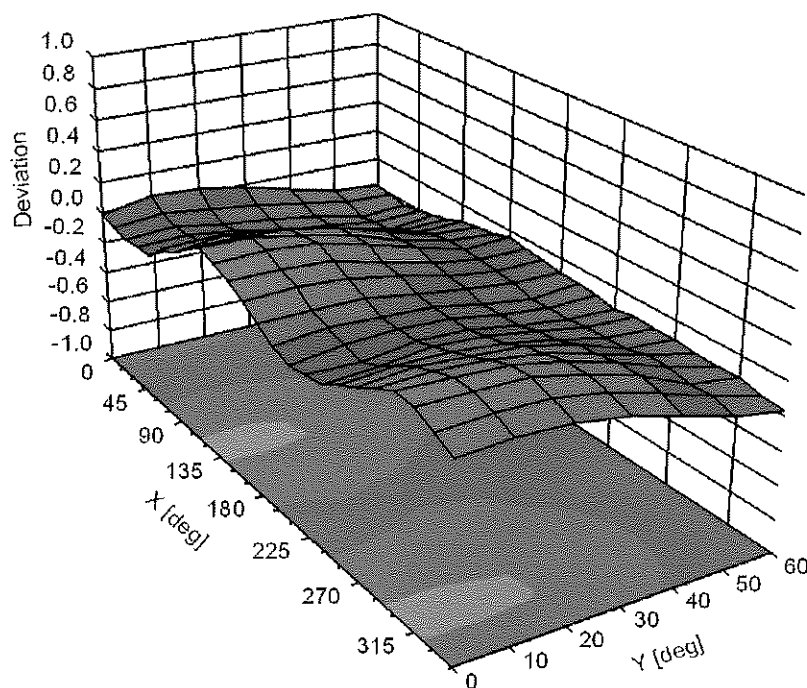

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E (k=2)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 %
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 %
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 %
10062	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 %
10063	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 %
10064	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 %
10065	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 %
10066	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 %
10067	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 %
10068	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 %
10069	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 %
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 %
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 %
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 %
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6 %
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6 %
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6 %
10097	CAB	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6 %
10098	CAB	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 %
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6 %
10100	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6 %
10101	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10102	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10103	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 9.6 %
10105	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6 %
10108	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6 %

10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10114	CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10115	CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6 %
10116	CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6 %
10117	CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6 %
10118	CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	± 9.6 %
10119	CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6 %
10140	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10141	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	± 9.6 %
10142	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10143	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6 %
10144	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6 %
10145	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	± 9.6 %
10146	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6 %
10147	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6 %
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10151	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10153	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6 %
10154	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10155	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10156	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6 %
10157	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10158	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6 %
10160	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6 %
10161	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10162	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6 %
10166	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6 %
10167	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 %
10168	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6 %
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10170	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10171	AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	± 9.6 %
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10173	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10174	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10175	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10176	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10177	CAI	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10178	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10179	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10181	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10182	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10183	AAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10184	CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10185	CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	± 9.6 %
10186	AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10187	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10188	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10189	AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10193	CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	± 9.6 %
10194	CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	± 9.6 %
10195	CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	± 9.6 %
10196	CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10197	CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10198	CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10219	CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	± 9.6 %

10220	CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	± 9.6 %
10223	CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	± 9.6 %
10224	CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	± 9.6 %
10225	CAB	UMTS-FDD (HSPA+)	WCDMA	5.97	± 9.6 %
10226	CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	± 9.6 %
10227	CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	± 9.6 %
10228	CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 9.6 %
10229	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	± 9.6 %
10232	CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10233	CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10234	CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10235	CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10236	CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10237	CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10238	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10239	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10240	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10241	CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	± 9.6 %
10242	CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	± 9.6 %
10243	CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	± 9.6 %
10244	CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10245	CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	± 9.6 %
10246	CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10247	CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	± 9.6 %
10248	CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	± 9.6 %
10249	CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10250	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	± 9.6 %
10251	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	± 9.6 %
10252	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	± 9.6 %
10254	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	± 9.6 %
10255	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	± 9.6 %
10256	CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	± 9.6 %
10257	CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	± 9.6 %
10258	CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	± 9.6 %
10259	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	± 9.6 %
10260	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	± 9.6 %
10261	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10262	CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	± 9.6 %
10263	CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	± 9.6 %
10264	CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	± 9.6 %
10265	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10266	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	± 9.6 %
10267	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10269	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 9.6 %
10270	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	± 9.6 %
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	± 9.6 %
10275	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	± 9.6 %
10277	CAA	PHS (QPSK)	PHS	11.81	± 9.6 %
10278	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6 %
10279	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	± 9.6 %
10290	AAB	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10291	AAB	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	± 9.6 %
10293	AAB	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6 %
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6 %
10297	AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6 %
10298	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10299	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	± 9.6 %

10300	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10301	AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WiMAX	12.03	± 9.6 %
10302	AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	WiMAX	12.57	± 9.6 %
10303	AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	12.52	± 9.6 %
10304	AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	11.86	± 9.6 %
10305	AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	WiMAX	15.24	± 9.6 %
10306	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	WiMAX	14.67	± 9.6 %
10307	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	WiMAX	14.49	± 9.6 %
10308	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WiMAX	14.46	± 9.6 %
10309	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	WiMAX	14.58	± 9.6 %
10310	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	WiMAX	14.57	± 9.6 %
10311	AAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	± 9.6 %
10313	AAA	iDEN 1:3	iDEN	10.51	± 9.6 %
10314	AAA	iDEN 1:6	iDEN	13.48	± 9.6 %
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	± 9.6 %
10316	AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	± 9.6 %
10317	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	± 9.6 %
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	± 9.6 %
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	± 9.6 %
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.6 %
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	± 9.6 %
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	± 9.6 %
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	± 9.6 %
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	± 9.6 %
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	± 9.6 %
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 9.6 %
10400	AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	WLAN	8.37	± 9.6 %
10401	AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	± 9.6 %
10402	AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	± 9.6 %
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 9.6 %
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.6 %
10406	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	± 9.6 %
10410	AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	LTE-TDD	7.82	± 9.6 %
10414	AAA	WLAN CCDF, 64-QAM, 40MHz	Generic	8.54	± 9.6 %
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	± 9.6 %
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	± 9.6 %
10417	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	± 9.6 %
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	WLAN	8.14	± 9.6 %
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	WLAN	8.19	± 9.6 %
10422	AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	± 9.6 %
10423	AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	± 9.6 %
10424	AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	± 9.6 %
10425	AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	± 9.6 %
10426	AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	± 9.6 %
10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	± 9.6 %
10430	AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	± 9.6 %
10431	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	± 9.6 %
10432	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10434	AAA	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	± 9.6 %
10435	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10447	AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	± 9.6 %
10448	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	± 9.6 %
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	± 9.6 %
10450	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 9.6 %

10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	± 9.6 %
10456	AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	± 9.6 %
10457	AAA	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	± 9.6 %
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	± 9.6 %
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 9.6 %
10460	AAA	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	± 9.6 %
10461	AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10462	AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	± 9.6 %
10463	AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	± 9.6 %
10464	AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10465	AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10466	AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	± 9.6 %
10467	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10468	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10469	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	± 9.6 %
10470	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10471	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10472	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	± 9.6 %
10473	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10474	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10475	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	± 9.6 %
10477	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10478	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	± 9.6 %
10479	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %
10480	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	± 9.6 %
10481	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	± 9.6 %
10482	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	± 9.6 %
10483	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	± 9.6 %
10484	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	± 9.6 %
10485	AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.59	± 9.6 %
10486	AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	± 9.6 %
10487	AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	± 9.6 %
10488	AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.70	± 9.6 %
10489	AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	± 9.6 %
10490	AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	± 9.6 %
10491	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %

10492	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	± 9.6 %
10493	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	± 9.6 %
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	± 9.6 %
10496	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	± 9.6 %
10497	AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	± 9.6 %
10498	AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	± 9.6 %
10499	AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.68	± 9.6 %
10500	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	± 9.6 %
10501	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	± 9.6 %
10502	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	± 9.6 %
10503	AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	± 9.6 %
10504	AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	± 9.6 %
10505	AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	± 9.6 %
10506	AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %
10507	AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	± 9.6 %
10508	AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	± 9.6 %
10509	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.99	± 9.6 %
10510	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	± 9.6 %
10511	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	± 9.6 %
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	± 9.6 %
10514	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	± 9.6 %
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	± 9.6 %
10516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	± 9.6 %
10517	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	± 9.6 %
10518	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.23	± 9.6 %
10519	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	± 9.6 %
10520	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.12	± 9.6 %
10521	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	± 9.6 %
10522	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10523	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.08	± 9.6 %
10524	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	± 9.6 %
10525	AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	WLAN	8.36	± 9.6 %
10526	AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10527	AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	WLAN	8.21	± 9.6 %
10528	AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	WLAN	8.36	± 9.6 %
10529	AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	WLAN	8.36	± 9.6 %
10531	AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	WLAN	8.43	± 9.6 %
10532	AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10533	AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	WLAN	8.38	± 9.6 %
10534	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	WLAN	8.45	± 9.6 %

10535	AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10536	AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	WLAN	8.32	± 9.6 %
10537	AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	WLAN	8.44	± 9.6 %
10538	AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	WLAN	8.54	± 9.6 %
10540	AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	WLAN	8.39	± 9.6 %
10541	AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	WLAN	8.46	± 9.6 %
10542	AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	WLAN	8.65	± 9.6 %
10543	AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	WLAN	8.65	± 9.6 %
10544	AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	WLAN	8.47	± 9.6 %
10545	AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	WLAN	8.55	± 9.6 %
10546	AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	WLAN	8.35	± 9.6 %
10547	AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	WLAN	8.49	± 9.6 %
10548	AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	WLAN	8.37	± 9.6 %
10550	AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	WLAN	8.38	± 9.6 %
10551	AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	WLAN	8.50	± 9.6 %
10552	AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10553	AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10554	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	WLAN	8.48	± 9.6 %
10555	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	WLAN	8.47	± 9.6 %
10556	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	WLAN	8.50	± 9.6 %
10557	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	WLAN	8.52	± 9.6 %
10558	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	WLAN	8.61	± 9.6 %
10560	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	WLAN	8.73	± 9.6 %
10561	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	WLAN	8.56	± 9.6 %
10562	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	WLAN	8.69	± 9.6 %
10563	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	WLAN	8.77	± 9.6 %
10564	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	± 9.6 %
10565	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10566	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	± 9.6 %
10567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	± 9.6 %
10568	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	± 9.6 %
10569	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.10	± 9.6 %
10570	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.30	± 9.6 %
10571	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	± 9.6 %
10572	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.99	± 9.6 %
10573	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	± 9.6 %
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	± 9.6 %
10575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	± 9.6 %
10576	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	± 9.6 %
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10578	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	± 9.6 %
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	± 9.6 %
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	± 9.6 %
10581	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	± 9.6 %
10582	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	± 9.6 %
10583	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	± 9.6 %
10584	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	± 9.6 %
10585	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10586	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	± 9.6 %
10587	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	± 9.6 %

10588	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	± 9.6 %
10589	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	± 9.6 %
10590	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	± 9.6 %
10591	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	WLAN	8.63	± 9.6 %
10592	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	WLAN	8.79	± 9.6 %
10593	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	WLAN	8.64	± 9.6 %
10594	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10595	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10596	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	WLAN	8.71	± 9.6 %
10597	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	WLAN	8.72	± 9.6 %
10598	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	WLAN	8.50	± 9.6 %
10599	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	WLAN	8.79	± 9.6 %
10600	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	WLAN	8.88	± 9.6 %
10601	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10602	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	WLAN	8.94	± 9.6 %
10603	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	WLAN	9.03	± 9.6 %
10604	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	WLAN	8.76	± 9.6 %
10605	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	WLAN	8.97	± 9.6 %
10606	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10607	AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	WLAN	8.64	± 9.6 %
10608	AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	WLAN	8.77	± 9.6 %
10609	AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	WLAN	8.57	± 9.6 %
10610	AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	WLAN	8.78	± 9.6 %
10611	AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10612	AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	WLAN	8.77	± 9.6 %
10613	AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	WLAN	8.94	± 9.6 %
10614	AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	WLAN	8.59	± 9.6 %
10615	AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10616	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10617	AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10618	AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	WLAN	8.58	± 9.6 %
10619	AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	WLAN	8.86	± 9.6 %
10620	AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	WLAN	8.87	± 9.6 %
10621	AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	WLAN	8.77	± 9.6 %
10622	AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	WLAN	8.68	± 9.6 %
10623	AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10624	AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	WLAN	8.96	± 9.6 %
10625	AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	WLAN	8.96	± 9.6 %
10626	AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	WLAN	8.83	± 9.6 %
10627	AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	WLAN	8.88	± 9.6 %
10628	AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	WLAN	8.71	± 9.6 %
10629	AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	WLAN	8.85	± 9.6 %
10630	AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	WLAN	8.72	± 9.6 %
10631	AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10632	AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10633	AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	WLAN	8.83	± 9.6 %
10634	AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	WLAN	8.80	± 9.6 %
10635	AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10636	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	WLAN	8.83	± 9.6 %
10637	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	WLAN	8.79	± 9.6 %
10638	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	WLAN	8.86	± 9.6 %
10639	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	WLAN	8.85	± 9.6 %
10640	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	WLAN	8.98	± 9.6 %
10641	AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	WLAN	9.06	± 9.6 %
10642	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	WLAN	9.06	± 9.6 %
10643	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	WLAN	8.89	± 9.6 %
10644	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	WLAN	9.05	± 9.6 %
10645	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	WLAN	9.11	± 9.6 %
10646	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	± 9.6 %
10647	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	± 9.6 %
10648	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	± 9.6 %
10652	AAD	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	± 9.6 %
10653	AAD	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	± 9.6 %
10654	AAD	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	± 9.6 %

10655	AAE	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	± 9.6 %
10658	AAA	Pulse Waveform (200Hz, 10%)	Test	10.00	± 9.6 %
10659	AAA	Pulse Waveform (200Hz, 20%)	Test	6.99	± 9.6 %
10660	AAA	Pulse Waveform (200Hz, 40%)	Test	3.98	± 9.6 %
10661	AAA	Pulse Waveform (200Hz, 60%)	Test	2.22	± 9.6 %
10662	AAA	Pulse Waveform (200Hz, 80%)	Test	0.97	± 9.6 %
10670	AAA	Bluetooth Low Energy	Bluetooth	2.19	± 9.6 %
10671	AAA	IEEE 802.11ax (20MHz, MCS0, 90pc duty cycle)	WLAN	9.09	± 9.6 %
10672	AAA	IEEE 802.11ax (20MHz, MCS1, 90pc duty cycle)	WLAN	8.57	± 9.6 %
10673	AAA	IEEE 802.11ax (20MHz, MCS2, 90pc duty cycle)	WLAN	8.78	± 9.6 %
10674	AAA	IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10675	AAA	IEEE 802.11ax (20MHz, MCS4, 90pc duty cycle)	WLAN	8.90	± 9.6 %
10676	AAA	IEEE 802.11ax (20MHz, MCS5, 90pc duty cycle)	WLAN	8.77	± 9.6 %
10677	AAA	IEEE 802.11ax (20MHz, MCS6, 90pc duty cycle)	WLAN	8.73	± 9.6 %
10678	AAA	IEEE 802.11ax (20MHz, MCS7, 90pc duty cycle)	WLAN	8.78	± 9.6 %
10679	AAA	IEEE 802.11ax (20MHz, MCS8, 90pc duty cycle)	WLAN	8.89	± 9.6 %
10680	AAA	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.80	± 9.6 %
10681	AAA	IEEE 802.11ax (20MHz, MCS10, 90pc duty cycle)	WLAN	8.62	± 9.6 %
10682	AAA	IEEE 802.11ax (20MHz, MCS11, 90pc duty cycle)	WLAN	8.83	± 9.6 %
10683	AAA	IEEE 802.11ax (20MHz, MCS0, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10684	AAA	IEEE 802.11ax (20MHz, MCS1, 99pc duty cycle)	WLAN	8.26	± 9.6 %
10685	AAA	IEEE 802.11ax (20MHz, MCS2, 99pc duty cycle)	WLAN	8.33	± 9.6 %
10686	AAA	IEEE 802.11ax (20MHz, MCS3, 99pc duty cycle)	WLAN	8.28	± 9.6 %
10687	AAA	IEEE 802.11ax (20MHz, MCS4, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10688	AAA	IEEE 802.11ax (20MHz, MCS5, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10689	AAA	IEEE 802.11ax (20MHz, MCS6, 99pc duty cycle)	WLAN	8.55	± 9.6 %
10690	AAA	IEEE 802.11ax (20MHz, MCS7, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10691	AAA	IEEE 802.11ax (20MHz, MCS8, 99pc duty cycle)	WLAN	8.25	± 9.6 %
10692	AAA	IEEE 802.11ax (20MHz, MCS9, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10693	AAA	IEEE 802.11ax (20MHz, MCS10, 99pc duty cycle)	WLAN	8.25	± 9.6 %
10694	AAA	IEEE 802.11ax (20MHz, MCS11, 99pc duty cycle)	WLAN	8.57	± 9.6 %
10695	AAA	IEEE 802.11ax (40MHz, MCS0, 90pc duty cycle)	WLAN	8.78	± 9.6 %
10696	AAA	IEEE 802.11ax (40MHz, MCS1, 90pc duty cycle)	WLAN	8.91	± 9.6 %
10697	AAA	IEEE 802.11ax (40MHz, MCS2, 90pc duty cycle)	WLAN	8.61	± 9.6 %
10698	AAA	IEEE 802.11ax (40MHz, MCS3, 90pc duty cycle)	WLAN	8.89	± 9.6 %
10699	AAA	IEEE 802.11ax (40MHz, MCS4, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10700	AAA	IEEE 802.11ax (40MHz, MCS5, 90pc duty cycle)	WLAN	8.73	± 9.6 %
10701	AAA	IEEE 802.11ax (40MHz, MCS6, 90pc duty cycle)	WLAN	8.86	± 9.6 %
10702	AAA	IEEE 802.11ax (40MHz, MCS7, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10703	AAA	IEEE 802.11ax (40MHz, MCS8, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10704	AAA	IEEE 802.11ax (40MHz, MCS9, 90pc duty cycle)	WLAN	8.56	± 9.6 %
10705	AAA	IEEE 802.11ax (40MHz, MCS10, 90pc duty cycle)	WLAN	8.69	± 9.6 %
10706	AAA	IEEE 802.11ax (40MHz, MCS11, 90pc duty cycle)	WLAN	8.66	± 9.6 %
10707	AAA	IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle)	WLAN	8.32	± 9.6 %
10708	AAA	IEEE 802.11ax (40MHz, MCS1, 99pc duty cycle)	WLAN	8.55	± 9.6 %
10709	AAA	IEEE 802.11ax (40MHz, MCS2, 99pc duty cycle)	WLAN	8.33	± 9.6 %
10710	AAA	IEEE 802.11ax (40MHz, MCS3, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10711	AAA	IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle)	WLAN	8.39	± 9.6 %
10712	AAA	IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle)	WLAN	8.67	± 9.6 %
10713	AAA	IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle)	WLAN	8.33	± 9.6 %
10714	AAA	IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle)	WLAN	8.26	± 9.6 %
10715	AAA	IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10716	AAA	IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle)	WLAN	8.30	± 9.6 %
10717	AAA	IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle)	WLAN	8.48	± 9.6 %
10718	AAA	IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle)	WLAN	8.24	± 9.6 %
10719	AAA	IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10720	AAA	IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle)	WLAN	8.87	± 9.6 %
10721	AAA	IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle)	WLAN	8.76	± 9.6 %
10722	AAA	IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle)	WLAN	8.55	± 9.6 %
10723	AAA	IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10724	AAA	IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle)	WLAN	8.90	± 9.6 %
10725	AAA	IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10726	AAA	IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle)	WLAN	8.72	± 9.6 %
10727	AAA	IEEE 802.11ax (80MHz, MCS8, 90pc duty cycle)	WLAN	8.66	± 9.6 %

10728	AAA	IEEE 802.11ax (80MHz, MCS9, 90pc duty cycle)	WLAN	8.65	± 9.6 %
10729	AAA	IEEE 802.11ax (80MHz, MCS10, 90pc duty cycle)	WLAN	8.64	± 9.6 %
10730	AAA	IEEE 802.11ax (80MHz, MCS11, 90pc duty cycle)	WLAN	8.67	± 9.6 %
10731	AAA	IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10732	AAA	IEEE 802.11ax (80MHz, MCS1, 99pc duty cycle)	WLAN	8.46	± 9.6 %
10733	AAA	IEEE 802.11ax (80MHz, MCS2, 99pc duty cycle)	WLAN	8.40	± 9.6 %
10734	AAA	IEEE 802.11ax (80MHz, MCS3, 99pc duty cycle)	WLAN	8.25	± 9.6 %
10735	AAA	IEEE 802.11ax (80MHz, MCS4, 99pc duty cycle)	WLAN	8.33	± 9.6 %
10736	AAA	IEEE 802.11ax (80MHz, MCS5, 99pc duty cycle)	WLAN	8.27	± 9.6 %
10737	AAA	IEEE 802.11ax (80MHz, MCS6, 99pc duty cycle)	WLAN	8.36	± 9.6 %
10738	AAA	IEEE 802.11ax (80MHz, MCS7, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10739	AAA	IEEE 802.11ax (80MHz, MCS8, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10740	AAA	IEEE 802.11ax (80MHz, MCS9, 99pc duty cycle)	WLAN	8.48	± 9.6 %
10741	AAA	IEEE 802.11ax (80MHz, MCS10, 99pc duty cycle)	WLAN	8.40	± 9.6 %
10742	AAA	IEEE 802.11ax (80MHz, MCS11, 99pc duty cycle)	WLAN	8.43	± 9.6 %
10743	AAA	IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle)	WLAN	8.94	± 9.6 %
10744	AAA	IEEE 802.11ax (160MHz, MCS1, 90pc duty cycle)	WLAN	9.16	± 9.6 %
10745	AAA	IEEE 802.11ax (160MHz, MCS2, 90pc duty cycle)	WLAN	8.93	± 9.6 %
10746	AAA	IEEE 802.11ax (160MHz, MCS3, 90pc duty cycle)	WLAN	9.11	± 9.6 %
10747	AAA	IEEE 802.11ax (160MHz, MCS4, 90pc duty cycle)	WLAN	9.04	± 9.6 %
10748	AAA	IEEE 802.11ax (160MHz, MCS5, 90pc duty cycle)	WLAN	8.93	± 9.6 %
10749	AAA	IEEE 802.11ax (160MHz, MCS6, 90pc duty cycle)	WLAN	8.90	± 9.6 %
10750	AAA	IEEE 802.11ax (160MHz, MCS7, 90pc duty cycle)	WLAN	8.79	± 9.6 %
10751	AAA	IEEE 802.11ax (160MHz, MCS8, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10752	AAA	IEEE 802.11ax (160MHz, MCS9, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10753	AAA	IEEE 802.11ax (160MHz, MCS10, 90pc duty cycle)	WLAN	9.00	± 9.6 %
10754	AAA	IEEE 802.11ax (160MHz, MCS11, 90pc duty cycle)	WLAN	8.94	± 9.6 %
10755	AAA	IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle)	WLAN	8.64	± 9.6 %
10756	AAA	IEEE 802.11ax (160MHz, MCS1, 99pc duty cycle)	WLAN	8.77	± 9.6 %
10757	AAA	IEEE 802.11ax (160MHz, MCS2, 99pc duty cycle)	WLAN	8.77	± 9.6 %
10758	AAA	IEEE 802.11ax (160MHz, MCS3, 99pc duty cycle)	WLAN	8.69	± 9.6 %
10759	AAA	IEEE 802.11ax (160MHz, MCS4, 99pc duty cycle)	WLAN	8.58	± 9.6 %
10760	AAA	IEEE 802.11ax (160MHz, MCS5, 99pc duty cycle)	WLAN	8.49	± 9.6 %
10761	AAA	IEEE 802.11ax (160MHz, MCS6, 99pc duty cycle)	WLAN	8.58	± 9.6 %
10762	AAA	IEEE 802.11ax (160MHz, MCS7, 99pc duty cycle)	WLAN	8.49	± 9.6 %
10763	AAA	IEEE 802.11ax (160MHz, MCS8, 99pc duty cycle)	WLAN	8.53	± 9.6 %
10764	AAA	IEEE 802.11ax (160MHz, MCS9, 99pc duty cycle)	WLAN	8.54	± 9.6 %
10765	AAA	IEEE 802.11ax (160MHz, MCS10, 99pc duty cycle)	WLAN	8.54	± 9.6 %
10766	AAA	IEEE 802.11ax (160MHz, MCS11, 99pc duty cycle)	WLAN	8.51	± 9.6 %

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **EX3-7491_Jul19**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7491**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7**
Calibration procedure for dosimetric E-field probes

Calibration date: **July 16, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-19 (No. 217-02894)	Apr-20
DAE4	SN: 660	19-Dec-18 (No. DAE4-660_Dec18)	Dec-19
Reference Probe ES3DV2	SN: 3013	31-Dec-18 (No. ES3-3013_Dec18)	Dec-19
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: July 16, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7491

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.56	0.56	0.49	$\pm 10.1 \%$
DCP (mV) ^B	99.3	95.8	97.4	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB/ μV	C	D dB	VR mV	Max dev.	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	129.7	$\pm 1.9 \%$	$\pm 4.7 \%$
		Y	0.00	0.00	1.00		146.9		
		Z	0.00	0.00	1.00		137.0		
10352-AAA	Pulse Waveform (200Hz, 10%)	X	3.11	68.26	11.13	10.00	60.0	$\pm 3.0 \%$	$\pm 9.6 \%$
		Y	15.00	84.48	17.25		60.0		
		Z	3.13	68.32	11.30		60.0		
10353-AAA	Pulse Waveform (200Hz, 20%)	X	14.99	82.72	14.60	6.99	80.0	$\pm 2.3 \%$	$\pm 9.6 \%$
		Y	15.00	86.08	16.58		80.0		
		Z	3.06	71.00	11.36		80.0		
10354-AAA	Pulse Waveform (200Hz, 40%)	X	15.00	84.61	14.14	3.98	95.0	$\pm 1.4 \%$	$\pm 9.6 \%$
		Y	15.00	86.93	15.33		95.0		
		Z	15.00	85.16	14.43		95.0		
10355-AAA	Pulse Waveform (200Hz, 60%)	X	15.00	89.50	15.25	2.22	120.0	$\pm 1.2 \%$	$\pm 9.6 \%$
		Y	15.00	80.53	11.09		120.0		
		Z	15.00	88.28	14.83		120.0		
10387-AAA	QPSK Waveform, 1 MHz	X	0.46	60.00	6.46	0.00	150.0	$\pm 2.8 \%$	$\pm 9.6 \%$
		Y	0.53	60.00	6.88		150.0		
		Z	0.46	60.00	5.87		150.0		
10388-AAA	QPSK Waveform, 10 MHz	X	2.59	72.23	18.27	0.00	150.0	$\pm 1.1 \%$	$\pm 9.6 \%$
		Y	2.05	67.21	15.26		150.0		
		Z	2.13	68.38	16.01		150.0		
10396-AAA	64-QAM Waveform, 100 kHz	X	2.96	73.01	20.63	3.01	150.0	$\pm 0.8 \%$	$\pm 9.6 \%$
		Y	2.73	69.43	18.37		150.0		
		Z	2.47	69.05	18.23		150.0		
10399-AAA	64-QAM Waveform, 40 MHz	X	3.65	68.57	16.85	0.00	150.0	$\pm 2.1 \%$	$\pm 9.6 \%$
		Y	3.41	66.77	15.60		150.0		
		Z	3.33	66.75	15.65		150.0		
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X	4.84	66.48	16.23	0.00	150.0	$\pm 4.1 \%$	$\pm 9.6 \%$
		Y	4.76	65.53	15.53		150.0		
		Z	4.57	65.47	15.47		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7491

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $ms.V^{-2}$	T2 $ms.V^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	32.7	245.31	36.06	6.45	0.00	5.02	1.15	0.14	1.01
Y	39.4	302.90	37.36	5.30	0.05	5.07	0.70	0.34	1.01
Z	29.7	220.58	35.22	5.02	0.00	5.00	0.97	0.12	1.00

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	107.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7491

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.33	10.33	10.33	0.37	0.95	± 12.0 %
835	41.5	0.90	9.99	9.99	9.99	0.47	0.80	± 12.0 %
1750	40.1	1.37	8.73	8.73	8.73	0.27	0.87	± 12.0 %
1900	40.0	1.40	8.34	8.34	8.34	0.33	0.87	± 12.0 %
2300	39.5	1.67	7.93	7.93	7.93	0.23	0.90	± 12.0 %
2450	39.2	1.80	7.50	7.50	7.50	0.32	0.90	± 12.0 %
2600	39.0	1.96	7.34	7.34	7.34	0.31	0.90	± 12.0 %
5250	35.9	4.71	5.51	5.51	5.51	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.94	4.94	4.94	0.40	1.80	± 13.1 %
5750	35.4	5.22	5.20	5.20	5.20	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7491

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.39	10.39	10.39	0.37	0.96	± 12.0 %
835	55.2	0.97	10.27	10.27	10.27	0.47	0.81	± 12.0 %
1750	53.4	1.49	8.42	8.42	8.42	0.30	0.87	± 12.0 %
1900	53.3	1.52	8.04	8.04	8.04	0.31	0.87	± 12.0 %
2300	52.9	1.81	7.74	7.74	7.74	0.35	0.90	± 12.0 %
2450	52.7	1.95	7.57	7.57	7.57	0.31	0.90	± 12.0 %
2600	52.5	2.16	7.45	7.45	7.45	0.22	0.90	± 12.0 %
5250	48.9	5.36	4.87	4.87	4.87	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.23	4.23	4.23	0.50	1.90	± 13.1 %
5750	48.3	5.94	4.32	4.32	4.32	0.50	1.90	± 13.1 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

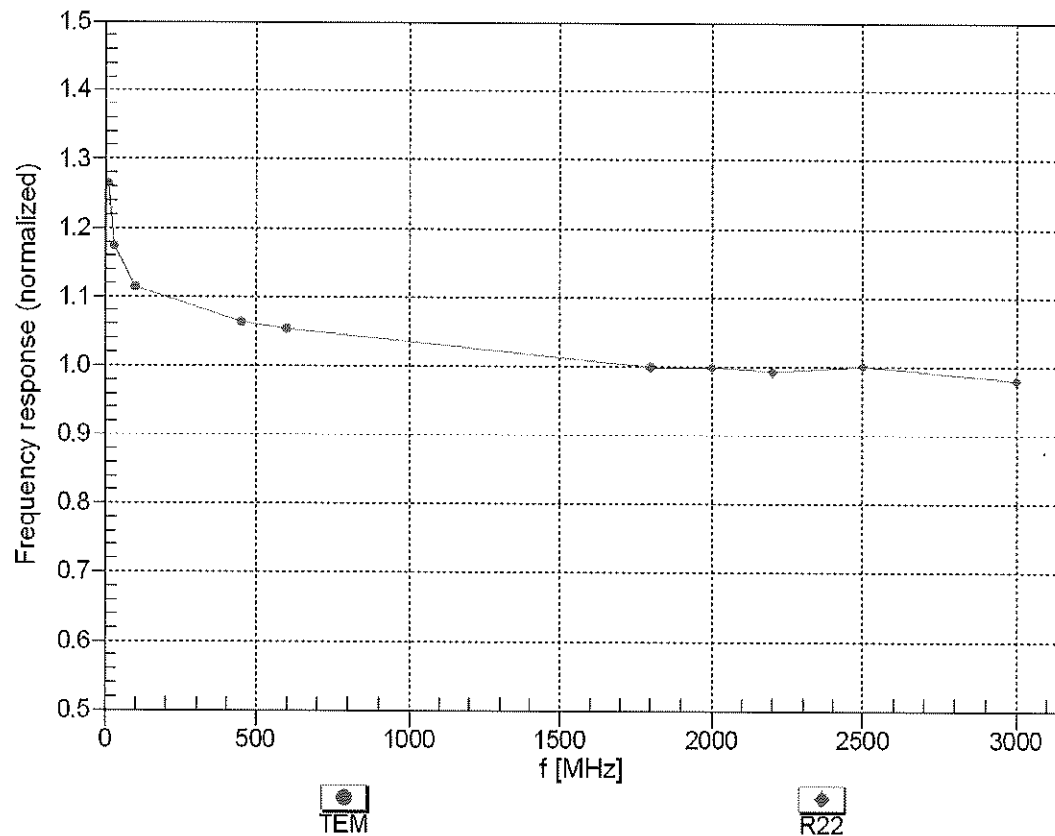



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

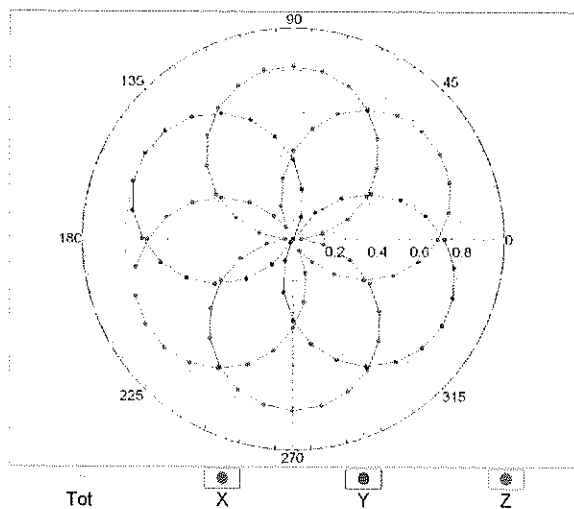


f=1800 MHz,R22

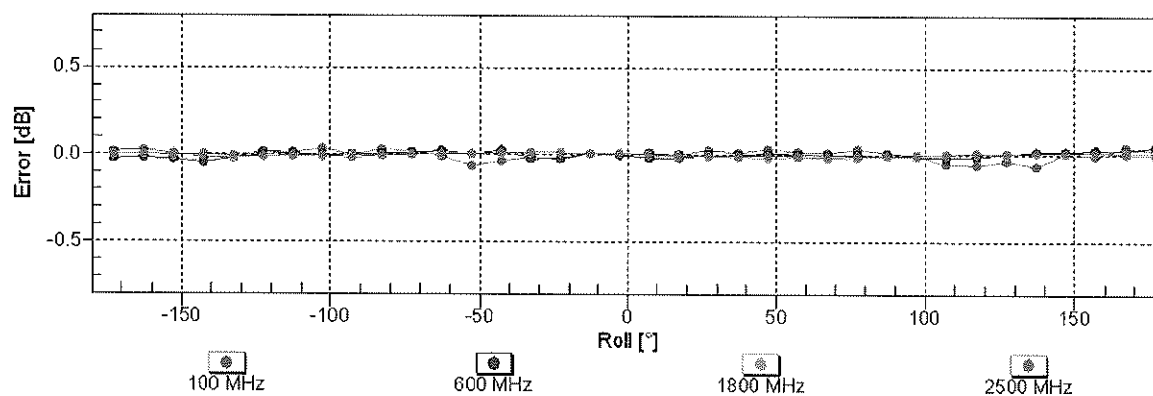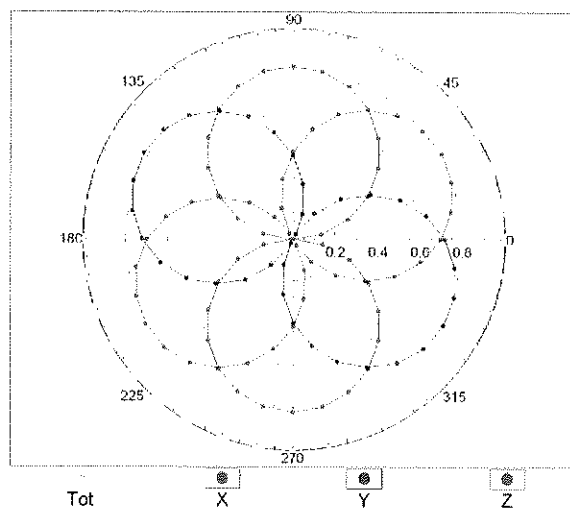


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

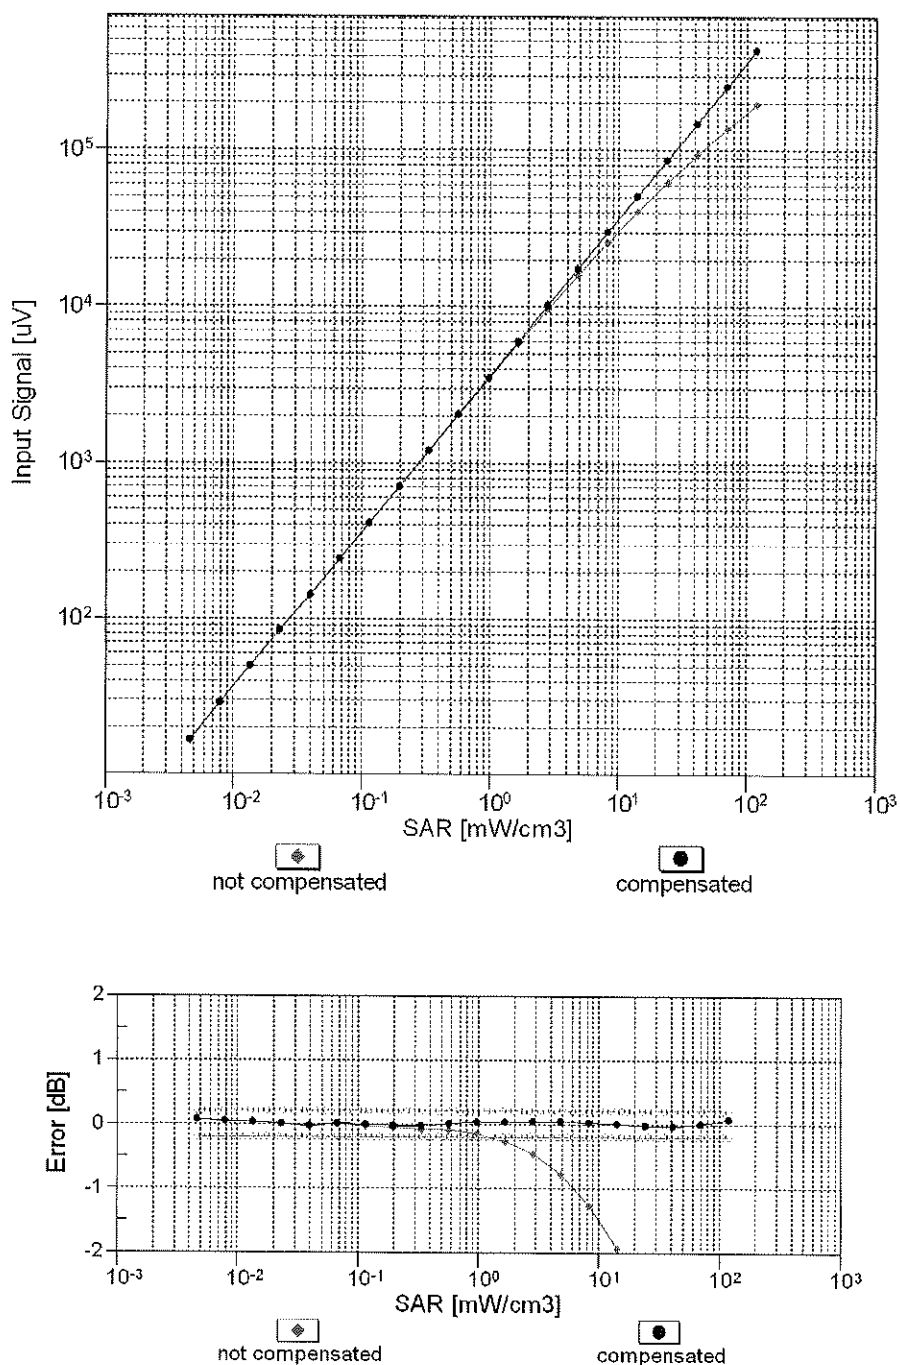



Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

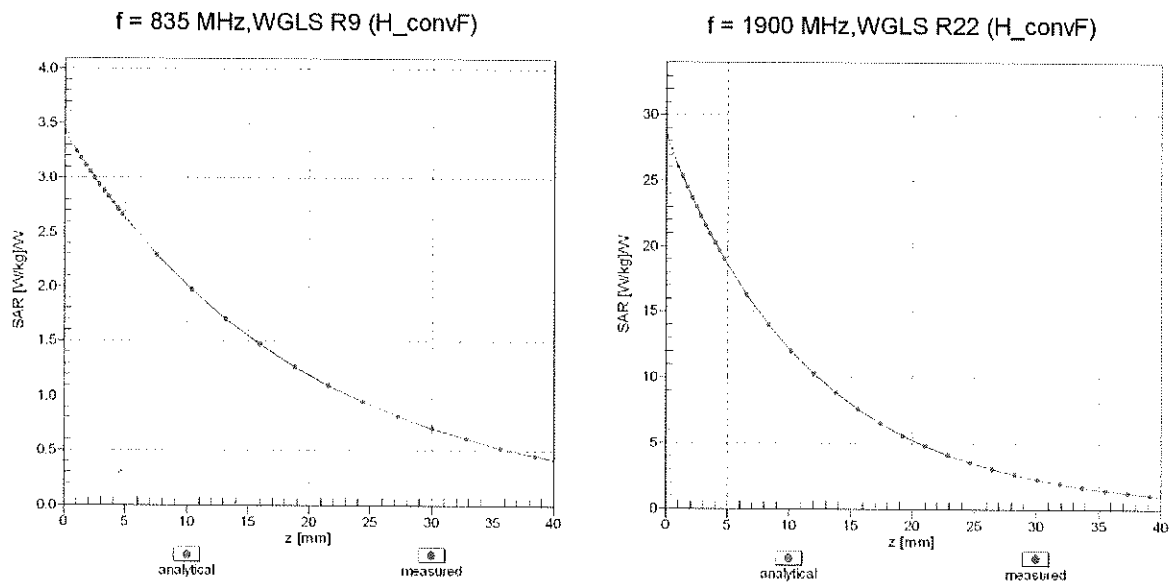

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

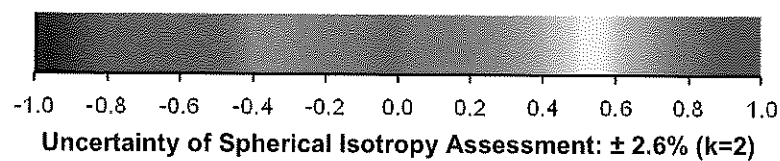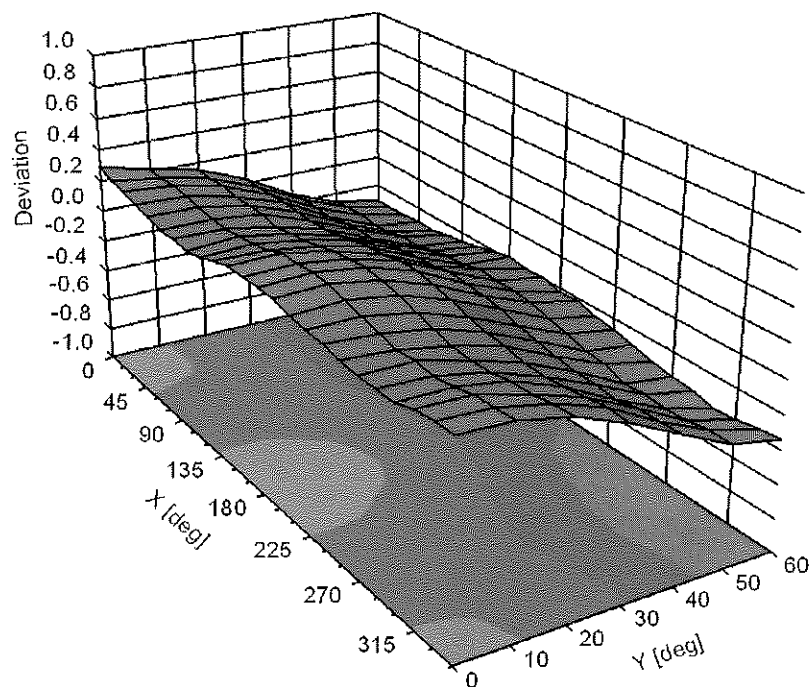

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^F (k=2)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 %
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 %
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 %
10062	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 %
10063	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 %
10064	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 %
10065	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 %
10066	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 %
10067	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 %
10068	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 %
10069	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 %
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 %
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 %
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 %
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6 %
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6 %
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6 %
10097	CAB	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6 %
10098	CAB	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 %
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6 %
10100	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6 %
10101	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10102	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10103	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 9.6 %
10105	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6 %
10108	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6 %

10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10114	CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10115	CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6 %
10116	CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6 %
10117	CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6 %
10118	CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	± 9.6 %
10119	CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6 %
10140	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10141	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	± 9.6 %
10142	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10143	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6 %
10144	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6 %
10145	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	± 9.6 %
10146	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6 %
10147	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6 %
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10151	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10153	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6 %
10154	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10155	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10156	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6 %
10157	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10158	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6 %
10160	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6 %
10161	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10162	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6 %
10166	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6 %
10167	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 %
10168	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6 %
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10170	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10171	AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	± 9.6 %
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10173	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10174	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10175	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10176	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10177	CAI	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10178	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10179	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10181	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10182	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10183	AAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10184	CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10185	CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	± 9.6 %
10186	AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10187	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10188	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10189	AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10193	CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	± 9.6 %
10194	CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	± 9.6 %
10195	CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	± 9.6 %
10196	CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10197	CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10198	CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10219	CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	± 9.6 %

10220	CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	± 9.6 %
10223	CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	± 9.6 %
10224	CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	± 9.6 %
10225	CAB	UMTS-FDD (HSPA+)	WCDMA	5.97	± 9.6 %
10226	CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	± 9.6 %
10227	CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	± 9.6 %
10228	CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 9.6 %
10229	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	± 9.6 %
10232	CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10233	CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10234	CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10235	CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10236	CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10237	CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10238	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10239	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10240	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10241	CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	± 9.6 %
10242	CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	± 9.6 %
10243	CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	± 9.6 %
10244	CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10245	CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	± 9.6 %
10246	CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10247	CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	± 9.6 %
10248	CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	± 9.6 %
10249	CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10250	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	± 9.6 %
10251	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	± 9.6 %
10252	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	± 9.6 %
10254	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	± 9.6 %
10255	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	± 9.6 %
10256	CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	± 9.6 %
10257	CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	± 9.6 %
10258	CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	± 9.6 %
10259	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	± 9.6 %
10260	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	± 9.6 %
10261	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10262	CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	± 9.6 %
10263	CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	± 9.6 %
10264	CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	± 9.6 %
10265	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10266	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	± 9.6 %
10267	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10269	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 9.6 %
10270	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	± 9.6 %
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	± 9.6 %
10275	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	± 9.6 %
10277	CAA	PHS (QPSK)	PHS	11.81	± 9.6 %
10278	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6 %
10279	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	± 9.6 %
10290	AAB	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10291	AAB	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	± 9.6 %
10293	AAB	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6 %
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6 %
10297	AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6 %
10298	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10299	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	± 9.6 %

10300	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10301	AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WiMAX	12.03	± 9.6 %
10302	AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	WiMAX	12.57	± 9.6 %
10303	AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	12.52	± 9.6 %
10304	AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	11.86	± 9.6 %
10305	AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	WiMAX	15.24	± 9.6 %
10306	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	WiMAX	14.67	± 9.6 %
10307	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	WiMAX	14.49	± 9.6 %
10308	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WiMAX	14.46	± 9.6 %
10309	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	WiMAX	14.58	± 9.6 %
10310	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	WiMAX	14.57	± 9.6 %
10311	AAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	± 9.6 %
10313	AAA	iDEN 1:3	iDEN	10.51	± 9.6 %
10314	AAA	iDEN 1:6	iDEN	13.48	± 9.6 %
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	± 9.6 %
10316	AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	± 9.6 %
10317	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	± 9.6 %
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	± 9.6 %
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	± 9.6 %
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.6 %
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	± 9.6 %
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	± 9.6 %
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	± 9.6 %
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	± 9.6 %
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	± 9.6 %
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 9.6 %
10400	AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	WLAN	8.37	± 9.6 %
10401	AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	± 9.6 %
10402	AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	± 9.6 %
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 9.6 %
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.6 %
10406	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	± 9.6 %
10410	AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	LTE-TDD	7.82	± 9.6 %
10414	AAA	WLAN CCDF, 64-QAM, 40MHz	Generic	8.54	± 9.6 %
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	± 9.6 %
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	± 9.6 %
10417	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	± 9.6 %
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	WLAN	8.14	± 9.6 %
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	WLAN	8.19	± 9.6 %
10422	AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	± 9.6 %
10423	AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	± 9.6 %
10424	AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	± 9.6 %
10425	AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	± 9.6 %
10426	AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	± 9.6 %
10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	± 9.6 %
10430	AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	± 9.6 %
10431	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	± 9.6 %
10432	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10434	AAA	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	± 9.6 %
10435	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10447	AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	± 9.6 %
10448	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	± 9.6 %
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	± 9.6 %
10450	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 9.6 %

10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	± 9.6 %
10456	AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	± 9.6 %
10457	AAA	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	± 9.6 %
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	± 9.6 %
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 9.6 %
10460	AAA	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	± 9.6 %
10461	AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10462	AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	± 9.6 %
10463	AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	± 9.6 %
10464	AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10465	AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10466	AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	± 9.6 %
10467	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10468	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10469	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	± 9.6 %
10470	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10471	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10472	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	± 9.6 %
10473	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10474	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10475	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	± 9.6 %
10477	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	± 9.6 %
10478	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	± 9.6 %
10479	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %
10480	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	± 9.6 %
10481	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	± 9.6 %
10482	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	± 9.6 %
10483	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	± 9.6 %
10484	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	± 9.6 %
10485	AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.59	± 9.6 %
10486	AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	± 9.6 %
10487	AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	± 9.6 %
10488	AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.70	± 9.6 %
10489	AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	± 9.6 %
10490	AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	± 9.6 %
10491	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %

10492	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	± 9.6 %
10493	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	± 9.6 %
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	± 9.6 %
10496	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	± 9.6 %
10497	AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	± 9.6 %
10498	AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	± 9.6 %
10499	AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.68	± 9.6 %
10500	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	± 9.6 %
10501	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	± 9.6 %
10502	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	± 9.6 %
10503	AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	± 9.6 %
10504	AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	± 9.6 %
10505	AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	± 9.6 %
10506	AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %
10507	AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	± 9.6 %
10508	AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	± 9.6 %
10509	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.99	± 9.6 %
10510	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	± 9.6 %
10511	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	± 9.6 %
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	± 9.6 %
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	± 9.6 %
10514	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	± 9.6 %
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	± 9.6 %
10516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	± 9.6 %
10517	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	± 9.6 %
10518	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.23	± 9.6 %
10519	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	± 9.6 %
10520	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.12	± 9.6 %
10521	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	± 9.6 %
10522	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10523	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.08	± 9.6 %
10524	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	± 9.6 %
10525	AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	WLAN	8.36	± 9.6 %
10526	AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10527	AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	WLAN	8.21	± 9.6 %
10528	AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	WLAN	8.36	± 9.6 %
10529	AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	WLAN	8.36	± 9.6 %
10531	AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	WLAN	8.43	± 9.6 %
10532	AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10533	AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	WLAN	8.38	± 9.6 %
10534	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	WLAN	8.45	± 9.6 %

10535	AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10536	AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	WLAN	8.32	± 9.6 %
10537	AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	WLAN	8.44	± 9.6 %
10538	AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	WLAN	8.54	± 9.6 %
10540	AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	WLAN	8.39	± 9.6 %
10541	AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	WLAN	8.46	± 9.6 %
10542	AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	WLAN	8.65	± 9.6 %
10543	AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	WLAN	8.65	± 9.6 %
10544	AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	WLAN	8.47	± 9.6 %
10545	AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	WLAN	8.55	± 9.6 %
10546	AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	WLAN	8.35	± 9.6 %
10547	AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	WLAN	8.49	± 9.6 %
10548	AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	WLAN	8.37	± 9.6 %
10550	AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	WLAN	8.38	± 9.6 %
10551	AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	WLAN	8.50	± 9.6 %
10552	AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10553	AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10554	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	WLAN	8.48	± 9.6 %
10555	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	WLAN	8.47	± 9.6 %
10556	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	WLAN	8.50	± 9.6 %
10557	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	WLAN	8.52	± 9.6 %
10558	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	WLAN	8.61	± 9.6 %
10560	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	WLAN	8.73	± 9.6 %
10561	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	WLAN	8.56	± 9.6 %
10562	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	WLAN	8.69	± 9.6 %
10563	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	WLAN	8.77	± 9.6 %
10564	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	± 9.6 %
10565	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10566	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	± 9.6 %
10567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	± 9.6 %
10568	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	± 9.6 %
10569	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.10	± 9.6 %
10570	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.30	± 9.6 %
10571	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	± 9.6 %
10572	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.99	± 9.6 %
10573	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	± 9.6 %
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	± 9.6 %
10575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	± 9.6 %
10576	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	± 9.6 %
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10578	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	± 9.6 %
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	± 9.6 %
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	± 9.6 %
10581	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	± 9.6 %
10582	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	± 9.6 %
10583	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	± 9.6 %
10584	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	± 9.6 %
10585	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10586	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	± 9.6 %
10587	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	± 9.6 %

10588	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	± 9.6 %
10589	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	± 9.6 %
10590	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	± 9.6 %
10591	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	WLAN	8.63	± 9.6 %
10592	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	WLAN	8.79	± 9.6 %
10593	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	WLAN	8.64	± 9.6 %
10594	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10595	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10596	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	WLAN	8.71	± 9.6 %
10597	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	WLAN	8.72	± 9.6 %
10598	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	WLAN	8.50	± 9.6 %
10599	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	WLAN	8.79	± 9.6 %
10600	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	WLAN	8.88	± 9.6 %
10601	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10602	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	WLAN	8.94	± 9.6 %
10603	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	WLAN	9.03	± 9.6 %
10604	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	WLAN	8.76	± 9.6 %
10605	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	WLAN	8.97	± 9.6 %
10606	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10607	AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	WLAN	8.64	± 9.6 %
10608	AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	WLAN	8.77	± 9.6 %
10609	AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	WLAN	8.57	± 9.6 %
10610	AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	WLAN	8.78	± 9.6 %
10611	AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10612	AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	WLAN	8.77	± 9.6 %
10613	AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	WLAN	8.94	± 9.6 %
10614	AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	WLAN	8.59	± 9.6 %
10615	AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10616	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10617	AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10618	AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	WLAN	8.58	± 9.6 %
10619	AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	WLAN	8.86	± 9.6 %
10620	AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	WLAN	8.87	± 9.6 %
10621	AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	WLAN	8.77	± 9.6 %
10622	AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	WLAN	8.68	± 9.6 %
10623	AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10624	AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	WLAN	8.96	± 9.6 %
10625	AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	WLAN	8.96	± 9.6 %
10626	AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	WLAN	8.83	± 9.6 %
10627	AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	WLAN	8.88	± 9.6 %
10628	AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	WLAN	8.71	± 9.6 %
10629	AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	WLAN	8.85	± 9.6 %
10630	AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	WLAN	8.72	± 9.6 %
10631	AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10632	AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10633	AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	WLAN	8.83	± 9.6 %
10634	AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	WLAN	8.80	± 9.6 %
10635	AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10636	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	WLAN	8.83	± 9.6 %
10637	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	WLAN	8.79	± 9.6 %
10638	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	WLAN	8.86	± 9.6 %
10639	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	WLAN	8.85	± 9.6 %
10640	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	WLAN	8.98	± 9.6 %
10641	AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	WLAN	9.06	± 9.6 %
10642	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	WLAN	9.06	± 9.6 %
10643	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	WLAN	8.89	± 9.6 %
10644	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	WLAN	9.05	± 9.6 %
10645	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	WLAN	9.11	± 9.6 %
10646	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	± 9.6 %
10647	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	± 9.6 %
10648	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	± 9.6 %
10652	AAD	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	± 9.6 %
10653	AAD	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	± 9.6 %
10654	AAD	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	± 9.6 %

10655	AAE	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	± 9.6 %
10658	AAA	Pulse Waveform (200Hz, 10%)	Test	10.00	± 9.6 %
10659	AAA	Pulse Waveform (200Hz, 20%)	Test	6.99	± 9.6 %
10660	AAA	Pulse Waveform (200Hz, 40%)	Test	3.98	± 9.6 %
10661	AAA	Pulse Waveform (200Hz, 60%)	Test	2.22	± 9.6 %
10662	AAA	Pulse Waveform (200Hz, 80%)	Test	0.97	± 9.6 %
10670	AAA	Bluetooth Low Energy	Bluetooth	2.19	± 9.6 %
10671	AAA	IEEE 802.11ax (20MHz, MCS0, 90pc duty cycle)	WLAN	9.09	± 9.6 %
10672	AAA	IEEE 802.11ax (20MHz, MCS1, 90pc duty cycle)	WLAN	8.57	± 9.6 %
10673	AAA	IEEE 802.11ax (20MHz, MCS2, 90pc duty cycle)	WLAN	8.78	± 9.6 %
10674	AAA	IEEE 802.11ax (20MHz, MCS3, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10675	AAA	IEEE 802.11ax (20MHz, MCS4, 90pc duty cycle)	WLAN	8.90	± 9.6 %
10676	AAA	IEEE 802.11ax (20MHz, MCS5, 90pc duty cycle)	WLAN	8.77	± 9.6 %
10677	AAA	IEEE 802.11ax (20MHz, MCS6, 90pc duty cycle)	WLAN	8.73	± 9.6 %
10678	AAA	IEEE 802.11ax (20MHz, MCS7, 90pc duty cycle)	WLAN	8.78	± 9.6 %
10679	AAA	IEEE 802.11ax (20MHz, MCS8, 90pc duty cycle)	WLAN	8.89	± 9.6 %
10680	AAA	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.80	± 9.6 %
10681	AAA	IEEE 802.11ax (20MHz, MCS10, 90pc duty cycle)	WLAN	8.62	± 9.6 %
10682	AAA	IEEE 802.11ax (20MHz, MCS11, 90pc duty cycle)	WLAN	8.83	± 9.6 %
10683	AAA	IEEE 802.11ax (20MHz, MCS0, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10684	AAA	IEEE 802.11ax (20MHz, MCS1, 99pc duty cycle)	WLAN	8.26	± 9.6 %
10685	AAA	IEEE 802.11ax (20MHz, MCS2, 99pc duty cycle)	WLAN	8.33	± 9.6 %
10686	AAA	IEEE 802.11ax (20MHz, MCS3, 99pc duty cycle)	WLAN	8.28	± 9.6 %
10687	AAA	IEEE 802.11ax (20MHz, MCS4, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10688	AAA	IEEE 802.11ax (20MHz, MCS5, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10689	AAA	IEEE 802.11ax (20MHz, MCS6, 99pc duty cycle)	WLAN	8.55	± 9.6 %
10690	AAA	IEEE 802.11ax (20MHz, MCS7, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10691	AAA	IEEE 802.11ax (20MHz, MCS8, 99pc duty cycle)	WLAN	8.25	± 9.6 %
10692	AAA	IEEE 802.11ax (20MHz, MCS9, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10693	AAA	IEEE 802.11ax (20MHz, MCS10, 99pc duty cycle)	WLAN	8.25	± 9.6 %
10694	AAA	IEEE 802.11ax (20MHz, MCS11, 99pc duty cycle)	WLAN	8.57	± 9.6 %
10695	AAA	IEEE 802.11ax (40MHz, MCS0, 90pc duty cycle)	WLAN	8.78	± 9.6 %
10696	AAA	IEEE 802.11ax (40MHz, MCS1, 90pc duty cycle)	WLAN	8.91	± 9.6 %
10697	AAA	IEEE 802.11ax (40MHz, MCS2, 90pc duty cycle)	WLAN	8.61	± 9.6 %
10698	AAA	IEEE 802.11ax (40MHz, MCS3, 90pc duty cycle)	WLAN	8.89	± 9.6 %
10699	AAA	IEEE 802.11ax (40MHz, MCS4, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10700	AAA	IEEE 802.11ax (40MHz, MCS5, 90pc duty cycle)	WLAN	8.73	± 9.6 %
10701	AAA	IEEE 802.11ax (40MHz, MCS6, 90pc duty cycle)	WLAN	8.86	± 9.6 %
10702	AAA	IEEE 802.11ax (40MHz, MCS7, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10703	AAA	IEEE 802.11ax (40MHz, MCS8, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10704	AAA	IEEE 802.11ax (40MHz, MCS9, 90pc duty cycle)	WLAN	8.56	± 9.6 %
10705	AAA	IEEE 802.11ax (40MHz, MCS10, 90pc duty cycle)	WLAN	8.69	± 9.6 %
10706	AAA	IEEE 802.11ax (40MHz, MCS11, 90pc duty cycle)	WLAN	8.66	± 9.6 %
10707	AAA	IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle)	WLAN	8.32	± 9.6 %
10708	AAA	IEEE 802.11ax (40MHz, MCS1, 99pc duty cycle)	WLAN	8.55	± 9.6 %
10709	AAA	IEEE 802.11ax (40MHz, MCS2, 99pc duty cycle)	WLAN	8.33	± 9.6 %
10710	AAA	IEEE 802.11ax (40MHz, MCS3, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10711	AAA	IEEE 802.11ax (40MHz, MCS4, 99pc duty cycle)	WLAN	8.39	± 9.6 %
10712	AAA	IEEE 802.11ax (40MHz, MCS5, 99pc duty cycle)	WLAN	8.67	± 9.6 %
10713	AAA	IEEE 802.11ax (40MHz, MCS6, 99pc duty cycle)	WLAN	8.33	± 9.6 %
10714	AAA	IEEE 802.11ax (40MHz, MCS7, 99pc duty cycle)	WLAN	8.26	± 9.6 %
10715	AAA	IEEE 802.11ax (40MHz, MCS8, 99pc duty cycle)	WLAN	8.45	± 9.6 %
10716	AAA	IEEE 802.11ax (40MHz, MCS9, 99pc duty cycle)	WLAN	8.30	± 9.6 %
10717	AAA	IEEE 802.11ax (40MHz, MCS10, 99pc duty cycle)	WLAN	8.48	± 9.6 %
10718	AAA	IEEE 802.11ax (40MHz, MCS11, 99pc duty cycle)	WLAN	8.24	± 9.6 %
10719	AAA	IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10720	AAA	IEEE 802.11ax (80MHz, MCS1, 90pc duty cycle)	WLAN	8.87	± 9.6 %
10721	AAA	IEEE 802.11ax (80MHz, MCS2, 90pc duty cycle)	WLAN	8.76	± 9.6 %
10722	AAA	IEEE 802.11ax (80MHz, MCS3, 90pc duty cycle)	WLAN	8.55	± 9.6 %
10723	AAA	IEEE 802.11ax (80MHz, MCS4, 90pc duty cycle)	WLAN	8.70	± 9.6 %
10724	AAA	IEEE 802.11ax (80MHz, MCS5, 90pc duty cycle)	WLAN	8.90	± 9.6 %
10725	AAA	IEEE 802.11ax (80MHz, MCS6, 90pc duty cycle)	WLAN	8.74	± 9.6 %
10726	AAA	IEEE 802.11ax (80MHz, MCS7, 90pc duty cycle)	WLAN	8.72	± 9.6 %
10727	AAA	IEEE 802.11ax (80MHz, MCS8, 90pc duty cycle)	WLAN	8.66	± 9.6 %

10728	AAA	IEEE 802.11ax (80MHz, MCS9, 90pc duty cycle)	WLAN	8.65	± 9.6 %
10729	AAA	IEEE 802.11ax (80MHz, MCS10, 90pc duty cycle)	WLAN	8.64	± 9.6 %
10730	AAA	IEEE 802.11ax (80MHz, MCS11, 90pc duty cycle)	WLAN	8.67	± 9.6 %
10731	AAA	IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10732	AAA	IEEE 802.11ax (80MHz, MCS1, 99pc duty cycle)	WLAN	8.46	± 9.6 %
10733	AAA	IEEE 802.11ax (80MHz, MCS2, 99pc duty cycle)	WLAN	8.40	± 9.6 %
10734	AAA	IEEE 802.11ax (80MHz, MCS3, 99pc duty cycle)	WLAN	8.25	± 9.6 %
10735	AAA	IEEE 802.11ax (80MHz, MCS4, 99pc duty cycle)	WLAN	8.33	± 9.6 %
10736	AAA	IEEE 802.11ax (80MHz, MCS5, 99pc duty cycle)	WLAN	8.27	± 9.6 %
10737	AAA	IEEE 802.11ax (80MHz, MCS6, 99pc duty cycle)	WLAN	8.36	± 9.6 %
10738	AAA	IEEE 802.11ax (80MHz, MCS7, 99pc duty cycle)	WLAN	8.42	± 9.6 %
10739	AAA	IEEE 802.11ax (80MHz, MCS8, 99pc duty cycle)	WLAN	8.29	± 9.6 %
10740	AAA	IEEE 802.11ax (80MHz, MCS9, 99pc duty cycle)	WLAN	8.48	± 9.6 %
10741	AAA	IEEE 802.11ax (80MHz, MCS10, 99pc duty cycle)	WLAN	8.40	± 9.6 %
10742	AAA	IEEE 802.11ax (80MHz, MCS11, 99pc duty cycle)	WLAN	8.43	± 9.6 %
10743	AAA	IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle)	WLAN	8.94	± 9.6 %
10744	AAA	IEEE 802.11ax (160MHz, MCS1, 90pc duty cycle)	WLAN	9.16	± 9.6 %
10745	AAA	IEEE 802.11ax (160MHz, MCS2, 90pc duty cycle)	WLAN	8.93	± 9.6 %
10746	AAA	IEEE 802.11ax (160MHz, MCS3, 90pc duty cycle)	WLAN	9.11	± 9.6 %
10747	AAA	IEEE 802.11ax (160MHz, MCS4, 90pc duty cycle)	WLAN	9.04	± 9.6 %
10748	AAA	IEEE 802.11ax (160MHz, MCS5, 90pc duty cycle)	WLAN	8.93	± 9.6 %
10749	AAA	IEEE 802.11ax (160MHz, MCS6, 90pc duty cycle)	WLAN	8.90	± 9.6 %
10750	AAA	IEEE 802.11ax (160MHz, MCS7, 90pc duty cycle)	WLAN	8.79	± 9.6 %
10751	AAA	IEEE 802.11ax (160MHz, MCS8, 90pc duty cycle)	WLAN	8.82	± 9.6 %
10752	AAA	IEEE 802.11ax (160MHz, MCS9, 90pc duty cycle)	WLAN	8.81	± 9.6 %
10753	AAA	IEEE 802.11ax (160MHz, MCS10, 90pc duty cycle)	WLAN	9.00	± 9.6 %
10754	AAA	IEEE 802.11ax (160MHz, MCS11, 90pc duty cycle)	WLAN	8.94	± 9.6 %
10755	AAA	IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle)	WLAN	8.64	± 9.6 %
10756	AAA	IEEE 802.11ax (160MHz, MCS1, 99pc duty cycle)	WLAN	8.77	± 9.6 %
10757	AAA	IEEE 802.11ax (160MHz, MCS2, 99pc duty cycle)	WLAN	8.77	± 9.6 %
10758	AAA	IEEE 802.11ax (160MHz, MCS3, 99pc duty cycle)	WLAN	8.69	± 9.6 %
10759	AAA	IEEE 802.11ax (160MHz, MCS4, 99pc duty cycle)	WLAN	8.58	± 9.6 %
10760	AAA	IEEE 802.11ax (160MHz, MCS5, 99pc duty cycle)	WLAN	8.49	± 9.6 %
10761	AAA	IEEE 802.11ax (160MHz, MCS6, 99pc duty cycle)	WLAN	8.58	± 9.6 %
10762	AAA	IEEE 802.11ax (160MHz, MCS7, 99pc duty cycle)	WLAN	8.49	± 9.6 %
10763	AAA	IEEE 802.11ax (160MHz, MCS8, 99pc duty cycle)	WLAN	8.53	± 9.6 %
10764	AAA	IEEE 802.11ax (160MHz, MCS9, 99pc duty cycle)	WLAN	8.54	± 9.6 %
10765	AAA	IEEE 802.11ax (160MHz, MCS10, 99pc duty cycle)	WLAN	8.54	± 9.6 %
10766	AAA	IEEE 802.11ax (160MHz, MCS11, 99pc duty cycle)	WLAN	8.51	± 9.6 %

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.