



PCTEST
18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctest.com>



MEASUREMENT REPORT

FCC PART 15.247 / ISSED RSS-247 Bluetooth

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

12/10/2019 - 02/15/2020

Test Site/Location:

PCTEST Morgan Hill, CA, USA

Test Report Serial No.:

1C1912170052-10.BCG

FCC ID:

BCGA2230

IC:

579C-A2230

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2230, A2231

EUT Type:

Tablet Device

Max. RF Output Power:

73.114 mW (18.64 dBm) Peak Conducted

Frequency Range:

2402 – 2480MHz

Type of Modulation:

GFSK, $\pi/4$ -DQPSK, 8DPSK

FCC Classification:

FCC Part 15 Spread Spectrum Transmitter (DSS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President



FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 1 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	6
2.4	Test Support Equipment	6
2.5	Test Configuration	6
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions	8
3.3	Radiated Emissions	9
3.4	Environmental Conditions	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA	12
7.0	TEST RESULTS	13
7.1	Summary	13
7.2	20dB Bandwidth Measurement	14
7.3	Output Power Measurement	23
7.3.1	Peak Output Power Measurement	24
7.3.2	Average Output Power Measurement	26
7.4	Band Edge Compliance	28
7.5	Carrier Frequency Separation	38
7.6	Time of Occupancy	43
7.7	Number of Hopping Channels	47
7.8	Conducted Spurious Emissions	52
7.9	Radiated Spurious Emission Measurements – Above 1GHz	59
7.10	Radiated Restricted Band Edge Measurement	74
7.11	Radiated Spurious Emissions Measurements – Below 1GHz	86
7.12	AC Line Conducted Measurement Data	91
8.	CONCLUSION	95

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 2 of 95

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISSED.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 3 of 95

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2230**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

Test Device Serial No.: DLXZN002P7GH, DLXZN003P7GG

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

This device supports BT Beamforming

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 2-1. Frequency/ Channel Operations

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 4 of 95

Notes:

1. This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles				
Bluetooth Mode		Duty Cycle (%)		
		ANT 4a	ANT 2a	TxBF
GFSK	ePA	100.0	100.0	100.0
	iPA	100.0	100.0	100.0
8DPSK	ePA	100.0	100.0	100.0
	iPA	100.0	100.0	100.0
$\pi/4$ -DQPSK	ePA	100.0	100.0	100.0
	iPA	100.0	100.0	100.0

Table 2-2. Measured Duty Cycles

2. This device supports simultaneous transmission operation, which allows for two transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Simultaneous Tx	Antenna							
	4a				2a			
	Config 1	Config 2	Config 3	Config 4	Config 5	Config 6	Config 7	Config 8
WIFI 2.4GHz	✓	✓	✗	✗	✓	✓	✗	✗
Bluetooth (1x, EDR, LE, HDR4, HDR8)	✗	✗	✓	✓	✗	✗	✓	✓
LTE Mid Bands	✓	✗	✓	✗	✓	✗	✓	✗
LTE High Bands	✗	✓	✗	✓	✗	✓	✗	✓

Table 2-3. Simultaneous Tx Configurations

✓ = Support ; ✗ = NOT Support

Worst Case Configuration

Description	Bluetooth BDR	LTE
Antenna	4a	4a
Channel	6	39750
Operating Frequency (MHz)	2480	2506
Mode/Modulation	GFSK ePA	QPSK/1RB/20MHz

Table 2-4. Worst Case Configuration

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 5 of 95

2.3 Antenna Description

Following antennas were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Ant 4a	Ant 2a
2.4	-2.2	-0.9

Table 2-5. Highest Antenna Gain

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

2.4 Test Support Equipment

1	Apple MacBook	Model: A1398	S/N: C2QKP008F6F3
	w/ AC/DC Adapter	Model: A1435	S/N: C04325505K1F288BG
2	Apple USB-C Cable	Model: Chimp	S/N: 304523
3	USB-C Cable	Model: A1997	S/N: N/A
	w / AC/DC Adapter	Model: A1720	S/N: C3D9274B06YLHDAE
4	Apple Pencil	Model: A2051	S/N: GQXYGSXCJKM9
5	DC Power Supply	Model: KPS3010D	S/N N/A

Table 2-6. Test Support Equipment Used

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

$\pi/4$ -DQPSK has been investigated and confirmed as not the worst case.

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 6 of 95



2.6 Software and Firmware

The test was conducted with firmware version 17E228 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 7 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.12. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.35.04.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 8 of 95

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 9 of 95

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 10 of 95

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.29
Conducted Disturbance	2.48
Radiated Disturbance (<1GHz)	4.15
Radiated Disturbance (>1GHz)	4.70
Radiated Disturbance (>18GHz)	5.01

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 11 of 95

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/13/2019	Annual	3/13/2020	MY49430244
Anritsu	ML2496A	Power Meter	10/29/2019	Annual	10/29/2020	184005
Anritsu	MA2411B	Pulse Power Sensor	10/29/2019	Annual	10/29/2020	1726261
Anritsu	MA2411B	Pulse Power Sensor	10/29/2019	Annual	10/29/2020	1726262
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	10/29/2019	Annual	10/29/2020	T058701-02
COM-POWER	LIN-120A	LISN	3/13/2019	Annual	3/13/2020	241297
ETS-Lindgren	3142E-PA	Pre-Amplifier (30MHz - 6GHz)	9/19/2019	Annual	9/19/2020	213236
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	8/14/2019	Annual	8/14/2020	224569
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/12/2019	Annual	3/12/2020	205956
Rohde & Schwarz	ESW26	EMI Test Receiver	5/21/2019	Annual	5/21/2020	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	7/27/2019	Annual	7/27/2020	101668
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	9/19/2019	Annual	9/19/2020	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/14/2019	Annual	11/14/2020	101057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/21/2019	Annual	3/21/2020	100519

Table 6-1. Annual Test Equipment Calibration Schedule

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 12 of 95

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2230
 Method/System: Frequency Hopping Spread Spectrum (FHSS)
 Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)(iii)	RSS-247 [5.1(a)]	20dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.247(b)(1)	RSS-247 [5.4(b)]	Peak Transmitter Output Power	< 1 Watt if ≥ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(b)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(d)]	Number of Channels	> 15 Channels		PASS	Section 7.7
15.247(a)(1)(iii)	RSS-247 [5.1(d)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	Conducted > 20dBc		PASS	Section 7.4, Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.10, Section 7.11
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.12

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "BT Auto," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.0.

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 13 of 95

7.2 20dB Bandwidth Measurement

§15.247 (a.1.iii); RSS-247 [5.1(a)]

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

Both power schemes were investigated, and only the worst case is reported.


FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 14 of 95

Ant 4a


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	ePA	0	951.00
2441	1.0	GFSK	ePA	39	951.70
2480	1.0	GFSK	ePA	78	951.10
2402	3.0	8DPSK	ePA	0	1358.00
2441	3.0	8DPSK	ePA	39	1358.00
2480	3.0	8DPSK	ePA	78	1360.00

Table 7-2. Conducted 20dB Bandwidth Measurements Ant 4a

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 15 of 95

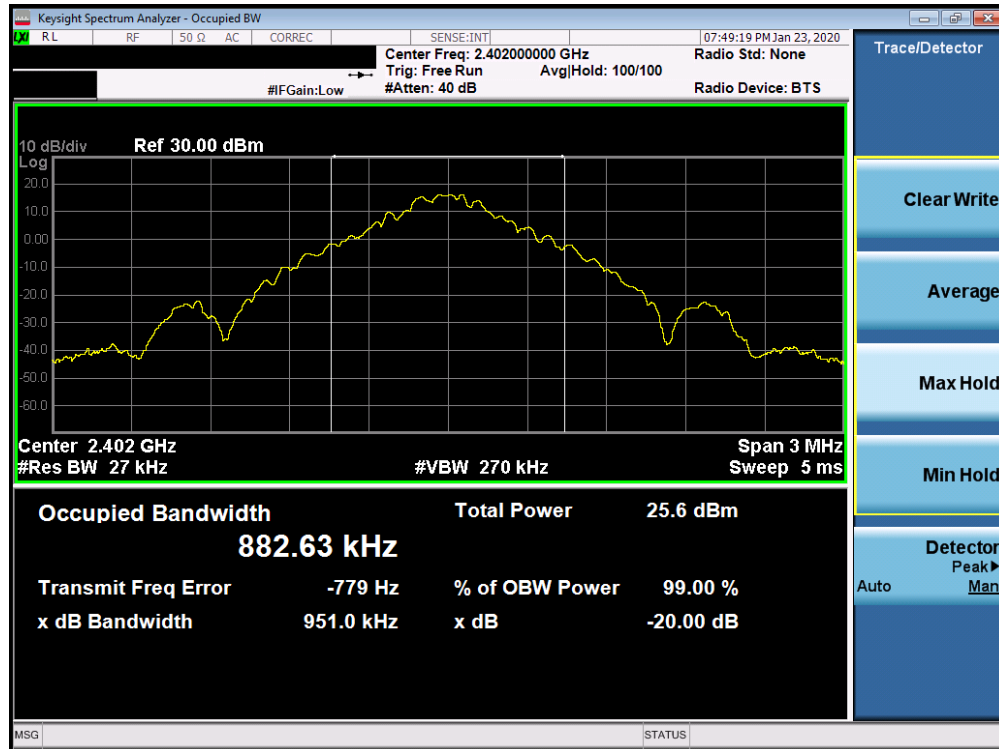


Plot 7-1. 20dB Bandwidth Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 0)

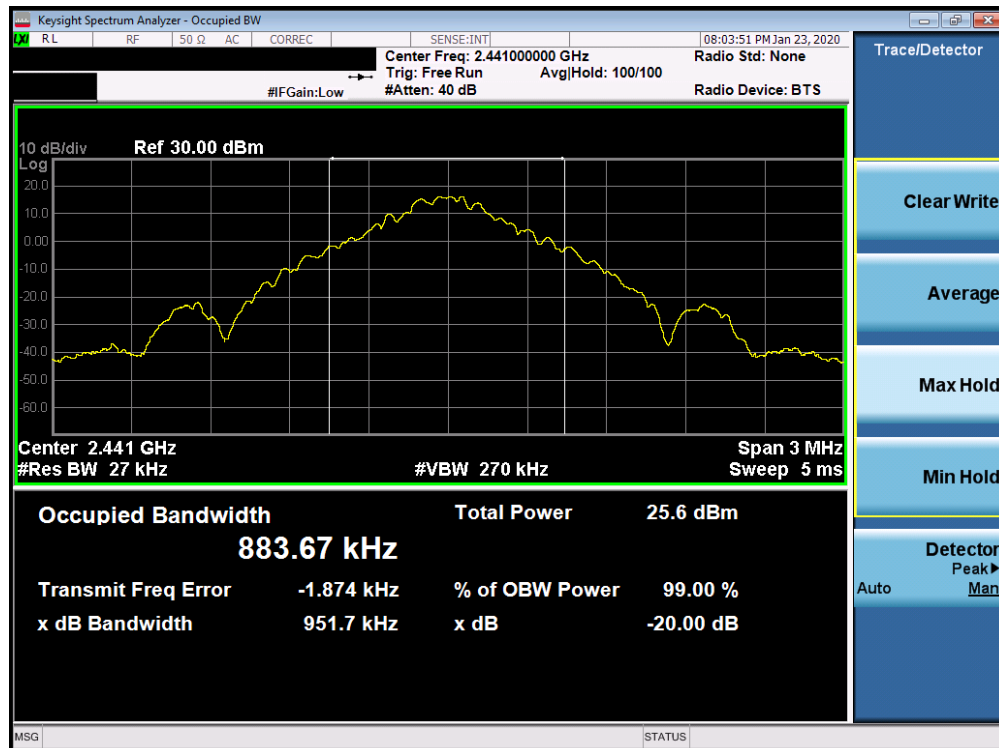


Plot 7-2. 20dB Bandwidth Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 16 of 95

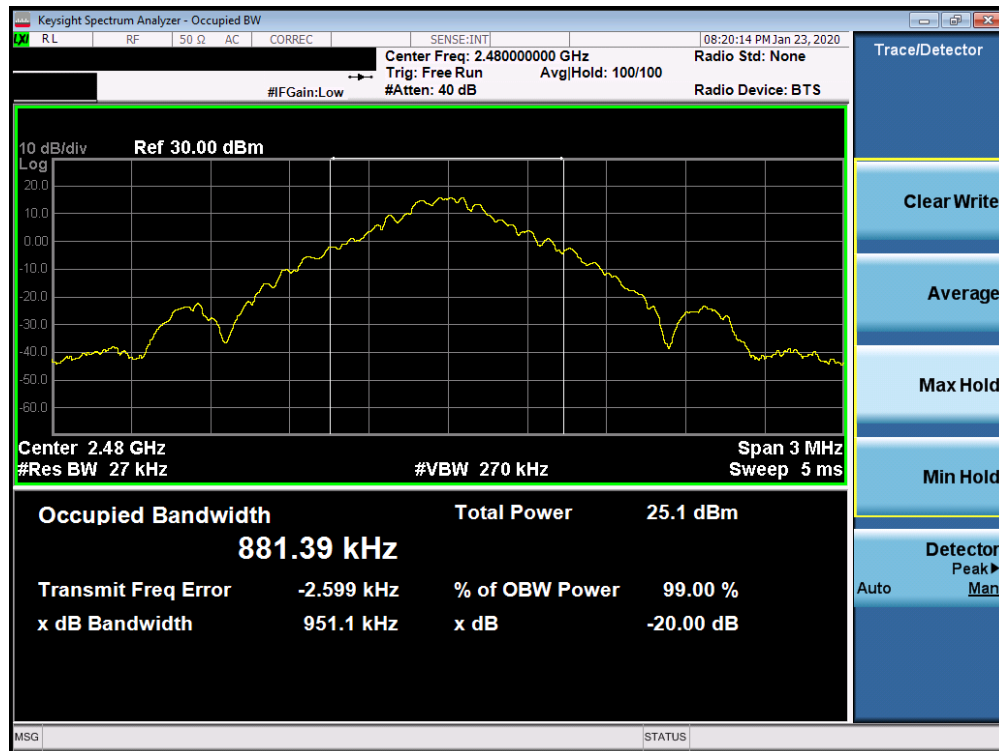


Plot 7-3. 20dB Bandwidth Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 78)

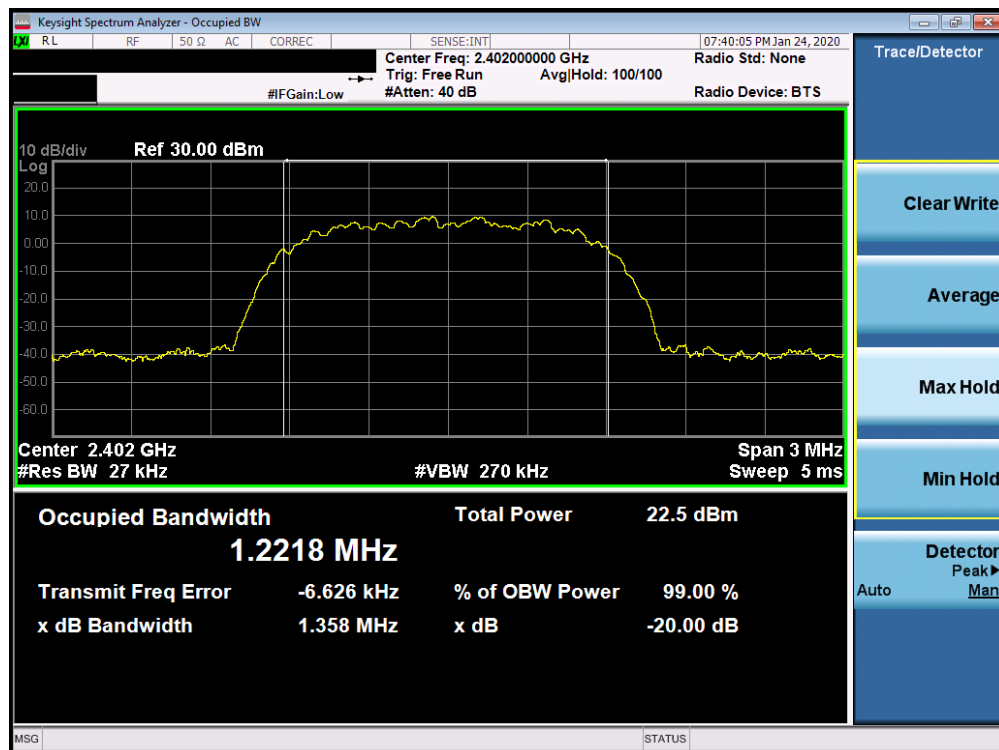


Plot 7-4. 20dB Bandwidth Plot Ant 4a (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 17 of 95

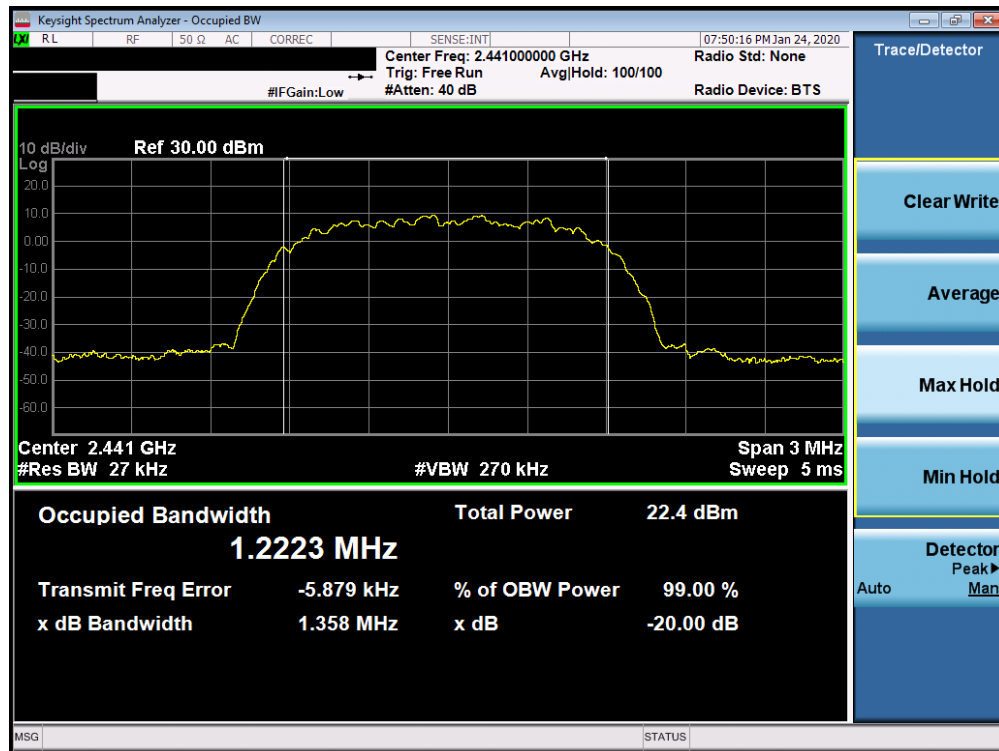

Plot 7-5. 20dB Bandwidth Plot Ant 4a (Bluetooth, 8DPSK, ePA – Ch. 39)

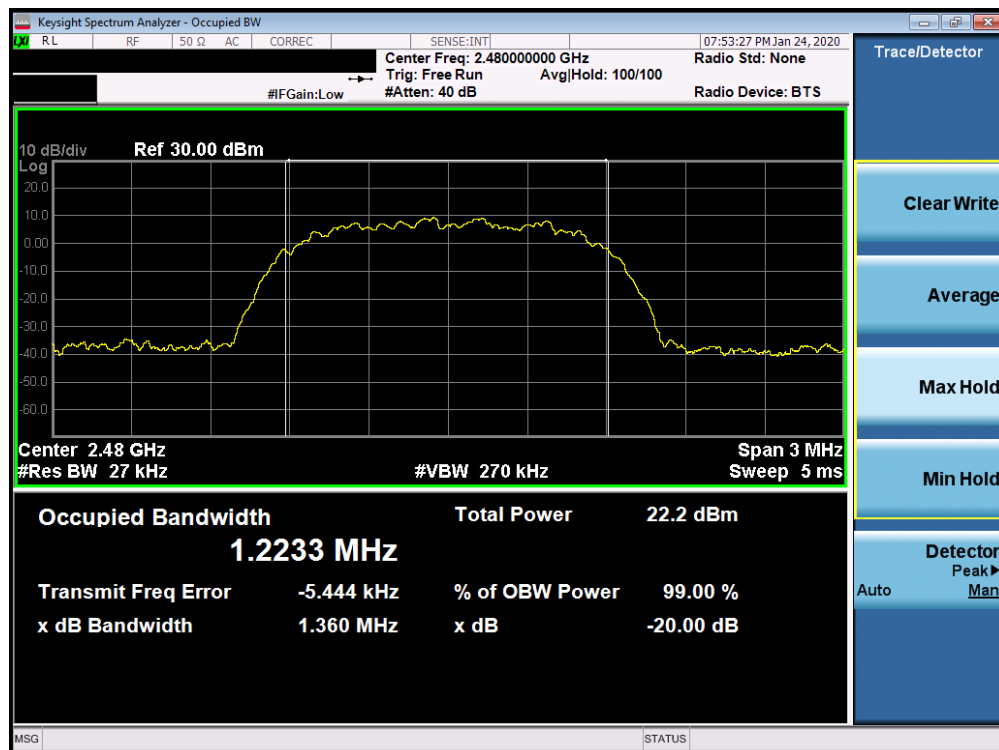

Plot 7-6. 20dB Bandwidth Plot Ant 4a (Bluetooth, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 18 of 95

Ant 2a


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	ePA	0	953.00
2441	1.0	GFSK	ePA	39	950.80
2480	1.0	GFSK	ePA	78	951.70
2402	3.0	8DPSK	ePA	0	1360.00
2441	3.0	8DPSK	ePA	39	1361.00
2480	3.0	8DPSK	ePA	78	1361.00

Table 7-3. Conducted 20dB Bandwidth Measurements Ant 2a

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 19 of 95

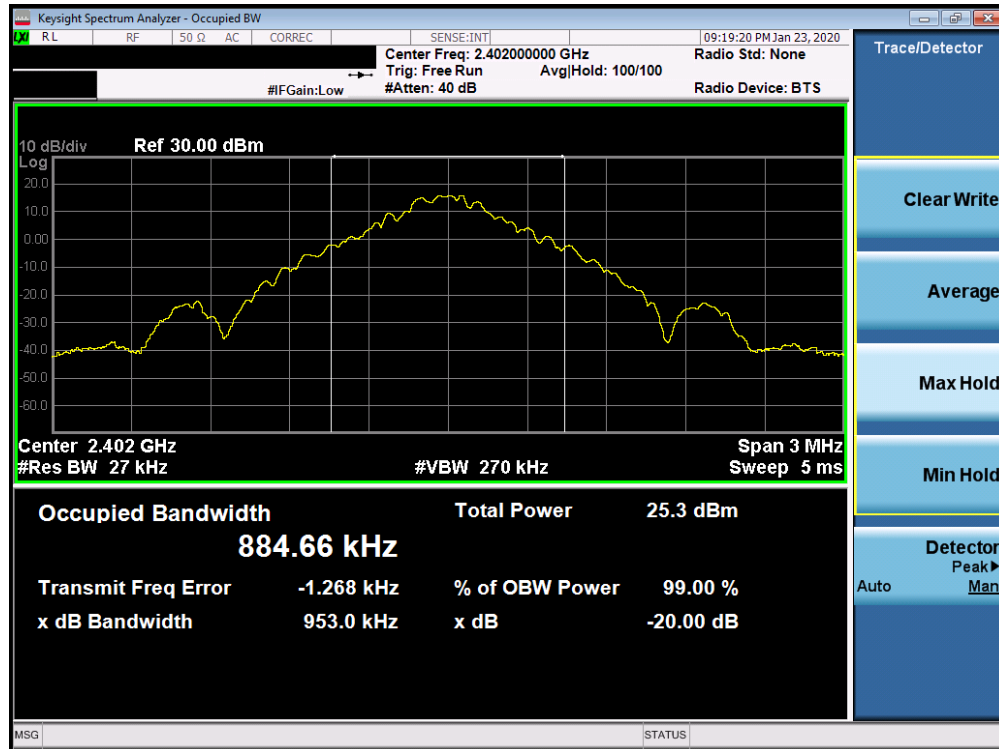


Plot 7-7. 20dB Bandwidth Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 0)

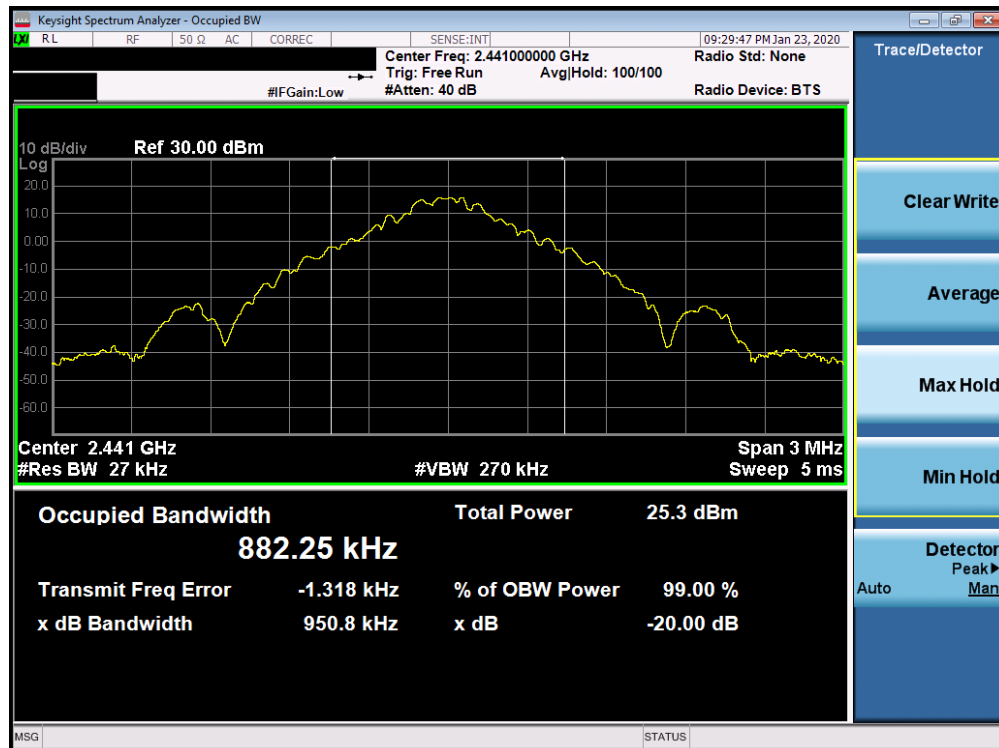


Plot 7-8. 20dB Bandwidth Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 20 of 95

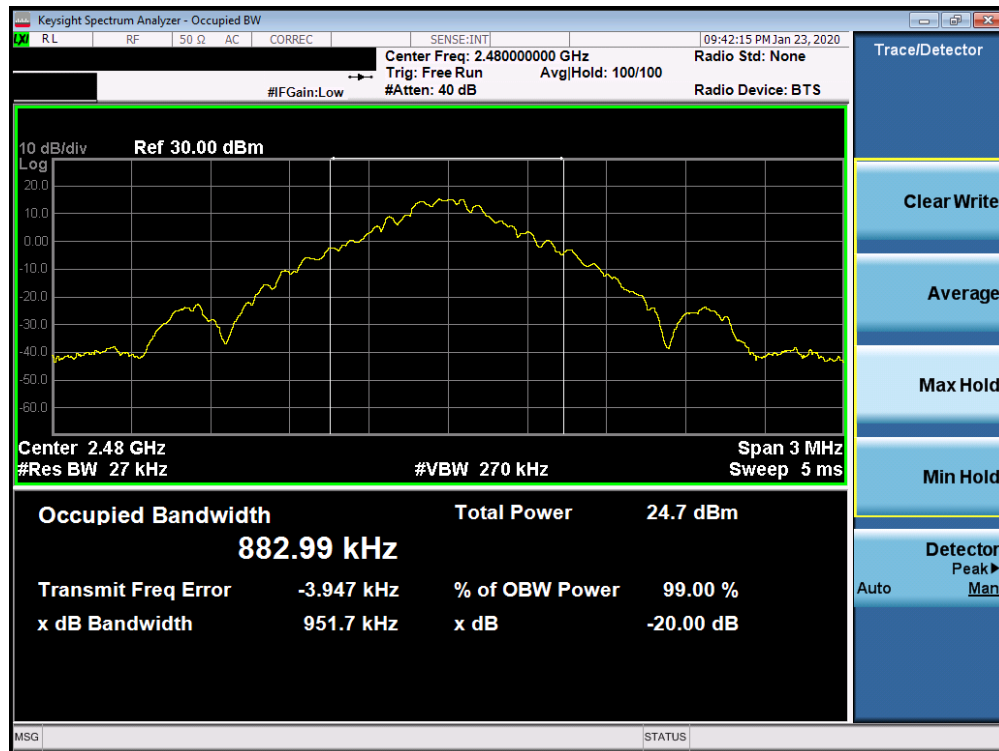


Plot 7-9. 20dB Bandwidth Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 78)

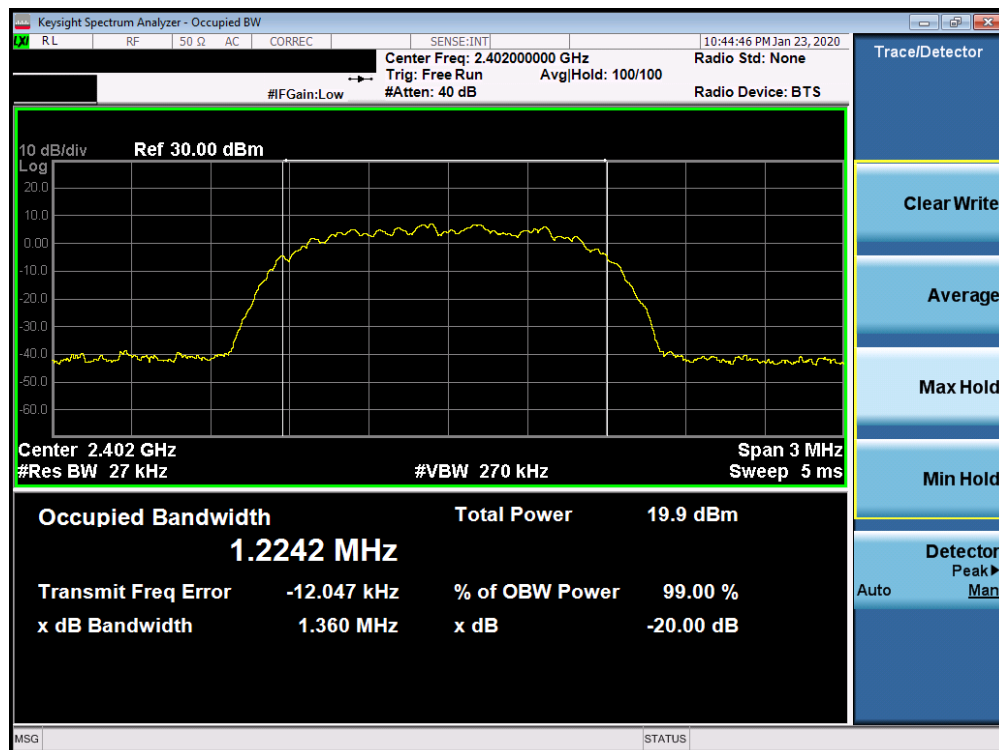


Plot 7-10. 20dB Bandwidth Plot Ant 2a (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 21 of 95

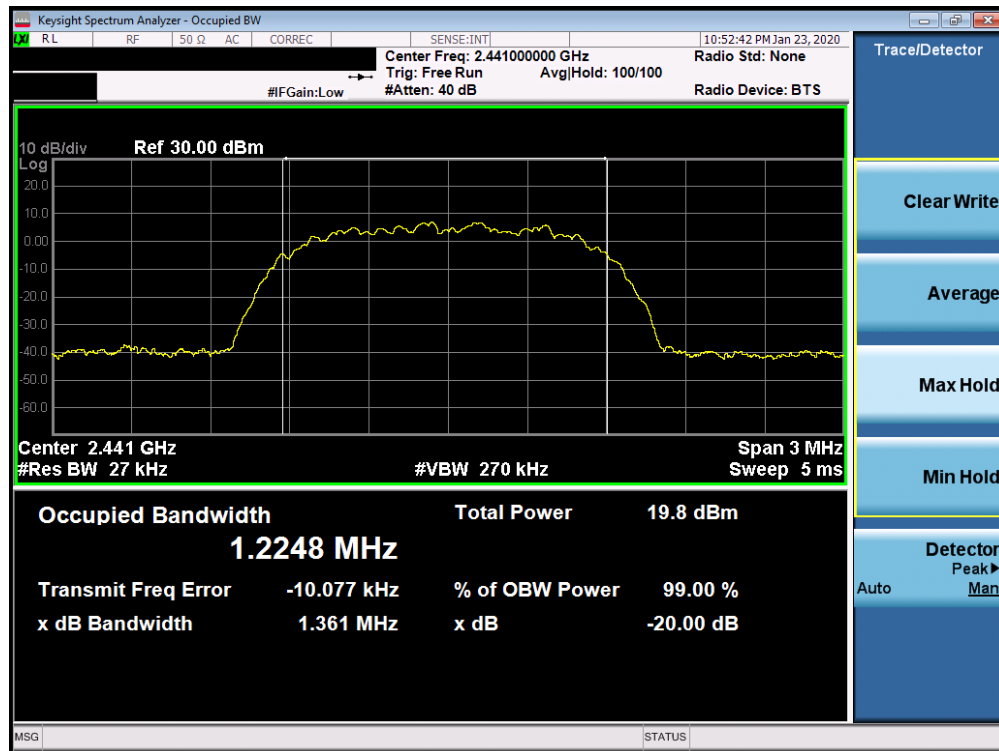

Plot 7-11. 20dB Bandwidth Plot Ant 2a (Bluetooth, 8DPSK, ePA – Ch. 39)

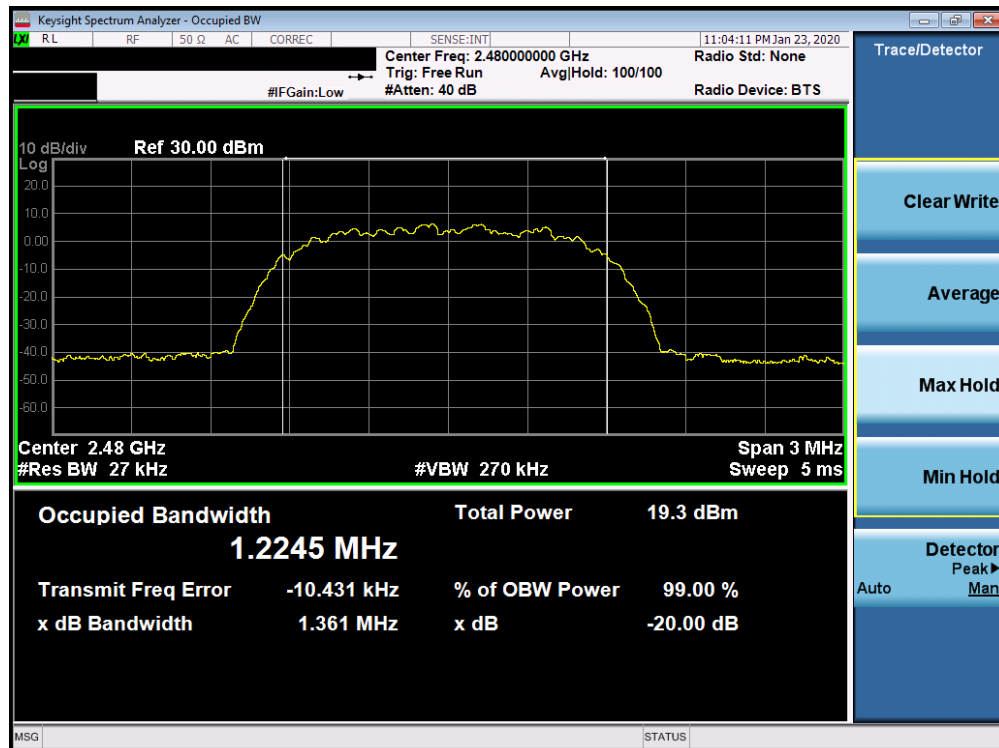

Plot 7-12. 20dB Bandwidth Plot Ant 2a (Bluetooth, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 22 of 95

7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(b)]

Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. Peak and Average power measurements are performed using a broadband power meter with a pulse sensor.

The maximum permissible output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

Test Settings

Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement

Note

1. This unit was tested with all possible data rates and the highest peak power is reported with the unit transmitting at GFSK and 8DPSK.

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 23 of 95

7.3.1 Peak Output Power Measurement

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
					[dBm]	[mW]				
2402	1.0	GFSK	ePA	0	14.21	26.363	-2.20	12.01	36.02	-24.01
2441	1.0	GFSK	ePA	39	14.42	27.669	-2.20	12.22	36.02	-23.80
2480	1.0	GFSK	ePA	78	14.36	27.290	-2.20	12.16	36.02	-23.86
2402	1.0	GFSK	iPA	0	11.93	15.596	-2.20	9.73	36.02	-26.29
2441	1.0	GFSK	iPA	39	11.45	13.964	-2.20	9.25	36.02	-26.77
2480	1.0	GFSK	iPA	78	11.72	14.859	-2.20	9.52	36.02	-26.50
2402	3.0	8DPSK	ePA	0	16.63	46.026	-2.20	14.43	36.02	-21.59
2441	3.0	8DPSK	ePA	39	16.67	46.452	-2.20	14.47	36.02	-21.55
2480	3.0	8DPSK	ePA	78	16.43	43.954	-2.20	14.23	36.02	-21.79
2402	3.0	8DPSK	iPA	0	10.30	10.715	-2.20	8.10	36.02	-27.92
2441	3.0	8DPSK	iPA	39	10.35	10.839	-2.20	8.15	36.02	-27.87
2480	3.0	8DPSK	iPA	78	10.04	10.093	-2.20	7.84	36.02	-28.18

Table 7-4. Ant 4a Peak Conducted Output Power Measurements

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
					[dBm]	[mW]				
2402	1.0	GFSK	ePA	0	14.28	26.792	-0.90	13.38	36.02	-22.64
2441	1.0	GFSK	ePA	39	14.32	27.040	-0.90	13.42	36.02	-22.60
2480	1.0	GFSK	ePA	78	14.22	26.424	-0.90	13.32	36.02	-22.70
2402	1.0	GFSK	iPA	0	10.34	10.814	-0.90	9.44	36.02	-26.58
2441	1.0	GFSK	iPA	39	10.06	10.139	-0.90	9.16	36.02	-26.86
2480	1.0	GFSK	iPA	78	10.33	10.789	-0.90	9.43	36.02	-26.59
2402	3.0	8DPSK	ePA	0	14.16	26.062	-0.90	13.26	36.02	-22.76
2441	3.0	8DPSK	ePA	39	14.01	25.177	-0.90	13.11	36.02	-22.91
2480	3.0	8DPSK	ePA	78	13.98	25.003	-0.90	13.08	36.02	-22.94
2402	3.0	8DPSK	iPA	0	8.21	6.622	-0.90	7.31	36.02	-28.71
2441	3.0	8DPSK	iPA	39	8.20	6.607	-0.90	7.30	36.02	-28.72
2480	3.0	8DPSK	iPA	78	8.18	6.577	-0.90	7.28	36.02	-28.74

Table 7-5. Ant 2a Peak Conducted Output Power Measurements

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 24 of 95

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power						Directional Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
					ANT 4a		ANT 2a		Summed					
					[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]				
2402	1.0	GFSK	ePA	0	14.19	26.242	14.10	25.704	17.16	52.000	1.48	18.64	36.02	-17.38
2441	1.0	GFSK	ePA	39	14.05	25.410	13.82	24.099	16.95	49.545	1.48	18.43	36.02	-17.59
2480	1.0	GFSK	ePA	78	14.17	26.122	13.76	23.768	16.98	49.888	1.48	18.46	36.02	-17.56
2402	1.0	GFSK	iPA	0	11.42	13.868	10.01	10.023	13.78	23.878	1.48	15.26	36.02	-20.76
2441	1.0	GFSK	iPA	39	11.58	14.388	10.13	10.304	13.93	24.717	1.48	15.41	36.02	-20.61
2480	1.0	GFSK	iPA	78	11.49	14.093	10.11	10.257	13.86	24.322	1.48	15.34	36.02	-20.68
2402	3.0	8DPSK	ePA	0	16.59	45.604	14.13	25.882	18.54	71.450	1.48	20.02	36.02	-16.00
2441	3.0	8DPSK	ePA	39	16.71	46.881	14.20	26.303	18.64	73.114	1.48	20.12	36.02	-15.90
2480	3.0	8DPSK	ePA	78	16.66	46.345	14.15	26.002	18.59	72.277	1.48	20.07	36.02	-15.95
2402	3.0	8DPSK	iPA	0	10.32	10.765	8.29	6.745	12.43	17.498	1.48	13.91	36.02	-22.11
2441	3.0	8DPSK	iPA	39	10.41	10.990	8.42	6.950	12.54	17.947	1.48	14.02	36.02	-22.00
2480	3.0	8DPSK	iPA	78	10.37	10.889	8.48	7.047	12.54	17.947	1.48	14.02	36.02	-22.00

Table 7-6. TxBF Peak Conducted Output Power Measurements

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 25 of 95

7.3.2 Average Output Power Measurement

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Avg Conducted Power		Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
					[dBm]	[mW]				
2402	1.0	GFSK	ePA	0	14.00	25.119	-2.20	11.80	36.02	-24.22
2441	1.0	GFSK	ePA	39	13.99	25.061	-2.20	11.79	36.02	-24.23
2480	1.0	GFSK	ePA	78	13.95	24.831	-2.20	11.75	36.02	-24.27
2402	1.0	GFSK	iPA	0	11.47	14.028	-2.20	9.27	36.02	-26.75
2441	1.0	GFSK	iPA	39	11.32	13.552	-2.20	9.12	36.02	-26.90
2480	1.0	GFSK	iPA	78	11.45	13.964	-2.20	9.25	36.02	-26.77
2402	3.0	8DPSK	ePA	0	13.42	21.979	-2.20	11.22	36.02	-24.80
2441	3.0	8DPSK	ePA	39	13.48	22.284	-2.20	11.28	36.02	-24.74
2480	3.0	8DPSK	ePA	78	13.37	21.727	-2.20	11.17	36.02	-24.85
2402	3.0	8DPSK	iPA	0	7.48	5.598	-2.20	5.28	36.02	-30.74
2441	3.0	8DPSK	iPA	39	7.41	5.508	-2.20	5.21	36.02	-30.81
2480	3.0	8DPSK	iPA	78	7.28	5.346	-2.20	5.08	36.02	-30.94

Table 7-7. Ant 4a Average Conducted Output Power Measurements

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Avg Conducted Power		Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
					[dBm]	[mW]				
2402	1.0	GFSK	ePA	0	14.00	25.119	-0.90	13.10	36.02	-22.92
2441	1.0	GFSK	ePA	39	13.96	24.889	-0.90	13.06	36.02	-22.96
2480	1.0	GFSK	ePA	78	13.87	24.378	-0.90	12.97	36.02	-23.05
2402	1.0	GFSK	iPA	0	9.97	9.931	-0.90	9.07	36.02	-26.95
2441	1.0	GFSK	iPA	39	9.81	9.572	-0.90	8.91	36.02	-27.11
2480	1.0	GFSK	iPA	78	9.84	9.638	-0.90	8.94	36.02	-27.08
2402	3.0	8DPSK	ePA	0	11.00	12.589	-0.90	10.10	36.02	-25.92
2441	3.0	8DPSK	ePA	39	10.88	12.246	-0.90	9.98	36.02	-26.04
2480	3.0	8DPSK	ePA	78	10.94	12.417	-0.90	10.04	36.02	-25.98
2402	3.0	8DPSK	iPA	0	5.42	3.483	-0.90	4.52	36.02	-31.50
2441	3.0	8DPSK	iPA	39	5.40	3.467	-0.90	4.50	36.02	-31.52
2480	3.0	8DPSK	iPA	78	5.47	3.524	-0.90	4.57	36.02	-31.45

Table 7-8. Ant 2a Average Conducted Output Power Measurements

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 26 of 95

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Average Conducted Power						Directional Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
					ANT 4a		ANT 2a		Summed					
					[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]				
2402	1.0	GFSK	ePA	0	13.99	25.061	14.00	25.119	17.01	50.234	1.48	18.49	36.02	-17.53
2441	1.0	GFSK	ePA	39	13.87	24.378	13.70	23.442	16.80	47.863	1.48	18.28	36.02	-17.74
2480	1.0	GFSK	ePA	78	13.99	25.061	13.66	23.227	16.84	48.306	1.48	18.32	36.02	-17.70
2402	1.0	GFSK	iPA	0	11.26	13.366	9.76	9.462	13.58	22.803	1.48	15.06	36.02	-20.96
2441	1.0	GFSK	iPA	39	11.42	13.868	9.90	9.772	13.74	23.659	1.48	15.22	36.02	-20.80
2480	1.0	GFSK	iPA	78	11.35	13.646	9.85	9.661	13.67	23.281	1.48	15.15	36.02	-20.87
2402	3.0	8DPSK	ePA	0	13.47	22.233	10.93	12.388	15.39	34.594	1.48	16.87	36.02	-19.15
2441	3.0	8DPSK	ePA	39	13.50	22.387	11.00	12.589	15.44	34.995	1.48	16.92	36.02	-19.10
2480	3.0	8DPSK	ePA	78	13.31	21.429	10.99	12.560	15.31	33.963	1.48	16.79	36.02	-19.23
2402	3.0	8DPSK	iPA	0	7.41	5.508	5.31	3.396	9.50	8.913	1.48	10.98	36.02	-25.04
2441	3.0	8DPSK	iPA	39	7.48	5.598	5.44	3.499	9.59	9.099	1.48	11.07	36.02	-24.95
2480	3.0	8DPSK	iPA	78	7.35	5.433	5.50	3.548	9.53	8.974	1.48	11.01	36.02	-25.01

Table 7-9. TxBF Average Conducted Output Power Measurements

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 27 of 95



7.4 Band Edge Compliance

§15.247 (d); RSS-247 [5.5]

Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. ***The maximum permissible out-of-band emission level is 20 dBc.***

Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 28 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.
2. Both power schemes were investigated and only the worst case is reported.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 29 of 95

Ant 4a

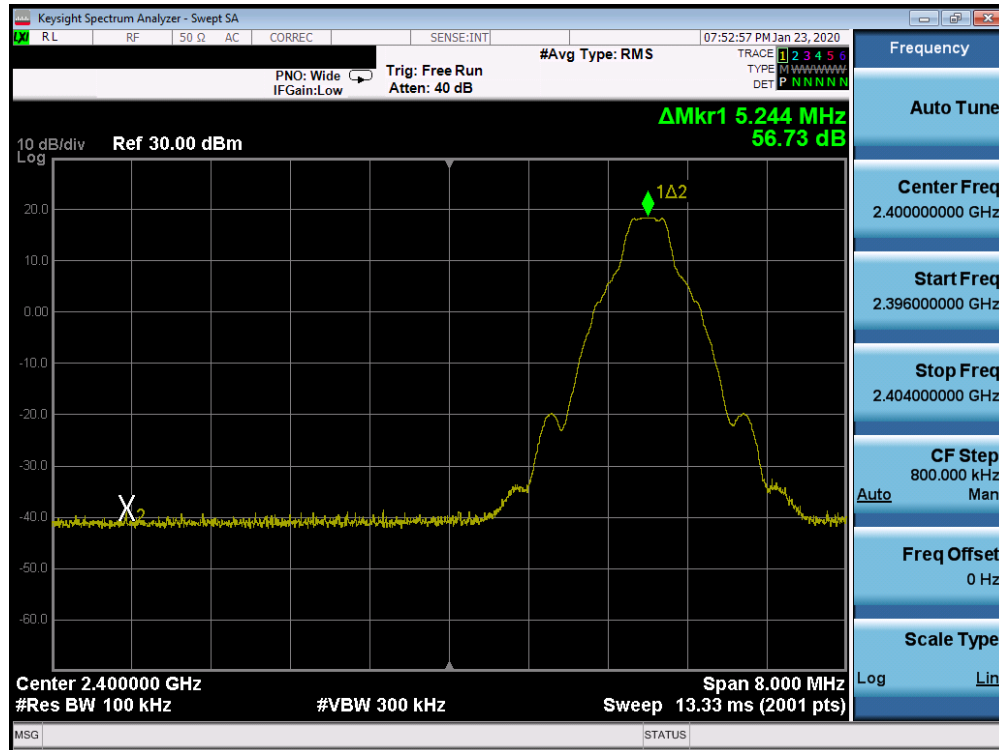


Plot 7-13. Band Edge Plot Ant 4a (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

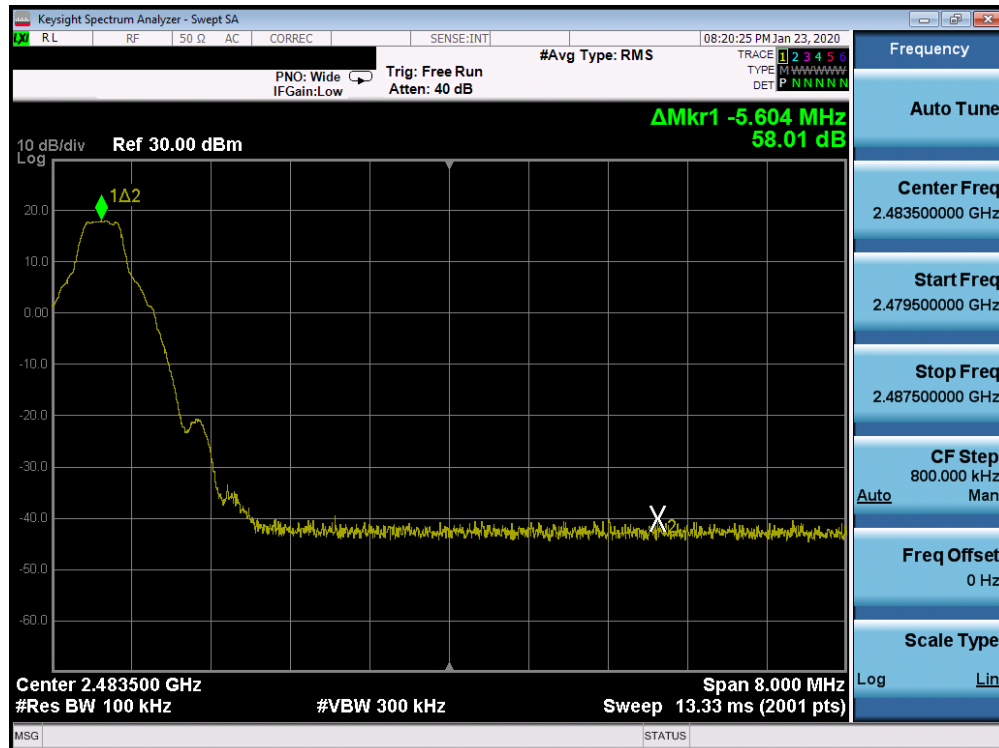


Plot 7-14. Band Edge Plot Ant 4a (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 30 of 95

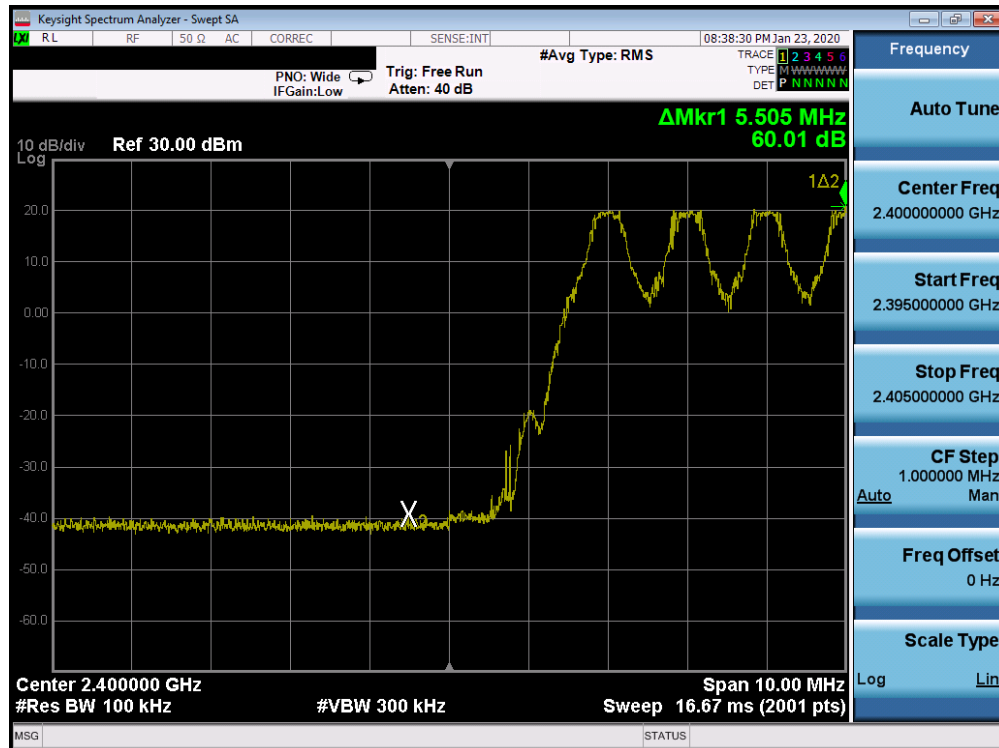


Plot 7-15. Band Edge Plot Ant 4a (Bluetooth with Hopping Enabled, GFSK, ePA)

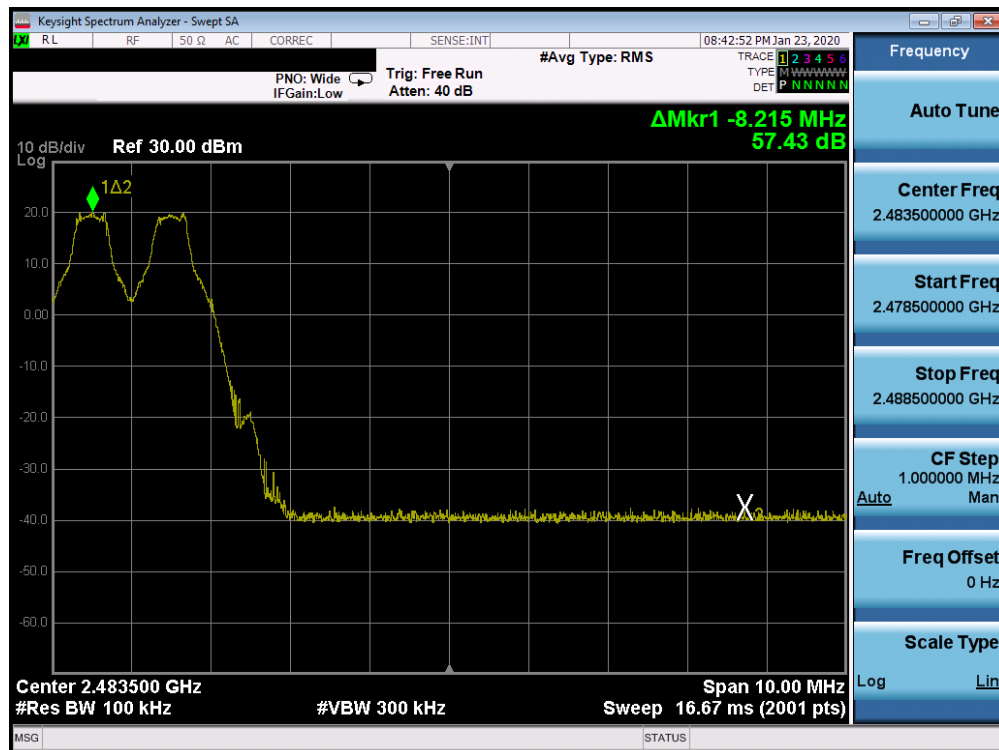


Plot 7-16. Band Edge Plot Ant 4a (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 31 of 95

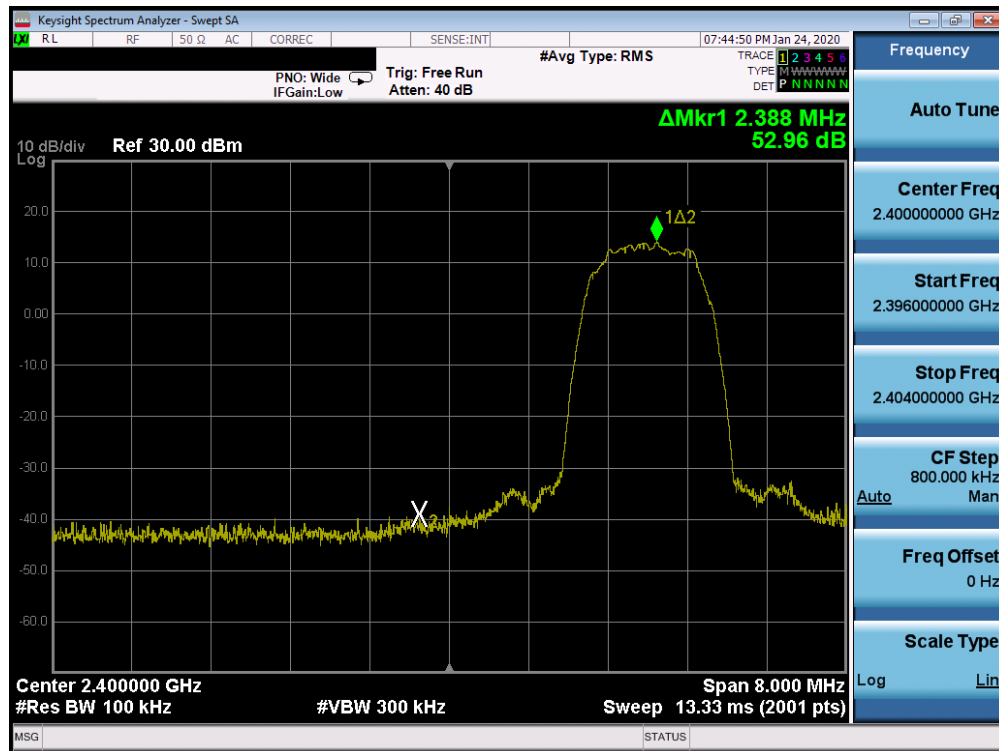


Plot 7-17. Band Edge Plot Ant 4a (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

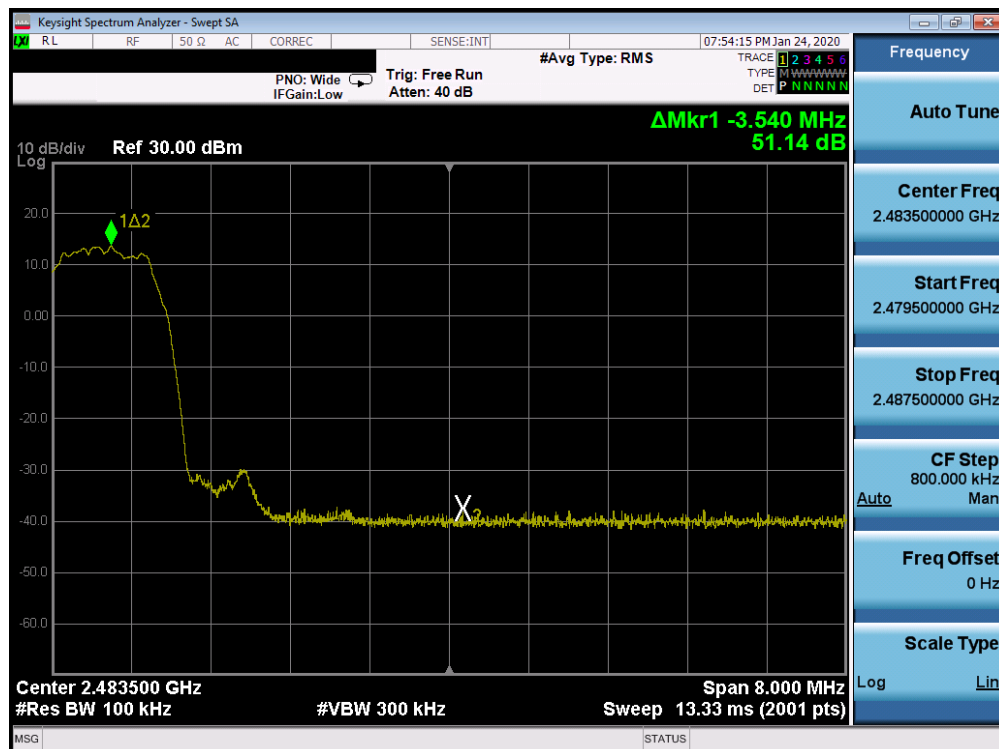


Plot 7-18. Band Edge Plot Ant 4a (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 32 of 95

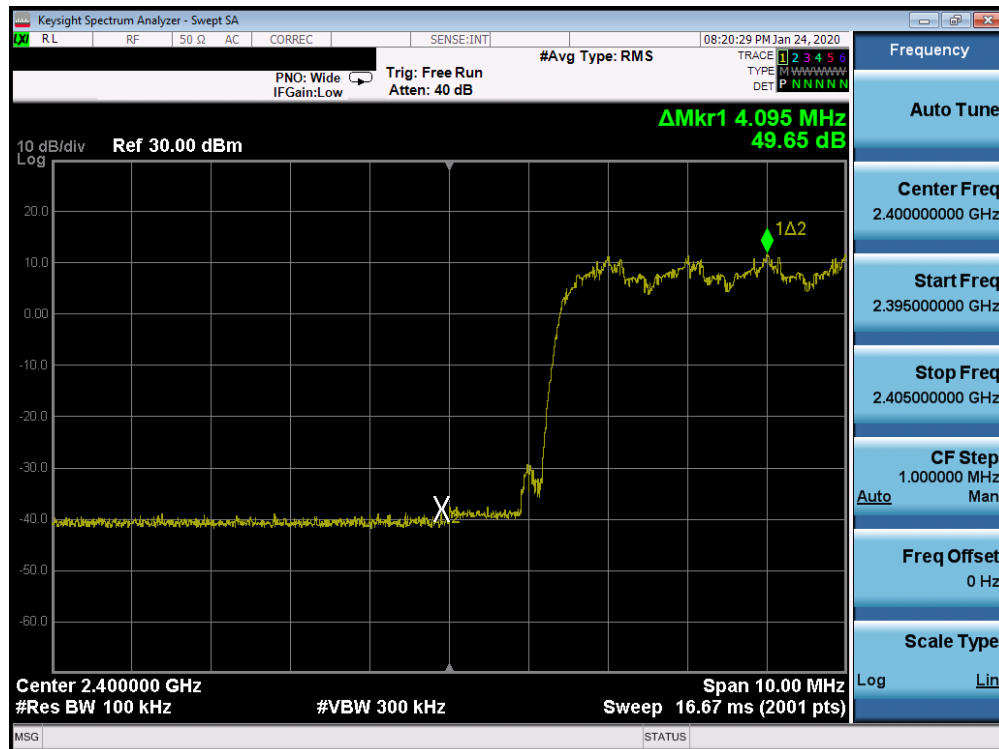


Plot 7-19. Band Edge Plot Ant 4a (Bluetooth with Hopping Enabled, 8DPSK, ePA)

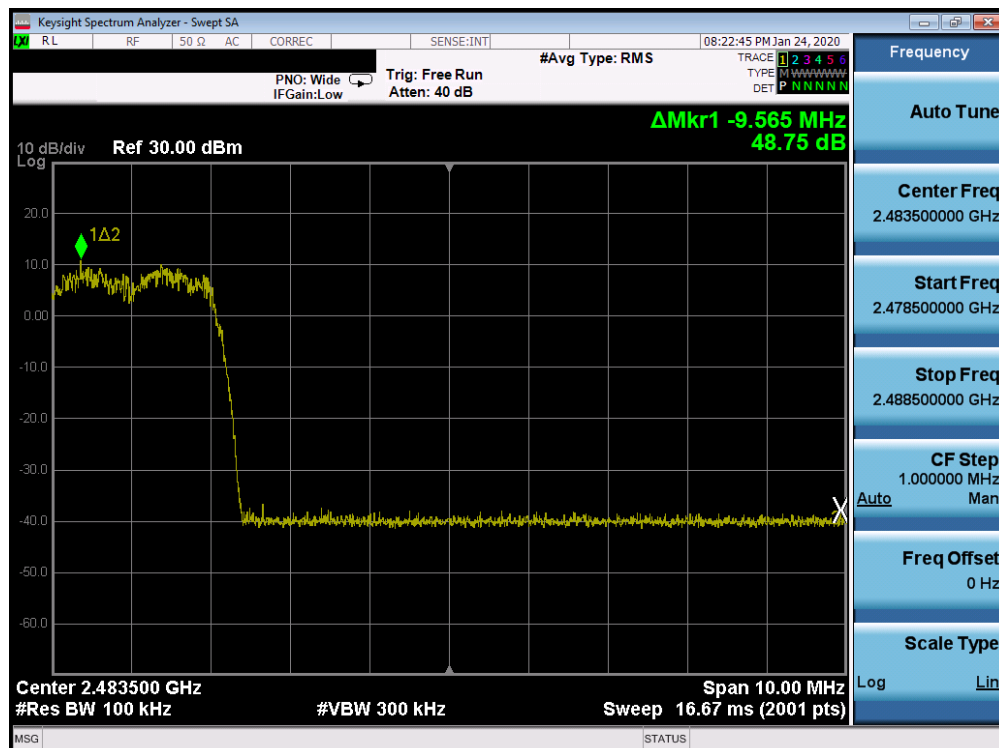


Plot 7-20. Band Edge Plot Ant 4a (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 33 of 95

Ant 2a

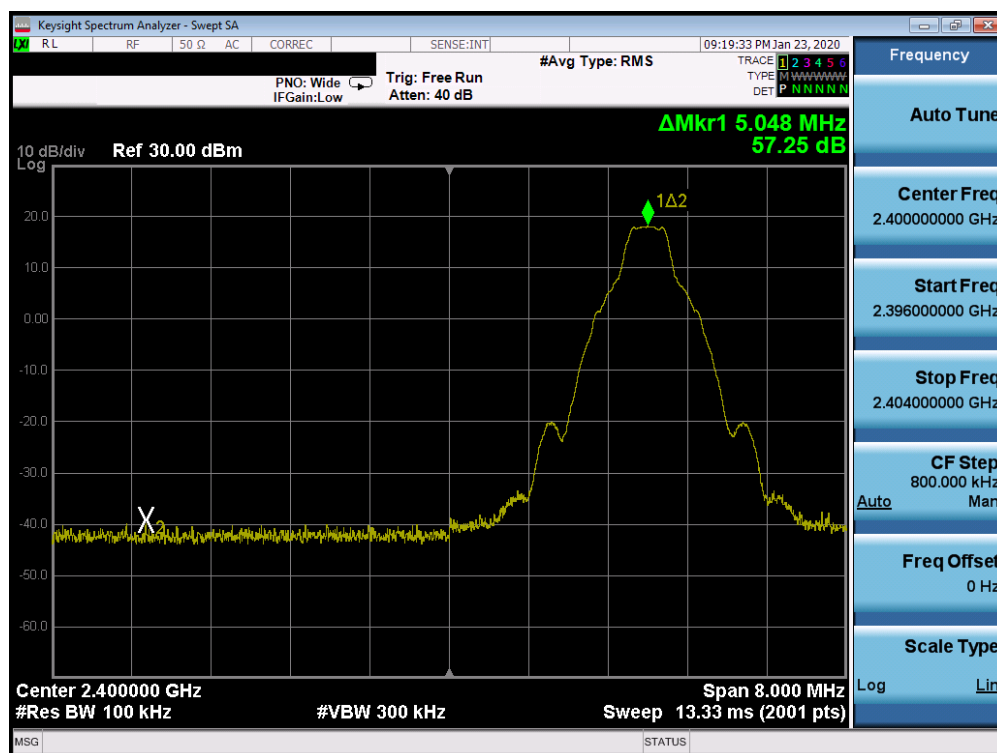


Plot 7-21. Band Edge Plot Ant 2a (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

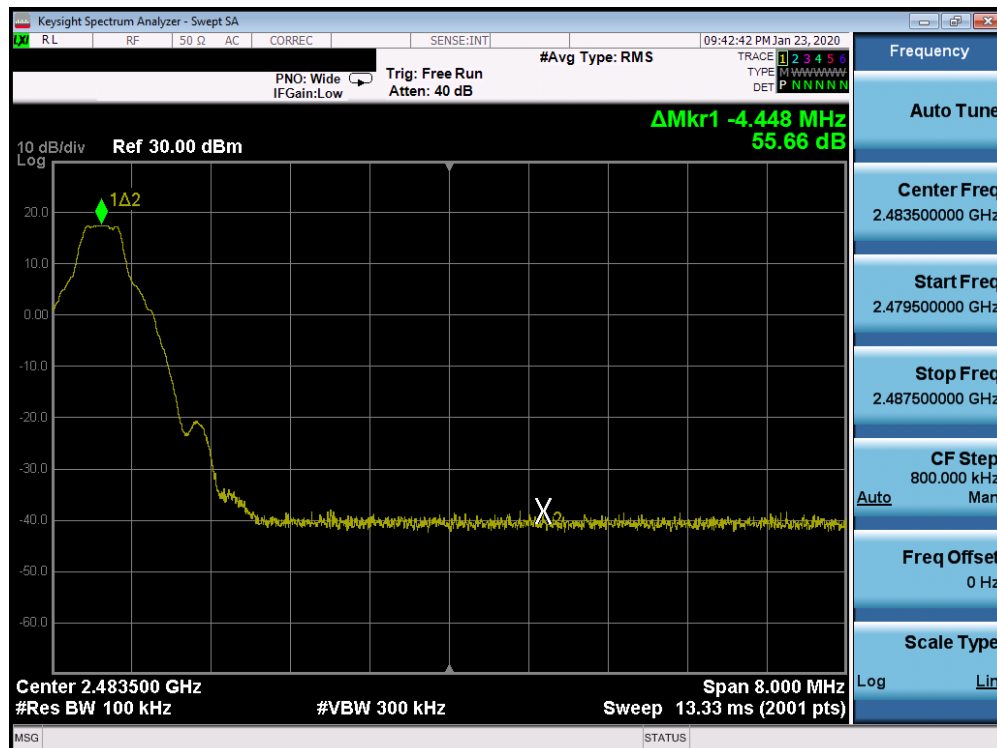


Plot 7-22. Band Edge Plot Ant 2a (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 34 of 95

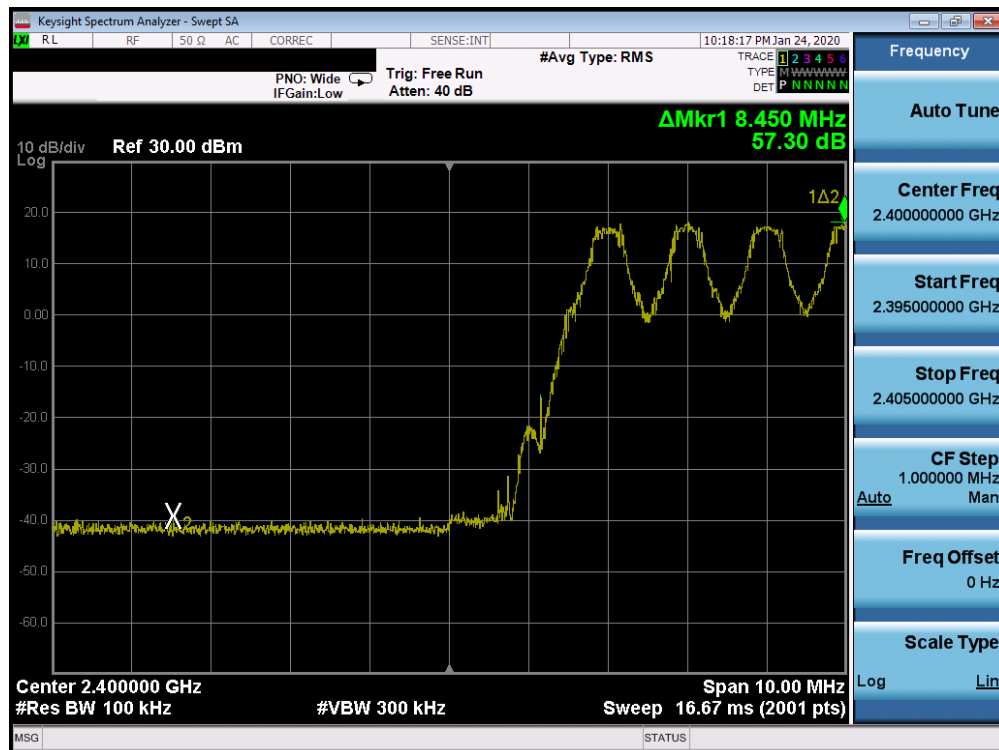


Plot 7-23. Band Edge Plot Ant 2a (Bluetooth with Hopping Enabled, GFSK, ePA)

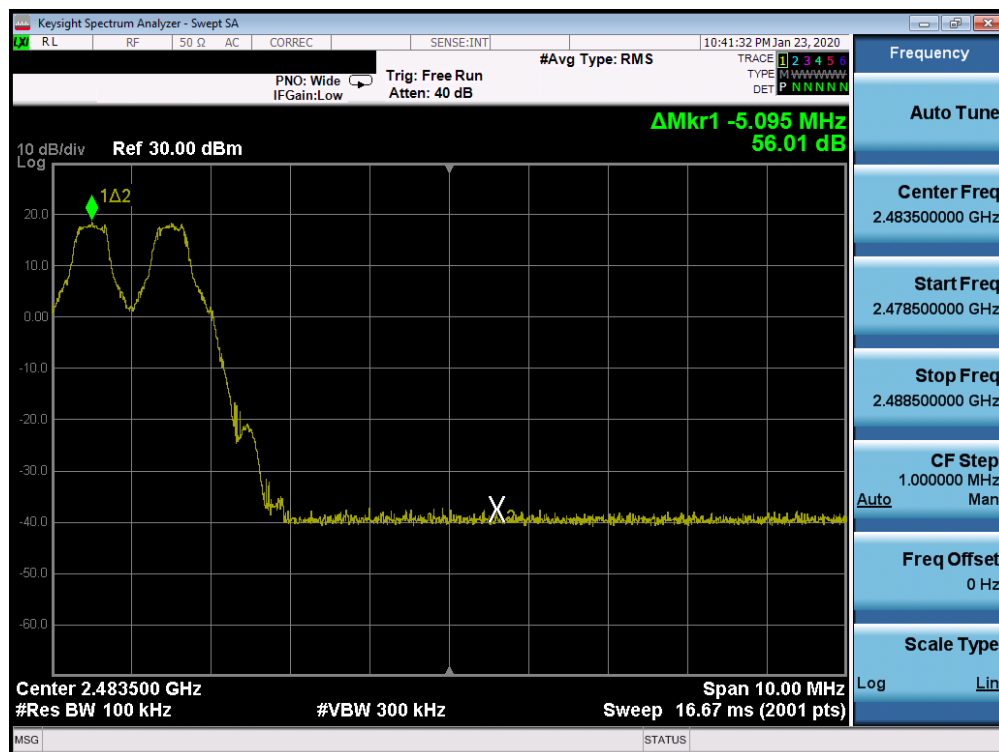


Plot 7-24. Band Edge Plot Ant 2a (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 35 of 95

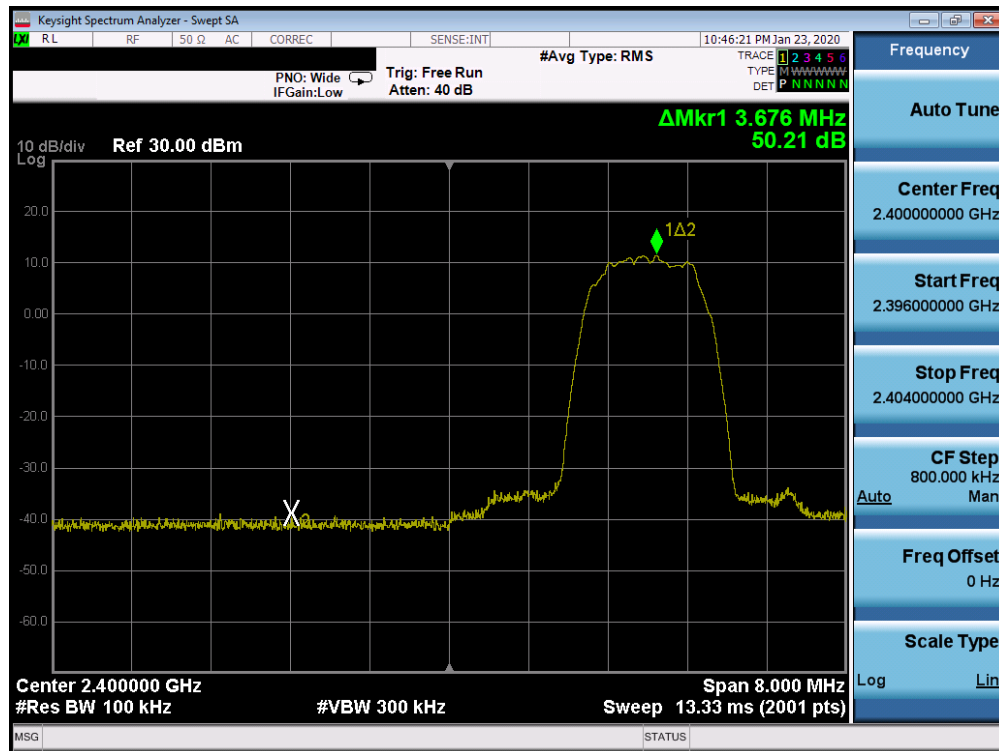


Plot 7-25. Band Edge Plot Ant 2a (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

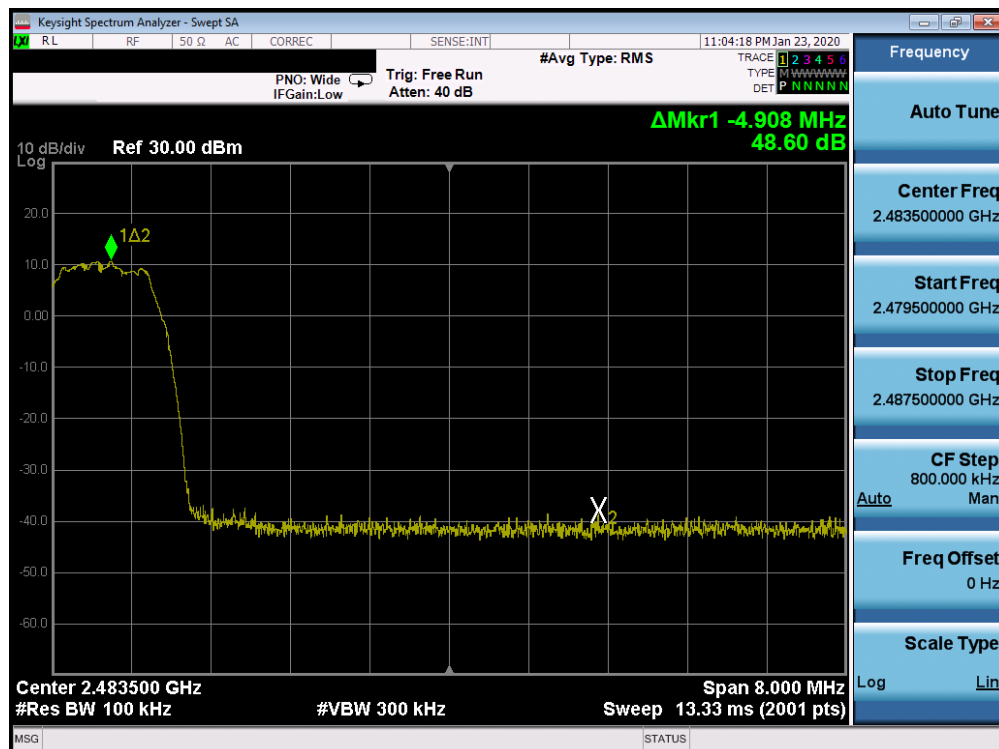


Plot 7-26. Band Edge Plot Ant 2a (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 36 of 95

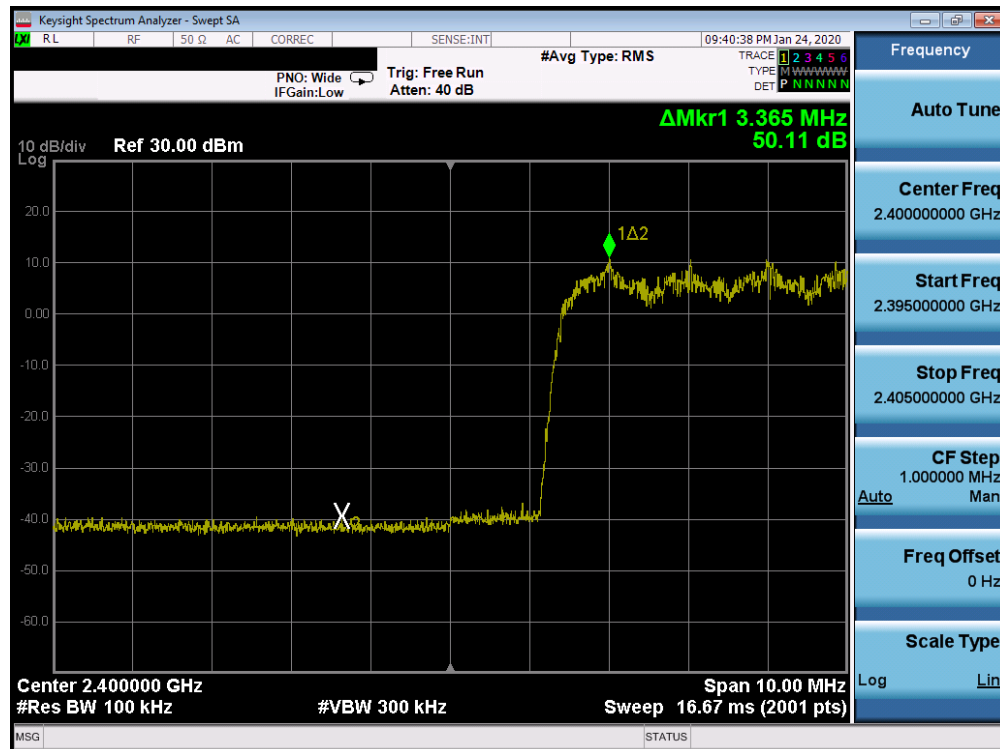

Plot 7-27. Band Edge Plot Ant 2a (Bluetooth with Hopping Enabled, 8DPSK, ePA)

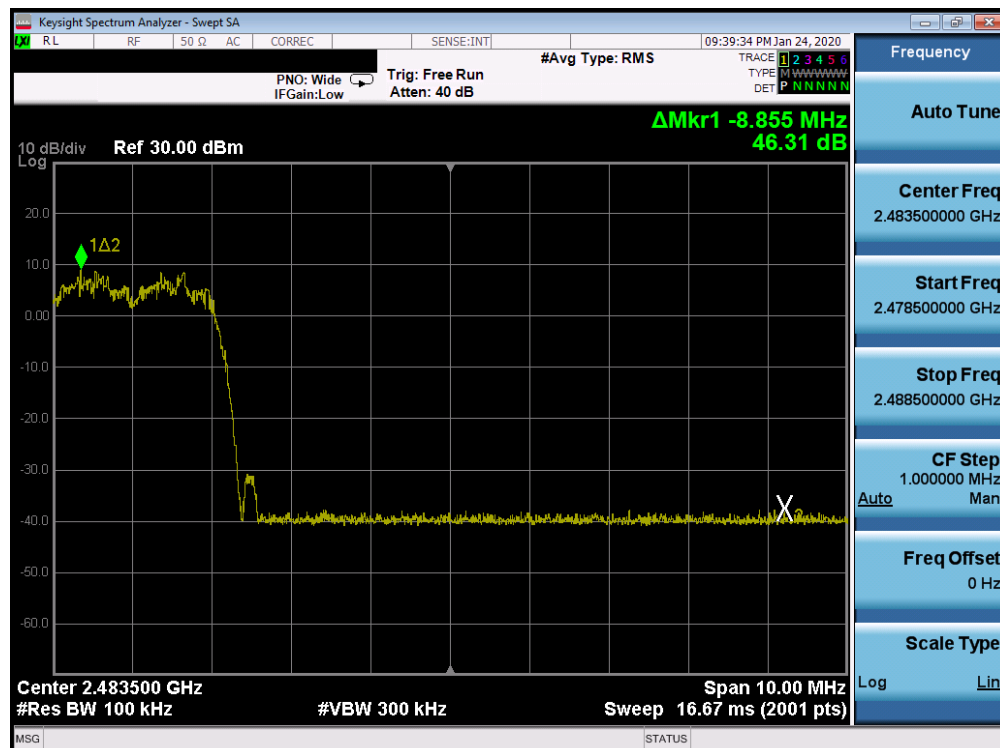

Plot 7-28. Band Edge Plot Ant 2a (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 37 of 95

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(b)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW $\geq$ RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.
2. Both power schemes were investigated and only the worst case is reported.


FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 38 of 95

Ant 4a


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]	Pass/Fail
2402	1.0	GFSK	ePA	0	0.588	Pass
2441	1.0	GFSK	ePA	39	0.589	Pass
2480	1.0	GFSK	ePA	78	0.588	Pass
2402	3.0	8DPSK	ePA	0	0.815	Pass
2441	3.0	8DPSK	ePA	39	0.815	Pass
2480	3.0	8DPSK	ePA	78	0.815	Pass

Table 7-10. Minimum Channel Separation Ant 4a

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 39 of 95

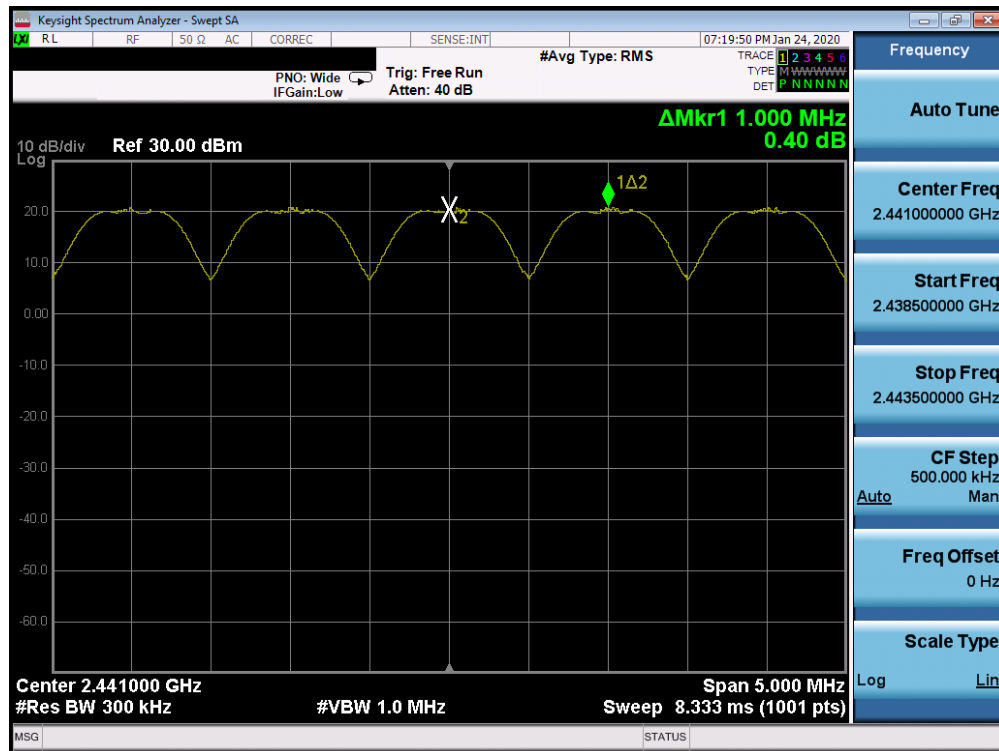

Plot 7-29. Channel Spacing Plot Ant 4a (Bluetooth, GFSK, ePA)

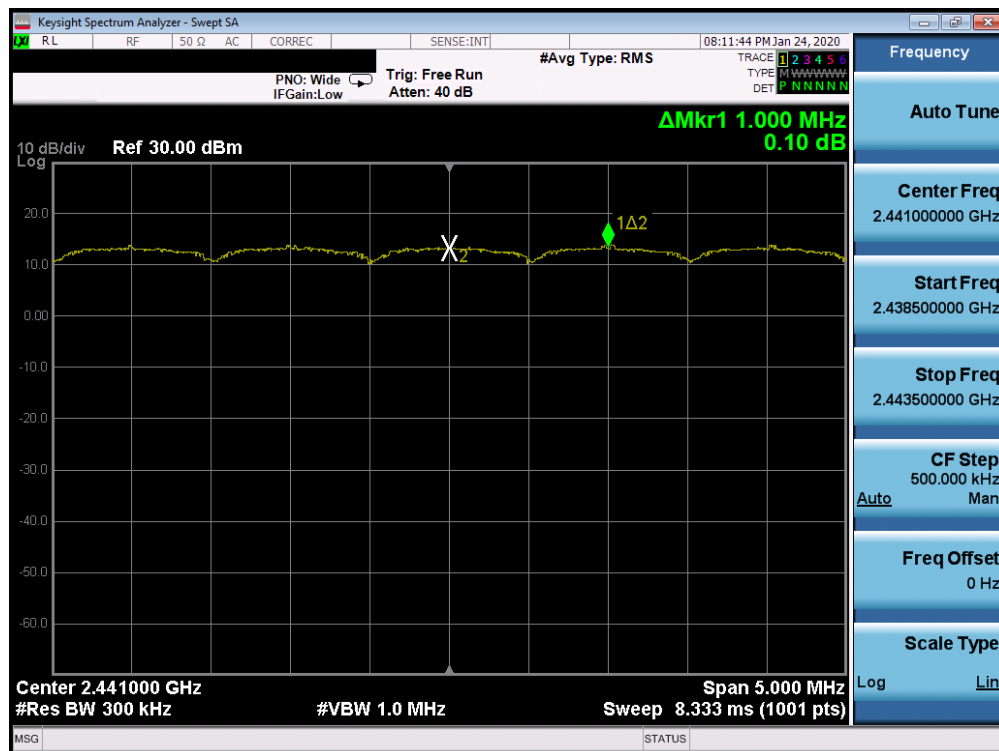

Plot 7-30. Channel Spacing Plot Ant 4a (Bluetooth, 8DPSK, ePA)


FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 40 of 95

Ant 2a


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]	Pass/Fail
2402	1.0	GFSK	ePA	0	0.590	Pass
2441	1.0	GFSK	ePA	39	0.588	Pass
2480	1.0	GFSK	ePA	78	0.589	Pass
2402	3.0	8DPSK	ePA	0	0.816	Pass
2441	3.0	8DPSK	ePA	39	0.817	Pass
2480	3.0	8DPSK	ePA	78	0.816	Pass

Table 7-11. Minimum Channel Separation Ant 2a

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 41 of 95

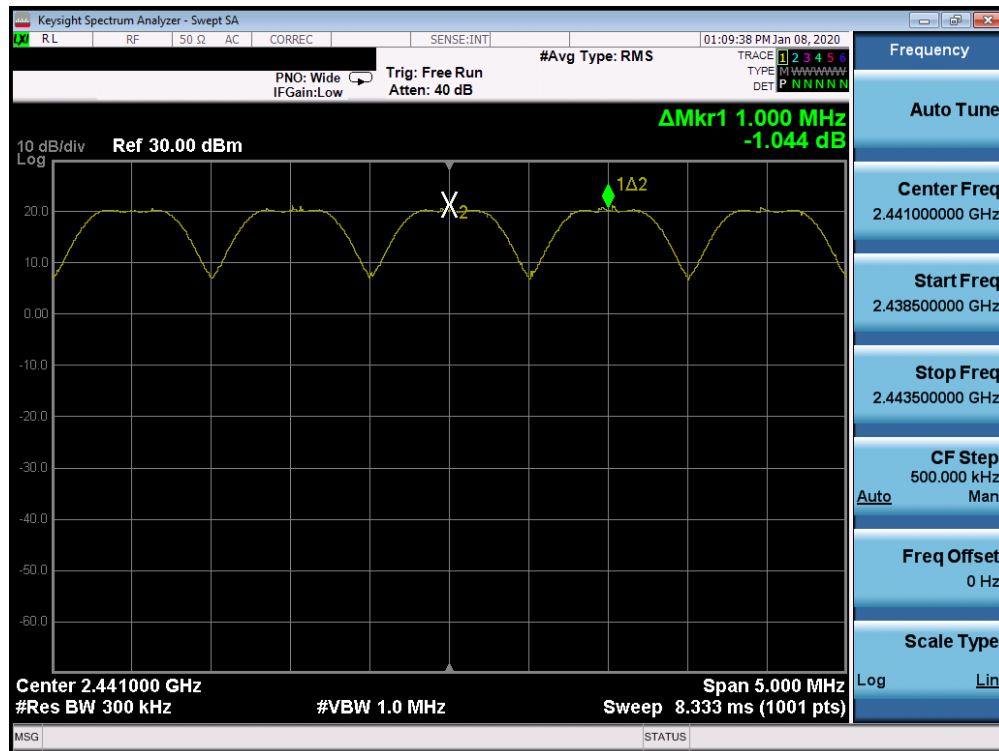

Plot 7-31. Channel Spacing Plot Ant 2a (Bluetooth, GFSK, ePA)

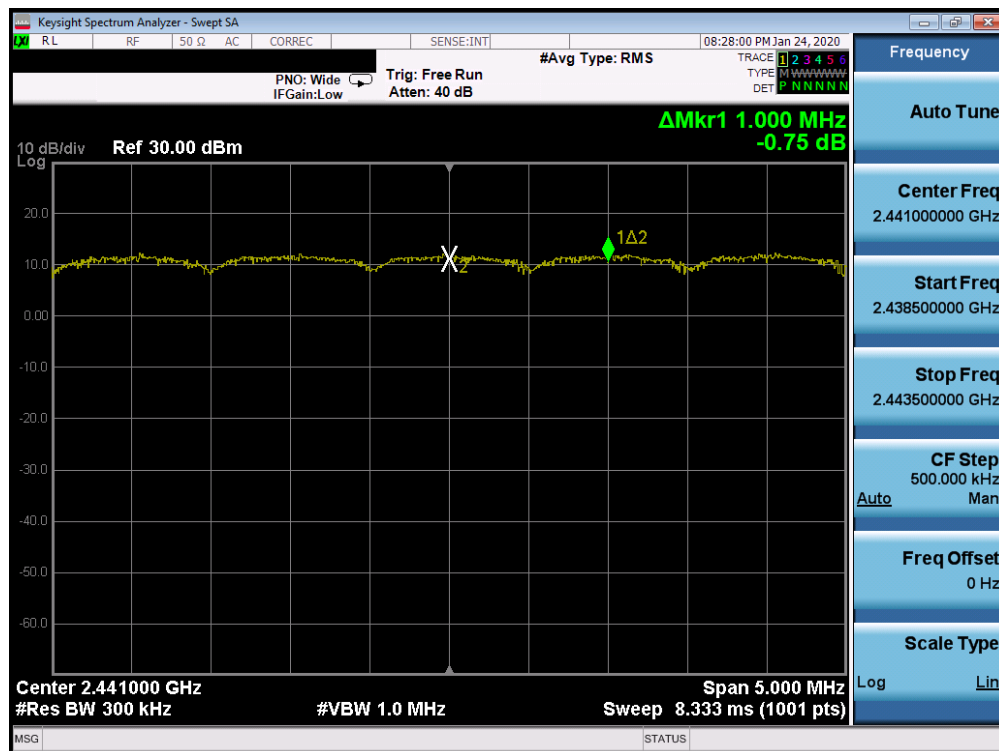

Plot 7-32. Channel Spacing Plot Ant 2a (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 42 of 95

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(d)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. ***The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW $\leq$ channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. Test Instrument & Measurement Setup

Test Notes


Both power schemes were investigated and only the worst case is reported.

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 43 of 95

Ant 4a

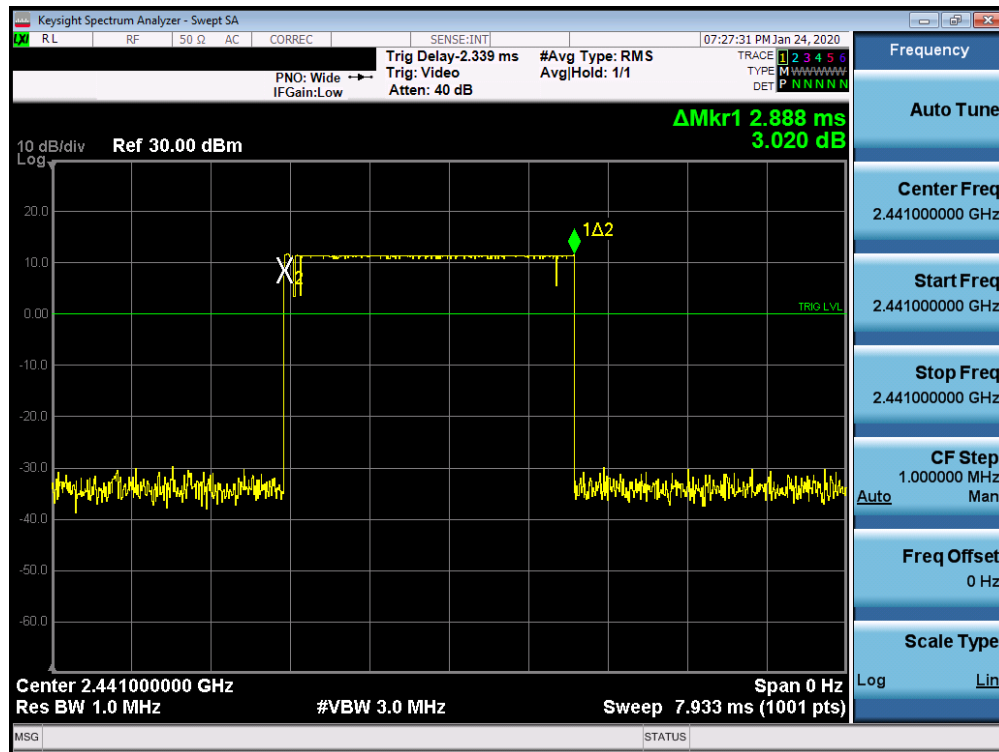


Plot 7-33. Time of Occupancy Plot Ant 4a (Bluetooth, GFSK, ePA)

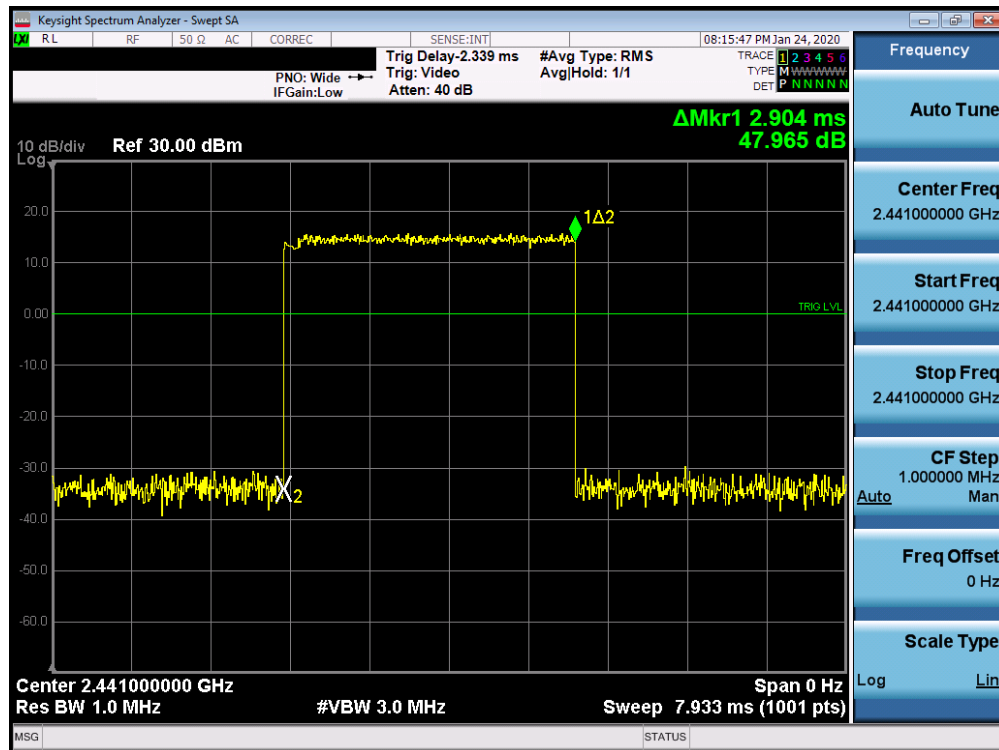


Plot 7-34. Time of Occupancy Plot Ant 4a (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 44 of 95

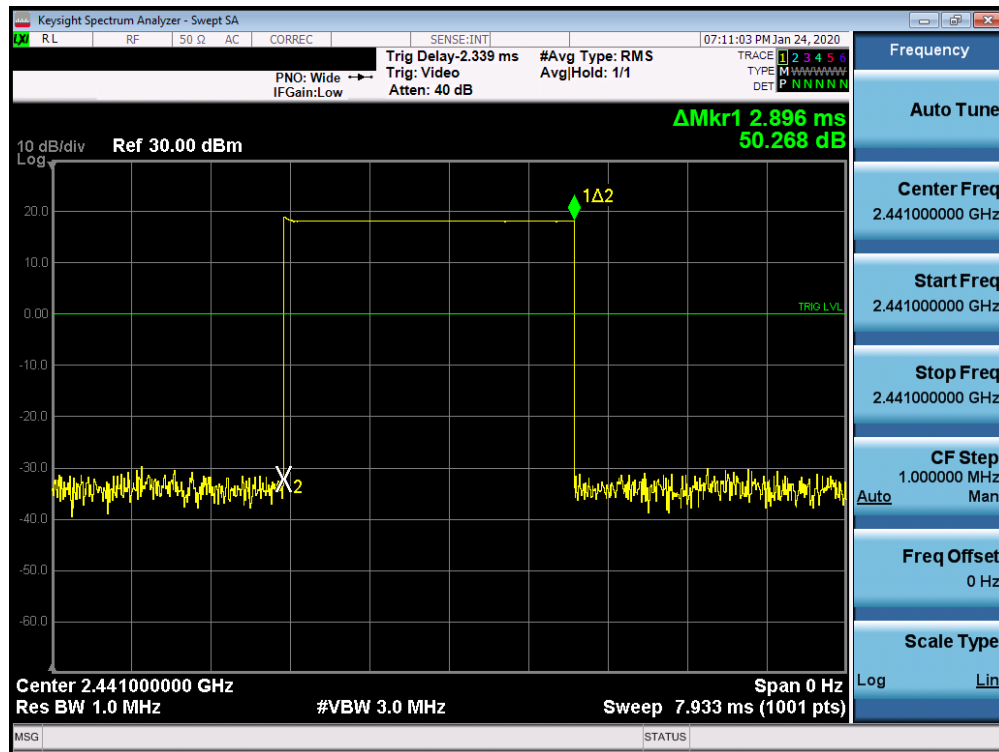

Plot 7-35. Time of Occupancy Plot Ant 2a (Bluetooth, GFSK, ePA)

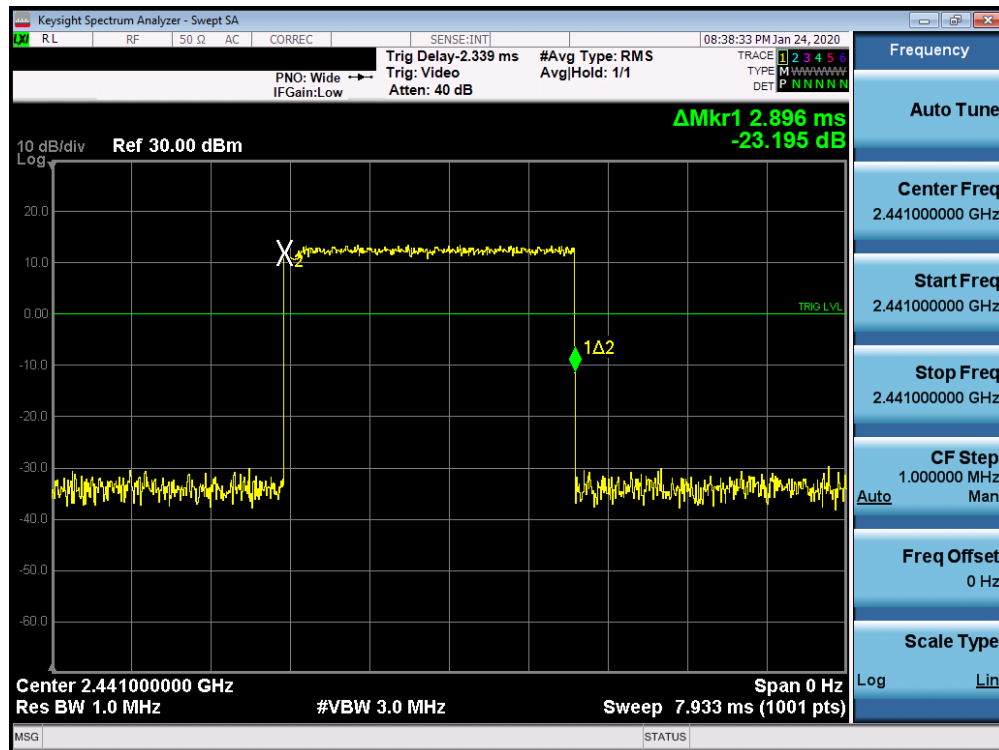

Plot 7-36. Time of Occupancy Plot Ant 2a (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 45 of 95

Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- o $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- o Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- o $266.67 \text{ hops/second} / 79 \text{ channels} = 3.38 \text{ hops/second}$ (# of hops/second on one channel)
- o $3.38 \text{ hops/second/channel} \times 31.6 \text{ seconds} = 106.67 \text{ hops}$ (# hops over a 31.6 second period)
- o $106.67 \text{ hops} \times 2.904 \text{ ms/channel} = 309.76 \text{ ms}$ (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- o $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- o Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- o $133.3 \text{ hops/s} / 20 \text{ channels} = 6.67 \text{ hops/second}$ (# of hops/second on one channel)
- o $6.67 \text{ hops/s} / \text{channel} \times 8 \text{ seconds} = 53.34 \text{ hops}$ (# hops over a 8 second period)
- o $53.34 \text{ hops} \times 2.904 \text{ ms/channel} = 154.89 \text{ ms}$ (worst case dwell time for one channel in AFH mode)

The measured worst case dwell time is below the limit of 0.4s.

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 46 of 95

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(d)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-6. Test Instrument & Measurement Setup

Test Notes


1. The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.
2. Both power schemes were investigated and only the worst case is reported.

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 47 of 95

Ant 4a

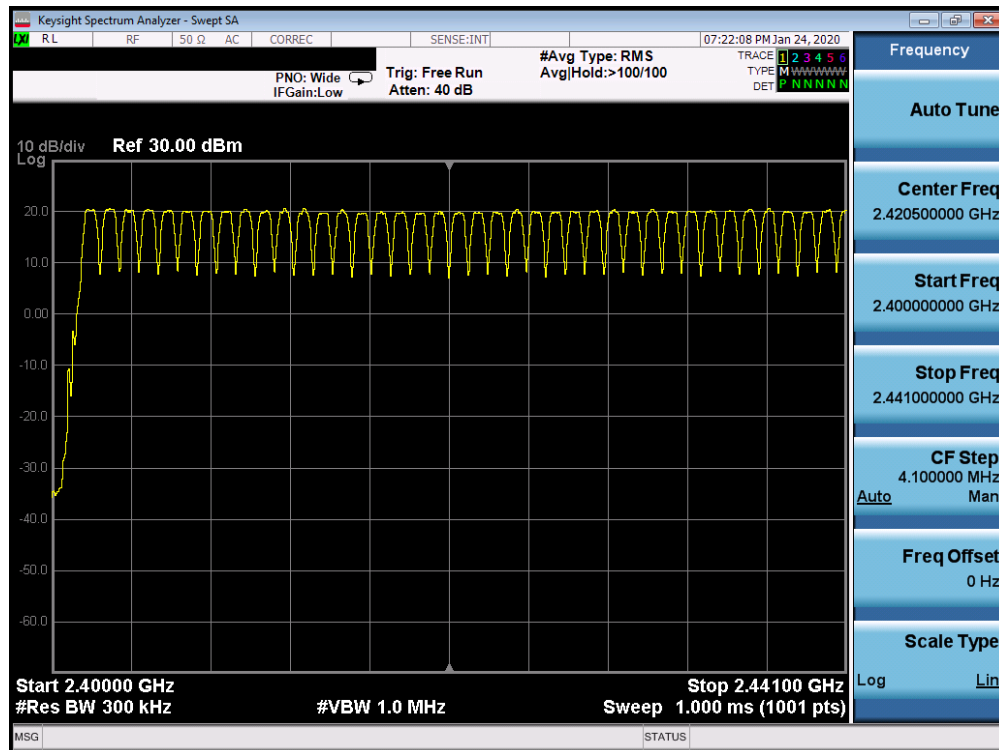


Plot 7-37. Low End Spectrum Channel Hopping Plot Ant 4a (Bluetooth, GFSK, ePA)

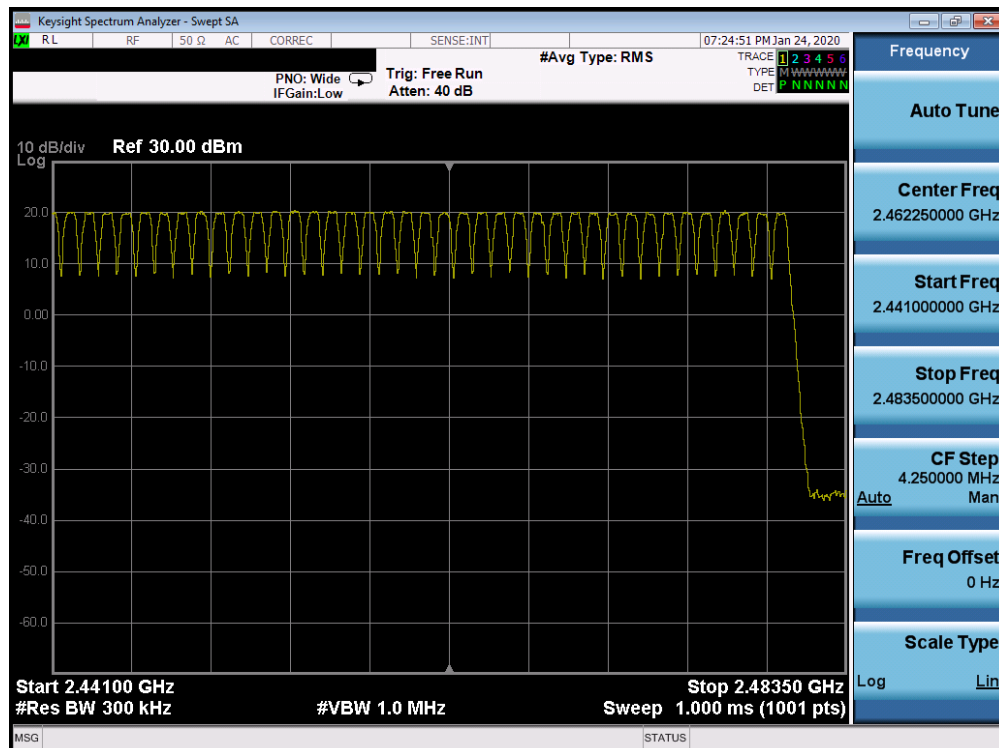


Plot 7-38. High End Spectrum Channel Hopping Plot Ant 4a (Bluetooth, GFSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 48 of 95

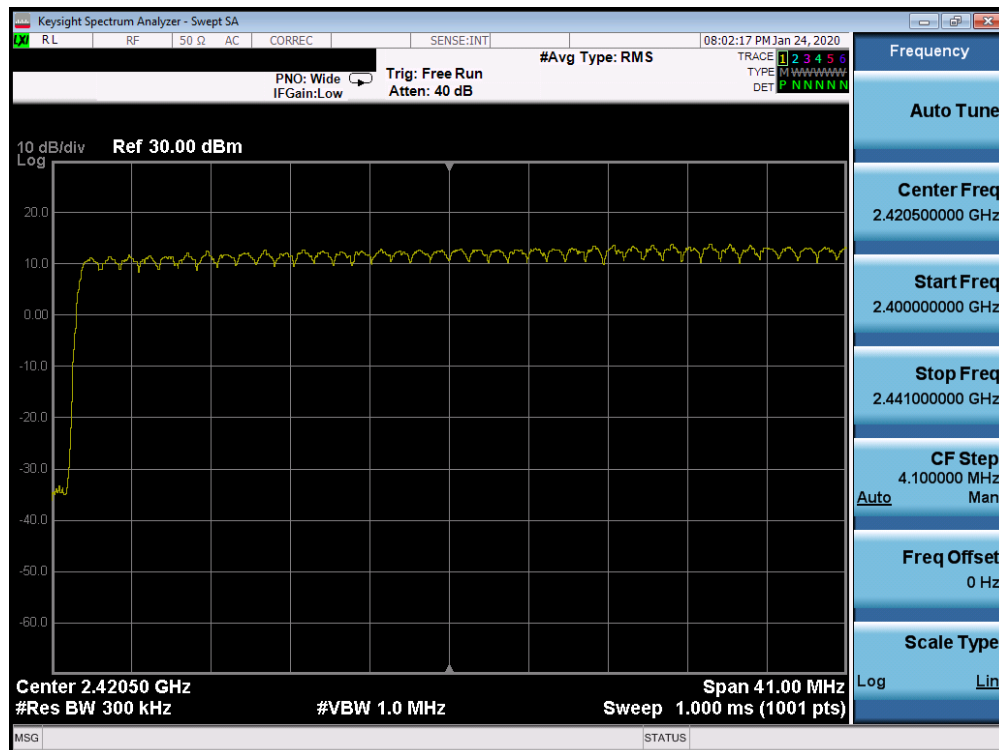


Plot 7-39. Low End Spectrum Channel Hopping Plot Ant 4a (Bluetooth, 8DPSK, ePA)

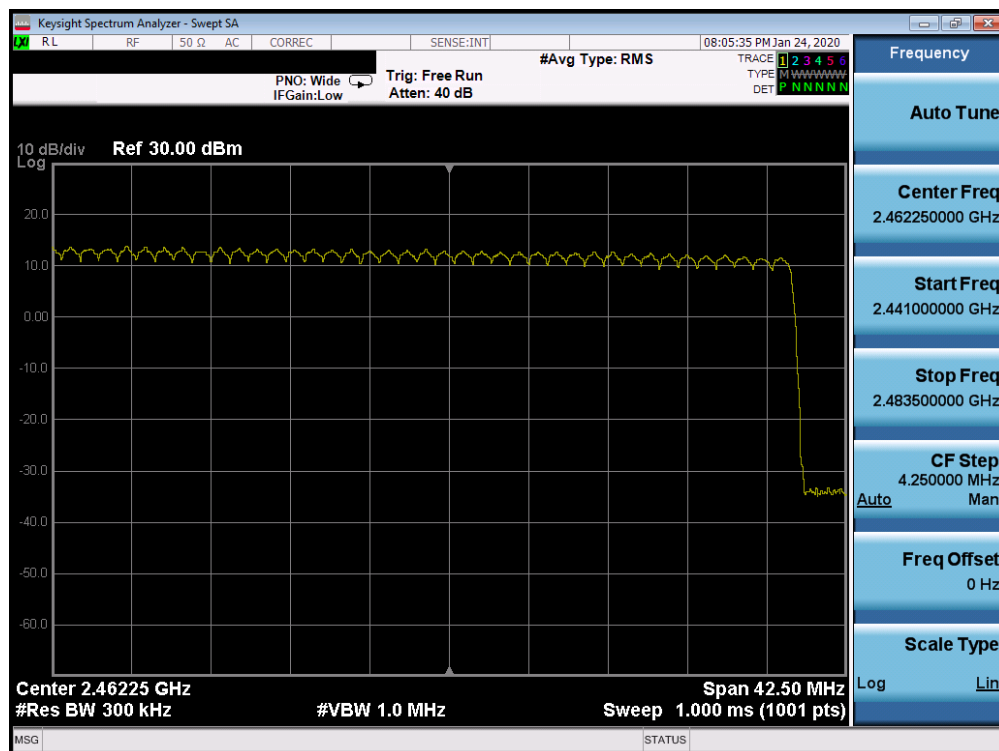


Plot 7-40. High End Spectrum Channel Hopping Plot Ant 4a (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 49 of 95

Ant 2a

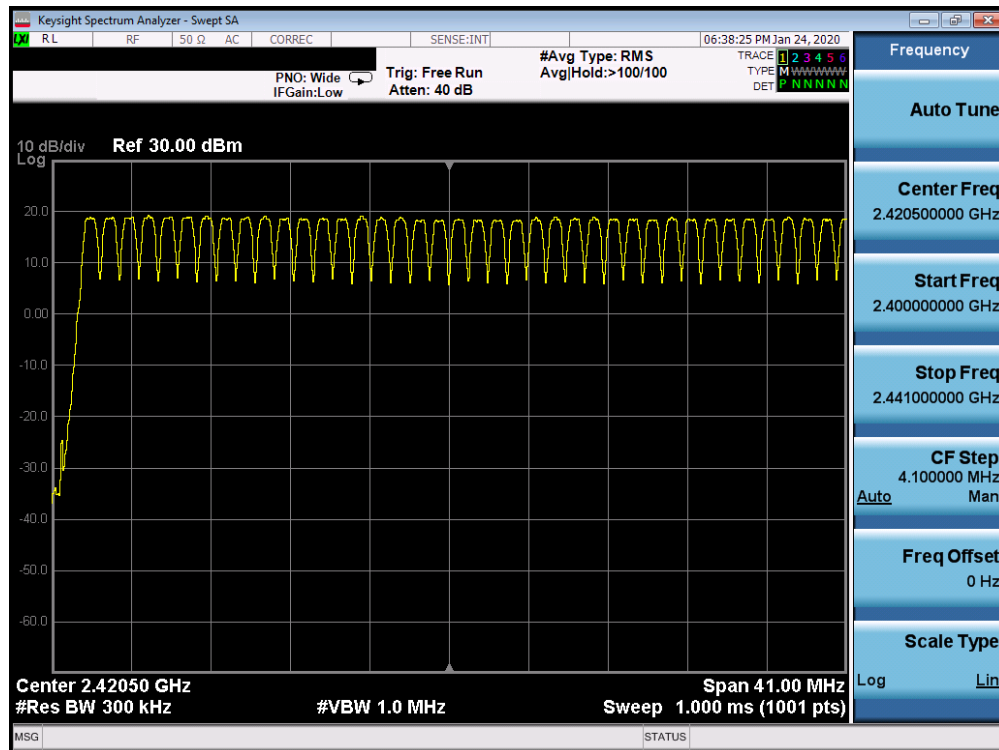


Plot 7-41. Low End Spectrum Channel Hopping Plot Ant 2a (Bluetooth, GFSK, ePA)

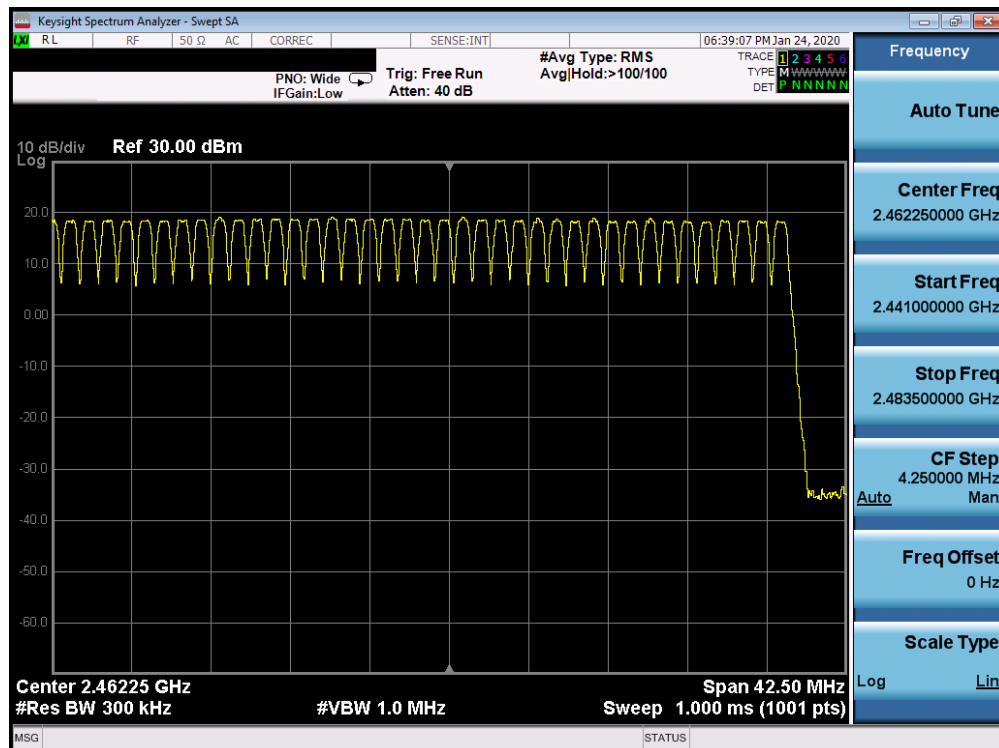


Plot 7-42. High End Spectrum Channel Hopping Plot Ant 2a (Bluetooth, GFSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 50 of 95

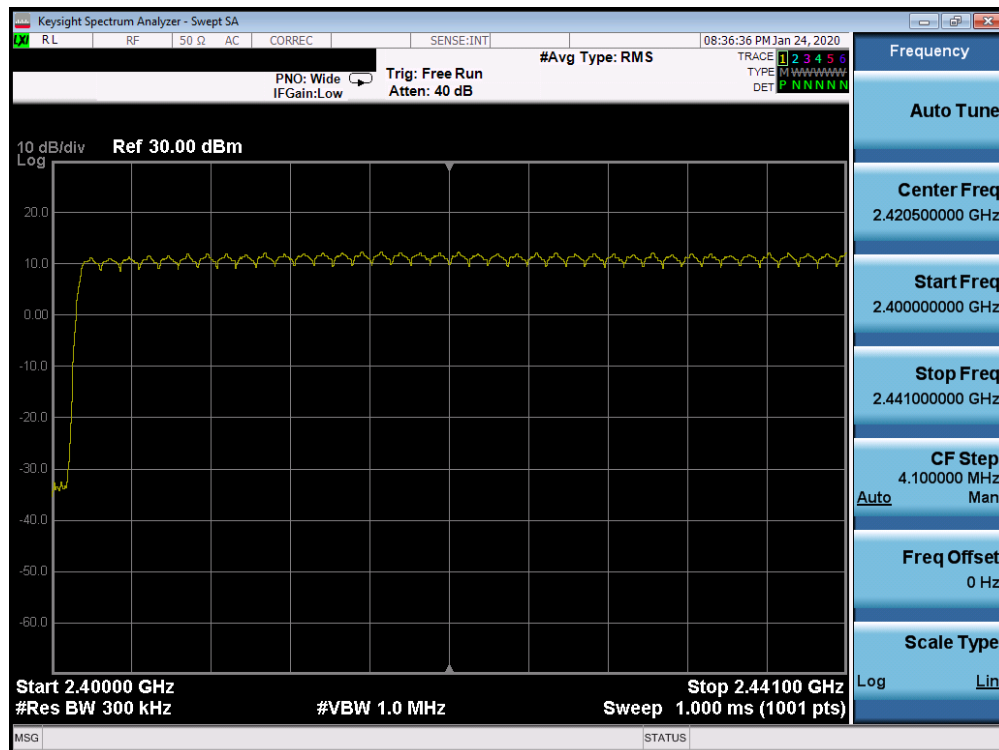

Plot 7-43. Low End Spectrum Channel Hopping Plot Ant 2a (Bluetooth, 8DPSK, ePA)

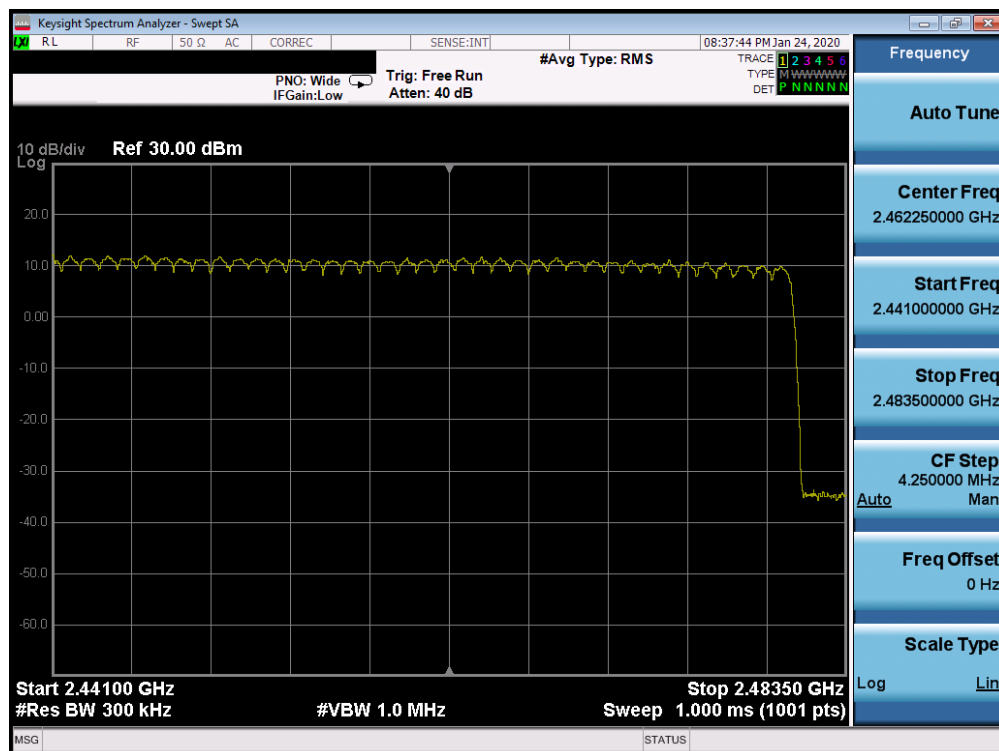

Plot 7-44. High End Spectrum Channel Hopping Plot Ant 2a (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 51 of 95

7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10th harmonic of the fundamental transmit frequency. ***The maximum permissible out-of-band emission level is 20 dBc.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-7. Test Instrument & Measurement Setup

Test Notes


1. Out-of-band conducted spurious emissions were investigated for all data rates and the worst case emissions were found with the EUT transmitting at 1Mbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
2. Both power schemes were investigated and only the worst case is reported.

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 52 of 95

Ant 4a

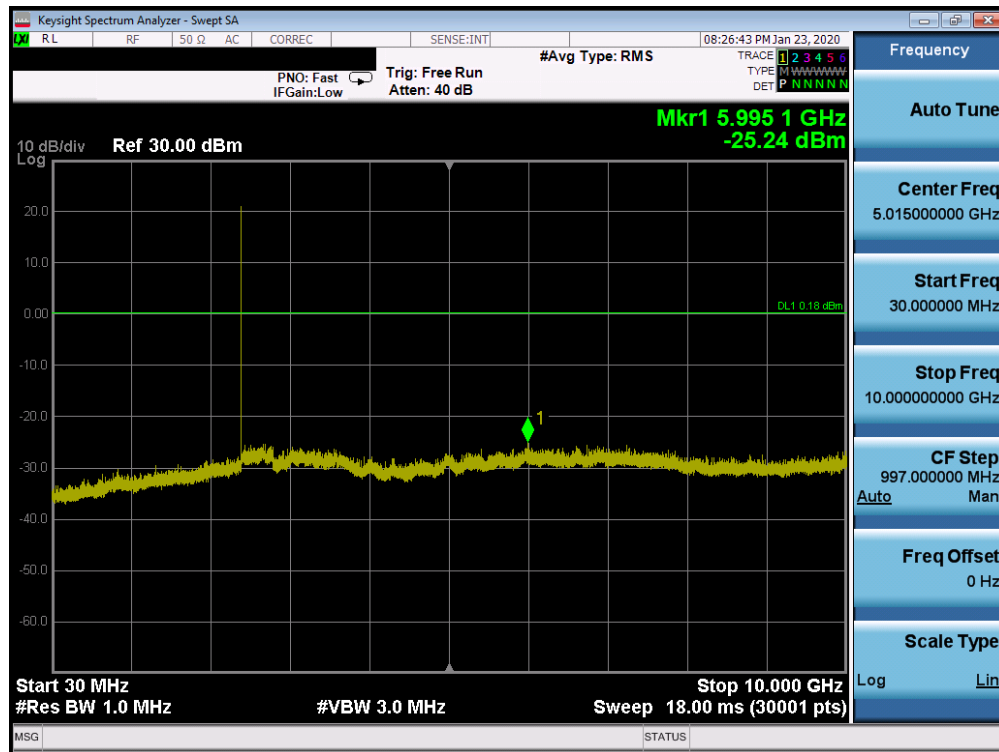


Plot 7-45. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 0)

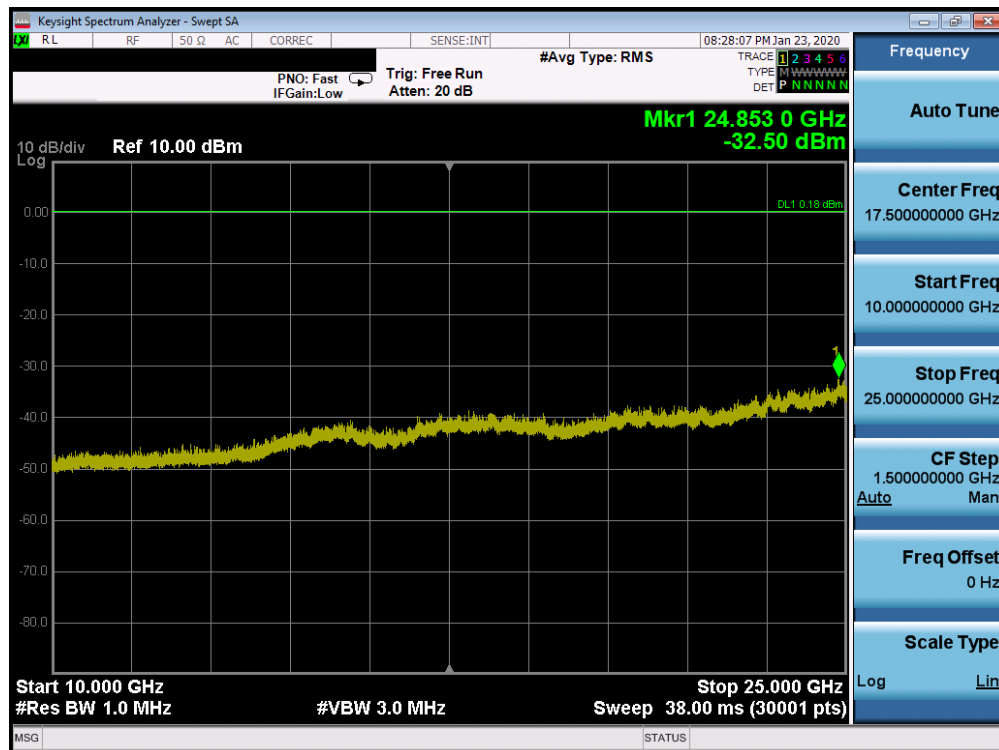


Plot 7-46. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 53 of 95

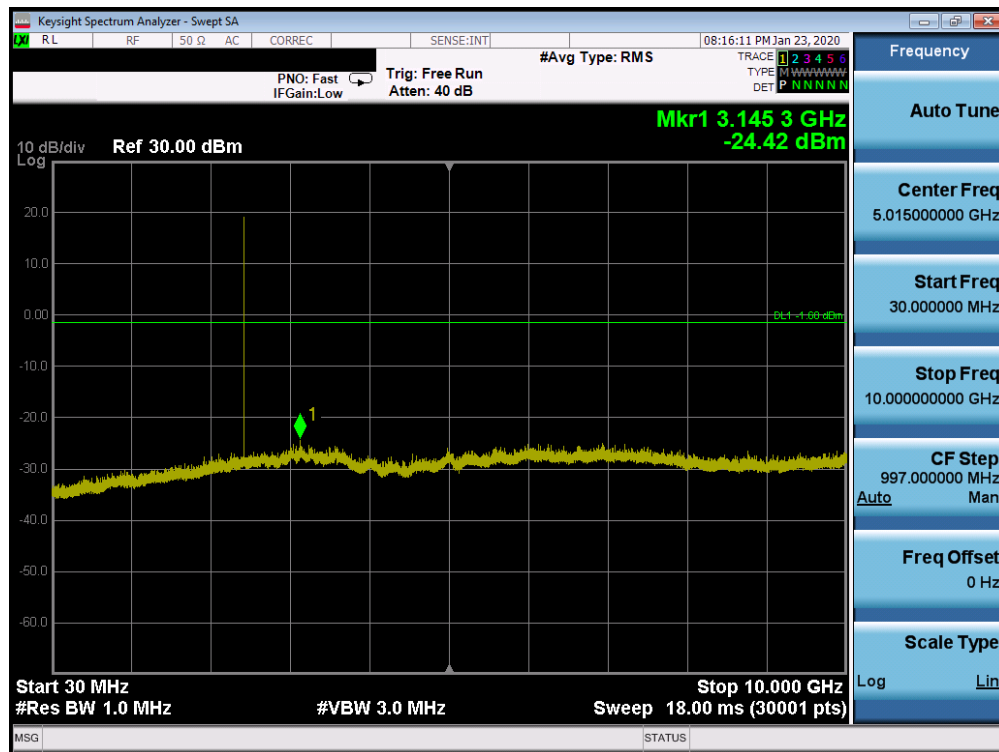


Plot 7-47. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 39)

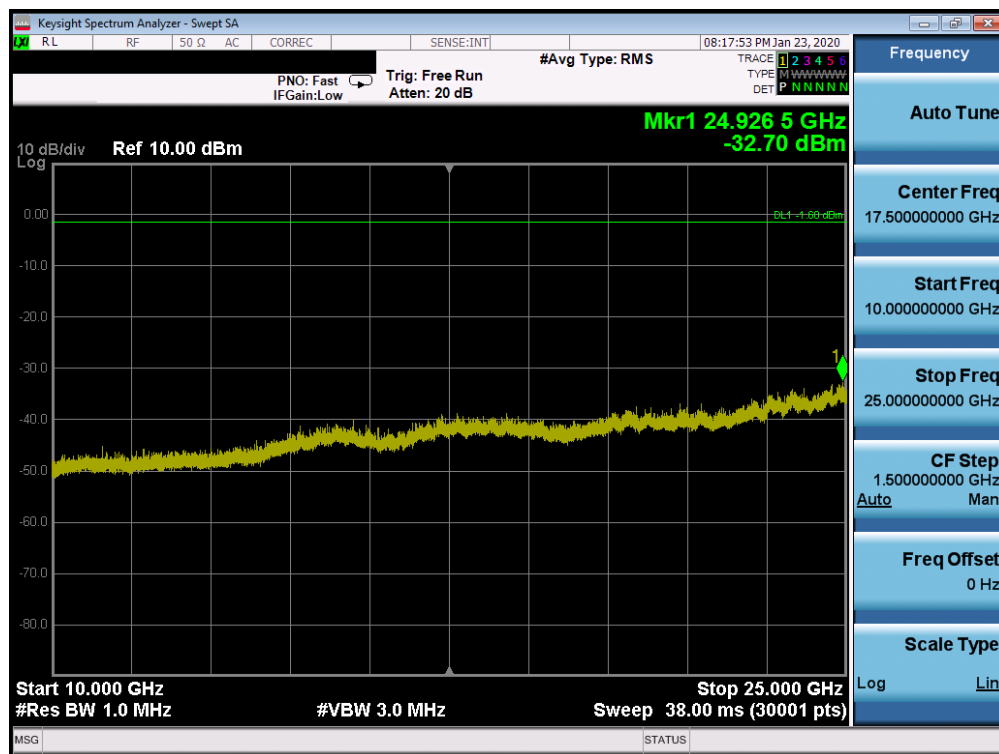


Plot 7-48. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 54 of 95

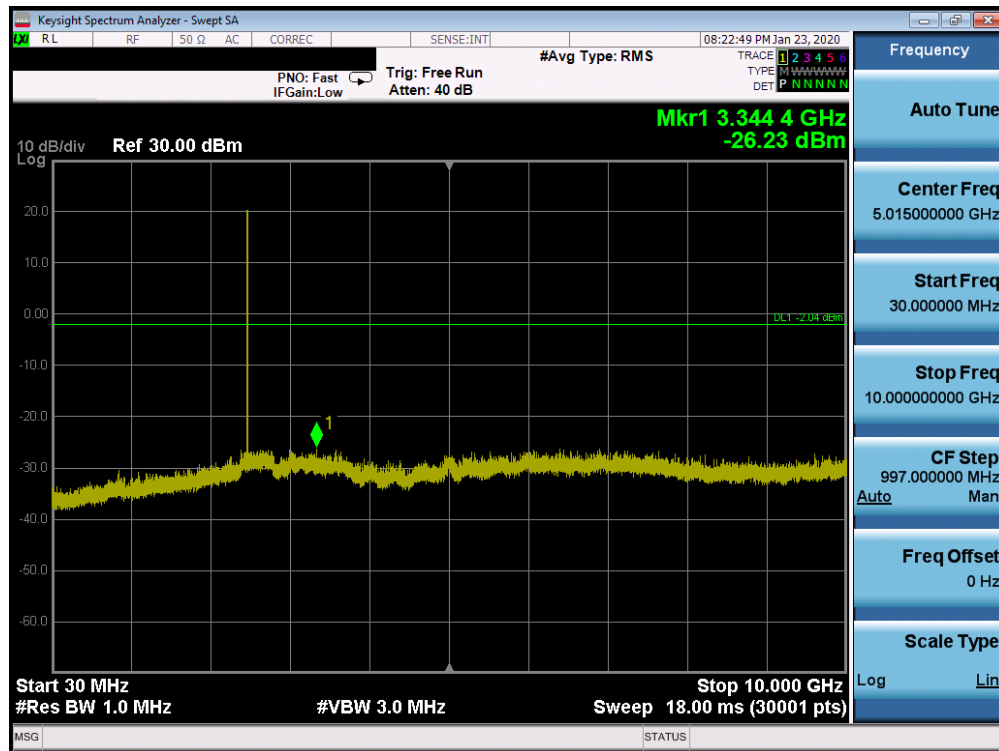


Plot 7-49. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 78)

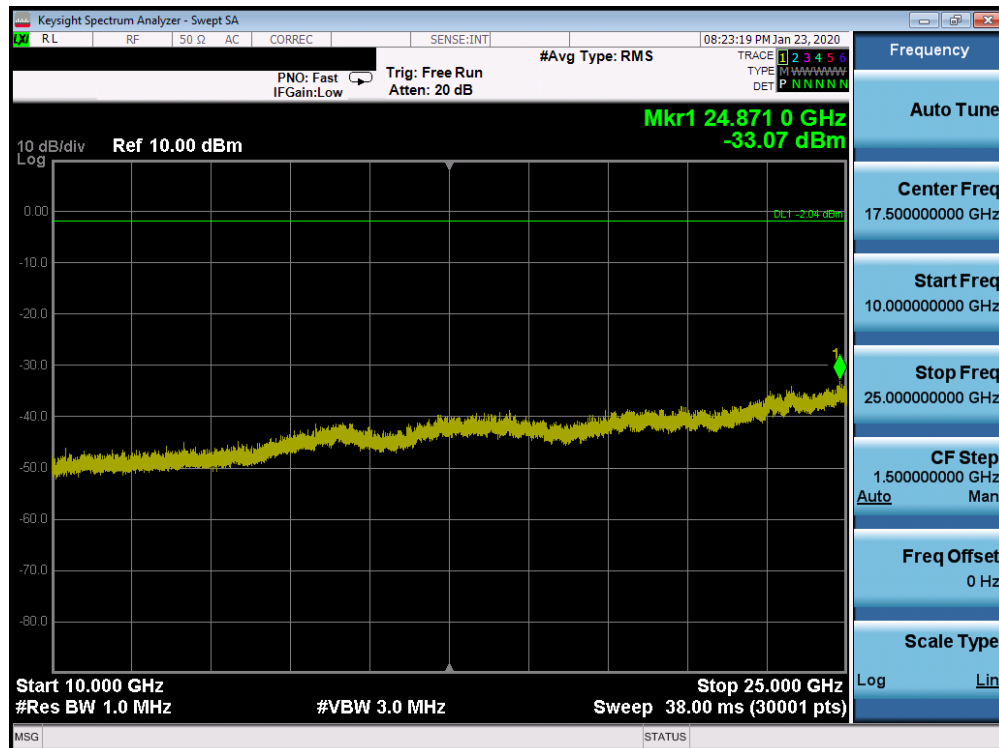


Plot 7-50. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 55 of 95

Ant 2a

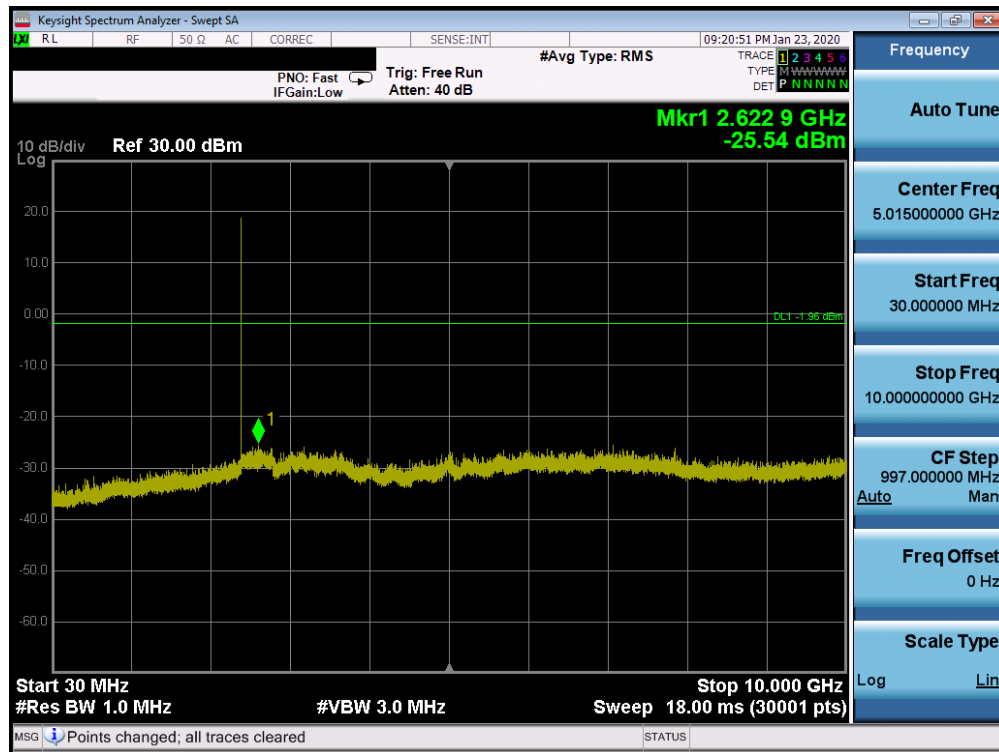


Plot 7-51. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 0)

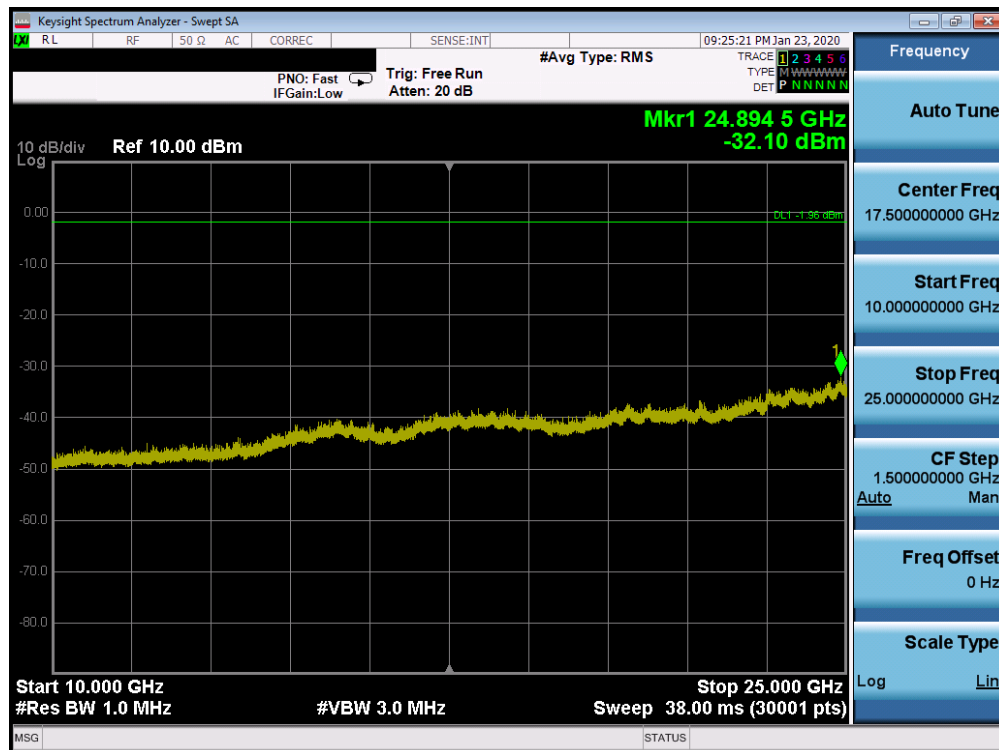


Plot 7-52. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 56 of 95

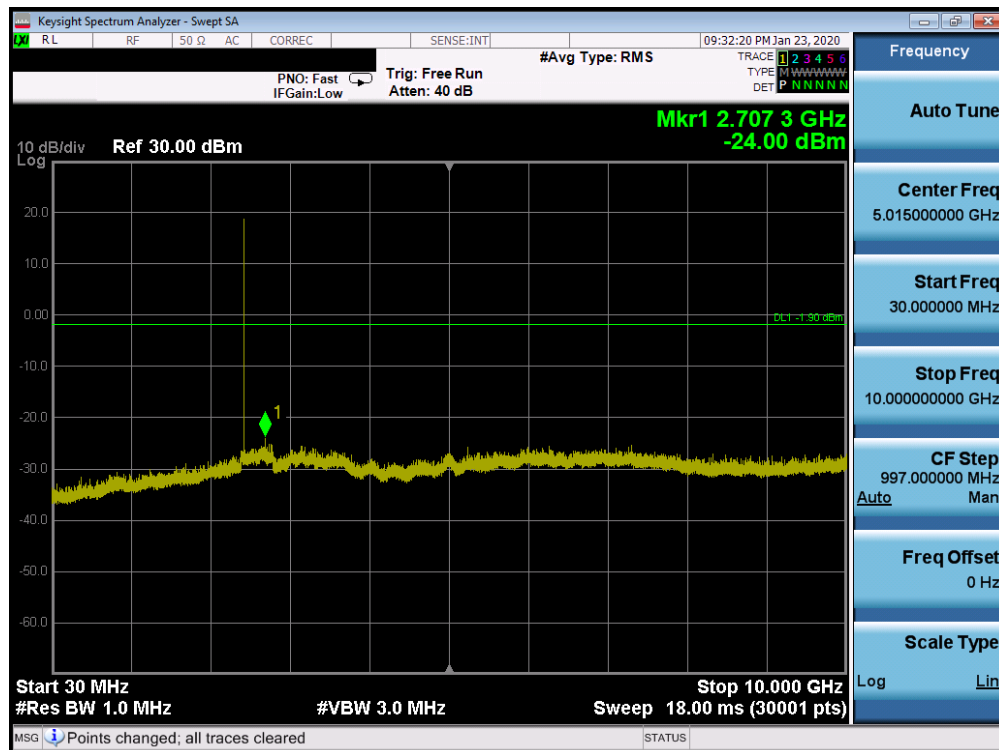


Plot 7-53. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 39)

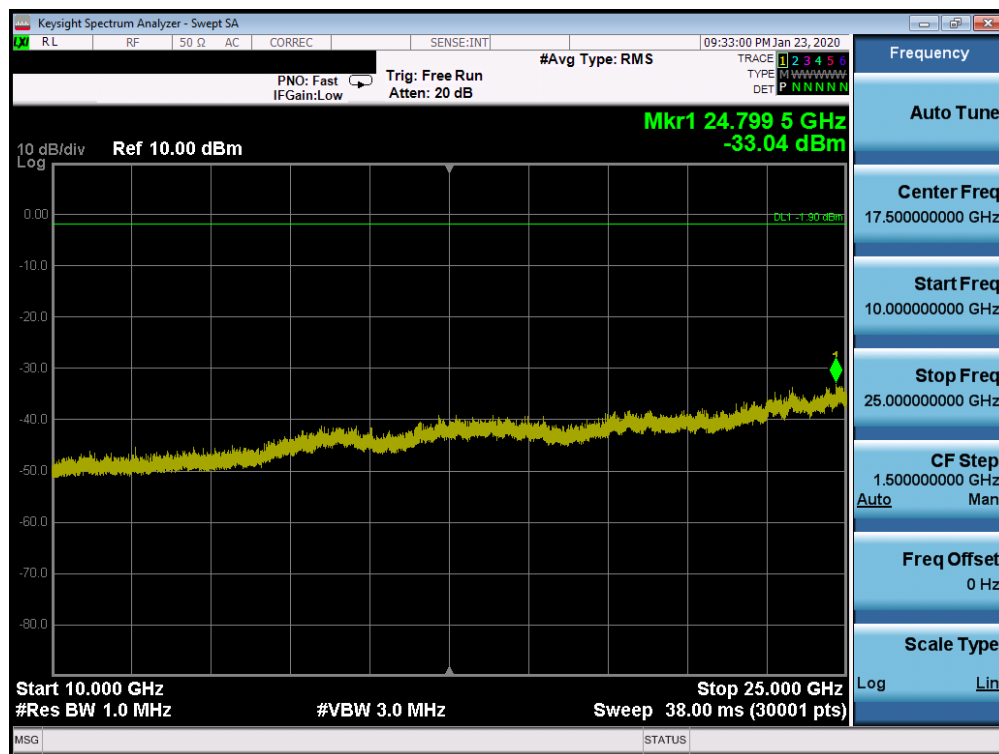


Plot 7-54. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 57 of 95

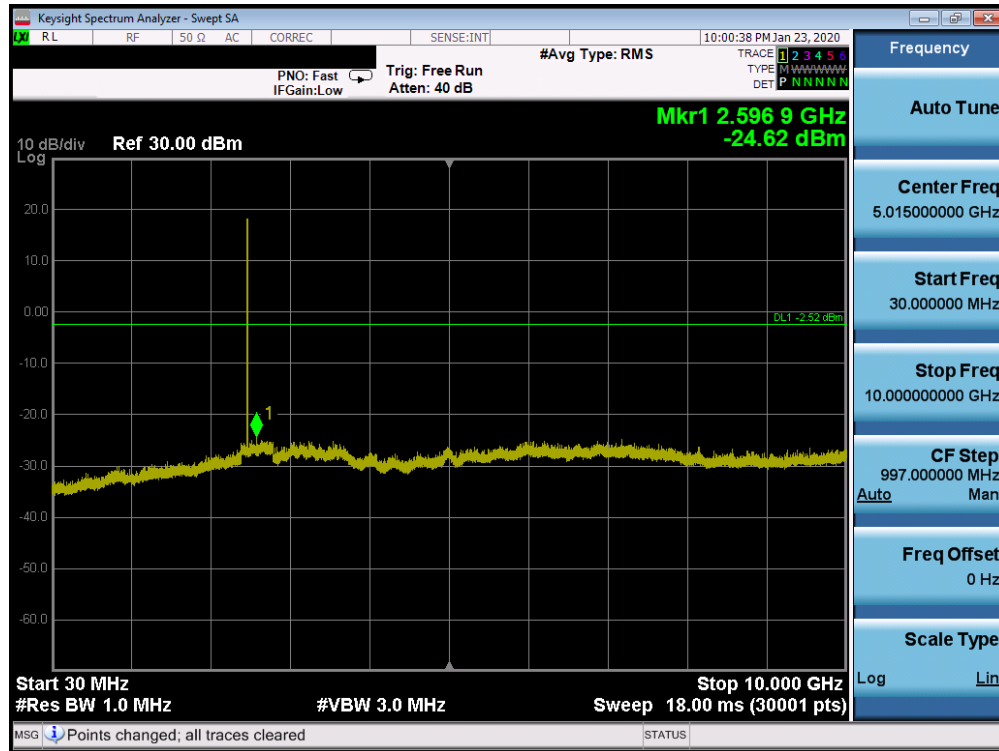

Plot 7-55. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 78)

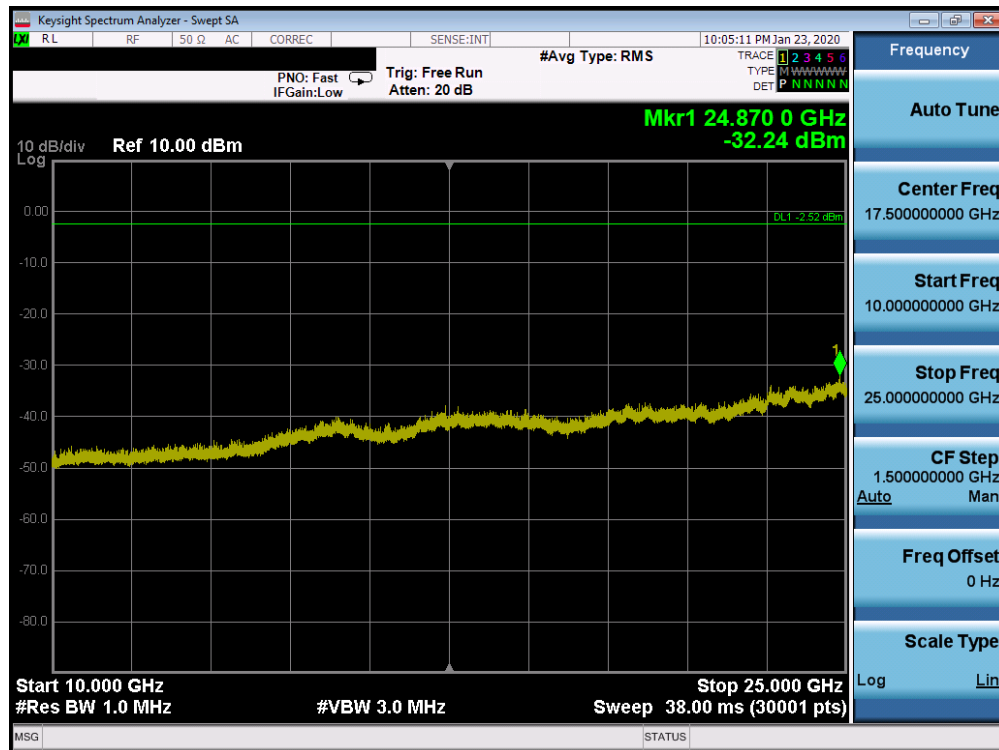

Plot 7-56. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 58 of 95

7.9 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-12 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-12. Radiated Limits

Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 59 of 95

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

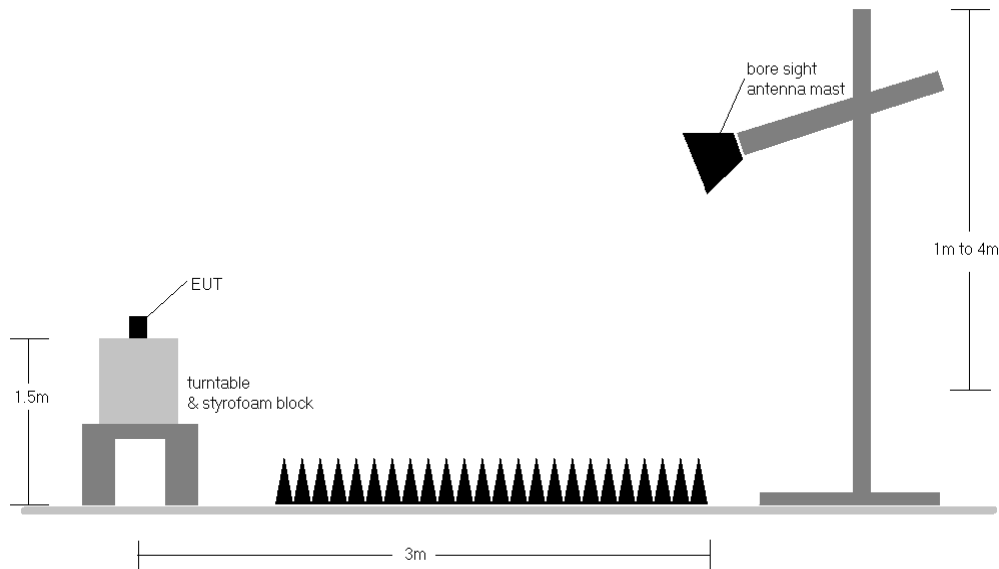


Figure 7-8. Radiated Test Setup >1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-12.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. The duty cycle correction factor was not applied to noise floor measurements.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. Both power schemes were investigated and only the worst case is reported

Sample Calculation


- o Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}] + \text{Duty Cycle Correction} [\text{dB}]$
- o $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- o $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 60 of 95


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


Ant 4a

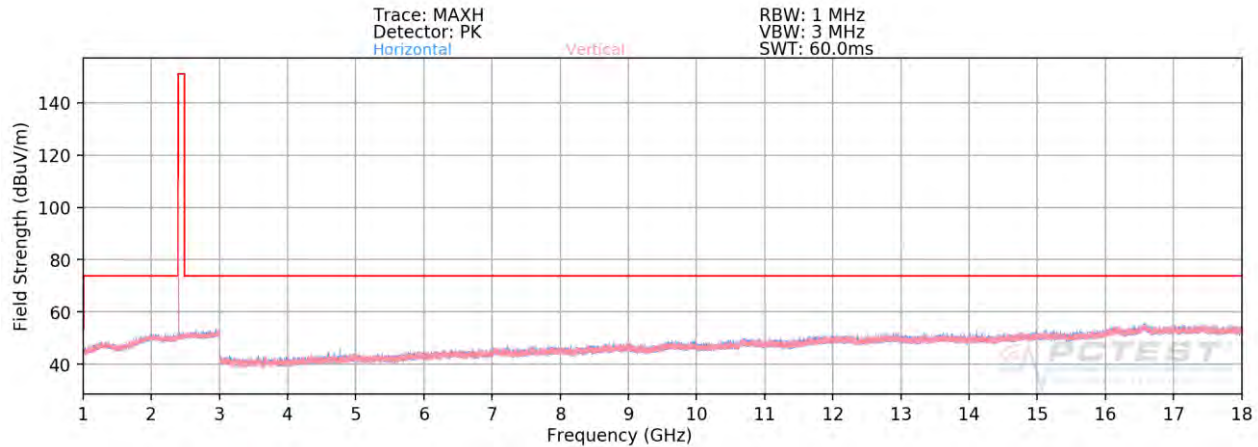

Plot 7-57. Radiated Spurious Plot above 1GHz Ant 4a (BT GFSK ePA – Ch. 0)

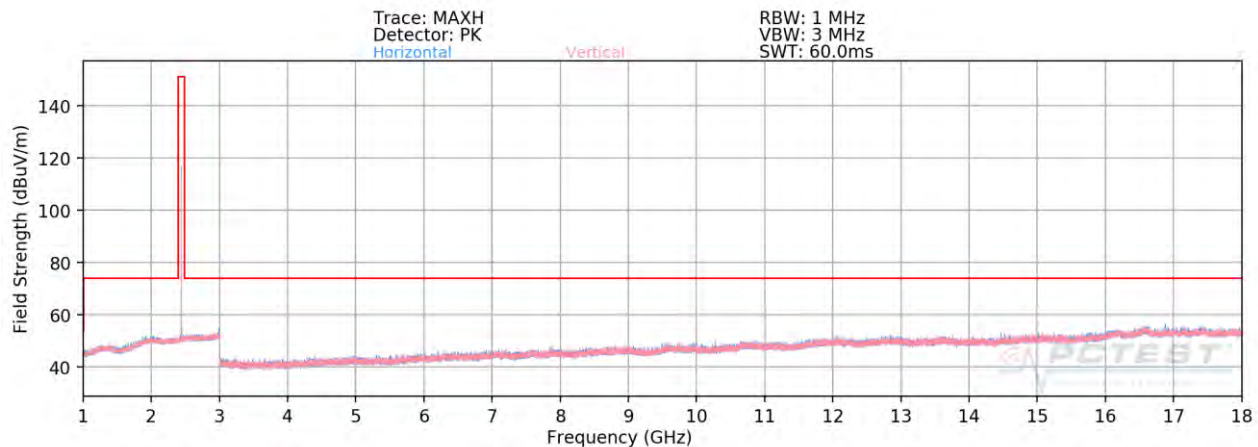

Plot 7-58. Radiated Spurious Plot above 1GHz Ant 4a (BT GFSK ePA – Ch. 39)

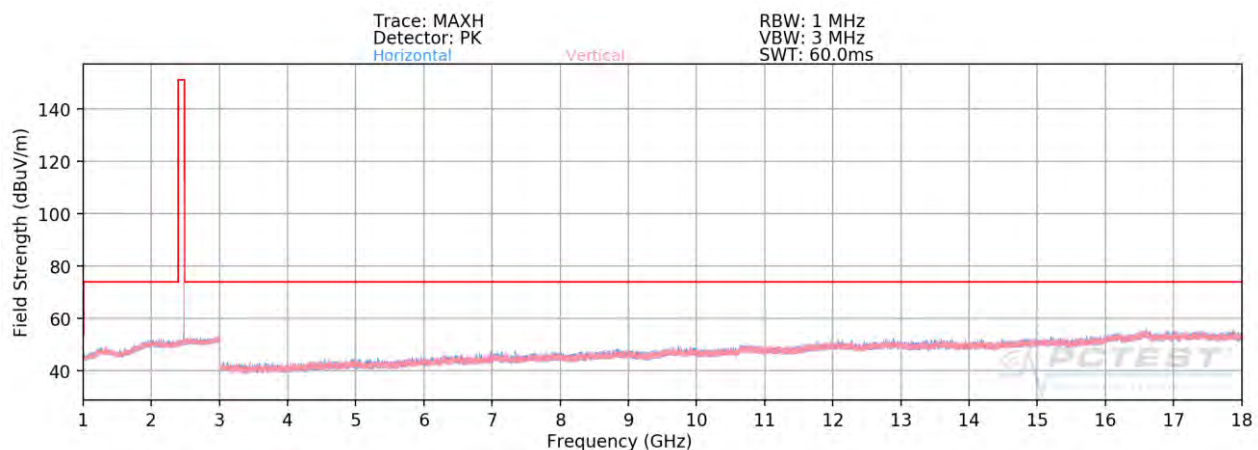


Plot 7-59. Radiated Spurious Plot above 1GHz Ant 4a (BT GFSK ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 61 of 95


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


Ant 2a

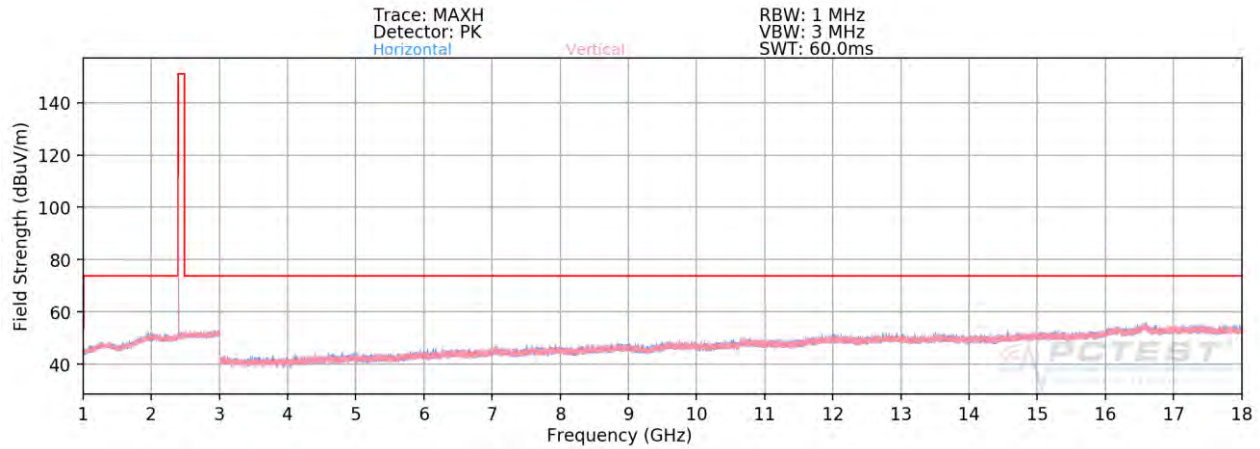

Plot 7-60. Radiated Spurious Plot above 1GHz Ant 2a (BT GFSK ePA – Ch. 0)

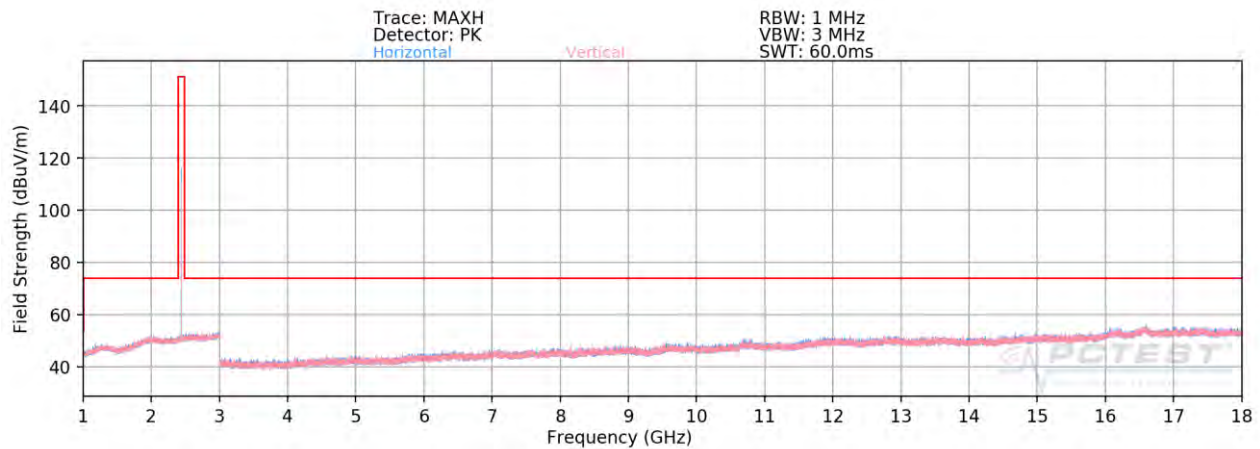

Plot 7-61. Radiated Spurious Plot above 1GHz Ant 2a (BT GFSK ePA – Ch. 39)

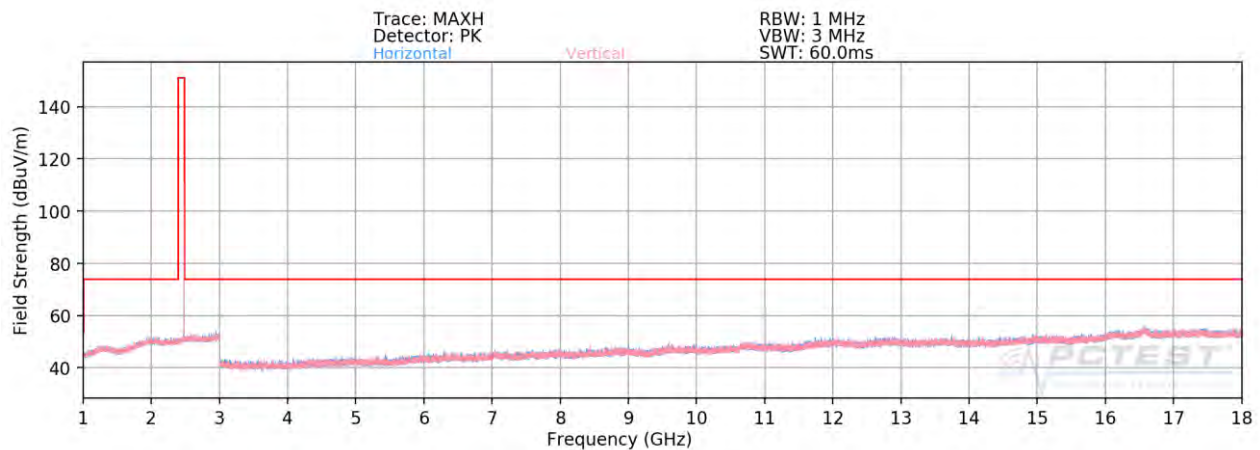


Plot 7-62. Radiated Spurious Plot above 1GHz Ant 2a (BT GFSK ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 62 of 95


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


Tx-BF (Beamforming Mode)

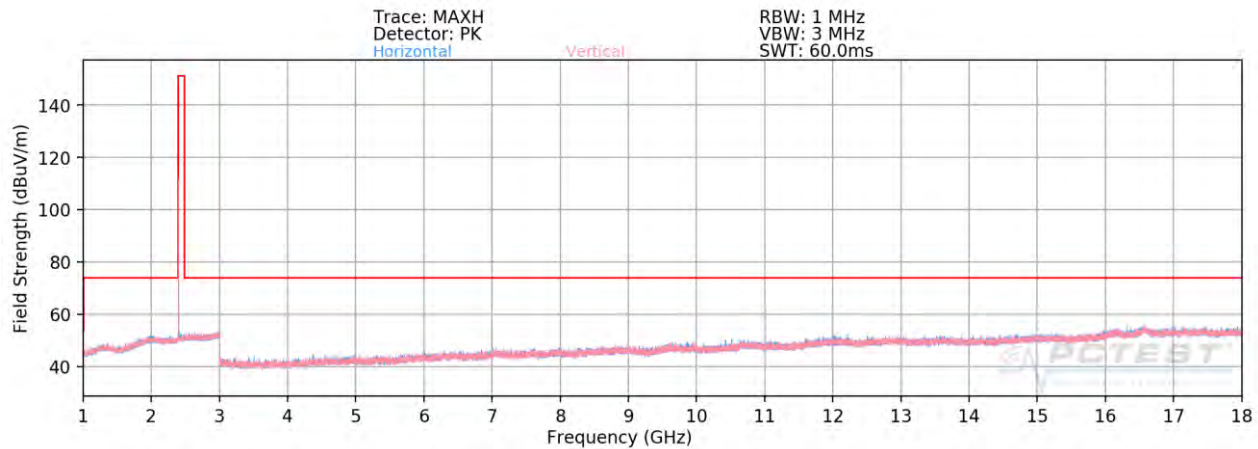

Plot 7-63. Radiated Spurious Plot above 1GHz TXBF (BT GFSK ePA – Ch. 0)

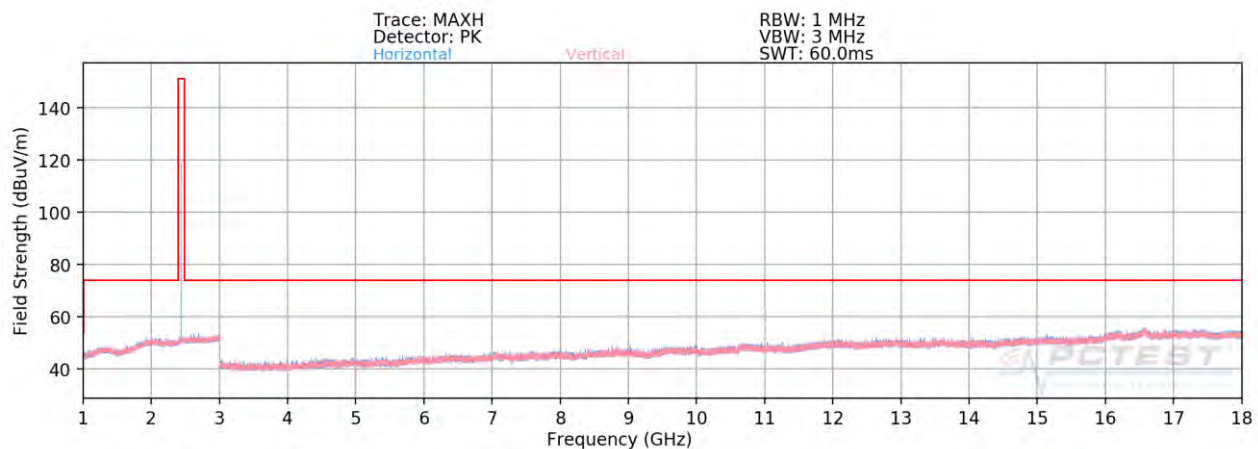

Plot 7-64. Radiated Spurious Plot above 1GHz TXBF (BT GFSK ePA – Ch. 39)

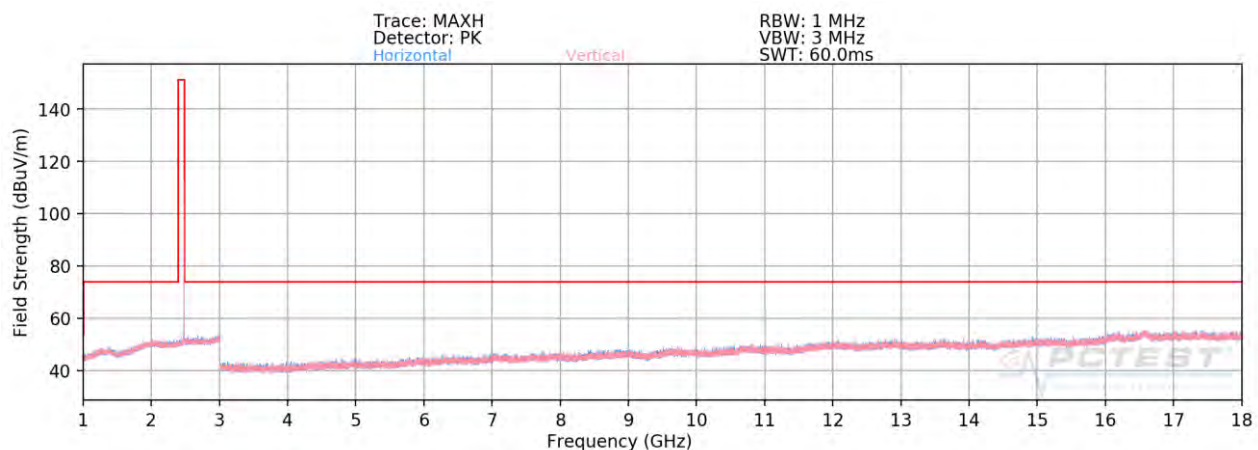


Plot 7-65. Radiated Spurious Plot above 1GHz TXBF (BT GFSK ePA – Ch. 78)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 63 of 95




Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

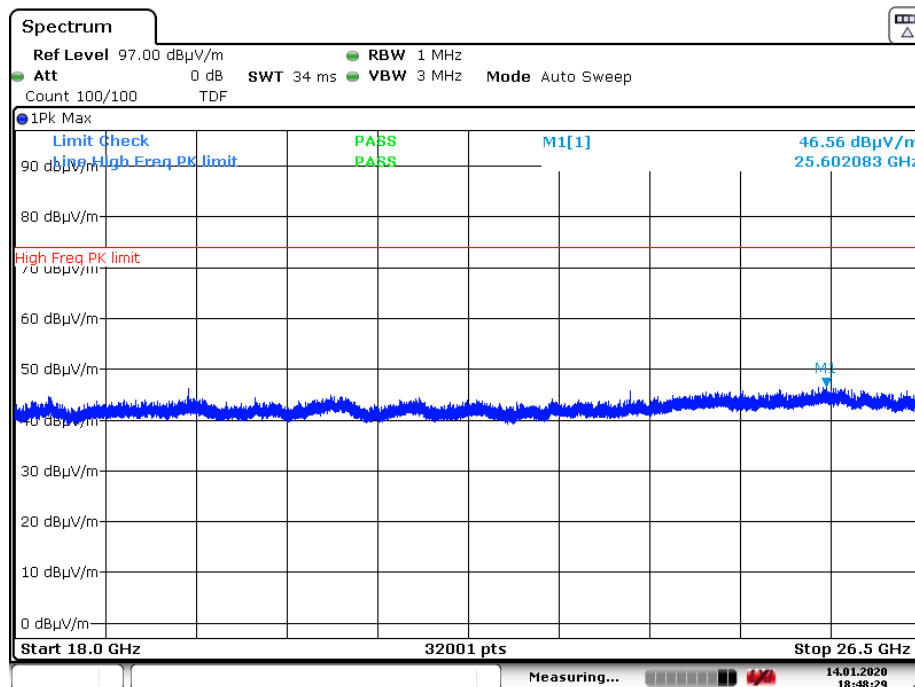

Plot 7-66. Radiated Spurious Plot above 18GHz TXBF (GFSK ePA, Pol. H)

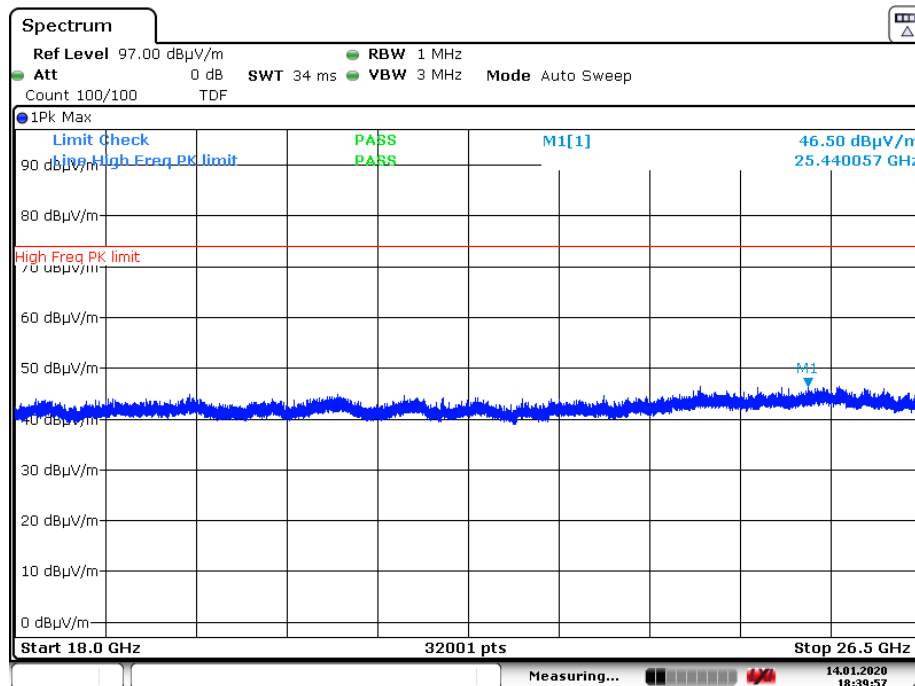

Plot 7-67. Radiated Spurious Plot above 18GHz TXBF (GFSK ePA, Pol. V)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 64 of 95

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V 9.0 02/01/2019

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Ant 4a

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	-	-	-79.46	5.39	32.93	53.98	-21.05
4804.00	Peak	H	-	-	-68.27	5.39	44.12	73.98	-29.86
12010.00	Avg	H	-	-	-82.40	14.50	39.10	53.98	-14.88
12010.00	Peak	H	-	-	-71.51	14.50	49.99	73.98	-23.99

Table 7-13. Radiated Measurements

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	-	-	-80.27	5.46	32.19	53.98	-21.79
4882.00	Peak	H	-	-	-69.26	5.46	43.20	73.98	-30.78
7323.00	Avg	H	-	-	-81.37	9.00	34.63	53.98	-19.35
7323.00	Peak	H	-	-	-70.38	9.00	45.62	73.98	-28.36
12205.00	Avg	H	-	-	-82.17	14.88	39.71	53.98	-14.26
12205.00	Peak	H	-	-	-71.00	14.88	50.88	73.98	-23.09

Table 7-14. Radiated Measurements

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 65 of 95



Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2480MHz
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	-	-	-80.19	6.16	32.97	53.98	-21.01
4960.00	Peak	H	-	-	-69.37	6.16	43.79	73.98	-30.19
7440.00	Avg	H	-	-	-82.08	9.86	34.78	53.98	-19.20
7440.00	Peak	H	-	-	-70.58	9.86	46.28	73.98	-27.70
12400.00	Avg	H	-	-	-83.38	14.54	38.16	53.98	-15.82
12400.00	Peak	H	-	-	-72.22	14.54	49.32	73.98	-24.66

Table 7-15. Radiated Measurements

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 66 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Ant 2a

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	117	27	-74.52	5.39	37.87	53.98	-16.11
4804.00	Peak	H	117	27	-66.69	5.39	45.70	73.98	-28.28
12010.00	Avg	H	-	-	-82.72	14.50	38.78	53.98	-15.20
12010.00	Peak	H	-	-	-71.65	14.50	49.85	73.98	-24.13

Table 7-16. Radiated Measurements

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	122	30	-79.71	5.46	32.75	53.98	-21.23
4882.00	Peak	H	122	30	-69.33	5.46	43.13	73.98	-30.85
7323.00	Avg	H	-	-	-80.95	9.00	35.05	53.98	-18.93
7323.00	Peak	H	-	-	-70.19	9.00	45.81	73.98	-28.17
12205.00	Avg	H	-	-	-82.32	14.88	39.56	53.98	-14.41
12205.00	Peak	H	-	-	-71.54	14.88	50.34	73.98	-23.63

Table 7-17. Radiated Measurements

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 67 of 95



Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2480MHz
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	-	-	-80.36	6.16	32.80	53.98	-21.18
4960.00	Peak	H	-	-	-69.31	6.16	43.85	73.98	-30.13
7440.00	Avg	H	-	-	-82.07	9.86	34.79	53.98	-19.19
7440.00	Peak	H	-	-	-71.33	9.86	45.53	73.98	-28.45
12400.00	Avg	H	-	-	-83.17	14.54	38.37	53.98	-15.61
12400.00	Peak	H	-	-	-71.74	14.54	49.80	73.98	-24.18

Table 7-18. Radiated Measurements

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 68 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Tx-BF (Beamforming Mode)

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	114	27	-74.57	5.39	37.82	53.98	-16.16
4804.00	Peak	H	114	27	-66.30	5.39	46.09	73.98	-27.89
12010.00	Avg	H	-	-	-82.70	14.50	38.80	53.98	-15.18
12010.00	Peak	H	-	-	-71.52	14.50	49.98	73.98	-24.00

Table 7-19. Radiated Measurements

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	-	-	-80.34	5.46	32.12	53.98	-21.86
4882.00	Peak	H	-	-	-68.94	5.46	43.52	73.98	-30.46
7323.00	Avg	H	-	-	-81.15	9.00	34.85	53.98	-19.13
7323.00	Peak	H	-	-	-70.27	9.00	45.73	73.98	-28.25
12205.00	Avg	H	-	-	-82.26	14.88	39.62	53.98	-14.35
12205.00	Peak	H	-	-	-71.08	14.88	50.80	73.98	-23.17

Table 7-20. Radiated Measurements

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 69 of 95



Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2480MHz
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-80.41	6.16	32.75	53.98	-21.23
4960.00	Peak	H	-	-	-69.10	6.16	44.06	73.98	-29.92
7440.00	Avg	H	-	-	-81.97	9.86	34.89	53.98	-19.09
7440.00	Peak	H	-	-	-71.41	9.86	45.45	73.98	-28.53
12400.00	Avg	H	-	-	-83.44	14.54	38.10	53.98	-15.88
12400.00	Peak	H	-	-	-72.45	14.54	49.09	73.98	-24.89

Table 7-21. Radiated Measurements

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 70 of 95

© 2020 PCTEST

V 9.0 02/01/2019


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Simultaneous Tx Radiated Spurious Emission Measurements

§15.247 §15.205 & §15.209; RSS-Gen [8.9]


Description	Bluetooth	LTE
Antenna	4a	4a
Channel	6	39750
Operating Frequency (MHz)	2480	2506
Mode/Modulation	GFSK ePA	QPSK/1RB/20MHz

Table 7-22. Worst Case Simultaneous Transmission Config

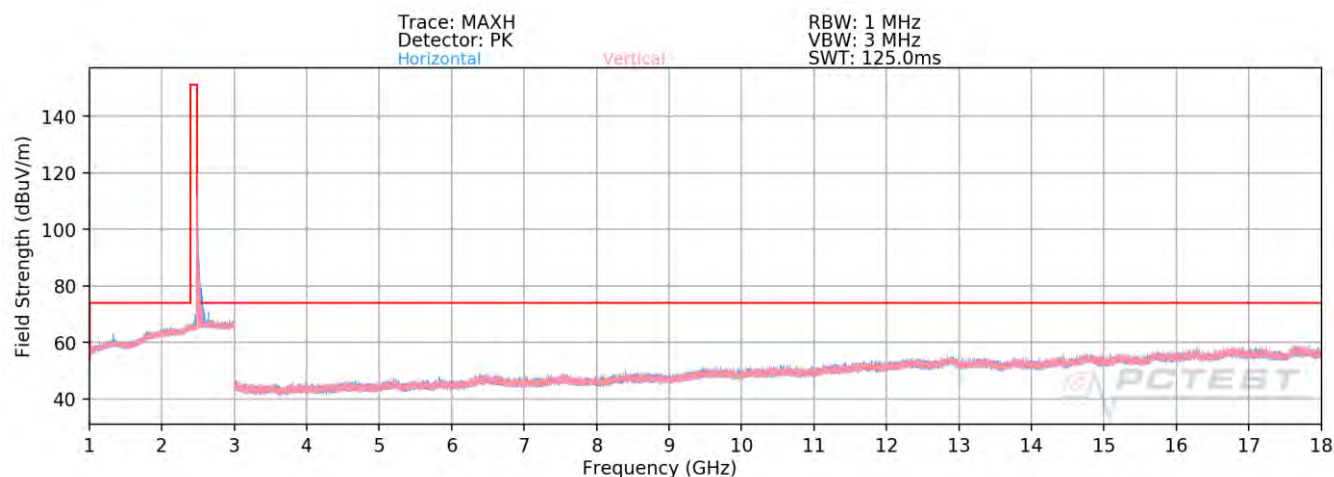


Plot 7-68. Radiated Spurious Plot above 1GHz Simultaneous Tx

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 71 of 95

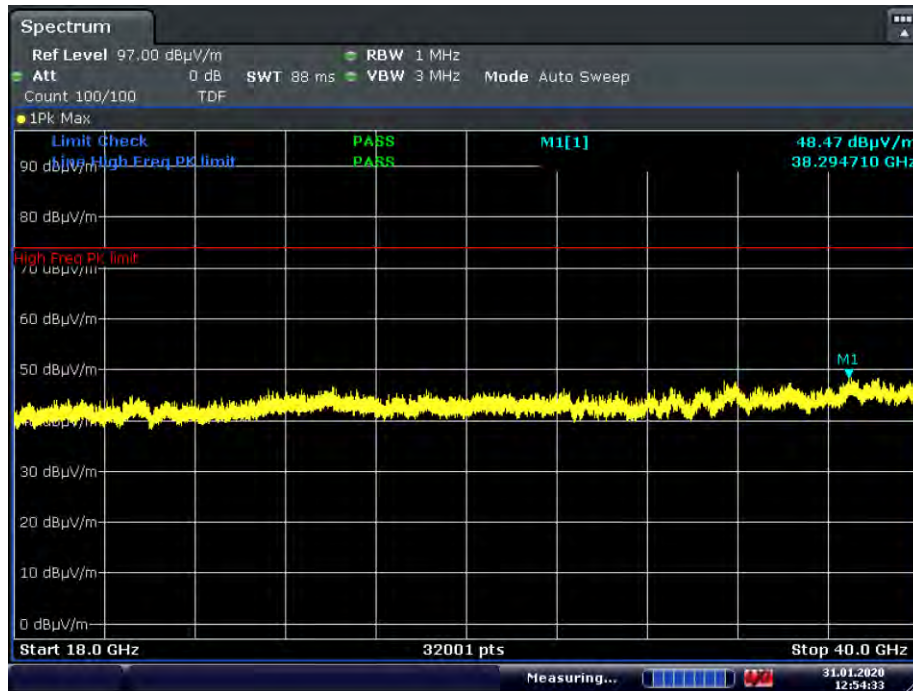

Plot 7-69. Radiated Spurious Plot 18GHz Simultaneous Tx – 40GHz Pol. H

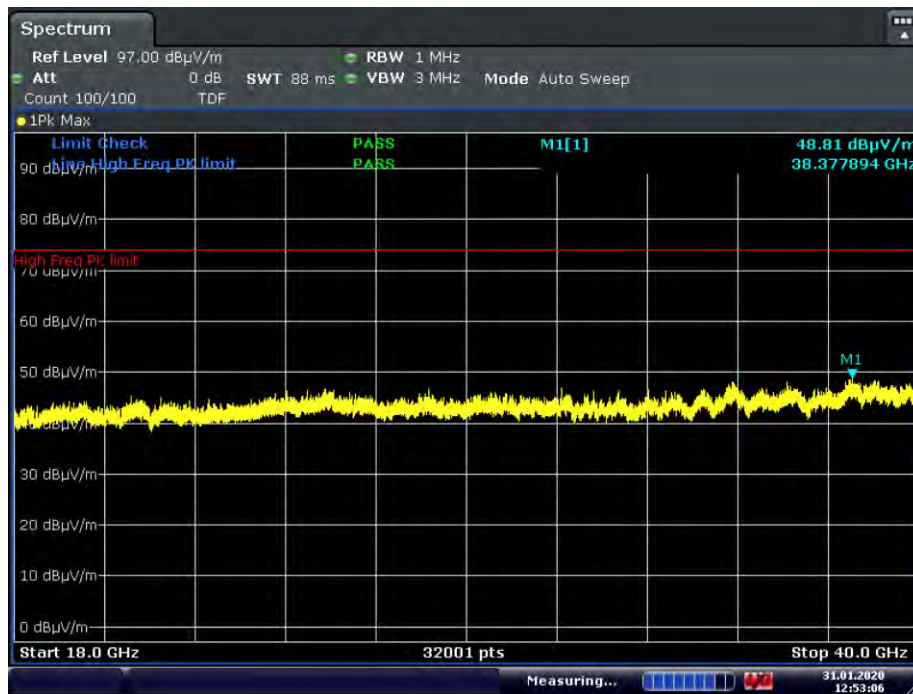

Plot 7-70. Radiated Spurious Plot 18GHz Simultaneous Tx – 40GHz Pol. V

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 72 of 95



Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	V	-	-	-77.72	5.73	35.01	53.98	-18.97
4960.00	Peak	V	-	-	-67.42	5.73	45.31	73.98	-28.67
7440.00	Avg	V	-	-	-78.02	8.69	37.67	53.98	-16.31
7440.00	Peak	V	-	-	-67.37	8.69	48.32	73.98	-25.66
12400.00	Avg	V	-	-	-79.90	15.41	42.51	53.98	-11.47
12400.00	Peak	V	-	-	-68.74	15.41	53.67	73.98	-20.31

Table 7-23. Radiated Measurements Simultaneous Tx

FCC ID: BCGA2230	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 73 of 95

7.10 Radiated Restricted Band Edge Measurement


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain + DCCF

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

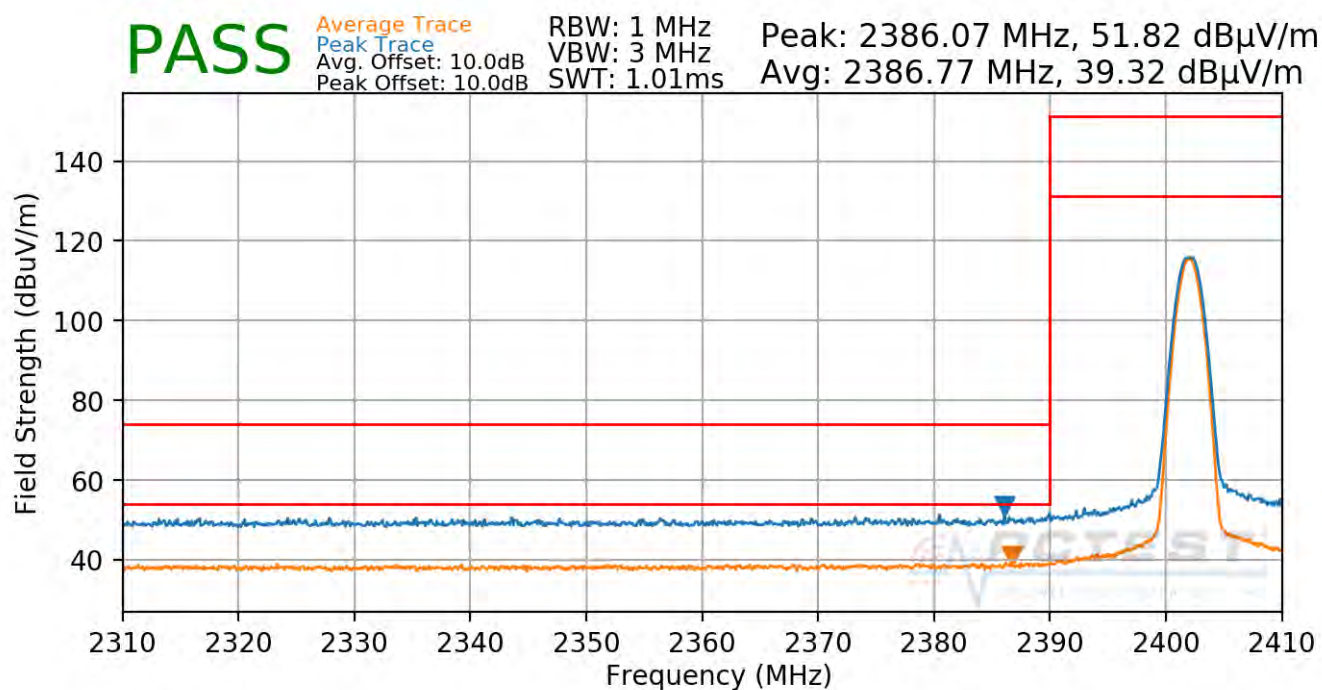

Plot 7-71. Radiated Restricted Lower Band Edge Measurement Ant 4a (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 74 of 95




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

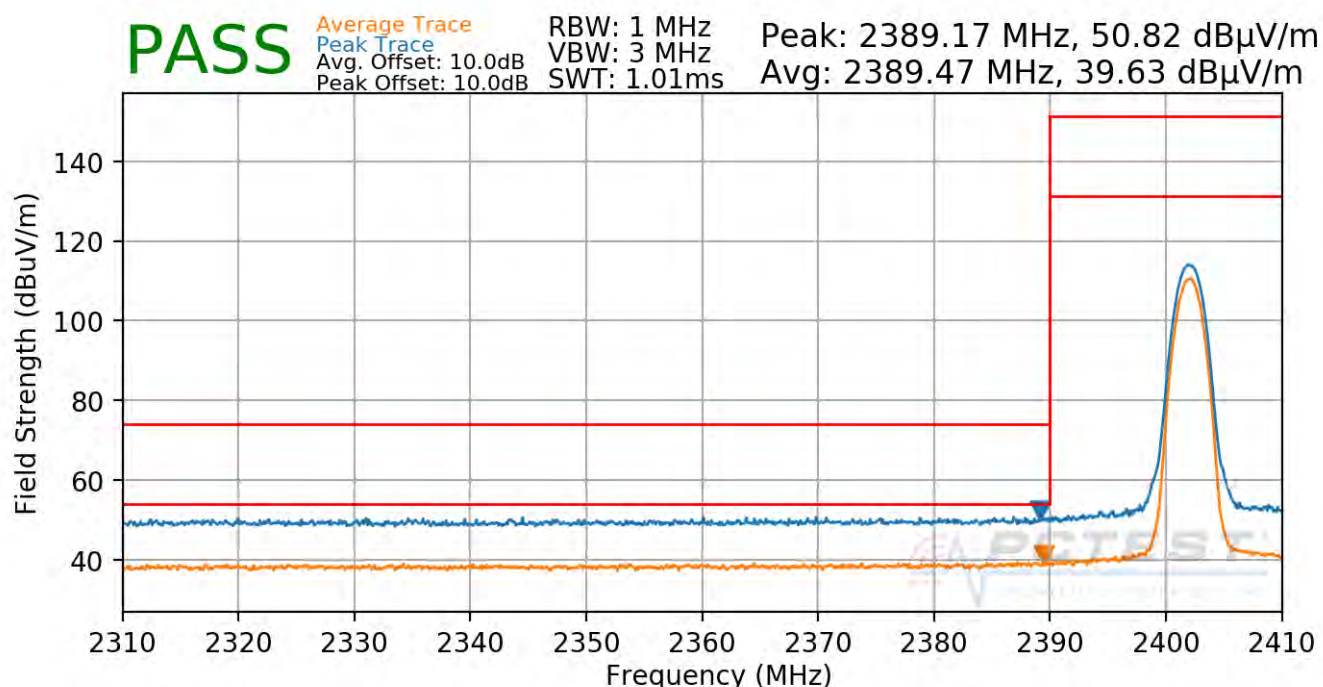

Plot 7-72. Radiated Restricted Lower Band Edge Measurement Ant 4a (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 75 of 95

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V 9.0 02/01/2019




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

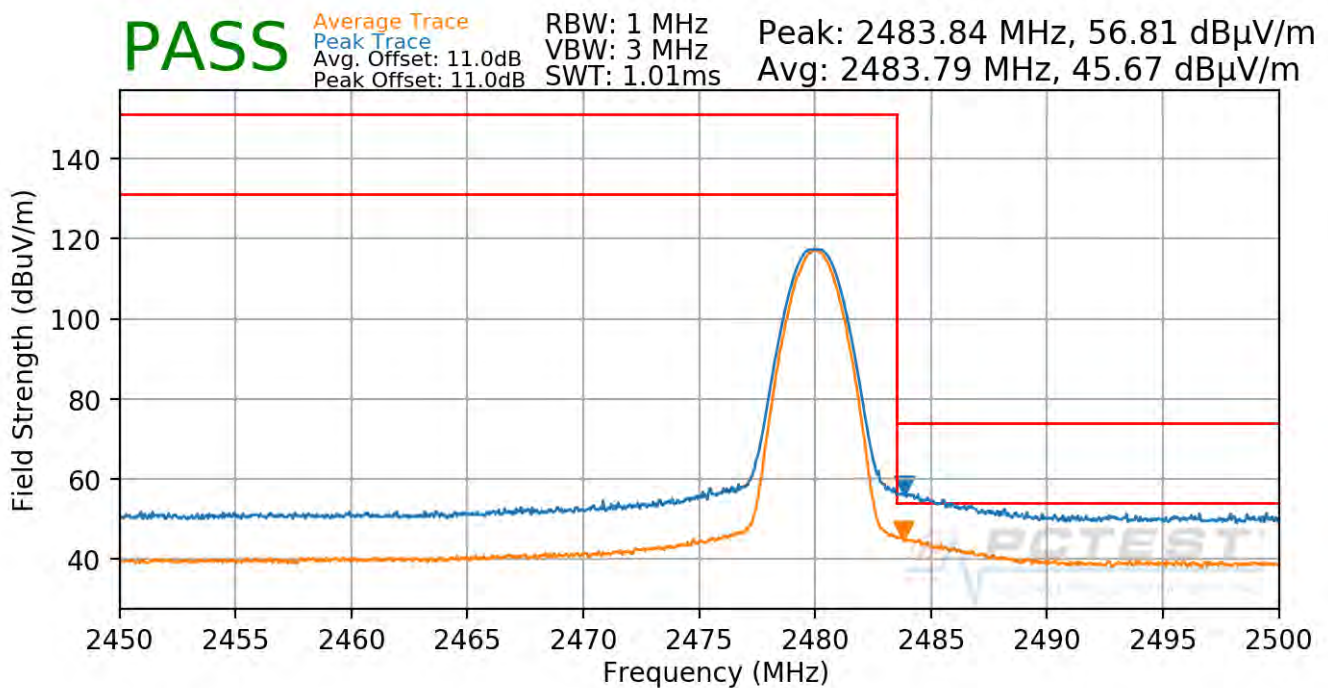

Plot 7-73. Radiated Restricted Upper Band Edge Measurement Ant 4a (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 76 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

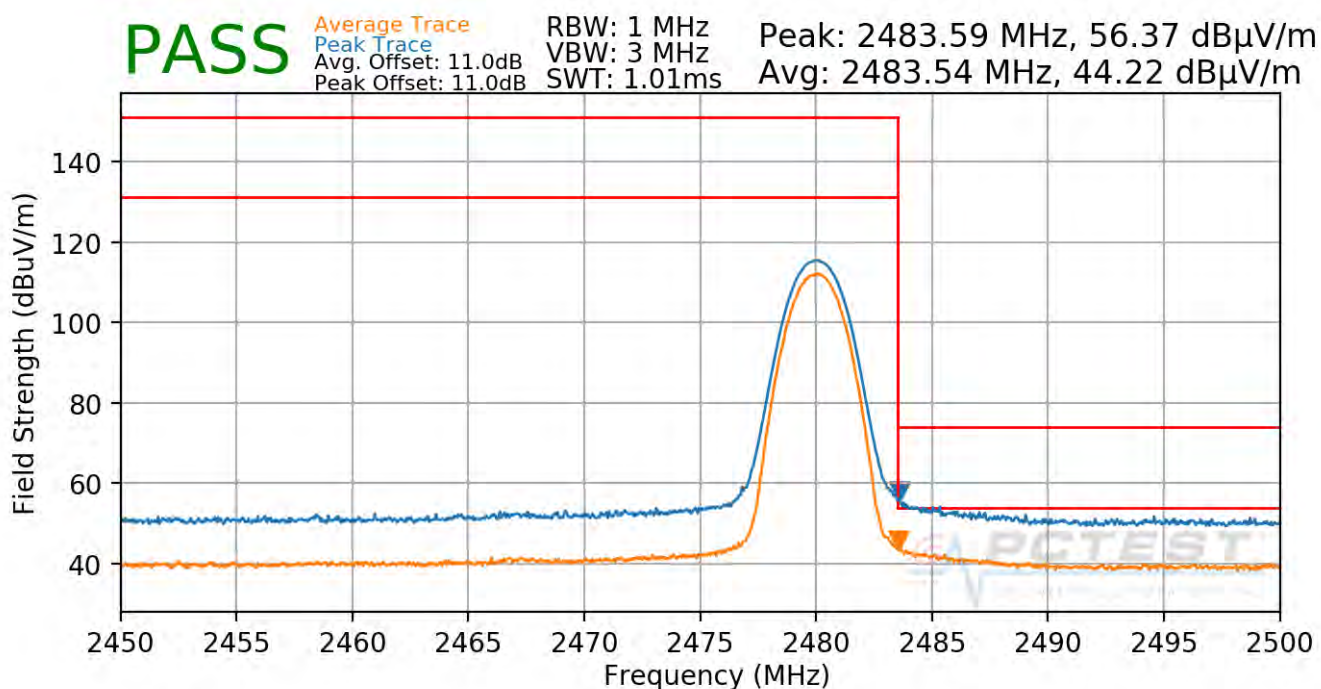

Plot 7-74. Radiated Restricted Upper Band Edge Measurement Ant 4a (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 77 of 95




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

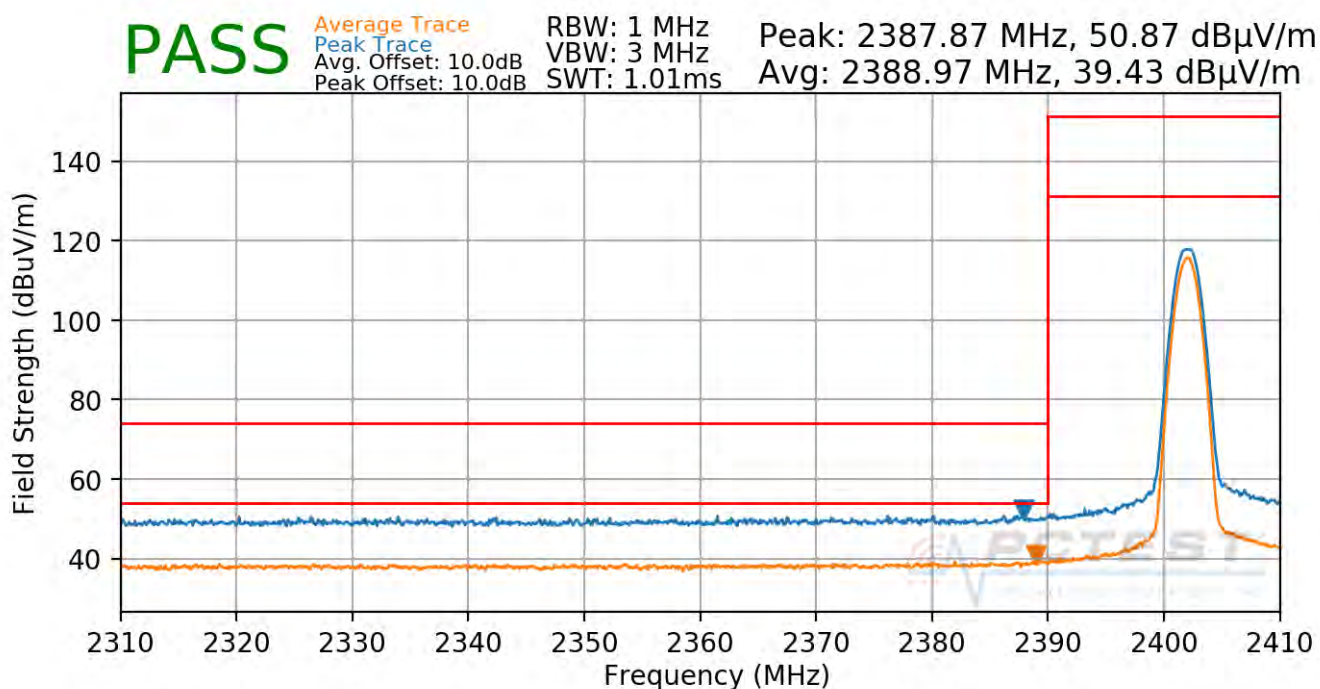

Plot 7-75. Radiated Restricted Lower Band Edge Measurement Ant 2a (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 78 of 95

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V 9.0 02/01/2019




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

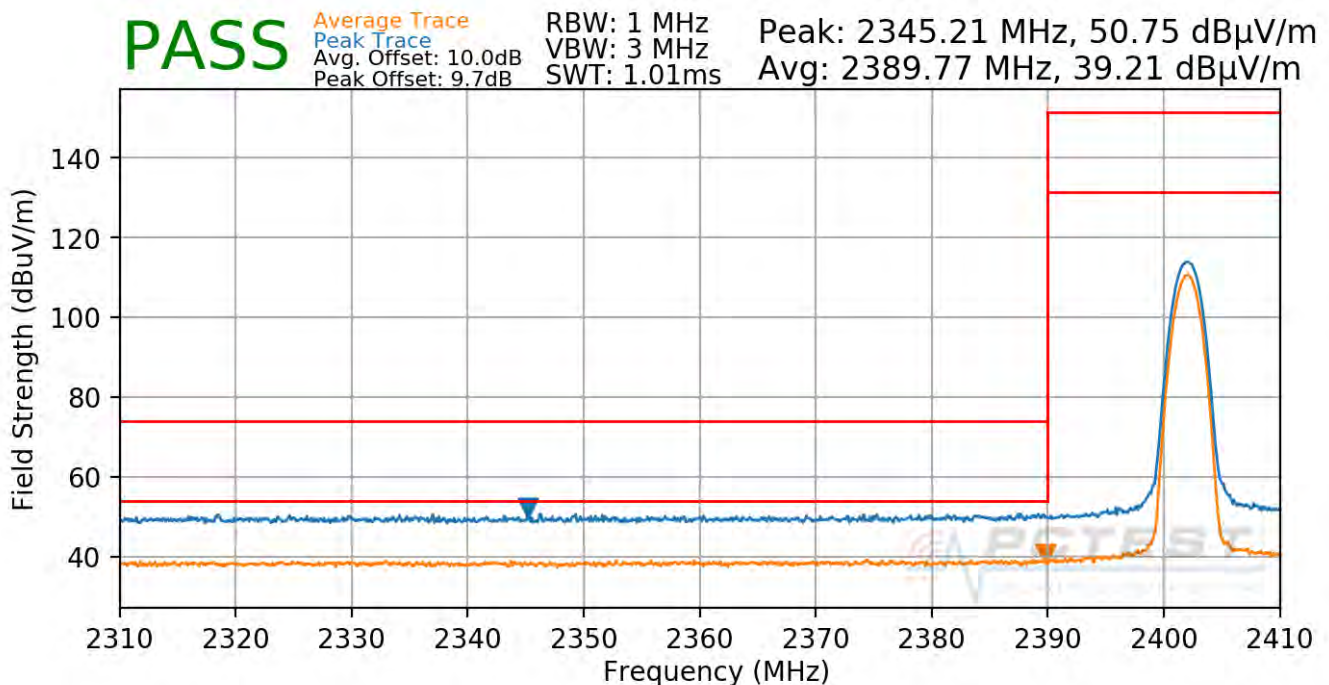

Plot 7-76. Radiated Restricted Lower Band Edge Measurement Ant 2a (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 79 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

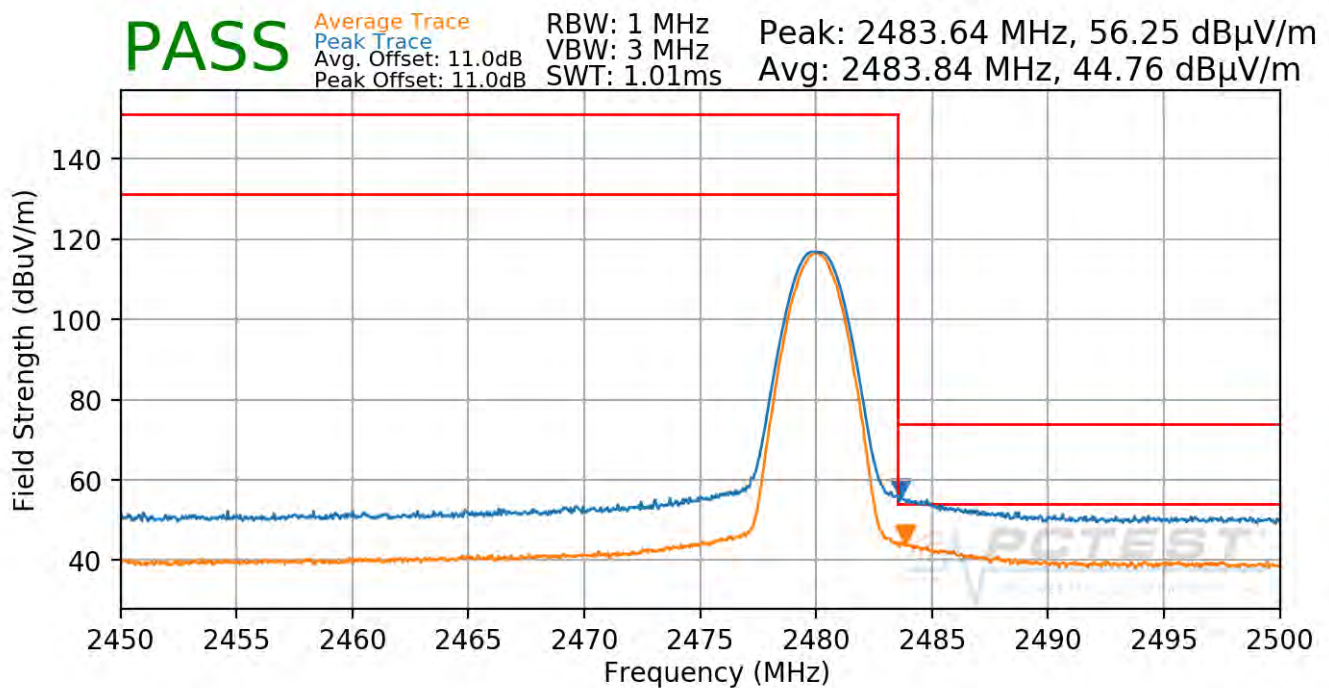

Plot 7-77. Radiated Restricted Upper Band Edge Measurement Ant 2a (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 80 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

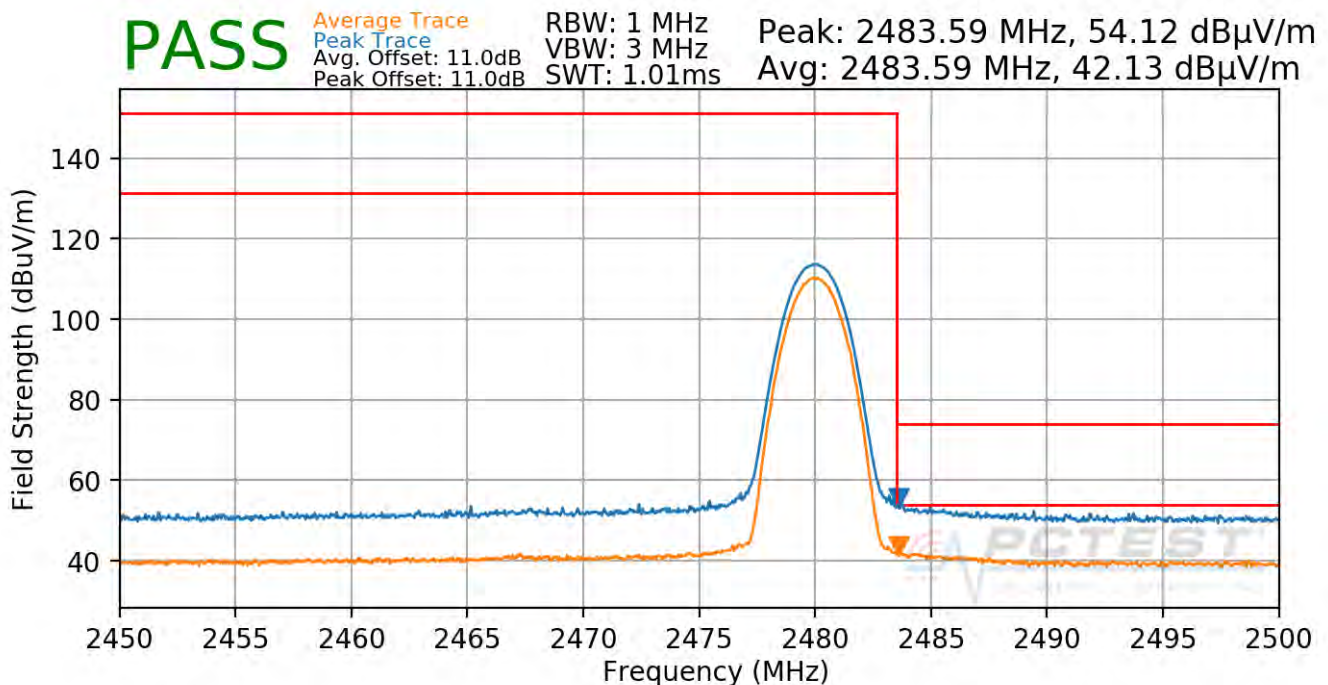

Plot 7-78. Radiated Restricted Upper Band Edge Measurement Ant 2a (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 81 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

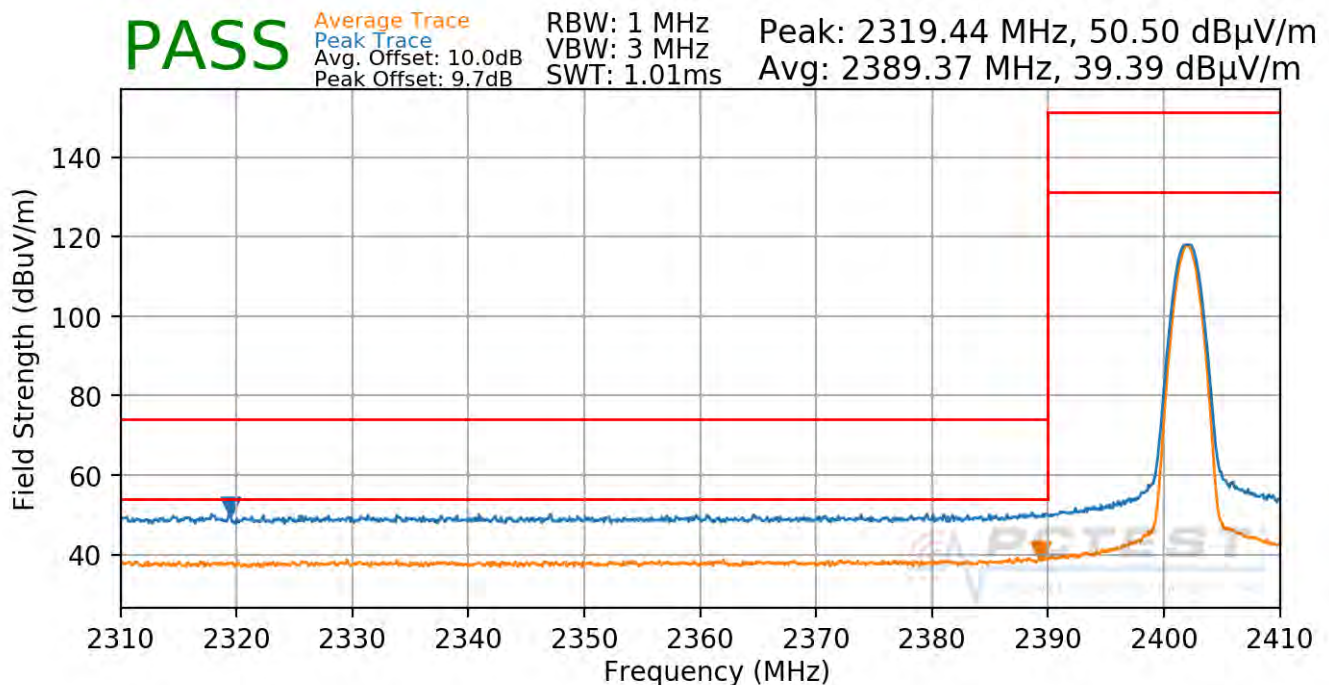

Plot 7-79. Radiated Restricted Lower Band Edge Measurement TXBF (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 82 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

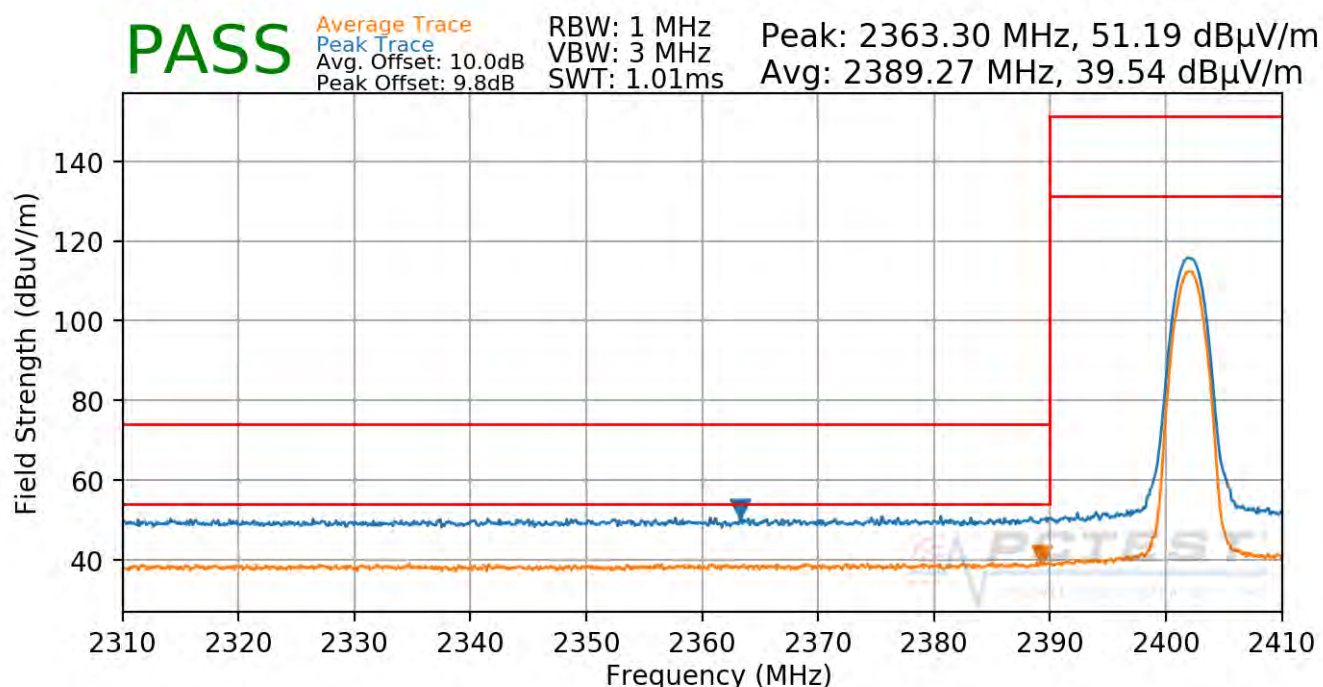

Plot 7-80. Radiated Restricted Lower Band Edge Measurement TXBF (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 83 of 95

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V 9.0 02/01/2019




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

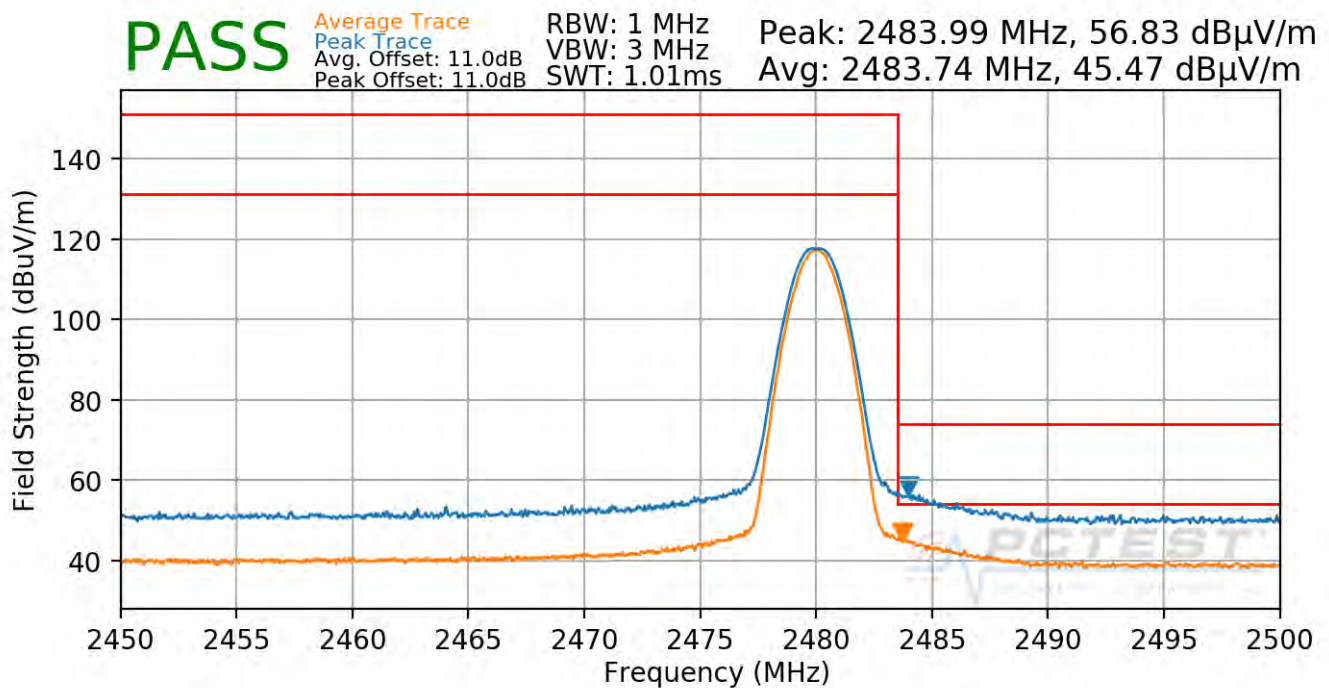

Plot 7-81. Radiated Restricted Upper Band Edge Measurement TXBF (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 84 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

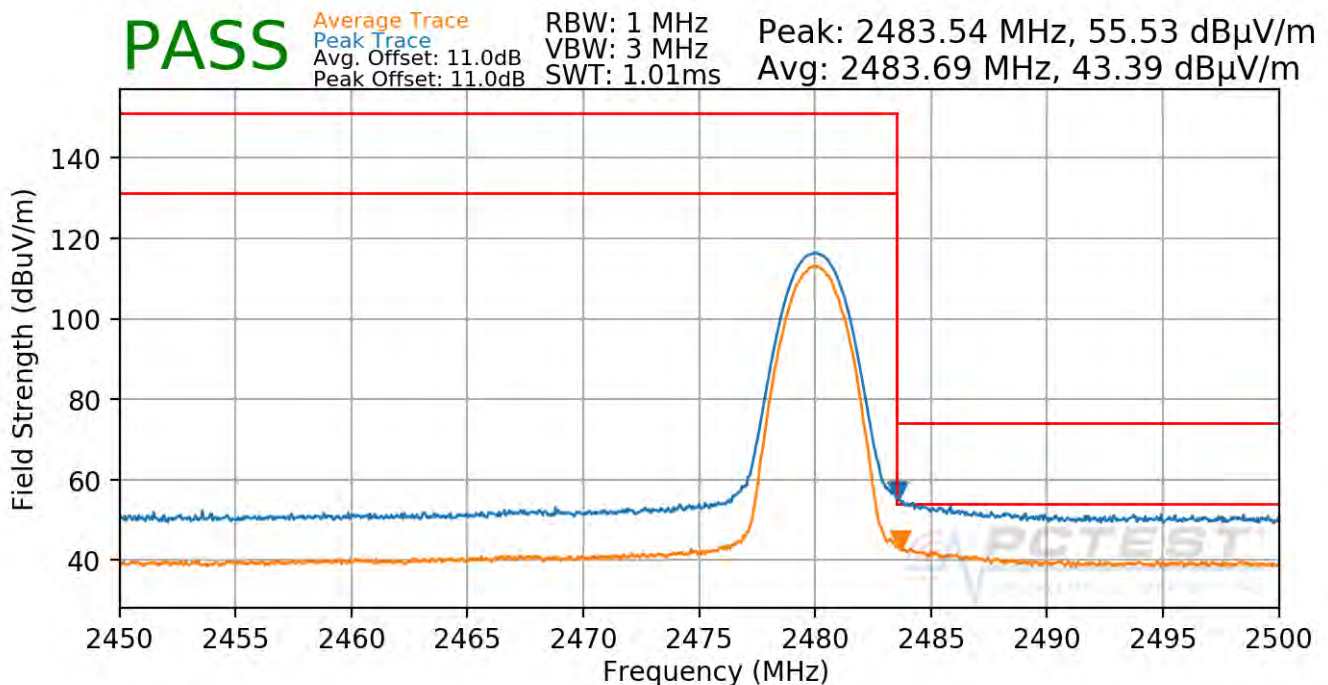

Plot 7-82. Radiated Restricted Upper Band Edge Measurement TXBF (Average & Peak)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 85 of 95

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.11 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-24 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-24. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 86 of 95

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

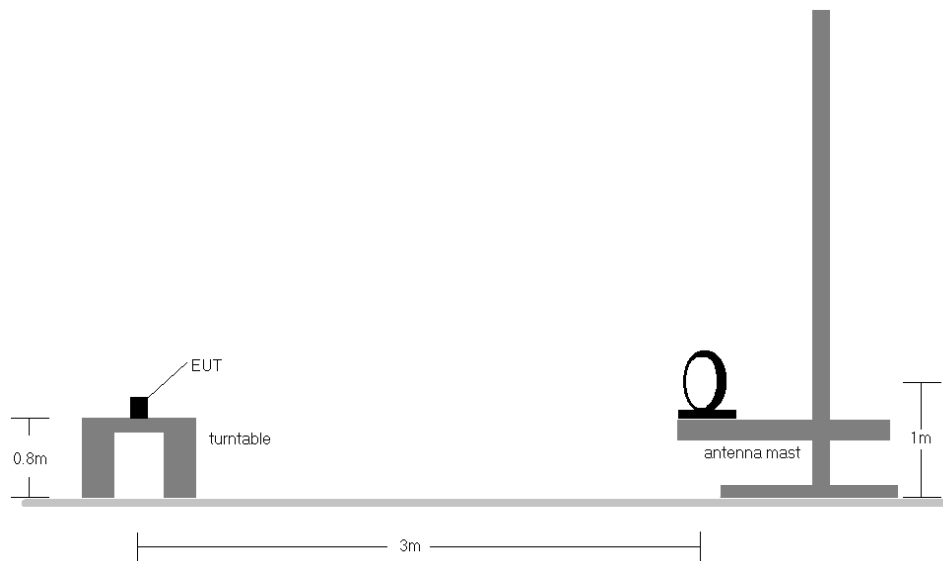


Figure 7-9. Radiated Test Setup < 30MHz

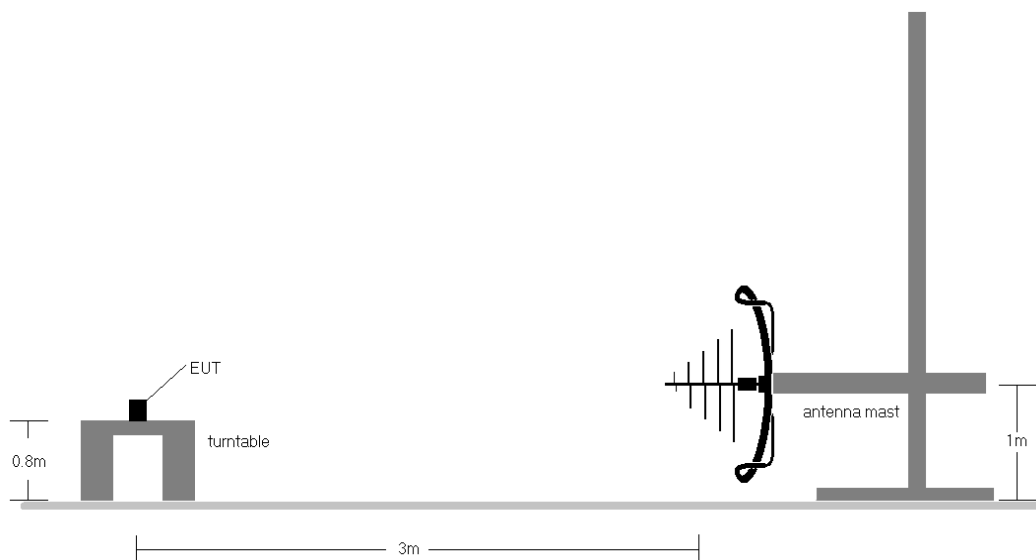


Figure 7-10. Radiated Test Setup < 1GHz

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 87 of 95




Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-24.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
10. The unit was tested with all possible mode and power schemes and only the highest emission is reported.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 88 of 95

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

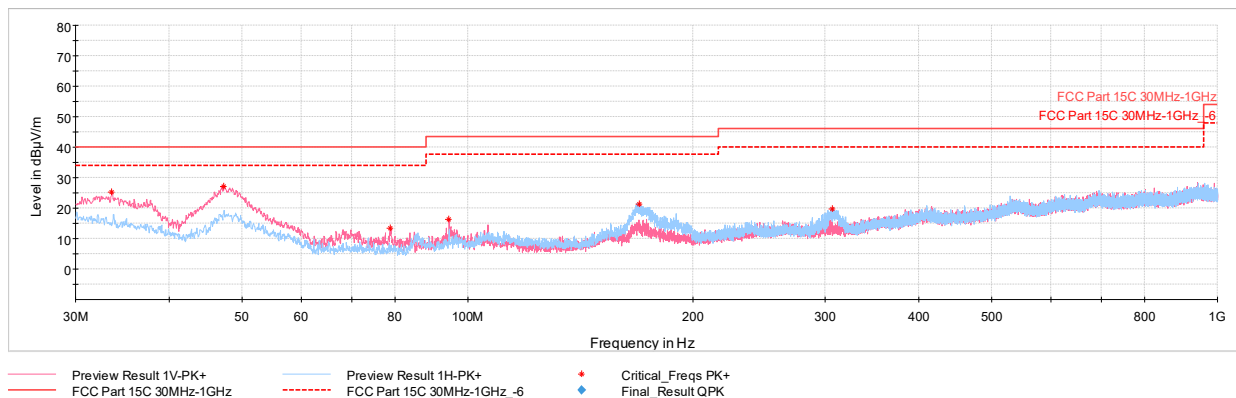

Plot 7-83. Radiated Spurious Plot below 1GHz GFSK ePA TxBF – Ch.39 , with AC/DC Adapter)


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
33.54	Max Peak	V	100	257	-67.89	-13.76	25.35	40.00	-14.65
47.32	Max Peak	V	100	281	-58.99	-20.80	27.21	40.00	-12.79
78.79	Max Peak	V	100	53	-72.45	-21.19	13.36	40.00	-26.64
94.46	Max Peak	V	100	68	-70.25	-20.40	16.35	43.52	-27.17
169.24	Max Peak	H	100	91	-68.02	-17.71	21.27	43.52	-22.25
306.11	Max Peak	H	100	252	-73.80	-13.37	19.83	46.02	-26.19

Table 7-25. Radiated Spurious Emissions Below 1GHz GFSK ePA TxBF – Ch.39, with AC/DC Adapter)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 89 of 95

Simultaneous TX Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

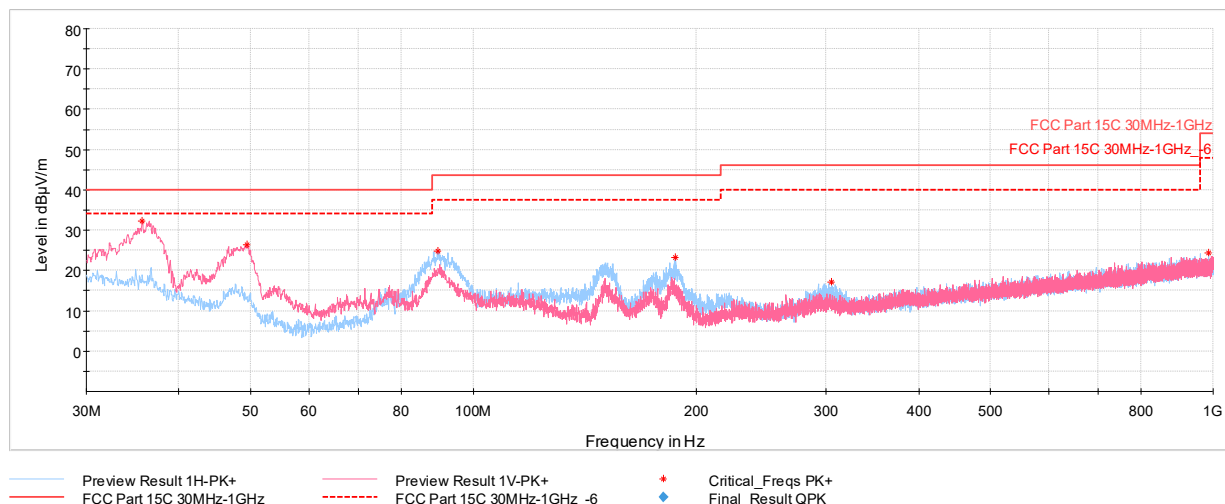

Plot 7-84. Radiated Spurious Plot below 1GHz Simultaneous Tx, with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
35.72	Max Peak	V	100	328	-62.76	-11.88	32.36	40.00	-7.64
49.40	Max Peak	V	100	345	-59.59	-21.05	26.36	40.00	-13.64
89.46	Max Peak	H	250	217	-63.98	-18.24	24.78	43.52	-18.74
187.72	Max Peak	H	100	260	-64.37	-19.41	23.22	43.52	-20.30
305.24	Max Peak	H	100	221	-74.57	-15.37	17.06	46.02	-28.96
987.00	Max Peak	H	250	217	-78.89	-3.72	24.39	53.98	-29.59

Table 7-26. Radiated Spurious Emissions Below 1GHz Simultaneous Tx, with AC/DC Adapter

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 90 of 95

7.12 AC Line Conducted Measurement Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-27. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 91 of 95

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


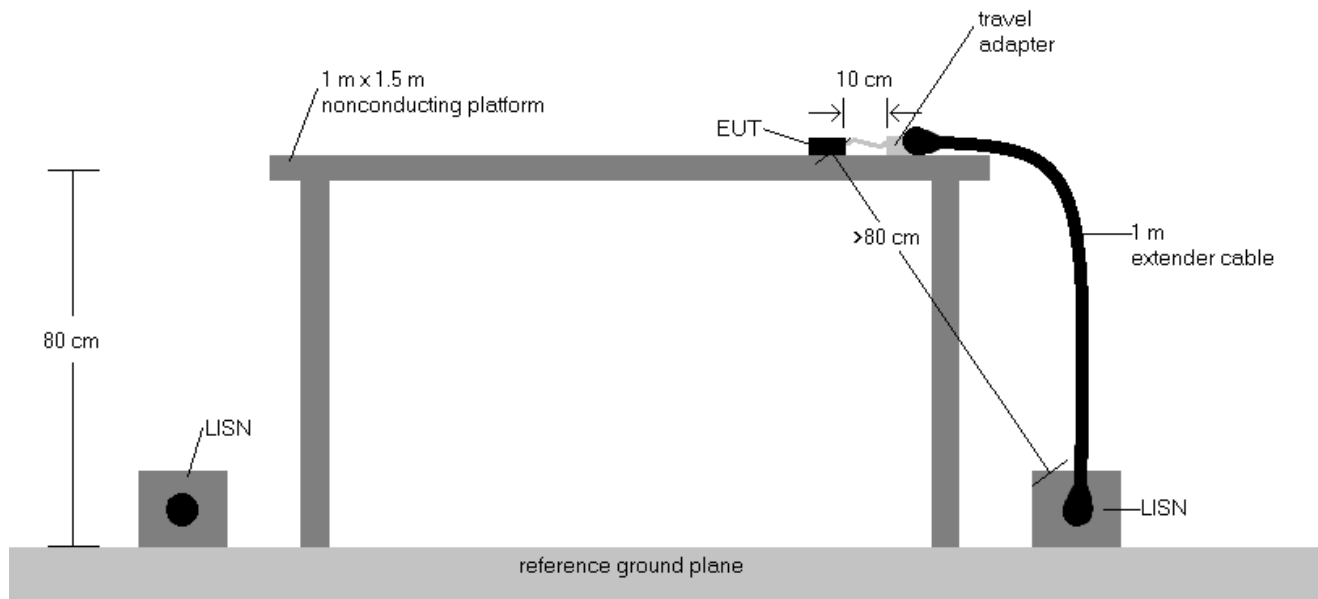


Figure 7-11. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using quasi-peak and average detectors.
7. Deviations to the Specifications: None.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 92 of 95

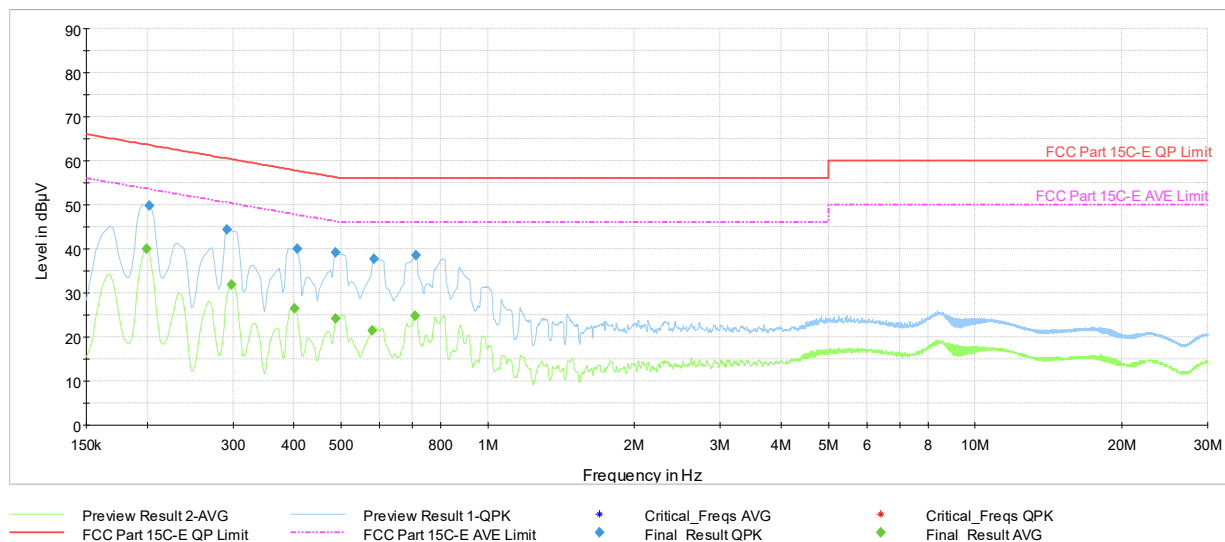


Plot 7-85. Line-Conducted Test Plot- Ch.39 TxBF (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.200	FINAL	—	39.99	53.63	-13.64	L1	GND
0.202	FINAL	49.79	—	63.54	-13.75	L1	GND
0.292	FINAL	44.47	—	60.47	-16.00	L1	GND
0.299	FINAL	—	31.84	50.28	-18.44	L1	GND
0.402	FINAL	—	26.36	47.81	-21.45	L1	GND
0.407	FINAL	39.98	—	57.72	-17.74	L1	GND
0.488	FINAL	—	24.11	46.21	-22.10	L1	GND
0.488	FINAL	39.09	—	56.21	-17.12	L1	GND
0.580	FINAL	—	21.39	46.00	-24.61	L1	GND
0.584	FINAL	37.79	—	56.00	-18.21	L1	GND
0.708	FINAL	—	24.89	46.00	-21.11	L1	GND
0.713	FINAL	38.44	—	56.00	-17.56	L1	GND

Table 7-28. Line-Conducted Test Data- Ch.39 TxBF (L1, with AC/DC Adapter)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 93 of 95

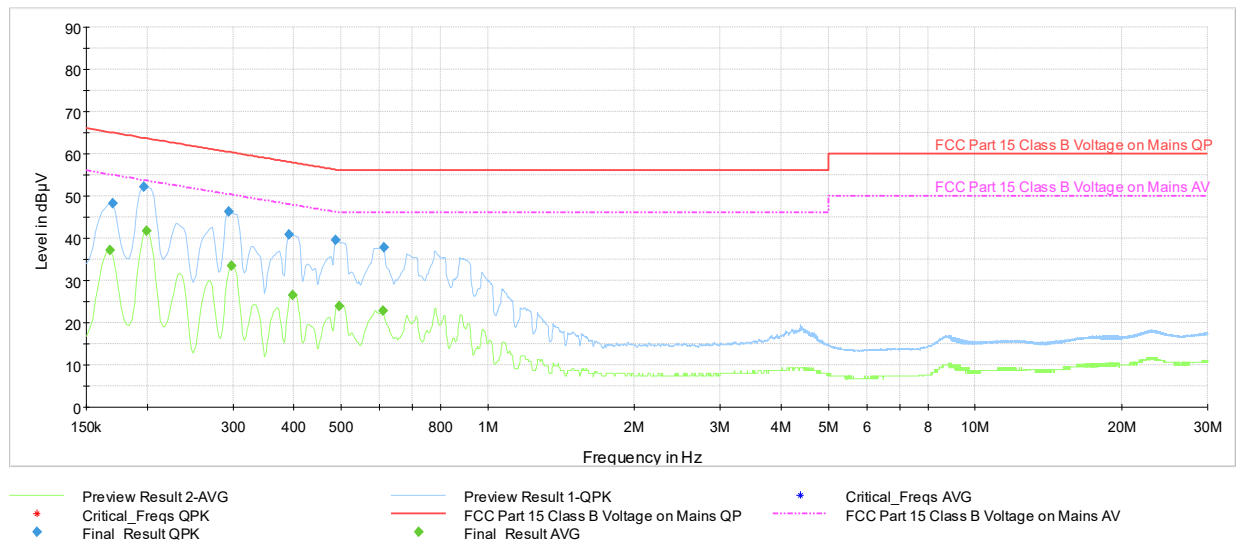

Plot 7-86. Line-Conducted Test Plot- Ch.39 TxBF (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	37.27	55.06	-17.79	N	GND
0.170	FINAL	48.21	—	64.95	-16.74	N	GND
0.197	FINAL	52.13	—	63.73	-11.60	N	GND
0.200	FINAL	—	41.81	53.63	-11.82	N	GND
0.294	FINAL	46.27	—	60.41	-14.14	N	GND
0.299	FINAL	—	33.38	50.28	-16.90	N	GND
0.391	FINAL	40.89	—	58.05	-17.16	N	GND
0.398	FINAL	—	26.56	47.91	-21.35	N	GND
0.488	FINAL	39.51	—	56.21	-16.70	N	GND
0.497	FINAL	—	23.84	46.06	-22.22	N	GND
0.609	FINAL	—	22.75	46.00	-23.25	N	GND
0.611	FINAL	37.87	—	56.00	-18.13	N	GND

Table 7-29. Line-Conducted Test Data- Ch.39 TxBF (N, with AC/DC Adapter)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 94 of 95

8. CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2230** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-10.BCG	Test Dates: 12/10/2019 - 02/15/2020	EUT Type: Tablet Device	Page 95 of 95