




**PCTEST**  
18855 Adams Court, Morgan Hill, CA 95037 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
<http://www.pctest.com>



## MEASUREMENT REPORT

### FCC PART 15.247 / ISSED RSS-247 Bluetooth

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

12/10/2019 - 02/20/2020

**Test Site/Location:**

PCTEST Morgan Hill, CA, USA

**Test Report Serial No.:**

1C1912170055-10.BCG

**FCC ID:**

**BCGA2232**

**IC:**

**579C-A2232**

**APPLICANT:**

**Apple Inc.**

**Application Type:**

Certification

**Model/HVIN:**

A2232, A2233

**EUT Type:**

Tablet Device

**Max. RF Output Power:**

78.524 mW (18.95 dBm) Peak Conducted

**Frequency Range:**

2402 – 2480MHz

**Type of Modulation:**

GFSK,  $\pi/4$ -DQPSK, 8DPSK

**FCC Classification:**

FCC Part 15 Spread Spectrum Transmitter (DSS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**ISED Specification:**

RSS-247 Issue 2

**Test Procedure(s):**

ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President



|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 1 of 95                    |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

## TABLE OF CONTENTS

|       |                                                             |    |
|-------|-------------------------------------------------------------|----|
| 1.0   | INTRODUCTION .....                                          | 3  |
| 1.1   | Scope .....                                                 | 3  |
| 1.2   | PCTEST Test Location .....                                  | 3  |
| 1.3   | Test Facility / Accreditations .....                        | 3  |
| 2.0   | PRODUCT INFORMATION .....                                   | 4  |
| 2.1   | Equipment Description .....                                 | 4  |
| 2.2   | Device Capabilities .....                                   | 4  |
| 2.3   | Antenna Description .....                                   | 6  |
| 2.4   | Test Support Equipment .....                                | 6  |
| 2.5   | Test Configuration .....                                    | 6  |
| 2.6   | Software and Firmware .....                                 | 7  |
| 2.7   | EMI Suppression Device(s)/Modifications .....               | 7  |
| 3.0   | DESCRIPTION OF TESTS .....                                  | 8  |
| 3.1   | Evaluation Procedure .....                                  | 8  |
| 3.2   | AC Line Conducted Emissions .....                           | 8  |
| 3.3   | Radiated Emissions .....                                    | 9  |
| 3.4   | Environmental Conditions .....                              | 9  |
| 4.0   | ANTENNA REQUIREMENTS .....                                  | 10 |
| 5.0   | MEASUREMENT UNCERTAINTY .....                               | 11 |
| 6.0   | TEST EQUIPMENT CALIBRATION DATA .....                       | 12 |
| 7.0   | TEST RESULTS .....                                          | 13 |
| 7.1   | Summary .....                                               | 13 |
| 7.2   | 20dB Bandwidth Measurement .....                            | 14 |
| 7.3   | Output Power Measurement .....                              | 23 |
| 7.3.1 | Peak Output Power Measurement .....                         | 24 |
| 7.3.2 | Average Output Power Measurement .....                      | 26 |
| 7.4   | Band Edge Compliance .....                                  | 28 |
| 7.5   | Carrier Frequency Separation .....                          | 38 |
| 7.6   | Time of Occupancy .....                                     | 43 |
| 7.7   | Number of Hopping Channels .....                            | 47 |
| 7.8   | Conducted Spurious Emissions .....                          | 52 |
| 7.9   | Radiated Spurious Emission Measurements – Above 1GHz .....  | 59 |
| 7.10  | Radiated Restricted Band Edge Measurement .....             | 74 |
| 7.11  | Radiated Spurious Emissions Measurements – Below 1GHz ..... | 86 |
| 7.12  | AC Line Conducted Measurement Data .....                    | 91 |
| 8.    | CONCLUSION .....                                            | 95 |

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 2 of 95                    |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISSED.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 3 of 95                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2232**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
  - A) The hopping sequence is pseudorandom
  - B) All channels are used equally on average
  - C) The receiver input bandwidth equals the transmit bandwidth
  - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

**Test Device Serial No.:** DLXZN00JP57G, DLXZN002P57G

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

This device supports BT Beamforming

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 00  | 2402            |
| :   | :               |
| 39  | 2441            |
| :   | :               |
| 78  | 2480            |

**Table 2-1. Frequency/ Channel Operations**

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 4 of 95                    |

#### Notes:

1. This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Measured Duty Cycles |     |                |        |       |
|----------------------|-----|----------------|--------|-------|
| Bluetooth Mode       |     | Duty Cycle (%) |        |       |
|                      |     | ANT 4a         | ANT 2a | TxBF  |
| GFSK                 | ePA | 100.0          | 100.0  | 100.0 |
|                      | iPA | 100.0          | 100.0  | 100.0 |
| 8DPSK                | ePA | 100.0          | 100.0  | 100.0 |
|                      | iPA | 100.0          | 100.0  | 100.0 |
| $\pi/4$ -DQPSK       | ePA | 100.0          | 100.0  | 100.0 |
|                      | iPA | 100.0          | 100.0  | 100.0 |

**Table 2-2. Measured Duty Cycles**

2. This device supports simultaneous transmission operation, which allows for two transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

| Simultaneous Tx                     | Antenna  |          |          |          |          |          |          |          |
|-------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|
|                                     | 4a       |          |          |          | 2a       |          |          |          |
|                                     | Config 1 | Config 2 | Config 3 | Config 4 | Config 5 | Config 6 | Config 7 | Config 8 |
| WIFI 2.4GHz                         | ✓        | ✓        | ✗        | ✗        | ✓        | ✓        | ✗        | ✗        |
| Bluetooth (1x, EDR, LE, HDR4, HDR8) | ✗        | ✗        | ✓        | ✓        | ✗        | ✗        | ✓        | ✓        |
| LTE Mid Bands                       | ✓        | ✗        | ✓        | ✗        | ✓        | ✗        | ✓        | ✗        |
| LTE High Bands                      | ✗        | ✓        | ✗        | ✓        | ✗        | ✓        | ✗        | ✓        |

**Table 2-3. Simultaneous Tx Configurations**

✓ = Support ; ✗ = NOT Support

#### Worst Case Configuration

| Description               | Bluetooth BDR | LTE            |
|---------------------------|---------------|----------------|
| Antenna                   | 4a            | 4a             |
| Channel                   | 6             | 39750          |
| Operating Frequency (MHz) | 2480          | 2506           |
| Mode/Modulation           | GFSK ePA      | QPSK/1RB/20MHz |

**Table 2-4. Worst Case Configuration**

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 5 of 95                    |

## 2.3 Antenna Description

Following antennas were used for the testing.

| Frequency [GHz] | Antenna Gain (dBi) |        |
|-----------------|--------------------|--------|
|                 | Ant 4a             | Ant 2a |
| 2.4             | -0.5               | 0.6    |

**Table 2-5. Highest Antenna Gain**

**Note:** This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

## 2.4 Test Support Equipment

|   |                   |                 |                        |
|---|-------------------|-----------------|------------------------|
| 1 | Apple MacBook     | Model: A1398    | S/N: C2QKP008F6F3      |
|   | w/ AC/DC Adapter  | Model: A1435    | S/N: C04325505K1F288BG |
| 2 | Apple USB-C Cable | Model: Chimp    | S/N: 304523            |
| 3 | USB-C Cable       | Model: A1997    | S/N: N/A               |
|   | w / AC/DC Adapter | Model: A1720    | S/N: C3D9274B06YLHDAE  |
| 4 | Apple Pencil      | Model: A2051    | S/N: GQXYGSXCJKM9      |
| 5 | DC Power Supply   | Model: KPS3010D | S/N N/A                |

**Table 2-6. Test Support Equipment Used**

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

$\pi/4$ -DQPSK has been investigated and confirmed as not the worst case.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 6 of 95                    |



## 2.6 Software and Firmware

The test was conducted with firmware version 17E228 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 7 of 95                    |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.12. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.35.04.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 8 of 95                    |

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|                                                |                                                                                                                                   |                                   |                                        |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| FCC ID: BCGA2232                               |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                                   | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C1912170055-10.BCG | <b>Test Dates:</b><br>12/10/2019 - 02/20/2020                                                                                     | <b>EUT Type:</b><br>Tablet Device | Page 9 of 95                           |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The EUT complies with the requirement of §15.203.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 10 of 95                   |

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                     | Expanded Uncertainty ( $\pm$ dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.29                             |
| Conducted Disturbance            | 2.48                             |
| Radiated Disturbance (<1GHz)     | 4.15                             |
| Radiated Disturbance (>1GHz)     | 4.70                             |
| Radiated Disturbance (>18GHz)    | 5.01                             |

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 11 of 95                   |

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer         | Model       | Description                                    | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|----------------------|-------------|------------------------------------------------|------------|--------------|------------|---------------|
| Agilent Technologies | N9030A      | 3Hz-44GHz PXA Signal Analyzer                  | 3/13/2019  | Annual       | 3/13/2020  | MY49430244    |
| Anritsu              | ML2496A     | Power Meter                                    | 10/29/2019 | Annual       | 10/29/2020 | 184005        |
| Anritsu              | MA2411B     | Pulse Power Sensor                             | 10/29/2019 | Annual       | 10/29/2020 | 1726261       |
| Anritsu              | MA2411B     | Pulse Power Sensor                             | 10/29/2019 | Annual       | 10/29/2020 | 1726262       |
| ATM                  | 180-442A-KF | 20dB Nominal Gain Horn Antenna                 | 10/29/2019 | Annual       | 10/29/2020 | T058701-02    |
| COM-POWER            | LIN-120A    | LISN                                           | 3/13/2019  | Annual       | 3/13/2020  | 241297        |
| ETS-Lindgren         | 3142E-PA    | Pre-Amplifier (30MHz - 6GHz)                   | 9/19/2019  | Annual       | 9/19/2020  | 213236        |
| ETS-Lindgren         | 3142E       | BiConiLog Antenna (30MHz - 6GHz)               | 8/14/2019  | Annual       | 8/14/2020  | 224569        |
| ETS-Lindgren         | 3117        | Double Ridged Guide Antenna (1-18 GHz)         | 3/12/2019  | Annual       | 3/12/2020  | 205956        |
| Rohde & Schwarz      | ESW26       | EMI Test Receiver                              | 5/21/2019  | Annual       | 5/21/2020  | 101299        |
| Rohde & Schwarz      | ESW44       | EMI Test Receiver                              | 7/27/2019  | Annual       | 7/27/2020  | 101668        |
| Rohde & Schwarz      | TS-PR1840   | Pre-Amplifier (18GHz - 40GHz)                  | 9/19/2019  | Annual       | 9/19/2020  | 100051        |
| Rohde & Schwarz      | TC-TA18     | Cross Polarized Vivaldi Antenna (400MHz-18GHz) | 11/14/2019 | Annual       | 11/14/2020 | 101057        |
| Rohde & Schwarz      | HFH2-Z2     | Loop Antenna                                   | 3/21/2019  | Annual       | 3/21/2020  | 100519        |

**Table 6-1. Annual Test Equipment Calibration Schedule**

### Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 12 of 95                   |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2232  
 Method/System: Frequency Hopping Spread Spectrum (FHSS)  
 Number of Channels: 79

| FCC Part Section(s) | RSS Section(s)   | Test Description                                                              | Test Limit                                                                                      | Test Condition | Test Result | Reference                               |
|---------------------|------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------|-------------|-----------------------------------------|
| 15.247(a)(1)(iii)   | RSS-247 [5.1(a)] | 20dB Bandwidth                                                                | N/A                                                                                             | CONDUCTED      | PASS        | Section 7.2                             |
| 15.247(b)(1)        | RSS-247 [5.4(b)] | Peak Transmitter Output Power                                                 | < 1 Watt if $\geq 75$ non-overlapping channels used                                             |                | PASS        | Section 7.3                             |
| 15.247(a)(1)        | RSS-247 [5.1(b)] | Channel Separation                                                            | > 2/3 of 20 dB BW for systems with Output Power < 125mW                                         |                | PASS        | Section 7.5                             |
| 15.247(a)(1)(iii)   | RSS-247 [5.1(d)] | Number of Channels                                                            | > 15 Channels                                                                                   |                | PASS        | Section 7.7                             |
| 15.247(a)(1)(iii)   | RSS-247 [5.1(d)] | Time of Occupancy                                                             | < 0.4 sec in 31.6 sec period                                                                    |                | PASS        | Section 7.6                             |
| 15.247(d)           | RSS-247 [5.5]    | Band Edge / Out-of-Band Emissions                                             | Conducted > 20dBc                                                                               |                | PASS        | Section 7.4, Section 7.8                |
| 15.205<br>15.209    | RSS-Gen [8.9]    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits) | RADIATED       | PASS        | Section 7.9, Section 7.10, Section 7.11 |
| 15.207              | RSS-Gen [8.8]    | AC Conducted Emissions 150kHz – 30MHz                                         | < FCC 15.207 limits (RSS-Gen [8.8] limits)                                                      | LINE CONDUCTED | PASS        | Section 7.12                            |

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "BT Auto," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.0.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 13 of 95                   |

## 7.2 20dB Bandwidth Measurement

§15.247 (a.1.iii); RSS-247 [5.1(a)]

### Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

### Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 20$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW  $\geq 3 \times$  RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

Both power schemes were investigated, and only the worst case is reported.


|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 14 of 95                   |

# Ant 4a


| Frequency [MHz] | Data Rate [Mbps] | Mod.  | Power Scheme | Channel No. | 20dB Bandwidth Test Results [kHz] |
|-----------------|------------------|-------|--------------|-------------|-----------------------------------|
| 2402            | 1.0              | GFSK  | ePA          | 0           | 952.50                            |
| 2441            | 1.0              | GFSK  | ePA          | 39          | 951.50                            |
| 2480            | 1.0              | GFSK  | ePA          | 78          | 951.80                            |
| 2402            | 3.0              | 8DPSK | ePA          | 0           | 1384.00                           |
| 2441            | 3.0              | 8DPSK | ePA          | 39          | 1385.00                           |
| 2480            | 3.0              | 8DPSK | ePA          | 78          | 1388.00                           |

**Table 7-2. Conducted 20dB Bandwidth Measurements Ant 4a**

|                                                |                                                                                     |                                               |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2232                        |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C1912170055-10.BCG | <b>Test Dates:</b><br>12/10/2019 - 02/20/2020                                       | <b>EUT Type:</b><br>Tablet Device             | Page 15 of 95                          |

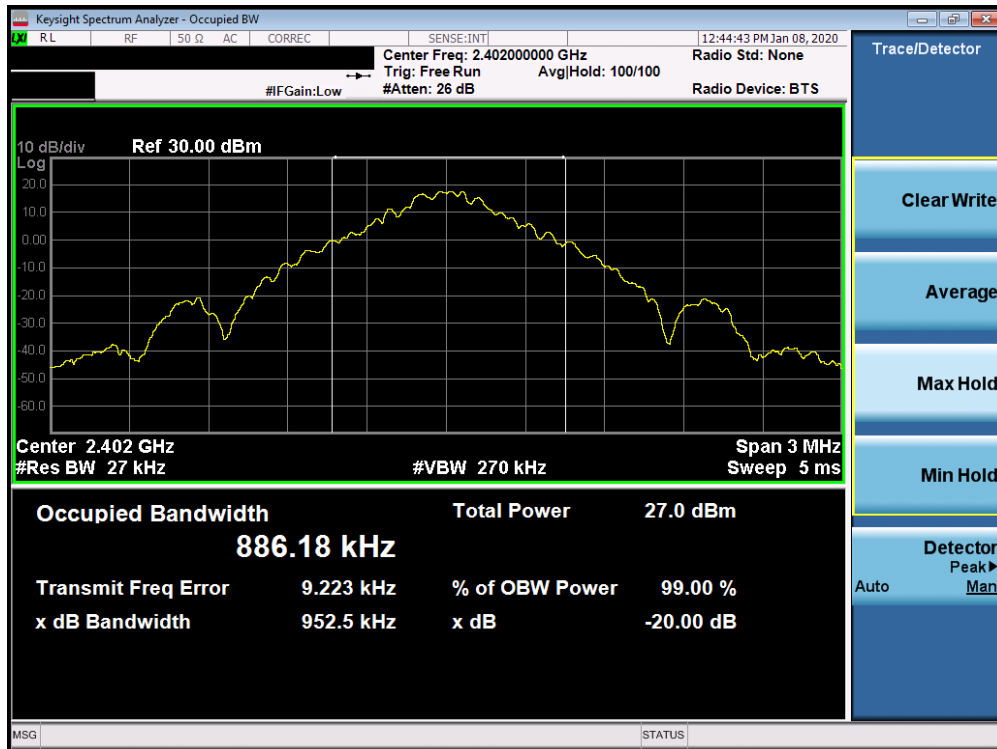


Plot 7-1. 20dB Bandwidth Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 0)

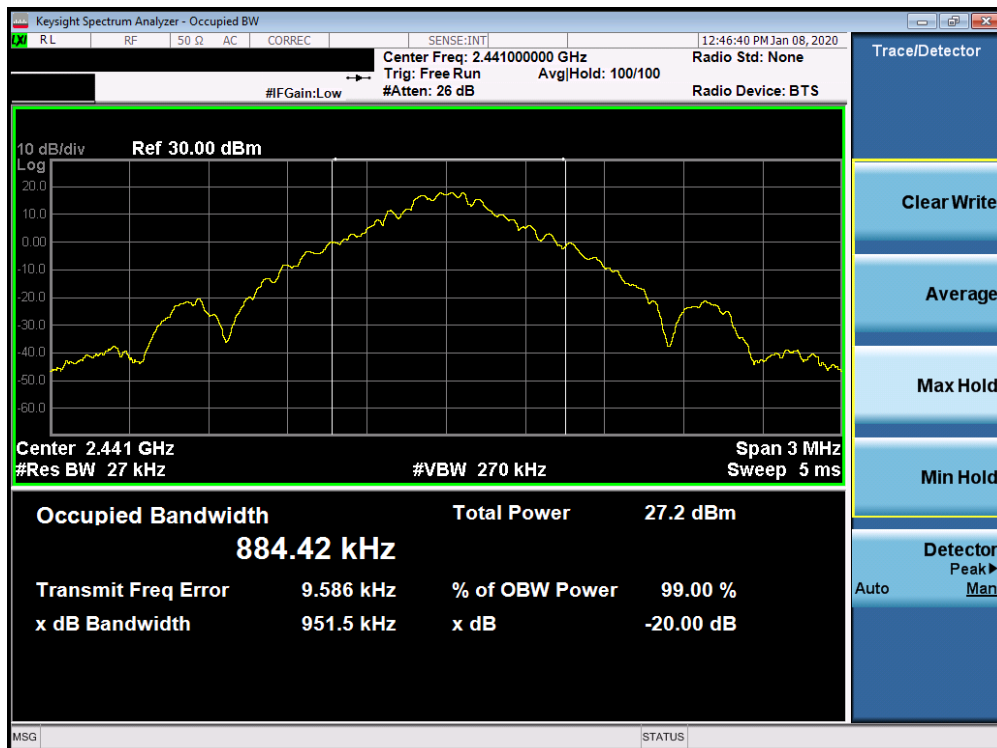


Plot 7-2. 20dB Bandwidth Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 39)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 16 of 95                   |

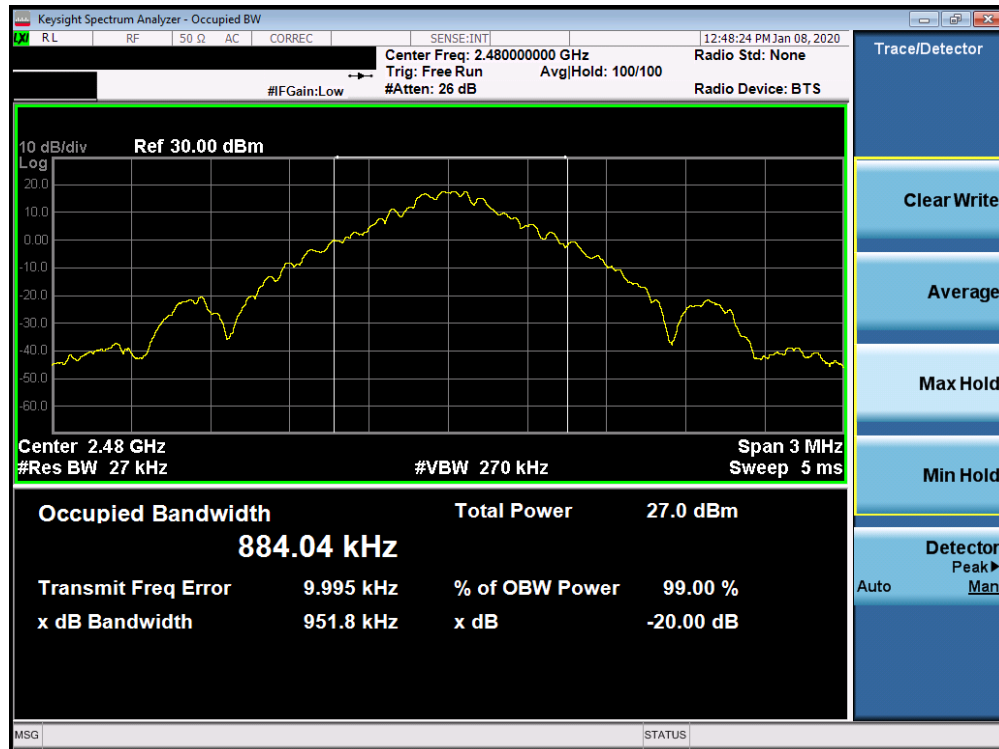


Plot 7-3. 20dB Bandwidth Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 78)

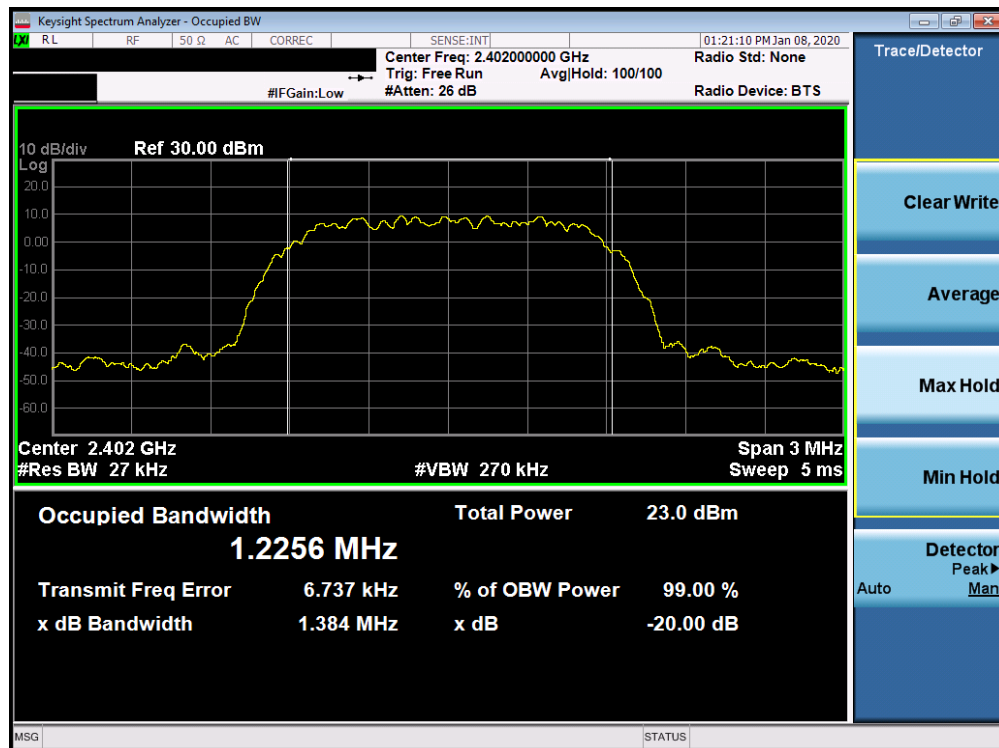


Plot 7-4. 20dB Bandwidth Plot Ant 4a (Bluetooth, 8DPSK, ePA – Ch. 0)

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 17 of 95                   |

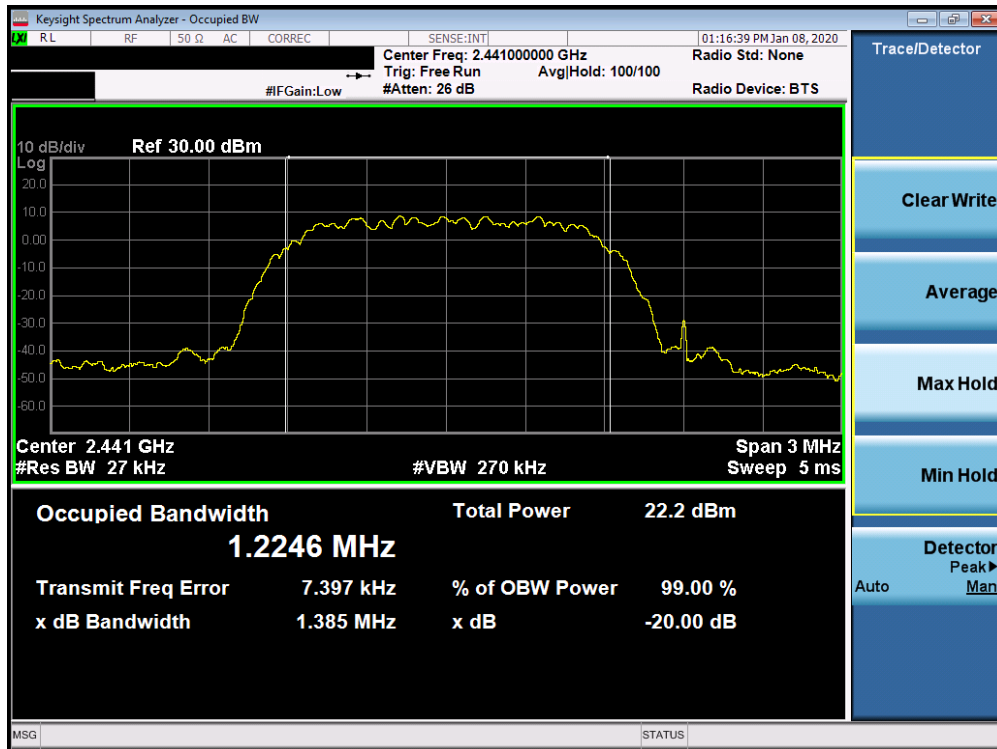

Plot 7-5. 20dB Bandwidth Plot Ant 4a (Bluetooth, 8DPSK, ePA – Ch. 39)

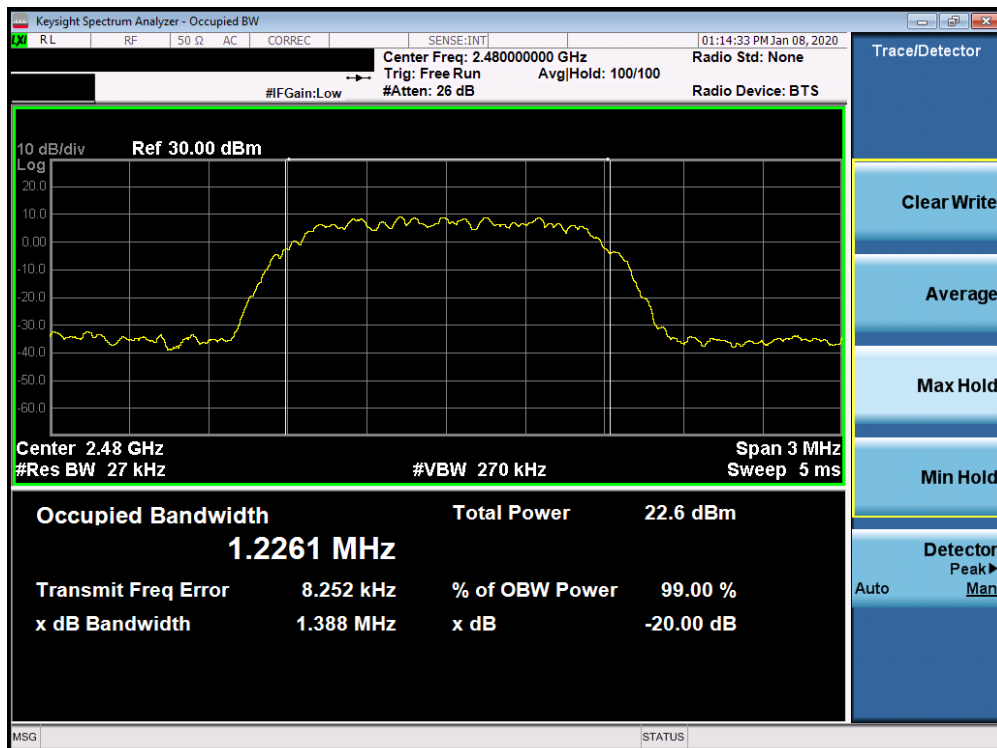

Plot 7-6. 20dB Bandwidth Plot Ant 4a (Bluetooth, 8DPSK, ePA – Ch. 78)


|                                         |                                                                                                                                  |                            |                                 |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                           | EUT Type:<br>Tablet Device | Page 18 of 95                   |

## Ant 2a


| Frequency [MHz] | Data Rate [Mbps] | Mod.  | Power Scheme | Channel No. | 20dB Bandwidth Test Results [kHz] |
|-----------------|------------------|-------|--------------|-------------|-----------------------------------|
| 2402            | 1.0              | GFSK  | ePA          | 0           | 952.80                            |
| 2441            | 1.0              | GFSK  | ePA          | 39          | 952.00                            |
| 2480            | 1.0              | GFSK  | ePA          | 78          | 952.20                            |
| 2402            | 3.0              | 8DPSK | ePA          | 0           | 1386.00                           |
| 2441            | 3.0              | 8DPSK | ePA          | 39          | 1385.00                           |
| 2480            | 3.0              | 8DPSK | ePA          | 78          | 1387.00                           |

**Table 7-3. Conducted 20dB Bandwidth Measurements Ant 2a**

|                                                |                                                                                     |                                               |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2232                        |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C1912170055-10.BCG | <b>Test Dates:</b><br>12/10/2019 - 02/20/2020                                       | <b>EUT Type:</b><br>Tablet Device             | Page 19 of 95                          |

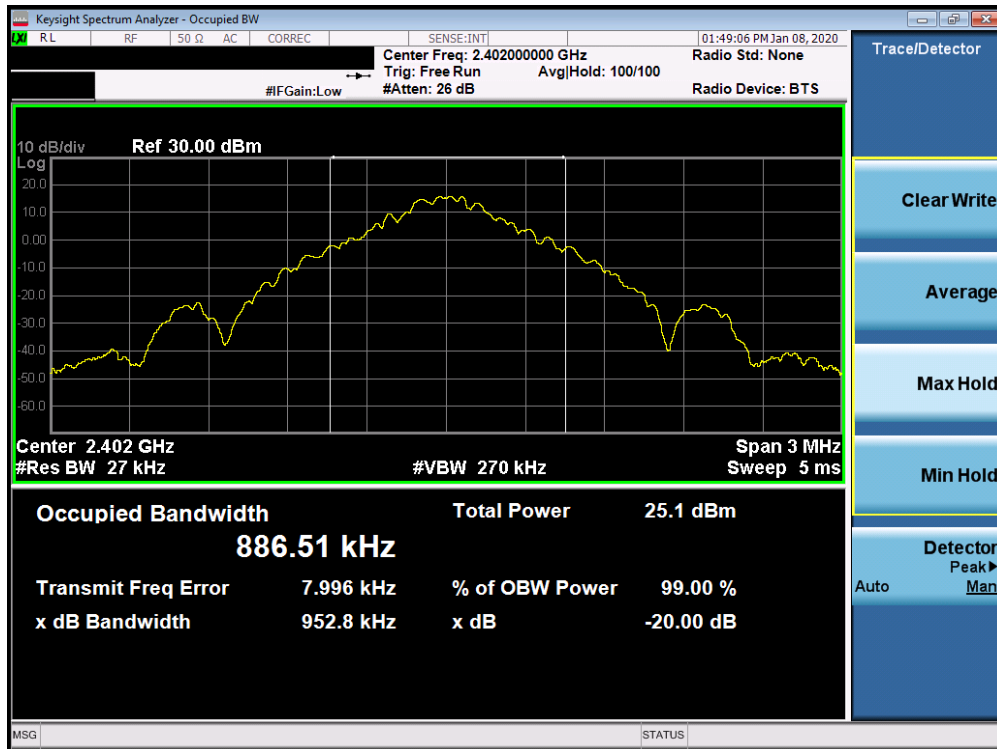


Plot 7-7. 20dB Bandwidth Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 0)

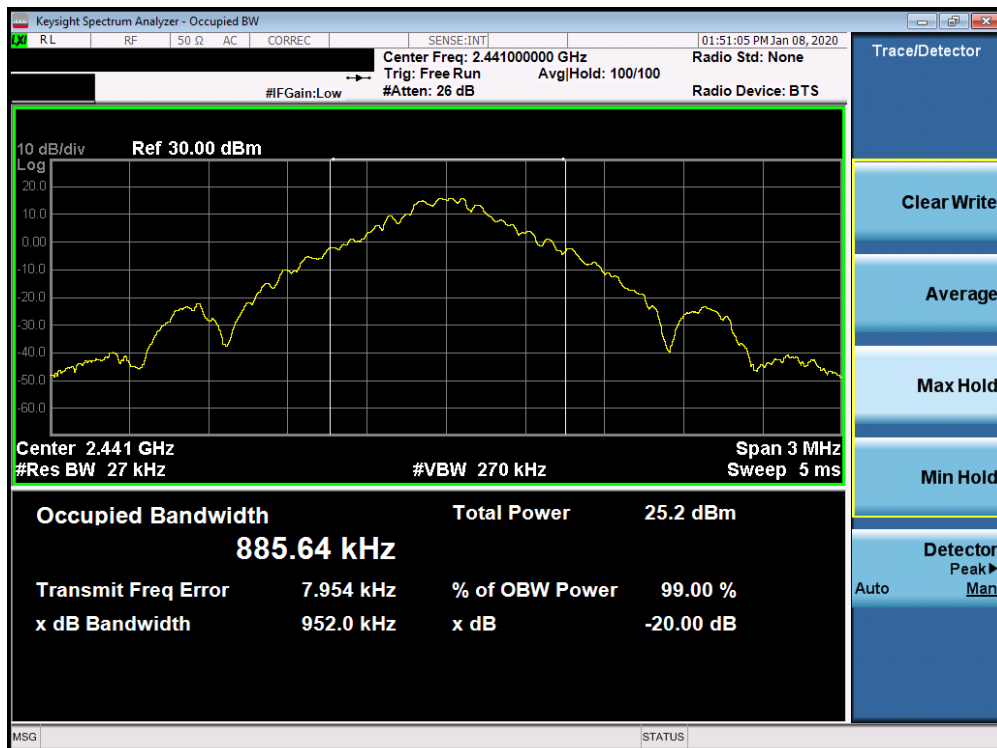


Plot 7-8. 20dB Bandwidth Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 39)

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 20 of 95                   |

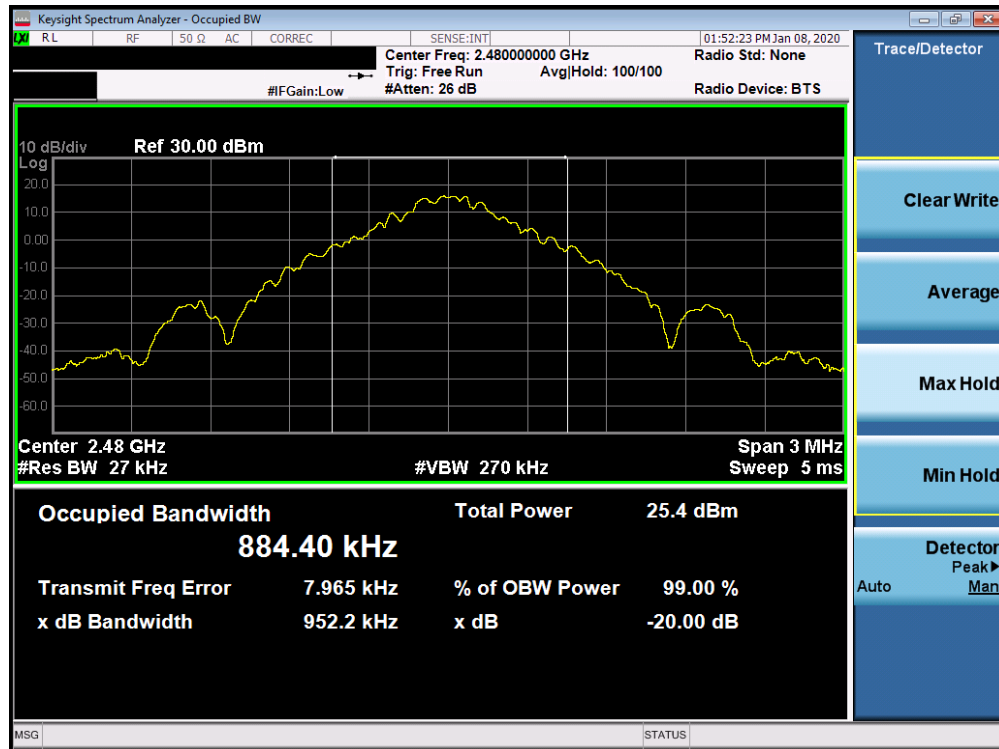


Plot 7-9. 20dB Bandwidth Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 78)

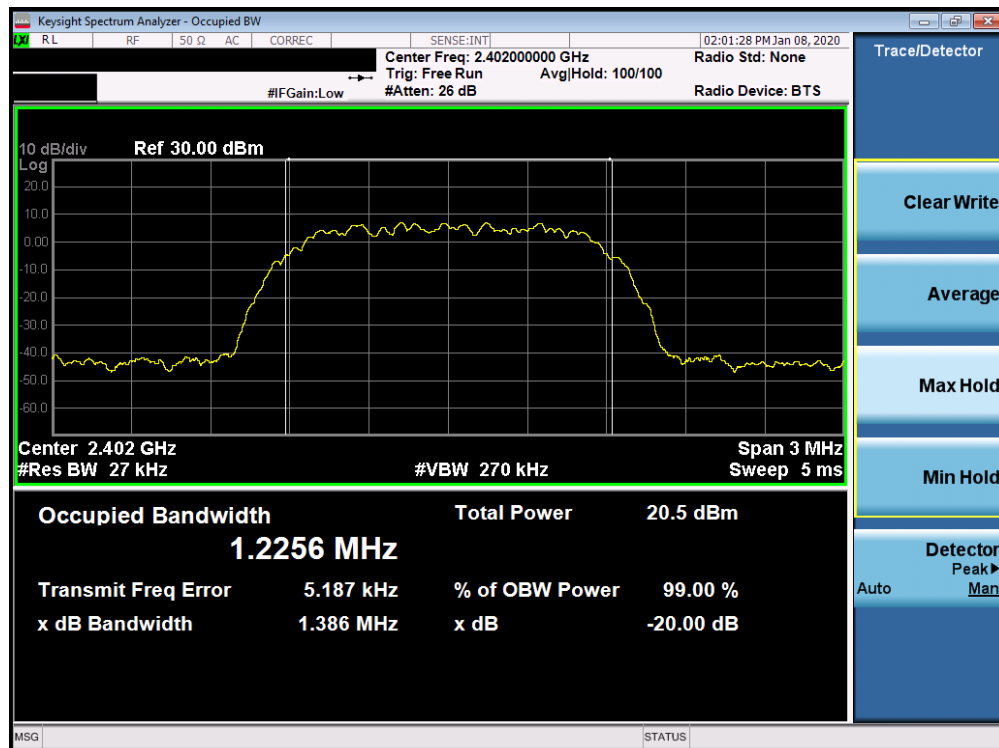


Plot 7-10. 20dB Bandwidth Plot Ant 2a (Bluetooth, 8DPSK, ePA – Ch. 0)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 21 of 95                   |

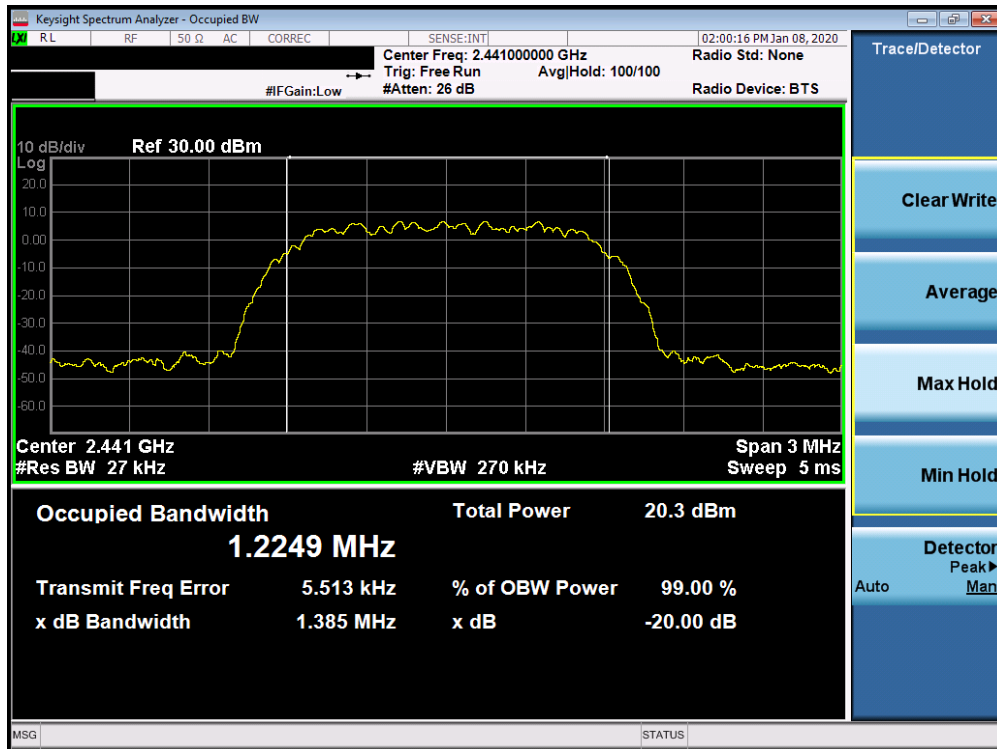

Plot 7-11. 20dB Bandwidth Plot Ant 2a (Bluetooth, 8DPSK, ePA – Ch. 39)

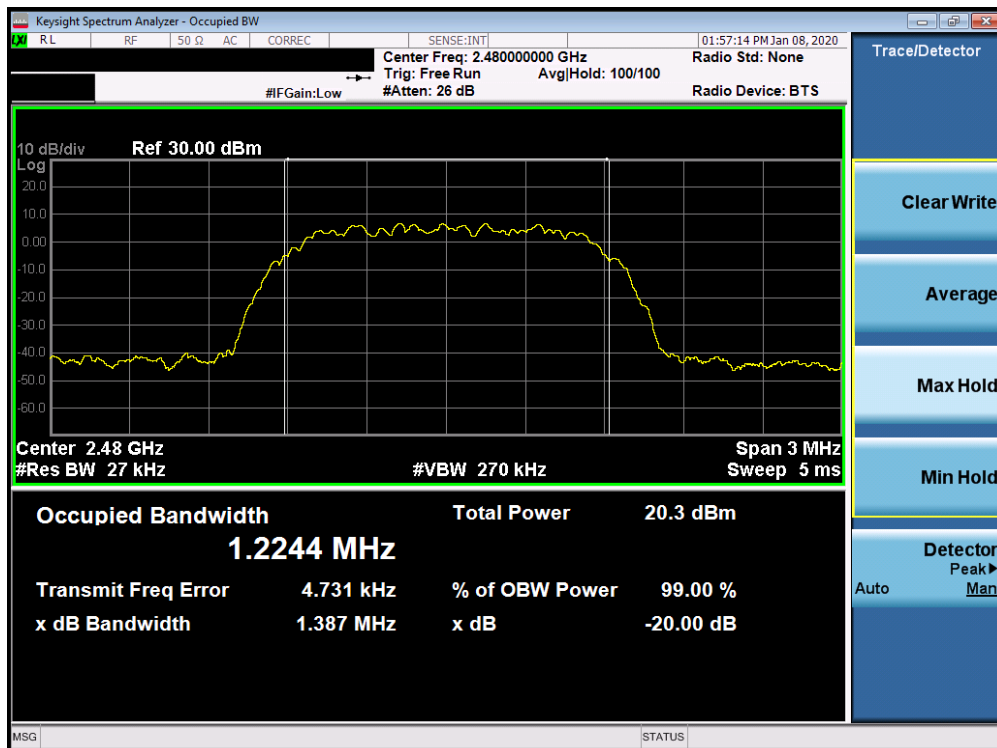

Plot 7-12. 20dB Bandwidth Plot Ant 2a (Bluetooth, 8DPSK, ePA – Ch. 78)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 22 of 95                   |

## 7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(b)]

### Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. Peak and Average power measurements are performed using a broadband power meter with a pulse sensor.

*The maximum permissible output power is 1 Watt.*

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

### Test Settings

#### Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

#### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement**

### Note

1. This unit was tested with all possible data rates and the highest peak power is reported with the unit transmitting at GFSK and 8DPSK.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 23 of 95                   |

### 7.3.1 Peak Output Power Measurement

| Frequency [MHz] | Data Rate [Mbps] | Mod.  | Power Scheme | Channel No. | Peak Conducted Power |        | Ant. Gain [dBi] | EIRP [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|------------------|-------|--------------|-------------|----------------------|--------|-----------------|------------|-------------|-------------|
|                 |                  |       |              |             | [dBm]                | [mW]   |                 |            |             |             |
| 2402            | 1.0              | GFSK  | ePA          | 0           | 15.17                | 32.885 | -0.50           | 14.67      | 36.02       | -21.35      |
| 2441            | 1.0              | GFSK  | ePA          | 39          | 15.15                | 32.734 | -0.50           | 14.65      | 36.02       | -21.37      |
| 2480            | 1.0              | GFSK  | ePA          | 78          | 15.14                | 32.659 | -0.50           | 14.64      | 36.02       | -21.38      |
| 2402            | 1.0              | GFSK  | iPA          | 0           | 11.76                | 14.997 | -0.50           | 11.26      | 36.02       | -24.76      |
| 2441            | 1.0              | GFSK  | iPA          | 39          | 11.80                | 15.136 | -0.50           | 11.30      | 36.02       | -24.72      |
| 2480            | 1.0              | GFSK  | iPA          | 78          | 11.70                | 14.791 | -0.50           | 11.20      | 36.02       | -24.82      |
| 2402            | 3.0              | 8DPSK | ePA          | 0           | 16.56                | 45.290 | -0.50           | 16.06      | 36.02       | -19.96      |
| 2441            | 3.0              | 8DPSK | ePA          | 39          | 16.52                | 44.875 | -0.50           | 16.02      | 36.02       | -20.00      |
| 2480            | 3.0              | 8DPSK | ePA          | 78          | 16.39                | 43.551 | -0.50           | 15.89      | 36.02       | -20.13      |
| 2402            | 3.0              | 8DPSK | iPA          | 0           | 10.15                | 10.351 | -0.50           | 9.65       | 36.02       | -26.37      |
| 2441            | 3.0              | 8DPSK | iPA          | 39          | 10.21                | 10.495 | -0.50           | 9.71       | 36.02       | -26.31      |
| 2480            | 3.0              | 8DPSK | iPA          | 78          | 10.17                | 10.399 | -0.50           | 9.67       | 36.02       | -26.35      |

**Table 7-4. Ant 4a Peak Conducted Output Power Measurements**

| Frequency [MHz] | Data Rate [Mbps] | Mod.  | Power Scheme | Channel No. | Peak Conducted Power |        | Ant. Gain [dBi] | EIRP [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|------------------|-------|--------------|-------------|----------------------|--------|-----------------|------------|-------------|-------------|
|                 |                  |       |              |             | [dBm]                | [mW]   |                 |            |             |             |
| 2402            | 1.0              | GFSK  | ePA          | 0           | 14.65                | 29.174 | 0.60            | 15.25      | 36.02       | -20.77      |
| 2441            | 1.0              | GFSK  | ePA          | 39          | 14.47                | 27.990 | 0.60            | 15.07      | 36.02       | -20.95      |
| 2480            | 1.0              | GFSK  | ePA          | 78          | 14.56                | 28.576 | 0.60            | 15.16      | 36.02       | -20.86      |
| 2402            | 1.0              | GFSK  | iPA          | 0           | 10.03                | 10.069 | 0.60            | 10.63      | 36.02       | -25.39      |
| 2441            | 1.0              | GFSK  | iPA          | 39          | 10.40                | 10.965 | 0.60            | 11.00      | 36.02       | -25.02      |
| 2480            | 1.0              | GFSK  | iPA          | 78          | 9.96                 | 9.908  | 0.60            | 10.56      | 36.02       | -25.46      |
| 2402            | 3.0              | 8DPSK | ePA          | 0           | 14.09                | 25.645 | 0.60            | 14.69      | 36.02       | -21.33      |
| 2441            | 3.0              | 8DPSK | ePA          | 39          | 13.83                | 24.155 | 0.60            | 14.43      | 36.02       | -21.59      |
| 2480            | 3.0              | 8DPSK | ePA          | 78          | 13.94                | 24.774 | 0.60            | 14.54      | 36.02       | -21.48      |
| 2402            | 3.0              | 8DPSK | iPA          | 0           | 8.18                 | 6.577  | 0.60            | 8.78       | 36.02       | -27.24      |
| 2441            | 3.0              | 8DPSK | iPA          | 39          | 8.33                 | 6.808  | 0.60            | 8.93       | 36.02       | -27.09      |
| 2480            | 3.0              | 8DPSK | iPA          | 78          | 8.08                 | 6.427  | 0.60            | 8.68       | 36.02       | -27.34      |

**Table 7-5. Ant 2a Peak Conducted Output Power Measurements**

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 24 of 95                   |

| Frequency<br>[MHz] | Data<br>Rate<br>[Mbps] | Mod.  | Power<br>Scheme | Channel<br>No. | Peak Conducted Power |        |        |        |        |        | Directional<br>Ant. Gain<br>[dBi] | EIRP<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|------------------------|-------|-----------------|----------------|----------------------|--------|--------|--------|--------|--------|-----------------------------------|---------------|----------------|----------------|
|                    |                        |       |                 |                | Ant 4a               |        | Ant 2a |        | Summed |        |                                   |               |                |                |
|                    |                        |       |                 |                | [dBm]                | [mW]   | [dBm]  | [mW]   | [dBm]  | [mW]   |                                   |               |                |                |
| 2402               | 1.0                    | GFSK  | ePA             | 0              | 15.01                | 31.696 | 14.85  | 30.549 | 17.94  | 62.230 | 3.08                              | 21.02         | 36.02          | -15.00         |
| 2441               | 1.0                    | GFSK  | ePA             | 39             | 14.90                | 30.903 | 14.53  | 28.379 | 17.73  | 59.293 | 3.08                              | 20.81         | 36.02          | -15.21         |
| 2480               | 1.0                    | GFSK  | ePA             | 78             | 15.29                | 33.806 | 14.68  | 29.376 | 18.01  | 63.241 | 3.08                              | 21.09         | 36.02          | -14.93         |
| 2402               | 1.0                    | GFSK  | iPA             | 0              | 11.64                | 14.588 | 10.95  | 12.445 | 14.32  | 27.040 | 3.08                              | 17.40         | 36.02          | -18.62         |
| 2441               | 1.0                    | GFSK  | iPA             | 39             | 11.49                | 14.093 | 11.01  | 12.618 | 14.27  | 26.730 | 3.08                              | 17.35         | 36.02          | -18.67         |
| 2480               | 1.0                    | GFSK  | iPA             | 78             | 11.64                | 14.588 | 10.62  | 11.535 | 14.17  | 26.122 | 3.08                              | 17.25         | 36.02          | -18.77         |
| 2402               | 3.0                    | 8DPSK | ePA             | 0              | 16.52                | 44.875 | 14.90  | 30.903 | 18.80  | 75.858 | 3.08                              | 21.88         | 36.02          | -14.14         |
| 2441               | 3.0                    | 8DPSK | ePA             | 39             | 16.40                | 43.652 | 15.42  | 34.834 | 18.95  | 78.524 | 3.08                              | 22.03         | 36.02          | -13.99         |
| 2480               | 3.0                    | 8DPSK | ePA             | 78             | 16.50                | 44.668 | 15.11  | 32.434 | 18.87  | 77.090 | 3.08                              | 21.95         | 36.02          | -14.07         |
| 2402               | 3.0                    | 8DPSK | iPA             | 0              | 10.17                | 10.399 | 9.07   | 8.072  | 12.67  | 18.493 | 3.08                              | 15.75         | 36.02          | -20.27         |
| 2441               | 3.0                    | 8DPSK | iPA             | 39             | 10.28                | 10.666 | 9.02   | 7.980  | 12.71  | 18.664 | 3.08                              | 15.79         | 36.02          | -20.23         |
| 2480               | 3.0                    | 8DPSK | iPA             | 78             | 9.96                 | 9.908  | 8.16   | 6.546  | 12.16  | 16.444 | 3.08                              | 15.24         | 36.02          | -20.78         |

**Table 7-6. TxBF Peak Conducted Output Power Measurements**

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 25 of 95                   |

### 7.3.2 Average Output Power Measurement

| Frequency [MHz] | Data Rate [Mbps] | Mod.  | Power Scheme | Channel No. | Avg Conducted Power |        | Ant. Gain [dBi] | EIRP [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|------------------|-------|--------------|-------------|---------------------|--------|-----------------|------------|-------------|-------------|
|                 |                  |       |              |             | [dBm]               | [mW]   |                 |            |             |             |
| 2402            | 1.0              | GFSK  | ePA          | 0           | 14.97               | 31.405 | -0.50           | 14.47      | 36.02       | -21.55      |
| 2441            | 1.0              | GFSK  | ePA          | 39          | 14.98               | 31.477 | -0.50           | 14.48      | 36.02       | -21.54      |
| 2480            | 1.0              | GFSK  | ePA          | 78          | 14.96               | 31.333 | -0.50           | 14.46      | 36.02       | -21.56      |
| 2402            | 1.0              | GFSK  | iPA          | 0           | 11.50               | 14.125 | -0.50           | 11.00      | 36.02       | -25.02      |
| 2441            | 1.0              | GFSK  | iPA          | 39          | 11.50               | 14.125 | -0.50           | 11.00      | 36.02       | -25.02      |
| 2480            | 1.0              | GFSK  | iPA          | 78          | 11.49               | 14.093 | -0.50           | 10.99      | 36.02       | -25.03      |
| 2402            | 3.0              | 8DPSK | ePA          | 0           | 13.47               | 22.233 | -0.50           | 12.97      | 36.02       | -23.05      |
| 2441            | 3.0              | 8DPSK | ePA          | 39          | 13.48               | 22.284 | -0.50           | 12.98      | 36.02       | -23.04      |
| 2480            | 3.0              | 8DPSK | ePA          | 78          | 13.41               | 21.928 | -0.50           | 12.91      | 36.02       | -23.11      |
| 2402            | 3.0              | 8DPSK | iPA          | 0           | 7.49                | 5.610  | -0.50           | 6.99       | 36.02       | -29.03      |
| 2441            | 3.0              | 8DPSK | iPA          | 39          | 7.46                | 5.572  | -0.50           | 6.96       | 36.02       | -29.06      |
| 2480            | 3.0              | 8DPSK | iPA          | 78          | 7.50                | 5.623  | -0.50           | 7.00       | 36.02       | -29.02      |

**Table 7-7. Ant 4a Average Conducted Output Power Measurements**

| Frequency [MHz] | Data Rate [Mbps] | Mod.  | Power Scheme | Channel No. | Avg Conducted Power |        | Ant. Gain [dBi] | EIRP [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|------------------|-------|--------------|-------------|---------------------|--------|-----------------|------------|-------------|-------------|
|                 |                  |       |              |             | [dBm]               | [mW]   |                 |            |             |             |
| 2402            | 1.0              | GFSK  | ePA          | 0           | 14.48               | 28.054 | 0.60            | 15.08      | 36.02       | -20.94      |
| 2441            | 1.0              | GFSK  | ePA          | 39          | 14.30               | 26.915 | 0.60            | 14.90      | 36.02       | -21.12      |
| 2480            | 1.0              | GFSK  | ePA          | 78          | 14.37               | 27.353 | 0.60            | 14.97      | 36.02       | -21.05      |
| 2402            | 1.0              | GFSK  | iPA          | 0           | 9.80                | 9.550  | 0.60            | 10.40      | 36.02       | -25.62      |
| 2441            | 1.0              | GFSK  | iPA          | 39          | 10.00               | 10.000 | 0.60            | 10.60      | 36.02       | -25.42      |
| 2480            | 1.0              | GFSK  | iPA          | 78          | 9.73                | 9.397  | 0.60            | 10.33      | 36.02       | -25.69      |
| 2402            | 3.0              | 8DPSK | ePA          | 0           | 11.00               | 12.589 | 0.60            | 11.60      | 36.02       | -24.42      |
| 2441            | 3.0              | 8DPSK | ePA          | 39          | 10.90               | 12.303 | 0.60            | 11.50      | 36.02       | -24.52      |
| 2480            | 3.0              | 8DPSK | ePA          | 78          | 10.99               | 12.560 | 0.60            | 11.59      | 36.02       | -24.43      |
| 2402            | 3.0              | 8DPSK | iPA          | 0           | 5.50                | 3.548  | 0.60            | 6.10       | 36.02       | -29.92      |
| 2441            | 3.0              | 8DPSK | iPA          | 39          | 5.50                | 3.548  | 0.60            | 6.10       | 36.02       | -29.92      |
| 2480            | 3.0              | 8DPSK | iPA          | 78          | 5.49                | 3.540  | 0.60            | 6.09       | 36.02       | -29.93      |

**Table 7-8. Ant 2a Average Conducted Output Power Measurements**

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 26 of 95                   |

| Frequency<br>[MHz] | Data<br>Rate<br>[Mbps] | Mod.  | Power<br>Scheme | Channel<br>No. | Average Conducted Power |        |        |        |        |        | Directional<br>Ant. Gain<br>[dBi] | EIRP<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|--------------------|------------------------|-------|-----------------|----------------|-------------------------|--------|--------|--------|--------|--------|-----------------------------------|---------------|----------------|----------------|
|                    |                        |       |                 |                | Ant 4a                  |        | Ant 2a |        | Summed |        |                                   |               |                |                |
|                    |                        |       |                 |                | [dBm]                   | [mW]   | [dBm]  | [mW]   | [dBm]  | [mW]   |                                   |               |                |                |
| 2402               | 1.0                    | GFSK  | ePA             | 0              | 14.81                   | 30.269 | 14.44  | 27.797 | 17.64  | 58.076 | 3.08                              | 20.72         | 36.02          | -15.30         |
| 2441               | 1.0                    | GFSK  | ePA             | 39             | 14.77                   | 29.992 | 14.38  | 27.416 | 17.59  | 57.412 | 3.08                              | 20.67         | 36.02          | -15.35         |
| 2480               | 1.0                    | GFSK  | ePA             | 78             | 14.93                   | 31.117 | 14.48  | 28.054 | 17.72  | 59.156 | 3.08                              | 20.80         | 36.02          | -15.22         |
| 2402               | 1.0                    | GFSK  | iPA             | 0              | 11.45                   | 13.964 | 9.81   | 9.572  | 13.72  | 23.550 | 3.08                              | 16.80         | 36.02          | -19.22         |
| 2441               | 1.0                    | GFSK  | iPA             | 39             | 11.27                   | 13.397 | 9.82   | 9.594  | 13.62  | 23.014 | 3.08                              | 16.70         | 36.02          | -19.32         |
| 2480               | 1.0                    | GFSK  | iPA             | 78             | 11.50                   | 14.125 | 10.00  | 10.000 | 13.82  | 24.099 | 3.08                              | 16.90         | 36.02          | -19.12         |
| 2402               | 3.0                    | 8DPSK | ePA             | 0              | 13.49                   | 22.336 | 10.99  | 12.560 | 15.43  | 34.914 | 3.08                              | 18.51         | 36.02          | -17.51         |
| 2441               | 3.0                    | 8DPSK | ePA             | 39             | 13.44                   | 22.080 | 10.72  | 11.803 | 15.30  | 33.884 | 3.08                              | 18.38         | 36.02          | -17.64         |
| 2480               | 3.0                    | 8DPSK | ePA             | 78             | 13.50                   | 22.387 | 10.66  | 11.641 | 15.32  | 34.041 | 3.08                              | 18.40         | 36.02          | -17.62         |
| 2402               | 3.0                    | 8DPSK | iPA             | 0              | 7.49                    | 5.610  | 5.42   | 3.483  | 9.59   | 9.099  | 3.08                              | 12.67         | 36.02          | -23.35         |
| 2441               | 3.0                    | 8DPSK | iPA             | 39             | 7.45                    | 5.559  | 5.45   | 3.508  | 9.57   | 9.057  | 3.08                              | 12.65         | 36.02          | -23.37         |
| 2480               | 3.0                    | 8DPSK | iPA             | 78             | 7.44                    | 5.546  | 5.50   | 3.548  | 9.59   | 9.099  | 3.08                              | 12.67         | 36.02          | -23.35         |

**Table 7-9. TxBF Average Conducted Output Power Measurements**

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 27 of 95                   |



## 7.4 Band Edge Compliance

§15.247 (d); RSS-247 [5.5]

### Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. ***The maximum permissible out-of-band emission level is 20 dBc.***

### Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

|                                         |                                                                                                                           |                            |                                 |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  MEASUREMENT REPORT<br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                    | EUT Type:<br>Tablet Device | Page 28 of 95                   |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-3. Test Instrument & Measurement Setup**

## Test Notes


1. Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.
2. Both power schemes were investigated and only the worst case is reported.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 29 of 95                   |

# Ant 4a

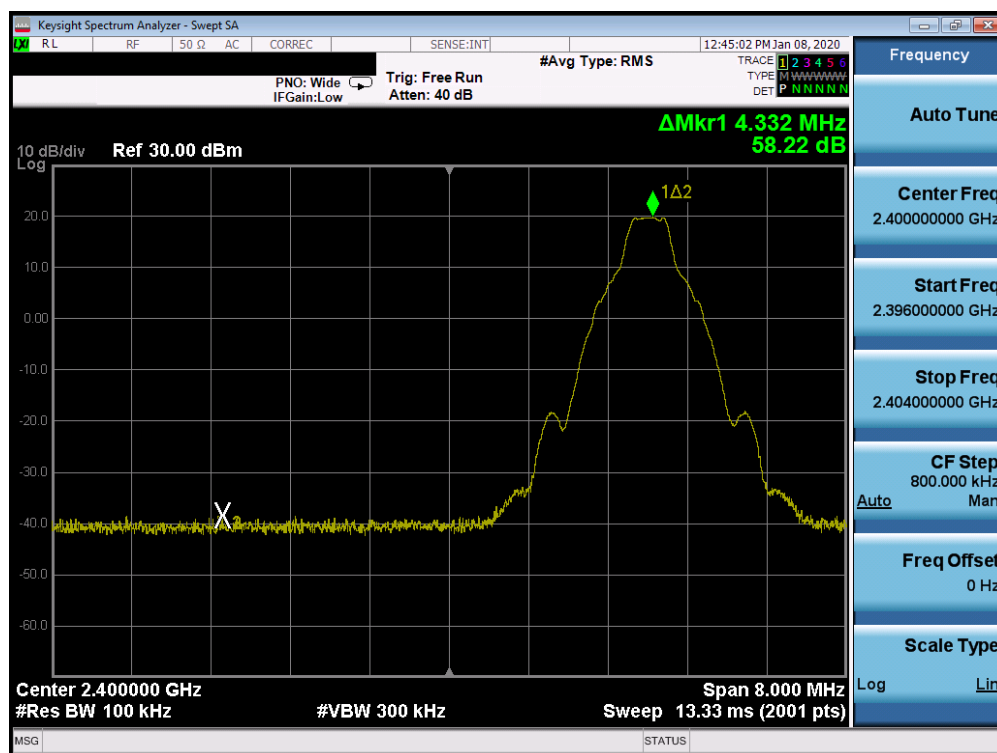


Plot 7-13. Band Edge Plot Ant 4a (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

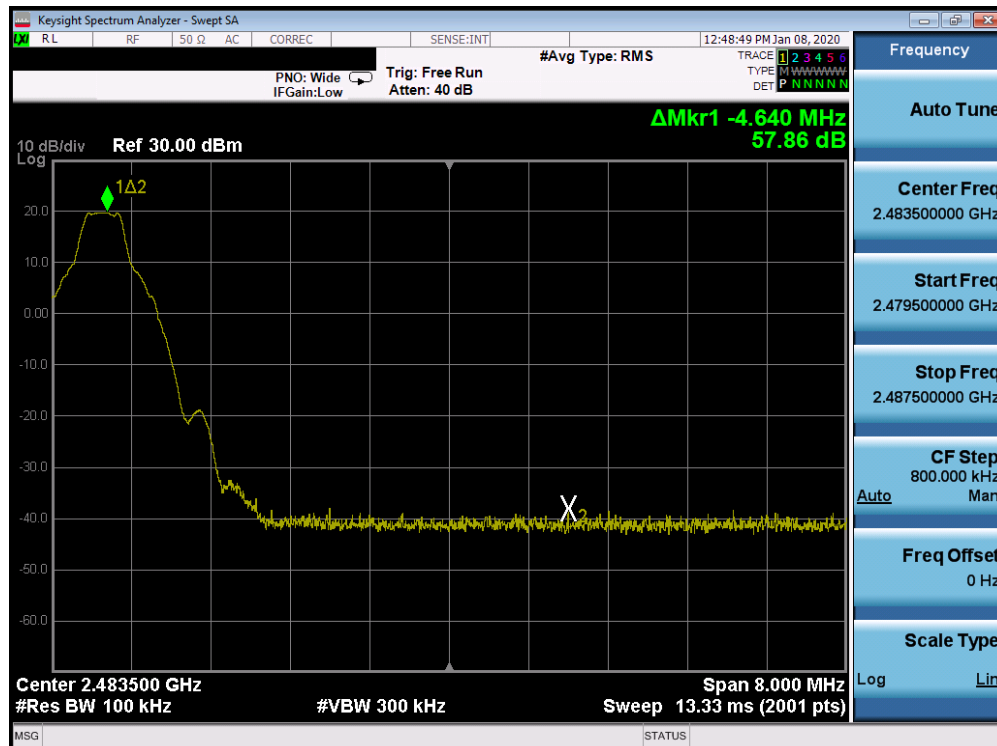


Plot 7-14. Band Edge Plot Ant 4a (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 30 of 95                   |

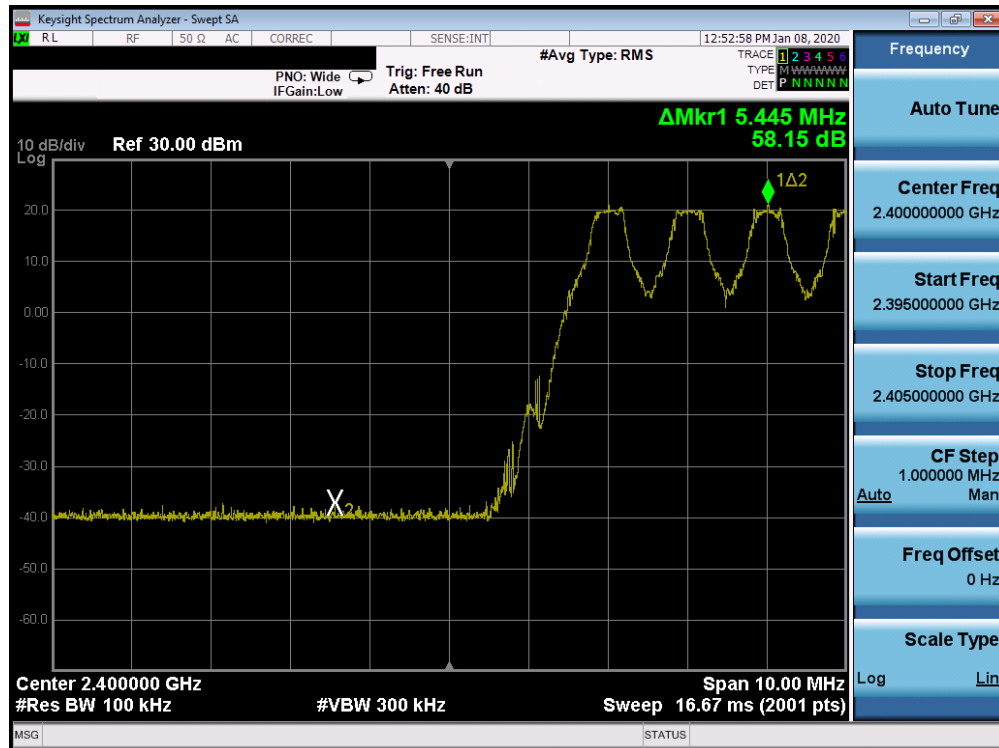


Plot 7-15. Band Edge Plot Ant 4a (Bluetooth with Hopping Enabled, GFSK, ePA)

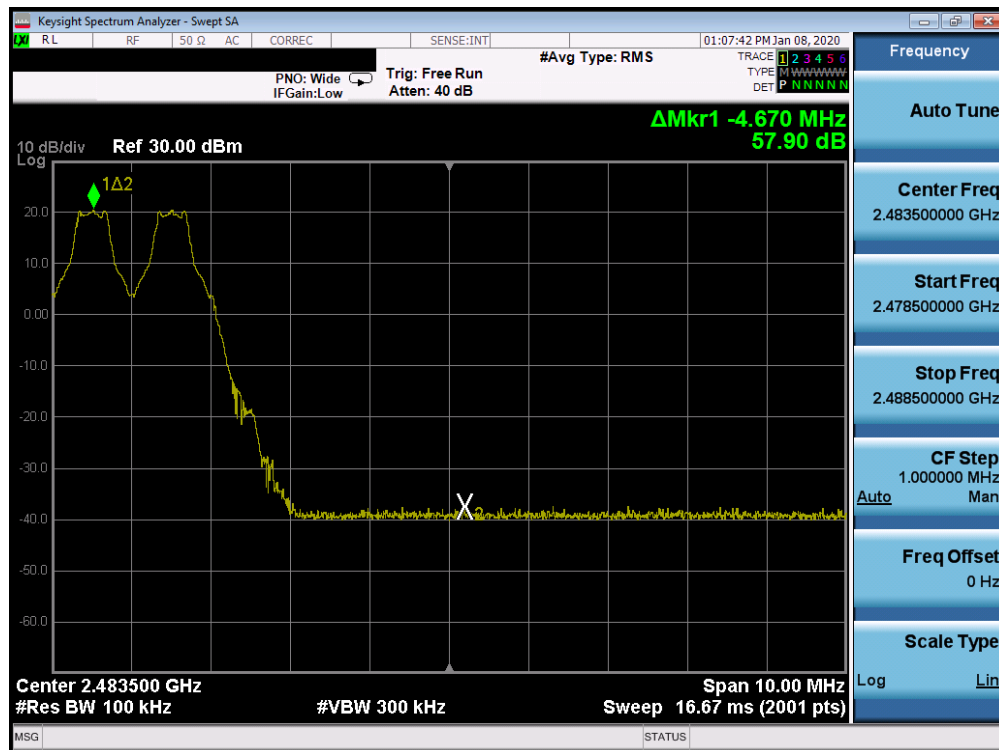


Plot 7-16. Band Edge Plot Ant 4a (Bluetooth with Hopping Enabled, GFSK, ePA)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        | <b>PCTEST</b>                          | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 31 of 95                   |

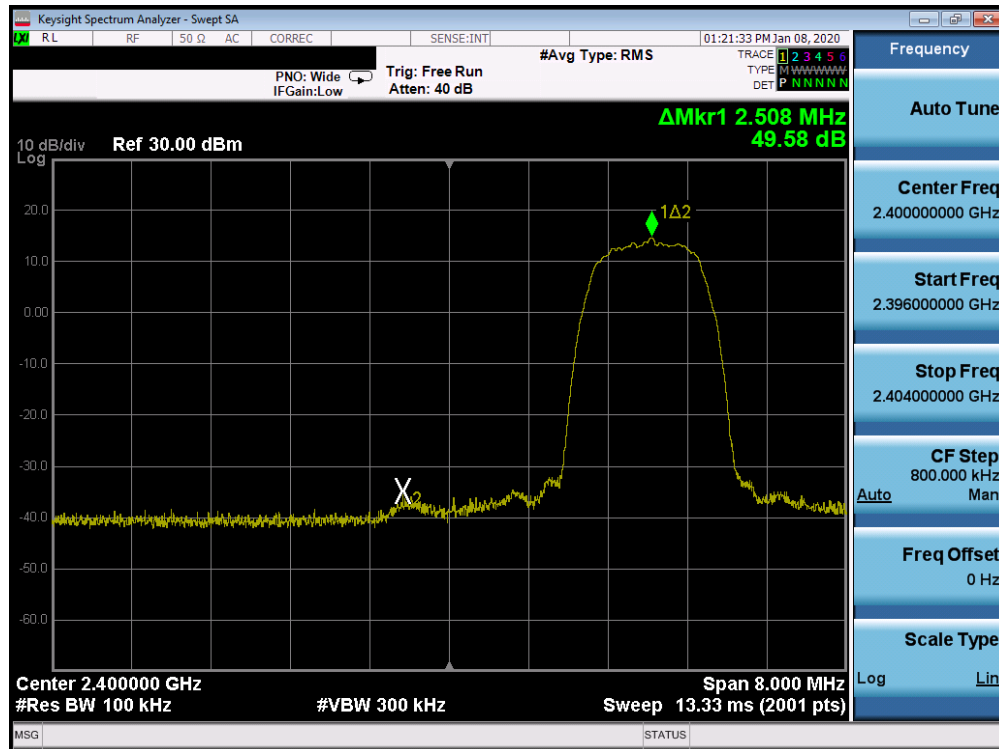


Plot 7-17. Band Edge Plot Ant 4a (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

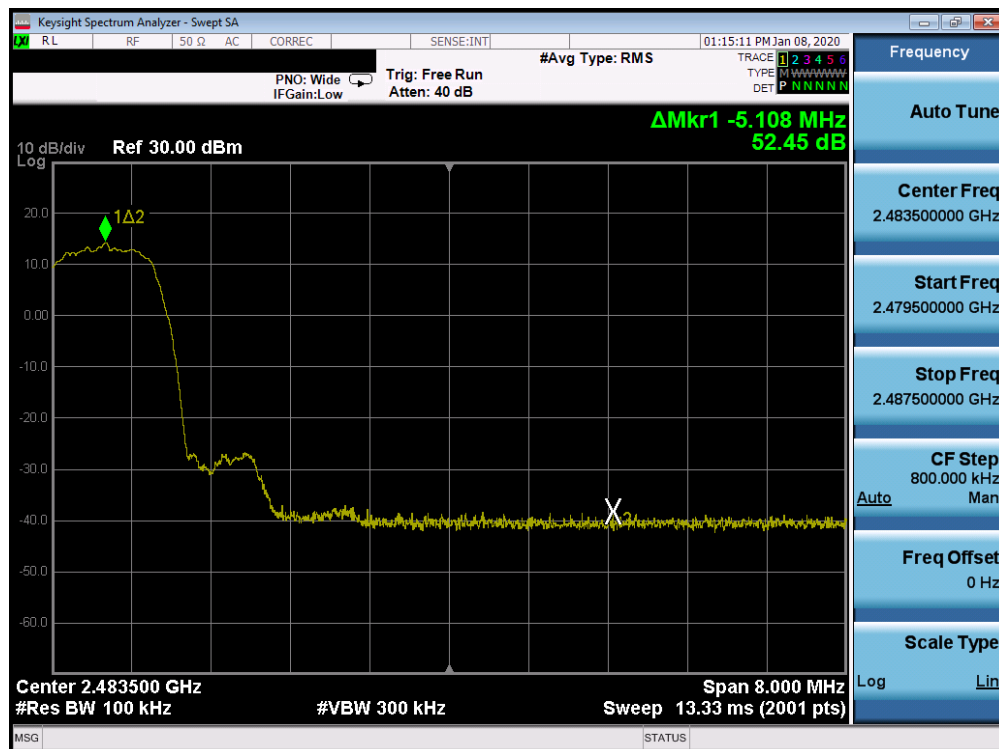


Plot 7-18. Band Edge Plot Ant 4a (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 32 of 95                   |

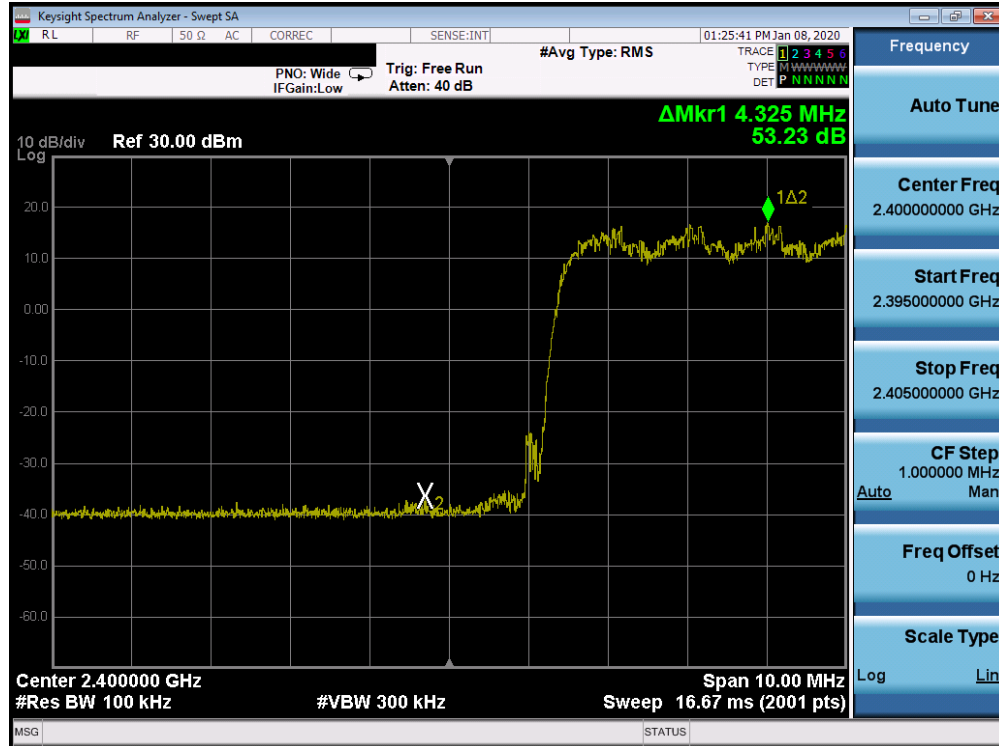


Plot 7-19. Band Edge Plot Ant 4a (Bluetooth with Hopping Enabled, 8DPSK, ePA)

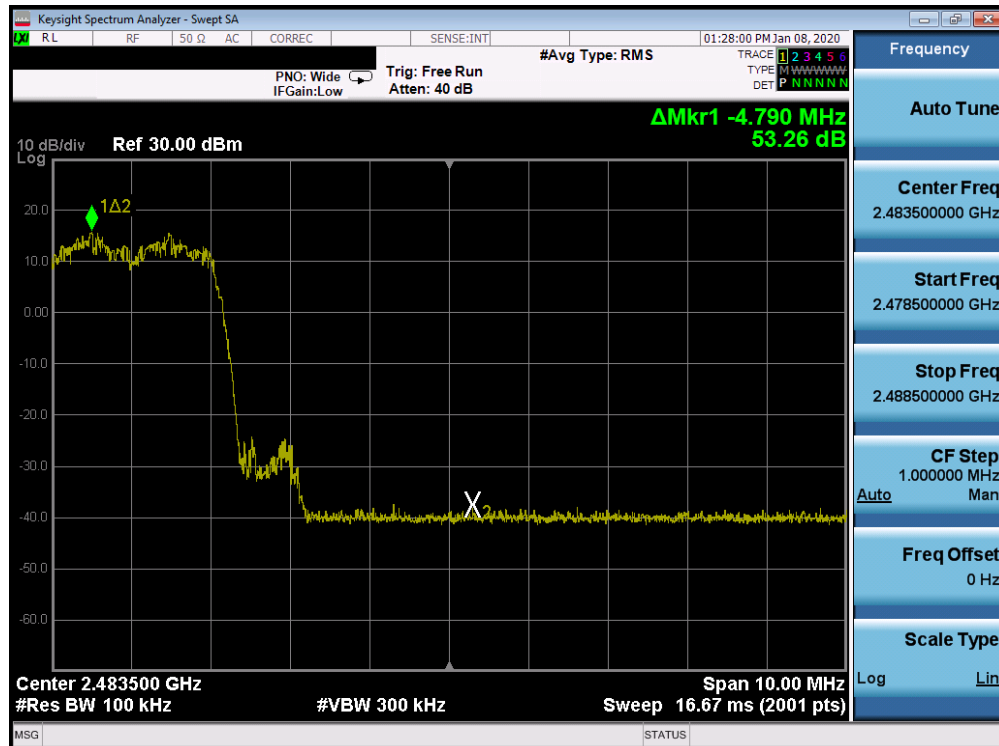


Plot 7-20. Band Edge Plot Ant 4a (Bluetooth with Hopping Enabled, 8DPSK, ePA)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 33 of 95                   |

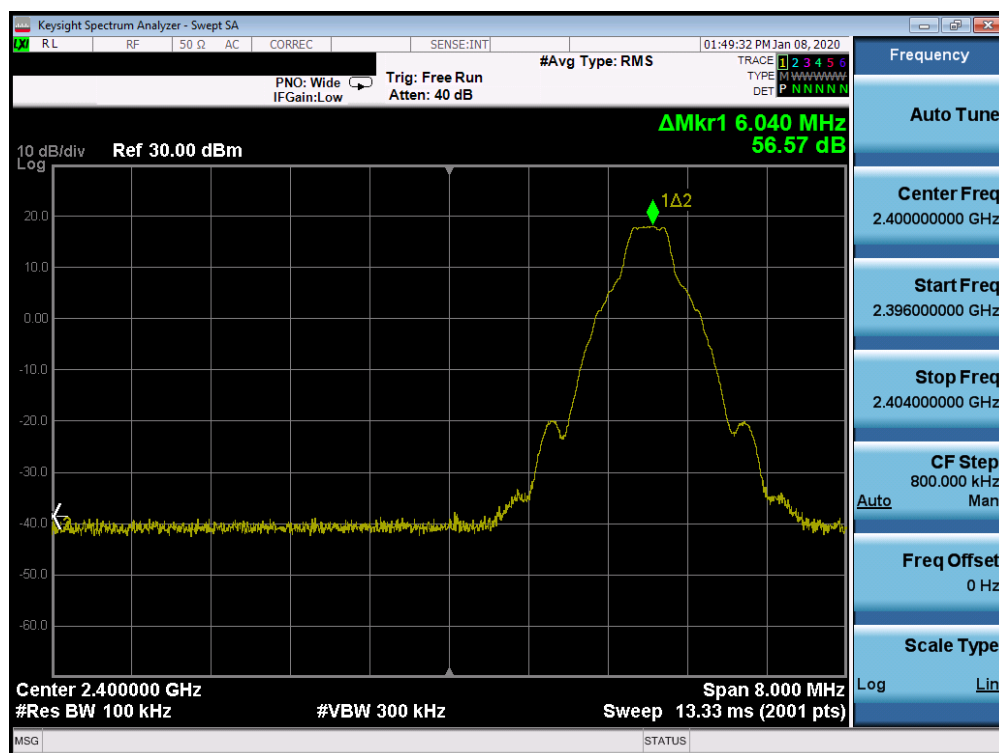


Plot 7-21. Band Edge Plot Ant 2a (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

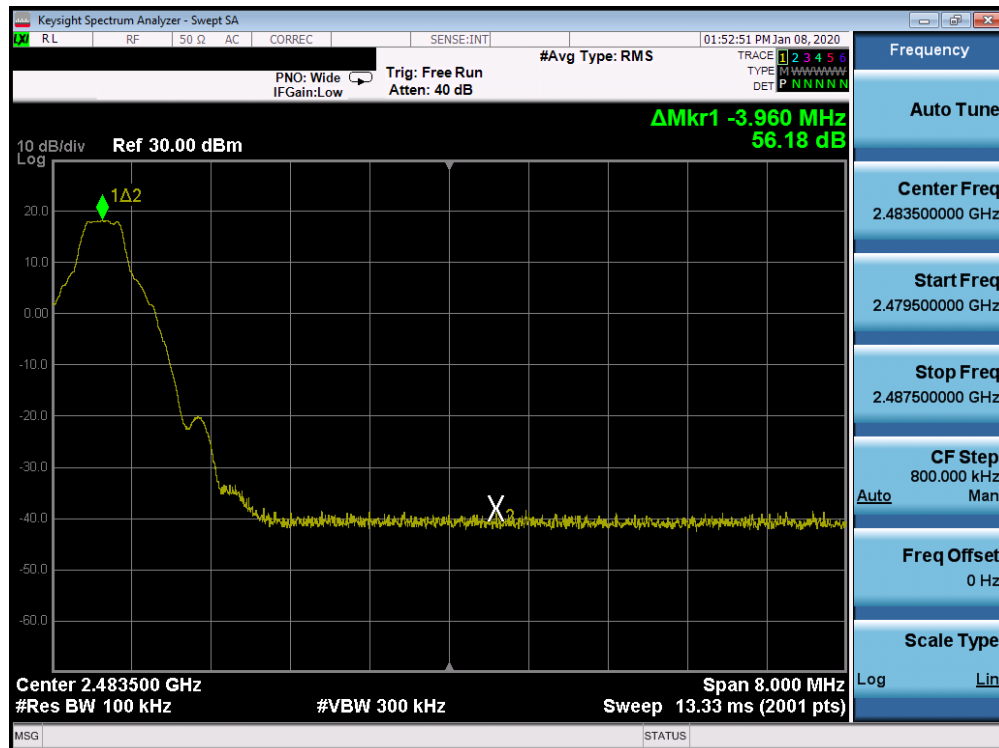


Plot 7-22. Band Edge Plot Ant 2a (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 34 of 95                   |

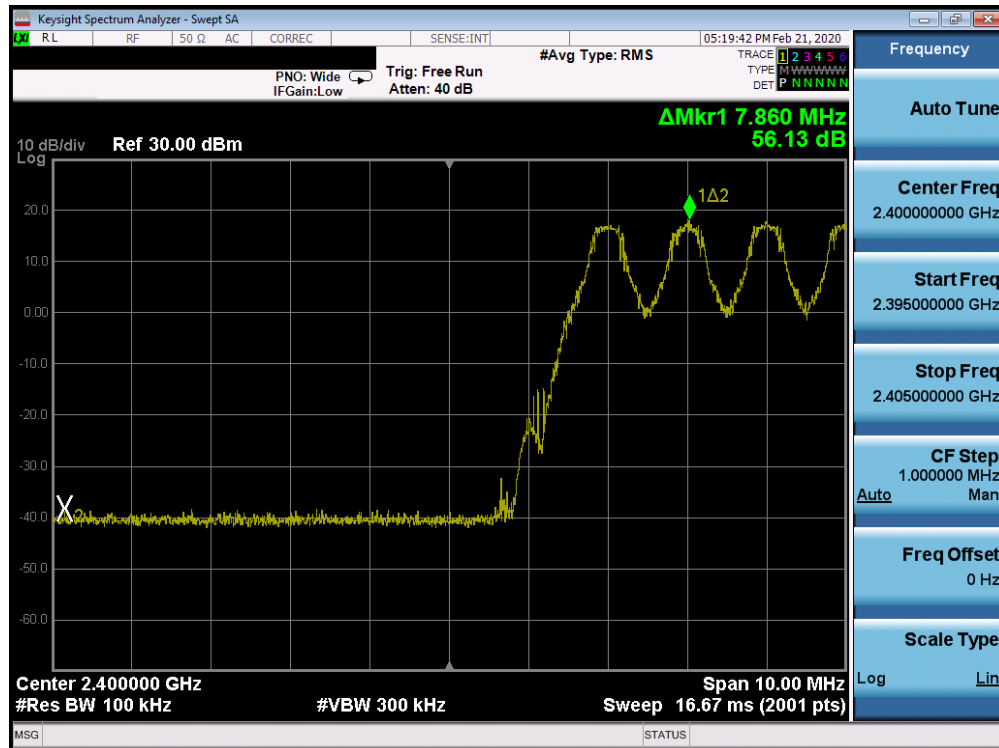


Plot 7-23. Band Edge Plot Ant 2a (Bluetooth with Hopping Enabled, GFSK, ePA)

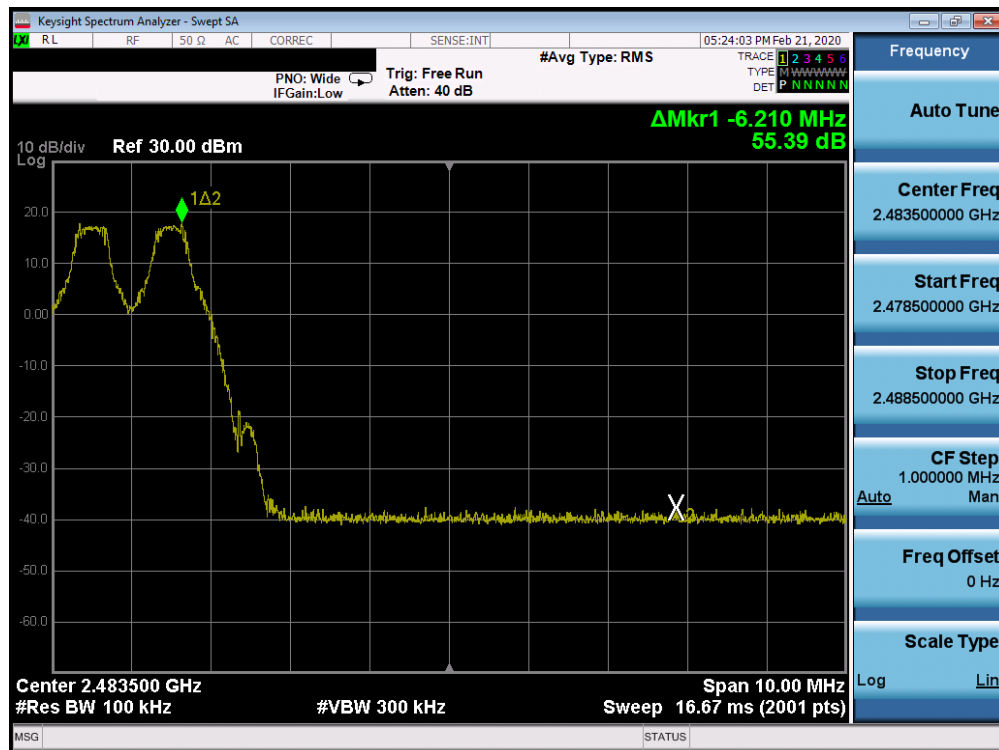


Plot 7-24. Band Edge Plot Ant 2a (Bluetooth with Hopping Enabled, GFSK, ePA)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        | <b>PCTEST</b>                          | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 35 of 95                   |

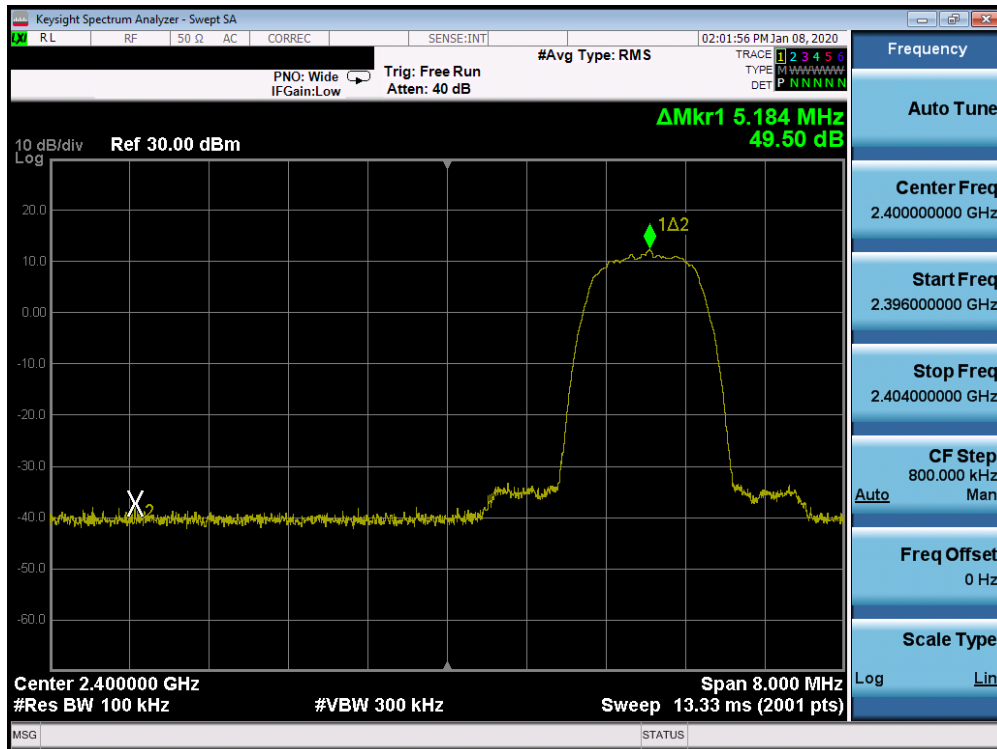


Plot 7-25. Band Edge Plot Ant 2a (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

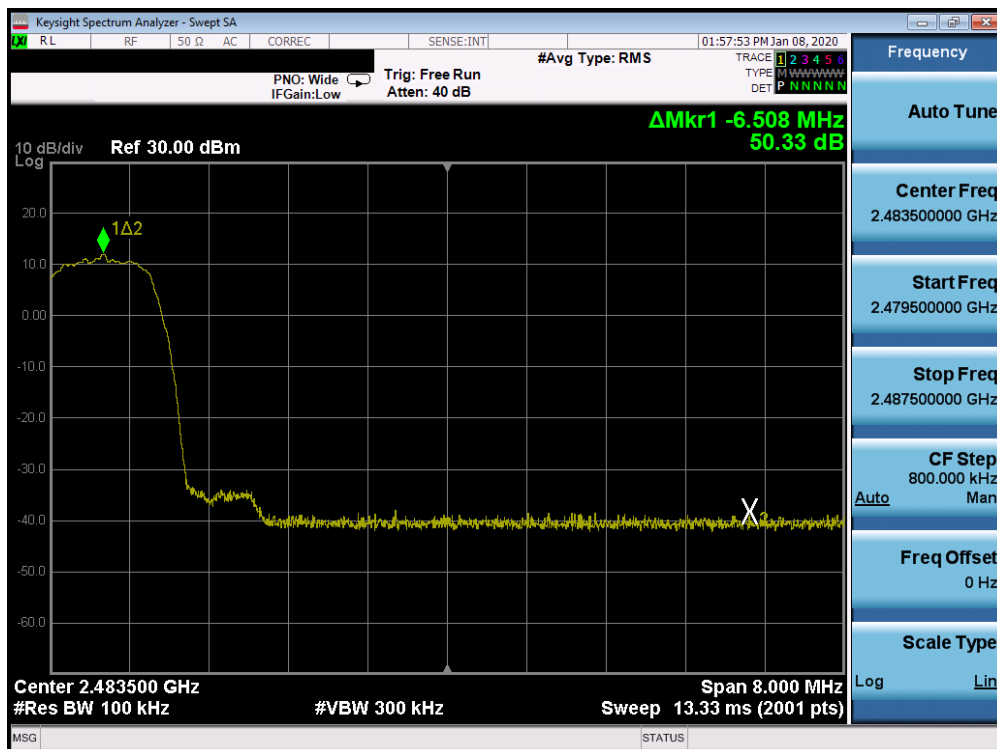


Plot 7-26. Band Edge Plot Ant 2a (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        | <b>PCTEST</b>                          | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 36 of 95                   |

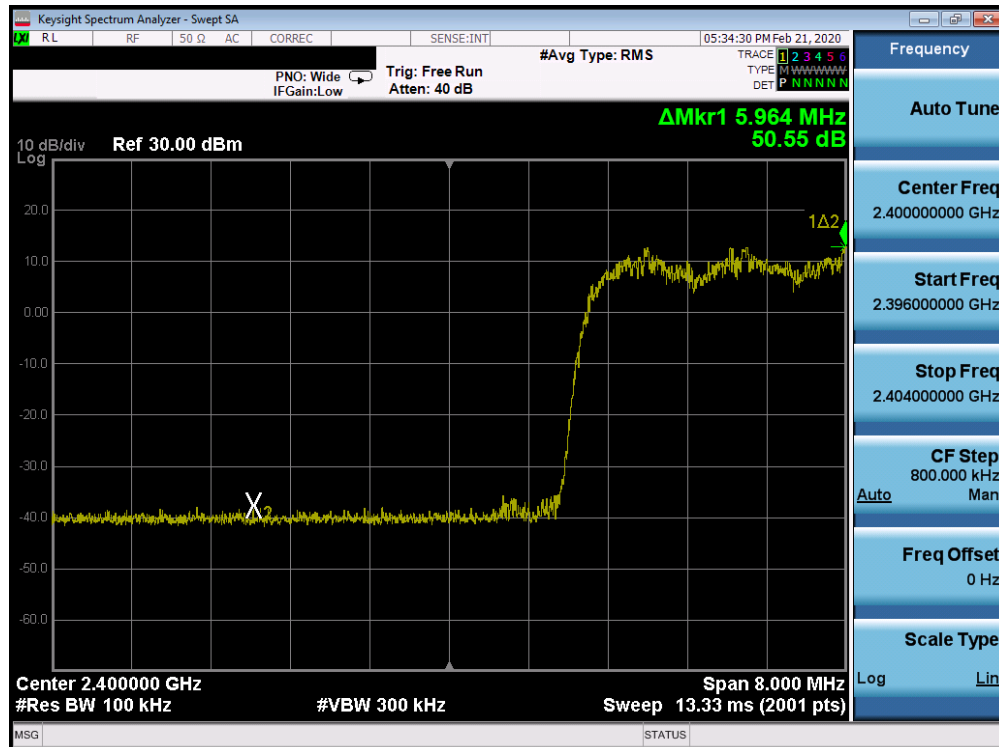

Plot 7-27. Band Edge Plot Ant 2a (Bluetooth with Hopping Enabled, 8DPSK, ePA)

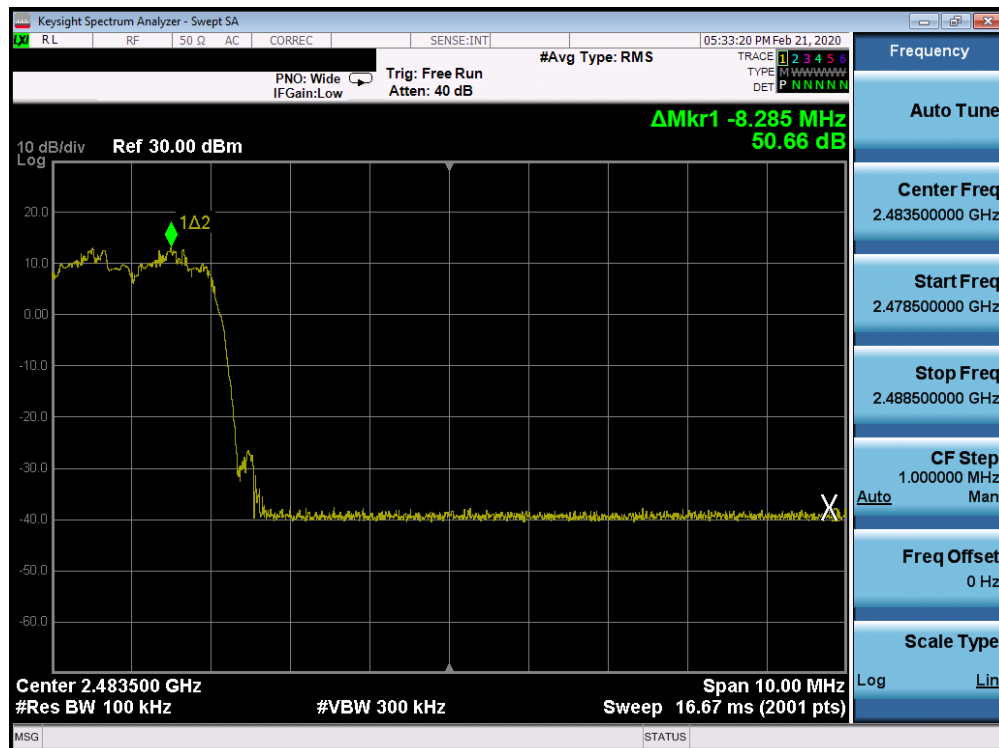

Plot 7-28. Band Edge Plot Ant 2a (Bluetooth with Hopping Enabled, 8DPSK, ePA)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        | <b>PCTEST</b>                          | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 37 of 95                   |

## 7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(b)]

### Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

### Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW  $\geq$  RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

1. The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.
2. Both power schemes were investigated and only the worst case is reported.


|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 38 of 95                   |

# Ant 4a


| Frequency [MHz] | Data Rate [Mbps] | Mod.  | Power Scheme | Channel No. | Min. Channel Separation [MHz] |
|-----------------|------------------|-------|--------------|-------------|-------------------------------|
| 2402            | 1.0              | GFSK  | ePA          | 0           | 0.635                         |
| 2441            | 1.0              | GFSK  | ePA          | 39          | 0.634                         |
| 2480            | 1.0              | GFSK  | ePA          | 78          | 0.635                         |
| 2402            | 3.0              | 8DPSK | ePA          | 0           | 0.923                         |
| 2441            | 3.0              | 8DPSK | ePA          | 39          | 0.923                         |
| 2480            | 3.0              | 8DPSK | ePA          | 78          | 0.925                         |

**Table 7-10. Minimum Channel Separation Ant 4a**

|                                                |                                                                                     |                                               |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2232                        |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C1912170055-10.BCG | <b>Test Dates:</b><br>12/10/2019 - 02/20/2020                                       | <b>EUT Type:</b><br>Tablet Device             | Page 39 of 95                          |

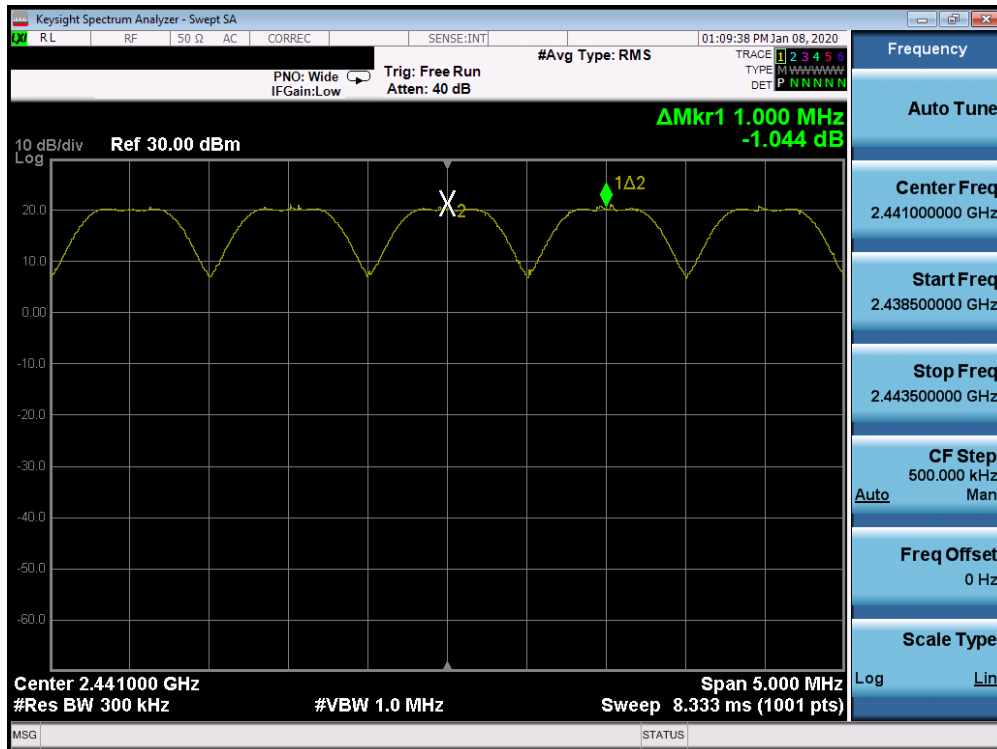

Plot 7-29. Channel Spacing Plot Ant 4a (Bluetooth, GFSK, ePA)

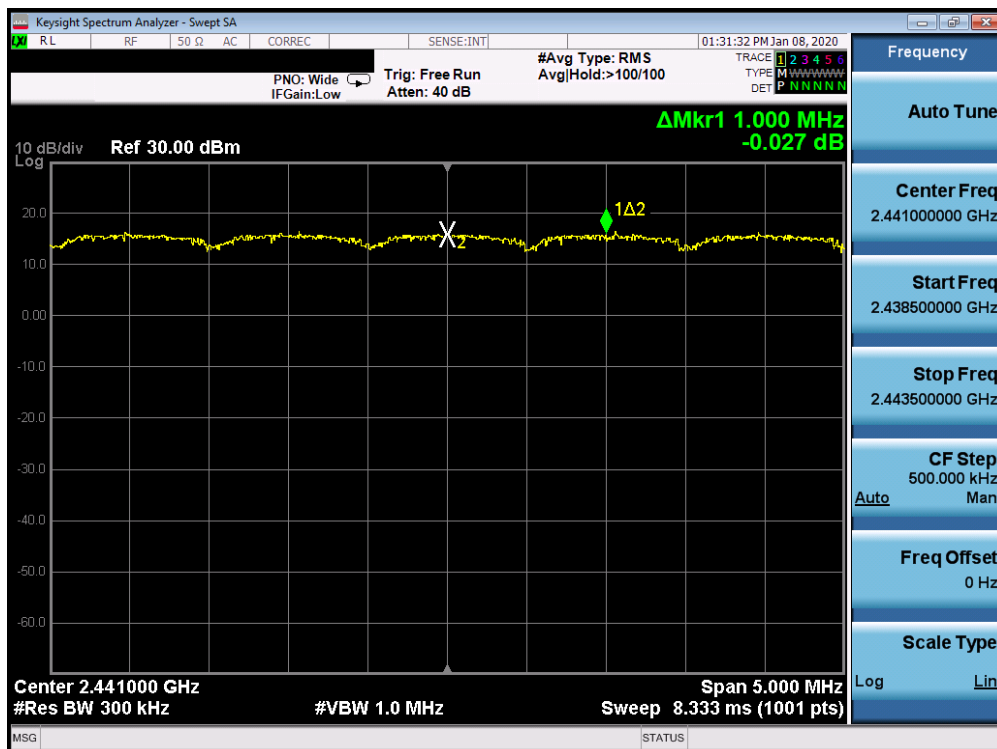

Plot 7-30. Channel Spacing Plot Ant 4a (Bluetooth, 8DPSK, ePA)


|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        | <b>PCTEST</b>                          | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 40 of 95                   |

## Ant 2a


| Frequency [MHz] | Data Rate [Mbps] | Mod.  | Power Scheme | Channel No. | Min. Channel Separation [MHz] |
|-----------------|------------------|-------|--------------|-------------|-------------------------------|
| 2402            | 1.0              | GFSK  | ePA          | 0           | 0.635                         |
| 2441            | 1.0              | GFSK  | ePA          | 39          | 0.635                         |
| 2480            | 1.0              | GFSK  | ePA          | 78          | 0.635                         |
| 2402            | 3.0              | 8DPSK | ePA          | 0           | 0.924                         |
| 2441            | 3.0              | 8DPSK | ePA          | 39          | 0.923                         |
| 2480            | 3.0              | 8DPSK | ePA          | 78          | 0.925                         |

**Table 7-11. Minimum Channel Separation Ant 2a**

|                                                |                                                                                     |                                               |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2232                        |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C1912170055-10.BCG | <b>Test Dates:</b><br>12/10/2019 - 02/20/2020                                       | <b>EUT Type:</b><br>Tablet Device             | Page 41 of 95                          |

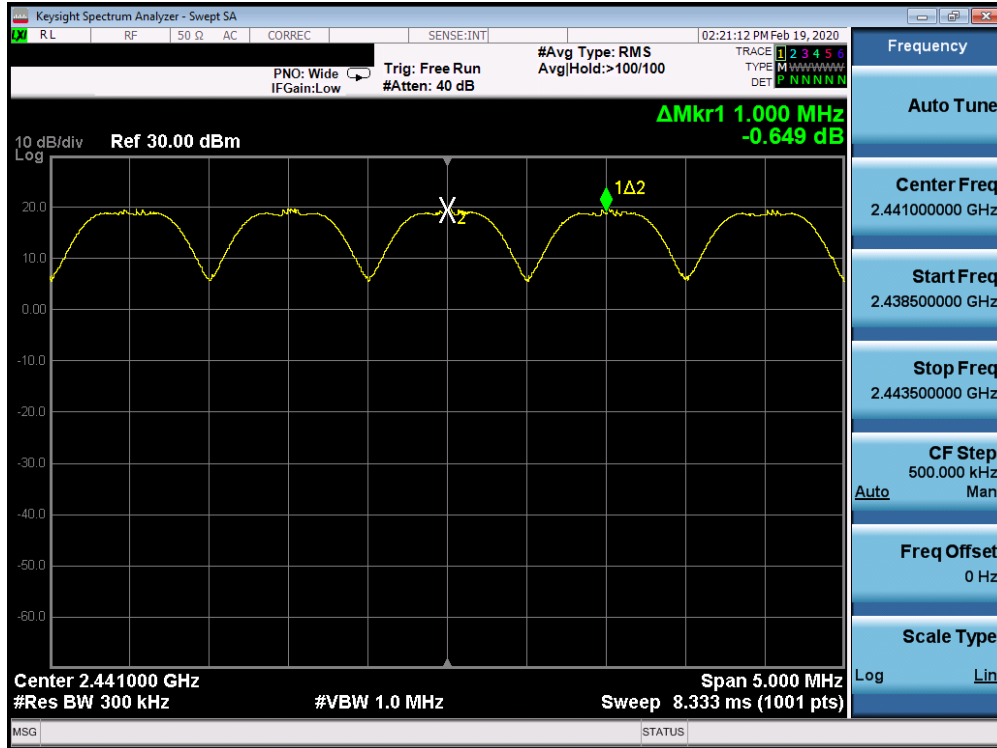

Plot 7-31. Channel Spacing Plot Ant 2a (Bluetooth, GFSK, ePA)

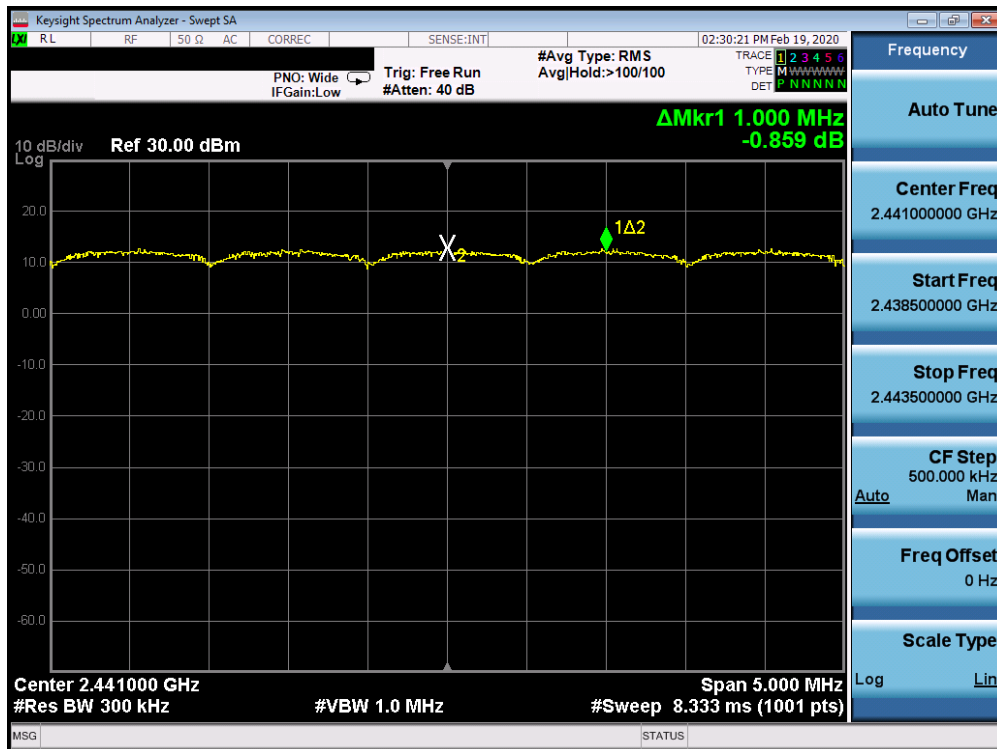

Plot 7-32. Channel Spacing Plot Ant 2a (Bluetooth, 8DPSK, ePA)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        | <b>PCTEST</b>                          | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 42 of 95                   |

## 7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(d)]

### Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. **The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.**

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

### Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW  $\leq$  channel spacing and  $\gg 1/T$ , where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

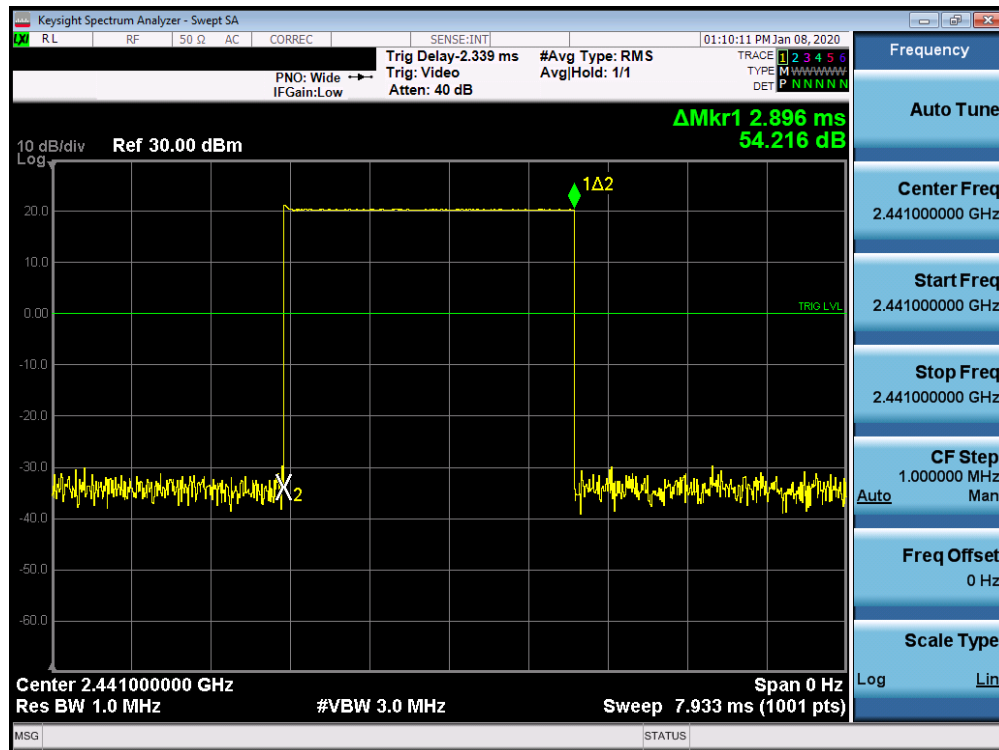


Figure 7-5. Test Instrument & Measurement Setup


### Test Notes

Both power schemes were investigated and only the worst case is reported.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 43 of 95                   |




Plot 7-33. Time of Occupancy Plot Ant 4a (Bluetooth, GFSK, ePA)

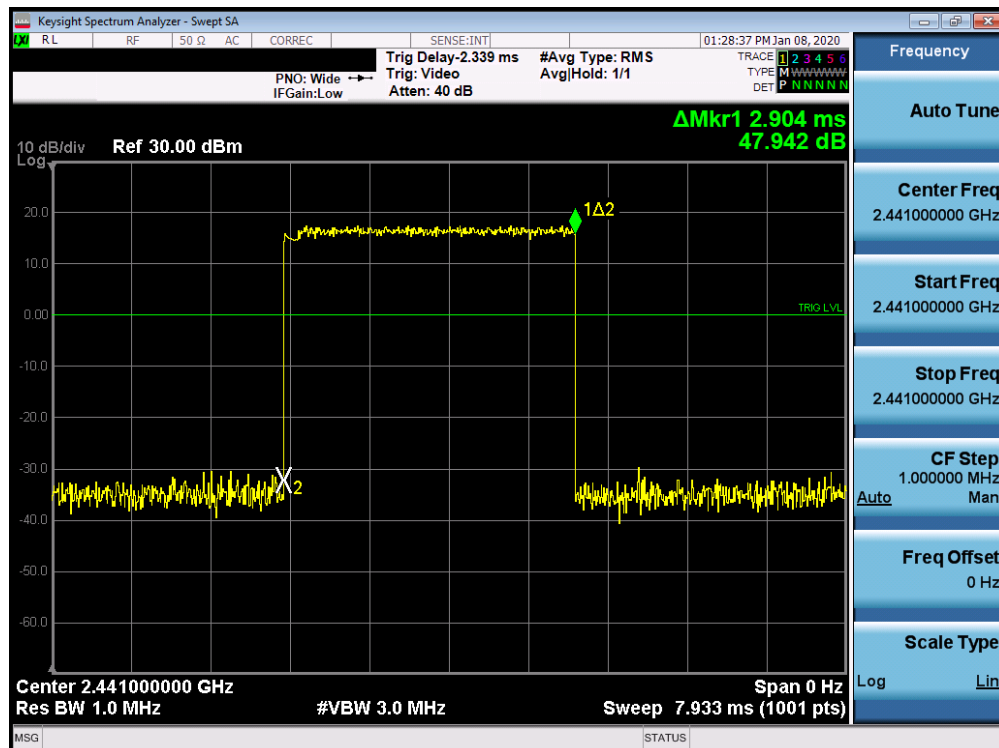


Plot 7-34. Time of Occupancy Plot Ant 4a (Bluetooth, 8DPSK, ePA)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 44 of 95                   |

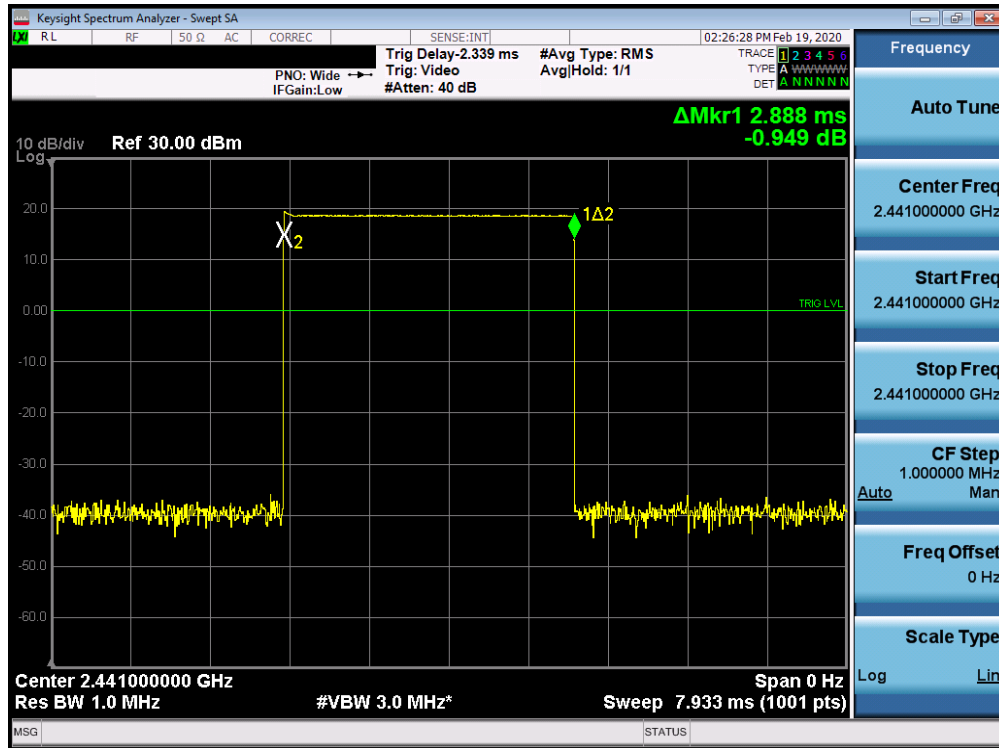

Plot 7-35. Time of Occupancy Plot Ant 2a (Bluetooth, GFSK, ePA)

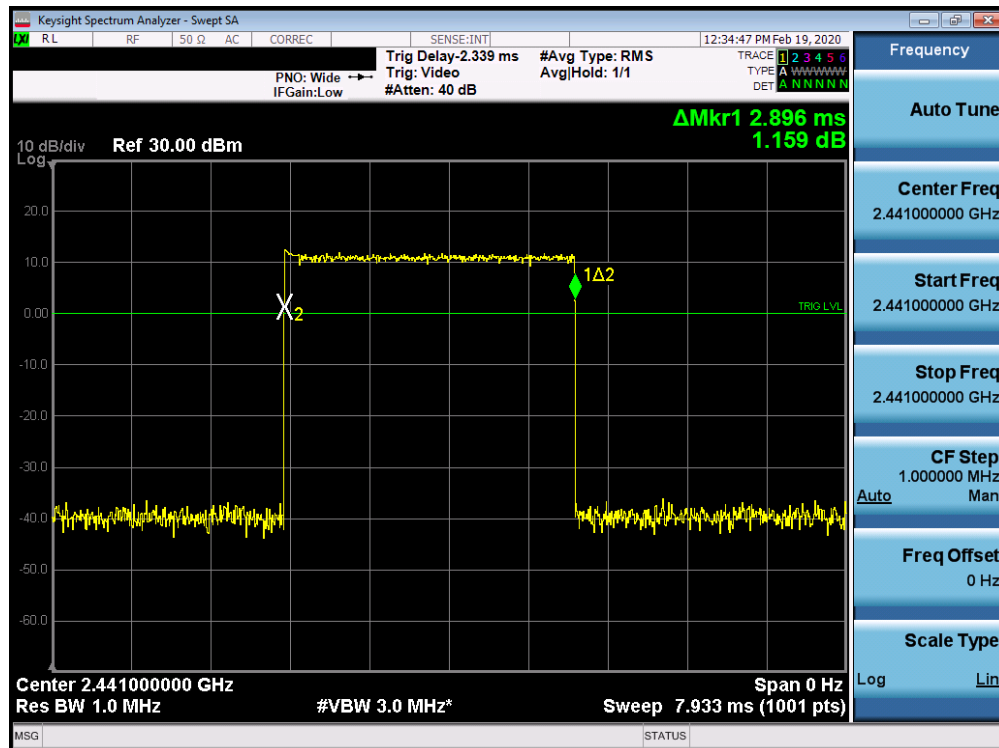

Plot 7-36. Time of Occupancy Plot Ant 2a (Bluetooth, 8DPSK, ePA)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 45 of 95                   |

### **Bluetooth Time of Occupancy Calculation**

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of  $1600 / 6 = 266.67$  hops/s/slot

- o  $400\text{ms} \times 79$  hopping channels = 31.6 sec (Time of Occupancy Limit)
- o Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- o  $266.67 \text{ hops/second} / 79$  channels = 3.38 hops/second (# of hops/second on one channel)
- o  $3.38 \text{ hops/second/channel} \times 31.6$  seconds = 106.67 hops (# hops over a 31.6 second period)
- o  $106.67 \text{ hops} \times 2.904 \text{ ms/channel}$  = N/A ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of  $800 / 6 = 133.3$  hops/s/slot

- o  $400\text{ms} \times 20$  hopping channels = 8 sec (Time of Occupancy Limit)
- o Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- o  $133.3 \text{ hops/s} / 20$  channels = 6.67 hops/second (# of hops/second on one channel)
- o  $6.67 \text{ hops/s} / \text{channel} \times 8$  seconds = 53.34 hops (# hops over a 8 second period)
- o  $53.34 \text{ hops} \times 2.904 \text{ ms/channel}$  = N/A ms (worst case dwell time for one channel in AFH mode)

The measured worst case dwell time is below the limit of 0.4s.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 46 of 95                   |

## 7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(d)]

### Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

### Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-6. Test Instrument & Measurement Setup**

### Test Notes


1. The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.
2. Both power schemes were investigated and only the worst case is reported.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 47 of 95                   |

# Ant 4a

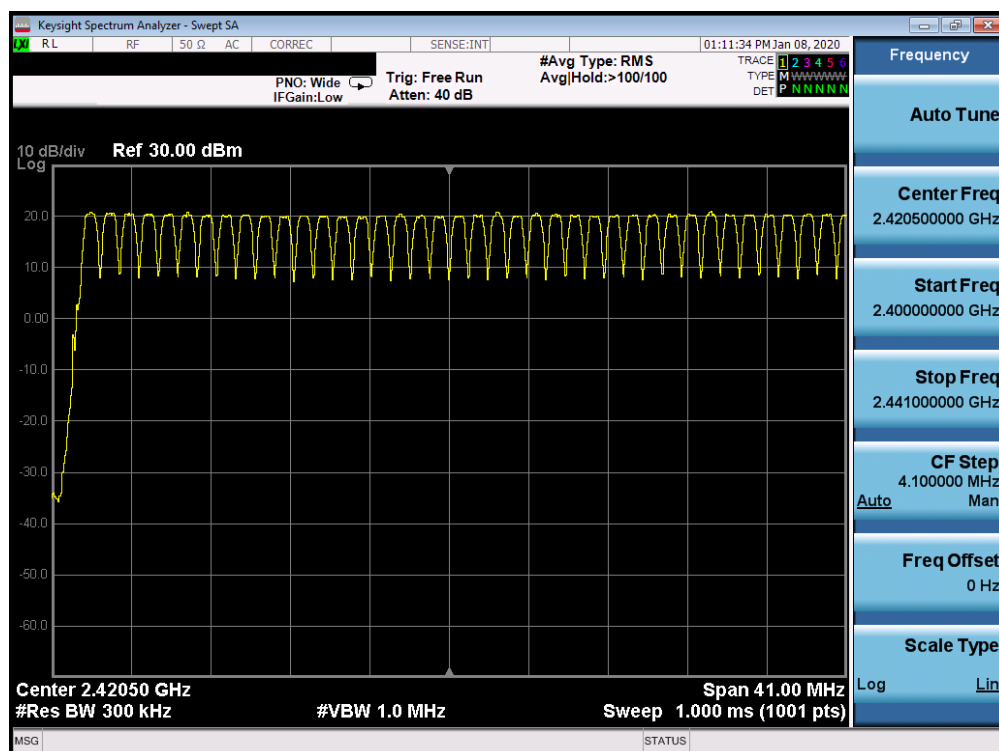


Plot 7-37. Low End Spectrum Channel Hopping Plot Ant 4a (Bluetooth, GFSK, ePA)

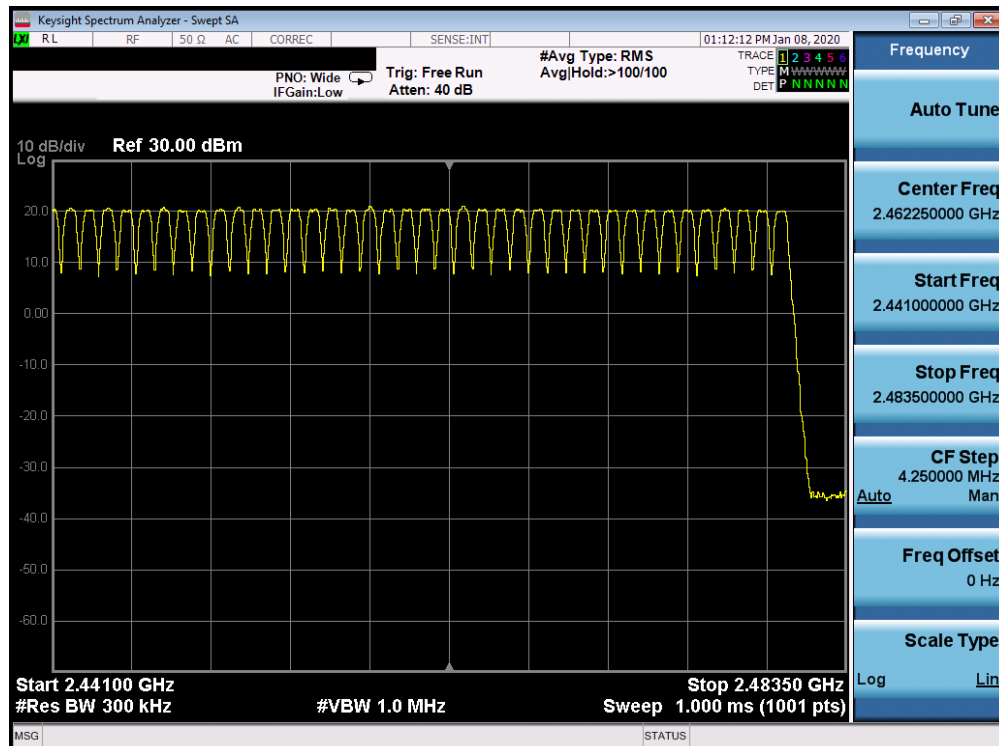


Plot 7-38. High End Spectrum Channel Hopping Plot Ant 4a (Bluetooth, GFSK, ePA)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 48 of 95                   |

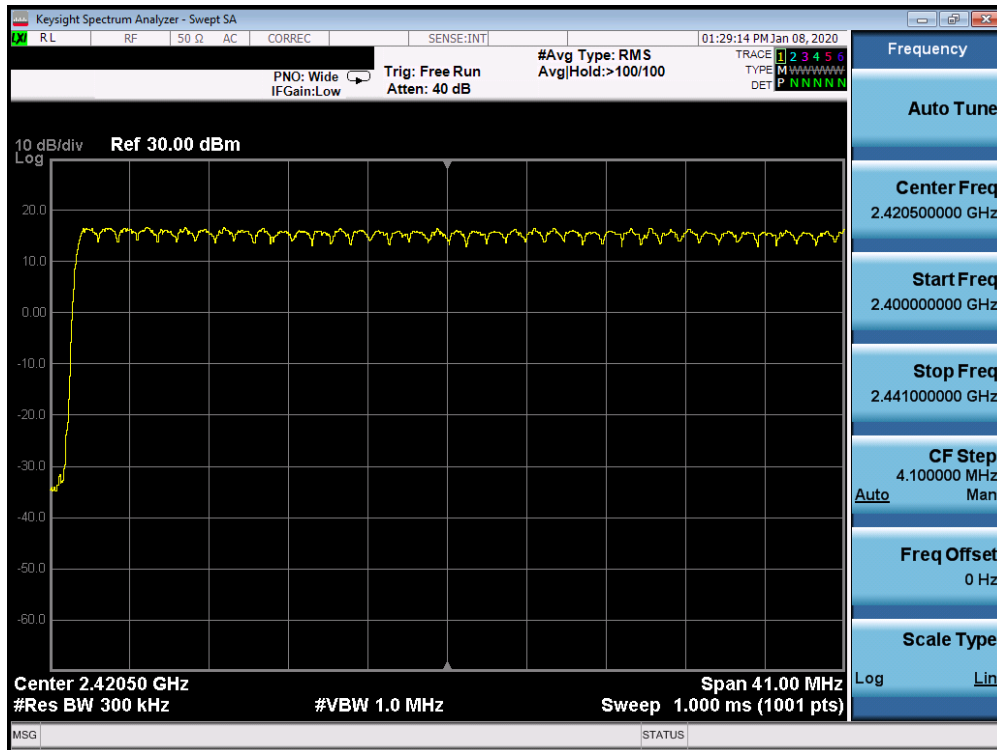


Plot 7-39. Low End Spectrum Channel Hopping Plot Ant 4a (Bluetooth, 8DPSK, ePA)

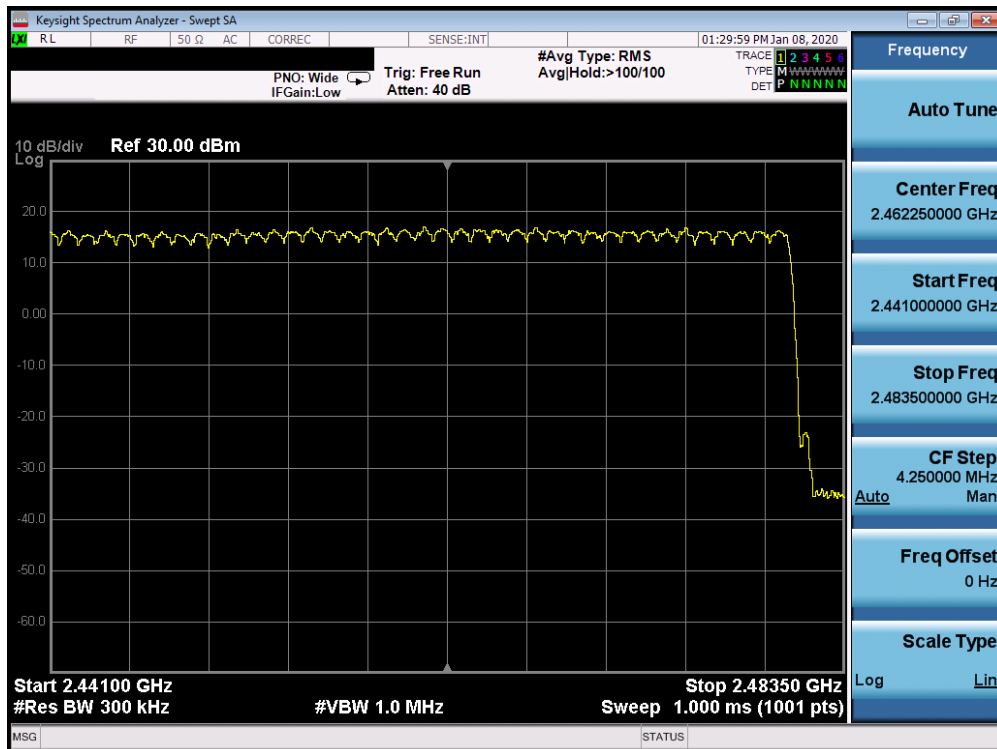


Plot 7-40. High End Spectrum Channel Hopping Plot Ant 4a (Bluetooth, 8DPSK, ePA)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 49 of 95                   |

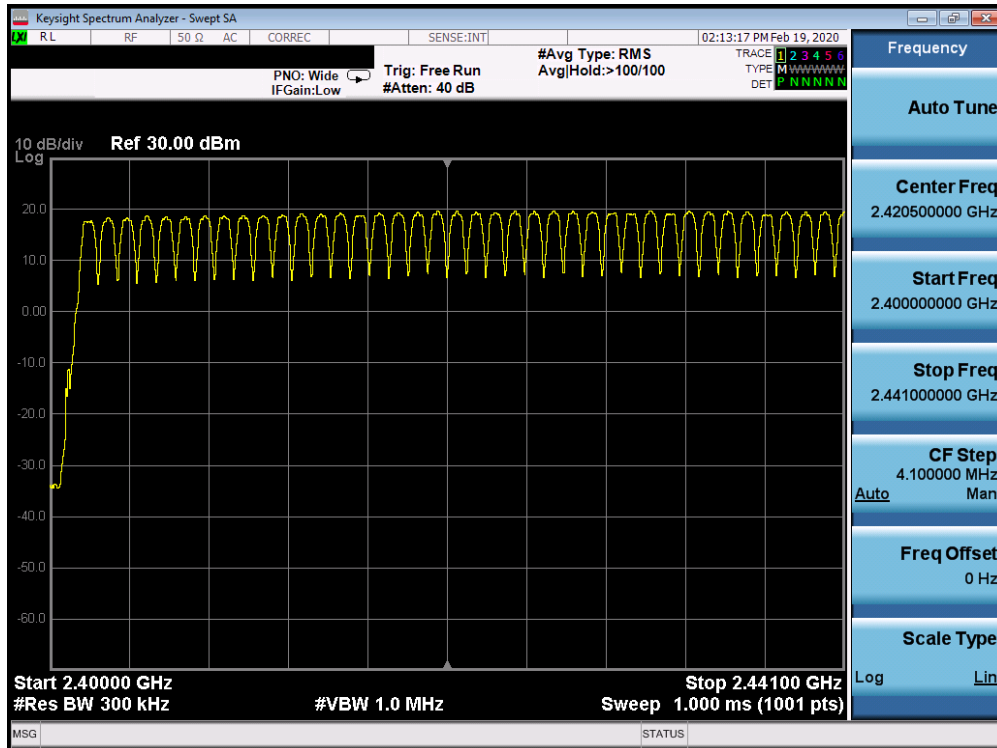


Plot 7-41. Low End Spectrum Channel Hopping Plot Ant 2a (Bluetooth, GFSK, ePA)

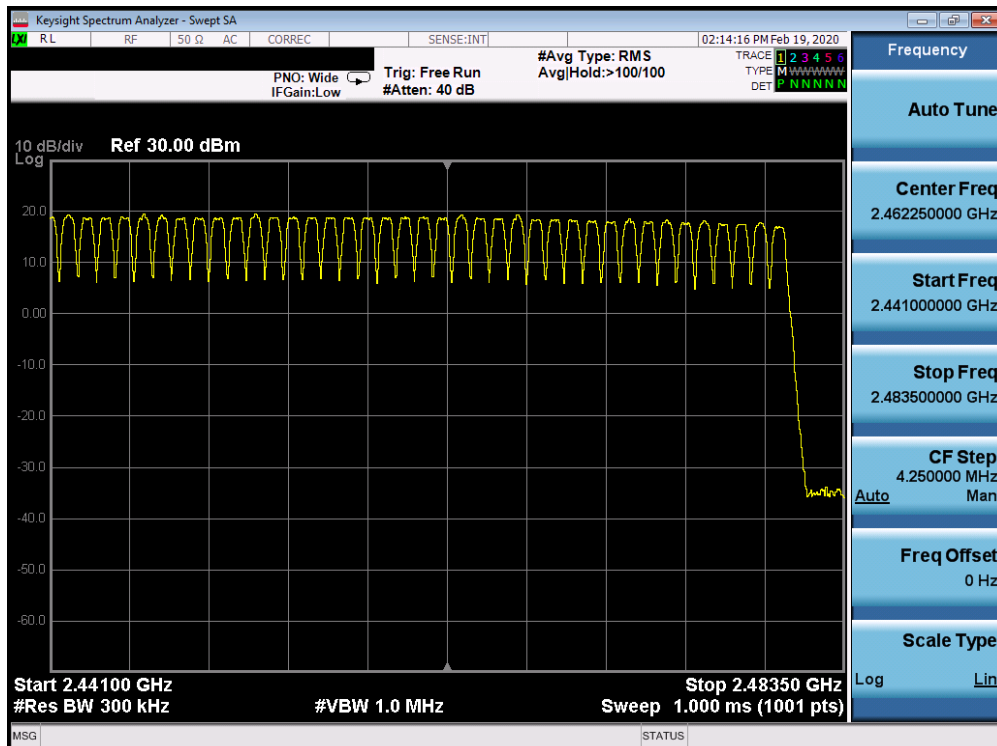


Plot 7-42. High End Spectrum Channel Hopping Plot Ant 2a (Bluetooth, GFSK, ePA)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 50 of 95                   |

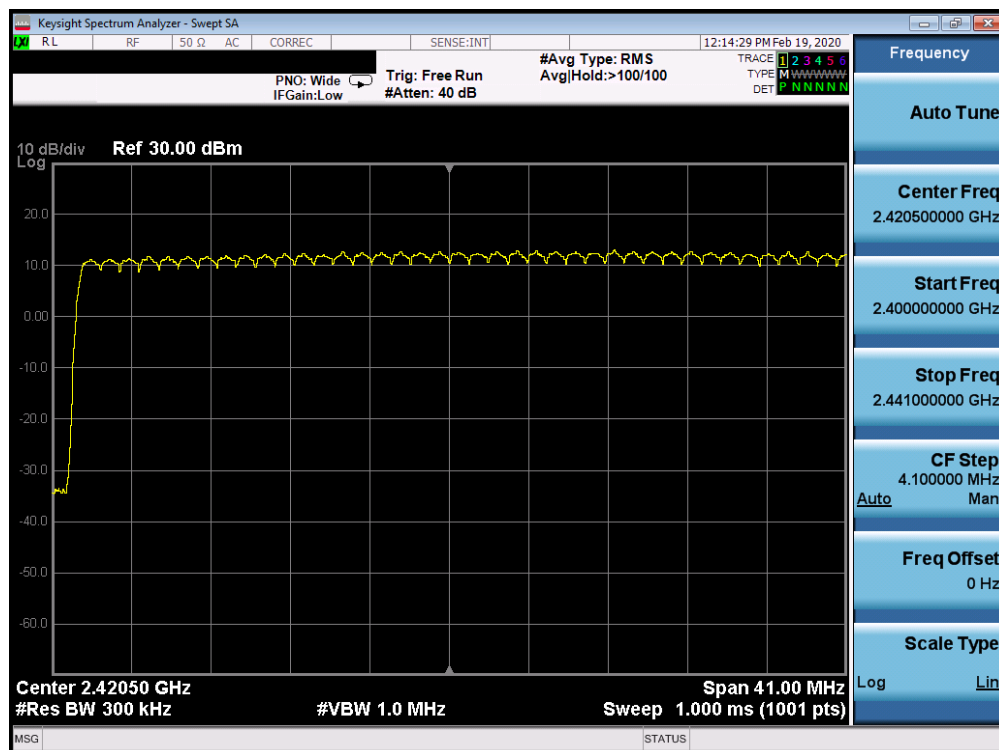

**Plot 7-43. Low End Spectrum Channel Hopping Plot Ant 2a (Bluetooth, 8DPSK, ePA)**

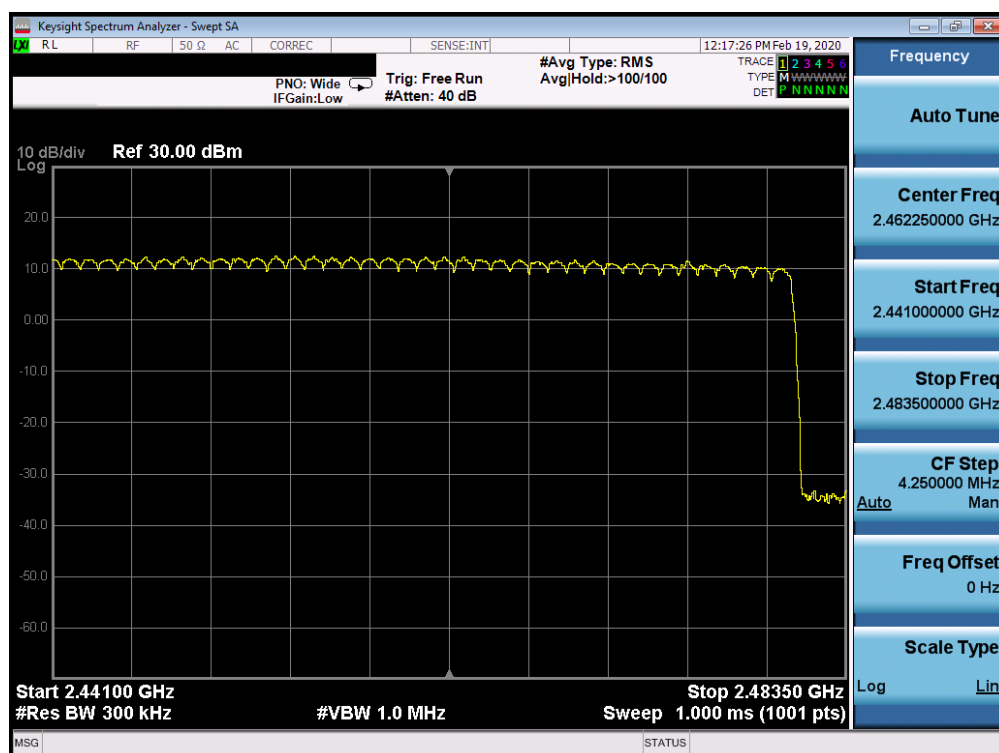

#### Plot 7-44. High End Spectrum Channel Hopping Plot Ant 2a (Bluetooth, 8DPSK, ePA)

|                                                |                                                                                                                                   |                                   |                                        |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| FCC ID: BCGA2232                               |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                                   | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C1912170055-10.BCG | <b>Test Dates:</b><br>12/10/2019 - 02/20/2020                                                                                     | <b>EUT Type:</b><br>Tablet Device | Page 51 of 95                          |

## 7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

### Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10<sup>th</sup> harmonic of the fundamental transmit frequency. **The maximum permissible out-of-band emission level is 20 dBc.**

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz\* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-7. Test Instrument & Measurement Setup**

### Test Notes


1. Out-of-band conducted spurious emissions were investigated for all data rates and the worst case emissions were found with the EUT transmitting at 1Mbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
2. Both power schemes were investigated and only the worst case is reported.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 52 of 95                   |

V 9.0 02/01/2019

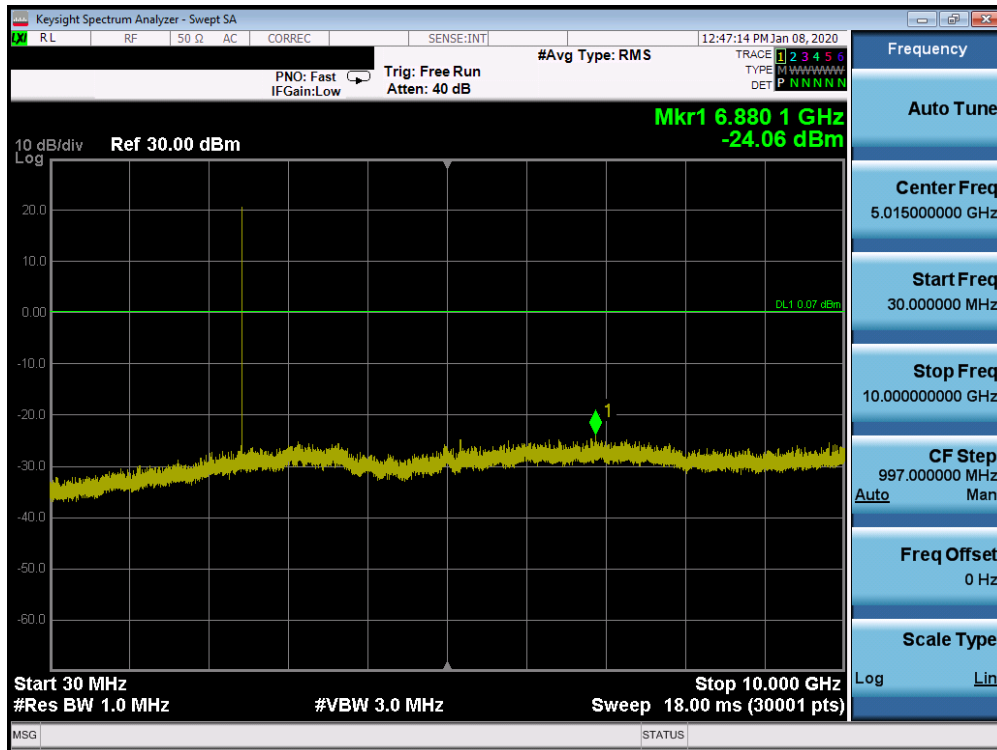


Plot 7-47. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 39)

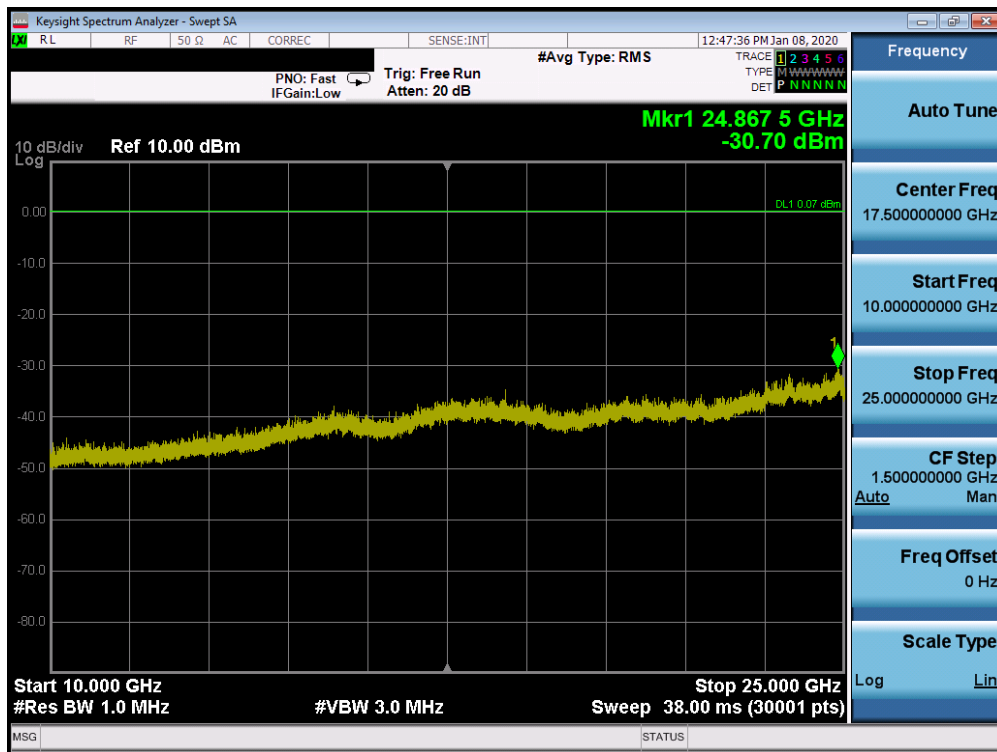


Plot 7-48. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA Ch. 39)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 54 of 95                   |

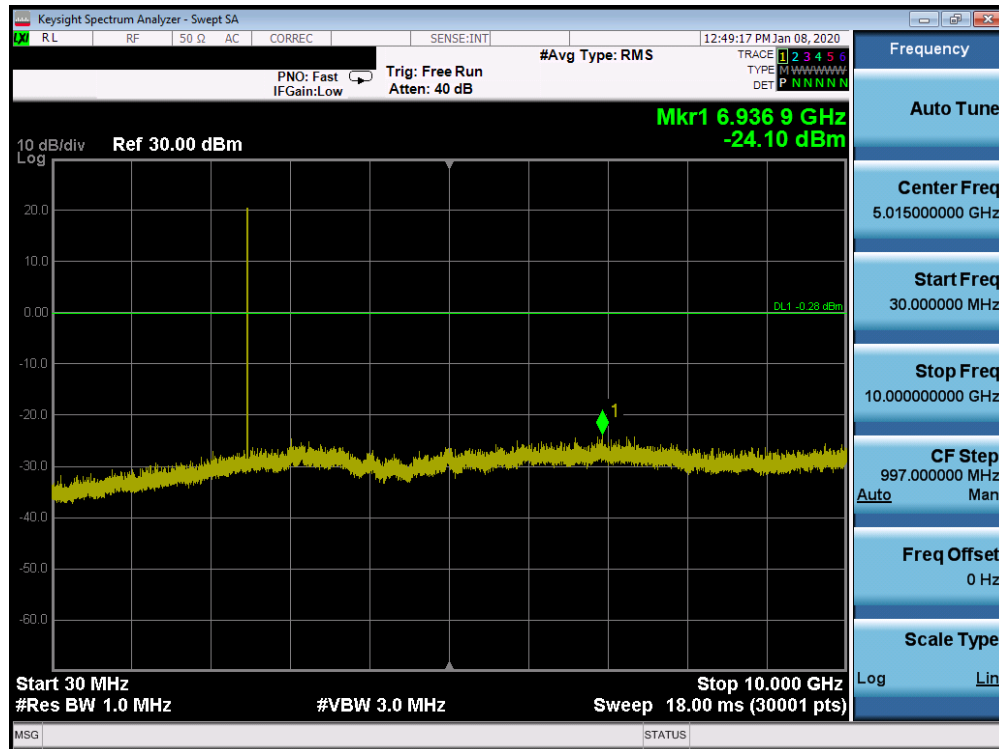


Plot 7-49. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 78)

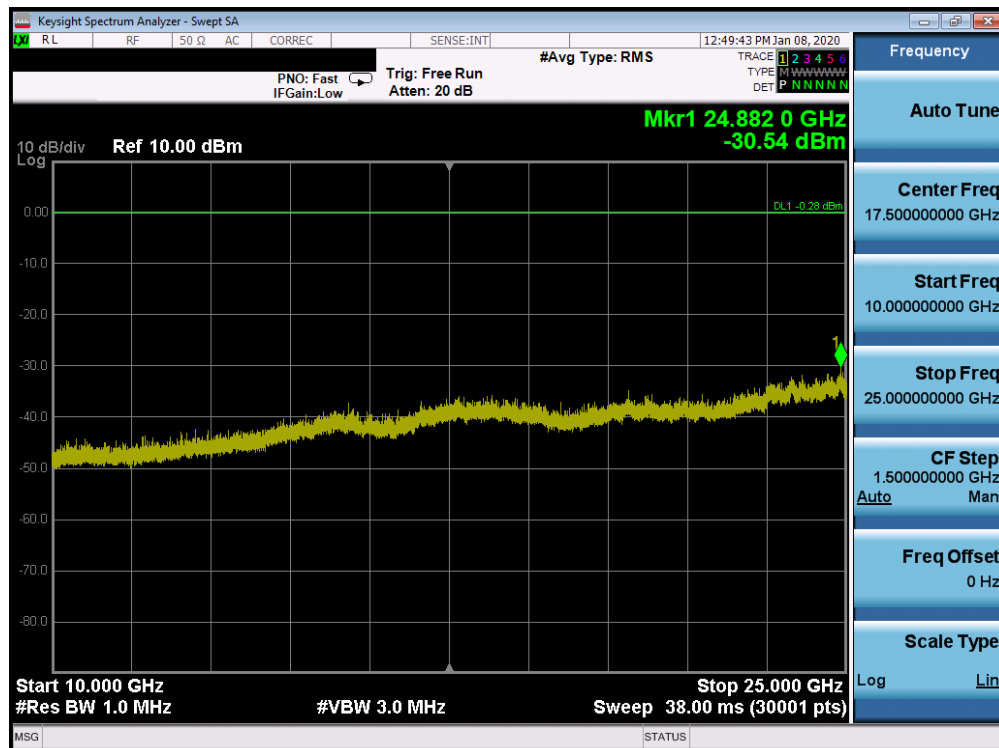


Plot 7-50. Conducted Spurious Plot Ant 4a (Bluetooth, GFSK, ePA – Ch. 78)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        | <b>PCTEST</b>                          | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 55 of 95                   |

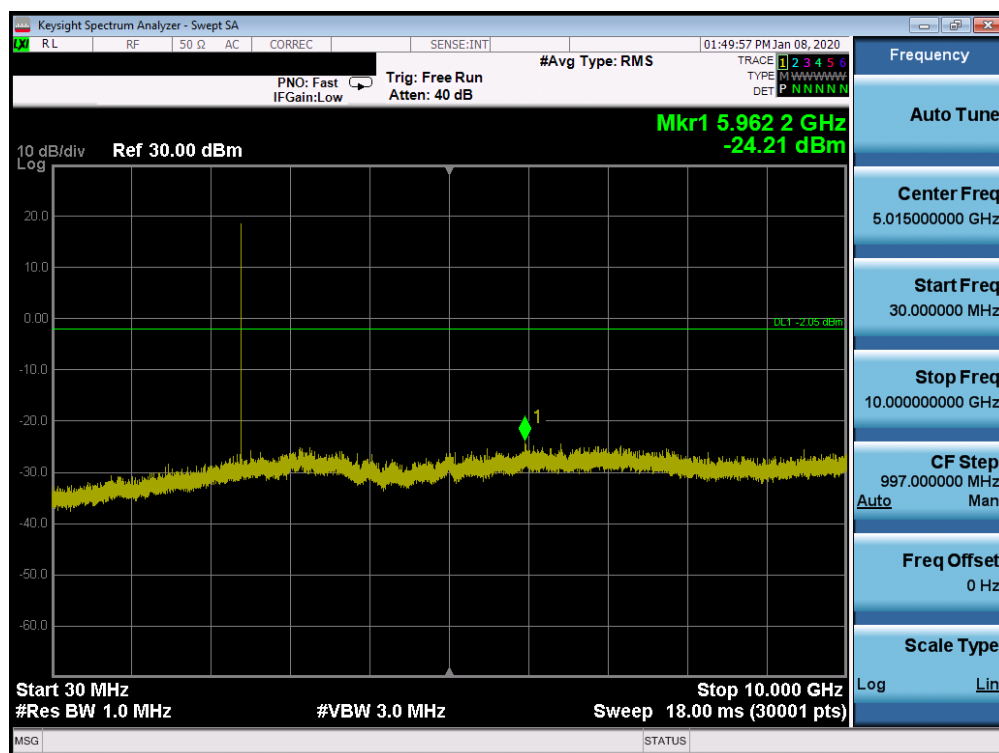


Plot 7-51. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 0)

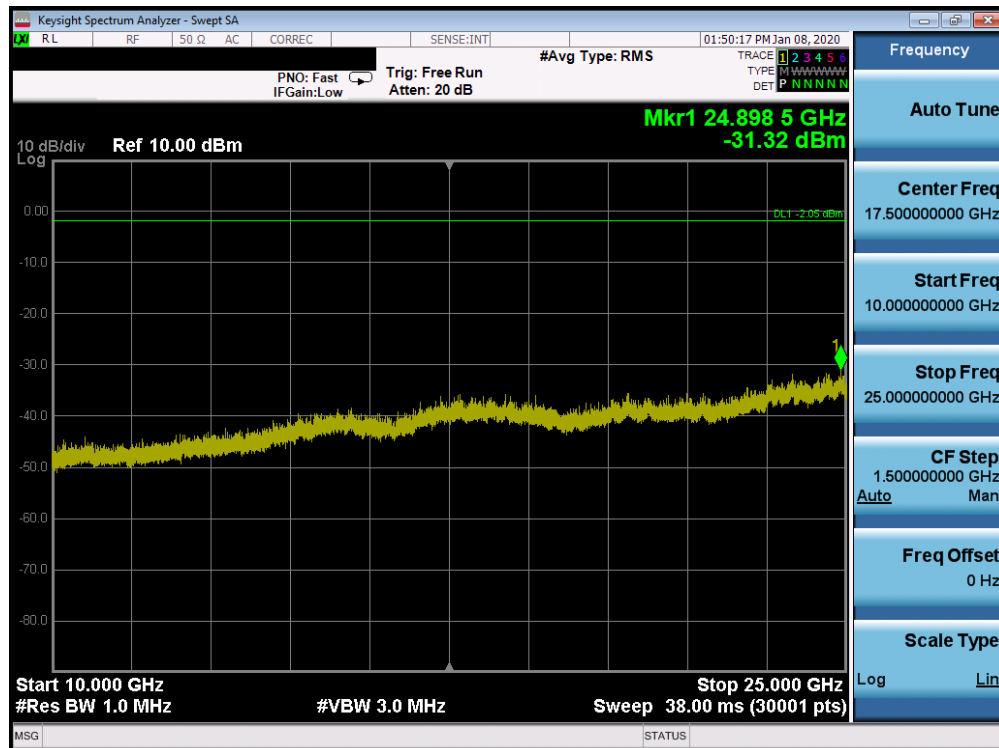


Plot 7-52. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 0)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 56 of 95                   |

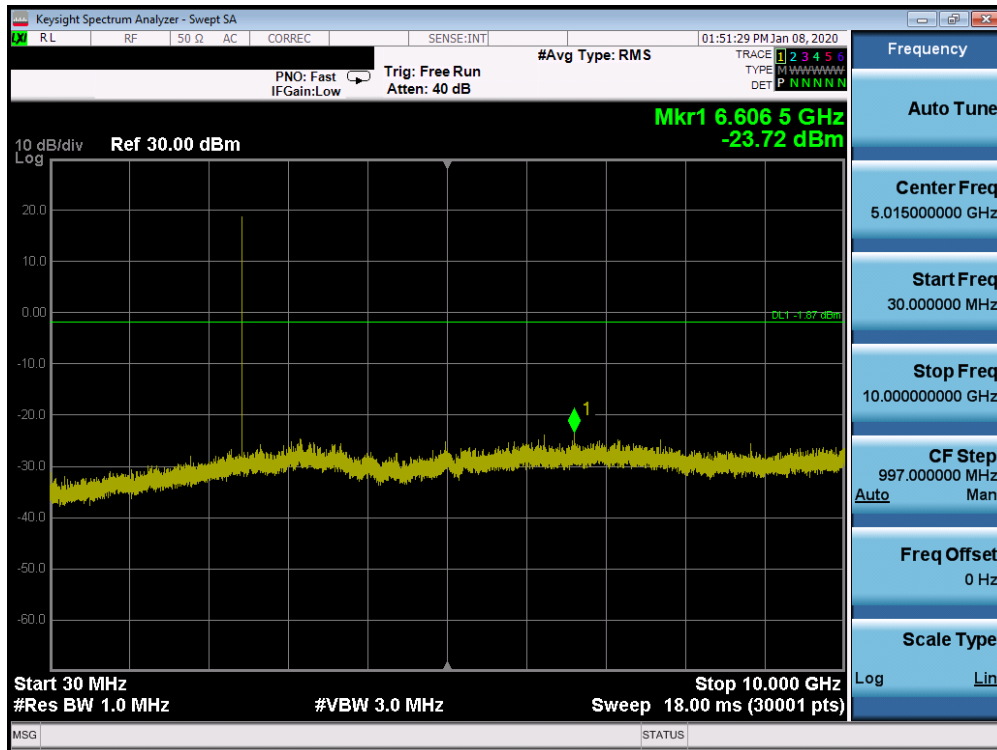


Plot 7-53. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 39)

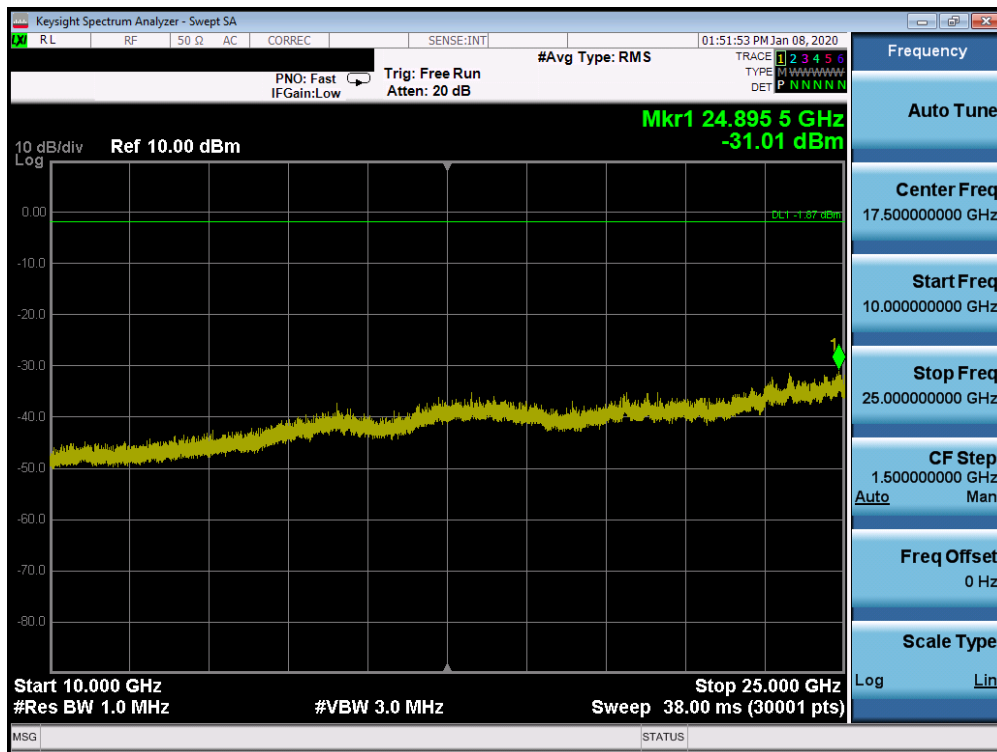


Plot 7-54. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA Ch. 39)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 57 of 95                   |

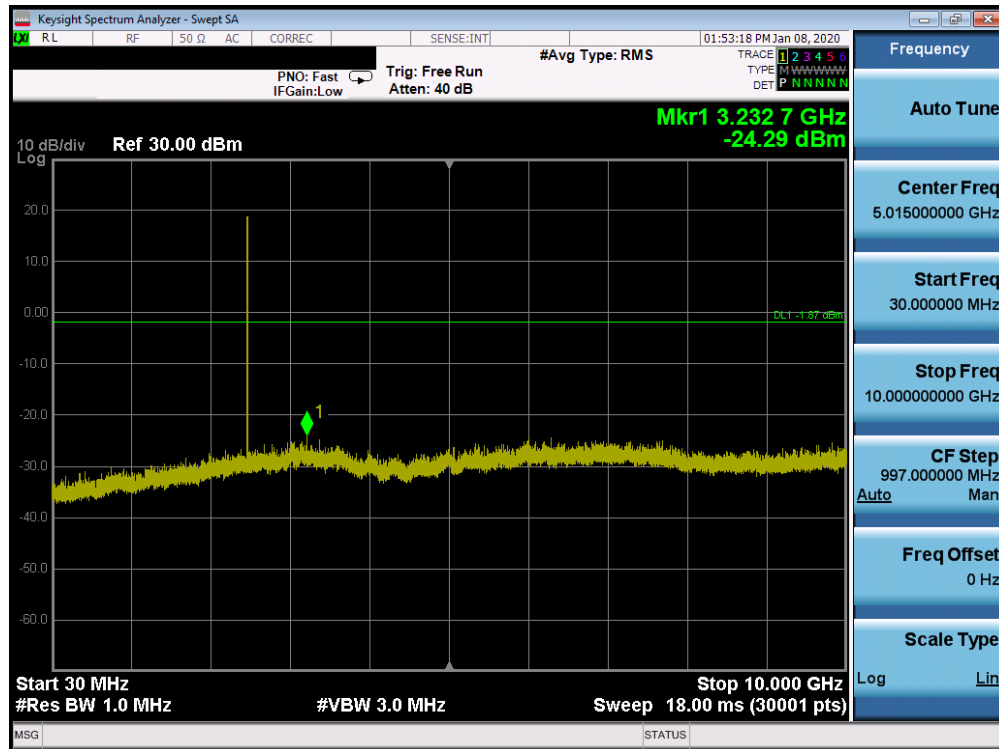

Plot 7-55. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 78)

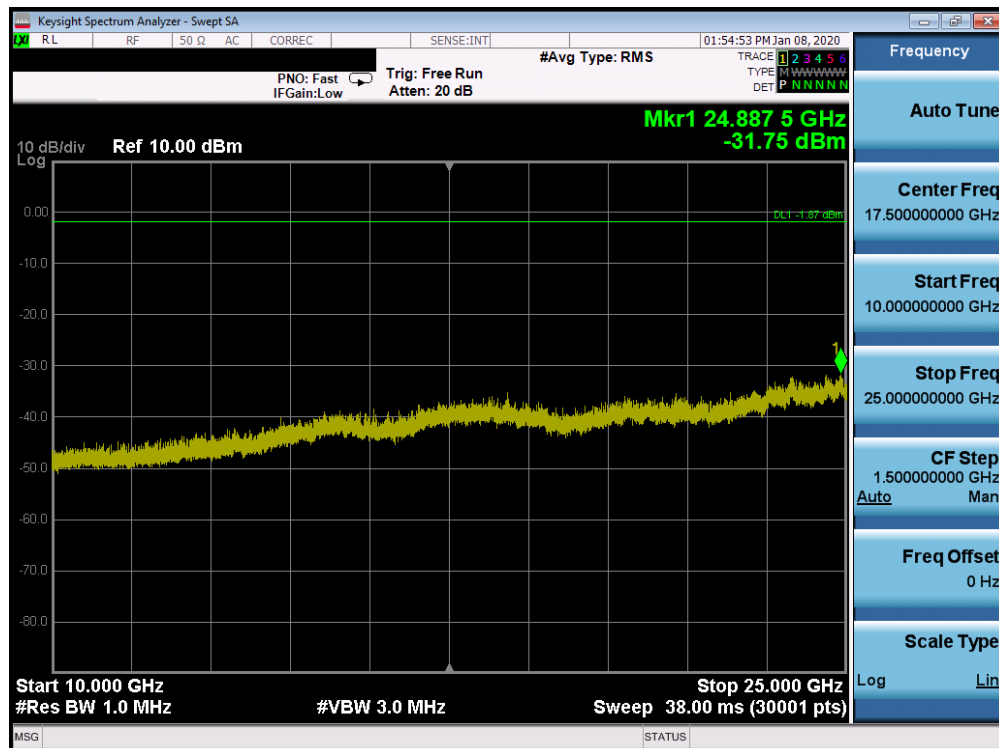

Plot 7-56. Conducted Spurious Plot Ant 2a (Bluetooth, GFSK, ePA – Ch. 78)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 58 of 95                   |

## 7.9 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

*All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-12 per Section 15.209 and RSS-Gen (8.9).*

| Frequency       | Field Strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[Meters] |
|-----------------|---------------------------------------|-------------------------------|
| Above 960.0 MHz | 500                                   | 3                             |

Table 7-12. Radiated Limits

### Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 59 of 95                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

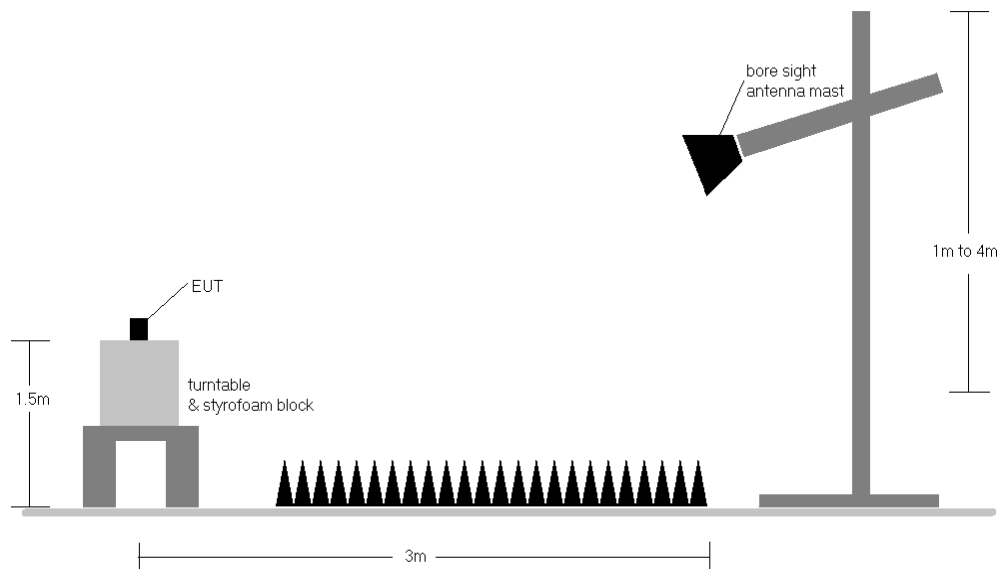

**Figure 7-8. Radiated Test Setup >1GHz**

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-12.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
5. The duty cycle correction factor was not applied to noise floor measurements.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. Both power schemes were investigated and only the worst case is reported

## Sample Calculation


- o Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m] + Duty Cycle Correction [dB]
- o AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- o Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 60 of 95                   |


## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


### Ant 4a

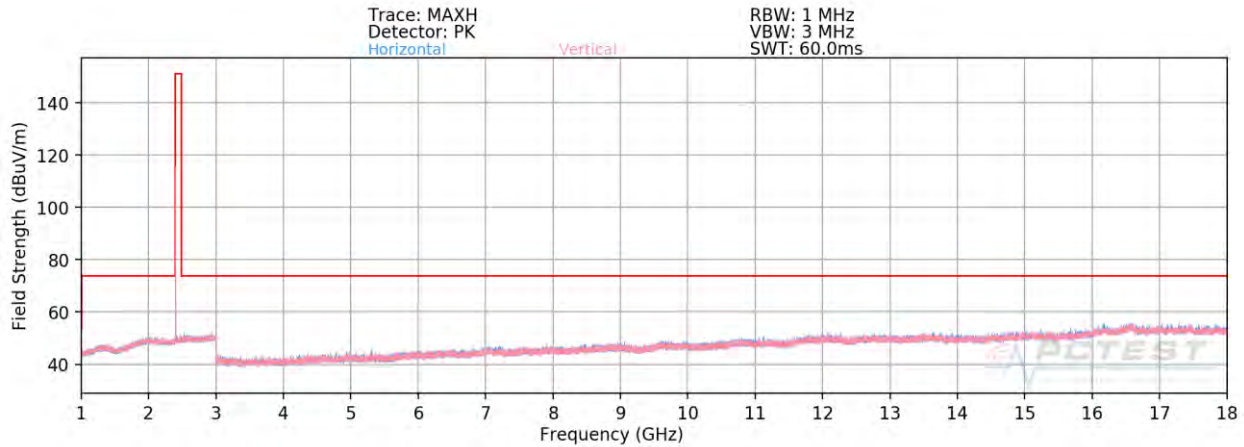

Plot 7-57. Radiated Spurious Plot above 1GHz Ant 4a (BT GFSK ePA – Ch. 0)

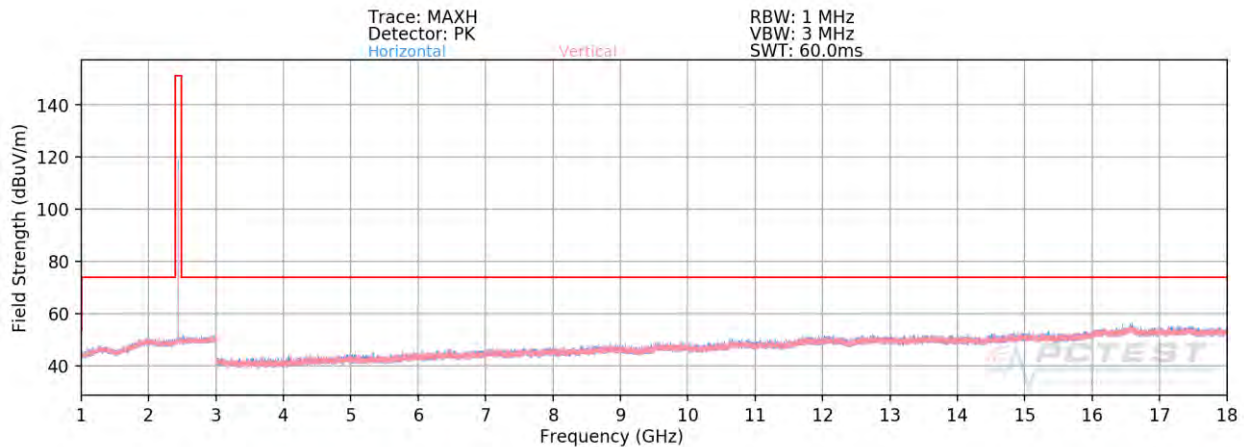

Plot 7-58. Radiated Spurious Plot above 1GHz Ant 4a (BT GFSK ePA – Ch. 39)

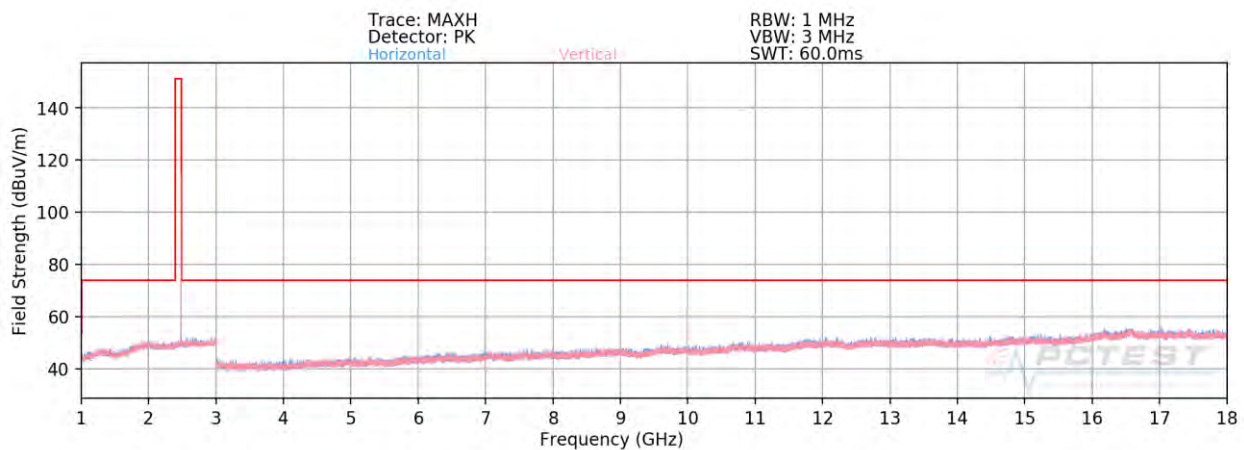


Plot 7-59. Radiated Spurious Plot above 1GHz Ant 4a (BT GFSK ePA – Ch. 78)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 61 of 95                   |


## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


### Ant 2a

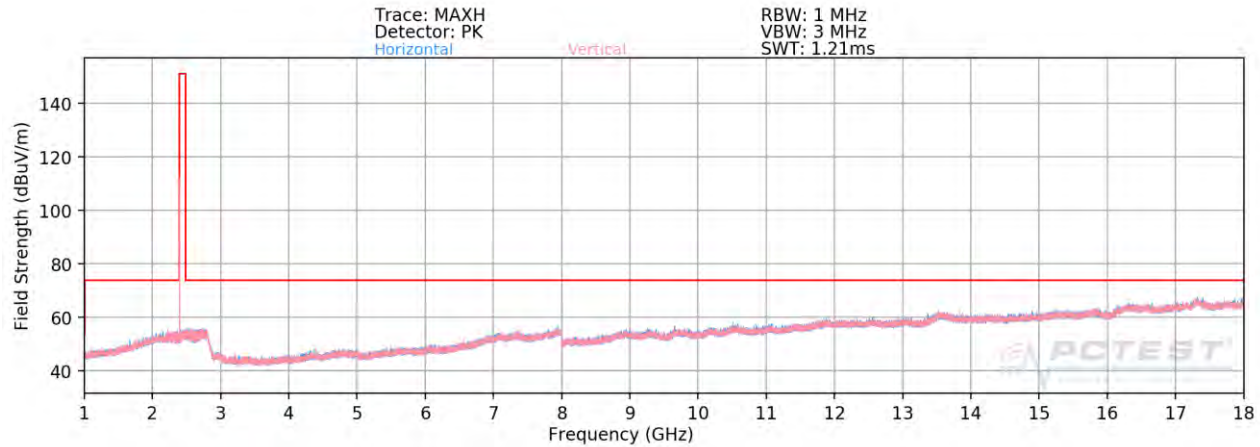

Plot 7-60. Radiated Spurious Plot above 1GHz Ant 2a (BT GFSK ePA – Ch. 0)

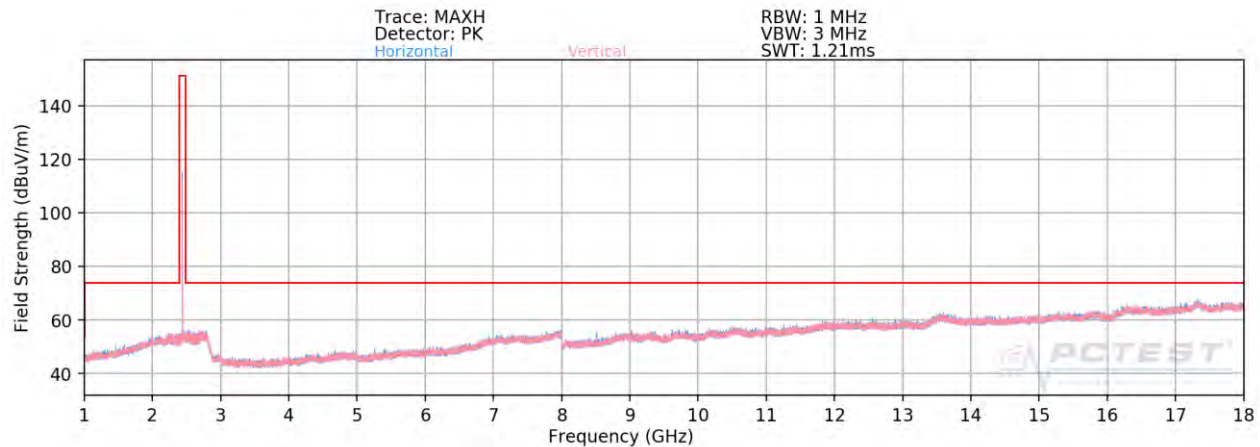

Plot 7-61. Radiated Spurious Plot above 1GHz Ant 2a (BT GFSK ePA – Ch. 39)

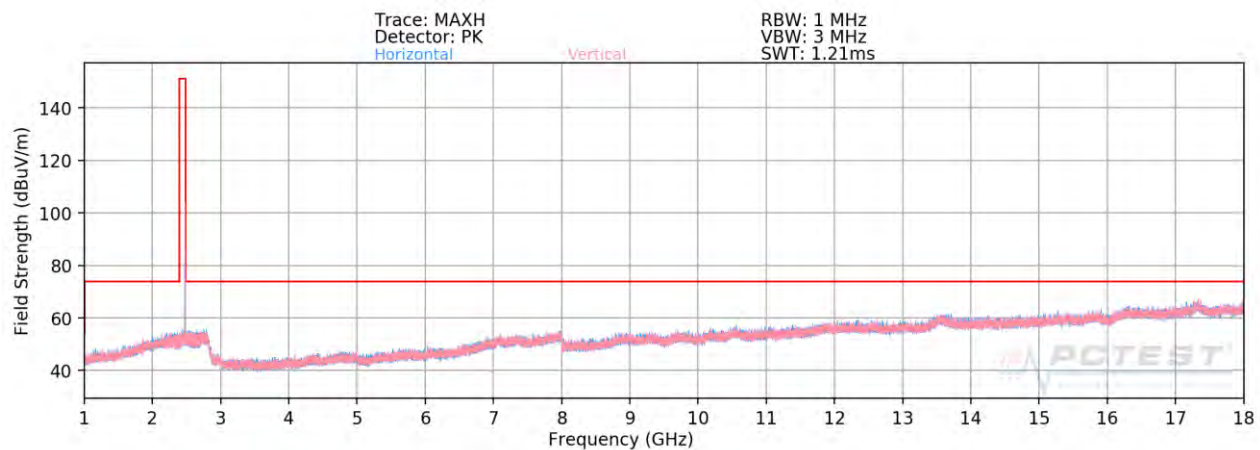


Plot 7-62. Radiated Spurious Plot above 1GHz Ant 2a (BT GFSK ePA – Ch. 78)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 62 of 95                   |


## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


### Tx-BF (Beamforming Mode)

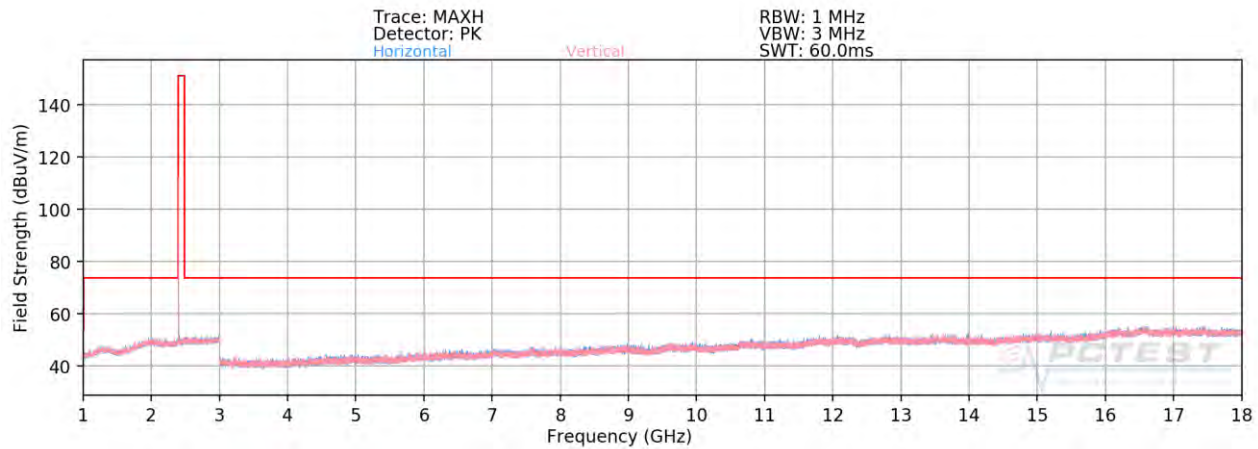

Plot 7-63. Radiated Spurious Plot above 1GHz TXBF (BT GFSK ePA – Ch. 0)

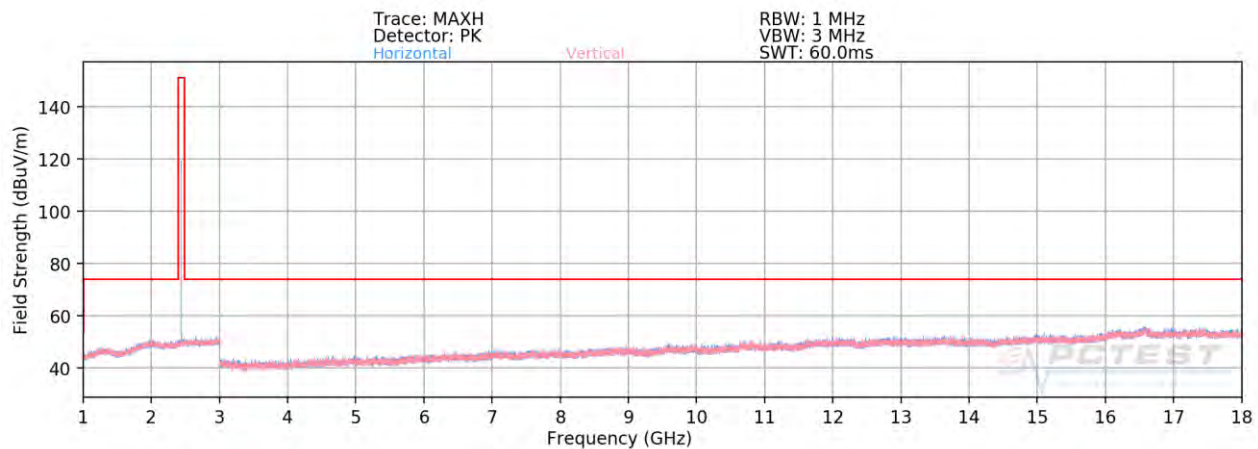

Plot 7-64. Radiated Spurious Plot above 1GHz TXBF (BT GFSK ePA – Ch. 39)

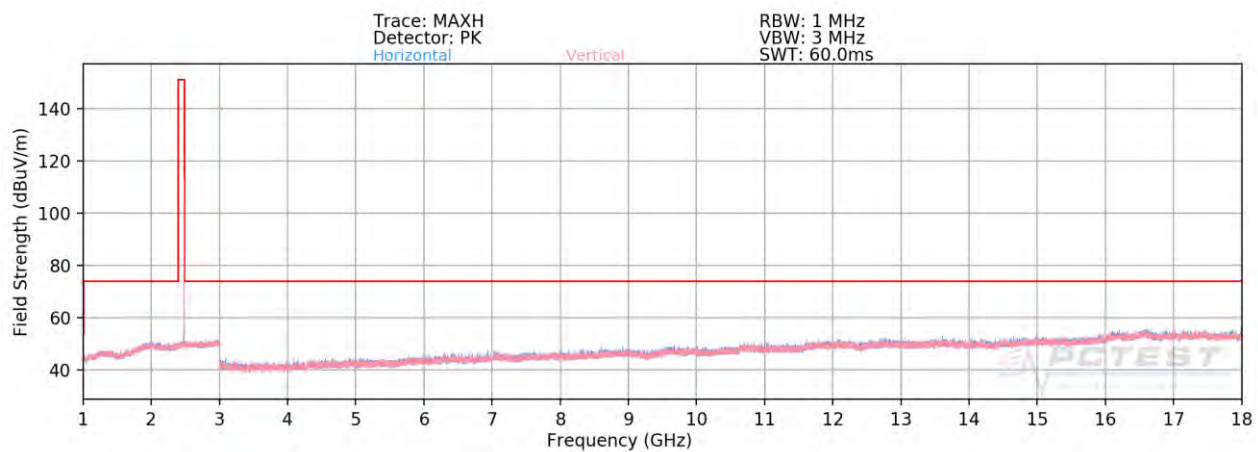


Plot 7-65. Radiated Spurious Plot above 1GHz TXBF (BT GFSK ePA – Ch. 78)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 63 of 95                   |




## Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

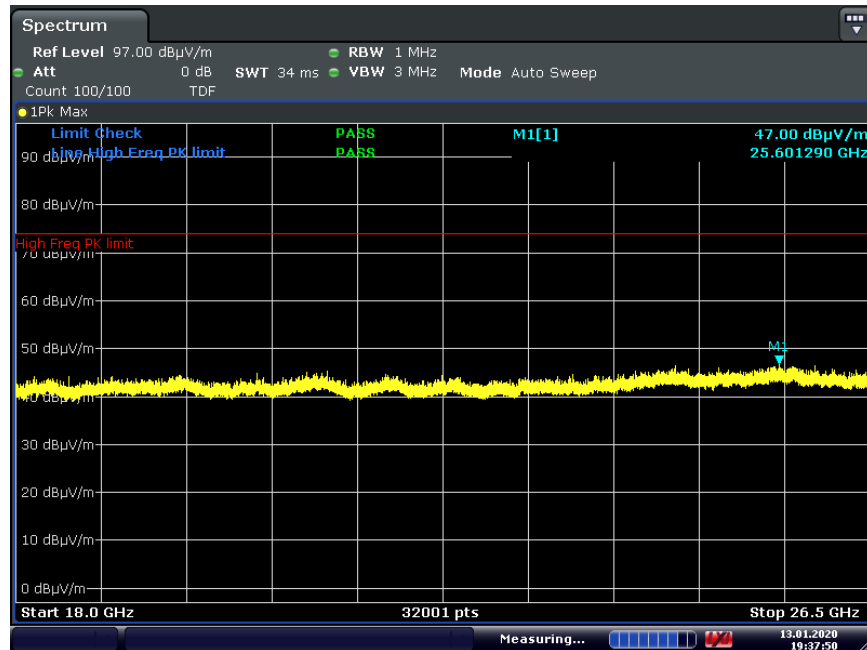

Plot 7-66. Radiated Spurious Plot above 18GHz TxBF (GFSK ePA, Pol. H)

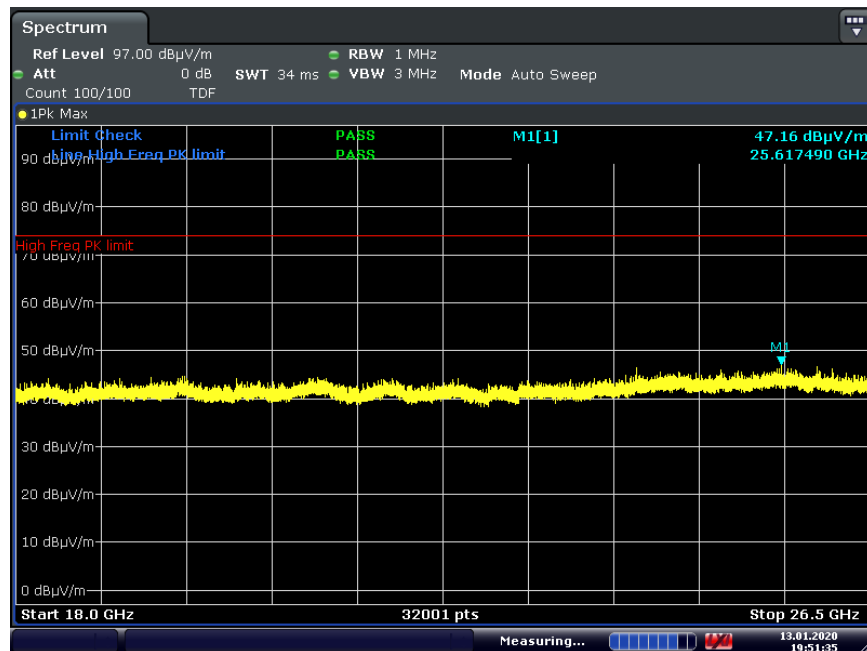

Plot 7-67. Radiated Spurious Plot above 18GHz TxBF (GFSK ePA, Pol. H)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 64 of 95                   |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Ant 4a

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2402MHz  
Channel: 0

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4804.00         | Avg      | H               | -                   | -                          | -77.90               | 5.39        | 34.49                   | 53.98          | -19.49      |
| 4804.00         | Peak     | H               | -                   | -                          | -68.18               | 5.39        | 44.21                   | 73.98          | -29.77      |
| 12010.00        | Avg      | H               | -                   | -                          | -82.57               | 14.50       | 38.93                   | 53.98          | -15.05      |
| 12010.00        | Peak     | H               | -                   | -                          | -70.92               | 14.50       | 50.58                   | 73.98          | -23.40      |

Table 7-13. Radiated Measurements

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2441MHz  
Channel: 39

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4882.00         | Avg      | H               | -                   | -                          | -79.82               | 5.46        | 32.64                   | 53.98          | -21.34      |
| 4882.00         | Peak     | H               | -                   | -                          | -67.76               | 5.46        | 44.70                   | 73.98          | -29.28      |
| 7323.00         | Avg      | H               | -                   | -                          | -81.25               | 9.00        | 34.75                   | 53.98          | -19.23      |
| 7323.00         | Peak     | H               | -                   | -                          | -69.48               | 9.00        | 46.52                   | 73.98          | -27.46      |
| 12205.00        | Avg      | H               | -                   | -                          | -82.43               | 14.88       | 39.45                   | 53.98          | -14.52      |
| 12205.00        | Peak     | H               | -                   | -                          | -69.93               | 14.88       | 51.95                   | 73.98          | -22.02      |

Table 7-14. Radiated Measurements

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 65 of 95                   |

## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 78

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4960.00         | Avg      | H               | -                   | -                          | -79.95               | 6.16        | 33.21                   | 53.98          | -20.77      |
| 4960.00         | Peak     | H               | -                   | -                          | -68.40               | 6.16        | 44.76                   | 73.98          | -29.22      |
| 7440.00         | Avg      | H               | -                   | -                          | -81.74               | 9.86        | 35.12                   | 53.98          | -18.86      |
| 7440.00         | Peak     | H               | -                   | -                          | -70.16               | 9.86        | 46.70                   | 73.98          | -27.28      |
| 12400.00        | Avg      | H               | -                   | -                          | -83.24               | 14.54       | 38.30                   | 53.98          | -15.68      |
| 12400.00        | Peak     | H               | -                   | -                          | -71.19               | 14.54       | 50.35                   | 73.98          | -23.63      |

Table 7-15. Radiated Measurements

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 66 of 95                   |

## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Ant 2a

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2402MHz  
Channel: 0

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4804.00         | Avg      | H               | 123                 | 300                        | -78.36               | 5.39        | 34.03                   | 53.98          | -19.95      |
| 4804.00         | Peak     | H               | 123                 | 300                        | -67.57               | 5.39        | 44.82                   | 73.98          | -29.16      |
| 12010.00        | Avg      | H               | -                   | -                          | -81.15               | 14.50       | 40.35                   | 53.98          | -13.63      |
| 12010.00        | Peak     | H               | -                   | -                          | -69.05               | 14.50       | 52.45                   | 73.98          | -21.53      |

Table 7-16. Radiated Measurements

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2441MHz  
Channel: 39

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4882.00         | Avg      | H               | -                   | -                          | -79.93               | 5.46        | 32.53                   | 53.98          | -21.45      |
| 4882.00         | Peak     | H               | -                   | -                          | -67.76               | 5.46        | 44.70                   | 73.98          | -29.28      |
| 7323.00         | Avg      | H               | -                   | -                          | -81.06               | 9.00        | 34.94                   | 53.98          | -19.04      |
| 7323.00         | Peak     | H               | -                   | -                          | -69.18               | 9.00        | 46.82                   | 73.98          | -27.16      |
| 12205.00        | Avg      | H               | -                   | -                          | -82.44               | 14.88       | 39.44                   | 53.98          | -14.53      |
| 12205.00        | Peak     | H               | -                   | -                          | -70.89               | 14.88       | 50.99                   | 73.98          | -22.98      |

Table 7-17. Radiated Measurements

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 67 of 95                   |

## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 78

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4960.00         | Avg      | H               | 268                 | 272                        | -79.97               | 6.16        | 33.19                   | 53.98          | -20.79      |
| 4960.00         | Peak     | H               | 268                 | 272                        | -67.43               | 6.16        | 45.73                   | 73.98          | -28.25      |
| 7440.00         | Avg      | H               | -                   | -                          | -81.73               | 9.86        | 35.13                   | 53.98          | -18.85      |
| 7440.00         | Peak     | H               | -                   | -                          | -70.25               | 9.86        | 46.61                   | 73.98          | -27.37      |
| 12400.00        | Avg      | H               | -                   | -                          | -83.18               | 14.54       | 38.36                   | 53.98          | -15.62      |
| 12400.00        | Peak     | H               | -                   | -                          | -71.56               | 14.54       | 49.98                   | 73.98          | -24.00      |

Table 7-18. Radiated Measurements

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 68 of 95                   |

## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Tx-BF (Beamforming Mode)

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2402MHz  
Channel: 0

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4804.00         | Avg      | H               | 113                 | 303                        | -78.01               | 5.39        | 11.88                   | 53.98          | -42.10      |
| 4804.00         | Peak     | H               | 113                 | 303                        | -67.41               | 5.39        | 44.98                   | 73.98          | -29.00      |
| 12010.00        | Avg      | H               | -                   | -                          | -82.56               | 14.50       | 38.94                   | 53.98          | -15.04      |
| 12010.00        | Peak     | H               | -                   | -                          | -70.97               | 14.50       | 50.53                   | 73.98          | -23.45      |

Table 7-19. Radiated Measurements

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2441MHz  
Channel: 39

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4882.00         | Avg      | H               | -                   | -                          | -79.72               | 5.46        | 32.74                   | 53.98          | -21.24      |
| 4882.00         | Peak     | H               | -                   | -                          | -68.03               | 5.46        | 44.43                   | 73.98          | -29.55      |
| 7323.00         | Avg      | H               | -                   | -                          | -81.05               | 9.00        | 34.95                   | 53.98          | -19.03      |
| 7323.00         | Peak     | H               | -                   | -                          | -69.39               | 9.00        | 46.61                   | 73.98          | -27.37      |
| 12205.00        | Avg      | H               | -                   | -                          | -82.35               | 14.88       | 39.53                   | 53.98          | -14.44      |
| 12205.00        | Peak     | H               | -                   | -                          | -70.65               | 14.88       | 51.23                   | 73.98          | -22.74      |

Table 7-20. Radiated Measurements

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 69 of 95                   |

## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth  
Worst Case Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 78

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4960.00         | Avg      | H               | 129                 | 306                        | -79.46               | 6.16        | 33.70                   | 53.98          | -20.28      |
| 4960.00         | Peak     | H               | 129                 | 306                        | -68.24               | 6.16        | 44.92                   | 73.98          | -29.06      |
| 7440.00         | Avg      | H               | -                   | -                          | -81.69               | 9.86        | 35.17                   | 53.98          | -18.81      |
| 7440.00         | Peak     | H               | -                   | -                          | -69.91               | 9.86        | 46.95                   | 73.98          | -27.03      |
| 12400.00        | Avg      | H               | -                   | -                          | -83.27               | 14.54       | 38.27                   | 53.98          | -15.71      |
| 12400.00        | Peak     | H               | -                   | -                          | -71.80               | 14.54       | 49.74                   | 73.98          | -24.24      |

Table 7-21. Radiated Measurements


|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 70 of 95                   |

## Simultaneous Tx Radiated Spurious Emission Measurements

§15.247 §15.205 & §15.209; RSS-Gen [8.9]


| Description               | Bluetooth | LTE            |
|---------------------------|-----------|----------------|
| Antenna                   | 4a        | 4a             |
| Channel                   | 6         | 39750          |
| Operating Frequency (MHz) | 2480      | 2506           |
| Mode/Modulation           | GFSK ePA  | QPSK/1RB/20MHz |

**Table 7-22. Worst Case Simultaneous Transmission Config**

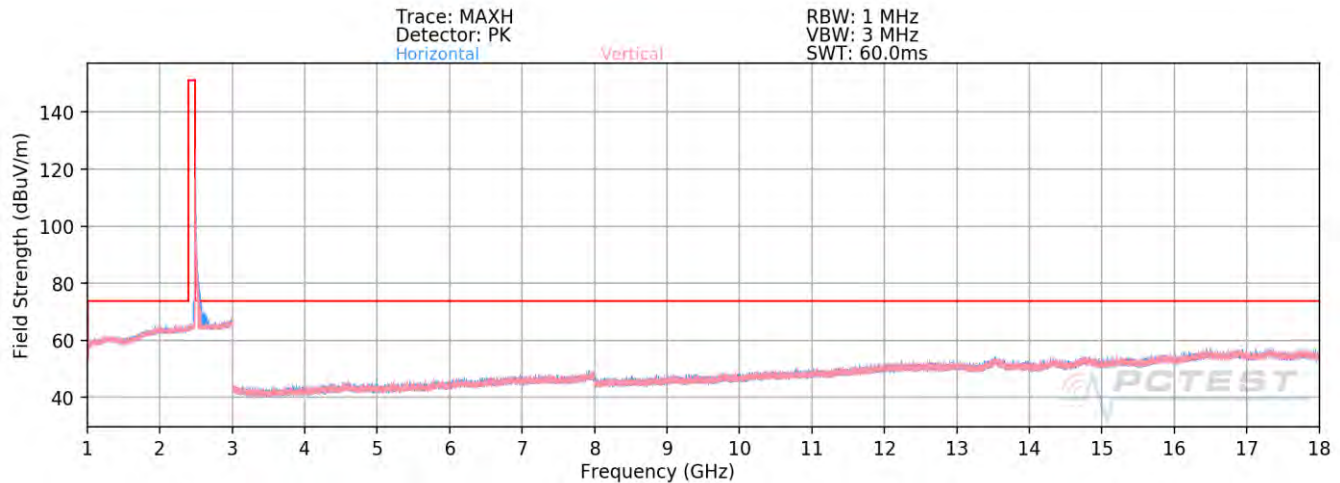


**Plot 7-68. Radiated Spurious Plot above 1GHz Simultaneous Tx**

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 71 of 95                   |

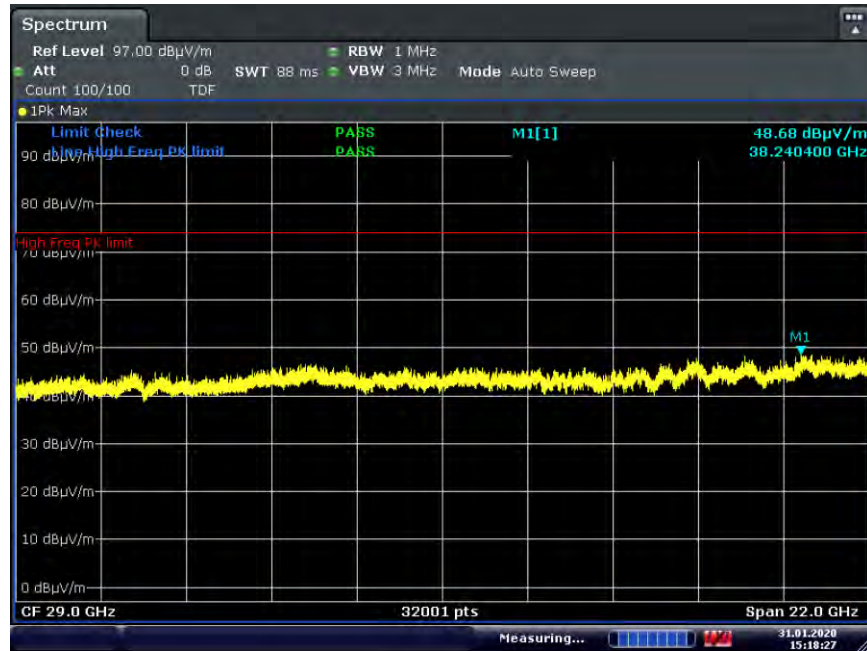

Plot 7-69. Radiated Spurious Plot Simultaneous Tx 18GHz– 40GHz Pol. H

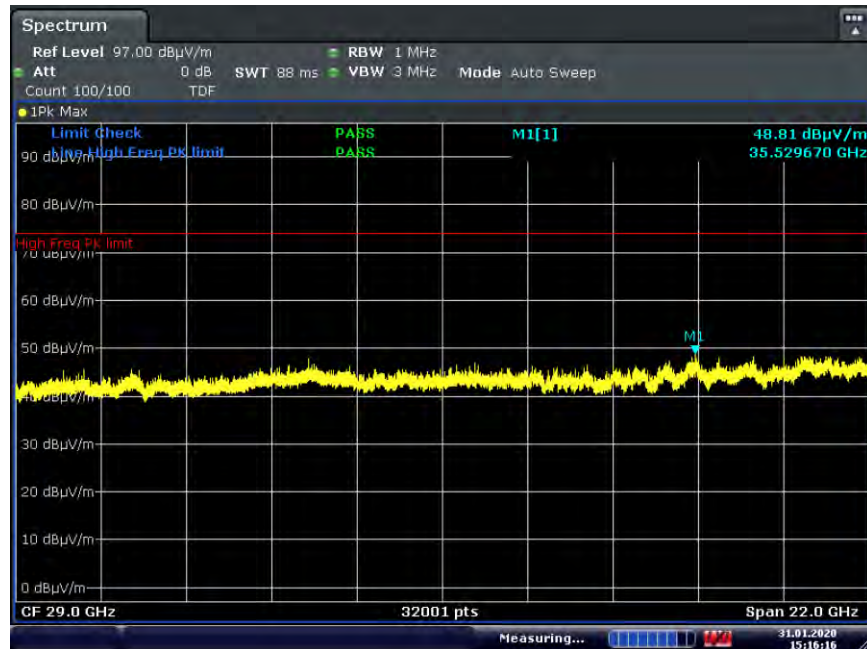

Plot 7-70. Radiated Spurious Plot Simultaneous Tx 18GHz– 40GHz Pol. V

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 72 of 95                   |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4960.00         | Avg      | H               | 123                 | 336                        | -74.12               | 4.50        | 37.38                   | 53.98          | -16.60      |
| 4960.00         | Peak     | H               | 123                 | 336                        | -63.26               | 4.50        | 48.24                   | 73.98          | -25.74      |
| 7440.00         | Avg      | H               | -                   | -                          | -79.83               | 8.84        | 36.01                   | 53.98          | -17.97      |
| 7440.00         | Peak     | H               | -                   | -                          | -68.46               | 8.84        | 47.38                   | 73.98          | -26.60      |
| 12400.00        | Avg      | H               | -                   | -                          | -84.71               | 18.33       | 40.62                   | 53.98          | -13.36      |
| 12400.00        | Peak     | H               | -                   | -                          | -73.88               | 18.33       | 51.45                   | 73.98          | -22.53      |

**Table 7-23. Radiated Measurements Simultaneous Tx**

|                                                |                                                                                     |                                               |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2232                        |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C1912170055-10.BCG | <b>Test Dates:</b><br>12/10/2019 - 02/20/2020                                       | <b>EUT Type:</b><br>Tablet Device             | Page 73 of 95                          |

## 7.10 Radiated Restricted Band Edge Measurement


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain + DCCF

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | GFSK      |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2402MHz   |
| Channel:                 | 0         |

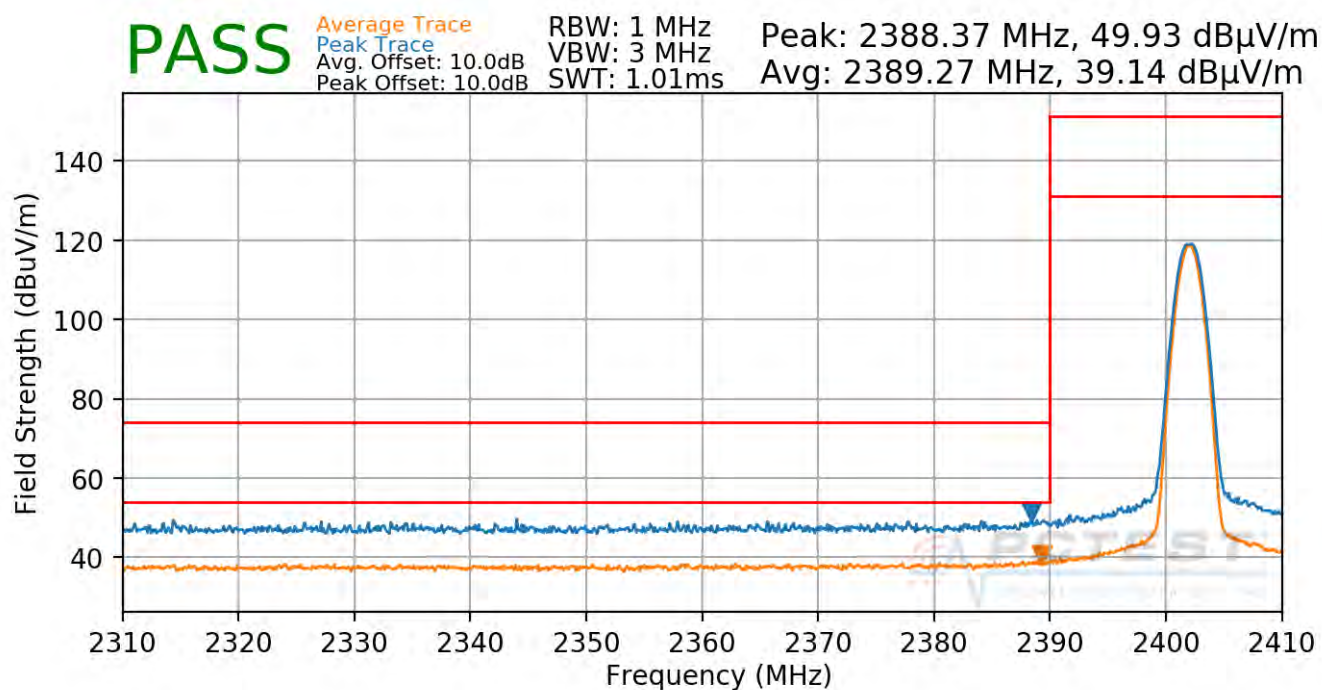

Plot 7-71. Radiated Restricted Lower Band Edge Measurement Ant 4a (Average & Peak)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 74 of 95                   |




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | 8DPSK     |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2402MHz   |
| Channel:                 | 0         |

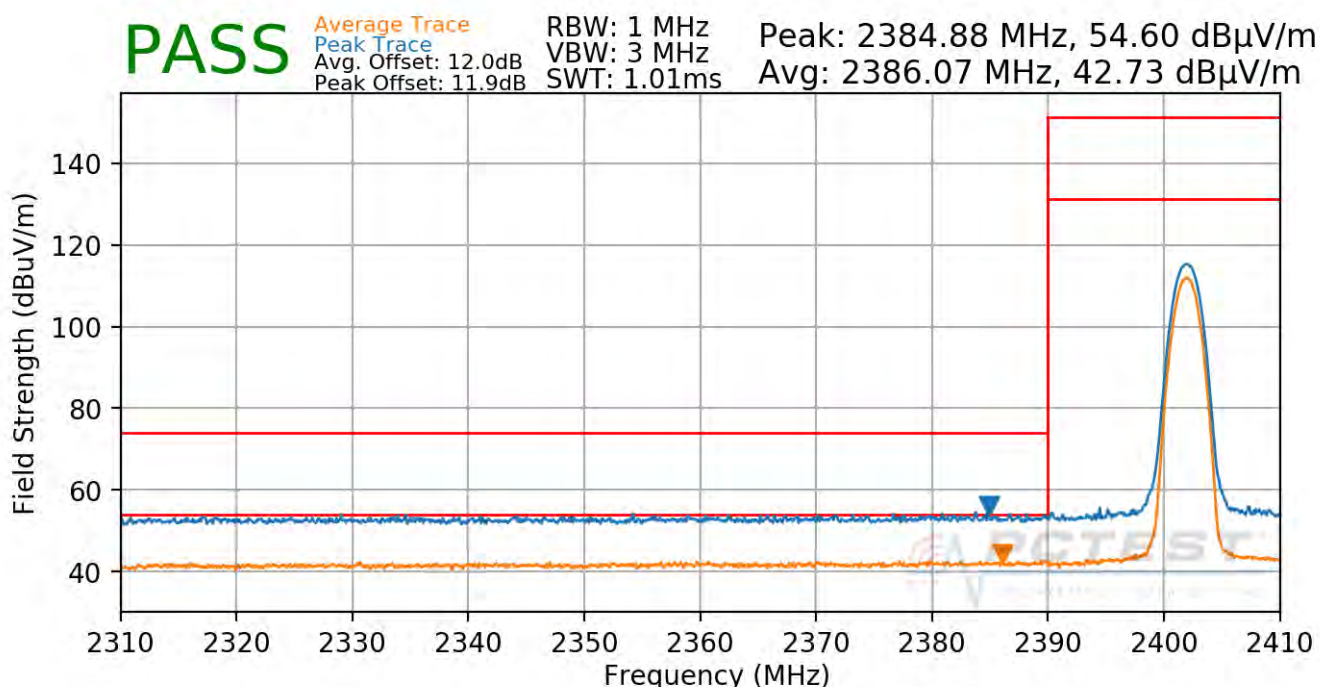

Plot 7-72. Radiated Restricted Lower Band Edge Measurement Ant 4a (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 75 of 95                   |

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

V 9.0 02/01/2019




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | GFSK      |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2480MHz   |
| Channel:                 | 78        |

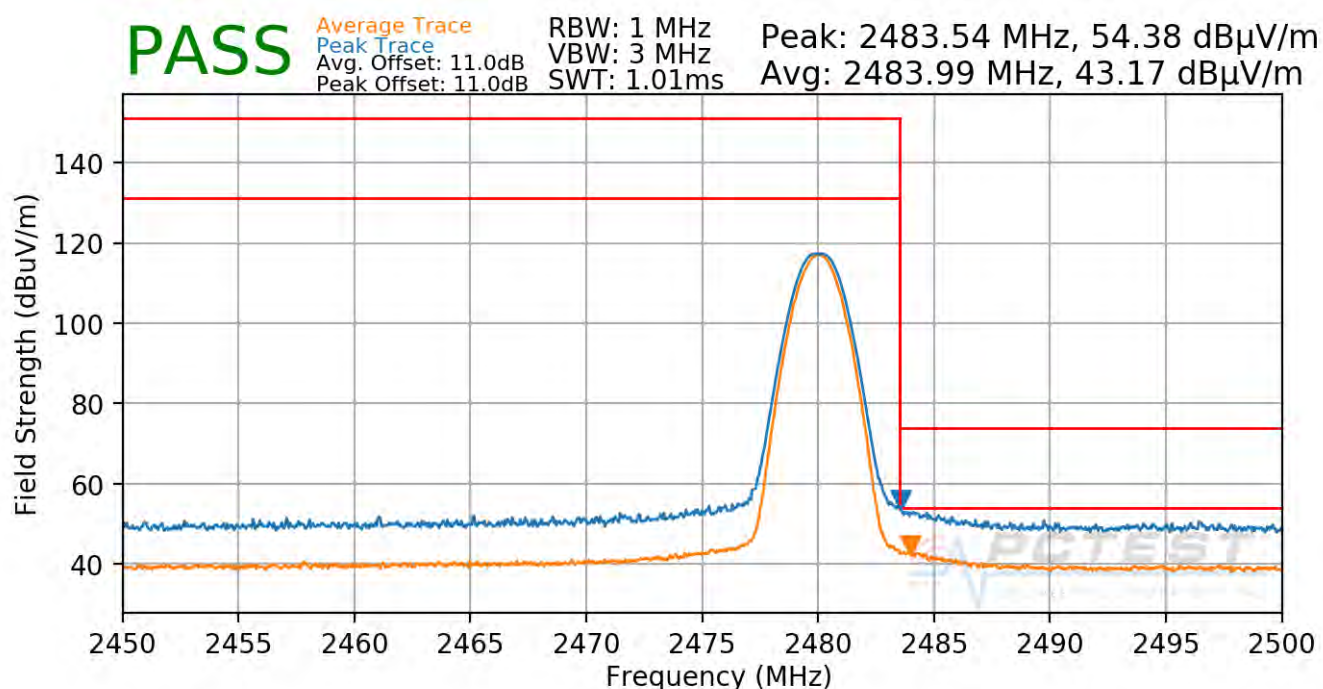

Plot 7-73. Radiated Restricted Upper Band Edge Measurement Ant 4a (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 76 of 95                   |

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

V 9.0 02/01/2019




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | 8DPSK     |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2480MHz   |
| Channel:                 | 78        |

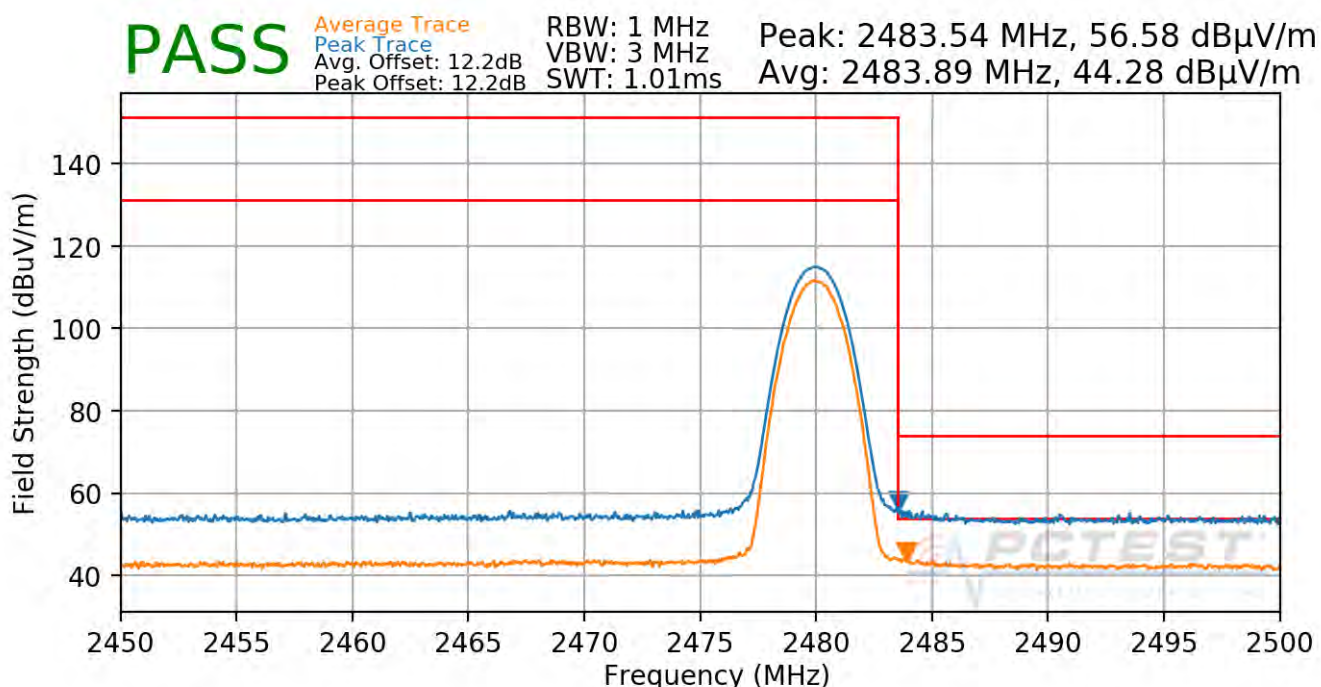

Plot 7-74. Radiated Restricted Upper Band Edge Measurement Ant 4a (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 77 of 95                   |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | GFSK      |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2402MHz   |
| Channel:                 | 0         |

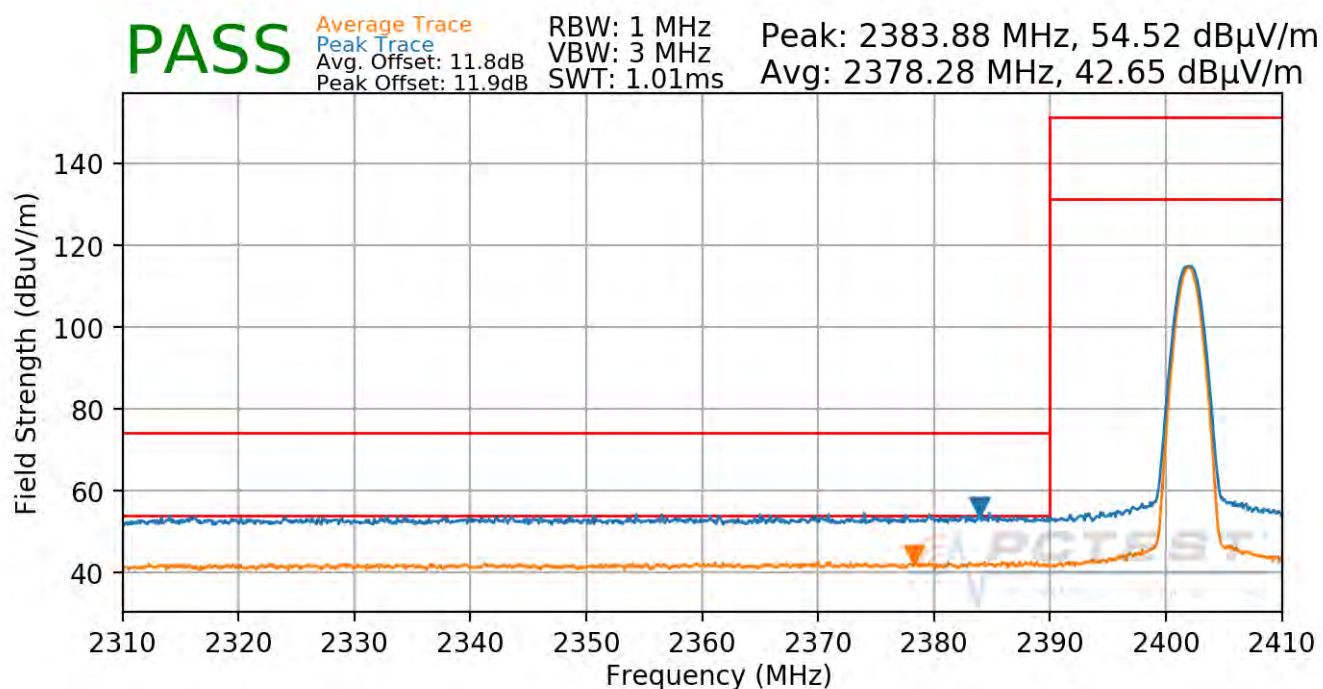

Plot 7-75. Radiated Restricted Lower Band Edge Measurement Ant 2a (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 78 of 95                   |

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

V 9.0 02/01/2019




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | 8DPSK     |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2402MHz   |
| Channel:                 | 0         |

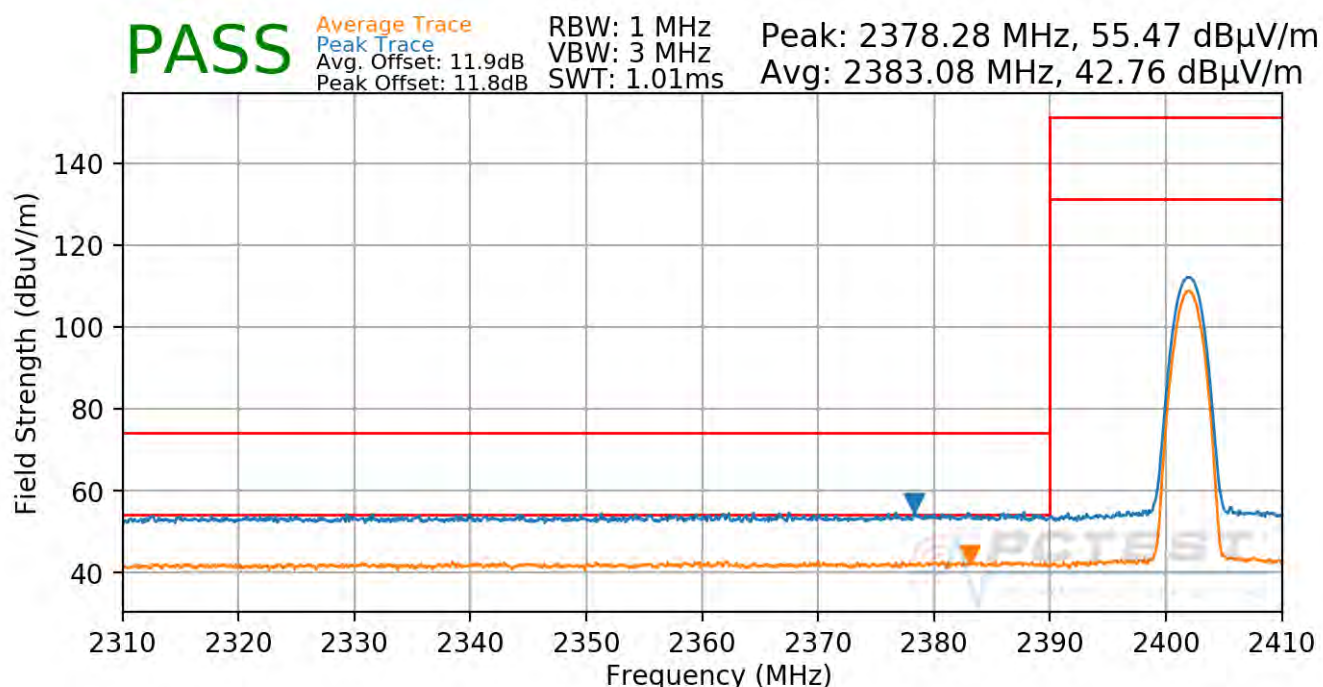

Plot 7-76. Radiated Restricted Lower Band Edge Measurement Ant 2a (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 79 of 95                   |

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

V 9.0 02/01/2019




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | GFSK      |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2480MHz   |
| Channel:                 | 78        |

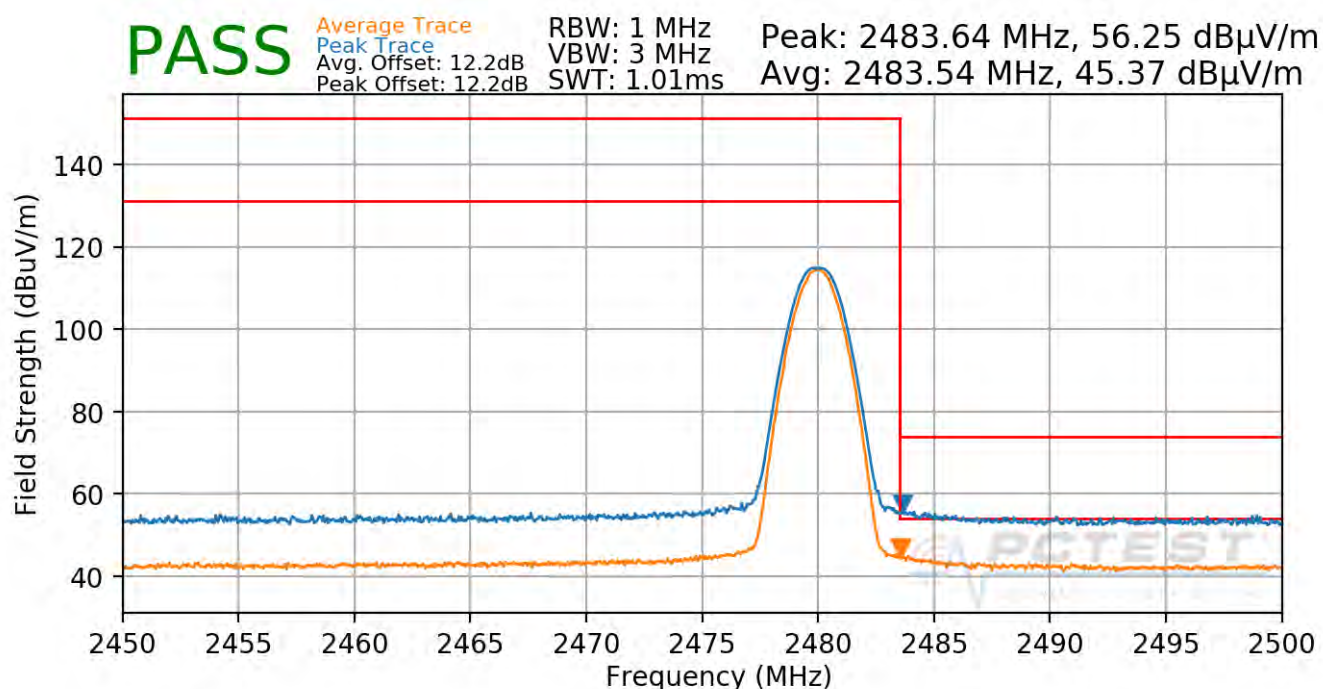

Plot 7-77. Radiated Restricted Upper Band Edge Measurement Ant 2a (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 80 of 95                   |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | 8DPSK     |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2480MHz   |
| Channel:                 | 78        |

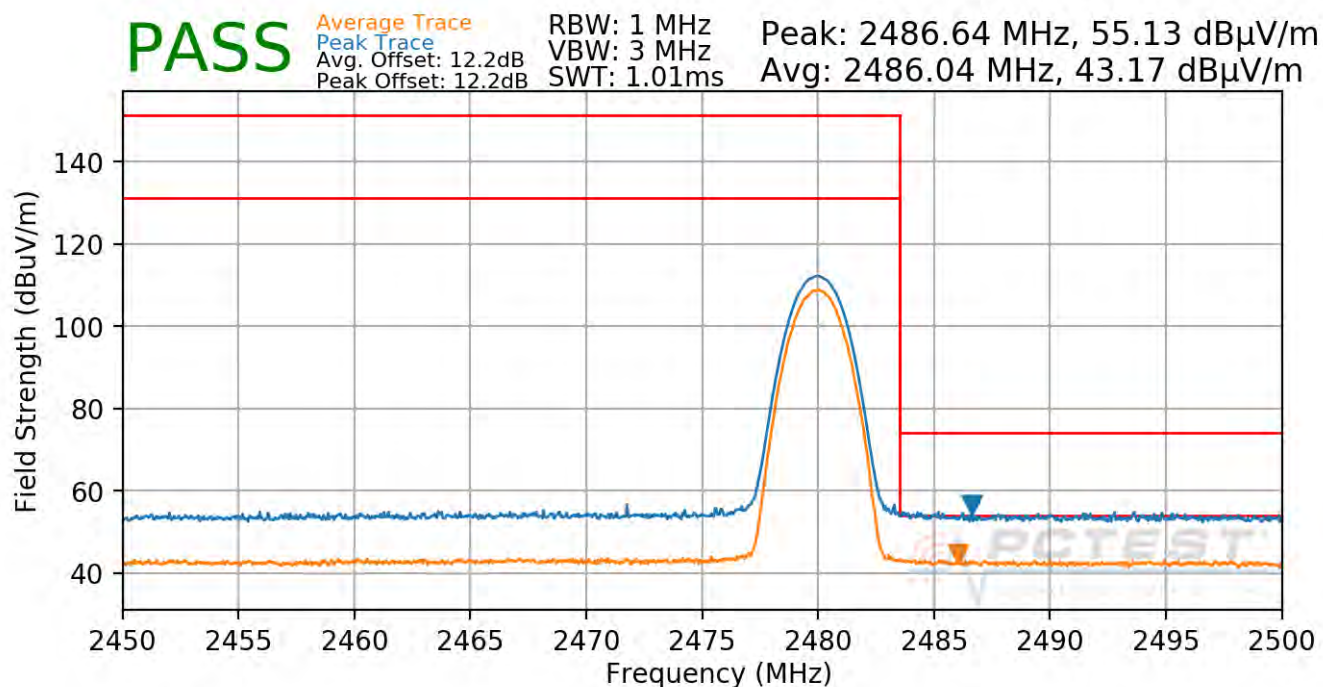

Plot 7-78. Radiated Restricted Upper Band Edge Measurement Ant 2a (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 81 of 95                   |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | GFSK      |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2402MHz   |
| Channel:                 | 0         |

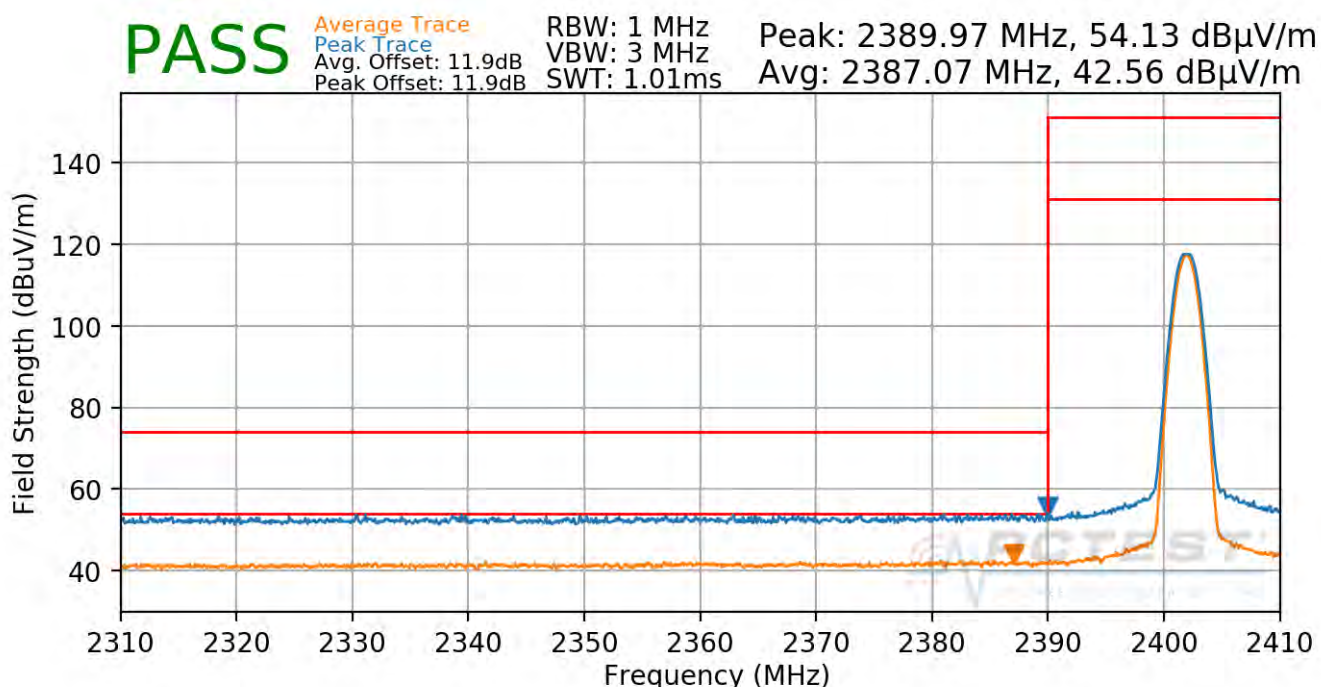

Plot 7-79. Radiated Restricted Lower Band Edge Measurement TXBF (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 82 of 95                   |

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

V 9.0 02/01/2019




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | 8DPSK     |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2402MHz   |
| Channel:                 | 0         |

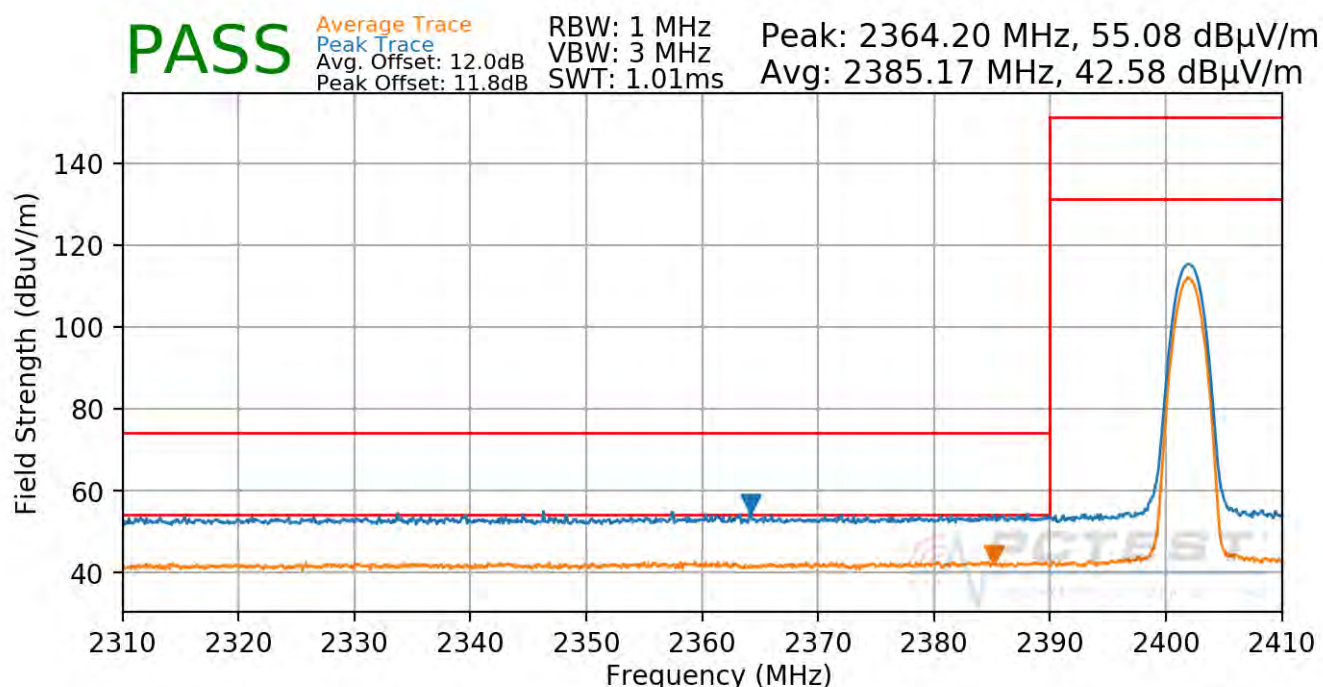

Plot 7-80. Radiated Restricted Lower Band Edge Measurement TXBF (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 83 of 95                   |

© 2020 PCTEST

V 9.0 02/01/2019  
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | GFSK      |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2480MHz   |
| Channel:                 | 78        |

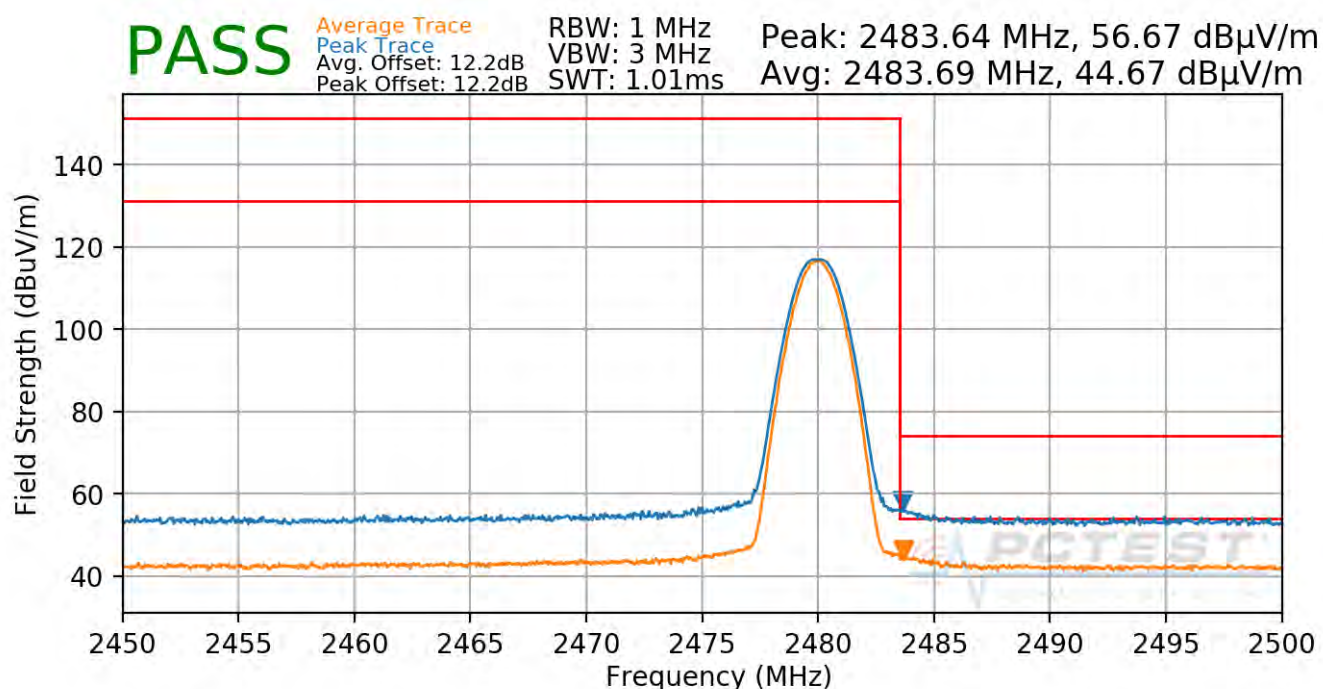

Plot 7-81. Radiated Restricted Upper Band Edge Measurement TXBF (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 84 of 95                   |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).




## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for peak measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                          |           |
|--------------------------|-----------|
| Worst Case Mode:         | Bluetooth |
| Worst Case Modulation:   | 8DPSK     |
| Worst Case Power Scheme: | ePA       |
| Measurement Distance:    | 3 Meters  |
| Operating Frequency:     | 2480MHz   |
| Channel:                 | 78        |

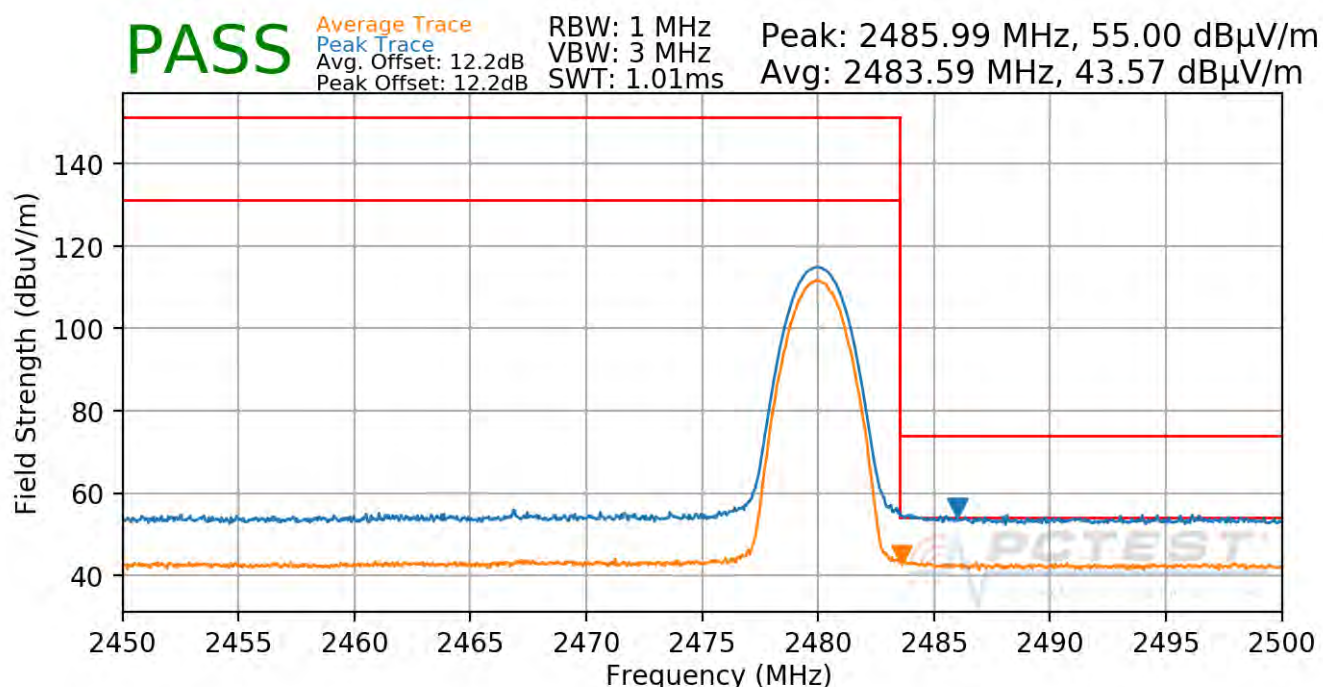

Plot 7-82. Radiated Restricted Upper Band Edge Measurement TXBF (Average & Peak)

|                                         |                                        |                                       |                                 |
|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |                                        | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020 | EUT Type:<br>Tablet Device            | Page 85 of 95                   |

© 2020 PCTEST

V 9.0 02/01/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@PCTEST.COM](mailto:INFO@PCTEST.COM).

## 7.11 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

*All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-24 per Section 15.209 and RSS-Gen (8.9).*

| Frequency         | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)             | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)            | 30                            |
| 1.705 – 30.00 MHz | 30                       | 30                            |
| 30.00 – 88.00 MHz | 100                      | 3                             |
| 88.00 – 216.0 MHz | 150                      | 3                             |
| 216.0 – 960.0 MHz | 200                      | 3                             |
| Above 960.0 MHz   | 500                      | 3                             |

**Table 7-24. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 86 of 95                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

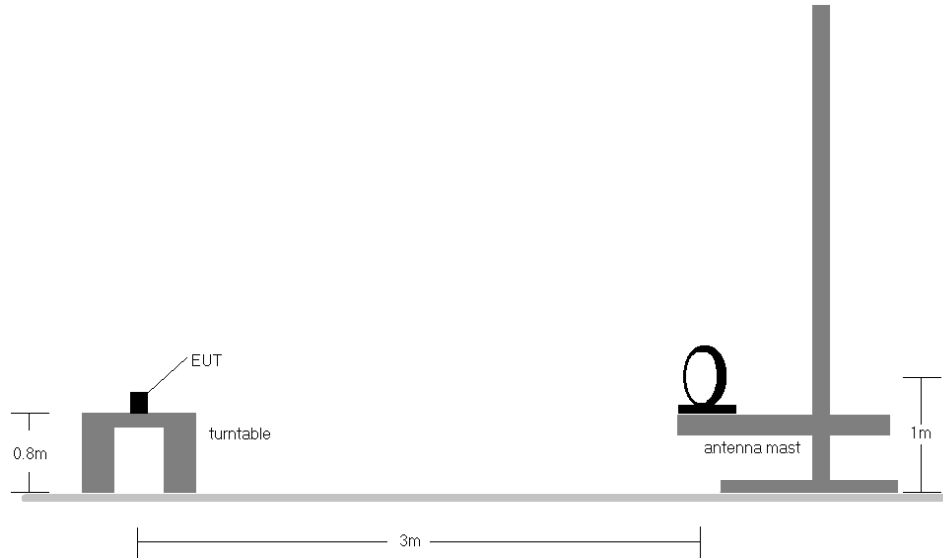

**Figure 7-9. Radiated Test Setup < 30MHz**

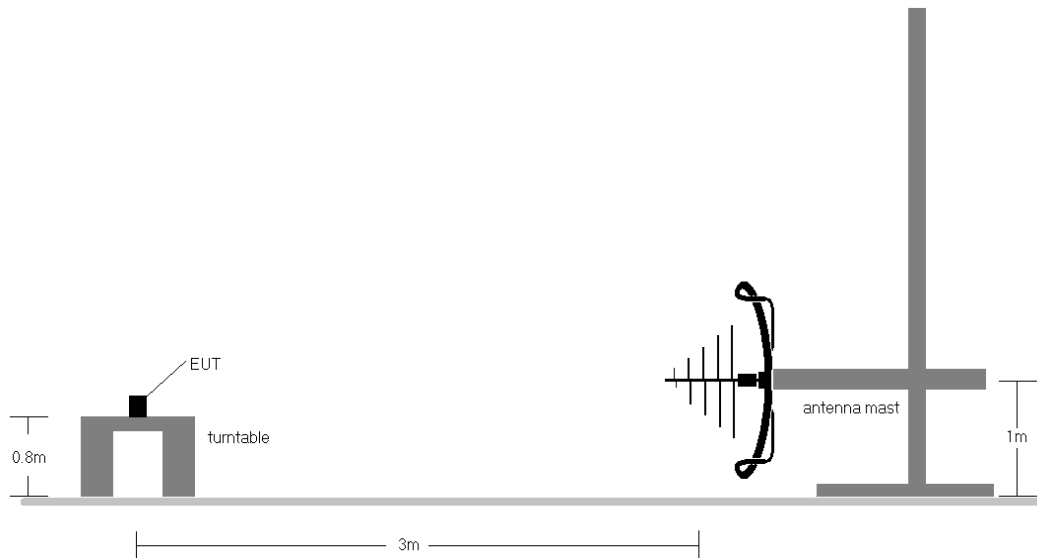

**Figure 7-10. Radiated Test Setup < 1GHz**

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 87 of 95                   |


## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-24.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
10. The unit was tested with all possible mode and power schemes and only the highest emission is reported.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 88 of 95                   |

## Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

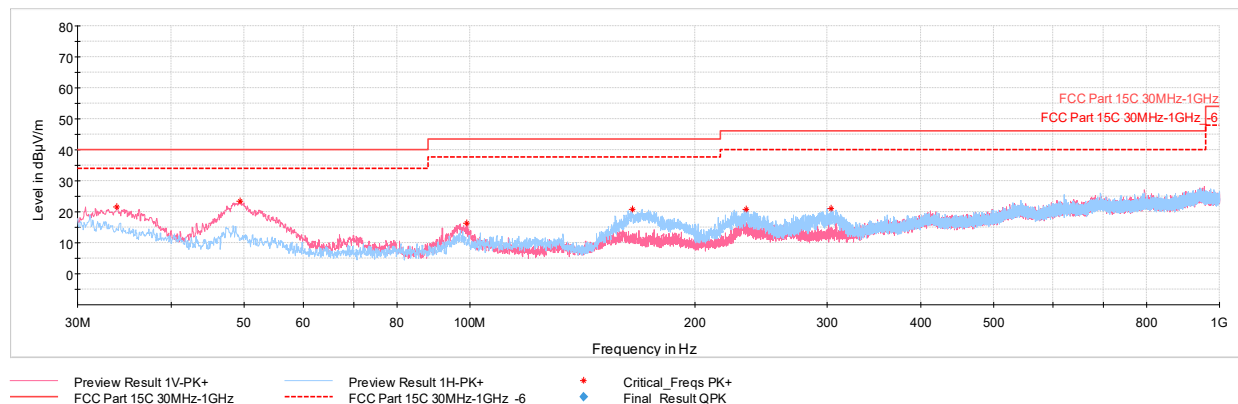

**Plot 7-83. Radiated Spurious Plot below 1GHz GFSK ePA TxBF – Ch.39 , with AC/DC Adapter)**


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 33.88           | Max Peak | V               | 100                 | 273                        | -71.45               | -13.96      | 21.59                   | 40.00          | -18.41      |
| 49.40           | Max Peak | V               | 100                 | 309                        | -62.30               | -21.31      | 23.39                   | 40.00          | -16.61      |
| 99.06           | Max Peak | V               | 100                 | 246                        | -70.90               | -19.82      | 16.28                   | 43.52          | -27.24      |
| 164.73          | Max Peak | H               | 100                 | 97                         | -68.47               | -17.63      | 20.90                   | 43.52          | -22.62      |
| 233.89          | Max Peak | H               | 100                 | 84                         | -71.14               | -15.06      | 20.80                   | 46.02          | -25.22      |
| 303.35          | Max Peak | H               | 100                 | 266                        | -72.60               | -13.35      | 21.05                   | 46.02          | -24.97      |

**Table 7-25. Radiated Spurious Emissions Below 1GHz GFSK ePA TxBF – Ch.39, with AC/DC Adapter)**

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 89 of 95                   |

## Simultaneous TX Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

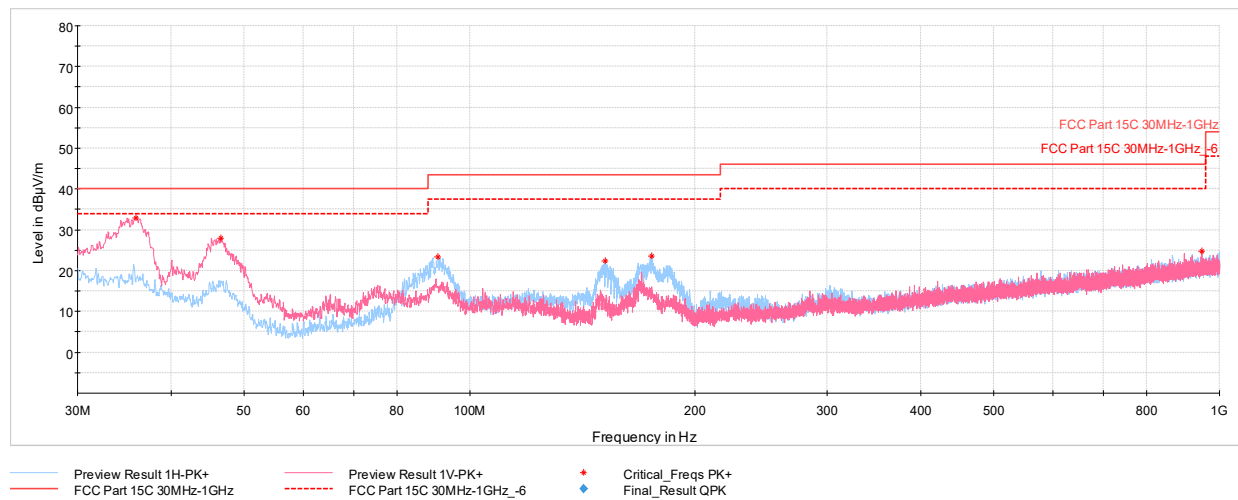

**Plot 7-84. Radiated Spurious Plot below 1GHz Simultaneous Tx, with AC/DC Adapter**

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 35.87           | Max Peak | V               | 100                 | 334                        | -62.12               | -11.94      | 32.94                   | 40.00          | -7.06       |
| 46.64           | Max Peak | V               | 100                 | 18                         | -60.23               | -18.86      | 27.91                   | 40.00          | -12.09      |
| 90.77           | Max Peak | H               | 250                 | 226                        | -65.54               | -18.18      | 23.28                   | 43.52          | -20.24      |
| 151.64          | Max Peak | H               | 250                 | 280                        | -65.48               | -19.14      | 22.38                   | 43.52          | -21.14      |
| 175.06          | Max Peak | H               | 100                 | 262                        | -66.83               | -16.60      | 23.57                   | 43.52          | -19.96      |
| 947.09          | Max Peak | V               | 250                 | 156                        | -78.44               | -3.87       | 24.69                   | 46.02          | -21.33      |

**Table 7-26. Radiated Spurious Emissions Below 1GHz Simultaneous Tx, with AC/DC Adapter**

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 90 of 95                   |

## 7.12 AC Line Conducted Measurement Data

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

| Frequency of emission (MHz) | Conducted Limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15 – 0.5                  | 66 to 56*              | 56 to 46* |
| 0.5 – 5                     | 56                     | 46        |
| 5 – 30                      | 60                     | 50        |

**Table 7-27. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 91 of 95                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

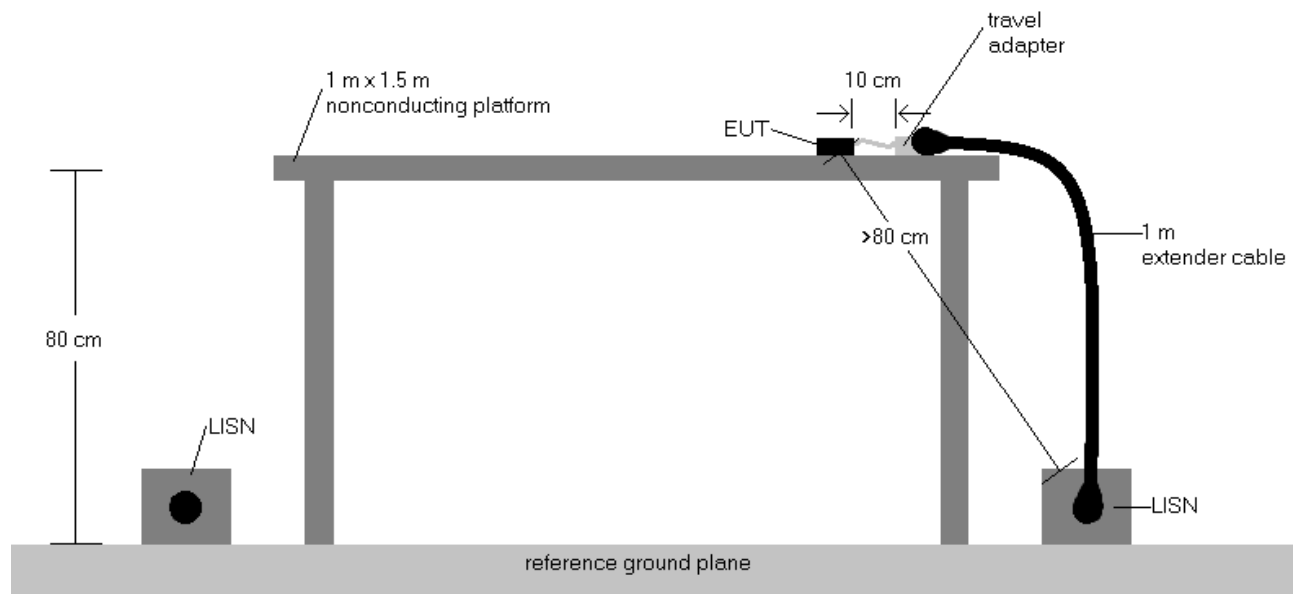


**Figure 7-11. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using quasi-peak and average detectors.
7. Deviations to the Specifications: None.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 92 of 95                   |

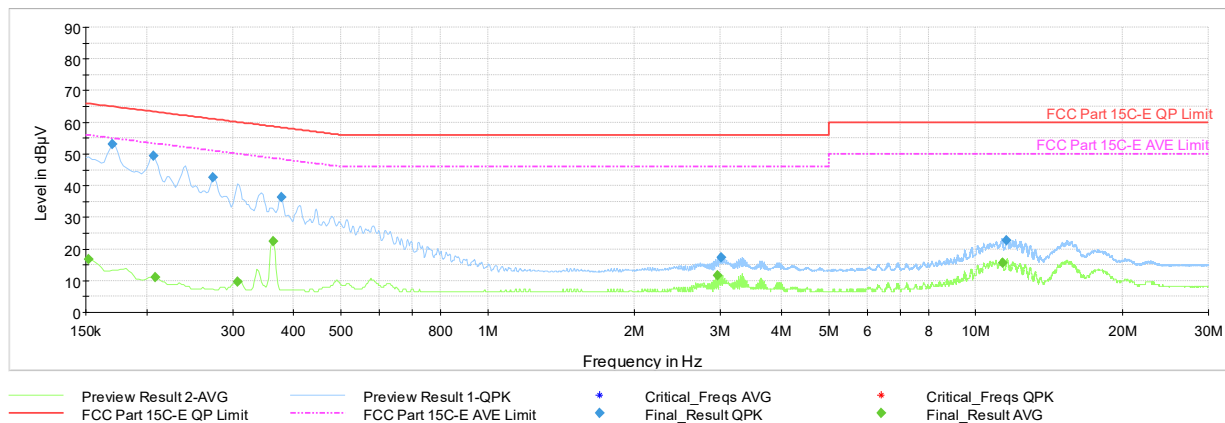


**Plot 7-85. Line-Conducted Test Plot- Ch.39 TxBF (L1, with Laptop)**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.152           | FINAL         | —                | 16.87          | 55.88        | -39.01      | L1   | GND |
| 0.170           | FINAL         | 53.03            | —              | 64.95        | -11.92      | L1   | GND |
| 0.206           | FINAL         | 49.52            | —              | 63.36        | -13.83      | L1   | GND |
| 0.209           | FINAL         | —                | 11.17          | 53.27        | -42.10      | L1   | GND |
| 0.274           | FINAL         | 42.68            | —              | 61.00        | -18.32      | L1   | GND |
| 0.308           | FINAL         | —                | 9.62           | 50.04        | -40.41      | L1   | GND |
| 0.364           | FINAL         | —                | 22.34          | 48.64        | -26.30      | L1   | GND |
| 0.377           | FINAL         | 36.35            | —              | 58.34        | -21.99      | L1   | GND |
| 2.954           | FINAL         | —                | 11.66          | 46.00        | -34.34      | L1   | GND |
| 3.005           | FINAL         | 17.34            | —              | 56.00        | -38.66      | L1   | GND |
| 11.342          | FINAL         | —                | 15.64          | 50.00        | -34.36      | L1   | GND |
| 11.578          | FINAL         | 22.63            | —              | 60.00        | -37.37      | L1   | GND |

**Table 7-28. Line-Conducted Test Data- Ch.39 TxBF (L1, with Laptop)**

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                                                                            | EUT Type:<br>Tablet Device | Page 93 of 95                   |

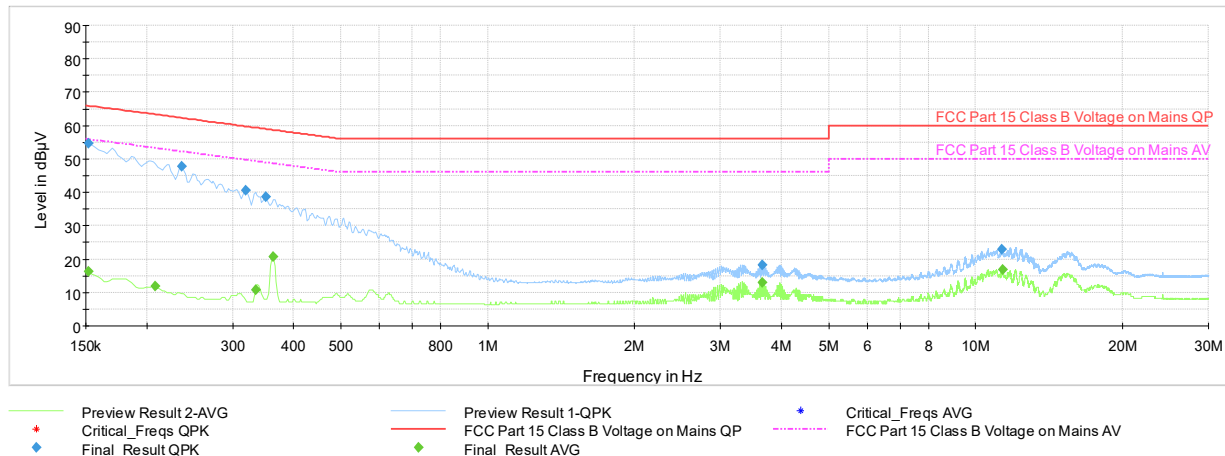

**Plot 7-86. Line-Conducted Test Plot- Ch.39 TxBF (N, with Laptop)**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.152           | FINAL         | 54.74            | —              | 65.88        | -11.13      | N    | GND |
| 0.152           | FINAL         | —                | 16.40          | 55.88        | -39.48      | N    | GND |
| 0.209           | FINAL         | —                | 11.81          | 53.27        | -41.45      | N    | GND |
| 0.236           | FINAL         | 47.64            | —              | 62.25        | -14.61      | N    | GND |
| 0.319           | FINAL         | 40.57            | —              | 59.74        | -19.17      | N    | GND |
| 0.335           | FINAL         | —                | 10.71          | 49.34        | -38.63      | N    | GND |
| 0.350           | FINAL         | 38.61            | —              | 58.96        | -20.34      | N    | GND |
| 0.364           | FINAL         | —                | 20.73          | 48.64        | -27.91      | N    | GND |
| 3.658           | FINAL         | 18.34            | —              | 56.00        | -37.66      | N    | GND |
| 3.660           | FINAL         | —                | 12.95          | 46.00        | -33.05      | N    | GND |
| 11.333          | FINAL         | 23.04            | —              | 60.00        | -36.96      | N    | GND |
| 11.339          | FINAL         | —                | 16.95          | 50.00        | -33.05      | N    | GND |

**Table 7-29. Line-Conducted Test Data- Ch.39 TxBF (N, with Laptop)**

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 94 of 95                   |

## 8. CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2232** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2232                        |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1912170055-10.BCG | Test Dates:<br>12/10/2019 - 02/20/2020                                              | EUT Type:<br>Tablet Device            | Page 95 of 95                   |