

# FCC and ISEDC Test Report

Apple Inc, Model: A2304

In accordance with FCC 47 CFR Part 15C,  
ISEDC RSS-247 and ISEDC RSS-GEN

Prepared for: Apple Inc.  
One Apple Park Way  
Cupertino, California 95014  
USA

FCC ID: BCGA2304

IC: 579C-A2304

## COMMERCIAL-IN-CONFIDENCE

Document 75945250-10 Issue 01



Add value.  
Inspire trust.

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Matthew Russell	RF Team Leader	Authorised Signatory	22 November 2019

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISEDC RSS-247 and ISEDC RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Mehadi Choudhury	22 November 2019	
Testing	George Porter	22 November 2019	
Testing	Cristian Onaca	22 November 2019	
Testing	Malik Mohammad	22 November 2019	
Testing	Jay Balendrarajah	22 November 2019	
Testing	Ahmad Javid	22 November 2019	
Testing	Faisal Malyar	22 November 2019	

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

Industry Canada Accreditation  
12669A Octagon House, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2018, ISEDC RSS-247: Issue 2 (2017-02) and ISEDC RSS-GEN: Issue 5 A1 (2019-03) for the tests detailed in section 1.3.



#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2019 TÜV SÜD. This report relates only to the actual item/items tested.

#### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Product Information .....	4
1.5	Deviations from the Standard.....	4
1.6	EUT Modification Record .....	4
1.7	Test Location .....	5
<b>2</b>	<b>Test Details .....</b>	<b>6</b>
2.1	Maximum Conducted Output Power .....	6
2.2	Frequency Hopping Systems - Average Time of Occupancy .....	10
2.3	Frequency Hopping Systems - Channel Separation.....	15
2.4	Frequency Hopping Systems - 20 dB Bandwidth .....	19
2.5	Frequency Hopping Systems - Number of Hopping Channels .....	25
2.6	Authorised Band Edges .....	27
2.7	Restricted Band Edges.....	34
2.8	Spurious Radiated Emissions .....	41
<b>3</b>	<b>Measurement Uncertainty .....</b>	<b>56</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	22 November 2019

**Table 1**

## 1.2 Introduction

Applicant	Apple Inc.
Manufacturer	Apple Inc.
Model Number(s)	A2304
Serial Number(s)	C02Z1001N5VL and C02Z1006N5VL
Hardware Version(s)	REV 1.0
Software Version(s)	19A556 & 9A507
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2018 ISED RSS-247: Issue 2 (2017-02) ISED RSS-GEN: Issue 5 A1 (2019-03)
Order Number	0540176069
Date	25-February-2019
Date of Receipt of EUT	21-October-2019
Start of Test	21-October-2019
Finish of Test	25-October-2019
Name of Engineer(s)	Mehadi Choudhury, George Porter, Cristina Onaca, Malik Mohammad, Jay Balendrarajah, Ahmad Javid and Faisal Malyar
Related Document(s)	ANSI C63.10 (2013)



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISEDC RSS-247 and ISEDC RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz Bluetooth - BR/EDR						
2.1	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	ANSI C63.10 (2013)
2.2	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Average Time of Occupancy	Pass	ANSI C63.10 (2013)
2.3	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Channel Separation	Pass	ANSI C63.10 (2013)
2.4	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - 20 dB Bandwidth	Pass	ANSI C63.10 (2013)
2.5	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Number of Hopping Channels	Pass	ANSI C63.10 (2013)
2.6	15.247 (d)	5.5	-	Authorised Band Edges	Pass	ANSI C63.10 (2013)
2.7	15.205	-	8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.8	15.247 (d) and 15.205	5.5	6.13	Spurious Radiated Emissions	Pass	ANSI C63.10 (2013)

**Table 2**



## 1.4 Product Information

### 1.4.1 Technical Description

The Equipment Under Test (EUT) was a rack mounted computer, with Bluetooth, Bluetooth Low Energy and 802.11 a/b/g/n/ac capabilities in the 2.4 GHz and 5 GHz bands.

### 1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

### 1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2304: Serial Number: C02Z1001N5VL			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2304: Serial Number: C02Z1006N5VL			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 3**



## 1.7 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth - BR/EDR		
Maximum Conducted Output Power	Mehadi Choudhury	UKAS
Frequency Hopping Systems - Average Time of Occupancy	Mehadi Choudhury	UKAS
Frequency Hopping Systems - Channel Separation	Mehadi Choudhury	UKAS
Frequency Hopping Systems - 20 dB Bandwidth	Mehadi Choudhury	UKAS
Frequency Hopping Systems - Number of Hopping Channels	Mehadi Choudhury	UKAS
Authorised Band Edges	George Porter and Cristian Onaca	UKAS
Restricted Band Edges	George Porter and Cristian Onaca	UKAS
Spurious Radiated Emissions	Malik Mohammad, Cristian Onaca, Jay Balendrarajah, Ahmad Javid and Faisal Malyar	UKAS

**Table 4**

Office Address:

Octagon House  
Concorde Way  
Segensworth North  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom



## 2 Test Details

### 2.1 Maximum Conducted Output Power

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)  
ISED RSS-247, Clause 5.5  
ISED RSS-GEN, Clause 6.12

#### 2.1.2 Equipment Under Test and Modification State

A2304, S/N: C02Z1001N5VL - Modification State 0

#### 2.1.3 Date of Test

22-October-2019

#### 2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.5.

#### 2.1.5 Environmental Conditions

Ambient Temperature 24.2 °C  
Relative Humidity 44.9 %

#### 2.1.6 Test Results

##### 2.4 GHz Bluetooth - BR/EDR

Testing was performed on the modulation/packet type with the highest conducted output power. This modulation/packet type was GFSK/DH5.

Frequency (MHz)	Maximum Output Power	
	dBm	mW
2402	13.48	22.28
2440	13.25	21.13
2480	13.49	22.34

**Table 5 - Maximum Conducted Output Power Results**

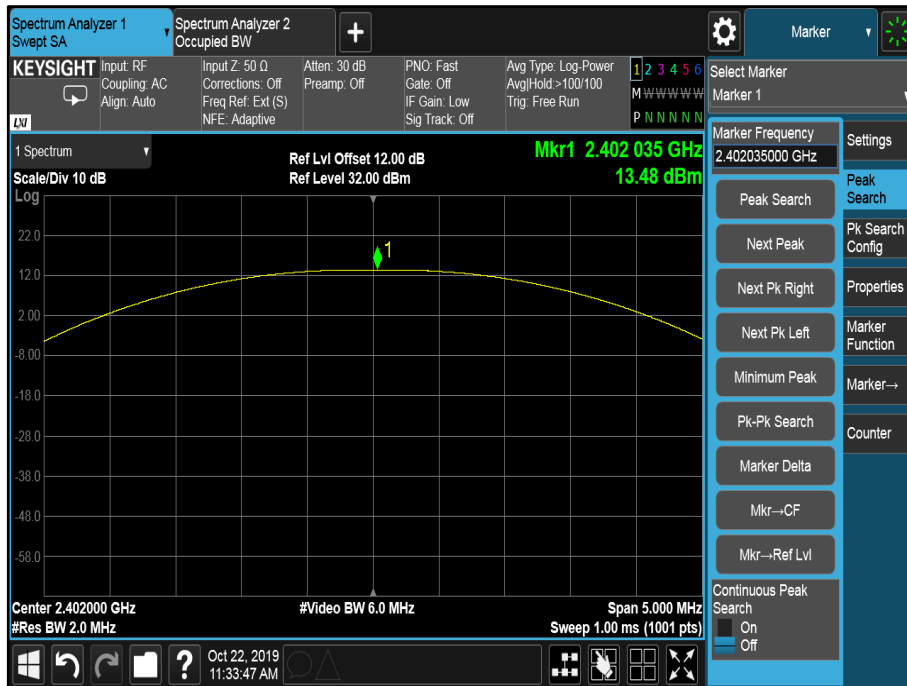


Figure 1 - 2402 MHz - Maximum Output Power


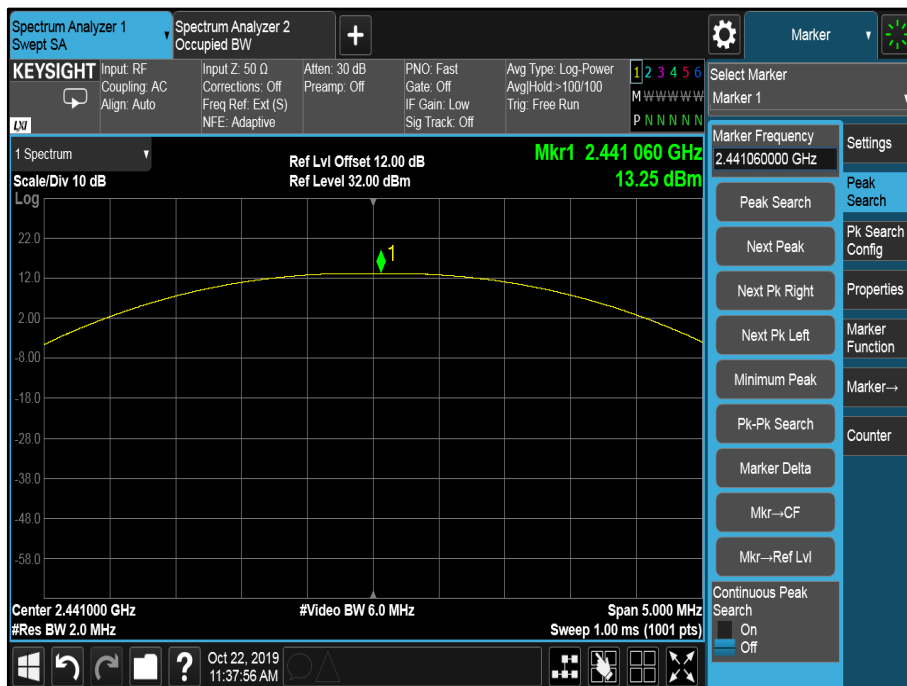


Figure 2 - 2441 MHz - Maximum Output Power



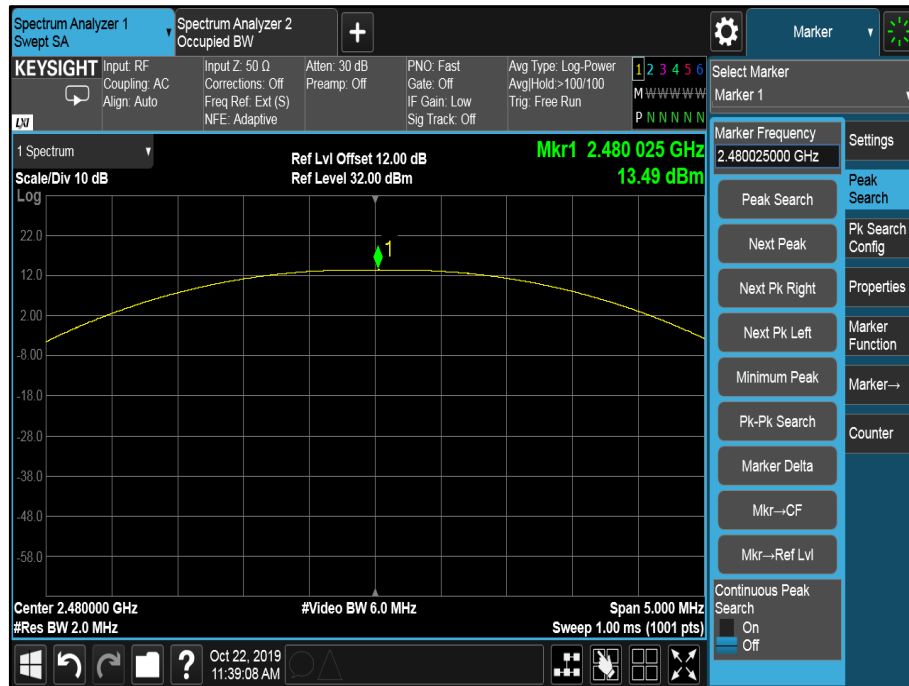

**Figure 3 - 2480 MHz - Maximum Output Power**

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Industry Canada RSS-247, Limit Clause 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channel; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channel. The e.i.r.p. shall not exceed 4 W except as provided in section 5.4(e) of the specification.



**2.1.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Multimeter	Fluke	75 Mk3	455	12	11-Oct-2020
Attenuator (20 dB, 2 W)	Pasternack	PE7004-20	489	12	24-Oct-2019
Hygrometer	Rotronic	I-1000	3220	12	25-Sep-2020
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2020
EXA	Keysight Technologies	N9010B	4969	24	21-Dec-2019
Network Analyser	Keysight Technologies	E5063A	5018	12	20-May-2020
Cable (40 GHz)	Rosenberger	LU1-001-2000	5024	-	O/P Mon
Electronic Calibration Module	Keysight Technologies	85093C	5188	12	21-May-2020
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon

**Table 6**

O/P Mon – Output Monitored using calibrated equipment



## 2.2 Frequency Hopping Systems - Average Time of Occupancy

### 2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)  
ISED RSS-247, Clause 5.1

### 2.2.2 Equipment Under Test and Modification State

A2304, S/N: C02Z1001N5VL - Modification State 0

### 2.2.3 Date of Test

23-October-2019

### 2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.4.

### 2.2.5 Environmental Conditions

Ambient Temperature 25.0 °C  
Relative Humidity 35.5 %

### 2.2.6 Test Results

#### 2.4 GHz Bluetooth - BR/EDR

Packet Type	Dwell Time (ms)	Number of Transmissions	Average Occupancy Time (ms)
DH1	0.381	314	119.634
DH3	1.640	169	277.160
DH5	2.885	94	271.190

**Table 7**

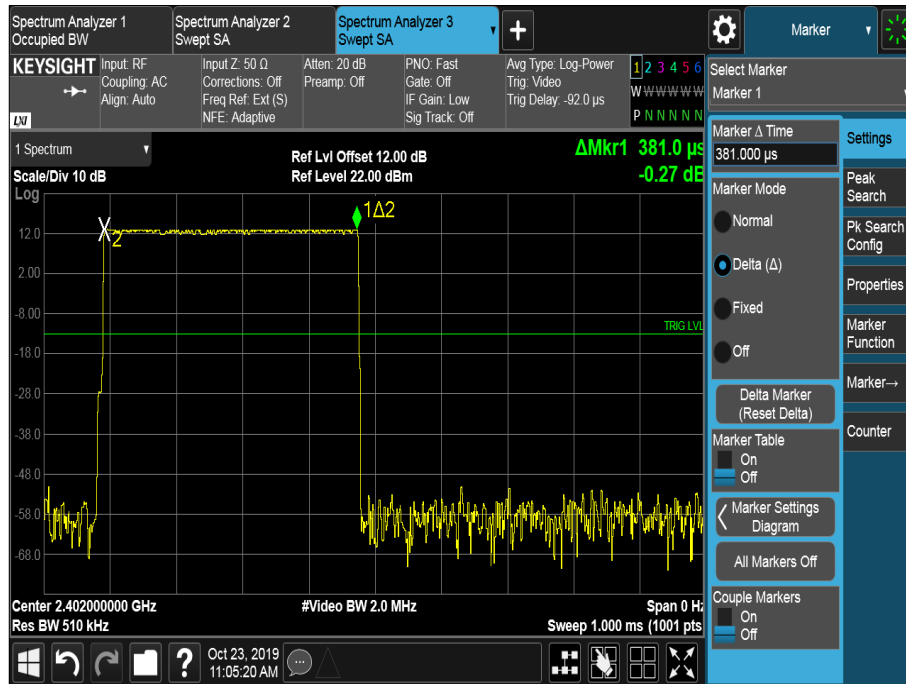


Figure 4 - DH1, Dwell Time

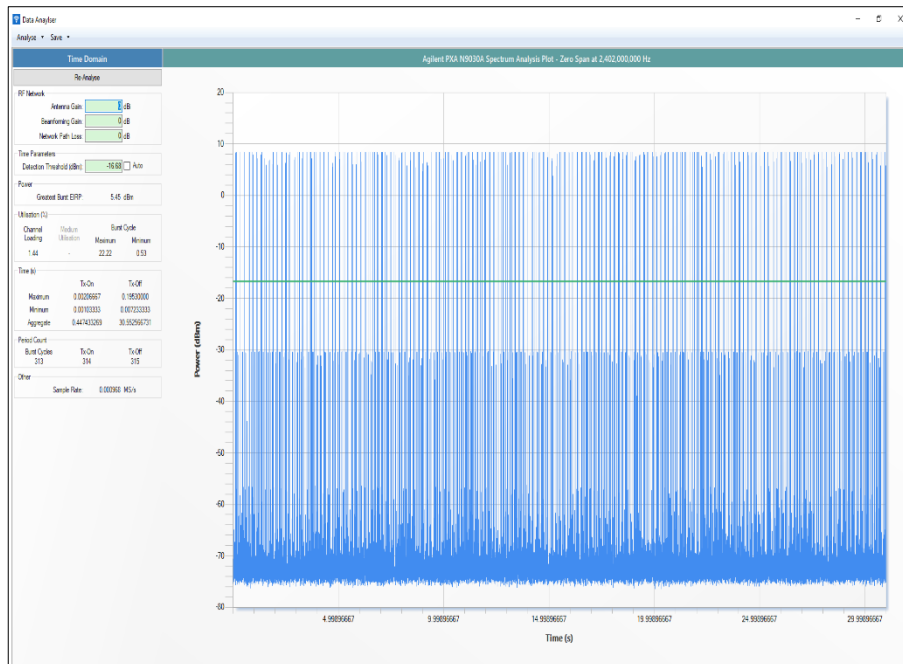


Figure 5 - DH1, Total Average Time of Occupancy

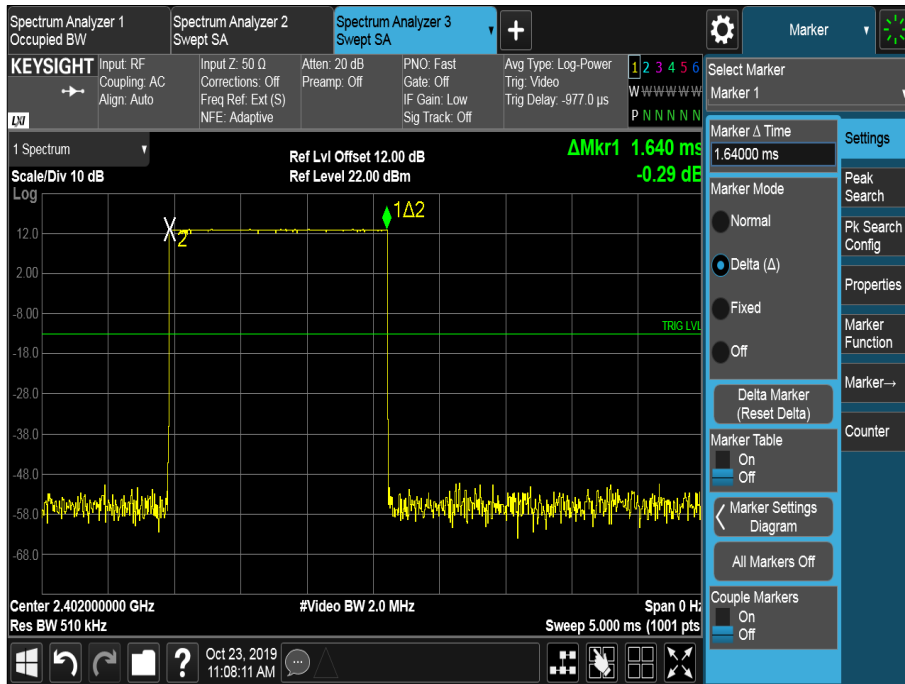


Figure 6 - DH3, Dwell Time

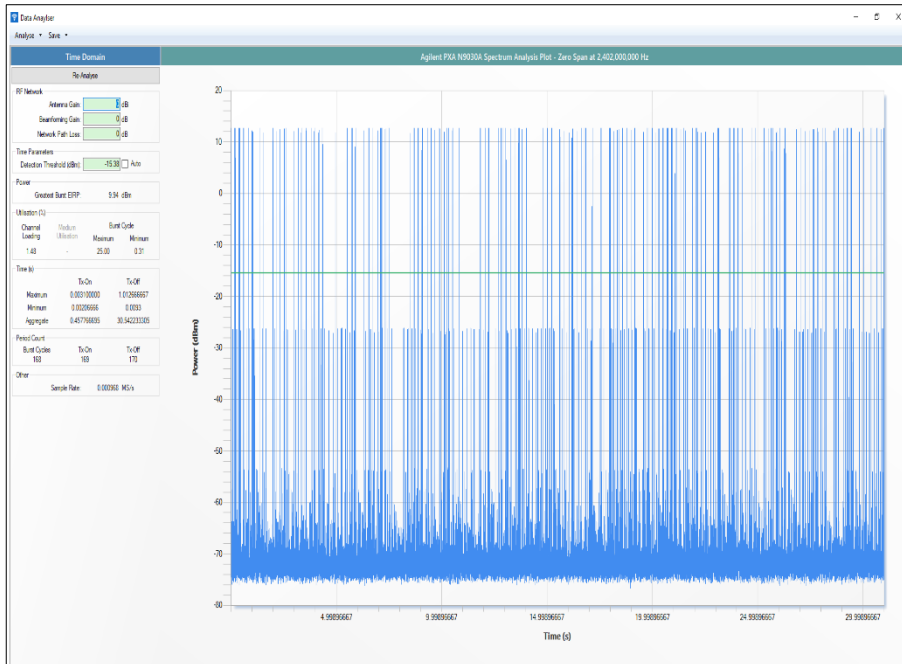


Figure 7 - DH3, Total Average Time of Occupancy

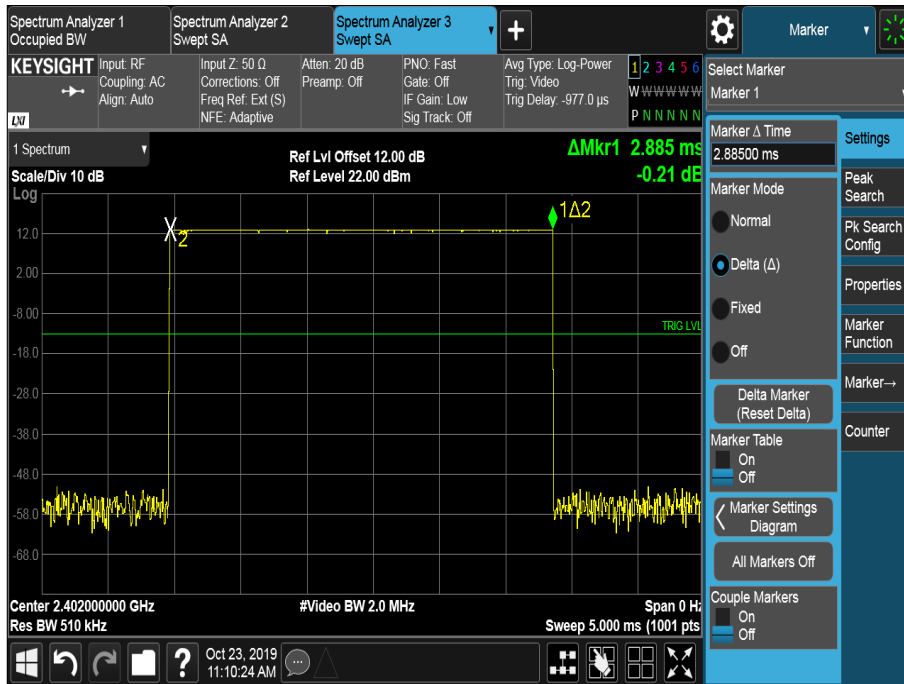


Figure 8 - DH5, Dwell Time

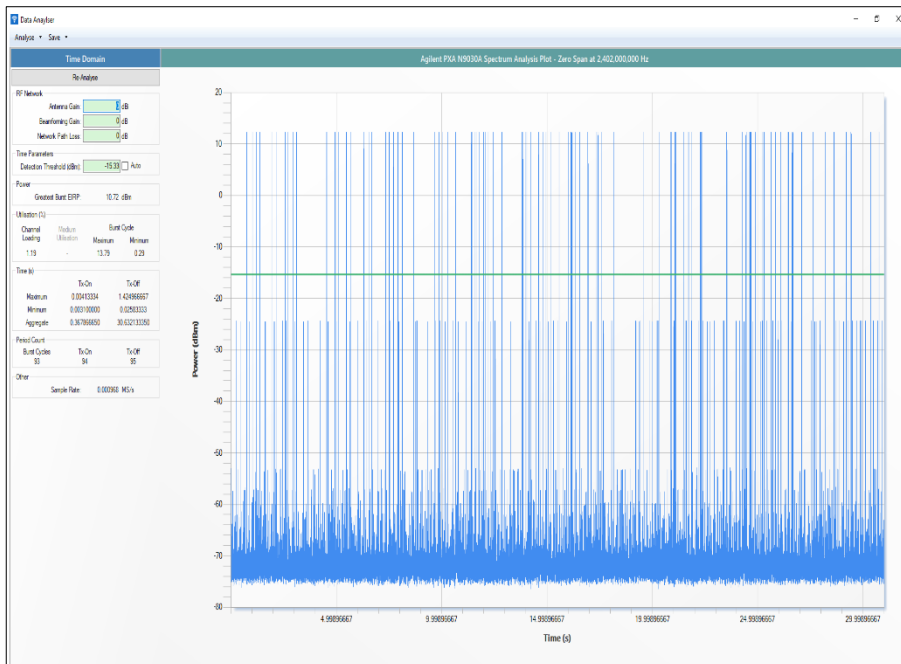


Figure 9 - DH5, Total Average Time of Occupancy



FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Industry Canada RSS-247, Limit Clause 5.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

**2.2.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Multimeter	Fluke	75 Mk3	455	12	11-Oct-2020
Attenuator (20 dB, 2 W)	Pasternack	PE7004-20	489	12	24-Oct-2019
Hygrometer	Rotronic	I-1000	3220	12	25-Sep-2020
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2020
EXA	Keysight Technologies	N9010B	4969	24	21-Dec-2019
Network Analyser	Keysight Technologies	E5063A	5018	12	20-May-2020
Cable (40 GHz)	Rosenberger	LU1-001-2000	5024	-	O/P Mon
Electronic Calibration Module	Keysight Technologies	85093C	5188	12	21-May-2020
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon

**Table 8**

O/P Mon – Output Monitored using calibrated equipment.



**2.3 Frequency Hopping Systems - Channel Separation**

**2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)  
ISED RSS-247, Clause 5.1

**2.3.2 Equipment Under Test and Modification State**

A2304, S/N: C02Z1001N5VL - Modification State 0

**2.3.3 Date of Test**

23-October-2019

**2.3.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 7.8.2.

This test was performed with frequency hopping disabled as some modulation schemes overlap adjacent channels. Instead trace one was used to determine the peak of the lower channel and trace two to determine the peak of its upper adjacent channel.

**2.3.5 Environmental Conditions**

Ambient Temperature 25.0 °C  
Relative Humidity 35.5 %

**2.3.6 Test Results**

2.4 GHz Bluetooth - BR/EDR

Modulation	Channel Separation (MHz)
GFSK	1.08
$\pi/4$ DQPSK	1.00
8-DPSK	1.00

**Table 9**





Figure 10 - GFSK



Figure 11 -  $\pi/4$  DQPSK

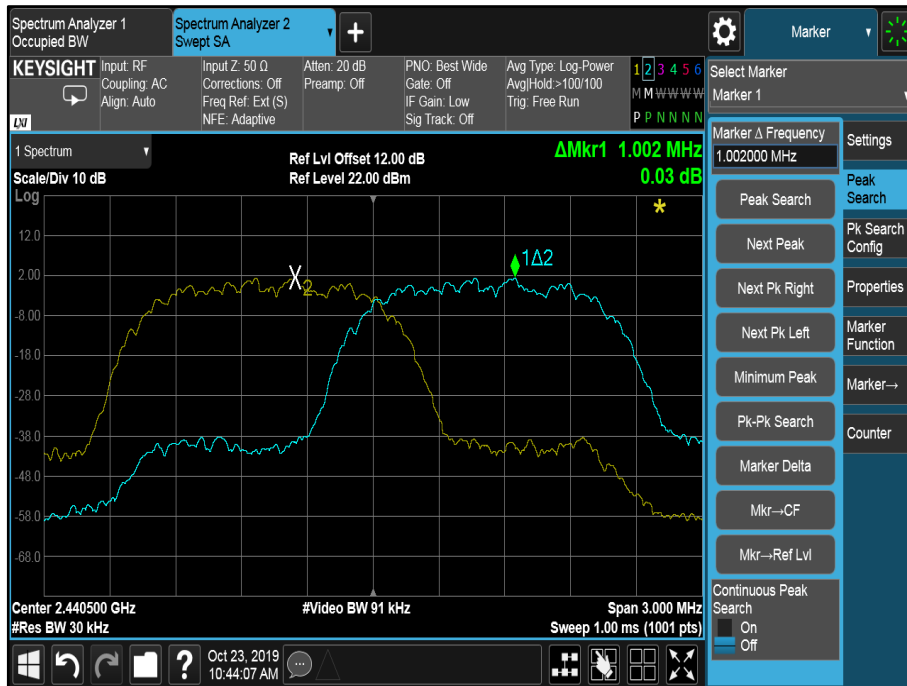


Figure 12 - 8-DPSK



FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

Industry Canada RSS-247, Limit Clause 5.1 (b)

FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

**2.3.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Multimeter	Fluke	75 Mk3	455	12	11-Oct-2020
Attenuator (20 dB, 2 W)	Pasternack	PE7004-20	489	12	24-Oct-2019
Hygrometer	Rotronic	I-1000	3220	12	25-Sep-2020
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2020
EXA	Keysight Technologies	N9010B	4969	24	21-Dec-2019
Network Analyser	Keysight Technologies	E5063A	5018	12	20-May-2020
Cable (40 GHz)	Rosenberger	LU1-001-2000	5024	-	O/P Mon
Electronic Calibration Module	Keysight Technologies	85093C	5188	12	21-May-2020
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon

**Table 10**

O/P Mon – Output Monitored using calibrated equipment.



**2.4 Frequency Hopping Systems - 20 dB Bandwidth**

**2.4.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)  
ISED RSS-247, Clause 5.1

**2.4.2 Equipment Under Test and Modification State**

A2304, S/N: C02Z1001N5VL - Modification State 0

**2.4.3 Date of Test**

23-October-2019

**2.4.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 6.9.2.

**2.4.5 Environmental Conditions**

Ambient Temperature 25.0 °C  
Relative Humidity 35.5 %

**2.4.6 Test Results**

2.4 GHz Bluetooth - BR/EDR

Frequency (MHz)	20 dB Bandwidth (kHz)		
	GFSK	$\pi/4$ DQPSK	8-DPSK
2402	960.6	1376	1359
2440	957.3	1372	1352
2480	969.1	1373	1367

**Table 11**

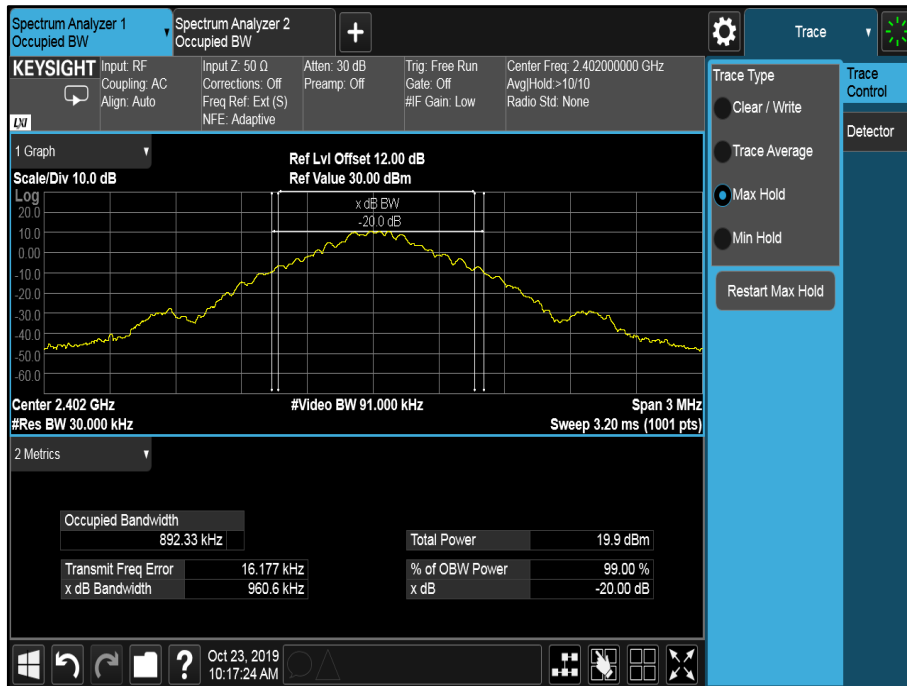


Figure 13 - 2402 MHz - GFSK

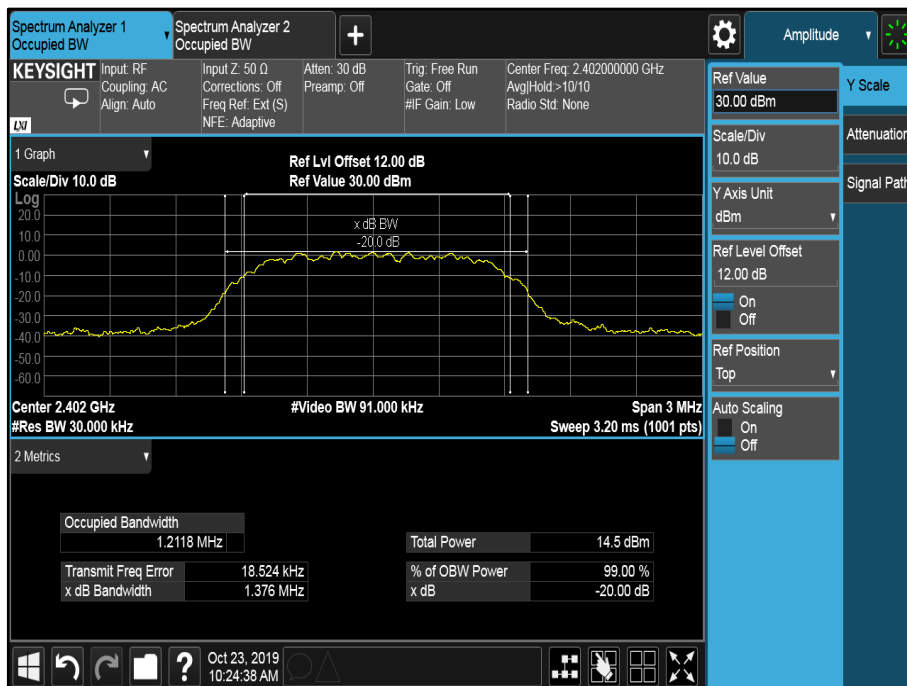


Figure 14 - 2402 MHz -  $\pi/4$  DQPSK

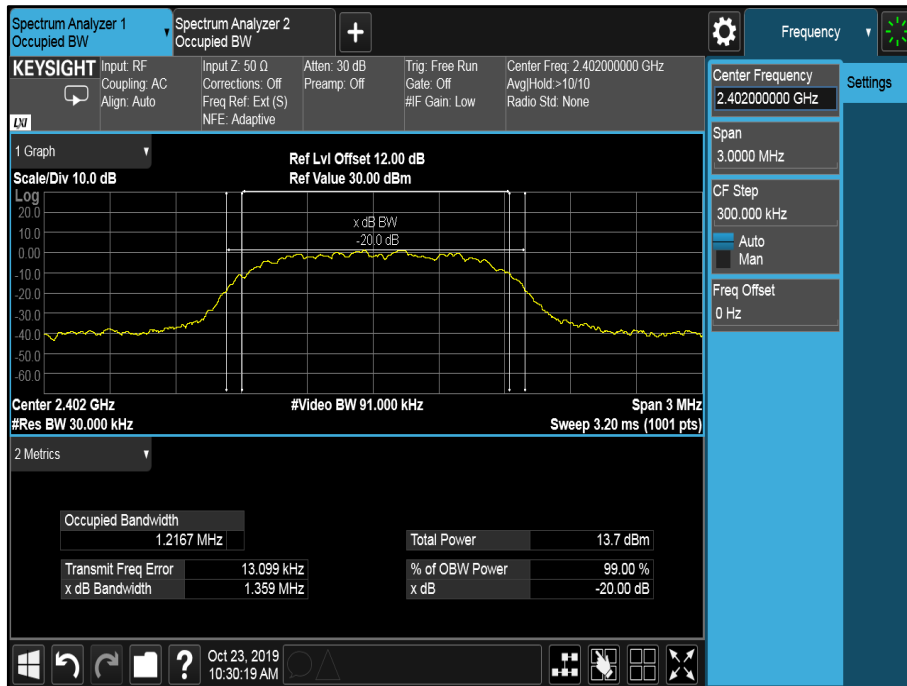


Figure 15 - 2402 MHz - 8-DPSK



Figure 16 - 2440 MHz - GFSK



Figure 17 - 2440 MHz -  $\pi/4$  DQPSK

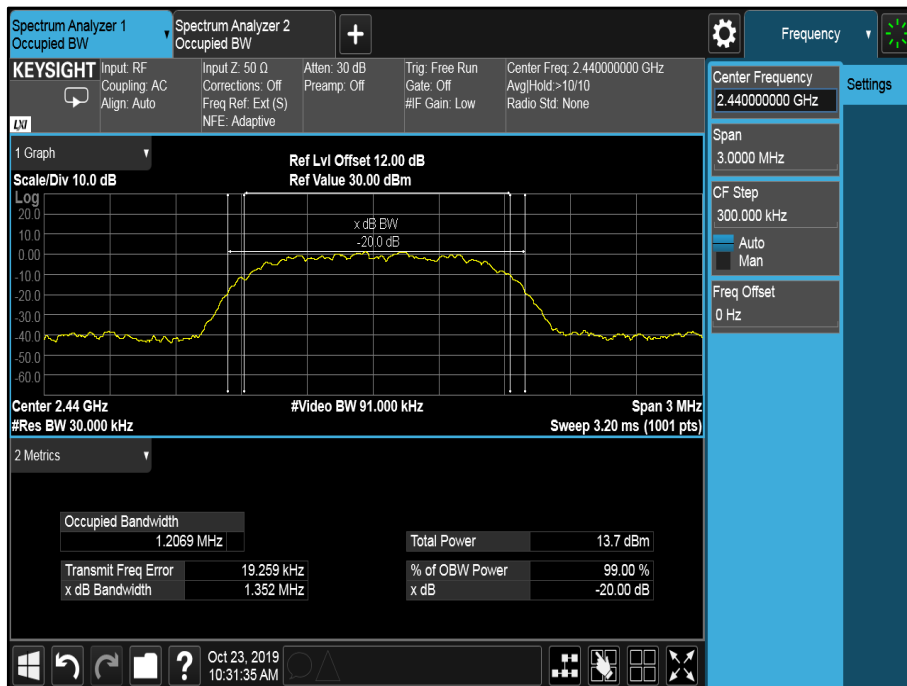


Figure 18 - 2440 MHz - 8-DPSK

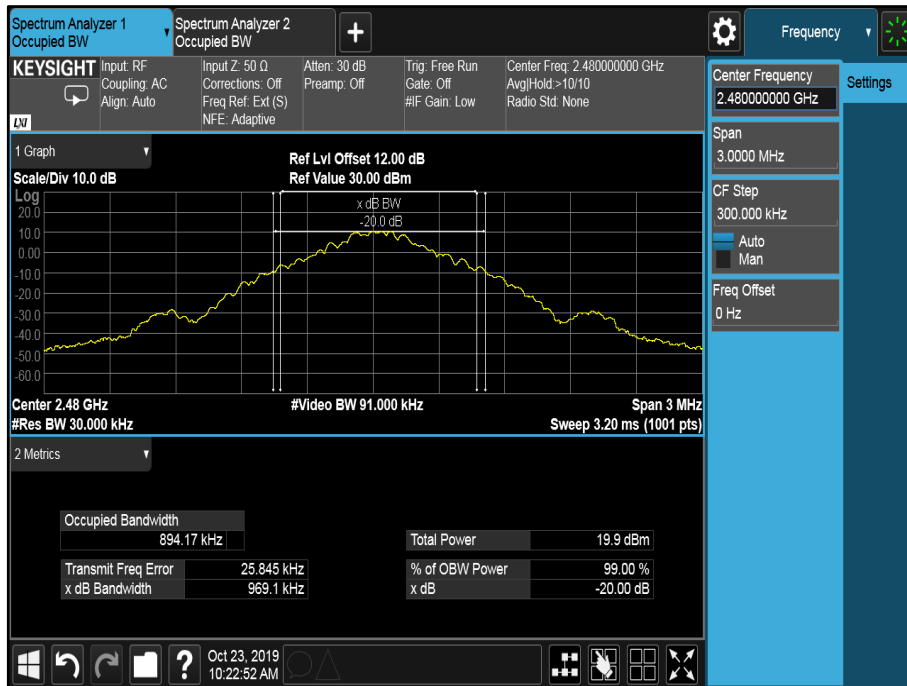


Figure 19 - 2480 MHz – GFSK

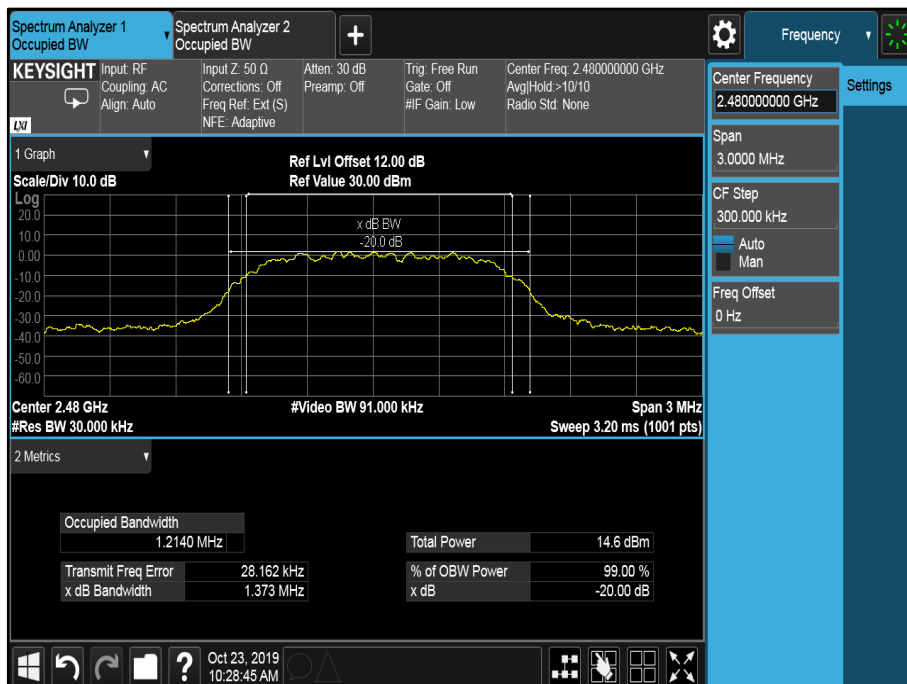


Figure 20 - 2480 MHz -  $\pi/4$  DQPSK



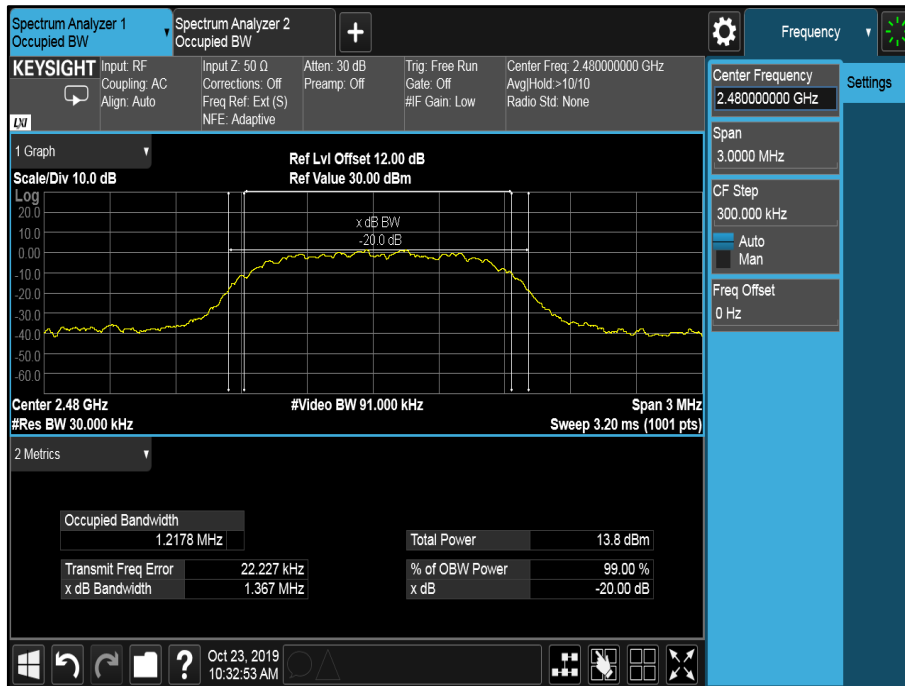


Figure 21 - 2480 MHz - 8-DPSK

FCC 47 CFR Part 15 and RSS-247 Limit Clause

None specified.

**2.4.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Multimeter	Fluke	75 Mk3	455	12	11-Oct-2020
Attenuator (20 dB, 2 W)	Pasternack	PE7004-20	489	12	24-Oct-2019
Hygrometer	Rotronic	I-1000	3220	12	25-Sep-2020
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2020
EXA	Keysight Technologies	N9010B	4969	24	21-Dec-2019
Network Analyser	Keysight Technologies	E5063A	5018	12	20-May-2020
Cable (40 GHz)	Rosenberger	LU1-001-2000	5024	-	O/P Mon
Electronic Calibration Module	Keysight Technologies	85093C	5188	12	21-May-2020
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon

Table 12

O/P Mon – Output Monitored using calibrated equipment.



## 2.5 Frequency Hopping Systems - Number of Hopping Channels

### 2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)  
ISED RSS-247, Clause 5.1

### 2.5.2 Equipment Under Test and Modification State

A2304, S/N: C02Z1001N5VL - Modification State 0

### 2.5.3 Date of Test

23-October-2019

### 2.5.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.3.

### 2.5.5 Environmental Conditions

Ambient Temperature 25.0 °C  
Relative Humidity 35.5 %

### 2.5.6 Test Results

#### 2.4 GHz Bluetooth - BR/EDR

Number of Hopping Channels: 79

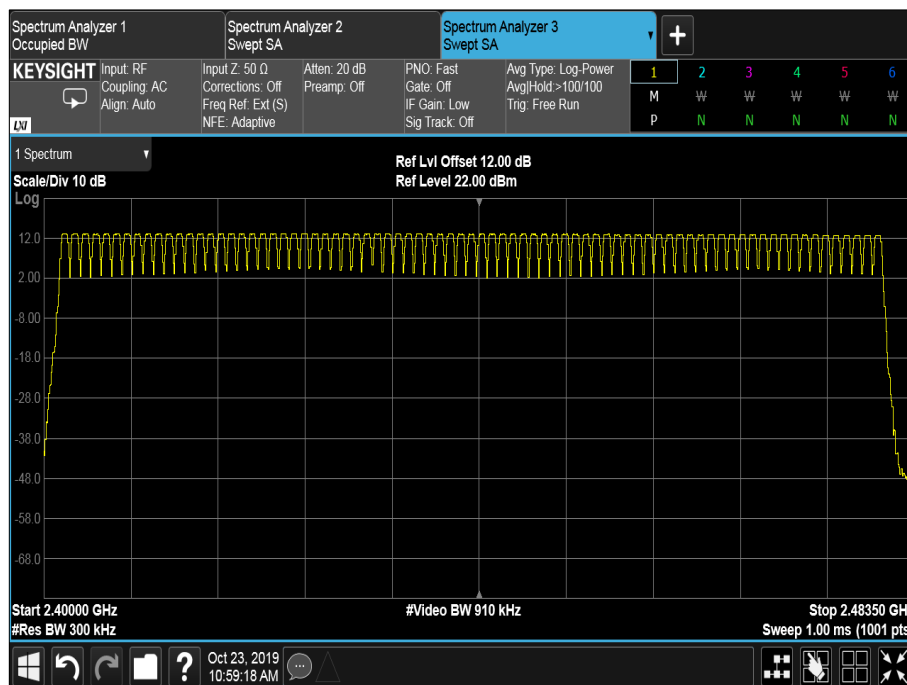


Figure 22 - Measurement Frequency Range: 2400 MHz to 2483.5 MHz



FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

≥ 15 channels

Industry Canada RSS-247, Limit Clause 5.1 (d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

**2.5.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Multimeter	Fluke	75 Mk3	455	12	11-Oct-2020
Attenuator (20 dB, 2 W)	Pasternack	PE7004-20	489	12	24-Oct-2019
Hygrometer	Rotronic	I-1000	3220	12	25-Sep-2020
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2020
EXA	Keysight Technologies	N9010B	4969	24	21-Dec-2019
Network Analyser	Keysight Technologies	E5063A	5018	12	20-May-2020
Cable (40 GHz)	Rosenberger	LU1-001-2000	5024	-	O/P Mon
Electronic Calibration Module	Keysight Technologies	85093C	5188	12	21-May-2020
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon

**Table 13**

O/P Mon – Output Monitored using calibrated equipment



## 2.6 Authorised Band Edges

### 2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d),  
ISED RSS-247, Clause 5.5

### 2.6.2 Equipment Under Test and Modification State

A2304, S/N: C02Z1006N5VL - Modification State 0

### 2.6.3 Date of Test

12-August-2019 to 06-November-2019

### 2.6.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

Authorised band edge measurements were performed with the device operating in SISO and MIMO configurations across the various modes supported by the device.

### 2.6.5 Environmental Conditions

Ambient Temperature 15.8 - 27.0 °C  
Relative Humidity 35.0 - 40.3 %

### 2.6.6 Test Results

#### 2.4 GHz Bluetooth - BR/EDR

Mode	Modulation	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	GFSK	DH5	2402	2400.0	-61.17
Static	$\pi/4$ DQPSK	2DH5	2402	2400.0	-56.25
Static	8-DPSK	3DH5	2402	2400.0	-58.55
Hopping	GFSK	DH5	2402	2400.0	-68.81
Hopping	$\pi/4$ DQPSK	2DH5	2402	2400.0	-63.99
Hopping	8-DPSK	3DH5	2402	2400.0	-62.52

**Table 14 - Authorised Band Edge Results**

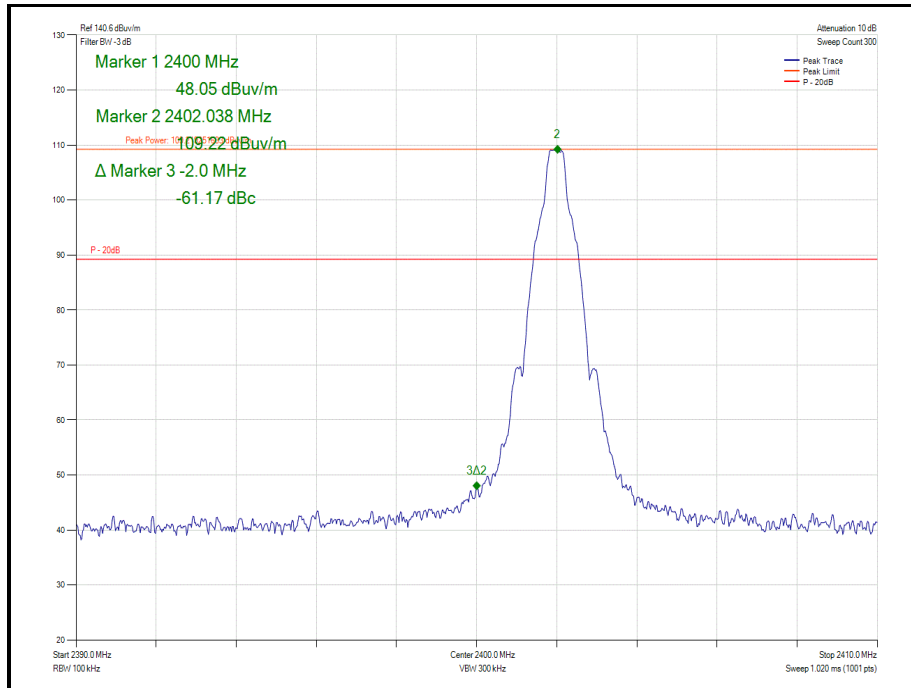


Figure 23 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

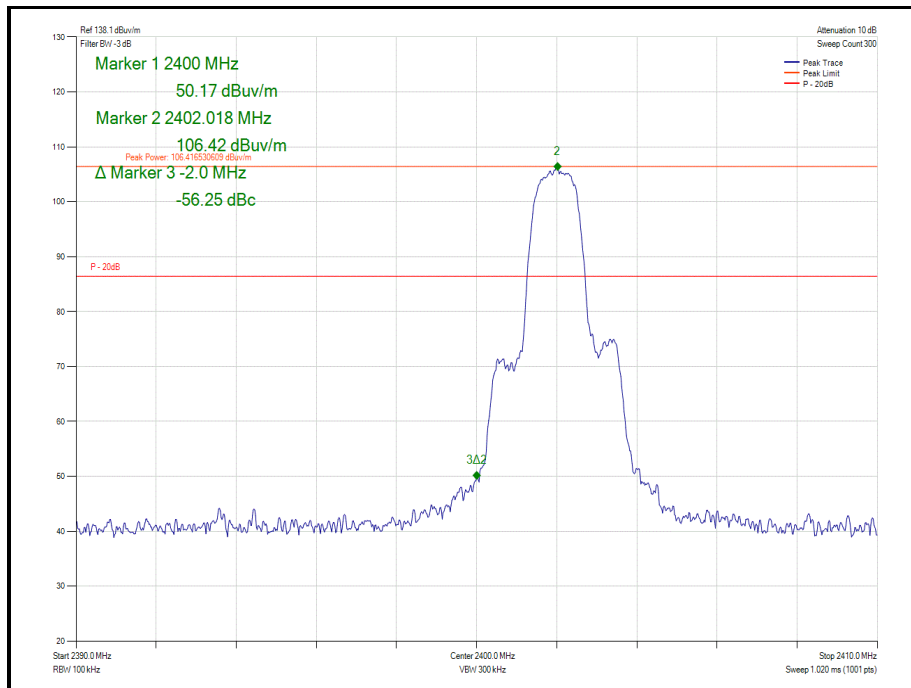


Figure 24 - Static -  $\pi/4$  DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

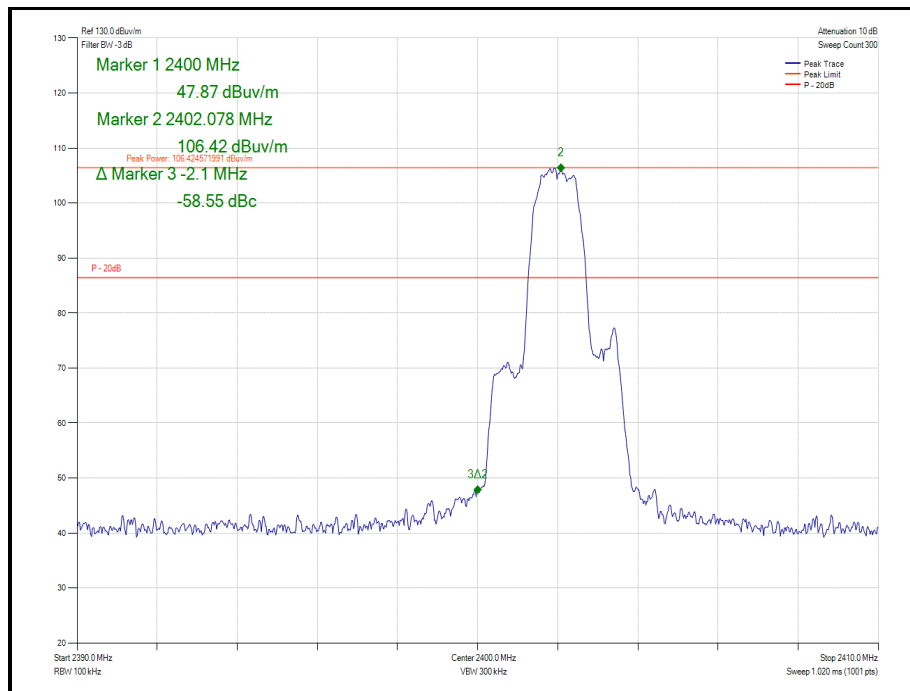


Figure 25 - Static - 8-DPSK/3DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

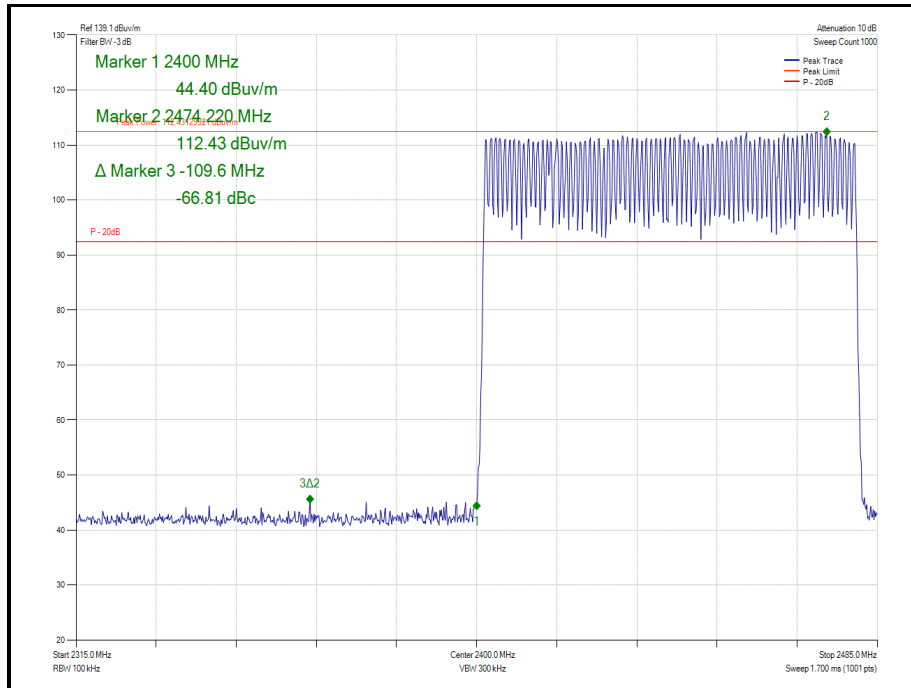


Figure 26 - Hopping - GFSK/DH5 - Band Edge Frequency 2400.0 MHz


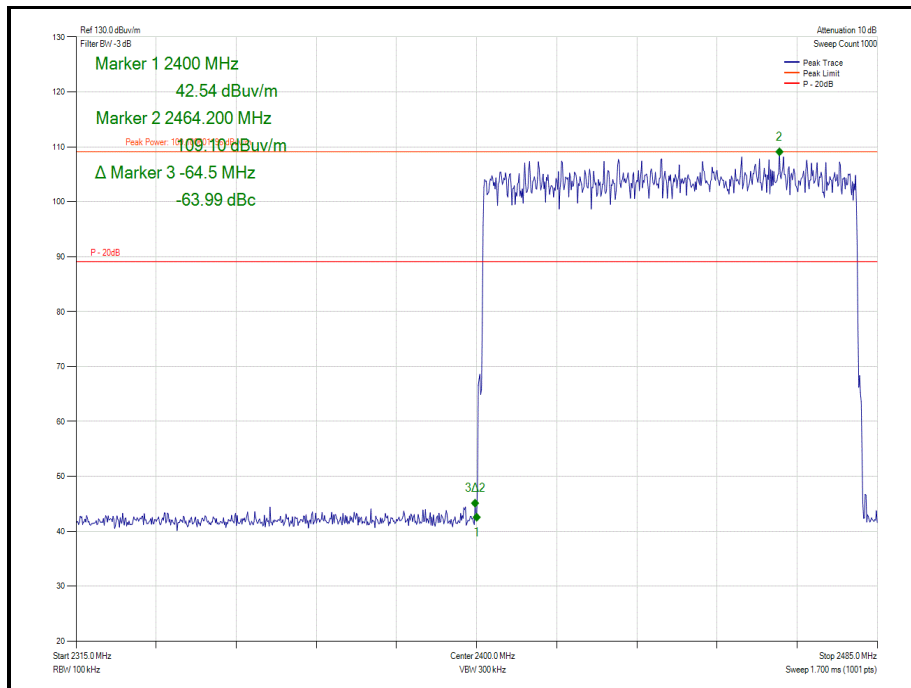


Figure 27 - Hopping -  $\pi/4$  DQPSK/2DH5 - Band Edge Frequency 2400.0 MHz

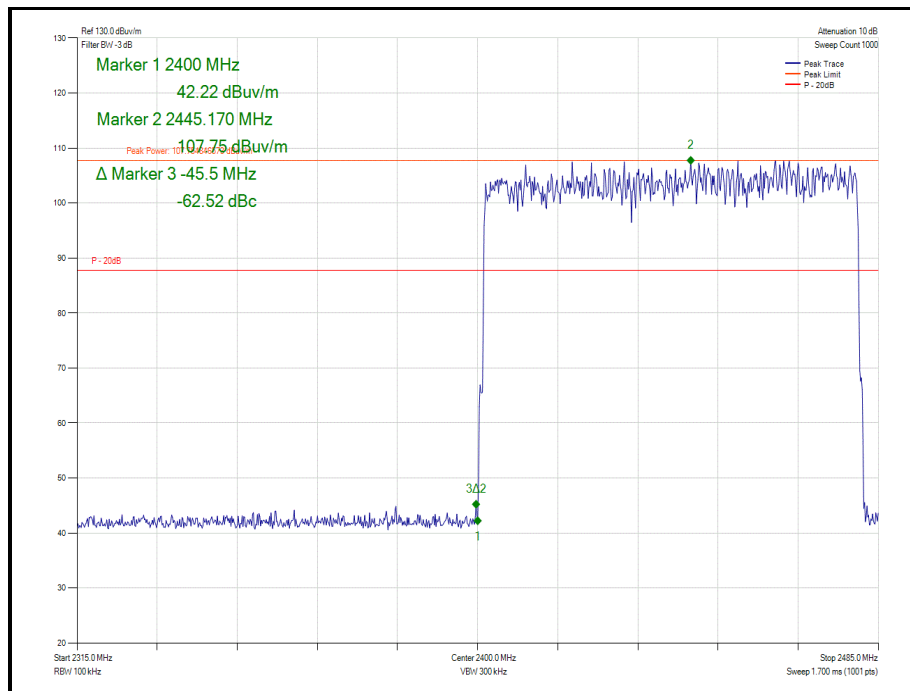

**Figure 28 - Hopping - 8-DPSK/3DH5 - Band Edge Frequency 2400.0 MHz**

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

Industry Canada RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.





### 2.6.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5 and RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
10dB/1W SMA Attenuator dc - 18GHz	Seaelectro	60-674-1010-89	395	-	O/P Mon
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Hygrometer	Rotronic	HYGROPALM 1	2338	12	15-Nov-2019
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	17-Dec-2019
Cable (Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4526	6	11-Dec-2019
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	11-Mar-2020
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	11-Nov-2019
8m N-Type RF Cable	Teledyne	PR90-088-8MTR	5095	12	04-Dec-2019
Cable (18 GHz)	Rosenberger	LU7-071-1000	5103	12	06-Oct-2020
Cable (18 GHz)	Rosenberger	LU7-071-1000	5104	12	05-Dec-2019
Cable (18 GHz)	Rosenberger	LU7-071-2000	5107	12	06-Oct-2020
EmX Emissions Software	TUV SUD	EmX	5125	-	Software
1.5m 40GHz RF Cable	Scott Cables	KPS-1501-2000-KPS	5127	6	11-Dec-2019
Screened Room (11)	Rainford	Rainford	5136	36	01-Nov-2021
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU

**Table 15**

TU – Traceability Unscheduled  
 O/P Mon – Output Monitored using Calibrated Equipment



Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Turntable	Maturo	TT 15WF	5160	-	TU
8 Meter Cable	Teledyne	PR90-088-8MTR	5212	12	30-Aug-2020
Horn Antenna (1-10GHz)	Schwarzbeck	BBHA 9120 B	5215	12	11-Mar-2020

**Table 16**

TU – Traceability Unscheduled



**2.7 Restricted Band Edges**

**2.7.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.205  
 ISEDC RSS-GEN, Clause 8.10

**2.7.2 Equipment Under Test and Modification State**

A2304, S/N: C02Z1006N5VL - Modification State 0

**2.7.3 Date of Test**

12-August-2019 to 06-November-2019

**2.7.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5. These are shown for information purposes and were used to determine the worst case measurement point. Final average measurements were then taken in accordance with ANSI C63.10 clause 4.1.4.2.2. to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dBµV/m to µV/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

**2.7.5 Environmental Conditions**

Ambient Temperature 15.8 - 27.0 °C  
 Relative Humidity 35.0 - 40.3 %

**2.7.6 Test Results**

2.4 GHz Bluetooth - BR/EDR

Mode	Modulation	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
Static	GFSK	DH5	2402	2390.0	54.04	41.51
Static	π/4 DQPSK	2DH5	2402	2390.0	54.12	41.31
Static	8-DPSK	3DH5	2402	2390.0	53.63	41.02
Static	GFSK	DH5	2480	2483.5	53.19	42.99
Static	π/4 DQPSK	2DH5	2480	2483.5	53.32	43.54
Static	8-DPSK	3DH5	2480	2483.5	54.26	44.06

**Table 17 - Restricted Band Edge Results**

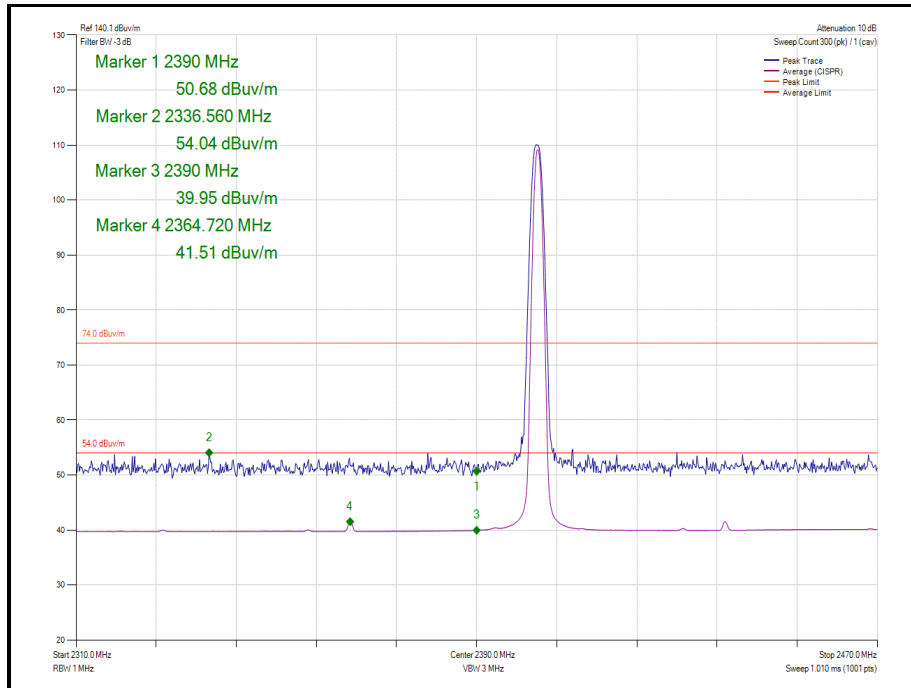


Figure 29 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

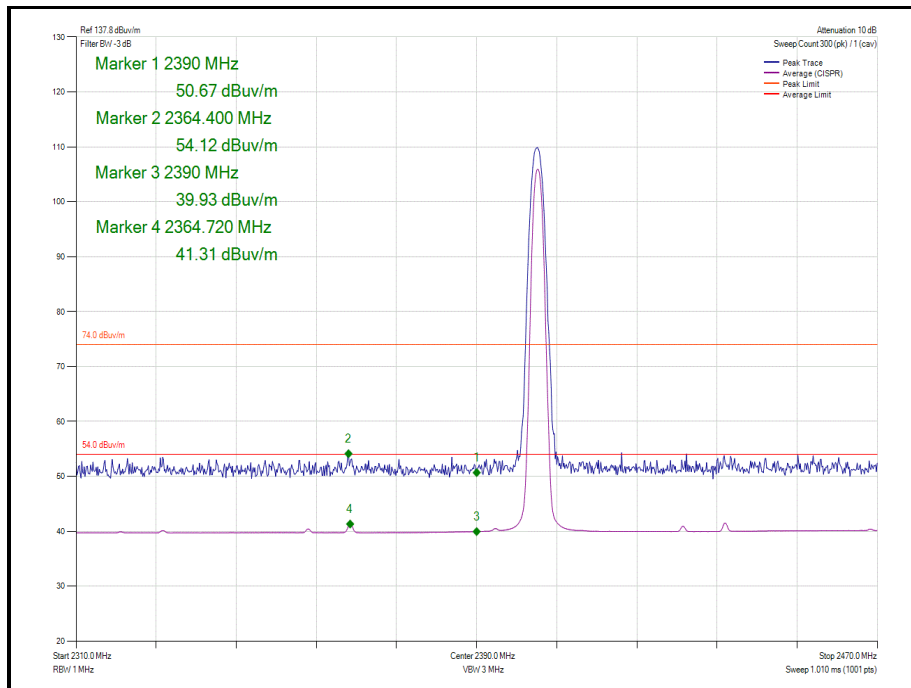


Figure 30 - Static -  $\pi/4$  DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

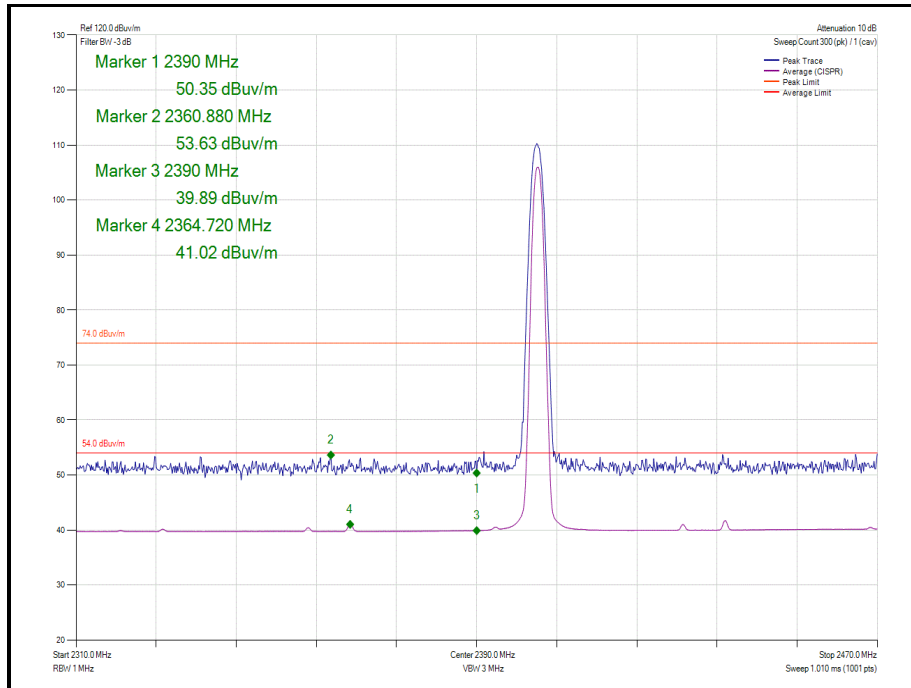


Figure 31 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

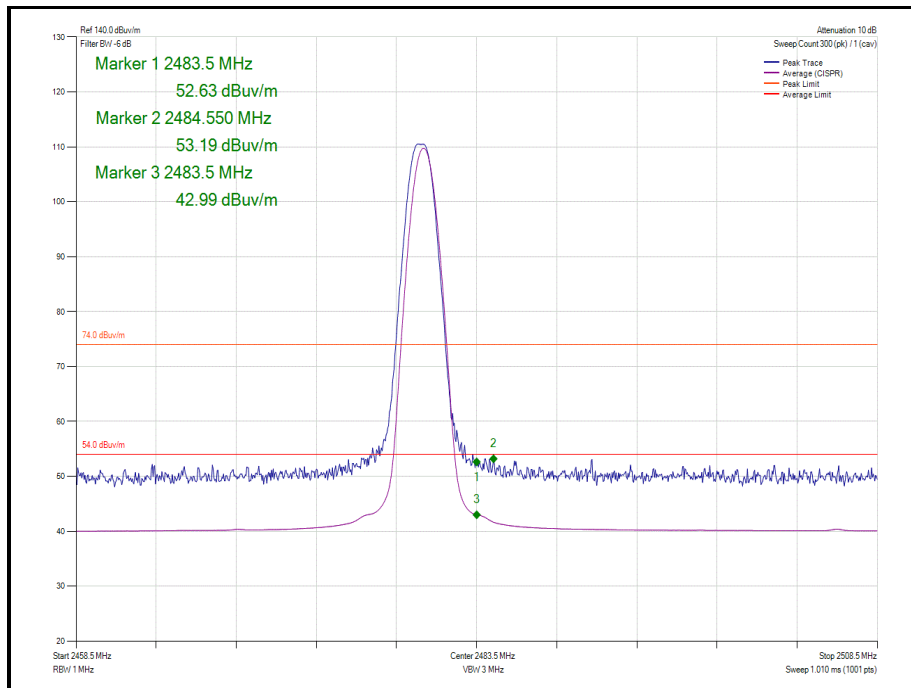


Figure 32 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

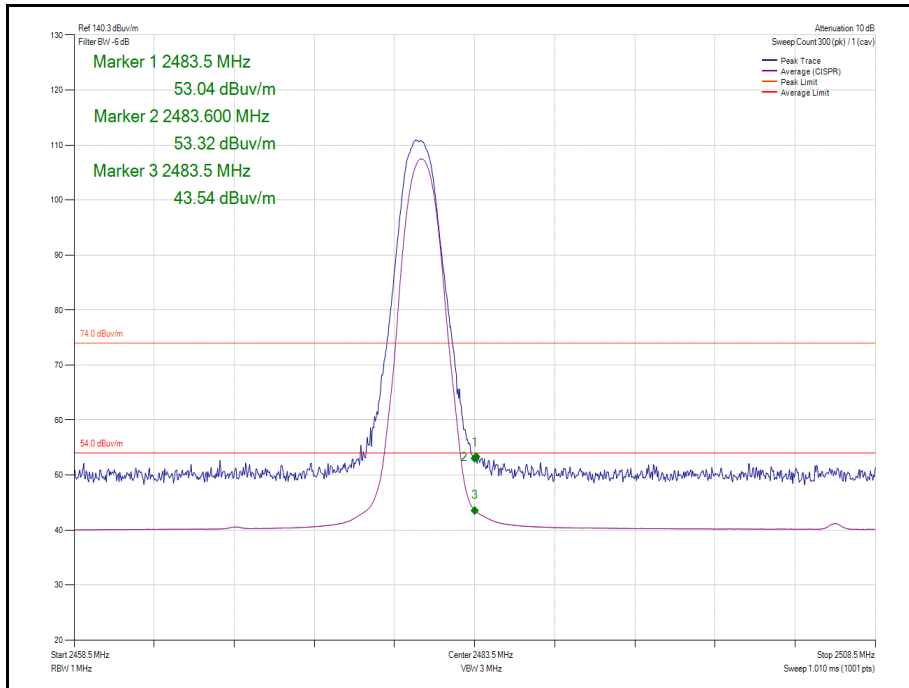


Figure 33 - Static -  $\pi/4$  DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

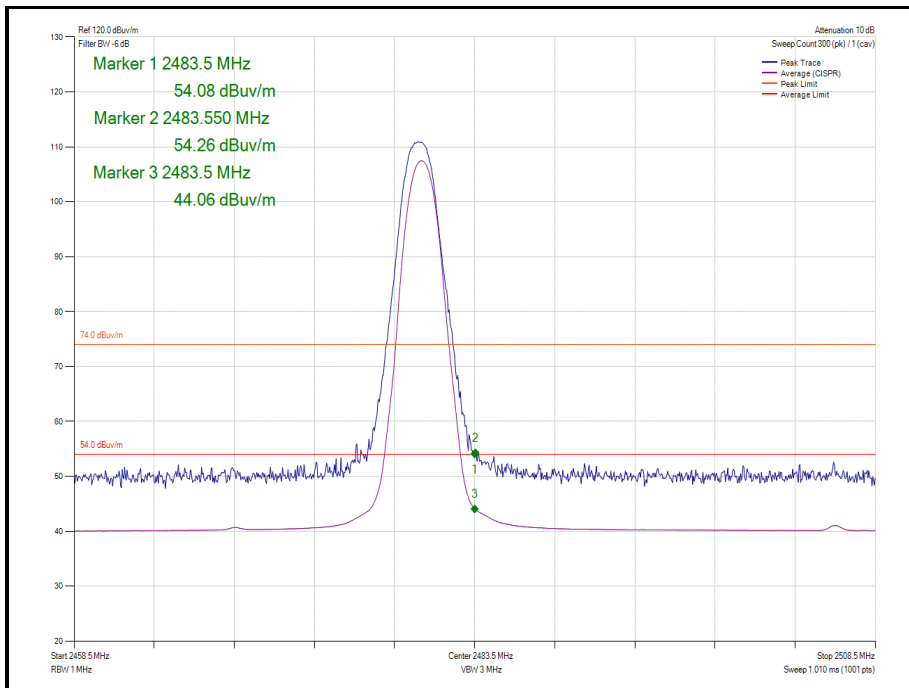


Figure 34 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

**Table 18**

Industry Canada RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

**Table 19**

\*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



### 2.7.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5 and RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
10dB/1W SMA Attenuator dc - 18GHz	Seaelectro	60-674-1010-89	395	-	O/P Mon
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Hygrometer	Rotronic	HYGROPALM 1	2338	12	15-Nov-2019
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	17-Dec-2019
Cable (Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4526	6	11-Dec-2019
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	11-Mar-2020
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	11-Nov-2019
8m N-Type RF Cable	Teledyne	PR90-088-8MTR	5095	12	04-Dec-2019
Cable (18 GHz)	Rosenberger	LU7-071-1000	5103	12	06-Oct-2020
Cable (18 GHz)	Rosenberger	LU7-071-1000	5104	12	05-Dec-2019
Cable (18 GHz)	Rosenberger	LU7-071-2000	5107	12	06-Oct-2020
EmX Emissions Software	TUV SUD	EmX	5125	-	Software
1.5m 40GHz RF Cable	Scott Cables	KPS-1501-2000-KPS	5127	6	11-Dec-2019
Screened Room (11)	Rainford	Rainford	5136	36	01-Nov-2021
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU

**Table 20**

O/P Mon – Output Monitored using calibrated equipment  
 TU – Traceability Unscheduled





Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Turntable	Maturo	TT 15WF	5160	-	TU
8 Meter Cable	Teledyne	PR90-088-8MTR	5212	12	30-Aug-2020
Horn Antenna (1-10GHz)	Schwarzbeck	BBHA 9120 B	5215	12	11-Mar-2020

**Table 21**

TU – Traceability Unscheduled



## **2.8 Spurious Radiated Emissions**

### **2.8.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.205  
ISED RSS-247, Clause 5.5  
ISED RSS-GEN, Clause 6.13

### **2.8.2 Equipment Under Test and Modification State**

A2304, S/N: C02Z1006N5VL - Modification State 0

### **2.8.3 Date of Test**

18-October-2019 to 29-October-2019

### **2.8.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

The EUT was placed on the non-conducting platform in a manner typical of a normal installation.


Ports on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4. Multiple connectors of the same type and additional interconnecting cables were connected and pre-scans performed to determine whether the level of the emissions were increased by >2 dB.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.5 to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.2.

The plots shown are the characterization of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dB $\mu$ V/m to  $\mu$ V/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

Radiated emission measurements from 30 MHz to 1 GHz was limited to measurements on middle channel only.

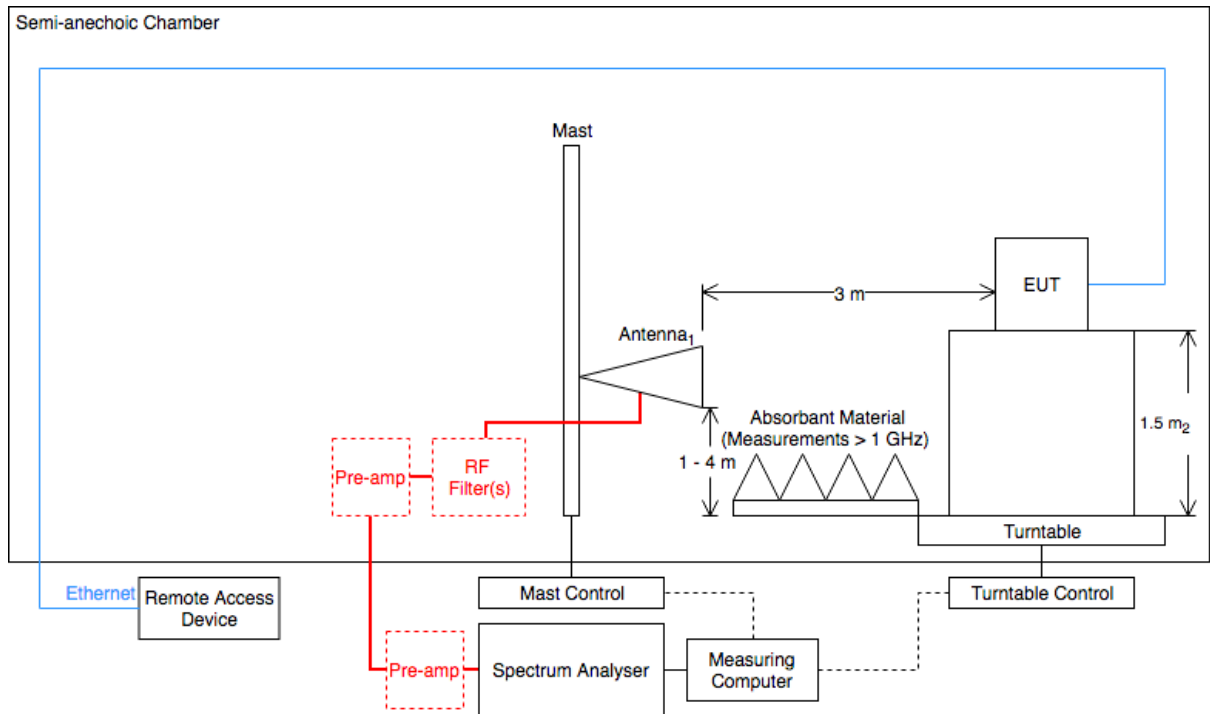

<sub>1</sub> Antenna is boresighted for measurements < 1 GHz.  
<sub>2</sub> Height from the EUT to ground is 0.8 m for measurements < 1 GHz.

**Figure 35 - Radiated Emissions Test Setup Diagram**

**2.8.5 Environmental Conditions**

Ambient Temperature 15.8 - 27.0 °C  
 Relative Humidity 35.0 - 40.3 %

**2.8.6 Test Results**

2.4 GHz Bluetooth - BR/EDR

Bluetooth - BR/EDR

Frequency (MHz)	QP Level (dBµV/m)	QP Limit (dBµV/m)	QP Margin (dB)	Angle (Deg)	Height(cm)	Polarisation
37.9	21.1	40.0	18.90	87	335	Horizontal
284.3	32.1	46.0	13.92	181	100	Vertical
284.4	33.8	46.0	12.23	283	109	Horizontal

**Table 22 – 2440 MHz, 30 MHz to 1 GHz Radiated Emissions Results**

All other emissions that were detected are within the unrestricted bands and are therefore at least 20 dB from the applicable test limit.

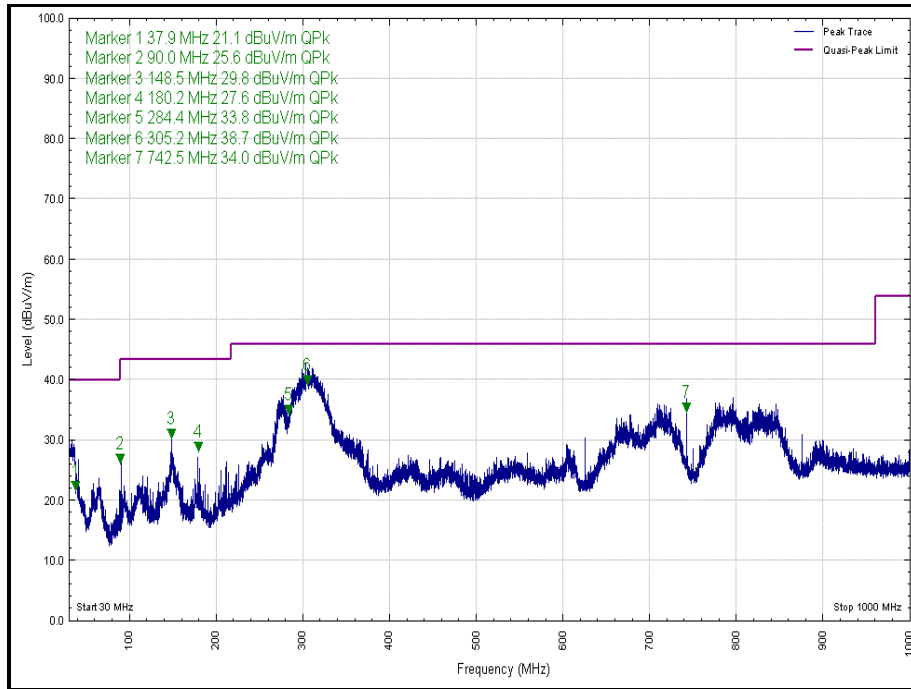


Figure 36 - 2440 MHz, 30 MHz to 1 GHz, Polarisation: Horizontal

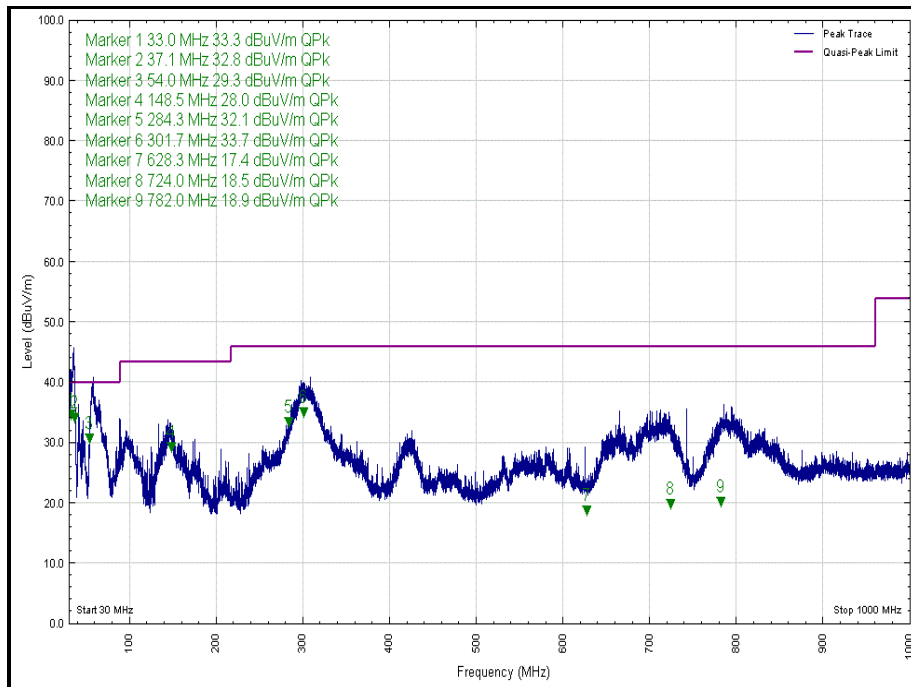



Figure 37 - 2440 MHz, 30 MHz to 1 GHz, Polarisation: Vertical



Frequency (GHz)	Result (dBµV/m)		Limit (dBµV/m)		Margin (dB)	
	Peak	Average	Peak	Average	Peak	Average
2.3271	-	34.0	74	54	-	-20.0
2.3648	-	40.4	74	54	-	-13.6
18.4193	48.9	-	84	64	-35.1	
20.4907	54.4	-	84	64	-29.6	
20.5124	58.5	-	84	64	-25.5	
20.6341	-	34.0	84	64		-30.0
23.9053	-	38.3	84	64		-25.7
23.8833	59.9		84	64		
23.9137	62.5		84	64		

**Table 23 - 2402 MHz - 1 GHz to 26 GHz – Radiated Emissions Results**

All other emissions that were detected are within the unrestricted bands and are therefore at least 20 dB from the applicable test limit.

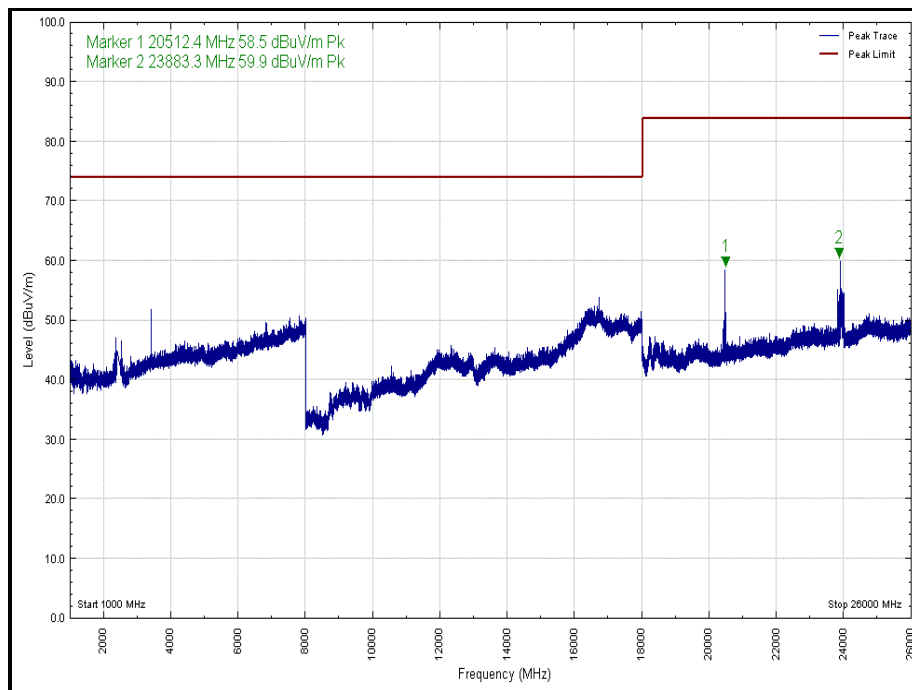

**Figure 38 - 2402 MHz - 1 GHz to 26 GHz, Polarisation: Horizontal (Peak)**

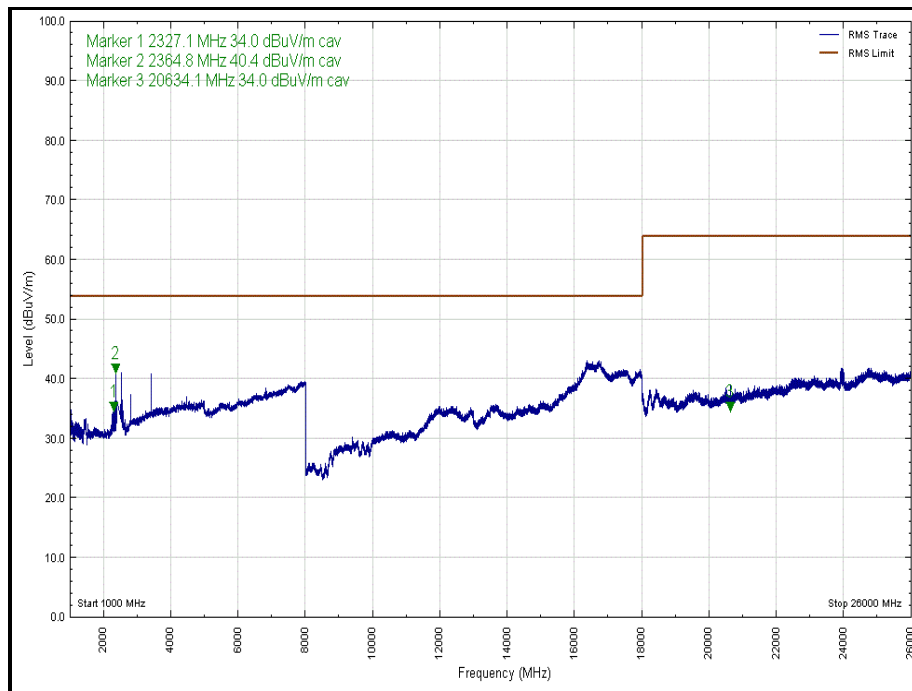


Figure 39 - 2402 MHz - 1 GHz to 26 GHz, Polarisation: Horizontal (Average)

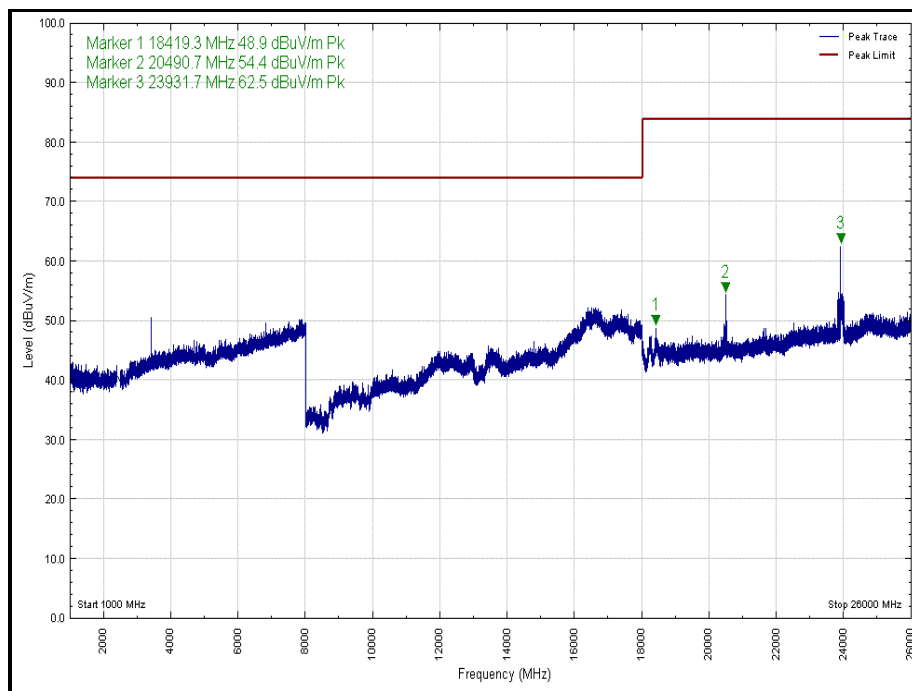


Figure 40 - 2402 MHz - 1 GHz to 26 GHz, Polarisation: Vertical (Peak)

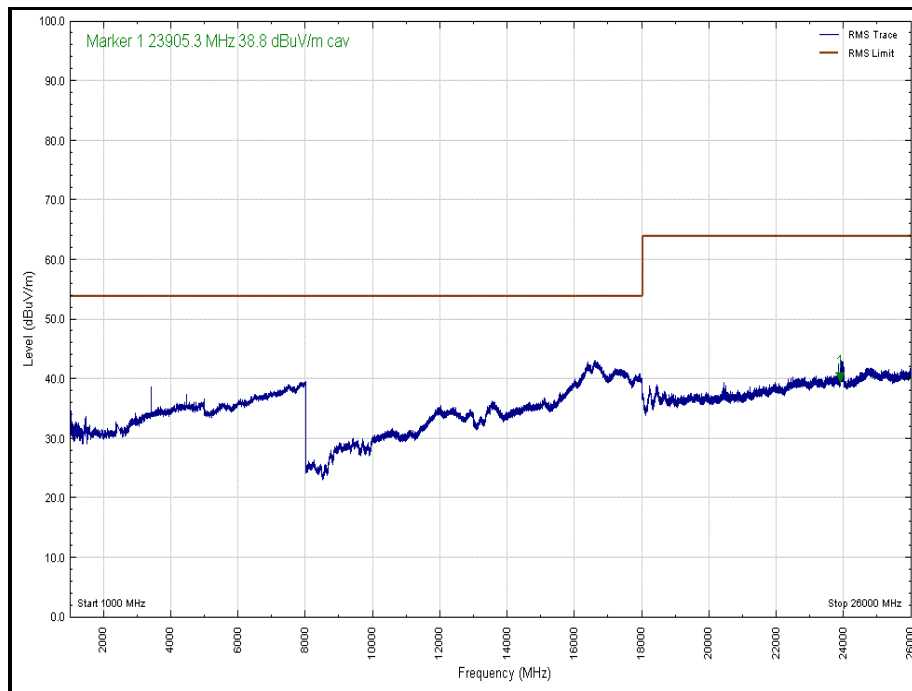


Figure 41 - 2402 MHz - 1 GHz to 26 GHz, Polarisation: Vertical (Average)



Frequency (GHz)	Result (dBµV/m)		Limit (dBµV/m)		Margin (dB)	
	Peak	Average	Peak	Average	Peak	Average
2.3289	-	33.2	74	54	-	-20.8
2.3661	-	36.2	74	54	-	-17.8
2.3664	-	34.2	74	54	-	-19.8
7.3224	-	40.6	74	54	-	-13.4
19.1365	48.2	-	84	64	-35.8	-
20.5010	56.9	-	84	64	-27.1	-
20.5130	59.7	-	84	64	-24.3	-
23.8270	-	37.4	84	64	-	-26.6
23.8403	-	38.8	84	64	-	-25.2
23.8544	64.8	-	84	64	-19.2	-
23.8850	59.4	-	84	64	-24.6	-

**Table 24 - 2440 MHz - 1 GHz to 26 GHz – Radiated Emissions Results**

All other emissions that were detected are within the unrestricted bands and are therefore at least 20 dB from the applicable test limit.



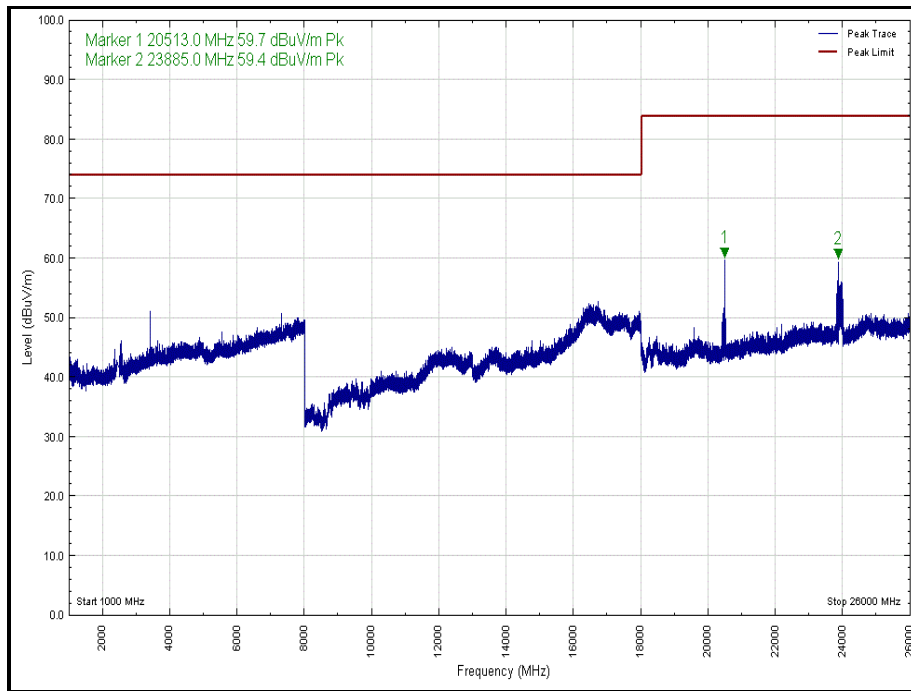


Figure 42 - 2440 MHz - 1 GHz to 26 GHz, Polarisation: Horizontal (Peak)

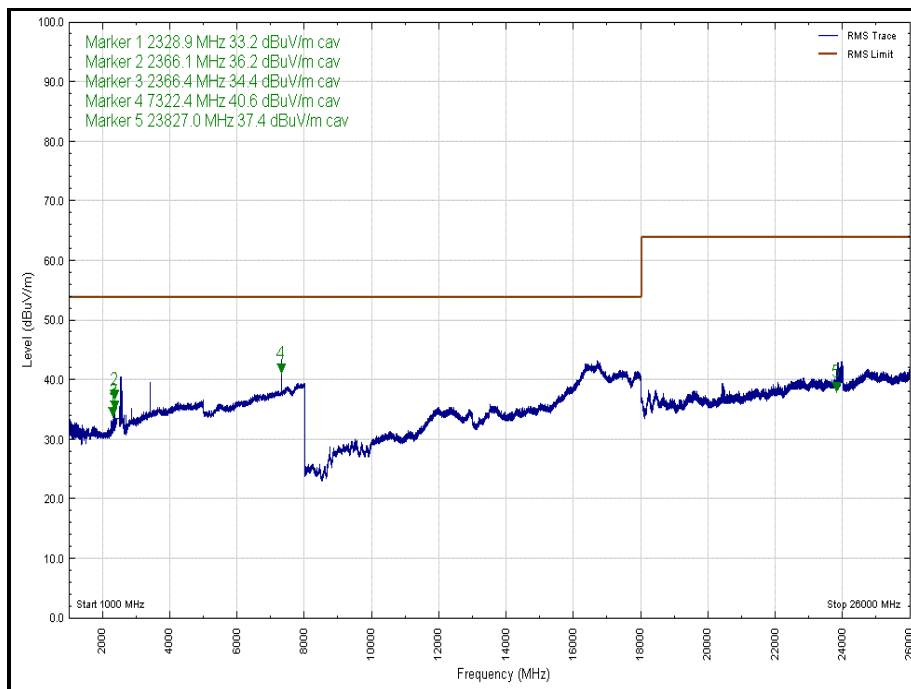


Figure 43 - 2440 MHz - 1 GHz to 26 GHz, Polarisation: Horizontal (Average)

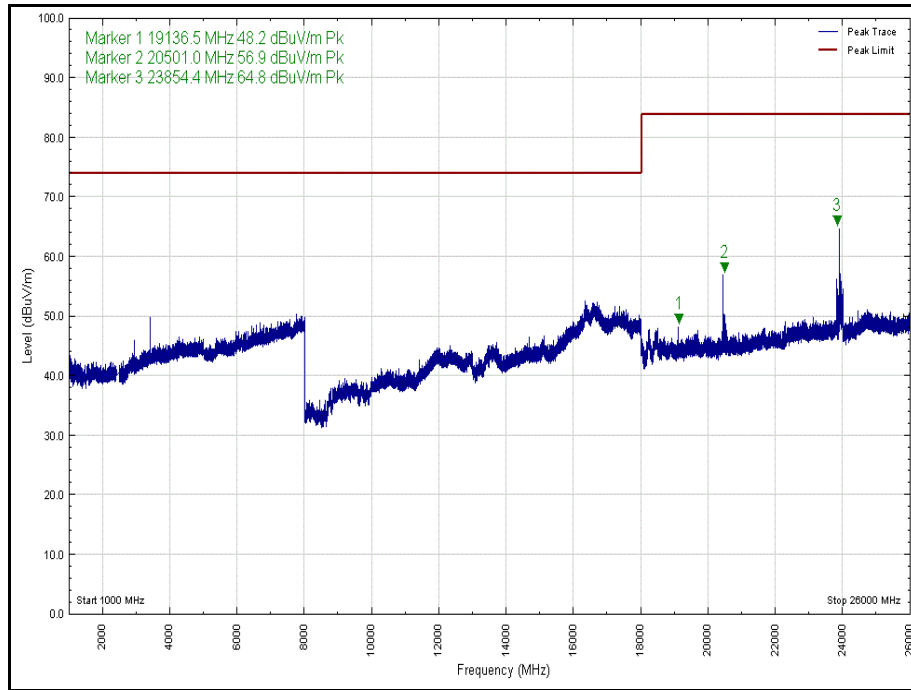


Figure 44 - 2440 MHz - 1 GHz to 26 GHz, Polarisation: Vertical (Peak)

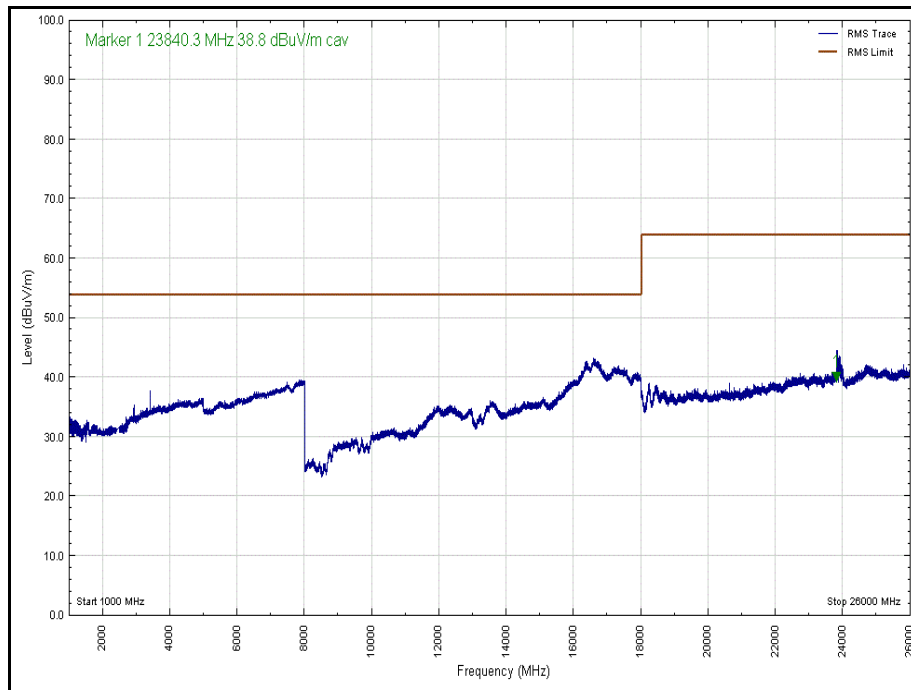


Figure 45 - 2440 MHz - 1 GHz to 26 GHz, Polarisation: Vertical (Average)



Frequency (GHz)	Result (dBµV/m)		Limit (dBµV/m)		Margin (dB)	
	Peak	Average	Peak	Average	Peak	Average
2.3678	-	34.6	74	54	-	-19.4
23.8669	-	37.2	84	64	-	-26.8
20.5114	60.3		84	64	-23.7	-64.0
20.5146	61.8	-	84	64	-22.2	-
23.8519	61.8	-	84	64	-22.2	-
23.8669	-	32.7	84	64	-	-31.3
23.9328	72.9	-	84	64	-11.1	-
23.9290	-	38.0	84	64	-	-26.0
25.1093	51.3	-	84	64	-32.7	-

**Table 25 - 2480 MHz - 1 GHz to 26 GHz – Radiated Emissions Results**

All other emissions that were detected are within the unrestricted bands and are therefore at least 20 dB from the applicable test limit.

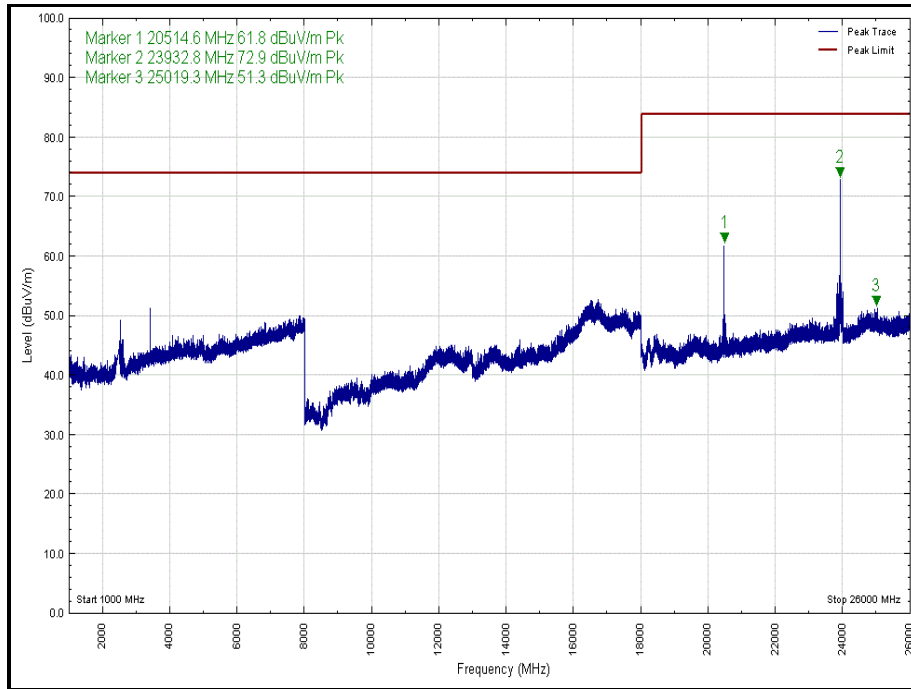


Figure 46 - 2480 MHz - 1 GHz to 26 GHz, Polarisation: Horizontal (Peak)

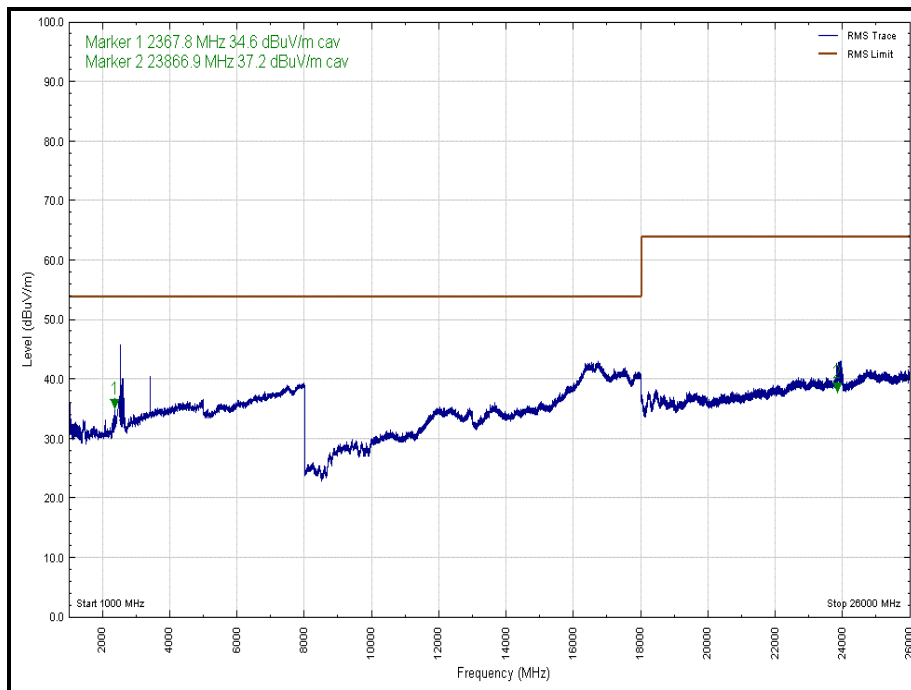


Figure 47 - 2480 MHz - 1 GHz to 26 GHz, Polarisation: Horizontal (Average)

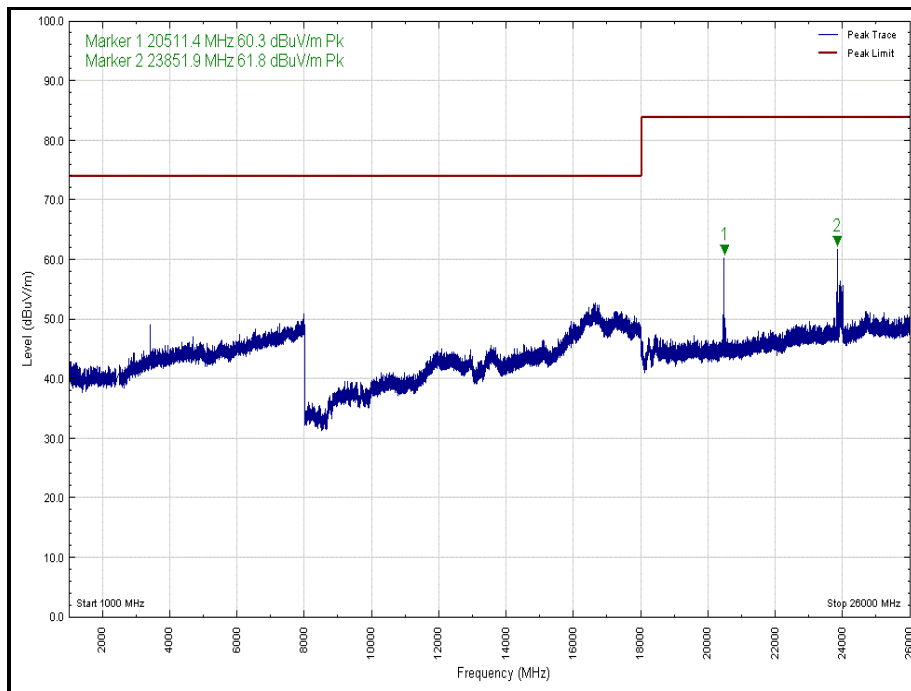


Figure 48 - 2480 MHz - 1 GHz to 26 GHz, Polarisation: Vertical (Peak)

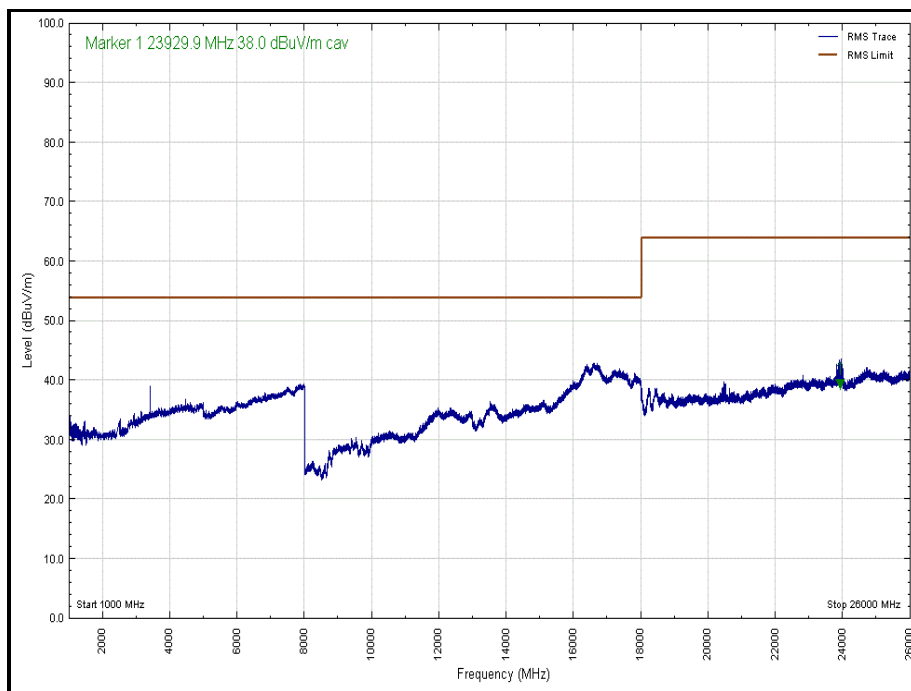


Figure 49 - 2480 MHz - 1 GHz to 26 GHz, Polarisation: Vertical (Average)



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

Industry Canada RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



### 2.8.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5 and RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Antenna with permanent attenuator (Bilog)	Schaffner	CBL6143	287	24	15-May-2020
10dB/1W SMA Attenuator dc - 18GHz	Seaelectro	60-674-1010-89	395	-	O/P Mon
Pre-Amplifier	Phase One	PS04-0086	1533	12	08-Feb-2020
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Hygrometer	Rotronic	HYGROPALM 1	2338	12	15-Nov-2019
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	17-Dec-2019
1GHz to 8GHz Low Noise Amplifier	Wright Technologies	APS04-0085	4365	12	14-Nov-2020
Cable (Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4526	6	11-Dec-2019
High Pass Filter (4GHz)	K&L Microwave	11SH10-4000/X18000-0/0	4599	12	05-Sep-2020
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	05-Mar-2020
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	11-Mar-2020
8 - 18 GHz pre amp	Wright Technologies	PS06-0061	4971	12	07-Dec-2019
Band Reject Filter - 2.425 GHz	Wainwright	WRCGV14-2390-2400-2450-2460-50SS	5066	12	01-Oct-2020
Band Reject Filter - 2.425 GHz	Wainwright	WRCGV14-2390-2400-2450-2460-50SS	5067	12	01-Oct-2020
Band Reject Filter - 2.4585 GHz	Wainwright	WRCGV14-2423.5-2433.5-2483.5-2493.5-50SS	5068	12	01-Oct-2020
Band Reject Filter - 2.4585 GHz	Wainwright	WRCGV14-2423.5-2433.5-2483.5-2493.5-50SS	5069	12	01-Oct-2020
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	11-Nov-2019

**Table 26**

O/P Mon – Output Monitored using calibrated equipment  
 TU – Traceability Unscheduled



Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
8m N-Type RF Cable	Teledyne	PR90-088-8MTR	5093	12	06-Oct-2020
8m N-Type RF Cable	Teledyne	PR90-088-8MTR	5095	12	04-Dec-2019
Cable (18 GHz)	Rosenberger	LU7-071-1000	5102	12	06-Oct-2020
Cable (18 GHz)	Rosenberger	LU7-071-1000	5103	12	06-Oct-2020
Cable (18 GHz)	Rosenberger	LU7-071-1000	5104	12	05-Dec-2019
Cable (18 GHz)	Rosenberger	LU7-071-1000	5105	12	06-Oct-2020
Cable (18 GHz)	Rosenberger	LU7-071-2000	5107	12	06-Oct-2020
EmX Emissions Software	TUV SUD	EmX	5125	-	Software
1.5m 40GHz RF Cable	Scott Cables	KPS-1501-2000-KPS	5127	6	11-Dec-2019
Screened Room (11)	Rainford	Rainford	5136	36	01-Nov-2021
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
8 Meter Cable	Teledyne	PR90-088-8MTR	5212	12	30-Aug-2020
Horn Antenna (1-10GHz)	Schwarzbeck	BBHA 9120 B	5215	12	11-Mar-2020
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5216	12	11-Mar-2020
3 GHz High pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	5219	12	15-Feb-2020

**Table 27**

O/P Mon – Output Monitored using calibrated equipment  
 TU – Traceability Unscheduled





### 3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Maximum Conducted Output Power	± 3.2 dB
Frequency Hopping Systems - Average Time of Occupancy	-
Frequency Hopping Systems - Channel Separation	± 30.43 kHz
Frequency Hopping Systems - 20 dB Bandwidth	± 30.43 kHz
Frequency Hopping Systems - Number of Hopping Channels	-
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB

**Table 28**

#### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the result of the compliance measurement and does not take into account measurement instrumentation uncertainty. Measurement system uncertainty is calculated, as indicated above, in accordance with the appropriate guidelines detailed within the specification of test.