




ELEMENT MATERIALS TECHNOLOGY

(formerly PCTEST)
18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 408.538.5600
<http://www.element.com>



MEASUREMENT REPORT Part 96 C2PC Test Report

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

05/30/2022-09/09/2022

Test Report Issue Date:

6/7/2023

Test Site/Location:

Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.:

1C2305090017-01.BCG

FCC ID:

BCGA2435

Applicant Name:

Apple Inc.

Application Type:

Certification

Model:

A2435

EUT Type:

Tablet Device

FCC Classification:

Citizens Band End User Devices (CBE)

FCC Rule Part:

96

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016,
KDB 971168 D01 v03r01, KDB 940660 D01 v03,
WINNF-TS-0122 v1.0.2

Class II Permissive Change:

Please see FCC change document

Original Grant Date:

10/18/2022

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President




FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 1 of 69


V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	Element Materials Technology Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description.....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration.....	7
2.6	Software and Firmware.....	7
2.7	EMI Suppression Device(s)/Modifications.....	7
3.0	DESCRIPTION OF TESTS.....	8
3.1	Measurement Procedure.....	8
3.2	Radiated Spurious Emissions.....	8
4.0	MEASUREMENT UNCERTAINTY.....	9
5.0	TEST EQUIPMENT CALIBRATION DATA.....	10
6.0	SAMPLE CALCULATIONS.....	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Occupied Bandwidth.....	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal.....	25
7.4	Band Edge Emissions at Antenna Terminal.....	33
7.5	Peak-Average Ratio.....	40
7.6	Radiated Power (EIRP).....	51
7.7	Radiated Spurious Emissions.....	57
7.8	Frequency Stability / Temperature Variation.....	64
7.9	End User Device Additional Requirement (CBSD Protocol).....	66
8.0	CONCLUSION.....	69

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 2 of 69




PART 96 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	EIRP		Emission Designator
						Max. Power [W]	Max. Power [dBm]	
NR Band n48	10 MHz	$\pi/2$ BPSK	3555.0 - 3695.0	8.7249	4.00	0.158	22.00	8M72G7W
		QPSK	3555.0 - 3695.0	8.6807	5.32	0.158	22.00	8M68G7W
		16QAM	3555.0 - 3695.0	8.7213	6.16	0.126	21.02	8M72D7W
		64QAM	3555.0 - 3695.0	8.6906	6.44	0.100	20.01	8M69D7W
		256QAM	3555.0 - 3695.0	8.7096	6.57	0.052	17.12	8M71D7W
	20 MHz	$\pi/2$ BPSK	3560.0 - 3690.0	18.0560	3.82	0.158	22.00	18M1G7W
		QPSK	3560.0 - 3690.0	18.3154	5.24	0.158	22.00	18M3G7W
		16QAM	3560.0 - 3690.0	18.3401	6.00	0.126	21.00	18M3D7W
		64QAM	3560.0 - 3690.0	18.3462	6.18	0.100	20.00	18M3D7W
		256QAM	3560.0 - 3690.0	18.3482	6.13	0.051	17.11	18M3D7W
	30 MHz	$\pi/2$ BPSK	3565.0 - 3685.0	26.9843	3.99	0.158	22.00	27M0G7W
		QPSK	3565.0 - 3685.0	28.0173	5.31	0.158	22.00	28M0G7W
		16QAM	3565.0 - 3685.0	28.0193	5.97	0.127	21.05	28M0D7W
		64QAM	3565.0 - 3685.0	27.9961	6.22	0.100	20.02	28M0D7W
		256QAM	3565.0 - 3685.0	27.9782	6.06	0.052	17.15	28M0D7W
	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	35.8145	3.53	0.158	22.00	35M8G7W
		QPSK	3570.0 - 3680.0	37.9173	5.06	0.158	22.00	37M9G7W
		16QAM	3570.0 - 3680.0	38.0449	5.90	0.126	21.01	38M0D7W
		64QAM	3570.0 - 3680.0	37.9391	6.14	0.100	20.02	37M9D7W
		256QAM	3570.0 - 3680.0	37.9908	6.20	0.051	17.10	38M0D7W

EUT Overview

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 3 of 69

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.


1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is a CBRS Alliance (OnGo) Approved Test Lab
- Element Materials Technology is a WInnForum Approved Test Lab
- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for CBRS Alliance Certification Test Plan and WInnForum Conformance and Performance Test Technical Standard.
- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 4 of 69

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID:BCGA2435**. The test data contained in this report pertains only to the emissions due to the EUT's NR FR1 n48 operation in the CBRS band. Per FCC Part 96, this device is evaluated under Citizens Band End User Devices (CBE).

Test Device Serial No.: VL9QPR2R16, TVDFT4T9CV, V68MLB20069

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1/FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT, NB UNII (1x, HDR4, HDR8)

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.


Antenna	Simultaneous Tx Config	WiFi 2.4GHz	Bluetooth	NB UNII	WiFi 5GHz	WiFi 6GHz	LTE / FR1 NR
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	BDR, HDR4/8	802.11 a/n/ac/ax	802.11 a/ax	Ultra High Band
2a	Config 1	✓	✗	✗	✗	✗	✓
2a	Config 2	✗	✓	✗	✗	✗	✓
4a	Config 3	✓	✗	✓	✗	✗	✗
4a	Config 4	✗	✓	✗	✓	✗	✗

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

1. All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Bluetooth and LTE B48. Results can be found on RF Bluetooth and RF Part 96 Test Reports.
2. Wi-Fi 2.4GHz and Bluetooth 2.4 GHz can transmit simultaneously on separate antennas. For BT (2.4 GHz) in connected mode and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4 GHz) in disconnected mode and Wi-Fi (2.4 GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 5 of 69

2.3 Antenna Description

The following antenna gains provided by manufacturer were used for testing.


Band	Antenna Gain [dBi]			
	Antenna 3	Antenna 1	Antenna 4b	Antenna 2a
NR Band n48	0.0	-1.2	-1.6	1.8

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02DV7VKMD6T
	w/AC/DC Adapter	Model:	A2166	S/N:	N/A
2	Apple USB-C Cable	Model:	Spartan	S/N:	000MKTR02U
	USB-C Cable	Model:	A246	S/N:	N/A
3	w/ AC Adapter	Model:	A2305	S/N:	N/A
	Apple Pencil	Model:	N/A	S/N:	GQXGSXBJKM9
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-3. Test Support Equipment

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 6 of 69

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.


All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

2.6 Software and Firmware

The test was conducted with firmware version 20A8359 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 7 of 69

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI C63.26-2015, TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$


And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.


Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 8 of 69

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 9 of 69

5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
Agilent Technologies	N9020A	MXA Signal Analyzer	4/26/2022	Annual	4/26/2023	MY56470202
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	1/19/2022	Annual	1/19/2023	T058701-02
ETS-Lindgren	3142E	Biconilog Antenna (26-6000MHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18GHz)	10/25/2021	Annual	10/25/2022	227597
ETS-Lindgren	SU-241	Table Top Temperature Chamber	10/6/2021	Annual	10/6/2022	92009574
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz-6GHz)	1/6/2022	Annual	1/6/2023	102328
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	1/30/2023	Annual	1/30/2024	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	FSVA3044	Signal Analyzer (up to 44 GHz)	5/12/2022	Annual	5/12/2023	101098
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546
Rohde & Schwarz	TC-TA18	Cross-Polarized Antenna 400MHz-18GHz	2/23/2023	Annual	2/23/2025	101072
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz-18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz-40GHz)	4/18/2022	Annual	4/18/2023	100050

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 10 of 69

6.0 SAMPLE CALCULATIONS

Emission Designator

$\pi/2$ BPSK / QPSK Modulation

Emission Designator = 8M62G7W

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W

BW = 8.45 MHz

D = Amplitude/Angle Modulated


7 = Quantized/Digital Info

W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 11 of 69

V2.1 11/9/2021


7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2435
 FCC Classification: Citizens Band End User Devices (CBE)
 Mode(s): NR


Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 96.41(e)(ii)	-13 dBm/MHz at frequencies within 0-B MHz of channel edge (where B is the bandwidth of the assigned channel) -25 dBm/MHz at frequencies greater than B MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Peak-Average Ratio	96.41(g)	< 13 dB	PASS	Section 7.5
	Frequency Stability	2.1055	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
	End User Device Additional Requirements (CBSD Protocol)	96.47	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.	PASS	Section 7.9
	Equivalent Isotropic Radiated Power (EIRP)	96.41(b)	23 dBm/10MHz	PASS	Section 7.6
RADIATED	Radiated Spurious Emissions	2.1053, 96.41(e)	-40 dBm/MHz	PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 12 of 69

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized was Element EMC Software Tool 1.1.

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 13 of 69

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

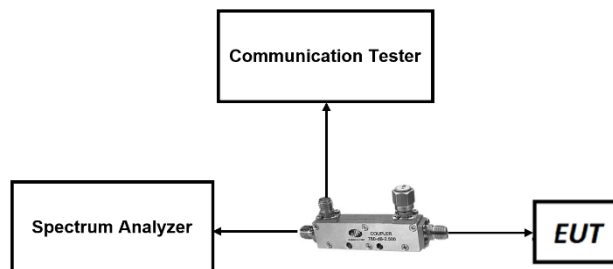



Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.


FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 14 of 69

V2.1 11/9/2021

NR Band n48

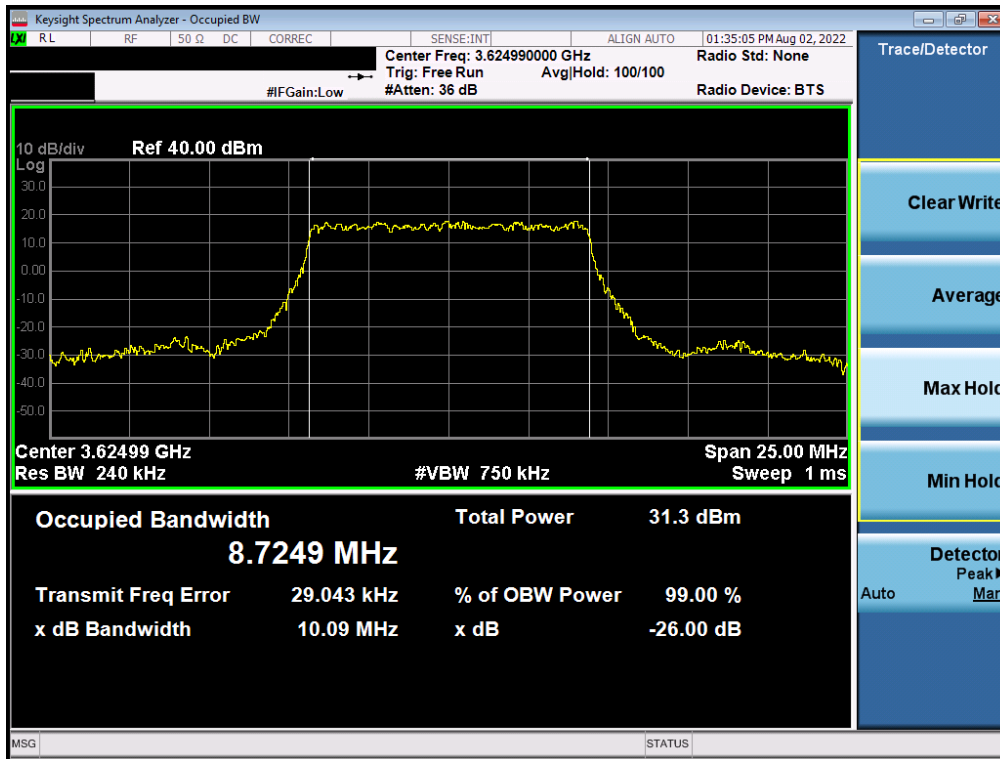


Plot 7-1. Occupied Bandwidth Plot (NR Band n48 - 10MHz $\pi/2$ BPSK - Full RB Configuration)

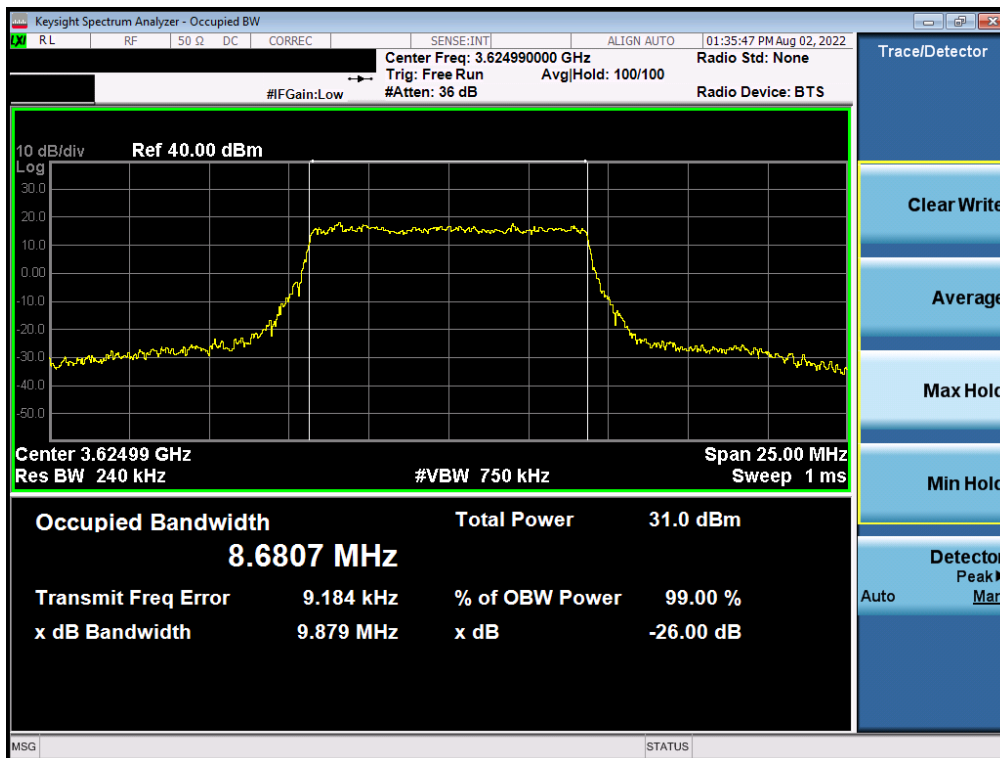


Plot 7-2. Occupied Bandwidth Plot (NR Band n48 - 10MHz QPSK - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 15 of 69

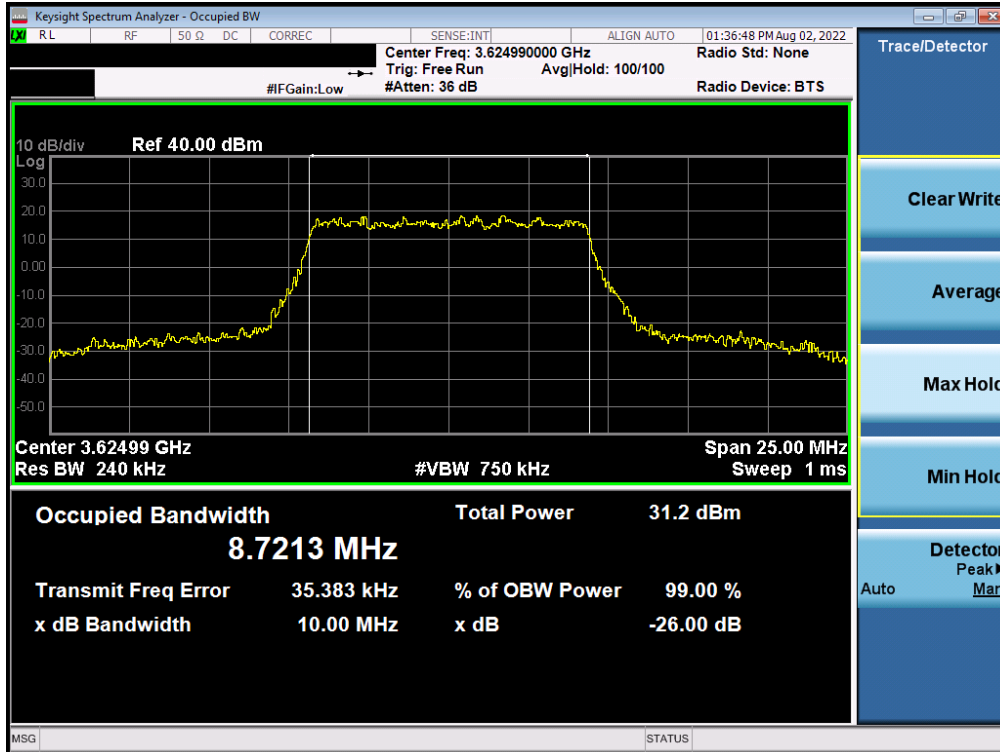


Plot 7-3. Occupied Bandwidth Plot (NR Band n48 - 10MHz 16-QAM - Full RB Configuration)

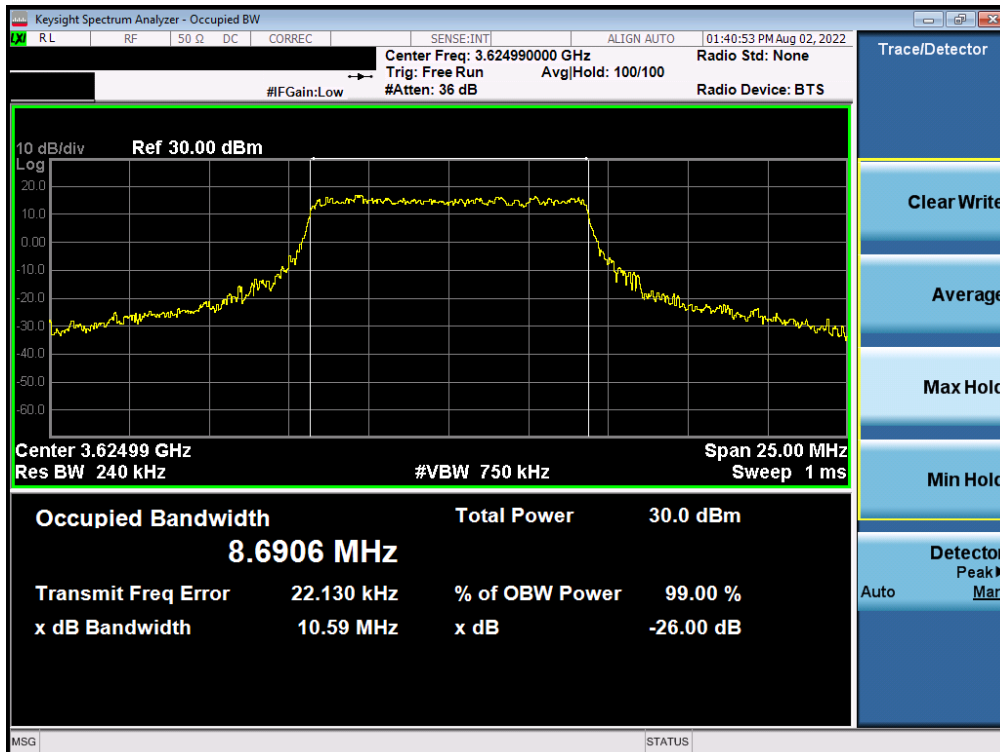


Plot 7-4. Occupied Bandwidth Plot (NR Band n48 - 10MHz 64-QAM - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 16 of 69

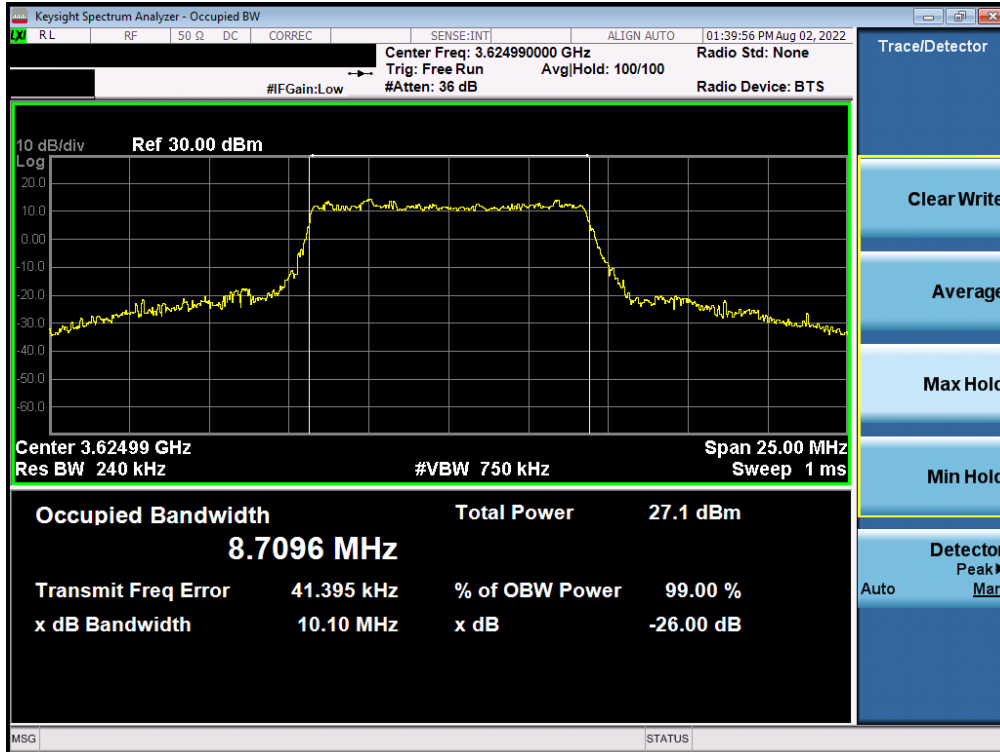


Plot 7-5. Occupied Bandwidth Plot (NR Band n48 - 10MHz 256-QAM - Full RB Configuration)

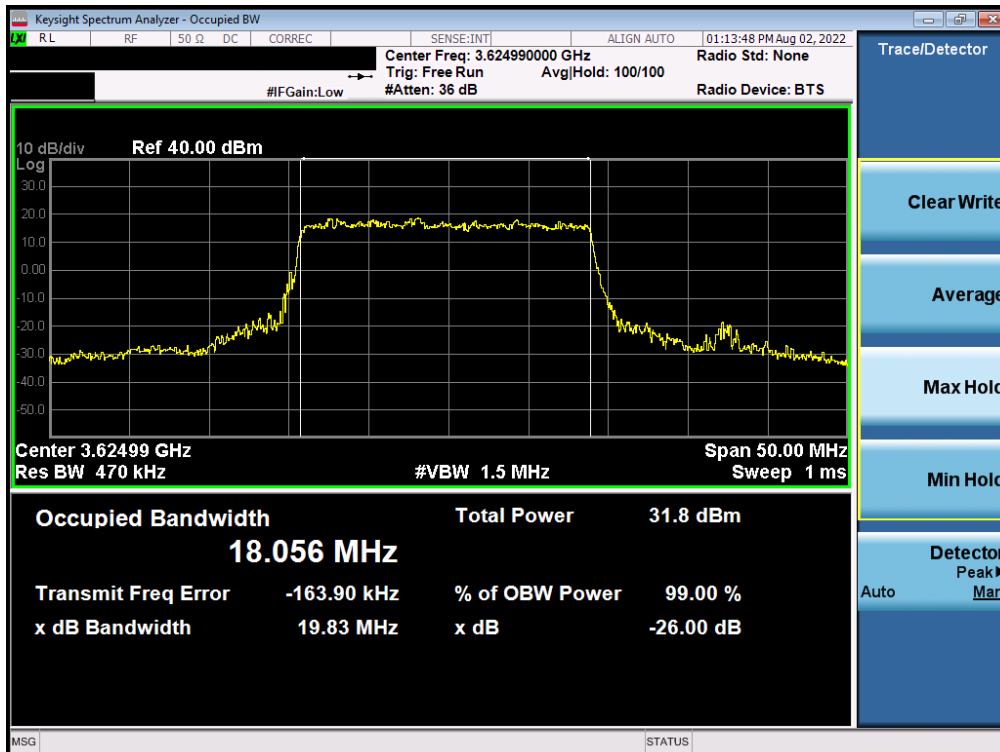


Plot 7-6. Occupied Bandwidth Plot (NR Band n48 - 20MHz $\pi/2$ BPSK - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 17 of 69

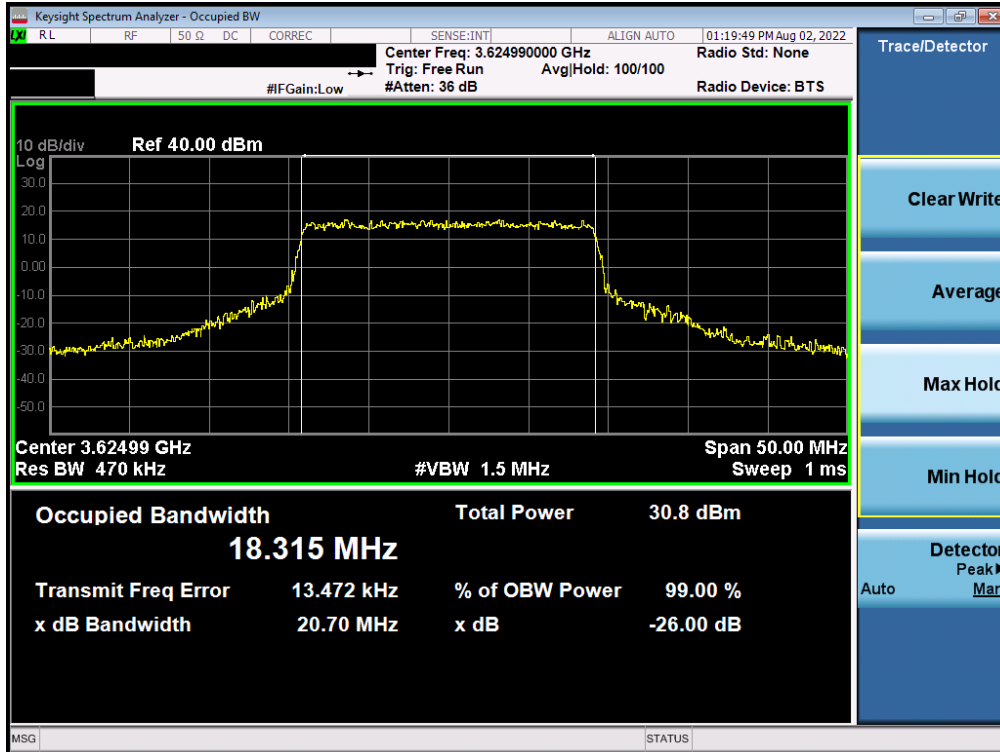

Plot 7-7. Occupied Bandwidth Plot (NR Band n48 - 20MHz QPSK - Full RB Configuration)

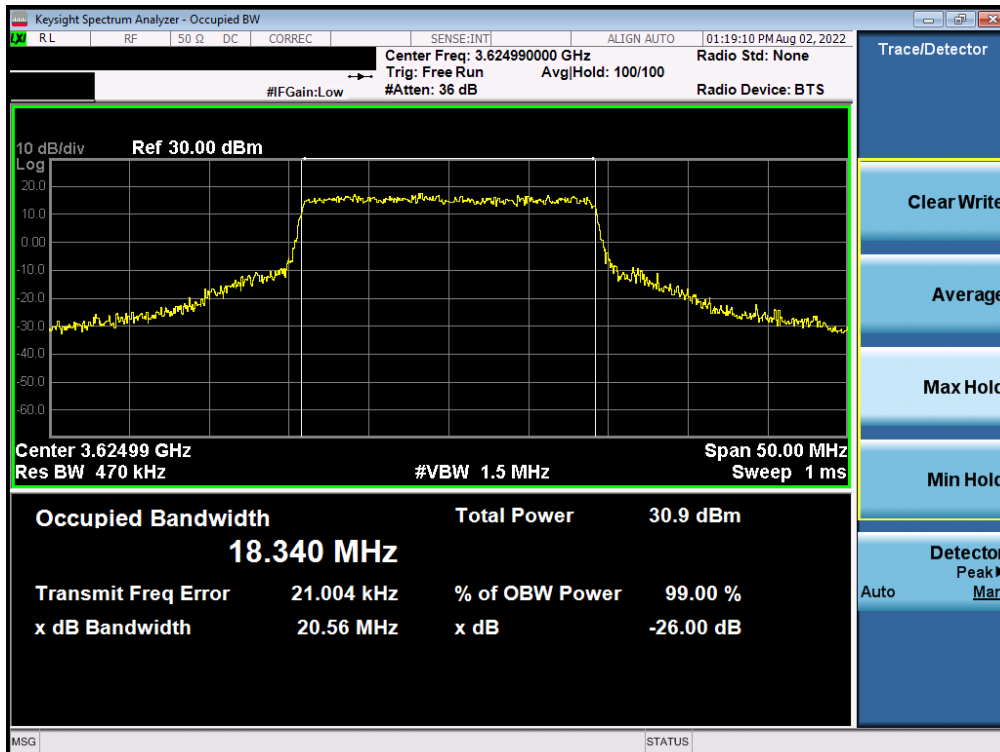


Plot 7-8. Occupied Bandwidth Plot (NR Band n48 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 18 of 69




Plot 7-9. Occupied Bandwidth Plot (NR Band n48 - 20MHz 64-QAM - Full RB Configuration)

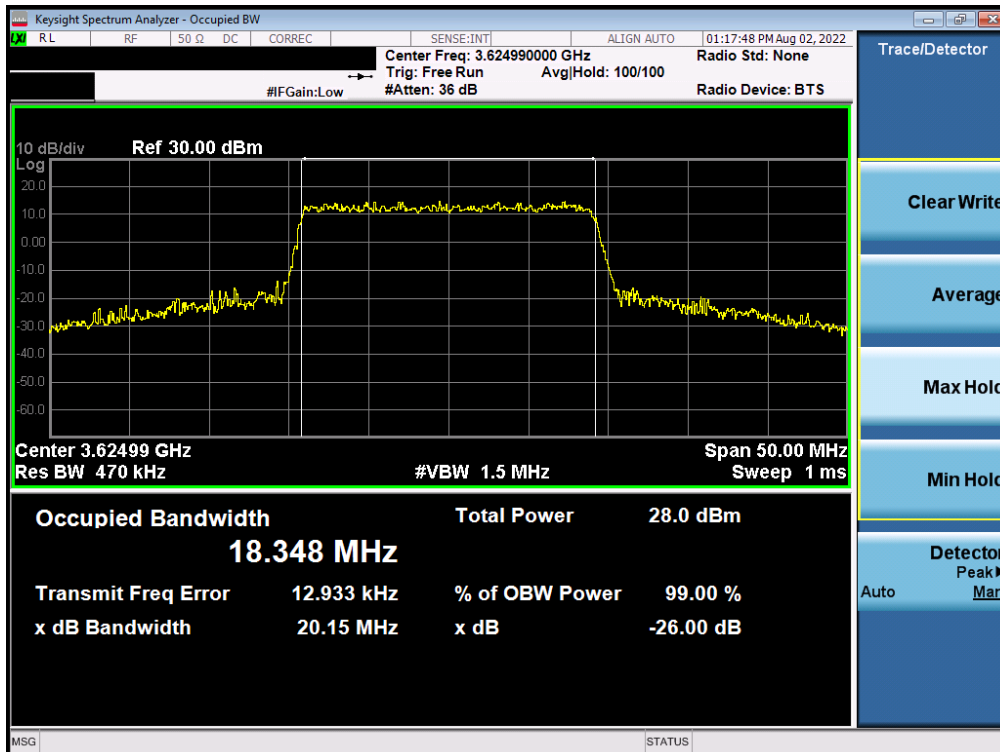


Plot 7-10. Occupied Bandwidth Plot (NR Band n48 - 20MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 19 of 69

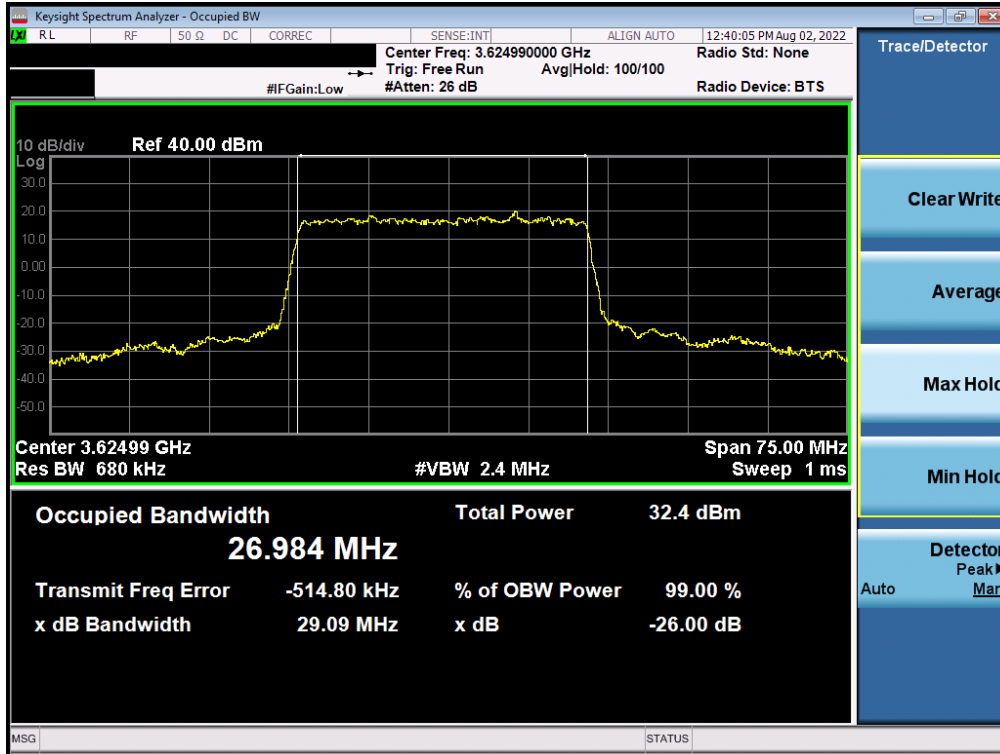


Plot 7-11. Occupied Bandwidth Plot (NR Band n48 - 30MHz $\pi/2$ BPSK - Full RB Configuration)

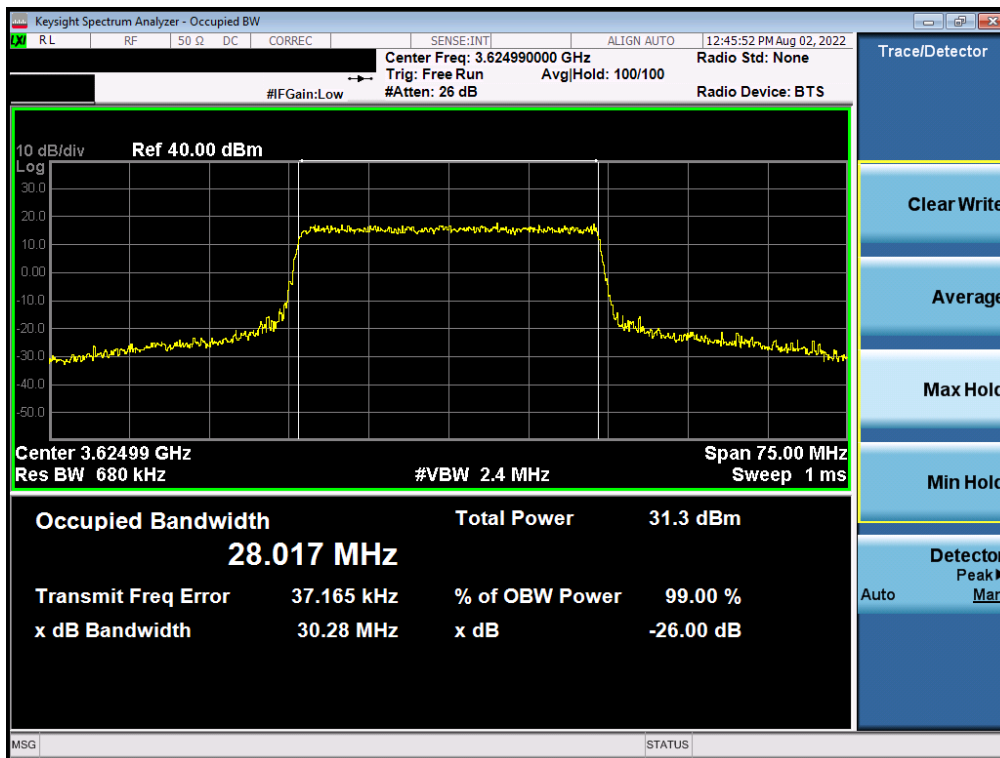

Plot 7-12. Occupied Bandwidth Plot (NR Band n48 - 30MHz QPSK - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 20 of 69

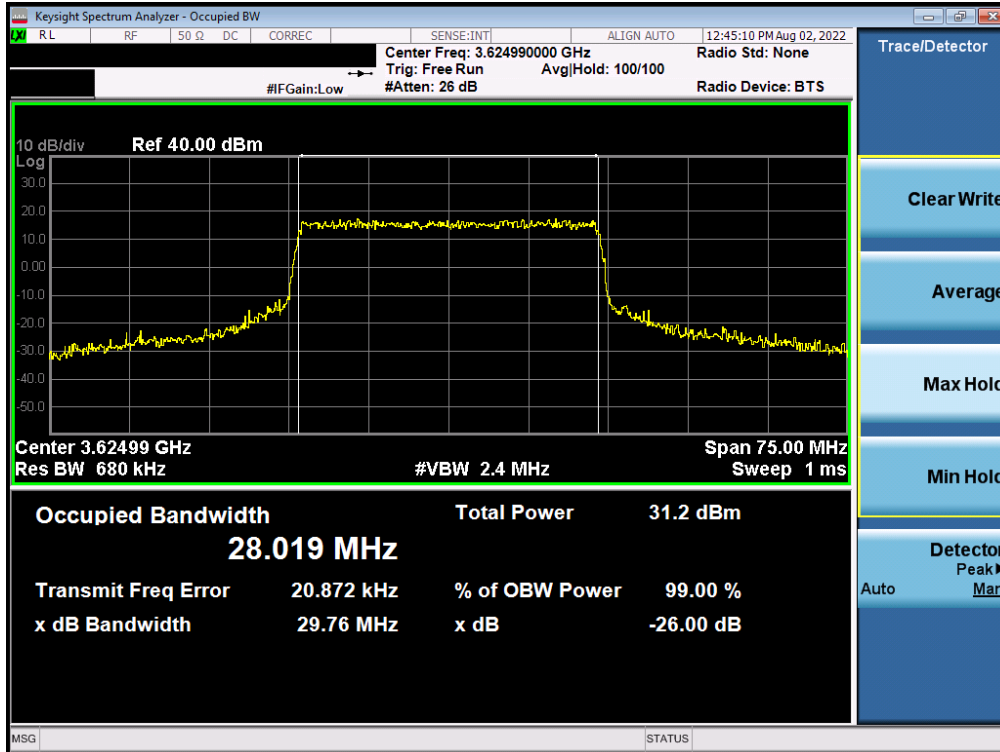


Plot 7-13. Occupied Bandwidth Plot (NR Band n48 - 30MHz 16-QAM - Full RB Configuration)




Plot 7-14. Occupied Bandwidth Plot (NR Band n48 - 30MHz 64-QAM - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 21 of 69

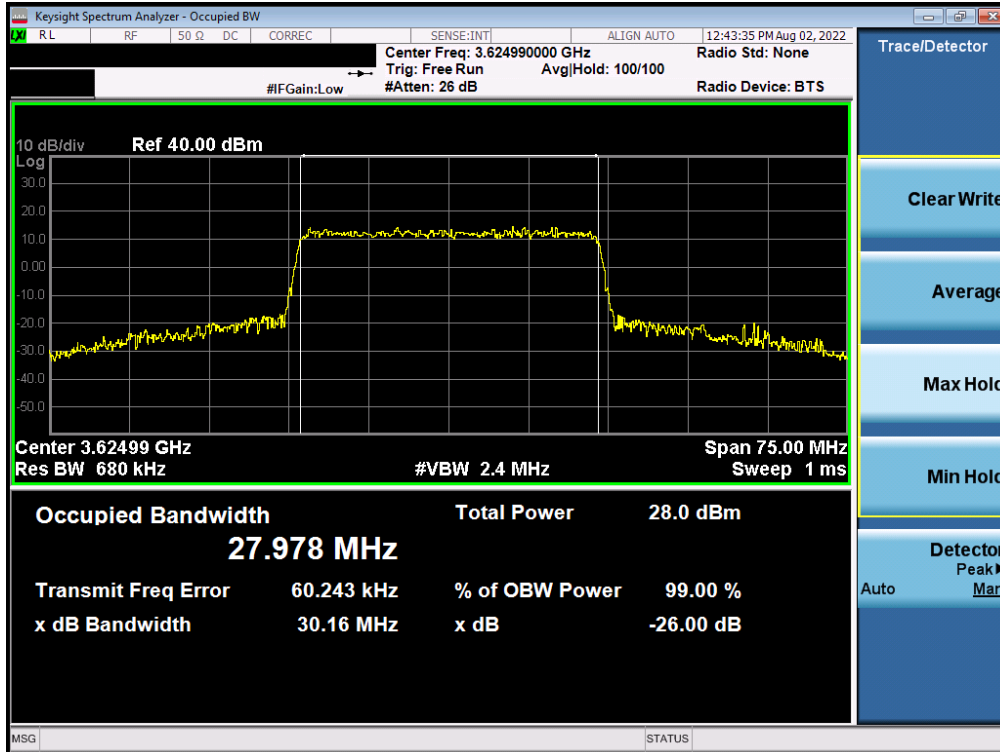


Plot 7-15. Occupied Bandwidth Plot (NR Band n48 - 30MHz 256-QAM - Full RB Configuration)

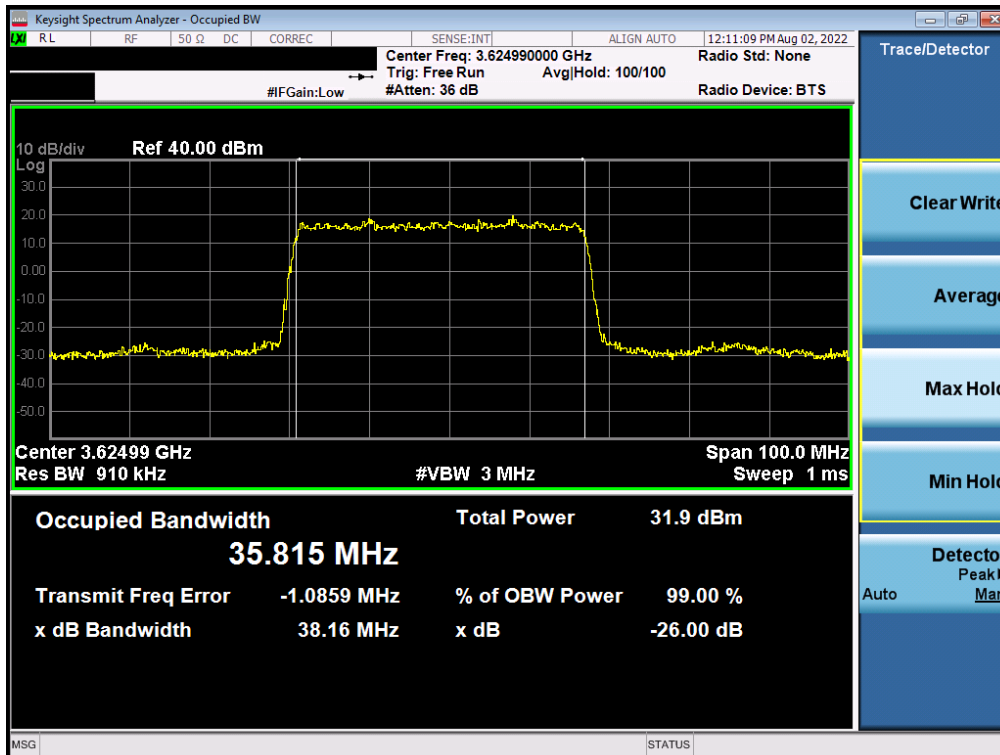


Plot 7-16. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 22 of 69

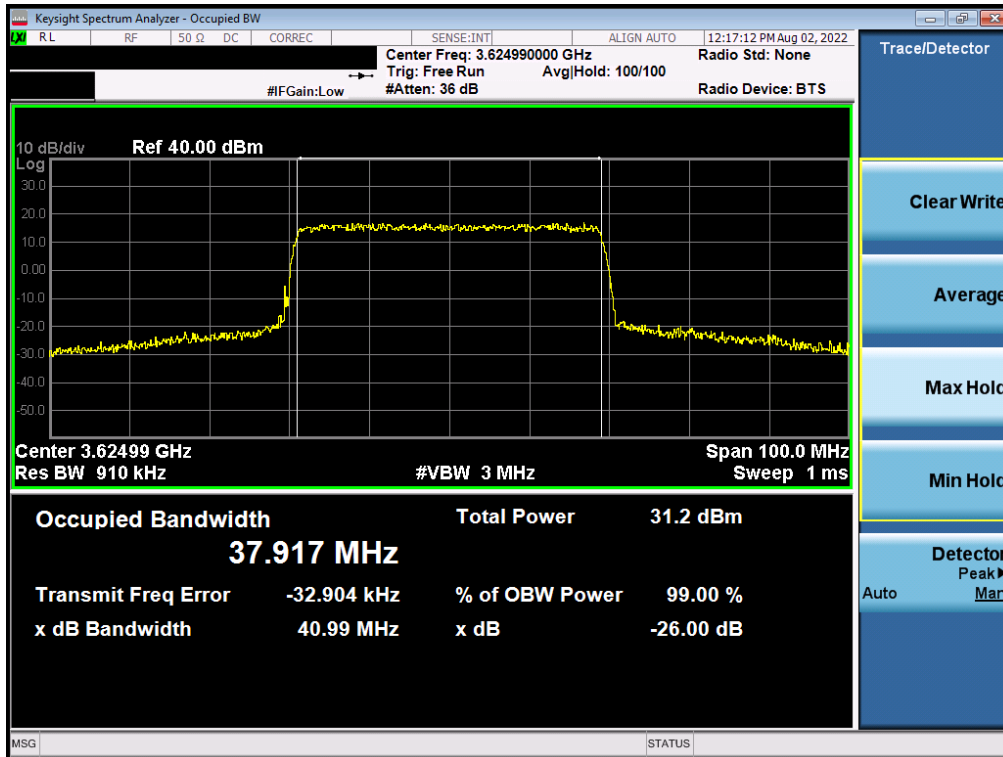


Plot 7-17. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration)

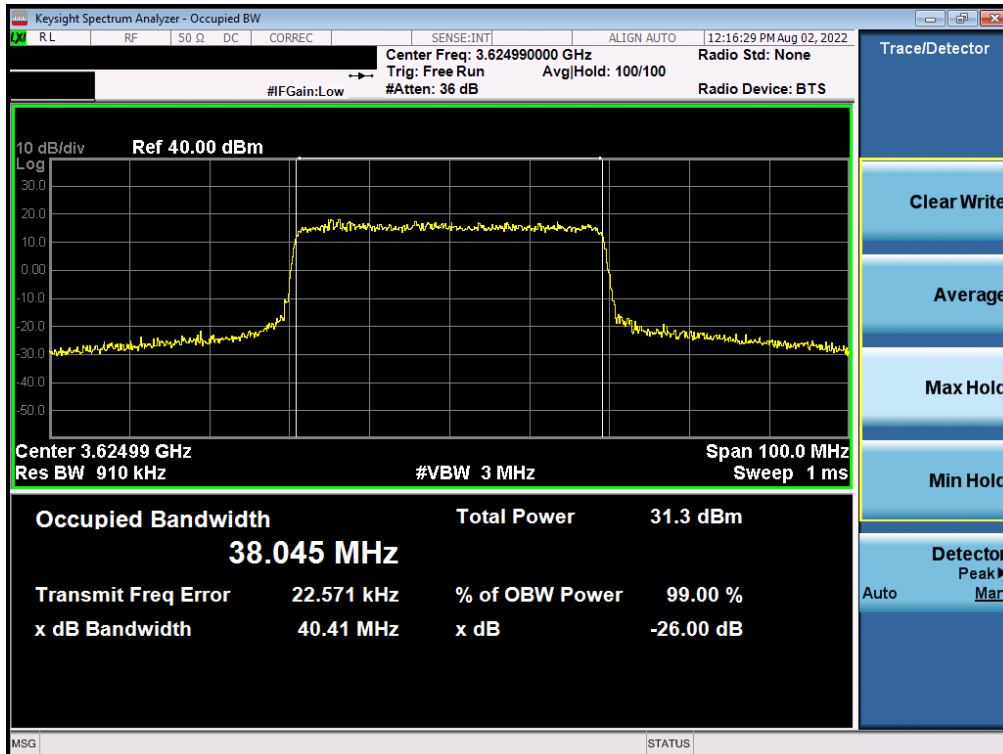


Plot 7-18. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 23 of 69

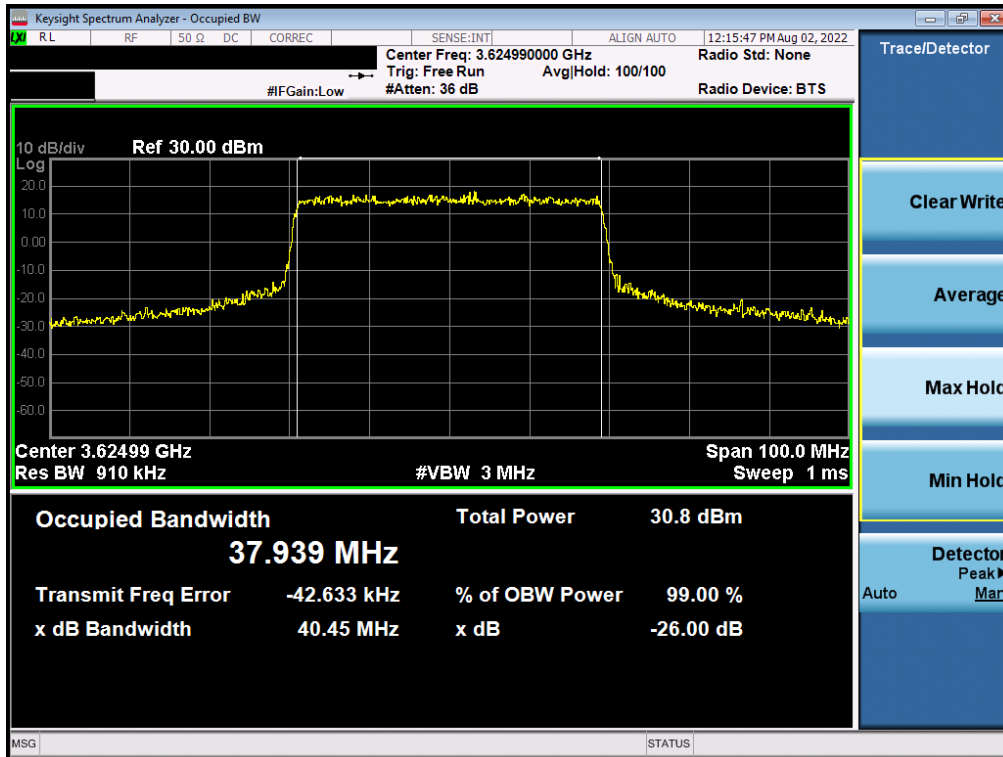

Plot 7-19. Occupied Bandwidth Plot (NR Band n48 - 40MHz 64-QAM - Full RB Configuration)

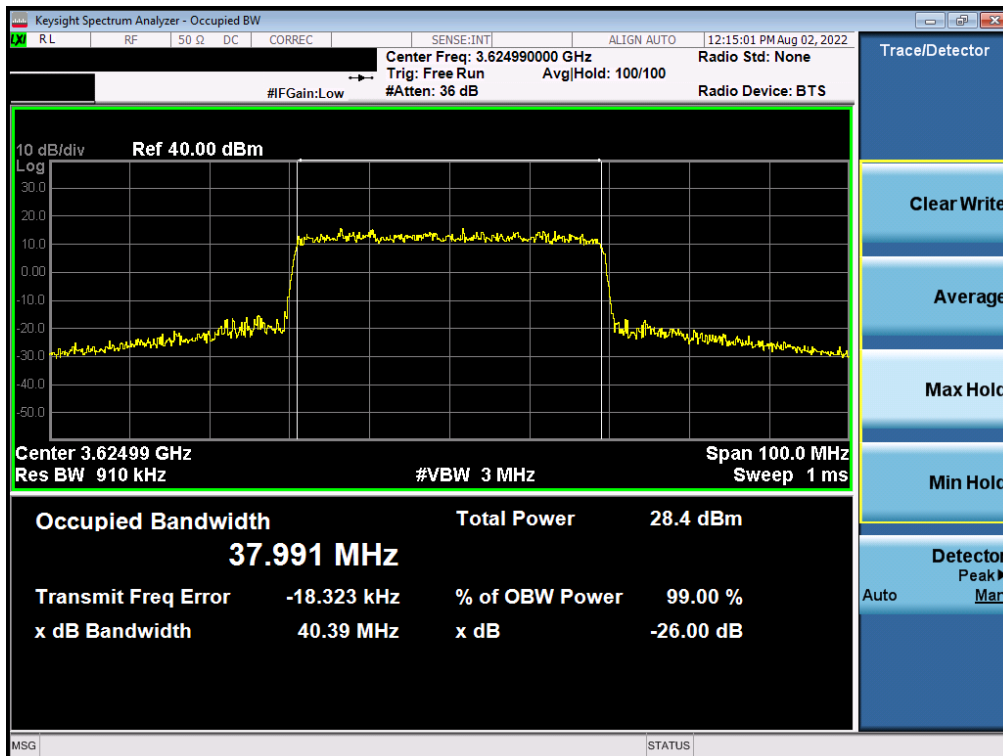

Plot 7-20. Occupied Bandwidth Plot (NR Band n48 - 40MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 24 of 69

7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051 §96.41(e)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/Mhz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

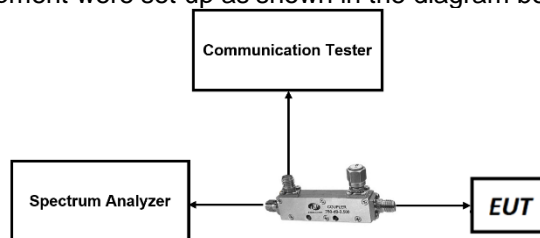





Figure 7-2. Test Instrument & Measurement Setup

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 25 of 69

Test Notes

1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 26 of 69

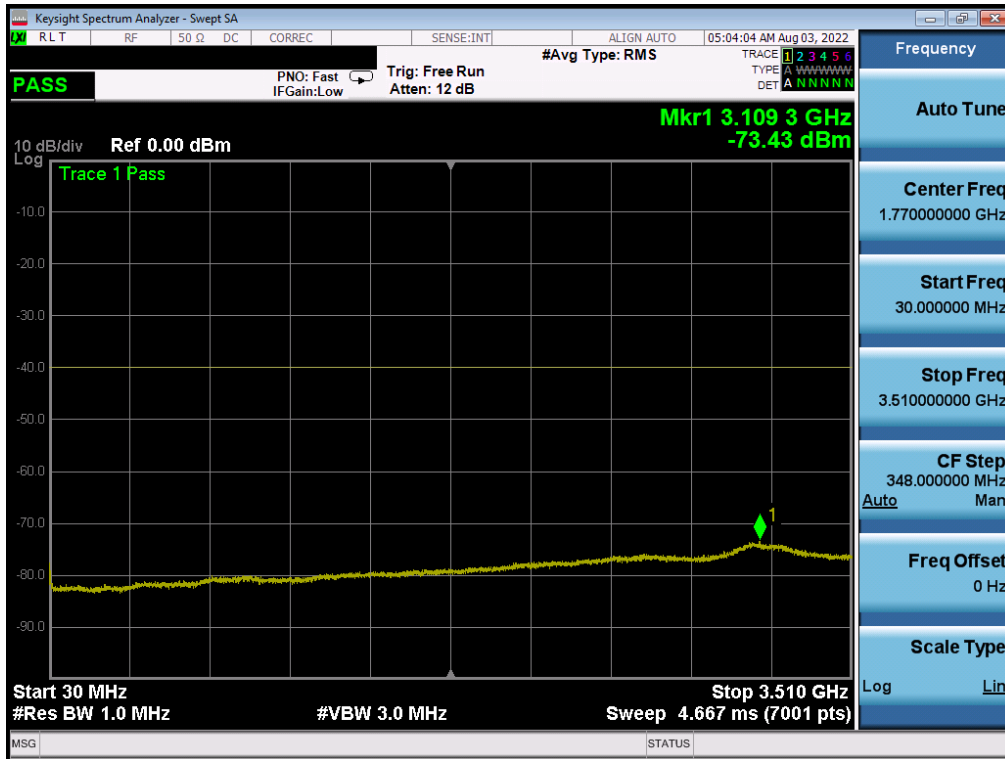

Plot 7-21. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)




Plot 7-22. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 27 of 69




Plot 7-23. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

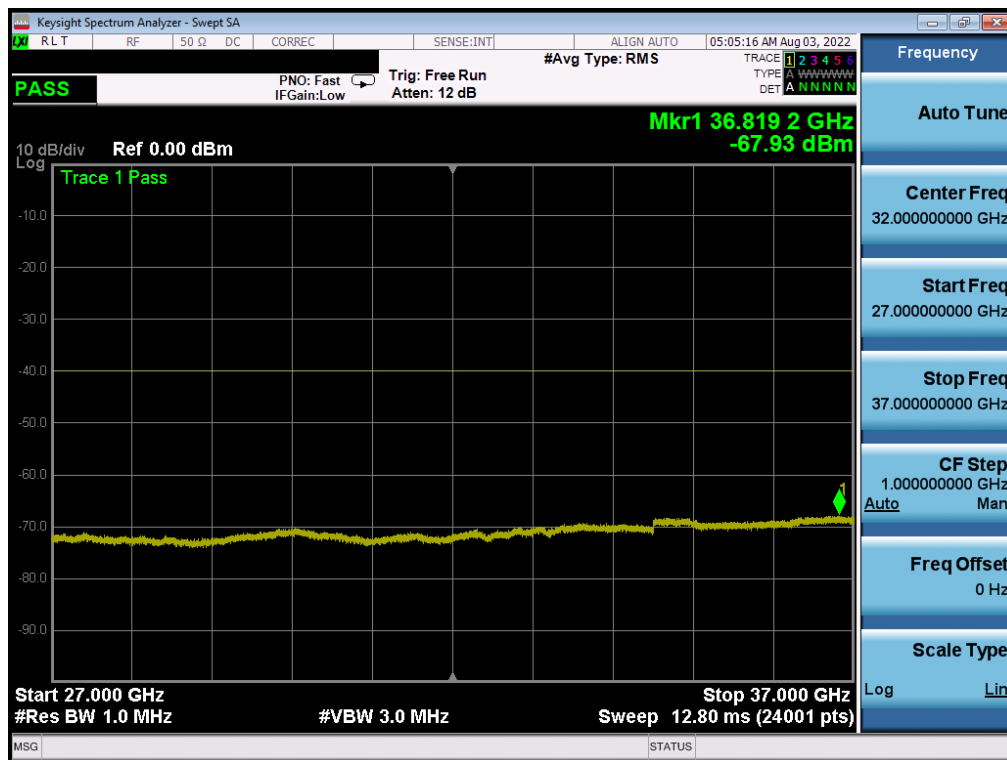

Plot 7-24. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 28 of 69

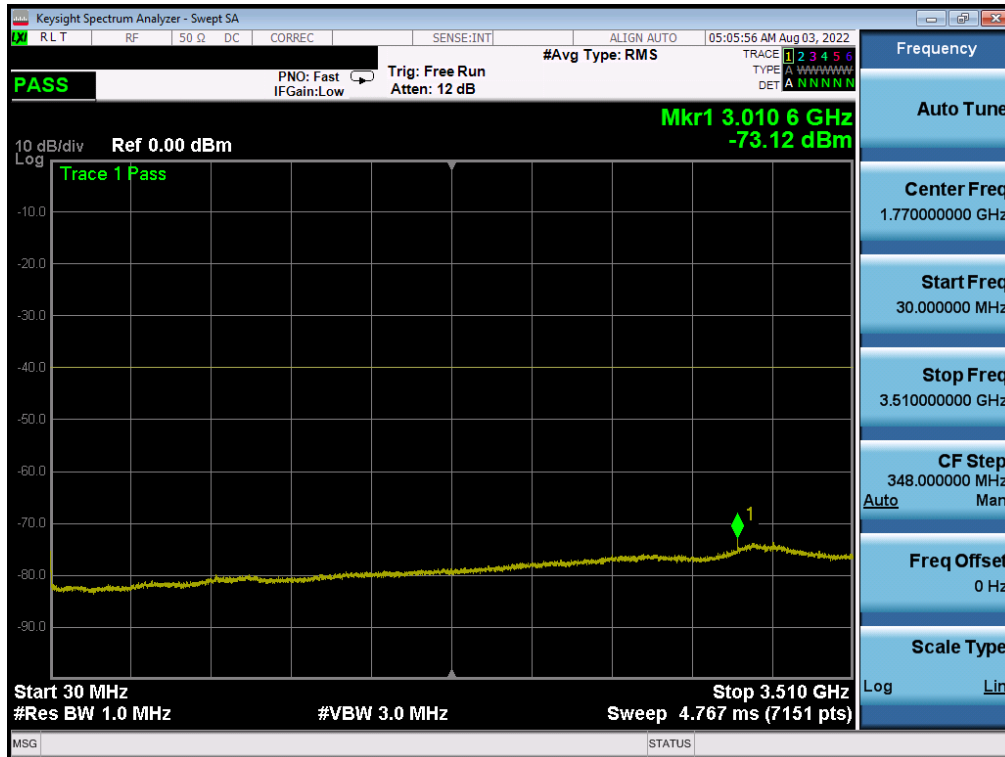

Plot 7-25. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)



Plot 7-26. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 29 of 69




Plot 7-27. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)



Plot 7-28. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 30 of 69

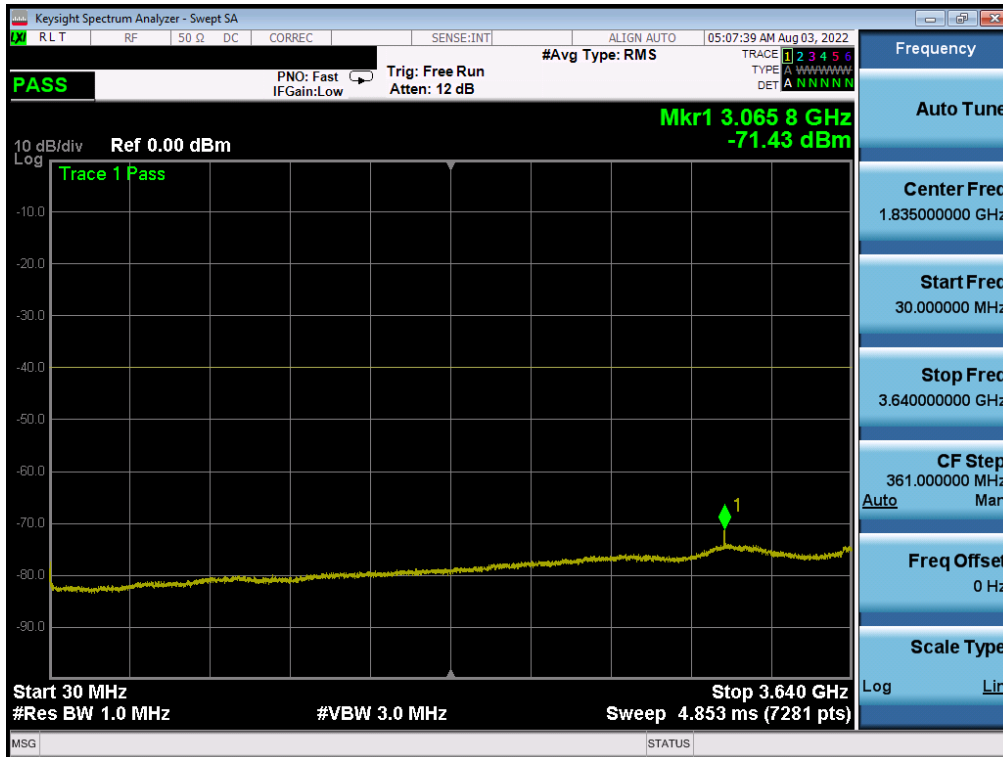

Plot 7-29. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)



Plot 7-30. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 31 of 69



Plot 7-31. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)



Plot 7-32. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 32 of 69

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §96.41(e)(ii)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation and all ports were investigated and the worst case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B MHz (where B is the bandwidth in MHz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B MHz below the lower CBSD-assigned channel edge. At all frequencies greater than B MHz above the upper CBSD assigned channel edge and less than B MHz below the lower CBSD-assigned channel edge, the conducted power of any end user device emission shall not exceed -25 dBm/MHz. The conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





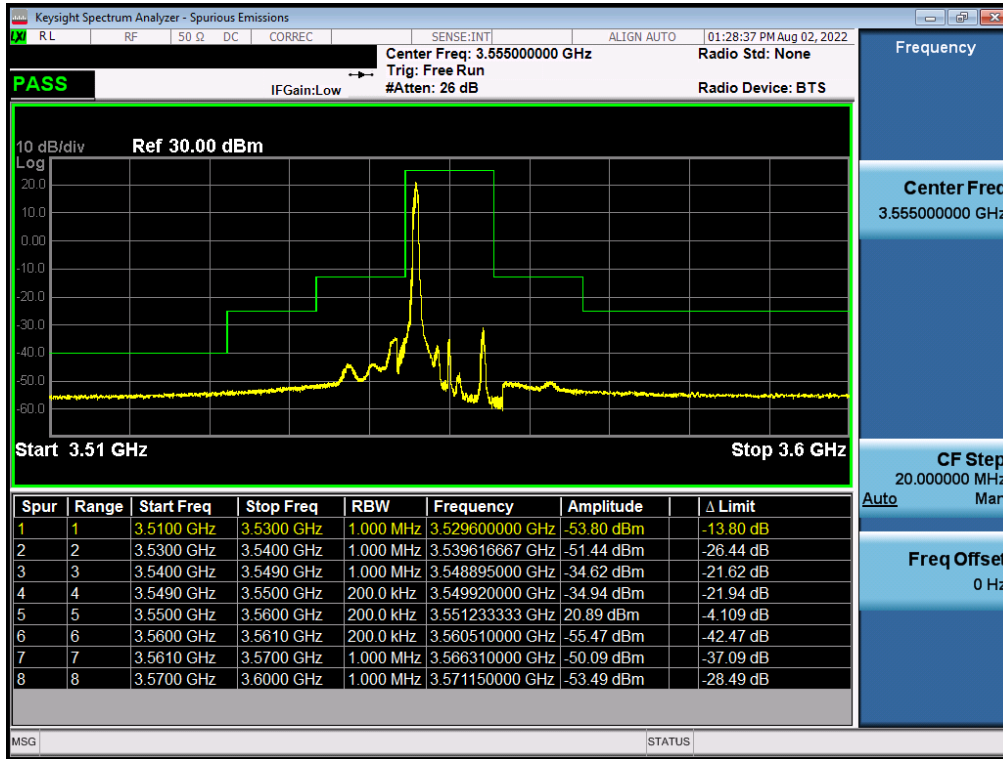
Figure 7-3. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 33 of 69

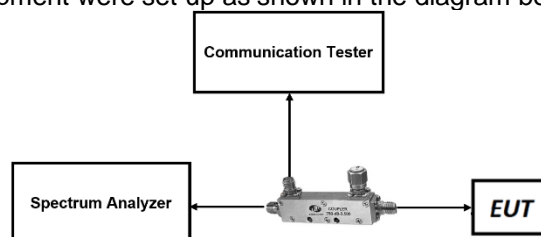V2.1 11/9/2021




Plot 7-33. Channel Edge Plot (NR Band n48 - 10MHz QPSK - Low Channel)

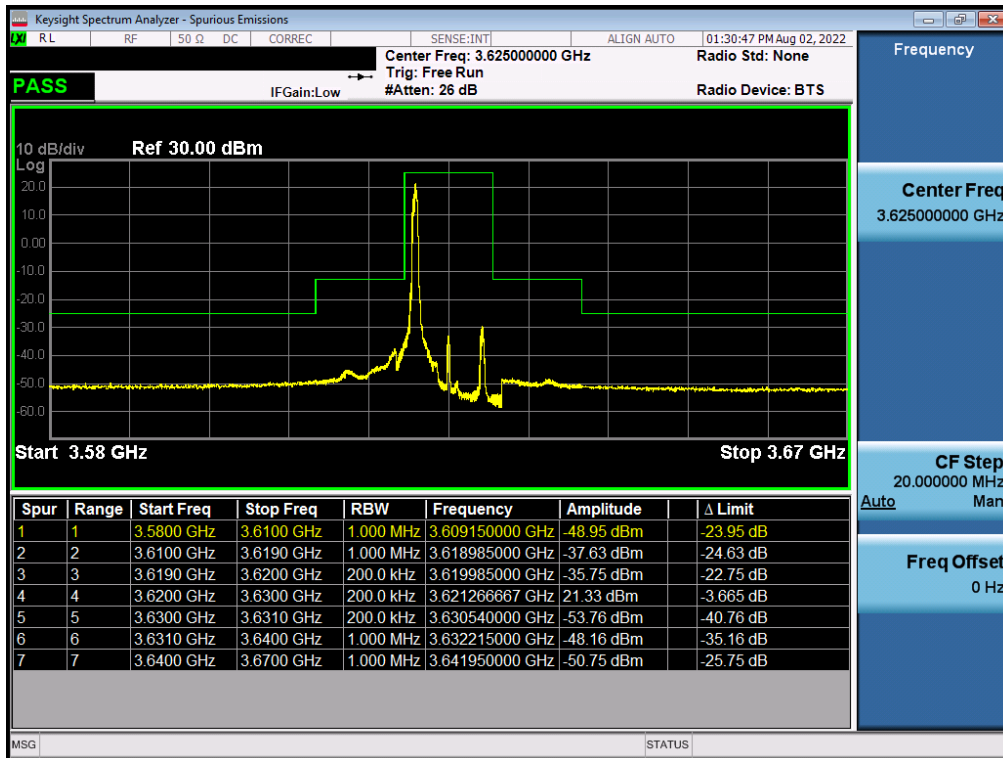


Plot 7-34. Channel Edge Plot (NR Band n48 - 10MHz QPSK - Mid Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 34 of 69

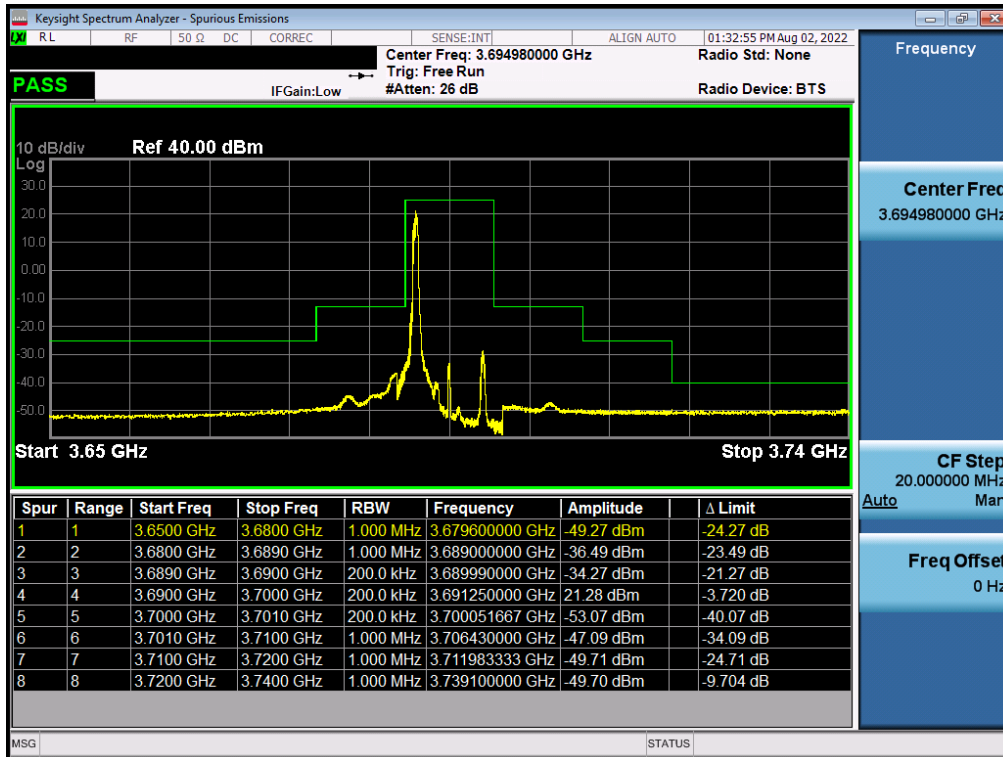


Plot 7-35. Channel Edge Plot (NR Band n48 - 10MHz QPSK - High Channel)

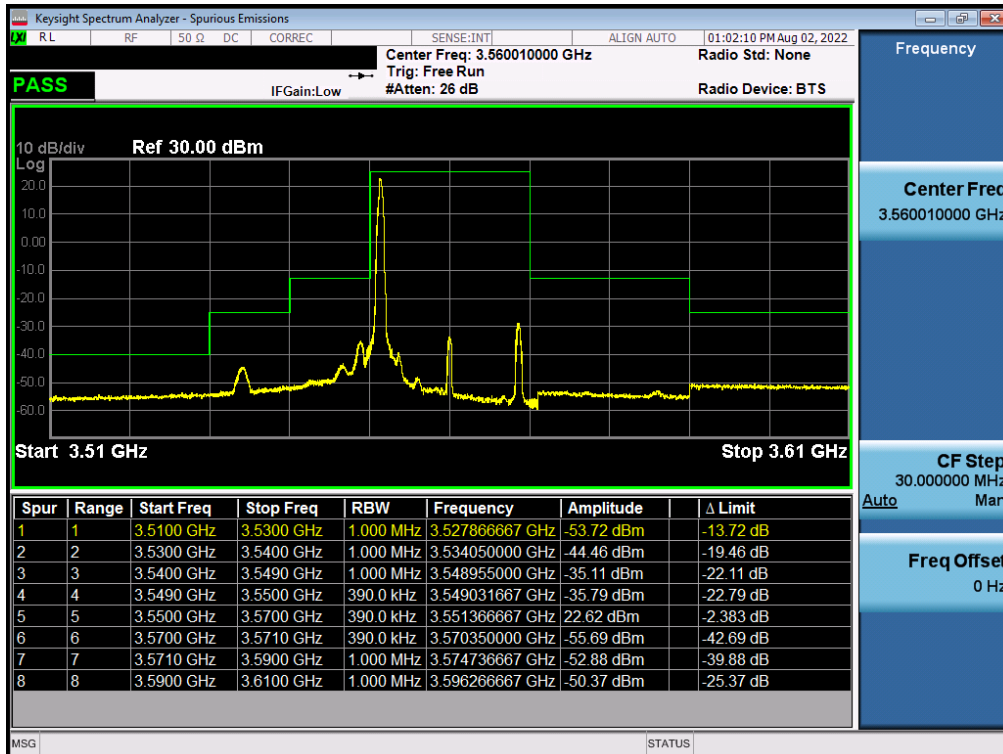


Plot 7-36. Channel Edge Plot (NR Band n48 - 20MHz QPSK - Low Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 35 of 69

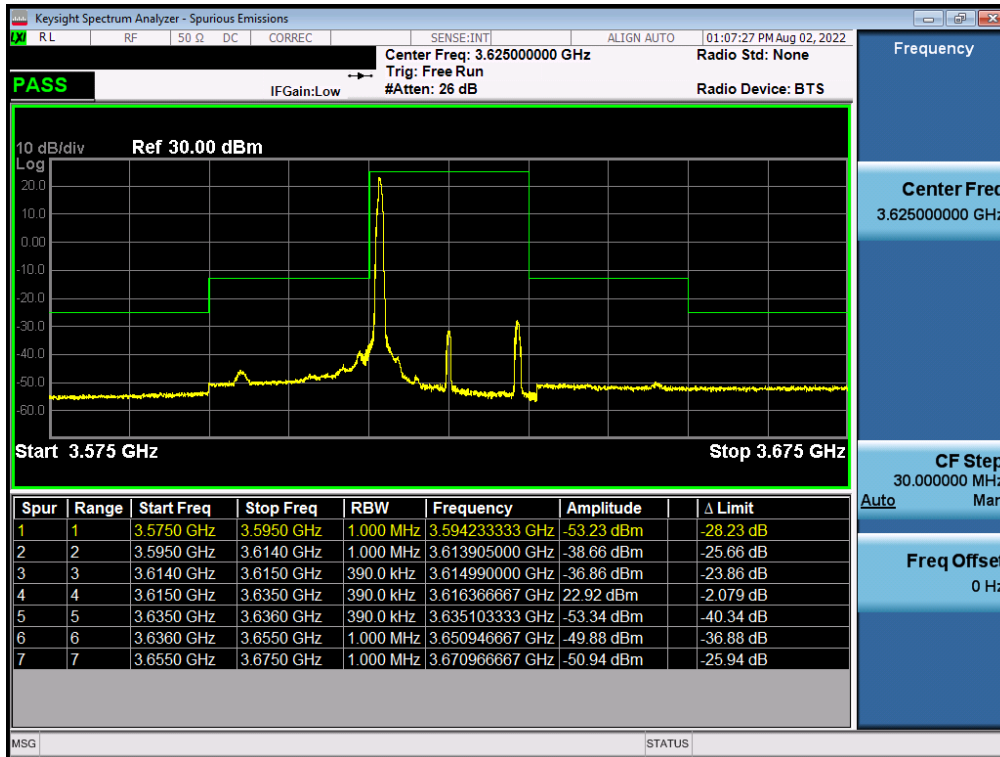


Plot 7-37. Channel Edge Plot (NR Band n48 - 20MHz QPSK - Mid Channel)

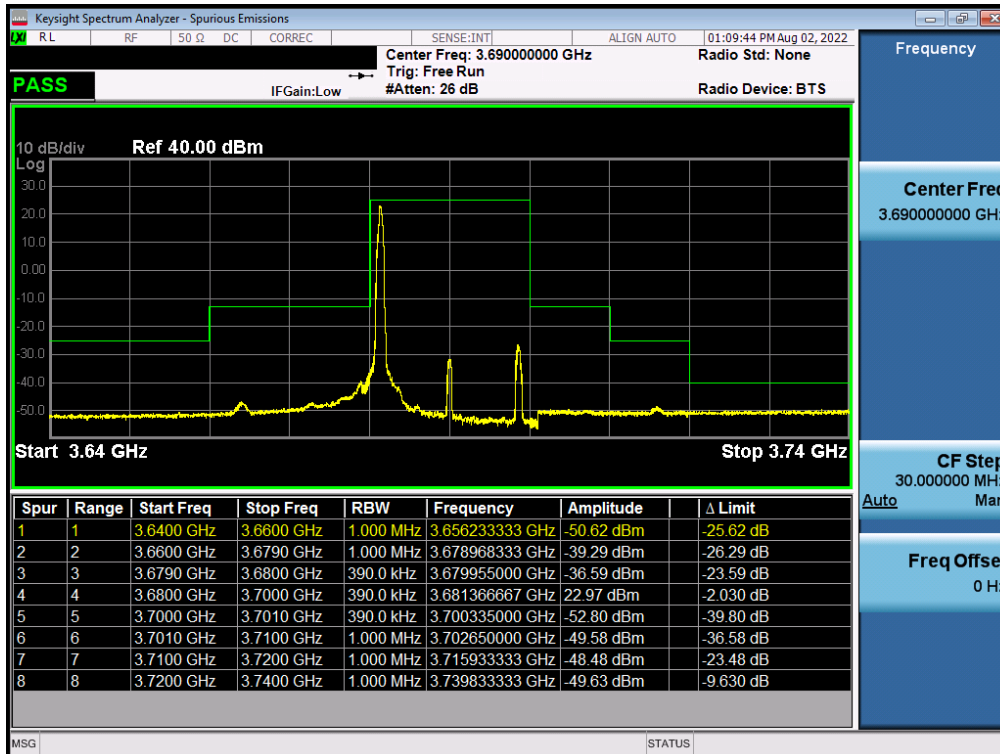


Plot 7-38. Channel Edge Plot (NR Band n48 - 20MHz QPSK - High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 36 of 69

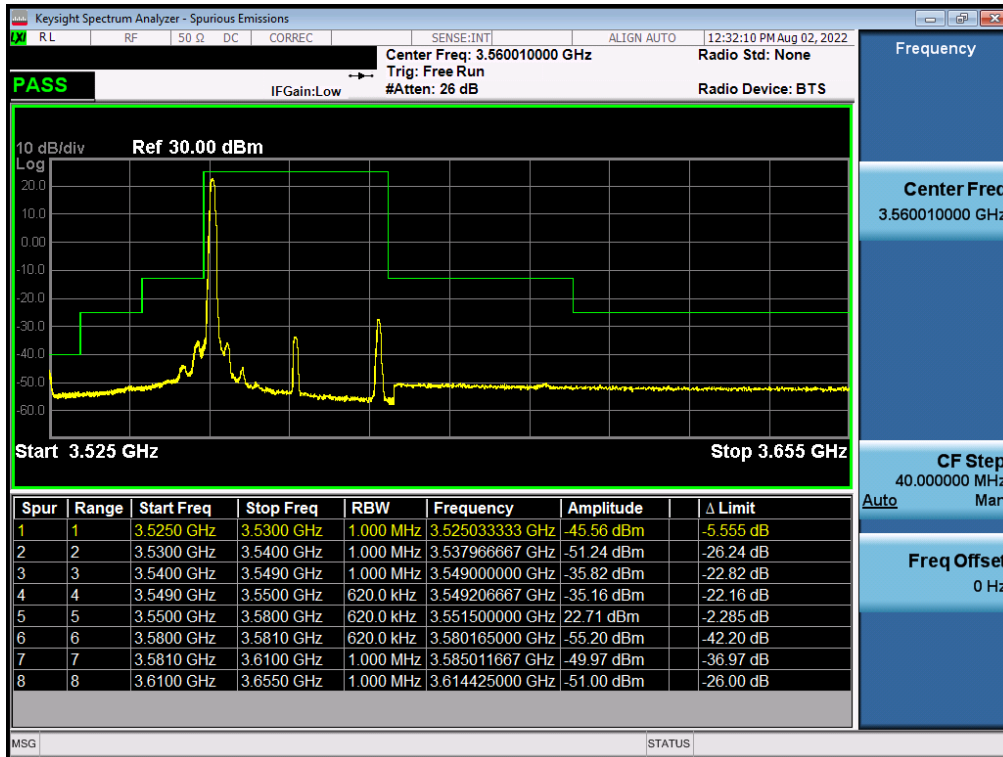


Plot 7-39. Channel Edge Plot (NR Band n48 - 30MHz QPSK - Low Channel)

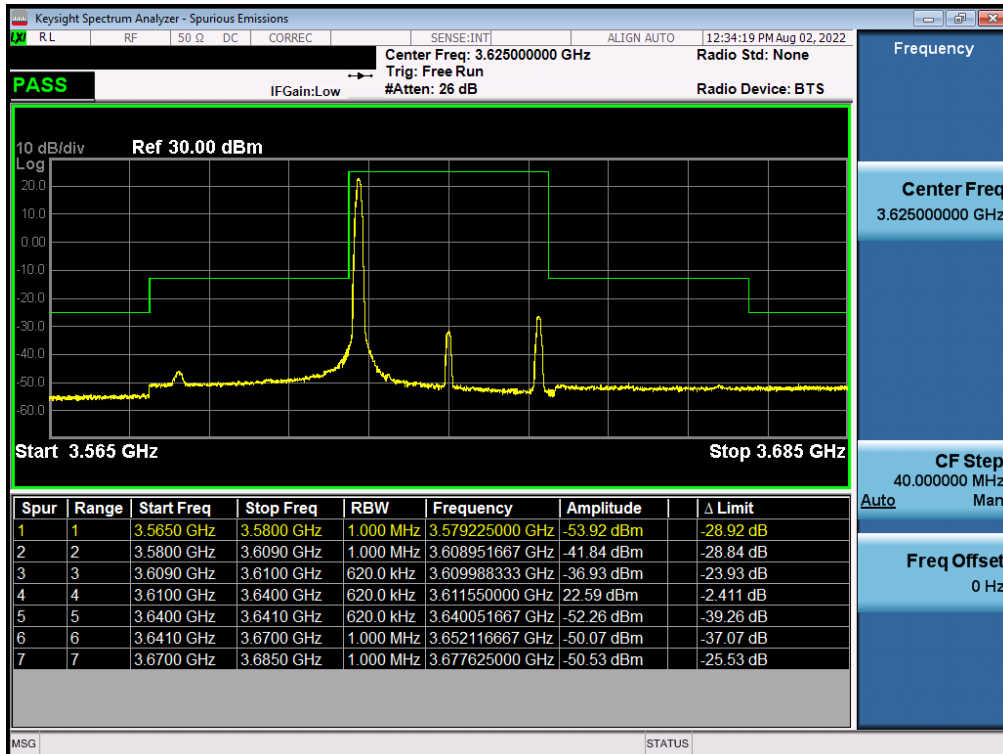


Plot 7-40. Channel Edge Plot (NR Band n48 - 30MHz QPSK - Mid Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 37 of 69

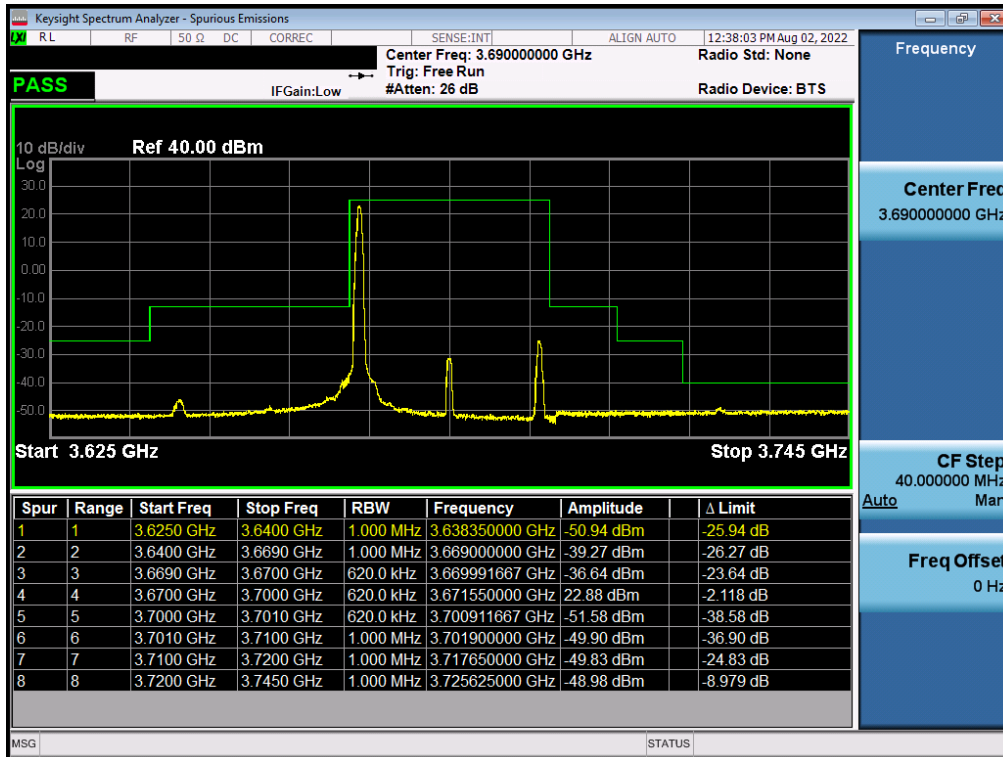


Plot 7-41. Channel Edge Plot (NR Band n48 - 30MHz QPSK - High Channel)

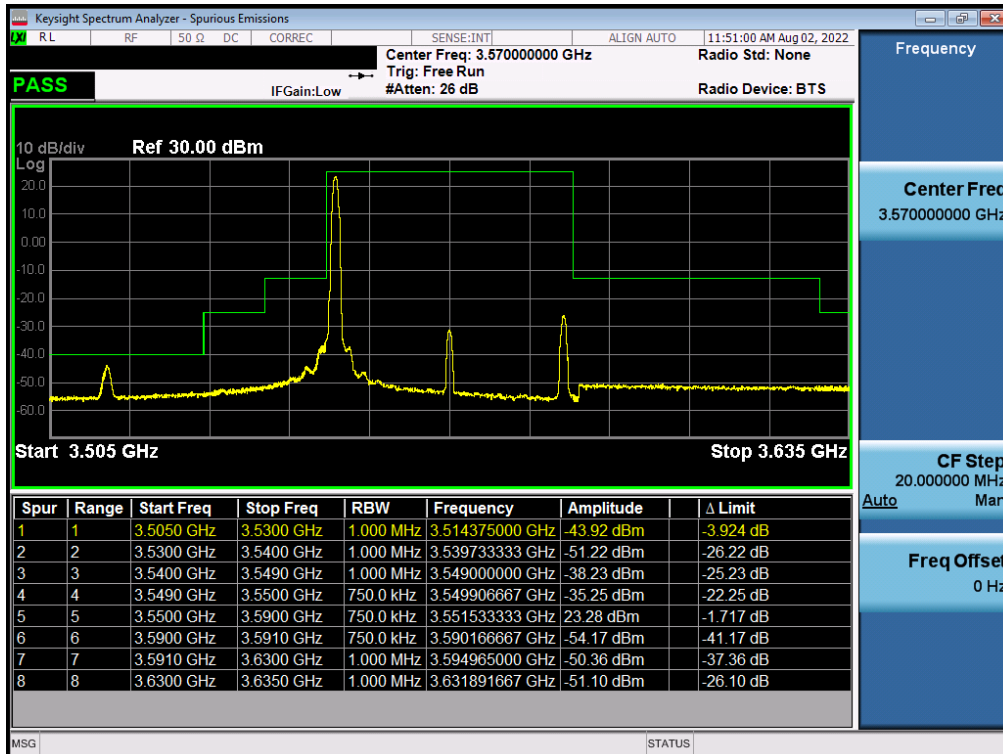


Plot 7-42. Channel Edge Plot (NR Band n48 - 40MHz QPSK - Low Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 38 of 69

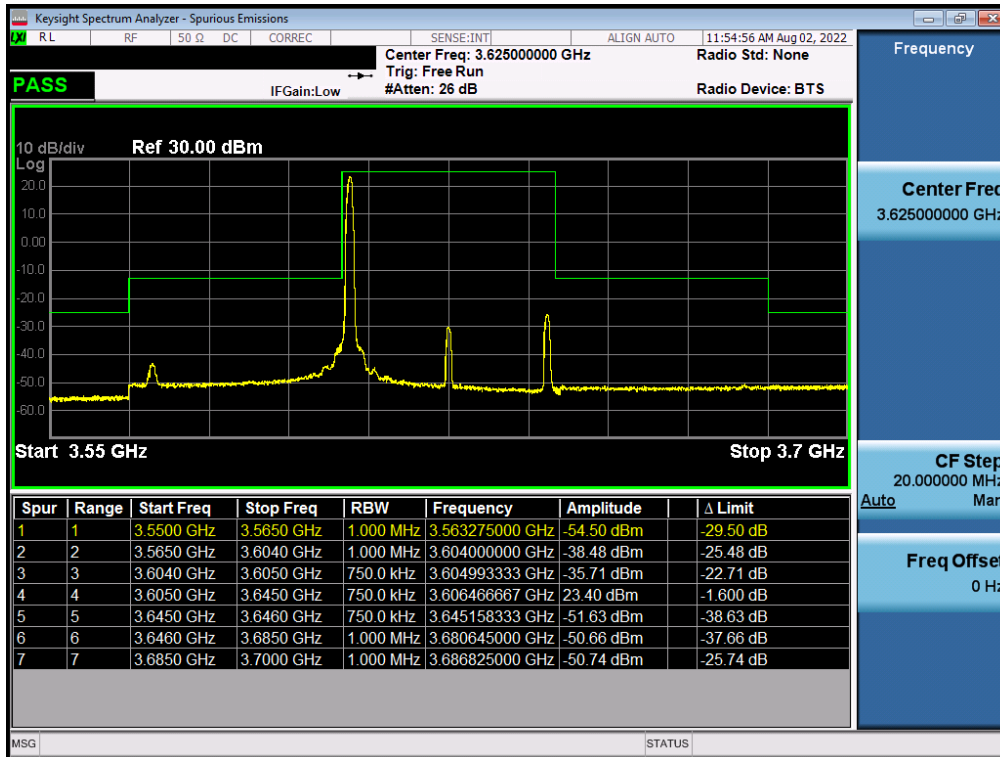

Plot 7-43. Channel Edge Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

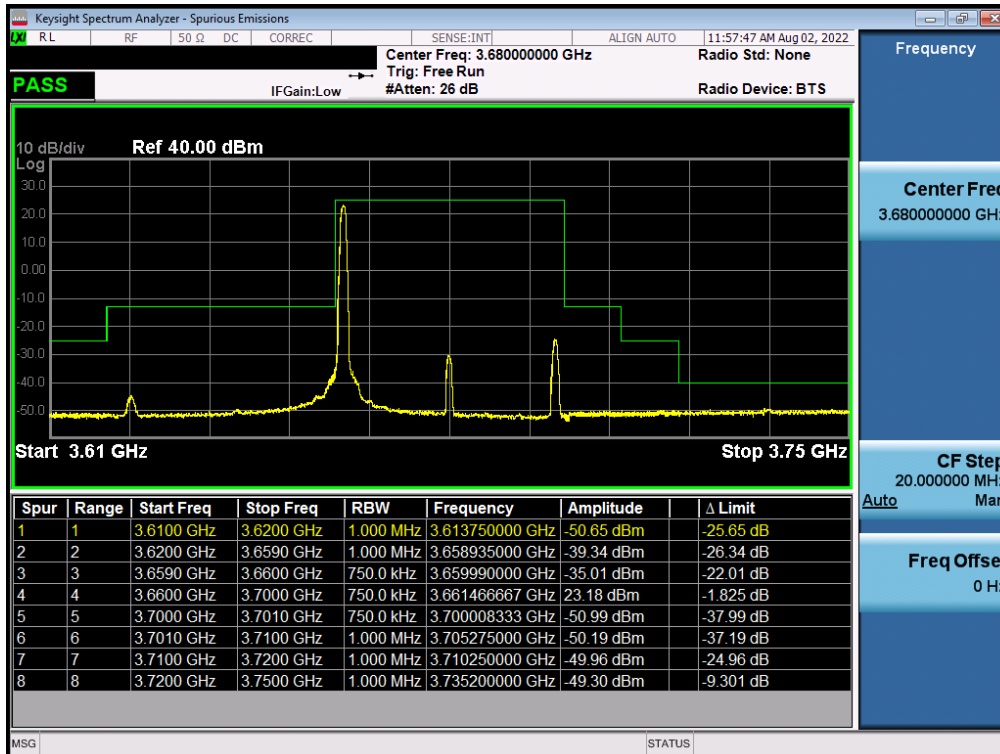

Plot 7-44. Channel Edge Plot (NR Band n48 - 40MHz QPSK - High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 39 of 69

7.5 Peak-Average Ratio

§96.41(g):

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

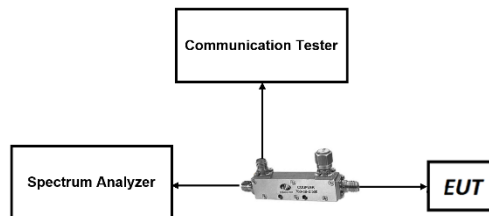



Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None.


FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 40 of 69

V2.1 11/9/2021

NR Band 48

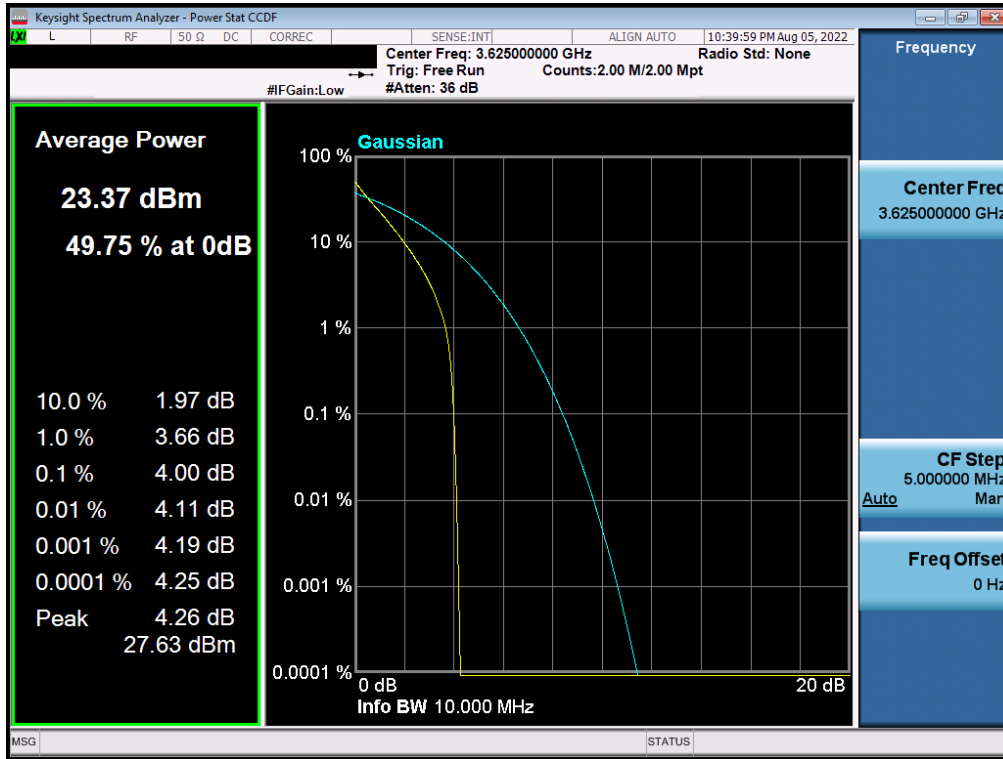


Plot 7-45. PAR Plot (NR Band n48 - 10MHz $\pi/2$ BPSK)

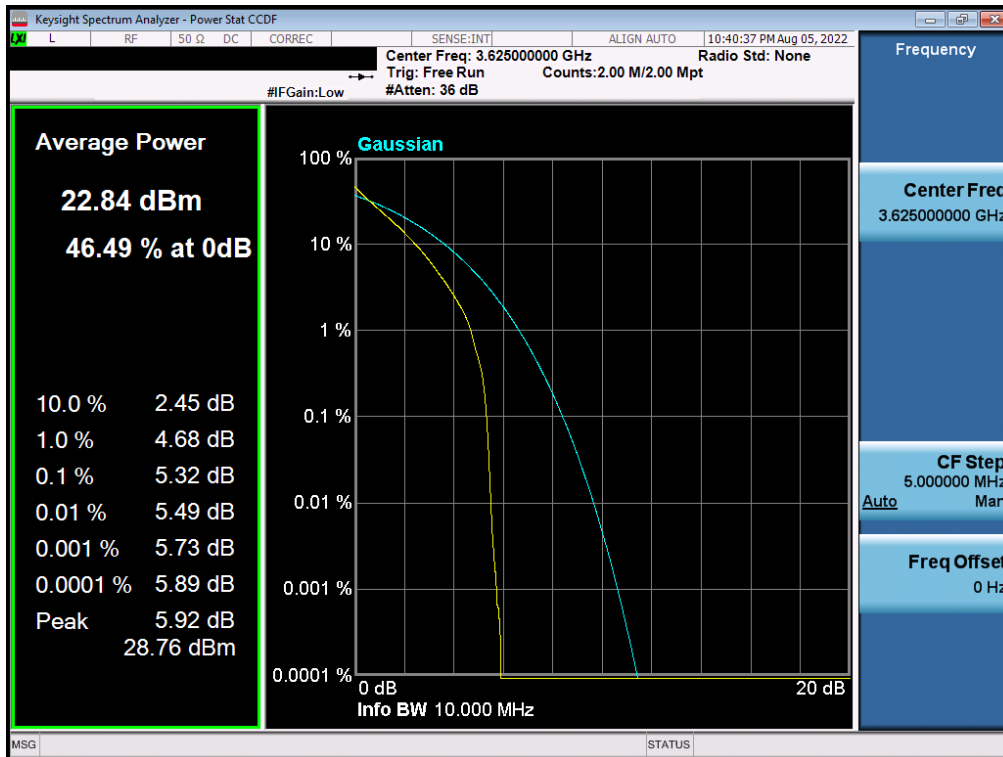


Plot 7-46. PAR Plot (NR Band n48 - 10MHz QPSK)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 41 of 69

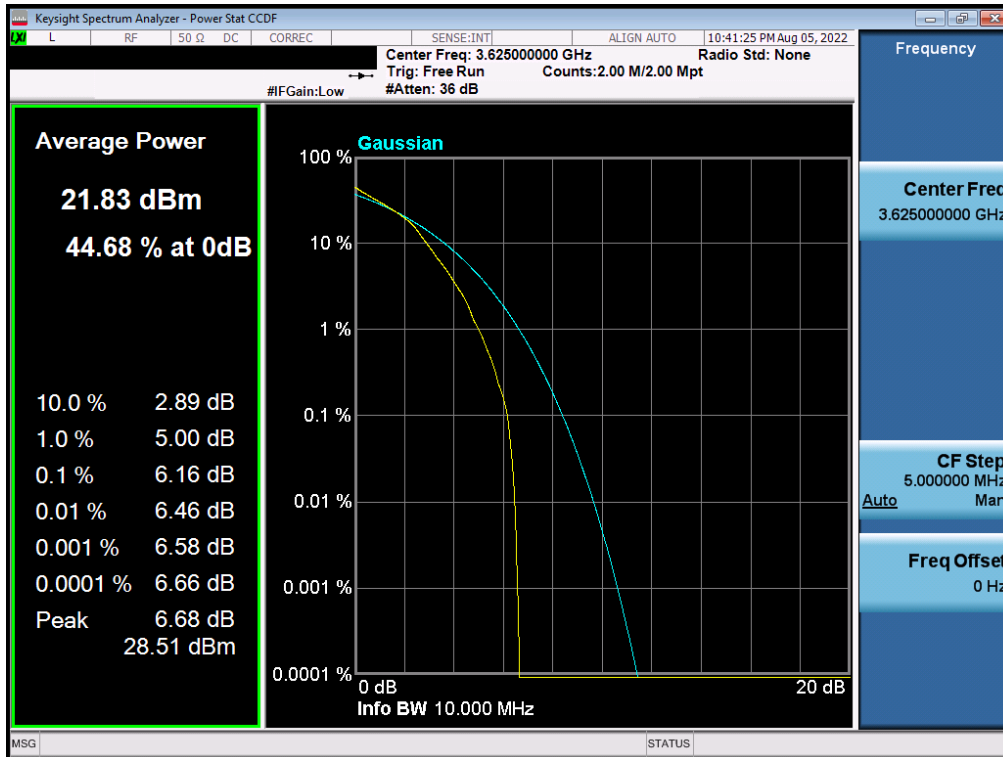


Plot 7-47. PAR Plot (NR Band n48 - 10MHz 16-QAM)

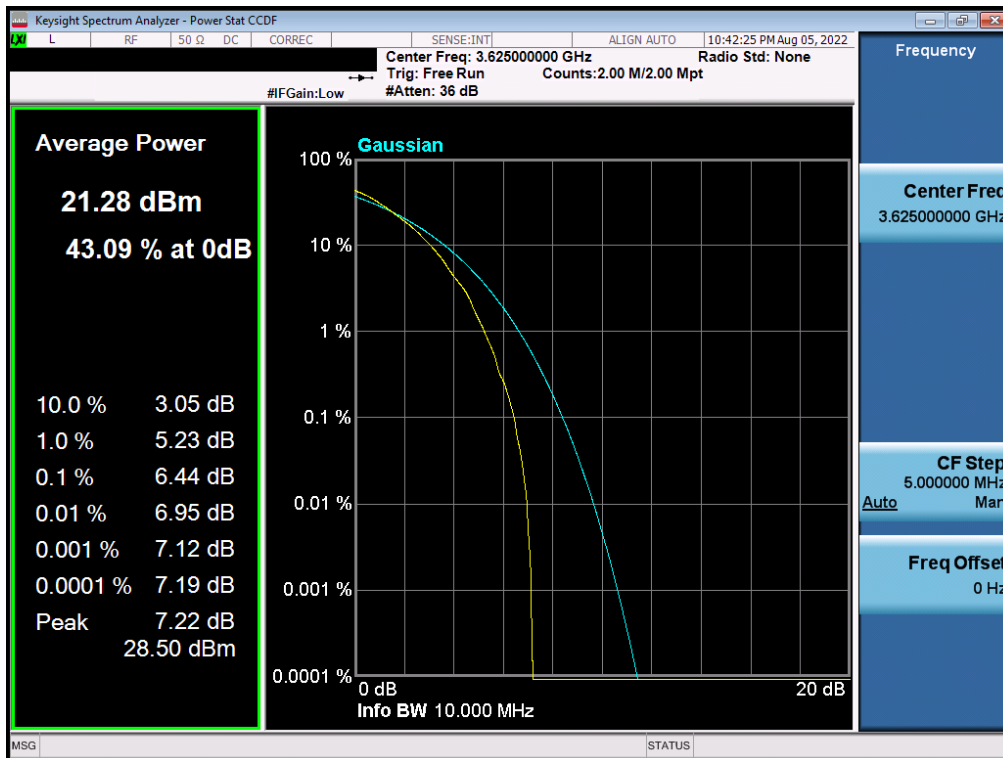


Plot 7-48. PAR Plot (NR Band n48 - 10MHz 64-QAM)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 42 of 69

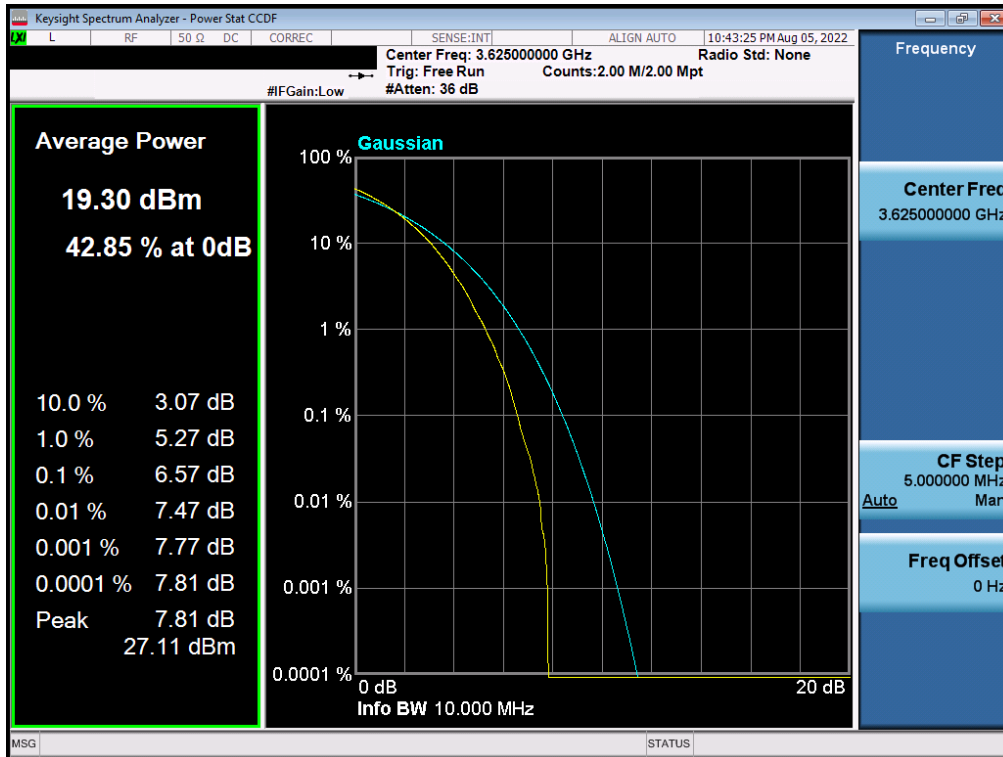


Plot 7-49. PAR Plot (NR Band n48 - 10MHz 256-QAM)

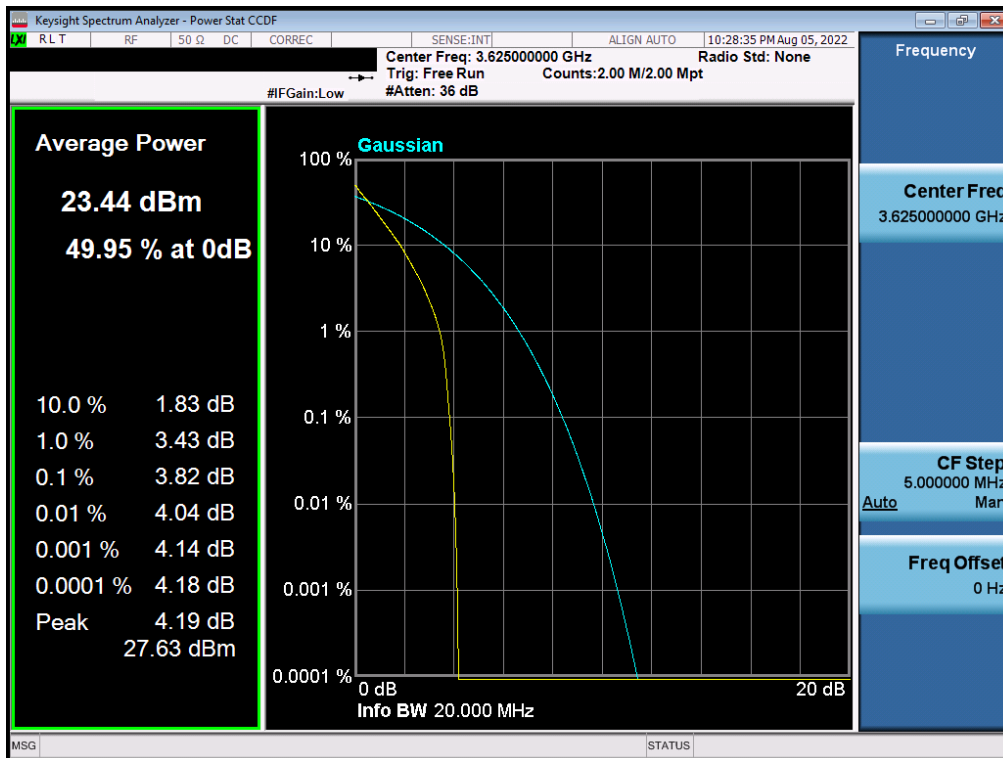


Plot 7-50. PAR Plot (NR Band n48 - 20MHz $\pi/2$ BPSK)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 43 of 69

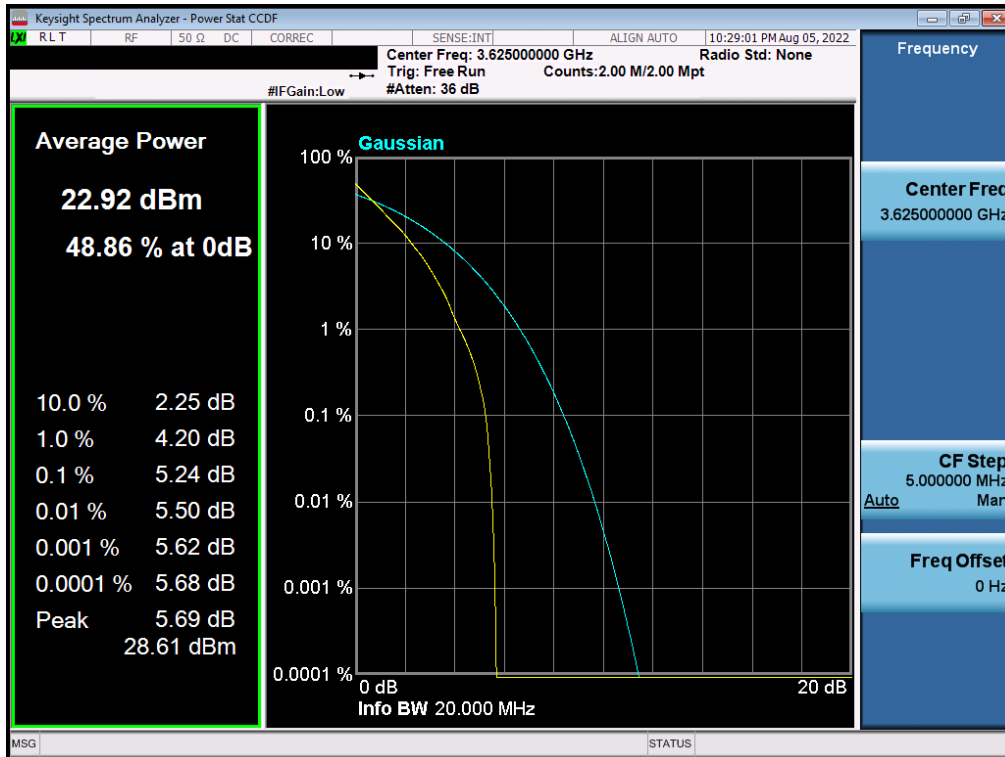


Plot 7-51. PAR Plot (NR Band n48 - 20MHz QPSK)

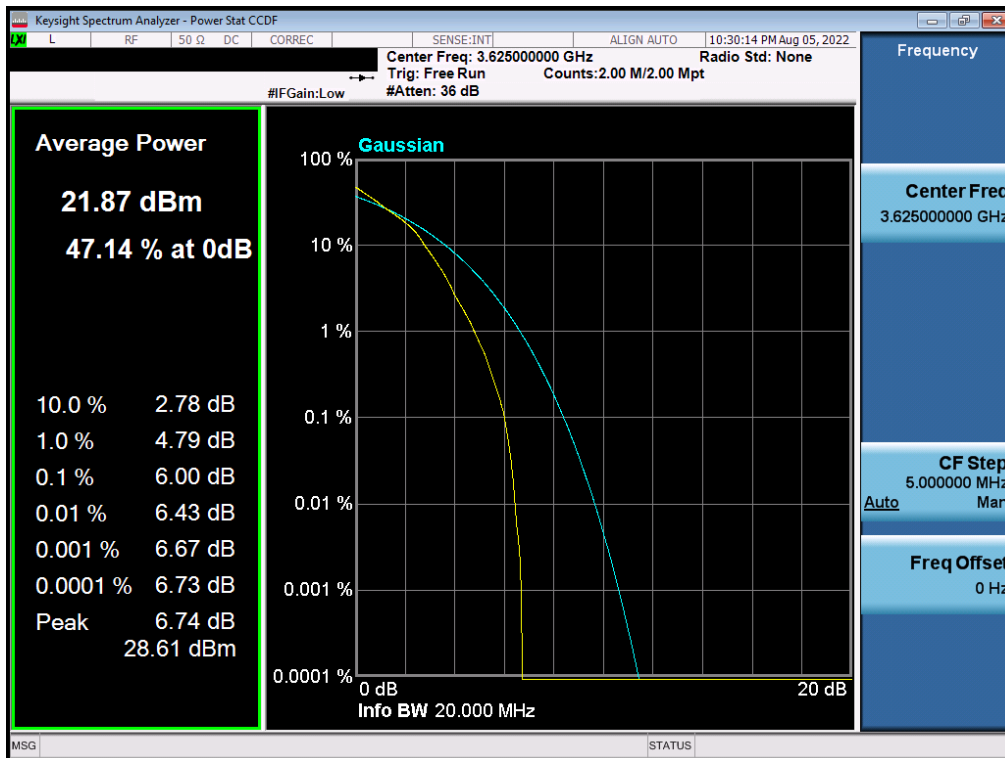


Plot 7-52. PAR Plot (NR Band n48 - 20MHz 16-QAM)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 44 of 69

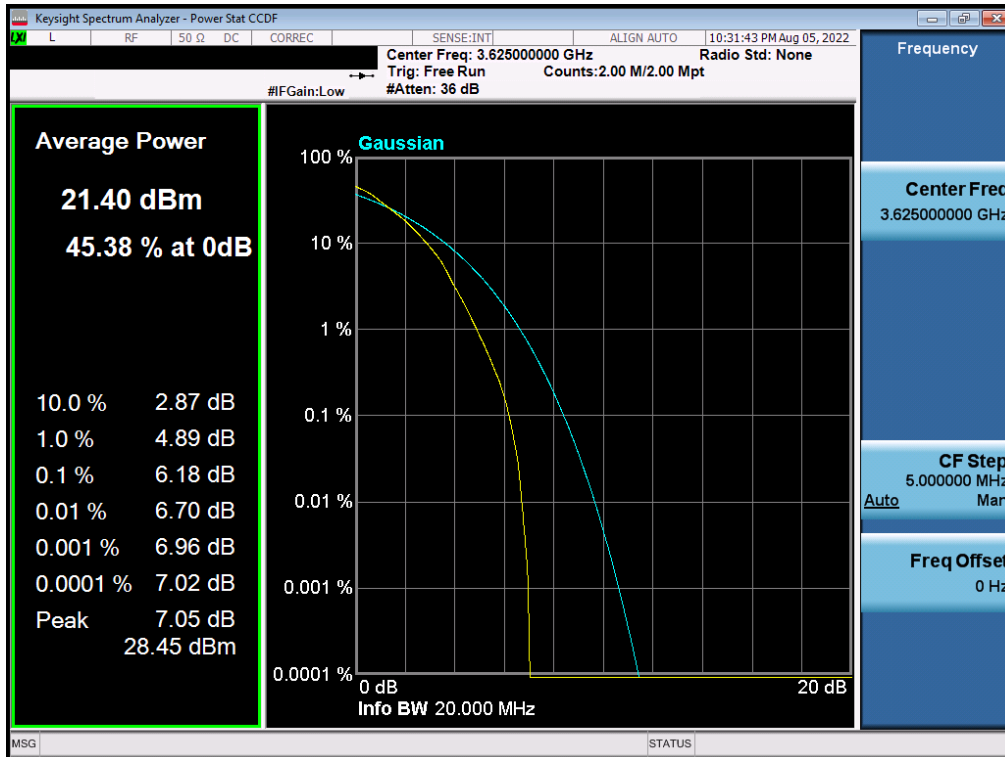


Plot 7-53. PAR Plot (NR Band n48 - 20MHz 64-QAM)

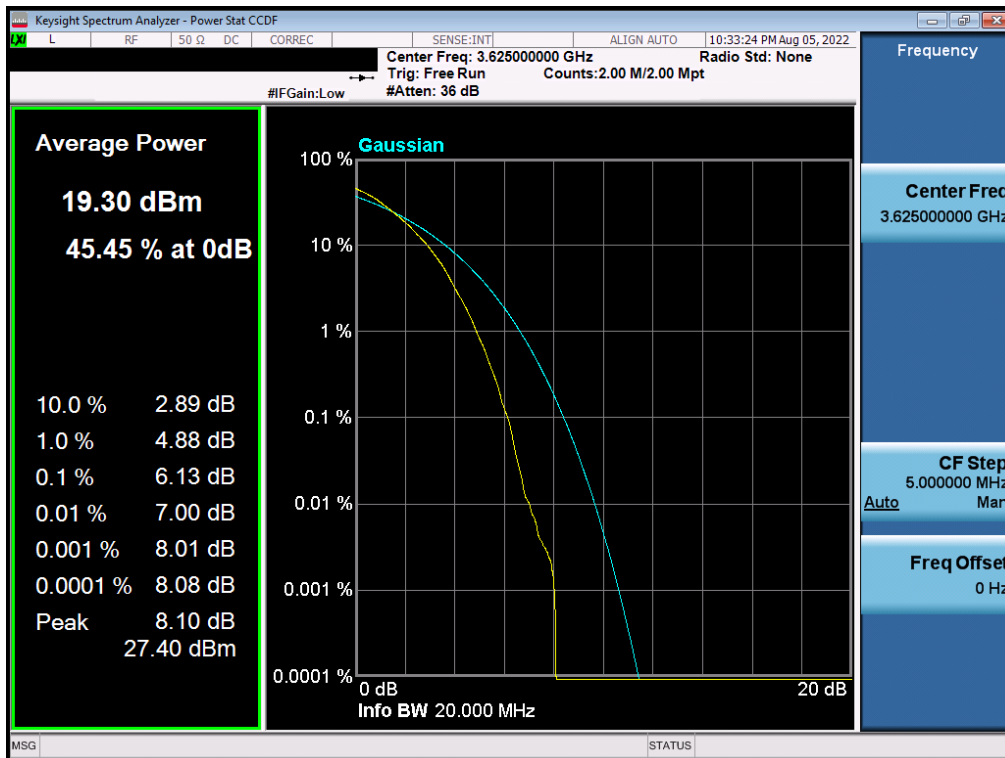


Plot 7-54. PAR Plot (NR Band n48 - 20MHz 256-QAM)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 45 of 69

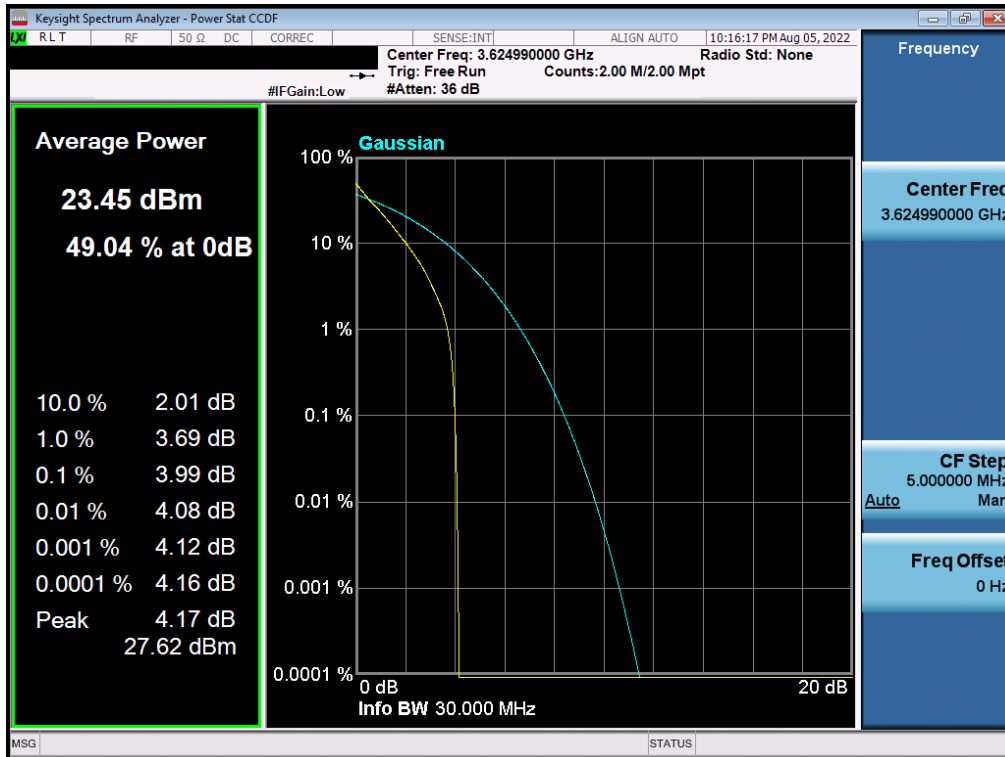


Plot 7-55. PAR Plot (NR Band n48 - 30MHz $\pi/2$ BPSK)

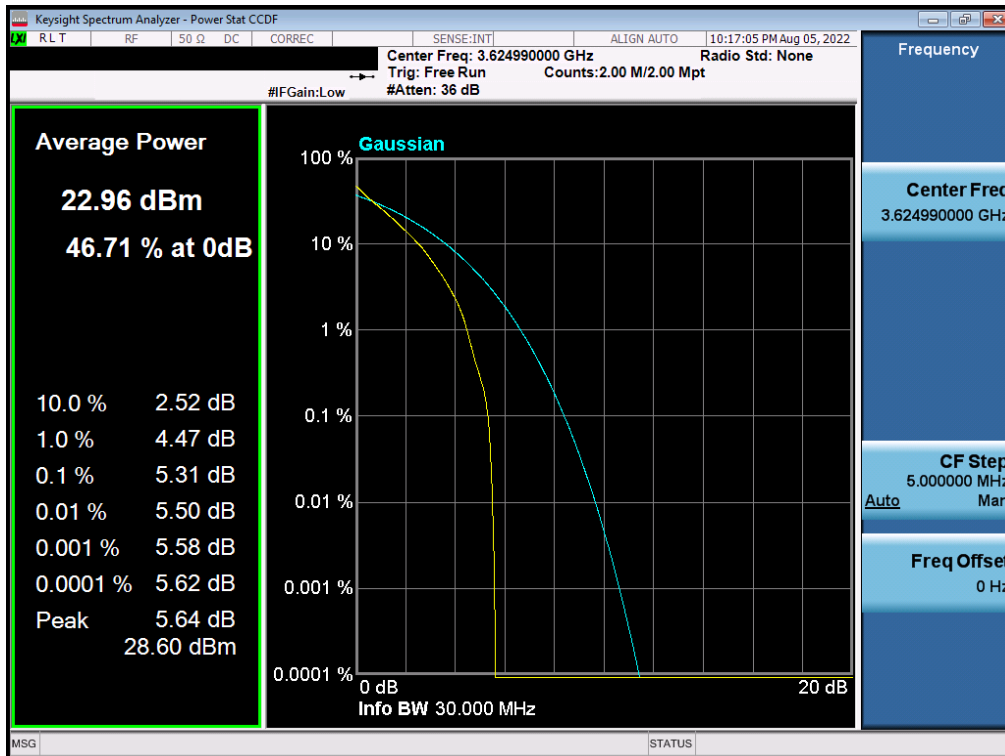


Plot 7-56. PAR Plot (NR Band n48 - 30MHz QPSK)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 46 of 69

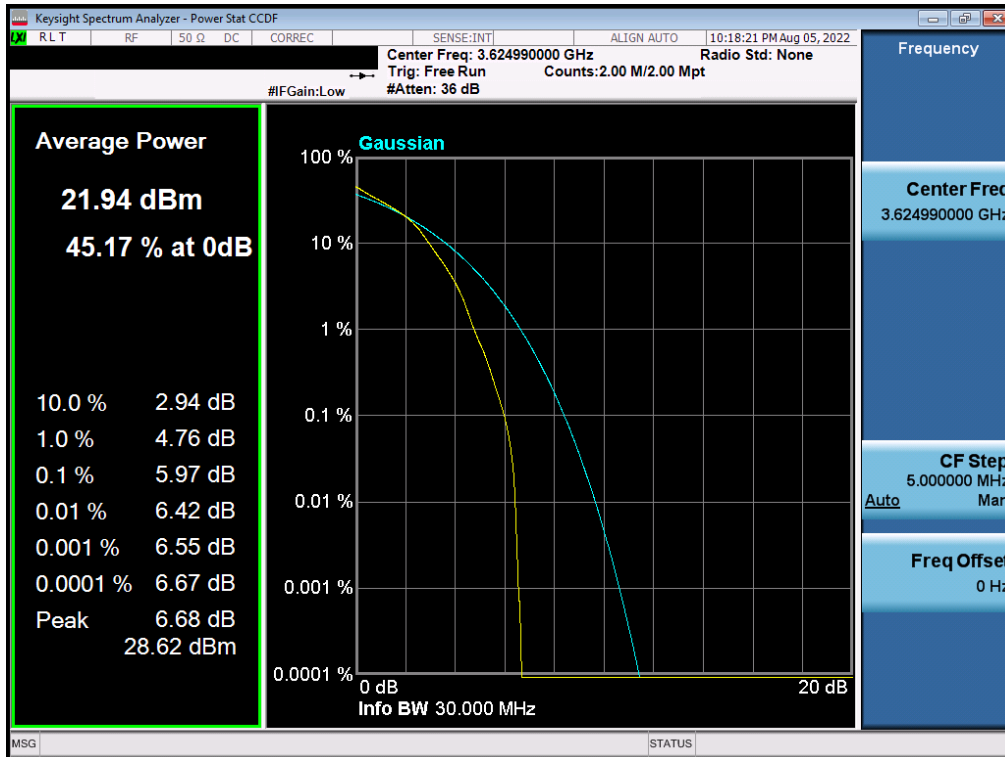


Plot 7-57. PAR Plot (NR Band n48 - 30MHz 16-QAM)

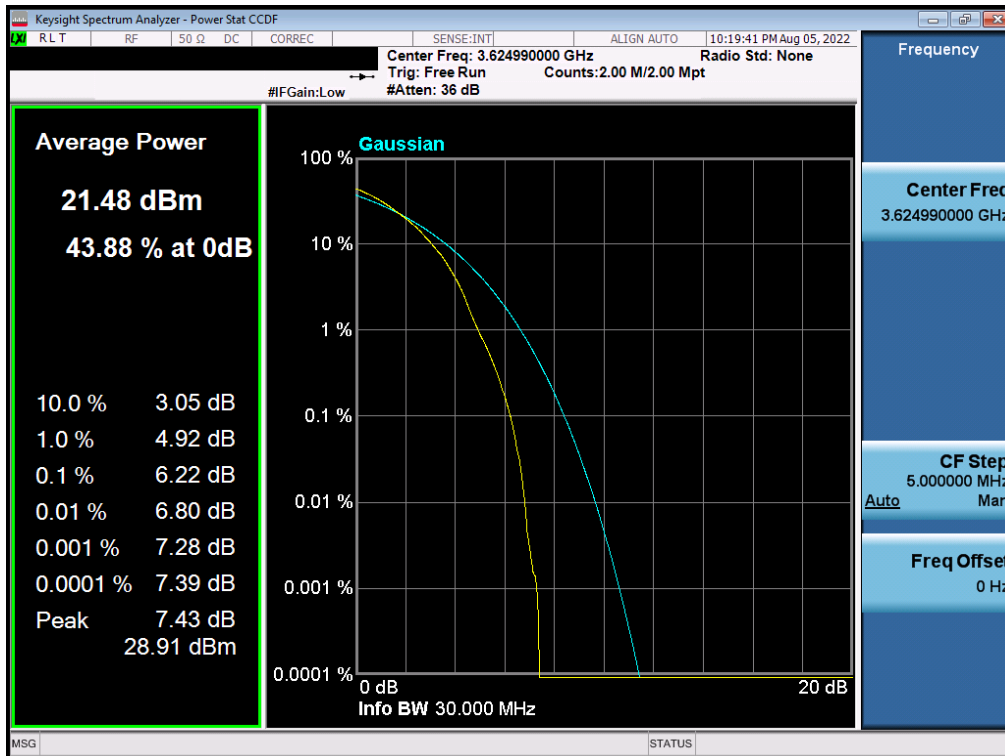


Plot 7-58. PAR Plot (NR Band n48 - 30MHz 64-QAM)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 47 of 69

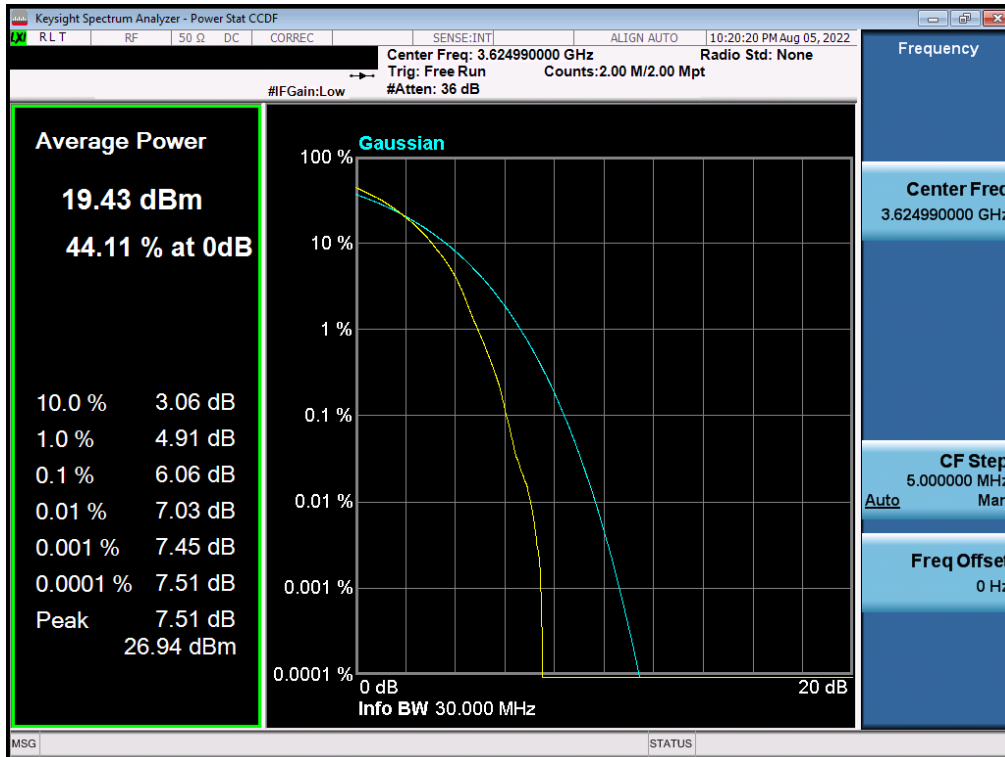


Plot 7-59. PAR Plot (NR Band n48 - 30MHz 256-QAM)

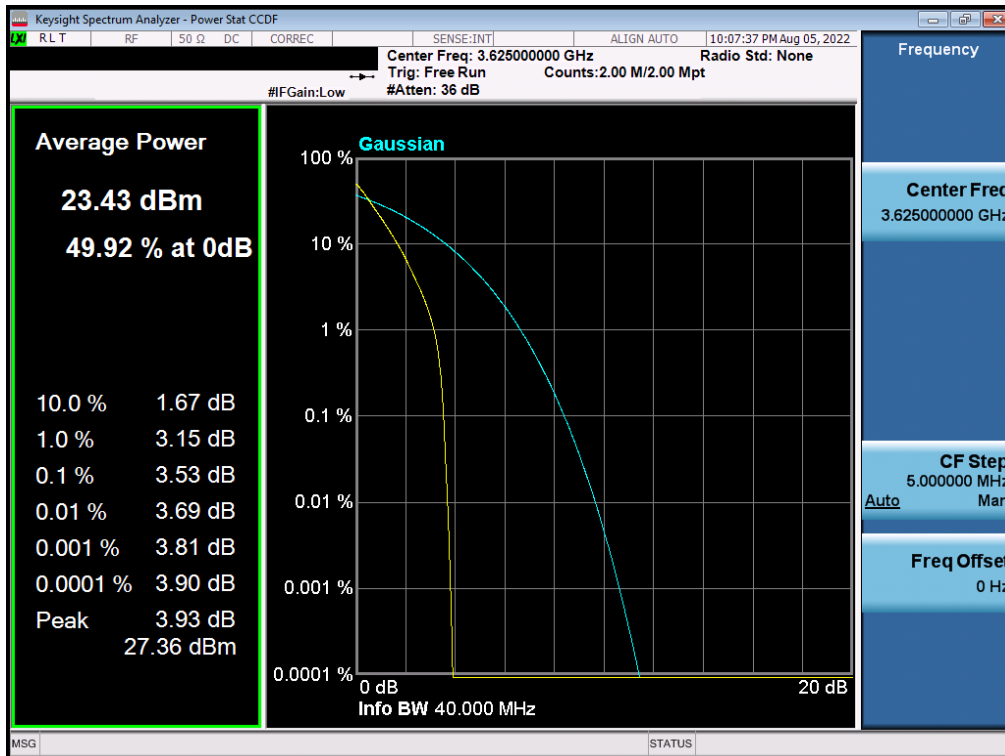


Plot 7-60. PAR Plot (NR Band n48 - 40MHz $\pi/2$ BPSK)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 48 of 69


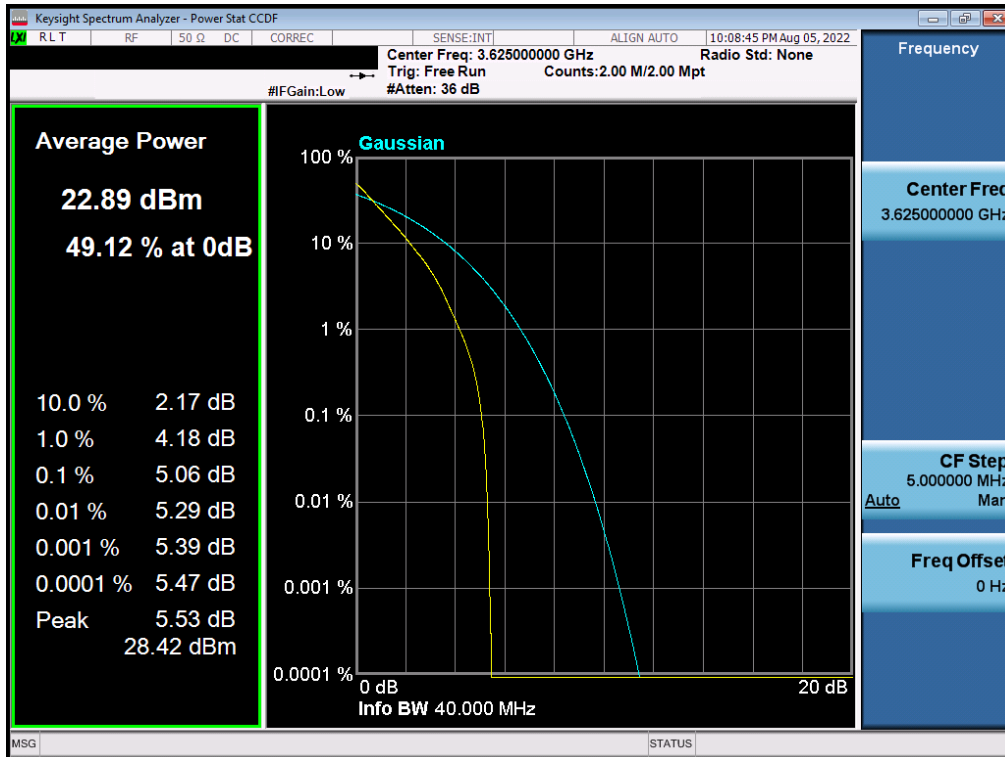


Plot 7-61. PAR Plot (NR Band n48 - 40MHz QPSK)

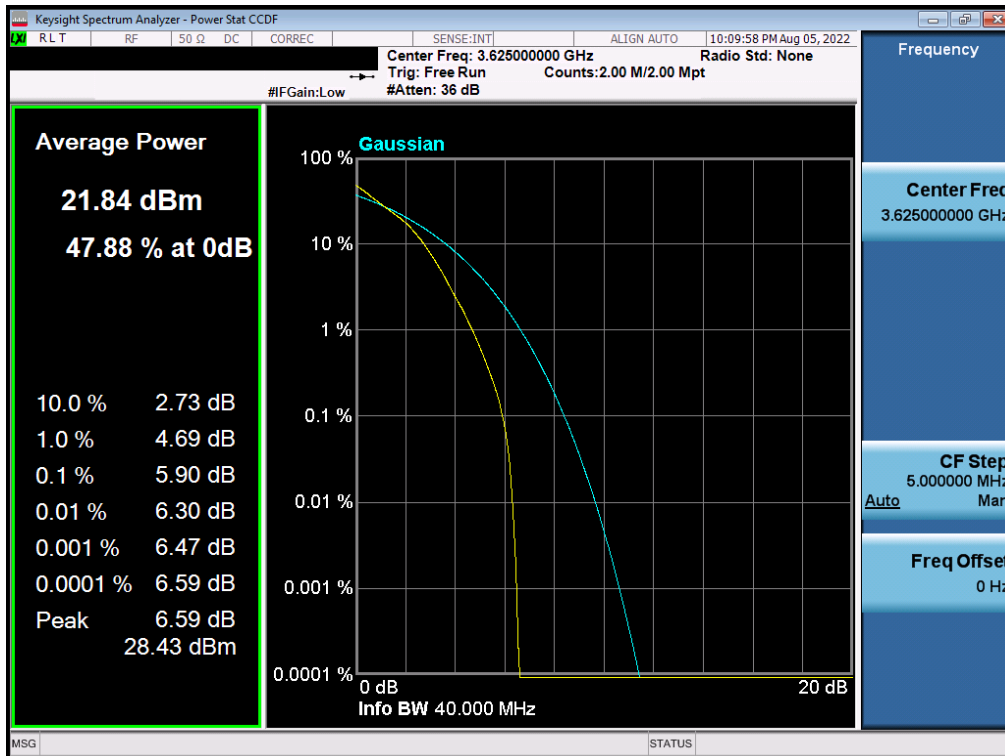

Plot 7-62. PAR Plot (NR Band n48 - 40MHz 16-QAM)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 49 of 69

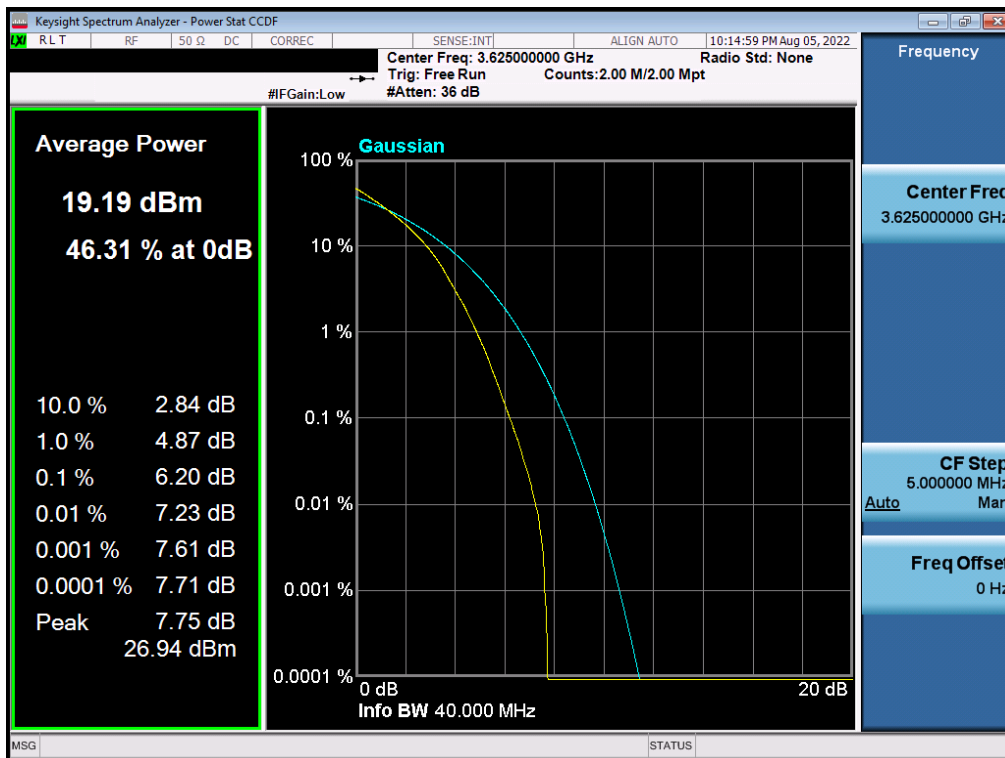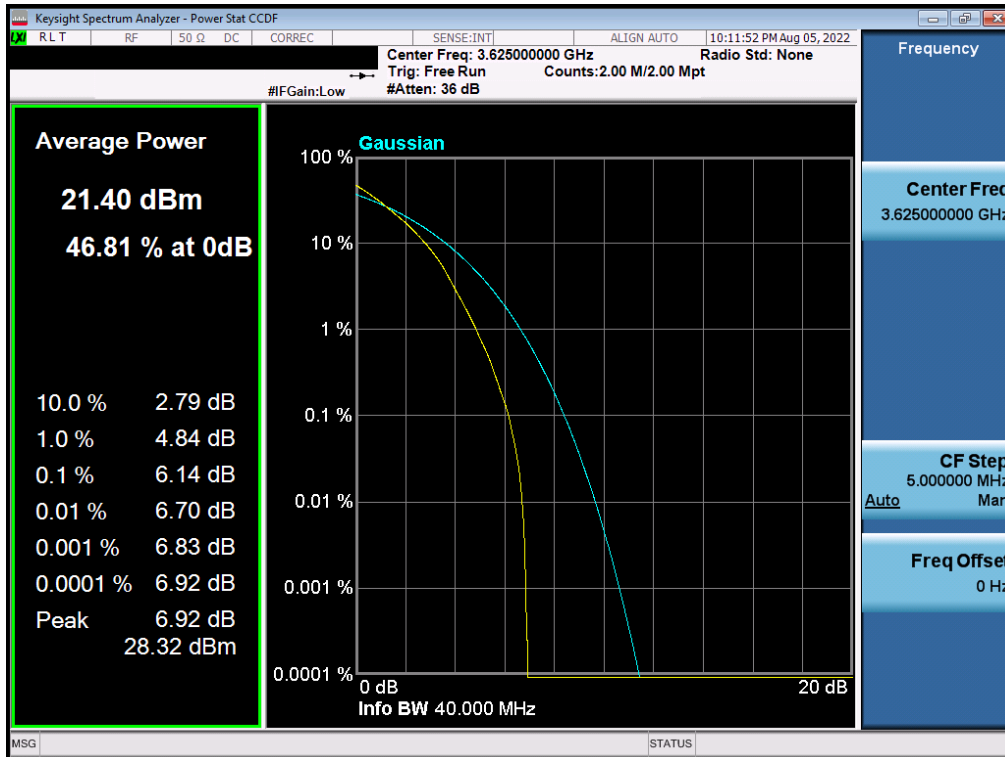

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 50 of 69

7.6 Radiated Power (EIRP)

§96.41(b)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015

Test Settings

The relevant equation for determining the EIRP from the conducted RF output power measured is:

$$\text{EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 7-5. EIRP Measurement Setup

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 51 of 69

V2.1 11/9/2021

Test Notes


- 1) The worst case emissions are reported with the modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
- 4) The worst case EIRP shown in this section is found with NR operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for NR Band n48 (i.e. 10, 20, 30, 40MHz).

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 52 of 69

Antenna 3 – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	0.00	1 / 12	21.91	21.91	0.155	23.00	-1.09
		3625.0	0.00	1 / 23	22.00	22.00	0.158	23.00	-1.00
		3695.0	0.00	1 / 23	21.86	21.86	0.153	23.00	-1.14
	QPSK	3555.0	0.00	1 / 12	21.95	21.95	0.157	23.00	-1.05
		3625.0	0.00	1 / 12	21.96	21.96	0.157	23.00	-1.04
		3695.0	0.00	1 / 23	21.95	21.95	0.157	23.00	-1.05
	16-QAM	3555.0	0.00	1 / 12	21.02	21.02	0.126	23.00	-1.98
	64-QAM	3555.0	0.00	1 / 1	20.01	20.01	0.100	23.00	-2.99
256-QAM	3555.0	0.00	1 / 1	17.12	17.12	0.052	23.00	-5.88	
20 MHz	π/2 BPSK	3560.0	0.00	1 / 25	21.93	21.93	0.156	23.00	-1.07
		3625.0	0.00	1 / 49	22.00	22.00	0.158	23.00	-1.00
		3690.0	0.00	1 / 49	21.79	21.79	0.151	23.00	-1.21
	QPSK	3560.0	0.00	1 / 25	22.00	22.00	0.158	23.00	-1.00
		3625.0	0.00	1 / 25	21.96	21.96	0.157	23.00	-1.04
		3690.0	0.00	1 / 1	21.92	21.92	0.156	23.00	-1.08
	16-QAM	3690.0	0.00	1 / 25	21.00	21.00	0.126	23.00	-2.00
	64-QAM	3625.0	0.00	1 / 49	20.00	20.00	0.100	23.00	-3.00
256-QAM	3690.0	0.00	1 / 25	17.07	17.07	0.051	23.00	-5.93	
30 MHz	π/2 BPSK	3565.0	0.00	1 / 75	22.00	22.00	0.158	23.00	-1.00
		3625.0	0.00	1 / 39	21.91	21.91	0.155	23.00	-1.09
		3685.0	0.00	1 / 1	21.88	21.88	0.154	23.00	-1.12
	QPSK	3565.0	0.00	1 / 1	21.92	21.92	0.156	23.00	-1.08
		3625.0	0.00	1 / 1	21.91	21.91	0.155	23.00	-1.09
		3685.0	0.00	1 / 39	21.96	21.96	0.157	23.00	-1.04
	16-QAM	3685.0	0.00	1 / 75	21.05	21.05	0.127	23.00	-1.95
	64-QAM	3565.0	0.00	1 / 75	20.02	20.02	0.100	23.00	-2.98
256-QAM	3565.0	0.00	1 / 75	17.12	17.12	0.052	23.00	-5.88	
40 MHz	π/2 BPSK	3570.0	0.00	1 / 53	21.90	21.90	0.155	23.00	-1.10
		3625.0	0.00	1 / 53	21.89	21.89	0.155	23.00	-1.11
		3680.0	0.00	1 / 53	21.88	21.88	0.154	23.00	-1.12
	QPSK	3570.0	0.00	1 / 53	22.00	22.00	0.158	23.00	-1.00
		3625.0	0.00	1 / 104	21.92	21.92	0.156	23.00	-1.08
		3680.0	0.00	1 / 1	21.79	21.79	0.151	23.00	-1.21
	16-QAM	3625.0	0.00	1 / 1	20.98	20.98	0.125	23.00	-2.02
	64-QAM	3570.0	0.00	1 / 1	20.00	20.00	0.100	23.00	-3.00
256-QAM	3625.0	0.00	1 / 1	17.05	17.05	0.051	23.00	-5.95	


Table 7-2. EIRP Data (NR Band n48)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 53 of 69

Antenna 1 – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	-1.20	1 / 1	22.98	21.78	0.151	23.00	-1.22
		3625.0	-1.20	1 / 23	23.16	21.96	0.157	23.00	-1.04
		3695.0	-1.20	1 / 1	23.08	21.88	0.154	23.00	-1.12
	QPSK	3555.0	-1.20	1 / 1	23.03	21.83	0.152	23.00	-1.17
		3625.0	-1.20	1 / 12	23.13	21.93	0.156	23.00	-1.07
		3695.0	-1.20	1 / 23	23.20	22.00	0.158	23.00	-1.00
	16-QAM	3555.0	-1.20	1 / 1	22.18	20.98	0.125	23.00	-2.02
64-QAM	3555.0	-1.20	1 / 12	21.18	19.98	0.100	23.00	-3.02	
256-QAM	3695.0	-1.20	1 / 12	18.30	17.10	0.051	23.00	-5.90	
20 MHz	π/2 BPSK	3560.0	-1.20	1 / 1	23.18	21.98	0.158	23.00	-1.02
		3625.0	-1.20	1 / 49	23.15	21.95	0.157	23.00	-1.05
		3690.0	-1.20	1 / 25	23.19	21.99	0.158	23.00	-1.01
	QPSK	3560.0	-1.20	1 / 49	23.06	21.86	0.153	23.00	-1.14
		3625.0	-1.20	1 / 1	23.20	22.00	0.158	23.00	-1.00
		3690.0	-1.20	1 / 25	22.95	21.75	0.150	23.00	-1.25
	16-QAM	3560.0	-1.20	1 / 25	22.18	20.98	0.125	23.00	-2.02
64-QAM	3560.0	-1.20	1 / 25	21.12	19.92	0.098	23.00	-3.08	
256-QAM	3625.0	-1.20	1 / 25	18.21	17.01	0.050	23.00	-5.99	
30 MHz	π/2 BPSK	3565.0	-1.20	1 / 1	23.06	21.86	0.153	23.00	-1.14
		3625.0	-1.20	1 / 39	23.20	22.00	0.158	23.00	-1.00
		3685.0	-1.20	1 / 1	23.19	21.99	0.158	23.00	-1.01
	QPSK	3565.0	-1.20	1 / 75	23.16	21.96	0.157	23.00	-1.04
		3625.0	-1.20	1 / 39	23.05	21.85	0.153	23.00	-1.15
		3685.0	-1.20	1 / 39	23.14	21.94	0.156	23.00	-1.06
	16-QAM	3565.0	-1.20	1 / 75	22.17	20.97	0.125	23.00	-2.03
64-QAM	3685.0	-1.20	1 / 39	21.17	19.97	0.099	23.00	-3.03	
256-QAM	3625.0	-1.20	1 / 75	18.24	17.04	0.051	23.00	-5.96	
40 MHz	π/2 BPSK	3570.0	-1.20	1 / 104	23.03	21.83	0.152	23.00	-1.17
		3625.0	-1.20	1 / 1	22.87	21.67	0.147	23.00	-1.33
		3680.0	-1.20	1 / 53	22.90	21.70	0.148	23.00	-1.30
	QPSK	3570.0	-1.20	1 / 1	22.85	21.65	0.146	23.00	-1.35
		3625.0	-1.20	1 / 1	23.20	22.00	0.158	23.00	-1.00
		3680.0	-1.20	1 / 53	23.14	21.94	0.156	23.00	-1.06
	16-QAM	3570.0	-1.20	1 / 104	22.21	21.01	0.126	23.00	-1.99
64-QAM	3625.0	-1.20	1 / 1	21.22	20.02	0.100	23.00	-2.98	
256-QAM	3680.0	-1.20	1 / 1	18.30	17.10	0.051	23.00	-5.90	


Table 7-3. EIRP Data (NR Band n48)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 54 of 69

Antenna 4b – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	-1.60	1 / 23	23.60	22.00	0.158	23.00	-1.00
		3625.0	-1.60	1 / 23	23.55	21.95	0.157	23.00	-1.05
		3695.0	-1.60	1 / 23	23.50	21.90	0.155	23.00	-1.10
	QPSK	3555.0	-1.60	1 / 1	23.55	21.95	0.157	23.00	-1.05
		3625.0	-1.60	1 / 1	23.44	21.84	0.153	23.00	-1.16
		3695.0	-1.60	1 / 23	23.39	21.79	0.151	23.00	-1.21
	16-QAM	3695.0	-1.60	1 / 12	22.55	20.95	0.124	23.00	-2.05
	64-QAM	3555.0	-1.60	1 / 1	21.52	19.92	0.098	23.00	-3.08
256-QAM	3695.0	-1.60	1 / 12	18.70	17.10	0.051	23.00	-5.90	
20 MHz	π/2 BPSK	3560.0	-1.60	1 / 49	23.55	21.95	0.157	23.00	-1.05
		3625.0	-1.60	1 / 25	23.59	21.99	0.158	23.00	-1.01
		3690.0	-1.60	1 / 25	23.42	21.82	0.152	23.00	-1.18
	QPSK	3560.0	-1.60	1 / 49	23.60	22.00	0.158	23.00	-1.00
		3625.0	-1.60	1 / 1	23.60	22.00	0.158	23.00	-1.00
		3690.0	-1.60	1 / 1	23.58	21.98	0.158	23.00	-1.02
	16-QAM	3560.0	-1.60	1 / 25	22.55	20.95	0.124	23.00	-2.05
	64-QAM	3625.0	-1.60	1 / 49	21.58	19.98	0.100	23.00	-3.02
256-QAM	3690.0	-1.60	1 / 49	18.68	17.08	0.051	23.00	-5.92	
30 MHz	π/2 BPSK	3565.0	-1.60	1 / 39	23.49	21.89	0.155	23.00	-1.11
		3625.0	-1.60	1 / 39	23.60	22.00	0.158	23.00	-1.00
		3685.0	-1.60	1 / 39	23.43	21.83	0.152	23.00	-1.17
	QPSK	3565.0	-1.60	1 / 39	23.46	21.86	0.153	23.00	-1.14
		3625.0	-1.60	1 / 39	23.33	21.73	0.149	23.00	-1.27
		3685.0	-1.60	1 / 1	23.52	21.92	0.156	23.00	-1.08
	16-QAM	3685.0	-1.60	1 / 39	22.57	20.97	0.125	23.00	-2.03
	64-QAM	3685.0	-1.60	1 / 1	21.62	20.02	0.100	23.00	-2.98
256-QAM	3565.0	-1.60	1 / 1	18.75	17.15	0.052	23.00	-5.85	
40 MHz	π/2 BPSK	3570.0	-1.60	1 / 1	23.58	21.98	0.158	23.00	-1.02
		3625.0	-1.60	1 / 53	23.60	22.00	0.158	23.00	-1.00
		3680.0	-1.60	1 / 104	23.57	21.97	0.157	23.00	-1.03
	QPSK	3570.0	-1.60	1 / 53	23.59	21.99	0.158	23.00	-1.01
		3625.0	-1.60	1 / 104	23.53	21.93	0.156	23.00	-1.07
		3680.0	-1.60	1 / 104	23.51	21.91	0.155	23.00	-1.09
	16-QAM	3570.0	-1.60	1 / 53	22.49	20.89	0.123	23.00	-2.11
	64-QAM	3570.0	-1.60	1 / 1	21.59	19.99	0.100	23.00	-3.01
256-QAM	3680.0	-1.60	1 / 1	18.69	17.09	0.051	23.00	-5.91	


Table 7-4. EIRP Data (NR Band n48)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 55 of 69

Antenna 2a – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	1.80	1 / 12	20.20	22.00	0.158	23.00	-1.00
		3625.0	1.80	1 / 23	20.10	21.90	0.155	23.00	-1.10
		3695.0	1.80	1 / 12	20.14	21.94	0.156	23.00	-1.06
	QPSK	3555.0	1.80	1 / 23	20.07	21.87	0.154	23.00	-1.13
		3625.0	1.80	1 / 23	20.19	21.99	0.158	23.00	-1.01
		3695.0	1.80	1 / 12	20.14	21.94	0.156	23.00	-1.06
	16-QAM	3625.0	1.80	1 / 1	19.20	21.00	0.126	23.00	-2.00
64-QAM	3555.0	1.80	1 / 1	18.18	19.98	0.100	23.00	-3.02	
256-QAM	3625.0	1.80	1 / 12	15.31	17.11	0.051	23.00	-5.89	
20 MHz	π/2 BPSK	3560.0	1.80	1 / 25	19.98	21.78	0.151	23.00	-1.22
		3625.0	1.80	1 / 1	20.10	21.90	0.155	23.00	-1.10
		3690.0	1.80	1 / 49	19.78	21.58	0.144	23.00	-1.42
	QPSK	3560.0	1.80	1 / 49	19.78	21.58	0.144	23.00	-1.42
		3625.0	1.80	1 / 1	20.14	21.94	0.156	23.00	-1.06
		3690.0	1.80	1 / 25	20.20	22.00	0.158	23.00	-1.00
	16-QAM	3560.0	1.80	1 / 1	19.17	20.97	0.125	23.00	-2.03
64-QAM	3560.0	1.80	1 / 25	18.20	20.00	0.100	23.00	-3.00	
256-QAM	3625.0	1.80	1 / 1	15.31	17.11	0.051	23.00	-5.89	
30 MHz	π/2 BPSK	3565.0	1.80	1 / 39	20.20	22.00	0.158	23.00	-1.00
		3625.0	1.80	1 / 75	19.86	21.66	0.147	23.00	-1.34
		3685.0	1.80	1 / 1	20.09	21.89	0.155	23.00	-1.11
	QPSK	3565.0	1.80	1 / 39	19.92	21.72	0.149	23.00	-1.28
		3625.0	1.80	1 / 39	20.01	21.81	0.152	23.00	-1.19
		3685.0	1.80	1 / 39	20.04	21.84	0.153	23.00	-1.16
	16-QAM	3625.0	1.80	1 / 75	19.21	21.01	0.126	23.00	-1.99
64-QAM	3685.0	1.80	1 / 75	18.21	20.01	0.100	23.00	-2.99	
256-QAM	3625.0	1.80	1 / 1	15.30	17.10	0.051	23.00	-5.90	
40 MHz	π/2 BPSK	3570.0	1.80	1 / 1	20.12	21.92	0.156	23.00	-1.08
		3625.0	1.80	1 / 1	20.18	21.98	0.158	23.00	-1.02
		3680.0	1.80	1 / 1	20.13	21.93	0.156	23.00	-1.07
	QPSK	3570.0	1.80	1 / 104	20.20	22.00	0.158	23.00	-1.00
		3625.0	1.80	1 / 1	19.96	21.76	0.150	23.00	-1.24
		3680.0	1.80	1 / 104	20.20	22.00	0.158	23.00	-1.00
	16-QAM	3680.0	1.80	1 / 1	19.19	20.99	0.126	23.00	-2.01
64-QAM	3570.0	1.80	1 / 104	18.21	20.01	0.100	23.00	-2.99	
256-QAM	3625.0	1.80	1 / 53	15.27	17.07	0.051	23.00	-5.93	

Table 7-5. EIRP Data (NR Band n48)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 56 of 69



7.7 Radiated Spurious Emissions

\$2.1053 \$96.41(e)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26-2015

TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 57 of 69

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

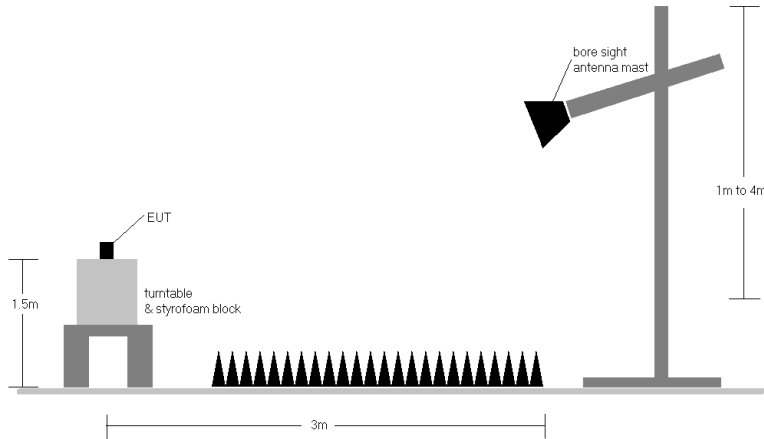



Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - a. $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b. $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
2. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below. 1RB config was found and reported as a worst case RB size.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
5. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. For NR Band n48 pre-scans 1-18GHz, the RBW is set to 1MHz and VBW to 30kHz. For final measurements above 1GHz, the RBW is set to 1MHz and VBW to 3MHz when measuring with an RMS detector and max hold trace.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 58 of 69

7.7.1 Antenna 3 Radiated Spurious Emissions Measurements

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7140.0	V	-	-	-77.07	8.93	38.86	-56.40	-40.00	-16.40
10710.0	V	-	-	-78.84	14.88	43.04	-52.22	-40.00	-12.22
14280.0	V	-	-	-76.98	15.35	45.37	-49.89	-40.00	-9.89

Table 7-6. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-77.29	8.96	38.67	-56.59	-40.00	-16.59
10875.0	V	-	-	-79.22	15.24	43.02	-52.24	-40.00	-12.24
14500.0	V	-	-	-77.63	16.01	45.38	-49.87	-40.00	-9.87

Table 7-7. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7360.0	V	-	-	-77.58	9.33	38.75	-56.51	-40.00	-16.51
11040.0	V	-	-	-79.72	15.87	43.15	-52.11	-40.00	-12.11
14720.0	V	-	-	-78.12	16.67	45.55	-49.71	-40.00	-9.71

Table 7-8. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 59 of 69

7.7.3 Antenna 1 Radiated Spurious Emissions Measurements

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7140.0	H	-	-	-77.08	8.93	38.85	-56.41	-40.00	-16.41
10710.0	H	-	-	-78.93	14.88	42.95	-52.31	-40.00	-12.31
14280.0	H	-	-	-77.90	15.35	44.45	-50.81	-40.00	-10.81

Table 7-9. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-77.31	8.96	38.65	-56.61	-40.00	-16.61
10875.0	H	-	-	-79.17	15.24	43.07	-52.19	-40.00	-12.19
14500.0	H	-	-	-77.47	16.01	45.54	-49.71	-40.00	-9.71

Table 7-10. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7360.0	H	-	-	-77.56	9.33	38.77	-56.49	-40.00	-16.49
11040.0	H	-	-	-79.02	15.87	43.85	-51.41	-40.00	-11.41
14720.0	H	-	-	-77.96	16.67	45.71	-49.55	-40.00	-9.55

Table 7-11. Radiated Spurious Data (NR Band n48 – High Channel)


FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 60 of 69

7.7.4 Antenna 4b Radiated Spurious Emissions Measurements


NR Band n48

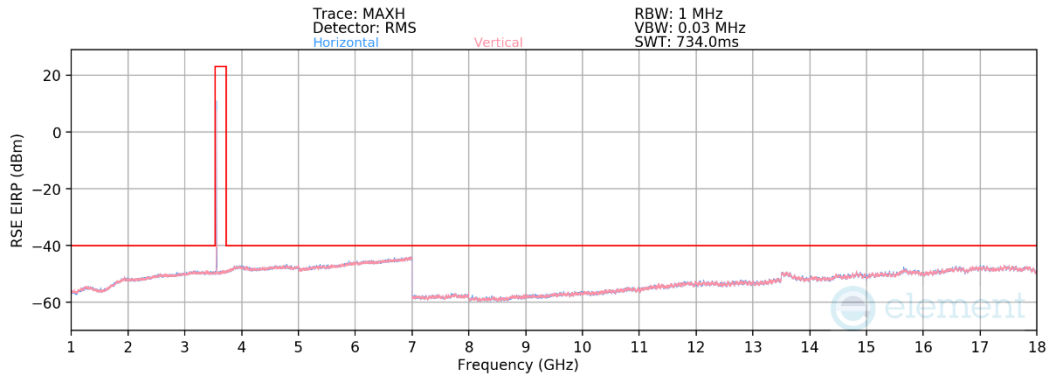

Plot 7-65. Radiated Spurious Plot 1 – 18GHz (NR Band n48)

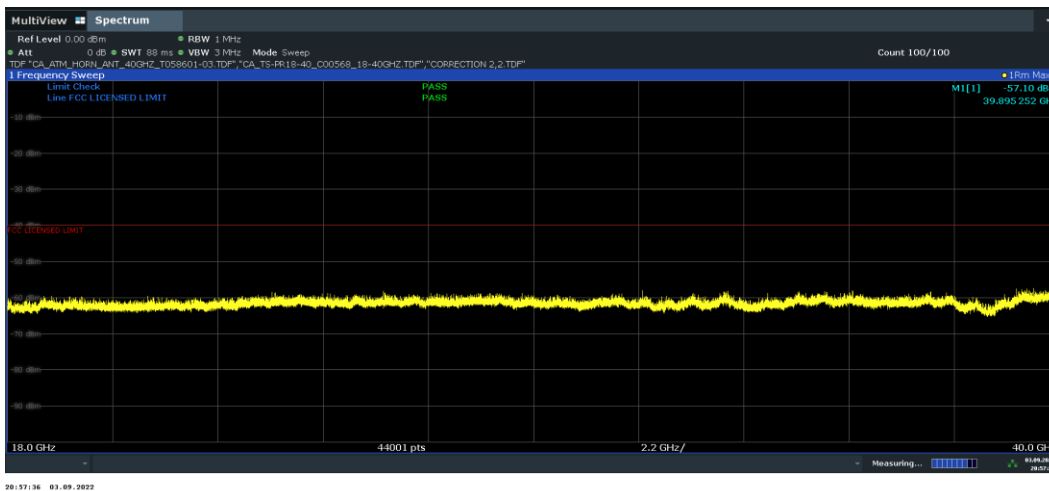

Plot 7-66. Radiated Spurious Plot 18 – 40GHz (NR Band n48, Ant. Pol H)

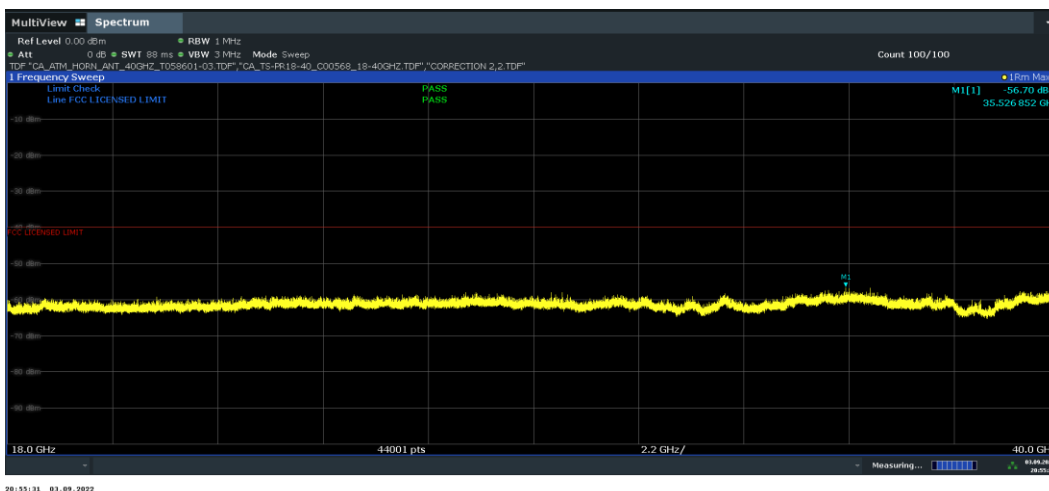

Plot 7-67. Radiated Spurious Plot 18 – 40GHz (NR Band n48, Ant. Pol V)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 61 of 69

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7140.0	H	-	-	-77.85	8.93	38.08	-57.18	-40.00	-17.18
10710.0	H	-	-	-78.90	14.88	42.98	-52.28	-40.00	-12.28
14280.0	H	-	-	-77.22	15.35	45.13	-50.13	-40.00	-10.13

Table 7-12. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-77.32	8.96	38.64	-56.62	-40.00	-16.62
10875.0	H	-	-	-79.79	15.24	42.45	-52.81	-40.00	-12.81
14500.0	H	-	-	-77.74	16.01	45.27	-49.98	-40.00	-9.98

Table 7-13. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7360.0	H	-	-	-77.63	9.33	38.70	-56.56	-40.00	-16.56
11040.0	H	-	-	-79.55	15.87	43.32	-51.94	-40.00	-11.94
14720.0	H	-	-	-78.59	16.67	45.08	-50.18	-40.00	-10.18

Table 7-14. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 62 of 69

7.7.5 Antenna 2a Radiated Spurious Emissions Measurements

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7140.0	H	-	-	-79.47	8.93	36.46	-58.80	-40.00	-18.80
10710.0	H	-	-	-82.77	14.88	39.11	-56.15	-40.00	-16.15
14280.0	H	-	-	-83.11	15.35	39.24	-56.02	-40.00	-16.02

Table 7-15. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-79.37	8.96	36.59	-58.67	-40.00	-18.67
10875.0	H	-	-	-83.15	15.24	39.09	-56.17	-40.00	-16.17
14500.0	H	-	-	-83.65	16.01	39.36	-55.89	-40.00	-15.89

Table 7-16. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7360.0	H	-	-	-79.64	9.33	36.69	-58.57	-40.00	-18.57
11040.0	H	-	-	-82.81	15.87	40.06	-55.20	-40.00	-15.20
14720.0	H	-	-	-84.19	16.67	39.48	-55.78	-40.00	-15.78

Table 7-17. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 63 of 69

7.8 Frequency Stability / Temperature Variation

§2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015

TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

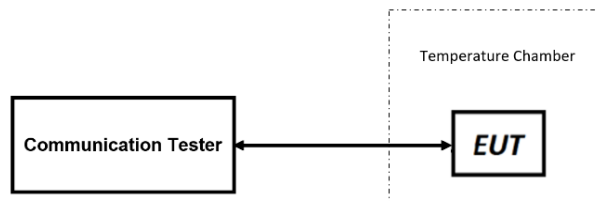



Figure 7-7. Test Instrument & Measurement Setup

Test Notes

All ports were tested and only the worst case data were reported.


FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 64 of 69

V2.1 11/9/2021

Frequency Stability / Temperature Variation

NR Band n48							
		Low Channel Frequency (Hz):		3,570,000,000			
		High Channel Frequency (Hz):		3,680,000,000			
		Ref. Voltage (VDC):		3.80			
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	3,569,999,025	3,570,000,925	-476	473	-0.000013333
		- 20	3,569,999,024	3,570,000,932	-477	480	0.000013445
		- 10	3,569,999,023	3,570,000,940	-478	488	0.000013669
		0	3,569,999,021	3,570,000,934	-480	482	0.000013501
		+ 10	3,569,999,000	3,570,000,917	-501	465	-0.000014034
		+ 20 (Ref)	3,569,999,501	3,570,000,452	0	0	0.000000000
		+ 30	3,569,999,020	3,570,000,971	-481	519	0.000014538
		+ 40	3,569,999,021	3,570,000,955	-480	503	0.000014090
Battery Endpoint	3.23	+ 50	3,569,999,019	3,570,000,952	-482	500	0.000014006
		+ 20	3,569,999,009	3,570,000,953	-492	501	0.000014034

Table 7-18. NR Band n48 Frequency Stability Data

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 65 of 69

7.9 End User Device Additional Requirement (CBSD Protocol)
§96.47

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (AirSpan FCC ID: PIDAV2700) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03

WINNF-TS-0122 v1.0.2


Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.

1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3560 – 3580MHz.
 - b. Enable AP/CBSD service.
 - c. Check EUT Tx frequency.
 - d. Disable AP/CBSD service and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3640 – 3660MHz.
 - b. Enable AP/CBSD service.
 - c. Check EUT Tx frequency.
 - d. Disable AP/CBSD service and check EUT stop transmission within 10s.


Test Notes

The EUT is an End User Device.


FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 66 of 69

Run#1:

- Tx Frequency Set: 3560 – 3580MHz
- MaxEIRP Set: 10dBm/MHz

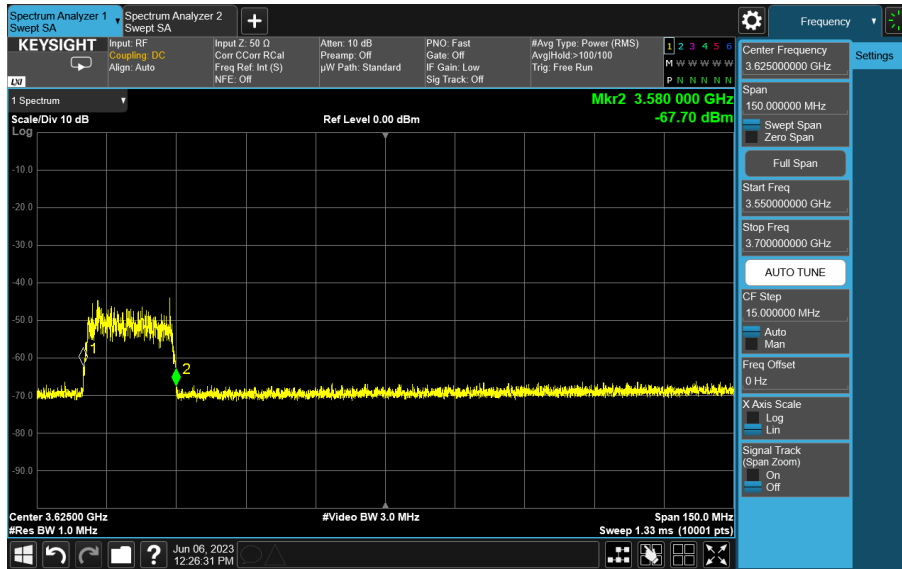

Plot 7-68. Run#1 End User Device Frequency of Operations

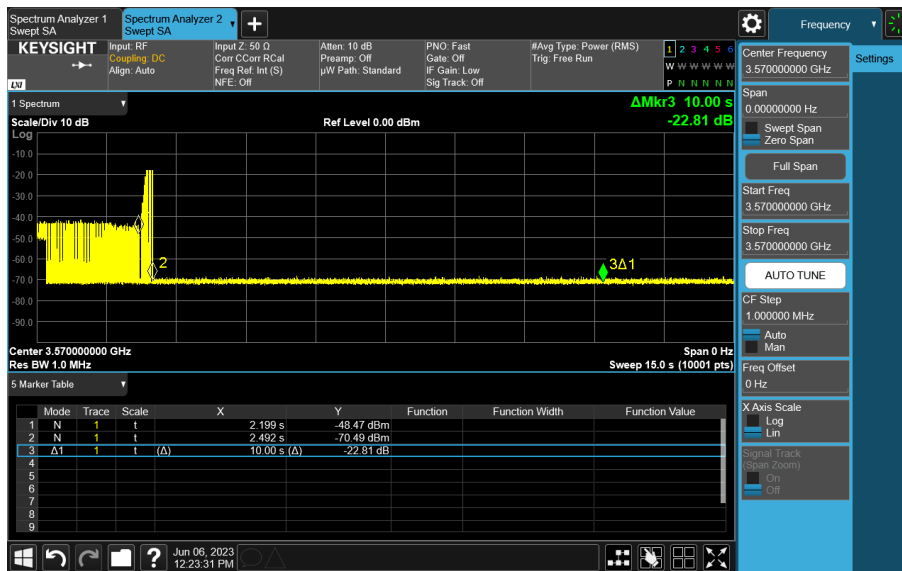

Plot 7-69. Run#1 End User Device Discontinues Operations within 10s


Note:

- Marker 1: CBSD sends instructions to discontinue NR operations.
- Marker 2: EUT discontinues operation.
- Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.


FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 67 of 69

Run#2:

- Tx Frequency Set: 3640 – 3660MHz
- MaxEIRP Set: 10dBm/MHz

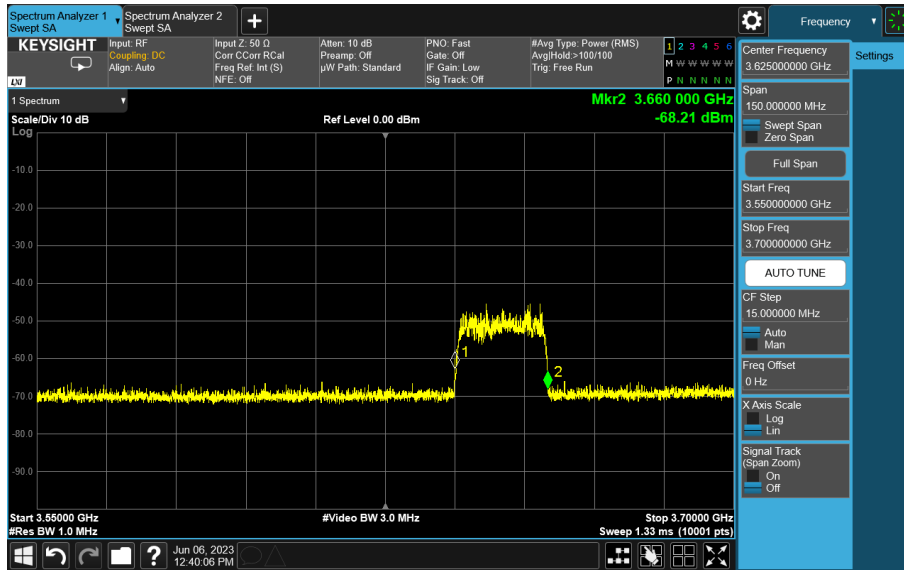

Plot 7-70. Run#2 End User Device Frequency of Operations

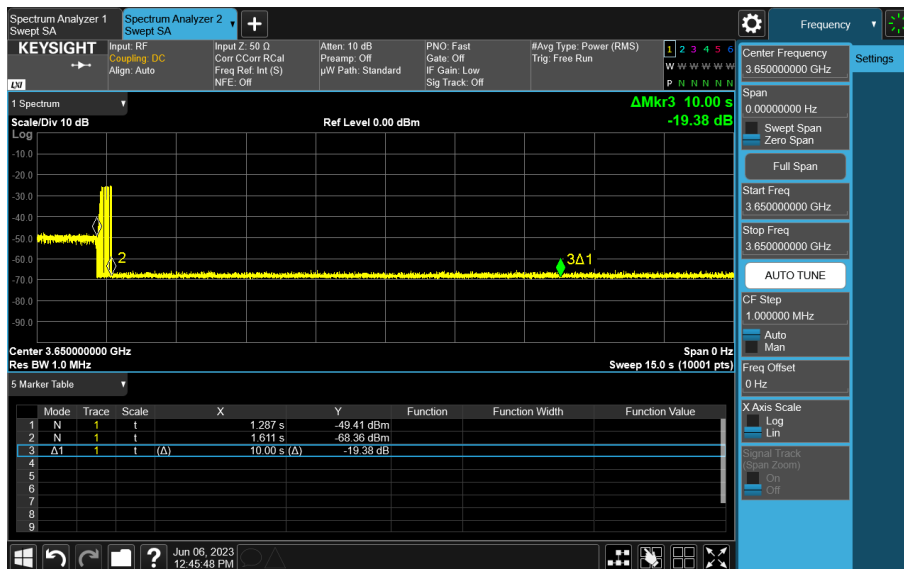

Plot 7-71. Run#2 End User Device Discontinues Operations within 10s


Note:

- Marker 1: CBSD sends instructions to discontinue NR operations.
- Marker 2: EUT discontinues operation.
- Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE	Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 68 of 69

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple **Tablet Devices FCC ID: BCGA2435** complies with all of the End User Device requirements of Part 96 of the FCC Rules.

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1C2305090017-01.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 69 of 69