


7.7.7 Antenna WF5t Radiated Band Edge Measurements (160MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

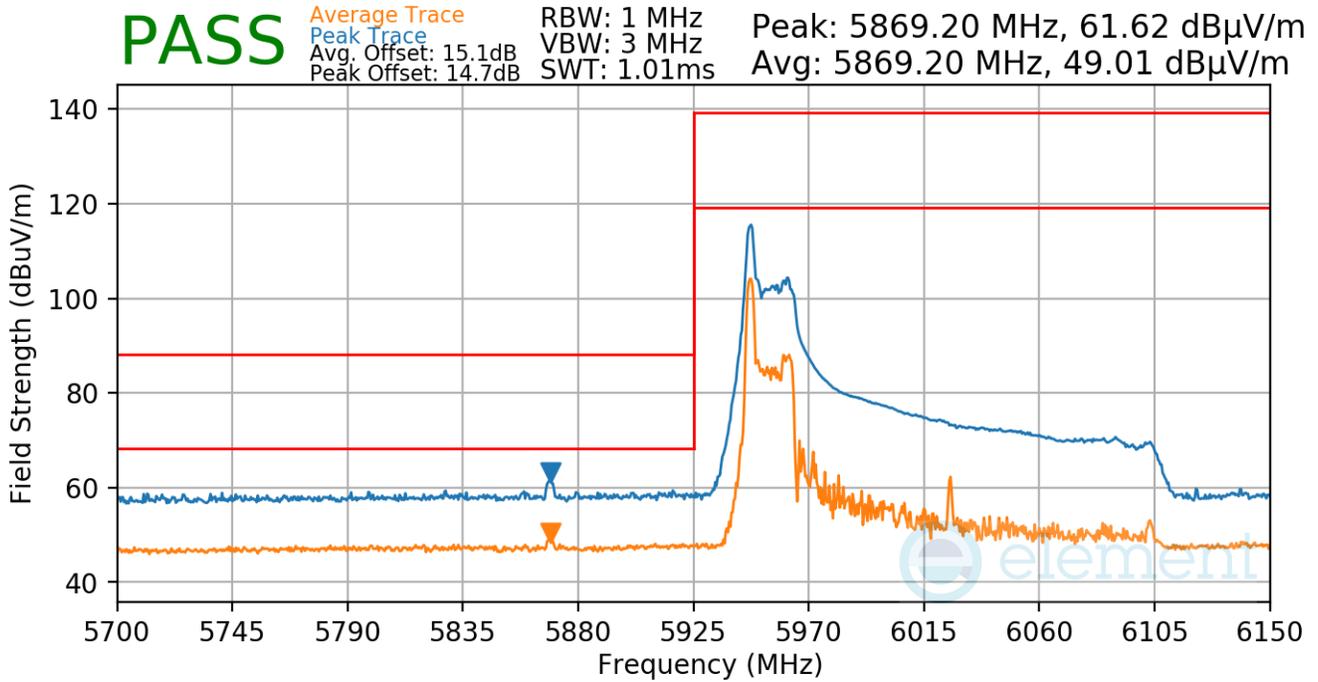

Plot 7-771. Antenna WF5t Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 276 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

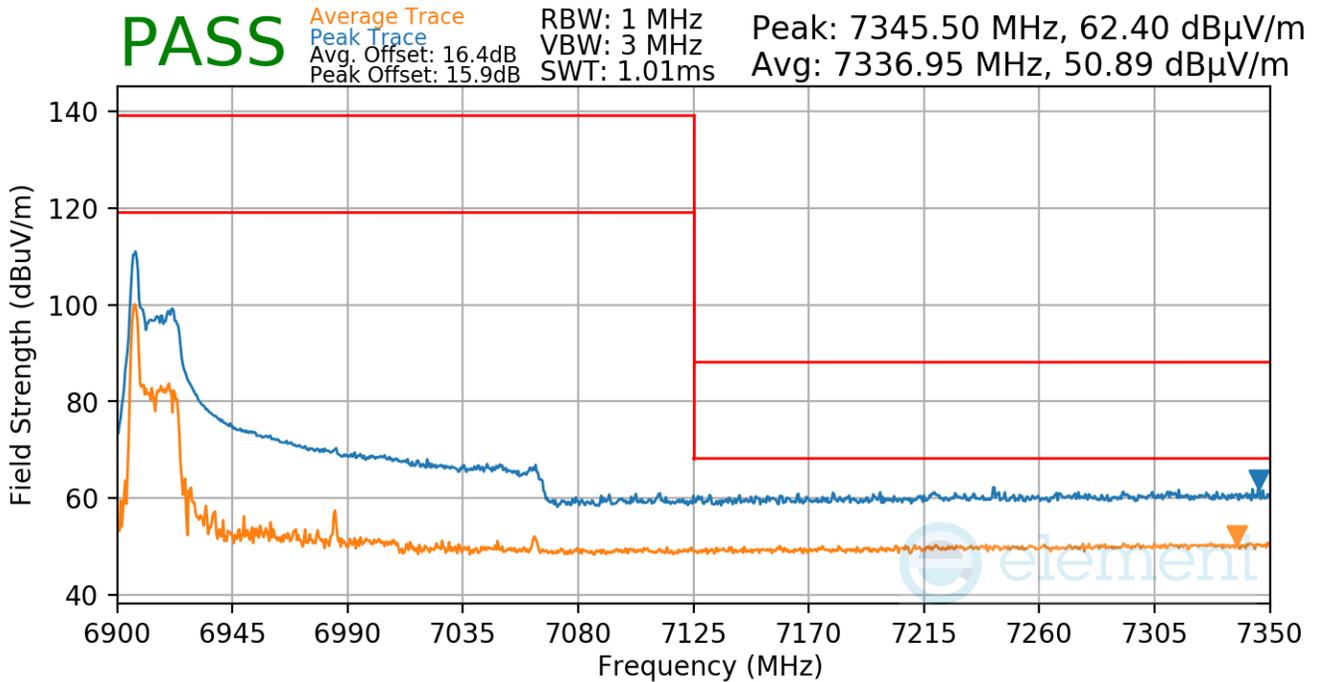


Plot 7-772. Antenna WF5t Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device
© 2022 ELEMENT		Page 277 of 323

RU996x2


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

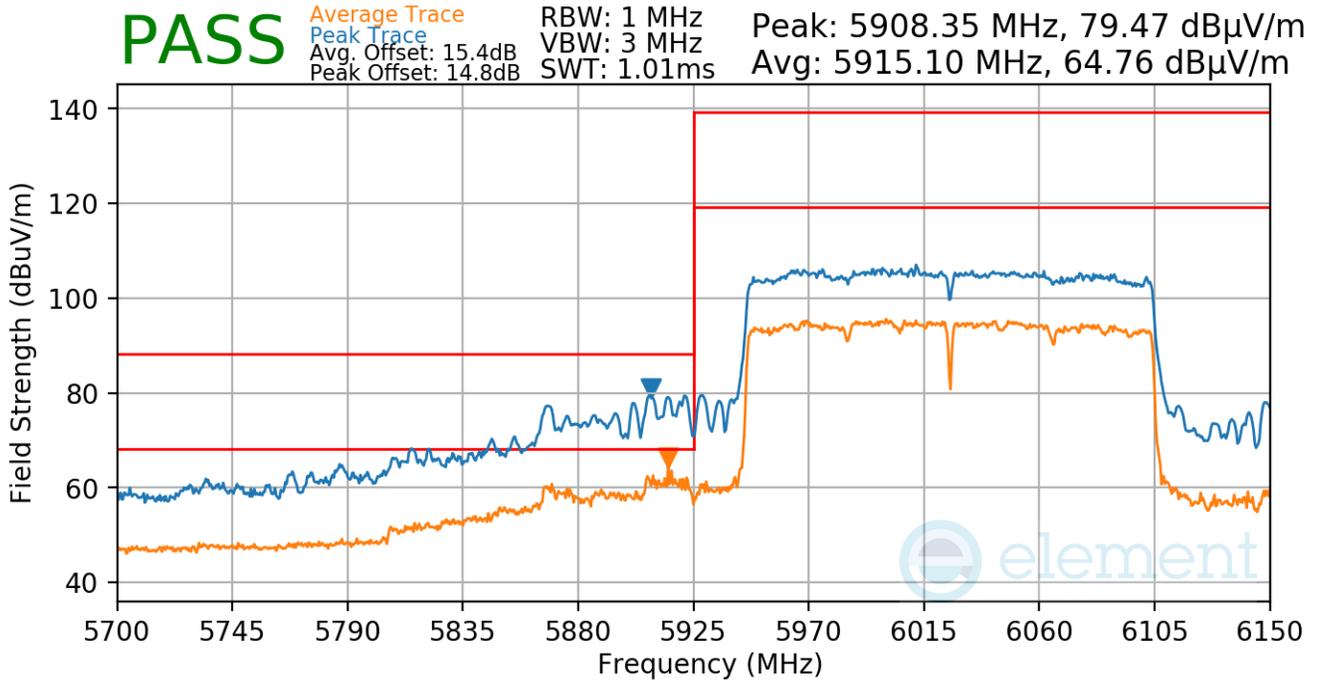

Plot 7-773. Antenna WF5t Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996x2)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 278 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

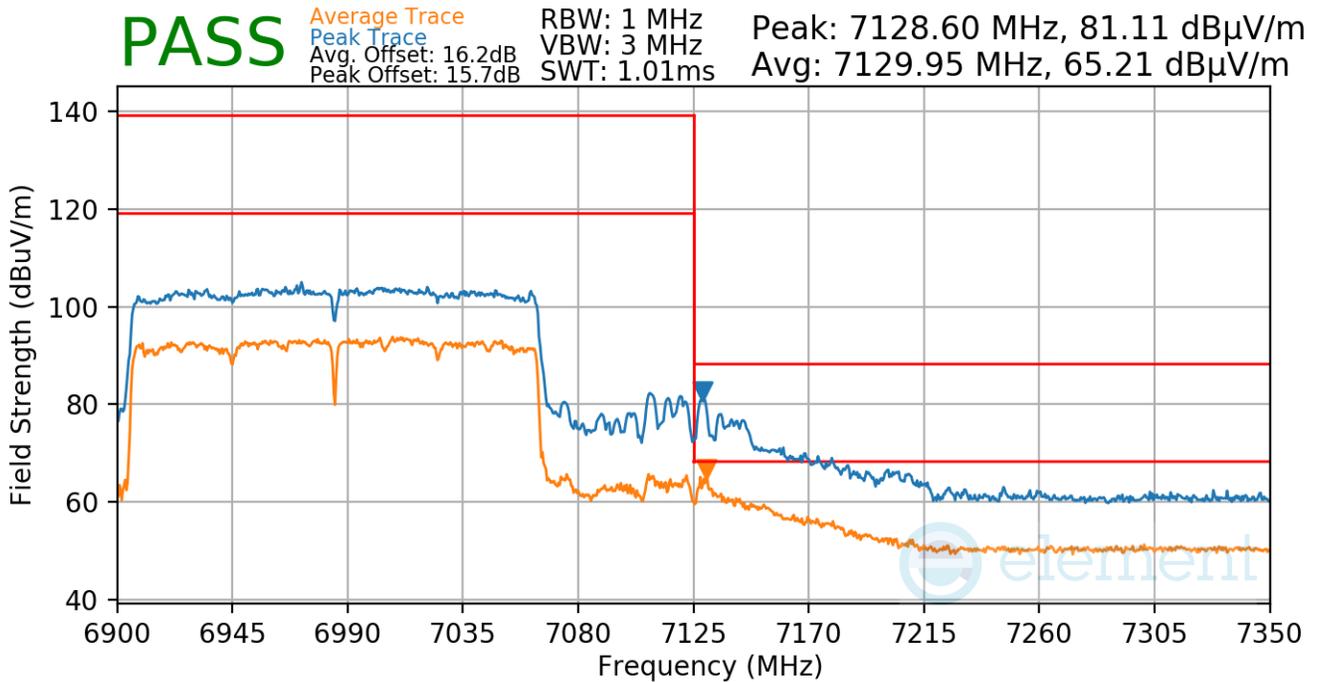


Plot 7-774. Antenna WF5t Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU996x2)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 279 of 323

7.7.8 Antenna WF5b Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

RU26


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

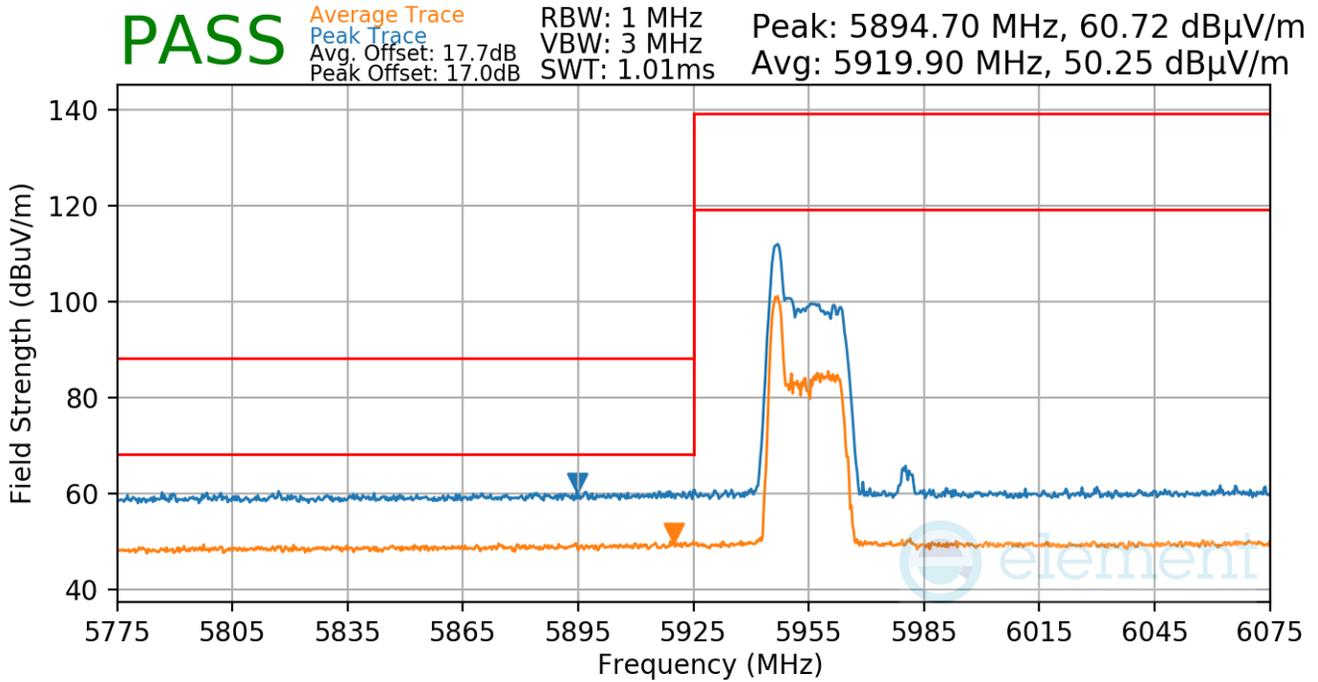

Plot 7-775. Antenna WF5b Radiated Lower Band Edge (Peak/Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 280 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

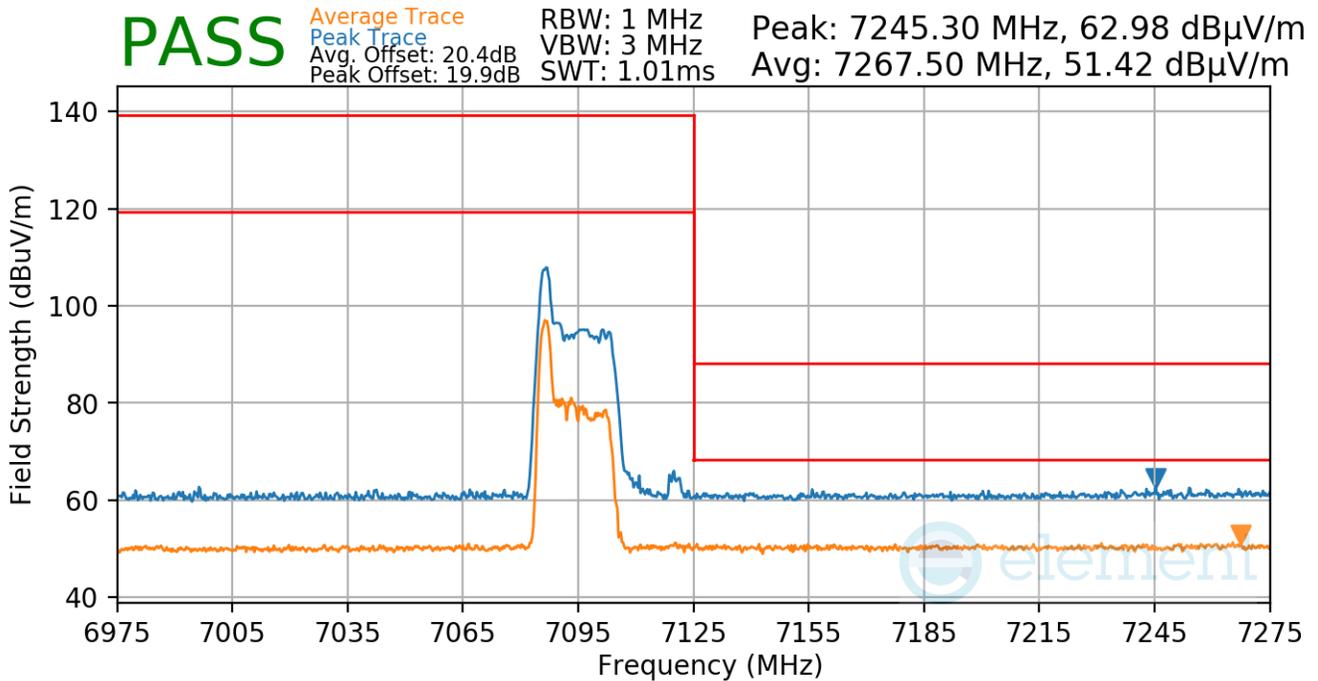


Plot 7-776. Antenna WF5b Radiated Upper Band Edge (Peak/Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG		Test Dates: 5/30/2022 - 9/16/2022

RU242


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

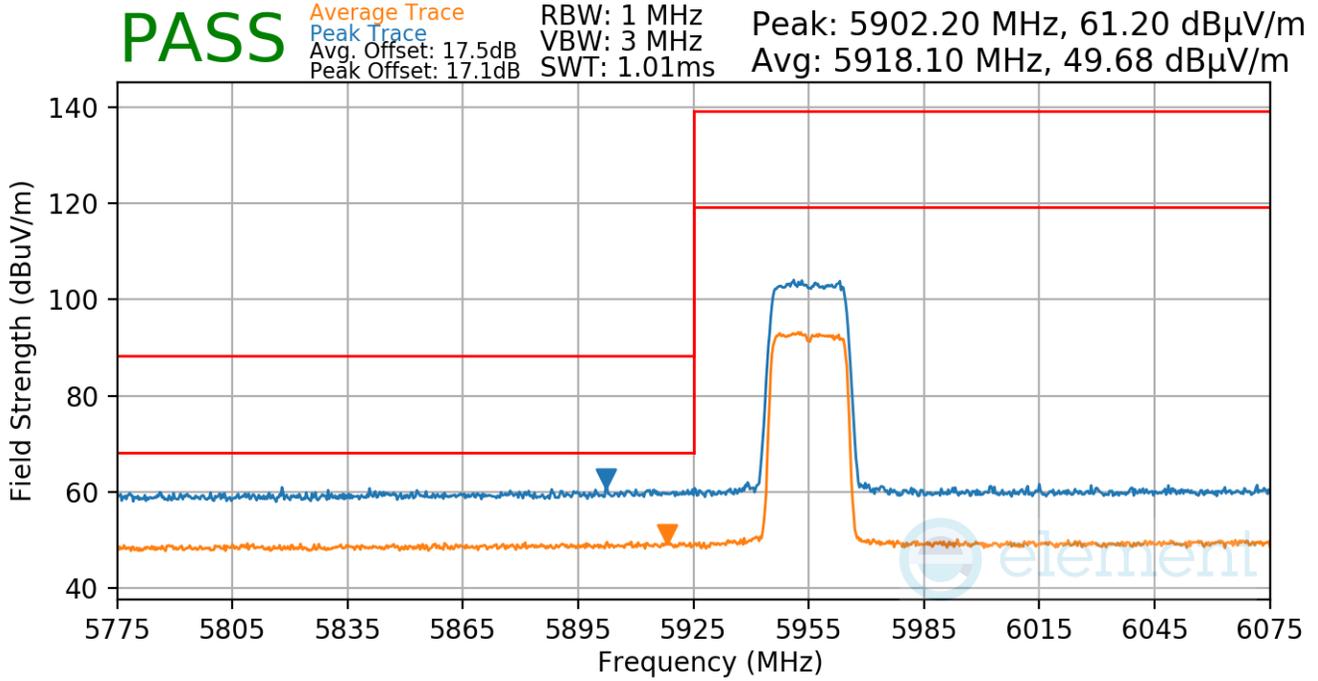

Plot 7-777. Antenna WF5b Radiated Lower Band Edge (Peak/Average – UNII Band 5 – RU242)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 282 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

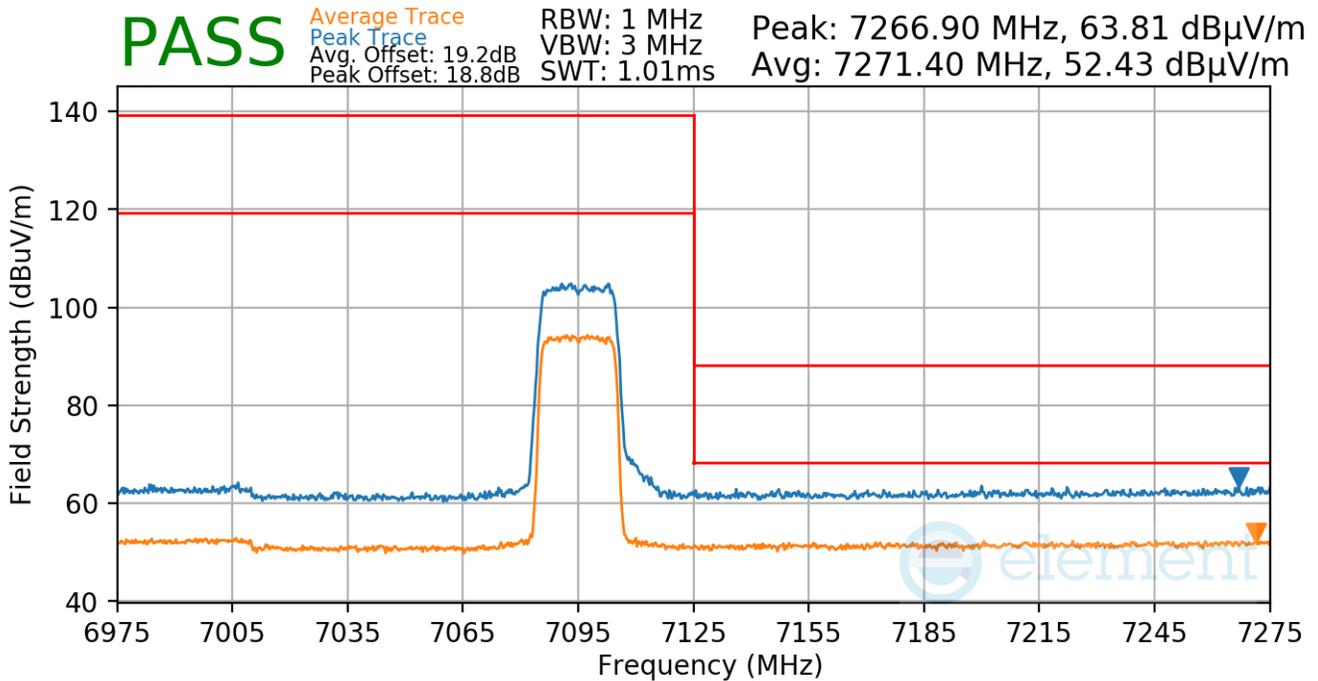


Plot 7-778. Antenna WF5b Radiated Upper Band Edge (Peak/Average – UNII Band 8 – RU242)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 283 of 323

7.7.9 Antenna WF5b Radiated Band Edge Measurements (40MHz BW)
 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

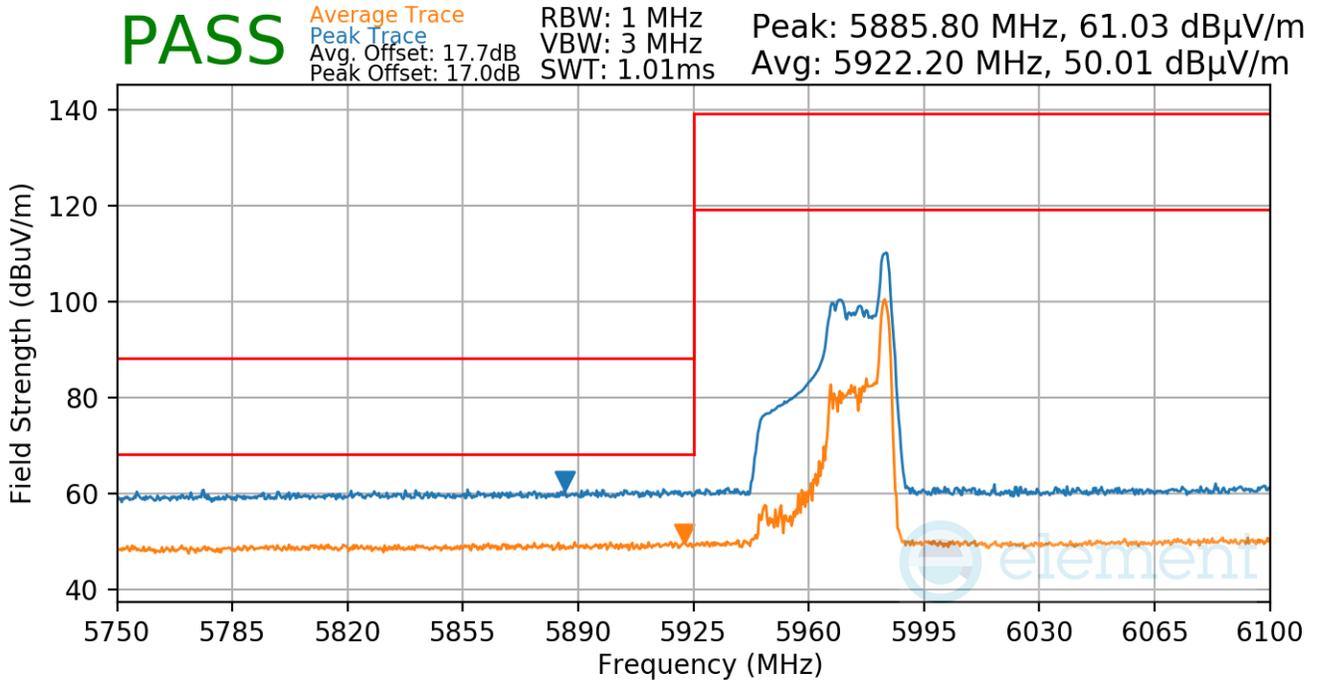

Plot 7-779. Antenna WF5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 284 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS5
 Distance of Measurements: 3 Meters
 Operating Frequency: 7085MHz
 Channel: 227

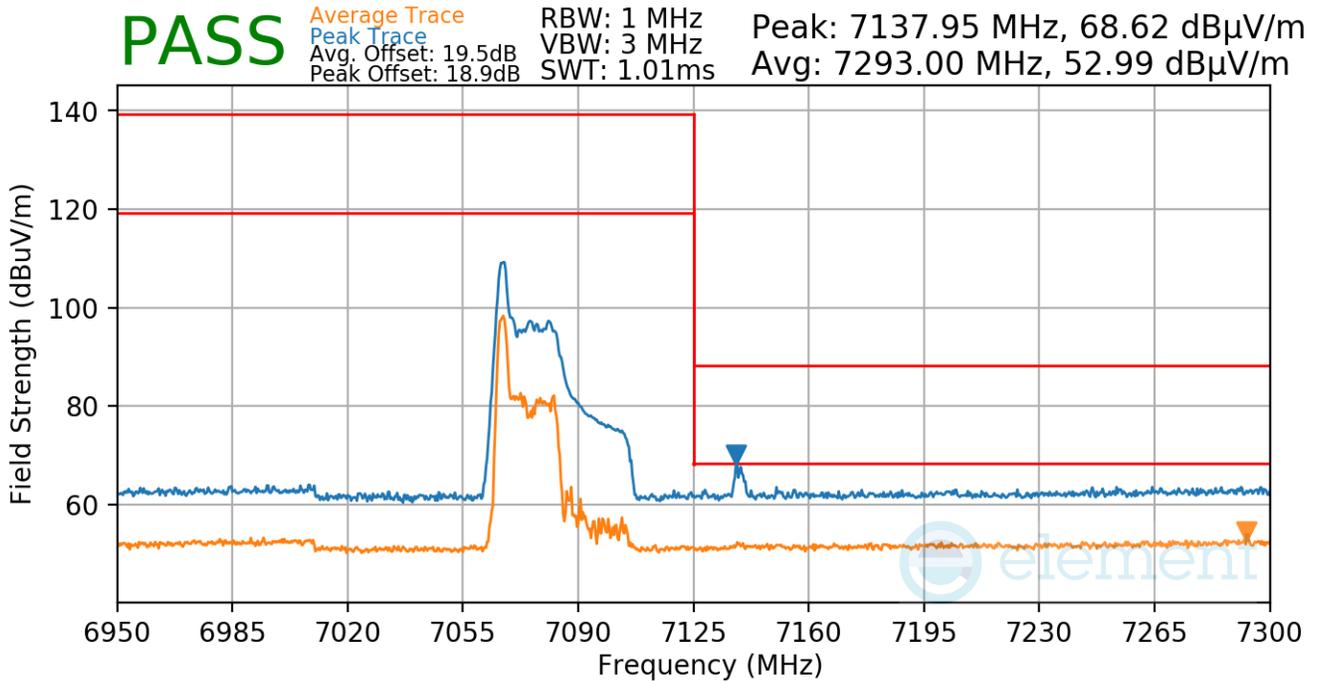


Plot 7-780. Antenna WF5b Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 285 of 323

RU484


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS5
 Distance of Measurements: 3 Meters
 Operating Frequency: 5965MHz
 Channel: 3

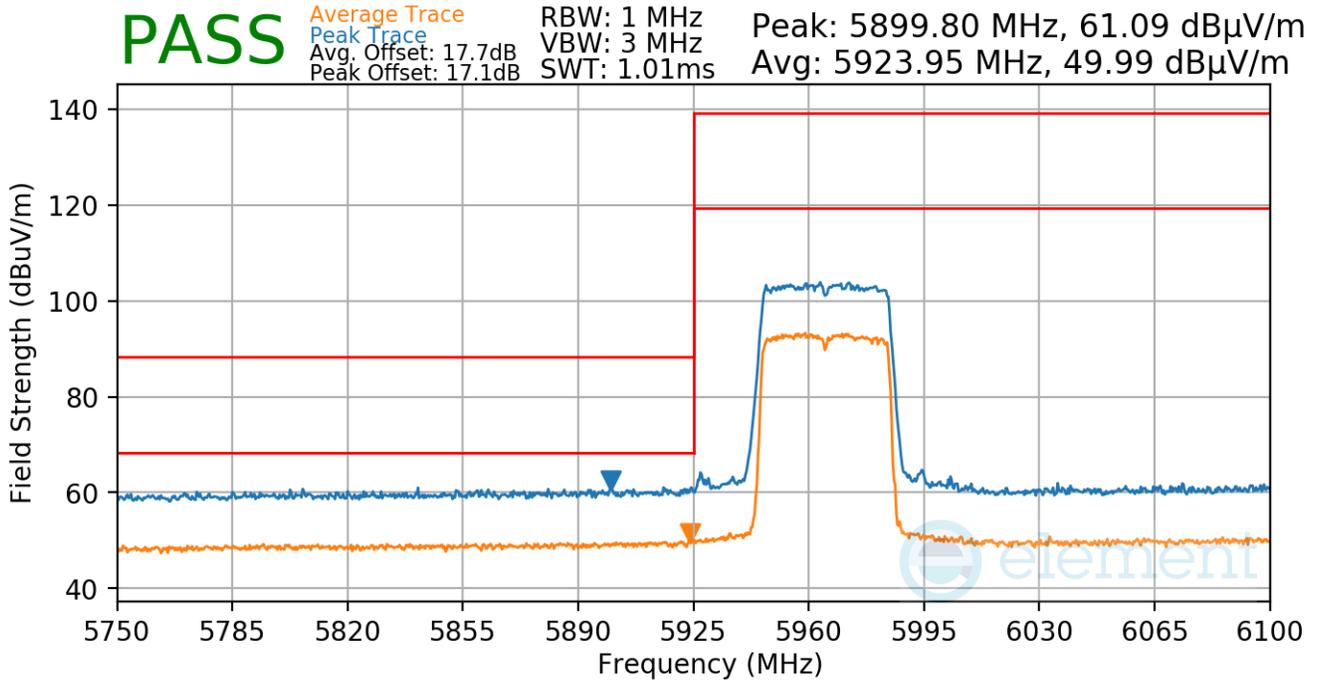

Plot 7-781. Antenna WF5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU484)

FCC ID: BCGA2436 IC: 579C-A2436	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device
© 2022 ELEMENT		V 10.5 12/15/2021

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS5
 Distance of Measurements: 3 Meters
 Operating Frequency: 7085MHz
 Channel: 227

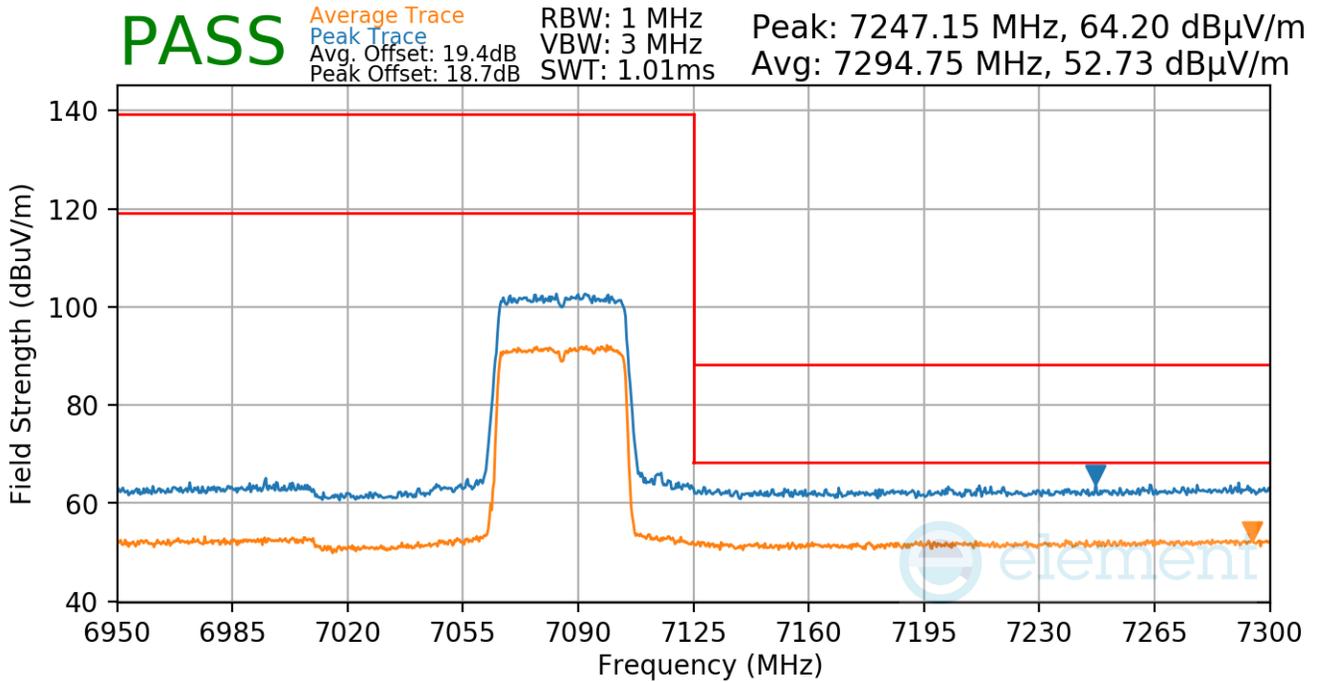


Plot 7-782. Antenna WF5b Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU484)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 287 of 323

7.7.10 Antenna WF5b Radiated Band Edge Measurements (80MHz BW)
 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

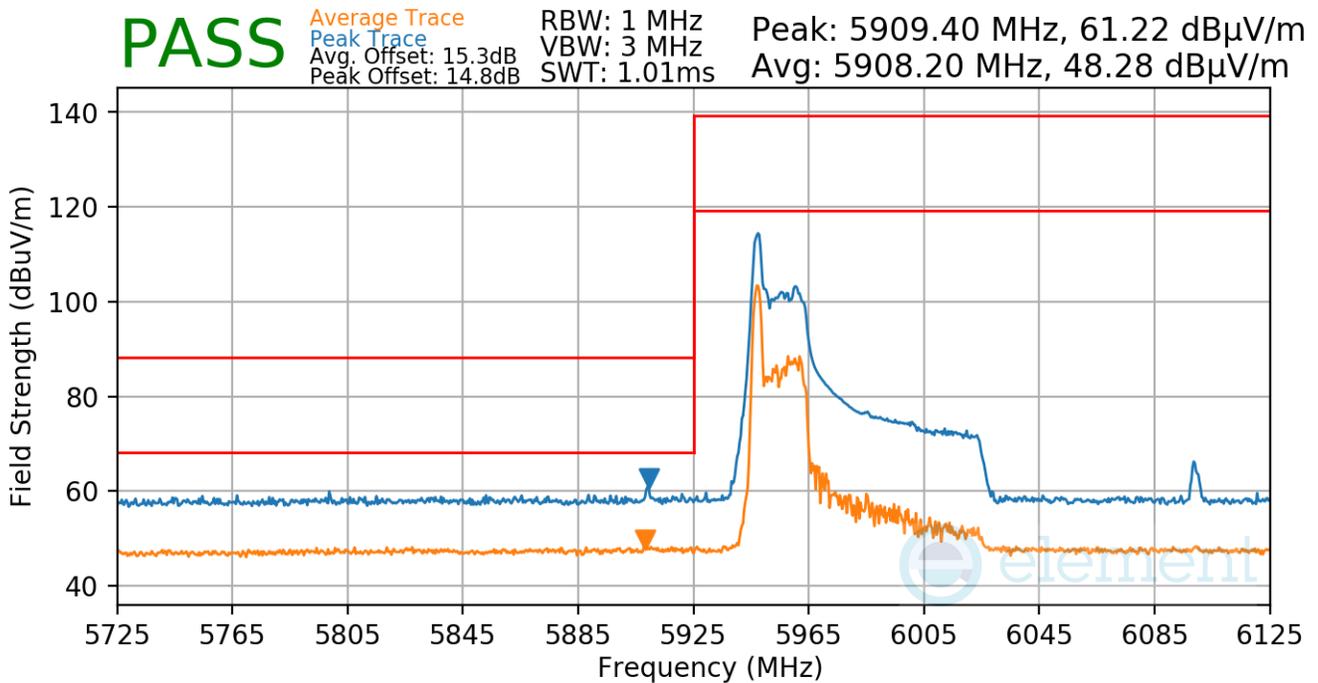

Plot 7-783. Antenna WF5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 288 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7025MHz
 Channel: 215

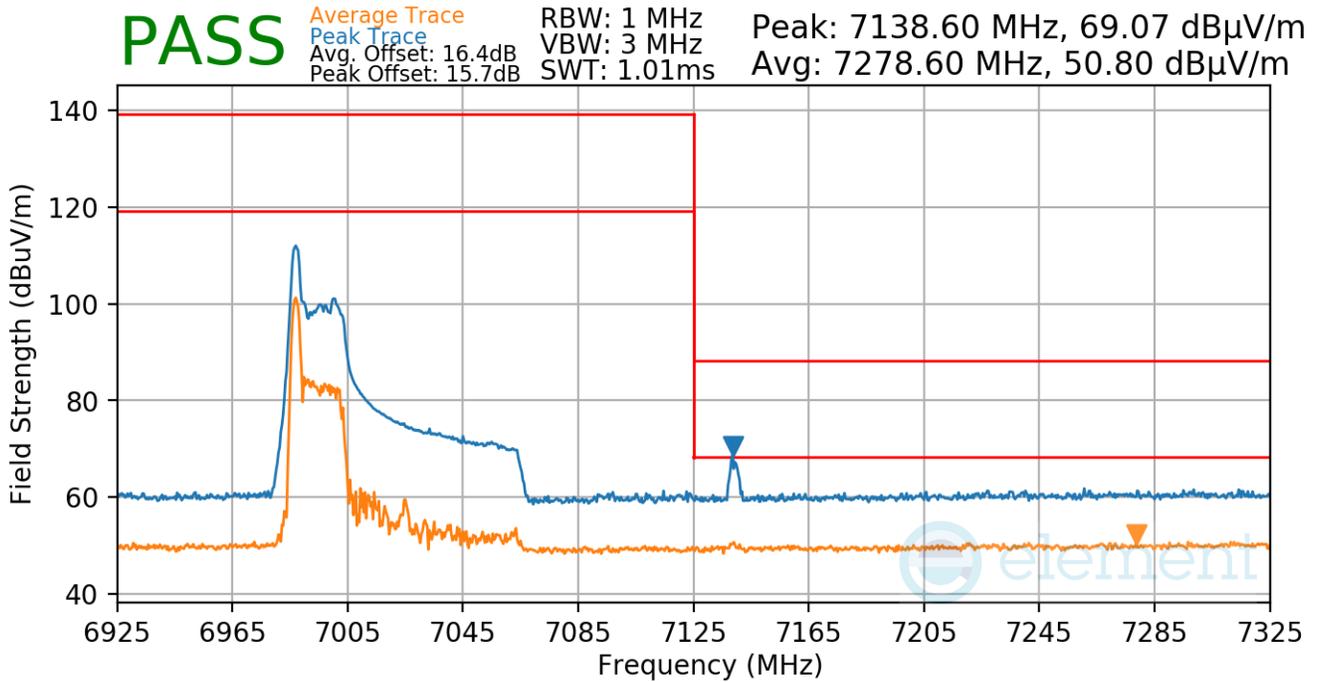


Plot 7-784. Antenna WF5b Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 289 of 323

RU996


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 5985MHz
 Channel: 7

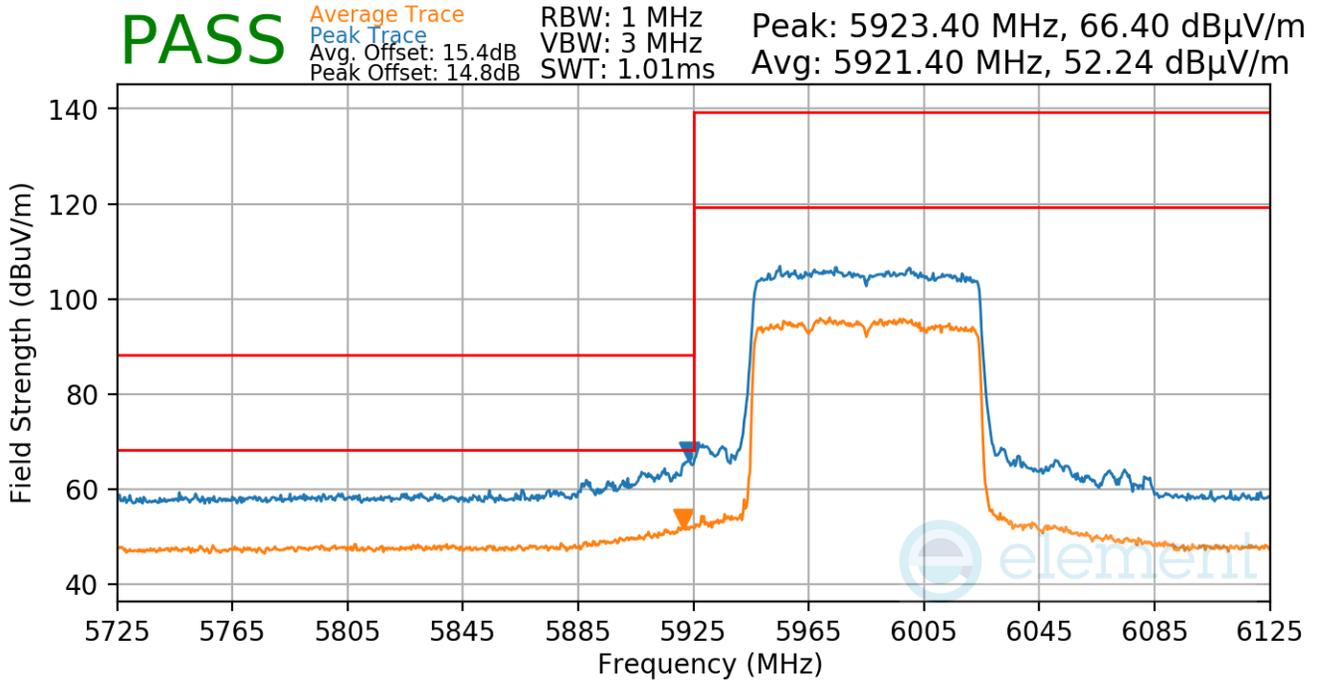

Plot 7-785. Antenna WF5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 290 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7025MHz
 Channel: 215

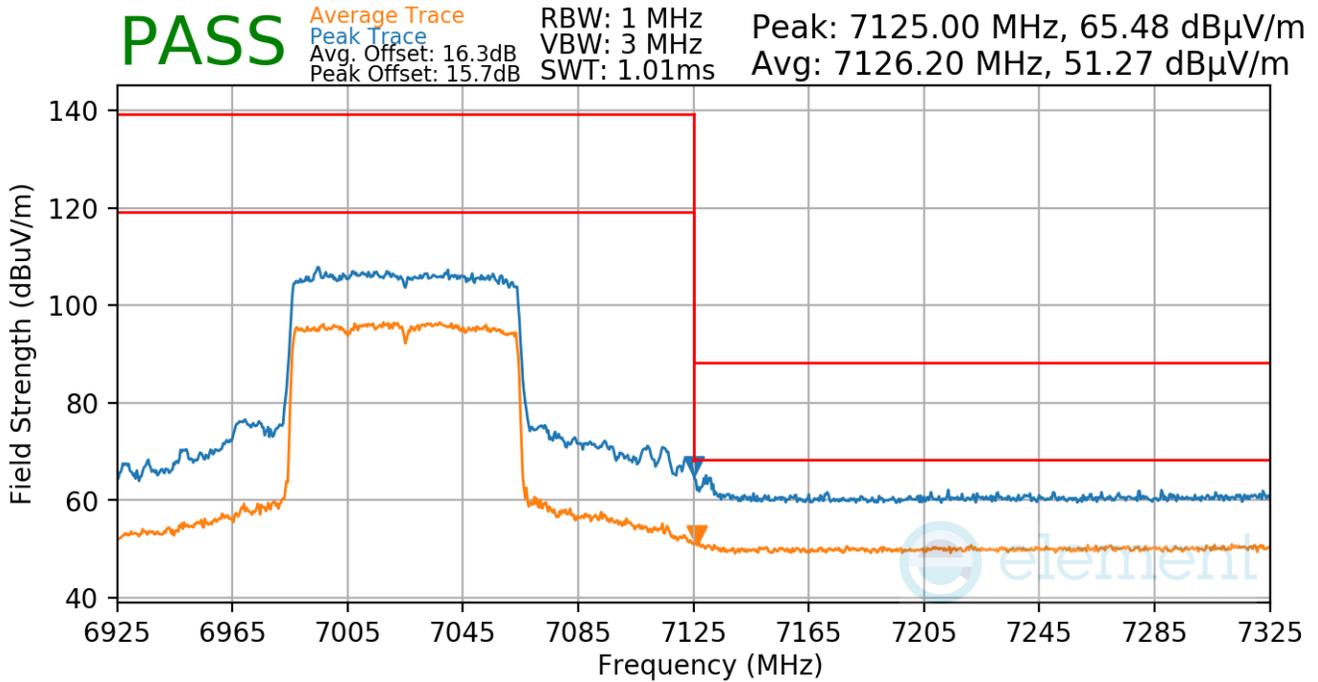


Plot 7-786. Antenna WF5b Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU996)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 291 of 323

7.7.11 Antenna WF5b Radiated Band Edge Measurements (160MHz BW)
 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

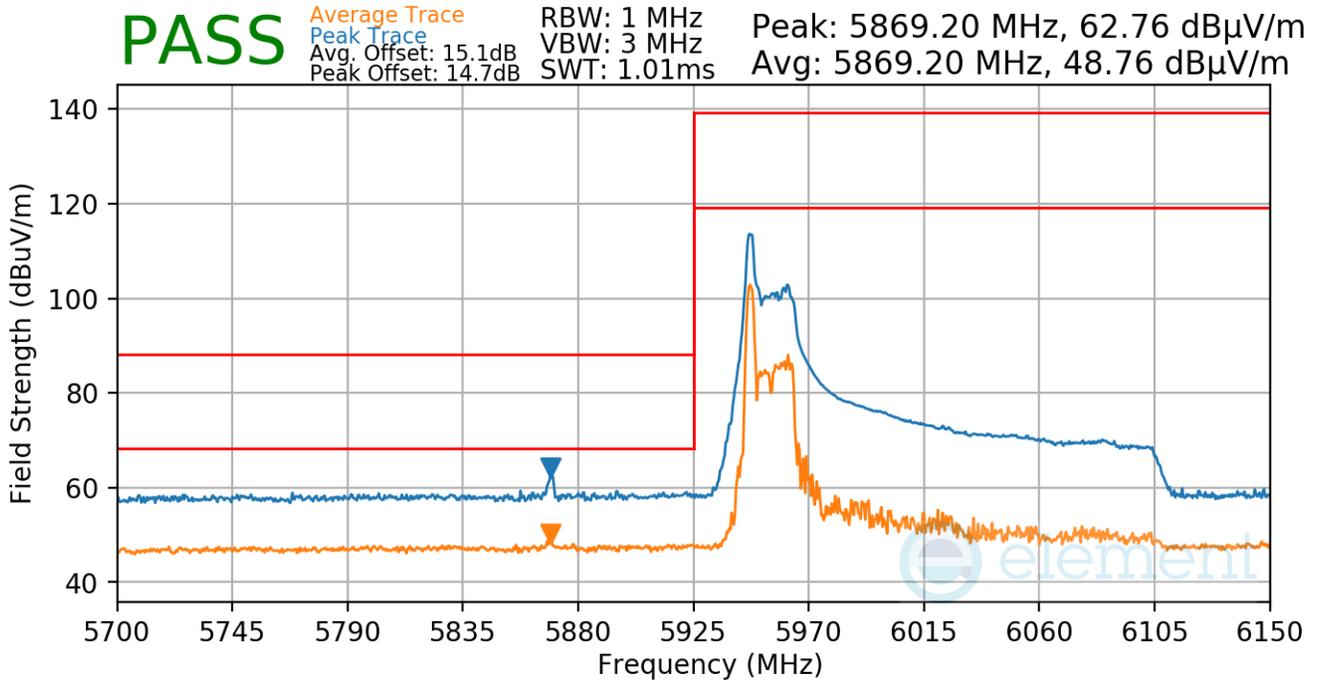

Plot 7-787. Antenna WF5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 292 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

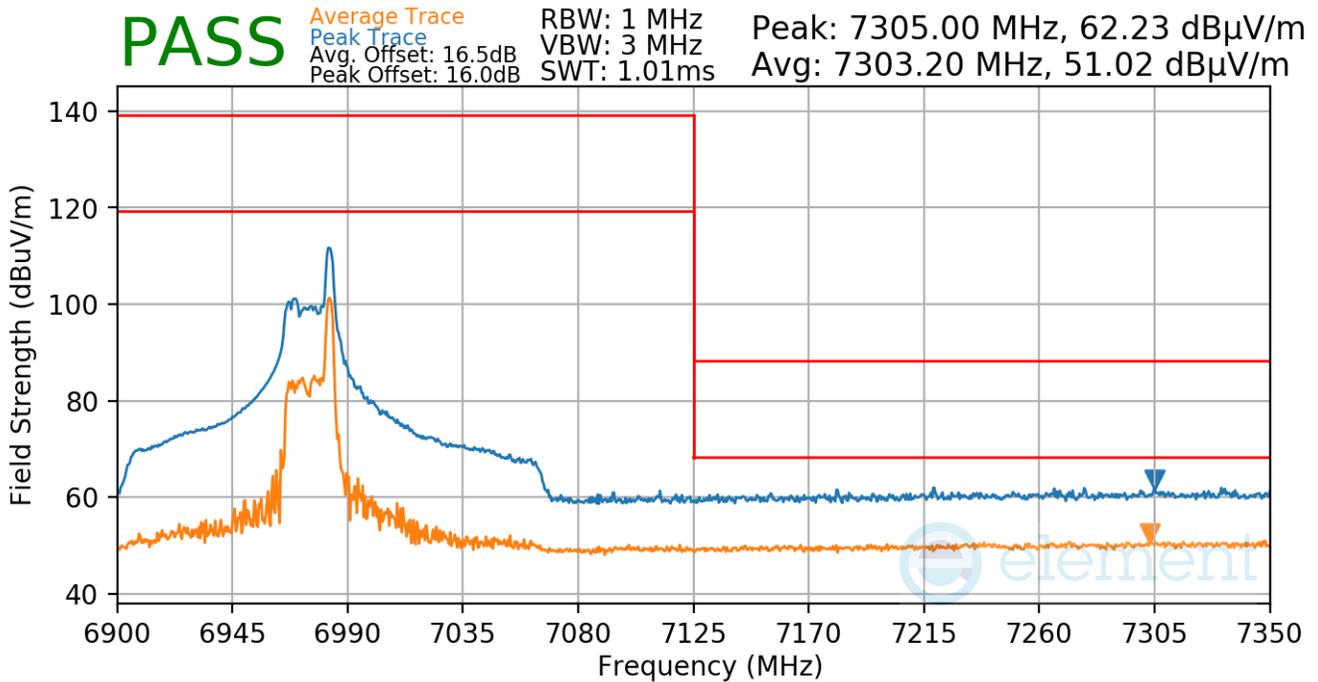


Plot 7-788. Antenna WF5b Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 293 of 323

RU996x2


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

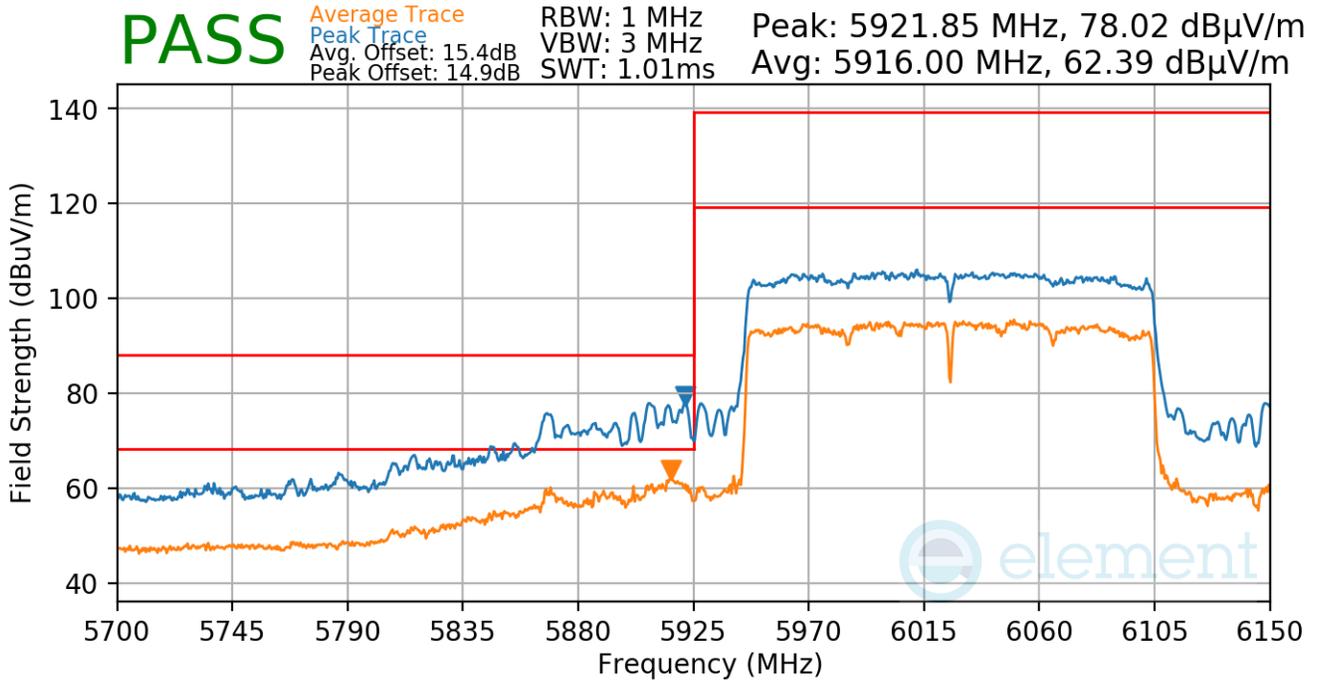

Plot 7-789. Antenna WF5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996x2)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 294 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

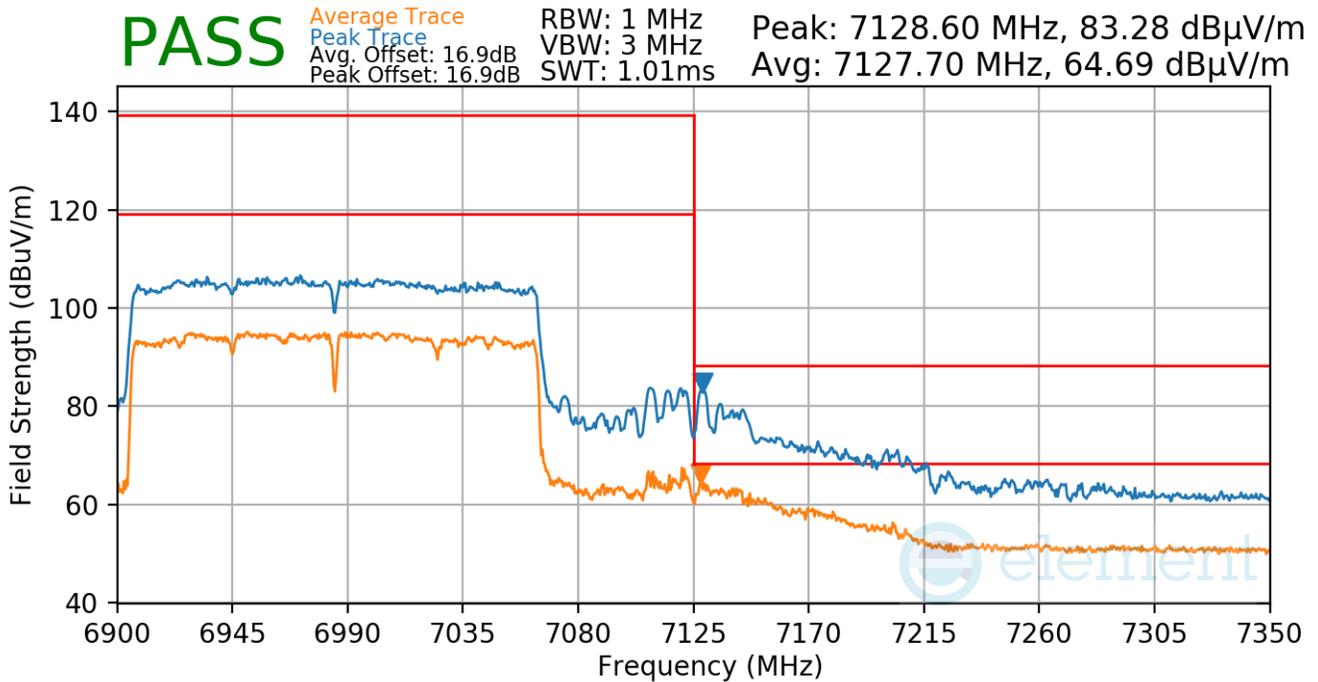


Plot 7-790. Antenna WF5b Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU996x2)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 295 of 323

7.7.12 SDM Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

RU26


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

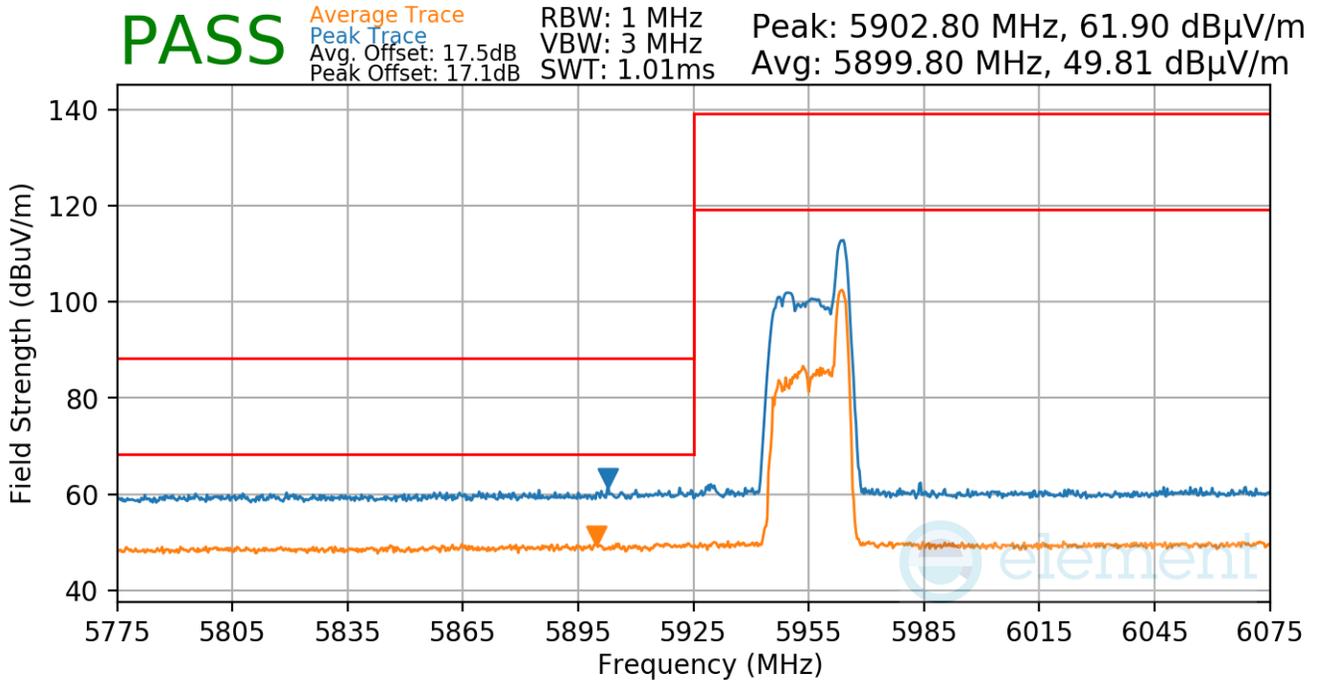

Plot 7-791. SDM Radiated Lower Band Edge (Peak/Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 296 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

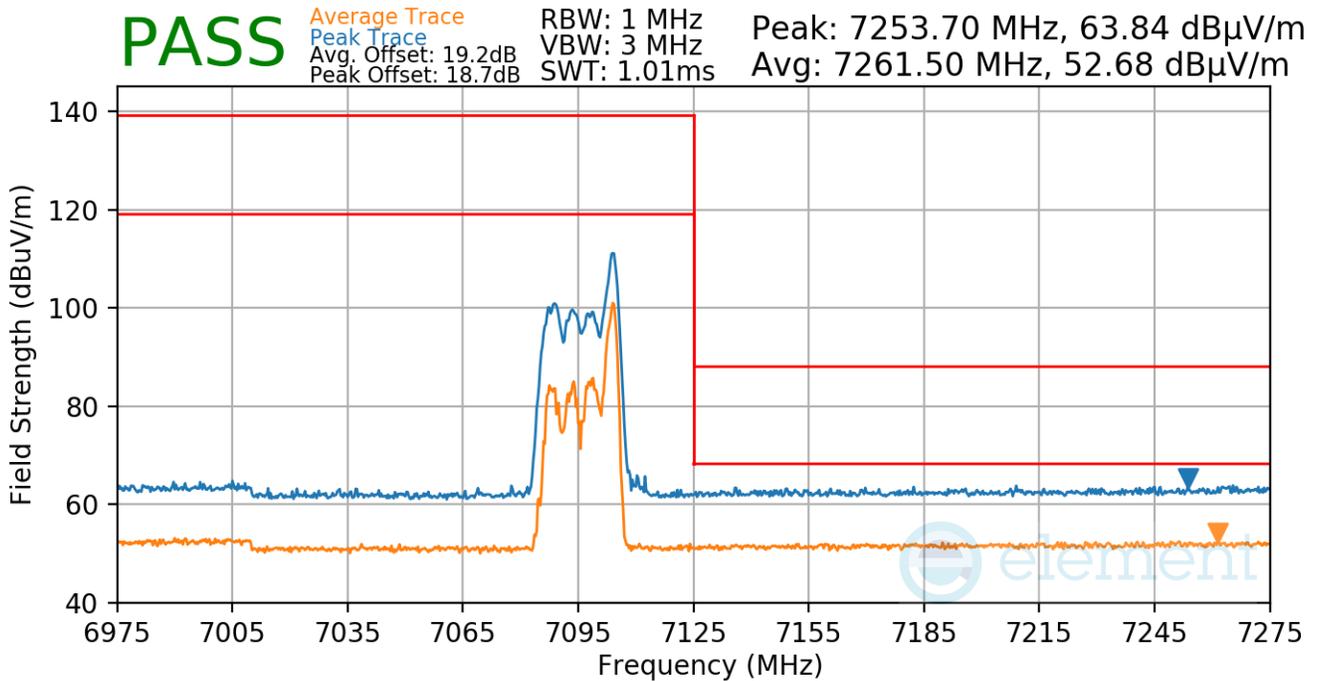


Plot 7-792. SDM Radiated Upper Band Edge (Peak/Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 297 of 323

RU242


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

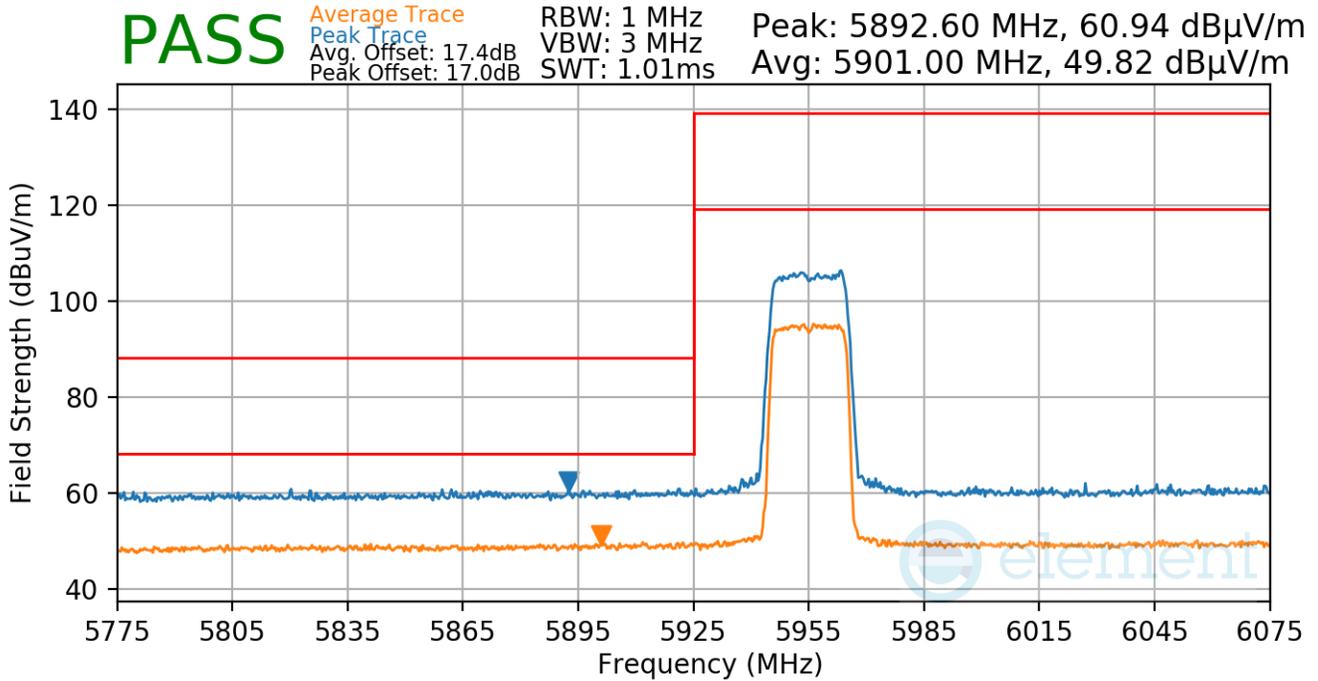

Plot 7-793. SDM Radiated Lower Band Edge (Peak/Average – UNII Band 5 – RU242)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 298 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

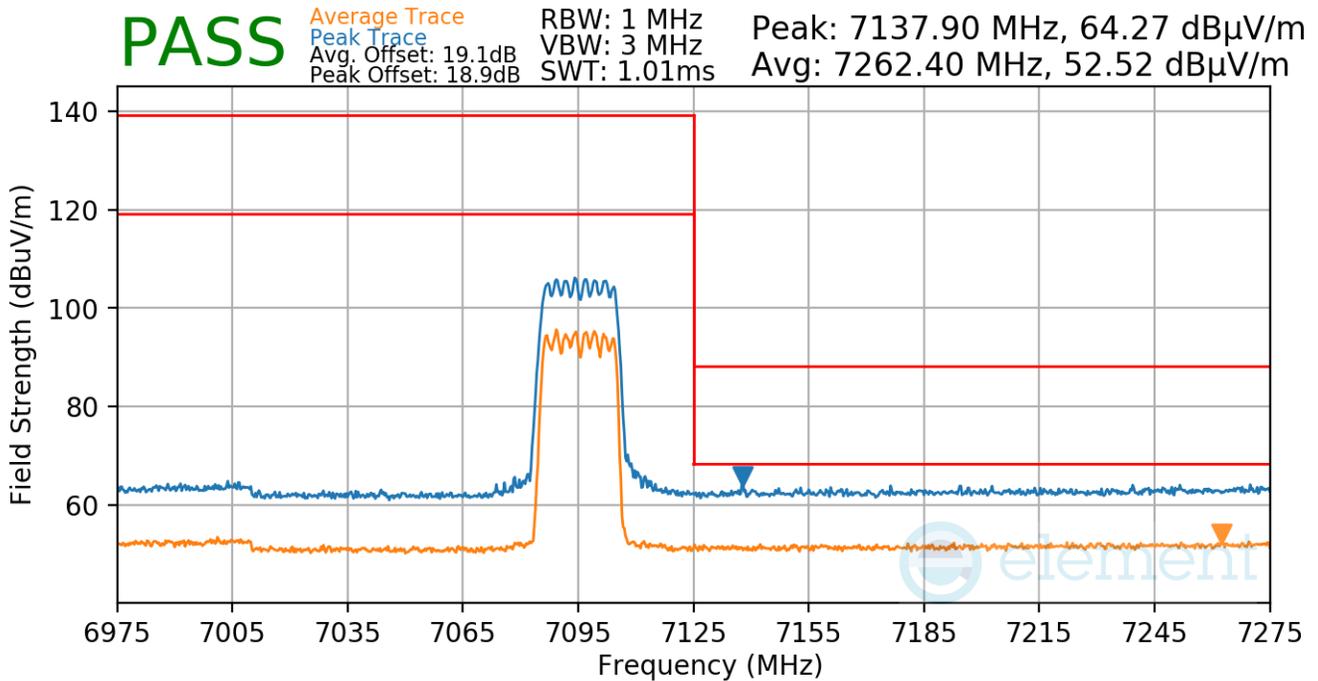


Plot 7-794. SDM Radiated Upper Band Edge (Peak/Average – UNII Band 8 – RU242)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 299 of 323

7.7.13 SDM Radiated Band Edge Measurements (40MHz BW)
 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

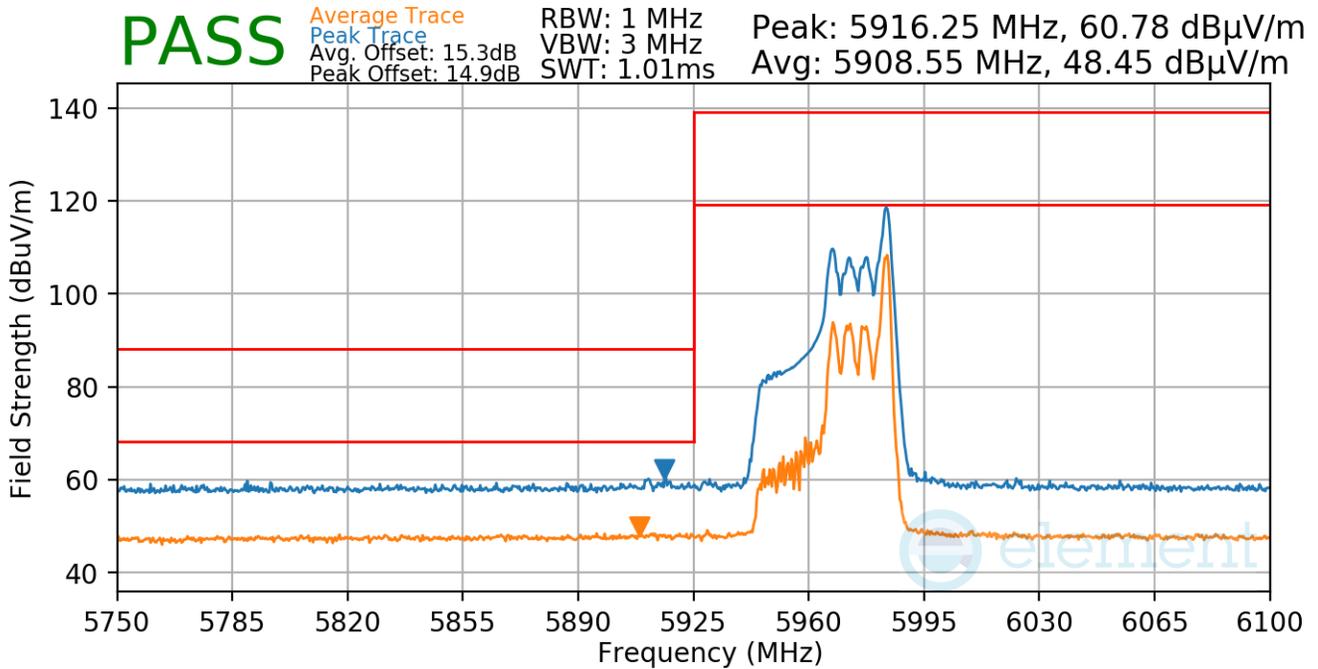

Plot 7-795. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 300 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7085MHz
 Channel: 227

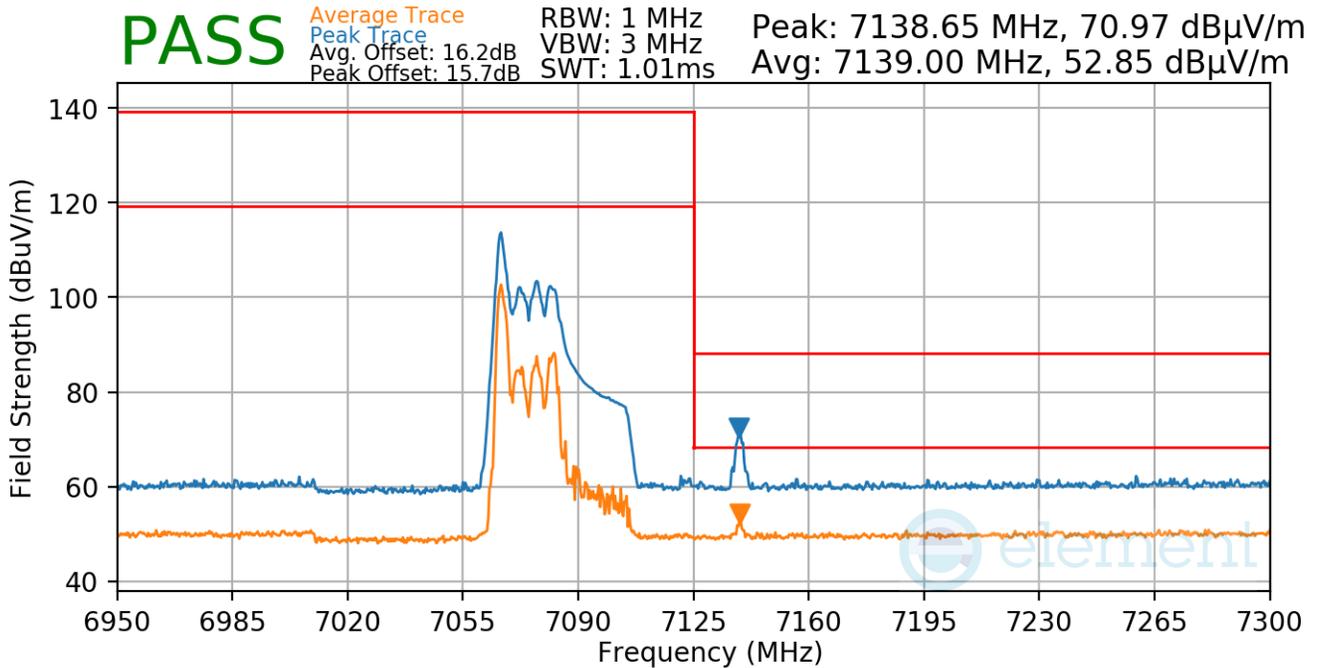


Plot 7-796. SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 301 of 323

RU484


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 5965MHz
 Channel: 3

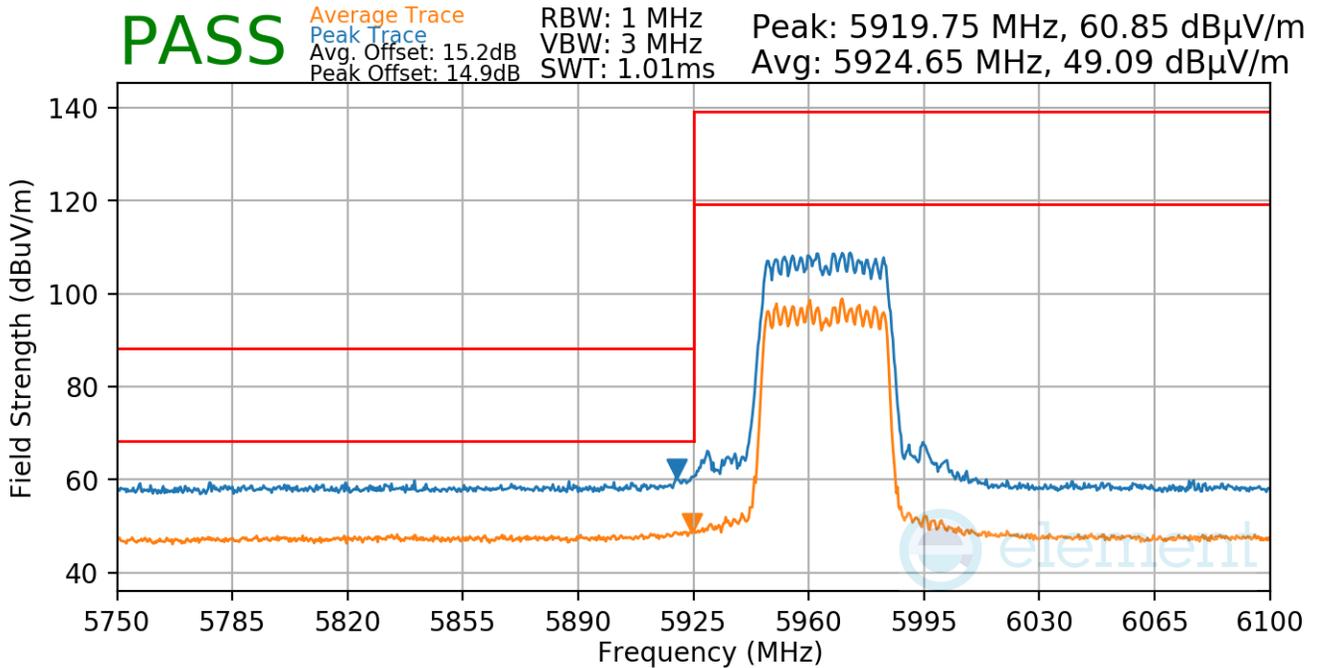

Plot 7-797. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU484)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 302 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7085MHz
 Channel: 227

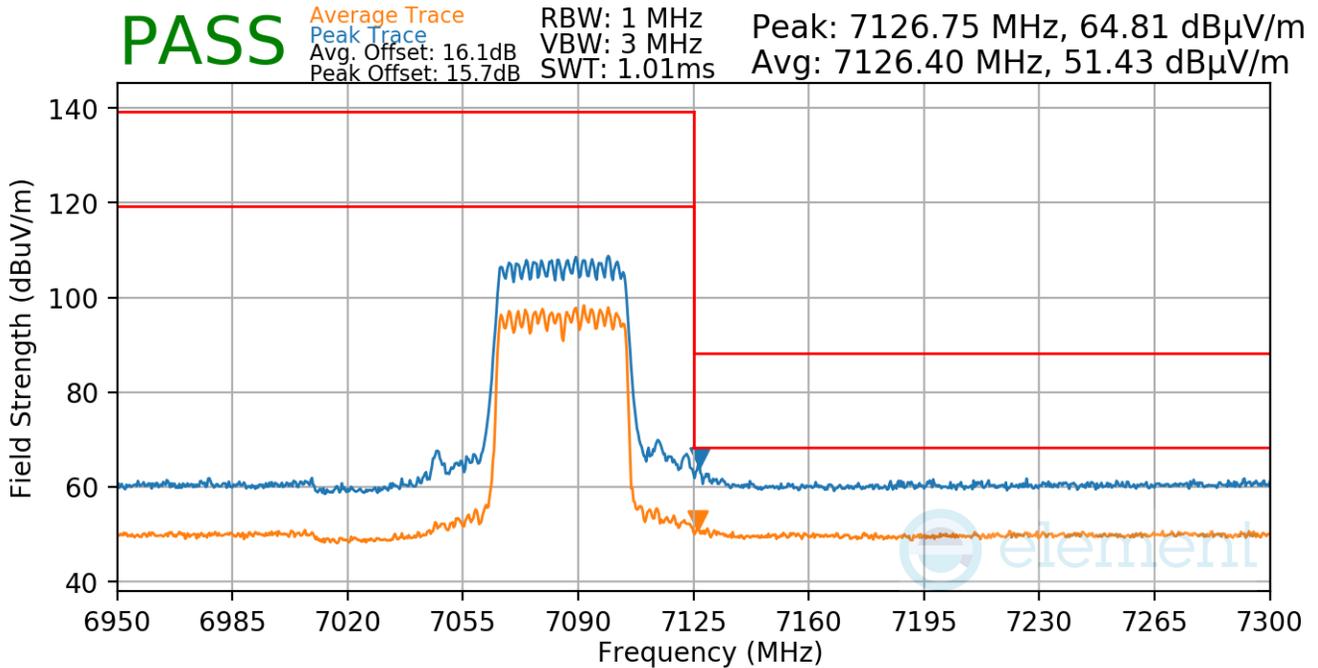


Plot 7-798. SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU484)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 303 of 323

7.7.14 SDM Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

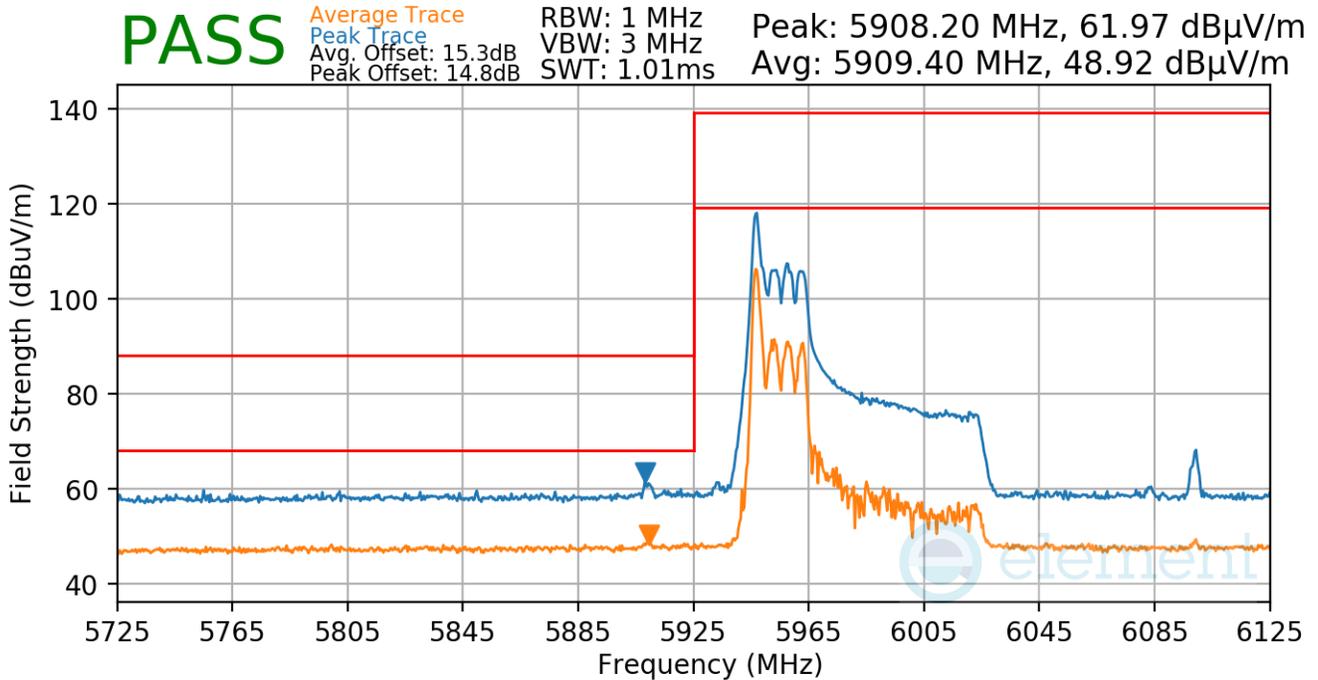

Plot 7-799. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 304 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7025MHz
 Channel: 215

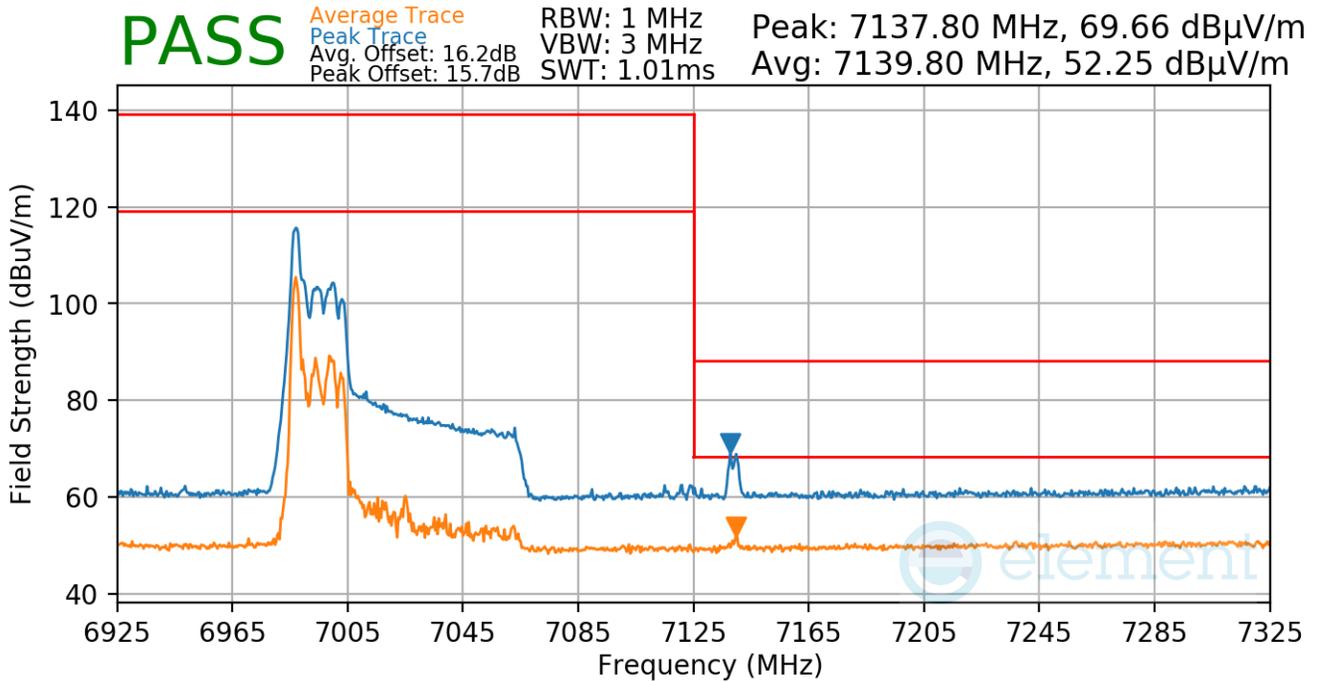


Plot 7-800. SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 305 of 323

RU996


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 5985MHz
 Channel: 7

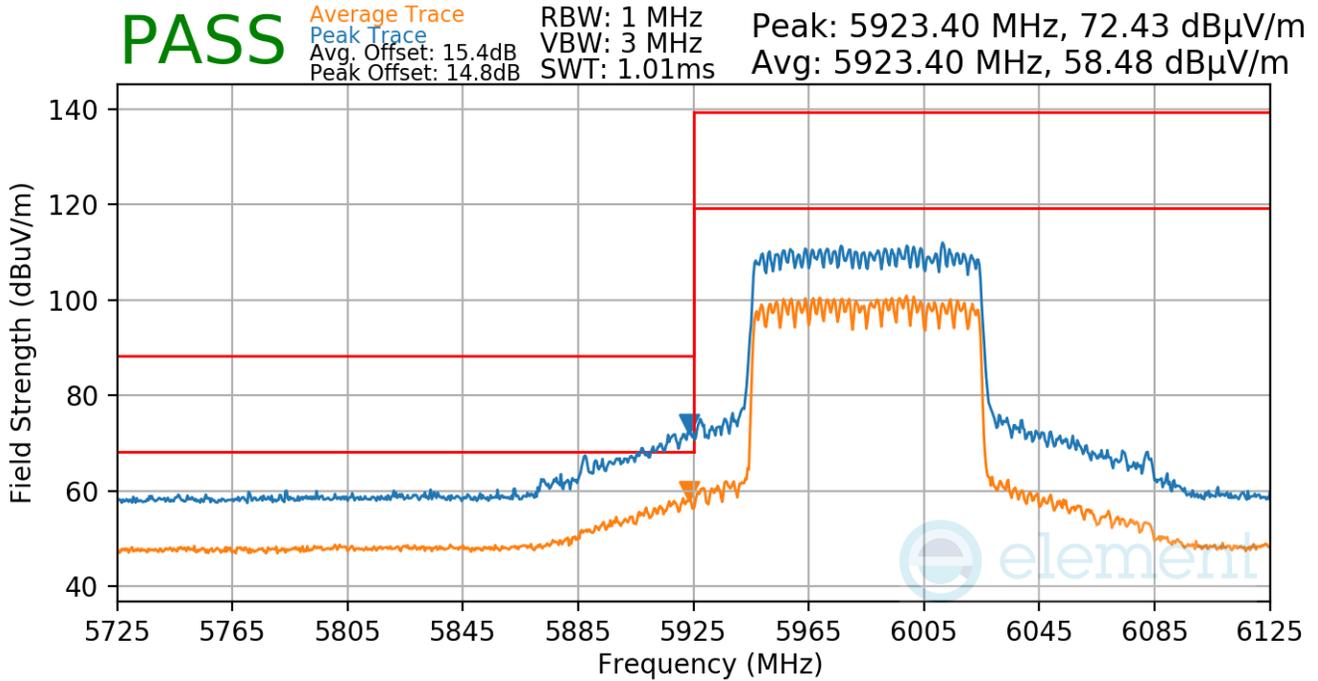

Plot 7-801. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 306 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7025MHz
 Channel: 215

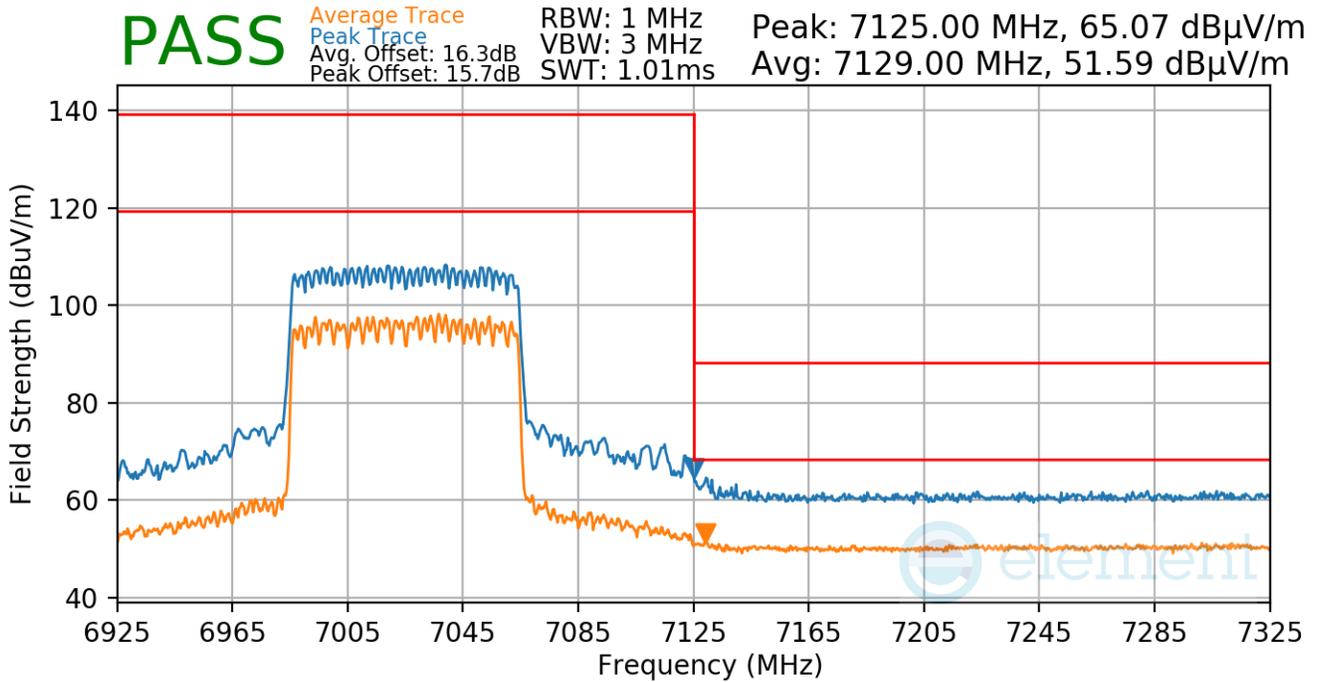


Plot 7-802. SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU996)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 307 of 323

7.7.15 SDM Radiated Band Edge Measurements (160MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

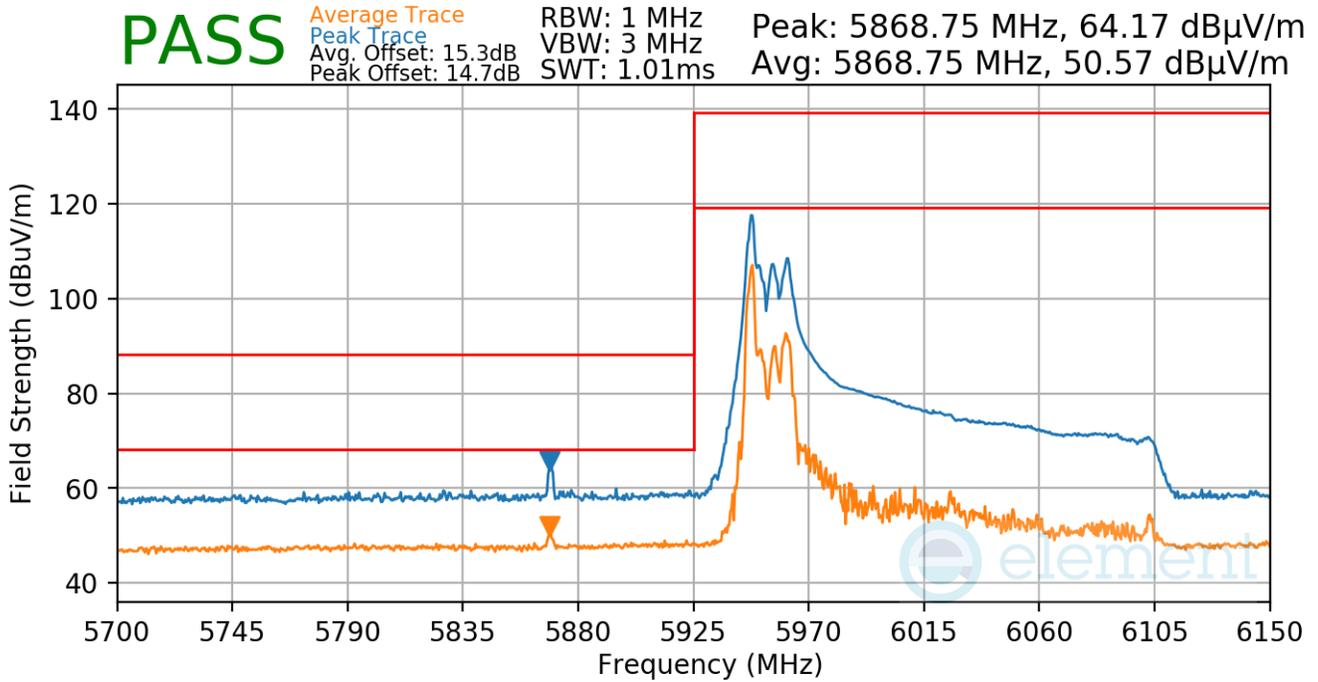

Plot 7-803. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 308 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

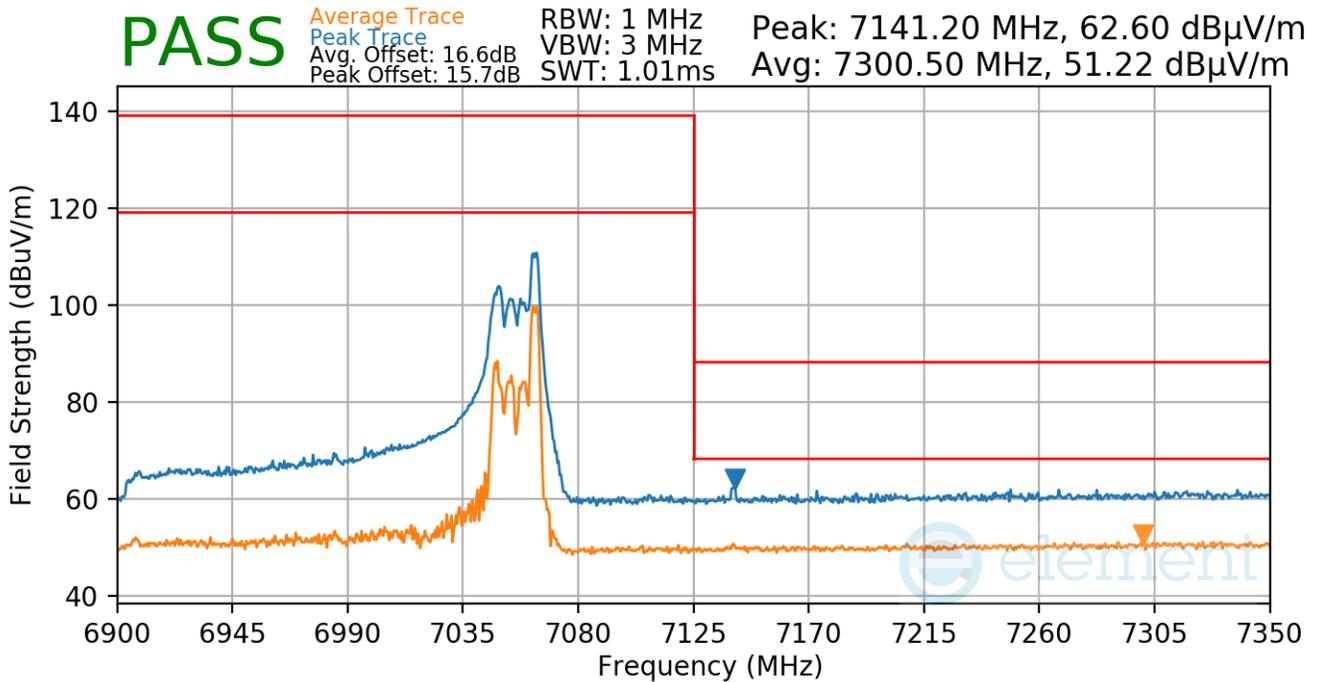


Plot 7-804. SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 309 of 323

RU996x2


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

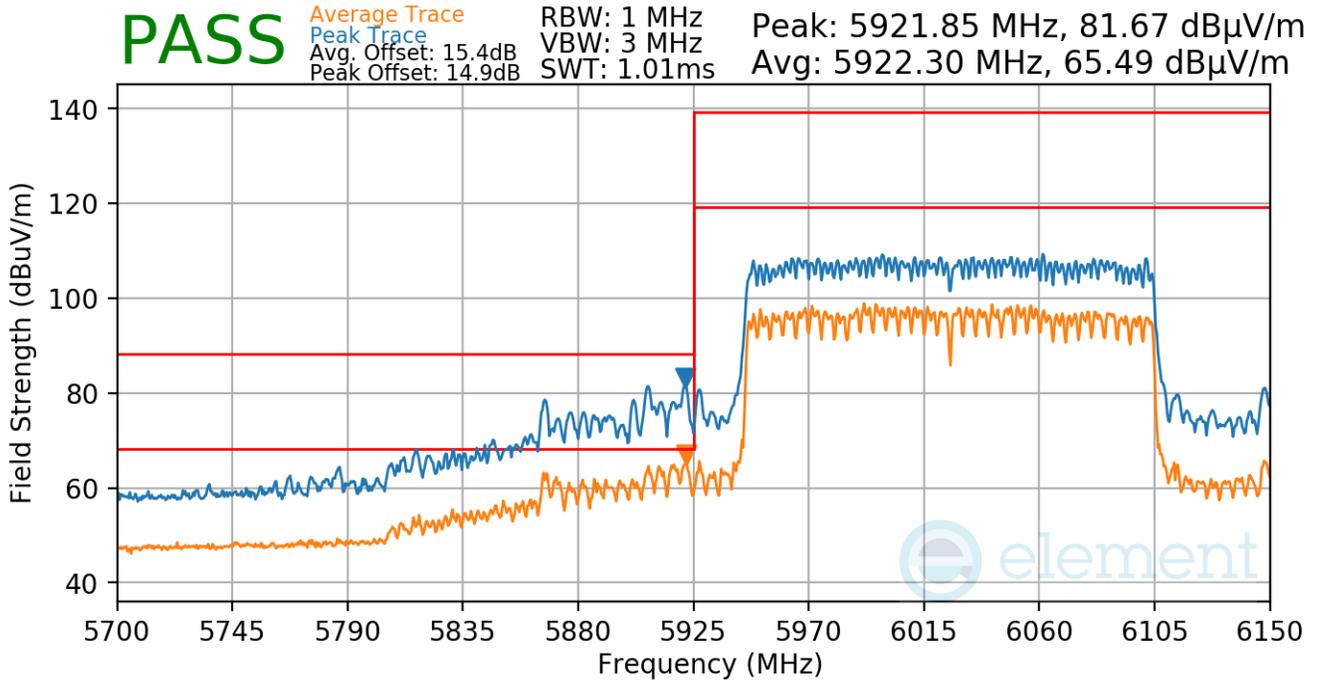

Plot 7-805. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996x2)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 310 of 323

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 6985MHz
 Channel: 207

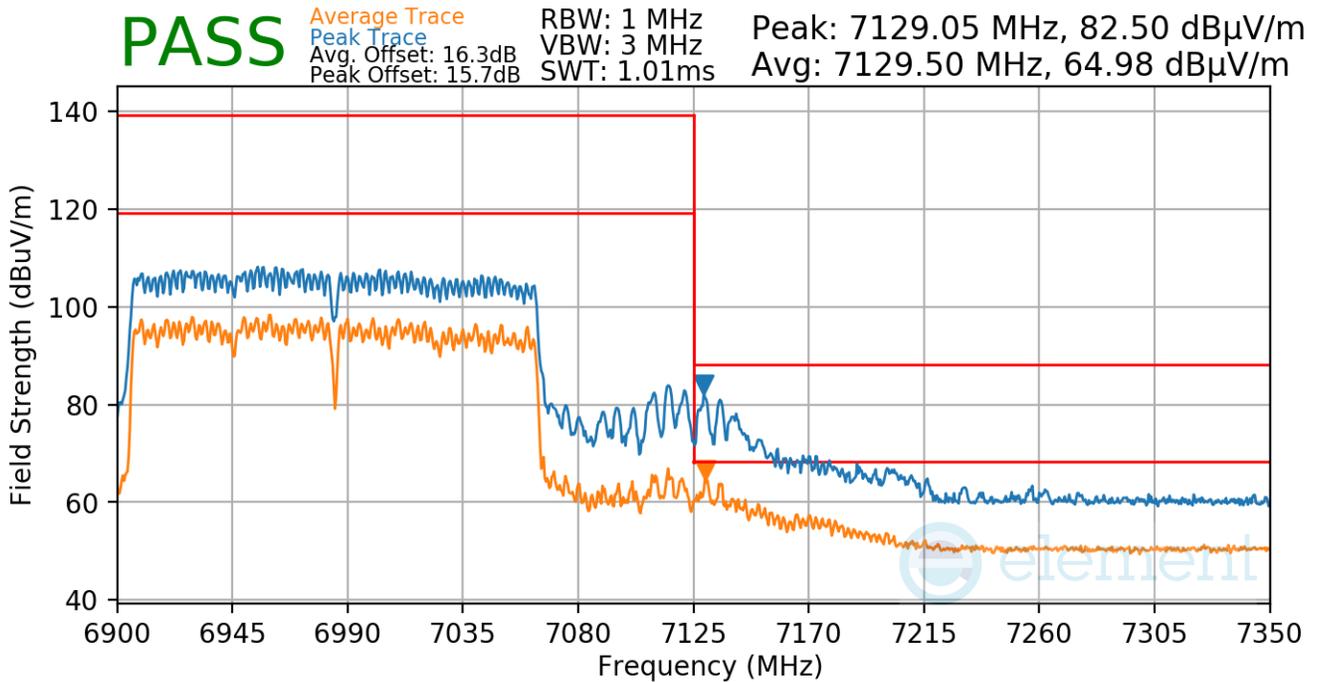

Plot 7-806. SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU996x2)

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 311 of 323

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-124 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-124. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

7. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
8. RBW = 120kHz (for emissions from 30MHz – 1GHz)
9. VBW = 300kHz
10. Detector = quasi-peak
11. Sweep time = auto couple
12. Trace mode = max hold
13. Trace was allowed to stabilize

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 312 of 323

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

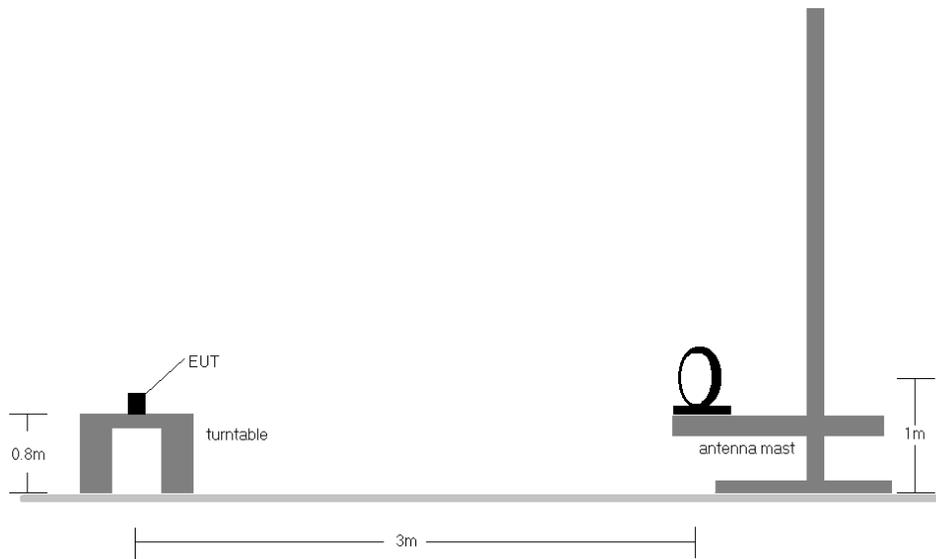


Figure 7-6. Radiated Test Setup < 30MHz

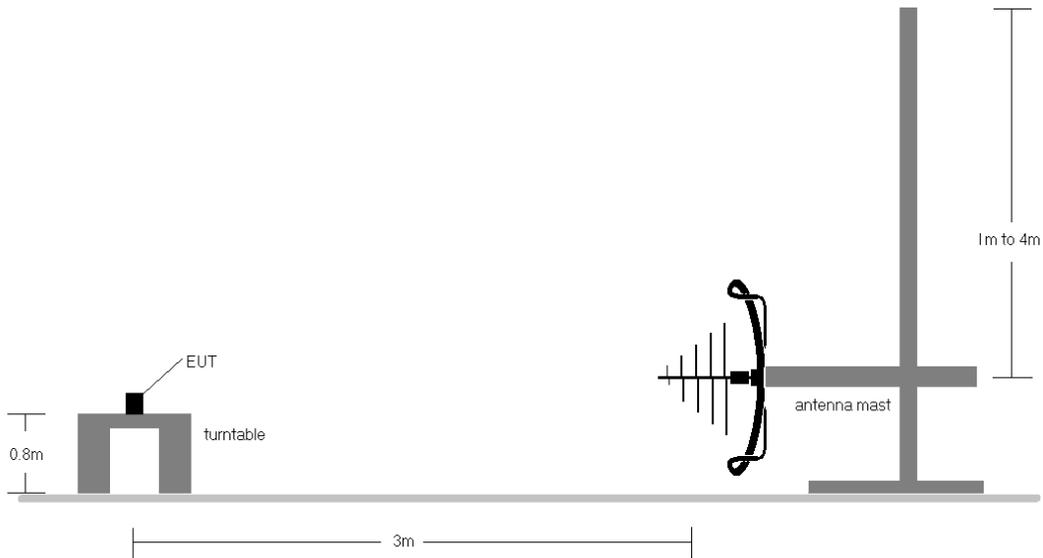


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA2436 IC: 579C-A2436	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device
<small>© 2022 ELEMENT</small>		<small>V 10.5 12/15/2021</small>

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-124.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$ - Preamp Gain $_{[dB]}$
- Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$

FCC ID: BCGA2436 IC: 579C-A2436	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 314 of 323

7.8.1 SDM Primary Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

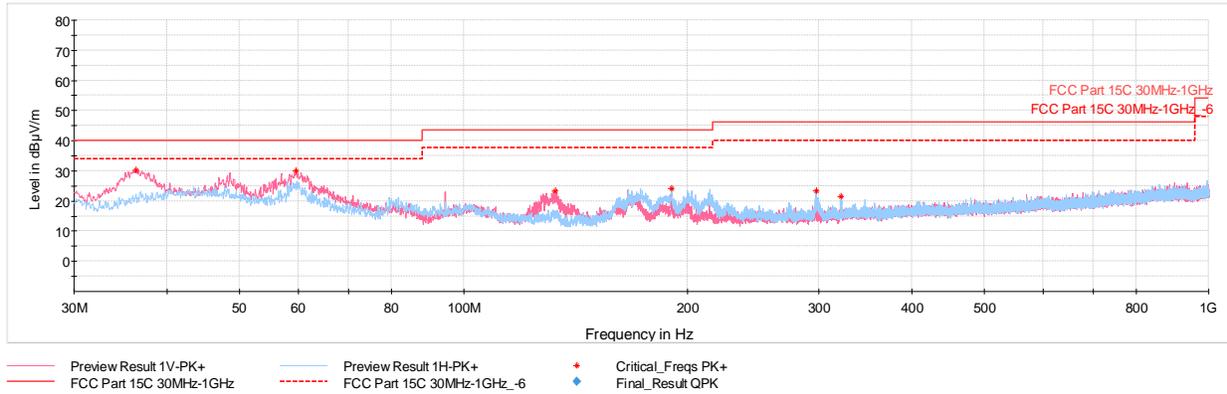


Plot 7-807. Radiated Spurious Emissions below 1GHz SDM (802.11ax – Ch.1 – RU26) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
36.31	Max Peak	V	100	233	-58.38	-18.38	30.24	40.00	-9.76
59.59	Max Peak	V	100	15	-60.10	-16.84	30.06	40.00	-9.94
132.77	Max Peak	V	100	15	-62.75	-20.91	23.34	43.52	-20.18
190.24	Max Peak	H	200	209	-64.37	-18.43	24.20	43.52	-19.32
297.57	Max Peak	H	100	136	-68.18	-15.36	23.46	46.02	-22.56
321.05	Max Peak	H	100	136	-70.84	-14.65	21.51	46.02	-24.51

Table 7-125. Radiated Limits Radiated Spurious Emissions below 1GHz SDM (802.11ax – Ch.1 – RU26) with AC/DC Adapter

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 315 of 323

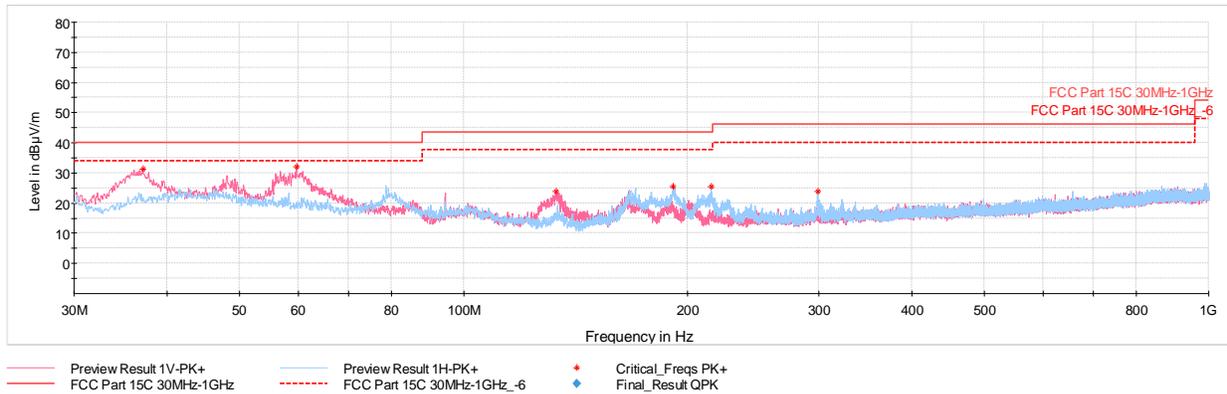

Plot 7-808. Radiated Spurious Emissions below 1GHz SDM (802.11ax – Ch.1 – RU242) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.13	Max Peak	V	100	159	-57.60	-18.19	31.21	40.00	-8.79
59.68	Max Peak	V	100	321	-58.15	-16.86	31.99	40.00	-8.01
133.16	Max Peak	V	100	12	-62.28	-20.89	23.83	43.52	-19.69
191.02	Max Peak	H	200	175	-63.25	-18.28	25.47	43.52	-18.05
214.88	Max Peak	H	100	183	-63.61	-17.88	25.51	43.52	-18.01
298.64	Max Peak	H	100	141	-67.74	-15.49	23.77	46.02	-22.25

Table 7-126. Radiated Spurious Emissions below 1GHz SDM (802.11ax – Ch.1 – RU242) with AC/DC Adapter

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 316 of 323

7.9 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-127. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 317 of 323

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


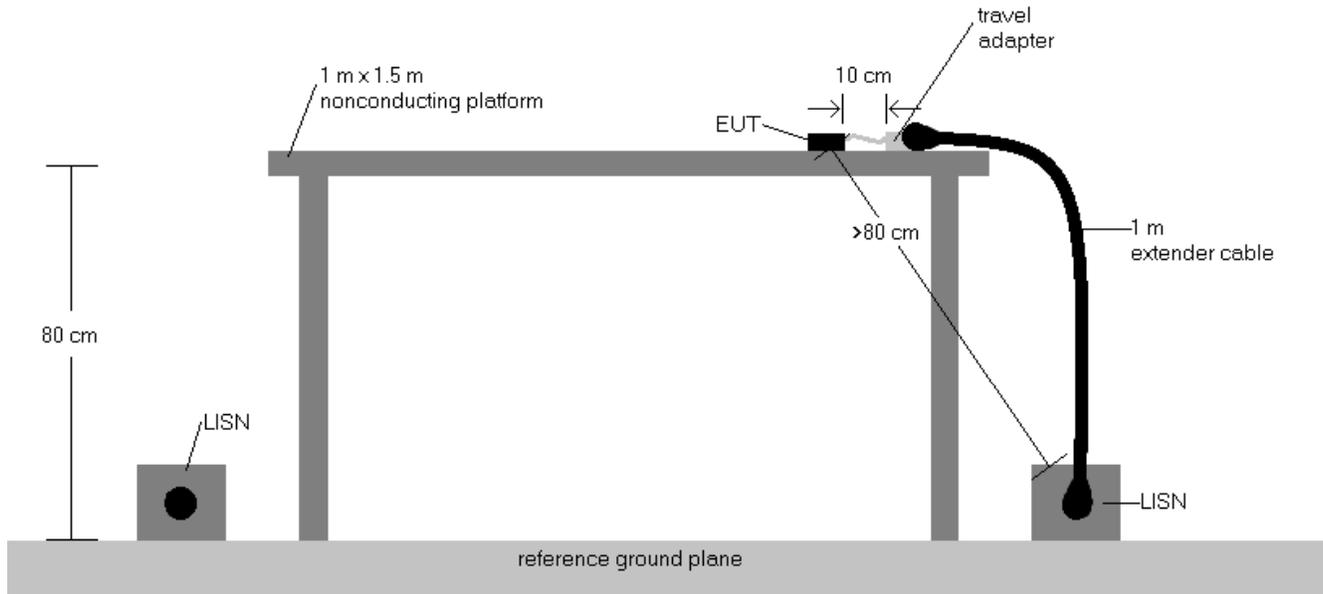


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA2436 IC: 579C-A2436	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device
© 2022 ELEMENT		Page 318 of 323

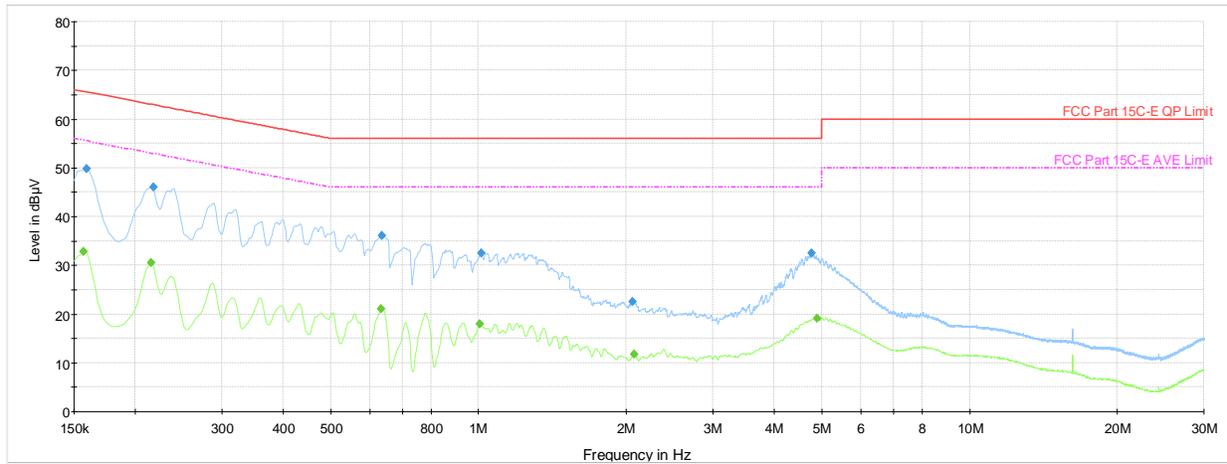


Plot 7-809. AC Line Conducted Plot with 11ax UNII Band 5 – RU26 – Ch.1 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.157	FINAL	---	32.89	55.63	-22.74	L1	GND
0.159	FINAL	49.8	---	65.52	-15.70	L1	GND
0.215	FINAL	---	30.55	53.00	-22.45	L1	GND
0.218	FINAL	46.0	---	62.91	-16.93	L1	GND
0.634	FINAL	---	21.04	46.00	-24.96	L1	GND
0.636	FINAL	36.0	---	56.00	-19.96	L1	GND
1.005	FINAL	---	18.00	46.00	-28.00	L1	GND
1.014	FINAL	32.5	---	56.00	-23.52	L1	GND
2.060	FINAL	22.5	---	56.00	-33.50	L1	GND
2.074	FINAL	---	11.70	46.00	-34.30	L1	GND
4.767	FINAL	32.5	---	56.00	-23.55	L1	GND
4.886	FINAL	---	19.07	46.00	-26.93	L1	GND

Table 7-128. AC Line Conducted Data with 11ax UNII Band 5 – RU26 – Ch.1 (L1) with AC/DC Adapter

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 319 of 323

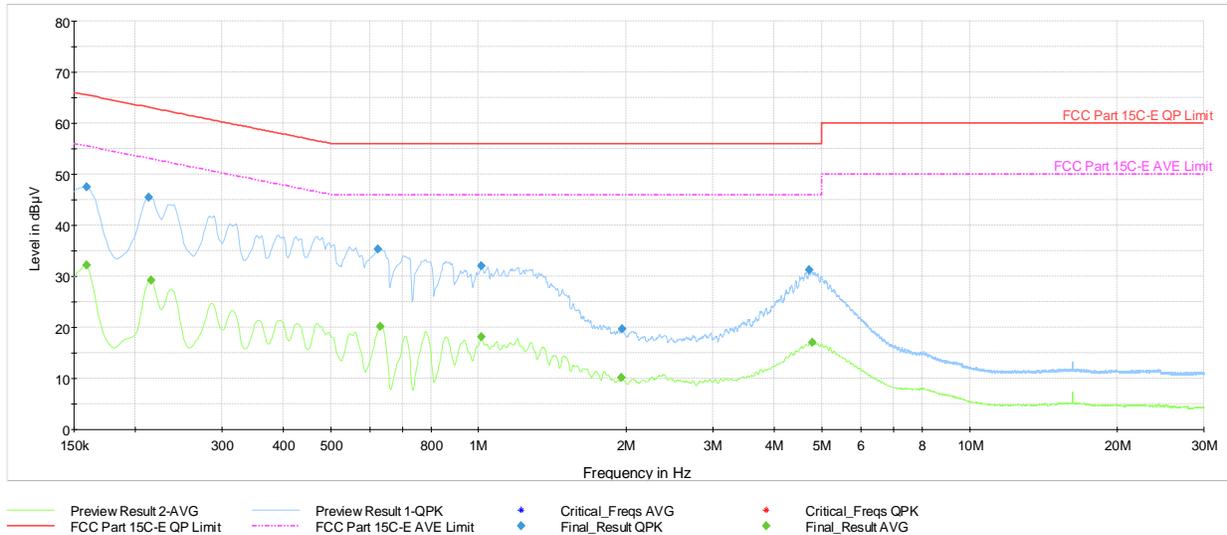


Plot 7-810. AC Line Conducted Plot with 11ax UNII Band 5 – RU26 – Ch.1 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	32.17	55.52	-23.34	N	GND
0.159	FINAL	47.6	---	65.52	-17.97	N	GND
0.213	FINAL	45.4	---	63.09	-17.66	N	GND
0.215	FINAL	---	29.29	53.00	-23.71	N	GND
0.625	FINAL	35.3	---	56.00	-20.71	N	GND
0.632	FINAL	---	20.15	46.00	-25.85	N	GND
1.014	FINAL	32.0	---	56.00	-24.01	N	GND
1.014	FINAL	---	18.17	46.00	-27.83	N	GND
1.952	FINAL	---	10.14	46.00	-35.86	N	GND
1.964	FINAL	19.6	---	56.00	-36.36	N	GND
4.713	FINAL	31.3	---	56.00	-24.68	N	GND
4.790	FINAL	---	16.96	46.00	-29.04	N	GND

Table 7-129. AC Line Conducted Data with 11ax UNII Band 5 – RU26 – Ch.1 (N) with AC/DC Adapter

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 320 of 323

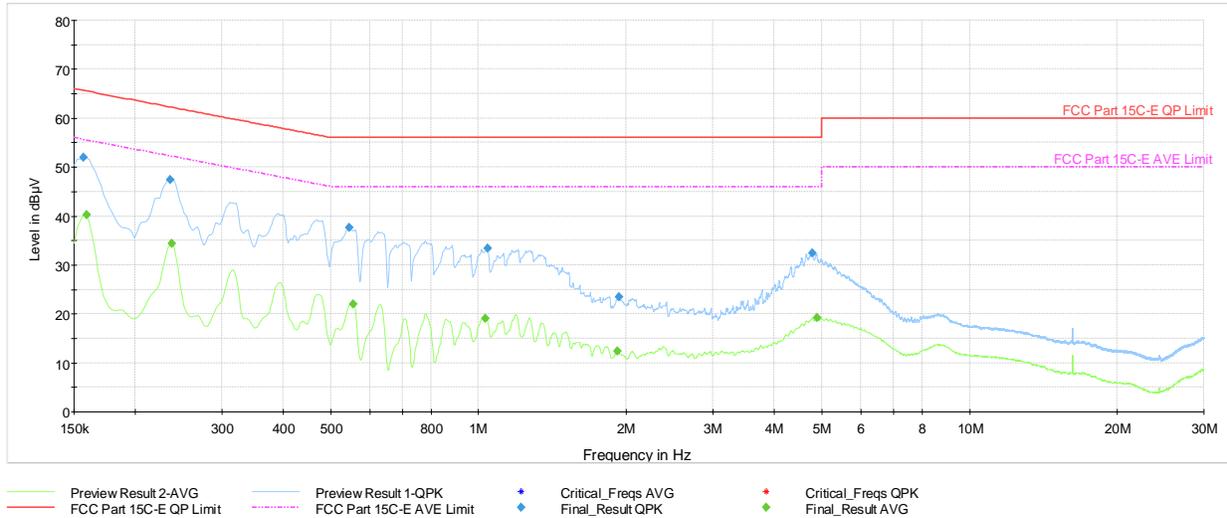


Plot 7-811. AC Line Conducted Plot with 11ax UNII Band 5 – RU242 – Ch.1 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.157	FINAL	52.0	---	65.63	-13.61	L1	GND
0.159	FINAL	---	40.21	55.52	-15.31	L1	GND
0.236	FINAL	47.5	---	62.25	-14.77	L1	GND
0.238	FINAL	---	34.31	52.17	-17.87	L1	GND
0.546	FINAL	37.7	---	56.00	-18.31	L1	GND
0.555	FINAL	---	22.03	46.00	-23.97	L1	GND
1.034	FINAL	---	19.08	46.00	-26.92	L1	GND
1.043	FINAL	33.5	---	56.00	-22.55	L1	GND
1.919	FINAL	---	12.32	46.00	-33.68	L1	GND
1.930	FINAL	23.4	---	56.00	-32.57	L1	GND
4.781	FINAL	32.5	---	56.00	-23.52	L1	GND
4.891	FINAL	---	19.24	46.00	-26.76	L1	GND

Table 7-130. AC Line Conducted Data with 11ax UNII Band 5 – RU242 – Ch.1 (L1) with AC/DC Adapter

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 321 of 323

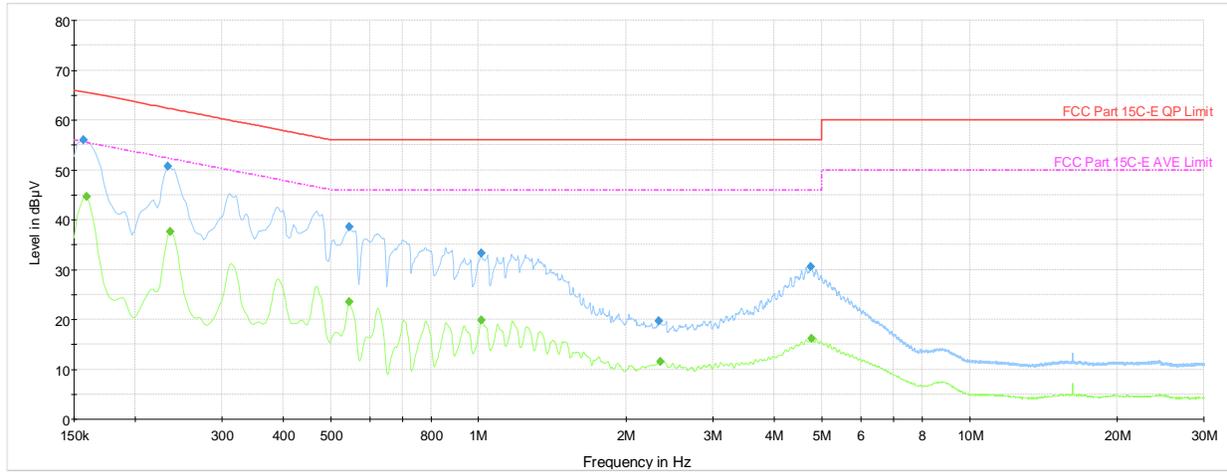

Plot 7-812. AC Line Conducted Plot with 11ax UNII Band 5 – RU242 – Ch.1 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.157	FINAL	55.9	---	65.63	-9.71	N	GND
0.159	FINAL	---	44.63	55.52	-10.89	N	GND
0.233	FINAL	50.8	---	62.33	-11.59	N	GND
0.236	FINAL	---	37.56	52.25	-14.69	N	GND
0.546	FINAL	---	23.47	46.00	-22.53	N	GND
0.546	FINAL	38.5	---	56.00	-17.46	N	GND
1.012	FINAL	33.3	---	56.00	-22.67	N	GND
1.012	FINAL	---	19.80	46.00	-26.20	N	GND
2.330	FINAL	19.7	---	56.00	-36.30	N	GND
2.351	FINAL	---	11.59	46.00	-34.41	N	GND
4.754	FINAL	30.5	---	56.00	-25.51	N	GND
4.765	FINAL	---	16.16	46.00	-29.84	N	GND

Table 7-131. AC Line Conducted Data with 11ax UNII Band 5 – RU242 – Ch.1 (N) with AC/DC Adapter

FCC ID: BCGA2436 IC: 579C-A2436		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 322 of 323

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2436** and **IC: 579C-A2436** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2436 IC: 579C-A2436	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090027-12-R1.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 323 of 323