



ELEMENT MATERIALS TECHNOLOGY

(Formerly PCTEST)

18855 Adams Court, Morgan Hill, CA 95037, USA
Tel. +1.410.290.6652 / Fax +1.410.290.6654
<http://www.element.com>



SAR EVALUATION REPORT

Applicant Name:
Apple Inc.
One Apple Park Way
Cupertino, CA 95014 USA

Date of Testing:
08/14/2022 – 08/26/2022
Test Site/Location:
Element, Morgan Hill, CA, USA
Document Serial No.:
1C2204080015-07.BCG

FCC ID: BCG-A2699

APPLICANT: APPLE, INC.

DUT Type: Wireless Earbuds
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: A2699

Equipment Class	Band & Mode	Tx Frequency	SAR	
			1g Head (W/kg)	1g Body-Worn (W/kg)
DSS/DTS	Bluetooth	2402 - 2480 MHz	0.69	0.94
NII	NB UNII-1	5157 - 5245 MHz	<0.1	1.19
NII	NB UNII-3	5731 - 5844 MHz	<0.1	0.65

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.6 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez
Executive Vice President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 1 of 24

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	INTRODUCTION	6
3	DOSIMETRIC ASSESSMENT	7
4	TEST CONFIGURATION POSITIONS.....	8
5	RF EXPOSURE LIMITS	9
6	FCC MEASUREMENT PROCEDURES.....	10
7	RF CONDUCTED POWERS.....	11
8	SYSTEM VERIFICATION.....	15
9	SAR DATA SUMMARY	17
10	SAR MEASUREMENT VARIABILITY	19
11	EQUIPMENT LIST.....	20
12	MEASUREMENT UNCERTAINTIES.....	21
13	CONCLUSION.....	22
14	REFERENCES	23
APPENDIX A:	SAR TEST PLOTS	
APPENDIX B:	SAR DIPOLE VERIFICATION PLOTS	
APPENDIX C:	SAR TISSUE SPECIFICATIONS	
APPENDIX D:	SAR SYSTEM VALIDATION	
APPENDIX E:	DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS	
APPENDIX F:	PROBE AND DIPOLE CALIBRATION CERTIFICATES	

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 2 of 24

REV 22.0
03/30/2022

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
Bluetooth	Data	2402 - 2480 MHz
NB UNII-1	Data	5157 - 5245 MHz
NB UNII-3	Data	5731 - 5844 MHz

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Power

Mode / Band	Duty Cycle	Modulated Average (dBm)	
		Maximum	Nominal
2.4 GHz Bluetooth BDR	34%	Maximum	12.50
		Nominal	11.50
2.4 GHz Bluetooth EDR	77%	Maximum	9.50
		Nominal	8.50
2.4 GHz Bluetooth HDR4/8	77%	Maximum	9.50
		Nominal	8.50
2.4 GHz Bluetooth HDRp4/8	100%*	Maximum	9.50
		Nominal	8.50
2.4 Bluetooth LE1M	100%*	Maximum	9.00
		Nominal	8.00

*Note: Per the manufacturer, test mode at a higher duty cycle was evaluated for a conservative exposure analysis.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 3 of 24

REV 22.0
03/30/2022

Mode / Band	Duty Cycle	Modulated Average (dBm)	
		Maximum	Nominal
NB UNII-1 BDR	34%	Maximum	10.00
		Nominal	9.00
NB UNII-1 HDR4/8	77%	Maximum	7.50
		Nominal	6.50
NB UNII-1 HDRp4/8	100%*	Maximum	7.50
		Nominal	6.50
NB UNII-1 LE2M	15%	Maximum	10.00
		Nominal	9.00

*Note: Per the manufacturer, test mode at a higher duty cycle was evaluated for a conservative exposure analysis.

Mode / Band	Duty Cycle	Modulated Average (dBm)	
		Maximum	Nominal
NB UNII-3 BDR	34%	Maximum	10.50
		Nominal	9.50
NB UNII-3 HDR4/8	77%	Maximum	7.50
		Nominal	6.50
NB UNII-3 HDRp4/8	100%*	Maximum	7.50
		Nominal	6.50
NB UNII-3 LE2M	15%	Maximum	13.50
		Nominal	12.50

*Note: Per the manufacturer, test mode at a higher duty cycle was evaluated for a conservative exposure analysis.

1.4 DUT Antenna Locations

Based on the expected use conditions, Head SAR was evaluated. Per manufacturer request, Body-Worn SAR was evaluated as an additional conservative SAR test condition. The antenna is located inside BCG-A2699 – which is a wireless Bluetooth earbud for the Left ear. A diagram showing the location of the device antenna can be found in Appendix E. More information about the configurations evaluated for SAR can be found in Section 4.2 and Section 4.3.

1.5 Simultaneous Transmission Capabilities

This Device does not support any Simultaneous transmission Scenarios.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 4 of 24

REV 22.0
03/30/2022

1.6 Guidance Applied

- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)

1.7 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 9.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 5 of 24

REV 22.0
03/30/2022

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996, and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 6 of 24

REV 22.0
03/30/2022

3 DOSIMETRIC ASSESSMENT

3.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface, and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the cDASY6 manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 3-1
Sample SAR Area Scan

Table 3-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x, y, z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 7 of 24

REV 22.0
03/30/2022

4 TEST CONFIGURATION POSITIONS

4.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

4.2 Positioning for Head

This device is a wireless Bluetooth earbud for the left ear which is designed to be used in the ear canal. The antenna is located inside the earbud. SAR was evaluated with a separation distance of 0 mm between the earbud (the ear tip facing the phantom) and the flat phantom. The phantom is filled with head tissue equivalent medium.

4.3 Body-Worn Exposure Conditions

Per manufacturer request, Body-Worn SAR was evaluated as an additional conservative SAR test condition for the left earbud. The DUT was evaluated with a separation distance of 0 mm between the back side of the earbud and the flat phantom. The phantom is filled with head tissue equivalent medium.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 8 of 24

REV 22.0
03/30/2022

5

RF EXPOSURE LIMITS

5.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e., as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 5-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population (W/kg) or (mW/g)</i>	CONTROLLED ENVIRONMENT <i>Occupational (W/kg) or (mW/g)</i>
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 9 of 24

REV 22.0
03/30/2022

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 10 of 24

REV 22.0
03/30/2022

7 RF CONDUCTED POWERS

7.1 Bluetooth Conducted Powers

**Table 7-1
Bluetooth Average RF Power**

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	HDRp4	1.0	0	9.10	8.128
2441	HDRp4	1.0	39	9.36	8.630
2480	HDRp4	1.0	78	9.47	8.851

**Table 7-2
NB UNII Average RF Power**

Type	Band	Channel	Frequency	Average
HDRp8	NB UNII-1	Low	5157	7.05
		Mid	5201	7.04
		High	5245	7.29
HDRp4	NB UNII-3	Low	5731	6.67
		Mid	5788	6.56
		High	5844	6.70

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 11 of 24


REV 22.0
03/30/2022

7.2 Bluetooth Duty Cycle

7.2.1

Maximum Bluetooth Transmission

Figure 7-1
2.4 GHz Bluetooth Transmission Plot

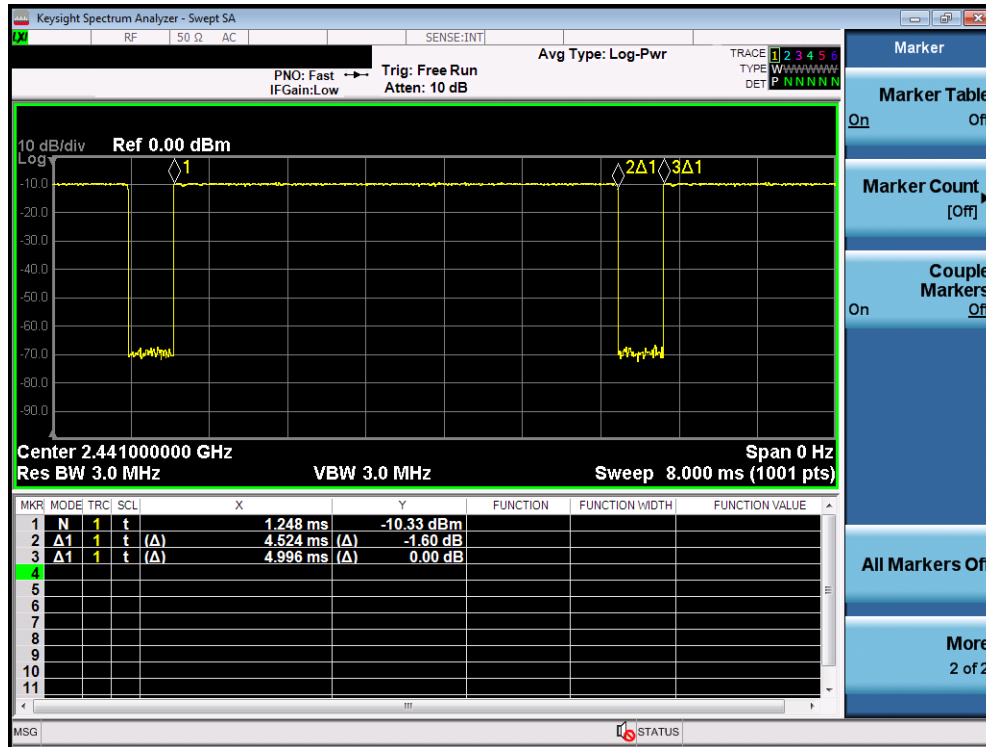


Equation 7-1
2.4 GHz Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{4.524 \text{ ms}}{4.996 \text{ ms}} * 100\% = 90.6\%$$

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 12 of 24

REV 22.0
03/30/2022

Figure 7-2
NB UNII-1 Bluetooth Transmission Plot

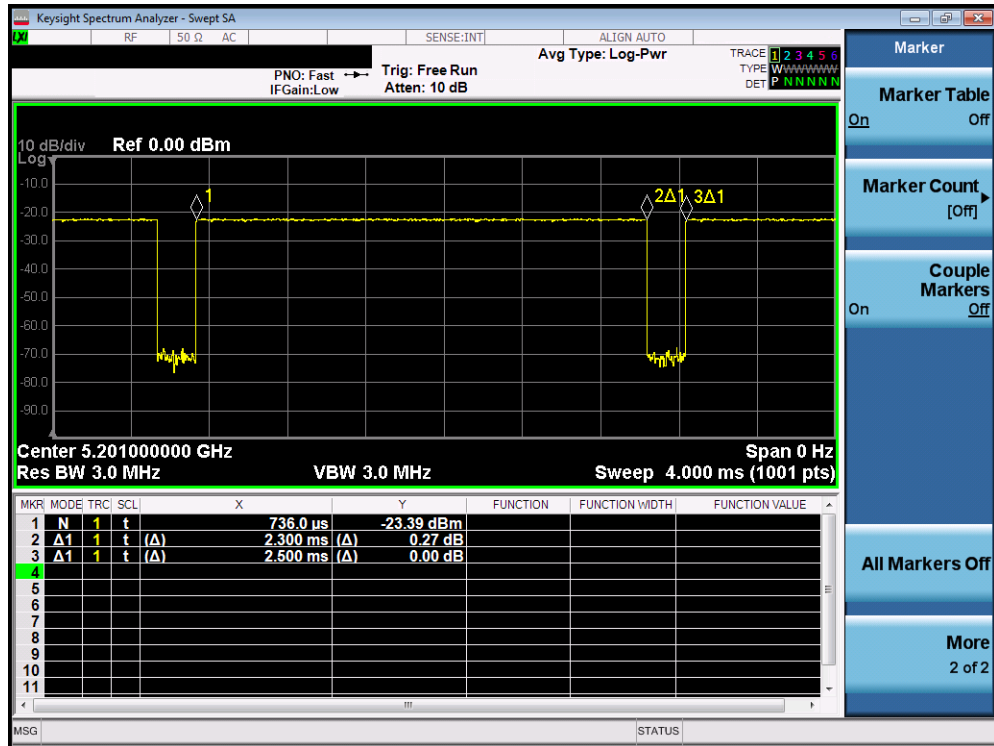


Equation 7-2
NB UNII-1 Bluetooth Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.300\ ms}{2.500\ ms} * 100\% = 92.0\%$$

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 13 of 24


REV 22.0
03/30/2022

**Figure 7-3
NB UNII-3 Bluetooth Transmission Plot**

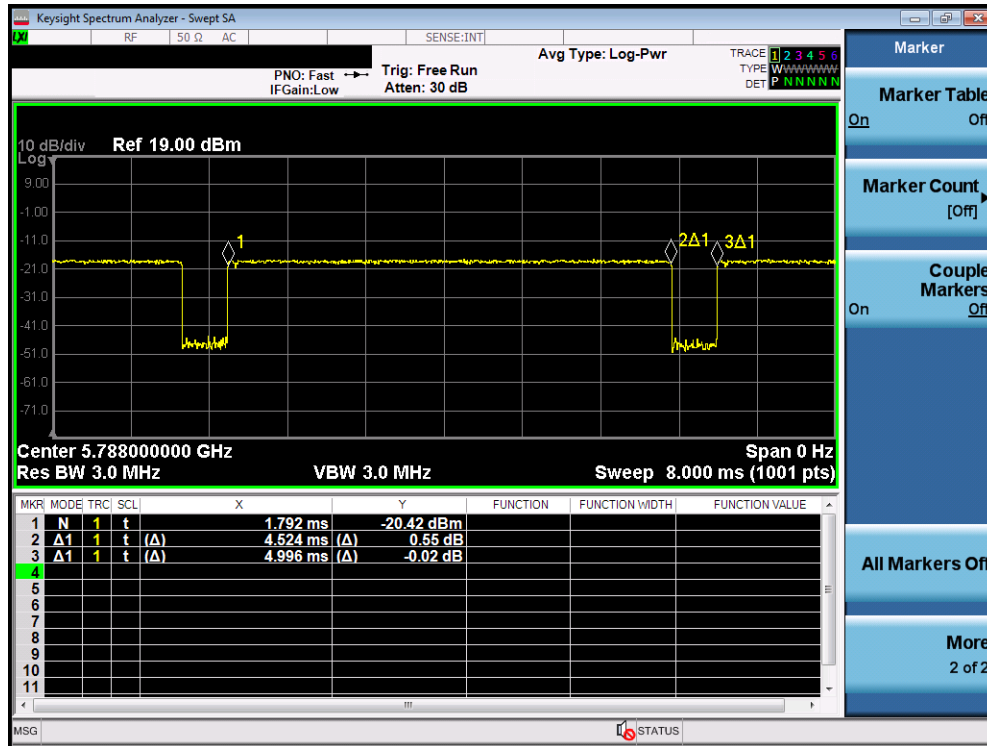

**Equation 7-3
NB UNII-3 Bluetooth Duty Cycle Calculation**

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{4.524\ ms}{4.996\ ms} * 100\% = 90.6\%$$

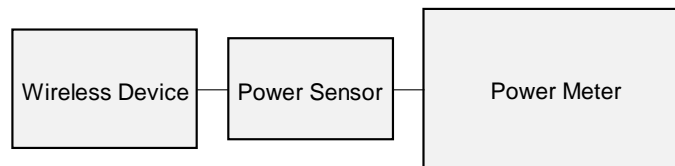

**Figure 7-4
Power Measurement Setup**

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 14 of 24

REV 22.0
03/30/2022

8.1 Tissue Verification

Table 8-1
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
08/14/2022	2450 Head	21.4	2300	1.740	38.921	1.670	39.500	4.73%	-1.44%
			2310	1.756	38.915	1.670	39.490	4.68%	-1.43%
			2320	1.763	38.895	1.687	39.460	4.51%	-1.43%
			2400	1.825	38.783	1.756	39.289	3.93%	-1.29%
			2450	1.865	38.683	1.800	39.200	3.61%	-1.32%
			2480	1.867	38.643	1.833	39.162	2.95%	-1.33%
			2500	1.901	38.604	1.855	39.136	2.48%	-1.36%
			2510	1.910	38.594	1.866	39.123	2.36%	-1.38%
			2535	1.931	38.543	1.893	39.092	2.01%	-1.40%
			2550	1.943	38.523	1.909	39.073	1.78%	-1.41%
			2560	1.951	38.510	1.920	39.060	1.61%	-1.41%
			2600	1.984	38.436	1.964	39.009	1.02%	-1.47%
			2650	2.024	38.341	2.018	38.945	0.30%	-1.56%
			2680	2.040	38.286	2.051	38.907	-0.10%	-1.60%
			2700	2.055	38.253	2.073	38.882	-0.39%	-1.62%
			08/18/2022	2450 Head	22.1	2300	1.733	38.473	1.670
2310	1.740	38.457				1.679	39.480	3.63%	-2.59%
2320	1.747	38.440				1.687	39.460	3.56%	-2.58%
2400	1.806	38.332				1.756	39.289	2.85%	-2.44%
2450	1.844	38.251				1.800	39.200	2.44%	-2.42%
2480	1.864	38.219				1.833	39.162	1.69%	-2.41%
2500	1.879	38.186				1.855	39.136	1.29%	-2.43%
2510	1.887	38.166				1.866	39.123	1.13%	-2.45%
2535	1.908	38.123				1.893	39.092	0.79%	-2.46%
2550	1.923	38.106				1.909	39.073	0.58%	-2.47%
2560	1.928	38.093				1.920	39.060	0.42%	-2.49%
2600	1.959	38.023				1.964	39.009	-0.31%	-2.53%
2650	2.001	37.928				2.018	38.945	-0.84%	-2.61%
2680	2.024	37.873				2.051	38.907	-1.32%	-2.66%
2700	2.040	37.831				2.073	38.882	-1.59%	-2.70%
08/26/2022	5200-5800 Head	21.1				5180	4.461	35.777	4.635
			5190	4.473	35.764	4.645	35.998	-3.70%	-0.65%
			5200	4.484	35.749	4.655	35.986	-3.67%	-0.66%
			5210	4.495	35.727	4.666	35.975	-3.66%	-0.69%
			5220	4.506	35.706	4.676	35.963	-3.64%	-0.71%
			5240	4.522	35.656	4.696	35.940	-3.71%	-0.79%
			5250	4.532	35.640	4.706	35.929	-3.70%	-0.80%
			5260	4.543	35.620	4.717	35.917	-3.69%	-0.83%
			5270	4.555	35.605	4.727	35.906	-3.64%	-0.84%
			5280	4.565	35.583	4.737	35.894	-3.63%	-0.87%
			5290	4.578	35.562	4.748	35.883	-3.58%	-0.89%
			5300	4.591	35.550	4.758	35.871	-3.51%	-0.89%
			5310	4.604	35.533	4.768	35.860	-3.44%	-0.91%
			5320	4.614	35.519	4.778	35.849	-3.43%	-0.92%
			5500	4.829	35.220	4.963	35.643	-2.70%	-1.19%
			5510	4.839	35.195	4.973	35.632	-2.69%	-1.23%
			5520	4.851	35.172	4.983	35.620	-2.65%	-1.26%
			5530	4.863	35.159	4.994	35.609	-2.62%	-1.26%
			5540	4.876	35.144	5.004	35.597	-2.56%	-1.27%
			5550	4.889	35.124	5.014	35.586	-2.49%	-1.30%
			5560	4.901	35.102	5.024	35.574	-2.45%	-1.33%
			5580	4.924	35.066	5.045	35.551	-2.40%	-1.36%
			5600	4.943	35.024	5.065	35.529	-2.41%	-1.42%
			5610	4.953	35.007	5.076	35.518	-2.42%	-1.44%
			5620	4.963	34.986	5.086	35.506	-2.42%	-1.46%
			5640	4.986	34.953	5.106	35.483	-2.35%	-1.49%
			5660	5.002	34.915	5.127	35.460	-2.44%	-1.54%
			5670	5.012	34.891	5.137	35.448	-2.43%	-1.57%
			5680	5.023	34.870	5.147	35.437	-2.41%	-1.58%
			5690	5.033	34.864	5.158	35.426	-2.42%	-1.59%
			5700	5.043	34.849	5.168	35.414	-2.42%	-1.60%
			5710	5.054	34.828	5.178	35.403	-2.39%	-1.62%
5720	5.062	34.803	5.188	35.391	-2.43%	-1.66%			
5745	5.086	34.768	5.214	35.363	-2.45%	-1.68%			
5750	5.095	34.762	5.219	35.357	-2.38%	-1.68%			
5755	5.102	34.758	5.224	35.351	-2.34%	-1.68%			
5765	5.113	34.745	5.234	35.340	-2.31%	-1.68%			
5775	5.121	34.726	5.245	35.329	-2.36%	-1.71%			
5785	5.130	34.714	5.255	35.317	-2.38%	-1.71%			
5795	5.144	34.701	5.265	35.305	-2.30%	-1.71%			
5800	5.151	34.693	5.270	35.300	-2.26%	-1.72%			
5805	5.151	34.693	5.270	35.300	-2.26%	-1.72%			
5805	5.158	34.680	5.275	35.294	-2.22%	-1.74%			
5825	5.178	34.636	5.296	35.271	-2.23%	-1.80%			
5835	5.191	34.627	5.305	35.230	-2.15%	-1.71%			
5845	5.207	34.613	5.315	35.210	-2.03%	-1.70%			
5855	5.219	34.608	5.325	35.197	-1.99%	-1.70%			
5865	5.230	34.588	5.336	35.190	-1.99%	-1.71%			
5865	5.230	34.588	5.336	35.190	-1.99%	-1.71%			
5865	5.230	34.588	5.336	35.190	-1.99%	-1.71%			
5865	5.230	34.588	5.336	35.190	-1.99%	-1.71%			
5875	5.241	34.587	5.347	35.183	-1.98%	-1.69%			
5885	5.254	34.574	5.357	35.177	-1.92%	-1.71%			
5905	5.284	34.521	5.379	35.163	-1.77%	-1.83%			

The above measured tissue parameters were used in the cDASY6 software. The cDASY6 software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.


FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 15 of 24

8.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix D.

**Table 8-2
System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	Measured SAR1g (W/kg)	1W Target SAR1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation1g (%)
AM4	2450	HEAD	08/14/2022	21.9	21.0	0.10	921	3837	5.430	54.20	54.300	0.18%
AM4	2450	HEAD	08/18/2022	24.1	21.5	0.10	921	3837	5.300	54.20	53.000	-2.21%
AM9	5250	HEAD	08/26/2022	20.9	20.2	0.05	1123	7638	4.020	80.50	80.400	-0.12%
AM9	5600	HEAD	08/26/2022	20.9	20.2	0.05	1123	7638	4.380	83.70	87.600	4.66%
AM9	5750	HEAD	08/26/2022	20.9	20.2	0.05	1123	7638	4.210	80.50	84.200	4.60%

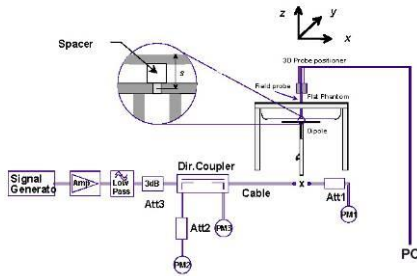

**Figure 8-1
System Verification Setup Diagram**



**Figure 8-2
System Verification Setup Photo**

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 16 of 24

REV 22.0
03/30/2022

9.1 Standalone Head SAR Data

Table 9-1
Bluetooth Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Earbud	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2402	0	Bluetooth	FHSS	9.50	9.10	-0.01	0 mm	HM6HV14Y18JQ	1	Left	90.6	0.568	1.096	1.104	0.687	A1
2441	39	Bluetooth	FHSS	9.50	9.36	-0.04	0 mm	HM6HV14Y18JQ	1	Left	90.6	0.505	1.033	1.104	0.576	
2480	78	Bluetooth	FHSS	9.50	9.47	0.02	0 mm	HM6HV14Y18JQ	1	Left	90.6	0.546	1.007	1.104	0.607	
5157	Low	NB UNII 1	FHSS	7.50	7.05	0.09	0 mm	HM6HV0Y418JQ	1	Left	92.0	0.038	1.109	1.087	0.046	
5201	Mid	NB UNII 1	FHSS	7.50	7.04	-0.17	0 mm	HM6HV0Y418JQ	1	Left	92.0	0.047	1.112	1.087	0.057	A2
5245	High	NB UNII 1	FHSS	7.50	7.29	0.01	0 mm	HM6HV0Y418JQ	1	Left	92.0	0.042	1.050	1.087	0.048	
5731	Low	NB UNII 3	FHSS	7.50	6.67	0.13	0 mm	HM6HV0Y418JQ	1	Left	90.6	0.021	1.211	1.104	0.028	
5788	Mid	NB UNII 3	FHSS	7.50	6.56	0.08	0 mm	HM6HV0Y418JQ	1	Left	90.6	0.022	1.242	1.104	0.030	
5844	High	NB UNII 3	FHSS	7.50	6.70	0.06	0 mm	HM6HV0Y418JQ	1	Left	90.6	0.019	1.202	1.104	0.025	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

Note: The reported SAR was scaled to 100% transmission duty factor.

9.2 Standalone Body-Worn SAR Data

Table 9-2
Bluetooth Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Earbud	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)			(W/kg)	
2402	0	Bluetooth	FHSS	9.50	9.10	0.03	0 mm	HM6HV14Y18JQ	1	Left	Back	90.6	0.779	1.096	1.104	0.943	
2441	39	Bluetooth	FHSS	9.50	9.36	0.01	0 mm	HM6HV14Y18JQ	1	Left	Back	90.6	0.800	1.033	1.104	0.912	
2480	78	Bluetooth	FHSS	9.50	9.47	-0.02	0 mm	HM6HV14Y18JQ	1	Left	Back	90.6	0.812	1.007	1.104	0.903	A3
2480	78	Bluetooth	FHSS	9.50	9.47	-0.06	0 mm	HM6HV14Y18JQ	1	Left	Back	90.6	0.801	1.007	1.104	0.890	
5157	Low	NB UNII 1	FHSS	7.50	7.05	0.01	0 mm	HM6HV0Y418JQ	1	Left	Back	92.0	0.962	1.109	1.087	1.160	
5201	Mid	NB UNII 1	FHSS	7.50	7.04	0.00	0 mm	HM6HV0Y418JQ	1	Left	Back	92.0	0.971	1.112	1.087	1.174	
5245	High	NB UNII 1	FHSS	7.50	7.29	0.01	0 mm	HM6HV0Y418JQ	1	Left	Back	92.0	1.040	1.050	1.087	1.187	A4
5731	Low	NB UNII 3	FHSS	7.50	6.67	-0.09	0 mm	HM6HV0Y418JQ	1	Left	Back	90.6	0.484	1.211	1.104	0.647	
5788	Mid	NB UNII 3	FHSS	7.50	6.56	-0.06	0 mm	HM6HV0Y418JQ	1	Left	Back	90.6	0.412	1.242	1.104	0.565	
5844	High	NB UNII 3	FHSS	7.50	6.70	0.01	0 mm	HM6HV0Y418JQ	1	Left	Back	90.6	0.406	1.202	1.104	0.539	
5245	High	NB UNII 1	FHSS	7.50	7.29	-0.04	0 mm	HM6HV0Y418JQ	1	Left	Back	92.0	1.020	1.050	1.087	1.164	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: The reported SAR was scaled to 100% transmission duty factor.
Blue entries represent variability measurement.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 17 of 24

9.3 SAR Test Notes

General Notes:

1. Batteries are fully charged at the beginning of the SAR measurements.
2. Liquid tissue depth was at least 15.0 cm for all frequencies.
3. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units.
4. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
5. To demonstrate compliance for Head and Body-worn, SAR testing was performed on a flat phantom filled with head tissue equivalent medium.
6. Per manufacturer request, Body-Worn SAR was additionally evaluated as a conservative SAR test condition for the left earbud (BCG-A2699).
7. "Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 10 for variability analysis.
8. The orange highlights throughout the report represents the highest scaled SAR per Equipment Class.

Bluetooth Notes

1. Bluetooth SAR was evaluated with a test mode with hopping disabled with DH5 operation. The reported SAR was scaled to the 100% transmission duty factor to determine compliance for a more conservative exposure analysis. See section 7.2 for the time domain plot and calculation for the duty factor of the device.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 18 of 24

REV 22.0
03/30/2022

10 SAR MEASUREMENT VARIABILITY

10.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 10-1
Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Data Rate (Mbps)	Earbud	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2450	2480.00	78	Bluetooth	FHSS	1.00	Left	0 mm	0.812	0.801	1.01	N/A	N/A	N/A	N/A
5250	5245.00	High	NB UNII 1	FHSS	1.00	Left	0 mm	1.040	1.020	1.02	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

10.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 19 of 24

REV 22.0
03/30/2022

11 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4440A	PSA Series Spectrum Analyzer	3/22/2022	Annual	3/22/2023	MY46186272
Agilent	N5182A	MXG Vector Signal Generator	1/12/2022	Annual	1/12/2023	MY47420837
Agilent	N9020A	MXA Signal Analyzer	3/22/2022	Annual	3/22/2023	MY50200571
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343971
Anritsu	MA24106A	USB Power Sensor	9/21/2021	Annual	9/21/2022	2018527
Anritsu	MA24106A	USB Power Sensor	9/21/2021	Annual	9/21/2022	1827527
Anritsu	MA2411B	Pulse Power Sensor	3/2/2022	Annual	3/2/2023	1126066
Anritsu	ML2495A	Power Meter	3/17/2022	Annual	3/17/2023	941001
Anritsu	ML2496A	Power Meter	3/31/2022	Annual	3/31/2023	1138001
Control Company	4353	Long Stem Thermometer	10/28/2020	Biennial	10/28/2022	200670623
Control Company	4353	Long Stem Thermometer	10/28/2020	Biennial	10/28/2022	200670633
Control Company	4353	Long Stem Thermometer	10/28/2020	Biennial	10/28/2022	200670635
Control Company	4040	Therm./ Clock/ Humidity Monitor	3/12/2021	Biennial	3/12/2023	210202151
Control Company	4040	Therm./ Clock/ Humidity Monitor	2/19/2021	Biennial	2/19/2023	210114805
HEWLETT PACKARD	8753E	Network Analyzer	12/30/2021	Annual	12/30/2022	US38161081
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	E4438C	Vector Signal Generator	10/15/2021	Annual	10/15/2022	MY45092078
MCL	BW-N10W5+	10dB Attenuator	CBT	N/A	CBT	1611
MCL	BW-N3W5+	3dB Attenuator	CBT	N/A	CBT	1812
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	ZHDC-16-63-S+	50-6000MHz Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	12/21/2021	Biennial	12/21/2023	N/A
Seekonk	NC-100	Torque Wrench	9/24/2020	Biennial	9/24/2022	22216
SPEAG	D2450V2	2450 MHz SAR Dipole	11/9/2021	Annual	11/9/2022	921
SPEAG	D5GHzV2	5 GHz SAR Dipole	3/22/2022	Annual	3/22/2023	1123
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/13/2022	Annual	1/13/2023	793
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/21/2022	Annual	3/21/2023	1408
SPEAG	EX3DV4	SAR Probe	1/19/2022	Annual	1/19/2023	3837
SPEAG	EX3DV4	SAR Probe	3/22/2022	Annual	3/22/2023	7638
SPEAG	MAIA	Modulation and Audio Interference Analyzer	CBT	N/A	CBT	1237
SPEAG	MAIA	Modulation and Audio Interference Analyzer	CBT	N/A	CBT	1243
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	10/7/2021	Annual	10/7/2022	1045

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler, or filter were connected to a calibrated source (i.e., a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 20 of 24

REV 22.0
03/30/2022

12

MEASUREMENT UNCERTAINTIES

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS						12.2	12.0	191
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2						24.4	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCG-A2699	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud		Page 21 of 24

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

13 CONCLUSION

13.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g., ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g., age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 22 of 24

REV 22.0
03/30/2022

14 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 23 of 24

REV 22.0
03/30/2022

- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.

FCC ID: BCG-A2699	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2204080015-07.BCG	DUT Type: Wireless Earbud	Page 24 of 24

REV 22.0
03/30/2022