




Plot 7-67. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS2)

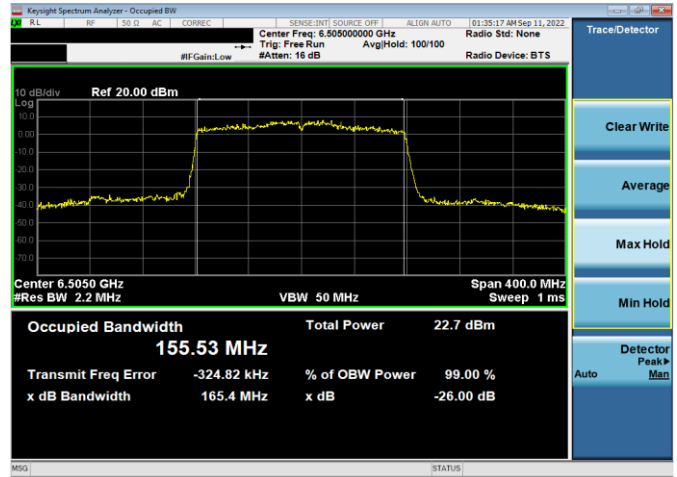


Plot 7-70. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS2)

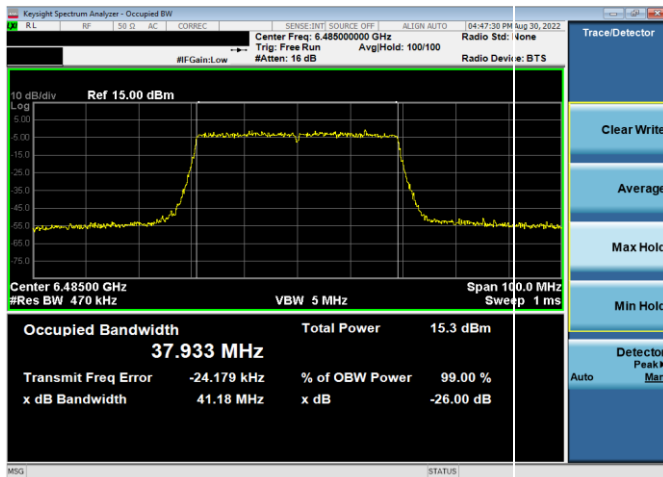

Plot 7-68. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS2)

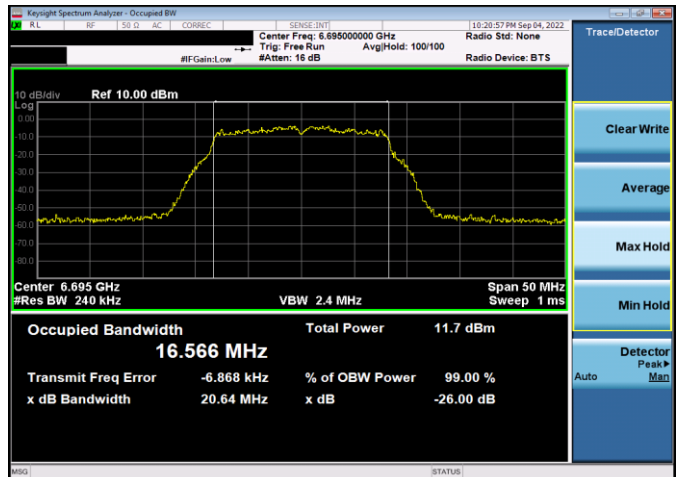

Plot 7-71. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 7) – Ch. 149, 12Mbps)

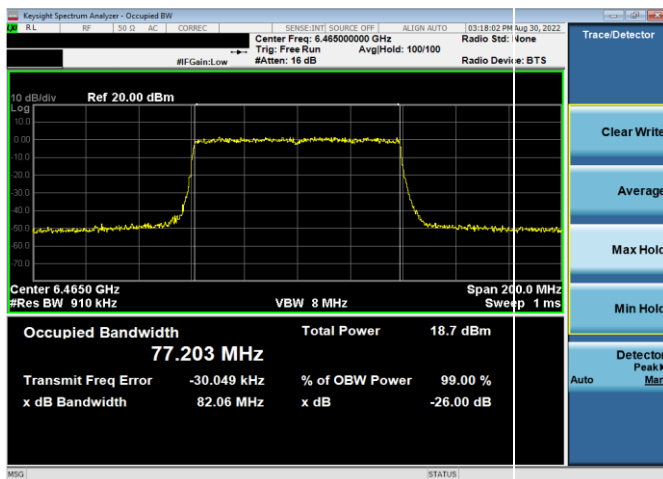


Plot 7-69. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS2)




Plot 7-72. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS2)


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 37 of 280

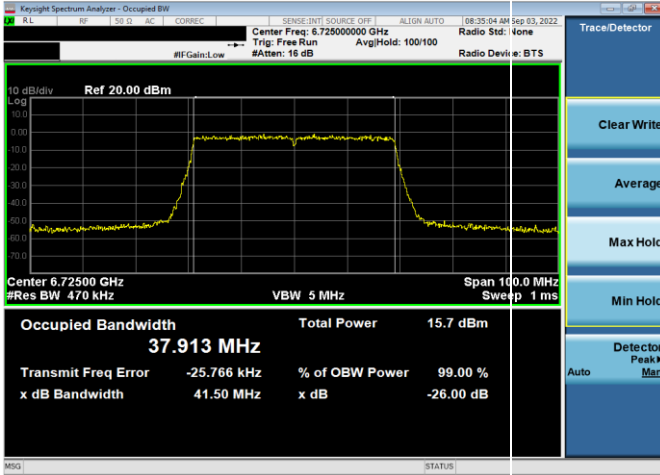


Plot 7-73. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS2)

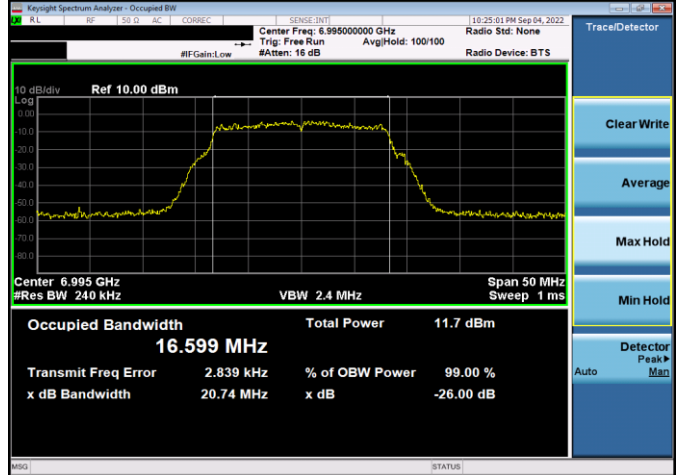


Plot 7-76. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 8) – Ch. 209, 12Mbps)

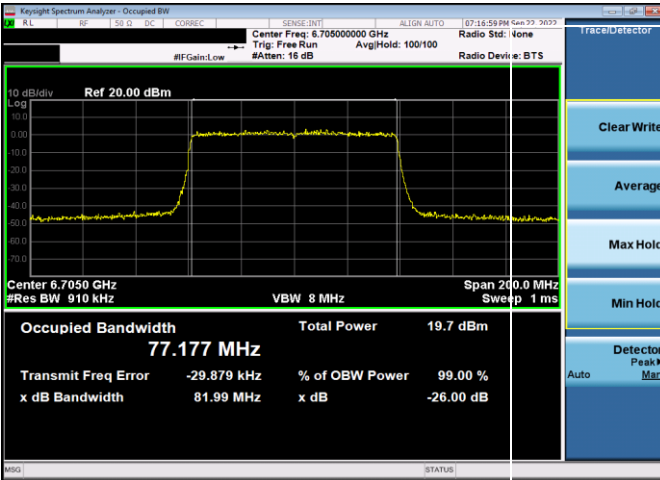


Plot 7-74. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS2)

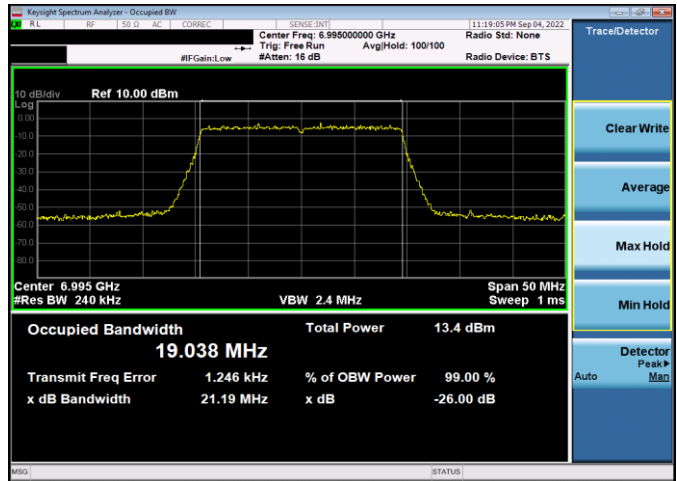

Plot 7-77. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS2)

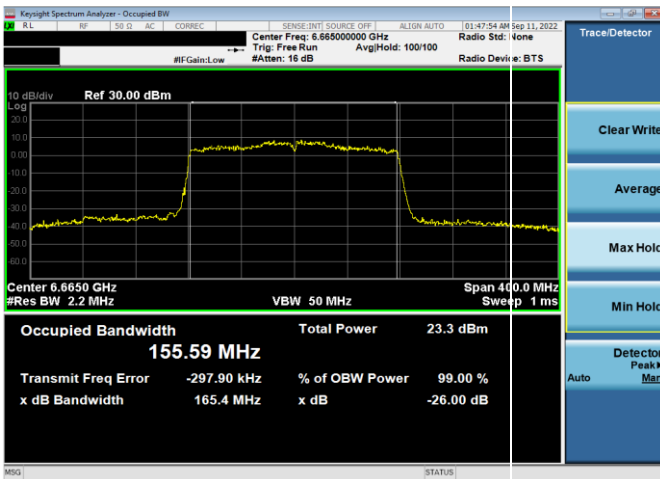


Plot 7-75. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS2)

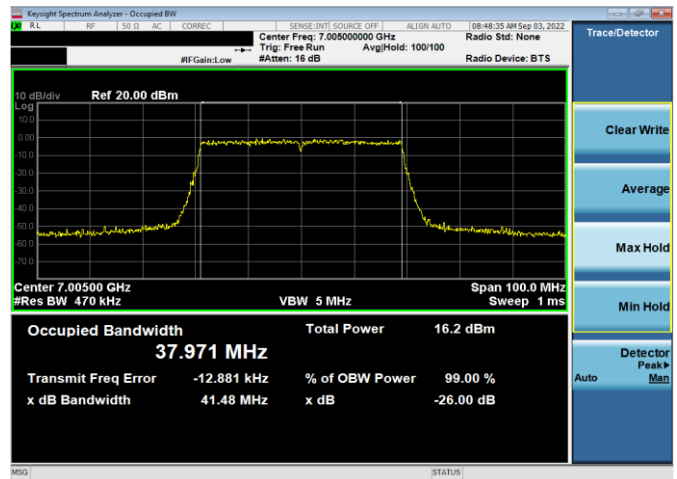


Plot 7-78. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS2)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 38 of 280

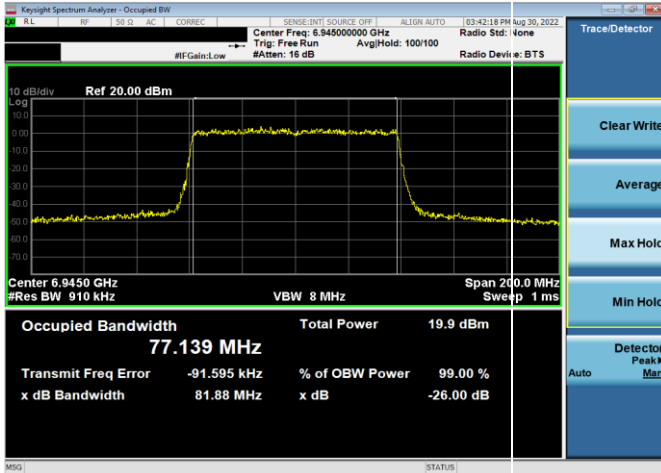


Plot 7-79. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS2)

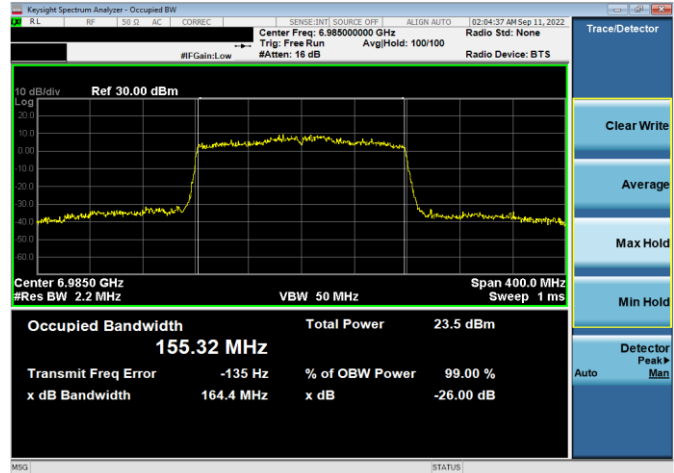


Plot 7-80. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS2)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 39 of 280


Mid Data Rate

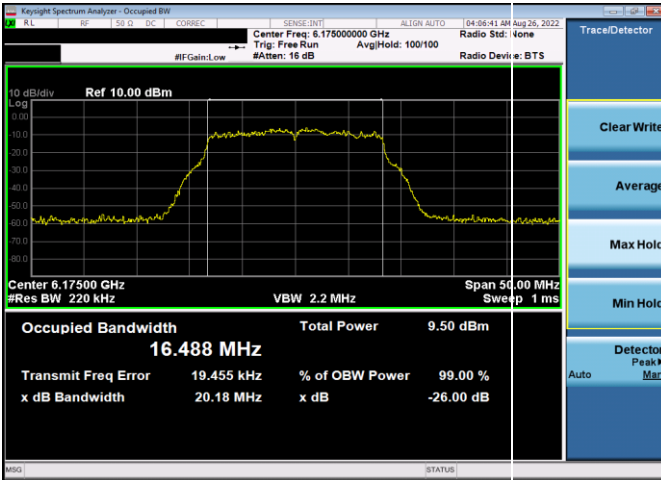


Plot 7-81. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 5) – Ch. 45, 24Mbps)

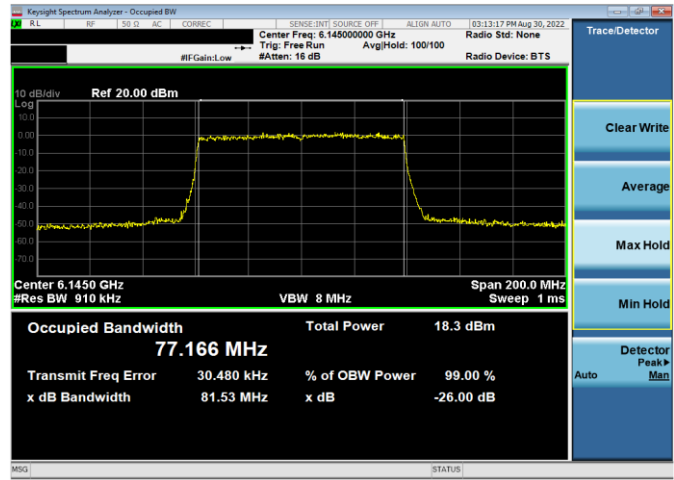


Plot 7-84. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS4)

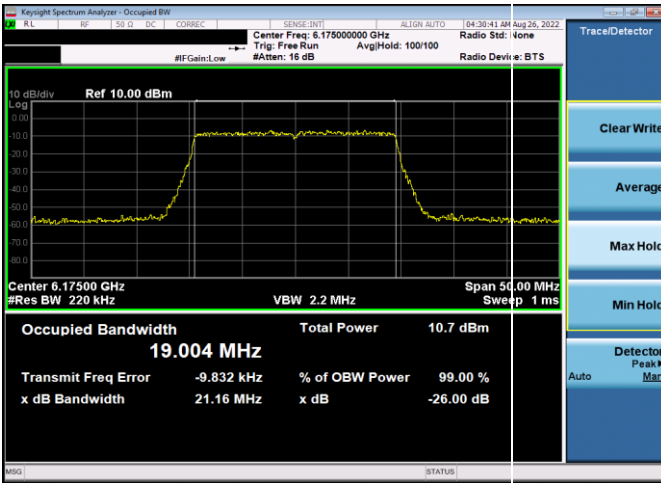


Plot 7-82. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS4)

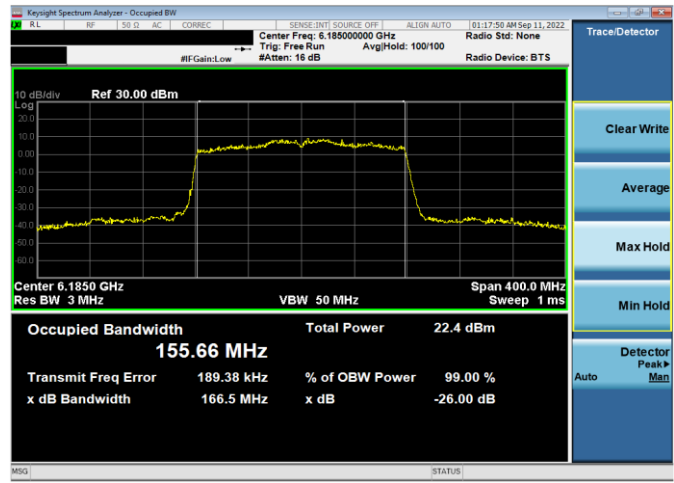

Plot 7-85. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS4)

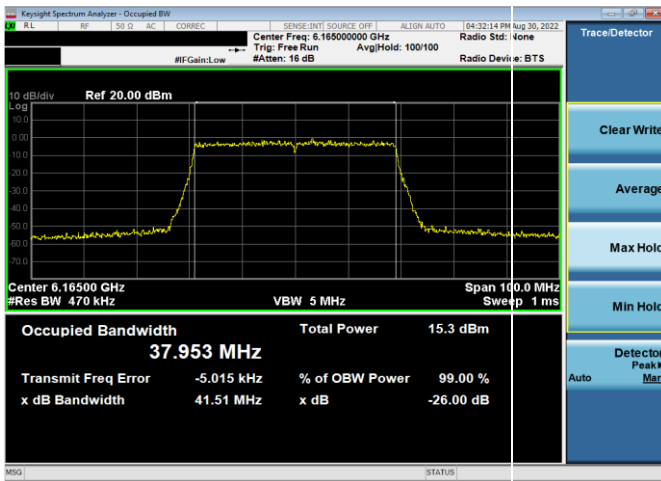


Plot 7-83. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS4)

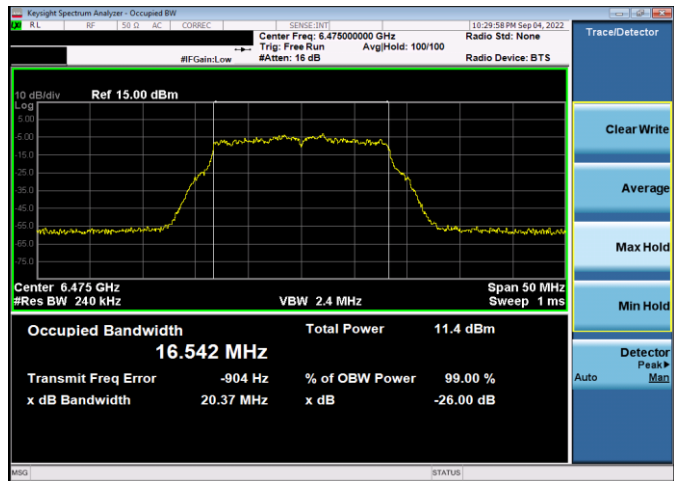


Plot 7-86. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 6) – Ch. 105, 24Mbps)


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 40 of 280

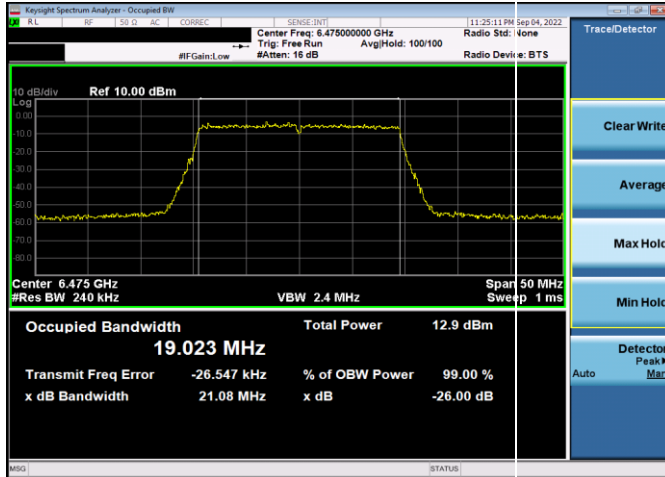


Plot 7-87. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS4)

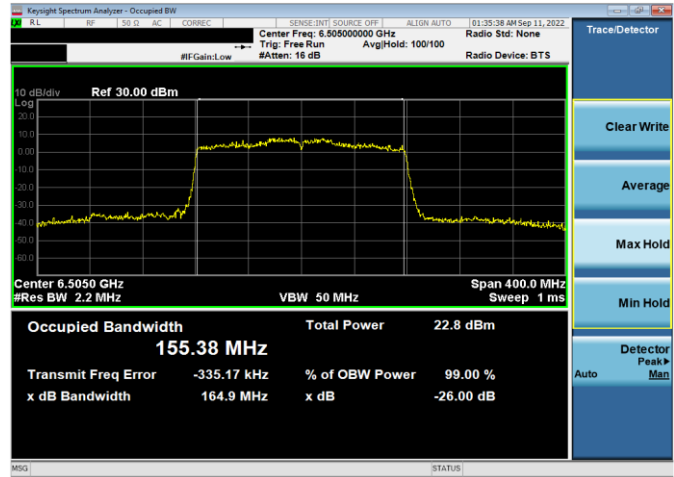


Plot 7-90. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS4)

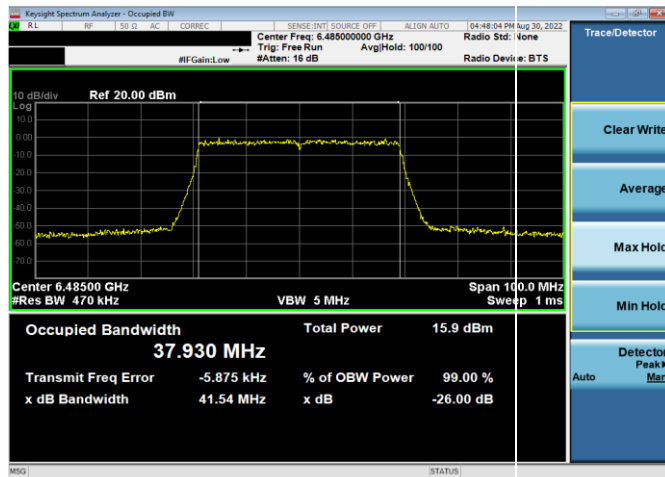


Plot 7-88. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS4)

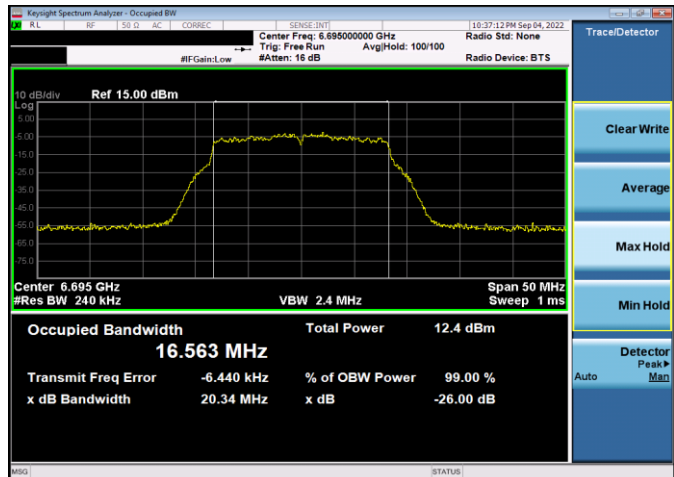

Plot 7-91. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 7) – Ch. 149, 24Mbps)

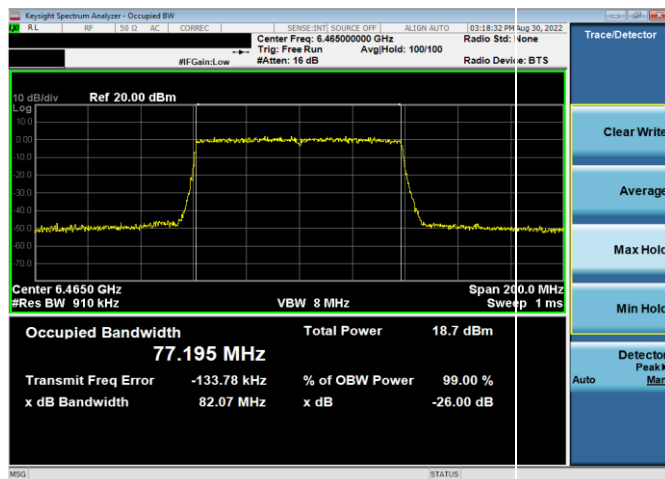


Plot 7-89. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS4)

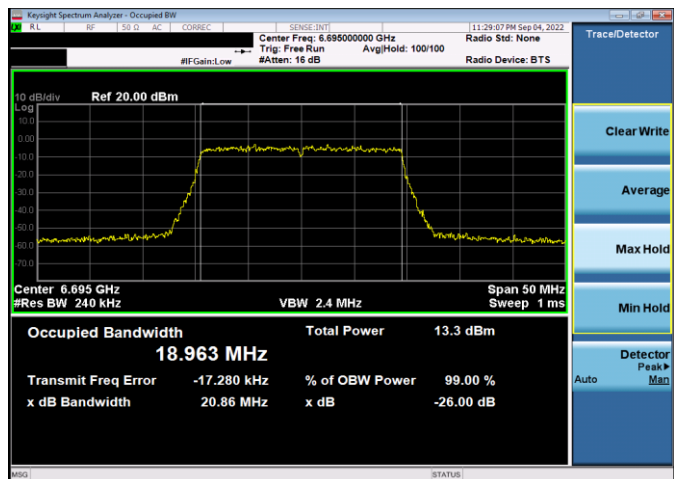


Plot 7-92. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS4)


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 41 of 280

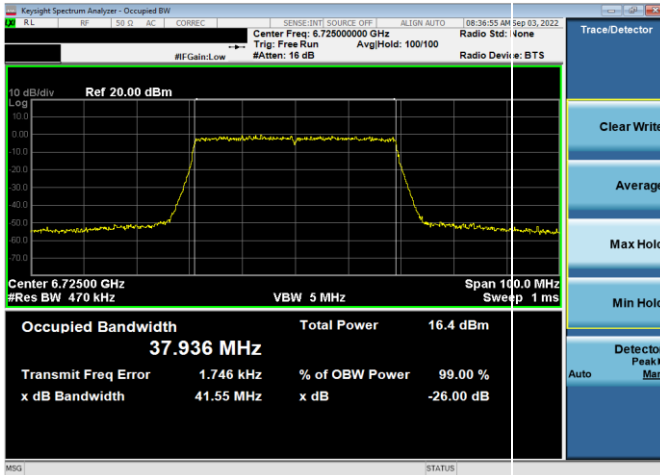


Plot 7-93. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS4)

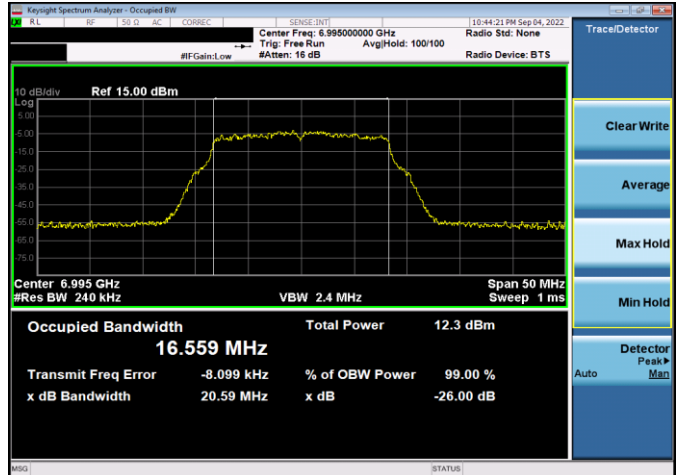


Plot 7-96. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 8) – Ch. 209, 24Mbps)

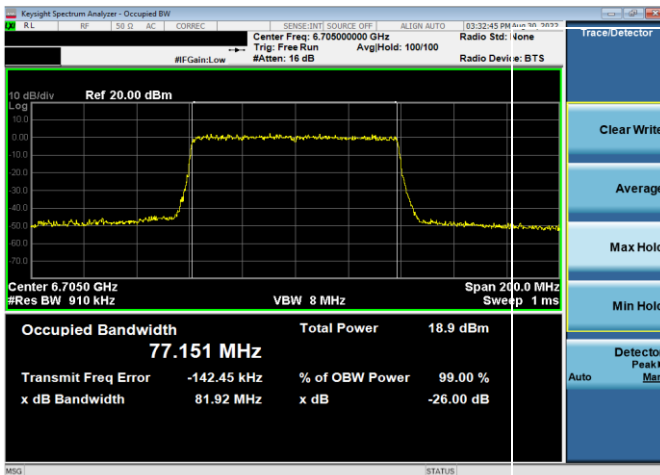


Plot 7-94. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS4)

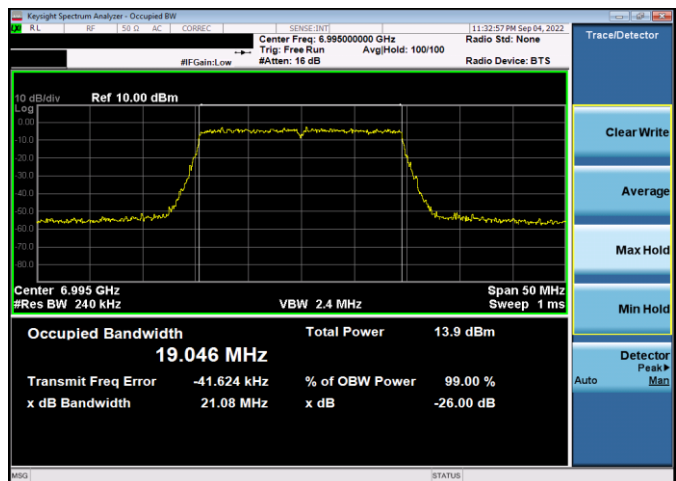

Plot 7-97. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS4)

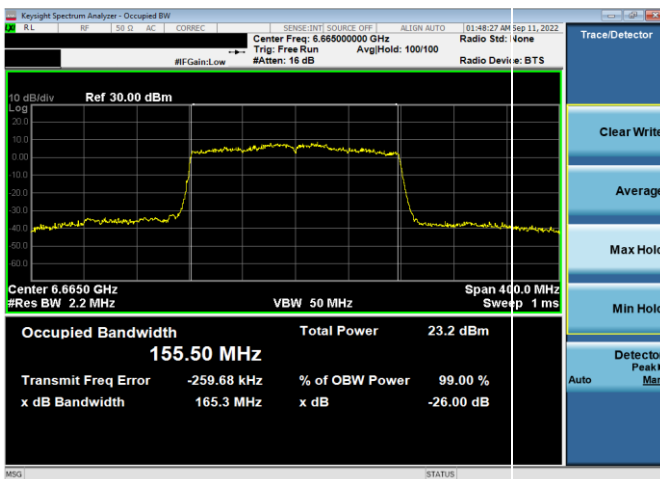


Plot 7-95. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS4)

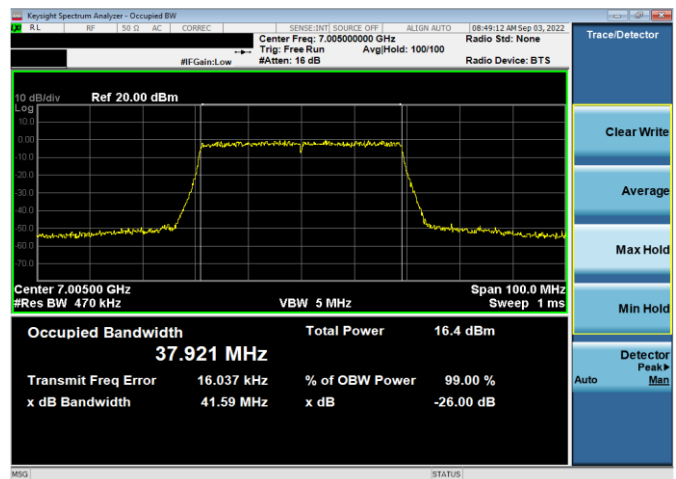


Plot 7-98. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS4)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 42 of 280

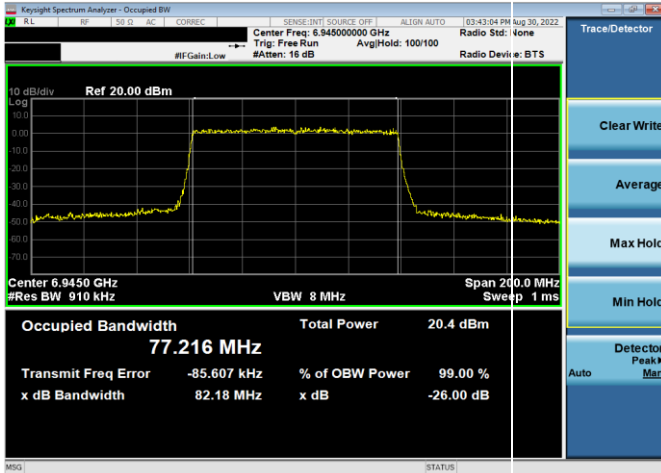


Plot 7-99. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS4)

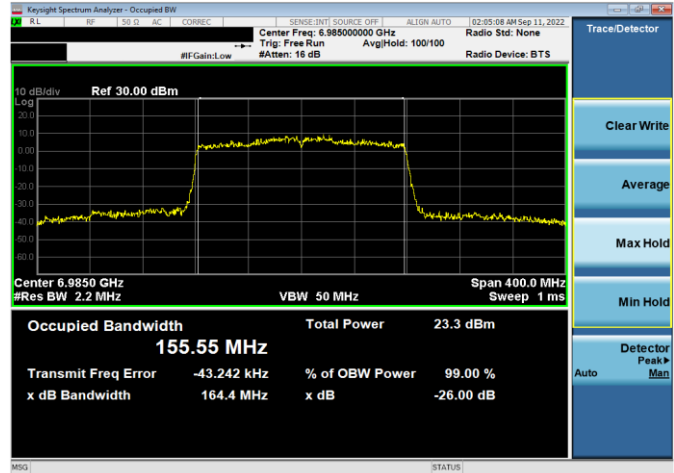


Plot 7-100. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS4)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 43 of 280


High Data Rate

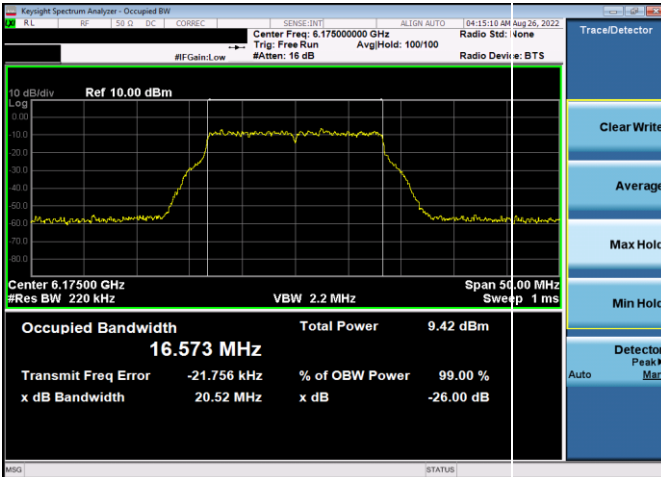


Plot 7-101. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 5) – Ch. 45, 54Mbps)

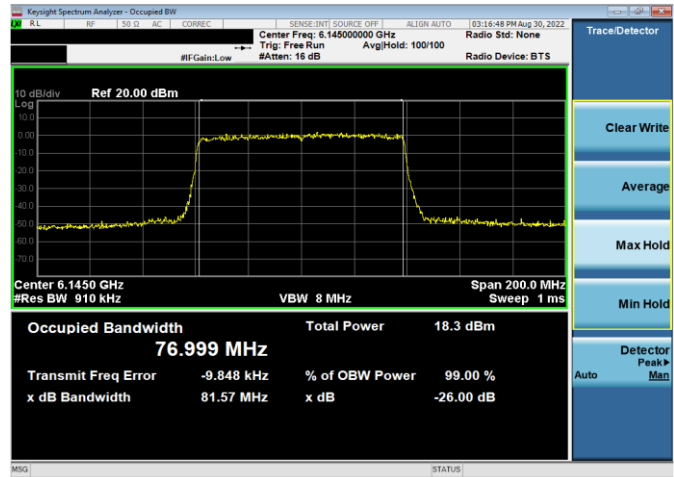


Plot 7-104. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS11)

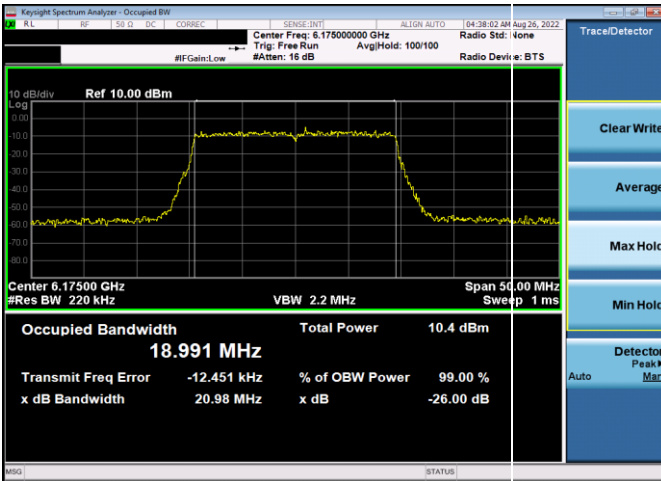


Plot 7-102. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS11)

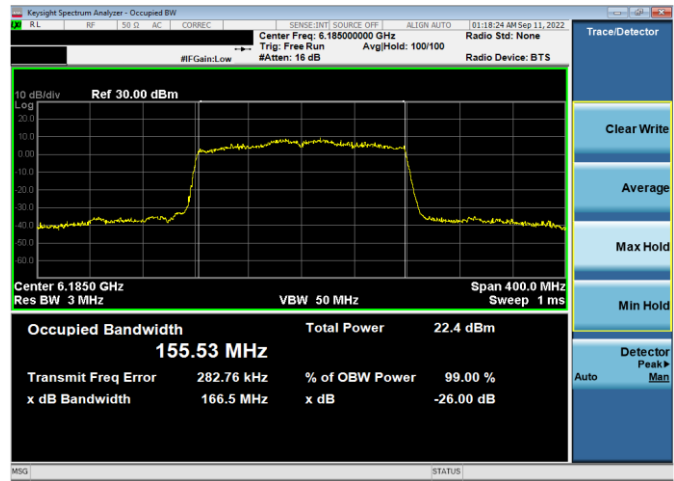

Plot 7-105. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)

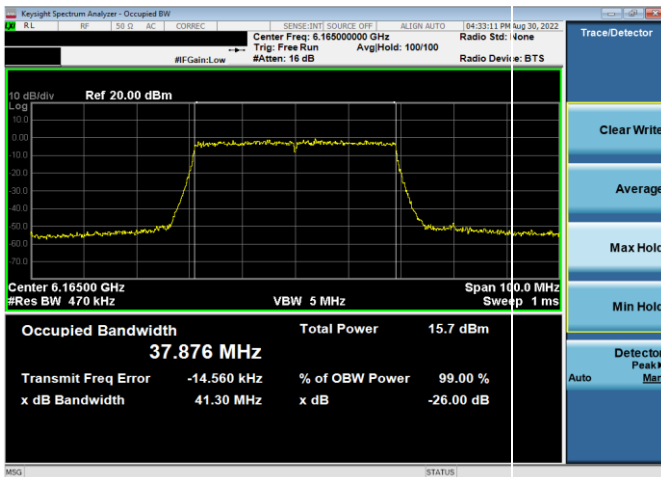


Plot 7-103. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS11)

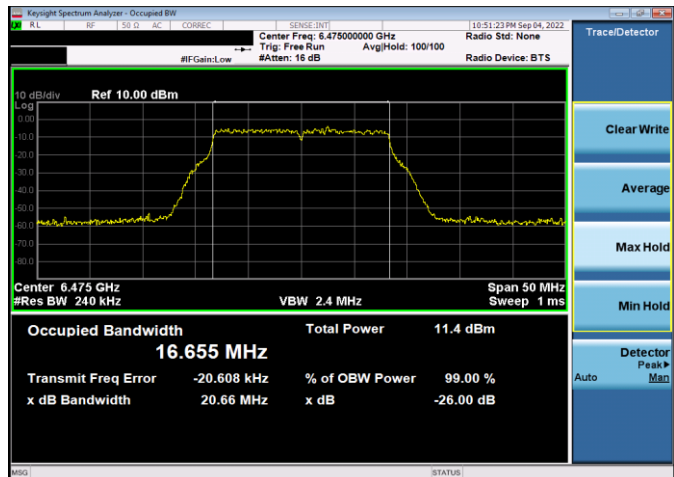


Plot 7-106. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 6) – Ch. 105, 54Mbps)


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 44 of 280

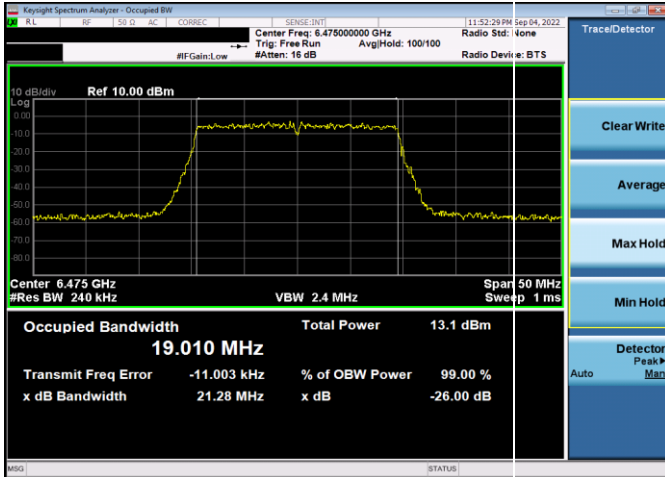


Plot 7-107. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS11)

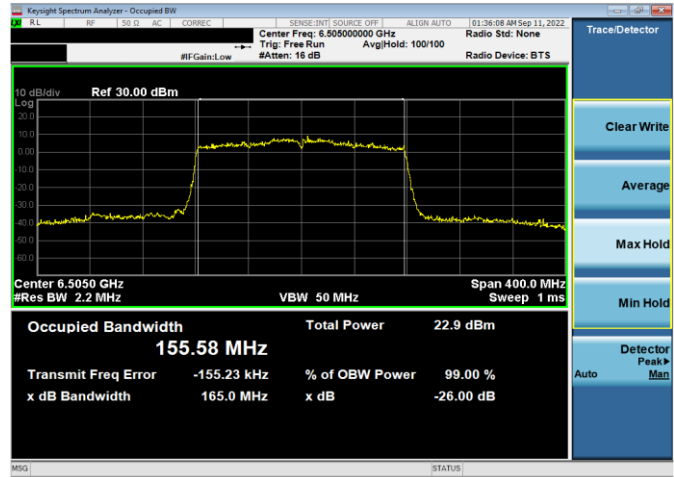


Plot 7-110. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS11)

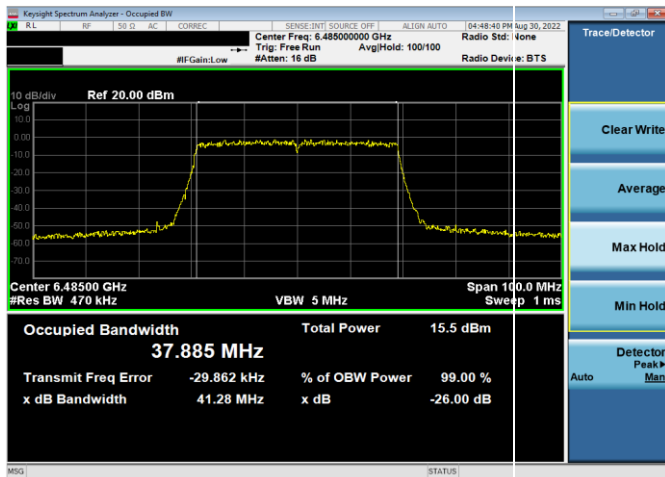


Plot 7-108. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS11)

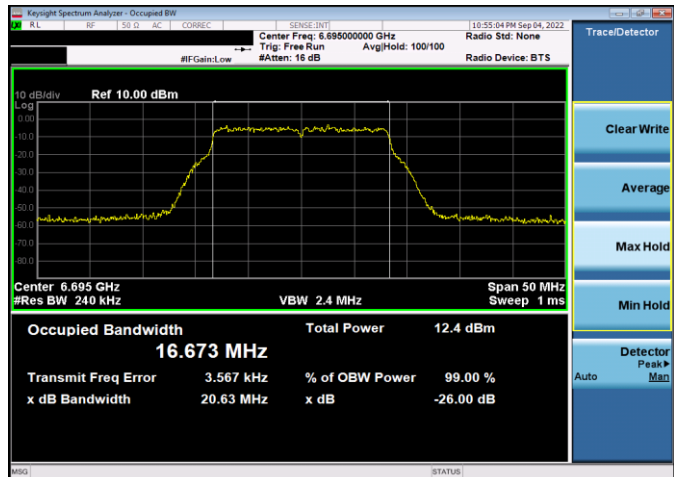

Plot 7-111. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 7) – Ch. 149, 54Mbps)

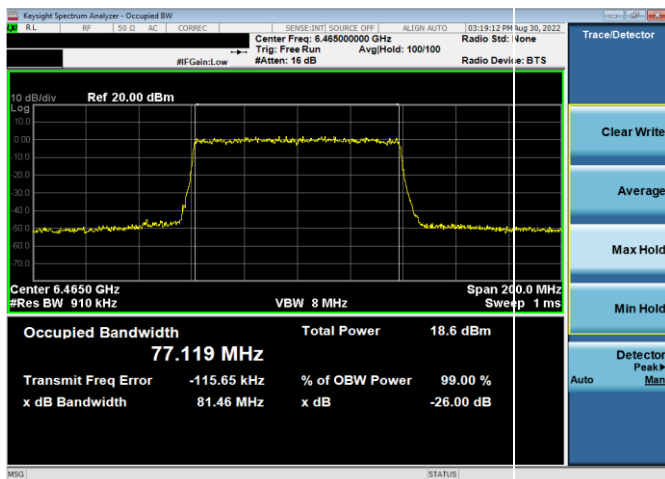


Plot 7-109. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS11)

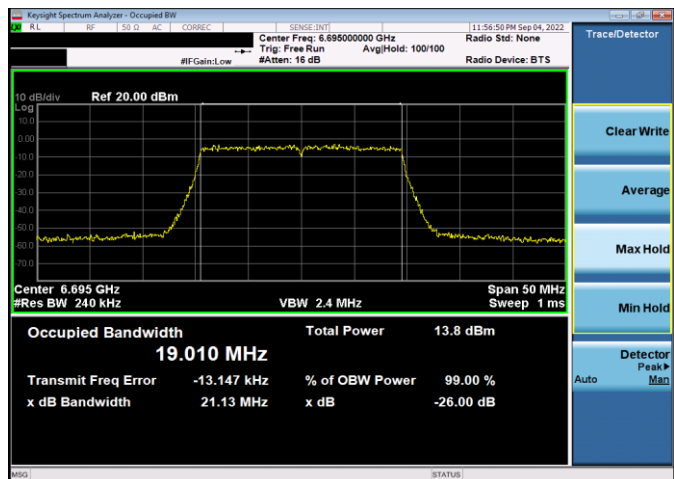


Plot 7-112. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS11)


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 45 of 280

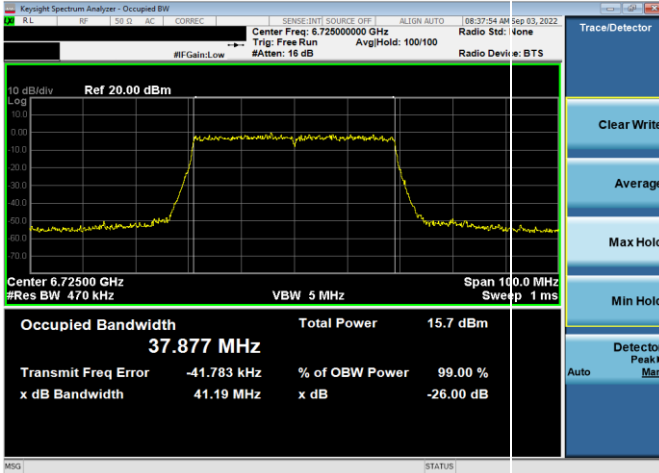


Plot 7-113. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)

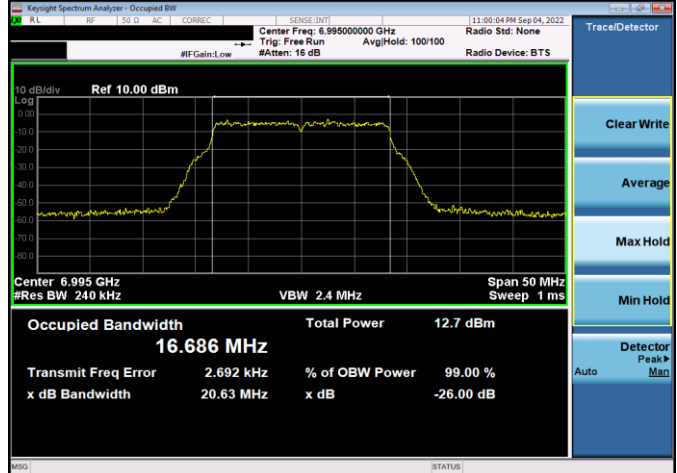


Plot 7-116. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11a (UNII Band 8) – Ch. 209, 54Mbps)

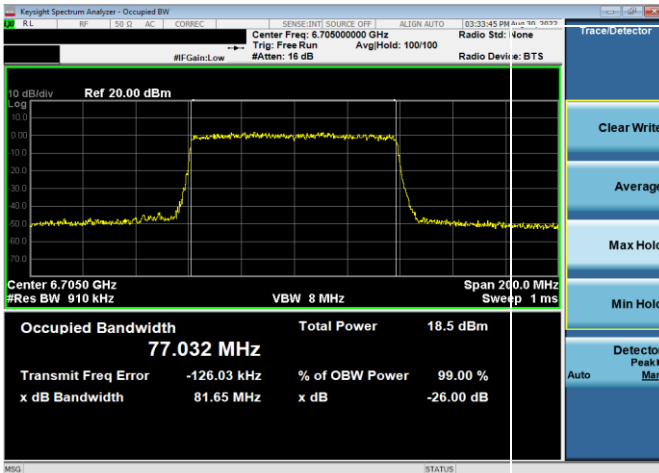


Plot 7-114. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)

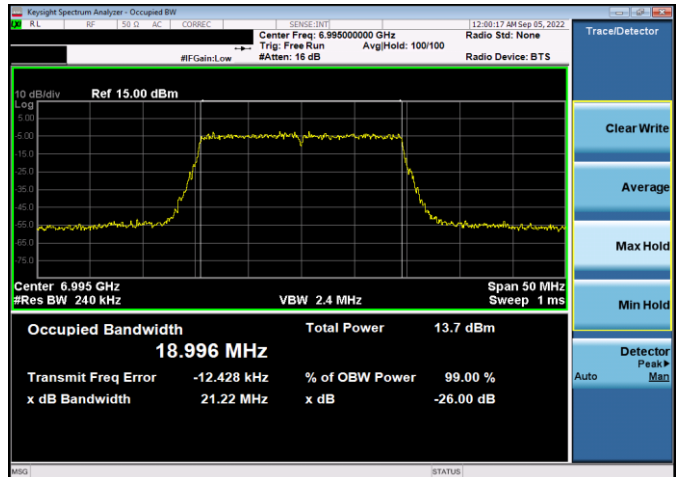

Plot 7-117. 26dB & 99% Bandwidth Plot Antenna WF5t (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS11)

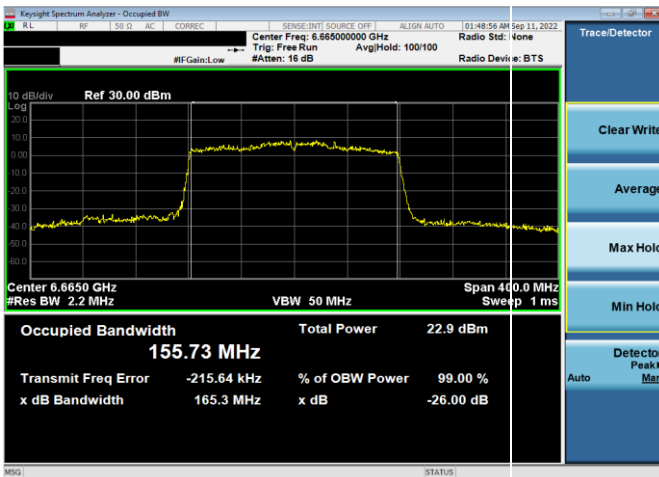


Plot 7-115. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)

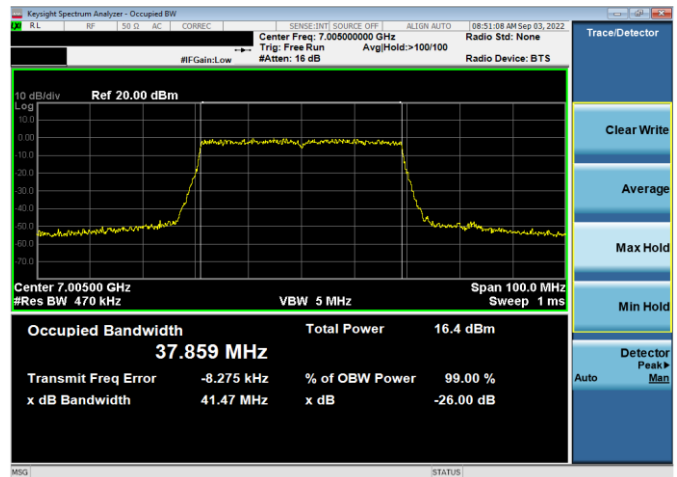


Plot 7-118. 26dB & 99% Bandwidth Plot Antenna WF5t (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS11)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 46 of 280

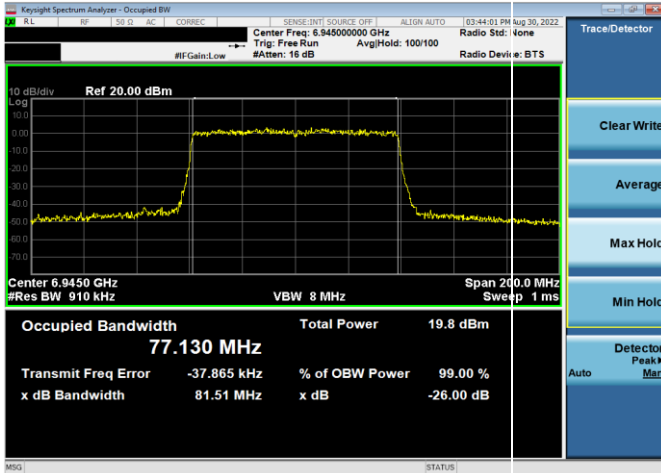

Plot 7-119. 26dB & 99% Bandwidth Plot Antenna WF5t (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS11)

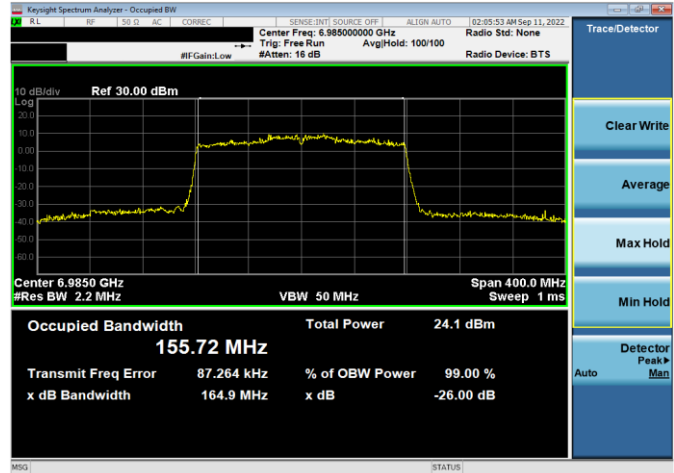

Plot 7-120. 26dB & 99% Bandwidth Plot Antenna WF5t (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS11)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 47 of 280

7.3 Conducted Output Power and Max EIRP Measurement – 802.11a/ax(SU) §15.407(a)(8), RSS-248 [4.6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.925 – 7.125GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E3)b) Method PM-G
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 48 of 280

V 10.5 12/15/2021

7.3.1 Antenna WF5t Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
				5955	1				
6175	45	AVG	3.60	3.75	1.00	4.75	24.00	-19.25	
6415	93	AVG	3.45	3.47	3.10	6.57	24.00	-17.43	
6435	97	AVG	3.77	3.90	3.10	7.00	24.00	-17.00	
6475	105	AVG	3.76	3.70	3.10	6.86	24.00	-17.14	
6515	113	AVG	3.74	3.85	3.30	7.15	24.00	-16.85	
6535	117	AVG	3.94	4.00	3.30	7.30	24.00	-16.70	
6695	149	AVG	3.70	4.00	3.00	7.00	24.00	-17.00	
6875	185	AVG	3.84	3.86	3.00	6.86	24.00	-17.14	
6895	189	AVG	5.00	4.98	3.00	8.00	24.00	-16.00	
6995	209	AVG	4.80	4.97	2.50	7.47	24.00	-16.53	
7095	229	AVG	5.00	4.92	1.30	6.30	24.00	-17.70	
7115	233	AVG	4.68	4.65	1.30	5.98	24.00	-18.02	

Table 7-8. Antenna WF5t 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
				5955	1				
6175	45	AVG	3.69	3.75	1.00	4.75	24.00	-19.25	
6415	93	AVG	3.41	3.44	3.10	6.54	24.00	-17.46	
6435	97	AVG	3.80	3.99	3.10	7.09	24.00	-16.91	
6475	105	AVG	3.91	3.86	3.10	7.01	24.00	-16.99	
6515	113	AVG	3.78	3.80	3.30	7.10	24.00	-16.90	
6535	117	AVG	3.78	4.00	3.30	7.30	24.00	-16.70	
6695	149	AVG	3.91	3.91	3.00	6.91	24.00	-17.09	
6875	185	AVG	3.76	3.86	3.00	6.86	24.00	-17.14	
6895	189	AVG	4.96	4.99	3.00	7.99	24.00	-16.01	
6995	209	AVG	5.00	4.97	2.50	7.50	24.00	-16.50	
7095	229	AVG	4.83	5.00	1.30	6.30	24.00	-17.70	
7115	233	AVG	4.43	4.50	1.30	5.80	24.00	-18.20	

Table 7-9. Antenna WF5t 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 49 of 280

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	3.43	3.33	1.70	5.13	24.00	-18.87
6175	45	AVG	3.68	3.70	1.00	4.70	24.00	-19.30	
6415	93	AVG	3.50	3.33	3.10	6.60	24.00	-17.40	
6435	97	AVG	3.95	3.81	3.10	7.05	24.00	-16.95	
6475	105	AVG	3.86	3.80	3.10	6.96	24.00	-17.04	
6515	113	AVG	3.96	4.00	3.30	7.30	24.00	-16.70	
6535	117	AVG	3.83	3.76	3.30	7.13	24.00	-16.87	
6695	149	AVG	3.90	4.00	3.00	7.00	24.00	-17.00	
6875	185	AVG	3.82	3.97	3.00	6.97	24.00	-17.03	
6895	189	AVG	4.83	4.96	3.00	7.96	24.00	-16.04	
6995	209	AVG	4.86	4.84	2.50	7.36	24.00	-16.64	
7095	229	AVG	4.80	4.96	1.30	6.26	24.00	-17.74	
7115	233	AVG	3.67	3.60	1.30	4.97	24.00	-19.03	

Table 7-10. Antenna WF5t 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	6.39	1.70	8.09	24.00	-15.91
	6205	51	AVG	6.63	1.40	8.03	24.00	-15.97
	6405	91	AVG	6.39	2.70	9.09	24.00	-14.91
	6445	99	AVG	6.86	3.10	9.96	24.00	-14.04
	6485	107	AVG	6.87	3.10	9.97	24.00	-14.03
	6525	115	AVG	6.84	3.30	10.14	24.00	-13.86
	6565	123	AVG	6.91	3.30	10.21	24.00	-13.79
	6725	155	AVG	6.86	2.80	9.66	24.00	-14.34
	6845	179	AVG	6.88	3.00	9.88	24.00	-14.12
	6885	187	AVG	7.00	3.00	10.00	24.00	-14.00
	6965	203	AVG	7.89	2.50	10.39	24.00	-13.61
	7085	227	AVG	7.84	1.80	9.64	24.00	-14.36

Table 7-11. Antenna WF5t 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 50 of 280

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	6.49	1.70	8.19	24.00	-15.81
	6205	51	AVG	6.58	1.40	7.98	24.00	-16.02
	6405	91	AVG	6.45	2.70	9.15	24.00	-14.85
	6445	99	AVG	6.95	3.10	10.05	24.00	-13.95
	6485	107	AVG	6.95	3.10	10.05	24.00	-13.95
	6525	115	AVG	6.92	3.30	10.22	24.00	-13.78
	6565	123	AVG	6.90	3.30	10.20	24.00	-13.80
	6725	155	AVG	6.98	2.80	9.78	24.00	-14.22
	6845	179	AVG	6.97	3.00	9.97	24.00	-14.03
	6885	187	AVG	6.82	3.00	9.82	24.00	-14.18
	6965	203	AVG	7.92	2.50	10.42	24.00	-13.58
	7045	219	AVG	7.85	1.80	9.65	24.00	-14.35
	7085	227	AVG	7.76	1.80	9.56	24.00	-14.44

Table 7-12. Antenna WF5t 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	6.41	1.70	8.11	24.00	-15.89
	6205	51	AVG	6.68	1.40	8.08	24.00	-15.92
	6405	91	AVG	6.37	2.70	9.07	24.00	-14.93
	6445	99	AVG	6.89	3.10	9.99	24.00	-14.01
	6485	107	AVG	6.92	3.10	10.02	24.00	-13.98
	6525	115	AVG	6.87	3.30	10.17	24.00	-13.83
	6565	123	AVG	6.98	3.30	10.28	24.00	-13.72
	6725	155	AVG	7.00	2.80	9.80	24.00	-14.20
	6845	179	AVG	6.90	3.00	9.90	24.00	-14.10
	6885	187	AVG	6.99	3.00	9.99	24.00	-14.01
	6965	203	AVG	7.86	2.50	10.36	24.00	-13.64
	7085	227	AVG	7.79	1.80	9.59	24.00	-14.41

Table 7-13. Antenna WF5t 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 51 of 280

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	9.50	1.70	11.20	24.00	-12.80
	6145	39	AVG	9.60	1.00	10.60	24.00	-13.40
	6385	87	AVG	9.40	2.70	12.10	24.00	-11.90
	6465	103	AVG	10.00	3.10	13.10	24.00	-10.90
	6545	119	AVG	9.94	3.30	13.24	24.00	-10.76
	6705	151	AVG	9.96	3.00	12.96	24.00	-11.04
	6865	183	AVG	9.85	3.00	12.85	24.00	-11.15
	6945	199	AVG	10.77	2.50	13.27	24.00	-10.73
	7025	215	AVG	10.92	1.80	12.72	24.00	-11.28

Table 7-14. Antenna WF5t 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	9.39	1.70	11.09	24.00	-12.91
	6225	55	AVG	9.75	1.40	11.15	24.00	-12.85
	6385	87	AVG	9.43	2.70	12.13	24.00	-11.87
	6465	103	AVG	9.87	3.10	12.97	24.00	-11.03
	6545	119	AVG	9.80	3.30	13.10	24.00	-10.90
	6705	151	AVG	9.80	3.00	12.80	24.00	-11.20
	6865	183	AVG	9.78	3.00	12.78	24.00	-11.22
	6945	199	AVG	10.99	2.50	13.49	24.00	-10.51
	7025	215	AVG	10.83	2.50	13.33	24.00	-10.67

Table 7-15. Antenna WF5t 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	9.48	1.70	11.18	24.00	-12.82
	6225	55	AVG	9.75	1.40	11.15	24.00	-12.85
	6385	87	AVG	9.27	2.70	11.97	24.00	-12.03
	6465	103	AVG	9.82	3.10	12.92	24.00	-11.08
	6545	119	AVG	9.99	3.30	13.29	24.00	-10.71
	6705	151	AVG	10.00	3.00	13.00	24.00	-11.00
	6865	183	AVG	9.91	3.00	12.91	24.00	-11.09
	6945	199	AVG	10.86	2.50	13.36	24.00	-10.64
	7025	215	AVG	10.82	1.80	12.62	24.00	-11.38

Table 7-16. Antenna WF5t 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 52 of 280

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	12.91	1.10	14.01	24.00	-9.99
	6185	47	AVG	12.68	1.00	13.68	24.00	-10.32
	6345	79	AVG	13.00	2.70	15.70	24.00	-8.30
	6505	111	AVG	13.48	3.30	16.78	24.00	-7.22
	6665	143	AVG	13.36	3.00	16.36	24.00	-7.64
	6825	175	AVG	13.37	3.00	16.37	24.00	-7.63
	6985	207	AVG	14.50	2.50	17.00	24.00	-7.00

Table 7-17. Antenna WF5t 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	12.87	1.10	13.97	24.00	-10.03
	6185	47	AVG	12.68	1.00	13.68	24.00	-10.32
	6345	79	AVG	12.90	2.70	15.60	24.00	-8.40
	6505	111	AVG	13.46	3.30	16.76	24.00	-7.24
	6665	143	AVG	13.50	3.00	16.50	24.00	-7.50
	6825	175	AVG	13.46	3.00	16.46	24.00	-7.54
	6985	207	AVG	14.42	2.50	16.92	24.00	-7.08

Table 7-18. Antenna WF5t 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	12.87	1.10	13.97	24.00	-10.03
	6185	47	AVG	12.68	1.00	13.68	24.00	-10.32
	6345	79	AVG	12.91	2.70	15.61	24.00	-8.39
	6505	111	AVG	13.44	3.30	16.74	24.00	-7.26
	6665	143	AVG	13.46	3.00	16.46	24.00	-7.54
	6825	175	AVG	13.40	3.00	16.40	24.00	-7.60
	6985	207	AVG	14.37	2.50	16.87	24.00	-7.13

Table 7-19. Antenna WF5t 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 53 of 280

7.3.2 Antenna WF5b Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
				5955	1				
6175	45	AVG	3.71	3.57	3.60	7.31	24.00	-16.69	
6415	93	AVG	3.30	3.40	3.50	6.90	24.00	-17.10	
6435	97	AVG	3.94	3.93	3.50	7.44	24.00	-16.56	
6475	105	AVG	3.90	3.85	3.50	7.40	24.00	-16.60	
6515	113	AVG	3.89	3.93	3.40	7.33	24.00	-16.67	
6535	117	AVG	3.82	3.97	3.40	7.37	24.00	-16.63	
6695	149	AVG	3.98	4.00	3.20	7.20	24.00	-16.80	
6875	185	AVG	4.00	3.90	2.00	6.00	24.00	-18.00	
6895	189	AVG	4.87	5.00	2.00	7.00	24.00	-17.00	
6995	209	AVG	4.92	4.97	1.50	6.47	24.00	-17.53	
7095	229	AVG	4.93	4.89	1.00	5.93	24.00	-18.07	
7115	233	AVG	4.69	4.65	1.00	5.69	24.00	-18.31	

Table 7-20. Antenna WF5b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
				5955	1				
6175	45	AVG	3.65	3.72	3.60	7.32	24.00	-16.68	
6415	93	AVG	3.50	3.50	3.50	7.00	24.00	-17.00	
6435	97	AVG	3.97	3.96	3.50	7.47	24.00	-16.53	
6475	105	AVG	3.92	4.00	3.50	7.50	24.00	-16.50	
6515	113	AVG	3.79	3.96	3.40	7.36	24.00	-16.64	
6535	117	AVG	4.00	3.83	3.40	7.40	24.00	-16.60	
6695	149	AVG	4.00	3.98	3.20	7.20	24.00	-16.80	
6875	185	AVG	3.95	3.76	2.00	5.95	24.00	-18.05	
6895	189	AVG	4.98	4.88	2.00	6.98	24.00	-17.02	
6995	209	AVG	4.71	4.82	1.50	6.32	24.00	-17.68	
7095	229	AVG	4.97	4.83	1.00	5.97	24.00	-18.03	
7115	233	AVG	4.43	4.49	1.00	5.49	24.00	-18.51	

Table 7-21. Antenna WF5b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 54 of 280

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
				5955	1				
6175	45	AVG	3.72	3.72	3.60	7.32	24.00	-16.68	
6415	93	AVG	3.49	3.43	3.50	6.99	24.00	-17.01	
6435	97	AVG	3.90	3.99	3.50	7.49	24.00	-16.51	
6475	105	AVG	3.93	3.98	3.50	7.48	24.00	-16.52	
6515	113	AVG	3.87	3.90	3.40	7.30	24.00	-16.70	
6535	117	AVG	3.80	3.99	3.40	7.39	24.00	-16.61	
6695	149	AVG	3.78	3.78	3.20	6.98	24.00	-17.02	
6875	185	AVG	3.91	3.99	2.00	5.99	24.00	-18.01	
6895	189	AVG	4.80	4.80	2.00	6.80	24.00	-17.20	
6995	209	AVG	4.80	4.85	1.50	6.35	24.00	-17.65	
7095	229	AVG	4.89	4.80	1.00	5.89	24.00	-18.11	
7115	233	AVG	3.68	3.61	1.00	4.68	24.00	-19.32	

Table 7-22. Antenna WF5b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]								
									5965	3	AVG	6.41	3.60	10.01	24.00	-13.99
									6205	51	AVG	6.70	2.90	9.60	24.00	-14.40
6405	91	AVG	6.45	3.80	10.25	24.00	-13.75									
6445	99	AVG	7.00	3.50	10.50	24.00	-13.50									
6485	107	AVG	6.94	3.50	10.44	24.00	-13.56									
6525	115	AVG	6.96	3.40	10.36	24.00	-13.64									
6565	123	AVG	6.95	3.40	10.35	24.00	-13.65									
6725	155	AVG	7.00	2.50	9.50	24.00	-14.50									
6845	179	AVG	6.82	2.00	8.82	24.00	-15.18									
6885	187	AVG	6.77	2.00	8.77	24.00	-15.23									
6965	203	AVG	8.00	1.50	9.50	24.00	-14.50									
7085	227	AVG	7.93	1.30	9.23	24.00	-14.77									

Table 7-23. Antenna WF5b 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 55 of 280

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	6.29	3.60	9.89	24.00	-14.11
	6205	51	AVG	6.75	2.90	9.65	24.00	-14.35
	6405	91	AVG	6.38	3.80	10.18	24.00	-13.82
	6445	99	AVG	7.00	3.50	10.50	24.00	-13.50
	6485	107	AVG	6.86	3.50	10.36	24.00	-13.64
	6525	115	AVG	6.84	3.40	10.24	24.00	-13.76
	6565	123	AVG	6.89	3.40	10.29	24.00	-13.71
	6725	155	AVG	6.97	2.50	9.47	24.00	-14.53
	6845	179	AVG	7.00	2.00	9.00	24.00	-15.00
	6885	187	AVG	6.88	2.00	8.88	24.00	-15.12
	6965	203	AVG	7.81	1.50	9.31	24.00	-14.69
	7045	219	AVG	8.00	1.30	9.30	24.00	-14.70
	7085	227	AVG	7.84	1.30	9.14	24.00	-14.86

Table 7-24. Antenna WF5b 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	6.32	3.60	9.92	24.00	-14.08
	6205	51	AVG	6.73	2.90	9.63	24.00	-14.37
	6405	91	AVG	6.45	3.80	10.25	24.00	-13.75
	6445	99	AVG	6.85	3.50	10.35	24.00	-13.65
	6485	107	AVG	6.86	3.50	10.36	24.00	-13.64
	6525	115	AVG	6.90	3.40	10.30	24.00	-13.70
	6565	123	AVG	6.77	3.40	10.17	24.00	-13.83
	6725	155	AVG	6.83	2.50	9.33	24.00	-14.67
	6845	179	AVG	6.96	2.00	8.96	24.00	-15.04
	6885	187	AVG	6.98	2.00	8.98	24.00	-15.02
	6965	203	AVG	7.85	1.50	9.35	24.00	-14.65
	7085	227	AVG	7.78	1.30	9.08	24.00	-14.92

Table 7-25. Antenna WF5b 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 56 of 280

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	9.46	3.60	13.06	24.00	-10.94
	6145	39	AVG	9.74	3.60	13.34	24.00	-10.66
	6385	87	AVG	9.47	3.80	13.27	24.00	-10.73
	6465	103	AVG	9.98	3.50	13.48	24.00	-10.52
	6545	119	AVG	9.89	3.40	13.29	24.00	-10.71
	6705	151	AVG	9.95	3.20	13.15	24.00	-10.85
	6865	183	AVG	9.89	2.00	11.89	24.00	-12.11
	6945	199	AVG	10.98	1.50	12.48	24.00	-11.52
	7025	215	AVG	10.76	1.30	12.06	24.00	-11.94

Table 7-26. Antenna WF5b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	9.50	3.60	13.10	24.00	-10.90
	6225	55	AVG	9.59	2.90	12.49	24.00	-11.51
	6385	87	AVG	9.43	3.80	13.23	24.00	-10.77
	6465	103	AVG	9.77	3.50	13.27	24.00	-10.73
	6545	119	AVG	9.79	3.40	13.19	24.00	-10.81
	6625	135	AVG	9.88	3.20	13.08	24.00	-10.92
	6705	151	AVG	9.79	3.20	12.99	24.00	-11.01
	6785	167	AVG	9.97	2.50	12.47	24.00	-11.53
	6865	183	AVG	9.86	2.00	11.86	24.00	-12.14
6945	199	AVG	10.83	1.50	12.33	24.00	-11.67	
7025	215	AVG	11.00	1.30	12.30	24.00	-11.70	

Table 7-27. Antenna WF5b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	9.42	3.60	13.02	24.00	-10.98
	6225	55	AVG	9.74	2.90	12.64	24.00	-11.36
	6385	87	AVG	9.49	3.80	13.29	24.00	-10.71
	6465	103	AVG	9.81	3.50	13.31	24.00	-10.69
	6545	119	AVG	9.85	3.40	13.25	24.00	-10.75
	6705	151	AVG	9.94	3.20	13.14	24.00	-10.86
	6865	183	AVG	9.99	2.00	11.99	24.00	-12.01
	6945	199	AVG	10.98	1.50	12.48	24.00	-11.52
	7025	215	AVG	10.89	1.30	12.19	24.00	-11.81

Table 7-28. Antenna WF5b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 57 of 280

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	12.92	3.90	16.82	24.00	-7.18
	6185	47	AVG	12.66	3.60	16.26	24.00	-7.74
	6345	79	AVG	12.97	3.80	16.77	24.00	-7.23
	6505	111	AVG	13.42	3.40	16.82	24.00	-7.18
	6665	143	AVG	13.37	3.20	16.57	24.00	-7.43
	6825	175	AVG	13.41	2.00	15.41	24.00	-8.59
	6985	207	AVG	14.49	1.50	15.99	24.00	-8.01

Table 7-29. Antenna WF5b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	12.90	3.90	16.80	24.00	-7.20
	6185	47	AVG	12.61	3.60	16.21	24.00	-7.79
	6345	79	AVG	13.00	3.80	16.80	24.00	-7.20
	6505	111	AVG	13.35	3.40	16.75	24.00	-7.25
	6665	143	AVG	13.48	3.20	16.68	24.00	-7.32
	6825	175	AVG	13.40	2.00	15.40	24.00	-8.60
	6985	207	AVG	14.37	1.50	15.87	24.00	-8.13

Table 7-30. Antenna WF5b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	12.99	3.90	16.89	24.00	-7.11
	6185	47	AVG	12.73	3.60	16.33	24.00	-7.67
	6345	79	AVG	12.87	3.80	16.67	24.00	-7.33
	6505	111	AVG	13.49	3.40	16.89	24.00	-7.11
	6665	143	AVG	13.37	3.20	16.57	24.00	-7.43
	6825	175	AVG	13.35	2.00	15.35	24.00	-8.65
	6985	207	AVG	14.48	1.50	15.98	24.00	-8.02

Table 7-31. Antenna WF5b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 58 of 280

7.3.3 SDM Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
					5955	1	SDM				
6175	45	SDM	AVG	1.74	1.70	4.73	2.49	7.22	24.00	-16.78	
6415	93	SDM	AVG	0.96	0.99	3.99	3.30	7.29	24.00	-16.71	
6435	97	SDM	AVG	1.00	0.93	3.98	3.30	7.28	24.00	-16.72	
6475	105	SDM	AVG	0.94	1.00	3.98	3.30	7.28	24.00	-16.72	
6515	113	SDM	AVG	0.93	0.90	3.93	3.35	7.28	24.00	-16.72	
6535	117	SDM	AVG	0.90	0.89	3.91	3.35	7.26	24.00	-16.74	
6695	149	SDM	AVG	0.97	0.86	3.93	3.10	7.03	24.00	-16.97	
6875	185	SDM	AVG	0.96	0.87	3.93	2.53	6.46	24.00	-17.54	
6895	189	SDM	AVG	2.11	2.25	5.19	2.53	7.72	24.00	-16.28	
6995	209	SDM	AVG	2.17	2.14	5.17	2.03	7.20	24.00	-16.80	
7095	229	SDM	AVG	2.15	2.22	5.20	1.15	6.35	24.00	-17.65	
7115	233	SDM	AVG	2.22	2.25	5.25	1.15	6.40	24.00	-17.60	

Table 7-32. SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
					5955	1	SDM				
6175	45	SDM	AVG	1.51	1.75	4.64	2.49	7.13	24.00	-16.87	
6415	93	SDM	AVG	0.88	0.83	3.87	3.30	7.17	24.00	-16.83	
6435	97	SDM	AVG	0.83	0.75	3.80	3.30	7.10	24.00	-16.90	
6475	105	SDM	AVG	0.77	0.77	3.78	3.30	7.08	24.00	-16.92	
6515	113	SDM	AVG	0.80	0.84	3.83	3.35	7.18	24.00	-16.82	
6535	117	SDM	AVG	0.88	0.85	3.88	3.35	7.23	24.00	-16.77	
6695	149	SDM	AVG	0.81	0.80	3.82	3.10	6.92	24.00	-17.08	
6875	185	SDM	AVG	0.88	0.76	3.83	2.53	6.36	24.00	-17.64	
6895	189	SDM	AVG	2.10	2.13	5.13	2.53	7.66	24.00	-16.34	
6995	209	SDM	AVG	2.12	2.00	5.07	2.03	7.10	24.00	-16.90	
7095	229	SDM	AVG	2.22	2.09	5.17	1.15	6.32	24.00	-17.68	
7115	233	SDM	AVG	2.01	2.20	5.12	1.15	6.27	24.00	-17.73	

Table 7-33. SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
					5955	1	SDM				
6175	45	SDM	AVG	1.68	1.74	4.72	2.49	7.21	24.00	-16.79	
6415	93	SDM	AVG	0.76	0.79	3.79	3.30	7.09	24.00	-16.91	
6435	97	SDM	AVG	0.88	0.77	3.84	3.30	7.14	24.00	-16.86	
6475	105	SDM	AVG	0.91	0.93	3.93	3.30	7.23	24.00	-16.77	
6515	113	SDM	AVG	0.98	0.94	3.97	3.35	7.32	24.00	-16.68	
6535	117	SDM	AVG	0.90	0.88	3.90	3.35	7.25	24.00	-16.75	
6695	149	SDM	AVG	0.94	0.97	3.97	3.10	7.07	24.00	-16.93	
6875	185	SDM	AVG	0.96	0.99	3.99	2.53	6.52	24.00	-17.48	
6895	189	SDM	AVG	2.24	2.02	5.14	2.53	7.67	24.00	-16.33	
6995	209	SDM	AVG	2.08	2.12	5.11	2.03	7.14	24.00	-16.86	
7095	229	SDM	AVG	2.16	2.04	5.11	1.15	6.26	24.00	-17.74	
7115	233	SDM	AVG	2.00	2.11	5.07	1.15	6.22	24.00	-17.78	

Table 7-34. SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 59 of 280	

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
	5965	3	SDM	AVG	4.40	4.47	7.45	2.75	10.20	24.00	-13.80
	6205	51	SDM	AVG	4.65	4.57	7.62	2.21	9.83	24.00	-14.17
	6405	91	SDM	AVG	4.00	3.97	7.00	3.28	10.28	24.00	-13.72
	6445	99	SDM	AVG	3.95	3.99	6.98	3.30	10.28	24.00	-13.72
	6485	107	SDM	AVG	3.99	4.00	7.01	3.30	10.31	24.00	-13.69
	6525	115	SDM	AVG	3.97	3.97	6.98	3.35	10.33	24.00	-13.67
	6565	123	SDM	AVG	3.98	3.96	6.98	3.35	10.33	24.00	-13.67
	6725	155	SDM	AVG	3.98	3.82	6.91	2.65	9.56	24.00	-14.44
	6845	179	SDM	AVG	3.83	3.95	6.90	2.53	9.43	24.00	-14.57
	6885	187	SDM	AVG	4.00	3.98	7.00	2.53	9.53	24.00	-14.47
	6965	203	SDM	AVG	5.12	5.20	8.17	2.03	10.20	24.00	-13.80
	7085	227	SDM	AVG	5.10	5.23	8.18	1.15	9.33	24.00	-14.67

Table 7-35. SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
	5965	3	SDM	AVG	4.49	4.44	7.48	2.75	10.23	24.00	-13.77
	6205	51	SDM	AVG	4.54	4.67	7.62	2.21	9.83	24.00	-14.17
	6405	91	SDM	AVG	3.98	4.00	7.00	3.28	10.28	24.00	-13.72
	6445	99	SDM	AVG	3.97	3.98	6.99	3.30	10.29	24.00	-13.71
	6485	107	SDM	AVG	3.83	3.96	6.91	3.30	10.21	24.00	-13.79
	6525	115	SDM	AVG	3.88	3.97	6.94	3.35	10.29	24.00	-13.71
	6565	123	SDM	AVG	3.91	3.84	6.89	3.35	10.24	24.00	-13.76
	6725	155	SDM	AVG	3.99	3.96	6.99	2.65	9.64	24.00	-14.36
	6845	179	SDM	AVG	3.95	3.99	6.98	2.53	9.51	24.00	-14.49
	6885	187	SDM	AVG	4.00	3.85	6.94	2.53	9.47	24.00	-14.53
	6965	203	SDM	AVG	5.08	5.13	8.12	2.03	10.15	24.00	-13.85
	7045	219	SDM	AVG	5.19	5.01	8.11	2.03	10.14	24.00	-13.86
	7085	227	SDM	AVG	5.02	5.15	8.10	1.15	9.25	24.00	-14.75

Table 7-36. SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
	5965	3	SDM	AVG	4.49	4.45	7.48	2.75	10.23	24.00	-13.77
	6205	51	SDM	AVG	4.68	4.62	7.66	2.21	9.87	24.00	-14.13
	6405	91	SDM	AVG	3.87	3.99	6.94	3.28	10.22	24.00	-13.78
	6445	99	SDM	AVG	3.80	3.94	6.88	3.30	10.18	24.00	-13.82
	6485	107	SDM	AVG	3.85	4.00	6.94	3.30	10.24	24.00	-13.76
	6525	115	SDM	AVG	3.93	3.99	6.97	3.35	10.32	24.00	-13.68
	6565	123	SDM	AVG	3.82	3.98	6.91	3.35	10.26	24.00	-13.74
	6725	155	SDM	AVG	3.95	3.83	6.90	2.65	9.55	24.00	-14.45
	6845	179	SDM	AVG	3.99	3.76	6.89	2.53	9.42	24.00	-14.58
	6885	187	SDM	AVG	4.00	3.84	6.93	2.53	9.46	24.00	-14.54
	6965	203	SDM	AVG	5.14	5.10	8.13	2.03	10.16	24.00	-13.84
	7085	227	SDM	AVG	5.01	5.18	8.11	1.15	9.26	24.00	-14.74

Table 7-37. SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 60 of 280

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
					5985	7	SDM				
6145	39	SDM	AVG	7.73	7.74	10.75	2.49	13.24	24.00	-10.76	
6385	87	SDM	AVG	6.96	6.82	9.90	3.28	13.18	24.00	-10.82	
6465	103	SDM	AVG	6.91	6.98	9.96	3.30	13.26	24.00	-10.74	
6545	119	SDM	AVG	6.93	7.00	9.98	3.35	13.33	24.00	-10.67	
6705	151	SDM	AVG	6.99	6.99	10.00	3.10	13.10	24.00	-10.90	
6865	183	SDM	AVG	6.97	6.95	9.97	2.53	12.50	24.00	-11.50	
6945	199	SDM	AVG	8.06	8.08	11.08	2.03	13.11	24.00	-10.89	
7025	215	SDM	AVG	8.08	8.02	11.06	2.03	13.09	24.00	-10.91	

Table 7-38. SDM 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
					5985	7	SDM				
6225	55	SDM	AVG	7.67	7.68	10.69	2.21	12.90	24.00	-11.10	
6385	87	SDM	AVG	6.99	6.85	9.93	3.28	13.21	24.00	-10.79	
6465	103	SDM	AVG	6.93	6.83	9.89	3.30	13.19	24.00	-10.81	
6545	119	SDM	AVG	7.00	6.88	9.95	3.35	13.30	24.00	-10.70	
6705	151	SDM	AVG	6.99	6.85	9.93	3.10	13.03	24.00	-10.97	
6865	183	SDM	AVG	6.82	6.82	9.83	2.53	12.36	24.00	-11.64	
6945	199	SDM	AVG	8.01	8.13	11.08	2.03	13.11	24.00	-10.89	
7025	215	SDM	AVG	8.10	8.08	11.10	2.03	13.13	24.00	-10.87	

Table 7-39. SDM 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
					5985	7	SDM				
6225	55	SDM	AVG	7.48	7.49	10.50	2.21	12.71	24.00	-11.29	
6385	87	SDM	AVG	6.99	6.94	9.98	3.28	13.26	24.00	-10.74	
6465	103	SDM	AVG	6.85	6.83	9.85	3.30	13.15	24.00	-10.85	
6545	119	SDM	AVG	6.97	6.92	9.96	3.35	13.31	24.00	-10.69	
6705	151	SDM	AVG	6.95	6.91	9.94	3.10	13.04	24.00	-10.96	
6865	183	SDM	AVG	6.81	6.85	9.84	2.53	12.37	24.00	-11.63	
6945	199	SDM	AVG	8.21	8.15	11.19	2.03	13.22	24.00	-10.78	
7025	215	SDM	AVG	8.12	8.23	11.19	2.03	13.22	24.00	-10.78	

Table 7-40. SDM 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
					6025	15	SDM				
6185	47	SDM	AVG	10.62	10.62	13.63	2.49	16.12	24.00	-7.88	
6345	79	SDM	AVG	10.37	10.48	13.44	3.28	16.72	24.00	-7.28	
6505	111	SDM	AVG	10.36	10.49	13.44	3.35	16.79	24.00	-7.21	
6665	143	SDM	AVG	10.44	10.38	13.42	3.10	16.52	24.00	-7.48	
6825	175	SDM	AVG	10.41	10.41	13.42	2.53	15.95	24.00	-8.05	
6985	207	SDM	AVG	11.61	11.65	14.64	2.03	16.67	24.00	-7.33	

Table 7-41. SDM 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 61 of 280

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
	6025	15	SDM	AVG	10.76	10.93	13.86	2.72	16.58	24.00	-7.42
	6185	47	SDM	AVG	10.69	10.75	13.73	2.49	16.22	24.00	-7.78
	6345	79	SDM	AVG	10.45	10.37	13.42	3.28	16.70	24.00	-7.30
	6505	111	SDM	AVG	10.49	10.33	13.42	3.35	16.77	24.00	-7.23
	6665	143	SDM	AVG	10.41	10.47	13.45	3.10	16.55	24.00	-7.45
	6825	175	SDM	AVG	10.30	10.46	13.39	2.53	15.92	24.00	-8.08
	6985	207	SDM	AVG	11.60	11.66	14.64	2.03	16.67	24.00	-7.33

Table 7-42. SDM 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5t	Antenna WF5b	Summed				
	6025	15	SDM	AVG	10.78	10.80	13.80	2.72	16.52	24.00	-7.48
	6185	47	SDM	AVG	10.68	10.61	13.66	2.49	16.15	24.00	-7.85
	6345	79	SDM	AVG	10.38	10.40	13.40	3.28	16.68	24.00	-7.32
	6505	111	SDM	AVG	10.50	10.46	13.49	3.35	16.84	24.00	-7.16
	6665	143	SDM	AVG	10.40	10.40	13.41	3.10	16.51	24.00	-7.49
	6825	175	SDM	AVG	10.31	10.48	13.41	2.53	15.94	24.00	-8.06
	6985	207	SDM	AVG	11.60	11.65	14.64	2.03	16.67	24.00	-7.33

Table 7-43. SDM 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 62 of 280

Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna WF5t and Antenna WF5b were first measured separately during SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10-2013 Section 14.4.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5955MHz in 802.11ax (20MHz BW) mode, the average conducted output power was measured to be 3.49 dBm for Antenna WF5t and 3.34 dBm for Antenna WF5b.

$$\text{Antenna WF5t} + \text{Antenna WF5b} = \text{CDD/SDM}$$

$$(3.49 \text{ dBm} + 3.34 \text{ dBm}) = (2.233 \text{ mW} + 2.158 \text{ mW}) = 4.39 \text{ mW} = 6.43 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5955MHz in 802.11ax (20MHz BW) mode, the average CDD/SDM conducted power was calculated to be 6.43dBm with directional gain of 2.75 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$6.43 \text{ dBm} + 2.75 \text{ dBi} = 9.18 \text{ dBm}$$

FCC ID: BCGA2759 IC: 579C-A2759	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG		Test Dates: 05/27/2022 - 9/26/2022

7.4 Maximum Power Spectral Density – 802.11a/ax(SU) §15.407(a)(8), RSS-248 [4.6.3]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.925 – 7.125GHz band, the maximum permissible power spectral density must not exceed -1dBm e.i.r.p in any 1-megahertz band.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F
ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. The data rates have been classified into three different groups; Low Data Rate, Middle Data Rate, and High Data Rate. All three data rate groups of data rate have been investigated and only the worst case data rate per group is reported.
2. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel psd plots have been reported.

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 64 of 280

V 10.5 12/15/2021

7.4.1 Antenna WF5t Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [MHz]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]	
Band 5	5955	1	a	12	-6.16	1.70	-4.46	-1	-3.46	
	6175	45	a	12	-7.37	1.00	-6.37	-1	-5.37	
	6415	93	a	12	-5.88	3.10	-2.78	-1	-1.78	
	5955	1	ax (20MHz)	24/25.8 (MCS2)	-7.55	1.70	-5.85	-1	-4.85	
	6175	45	ax (20MHz)	24/25.8 (MCS2)	-8.99	1.00	-7.99	-1	-6.99	
	6415	93	ax (20MHz)	24/25.8 (MCS2)	-7.25	3.10	-4.15	-1	-3.15	
	5965	3	ax (40MHz)	49/51.6 (MCS2)	-7.68	1.70	-5.98	-1	-4.98	
	6165	43	ax (40MHz)	49/51.6 (MCS2)	-7.40	1.00	-6.40	-1	-5.40	
	6405	91	ax (40MHz)	49/51.6 (MCS2)	-7.83	2.70	-5.13	-1	-4.13	
	5985	7	ax (80MHz)	102/108.1 (MCS2)	-7.41	1.70	-5.71	-1	-4.71	
	6145	39	ax (80MHz)	102/108.1 (MCS2)	-7.48	1.00	-6.48	-1	-5.48	
	6385	87	ax (80MHz)	102/108.1 (MCS2)	-7.63	2.70	-4.93	-1	-3.93	
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	-6.05	1.10	-4.95	-1	-3.95	
	6185	47	ax (160MHz)	183.8/216.2 (MCS2)	-6.14	1.00	-5.14	-1	-4.14	
6345	79	ax (160MHz)	183.8/216.2 (MCS2)	-5.61	2.70	-2.91	-1	-1.91		
Band 6	6435	97	a	12	-5.30	3.10	-2.20	-1	-1.20	
	6475	105	a	12	-5.28	3.10	-2.18	-1	-1.18	
	6515	113	a	12	-5.30	3.30	-2.00	-1	-1.00	
	6435	97	ax (20MHz)	24/25.8 (MCS2)	-6.70	3.10	-3.60	-1	-2.60	
	6475	105	ax (20MHz)	24/25.8 (MCS2)	-8.13	3.10	-5.03	-1	-4.03	
	6515	113	ax (20MHz)	24/25.8 (MCS2)	-8.04	3.30	-4.74	-1	-3.74	
	6445	99	ax (40MHz)	49/51.6 (MCS2)	-7.34	3.10	-4.24	-1	-3.24	
	6485	107	ax (40MHz)	49/51.6 (MCS2)	-7.23	3.10	-4.13	-1	-3.13	
	6525	115	ax (40MHz)	49/51.6 (MCS2)	-7.36	3.30	-4.06	-1	-3.06	
	6465	103	ax (80MHz)	102/108.1 (MCS2)	-7.34	3.10	-4.24	-1	-3.24	
	6505	111	ax (160MHz)	183.8/216.2 (MCS2)	-5.32	3.30	-2.02	-1	-1.02	
	Band 7	6535	117	a	12	-4.97	3.30	-1.67	-1	-0.67
		6695	149	a	12	-5.16	3.00	-2.16	-1	-1.16
		6875	185	a	12	-4.76	3.00	-1.76	-1	-0.76
6535		117	ax (20MHz)	24/25.8 (MCS2)	-7.85	3.30	-4.55	-1	-3.55	
6695		149	ax (20MHz)	24/25.8 (MCS2)	-6.27	3.00	-3.27	-1	-2.27	
6875		185	ax (20MHz)	24/25.8 (MCS2)	-6.26	3.00	-3.26	-1	-2.26	
6565		123	ax (40MHz)	49/51.6 (MCS2)	-7.32	3.30	-4.02	-1	-3.02	
6725		155	ax (40MHz)	49/51.6 (MCS2)	-7.18	2.80	-4.38	-1	-3.38	
6845		179	ax (40MHz)	49/51.6 (MCS2)	-7.11	3.00	-4.11	-1	-3.11	
6545		119	ax (80MHz)	102/108.1 (MCS2)	-6.97	3.30	-3.67	-1	-2.67	
6705		151	ax (80MHz)	102/108.1 (MCS2)	-7.01	3.00	-4.01	-1	-3.01	
6865		183	ax (80MHz)	102/108.1 (MCS2)	-7.12	3.00	-4.12	-1	-3.12	
6665		143	ax (160MHz)	183.8/216.2 (MCS2)	-4.63	3.00	-1.63	-1	-0.63	
6825		175	ax (160MHz)	183.8/216.2 (MCS2)	-5.43	3.00	-2.43	-1	-1.43	
Band 8	6895	189	a	12	-6.31	3.00	-3.31	-1	-2.31	
	6995	209	a	12	-4.12	2.50	-1.62	-1	-0.62	
	7115	233	a	12	-4.79	1.30	-3.49	-1	-2.49	
	6895	189	ax (20MHz)	24/25.8 (MCS2)	-5.40	3.00	-2.40	-1	-1.40	
	6995	209	ax (20MHz)	24/25.8 (MCS2)	-5.81	2.50	-3.31	-1	-2.31	
	7115	233	ax (20MHz)	24/25.8 (MCS2)	-6.29	1.30	-4.99	-1	-3.99	
	6845	187	ax (40MHz)	49/51.6 (MCS2)	-7.21	3.00	-4.21	-1	-3.21	
	7005	211	ax (40MHz)	49/51.6 (MCS2)	-6.53	2.50	-4.03	-1	-3.03	
	7085	227	ax (40MHz)	49/51.6 (MCS2)	-6.94	1.30	-5.64	-1	-4.64	
	6945	199	ax (80MHz)	102/108.1 (MCS2)	-6.59	2.50	-4.09	-1	-3.09	
	7025	215	ax (80MHz)	102/108.1 (MCS2)	-7.02	1.80	-5.22	-1	-4.22	
	6985	207	ax (160MHz)	183.8/216.2 (MCS2)	-4.68	2.50	-2.18	-1	-1.18	

Table 7-44. Power Spectral Density Measurements Antenna WF5t (Low Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 65 of 280

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [MHz]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]	
Band 5	5955	1	a	24	-6.00	1.70	-4.30	-1	-3.30	
	6175	45	a	24	-7.13	1.00	-6.13	-1	-5.13	
	6415	93	a	24	-5.62	3.10	-2.52	-1	-1.52	
	5955	1	ax (20MHz)	49/51.6 (MCS4)	-7.44	1.70	-5.74	-1	-4.74	
	6175	45	ax (20MHz)	49/51.6 (MCS4)	-8.94	1.00	-7.94	-1	-6.94	
	6415	93	ax (20MHz)	49/51.6 (MCS4)	-7.16	3.10	-4.06	-1	-3.06	
	5965	3	ax (40MHz)	98/103.2 (MCS4)	-7.59	1.70	-5.89	-1	-4.89	
	6165	43	ax (40MHz)	98/103.2 (MCS4)	-7.20	1.00	-6.20	-1	-5.20	
	6405	91	ax (40MHz)	98/103.2 (MCS4)	-7.60	2.70	-4.90	-1	-3.90	
	5985	7	ax (80MHz)	204/216.2 (MCS4)	-7.33	1.70	-5.63	-1	-4.63	
	6145	39	ax (80MHz)	204/216.2 (MCS4)	-7.30	1.00	-6.30	-1	-5.30	
	6385	87	ax (80MHz)	204/216.2 (MCS4)	-8.18	2.70	-5.48	-1	-4.48	
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	-5.70	1.10	-4.60	-1	-3.60	
6185	47	ax (160MHz)	367.5/432.4 (MCS4)	-5.76	1.00	-4.76	-1	-3.76		
6345	79	ax (160MHz)	367.5/432.4 (MCS4)	-5.49	2.70	-2.79	-1	-1.79		
Band 6	6435	97	a	24	-5.22	3.10	-2.12	-1	-1.12	
	6475	105	a	24	-5.11	3.10	-2.01	-1	-1.01	
	6515	113	a	24	-5.24	3.30	-1.94	-1	-0.94	
	6435	97	ax (20MHz)	49/51.6 (MCS4)	-6.44	3.10	-3.34	-1	-2.34	
	6475	105	ax (20MHz)	49/51.6 (MCS4)	-6.82	3.10	-3.72	-1	-2.72	
	6515	113	ax (20MHz)	49/51.6 (MCS4)	-7.80	3.30	-4.50	-1	-3.50	
	6445	99	ax (40MHz)	98/103.2 (MCS4)	-7.21	3.10	-4.11	-1	-3.11	
	6485	107	ax (40MHz)	98/103.2 (MCS4)	-6.97	3.10	-3.87	-1	-2.87	
	6525	115	ax (40MHz)	98/103.2 (MCS4)	-7.05	3.30	-3.75	-1	-2.75	
	6465	103	ax (80MHz)	204/216.2 (MCS4)	-6.63	3.10	-3.53	-1	-2.53	
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	-5.36	3.30	-2.06	-1	-1.06	
	Band 7	6535	117	a	24	-5.62	3.30	-2.32	-1	-1.32
		6695	149	a	24	-4.72	3.00	-1.72	-1	-0.72
6875		185	a	24	-5.02	3.00	-2.02	-1	-1.02	
6535		117	ax (20MHz)	49/51.6 (MCS4)	-7.65	3.30	-4.35	-1	-3.35	
6695		149	ax (20MHz)	49/51.6 (MCS4)	-6.07	3.00	-3.07	-1	-2.07	
6875		185	ax (20MHz)	49/51.6 (MCS4)	-6.12	3.00	-3.12	-1	-2.12	
6565		123	ax (40MHz)	98/103.2 (MCS4)	-6.96	3.30	-3.66	-1	-2.66	
6725		155	ax (40MHz)	98/103.2 (MCS4)	-6.99	2.80	-4.19	-1	-3.19	
6845		179	ax (40MHz)	98/103.2 (MCS4)	-6.91	3.00	-3.91	-1	-2.91	
6545		119	ax (80MHz)	204/216.2 (MCS4)	-6.63	3.30	-3.33	-1	-2.33	
6705		151	ax (80MHz)	204/216.2 (MCS4)	-6.54	3.00	-3.54	-1	-2.54	
6865		183	ax (80MHz)	204/216.2 (MCS4)	-6.94	3.00	-3.94	-1	-2.94	
6665		143	ax (160MHz)	367.5/432.4 (MCS4)	-5.44	3.00	-2.44	-1	-1.44	
6825	175	ax (160MHz)	367.5/432.4 (MCS4)	-5.10	3.00	-2.10	-1	-1.10		
Band 8	6895	189	a	24	-5.99	3.00	-2.99	-1	-1.99	
	6995	209	a	24	-4.80	2.50	-2.30	-1	-1.30	
	7115	233	a	24	-4.92	1.30	-3.62	-1	-2.62	
	6895	189	ax (20MHz)	49/51.6 (MCS4)	-5.21	3.00	-2.21	-1	-1.21	
	6995	209	ax (20MHz)	49/51.6 (MCS4)	-5.65	2.50	-3.15	-1	-2.15	
	7115	233	ax (20MHz)	49/51.6 (MCS4)	-6.43	1.30	-5.13	-1	-4.13	
	6845	187	ax (40MHz)	98/103.2 (MCS4)	-6.70	3.00	-3.70	-1	-2.70	
	7005	211	ax (40MHz)	98/103.2 (MCS4)	-6.50	2.50	-4.00	-1	-3.00	
	7085	227	ax (40MHz)	98/103.2 (MCS4)	-6.61	1.30	-5.31	-1	-4.31	
	6945	199	ax (80MHz)	204/216.2 (MCS4)	-6.23	2.50	-3.73	-1	-2.73	
	7025	215	ax (80MHz)	204/216.2 (MCS4)	-6.86	1.80	-5.06	-1	-4.06	
	6985	207	ax (160MHz)	367.5/432.4 (MCS4)	-4.18	2.50	-1.68	-1	-0.68	

Table 7-45. Power Spectral Density Measurements Antenna WF5t (Mid Data Rate)


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 66 of 280

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [MHz]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]	
Band 5	5955	1	a	54	-6.94	1.70	-5.24	-1	-4.24	
	6175	45	a	54	-8.35	1.00	-7.35	-1	-6.35	
	6415	93	a	54	-6.89	3.10	-3.79	-1	-2.79	
	5955	1	ax (20MHz)	135/143.4 (MCS11)	-7.19	1.70	-5.49	-1	-4.49	
	6175	45	ax (20MHz)	135/143.4 (MCS11)	-8.94	1.00	-7.94	-1	-6.94	
	6415	93	ax (20MHz)	135/143.4 (MCS11)	-6.75	3.10	-3.65	-1	-2.65	
	5965	3	ax (40MHz)	271/286.8 (MCS11)	-7.10	1.70	-5.40	-1	-4.40	
	6165	43	ax (40MHz)	271/286.8 (MCS11)	-7.04	1.00	-6.04	-1	-5.04	
	6405	91	ax (40MHz)	271/286.8 (MCS11)	-7.31	2.70	-4.61	-1	-3.61	
	5985	7	ax (80MHz)	567/600.5 (MCS11)	-7.05	1.70	-5.35	-1	-4.35	
	6145	39	ax (80MHz)	567/600.5 (MCS11)	-6.95	1.00	-5.95	-1	-4.95	
	6385	87	ax (80MHz)	567/600.5 (MCS11)	-7.38	2.70	-4.68	-1	-3.68	
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	-5.54	1.10	-4.44	-1	-3.44	
6185	47	ax (160MHz)	1020.8/1201 (MCS11)	-5.52	1.00	-4.52	-1	-3.52		
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	-5.30	2.70	-2.60	-1	-1.60		
Band 6	6435	97	a	54	-6.41	3.10	-3.31	-1	-2.31	
	6475	105	a	54	-6.40	3.10	-3.30	-1	-2.30	
	6515	113	a	54	-6.42	3.30	-3.12	-1	-2.12	
	6435	97	ax (20MHz)	135/143.4 (MCS11)	-6.39	3.10	-3.29	-1	-2.29	
	6475	105	ax (20MHz)	135/143.4 (MCS11)	-6.47	3.10	-3.37	-1	-2.37	
	6515	113	ax (20MHz)	135/143.4 (MCS11)	-6.28	3.30	-2.98	-1	-1.98	
	6445	99	ax (40MHz)	271/286.8 (MCS11)	-6.60	3.10	-3.50	-1	-2.50	
	6485	107	ax (40MHz)	271/286.8 (MCS11)	-6.69	3.10	-3.59	-1	-2.59	
	6525	115	ax (40MHz)	271/286.8 (MCS11)	-6.42	3.30	-3.12	-1	-2.12	
	6465	103	ax (80MHz)	567/600.5 (MCS11)	-6.63	3.10	-3.53	-1	-2.53	
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	-4.88	3.30	-1.58	-1	-0.58	
	Band 7	6535	117	a	54	-5.92	3.30	-2.62	-1	-1.62
		6695	149	a	54	-5.82	3.00	-2.82	-1	-1.82
6875		185	a	54	-6.06	3.00	-3.06	-1	-2.06	
6535		117	ax (20MHz)	135/143.4 (MCS11)	-7.54	3.30	-4.24	-1	-3.24	
6695		149	ax (20MHz)	135/143.4 (MCS11)	-5.85	3.00	-2.85	-1	-1.85	
6875		185	ax (20MHz)	135/143.4 (MCS11)	-6.04	3.00	-3.04	-1	-2.04	
6565		123	ax (40MHz)	271/286.8 (MCS11)	-6.64	3.30	-3.34	-1	-2.34	
6725		155	ax (40MHz)	271/286.8 (MCS11)	-6.63	2.80	-3.83	-1	-2.83	
6845		179	ax (40MHz)	271/286.8 (MCS11)	-5.51	3.00	-2.51	-1	-1.51	
6545		119	ax (80MHz)	567/600.5 (MCS11)	-6.51	3.30	-3.21	-1	-2.21	
6705		151	ax (80MHz)	567/600.5 (MCS11)	-6.44	3.00	-3.44	-1	-2.44	
6865		183	ax (80MHz)	567/600.5 (MCS11)	-6.62	3.00	-3.62	-1	-2.62	
6665		143	ax (160MHz)	1020.8/1201 (MCS11)	-5.16	3.00	-2.16	-1	-1.16	
6825	175	ax (160MHz)	1020.8/1201 (MCS11)	-5.04	3.00	-2.04	-1	-1.04		
Band 8	6895	189	a	54	-4.69	3.00	-1.69	-1	-0.69	
	6995	209	a	54	-5.19	2.50	-2.69	-1	-1.69	
	7115	233	a	54	-6.86	1.30	-5.56	-1	-4.56	
	6895	189	ax (20MHz)	135/143.4 (MCS11)	-5.22	3.00	-2.22	-1	-1.22	
	6995	209	ax (20MHz)	135/143.4 (MCS11)	-5.45	2.50	-2.95	-1	-1.95	
	7115	233	ax (20MHz)	135/143.4 (MCS11)	-7.13	1.30	-5.83	-1	-4.83	
	6845	187	ax (40MHz)	271/286.8 (MCS11)	-6.46	3.00	-3.46	-1	-2.46	
	7005	211	ax (40MHz)	271/286.8 (MCS11)	-5.95	2.50	-3.45	-1	-2.45	
	7085	227	ax (40MHz)	271/286.8 (MCS11)	-6.22	1.30	-4.92	-1	-3.92	
	6945	199	ax (80MHz)	567/600.5 (MCS11)	-5.97	2.50	-3.47	-1	-2.47	
	7025	215	ax (80MHz)	567/600.5 (MCS11)	-5.11	1.80	-3.31	-1	-2.31	
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	-3.95	2.50	-1.45	-1	-0.45	


Table 7-46. Power Spectral Density Measurements Antenna WF5t (High Data Rate)

FCC ID: BCGA2759 IC: 579C-A2759			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 67 of 280	


Low Data Rate

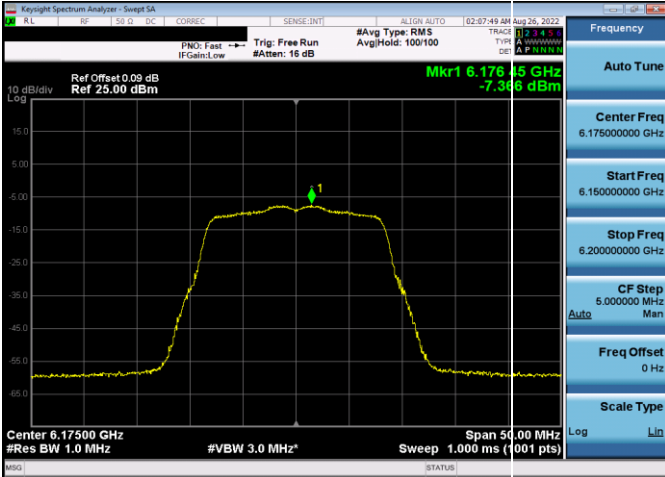


Plot 7-121. Power Spectral Density Plot Antenna WF5t (20MHz 802.11a (UNII Band 5) – Ch. 45, 12Mbps)

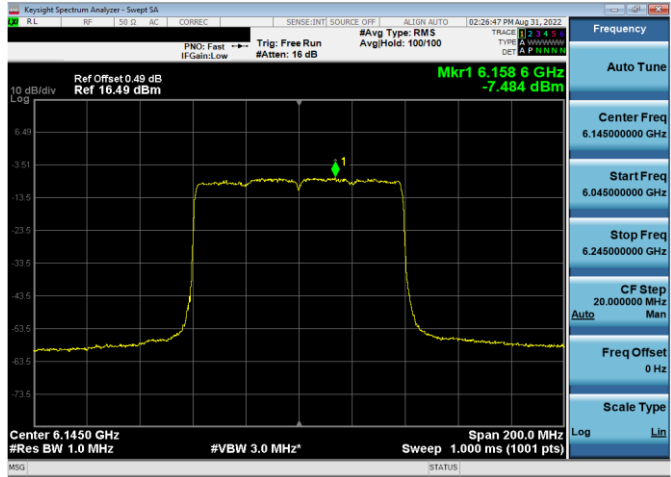


Plot 7-124. Power Spectral Density Plot Antenna WF5t (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS2)

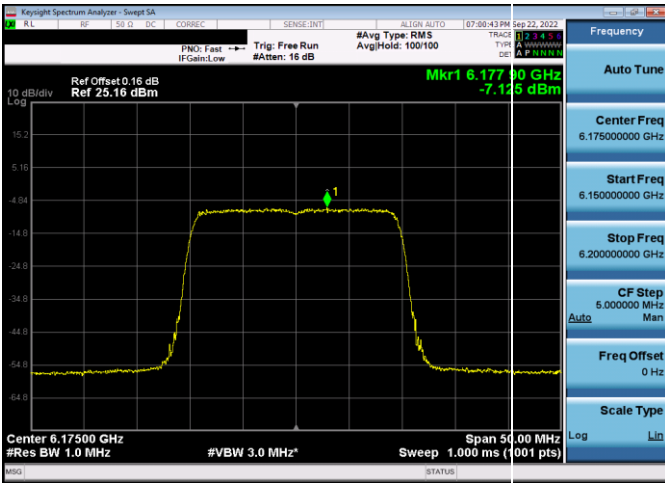


Plot 7-122. Power Spectral Density Plot Antenna WF5t (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS2)

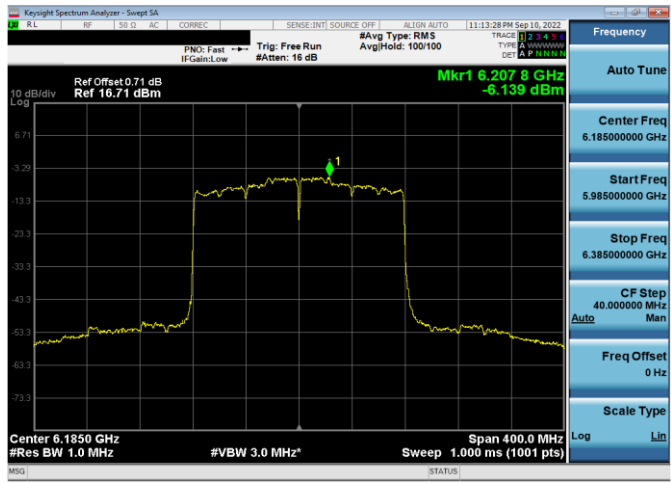

Plot 7-125. Power Spectral Density Plot Antenna WF5t (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS2)

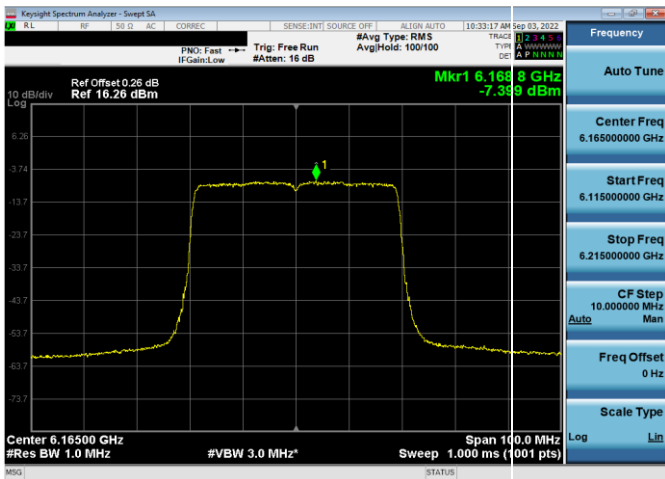


Plot 7-123. Power Spectral Density Plot Antenna WF5t (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS2)

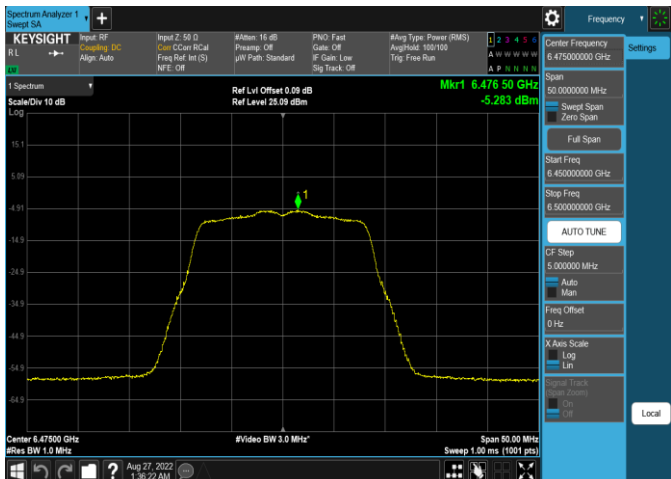


Plot 7-126. Power Spectral Density Plot Antenna WF5t (20MHz 802.11a (UNII Band 6) – Ch. 105, 12Mbps)


FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 68 of 280

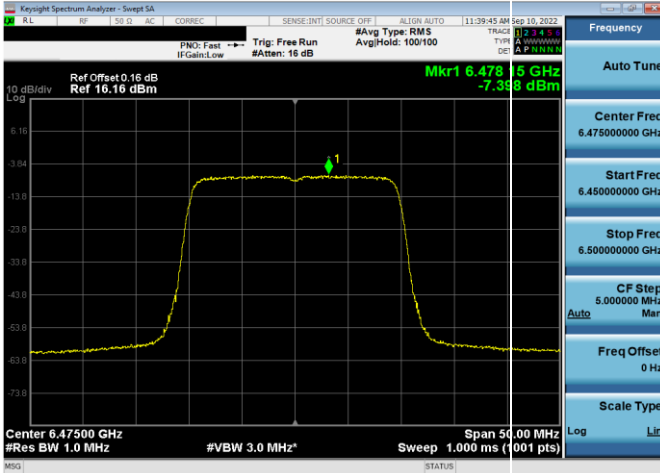


Plot 7-127. Power Spectral Density Plot Antenna WF5t (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS2)

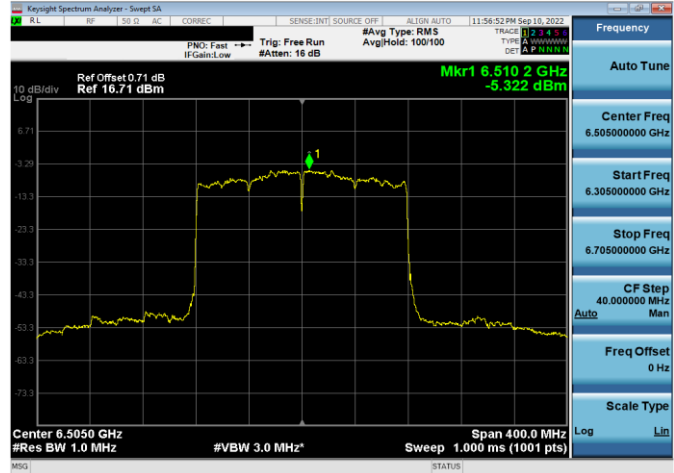


Plot 7-130. Power Spectral Density Plot Antenna WF5t (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS2)

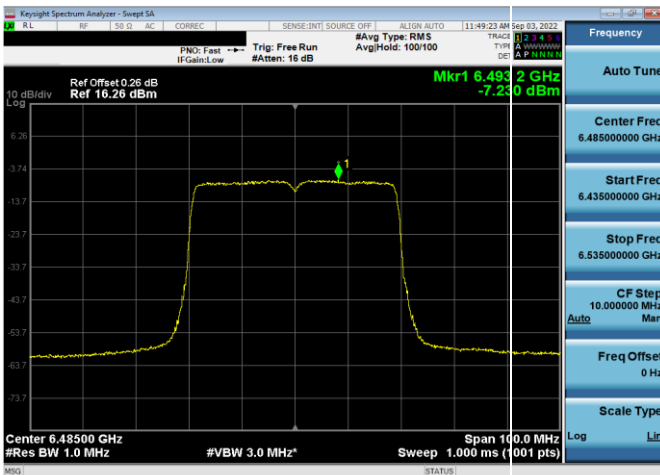


Plot 7-128. Power Spectral Density Plot Antenna WF5t (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS2)

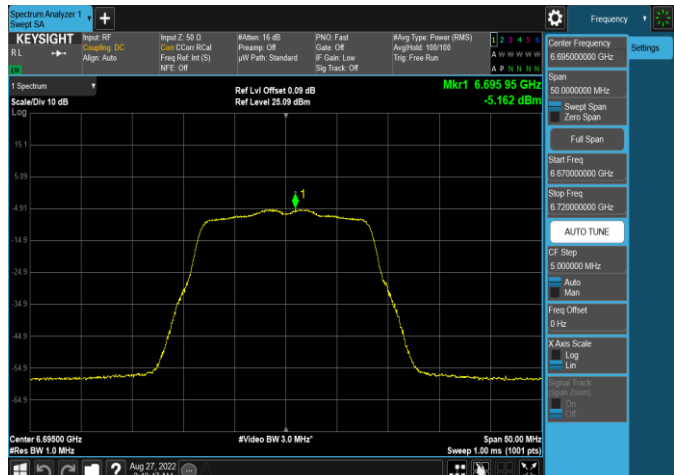

Plot 7-131. Power Spectral Density Plot Antenna WF5t (20MHz 802.11a (UNII Band 7) – Ch. 149, 12Mbps)

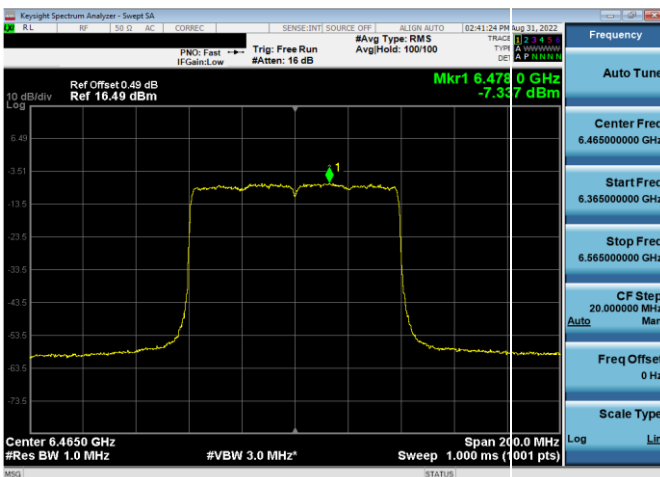

Plot 7-129. Power Spectral Density Plot Antenna WF5t (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS2)

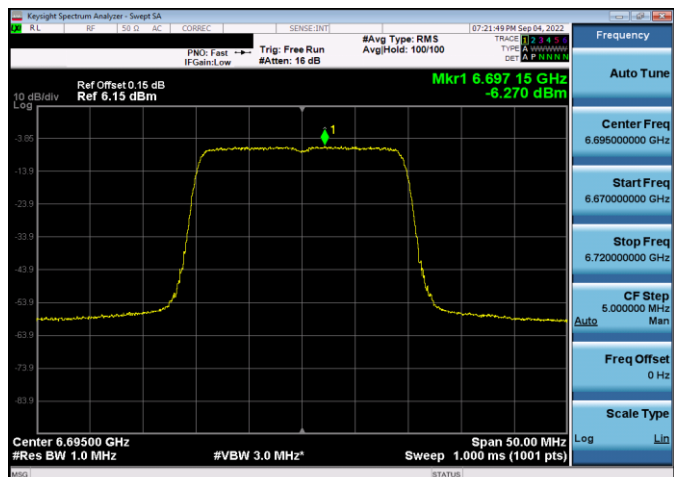

Plot 7-132. Power Spectral Density Plot Antenna WF5t (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS2)

FCC ID: BCGA2759 IC: 579C-A2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090024-11-R3.BCG	Test Dates: 05/27/2022 - 9/26/2022	EUT Type: Tablet Device	Page 69 of 280