

## DATA REFERENCE REPORT PART 22

**Applicant Name:**

Apple Inc.  
 One Apple Park Way  
 Cupertino, CA 95014  
 United States

**Date of Testing:**

05/30/2022 - 08/29/2022

**Test Site/Location:**

Element Washington DC LLC, Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2205090026-01.BCG

<b>FCC ID:</b>	<b>BCGA2761</b>
<b>Applicant Name:</b>	<b>Apple Inc.</b>

**Reference Model:**

A2435

**Variant Model:**

A2761 (A2762)

**EUT Type:**

Tablet Device

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**FCC Rule Part:**

22

**Test Procedure(s):**

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez  
 Executive Vice President



FCC ID: BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 1 of 17

## TABLE OF CONTENTS

1.0	INTRODUCTION .....	3
1.1	Scope .....	3
1.2	Element Washington DC LLC Test Location .....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities.....	4
2.3	Antenna Description .....	5
2.4	Test Support Equipment.....	5
2.5	Test Configuration .....	6
2.6	Software and Firmware .....	6
2.7	EMI Suppression Device(s)/Modifications .....	6
3.0	DESCRIPTION OF TESTS .....	7
3.1	Measurement Procedure.....	7
3.2	Radiated Spurious Emissions .....	7
4.0	MEASUREMENT UNCERTAINTY .....	8
5.0	TEST EQUIPMENT CALIBRATION DATA .....	9
6.0	SAMPLE CALCULATIONS .....	10
7.0	TEST RESULTS (SPOT-CHECK DATA) .....	11
7.1	Summary.....	11
7.2	Antenna 3 Radiated Spurious Emissions .....	13
7.3	Antenna 3 – ERP/EIRP .....	14
7.4	Antenna 1 – ERP/EIRP .....	15
8.0	CONCLUSION.....	16
9.0	APPENDIX A: REFERENCE MODEL TEST REPORT.....	17

<b>FCC ID:</b> BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090026-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device
		Page 2 of 17

## 1.0 INTRODUCTION

### 1.1 Scope

Per manufacturer declaration, there are two tablet device models, A2435 and A2761 (A2762), with high degree of similarity, reference model FCC ID: BCGA2435 and variant model **FCC ID: BCGA2761**. The reference models support mmWave operations, while the variant models have the mmWave components/antennas removed. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCGA2435, while radiated and conducted spot-check verification has been performed on variant model FCC ID: BCGA2761. Spot-check measurements were conducted, all measurements were investigated and found to be within acceptable tolerance.

Equipment Class	Reference Model FCC ID	Reference Report	Report Title
PCB	BCGA2435	1C2205090025-01.BCG	RF Part 22 Test Report

**Table 1-1. Reference Model Details**

Reference model FCC ID: BCGA2435 test report has been included in Appendix A

### 1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 3 of 17

Version 2.1 11/9/2021

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID:BCGA2761**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

**Test Device Serial No.:** X3JD904MC6, W9XP4WKKX6, W7NCJD7FYQ, DLX2254004Z21NF15

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WiFi 2.4GHz	Bluetooth	NB UNII	WiFi 5GHz	WiFi 6GHz	LTE / FR1 NR
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	BDR, HDR4/8	802.11 a/n/ac/ax	802.11 a/ax	Ultra High Band
2a	Config 1	✓	✗	✗	✗	✗	✓
2a	Config 2	✗	✓	✗	✗	✗	✓
4a	Config 3	✓	✗	✓	✗	✗	✗
4a	Config 4	✗	✓	✗	✓	✗	✗

**Table 2-1. Simultaneous Transmission Configurations**

✓ = Support; ✗ = Not Support

#### Note:

1. All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Bluetooth and LTE B48. Results can be found on RF Bluetooth and RF Part 96 Test Reports.
2. Wi-Fi 2.4GHz and Bluetooth 2.4 GHz can transmit simultaneously on separate antennas. For BT (2.4 GHz) in connected mode and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4 GHz) in disconnected mode and Wi-Fi (2.4 GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power.

FCC ID: BCGA2761	 PART 22 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 4 of 17

Version 2.1 11/9/2021

## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain [dBi]	
	Antenna 1	Antenna 3
WCDMA850	-2.6	-1.3
LTE Band5/26		
NR Band n5/26		

**Table 2-2. Highest Antenna Gain**

## 2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141 Model: A2166	S/N: S/N:	C02DV7VKMD6T N/A
2	Apple USB-C Cable	Model: Spartan	S/N:	000MKTR02U
3	USB-C Cable w/ AC Adapter	Model: A246 Model: A2305	S/N: S/N:	N/A N/A
4	Apple Pencil	Model: N/A	S/N:	GQXGSXBJKM9
5	DC Power Supply	Model: KPS3010D	S/N:	N/A

**Table 2-3. Test Support Equipment**

FCC ID: BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 5 of 17

Version 2.1 11/9/2021

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

Per FCC Approved Data Referencing Test Plan, Antennas 1 and 3 spot-check measurements have been conducted and reported. Spot-check Test Plan can be referred to below Table 2-3.

Technology	Test Case	Antenna / Modes	FCC ID: BCGA2761	
			Mode	Channel
WCDMA, LTE, FR1 Single Carrier & IntraBand ULCA	Radiated Spurious Emissions (>1GHz)	Max. conducted Power Antenna	LTE Band 5, 2, 7 Max BW, 1RB (QPSK-highest power)	Mid
	Radiated Spurious Emissions (<1GHz)		LTE Band 5, 2, 7 Max BW, 1RB (QPSK-highest power)	Mid
	Conducted Power ERP/EIRP	All possible Antenna Configurations	LTE Band 5, 2, 7 Max BW, 1RB (QPSK-highest power)	Mid

**Table 2-4. FCC Approved Spot-Check Test Plan**

Output powers were measured and confirmed to be consistent between Reference and Variant models prior to testing.

## 2.6 Software and Firmware

The test was conducted with firmware version 20A8359 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 6 of 17

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI C63.26-2015/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

### 3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8;$$

Where D is the measurement distance in meters.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 7 of 17

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCGA2761	 PART 22 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 8 of 17

Version 2.1 11/9/2021

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	1/19/2022	Annual	1/19/2023	T058701-02
ETS-Lindgren	3142E	Biconilog Antenna (26-6000MHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18GHz)	10/25/2021	Annual	10/25/2022	227597
ETS-Lindgren	SU-241	Table Top Temperature Chamber	10/6/2021	Annual	10/6/2022	92009574
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz-6GHz)	1/6/2022	Annual	1/6/2023	102328
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	FSVA3044	Signal Analyzer (up to 44 GHz)	5/12/2022	Annual	5/12/2023	101098
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546
Rohde & Schwarz	TC-TA18	Cross-Polarized Antenna 400MHz-18GHz	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz-18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz-40GHz)	4/18/2022	Annual	4/18/2023	100050

**Table 5-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2761	 PART 22 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 9 of 17

## 6.0 SAMPLE CALCULATIONS

### Spurious Radiated Emission

#### Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: BCGA2761	 PART 22 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 10 of 17

Version 2.1 11/9/2021

## 7.0 TEST RESULTS (SPOT-CHECK DATA)

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2761  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): WCDMA/NR/LTE

Technology	Test Configurations					Reference Model	Variant Model	Delta
	Test Description	Modulation	BW / RB Config	Channel	Measurement Frequency [MHz]	FCC ID: BCGA2435	FCC ID: BCGA2761	
						Average [dBm]	Average [dBm]	Average [dB]
LTE-B5	Radiated Spurious Emissions	QPSK	10MHz / 1/25 RB	M	2509.5	-58.70	-59.28	0.58
LTE-B5	Conducted Powers	QPSK	10MHz / 1/49 RB	M	836.5	25.65	25.49	0.16
WCDMA B5	Conducted Powers	QPSK	5MHz	M	836.6	25.57	25.39	0.18
NR B5	Conducted Powers	QPSK	20MHz / 1/1 RB	M	836.5	25.31	25.61	0.30

**Table 7-1. Worst Case Antenna 3 Spot-Check Results**

Technology	Test Configurations (PCC)					Test Configurations (SCC)					Reference Model	Variant Model	Delta
	Test Description	Modulation	BW / RB Config	Channel	Measurement Frequency [MHz]	Test Description	Modulation	BW / RB Config	Channel	Measurement Frequency [MHz]	FCC ID: BCGA2435	FCC ID: BCGA2671	
											Average [dBm]	Average [dBm]	Average [dB]
ULCA - LTE Band 5	Conducted Powers	QPSK	10MHz / 1/49 RB	M	831.5	Conducted Powers	QPSK	10MHz / 1/0 RB	M	841.4	25.53	25.25	0.28

**Table 7-2. Worst Case Antenna 3 ULCA Spot-Check Results**

FCC ID: BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 11 of 17

Technology	Test Configurations					Reference Model	Variant Model	Delta
	Test Description	Modulation	BW / RB Config	Channel	Measurement Frequency [MHz]	FCC ID: BCGA2435	FCC ID: BCGA2761	
						Average [dBm]	Average [dBm]	Average [dB]
LTE-B5	Conducted Powers	QPSK	10MHz / 1/49 RB	M	836.5	23.73	23.65	0.08
WCDMA B5	Conducted Powers	QPSK	5MHz	M	836.5	23.87	23.58	0.29
NR B5	Conducted Powers	QPSK	5MHz / 1/1 RB	M	836.5	23.42	23.59	0.17

**Table 7-3. Worst Case Antenna 1 Spot-Check Results**

Technology	Test Configurations (PCC)					Test Configurations (SCC)					Reference Model	Variant Model	Delta
	Test Description	Modulation	BW / RB Config	Channel	Measurement Frequency [MHz]	Test Description	Modulation	BW / RB Config	Channel	Measurement Frequency [MHz]	FCC ID: BCGA2435	FCC ID: BCGA2671	Average [dB]
											Average [dBm]	Average [dBm]	
ULCA - LTE Band 5	Conducted Powers	QPSK	10MHz / 1/49 RB	M	831.5	Conducted Powers	QPSK	10MHz / 1/0 RB	M	841.4	23.65	23.48	0.17

**Table 7-4. Worst Case Antenna 1 ULCA Spot-Check Results**


Spot-checks were conducted, all measurements were investigated and found to be within acceptable tolerance in accordance with FCC Approved Data Referencing Test Plan.

FCC ID: BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 12 of 17


## 7.2 Antenna 3 Radiated Spurious Emissions

§2.1053, 22.917(a)

### LTE-B5

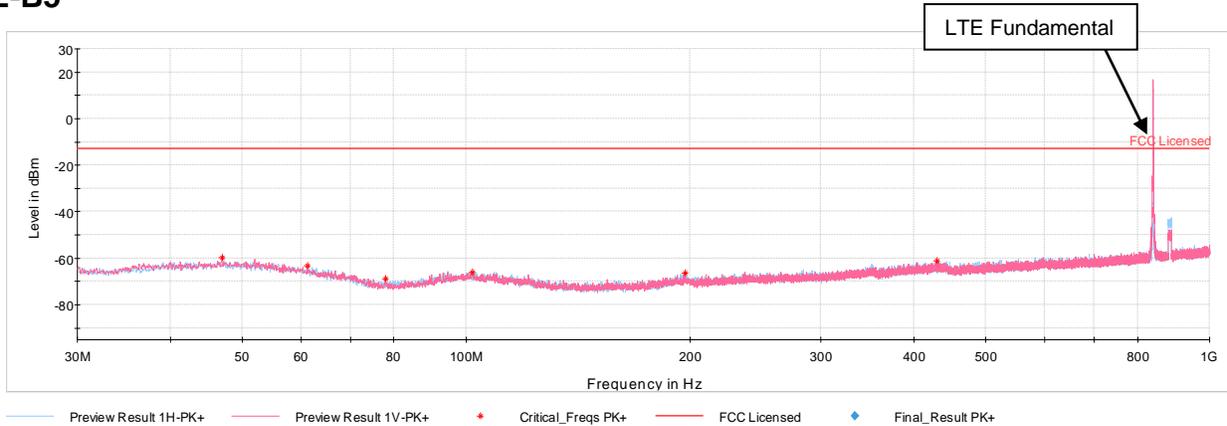

**Plot 7-1. Antenna 3 Radiated Spurious Plot below 1GHz (LTE Band 5)**

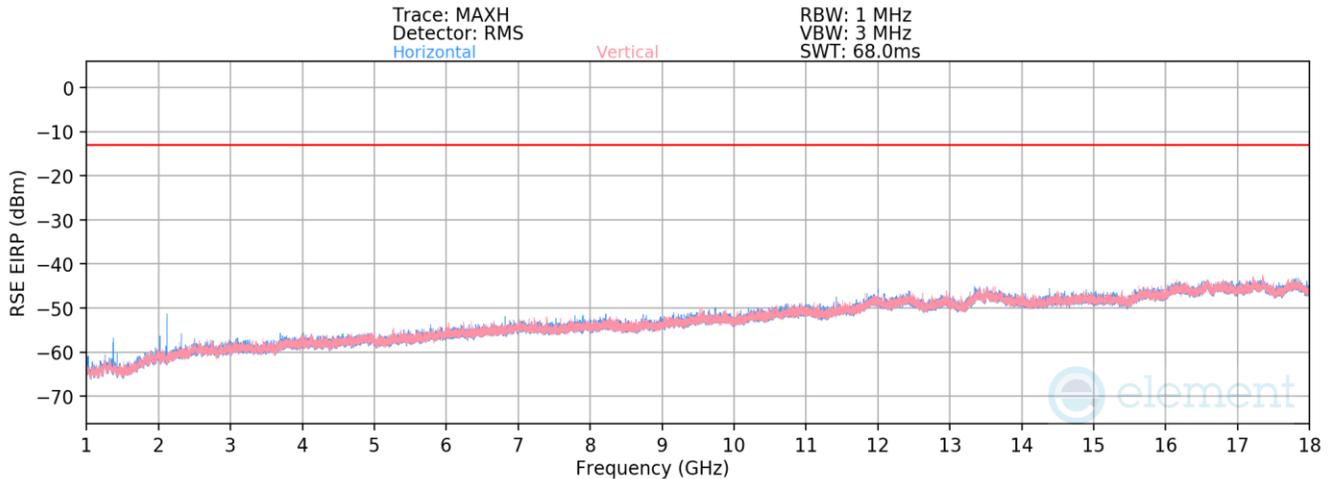

**Plot 7-2. Antenna 3 Radiated Spurious Emission above 1GHz (LTE Band 5)**

Bandwidth (MHz):	10
Frequency (MHz):	836.5
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.0	H	-	-	-77.56	-2.50	26.94	-68.32	-13.00	-55.32
2509.5	V	396	262	-73.37	2.35	35.98	-59.28	-13.00	-46.28
3346.0	H	-	-	-79.39	3.12	30.73	-64.52	-13.00	-51.52
4182.5	H	-	-	-80.19	5.41	32.22	-63.04	-13.00	-50.04
5019.0	H	-	-	-80.65	6.08	32.43	-62.83	-13.00	-49.83

**Table 7-5. Antenna 3 Radiated Spurious Data (LTE Band 5 – Mid Channel)**

FCC ID: BCGA2761	 PART 22 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 13 of 17

### 7.3 Antenna 3 – ERP/EIRP

#### LTE-B5

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
10 MHz	QPSK	836.5	-1.30	1 / 49	25.49	22.04	0.160	38.45	-16.41	24.19	0.262	40.61	-16.42

Table 7-6. Antenna 3 ERP/EIRP Data (LTE Band 5)

#### WCDMA Band 5

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
836.60	WCDMA850	25.39	-1.30	21.94	0.156	38.45	-16.51	24.09	0.256	40.61	-16.52

Table 7-7. Antenna 3 ERP/EIRP Data (WCDMA Band 5)

#### NR Band 5

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	836.5	-1.30	1 / 1	25.61	22.16	0.164	38.45	-16.29	24.31	0.270	40.61	-16.30

Table 7-8. Antenna 3 ERP/EIRP Data (NR Band n5)

#### ULCA - LTE-B5

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Tx. Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]		
			Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency											UL # RB	UL RB Offset
Max	LTE B5	10MHz + 10MHz	QPSK	20475	831.5	1	49	QPSK	20574	841.4	1	0	25.25	-1.30	21.80	0.151	38.45	-16.65	23.95	0.248	40.61	-16.66

Table 7-9. Antenna 3 ERP/EIRP Data (ULCA LTE Band n5)

FCC ID: BCGA2761	 PART 22 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 14 of 17

## 7.4 Antenna 1 – ERP/EIRP

### LTE-B5

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
10 MHz	QPSK	836.5	-2.60	1 / 49	23.65	18.90	0.078	38.45	-19.55	21.05	0.127	40.61	-19.56

Table 7-10. Antenna 1 ERP/EIRP Data (LTE Band 5)

### WCDMA Band 5

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
836.60	WCDMA850	23.58	-2.60	18.83	0.076	38.45	-19.62	20.98	0.125	40.61	-19.63

Table 7-11. Antenna 1 ERP/EIRP Data (WCDMA Band 5)

### NR Band 5

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	836.5	-2.60	1 / 1	23.59	18.84	0.077	38.45	-19.61	20.99	0.126	40.61	-19.62

Table 7-12. Antenna 1 ERP/EIRP Data (NR Band n5)

### ULCA - LTE-B5

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Tx. Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]		
			Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency											UL # RB	UL RB Offset
Max	LTE B5	10MHz + 10MHz	QPSK	20475	831.5	1	49	QPSK	20574	841.4	1	0	23.48	-2.60	18.73	0.075	38.45	-19.72	20.88	0.122	40.61	-19.73

Table 7-13. Antenna 3 ERP/EIRP Data (ULCA LTE Band n5)

FCC ID: BCGA2761	 PART 22 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 15 of 17

## 8.0 CONCLUSION

The spot-check data measured for variant model **FCC ID: BCGA2761** is in tolerance with reference model FCC ID: BCGA2435 per FCC Approved Data Referencing Test Plan.

<b>FCC ID:</b> BCGA2761	 <b>element</b> PART 22 DATA REFERENCE REPORT	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090026-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device

Version 2.1 11/9/2021

## 9.0 APPENDIX A: REFERENCE MODEL TEST REPORT

Attached is the test report (1C2205090025-01.BCG) from reference model FCC ID: BCGA2435, which includes referenced data results.

<b>FCC ID:</b> BCGA2761	 <b>PART 22 DATA REFERENCE REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090026-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device

Version 2.1 11/9/2021



# Element Washington DC LLC

18855 Adams Court, Morgan Hill, CA 95037 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>



## PART 22 MEASUREMENT REPORT

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

05/30/2022 - 08/29/2022

**Test Site/Location:**

Element Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2205090025-01.BCG

**FCC ID:**

**BCGA2435**

**Applicant Name:**

**Apple Inc.**

**Application Type:**

Certification

**Model:**

A2435

**EUT Type:**

Tablet Device

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**FCC Rule Part:**

22

**Test Procedure(s):**

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez  
Executive Vice President



<b>FCC ID:</b> BCGA2435	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 1 of 108


Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


# TABLE OF CONTENTS

1.0	INTRODUCTION .....	5
1.1	Scope .....	5
1.2	Element Washington DC LLC Test Location .....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description .....	6
2.2	Device Capabilities.....	6
2.3	Antenna Description .....	7
2.4	Test Support Equipment.....	7
2.5	Test Configuration .....	8
2.6	Software and Firmware .....	8
2.7	EMI Suppression Device(s)/Modifications .....	8
3.0	DESCRIPTION OF TESTS .....	9
3.1	Measurement Procedure.....	9
3.2	Radiated Spurious Emissions .....	9
4.0	MEASUREMENT UNCERTAINTY .....	10
5.0	TEST EQUIPMENT CALIBRATION DATA .....	11
6.0	SAMPLE CALCULATIONS .....	12
7.0	TEST RESULTS.....	13
7.1	Summary.....	13
7.2	Occupied Bandwidth .....	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	36
7.4	Band Edge Emissions at Antenna Terminal .....	61
7.5	Radiated Power (ERP/EIRP).....	79
7.6	Radiated Spurious Emissions .....	87
7.7	Frequency Stability / Temperature Variation .....	102
8.0	CONCLUSION.....	106
9.0	APPENDIX A .....	107

<b>FCC ID:</b> BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 2 of 108



# PART 22 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	ERP		EIRP		Emission Designator
					Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
WCDMA850	5 MHz	Spread Spectrum	826.4 - 846.6	4.1613	0.121	20.84	0.199	22.99	4M16F9W
Band 5	1.4 MHz	QPSK	824.7 - 848.3	1.1094	0.168	22.25	0.275	24.40	1M11G7W
		16QAM	824.7 - 848.3	1.1144	0.137	21.38	0.225	23.53	1M11D7W
		64QAM	824.7 - 848.3	1.0997	0.109	20.36	0.178	22.51	1M10D7W
		256QAM	824.7 - 848.3	1.1042	0.056	17.49	0.092	19.64	1M10D7W
	3 MHz	QPSK	825.5 - 847.5	2.7200	0.168	22.25	0.275	24.40	2M72G7W
		16QAM	825.5 - 847.5	2.7214	0.138	21.41	0.227	23.56	2M72D7W
		64QAM	825.5 - 847.5	2.7164	0.117	20.69	0.192	22.84	2M72D7W
		256QAM	825.5 - 847.5	2.7247	0.055	17.41	0.090	19.56	2M72D7W
	5 MHz	QPSK	826.5 - 846.5	4.5590	0.168	22.25	0.275	24.40	4M56G7W
		16QAM	826.5 - 846.5	4.5583	0.135	21.31	0.222	23.46	4M56D7W
		64QAM	826.5 - 846.5	4.5400	0.107	20.29	0.175	22.44	4M54D7W
		256QAM	826.5 - 846.5	4.5523	0.055	17.38	0.090	19.53	4M55D7W
	10 MHz	QPSK	829.0 - 844.0	9.0523	0.168	22.25	0.275	24.40	9M05G7W
		16QAM	829.0 - 844.0	9.0256	0.139	21.44	0.229	23.59	9M03D7W
		64QAM	829.0 - 844.0	9.0319	0.116	20.63	0.190	22.78	9M03D7W
		256QAM	829.0 - 844.0	9.0365	0.055	17.44	0.091	19.59	9M04D7W
Band 26	1.4 MHz	QPSK	824.7 - 848.3	1.1094	0.168	22.25	0.275	24.40	1M11G7W
		16QAM	824.7 - 848.3	1.1144	0.117	20.67	0.191	22.82	1M11D7W
		64QAM	824.7 - 848.3	1.0997	0.104	20.16	0.170	22.31	1M10D7W
		256QAM	824.7 - 848.3	1.1042	0.072	18.59	0.119	20.74	1M10D7W
	3 MHz	QPSK	825.5 - 847.5	2.7200	0.168	22.25	0.275	24.40	2M72G7W
		16QAM	825.5 - 847.5	2.7214	0.115	20.62	0.189	22.77	2M72D7W
		64QAM	825.5 - 847.5	2.7164	0.104	20.18	0.171	22.33	2M72D7W
		256QAM	825.5 - 847.5	2.7247	0.072	18.56	0.118	20.71	2M72D7W
	5 MHz	QPSK	826.5 - 846.5	4.5590	0.168	22.25	0.275	24.40	4M56G7W
		16QAM	826.5 - 846.5	4.5583	0.111	20.44	0.182	22.59	4M56D7W
		64QAM	826.5 - 846.5	4.5400	0.098	19.90	0.160	22.05	4M54D7W
		256QAM	826.5 - 846.5	4.5523	0.071	18.49	0.116	20.64	4M55D7W
	10 MHz	QPSK	829.0 - 844.0	9.0523	0.168	22.25	0.275	24.40	9M05G7W
		16QAM	829.0 - 844.0	9.0256	0.116	20.63	0.190	22.78	9M03D7W
		64QAM	829.0 - 844.0	9.0319	0.102	20.08	0.167	22.23	9M03D7W
		256QAM	829.0 - 844.0	9.0365	0.071	18.52	0.117	20.67	9M04D7W
ULCA Band 5	10 + 10 MHz	QPSK	829.0 - 844.0	18.8940	0.165	22.17	0.270	24.32	18M9G7W
		16QAM	829.0 - 844.0	18.8620	0.084	19.26	0.138	21.41	18M9D7W
		64QAM	829.0 - 844.0	18.8460	0.085	19.27	0.139	21.42	18M8D7W
		256QAM	829.0 - 844.0	18.8480	0.056	17.45	0.091	19.60	18M8D7W

## EUT Overview

FCC ID: BCGA2435	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 3 of 108

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	ERP		EIRP		Emission Designator
					Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
NR Band n5	5 MHz	$\pi/2$ BPSK	826.5 - 846.5	4.5904	0.168	22.25	0.275	24.40	4M59G7W
		QPSK	826.5 - 846.5	4.5318	0.167	22.22	0.273	24.37	4M53G7W
		16QAM	826.5 - 846.5	4.5415	0.131	21.17	0.215	23.32	4M54D7W
		64QAM	826.5 - 846.5	4.5014	0.093	19.70	0.153	21.85	4M50D7W
		256QAM	826.5 - 846.5	4.5115	0.056	17.51	0.092	19.66	4M51D7W
	10 MHz	$\pi/2$ BPSK	829.0 - 844.0	9.0200	0.168	22.25	0.275	24.40	9M02G7W
		QPSK	829.0 - 844.0	9.0108	0.165	22.18	0.271	24.33	9M01G7W
		16QAM	829.0 - 844.0	9.0165	0.149	21.72	0.244	23.87	9M02D7W
		64QAM	829.0 - 844.0	9.0113	0.097	19.85	0.158	22.00	9M01D7W
		256QAM	829.0 - 844.0	8.9915	0.059	17.74	0.097	19.89	8M99D7W
	15 MHz	$\pi/2$ BPSK	831.5 - 841.5	13.4838	0.168	22.25	0.275	24.40	13M5G7W
		QPSK	831.5 - 841.5	14.2518	0.167	22.22	0.274	24.37	14M3G7W
		16QAM	831.5 - 841.5	14.1815	0.142	21.51	0.232	23.66	14M2D7W
		64QAM	831.5 - 841.5	14.1836	0.104	20.18	0.171	22.33	14M2D7W
		256QAM	831.5 - 841.5	14.1780	0.066	18.23	0.109	20.38	14M2D7W
	20 MHz	$\pi/2$ BPSK	834.0 - 839.0	18.0232	0.168	22.25	0.275	24.40	18M0G7W
		QPSK	834.0 - 839.0	18.9813	0.163	22.12	0.268	24.27	19M0G7W
		16QAM	834.0 - 839.0	19.0255	0.148	21.72	0.244	23.87	19M0D7W
		64QAM	834.0 - 839.0	18.9901	0.098	19.92	0.161	22.07	19M0D7W
		256QAM	834.0 - 839.0	19.0026	0.060	17.80	0.099	19.95	19M0D7W
NR Band n26	5 MHz	$\pi/2$ BPSK	826.5 - 846.5	4.5904	0.161	22.07	0.264	24.22	4M59G7W
		QPSK	826.5 - 846.5	4.5318	0.155	21.89	0.254	24.04	4M53G7W
		16QAM	826.5 - 846.5	4.5415	0.127	21.03	0.208	23.18	4M54D7W
		64QAM	826.5 - 846.5	4.5014	0.095	19.78	0.156	21.93	4M50D7W
		256QAM	826.5 - 846.5	4.5115	0.055	17.43	0.091	19.58	4M51D7W
	10 MHz	$\pi/2$ BPSK	829.0 - 844.0	9.0200	0.150	21.76	0.246	23.91	9M02G7W
		QPSK	829.0 - 844.0	9.0108	0.161	22.06	0.264	24.21	9M01G7W
		16QAM	829.0 - 844.0	9.0165	0.133	21.23	0.218	23.38	9M02D7W
		64QAM	829.0 - 844.0	9.0113	0.085	19.28	0.139	21.43	9M01D7W
		256QAM	829.0 - 844.0	8.9915	0.061	17.82	0.099	19.97	8M99D7W

### EUT Overview

FCC ID: BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 4 of 108

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

## 1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

## 1.3 Test Facility / Accreditations

**Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.**

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 5 of 108

Version 2.1 11/9/2021

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2435**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

**Test Device Serial No.:** MXYQDH6VMK, FL6Y63W99X, V68MLB20069

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1, FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WiFi 2.4GHz	Bluetooth	NB UNII	WiFi 5GHz	WiFi 6GHz	LTE / FR1 NR
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	BDR, HDR4/8	802.11 a/n/ac/ax	802.11 a/ax	Ultra High Band
2a	Config 1	✓	✗	✗	✗	✗	✓
2a	Config 2	✗	✓	✗	✗	✗	✓
4a	Config 3	✓	✗	✓	✗	✗	✗
4a	Config 4	✗	✓	✗	✓	✗	✗

**Table 2-1. Simultaneous Transmission Configurations**

✓ = Support; ✗ = Not Support

#### Note:

1. All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Bluetooth and LTE B48. Results can be found on RF Bluetooth and RF Part 96 Test Reports.
2. Wi-Fi 2.4GHz and Bluetooth 2.4 GHz can transmit simultaneously on separate antennas. For BT (2.4 GHz) in connected mode and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4 GHz) in disconnected mode and Wi-Fi (2.4 GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power.

FCC ID: BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 6 of 108

Version 2.1 11/9/2021

### 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain [dBi]	
	Antenna 1	Antenna 3
WCDMA850	-2.6	-1.3
LTE Band5/26		
NR Band n5/26		

**Table 2-2. Highest Antenna Gain**

### 2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141 Model: A2166	S/N: S/N:	C02DV7VKMD6T N/A
2	Apple USB-C Cable	Model: Spartan	S/N:	000MKTR02U
3	USB-C Cable w/ AC Adapter	Model: A246 Model: A2305	S/N: S/N:	N/A N/A
4	Apple Pencil	Model: N/A	S/N:	GQXGSXBJKM9
5	DC Power Supply	Model: KPS3010D	S/N:	N/A

**Table 2-3. Test Support Equipment**

FCC ID: BCGA2435		<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 7 of 108

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

## 2.6 Software and Firmware

The test was conducted with firmware version 20A8359 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

<b>FCC ID:</b> BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device
		Page 8 of 108

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI C63.26-2015/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....None**

### 3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

<b>FCC ID:</b> BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 9 of 108

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCGA2435	 PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 10 of 108

Version 2.1 11/9/2021

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	1/19/2022	Annual	1/19/2023	T058701-02
ETS-Lindgren	3142E	Biconilog Antenna (26-6000MHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18GHz)	10/25/2021	Annual	10/25/2022	227597
ETS-Lindgren	SU-241	Table Top Temperature Chamber	10/6/2021	Annual	10/6/2022	92009574
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz-6GHz)	1/6/2022	Annual	1/6/2023	102328
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	FSVA3044	Signal Analyzer (up to 44 GHz)	5/12/2022	Annual	5/12/2023	101098
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546
Rohde & Schwarz	TC-TA18	Cross-Polarized Antenna 400MHz-18GHz	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz-18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz-40GHz)	4/18/2022	Annual	4/18/2023	100050

**Table 5-1. Test Equipment**

**Notes:**

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 11 of 108

## 6.0 SAMPLE CALCULATIONS

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### $\pi/2$ BPSK / QPSK Modulation

**Emission Designator = 8M62G7W**

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

### QAM Modulation

**Emission Designator = 8M45D7W**

BW = 8.45 MHz

D = Amplitude/Angle Modulated

7 = Quantized/Digital Info

W = Combination of Any

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.50 dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: BCGA2435		<b>PART 22 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 12 of 108

Version 2.1 11/9/2021

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2435  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): WCDMA/NR/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	-13 dBm at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	< 7 Watts max. ERP	PASS	Section 7.5
	Frequency Stability	2.1055, 22.355	±2.5 ppm	PASS	Section 7.7
RADIATED	Radiated Spurious Emissions	2.1053, 22.917(a)	-13 dBm for all out-of-band emissions	PASS	Section 7.6

**Table 7-1. Summary of Test Results**

#### Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.1.

FCC ID: BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 13 of 108

Version 2.1 11/9/2021

## 7.2 Occupied Bandwidth

### §2.1049

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

#### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

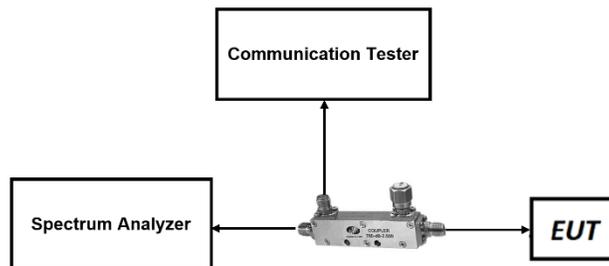

**Figure 7-1. Test Instrument & Measurement Setup**


#### Test Notes

None.


FCC ID: BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 14 of 108

Version 2.1 11/9/2021

# LTE Band 26/5

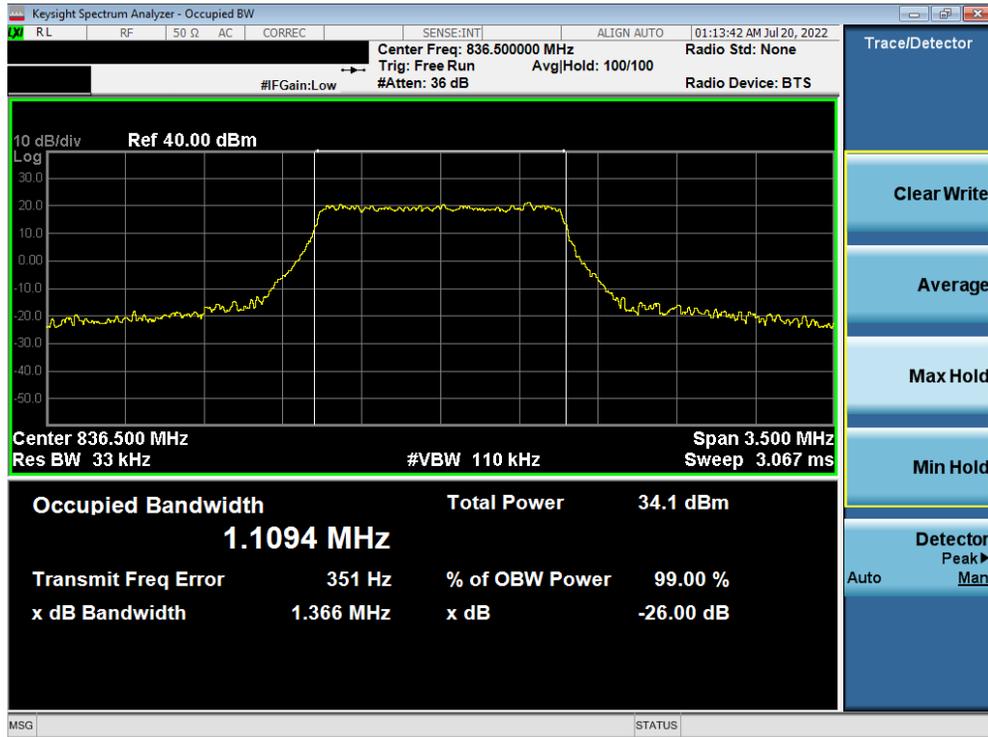

Plot 7-1. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB Configuration)

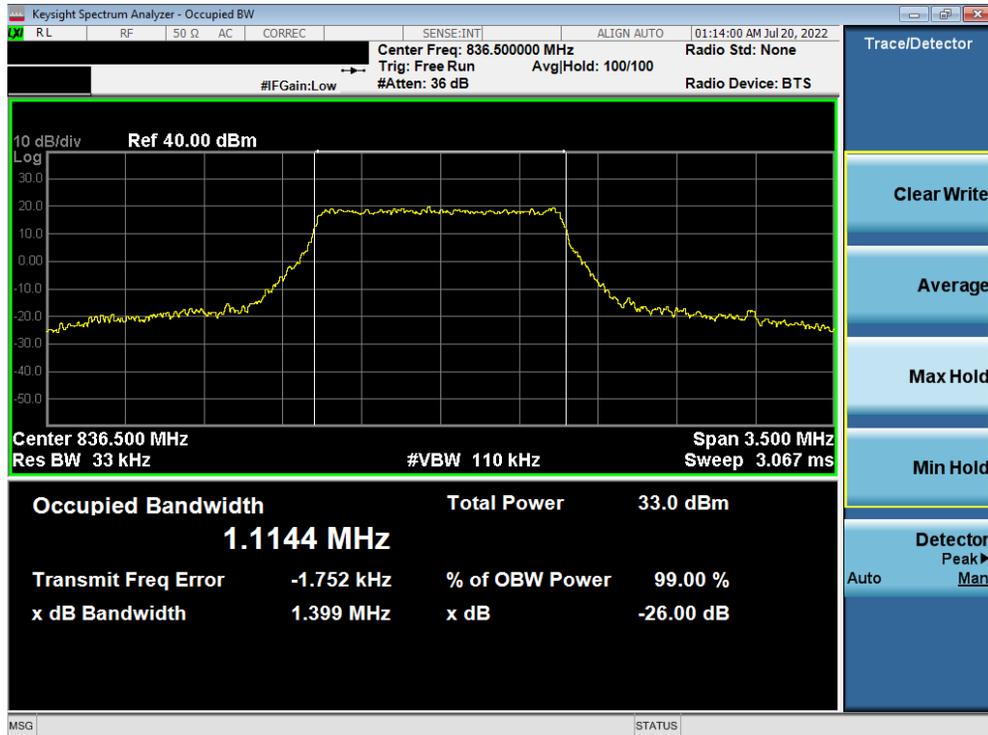


Plot 7-2. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 15 of 108




Plot 7-3. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 64-QAM - Full RB Configuration)

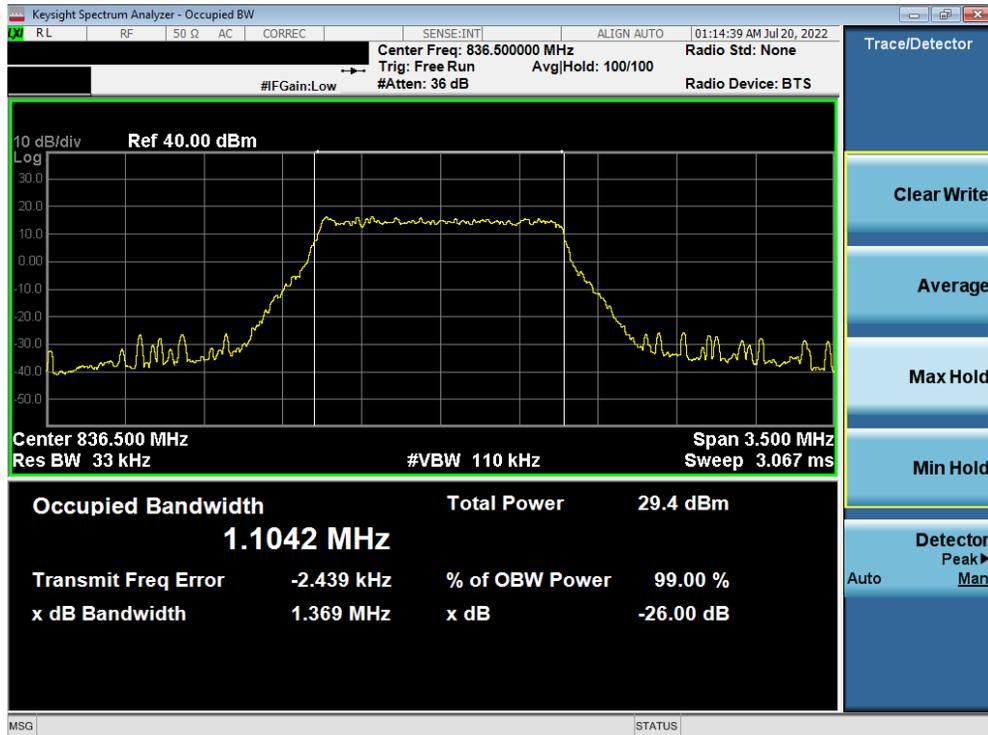

Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 16 of 108

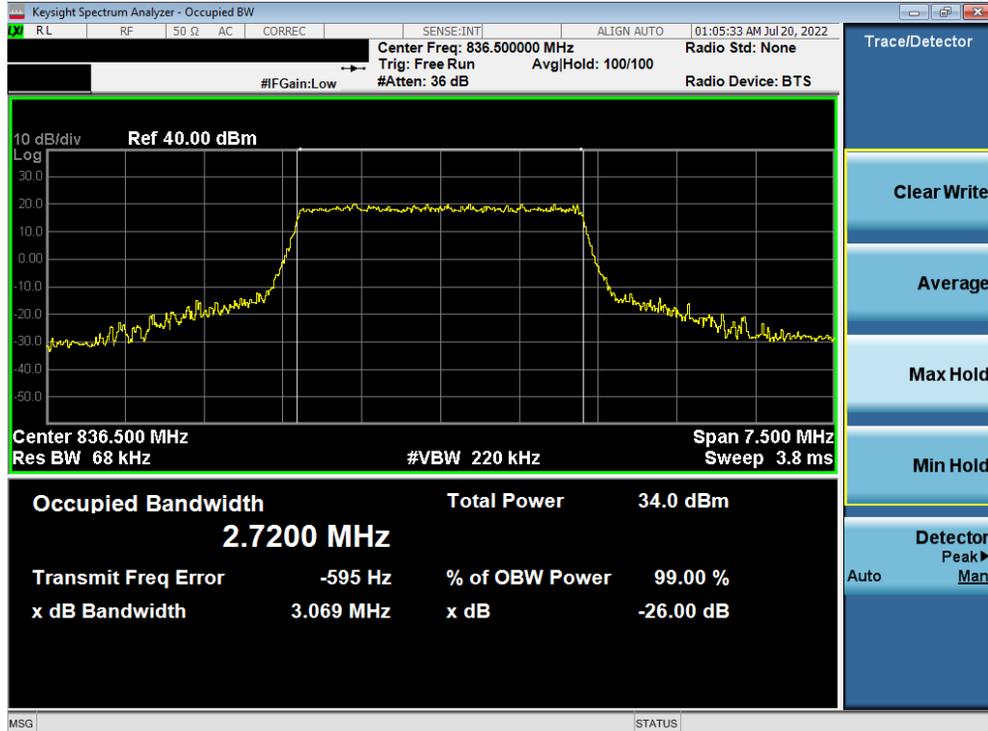


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB Configuration)




Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 17 of 108

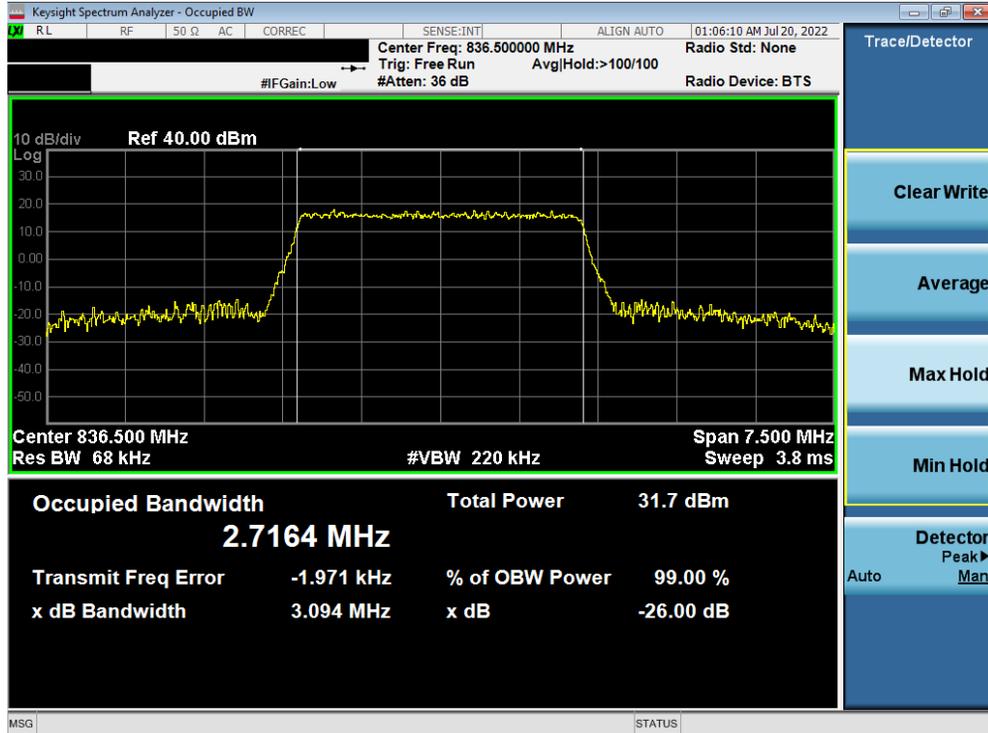


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 64-QAM - Full RB Configuration)

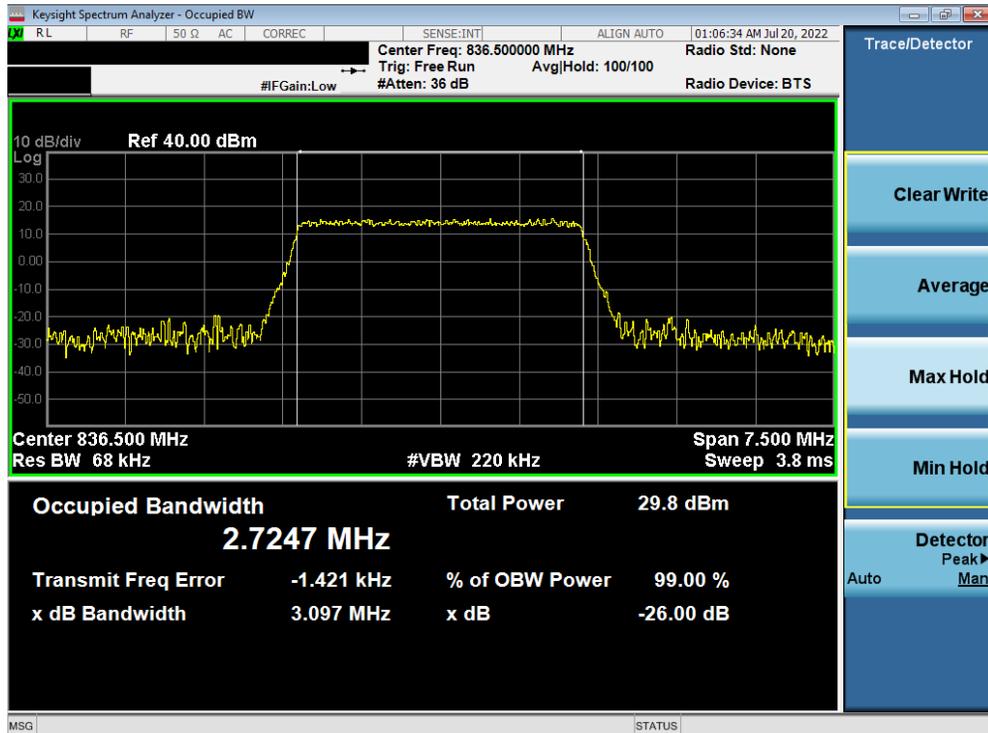


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 18 of 108

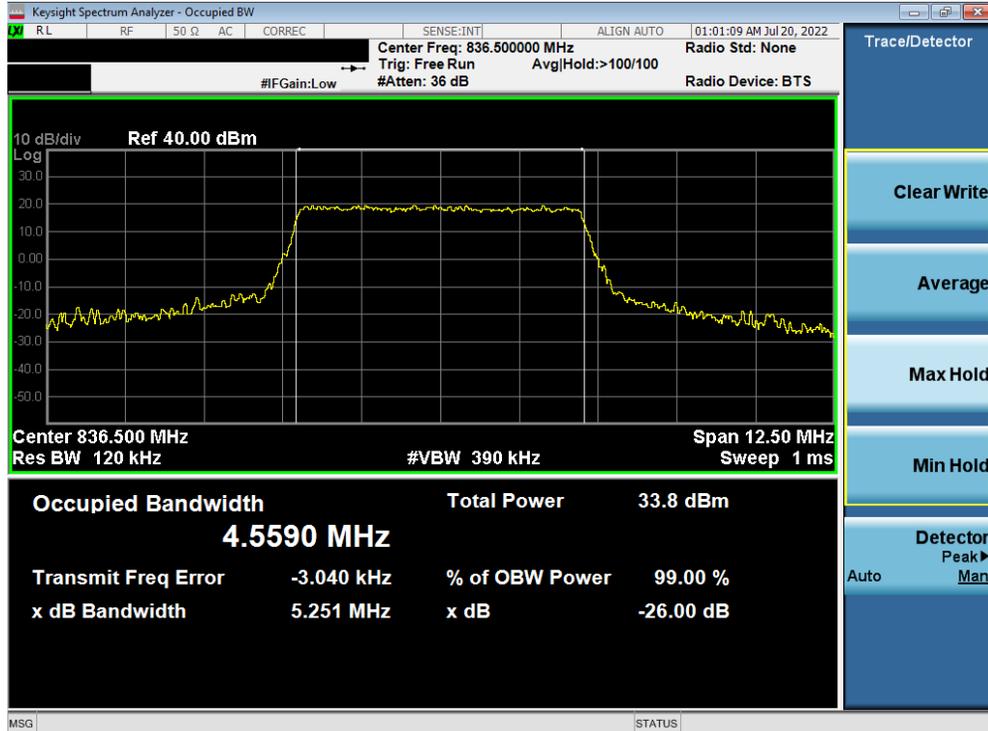


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB Configuration)

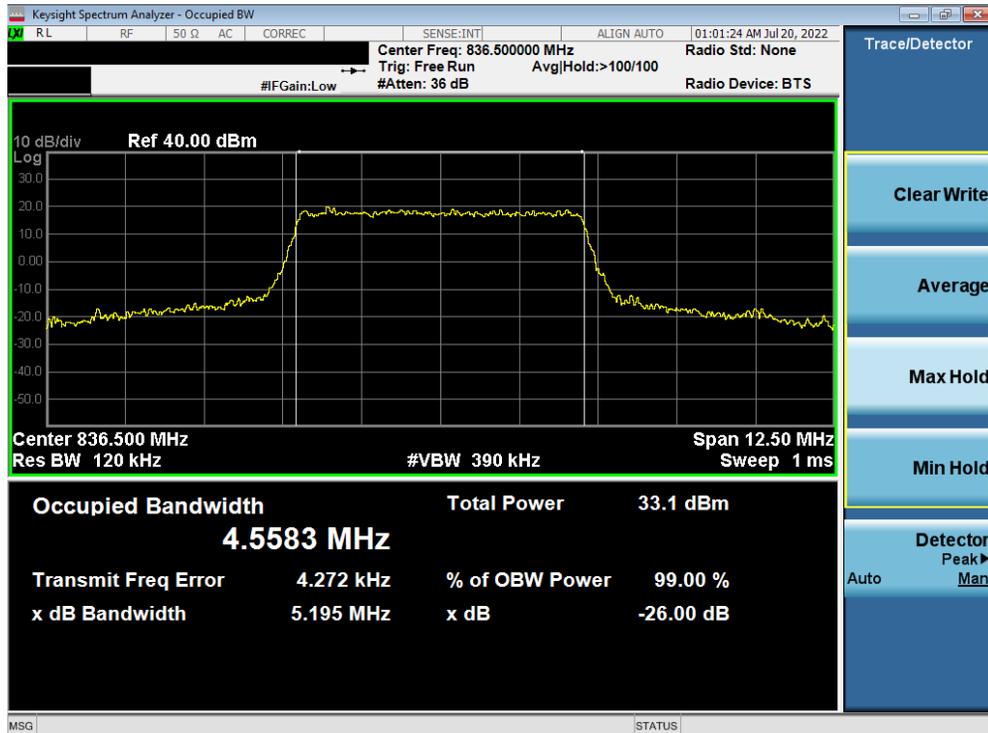


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 19 of 108

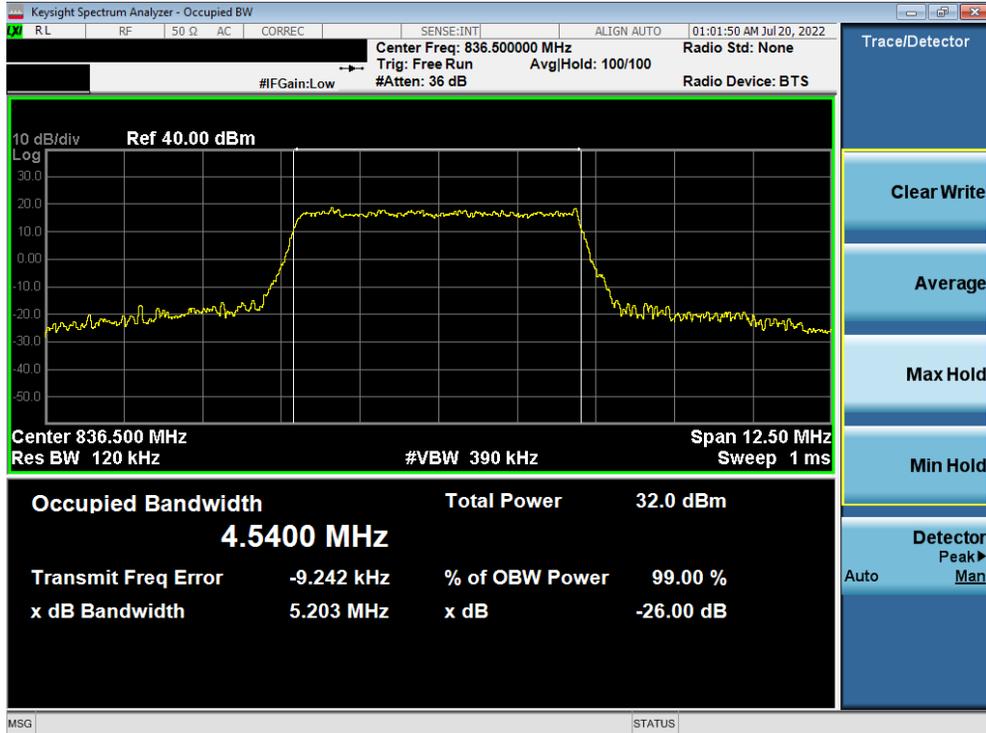


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 64-QAM - Full RB Configuration)

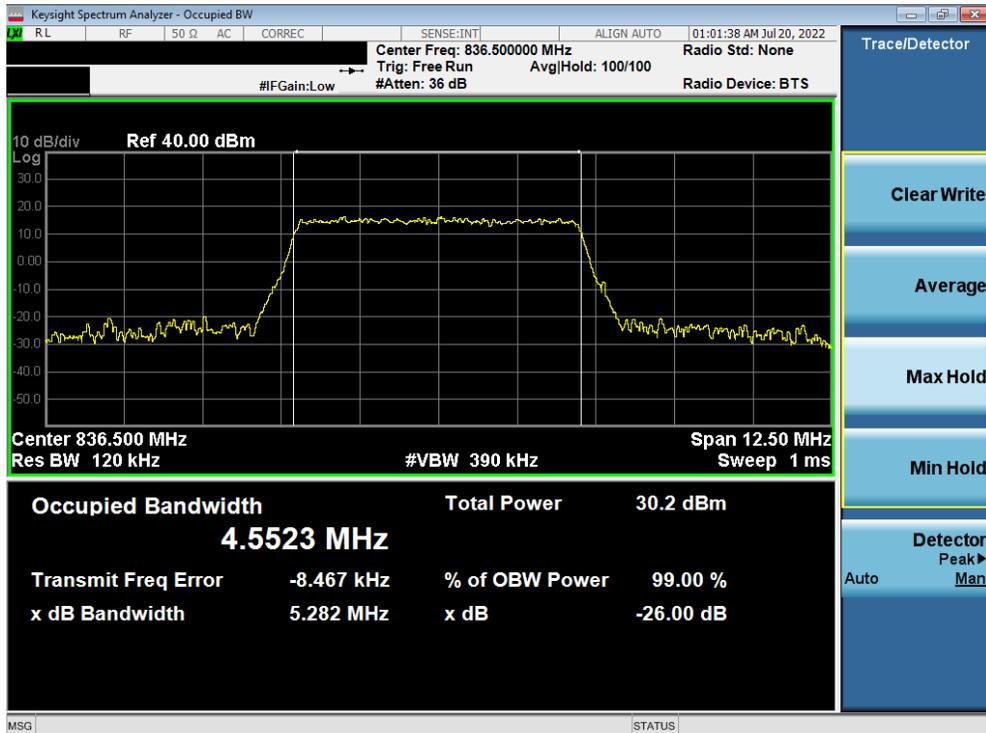

Plot 7-12. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 20 of 108

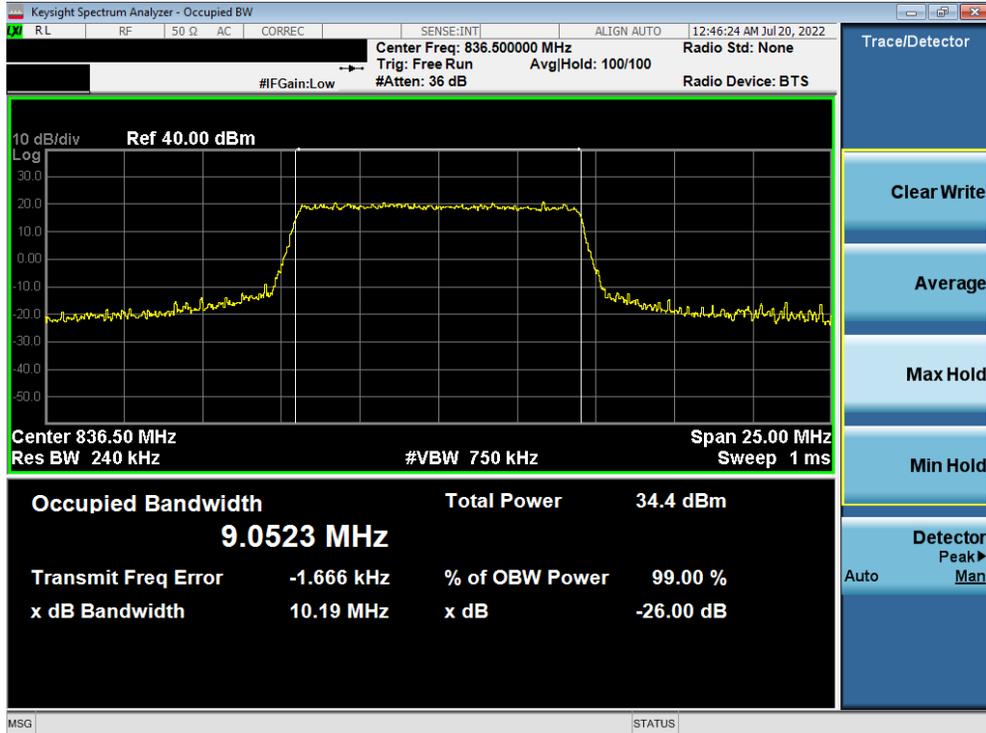

Plot 7-13. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB Configuration)



Plot 7-14. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 21 of 108



Plot 7-15. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 64-QAM - Full RB Configuration)




Plot 7-16. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 22 of 108

# NR Band n26/n5



Plot 7-17. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz DFT-s-OFDM  $\pi/2$  BPSK - Full RB Configuration)

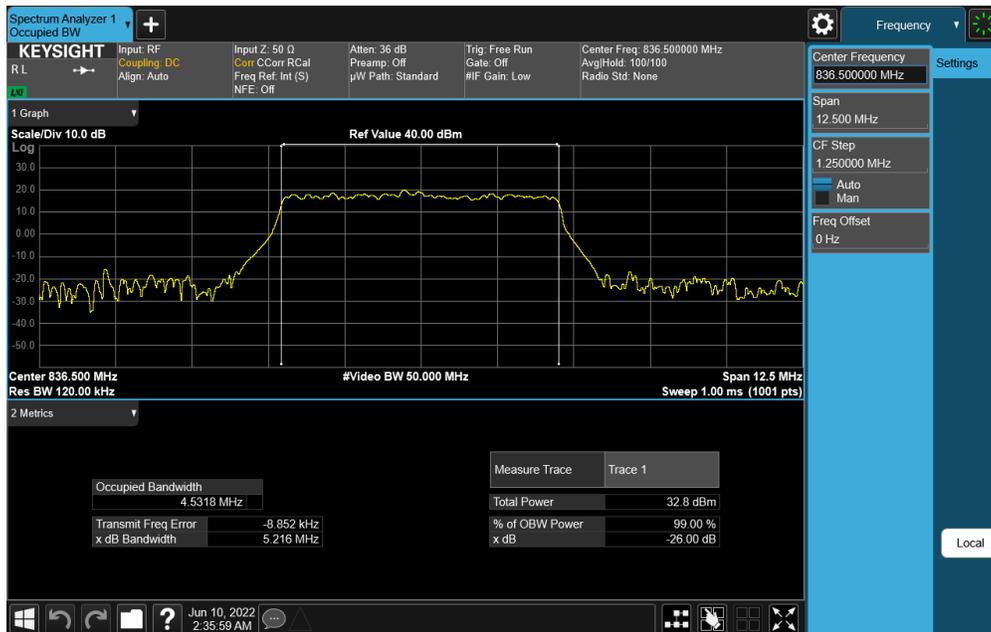


Plot 7-18. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz DFT-s-OFDM QPSK - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 23 of 108




Plot 7-19. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz CP-OFDM 16-QAM - Full RB Configuration)

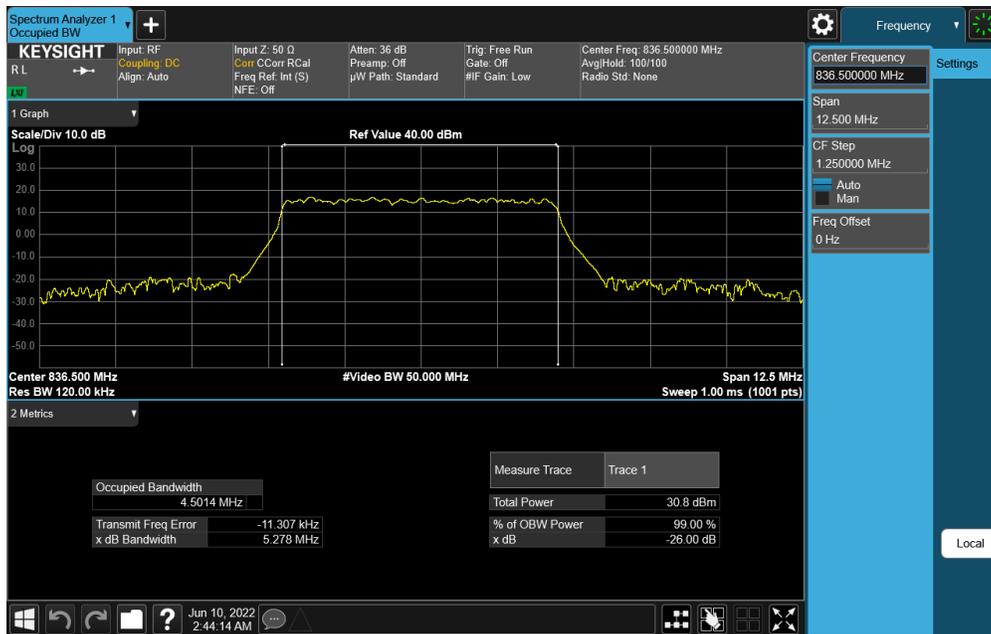

Plot 7-20. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz CP-OFDM 64-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 24 of 108

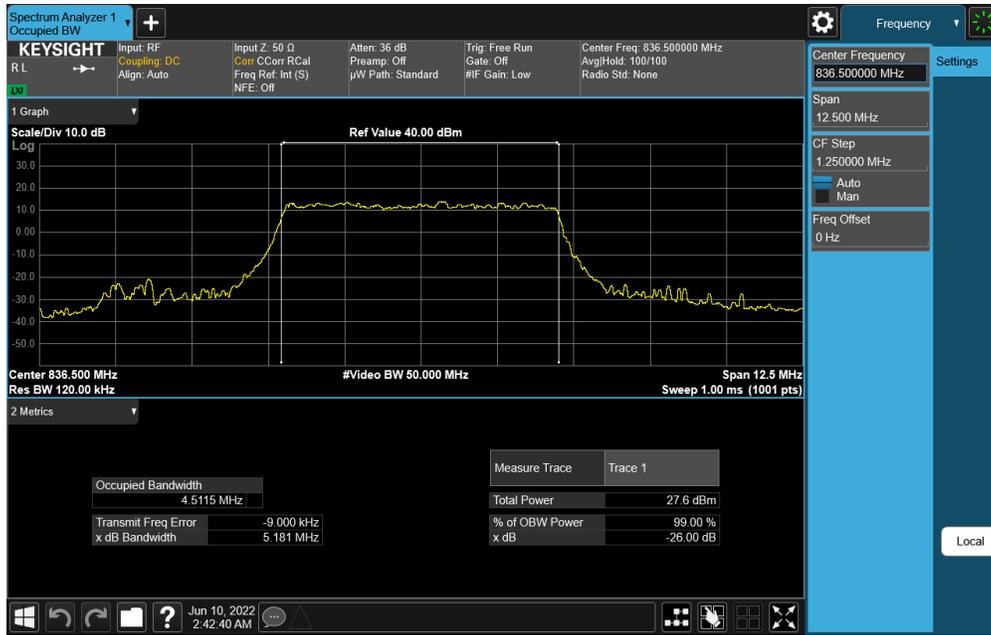


Plot 7-21. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz CP-OFDM 256-QAM - Full RB Configuration)




Plot 7-22. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz DFT-s-OFDM  $\pi/2$  BPSK - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 25 of 108

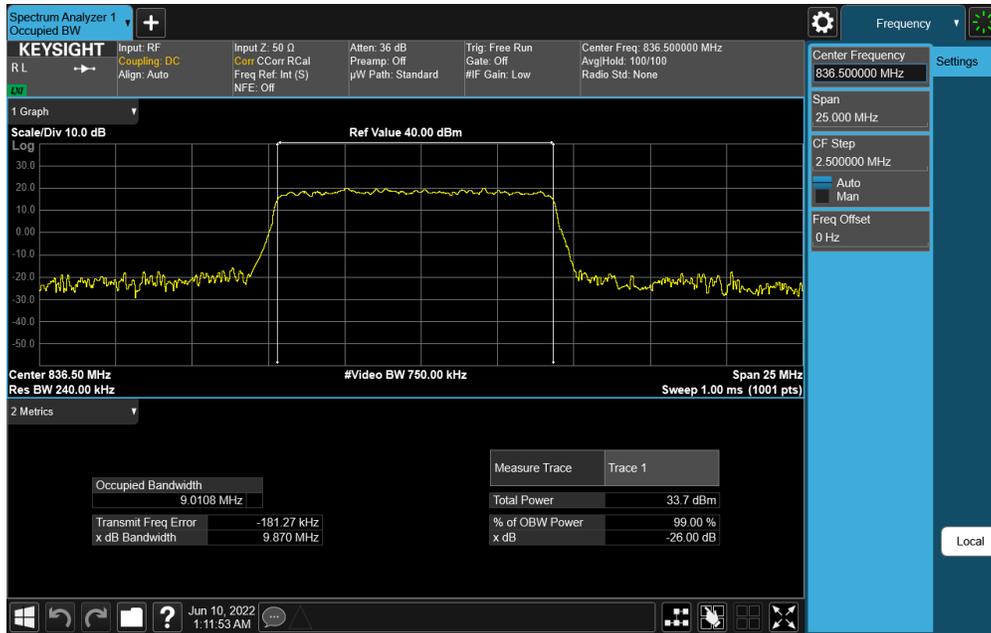


Plot 7-23. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz DFT-s-OFDM QPSK - Full RB Configuration)

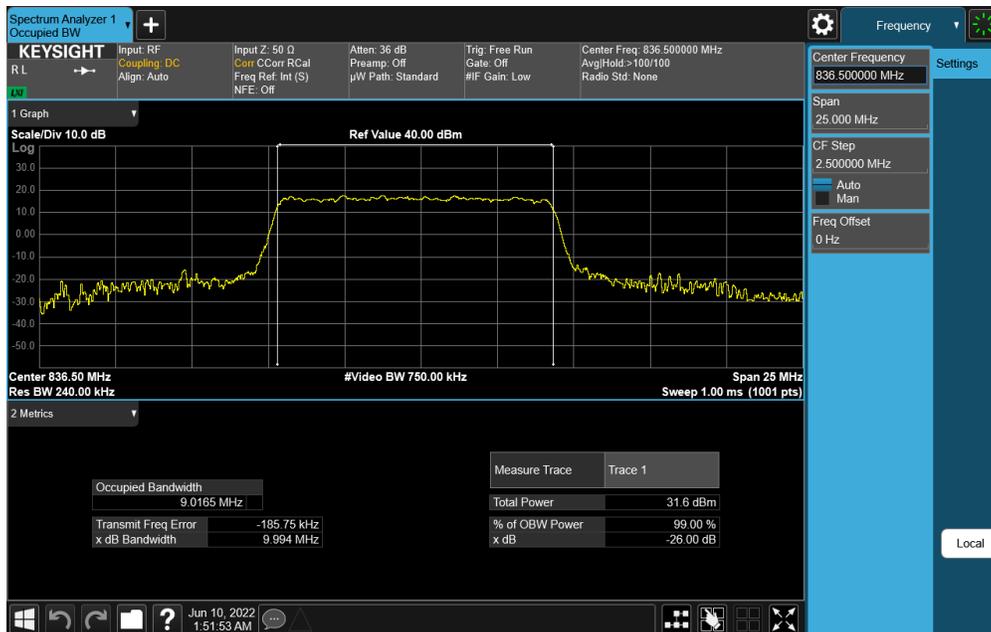


Plot 7-24. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz CP-OFDM 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 26 of 108

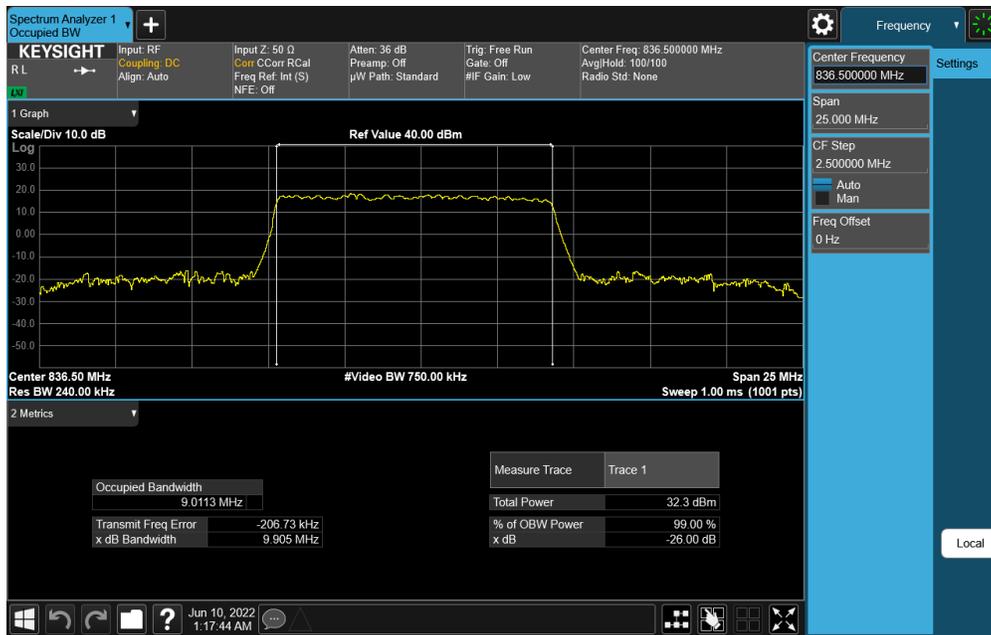


Plot 7-25. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz DFT-s-OFDM 64-QAM - Full RB Configuration)

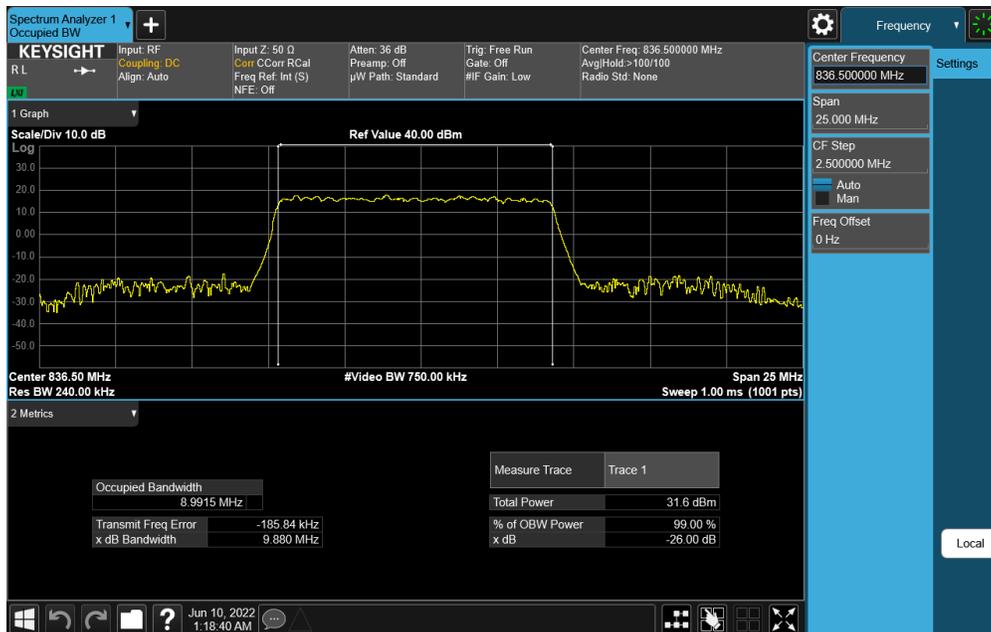


Plot 7-26. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz DFT-s-OFDM 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 27 of 108

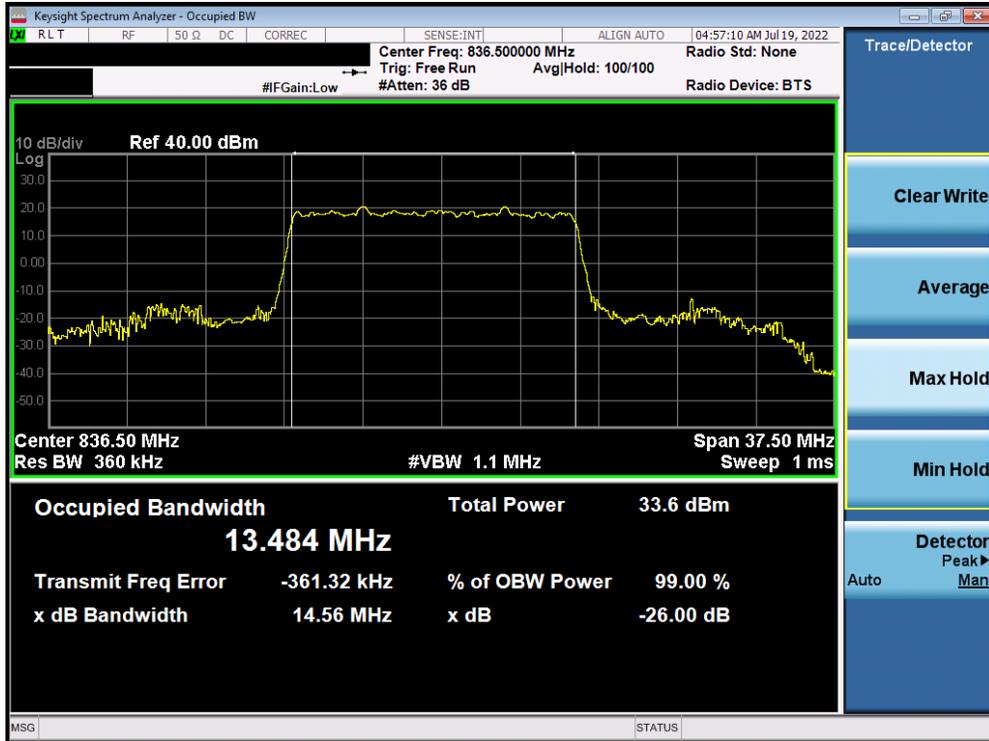

Plot 7-27. Occupied Bandwidth Plot (NR Band n5 - 15MHz DFT-s-OFDM  $\pi/2$  BPSK - Full RB Configuration)

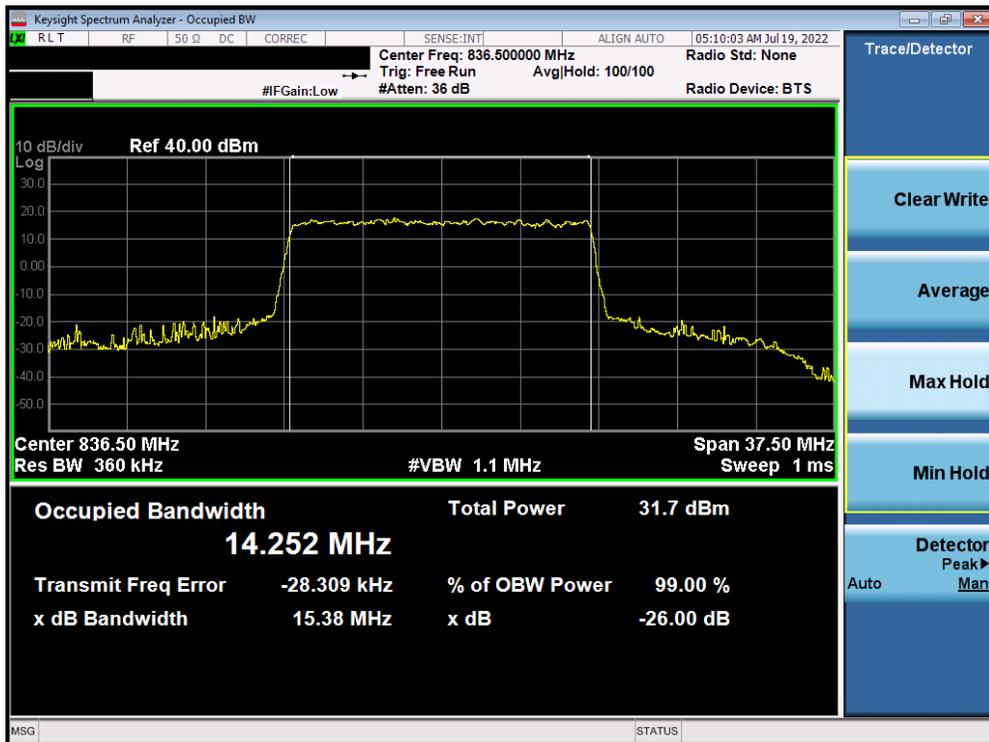


Plot 7-28. Occupied Bandwidth Plot (NR Band n5 - 15MHz CP-OFDM QPSK - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 28 of 108




Plot 7-29. Occupied Bandwidth Plot (NR Band n5 - 15MHz CP-OFDM 16-QAM - Full RB Configuration)

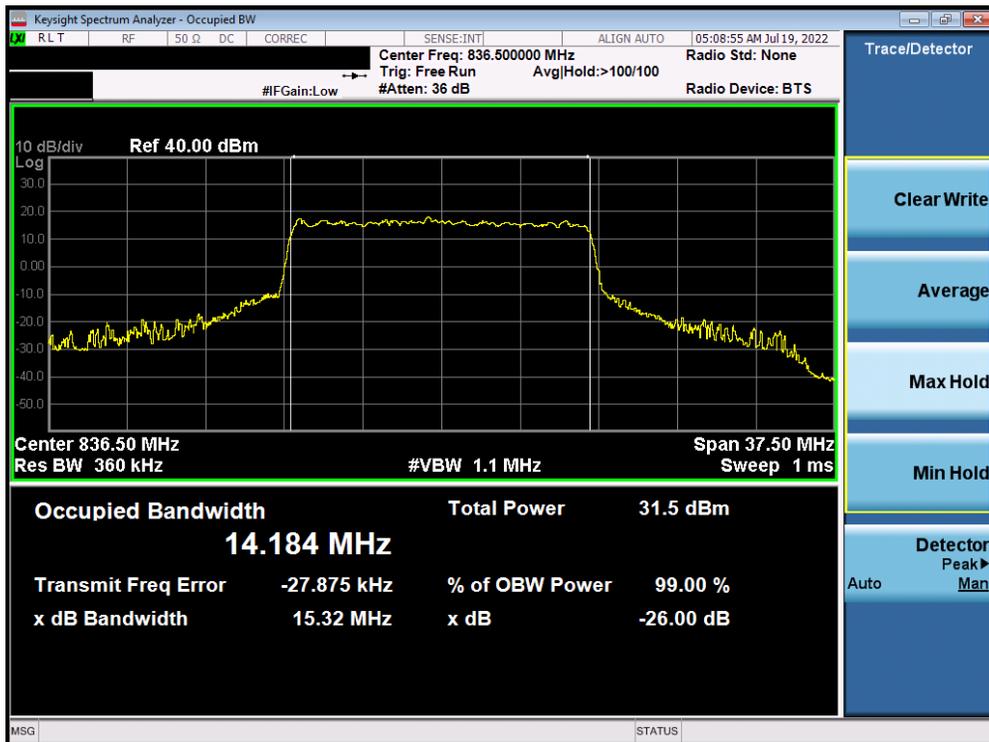


Plot 7-30. Occupied Bandwidth Plot (NR Band n5 - 15MHz CP-OFDM 64-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 29 of 108



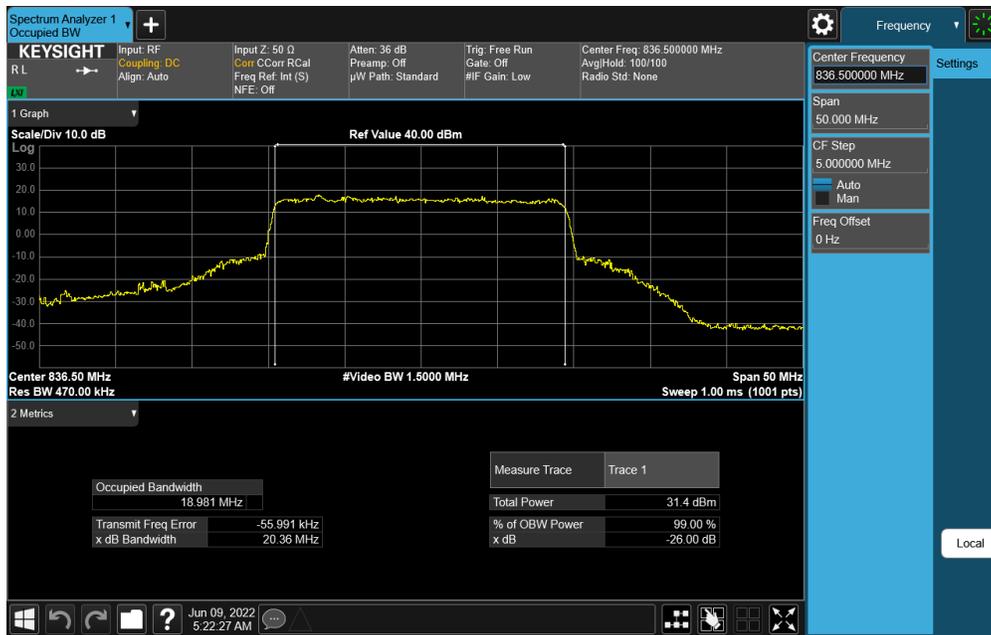

Plot 7-33. Occupied Bandwidth Plot (NR Band n5 - 20MHz CP-OFDM QPSK - Full RB Configuration)

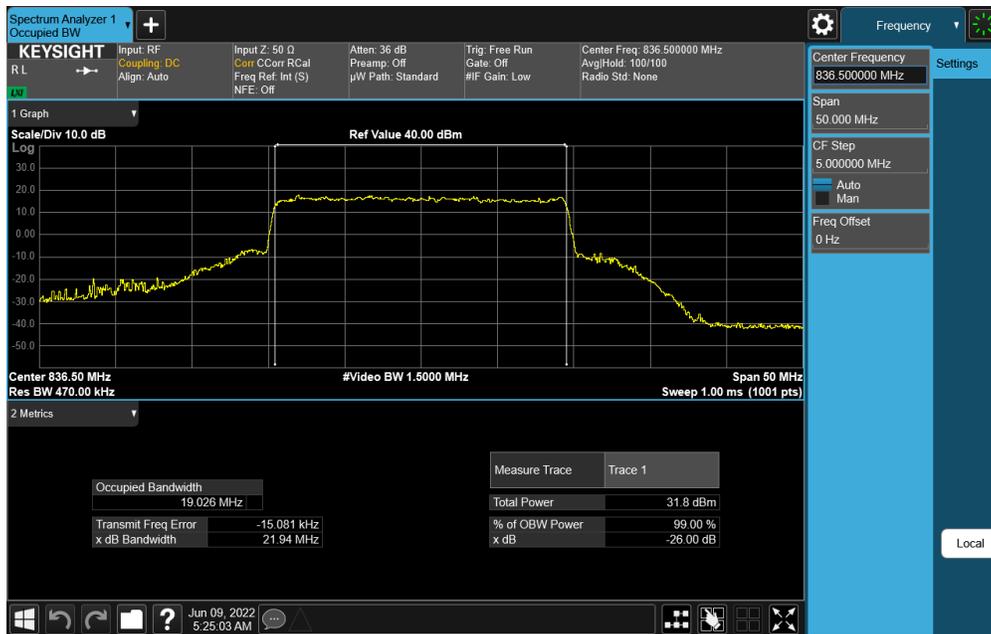

Plot 7-34. Occupied Bandwidth Plot (NR Band n5 - 20MHz CP-OFDM 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 31 of 108




Plot 7-35. Occupied Bandwidth Plot (NR Band n5 - 20MHz CP-OFDM 64-QAM - Full RB Configuration)



Plot 7-36. Occupied Bandwidth Plot (NR Band n5 - 20MHz CP-OFDM 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 32 of 108

# ULCA – LTE Band 5

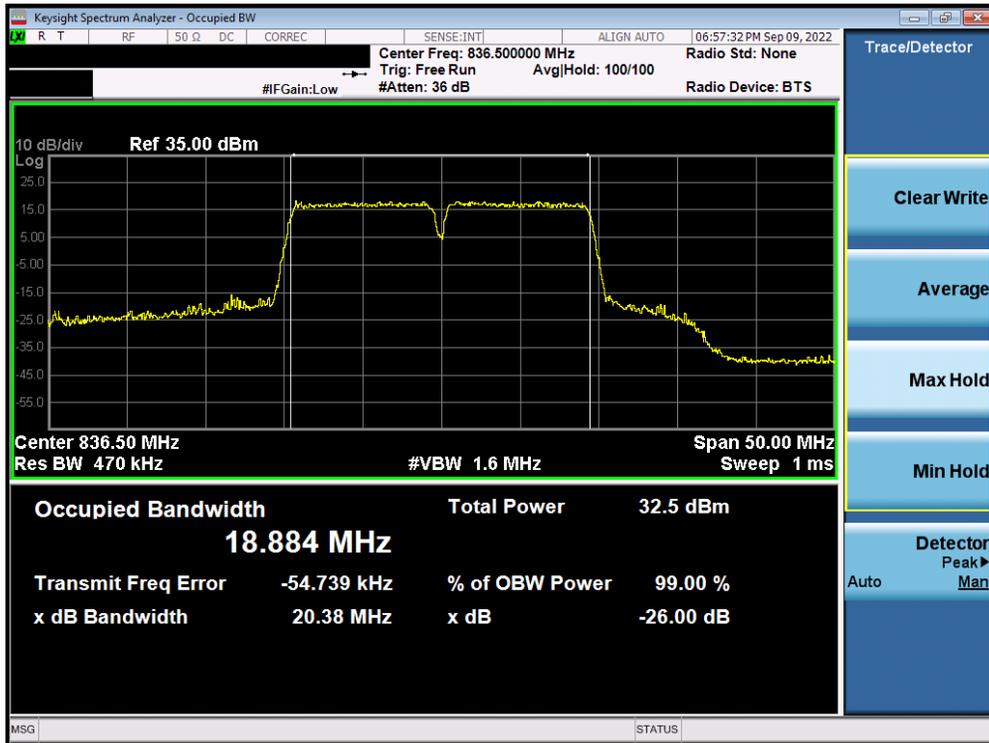

Plot 7-37. Occupied Bandwidth Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK - Full RB Configuration)




Plot 7-38. Occupied Bandwidth Plot (ULCA LTE Band 5 – (10 + 10)MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 33 of 108



Plot 7-39. Occupied Bandwidth Plot (ULCA LTE Band – (10 + 10)MHz 64-QAM - Full RB Configuration)

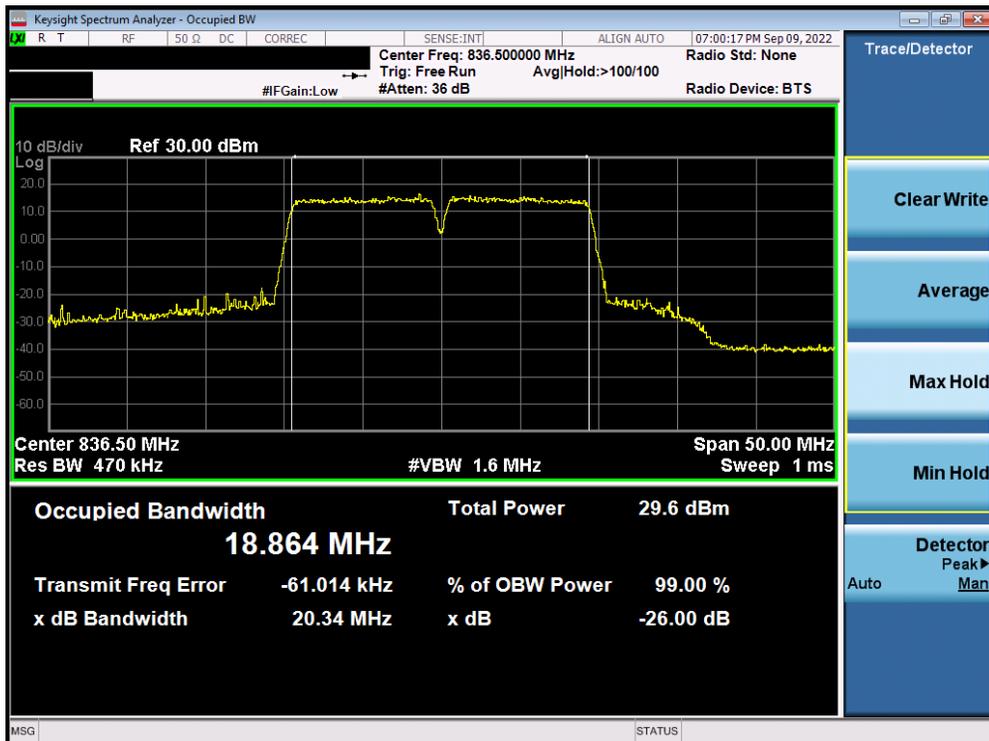

Plot 7-40. Occupied Bandwidth Plot (ULCA LTE Band – (10 + 10)MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 34 of 108

# WCDMA Cell



Plot 7-41. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

FCC ID: BCGA2435	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 35 of 108

### 7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051, 22.917(a)

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.**

#### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

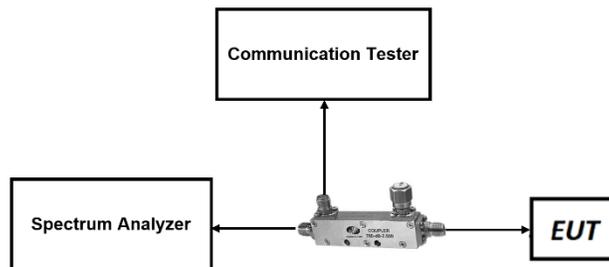


Figure 7-2. Test Instrument & Measurement Setup

FCC ID: BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 36 of 108

Version 2.1 11/9/2021


**Test Notes**

1. Per Part 22, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
3. Uplink carrier aggregation conducted spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) powers were found while operating with QPSK modulation with both carriers set to transmit using 1RB.
4. Uplink carrier aggregation inter-band emission was investigated and found to not be the worst case


<b>FCC ID:</b> BCGA2435	 <b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 37 of 108

Version2.1 11/9/2021



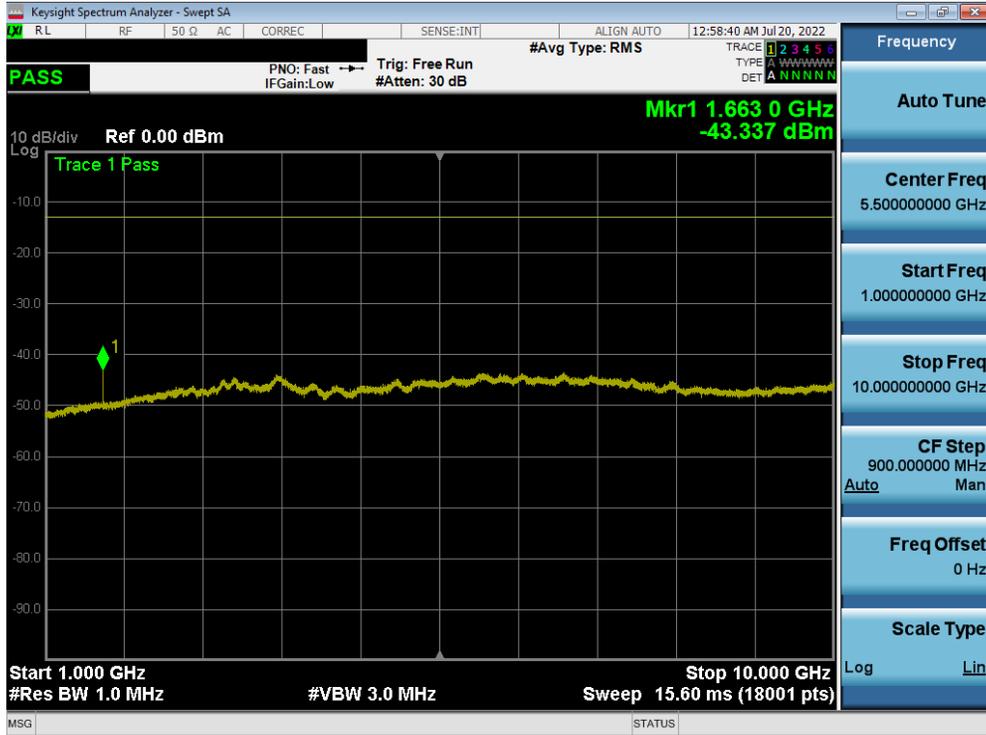


Plot 7-44. CSE (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

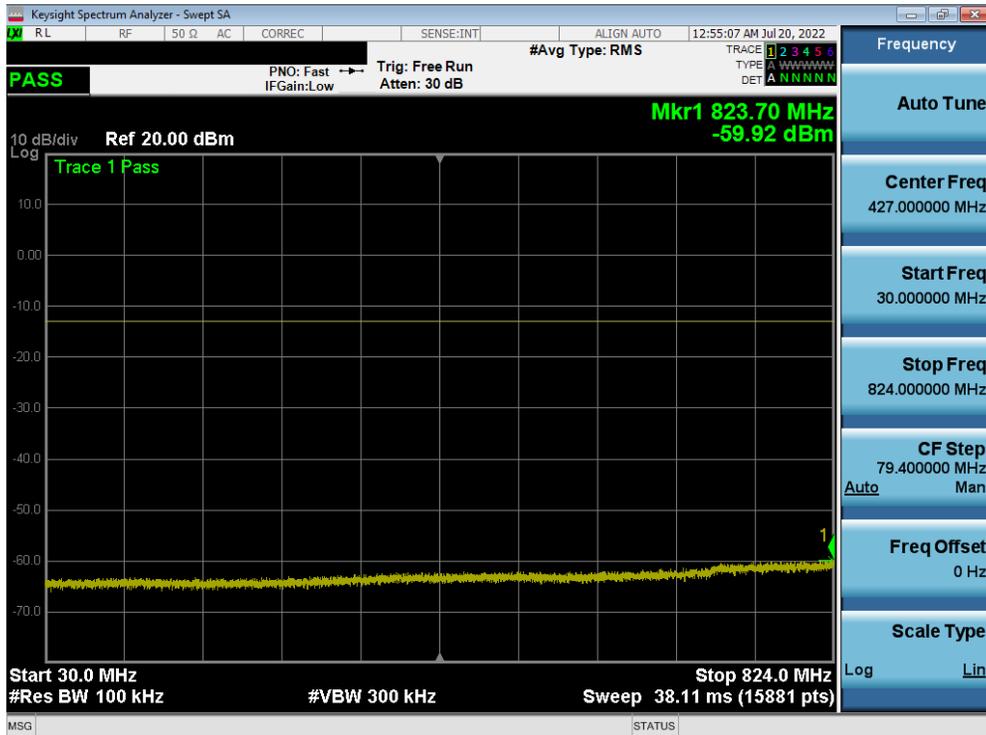


Plot 7-45. CSE (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 39 of 108

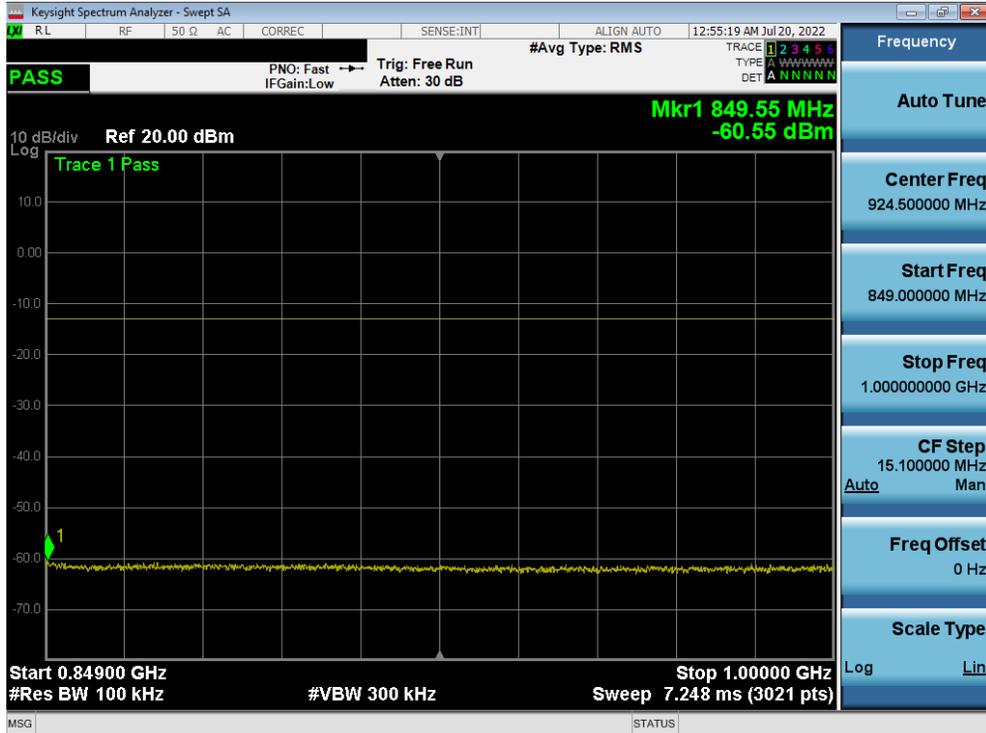

Plot 7-46. CSE (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

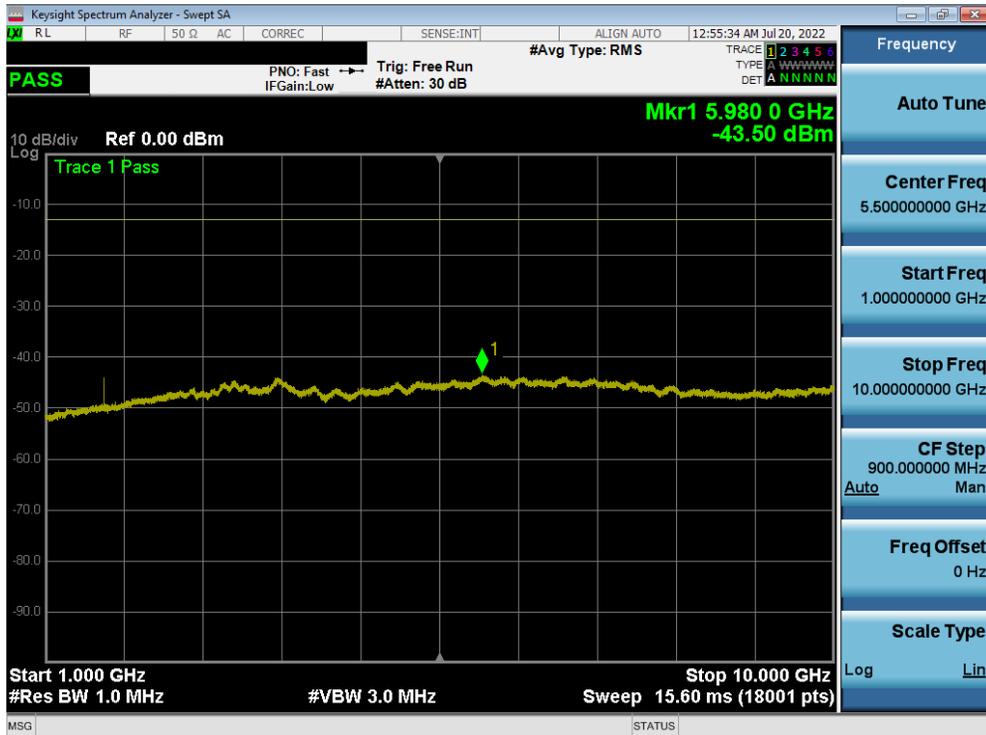


Plot 7-47. CSE (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 40 of 108




Plot 7-48. CSE (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

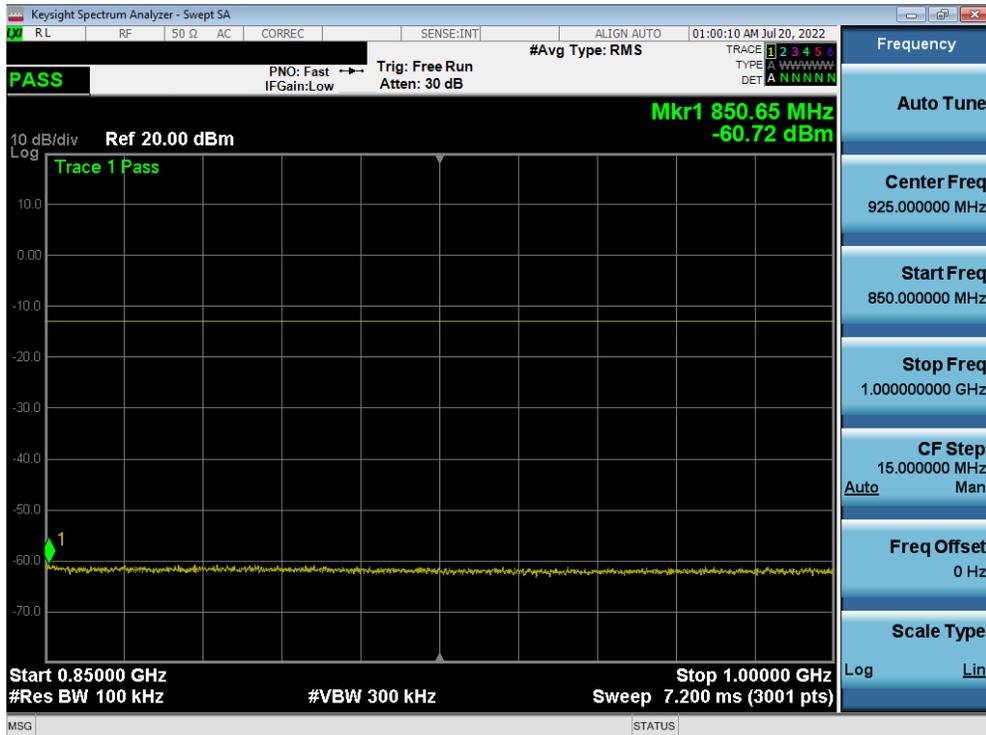

Plot 7-49. CSE (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 41 of 108

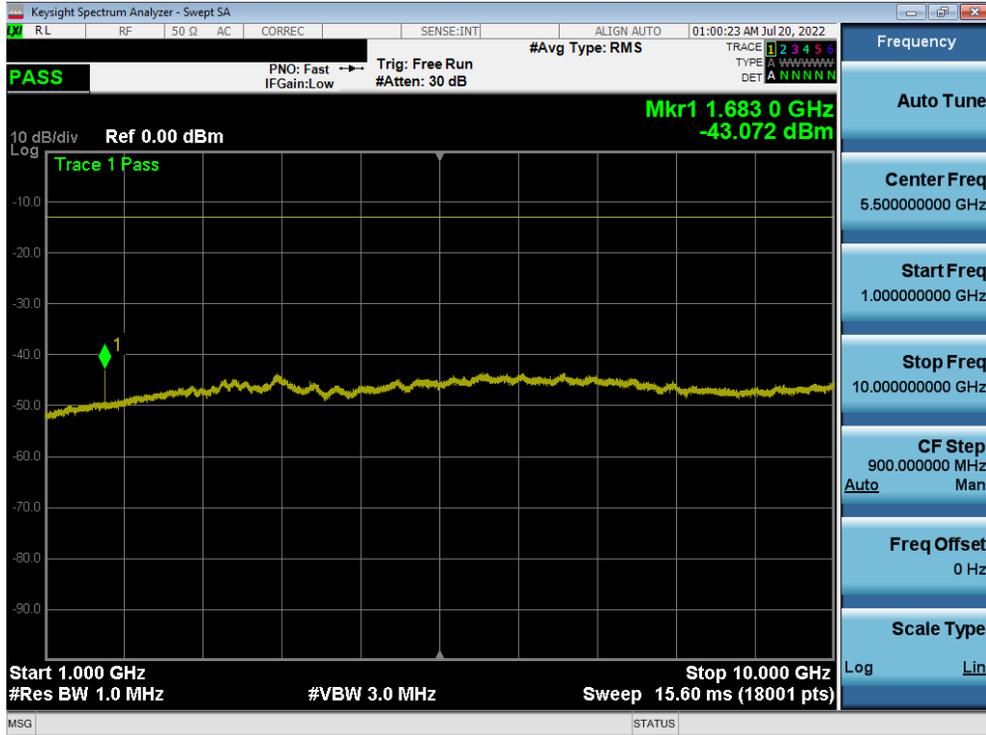


Plot 7-50. CSE (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 42 of 108



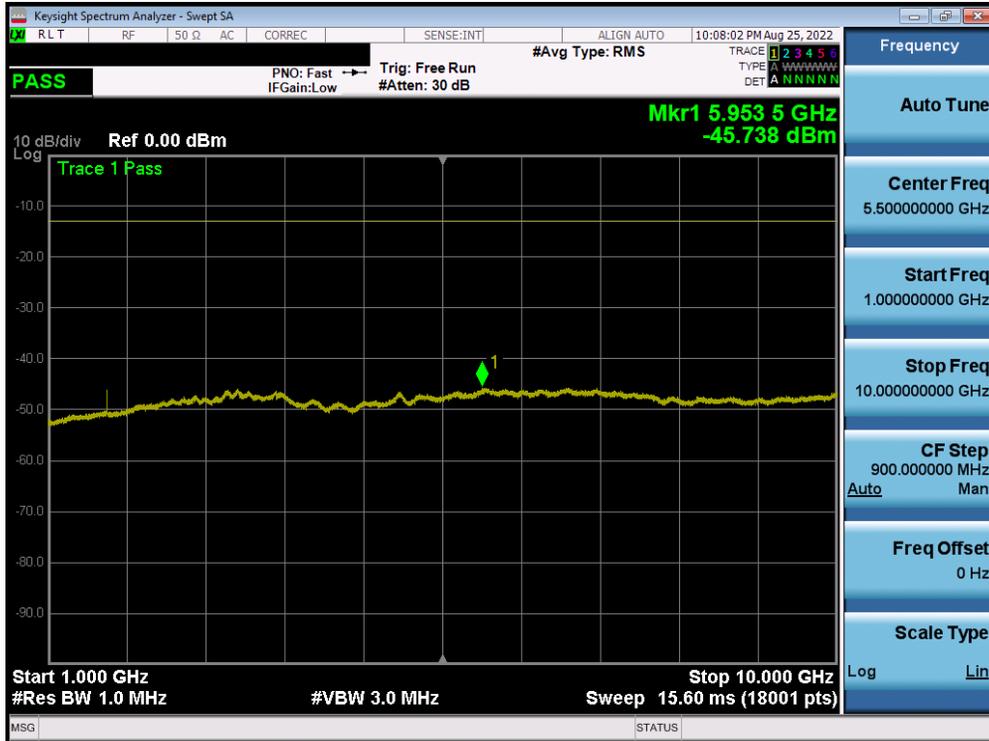


Plot 7-53. CSE (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/49 SCC 1/0 - Low Channel)

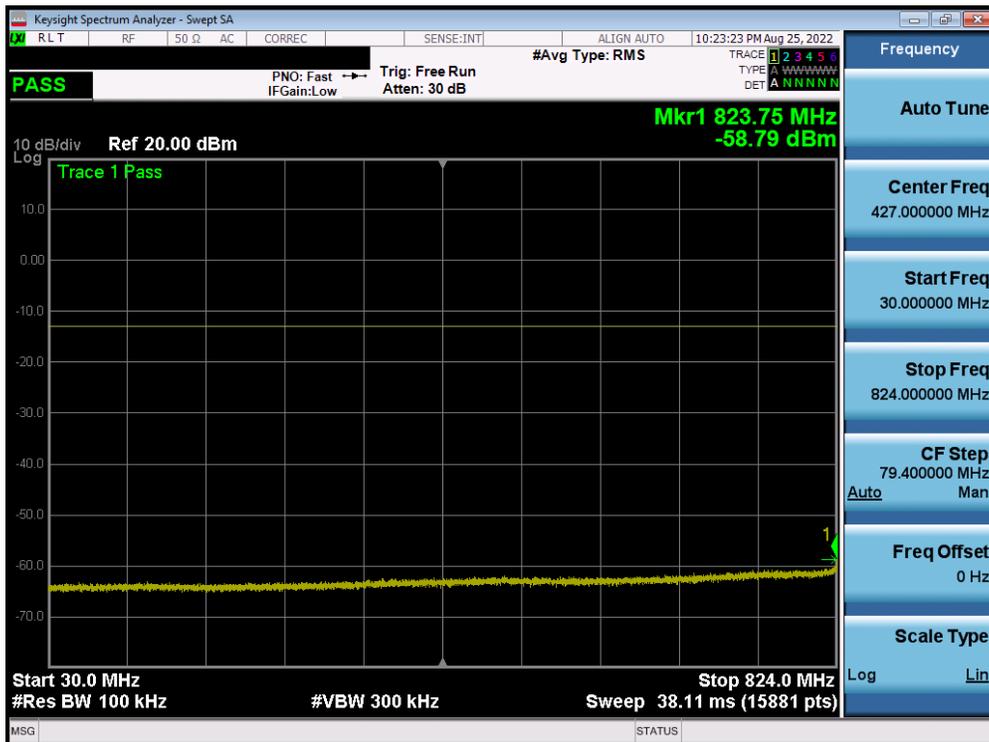


Plot 7-54. CSE (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/0 SCC 1/49 - High Channel)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 44 of 108

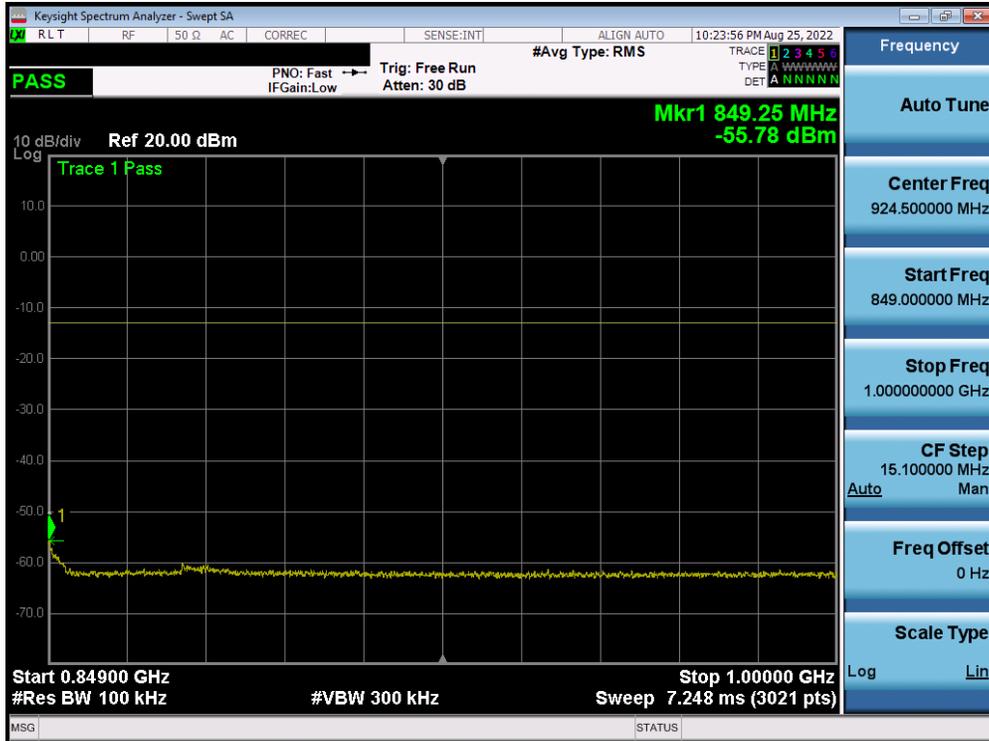


Plot 7-55. CSE (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/0 SCC 1/49 - High Channel)

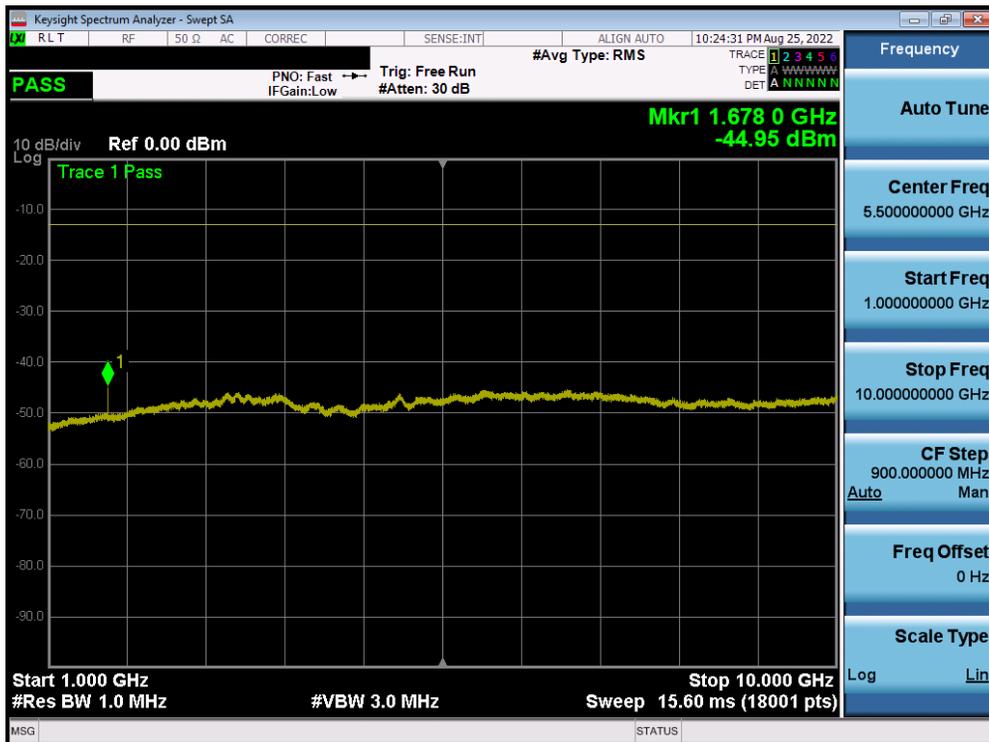


Plot 7-56. CSE (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/0 SCC 1/49 - High Channel)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 45 of 108

# NR Band n5

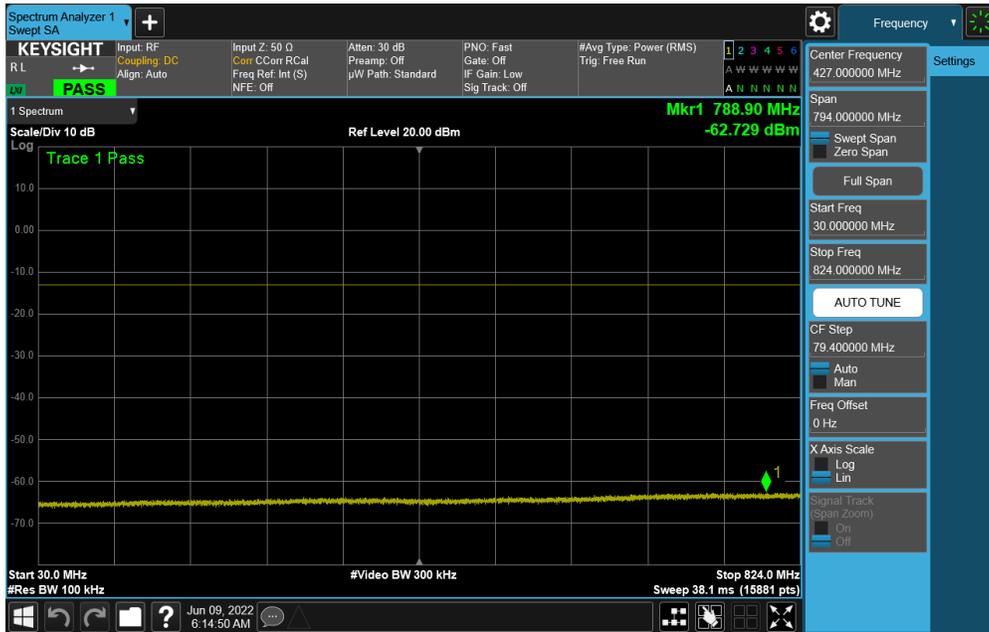


Plot 7-57. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

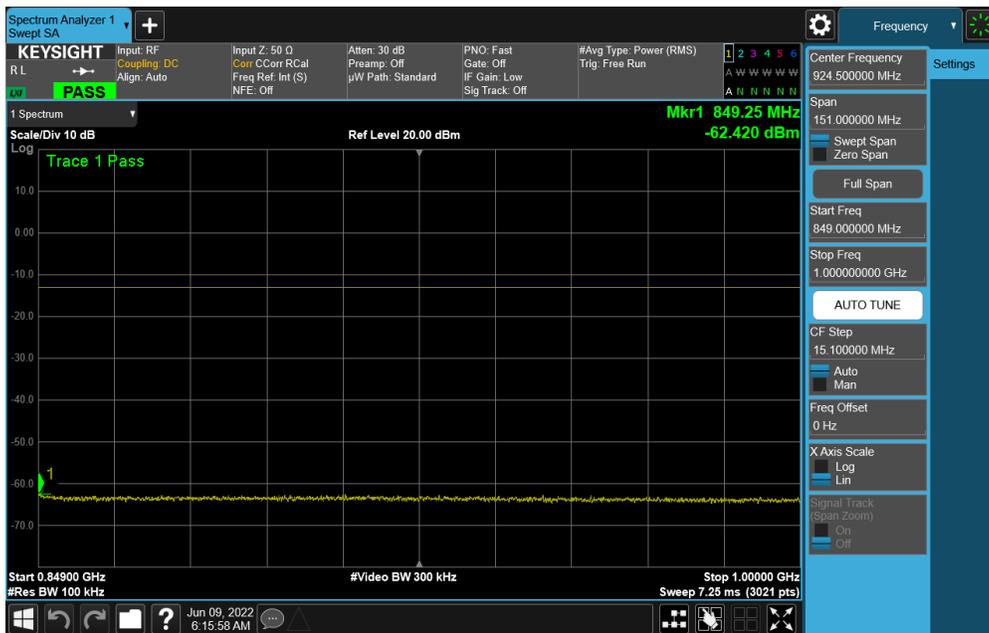


Plot 7-58. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2435	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 46 of 108

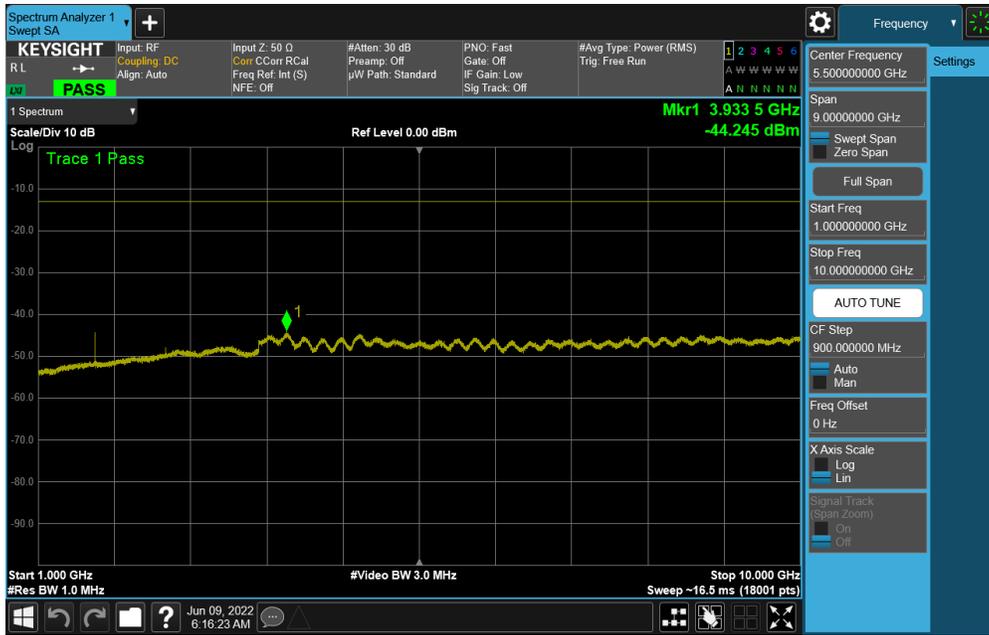


Plot 7-59. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

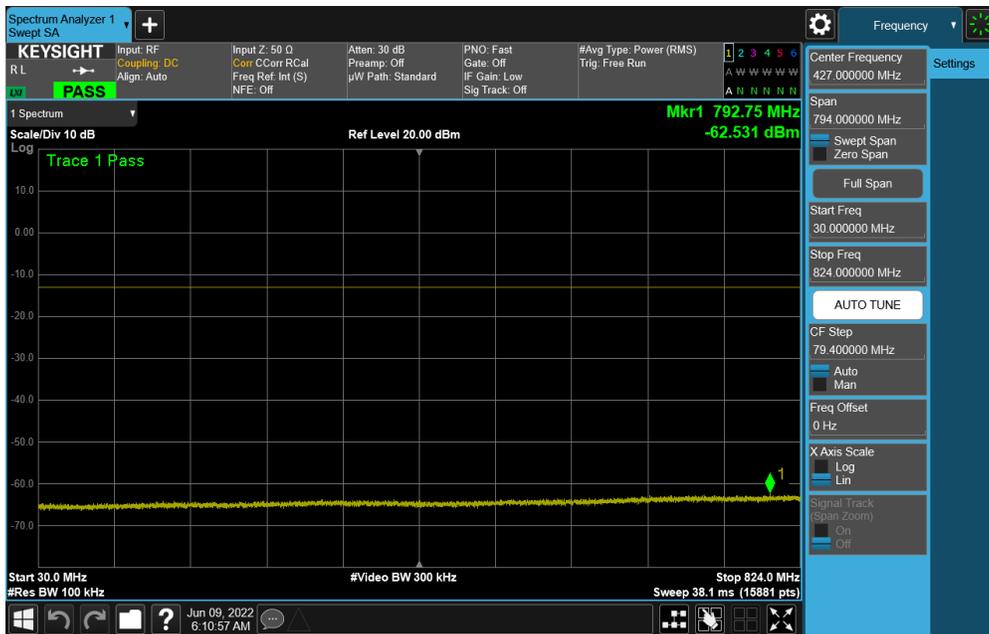


Plot 7-60. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 47 of 108

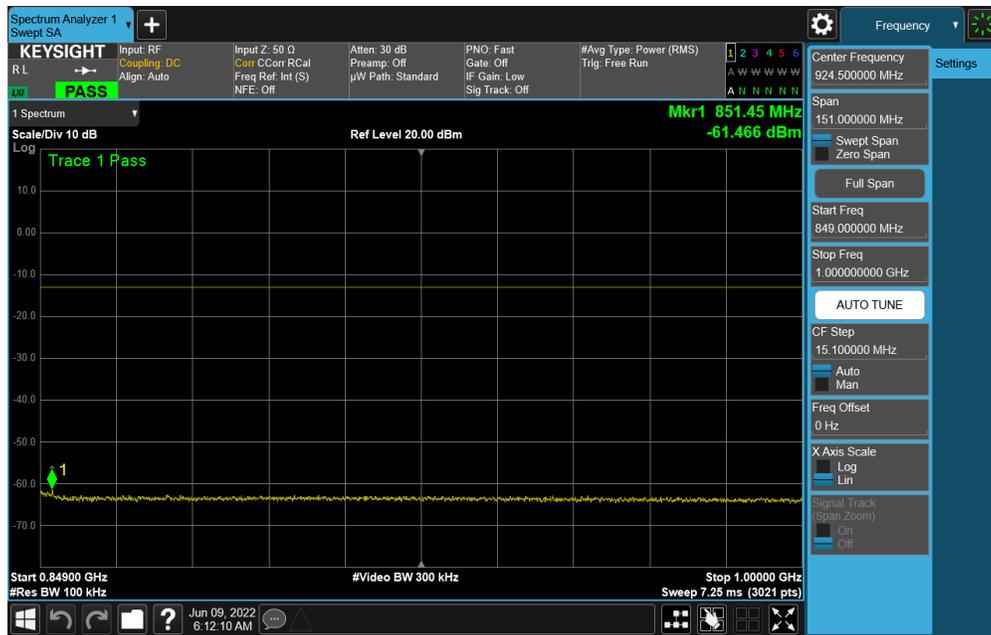


Plot 7-61. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

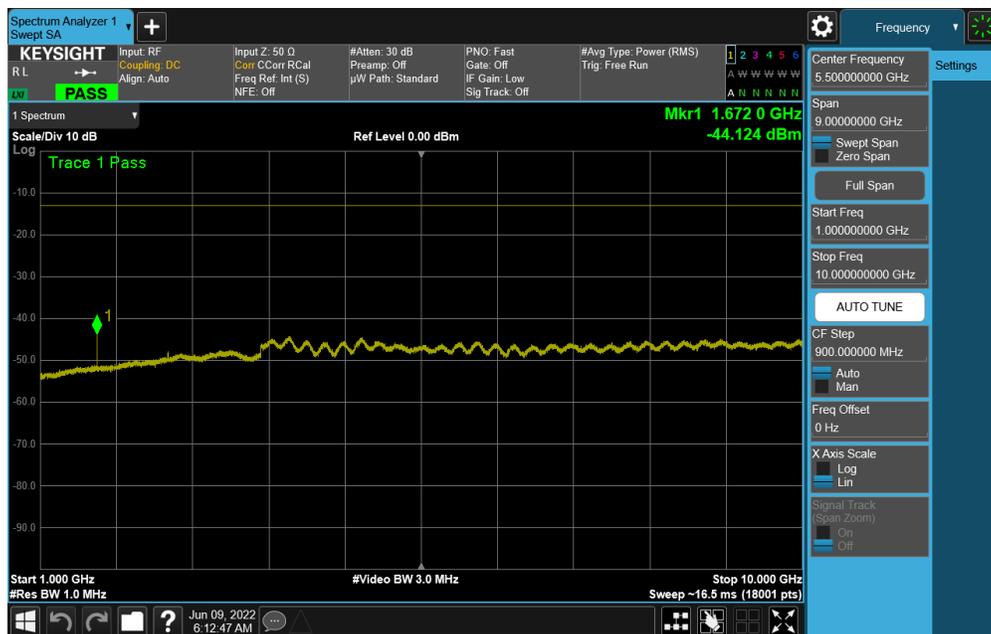


Plot 7-62. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 48 of 108

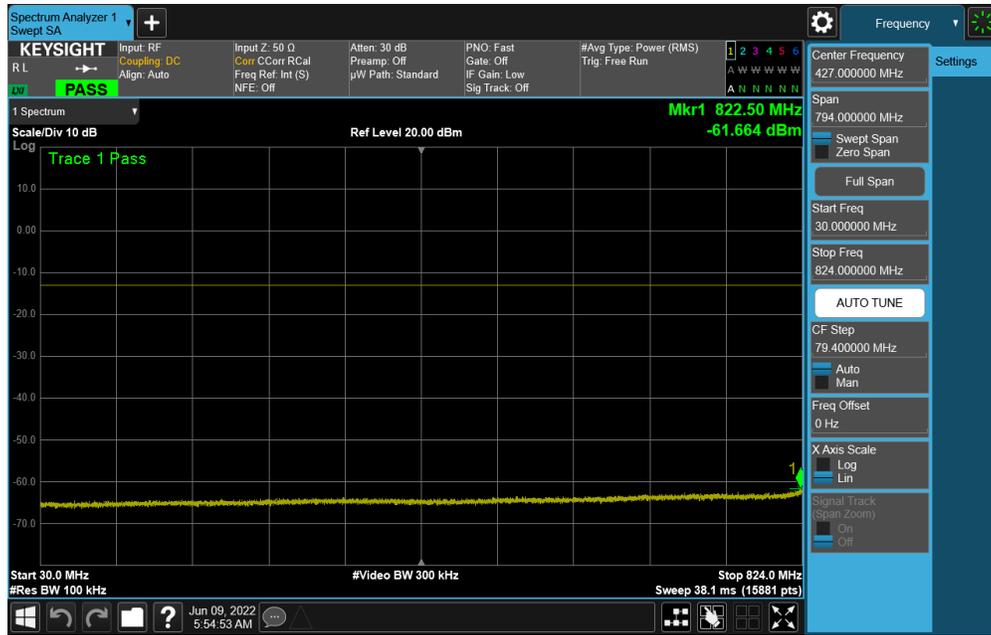


Plot 7-63. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

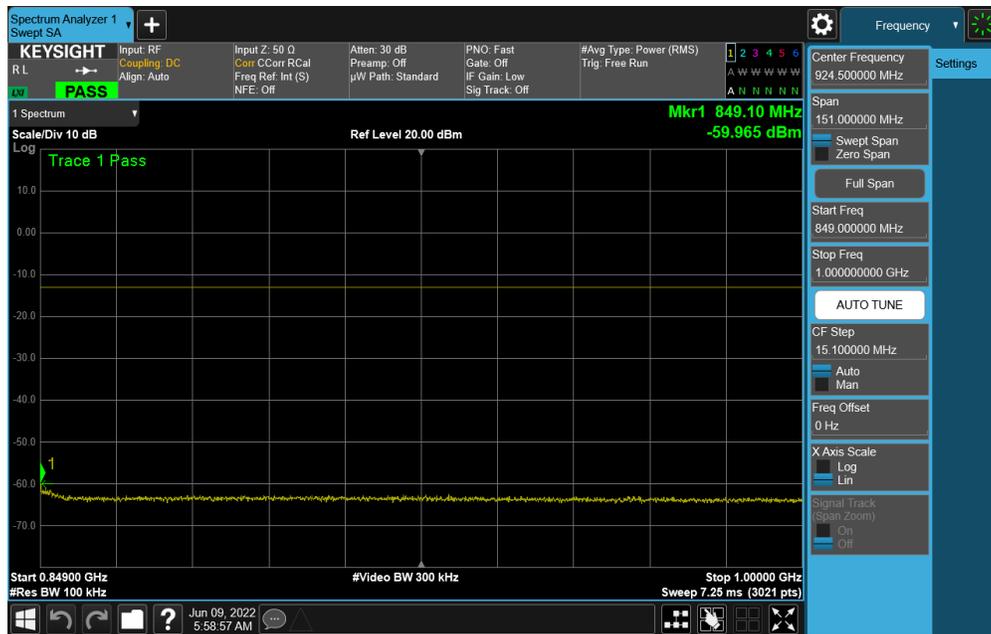

Plot 7-64. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCGA2435	<b>PART 22 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 49 of 108

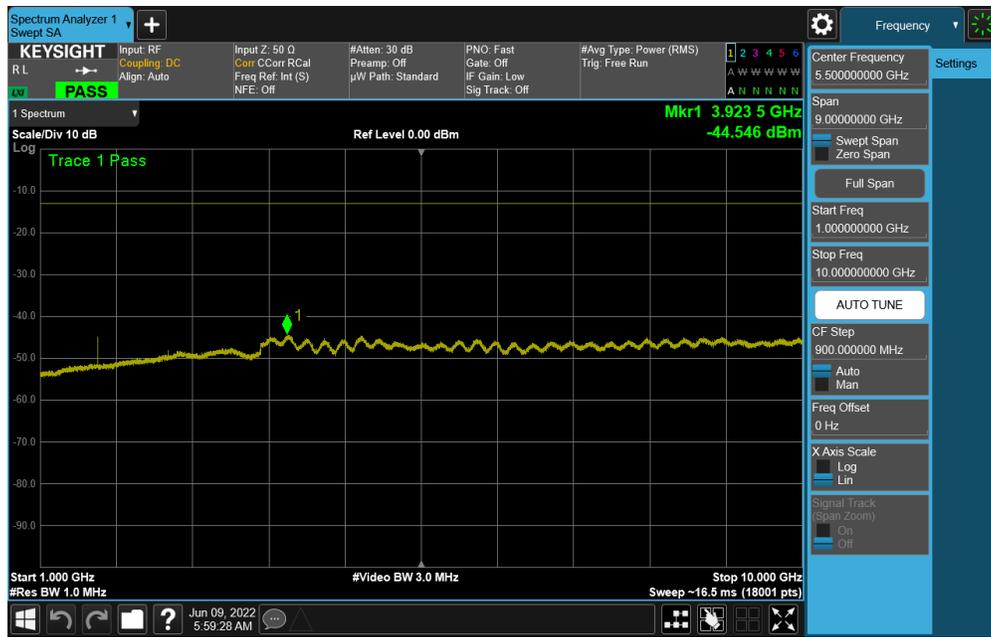


Plot 7-65. CSE (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2435	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-01.BCG	<b>Test Dates:</b> 05/30/2022 - 08/29/2022	<b>EUT Type:</b> Tablet Device	Page 50 of 108

### NR Band n26

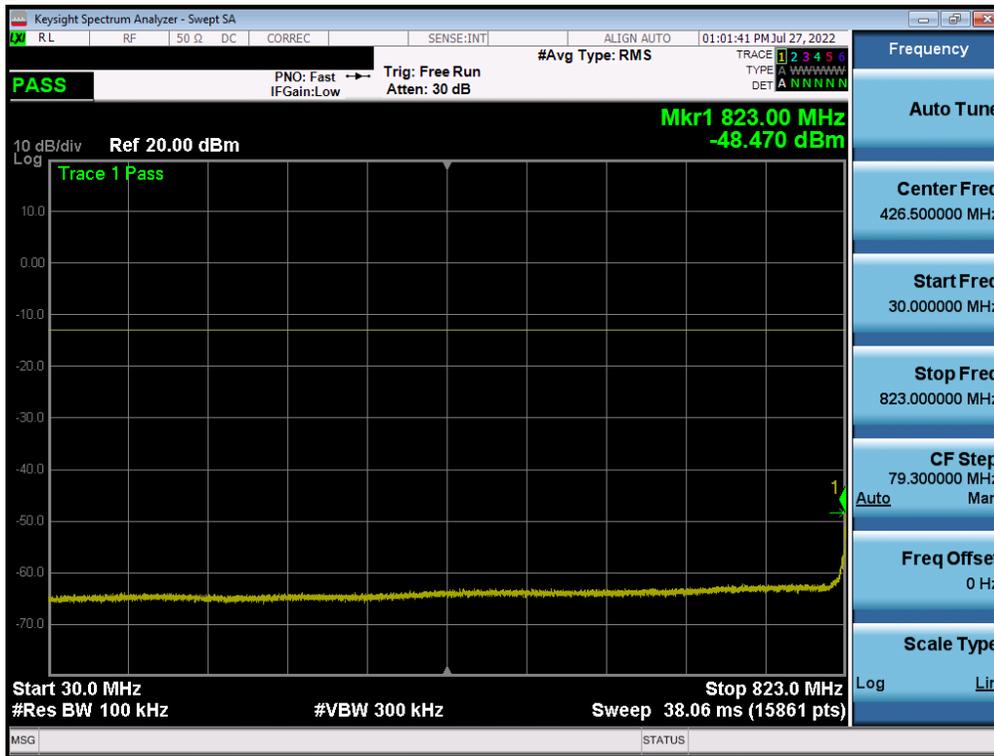

Plot 7-66. CSE (NR Band n26 - 10.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

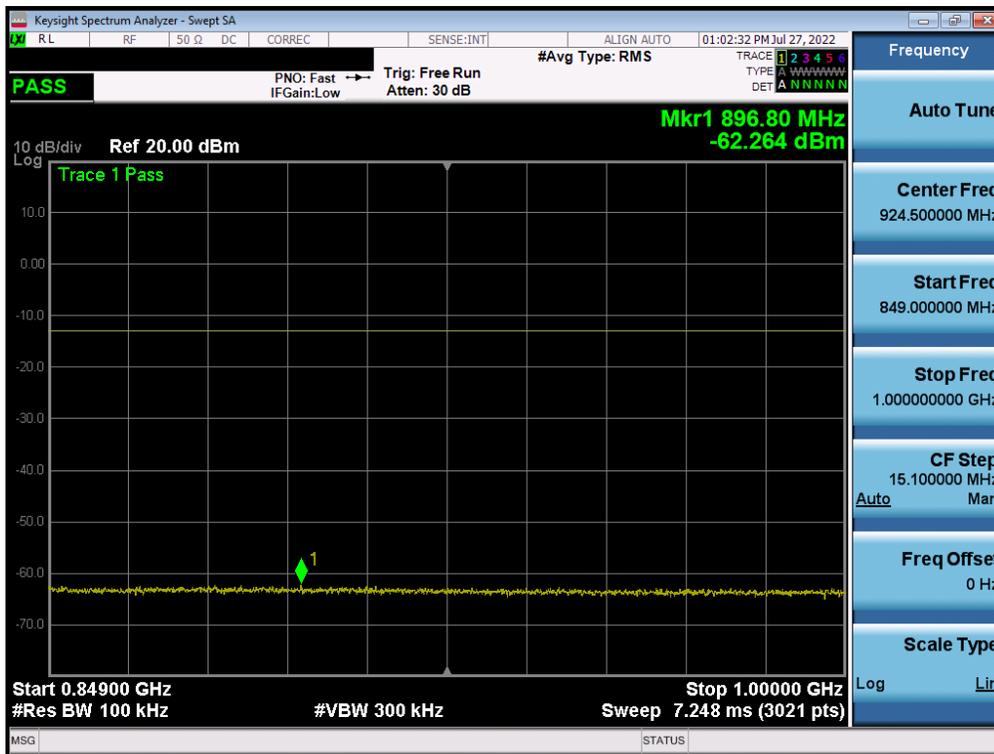

Plot 7-67. CSE (NR Band n26 - 10.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2435	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-01.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device
		Page 51 of 108