



DATA REFERENCE REPORT
PART 90

Applicant Name:

Apple Inc.
 One Apple Park Way
 Cupertino, CA 95014
 United States

Date of Testing:

05/30/2022 - 09/09/2022

Test Site/Location:

Element Washington DC LLC. Morgan Hill, CA, USA

Test Report Serial No.:

1C2205090026-08.BCG

FCC ID:	BCGA2761
APPLICANT:	Apple Inc.

Reference Model:

A2435

Variant Model::

A2761(A2762)

EUT Type:

Tablet Device

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part:

90

Test Procedure(s):

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
 Executive Vice President



FCC ID: BCGA2761	PART 90 DATA REFERENCE REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090026-08.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device	Page 1 of 7

V2.1 11/9/2021

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Washington DC LLC Test Location	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities.....	4
2.3	Antenna Description	5
3.0	CONCLUSION.....	6
4.0	APPENDIX A: REFERENCE MODEL TEST REPORT.....	7

FCC ID: BCGA2761	 PART 90 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-08.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
		Page 2 of 7

V2.1 11/9/2021

1.0 INTRODUCTION

1.1 Scope

Per manufacturer declaration, there are two tablet device models, A2435 and A2761(A2762), with high degree of similarity, reference model FCC ID: BCGA2435 and variant model **FCC ID: BCGA2761**. The reference model support mmWave operations, while the variant models have the mmWave components/antennas removed. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCGA2435, while conducted and radiated spot-check verification has been performed on variant model **FCC ID: BCGA2761**. Spot-check measurements were conducted, all measurements were investigated and found to be within acceptable tolerance.

Equipment Class	Reference Model FCC ID	Reference Report	Report Title
PCB	BCGA2435	1C2205090025-09.BCG	RF Part 90 Test Report

Table 1-1. Reference Model Details

Spot-check verification are not applicable to this test report; therefore, all data for variant model **FCC ID: BCGA2761** can be fully referenced from the reference model.

Reference model FCC ID: BCGA2435 test report has been included in Appendix A

1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2761	 PART 90 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-08.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
		Page 3 of 7

V2.1 11/9/2021

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2761**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90.

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT, NB UNII (1x, HDR4, HDR8)

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WiFi 2.4GHz	Bluetooth	NB UNII	WiFi 5GHz	WiFi 6GHz	LTE / FR1 NR
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	BDR, HDR4/8	802.11 a/n/ac/ax	802.11 a/ax	Ultra High Band
2a	Config 1	✓	✗	✗	✗	✗	✓
2a	Config 2	✗	✓	✗	✗	✗	✓
4a	Config 3	✓	✗	✓	✗	✗	✗
4a	Config 4	✗	✓	✗	✓	✗	✗

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 2 and reported in RF Bluetooth and RF Part 96 test reports.

Wi-Fi 2.4GHz and Bluetooth 2.4 GHz can transmit simultaneously on separate antennas. For BT (2.4 GHz) in connected mode and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4 GHz) in disconnected mode and Wi-Fi (2.4 GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power.

FCC ID: BCGA2761	 PART 90 DATA REFERENCE REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090026-08.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device	Page 4 of 7

V2.1 11/9/2021

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain [dBi]	
	Antenna 3	Antenna 1
LTE Band 14	-2.7	-1.5
NR Band n14		
LTE Band 26	-1.3	-2.6
NR Band n26		

Table 2-2. Highest Antenna Gain

FCC ID: BCGA2761	 PART 90 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-08.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
		Page 5 of 7

3.0 CONCLUSION

The spot-check data measured for variant model **FCC ID: BCGA2761** is in tolerance with reference model FCC ID: BCGA2435 per FCC Approved Data Referencing Test Plan.

FCC ID: BCGA2761	 PART 90 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090026-08.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
		Page 6 of 7

V2.1 11/9/2021

4.0 APPENDIX A: REFERENCE MODEL TEST REPORT

Attached is the test report (1C2205090025-09.BCG) from reference model FCC ID: BCGA2435, which includes referenced data results.

FCC ID: BCGA2761	 PART 90 DATA REFERENCE REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090026-08.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device	Page 7 of 7

V2.1 11/9/2021



MEASUREMENT REPORT
FCC Part 90

Applicant Name:

Apple Inc.
 One Apple Park Way
 Cupertino, CA 95014
 United States

Date of Testing:

05/30/2022 - 09/09/2022

Test Site/Location:

Element Washington DC LLC Morgan Hill, CA, USA

Test Report Serial No.:

1C2205090025-09.BCG

FCC ID:

BCGA2435

APPLICANT:

Apple Inc.

Application Type:

Certification

Model:

A2435

EUT Type:

Tablet Device

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part:

§2.1049, §90(S), §90(R)

Test Procedure(s):

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
 Executive Vice President



CERT #2041.02


FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
© 2022 Element Washington DC LLC		Page 1 of 101

V2.1 11/9/2021

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Occupied Bandwidth	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal	37
7.4	Band Edge Emissions at Antenna Terminal	58
7.5	Conducted Power Output Data	74
7.6	Radiated Power (ERP).....	77
7.7	Radiated Spurious Emissions	81
7.8	Frequency Stability / Temperature Variation	96
8.0	CONCLUSION.....	101

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
© 2022 Element Washington DC LLC		V2.1 11/9/2021



MEASUREMENT REPORT

FCC Part 90



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Measurement	OBW [MHz]	Max. Power [W]	Max. Power [dBm]	Emission Designator	
LTE Band 26	1.4 MHz	QPSK	814.7 - 823.3	Conducted	1.1070	0.353	25.48	1M11G7W	
		16QAM	814.7 - 823.3	Conducted	1.1041	0.272	24.34	1M10D7W	
		64QAM	814.7 - 823.3	Conducted	1.1060	0.228	23.57	1M11D7W	
		256QAM	814.7 - 823.3	Conducted	1.1059	0.147	21.66	1M11D7W	
	3 MHz	QPSK	815.5 - 822.5	Conducted	2.7218	0.357	25.53	2M72G7W	
		16QAM	815.5 - 822.5	Conducted	2.7209	0.268	24.27	2M72D7W	
		64QAM	815.5 - 822.5	Conducted	2.7153	0.214	23.30	2M72D7W	
		256QAM	815.5 - 822.5	Conducted	2.7238	0.150	21.76	2M72D7W	
	5 MHz	QPSK	816.5 - 821.5	Conducted	4.5280	0.354	25.49	4M53G7W	
		16QAM	816.5 - 821.5	Conducted	4.5439	0.274	24.37	4M54D7W	
		64QAM	816.5 - 821.5	Conducted	4.5373	0.227	23.56	4M54D7W	
		256QAM	816.5 - 821.5	Conducted	4.5268	0.144	21.59	4M53D7W	
	10 MHz	QPSK	819.0	Conducted	9.0185	0.348	25.42	9M02G7W	
		16QAM	819.0	Conducted	9.0345	0.274	24.38	9M03D7W	
		64QAM	819.0	Conducted	9.0163	0.224	23.51	9M02D7W	
		256QAM	819.0	Conducted	9.0554	0.146	21.63	9M06D7W	
LTE Band 14	5 MHz	QPSK	790.5 - 795.5	ERP	4.5267	0.117	20.69	4M53G7W	
		16QAM	790.5 - 795.5	ERP	4.5338	0.099	19.94	4M53D7W	
		64QAM	790.5 - 795.5	ERP	4.5232	0.079	18.96	4M52D7W	
		256QAM	790.5 - 795.5	ERP	4.5340	0.046	16.65	4M53D7W	
	10 MHz	QPSK	793.0	ERP	9.0223	0.120	20.79	9M02G7W	
		16QAM	793.0	ERP	9.0186	0.093	19.70	9M02D7W	
		64QAM	793.0	ERP	9.0136	0.076	18.78	9M01D7W	
		256QAM	793.0	ERP	9.0459	0.048	16.77	9M05D7W	
NR Band n14	5 MHz	$\pi/2$ BPSK	790.5 - 795.5	ERP	4.5896	0.115	20.59	4M59G7W	
		QPSK	790.5 - 795.5	ERP	4.5317	0.114	20.58	4M53G7W	
		16QAM	790.5 - 795.5	ERP	4.5146	0.092	19.63	4M51D7W	
		64QAM	790.5 - 795.5	ERP	4.5128	0.073	18.61	4M51D7W	
		256QAM	790.5 - 795.5	ERP	4.5323	0.043	16.31	4M53D7W	
	10 MHz	$\pi/2$ BPSK	793.0	ERP	9.0280	0.110	20.41	9M03G7W	
		QPSK	793.0	ERP	9.3426	0.113	20.53	9M34G7W	
		16QAM	793.0	ERP	9.3856	0.090	19.56	9M39D7W	
		64QAM	793.0	ERP	9.3964	0.063	17.97	9M40D7W	
		256QAM	793.0	ERP	9.3866	0.038	15.85	9M39D7W	
	NR Band n26	5 MHz	$\pi/2$ BPSK	816.5 - 821.5	Conducted	4.5851	0.337	25.27	4M59G7W
			QPSK	816.5 - 821.5	Conducted	4.5289	0.339	25.30	4M53G7W
16QAM			816.5 - 821.5	Conducted	4.5084	0.295	24.70	4M51D7W	
64QAM			816.5 - 821.5	Conducted	4.5068	0.201	23.03	4M51D7W	
256QAM			816.5 - 821.5	Conducted	4.5239	0.123	20.91	4M52D7W	
10 MHz		$\pi/2$ BPSK	819.0	Conducted	9.0365	0.342	25.35	9M04G7W	
		QPSK	819.0	Conducted	9.3217	0.339	25.30	9M32G7W	
		16QAM	819.0	Conducted	9.3632	0.291	24.64	9M36D7W	
		64QAM	819.0	Conducted	9.3673	0.195	22.91	9M37D7W	
		256QAM	819.0	Conducted	9.3904	0.127	21.03	9M39D7W	

EUT Overview

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
© 2022 Element Washington DC LLC		Page 3 of 101

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device	Page 4 of 101

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2435**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90.

Test Device Serial No.: M7QHWW6VGQ, X4MFMQKGM4, V68MLB20069

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1/FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT, NB UNII (1x, HDR4, HDR8)

This device supports BT Beamforming.

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WiFi 2.4GHz	Bluetooth	NB UNII	WiFi 5GHz	WiFi 6GHz	LTE / FR1 NR
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	BDR, HDR4/8	802.11 a/n/ac/ax	802.11 a/ax	Ultra High Band
2a	Config 1	✓	✗	✗	✗	✗	✓
2a	Config 2	✗	✓	✗	✗	✗	✓
4a	Config 3	✓	✗	✓	✗	✗	✗
4a	Config 4	✗	✓	✗	✓	✗	✗

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be config 2 and reported in Bluetooth and FCC part 96 test reports.

Wi-Fi 2.4GHz and Bluetooth 2.4 GHz can transmit simultaneously on separate antennas. For BT (2.4 GHz) in connected mode and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4 GHz) in disconnected mode and Wi-Fi (2.4 GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power.

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device	Page 5 of 101

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain (dBi)	
	Antenna 3	Antenna 1
LTE Band 14	-2.7	-1.5
NR Band n14		
LTE Band 26	-1.3	-2.6
NR Band n26		

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model: A2141	S/N:	C02DV7VKMD6T
	w/AC/DC Adapter	Model: A2166	S/N:	N/A
2	Apple USB-C Cable	Model: Spartan	S/N:	000MKTR02U
3	USB-C Cable	Model: A246	S/N:	N/A
	w/ AC Adapter	Model: A2305	S/N:	N/A
4	Apple Pencil	Model: N/A	S/N:	GQXGSXBJKM9
5	DC Power Supply	Model: KPS3010D	S/N:	N/A

Table 2-3. Test Support Equipment

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
© 2022 Element Washington DC LLC		V2.1 11/9/2021

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 20A8359 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
© 2022 Element Washington DC LLC		V2.1 11/9/2021

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015 and TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
<small>© 2022 Element Washington DC LLC</small>		<small>V2.1 11/9/2021</small>

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
Agilent Technologies	N9020A	MXA Signal Analyzer	4/26/2022	Annual	4/26/2023	MY56470202
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	1/19/2022	Annual	1/19/2023	T058701-02
ETS-Lindgren	3142E	Biconilog Antenna (26-6000MHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18GHz)	10/25/2021	Annual	10/25/2022	227597
ETS-Lindgren	SU-241	Table Top Temperature Chamber	10/6/2021	Annual	10/6/2022	92009574
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz-6GHz)	1/6/2022	Annual	1/6/2023	102328
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	FSVA3044	Signal Analyzer (up to 44 GHz)	5/12/2022	Annual	5/12/2023	101098
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546
Rohde & Schwarz	TC-TA18	Cross-Polarized Antenna 400MHz-18GHz	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz-18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz-40GHz)	4/18/2022	Annual	4/18/2023	100050

Table 5-1. Summary of Test Results

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device	Page 10 of 101

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7W

- LTE BW = 8.62 MHz
- G = Phase Modulation
- 7 = Quantized/Digital Info
- W = Combination of Any

16QAM Modulation

Emission Designator = 8M45D7W

- LTE BW = 8.45 MHz
- D = Amplitude/Angle Modulated
- 7 = Quantized/Digital Info
- W = Combination of Any

Spurious Radiated Emission

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
© 2022 Element Washington DC LLC		V2.1 11/9/2021

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2435
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE/NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions (LTE Band 14)	2.1051, 90.543(e)	On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than 65 + 10 log(P) dB in a 6.25 kHz band segment, for mobile and portable stations. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least 43 + 10 log(P) dB	PASS	Sections 7.3, 7.4
	Conducted Band Edge / Spurious Emissions (NR Band n14)				
	Conducted Band Edge / Spurious Emissions (LTE Band 26)	2.1051, 90.691(a)	-13 dBm for all out-of-band emissions except -30 dBm at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Sections 7.3, 7.4
	Conducted Band Edge / Spurious Emissions (NR Band 26)				
	Frequency Stability (LTE Band 14)	2.1055	Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	PASS	Section 7.8
	Frequency Stability (NR Band n14)				
	Frequency Stability (LTE Band 26)	90.213	< 2.5 ppm	PASS	Section 7.8
	Frequency Stability (NR Band n26)				
	Conducted Power	2.1046, 90.635	< 100 Watts	PASS	Section 7.5
	Effective Radiated Power (LTE Band 14)	90.542(a)(7)	< 3 Watts max. ERP	PASS	Section 7.6
Effective Radiated Power (NR Band n14)	PASS			Section 7.6	
RADIATED	Radiated Spurious Emissions (LTE Band 14)	2.1053, 90.543(e)	-13 dBm for all out-of-band emissions except emissions in the 1559 - 1610MHz band are subject to a limit of -40dBm/MHz for wideband signals	PASS	Section 7.7
	Radiated Spurious Emissions (NR Band n14)			PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 26)	2.1053, 90.691(a)	-13 dBm for all out-of-band emissions except -30 dBm at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Section 7.7
	Radiated Spurious Emissions (NR Band n26)			PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
		Page 12 of 101

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.1.
5. All ports were investigated and for some test cases only the worst case data was reported.

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device	Page 13 of 101

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation and all ports were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

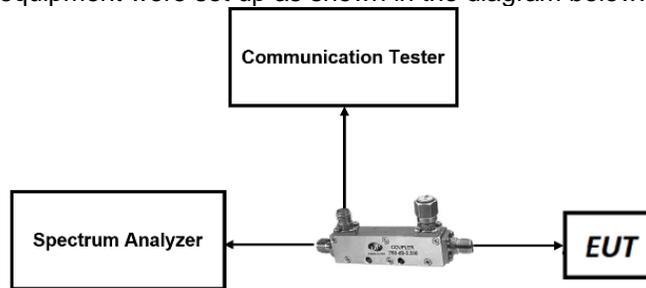



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device

LTE Band 26

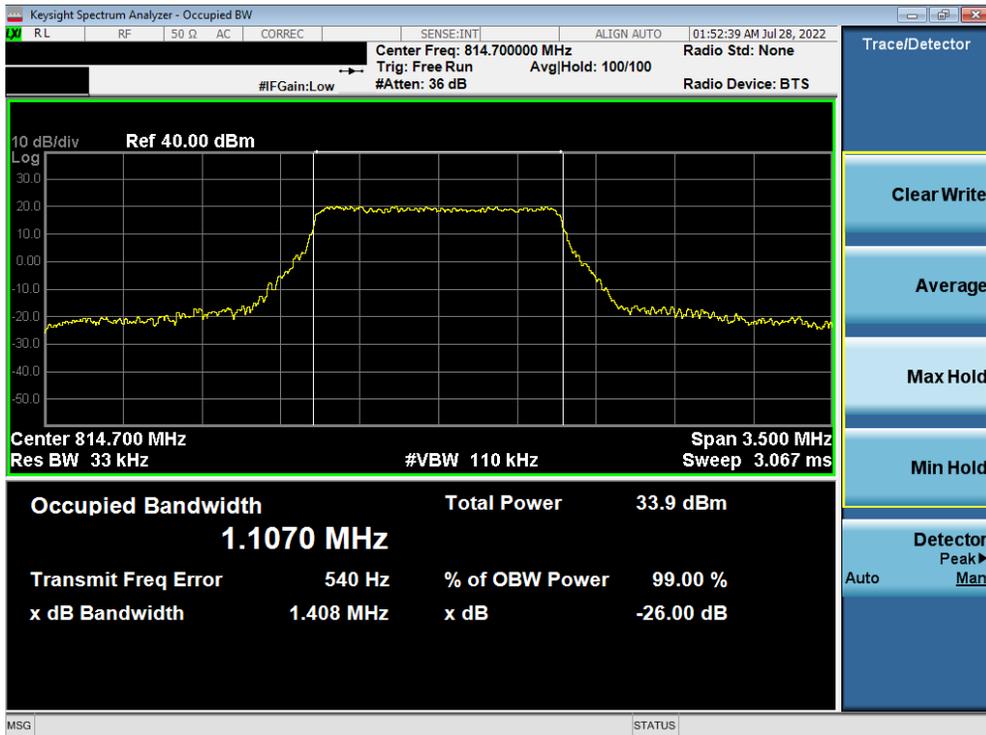


Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz QPSK - Full RB Configuration)

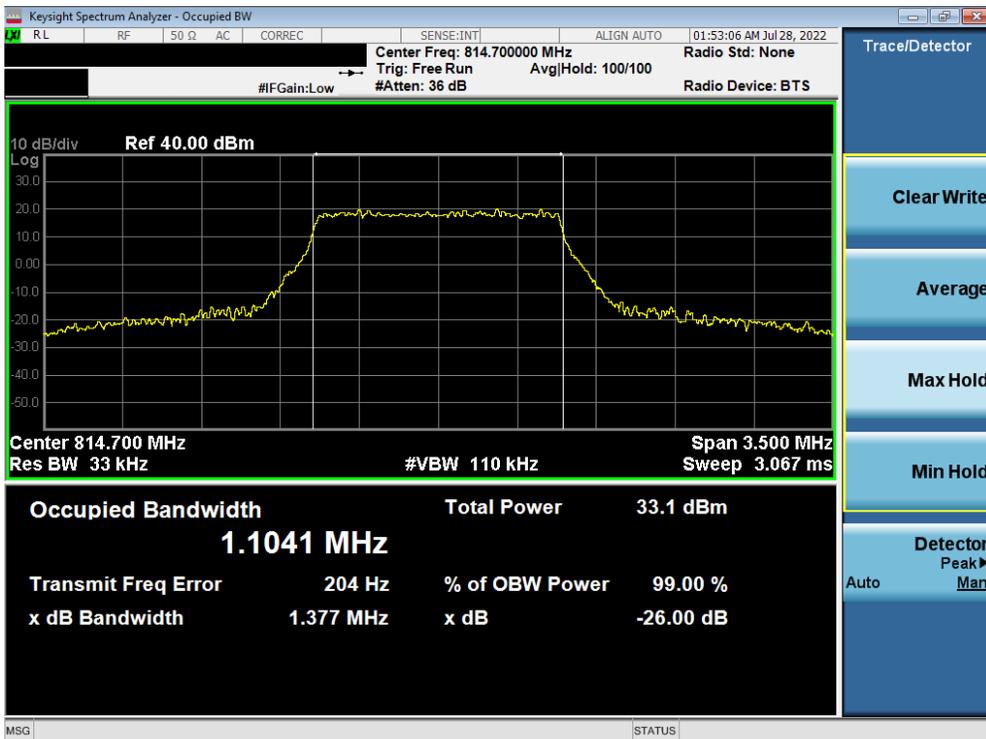


Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 15 of 101		

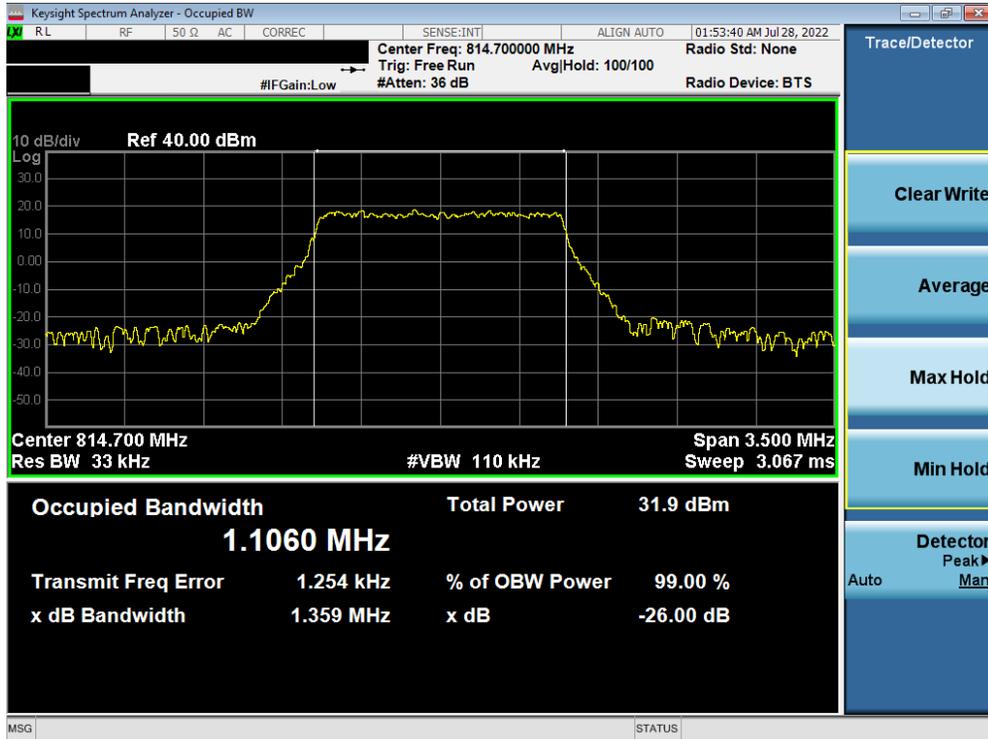


Plot 7-3. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 64-QAM - Full RB Configuration)

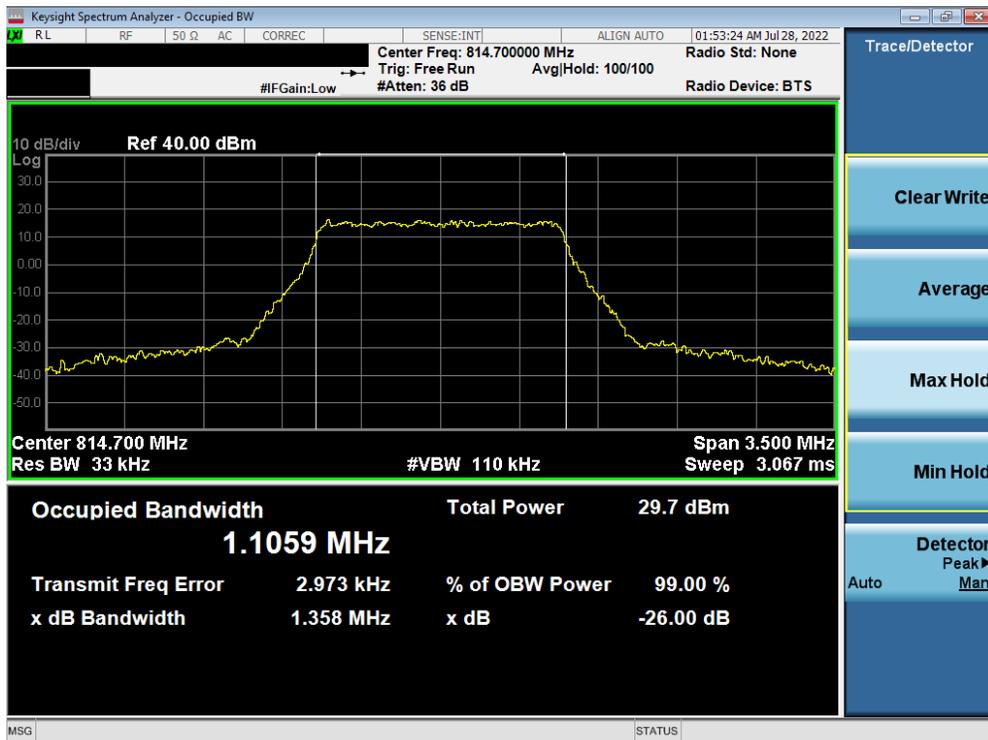


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 16 of 101		

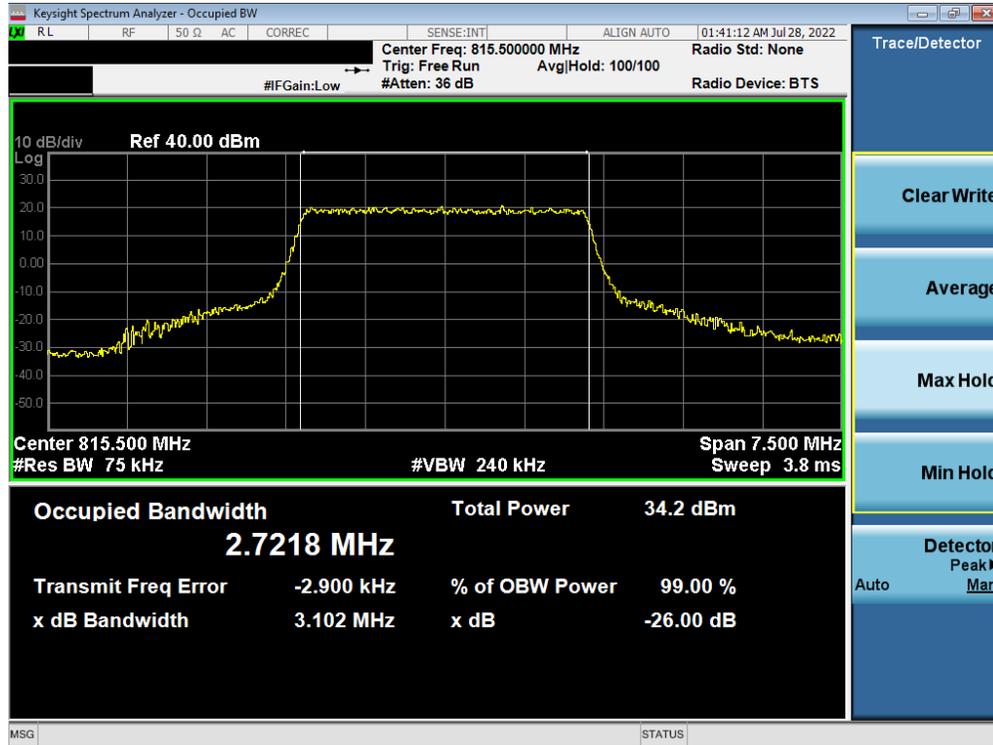


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26 - 3MHz QPSK - Full RB Configuration)

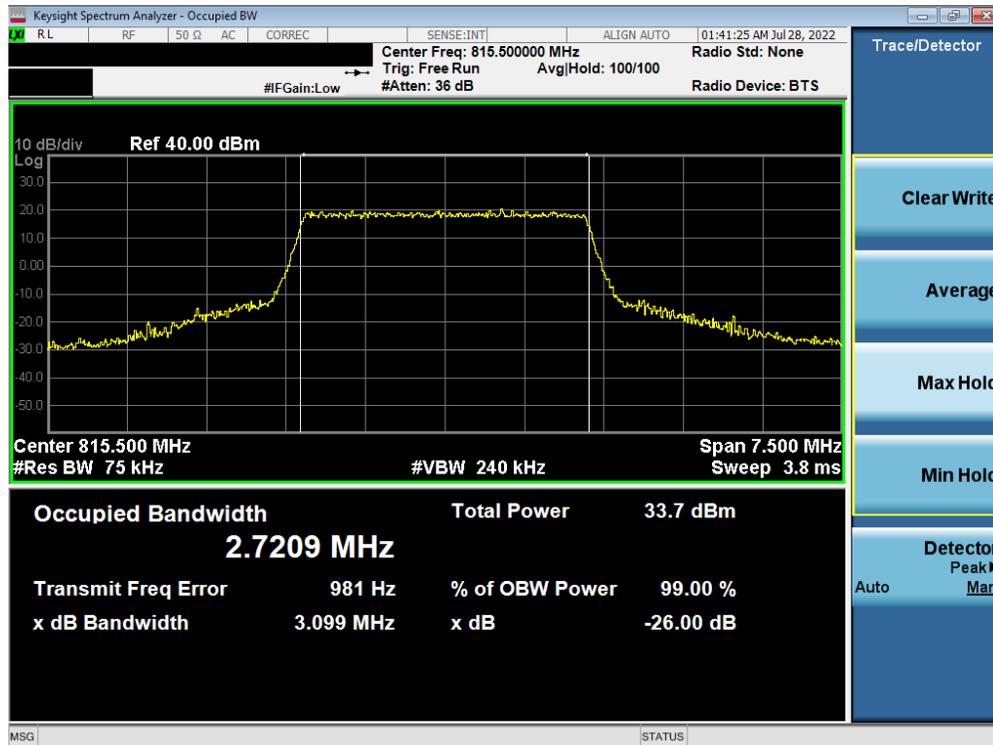

Plot 7-6. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 17 of 101		

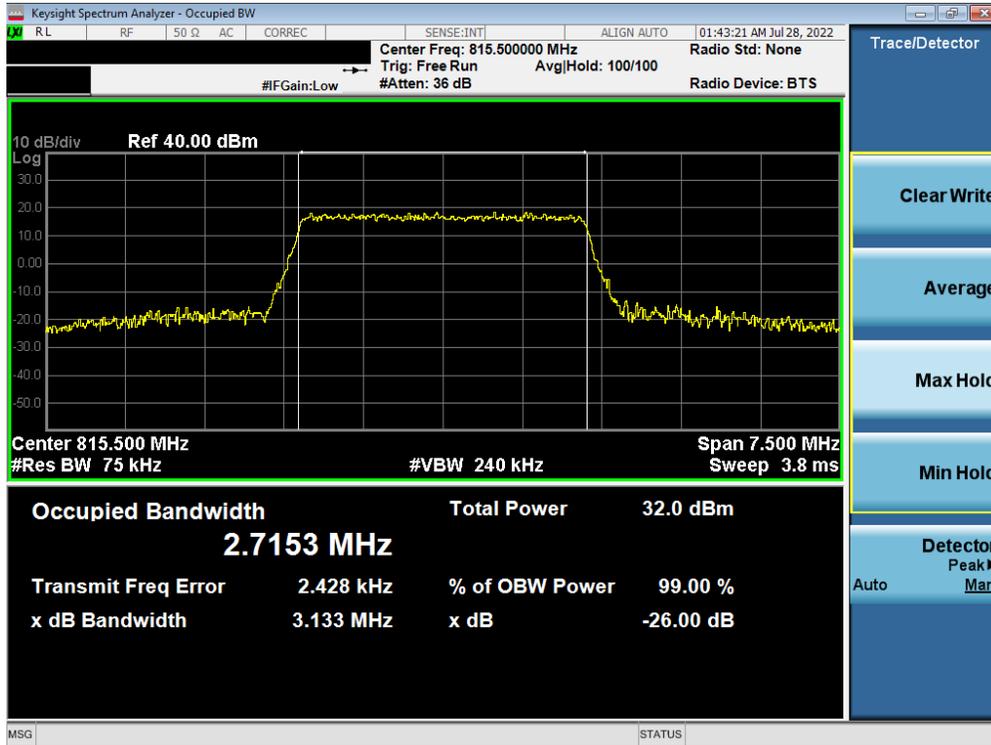


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 64-QAM - Full RB Configuration)



Plot 7-8. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 18 of 101		

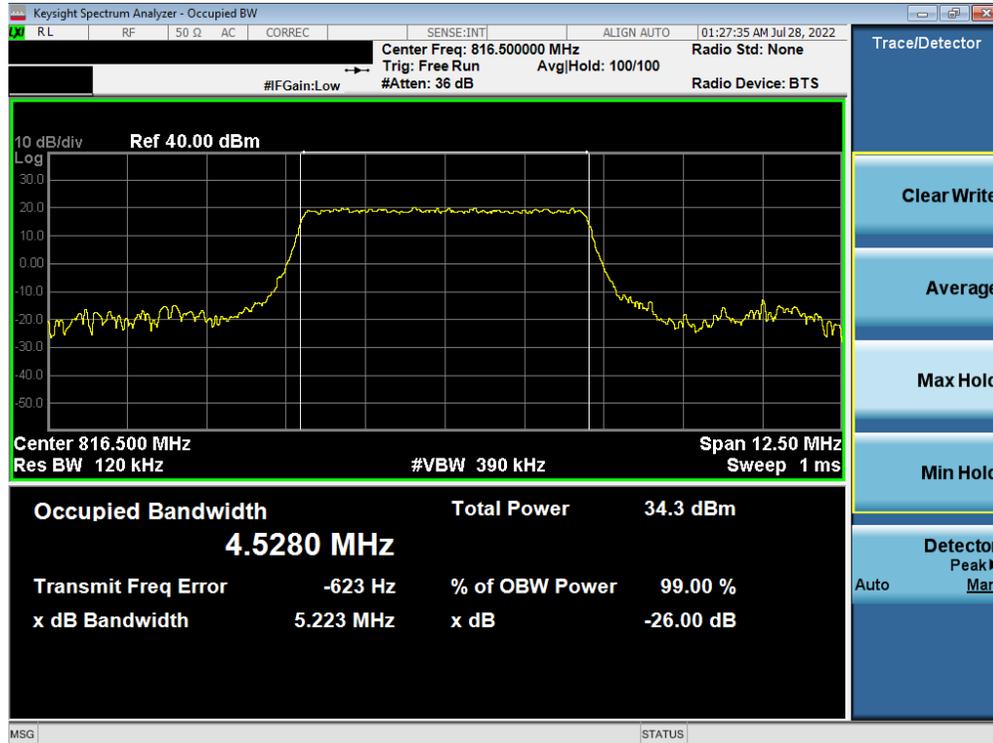


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26 - 5MHz QPSK - Full RB Configuration)



Plot 7-10. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 19 of 101		

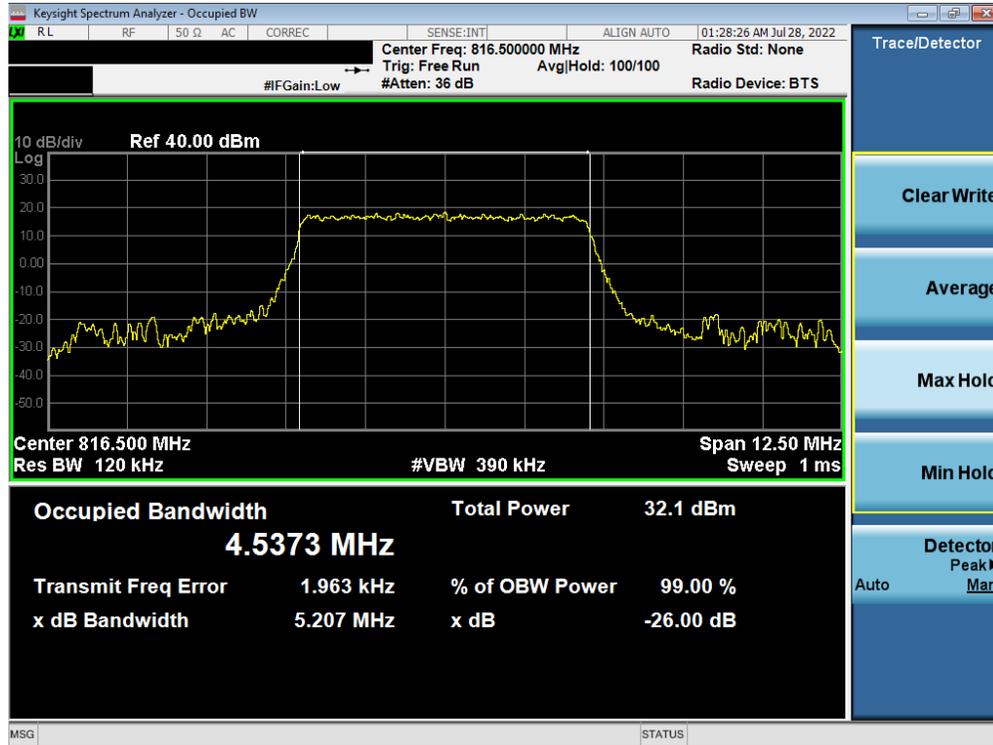


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 64-QAM - Full RB Configuration)




Plot 7-12. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 20 of 101		

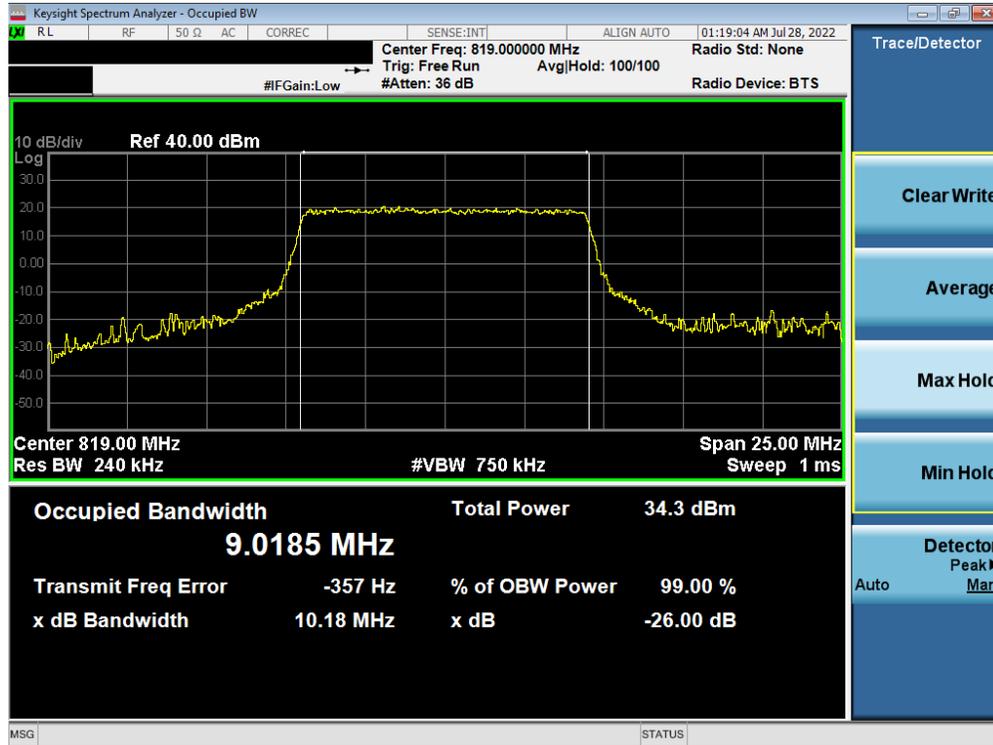


Plot 7-13. Occupied Bandwidth Plot (LTE Band 26 - 10MHz QPSK - Full RB Configuration)

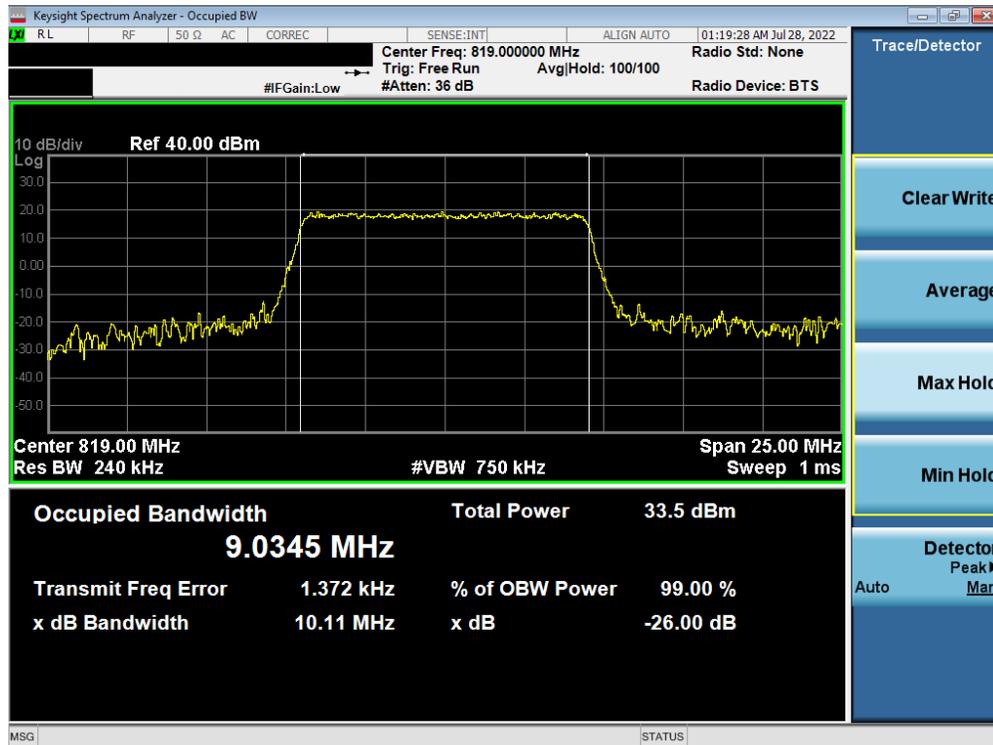


Plot 7-14. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 21 of 101		

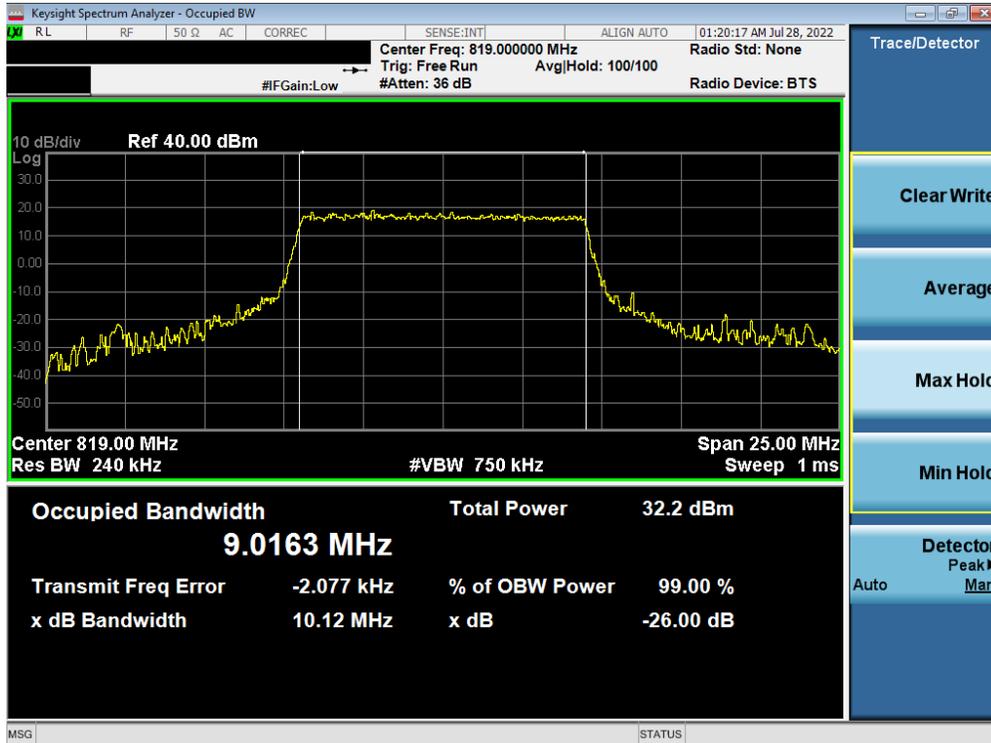


Plot 7-15. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 64-QAM - Full RB Configuration)

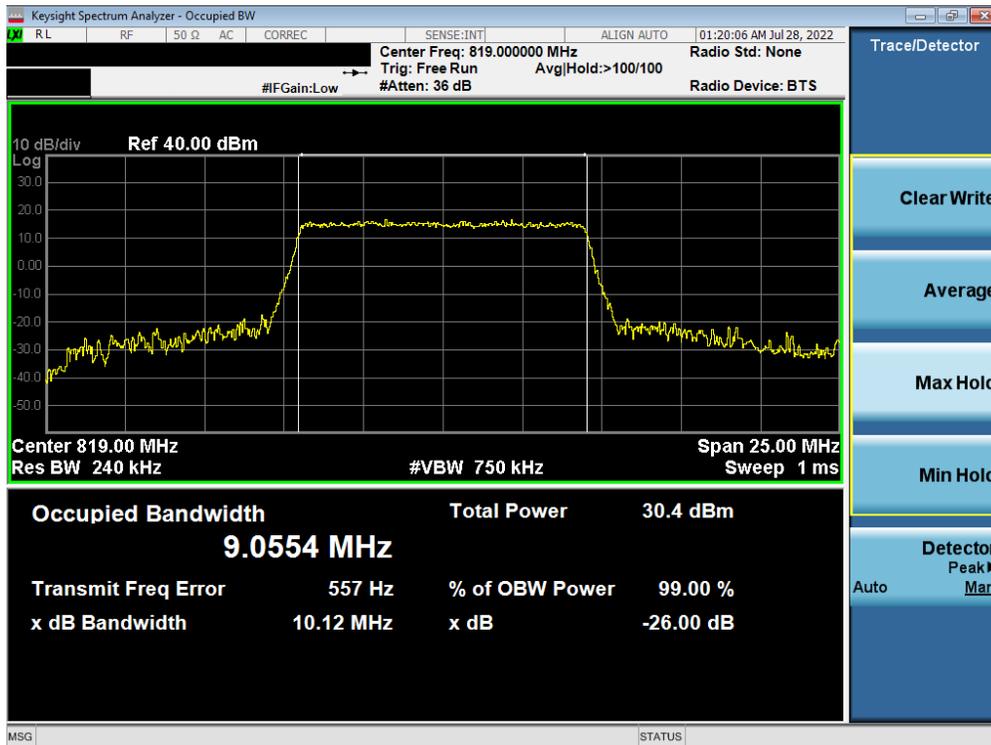


Plot 7-16. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 22 of 101		

LTE Band 14

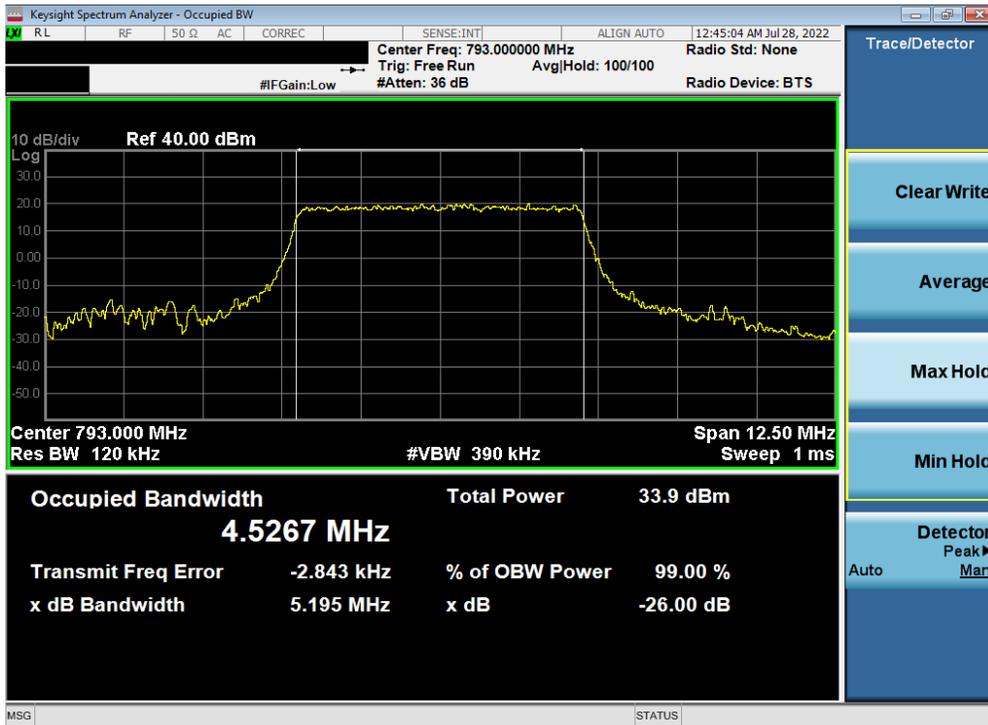


Plot 7-17. Occupied Bandwidth Plot (LTE Band 14 - 5MHz QPSK - Full RB Configuration)

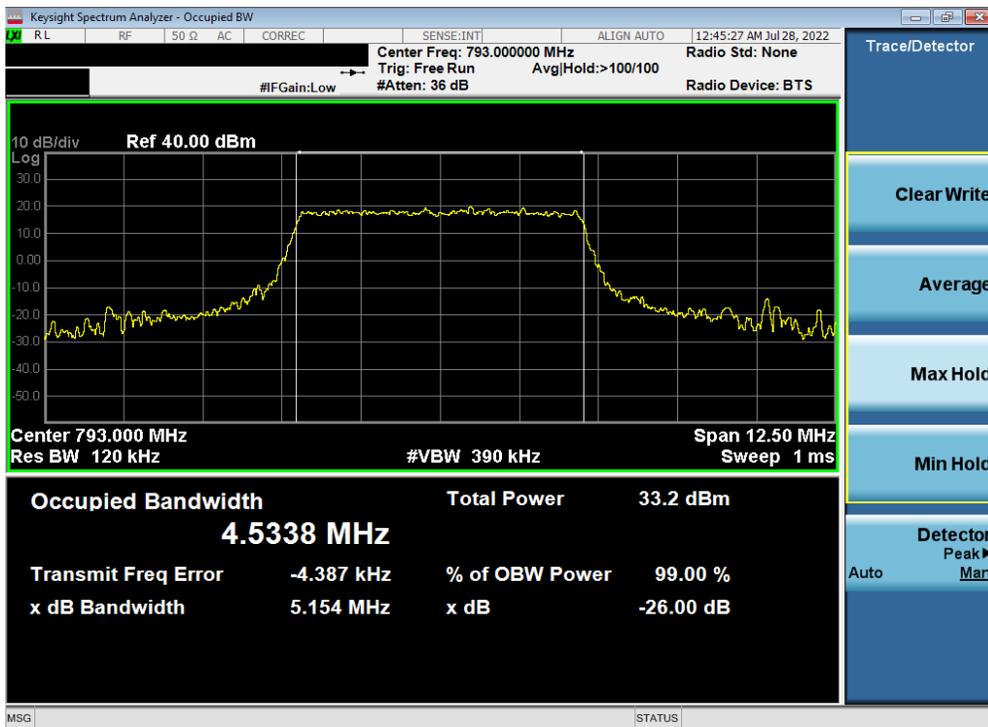


Plot 7-18. Occupied Bandwidth Plot (LTE Band 14 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 23 of 101		

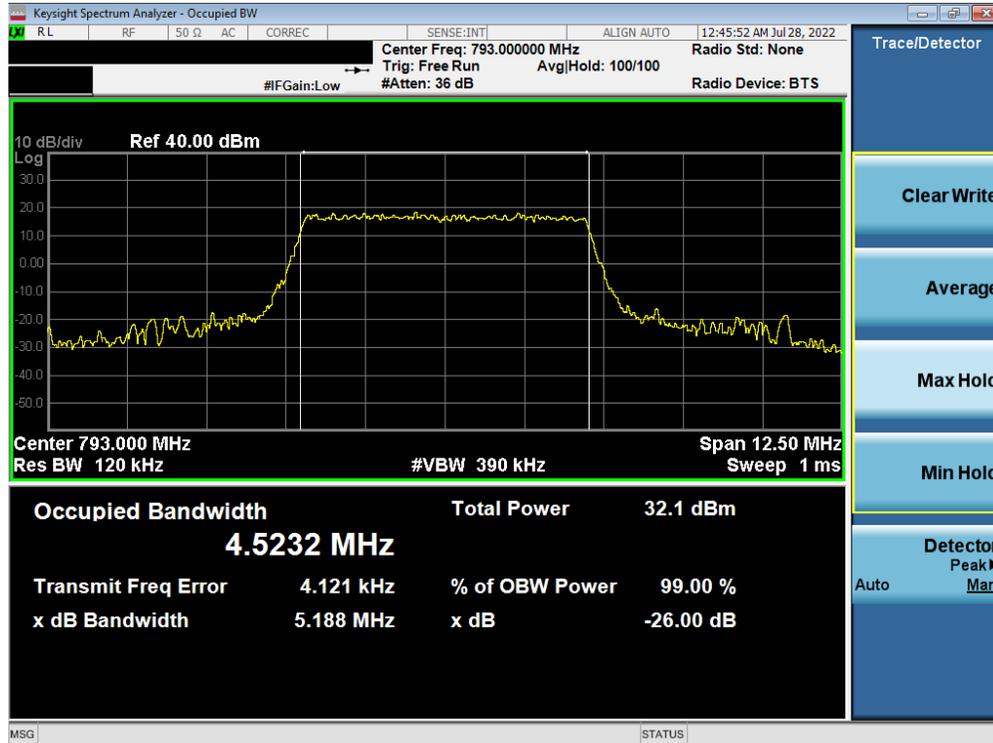


Plot 7-19. Occupied Bandwidth Plot (LTE Band 14 - 5MHz 64-QAM - Full RB Configuration)

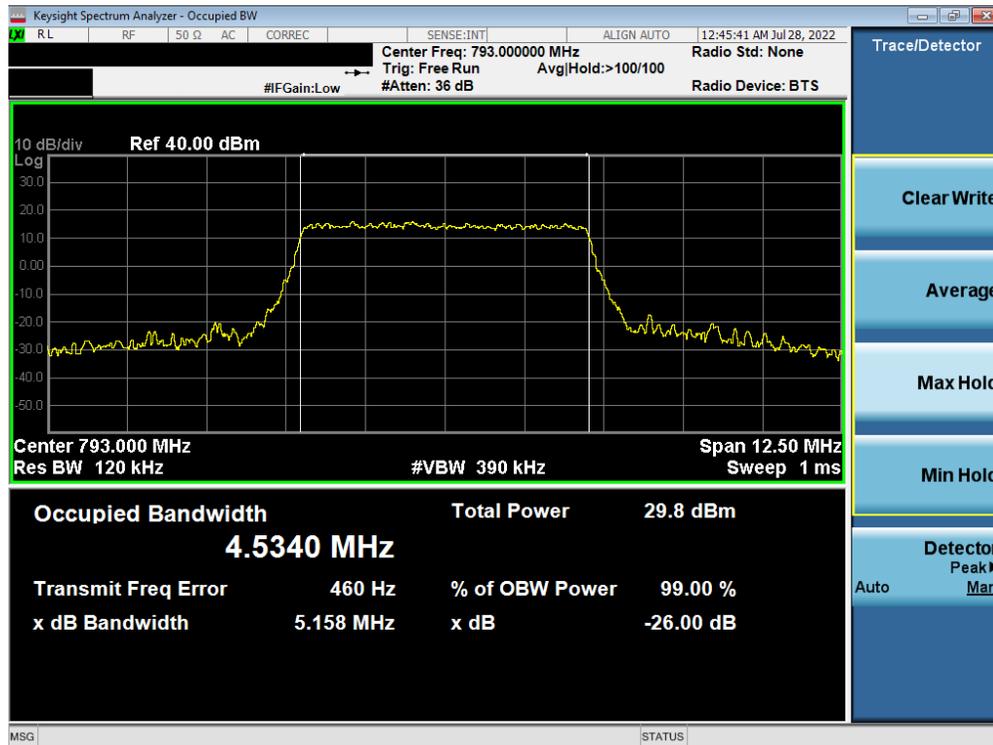


Plot 7-20. Occupied Bandwidth Plot (LTE Band 14 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 24 of 101		

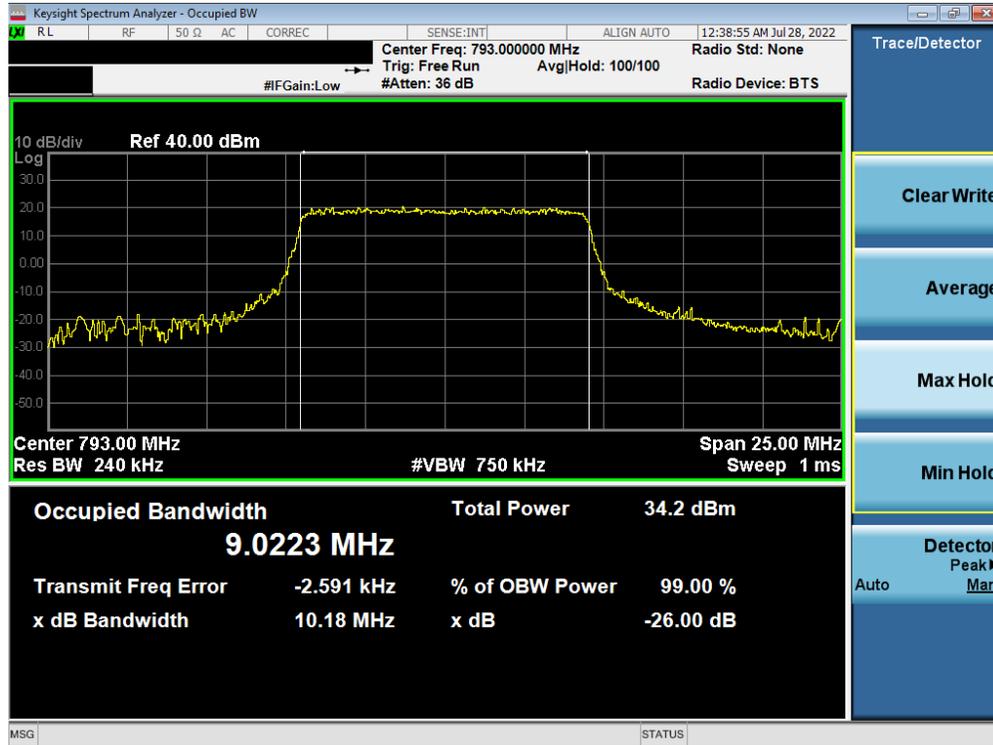


Plot 7-21. Occupied Bandwidth Plot (LTE Band 14 - 10MHz QPSK - Full RB Configuration)

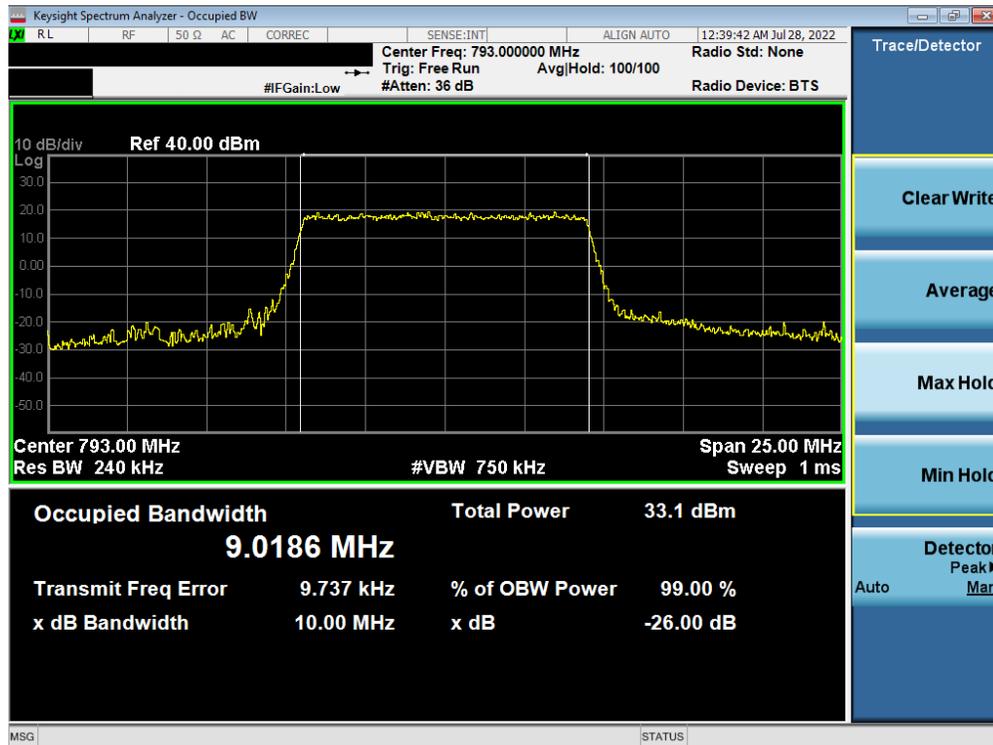

Plot 7-22. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 25 of 101		

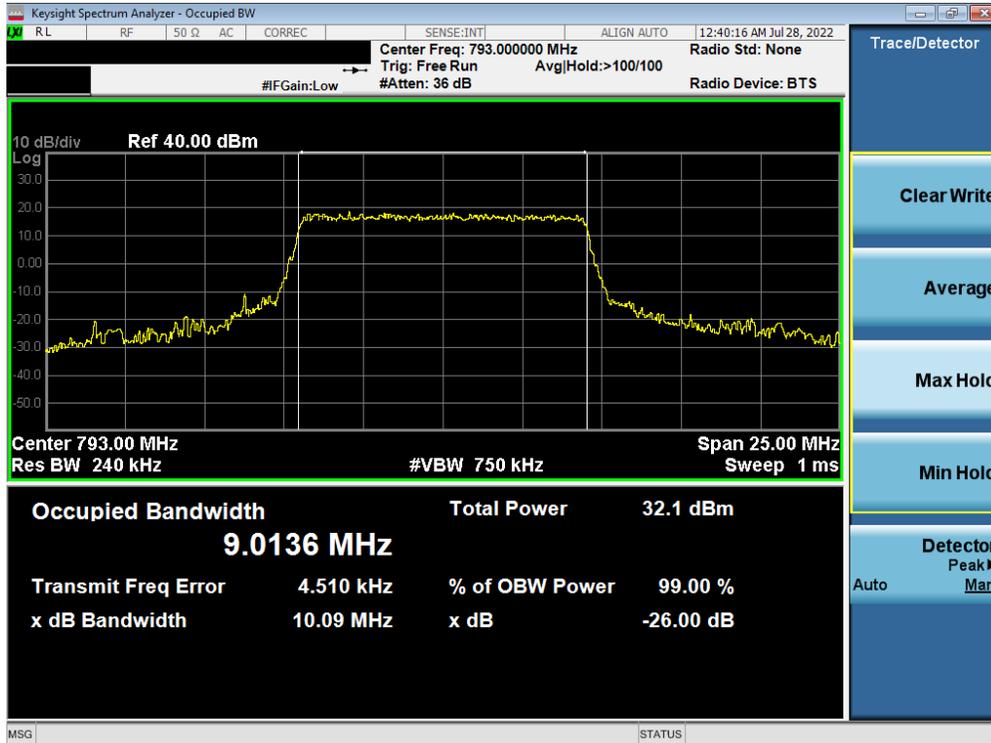


Plot 7-23. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 64-QAM - Full RB Configuration)




Plot 7-24. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 26 of 101		

NR Band n14

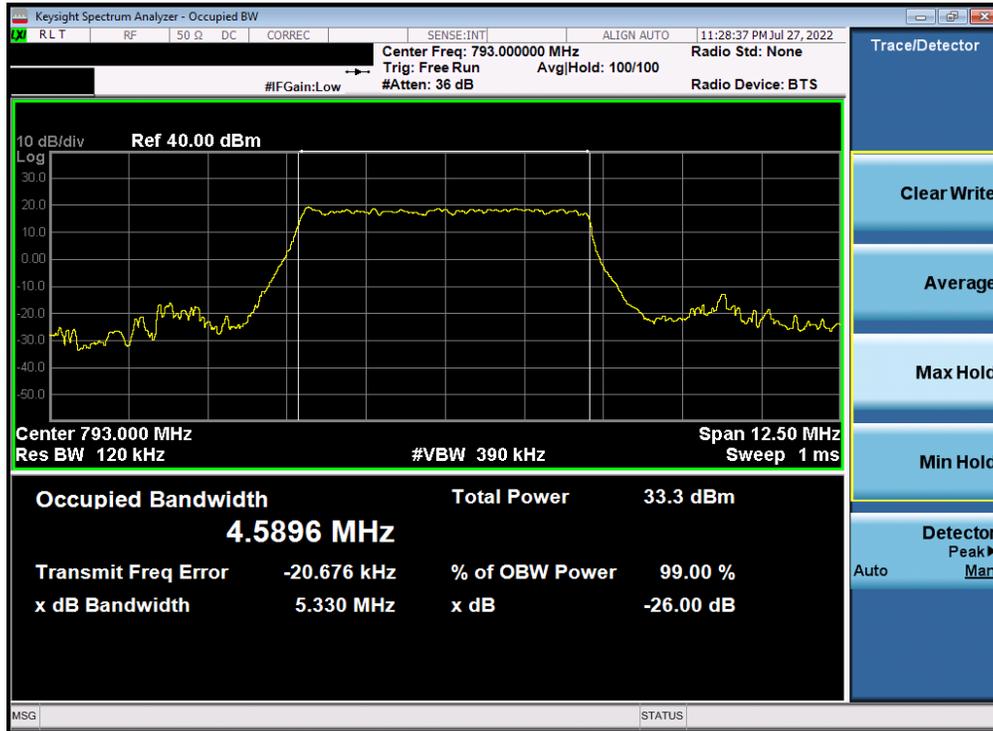


Plot 7-25. Occupied Bandwidth Plot (NR Band 14 - 5MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB Configuration)

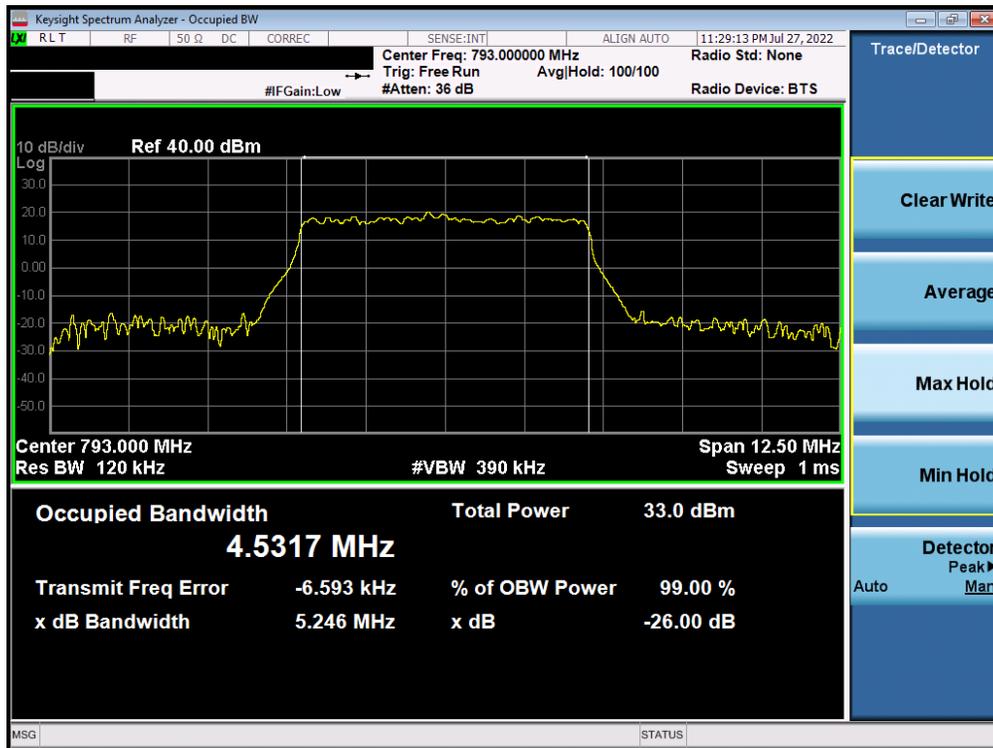


Plot 7-26. Occupied Bandwidth Plot (NR Band 14 - 5MHz DFT-s-OFDM QPSK - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 27 of 101		

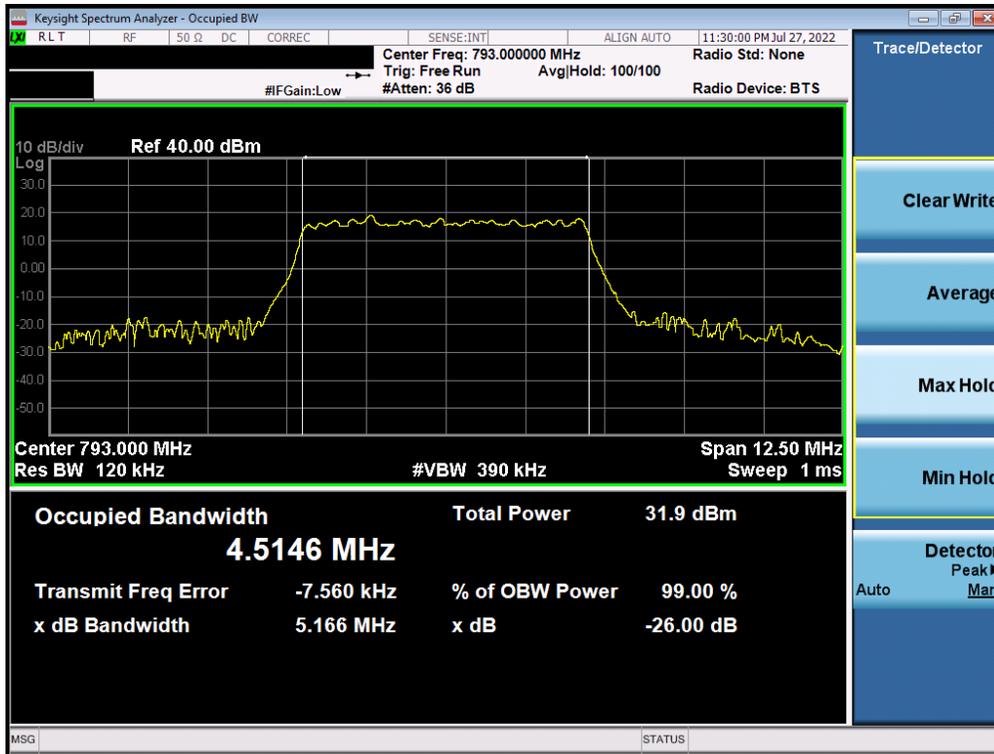


Plot 7-27. Occupied Bandwidth Plot (NR Band 14 - 5MHz DFT-s-OFDM 16-QAM - Full RB Configuration)

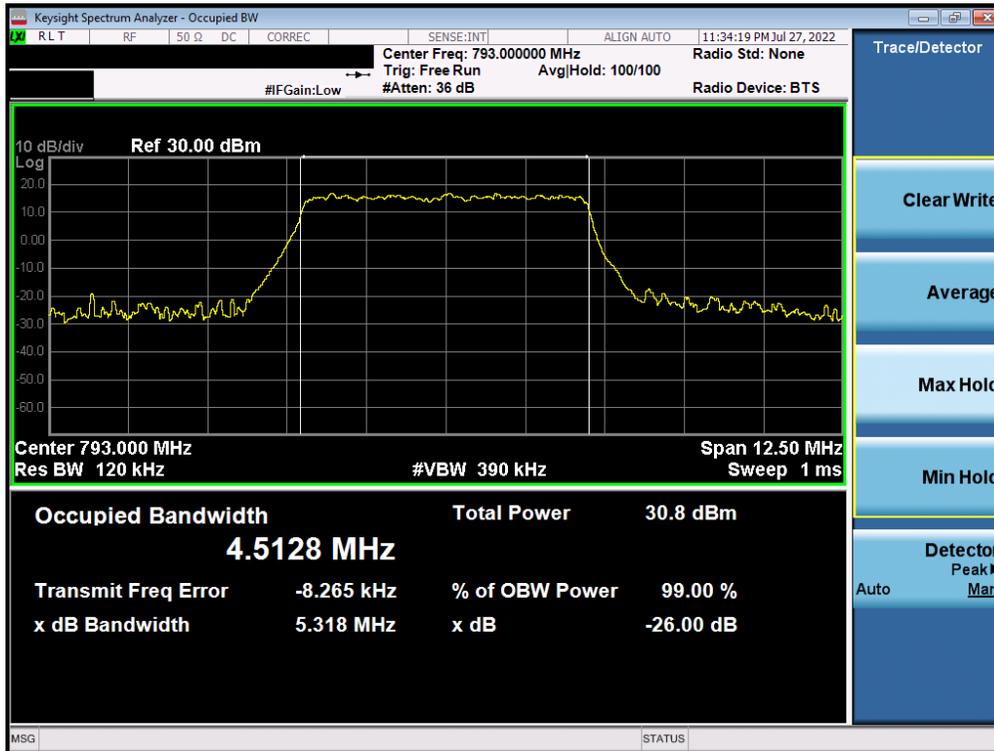

Plot 7-28. Occupied Bandwidth Plot (NR Band 14 - 5MHz CP-OFDM 64-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 28 of 101		

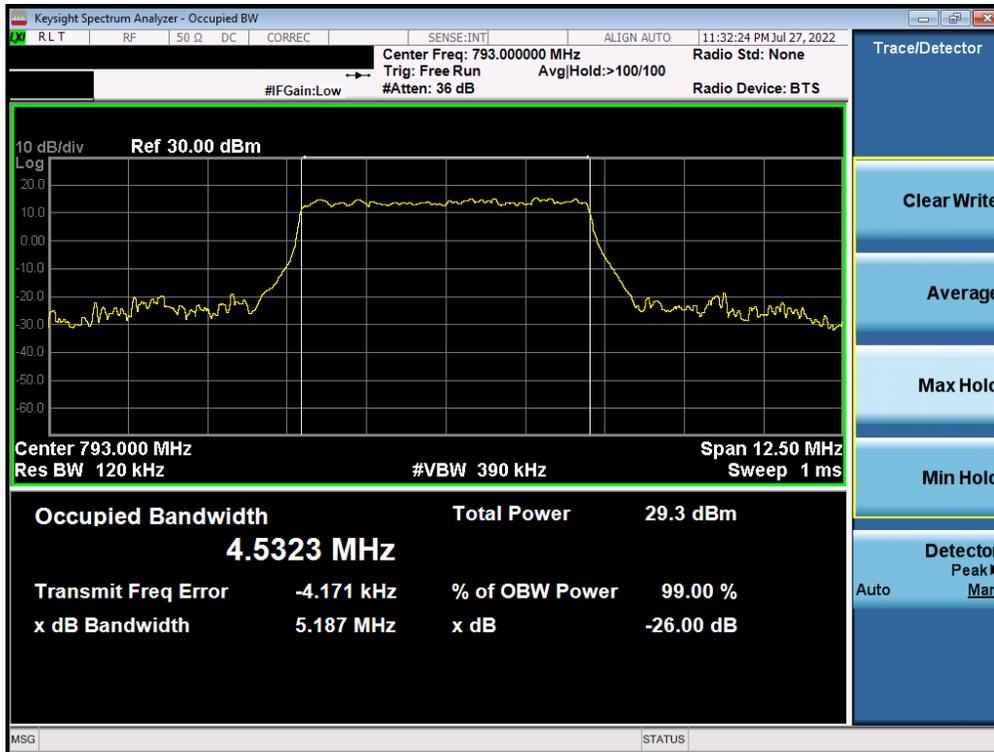


Plot 7-29. Occupied Bandwidth Plot (NR Band 14 - 5MHz DFT-s-OFDM 256-QAM - Full RB Configuration)



Plot 7-30. Occupied Bandwidth Plot (NR Band 14 - 10MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 29 of 101		

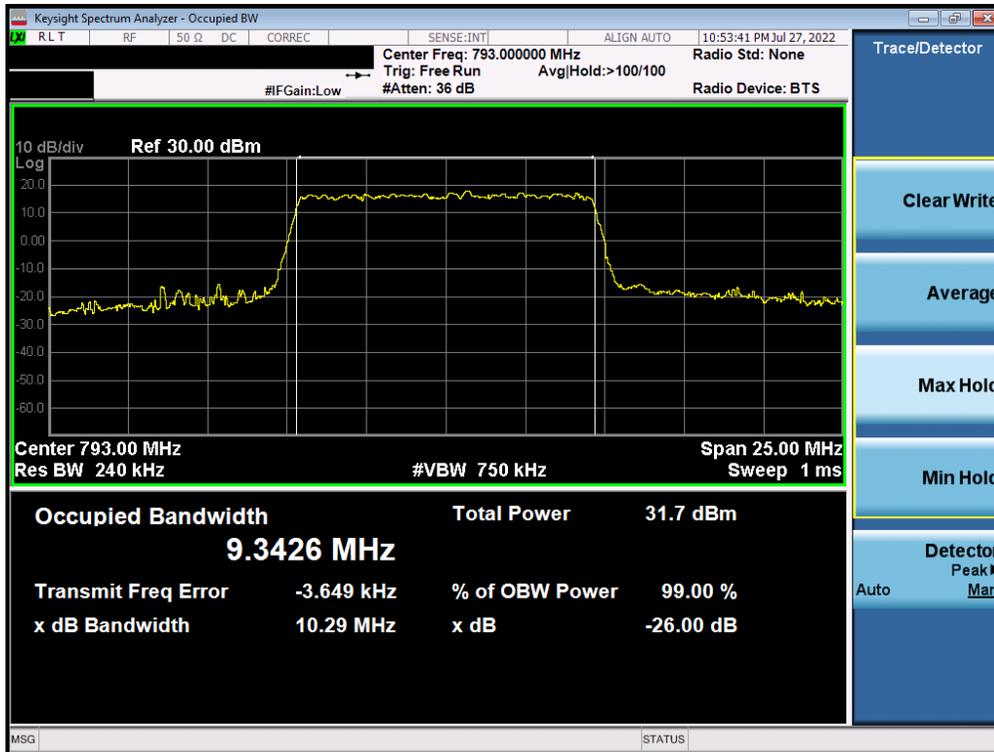


Plot 7-31. Occupied Bandwidth Plot (NR Band 14 - 10MHz CP-OFDM QPSK - Full RB Configuration)




Plot 7-32. Occupied Bandwidth Plot (NR Band 14 - 10MHz CP-OFDM 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 30 of 101		

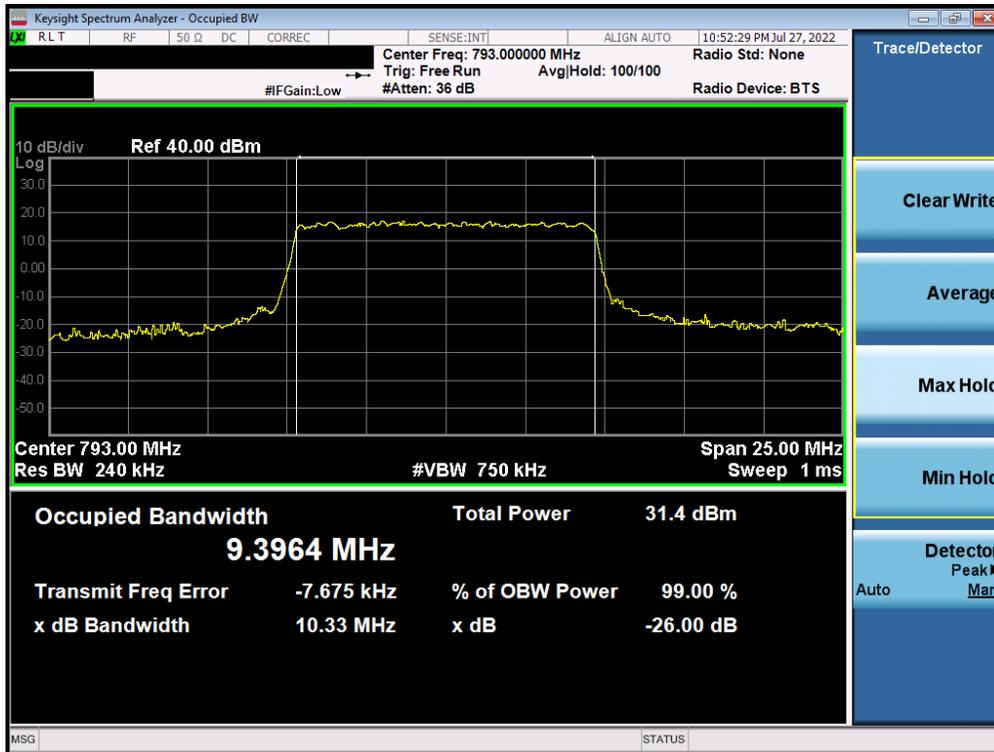


Plot 7-33. Occupied Bandwidth Plot (NR Band 14 - 10MHz CP-OFDM 64-QAM - Full RB Configuration)

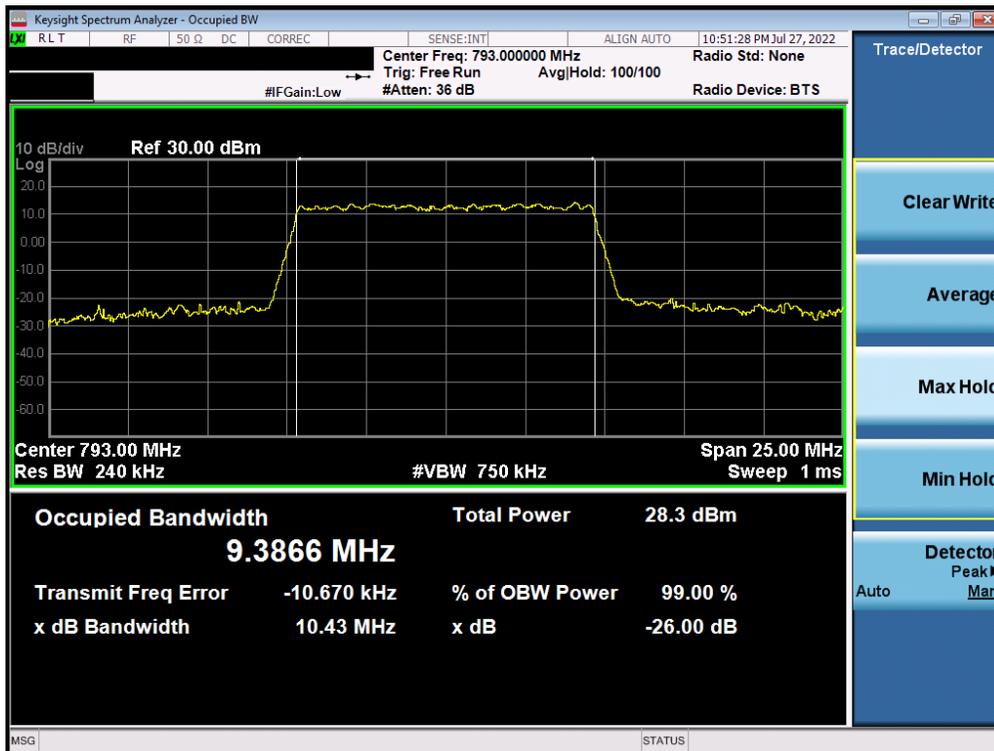


Plot 7-34. Occupied Bandwidth Plot (NR Band 14 - 10MHz CP-OFDM 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 31 of 101		

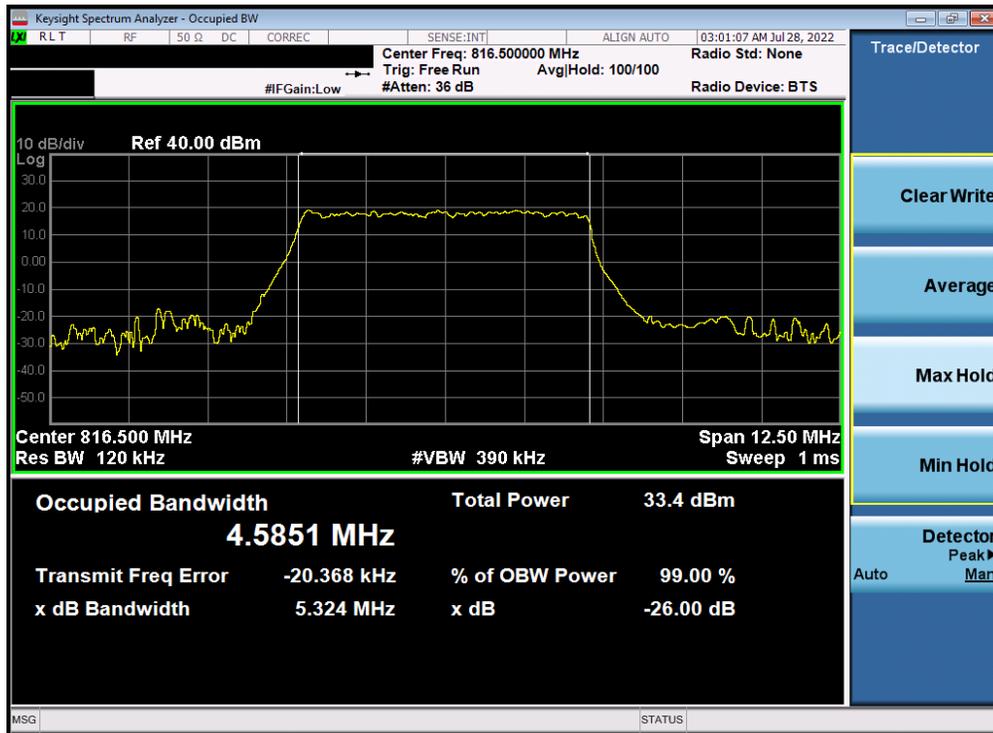


Plot 7-35. Occupied Bandwidth Plot (NR Band 26 - 5MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB Configuration)

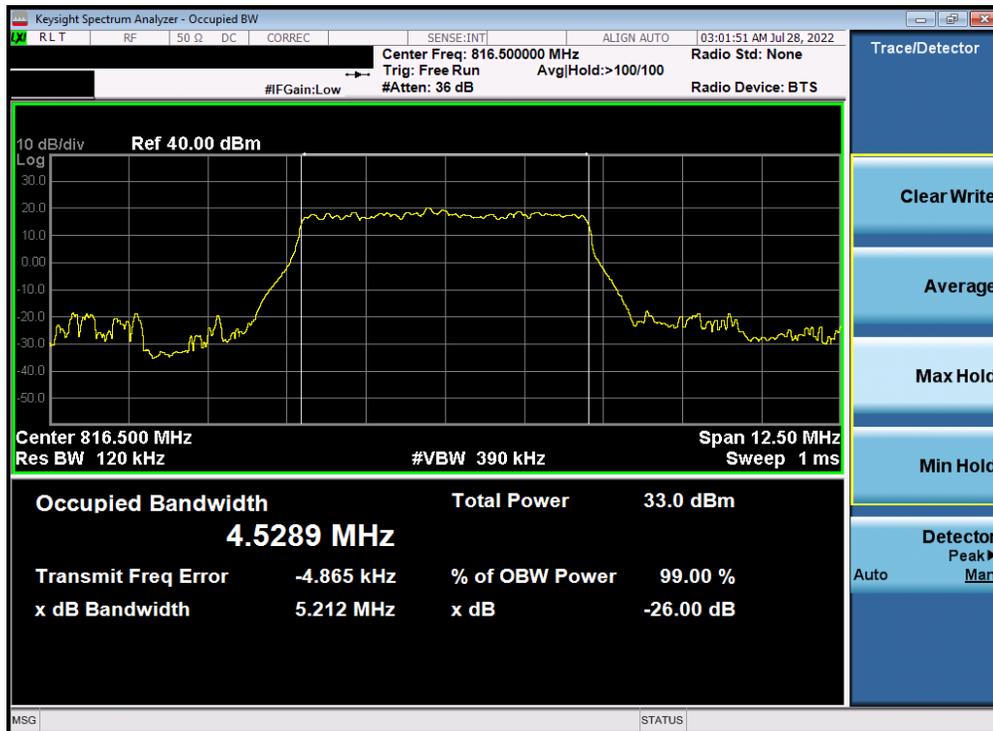


Plot 7-36. Occupied Bandwidth Plot (NR Band 26 - 5MHz DFT-s-OFDM QPSK - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 32 of 101		

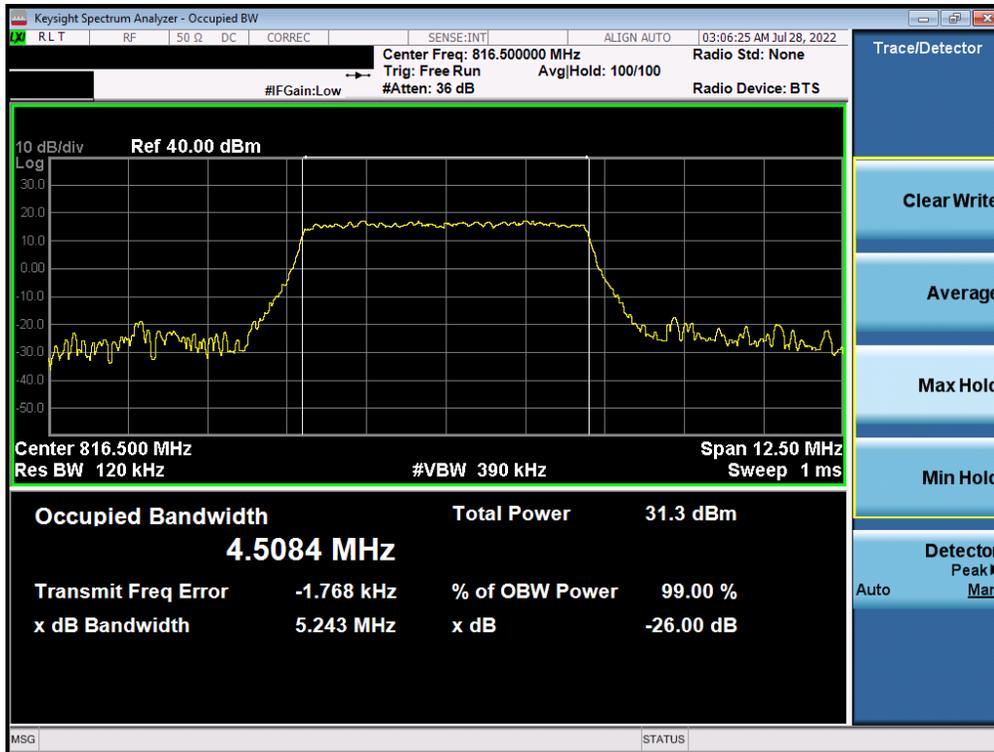

Plot 7-37. Occupied Bandwidth Plot (NR Band 26 - 5MHz CP-OFDM 16-QAM - Full RB Configuration)

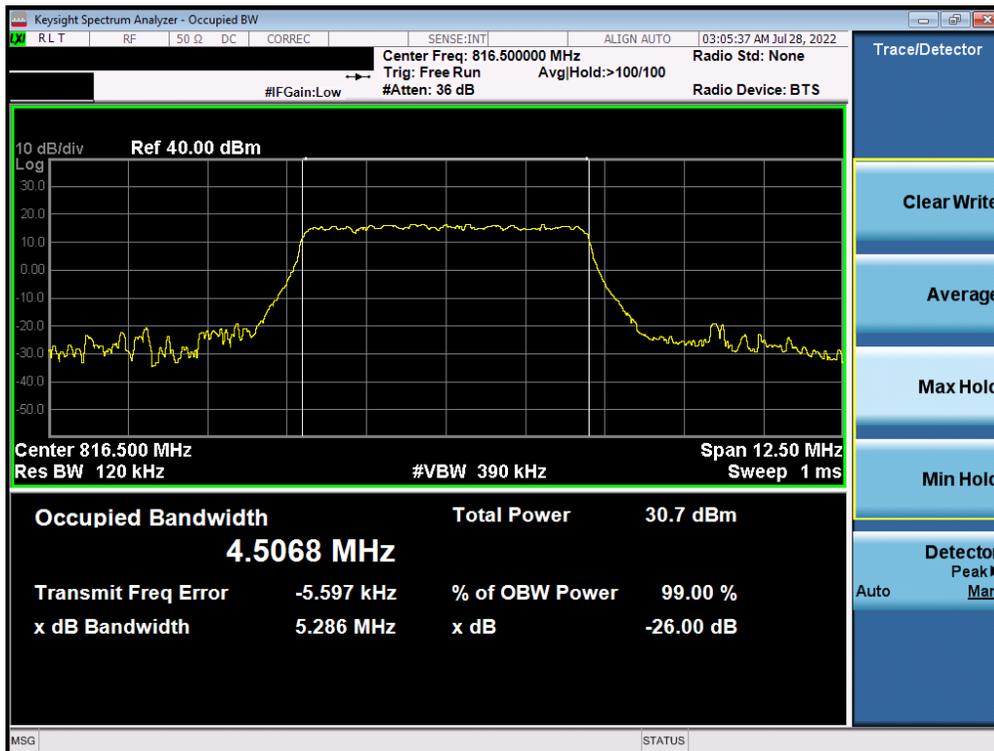


Plot 7-38. Occupied Bandwidth Plot (NR Band 26 - 5MHz CP-OFDM 64-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 33 of 101		




Plot 7-39. Occupied Bandwidth Plot (NR Band 26 - 5MHz CP-OFDM 256-QAM - Full RB Configuration)

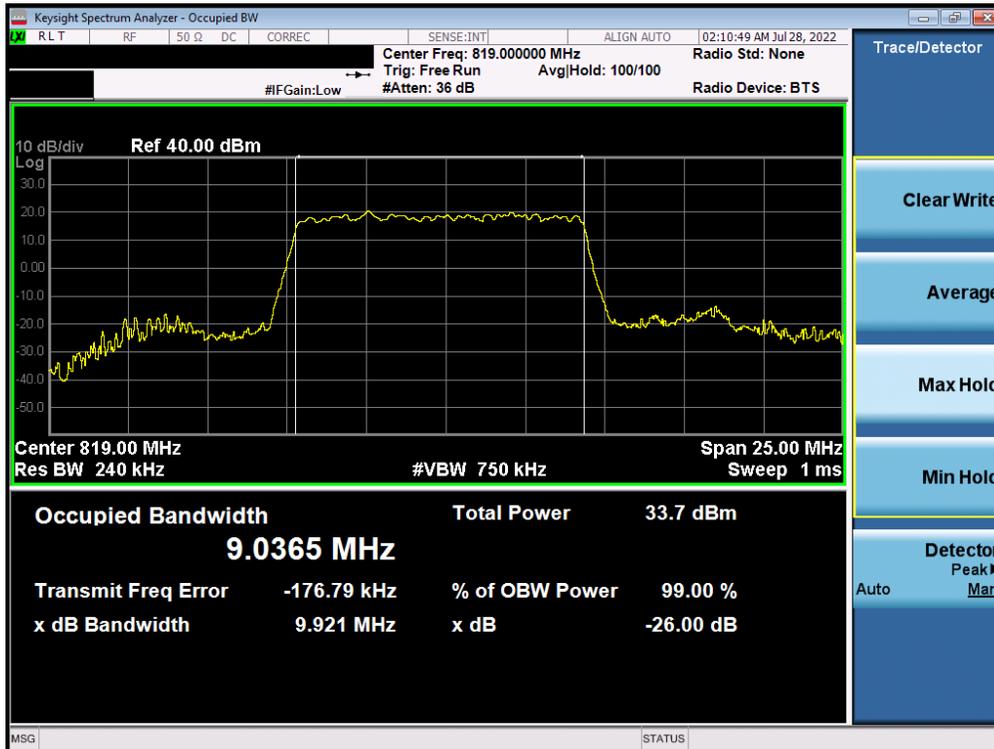


Plot 7-40. Occupied Bandwidth Plot (NR Band 26 - 10MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 34 of 101		

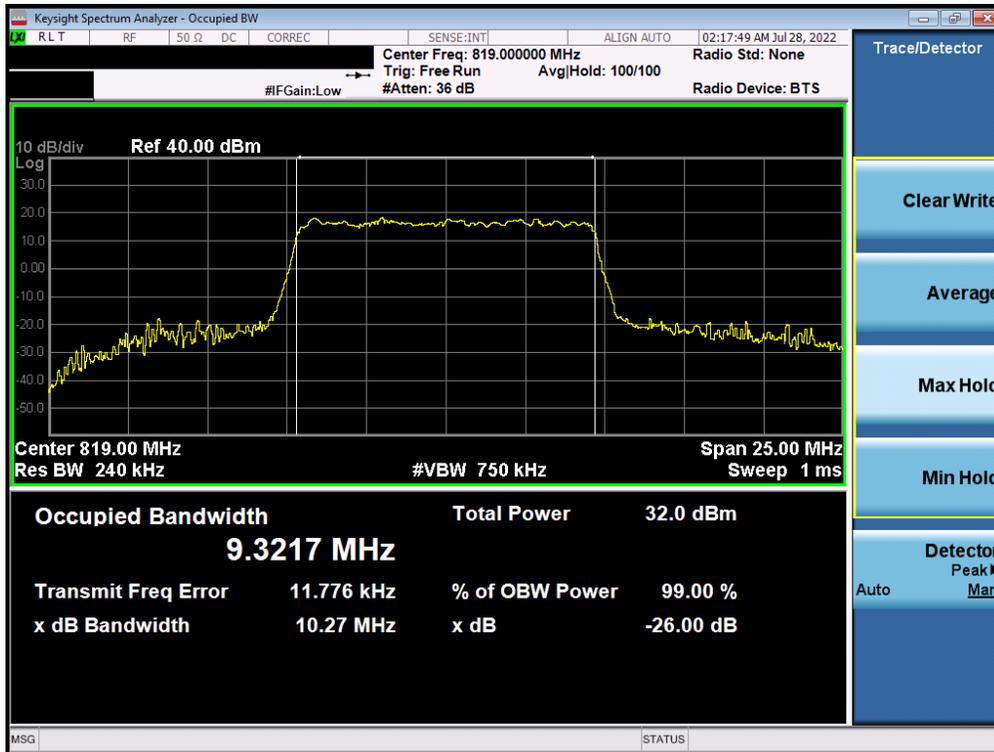


Plot 7-41. Occupied Bandwidth Plot (NR Band 26 - 10MHz CP-OFDM QPSK - Full RB Configuration)

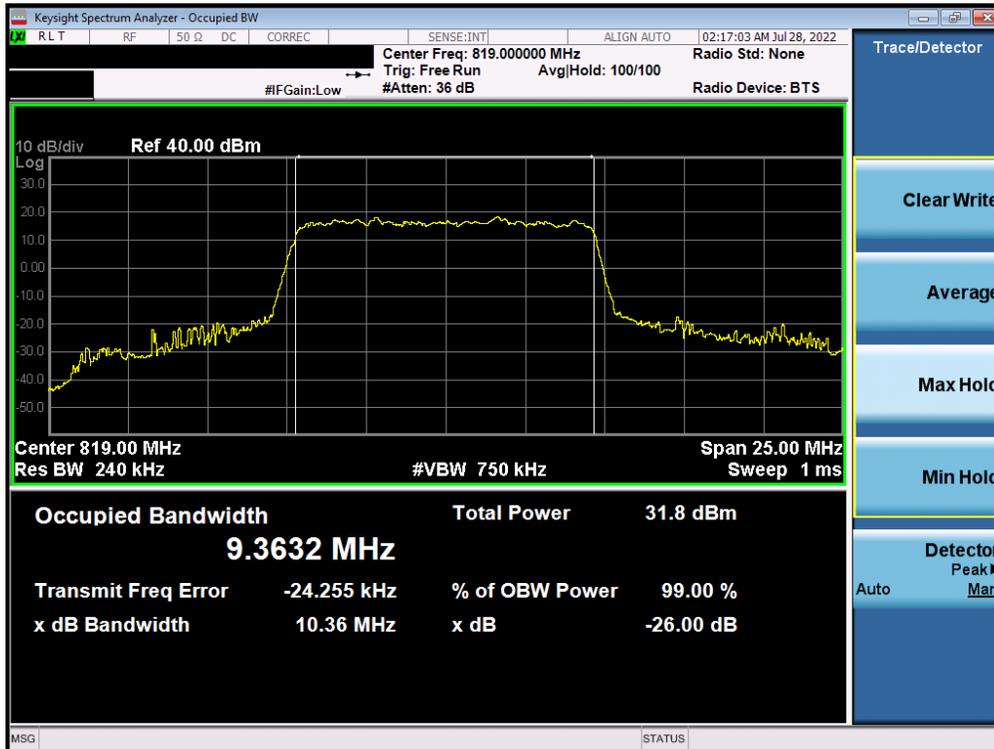


Plot 7-42. Occupied Bandwidth Plot (NR Band 26 - 10MHz CP-OFDM 16-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 35 of 101		

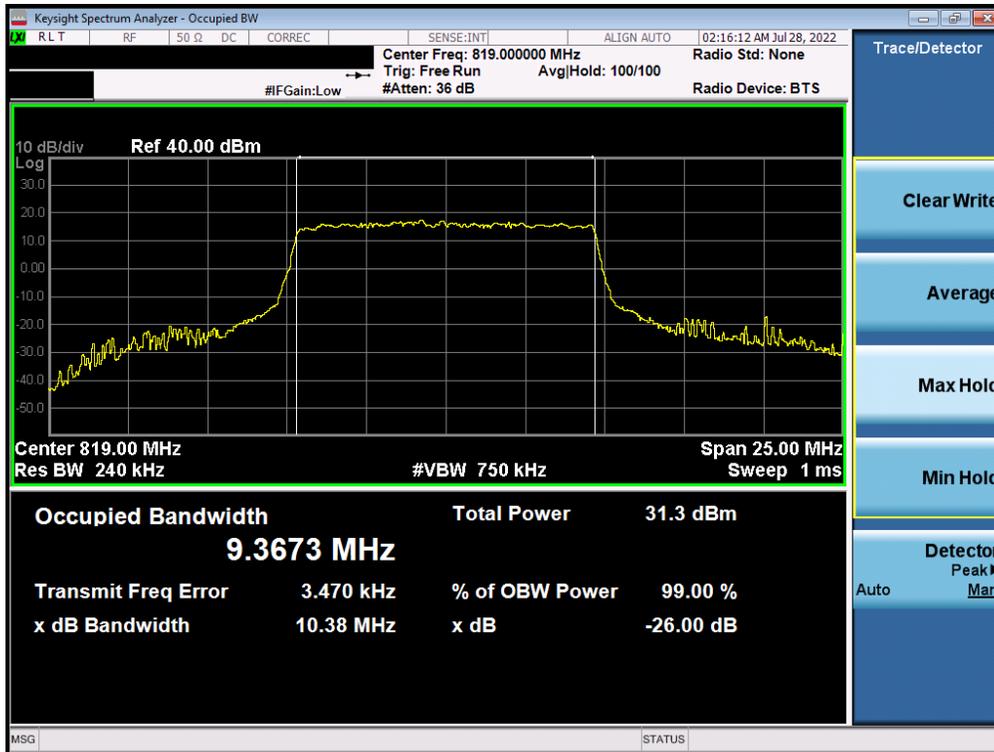

Plot 7-43. Occupied Bandwidth Plot (NR Band 26 - 10MHz CP-OFDM 64-QAM - Full RB Configuration)

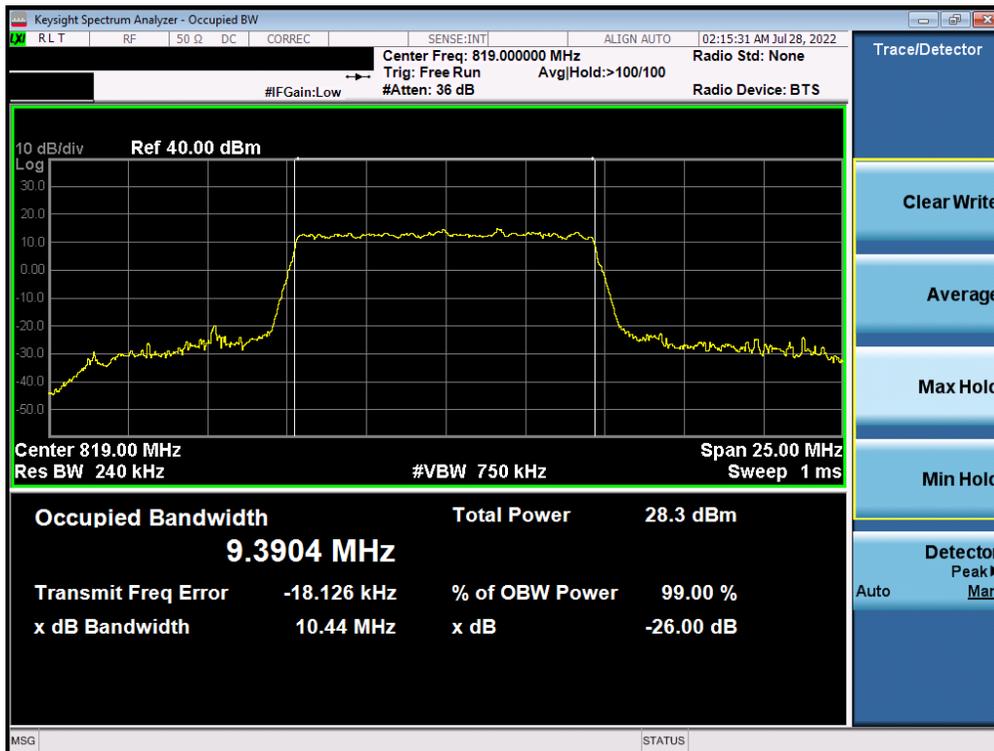

Plot 7-44. Occupied Bandwidth Plot (NR Band 26 - 10MHz CP-OFDM 256-QAM - Full RB Configuration)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 36 of 101		

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §90(S).691(a) §90(R).543(e)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation and all ports were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 100kHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

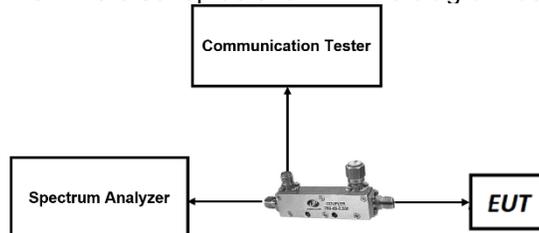



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 90. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCGA2435	 PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
© 2022 Element Washington DC LLC		Page 37 of 101

LTE Band 26

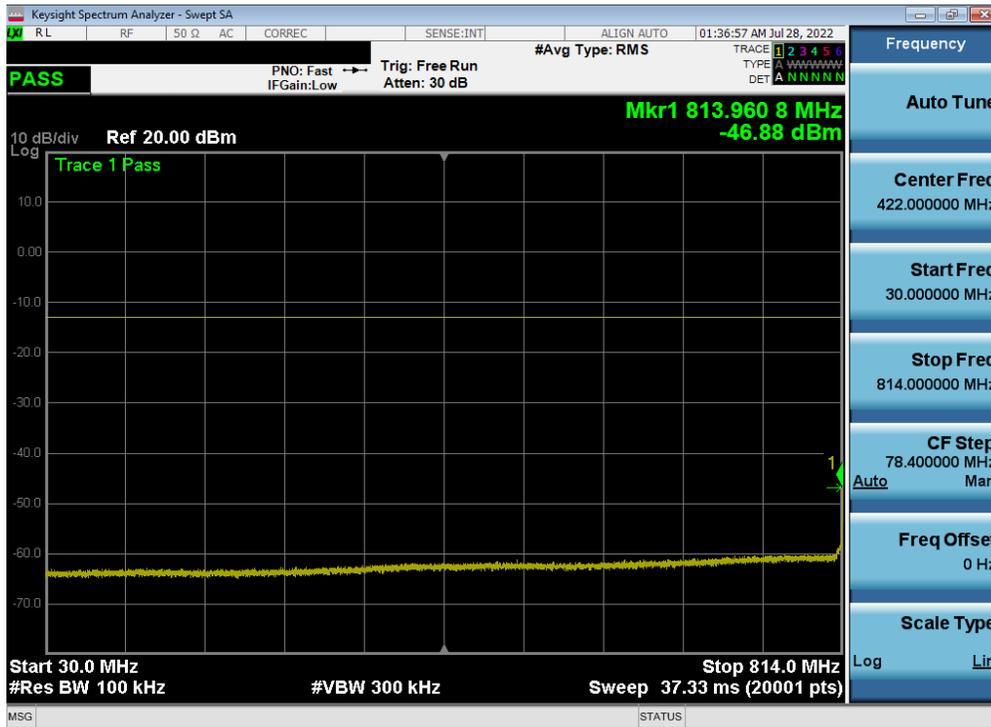


Plot 7-45. Conducted Spurious Plot (LTE Band 26 - 5MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

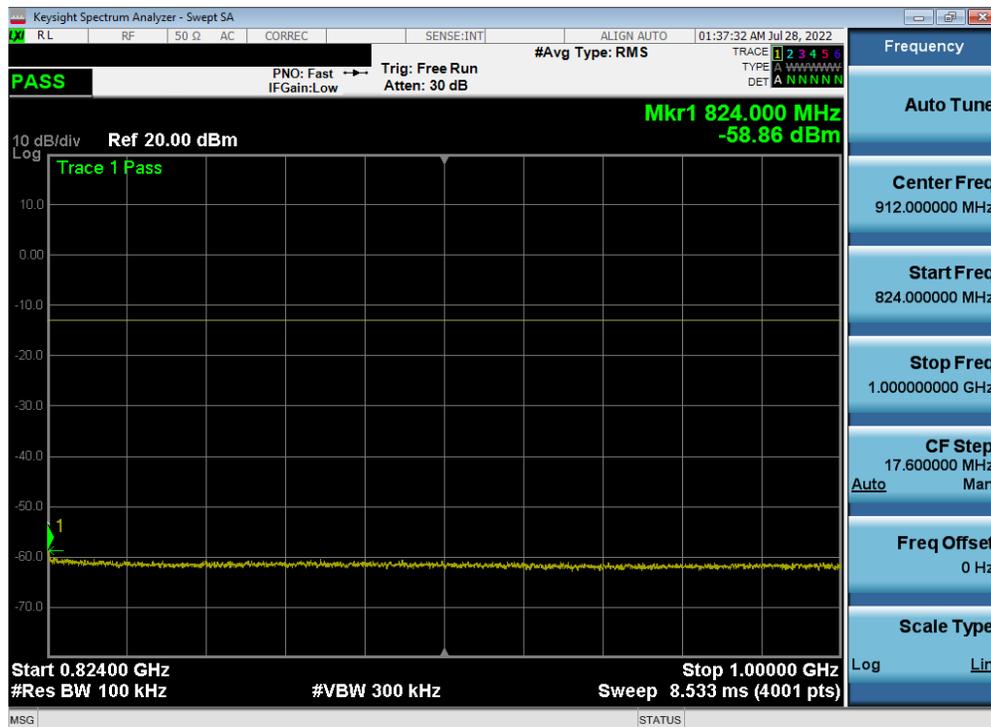


Plot 7-46. Conducted Spurious Plot (LTE Band 26 - 5MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
		Page 38 of 101

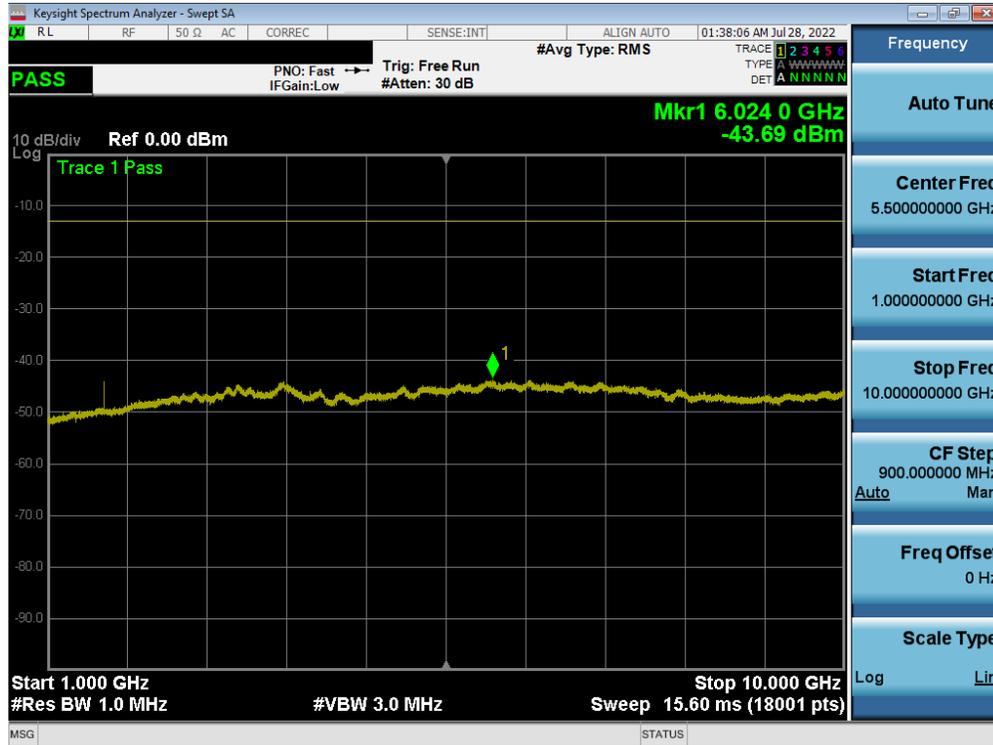


Plot 7-47. Conducted Spurious Plot (LTE Band 26 - 5MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

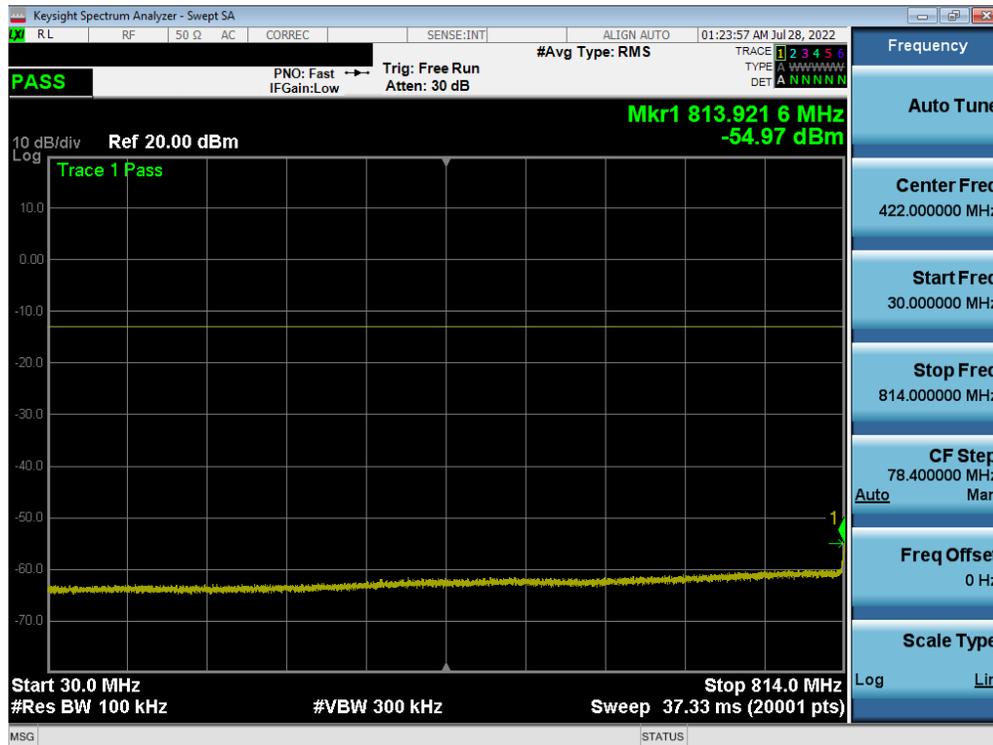


Plot 7-48. Conducted Spurious Plot (LTE Band 26 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 39 of 101		

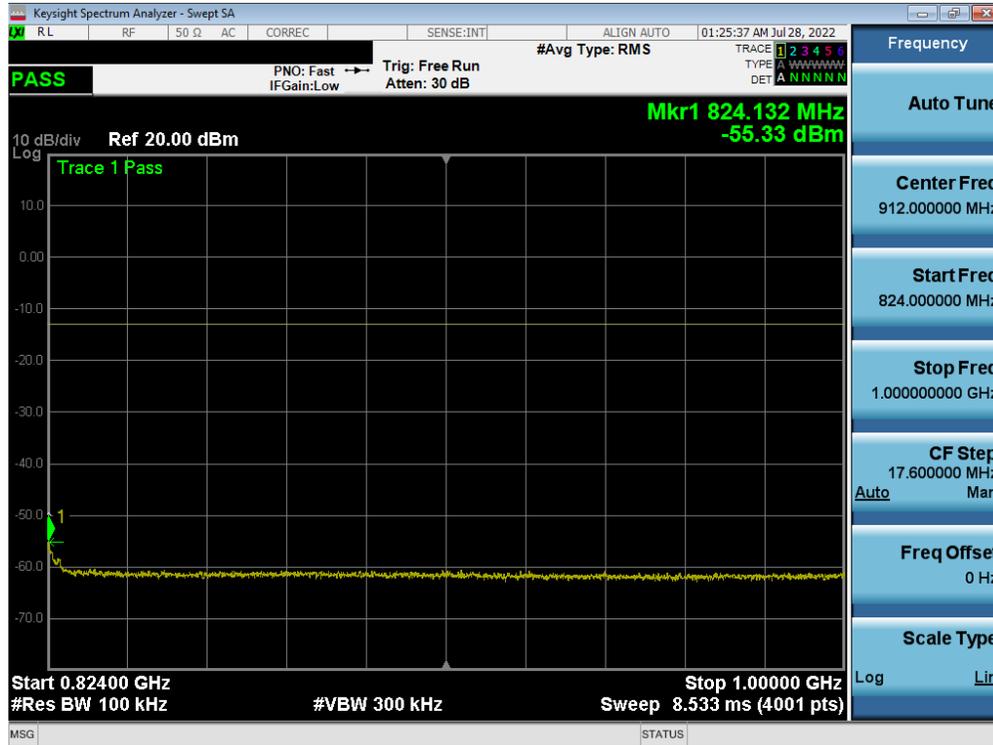


Plot 7-49. Conducted Spurious Plot (LTE Band 26 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

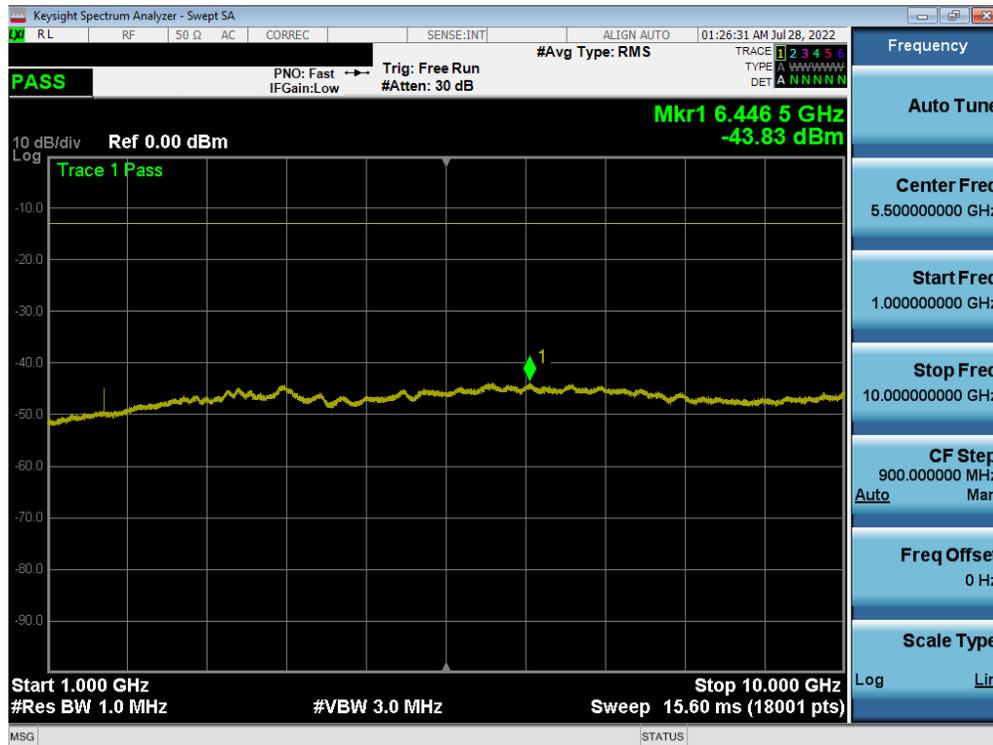


Plot 7-50. Conducted Spurious Plot (LTE Band 26 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 40 of 101		

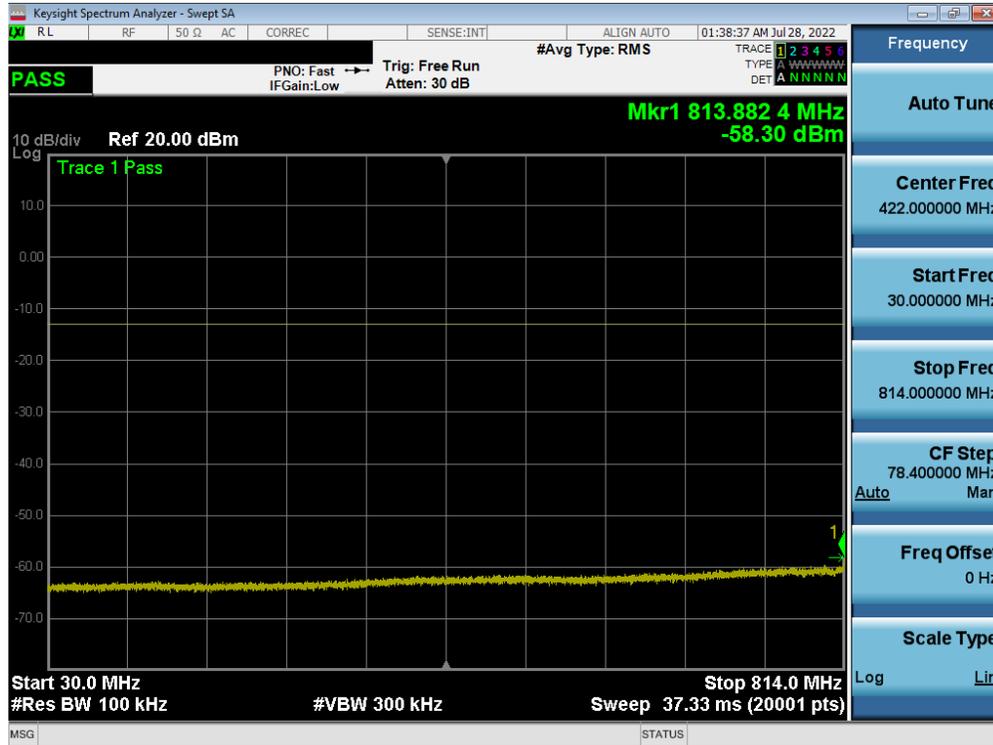


Plot 7-51. Conducted Spurious Plot (LTE Band 26 - 5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

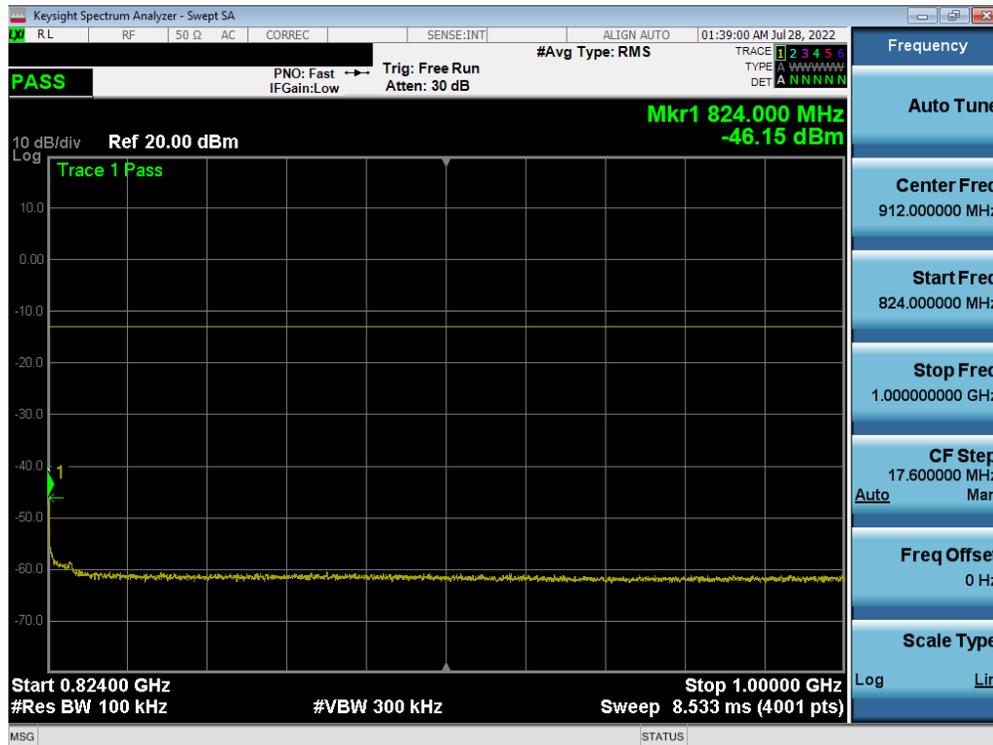


Plot 7-52. Conducted Spurious Plot (LTE Band 26 - 5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 41 of 101		

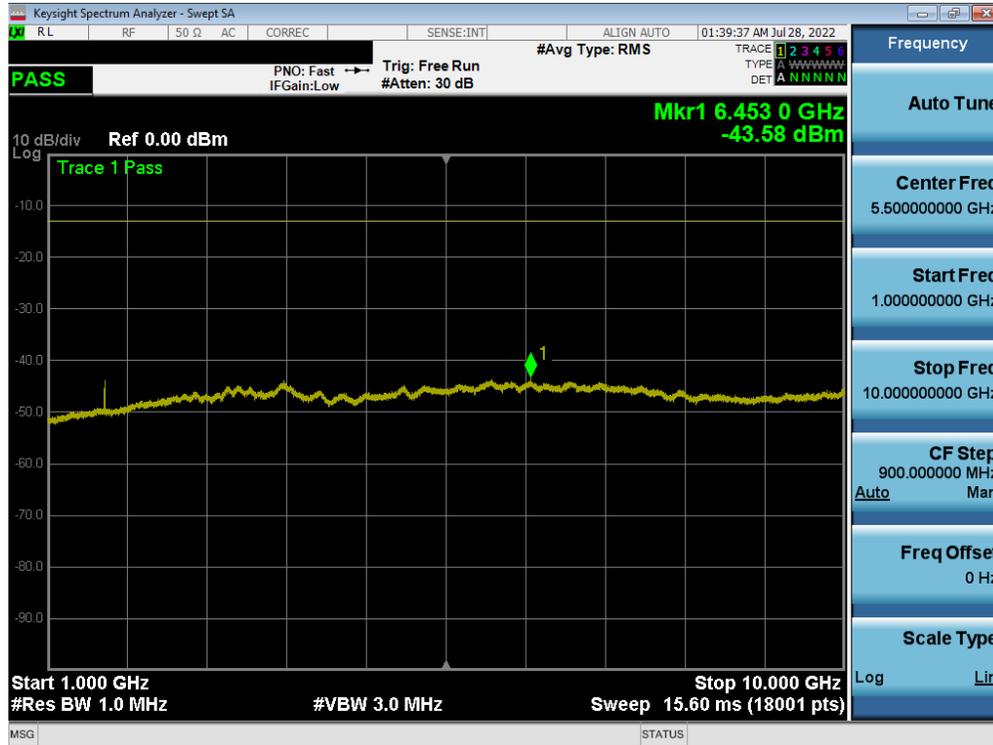


Plot 7-53. Conducted Spurious Plot (LTE Band 26 - 5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 42 of 101		

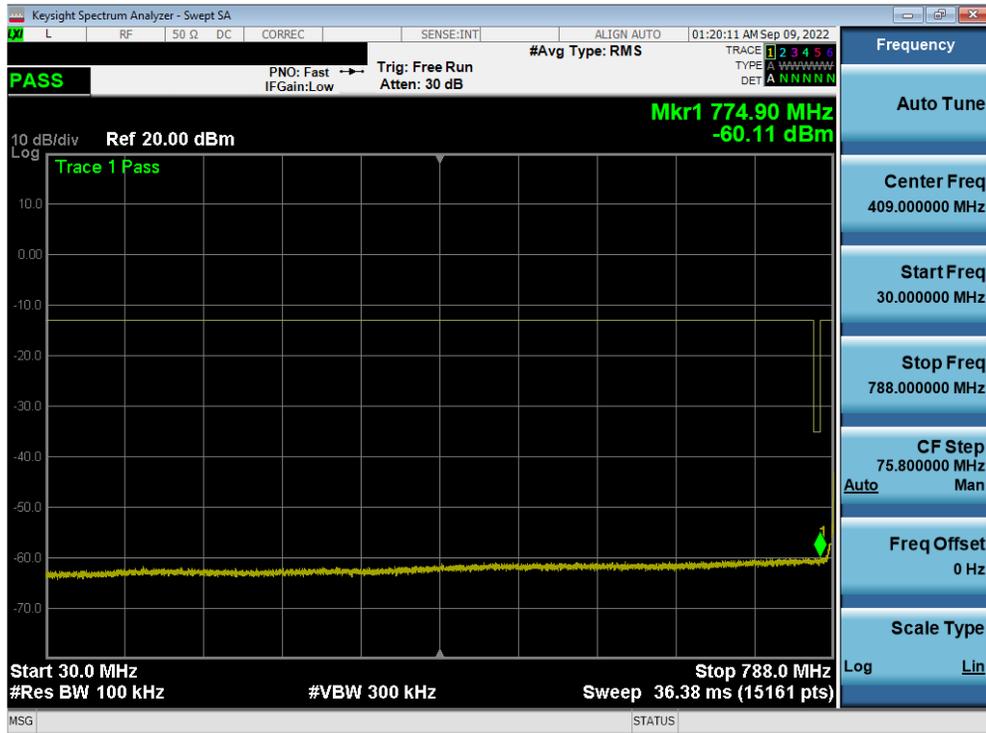


Plot 7-54. Conducted Spurious Plot (LTE Band 14 - 5MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

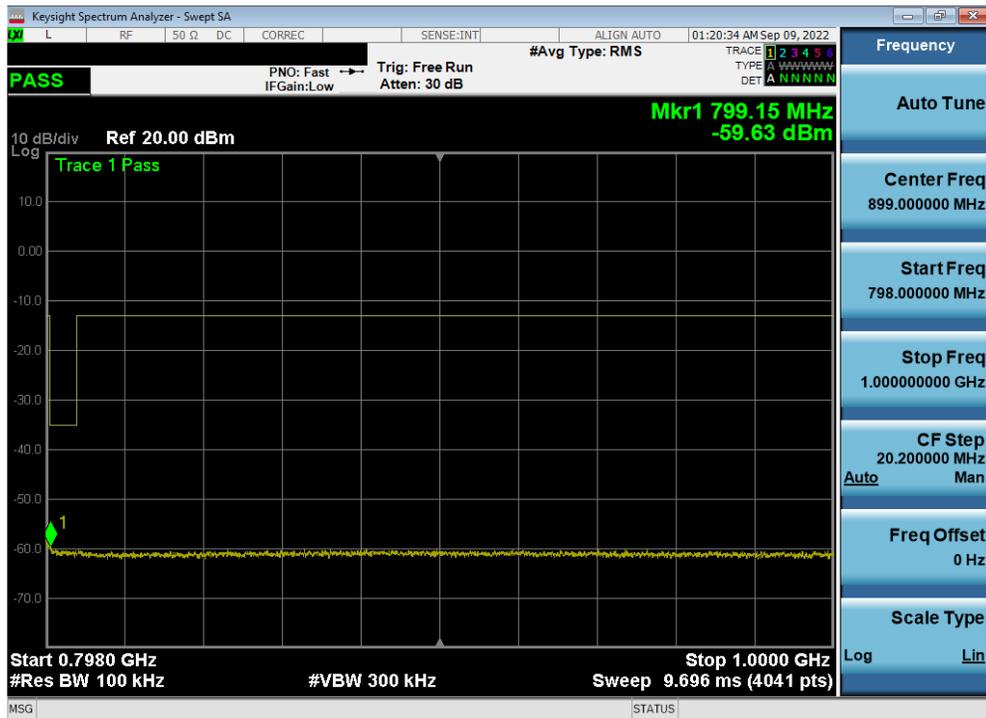


Plot 7-55. Conducted Spurious Plot (LTE Band 14 - 5MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
		Page 43 of 101

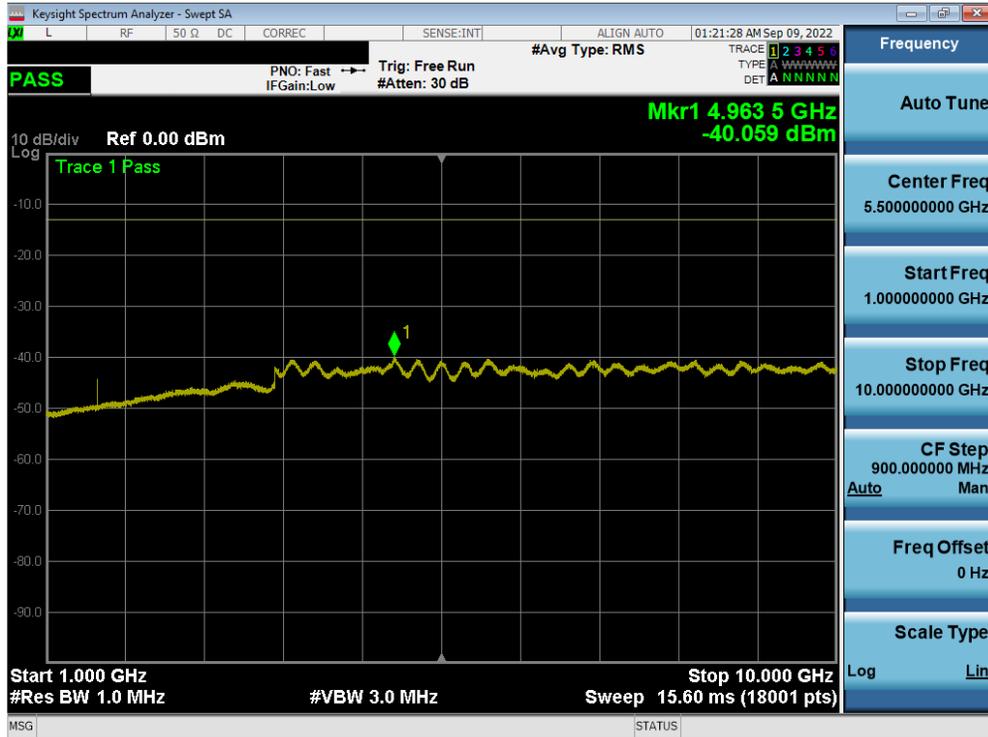


Plot 7-56. Conducted Spurious Plot (LTE Band 14 - 5MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

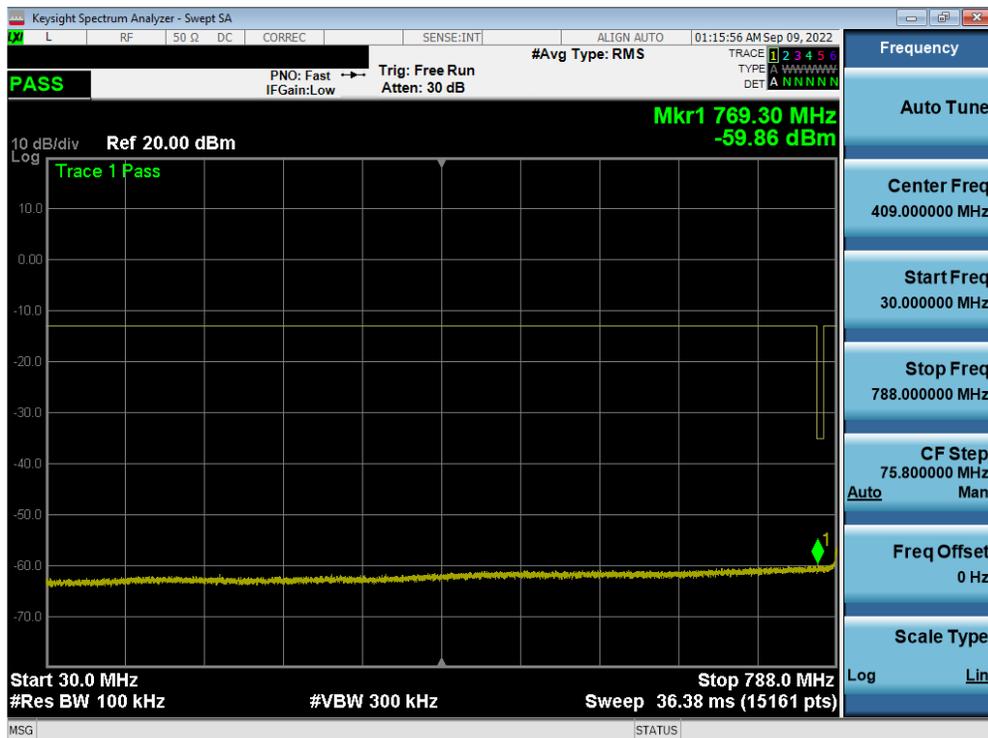


Plot 7-57. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
		Page 44 of 101

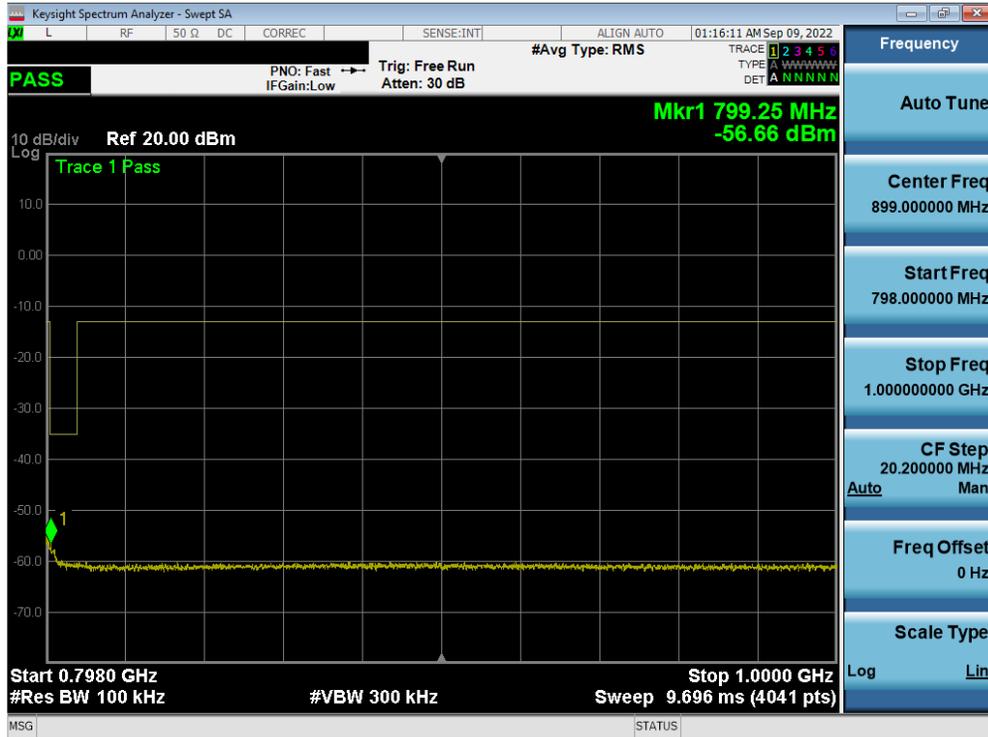


Plot 7-58. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0-Mid Channel)

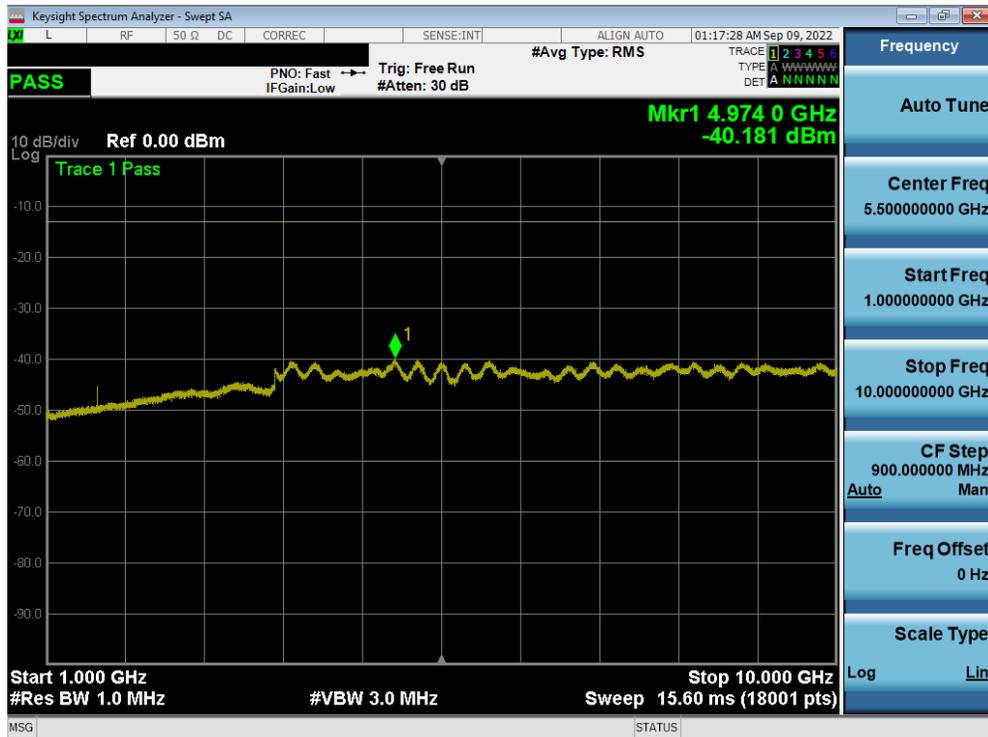


Plot 7-59. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 45 of 101		

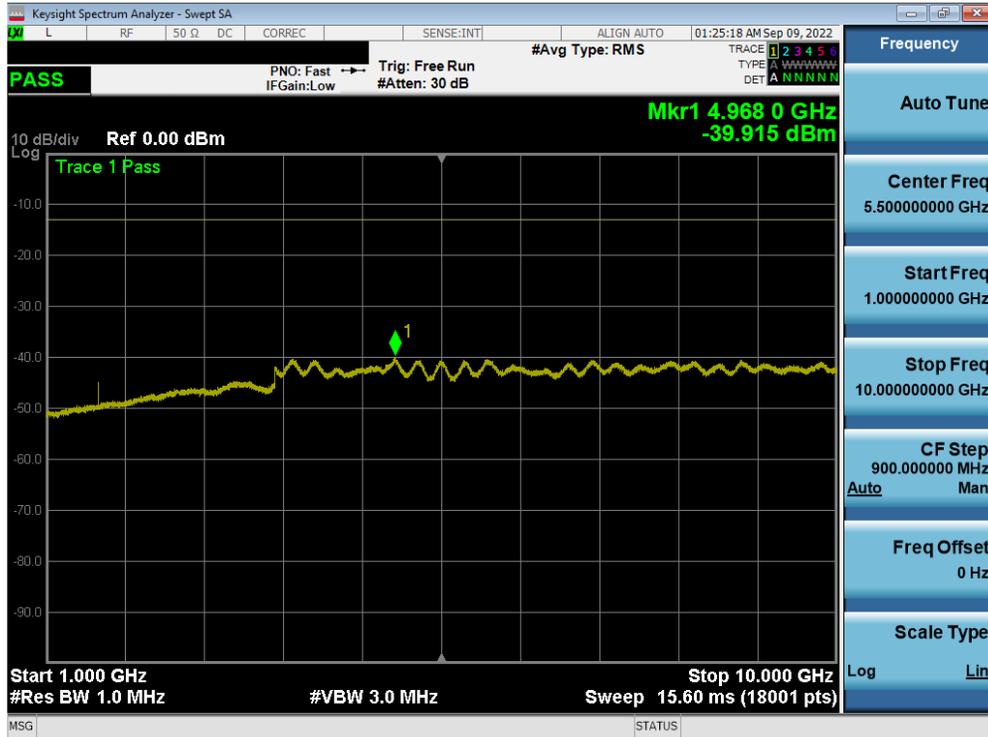


Plot 7-60. Conducted Spurious Plot (LTE Band 14 - 5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

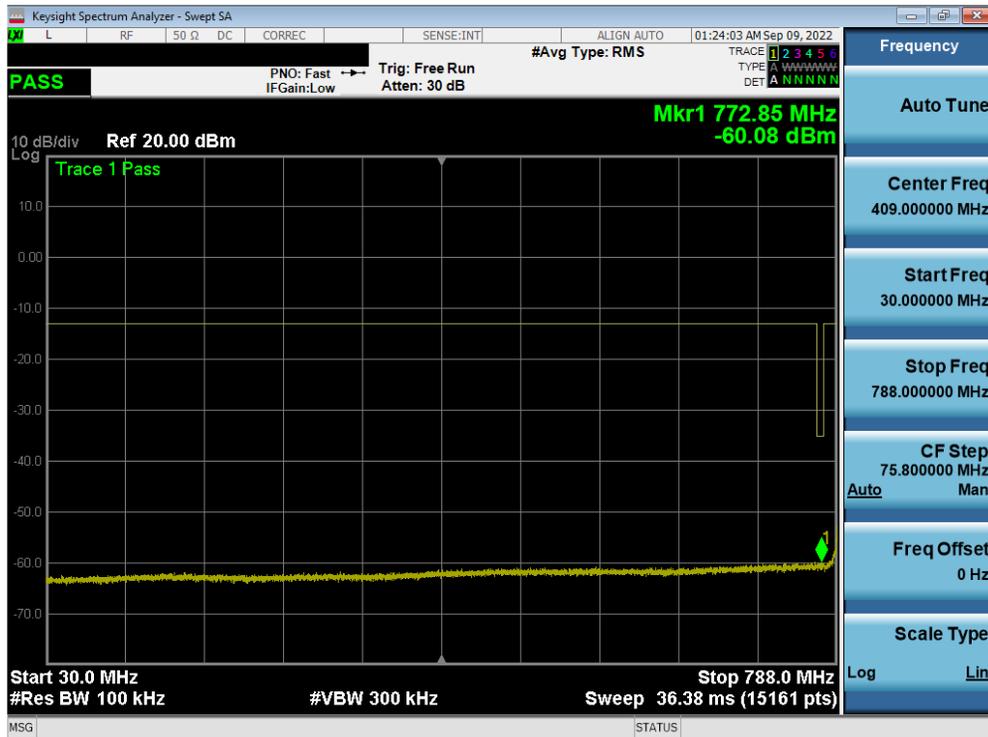

Plot 7-61. Conducted Spurious Plot (LTE Band 14 - 5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 46 of 101		

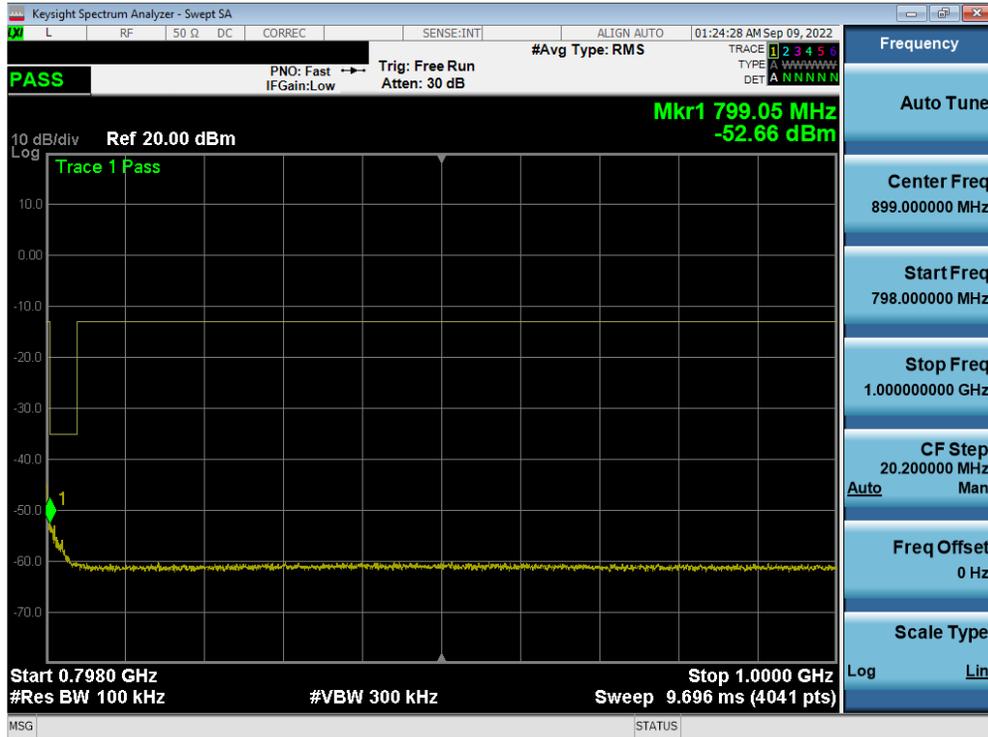


Plot 7-62. Conducted Spurious Plot (LTE Band 14 - 5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 47 of 101		

NR Band n14

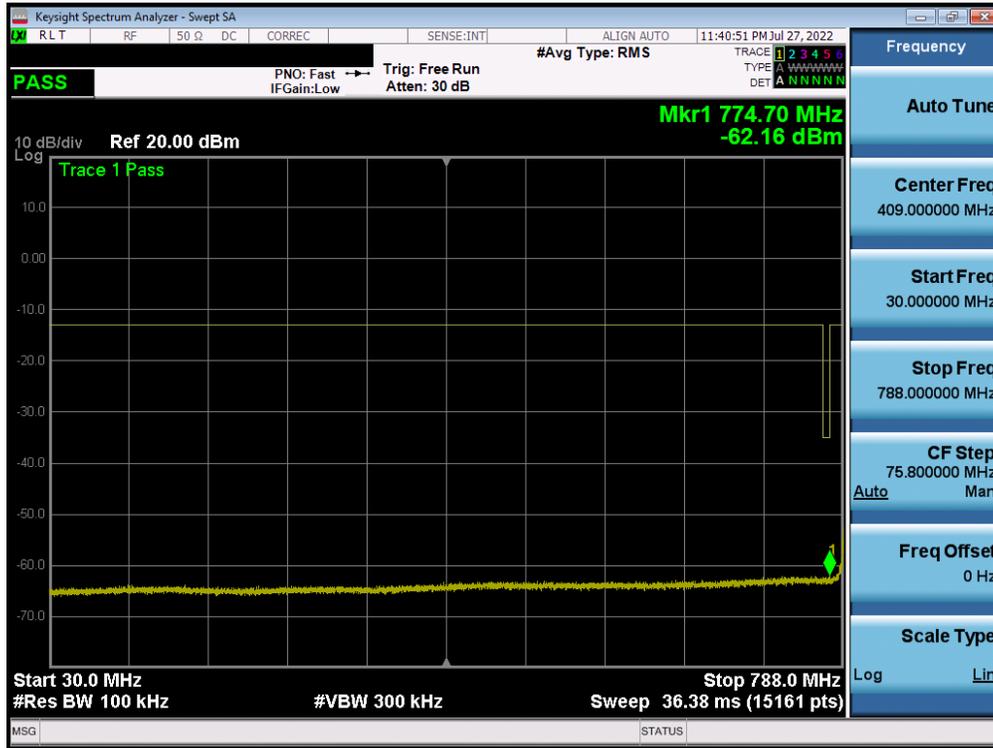


Plot 7-63. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

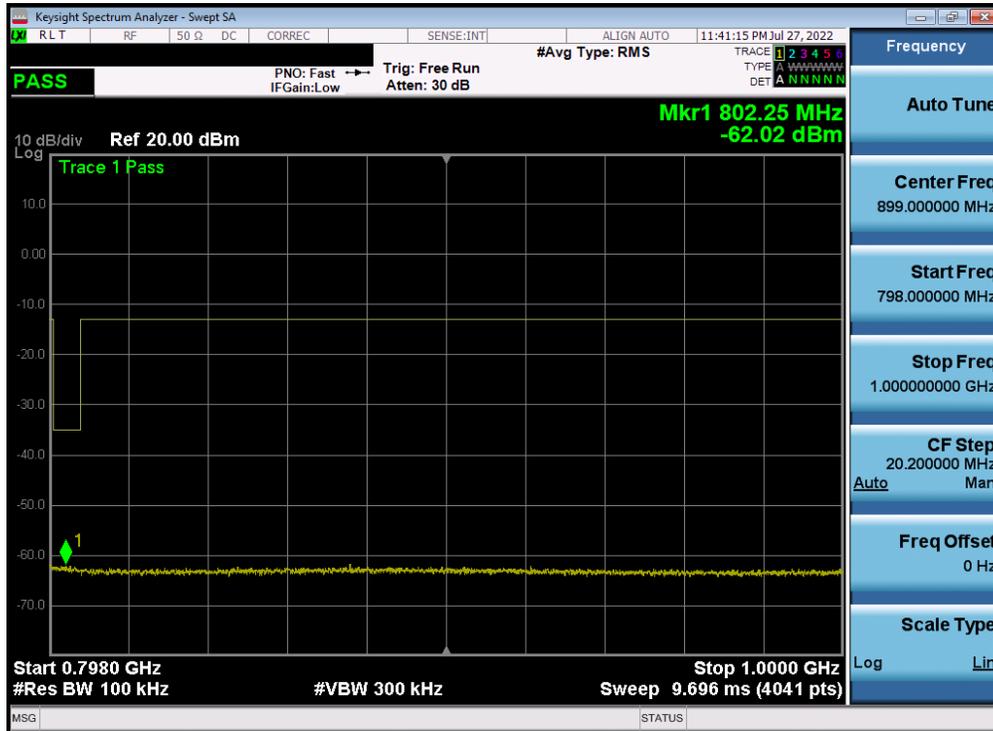


Plot 7-64. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 48 of 101		

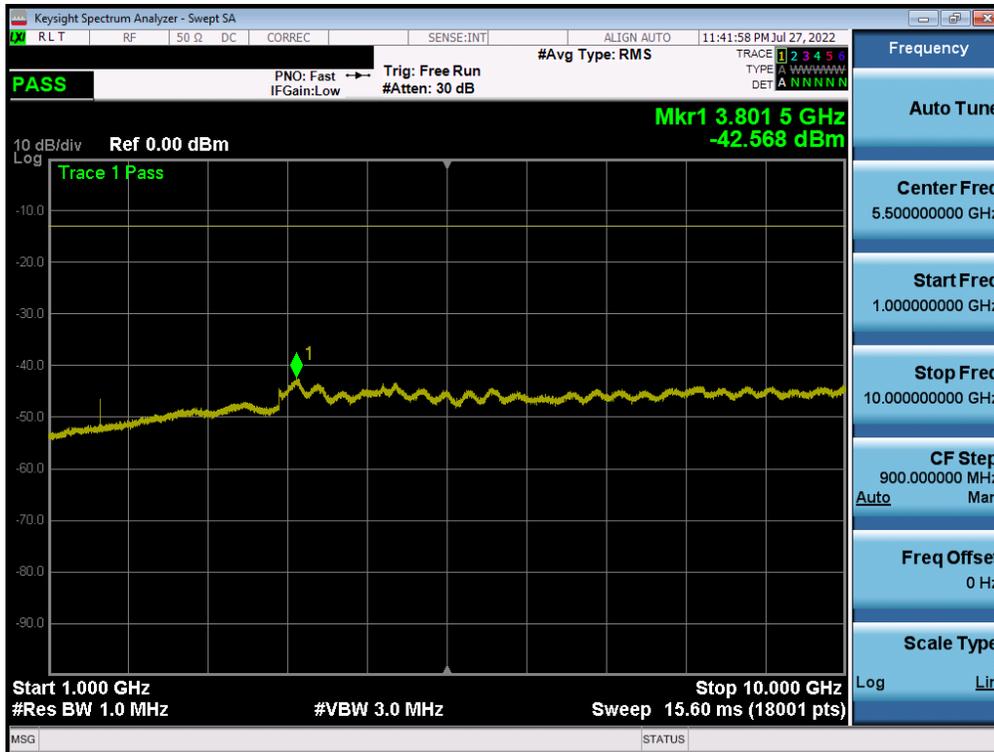


Plot 7-65. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

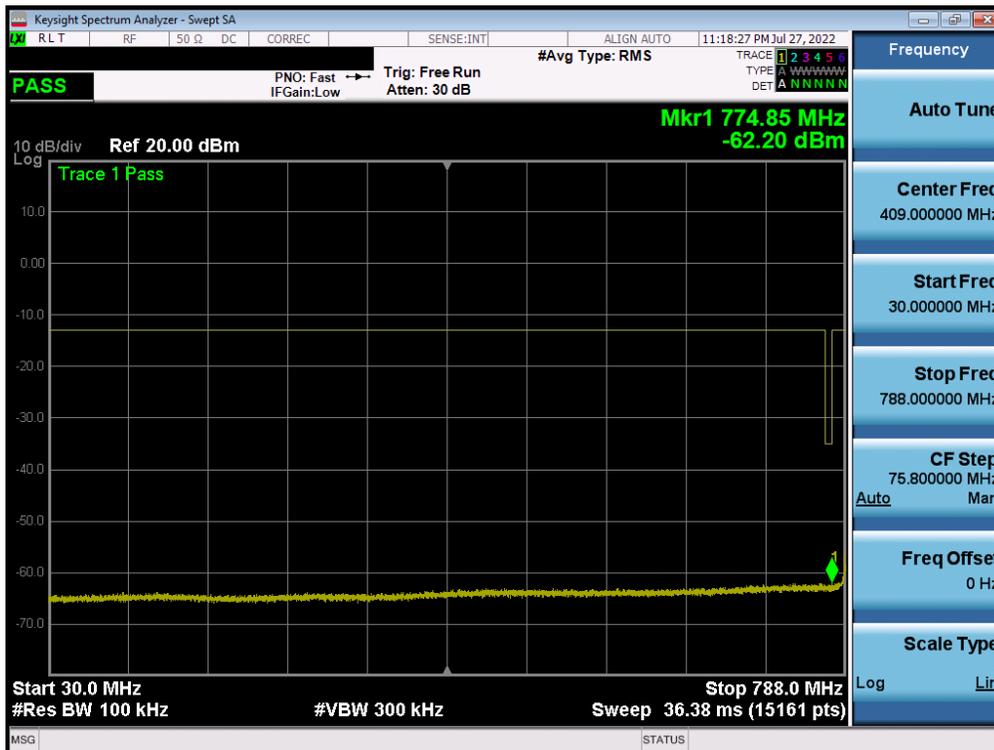


Plot 7-66. Conducted Spurious Plot (NR Band n14 - 10MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 49 of 101		

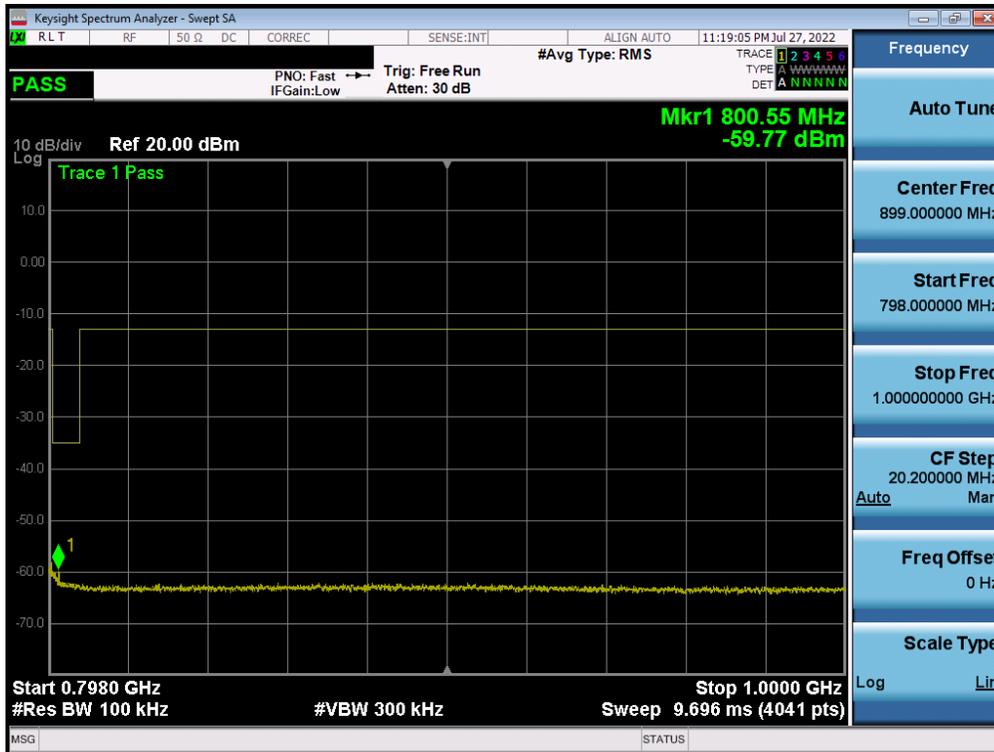


Plot 7-67. Conducted Spurious Plot (NR Band n14 - 10MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 -Mid Channel)

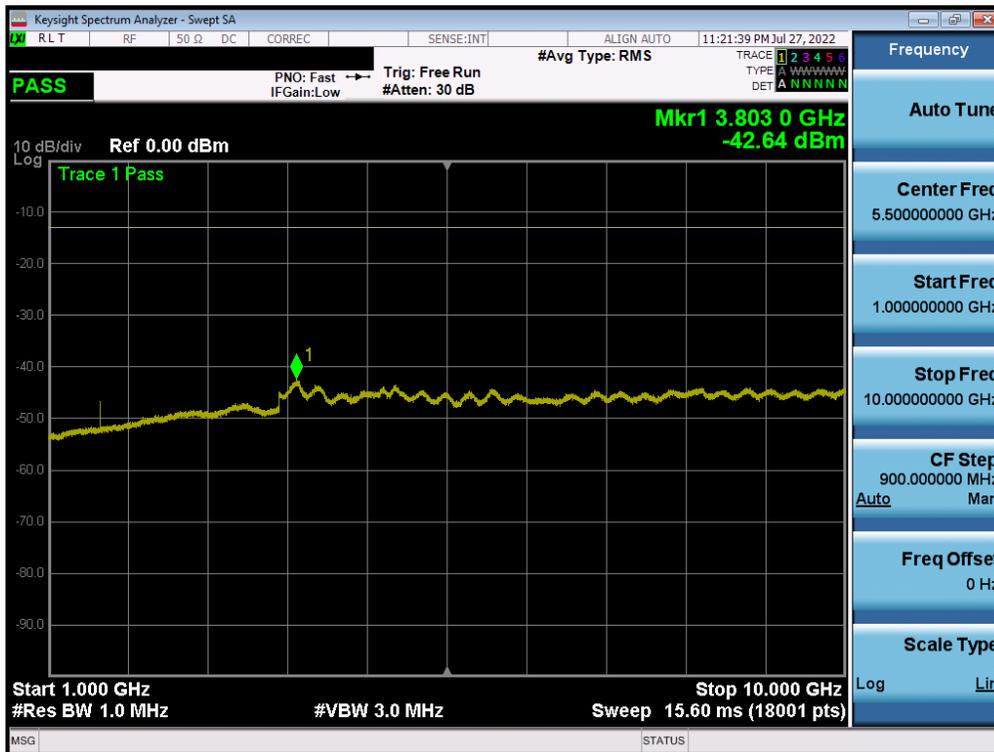


Plot 7-68. Conducted Spurious Plot (NR Band n14 - 10MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 -Mid Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 50 of 101		

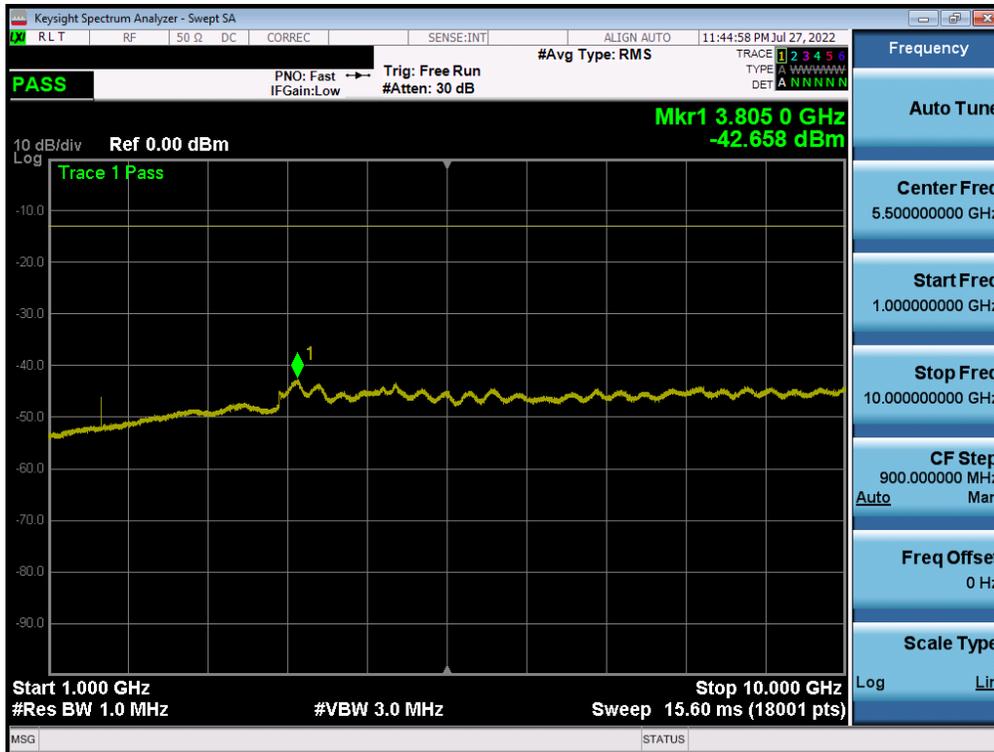


Plot 7-69. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

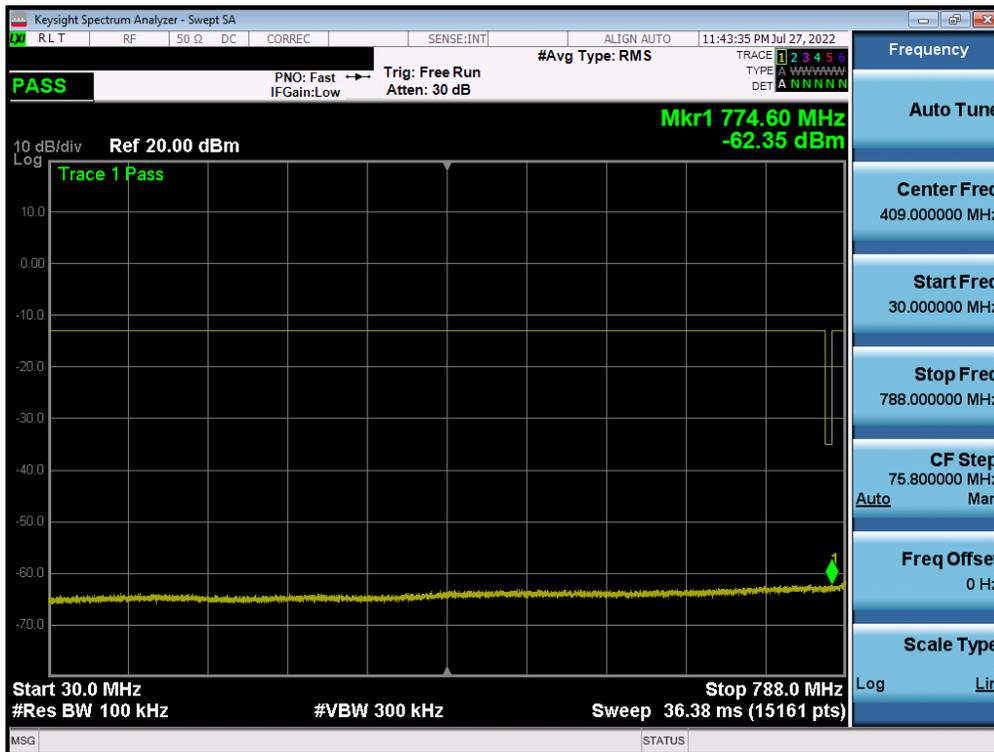

Plot 7-70. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 51 of 101		

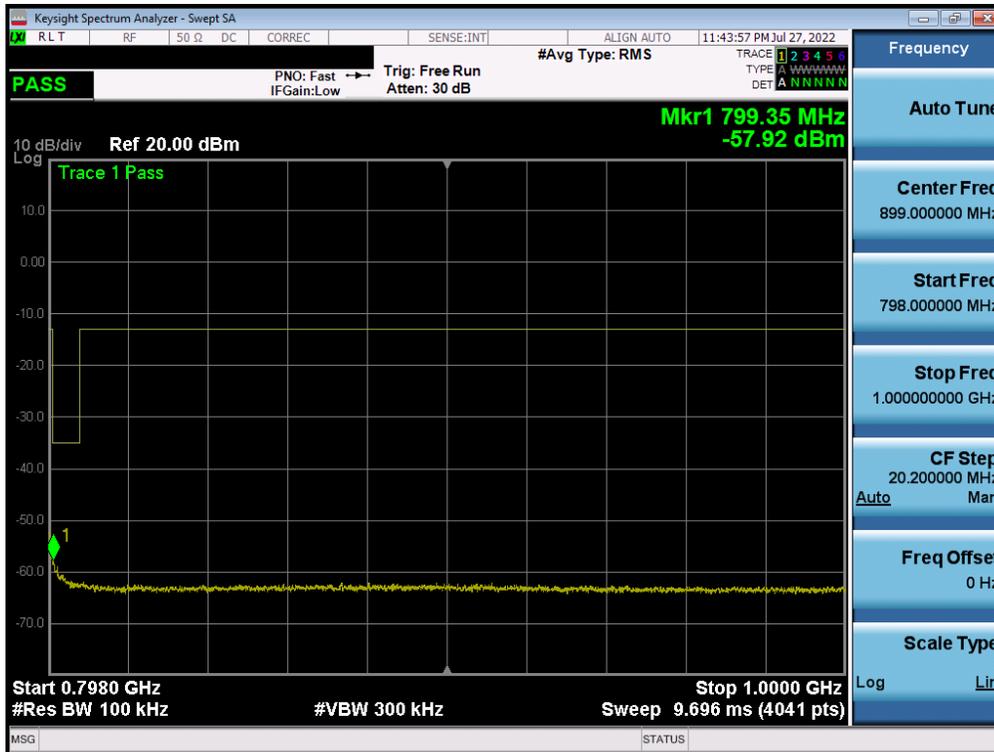


Plot 7-71. Conducted Spurious Plot (NR Band n14 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 52 of 101		

NR Band n26




Plot 7-72. Conducted Spurious Plot (NR Band n26 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

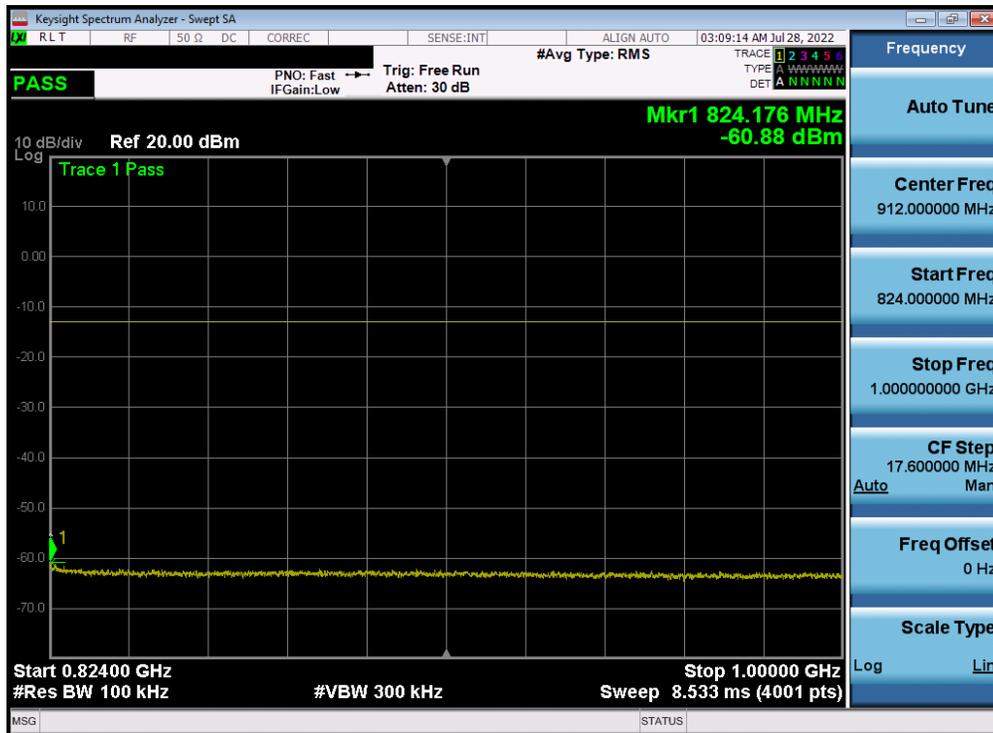


Plot 7-73. Conducted Spurious Plot (NR Band n26 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 53 of 101		

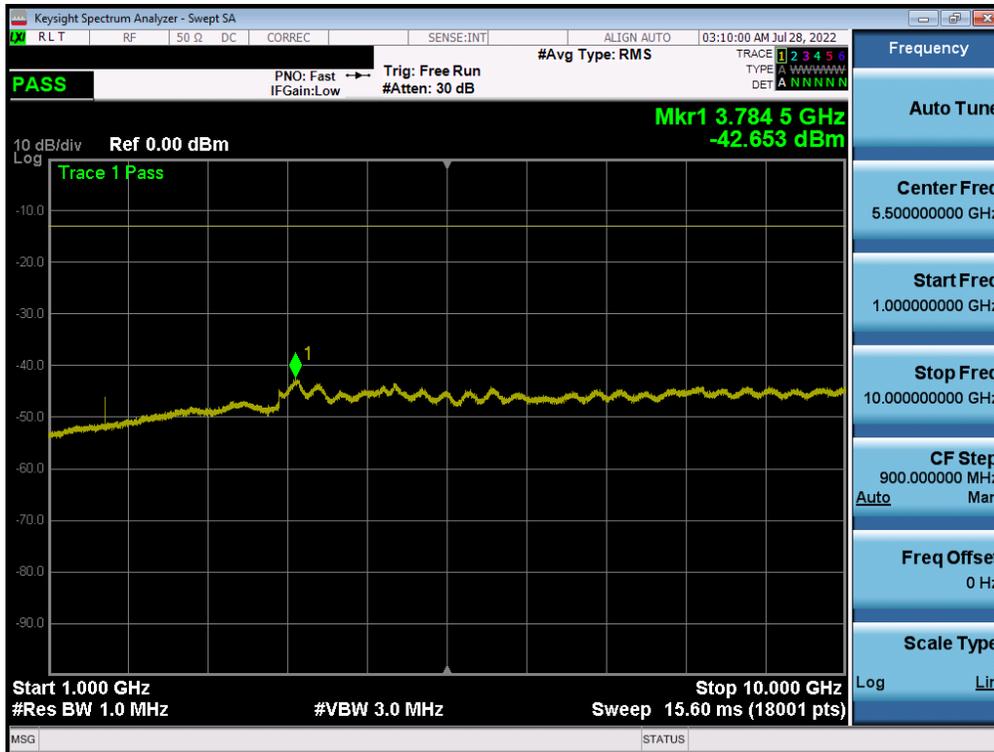

Plot 7-74. Conducted Spurious Plot (NR Band n26 - 5MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

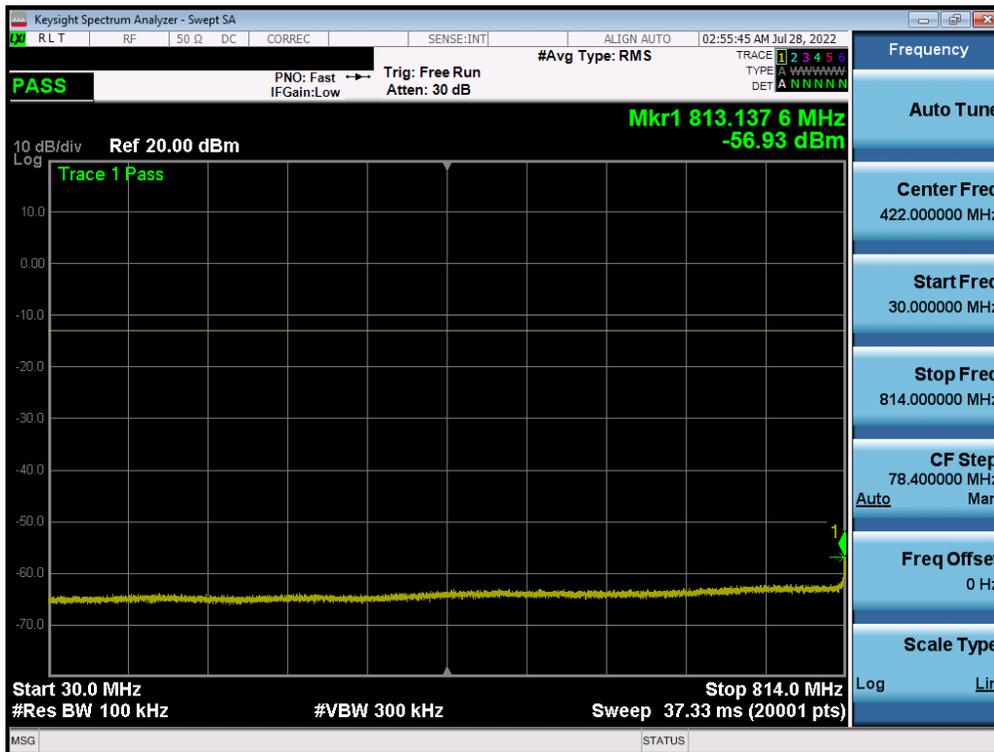

Plot 7-75. Conducted Spurious Plot (NR Band n26 - 10MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2435	PART 90 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-09.BCG	Test Dates: 05/30/2022 - 09/09/2022	EUT Type: Tablet Device
Page 54 of 101		