


Plot 7-700. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 97 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-85.11	18.82	40.71	68.20	-27.49

Table 7-79. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 211 of 324

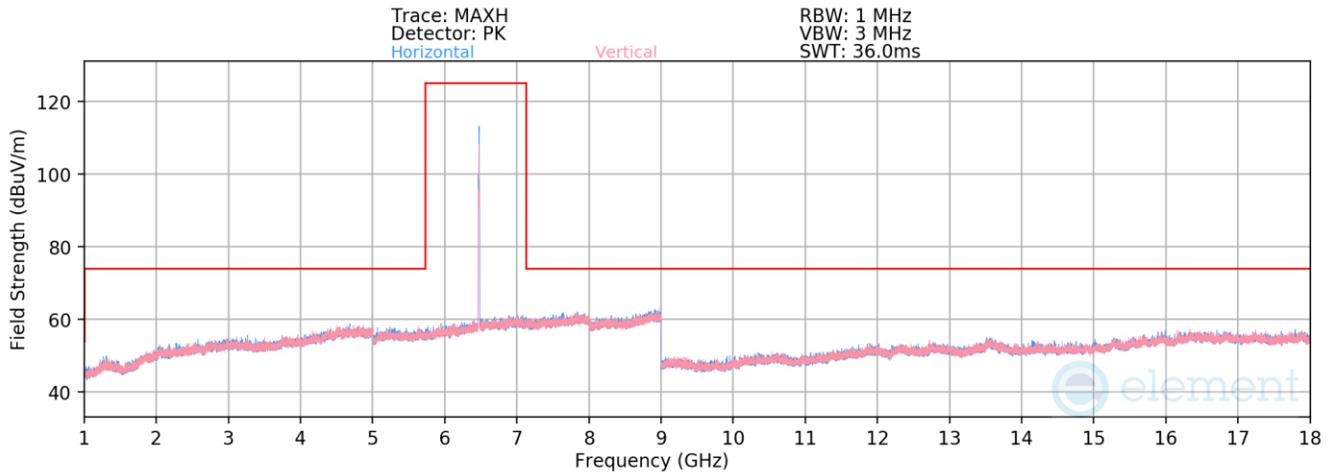


Plot 7-701. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 105 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	102	169	-81.62	18.24	43.62	68.20	-24.58

Table 7-80. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 212 of 324

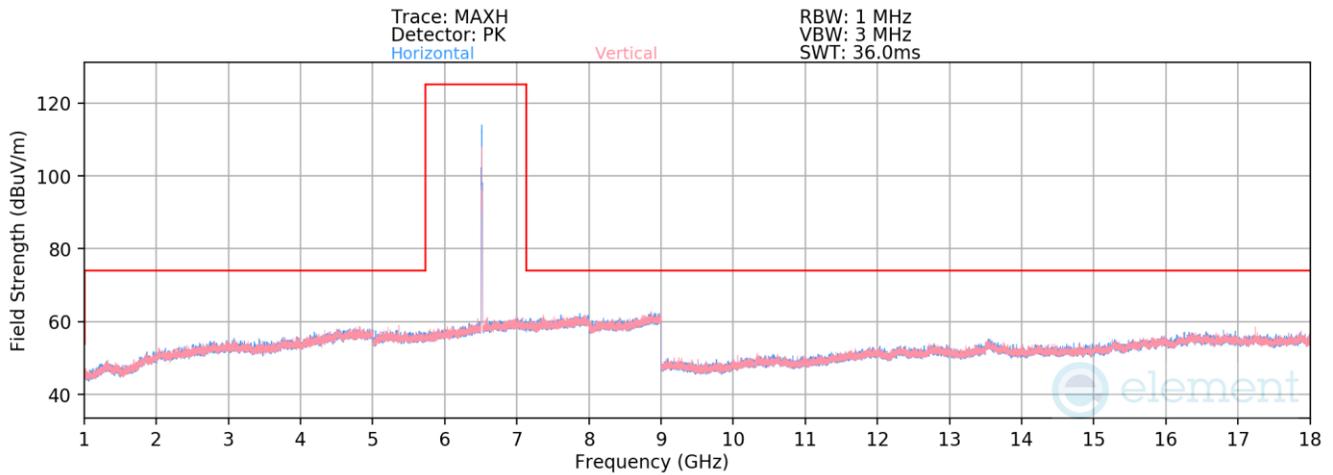


Plot 7-702. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 113 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-79.15	18.13	45.98	68.20	-22.22

Table 7-81. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 213 of 324

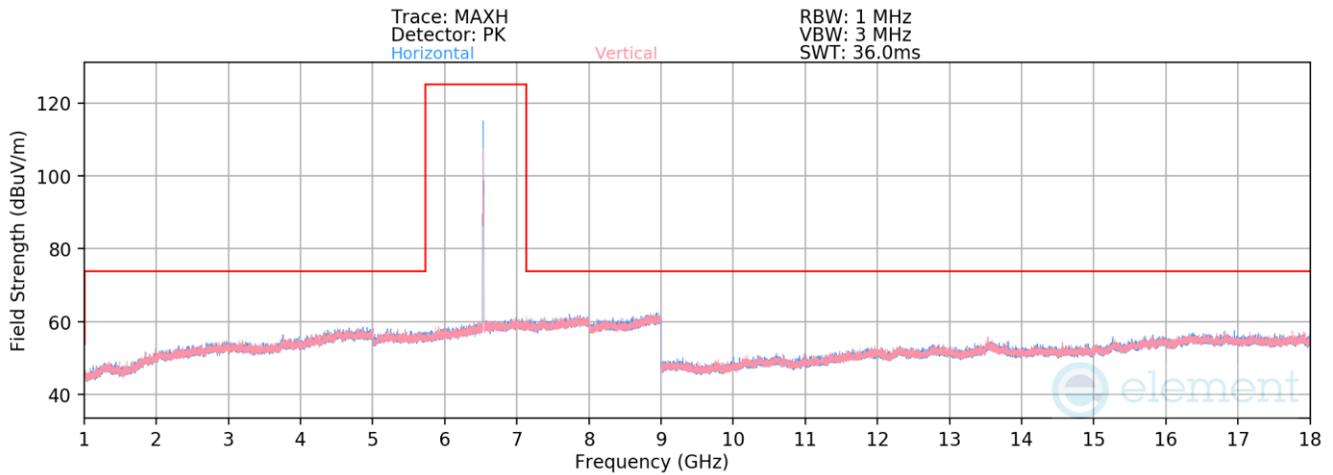


Plot 7-703. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 117 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	105	161	-77.88	18.51	47.63	68.20	-20.57

Table 7-82. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 214 of 324

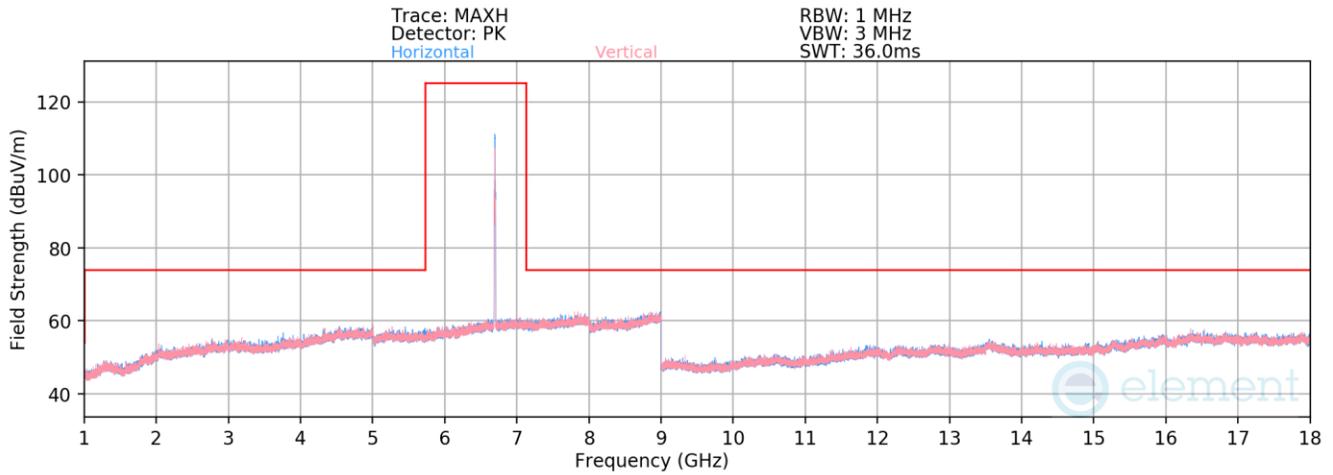


Plot 7-704. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 149 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.66	18.12	52.46	73.98	-21.52
* 13390.00	Average	H	-	-	-83.88	18.12	41.24	53.98	-12.74

Table 7-83. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 215 of 324

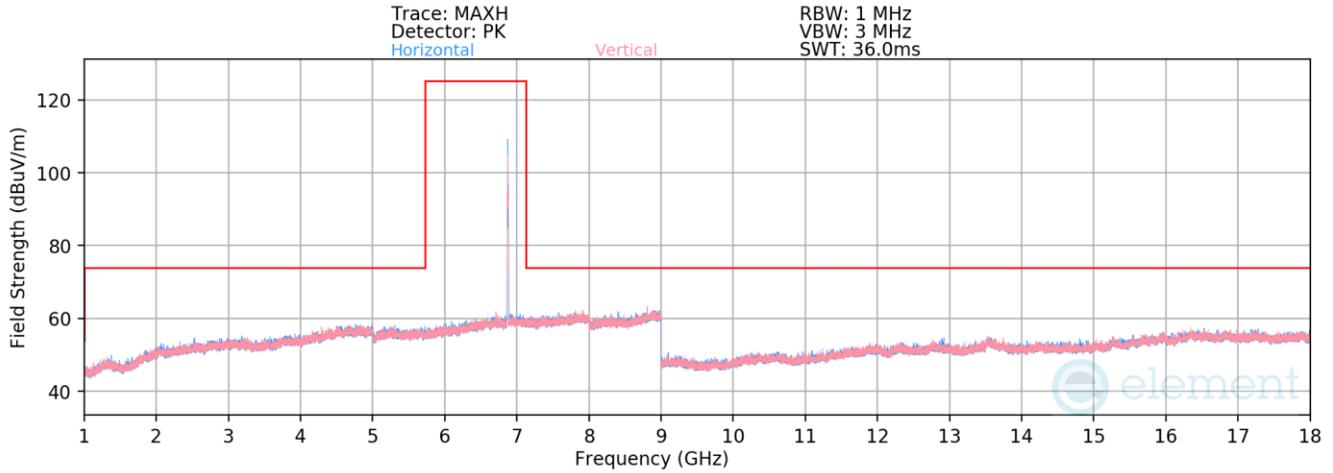


Plot 7-705. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 185 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	101	161	-75.46	17.84	49.38	68.20	-18.82

Table 7-84. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 216 of 324

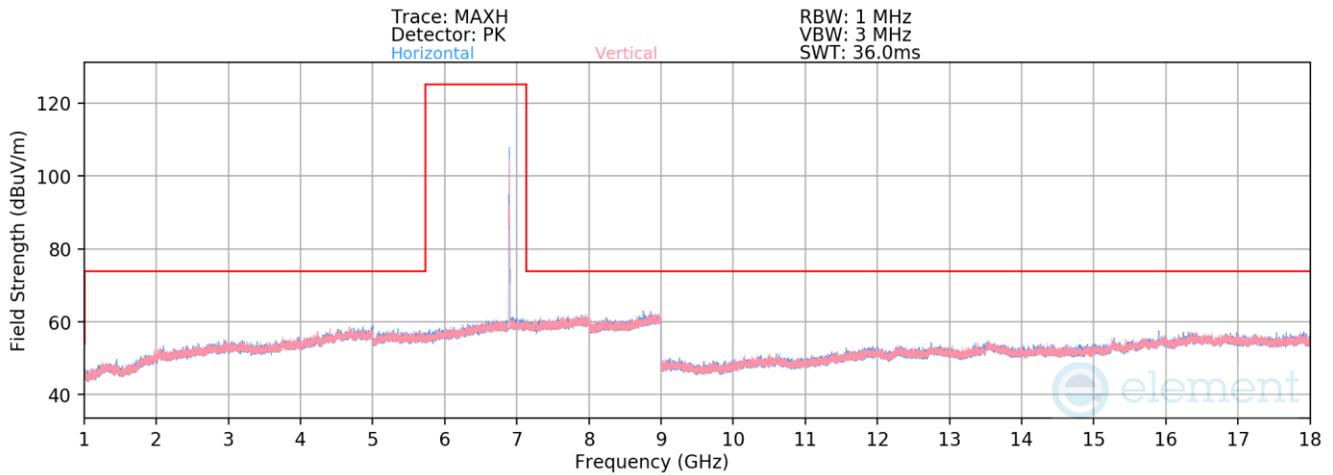


Plot 7-706. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 189 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	101	157	-76.27	17.74	48.47	68.20	-19.73

Table 7-85. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 217 of 324

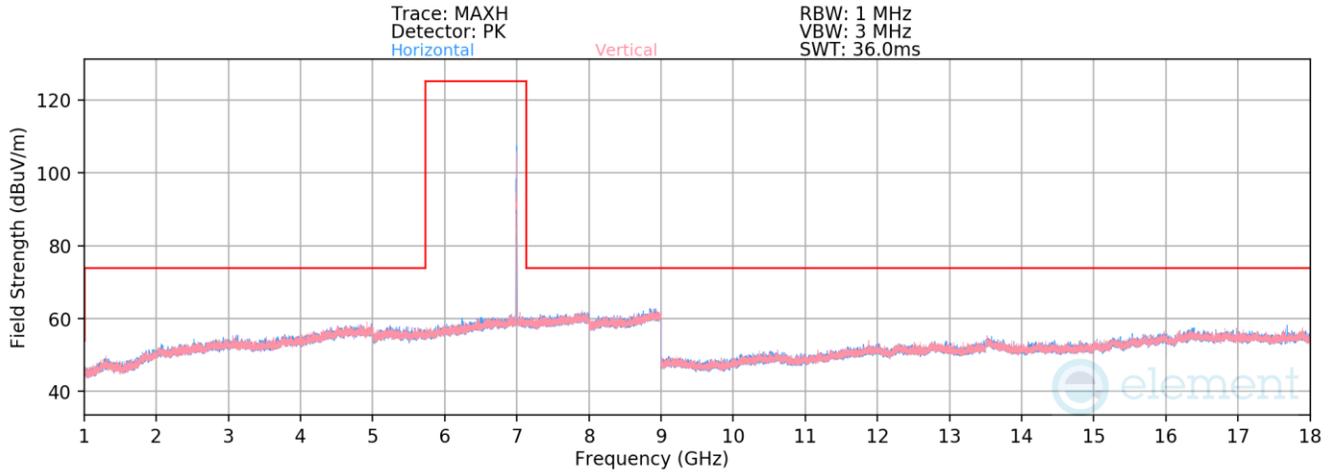


Plot 7-707. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 209 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	101	164	-77.43	17.91	47.48	68.20	-20.72

Table 7-86. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 218 of 324

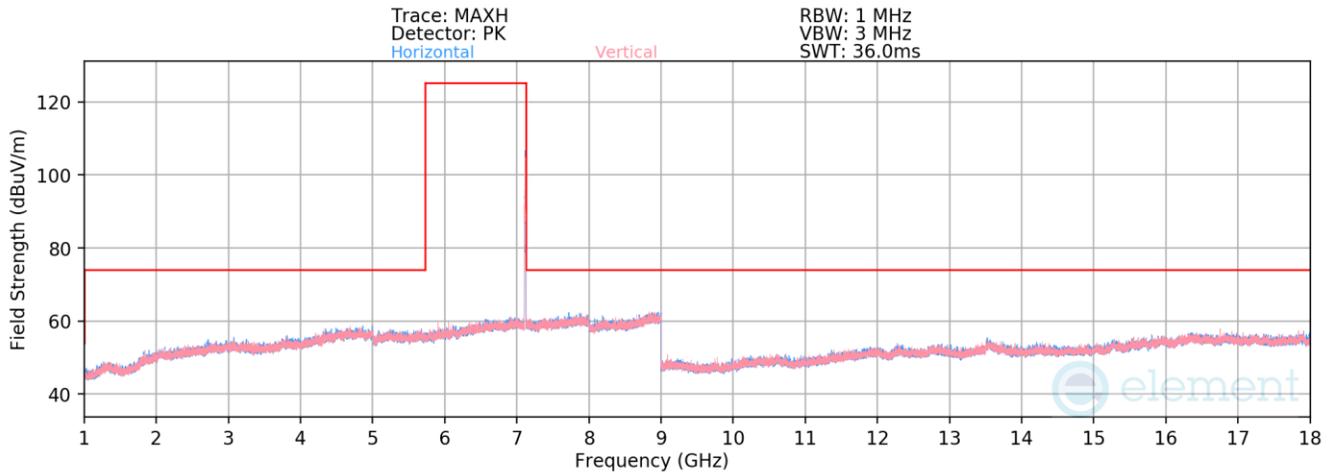

Plot 7-708. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 229 – RU26)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.83	18.14	41.31	68.20	-26.89

Table 7-87. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 219 of 324

RU242

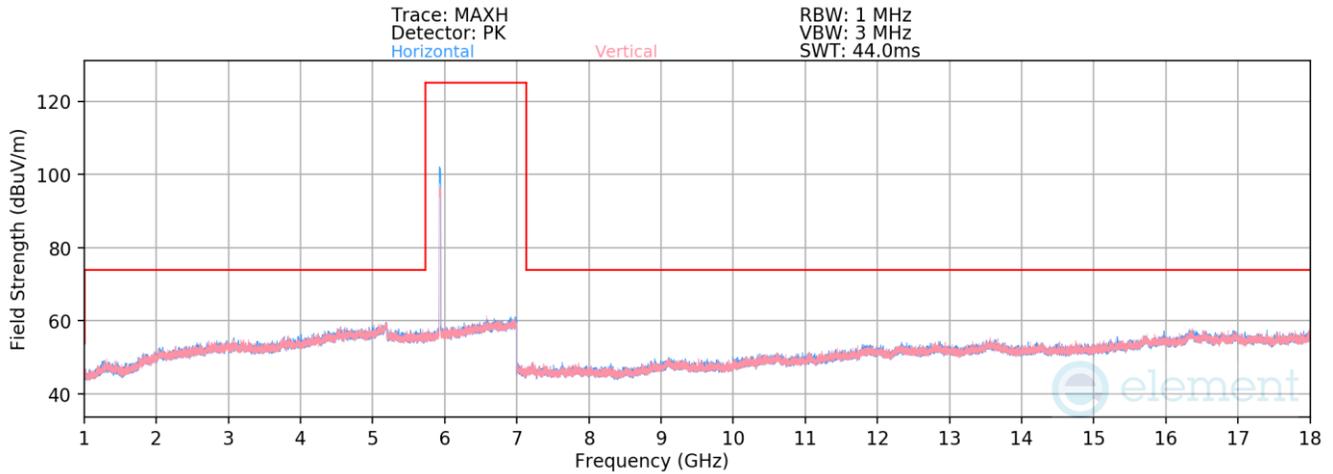


Plot 7-709. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 1 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11870.00	Peak	H	-	-	-72.61	16.96	51.35	73.98	-22.63
* 11870.00	Average	H	-	-	-83.47	16.96	40.49	53.98	-13.49
* 17805.00	Peak	H	-	-	-72.86	21.89	56.03	73.98	-17.95
* 17805.00	Average	H	-	-	-84.29	21.89	44.60	53.98	-9.38

Table 7-88. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 220 of 324

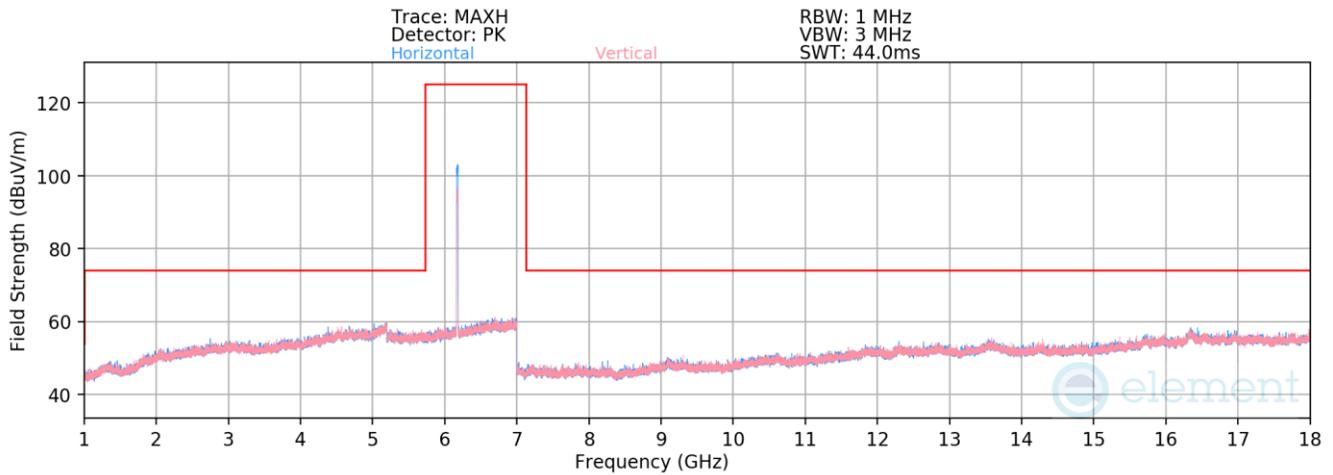


Plot 7-710. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 45 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Peak	H	-	-	-72.70	17.83	52.13	73.98	-21.85
* 12350.00	Average	H	-	-	-84.26	17.83	40.57	53.98	-13.41

Table 7-89. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 221 of 324

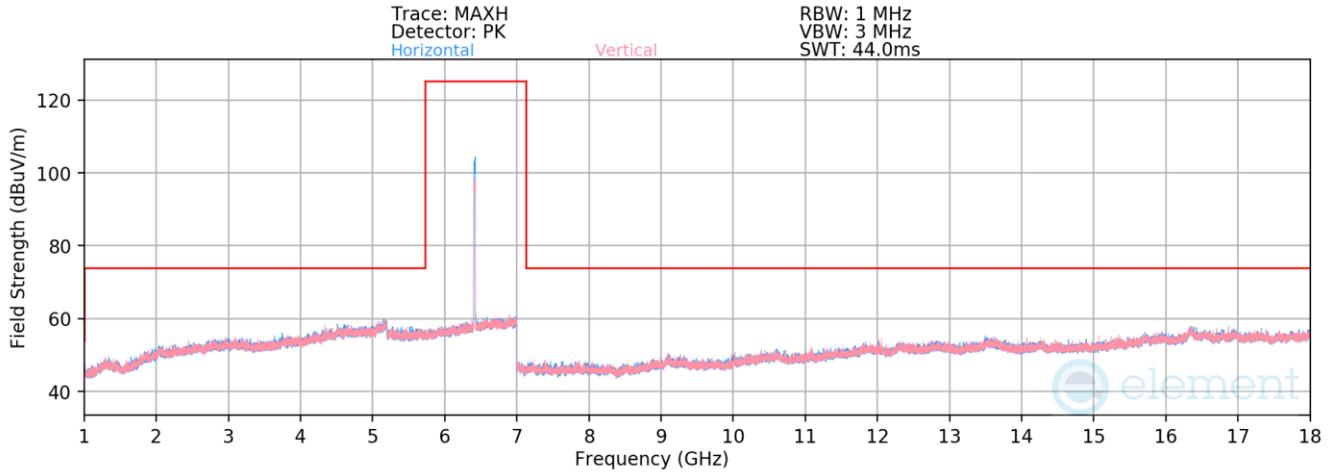


Plot 7-711. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 93 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.29	18.55	41.26	68.20	-26.94

Table 7-90. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 222 of 324

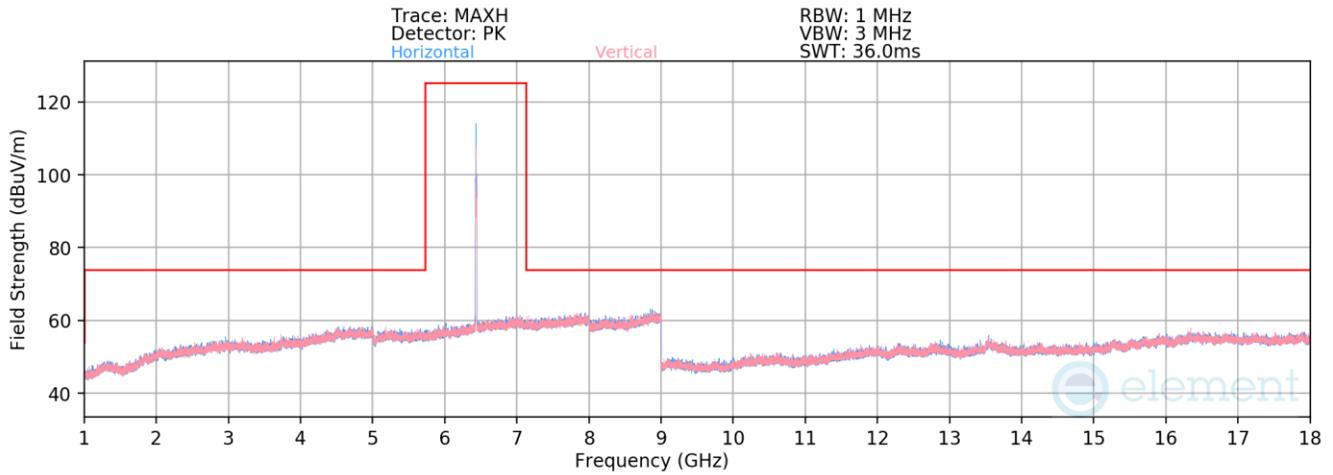


Plot 7-712. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 97 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.23	18.68	41.45	68.20	-26.75

Table 7-91. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 223 of 324

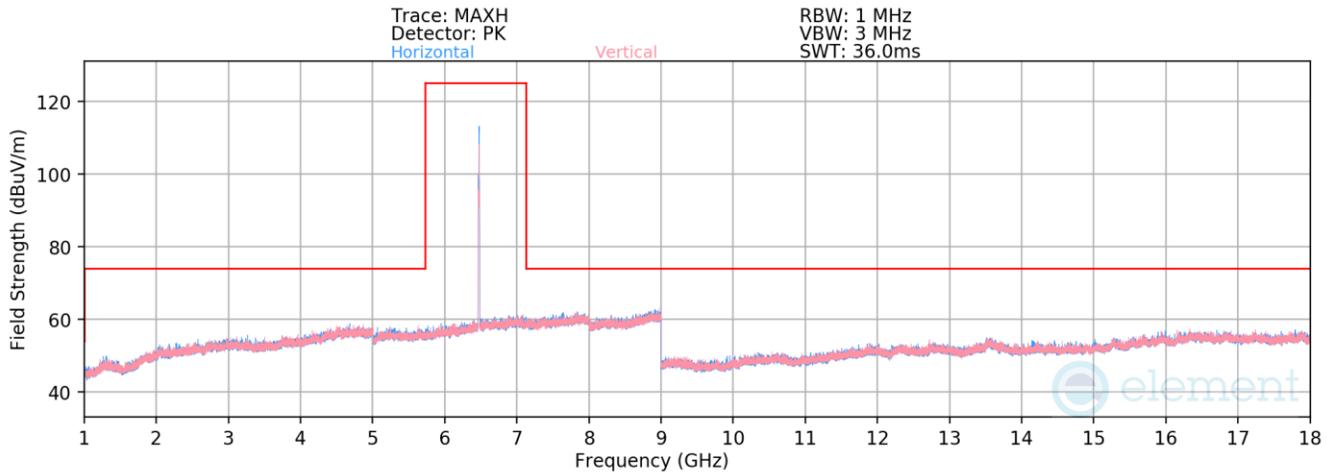


Plot 7-713. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 105 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-83.48	18.16	41.68	68.20	-26.52

Table 7-92. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 224 of 324

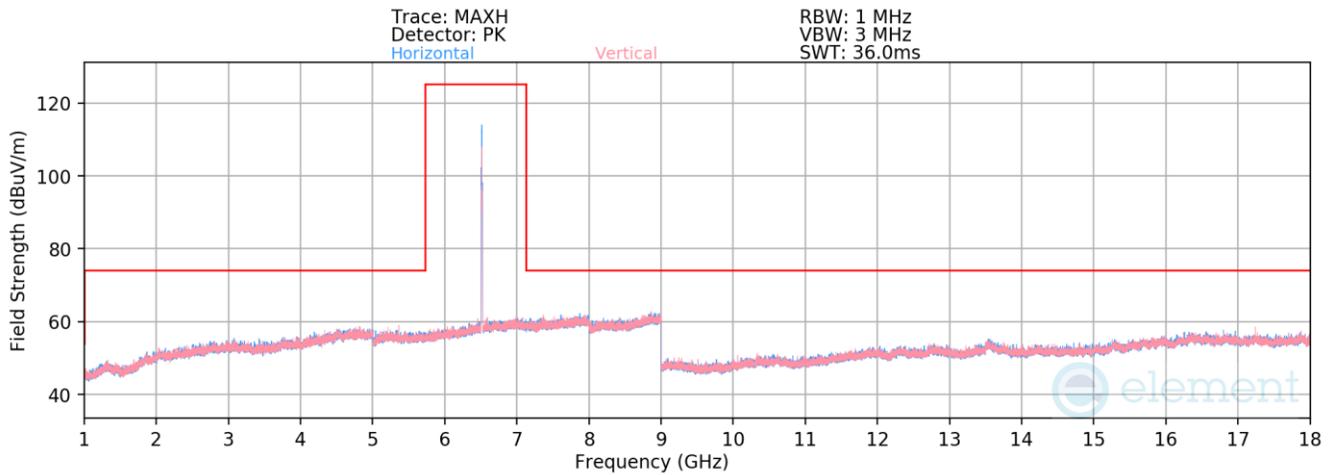


Plot 7-714. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 113 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-83.72	18.52	41.80	68.20	-26.40

Table 7-93. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 225 of 324

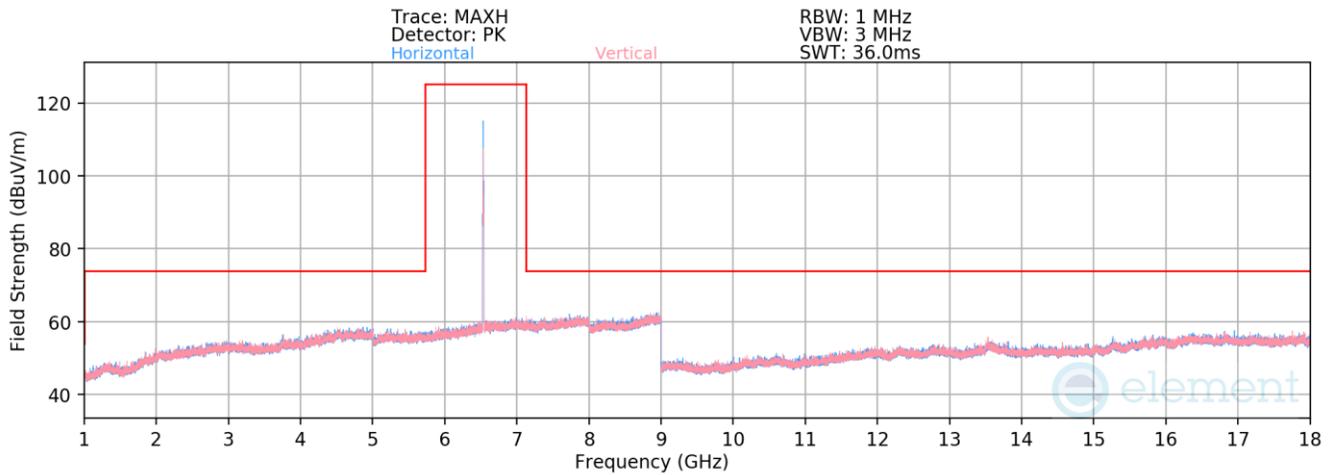


Plot 7-715. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 117 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.65	18.31	41.66	68.20	-26.54

Table 7-94. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 226 of 324

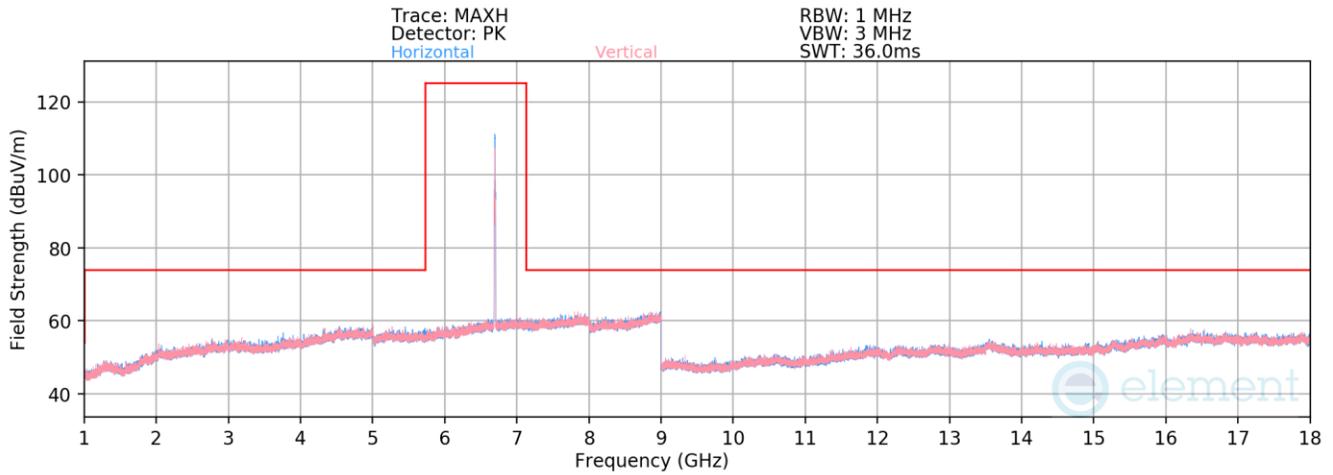


Plot 7-716. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 149 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.54	18.01	52.47	73.98	-21.51
* 13390.00	Average	H	-	-	-84.02	18.01	40.99	53.98	-12.99

Table 7-95. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 227 of 324

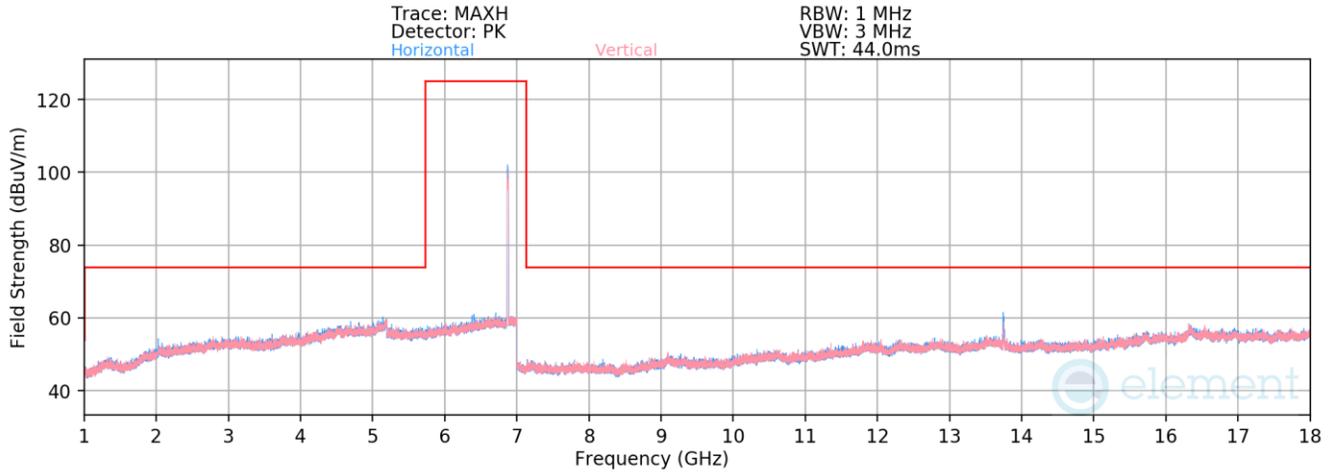


Plot 7-717. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 185 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
13750.00	Average	H	-	-	-83.19	17.84	41.65	68.20	-26.55

Table 7-96. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 228 of 324

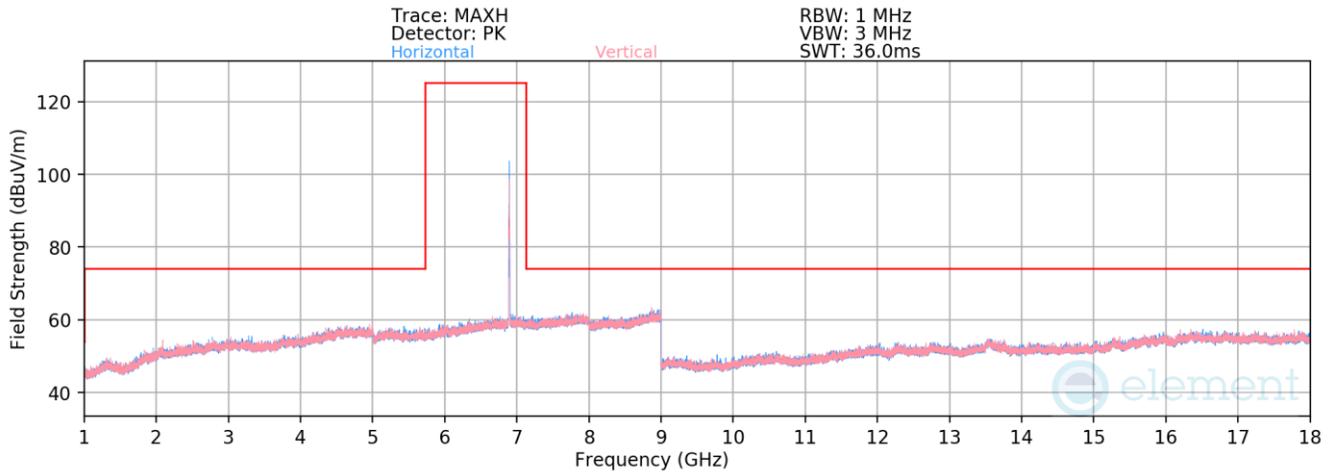


Plot 7-718. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 189 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.00	17.84	41.84	68.20	-26.36

Table 7-97. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 229 of 324

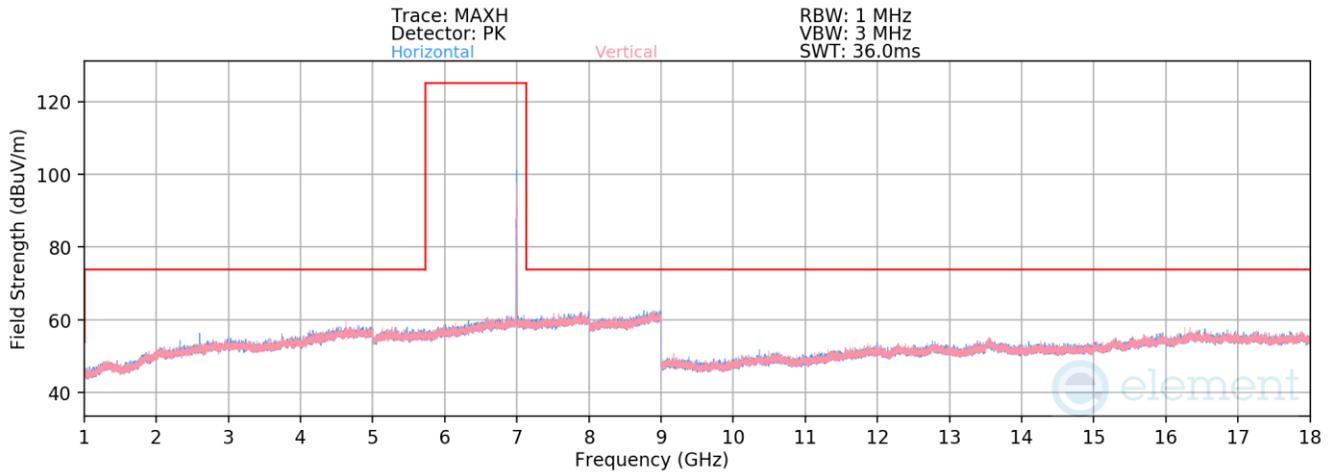


Plot 7-719. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 209 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-83.57	17.91	41.34	68.20	-26.86

Table 7-98. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 230 of 324

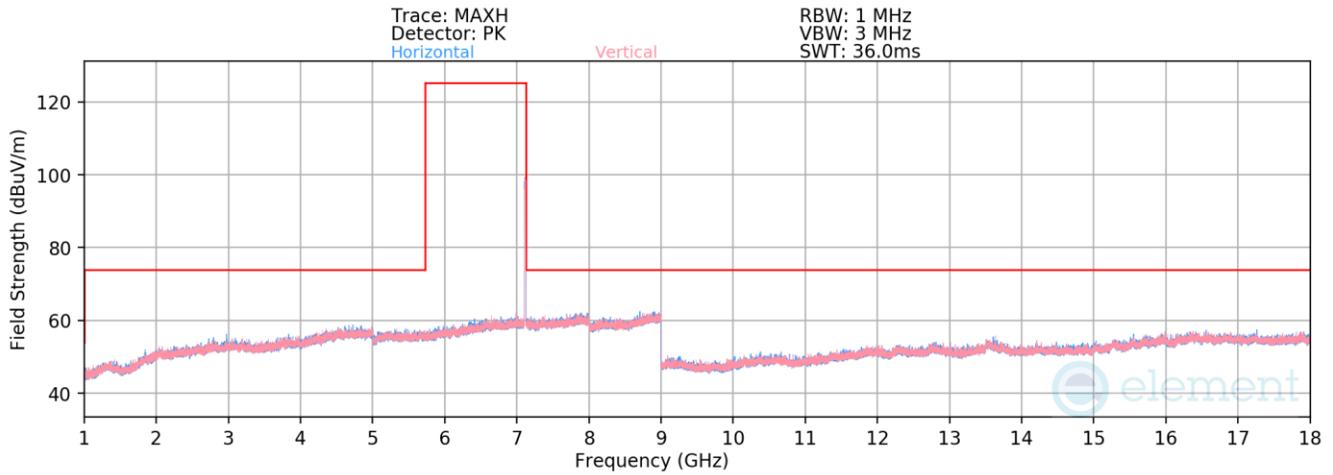

Plot 7-720. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 229 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.46	18.14	41.68	68.20	-26.52

Table 7-99. Radiated Spurious Emission Measurements Antenna 4a – RU242


FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 231 of 324

7.7.3 SDM Primary Radiated Spurious Emission

RU26

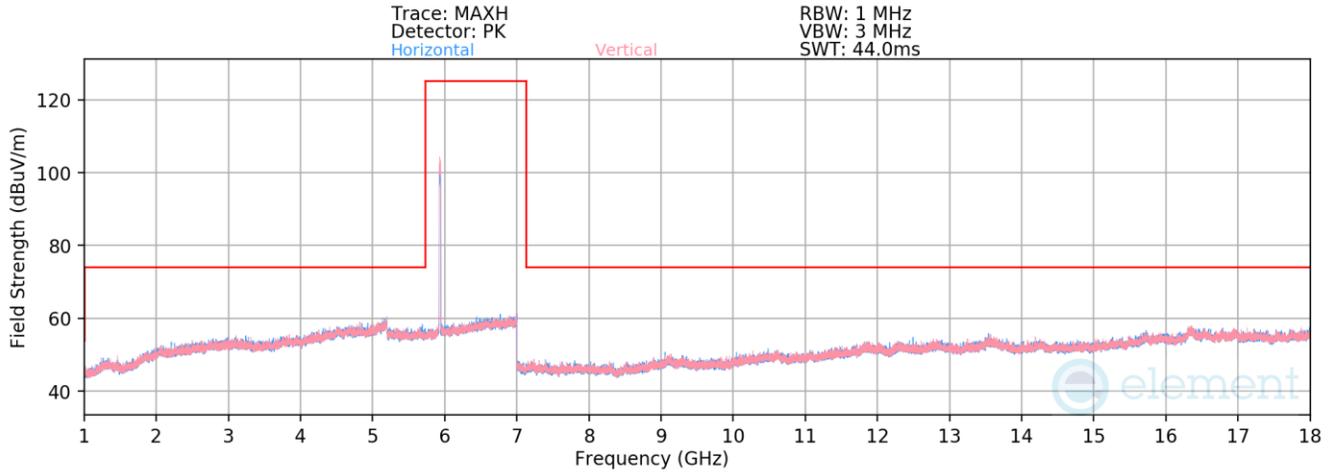


Plot 7-721. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 1 – RU26)

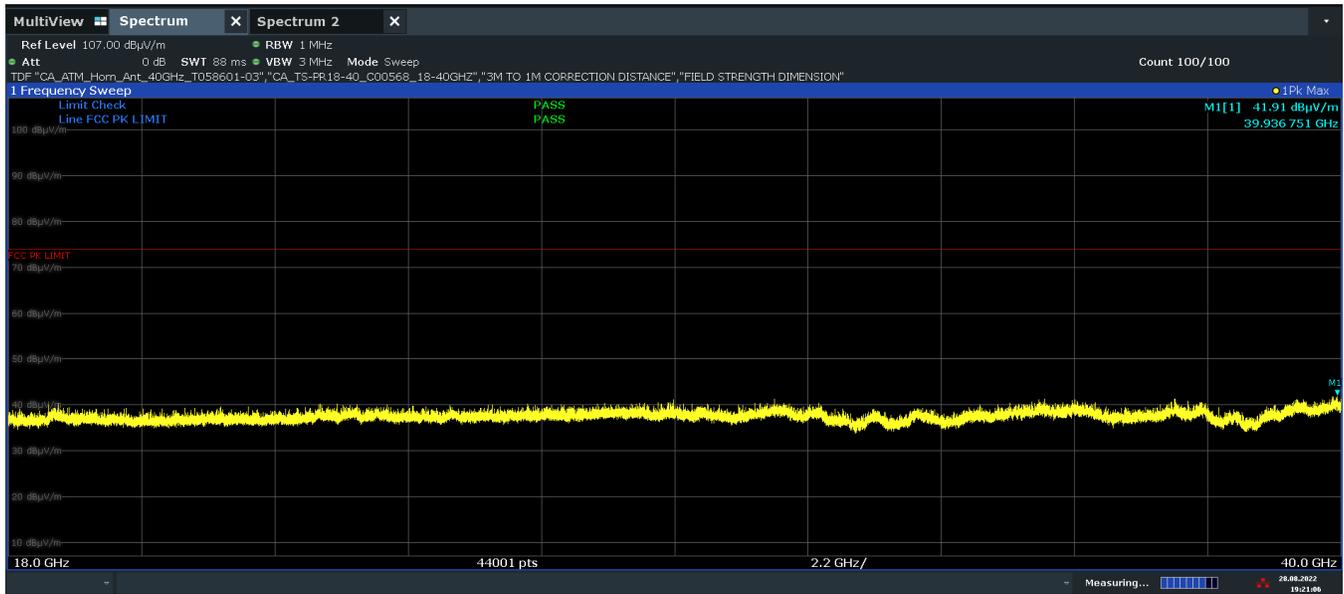

Plot 7-722. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU26, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 232 of 324

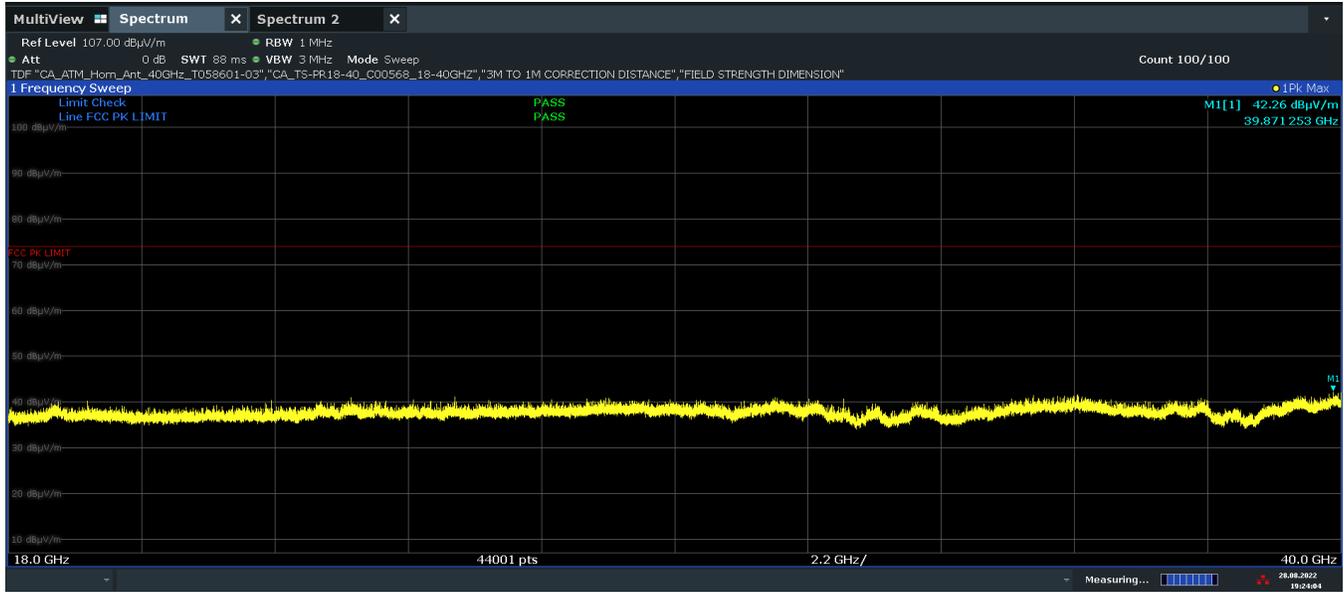

19:24:04 28.08.2022

Plot 7-723. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU26, Pol. V)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11870.00	Peak	H	-	-	-72.36	16.96	51.60	73.98	-22.38
* 11870.00	Average	H	-	-	-83.48	16.96	40.48	53.98	-13.50
* 17805.00	Peak	H	-	-	-72.57	21.89	56.32	73.98	-17.66
* 17805.00	Average	H	-	-	-84.07	21.89	44.82	53.98	-9.16

Table 7-100. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 233 of 324

V 10.5 12/15/2021

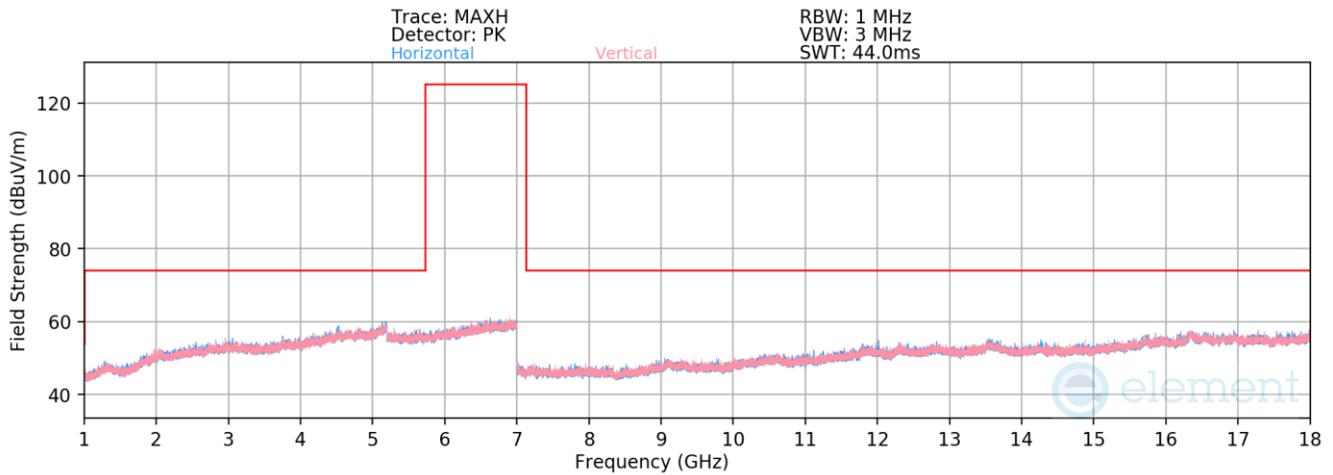


Plot 7-724. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 45 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Peak	H	-	-	-72.44	17.83	52.39	73.98	-21.59
* 12350.00	Average	H	-	-	-84.19	17.83	40.64	53.98	-13.34

Table 7-101. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 234 of 324

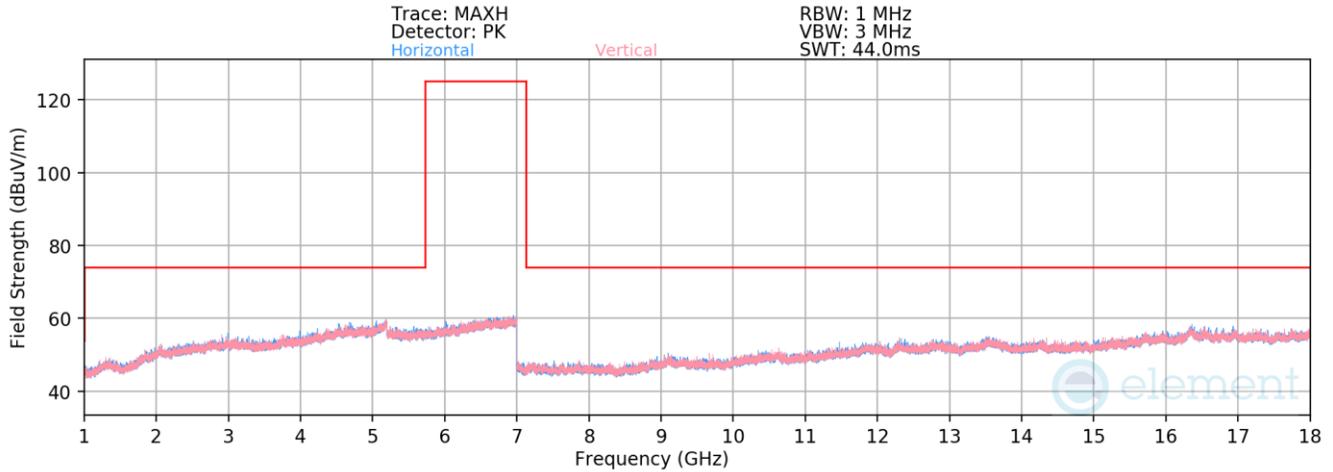


Plot 7-725. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 93 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.17	18.55	41.38	68.20	-26.82

Table 7-102. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 235 of 324

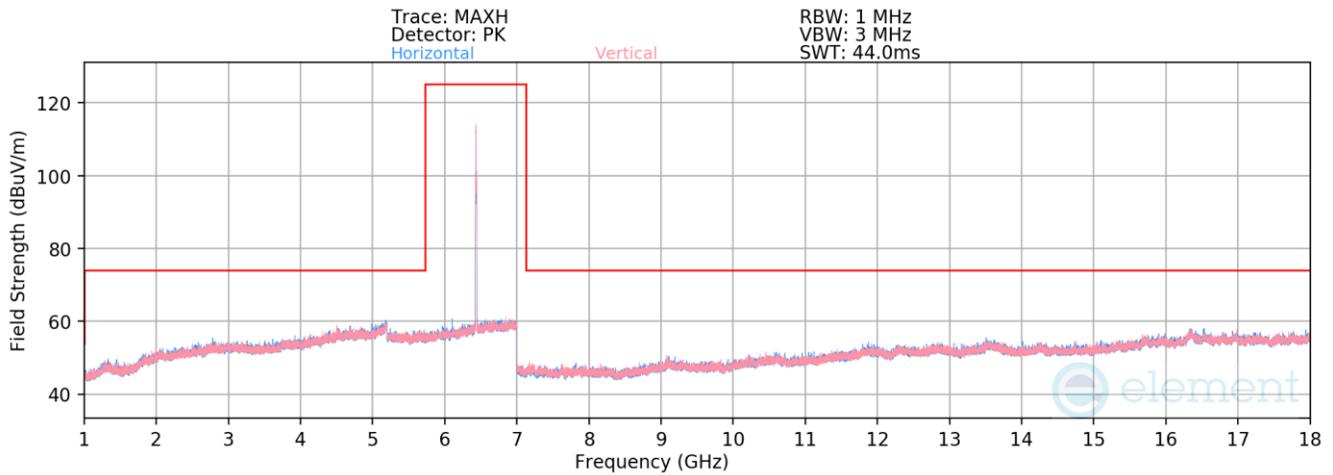


Plot 7-726. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 97 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-83.92	18.68	41.76	68.20	-26.44

Table 7-103. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 236 of 324

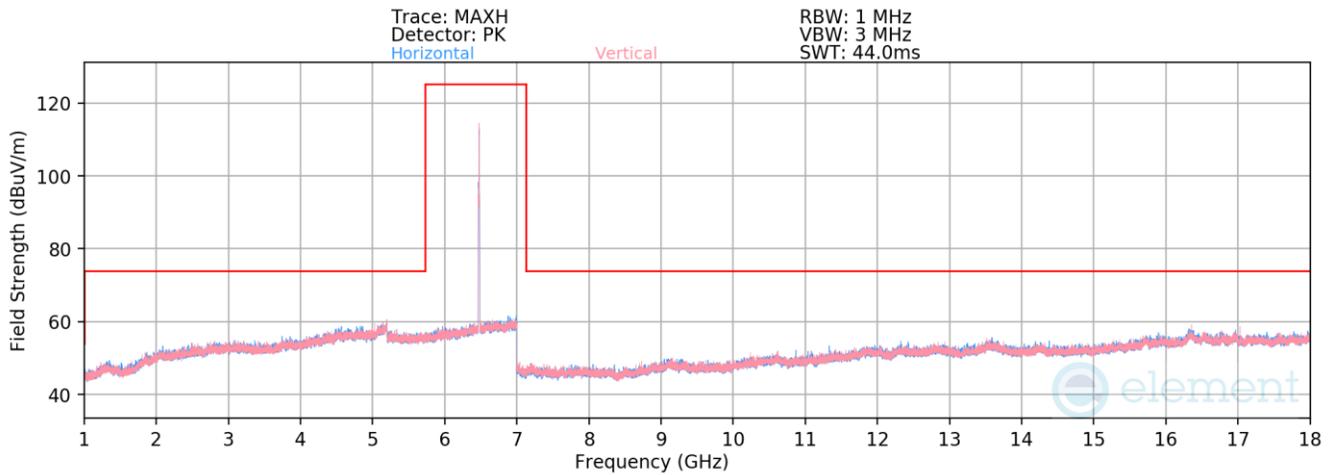


Plot 7-727. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 105 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-83.73	18.16	41.43	68.20	-26.77

Table 7-104. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 237 of 324

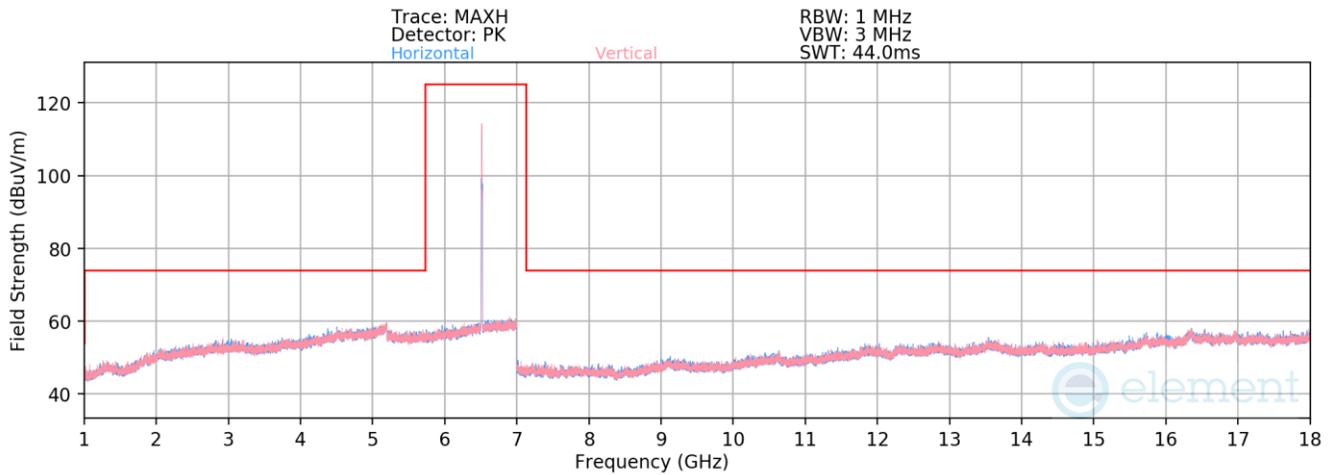


Plot 7-728. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 113 – RU26)

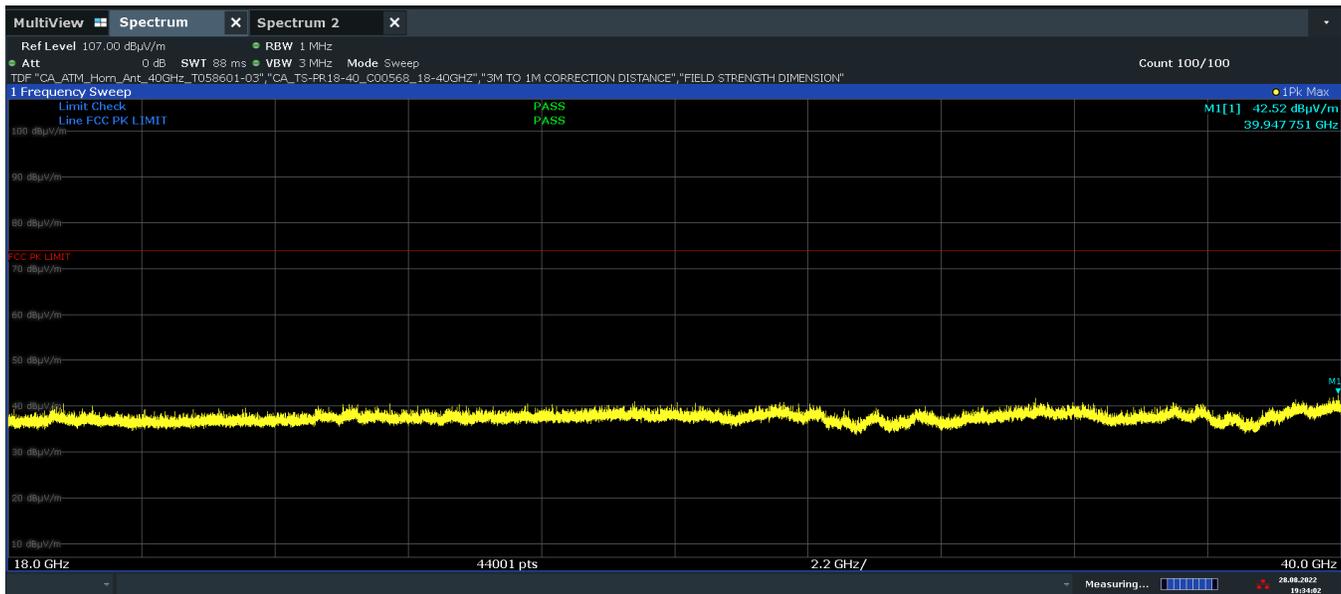

Plot 7-729. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 113 – RU26, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 238 of 324

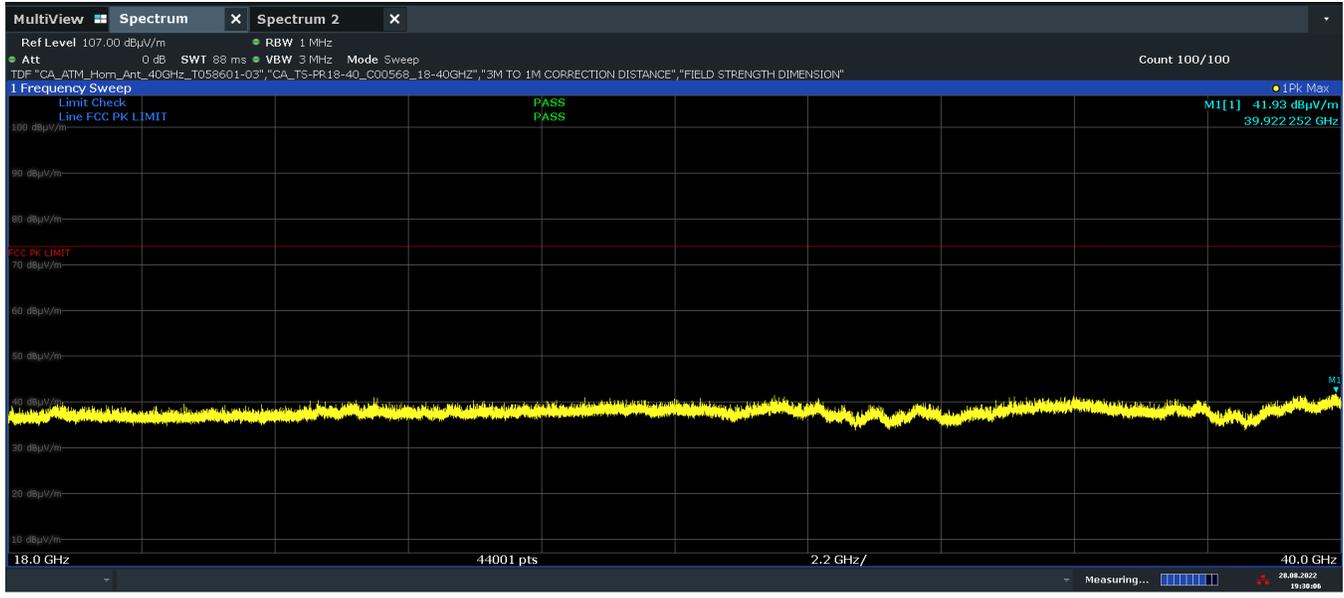

19:30:06 28.08.2022

Plot 7-730. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 113 – RU26, Pol. V)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-83.88	18.52	41.64	68.20	-26.56

Table 7-105. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 239 of 324

V 10.5 12/15/2021

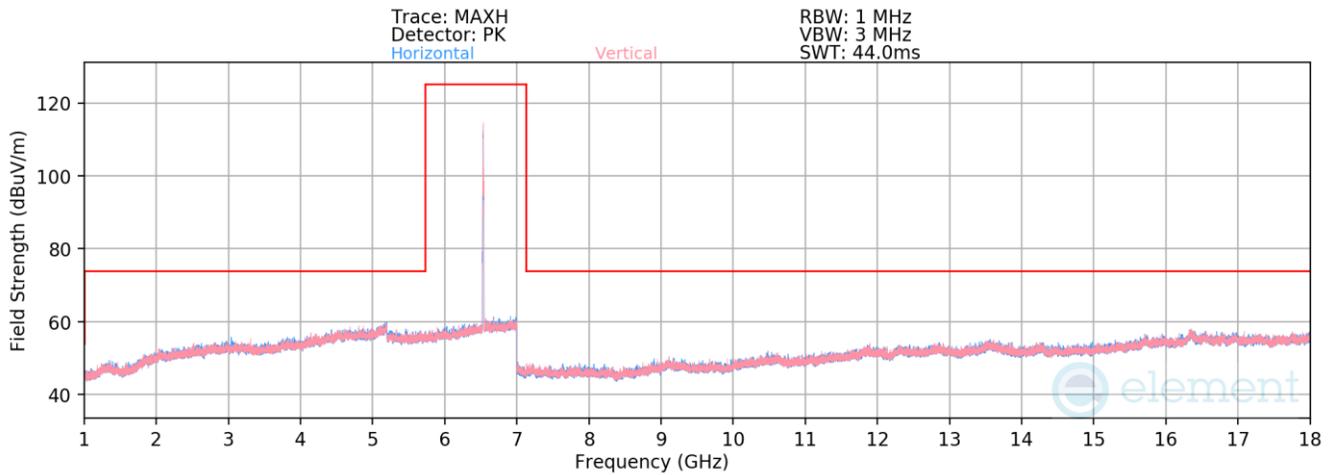


Plot 7-731. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 117 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.86	18.31	41.45	68.20	-26.75

Table 7-106. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 240 of 324

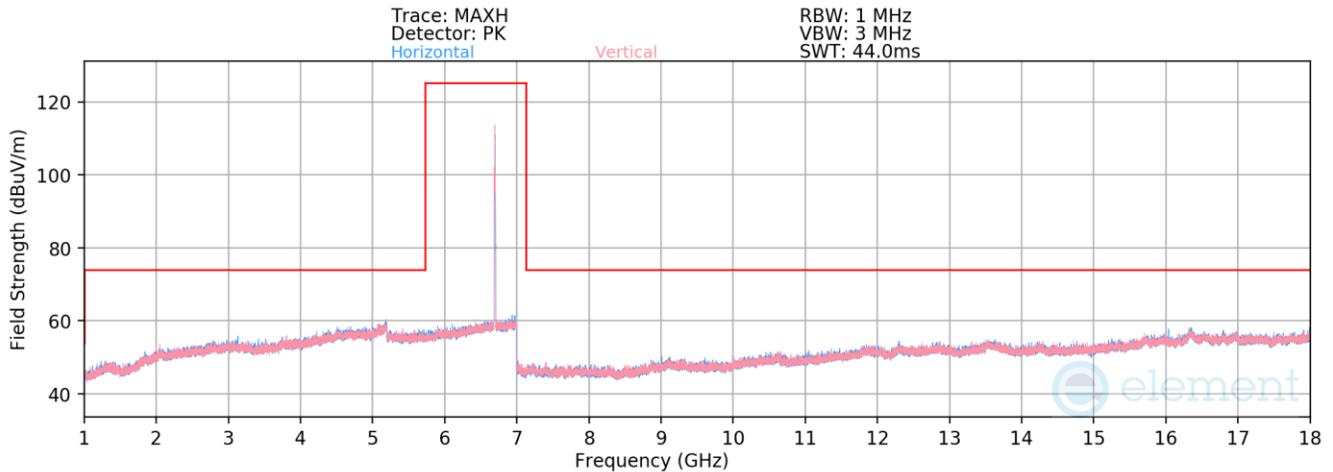


Plot 7-732. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 149 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.33	18.01	52.68	73.98	-21.30
* 13390.00	Average	H	-	-	-83.98	18.01	41.03	53.98	-12.95

Table 7-107. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 241 of 324

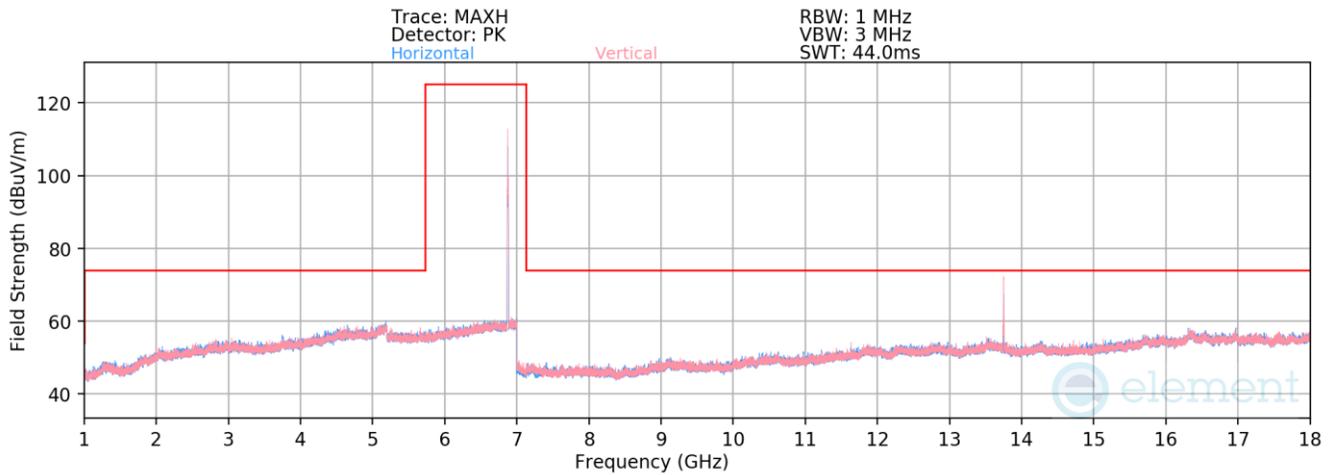


Plot 7-733. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 185 – RU26)

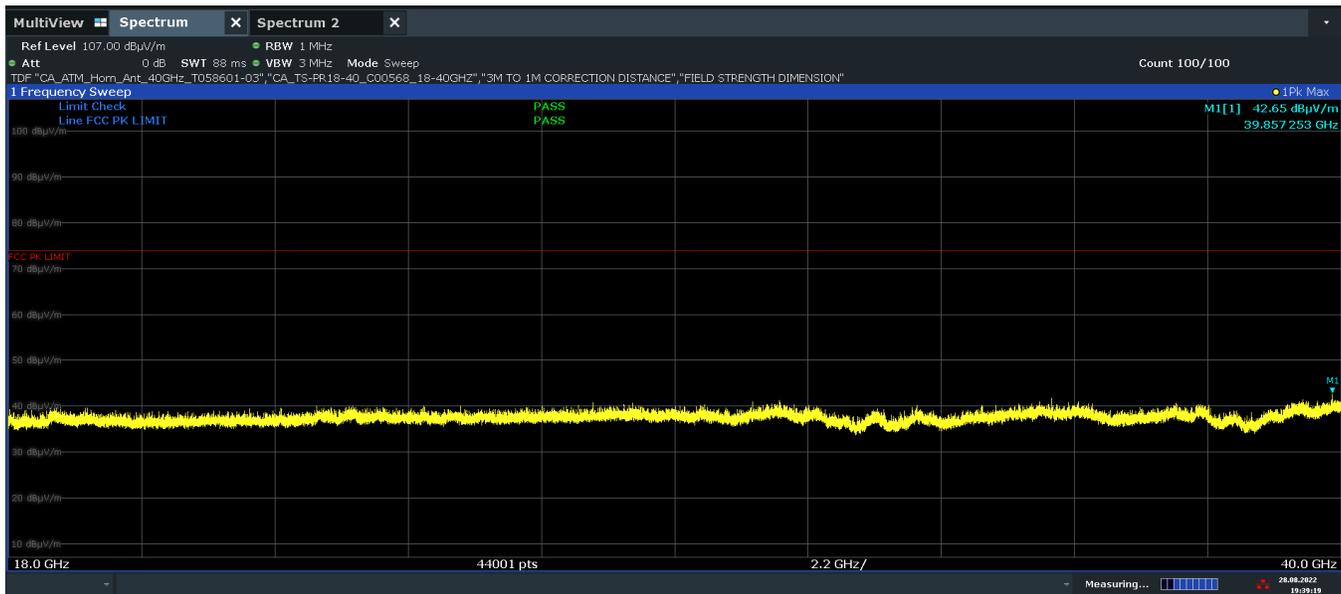

Plot 7-734. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 185 – RU26, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG		Test Dates: 5/30/2022 - 9/16/2022

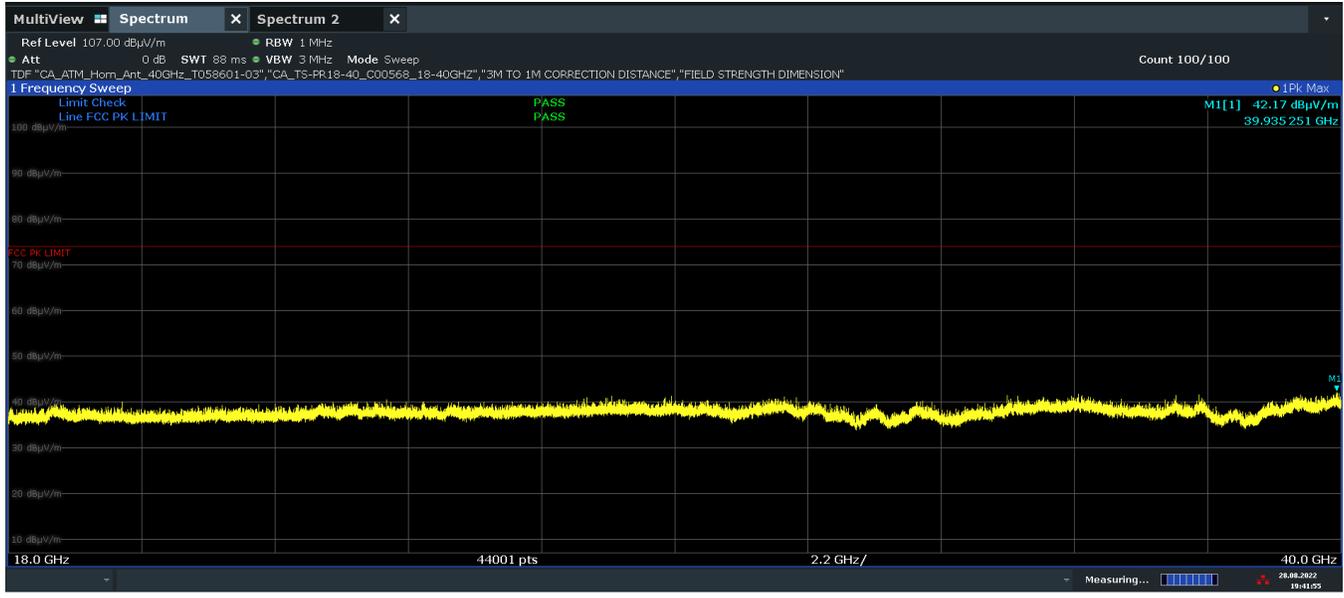

19:41:55 28.08.2022

Plot 7-735. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 185 – RU26, Pol. V)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13750.00	Average	H	-	-	-82.71	17.84	42.13	68.20	-26.07

Table 7-108. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 243 of 324

V 10.5 12/15/2021

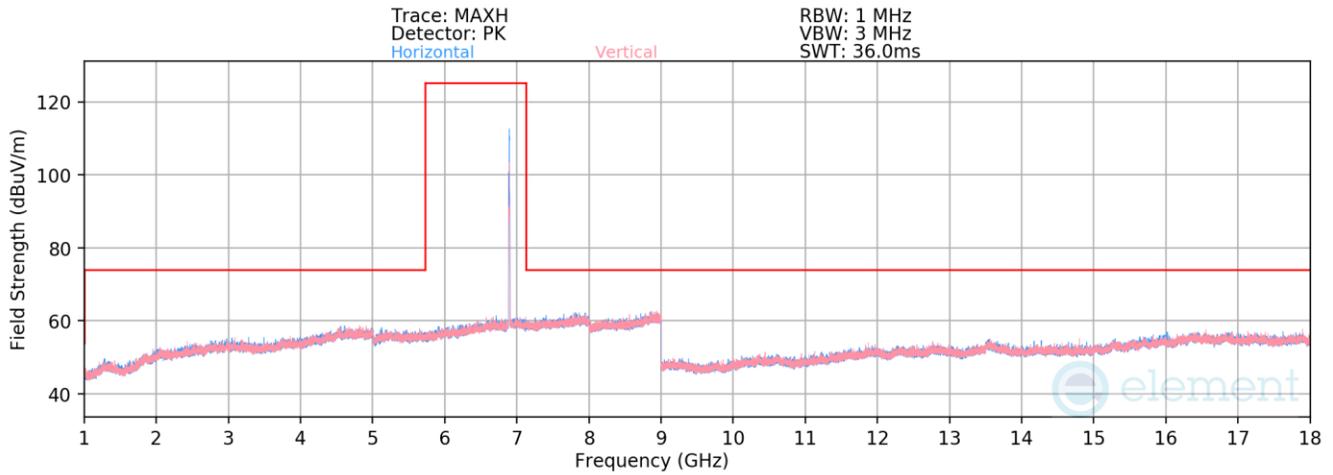


Plot 7-736. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 189 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.18	17.84	41.66	68.20	-26.54

Table 7-109. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 244 of 324

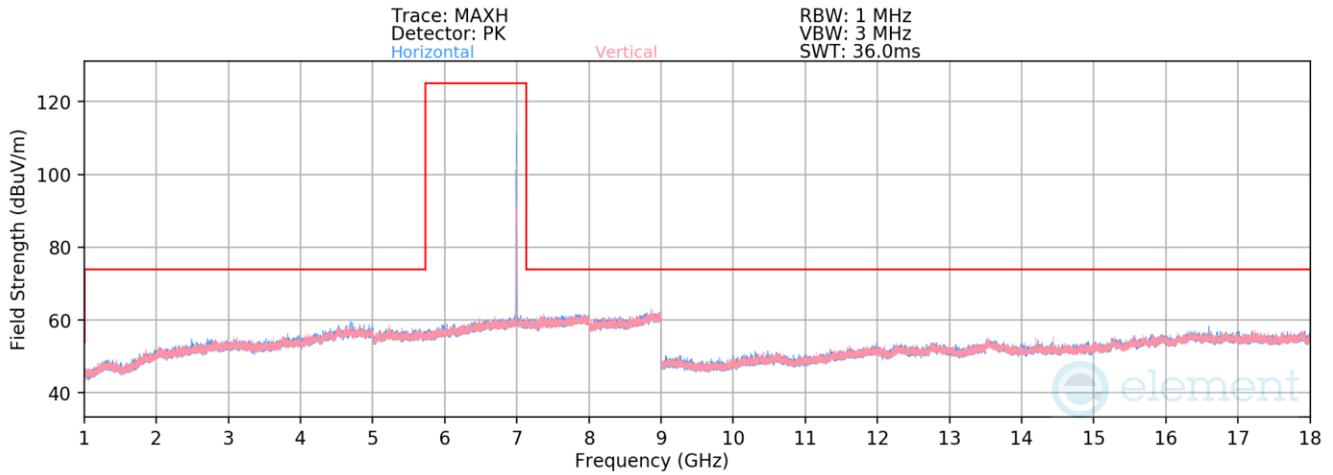


Plot 7-737. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 209 – RU26)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-83.26	17.91	41.65	68.20	-26.55

Table 7-110. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 245 of 324

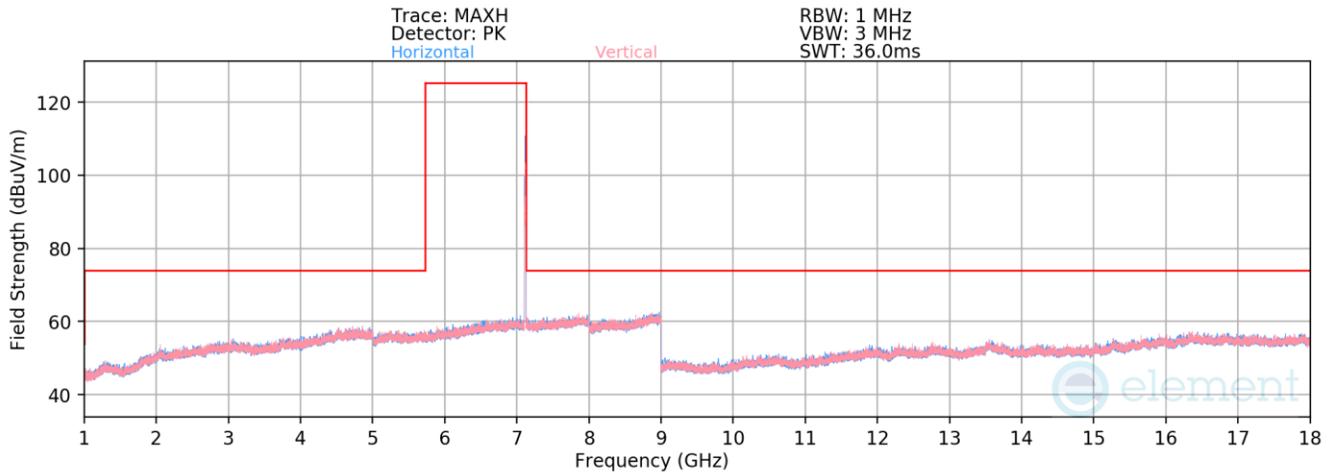


Plot 7-738. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 229 – RU26)

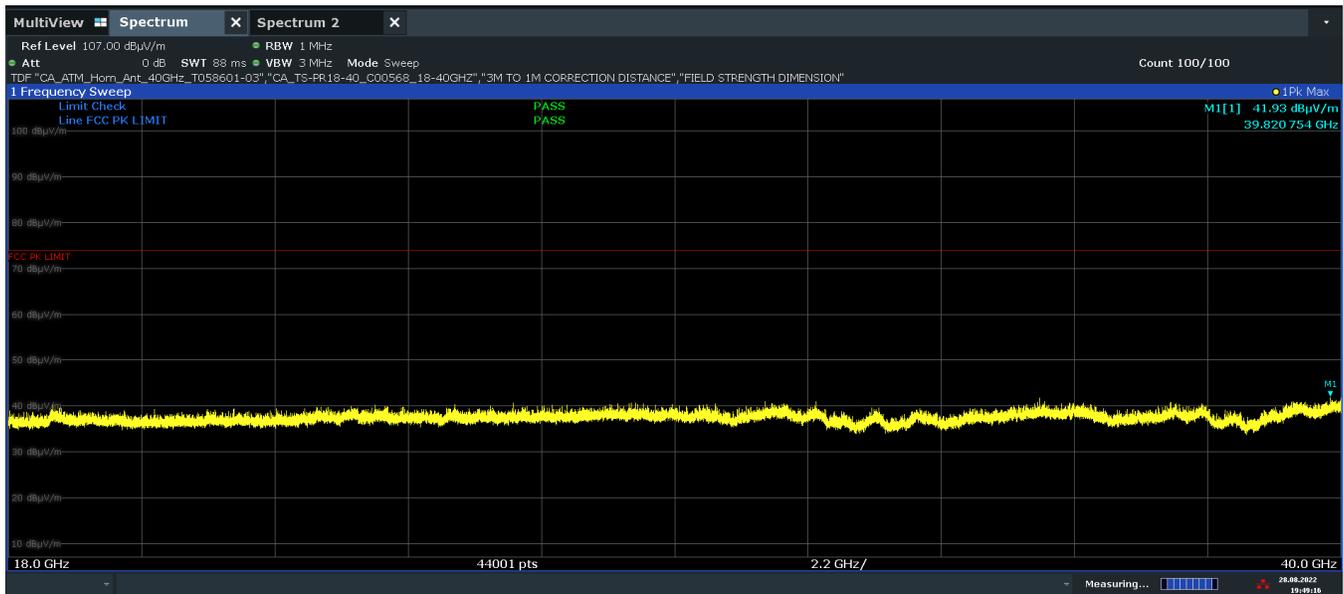

Plot 7-739. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU26, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 246 of 324

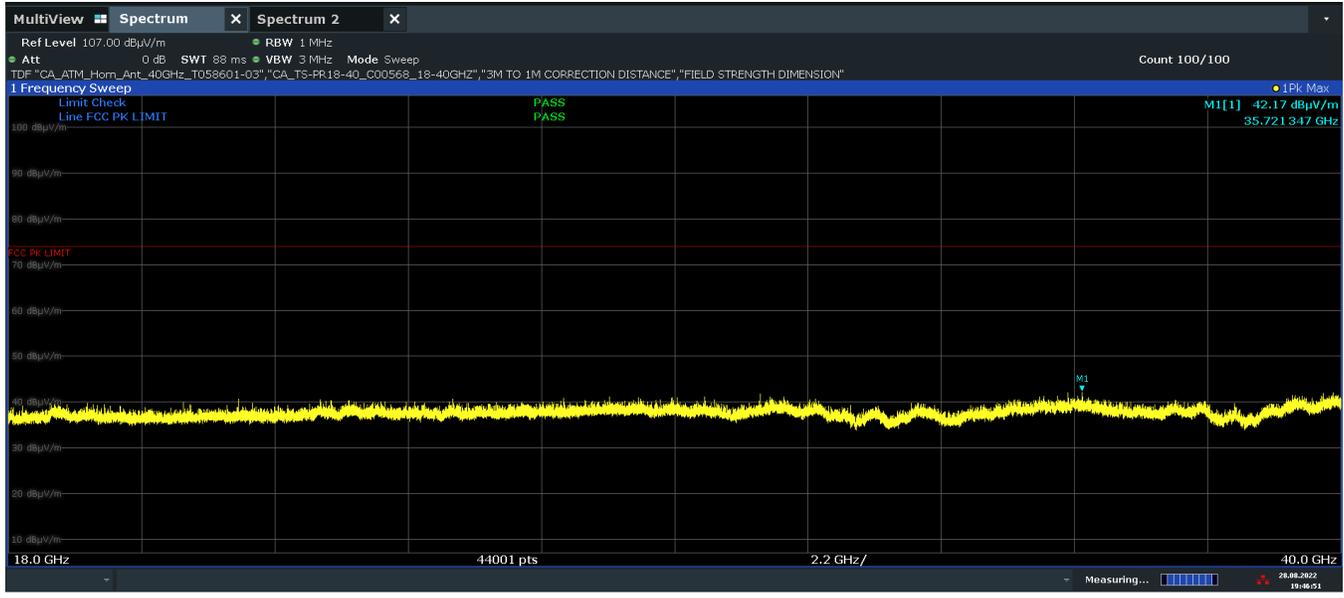

Plot 7-740. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU26, Pol. V)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-84.91	18.64	40.73	68.20	-27.47

Table 7-111. Radiated Spurious Emission Measurements SDM – RU26

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 247 of 324

RU242

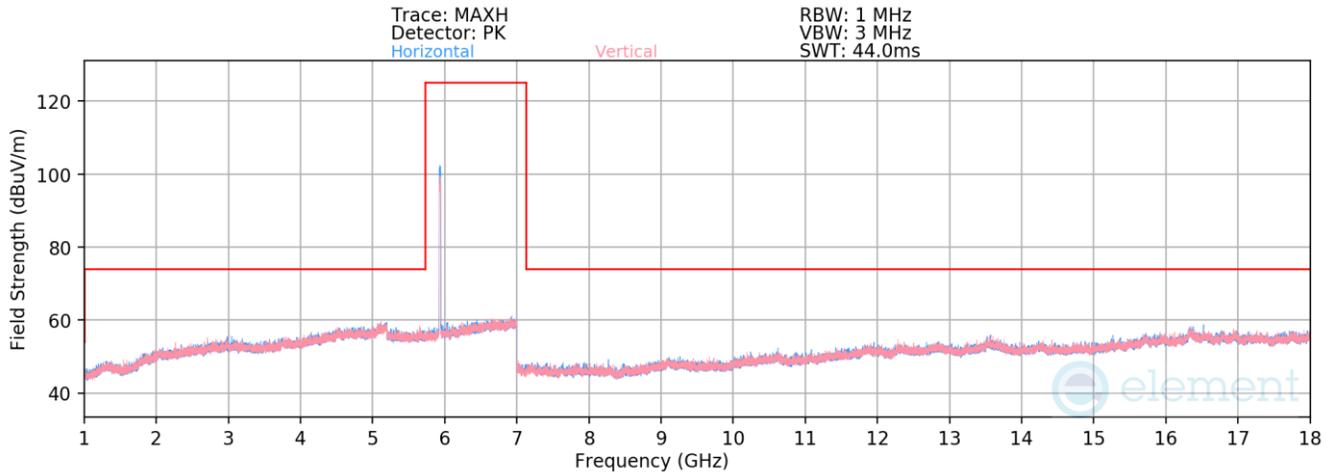

Plot 7-741. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 1 – RU242)




20:54:37 20.00.2022

Plot 7-742. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 248 of 324

V 10.5 12/15/2021

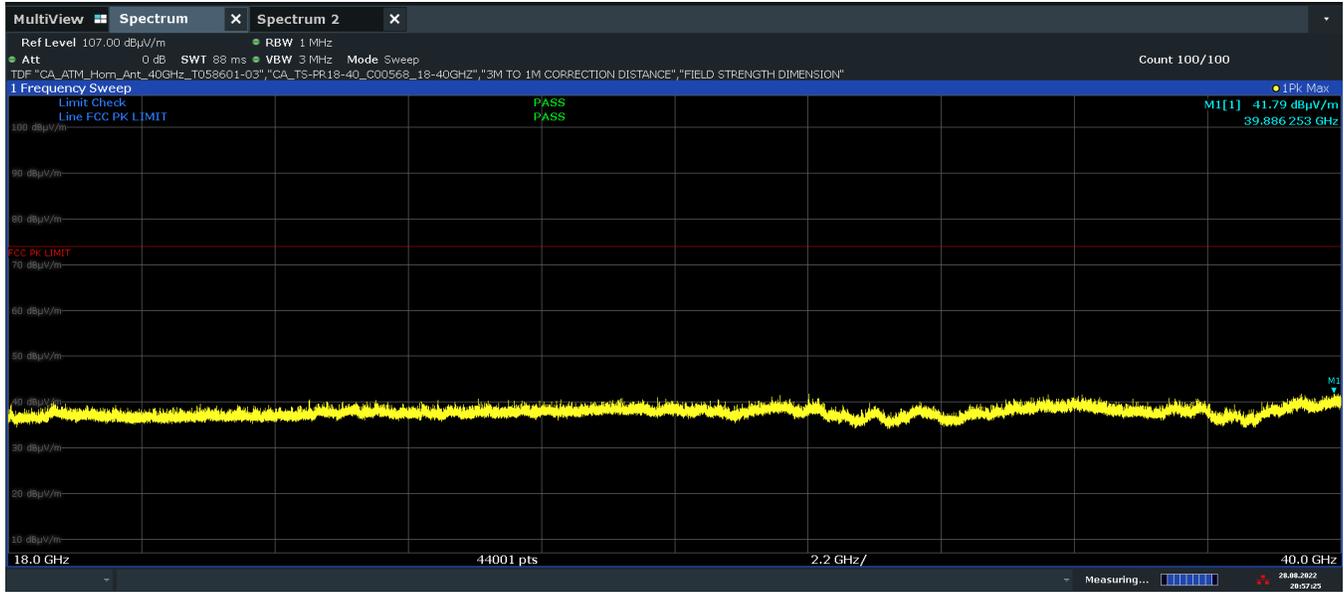

20:57:25 28.08.2022

Plot 7-743. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. V)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11870.00	Peak	H	-	-	-72.18	16.96	51.78	73.98	-22.20
* 11870.00	Average	H	-	-	-83.51	16.96	40.45	53.98	-13.53
* 17805.00	Peak	H	-	-	-72.99	21.89	55.90	73.98	-18.08
* 17805.00	Average	H	-	-	-84.08	21.89	44.81	53.98	-9.17

Table 7-112. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 249 of 324

V 10.5 12/15/2021

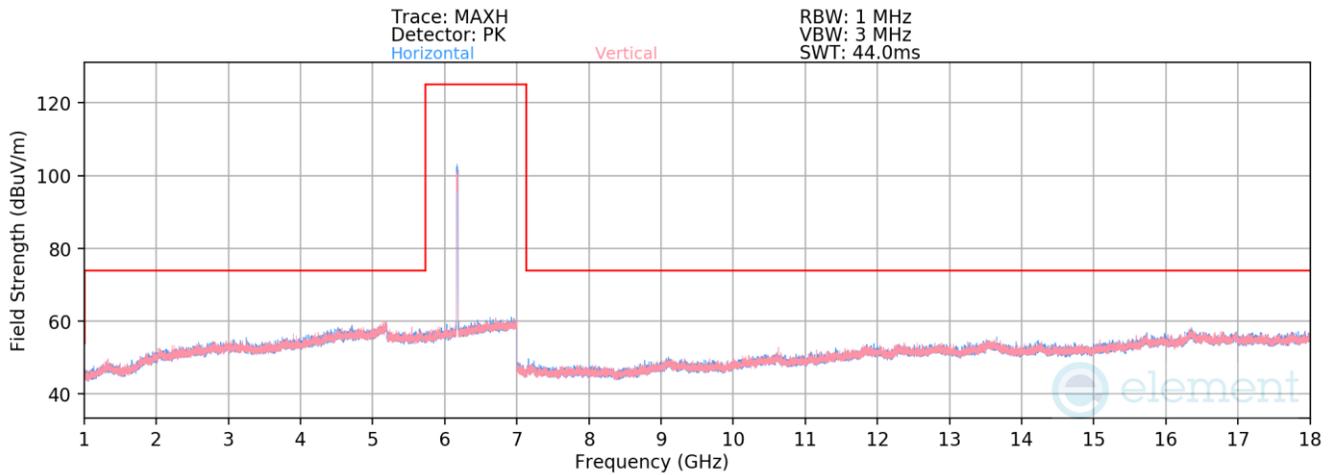


Plot 7-744. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 45 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Peak	H	-	-	-72.40	17.83	52.43	73.98	-21.55
* 12350.00	Average	H	-	-	-84.18	17.83	40.65	53.98	-13.33

Table 7-113. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 250 of 324

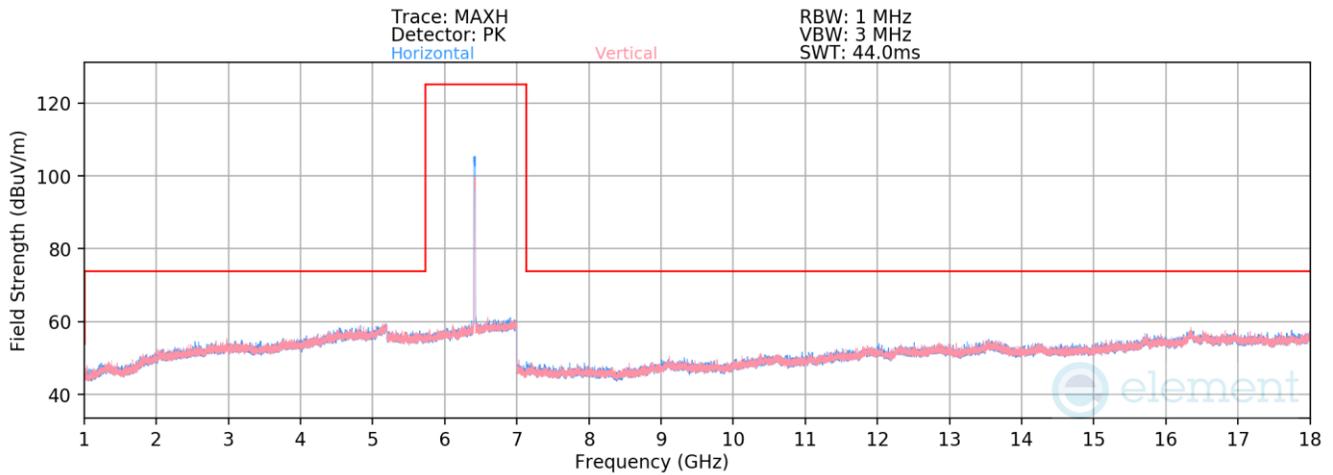


Plot 7-745. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 93 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.30	18.55	41.25	68.20	-26.95

Table 7-114. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 251 of 324

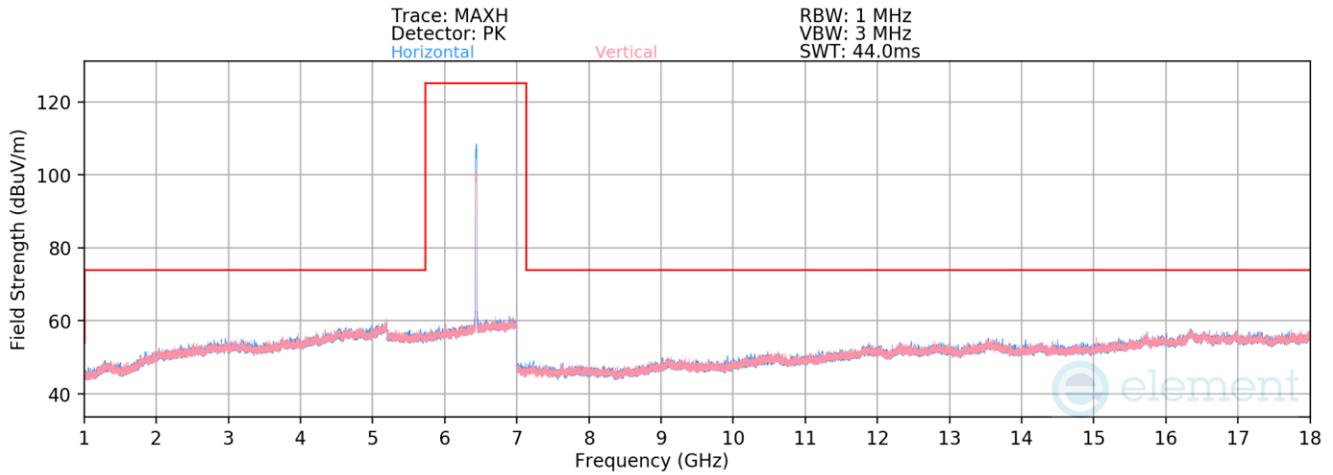


Plot 7-746. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 97 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-83.91	18.68	41.77	68.20	-26.43

Table 7-115. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 252 of 324

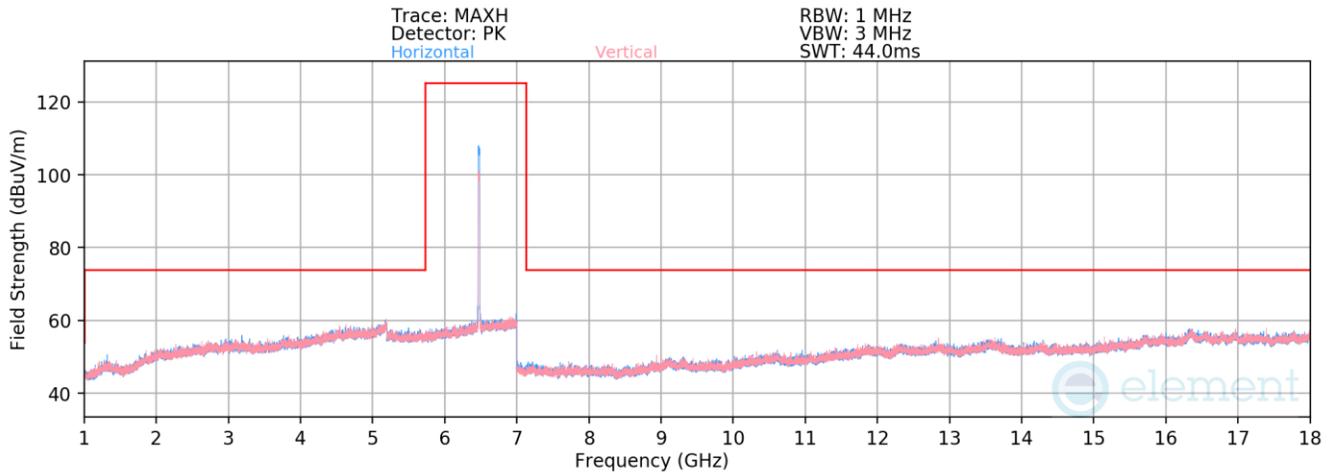


Plot 7-747. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 105 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-83.58	18.16	41.58	68.20	-26.62

Table 7-116. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 253 of 324

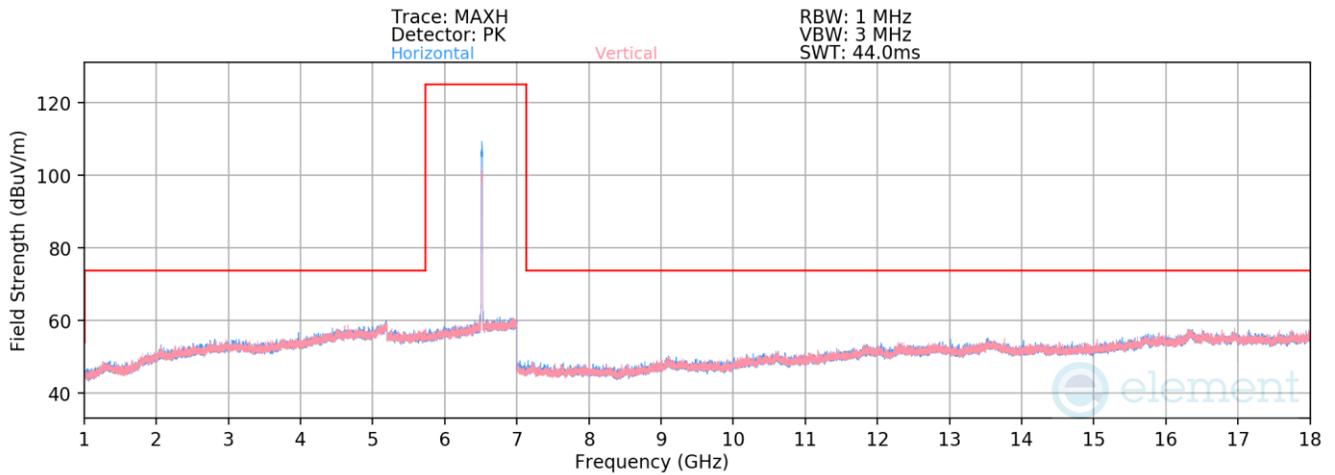


Plot 7-748. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 113 – RU242)

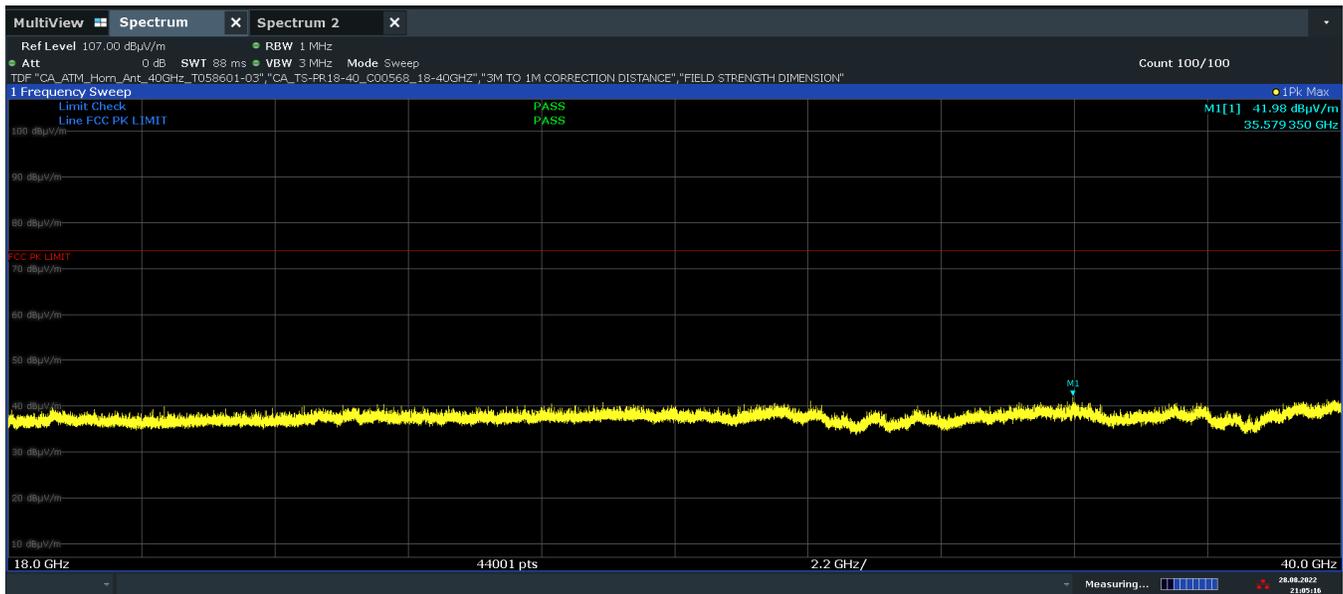

Plot 7-749. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 254 of 324

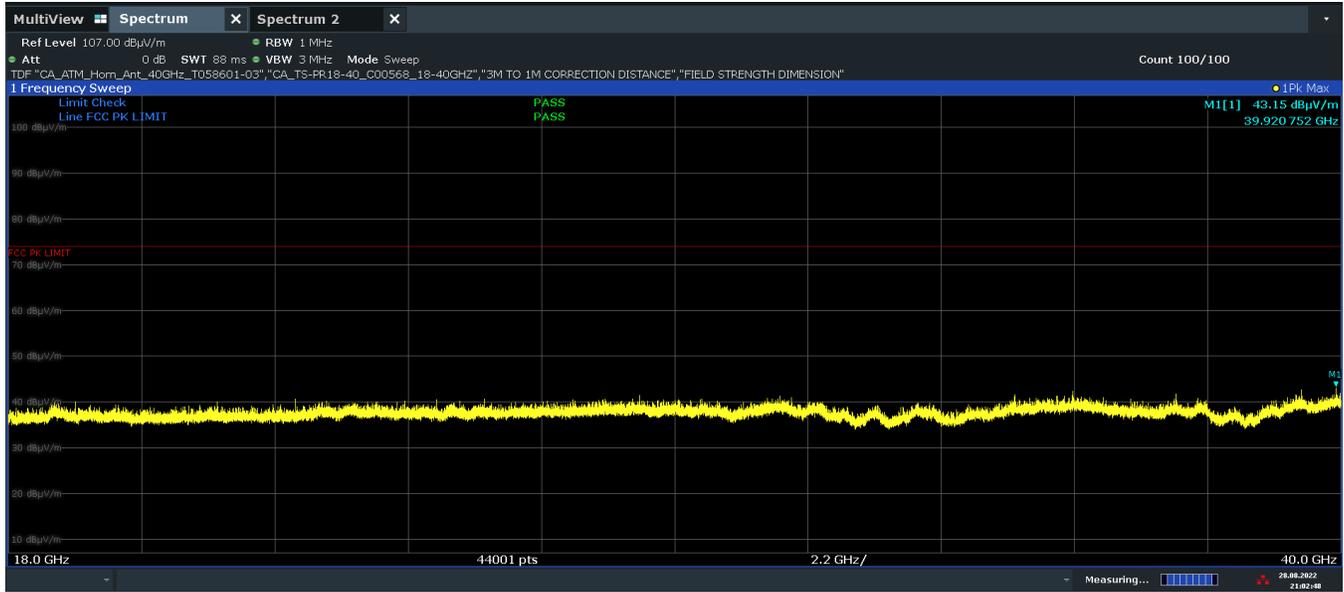

21:02:49 28.08.2022

Plot 7-750. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. V)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13030.00	Average	H	-	-	-84.03	18.52	41.49	68.20	-26.71

Table 7-117. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 255 of 324

V 10.5 12/15/2021

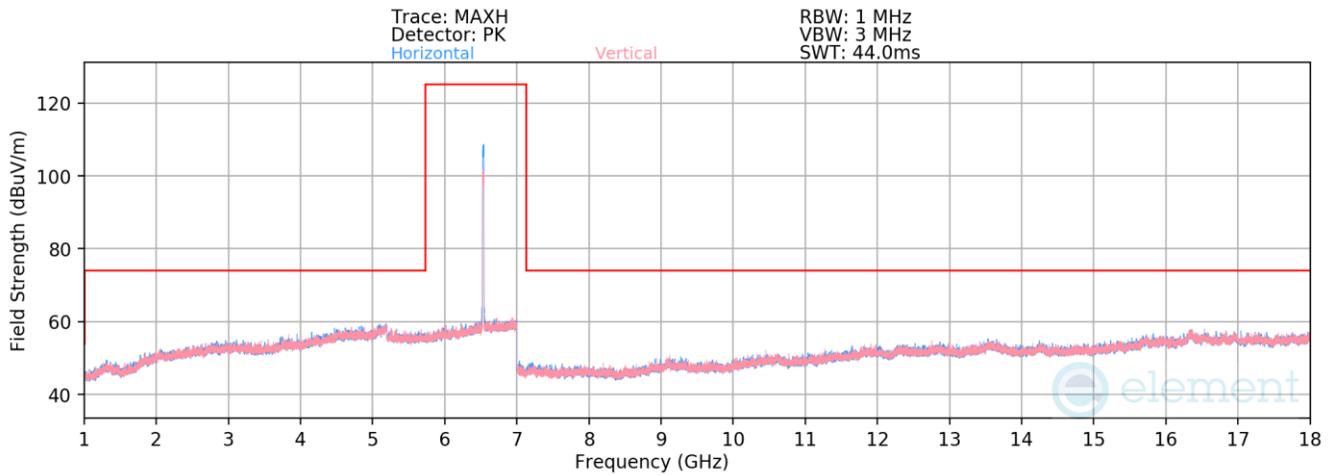


Plot 7-751. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 117 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.69	18.31	41.62	68.20	-26.58

Table 7-118. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 256 of 324

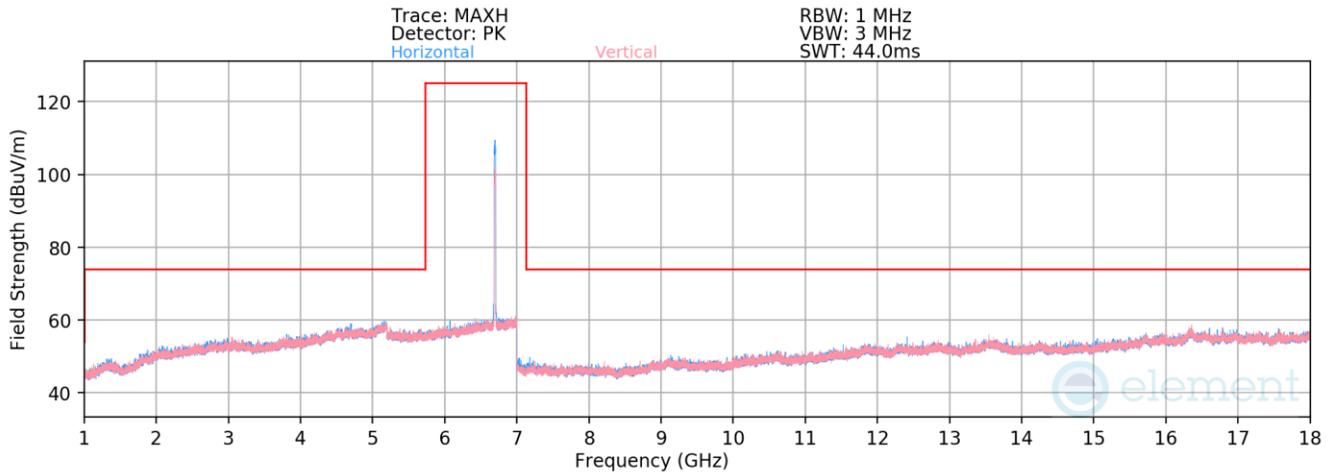


Plot 7-752. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 149 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 13390.00	Peak	H	-	-	-72.62	18.01	52.39	73.98	-21.59
* 13390.00	Average	H	-	-	-84.03	18.01	40.98	53.98	-13.00

Table 7-119. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 257 of 324

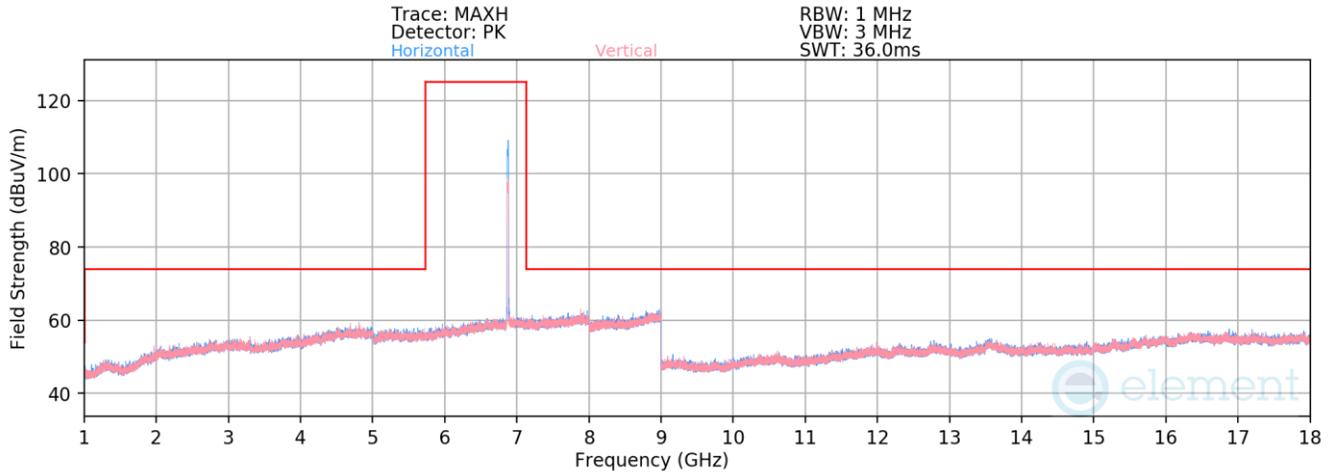

Plot 7-753. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 185 – RU242)

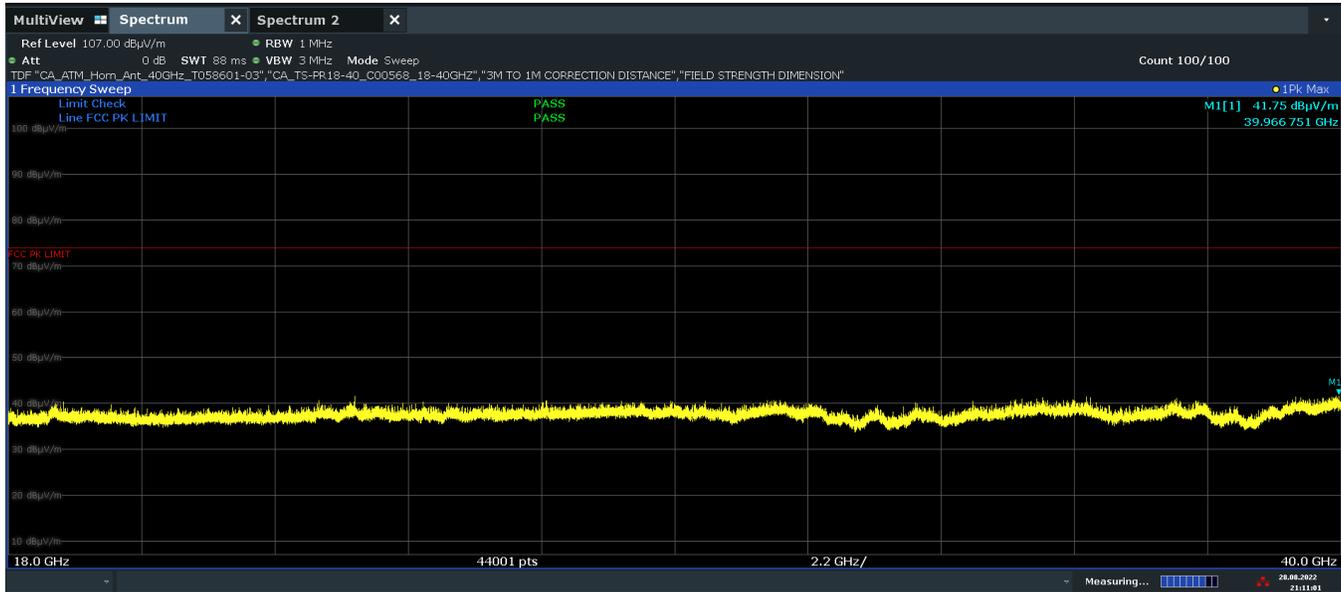


21:11:02 28.08.2022

Plot 7-754. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 258 of 324

V 10.5 12/15/2021

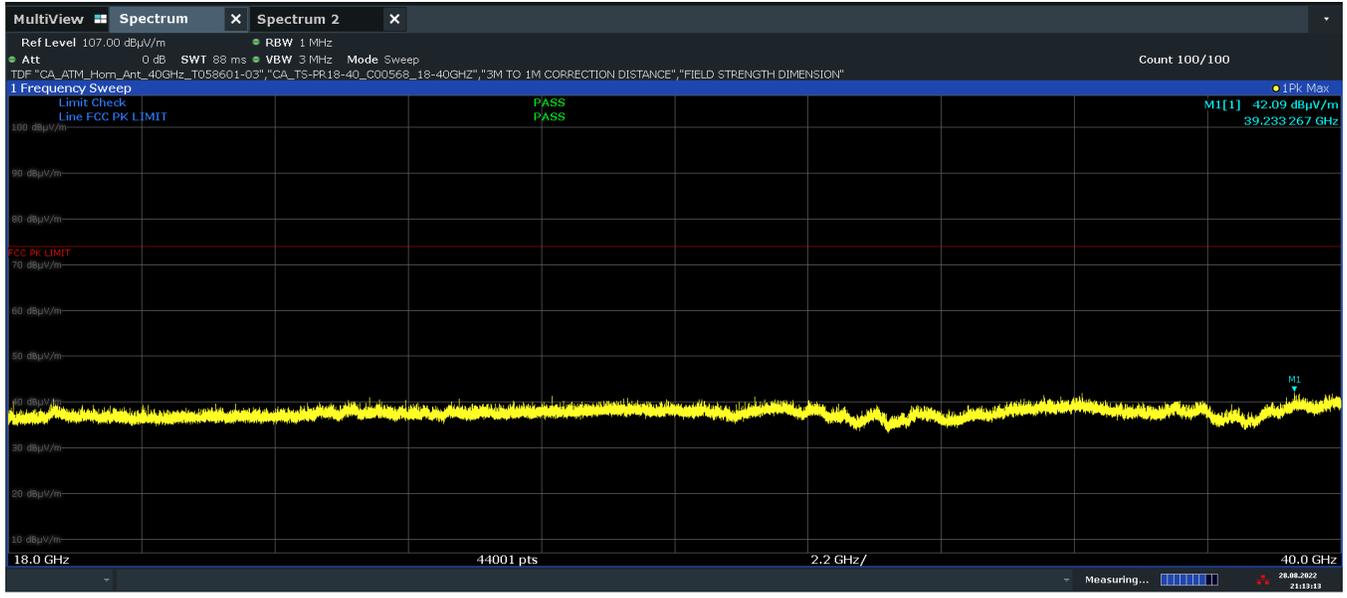

Plot 7-755. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. V)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 259 of 324


V 10.5 12/15/2021

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.40	17.82	41.42	68.20	-26.78

Table 7-120. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 260 of 324

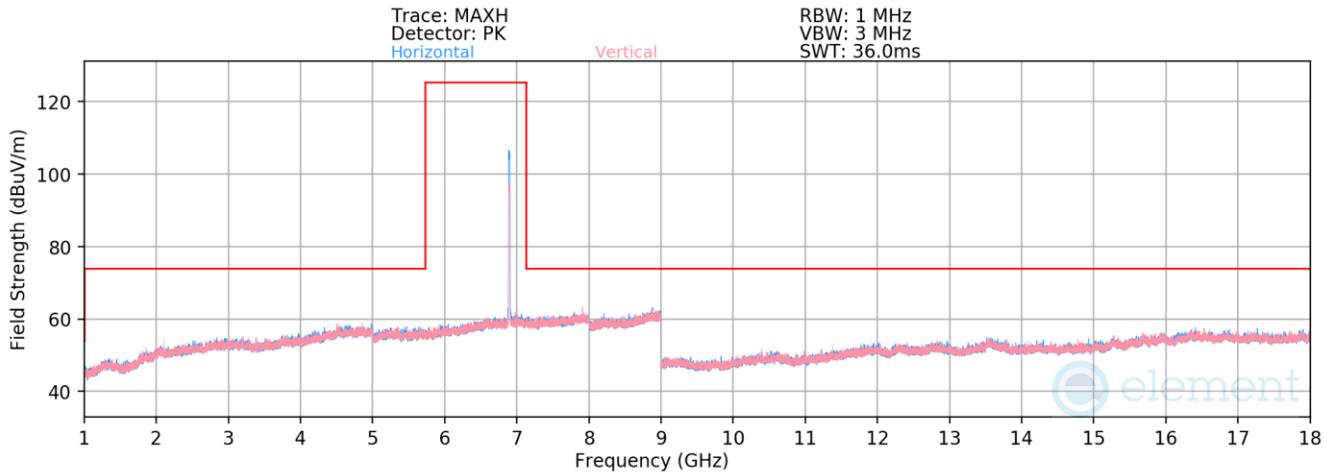


Plot 7-756. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 189 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-82.64	17.46	41.82	68.20	-26.38

Table 7-121. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 261 of 324

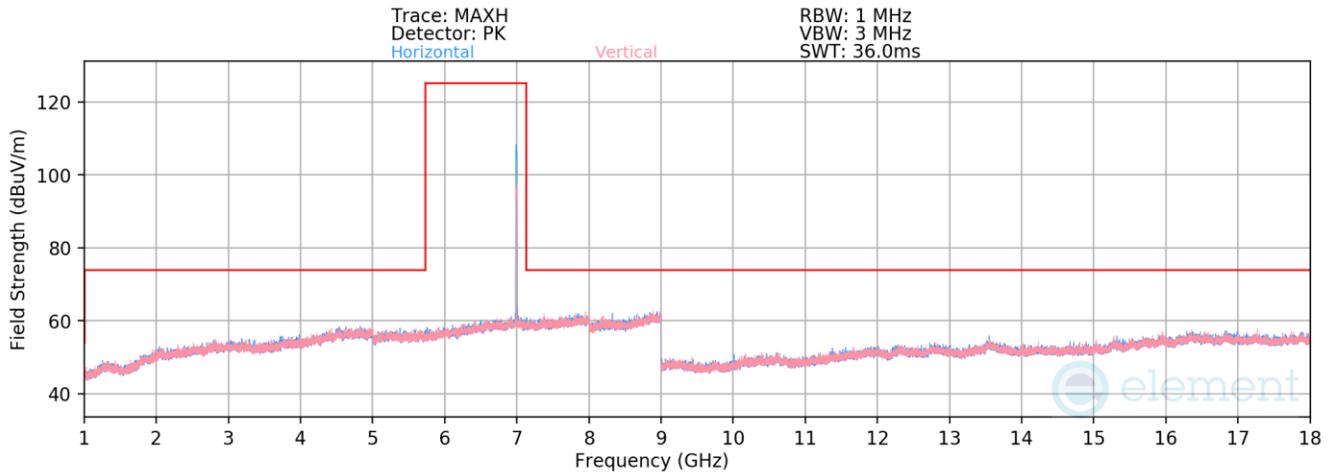


Plot 7-757. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 209 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-84.34	17.85	40.51	68.20	-27.69

Table 7-122. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 262 of 324

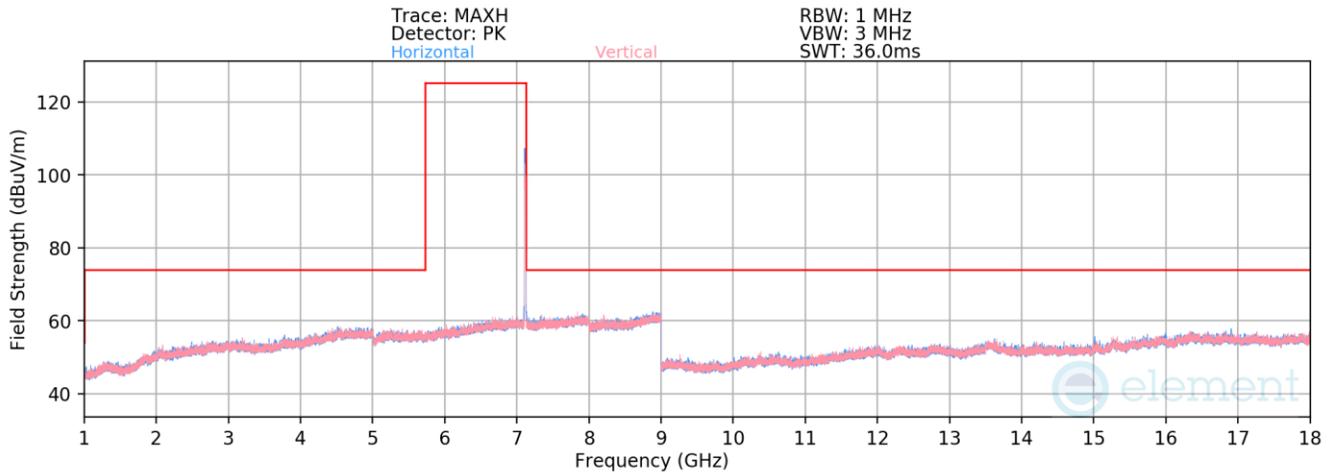

Plot 7-758. Radiated Spurious Emissions above 1GHz SDM (802.11ax – Ch. 229 – RU242)

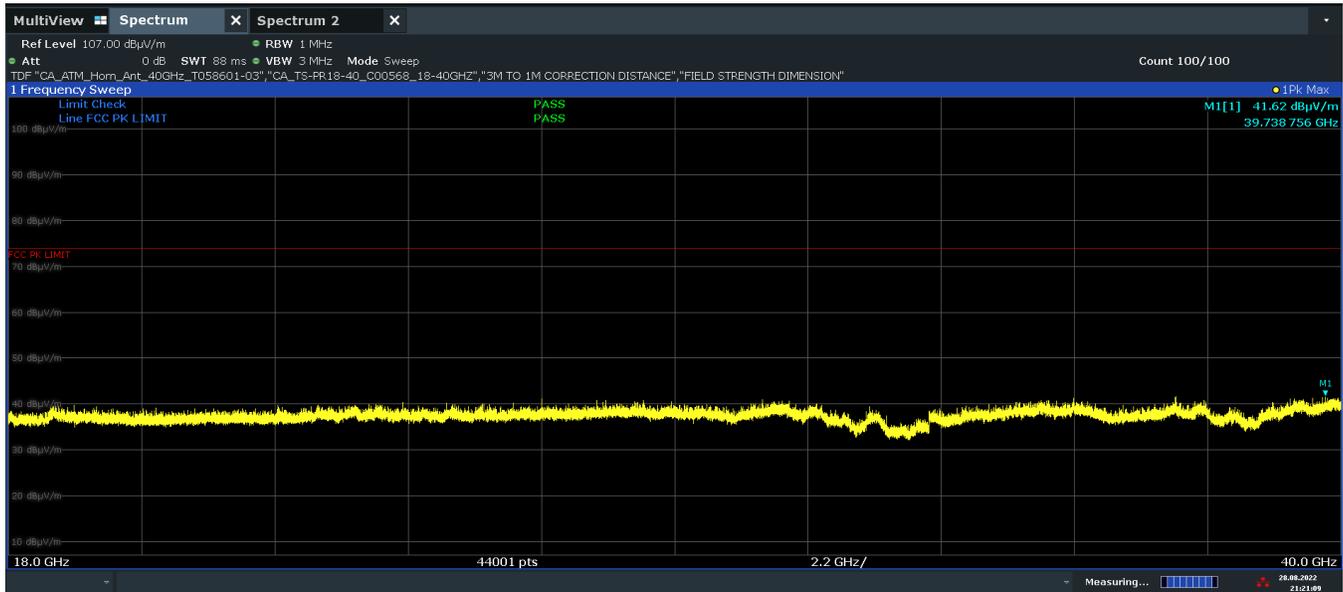


21:21:09 20.00.2022

Plot 7-759. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. H)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 263 of 324

V 10.5 12/15/2021

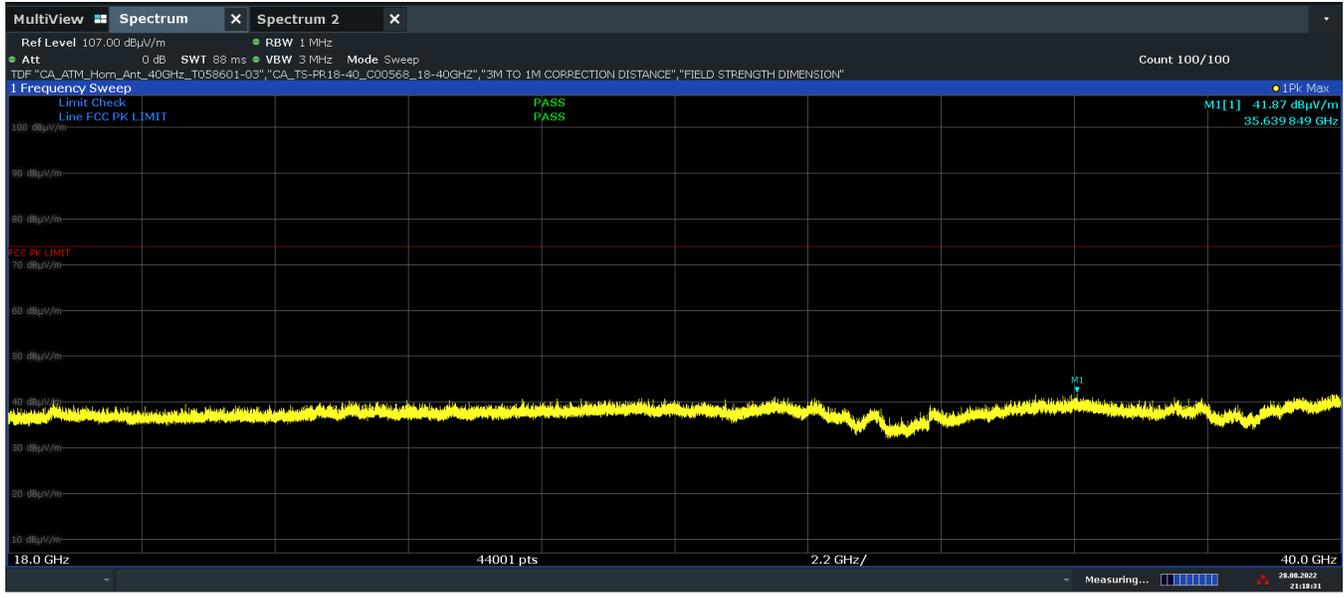

Plot 7-760. Radiated Spurious Emissions 18-40GHz SDM (802.11ax – Ch. 1 – RU242, Pol. V)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-84.01	18.14	41.13	68.20	-27.07


Table 7-123. Radiated Spurious Emission Measurements SDM – RU242

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device		Page 264 of 324

7.7.4 Antenna 5b Radiated Band Edge Measurements (20MHz BW)
 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

RU26


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

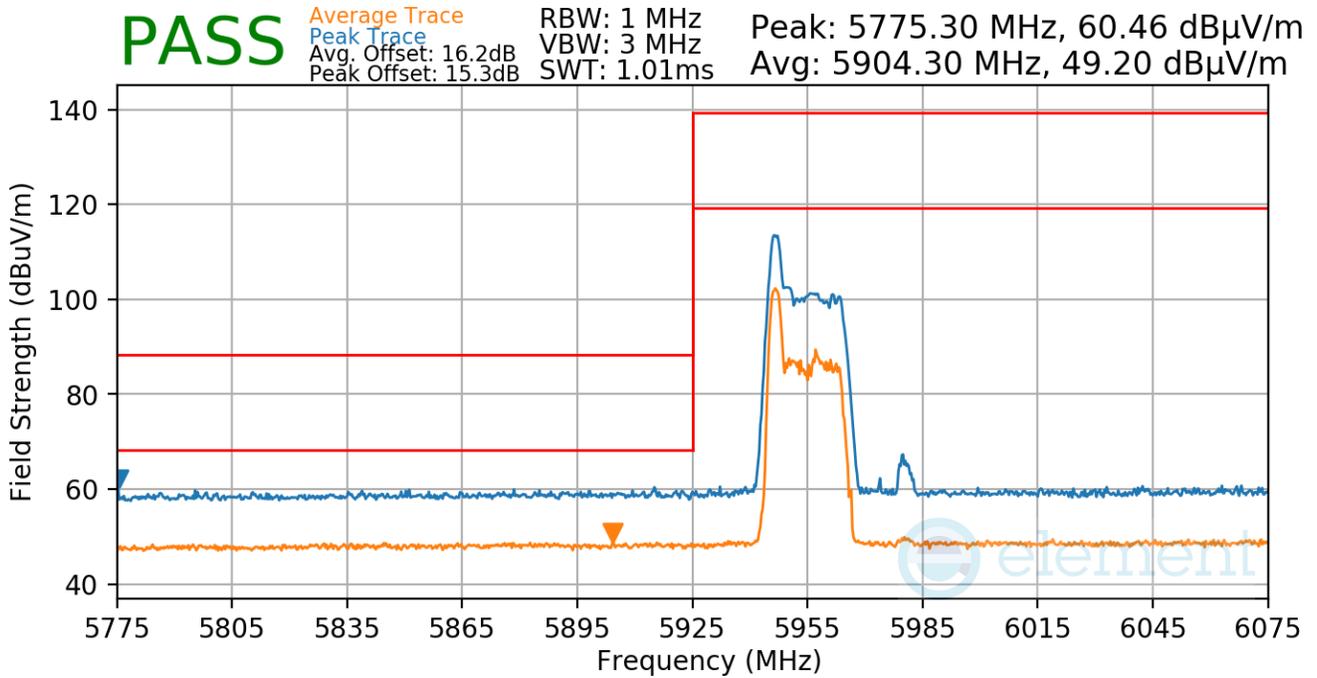

Plot 7-761. Antenna 5b Radiated Lower Band Edge (Peak/Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 265 of 324

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

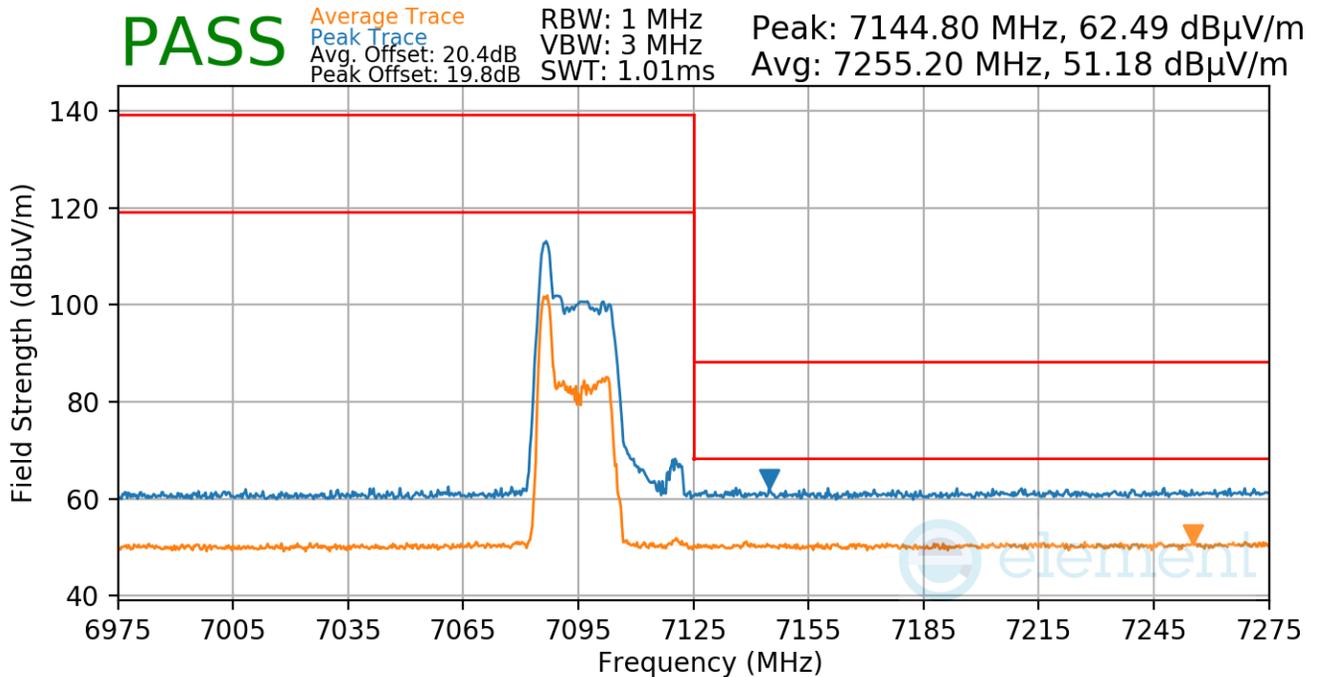


Plot 7-762. Antenna 5b Radiated Lower Band Edge (Peak/Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 266 of 324

RU242

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

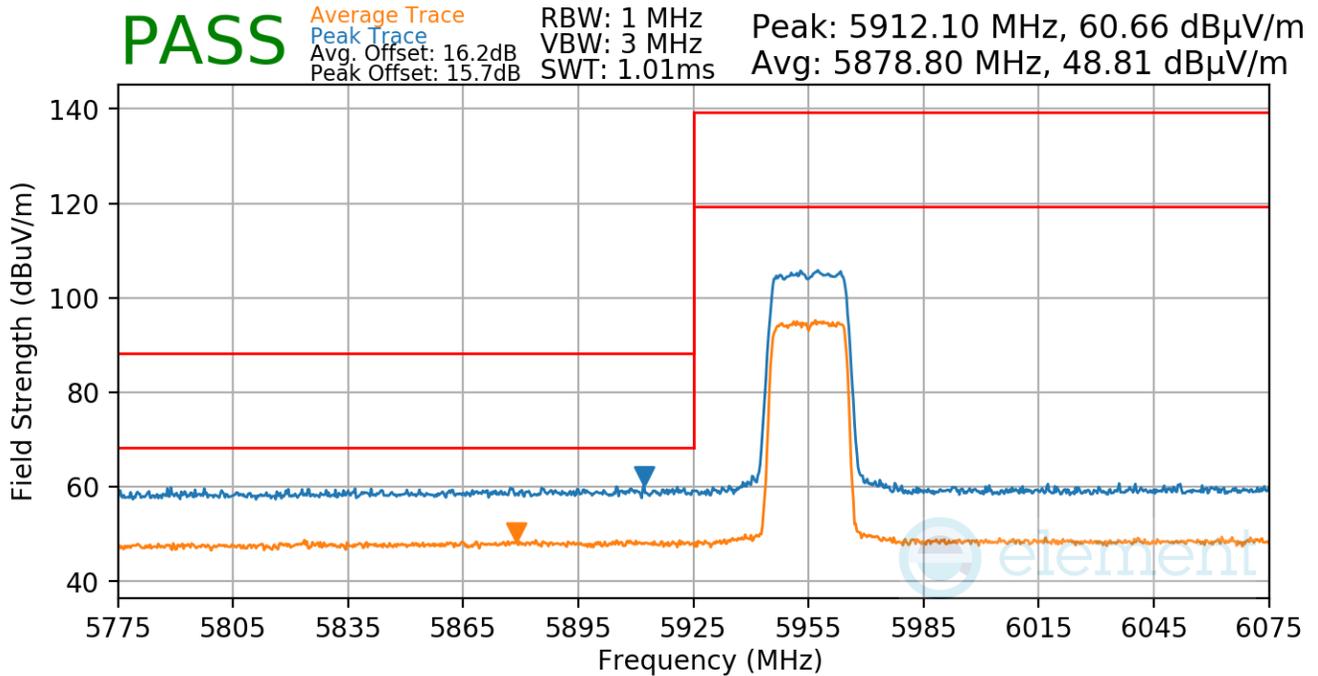


Plot 7-763. Antenna 5b Radiated Lower Band Edge (Peak/Average – UNII Band 5 – RU242)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 267 of 324

V 10.5 12/15/2021

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

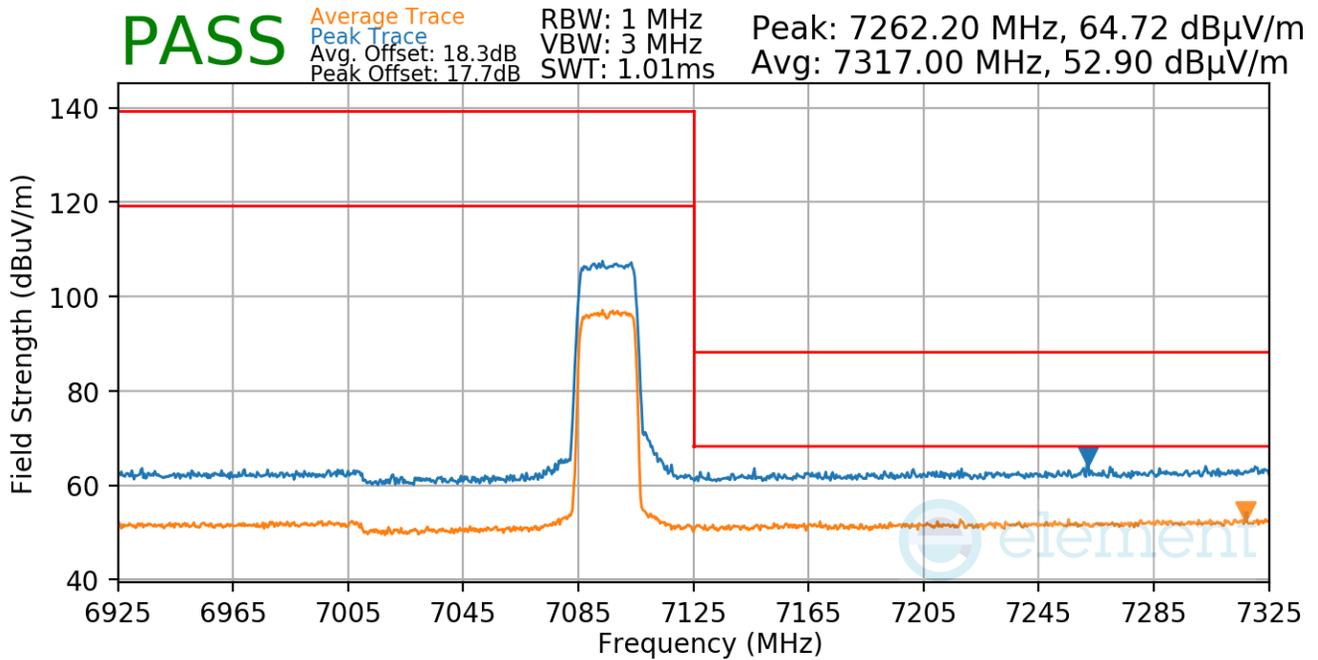


Plot 7-764. Antenna 5b Radiated Lower Band Edge (Peak/Average – UNII Band 8 – RU242)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 268 of 324

7.7.5 Antenna 5b Radiated Band Edge Measurements (40MHz BW)
 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

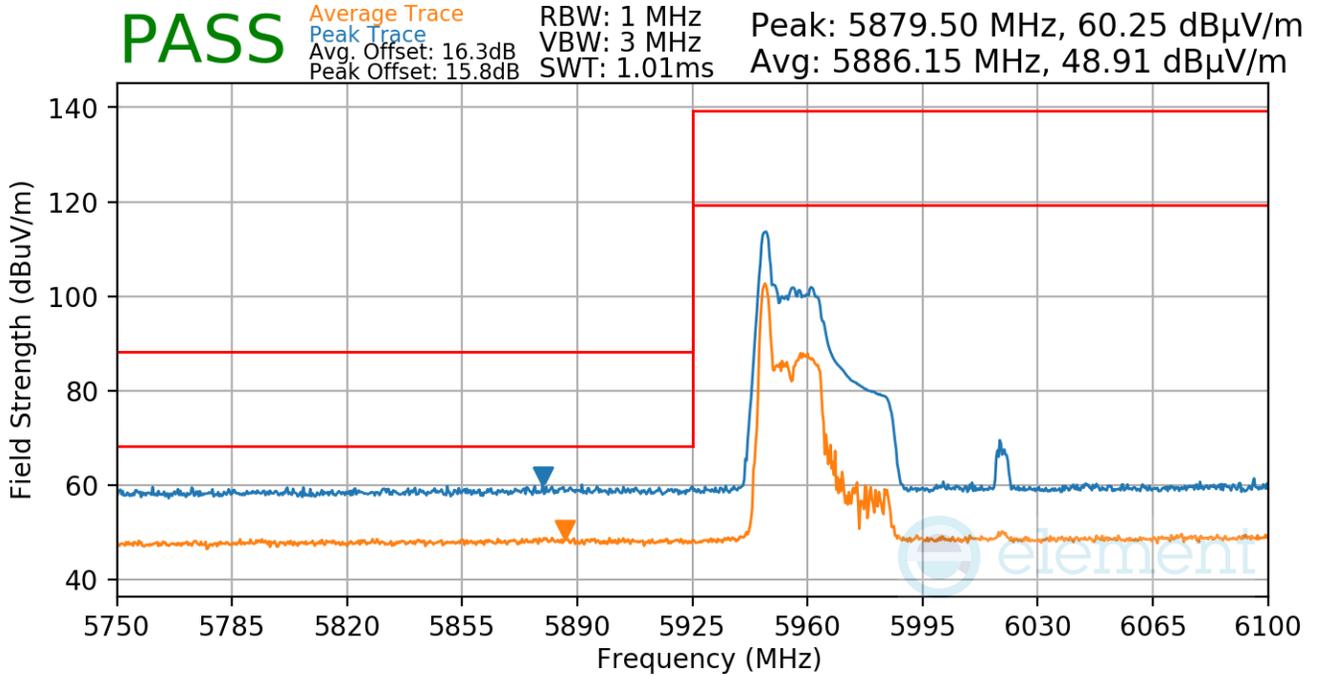

Plot 7-765. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-22-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 269 of 324