


Antenna 5b Radiated Band Edge Measurements (20MHz BW) 7.7.4 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

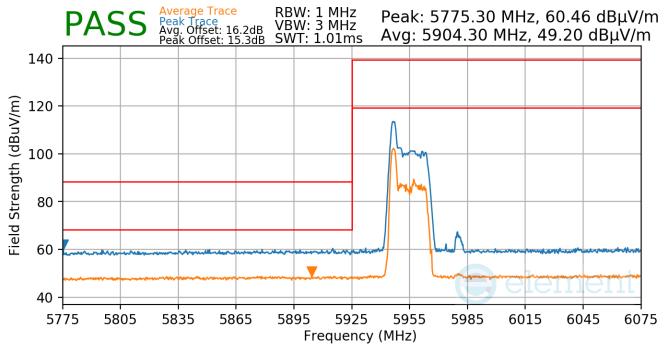


Plot 7-761. Antenna 5b Radiated Lower Band Edge (Peak/Average - UNII Band 5 - RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 265 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 265 of 324
			\/ 10 5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	7095MHz
Channel:	229

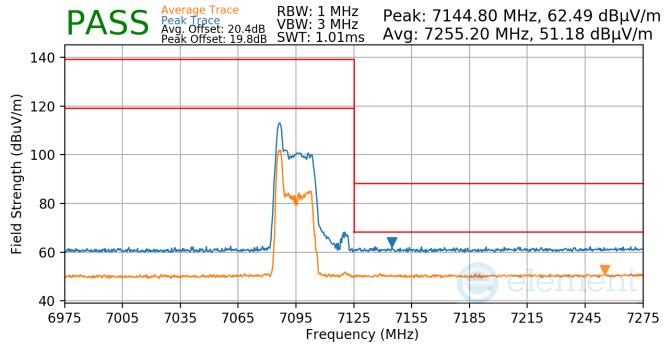


Plot 7-762. Antenna 5b Radiated Lower Band Edge (Peak/Average - UNII Band 8 - RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 266 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 266 of 324
			\/ 10 5 12/15/2021



RU242

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

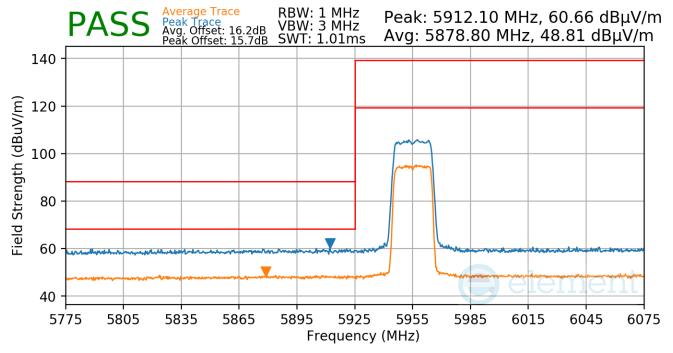


Plot 7-763. Antenna 5b Radiated Lower Band Edge (Peak/Average - UNII Band 5 - RU242)

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 267 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 267 of 324
			V 10.5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	7095MHz
Channel:	229

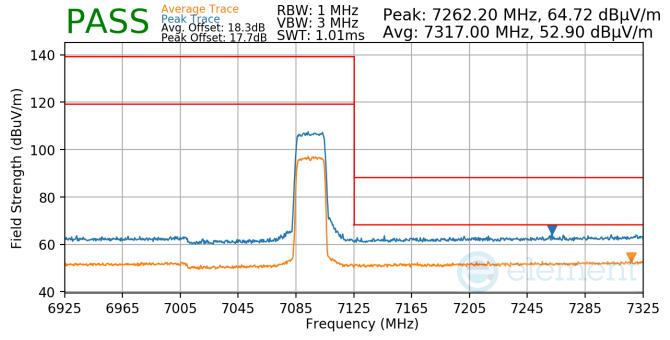

Plot 7-764. Antenna 5b Radiated Lower Band Edge (Peak/Average - UNII Band 8 - RU242)


FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 269 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 268 of 324



7.7.5 Antenna 5b Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

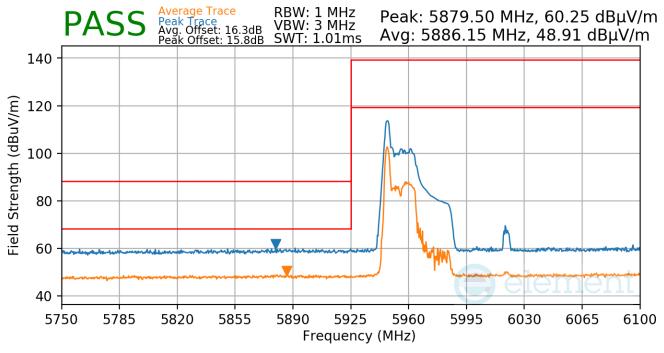


Plot 7-765. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 260 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 269 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7085MHzChannel:227

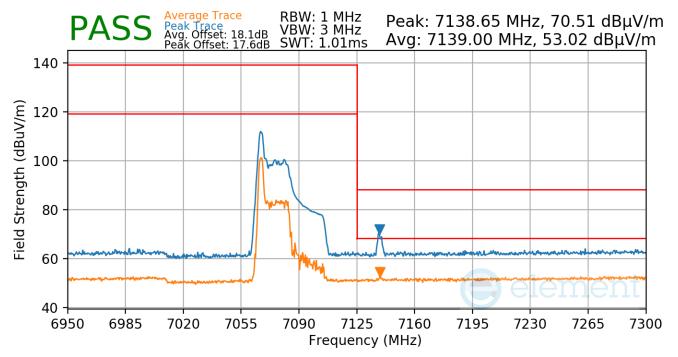


Plot 7-766. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 270 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 270 of 324
			V 10.5 12/15/2021



RU484

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

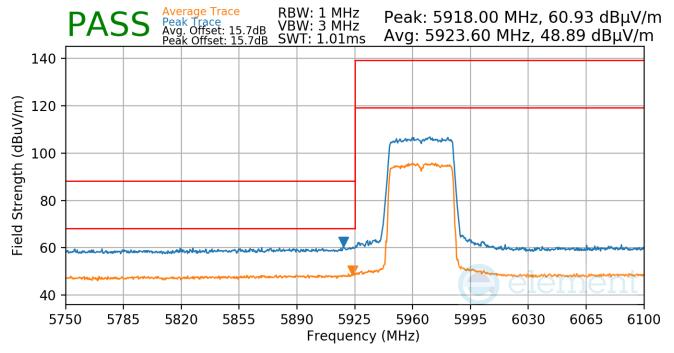


Plot 7-767. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU484)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 274 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 271 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7085MHzChannel:227

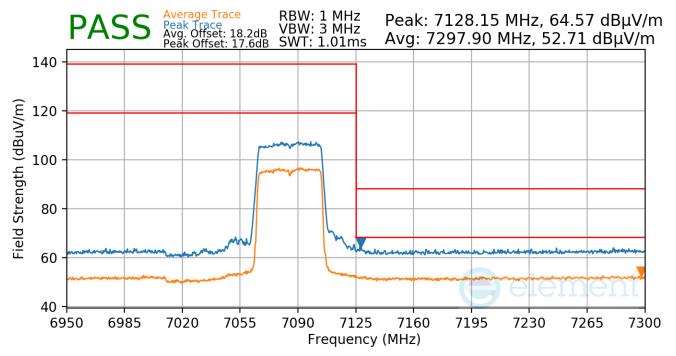

Plot 7-768. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU484)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 070 of 004
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 272 of 324
			V 10.5 12/15/2021



7.7.6 Antenna 5b Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

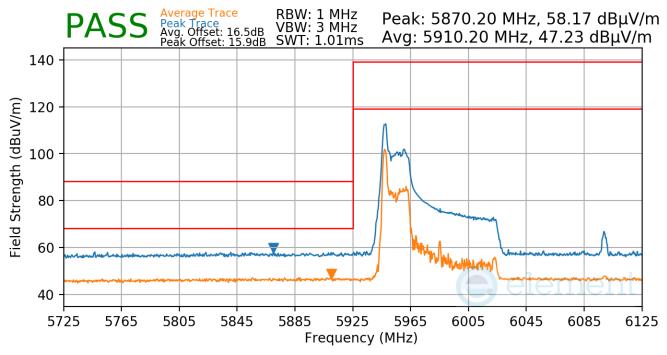


Plot 7-769. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dega 070 of 004
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 273 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7025MHzChannel:215

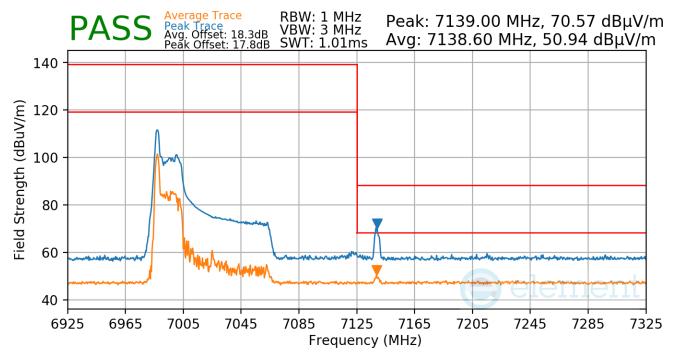


Plot 7-770. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 074 of 204
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 274 of 324
			V 10.5 12/15/2021



RU996

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

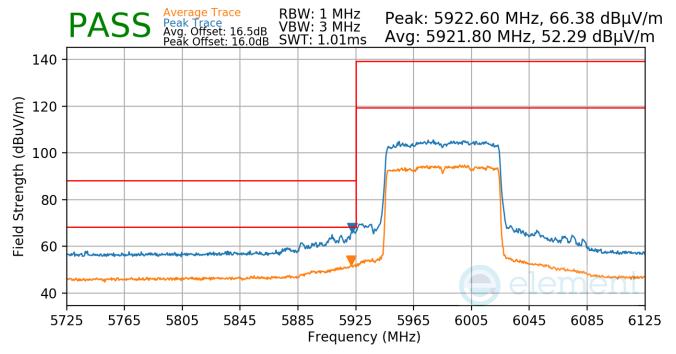


Plot 7-771. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 075 of 004
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 275 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:7025MHzChannel:215

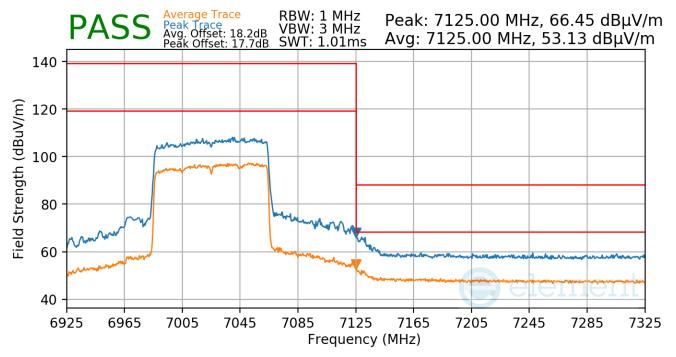

Plot 7-772. Antenna 5b Radiated Lower Band Edge (Peak & Average - UNII Band 8 - RU996)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 276 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 276 of 324
			V 10.5 12/15/2021



7.7.7 Antenna 5b Radiated Band Edge Measurements (160MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

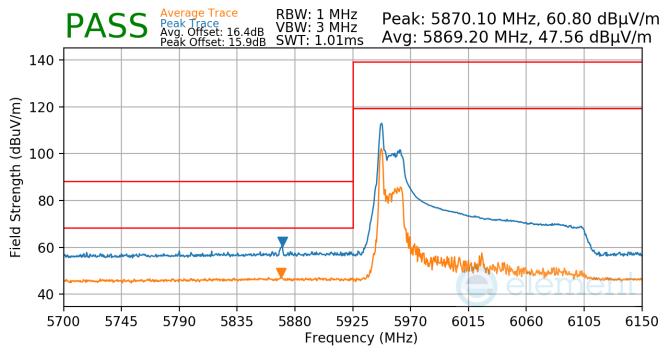


Plot 7-773. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 077 of 004
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 277 of 324
			V 10 5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

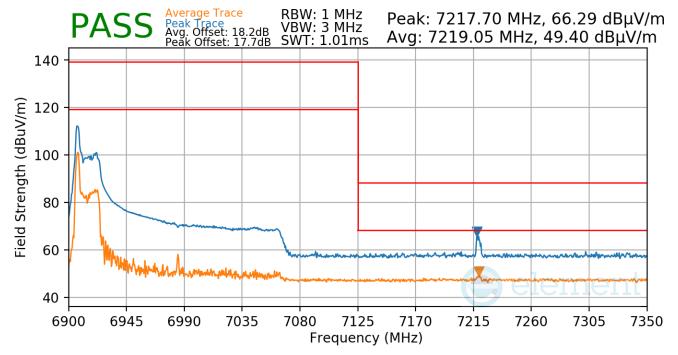


Plot 7-774. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 279 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 278 of 324
			V 10 5 12/15/2021



RU996x2

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

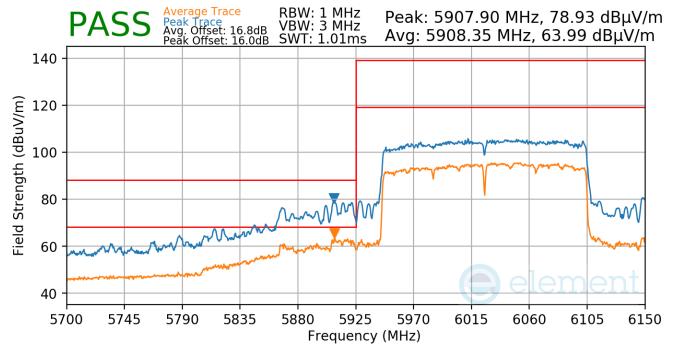


Plot 7-775. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996x2)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 270 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 279 of 324
			V 10.5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

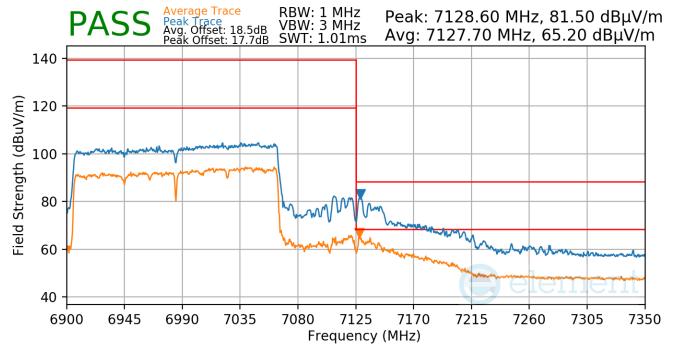

Plot 7-776. Antenna 5b Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU996x2)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 280 of 324
			V 10 5 12/15/2021



Antenna 4a Radiated Band Edge Measurements (20MHz BW) 7.7.8 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

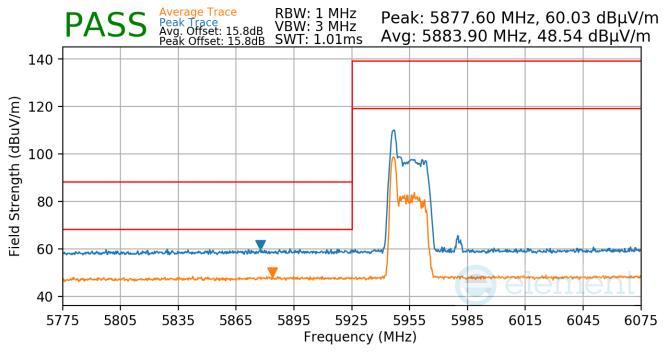


Plot 7-777. Antenna 4a Radiated Lower Band Edge (Peak/Average - UNII Band 5 - RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 201 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 281 of 324
			\/ 10 5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	7095MHz
Channel:	229

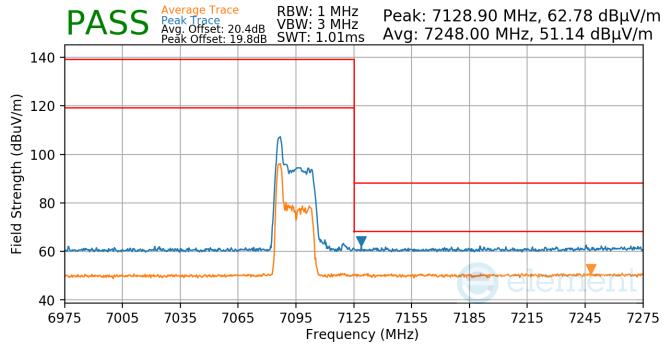


Plot 7-778. Antenna 4a Radiated Lower Band Edge (Peak/Average - UNII Band 8 - RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Daga 202 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 282 of 324
			V/ 10 5 12/15/2021



RU242

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

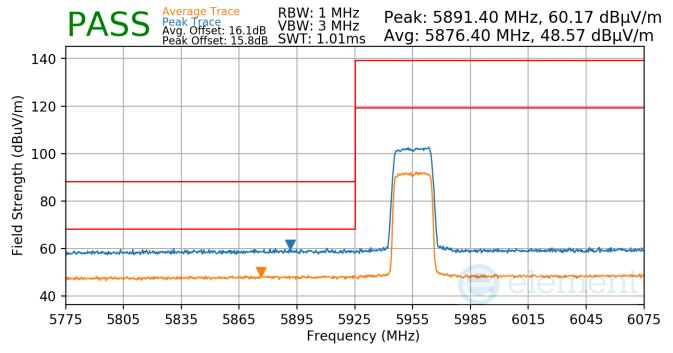


Plot 7-779. Antenna 4a Radiated Lower Band Edge (Peak/Average - UNII Band 5 - RU242)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 202 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 283 of 324
			V 10.5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	7095MHz
Channel:	229

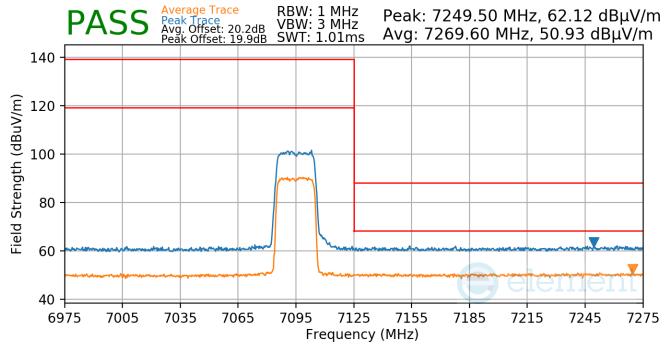

Plot 7-780. Antenna 4a Radiated Lower Band Edge (Peak/Average - UNII Band 8 - RU242)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 204 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 284 of 324
			V/ 10 5 12/15/2021



Antenna 4a Radiated Band Edge Measurements (40MHz BW) 7.7.9 §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

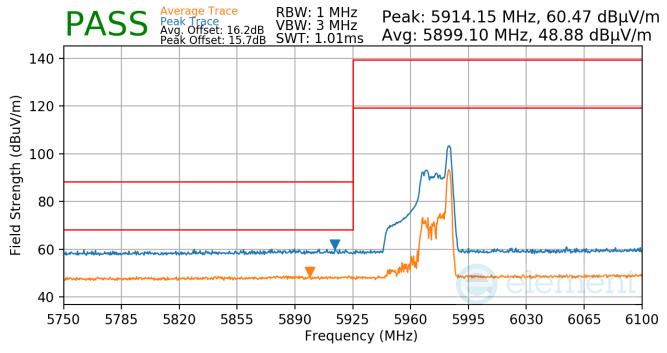


Plot 7-781. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 205 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 285 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:7085MHzChannel:227

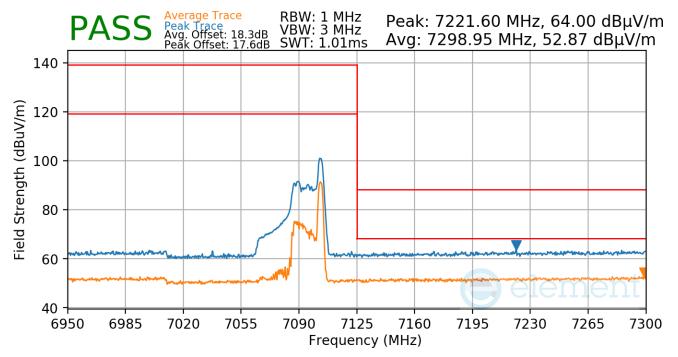


Plot 7-782. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 286 of 324
			V 10 5 12/15/2021



RU484

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS5
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

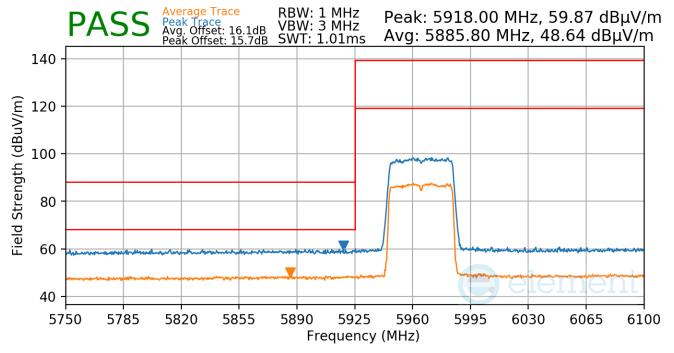


Plot 7-783. Antenna 4a Radiated Lower Band Edge (Peak & Average - UNII Band 5 - RU484)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 207 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 287 of 324
			V 10.5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:7085MHzChannel:227

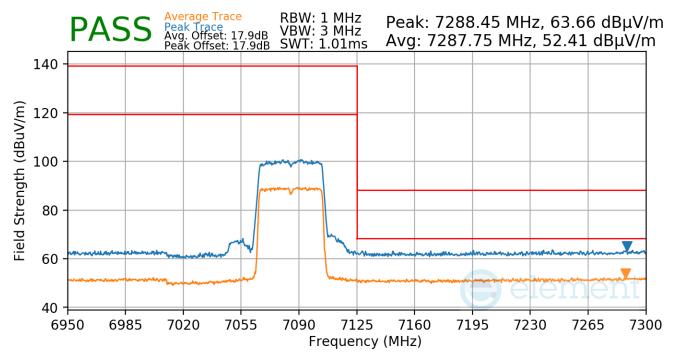

Plot 7-784. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU484)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 288 of 324
			V 10 5 12/15/2021



7.7.10 Antenna 4a Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

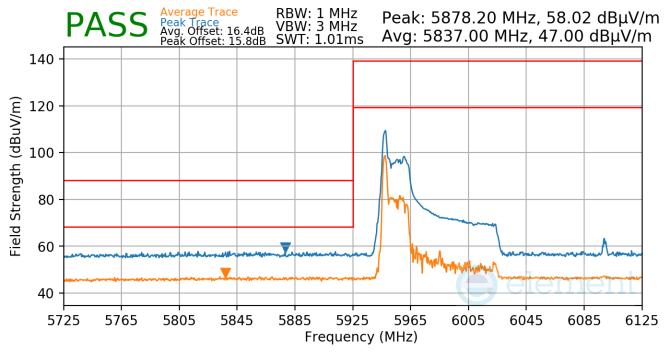


Plot 7-785. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 289 of 324
			\/ 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7025MHzChannel:215

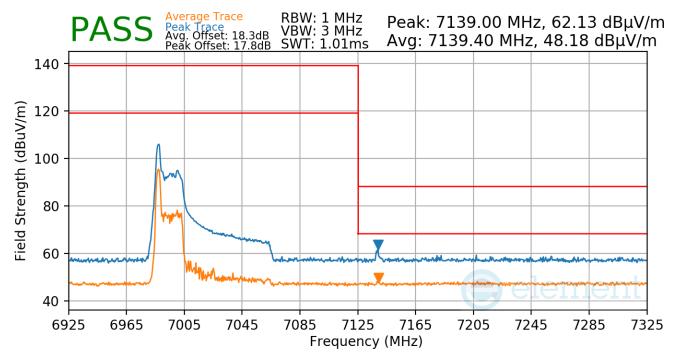


Plot 7-786. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 290 of 324
			V 10.5 12/15/2021



RU996

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

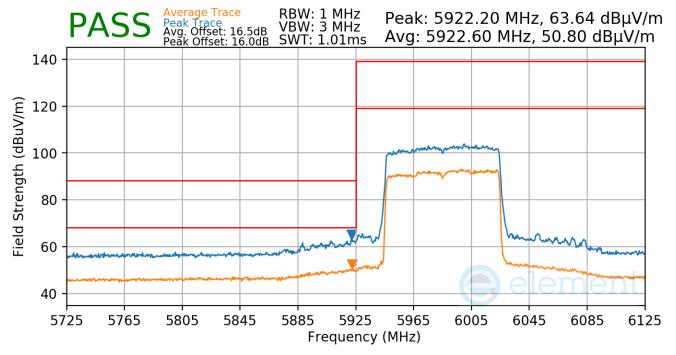


Plot 7-787. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 201 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 291 of 324
			V 10.5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7025MHzChannel:215

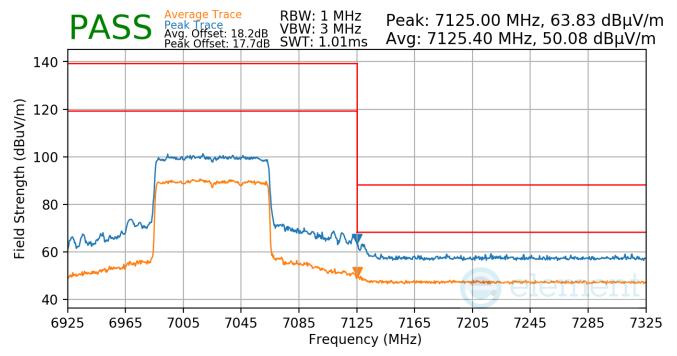

Plot 7-788. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU996)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 202 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 292 of 324
			V 10 5 12/15/2021



7.7.11 Antenna 4a Radiated Band Edge Measurements (160MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

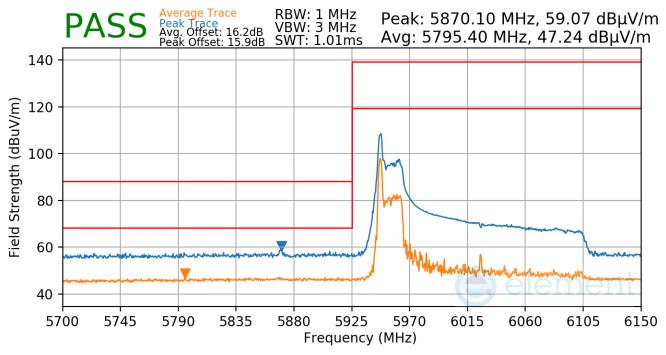


Plot 7-789. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 202 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 293 of 324
			V 10 5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

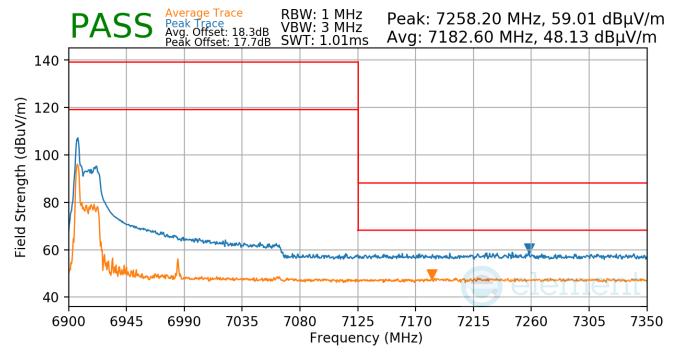


Plot 7-790. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 204 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 294 of 324
			V 10.5 12/15/2021



RU996x2

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

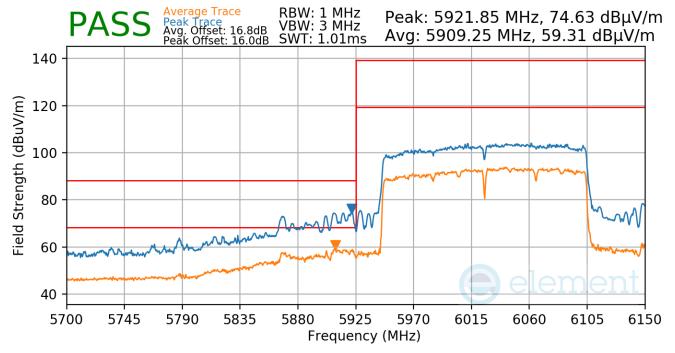


Plot 7-791. Antenna 4a Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996x2)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 205 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 295 of 324
			V 10.5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

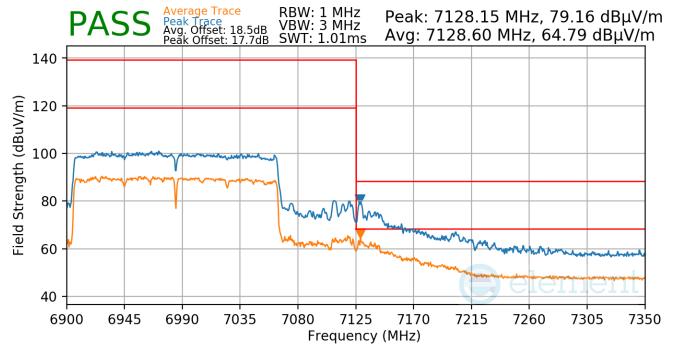

Plot 7-792. Antenna 4a Radiated Lower Band Edge (Peak & Average - UNII Band 8 - RU996x2)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 296 of 324
			V 10 5 12/15/2021



7.7.12 SDM Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

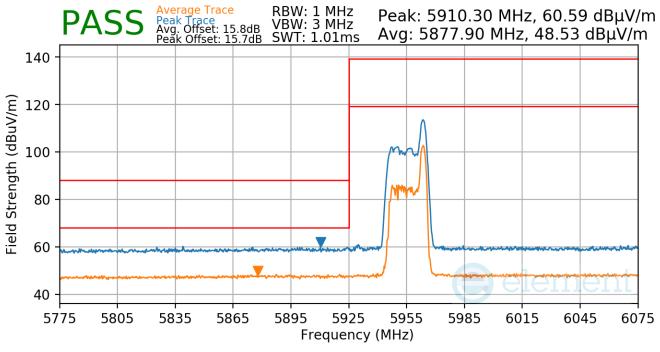


Plot 7-793. SDM Radiated Lower Band Edge (Peak/Average - UNII Band 5 - RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 207 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 297 of 324
			\/ 10 5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	7095MHz
Channel:	229

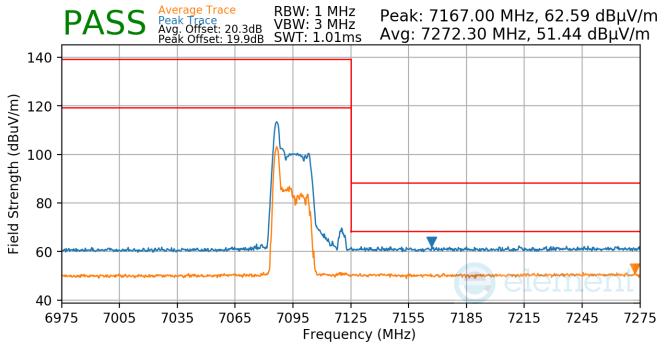


Plot 7-794. SDM Radiated Lower Band Edge (Peak/Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 298 of 324
			V/ 10 5 12/15/2021



RU242

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

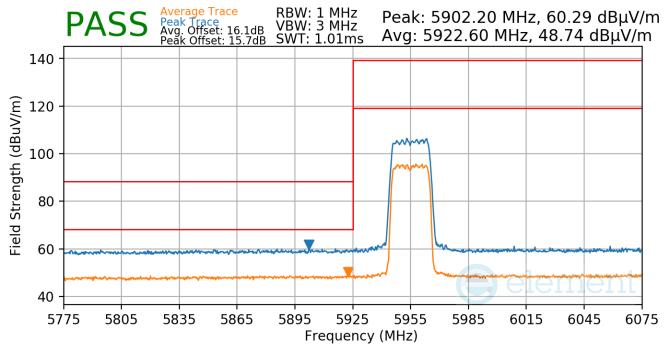


Plot 7-795. SDM Radiated Lower Band Edge (Peak/Average – UNII Band 5 – RU242)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 299 of 324
			V 10 5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	7095MHz
Channel:	229

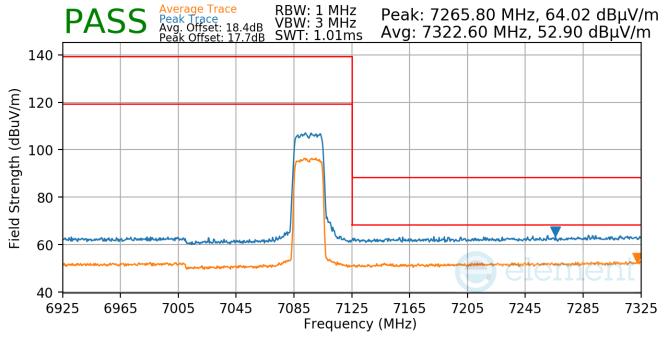

Plot 7-796. SDM Radiated Lower Band Edge (Peak/Average – UNII Band 8 – RU242)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 300 of 324
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	
			V/ 10 E 10/1E/2021



7.7.13 SDM Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

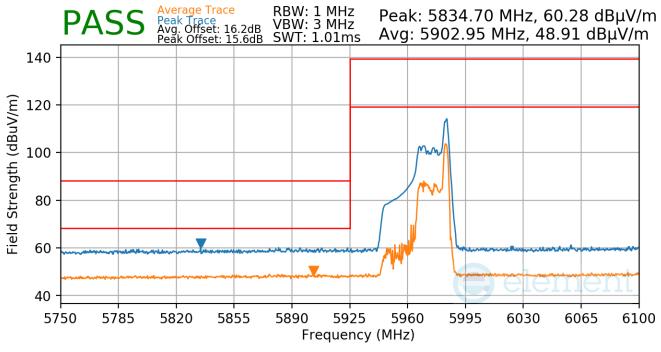


Plot 7-797. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 201 of 201
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 301 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7085MHzChannel:227

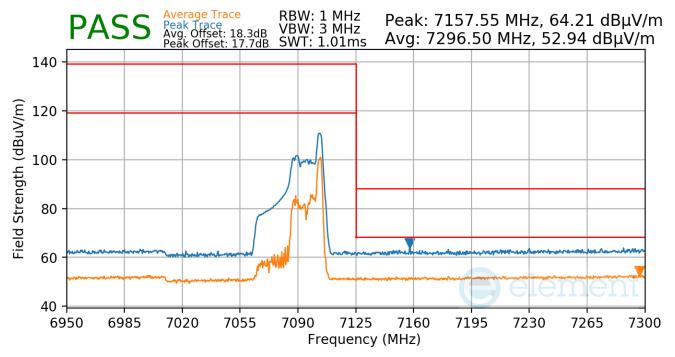


Plot 7-798. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 202 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 302 of 324
			V 10 5 12/15/2021



RU484

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

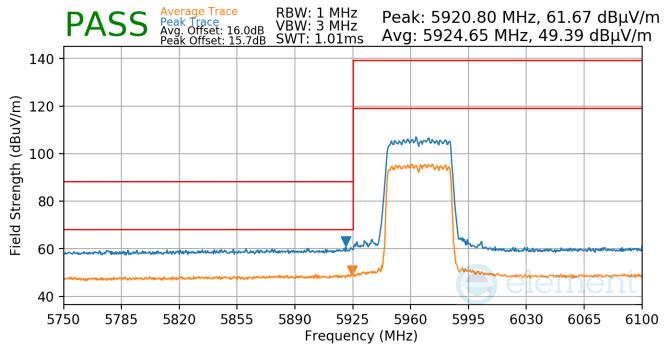


Plot 7-799. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU484)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 202 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 303 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7085MHzChannel:227

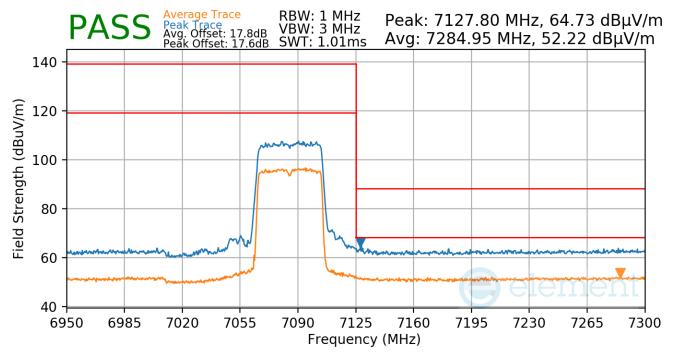

Plot 7-800. SDM Radiated Lower Band Edge (Peak & Average - UNII Band 8 - RU484)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 204 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 304 of 324
			V 10 5 12/15/2021



7.7.14 SDM Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

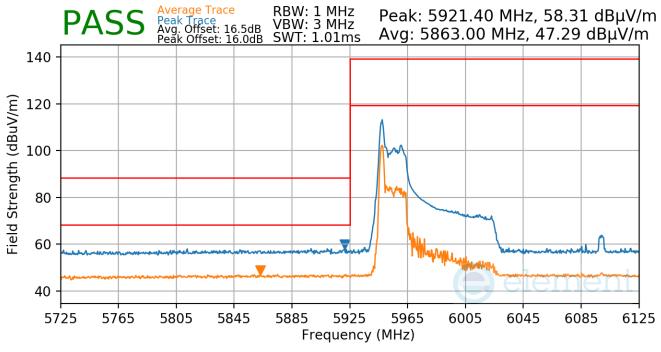


Plot 7-801. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 205 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 305 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7025MHzChannel:215

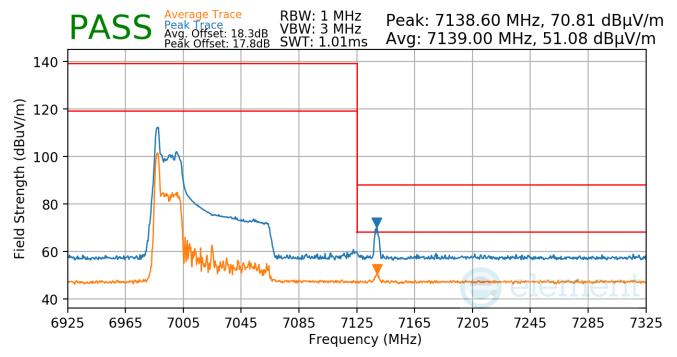


Plot 7-802. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dama 000 at 004
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 306 of 324
			V 10 5 12/15/2021



RU996

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

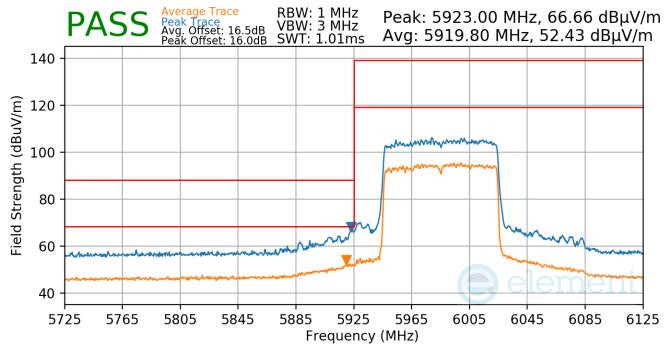


Plot 7-803. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 207 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 307 of 324
			V 10 5 12/15/2021



Worst Case Mode:802.11axWorst Case Transfer Rate:MCS11Distance of Measurements:3 MetersOperating Frequency:7025MHzChannel:215

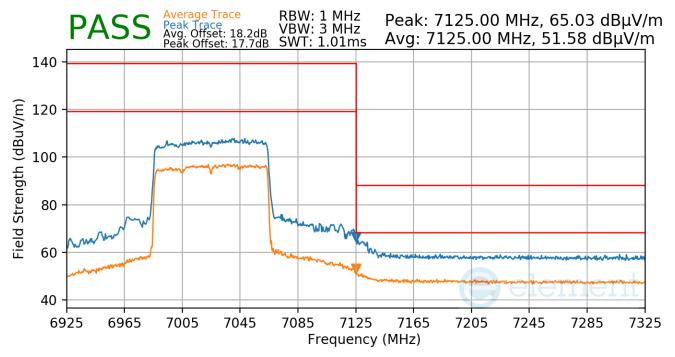

Plot 7-804. SDM Radiated Lower Band Edge (Peak & Average - UNII Band 8 - RU996)


FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dama 000 at 004
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 308 of 324
			V 10 5 12/15/2021



7.7.15 SDM Radiated Band Edge Measurements (160MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU26

802.11ax
MCS11
3 Meters
6025MHz
15

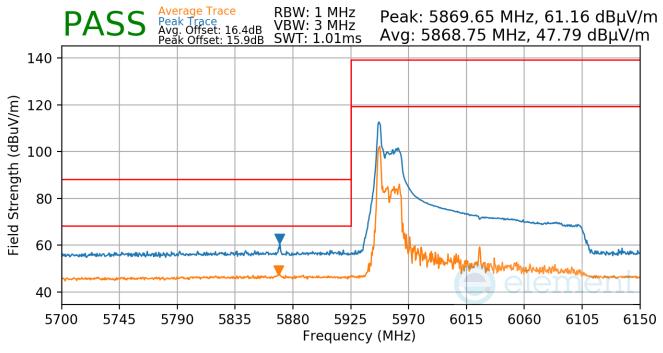


Plot 7-805. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 200 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 309 of 324
			V 10 5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

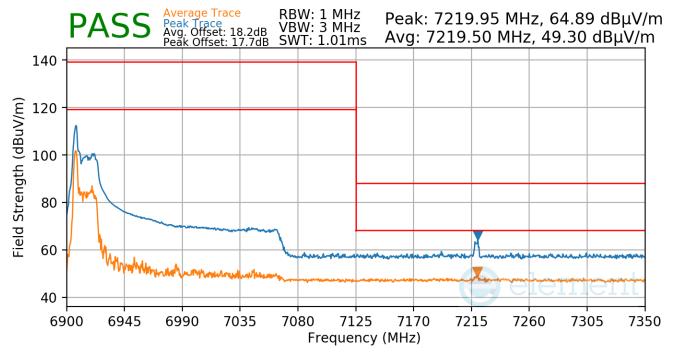


Plot 7-806. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 8 – RU26)

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 210 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 310 of 324
			V 10 5 12/15/2021



RU996x2

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

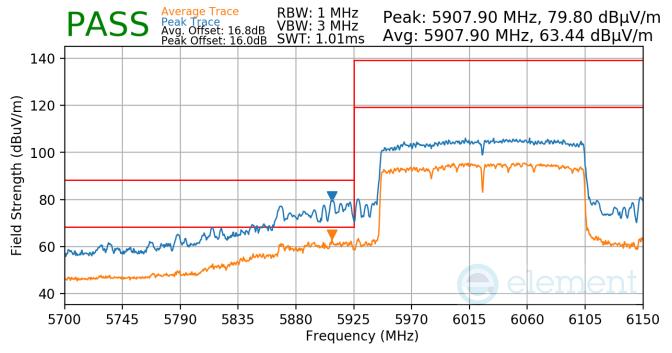


Plot 7-807. SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996x2)

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dega 211 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 311 of 324
			V 10 5 12/15/2021



Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS11
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

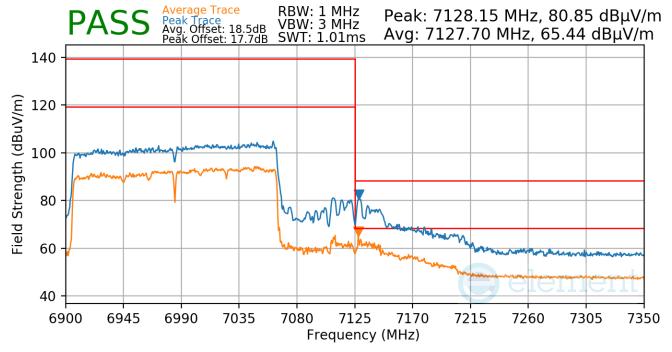

Plot 7-808. SDM Radiated Lower Band Edge (Peak & Average - UNII Band 8 - RU996x2)

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dama 040 at 004
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 312 of 324
			V 10 5 12/15/2021



7.8 Radiated Spurious Emissions – Below 1GHz §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-124 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-124. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. VBW = 300kHz
- 4. Detector = quasi-peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

FCC ID: BCGA2764 IC: 579C-A2764	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 212 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 313 of 324
			V 10.5 12/15/2021



Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



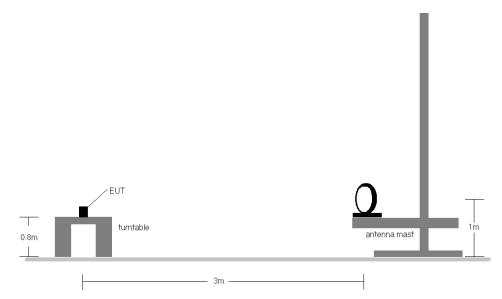


Figure 7-6. Radiated Test Setup < 30MHz



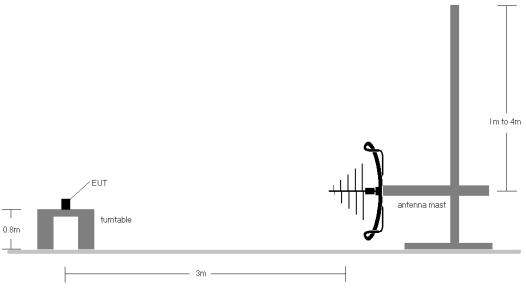

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 214 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 314 of 324
			\/ 10 5 12/15/2021



Test Notes

- 1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-124.
- The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
- 3. This unit was tested with its standard battery.
- 4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR guasi peak detector on emissions that were within 6dB of the limit.
- 5. Emissions were measured at a 3 meter test distance.
- 6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
- 7. No spurious emissions were detected within 20dB of the limit below 30MHz.
- 8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
- 9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
- 10. All antenna configurations were investigated and only the worst case is reported.
- 11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations

Determining Spurious Emissions Levels

- \circ Field Strength Level [dB_µV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] Preamp Gain [dB]
- Margin [dB] = Field Strength Level $[dB_{\mu}V/m]$ Limit $[dB_{\mu}V/m]$

FCC ID: BCGA2764 IC: 579C-A2764	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 245 of 224
1C2205090028-22-R4.BCG	5/30/2022 - 9/16/2022	Tablet Device	Page 315 of 324
			V 10.5 12/15/2021