

Figure 65 - Core 0 (A) 2480 MHz (CH78) 20 dB Bandwidth

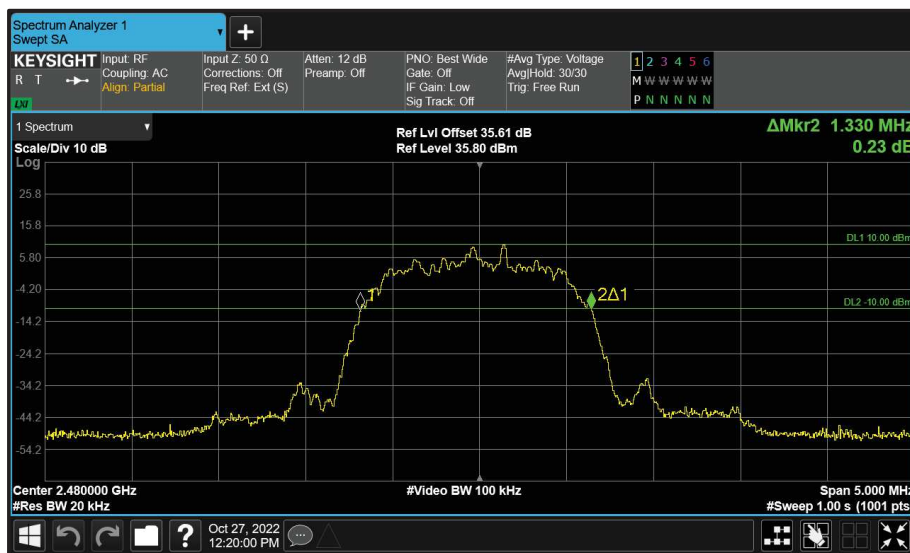


Figure 66 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.265	1.255	-	-
2441	1.260	1.260	-	-
2480	1.260	1.260	-	-

Table 44 - 20 dB Bandwidth Results



Figure 67 - Core 0 (A) 2402 MHz (CH0) 20 dB Bandwidth

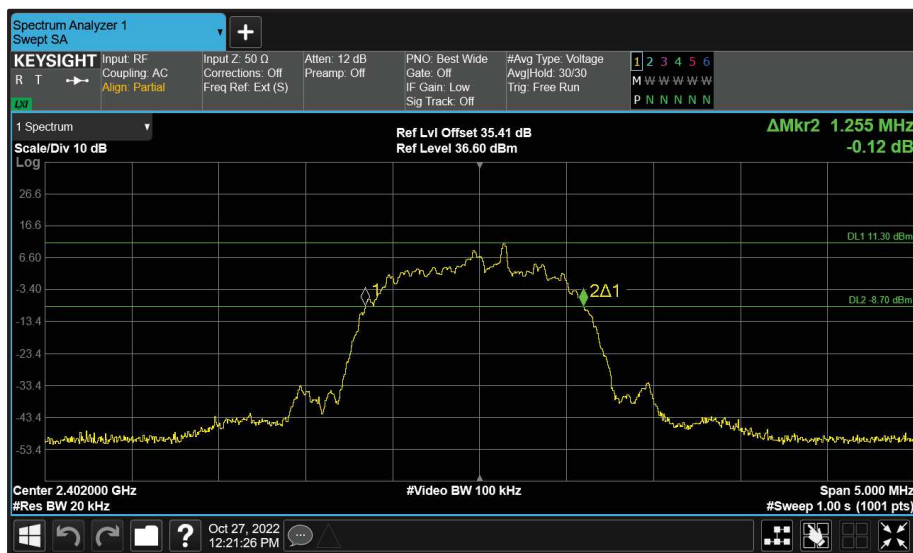


Figure 68 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

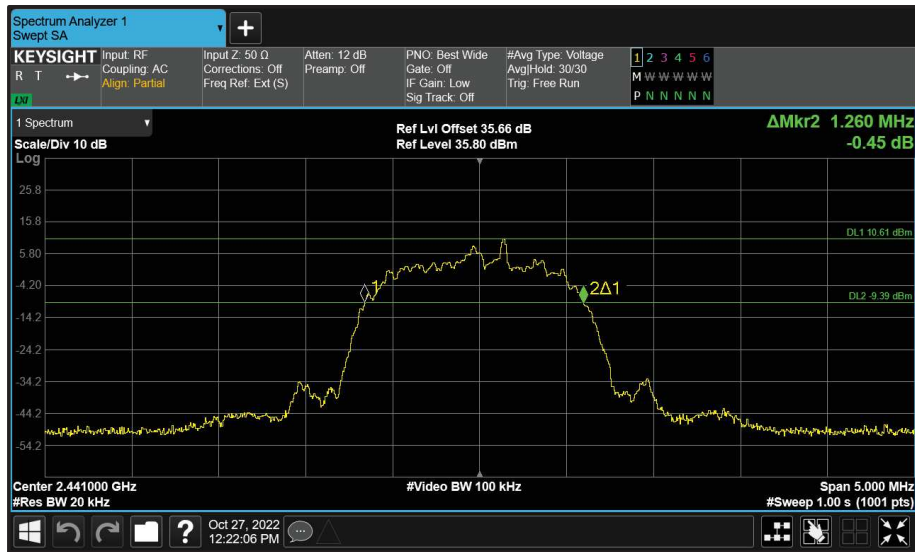


Figure 69 - Core 0 (A) 2441 MHz (CH39) 20 dB Bandwidth



Figure 70 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

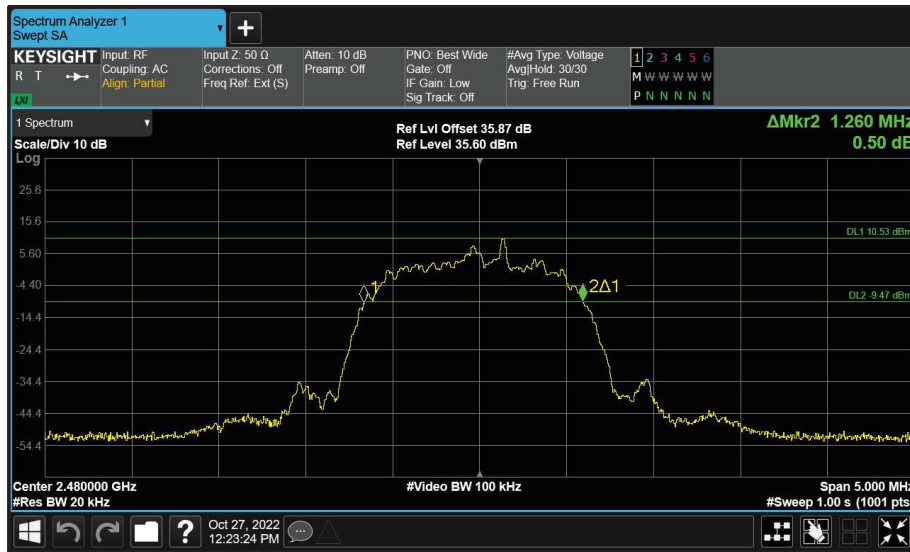


Figure 71 - Core 0 (A) 2480 MHz (CH78) 20 dB Bandwidth



Figure 72 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	0.855	-	-
2441	-	0.858	-	-
2480	-	0.858	-	-

Table 45 - 20 dB Bandwidth Results

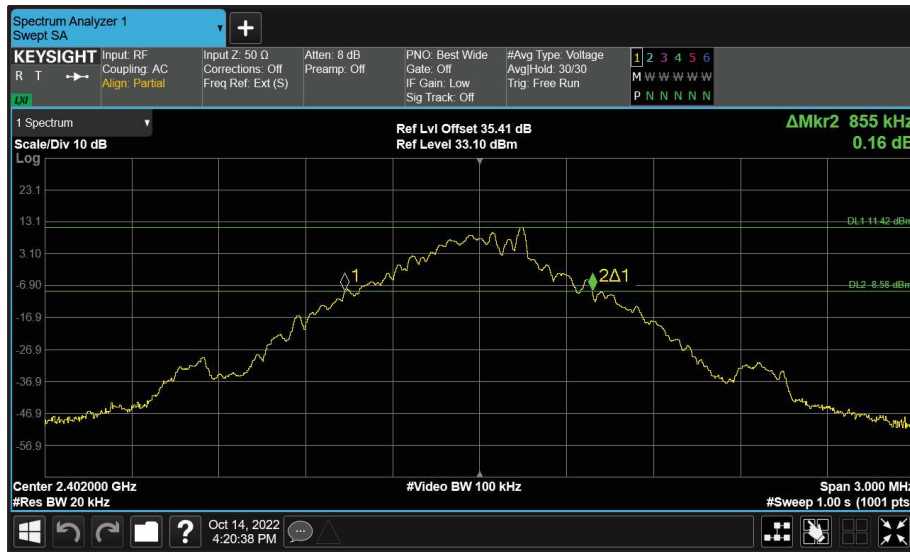


Figure 73 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth



Figure 74 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

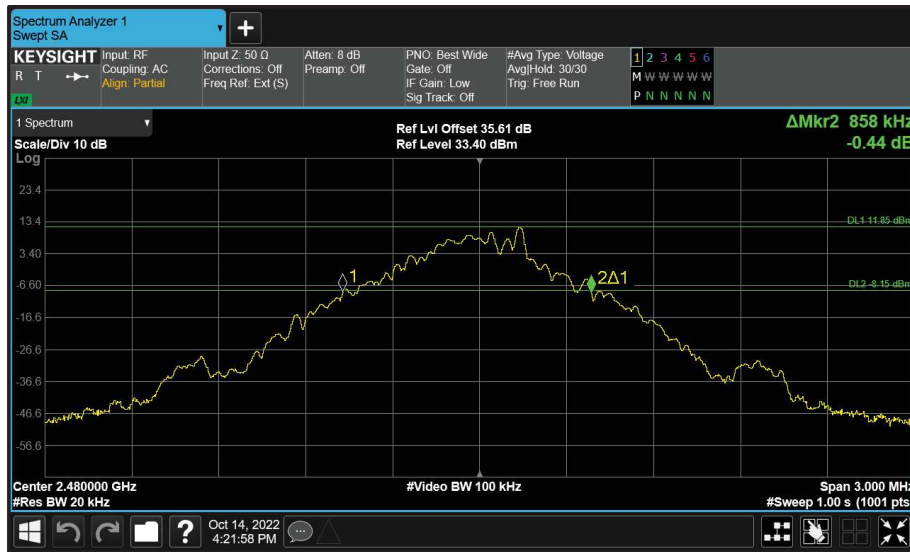


Figure 75 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	-	0.855	-
2441	-	-	0.855	-
2480	-	-	0.855	-

Table 46 - 20 dB Bandwidth Results

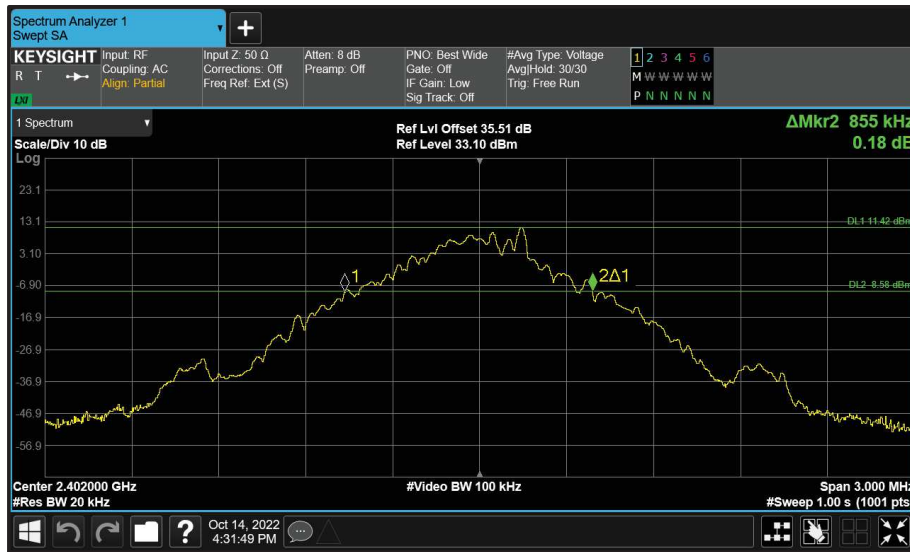


Figure 76 - BT Dedicated (C) 2402 MHz (CH0) 20 dB Bandwidth

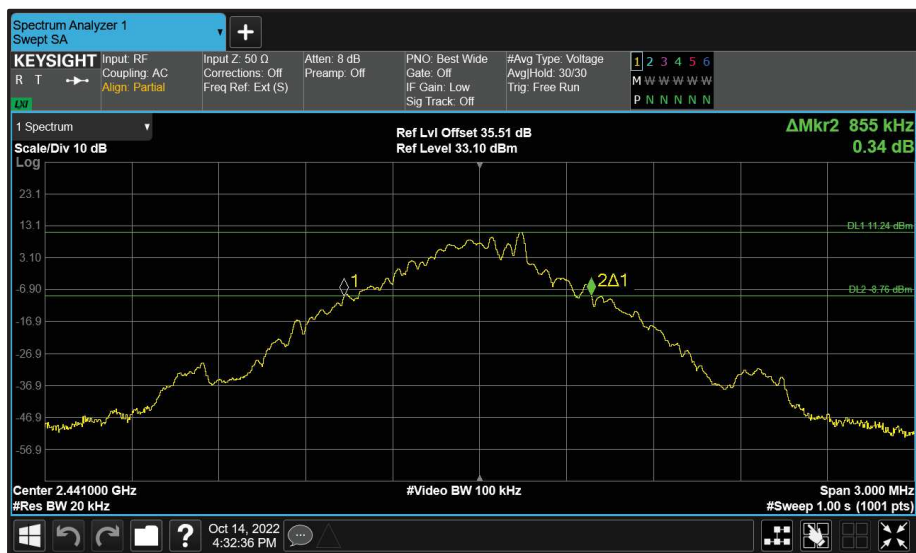


Figure 77 - BT Dedicated (C) 2441 MHz (CH39) 20 dB Bandwidth

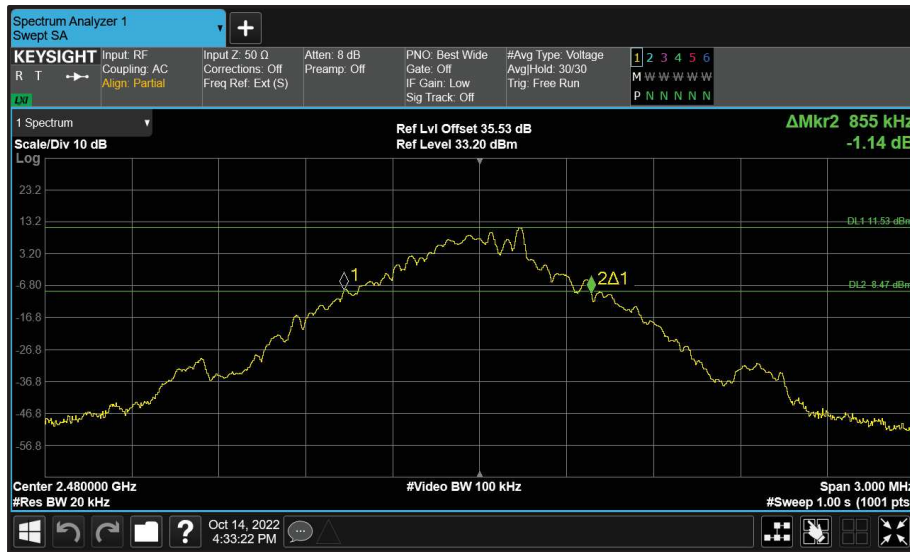


Figure 78 - BT Dedicated (C) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	0.858	0.855	-	-
2441	0.858	0.858	-	-
2480	0.858	0.855	-	-

Table 47 - 20 dB Bandwidth Results

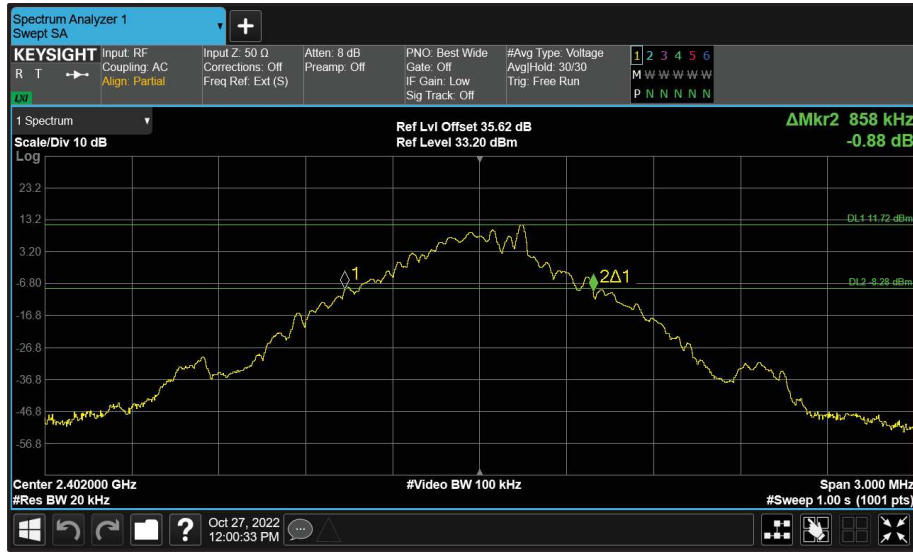


Figure 79 - Core 0 (A) 2402 MHz (CH0) 20 dB Bandwidth

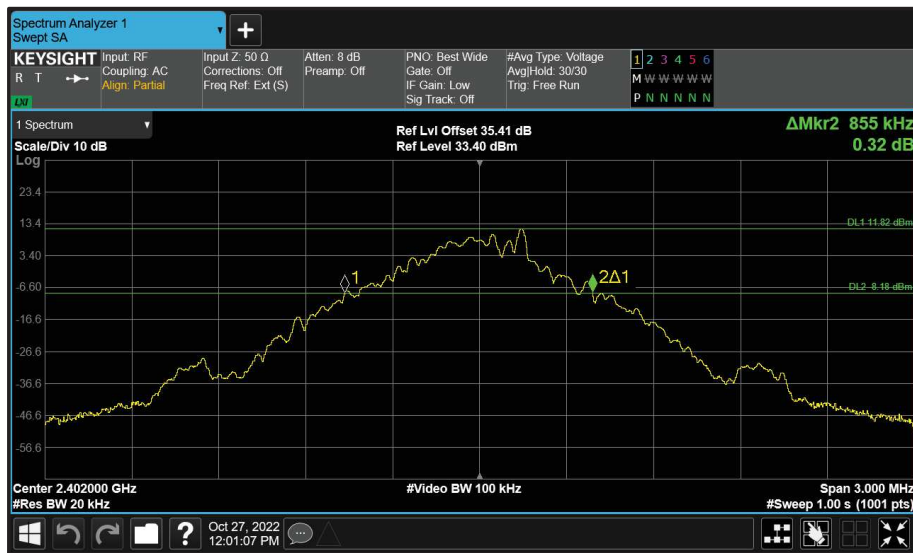


Figure 80 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

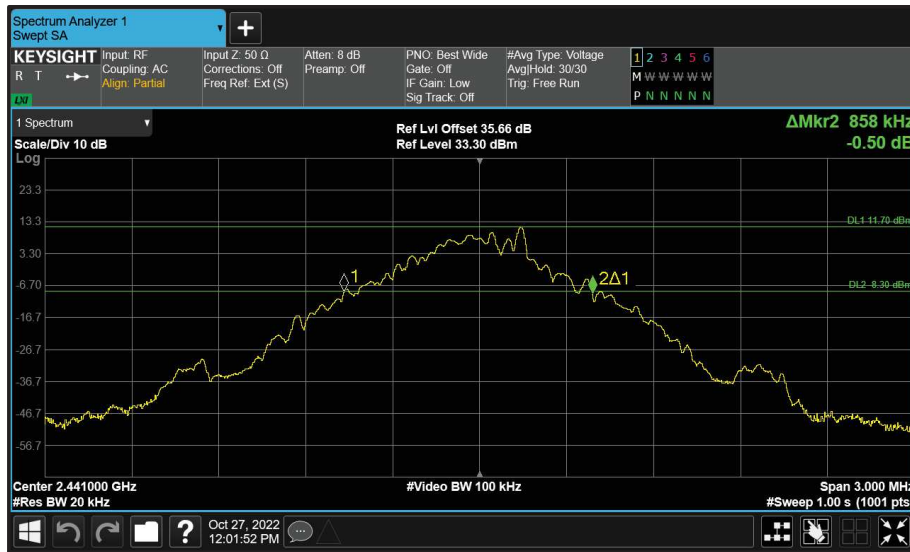


Figure 81 - Core 0 (A) 2441 MHz (CH39) 20 dB Bandwidth



Figure 82 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

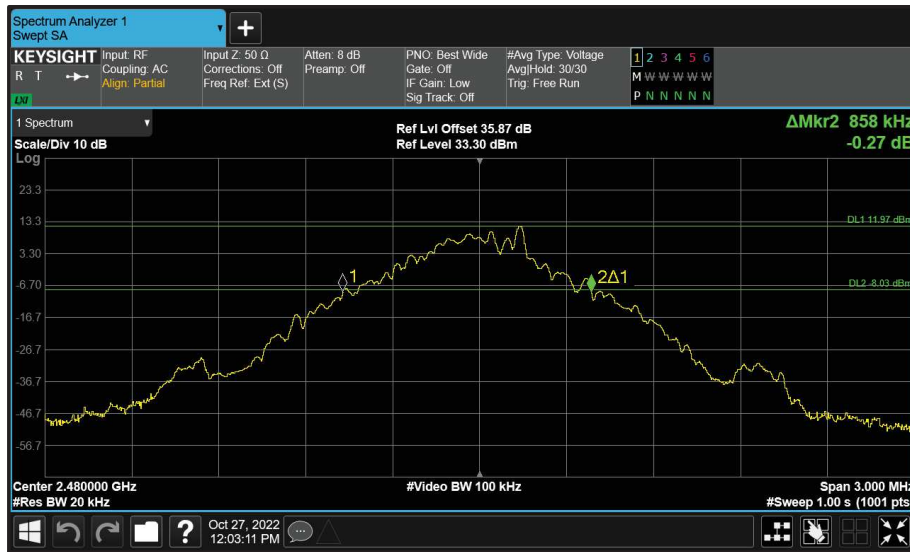


Figure 83 - Core 0 (A) 2480 MHz (CH78) 20 dB Bandwidth



Figure 84 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	1.325	-	-
2441	-	1.330	-	-
2480	-	1.325	-	-

Table 48 - 20 dB Bandwidth Results

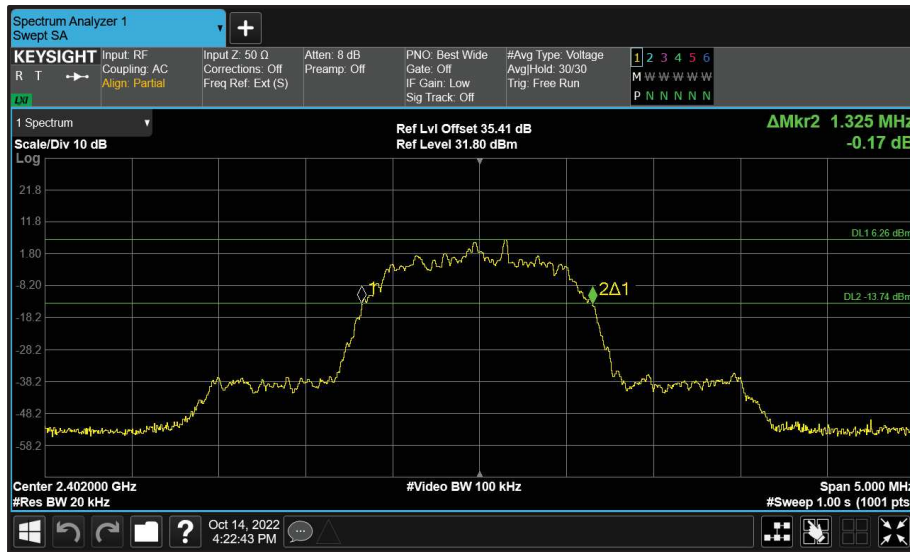


Figure 85 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

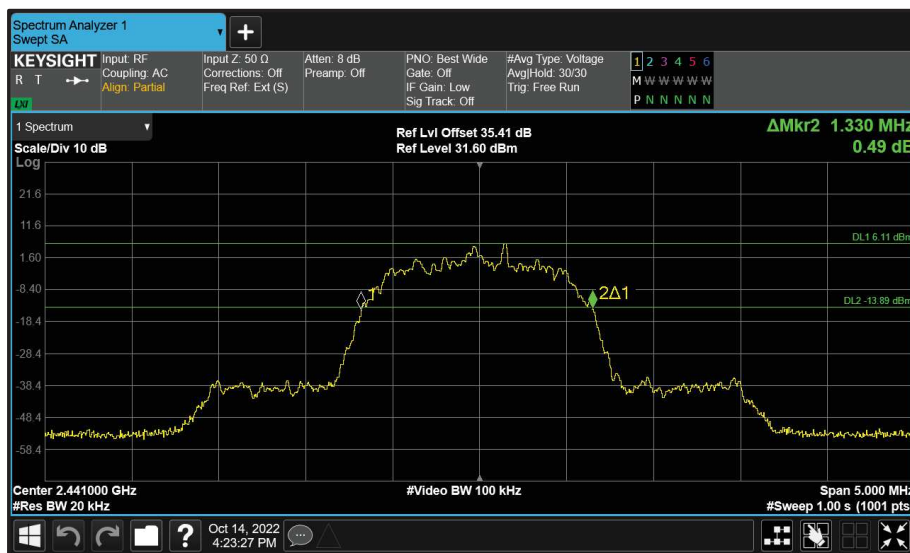


Figure 86 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth



Figure 87 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	1.260	-	-
2441	-	1.265	-	-
2480	-	1.260	-	-

Table 49 - 20 dB Bandwidth Results

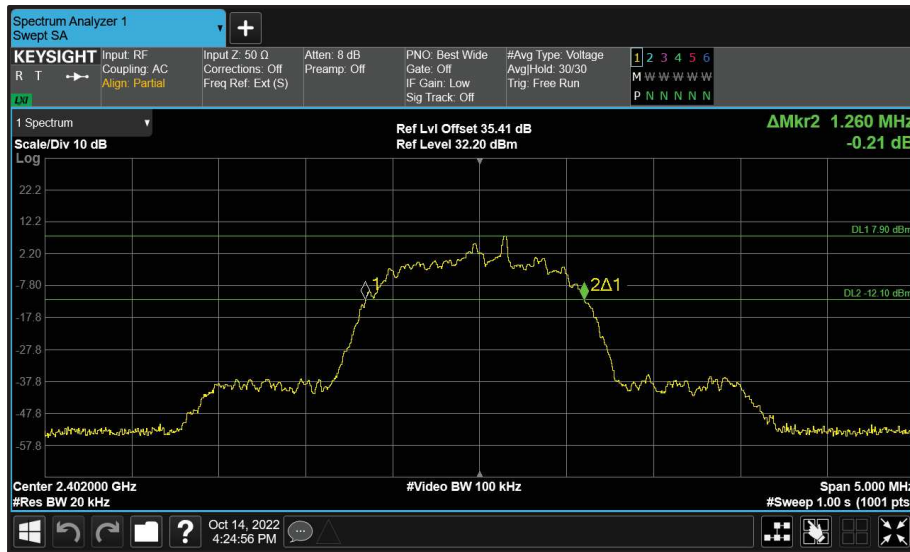


Figure 88 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

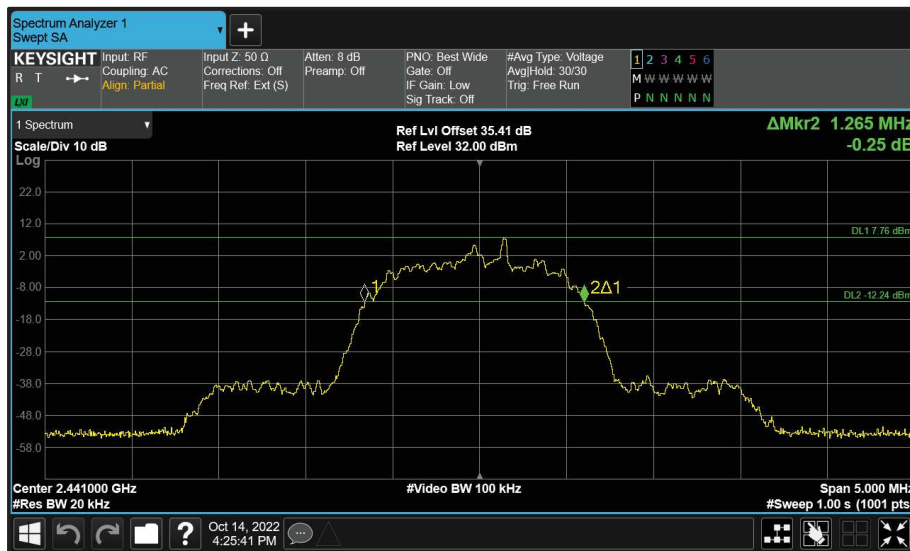


Figure 89 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

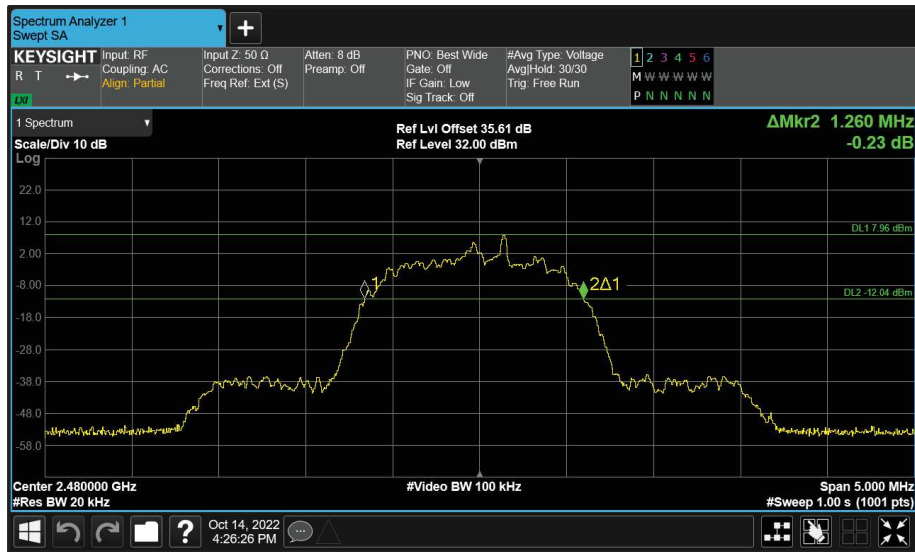


Figure 90 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	-	1.325	-
2441	-	-	1.330	-
2480	-	-	1.325	-

Table 50 - 20 dB Bandwidth Results



Figure 91 - BT Dedicated (C) 2402 MHz (CH0) 20 dB Bandwidth

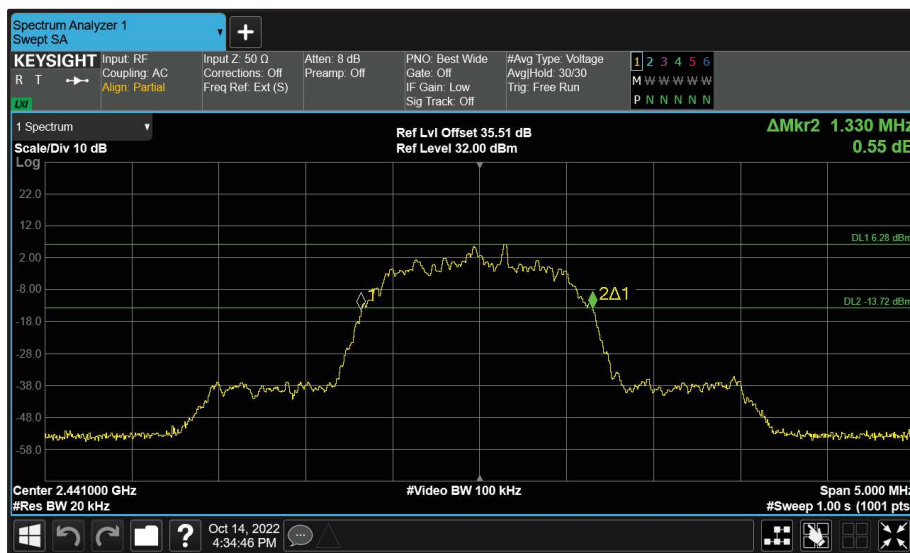


Figure 92 - BT Dedicated (C) 2441 MHz (CH39) 20 dB Bandwidth

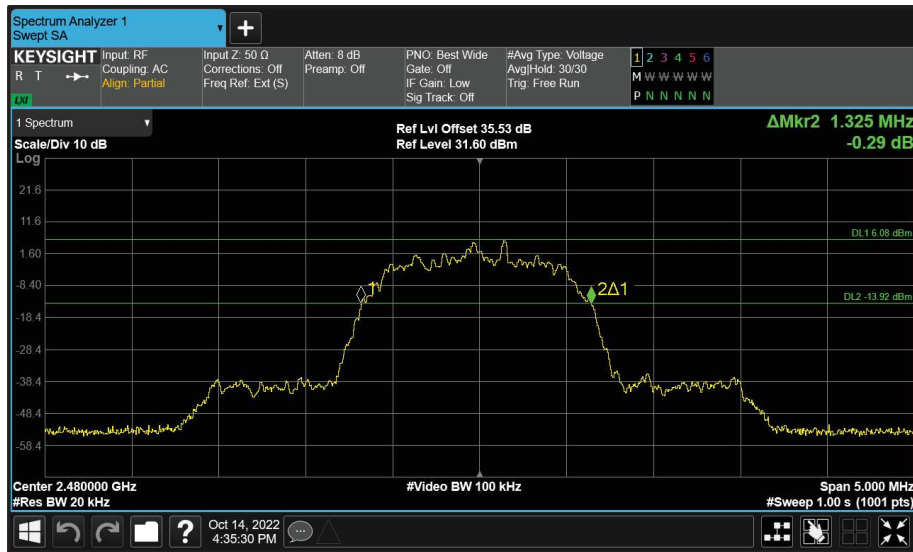


Figure 93 - BT Dedicated (C) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	-	1.260	-
2441	-	-	1.265	-
2480	-	-	1.260	-

Table 51 - 20 dB Bandwidth Results

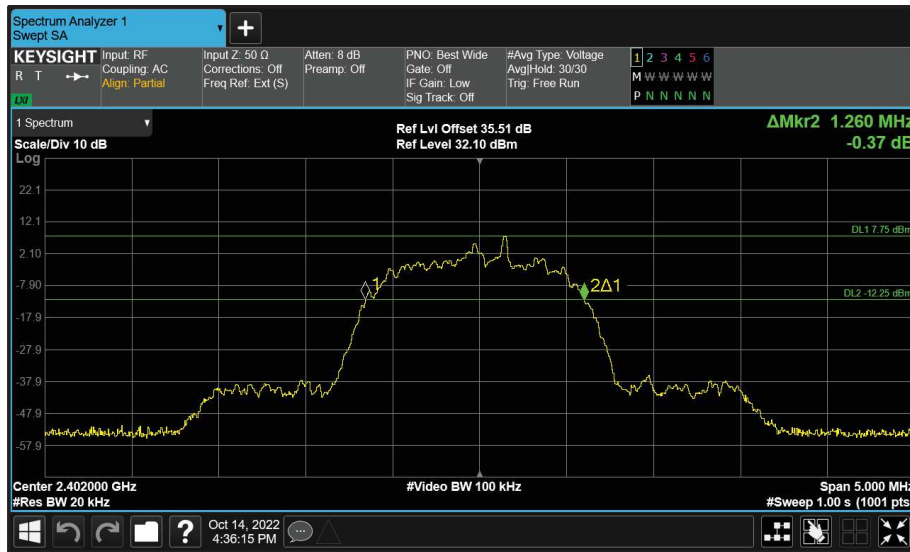


Figure 94 - BT Dedicated (C) 2402 MHz (CH0) 20 dB Bandwidth

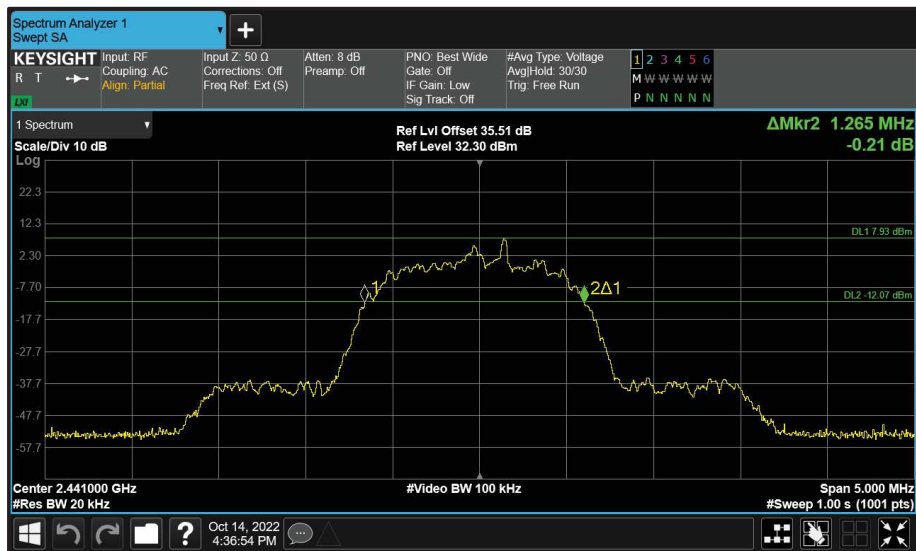


Figure 95 - BT Dedicated (C) 2441 MHz (CH39) 20 dB Bandwidth

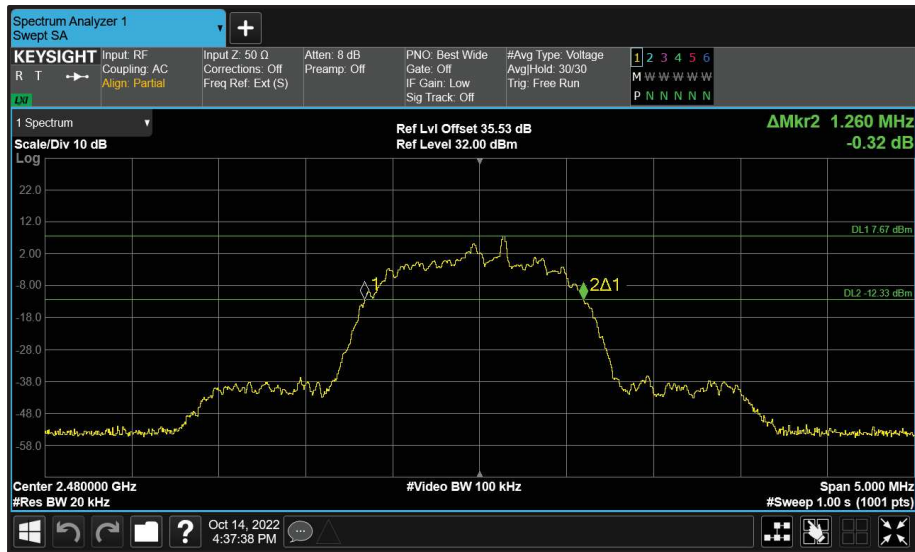


Figure 96 - BT Dedicated (C) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.325	1.325	-	-
2441	1.330	1.330	-	-
2480	1.325	1.325	-	-

Table 52 - 20 dB Bandwidth Results

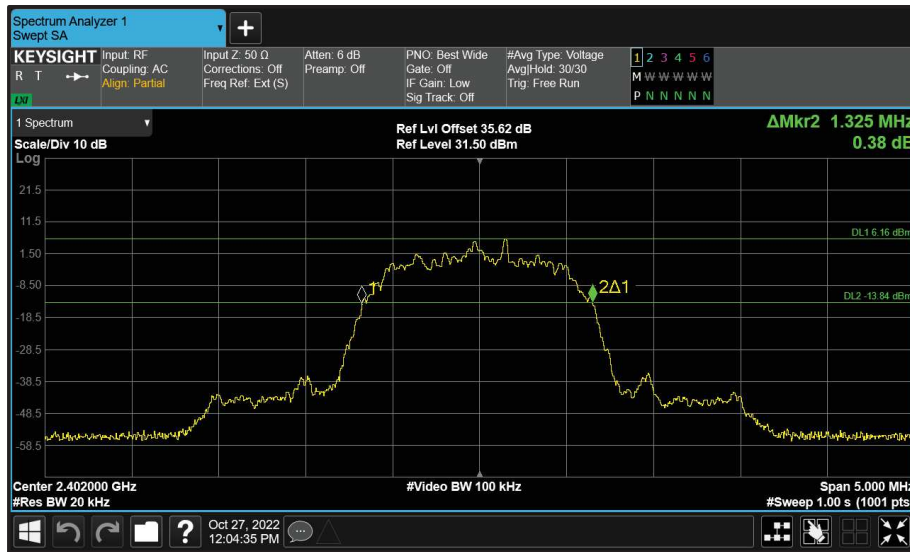


Figure 97 - Core 0 (A) 2402 MHz (CH0) 20 dB Bandwidth



Figure 98 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

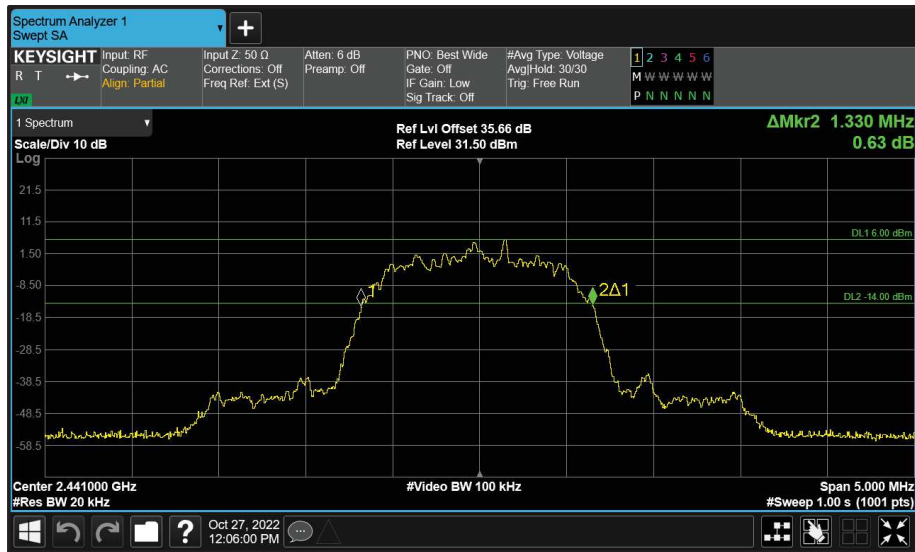


Figure 99 - Core 0 (A) 2441 MHz (CH39) 20 dB Bandwidth

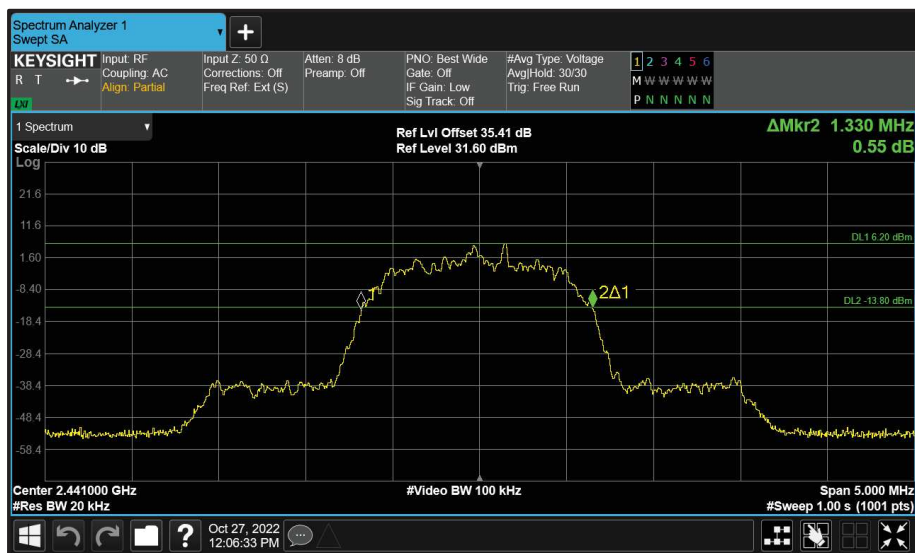


Figure 100 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

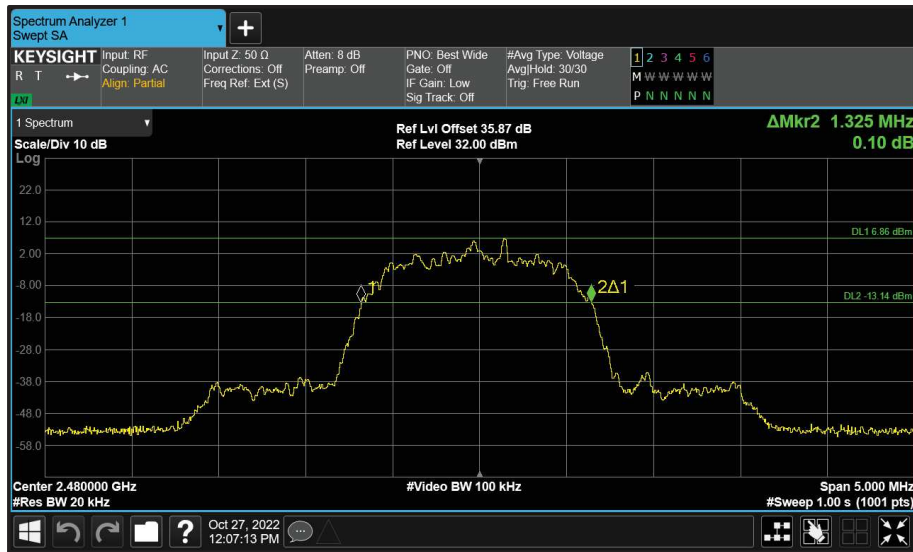


Figure 101 - Core 0 (A) 2480 MHz (CH78) 20 dB Bandwidth

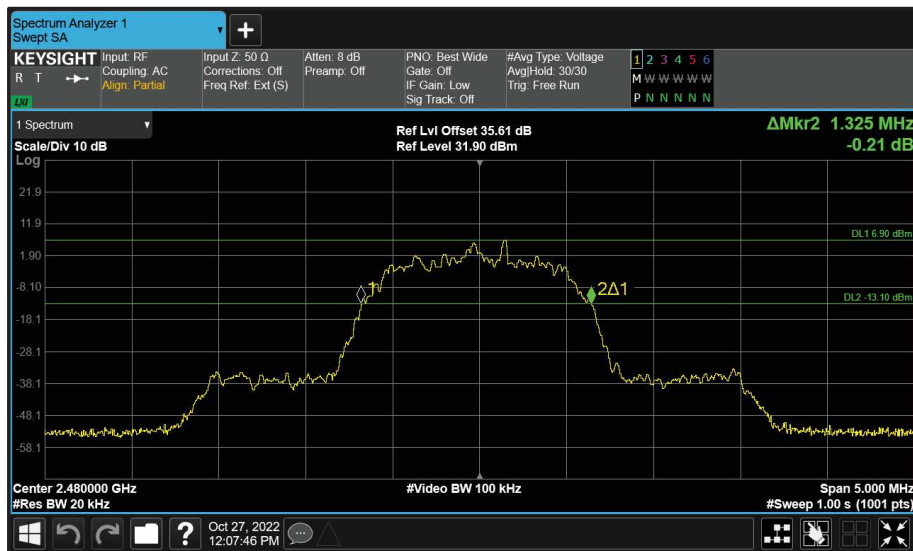


Figure 102 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.260	1.260	-	-
2441	1.265	1.265	-	-
2480	1.260	1.260	-	-

Table 53 - 20 dB Bandwidth Results

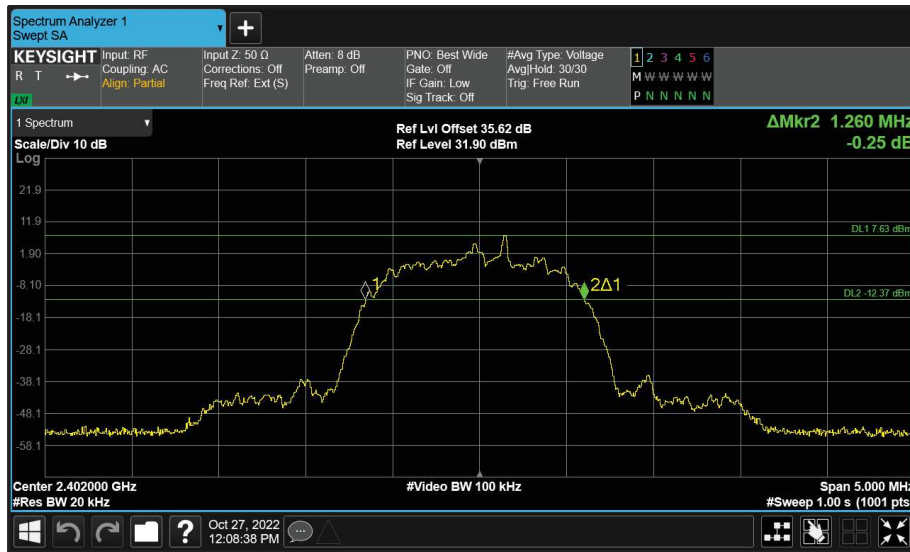


Figure 103 - Core 0 (A) 2402 MHz (CH0) 20 dB Bandwidth

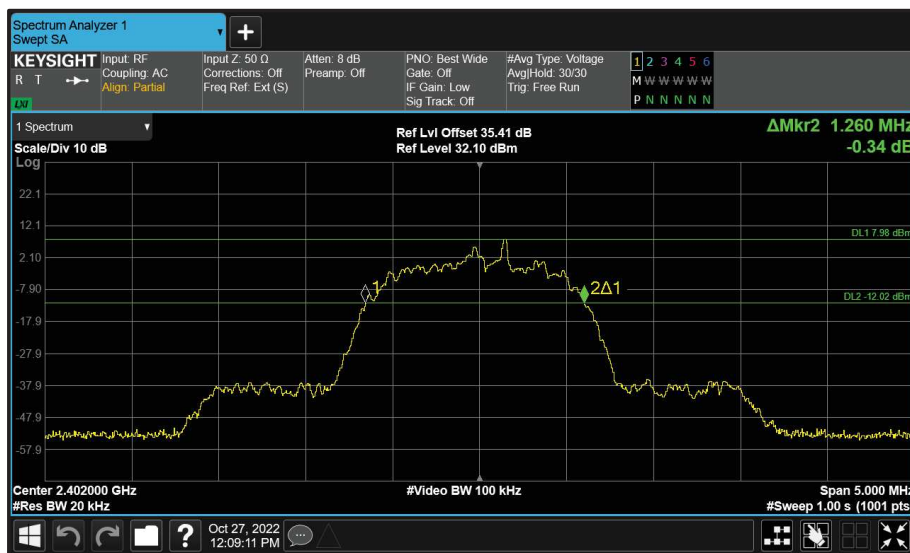


Figure 104 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

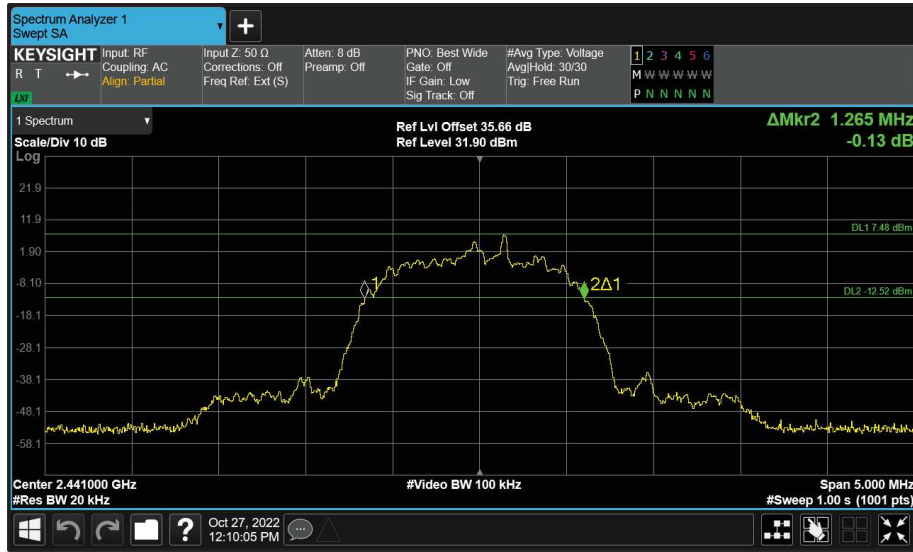


Figure 105 - Core 0 (A) 2441 MHz (CH39) 20 dB Bandwidth

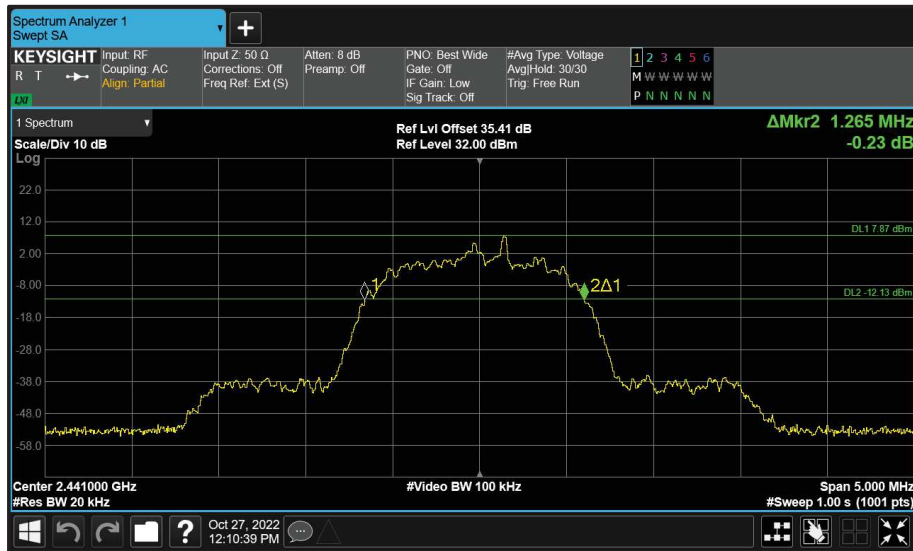


Figure 106 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

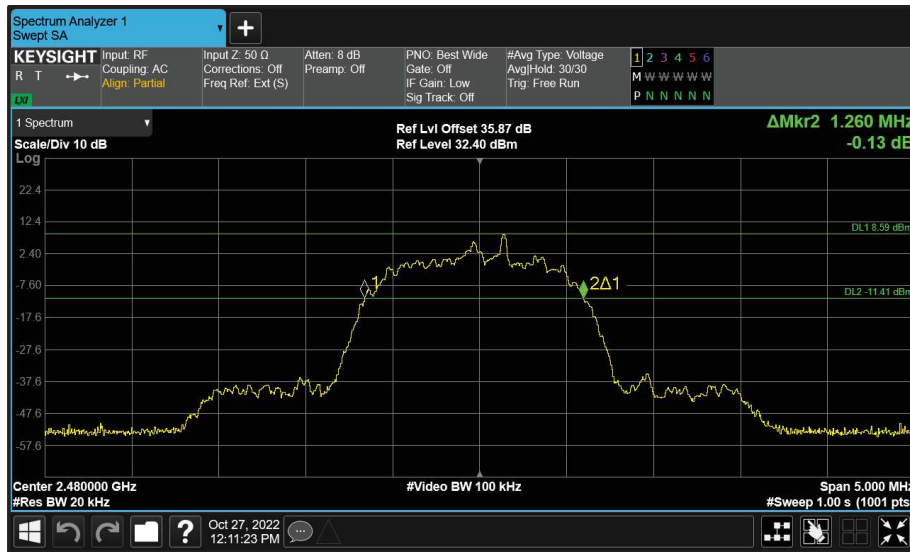


Figure 107 - Core 0 (A) 2480 MHz (CH78) 20 dB Bandwidth

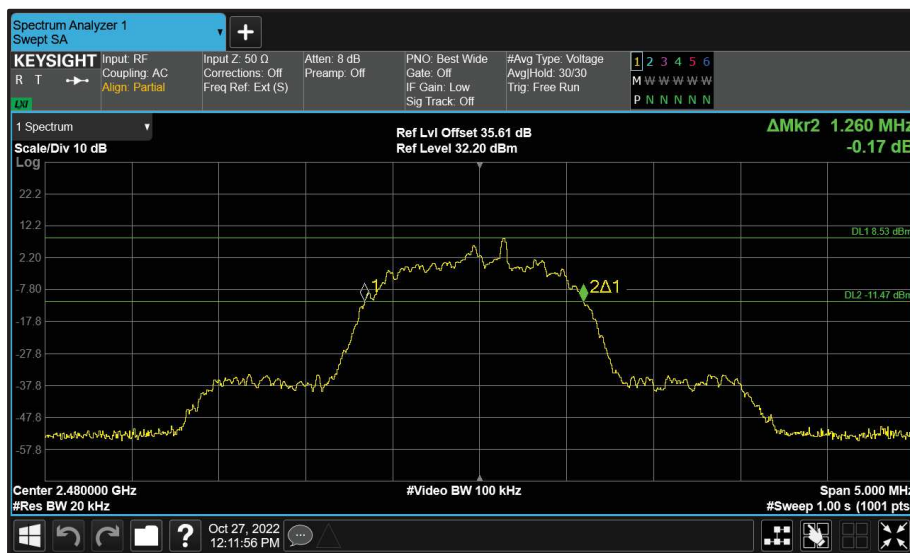


Figure 108 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth

FCC 47 CFR Part 15 and ISED RSS-247 Limit Clause

None specified.



2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Sep-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU002	5759	12	05-Jul-2023

Table 54

O/P Mon – Output Monitored using calibrated equipment



2.6 Maximum Conducted Output Power

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)
ISED RSS-247, Clause 5.4
ISED RSS-GEN, Clause 6.12

2.6.2 Equipment Under Test and Modification State

A2779, S/N: NX7LCFL417 - Modification State 0

2.6.3 Date of Test

14-October-2022

2.6.4 Test Method

The test was performed in accordance with ANSI C63.10 clause 7.8.5

MIMO output port summing was performed in accordance with KDB 662911 D01.

2.6.5 Environmental Conditions

Ambient Temperature	23.6 °C
Relative Humidity	50.4 %



2.6.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.93

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	18.75	-	-	-	30.00	-11.25
2441	-	18.78	-	-	-	30.00	-11.22
2480	-	19.02	-	-	-	30.00	-10.98

Table 55 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	18.75	-	-	-	30.00	-11.25	23.68	36.00	-12.32
2441	-	18.78	-	-	-	30.00	-11.22	23.71	36.00	-12.29
2480	-	19.02	-	-	-	30.00	-10.98	23.95	36.00	-12.05

Table 56 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.93

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	19.99	-	-	-	30.00	-10.01
2441	-	19.83	-	-	-	30.00	-10.17
2480	-	19.60	-	-	-	30.00	-10.40

Table 57 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	19.99	-	-	-	30.00	-10.01	24.92	36.00	-11.08
2441	-	19.83	-	-	-	30.00	-10.17	24.76	36.00	-11.24
2480	-	19.60	-	-	-	30.00	-10.40	24.53	36.00	-11.47

Table 58 - ISCED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.87

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	15.78	15.88	-	-	18.84	20.92	-2.08
2441	15.19	15.71	-	-	18.47	20.92	-2.45
2480	15.01	15.84	-	-	18.46	20.85	-2.39

Table 59 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	15.78	15.88	-	-	18.84	21.00	-2.16	26.71	36.00	-9.29
2441	15.19	15.71	-	-	18.47	21.00	-2.53	26.34	36.00	-9.66
2480	15.01	15.84	-	-	18.46	21.00	-2.54	26.40	36.00	-9.60

Table 60 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	77.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.87

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.40	16.56	-	-	19.49	20.92	-1.43
2441	15.81	16.39	-	-	19.12	20.92	-1.80
2480	15.57	16.39	-	-	19.01	20.85	-1.84

Table 61 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	16.40	16.56	-	-	19.49	21.00	-1.51	27.36	36.00	-8.64
2441	15.81	16.39	-	-	19.12	21.00	-1.88	26.99	36.00	-9.01
2480	15.57	16.39	-	-	19.01	21.00	-1.99	26.95	36.00	-9.05

Table 62 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.93

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	13.13	-	-	-	30.00	-16.87
2441	-	13.34	-	-	-	30.00	-16.66
2480	-	13.36	-	-	-	30.00	-16.64

Table 63 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	13.13	-	-	-	30.00	-16.87	18.06	36.00	-17.94
2441	-	13.34	-	-	-	30.00	-16.66	18.27	36.00	-17.73
2480	-	13.36	-	-	-	30.00	-16.64	18.29	36.00	-17.71

Table 64 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	5.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	13.13	-	-	30.00	-16.87
2441	-	-	13.09	-	-	30.00	-16.91
2480	-	-	13.20	-	-	30.00	-16.80

Table 65 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	13.13	-	-	30.00	-16.87	18.38	36.00	-17.62
2441	-	-	13.09	-	-	30.00	-16.91	18.34	36.00	-17.66
2480	-	-	13.20	-	-	30.00	-16.80	18.45	36.00	-17.55

Table 66 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.87

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	13.23	13.38	-	-	16.32	20.92	-4.60
2441	13.29	13.31	-	-	16.31	20.92	-4.61
2480	13.30	13.31	-	-	16.31	20.85	-4.53

Table 67 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	13.23	13.38	-	-	16.32	21.00	-4.68	24.19	36.00	-11.81
2441	13.29	13.31	-	-	16.31	21.00	-4.69	24.18	36.00	-11.82
2480	13.30	13.31	-	-	16.31	21.00	-4.69	24.26	36.00	-11.74

Table 68 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.93

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	11.77	-	-	-	30.00	-18.23
2441	-	11.60	-	-	-	30.00	-18.40
2480	-	11.64	-	-	-	30.00	-18.36

Table 69 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	11.77	-	-	-	30.00	-18.23	16.70	36.00	-19.30
2441	-	11.60	-	-	-	30.00	-18.40	16.53	36.00	-19.47
2480	-	11.64	-	-	-	30.00	-18.36	16.57	36.00	-19.43

Table 70 - ISCED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.93

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	12.16	-	-	-	30.00	-17.84
2441	-	12.00	-	-	-	30.00	-18.00
2480	-	12.01	-	-	-	30.00	-17.99

Table 71 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	12.16	-	-	-	30.00	-17.84	17.09	36.00	-18.91
2441	-	12.00	-	-	-	30.00	-18.00	16.93	36.00	-19.07
2480	-	12.01	-	-	-	30.00	-17.99	16.94	36.00	-19.06

Table 72 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	5.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	11.66	-	-	30.00	-18.34
2441	-	-	11.98	-	-	30.00	-18.02
2480	-	-	11.63	-	-	30.00	-18.37

Table 73 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	11.66	-	-	30.00	-18.34	16.91	36.00	-19.09
2441	-	-	11.98	-	-	30.00	-18.02	17.23	36.00	-18.77
2480	-	-	11.63	-	-	30.00	-18.37	16.88	36.00	-19.12

Table 74 - ISCED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	5.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	12.09	-	-	30.00	-17.91
2441	-	-	12.34	-	-	30.00	-17.66
2480	-	-	12.00	-	-	30.00	-18.00

Table 75 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	12.09	-	-	30.00	-17.91	17.34	36.00	-18.66
2441	-	-	12.34	-	-	30.00	-17.66	17.59	36.00	-18.41
2480	-	-	12.00	-	-	30.00	-18.00	17.25	36.00	-18.75

Table 76 - ISCED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.87

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	11.48	11.72	-	-	14.61	20.92	-6.31
2441	11.45	11.59	-	-	14.53	20.92	-6.39
2480	11.98	11.89	-	-	14.95	20.85	-5.90

Table 77 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	11.48	11.72	-	-	14.61	21.00	-6.39	22.48	36.00	-13.52
2441	11.45	11.59	-	-	14.53	21.00	-6.47	22.40	36.00	-13.60
2480	11.98	11.89	-	-	14.95	21.00	-6.05	22.89	36.00	-13.11

Table 78 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.87

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	11.93	12.11	-	-	15.03	20.92	-5.89
2441	11.90	11.99	-	-	14.96	20.92	-5.96
2480	12.43	12.23	-	-	15.34	20.85	-5.51

Table 79 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	11.93	12.11	-	-	15.03	21.00	-5.97	22.90	36.00	-13.10
2441	11.90	11.99	-	-	14.96	21.00	-6.04	22.83	36.00	-13.17
2480	12.43	12.23	-	-	15.34	21.00	-5.66	23.28	36.00	-12.72

Table 80 - ISED Maximum Conducted (peak) Output Power Results

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

ISED RSS-247, Limit Clause 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channel; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channel. The e.i.r.p. shall not exceed 4 W except as provided in section 5.4(e) of the specification.



2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU002	5759	12	05-Jul-2023
USB Power Sensor	Boonton	RTP5008	5830	12	07-Jul-2023
USB Power Sensor	Boonton	RTP5008	5832	12	07-Jul-2023
USB Power Sensor	Boonton	RTP5008	5833	12	07-Jul-2023

Table 81

O/P Mon – Output Monitored using calibrated equipment



2.7 Spurious Radiated Emissions

2.7.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.209 and 15.247 (d)
ISED RSS-247, Clause 3.3 and 5.5
ISED RSS-GEN, Clause 6.13 and 8.9

2.7.2 Equipment Under Test and Modification State

A2779, S/N: JM67M9K770 - Modification State 0

2.7.3 Date of Test

27-September-2022 to 13-October-2022

2.7.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5 to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.2.

Ports on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4. For EUT's with multiple connectors of the same type, additional interconnecting cables were connected, and pre-scans performed to determine whether the level of the emissions were increased by >2 dB.

In the 30 MHz to 1 GHz range pre-scans were only performed on the mid channel (2441 MHz) only.

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

Above 18 GHz, the measurement distance was reduced to 1 m. The limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

At a measurement distance of 1 meter the limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

Where formal measurements have been necessary, the results have been presented in the emissions table.

2.7.5 Test Setup Diagram

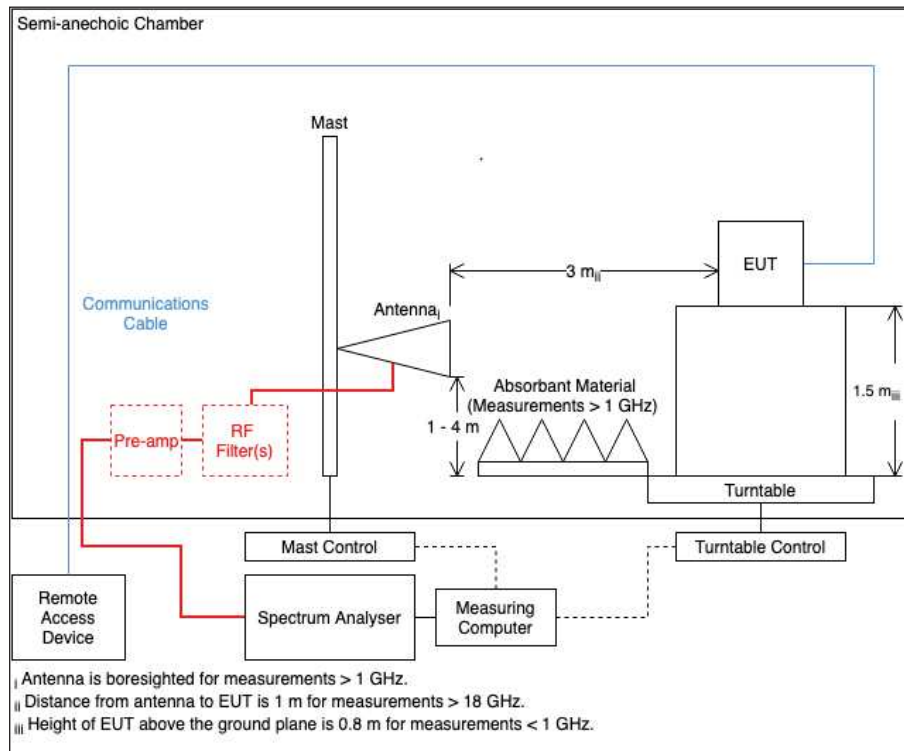


Figure 109

2.7.6 Environmental Conditions

Ambient Temperature	21.7 - 22.5 °C
Relative Humidity	45.6 - 52.0 %



2.7.7 Test Results

2.4 GHz Bluetooth - FHSS

Frequency (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 82 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

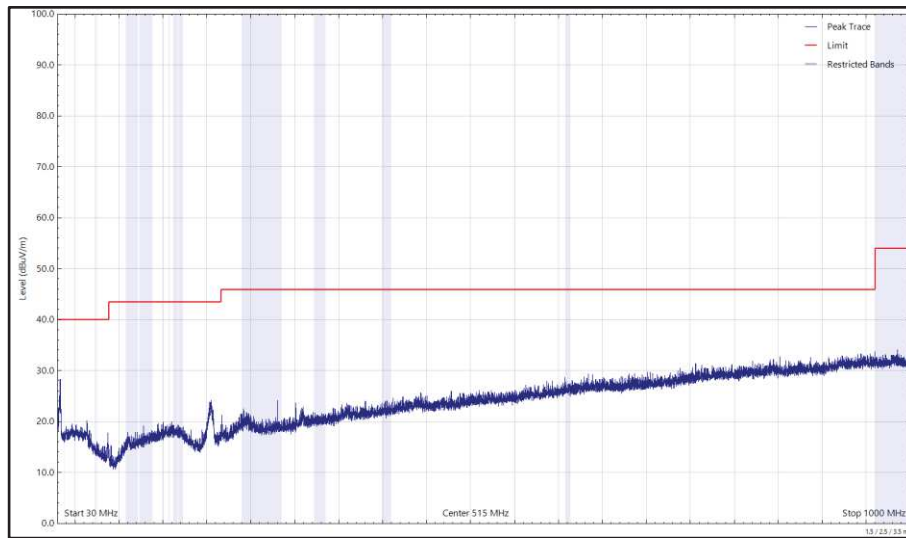


Figure 110 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

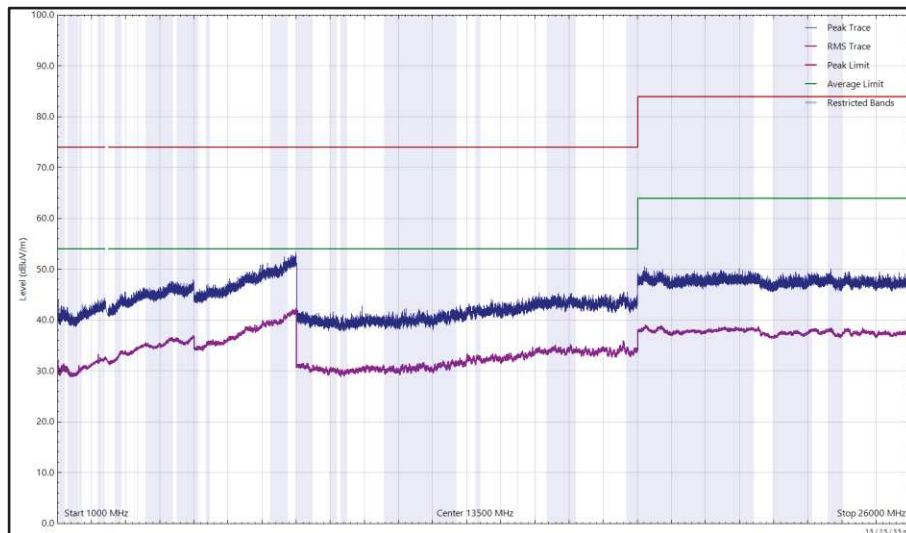


Figure 111 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

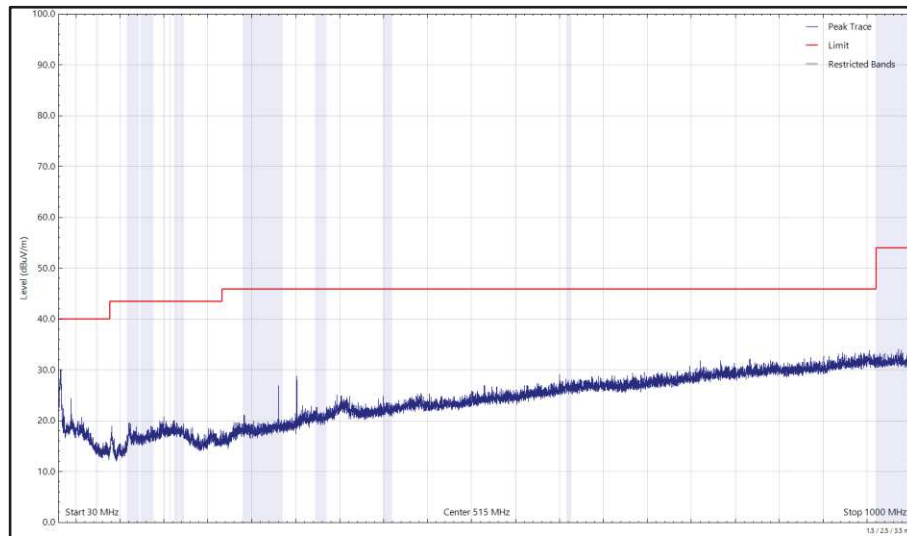


Figure 112 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

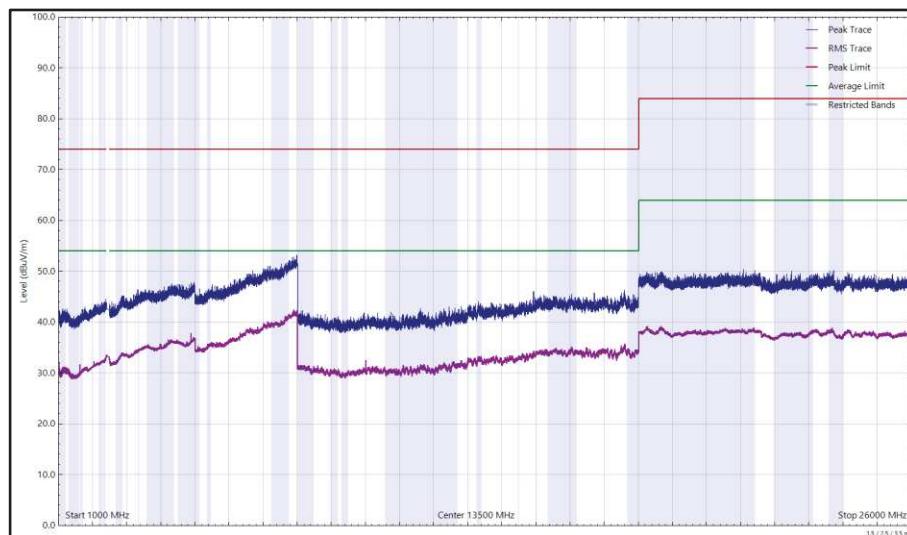


Figure 113 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 83 - 2441 MHz (CH39), DH5, iPA, Core 2, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

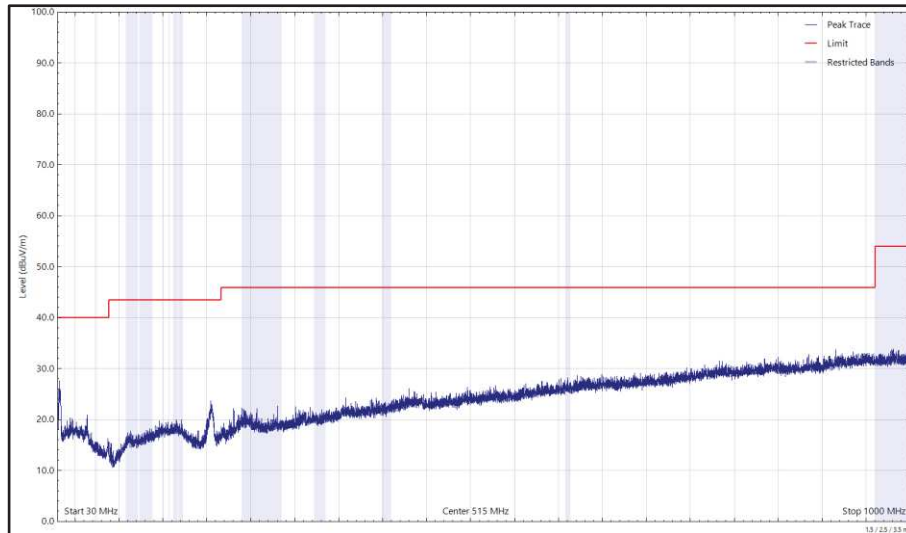


Figure 114 - 2441 MHz (CH39), DH5, iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

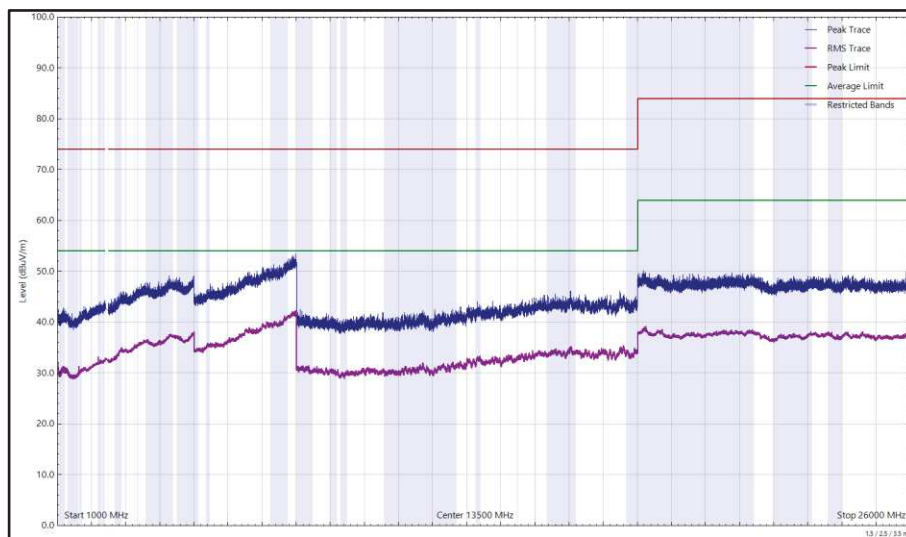


Figure 115 - 2441 MHz (CH39), DH5, iPA, Core 2, 1 GHz to 26 GHz, Horizontal

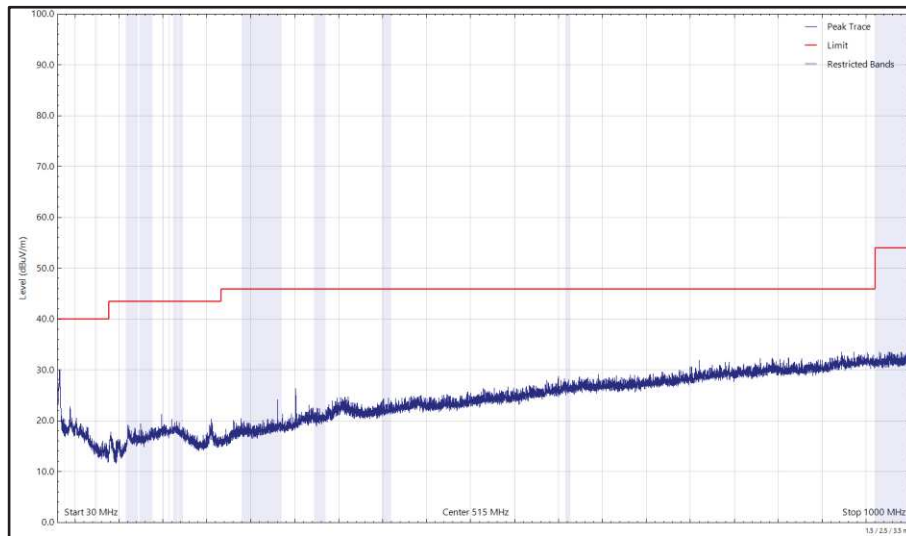


Figure 116 - 2441 MHz (CH39), DH5, iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

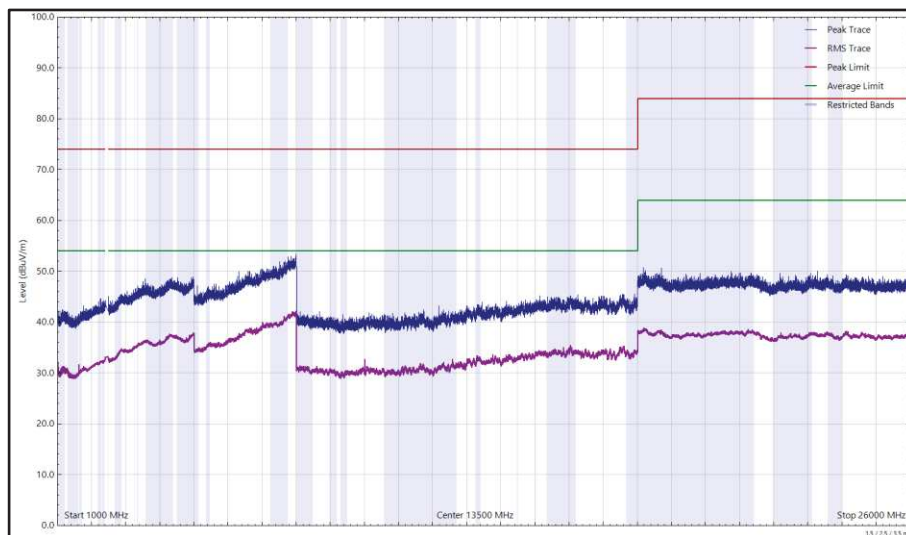


Figure 117 - 2441 MHz (CH39), DH5, iPA, Core 2, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 84 - 2441 MHz (CH39), 2DH5, ePA, Core 0 + Core 1, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

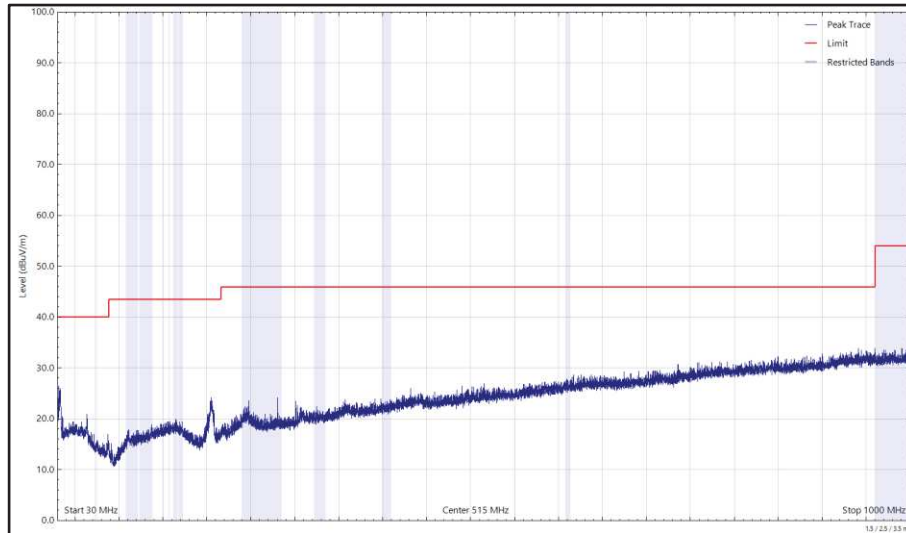


Figure 118 - 2441 MHz (CH39), 2DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

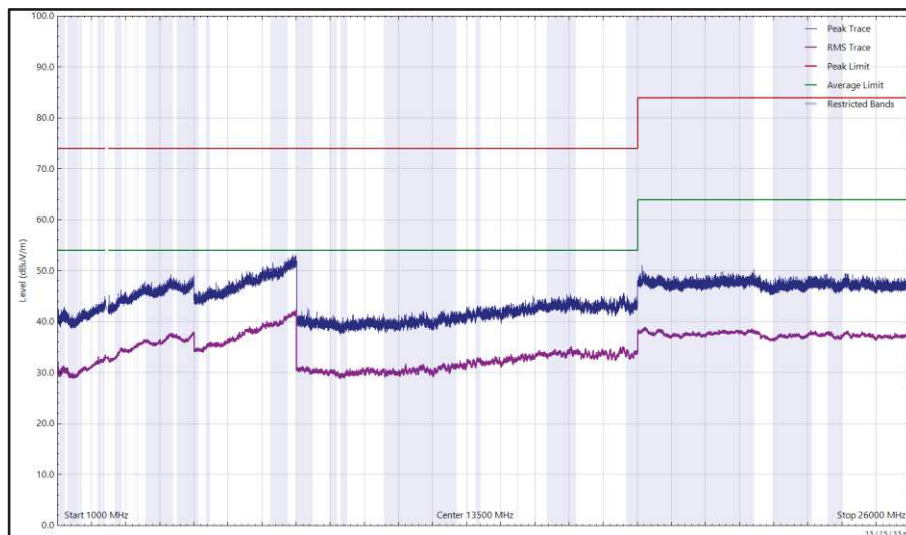


Figure 119 - 2441 MHz (CH39), 2DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

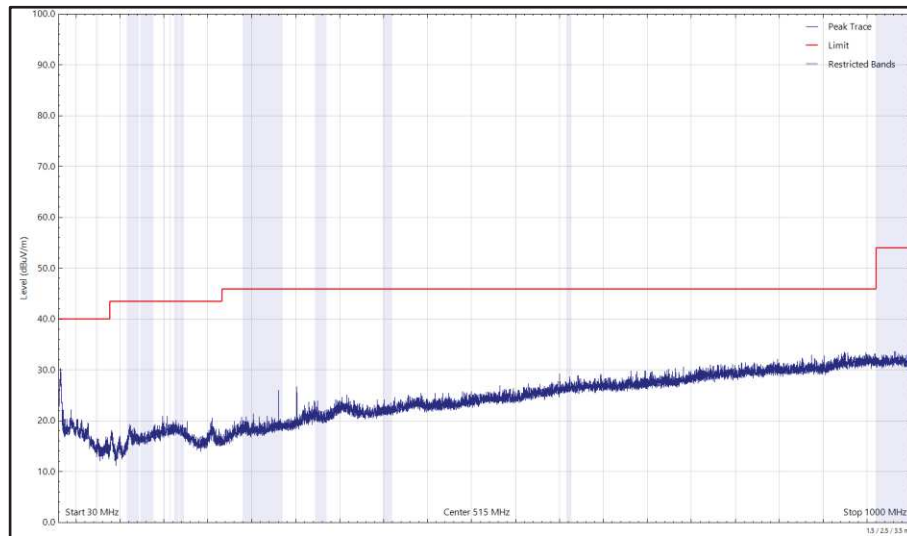


Figure 120 - 2441 MHz (CH39), 2DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

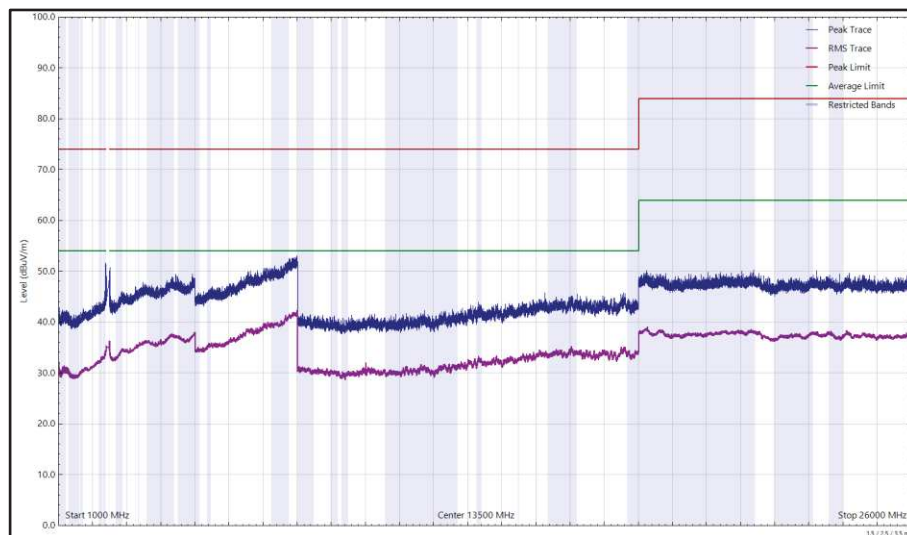


Figure 121 - 2441 MHz (CH39), 2DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 85 - 2402 MHz (CH0), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

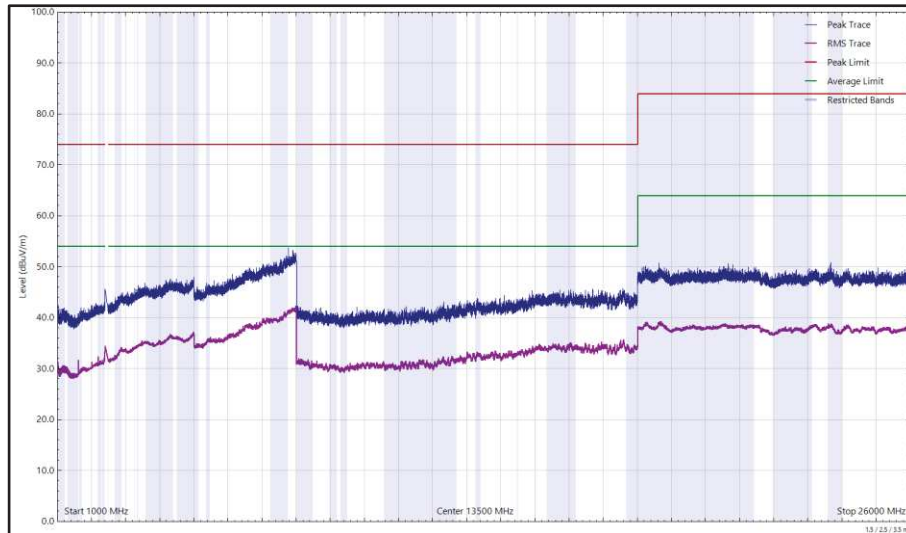


Figure 122 - 2402 MHz (CH0), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

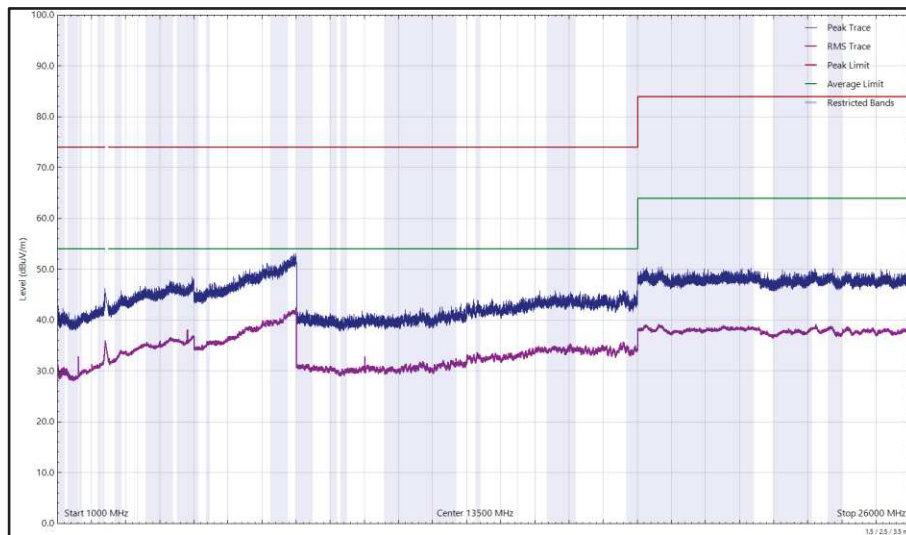


Figure 123 - 2402 MHz (CH0), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 86 - 2480 MHz (CH78), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

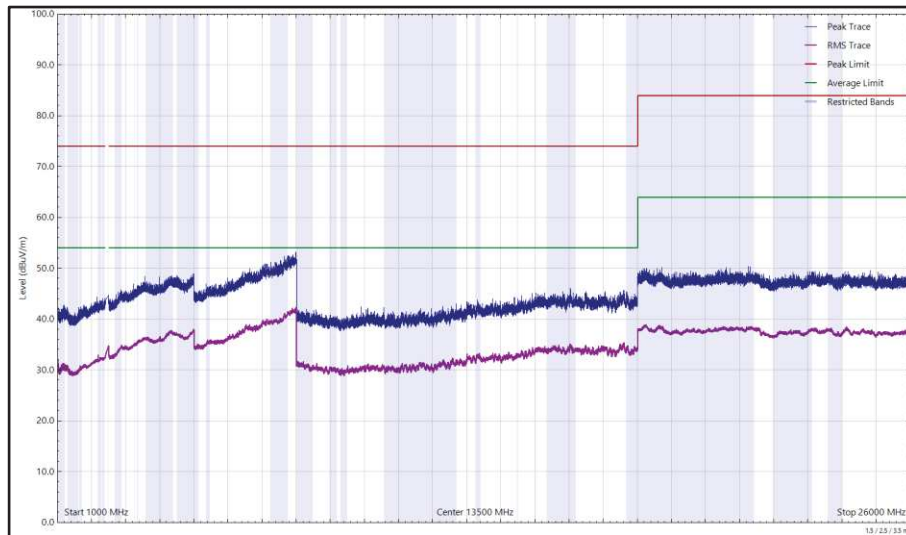


Figure 124 - 2480 MHz (CH78), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

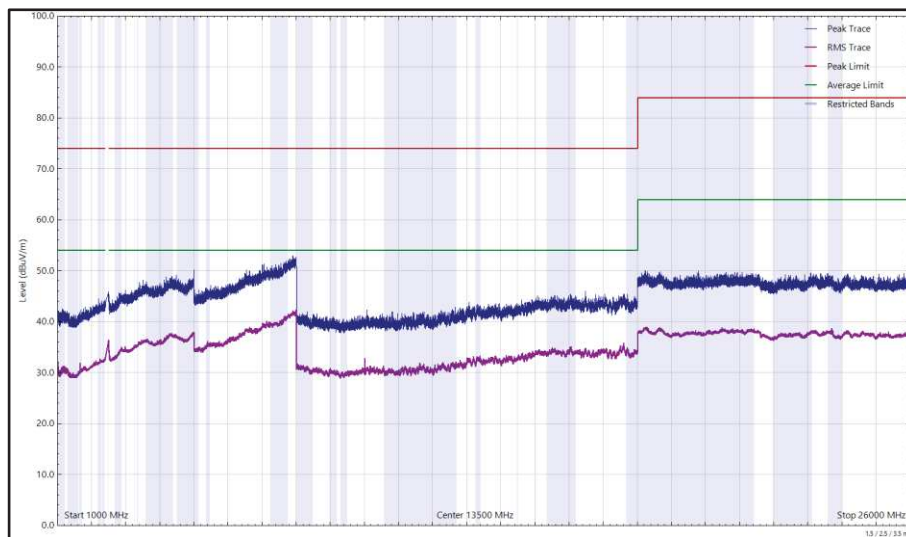


Figure 125 - 2480 MHz (CH78), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical