

Figure 83 - Core 0 (A) 2480 MHz (CH78) 20 dB Bandwidth

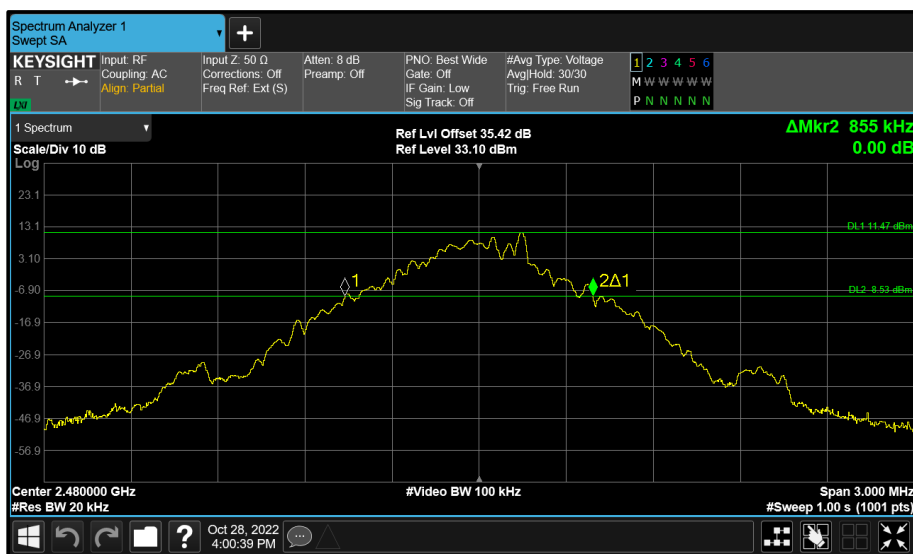


Figure 84 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	1.330	-	-
2441	-	1.325	-	-
2480	-	1.330	-	-

Table 48 - 20 dB Bandwidth Results

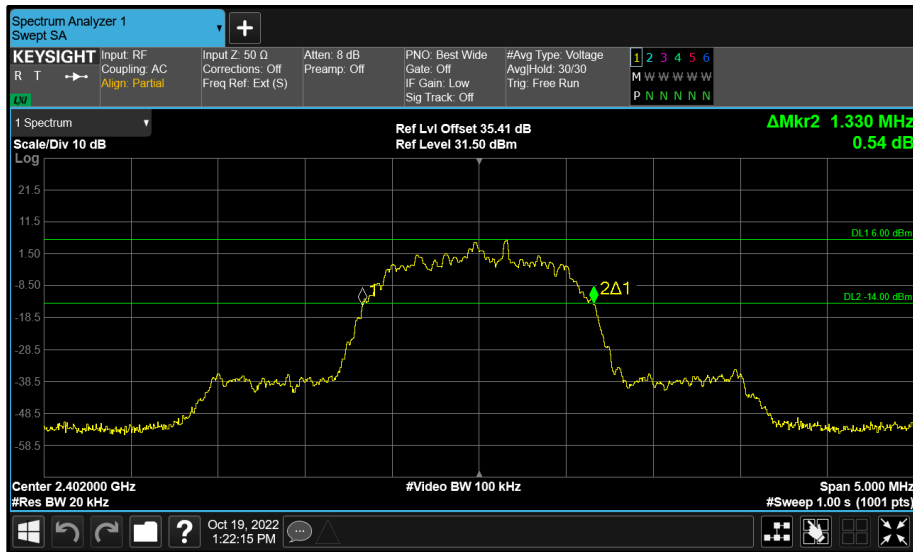


Figure 85 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

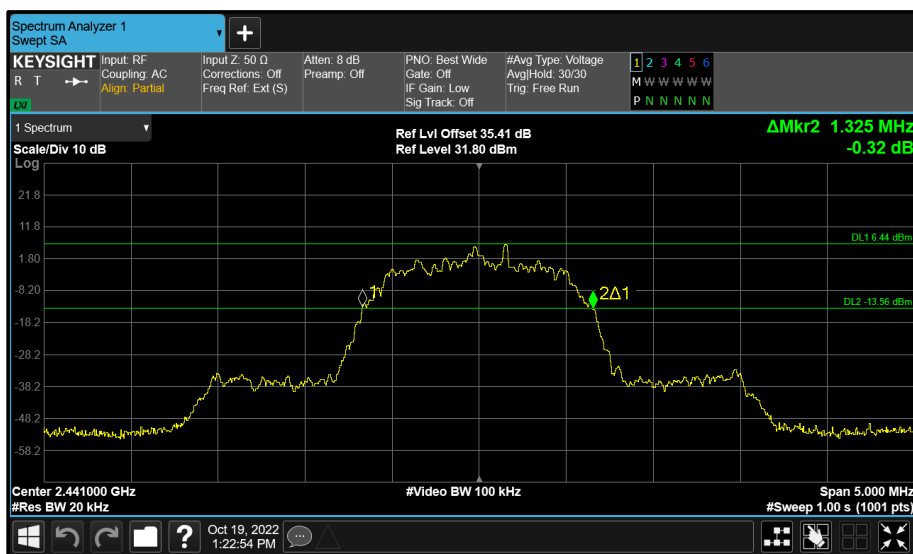


Figure 86 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

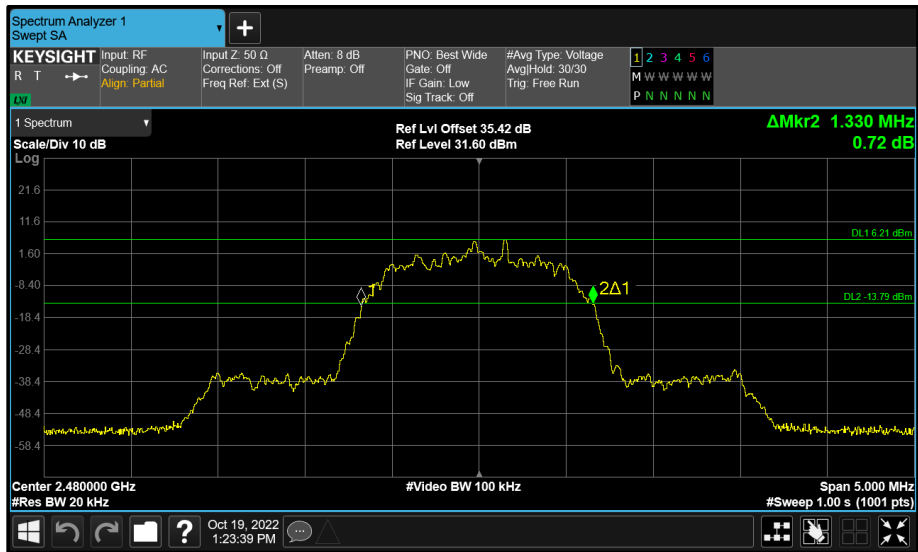


Figure 87 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	1.265	-	-
2441	-	1.260	-	-
2480	-	1.265	-	-

Table 49 - 20 dB Bandwidth Results

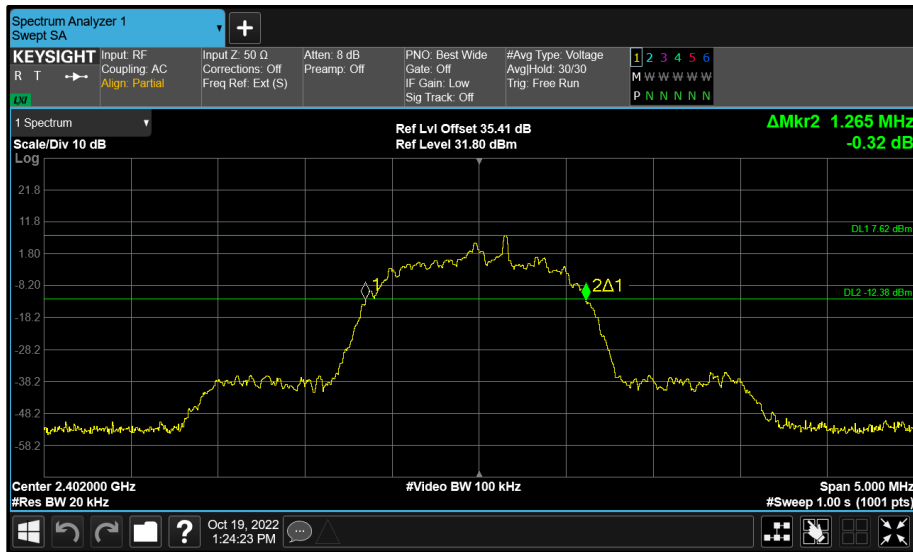


Figure 88 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

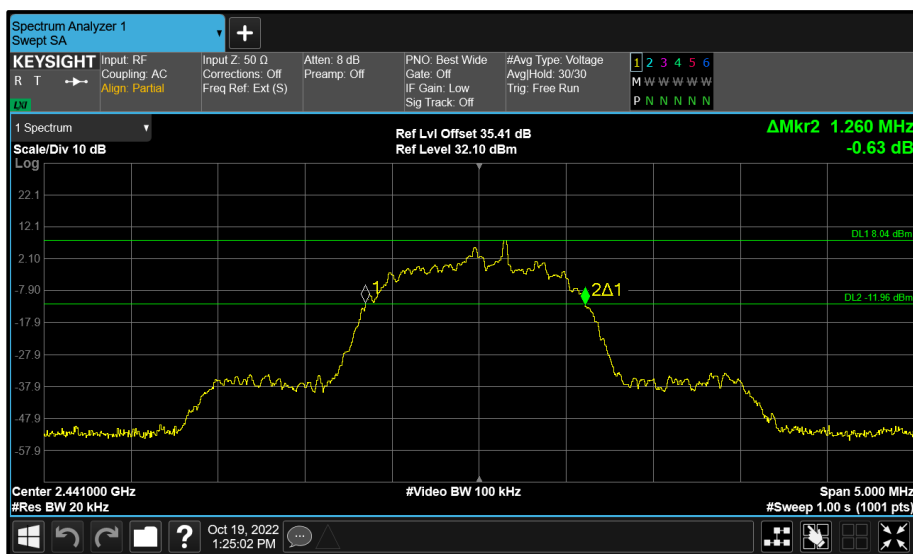


Figure 89 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

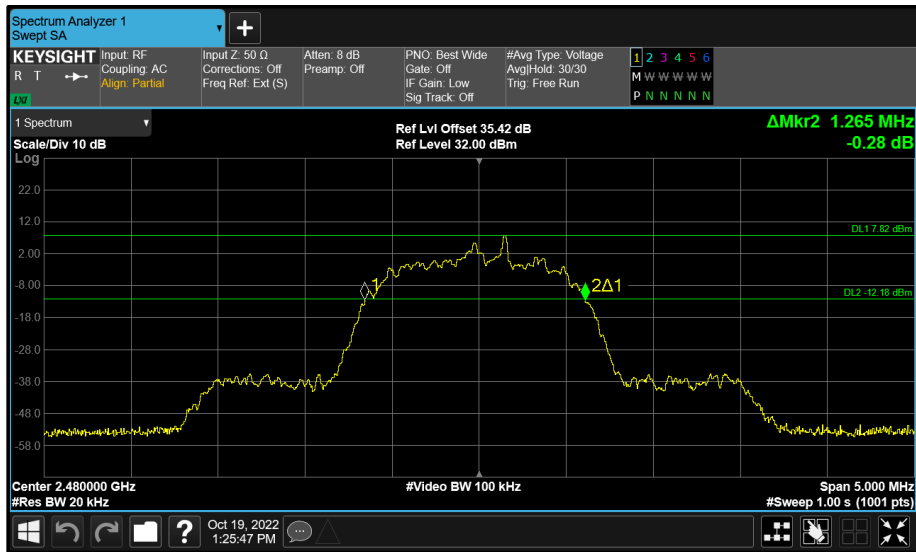


Figure 90 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	-	1.330	-
2441	-	-	1.325	-
2480	-	-	1.330	-

Table 50 - 20 dB Bandwidth Results

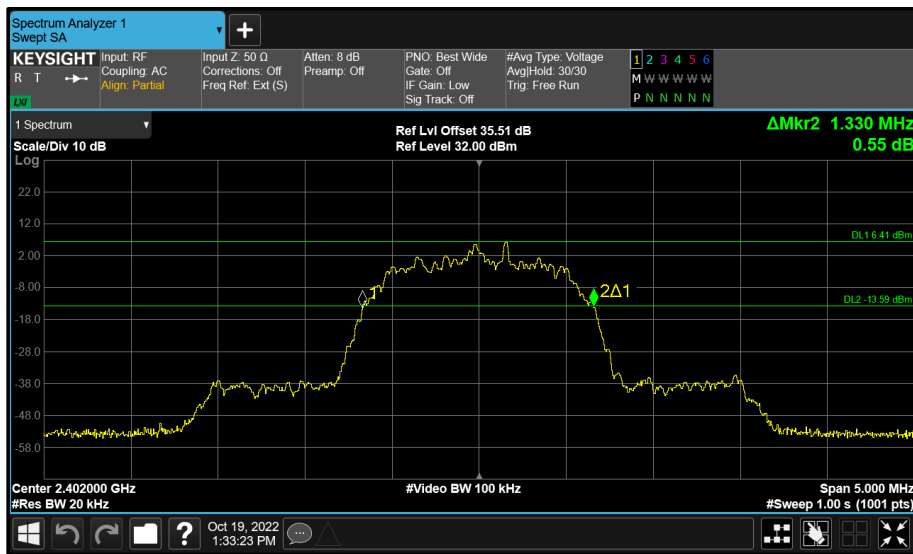


Figure 91 - Core 2 (C) 2402 MHz (CH0) 20 dB Bandwidth

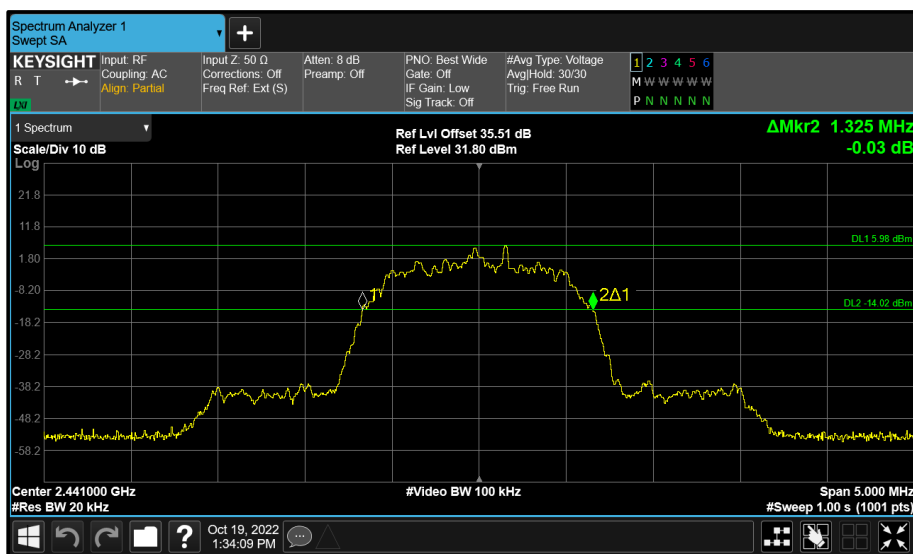


Figure 92 - Core 2 (C) 2441 MHz (CH39) 20 dB Bandwidth

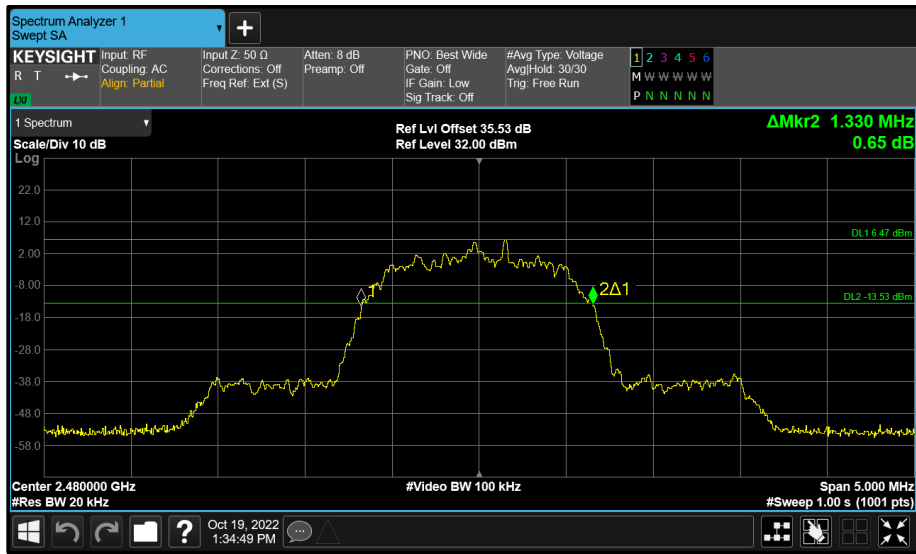


Figure 93 - Core 2 (C) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	-	1.265	-
2441	-	-	1.260	-
2480	-	-	1.265	-

Table 51 - 20 dB Bandwidth Results

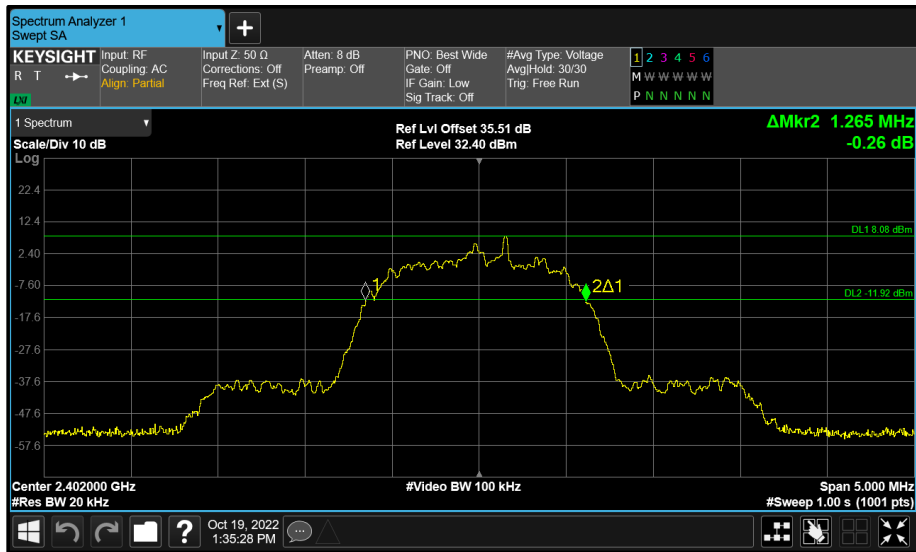


Figure 94 - Core 2 (C) 2402 MHz (CH0) 20 dB Bandwidth

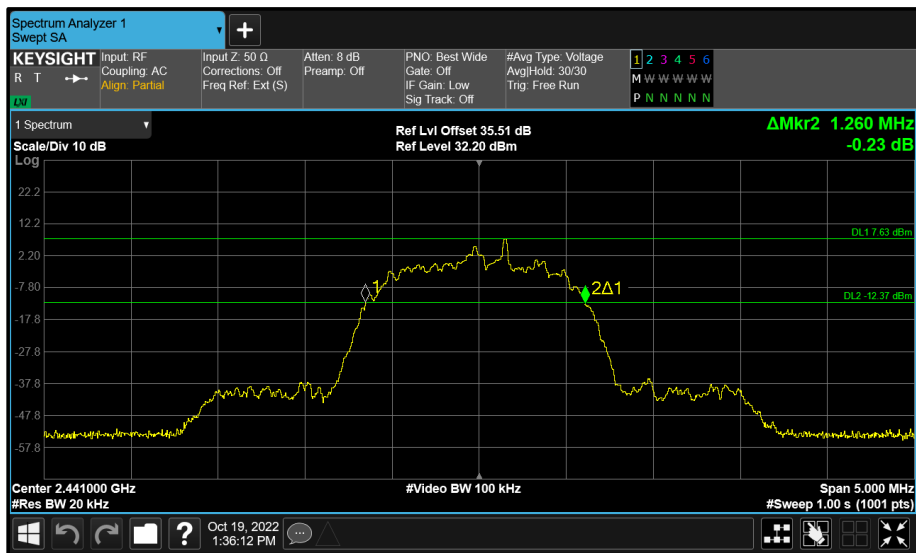


Figure 95 - Core 2 (C) 2441 MHz (CH39) 20 dB Bandwidth

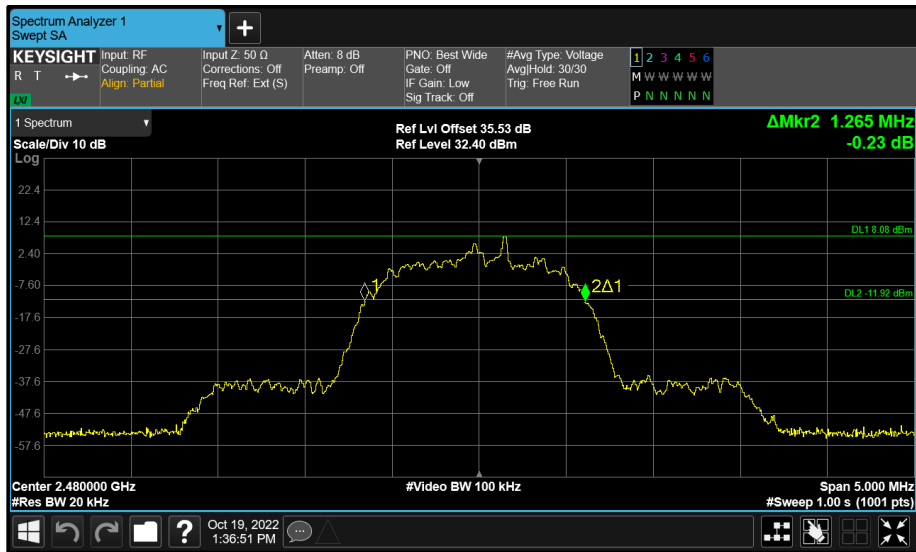


Figure 96 - Core 2 (C) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.330	1.325	-	-
2441	1.325	1.325	-	-
2480	1.330	1.330	-	-

Table 52 - 20 dB Bandwidth Results

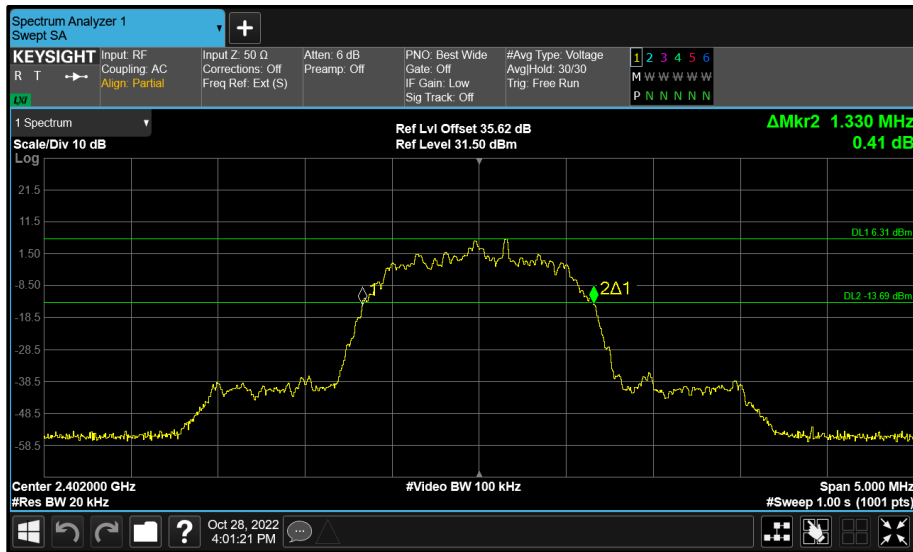


Figure 97 - Core 0 (A) 2402 MHz (CH0) 20 dB Bandwidth

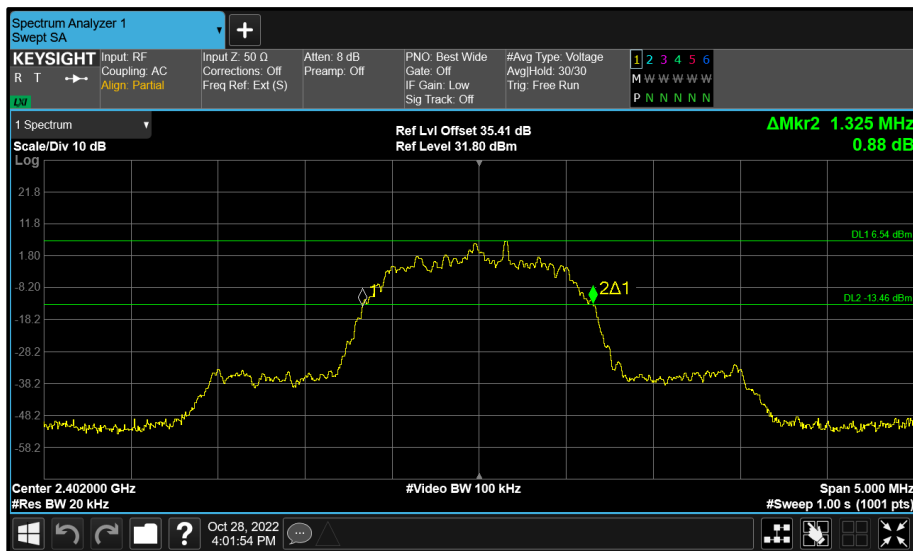


Figure 98 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

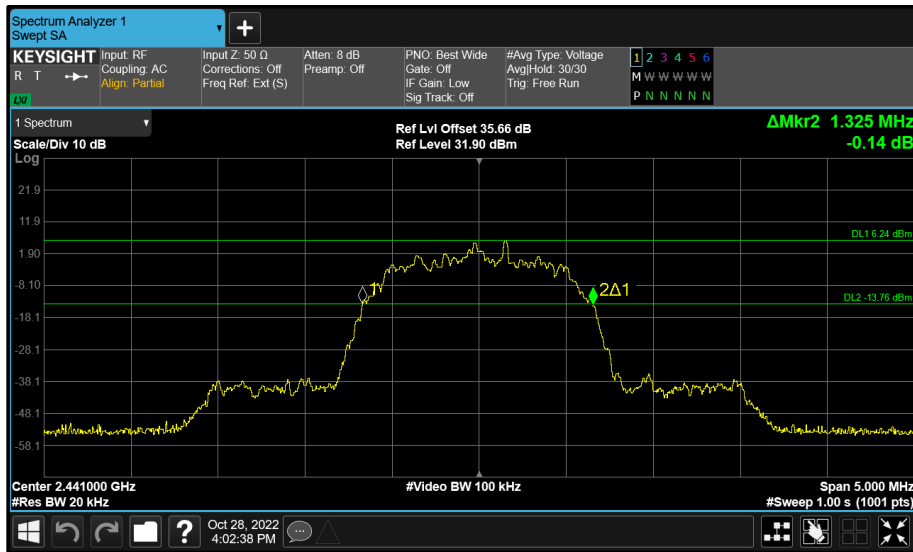


Figure 99 - Core 0 (A) 2441 MHz (CH39) 20 dB Bandwidth

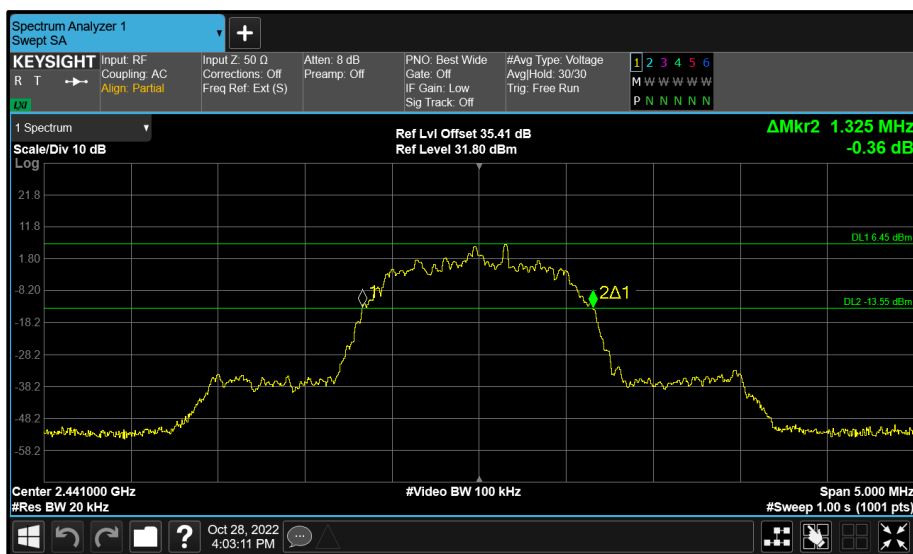


Figure 100 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

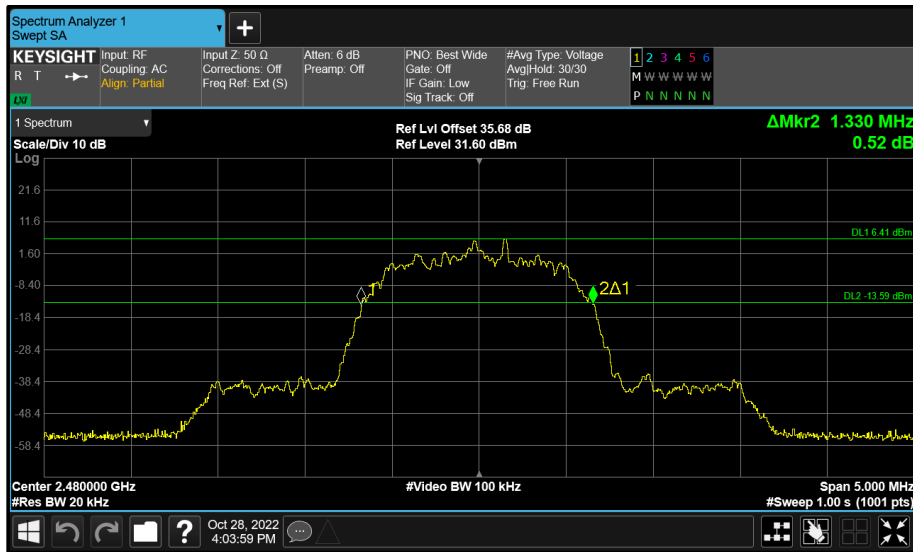


Figure 101 - Core 0 (A) 2480 MHz (CH78) 20 dB Bandwidth

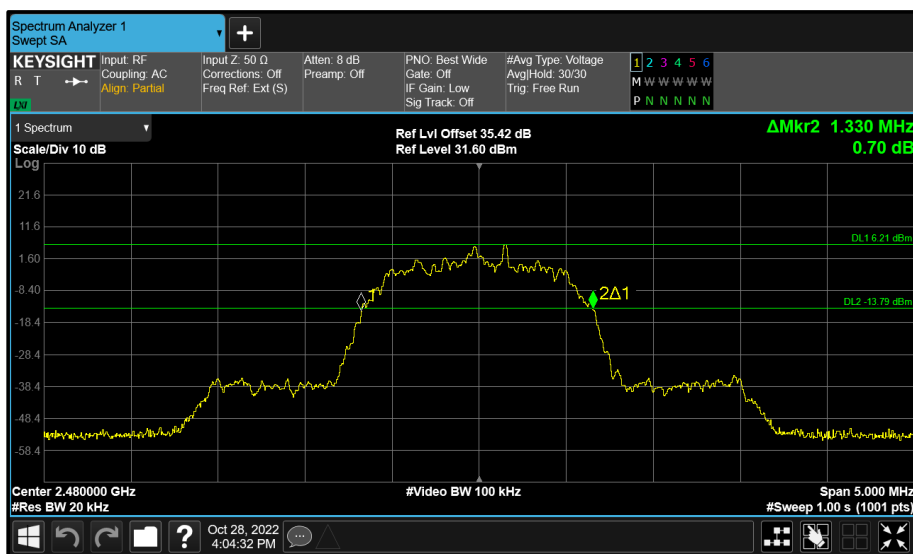


Figure 102 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.265	1.265	-	-
2441	1.260	1.260	-	-
2480	1.265	1.265	-	-

Table 53 - 20 dB Bandwidth Results

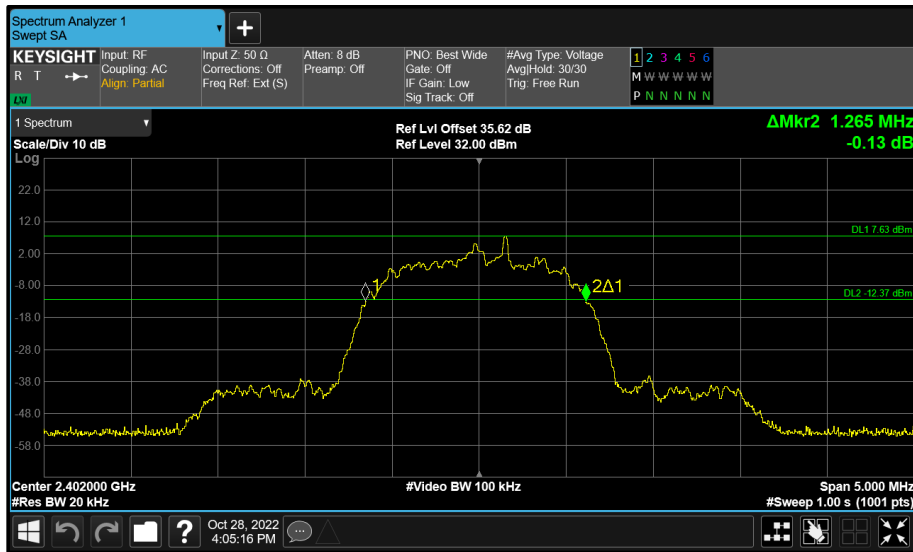


Figure 103 - Core 0 (A) 2402 MHz (CH0) 20 dB Bandwidth

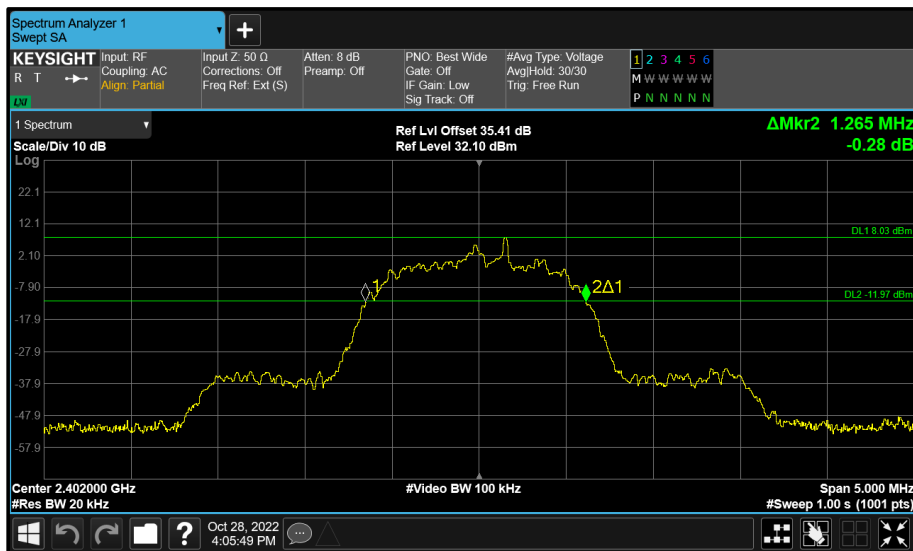


Figure 104 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

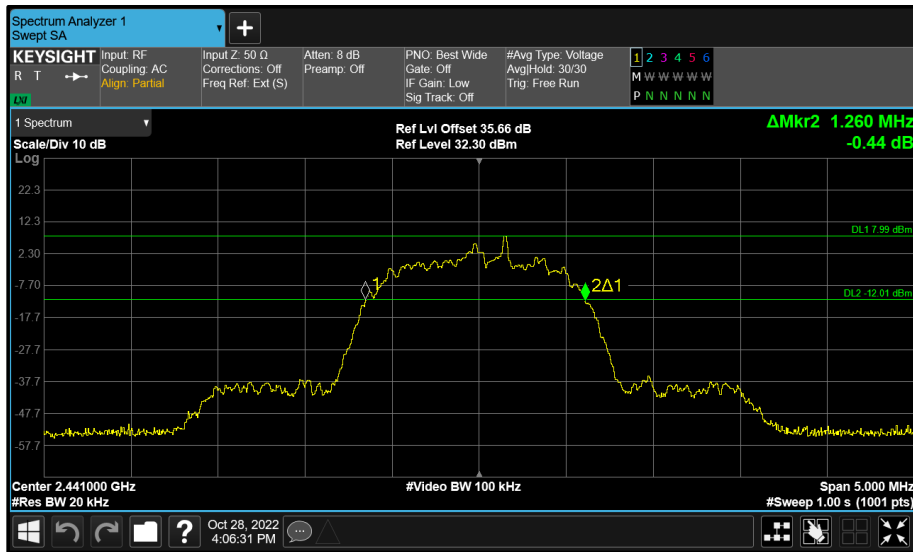


Figure 105 - Core 0 (A) 2441 MHz (CH39) 20 dB Bandwidth

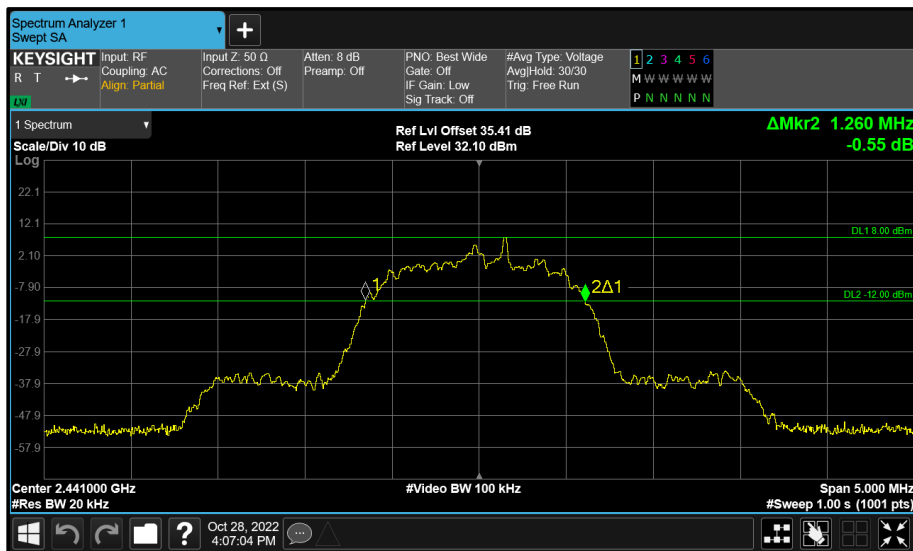


Figure 106 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

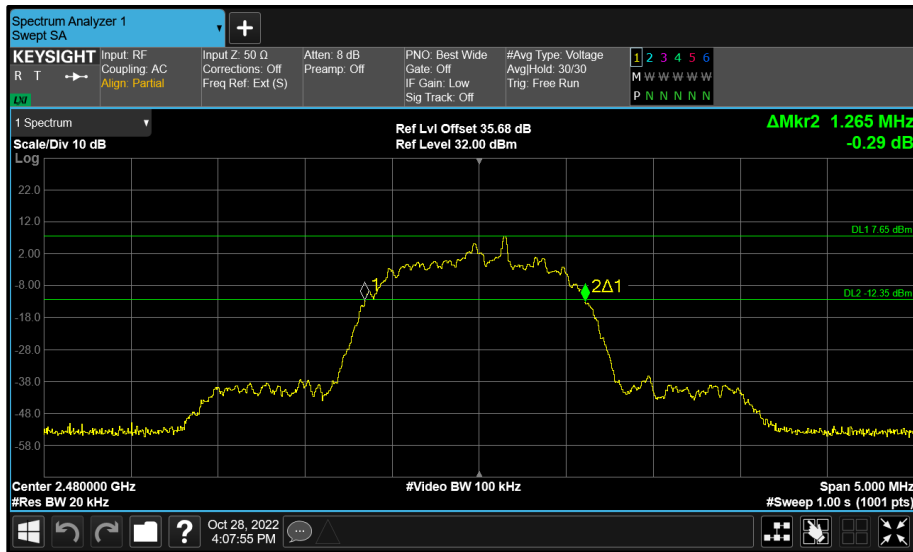


Figure 107 - Core 0 (A) 2480 MHz (CH78) 20 dB Bandwidth

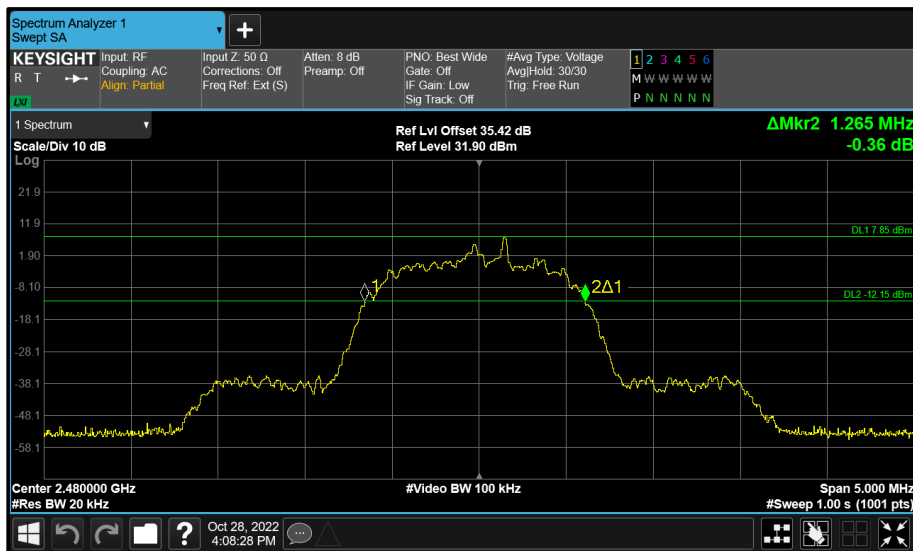


Figure 108 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth

FCC 47 CFR Part 15 and ISED RSS-247 Limit Clause

None specified.



2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Sep-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU002	5759	12	05-Jul-2023

Table 54

O/P Mon – Output Monitored using calibrated equipment



2.6 Maximum Conducted Output Power

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)
ISED RSS-247, Clause 5.4
ISED RSS-GEN, Clause 6.12

2.6.2 Equipment Under Test and Modification State

A2780, S/N: NW3J007K67 - Modification State 0

2.6.3 Date of Test

19-October-2022 to 28-October-2022

2.6.4 Test Method

The test was performed in accordance with ANSI C63.10 clause 7.8.5.

MIMO output port summing was performed in accordance with KDB 662911 D01.

2.6.5 Environmental Conditions

Ambient Temperature	22.7 - 23.5 °C
Relative Humidity	52.6 - 56.9 %



2.6.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	6.13

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	18.76	-	-	-	29.87	-11.11
2441	-	18.80	-	-	-	29.87	-11.07
2480	-	19.36	-	-	-	29.87	-10.51

Table 55 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	18.76	-	-	-	30.00	-11.24	24.89	36.00	-11.11
2441	-	18.80	-	-	-	30.00	-11.20	24.93	36.00	-11.07
2480	-	19.36	-	-	-	30.00	-10.64	25.49	36.00	-10.51

Table 56 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	6.13

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	19.39	-	-	-	29.87	-10.48
2441	-	19.44	-	-	-	29.87	-10.43
2480	-	18.79	-	-	-	29.87	-11.08

Table 57 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	19.39	-	-	-	30.00	-10.61	25.52	36.00	-10.48
2441	-	19.44	-	-	-	30.00	-10.56	25.57	36.00	-10.43
2480	-	18.79	-	-	-	30.00	-11.21	24.92	36.00	-11.08

Table 58 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	8.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	15.36	15.87	-	-	18.64	27.59	-8.96
2441	15.27	15.80	-	-	18.55	27.59	-9.04
2480	15.10	15.77	-	-	18.46	27.59	-9.13

Table 59 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	15.36	15.87	-	-	18.64	21.00	-2.36	27.04	36.00	-8.96
2441	15.27	15.80	-	-	18.55	21.00	-2.45	26.96	36.00	-9.04
2480	15.10	15.77	-	-	18.46	21.00	-2.54	26.87	36.00	-9.13

Table 60 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	8.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.45	16.48	-	-	19.48	27.59	-8.12
2441	15.89	16.34	-	-	19.13	27.59	-8.46
2480	15.76	16.31	-	-	19.06	27.59	-8.54

Table 61 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	16.45	16.48	-	-	19.48	21.00	-1.52	27.88	36.00	-8.12
2441	15.89	16.34	-	-	19.13	21.00	-1.87	27.54	36.00	-8.46
2480	15.76	16.31	-	-	19.06	21.00	-1.94	27.46	36.00	-8.54

Table 62 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	6.13

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	13.38	-	-	-	29.87	-16.49
2441	-	13.37	-	-	-	29.87	-16.50
2480	-	13.42	-	-	-	29.87	-16.45

Table 63 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	13.38	-	-	-	30.00	-16.62	19.51	36.00	-16.49
2441	-	13.37	-	-	-	30.00	-16.63	19.50	36.00	-16.50
2480	-	13.42	-	-	-	30.00	-16.58	19.55	36.00	-16.45

Table 64 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	6.02

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	13.06	-	-	29.98	-16.92
2441	-	-	13.15	-	-	29.98	-16.83
2480	-	-	13.04	-	-	29.98	-16.94

Table 65 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	13.06	-	-	30.00	-16.94	19.08	36.00	-16.92
2441	-	-	13.15	-	-	30.00	-16.85	19.17	36.00	-16.83
2480	-	-	13.04	-	-	30.00	-16.96	19.06	36.00	-16.94

Table 66 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	8.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	13.18	13.36	-	-	16.28	27.59	-11.31
2441	13.32	13.34	-	-	16.34	27.59	-11.25
2480	12.79	13.05	-	-	15.93	27.59	-11.66

Table 67 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	13.18	13.36	-	-	16.28	21.00	-4.72	24.69	36.00	-11.31
2441	13.32	13.34	-	-	16.34	21.00	-4.66	24.75	36.00	-11.25
2480	12.79	13.05	-	-	15.93	21.00	-5.07	24.34	36.00	-11.66

Table 68 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	6.13

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	11.48	-	-	-	29.87	-18.39
2441	-	11.81	-	-	-	29.87	-18.06
2480	-	11.64	-	-	-	29.87	-18.23

Table 69 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	11.48	-	-	-	30.00	-18.52	17.61	36.00	-18.39
2441	-	11.81	-	-	-	30.00	-18.19	17.94	36.00	-18.06
2480	-	11.64	-	-	-	30.00	-18.36	17.77	36.00	-18.23

Table 70 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	6.13

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	11.83	-	-	-	29.87	-18.04
2441	-	12.13	-	-	-	29.87	-17.74
2480	-	11.99	-	-	-	29.87	-17.88

Table 71 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	11.83	-	-	-	30.00	-18.17	17.96	36.00	-18.04
2441	-	12.13	-	-	-	30.00	-17.87	18.26	36.00	-17.74
2480	-	11.99	-	-	-	30.00	-18.01	18.12	36.00	-17.88

Table 72 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	6.02

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	11.95	-	-	29.98	-18.03
2441	-	-	11.76	-	-	29.98	-18.22
2480	-	-	11.98	-	-	29.98	-18.00

Table 73 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	11.95	-	-	30.00	-18.05	17.97	36.00	-18.03
2441	-	-	11.76	-	-	30.00	-18.24	17.78	36.00	-18.22
2480	-	-	11.98	-	-	30.00	-18.02	18.00	36.00	-18.00

Table 74 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	6.02

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	12.36	-	-	29.98	-17.62
2441	-	-	12.17	-	-	29.98	-17.81
2480	-	-	12.35	-	-	29.98	-17.63

Table 75 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	12.36	-	-	30.00	-17.64	18.38	36.00	-17.62
2441	-	-	12.17	-	-	30.00	-17.83	18.19	36.00	-17.81
2480	-	-	12.35	-	-	30.00	-17.65	18.37	36.00	-17.63

Table 76 - ISCED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	8.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	11.55	11.80	-	-	14.68	27.59	-12.91
2441	11.90	11.78	-	-	14.85	27.59	-12.74
2480	11.58	11.60	-	-	14.60	27.59	-12.99

Table 77 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	11.55	11.80	-	-	14.68	21.00	-6.32	23.09	36.00	-12.91
2441	11.90	11.78	-	-	14.85	21.00	-6.15	23.26	36.00	-12.74
2480	11.58	11.60	-	-	14.60	21.00	-6.40	23.01	36.00	-12.99

Table 78 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	8.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	11.97	12.14	-	-	15.07	27.59	-12.52
2441	12.31	12.06	-	-	15.20	27.59	-12.39
2480	11.99	11.94	-	-	14.97	27.59	-12.62

Table 79 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	11.97	12.14	-	-	15.07	21.00	-5.93	23.48	36.00	-12.52
2441	12.31	12.06	-	-	15.20	21.00	-5.80	23.61	36.00	-12.39
2480	11.99	11.94	-	-	14.97	21.00	-6.03	23.38	36.00	-12.62

Table 80 - ISED Maximum Conducted (peak) Output Power Results

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISED RSS-247, Limit Clause 5.4 (d)

For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.



2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU002	5759	12	05-Jul-2023
USB Power Sensor	Boonton	RTP5008	5830	12	07-Jul-2023
USB Power Sensor	Boonton	RTP5008	5832	12	07-Jul-2023
USB Power Sensor	Boonton	RTP5008	5833	12	07-Jul-2023

Table 81

O/P Mon – Output Monitored using calibrated equipment



2.7 Spurious Radiated Emissions

2.7.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.209
ISED RSS-247, Clause 3.3 and 5.5
ISED RSS-GEN, Clause 6.13 and 8.9

2.7.2 Equipment Under Test and Modification State

A2780, S/N: FWC3JLYYHC - Modification State 0

2.7.3 Date of Test

24-September-2022 to 27-September-2022

2.7.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5 to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.2. The EUT was placed on the non-conducting platform in a manner typical of a normal installation.

Ports on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4. For EUT's with multiple connectors of the same type, additional interconnecting cables were connected, and pre-scans performed to determine whether the level of the emissions were increased by >2 dB.

In the 30 MHz to 1 GHz range pre-scans were only performed on the mid channel (2441 MHz) only.

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

Above 18 GHz, the measurement distance was reduced to 1 m. The limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

At a measurement distance of 1 meter the limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

Where formal measurements have been necessary, the results have been presented in the emissions table.

2.7.5 Test Setup Diagram

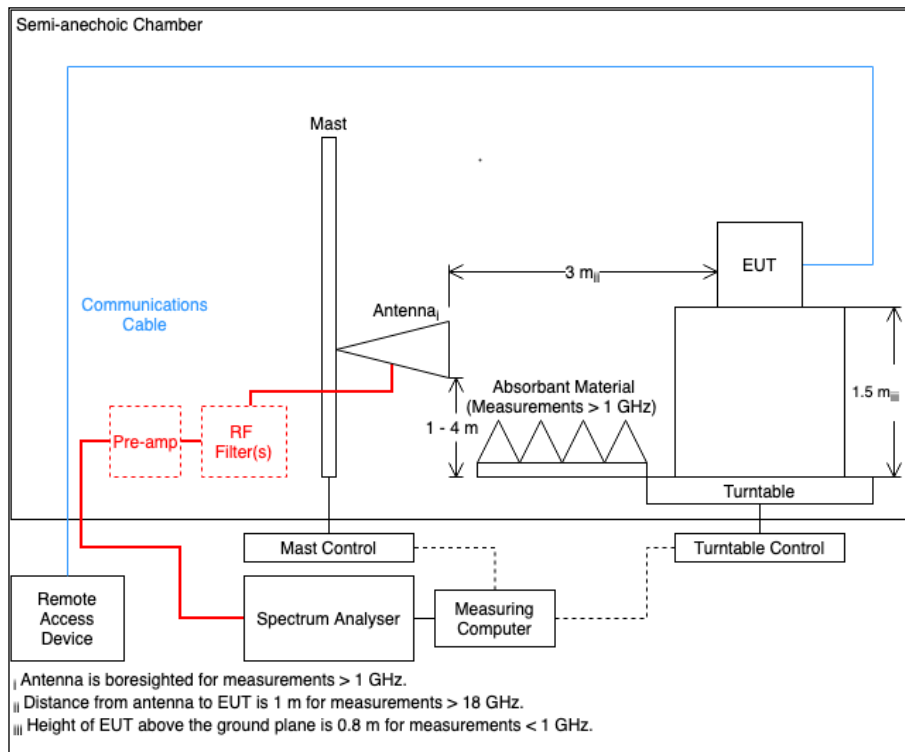


Figure 109

2.7.6 Environmental Conditions

Ambient Temperature	22.5 - 23.2 °C
Relative Humidity	38.2 - 46.7 %



2.7.7 Test Results

2.4 GHz Bluetooth - FHSS

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
279.987	27.20	46.00	-18.80	Q-Peak	83	110	Horizontal

Table 82 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

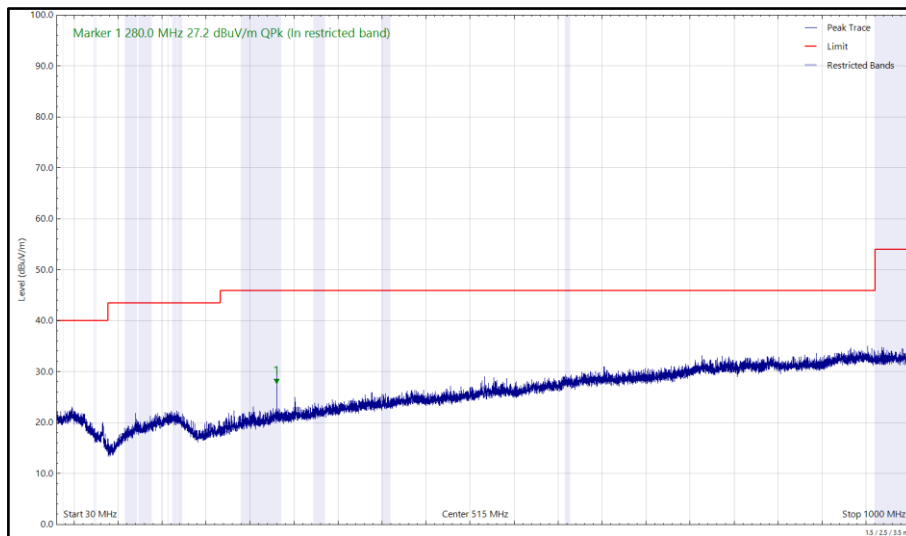


Figure 110 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

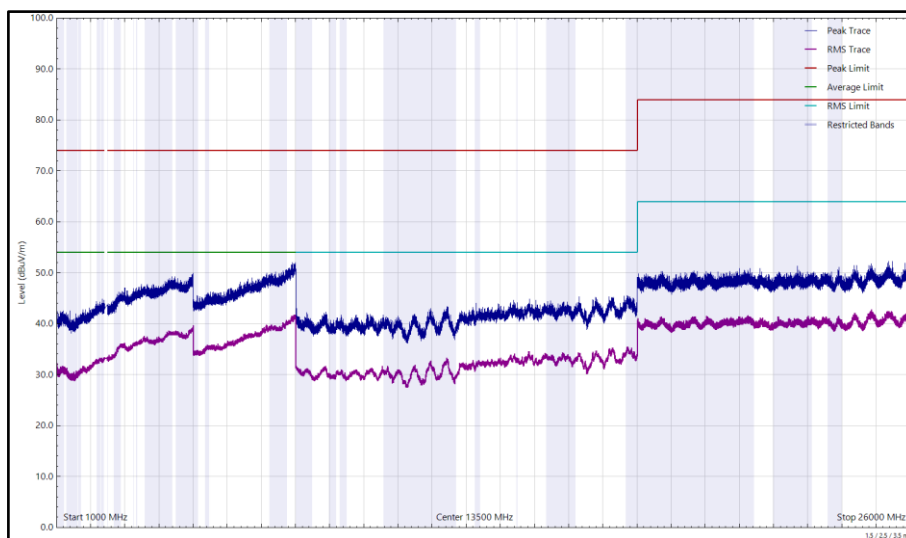


Figure 111 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

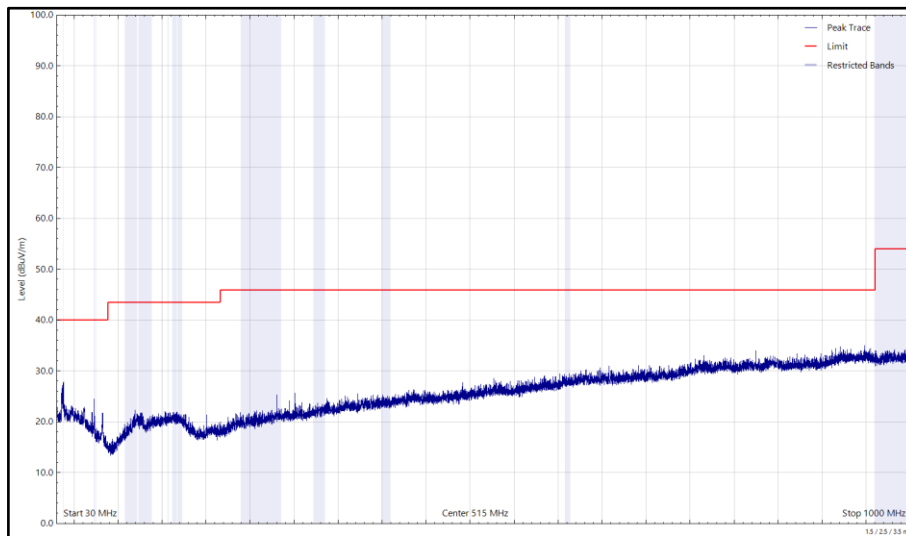


Figure 112 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

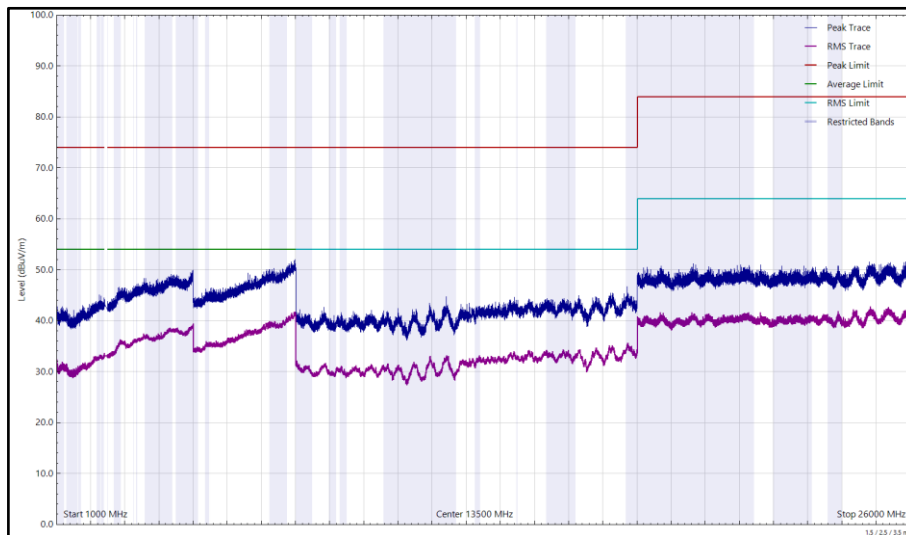


Figure 113 - 2441 MHz (CH39), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
280.011	27.58	46.00	-18.42	Q-Peak	97	102	Horizontal

Table 83 - 2441 MHz (CH39), DH5, iPA, Core 2, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

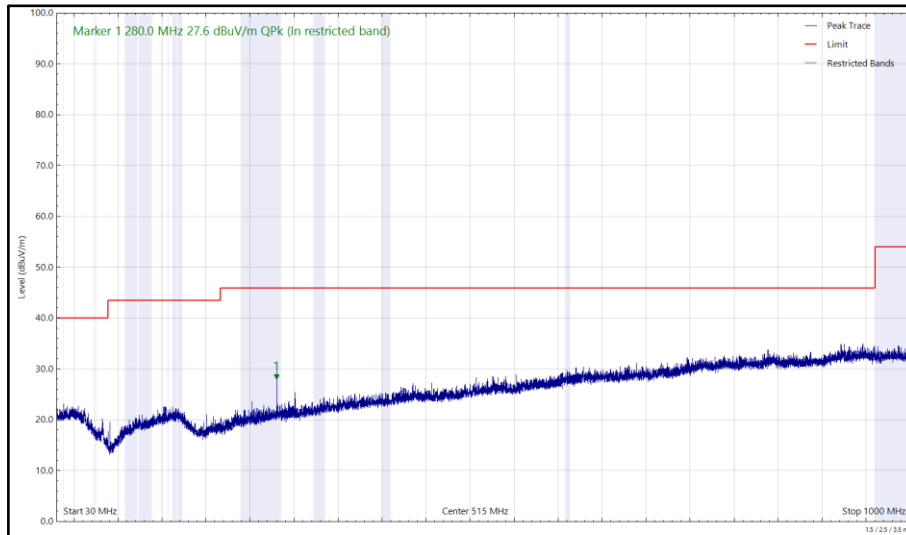


Figure 114 - 2441 MHz (CH39), DH5, iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

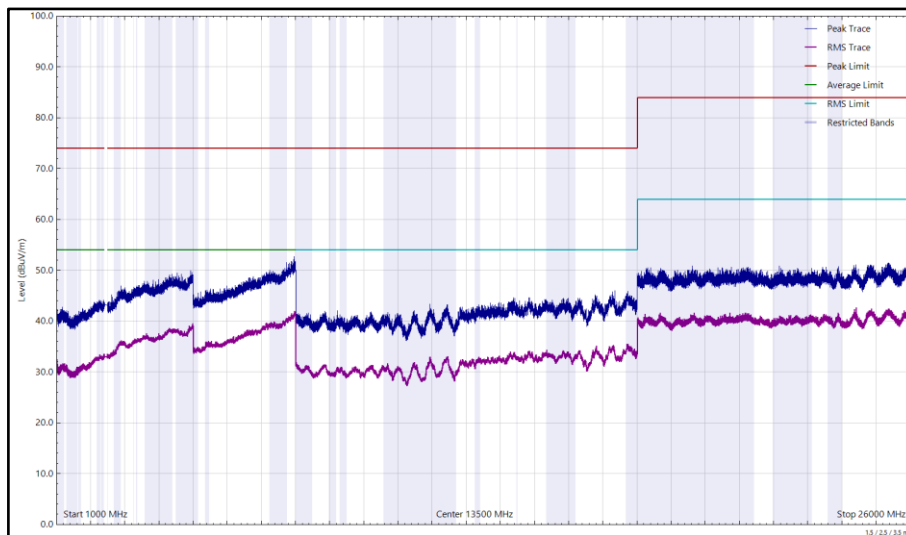


Figure 115 - 2441 MHz (CH39), DH5, iPA, Core 2, 1 GHz to 26 GHz, Horizontal

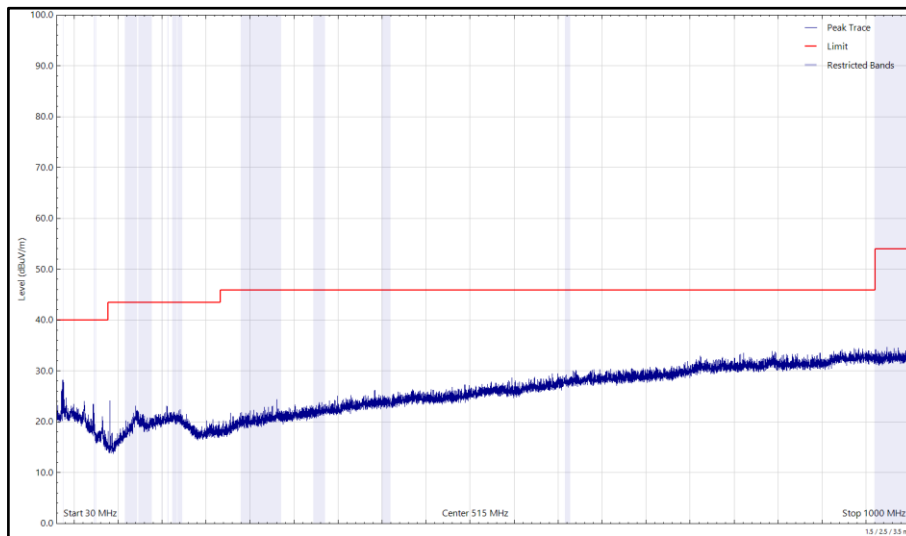


Figure 116 - 2441 MHz (CH39), DH5, iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

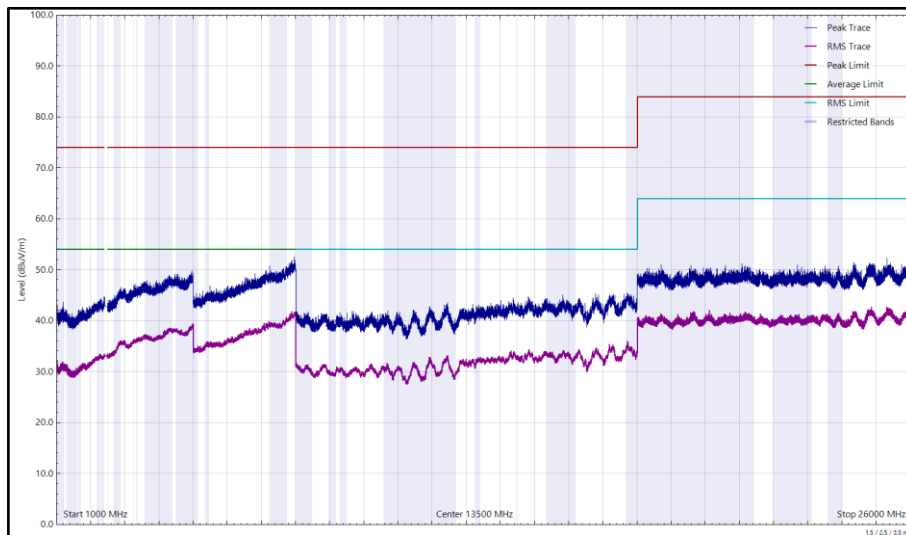


Figure 117 - 2441 MHz (CH39), DH5, iPA, Core 2, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
279.997	28.63	46.00	-17.37	Q-Peak	113	106	Horizontal

Table 84 - 2441 MHz (CH39), 2-DH5, ePA, Core 0 + Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

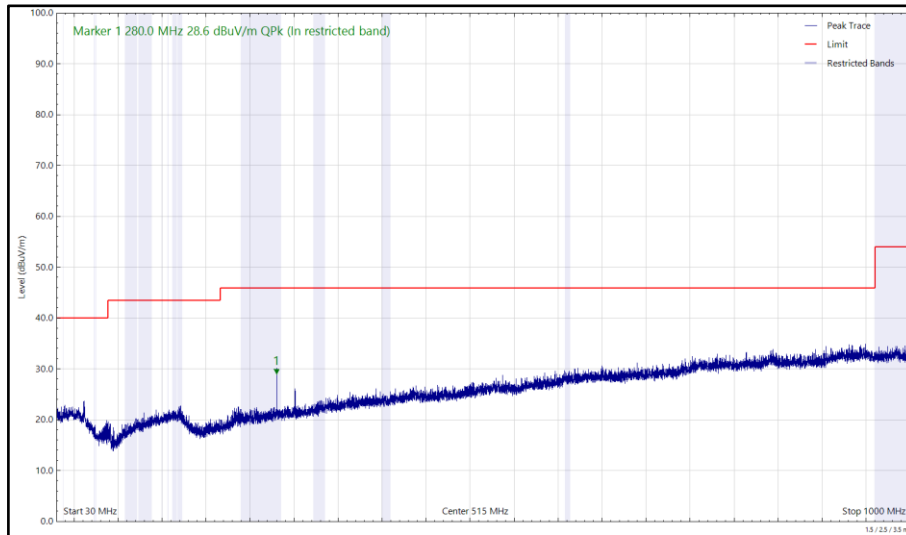


Figure 118 - 2441 MHz (CH39), 2-DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

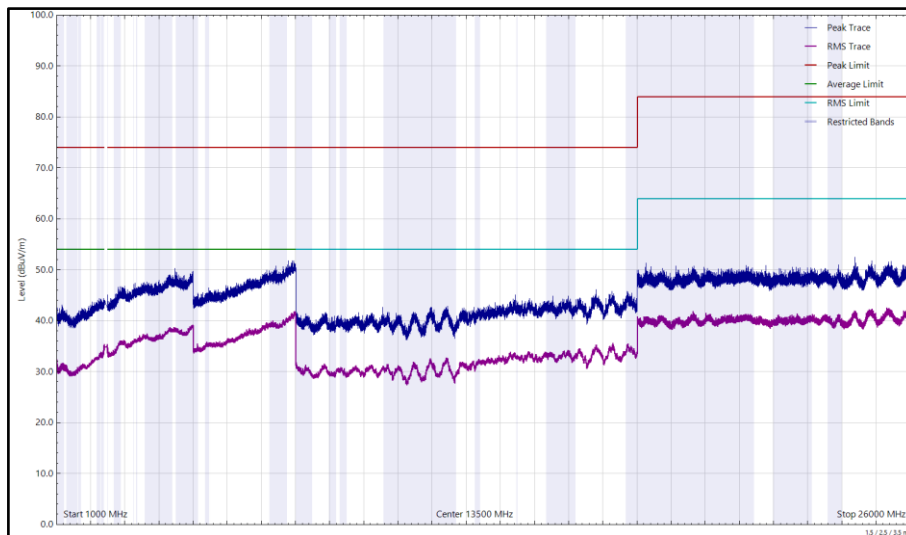


Figure 119 - 2441 MHz (CH39), 2-DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

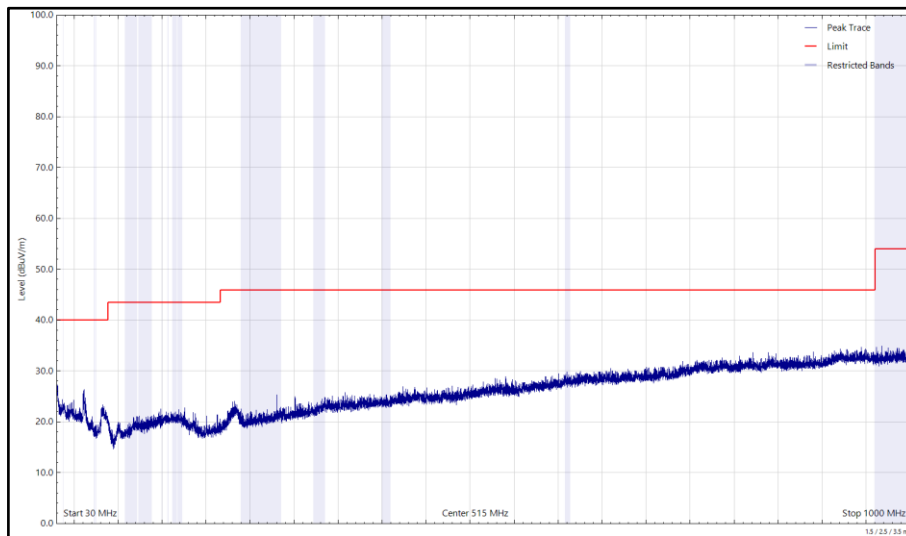


Figure 120 - 2441 MHz (CH39), 2-DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

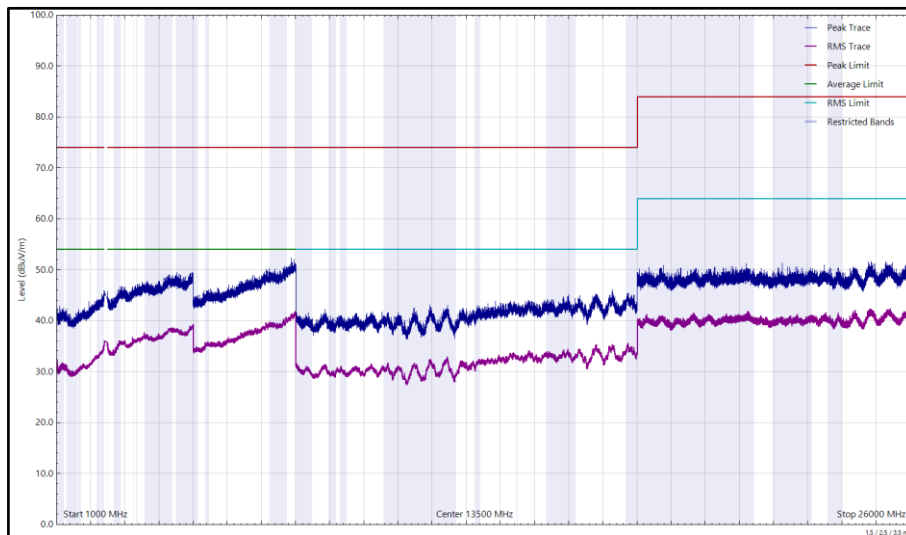


Figure 121 - 2441 MHz (CH39), 2-DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 85 - 2402 MHz (CH0), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

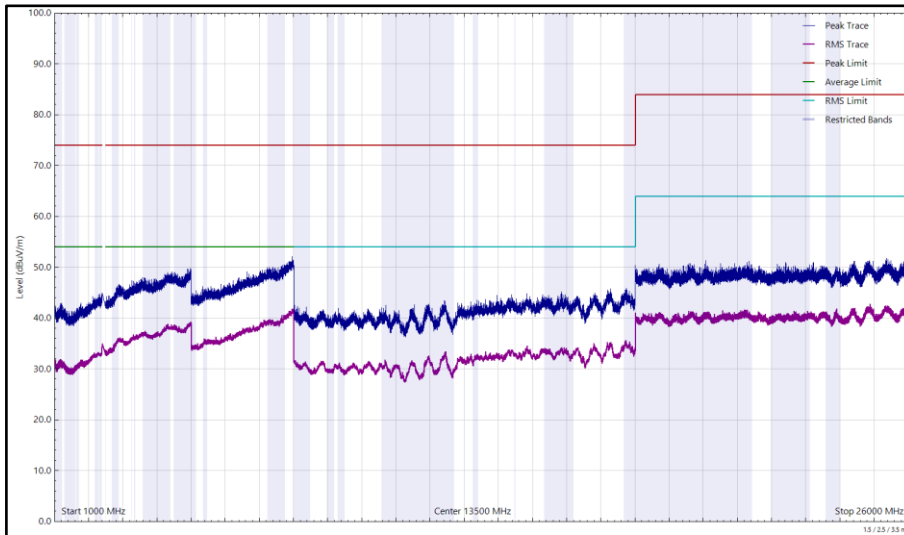


Figure 122 - 2402 MHz (CH0), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

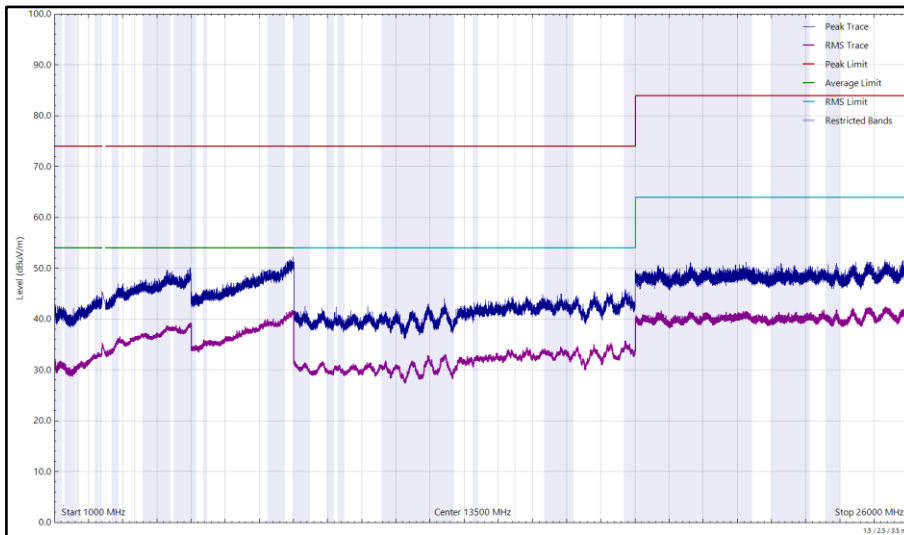


Figure 123 - 2402 MHz (CH0), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 86 - 2480 MHz (CH78), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

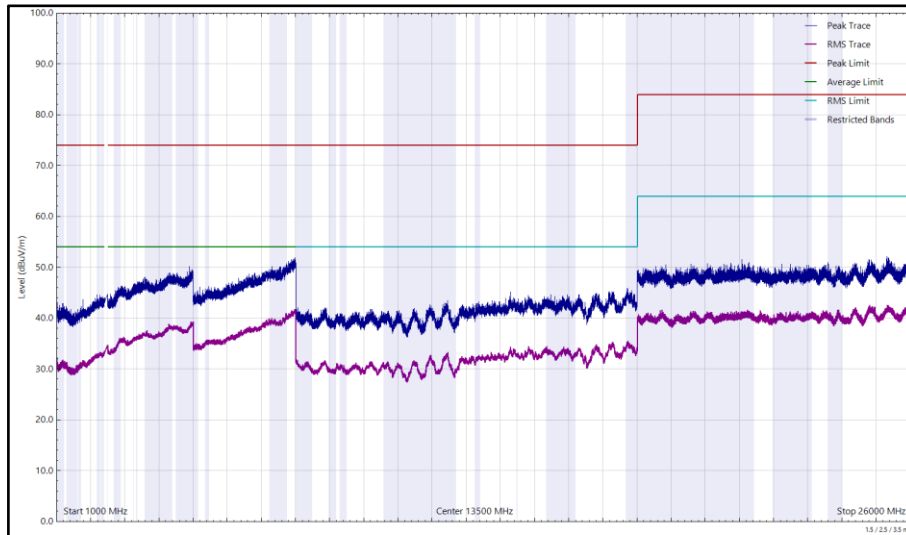


Figure 124 - 2480 MHz (CH78), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

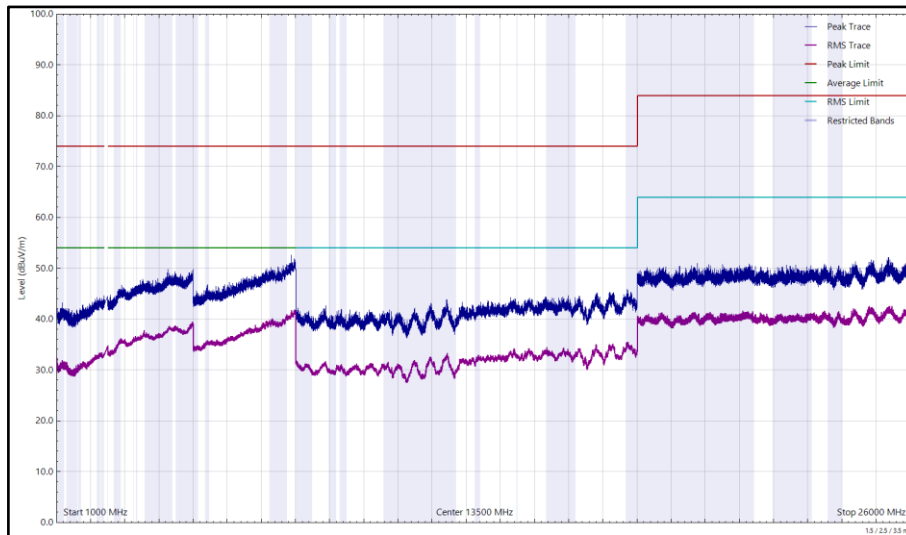


Figure 125 - 2480 MHz (CH78), DH5, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 87 - 2402 MHz (CH0), DH5, iPA, Core 2, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

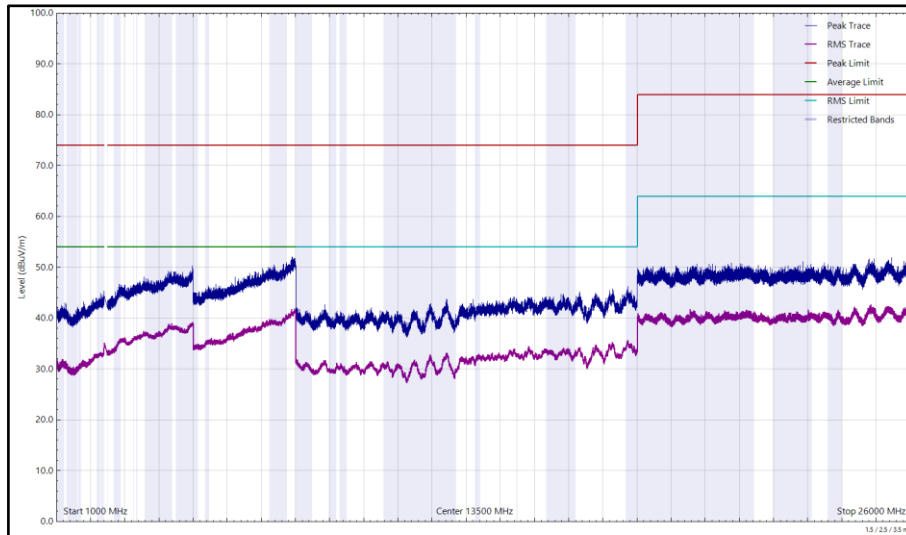


Figure 126 - 2402 MHz (CH0), DH5, iPA, Core 2, 1 GHz to 26 GHz, Horizontal

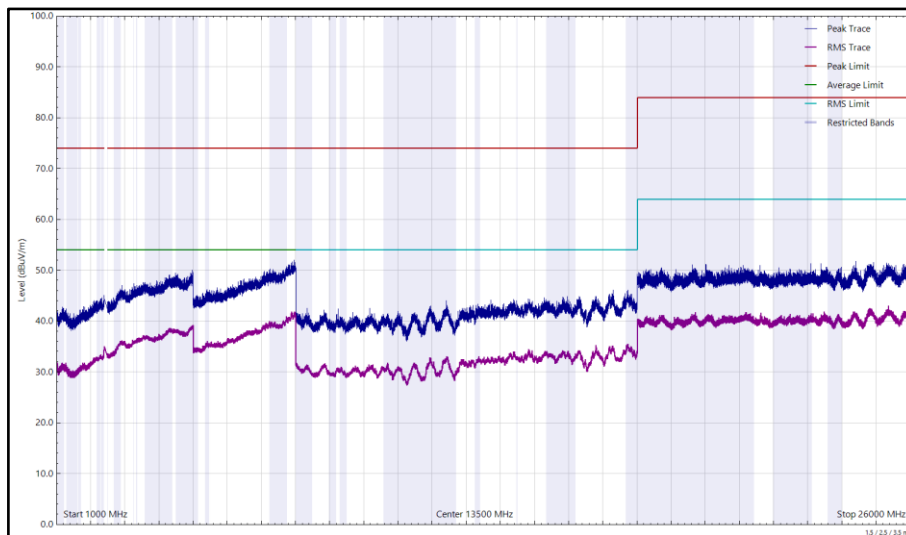


Figure 127 - 2402 MHz (CH0), DH5, iPA, Core 2, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 88 - 2480 MHz (CH78), DH5, iPA, Core 2, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

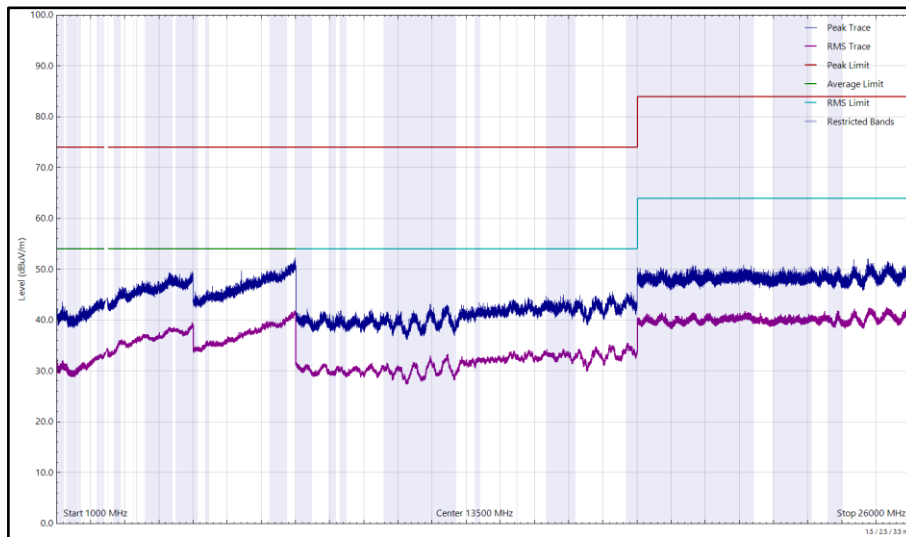


Figure 128 - 2480 MHz (CH78), DH5, iPA, Core 2, 1 GHz to 26 GHz, Horizontal

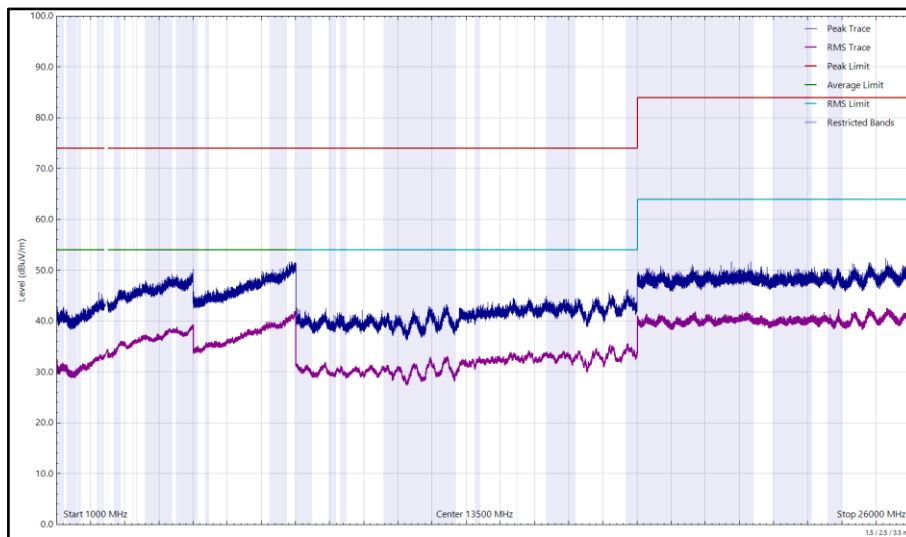


Figure 129 - 2480 MHz (CH78), DH5, iPA, Core 2, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 89 - 2402 MHz (CH0), 2-DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

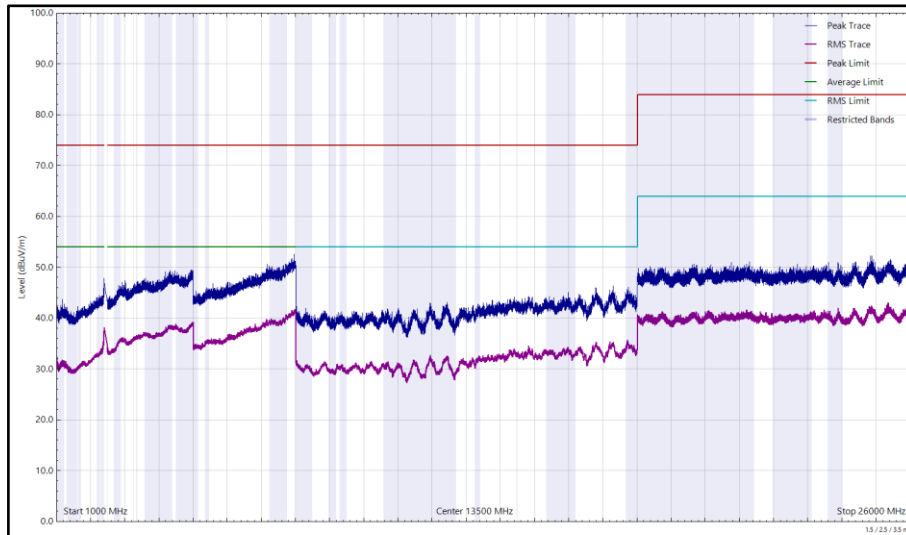


Figure 130 - 2402 MHz (CH0), 2-DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

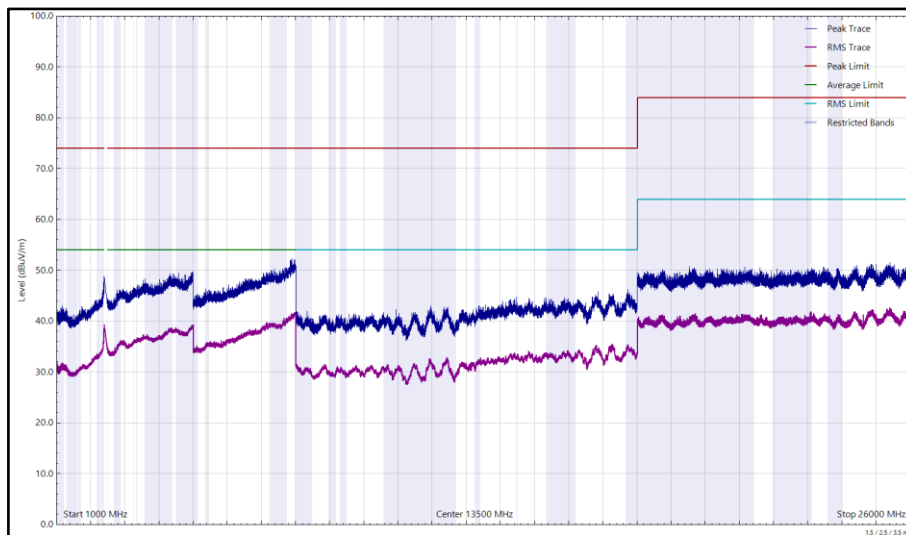


Figure 131 - 2402 MHz (CH0), 2-DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 90 - 2480 MHz (CH78), 2-DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

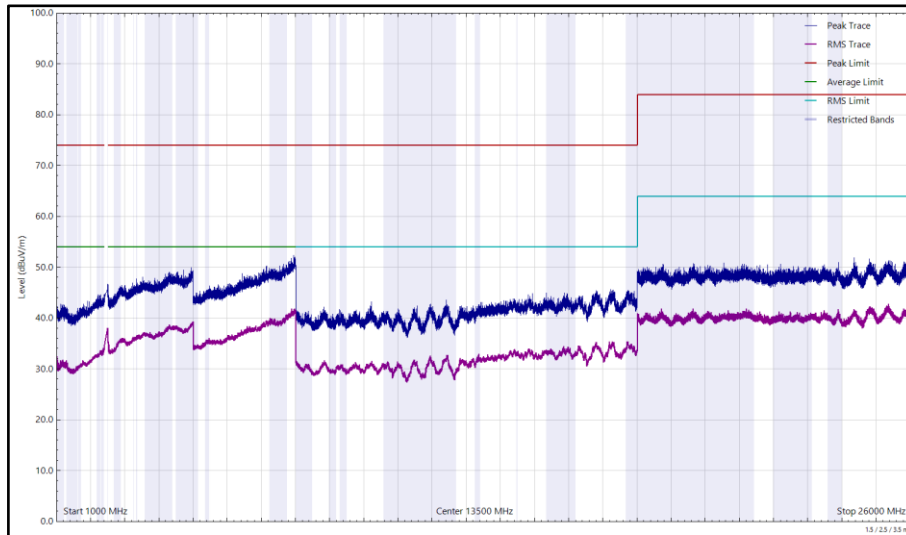


Figure 132 - 2480 MHz (CH78), 2-DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

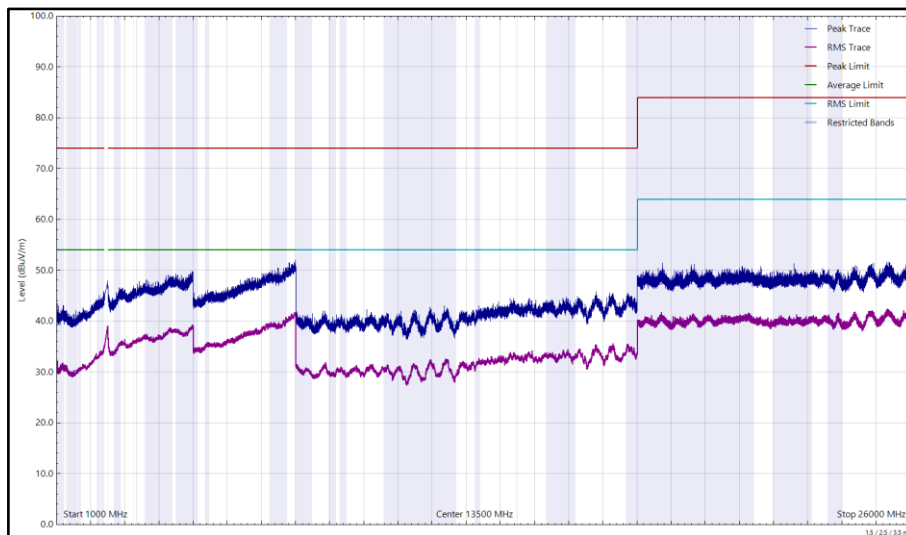


Figure 133 - 2480 MHz (CH78), 2-DH5, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-GEN, clause 8.10, must also comply with the radiated emission limits specified in RSS-GEN clause 8.9.

2.7.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 16.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.1.4	5125	-	Software
Cable (18GHz)	Junkosha	MWX221-04000NMSNMS/B	5262	12	04-Aug-2023
Cable (18 GHz)	Junkosha	MWX221-04000NMSNMS/B	5263	12	24-Jan-2023
Test Receiver	Rohde & Schwarz	ESW44	5914	12	21-Feb-2023
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5935	12	14-May-2023
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5940	12	29-May-2023
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5944	24	03-Feb-2024
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
3m Semi-Anechoic Chamber	Schaffner	RF Chamber 16	5972	36	24-May-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5974	-	TU



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Turntable	Maturo Gmbh	TT1.5SI	5975	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6018	12	06-Jun-2023
Cable (SMA to SMA 3m)	Junkosha	MWX221-03000AMSAMS/A	6021	12	06-Jun-2023
Cable (N to N 3m)	Junkosha	MWX221-03000NMSNMS/A	6025	12	05-Jun-2023
Cable (SMA to SMA 6m)	Junkosha	MWX221-06000AMSAMS/B	6026	12	07-Jun-2023
Cable (N to N 6m)	Junkosha	MWX221-06000NMSNMS/B	6027	12	05-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	26-Jun-2023
Digital Multimeter	Fluke	115	6146	12	16-Jun-2023
Humidity & Temperature meter	R.S Components	1364	6148	12	17-Jun-2023
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6188	24	02-Jun-2024
SAC Switch Unit	TUV SUD	SSU002	6190	12	08-Aug-2023
8GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6196	12	15-Jul-2023
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6200	12	19-Jul-2023
Attenuator 4dB	Pasternack	PE7074-4	6203	24	16-Jul-2024
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6220	12	10-Aug-2023

Table 91

TU – Traceability Unscheduled



2.8 Authorised Band Edges

2.8.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
ISED RSS-247, Clause 5.5

2.8.2 Equipment Under Test and Modification State

A2780, S/N: FWC3JLYYHC - Modification State 0

2.8.3 Date of Test

10-August-2022 to 11-August-2022

2.8.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

2.8.5 Environmental Conditions

Ambient Temperature	22.5 - 23.0 °C
Relative Humidity	42.4 - 65.3 %



2.8.6 Test Results

2.4 GHz Bluetooth - FHSS

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	GFSK	1	DH5	2402	2400.0	-53.34
Static	$\pi/4$ DQPSK	1	2-DH5	2402	2400.0	-46.08
Static	8-DPSK	1	3-DH5	2402	2400.0	-46.06
Hopping	GFSK	1	DH5	2402	2400.0	-67.26
Hopping	$\pi/4$ DQPSK	1	2-DH5	2402	2400.0	-51.44
Hopping	8-DPSK	1	3-DH5	2402	2400.0	-51.35

Table 92 - Authorised Band Edge Results

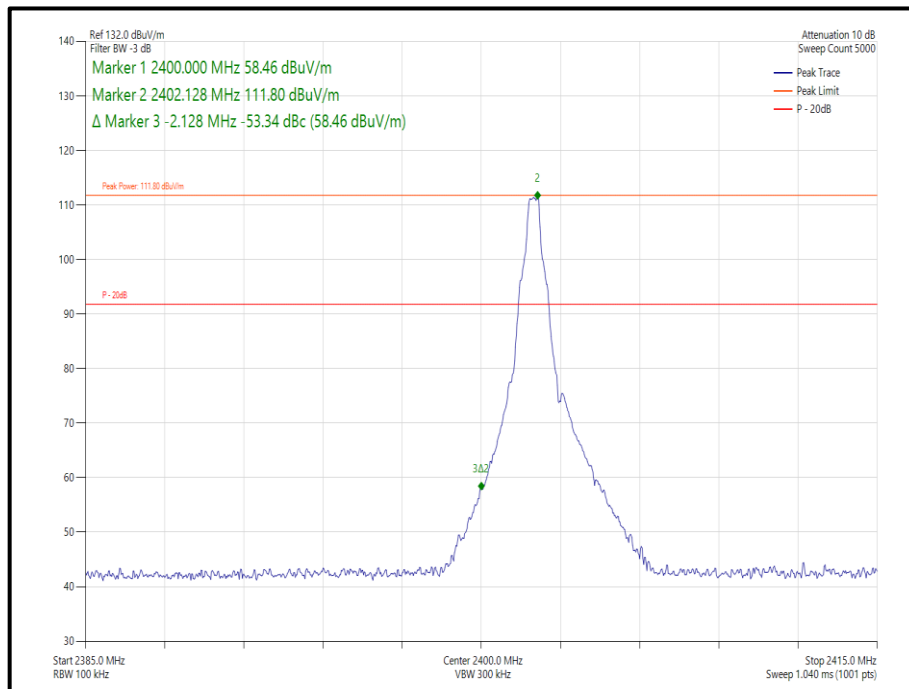


Figure 134 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

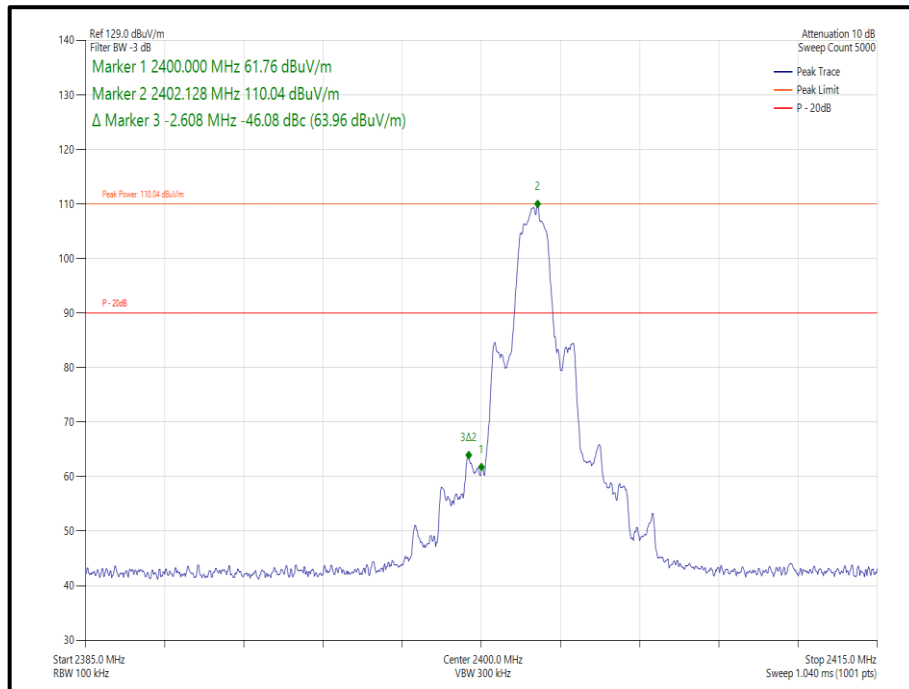


Figure 135 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

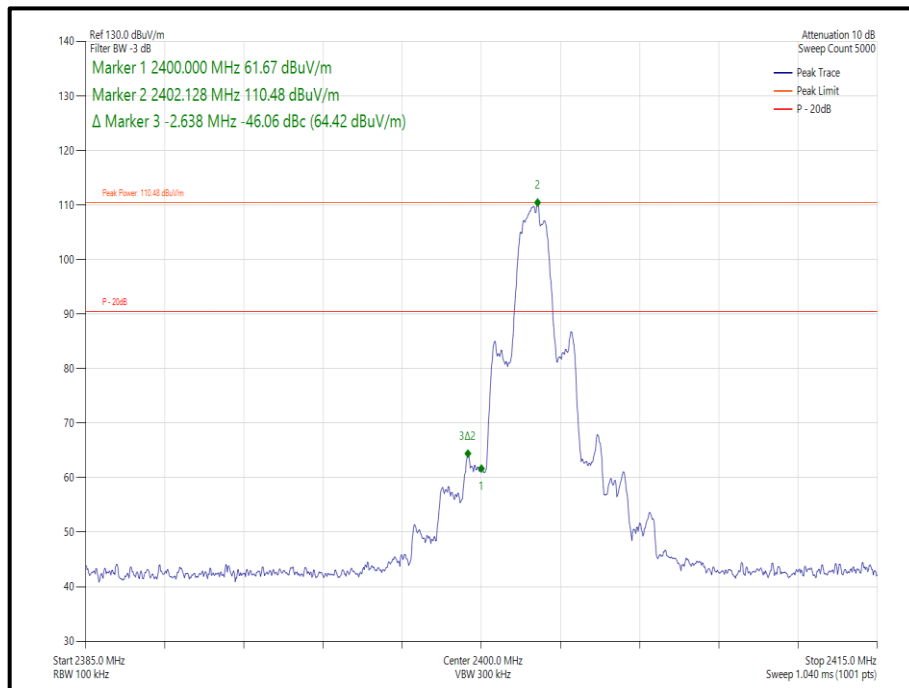


Figure 136 - Static - 8-DPSK/3-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

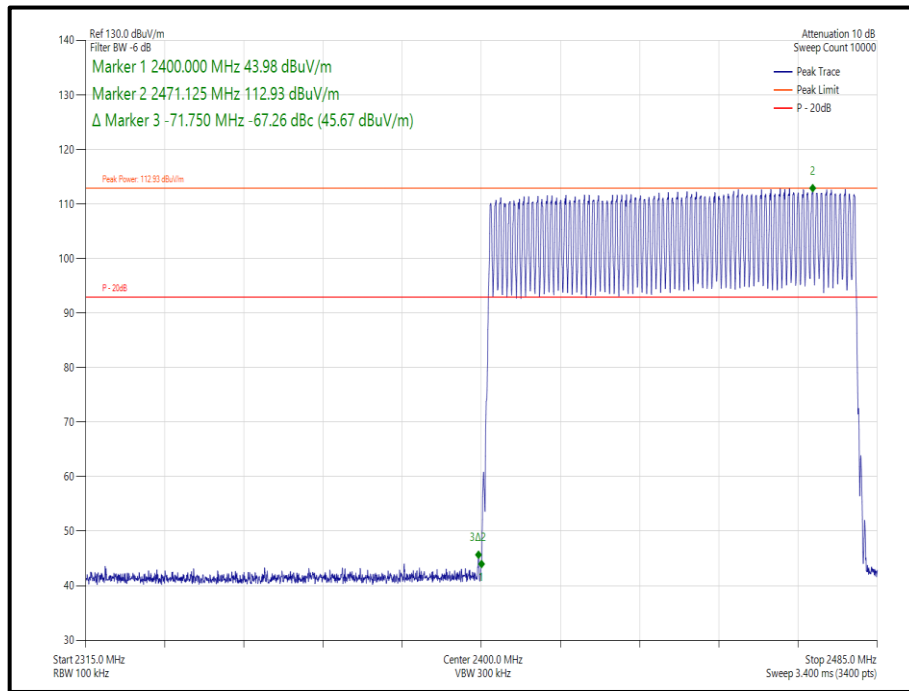


Figure 137 - Hopping - GFSK/DH5 - Band Edge Frequency 2400.0 MHz

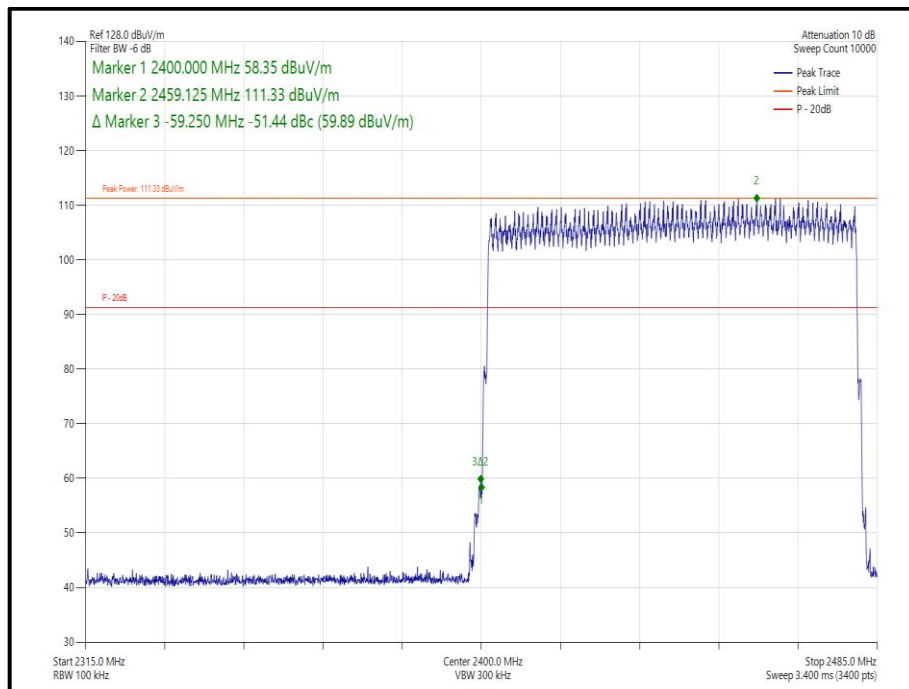


Figure 138 - Hopping - $\pi/4$ DQPSK/2-DH5 - Band Edge Frequency 2400.0 MHz

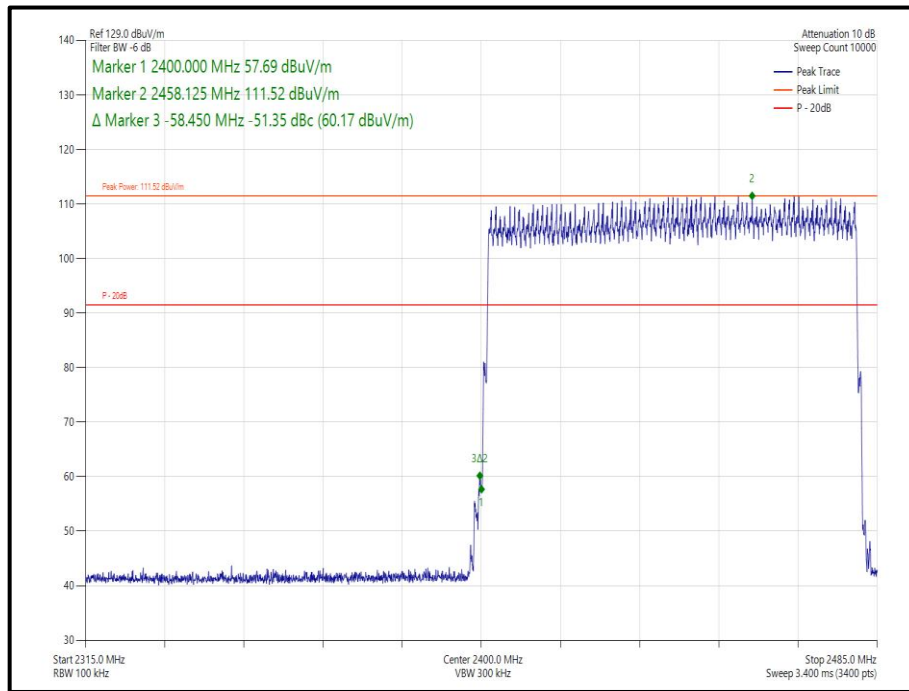


Figure 139 - Hopping - 8-DPSK/3-DH5 - Band Edge Frequency 2400.0 MHz



2.4 GHz Bluetooth (FHSS)

ePA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	$\pi/4$ DQPSK	1	2-DH5	2402	2400.0	-66.11
Static	8-DPSK	1	3-DH5	2402	2400.0	-65.36
Hopping	$\pi/4$ DQPSK	1	2-DH5	2402	2400.0	-67.88
Hopping	8-DPSK	1	3-DH5	2402	2400.0	-68.05

Table 93 - Authorised Band Edge Results

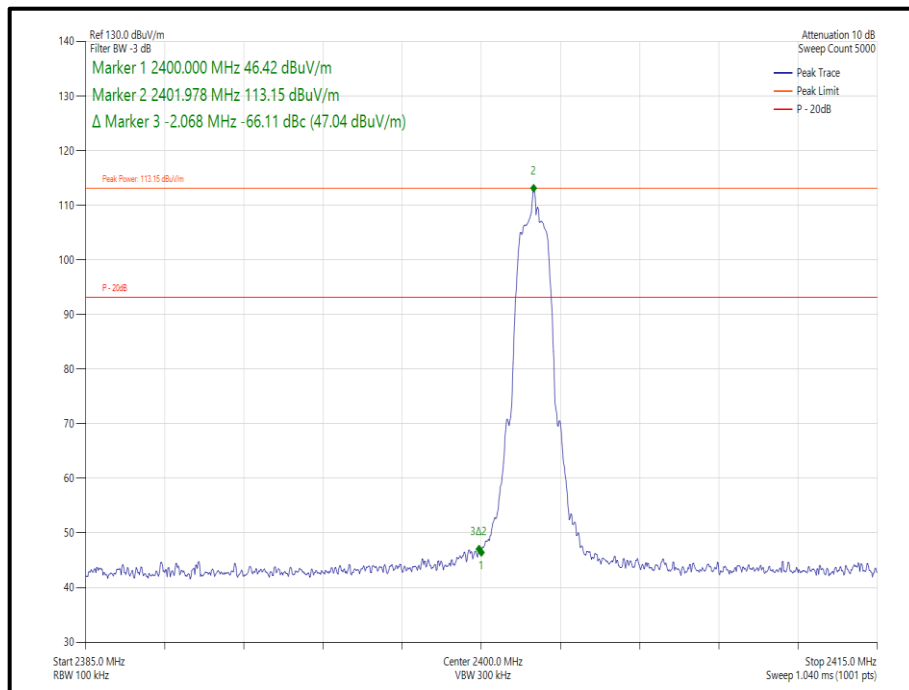


Figure 140 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

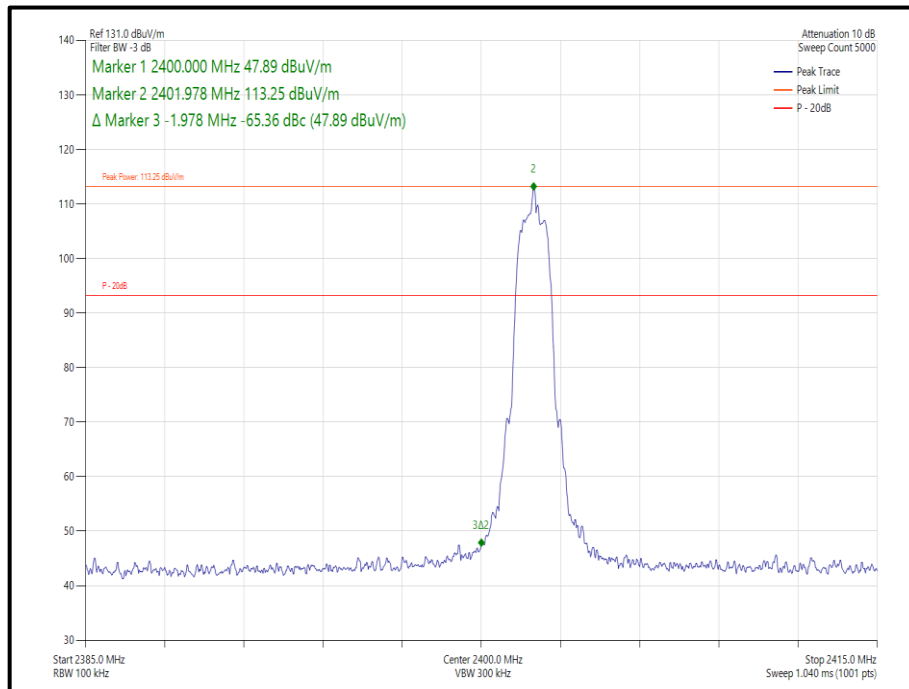


Figure 141 - Static - 8-DPSK/3-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

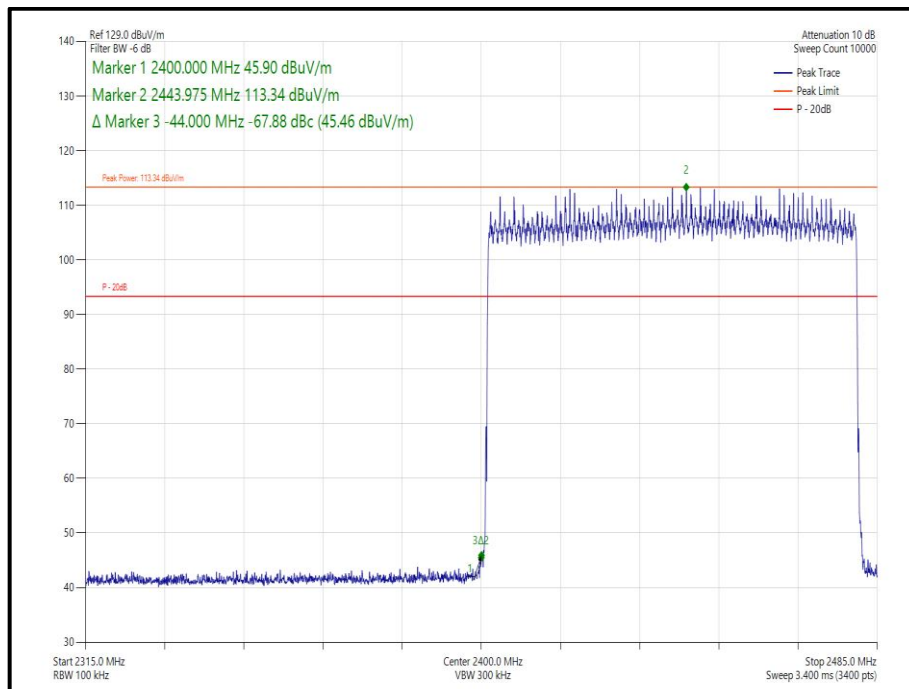


Figure 142 - Hopping - $\pi/4$ DQPSK/2-DH5 - Band Edge Frequency 2400.0 MHz

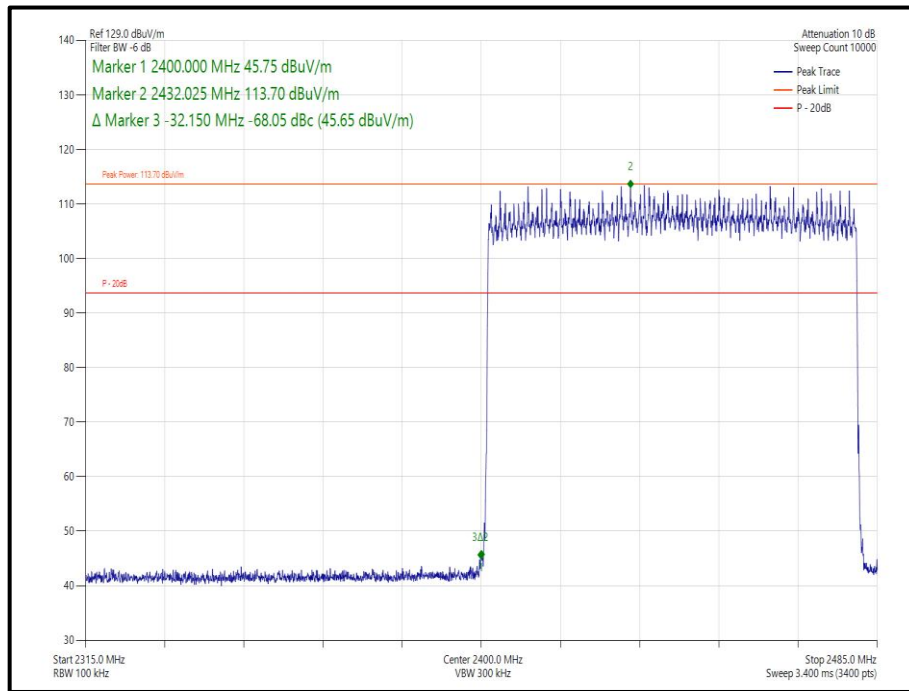


figure 143 - Hopping - 8-DPSK/3-DH5 - Band Edge Frequency 2400.0 MHz



2.4 GHz Bluetooth (FHSS)

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	GFSK	2	DH5	2402	2400.0	-57.93
Static	$\pi/4$ DQPSK	2	2-DH5	2402	2400.0	-52.50
Static	8-DPSK	2	3-DH5	2402	2400.0	-54.20
Hopping	GFSK	2	DH5	2402	2400.0	-68.90
Hopping	$\pi/4$ DQPSK	2	2-DH5	2402	2400.0	-56.85
Hopping	8-DPSK	2	3-DH5	2402	2400.0	-56.75

Table 94 - Authorised Band Edge Results

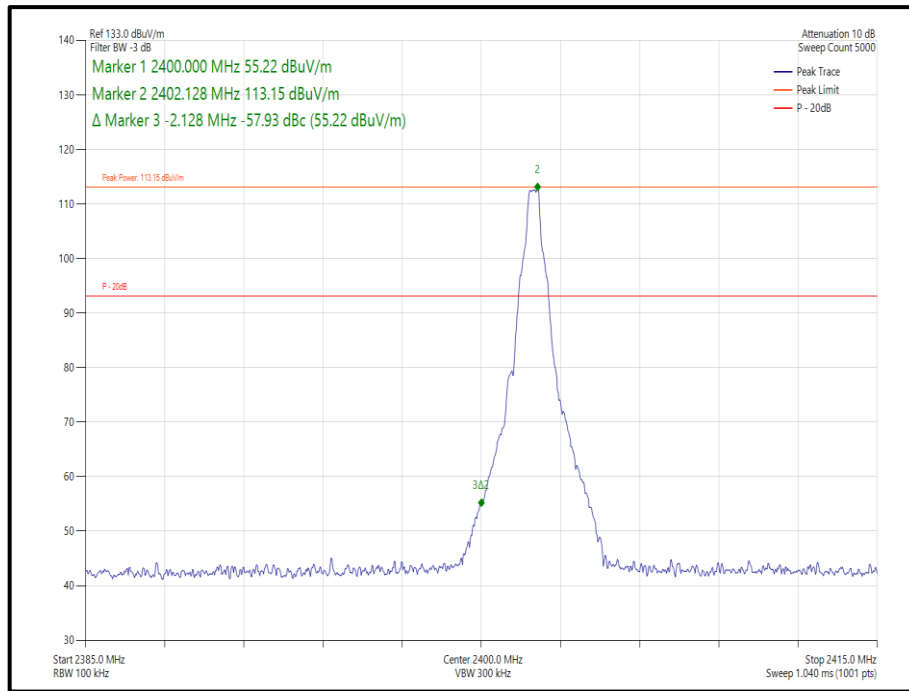


Figure 144 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

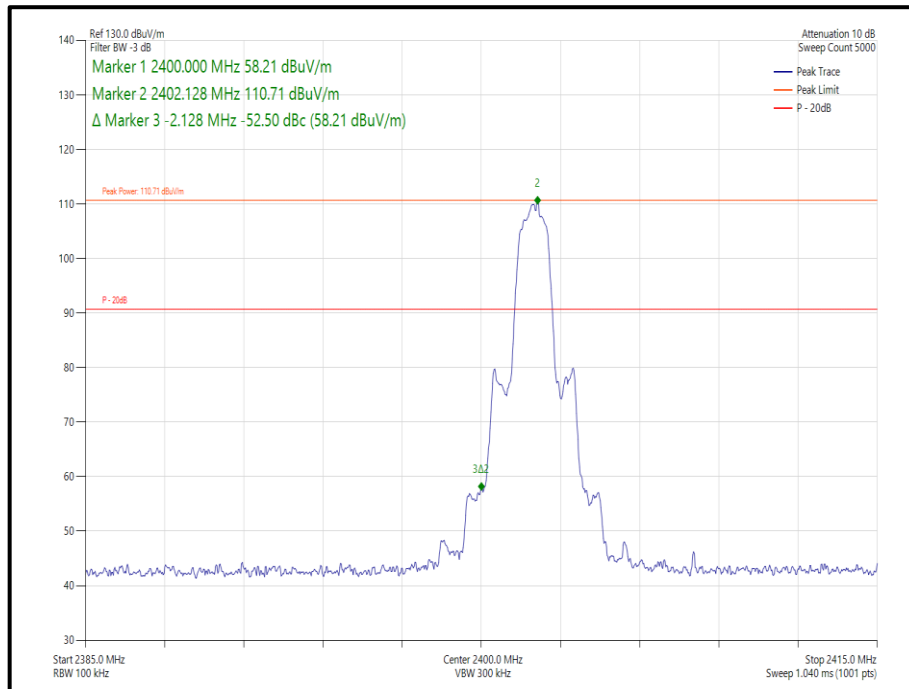


Figure 145 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

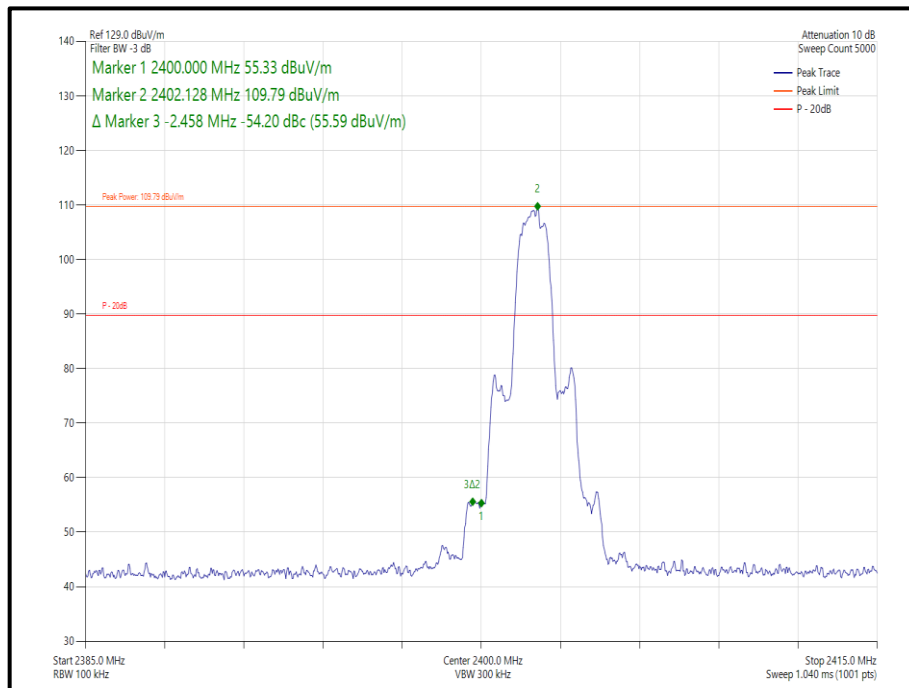


Figure 146 - Static - 8-DPSK/3-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

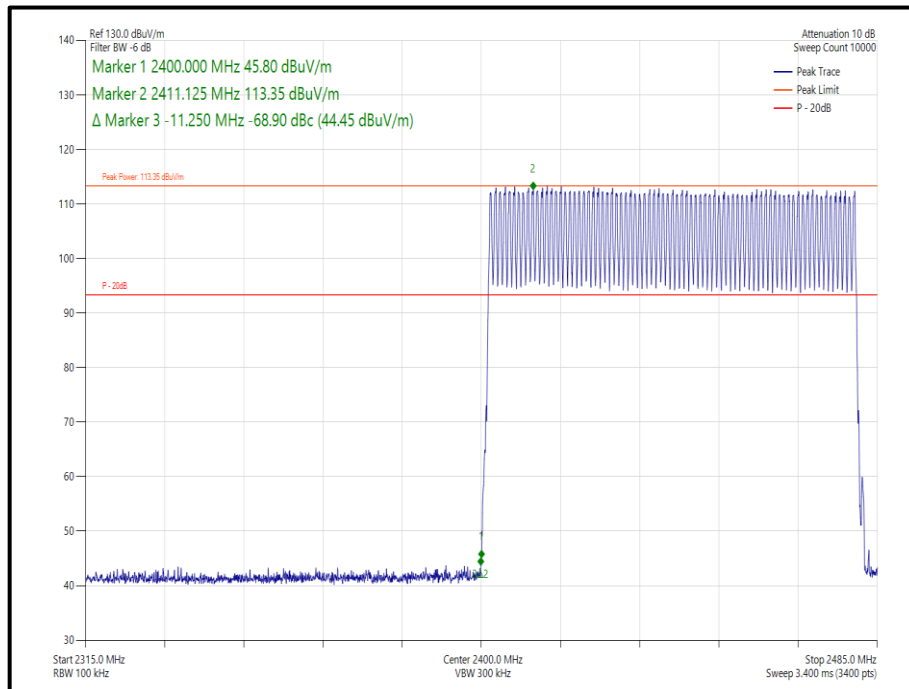


Figure 147 - Hopping - GFSK/DH5 - Band Edge Frequency 2400.0 MHz

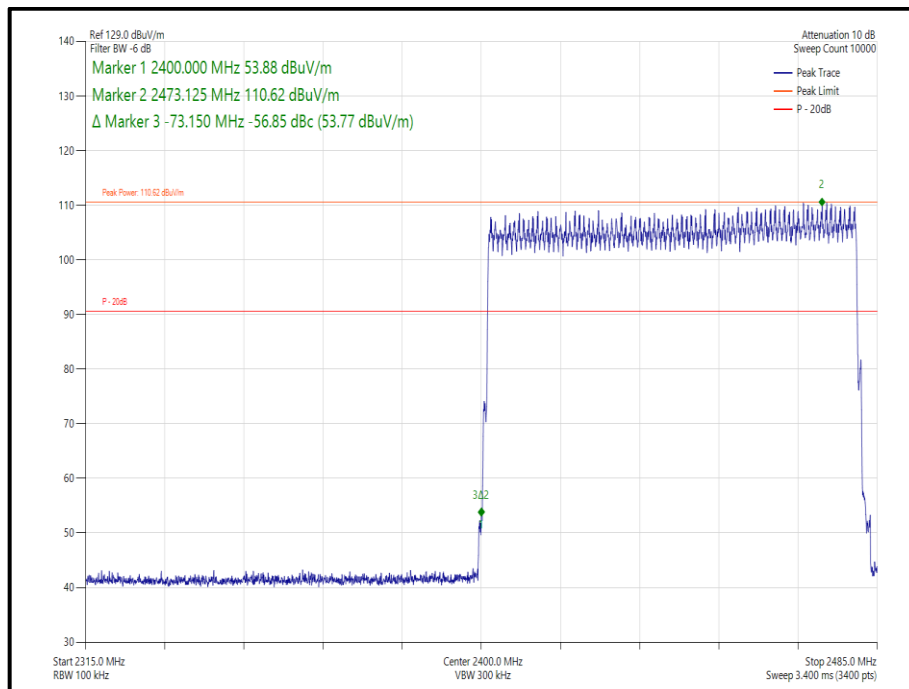


Figure 148 - Hopping - $\pi/4$ DQPSK/2-DH5 - Band Edge Frequency 2400.0 MHz

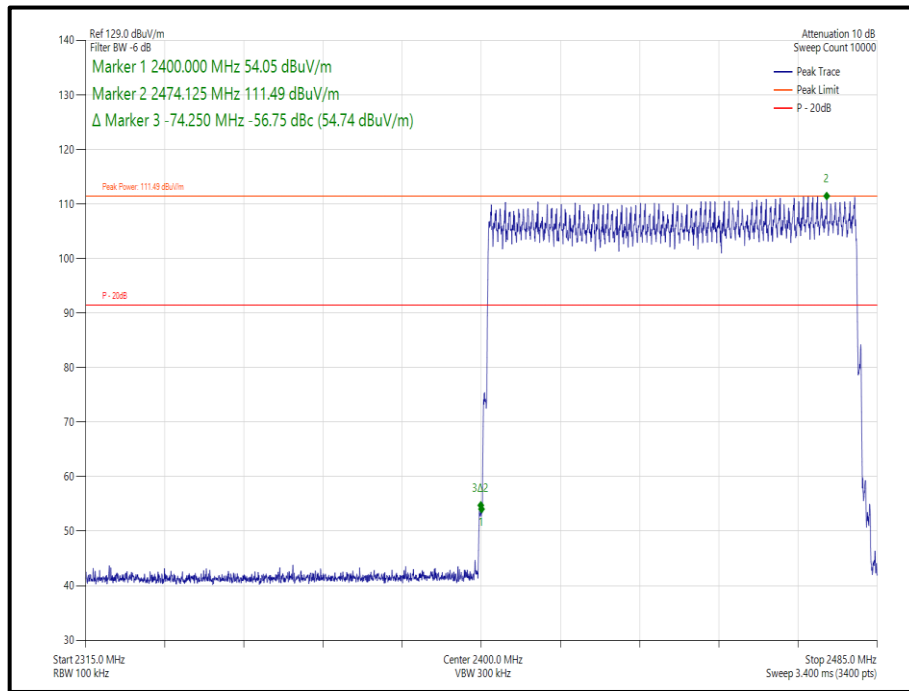


Figure 149 - Hopping - 8-DPSK/3-DH5 - Band Edge Frequency 2400.0 MHz



2.4 GHz Bluetooth (FHSS)

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	GFSK	0-1	DH5	2402	2400.0	-59.45
Static	$\pi/4$ DQPSK	0-1	2-DH5	2402	2400.0	-55.81
Static	8-DPSK	0-1	3-DH5	2402	2400.0	-56.44
Hopping	GFSK	0-1	DH5	2402	2400.0	-71.58
Hopping	$\pi/4$ DQPSK	0-1	2-DH5	2402	2400.0	-60.38
Hopping	8-DPSK	0-1	3-DH5	2402	2400.0	-60.53

Table 95 - Authorised Band Edge Results

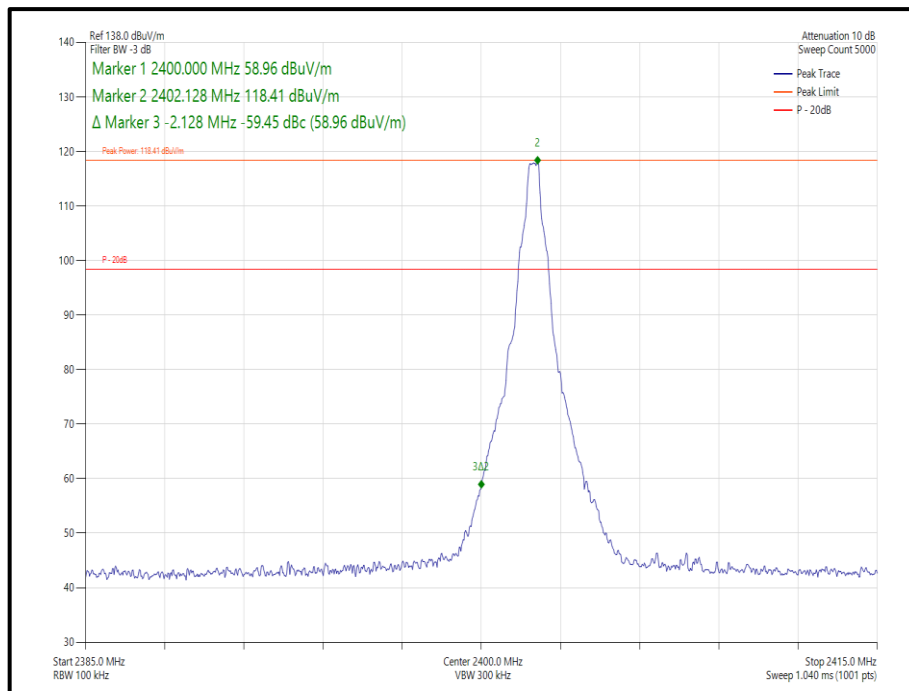


Figure 150 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

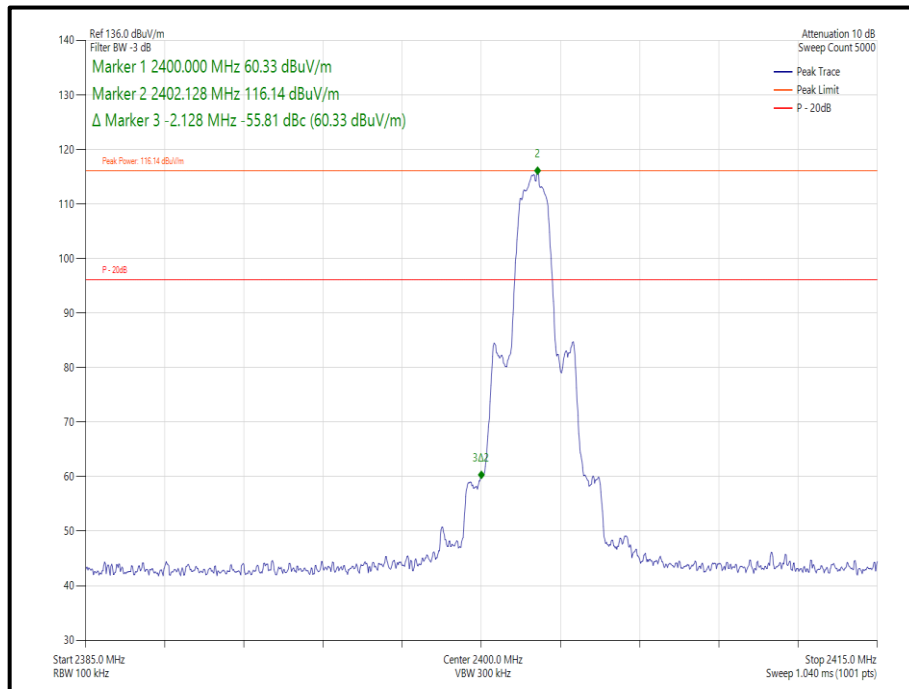


Figure 151 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

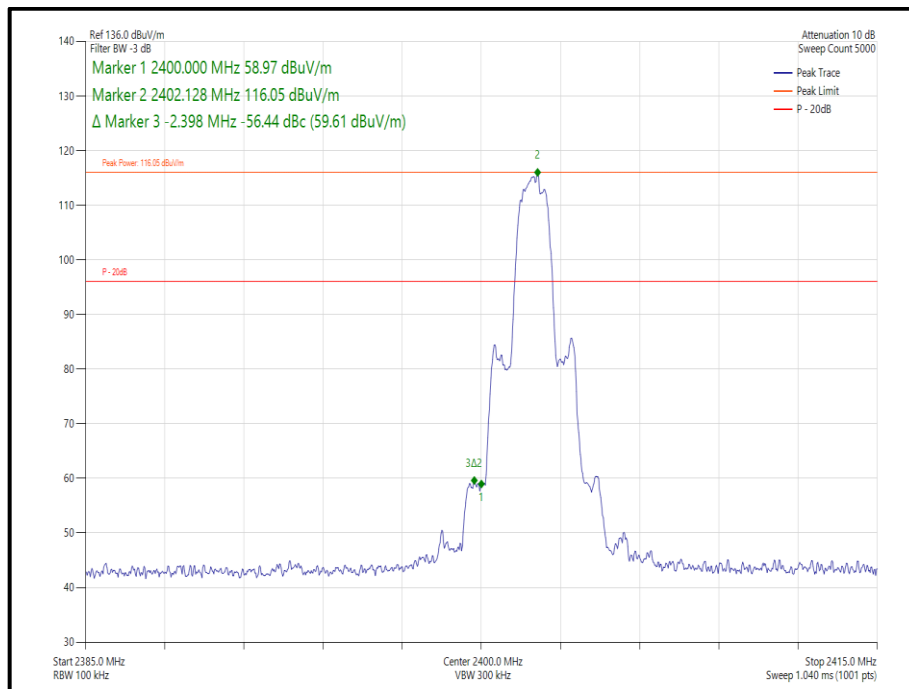


Figure 152 - Static - 8-DPSK/3-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

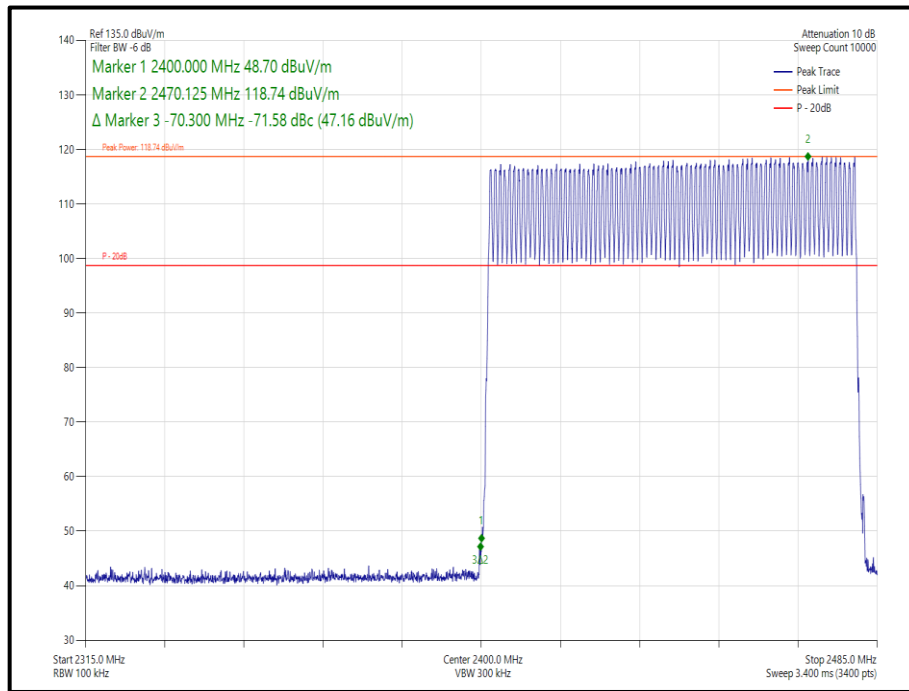


Figure 153 - Hopping - GFSK/DH5 - Band Edge Frequency 2400.0 MHz

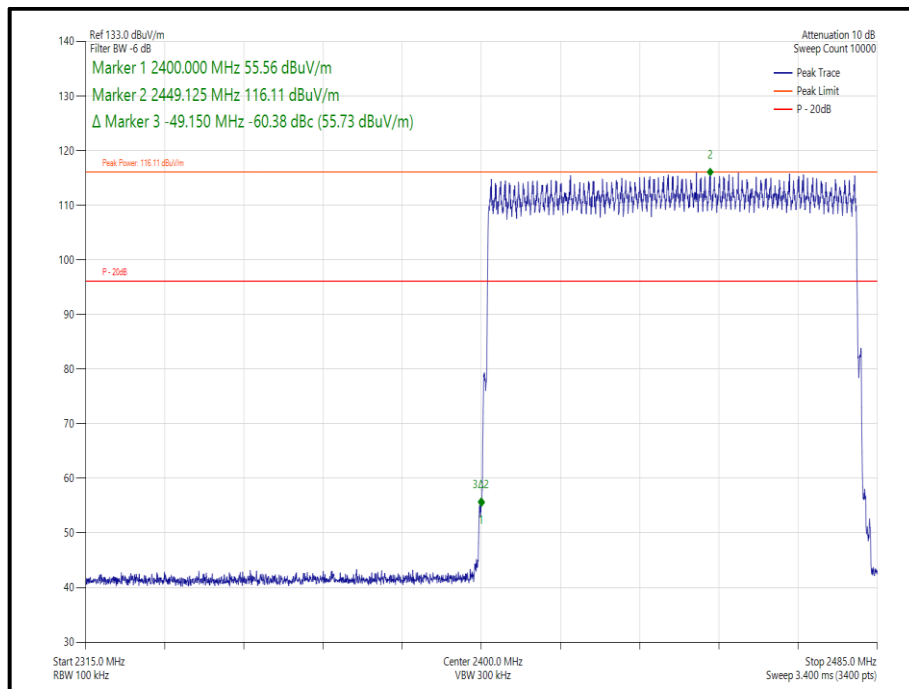


Figure 154 - Hopping - $\pi/4$ DQPSK/2-DH5 - Band Edge Frequency 2400.0 MHz

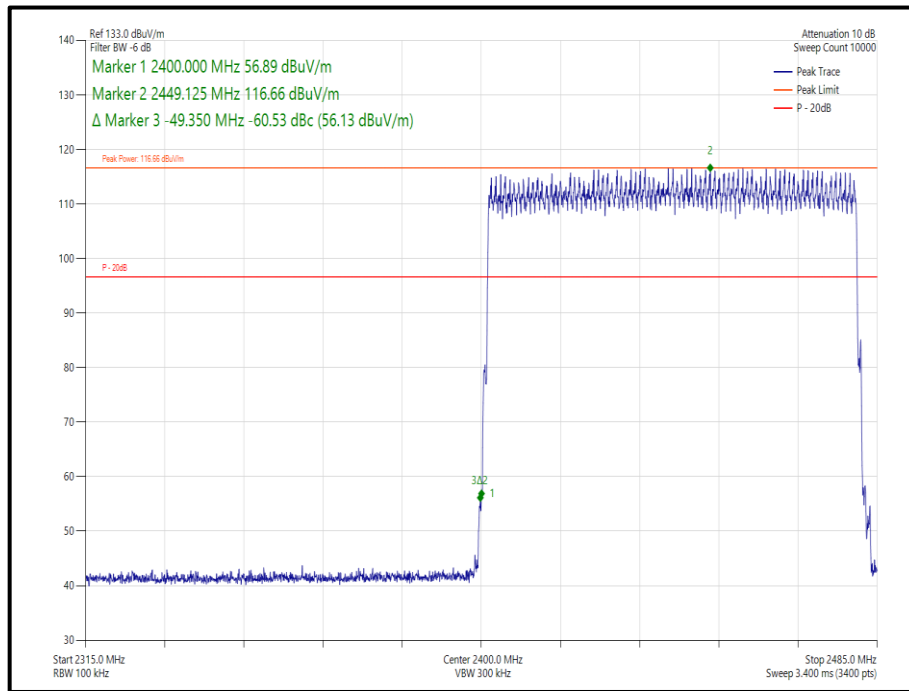


Figure 155 - Hopping - 8-DPSK/3-DH5 - Band Edge Frequency 2400.0 MHz



2.4 GHz Bluetooth (FHSS)

ePA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	$\pi/4$ DQPSK	0-1	2-DH5	2402	2400.0	-66.99
Static	8-DPSK	0-1	3-DH5	2402	2400.0	-66.89
Hopping	$\pi/4$ DQPSK	0-1	2-DH5	2402	2400.0	-69.63
Hopping	8-DPSK	0-1	3-DH5	2402	2400.0	-69.33

Table 96 - Authorised Band Edge Results

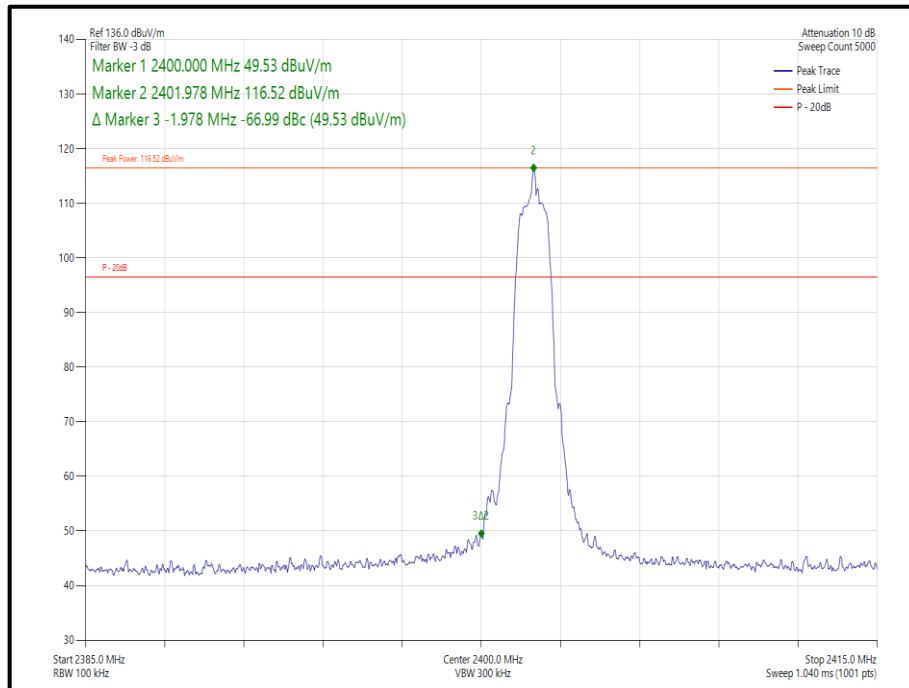


Figure 156 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

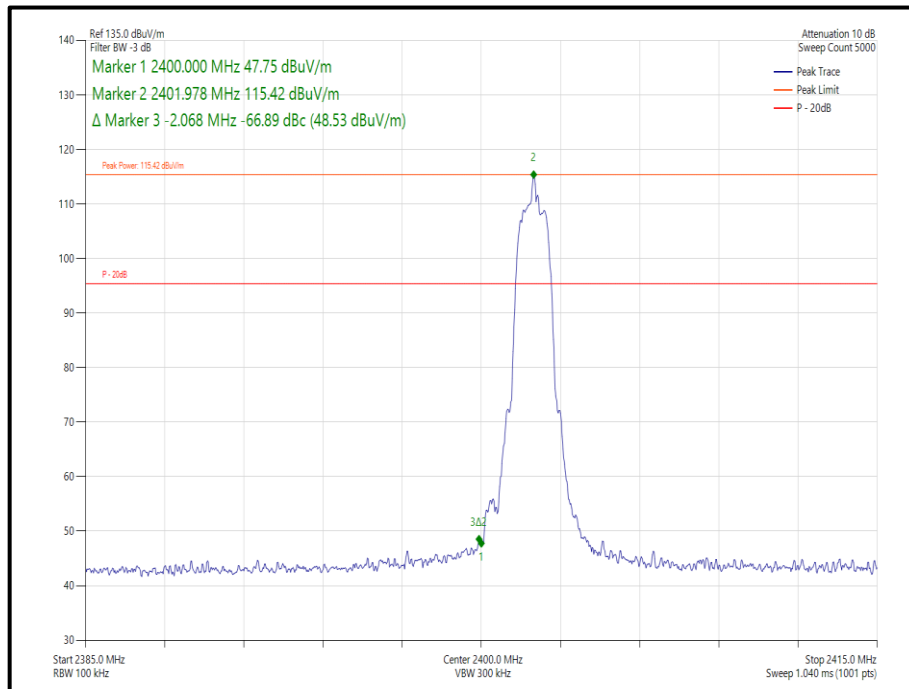


Figure 157 - Static - 8-DPSK/3-DH5 - 2402 MHz - Band Edge Frequency 2400.0 MHz

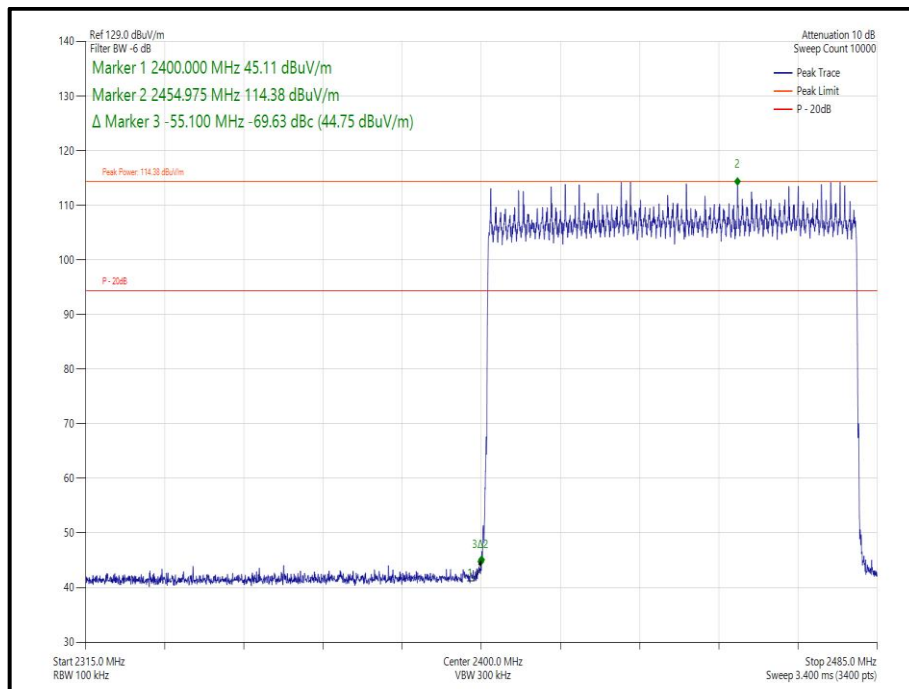


Figure 158 - Hopping - $\pi/4$ DQPSK/2-DH5 - Band Edge Frequency 2400.0 MHz

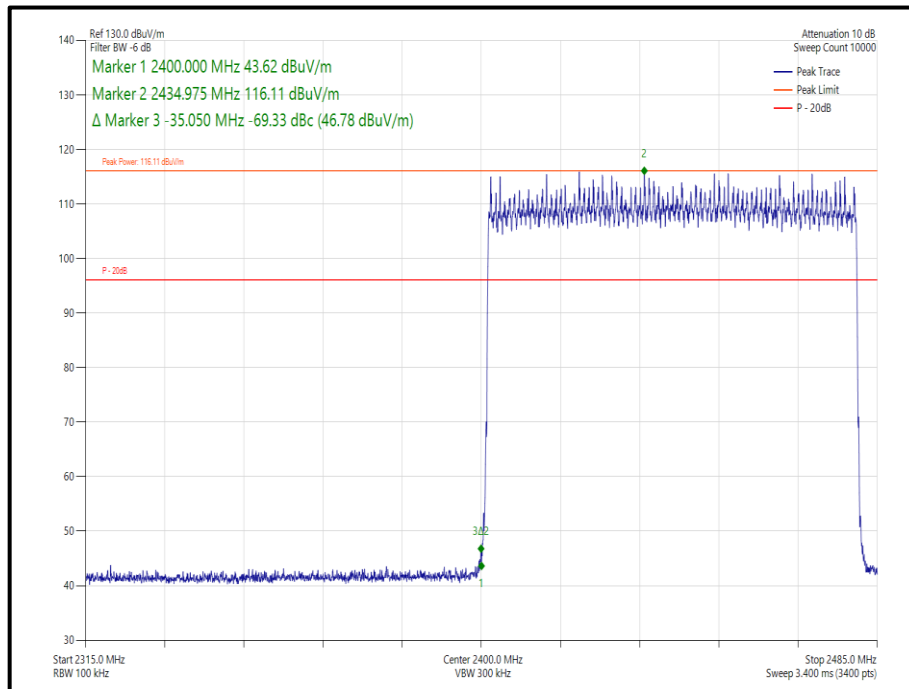


Figure 159 - Hopping - 8-DPSK/3-DH5 - Band Edge Frequency 2400.0 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



2.8.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 16.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Test Receiver	Rohde & Schwarz	ESW44	5914	12	21-Feb-2023
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
3m Semi-Anechoic Chamber	Schaffner	RF Chamber 16	5972	36	24-May-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5974	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5975	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5996	12	06-Jun-2023
Cable (N to N 1m)	Junkosha	MWX221-01000NMSNMS/B	5999	12	05-Jun-2023
Cable (N to N 7m)	Junkosha	MWX221-07000NMSNMS/B	6005	12	05-Jun-2023
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6006	12	05-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6140	12	21-Jun-2023
Digital Multimeter	Fluke	115	6146	12	16-Jun-2023
Humidity & Temperature meter	R.S Components	1364	6148	12	17-Jun-2023
SAC Switch Unit	TUV SUD	SSU002	6190	12	08-Aug-2023

Table 97

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Frequency Hopping Systems - Average Time of Occupancy	-
Frequency Hopping Systems - Channel Separation	± 20.51 kHz
Frequency Hopping Systems - Number of Hopping Channels	-
Frequency Hopping Systems - 20 dB Bandwidth	± 23.51 kHz
Maximum Conducted Output Power	± 1.38 dB
Spurious Radiated Emissions	± 3.2 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB

Table 98

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.