

MEASUREMENT REPORT
FCC PART 15.247 / ISED RSS-247 Bluetooth

Applicant Name:
 Apple Inc.
 One Apple Park Way
 Cupertino, CA 95014
 United States

Date of Testing:
 11/28/2023 - 2/22/2024
Test Report Issue Date:
 3/31/2024
Test Site/Location:
 Element Materials Technology, Morgan Hill, CA, USA
Test Report Serial No.:
 1C2311270067-07.BCG

FCC ID:	BCGA2836
IC:	579C-A2836
APPLICANT:	Apple Inc.

Application Type: Certification
Model/HVIN: A2836
EUT Type: Tablet Device
Max. RF Output Power: 86.896 mW (19.39dBm) Peak Conducted
Frequency Range: 2402 – 2480MHz
Type of Modulation: GFSK, $\pi/4$ -DQPSK, 8DPSK
FCC Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
ISED Specification: RSS-247 Issue 3
Test Procedure(s): ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by: WKR0000010596

Reviewed by: WKR0000005805



RJ Ortanez
 Executive Vice President

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 1 of 118

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Materials Technology Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications.....	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions.....	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA	12
7.0	TEST RESULTS	13
7.1	Summary	13
7.2	Bandwidth Measurement.....	14
7.3	Output Power Measurement	28
7.4	Conducted Authorized Band Edge.....	32
7.5	Carrier Frequency Separation	45
7.6	Time of Occupancy	52
7.7	Number of Hopping Channels	57
7.8	Conducted Spurious Emissions	64
7.9	Radiated Spurious Emissions – Above 1GHz.....	75
7.10	Radiated Spurious Emissions – Below 1GHz	109
7.11	AC Line-Conducted Emissions Measurement	114
8.0	CONCLUSION.....	118

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 2 of 118

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 3 of 118

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2836 and IC: 579C-A2836**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by manufacturer and the following were confirmed:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

Test Device Serial No.: *XN6RRFN7X, YF3QY3X20R, LW67JM4HC9, DLXH160000W000065V, DLXH190000C000065W*

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), 802.11a/ax WIFI 6E, NB UNII (1x, HDR4, HDR8), WPT, 802.15.4

This device supports BT Beamforming.

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 2-1. Bluetooth Frequency/ Channel Operations

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 4 of 118

Measured Duty Cycles						
Bluetooth Mode			Duty Cycle [%]			
			Antenna WF8	Antenna WF7	Antenna WF9	TxBF
2.4GHz	GFSK	ePA	100.0	100.0	100.0	100.0
		iPA	100.0	100.0	100.0	100.0
	8PSK	ePA	100.0	100.0	100.0	100.0
		iPA	100.0	100.0	100.0	100.0
	$\pi/4$ -DQPSK	ePA	100.0	100.0	100.0	100.0
		iPA	100.0	100.0	100.0	100.0

Table 2-2. Measured Duty Cycles

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8
WF8	Config 1	✓	✗	✗	✗	✗	✓
WF8	Config 2	✗	✓	✗	✓	✗	✗
WF8	Config 3	✗	✓	✗	✗	✓	✗
WF8	Config 4	✗	✗	✓	✓	✗	✗
WF8	Config 5	✗	✗	✓	✗	✓	✗
WF7	Config 6	✓	✗	✗	✗	✗	✓
WF7	Config 7	✗	✓	✗	✓	✗	✗
WF7	Config 8	✗	✓	✗	✗	✓	✗
WF7	Config 9	✗	✗	✓	✓	✗	✗
WF7	Config 10	✗	✗	✓	✗	✓	✗

Table 2-3. Simultaneous Transmission Configurations

Note:

Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) - BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2836 IC: 579C-A2836			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 5 of 118	

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Frequency [GHz]	Antenna Gain (dBi)		
	Antenna WF8	Antenna WF7	Antenna WF9
2.4	3.5	3.0	1.5

Table 2-4. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model: A2141	S/N: C02H604EQ05D
	w/AC/DC Adapter	Model: A2166	S/N: C4H042705ZNP0WA6
2	Apple USB-C Cable	Model: Spartan	S/N: GXK1336018XKTR024
3	USB-C Cable	Model: A246C	S/N: DWH80115BK826GV19
	w/ AC Adapter	Model: A2305	S/N: C4H95160004PF4F4V
4	Apple Pencil	Model: A2538	S/N: KJ26TCFXJW
5	DC Power Supply	Model: KPS3010D	S/N: N/A

Table 2-5. Test Support Equipment List

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 6 of 118

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was also used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, 7.6, 7.7, and 7.8 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and the worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

$\pi/4$ -DQPSK has been investigated and confirmed as not the worst case.

All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

Description	Bluetooth	UNII
Antenna	Antenna WF8	Antenna WF8
Channel	79	36
Operation Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11n

Table 2-6. Worst Case Simultaneous Transmission Configuration

2.6 Software and Firmware

The test was conducted with firmware version 21E8197 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added, and no modifications were made during testing.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 7 of 118

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.11. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 8 of 118

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 9 of 118

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 10 of 118

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 11 of 118

V 10.6 09/13/2023

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/10/2023	Annual	3/10/2024	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	6/8/2023	Annual	6/8/2024	192052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

Table 6-1. Test Equipment List

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 12 of 118

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2836
 IC: 579C-A2836
 Method/System: Frequency Hopping Spread Spectrum (FHSS)
 Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)	RSS-247 [5.1(a)]	20dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(1)	RSS-247 [5.4(b)]	Peak Transmitter Output Power	< 1 Watt if ≥ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(b)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(d)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(a)(1)(iii)	RSS-247 [5.1(d)]	Number of Channels	> 15 Channels		PASS	Section 7.7
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	> 20dBc		PASS	Section 7.4 Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.9.6, Section 7.10
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.11

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "BT Auto," Version 4.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.0.0.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 13 of 118

7.2 Bandwidth Measurement

§2.1049; §15.247 (a.1); RSS-247 [5.1(a)]; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.10-2013 – Subclause 6.9.2
RSS-Gen [6.7]

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth and the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 14 of 118

V 10.6 09/13/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 15 of 118

Antenna WF8


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured 99% Occupied Bandwidth [kHz]	Measured 20dB Bandwidth [kHz]
2402	1.0	GFSK	ePA	0	871.27	920.70
2441	1.0	GFSK	ePA	39	871.21	920.60
2480	1.0	GFSK	ePA	78	870.90	920.81
2402	3.0	8DPSK	ePA	0	1209.18	1347.17
2441	3.0	8DPSK	ePA	39	1208.69	1346.35
2480	3.0	8DPSK	ePA	78	1208.30	1345.72

Table 7-2. 20dB BW and 99% OBW Measurements Antenna WF8

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 16 of 118

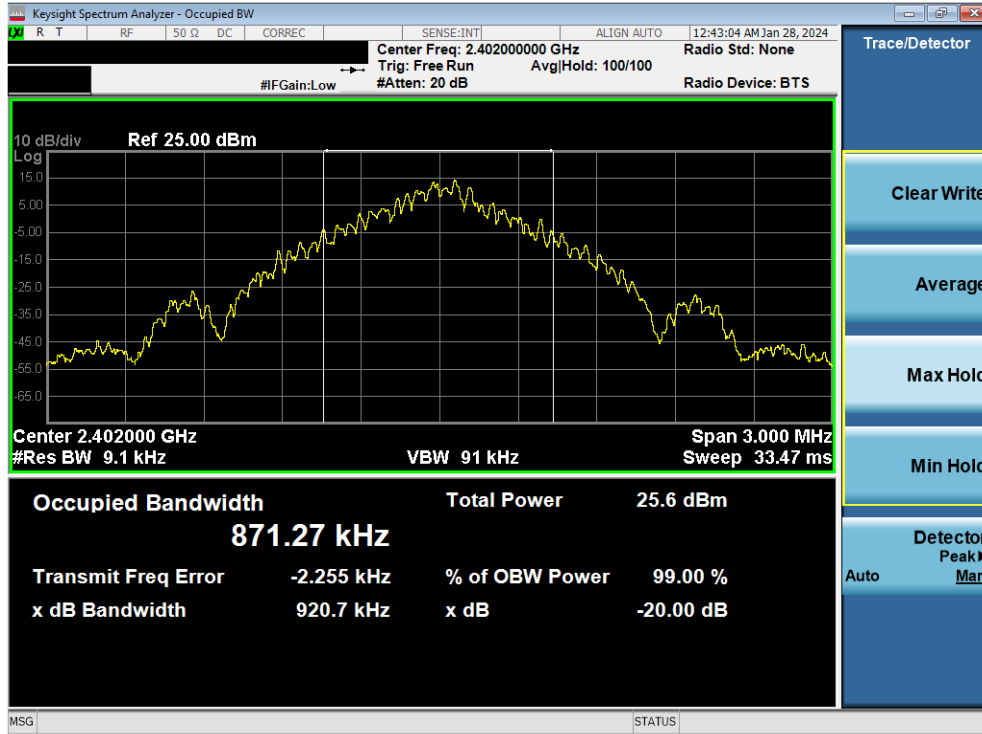


Plot 7-1. 20dB BW and 99% OBW Plot Antenna WF8 (Bluetooth, GFSK, ePA – Ch. 0)

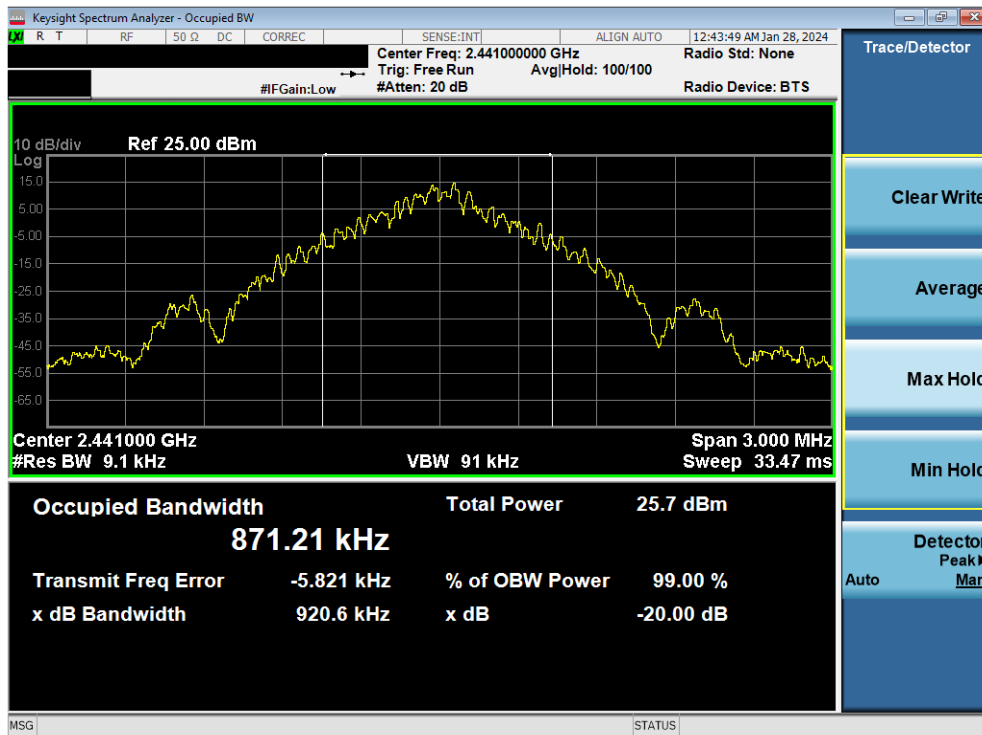


Plot 7-2. 20dB BW and 99% OBW Plot Antenna WF8 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 17 of 118

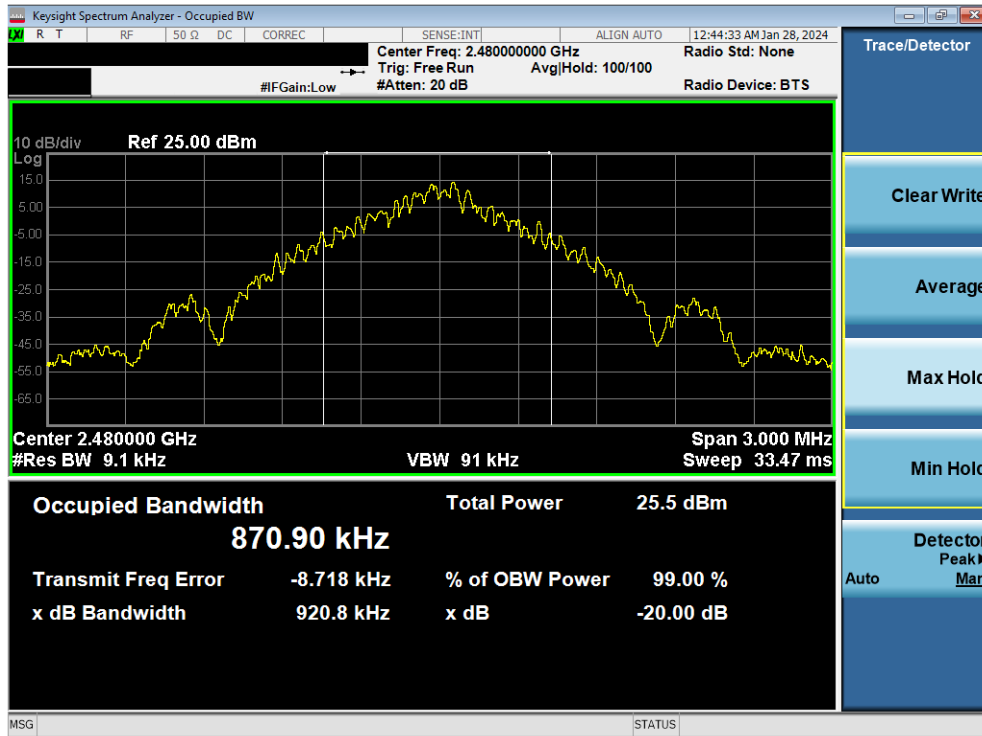


Plot 7-3. 20dB BW and 99% OBW Plot Antenna WF8 (Bluetooth, GFSK, ePA – Ch. 78)

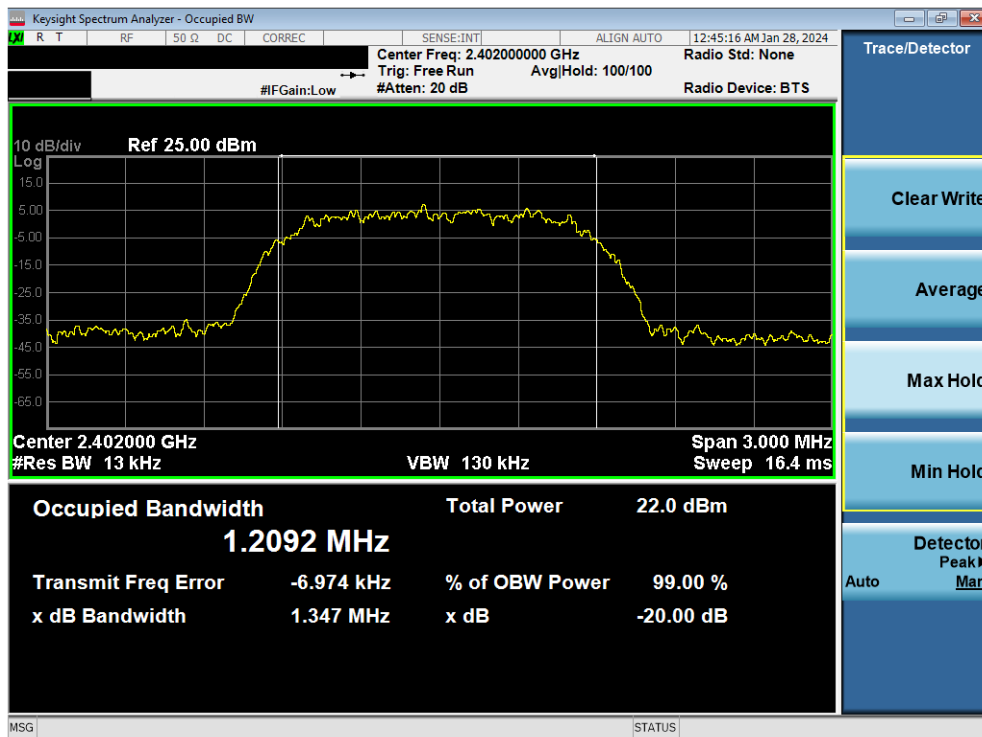


Plot 7-4. 20dB BW and 99% OBW Plot Antenna WF8 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 18 of 118

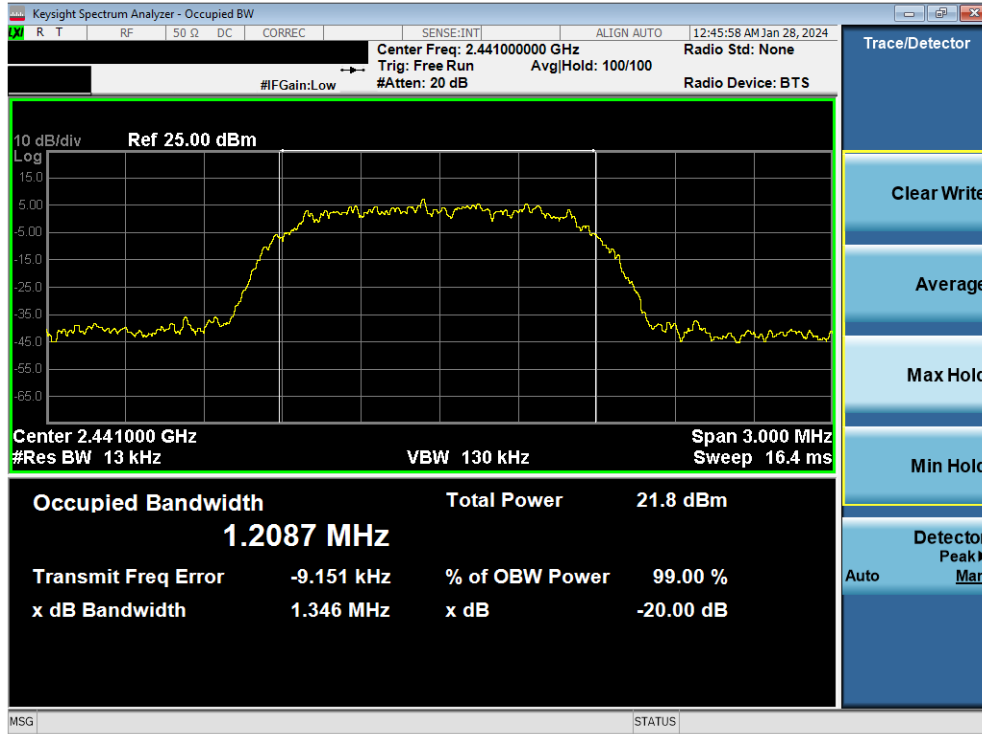

Plot 7-5. 20dB BW and 99% OBW Plot Antenna WF8 (Bluetooth, 8DPSK, ePA – Ch. 39)

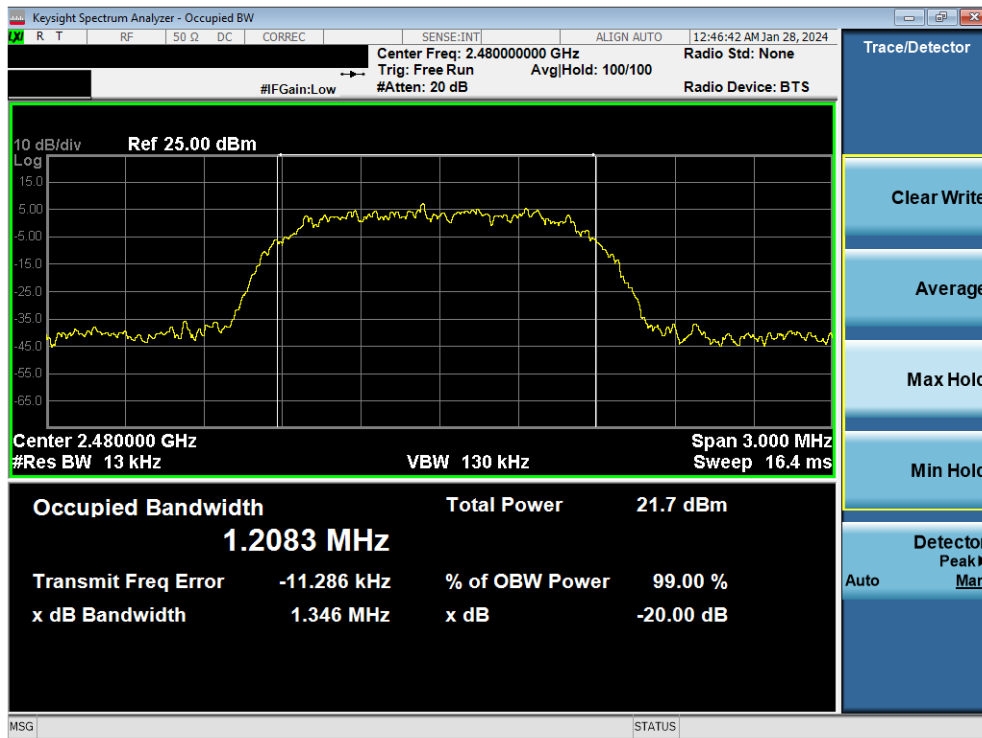

Plot 7-6. 20dB BW and 99% OBW Plot Antenna WF8 (Bluetooth, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 19 of 118

Antenna WF7


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured 99% Occupied Bandwidth [kHz]	Measured 20dB Bandwidth [kHz]
2402	1.0	GFSK	ePA	0	871.81	920.71
2441	1.0	GFSK	ePA	39	871.89	920.38
2480	1.0	GFSK	ePA	78	871.85	920.52
2402	3.0	8DPSK	ePA	0	1207.49	1345.87
2441	3.0	8DPSK	ePA	39	1207.20	1346.18
2480	3.0	8DPSK	ePA	78	1206.92	1346.01

Table 7-3. 20dB BW and 99% OBW Bandwidth Measurements Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 20 of 118

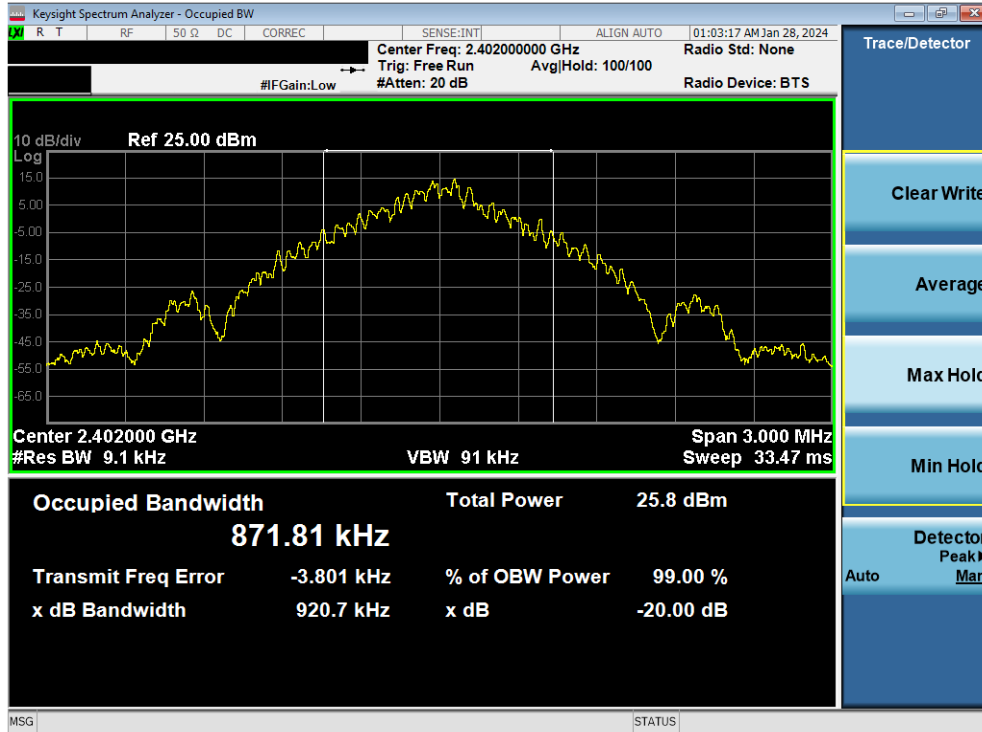


Plot 7-7. 20dB BW and 99% OBW Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 0)

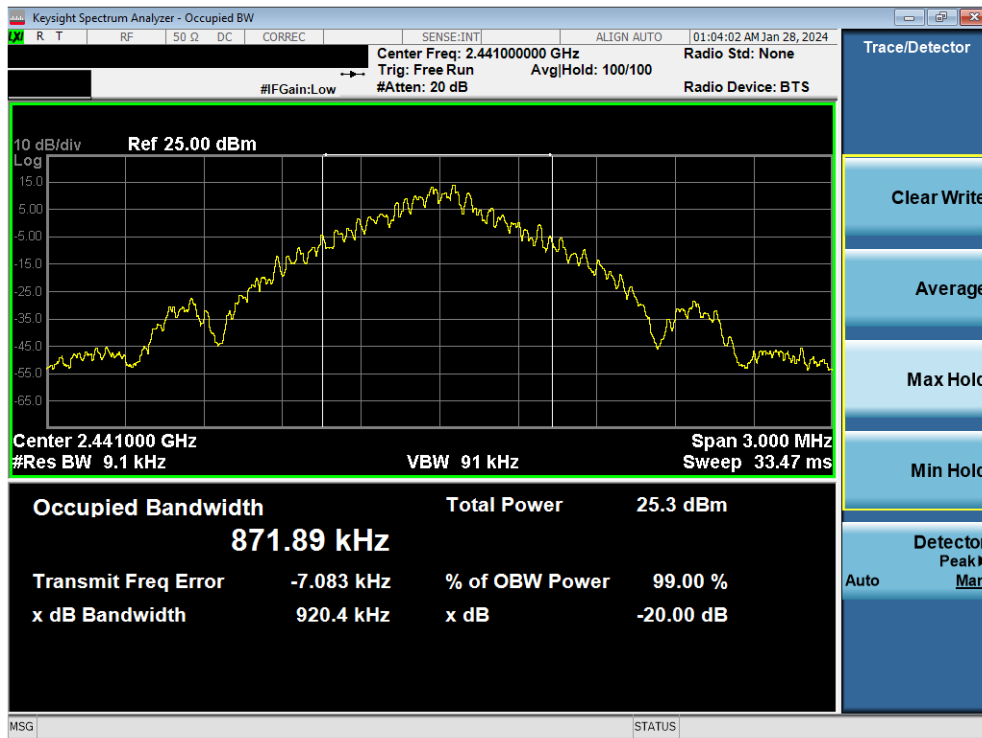


Plot 7-8. 20dB BW and 99% OBW Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 21 of 118

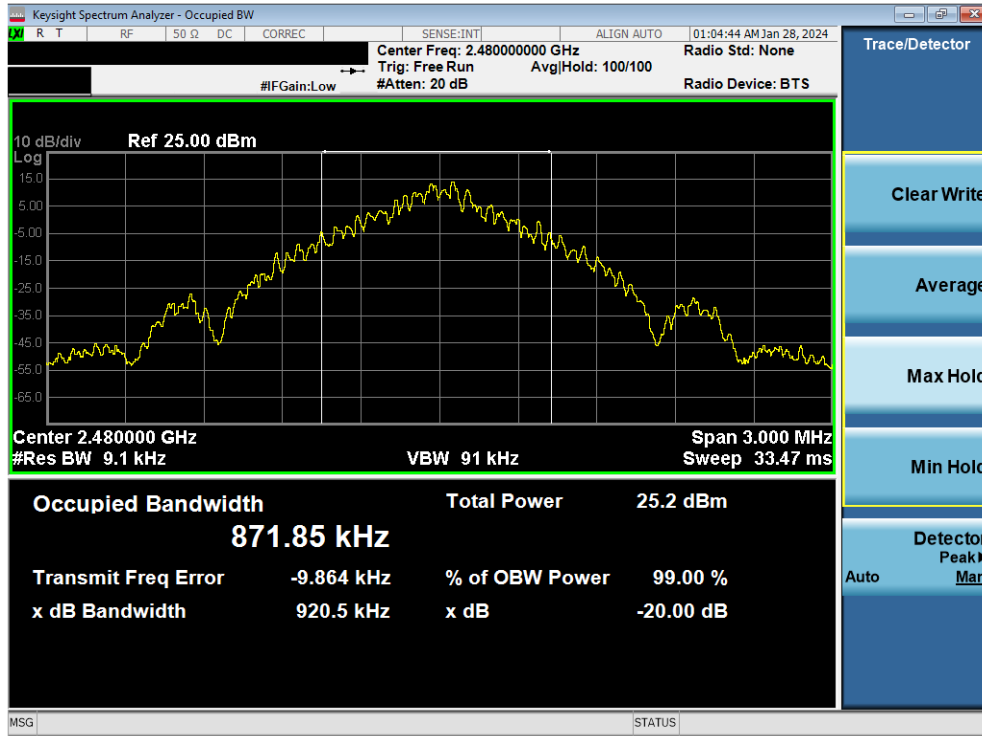


Plot 7-9. 20dB BW and 99% OBW Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 78)

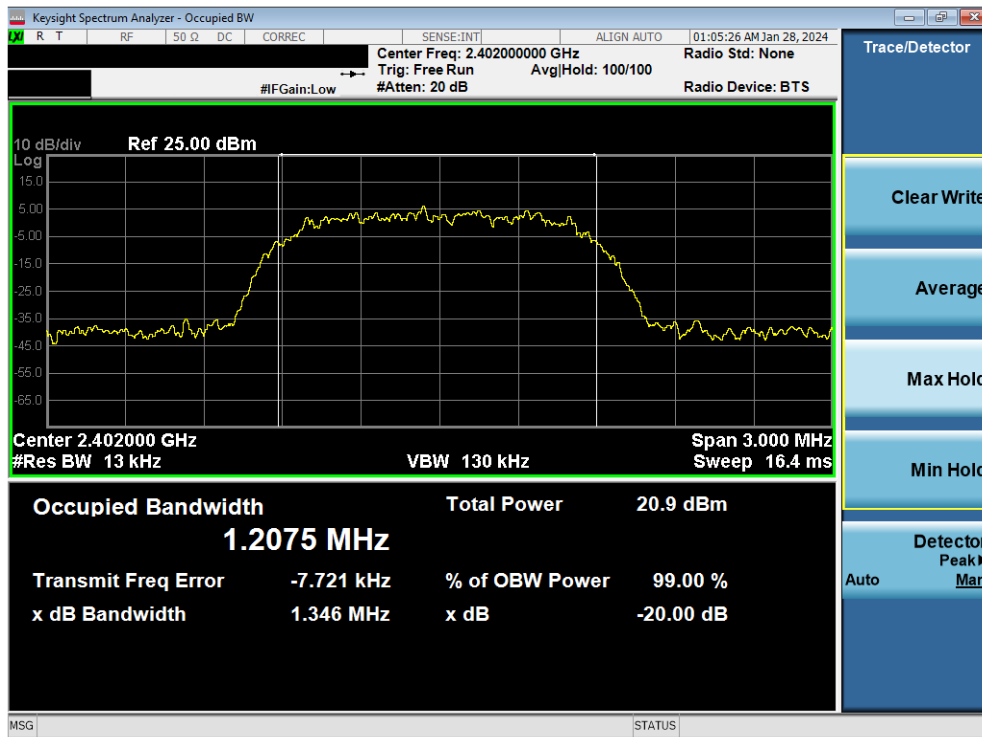


Plot 7-10. 20dB BW and 99% OBW Plot Antenna WF7 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 22 of 118

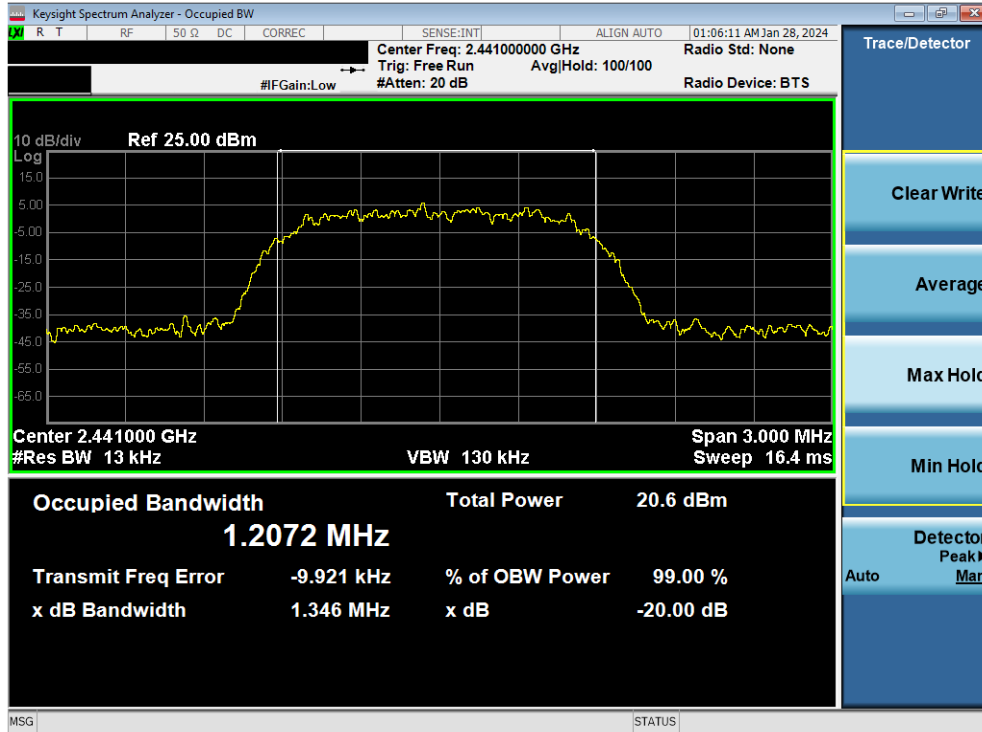

Plot 7-11. 20dB BW and 99% OBW Plot Antenna WF7 (Bluetooth, 8DPSK, ePA – Ch. 39)

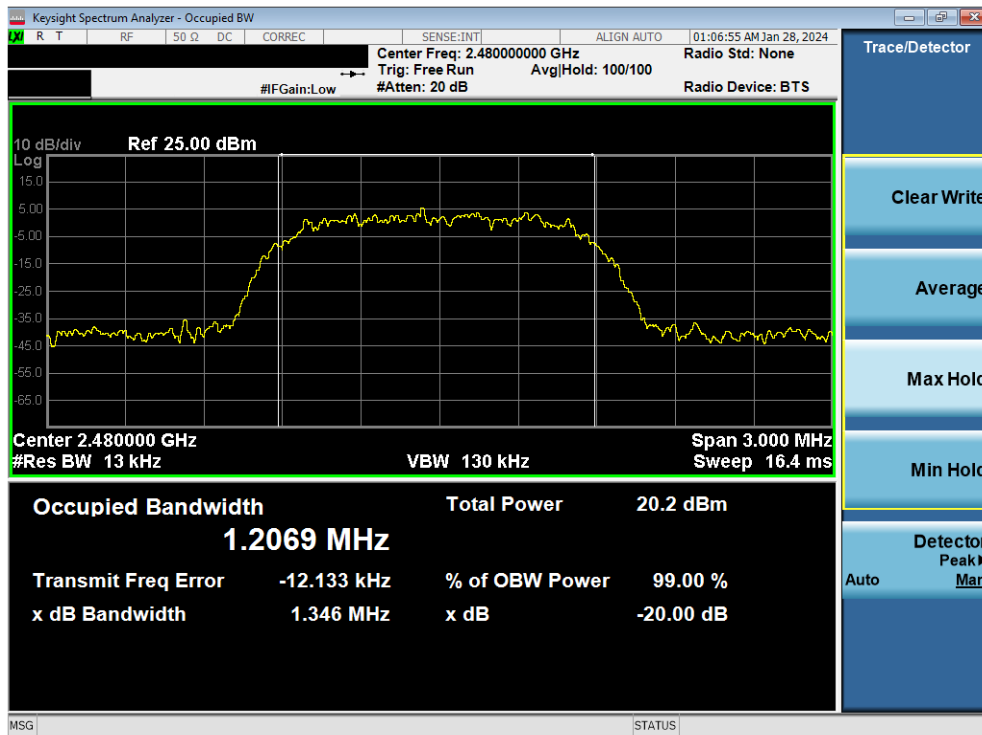

Plot 7-12. 20dB BW and 99% OBW Plot Antenna WF7 (Bluetooth, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 23 of 118

Antenna WF9


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured 99% Occupied Bandwidth [kHz]	Measured 20dB Bandwidth [kHz]
2402	1.0	GFSK	ePA	0	871.15	920.88
2441	1.0	GFSK	ePA	39	871.33	920.74
2480	1.0	GFSK	ePA	78	871.73	920.38
2402	3.0	8DPSK	ePA	0	1207.80	1346.08
2441	3.0	8DPSK	ePA	39	1207.31	1345.52
2480	3.0	8DPSK	ePA	78	1207.29	1345.62

Table 7-4. 20dB BW and 99% OBW Bandwidth Measurements Antenna WF9

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 24 of 118

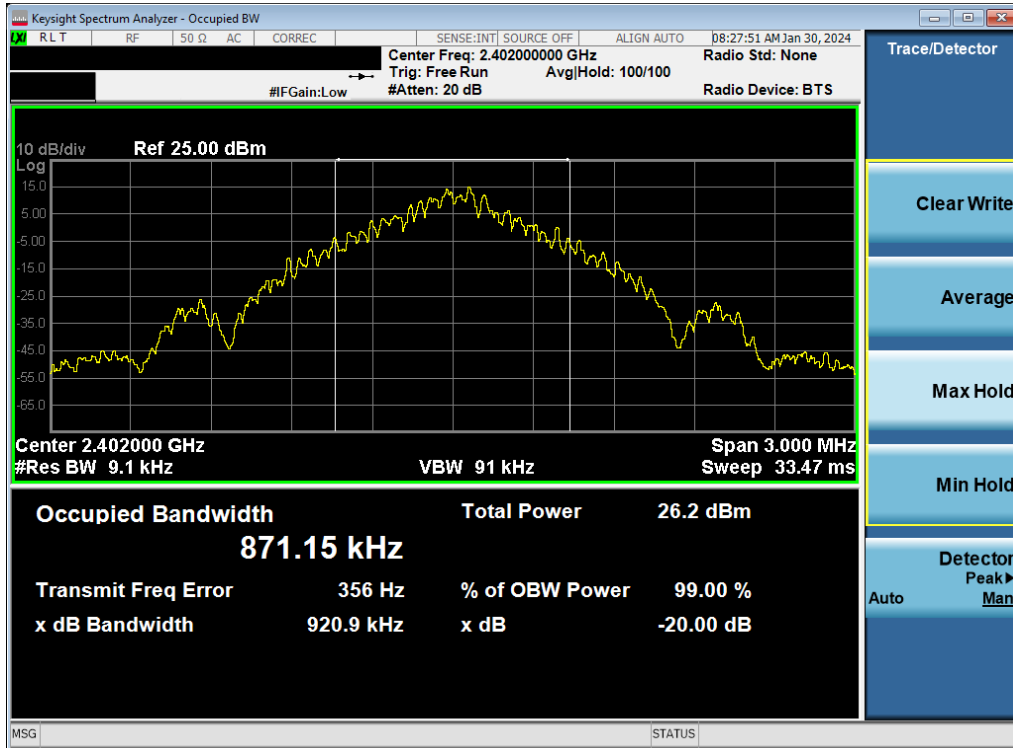


Plot 7-13. 20dB BW and 99% OBW Plot Antenna WF9 (Bluetooth, GFSK, ePA – Ch. 0)

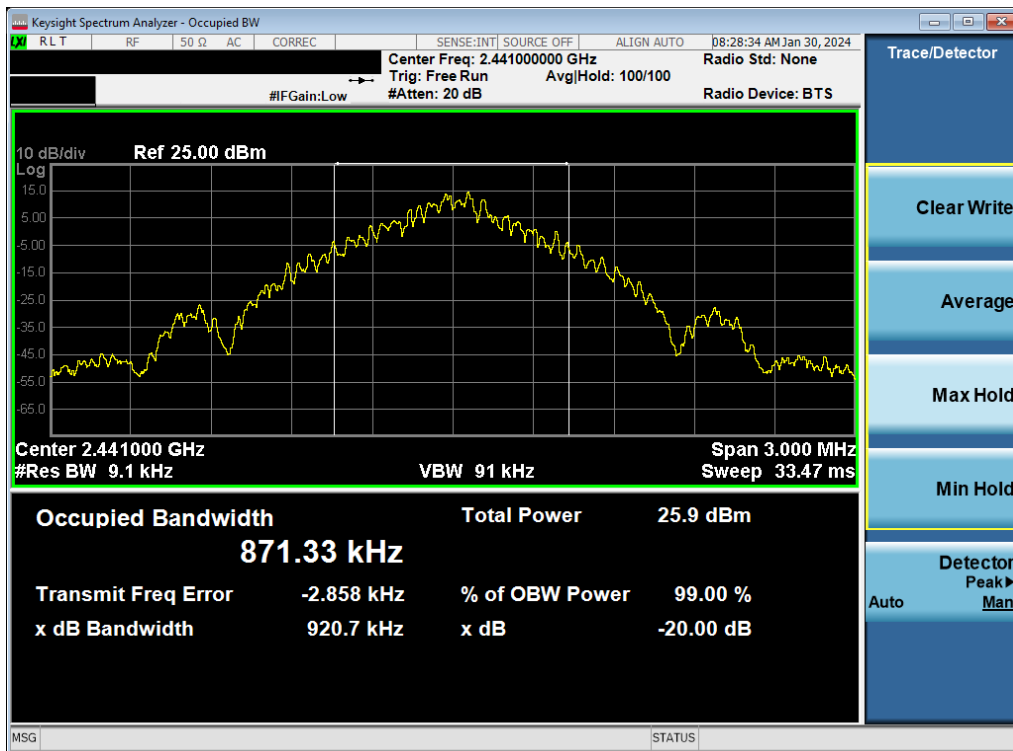


Plot 7-14. 20dB BW and 99% OBW Plot Antenna WF9 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 25 of 118

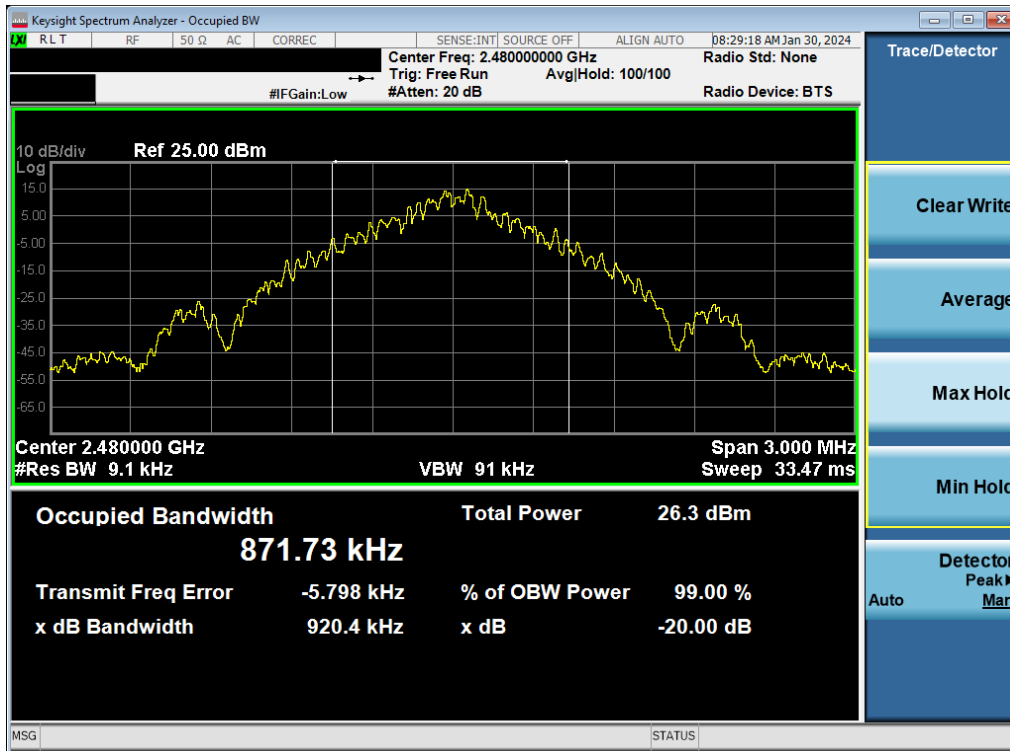


Plot 7-15. 20dB BW and 99% OBW Plot Antenna WF9 (Bluetooth, GFSK, ePA – Ch. 78)

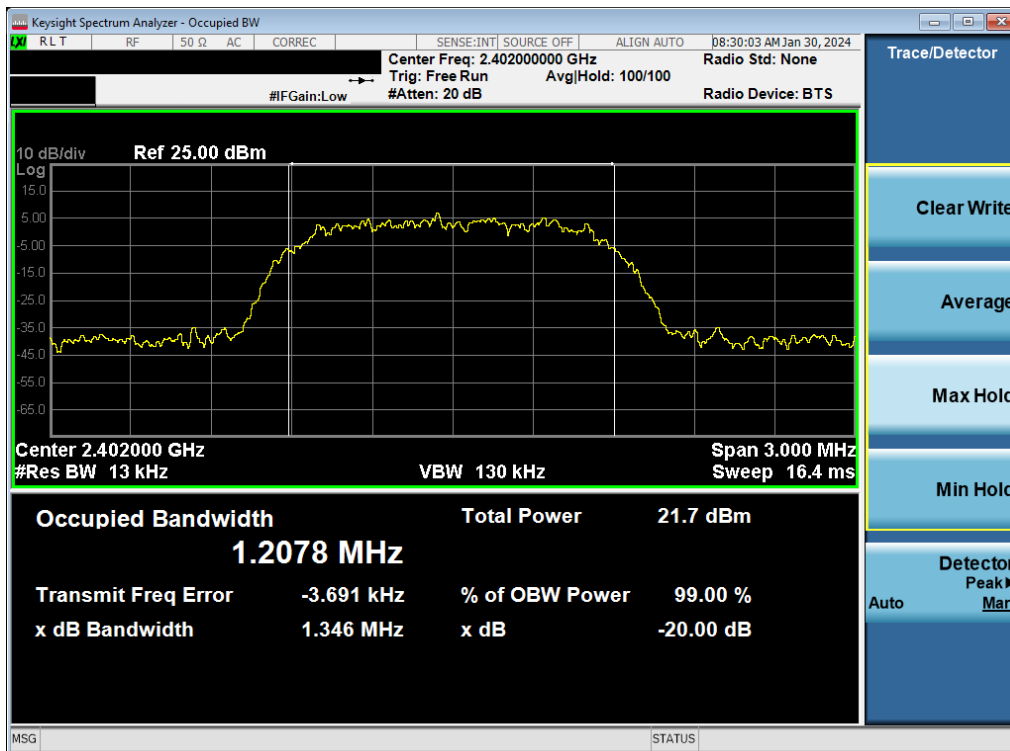


Plot 7-16. 20dB BW and 99% OBW Plot Antenna WF9 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 26 of 118

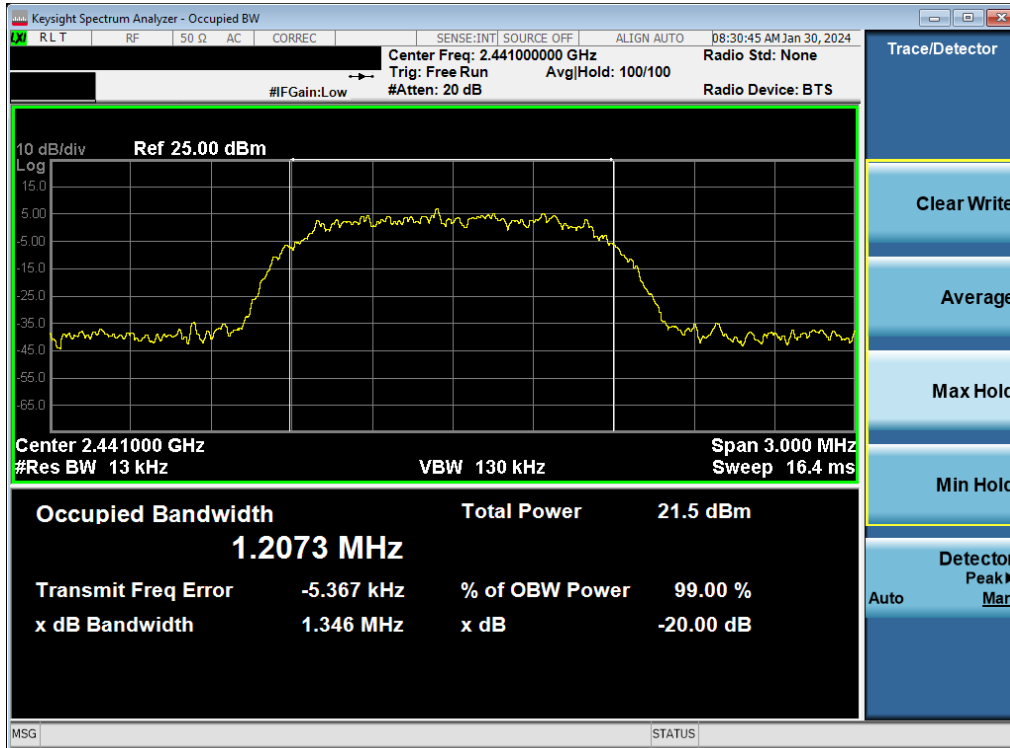

Plot 7-17. 20dB BW and 99% OBW Plot Antenna WF9 (Bluetooth, 8DPSK, ePA – Ch. 39)

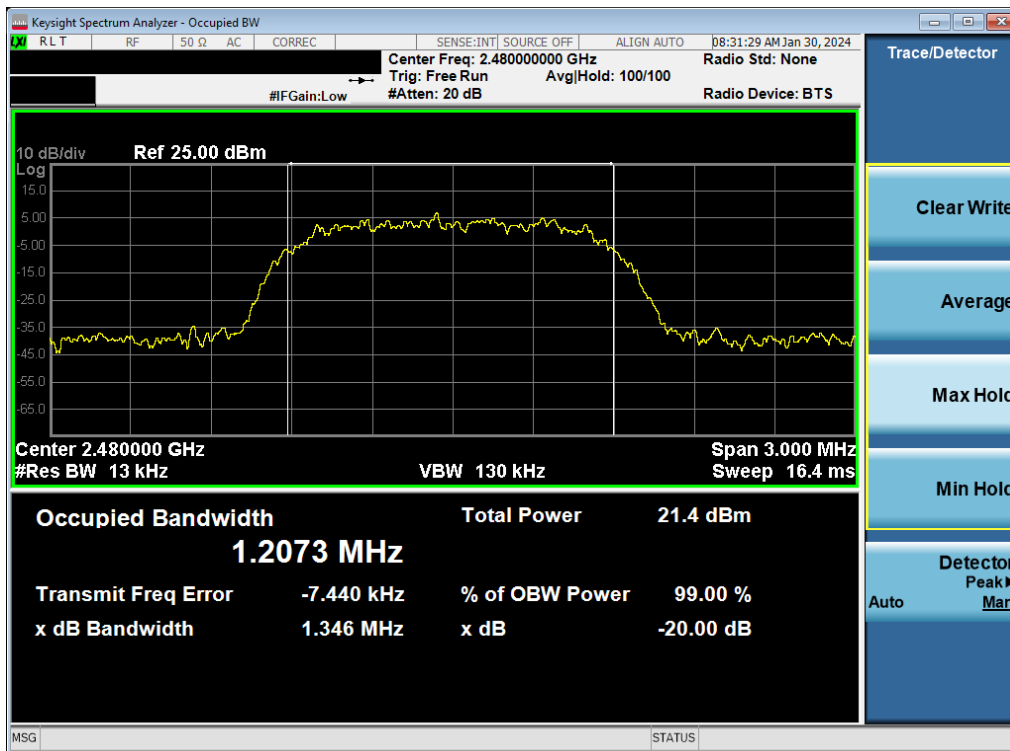

Plot 7-18. 20dB BW and 99% OBW Plot Antenna WF9 (Bluetooth, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 27 of 118

7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(b)]

Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. Peak and Average power measurements are performed using a broadband power meter with a pulse sensor.

The maximum peak conducted output power of frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels is 1 watt

The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For FHSS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels. The e.i.r.p. shall not exceed 4 W.

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5
 ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement

Note

All supported modulations have been tested and $\pi/4$ -DQPSK was found not as the worst case modulation so only GFSK and 8DPSK is reported.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 28 of 118

V 10.6 09/13/2023

7.3.1 Peak Output Power Measurement

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	14.04	25.340	30.00	-15.96	3.50	17.54	36.02	-18.48
2441	1.0	GFSK	ePA	39	14.26	26.650	30.00	-15.74	3.50	17.76	36.02	-18.26
2480	1.0	GFSK	ePA	78	14.36	27.265	30.00	-15.64	3.50	17.86	36.02	-18.16
2402	1.0	GFSK	iPA	0	11.71	14.839	30.00	-18.29	3.50	15.21	36.02	-20.81
2441	1.0	GFSK	iPA	39	11.58	14.371	30.00	-18.43	3.50	15.08	36.02	-20.95
2480	1.0	GFSK	iPA	78	11.59	14.411	30.00	-18.41	3.50	15.09	36.02	-20.93
2402	3.0	8DPSK	ePA	0	17.43	55.360	30.00	-12.57	3.50	20.93	36.02	-15.09
2441	3.0	8DPSK	ePA	39	17.30	53.641	30.00	-12.71	3.50	20.80	36.02	-15.23
2480	3.0	8DPSK	ePA	78	17.03	50.489	30.00	-12.97	3.50	20.53	36.02	-15.49
2402	3.0	8DPSK	iPA	0	10.42	11.005	30.00	-19.58	3.50	13.92	36.02	-22.10
2441	3.0	8DPSK	iPA	39	10.23	10.546	30.00	-19.77	3.50	13.73	36.02	-22.29
2480	3.0	8DPSK	iPA	78	10.19	10.457	30.00	-19.81	3.50	13.69	36.02	-22.33

Table 7-5. Peak Conducted Output Power Measurements Antenna WF8

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	12.74	18.780	30.00	-17.26	3.00	15.74	36.02	-20.28
2441	1.0	GFSK	ePA	39	12.81	19.085	30.00	-17.19	3.00	15.81	36.02	-20.21
2480	1.0	GFSK	ePA	78	12.52	17.873	30.00	-17.48	3.00	15.52	36.02	-20.50
2402	1.0	GFSK	iPA	0	11.61	14.474	30.00	-18.39	3.00	14.61	36.02	-21.41
2441	1.0	GFSK	iPA	39	11.94	15.617	30.00	-18.06	3.00	14.94	36.02	-21.08
2480	1.0	GFSK	iPA	78	11.56	14.332	30.00	-18.44	3.00	14.56	36.02	-21.46
2402	3.0	8DPSK	ePA	0	15.59	36.208	30.00	-14.41	3.00	18.59	36.02	-17.43
2441	3.0	8DPSK	ePA	39	15.82	38.177	30.00	-14.18	3.00	18.82	36.02	-17.20
2480	3.0	8DPSK	ePA	78	15.77	37.775	30.00	-14.23	3.00	18.77	36.02	-17.25
2402	3.0	8DPSK	iPA	0	10.22	10.529	30.00	-19.78	3.00	13.22	36.02	-22.80
2441	3.0	8DPSK	iPA	39	10.20	10.469	30.00	-19.80	3.00	13.20	36.02	-22.82
2480	3.0	8DPSK	iPA	78	10.12	10.287	30.00	-19.88	3.00	13.12	36.02	-22.90

Table 7-6. Peak Conducted Output Power Measurements Antenna WF7

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	18.49	70.583	30.00	-11.51	1.50	19.99	36.02	-16.03
2441	1.0	GFSK	ePA	39	18.70	74.046	30.00	-11.31	1.50	20.20	36.02	-15.83
2480	1.0	GFSK	ePA	78	18.64	73.181	30.00	-11.36	1.50	20.14	36.02	-15.88
2402	1.0	GFSK	iPA	0	11.61	14.494	30.00	-18.39	1.50	13.11	36.02	-22.91
2441	1.0	GFSK	iPA	39	11.83	15.237	30.00	-18.17	1.50	13.33	36.02	-22.69
2480	1.0	GFSK	iPA	78	11.55	14.272	30.00	-18.46	1.50	13.05	36.02	-22.98
2402	3.0	8DPSK	ePA	0	17.66	58.277	30.00	-12.35	1.50	19.16	36.02	-16.87
2441	3.0	8DPSK	ePA	39	17.74	59.361	30.00	-12.27	1.50	19.24	36.02	-16.79
2480	3.0	8DPSK	ePA	78	17.72	59.156	30.00	-12.28	1.50	19.22	36.02	-16.80
2402	3.0	8DPSK	iPA	0	10.49	11.181	30.00	-19.52	1.50	11.99	36.02	-24.04
2441	3.0	8DPSK	iPA	39	10.15	10.342	30.00	-19.85	1.50	11.65	36.02	-24.37
2480	3.0	8DPSK	iPA	78	10.55	11.350	30.00	-19.45	1.50	12.05	36.02	-23.97

Table 7-7. Peak Conducted Output Power Measurements Antenna WF9

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
					Antenna WF8		Antenna WF7		Summed							
					[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	14.15	26.020	12.83	19.165	16.55	45.186	29.74	-13.19	6.26	22.81	36.02	-13.21
2441	1.0	GFSK	ePA	39	14.44	27.797	12.64	18.382	16.64	46.132	29.74	-13.10	6.26	22.90	36.02	-13.12
2480	1.0	GFSK	ePA	78	14.24	26.546	12.54	17.927	16.48	44.463	29.74	-13.26	6.26	22.74	36.02	-13.28
2402	1.0	GFSK	iPA	0	11.77	15.018	11.87	15.389	14.83	30.409	29.74	-14.91	6.26	21.09	36.02	-14.93
2441	1.0	GFSK	iPA	39	11.63	14.565	11.68	14.716	14.67	29.309	29.74	-15.07	6.26	20.93	36.02	-15.09
2480	1.0	GFSK	iPA	78	11.85	15.311	11.62	14.534	14.75	29.854	29.74	-14.99	6.26	21.01	36.02	-15.01
2402	3.0	8DPSK	ePA	0	18.84	48.339	15.85	38.495	19.39	86.896	29.74	-10.35	6.26	25.65	36.02	-10.37
2441	3.0	8DPSK	ePA	39	18.42	43.873	15.75	37.592	19.11	81.470	29.74	-10.63	6.26	25.37	36.02	-10.65
2480	3.0	8DPSK	ePA	78	18.46	44.300	15.68	38.566	19.10	81.283	29.74	-10.64	6.26	25.36	36.02	-10.66
2402	3.0	8DPSK	iPA	0	10.26	10.605	10.20	10.469	13.24	21.086	29.74	-16.50	6.26	19.50	36.02	-16.52
2441	3.0	8DPSK	iPA	39	10.23	10.549	10.02	10.055	13.14	20.606	29.74	-16.60	6.26	19.40	36.02	-16.62
2480	3.0	8DPSK	iPA	78	10.21	10.495	10.24	10.563	13.23	21.038	29.74	-16.51	6.26	19.49	36.02	-16.53

Table 7-8. Peak Conducted Output Power Measurements TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 29 of 118

7.3.2 Average Output Power Measurement

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Avg Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	13.75	23.686	30.00	-16.26	3.50	17.25	36.02	-18.78
2441	1.0	GFSK	ePA	39	13.96	24.860	30.00	-16.05	3.50	17.46	36.02	-18.57
2480	1.0	GFSK	ePA	78	14.00	25.119	30.00	-16.00	3.50	17.50	36.02	-18.52
2402	1.0	GFSK	iPA	0	11.49	14.090	30.00	-18.51	3.50	14.99	36.02	-21.03
2441	1.0	GFSK	iPA	39	11.34	13.627	30.00	-18.66	3.50	14.84	36.02	-21.18
2480	1.0	GFSK	iPA	78	11.36	13.690	30.00	-18.64	3.50	14.86	36.02	-21.16
2402	3.0	8DPSK	ePA	0	14.00	25.119	30.00	-16.00	3.50	17.50	36.02	-18.52
2441	3.0	8DPSK	ePA	39	13.96	24.900	30.00	-16.04	3.50	17.46	36.02	-18.56
2480	3.0	8DPSK	ePA	78	13.69	23.388	30.00	-16.31	3.50	17.19	36.02	-18.83
2402	3.0	8DPSK	iPA	0	7.49	5.610	30.00	-22.51	3.50	10.99	36.02	-25.03
2441	3.0	8DPSK	iPA	39	7.36	5.444	30.00	-22.64	3.50	10.86	36.02	-25.16
2480	3.0	8DPSK	iPA	78	7.34	5.423	30.00	-22.66	3.50	10.84	36.02	-25.18

Table 7-9. Average Conducted Output Power Measurements Antenna WF8

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Avg Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	12.50	17.783	30.00	-17.50	3.00	15.50	36.02	-20.52
2441	1.0	GFSK	ePA	39	12.48	17.701	30.00	-17.52	3.00	15.48	36.02	-20.54
2480	1.0	GFSK	ePA	78	12.34	17.155	30.00	-17.66	3.00	15.34	36.02	-20.68
2402	1.0	GFSK	iPA	0	11.31	13.521	30.00	-18.69	3.00	14.31	36.02	-21.71
2441	1.0	GFSK	iPA	39	11.48	14.060	30.00	-18.52	3.00	14.48	36.02	-21.54
2480	1.0	GFSK	iPA	78	11.27	13.394	30.00	-18.73	3.00	14.27	36.02	-21.75
2402	3.0	8DPSK	ePA	0	12.31	17.002	30.00	-17.70	3.00	15.31	36.02	-20.72
2441	3.0	8DPSK	ePA	39	12.47	17.660	30.00	-17.53	3.00	15.47	36.02	-20.55
2480	3.0	8DPSK	ePA	78	12.49	17.754	30.00	-17.51	3.00	15.49	36.02	-20.53
2402	3.0	8DPSK	iPA	0	7.33	5.413	30.00	-22.67	3.00	10.33	36.02	-25.69
2441	3.0	8DPSK	iPA	39	7.28	5.351	30.00	-22.72	3.00	10.28	36.02	-25.74
2480	3.0	8DPSK	iPA	78	7.21	5.259	30.00	-22.79	3.00	10.21	36.02	-25.81

Table 7-10. Average Conducted Output Power Measurements Antenna WF7

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Avg Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	18.30	67.655	30.00	-11.70	1.50	19.80	36.02	-16.22
2441	1.0	GFSK	ePA	39	18.50	70.795	30.00	-11.50	1.50	20.00	36.02	-16.02
2480	1.0	GFSK	ePA	78	18.46	70.113	30.00	-11.54	1.50	19.96	36.02	-16.06
2402	1.0	GFSK	iPA	0	11.41	13.845	30.00	-18.59	1.50	12.91	36.02	-23.11
2441	1.0	GFSK	iPA	39	11.48	14.060	30.00	-18.52	1.50	12.98	36.02	-23.04
2480	1.0	GFSK	iPA	78	11.36	13.684	30.00	-18.64	1.50	12.86	36.02	-23.16
2402	3.0	8DPSK	ePA	0	14.35	27.252	30.00	-15.65	1.50	15.85	36.02	-20.17
2441	3.0	8DPSK	ePA	39	14.42	27.663	30.00	-15.58	1.50	15.92	36.02	-20.10
2480	3.0	8DPSK	ePA	78	14.39	27.492	30.00	-15.61	1.50	15.89	36.02	-20.13
2402	3.0	8DPSK	iPA	0	7.49	5.610	30.00	-22.51	1.50	8.99	36.02	-27.03
2441	3.0	8DPSK	iPA	39	7.25	5.305	30.00	-22.75	1.50	8.75	36.02	-27.27
2480	3.0	8DPSK	iPA	78	7.42	5.521	30.00	-22.58	1.50	8.92	36.02	-27.10

Table 7-11. Average Conducted Output Power Measurements Antenna WF9

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Average Conducted Power						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
					Antenna WF8		Antenna WF7		Summed							
					[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	13.86	24.344	12.49	17.742	16.24	42.073	29.74	-13.50	6.26	22.50	36.02	-13.52
2441	1.0	GFSK	ePA	39	14.00	25.119	12.46	17.632	16.31	42.756	29.74	-13.43	6.26	22.57	36.02	-13.45
2480	1.0	GFSK	ePA	78	13.93	24.740	12.35	17.195	16.23	41.976	29.74	-13.51	6.26	22.49	36.02	-13.53
2402	1.0	GFSK	iPA	0	11.49	14.093	11.47	14.028	14.49	28.119	29.74	-15.25	6.26	20.75	36.02	-15.27
2441	1.0	GFSK	iPA	39	11.40	13.804	11.38	13.740	14.40	27.542	29.74	-15.34	6.26	20.66	36.02	-15.36
2480	1.0	GFSK	iPA	78	11.47	14.028	11.33	13.586	14.41	27.606	29.74	-15.33	6.26	20.67	36.02	-15.35
2402	3.0	8DPSK	ePA	0	13.48	22.284	12.48	17.701	16.02	39.994	29.74	-13.72	6.26	22.28	36.02	-13.74
2441	3.0	8DPSK	ePA	39	13.18	20.811	12.50	17.783	15.87	38.637	29.74	-13.67	6.26	22.13	36.02	-13.89
2480	3.0	8DPSK	ePA	78	13.22	20.985	12.42	17.450	15.85	38.459	29.74	-13.89	6.26	22.11	36.02	-13.91
2402	3.0	8DPSK	iPA	0	7.36	5.444	7.32	5.394	10.35	10.839	29.74	-19.39	6.26	16.61	36.02	-19.41
2441	3.0	8DPSK	iPA	39	7.36	5.450	7.10	5.131	10.25	10.593	29.74	-19.49	6.26	16.51	36.02	-19.51
2480	3.0	8DPSK	iPA	78	7.36	5.443	7.36	5.441	10.37	10.889	29.74	-19.37	6.26	16.63	36.02	-19.39

Table 7-12. Average Conducted Output Power Measurements TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 30 of 118

Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna WF8 and Antenna WF7 were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample TxBF Calculation:

At 2402MHz, the average conducted output power was measured to be 13.86 dBm for Antenna WF8 and 12.49 dBm for Antenna WF7.

$$\text{Antenna WF8} + \text{Antenna WF7} = \text{TxBF}$$

$$(13.86 \text{ dBm} + 12.49 \text{ dBm}) = (24.344 \text{ mW} + 17.742 \text{ mW}) = 42.073 \text{ mW} = 16.24 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 2402MHz, the average conducted output power was calculated to be 13.75 dBm with antenna gain of 3.50 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$16.24 \text{ dBm} + 6.26 \text{ dBi} = 22.50 \text{ dBm}$$

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 31 of 118

7.4 Conducted Authorized Band Edge

§15.247 (d); RSS-247 [5.5]

Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. **The maximum permissible out-of-band emission level is 20 dBc.**

Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup


Test Notes

1. Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 32 of 118

V 10.6 09/13/2023

Antenna WF8

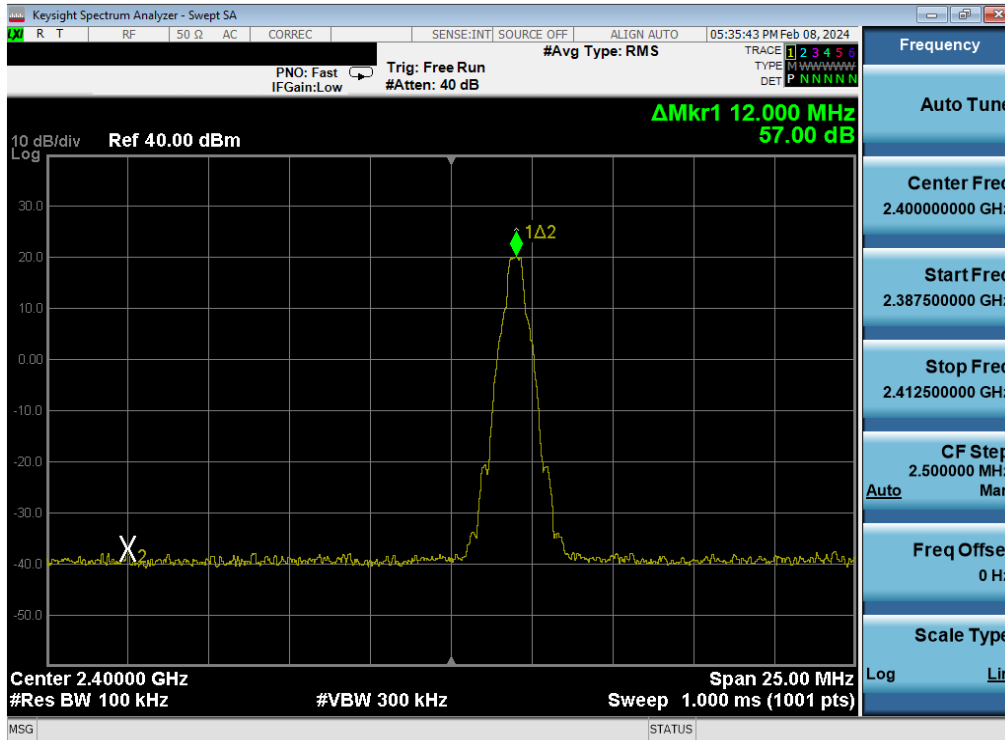


Plot 7-19. Band Edge Plot Antenna WF8 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

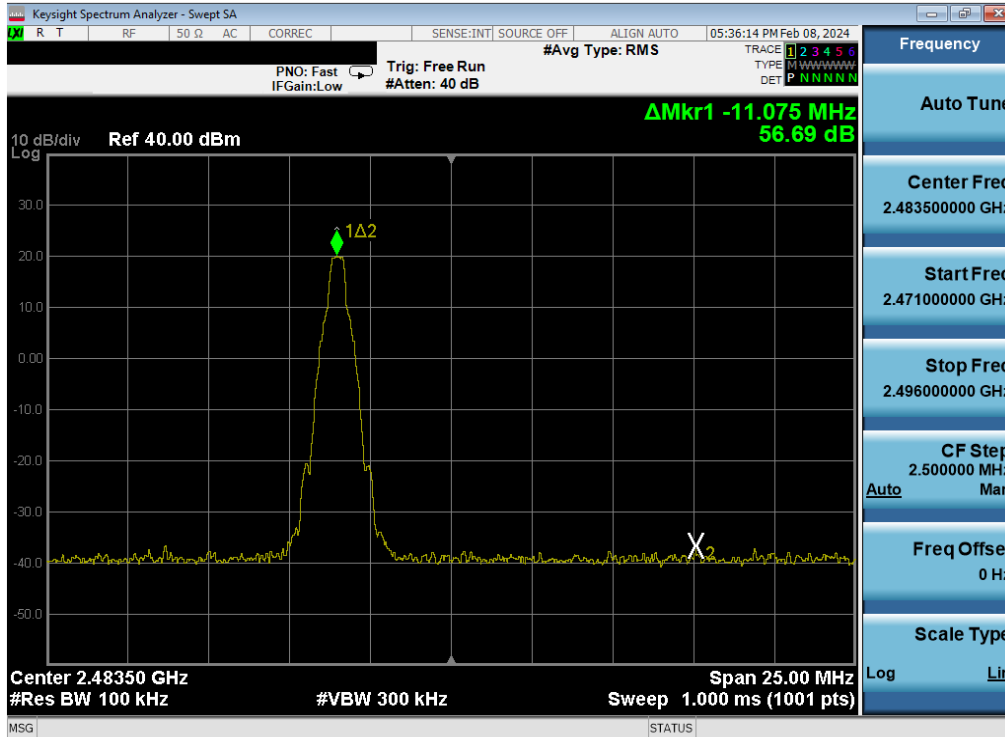


Plot 7-20. Band Edge Plot Antenna WF8 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 33 of 118

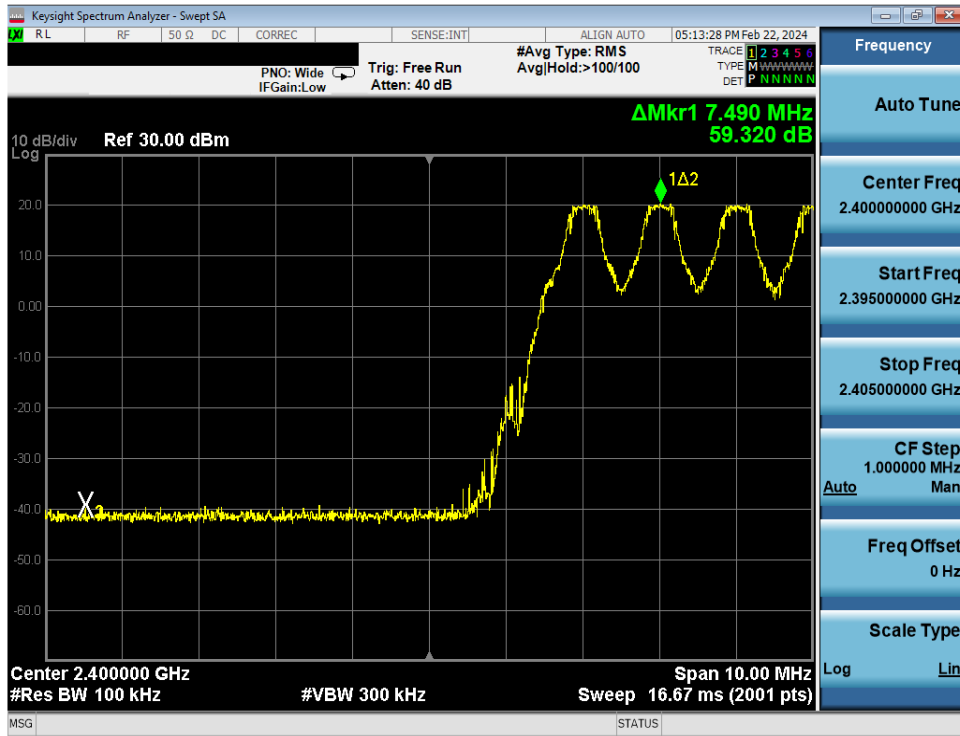


Plot 7-21. Band Edge Plot Antenna WF8 (Bluetooth with Hopping Enabled, GFSK, ePA)

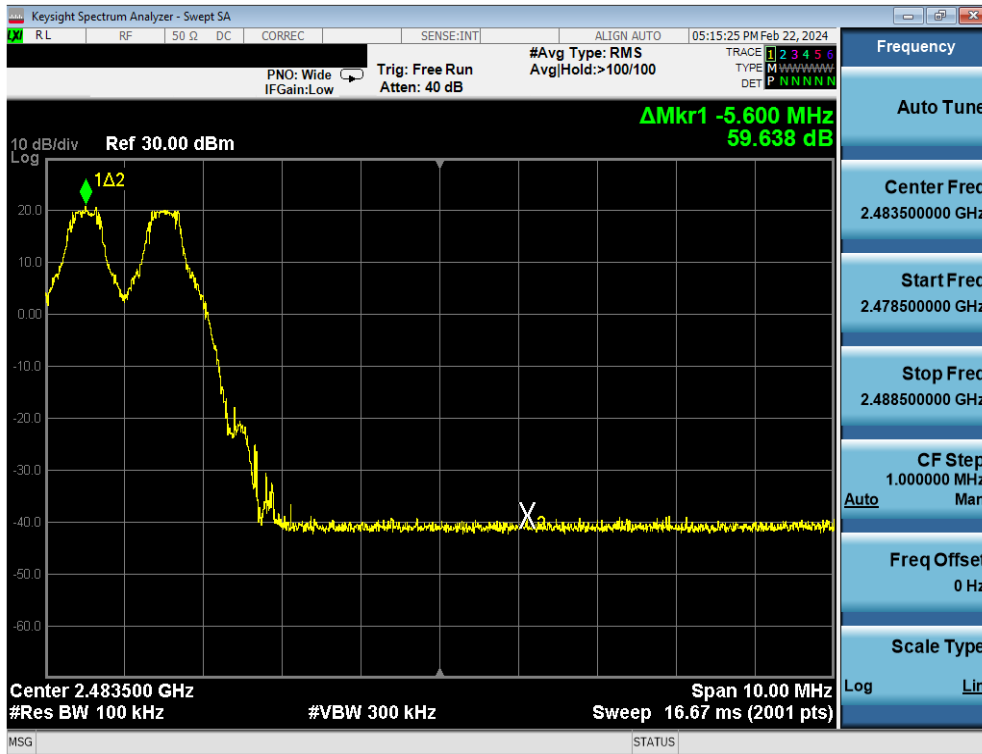


Plot 7-22. Band Edge Plot Antenna WF8 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 34 of 118

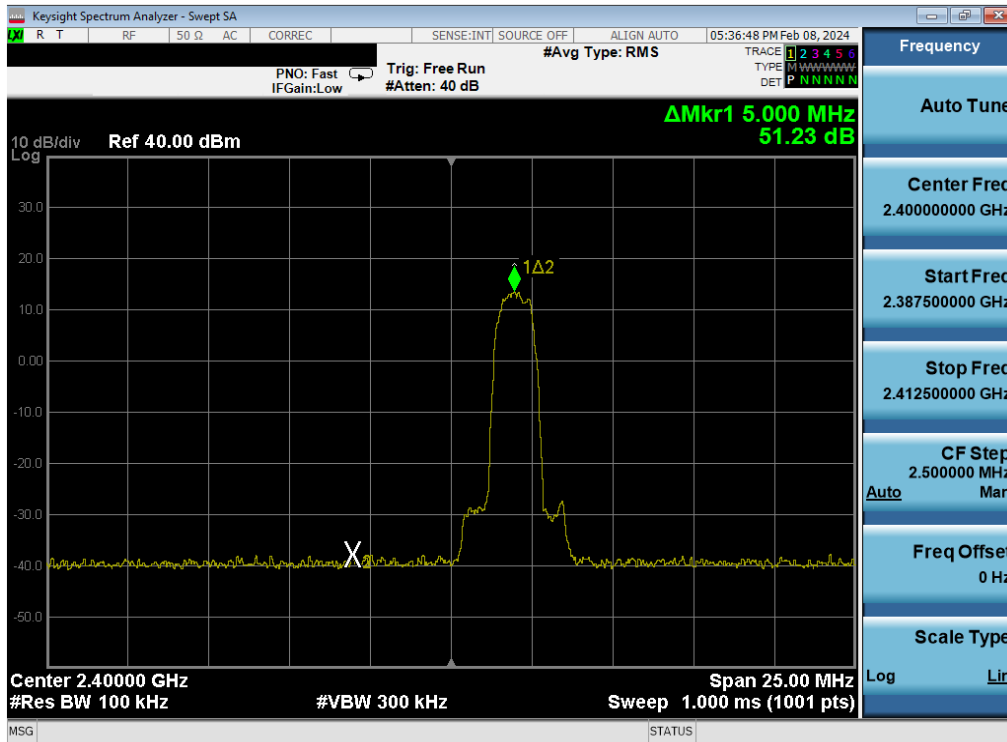


Plot 7-23. Band Edge Plot Antenna WF8 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

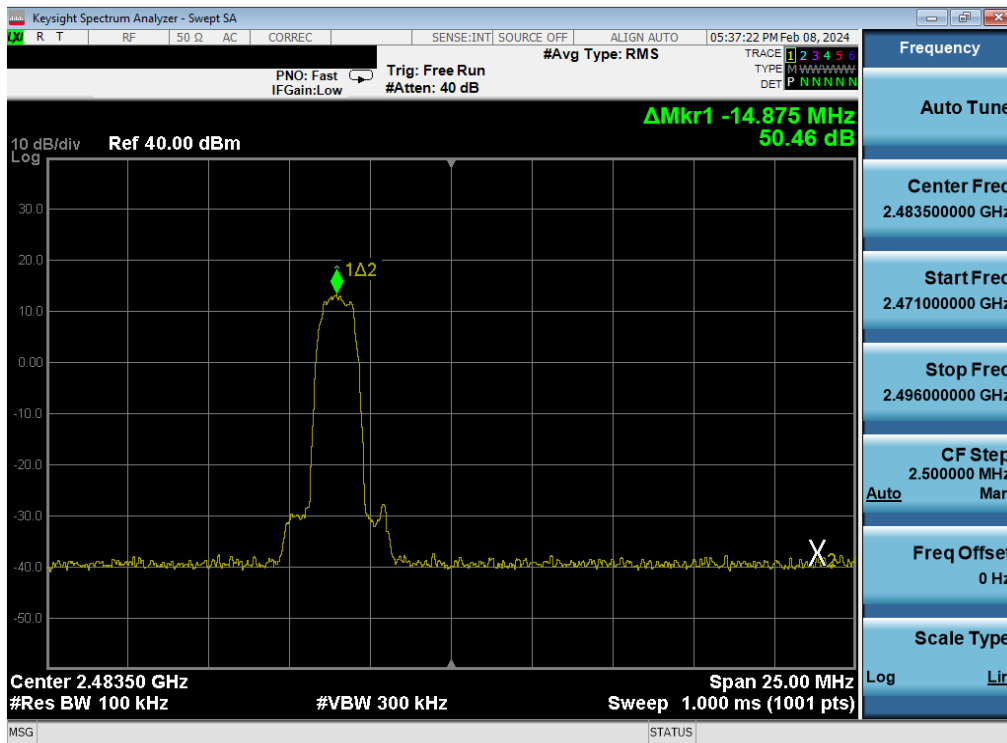

Plot 7-24. Band Edge Plot Antenna WF8 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 35 of 118

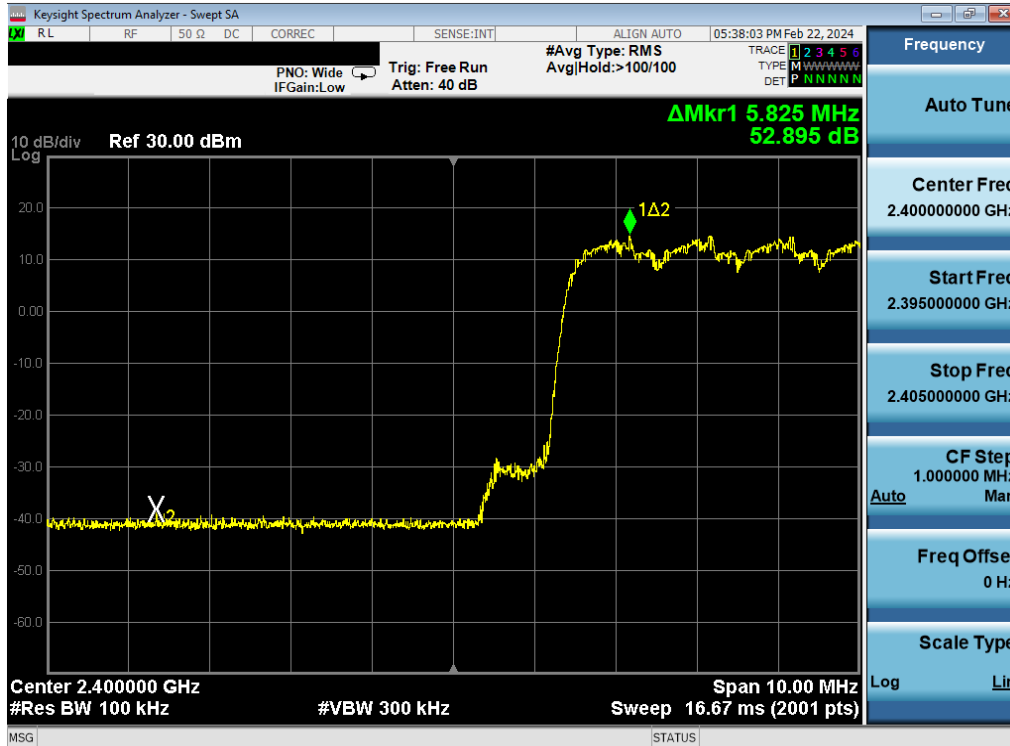


Plot 7-25. Band Edge Plot Antenna WF8 (Bluetooth with Hopping Enabled, 8DPSK, ePA)




Plot 7-26. Band Edge Plot Antenna WF8 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 36 of 118

Antenna WF7

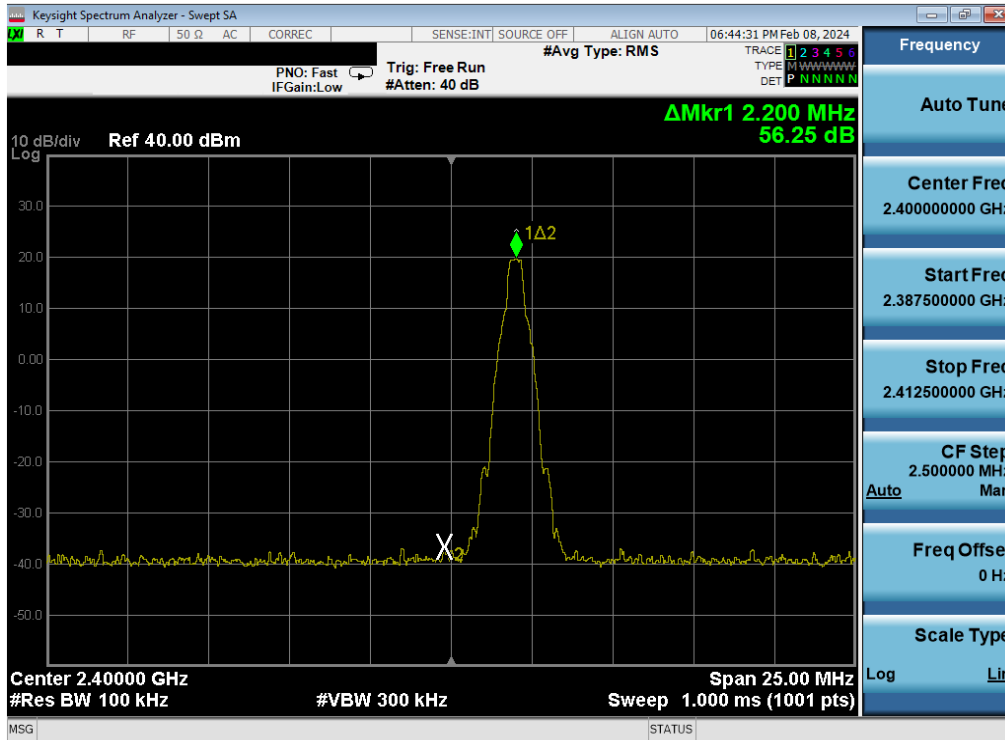


Plot 7-27. Band Edge Plot Antenna WF7 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

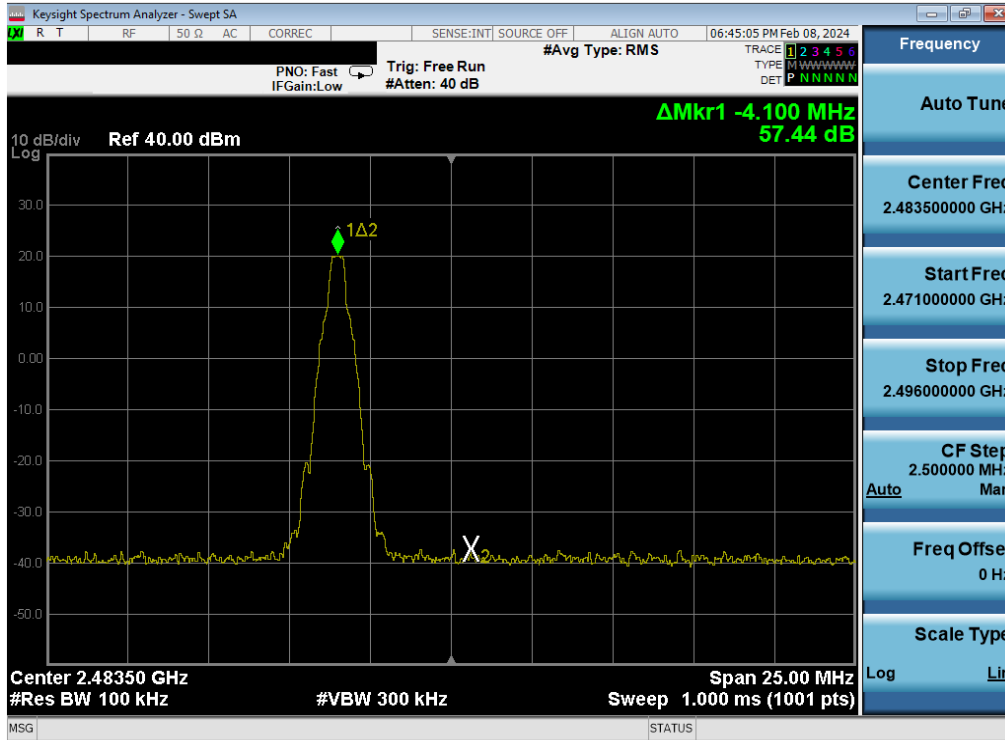


Plot 7-28. Band Edge Plot Antenna WF7 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 37 of 118

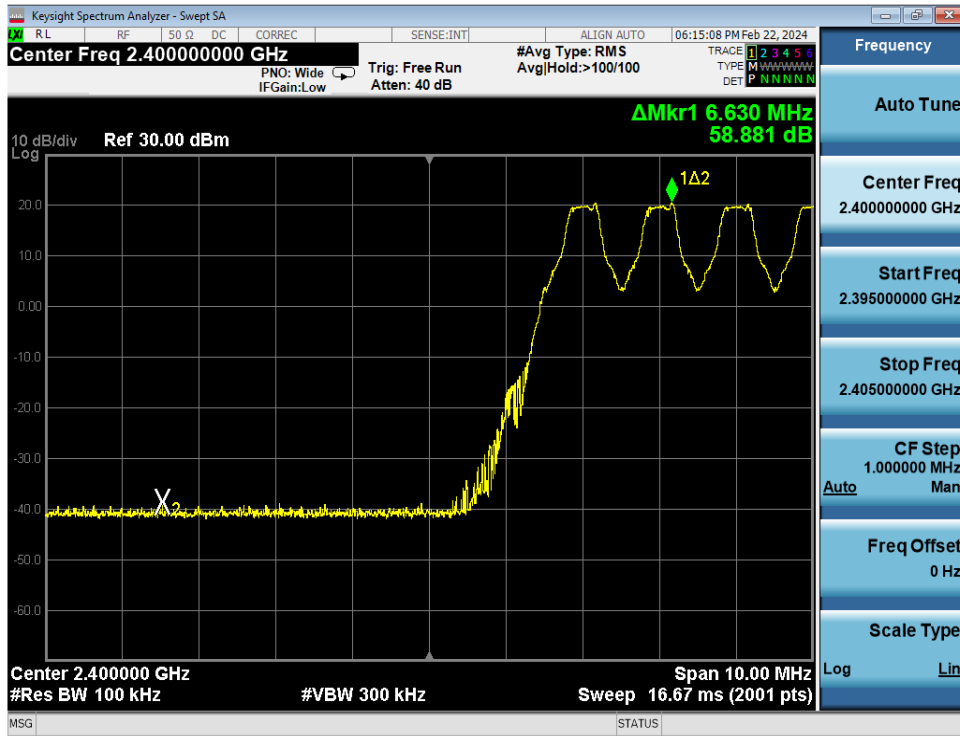


Plot 7-29. Band Edge Plot Antenna WF7 (Bluetooth with Hopping Enabled, GFSK, ePA)

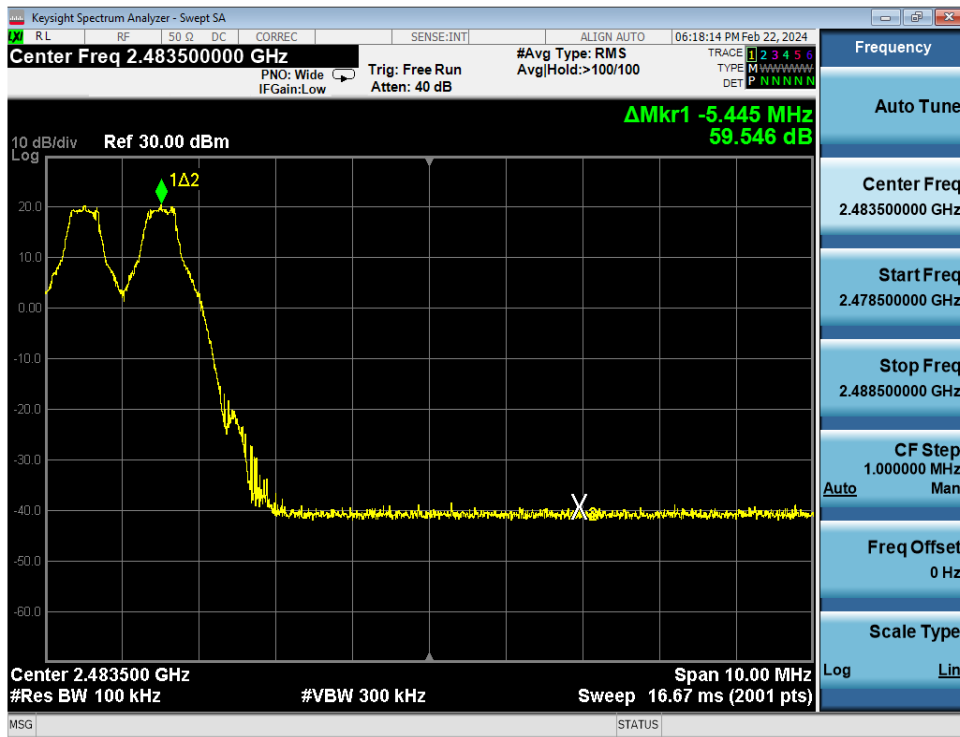


Plot 7-30. Band Edge Plot Antenna WF7 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 38 of 118

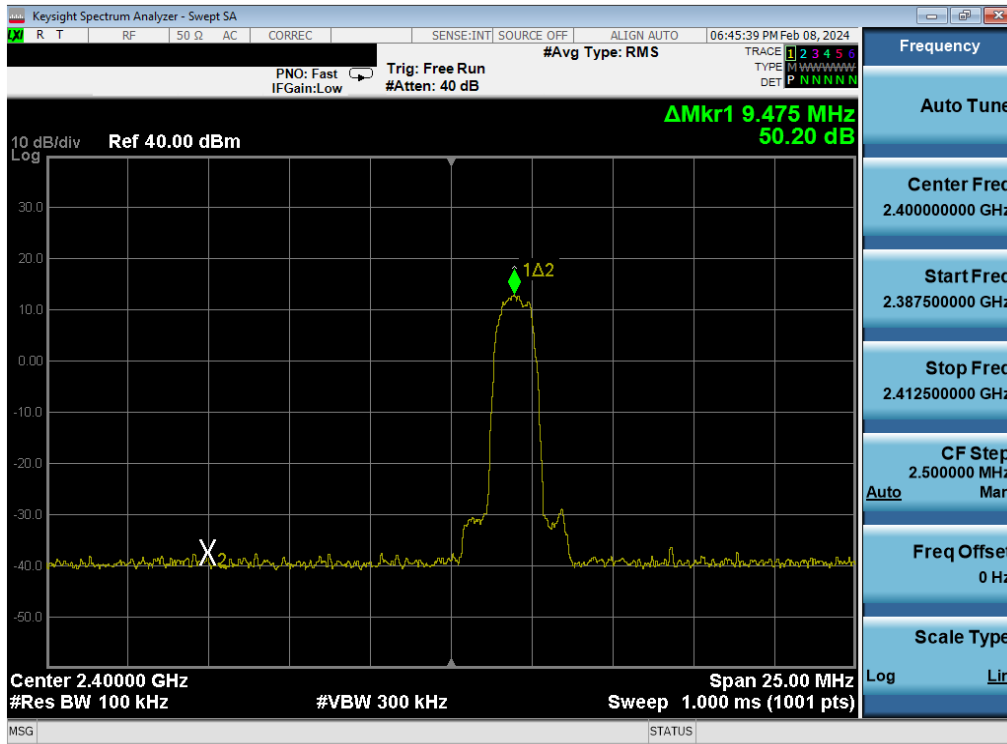


Plot 7-31. Band Edge Plot Antenna WF7 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

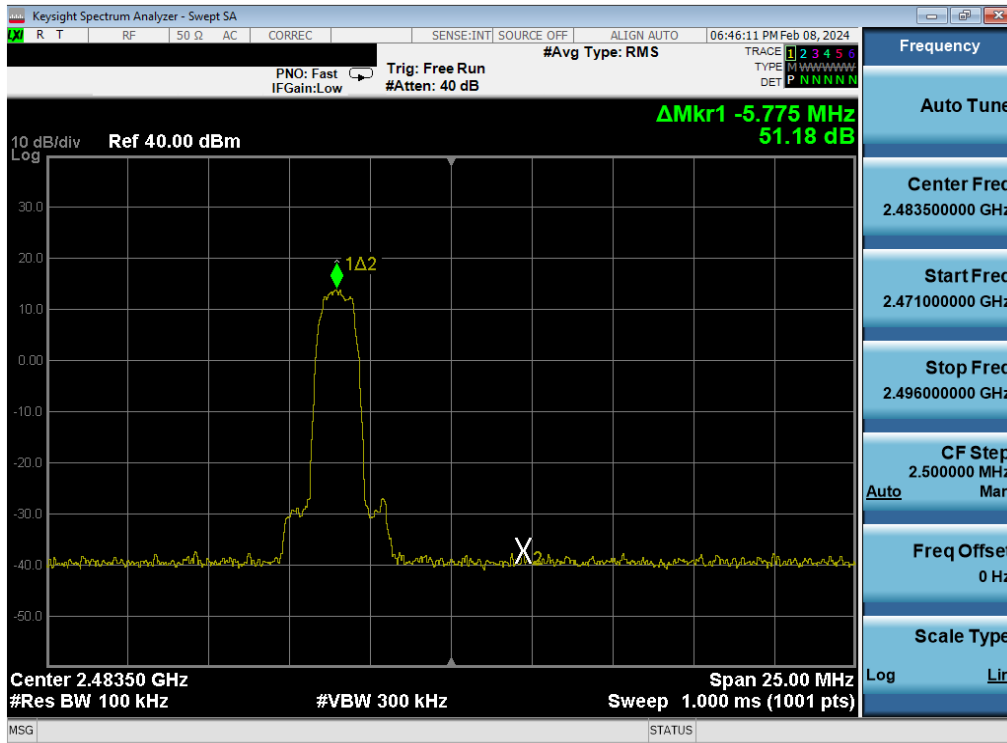


Plot 7-32. Band Edge Plot Antenna WF7 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 39 of 118

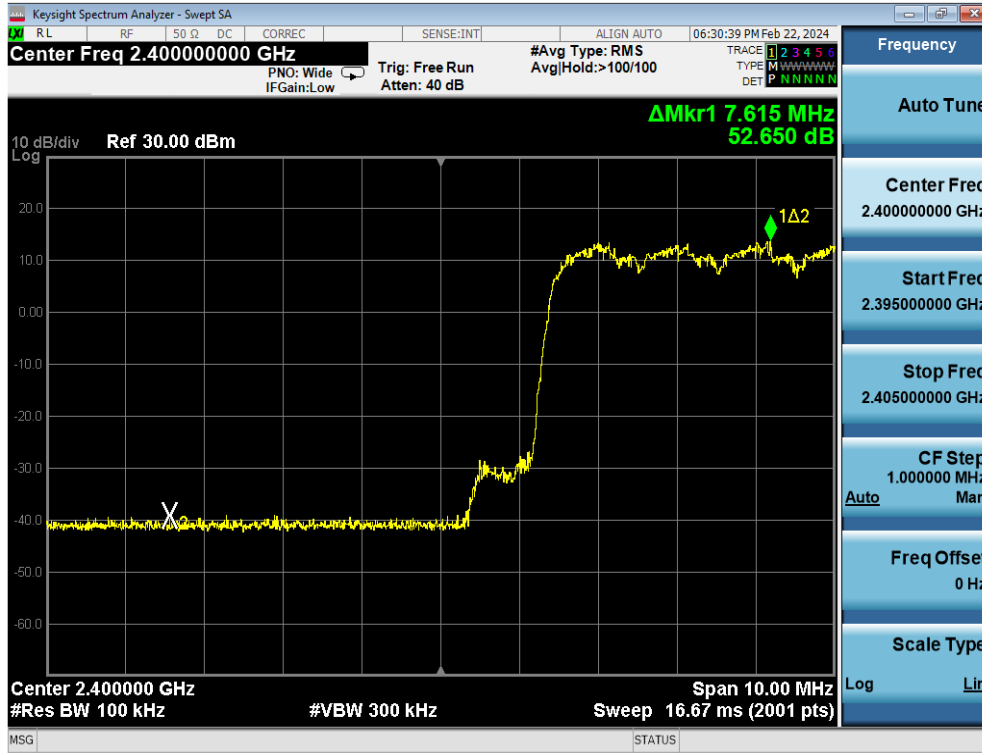


Plot 7-33. Band Edge Plot Antenna WF7 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

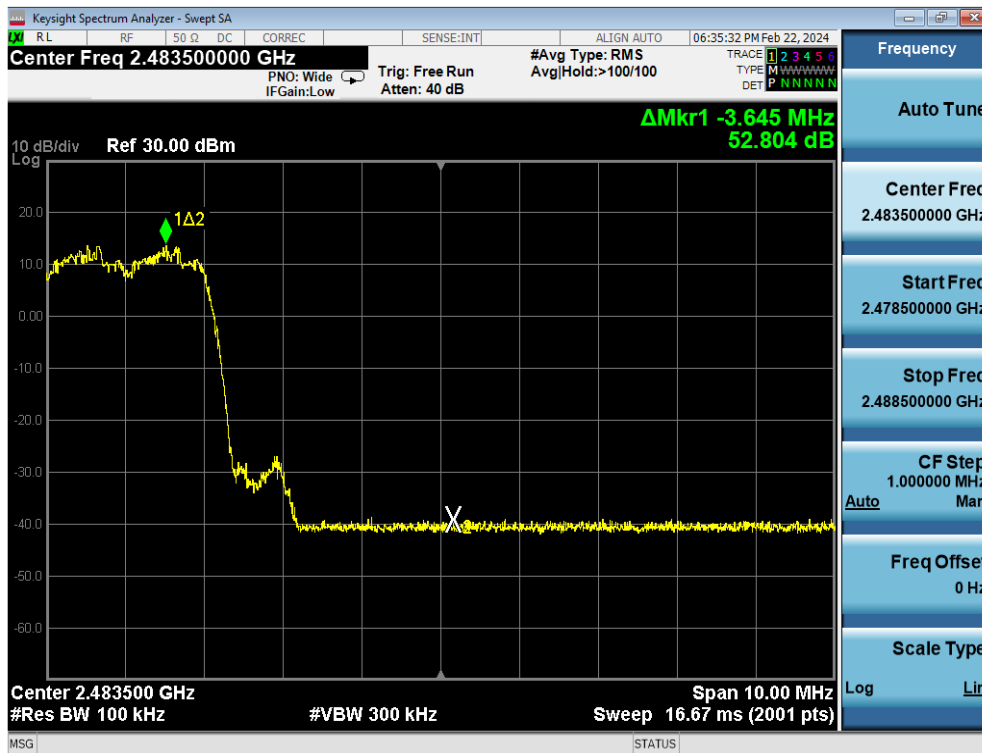


Plot 7-34. Band Edge Plot Antenna WF7 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 40 of 118

Antenna WF9

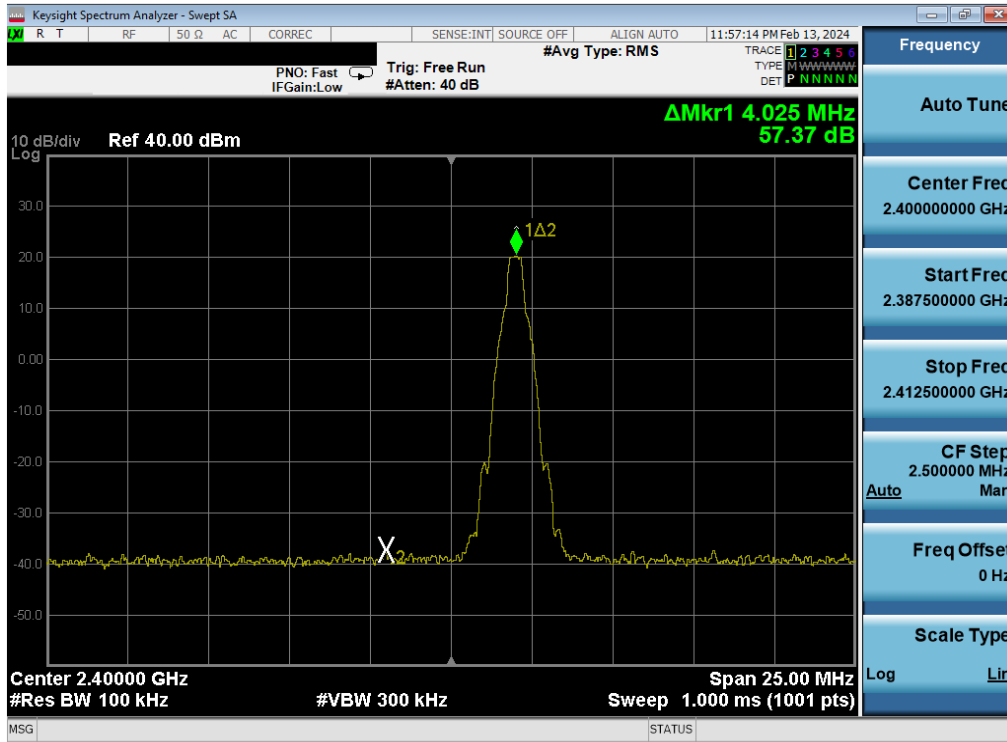


Plot 7-35. Band Edge Plot Antenna WF9 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

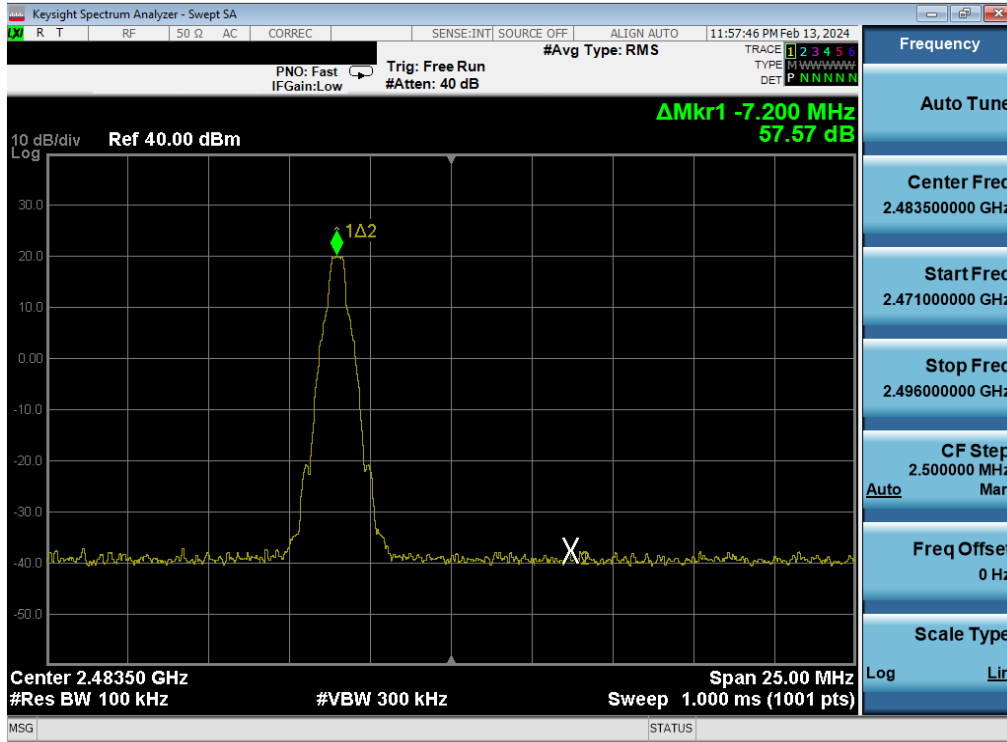


Plot 7-36. Band Edge Plot Antenna WF9 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 41 of 118

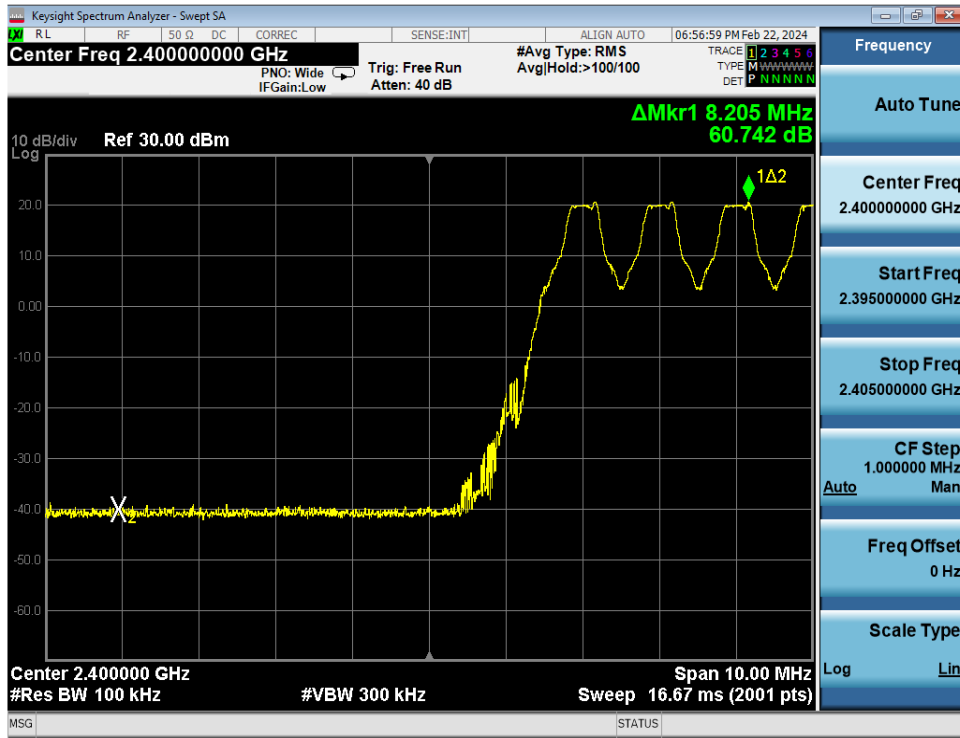


Plot 7-37. Band Edge Plot Antenna WF9 (Bluetooth with Hopping Enabled, GFSK, ePA)

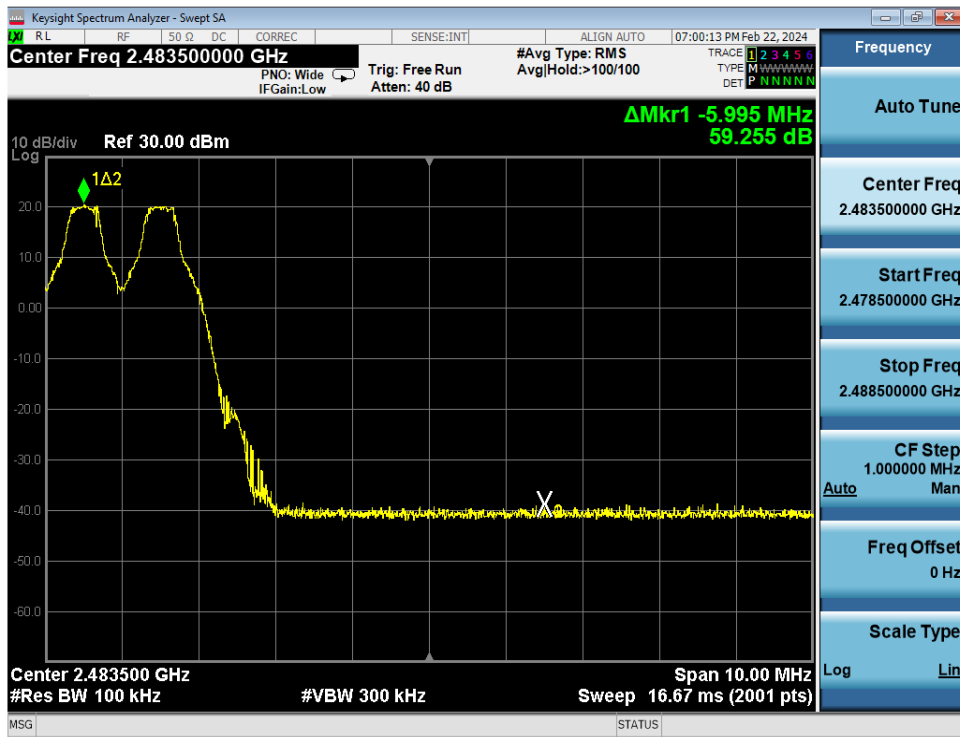


Plot 7-38. Band Edge Plot Antenna WF9 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 42 of 118

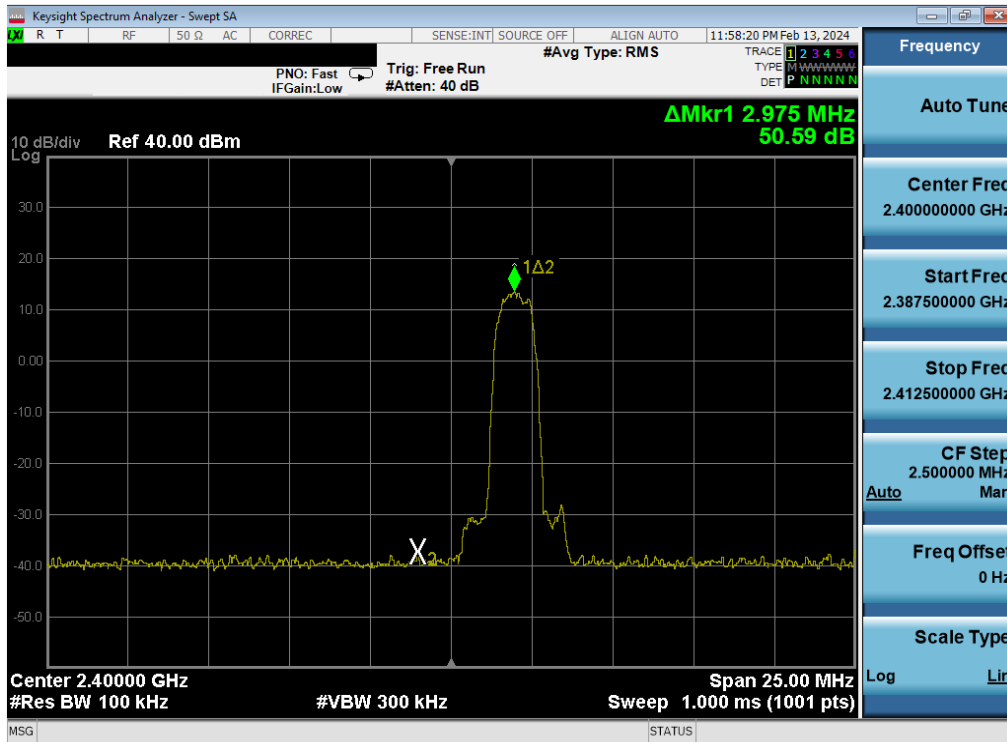


Plot 7-39. Band Edge Plot Antenna WF9 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

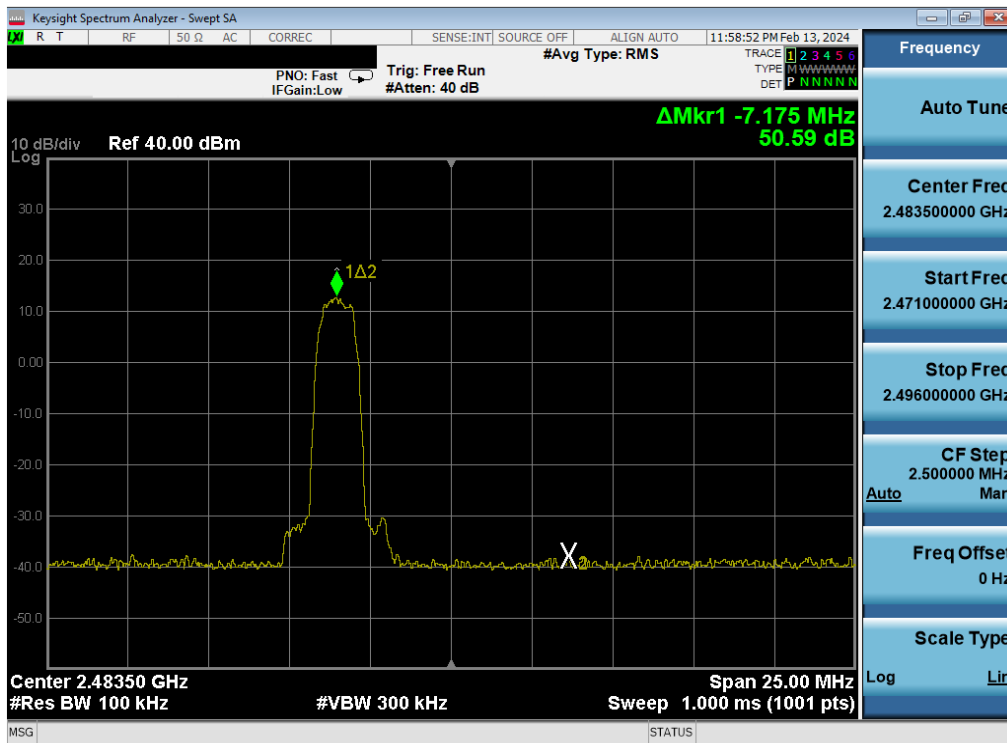


Plot 7-40. Band Edge Plot Antenna WF9 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 43 of 118

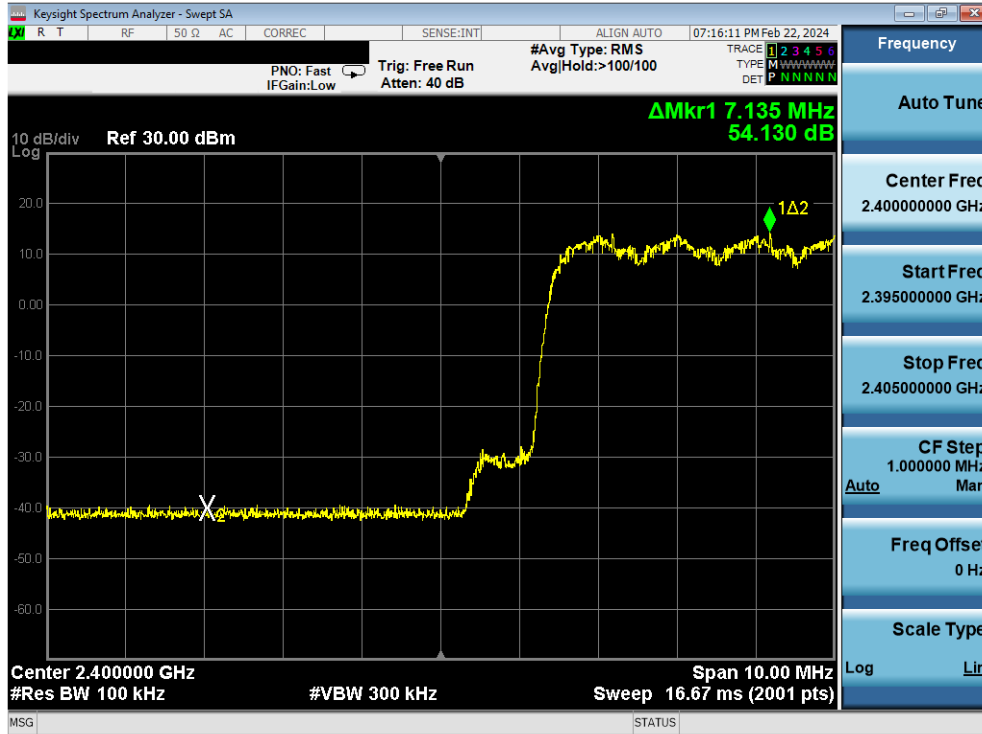

Plot 7-41. Band Edge Plot Antenna WF9 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

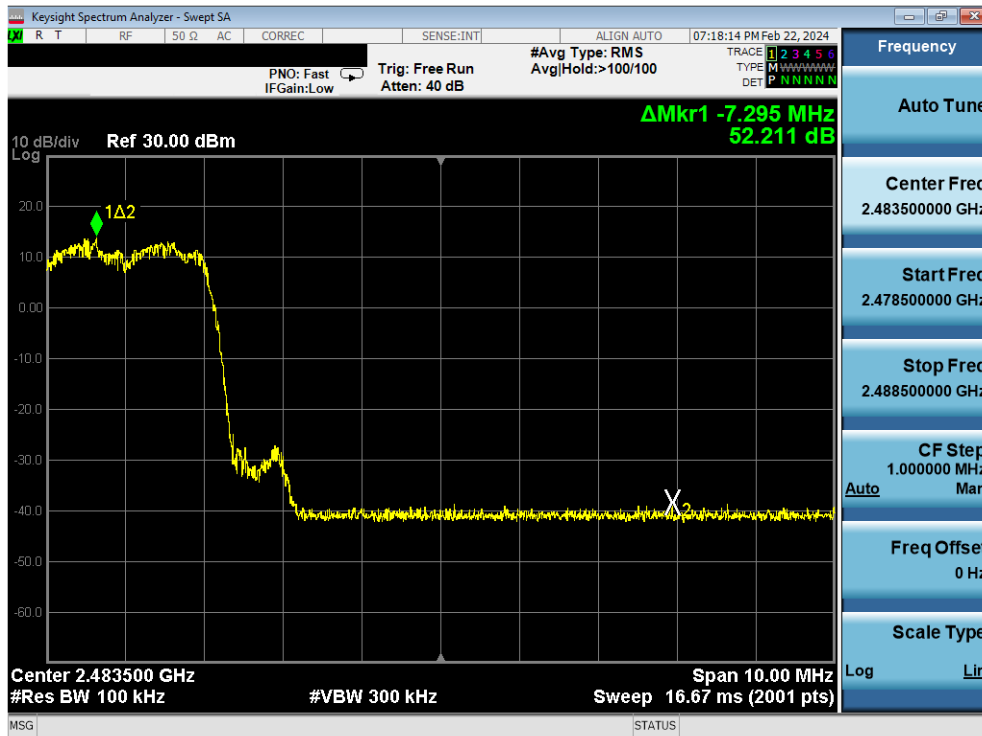

Plot 7-42. Band Edge Plot Antenna WF9 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 44 of 118

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(b)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW \geq RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 45 of 118

V 10.6 09/13/2023


Antenna WF8

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured Channel Separation [MHz]	Min. Channel Separation [MHz]	Pass/Fail
2441	1.0	GFSK	ePA	39	1.00	0.61	Pass
2441	3.0	8DPSK	ePA	39	1.00	0.90	Pass


Table 7-13. Minimum Channel Separation Antenna WF8

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 46 of 118

V 10.6 09/13/2023

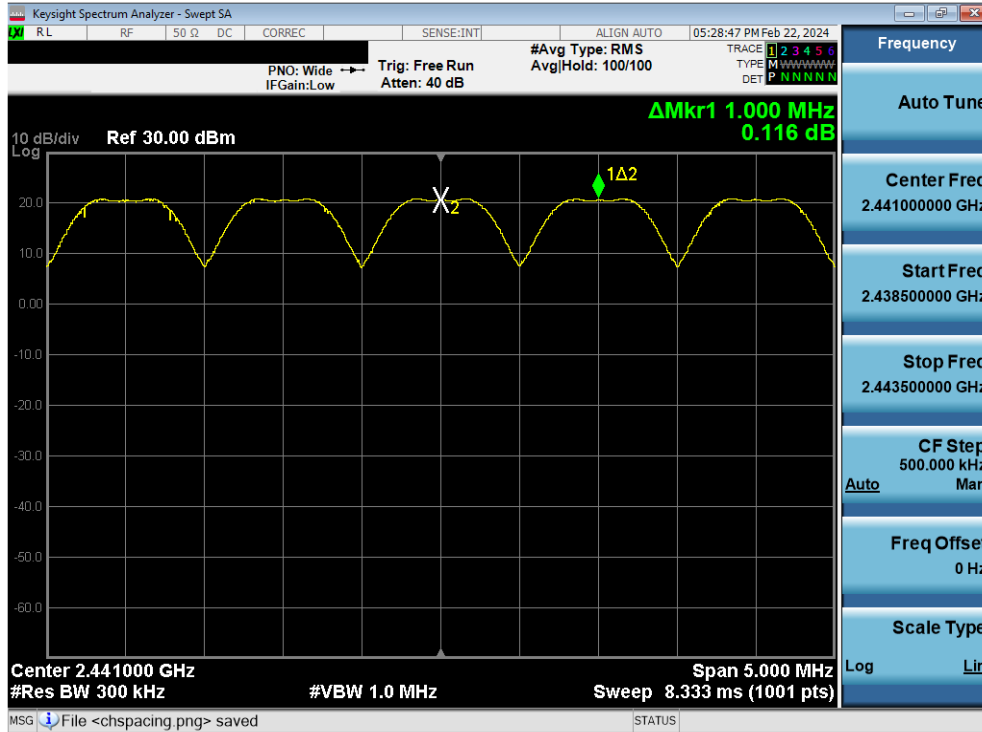

Plot 7-43. Channel Spacing Plot Antenna WF8 (Bluetooth, GFSK, ePA)

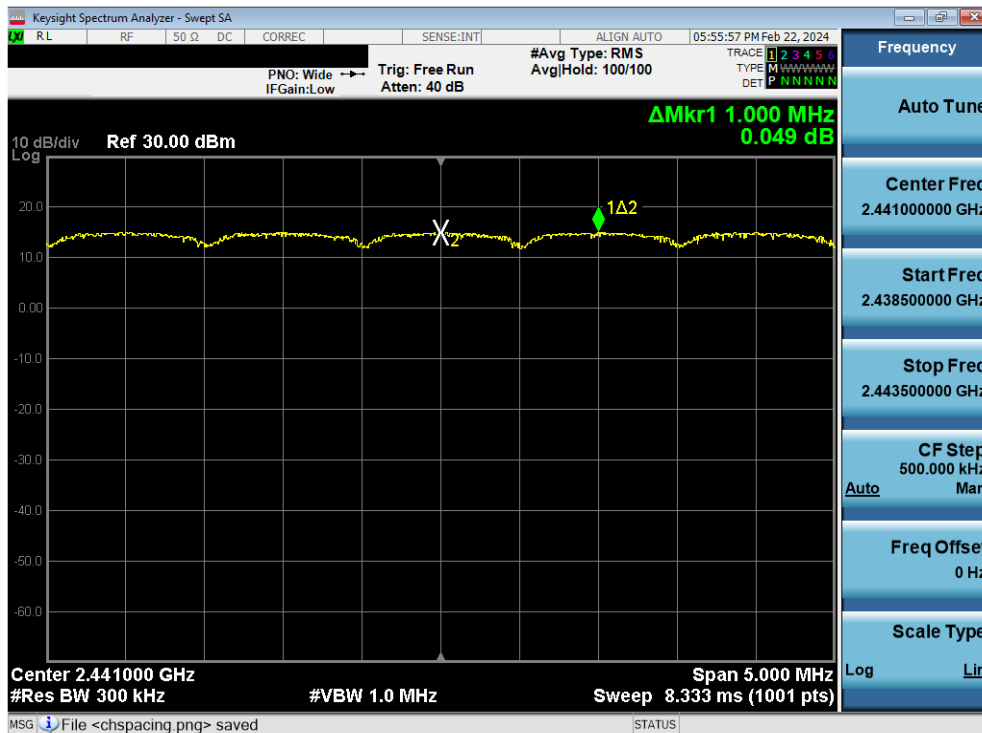

Plot 7-44. Channel Spacing Plot Antenna WF8 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 47 of 118


Antenna WF7

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured Channel Separation [MHz]	Min. Channel Separation [MHz]	Pass/Fail
2441	1.0	GFSK	ePA	39	1.00	0.61	Pass
2441	3.0	8DPSK	ePA	39	1.00	0.90	Pass


Table 7-14. Minimum Channel Separation Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 48 of 118

V 10.6 09/13/2023

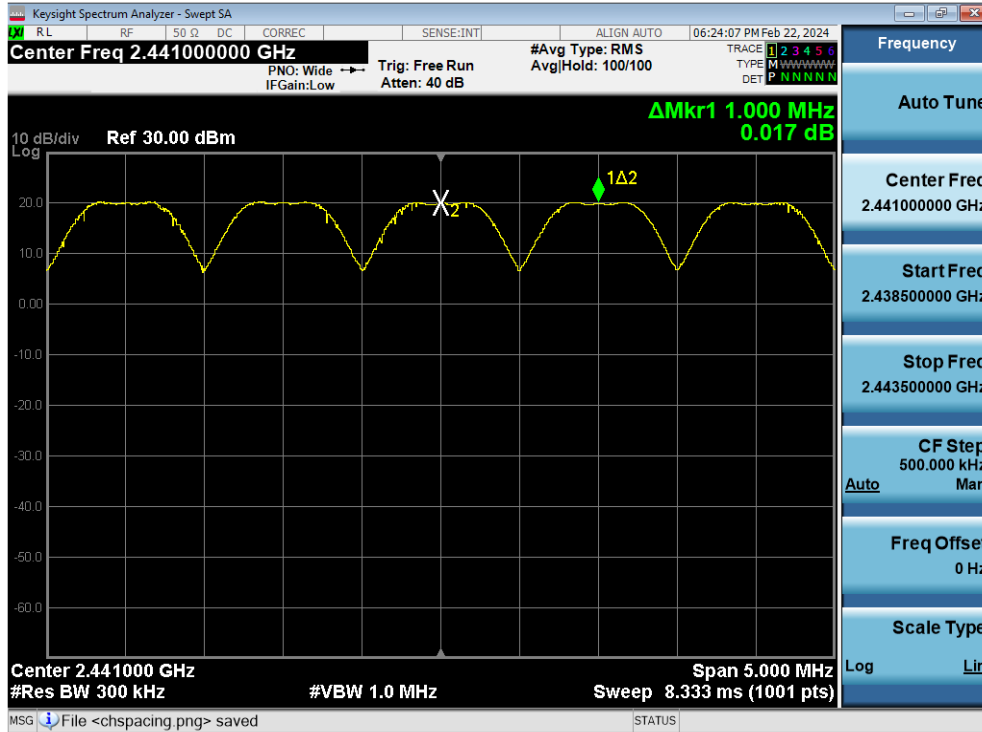

Plot 7-45. Channel Spacing Plot Antenna WF7 (Bluetooth, GFSK, ePA)

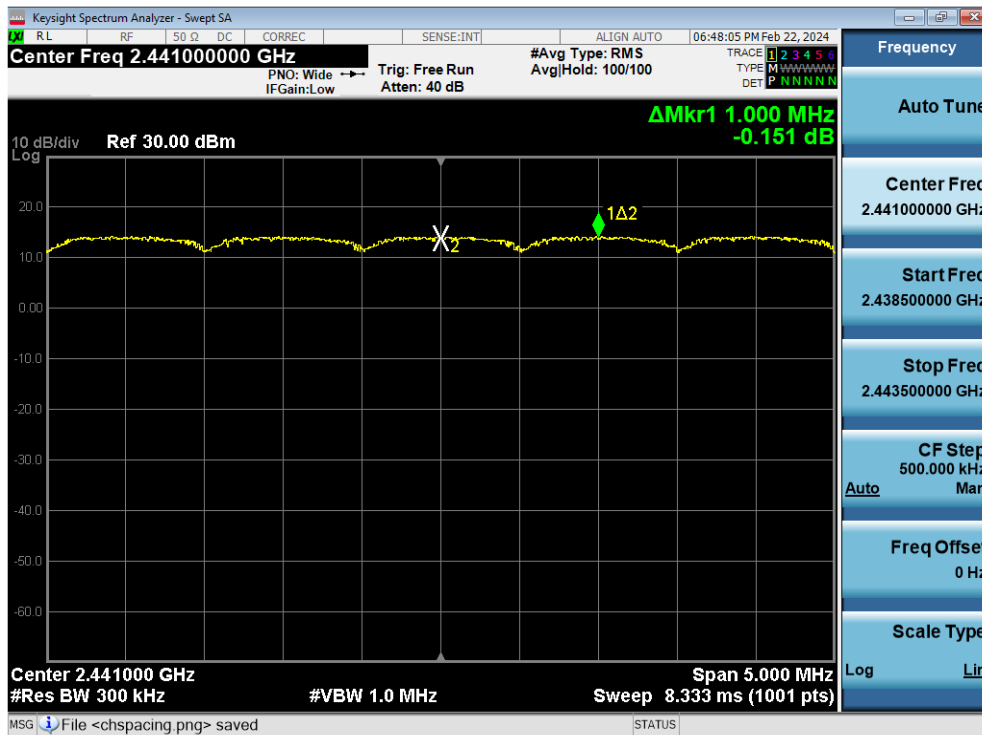

Plot 7-46. Channel Spacing Plot Antenna WF7 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 49 of 118


Antenna WF9

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured Channel Separation [MHz]	Min. Channel Separation [MHz]	Pass/Fail
2441	1.0	GFSK	ePA	39	1.00	0.61	Pass
2441	3.0	8DPSK	ePA	39	1.00	0.90	Pass


Table 7-15. Minimum Channel Separation Antenna WF9

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 50 of 118

V 10.6 09/13/2023

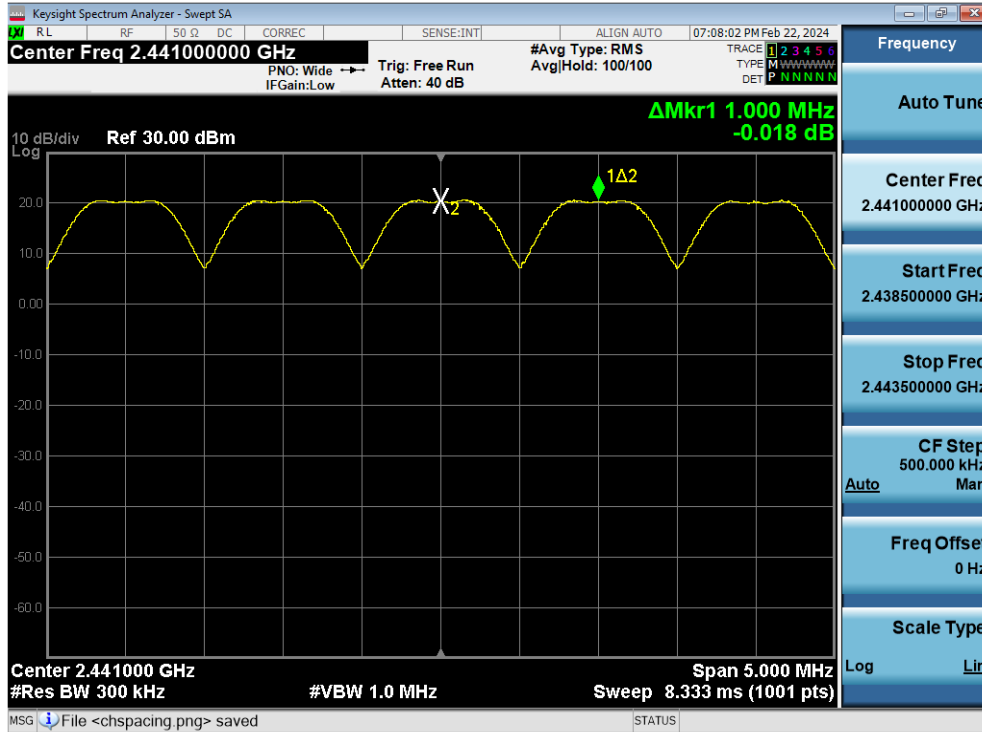

Plot 7-47. Channel Spacing Plot Antenna WF9 (Bluetooth, GFSK, ePA)

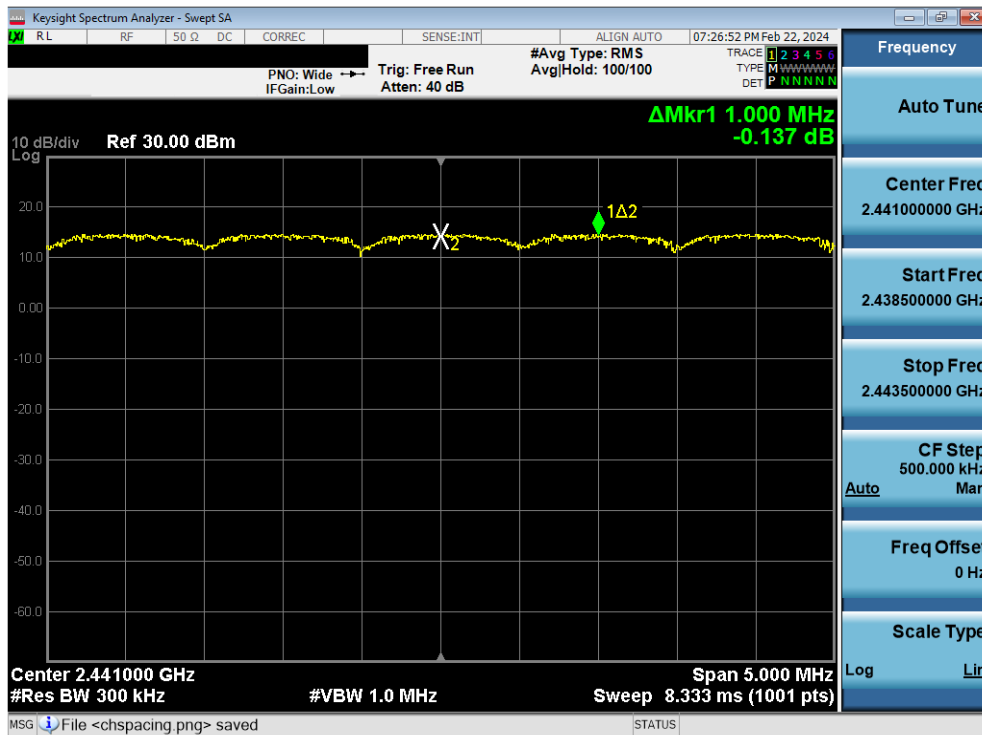

Plot 7-48. Channel Spacing Plot Antenna WF9 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 51 of 118

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(d)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. **The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW \leq channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


Test Notes

All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 52 of 118

V 10.6 09/13/2023

Antenna WF8

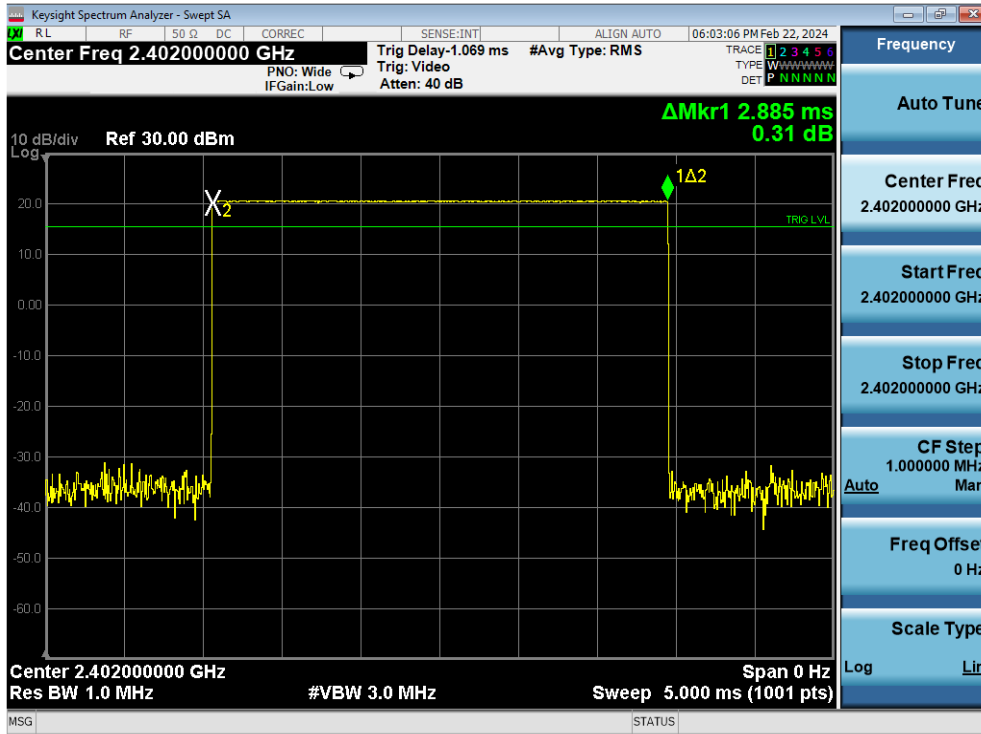


Plot 7-49. Time of Occupancy Plot Antenna WF8 (Bluetooth, GFSK, ePA)

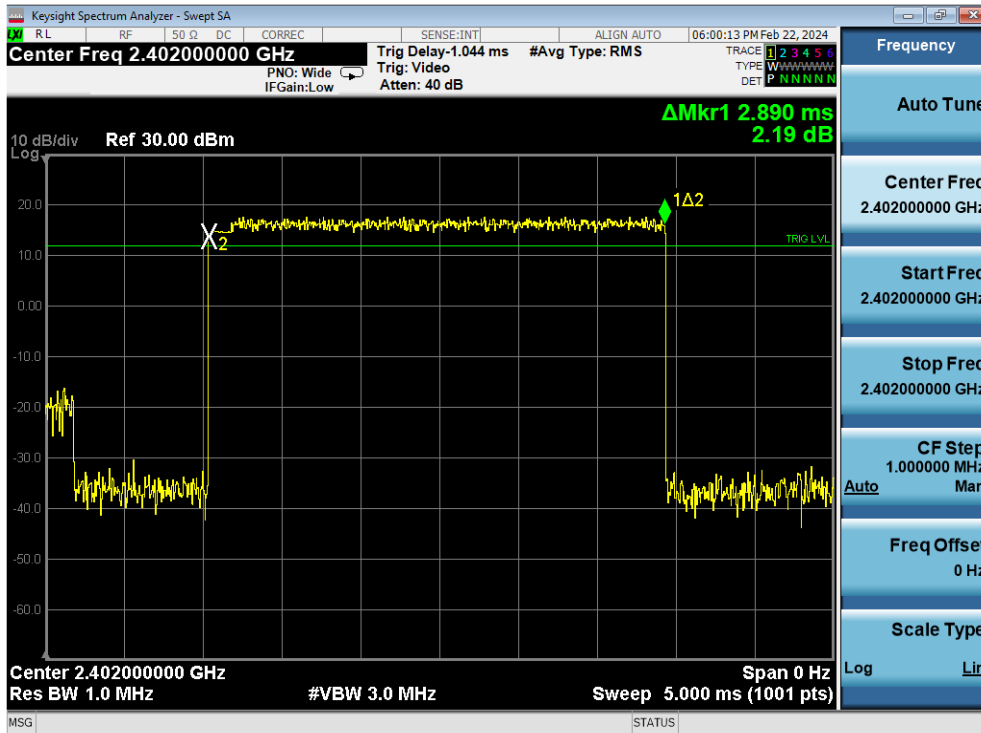


Plot 7-50. Time of Occupancy Plot Antenna WF8 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 53 of 118

Antenna WF7

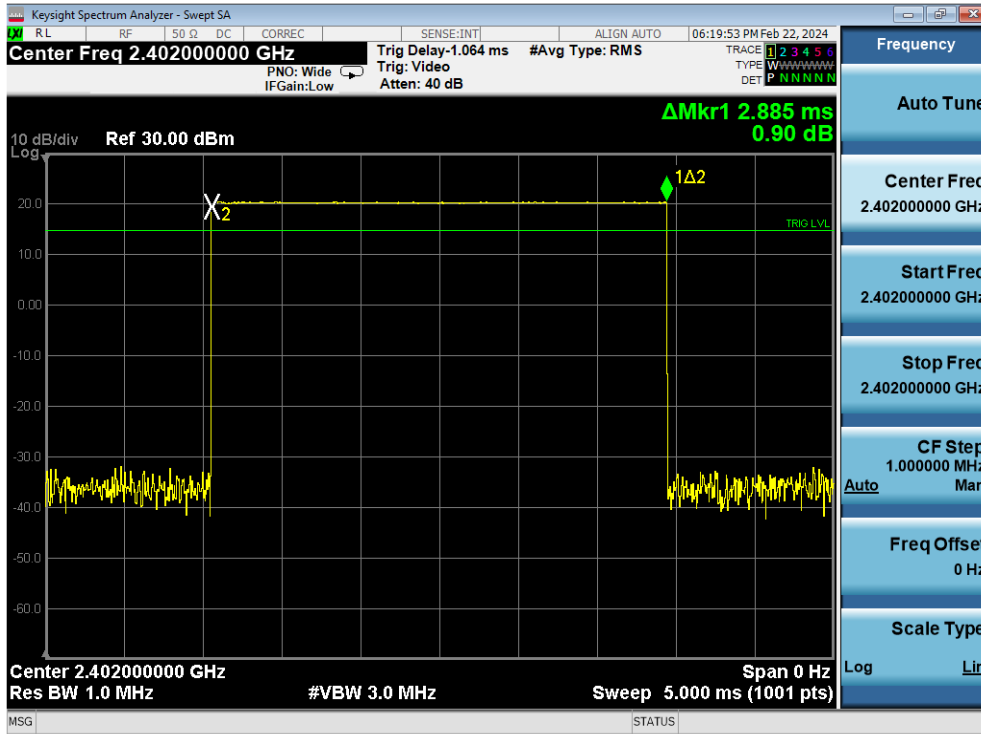


Plot 7-51. Time of Occupancy Plot Antenna WF7 (Bluetooth, GFSK, ePA)

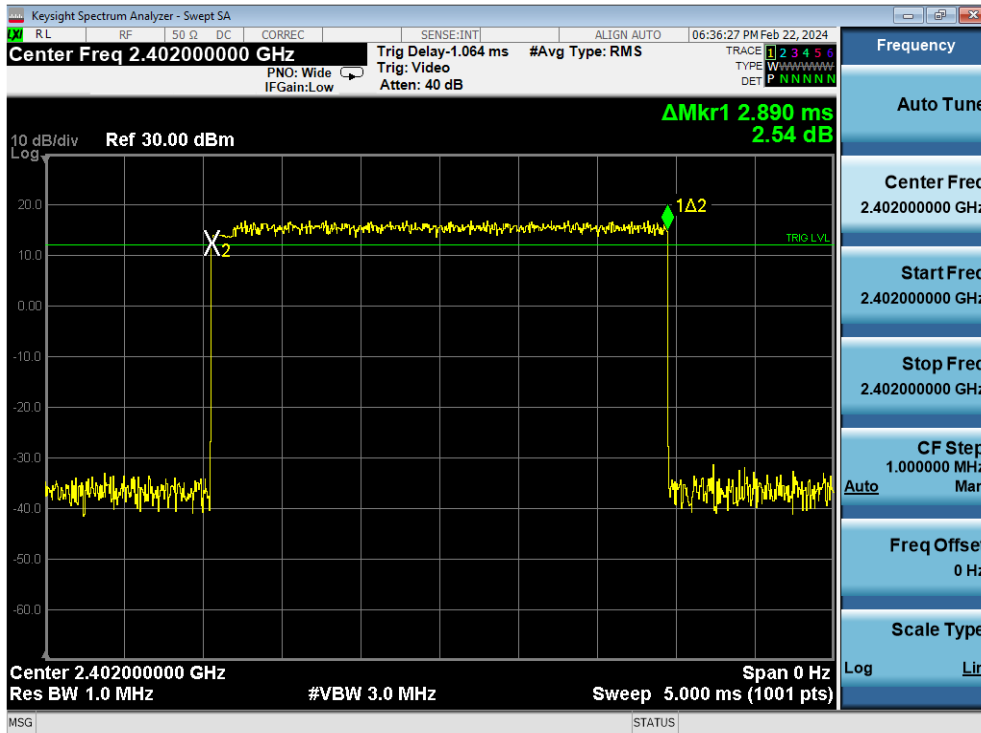


Plot 7-52. Time of Occupancy Plot Antenna WF7 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 54 of 118

Antenna WF9

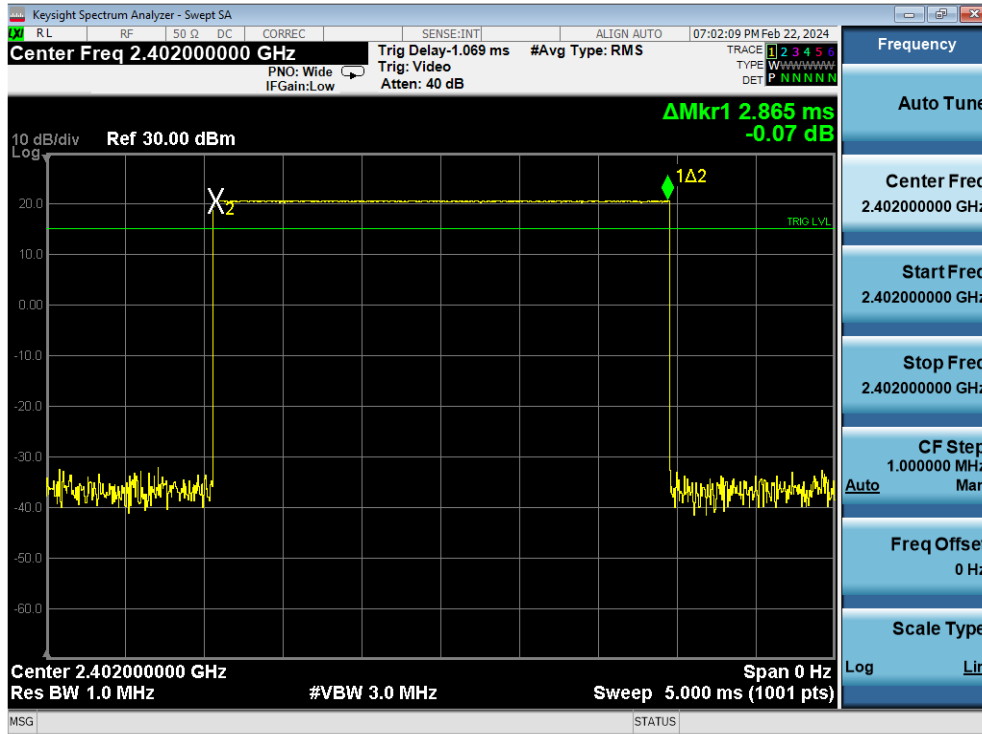

Plot 7-53. Time of Occupancy Plot Antenna WF9 (Bluetooth, GFSK, ePA)

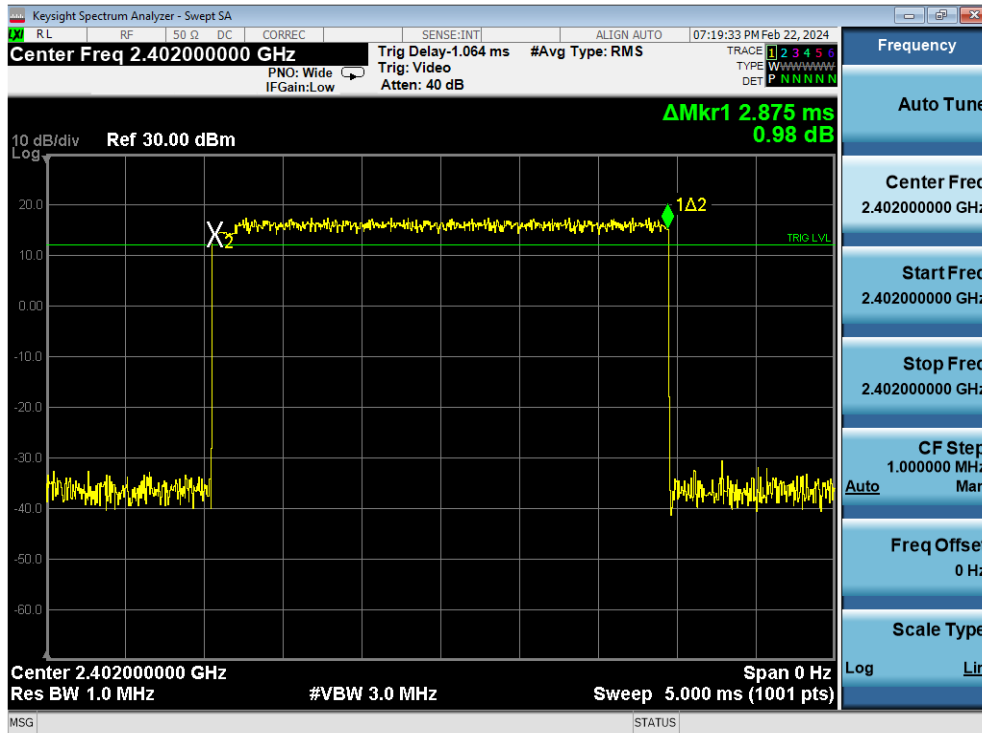

Plot 7-54. Time of Occupancy Plot Antenna WF9 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 55 of 118

Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- 266.67 hops/second / 79 channels = 3.38 hops/second (# of hops/second on one channel)
- 3.38 hops/second/channel x 31.6 seconds = 106.67 hops (# hops over a 31.6 second period)
- 106.67 hops x 2.89 ms/channel = 308.28 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- 133.3 hops/s / 20 channels = 6.67 hops/second (# of hops/second on one channel)
- 6.67 hops/s / channel x 8 seconds = 53.34 hops (# hops over a 8 second period)
- 53.34 hops x 2.89 ms/channel = 154.15 ms (worst case dwell time for one channel in AFH mode)

Test Result

The measured worst case dwell time is below the limit of 0.4s.

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 56 of 118

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(d)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW \geq RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-6. Test Instrument & Measurement Setup


Test Notes

1. The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 57 of 118

V 10.6 09/13/2023

Antenna WF8

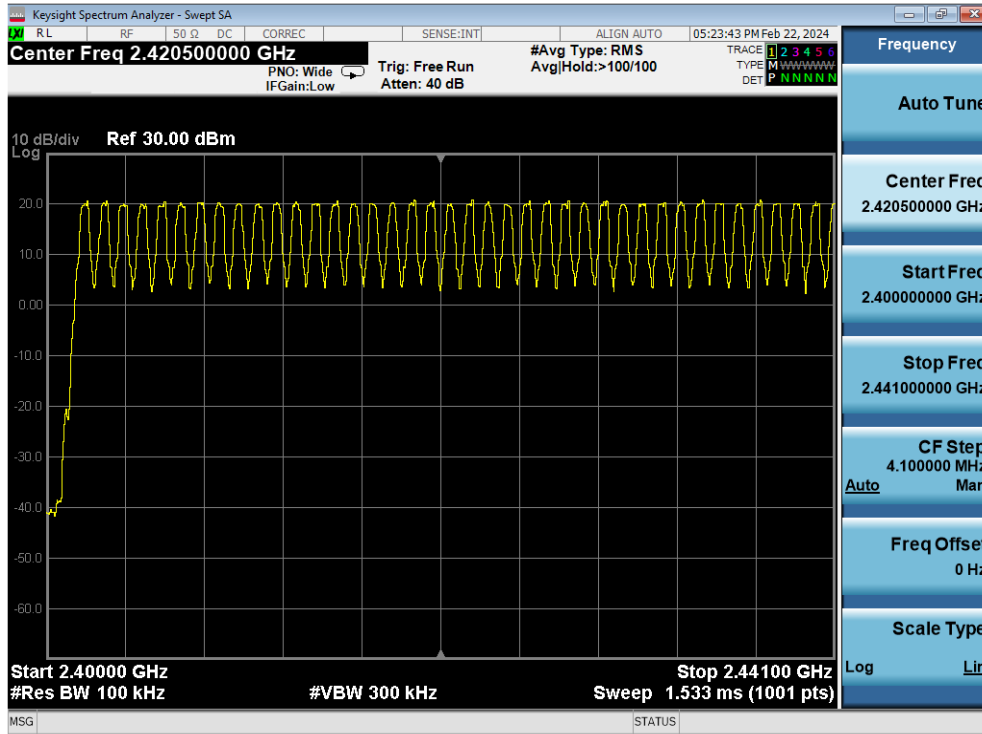


Plot 7-55. Low End Spectrum Channel Hopping Plot Antenna WF8 (Bluetooth, GFSK, ePA)

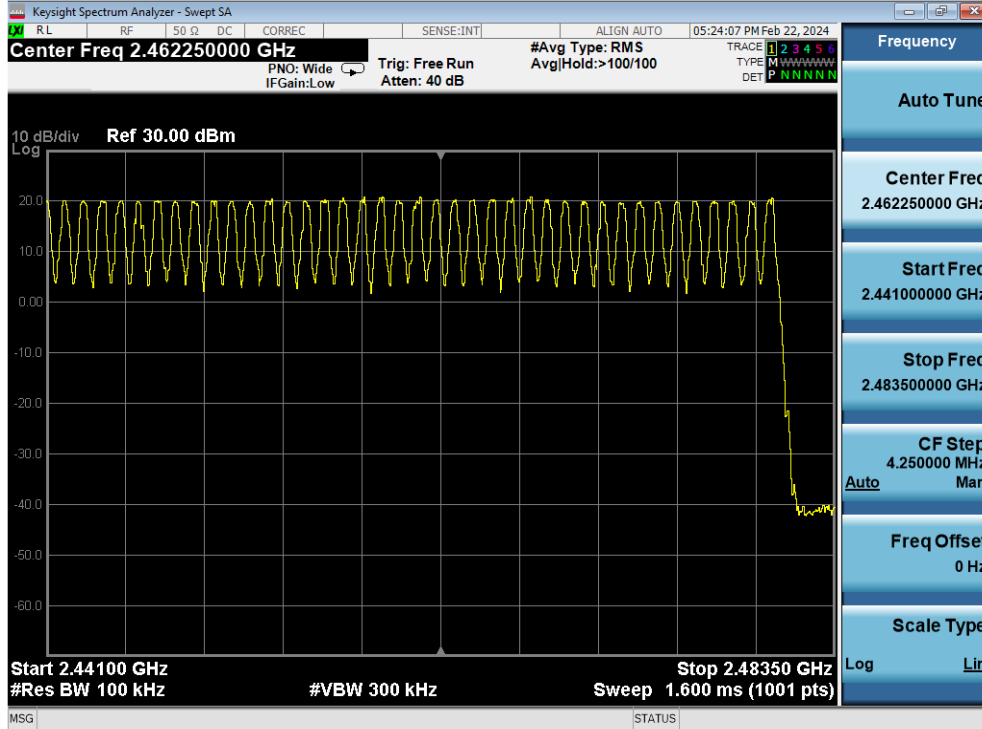


Plot 7-56. High End Spectrum Channel Hopping Plot Antenna WF8 (Bluetooth, GFSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 58 of 118

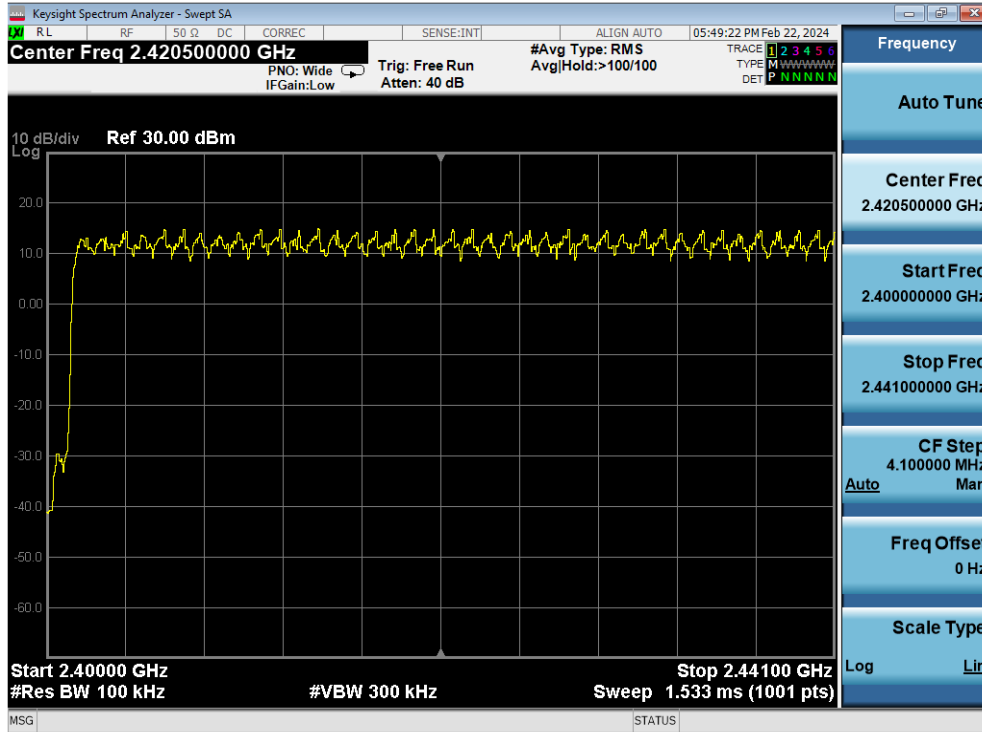


Plot 7-57. Low End Spectrum Channel Hopping Plot Antenna WF8 (Bluetooth, 8DPSK, ePA)

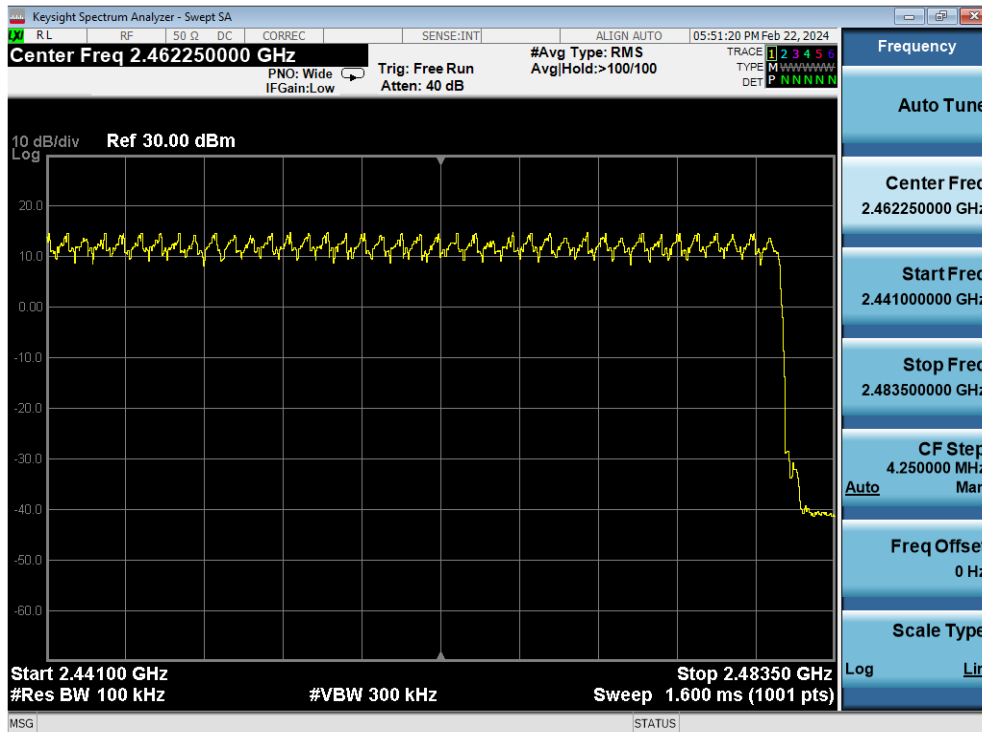


Plot 7-58. High End Spectrum Channel Hopping Plot Antenna WF8 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 59 of 118

Antenna WF7

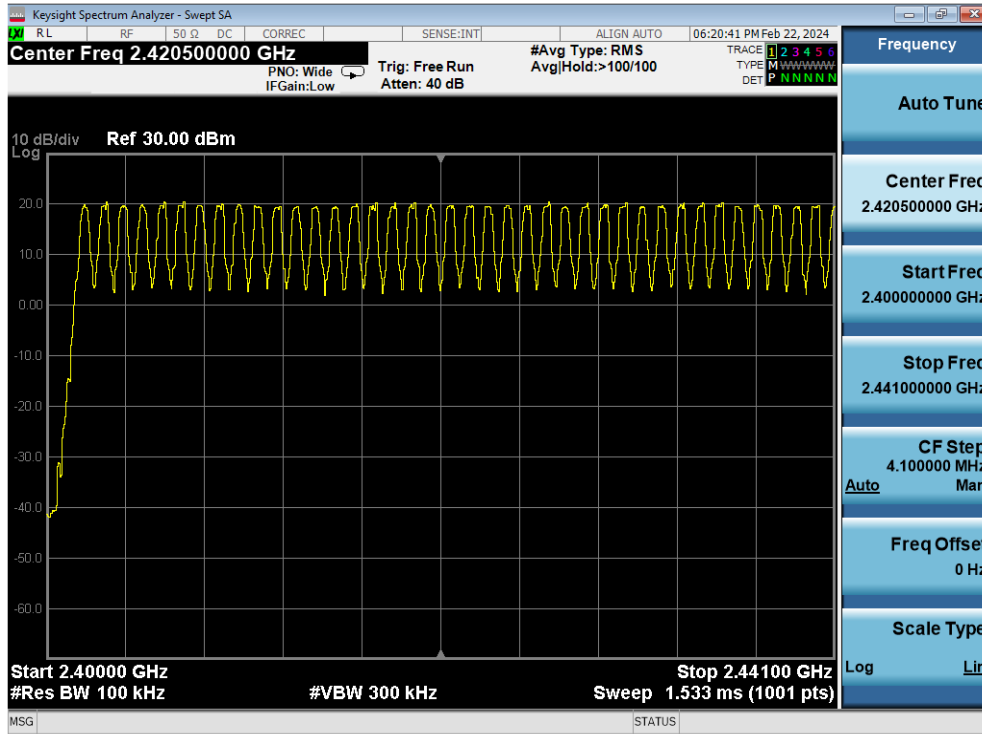


Plot 7-59. Low End Spectrum Channel Hopping Plot Antenna WF7 (Bluetooth, GFSK, ePA)

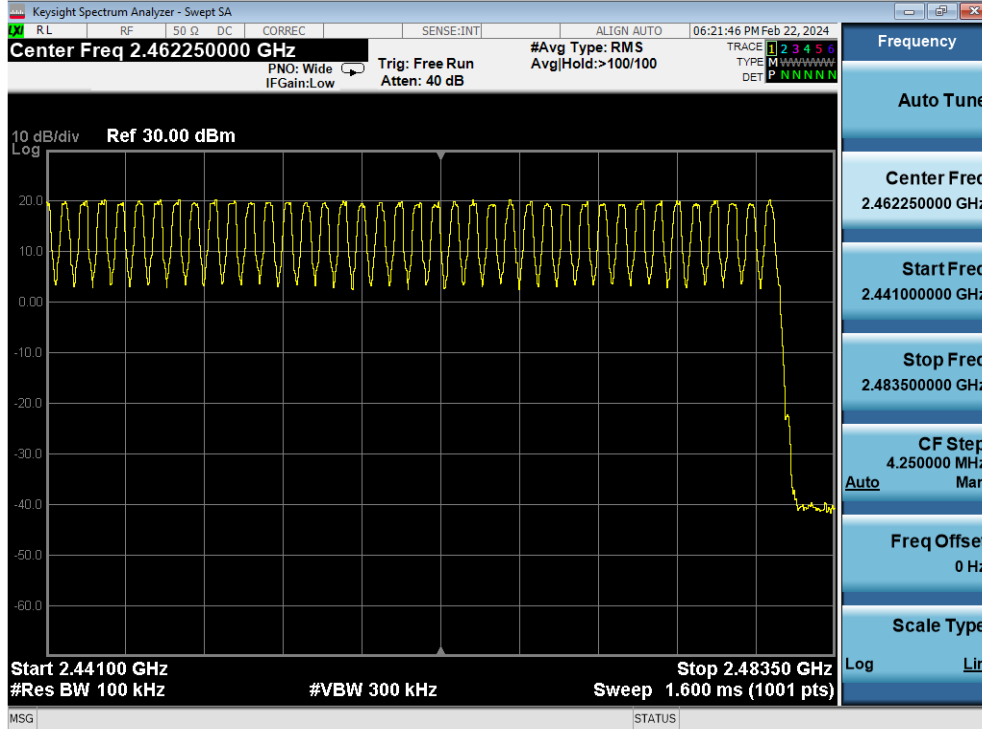


Plot 7-60. High End Spectrum Channel Hopping Plot Antenna WF7 (Bluetooth, GFSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 60 of 118

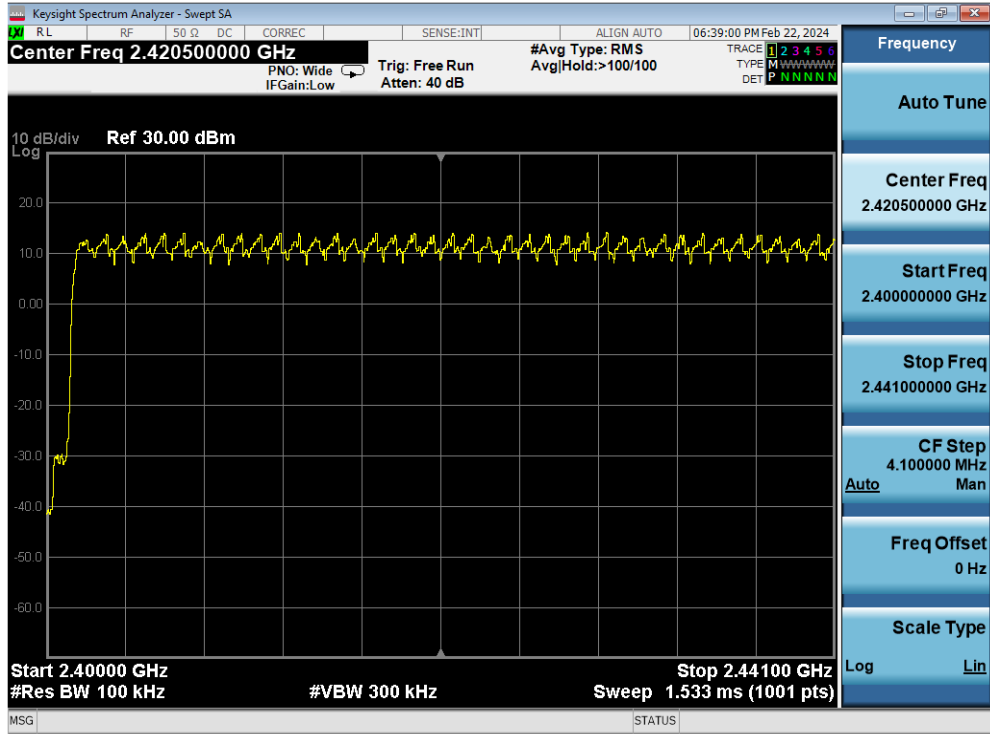


Plot 7-61. Low End Spectrum Channel Hopping Plot Antenna WF7 (Bluetooth, 8DPSK, ePA)

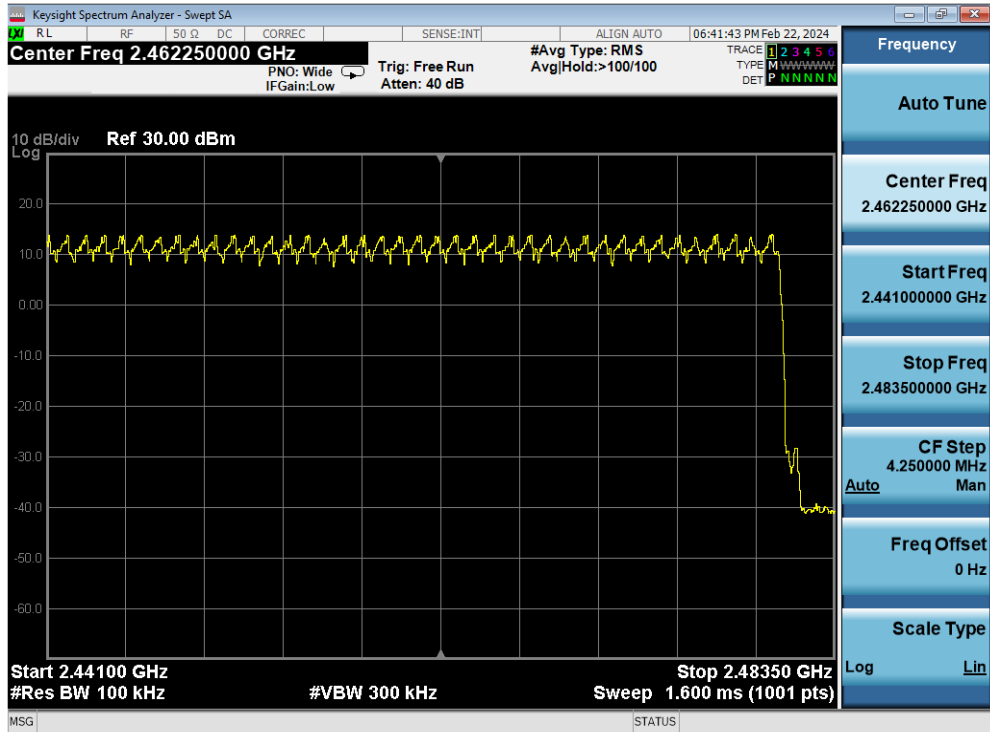


Plot 7-62. High End Spectrum Channel Hopping Plot Antenna WF7 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 61 of 118

Antenna WF9

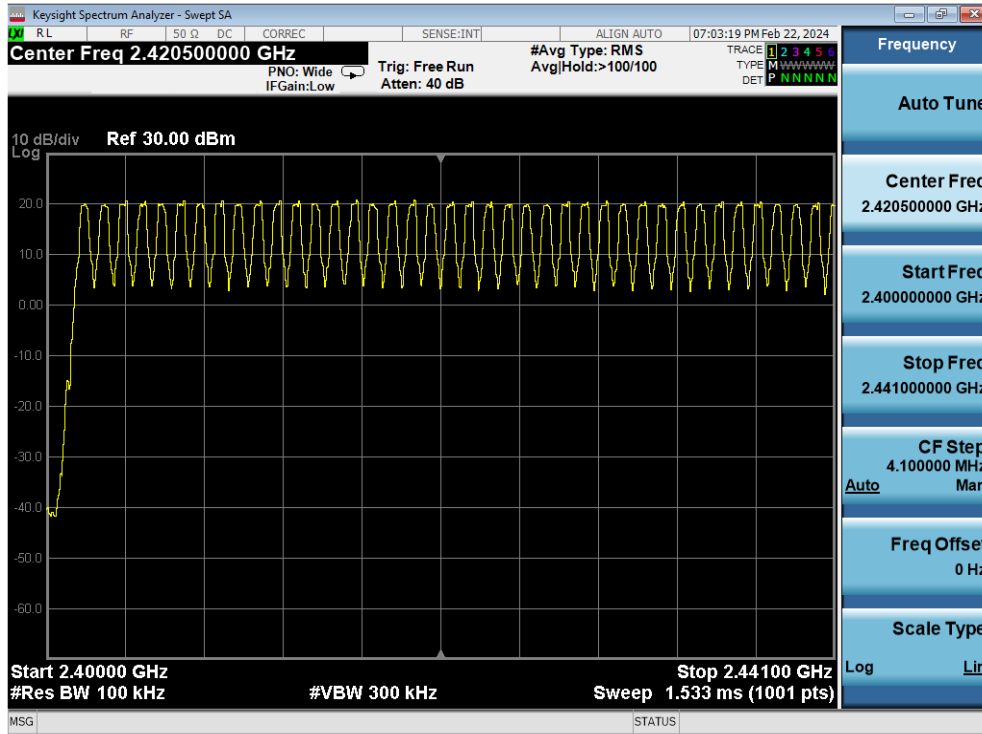


Plot 7-63. Low End Spectrum Channel Hopping Plot Antenna WF9 (Bluetooth, GFSK, ePA)

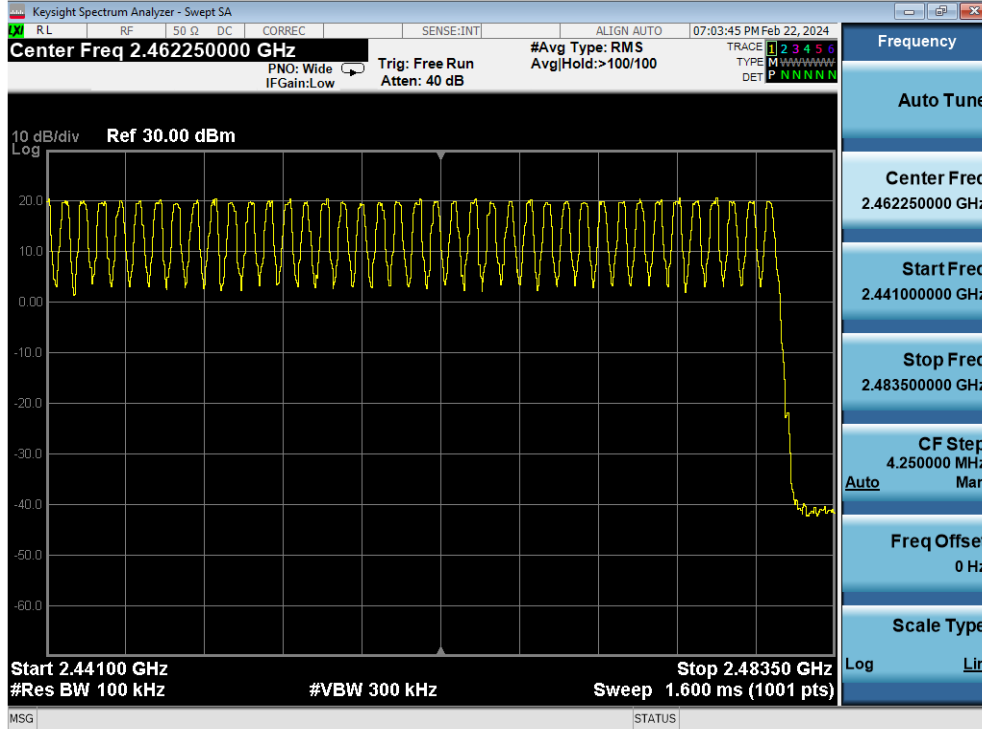


Plot 7-64. High End Spectrum Channel Hopping Plot Antenna WF9 (Bluetooth, GFSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 62 of 118

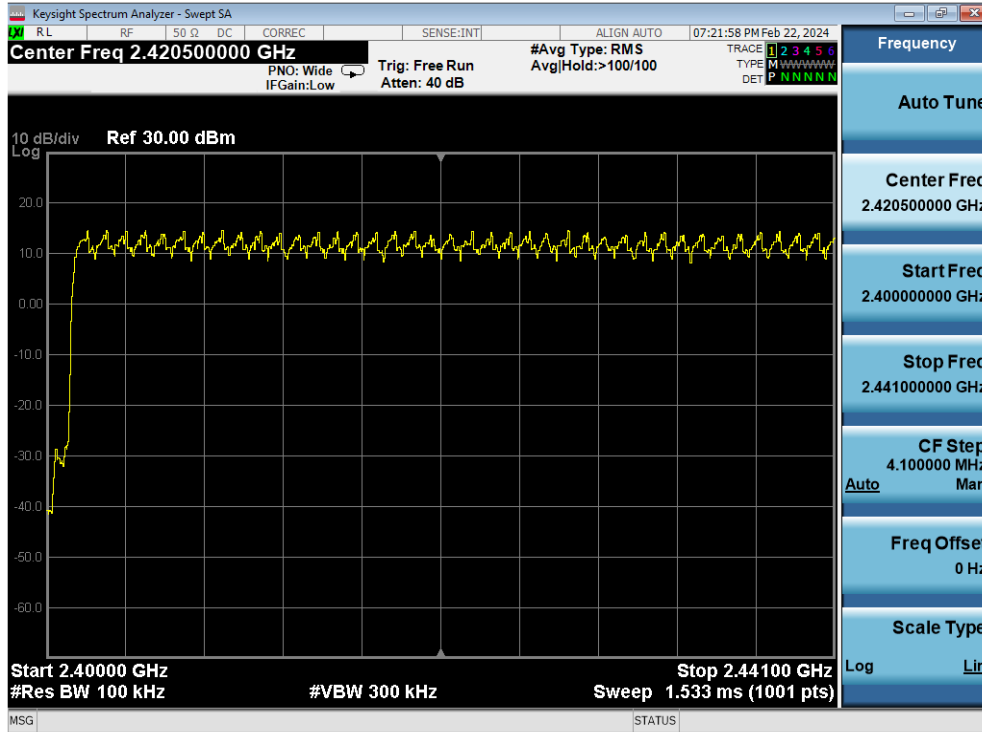

Plot 7-65. Low End Spectrum Channel Hopping Plot Antenna WF9 (Bluetooth, 8DPSK, ePA)

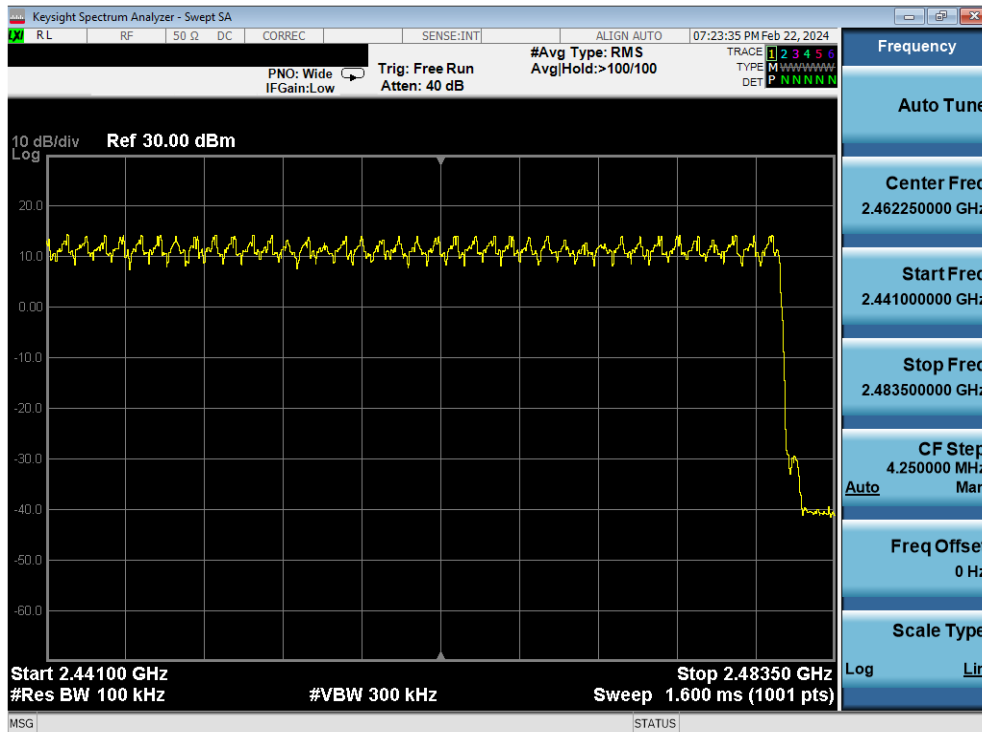

Plot 7-66. High End Spectrum Channel Hopping Plot Antenna WF9 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 63 of 118

7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10th harmonic of the fundamental transmit frequency. **The maximum permissible out-of-band emission level is 20 dBc.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-7. Test Instrument & Measurement Setup


Test Notes

1. Out-of-band conducted spurious emissions were investigated for all data rates and the worst case emissions were found with the EUT transmitting at 1Mbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
2. The unit was tested with all possible mode and power schemes and only the highest emission is reported.


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 64 of 118

V 10.6 09/13/2023

Antenna WF8

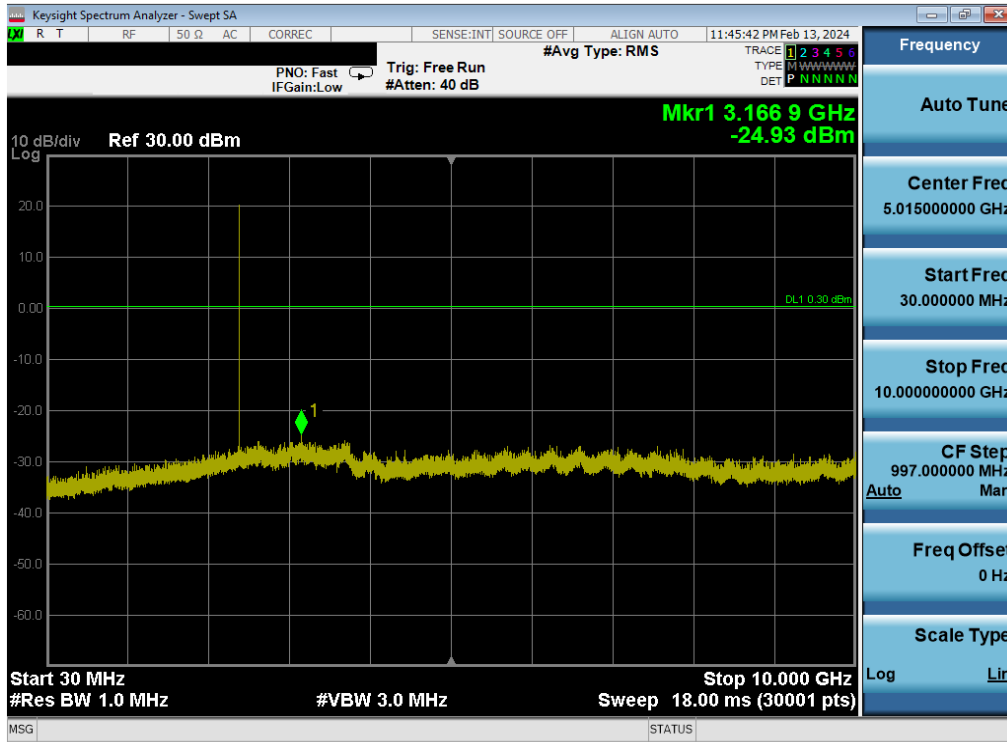


Plot 7-67. Conducted Spurious Plot Antenna WF8 (Bluetooth, GFSK, ePA – Ch. 0)

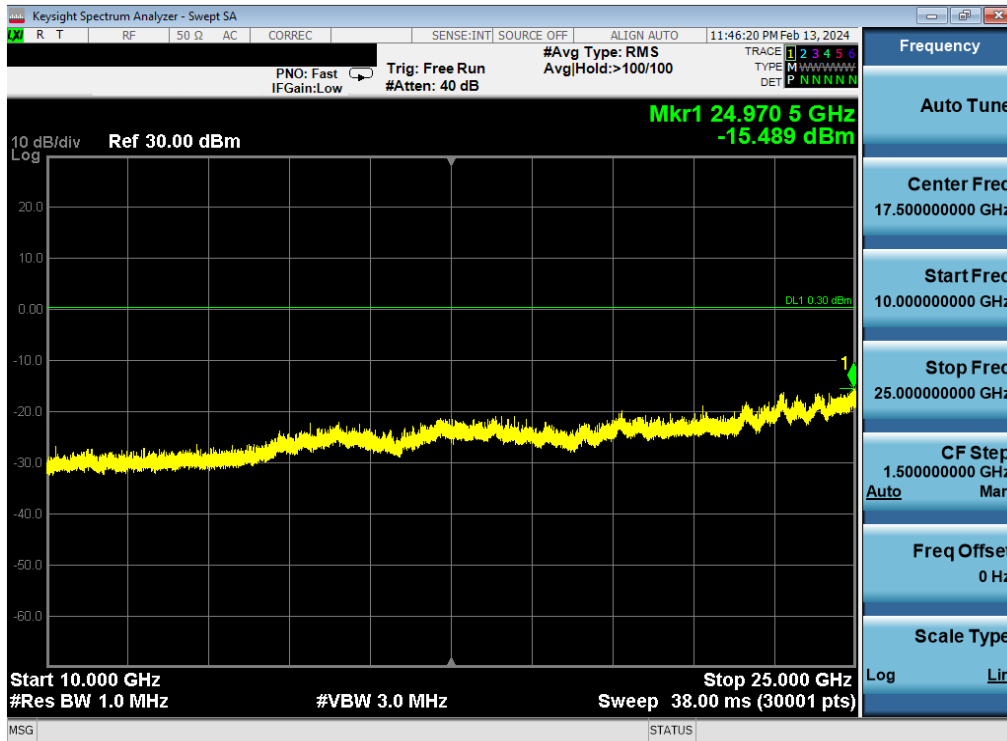


Plot 7-68. Conducted Spurious Plot Antenna WF8 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 65 of 118

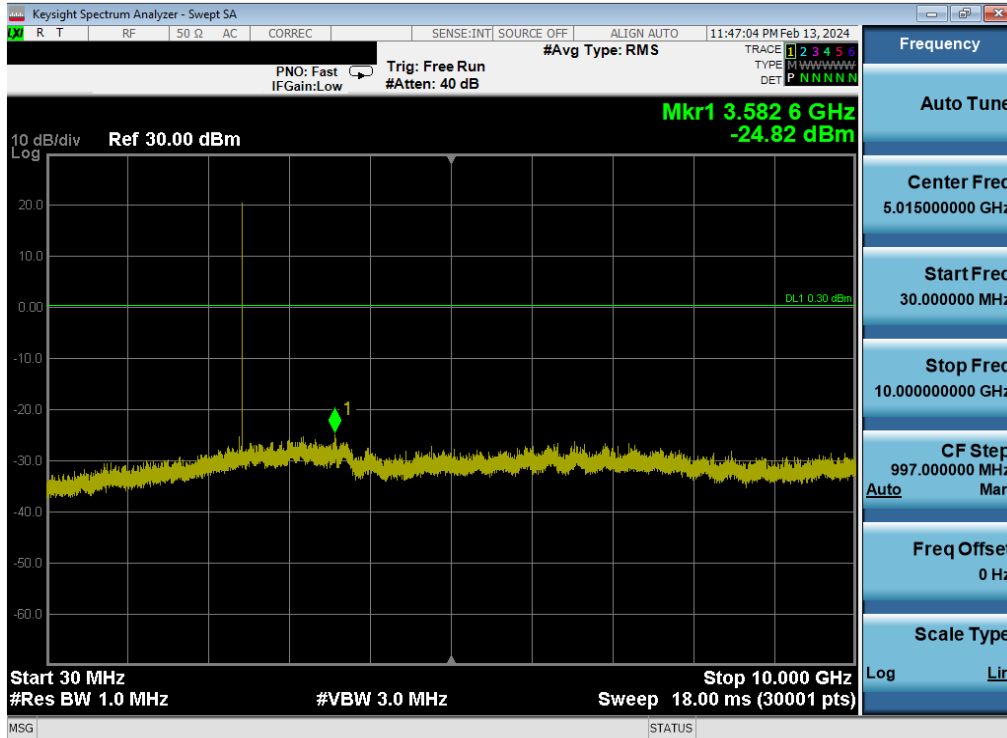


Plot 7-69. Conducted Spurious Plot Antenna WF8 (Bluetooth, GFSK, ePA – Ch. 39)

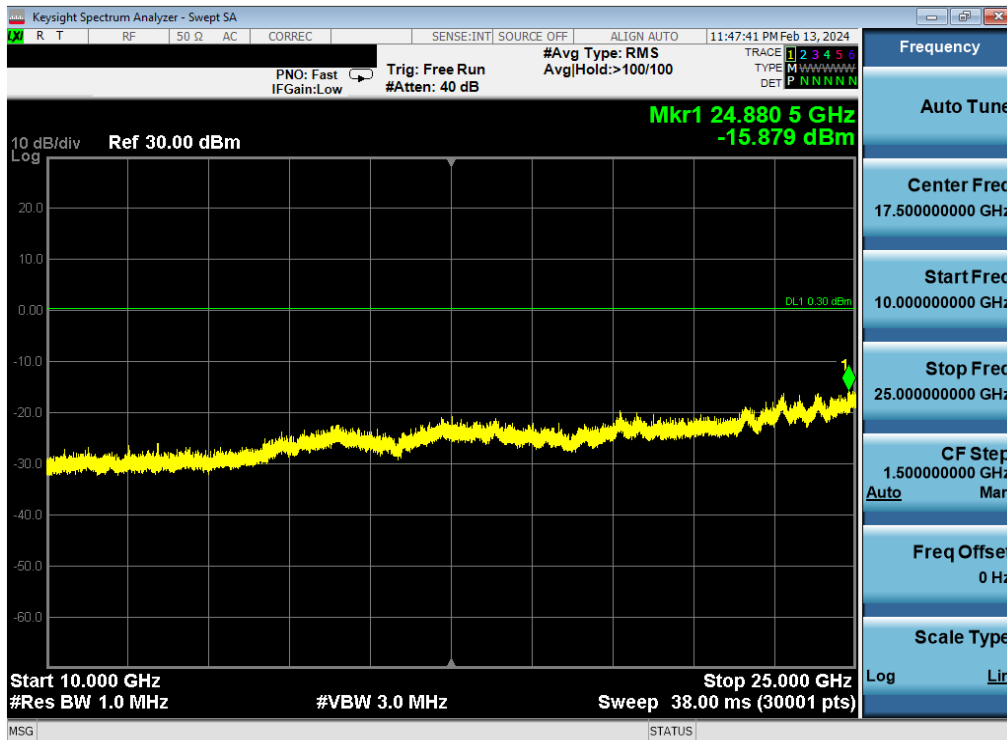


Plot 7-70. Conducted Spurious Plot Antenna WF8 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 66 of 118

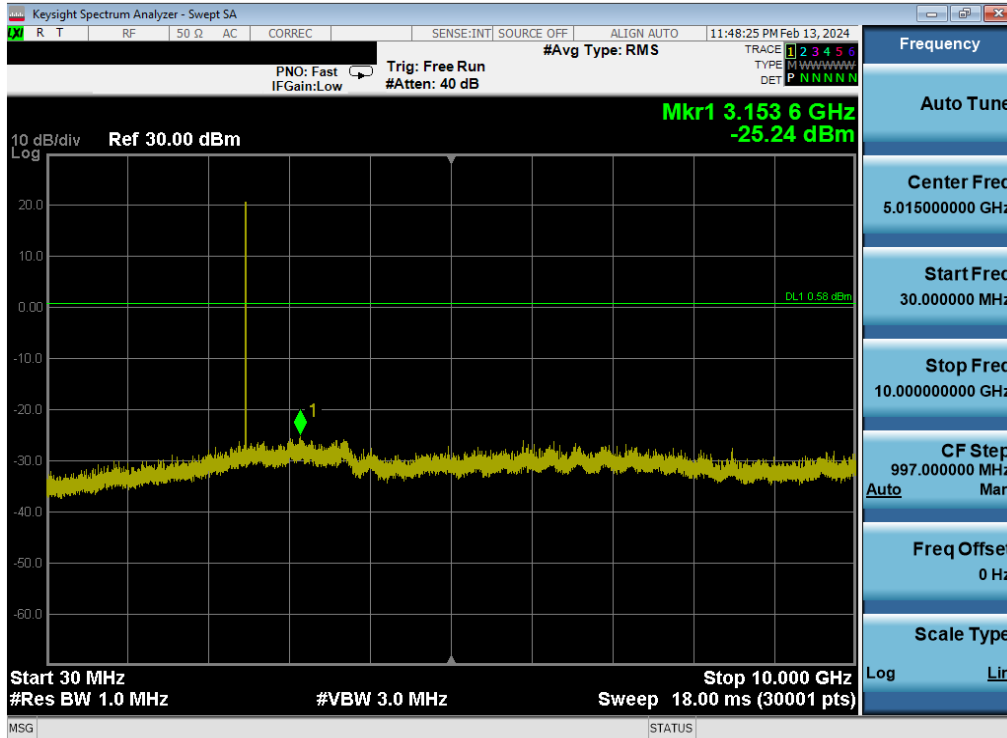


Plot 7-71. Conducted Spurious Plot Antenna WF8 (Bluetooth, GFSK, ePA – Ch. 78)

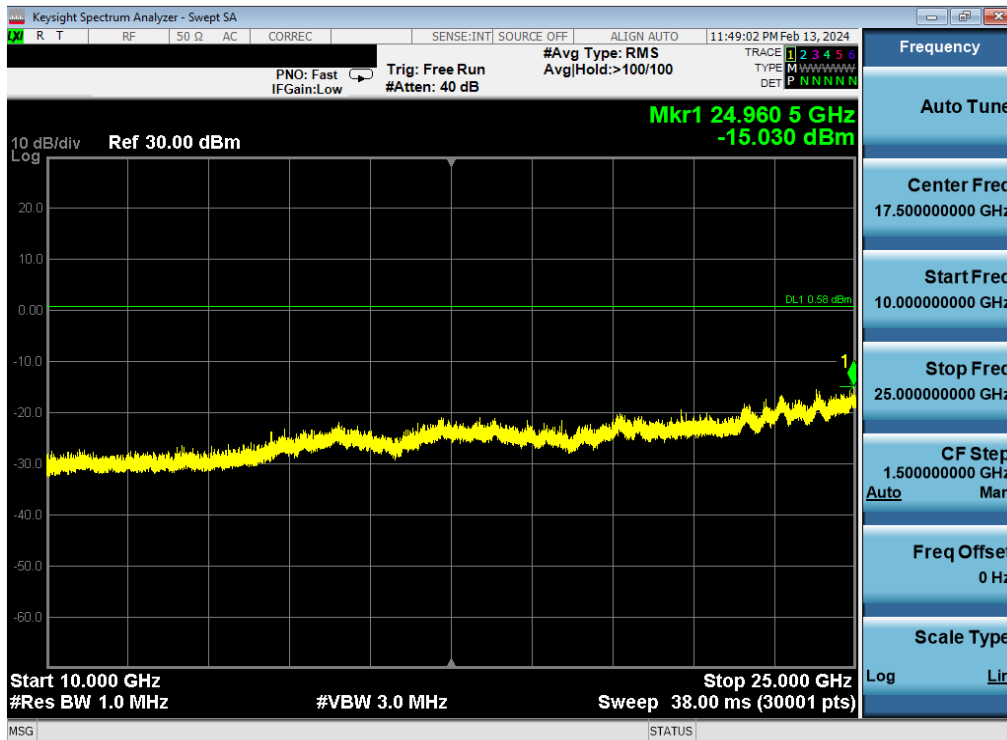


Plot 7-72. Conducted Spurious Plot Antenna WF8 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 67 of 118

Antenna WF7

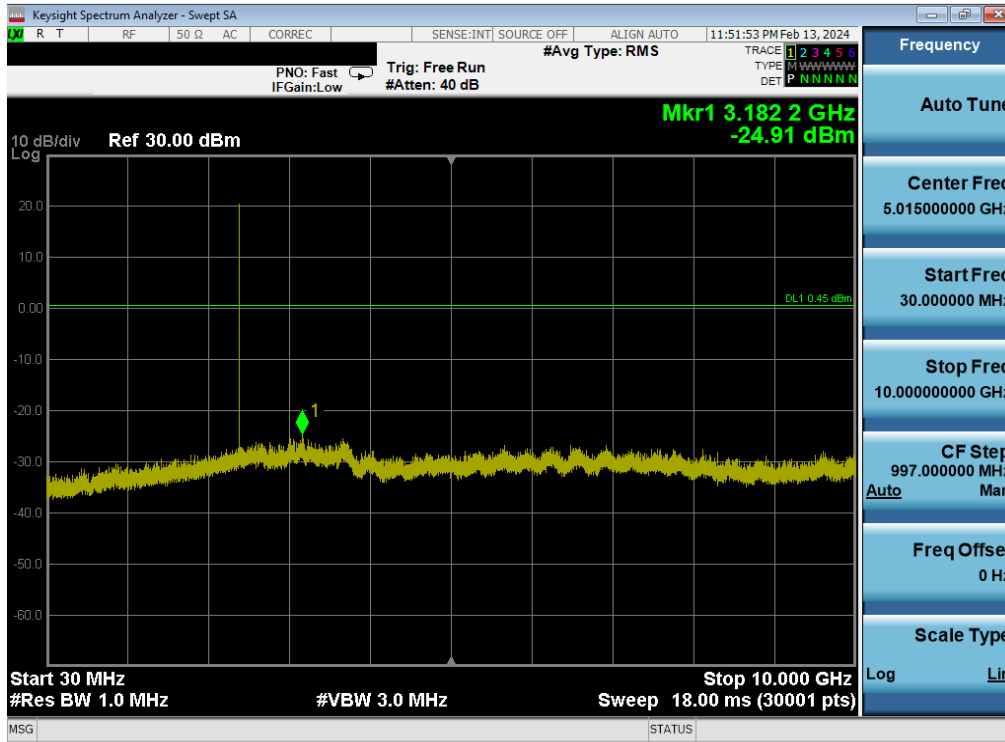


Plot 7-73. Conducted Spurious Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 0)

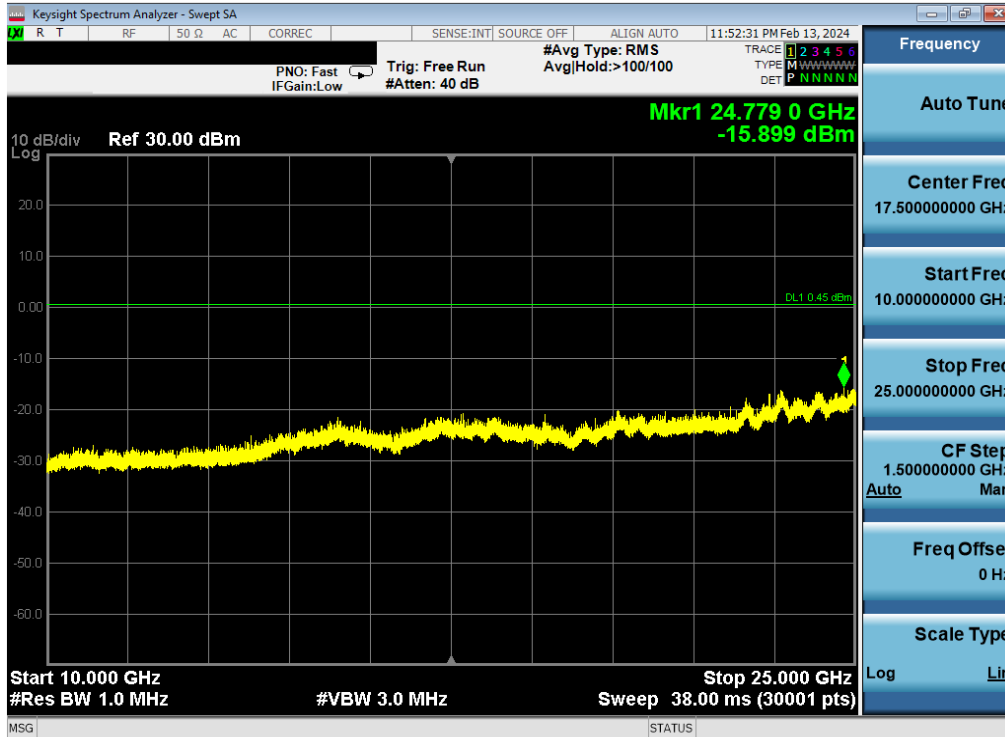


Plot 7-74. Conducted Spurious Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 68 of 118

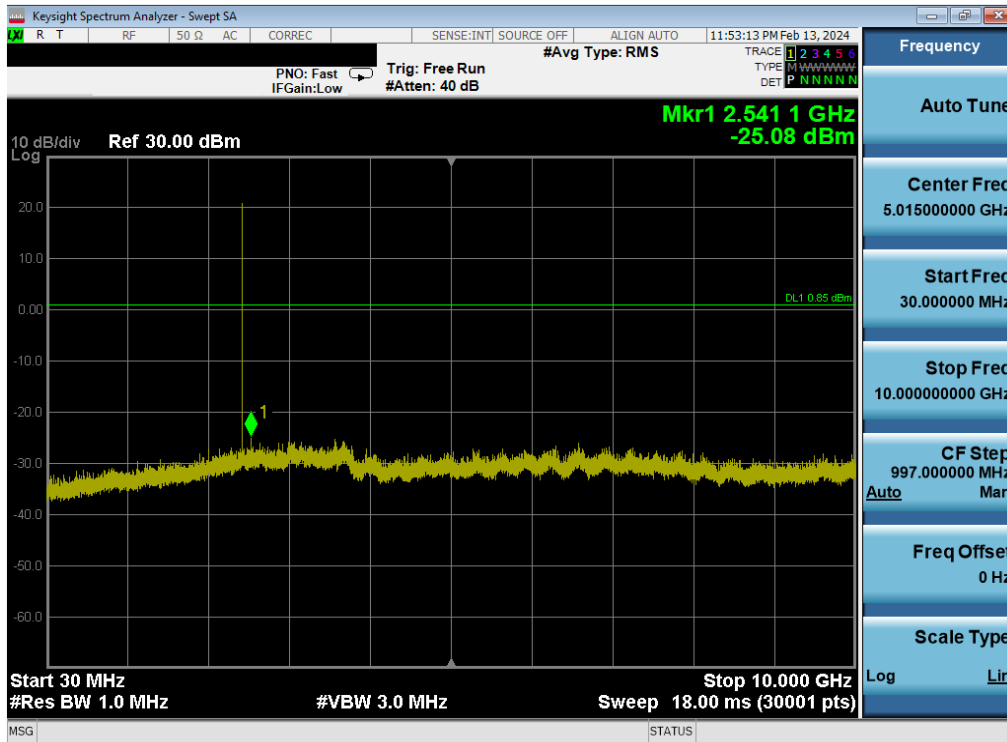


Plot 7-75. Conducted Spurious Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 39)

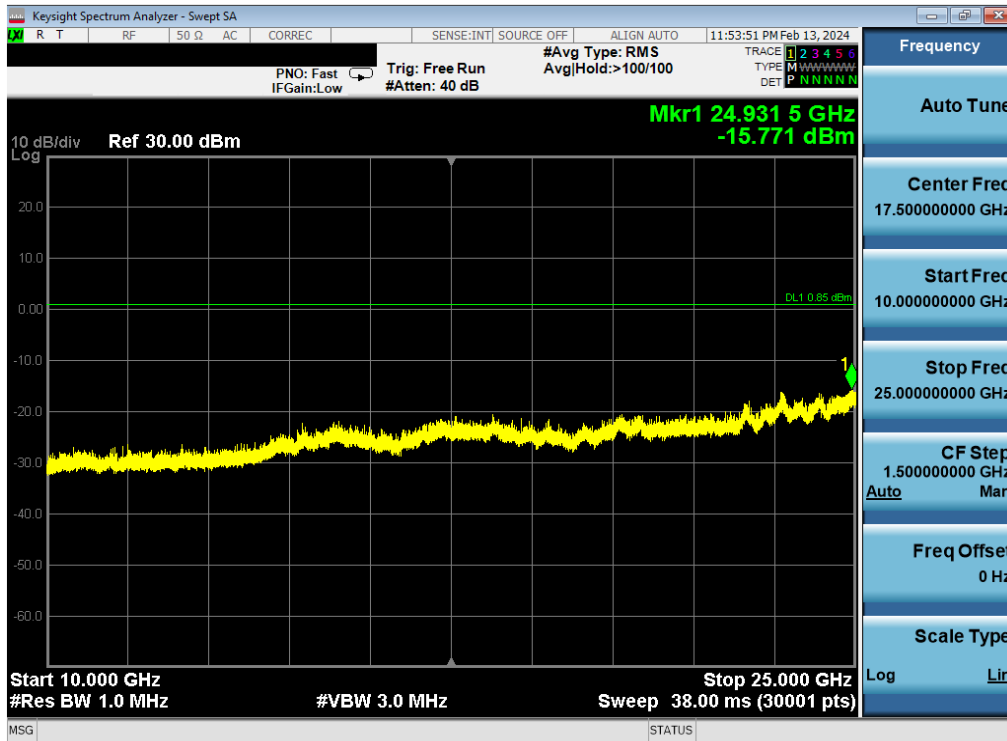


Plot 7-76. Conducted Spurious Plot Antenna WF7 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 69 of 118

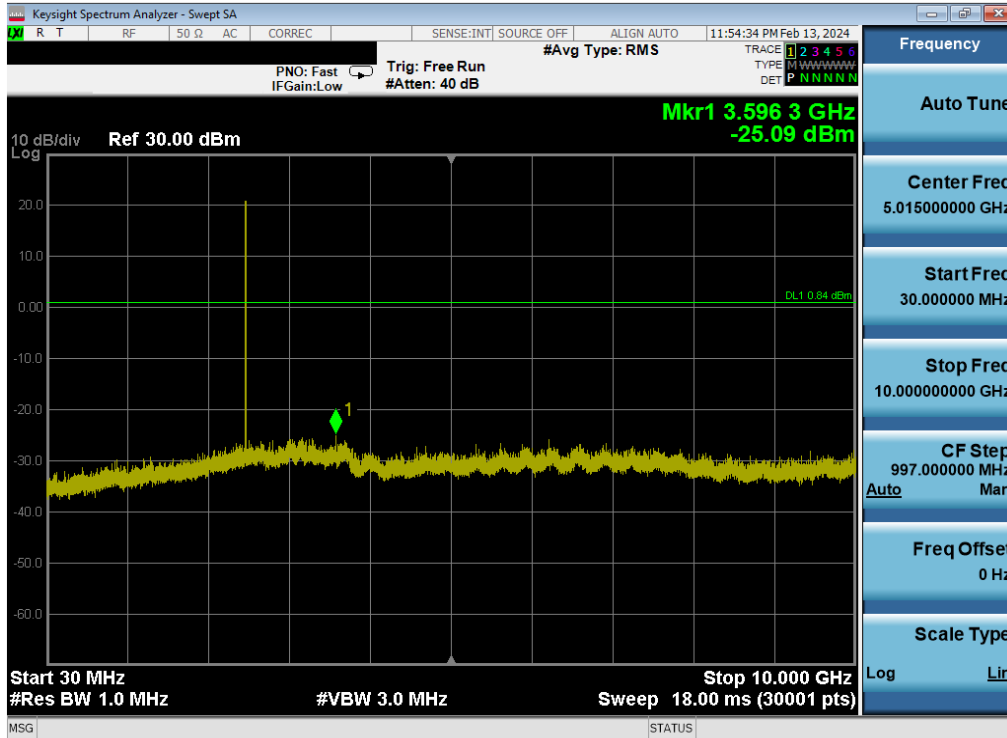


Plot 7-77. Conducted Spurious Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 78)

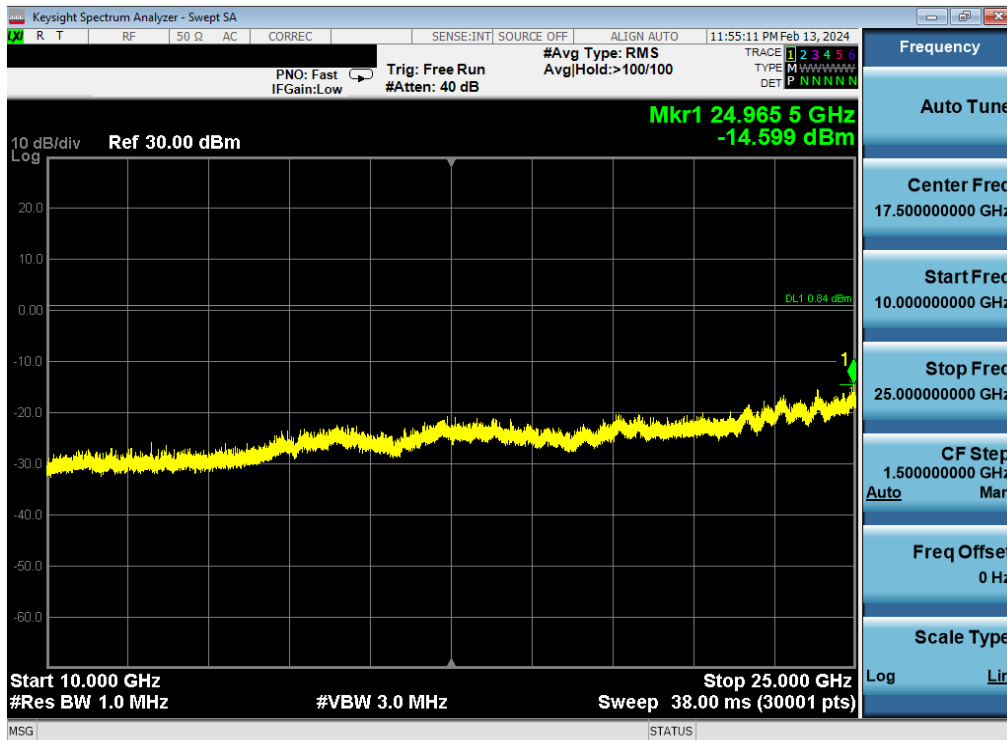


Plot 7-78. Conducted Spurious Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 70 of 118

Antenna WF9

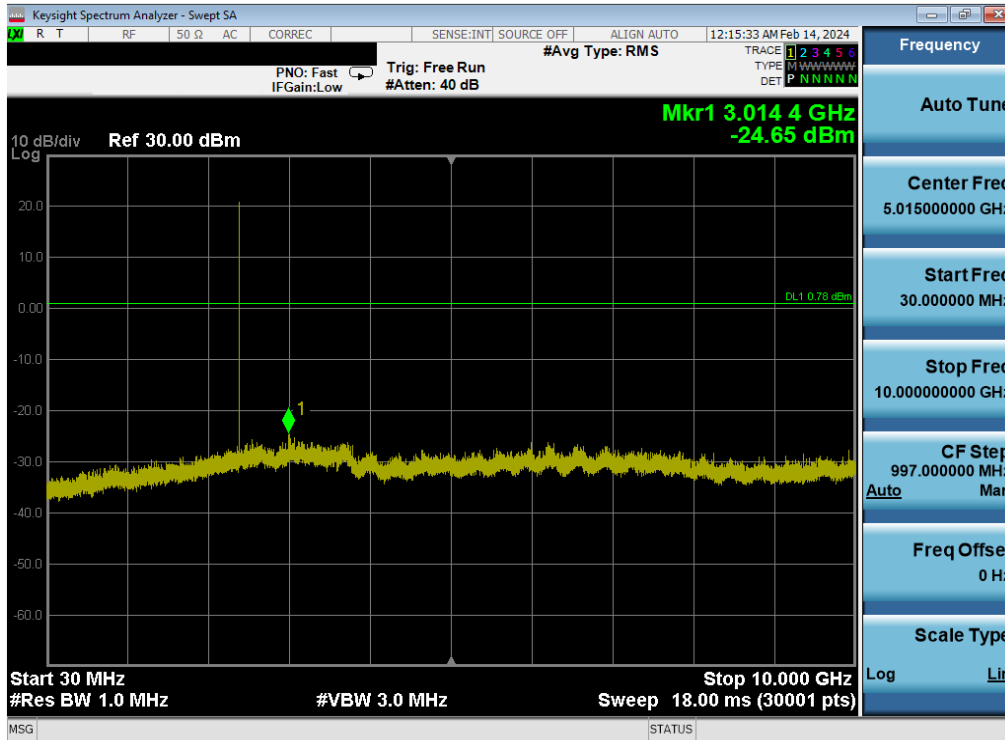


Plot 7-79. Conducted Spurious Plot Antenna WF9 (Bluetooth, GFSK, ePA – Ch. 0)

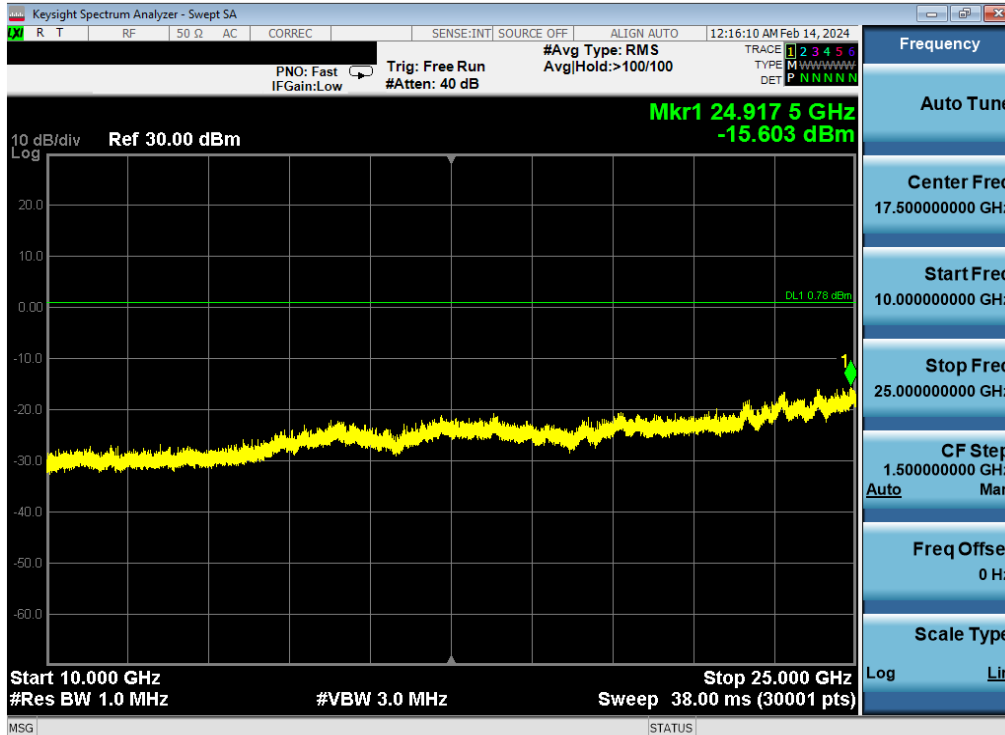


Plot 7-80. Conducted Spurious Plot Antenna WF9 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 71 of 118

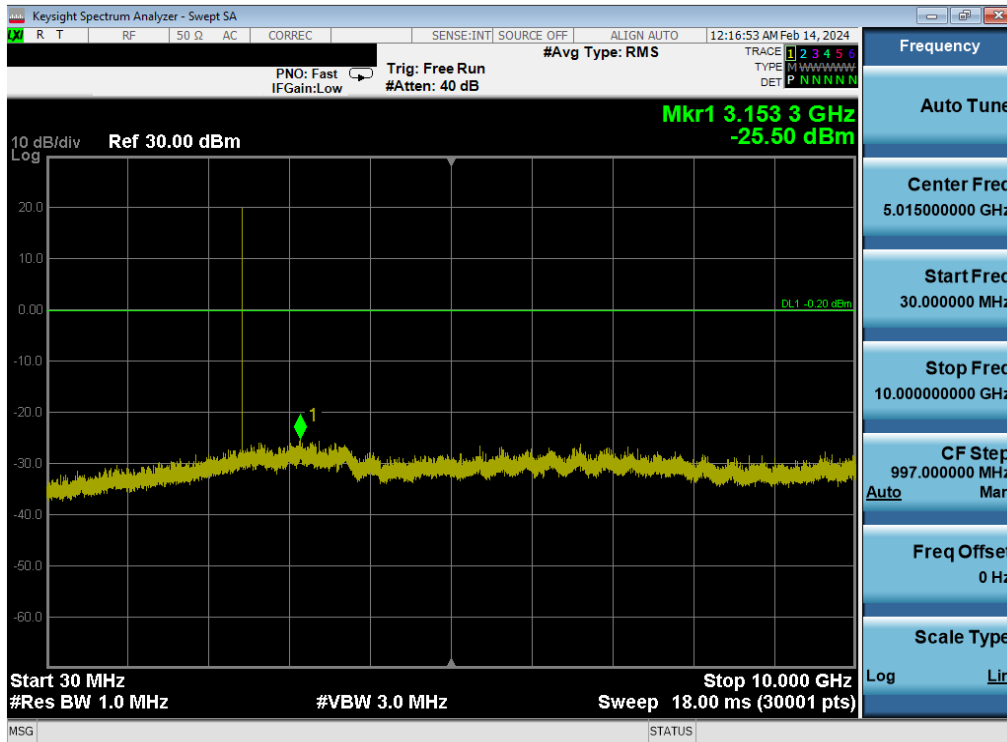


Plot 7-81. Conducted Spurious Plot Antenna WF9 (Bluetooth, GFSK, ePA – Ch. 39)

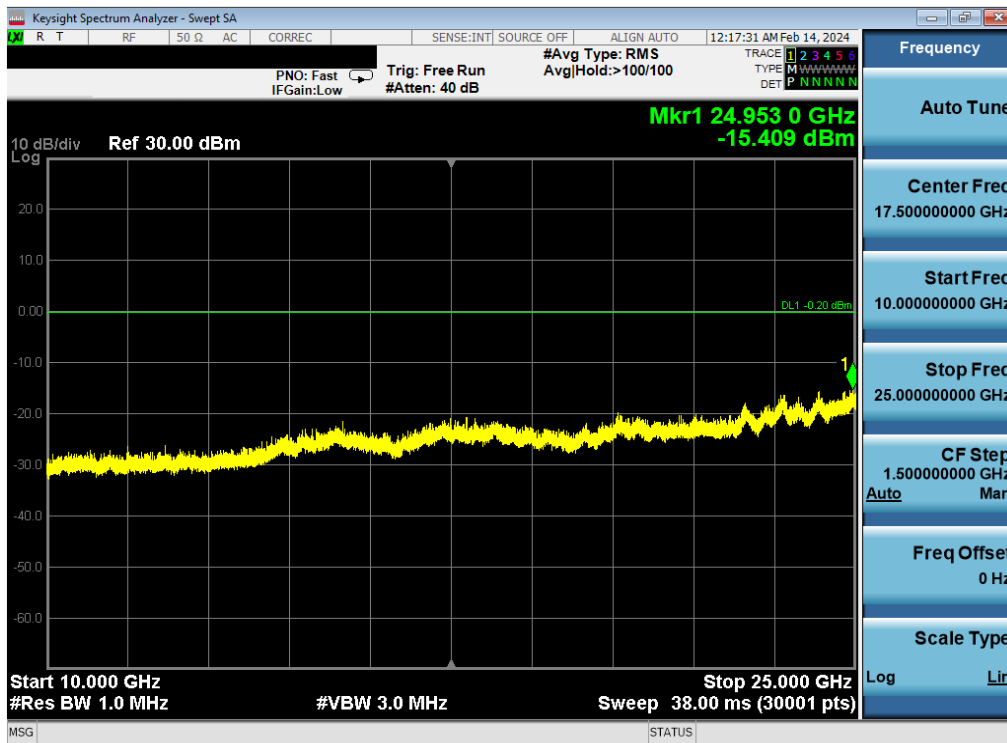


Plot 7-82. Conducted Spurious Plot Antenna WF9 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 72 of 118

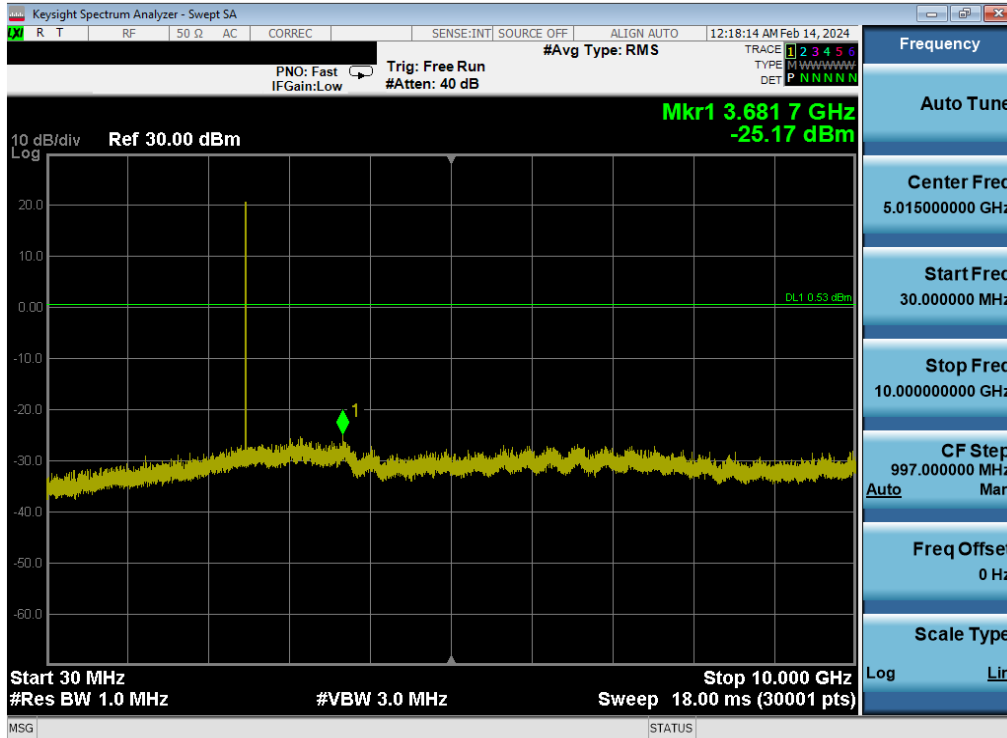

Plot 7-83. Conducted Spurious Plot Antenna WF9 (Bluetooth, GFSK, ePA – Ch. 78)

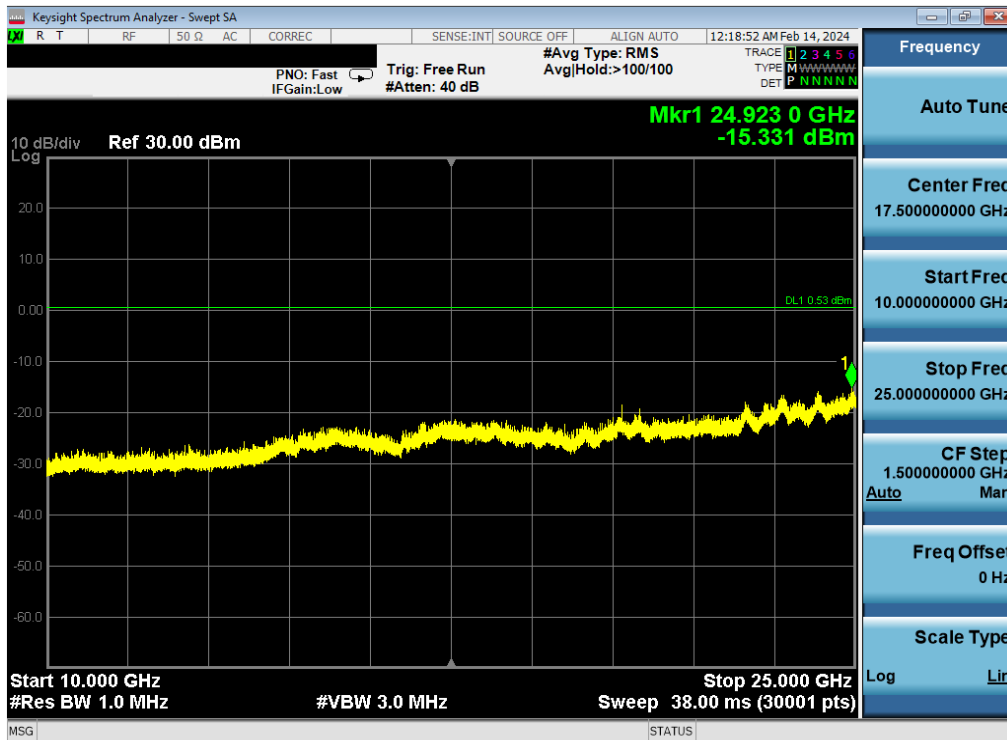


Plot 7-84. Conducted Spurious Plot Antenna WF9 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 73 of 118


Simultaneous Tx

Description	Bluetooth	UNII
Antenna	Antenna WF8	Antenna WF8
Channel	79	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11n

Table 7-16. Worst Case Simultaneous Transmission Configuration

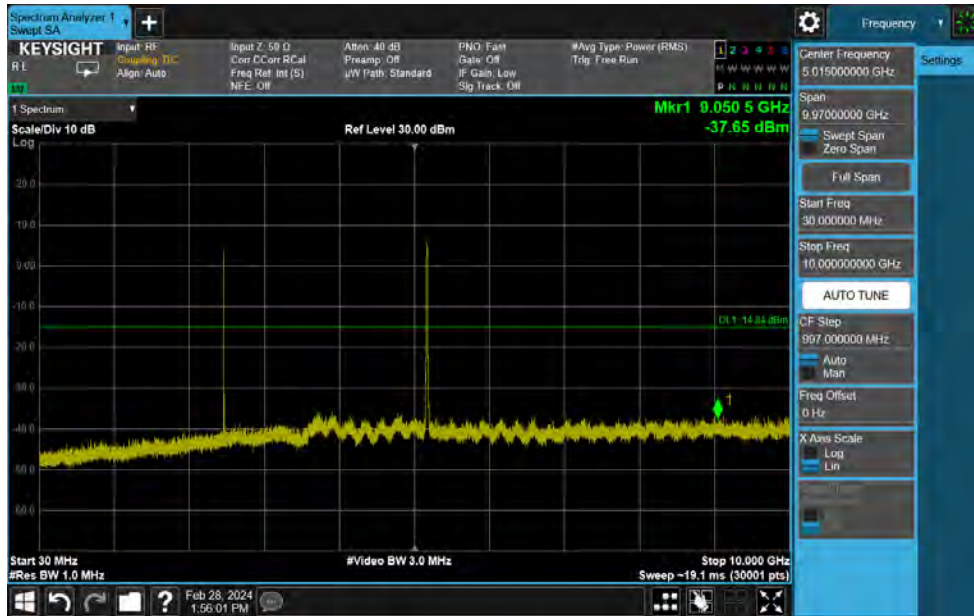

Plot 7-85. Conducted Simultaneous Tx Spurious Plot Antenna WF8 (Bluetooth + UNII)

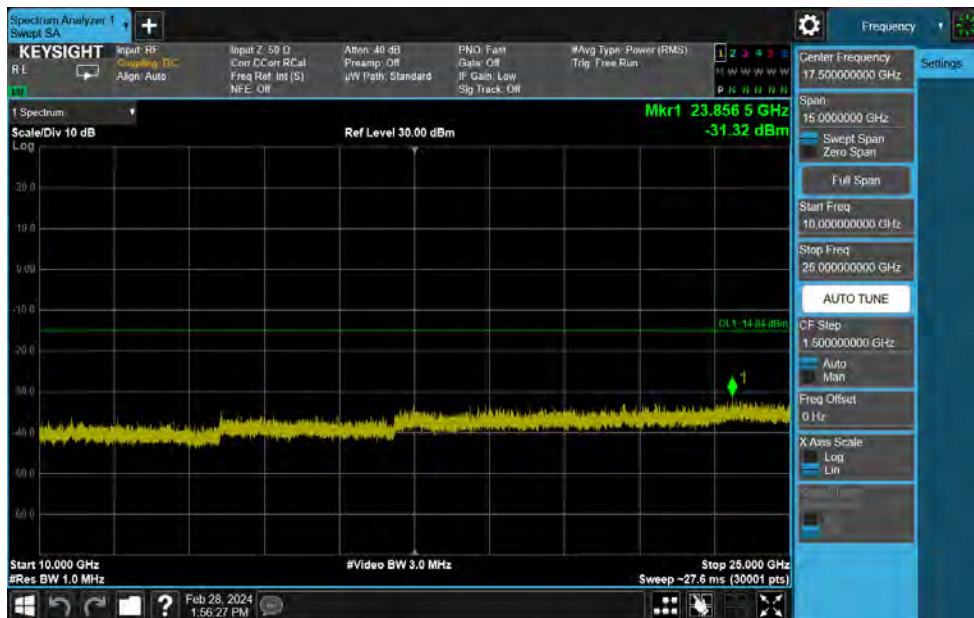

Plot 7-86. Conducted Simultaneous Tx Spurious Plot Antenna WF8 (Bluetooth + UNII)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 74 of 118

7.9 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-17 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-17. Radiated Limits

Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 75 of 118

V 10.6 09/13/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

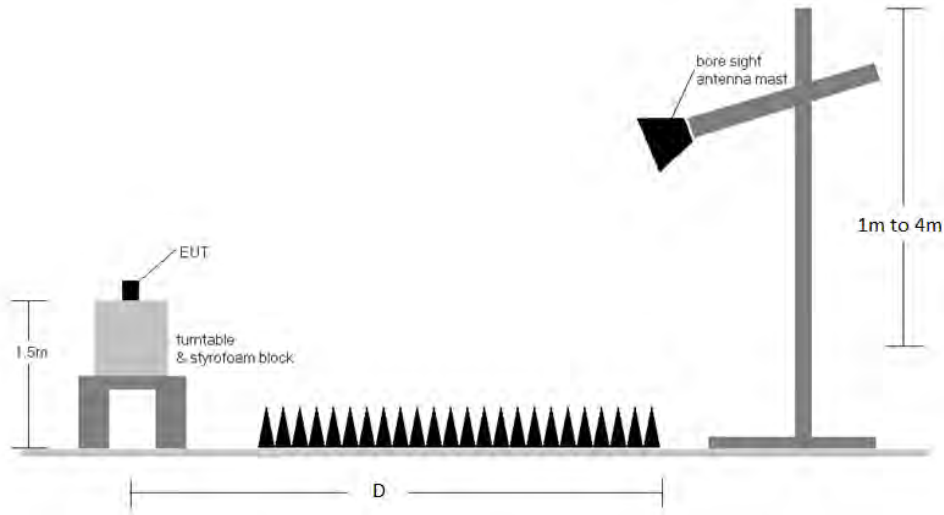


Figure 7-8. Radiated Test Setup >1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-17.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
9. Average emissions were not reported since the duty cycle correction factor was greater than 20dB.

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 76 of 118

Sample Calculation

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Duty Cycle Correction Factor Calculation

- Channel hop rate = 800 hops/second (AFH Mode)
- Adjusted channel hop rate for DH5 mode = 133.33 hops/second
- Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels = $7.50 \times 20 \text{ channels} = 150 \text{ ms}$
- Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
- Worst case dwell time = 7.5 ms

Duty cycle correction factor = $20\log_{10}(7.5\text{ms}/100\text{ms}) = -22.5 \text{ dB}$

Average Emission Calculation

- Average Emission = Measured Peak Emissions $_{[dB\mu V/m]} - \text{Duty Cycle Correction Factor }_{[dB]}$


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.9.6 was calculated using the formula:

$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 77 of 118

7.9.1 Antenna WF8 Radiated Spurious Emission Measurements (1 – 18GHz)
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

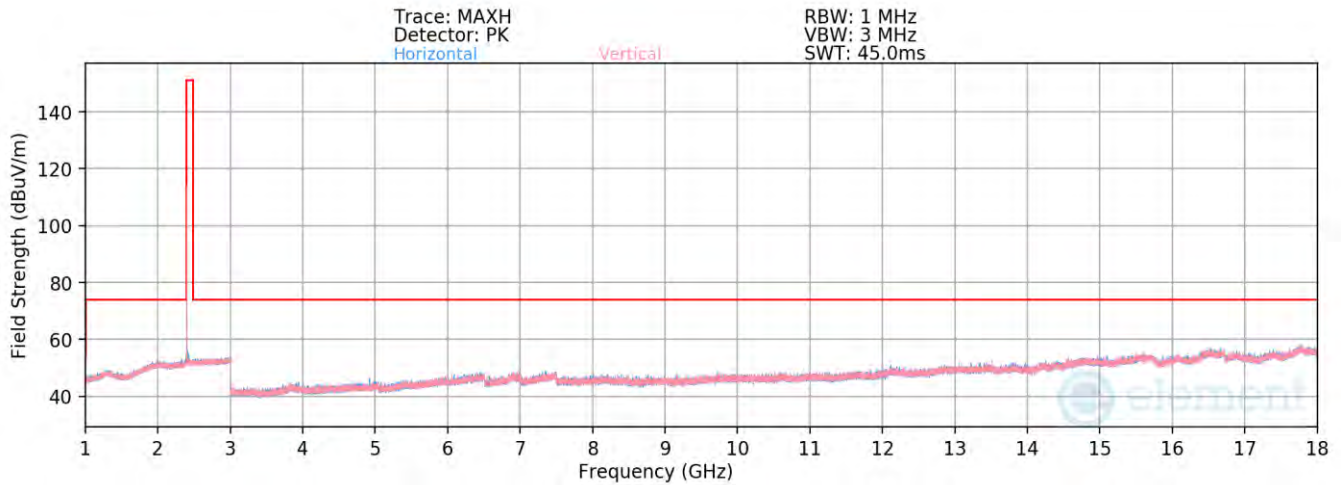


Plot 7-87. Radiated Spurious Emissions above 1GHz Antenna WF8 (BT GFSK ePA – Ch. 0)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Peak	-	-	-	-65.25	3.44	45.19	73.98	-28.79
12010.00	Peak	-	-	-	-67.59	10.65	50.06	73.98	-23.92

Table 7-18. Radiated Measurements Antenna WF8

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 78 of 118

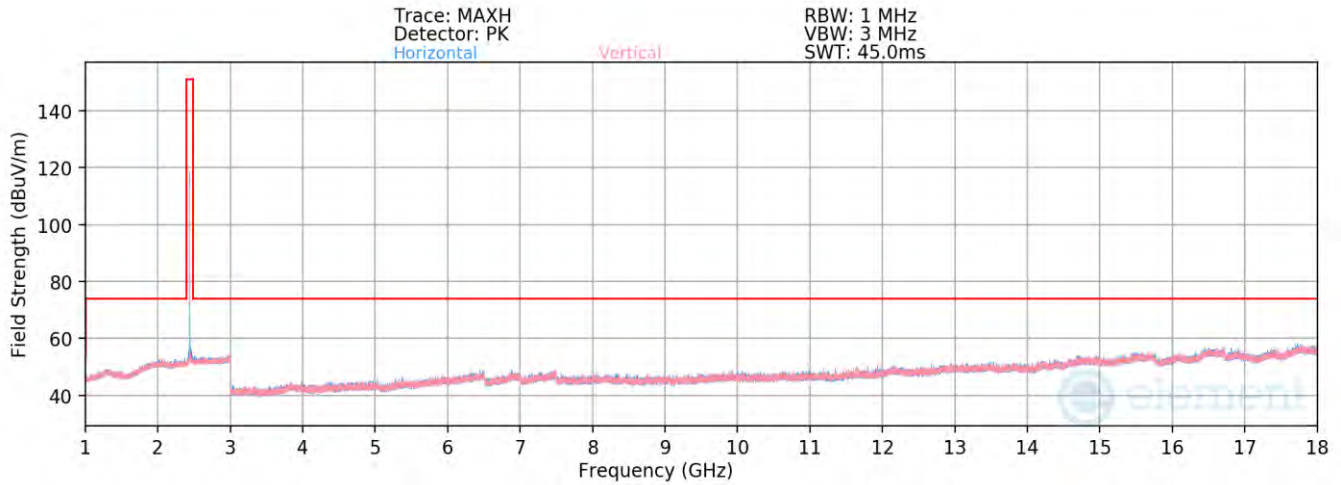


Plot 7-88. Radiated Spurious Emissions above 1GHz Antenna WF8 (BT GFSK ePA – Ch. 39)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Peak	-	-	-	-65.16	3.32	45.16	73.98	-28.82
7323.00	Peak	-	-	-	-65.80	7.37	48.57	73.98	-25.41
12205.00	Peak	-	-	-	-67.79	10.61	49.82	73.98	-24.16

Table 7-19. Radiated Measurements Antenna WF8

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 79 of 118

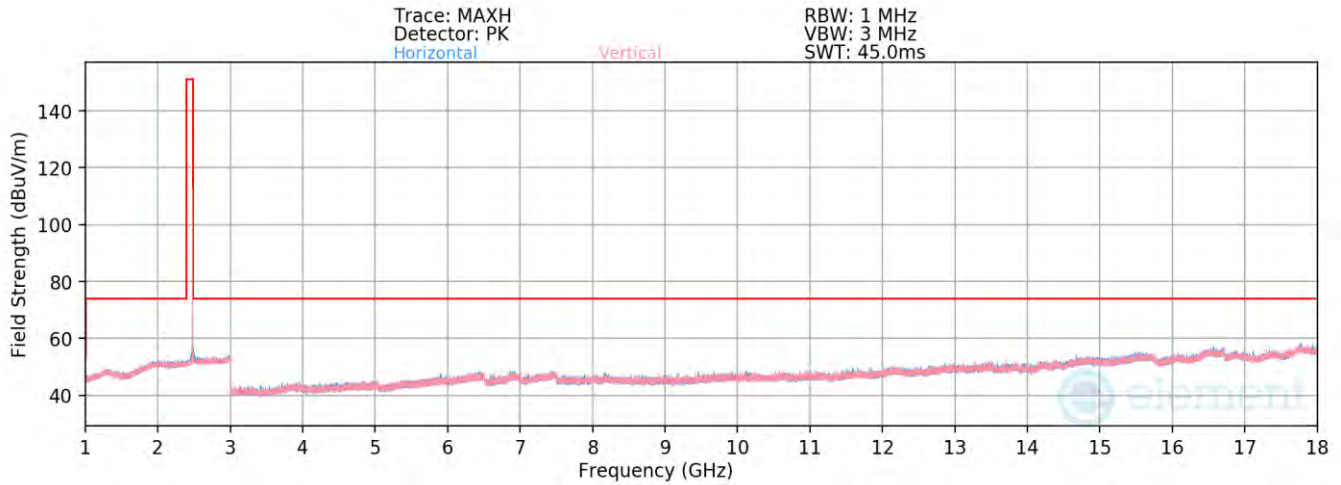

Plot 7-89. Radiated Spurious Emissions above 1GHz Antenna WF8 (BT GFSK ePA – Ch. 78)


Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	-	-	-	-64.87	3.72	45.85	73.98	-28.13
7440.00	Peak	-	-	-	-65.85	7.51	48.66	73.98	-25.32
12400.00	Peak	-	-	-	-67.92	11.08	50.16	73.98	-23.82

Table 7-20. Radiated Measurements Antenna WF8

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 80 of 118

7.9.2 Antenna WF7 Radiated Spurious Emission Measurements (1 – 18GHz)
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

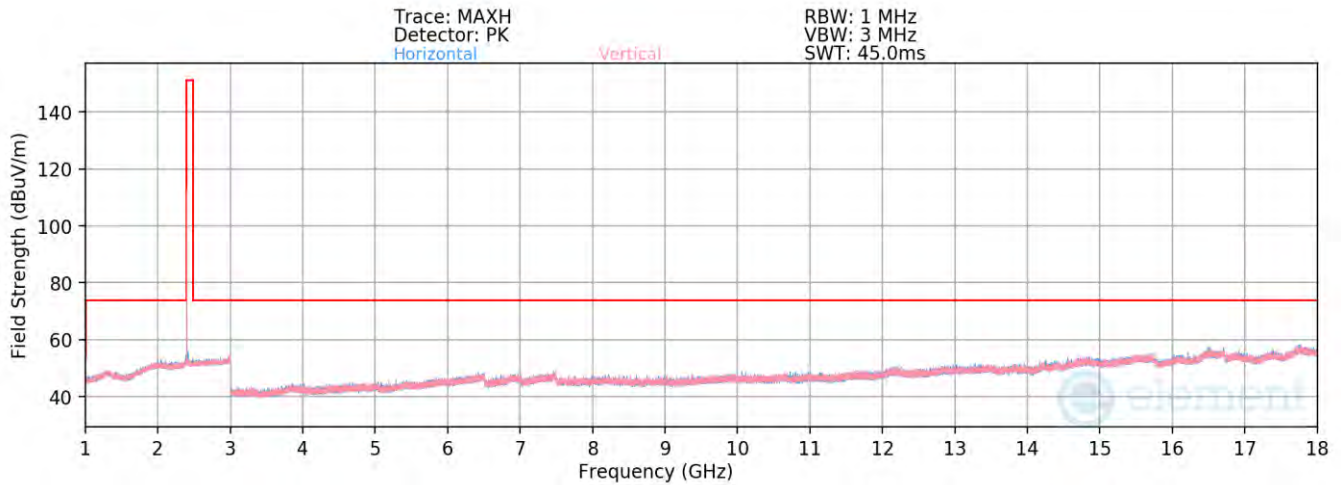


Plot 7-90. Radiated Spurious Emissions above 1GHz Antenna WF7 (BT GFSK ePA – Ch. 0)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Peak	-	-	-	-65.57	3.44	44.87	73.98	-29.11
12010.00	Peak	-	-	-	-67.68	10.65	49.97	73.98	-24.01

Table 7-21. Radiated Measurements Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 81 of 118

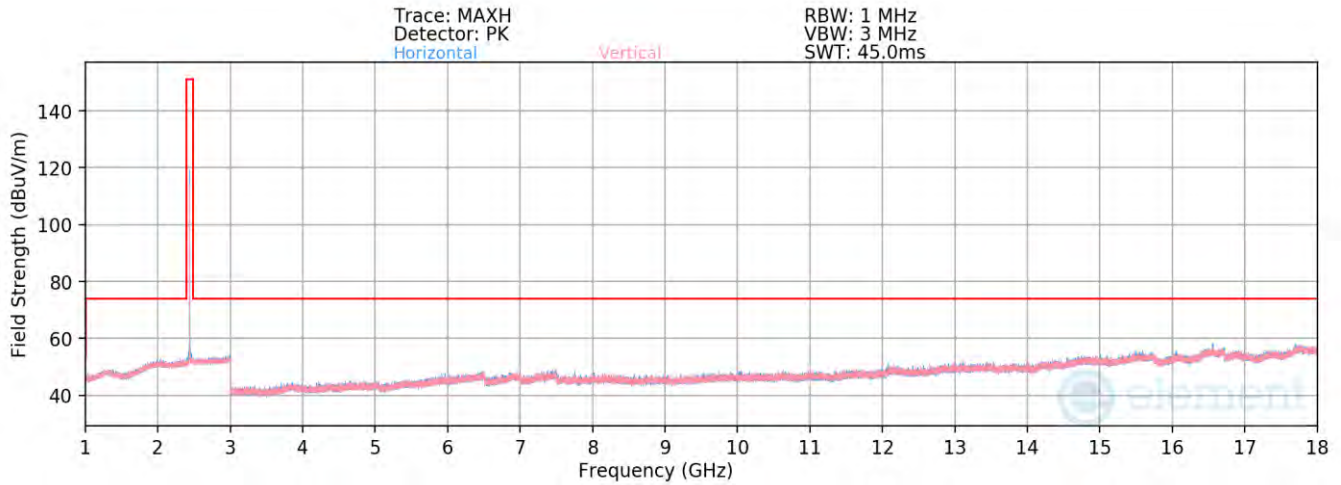


Plot 7-91. Radiated Spurious Emissions above 1GHz Antenna WF7 (BT GFSK ePA – Ch. 39)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Peak	-	-	-	-65.23	3.32	45.09	73.98	-28.89
7323.00	Peak	-	-	-	-77.51	7.37	36.86	73.98	-37.12
12205.00	Peak	-	-	-	-68.72	10.61	48.89	73.98	-25.09

Table 7-22. Radiated Measurements Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 82 of 118

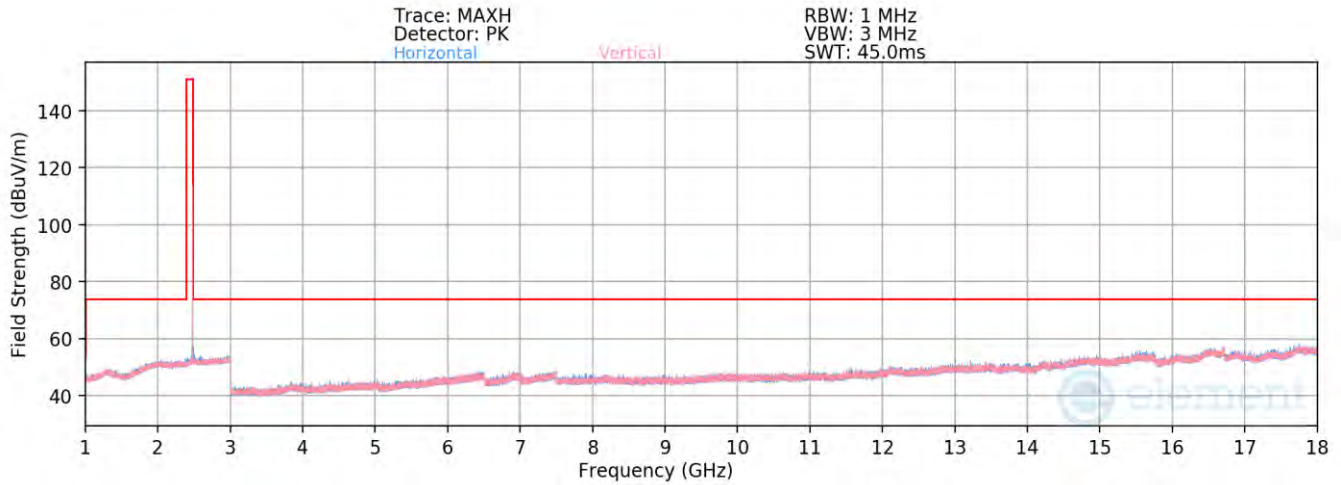

Plot 7-92. Radiated Spurious Emissions above 1GHz Antenna WF7 (BT GFSK ePA – Ch. 78)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	-	-	-	-64.75	3.72	45.97	73.98	-28.01
7440.00	Peak	-	-	-	-65.92	7.51	48.59	73.98	-25.39
12400.00	Peak	-	-	-	-67.95	11.08	50.13	73.98	-23.85

Table 7-23. Radiated Measurements Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 83 of 118

7.9.3 Antenna WF9 Radiated Spurious Emission Measurements (1 – 18GHz)

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

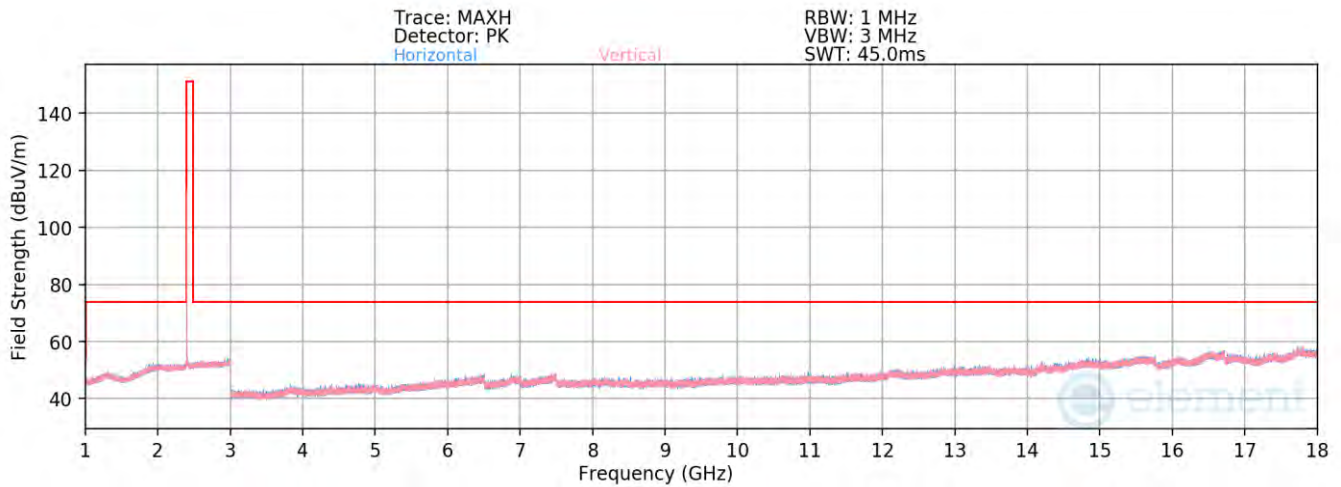

Plot 7-93. Radiated Spurious Emissions above 1GHz Antenna WF9 (BT GFSK ePA – Ch. 0)


Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Peak	-	-	-	-64.94	3.44	45.50	73.98	-28.48
12010.00	Peak	-	-	-	-68.07	10.65	49.58	73.98	-24.40

Table 7-24. Radiated Measurements Antenna WF9

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 84 of 118

V 10.6 09/13/2023

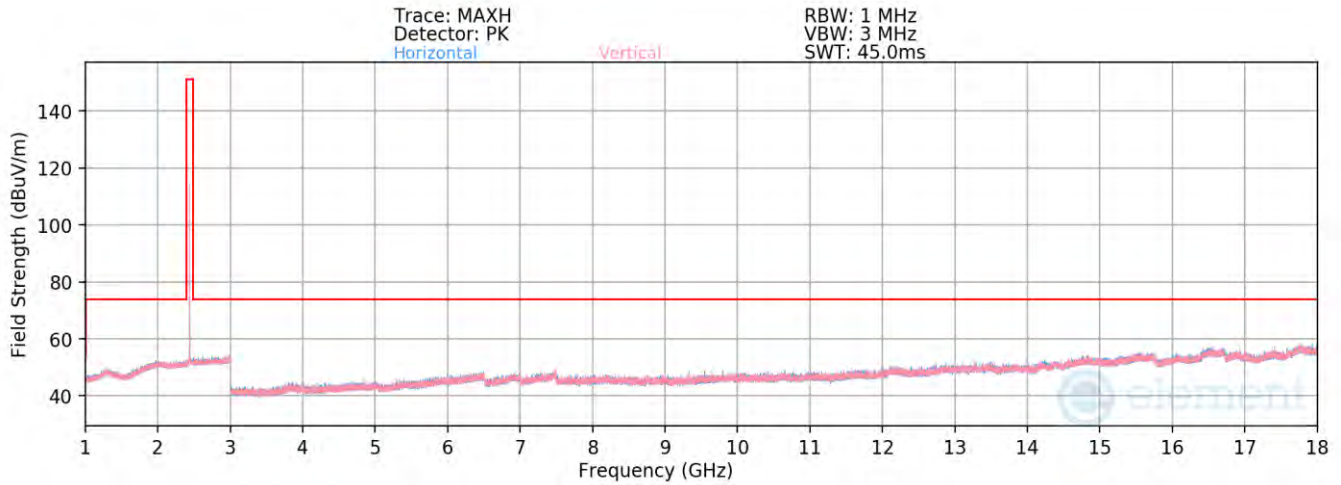


Plot 7-94. Radiated Spurious Emissions above 1GHz Antenna WF9 (BT GFSK ePA – Ch. 39)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Peak	-	-	-	-65.40	3.32	44.92	73.98	-29.06
7323.00	Peak	-	-	-	-65.82	7.37	48.55	73.98	-25.43
12205.00	Peak	-	-	-	-67.21	10.61	50.40	73.98	-23.58

Table 7-25. Radiated Measurements Antenna WF9

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 85 of 118

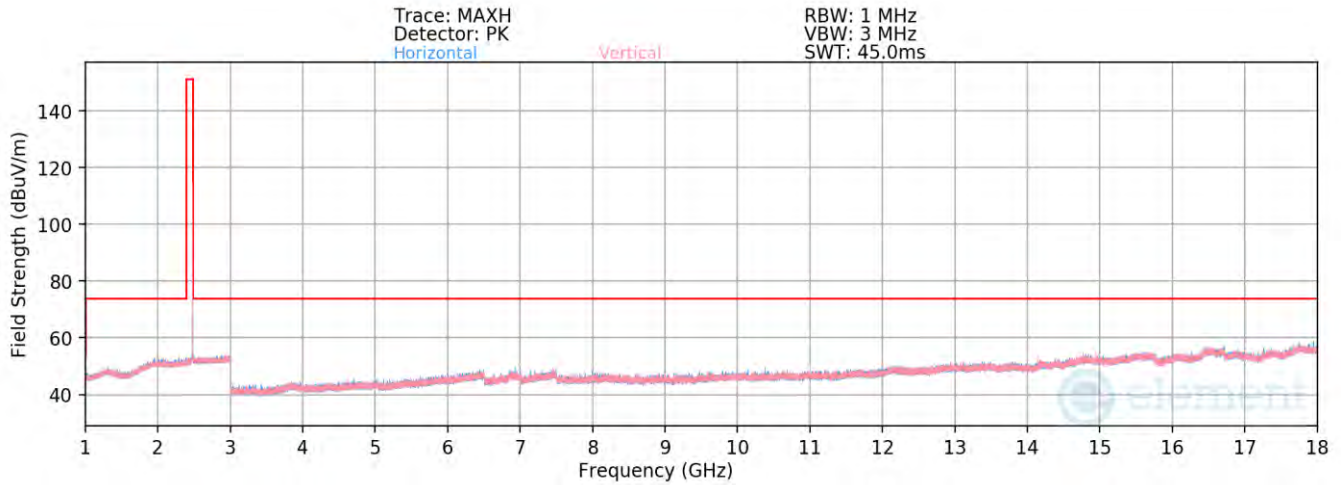

Plot 7-95. Radiated Spurious Emissions above 1GHz Antenna WF9 (BT GFSK ePA – Ch. 78)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	-	-	-	-65.78	3.72	44.94	73.98	-29.04
7440.00	Peak	-	-	-	-65.50	7.51	49.01	73.98	-24.97
12400.00	Peak	-	-	-	-68.05	11.08	50.03	73.98	-23.95

Table 7-26. Radiated Measurements Antenna WF9

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 86 of 118

7.9.4 TxBF Radiated Spurious Emission Measurements (1 – 18GHz)

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

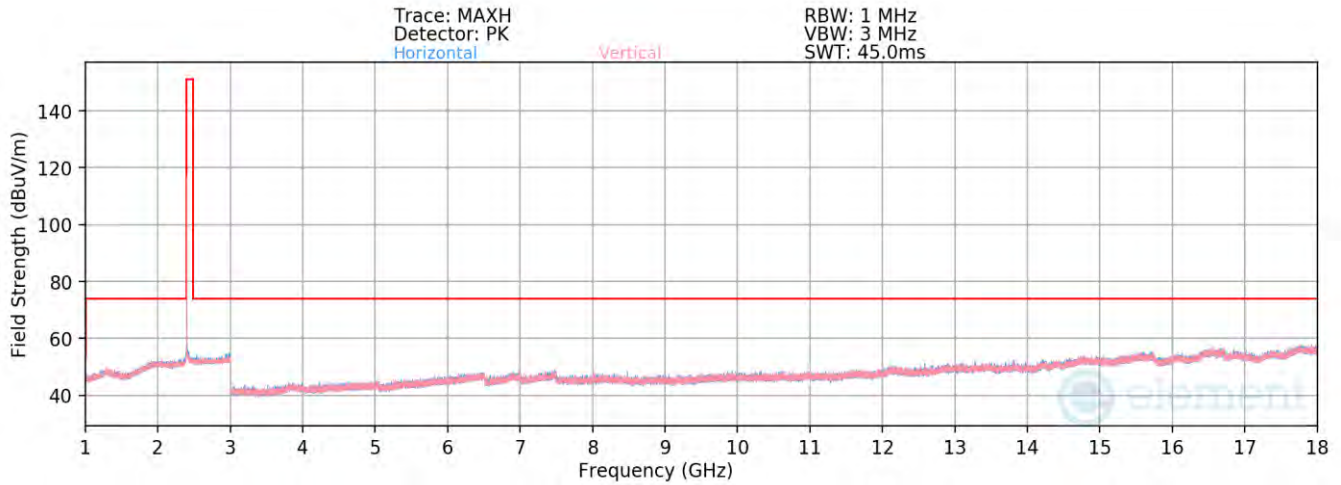


Plot 7-96. Radiated Spurious Emissions above 1GHz TxBF (BT GFSK ePA – Ch. 0)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Peak	-	-	-	-65.45	3.44	44.99	73.98	-28.99
12010.00	Peak	-	-	-	-68.50	10.65	49.15	73.98	-24.83

Table 7-27. Radiated Measurements TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 87 of 118

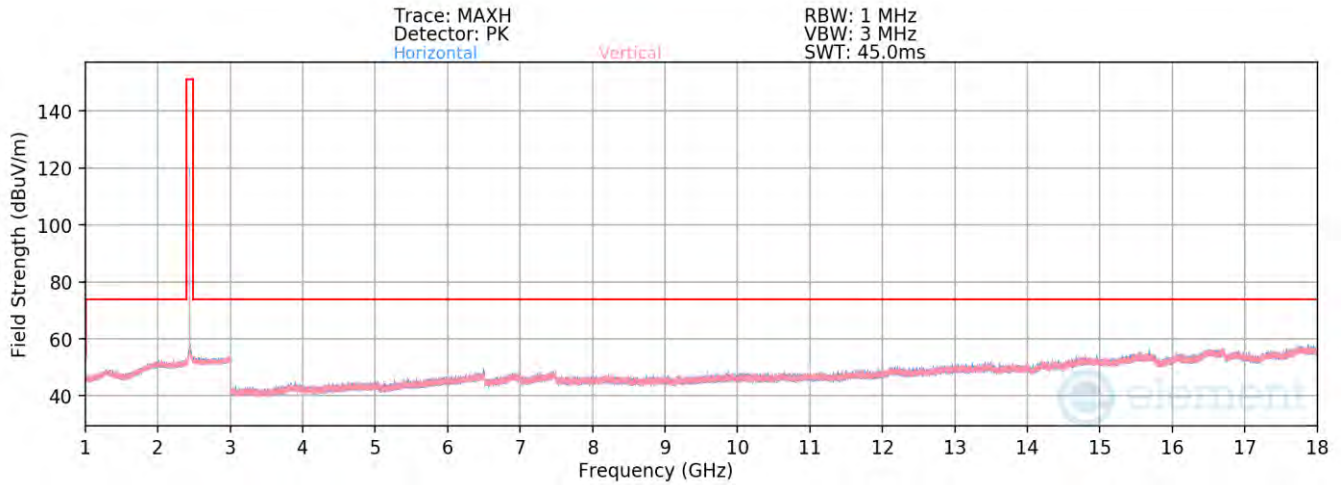

Plot 7-97. Radiated Spurious Emissions above 1GHz TxBF (BT GFSK ePA – Ch. 39)

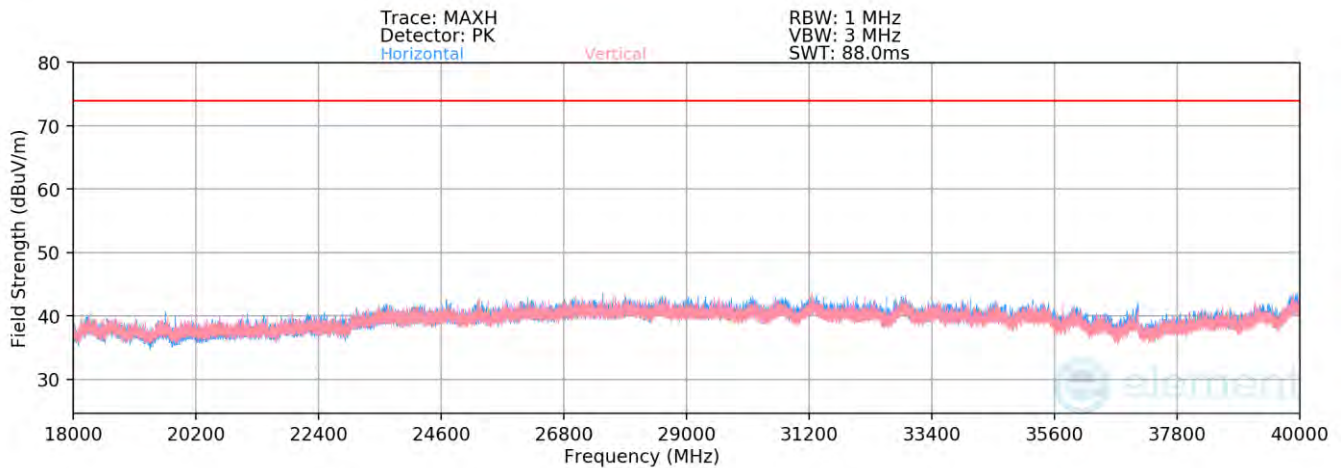

Plot 7-98. Radiated Spurious Emissions above 18GHz TxBF (BT GFSK ePA – Ch. 39)

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG		Test Dates: 11/28/2023 - 2/22/2024



Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 39


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Peak	-	-	-	-64.99	3.32	45.33	73.98	-28.65
7323.00	Peak	-	-	-	-65.85	7.37	48.52	73.98	-25.46
12205.00	Peak	-	-	-	-67.54	10.61	50.07	73.98	-23.91

Table 7-28. Radiated Measurements TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 89 of 118

V 10.6 09/13/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

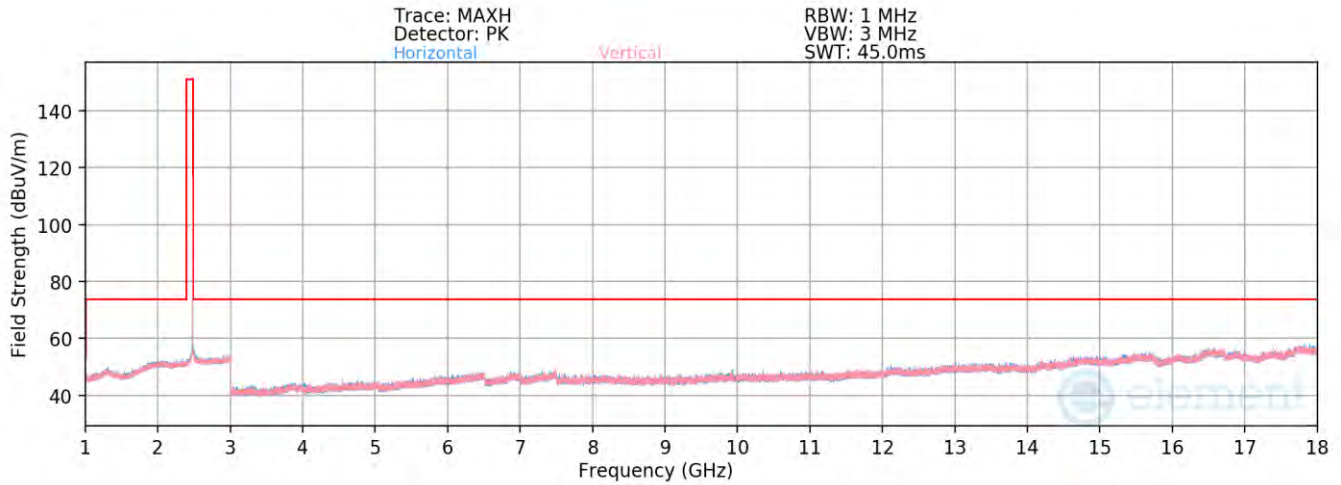

Plot 7-99. Radiated Spurious Emissions above 1GHz TxBF (BT GFSK ePA – Ch. 78)

Bluetooth Mode: GFSK
 Data Rate: 1Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	-	-	-	-65.30	3.72	45.42	73.98	-28.56
7440.00	Peak	-	-	-	-65.67	7.51	48.84	73.98	-25.14
12400.00	Peak	-	-	-	-67.67	11.08	50.41	73.98	-23.57


Table 7-29. Radiated Measurements TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 90 of 118


7.9.5 Simultaneous Tx Radiated Spurious Emissions Measurements §15.209; RSS-Gen [8.9]

Description	Bluetooth	UNII
Antenna	Antenna WF8	Antenna WF8
Channel	79	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11n

Table 7-30. Worst Case Simultaneous Transmission Configuration

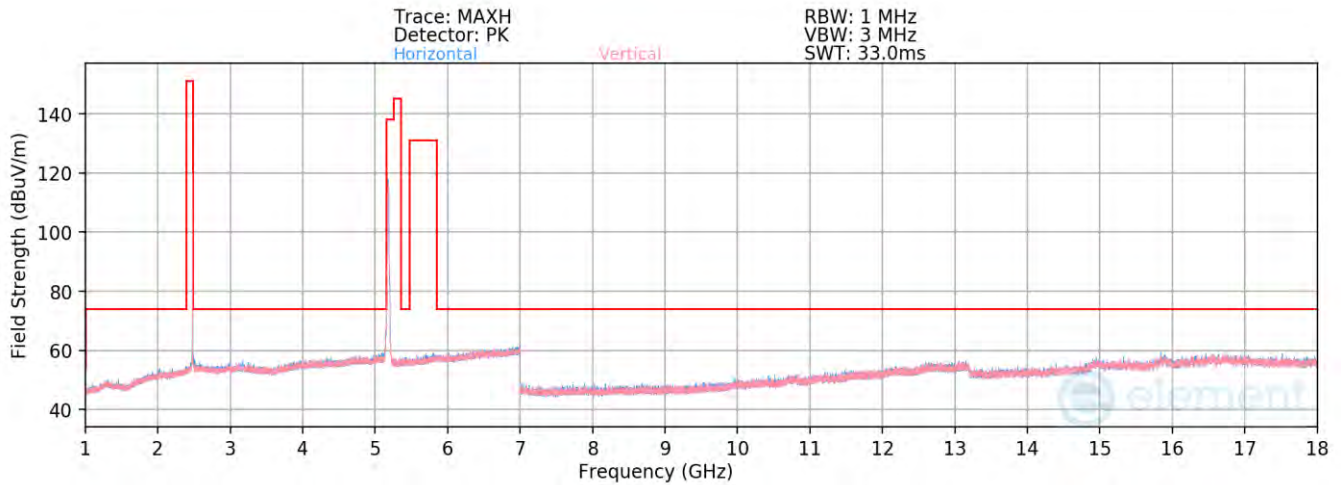

Plot 7-100. Radiated Spurious Emissions 1 – 18GHz – Simultaneous Transmission

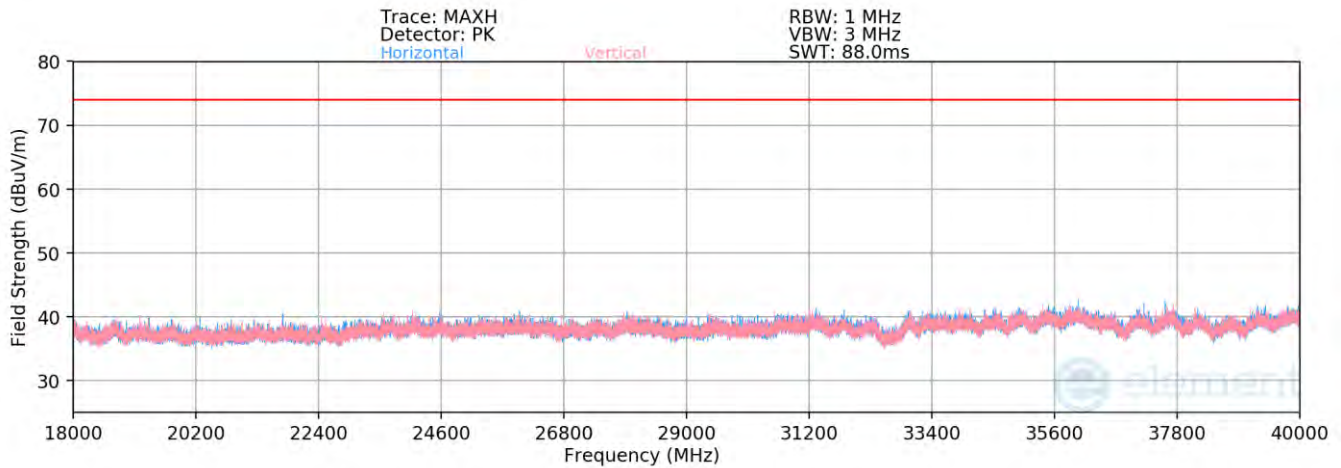

Plot 7-101. Radiated Spurious Emissions Above 18GHz – Simultaneous Transmission)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 91 of 118

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4960.00	Peak	-	-	-	-69.16	17.05	54.89	73.98	-19.09
7440.00	Peak	-	-	-	-70.76	11.50	47.74	73.98	-26.24
12400.00	Peak	-	-	-	-73.34	18.60	52.26	73.98	-21.72

Table 7-31. Bluetooth Harmonics Emission Measurements - Simultaneous Transmission

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10360.00	Peak	-	-	-	-71.62	14.72	50.10	68.20	-18.10
* 15540.00	Average	-	-	-	-84.82	23.02	45.20	53.98	-8.78
* 15540.00	Peak	-	-	-	-73.89	23.02	56.13	73.98	-17.85

Table 7-32. UNII Emission Measurements - Simultaneous Transmission

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 92 of 118

7.9.6 Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Antenna WF8


Bluetooth Mode: GFSK

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2402MHz

Channel: 0

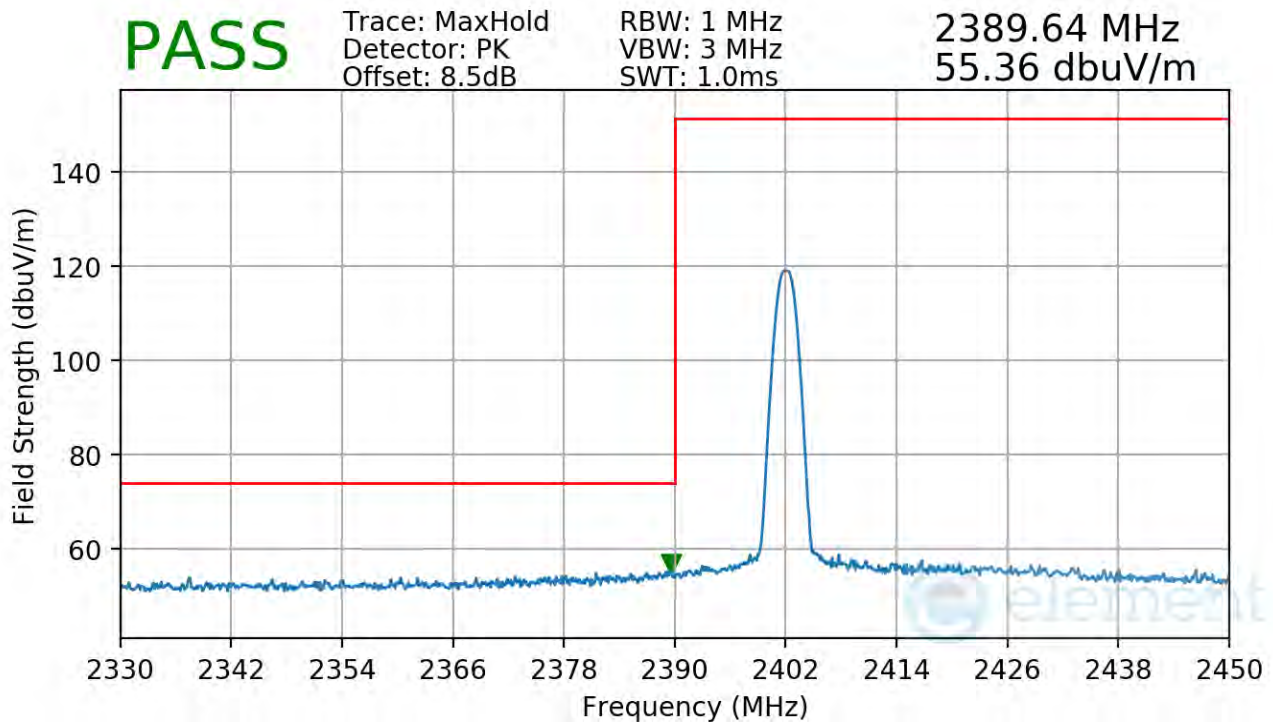


Plot 7-102. Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 93 of 118

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

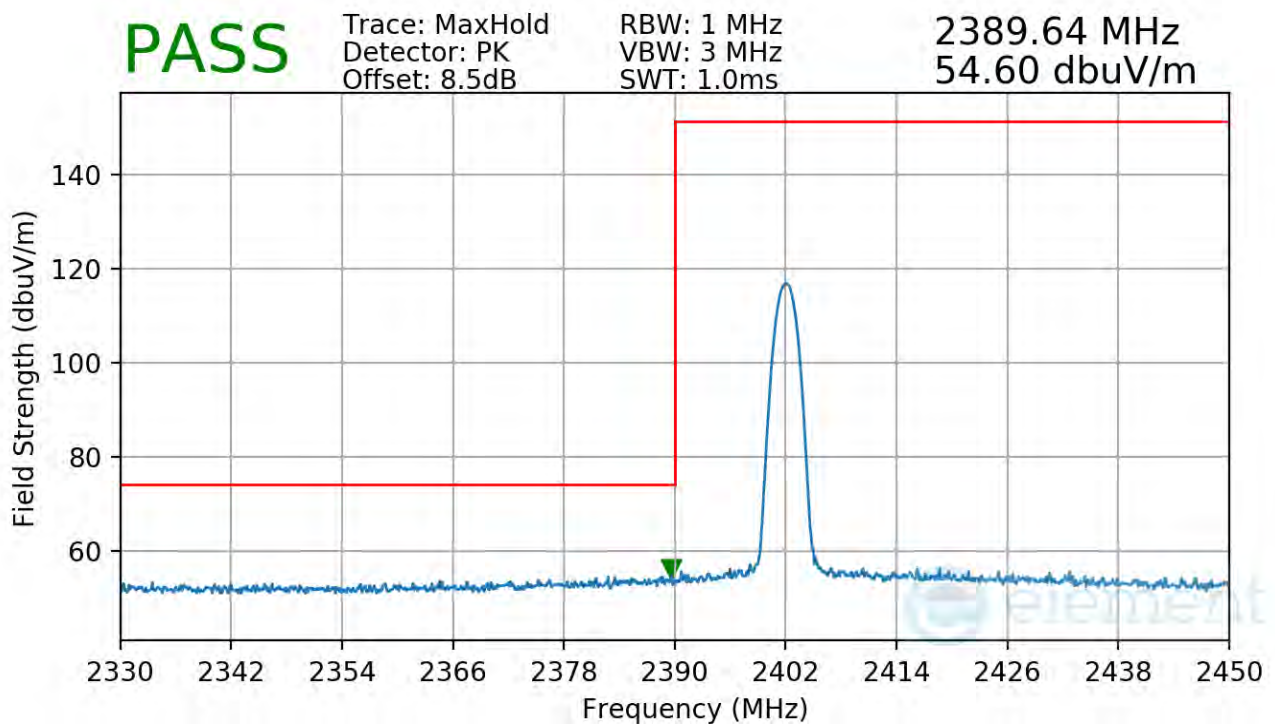


Plot 7-103. Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 94 of 118

V 10.6 09/13/2023

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: GFSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

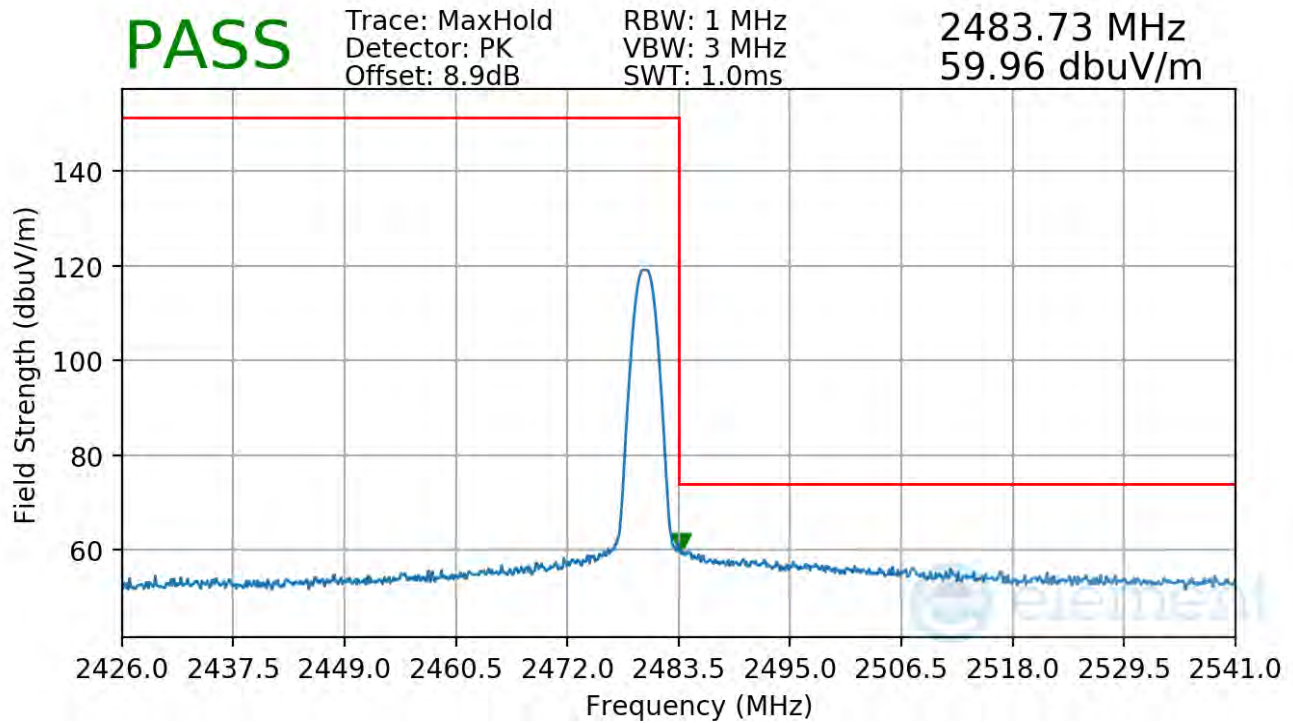


Plot 7-104. Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 95 of 118

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

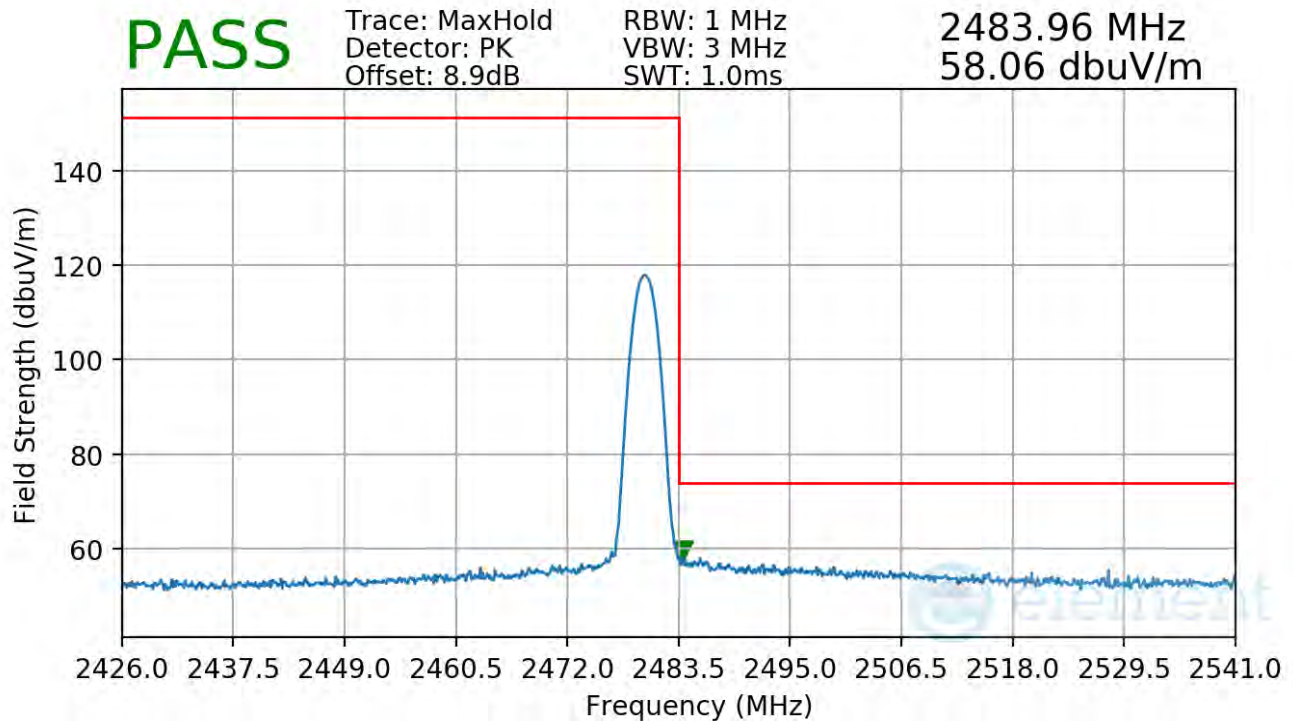

Plot 7-105. Radiated Restricted Upper Band Edge Measurement Antenna WF8


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 96 of 118

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Antenna WF7

Bluetooth Mode: GFSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

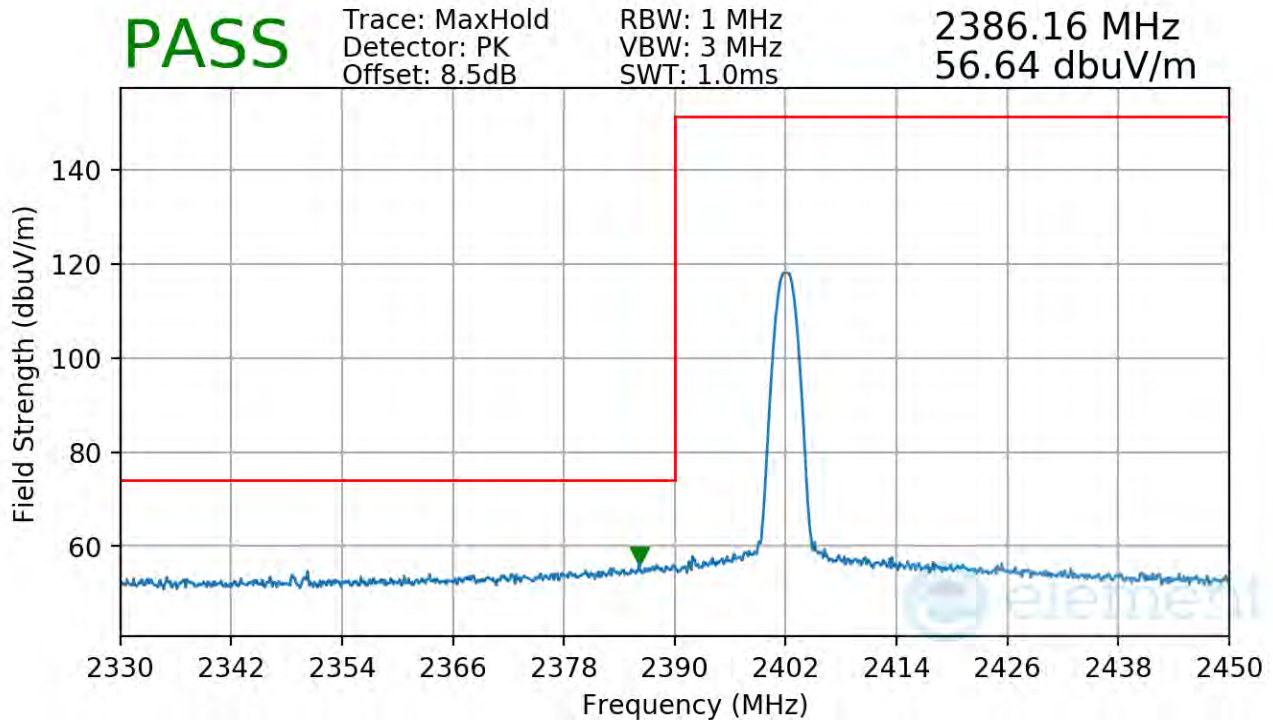


Plot 7-106. Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 97 of 118

V 10.6 09/13/2023

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

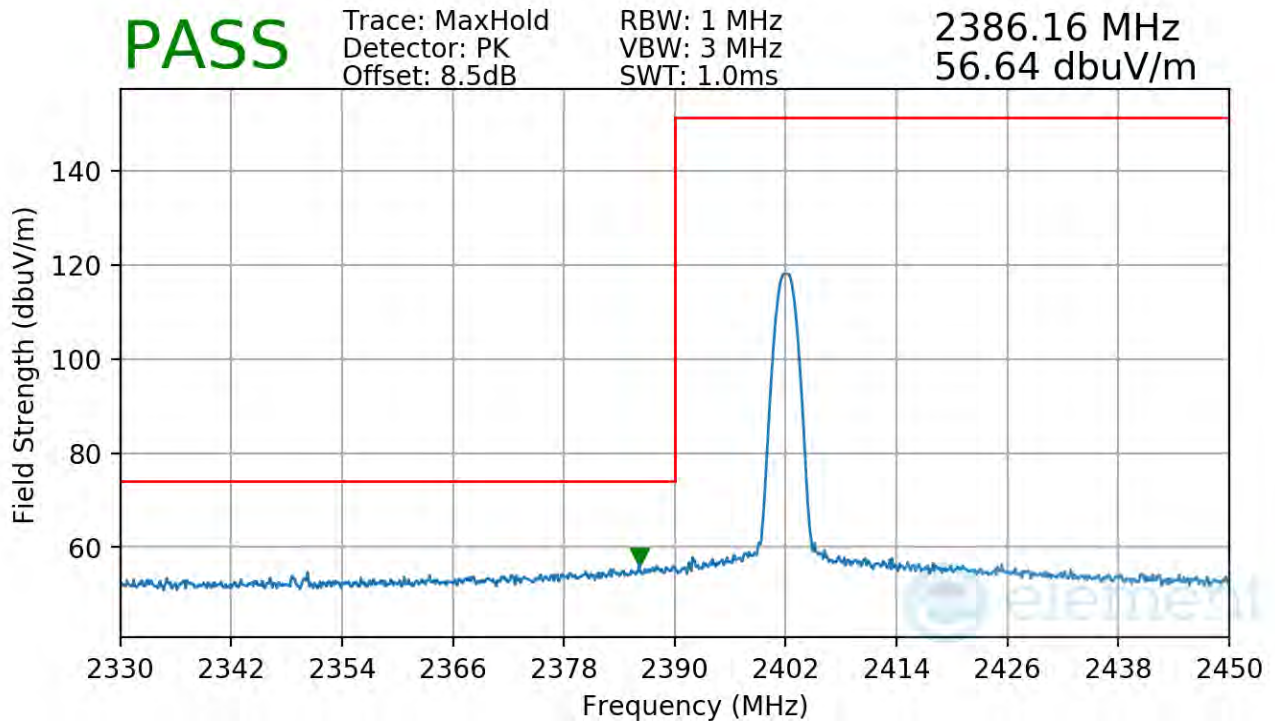


Plot 7-107. Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 98 of 118

V 10.6 09/13/2023

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: GFSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

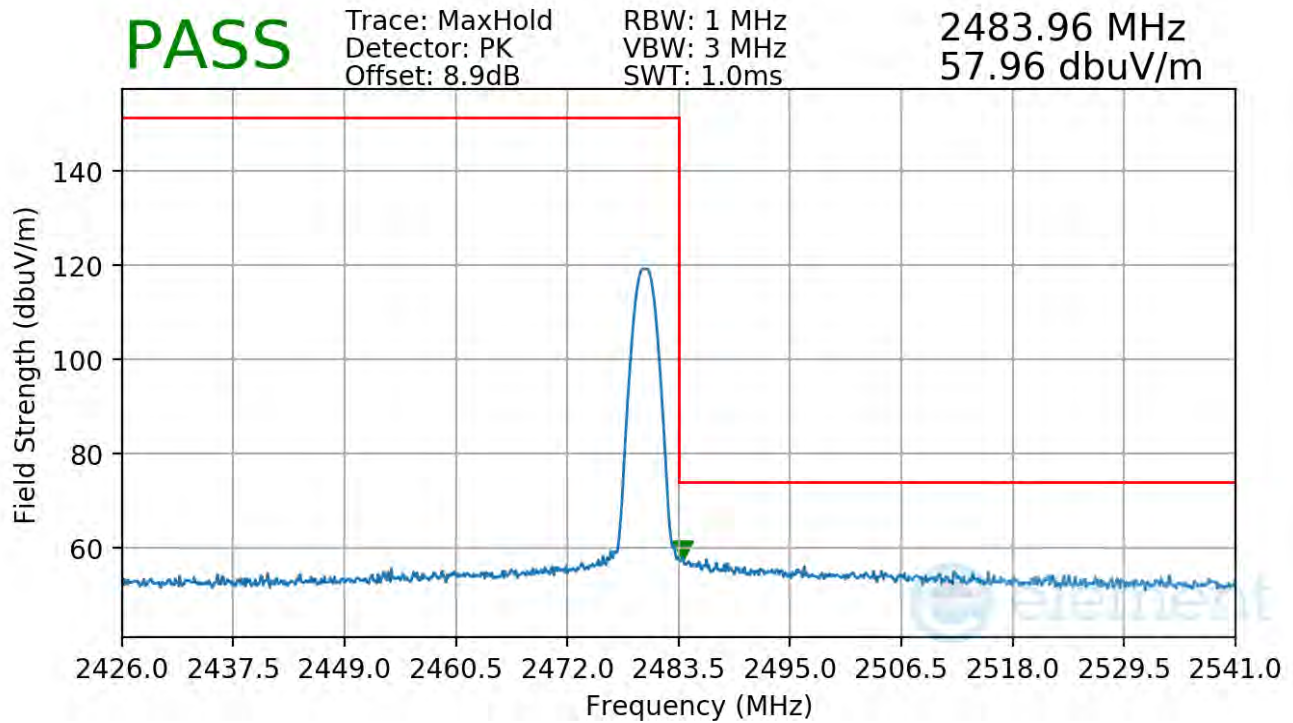


Plot 7-108. Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 99 of 118

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

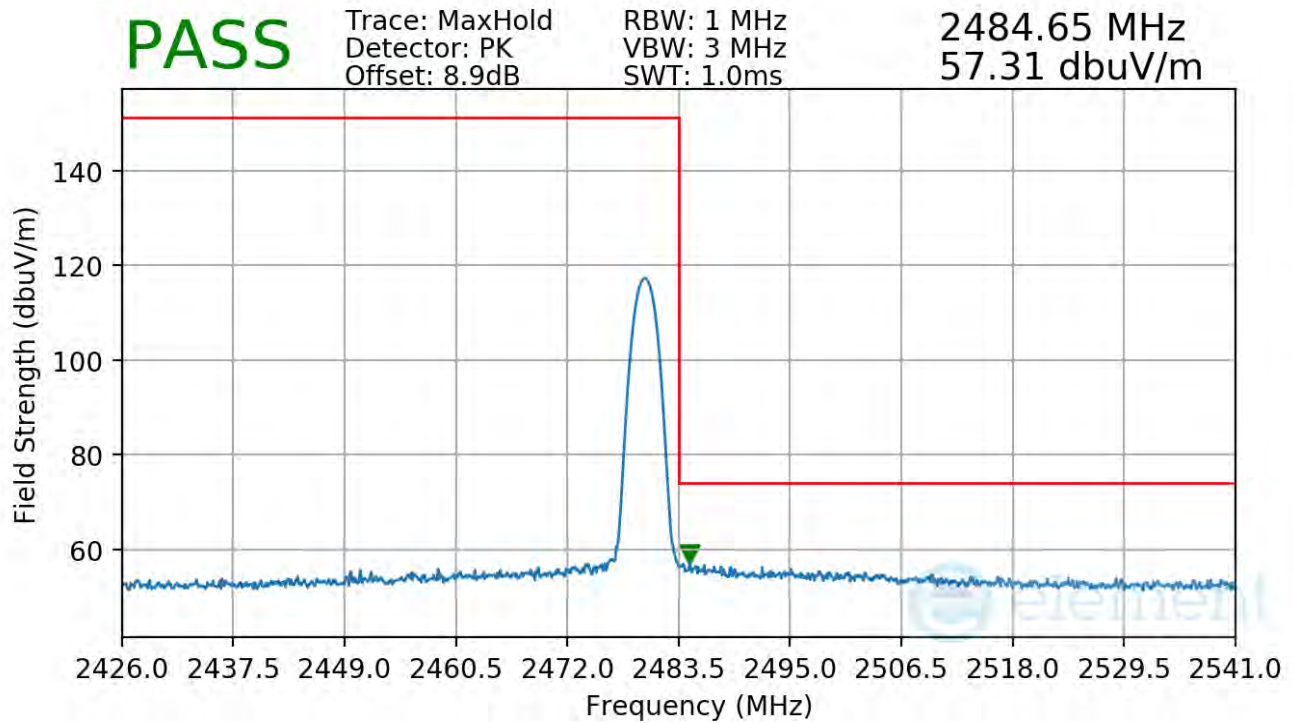


Plot 7-109. Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 100 of 118

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Antenna WF9

Bluetooth Mode: GFSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

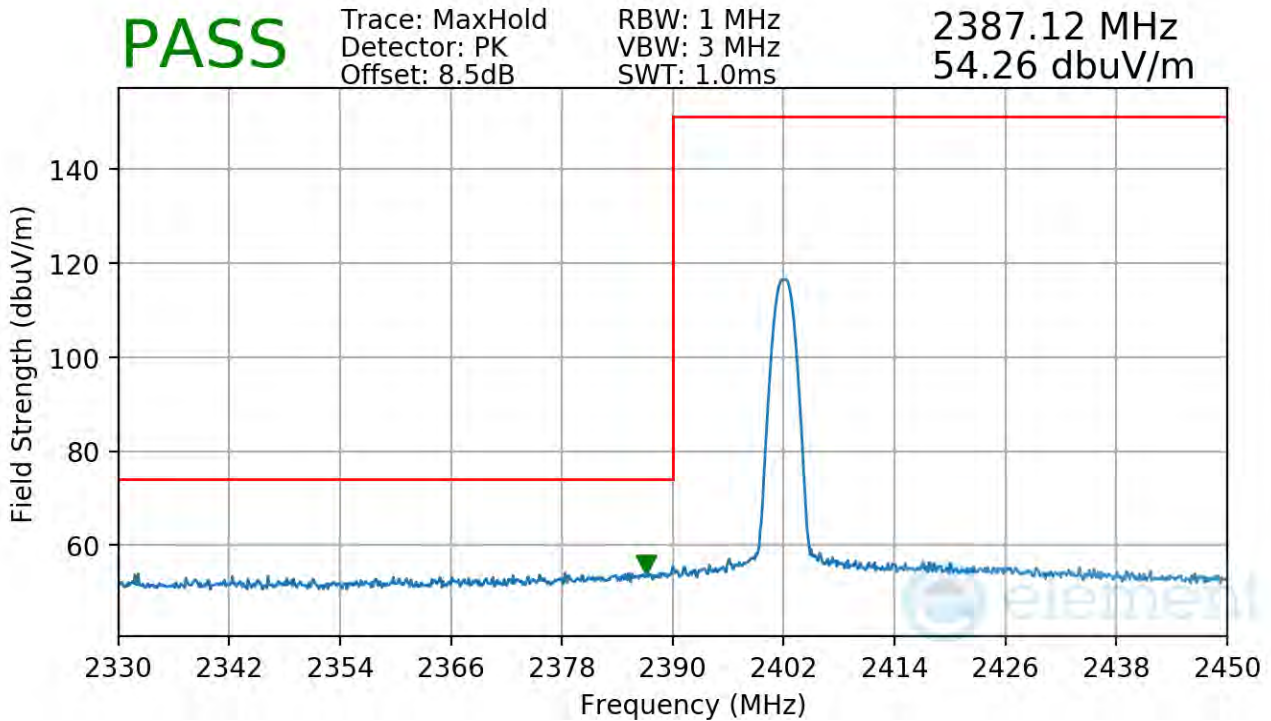


Plot 7-110. Radiated Restricted Lower Band Edge Measurement Antenna WF9

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 101 of 118

V 10.6 09/13/2023

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

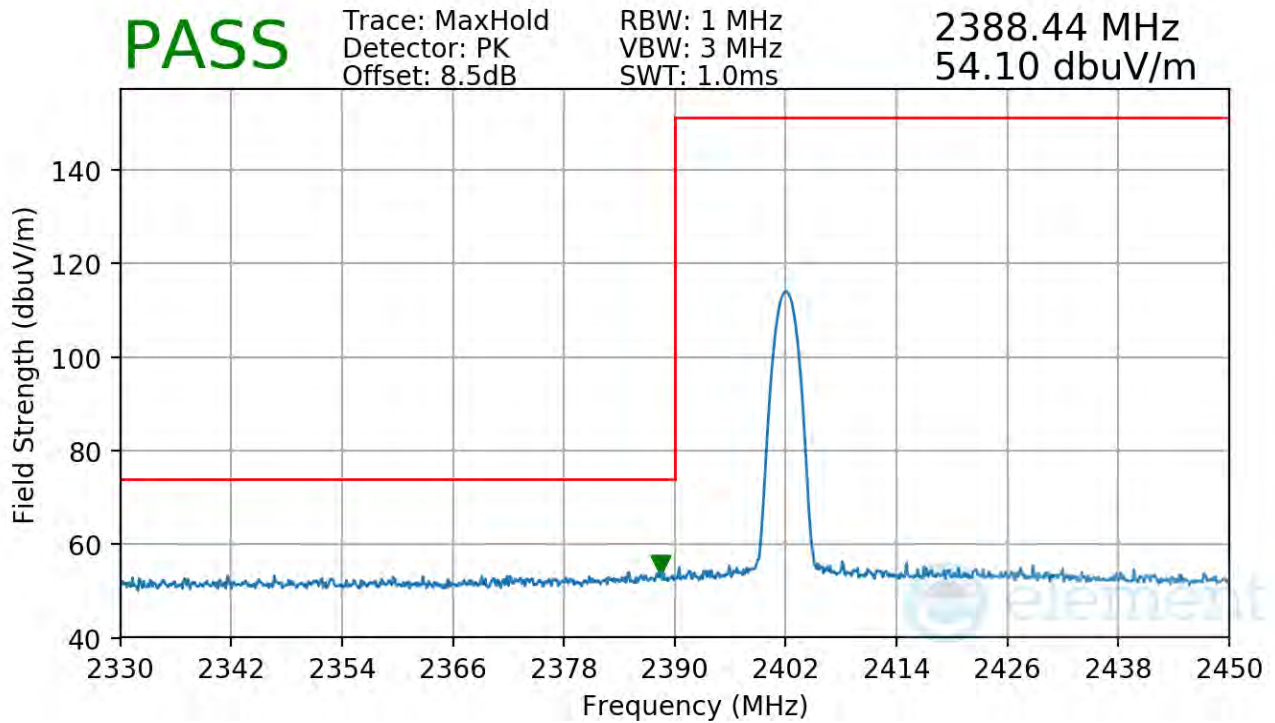

Plot 7-111. Radiated Restricted Lower Band Edge Measurement Antenna WF9


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 102 of 118

V 10.6 09/13/2023

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: GFSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

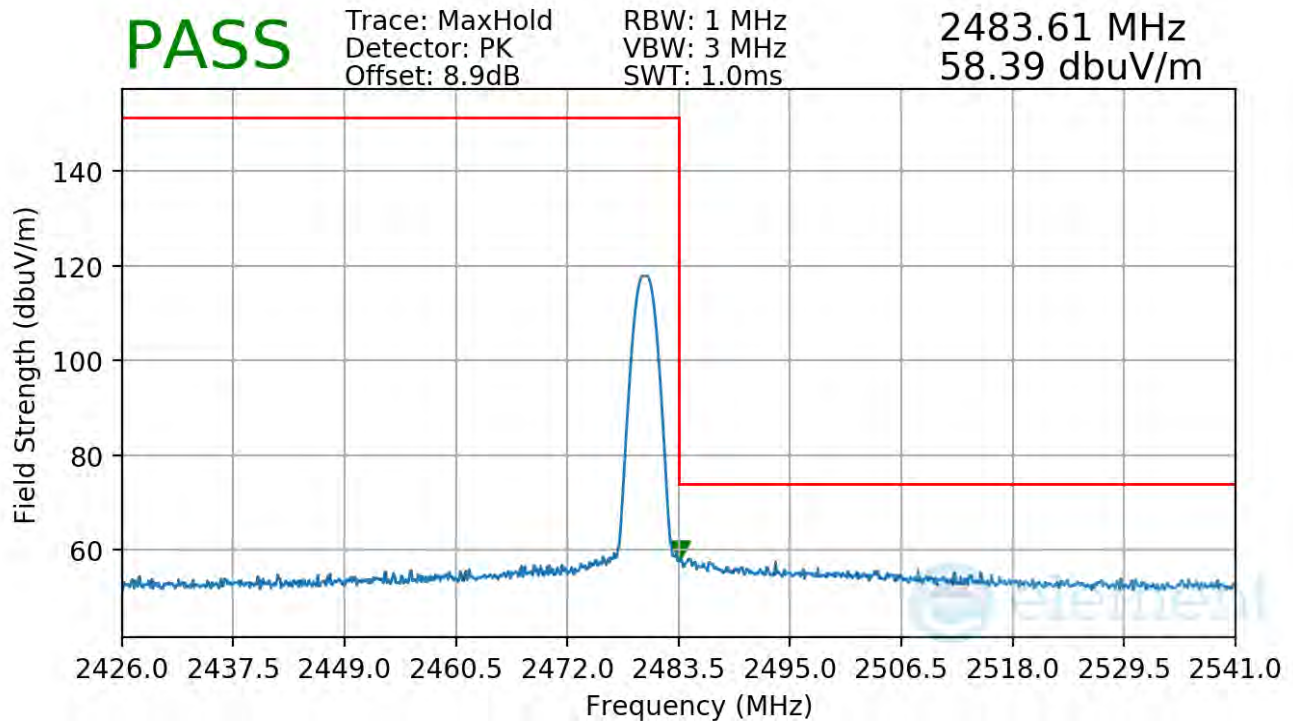


Plot 7-112. Radiated Restricted Upper Band Edge Measurement Antenna WF9

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 103 of 118

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

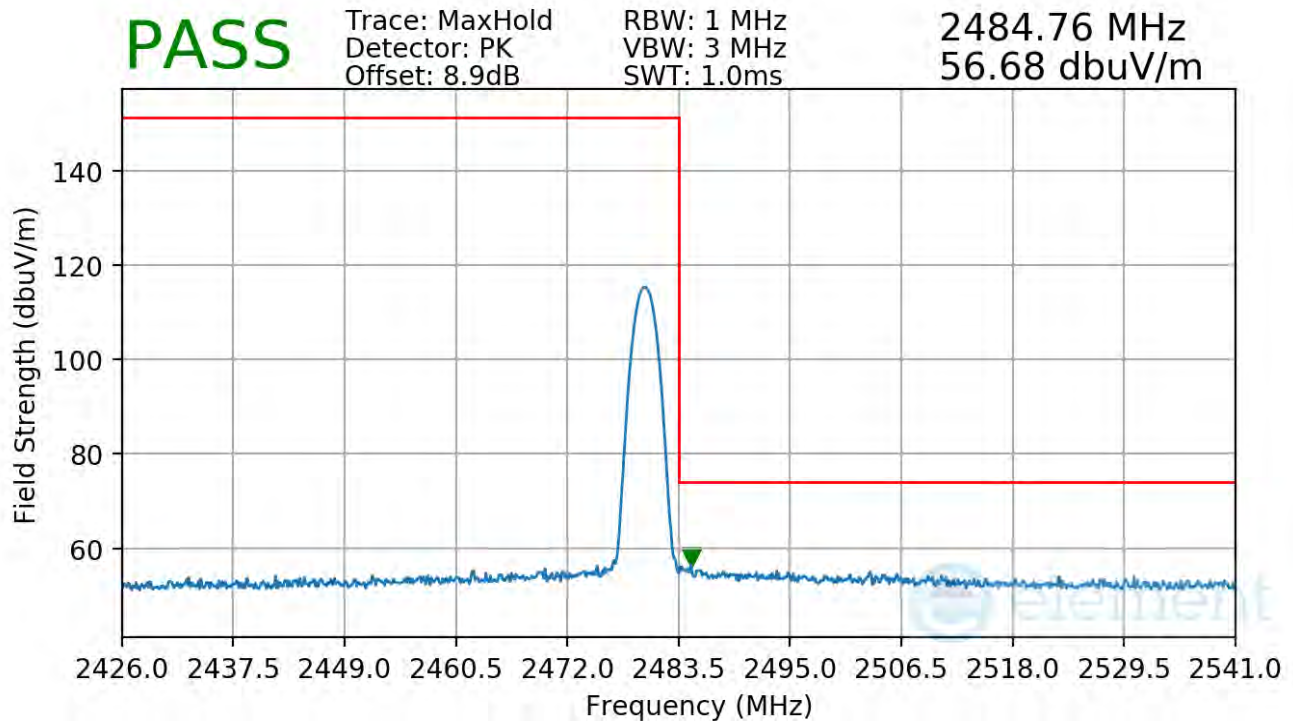

Plot 7-113. Radiated Restricted Upper Band Edge Measurement Antenna WF9


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 104 of 118

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

TxBF

Bluetooth Mode: GFSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

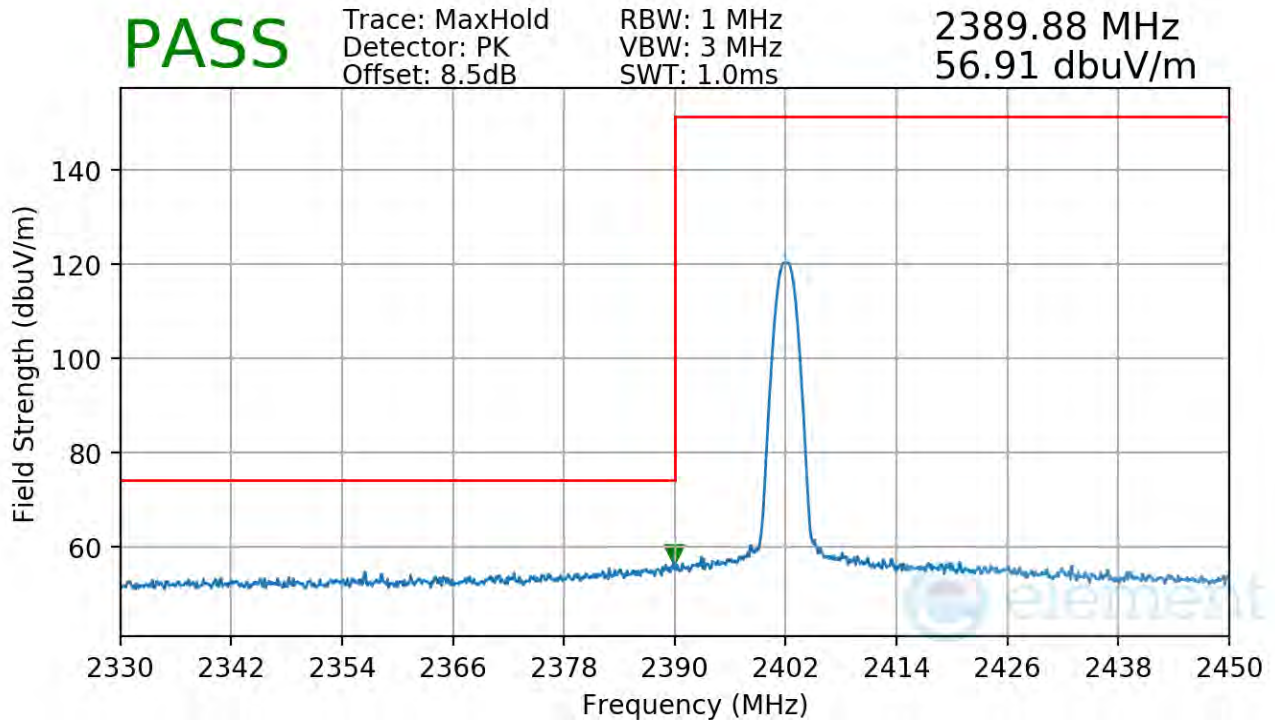


Plot 7-114. Radiated Restricted Lower Band Edge Measurement TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 105 of 118

V 10.6 09/13/2023

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

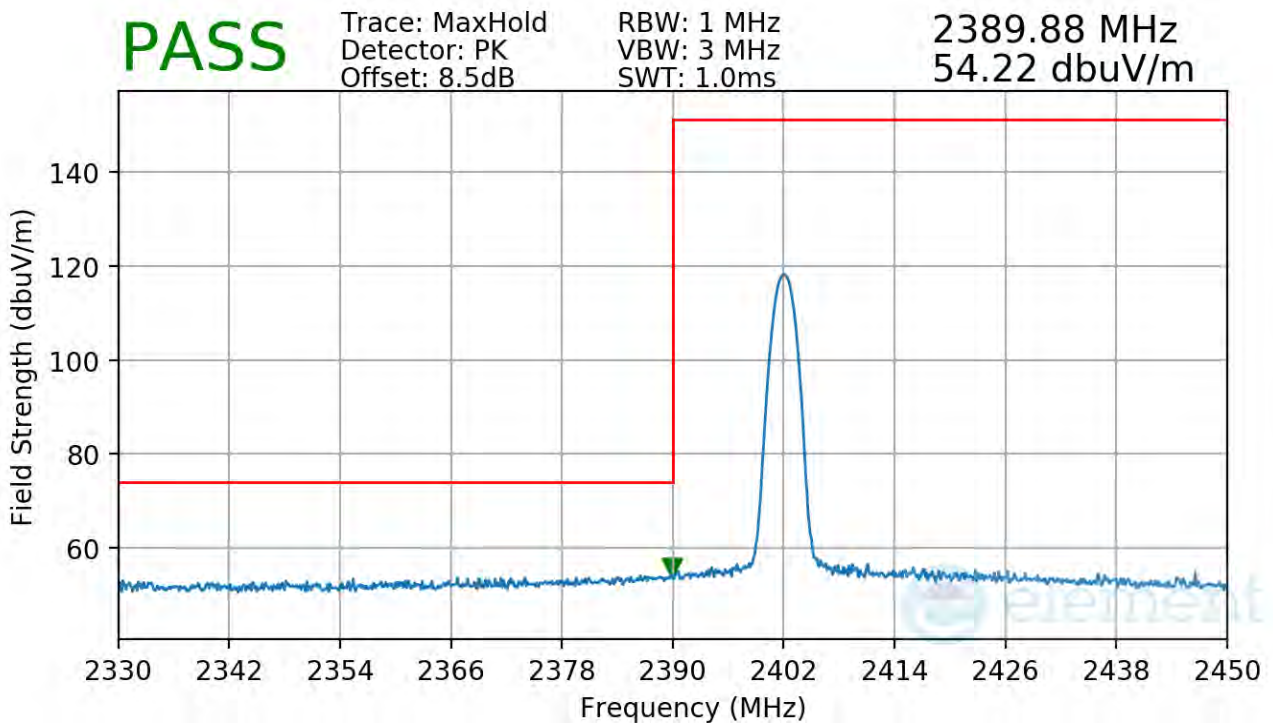


Plot 7-115. Radiated Restricted Lower Band Edge Measurement TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 106 of 118

Radiated Restricted Band Edge Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: GFSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

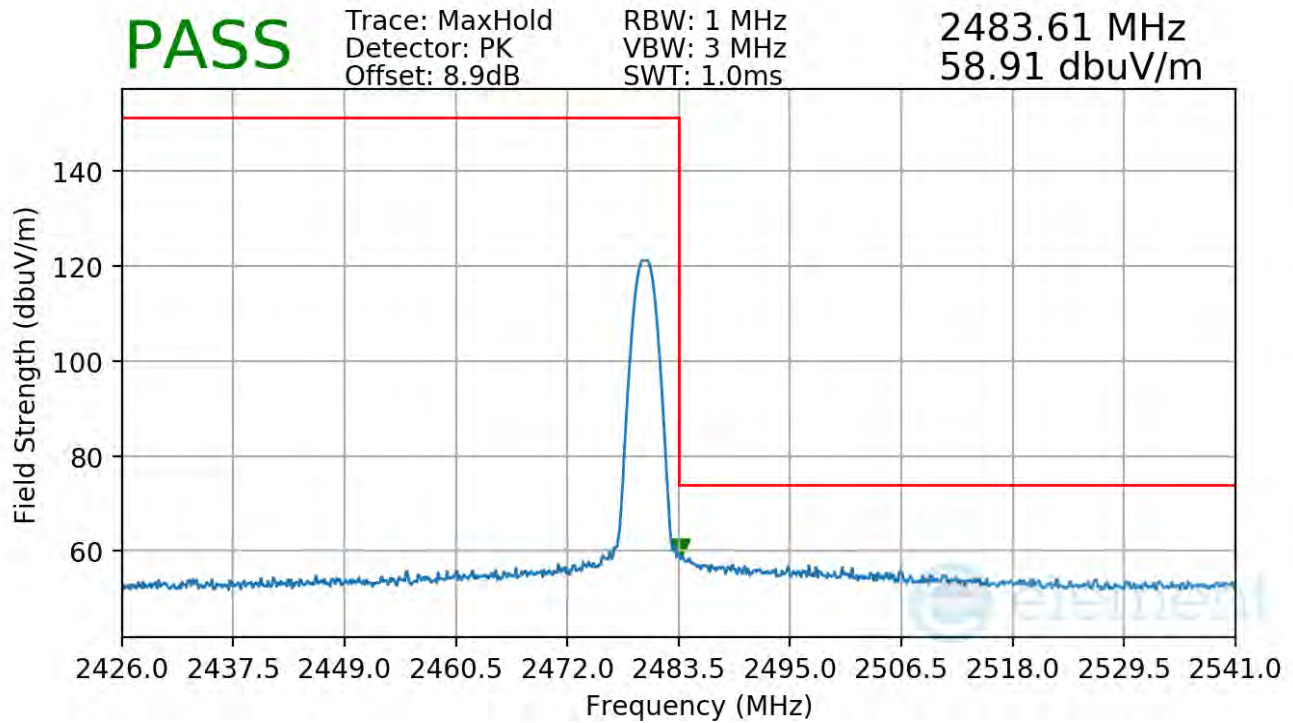


Plot 7-116. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 107 of 118

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

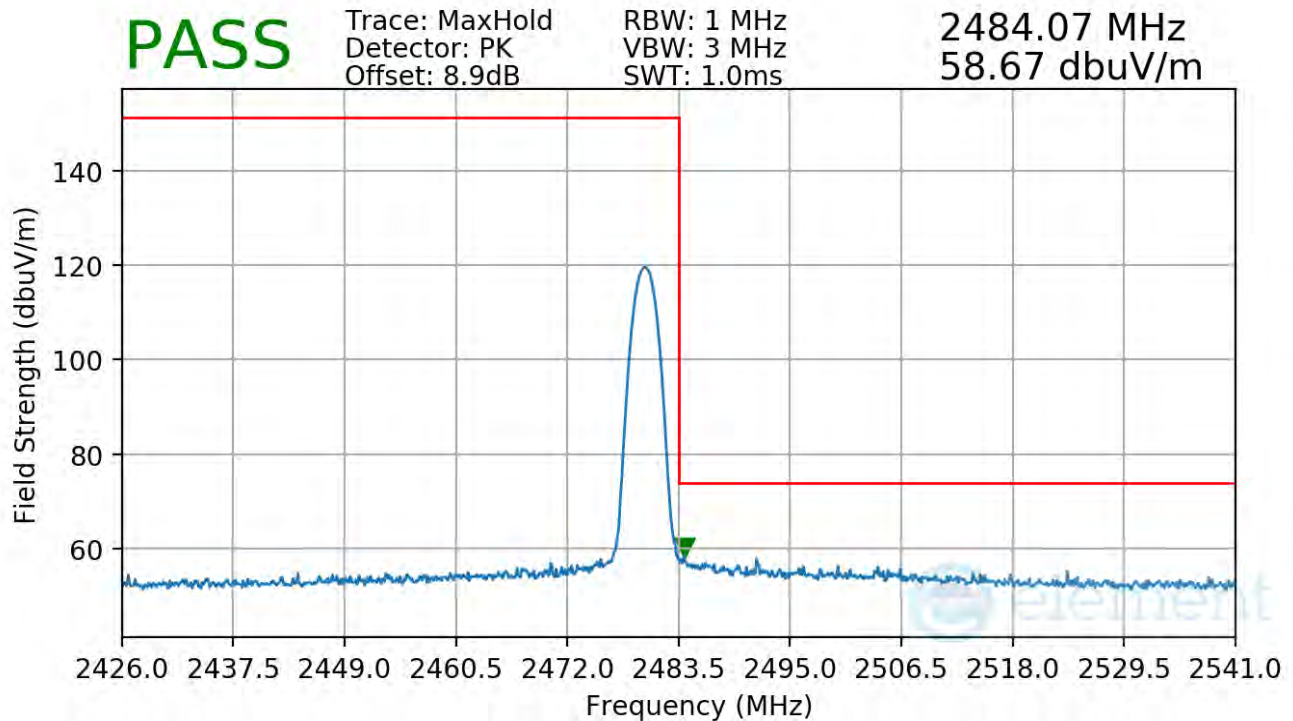

Plot 7-117. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 108 of 118

7.10 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-33 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-33. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 109 of 118

V 10.6 09/13/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

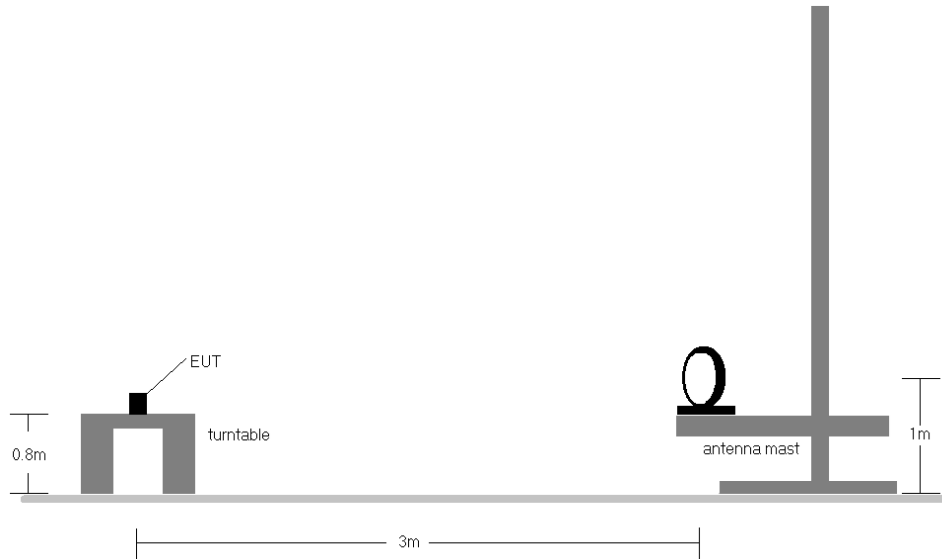


Figure 7-9. Radiated Test Setup < 30MHz

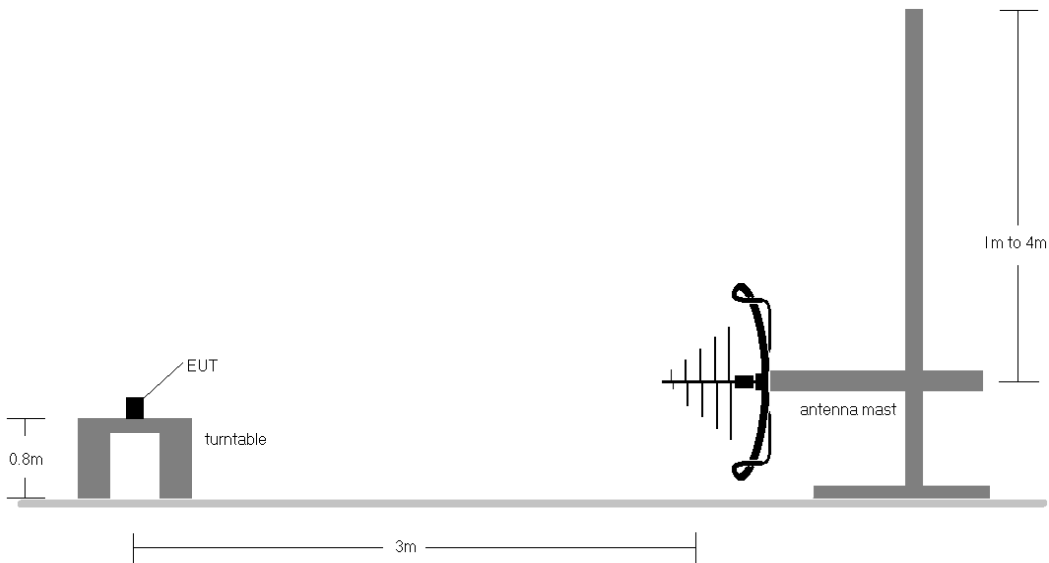


Figure 7-10. Radiated Test Setup < 1GHz

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 110 of 118

V 10.6 09/13/2023

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-33.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$ – Preamplifier Gain $_{[dB]}$
- Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 111 of 118

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

TxBF

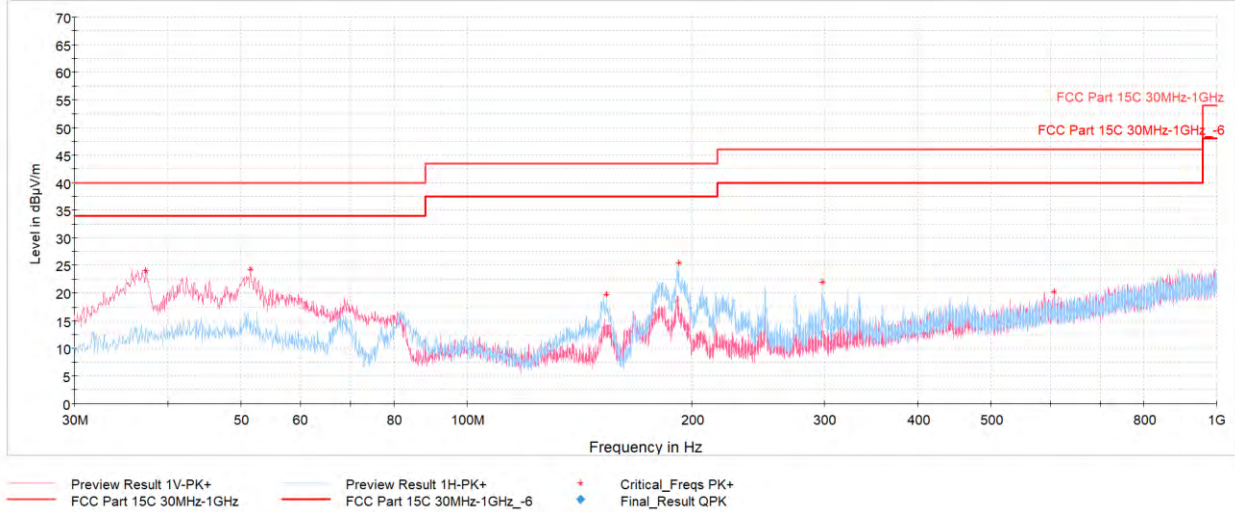


Plot 7-118. Radiated Spurious Emissions Below 1GHz TxBF (GFSK ePA – Ch.39, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.37	Max-Peak	V	100	34	-67.85	-15.14	24.01	40.00	-15.99
51.53	Max-Peak	V	100	51	-69.60	-13.12	24.28	40.00	-15.72
153.58	Max-Peak	H	200	199	-67.28	-20.01	19.71	43.52	-23.81
191.99	Max-Peak	H	100	205	-64.27	-17.25	25.48	43.52	-18.04
298.16	Max-Peak	H	100	6	-70.48	-14.57	21.95	46.02	-24.07
606.81	Max-Peak	V	100	101	-79.29	-7.46	20.25	46.02	-25.77

Table 7-34. Radiated Spurious Emissions Below 1GHz TxBF (GFSK ePA – Ch.39 with AC/DC Adapter)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 112 of 118

Simultaneous Tx Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

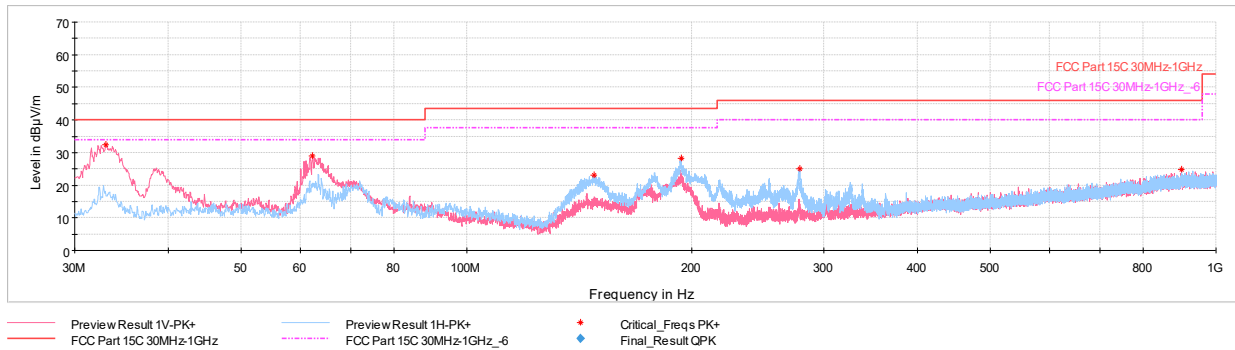

Plot 7-119. Worst Case Simultaneous Transmission Configuration

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
33.06	Max-Peak	V	100	282	-58.69	-15.93	32.38	40.00	-7.62
62.30	Max-Peak	V	100	20	-62.16	-15.87	28.97	40.00	-11.03
148.05	Max-Peak	H	200	197	-63.65	-20.33	23.02	43.52	-20.50
193.35	Max-Peak	H	100	238	-61.64	-17.08	28.28	43.52	-15.24
278.27	Max-Peak	H	100	270	-67.02	-15.03	24.95	46.02	-21.07
899.94	Max-Peak	H	100	45	-79.64	-2.47	24.89	46.02	-21.13

Table 7-35. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 113 of 118

7.11 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-36. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 114 of 118

V 10.6 09/13/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


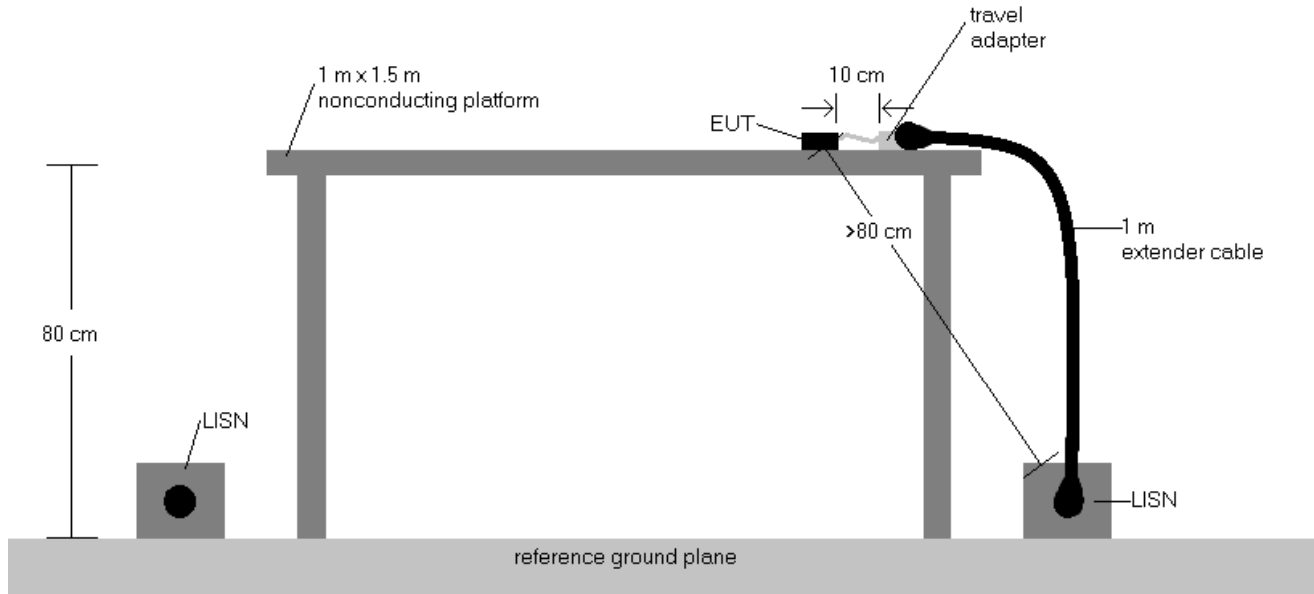


Figure 7-11. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using a quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 115 of 118

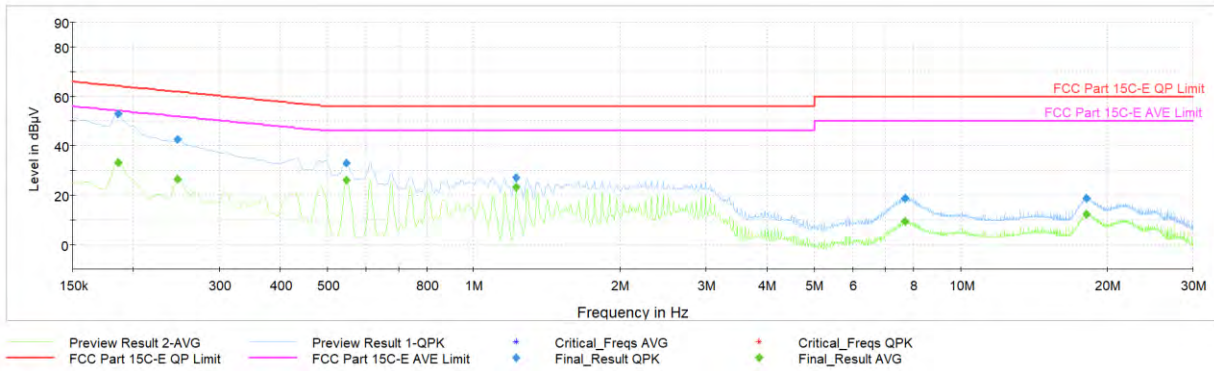


Plot 7-120. AC Line-Conducted Test Plot TxBF (L1, GFSK ePA – Ch.39, with Laptop)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.161	FINAL	—	29.17	55.40	-26.23	L1	GND
0.161	FINAL	51.4	—	65.40	-14.03	L1	GND
0.200	FINAL	—	34.07	53.63	-19.56	L1	GND
0.200	FINAL	48.4	—	63.63	-15.28	L1	GND
0.546	FINAL	—	28.29	46.00	-17.71	L1	GND
0.546	FINAL	37.2	—	56.00	-18.83	L1	GND
1.223	FINAL	29.0	—	56.00	-26.97	L1	GND
1.223	FINAL	—	25.00	46.00	-21.00	L1	GND
7.609	FINAL	21.6	—	60.00	-38.44	L1	GND
7.609	FINAL	—	11.00	50.00	-39.00	L1	GND
19.910	FINAL	—	13.41	50.00	-36.59	L1	GND
19.910	FINAL	19.7	—	60.00	-40.29	L1	GND

Table 7-37. AC Line-Conducted Test Data TxBF (L1, GFSK ePA – Ch.39, with Laptop)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 116 of 118

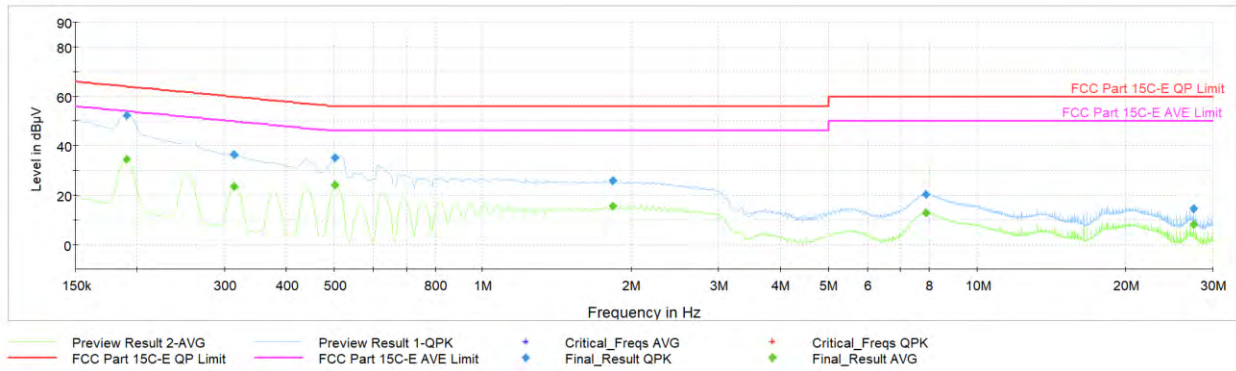

Plot 7-121. AC Line-Conducted Test Plot TxBF (N, GFSK ePA – Ch.39, with Laptop)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	—	19.59	55.88	-36.29	N	GND
0.152	FINAL	51.2	—	65.88	-14.67	N	GND
0.197	FINAL	—	35.01	53.73	-18.71	N	GND
0.197	FINAL	51.0	—	63.73	-12.78	N	GND
0.391	FINAL	—	25.93	48.05	-22.12	N	GND
0.391	FINAL	37.3	—	58.05	-20.74	N	GND
0.589	FINAL	35.0	—	56.00	-20.96	N	GND
0.589	FINAL	—	24.21	46.00	-21.79	N	GND
7.872	FINAL	20.9	—	60.00	-39.06	N	GND
7.872	FINAL	—	13.48	50.00	-36.52	N	GND
18.366	FINAL	—	10.07	50.00	-39.93	N	GND
18.366	FINAL	16.4	—	60.00	-43.58	N	GND

Table 7-38. AC Line-Conducted Test Data TxBF (N, GFSK ePA – Ch.39, with Laptop)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 117 of 118

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2836 and IC: 579C-A2836** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-07.BCG	Test Dates: 11/28/2023 - 2/22/2024	EUT Type: Tablet Device	Page 118 of 118