

MEASUREMENT REPORT
FCC PART 15.407 / ISED RSS-247 UNII 802.11a/n/ac/ax(SU)

Applicant Name:

Apple Inc.
 One Apple Park Way
 Cupertino, CA 95014

Date of Testing:

12/06/202 - 02/20/2024

Test Report Issue Date:

4/1/2024

Test Site/Location:

Element Materials Technology Morgan Hill

Test Report Serial No.:

1C2311270067-11-R1.BCG

FCC ID:	BCGA2836
IC:	579C-A2836
APPLICANT:	Apple Inc.

Application Type:

Certification

Model/HVIN:

A2836

EUT Type:

Tablet Device

Frequency Range:

5180 – 5825MHz

Modulation Type:

OFDM

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-247 Issue 3

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01

KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N:1C2311270067-11-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
 Executive Vice President

Prepared by: WKR0000005849

Reviewed by: WKR0000005796



FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 1 of 595



TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope.....	5
1.2	Element Materials Technology Test Location	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description.....	9
2.4	Test Support Equipment.....	10
2.5	Test Configuration.....	10
2.6	Software and Firmware	11
2.7	EMI Suppression Device(s)/Modifications.....	11
3.0	DESCRIPTION OF TESTS	12
3.1	Evaluation Procedure.....	12
3.2	AC Line Conducted Emissions	12
3.3	Radiated Emissions.....	13
3.4	Environmental Conditions.....	13
4.0	ANTENNA REQUIREMENTS	14
5.0	MEASUREMENT UNCERTAINTY	15
6.0	TEST EQUIPMENT CALIBRATION DATA.....	16
7.0	TEST RESULTS	17
7.1	Summary.....	17
7.2	26dB & 99% Bandwidth Measurement – 802.11a/n/ac/ax(SU)	18
7.3	6dB & 99% Bandwidth Measurement – 802.11a/n/ac/ax(SU)	64
7.4	Conducted Output Power and Max EIRP Measurement – 802.11a/n/ac/ax(SU)	77
7.5	Maximum Power Spectral Density – 802.11a/n/ac/ax(SU).....	140
7.6	Radiated Spurious Emissions – Above 1GHz.....	286
7.7	Radiated Spurious Emissions – Below 1GHz	545
7.8	AC Line-Conducted Emissions Measurement.....	585
8.0	CONCLUSION.....	595

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 2 of 595



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD Primary				CDD Diversity							
				Antenna WFB5		Antenna WFB7		Antenna WFB9		Antenna WFB5		Antenna WFB7		Antenna WFB9		Antenna WFB5		Antenna WFB7			
				Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)		
1	20	802.11a	5190-5240	93.907	19.73	86.833	19.85	98.175	19.92	50.015	16.99	49.317	16.93	98.855	19.95	50.119	17.00	49.306	16.93	99.083	19.96
2A	20	802.11a	5280-5320	99.015	19.96	100.000	20.00	98.401	19.93	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01
2C	20	802.11a	5500-5720	99.541	19.98	99.541	19.98	99.083	19.96	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01
3	20	802.11a	5745-5825	100.000	20.00	98.175	19.92	98.855	19.95	100.000	20.00	100.000	20.00	199.986	23.01	98.175	19.92	97.949	19.91	195.434	22.91
1	40	802.11n	5190-5230	96.805	19.86	100.000	20.00	97.724	19.90	89.125	19.50	88.349	19.46	177.419	22.49	89.125	19.50	79.232	19.89	168.267	22.26
2A	40	802.11n	5270-5310	96.962	19.87	99.106	19.86	98.175	19.92	89.125	19.50	88.308	19.46	177.419	22.49	87.862	19.44	83.664	19.22	171.396	22.34
2C	40	802.11n	5510-5710	98.401	19.93	96.405	19.84	99.083	19.96	89.125	19.50	89.125	19.50	178.238	22.51	88.818	19.49	89.125	19.50	176.198	22.46
3	40	802.11n	5750-5795	98.333	19.93	99.678	19.89	98.175	19.92	98.183	19.83	98.366	19.83	190.642	22.87	92.312	19.87	97.277	19.41	184.502	22.66
1	80	802.11ac	5210	28.965	14.31	27.002	14.31	27.530	14.40	22.387	13.50	22.162	13.46	44.566	16.34	22.387	13.50	22.024	13.43	44.361	16.47
2A	80	802.11ac	5290	39.174	15.93	38.744	15.88	38.230	15.82	26.959	14.31	27.283	14.36	54.200	17.34	27.378	14.37	28.184	14.50	55.590	17.47
2C	80	802.11ac	5630-5690	98.175	19.92	98.175	19.92	96.828	19.86	96.828	19.86	98.810	19.85	196.434	22.91	93.886	19.73	77.535	18.90	171.396	22.34
3	80	802.11ac	5775	73.282	18.65	73.282	18.65	74.131	18.70	65.917	18.19	66.222	18.21	132.130	21.21	65.118	18.14	64.834	18.12	130.017	21.14
1/2A	160	802.11ac	5250	17.738	12.49	17.551	12.44	17.579	12.45	15.417	11.88	15.849	12.00	31.261	14.95	15.688	11.95	15.778	11.98	31.477	14.98
3	160	802.11ac	5570	15.304	11.85	15.226	11.83	15.453	11.89	10.965	10.40	11.015	10.42	21.979	13.42	10.960	10.41	11.117	10.46	22.131	13.45
1	20	802.11ax(SU)	5190-5240	97.051	19.87	99.197	19.97	99.083	19.96	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01
2A	20	802.11ax(SU)	5280-5320	95.675	19.81	97.724	19.90	99.083	19.96	50.119	17.00	50.119	17.00	98.401	19.93	50.119	17.00	50.119	17.00	100.231	20.01
2C	20	802.11ax(SU)	5500-5720	96.761	19.86	100.000	20.00	97.724	19.90	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01
3	20	802.11ax(SU)	5745-5825	100.000	20.00	99.357	19.97	98.824	19.95	100.000	20.00	95.940	19.82	196.884	22.92	100.000	20.00	99.929	19.94	187.068	22.72
1	40	802.11ax(SU)	5190-5230	98.514	19.94	100.000	20.00	99.120	19.80	89.125	19.50	89.125	19.50	178.238	22.51	89.125	19.50	81.639	19.12	170.638	22.32
2A	40	802.11ax(SU)	5270-5310	98.862	19.87	100.000	20.00	99.400	19.90	89.125	19.50	89.308	19.46	177.419	22.49	87.862	19.44	83.664	19.22	171.396	22.34
2C	40	802.11ax(SU)	5510-5710	97.320	19.88	100.000	20.00	97.724	19.90	89.125	19.50	89.125	19.50	178.238	22.51	89.125	19.50	86.876	19.39	174.985	22.43
3	40	802.11ax(SU)	5750-5795	97.611	19.90	100.000	20.00	98.855	19.95	96.895	19.86	96.895	19.86	196.789	22.94	96.741	19.81	89.372	19.51	184.077	22.65
1	80	802.11ax(SU)	5210	24.946	13.97	25.119	14.00	23.983	13.80	17.783	12.50	17.758	12.49	35.563	15.51	17.151	12.34	17.783	12.50	34.914	15.43
2A	80	802.11ax(SU)	5290	27.561	14.40	28.184	14.40	27.727	14.43	24.666	13.92	23.878	13.78	48.529	16.86	25.119	14.00	23.950	13.79	49.091	16.91
2C	80	802.11ax(SU)	5530-5690	97.724	19.90	95.499	19.80	96.719	19.81	96.805	19.85	97.275	19.88	194.089	22.88	95.741	19.81	97.275	19.88	193.197	22.86
3	80	802.11ax(SU)	5775	61.944	17.92	61.944	17.92	61.944	17.92	52.360	17.19	51.761	17.14	104.232	20.18	52.360	17.19	52.481	17.20	104.954	20.21
1/2A	160	802.11ax(SU)	5250	17.450	12.42	17.783	12.50	16.672	12.22	15.417	11.88	15.888	11.90	30.903	14.90	15.524	11.91	15.586	11.93	31.117	14.93
2C	160	802.11ax(SU)	5570	15.778	11.98	15.143	11.80	15.488	11.90	10.990	10.41	11.194	10.49	22.182	13.46	10.914	10.38	10.990	10.41	21.928	13.41

FCC EUT Overview (Low Data Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD Primary				CDD Diversity							
				Antenna WFB5		Antenna WFB7		Antenna WFB9		Antenna WFB5		Antenna WFB7		Antenna WFB9		Antenna WFB5		Antenna WFB7			
				Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)		
1	20	802.11a	5190-5240	47.315	16.75	47.315	16.75	47.315	16.75	23.714	13.75	23.089	13.63	46.774	16.70	22.903	13.60	23.714	13.75	46.666	16.69
2A	20	802.11a	5280-5320	99.015	19.96	100.000	20.00	98.401	19.93	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01
2C	20	802.11a	5500-5720	99.541	19.98	99.541	19.98	99.083	19.96	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01
3	20	802.11a	5745-5825	100.000	20.00	98.175	19.92	98.855	19.95	100.000	20.00	100.000	20.00	199.986	23.01	98.175	19.92	97.949	19.91	195.434	22.91
1	40	802.11n	5190-5230	84.140	19.25	83.042	19.19	82.224	19.15	40.022	16.02	42.170	16.25	82.224	19.15	41.486	16.18	40.504	16.08	82.035	19.14
2A	40	802.11n	5270-5310	96.962	19.87	99.106	19.86	98.175	19.92	89.125	19.50	88.308	19.46	177.419	22.49	87.862	19.44	83.664	19.22	171.396	22.34
2C	40	802.11n	5510-5710	97.275	19.88	96.405	19.84	99.083	19.96	89.125	19.50	89.125	19.50	178.238	22.51	88.818	19.49	89.125	19.50	176.198	22.46
3	40	802.11n	5750-5795	98.333	19.93	99.678	19.89	98.175	19.92	98.183	19.83	98.366	19.83	193.642	22.87	92.312	19.87	97.277	19.41	184.502	22.66
1	80	802.11ac	5210	27.416	14.38	27.850	14.42	27.071	14.33	22.382	13.50	21.518	13.33	43.853	16.42	22.952	13.43	21.762	13.38	43.853	16.42
2A	80	802.11ac	5290	39.174	15.93	38.744	15.88	38.230	15.82	26.959	14.31	27.283	14.36	54.200	17.34	27.378	14.37	28.184	14.50	55.590	17.45
2C	80	802.11ac	5630-5690	98.175	19.92	98.175	19.92	96.828	19.86	96.828	19.86	98.810	19.85	196.434	22.91	93.886	19.73	77.535	18.90	171.396	22.34
3	80	802.11ac	5775	73.282	18.65	73.282	18.65	74.131	18.70	65.917	18.19	66.222	18.21	132.130	21.21	65.118	18.14	64.834	18.12	130.017	21.14
1/2A	160	802.11ac	5250	16.904	12.25	17.783	12.50	17.539	12.44	15.631	11.94	15.824	11.91	31.189	14.94	15.560	11.92	15.688	11.95	31.261	14.95
1	20	802.11ax(SU)	5190-5240	47.315	16.75	47.315	16.75	47.315	16.75	23.714	13.75	23.089	13.63	46.774	16.70	22.903	13.60	23.714	13.75	46.666	16.69
2A	20	802.11ax(SU)	5280-5320	99.015	19.96	100.000	20.00	98.401	19.93	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01
2C	20	802.11ax(SU)	5500-5720	99.541	19.98	99.541	19.98	99.083	19.96	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01
3	20	802.11ax(SU)	5745-5825	100.000	20.00	98.175	19.92	98.855	19.95	100.000	20.00	100.000	20.00	199.986	23.01	98.175	19.92	97.949	19.91	195.434	22.91
1	40	802.11ax(SU)	5190-5230	84.140	19.25	84.140	19.25	82.985	19.19	42.170	16.25	40.701	16.10	82.794	19.18	41.553	16.19	40.383	16.06	81.846	19.13
2A	40	802.11ax(SU)	5270-5310	98.862	19.87	100.000	20.00	98.401	19.93	89.125	19.50	89.125	19.50	178.238	22.51	89.125	19.50	89.125	19.50	176.198	22.42
2C	40	802.11ax(SU)	5510-5710	94.776	19.77	98.243	19.92	97.724	19.90	85.645	19.33	89.125	19.50	174.582	22.42	89.125	19.50	86.876	19.39	174.985	22.43
3	40</																				

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary						CDD/SDM Diversity												
				Antenna WF5b		Antenna WF8		Antenna WF7		Antenna WF5b		Antenna WF8		Summed		Antenna WF8		Antenna WF7		Summed								
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)							
1A	20	2A	802.11a/n	5180-5240	47.315	16.75	47.315	16.75	47.315	16.75	23.714	13.75	23.714	13.75	47.244	16.76	23.714	13.75	23.442	13.70	47.206	16.74						
			802.11a/n	5260-5320	96.427	19.84	96.401	19.93	97.724	19.90	50.119	17.00	50.119	17.00	100.231	20.01	49.091	16.91	49.317	16.93	96.401	19.83						
			802.11a/n	5500-5720	100.000	20.00	100.000	20.00	99.541	19.98	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01						
		2A	40	3A	802.11a/n	5745-5825	98.742	19.95	98.855	19.85	98.628	19.94	98.855	19.95	97.949	19.91	195.284	22.92	98.851	19.94	98.175	19.92	198.789	22.94				
					802.11n	5190-5230	84.140	19.25	84.140	19.25	82.775	19.18	40.004	16.00	41.543	16.19	81.470	19.11	41.219	16.15	40.244	16.05	81.470	19.11				
					802.11n	5270-5310	97.499	19.89	99.586	19.98	98.383	19.84	89.125	19.50	87.297	19.41	176.604	22.47	86.576	19.37	81.059	19.09	167.494	22.24				
				1	80	2A	802.11ac	5290	30.479	14.84	31.160	14.84	31.427	14.97	24.149	13.83	25.119	14.00	49.317	16.93	25.119	14.00	25.119	14.00	50.234	17.01		
							802.11ac	5210	21.237	13.27	21.612	13.35	21.647	13.35	19.953	13.00	19.875	12.98	39.811	16.00	19.656	12.94	19.953	13.00	39.628	15.63		
							802.11ac	5530-5690	97.724	19.90	96.450	19.84	96.605	19.85	96.605	19.85	94.189	19.74	190.985	22.81	97.029	19.87	77.578	18.90	174.582	22.42		
						1A/2A	160	2A	802.11ac	5290	30.479	14.84	31.160	14.84	31.427	14.97	24.149	13.83	25.119	14.00	49.317	16.93	25.119	14.00	25.119	14.00	50.234	17.01
									802.11ac	5210	21.237	13.27	21.612	13.35	21.647	13.35	19.953	13.00	19.875	12.98	39.811	16.00	19.656	12.94	19.953	13.00	39.628	15.63
									802.11ac	5530-5690	97.724	19.90	96.450	19.84	96.605	19.85	96.605	19.85	94.189	19.74	190.985	22.81	97.029	19.87	77.578	18.90	174.582	22.42
1A/2A	40							3A	802.11ac	5775	66.574	18.22	66.574	18.22	66.222	18.21	58.884	17.70	58.210	17.65	117.220	20.69	59.183	17.72	59.566	17.75	118.850	20.75
									802.11ac	5250	15.495	11.90	15.849	12.00	15.776	11.98	12.445	10.95	12.359	10.92	24.831	13.95	12.303	10.90	12.388	10.93	24.717	13.93
									802.11ac (SU)	5180-5240	47.315	16.75	47.315	16.75	46.979	16.72	23.361	13.69	23.714	13.75	46.132	16.64	23.714	13.75	47.424	16.76	47.424	16.76
		1A/2A	20					2A	802.11ac (SU)	5260-5320	98.560	19.94	100.000	20.00	99.541	19.98	49.522	16.95	50.119	17.00	99.541	19.98	48.854	16.89	50.119	17.00	99.083	19.96
									802.11ac (SU)	5500-5720	99.977	20.00	99.380	19.87	98.401	19.83	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	49.317	16.93	98.855	19.95
									802.11ac (SU)	5745-5825	100.000	20.00	98.801	19.85	98.401	19.83	98.764	19.95	100.000	20.00	198.609	22.98	100.000	20.00	91.138	19.60	190.885	22.81
				1A/2A	40			3A	802.11ac (SU)	5190-5230	83.959	19.22	84.140	19.25	79.433	19.00	41.124	16.14	41.563	16.19	82.604	19.17	40.851	16.11	42.170	16.25	82.985	19.19
									802.11ac (SU)	5270-5310	94.776	19.77	97.185	19.88	97.499	19.89	85.408	19.34	89.125	19.50	174.965	22.43	89.125	19.50	89.125	19.50	178.238	22.51
									802.11ac (SU)	5755-5795	96.694	19.85	97.409	19.89	97.949	19.91	94.580	19.76	97.328	19.88	191.867	22.83	94.276	19.74	89.598	19.52	184.077	22.65
						1A/2A	80	2A	802.11ac (SU)	5210	21.508	13.33	22.387	13.50	21.478	13.32	15.927	11.99	15.028	11.77	30.832	14.89	15.531	11.91	15.733	11.97	31.261	14.95
									802.11ac (SU)	5290	24.485	13.89	23.858	13.78	24.116	13.82	21.913	13.41	22.208	13.47	44.137	16.45	21.832	13.39	22.592	13.43	44.055	16.44
									802.11ac (SU)	5530-5690	98.628	19.94	96.228	19.83	77.446	19.89	99.083	19.96	100.000	20.00	199.067	22.99	98.787	19.95	98.984	19.98	179.887	22.55
1A/2A	160							2A	802.11ac (SU)	5775	49.204	16.92	48.978	16.90	49.545	16.95	48.978	16.90	48.753	16.88	97.724	19.90	48.978	16.90	48.865	16.89	97.949	19.91
									802.11ac (SU)	5250	15.132	11.80	15.849	12.00	15.488	11.90	12.359	10.92	12.417	10.94	24.774	13.94	12.589	11.00	12.860	10.99	25.177	14.01

ISED EUT Overview (Mid Data Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD Primary						CDD Diversity												
				Antenna WF5b		Antenna WF8		Antenna WF7		Antenna WF5b		Antenna WF8		Summed		Antenna WF8		Antenna WF7		Summed								
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)							
1A	20	2A	802.11a/n	5180-5240	97.679	19.90	100.000	20.00	99.083	19.96	49.204	16.92	50.119	17.00	99.312	19.97	49.204	16.92	49.888	16.98	98.855	19.95						
			802.11a/n	5260-5320	99.015	19.96	100.000	20.00	99.312	19.97	49.978	16.90	50.119	17.00	99.083	19.96	49.317	16.93	49.331	16.94	98.855	19.95						
			802.11a/n	5500-5720	99.977	20.00	99.380	19.87	98.401	19.83	50.119	17.00	50.119	17.00	100.231	20.01	50.119	17.00	50.119	17.00	100.231	20.01						
		2A	40	3A	802.11a/n	5745-5825	98.424	19.93	98.175	19.92	98.855	19.95	98.855	19.95	97.949	19.91	195.284	22.92	98.770	19.99	97.949	19.91	197.697	22.96				
					802.11n	5190-5230	98.175	19.92	99.197	19.97	97.499	19.89	84.140	19.25	84.140	19.25	84.140	19.25	84.140	19.25	84.140	19.25	84.140	19.25				
					802.11n	5270-5310	96.605	19.85	100.000	20.00	96.605	19.85	76.489	18.84	75.736	18.79	152.055	21.82	75.980	18.81	77.822	18.91	153.815	21.87				
				1A	80	2A	802.11ac	5210	19.815	12.97	19.853	13.00	19.953	13.00	15.740	11.97	15.028	11.94	31.405	14.97	15.949	12.00	15.849	12.00	31.685	15.01		
							802.11ac	5290	28.035	14.48	28.184	14.50	27.227	14.35	22.387	13.50	21.943	13.41	44.361	16.47	21.154	13.25	22.050	13.43	43.251	16.36		
							802.11ac	5530-5690	97.275	19.88	97.275	19.88	96.828	19.86	97.275	19.88	96.828	19.86	194.089	22.88	97.387	19.89	98.401	19.93	195.884	22.92		
						1A/2A	160	2A	802.11ac	5775	52.481	17.20	52.723	17.22	51.523	17.12	49.091	16.98	49.659	16.96	98.855	19.95	49.329	16.93	50.119	17.00	99.541	19.98
									802.11ac	5250	13.842	11.41	13.665	11.36	13.868	11.42	11.220	10.50	11.143	10.47	22.387	13.50	11.066	10.44	11.117	10.46	22.182	13.46
									802.11ac (SU)	5180-5240	97.679	19.90	99.083	19.96	49.204	16.92	50.119	17.00	99.312	19.97	49.204	16.92	49.888	16.98	98.855	19.95		
1A/2A	20							2A	802.11ac (SU)	5260-5320	93.778	19.72	98.855	19.85	84.918	19.29	47.534	16.77	50.119	17.00	97.051	19.87	49.499	16.95	49.888	16.98	98.855	19.95
									802.11ac (SU)	5260-5320	93.886	19.73	100.000	20.00	93.753	19.23	48.865	16.89	50.119	17.00	98.855	19.95	50.119	17.00	50.119	17.00	100.231	20.01
									802.11ac (SU)	5500-5720	96.073	19.83	99.403	19.87	98.175	19.92	50.119	17.00	50.119	17.00	100.231	20.01	49.408	16.94	50.119	17.00	99.083	19.96
		1A/2A	40					3A	802.11ac (SU)	5745-5825	96.561	19.85	93.046	19.69	98.175	19.92	100.000	20.00	96.117	19.83	196.336	22.93	100.000	20.00	96.583	19.85	193.642	22.87
									802.11ac (SU)	5190-5230	88.573	19.47	86.696	19.38	87.498	19.42	73.131	18.64	71.812	18.56	144.877	21.41	73.030	18.64	74.451	18.64	145.211	21.62
									802.11ac (SU)	5270-5310	94.733	19.77	96.383	19.84	96.161	19.83	79.433	19.00	78.313	18.83	155.597	21.92	79.341	19.00	79.433	19.00	158.855	22.01
				1A/2A	80			2A	802.11ac (SU)	5210	19.815	12.97	19.853															

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG		Test Dates: 12/06/202 - 02/20/2024

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Tablet Device FCC ID: BCGA2836** and **IC: 579C-A2836**. The test data contained in this report pertains only to the emissions due to the EUT's UNII 802.11a/n/ac/ax(SU) transmitter.

Test Device Serial No.: C424JG6V2Q, C4CV3H0HPL, N573DXQ0W, DLXH1600004000065V

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), 802.11a/ax WIFI 6E, NB UNII (1x, HDR4, HDR8), WPT, 802.15.4

This device supports BT Beamforming

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac / 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11n / 802.11ac / 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ac / 802.11ax (80MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	50	5250	114	5570

Table 2-4. 802.11ac / 802.11ax (160MHz BW) Frequency / Channel Operations

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device		Page 6 of 595

Notes:

- 5GHz NII operation is possible in 20MHz, 40MHz, 80MHz and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles						
802.11 Mode/Band		Duty Cycle [%]				
		Antenna WF5	Antenna WF8	Antenna WF7	CDD (Primary)	CDD (Diversity)
5GHz	a (Low Rate)	98.10	98.00	98.30	97.20	97.60
	a (Mid Rate)	94.60	94.40	94.50	93.50	93.20
	a (High Rate)	90.30	90.10	90.30	89.90	89.56
	n (HT20) (Low Rate)	96.38	95.94	96.38	93.97	93.76
	n (HT20) (Mid Rate)	93.76	92.04	93.76	89.13	89.54
	n (HT20) (High Rate)	89.95	85.70	90.57	85.11	85.11
	ax(SU) (HE20 Low Rate)	95.28	96.61	95.50	95.50	95.50
	ax(SU) (HE20 Mid Rate)	92.68	93.76	92.90	92.90	92.68
	ax(SU) (HE20 High Rate)	86.50	90.36	86.10	86.30	86.10
	n (HT40 Low Rate)	96.16	96.38	96.61	93.76	93.11
	n (HT40 Mid Rate)	93.54	93.33	93.54	89.54	88.92
	n (HT40 High Rate)	90.36	90.78	90.57	85.11	84.72
	ax(SU) (HE40 Low Rate)	95.50	95.50	95.72	95.50	95.72
	ax(SU) (HE40 Mid Rate)	92.90	92.26	92.47	92.04	92.90
	ax(SU) (HE40 High Rate)	86.10	85.51	86.30	85.70	86.30
	ac (HT80 Low Rate)	96.16	96.16	95.50	93.11	92.47
	ac (HT80 Mid Rate)	93.33	92.68	93.33	88.10	88.72
	ac (HT80 High Rate)	86.70	86.90	86.90	82.41	81.28
	ax(SU) (HE80 Low Rate)	95.06	95.28	94.84	94.84	95.50
	ax(SU) (HE80 Mid Rate)	92.04	91.41	92.04	92.04	91.83
	ax(SU) (HE80 High Rate)	85.31	85.11	85.11	85.70	85.11
	ac (HT160 Low Rate)	94.62	94.41	94.62	91.20	90.99
	ac (160 Mid Rate)	90.57	90.99	90.78	86.10	85.70
	ac (H160 High Rate)	85.31	84.92	84.33	79.43	80.35
ax(SU) (HE160 Low Rate)	93.76	94.19	94.19	93.97	93.97	
ax(SU) (HE160 Mid Rate)	90.57	90.16	90.16	89.95	90.36	
ax(SU) (HE160 High Rate)	85.31	83.37	83.37	84.14	84.14	

Table 2-5. Measured Duty Cycles

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 7 of 595

2. The device employs CDD/SDM technology. Below are the possible configurations.

WiFi Configurations	SISO			Primary						Diversity					
	Antenna WFSB	Antenna WF8	Antenna WF7	CDD		SDM		STBC		CDD		SDM		STBC	
				Antenna WFSB	Antenna WF8	Antenna WFSB	Antenna WF8	Antenna WFSB	Antenna WF8	Antenna WFSB	Antenna WF8	Antenna WFSB	Antenna WF7	Antenna WFSB	Antenna WF7
5GHz	11a	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11n (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU)(20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11n (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU)(40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ac (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU)(80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ac (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU)(160MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-6. WiFi Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO CDD function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)

6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)

13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)

29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325, 351/390, 390/433.3 (ac – 80MHz BW)

13/14.4, 26.28.9, 39/43.3, 52/57.8, 78/86.7, 104/115.6, 117/130, 130/144.4Mbps (MIMO CDD n/ac – 20MHz)

156/173Mbps (MIMO CDD ac – 20MHz)

27/30, 54/60, 81/90, 108/120, 162/180, 216/240, 243,270, 270/300Mbps (MIMO CDD n/ac – 40MHz)

324/360, 360/400Mbps (MIMO CDD ac – 40MHz)

58.5/65, 117/130, 175.5/195, 234/260, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7Mbps (MIMO CDD ac – 80MHz)

116/130, 234/260, 351/390, 468/520, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7 (MIMO ac – 160MHz)

8/8.6, 16/17.2, 24/25.8, 33/34.4, 49/51.6, 65/68.8, 73/77.4, 81/86.0, 98/103.2, 108/114.7, 122/129.0, 135/143.4 (ax – 20MHz)

16/17.2, 33/34.4, 49/51.6, 65/68.8, 98/103.2, 130/137.6, 146/154.9, 163/172.1, 195/206.5, 217/229.4, 244/258.1, 271/286.8 (ax – 40MHz BW)

34/36.0, 68/72.1, 102/108.1, 136/144.1, 204/216.2, 272/288.2, 306/324.4, 340/360.3, 408/432.4, 453/480.4, 510/540.4, 567/600.5 (ax – 80MHz BW)

136.2/144.2, 272/288.2, 408.2/432.4, 544.4, 576.4/816.6864.8, 1088.8/1153, 1225/1297, 1361.2/1441.2, 1633.4/1729.4, 1814.8/1921.6, 2041.6/2161.8, 2268.6/2402Mbps, (MIMO ax – 160MHz)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 8 of 595

3. This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8
WF8	Config 1	✓	✗	✗	✗	✗	✓
WF8	Config 2	✗	✓	✗	✓	✗	✗
WF8	Config 3	✗	✓	✗	✗	✓	✗
WF8	Config 4	✗	✗	✓	✓	✗	✗
WF8	Config 5	✗	✗	✓	✗	✓	✗
WF7	Config 6	✓	✗	✗	✗	✗	✓
WF7	Config 7	✗	✓	✗	✓	✗	✗
WF7	Config 8	✗	✓	✗	✗	✓	✗
WF7	Config 9	✗	✗	✓	✓	✗	✗
WF7	Config 10	✗	✗	✓	✗	✓	✗

Table 2-7. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) - BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

TWDR Channels are not supported for ISED.

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)		
	Antenna WF5b	Antenna WF8	Antenna WF7
5.150 - 5.250	1.5	1.7	-0.2
5.250 - 5.350	1.8	0.7	-0.4
5.470 - 5.725	1.9	1.2	2.7
5.725 - 5.850	2.0	0.8	1.9

Table 2-8. Highest Antenna Gain

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 9 of 595

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNP0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-9. Test Support Equipment List

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst-case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11n HT20/40, 11ax(SU) HE20/40/80/160 and acVHT80/160 2TX CDD/SDM mode test data provided in this report covers 802.11n HT20/40, 11ax(SU) HE20/40/80/160 and 802.11acVHT80/160 2TX STBC mode

802.11ac VHT20 and VHT40 mode are different from 802.11n HT20 and HT40 only in control messages and have the same power settings.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 10 of 595

V 10.5 12/15/2021

The data rates have been classified into three different groups; low data rate, middle data rate, and high data rate. All three groups of data rate have been investigated and only the worst case data rate per group is reported. The worst case data rate for each group per mode are as follows:

- 802.11a:
 - Low Data Rate: 12Mbps
 - Mid Data Rate: 24Mbps
 - High Data Rate: 54Mbps
- 802.11n HT20/40:
 - Low Data Rate: MCS2/MCS10(SISO/CDD/SDM)
 - Mid Data Rate: MCS4/MCS12(SISO/CDD/SDM)
 - High Data Rate: MCS7/MCS15(SISO/CDD/SDM)
- 802.11ac VHT80/160:
 - Low Data Rate: MCS2(SISO/CDD/SDM)
 - Mid Data Rate: MCS4(SISO/CDD/SDM)
 - High Data Rate: MCS9(SISO/CDD/SDM)
- 802.11ax(SU) HE20/HE40/HE80/HE160
 - Low Data Rate: MCS2(SISO/CDD/SDM)
 - Mid Data Rate: MCS4(SISO/CDD/SDM)
 - High Data Rate: MCS11(SISO/CDD/SDM)

For 802.11ax-RU test result, see separate UNII 802.11ax (OFDMA) report, 1C2311270067-12.BCG

2.6 Software and Firmware

The test was conducted with firmware version 21E8197 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 11 of 595

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device Page 12 of 595

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG		Test Dates: 12/06/202 - 02/20/2024

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2836 IC: 579C-A2836	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 14 of 595

V 10.5 12/15/2021

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 15 of 595

V 10.5 12/15/2021

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/10/2023	Annual	3/10/2024	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	6/8/2023	Annual	6/8/2024	192052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 16 of 595

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2836
 IC: 579C-A2836
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		PASS	Section 7.2, 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report	RADIATED	PASS	See DFS Test Report (1C23112700 67-10.BCG)
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])		PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.6.23
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “UNII Automation,” Version 7.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.0.0.
- 6) Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 17 of 595

7.2 26dB & 99% Bandwidth Measurement – 802.11a/n/ac/ax(SU)

§2.1049; §15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates were investigated and only the worst case are reported.
2. The data rates have been classified into three different groups; Low Data Rate, middle rate, and High Data Rate. All three data rate groups of data rate have been investigated and only the worst case data rate per group is reported.
3. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel bandwidth plots have been reported.

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 18 of 595

V 10.5 12/15/2021

7.2.1 Antenna WF5b 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	19.5/21.7 (MCS2)	17.78	21.29
	5200	40	n (20MHz)	19.5/21.7 (MCS2)	17.67	20.70
	5240	48	n (20MHz)	19.5/21.7 (MCS2)	17.69	20.71
	5180	36	ax (SU) (20MHz)	24/25.8 (MCS2)	19.08	21.82
	5200	40	ax (SU) (20MHz)	24/25.8 (MCS2)	19.00	20.97
	5240	48	ax (SU) (20MHz)	24/25.8 (MCS2)	19.00	21.12
	5190	38	n (40MHz)	40/40.5 (MCS2)	36.52	42.07
	5230	46	n (40MHz)	40/40.5 (MCS2)	36.23	40.89
	5190	38	ax (SU) (40MHz)	49/51.6 (MCS2)	38.02	44.41
	5230	46	ax (SU) (40MHz)	49/51.6 (MCS2)	37.92	41.44
	5210	42	ac (80MHz)	87.8/97.5 (MCS2)	75.59	83.68
5210	42	ax (SU) (80MHz)	102/108.1 (MCS2)	77.19	82.81	
Band 1/2	5250	50	ac (160MHz)	87.8/97.5 (MCS2)	153.92	163.44
	5250	50	ax (SU) (160MHz)	102/108.1 (MCS2)	156.32	164.53
Band 2A	5260	52	n (20MHz)	19.5/21.7 (MCS2)	17.68	20.84
	5300	60	n (20MHz)	19.5/21.7 (MCS2)	17.68	20.84
	5320	64	n (20MHz)	19.5/21.7 (MCS2)	17.77	21.27
	5260	52	ax (SU) (20MHz)	24/25.8 (MCS2)	18.99	20.83
	5300	60	ax (SU) (20MHz)	24/25.8 (MCS2)	19.02	21.24
	5320	64	ax (SU) (20MHz)	24/25.8 (MCS2)	19.06	23.07
	5270	54	n (40MHz)	40/40.5 (MCS2)	36.27	41.19
	5310	62	n (40MHz)	40/40.5 (MCS2)	36.47	41.50
	5270	54	ax (SU) (40MHz)	49/51.6 (MCS2)	37.91	41.21
	5310	62	ax (SU) (40MHz)	49/51.6 (MCS2)	37.98	45.16
	5290	58	ac (80MHz)	87.8/97.5 (MCS2)	75.57	83.84
	5290	58	ax (SU) (80MHz)	102/108.1 (MCS2)	77.20	83.80
	Band 2C	5500	100	n (20MHz)	19.5/21.7 (MCS2)	17.73
5580		116	n (20MHz)	19.5/21.7 (MCS2)	17.69	20.82
5720		144	n (20MHz)	19.5/21.7 (MCS2)	17.70	20.83
5500		100	ax (SU) (20MHz)	24/25.8 (MCS2)	19.04	21.86
5580		116	ax (SU) (20MHz)	24/25.8 (MCS2)	19.00	20.97
5720		144	ax (SU) (20MHz)	24/25.8 (MCS2)	18.99	21.24
5510		102	n (40MHz)	40/40.5 (MCS2)	36.37	41.97
5550		110	n (40MHz)	40/40.5 (MCS2)	36.25	41.25
5710		142	n (40MHz)	40/40.5 (MCS2)	36.19	40.65
5510		102	ax (SU) (40MHz)	49/51.6 (MCS2)	38.01	44.07
5550		110	ax (SU) (40MHz)	49/51.6 (MCS2)	37.97	41.25
5710		142	ax (SU) (40MHz)	49/51.6 (MCS2)	37.89	41.37
5530		106	ac (80MHz)	87.8/97.5 (MCS2)	75.64	87.35
5690		138	ac (80MHz)	87.8/97.5 (MCS2)	75.33	81.07
5530		106	ax (SU) (80MHz)	102/108.1 (MCS2)	77.21	83.03
5690		138	ax (SU) (80MHz)	102/108.1 (MCS2)	77.15	81.48
5570		114	ac (160MHz)	87.8/97.5 (MCS2)	154.11	163.91
5570	114	ax (SU) (160MHz)	102/108.1 (MCS2)	156.27	165.20	

Table 7-2. Conducted Bandwidth Measurements Antenna WF5b (Low Data Rate)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 19 of 595

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	39/43.3 (MCS4)	17.75	21.07
	5200	40	n (20MHz)	39/43.3 (MCS4)	17.70	20.64
	5240	48	n (20MHz)	39/43.3 (MCS4)	17.67	20.93
	5180	36	ax (SU) (20MHz)	49/51.6 (MCS4)	19.06	21.26
	5200	40	ax (SU) (20MHz)	49/51.6 (MCS4)	19.00	21.09
	5240	48	ax (SU) (20MHz)	49/51.6 (MCS4)	19.04	21.11
	5190	38	n (40MHz)	81/90 (MCS4)	36.44	41.41
	5230	46	n (40MHz)	81/90 (MCS4)	36.23	40.56
	5190	38	ax (SU) (40MHz)	98/103.2 (MCS4)	38.12	47.99
	5230	46	ax (SU) (40MHz)	98/103.2 (MCS4)	37.91	40.82
	5210	42	ac (80MHz)	175.5/195 (MCS4)	75.52	81.01
Band 1/2	5210	42	ax (SU) (80MHz)	204/216.2 (MCS4)	77.21	82.13
	5250	50	ax (SU) (160MHz)	175.5/195 (MCS4)	154.26	163.79
Band 2A	5250	50	ax (SU) (160MHz)	204/216.2 (MCS4)	156.16	164.25
	5260	52	n (20MHz)	39/43.3 (MCS4)	17.69	20.80
	5300	60	n (20MHz)	39/43.3 (MCS4)	17.68	20.52
	5320	64	n (20MHz)	39/43.3 (MCS4)	17.76	21.07
	5260	52	ax (SU) (20MHz)	49/51.6 (MCS4)	19.04	20.79
	5300	60	ax (SU) (20MHz)	49/51.6 (MCS4)	19.01	21.08
	5320	64	ax (SU) (20MHz)	49/51.6 (MCS4)	19.03	22.00
	5270	54	n (40MHz)	81/90 (MCS4)	36.26	40.84
	5310	62	n (40MHz)	81/90 (MCS4)	36.35	41.50
	5270	54	ax (SU) (40MHz)	98/103.2 (MCS4)	37.88	40.85
	5310	62	ax (SU) (40MHz)	98/103.2 (MCS4)	38.12	59.88
	5290	58	ac (80MHz)	175.5/195 (MCS4)	75.60	81.35
	5290	58	ax (SU) (80MHz)	204/216.2 (MCS4)	77.20	81.33
	Band 2C	5500	100	n (20MHz)	39/43.3 (MCS4)	17.80
5580		116	n (20MHz)	39/43.3 (MCS4)	17.71	20.61
5720		144	n (20MHz)	39/43.3 (MCS4)	17.65	20.68
5500		100	ax (SU) (20MHz)	49/51.6 (MCS4)	19.04	21.41
5580		116	ax (SU) (20MHz)	49/51.6 (MCS4)	19.01	21.14
5720		144	ax (SU) (20MHz)	49/51.6 (MCS4)	19.02	21.04
5510		102	n (40MHz)	81/90 (MCS4)	36.31	43.41
5550		110	n (40MHz)	81/90 (MCS4)	36.24	40.71
5710		142	n (40MHz)	81/90 (MCS4)	36.23	40.37
5510		102	ax (SU) (40MHz)	98/103.2 (MCS4)	38.03	55.61
5550		110	ax (SU) (40MHz)	98/103.2 (MCS4)	37.92	41.19
5710		142	ax (SU) (40MHz)	98/103.2 (MCS4)	37.87	40.95
5530		106	ac (80MHz)	175.5/195 (MCS4)	75.61	80.95
5690		138	ac (80MHz)	175.5/195 (MCS4)	75.41	80.68
5530		106	ax (SU) (80MHz)	204/216.2 (MCS4)	77.32	81.42
5690		138	ax (SU) (80MHz)	204/216.2 (MCS4)	77.22	81.62
5570		114	ac (160MHz)	175.5/195 (MCS4)	154.19	162.91
5570		114	ax (SU) (160MHz)	204/216.2 (MCS4)	156.12	164.45


Table 7-3. Conducted Bandwidth Measurements Antenna WF5b (Mid Data Rate)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 20 of 595


	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	65/72.2 (MCS7)	17.79	20.74
	5200	40	n (20MHz)	65/72.2 (MCS7)	17.79	21.10
	5240	48	n (20MHz)	65/72.2 (MCS7)	17.82	20.87
	5180	36	ax (SU) (20MHz)	135/143.4 (MCS11)	19.05	20.95
	5200	40	ax (SU) (20MHz)	135/143.4 (MCS11)	19.03	21.09
	5240	48	ax (SU) (20MHz)	135/143.4 (MCS11)	19.00	20.97
	5190	38	n (40MHz)	135/150 (MCS7)	36.52	41.16
	5230	46	n (40MHz)	135/150 (MCS7)	36.62	41.14
	5190	38	ax (SU) (40MHz)	271/286 (MCS11)	37.96	44.18
	5230	46	ax (SU) (40MHz)	271/286 (MCS11)	37.97	44.06
	5210	42	ac (80MHz)	390/433.3 (MCS9)	75.96	81.64
Band 1/2	5210	42	ax (SU) (80MHz)	567/600.5 (MCS11)	77.07	81.08
	5250	50	ac (160MHz)	390/433.3 (MCS9)	155.03	165.12
Band 2A	5250	50	ax (SU) (160MHz)	567/600.5 (MCS11)	156.73	243.28
	5260	52	n (20MHz)	65/72.2 (MCS7)	17.81	20.88
	5300	60	n (20MHz)	65/72.2 (MCS7)	17.83	20.98
	5320	64	n (20MHz)	65/72.2 (MCS7)	17.79	20.71
	5260	52	ax (SU) (20MHz)	135/143.4 (MCS11)	18.99	21.02
	5300	60	ax (SU) (20MHz)	135/143.4 (MCS11)	19.02	21.10
	5320	64	ax (SU) (20MHz)	135/143.4 (MCS11)	19.00	20.89
	5270	54	n (40MHz)	135/150 (MCS7)	36.58	41.18
	5310	62	n (40MHz)	135/150 (MCS7)	36.45	41.09
	5270	54	ax (SU) (40MHz)	271/286 (MCS11)	37.96	44.32
	5310	62	ax (SU) (40MHz)	271/286 (MCS11)	37.91	44.42
	5290	58	ac (80MHz)	390/433.3 (MCS9)	76.12	82.34
	5290	58	ax (SU) (80MHz)	567/600.5 (MCS11)	77.19	81.25
	Band 2C	5500	100	n (20MHz)	65/72.2 (MCS7)	17.76
5580		116	n (20MHz)	65/72.2 (MCS7)	17.83	20.96
5720		144	n (20MHz)	65/72.2 (MCS7)	17.84	20.88
5500		100	ax (SU) (20MHz)	135/143.4 (MCS11)	19.04	20.96
5580		116	ax (SU) (20MHz)	135/143.4 (MCS11)	19.03	20.93
5720		144	ax (SU) (20MHz)	135/143.4 (MCS11)	19.04	21.17
5510		102	n (40MHz)	135/150 (MCS7)	36.53	41.35
5550		110	n (40MHz)	135/150 (MCS7)	36.52	41.14
5710		142	n (40MHz)	135/150 (MCS7)	36.52	41.30
5510		102	ax (SU) (40MHz)	271/286 (MCS11)	37.84	41.02
5550		110	ax (SU) (40MHz)	271/286 (MCS11)	37.91	44.33
5710		142	ax (SU) (40MHz)	271/286 (MCS11)	37.93	44.31
5530		106	ac (80MHz)	390/433.3 (MCS9)	76.06	81.98
5690		138	ac (80MHz)	390/433.3 (MCS9)	75.95	82.48
5530		106	ax (SU) (80MHz)	567/600.5 (MCS11)	77.24	81.53
5690		138	ax (SU) (80MHz)	567/600.5 (MCS11)	77.03	81.20
5570		114	ac (160MHz)	390/433.3 (MCS9)	155.16	163.96
5570		114	ax (SU) (160MHz)	567/600.5 (MCS11)	156.46	166.37

Table 7-4. Conducted Bandwidth Measurements Antenna WF5b (High Data Rate)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 21 of 595

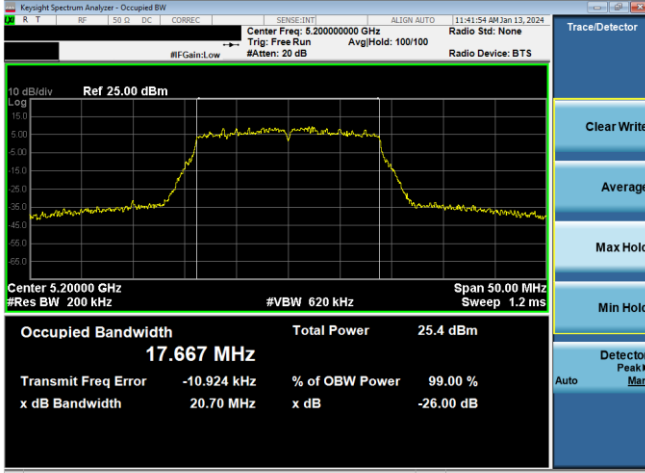

Plot 7-1. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 40, MCS2)

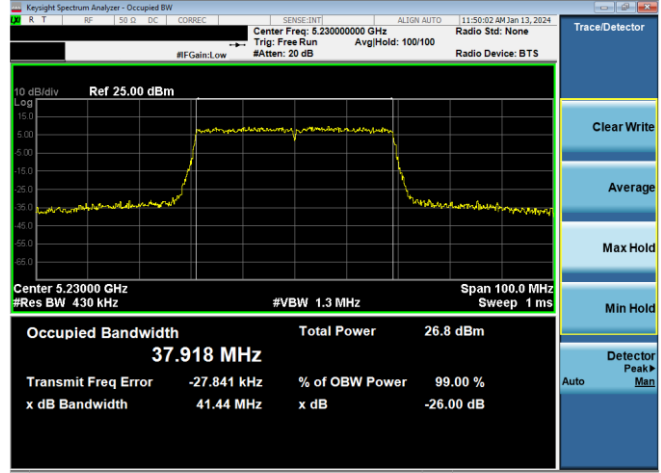


Plot 7-4. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 46, MCS2)

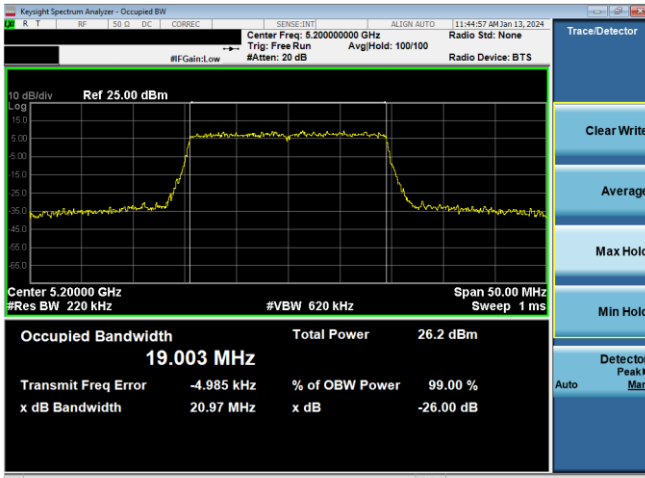


Plot 7-2. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 40, MCS2)



Plot 7-5. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 42, MCS2)

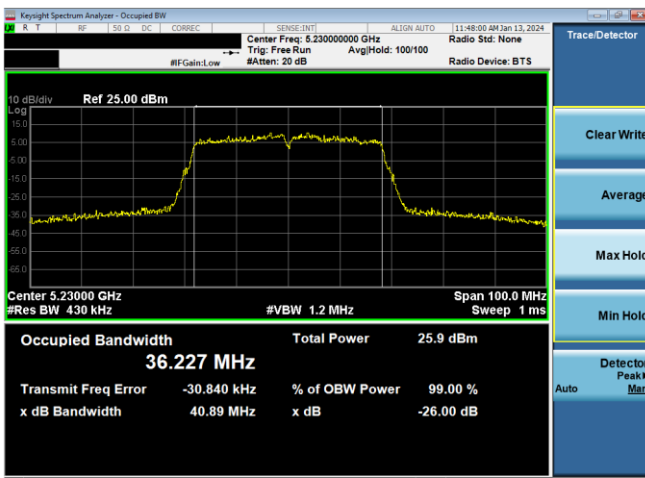


Plot 7-3. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 46, MCS2)

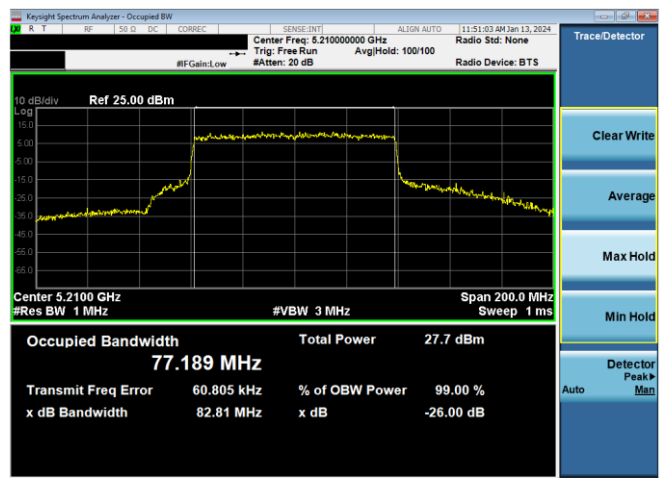


Plot 7-6. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 42, MCS2)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 22 of 595

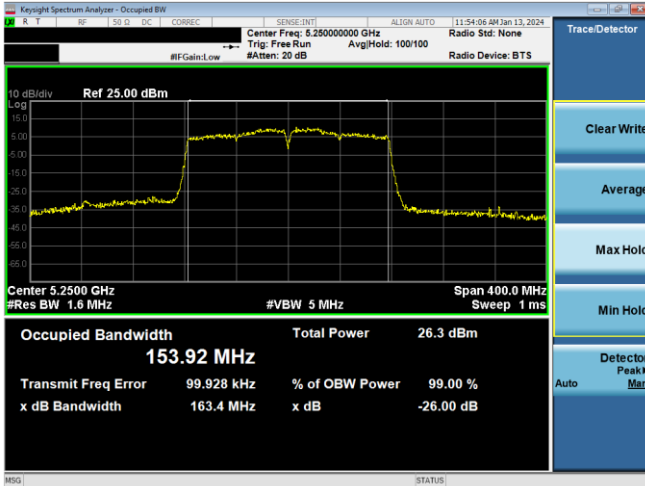


Plot 7-7. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 50, MCS2)

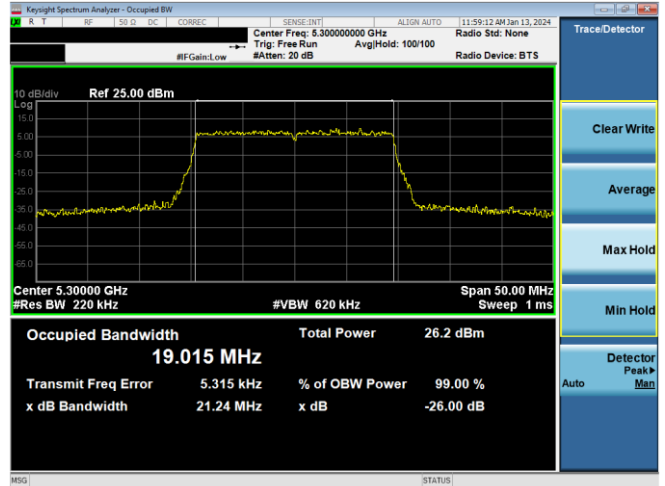


Plot 7-10. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 60, MCS2)




Plot 7-8. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 50, MCS2)

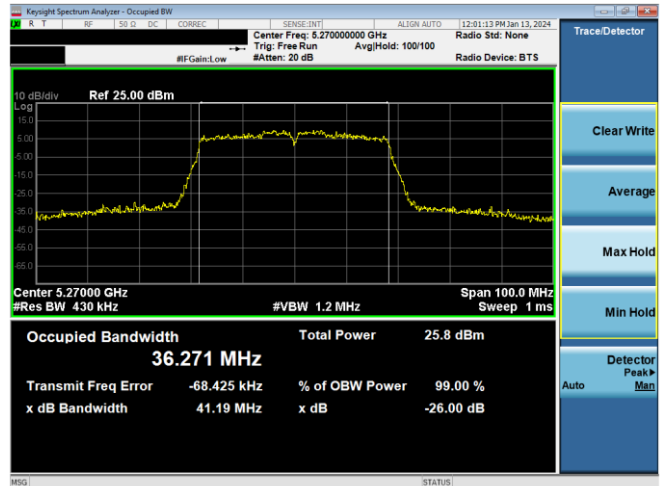

Plot 7-11. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 54, MCS2)

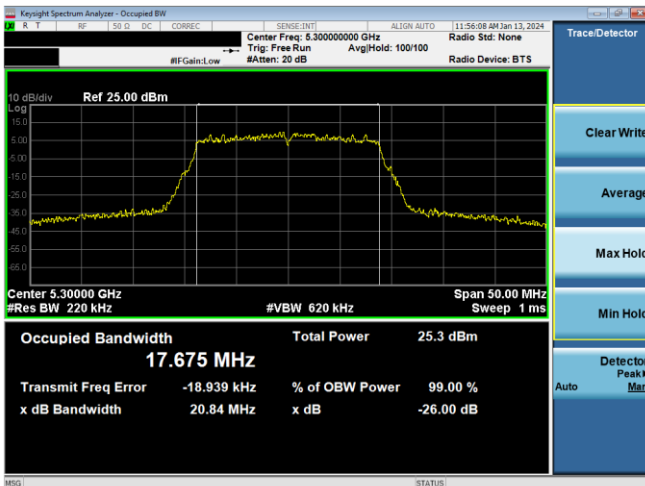


Plot 7-9. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 60, MCS2)

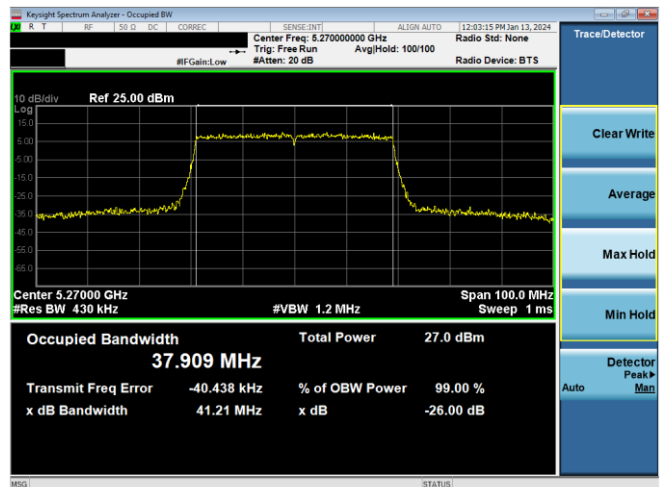


Plot 7-12. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 54, MCS2)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 23 of 595

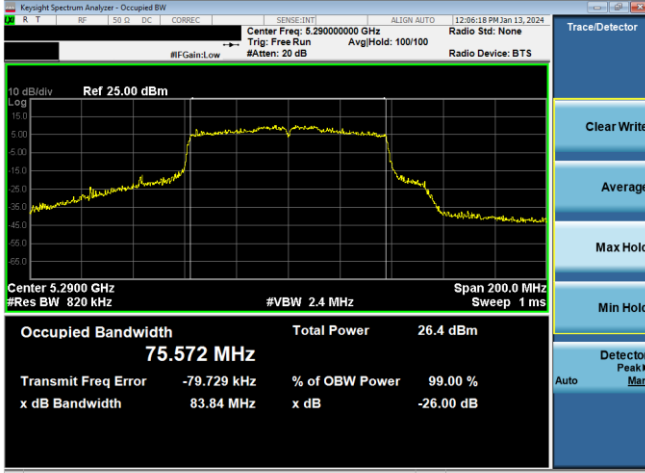


Plot 7-13. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 58, MCS2)

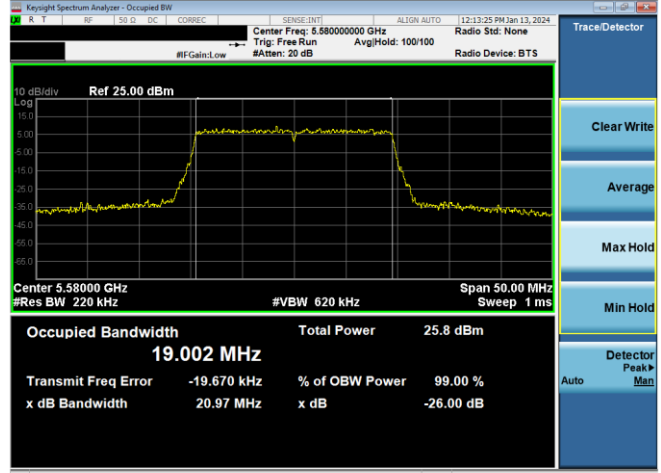


Plot 7-16. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 116, MCS2)




Plot 7-14. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 58, MCS2)

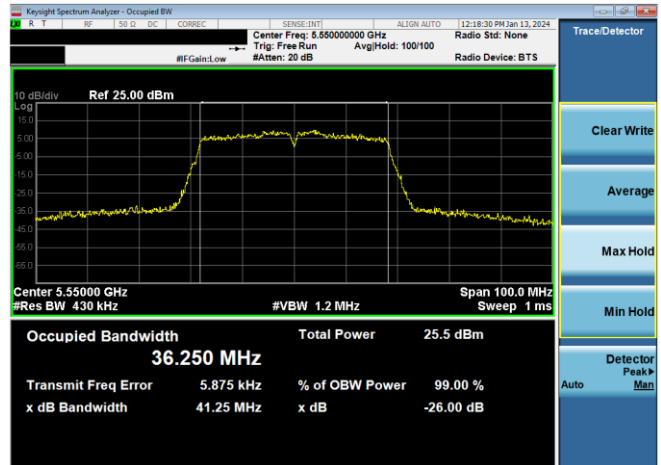

Plot 7-17. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 110, MCS2)

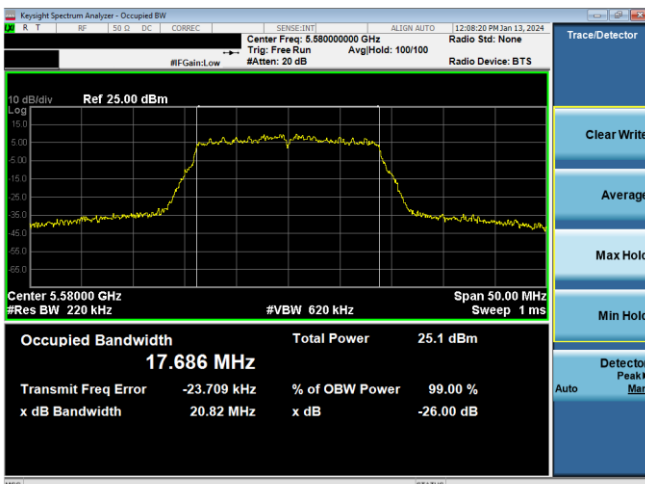


Plot 7-15. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 116, MCS2)

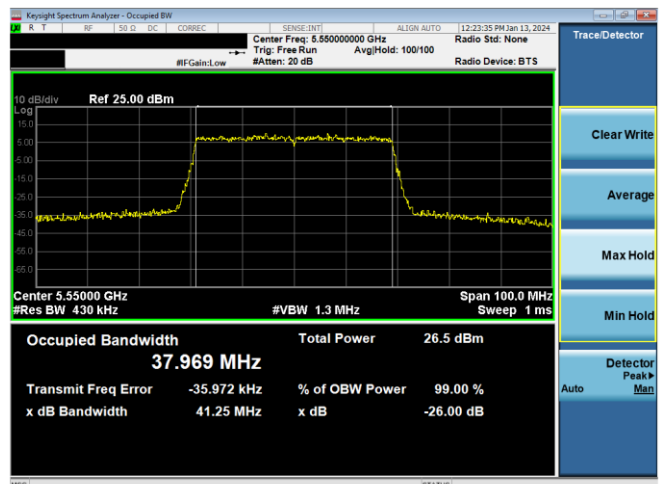


Plot 7-18. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 110, MCS2)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 24 of 595

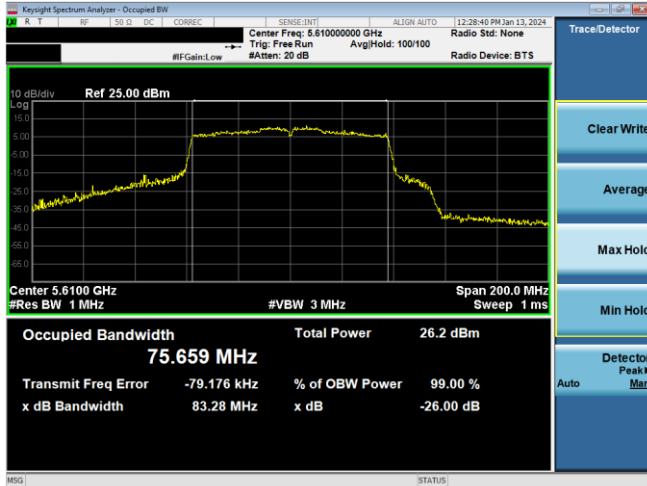


Plot 7-19. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 122, MCS2)

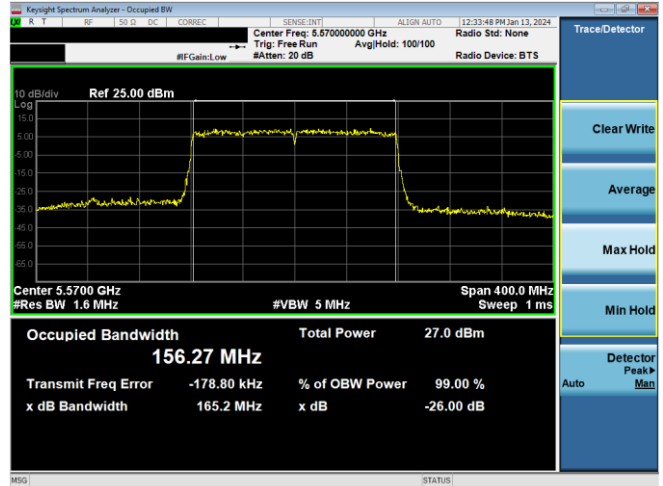

Plot 7-22. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 114, MCS2)

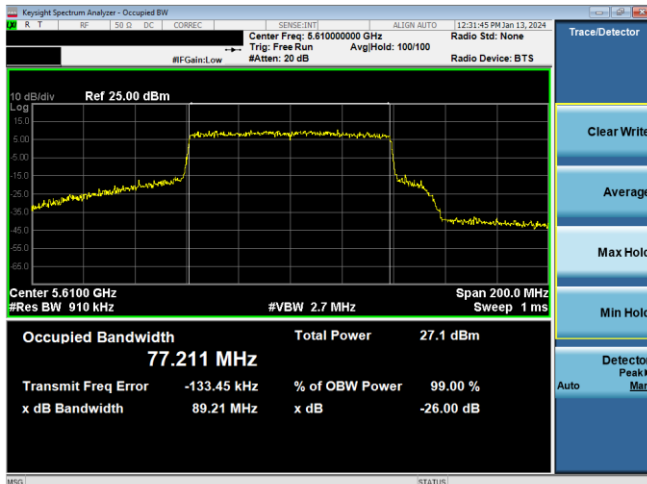


Plot 7-20. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 122, MCS2)

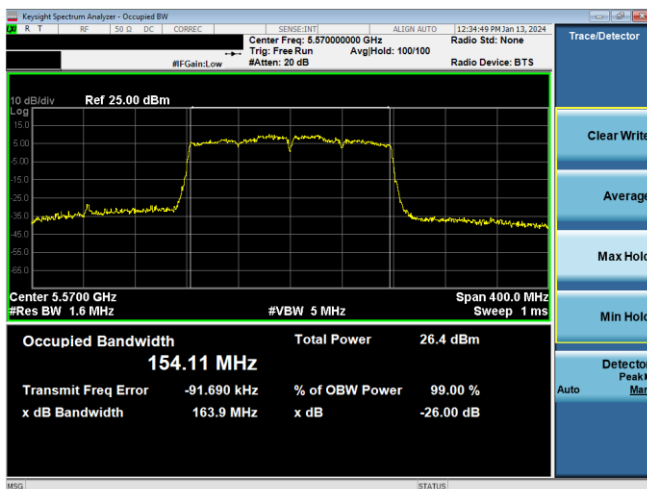


Plot 7-21. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 114, MCS2)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 25 of 595

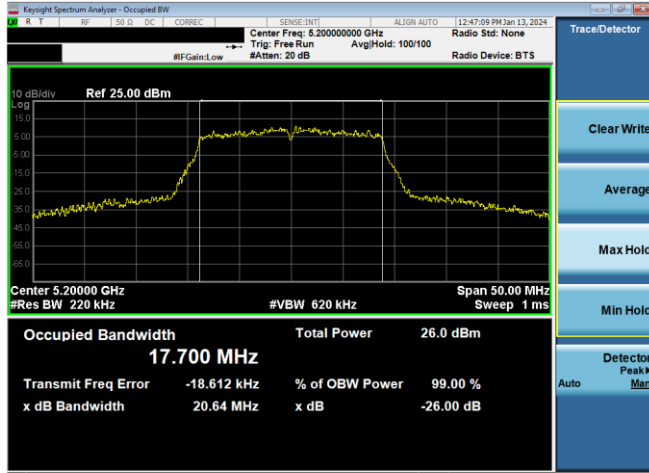


Plot 7-23. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 40, MCS4)

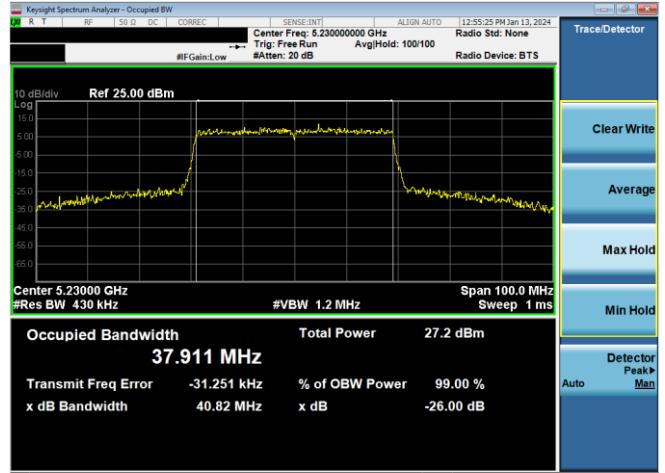

Plot 7-26. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 46, MCS4)

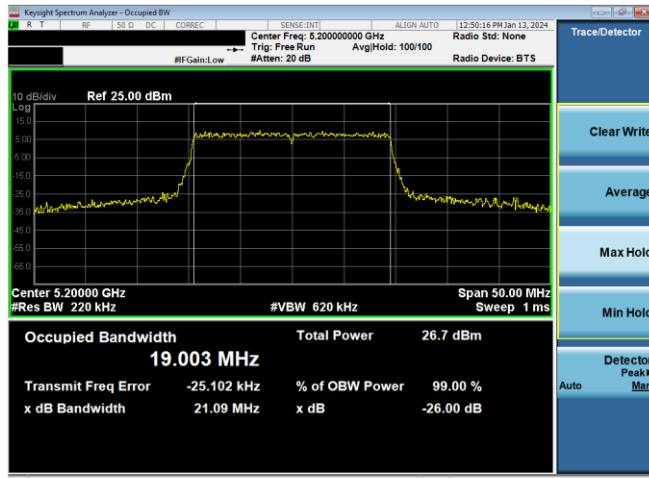

Plot 7-24. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 40, MCS4)

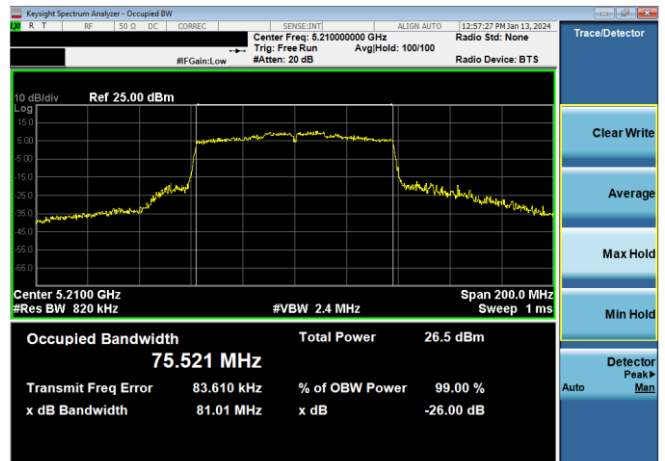

Plot 7-27. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 42, MCS4)




Plot 7-25. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 46, MCS4)




Plot 7-28. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 42, MCS4)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 26 of 595

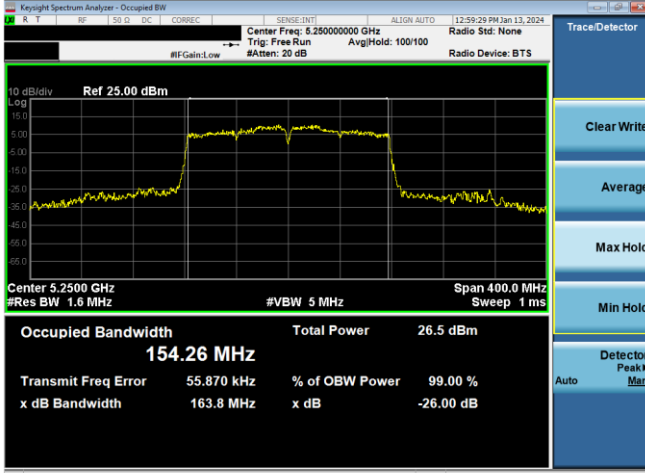

Plot 7-29. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 50, MCS4)

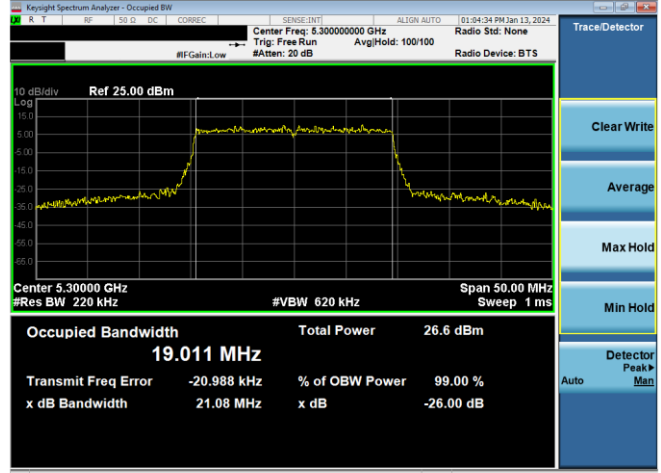


Plot 7-32. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 60, MCS4)

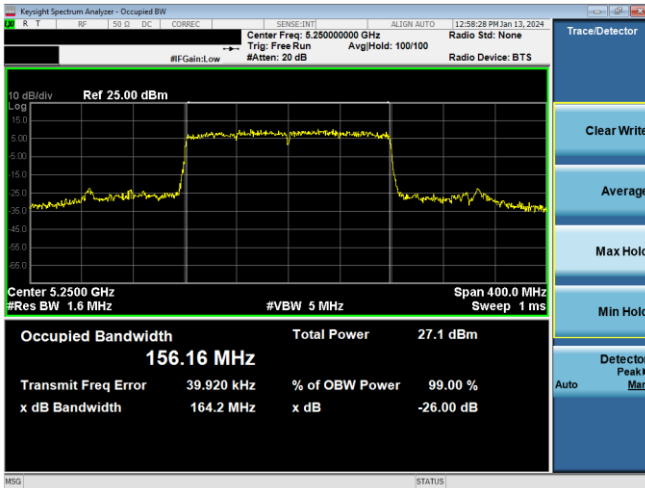


Plot 7-30. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 50, MCS4)



Plot 7-33. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 54, MCS4)

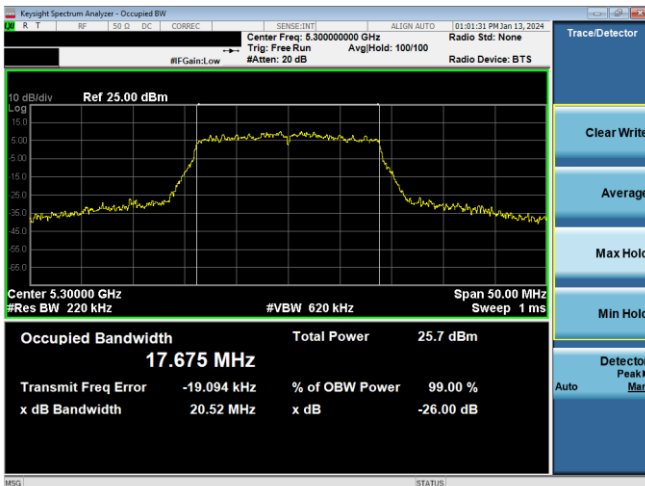


Plot 7-31. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 60, MCS4)

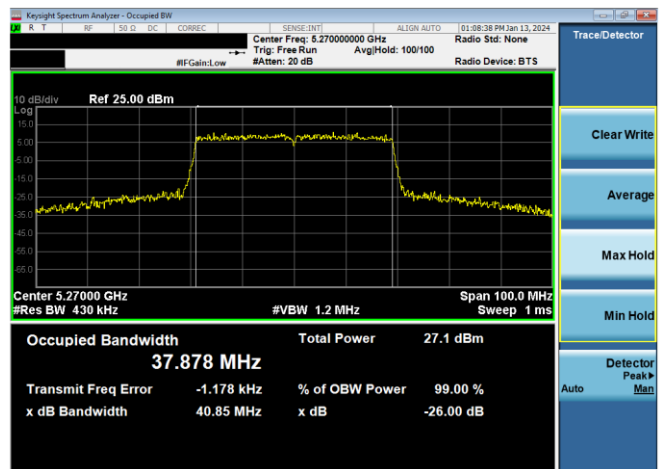


Plot 7-34. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 54, MCS4)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 27 of 595

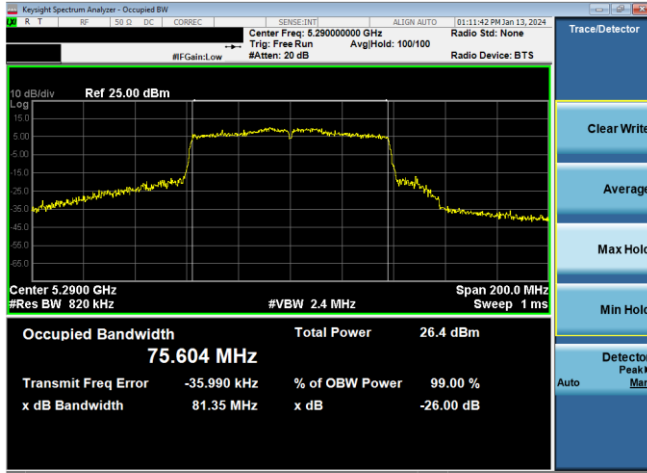


Plot 7-35. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 58, MCS4)

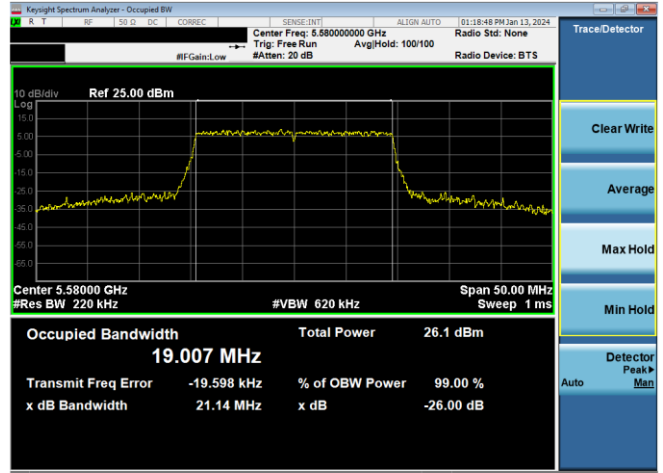

Plot 7-38. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 116, MCS4)




Plot 7-36. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 58, MCS4)

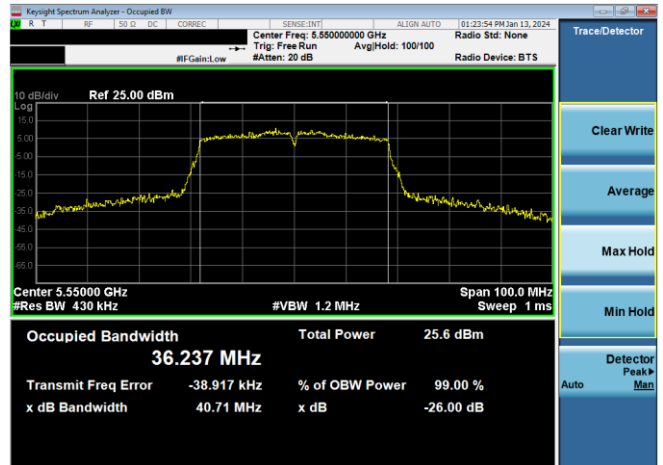

Plot 7-39. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 110, MCS4)




Plot 7-37. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 116, MCS4)

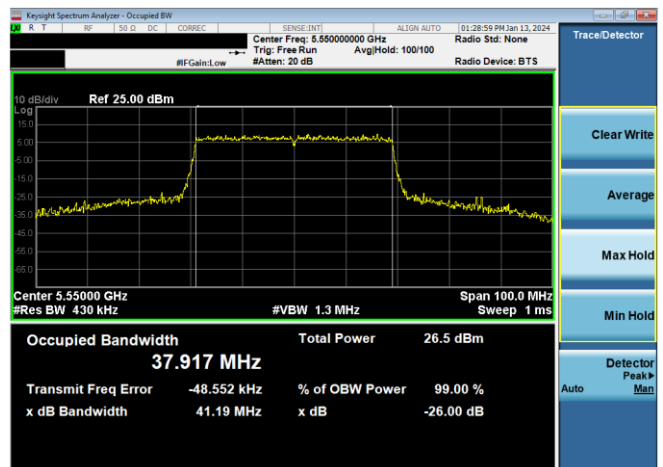


Plot 7-40. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 110, MCS4)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 28 of 595

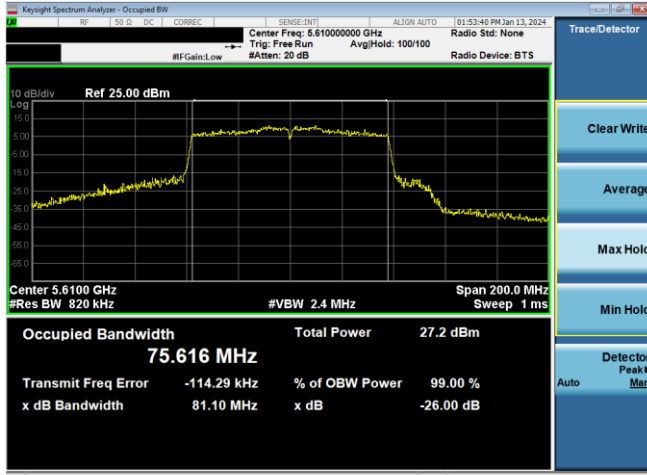

Plot 7-41. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 122, MCS4)

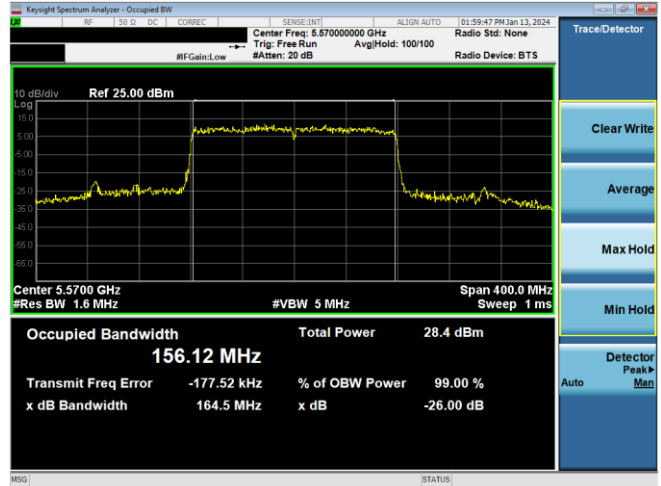

Plot 7-44. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 114, MCS4)




Plot 7-42. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 122, MCS4)




Plot 7-43. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 114, MCS4)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 29 of 595

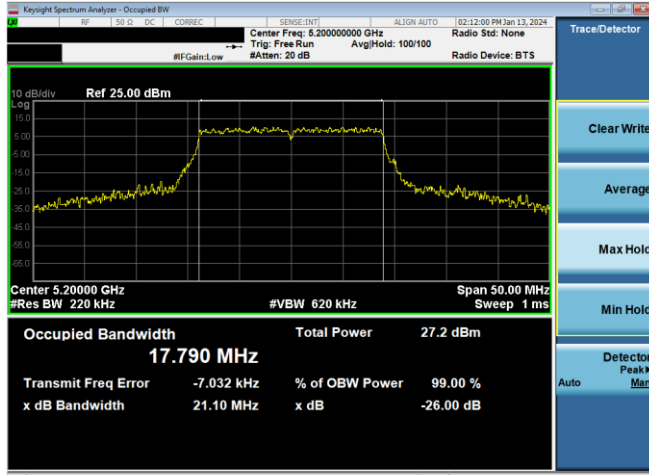


Plot 7-45. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 40, MCS7)

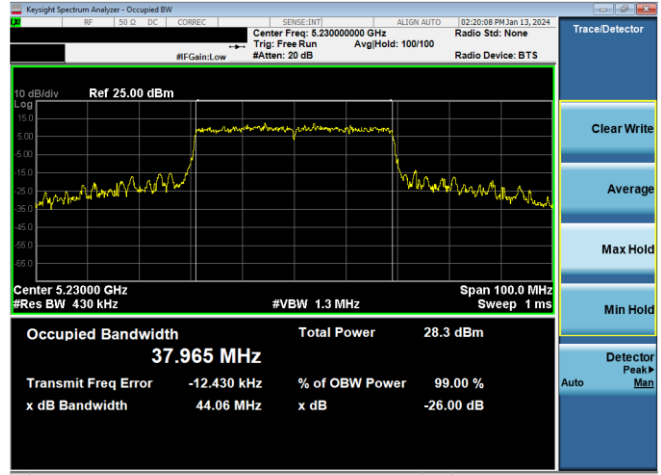

Plot 7-48. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 46, MCS11)

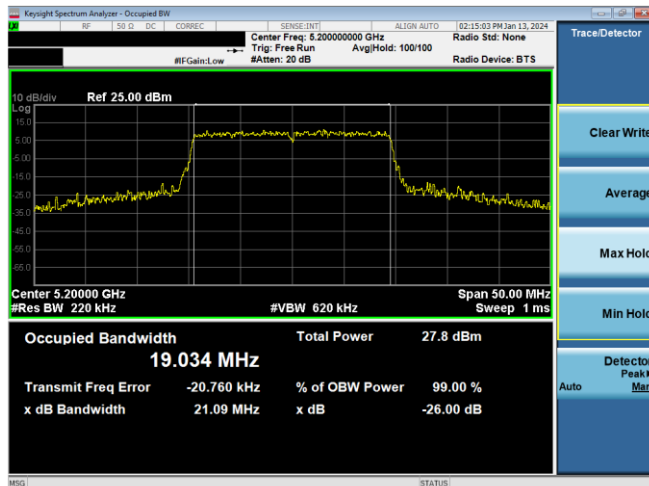


Plot 7-46. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 40, MCS11)

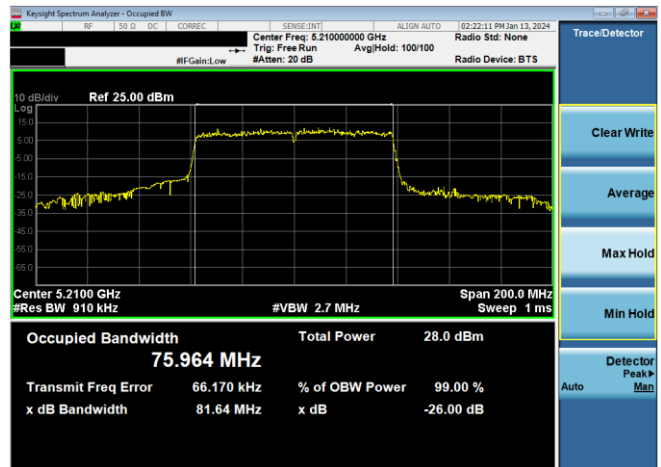

Plot 7-49. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 42, MCS9)




Plot 7-47. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 46, MCS7)

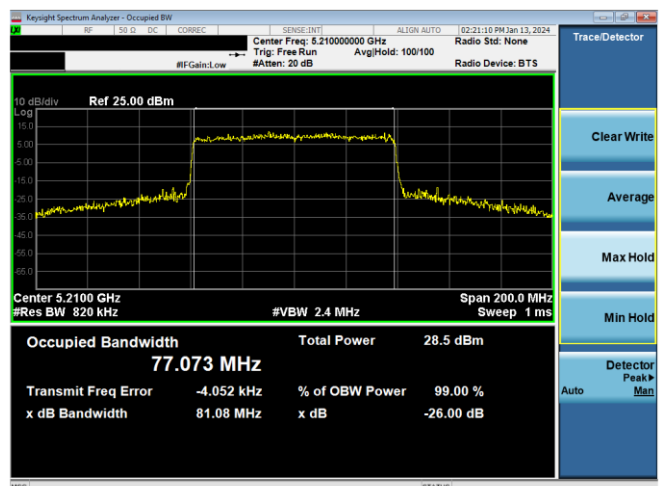


Plot 7-50. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 42, MCS11)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 30 of 595

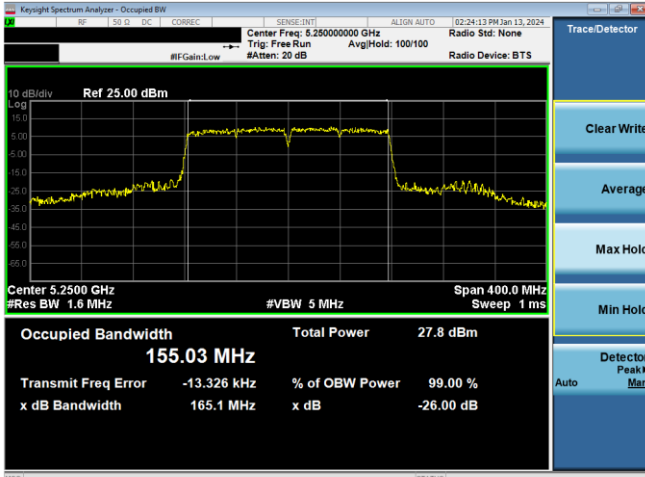


Plot 7-51. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 50, MCS9)

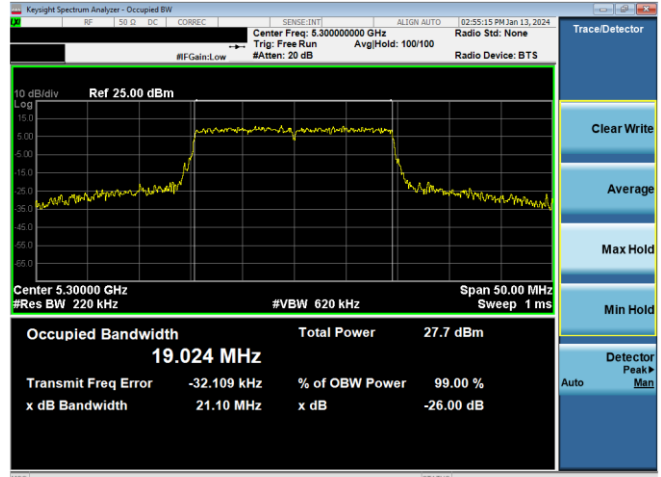


Plot 7-54. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 60, MCS11)

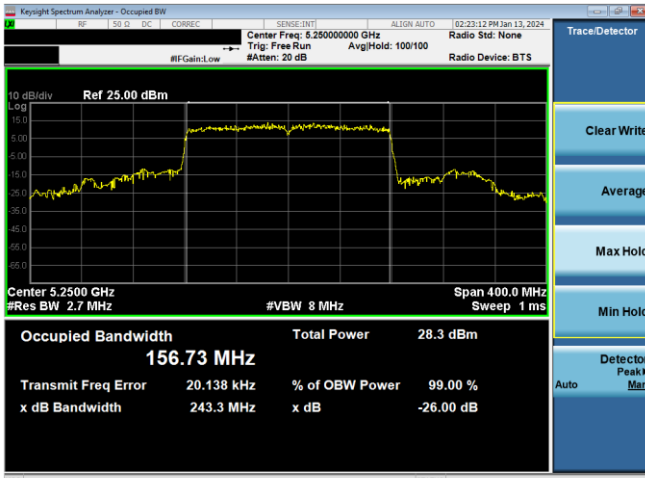


Plot 7-52. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 50, MCS11)

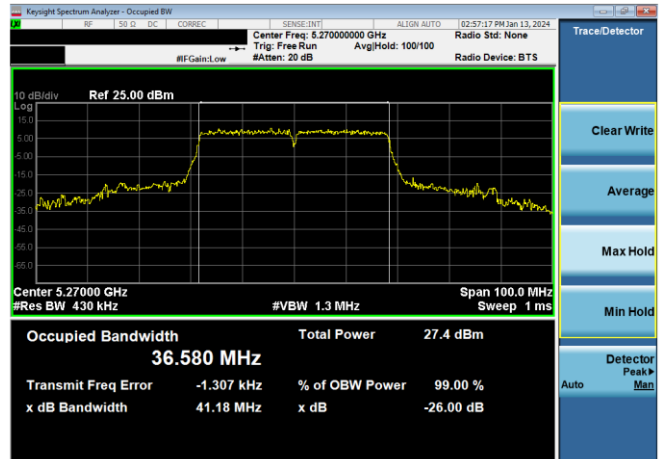

Plot 7-55. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 54, MCS7)

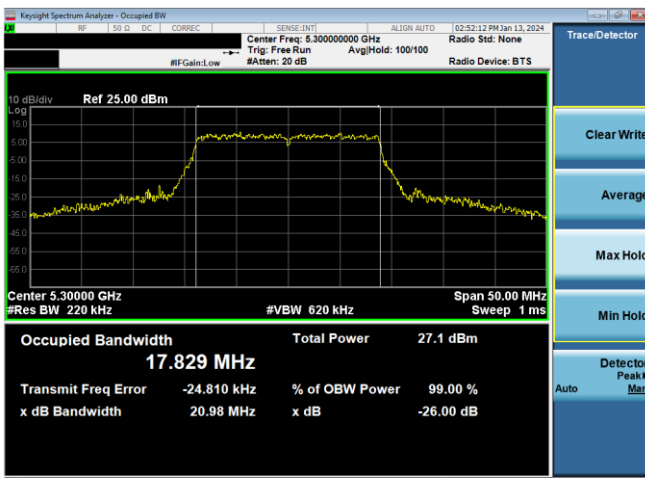


Plot 7-53. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 60, MCS7)

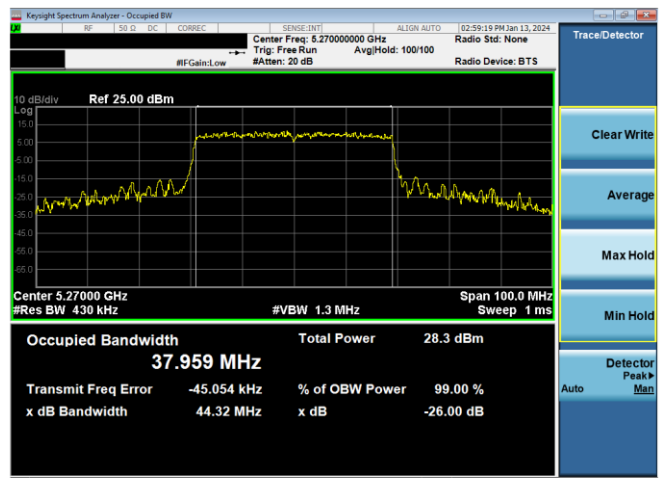


Plot 7-56. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 54, MCS11)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 31 of 595

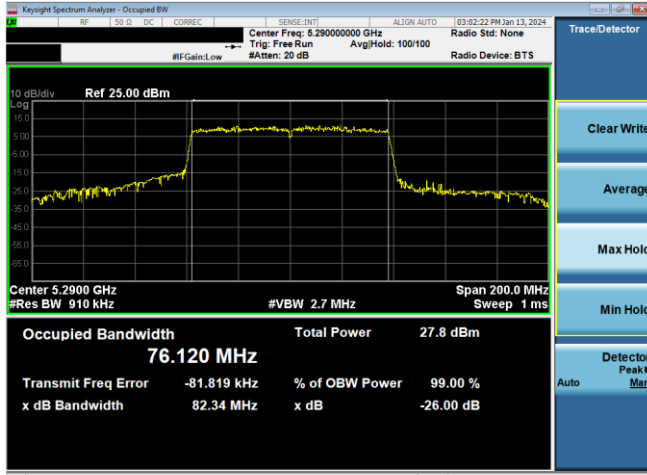


Plot 7-57. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 58, MCS9)

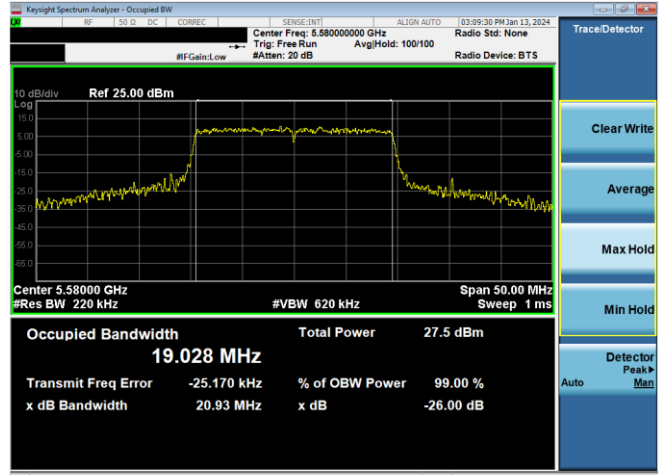


Plot 7-60. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 116, MCS11)

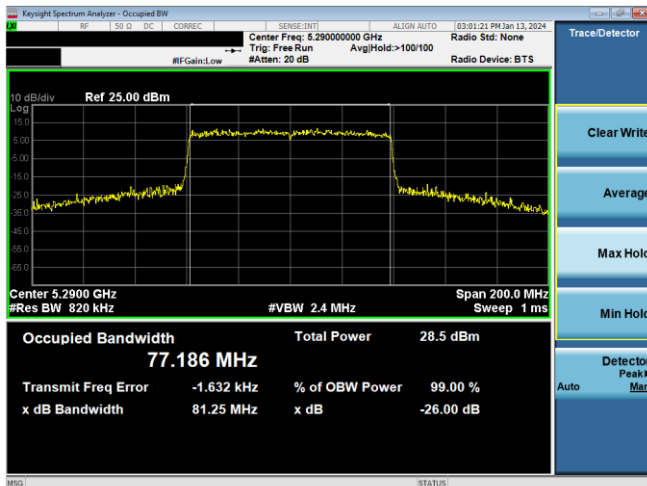


Plot 7-58. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 58, MCS11)

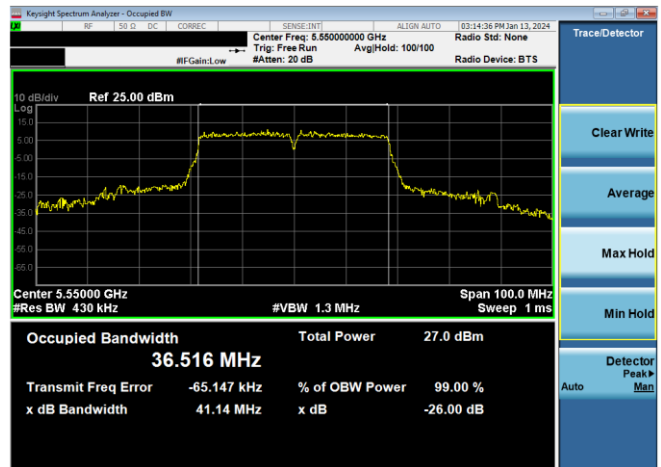

Plot 7-61. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 110) , MCS7)

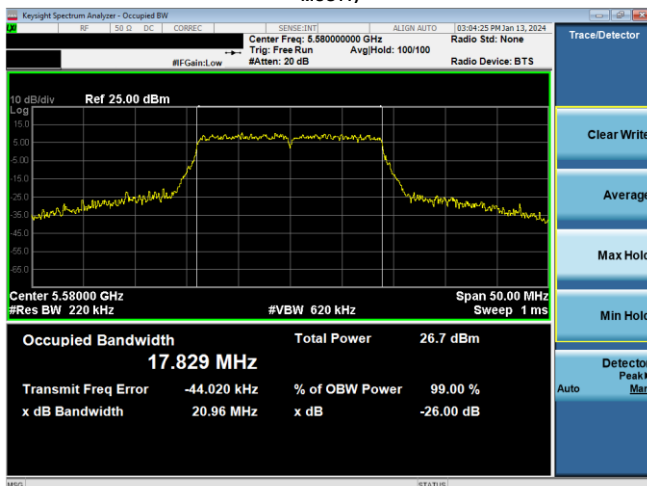

Plot 7-59. 26dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 116, MCS7)

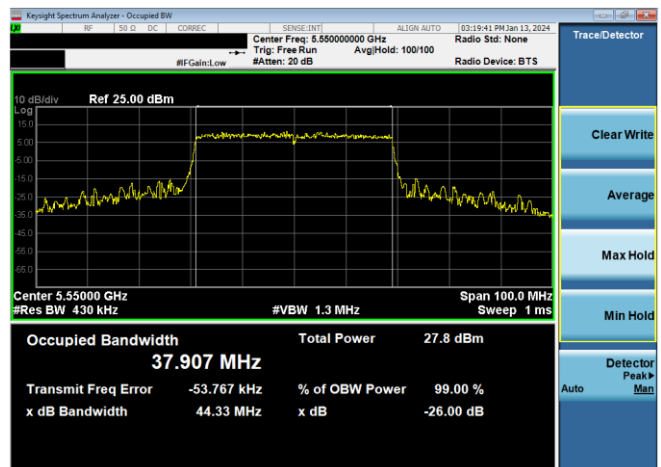


Plot 7-62. 26dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 110, MCS11)


FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 32 of 595




Plot 7-63. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 122, MCS9)

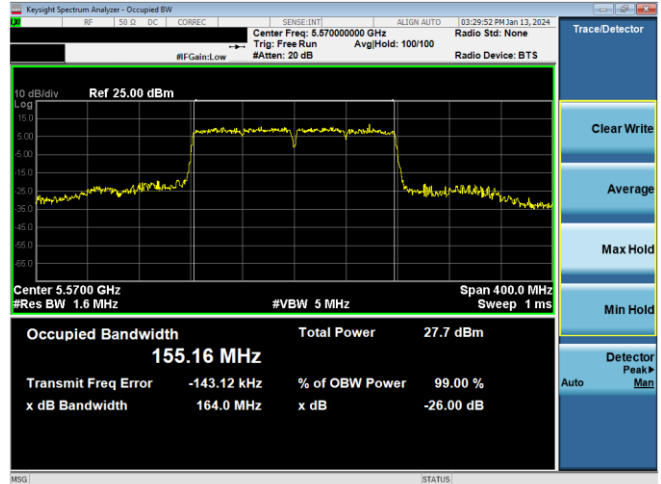

Plot 7-65. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 114, MCS9)

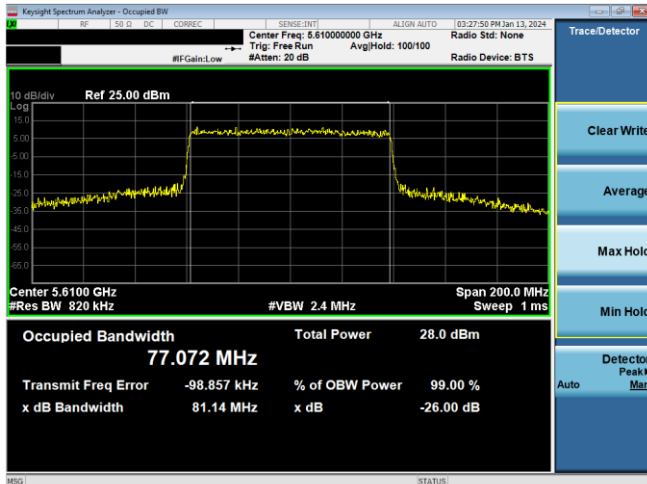

Plot 7-64. 26dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 122, MCS11)

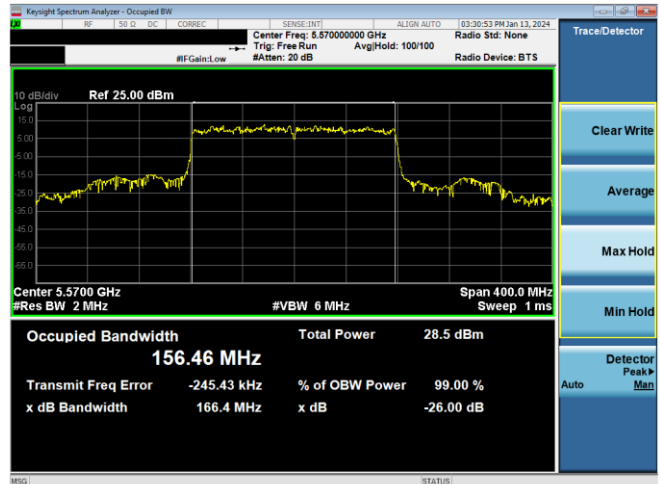

Plot 7-66. 26dB BW & 99% OBW Antenna WF5b (160MHz BW 802.11ac – Ch. 114, MCS11)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 33 of 595

7.2.2 Antenna WF8 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	19.5/21.7 (MCS2)	17.80	21.58
	5200	40	n (20MHz)	19.5/21.7 (MCS2)	17.67	20.69
	5240	48	n (20MHz)	19.5/21.7 (MCS2)	17.69	21.05
	5180	36	ax (SU) (20MHz)	24/25.8 (MCS2)	19.09	22.22
	5200	40	ax (SU) (20MHz)	24/25.8 (MCS2)	18.98	20.92
	5240	48	ax (SU) (20MHz)	24/25.8 (MCS2)	19.01	21.04
	5190	38	n (40MHz)	40/40.5 (MCS2)	36.40	41.58
	5230	46	n (40MHz)	40/40.5 (MCS2)	36.16	40.91
	5190	38	ax (SU) (40MHz)	49/51.6 (MCS2)	38.04	43.09
	5230	46	ax (SU) (40MHz)	49/51.6 (MCS2)	37.90	41.13
	5210	42	ac (80MHz)	87.8/97.5 (MCS2)	75.54	81.74
Band 1/2	5210	42	ax (SU) (80MHz)	102/108.1 (MCS2)	77.20	86.81
	5250	50	ac (160MHz)	87.8/97.5 (MCS2)	154.23	163.43
Band 2A	5250	50	ax (SU) (160MHz)	102/108.1 (MCS2)	156.23	164.69
	5260	52	n (20MHz)	19.5/21.7 (MCS2)	17.66	20.61
	5300	60	n (20MHz)	19.5/21.7 (MCS2)	17.69	20.86
	5320	64	n (20MHz)	19.5/21.7 (MCS2)	17.77	21.29
	5260	52	ax (SU) (20MHz)	24/25.8 (MCS2)	19.01	21.20
	5300	60	ax (SU) (20MHz)	24/25.8 (MCS2)	18.97	21.14
	5320	64	ax (SU) (20MHz)	24/25.8 (MCS2)	19.03	24.15
	5270	54	n (40MHz)	40/40.5 (MCS2)	36.25	41.01
	5310	62	n (40MHz)	40/40.5 (MCS2)	36.49	41.88
	5270	54	ax (SU) (40MHz)	49/51.6 (MCS2)	37.95	41.25
	5310	62	ax (SU) (40MHz)	49/51.6 (MCS2)	38.01	43.99
Band 2C	5290	58	ac (80MHz)	87.8/97.5 (MCS2)	75.62	84.49
	5290	58	ax (SU) (80MHz)	102/108.1 (MCS2)	77.31	83.47
	5500	100	n (20MHz)	19.5/21.7 (MCS2)	17.83	21.50
	5580	116	n (20MHz)	19.5/21.7 (MCS2)	17.69	20.78
	5720	144	n (20MHz)	19.5/21.7 (MCS2)	17.67	20.85
	5500	100	ax (SU) (20MHz)	24/25.8 (MCS2)	19.04	24.15
	5580	116	ax (SU) (20MHz)	24/25.8 (MCS2)	19.02	21.19
	5720	144	ax (SU) (20MHz)	24/25.8 (MCS2)	18.98	21.27
	5510	102	n (40MHz)	40/40.5 (MCS2)	36.39	41.91
	5550	110	n (40MHz)	40/40.5 (MCS2)	36.37	40.75
	5710	142	n (40MHz)	40/40.5 (MCS2)	36.27	40.78
5510	102	ax (SU) (40MHz)	49/51.6 (MCS2)	37.95	43.69	
5550	110	ax (SU) (40MHz)	49/51.6 (MCS2)	37.94	41.36	
5710	142	ax (SU) (40MHz)	49/51.6 (MCS2)	37.93	41.34	
5530	106	ac (80MHz)	87.8/97.5 (MCS2)	75.67	81.88	
5690	138	ac (80MHz)	87.8/97.5 (MCS2)	75.53	81.16	
5530	106	ax (SU) (80MHz)	102/108.1 (MCS2)	77.24	85.43	
5690	138	ax (SU) (80MHz)	102/108.1 (MCS2)	77.17	81.22	
5570	114	ac (160MHz)	87.8/97.5 (MCS2)	154.25	164.88	
5570	114	ax (SU) (160MHz)	102/108.1 (MCS2)	156.54	164.88	

Table 7-5. Conducted Bandwidth Measurements Antenna WF8 (Low Data Rate)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 34 of 595

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	n (20MHz)	39/43.3 (MCS4)	17.76	20.81
	5200	40	n (20MHz)	39/43.3 (MCS4)	17.69	20.49
	5240	48	n (20MHz)	39/43.3 (MCS4)	17.70	20.73
	5180	36	ax (SU) (20MHz)	49/51.6 (MCS4)	19.08	23.49
	5200	40	ax (SU) (20MHz)	49/51.6 (MCS4)	18.98	20.96
	5240	48	ax (SU) (20MHz)	49/51.6 (MCS4)	19.01	21.55
	5190	38	n (40MHz)	81/90 (MCS4)	36.35	41.43
	5230	46	n (40MHz)	81/90 (MCS4)	36.31	40.82
	5190	38	ax (SU) (40MHz)	98/103.2 (MCS4)	38.16	55.81
	5230	46	ax (SU) (40MHz)	98/103.2 (MCS4)	37.98	41.46
	5210	42	ac (80MHz)	175.5/195 (MCS4)	75.51	80.72
Band 1/2	5210	42	ax (SU) (80MHz)	204/216.2 (MCS4)	77.21	81.75
	5250	50	ax (SU) (160MHz)	175.5/195 (MCS4)	154.41	163.75
Band 2A	5250	50	ax (SU) (160MHz)	204/216.2 (MCS4)	156.21	164.46
	5260	52	n (20MHz)	39/43.3 (MCS4)	17.77	20.76
	5300	60	n (20MHz)	39/43.3 (MCS4)	17.69	20.55
	5320	64	n (20MHz)	39/43.3 (MCS4)	17.70	20.68
	5260	52	ax (SU) (20MHz)	49/51.6 (MCS4)	19.05	21.11
	5300	60	ax (SU) (20MHz)	49/51.6 (MCS4)	19.03	21.10
	5320	64	ax (SU) (20MHz)	49/51.6 (MCS4)	19.10	26.74
	5270	54	n (40MHz)	81/90 (MCS4)	36.27	40.39
	5310	62	n (40MHz)	81/90 (MCS4)	36.38	46.40
	5270	54	ax (SU) (40MHz)	98/103.2 (MCS4)	37.93	41.26
	5310	62	ax (SU) (40MHz)	98/103.2 (MCS4)	38.16	59.90
	5290	58	ac (80MHz)	175.5/195 (MCS4)	75.68	80.94
	5290	58	ax (SU) (80MHz)	204/216.2 (MCS4)	77.28	82.14
	Band 2C	5500	100	n (20MHz)	39/43.3 (MCS4)	17.76
5580		116	n (20MHz)	39/43.3 (MCS4)	17.71	20.87
5720		144	n (20MHz)	39/43.3 (MCS4)	17.67	20.46
5500		100	ax (SU) (20MHz)	49/51.6 (MCS4)	19.06	21.00
5580		116	ax (SU) (20MHz)	49/51.6 (MCS4)	19.00	21.13
5720		144	ax (SU) (20MHz)	49/51.6 (MCS4)	19.03	20.94
5510		102	n (40MHz)	81/90 (MCS4)	36.31	40.83
5550		110	n (40MHz)	81/90 (MCS4)	36.25	40.49
5710		142	n (40MHz)	81/90 (MCS4)	36.25	41.03
5510		102	ax (SU) (40MHz)	98/103.2 (MCS4)	38.15	48.13
5550		110	ax (SU) (40MHz)	98/103.2 (MCS4)	37.94	40.89
5710		142	ax (SU) (40MHz)	98/103.2 (MCS4)	37.92	41.11
5530		106	ac (80MHz)	175.5/195 (MCS4)	75.58	80.38
5690		138	ac (80MHz)	175.5/195 (MCS4)	75.43	80.53
5530		106	ax (SU) (80MHz)	204/216.2 (MCS4)	77.24	81.77
5690		138	ax (SU) (80MHz)	204/216.2 (MCS4)	77.02	81.68
5570		114	ac (160MHz)	175.5/195 (MCS4)	154.44	163.21
5570		114	ax (SU) (160MHz)	204/216.2 (MCS4)	156.09	164.56

Table 7-6. Conducted Bandwidth Measurements Antenna WF8 (Mid Data Rate)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 35 of 595

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	
Band 1	5180	36	n (20MHz)	65/72.2 (MCS7)	17.84	21.05	
	5200	40	n (20MHz)	65/72.2 (MCS7)	17.81	21.15	
	5240	48	n (20MHz)	65/72.2 (MCS7)	17.82	21.05	
	5180	36	ax (SU) (20MHz)	135/143.4 (MCS11)	19.03	21.23	
	5200	40	ax (SU) (20MHz)	135/143.4 (MCS11)	19.05	21.06	
	5240	48	ax (SU) (20MHz)	135/143.4 (MCS11)	18.99	21.14	
	5190	38	n (40MHz)	135/150 (MCS7)	36.51	41.42	
	5230	46	n (40MHz)	135/150 (MCS7)	36.62	41.28	
	5190	38	ax (SU) (40MHz)	271/286 (MCS11)	37.93	44.41	
	5230	46	ax (SU) (40MHz)	271/286 (MCS11)	37.95	47.85	
	5210	42	ac (80MHz)	390/433.3 (MCS9)	75.95	82.03	
Band 1/2	5210	42	ax (SU) (80MHz)	567/600.5 (MCS11)	77.22	81.16	
	5250	50	ac (160MHz)	390/433.3 (MCS9)	154.91	164.62	
Band 2A	5250	50	ax (SU) (160MHz)	567/600.5 (MCS11)	156.95	165.82	
	5260	52	n (20MHz)	65/72.2 (MCS7)	17.83	20.96	
	5300	60	n (20MHz)	65/72.2 (MCS7)	17.78	20.80	
	5320	64	n (20MHz)	65/72.2 (MCS7)	17.81	20.90	
	5260	52	ax (SU) (20MHz)	135/143.4 (MCS11)	19.04	20.83	
	5300	60	ax (SU) (20MHz)	135/143.4 (MCS11)	19.01	21.12	
	5320	64	ax (SU) (20MHz)	135/143.4 (MCS11)	19.03	21.25	
	5270	54	n (40MHz)	135/150 (MCS7)	36.84	42.29	
	5310	62	n (40MHz)	135/150 (MCS7)	36.54	41.15	
	5270	54	ax (SU) (40MHz)	271/286 (MCS11)	37.97	49.99	
	5310	62	ax (SU) (40MHz)	271/286 (MCS11)	37.95	44.11	
	5290	58	ac (80MHz)	390/433.3 (MCS9)	75.99	83.86	
	5290	58	ax (SU) (80MHz)	567/600.5 (MCS11)	77.18	81.53	
	Band 2C	5500	100	n (20MHz)	65/72.2 (MCS7)	17.83	20.90
		5580	116	n (20MHz)	65/72.2 (MCS7)	17.85	20.87
5720		144	n (20MHz)	65/72.2 (MCS7)	17.83	20.97	
5500		100	ax (SU) (20MHz)	135/143.4 (MCS11)	19.08	21.45	
5580		116	ax (SU) (20MHz)	135/143.4 (MCS11)	19.01	22.48	
5720		144	ax (SU) (20MHz)	135/143.4 (MCS11)	19.03	20.90	
5510		102	n (40MHz)	135/150 (MCS7)	36.47	41.28	
5550		110	n (40MHz)	135/150 (MCS7)	36.48	41.29	
5710		142	n (40MHz)	135/150 (MCS7)	36.45	41.09	
5510		102	ax (SU) (40MHz)	271/286 (MCS11)	37.90	44.22	
5550		110	ax (SU) (40MHz)	271/286 (MCS11)	37.97	44.19	
5710		142	ax (SU) (40MHz)	271/286 (MCS11)	37.87	40.90	
5530		106	ac (80MHz)	390/433.3 (MCS9)	76.00	82.26	
5690		138	ac (80MHz)	390/433.3 (MCS9)	75.91	82.31	
5530		106	ax (SU) (80MHz)	567/600.5 (MCS11)	77.22	81.31	
5690		138	ax (SU) (80MHz)	567/600.5 (MCS11)	77.01	81.73	
5570		114	ac (160MHz)	390/433.3 (MCS9)	154.88	164.13	
5570		114	ax (SU) (160MHz)	567/600.5 (MCS11)	156.74	166.80	

Table 7-7. Conducted Bandwidth Measurements Antenna WF8 (High Data Rate)

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-11-R1.BCG	Test Dates: 12/06/202 - 02/20/2024	EUT Type: Tablet Device	Page 36 of 595