





Plot 7-846. PSD CDD Antenna WF5b (20MHz BW 802.11n - Ch. 157, MCS10)




Plot 7-847. PSD CDD Antenna WF7 (20MHz BW 802.11n - Ch. 157, MCS10)



Plot 7-848. PSD CDD Antenna WF5b (20MHz BW 802.11ax(SU) - Ch. 157, MCS2)



Plot 7-849. PSD CDD Antenna WF7 (20MHz BW 802.11ax(SU) - Ch. 157, MCS2)



Plot 7-850. PSD CDD Antenna WF5b (40MHz BW 802.11n - Ch. 151, MCS10)




Plot 7-851. PSD CDD Antenna WF7 (40MHz BW 802.11n - Ch. 151, MCS10)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 275 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 275 01 595





Plot 7-852. PSD CDD Antenna WF5b (40MHz BW 802.11ax(SU) - Ch. 151, MCS2)



Plot 7-855. PSD CDD Antenna WF7 (80MHz BW 802.11ac - Ch. 155, MCS2)




Plot 7-853. PSD CDD Antenna WF7 (40MHz BW 802.11ax(SU) - Ch. 151, MCS2)



Plot 7-856. PSD CDD Antenna WF5b (80MHz BW 802.11ax(SU) - Ch. 155, MCS2)



Plot 7-854. PSD CDD Antenna WF5b (80MHz BW 802.11ac - Ch. 155, MCS2)



Plot 7-857. PSD CDD Antenna WF7 (80MHz BW 802.11ax(SU) - Ch. 155, MCS2)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 276 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 276 01 595





Plot 7-858. PSD CDD Antenna WF5b (20MHz BW 802.11n - Ch. 157, MCS12)



Plot 7-859. PSD CDD Antenna WF7 (20MHz BW 802.11n - Ch. 157, MCS12)



Plot 7-860. PSD CDD Antenna WF5b (20MHz BW 802.11ax(SU) - Ch. 157, MCS4)



Plot 7-861. PSD CDD Antenna WF7 (20MHz BW 802.11ax(SU) - Ch. 157, MCS4)



Plot 7-862. PSD CDD Antenna WF5b (40MHz BW 802.11n - Ch. 151, MCS12)




Plot 7-863. PSD CDD Antenna WF7 (40MHz BW 802.11n - Ch. 151, MCS12)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 277 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 277 01 595






Plot 7-864. PSD CDD Antenna WF5b (40MHz BW 802.11ax(SU) - Ch. 151, MCS4)



Plot 7-867. PSD CDD Antenna WF7 (80MHz BW 802.11ac - Ch. 155, MCS4)



Plot 7-865. PSD CDD Antenna WF7 (40MHz BW 802.11ax(SU) - Ch. 151, MCS4)



Plot 7-868. PSD CDD Antenna WF5b (80MHz BW 802.11ax(SU) - Ch. 155, MCS4)



MCS4)



Plot 7-869. PSD CDD Antenna WF7 (80MHz BW 802.11ax(SU) - Ch. 155, MCS4)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 278 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 276 01 595





Plot 7-870. PSD CDD Antenna WF5b (20MHz BW 802.11n - Ch. 157, MCS15)




Plot 7-871. PSD CDD Antenna WF7 (20MHz BW 802.11n - Ch. 157, MCS15)




Plot 7-872. PSD CDD Antenna WF5b (20MHz BW 802.11ax(SU) - Ch. 157,



Plot 7-873. PSD CDD Antenna WF7 (20MHz BW 802.11ax(SU) - Ch. 157, MCS11)



Plot 7-874. PSD CDD Antenna WF5b (40MHz BW 802.11n - Ch. 151, MCS15)




Plot 7-875. PSD CDD Antenna WF7 (40MHz BW 802.11n - Ch. 151, MCS15)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 279 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 279 01 595






Plot 7-876. PSD CDD Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 151, MCS11)




Plot 7-879. PSD CDD Antenna WF7 (80MHz BW 802.11ac - Ch. 155, MCS9)



Plot 7-877. PSD CDD Antenna WF7 (40MHz BW 802.11ax(SU) - Ch. 151, MCS11)



Plot 7-880. PSD CDD Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 155, MCS11)



Plot 7-878. PSD CDD Antenna WF5b (80MHz BW 802.11ac - Ch. 155, MCS9)



Plot 7-881. PSD CDD Antenna WF7 (80MHz BW 802.11ax(SU) - Ch. 155, MCS11)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 280 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 200 01 595



	Frequency [MHz]	Channel No.	802.11 MODE	Mode	Data Rate [Mbps]	Antenna WF8 Power Density [dBm/MHz]	Antenna WF7 Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directoinal Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
	5180	36	n (20MHz)	SDM	39/43.3 (MCS10)	3.50	3.29	6.41	0.85	4.14	10.0	-5.86
	5200	40	n (20MHz)	SDM	39/43.3 (MCS10)	3.54	3.29	6.42	0.85	4.14	10.0	-5.86
	5240	48	n (20MHz)	SDM	39/43.3 (MCS10)	3.35	3.20	6.28	0.85	4.05	10.0	-5.95
	5180	36	ax (SU) (20MHz)	SDM	48/51.6 (MCS2)	2.06	1.61	4.85	0.85	2.46	10.0	-7.54
	5200	40	ax (SU) (20MHz)	SDM	48/51.6 (MCS2)	2.08	1.23	4.68	0.85	2.08	10.0	-7.92
<u> 5</u>	5240	48	ax (SU) (20MHz)	SDM	48/51.6 (MCS2)	1.89	1.82	4.86	0.85	2.67	10.0	-7.33
Ban	5190	38	n (40MHz)	SDM	81/60 (MCS10)	0.97	1.02	4.01	0.85	1.87	10.0	-8.13
_	5230	46	n (40MHz)	SDM	81/60 (MCS10)	3.71	3.43	6.58	0.85	4.28	10.0	-5.72
	5190	38	ax (SU) (40MHz)	SDM	98/103.2 (MCS2)	-0.30	-0.48	2.62	0.85	0.37	10.0	-9.63
	5230	46	ax (SU) (40MHz)	SDM	98/103.2 (MCS2)	1.93	1.86	4.91	0.85	2.72	10.0	-7.28
	5210	42	ac (80MHz)	SDM	175.5/195 (MCS2)	-2.00	-2.55	0.75	0.85	-1.70	10.0	-11.70
	5210	42	ax (SU) (80MHz)	SDM	204/216.2 (MCS2)	-4.12	-4.85	-1.46	0.85	-4.00	10.0	-14.00
Band 1/2	5250	50	ac (160MHz)	SDM	175.5/195 (MCS2)	-7.51	-6.72	-4.08	0.85	-5.87	10.0	-15.87
Ba 1/	5250	50	ax (SU) (160MHz)	SDM	204/216.2 (MCS2)	-8.50	-8.24	-5.36	0.85	-7.39	10.0	-17.39

Table 7-242. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD/SDM (Low Data Rate)

	Frequency [MHz]	Channel No.	802.11 MODE	Mode	Data Rate [Mbps]	Antenna WF8 Power Density [dBm/MHz]	Antenna WF7 Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directoinal Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
	5180	36	n (20MHz)	SDM	78/86.7 (MCS12)	3.63	3.27	6.47	0.85	4.13	10.0	-5.87
	5200	40	n (20MHz)	SDM	78/86.7 (MCS12)	3.62	3.48	6.56	0.85	4.33	10.0	-5.67
	5240	48	n (20MHz)	SDM	78/86.7 (MCS12)	3.43	3.30	6.37	0.85	4.15	10.0	-5.85
	5180	36	ax (SU) (20MHz)	SDM	98/103.2 (MCS4)	1.85	1.28	4.58	0.85	2.14	10.0	-7.86
	5200	40	ax (SU) (20MHz)	SDM	98/103.2 (MCS4)	2.21	1.60	4.92	0.85	2.45	10.0	-7.55
D D	5240	48	ax (SU) (20MHz)	SDM	98/103.2 (MCS4)	2.49	1.85	5.19	0.85	2.70	10.0	-7.30
Ban	5190	38	n (40MHz)	SDM	162/180 (MCS12)	1.37	1.47	4.43	0.85	2.32	10.0	-7.68
_	5230	46	n (40MHz)	SDM	162/180 (MCS12)	3.84	3.45	6.66	0.85	4.31	10.0	-5.69
	5190	38	ax (SU) (40MHz)	SDM	196/206.5 (MCS4)	0.02	-0.43	2.81	0.85	0.42	10.0	-9.58
	5230	46	ax (SU) (40MHz)	SDM	196/206.5 (MCS4)	2.26	2.43	5.35	0.85	3.28	10.0	-6.72
	5210	42	ac (80MHz)	SDM	351/390 (MCS4)	-2.29	-2.94	0.40	0.85	-2.09	10.0	-12.09
	5210	42	ax (SU) (80MHz)	SDM	408/432.4 (MCS4)	-4.93	-4.86	-1.88	0.85	-4.01	10.0	-14.01
Band 1/2	5250	50	ac (160MHz)	SDM	351/390 (MCS4)	-8.12	-8.51	-5.30	0.85	-7.66	10.0	-17.66
Ba 1,	5250	50	ax (SU) (160MHz)	SDM	408/432.4 (MCS4)	-9.15	-9.55	-6.33	0.85	-8.70	10.0	-18.70

Table 7-243. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD/SDM (Mid Data Rate)

	Frequency [MHz]	Channel No.	802.11 MODE	Mode	Data Rate [Mbps]	Antenna WF8 Power Density [dBm/MHz]	Antenna WF7 Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directoinal Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
	5180	36	n (20MHz)	SDM	130/144.4 (MCS15)	2.55	2.13	5.36	0.85	2.99	10.0	-7.01
	5200	40	n (20MHz)	SDM	130/144.4 (MCS15)	2.39	2.10	5.26	0.85	2.95	10.0	-7.05
	5240	48	n (20MHz)	SDM	130/144.4 (MCS15)	2.21	1.93	5.08	0.85	2.78	10.0	-7.22
	5180	36	ax (SU) (20MHz)	SDM	270/286.8 (MCS11)	2.31	1.62	4.99	0.85	2.47	10.0	-7.53
	5200	40	ax (SU) (20MHz)	SDM	270/286.8 (MCS11)	2.55	1.88	5.24	0.85	2.74	10.0	-7.26
d 1	5240	48	ax (SU) (20MHz)	SDM	270/286.8 (MCS11)	2.06	1.70	4.89	0.85	2.55	10.0	-7.45
Ban	5190	38	n (40MHz)	SDM	270/300 (MCS15)	-0.66	-1.00	2.19	0.85	-0.14	10.0	-10.14
_	5230	46	n (40MHz)	SDM	270/300 (MCS15)	2.87	2.17	5.54	0.85	3.02	10.0	-6.98
	5190	38	ax (SU) (40MHz)	SDM	271/286.8 (MCS11)	-0.88	-1.25	1.95	0.85	-0.39	10.0	-10.39
	5230	46	ax (SU) (40MHz)	SDM	271/286.8 (MCS11)	2.80	2.29	5.56	0.85	3.14	10.0	-6.86
	5210	42	ac (80MHz)	SDM	780/866.7 (MCS9)	-4.46	-4.77	-1.60	0.85	-3.92	10.0	-13.92
	5210	42	ax (SU) (80MHz)	SDM	1134/1201 (MCS11)	-5.18	-4.61	-1.87	0.85	-3.76	10.0	-13.76
Band 1/2	5250	50	ac (160MHz)	SDM	780/866.7 (MCS9)	-9.31	-9.68	-6.48	0.85	-8.83	10.0	-18.83
Ba 1/	5250	50	ax (SU) (160MHz)	SDM	1134/1201 (MCS11)	-9.81	-10.30	-7.04	0.85	-9.44	10.0	-19.44


Table 7-244. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD/SDM (High Data Rate)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 201 of E0E
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Page 281 of 595






Plot 7-882. ISED PSD SDM Antenna WF7 (20MHz BW 11n - Ch.40, MCS10)




Plot 7-883. ISED PSD SDM Antenna WF7 (20MHz BW 11ax(SU) - Ch.40, MCS2)



Plot 7-884. ISED PSD SDM Antenna WF7 (40MHz BW 11n - Ch.46, MCS10)



Plot 7-885. ISED CDD PSD Antenna WF7 (40MHz BW 11ax(SU) - Ch.46, MCS2)



Plot 7-886. ISED PSD CDD Antenna WF7 (80MHz BW 11ac - Ch.42, MCS2)



Plot 7-887. ISED PSD CDD Antenna WF7 (80MHz BW 11ax (SU) - Ch.42, MCS2)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 282 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 262 01 595








Plot 7-888. ISED PSD CDD Antenna WF7 (160MHz BW 11ac - Ch.50, MCS2)

Plot 7-891. ISED PSD SDM Antenna WF7 (20MHz BW 11ax(SU) - Ch.40, MCS4)





Plot 7-889. ISED PSD CDD Antenna WF7 (160MHz BW 11ax (SU) - Ch.50, MCS2)

Plot 7-892. ISED PSD SDM Antenna WF7 (40MHz BW 11n - Ch.46, MCS12)





Plot 7-890. ISED PSD CDD Antenna WF7 (20MHz BW 11n - Ch.40, MCS12)

Plot 7-893. ISED SDM PSD Antenna WF7 (40MHz BW 11ax(SU) - Ch.46, MCS4)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 283 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 203 01 595








Plot 7-894. ISED PSD CDD Antenna WF7 (80MHz BW 11ac - Ch.42, MCS4)

Plot 7-897. ISED CDD SDM Antenna WF7 (160MHz BW 11ax (SU) - Ch.50, MCS4)





Plot 7-895. ISED PSD CDD Antenna WF7 (80MHz BW 11ax (SU) - Ch.42, MCS4)

Plot 7-898. ISED PSD CDD Antenna WF7 (20MHz BW 11n - Ch.40, MCS15)





Plot 7-896. ISED PSD CDD Antenna WF7 (160MHz BW 11ac - Ch.50, MCS4)

Plot 7-899. ISED PSD CDD Antenna WF7 (20MHz BW 11ax(SU) - Ch.40, MCS11)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 294 of 505	
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Page 284 of 595	







#Avg Type: RMS AvgiHold: 100/10

Plot 7-900. ISED PSD SDM Antenna WF7 (40MHz BW 11n - Ch.46, MCS15)


Plot 7-903. ISED PSD CDD Antenna WF7 (80MHz BW 11ax (SU) - Ch.42, MCS11)






Plot 7-901. ISED PSD SDM Antenna WF7 (40MHz BW 11ax(SU) - Ch.46, MCS11)

Plot 7-904. ISED PSD CDD Antenna WF7 (160MHz BW 11ac - Ch.50, MCS9)





Plot 7-902. ISED PSD CDD Antenna WF7 (80MHz BW 11ac - Ch.42, MCS9)

Plot 7-905. ISED PSD CDD Antenna WF7 (160MHz BW 11ax (SU) - Ch.50, MCS11)

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 285 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 200 01 595



7.6 Radiated Spurious Emissions – Above 1GHz §15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n, 802.11ax(SU) (20MHz BW), 802.11n, 802.11ax(SU) (40MHz BW), and 802.11ac, 802.11ax(SU) (80MHz), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-245 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [µV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-245. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5 KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = power average (RMS)
- 5. Number of measurement points = 1001 (Number of points must be > 2 x span/RBW)
- 6. Averaging type = power (RMS)
- 7. Sweep time = auto couple
- 8. Trace was averaged over 100 sweeps

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 286 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 200 01 595



Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

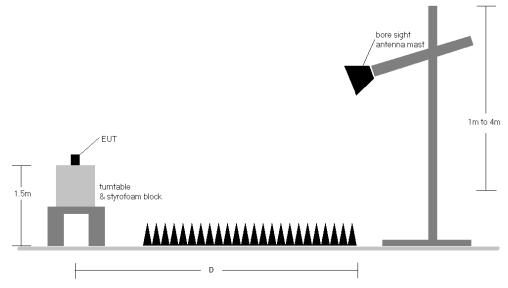


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 287 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Faye 207 01 595



Test Notes

- 1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-245.
- 2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-245. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
- 3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- 4. This unit was tested with its standard battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
- 6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
- 8. All data rates were investigated and only the worse case is reported
- 9. The unit was tested with all possible modes and only the highest emission is reported.
- 10. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- O AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dBμV/m] Limit [dBμV/m]

Radiated Band Edge Measurement Offset


The amplitude offset shown in the radiated restricted band edge plots in Section 7.6 was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) - Preamplifier Gain

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 288 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 200 01 595



7.6.1 Antenna WF5b Radiated Spurious Emission

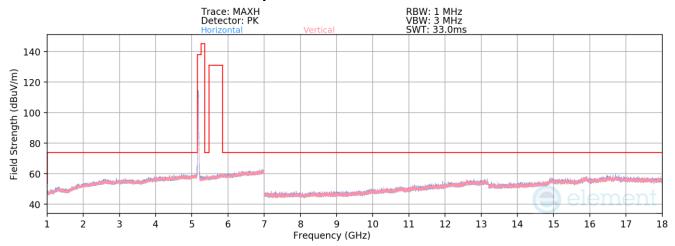

Plot 7-906. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 36)

Mode: 802.11n

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz


Channel: 36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10360.00	Peak	V	•		-72.09	15.15	50.06	68.23	-18.17
*	15540.00	Average	Н	-	-	-85.54	23.59	45.05	53.98	-8.93
*	15540.00	Peak	Н	-	-	-73.52	23.07	56.55	73.98	-17.43

Table 7-246. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 289 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 209 01 595



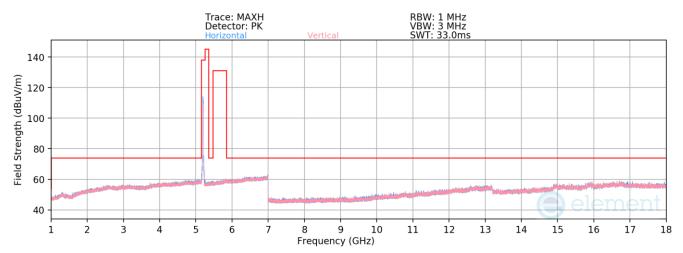

Plot 7-907. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 40)

 Mode:
 802.11n

 Data Rate:
 MCS0

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 5200MHz


 Channel:
 40

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10400.00	Peak	٧	-	-	-71.43	14.70	50.27	68.23	-17.96
*	15600.00	Average	Н	-	-	-85.16	23.12	44.96	53.98	-9.02
*	15600.00	Peak	Н	-	-	-73.22	22.65	56.43	73.98	-17.55

Table 7-247. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 290 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	raye 290 01 393



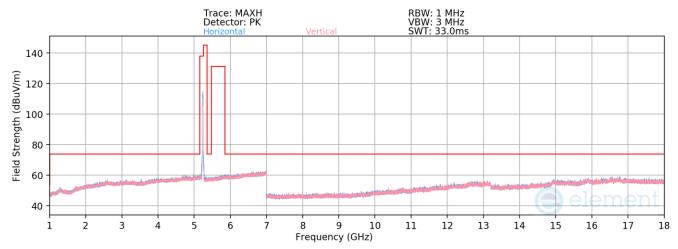

Plot 7-908. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 48)

Mode: 802.11n

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5240MHz


Channel: 48

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10480.00	Peak	٧	-	-	-71.64	15.06	50.41	68.23	-17.82
*	15720.00	Average	Н	-	-	-84.72	23.08	45.36	53.98	-8.62
*	15720.00	Peak	Н	-	-	-74.33	23.43	56.10	73.98	-17.88

Table 7-248. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager		
Test Report S/N:	Test Dates:	EUT Type:	Page 291 of 595		
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 291 01 595		



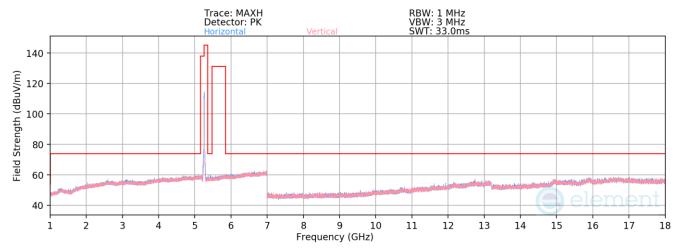

Plot 7-909. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 52)

Mode: 802.11n

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5260MHz


Channel: 52

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10520.00	Peak	V	-	-	-72.07	15.08	50.02	68.23	-18.21
*	15780.00	Average	Н	-	-	-84.35	22.41	45.06	53.98	-8.92
*	15780.00	Peak	Н	-	-	-72.46	22.41	56.95	73.98	-17.03

Table 7-249. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 292 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	raye 292 01 393



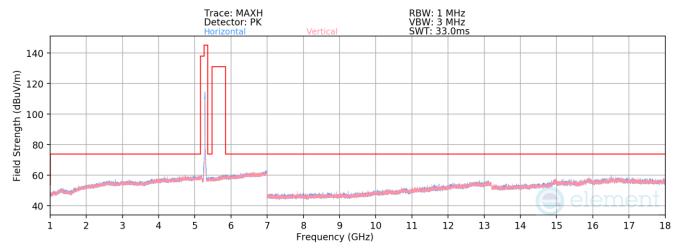

Plot 7-910. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 56)

 Mode:
 802.11n

 Data Rate:
 MCS0

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 5280MHz


 Channel:
 56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10560.00	Peak	Н	-	-	-71.79	14.87	50.08	68.23	-18.15
*	15840.00	Average	V	-	-	-85.60	24.18	45.58	53.98	-8.40
*	15840.00	Peak	V	-	-	-74.51	24.18	56.67	73.98	-17.31

Table 7-250. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 293 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	raye 293 01 393



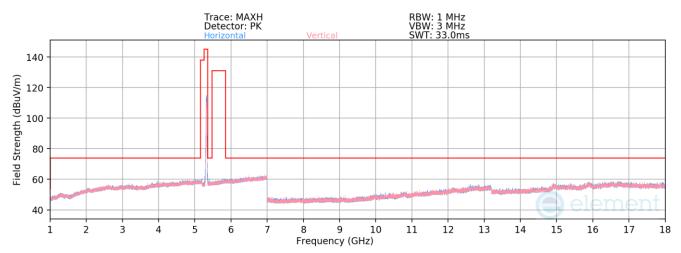

Plot 7-911. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 64)

Mode: 802.11n

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz


Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	10640.00	Average	Н	-	-	-83.35	14.56	38.21	53.98	-15.77
*	10640.00	Peak	Н	-	-	-71.43	14.56	50.12	73.98	-23.85
*	15960.00	Average	Н	-	-	-85.42	24.88	46.47	53.98	-7.51
*	15960.00	Peak	Н	-	-	-74.18	24.88	57.71	73.98	-16.27

Table 7-251. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 294 of 595	
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 294 01 595	



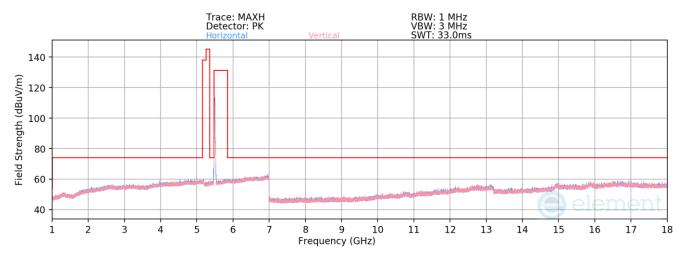

Plot 7-912. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 100)

 Mode:
 802.11n

 Data Rate:
 MCS0

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 5500MHz


 Channel:
 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11000.00	Average	٧	-	-	-83.10	15.41	39.31	53.98	-14.67
*	11000.00	Peak	٧	-	-	-72.22	15.72	50.50	73.98	-23.48
	16500.00	Peak	٧	-	-	-73.19	24.96	58.77	68.23	-9.46

Table 7-252. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 295 of 595	
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Page 295 01 595	



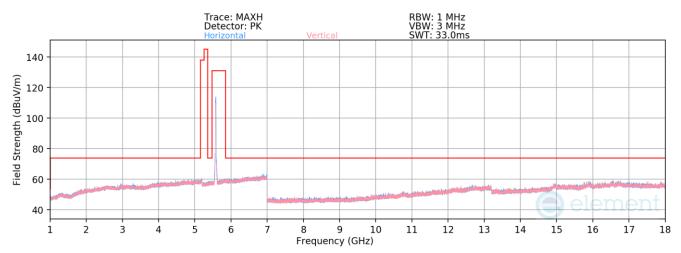

Plot 7-913. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 116)

Mode: 802.11n

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5580Hz


Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11160.00	Average	Н	-	-	-82.61	15.88	40.26	53.98	-13.72
*	11160.00	Peak	Н	-	-	-71.45	16.42	51.98	73.98	-22.00
	16740.00	Peak	Н	-	-	-73.72	25.08	58.36	68.23	-9.87

Table 7-253. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 296 of 595	
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 296 01 595	



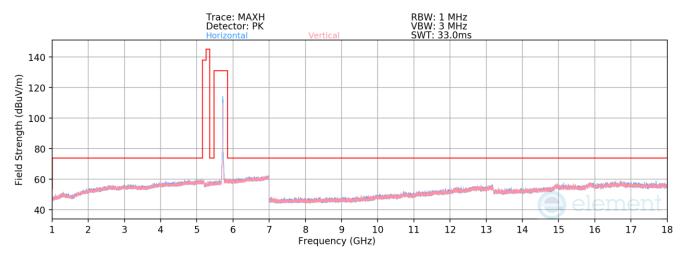

Plot 7-914. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 144)

 Mode:
 802.11n

 Data Rate:
 MCS0

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 5720


 Channel:
 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11440.00	Average	Н	-	-	-83.27	16.47	40.20	53.98	-13.78
*	11440.00	Peak	Н	-	-	-72.67	16.96	51.29	73.98	-22.69
	17160.00	Peak	Н	-	-	-73.91	24.70	57.79	68.23	-10.44

Table 7-254. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 297 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 297 01 595



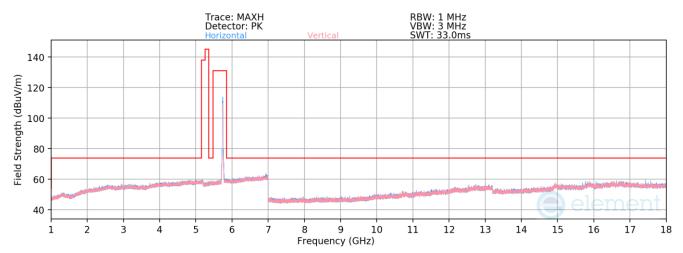

Plot 7-915. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 149)

 Mode:
 802.11n

 Data Rate:
 MCS0

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 5745MHz


 Channel:
 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11490.00	Average	٧	-	-	-83.10	16.28	40.18	53.98	-13.80
*	11490.00	Peak	٧	-	-	-72.23	16.87	51.64	73.98	-22.34
	17235.00	Peak	٧	-	-	-73.75	24.37	57.61	68.23	-10.62

Table 7-255. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 298 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 290 01 595



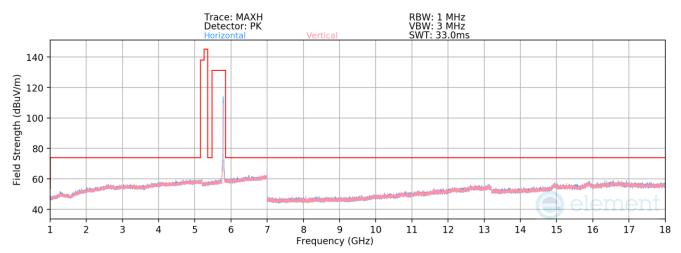

Plot 7-916. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 157)


Mode:802.11nData Rate:MCS0Distance of Measurements:3 MetersOperating Frequency:5785MHzChannel:157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11570.00	Average	V	•		-83.21	16.74	40.53	53.98	-13.45
*	11570.00	Peak	V	-	-	-72.62	16.75	51.13	73.98	-22.85
	17355.00	Peak	Н	1	-	-73.46	24.47	58.01	68.23	-10.22

Table 7-256. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 299 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 299 01 393



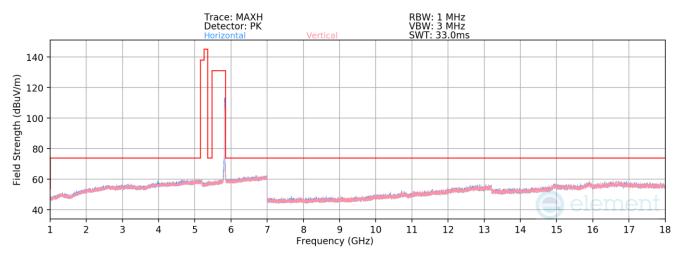

Plot 7-917. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11n - Ch. 165)


Mode:802.11nData Rate:MCS0Distance of Measurements:3 MetersOperating Frequency:5825MHzChannel:165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11650.00	Average	Н	•		-83.76	17.25	40.49	53.98	-13.49
*	11650.00	Peak	Н	-	-	-72.71	17.25	51.54	73.98	-22.44
	17475.00	Peak	٧	•	•	-73.48	25.10	58.62	68.23	-9.61

Table 7-257. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 300 of 595
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 300 01 595



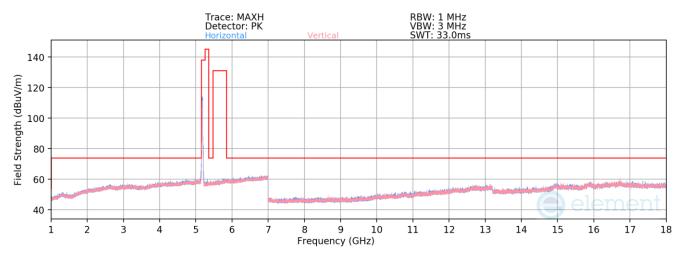

Plot 7-918. Radiated Spurious Emissions above 1GHz Antenna WF5b (802.11ax(SU) - Ch. 36)

Mode:802.11ax(SU)Data Rate:MCS0Distance of Measurements:3 MetersOperating Frequency:5180MHzChannel:36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10360.00	Peak	Н	-	-	-71.74	15.15	50.41	68.23	-17.82
*	15540.00	Average	V	-	-	-85.61	23.59	44.98	53.98	-9.00
*	15540.00	Peak	٧	-	-	-73.86	23.07	56.21	73.98	-17.77

Table 7-258. Radiated Measurements Antenna WF5b

FCC ID: BCGA2836 IC: 579C-A2836	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 301 of 595	
1C2311270067-11-R1.BCG	12/06/202 - 02/20/2024	Tablet Device	Fage 301 01 595	