


**Plot 7-1555. AC Line Conducted Plot with 802.11ax SDM Primary – Ch. 1 (N), with AC/DC Charger**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152000	FINAL	—	29.90	55.88	-25.98	N	GND
0.152000	FINAL	53.29	—	65.88	-12.59	N	GND
0.186000	FINAL	—	35.36	54.21	-18.86	N	GND
0.186000	FINAL	52.03	—	64.21	-12.19	N	GND
0.483000	FINAL	—	29.83	46.29	-16.46	N	GND
0.483000	FINAL	37.56	—	56.29	-18.73	N	GND
0.614000	FINAL	36.15	—	56.00	-19.85	N	GND
0.614000	FINAL	—	32.59	46.00	-13.41	N	GND
1.160000	FINAL	32.08	—	56.00	-23.92	N	GND
1.160000	FINAL	—	29.16	46.00	-16.84	N	GND
6.900000	FINAL	—	14.12	50.00	-35.88	N	GND
6.900000	FINAL	23.41	—	60.00	-36.59	N	GND

**Table 7-230. AC Line Conducted Data with 802.11ax SDM Primary – Ch. 1 (N), with AC/DC Charger**

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-13-R1.BCG	Test Dates: 1/8/2024 - 04/05/2024	EUT Type: Tablet Device	Page 564 of 567

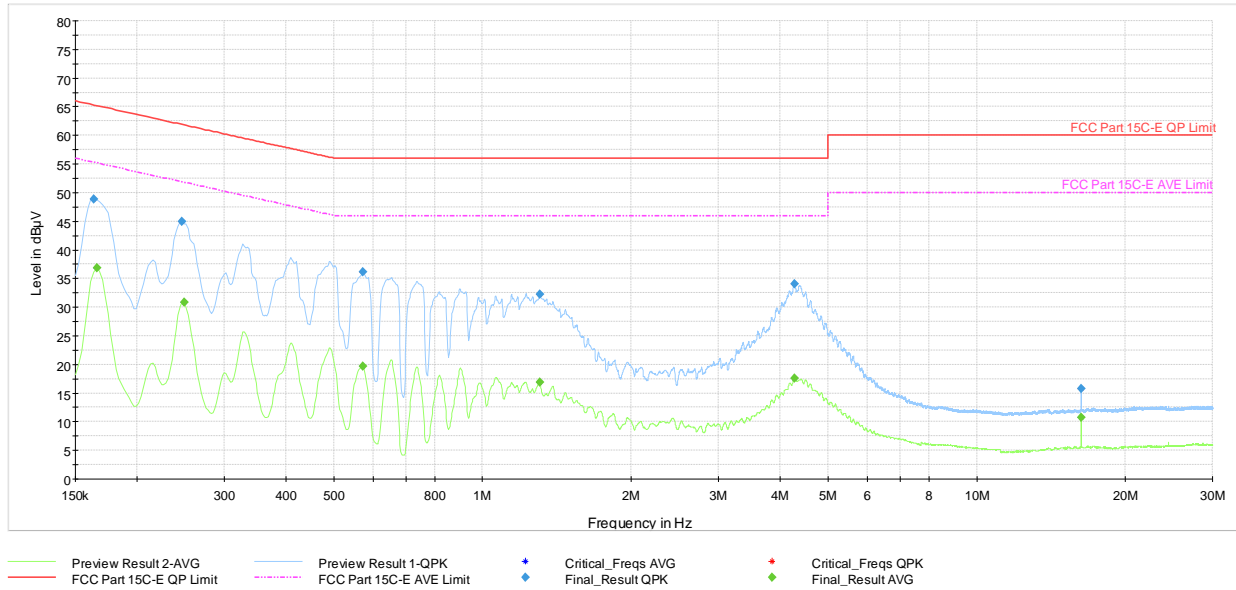


**Plot 7-1556. AC Line Conducted Plot with 802.11ax SDM Diversity – Ch. 1 (L1), with AC/DC Charger**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.163500	FINAL	48.87	—	65.28	-16.42	L1	GND
0.165750	FINAL	—	36.81	55.17	-18.37	L1	GND
0.246750	FINAL	44.92	—	61.87	-16.95	L1	GND
0.249000	FINAL	—	30.80	51.79	-21.00	L1	GND
0.573000	FINAL	36.13	—	56.00	-19.87	L1	GND
0.573000	FINAL	—	19.72	46.00	-26.28	L1	GND
1.304250	FINAL	—	16.90	46.00	-29.10	L1	GND
1.306500	FINAL	32.26	—	56.00	-23.74	L1	GND
4.272000	FINAL	34.11	—	56.00	-21.89	L1	GND
4.278750	FINAL	—	17.54	46.00	-28.46	L1	GND
16.278000	FINAL	15.76	—	60.00	-44.24	L1	GND
16.280250	FINAL	—	10.70	50.00	-39.30	L1	GND

**Table 7-231. AC Line Conducted Data with 802.11ax SDM Diversity – Ch. 1 (L1), with AC/DC Charger**

FCC ID: BCGA2836 IC: 579C-A2836		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Technical Manager
Test Report S/N: 1C2311270067-13-R1.BCG	Test Dates: 1/8/2024 - 04/05/2024	EUT Type: Tablet Device	Page 565 of 567

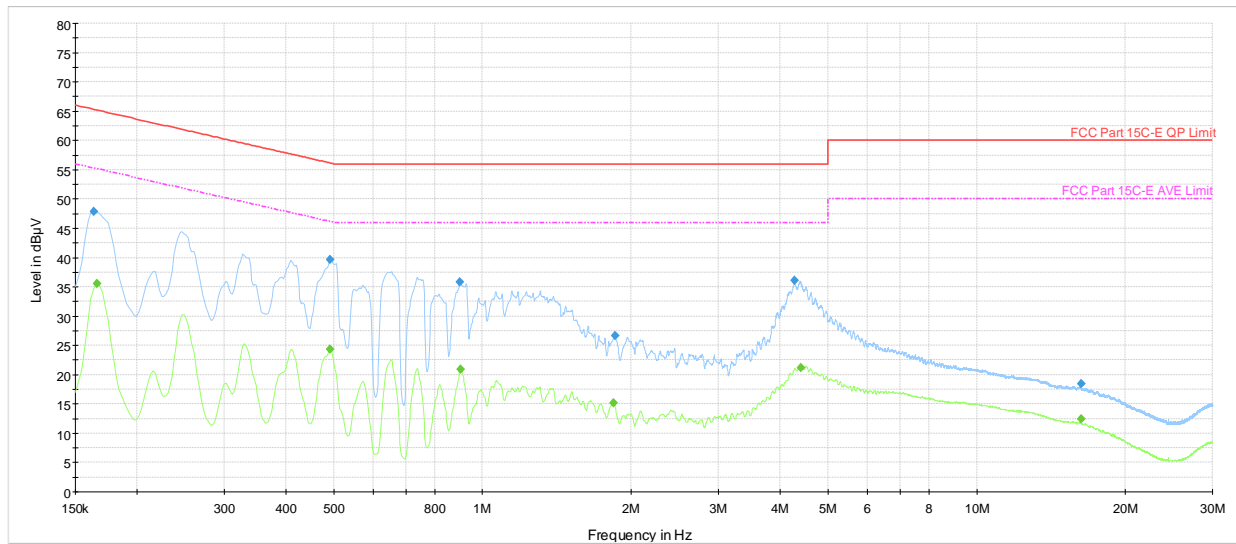

**Plot 7-1557. AC Line Conducted Plot with 802.11ax SDM Diversity – Ch. 1 (N), with AC/DC Charger**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.163500	FINAL	47.86	—	65.28	-17.42	N	GND
0.165750	FINAL	—	35.62	55.17	-19.55	N	GND
0.492000	FINAL	—	24.32	46.13	-21.81	N	GND
0.492000	FINAL	39.68	—	56.13	-16.46	N	GND
0.899250	FINAL	35.81	—	56.00	-20.19	N	GND
0.903750	FINAL	—	20.91	46.00	-25.09	N	GND
1.837500	FINAL	—	15.19	46.00	-30.81	N	GND
1.855500	FINAL	26.70	—	56.00	-29.30	N	GND
4.281000	FINAL	36.09	—	56.00	-19.91	N	GND
4.407000	FINAL	—	21.21	46.00	-24.79	N	GND
16.284750	FINAL	—	12.49	50.00	-37.51	N	GND
16.284750	FINAL	18.44	—	60.00	-41.56	N	GND

**Table 7-232. AC Line Conducted Data with 802.11ax SDM Diversity – Ch. 1 (N), with AC/DC Charger**

FCC ID: BCGA2836 IC: 579C-A2836		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270067-13-R1.BCG	Test Dates: 1/8/2024 - 04/05/2024	EUT Type: Tablet Device	Page 566 of 567

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2836** and **IC: 579C-A2836** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

<b>FCC ID:</b> BCGA2836 <b>IC:</b> 579C-A2836		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270067-13-R1.BCG	<b>Test Dates:</b> 1/8/2024 - 04/05/2024	<b>EUT Type:</b> Tablet Device	Page 567 of 567

V 10.5 12/15/2021