



Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 4DH5 / SISO / Core 1 / iPA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	2157.800	≥500	1657.800	Complied
Middle	2151.800	≥500	1651.800	Complied
Top	2145.900	≥500	1645.900	Complied

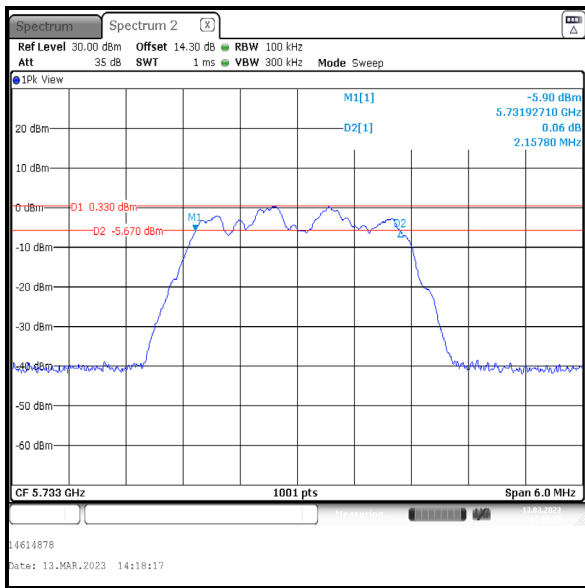

Bottom Channel

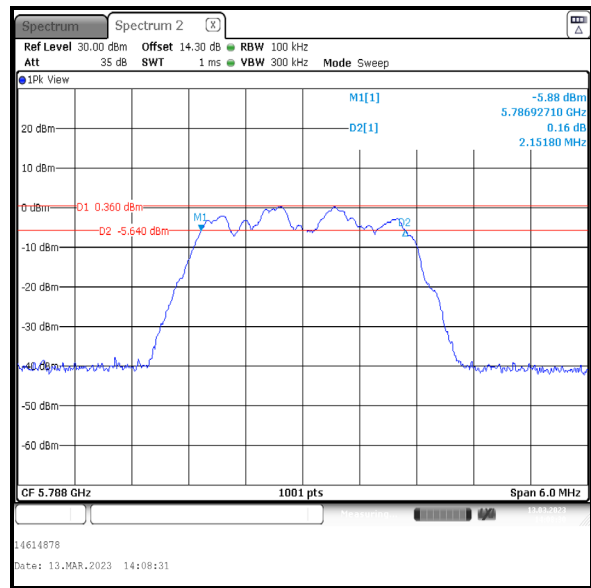

Middle Channel

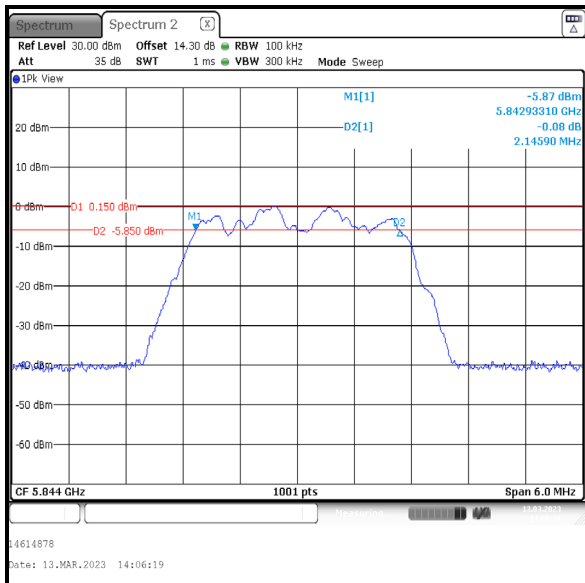


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 4DH5 / SISO / Core 1 / ePA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	2151.800	≥500	1651.800	Complied
Middle	2133.900	≥500	1633.900	Complied
Top	2145.900	≥500	1645.900	Complied

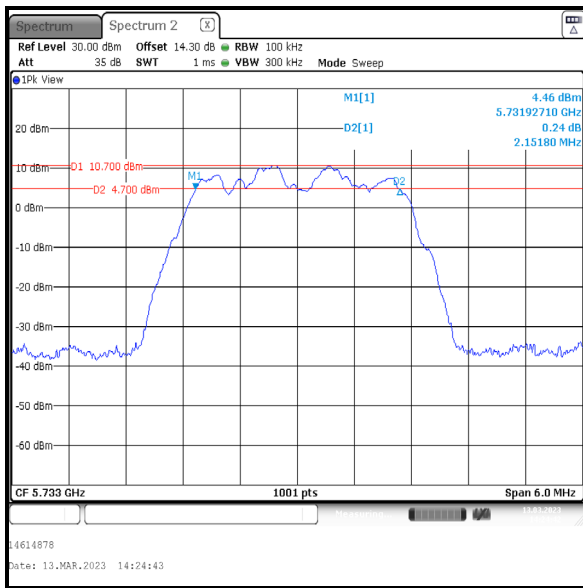

Bottom Channel

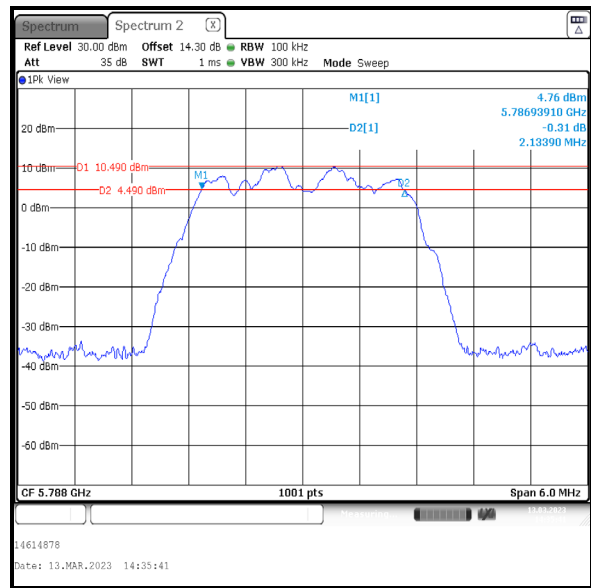

Middle Channel

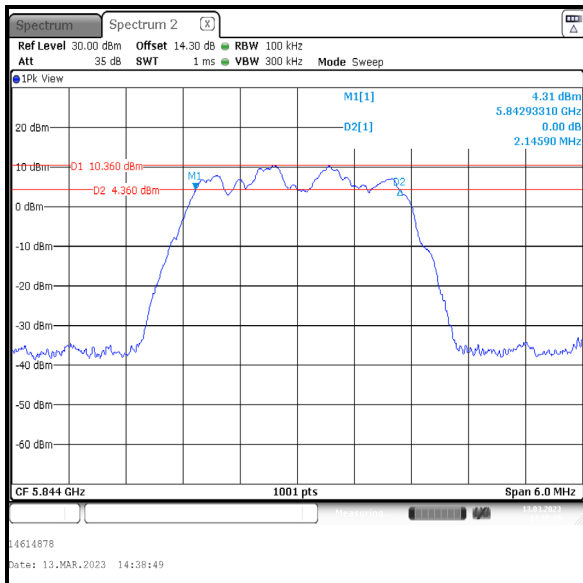


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 8DH5 / SISO / Core 1 / iPA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	4206.000	≥500	3706.000	Complied
Middle	4206.000	≥500	3706.000	Complied
Top	4206.000	≥500	3706.000	Complied

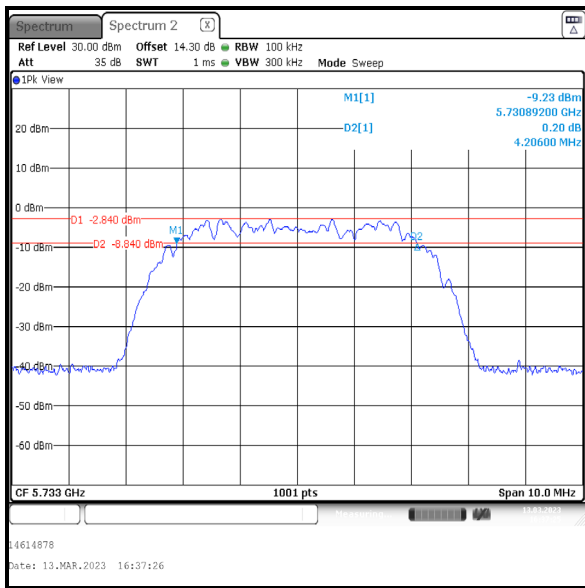

Bottom Channel

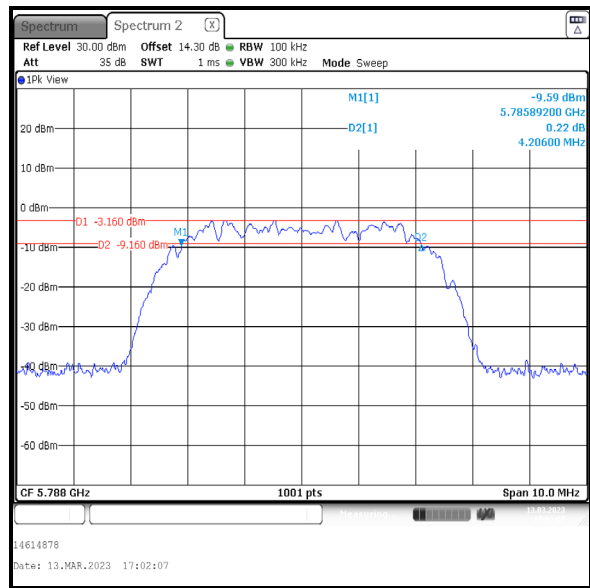

Middle Channel

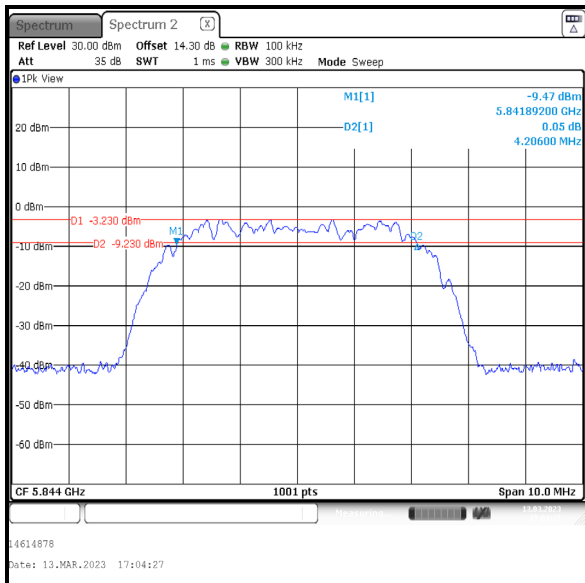


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 8DH5 / SISO / Core 1 / ePA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	4206.000	≥500	3706.000	Complied
Middle	4206.000	≥500	3706.000	Complied
Top	4206.000	≥500	3706.000	Complied

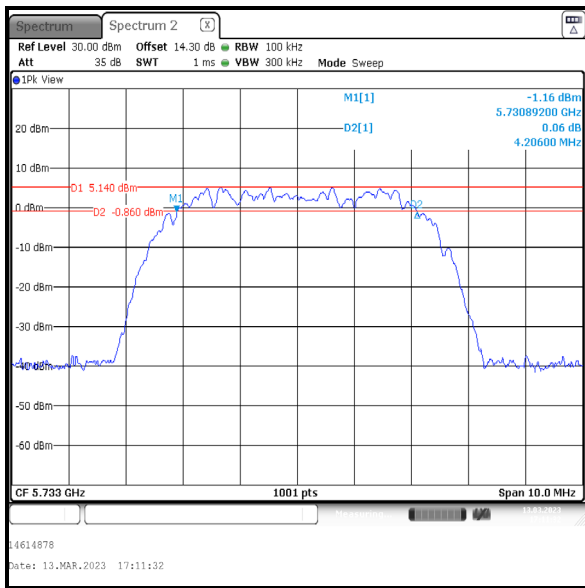

Bottom Channel

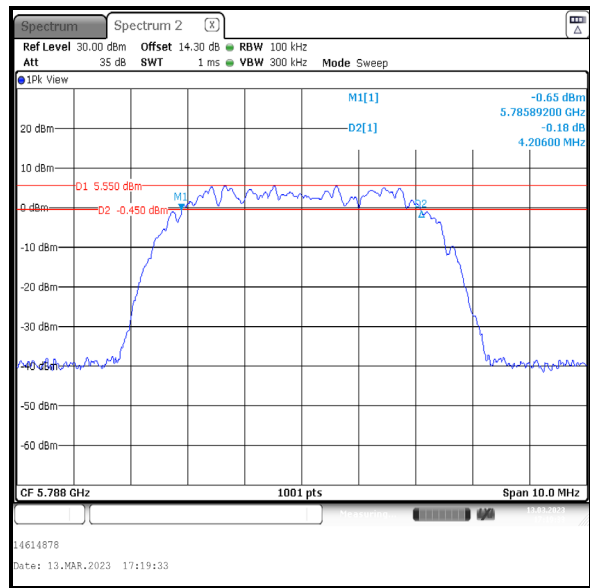

Middle Channel

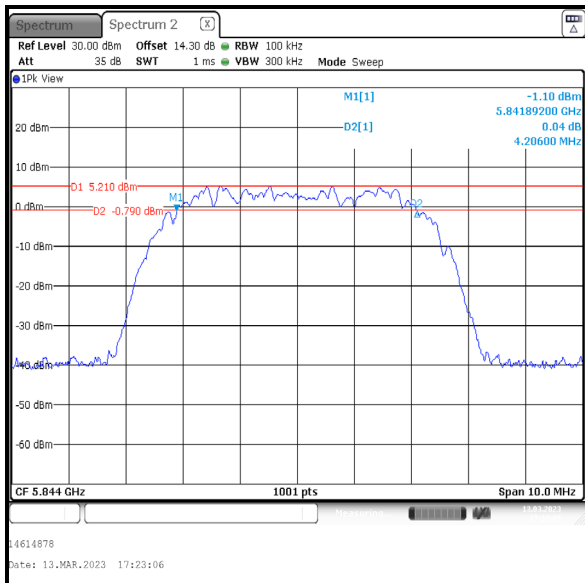


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: DH5 / Beamforming / Core 0 / iPA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	575.400	≥500	75.400	Complied
Middle	575.400	≥500	75.400	Complied
Top	555.400	≥500	55.400	Complied

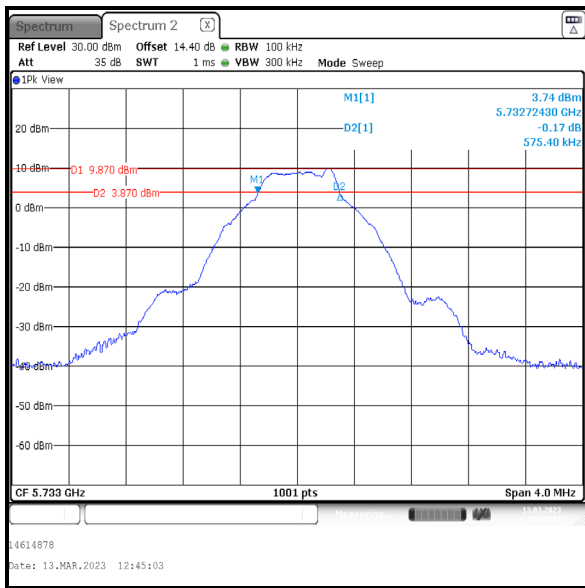

Bottom Channel

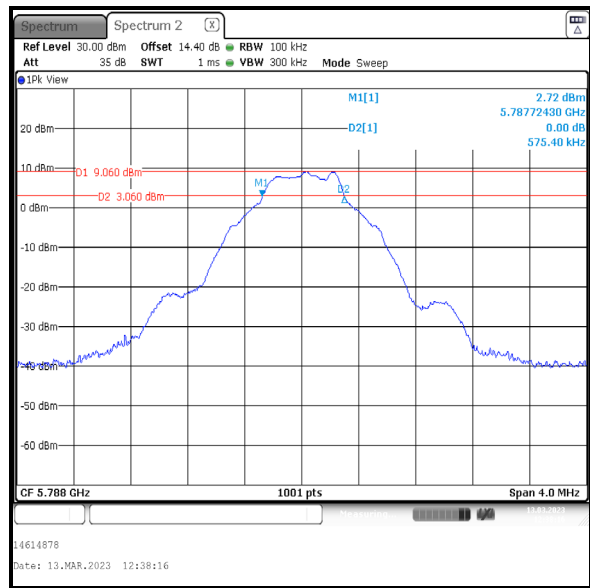

Middle Channel

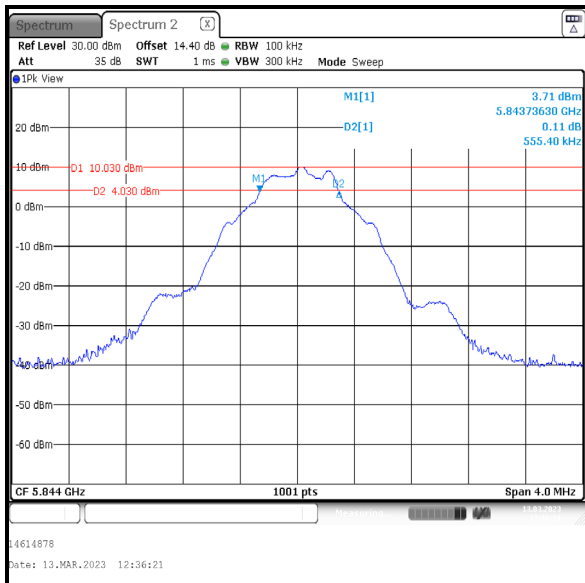


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: DH5 / Beamforming / Core 1 / iPA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	575.400	≥500	75.400	Complied
Middle	575.400	≥500	75.400	Complied
Top	547.500	≥500	47.500	Complied

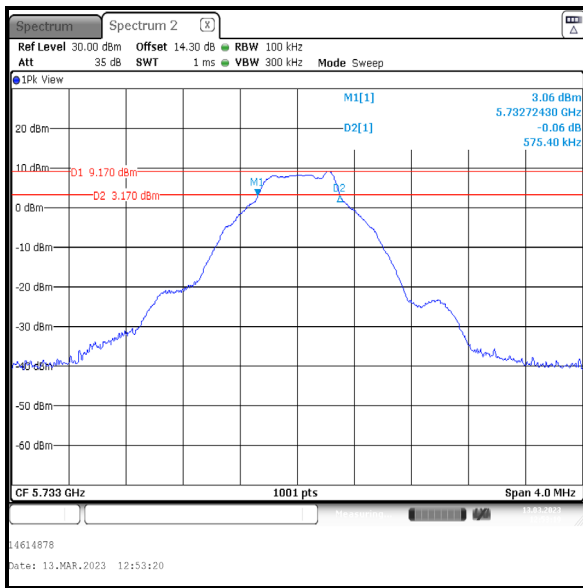

Bottom Channel

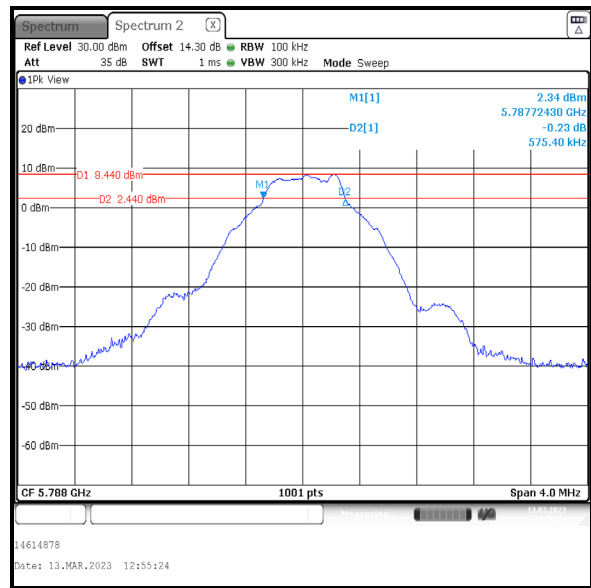

Middle Channel

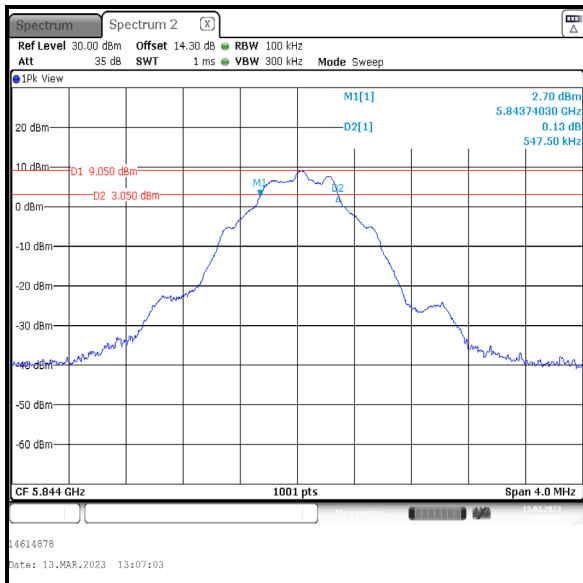


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 4DH5 / Beamforming / Core 0 / iPA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	2137.900	≥500	1637.900	Complied
Middle	2139.900	≥500	1639.900	Complied
Top	2139.900	≥500	1639.900	Complied

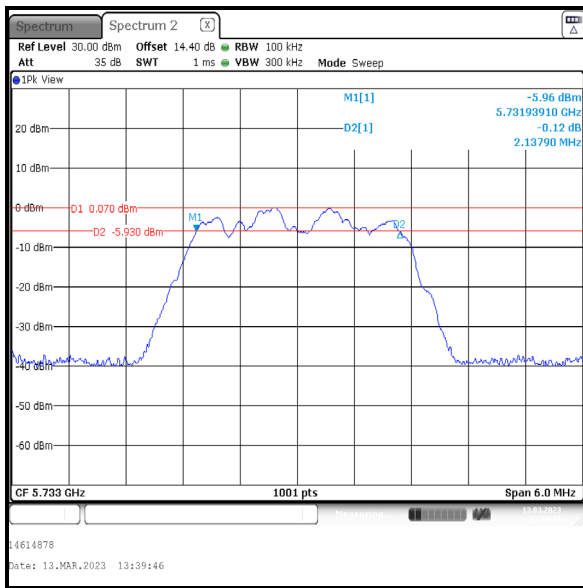

Bottom Channel

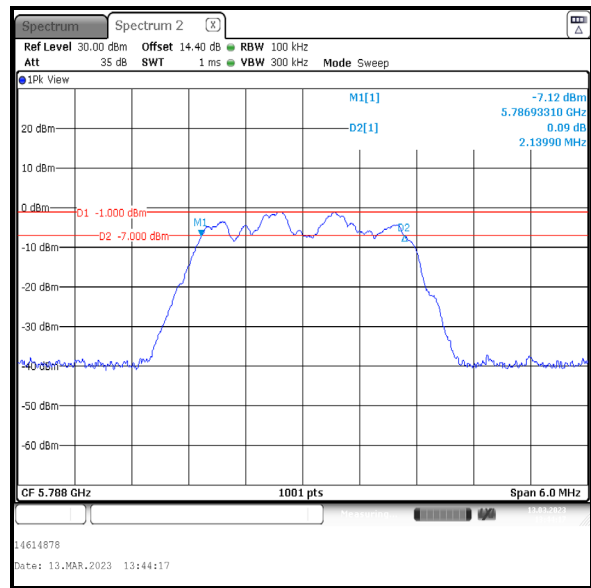

Middle Channel

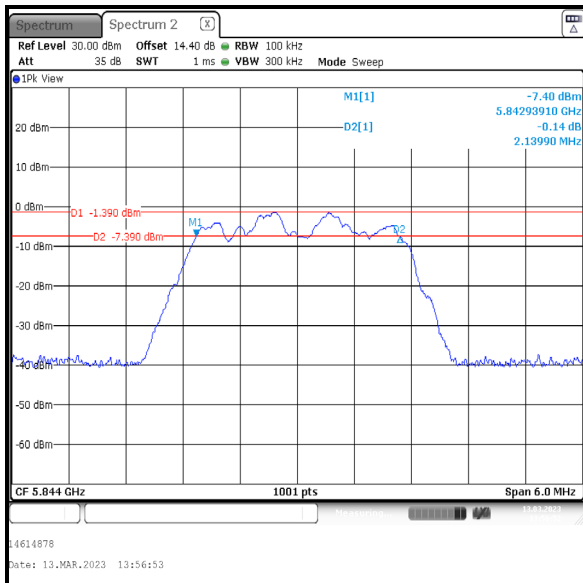


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 4DH5 / Beamforming / Core 1 / iPA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	2157.800	≥500	1657.800	Complied
Middle	2157.800	≥500	1657.800	Complied
Top	2139.900	≥500	1639.900	Complied

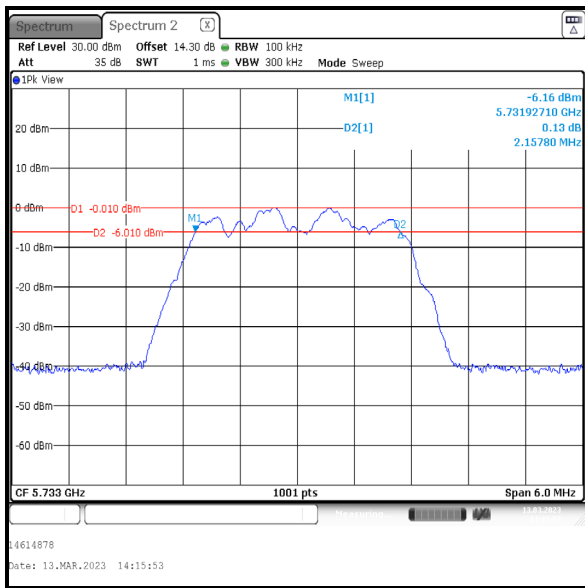

Bottom Channel

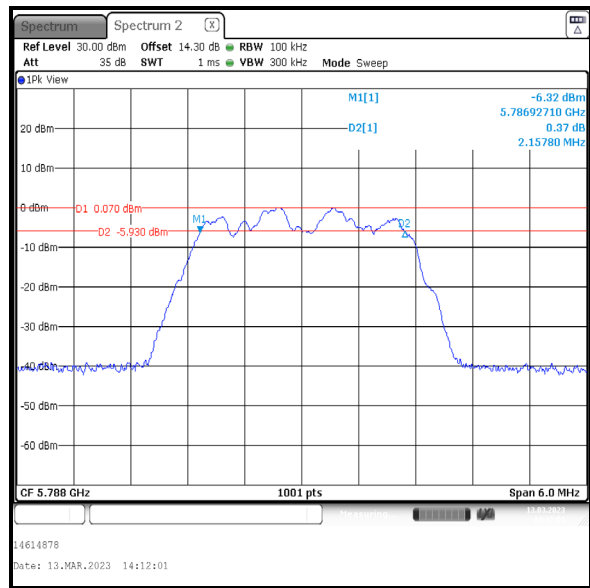

Middle Channel

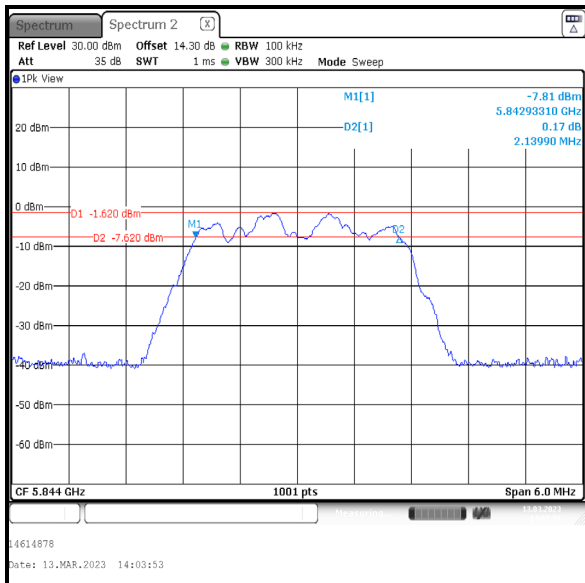


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 4DH5 / Beamforming / Core 0 / ePA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	2145.900	≥500	1645.900	Complied
Middle	2145.900	≥500	1645.900	Complied
Top	2145.900	≥500	1645.900	Complied

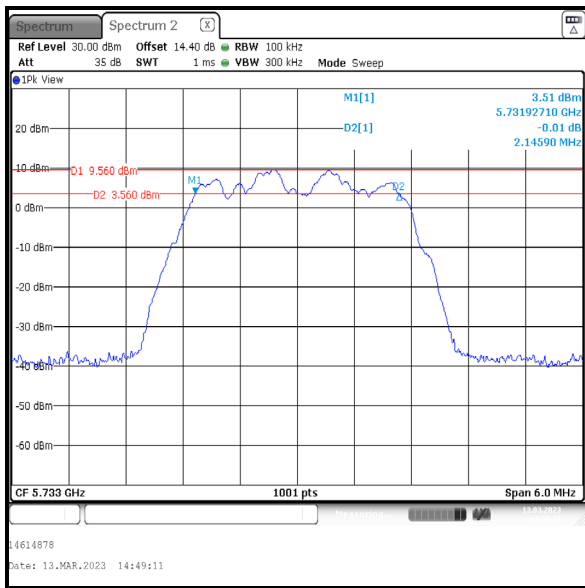

Bottom Channel

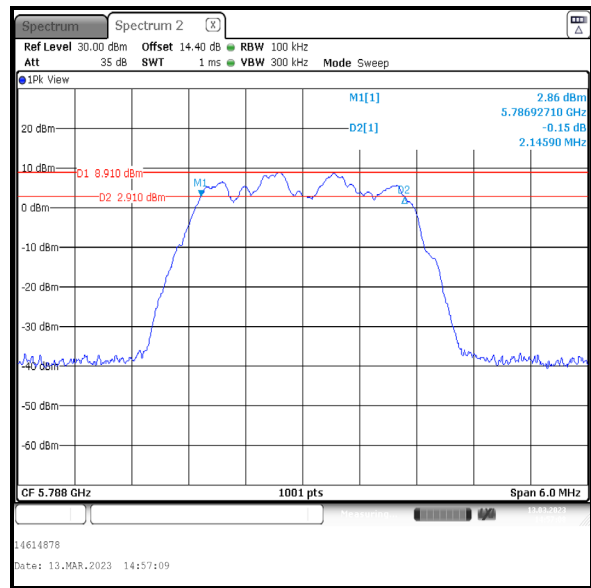

Middle Channel

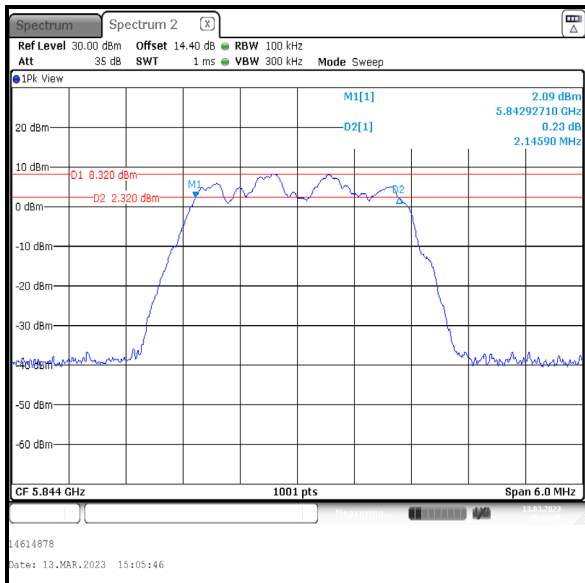


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 4DH5 / Beamforming / Core 1 / ePA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	2151.800	≥500	1651.800	Complied
Middle	2145.900	≥500	1645.900	Complied
Top	2145.900	≥500	1645.900	Complied

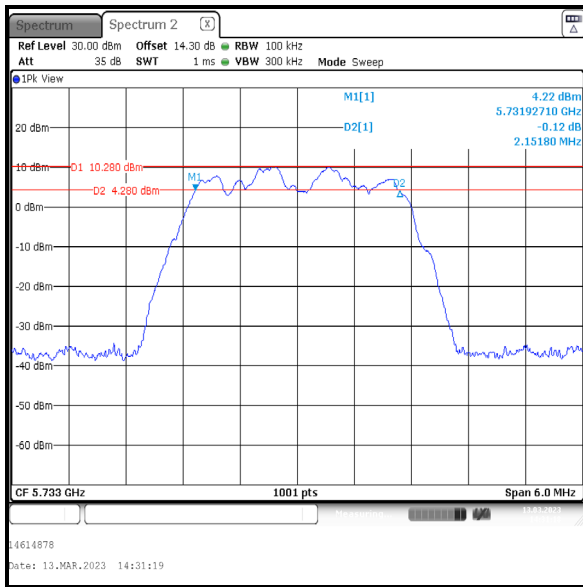

Bottom Channel

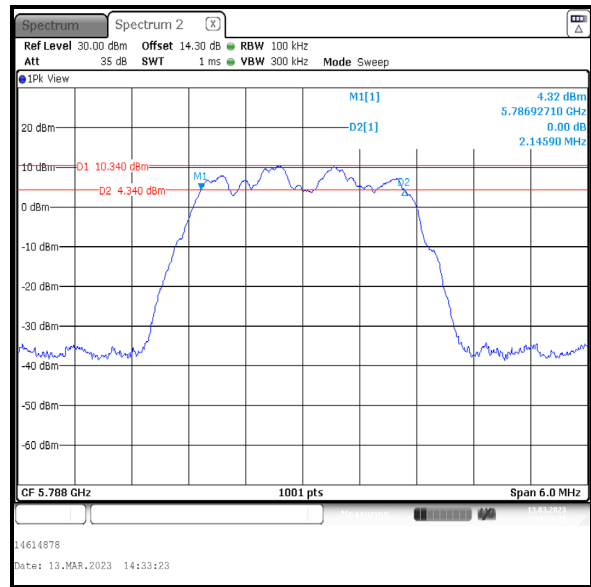

Middle Channel

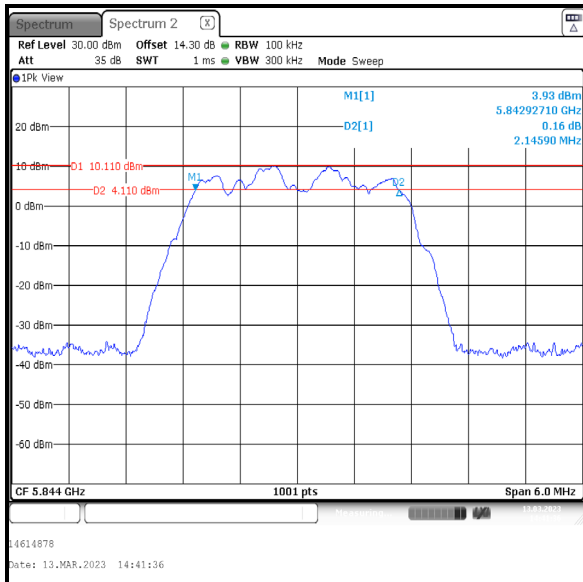


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 8DH5 / Beamforming / Core 0 / iPA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	4209.000	≥500	3709.000	Complied
Middle	4206.000	≥500	3706.000	Complied
Top	4206.000	≥500	3706.000	Complied

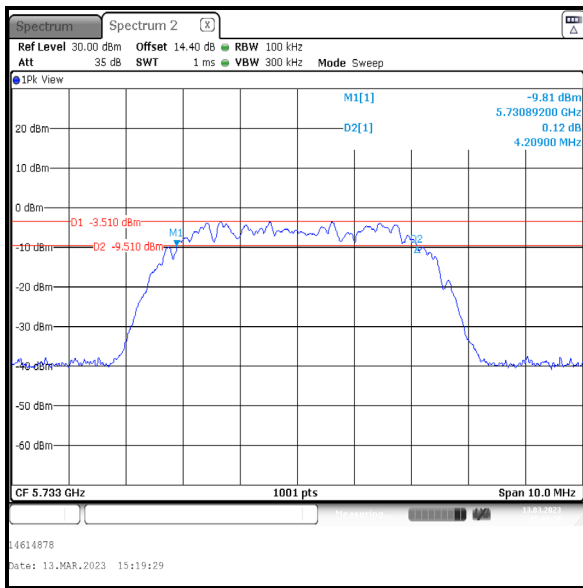

Bottom Channel

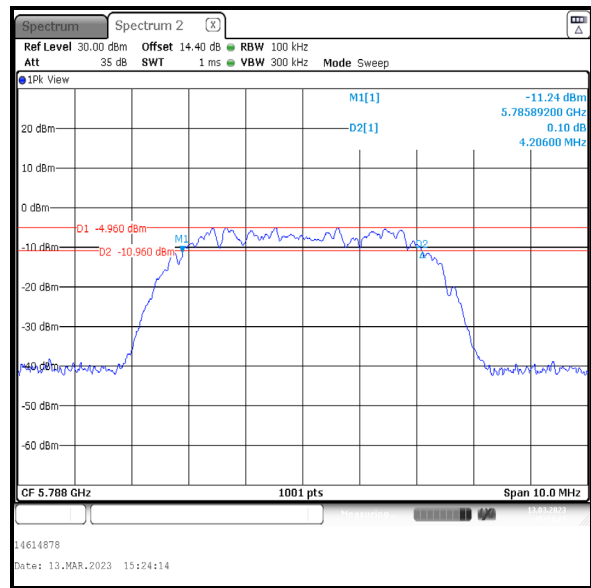

Middle Channel

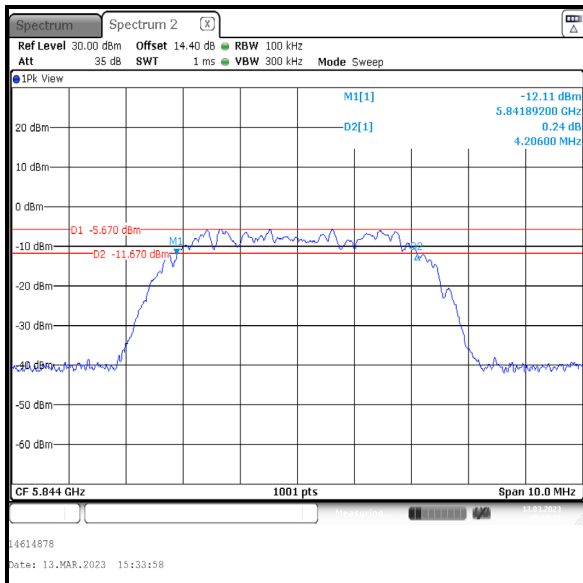


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 8DH5 / Beamforming / Core 1 / iPA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	4206.000	≥500	3706.000	Complied
Middle	4306.000	≥500	3806.000	Complied
Top	4356.000	≥500	3856.000	Complied

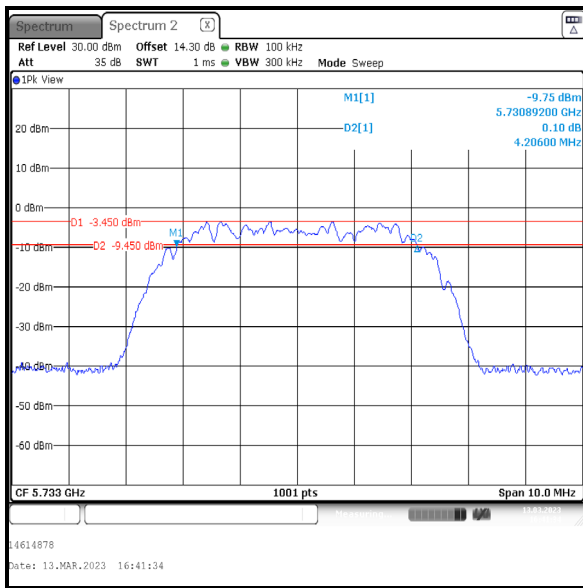

Bottom Channel

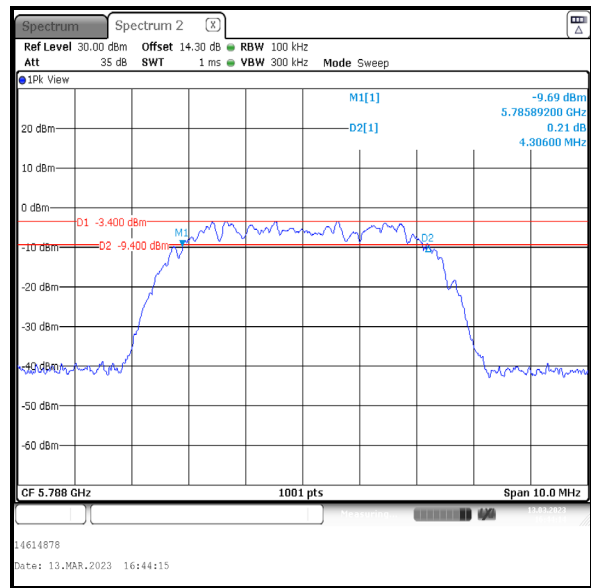

Middle Channel

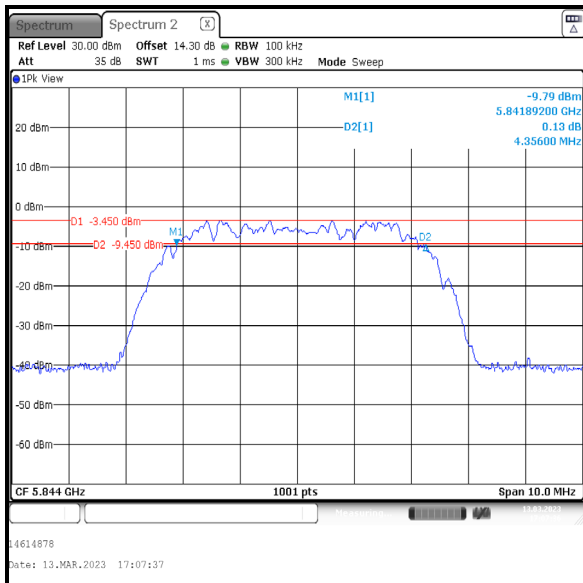


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 8DH5 / Beamforming / Core 0 / ePA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	4206.000	≥500	3706.000	Complied
Middle	4206.000	≥500	3706.000	Complied
Top	4196.000	≥500	3696.000	Complied

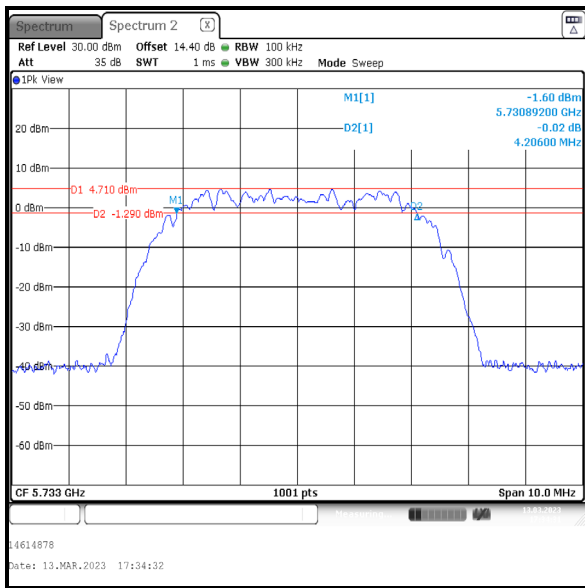

Bottom Channel

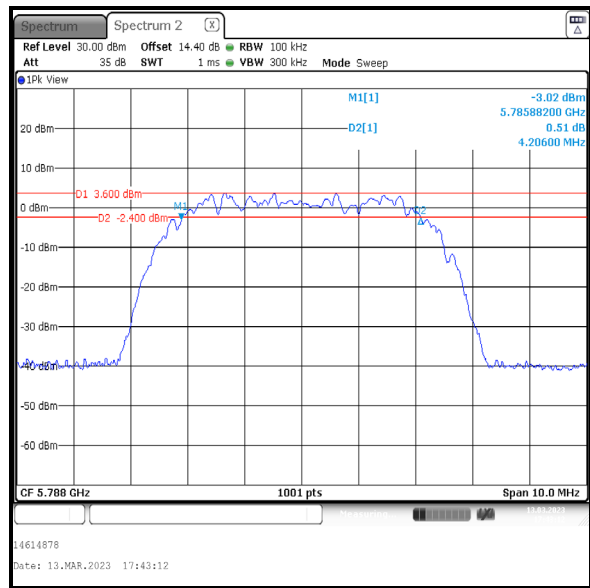

Middle Channel

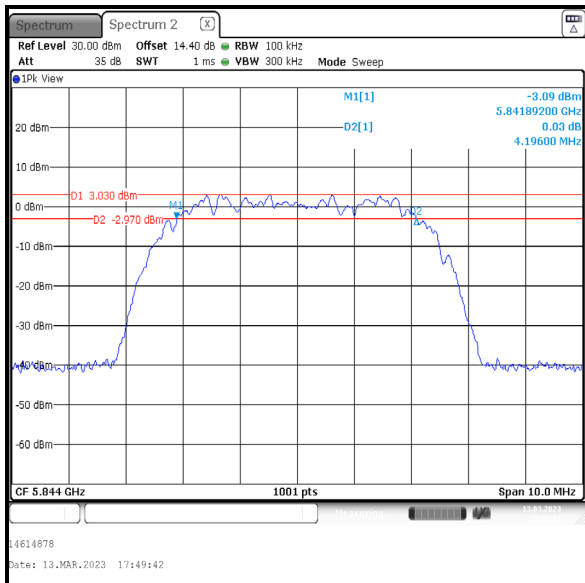


Top Channel


Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)

Results: 8DH5 / Beamforming / Core 1 / ePA


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	4206.000	≥500	3706.000	Complied
Middle	4196.000	≥500	3696.000	Complied
Top	4196.000	≥500	3696.000	Complied

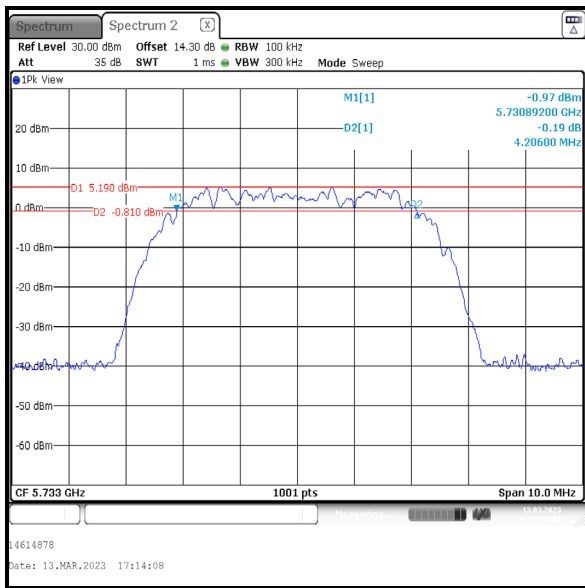

Bottom Channel

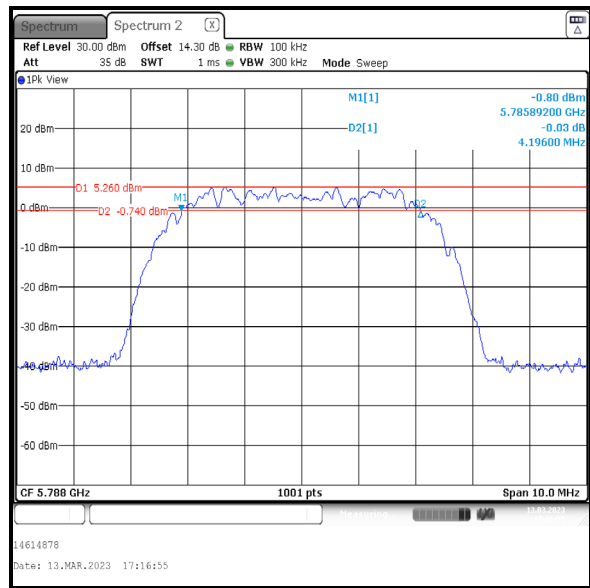

Middle Channel

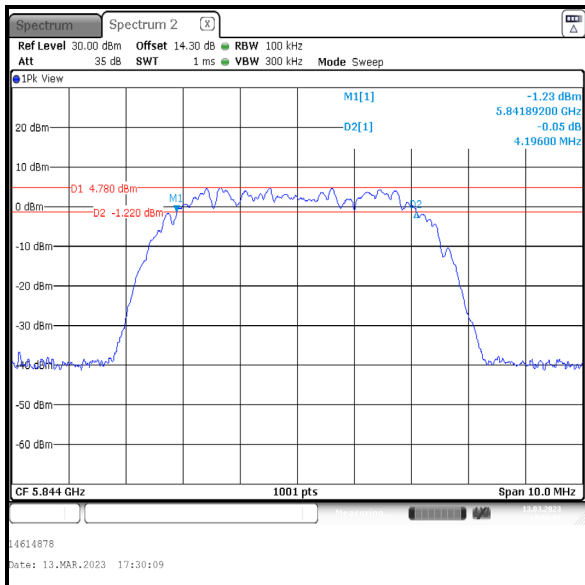

Top Channel

4.4 Transmitter Maximum Conducted Output Power

4.4.1 5.15-5.25 GHz band

Test Summary:

Test Engineers:	Luis Pazos Perez & Jose Bayona	Test Dates:	07 March 2023 to 13 March 2023
Test Sample Serial Number:	RHKHHQ9YHK		

FCC Reference:	Part 15.407(a)(1)(iv)
Test Method Used:	KDB 789033 D02 Section II.E.2.b) and II.E.2.d)

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	32 to 42


Note(s):

- For conducted power tests where the duty cycle is >98%, the measurements were performed using a signal analyser in accordance with FCC KDB 789033 II.E.2.b) Method SA-1. Where the duty cycle is <98%, the measurements were performed in accordance with FCC KDB 789033 II.E.2.d) Method SA-2. The signal analyser's integration function was used to integrate across the 26 dB emission bandwidth. The resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. An RMS detector was used and sweep time was set to auto and 500 traces performed. The span was set to encompass the entire 26 dB emission bandwidth. The channel power results are recorded in the tables below.
- For DH5 where the EUT was transmitting at <98% duty cycle, the calculated duty cycle in Section 4.1 was added to the measured power in order to compute the average power during the actual transmission time.
- The Part 15.407(a)(1)(iv) limit shall not exceed 250 mW (24.0 dBm).
- For Beamforming modes, conducted power was measured on both ports and then combined using the measure-and-sum method stated in FCC KDB 662911 D01 Section E)1).
- For details on antenna gains refer to Section 3.4 of this test report.
- For SISO modes of operation, the antenna gain is < 6 dBi.
- For Beamforming modes of operation presented in this section of the test report, the EUT has a directional antenna gain of 8.5 dBi. In accordance with Part 15.407(a)(1)(iv), the limit was reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 24.0 dBm has been reduced by 2.5 dB to 21.5 dBm.
- The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.


Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)

Results: DH5 / SISO / Core 0 / iPA


Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5162	8.7	1.1	9.8	24.0	14.2	Complied
Middle	5203	8.9	1.1	10.0	24.0	14.0	Complied
Top	5245	8.9	1.1	10.0	24.0	14.0	Complied

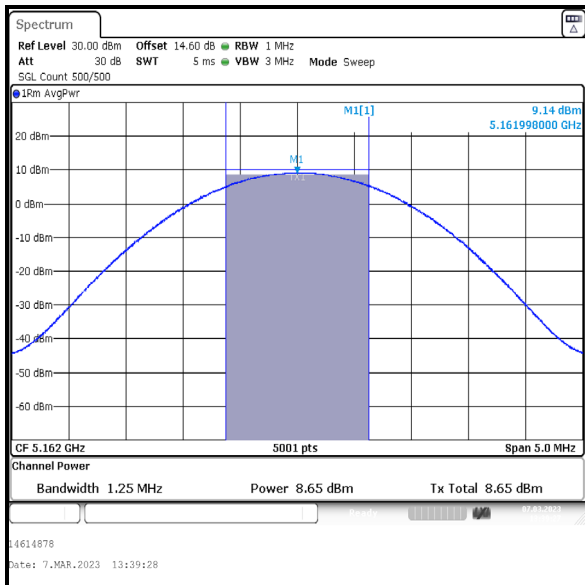

Bottom Channel

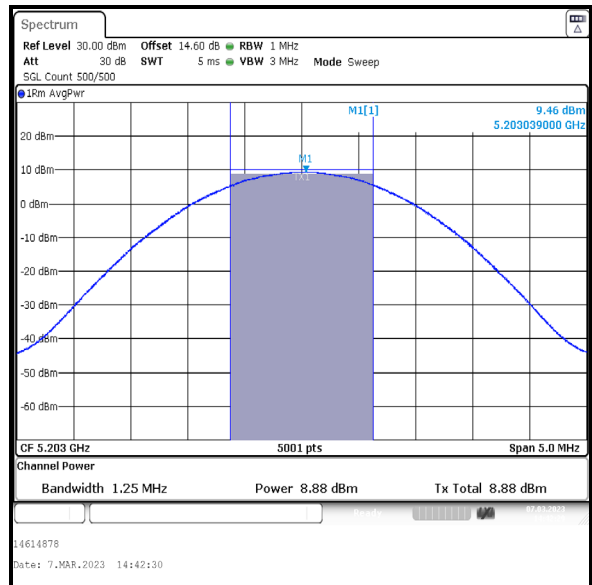

Middle Channel

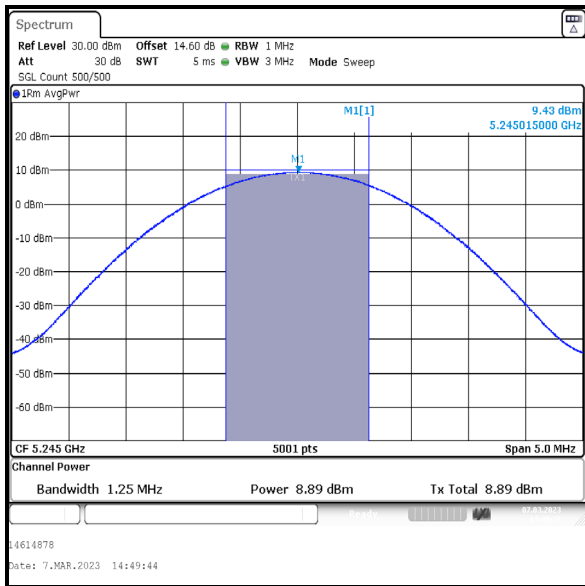


Top Channel


Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)

Results: 4DH5 / SISO / Core 0 / iPA


Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5162	3.6	24.0	20.4	Complied
Middle	5203	3.7	24.0	20.3	Complied
Top	5245	3.8	24.0	20.2	Complied

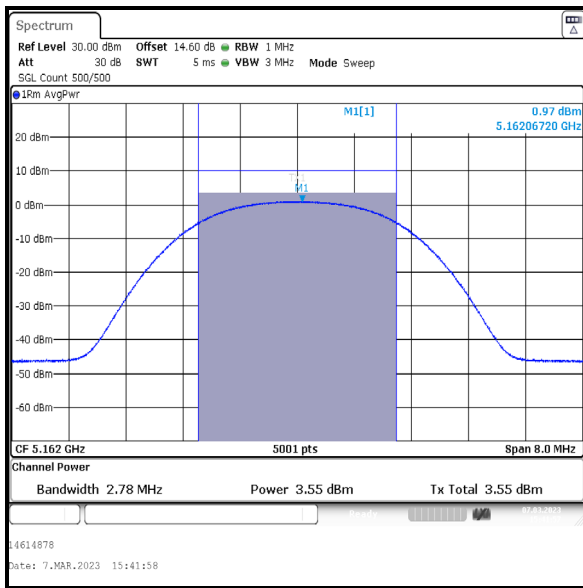

Bottom Channel

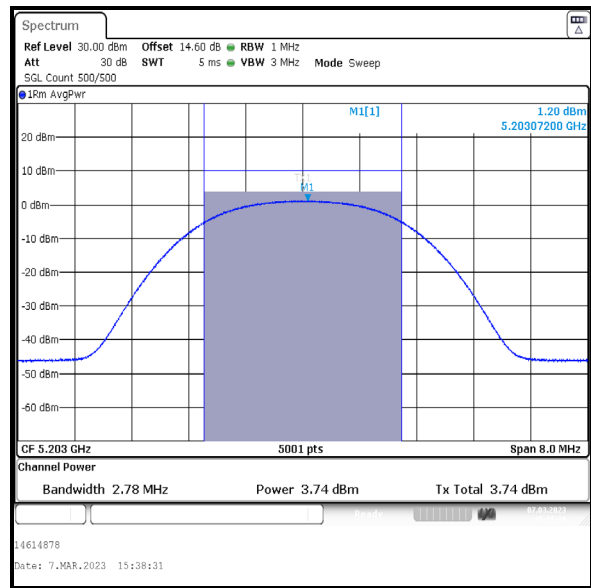

Middle Channel

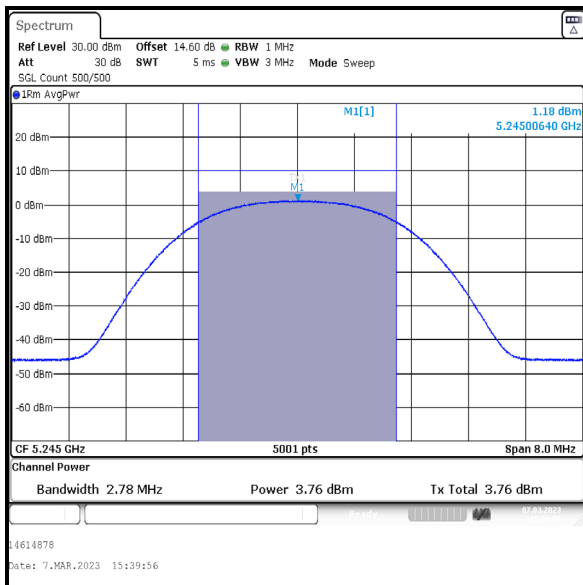


Top Channel


Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)

Results: 4DH5 / SISO / Core 0 / ePA


Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5162	11.8	24.0	12.2	Complied
Middle	5203	11.7	24.0	12.3	Complied
Top	5245	11.9	24.0	12.1	Complied

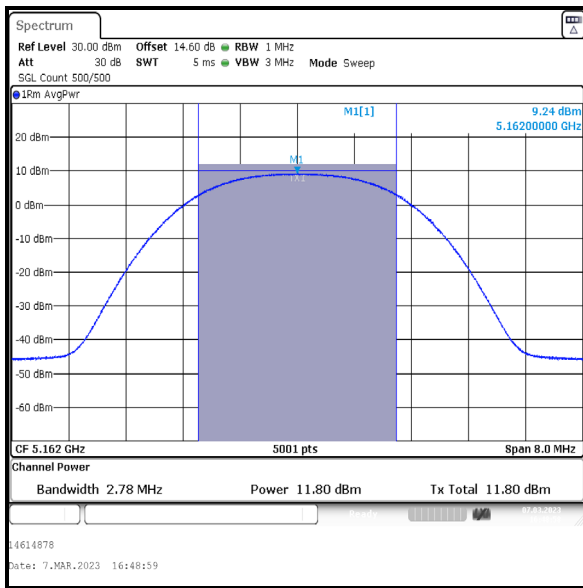

Bottom Channel

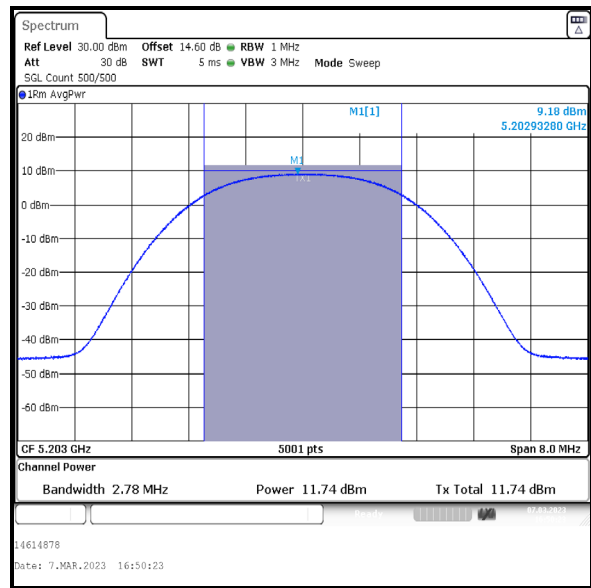

Middle Channel

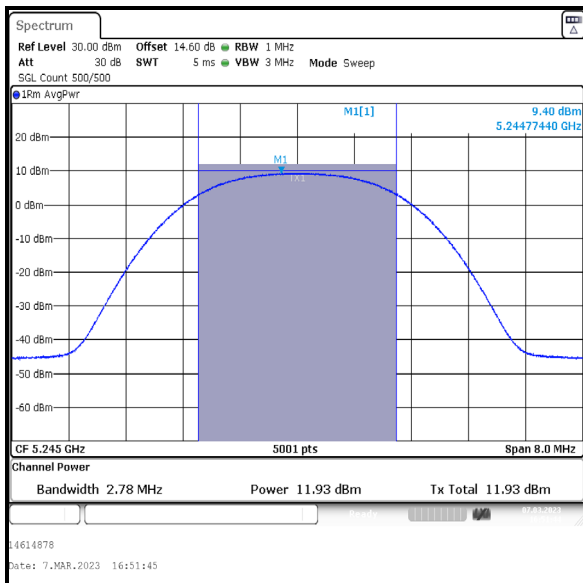


Top Channel


Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)

Results: 8DH5 / SISO / Core 0 / iPA


Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5162	4.0	24.0	20.0	Complied
Middle	5203	4.0	24.0	20.0	Complied
Top	5245	4.0	24.0	20.0	Complied

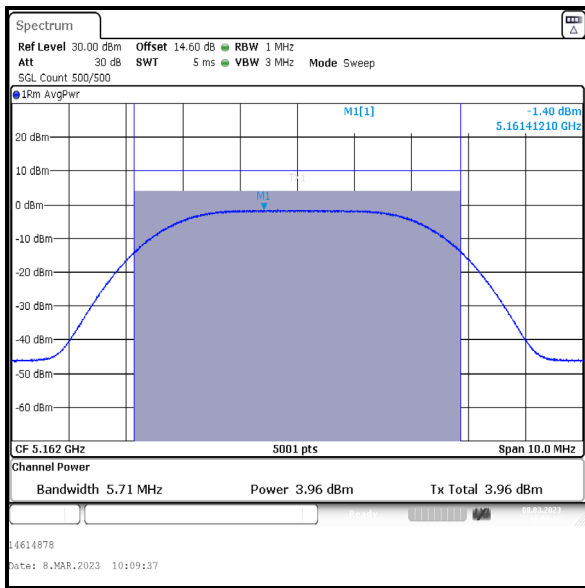

Bottom Channel

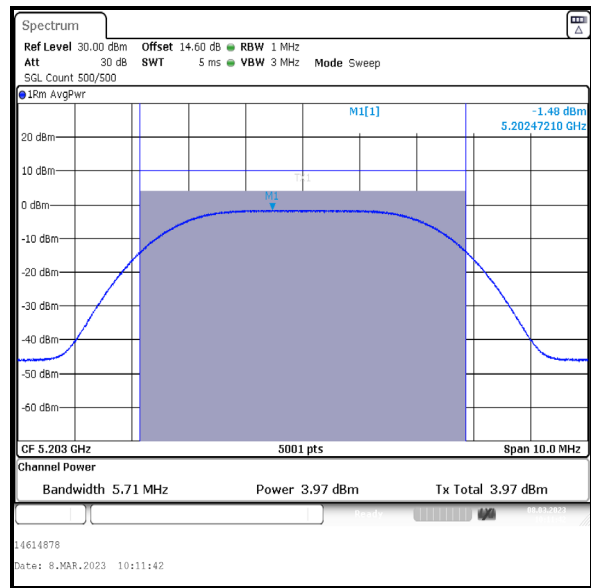

Middle Channel

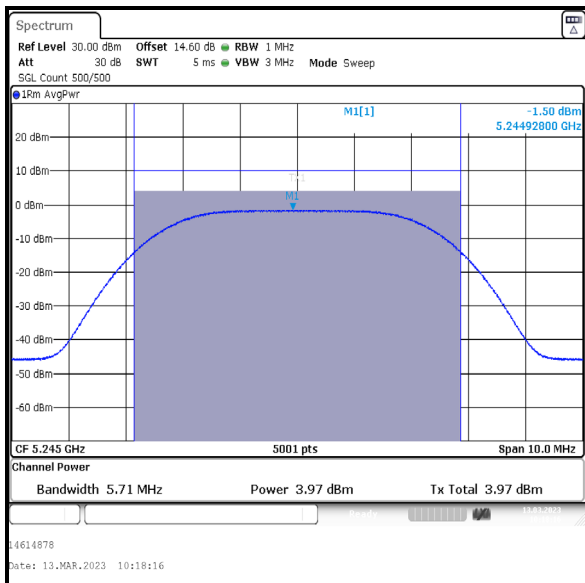


Top Channel


Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)

Results: 8DH5 / SISO / Core 0 / ePA


Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5162	12.2	24.0	11.8	Complied
Middle	5203	12.2	24.0	11.8	Complied
Top	5245	12.5	24.0	11.5	Complied

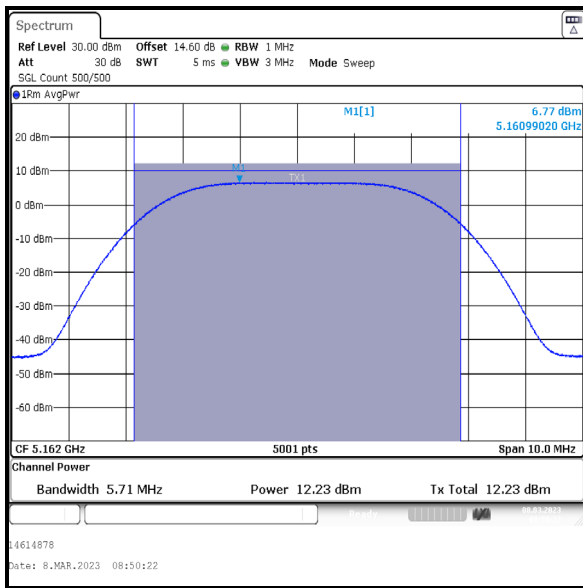

Bottom Channel

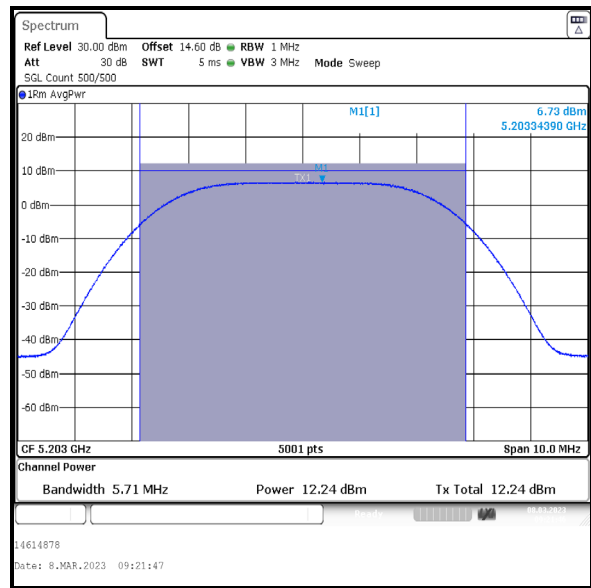

Middle Channel

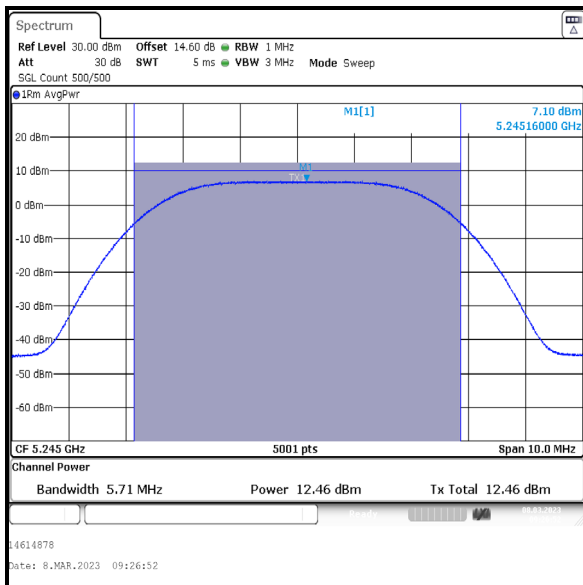

Top Channel