



| Parameter | Results | | |
|--------------------------------|---------|---------|-------|
| U-NII Band | 6 | 6 | 6 |
| Channel Number | 101 | 101 | 101 |
| Bandwidth (MHz) | 20 | 20 | 20 |
| DUT Centre Frequency (MHz) | 6455 | 6455 | 6455 |
| AWGN Centre Frequency (MHz) | 6455 | 6455 | 6455 |
| AWGN Signal Power (dBm) | -70 | -67 | -66 |
| Antenna Gain (dBi) | 4.1 | 4.1 | 4.1 |
| Adjusted Power (dBm) | -74.1 | -71.1 | -70.1 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 381 - U-NII-6, Minimum Bandwidth



Figure 155 - U-NII-6, Minimum Bandwidth



| Parameter | Results | | |
|--------------------------------|---------|---------|-------|
| U-NII Band | 6 | 6 | 6 |
| Channel Number | 111 | 111 | 111 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6505 | 6505 | 6505 |
| AWGN Centre Frequency (MHz) | 6430 | 6430 | 6430 |
| AWGN Signal Power (dBm) | -71 | -66 | -65 |
| Antenna Gain (dBi) | 4.1 | 4.1 | 4.1 |
| Adjusted Power (dBm) | -75.1 | -70.1 | -69.1 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 382 - U-NII-6, Maximum Bandwidth (AWGN Low)

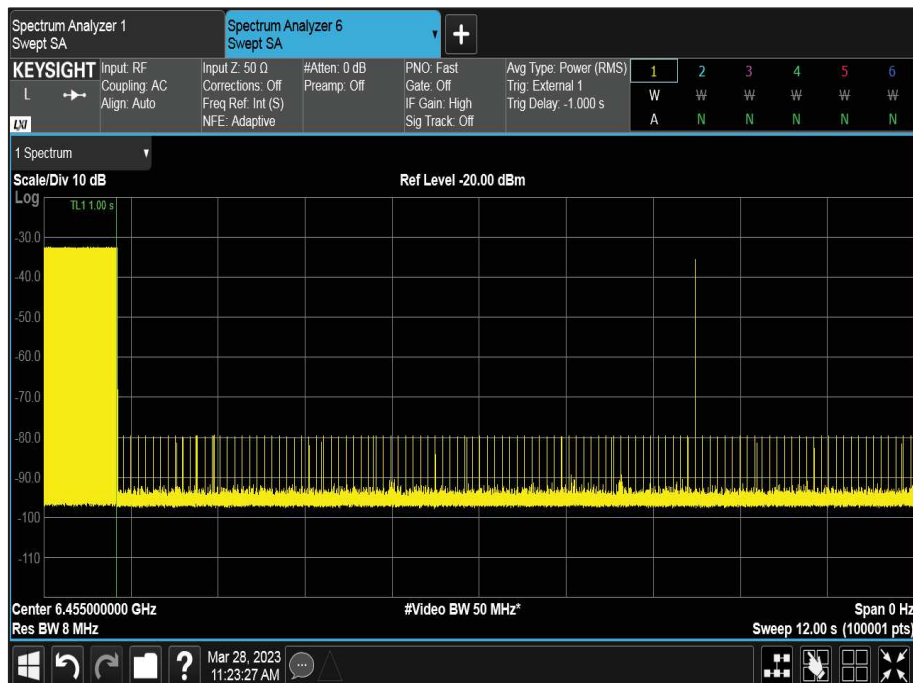


Figure 156 - U-NII-6, Minimum Bandwidth (AWGN Low)



| Parameter | Results | | |
|--------------------------------|---------|---------|-------|
| U-NII Band | 6 | 6 | 6 |
| Channel Number | 111 | 111 | 111 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6505 | 6505 | 6505 |
| AWGN Centre Frequency (MHz) | 6505 | 6505 | 6505 |
| AWGN Signal Power (dBm) | -71 | -67 | -66 |
| Antenna Gain (dBi) | 4.1 | 4.1 | 4.1 |
| Adjusted Power (dBm) | -75.1 | -71.1 | -70.1 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 383 - U-NII-6, Maximum Bandwidth (AWGN Mid)

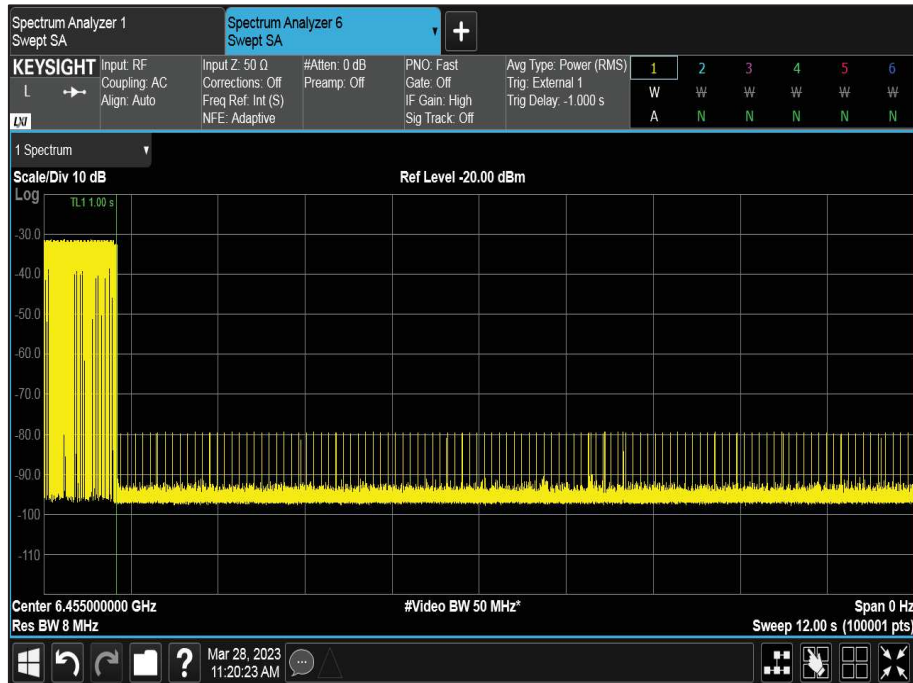


Figure 157 - U-NII-6, Minimum Bandwidth (AWGN Mid)



| Parameter | Results | | |
|--------------------------------|---------|---------|-------|
| U-NII Band | 6 | 6 | 6 |
| Channel Number | 111 | 111 | 111 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6505 | 6505 | 6505 |
| AWGN Centre Frequency (MHz) | 6580 | 6580 | 6580 |
| AWGN Signal Power (dBm) | -69 | -63 | -62 |
| Antenna Gain (dBi) | 4.1 | 4.1 | 4.1 |
| Adjusted Power (dBm) | -73.1 | -67.1 | -66.1 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 384 - U-NII-6, Maximum Bandwidth (AWGN High)

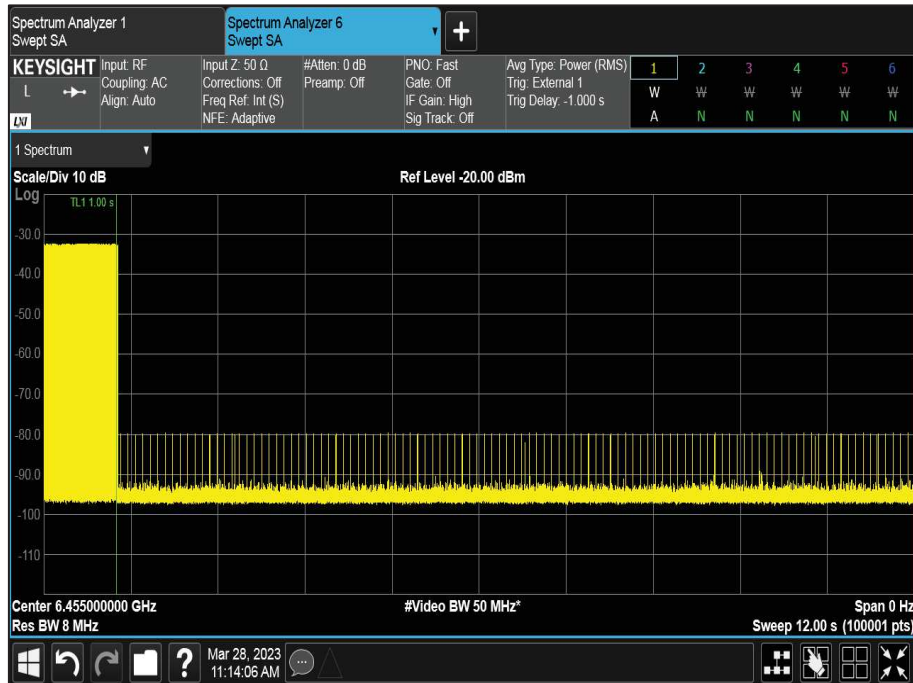


Figure 158 - U-NII-6, Minimum Bandwidth (AWGN High)



| Parameter | Results | | |
|--------------------------------|---------|---------|--------|
| U-NII Band | 7 | 7 | 7 |
| Channel Number | 133 | 133 | 133 |
| Bandwidth (MHz) | 20 | 20 | 20 |
| DUT Centre Frequency (MHz) | 6615 | 6615 | 6615 |
| AWGN Centre Frequency (MHz) | 6615 | 6615 | 6615 |
| AWGN Signal Power (dBm) | -72 | -66 | -65 |
| Antenna Gain (dBi) | 5.03 | 5.03 | 5.03 |
| Adjusted Power (dBm) | -77.03 | -71.03 | -70.03 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 385 - U-NII-7, Minimum Bandwidth

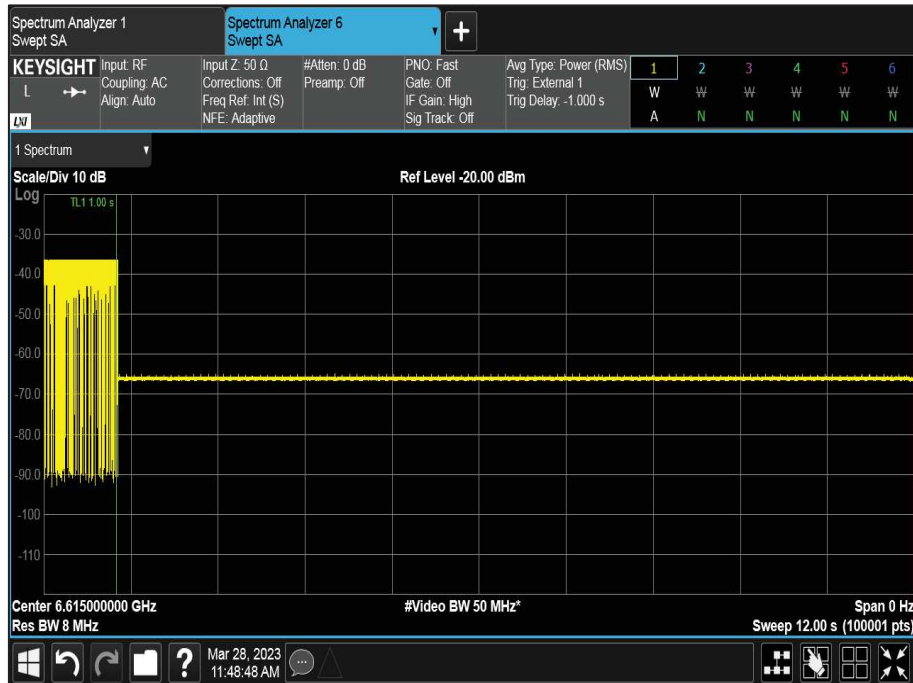


Figure 159 - U-NII-7, Minimum Bandwidth



| Parameter | Results | | |
|--------------------------------|---------|---------|--------|
| U-NII Band | 7 | 7 | 7 |
| Channel Number | 143 | 143 | 143 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6665 | 6665 | 6665 |
| AWGN Centre Frequency (MHz) | 6590 | 6590 | 6590 |
| AWGN Signal Power (dBm) | -67 | -65 | -64 |
| Antenna Gain (dBi) | 5.03 | 5.03 | 5.03 |
| Adjusted Power (dBm) | -72.03 | -70.03 | -69.03 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 386 - U-NII-7, Maximum Bandwidth (AWGN Low)

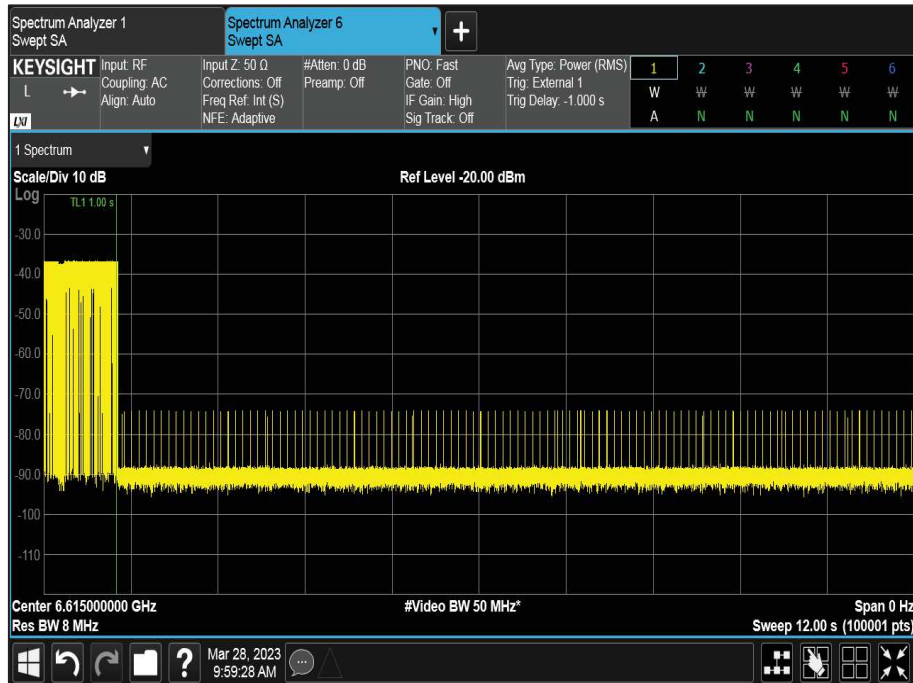


Figure 160 - U-NII-7, Minimum Bandwidth (AWGN Low)



| Parameter | Results | | |
|--------------------------------|---------|---------|--------|
| U-NII Band | 7 | 7 | 7 |
| Channel Number | 143 | 143 | 143 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6665 | 6665 | 6665 |
| AWGN Centre Frequency (MHz) | 6665 | 6665 | 6665 |
| AWGN Signal Power (dBm) | -68 | -67 | -66 |
| Antenna Gain (dBi) | 5.03 | 5.03 | 5.03 |
| Adjusted Power (dBm) | -73.03 | -72.03 | -71.03 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 387 - U-NII-7, Maximum Bandwidth (AWGN Mid)

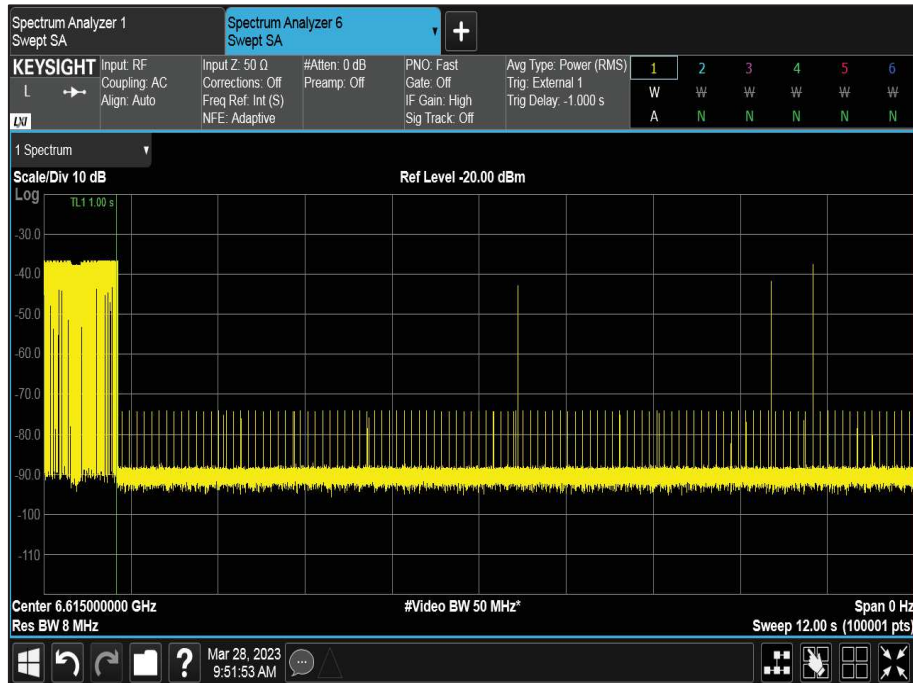


Figure 161 - U-NII-7, Minimum Bandwidth (AWGN Mid)



| Parameter | Results | | |
|--------------------------------|---------|---------|--------|
| U-NII Band | 7 | 7 | 7 |
| Channel Number | 143 | 143 | 143 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6665 | 6665 | 6665 |
| AWGN Centre Frequency (MHz) | 6740 | 6740 | 6740 |
| AWGN Signal Power (dBm) | -64 | -62 | -61 |
| Antenna Gain (dBi) | 5.03 | 5.03 | 5.03 |
| Adjusted Power (dBm) | -69.03 | -67.03 | -66.03 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 388 - U-NII-7, Maximum Bandwidth (AWGN High)

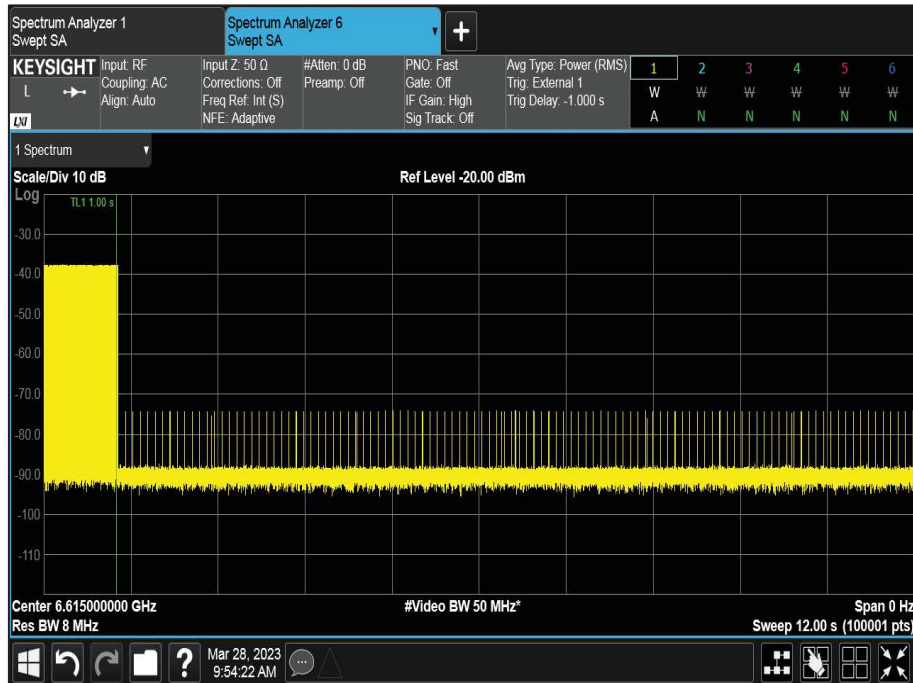


Figure 162 - U-NII-7, Minimum Bandwidth (AWGN High)



| Parameter | Results | | |
|--------------------------------|---------|---------|--------|
| U-NII Band | 8 | 8 | 8 |
| Channel Number | 197 | 197 | 197 |
| Bandwidth (MHz) | 20 | 20 | 20 |
| DUT Centre Frequency (MHz) | 6935 | 6935 | 6935 |
| AWGN Centre Frequency (MHz) | 6935 | 6935 | 6935 |
| AWGN Signal Power (dBm) | -72 | -70 | -69 |
| Antenna Gain (dBi) | 6.33 | 6.33 | 6.33 |
| Adjusted Power (dBm) | -78.33 | -76.33 | -75.33 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 389 - U-NII-8, Minimum Bandwidth



Figure 163 - U-NII-8, Minimum Bandwidth



| Parameter | Results | | |
|--------------------------------|---------|---------|--------|
| U-NII Band | 7 | 7 | 7 |
| Channel Number | 143 | 143 | 143 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6665 | 6665 | 6665 |
| AWGN Centre Frequency (MHz) | 6590 | 6590 | 6590 |
| AWGN Signal Power (dBm) | -67 | -65 | -64 |
| Antenna Gain (dBi) | 5.03 | 5.03 | 5.03 |
| Adjusted Power (dBm) | -72.03 | -70.03 | -69.03 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 390 - U-NII-8, Maximum Bandwidth (AWGN Low)

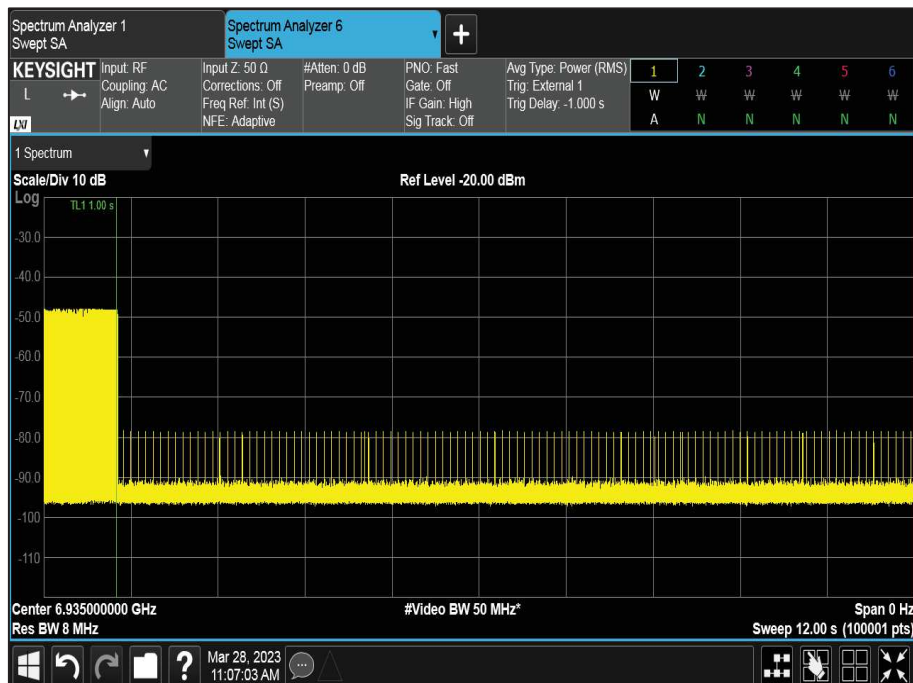


Figure 164 - U-NII-8, Minimum Bandwidth (AWGN Low)



| Parameter | Results | | |
|--------------------------------|---------|---------|--------|
| U-NII Band | 8 | 8 | 8 |
| Channel Number | 207 | 207 | 207 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6985 | 6985 | 6985 |
| AWGN Centre Frequency (MHz) | 6985 | 6985 | 6985 |
| AWGN Signal Power (dBm) | -70 | -69 | -68 |
| Antenna Gain (dBi) | 6.33 | 6.33 | 6.33 |
| Adjusted Power (dBm) | -76.33 | -75.33 | -74.33 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 391 - U-NII-8, Maximum Bandwidth (AWGN Mid)



Figure 165 - U-NII-8, Minimum Bandwidth (AWGN Mid)



| Parameter | Results | | |
|--------------------------------|---------|---------|--------|
| U-NII Band | 8 | 8 | 8 |
| Channel Number | 207 | 207 | 207 |
| Bandwidth (MHz) | 160 | 160 | 160 |
| DUT Centre Frequency (MHz) | 6985 | 6985 | 6985 |
| AWGN Centre Frequency (MHz) | 7060 | 7060 | 7060 |
| AWGN Signal Power (dBm) | -65 | -64 | -63 |
| Antenna Gain (dBi) | 6.33 | 6.33 | 6.33 |
| Adjusted Power (dBm) | -71.33 | -70.33 | -69.33 |
| Detection Limit (dBm) | -62.0 | -62.0 | -62.0 |
| EUT Tx Status (OFF/Minimal/ON) | ON | Minimal | OFF |

Table 392 - U-NII-8, Maximum Bandwidth (AWGN High)

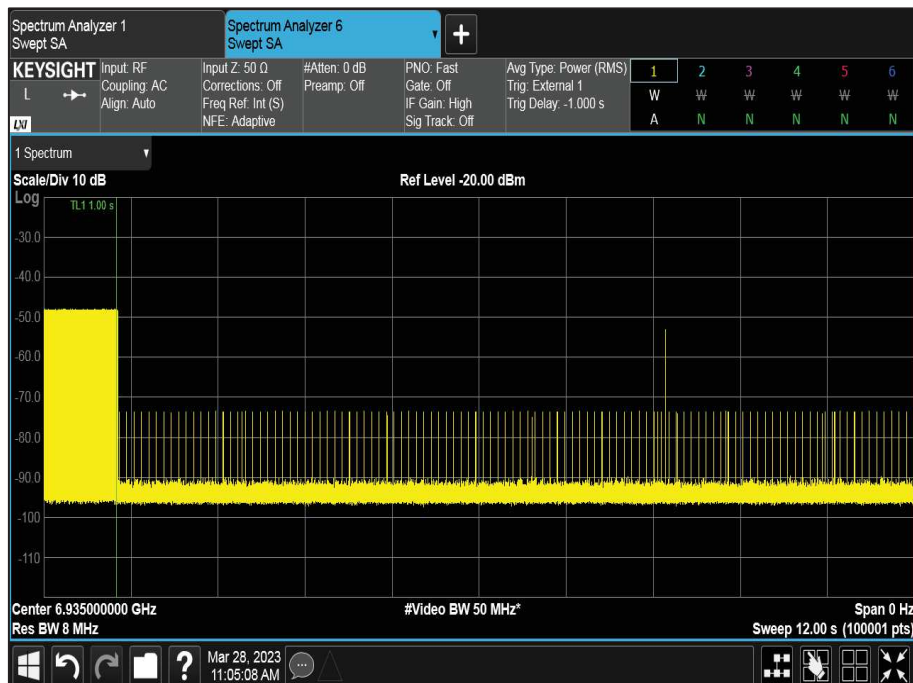


Figure 166 - U-NII-8, Minimum Bandwidth (AWGN High)



FCC 47 CFR Part 15.407 (d)(6)

Indoor access points, subordinate devices and client devices operating in the 5.925–7.125 GHz band must employ a contention-based protocol.

KDB 987594, Limit Clause I

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

ISED RSS-248, Limit Clause 4.7.2

The RLAN devices shall utilize a contention-based protocol to detect the presence of any emissions on the channel that the RLAN device intends to occupy. The RLAN device must detect within its entire occupied bandwidth a radio frequency power of -62 dBm or lower. The minimum detection threshold power is the received power averaged over a 1microsecond reference to a 0 dBi antenna.

If an emission is detected, the RLAN device shall vacate the occupied channel and shall not transmit on this channel until the detected radio frequency power is equal to or greater than the -62 dBm threshold.



2.7.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18.

| Instrument | Manufacturer | Type No. | TE No. | Calibration Period (months) | Calibration Expiry Date |
|--------------------------------|-----------------------|-----------------|--------|-----------------------------|-------------------------|
| EXA | Keysight Technologies | N9010B | 4969 | 24 | 07-Feb-2024 |
| Cable (18 GHz) | Rosenberger | LU7-071-1000 | 5103 | 12 | 18-Dec-2023 |
| Cable (18 GHz) | Rosenberger | LU7-071-2000 | 5106 | 12 | 18-Dec-2023 |
| 3.5 mm 1m Cable | Junkosha | MWX221-01000DMS | 5416 | 12 | 06-Mar-2024 |
| 3.5 mm 2m Cable | Junkosha | MWX221-02000DMS | 5427 | 12 | 29-Mar-2023 |
| Vector Signal Generator | Rohde & Schwarz | SMM100A | 5915 | 36 | 01-Mar-2026 |
| WiFi 6E Tri-Band Gaming Router | Asus | GT-AXE110000 | 5926 | - | TU |
| Humidity & Temperature meter | R.S Components | 1364 | 6148 | 12 | 17-Jun-2023 |
| Test Coupling Network | TUV SUD | TUV_RxTest_001 | 6387 | - | O/P Mon |

Table 393

TU - Traceability Unscheduled
 O/P Mon - Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

| Test Name | Measurement Uncertainty |
|--|---|
| Emission Bandwidth | ± 3.914 MHz |
| Maximum Conducted Output Power | ± 1.38 dB |
| Maximum Conducted Power Spectral Density | ± 1.49 dB |
| Authorised Band Edges | ± 6.3 dB |
| Spurious Radiated Emissions | 30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB |
| Unwanted Emissions within the 5925-7125 MHz band | ± 3.45 dB |
| Contention Based Protocol | Time: 0.30% Interferer BW: 267.98 kHz Interferer Level: 0.80 dB |

Table 394

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.