



Mode: HDR4  
 Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 5733MHz

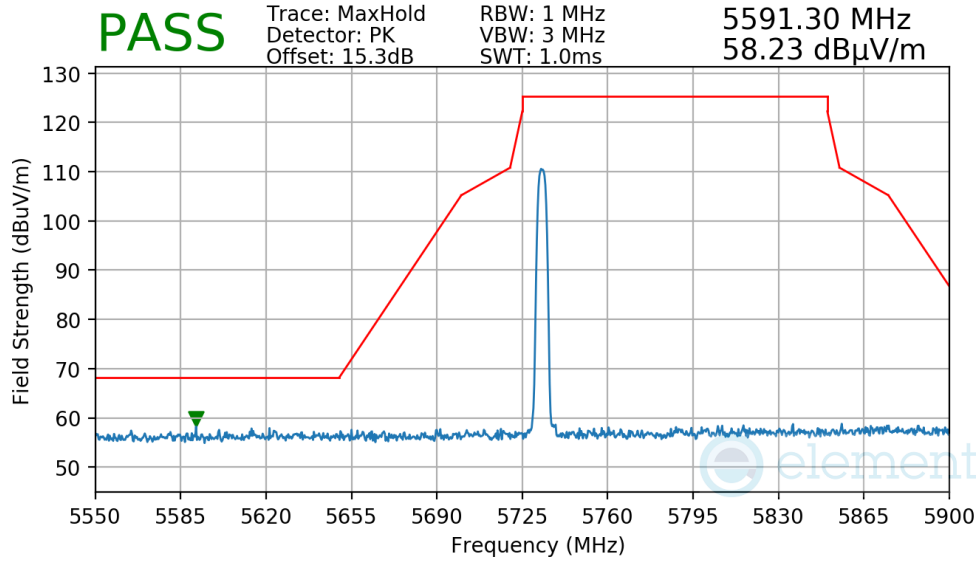

**Plot 7-205. Radiated Lower Band Edge Measurement TxBF**

Mode: HDR4  
 Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 5844MHz

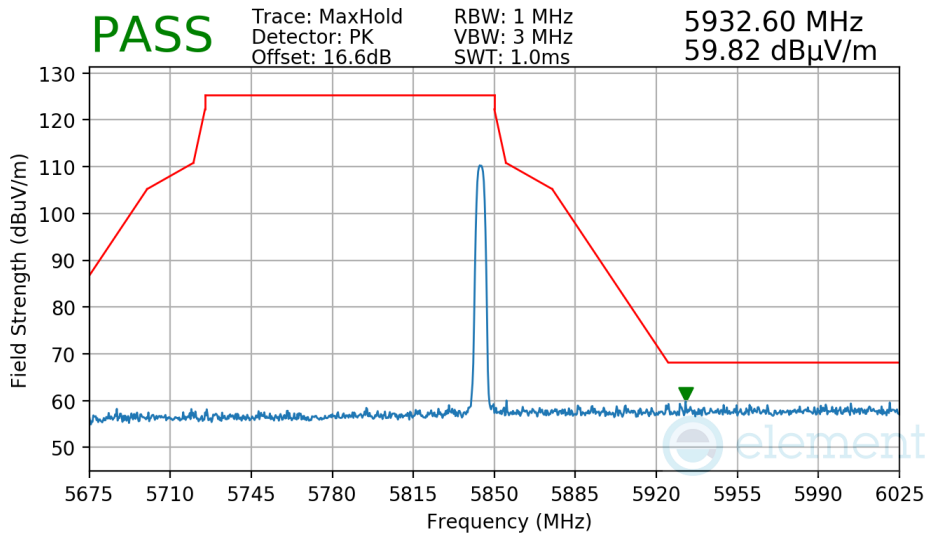

**Plot 7-206. Radiated Upper Band Edge Measurement TxBF**

FCC ID: BCGA2899 IC: 579C-A2899		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 163 of 175

## 7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-53 per Section 15.209.**

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-53. Radiated Limits

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 164 of 175


V 10.5 12/15/2021

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

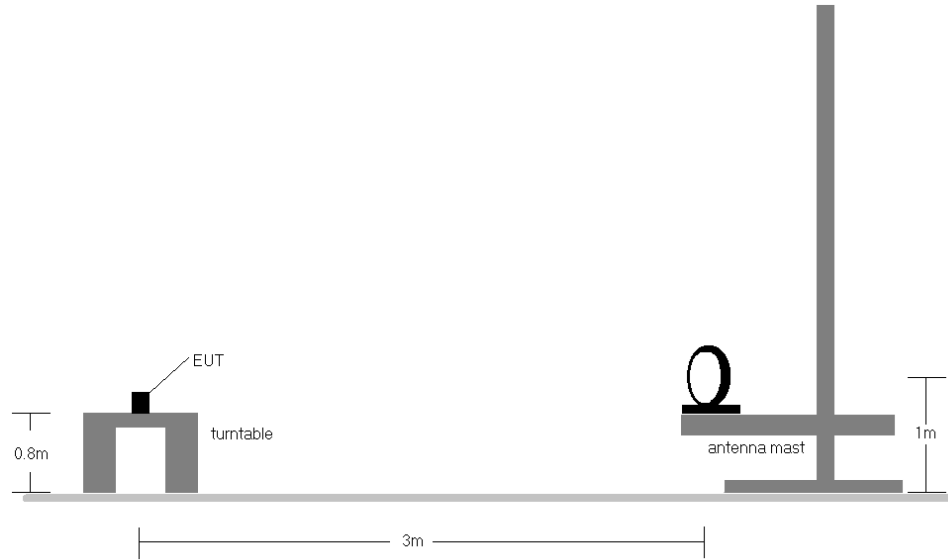

**Figure 7-6. Radiated Test Setup < 30MHz**

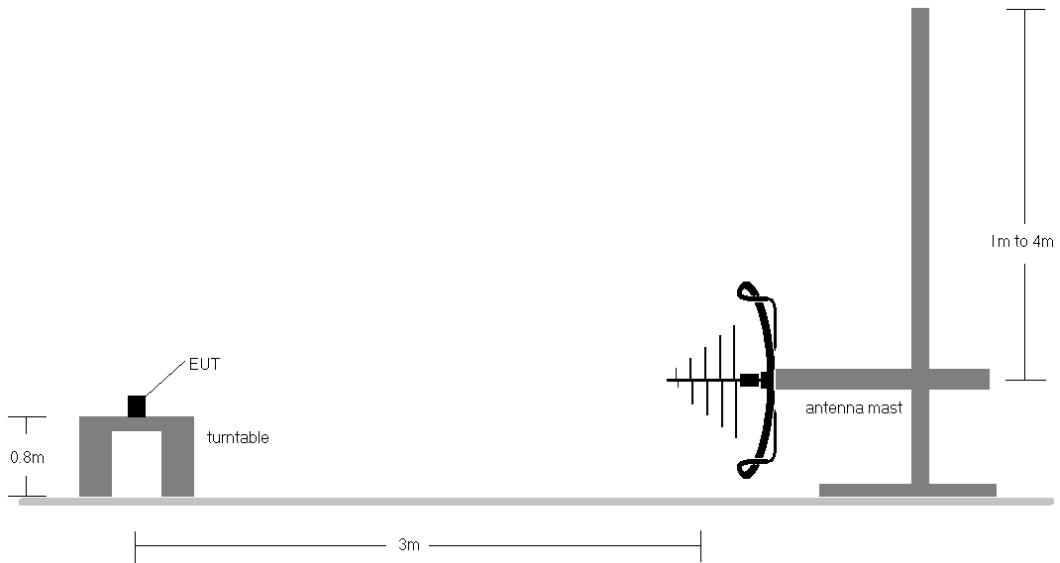

**Figure 7-7. Radiated Test Setup < 1GHz**

<b>FCC ID:</b> BCGA2899 <b>IC:</b> 579C-A2899		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270066-22-R1.BCG	<b>Test Dates:</b> 11/29/2023 - 3/21/2024	<b>EUT Type:</b> Tablet Device	Page 165 of 175

**Test Notes**

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-53.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor to USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger

**Sample Calculations**


**Determining Spurious Emissions Levels**

- Field Strength Level  $_{[dB_{\mu V/m}]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB_{\mu V/m}]} - \text{Limit }_{[dB_{\mu V/m}]}$

FCC ID: BCGA2899 IC: 579C-A2899		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270066-22-R1.BCG	<b>Test Dates:</b> 11/29/2023 - 3/21/2024	<b>EUT Type:</b> Tablet Device	Page 166 of 175

## TxBF Radiated Spurious Emissions (Below 1GHz)

§15.209; RSS-Gen [8.9]

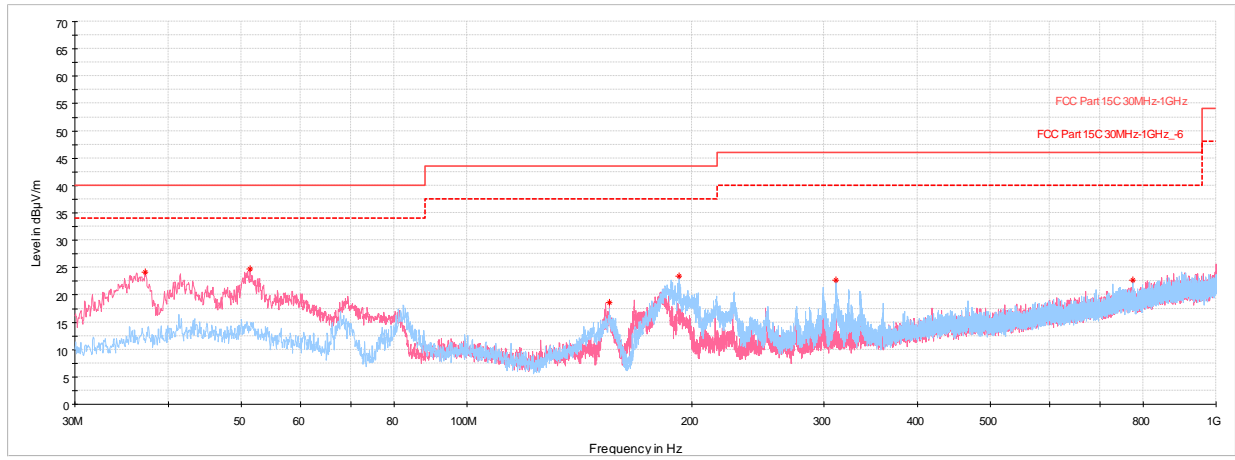

Plot 7-207. Radiated Spurious Emissions Below 1GHz TxBF (HDR4, ePA – 5245MHz), with AC/DC Adapter


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.23	Max-Peak	V	100	348	-67.67	-15.18	24.15	40.00	-15.85
51.39	Max-Peak	V	100	73	-69.08	-13.12	24.80	40.00	-15.20
155.08	Max-Peak	V	100	32	-68.46	-19.95	18.59	43.52	-24.93
191.94	Max-Peak	H	100	229	-66.36	-17.26	23.38	43.52	-20.14
310.82	Max-Peak	H	100	272	-70.02	-14.32	22.66	46.02	-23.36
774.62	Max-Peak	H	200	59	-79.02	-5.29	22.69	46.02	-23.33

Table 7-54. Radiated Spurious Emissions Below 1GHz TxBF (HDR4, ePA – 5245MHz), with AC/DC Adapter

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 167 of 175

## TxBF Radiated Spurious Emissions (Below 1GHz)

§15.209; RSS-Gen [8.9]

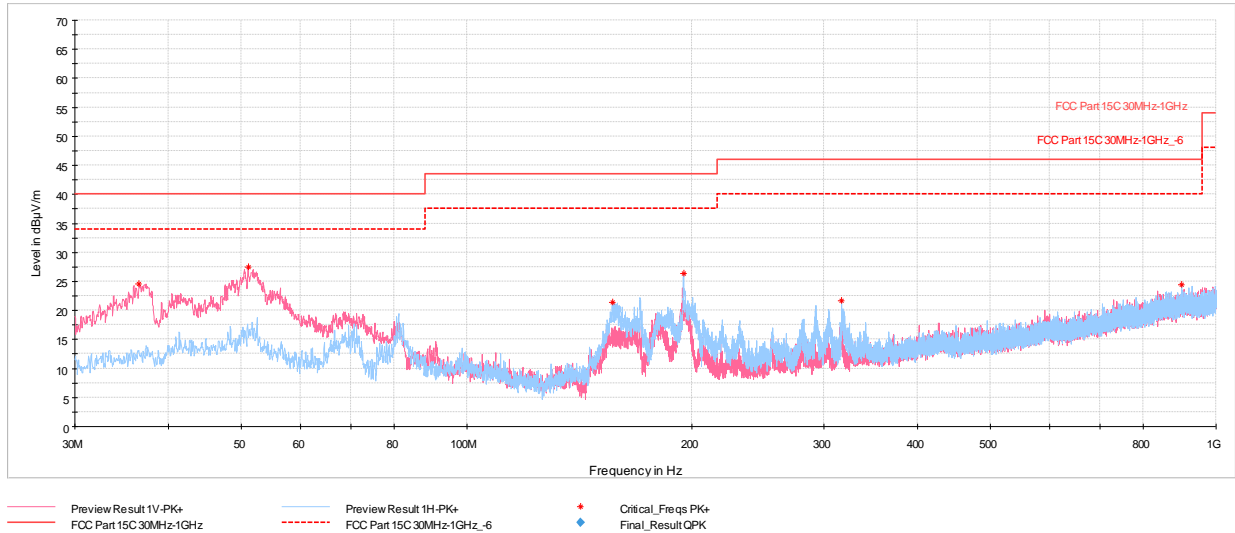

Plot 7-208. Radiated Spurious Emissions Below 1GHz TxBF (HDR4, ePA – 5844MHz), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
36.55	Max-Peak	V	100	2	-67.07	-15.35	24.58	40.00	-15.42
51.10	Max-Peak	V	100	2	-66.41	-13.13	27.46	40.00	-12.54
156.44	Max-Peak	H	100	219	-65.87	-19.79	21.34	43.52	-22.18
194.71	Max-Peak	H	100	229	-63.90	-16.76	26.34	43.52	-17.18
316.59	Max-Peak	H	100	256	-71.34	-13.94	21.72	46.02	-24.30
898.88	Max-Peak	H	100	0	-80.23	-2.30	24.47	46.02	-21.55

Table 7-55. . Radiated Spurious Emissions Below 1GHz TxBF (HDR4, ePA – 5844MHz), with AC/DC Adapter

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device		Page 168 of 175

## 7.8 AC Line Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-56. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Subclause 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 169 of 175

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

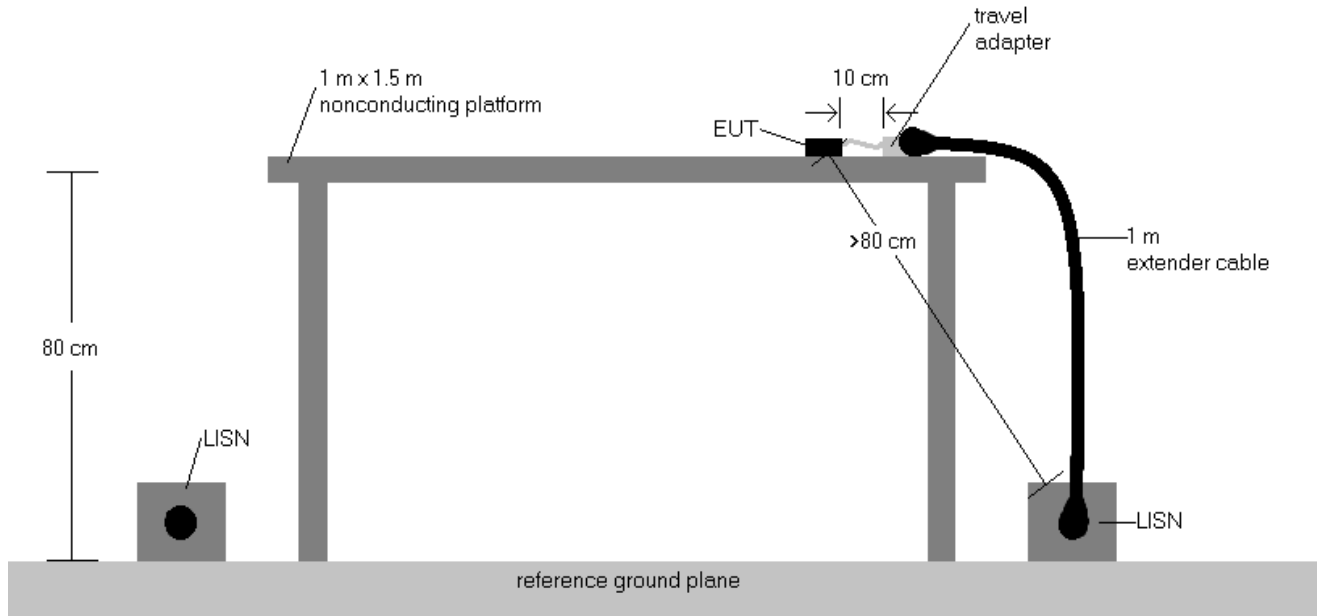

**Figure 7-8. Test Instrument & Measurement Setup**


## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor to USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
4.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6.  $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 170 of 175

V 10.5 12/15/2021



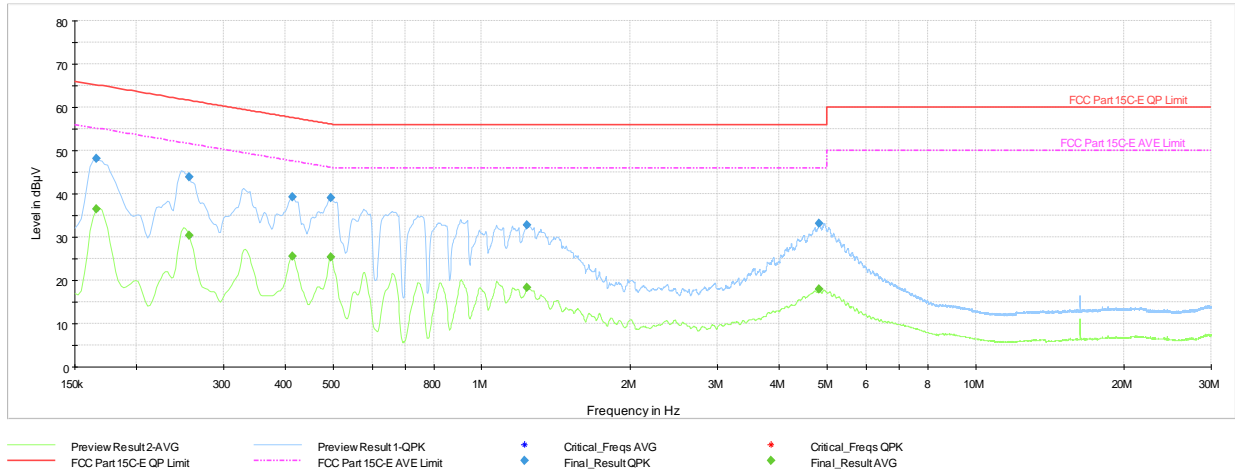


**Plot 7-209. AC Line Conducted Plot TxBF (HDR4, ePA – 5245MHz) (L1) with AC/DC Adapter**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	—	36.45	55.17	-18.72	L1	GND
0.166	FINAL	48.2	—	65.17	-17.01	L1	GND
0.256	FINAL	—	30.28	51.57	-21.29	L1	GND
0.256	FINAL	44.0	—	61.57	-17.59	L1	GND
0.413	FINAL	—	25.61	47.58	-21.98	L1	GND
0.413	FINAL	39.3	—	57.58	-18.30	L1	GND
0.494	FINAL	39.1	—	56.10	-16.97	L1	GND
0.494	FINAL	—	25.34	46.10	-20.76	L1	GND
1.237	FINAL	32.7	—	56.00	-23.28	L1	GND
1.237	FINAL	—	18.28	46.00	-27.72	L1	GND
4.826	FINAL	—	17.97	46.00	-28.03	L1	GND
4.826	FINAL	33.1	—	56.00	-22.87	L1	GND

**Table 7-57. AC Line Conducted TxBF (HDR4, ePA – 5245MHz) (L1) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 171 of 175

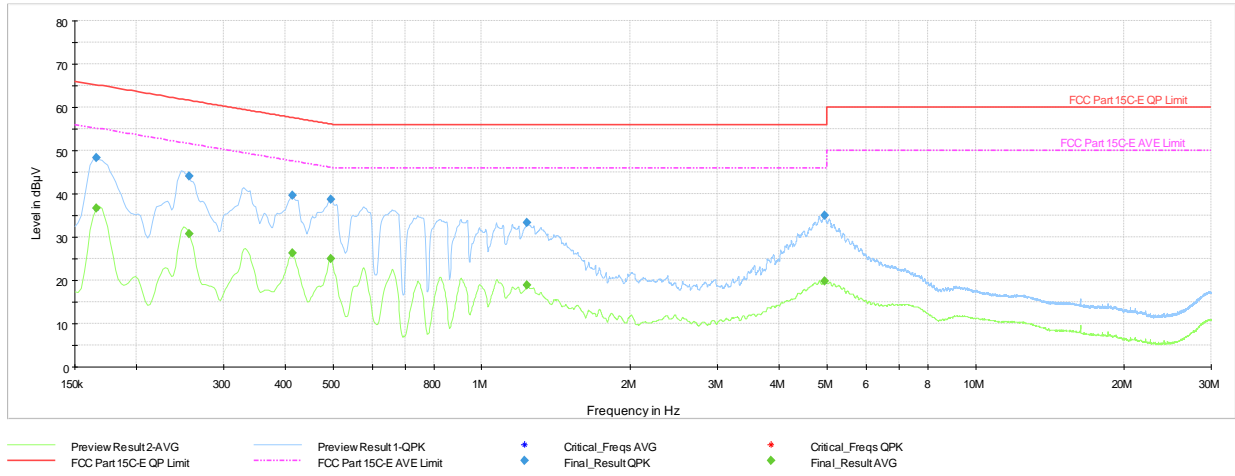


**Plot 7-210. AC Line Conducted Plot TxBF (HDR4, ePA – 5245MHz) (N) with AC/DC Adapter**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	—	36.71	55.17	-18.46	N	GND
0.166	FINAL	48.3	—	65.17	-16.88	N	GND
0.256	FINAL	—	30.77	51.57	-20.80	N	GND
0.256	FINAL	44.0	—	61.57	-17.57	N	GND
0.413	FINAL	—	26.21	47.58	-21.37	N	GND
0.413	FINAL	39.6	—	57.58	-17.95	N	GND
0.494	FINAL	38.6	—	56.10	-17.45	N	GND
0.494	FINAL	—	25.07	46.10	-21.03	N	GND
1.237	FINAL	33.3	—	56.00	-22.74	N	GND
1.237	FINAL	—	18.84	46.00	-27.16	N	GND
4.956	FINAL	—	19.77	46.00	-26.23	N	GND
4.956	FINAL	34.9	—	56.00	-21.08	N	GND

**Table 7-58. AC Line Conducted TxBF (HDR4, ePA – 5245MHz) (N) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 172 of 175

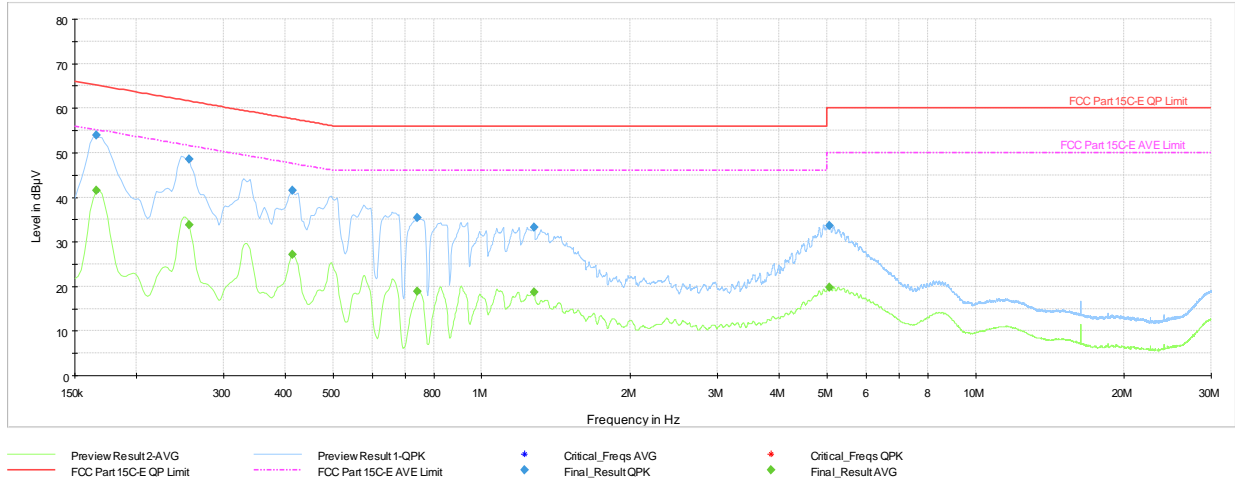


**Plot 7-211. AC Line Conducted Plot TxBF (HDR4, ePA – 5844MHz) (L1) with AC/DC Adapter**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	—	41.44	55.17	-13.73	L1	GND
0.166	FINAL	53.9	—	65.17	-11.30	L1	GND
0.256	FINAL	—	33.83	51.57	-17.74	L1	GND
0.256	FINAL	48.5	—	61.57	-13.08	L1	GND
0.413	FINAL	—	27.17	47.58	-20.41	L1	GND
0.413	FINAL	41.5	—	57.58	-16.13	L1	GND
0.742	FINAL	35.5	—	56.00	-20.55	L1	GND
0.742	FINAL	—	18.90	46.00	-27.10	L1	GND
1.277	FINAL	33.3	—	56.00	-22.75	L1	GND
1.277	FINAL	—	18.61	46.00	-27.39	L1	GND
5.060	FINAL	—	19.72	50.00	-30.28	L1	GND
5.060	FINAL	33.7	—	60.00	-26.31	L1	GND

**Table 7-59. AC Line Conducted TxBF (HDR4, ePA – 5844MHz) (L1) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 173 of 175

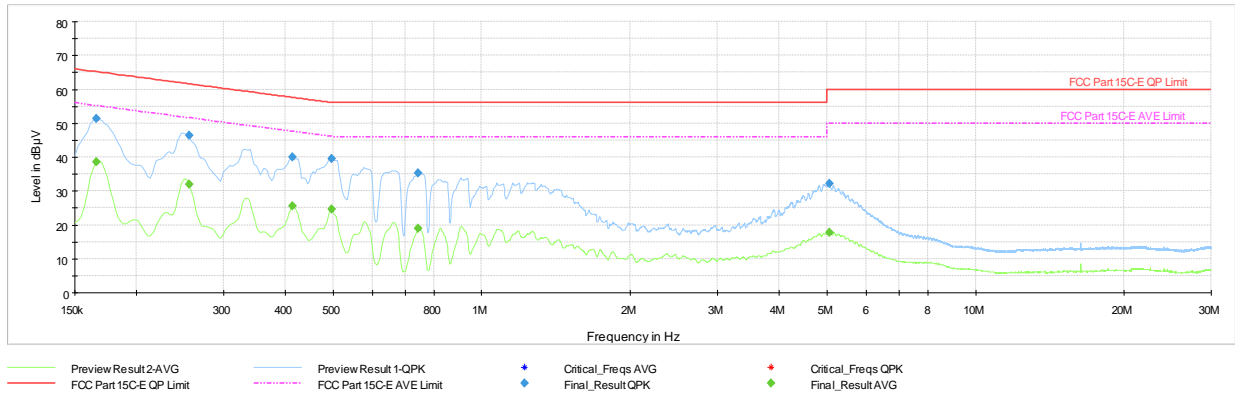

**Plot 7-212. AC Line Conducted Plot TxBF (HDR4, ePA – 5844MHz) (N) with AC/DC Adapter**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	—	38.57	55.17	-16.61	N	GND
0.166	FINAL	51.3	—	65.17	-13.90	N	GND
0.256	FINAL	—	31.95	51.57	-19.61	N	GND
0.256	FINAL	46.4	—	61.57	-15.15	N	GND
0.413	FINAL	—	25.51	47.58	-22.07	N	GND
0.413	FINAL	40.1	—	57.58	-17.53	N	GND
0.497	FINAL	39.6	—	56.06	-16.46	N	GND
0.497	FINAL	—	24.51	46.06	-21.55	N	GND
0.744	FINAL	35.3	—	56.00	-20.70	N	GND
0.744	FINAL	—	19.01	46.00	-26.99	N	GND
5.057	FINAL	—	17.76	50.00	-32.24	N	GND
5.057	FINAL	32.1	—	60.00	-27.92	N	GND

**Table 7-60. AC Line Conducted TxBF (HDR4, ePA – 5844MHz) (N) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-22-R1.BCG	Test Dates: 11/29/2023 - 3/21/2024	EUT Type: Tablet Device	Page 174 of 175

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2899, IC: 579C-A2899** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science, and Economic Development Canada Rules.

<b>FCC ID:</b> BCGA2899 <b>IC:</b> 579C-A2899	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270066-22-R1.BCG	<b>Test Dates:</b> 11/29/2023 - 3/21/2024	<b>EUT Type:</b> Tablet Device	Page 175 of 175

V 10.5 12/15/2021