



Plot 7-121. Conducted Spurious Plot Antenna WF7b (802.11ax OFDMA – RU26 – Ch. 11)

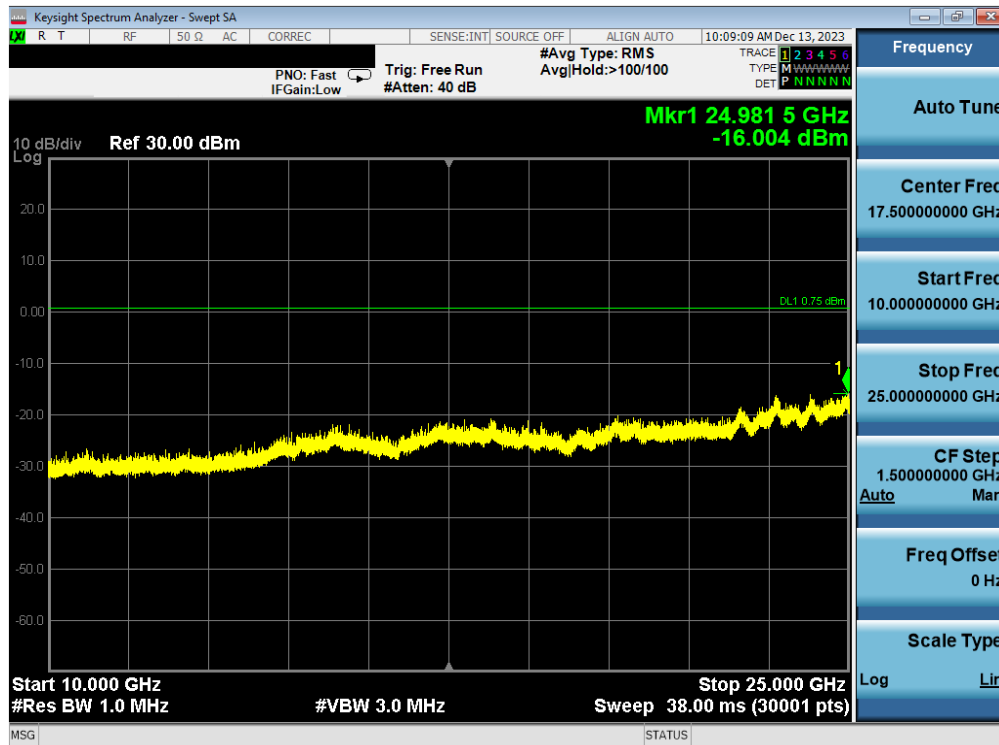


Plot 7-122. Conducted Spurious Plot Antenna WF7b (802.11ax OFDMA – RU26 – Ch. 11)

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 92 of 154

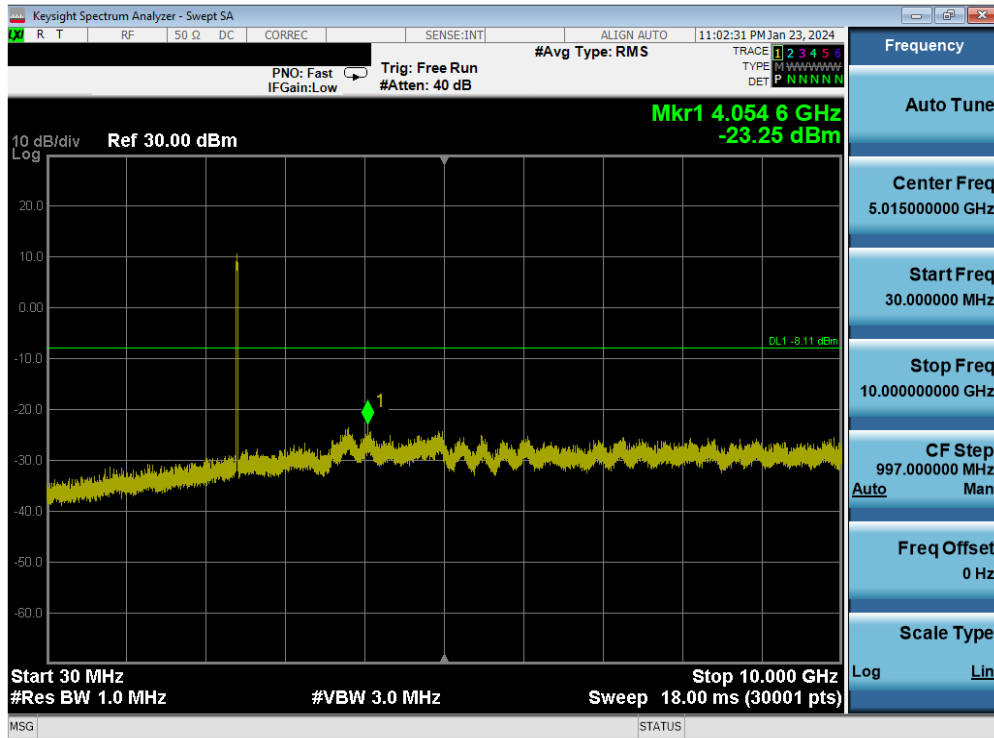


Plot 7-123. Conducted Spurious Plot Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 1)

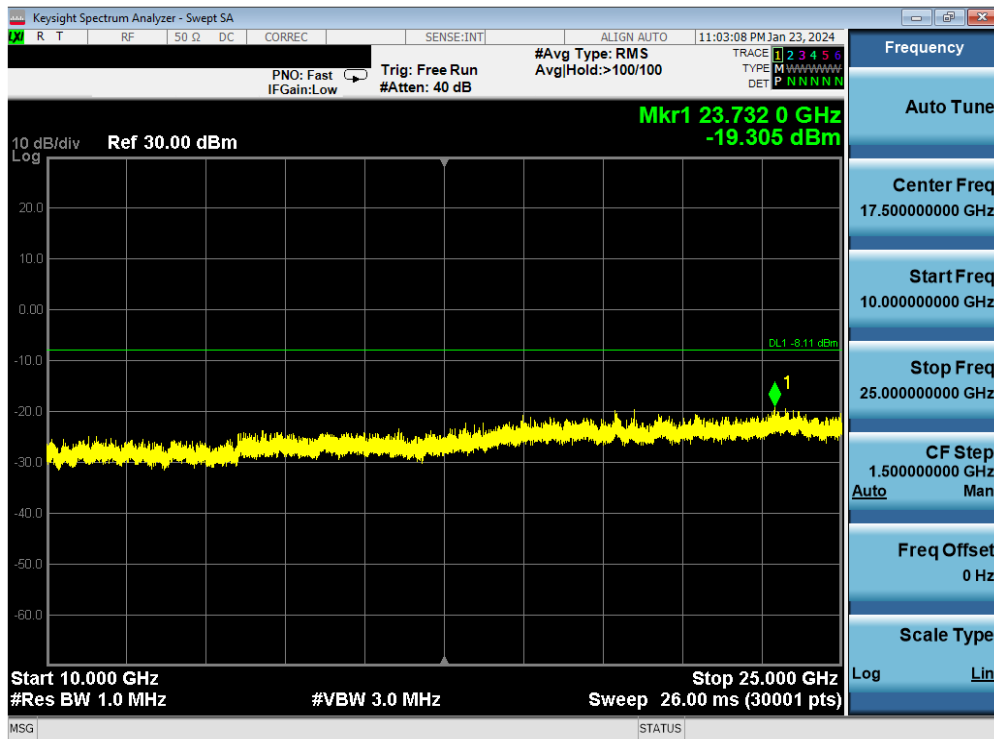


Plot 7-124. Conducted Spurious Plot Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 1)

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 93 of 154

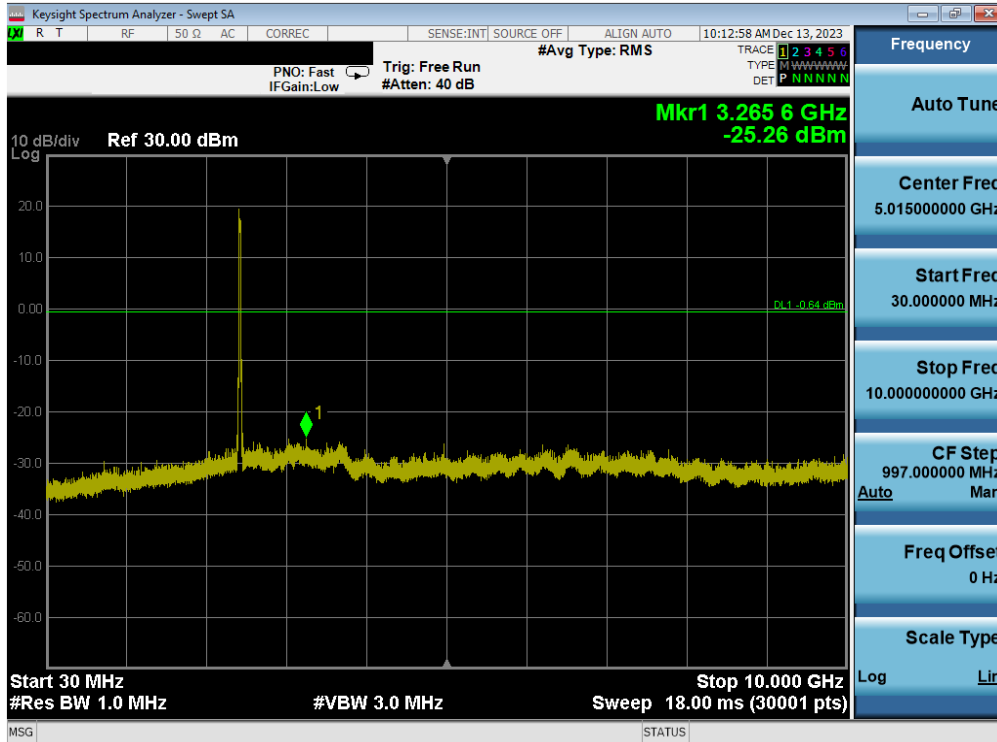


Plot 7-125. Conducted Spurious Plot Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 6)

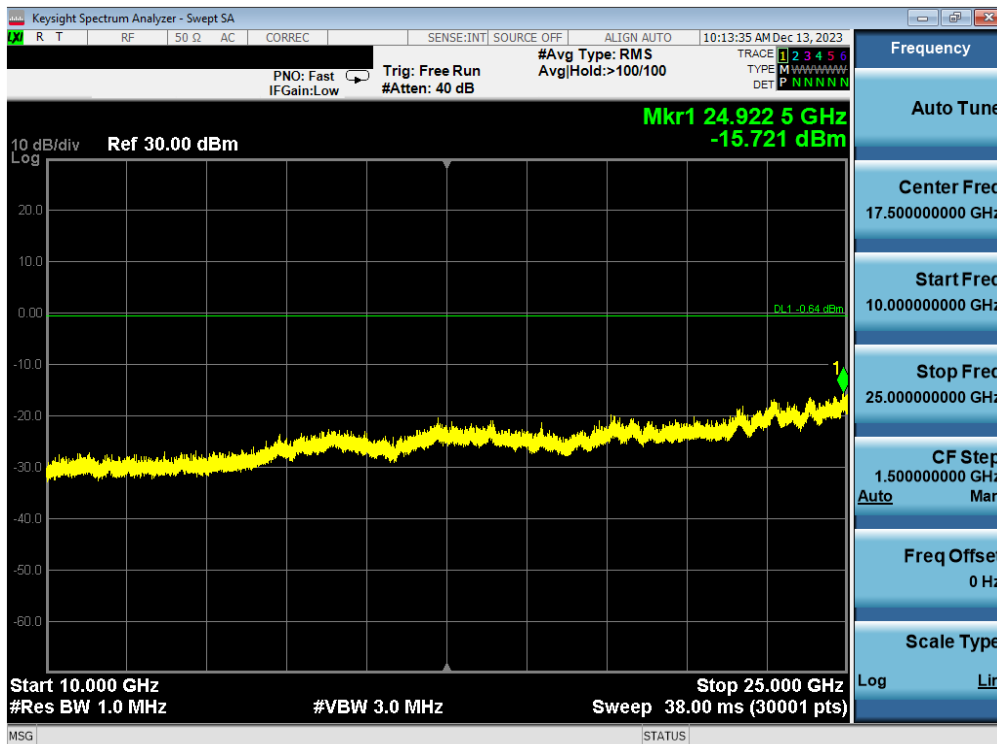


Plot 7-126. Conducted Spurious Plot Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 6)

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT</b> (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 94 of 154

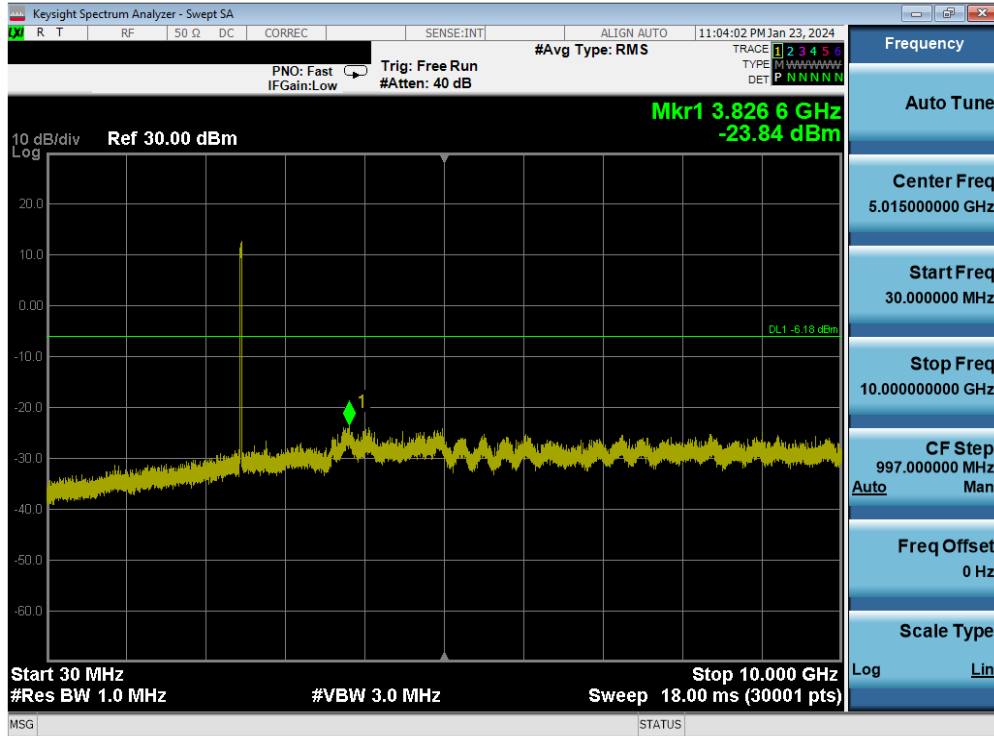

Plot 7-127. Conducted Spurious Plot Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 11)

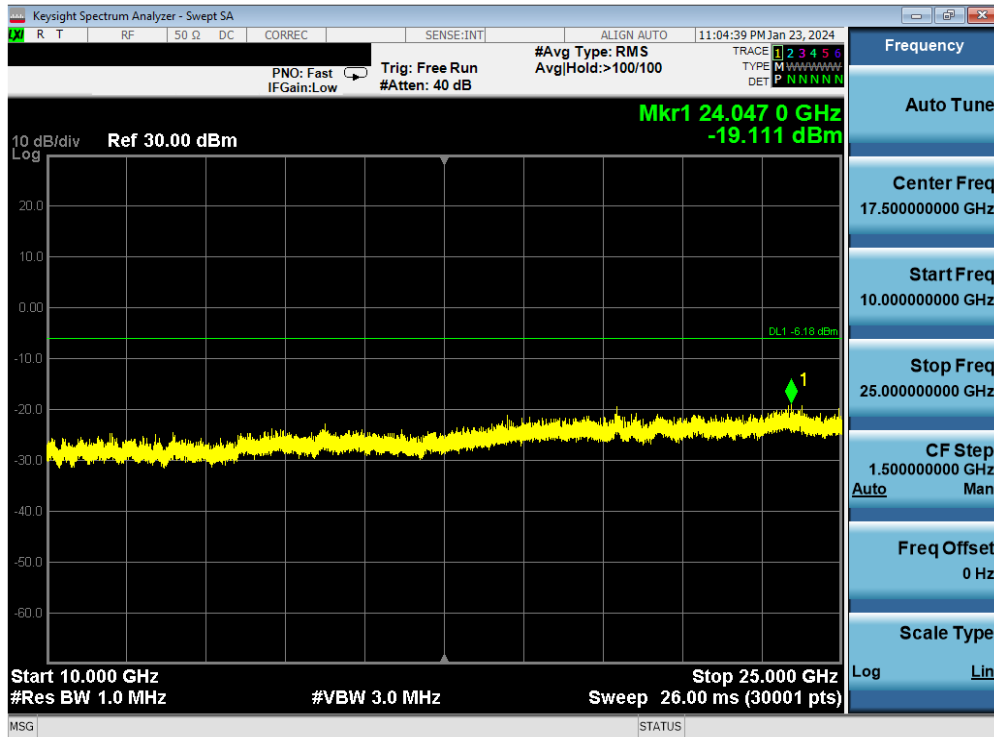

Plot 7-128. Conducted Spurious Plot Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 95 of 154

## 7.7 Radiated Spurious Emissions – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-19 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-19. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Subclause 6.6.4.3  
KDB 558074 D01 v05r02 – Sections 8.6, 8.7

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

#### Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 96 of 154

V 10.5 12/15/2021

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

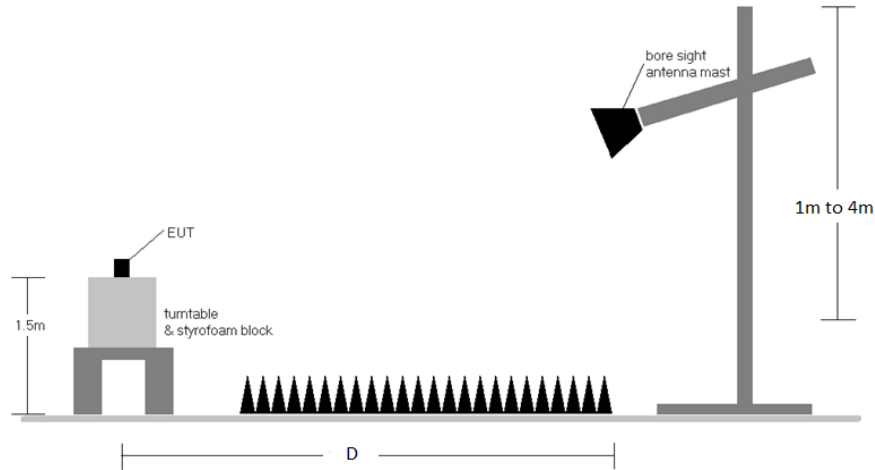

**Figure 7-6. Radiated Measurement Setup**

**Test Notes**

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All Radiated Spurious Emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-19.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
5. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All data rates were investigated and only the worst case is reported.
9. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 97 of 154

**Sample Calculations**

**Determining Spurious Emissions Levels**

- Field Strength Level  $_{[dB_{\mu V/m}]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB_{\mu V/m}]} - \text{Limit }_{[dB_{\mu V/m}]}$

**Radiated Band Edge Measurement Offset**


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

<b>FCC ID:</b> BCGA2902 <b>IC:</b> 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG		<b>Test Dates:</b> 11/29/2023 - 3/4/2024

### 7.7.1 Antenna WF8 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

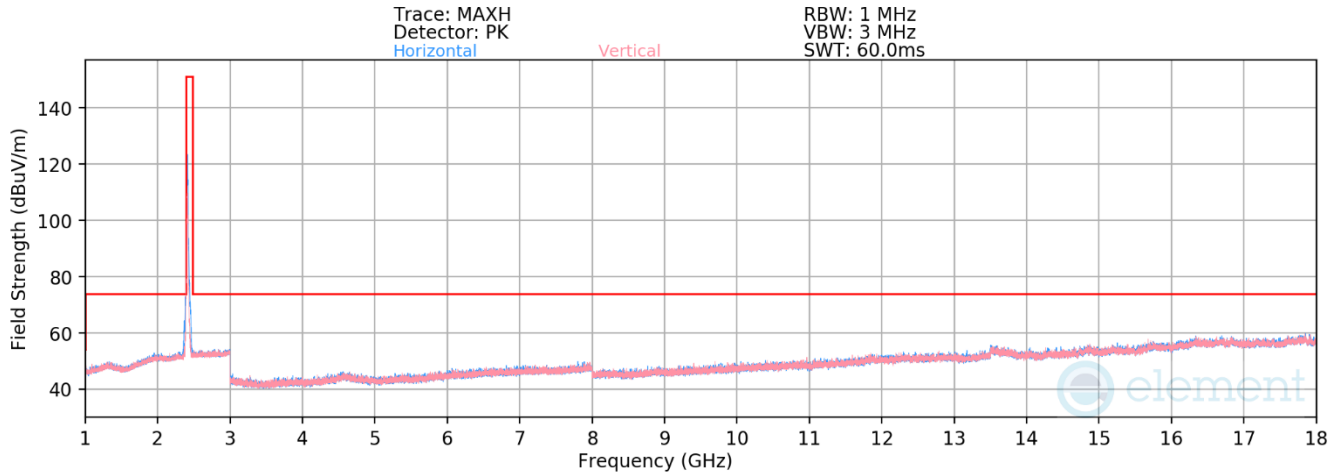

Plot 7-129. Radiated Spurious Emissions above 1GHz Antenna WF8 (802.11ax OFDMA – RU26 – Ch. 1)


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS9  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	-	-	-	-78.48	6.05	34.57	53.98	-19.41
4824.00	Peak	-	-	-	-67.72	6.05	45.33	73.98	-28.65
12060.00	Avg	-	-	-	-81.09	15.40	41.31	53.98	-12.67
12060.00	Peak	-	-	-	-69.73	15.40	52.67	73.98	-21.31

Table 7-20. Radiated Measurements Antenna WF8 (RU26)

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 99 of 154



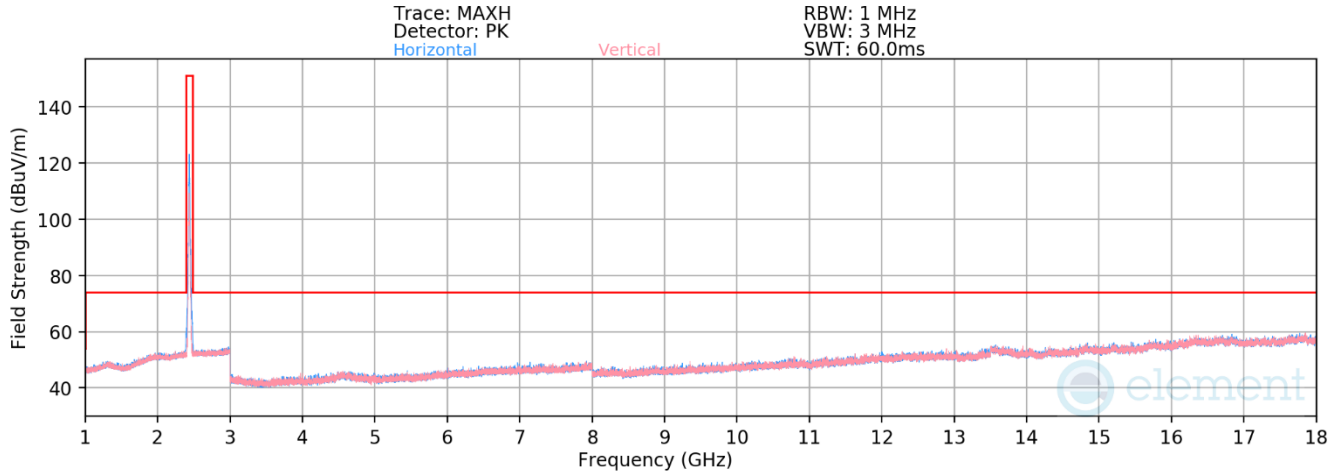


**Plot 7-130. Radiated Spurious Emissions above 1GHz Antenna WF8 (802.11ax OFDMA – RU26 – Ch. 6)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS9  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	-	-	-	-78.85	6.00	34.15	53.98	-19.83
4874.00	Peak	-	-	-	-67.45	6.00	45.55	73.98	-28.43
7311.00	Avg	-	-	-	-78.93	8.66	36.73	53.98	-17.25
7311.00	Peak	-	-	-	-68.10	8.66	47.56	73.98	-26.42
12185.00	Avg	-	-	-	-80.60	15.32	41.72	53.98	-12.26
12185.00	Peak	-	-	-	-69.50	15.32	52.82	73.98	-21.16

**Table 7-21. Radiated Measurements Antenna WF8 (RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 100 of 154

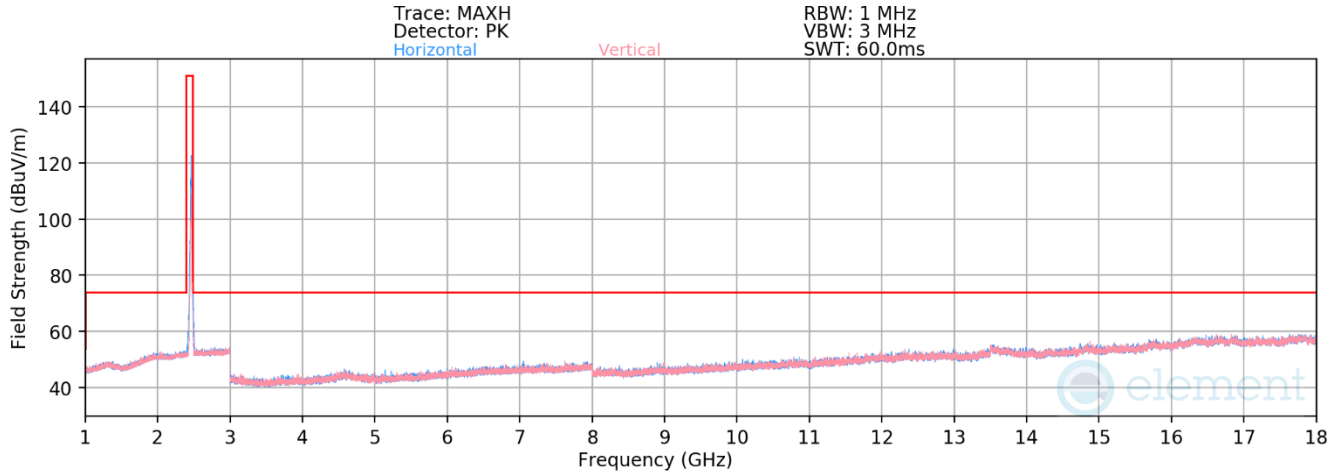


**Plot 7-131. Radiated Spurious Emissions above 1GHz Antenna WF8 (802.11ax OFDMA – RU26 – Ch. 11)**

Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>4</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2462MHz</u>
Channel:	<u>11</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-78.67	5.77	34.10	53.98	-19.88
4924.00	Peak	-	-	-	-67.35	5.77	45.42	73.98	-28.56
7386.00	Avg	-	-	-	-79.05	8.66	36.61	53.98	-17.37
7386.00	Peak	-	-	-	-67.47	8.66	48.19	73.98	-25.79
12310.00	Avg	-	-	-	-81.59	16.06	41.47	53.98	-12.51
12310.00	Peak	-	-	-	-70.31	16.06	52.75	73.98	-21.23

**Table 7-22. Radiated Measurements Antenna WF8 (RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 101 of 154

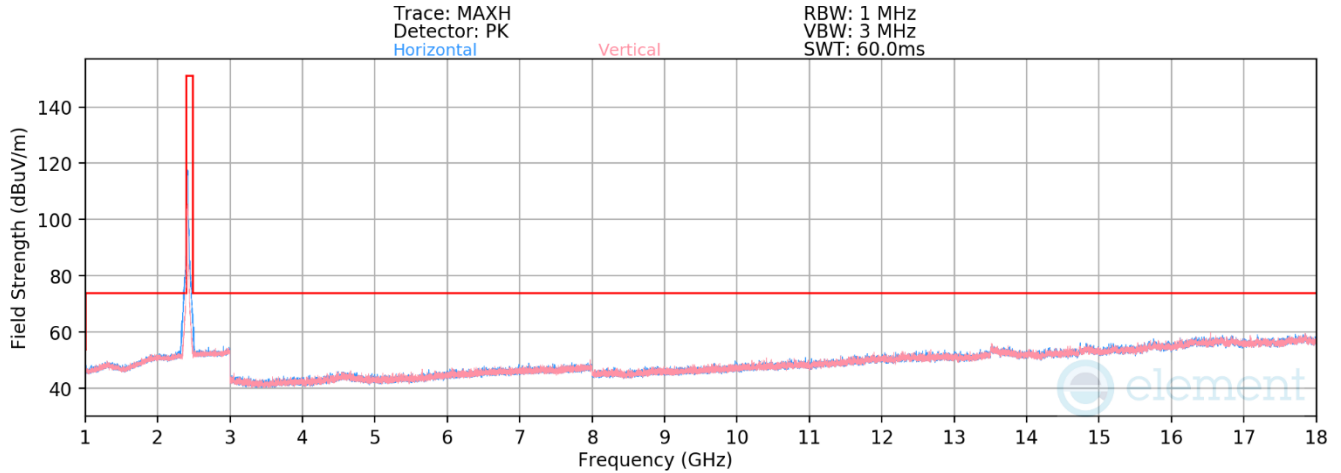


**Plot 7-132. Radiated Spurious Emissions above 1GHz Antenna WF8 (802.11ax OFDMA – RU242 – Ch. 1)**

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	-	-	-	-78.83	6.05	34.22	53.98	-19.76
4824.00	Peak	-	-	-	-66.99	6.05	46.06	73.98	-27.92
12060.00	Avg	-	-	-	-81.23	15.40	41.17	53.98	-12.81
12060.00	Peak	-	-	-	-70.19	15.40	52.21	73.98	-21.77

**Table 7-23. Radiated Measurements Antenna WF8 (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 102 of 154

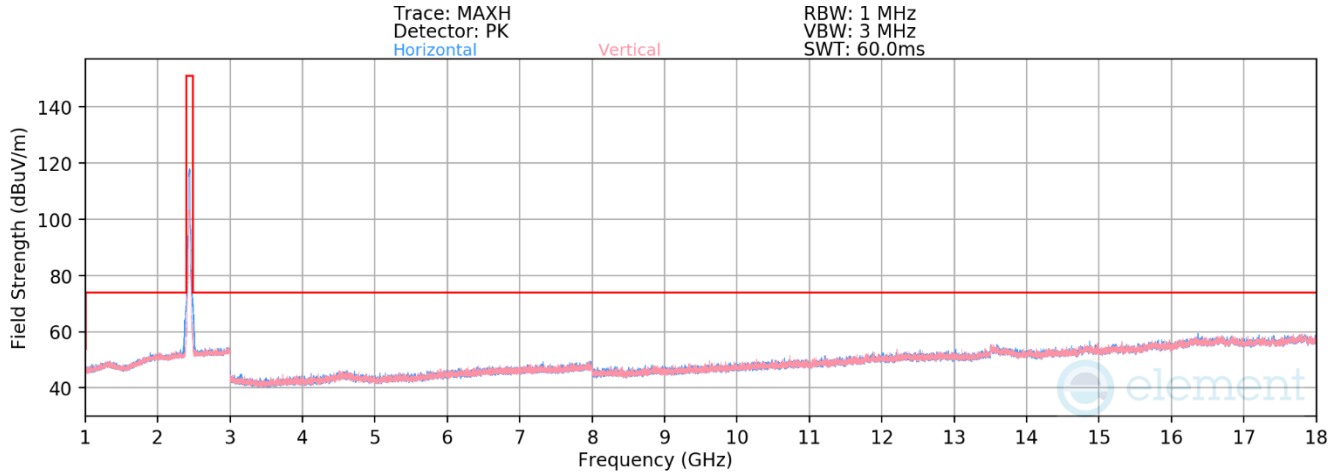


**Plot 7-133. Radiated Spurious Emissions above 1GHz Antenna WF8 (802.11ax OFDMA – RU242 – Ch. 6)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	-	-	-	-78.95	6.00	34.05	53.98	-19.93
4874.00	Peak	-	-	-	-67.08	6.00	45.92	73.98	-28.06
7311.00	Avg	-	-	-	-78.93	8.66	36.73	53.98	-17.25
7311.00	Peak	-	-	-	-67.61	8.66	48.05	73.98	-25.93
12185.00	Avg	-	-	-	-80.66	15.32	41.66	53.98	-12.32
12185.00	Peak	-	-	-	-69.39	15.32	52.93	73.98	-21.05

**Table 7-24. Radiated Measurements Antenna WF8 (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 103 of 154

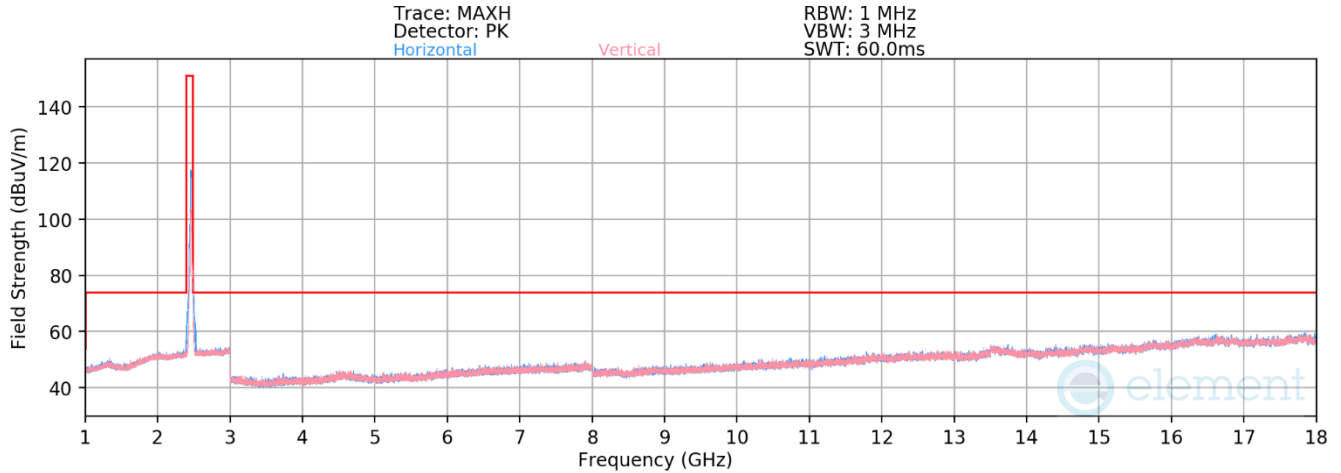

**Plot 7-134. Radiated Spurious Emissions above 1GHz Antenna WF8 (802.11ax OFDMA – RU242 – Ch. 11)**

Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>61</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2462MHz</u>
Channel:	<u>11</u>


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-78.78	5.77	33.99	53.98	-19.99
4924.00	Peak	-	-	-	-67.75	5.77	45.02	73.98	-28.96
7386.00	Avg	-	-	-	-79.15	8.66	36.51	53.98	-17.47
7386.00	Peak	-	-	-	-67.98	8.66	47.68	73.98	-26.30
12310.00	Avg	-	-	-	-81.45	16.06	41.61	53.98	-12.37
12310.00	Peak	-	-	-	-69.50	16.06	53.56	73.98	-20.42

**Table 7-25. Radiated Measurements Antenna WF8 (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 104 of 154

## 7.7.2 Antenna WF7b Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

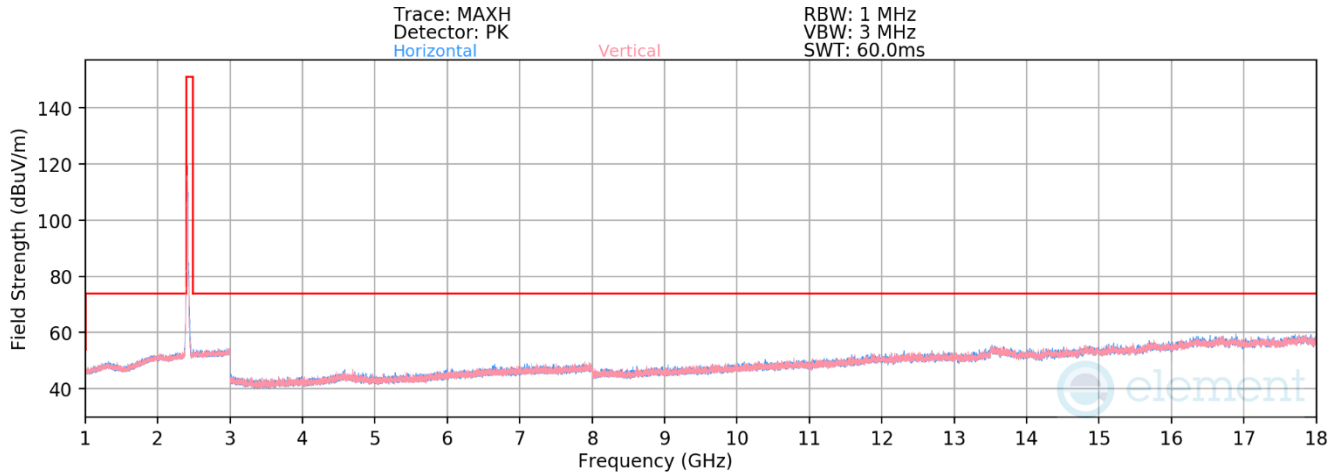


**Plot 7-135. Radiated Spurious Emissions above 1GHz Antenna WF7b (802.11ax OFDMA – RU26 – Ch. 1)**

Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>4</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2412MHz</u>
Channel:	<u>01</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	-	-	-	-78.41	6.05	34.64	53.98	-19.34
4824.00	Peak	-	-	-	-67.33	6.05	45.72	73.98	-28.26
12060.00	Avg	-	-	-	-81.26	15.40	41.14	53.98	-12.84
12060.00	Peak	-	-	-	-69.53	15.40	52.87	73.98	-21.11

**Table 7-26. Radiated Measurements Antenna WF7b (RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 105 of 154

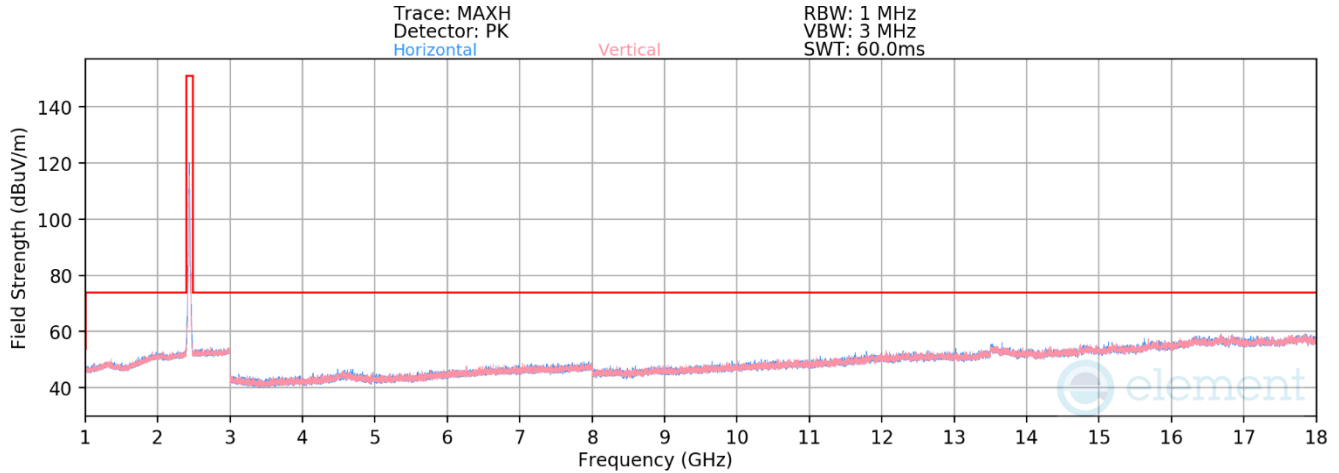


**Plot 7-136. Radiated Spurious Emissions above 1GHz Antenna WF7b (802.11ax OFDMA – RU26 – Ch. 6)**

Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>4</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2437MHz</u>
Channel:	<u>06</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	-	-	-	-78.95	6.00	34.05	53.98	-19.93
4874.00	Peak	-	-	-	-67.39	6.00	45.61	73.98	-28.37
7311.00	Avg	-	-	-	-78.98	8.66	36.68	53.98	-17.30
7311.00	Peak	-	-	-	-67.82	8.66	47.84	73.98	-26.14
12185.00	Avg	-	-	-	-80.59	15.32	41.73	53.98	-12.25
12185.00	Peak	-	-	-	-69.19	15.32	53.13	73.98	-20.85

**Table 7-27. Radiated Measurements Antenna WF7b (RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 106 of 154

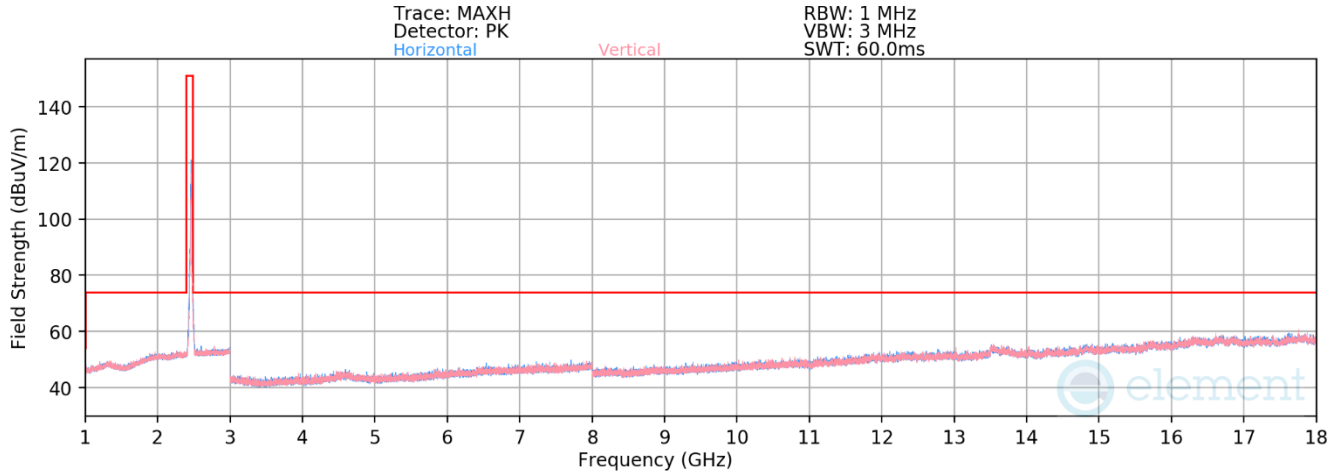

**Plot 7-137. Radiated Spurious Emissions above 1GHz Antenna WF7b (802.11ax OFDMA – RU26 – Ch. 11)**


Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>4</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2462MHz</u>
Channel:	<u>11</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-78.66	5.77	34.11	53.98	-19.87
4924.00	Peak	-	-	-	-67.33	5.77	45.44	73.98	-28.54
7386.00	Avg	-	-	-	-78.99	8.66	36.67	53.98	-17.31
7386.00	Peak	-	-	-	-67.77	8.66	47.89	73.98	-26.09
12310.00	Avg	-	-	-	-81.44	16.06	41.62	53.98	-12.36
12310.00	Peak	-	-	-	-70.23	16.06	52.83	73.98	-21.15

**Table 7-28. Radiated Measurements Antenna WF7b (RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 107 of 154



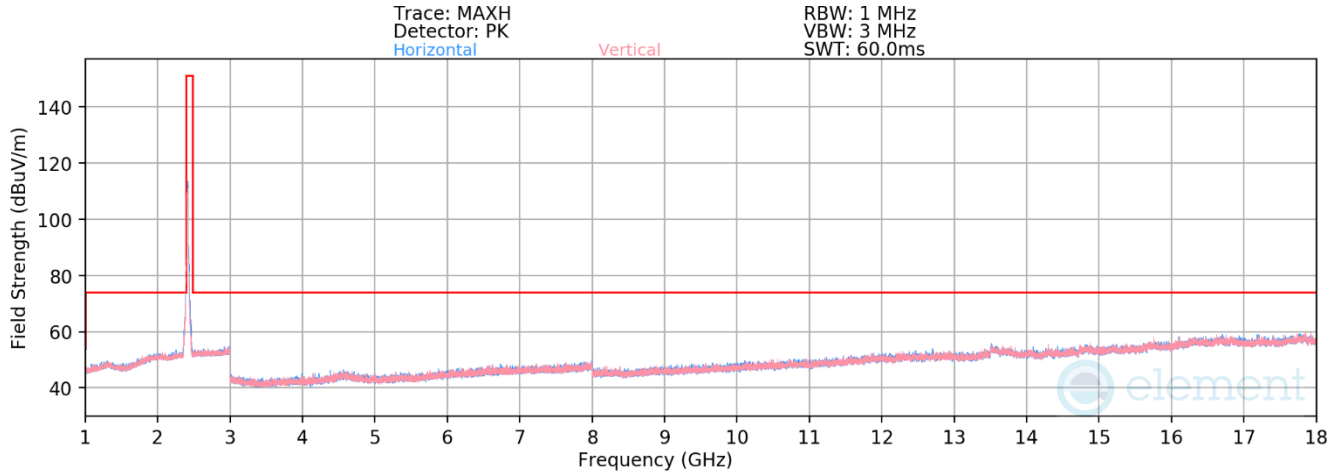


**Plot 7-138. Radiated Spurious Emissions above 1GHz Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 1)**

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	-	-	-	-78.41	6.05	34.64	53.98	-19.34
4824.00	Peak	-	-	-	-67.33	6.05	45.72	73.98	-28.26
12060.00	Avg	-	-	-	-81.26	15.40	41.14	53.98	-12.84
12060.00	Peak	-	-	-	-69.53	15.40	52.87	73.98	-21.11

**Table 7-29. Radiated Measurements Antenna WF7b (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device		Page 108 of 154

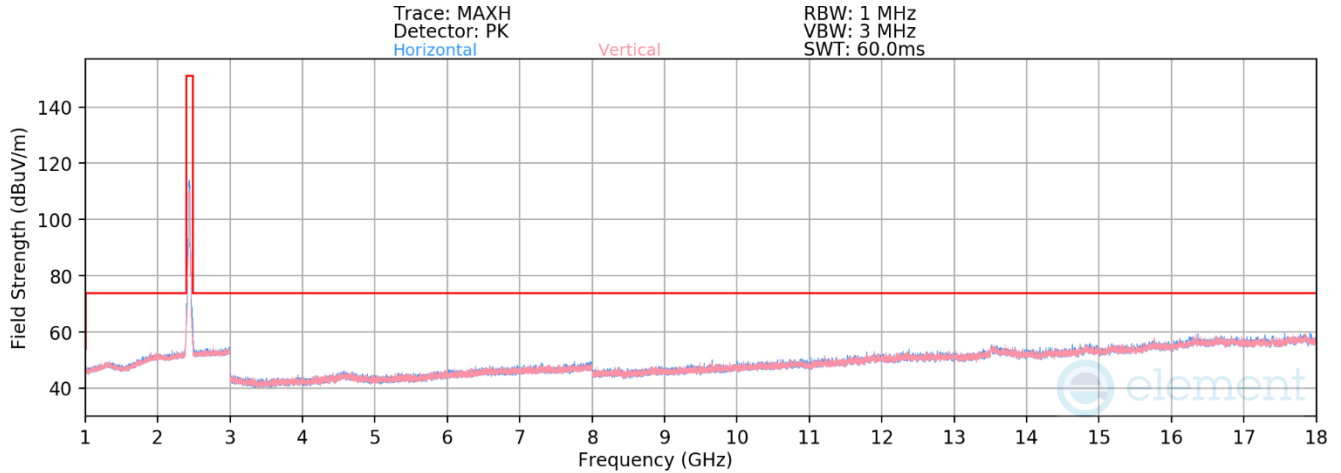


**Plot 7-139. Radiated Spurious Emissions above 1GHz Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 6)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	-	-	-	-78.70	6.00	34.30	53.98	-19.68
4874.00	Peak	-	-	-	-67.09	6.00	45.91	73.98	-28.07
7311.00	Avg	-	-	-	-78.85	8.66	36.81	53.98	-17.17
7311.00	Peak	-	-	-	-67.84	8.66	47.82	73.98	-26.16
12185.00	Avg	-	-	-	-80.71	15.32	41.61	53.98	-12.37
12185.00	Peak	-	-	-	-69.81	15.32	52.51	73.98	-21.47

**Table 7-30. Radiated Measurements Antenna WF7b (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device		Page 109 of 154

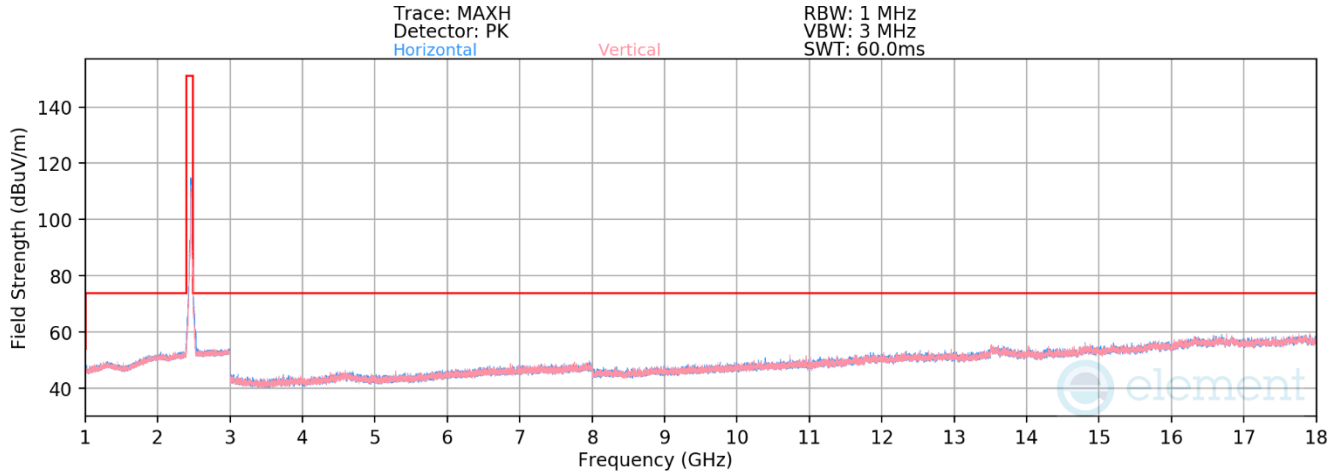

**Plot 7-140. Radiated Spurious Emissions above 1GHz Antenna WF7b (802.11ax OFDMA – RU242 – Ch. 11)**

Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>61</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2462MHz</u>
Channel:	<u>11</u>


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-78.72	5.77	34.05	53.98	-19.93
4924.00	Peak	-	-	-	-67.27	5.77	45.50	73.98	-28.48
7386.00	Avg	-	-	-	-79.08	8.66	36.58	53.98	-17.40
7386.00	Peak	-	-	-	-67.73	8.66	47.93	73.98	-26.05
12310.00	Avg	-	-	-	-81.56	16.06	41.50	53.98	-12.48
12310.00	Peak	-	-	-	-70.31	16.06	52.75	73.98	-21.23

**Table 7-31. Radiated Measurements Antenna WF7b (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 110 of 154

### 7.7.3 CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

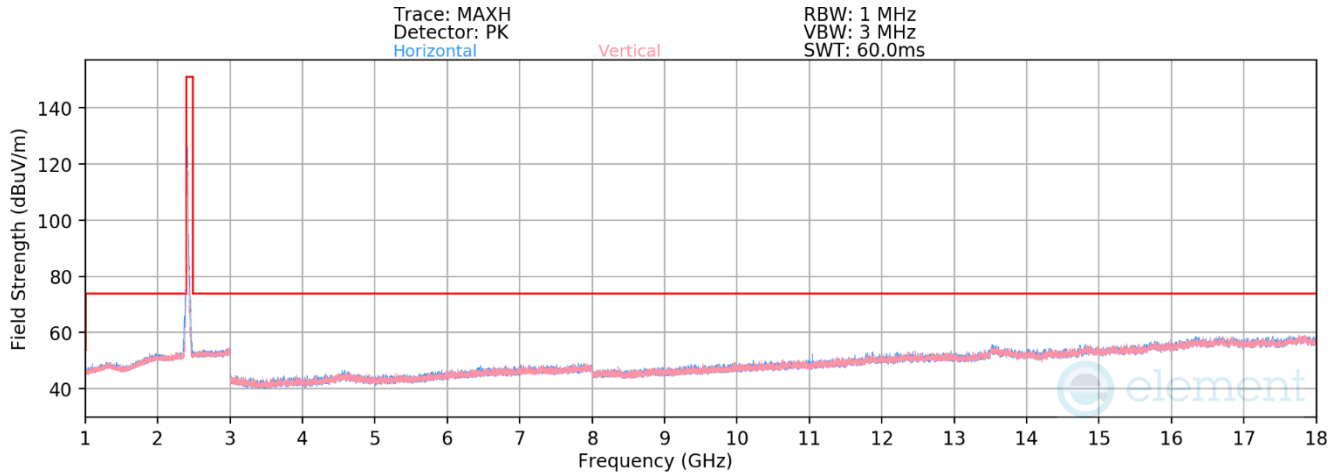


**Plot 7-141. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 1)**

Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>4</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2412MHz</u>
Channel:	<u>01</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	-	-	-	-78.92	6.05	34.13	53.98	-19.85
4824.00	Peak	-	-	-	-67.67	6.05	45.38	73.98	-28.60
12060.00	Avg	-	-	-	-81.05	15.40	41.35	53.98	-12.63
12060.00	Peak	-	-	-	-69.54	15.40	52.86	73.98	-21.12

**Table 7-32. Radiated Measurements CDD (RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 111 of 154

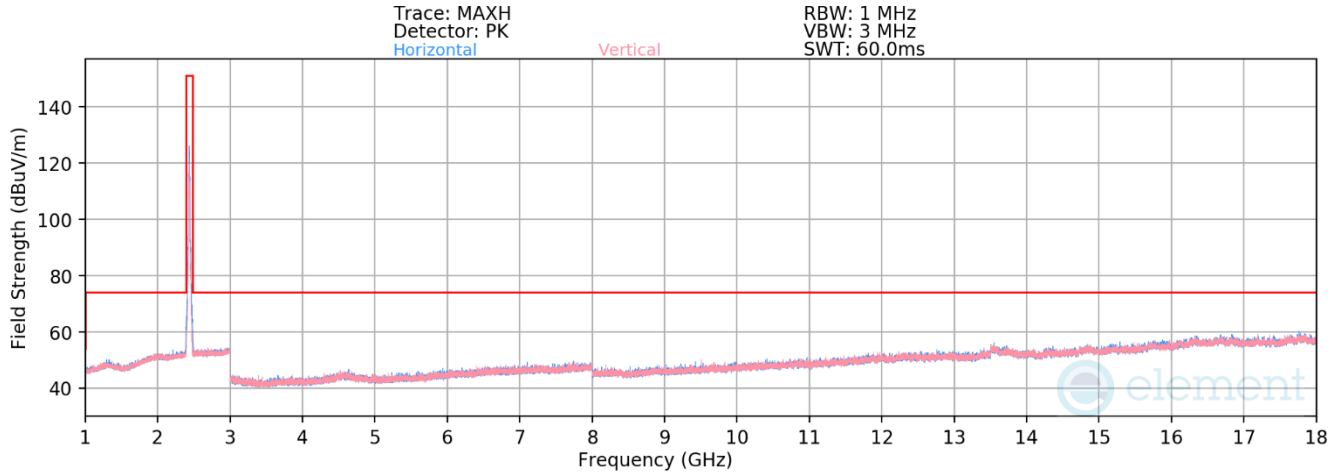


**Plot 7-142. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 6)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS9  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	-	-	-	-78.93	6.00	34.07	53.98	-19.91
4874.00	Peak	-	-	-	-67.73	6.00	45.27	73.98	-28.71
7311.00	Avg	-	-	-	-79.03	8.66	36.63	53.98	-17.35
7311.00	Peak	-	-	-	-67.64	8.66	48.02	73.98	-25.96
12185.00	Avg	-	-	-	-80.61	15.32	41.71	53.98	-12.27
12185.00	Peak	-	-	-	-68.98	15.32	53.34	73.98	-20.64

**Table 7-33. Radiated Measurements CDD (RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 112 of 154

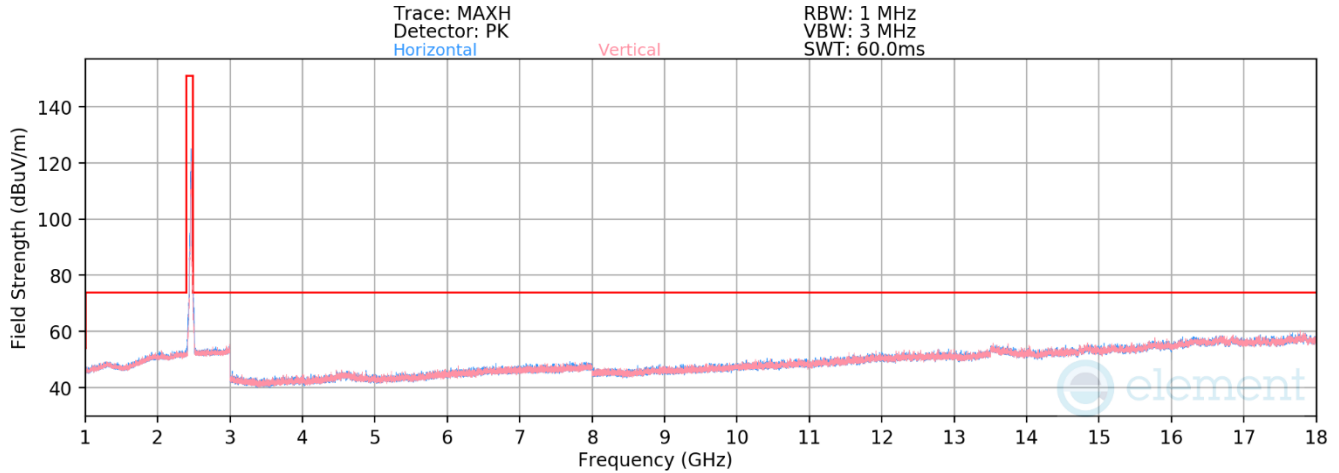


**Plot 7-143. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 11)**

Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>4</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2462MHz</u>
Channel:	<u>11</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-78.59	5.77	34.18	53.98	-19.80
4924.00	Peak	-	-	-	-66.80	5.77	45.97	73.98	-28.01
7386.00	Avg	-	-	-	-78.87	8.66	36.79	53.98	-17.19
7386.00	Peak	-	-	-	-67.40	8.66	48.26	73.98	-25.72
12310.00	Avg	-	-	-	-81.23	16.06	41.83	53.98	-12.15
12310.00	Peak	-	-	-	-70.20	16.06	52.86	73.98	-21.12

**Table 7-34. Radiated Measurements CDD (RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 113 of 154

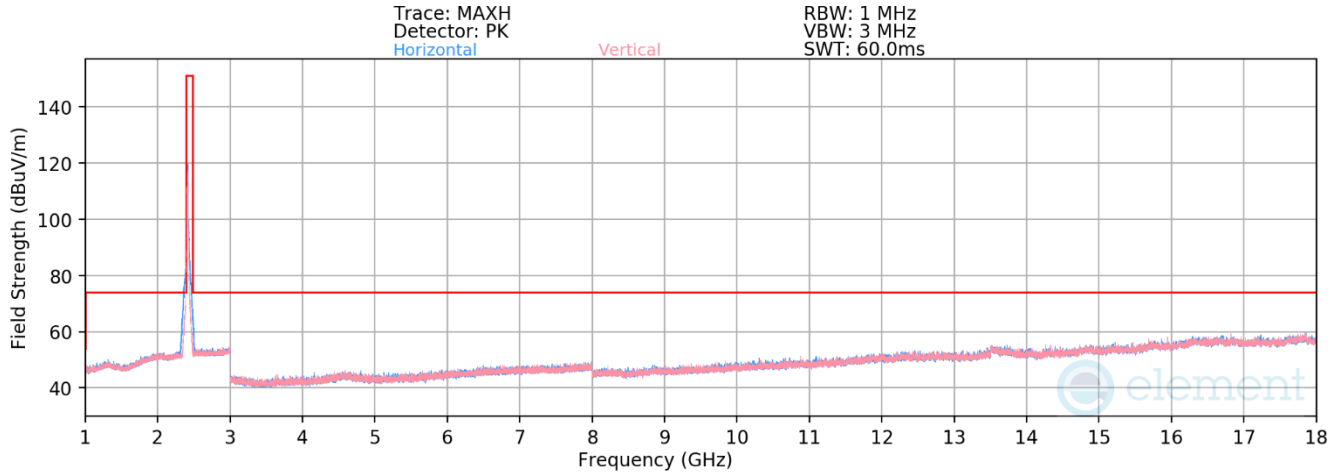


**Plot 7-144. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 1)**

Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>61</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2412MHz</u>
Channel:	<u>01</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	-	-	-	-78.91	6.05	34.14	53.98	-19.84
4824.00	Peak	-	-	-	-67.37	6.05	45.68	73.98	-28.30
12060.00	Avg	-	-	-	-81.26	15.40	41.14	53.98	-12.84
12060.00	Peak	-	-	-	-69.69	15.40	52.71	73.98	-21.27

**Table 7-35. Radiated Measurements CDD (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device		Page 114 of 154

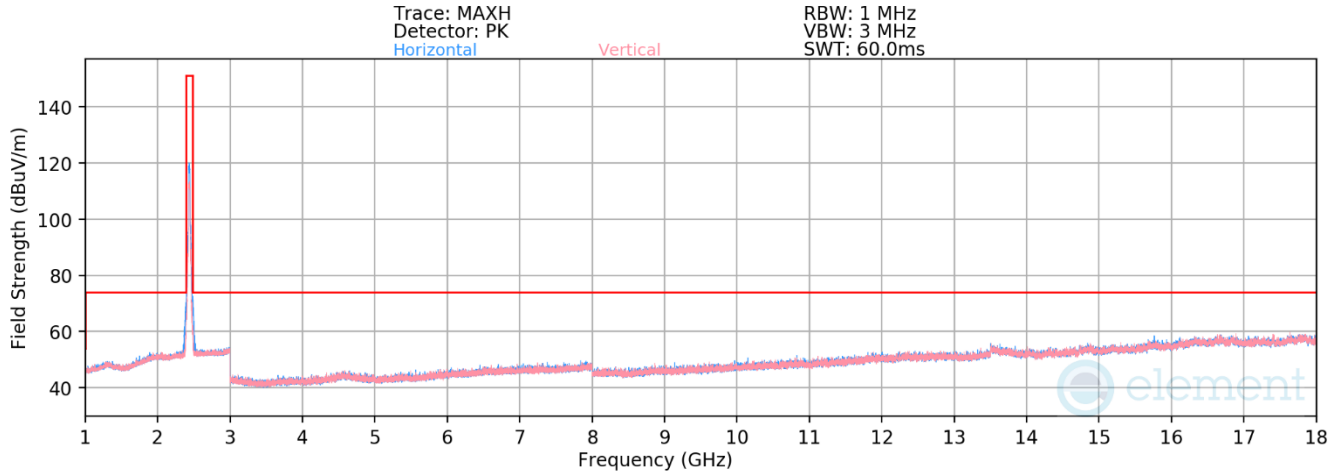

**Plot 7-145. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 6)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	-	-	-	-78.87	6.00	34.13	53.98	-19.85
4874.00	Peak	-	-	-	-66.75	6.00	46.25	73.98	-27.73
7311.00	Avg	-	-	-	-78.92	8.66	36.74	53.98	-17.24
7311.00	Peak	-	-	-	-67.39	8.66	48.27	73.98	-25.71
12185.00	Avg	-	-	-	-80.54	15.32	41.78	53.98	-12.20
12185.00	Peak	-	-	-	-69.23	15.32	53.09	73.98	-20.89

**Table 7-36. Radiated Measurements CDD (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 115 of 154



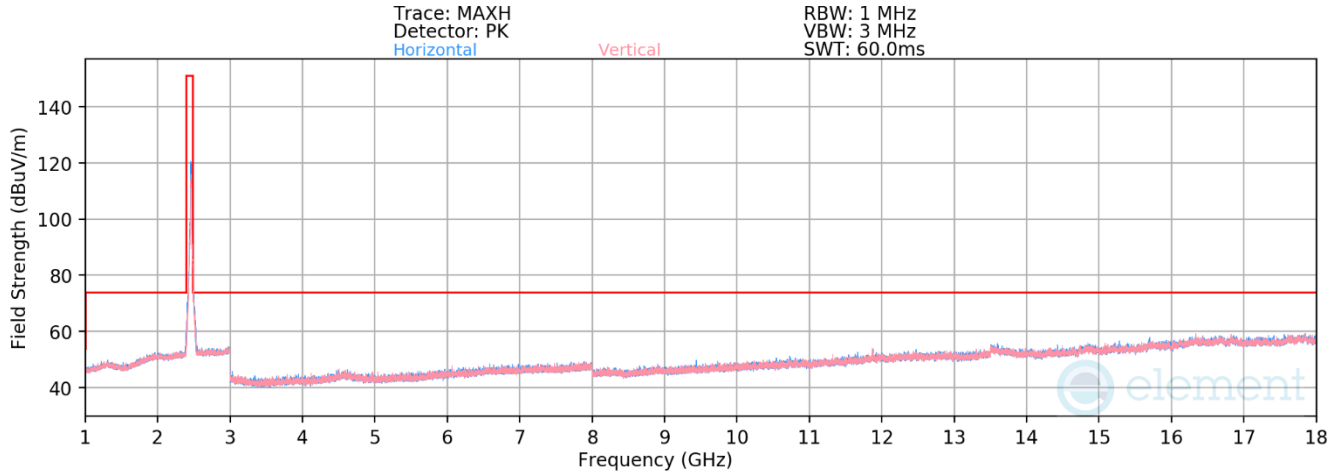

**Plot 7-146. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 11)**


Worst Case Mode:	<u>802.11ax OFDMA</u>
Worst Case Transfer Rate:	<u>MCS9</u>
RU Index:	<u>61</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2462MHz</u>
Channel:	<u>11</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-78.73	5.77	34.04	53.98	-19.94
4924.00	Peak	-	-	-	-66.87	5.77	45.90	73.98	-28.08
7386.00	Avg	-	-	-	-79.12	8.66	36.54	53.98	-17.44
7386.00	Peak	-	-	-	-67.88	8.66	47.78	73.98	-26.20
12310.00	Avg	-	-	-	-81.46	16.06	41.60	53.98	-12.38
12310.00	Peak	-	-	-	-70.14	16.06	52.92	73.98	-21.06


**Table 7-37. Radiated Measurements CDD (RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 116 of 154

**CDD Radiated Spurious Emission Measurements (Above 18GHz)**  
**§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]**

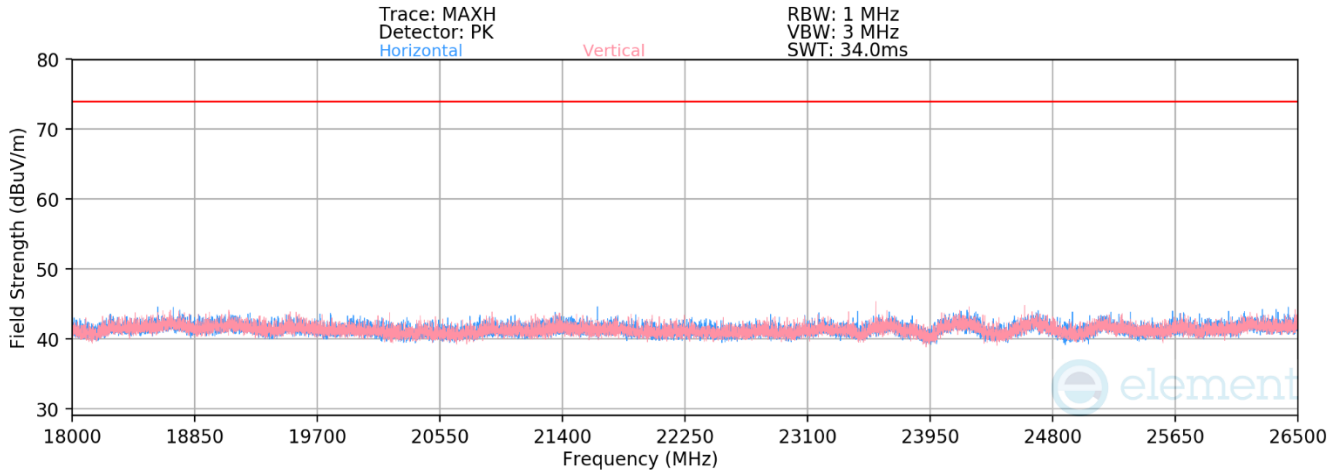

**Plot 7-147. Radiated Spurious Emissions above 18GHz CDD (802.11ax OFDMA – RU26 – Ch. 6)**

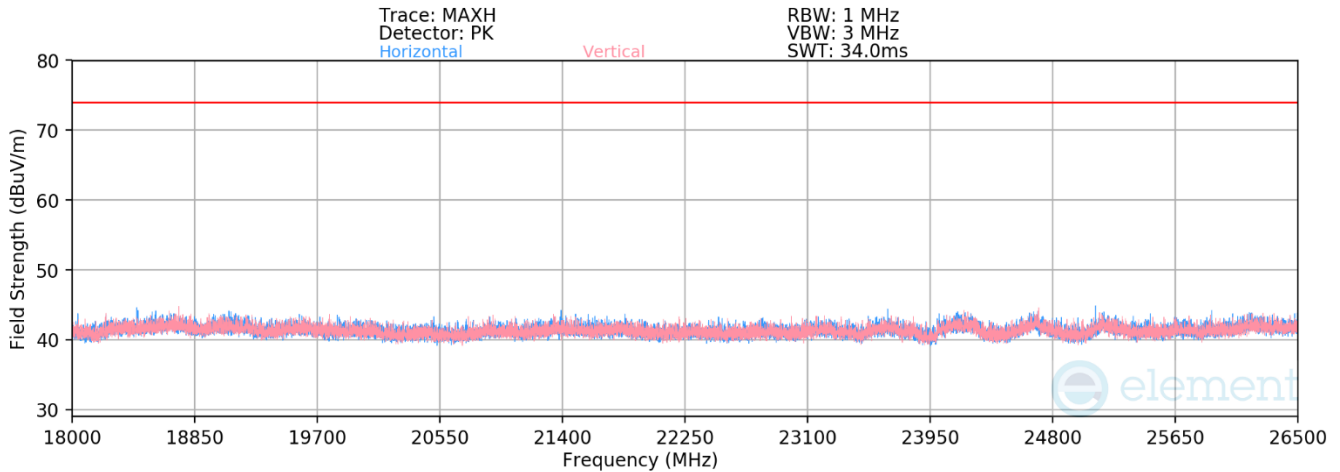


**Plot 7-148. Radiated Spurious Emissions above 18GHz CDD (802.11ax OFDMA – RU242 – Ch. 6)**

<b>FCC ID:</b> BCGA2902 <b>IC:</b> 579C-A2902	 <b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG		<b>Test Dates:</b> 11/29/2023 - 3/4/2024

## 7.7.4 Antenna WF8 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]  
**RU26**

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

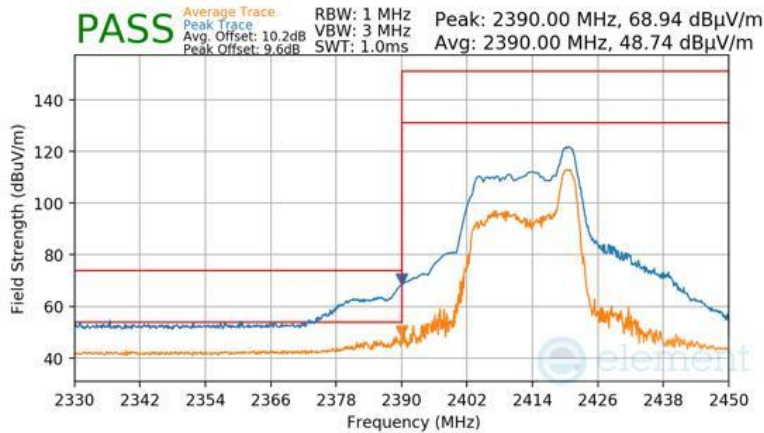

**Plot 7-149 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU26)**


Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

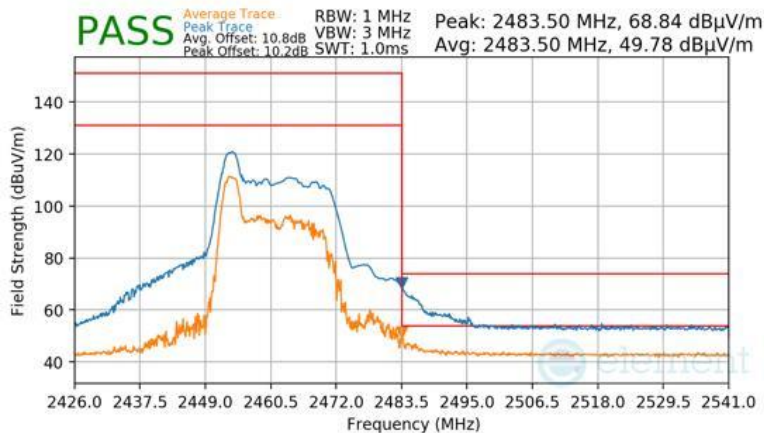

**Plot 7-150 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 118 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

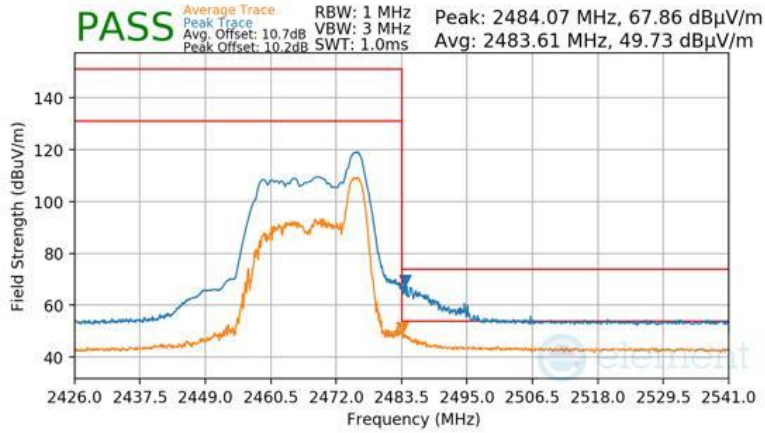


**Plot 7-151 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU26)**

FCC ID: BCGA2902 IC: 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG	<b>Test Dates:</b> 11/29/2023 - 3/4/2024	<b>EUT Type:</b> Tablet Device
		Page 119 of 154


## RU242

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

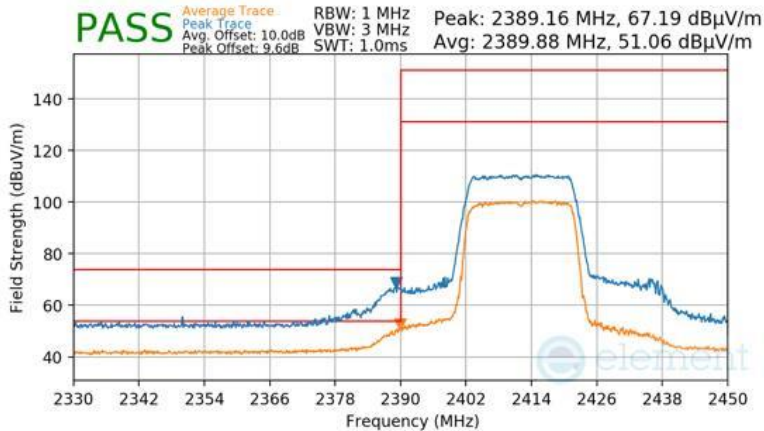

Plot 7-152 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

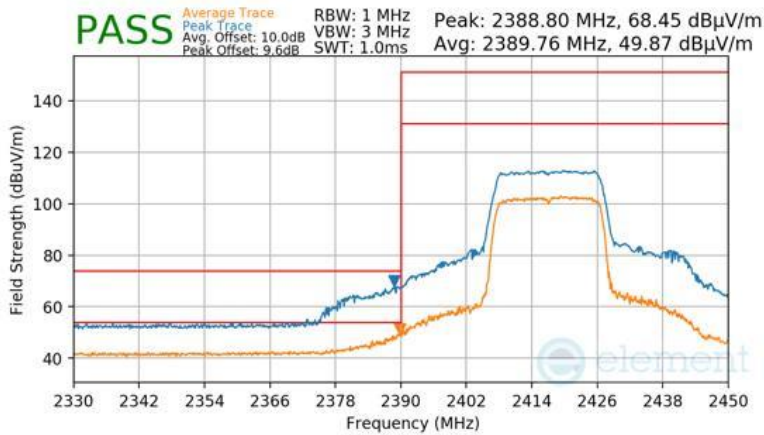

Plot 7-153 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 120 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

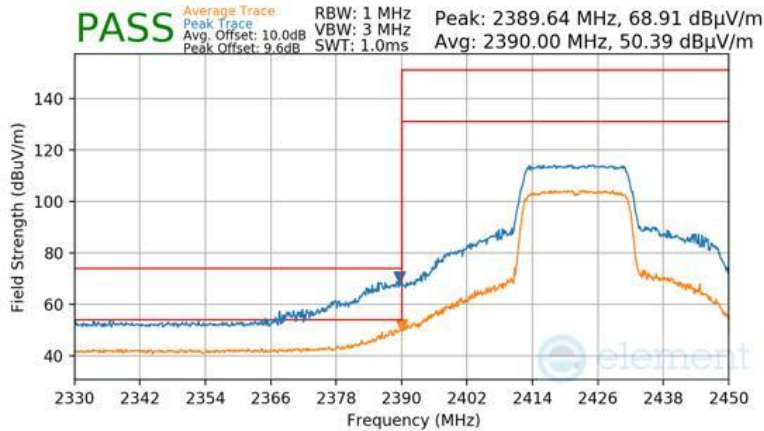

Plot 7-154 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2427MHz  
 Channel: 4

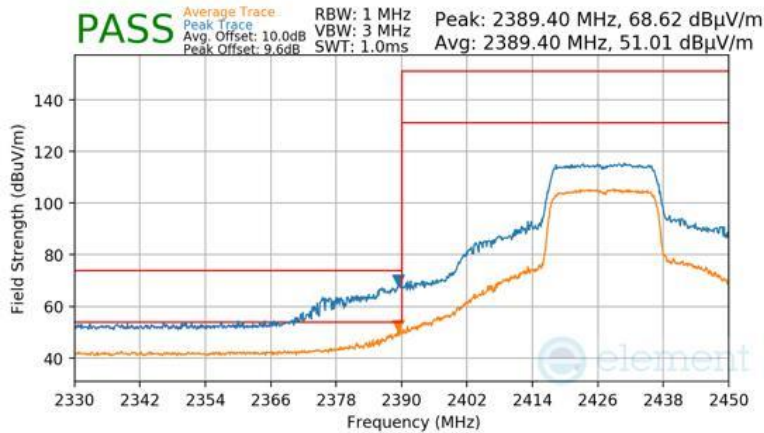

Plot 7-155 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 121 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2432MHz  
 Channel: 5

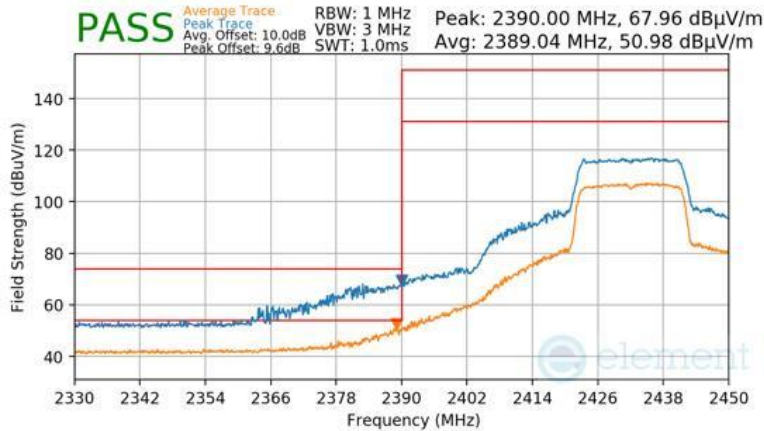

Plot 7-156 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

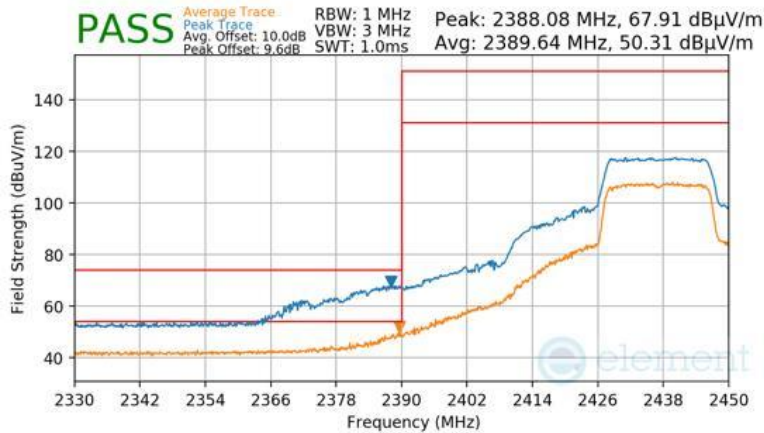

Plot 7-157 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 122 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

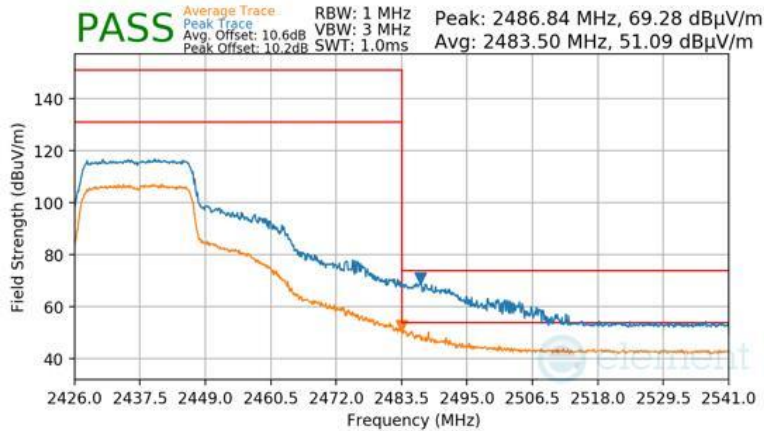

**Plot 7-158 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)**

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2442MHz  
 Channel: 7

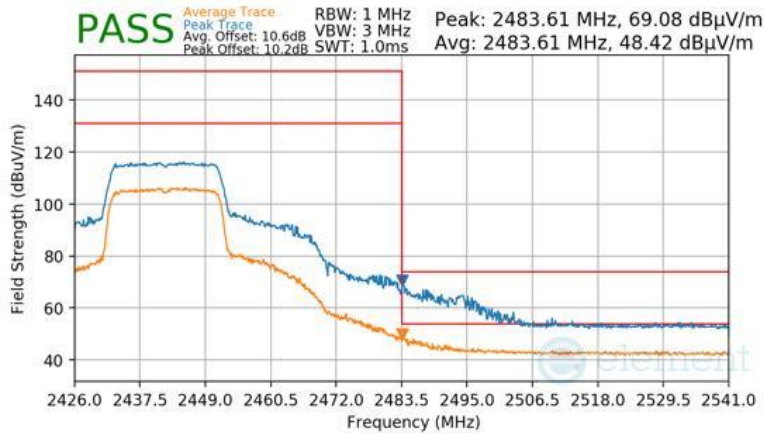


**Plot 7-159 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG	<b>Test Dates:</b> 11/29/2023 - 3/4/2024	<b>EUT Type:</b> Tablet Device	Page 123 of 154




Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

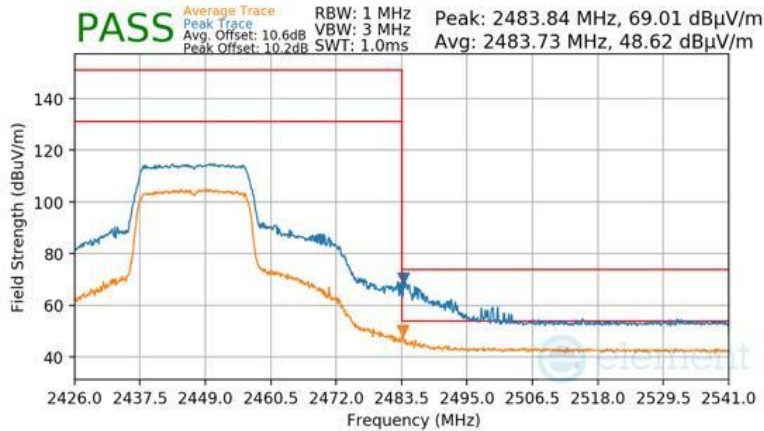

Plot 7-160 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

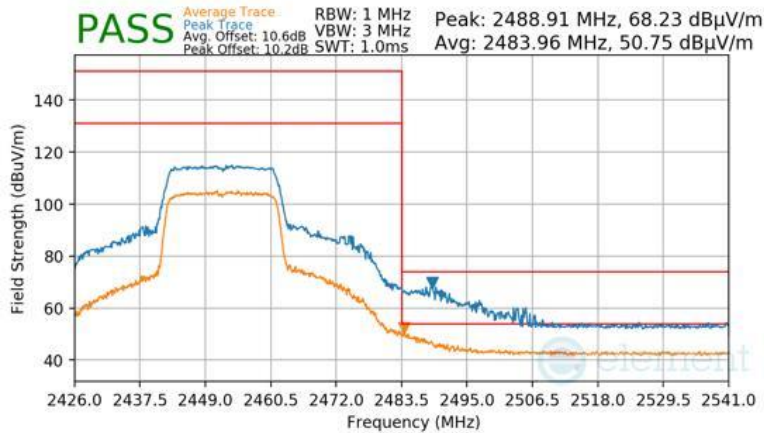

Plot 7-161 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 124 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

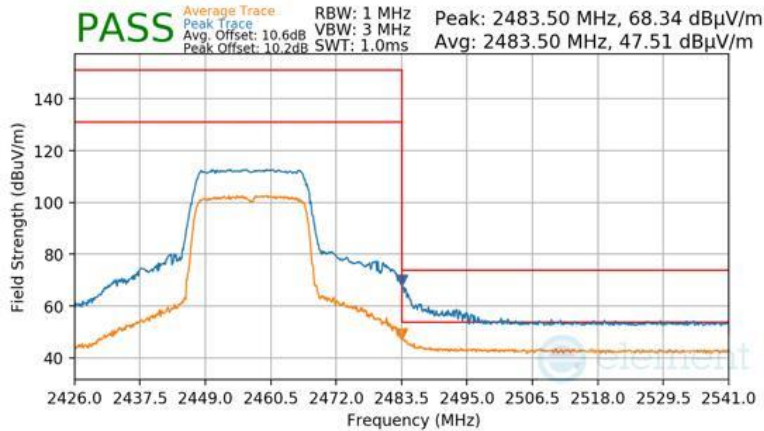

Plot 7-162 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

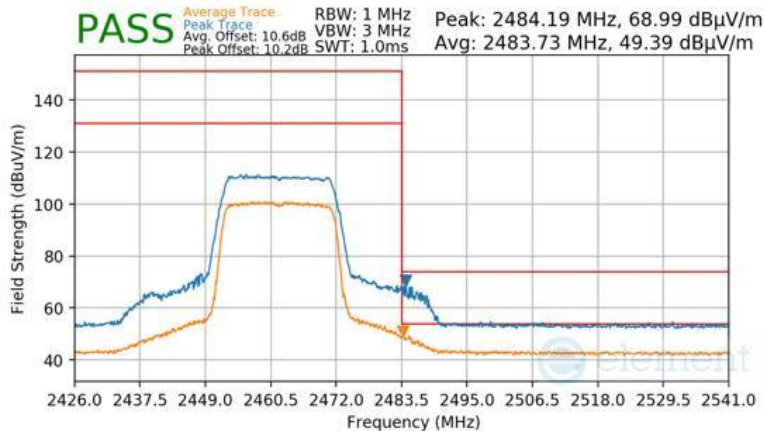

Plot 7-163 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 125 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

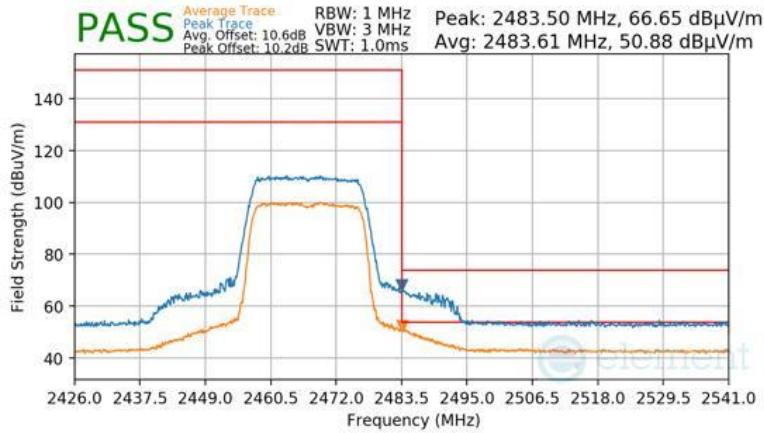

Plot 7-164 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF8 (PEAK & AVERAGE – RU242)


<b>FCC ID:</b> BCGA2902 <b>IC:</b> 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG		<b>Test Dates:</b> 11/29/2023 - 3/4/2024

## 7.7.5 Antenna WF7b Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


RU26

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

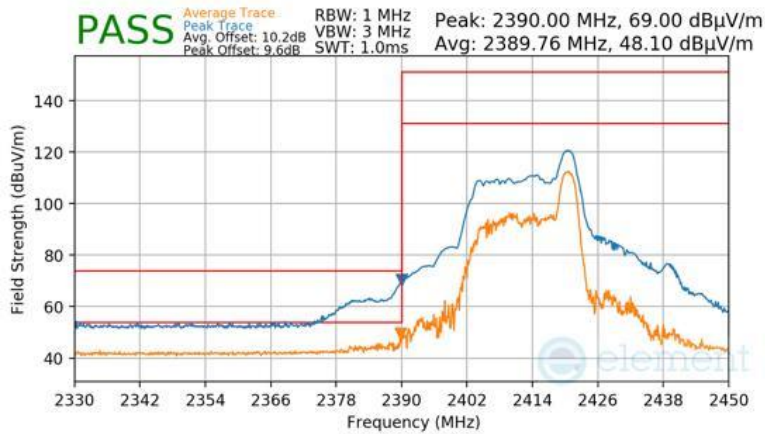

Plot 7-165 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU26)


Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

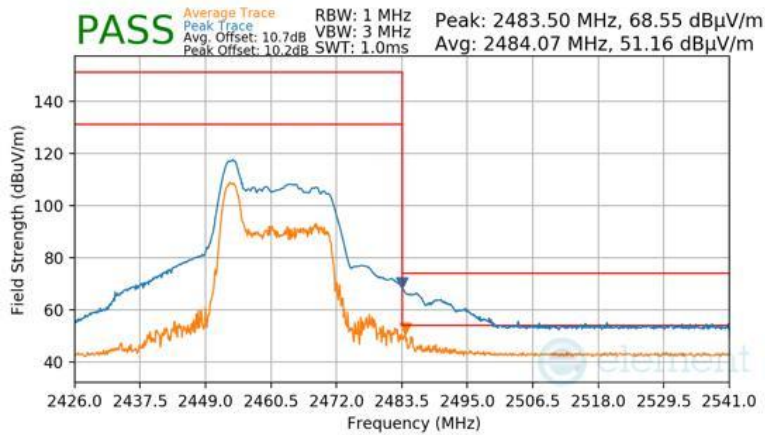

Plot 7-166 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU26)

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 127 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

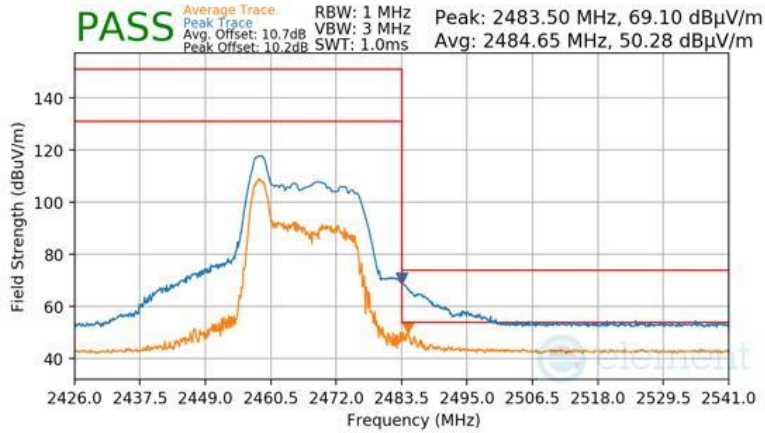


Plot 7-167 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU26)

FCC ID: BCGA2902 IC: 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG	<b>Test Dates:</b> 11/29/2023 - 3/4/2024	<b>EUT Type:</b> Tablet Device
		Page 128 of 154


## RU242

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

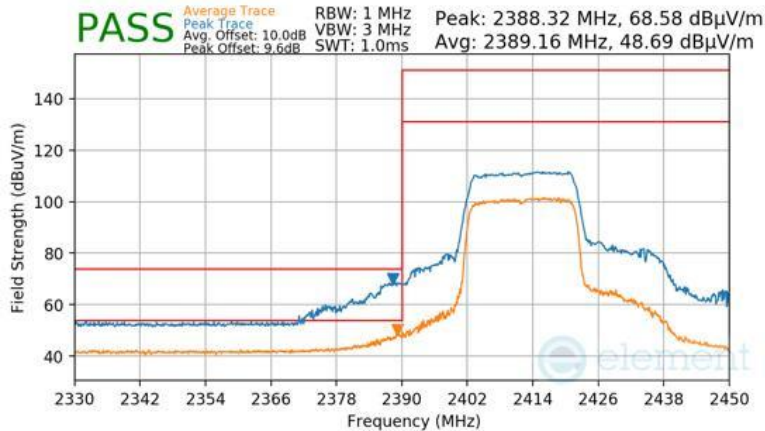

Plot 7-168 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)


Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

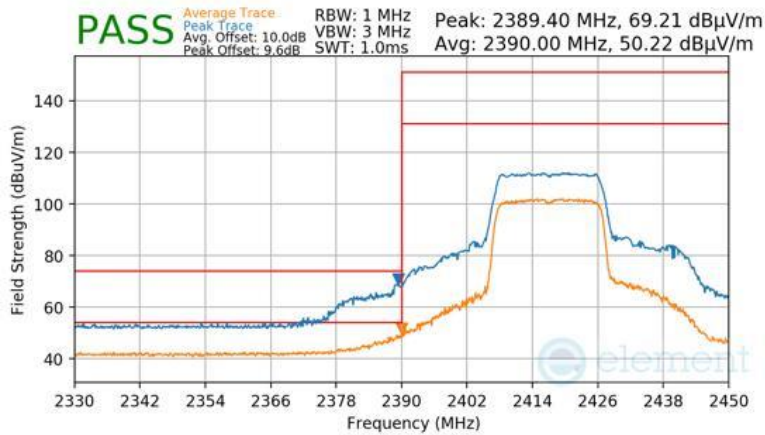

Plot 7-169 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 129 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

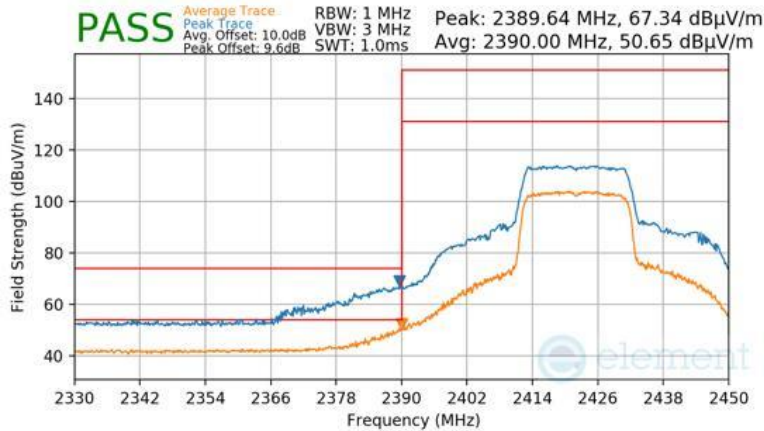

**Plot 7-170 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)**


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2427MHz  
 Channel: 4

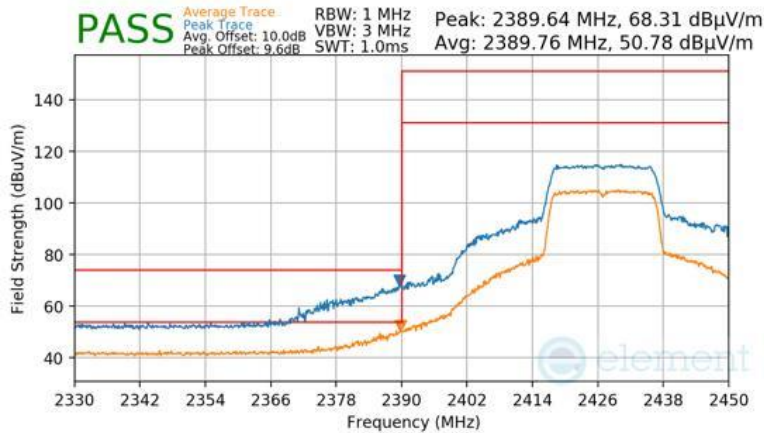

**Plot 7-171 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)**


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 130 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

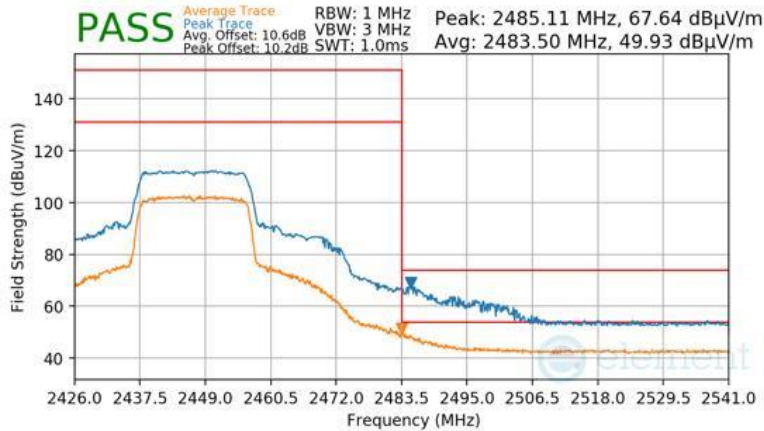

Plot 7-172 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

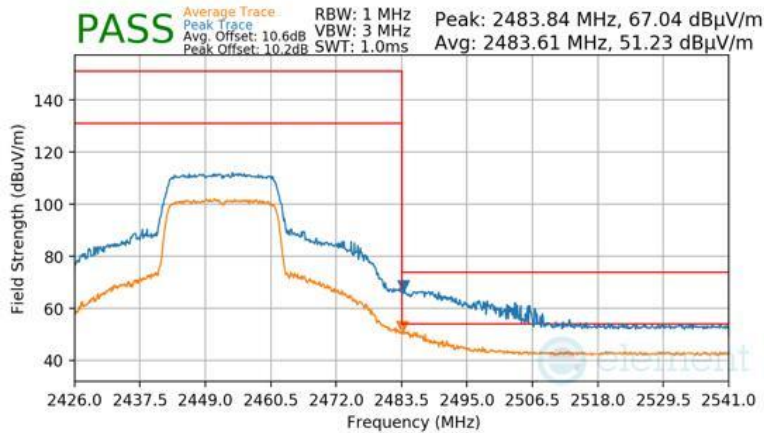


Plot 7-173 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 131 of 154




Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

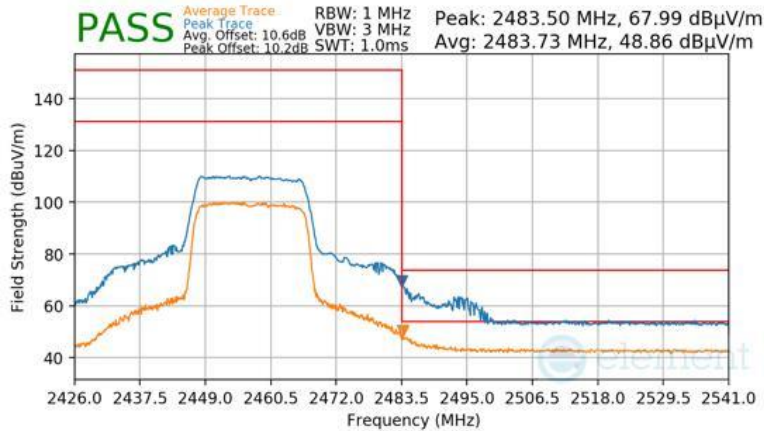

Plot 7-174 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

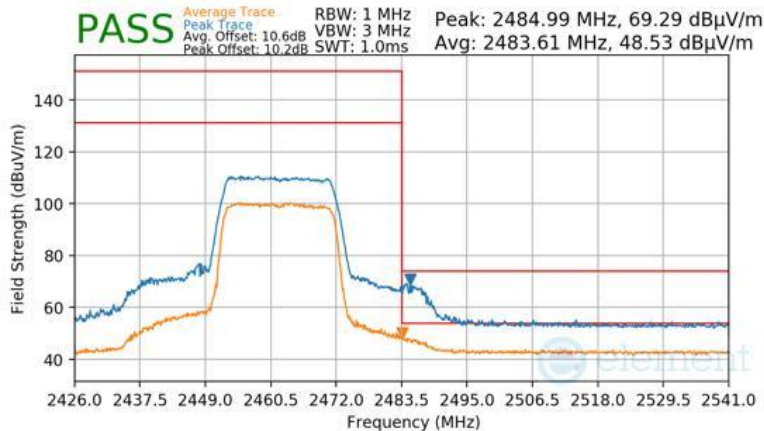

Plot 7-175 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 132 of 154

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

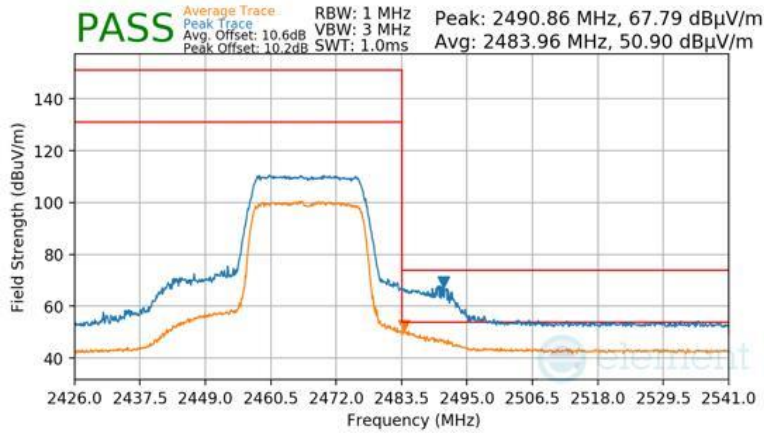

**Plot 7-176 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT ANTENNA WF7B (PEAK & AVERAGE – RU242)**


<b>FCC ID:</b> BCGA2902 <b>IC:</b> 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG		<b>Test Dates:</b> 11/29/2023 - 3/4/2024

## 7.7.6 CDD Radiated Restricted Band Edge Measurements

\$15.205 \$15.209; RSS-Gen [8.9]


**RU26**

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

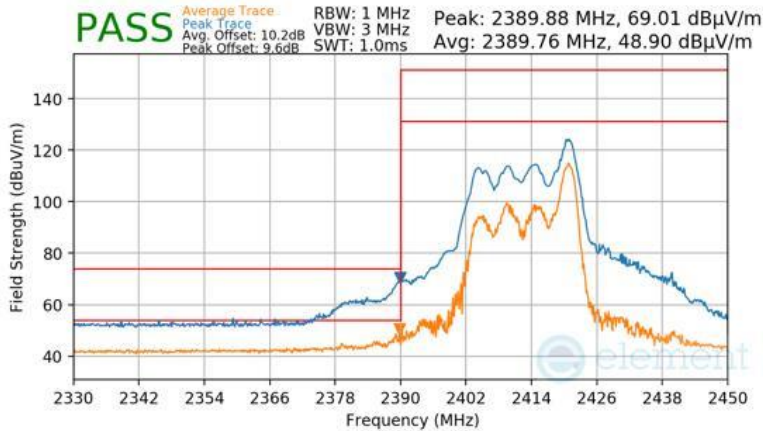

**Plot 7-177 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU26)**


Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10

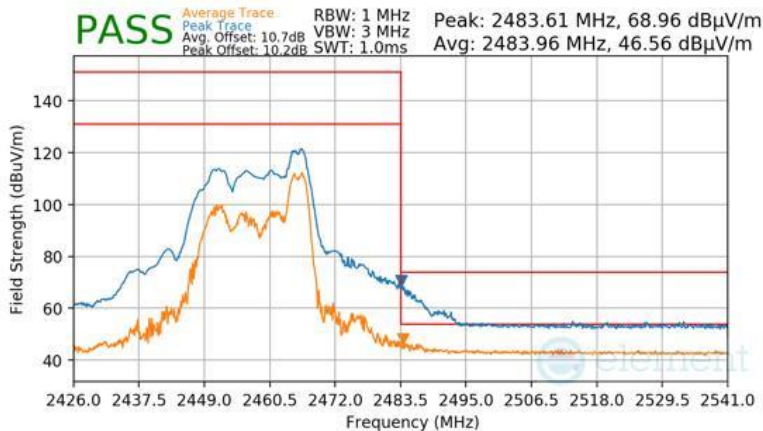

**Plot 7-178 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU26)**


FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG	<b>Test Dates:</b> 11/29/2023 - 3/4/2024	<b>EUT Type:</b> Tablet Device	Page 134 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

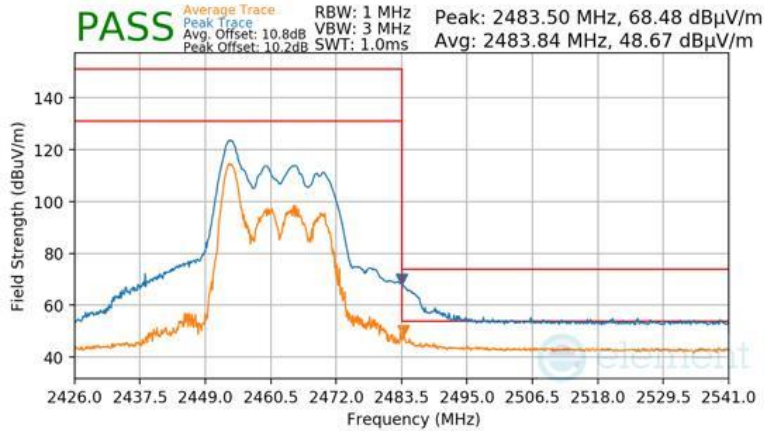

**Plot 7-179 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU26)**

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

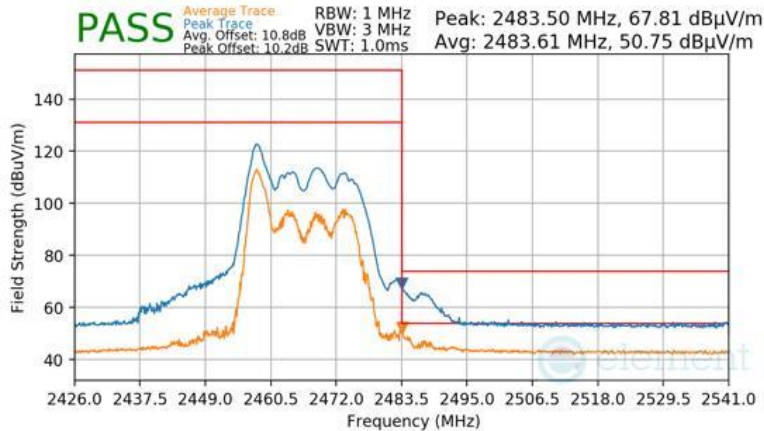


**Plot 7-180 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU26)**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG	<b>Test Dates:</b> 11/29/2023 - 3/4/2024	<b>EUT Type:</b> Tablet Device	Page 135 of 154


## RU242

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

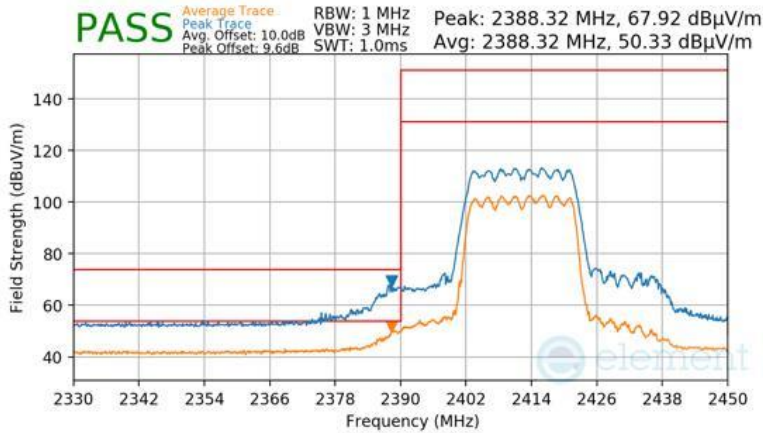

**Plot 7-181 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**


Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

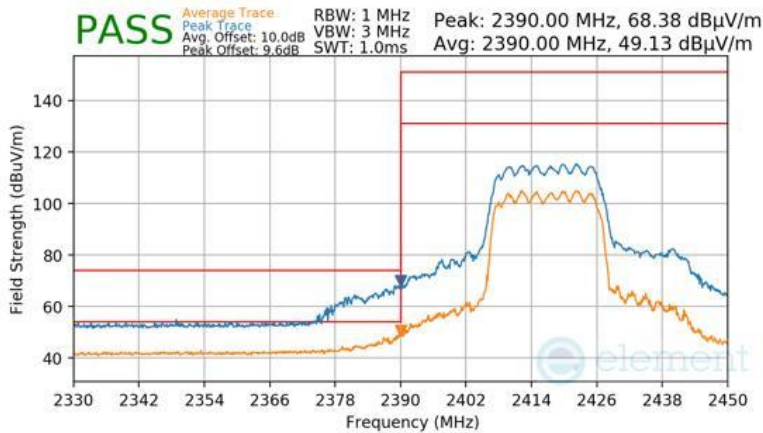

**Plot 7-182 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**


FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 136 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

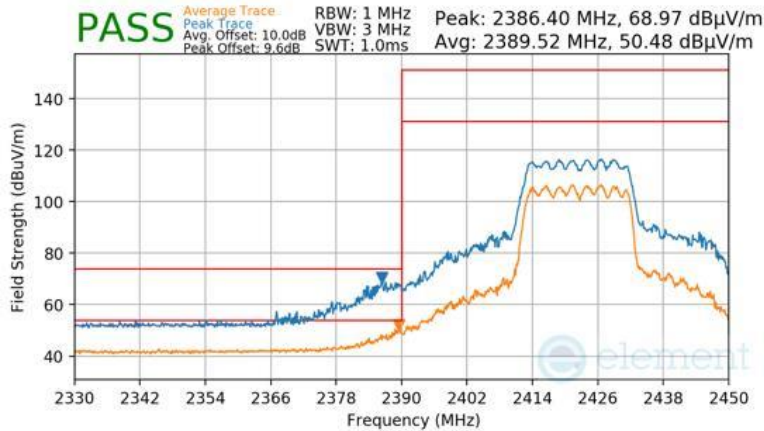

**Plot 7-183 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2427MHz  
 Channel: 4

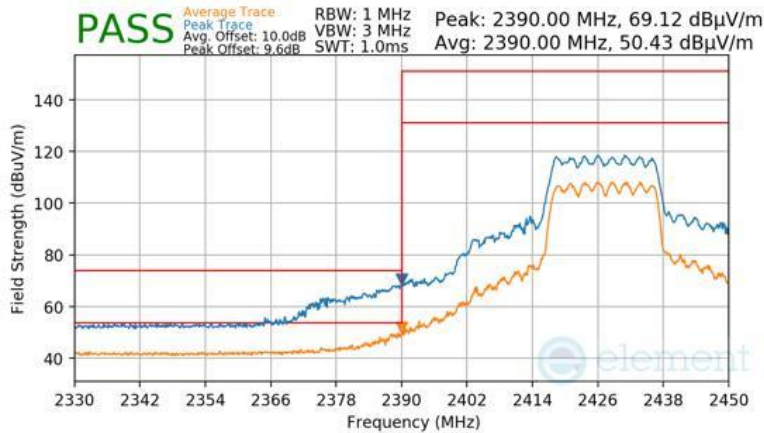

**Plot 7-184 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 137 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2432MHz  
 Channel: 5

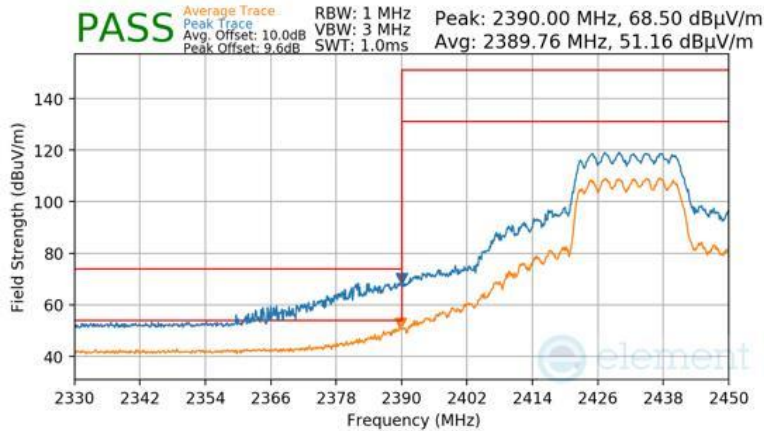

Plot 7-185 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

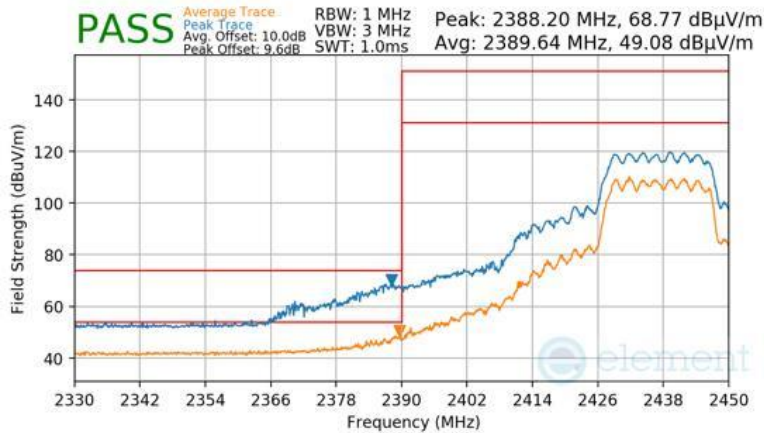

Plot 7-186 RADIATED RESTRICTED LOWER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 138 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

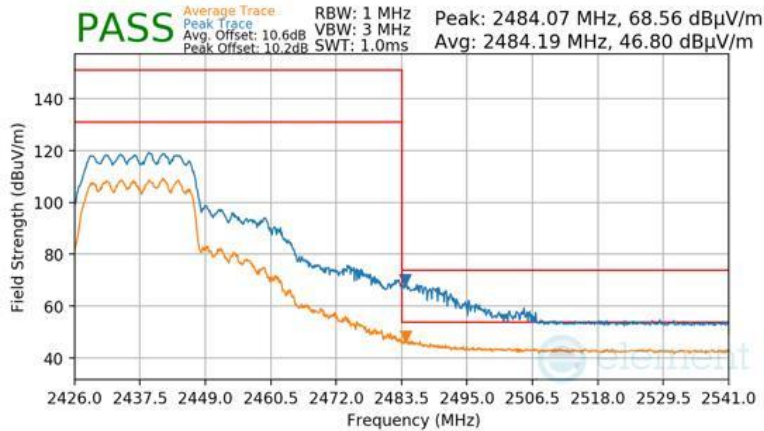

**Plot 7-187 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2442MHz  
 Channel: 7

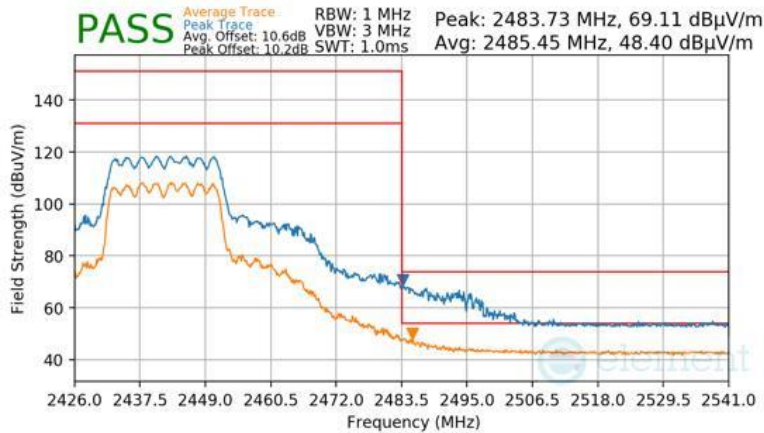


**Plot 7-188 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 139 of 154




Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

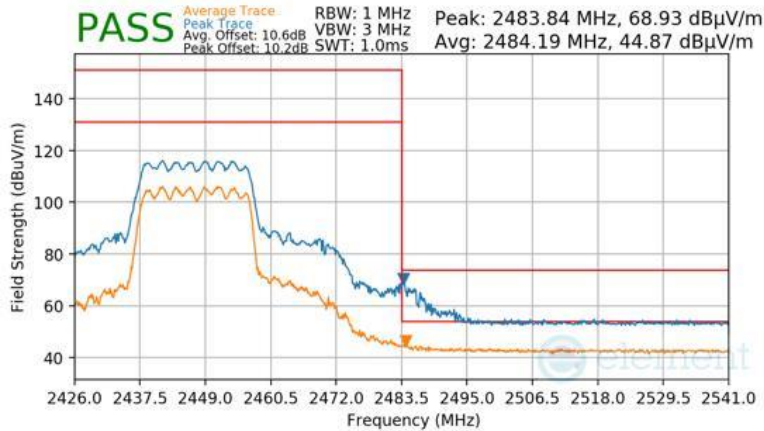

**Plot 7-189 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

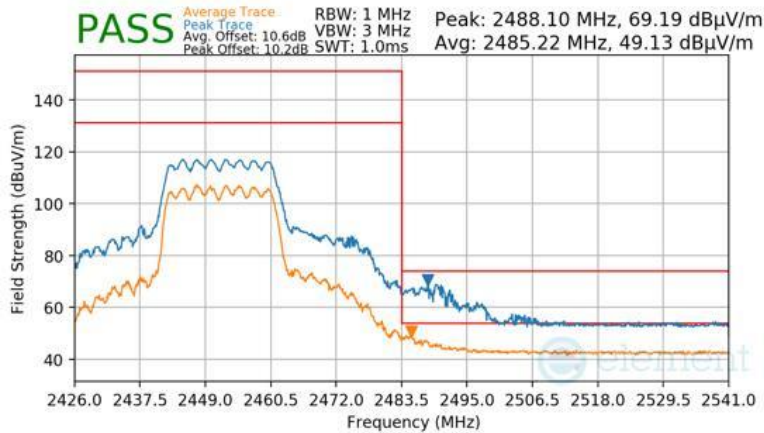

**Plot 7-190 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**


FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 140 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

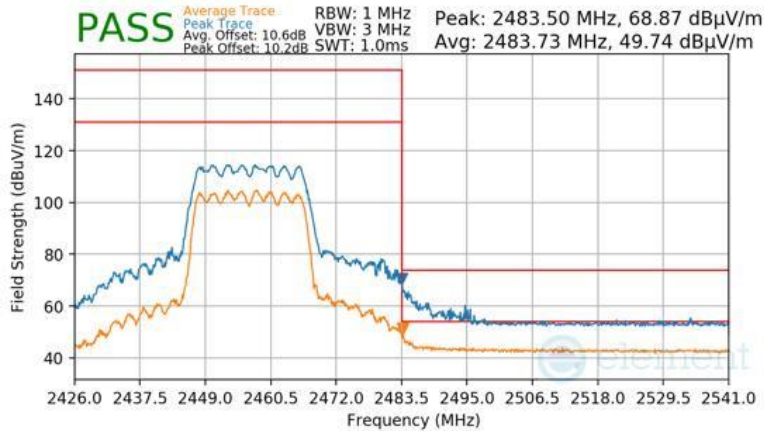

**Plot 7-191 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**


Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

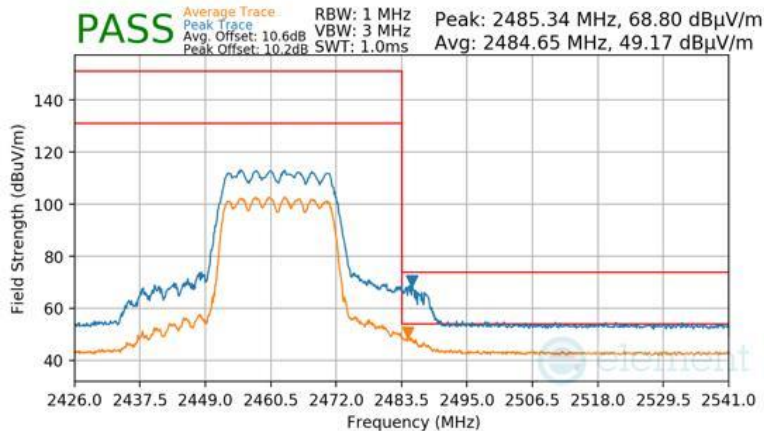

**Plot 7-192 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 141 of 154

Mode: 802.11ax OFDMA  
 Transfer Rate: MCS9  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

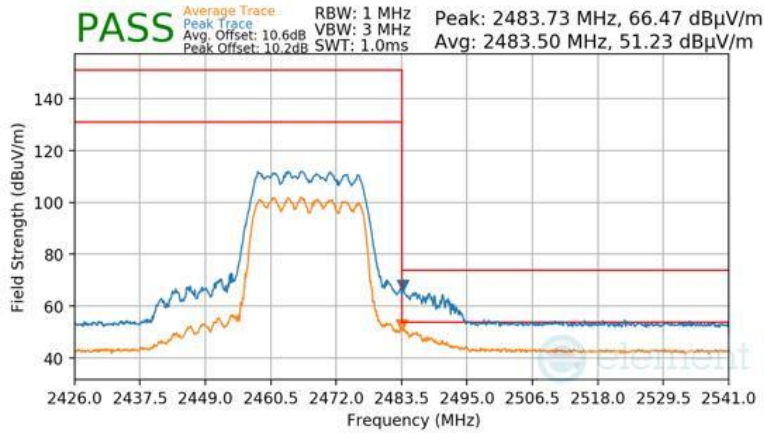

**Plot 7-193 RADIATED RESTRICTED UPPER BAND EDGE MEASUREMENT CDD (PEAK & AVERAGE – RU242)**

<b>FCC ID:</b> BCGA2902 <b>IC:</b> 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG		<b>Test Dates:</b> 11/29/2023 - 3/4/2024

## 7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-38 per Section 15.209 and RSS-Gen (8.9).**

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-38. Radiated Limits

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 143 of 154


V 10.5 12/15/2021

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

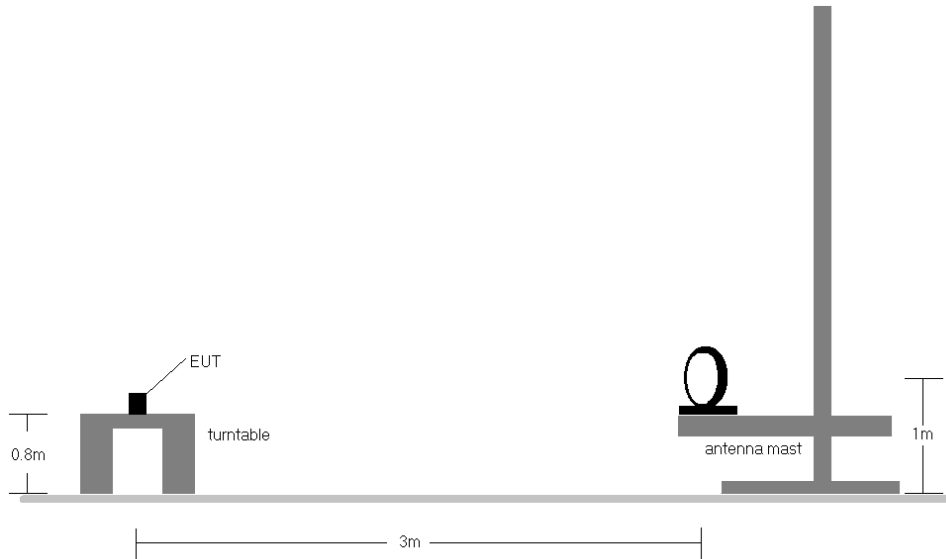

**Figure 7-7. Radiated Test Setup < 30MHz**

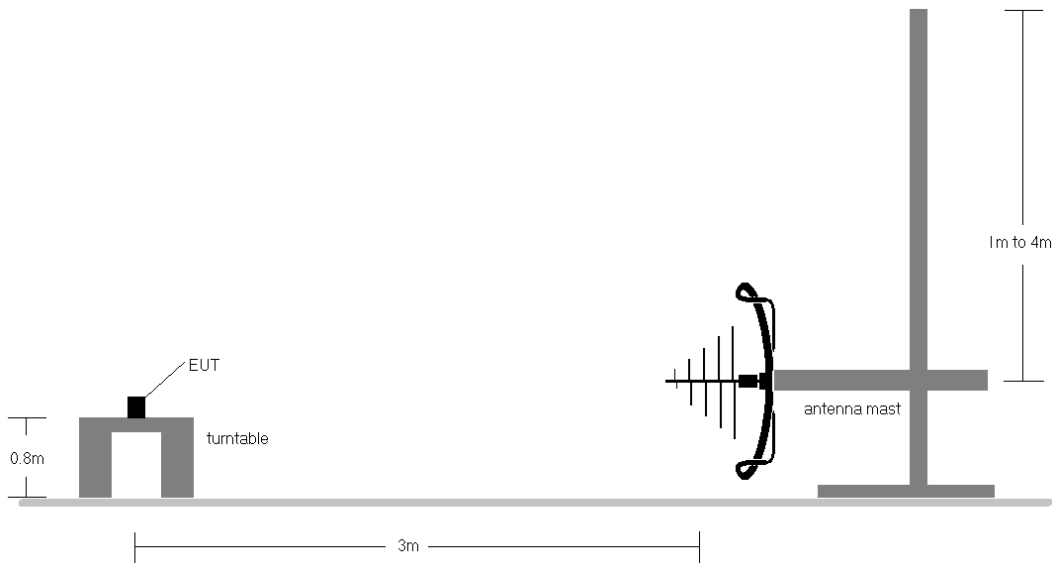

**Figure 7-8. Radiated Test Setup < 1GHz**

<b>FCC ID:</b> BCGA2902 <b>IC:</b> 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG	<b>Test Dates:</b> 11/29/2023 - 3/4/2024	<b>EUT Type:</b> Tablet Device
		Page 144 of 154

**Test Notes**

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-38.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
4. Emissions were measured at a 3 meter test distance.
5. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
6. No spurious emissions were detected within 20dB of the limit below 30MHz.
7. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
8. All antenna configurations and data rates were investigated and only the worst case are reported.
9. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.
10. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger

**Sample Calculations**


**Determining Spurious Emissions Levels**

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]

<b>FCC ID:</b> BCGA2902 <b>IC:</b> 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG	<b>Test Dates:</b> 11/29/2023 - 3/4/2024	<b>EUT Type:</b> Tablet Device
		Page 145 of 154

## CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

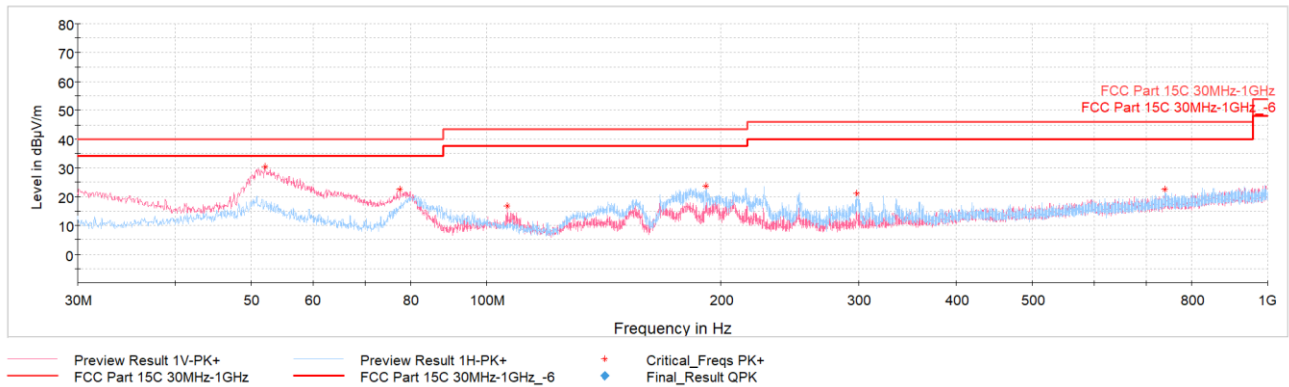


Plot 7-194. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
52.12	Max-Peak	V	100	358	-63.74	-12.93	30.33	40.00	-9.67
77.53	Max-Peak	V	300	16	-63.33	-21.08	22.59	40.00	-17.41
106.48	Max-Peak	V	100	184	-73.70	-16.52	16.78	43.52	-26.74
191.26	Max-Peak	H	100	186	-66.43	-17.01	23.56	43.52	-19.96
298.50	Max-Peak	H	100	329	-71.68	-14.20	21.12	46.02	-24.90
739.56	Max-Peak	H	100	300	-79.00	-5.58	22.42	46.02	-23.60

Table 7-39. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device		Page 146 of 154

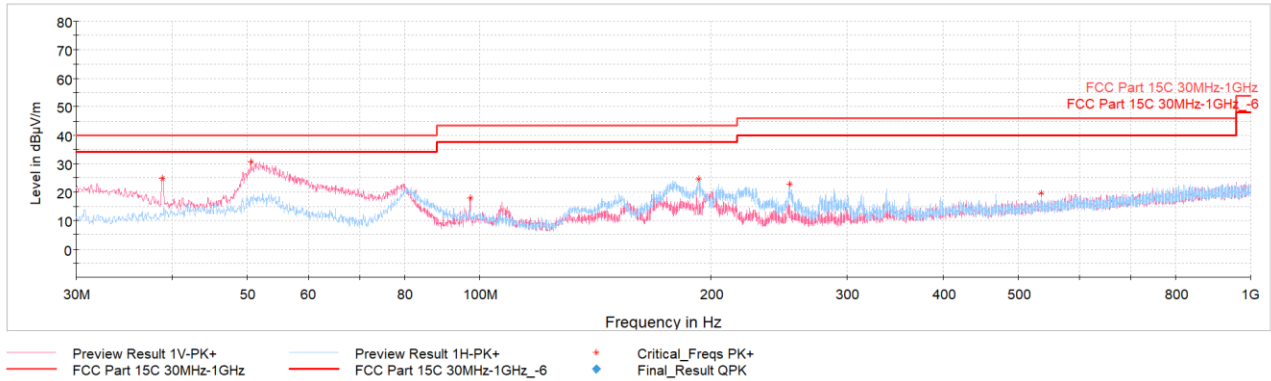

**Plot 7-195. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
38.88	Max-Peak	V	100	168	-67.55	-14.52	24.93	40.00	-15.07
50.61	Max-Peak	V	100	15	-63.65	-12.67	30.68	40.00	-9.32
97.32	Max-Peak	V	200	7	-72.59	-16.63	17.78	43.52	-25.74
192.38	Max-Peak	H	100	137	-65.62	-16.85	24.53	43.52	-18.99
252.71	Max-Peak	H	100	131	-69.29	-15.04	22.67	46.02	-23.35
535.86	Max-Peak	H	300	115	-78.30	-9.14	19.56	46.02	-26.46

**Table 7-40. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter**

FCC ID: BCGA2902 IC: 579C-A2902		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device		Page 147 of 154



## 7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-41. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Subclause 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Average Measurements


1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 148 of 154

V 10.5 12/15/2021

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

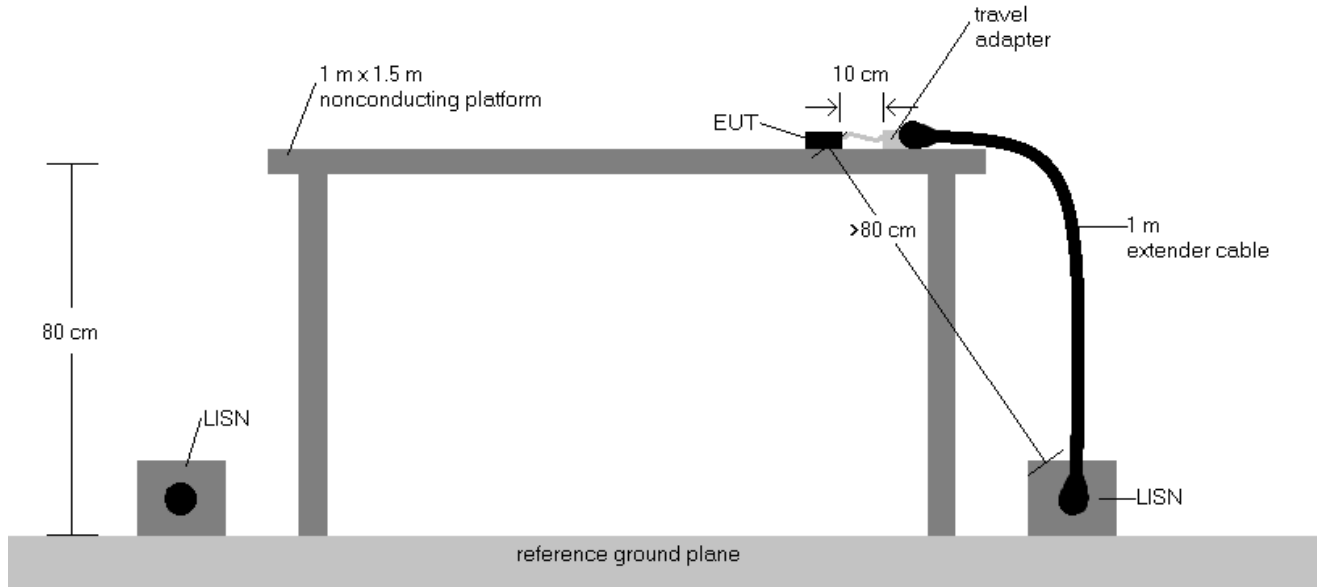

**Figure 7-9. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6.  $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 149 of 154

V 10.5 12/15/2021




**Plot 7-196. AC Line Conducted Emissions with 802.11ax (RU26) Ch.6 CDD (L1, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	---	25.40	55.06	-29.66	L1	GND
0.168	FINAL	45.0	---	65.06	-20.03	L1	GND
0.238	FINAL	---	22.00	52.17	-30.17	L1	GND
0.238	FINAL	41.1	---	62.17	-21.05	L1	GND
0.744	FINAL	---	20.91	46.00	-25.09	L1	GND
0.744	FINAL	28.2	---	56.00	-27.85	L1	GND
1.453	FINAL	19.6	---	56.00	-36.37	L1	GND
1.453	FINAL	---	10.28	46.00	-35.72	L1	GND
4.592	FINAL	25.3	---	56.00	-30.70	L1	GND
4.592	FINAL	---	15.30	46.00	-30.70	L1	GND
29.929	FINAL	13.4	---	60.00	-46.58	L1	GND
29.938	FINAL	---	7.73	50.00	-42.27	L1	GND

**Table 7-42. AC Line Conducted Data with 802.11ax (RU26) Ch.6 CDD (L1, with AC/DC Adapter)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 150 of 154

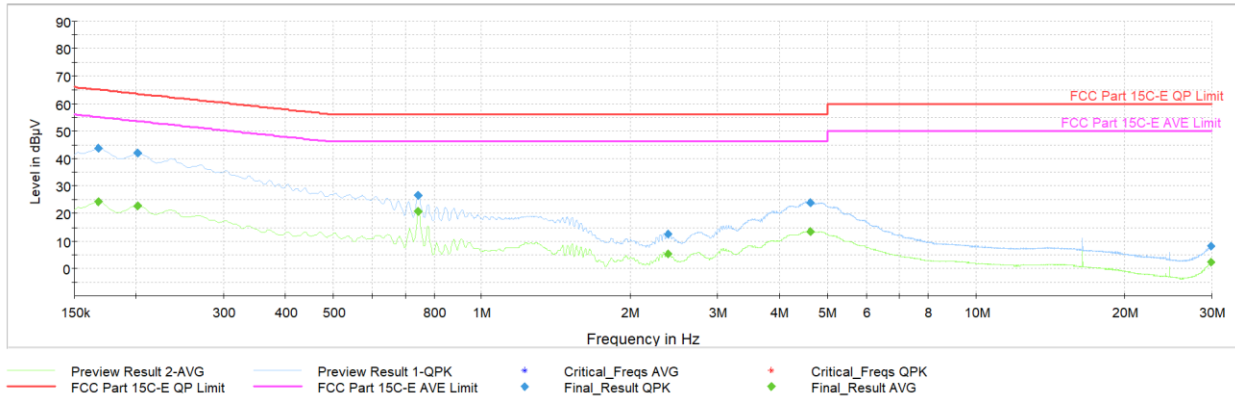


**Plot 7-197. AC Line Conducted Emissions with 802.11ax (RU26) Ch.6 CDD (N, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	---	24.29	55.06	-30.77	N	GND
0.168	FINAL	43.8	---	65.06	-21.24	N	GND
0.202	FINAL	---	22.87	53.54	-30.67	N	GND
0.202	FINAL	42.0	---	63.54	-21.53	N	GND
0.744	FINAL	---	20.82	46.00	-25.18	N	GND
0.744	FINAL	26.5	---	56.00	-29.48	N	GND
2.378	FINAL	12.6	---	56.00	-43.37	N	GND
2.378	FINAL	---	5.06	46.00	-40.94	N	GND
4.625	FINAL	23.8	---	56.00	-32.16	N	GND
4.625	FINAL	---	13.38	46.00	-32.62	N	GND
29.904	FINAL	---	2.38	50.00	-47.62	N	GND
29.904	FINAL	8.2	---	60.00	-51.81	N	GND

**Table 7-43. AC Line Conducted Data with 802.11ax (RU26) Ch.6 CDD (N, with AC/DC Adapter)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 151 of 154

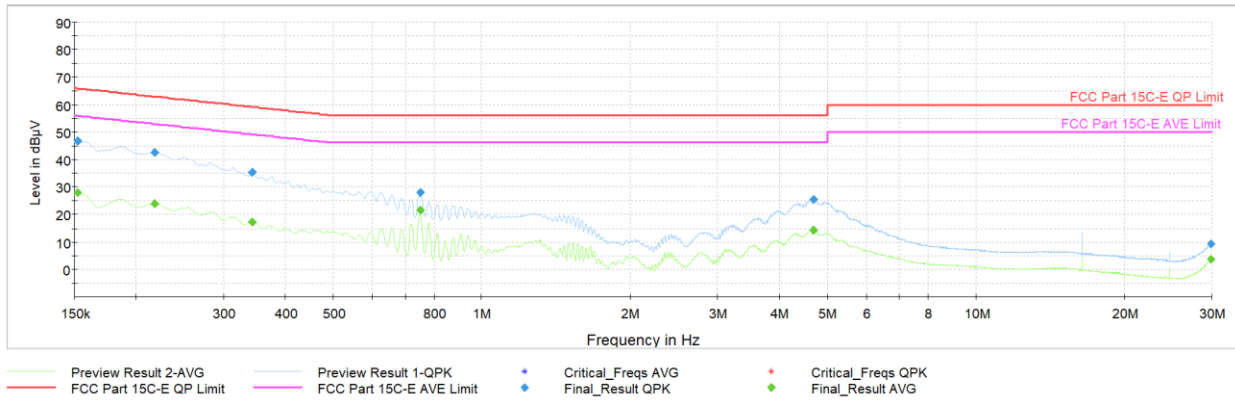


**Plot 7-198. AC Line Conducted Emissions with 802.11ax (RU242) Ch.6 CDD (L1, with AC/DC Charger)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	---	27.87	55.88	-28.00	L1	GND
0.152	FINAL	46.6	---	65.88	-19.23	L1	GND
0.218	FINAL	---	23.83	52.91	-29.09	L1	GND
0.218	FINAL	42.7	---	62.91	-20.23	L1	GND
0.344	FINAL	---	17.29	49.12	-31.83	L1	GND
0.344	FINAL	35.2	---	59.12	-23.90	L1	GND
0.751	FINAL	27.9	---	56.00	-28.08	L1	GND
0.751	FINAL	---	21.53	46.00	-24.47	L1	GND
4.700	FINAL	25.3	---	56.00	-30.66	L1	GND
4.700	FINAL	---	14.13	46.00	-31.87	L1	GND
29.909	FINAL	---	3.61	50.00	-46.39	L1	GND
29.909	FINAL	9.2	---	60.00	-50.79	L1	GND

**Table 7-44. AC Line Conducted Data with 802.11ax (RU242) Ch.6 CDD (L1, with AC/DC Charger)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 152 of 154

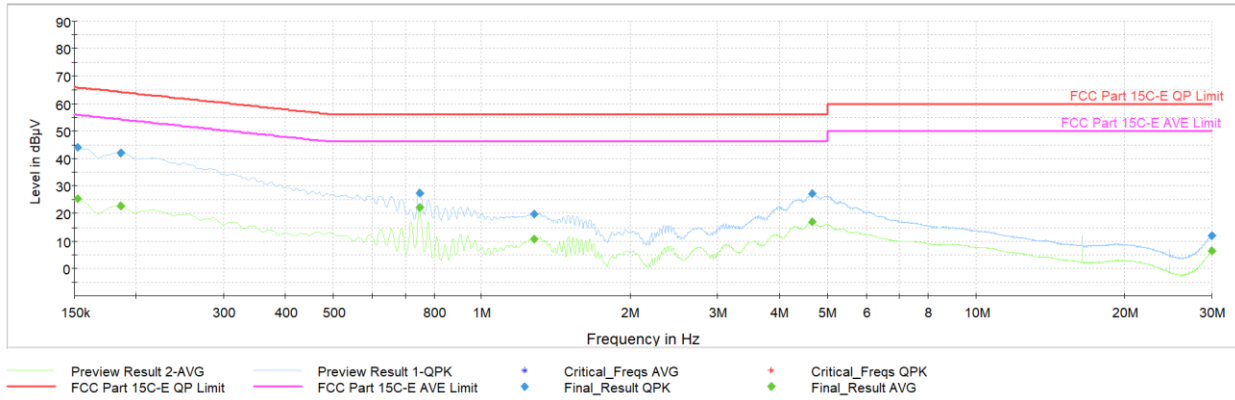

**Plot 7-199. AC Line Conducted Emissions with 802.11ax (RU242) Ch.6 CDD (N, with AC/DC Charger)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	---	25.24	55.88	-30.63	N	GND
0.152	FINAL	44.1	---	65.88	-21.80	N	GND
0.186	FINAL	---	22.79	54.21	-31.43	N	GND
0.186	FINAL	42.0	---	64.21	-22.25	N	GND
0.749	FINAL	---	22.06	46.00	-23.94	N	GND
0.749	FINAL	27.4	---	56.00	-28.56	N	GND
1.275	FINAL	19.8	---	56.00	-36.18	N	GND
1.275	FINAL	---	10.90	46.00	-35.10	N	GND
4.661	FINAL	27.0	---	56.00	-28.98	N	GND
4.661	FINAL	---	16.82	46.00	-29.18	N	GND
29.951	FINAL	---	6.42	50.00	-43.58	N	GND
29.951	FINAL	12.0	---	60.00	-47.98	N	GND

**Table 7-45. AC Line Conducted Data with 802.11ax (RU242) Ch.6 CDD (N, with AC/DC Charger)**

FCC ID: BCGA2902 IC: 579C-A2902		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270063-04.BCG	Test Dates: 11/29/2023 - 3/4/2024	EUT Type: Tablet Device	Page 153 of 154

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2902, IC: 579C-A2902** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

<b>FCC ID:</b> BCGA2902 <b>IC:</b> 579C-A2902	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270063-04.BCG	<b>Test Dates:</b> 11/29/2023 - 3/4/2024	<b>EUT Type:</b> Tablet Device
		Page 154 of 154

V 10.5 12/15/2021