

Element Materials Technology

(formerly PCTEST) 18855 Adams Court, Morgan Hill, CA 95037 USA Tel. 408.538.5600 http://www.element.com



PART 22 MEASUREMENT REPORT

Applicant Name:

Apple Inc.

One Apple Park Way Cupertino, CA 95014

United States

Date of Testing:

10/1/2023 - 3/21/2024

Test Report Issue Date:

4/2/2024

Test Site/Location:

Element Materials Technology

Test Report Serial No.:

1C2311270064-07.BCG

FCC ID: **BCGA2903**

Applicant Name: Apple Inc.

Application Type: Certification Model: A2903, A2904 **EUT Type: Tablet Device**

FCC Classification: PCS Licensed Transmitter (PCB)

FCC Rule Part:

Test Procedure(s): ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01

v03r01


This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RI Ortanez

Executive Vice President

Prepared by: WKR0000006193







FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 1 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	rage 1 01 109



TABLE OF CONTENTS

1.0	INTF	RODUCTION	5
	1.1	Scope	5
	1.2	Element Materials Technology Test Location	5
	1.3	Test Facility / Accreditations	5
2.0	PRC	DDUCT INFORMATION	6
	2.1	Equipment Description	6
	2.2	Device Capabilities	6
	2.3	Antenna Description	8
	2.4	Test Support Equipment	8
	2.5	Test Configuration	8
	2.6	Software and Firmware	8
	2.7	EMI Suppression Device(s)/Modifications	8
3.0	DES	SCRIPTION OF TESTS	g
	3.1	Measurement Procedure	9
	3.2	Radiated Spurious Emissions	9
4.0	MEA	ASUREMENT UNCERTAINTY	10
5.0	TES	T EQUIPMENT CALIBRATION DATA	11
6.0	SAM	IPLE CALCULATIONS	12
7.0	TES	T RESULTS	13
	7.1	Summary	13
	7.2	Occupied Bandwidth	14
	7.3	Spurious and Harmonic Emissions at Antenna Terminal	36
	7.4	Band Edge Emissions at Antenna Terminal	58
	7.5	Radiated Power (ERP)	78
	7.6	Radiated Spurious Emissions	90
	7.7	Frequency Stability / Temperature Variation	105
8.0	CON	NCLUSION	109

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 2 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 2 01 109





PART 22 MEASUREMENT REPORT



		Ty Fraguency			ERP		- Cruinnian
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	Max. Power [W]	Max. Power [dBm]	Emission Designator
WCDMA850	5 MHz	Spread Spectrum	826.4 - 846.6	4.1627	0.184	22.65	4M16F9W
	1.4 MHz	QPSK	824.7 - 848.3	1.1097	0.181	22.58	1M11G7W
		16QAM	824.7 - 848.3	1.1069	0.151	21.80	1M11D7W
		64QAM	824.7 - 848.3	1.1018	0.122	20.85	1M10D7W
		256QAM	824.7 - 848.3	1.1056	0.059	17.74	1M11D7W
		QPSK	825.5 - 847.5	2.7170	0.177	22.47	2M72G7W
	3 MHz	16QAM	825.5 - 847.5	2.7188	0.152	21.82	2M72D7W
	3 IVITZ	64QAM	825.5 - 847.5	2.7182	0.121	20.82	2M72D7W
Band 5		256QAM	825.5 - 847.5	2.7178	0.068	18.32	2M72D7W
Danu 5		QPSK	826.5 - 846.5	4.5386	0.184	22.65	4M54G7W
	5 MH-	16QAM	826.5 - 846.5	4.5559	0.161	22.06	4M56D7W
	5 MHz	64QAM	826.5 - 846.5	4.5314	0.121	20.83	4M53D7W
		256QAM	826.5 - 846.5	4.5362	0.063	17.98	4M54D7W
		QPSK	829.0 - 844.0	9.0482	0.180	22.55	9M05G7W
	40 MH-	16QAM	829.0 - 844.0	9.0295	0.152	21.81	9M03D7W
	10 MHz	64QAM	829.0 - 844.0	9.0148	0.118	20.73	9M01D7W
		256QAM	829.0 - 844.0	8.9942	0.060	17.79	8M99D7W
		QPSK	824.7 - 848.3	1.1097	0.182	22.59	1M11G7W
	4.4.04.1-	16QAM	824.7 - 848.3	1.1069	0.146	21.65	1M11D7W
	1.4 MHz	64QAM	824.7 - 848.3	1.1018	0.117	20.68	1M10D7W
		256QAM	824.7 - 848.3	1.1056	0.059	17.74	1M11D7W
		QPSK	825.5 - 847.5	2.7170	0.179	22.54	2M72G7W
	3 MHz	16QAM	825.5 - 847.5	2.7188	0.159	22.01	2M72D7W
	3 IVITZ	64QAM	825.5 - 847.5	2.7182	0.120	20.78	2M72D7W
David OC		256QAM	825.5 - 847.5	2.7178	0.060	17.79	2M72D7W
Band 26		QPSK	826.5 - 846.5	4.5386	0.184	22.65	4M54G7W
	5 MHz	16QAM	826.5 - 846.5	4.5559	0.160	22.03	4M56D7W
	5 IVITZ	64QAM	826.5 - 846.5	4.5314	0.122	20.87	4M53D7W
		256QAM	826.5 - 846.5	4.5362	0.058	17.65	4M54D7W
		QPSK	829.0 - 844.0	9.0482	0.180	22.56	9M05G7W
	40 MH-	16QAM	829.0 - 844.0	9.0295	0.159	22.01	9M03D7W
	10 MHz	64QAM	829.0 - 844.0	9.0148	0.121	20.81	9M01D7W
		256QAM	829.0 - 844.0	8.9942	0.062	17.92	8M99D7W
		QPSK	829.0 - 844.0	18.8830	0.173	22.37	18M9G7W
	40 . 40 141	16QAM	829.0 - 844.0	18.8700	0.074	18.70	18M9D7W
ULCA Band 5	10 + 10 MHz	64QAM	829.0 - 844.0	18.8920	0.073	18.66	18M9D7W
		256QAM	829.0 - 844.0	18.8810	0.047	16.72	18M9D7W

EUT Overview

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 3 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	raye 3 Ul 109



			Tx Frequency ODW MILE		Ef	₹P	Emission
Mode	Bandwidth	Modulation	Range [MHz]	OBW [MHz]	Max. Power [W]	Max. Power [dBm]	Designator
		π/2 BPSK	826.5 - 846.5	4.4600	0.184	22.65	4M46G7W
		QPSK	826.5 - 846.5	4.4811	0.182	22.61	4M48G7W
	5 MHz	16QAM	826.5 - 846.5	4.4760	0.143	21.54	4M48D7W
	Ī	64QAM	826.5 - 846.5	4.4545	0.116	20.64	4M45D7W
		256QAM	826.5 - 846.5	4.4878	0.071	18.51	4M49D7W
		π/2 BPSK	829.0 - 844.0	8.9387	0.179	22.53	8M94G7W
		QPSK	829.0 - 844.0	9.2962	0.184	22.65	9M30G7W
	10 MHz	16QAM	829.0 - 844.0	9.2733	0.147	21.66	9M27D7W
		64QAM	829.0 - 844.0	9.2966	0.115	20.59	9M30D7W
NR Band n5		256QAM	829.0 - 844.0	9.2693	0.075	18.77	9M27D7W
INK Danu IIS		π/2 BPSK	831.5 - 841.5	13.4340	0.184	22.65	13M4G7W
		QPSK	831.5 - 841.5	14.1690	0.184	22.65	14M2G7W
	15 MHz	16QAM	831.5 - 841.5	14.1280	0.146	21.63	14M1D7W
		64QAM	831.5 - 841.5	14.0990	0.116	20.66	14M1D7W
		256QAM	831.5 - 841.5	14.0920	0.073	18.61	14M1D7W
		π/2 BPSK	834.0 - 839.0	17.8780	0.181	22.58	17M9G7W
		QPSK	834.0 - 839.0	18.9000	0.178	22.50	18M9G7W
	20 MHz	16QAM	834.0 - 839.0	18.9250	0.142	21.52	18M9D7W
		64QAM	834.0 - 839.0	18.9080	0.116	20.63	18M9D7W
		256QAM	834.0 - 839.0	18.9280	0.073	18.61	18M9D7W
		π/2 BPSK	826.5 - 846.5	4.4600	0.176	22.45	4M46G7W
		QPSK	826.5 - 846.5	4.4811	0.180	22.55	4M48G7W
	5 MHz	16QAM	826.5 - 846.5	4.4760	0.147	21.68	4M48D7W
		64QAM	826.5 - 846.5	4.4545	0.117	20.67	4M45D7W
		256QAM	826.5 - 846.5	4.4878	0.072	18.59	4M49D7W
		π/2 BPSK	829.0 - 844.0	8.9387	0.184	22.65	8M94G7W
		QPSK	829.0 - 844.0	9.2962	0.180	22.55	9M30G7W
	10 MHz	16QAM	829.0 - 844.0	9.2733	0.151	21.79	9M27D7W
		64QAM	829.0 - 844.0	9.2966	0.116	20.63	9M30D7W
NR Band n26		256QAM	829.0 - 844.0	9.2693	0.074	18.66	9M27D7W
INIX Darid 1120		π/2 BPSK	831.5 - 841.5	13.4340	0.179	22.54	13M4G7W
		QPSK	831.5 - 841.5	14.1690	0.180	22.55	14M2G7W
	15 MHz	16QAM	831.5 - 841.5	14.1280	0.145	21.63	14M1D7W
		64QAM	831.5 - 841.5	14.0990	0.114	20.58	14M1D7W
		256QAM	831.5 - 841.5	14.0920	0.076	18.78	14M1D7W
		π/2 BPSK	834.0 - 839.0	17.8780	0.178	22.50	17M9G7W
		QPSK	834.0 - 839.0	18.9000	0.180	22.55	18M9G7W
	20 MHz	16QAM	834.0 - 839.0	18.9250	0.147	21.67	18M9D7W
		64QAM	834.0 - 839.0	18.9080	0.116	20.65	18M9D7W
		256QAM	834.0 - 839.0	18.9280	0.073	18.61	18M9D7W

EUT Overview

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 4 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 4 01 109



1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations Element Materials Technology

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutal Recognition Agreements (MRAs).

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 5 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	raye 3 Ul 109



2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2903**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

Test Device Serial No.: RH779H9653, W046C4WFF6, F1Y0XGN9Q3, DLXGYH0000A0000EVL, DLXGY90000D0000EVP

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

		Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII	LTE/FF	R1 NR
Antenna	Simultaneous Tx Config	802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8	МВ/НВ	UHB
3a	Config 1	Х	✓	Х	✓	Х	Х	✓	Χ
3a	Config 2	Х	✓	Х	Х	✓	Х	✓	Х
3a	Config 3	✓	Х	Х	Х	Х	✓	^	X
3a	Config 4	Х	Х	✓	✓	Х	Х	✓	Х
3a	Config 5	Х	Х	✓	Х	✓	Х	✓	Х
3a	Config 6	✓	Х	Х	Х	Х	✓	X	Х
3a	Config 7	✓	Х	Х	Х	Х	Х	^	X
3a	Config 8	X	✓	Х	✓	Х	Х	X	X
3a	Config 9	Х	✓	Х	Х	✓	Х	X	Х
3a	Config 10	Х	✓	Х	Х	Х	Х	✓	Х
3a	Config 11	Х	X	>	✓	Х	X	X	X
3a	Config 13	X	Х	✓	Х	✓	Х	X	X
3a	Config 14	Х	Х	√	Х	Х	Х	✓	Х
3a	Config 15	X	Х	Х	✓	Х	Х	^	X
3a	Config 16	X	Х	Х	Х	✓	Х	^	X
3a	Config 17	Х	Х	Х	Х	Х	✓	✓	Х
1a	Config 18	✓	Х	Х	Х	Х	Х	X	✓
1a	Config 15	Х	✓	Х	Х	Х	Х	Х	✓
1a	Config 16	Х	Х	✓	Х	Х	Х	Х	✓
1b	Config 17	Х	Х	Х	✓	Х	Х	✓	Х
1b	Config 18	Х	Х	Х	Х	✓	Х	✓	Х
1b	Config 19	Х	Х	Х	Х	Х	✓	✓	Х

Table 2-1. Simultaneous Transmission Configurations

√ = Support; × = Not Support

FCC ID: BCGA2903	element	element PART 22 MEASUREMENT REPORT	
FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 6 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 6 01 109



Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in RF UNII OFDM, RF Bluetooth, RF FCC Part 27b test reports.

Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) - BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 7 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage / Oi 109



2.3 Antenna Description

The following antenna gains provided by the manufacturer were used for testing.

Band	Antenna Gain [dBi]			
Bana	Antenna 4	Antenna 3b		
WCDMA 850				
LTE Band 26/5	-2.2	-0.4		
NR Band n26/5				

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-3. Test Support Equipment

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 21E8197 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 8 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage o oi 109



3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the documents titled "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015 and TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure......None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

 $E_{[dB\mu V/m]} = Measured$ amplitude level $_{[dBm]} + 107 + Cable$ Loss $_{[dB]} + Antenna$ Factor $_{[dB/m]}$ And $EIRP_{[dBm]} = E_{[dB\mu V/m]} + 20logD - 104.8$; where D is the measurement distance in meters.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 9 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	rage 9 of 109



4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	2.07
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz-1GHz)	4.85
Radiated Disturbance (1-18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 10 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 10 01 109



5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
ESPEC	SU-241	Tabletop Temperature Chamber	11/17/2023	Annual	11/17/2024	92009574
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	11/5/2023	Annual	11/5/2024	MY57213068
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/30/2023	Annual	11/30/2024	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	12/27/2023	Annual	12/27/2024	164715
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	FSW43	Signal Analyzer (2Hz-43.5GHz)	7/13/2023	Annual	7/13/2024	101261
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

Table 5-1. Test Equipment

Notes:

 For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 11 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 11 01 109



6.0 SAMPLE CALCULATIONS

Emission Designator

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

π/2 BPSK / QPSK Modulation

Emission Designator = 8M62G7W

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W

BW = 8.45 MHz

D = Amplitude/Angle Modulated

7 = Quantized/Digital Info

W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 12 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 12 01 109



7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA2903

FCC Classification: PCS Licensed Transmitter (PCB)

Mode(s): WCDMA/LTE/NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	-13 dBm at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
CONDUCTED	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	< 7 Watts max. ERP	PASS	Section 7.5
	Frequency Stability	2.1055, 22.355	±2.5 ppm	PASS	Section 7.7
RADIATED	Radiated Spurious Emissions	2.1053, 22.917(a)	-13 dBm for all out-of-band emissions	PASS	Section 7.6

Table 7-1. Summary of Test Results

Notes:

- 1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.1

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 13 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	raye 13 01 109



7.2 Occupied Bandwidth §2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 4.2

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth
 and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the
 fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW \geq 3 x RBW
- Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within 1 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

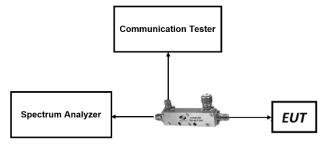


Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 14 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 14 01 109



LTE Band 26/5

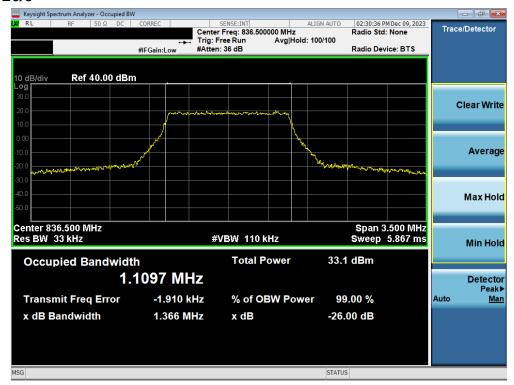

Plot 7-1. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB Configuration)




Plot 7-2. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 15 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 13 01 109






Plot 7-3. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 64-QAM - Full RB Configuration)

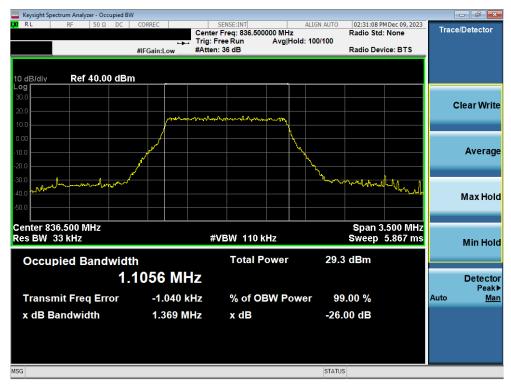

Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 16 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 16 01 109



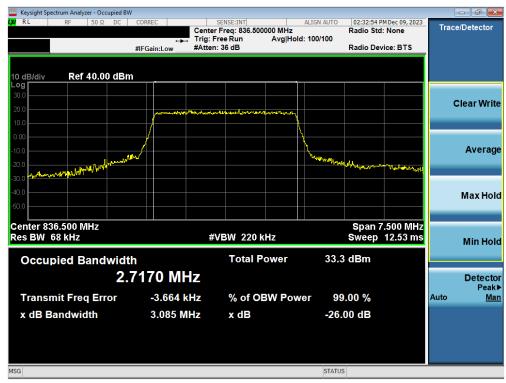

Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB Configuration)



Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 17 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 17 01 109





Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 64-QAM - Full RB Configuration)



Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 18 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 10 01 109





Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB Configuration)




Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 19 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 13 01 109






Plot 7-11. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 64-QAM - Full RB Configuration)

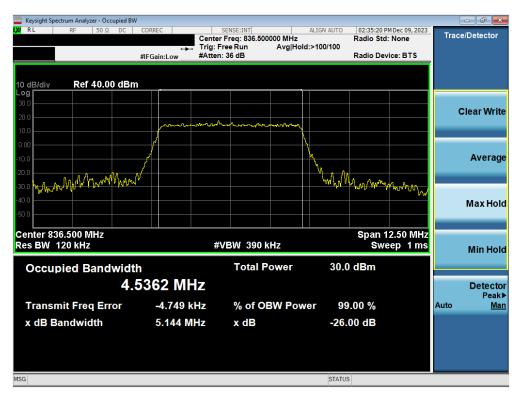

Plot 7-12. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 20 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 20 01 109



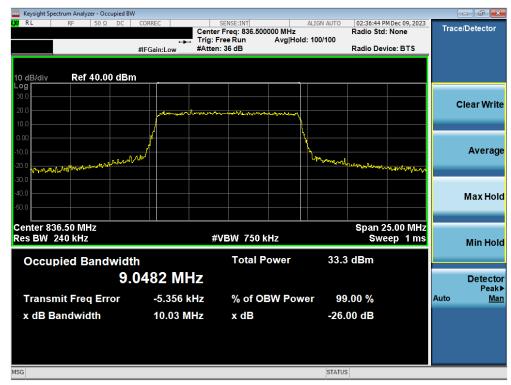

Plot 7-13. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB Configuration)



Plot 7-14. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 21 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 21 01 109





Plot 7-15. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 64-QAM - Full RB Configuration)



Plot 7-16. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 22 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 22 01 109



ULCA - LTE Band 5



Plot 7-17. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK - Full RB Configuration)



Plot 7-18. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 23 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 23 01 109





Plot 7-19. Conducted Spurious Plot (ULCA LTE Band - (10 + 10)MHz 64-QAM - Full RB Configuration)



Plot 7-20. Conducted Spurious Plot (ULCA LTE Band - (10 + 10)MHz 256-QAM - Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 24 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 24 01 109



NR Band n26/n5



Plot 7-21. Occupied Bandwidth Plot (NR Band n26 - 5MHz n5 DFT-s-OFDM π/2 BPSK - Full RB Configuration)

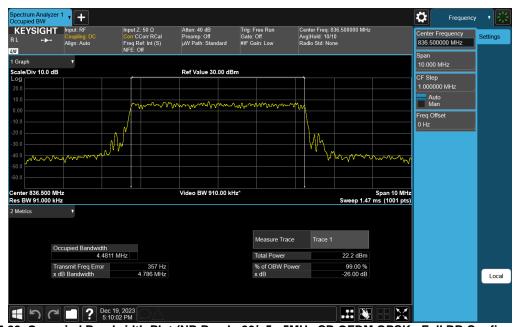

Plot 7-22. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz CP-OFDM QPSK - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 25 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 25 01 109






Plot 7-23. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz CP-OFDM 16-QAM - Full RB Configuration)




Plot 7-24. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz CP-OFDM 64-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 26 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 20 01 109



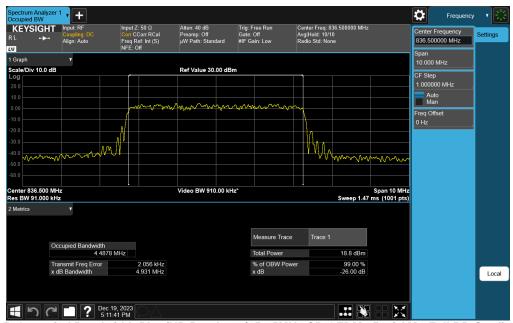


Plot 7-25. Occupied Bandwidth Plot (NR Band n26/n5 - 5MHz CP-OFDM 256-QAM - Full RB Configuration)

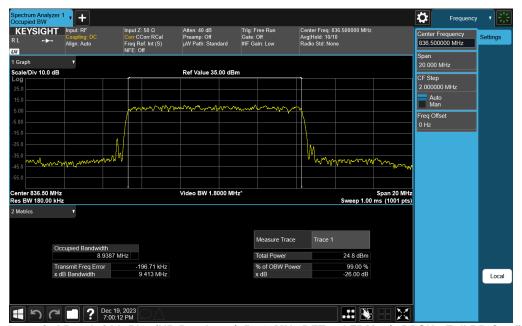

Plot 7-26. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz DFT-s-OFDM π/2 BPSK - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 27 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 21 01 109



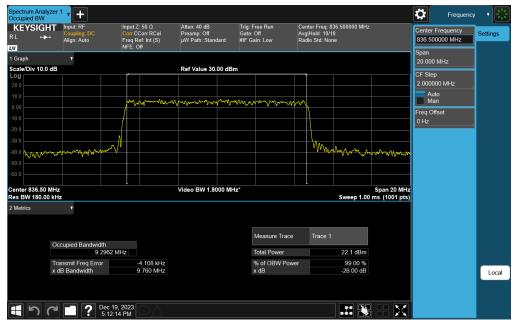


Plot 7-27. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz CP-OFDM QPSK - Full RB Configuration)



Plot 7-28. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz CP-OFDM 16-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 28 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 28 01 109



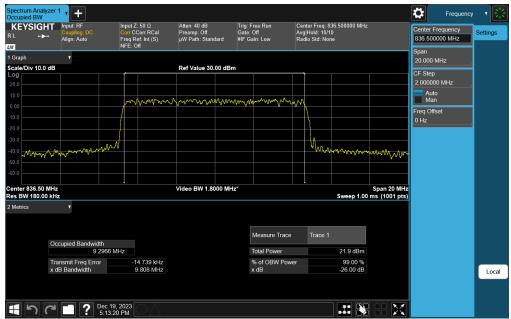


Plot 7-29. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz CP-OFDM 64-QAM - Full RB Configuration)




Plot 7-30. Occupied Bandwidth Plot (NR Band n26/n5 - 10MHz CP-OFDM 256-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 29 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	



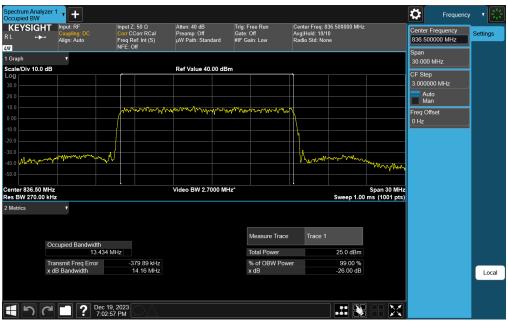

Plot 7-31. Occupied Bandwidth Plot (NR Band n26/n5 - 15MHz DFT-s-OFDM π/2 BPSK - Full RB Configuration)

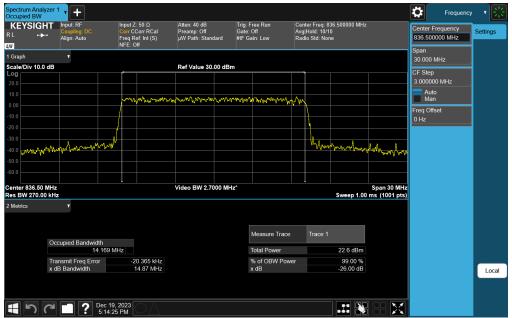


Plot 7-32. Occupied Bandwidth Plot (NR Band n26/n5 - 15MHz CP-OFDM QPSK - Full RB Configuration)

FCC ID: BCGA2903	element	element Part 22 Measurement report	
Test Report S/N:	Test Dates:	EUT Type:	Page 30 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 30 of 109






Plot 7-33. Occupied Bandwidth Plot (NR Band n26/n5 - 15MHz CP-OFDM 16-QAM - Full RB Configuration)

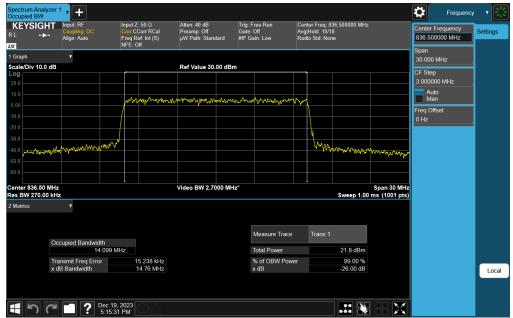

Plot 7-34. Occupied Bandwidth Plot (NR Band n26/n5 - 15MHz CP-OFDM 64-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 31 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 31 of 109



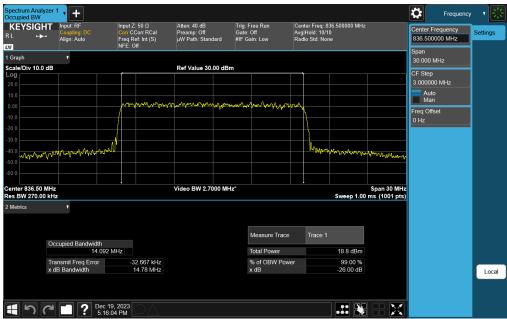


Plot 7-35. Occupied Bandwidth Plot (NR Band n26/n5 - 15MHz CP-OFDM 256-QAM - Full RB Configuration)



Plot 7-36. Occupied Bandwidth Plot (NR Band n26/n5 - 20MHz DFT-s-OFDM π/2 BPSK - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 32 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 32 01 109



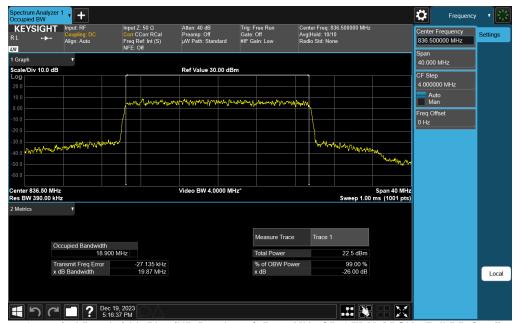


Plot 7-37. Occupied Bandwidth Plot (NR Band n26/n5 - 20MHz CP-OFDM QPSK - Full RB Configuration)




Plot 7-38. Occupied Bandwidth Plot (NR Band n26/n5 - 20MHz CP-OFDM 16-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 33 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 33 of 109



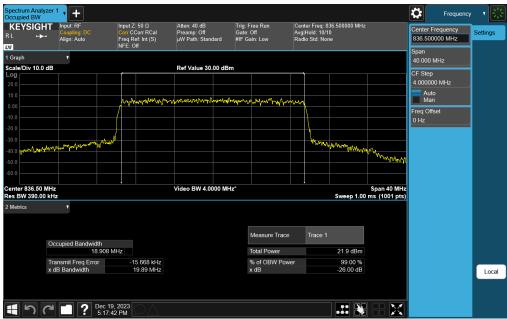

Plot 7-39. Occupied Bandwidth Plot (NR Band n26/n5 - 20MHz CP-OFDM 64-QAM - Full RB Configuration)

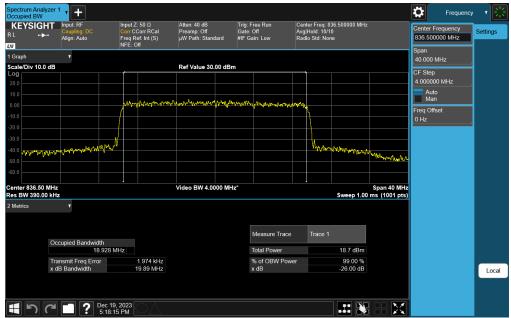

Plot 7-40. Occupied Bandwidth Plot (NR Band n26/n5 - 20MHz CP-OFDM 256-QAM - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 34 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 34 01 109



WCDMA Cell



Plot 7-41. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 35 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 35 01 109



7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051, 22.917(a)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

The minimum permissible attenuation level of any spurious emission is 43 + 10 $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 6.0

Test Settings

- 1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

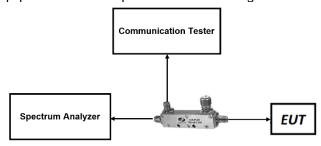


Figure 7-2. Test Instrument & Measurement Setup

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 36 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 30 01 109




Test Notes

- 1. Per Part 22, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- 2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- Uplink carrier aggregation conducted spurious emissions measurements were evaluated for the two
 contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
 The worst case (highest) powers were found while operating with QPSK modulation with both carriers set
 to transmit using 1RB.
- 4. Uplink carrier aggregation inter-band emission was investigated and found to not be the worst case


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 37 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 37 01 109



LTE Band 26/5

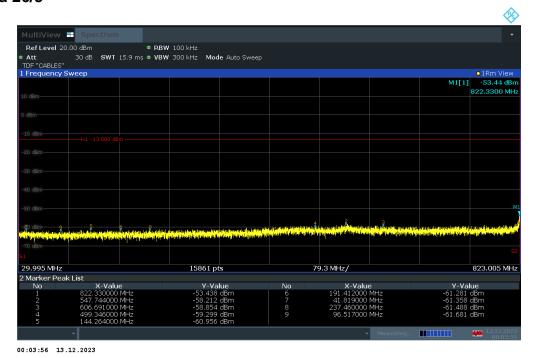


Plot 7-42. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

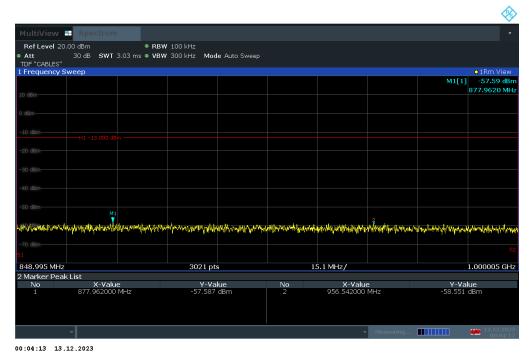


Plot 7-43. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 29 of 100
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 38 of 109



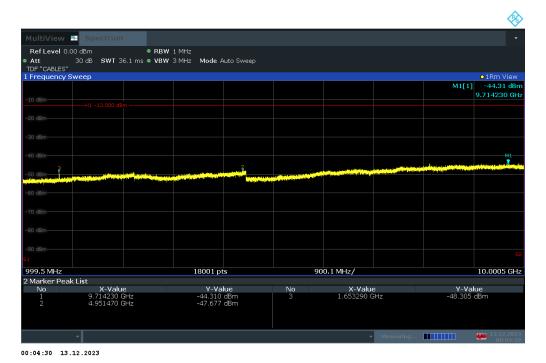


Plot 7-44. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

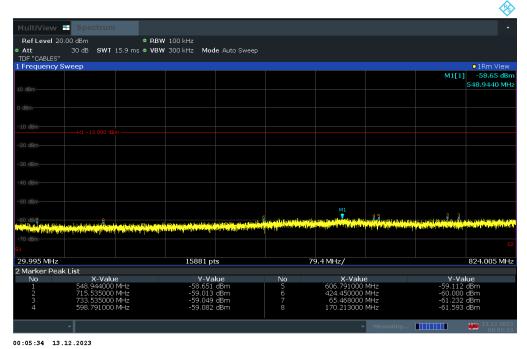


Plot 7-45. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 39 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 39 01 109



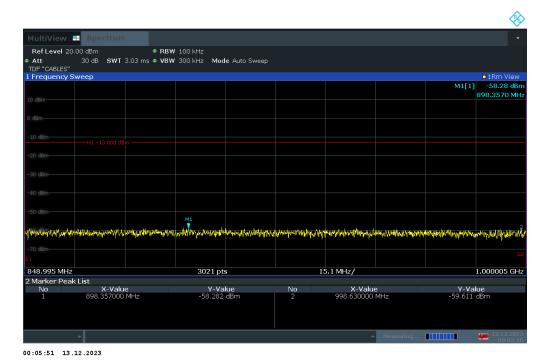


Plot 7-46. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

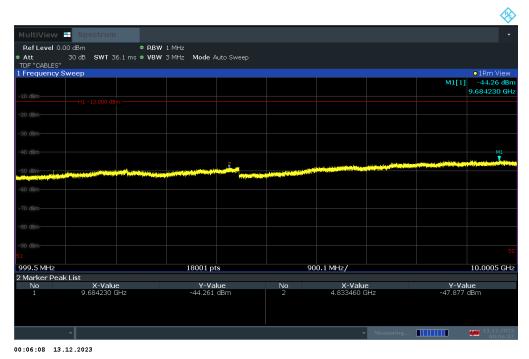


Plot 7-47. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 40 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 40 01 109



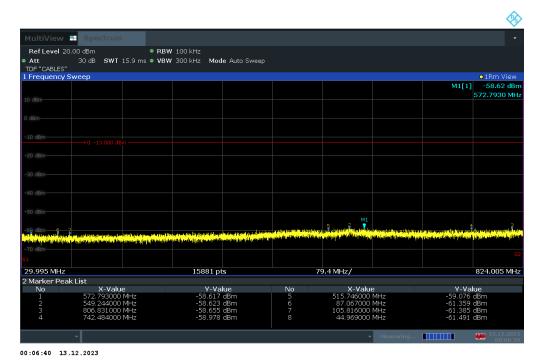


Plot 7-48. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

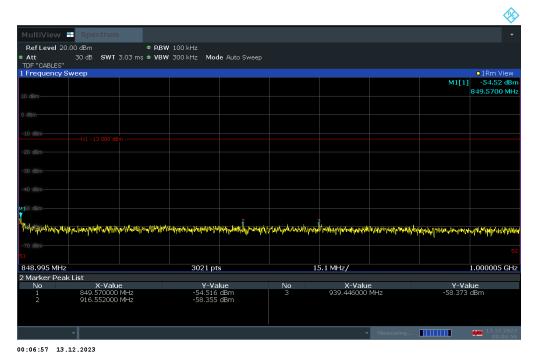

Plot 7-49. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 41 of 100
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 41 of 109



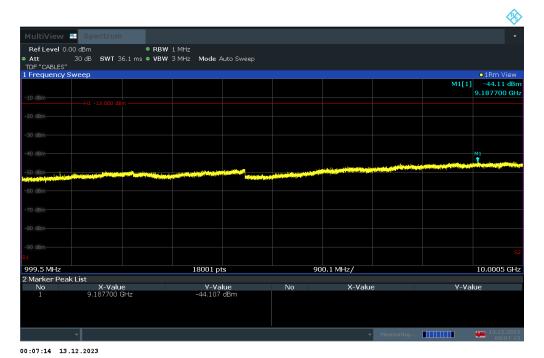


Plot 7-50. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 42 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 42 01 109



ULCA LTE Band 5

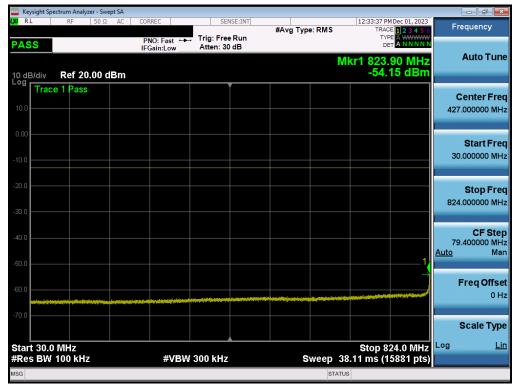

Plot 7-51. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz QPSK - PCC 1/49 SCC 1/0 - Low Channel)

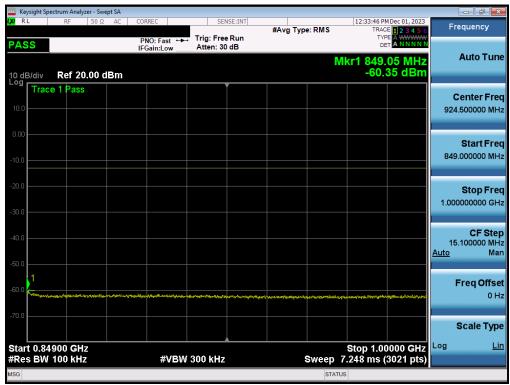

Plot 7-52. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz QPSK - PCC 1/49 SCC 1/0 - Low Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 43 of 100
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 43 of 109






Plot 7-53. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz QPSK - PCC 1/49 SCC 1/0 - Low Channel)




Plot 7-54. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz QPSK - PCC 1/49 SCC 1/0 - Mid Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 44 of 100
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 44 of 109



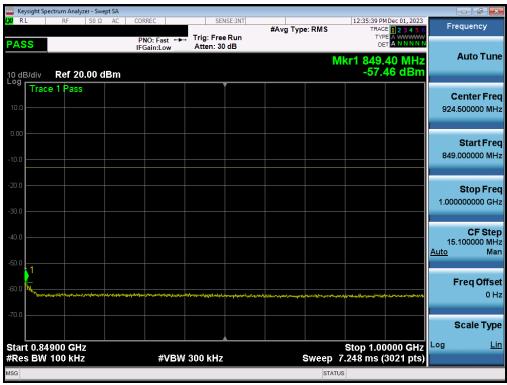


Plot 7-55. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz QPSK - PCC 1/49 SCC 1/0 - Mid Channel)

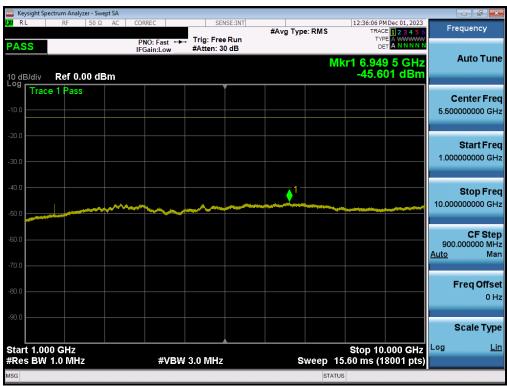


Plot 7-56. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz QPSK - PCC 1/49 SCC 1/0 - Mid Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 45 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 45 01 109



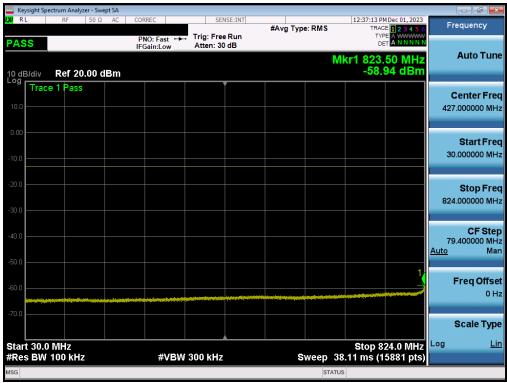

Plot 7-57. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz QPSK - PCC 1/0 SCC 1/49 - High Channel)

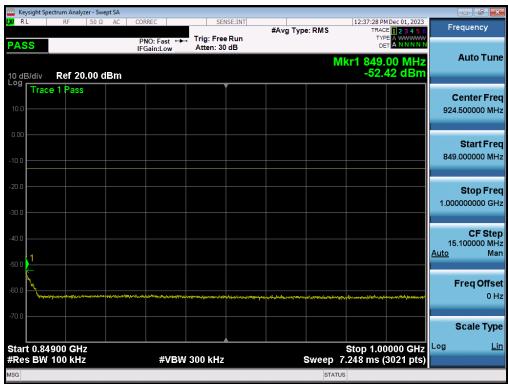

Plot 7-58. Conducted Spurious Plot (ULCA LTE Band 5 - (10 + 10)MHz QPSK - PCC 1/0 SCC 1/49 - High Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 46 of 100
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 46 of 109






Plot 7-59. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/0 SCC 1/49 - High Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dog 47 of 100
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 47 of 109



NR Band n26/n5

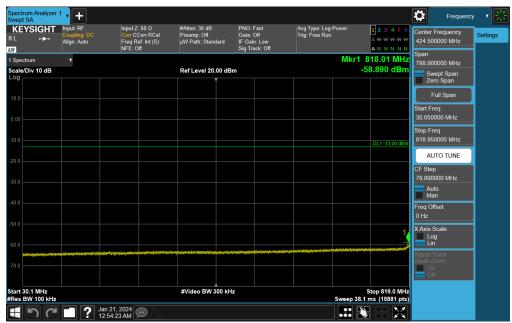

Plot 7-60. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)



Plot 7-61. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 48 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 40 01 109





Plot 7-62. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)



Plot 7-63. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 49 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	





Plot 7-64. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)




Plot 7-65. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 50 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	





Plot 7-66. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

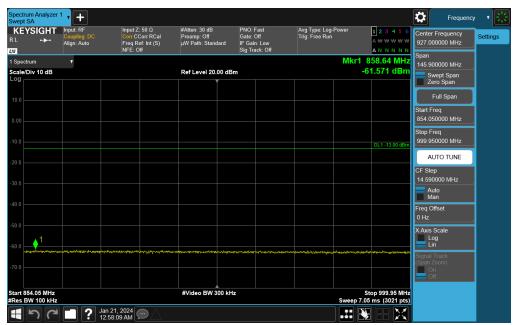

Plot 7-67. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 51 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	





Plot 7-68. Conducted Spurious Plot (NR Band n26/n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 52 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 32 01 109



WCDMA Cell




Plot 7-69. Conducted Spurious Plot (WCDMA Ch. 4132)

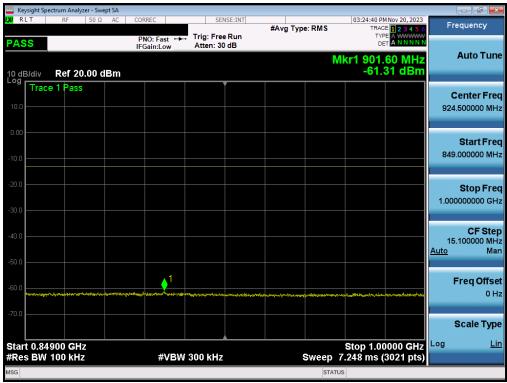

Plot 7-70. Conducted Spurious Plot (WCDMA Ch. 4132)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 53 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 33 01 109



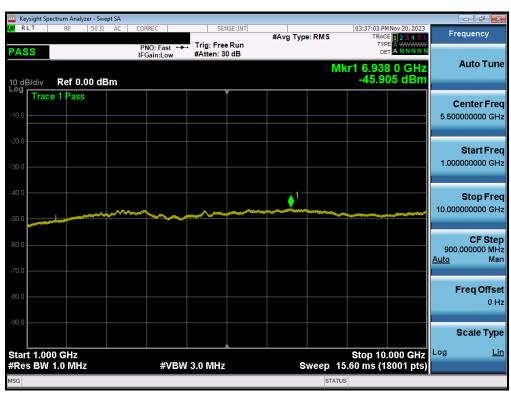


Plot 7-71. Conducted Spurious Plot (WCDMA Ch. 4132)



Plot 7-72. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 54 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Faye 34 01 109



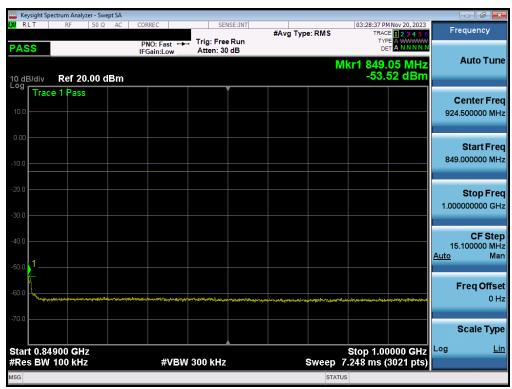


Plot 7-73. Conducted Spurious Plot (WCDMA Ch. 4183)




Plot 7-74. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 55 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 33 01 109



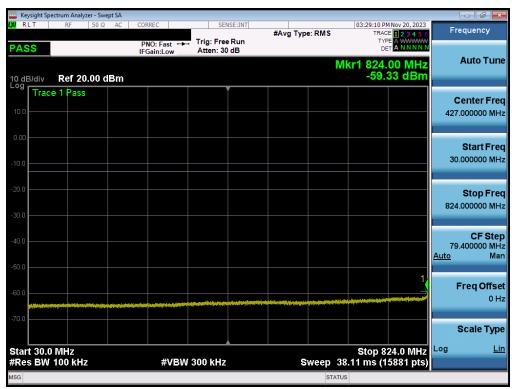

Plot 7-75. Conducted Spurious Plot (WCDMA Ch. 4233)

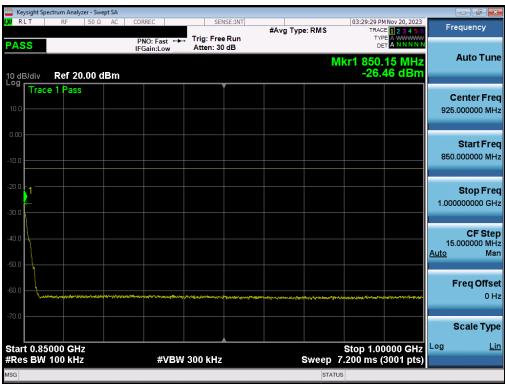

Plot 7-76. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 56 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 30 01 109





Plot 7-77. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by:
	elemen		Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 57 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 57 01 109



7.4 Band Edge Emissions at Antenna Terminal §2.1051, 22.917(a)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data was reported.

The minimum permissible attenuation level of any spurious emission is 43 + 10 $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 6.0

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW \geq 1% of the emission bandwidth
- 4. $VBW \ge 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

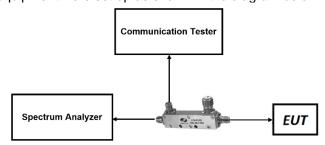


Figure 7-3. Test Instrument & Measurement Setup

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 58 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	




Test Notes

- 1. Per 22.917(b), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 59 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 39 01 109



LTE Band 26

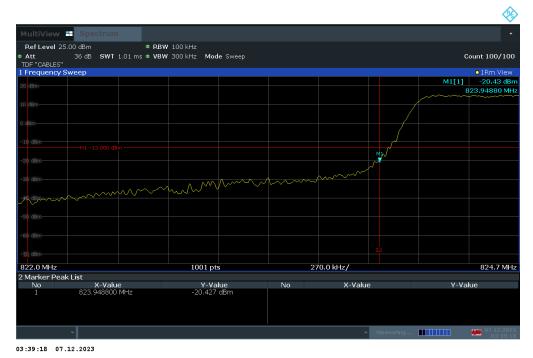


Plot 7-78. Lower BE Plot (LTE Band 26 - 1.4MHz QPSK - Full RB Configuration)



Plot 7-79. Upper BE Plot (LTE Band 26 – 1.4MHz QPSK – Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 60 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 00 01 109



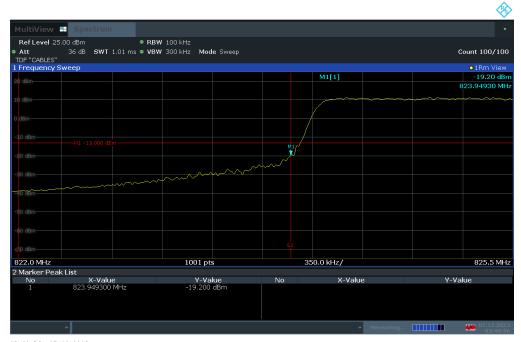

03:40:56 07.12.2023


Plot 7-80. Lower BE Plot (LTE Band 26 - 3MHz QPSK - Full RB Configuration)

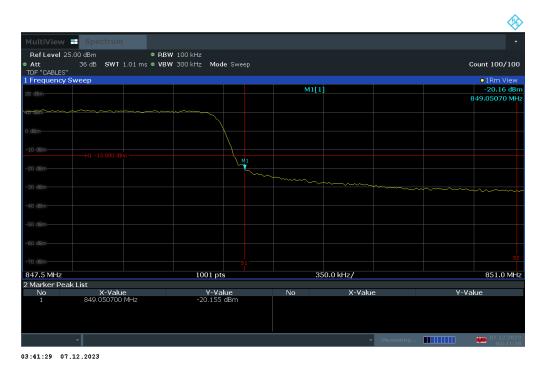

Plot 7-81. Upper BE Plot (LTE Band 26 - 3MHz QPSK - Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 61 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 01 01 109



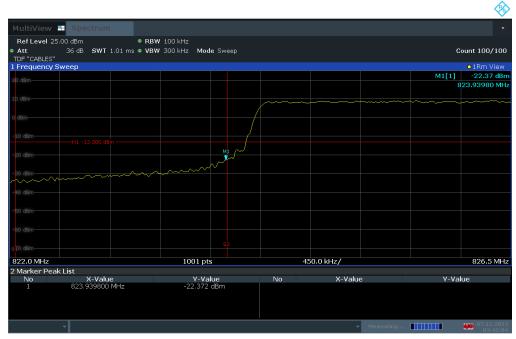

03:42:04 07.12.2023


Plot 7-82. Lower BE Plot (LTE Band 26 - 5MHz QPSK - Full RB Configuration)

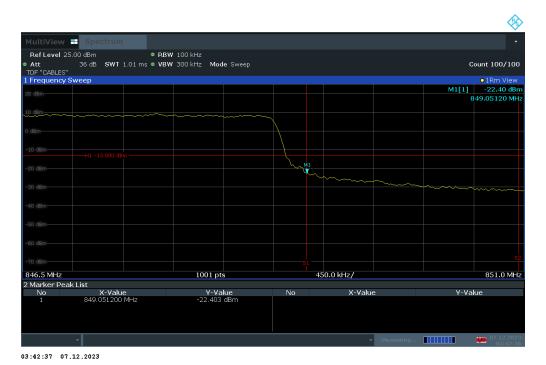

Plot 7-83. Upper BE Plot (LTE Band 26 - 5MHz QPSK - Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 62 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 62 01 109



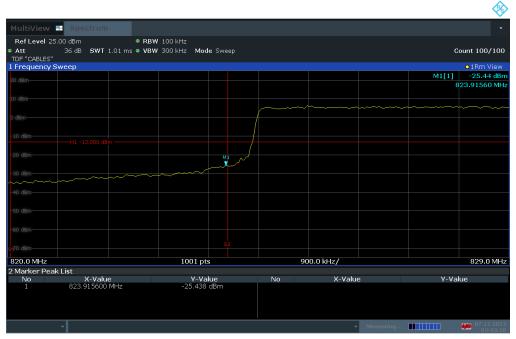

03:43:10 07.12.2023

Plot 7-84. Lower BE Plot (LTE Band 26 - 10MHz QPSK - Full RB Configuration)

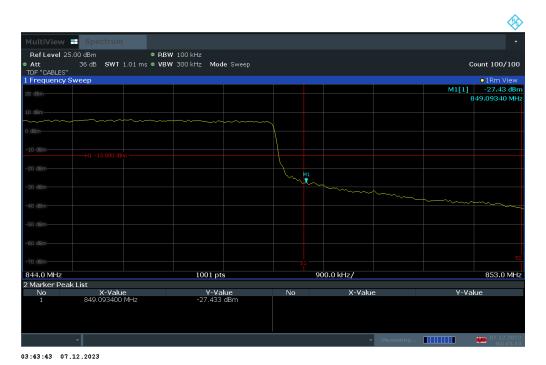


Plot 7-85. Upper BE Plot (LTE Band 26 - 10MHz QPSK - Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 63 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 63 01 109



LTE Band 5

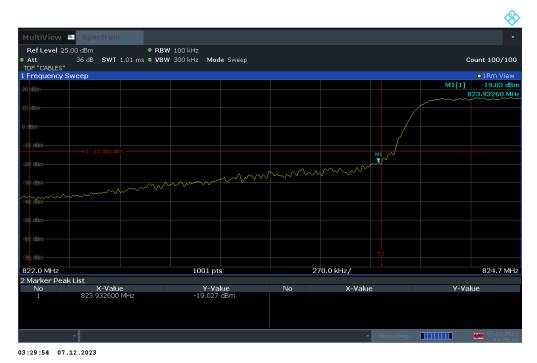


Plot 7-86. Lower BE Plot (LTE Band 5 – 1.4MHz QPSK – Full RB Configuration)

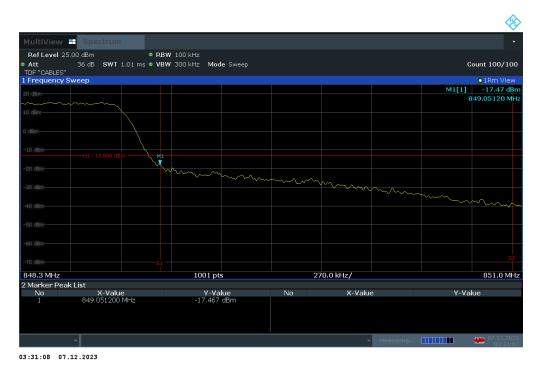

Plot 7-87. Upper BE Plot (LTE Band 5 – 1.4MHz QPSK – Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 64 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 64 01 109



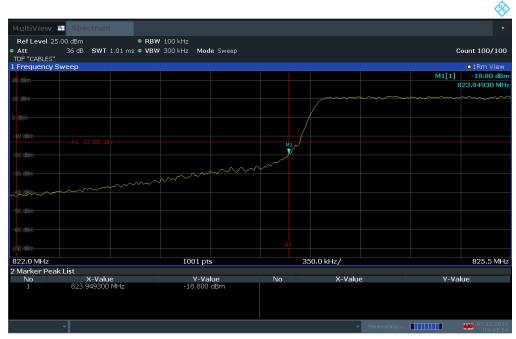

03:31:54 07.12.2023


Plot 7-88. Lower BE Plot (LTE Band 5 - 3MHz QPSK - Full RB Configuration)

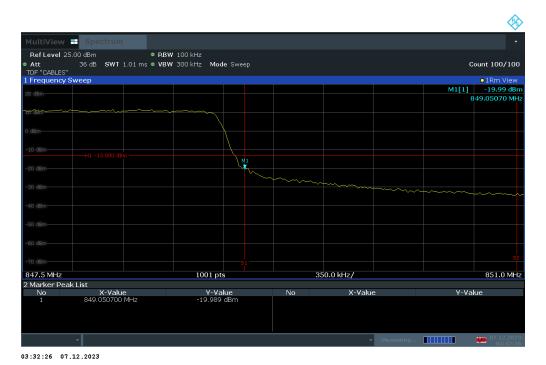

Plot 7-89. Upper BE Plot (LTE Band 5 - 3MHz QPSK - Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 65 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 05 01 109



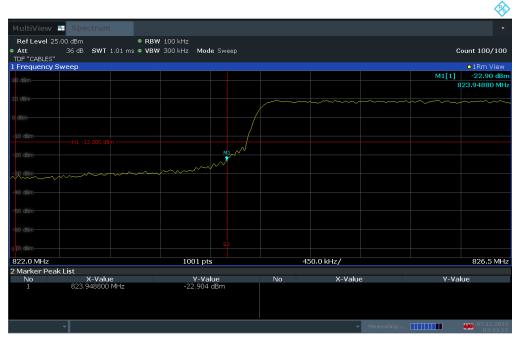

03:33:12 07.12.2023


Plot 7-90. Lower BE Plot (LTE Band 5 - 5MHz QPSK - Full RB Configuration)

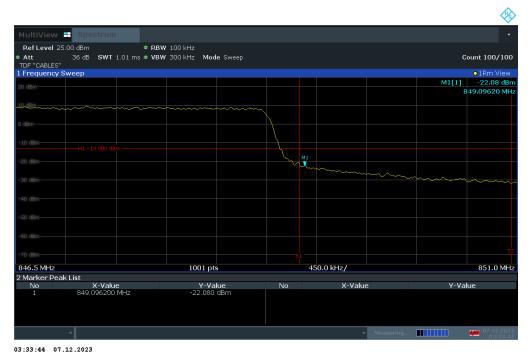

Plot 7-91. Upper BE Plot (LTE Band 5 - 5MHz QPSK - Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 66 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 00 01 109



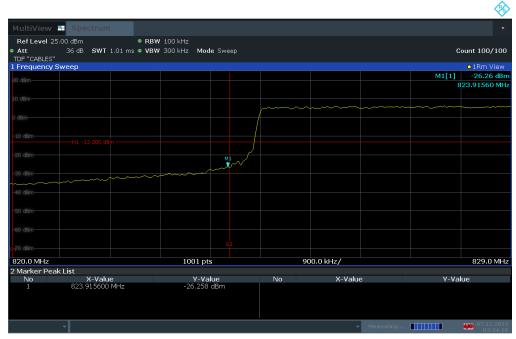

03:34:18 07.12.2023

Plot 7-92. Lower BE Plot (LTE Band 5 - 10MHz QPSK - Full RB Configuration)

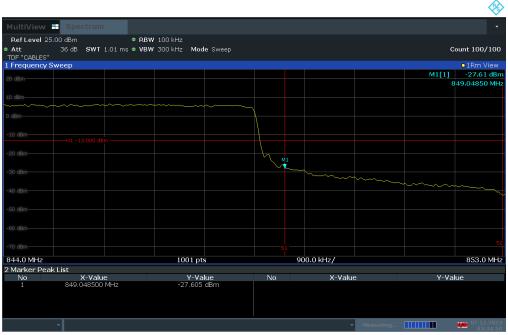

03:34:51 07.12.2023

Plot 7-93. Upper BE Plot (LTE Band 5 - 10MHz QPSK - Full RB Configuration)


FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 67 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 07 01 109



ULCA - LTE Band 5



Plot 7-94. Lower BE Plot (ULCA - LTE Band 5 - (10 + 10)MHz QPSK - Full RB Configuration)

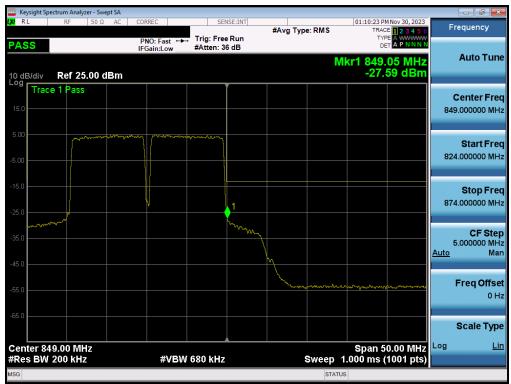


Plot 7-95. Upper BE Plot (ULCA - LTE Band 5 - (10 + 10)MHz QPSK - Full RB Configuration)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 68 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	rage oo or 109
			1/0 0 00/0 //0000



NR Band n26

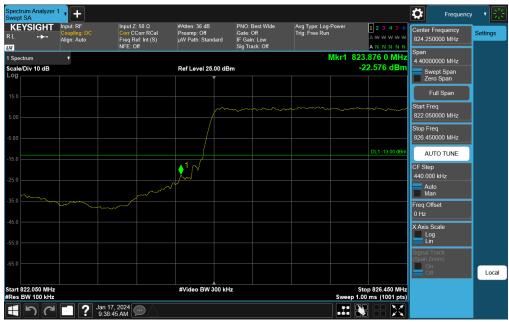

Plot 7-96. Lower BE Plot (NR Band n26 DFT-s-OFDM QPSK - 5.0MHz - Full RB)



Plot 7-97. Upper BE Plot (NR Band n26 DFT-s-OFDM QPSK - 5.0MHz - Full RB)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 69 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 03 01 109





Plot 7-98. Lower BE Plot (NR Band n26 DFT-s-OFDM QPSK - 10.0MHz - Full RB)




Plot 7-99. Upper BE Plot (NR Band n26 DFT-s-OFDM QPSK - 10.0MHz - Full RB)

FCC ID: BCGA2903	element	element Part 22 Measurement Report	
Test Report S/N:	Test Dates:	EUT Type:	Page 70 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Page 70 of 109






Plot 7-100. Lower BE Plot (NR Band n26 DFT-s-OFDM QPSK - 15.0MHz - Full RB)

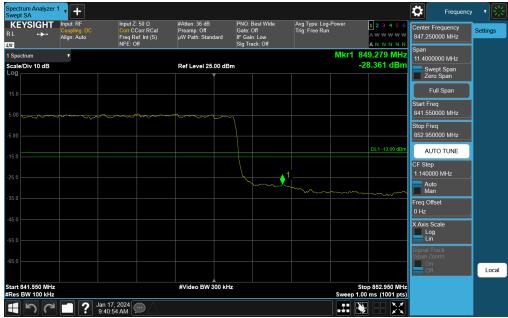


Plot 7-101. Upper BE Plot (NR Band n26 DFT-s-OFDM QPSK - 15.0MHz - Full RB)

FCC ID: BCGA2903	element	element Part 22 Measurement Report	
Test Report S/N:	Test Dates:	EUT Type:	Page 71 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	rage / 1 01 109



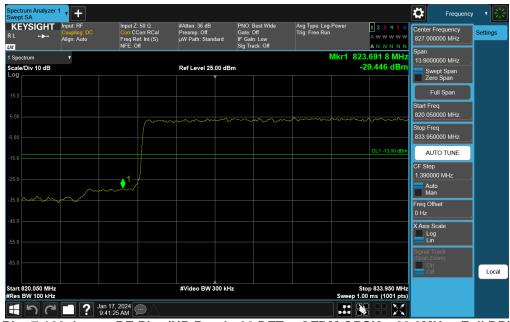

Plot 7-102. Lower BE Plot (NR Band n26 DFT-s-OFDM QPSK - 20.0MHz - Full RB)

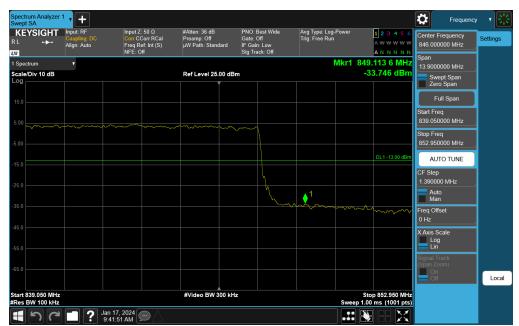

Plot 7-103. Upper BE Plot (NR Band n26 DFT-s-OFDM QPSK - 20.0MHz - Full RB)


FCC ID: BCGA2903	A element	element Part 22 Measurement Report	
FCC ID. BCGA2903	Cicilicii		
Test Report S/N:	Test Dates:	EUT Type:	Page 72 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 72 01 109



NR Band n5



Plot 7-104. Lower BE Plot (NR Band n5 DFT-s-OFDM QPSK - 5.0MHz - Full RB)

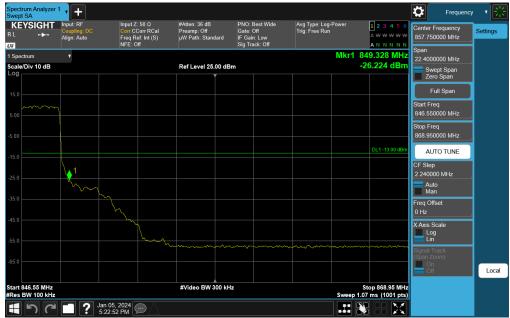

Plot 7-105. Upper BE Plot (NR Band n5 DFT-s-OFDM QPSK - 5.0MHz - Full RB)

FCC ID: BCGA2903	element	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 73 of 109
1C2311270064-07.BCG	10/1/2023 - 3/21/2024	Tablet Device	Fage 73 01 109