

Trace/Detector: AVG/RMS RBW/VBW: 0.22MHz/2.20MHz Sweep Time: 1.0ms

(160MHz 802.11ax (UNII Band 5) - Ch. 47, MCS4)


Plot 7-1271. SP In-Band Emission Plot SDM Diversity Antenna 3c Plot 7-1274. SP In-Band Emission Plot SDM Diversity Antenna 3a (20MHz 802.11ax (UNII Band 7) - Ch. 149, MCS4)





Plot 7-1272. SP In-Band Emission Plot SDM Diversity Antenna 3a Plot 7-1275. SP In-Band Emission Plot SDM Diversity Antenna 3c (160MHz 802.11ax (UNII Band 5) - Ch. 47, MCS4)

(40MHz 802.11ax (UNII Band 7) - Ch. 155, MCS4)







(20MHz 802.11ax (UNII Band 7) - Ch. 149, MCS4)

Plot 7-1273. SP In-Band Emission Plot SDM Diversity Antenna 3c Plot 7-1276. SP In-Band Emission Plot SDM Diversity Antenna 3a (40MHz 802.11ax (UNII Band 7) - Ch. 155, MCS4)

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 227 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 337 of 523








Plot 7-1277. SP In-Band Emission Plot SDM Diversity Antenna 3c (80MHz 802.11ax (UNII Band 7) - Ch. 151, MCS4)

Plot 7-1279. SP In-Band Emission Plot SDM Diversity Antenna 3c (160MHz 802.11ax (UNII Band 7) - Ch. 143, MCS4)






Plot 7-1278. SP In-Band Emission Plot SDM Diversity Antenna 3a Plot 7-1280. SP In-Band Emission Plot SDM Diversity Antenna 3a (80MHz 802.11ax (UNII Band 7) - Ch. 151, MCS4)


(160MHz 802.11ax (UNII Band 7) - Ch. 143, MCS4)

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 338 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 338 01 523




High Data Rate






Plot 7-1281. SP In-Band Emission Plot SDM Diversity Antenna 3c (20MHz 802.11ax (UNII Band 5) - Ch. 45, MCS11)

Plot 7-1284. SP In-Band Emission Plot SDM Diversity Antenna 3a (40MHz 802.11ax (UNII Band 5) - Ch. 43, MCS11)





Plot 7-1282. SP In-Band Emission Plot SDM Diversity Antenna 3a (20MHz 802.11ax (UNII Band 5) - Ch. 45, MCS11)

Plot 7-1285. SP In-Band Emission Plot SDM Diversity Antenna 3c (80MHz 802.11ax (UNII Band 5) - Ch. 39, MCS11)





(40MHz 802.11ax (UNII Band 5) - Ch. 43, MCS11)

Plot 7-1283. SP In-Band Emission Plot SDM Diversity Antenna 3c Plot 7-1286. SP In-Band Emission Plot SDM Diversity Antenna 3a (80MHz 802.11ax (UNII Band 5) - Ch. 39, MCS11)

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 220 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 339 of 523






Trace/Detector: AVG/RMS RBW/VBW: 0.22MHz/2.20MHz Sweep Time: 1.0ms

(160MHz 802.11ax (UNII Band 5) - Ch. 47, MCS11)


Plot 7-1287. SP In-Band Emission Plot SDM Diversity Antenna 3c Plot 7-1290. SP In-Band Emission Plot SDM Diversity Antenna 3a (20MHz 802.11ax (UNII Band 7) - Ch. 149, MCS11)





(160MHz 802.11ax (UNII Band 5) - Ch. 47, MCS11)

Plot 7-1288. SP In-Band Emission Plot SDM Diversity Antenna 3a Plot 7-1291. SP In-Band Emission Plot SDM Diversity Antenna 3c (40MHz 802.11ax (UNII Band 7) - Ch. 155, MCS11)






(20MHz 802.11ax (UNII Band 7) - Ch. 149, MCS11)

Plot 7-1289. SP In-Band Emission Plot SDM Diversity Antenna 3c Plot 7-1292. SP In-Band Emission Plot SDM Diversity Antenna 3a (40MHz 802.11ax (UNII Band 7) - Ch. 155, MCS11)

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 340 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 340 01 523








Plot 7-1293. SP In-Band Emission Plot SDM Diversity Antenna 3c (80MHz 802.11ax (UNII Band 7) - Ch. 151, MCS11)

Plot 7-1295. SP In-Band Emission Plot SDM Diversity Antenna 3c (160MHz 802.11ax (UNII Band 7) - Ch. 143, MCS11)





(80MHz 802.11ax (UNII Band 7) - Ch. 151, MCS11)

Plot 7-1294. SP In-Band Emission Plot SDM Diversity Antenna 3a Plot 7-1296. SP In-Band Emission Plot SDM Diversity Antenna 3a (160MHz 802.11ax (UNII Band 7) - Ch. 143, MCS11)

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 241 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 341 of 523



7.6 Contention Based Protocol – 802.11a/ax(SU) §15.407(d)(6), RSS-248 [4.8]

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2 KDB 987594 D02 v02r01

Test Settings

- 1. Configure the EUT to transmit with a constant duty cycle.
- 2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
- 3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
- 4. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- 5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
- 6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- 7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
- 8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- 9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- 10. Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- 11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 342 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 342 01 523



Test Setup




Figure 7-5. Contention-based protocol test setup, conducted method

Test Notes

- 1. The EUT does not support channel puncturing.
- Per guidance from KDB 987594 D02 v02r01, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz. The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.
- 3. Per KDB 987594 D04 v02, contention-based protocol was tested with receiver with the lowest antenna gain.
- 4. 15 trials were ran in order to assure that at least 90% of certainty was met.

Detection Level = Injected AWGN Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)

Equation 7-1. Incumbent Detection Level Calculation

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 242 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 343 of 523



Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
	53	6215	20	6215	-69.00	-3.20	-68.40	-62.00	-6.40
UNII				6110	-65.11	-3.20	-64.51	-62.00	-2.51
Band 5	47	6185	160	6185	-67.09	-3.20	-66.49	-62.00	-4.49
				6260	-64.10	-3.20	-63.50	-62.00	-1.50
	101	6455	20	6455	-65.00	-3.20	-64.40	-62.00	-2.40
UNII				6430	-63.78	-3.20	-63.18	-62.00	-1.18
Band 6	111	6505	160	6505	-63.98	-3.20	-63.38	-62.00	-1.38
				6580	-64.20	-3.20	-63.60	-62.00	-1.60
	149	6695	20	6695	-66.00	-3.20	-65.40	-62.00	-3.40
UNII				6590	-64.23	-3.20	-63.63	-62.00	-1.63
Band 7	143	6665	160	6665	-64.50	-3.20	-63.90	-62.00	-1.90
				6740	-63.97	-3.20	-63.37	-62.00	-1.37
	197	6935	20	6935	-65.00	-3.20	-64.40	-62.00	-2.40
UNII				6910	-63.89	-3.20	-63.29	-62.00	-1.29
Band 8	207	6985	160	6985	-63.81	-3.20	-63.21	-62.00	-1.21
				7060	-64.07	-3.20	-63.47	-62.00	-1.47

Table 7-161. Contention Based Protocol – Incumbent Detection Results

					EUT Transmission Status			
		Channel	Channal DW	Incumbent	Adjuste	er (dBm)		
Band	Channel	Frquency [MHz]	Channel BW [MHz]	Frequency [MHz]	Normal	Minimal	Ceased	
	53	6215	20	6215	-81.39	-71.37	-68.40	
UNII				6110	-76.39	-65.57	-64.51	
Band 5	47	6185	160	6185	-81.14	-69.48	-66.49	
				6260	-75.12	-65.10	-63.50	
	101	6455	20	6455	-78.70	-66.88	-64.40	
UNII				6430	-75.67	-65.43	-63.18	
Band 6	111	6505	160	160	6505	-75.60	-64.99	-63.38
				6580	-76.76	-65.89	-63.60	
	149	6695	20	6695	-78.44	-67.32	-65.40	
UNII				6590	-76.33	-65.96	-63.63	
Band 7	143	6665	160	6665	-76.10	-65.50	-63.90	
				6740	-76.43	-66.21	-63.37	
	197	6935	20	6935	-77.57	-65.76	-64.40	
UNII				6910	-76.10	-65.44	-63.29	
Band 8	207	6985	160	6985	-76.32	-65.52	-63.21	
				7060	-77.29	-66.35	-63.47	

Table 7-162. Contention Based Protocol – Detection Results – All Tx Cases

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 344 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 344 01 523




									CBP Detec	tion (1 = Deter	ction, Blank = N	lo Detection)									
Band	Channel	Channel Frquency [MHz]	Channel BW [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate [%]	Limit [%]	Pass/Fail
	53	6215	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
UNII				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
Band 5	47	6185	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
	101	6455	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
UNII				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
Band 6	111	6505	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
	149	6695	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
UNII			l 1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
Band 7	143	6665	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
	197	6935	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
UNII				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
Band 8	207	6985	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass

Table 7-163. Contention Based Protocol - Incumbent Detection Trial Results


FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 245 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 345 of 523



AWGN Plots

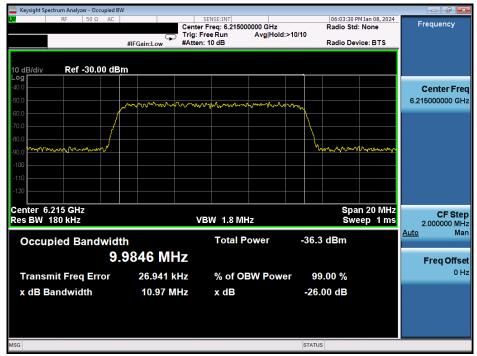

Plot 7-1297. AWGN Signal - UNII 5 - 20MHz

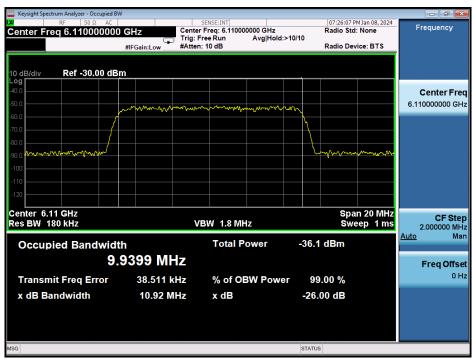

Plot 7-1298. AWGN Signal - UNII 5 - 160MHz - Low

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 246 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 346 of 523






Plot 7-1299. AWGN Signal - UNII 5 - 160MHz - Mid



Plot 7-1300. AWGN Signal - UNII 5 - 160MHz - High

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 247 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 347 of 523



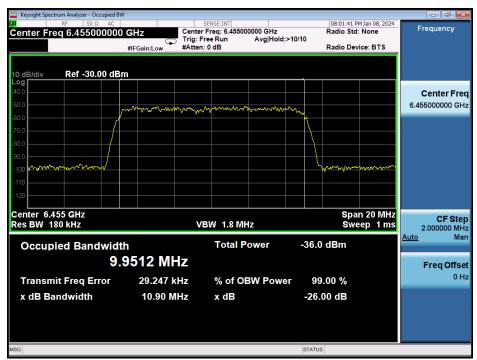


Plot 7-1301. AWGN Signal - UNII 6 - 20MHz



Plot 7-1302. AWGN Signal - UNII 6 - 160MHz - Low

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 348 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 348 01 523



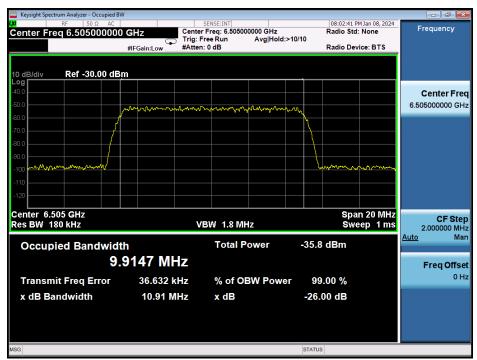


Plot 7-1303. AWGN Signal - UNII 6 - 160MHz - Mid



Plot 7-1304. AWGN Signal - UNII 6 - 160MHz - High

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 349 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 349 01 523



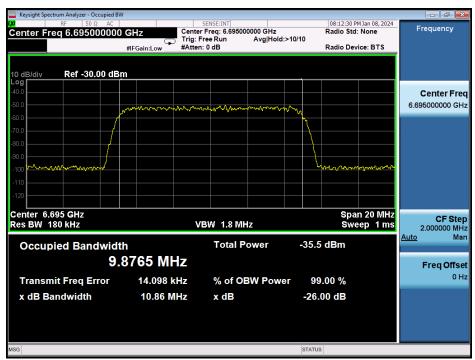


Plot 7-1305. AWGN Signal - UNII 7 - 20MHz



Plot 7-1306. AWGN Signal - UNII 7 - 160MHz - Low

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 350 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 350 01 523



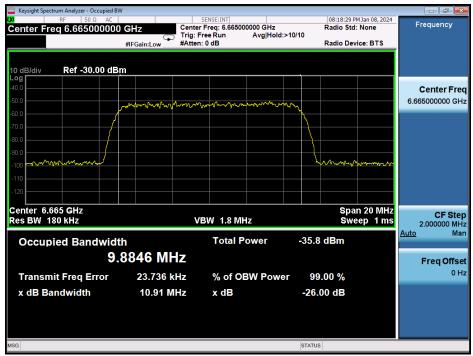


Plot 7-1307. AWGN Signal - UNII 7 - 160MHz - Mid



Plot 7-1308. AWGN Signal - UNII 7 - 160MHz - High

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 251 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 351 of 523



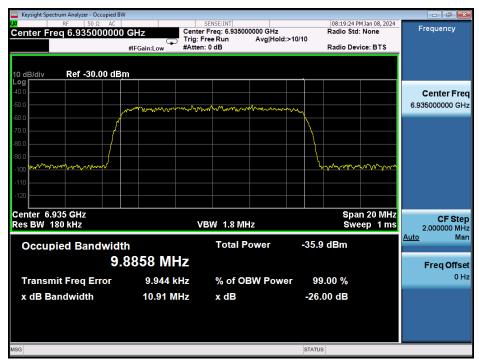

Plot 7-1309. AWGN Signal - UNII 8 - 20MHz



Plot 7-1310. AWGN Signal - UNII 8 - 160MHz - Low

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 352 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 352 01 523





Plot 7-1311. AWGN Signal - UNII 8 - 160MHz - Mid



Plot 7-1312. AWGN Signal - UNII 8 - 160MHz - High


FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 353 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 353 01 523



Contention-Based Protocol Timing Plots



Plot 7-1313. Contention Based Protocol Timing Plot – UNII 5 – 20MHz Channel 53

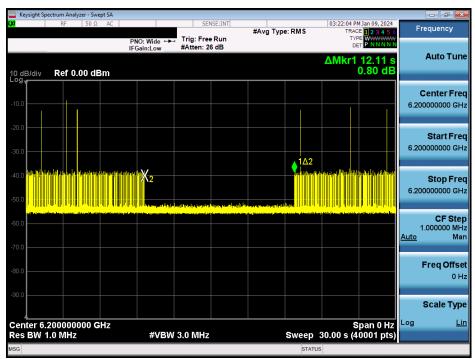


Plot 7-1314. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – Low

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 354 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 354 01 523






Plot 7-1315. Contention Based Protocol Timing Plot - UNII 5 - 160MHz Channel 47 - Mid

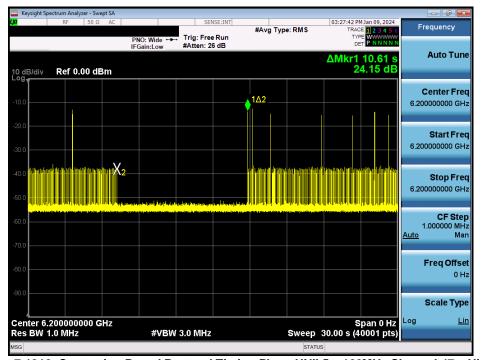


Plot 7-1316. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – High

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 255 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 355 of 523



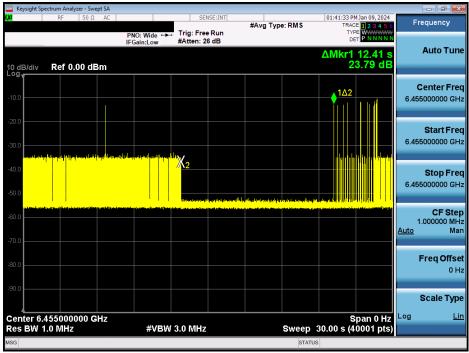


Plot 7-1317. Contention Based Protocol Timing Plot - UNII 6 - 20MHz Channel 101

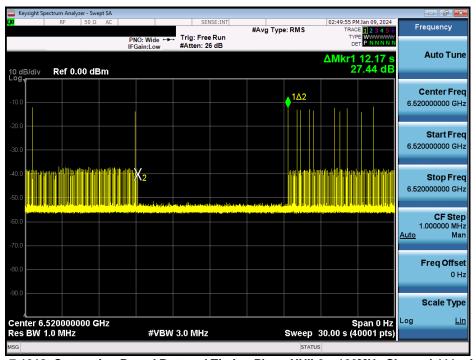


Plot 7-1318. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Low

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 256 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 356 of 523



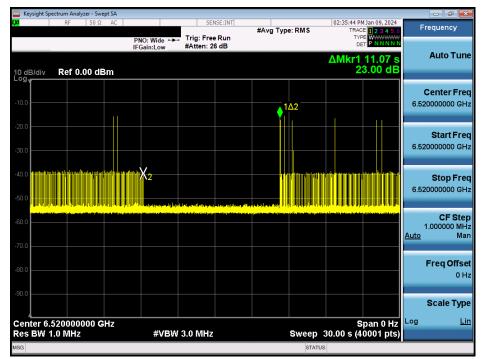


Plot 7-1319. Contention Based Protocol Timing Plot - UNII 6 - 160MHz Channel 111 - Mid

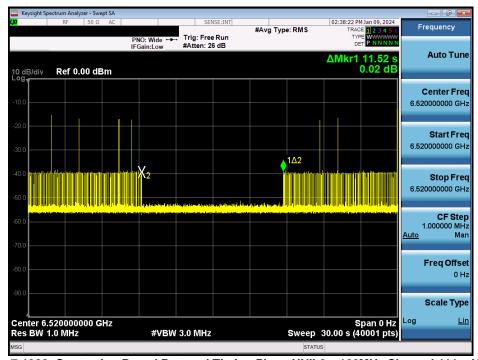


Plot 7-1320. Contention Based Protocol Timing Plot - UNII 6 - 160MHz Channel 111 - High

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 357 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 357 01 523



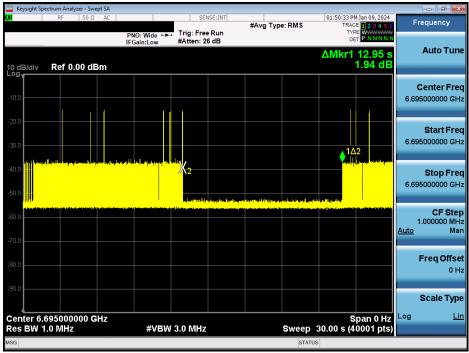


Plot 7-1321. Contention Based Protocol Timing Plot - UNII 7 - 20MHz Channel 149

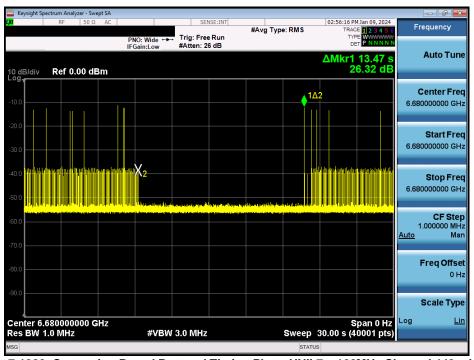


Plot 7-1322. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Low

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 358 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 358 01 523



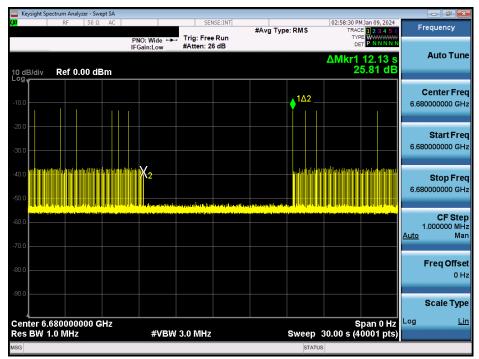


Plot 7-1323. Contention Based Protocol Timing Plot - UNII 7 - 160MHz Channel 143 - Mid

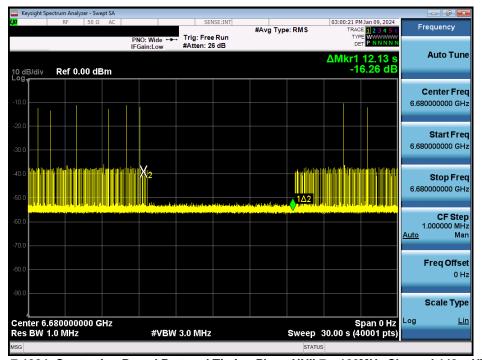


Plot 7-1324. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – High

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 359 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 359 01 523



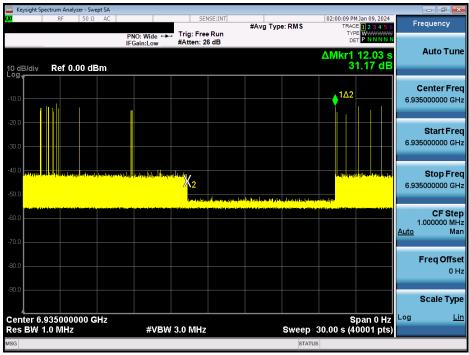


Plot 7-1325. Contention Based Protocol Timing Plot - UNII 8 - 20MHz Channel 197

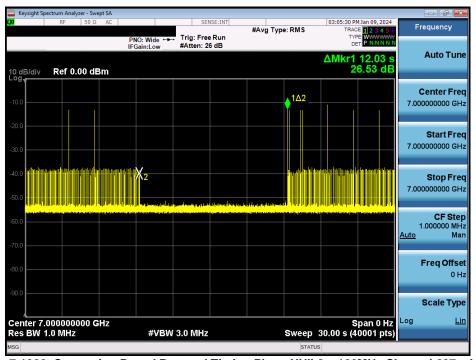


Plot 7-1326. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Low

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 260 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 360 of 523



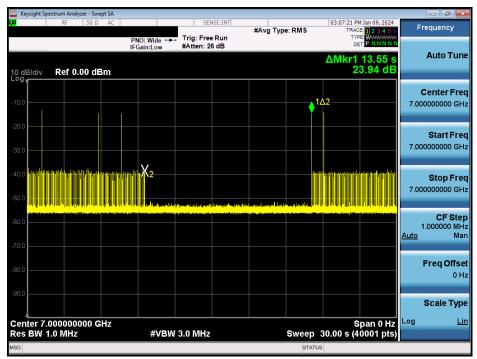

Plot 7-1327. Contention Based Protocol Timing Plot - UNII 8 - 160MHz Channel 207 - Mid

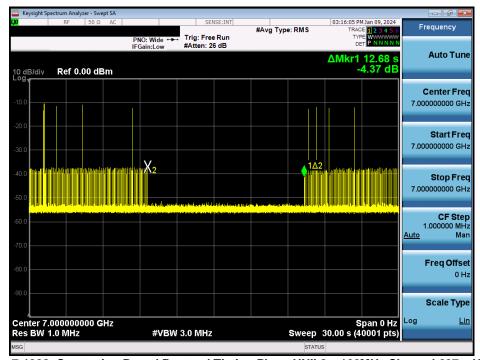


Plot 7-1328. Contention Based Protocol Timing Plot - UNII 8 - 160MHz Channel 207 - High


FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 361 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 361 01 523



CBP Bandwidth Reduction Plots

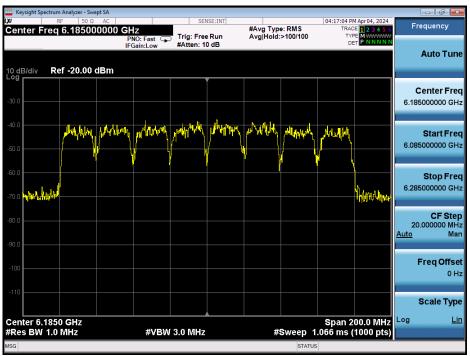


Plot 7-1329. 160MHz Bandwidth - Before AWGN Signal Injected - Channel 47

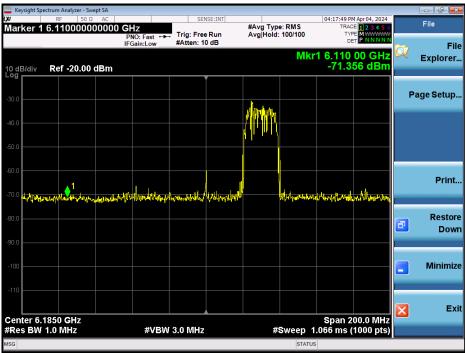

Plot 7-1330. 160MHz Bandwidth - AWGN Signal Injected at Low End - Channel 47

FCC ID: BCGA2903 IC: 579C-A2903	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Dogg 262 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 362 of 523



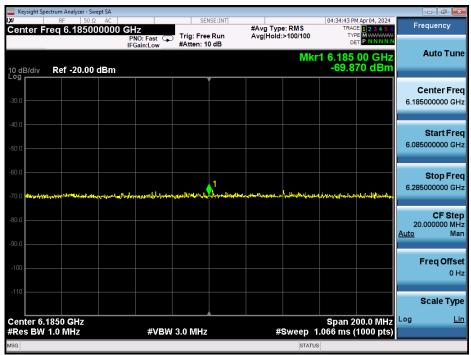

Plot 7-1331. 160MHz Bandwidth - AWGN Signal Injected at Center - Channel 47



Plot 7-1332. 160MHz Bandwidth - AWGN Signal Injected at High End - Channel 47

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogg 262 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 363 of 523	



7.7 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11ax(SU) (20MHz BW), 802.11ax(SU) (40MHz BW), 802.11ax(SU) (80MHz), 802.11ax(SU) (160MHz) and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (8.9) as shown in the table below.

Frequency	Field Strength [µV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-164. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5 KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = power average (RMS)
- 5. Number of measurement points = 1001 (Number of points must be \geq 2 x span/RBW)
- Averaging type = power (RMS)
- 7. Sweep time = auto couple
- 8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

FCC ID: BCGA2903 IC: 579C-A2903	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 364 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 364 01 523



Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

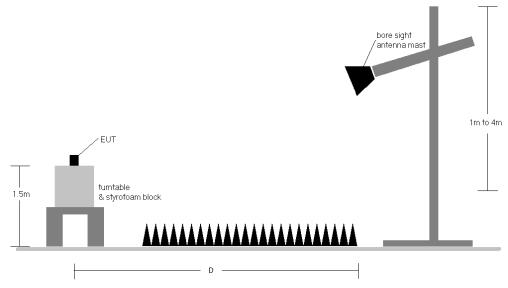


Figure 7-6. Test Instrument & Measurement Setup

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 365 of 523	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 365 01 523	



Test Notes

- 1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-164.
- 2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-164. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
- 3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- 4. This unit was tested with its standard battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
- 6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
- 8. All data rates were investigated and only the worse case is reported
- 9. The unit was tested with all possible modes and only the highest emission is reported.
- 10. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 11. All radiated measurements were tested at the highest supported power setting per band.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- O AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] Preamplifier Gain [dB]
- $\hspace{1cm} \circ \hspace{1cm} \text{Margin} \hspace{0.1cm} {}_{[dB]} = \text{Field Strength Level} \hspace{0.1cm} {}_{[dB\mu\text{V/m}]} \text{Limit} \hspace{0.1cm} {}_{[dB\mu\text{V/m}]}$

Radiated Band Edge Measurement Offset


The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.6 was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) - Preamplifier Gain

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 366 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 366 01 523



7.7.1 Antenna 3c Radiated Spurious Emission

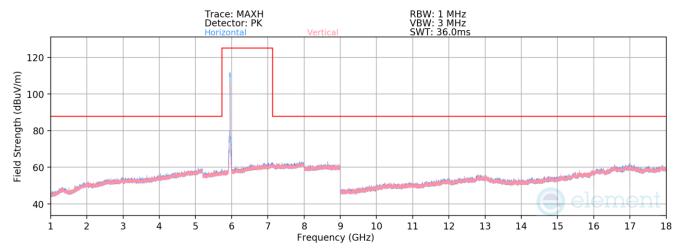

Plot 7-1333. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 1)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5955MHz


Channel: 1

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11910.00	Peak	V	-	-	-74.25	15.67	48.42	73.98	-25.56
*	11910.00	Average	V	-	-	-85.74	15.67	36.93	53.98	-17.05
*	17865.00	Peak	Н	-	-	-74.66	22.53	54.87	73.98	-19.11
*	17865.00	Average	Н	-	-	-86.29	22.53	43.24	53.98	-10.74

Table 7-165. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	ement MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 367 of 523
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 367 01 523



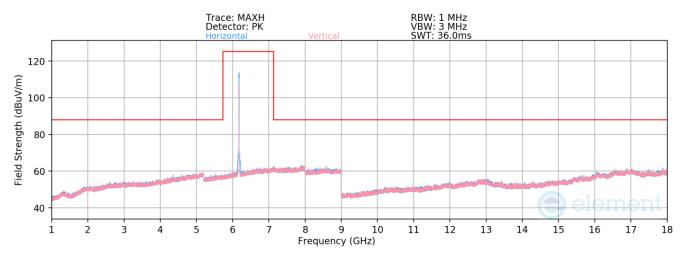

Plot 7-1334. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 45, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6175MHz


Channel: 45

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	12350.00	Peak	V	-	-	-74.37	20.73	53.37	73.98	-20.61
*	12350.00	Average	V	-	-	-85.81	20.73	41.93	53.98	-12.05

Table 7-166. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: Test Dates:		EUT Type:	Dogg 260 of 500
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 368 of 523



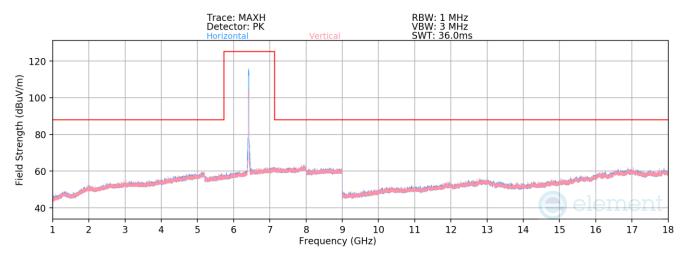

Plot 7-1335. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 93)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6415MHz


Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12830.00	Peak	V	-	ı	-74.22	22.28	55.06	88.23	-33.17
12830.00	Average	V	-	-	-84.86	22.28	44.42	68.23	-23.81

Table 7-167. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: Test Dates:		EUT Type:	Dono 200 of 522
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 369 of 523



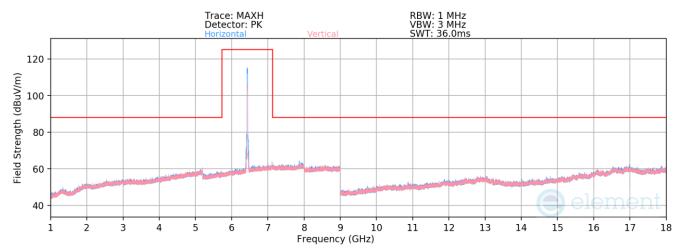

Plot 7-1336. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 97)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6435MHz


Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12870.00	Peak	Н	-	ı	-74.11	21.63	54.52	88.23	-33.71
12870.00	Average	Н	-	-	-84.80	21.63	43.83	68.23	-24.40

Table 7-168. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dags 270 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 370 of 523	



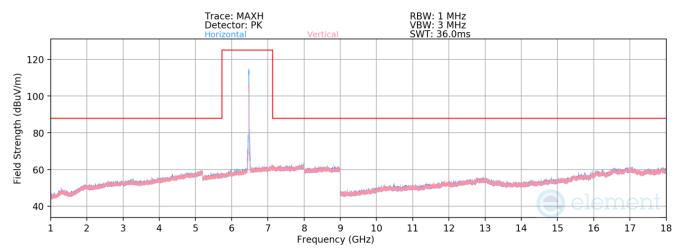

Plot 7-1337. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 105, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6475MHz


Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12950.00	Peak	V	-	-	-74.17	21.76	54.59	88.23	-33.64
12950.00	Average	V	-	-	-86.17	21.76	42.59	68.23	-25.64

Table 7-169. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N: Test Dates:		EUT Type:	Dogo 274 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 371 of 523	



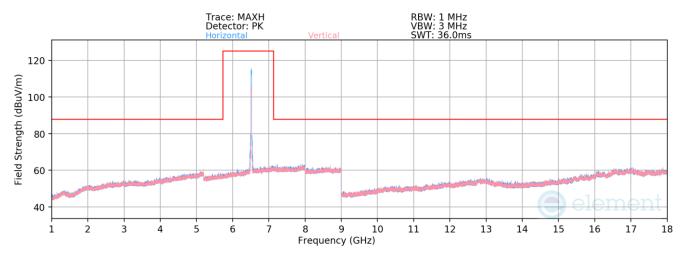

Plot 7-1338. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 113)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6515MHz


Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13030.00	Peak	>	ı	1	-73.87	22.00	55.13	88.23	-33.10
13030.00	Average	V	-	-	-84.38	22.00	44.62	68.23	-23.61

Table 7-170. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N: Test Dates:		EUT Type:	Dogo 272 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 372 of 523	



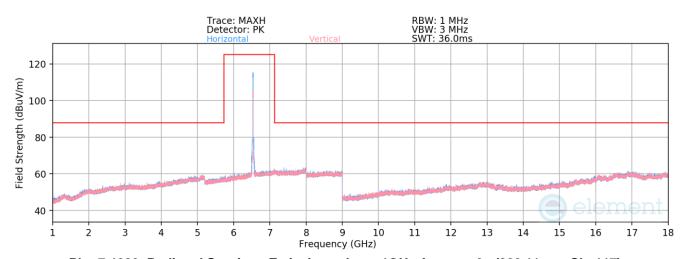

Plot 7-1339. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 117)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6535MHz


Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13070.00	Peak	V	-	ı	-73.60	21.94	55.33	88.23	-32.90
13070.00	Average	V	-	-	-85.53	21.94	43.40	68.23	-24.83

Table 7-171. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 272 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 373 of 523	



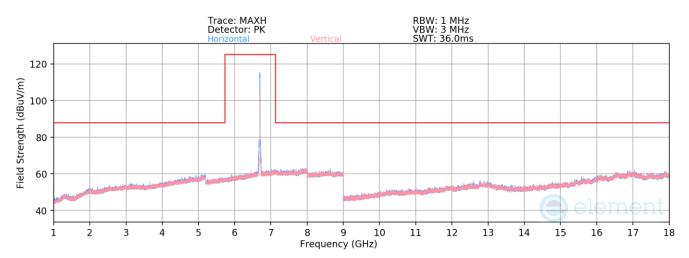

Plot 7-1340. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 149, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6695MHz


Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	13390.00	Peak	V	-	-	-73.85	21.74	54.89	73.98	-19.09
*	13390.00	Average	V	-	-	-85.54	21.74	43.20	53.98	-10.78

Table 7-172. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N: Test Dates:		EUT Type:	Dags 274 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 374 of 523	



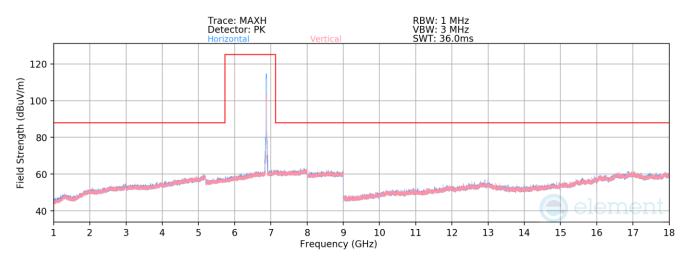

Plot 7-1341. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 185)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6875MHz


Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13750.00	Peak	Н	-	ı	-72.94	21.59	55.65	88.23	-32.58
13750.00	Average	Н	-	-	-84.75	21.59	43.84	68.23	-24.39

Table 7-173. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N: Test Dates:		EUT Type:	Dags 275 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 375 of 523	



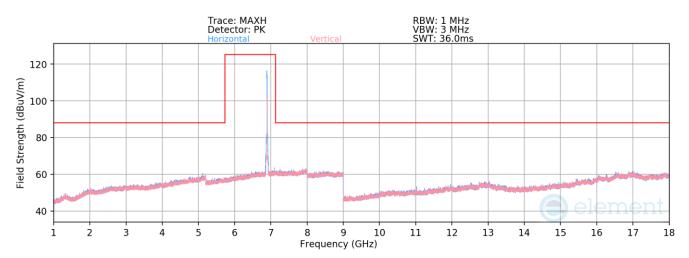

Plot 7-1342. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 189)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6895MHz


Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13790.00	Peak	Н	-	ı	-72.54	21.69	56.15	88.23	-32.08
13790.00	Average	Н	-	-	-84.46	21.69	44.23	68.23	-24.00

Table 7-174. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dags 276 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 376 of 523	



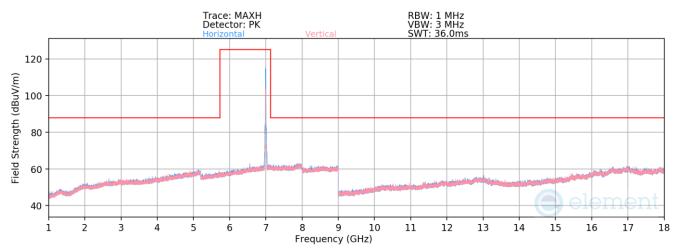

Plot 7-1343. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 209, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6995MHz


Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13990.00	Peak	V	-	ı	-75.13	21.71	53.59	88.23	-34.64
13990.00	Average	V	-	-	-86.47	21.71	42.24	68.23	-25.99

Table 7-175. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N: Test Dates:		EUT Type:	Dags 277 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 377 of 523	



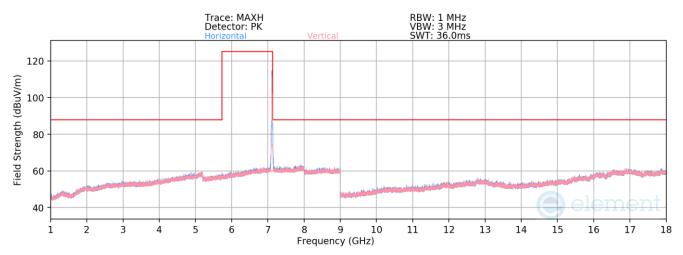

Plot 7-1344. Radiated Spurious Emissions above 1GHz Antenna 3c (802.11ax - Ch. 233)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 7115MHz

Channel: 233


	equency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	4230.00	Peak	Н	-	ı	-74.25	22.49	55.24	88.23	-32.99
1	4230.00	Average	Н	-	-	-86.42	22.49	43.07	68.23	-25.16

Table 7-176. Radiated Spurious Emission Measurements Antenna 3c

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N: Test Dates:		EUT Type:	Dogo 270 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 378 of 523	



7.7.2 Antenna 3a Radiated Spurious Emission

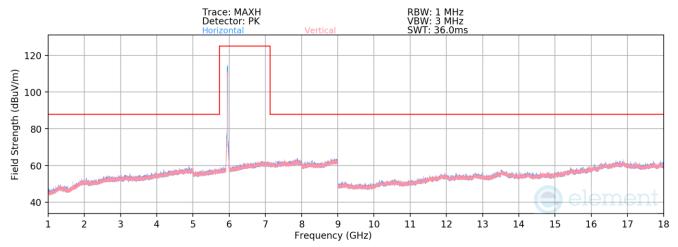

Plot 7-1345. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 1)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5955MHz


Channel: 1

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11910.00	Peak	Н	-	-	-71.91	15.67	50.76	73.98	-23.22
*	11910.00	Average	Н	-	-	-83.66	15.67	39.00	53.98	-14.98
*	17865.00	Peak	V	-	-	-73.60	22.53	55.93	73.98	-18.05
*	17865.00	Average	V	-	-	-85.23	22.53	44.31	53.98	-9.67

Table 7-177. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
		EUT Type:	Dogg 270 of 522
		Tablet Device	Page 379 of 523



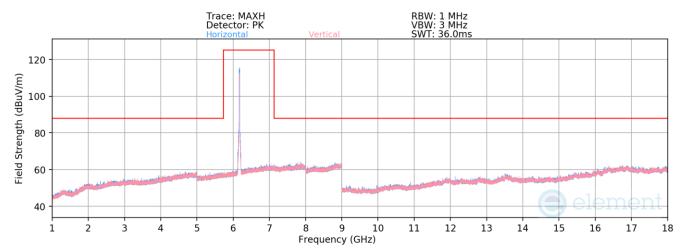

Plot 7-1346. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 45, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6175MHz


Channel: 45

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	12350.00	Peak	Н	-	-	-72.84	20.73	54.89	73.98	-19.09
*	12350.00	Average	Н	-	-	-84.58	20.73	43.16	53.98	-10.82

Table 7-178. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dags 200 of 522	
1C2311270064-26-R1.BCG 11/28/2023 - 04/04/2024		Tablet Device	Page 380 of 523	



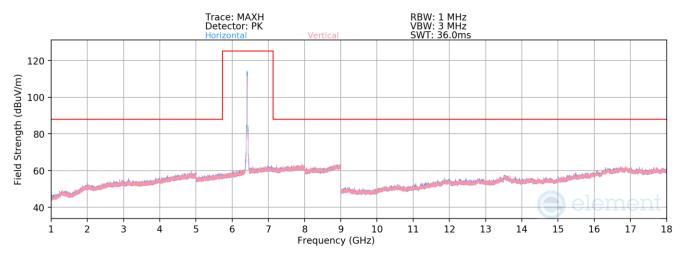

Plot 7-1347. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 93)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6415MHz


Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]	
12830.00	Peak	V	-	ı	-73.75	22.28	55.52	88.23	-32.71	
12830.00	Average	V	-	-	-85.28	22.28	44.00	68.23	-24.23	

Table 7-179. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
I I		EUT Type:	Dogo 204 of 522
		Tablet Device	Page 381 of 523



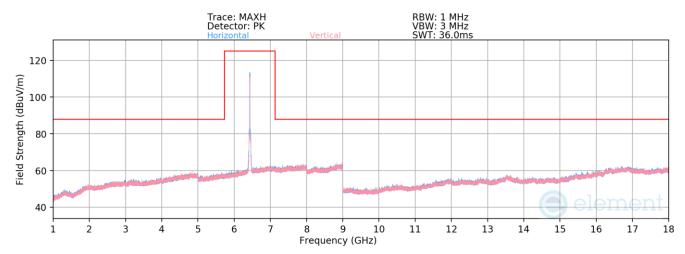

Plot 7-1348. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 97)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6435MHz


Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]	
12870.00	Peak	Н	ı	ı	-73.53	21.63	55.10	88.23	-33.13	
12870.00	Average	Н	-	-	-85.48	21.63	43.15	68.23	-25.08	

Table 7-180. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
		EUT Type:	Dogg 202 of 522
		Tablet Device	Page 382 of 523



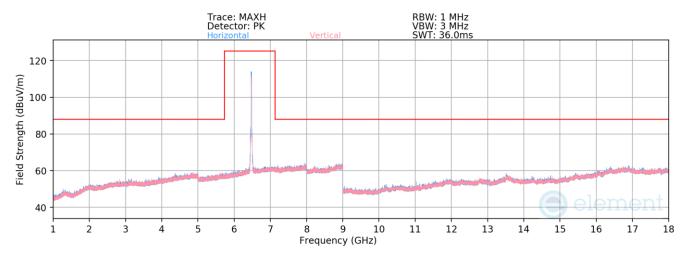

Plot 7-1349. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 105, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6475MHz


Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12950.00	Peak	Н	-	-	-73.19	21.76	55.57	88.23	-32.66
12950.00	Average	Н	-	-	-84.56	21.76	44.20	68.23	-24.03

Table 7-181. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
-		EUT Type:	Dogg 202 of 522
		Tablet Device	Page 383 of 523



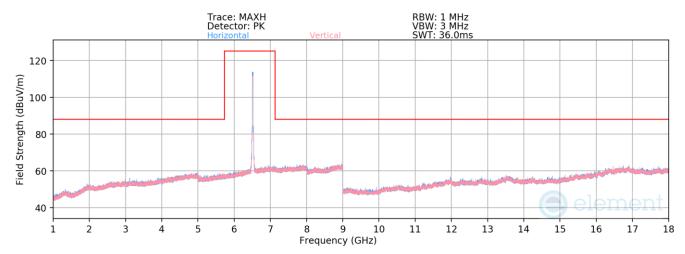

Plot 7-1350. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 113)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6515MHz


Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]	
13030.00	Peak	V	-	-	-73.48	22.00	55.52	88.23	-32.71	
13030.00	Average	V	-	-	-84.22	22.00	44.78	68.23	-23.45	

Table 7-182. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
		EUT Type:	Dogo 204 of 522
		Tablet Device	Page 384 of 523



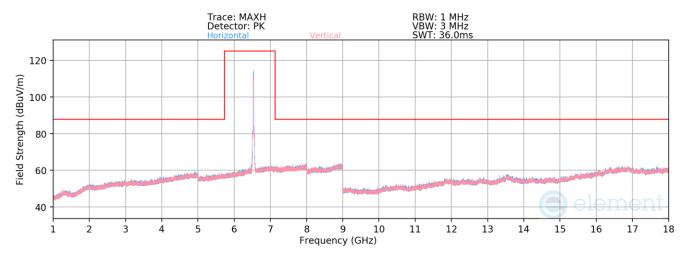

Plot 7-1351. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 117)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6535MHz


Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13070.00	Peak	V	-	-	-73.02	21.94	55.91	88.23	-32.32
13070.00	Average	V	-	-	-85.17	21.94	43.77	68.23	-24.46

Table 7-183. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogg 205 of 500	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 385 of 523	



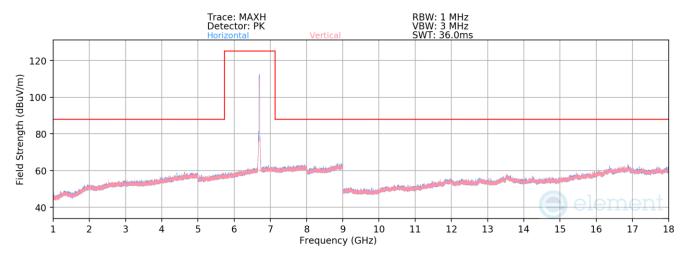

Plot 7-1352. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 149, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6695MHz


Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]	
*	13390.00	Peak	V	-	ı	-73.02	21.74	55.73	73.98	-18.25	
*	13390.00	Average	V	-	-	-84.54	21.74	44.21	53.98	-9.77	

Table 7-184. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 386 of 523	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device		



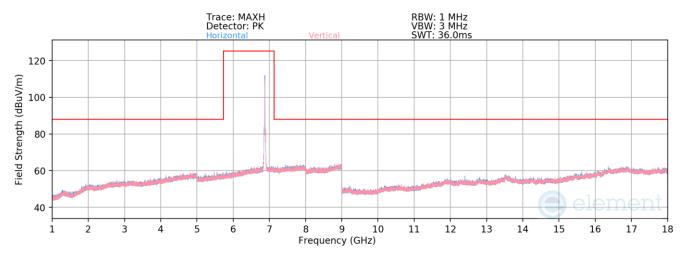

Plot 7-1353. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 185)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6875MHz


Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13750.00	Peak	V	-	-	-72.74	21.59	55.85	88.23	-32.38
13750.00	Average	V	-	-	-83.75	21.59	44.84	68.23	-23.39

Table 7-185. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 387 of 523	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device		



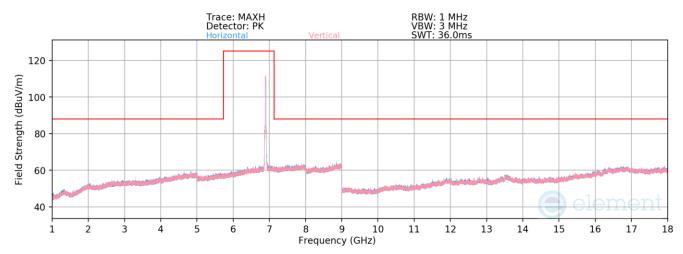

Plot 7-1354. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 189)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6895MHz


Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13790.00	Peak	V	-	ı	-72.67	21.69	56.02	88.23	-32.21
13790.00	Average	V	-	-	-83.27	21.69	45.42	68.23	-22.81

Table 7-186. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 388 of 523	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device		



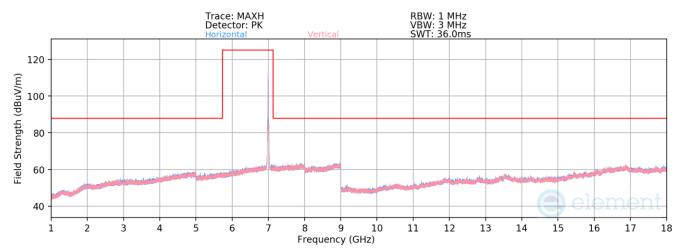

Plot 7-1355. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 209, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6995MHz


Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13990.00	Peak	V	-	-	-72.12	21.71	56.59	88.23	-31.64
13990.00	Average	V	-	-	-83.37	21.71	45.34	68.23	-22.89

Table 7-187. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 200 of 502
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 389 of 523



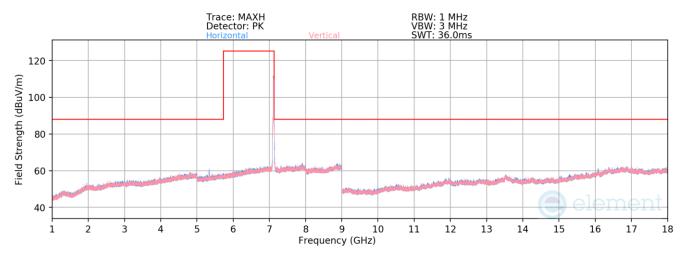

Plot 7-1356. Radiated Spurious Emissions above 1GHz Antenna 3a (802.11ax - Ch. 233)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 7115MHz

Channel: 233


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
5332.00	Peak	Н	123	204	-70.29	19.94	56.65	88.23	-31.58
5332.00	Average	Н	123	204	-76.26	19.94	50.68	68.23	-17.55
14230.00	Peak	V	-	-	-72.61	22.49	56.88	88.23	-31.35
14230.00	Average	V	-	-	-83.13	22.49	46.36	68.23	-21.87

Table 7-188. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2903 IC: 579C-A2903	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dags 200 of 522	
1C2311270064-26-R1.BCG	11/28/2023 - 04/04/2024	Tablet Device	Page 390 of 523	



7.7.3 Antenna 1b Radiated Spurious Emission

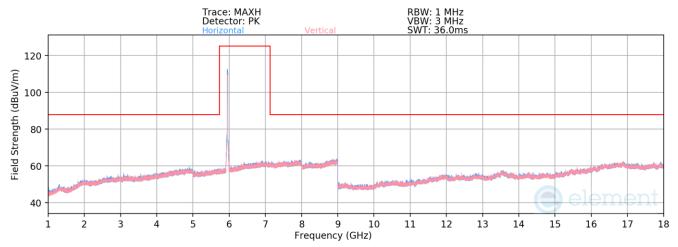

Plot 7-1357. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax - Ch. 1)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5955MHz


Channel: 1

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11910.00	Peak	Н	-	-	-71.96	15.67	50.71	73.98	-23.27
*	11910.00	Average	Н	-	-	-84.10	15.67	38.57	53.98	-15.41
*	17865.00	Peak	V	-	-	-72.64	22.53	56.89	73.98	-17.09
*	17865.00	Average	V	-	-	-85.24	22.53	44.29	53.98	-9.69

Table 7-189. Radiated Spurious Emission Measurements Antenna 1b

FCC ID: BCGA2903 C: 579C-A2903 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 204 of 502	
1C2311270064-26-R1.BCG 11/28/2023 - 04/04/2024		Tablet Device	Page 391 of 523	



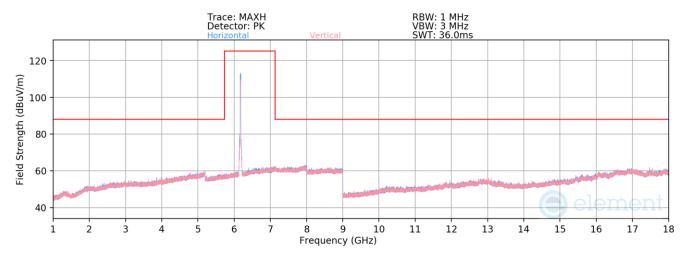

Plot 7-1358. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax - Ch. 45, MCS0)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6175MHz


Channel: 45

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	12350.00	Peak	V	-	-	-74.67	20.73	53.06	73.98	-20.92
*	12350.00	Average	V	-	-	-85.96	20.73	41.78	53.98	-12.20

Table 7-190. Radiated Spurious Emission Measurements Antenna 1b

FCC ID: BCGA2903 C: 579C-A2903 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogg 202 of 522	
1C2311270064-26-R1.BCG 11/28/2023 - 04/04/2024		Tablet Device	Page 392 of 523	



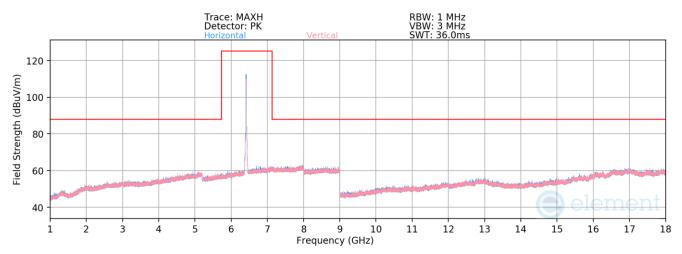

Plot 7-1359. Radiated Spurious Emissions above 1GHz Antenna 1b (802.11ax - Ch. 93)

Mode: 802.11ax

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6415MHz

Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12830.00	Peak	Н	ı	i	-73.72	22.28	55.55	88.23	-32.68
12830.00	Average	Н	-	-	-86.16	22.28	43.12	68.23	-25.11

Table 7-191. Radiated Spurious Emission Measurements Antenna 1b

FCC ID: BCGA2903 C: 579C-A2903 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogg 202 of 522	
1C2311270064-26-R1.BCG 11/28/2023 - 04/04/2024		Tablet Device	Page 393 of 523	