


## Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

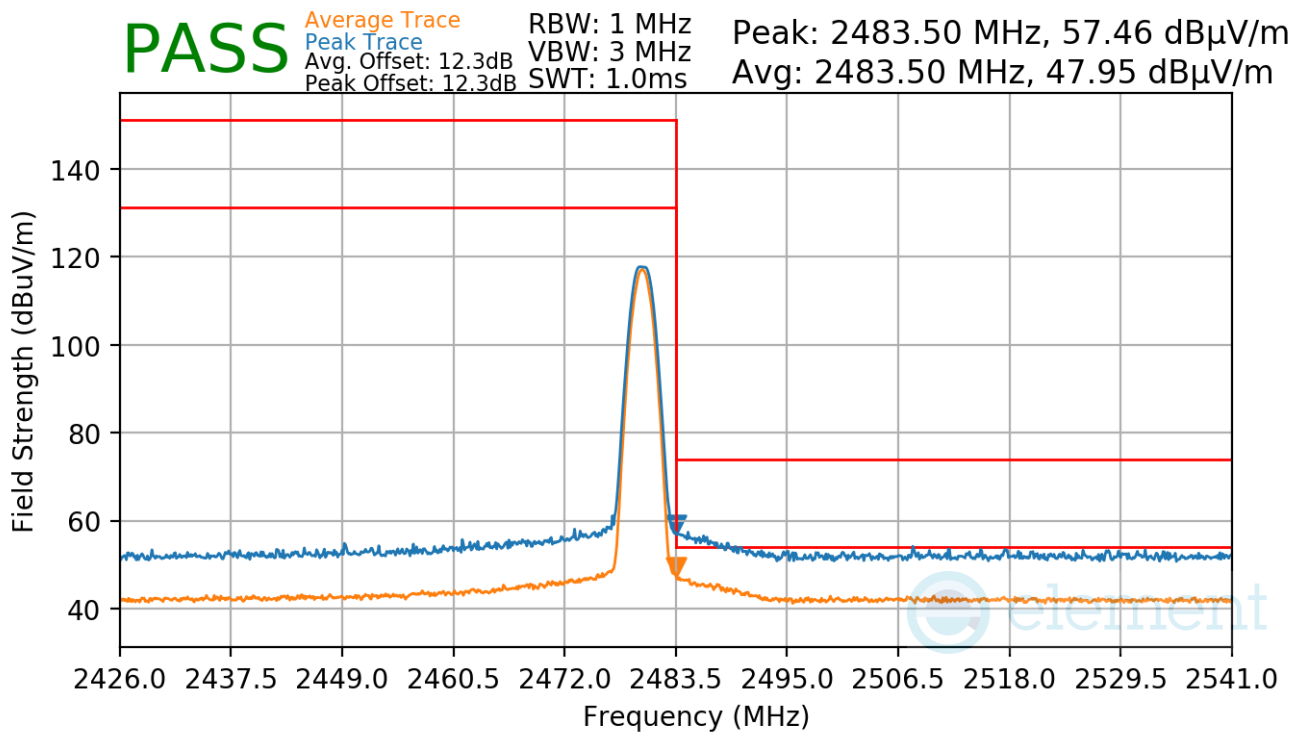

Plot 7-96. Radiated Restricted Upper Band Edge Measurement Antenna 1a (Average & Peak)

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 87 of 102

V 10.6 09/12/2023

## Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode: LE


Data Rate: 2Mbps

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2404MHz

Channel: 1

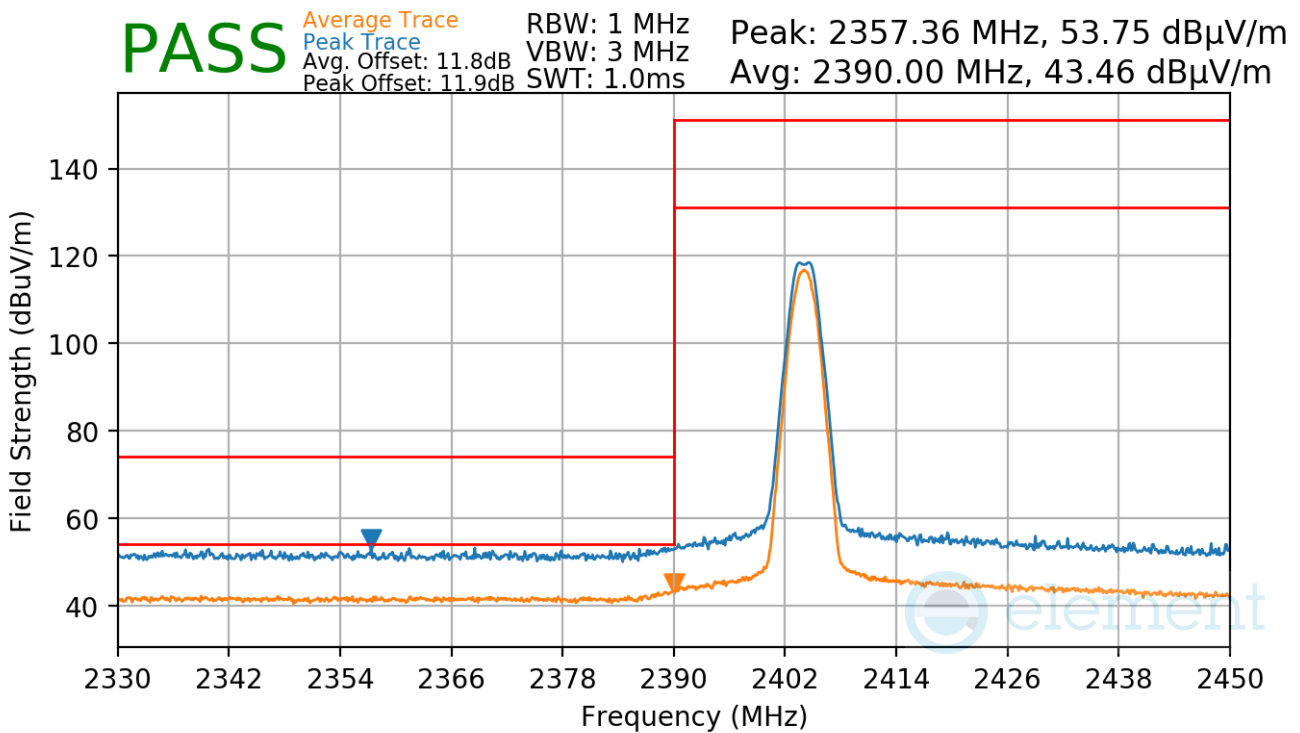

Plot 7-97. Radiated Restricted Lower Band Edge Measurement Antenna 1a (Average & Peak)


FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 88 of 102

V 10.6 09/12/2023

## Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	38

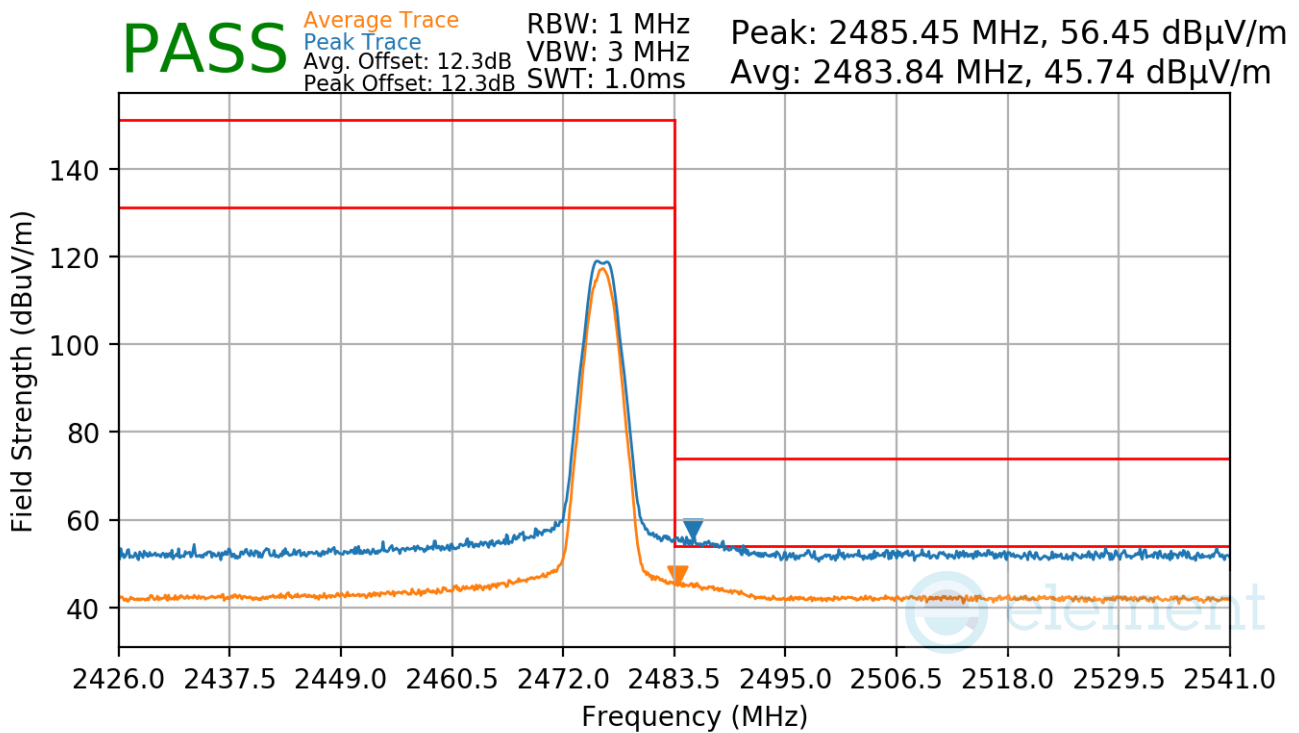

Plot 7-98. Radiated Restricted Upper Band Edge Measurement Antenna 1a (Average & Peak)

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 89 of 102


V 10.6 09/12/2023

# Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

## TxBF

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

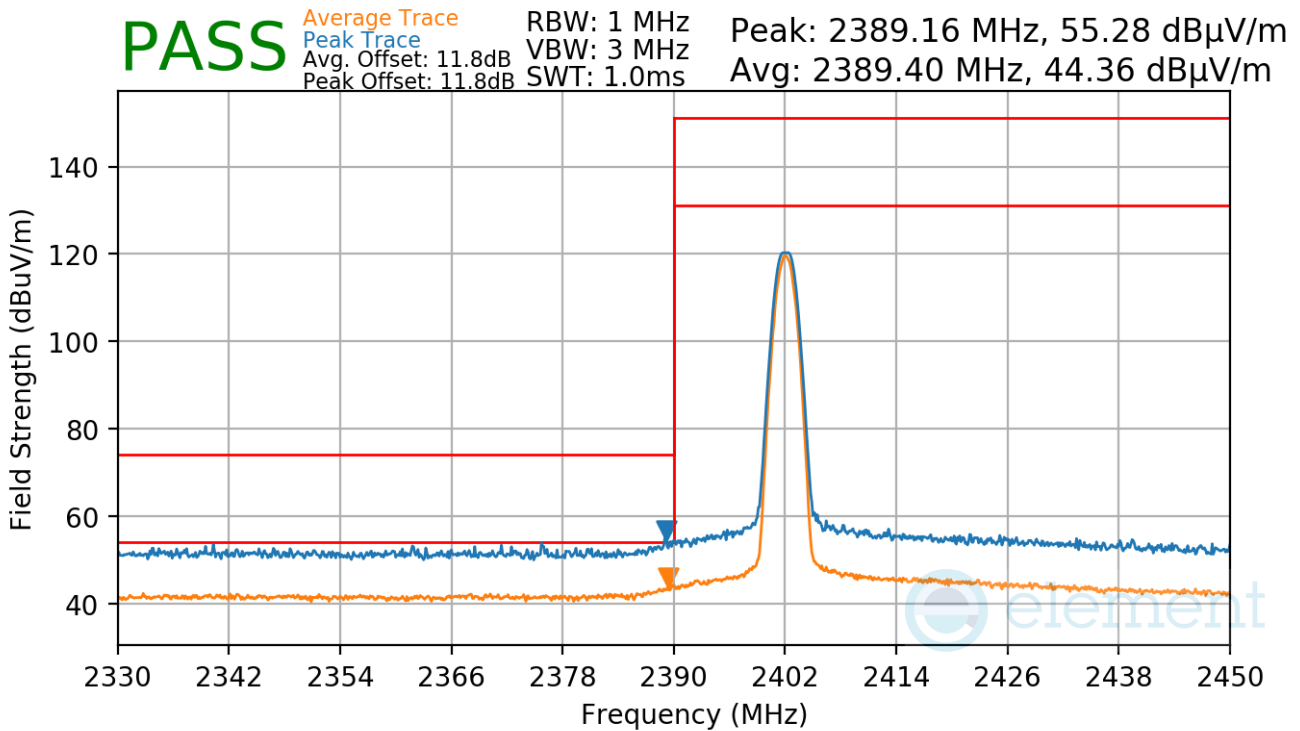

Plot 7-99. Radiated Restricted Lower Band Edge Measurement TxBF (Average & Peak)


FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 90 of 102

V 10.6 09/12/2023

## Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

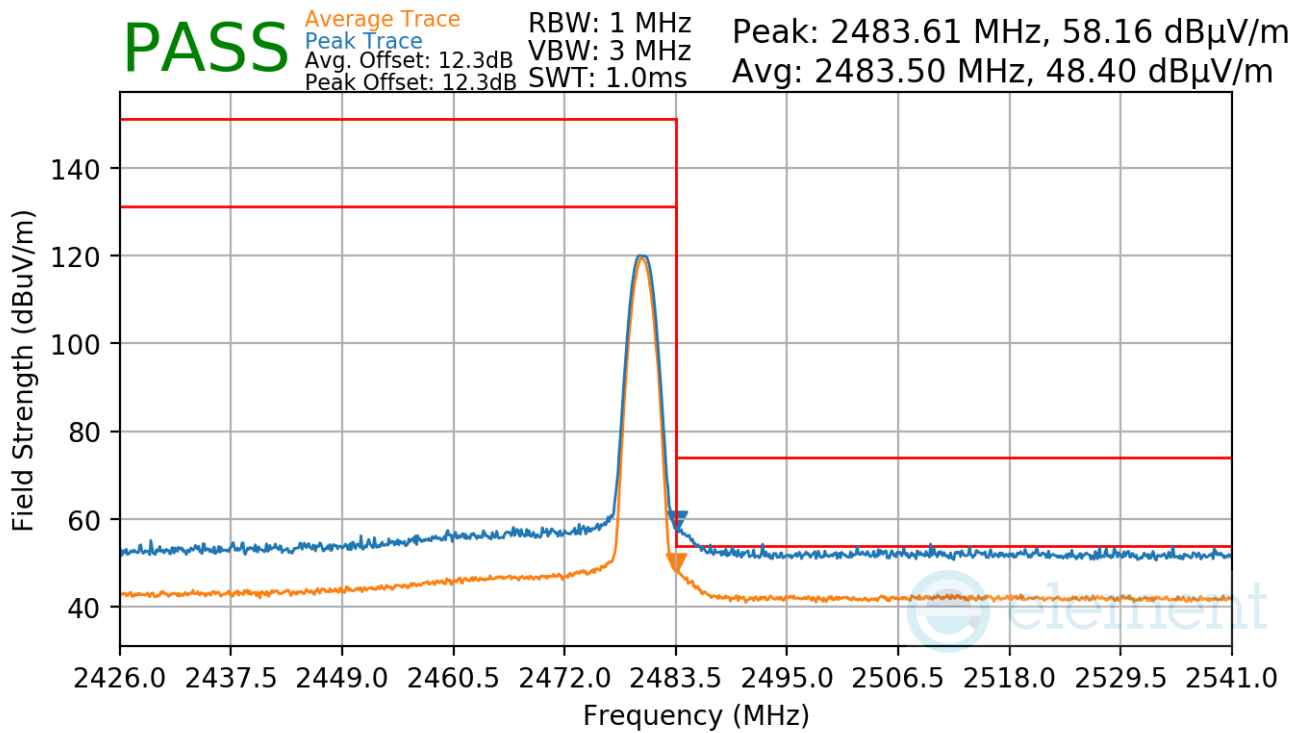

Plot 7-100. Radiated Restricted Upper Band Edge Measurement TxBF (Average & Peak)

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 91 of 102

V 10.6 09/12/2023

## Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode: LE


Data Rate: 2Mbps

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2404MHz

Channel: 1

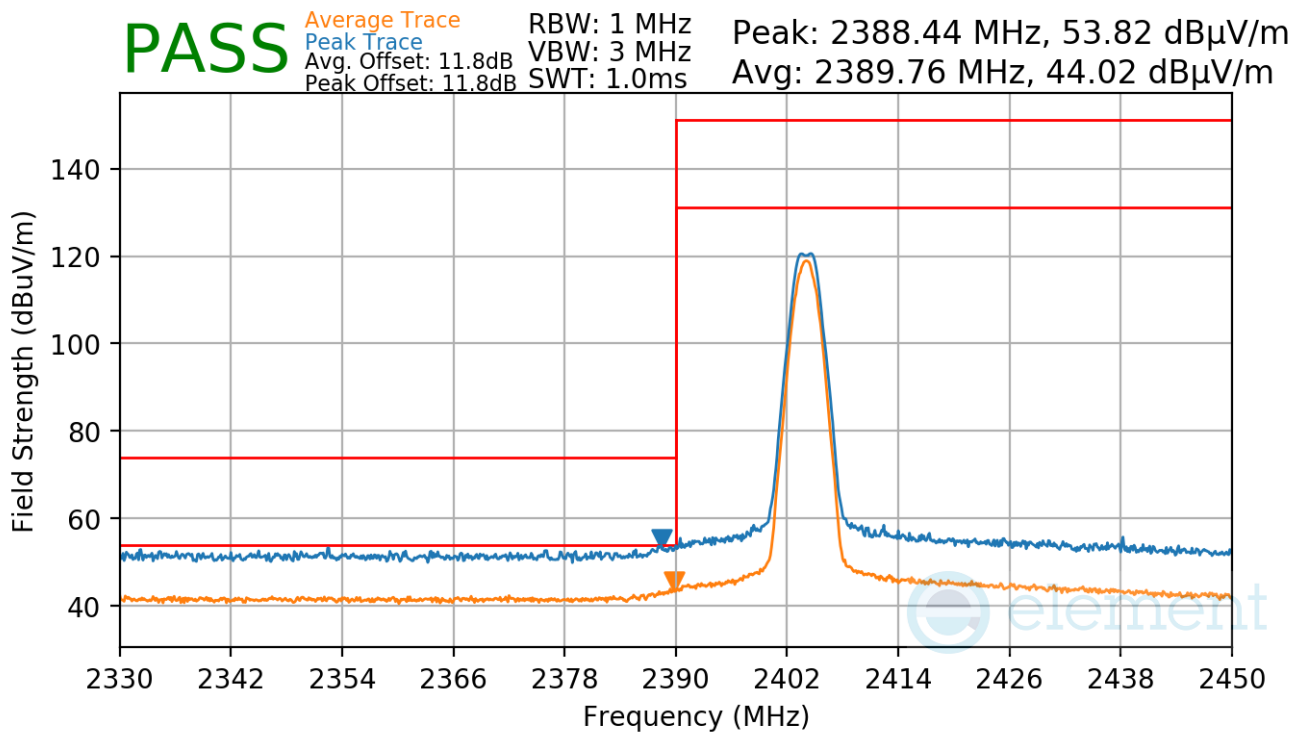

Plot 7-101. Radiated Restricted Lower Band Edge Measurement TxBF (Average & Peak)


FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 92 of 102

V 10.6 09/12/2023

## Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	38

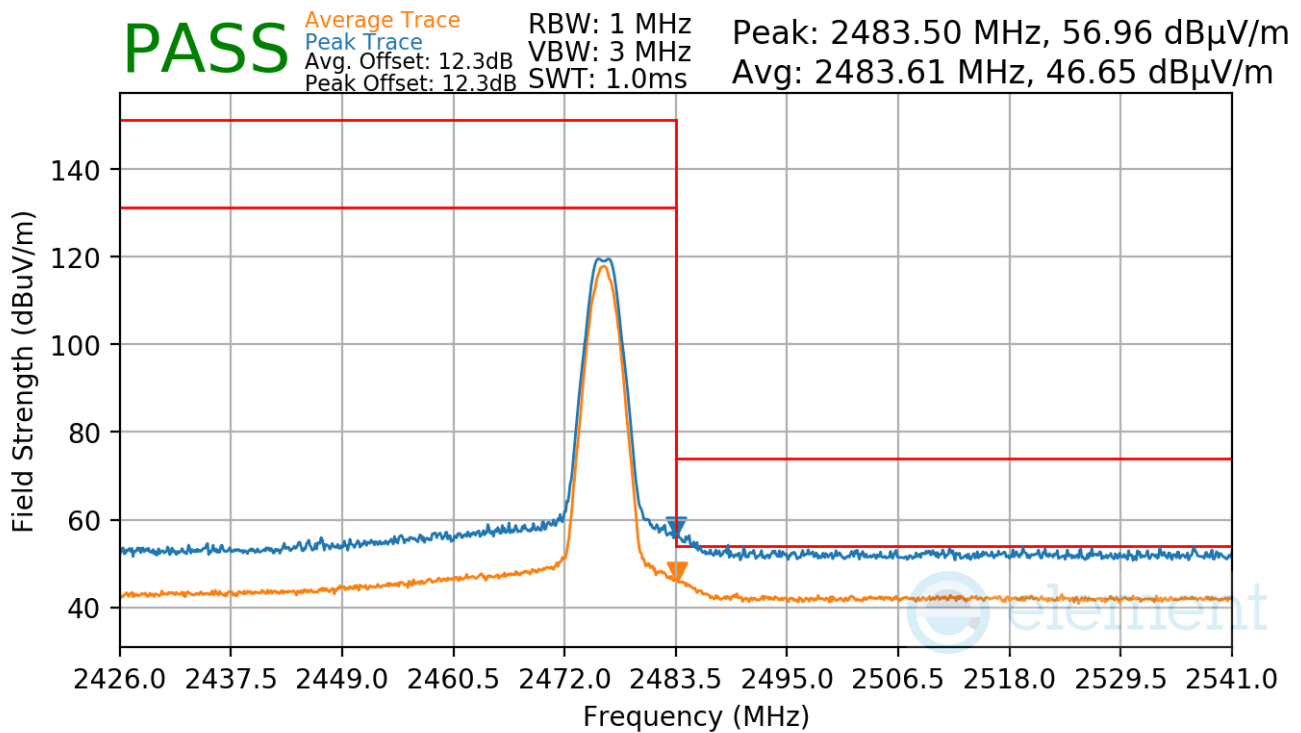

Plot 7-102. Radiated Restricted Upper Band Edge Measurement TxBF (Average & Peak)

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 93 of 102

V 10.6 09/12/2023

## 7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-23 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-23. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 94 of 102

V 10.6 09/12/2023




**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

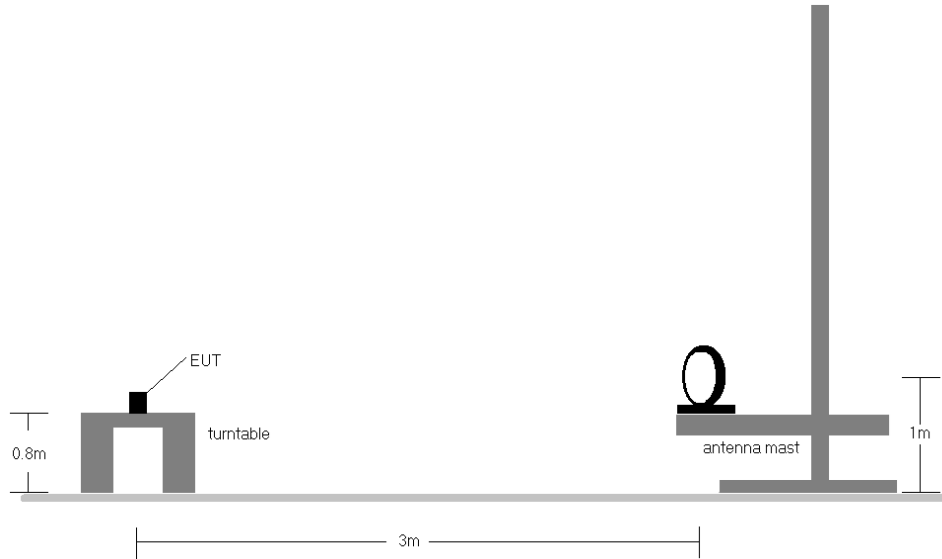

**Figure 7-7. Radiated Test Setup < 30MHz**

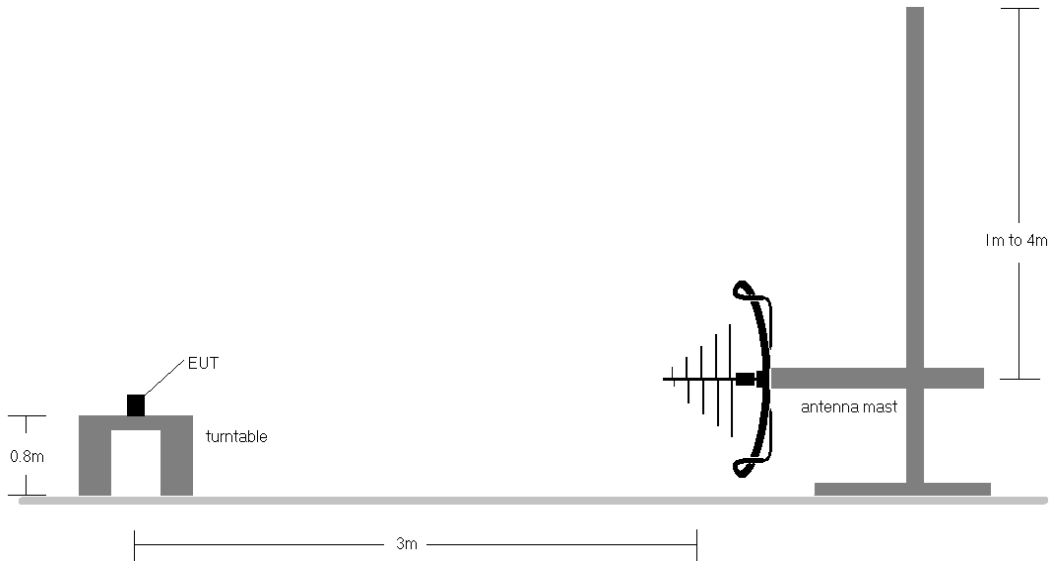

**Figure 7-8. Radiated Test Setup < 1GHz**

<b>FCC ID:</b> BCGA2903 <b>IC:</b> 579C-A2903		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270064-19.BCG	<b>Test Dates:</b> 11/28/2023 – 3/4/2024	<b>EUT Type:</b> Tablet Device	Page 95 of 102

**Test Notes**

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-23.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger

**Sample Calculations**

**Determining Spurious Emissions Levels**


- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

<b>FCC ID:</b> BCGA2903 <b>IC:</b> 579C-A2903		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270064-19.BCG	<b>Test Dates:</b> 11/28/2023 – 3/4/2024	<b>EUT Type:</b> Tablet Device	Page 96 of 102

## 7.8.1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

### TxBF

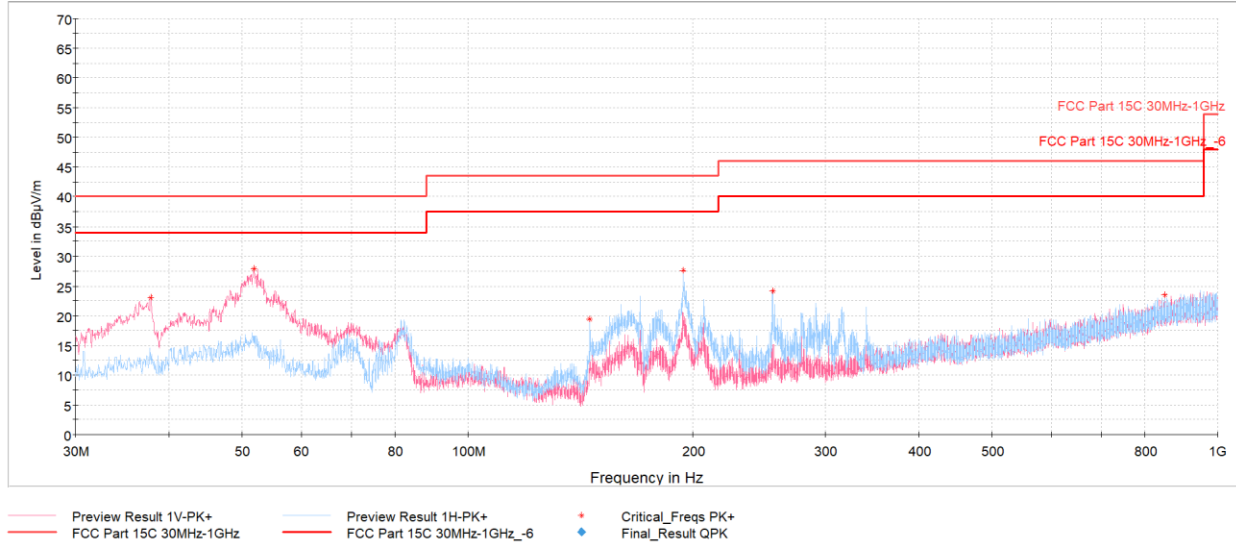

Plot 7-103. Radiated Spurious Emissions Below 1GHz TxBF (1Mbps, ePA – Ch.19, Pol. H & V, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.76	Max-Peak	V	100	348	-68.91	-15.06	23.03	40.00	-16.97
51.92	Max-Peak	V	100	305	-66.00	-13.13	27.87	40.00	-12.13
145.58	Max-Peak	H	200	189	-67.04	-20.56	19.40	43.52	-24.12
194.08	Max-Peak	H	100	217	-62.42	-16.92	27.66	43.52	-15.86
255.14	Max-Peak	H	100	276	-67.75	-15.11	24.14	46.02	-21.88
849.21	Max-Peak	H	100	82	-80.32	-3.17	23.51	46.02	-22.51

Table 7-24. Radiated Spurious Emissions Below 1GHz TxBF (1Mbps, ePA – Ch.19, Pol. H & V, with AC/DC Adapter)

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 97 of 102

V 10.6 09/12/2023

## 7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-25. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Subclause 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Average Measurements


1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 98 of 102

V 10.6 09/12/2023

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

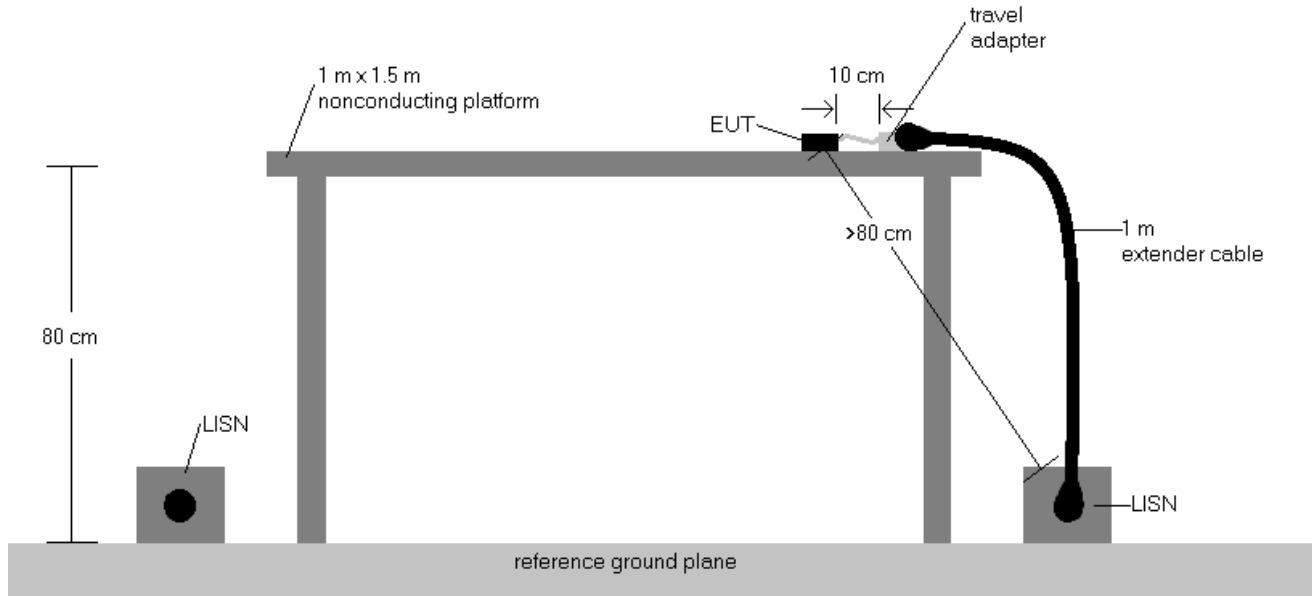


**Figure 7-9. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
4.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6.  $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using a quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 99 of 102

V 10.6 09/12/2023

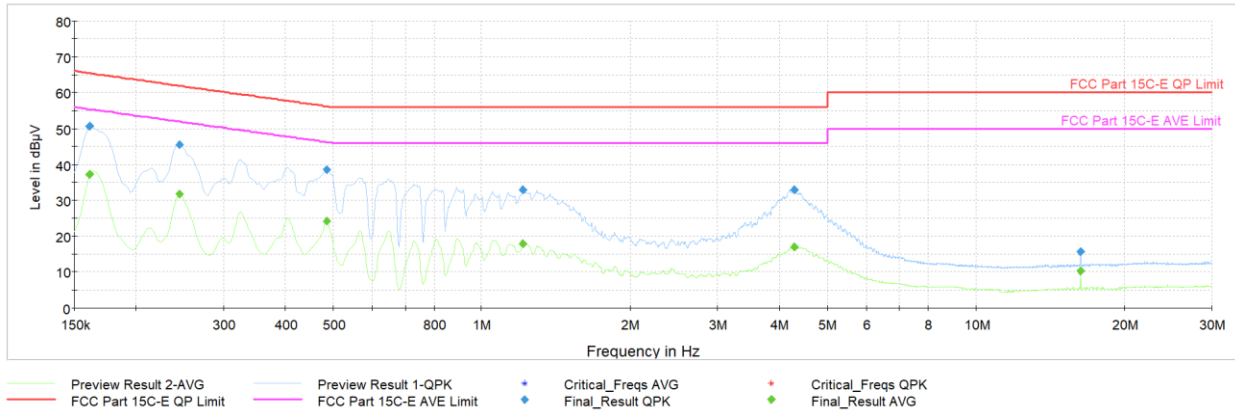


**Plot 7-104. AC Line Conducted Plot with Bluetooth LE TxBF (L1, 1Mbps ePA – Ch.19 with AC/DC Charger)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.161	FINAL	---	37.27	55.40	-18.13	L1	GND
0.161	FINAL	50.5	---	65.40	-14.86	L1	GND
0.245	FINAL	---	31.79	51.94	-20.15	L1	GND
0.245	FINAL	45.5	---	61.94	-16.45	L1	GND
0.485	FINAL	---	24.24	46.25	-22.01	L1	GND
0.485	FINAL	38.6	---	56.25	-17.65	L1	GND
1.212	FINAL	32.9	---	56.00	-23.13	L1	GND
1.212	FINAL	---	17.89	46.00	-28.11	L1	GND
4.297	FINAL	32.9	---	56.00	-23.06	L1	GND
4.297	FINAL	---	17.07	46.00	-28.93	L1	GND
16.296	FINAL	---	10.40	50.00	-39.60	L1	GND
16.296	FINAL	15.6	---	60.00	-44.42	L1	GND

**Table 7-26. AC Line Conducted Data with Bluetooth LE TxBF (L1, 1Mbps ePA – Ch.19 with AC/DC Charger)**

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 100 of 102

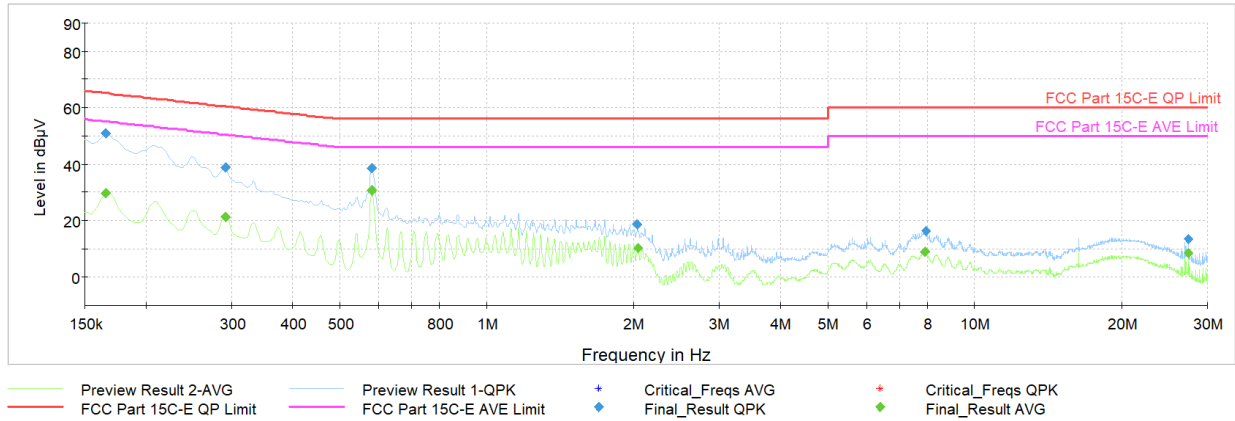

**Plot 7-105. AC Line Conducted Plot with Bluetooth LE TxBF (N, 1Mbps ePA – Ch.19, with Laptop Charger)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	---	29.86	55.17	-25.32	N	GND
0.166	FINAL	50.8	---	65.17	-14.39	N	GND
0.292	FINAL	---	21.39	50.47	-29.08	N	GND
0.292	FINAL	38.8	---	60.47	-21.69	N	GND
0.582	FINAL	---	30.62	46.00	-15.38	N	GND
0.582	FINAL	38.6	---	56.00	-17.45	N	GND
2.036	FINAL	18.7	---	56.00	-37.35	N	GND
2.038	FINAL	---	10.36	46.00	-35.64	N	GND
7.924	FINAL	---	8.74	50.00	-41.26	N	GND
7.926	FINAL	16.3	---	60.00	-43.66	N	GND
27.386	FINAL	13.4	---	60.00	-46.65	N	GND
27.389	FINAL	---	8.65	50.00	-41.35	N	GND

**Table 7-27. AC Line Conducted Data with Bluetooth LE TxBF (N, 1Mbps ePA – Ch.19 with Laptop Charger)**

FCC ID: BCGA2903 IC: 579C-A2903		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270064-19.BCG	Test Dates: 11/28/2023 – 3/4/2024	EUT Type: Tablet Device	Page 101 of 102

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2903 and IC: 579C-A2903** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

<b>FCC ID:</b> BCGA2903 <b>IC:</b> 579C-A2903	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270064-19.BCG	<b>Test Dates:</b> 11/28/2023 – 3/4/2024	<b>EUT Type:</b> Tablet Device
		Page 102 of 102

V 10.6 09/12/2023