

**MEASUREMENT REPORT**

**FCC PART 15.407/ ISED RSS-247 Narrowband UNII HDR**

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

11/29/23-3/22/2024

**Test Report Issue Date:**

4/4/2024

**Test Site/Location:**

Element Materials Technology Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2311270069-09.BCG

<b>FCC ID:</b>	<b>BCGA2925</b>
<b>IC:</b>	<b>579C-A2925</b>
<b>APPLICANT:</b>	<b>Apple Inc.</b>

**Application Type:**

Certification

**Model/HVIN:**

A2925

**EUT Type:**

Tablet Device

**Frequency Range:**

5162 – 5245MHz, 5733 – 5844MHz

**Modulation Type:**

$\pi/4$  DQPSK

**FCC Classification:**

Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):**

Part 15 Subpart E (15.407)

**ISED Specification:**


RSS-247 Issue 3

**Test Procedure(s):**

ANSI C63.10-2013, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

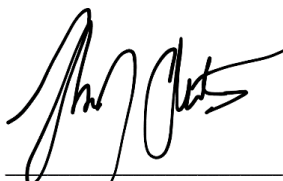

RJ Ortanez  
Executive Vice President

**Prepared by:** WKR0000010551

**Reviewed by:** WKR0000005805




<b>FCC ID:</b> BCGA2925 <b>IC:</b> 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 1 of 179


# TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	Element Materials Technology Test Location .....	4
1.3	Test Facility / Accreditations .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities .....	5
2.3	Antenna Description .....	7
2.4	Test Support Equipment .....	7
2.5	Test Configuration .....	8
2.6	Software and Firmware .....	8
2.7	EMI Suppression Device(s)/Modifications .....	8
3.0	DESCRIPTION OF TESTS .....	9
3.1	Evaluation Procedure .....	9
3.2	AC Line Conducted Emissions .....	9
3.3	Radiated Emissions .....	10
3.4	Environmental Conditions .....	10
4.0	ANTENNA REQUIREMENTS .....	11
5.0	MEASUREMENT UNCERTAINTY .....	12
6.0	TEST EQUIPMENT CALIBRATION DATA .....	13
7.0	TEST RESULTS .....	14
7.1	Summary .....	14
7.2	26dB & 99% Bandwidth Measurement – HDR .....	15
7.2.1	Antenna WF5B 26dB & 99% Bandwidth Measurements .....	16
7.2.2	Antenna WF8 26dB & 99% Bandwidth Measurements .....	20
7.2.3	Antenna WF7 26dB & 99% Bandwidth Measurements .....	24
7.3	6dB & 99% Bandwidth Measurement – HDR .....	28
7.3.1	Antenna WF5B 6dB & 99% Bandwidth Measurements .....	29
7.3.2	Antenna WF8 6dB & 99% Bandwidth Measurements .....	33
7.3.3	Antenna WF7 6dB & 99% Bandwidth Measurements .....	37
7.4	Conducted Output Power and Max EIRP Measurement – HDR .....	41
7.4.1	Conducted Output Power Measurements .....	42
7.5	Maximum Power Spectral Density – HDR .....	51
7.5.1	Antenna WF5B Power Spectral Density Measurements .....	52
7.5.2	Antenna WF8 Power Spectral Density Measurements .....	69
7.5.3	Antenna WF7 Power Spectral Density Measurements .....	85
7.5.4	TxBF Power Spectral Density Measurements .....	99
7.6	Radiated Spurious Emission – Above 1GHz .....	132
7.6.1	Antenna WF5B Radiated Spurious Emission (1-18GHz) .....	135
7.6.2	Antenna WF8 Radiated Spurious Emission (1-18GHz) .....	141
7.6.3	Antenna WF7 Radiated Spurious Emission (1-18GHz) .....	147
7.6.4	TxBF Radiated Spurious Emission (Above 1GHz) .....	153
7.6.5	Radiated Band Edge Measurements .....	159
7.7	Radiated Spurious Emissions – Below 1GHz .....	171
7.8	AC Line Conducted Emissions Measurement .....	175
8.0	CONCLUSION .....	179

FCC ID: BCGA2925 IC: 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 2 of 179



# MEASUREMENT REPORT



UNII Band	Tx Frequency [MHz]	Mode	Power Scheme	SISO						TxBF					
				Antenna WF5B		Antenna WF8		Antenna WF7		Antenna WF5B		Antenna WF8		Summed	
				Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
1	5162 - 5245	HDR4	ePA	17.50	12.43	10.00	10.00	7.94	9.00	8.72	9.41	8.77	9.43	17.42	12.41
		HDR8	ePA	19.89	12.99	10.00	10.00	7.50	8.75	15.75	11.97	10.00	10.00	25.41	14.05
		HDR4	iPA	1.76	2.46	1.78	2.50	1.58	2.00	1.75	2.44	1.75	2.43	3.51	5.45
		HDR8	iPA	1.77	2.49	1.70	2.31	1.77	2.48	1.78	2.50	1.77	2.48	3.55	5.50
3	5733 - 5844	HDR4	ePA	22.37	13.50	8.91	9.50	7.92	8.99	20.59	13.14	8.59	9.34	28.91	14.61
		HDR8	ePA	22.33	13.49	8.91	9.50	7.86	8.96	21.21	13.27	8.87	9.48	30.06	14.78
		HDR4	iPA	1.51	1.80	1.58	2.00	1.58	2.00	1.58	2.00	1.58	1.98	3.16	5.00
		HDR8	iPA	1.58	2.00	1.58	2.00	1.58	2.00	1.58	1.97	1.54	1.88	3.10	4.91

## FCC EUT Overview

UNII Band	Tx Frequency [MHz]	Mode	Power Scheme	SISO						TxBF					
				Antenna WF5B		Antenna WF8		Antenna WF7		Antenna WF5B		Antenna WF8		Summed	
				Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
1	5162 - 5245	HDR4	ePA	8.91	9.50	7.94	9.00	7.94	9.00	2.24	3.50	1.91	2.80	4.14	6.17
		HDR8	ePA	15.62	11.94	10.00	10.00	7.50	8.75	3.98	6.00	3.55	5.50	7.52	8.76
		HDR4	iPA	1.76	2.46	1.78	2.50	1.58	2.00	1.75	2.44	1.75	2.43	3.51	5.45
		HDR8	iPA	1.77	2.49	1.70	2.31	1.77	2.48	1.78	2.50	1.77	2.48	3.55	5.50
3	5733 - 5844	HDR4	ePA	22.37	13.50	8.91	9.50	7.92	8.99	20.59	13.14	8.59	9.34	28.91	14.61
		HDR8	ePA	22.33	13.49	8.91	9.50	7.86	8.96	21.21	13.27	8.87	9.48	30.06	14.78
		HDR4	iPA	1.51	1.80	1.58	2.00	1.58	2.00	1.58	2.00	1.58	1.98	3.16	5.00
		HDR8	iPA	1.58	2.00	1.58	2.00	1.58	2.00	1.58	1.97	1.54	1.88	3.10	4.91

## ISED EUT Overview

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 3 of 179

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB# US0110) for ISED Canada as designed by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs)

<b>FCC ID:</b> BCGA2925 <b>IC:</b> 579C-A2925	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 4 of 179

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2925, IC: 579C-A2925**. The test data contained in this report pertains only to the emissions due to the EUT's Narrowband UNII transmitter.

- This Narrowband UNII module has been tested by manufacturer and the following were confirmed:
  - A) The hopping sequence is pseudorandom
  - B) 79 channels can be used at a time for hopping
  - C) The receiver input bandwidth equals the transmit bandwidth
  - D) The receiver hops in sequence with the transmit signal
  - E) Narrowband UNII can only hop within the same UNII band and cannot hop between bands

**Test Device Serial No.:** DLXH170001W0000639, XVXQHXP321, FP0XV3X4YN, Q29DT4LGWY

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), 802.11a/ax WIFI 6E, NB UNII (1x, HDR4, HDR8), WPT, 802.15.4.

This device supports BT Beamforming.

Band 1	Band 3
Frequency (MHz)	Frequency (MHz)
5162	5733
:	:
5204	5789
:	:
5245	5844

**Table 2-1. NB UNII HDR Frequency / Channel Operations**

**Note:**

This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the U-NII Band 1 & U-NII Band 3. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles			
Band	Mode	Duty Cycle [%]	
UNII-1	HDR4	ePA	100.0
		iPA	100.0
UNII-3	HDR4	ePA	100.0
		iPA	100.0
UNII-1	HDR8	ePA	100.0
		iPA	100.0
UNII-3	HDR8	ePA	100.0
		iPA	100.0

**Table 2-2. Measured Duty Cycles**

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 5 of 179



This device supports simultaneous transmission operations. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8
WF8	Config 1	✓	✗	✗	✗	✗	✓
WF8	Config 2	✗	✓	✗	✓	✗	✗
WF8	Config 3	✗	✓	✗	✗	✓	✗
WF8	Config 4	✗	✗	✓	✓	✗	✗
WF8	Config 5	✗	✗	✓	✗	✓	✗
WF7	Config 6	✗	✓	✗	✓	✗	✗
WF7	Config 7	✗	✓	✗	✗	✓	✗
WF7	Config 8	✗	✗	✓	✓	✗	✗
WF7	Config 9	✗	✗	✓	✗	✓	✗
WF7	Config 10	✗	✗	✓	✗	✓	✗

**Table 2-3. Simultaneous Transmission Configurations**

✓ = Support; ✗ = Not Support

**Note:**

All of the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 2 and reported in RF Bluetooth and RF UNII OFDM test reports.

Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode with Wi-Fi (2.4GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2925 IC: 579C-A2925	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 6 of 179

V 10.5 12/15/2021

### 2.3 Antenna Description

The following antenna gains provided by the manufacturer were used for testing.

Frequency [MHz]	Antenna Gain (dBi)		
	Antenna WF5B	Antenna WF8	Antenna WF7
5162 - 5245	1.50	2.30	-2.00
5733 – 5844	1.10	2.20	2.00

**Table 2-4. Highest Antenna Gain**

### 2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141 Model: A2166	S/N: S/N:	C02H604EQ05D C4H042705ZNP0WA6
2	Apple USB-C Cable	Model: Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable w/ AC Adapter	Model: A246C Model: A2305	S/N: S/N:	DWH80115BK826GV19 C4H95160004PF4F4V
4	Apple Pencil	Model: A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model: KPS3010D	S/N:	N/A

**Table 2-5. Test Support Equipment List**

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 7 of 179

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 0, 7.4 and 7.4 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configurations were investigated and EUT powered by AC/DC adaptor was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

## 2.6 Software and Firmware

The test was conducted with firmware version 21E8197 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

<b>FCC ID:</b> BCGA2925 <b>IC:</b> 579C-A2925	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 8 of 179



## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 9 of 179

V 10.5 12/15/2021

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

<b>FCC ID:</b> BCGA2925 <b>IC:</b> 579C-A2925	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 10 of 179

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The EUT complies with the requirement of §15.203.

<b>FCC ID:</b> BCGA2925 <b>IC:</b> 579C-A2925	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 11 of 179

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 12 of 179

V 10.5 12/15/2021

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/10/2023	Annual	3/10/2024	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	6/8/2023	Annual	6/8/2024	192052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

**Table 6-1. Test Equipment List**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2925 IC: 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 13 of 179

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2925  
 FCC Classification: Unlicensed National Information Infrastructure (UNII)  
 IC: 579C-A2925

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 0
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2, 0
15.407 (a.1.iv), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.3
15.407 (a.1.iv), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407(b.1), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.5
15.205, 15.407(b.1), (4)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.5, 7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	AC LINE CONDUCTED	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “UNII Automation,” Version 7.0.
- For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.0.

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 14 of 179

## 7.2 26dB & 99% Bandwidth Measurement – HDR

§2.1049; §15.407; RSS-Gen [6.7]

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

***The 26dB bandwidth is used to determine the conducted power limits.***

### Test Procedure Used

ANSI C63.10-2013 – Subclause 12.4  
KDB 789033 D02 v02r01 – Section C

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

All antenna configurations and power schemes were investigated and only the worst case is reported.


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 15 of 179

V 10.5 12/15/2021

## 7.2.1 Antenna WF5B 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5162	4.0	HDR4	ePA	2.3400	2.7886
	5204	4.0	HDR4	ePA	2.3385	2.7887
	5245	4.0	HDR4	ePA	2.3396	2.7869
	5162	8.0	HDR8	ePA	4.8531	5.6886
	5204	8.0	HDR8	ePA	4.8519	5.6942
	5245	8.0	HDR8	ePA	4.8522	5.6774


Table 7-2. Conducted BW Measurements Antenna WF5B

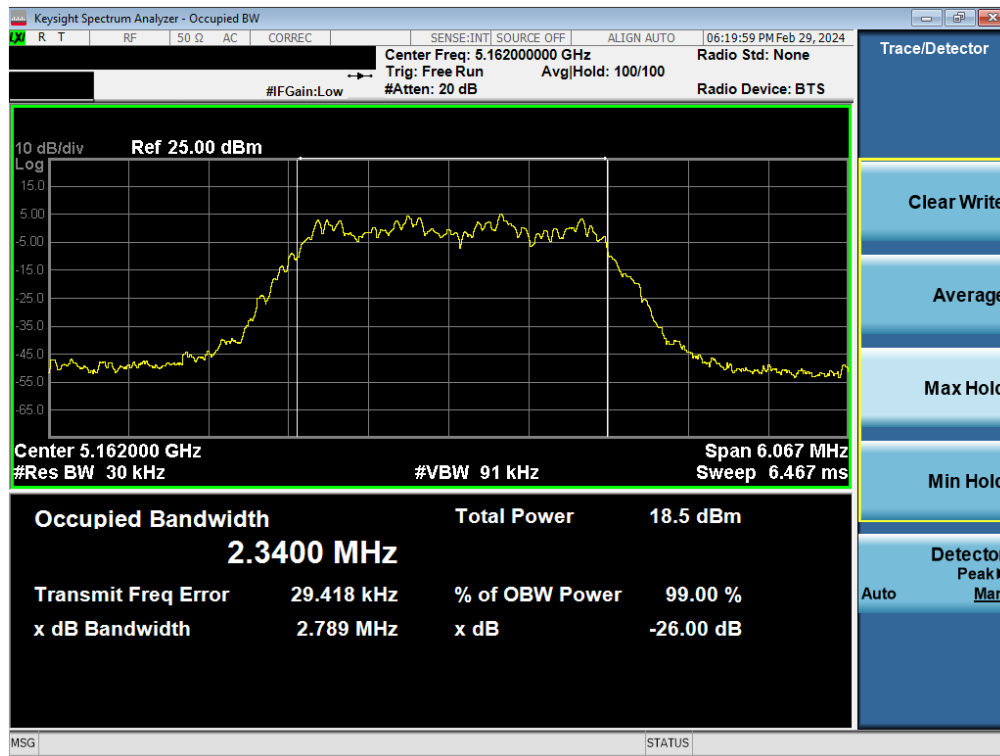


Plot 7-1. 26dB BW & 99% OBW Antenna WF5B (HDR4, ePA– 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 16 of 179



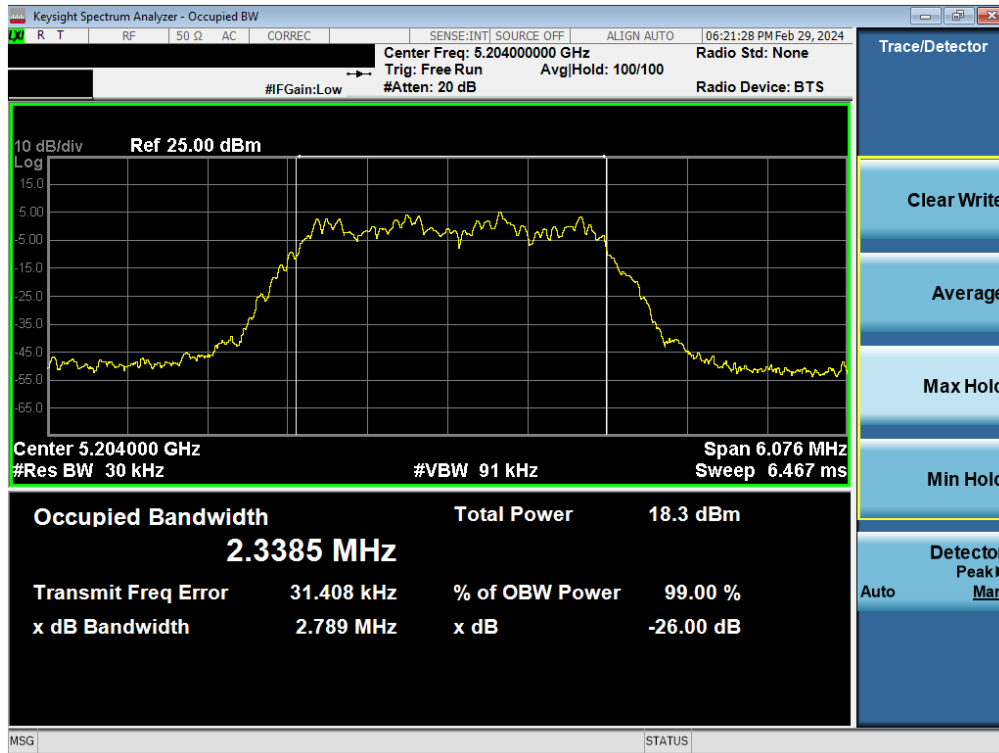


Plot 7-2. 26dB BW & 99% OBW Antenna WF5B (HDR4, ePA– 5204MHz)

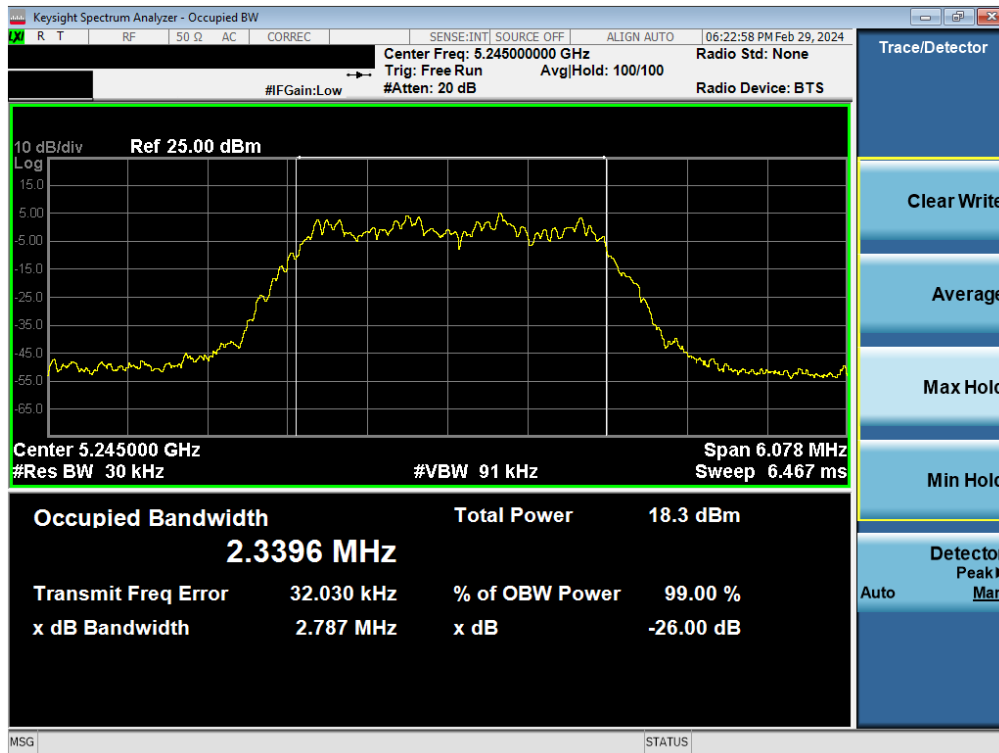


Plot 7-3. 26dB BW & 99% OBW Antenna WF5B (HDR4, ePA – 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 17 of 179

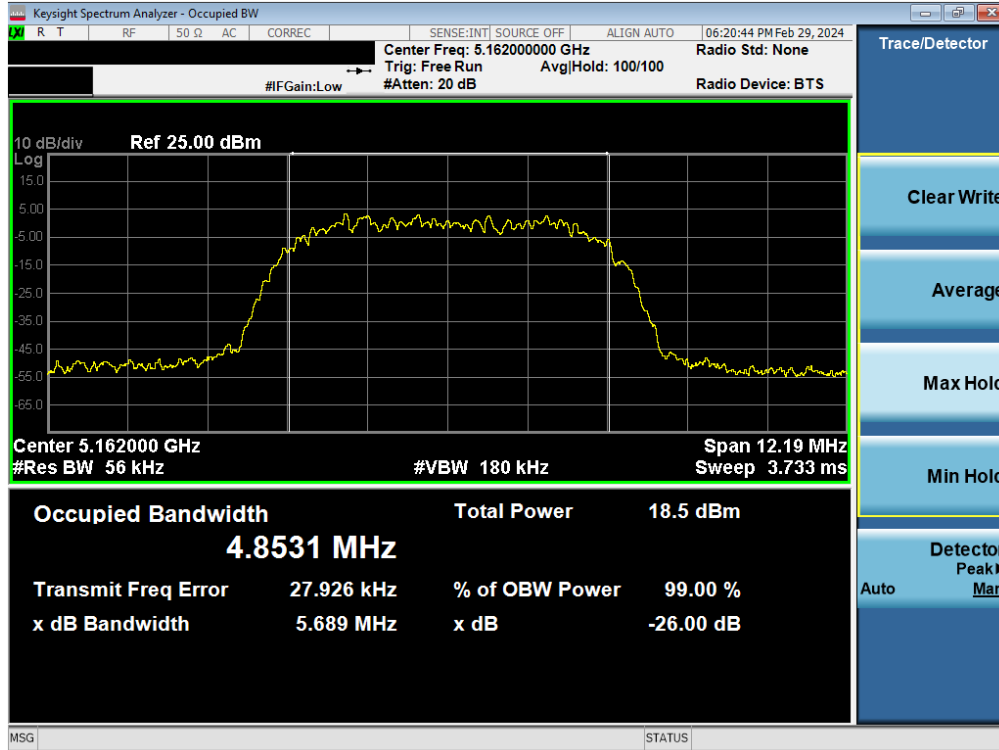


Plot 7-4. 26dB BW & 99% OBW Antenna WF5B (HDR8, ePA– 5162MHz)

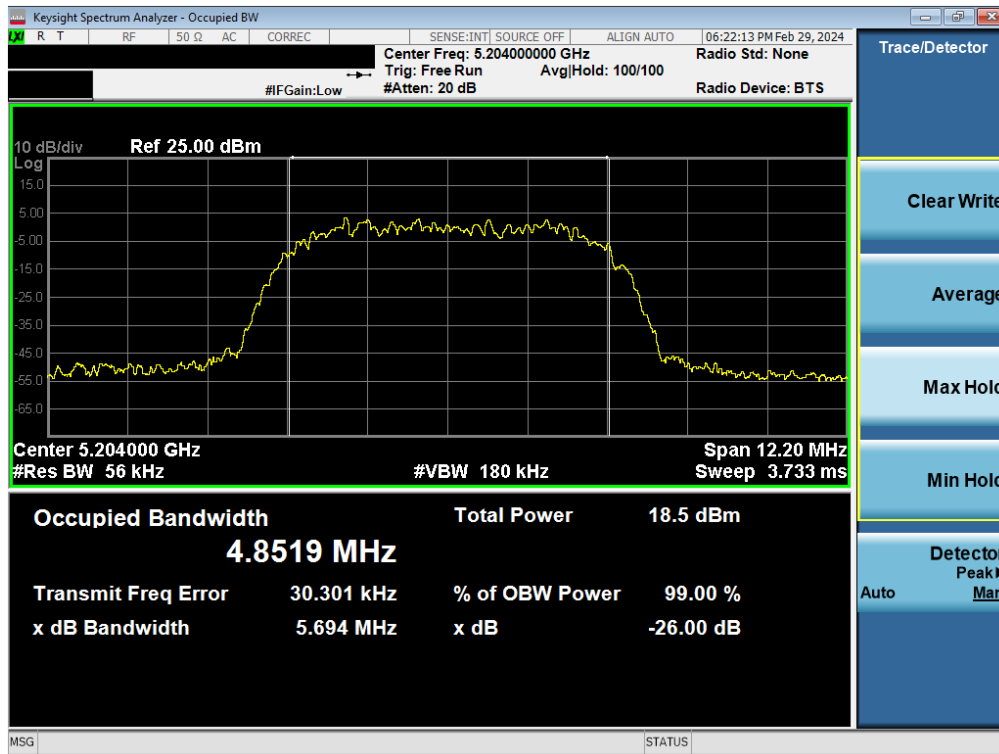

Plot 7-5. 26dB BW & 99% OBW Antenna WF5B (HDR8, ePA– 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 18 of 179

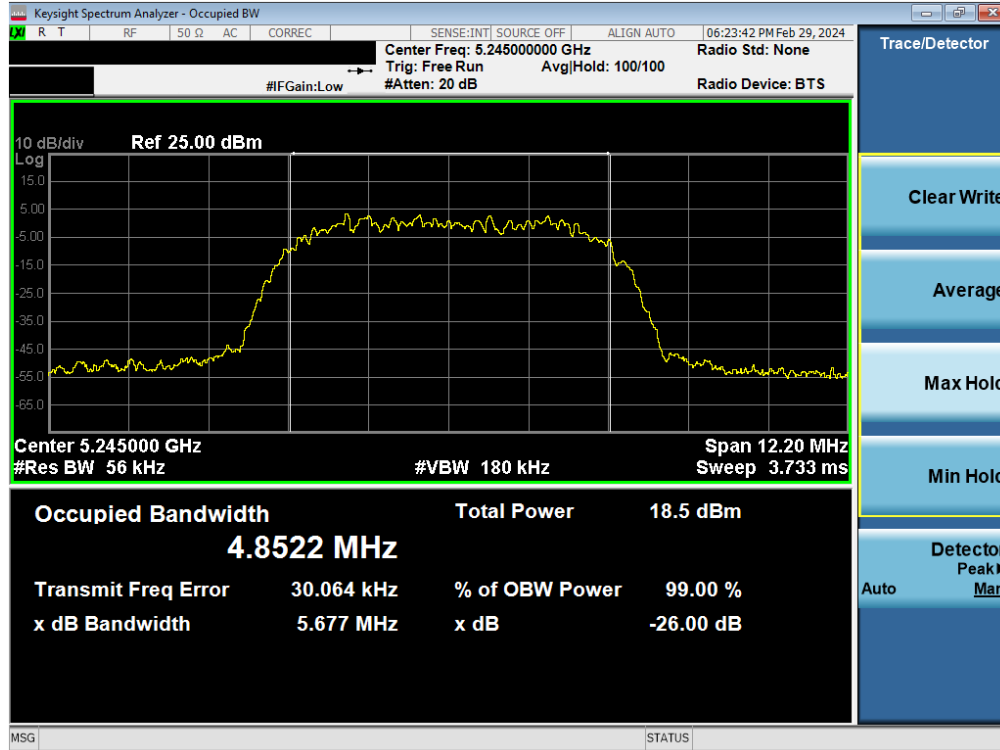


Plot 7-6. 26dB BW & 99% OBW Antenna WF5B (HDR8, ePA – 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 19 of 179

## 7.2.2 Antenna WF8 26dB & 99% Bandwidth Measurements


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5162	4.0	HDR4	ePA	2.3393	2.7875
	5204	4.0	HDR4	ePA	2.3389	2.7891
	5245	4.0	HDR4	ePA	2.3399	2.7893
	5162	8.0	HDR8	ePA	4.8501	5.6966
	5204	8.0	HDR8	ePA	4.8517	5.6865
	5245	8.0	HDR8	ePA	4.8516	5.6883

Table 7-3. Conducted BW Measurements Antenna WF8

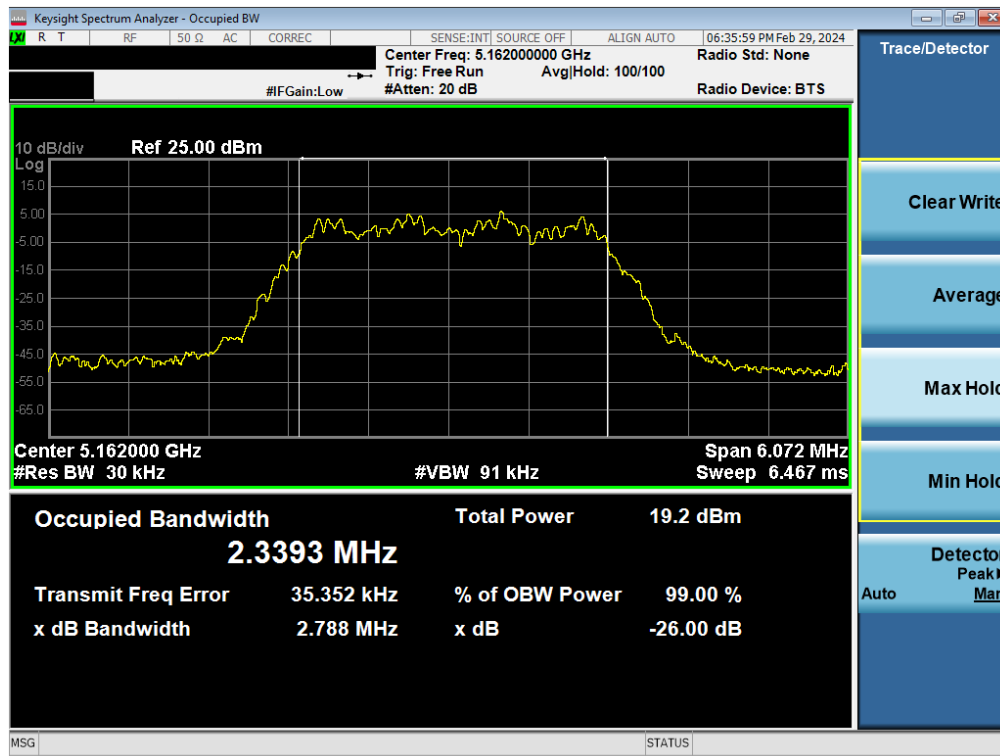


Plot 7-7. 26dB BW & 99% OBW Antenna WF8 (HDR4, ePA– 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 20 of 179

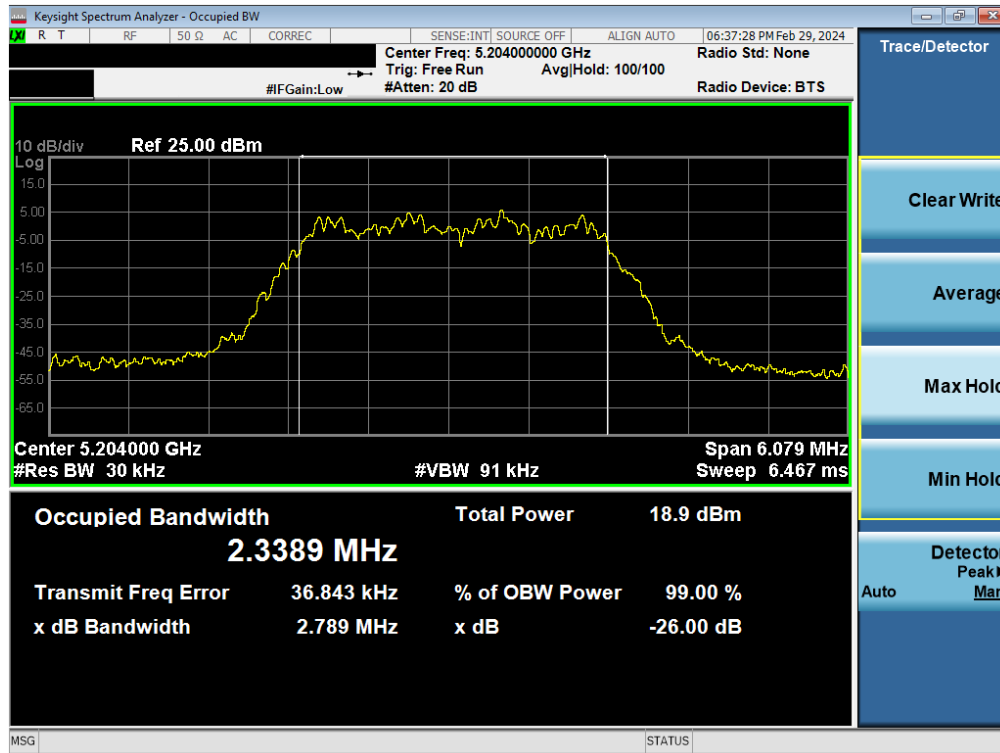


Plot 7-8. 26dB BW & 99% OBW Antenna WF8 (HDR4, ePA- 5204MHz)

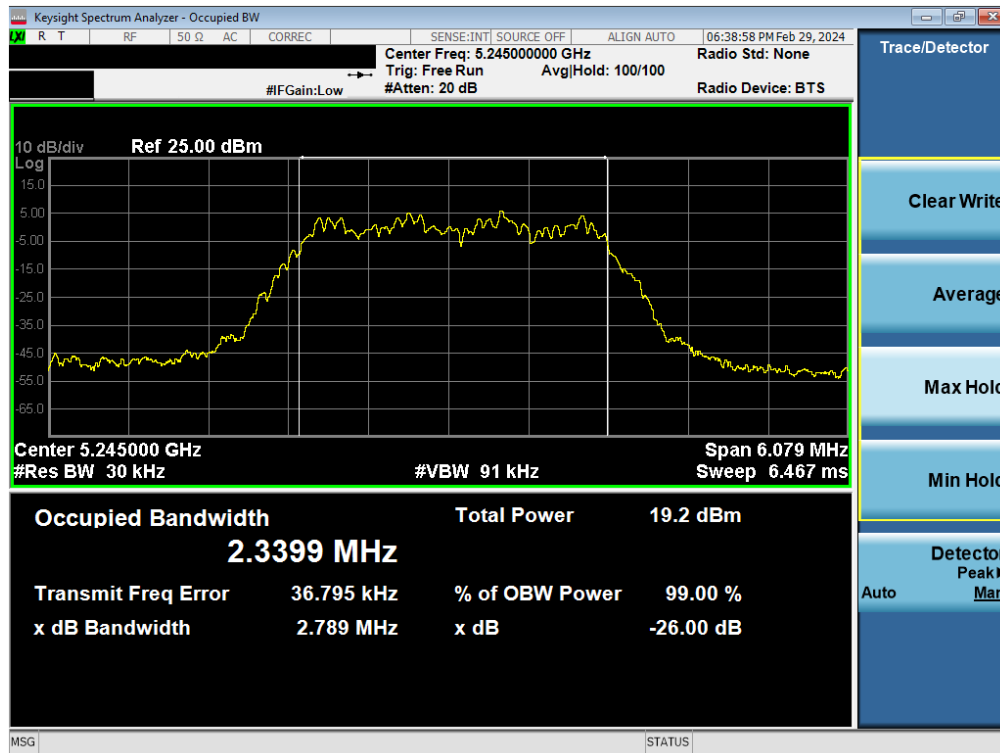


Plot 7-9. 26dB BW & 99% OBW Antenna WF8 (HDR4, ePA- 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 21 of 179

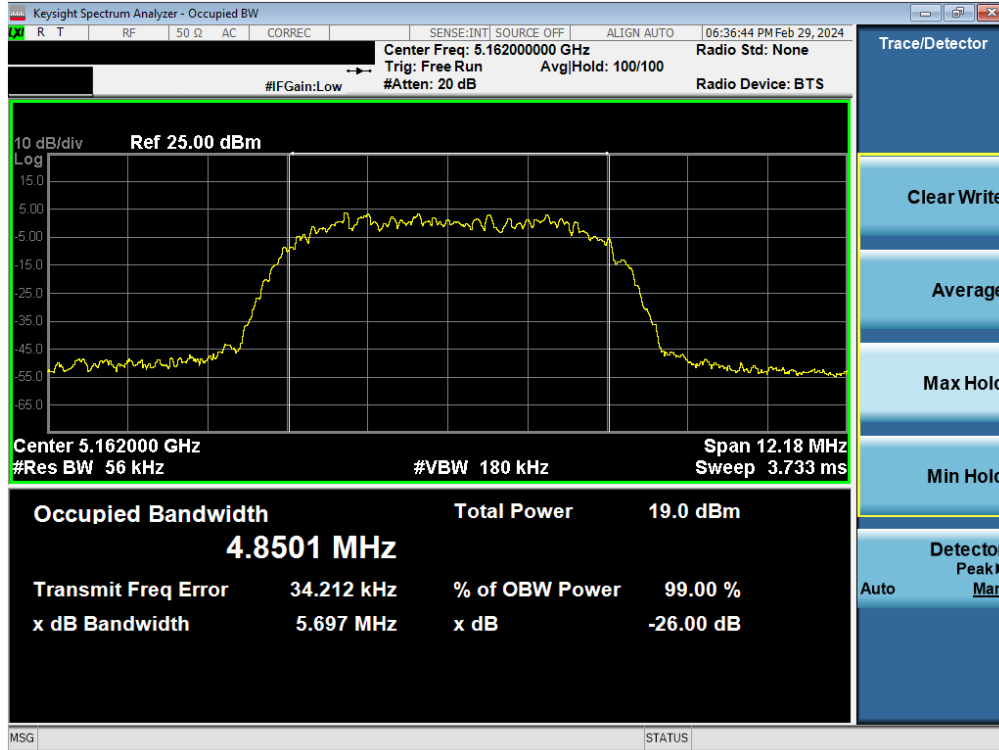


Plot 7-10. 26dB BW & 99% OBW Antenna WF8 (HDR8, ePA- 5162MHz)

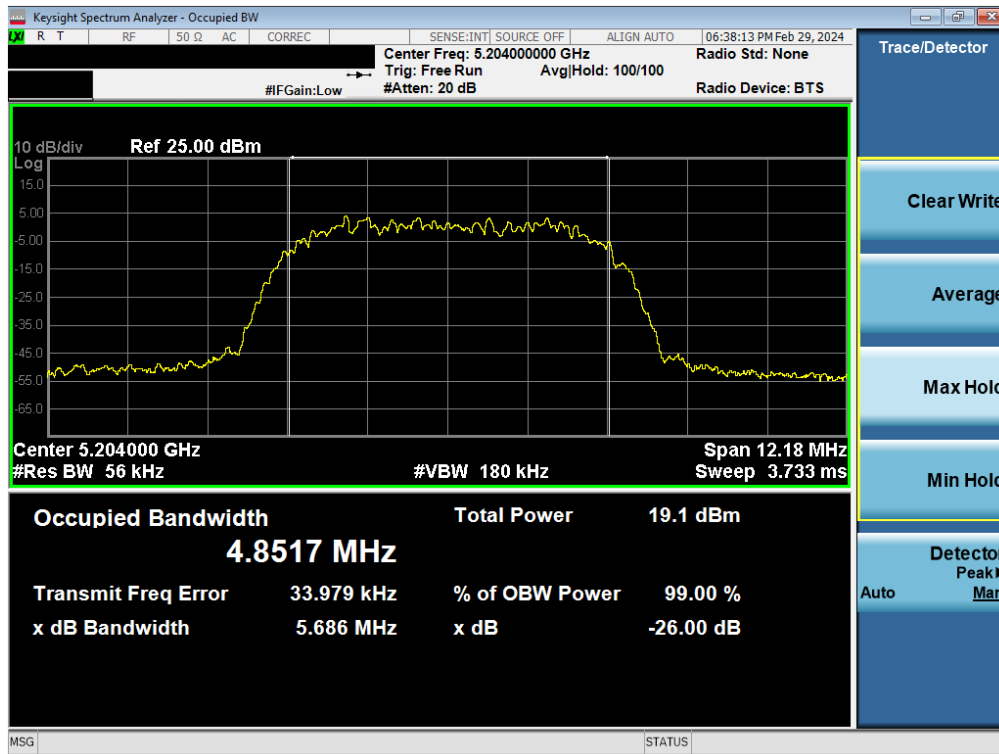

Plot 7-11. 26dB BW & 99% OBW Antenna WF8 (HDR8, ePA- 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 22 of 179

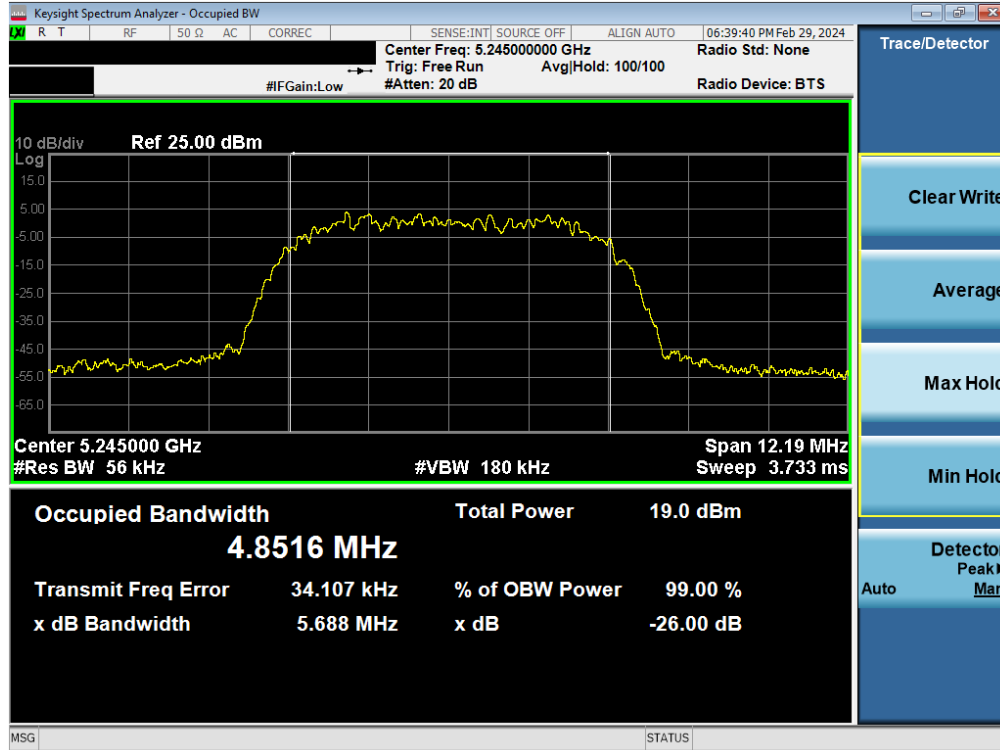


Plot 7-12. 26dB BW & 99% OBW Antenna WF8 (HDR8, ePA- 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 23 of 179

### 7.2.3 Antenna WF7 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]
Band 1	5162	4.0	HDR4	ePA	2.3387	2.7888
	5204	4.0	HDR4	ePA	2.3392	2.7908
	5245	4.0	HDR4	ePA	2.3387	2.7881
	5162	8.0	HDR8	ePA	4.8506	5.6738
	5204	8.0	HDR8	ePA	4.8512	5.6945
	5245	8.0	HDR8	ePA	4.8523	5.6721


Table 7-4. Conducted BW Measurements Antenna WF7

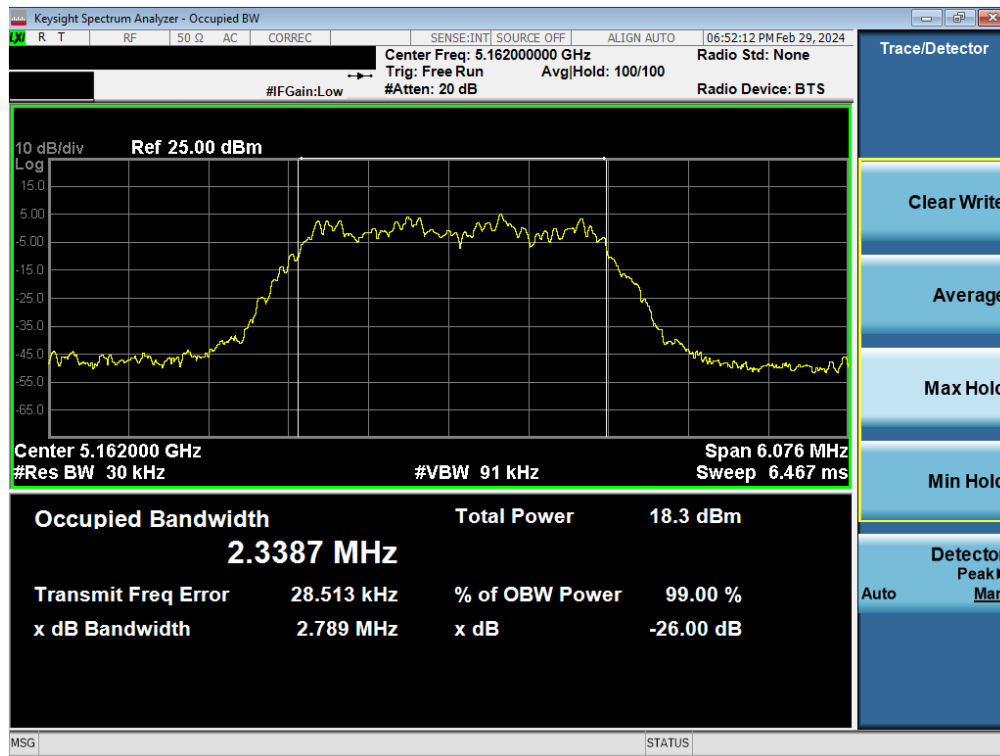


Plot 7-13. 26dB BW & 99% OBW Antenna WF7 (HDR4, ePA- 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 24 of 179



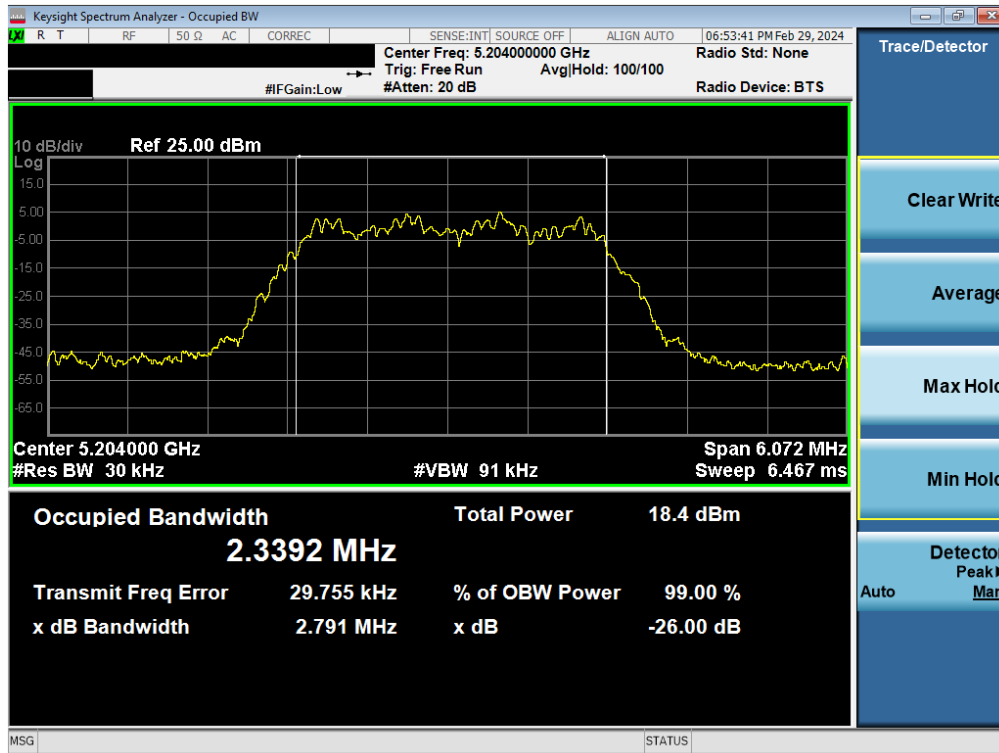


Plot 7-14. 26dB BW & 99% OBW Antenna WF7 (HDR4, ePA– 5204MHz)

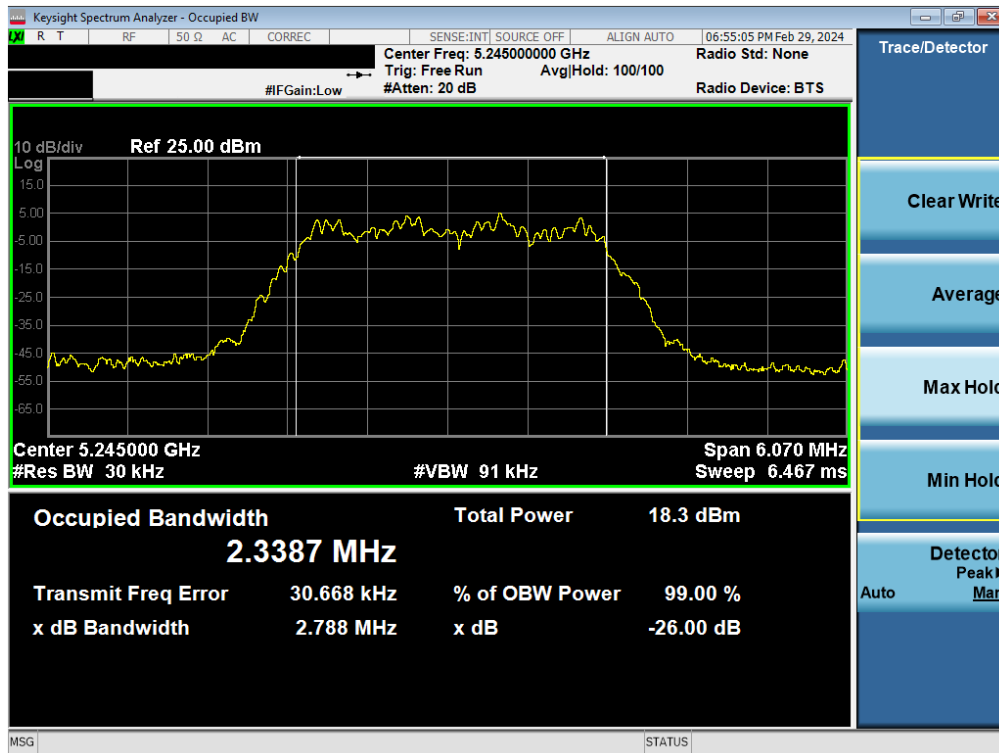


Plot 7-15. 26dB BW & 99% OBW Antenna WF7 (HDR4, ePA– 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 25 of 179

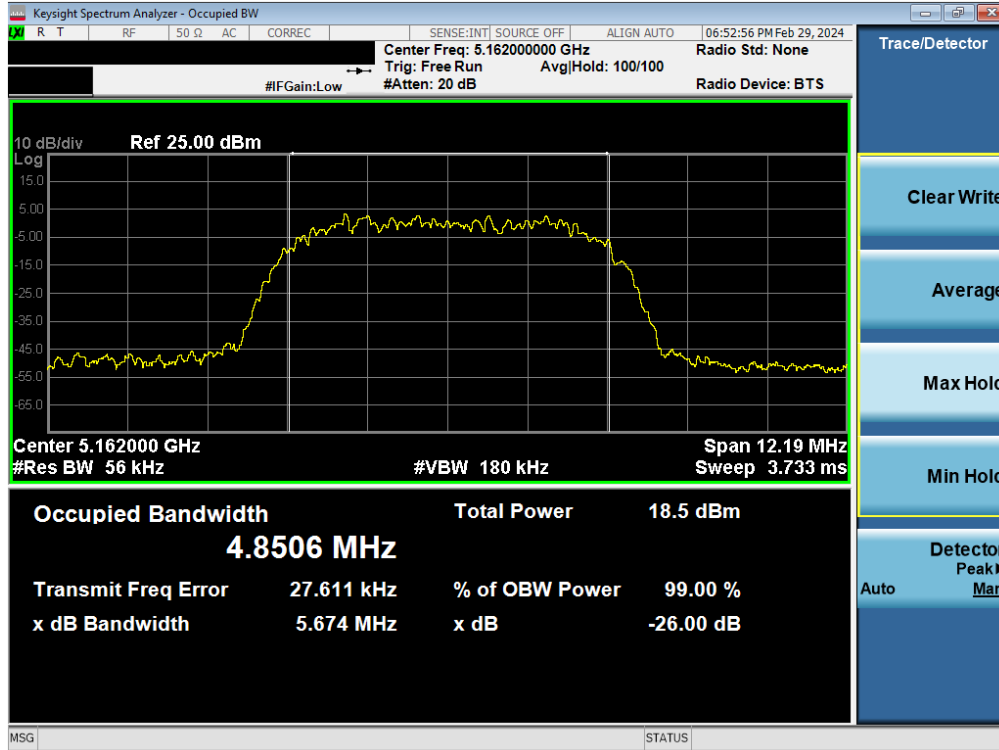


Plot 7-16. 26dB BW & 99% OBW Antenna WF7 (HDR8, ePA- 5162MHz)

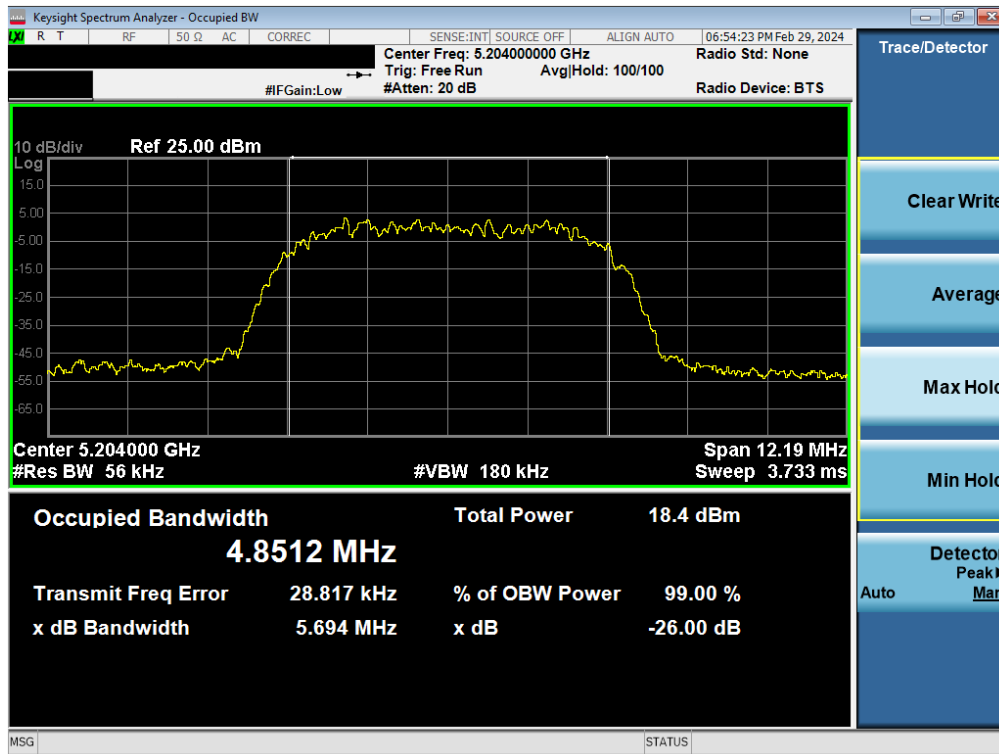

Plot 7-17. 26dB BW & 99% OBW Antenna WF7 (HDR8, ePA- 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 26 of 179

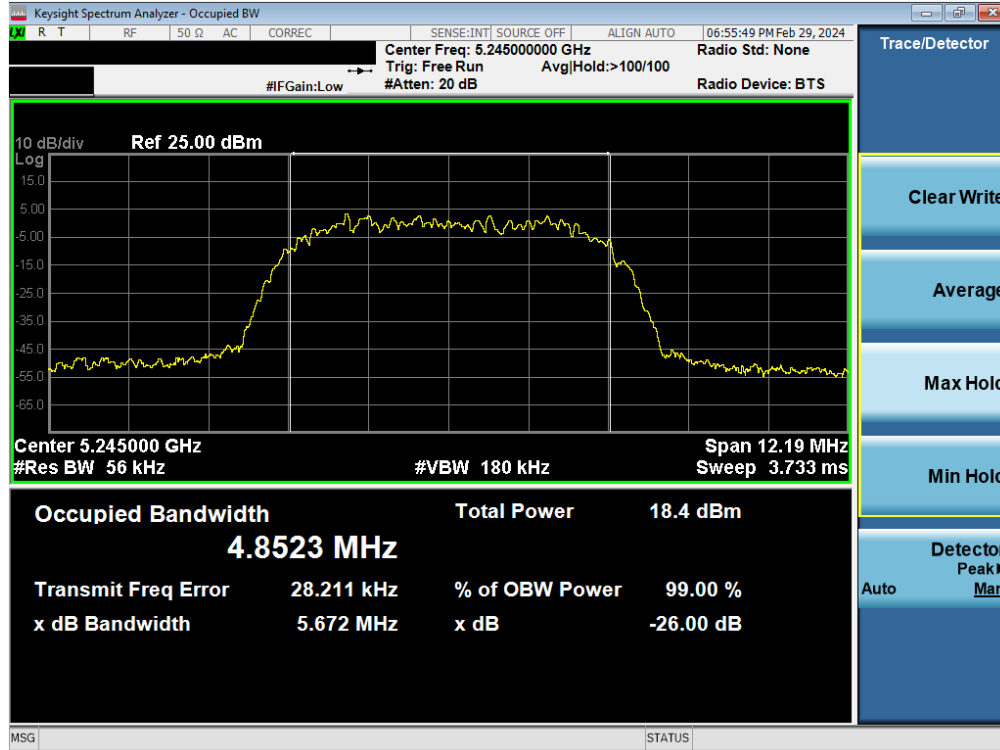

Plot 7-18. 26dB BW & 99% OBW Antenna WF7 (HDR8, ePA- 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 27 of 179

**6dB & 99% Bandwidth Measurement – HDR**  
**§2.1049; §15.407 (e); RSS-Gen [6.7]**

**Test Overview and Limit**

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer’s bandwidth measurement function is configured to measure the 6dB bandwidth.

***In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq$  500 kHz.***

**Test Procedure Used**

ANSI C63.10-2013 – Subclause 6.9.2  
 KDB 789033 D02 v02r01 – Section C

**Test Settings**

1. The signal analyzers’ automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The “X” dB bandwidth parameter was set to  $X = 6$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

**Test Notes**


All antenna configurations and power schemes were investigated and only the worst case is reported.

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 28 of 179

## 7.2.4 Antenna WF5B 6dB & 99% Bandwidth Measurements


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
<b>Band 3</b>	5733	4.0	HDR4	ePA	2.3690	2.1589	0.50	Pass
	5789	4.0	HDR4	ePA	2.3682	2.1584	0.50	Pass
	5844	4.0	HDR4	ePA	2.3687	2.1636	0.50	Pass
	5733	8.0	HDR8	ePA	4.8548	4.1824	0.50	Pass
	5789	8.0	HDR8	ePA	4.8559	4.1802	0.50	Pass
	5844	8.0	HDR8	ePA	4.8551	4.1809	0.50	Pass

**Table 7-5. Conducted BW Measurements Antenna WF5B**

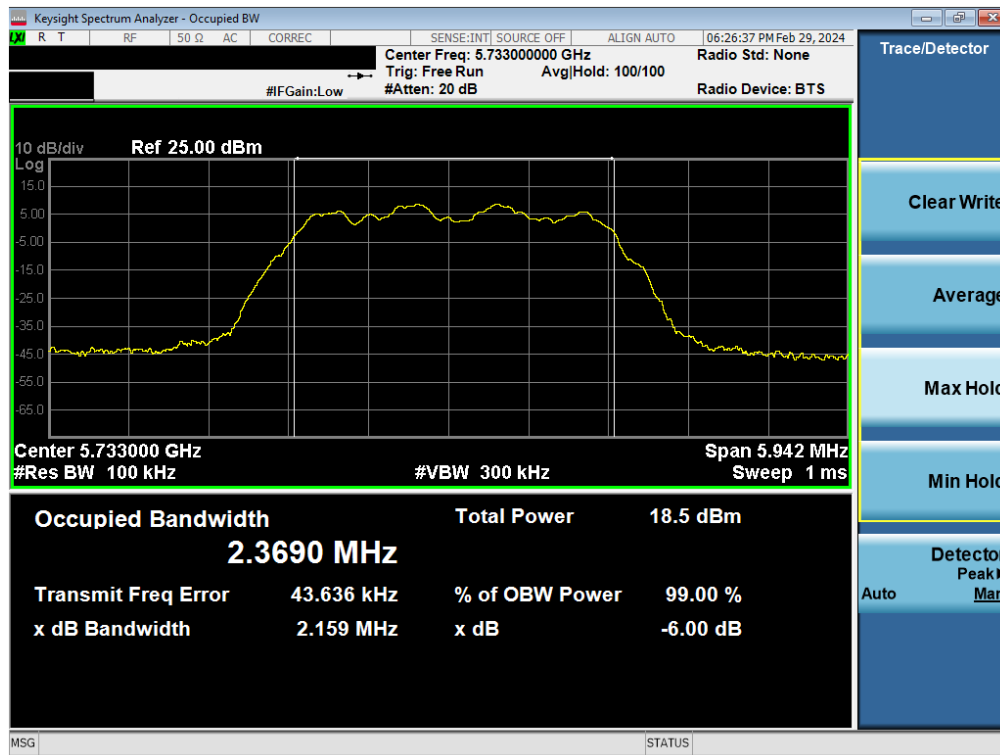


**Plot 7-19. 6dB BW & 99% OBW Antenna WF5B (HDR4, ePA, 5733MHz)**

FCC ID: BCGA2925 IC: 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 29 of 179

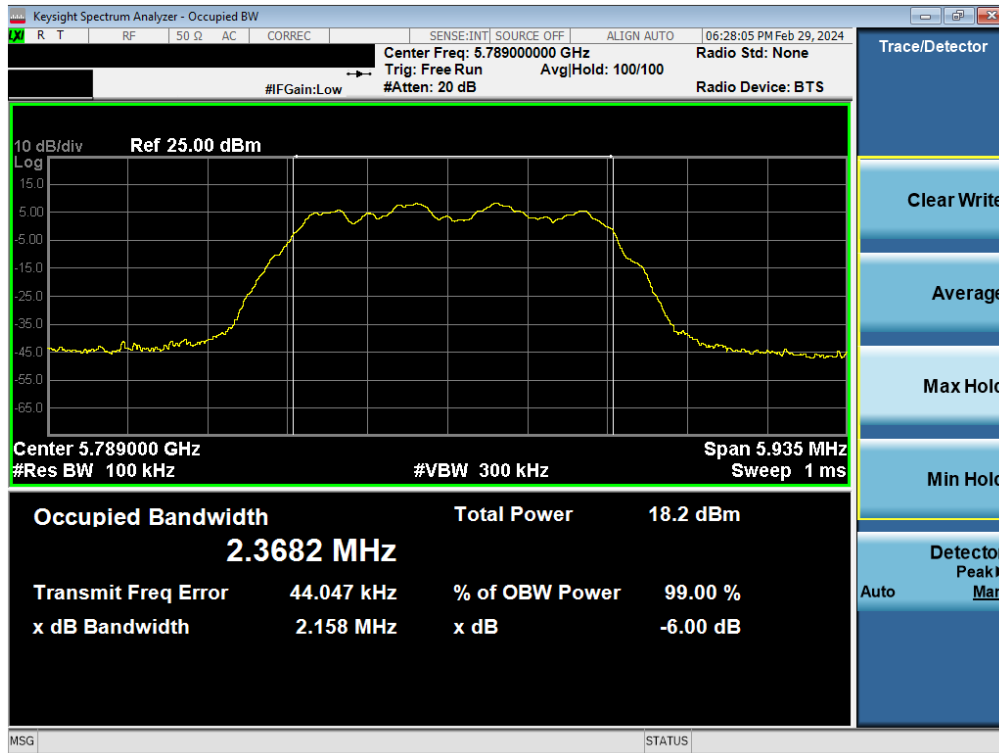


Plot 7-20. 6dB BW & 99% OBW Antenna WF5B (HDR4, ePA, 5789MHz)

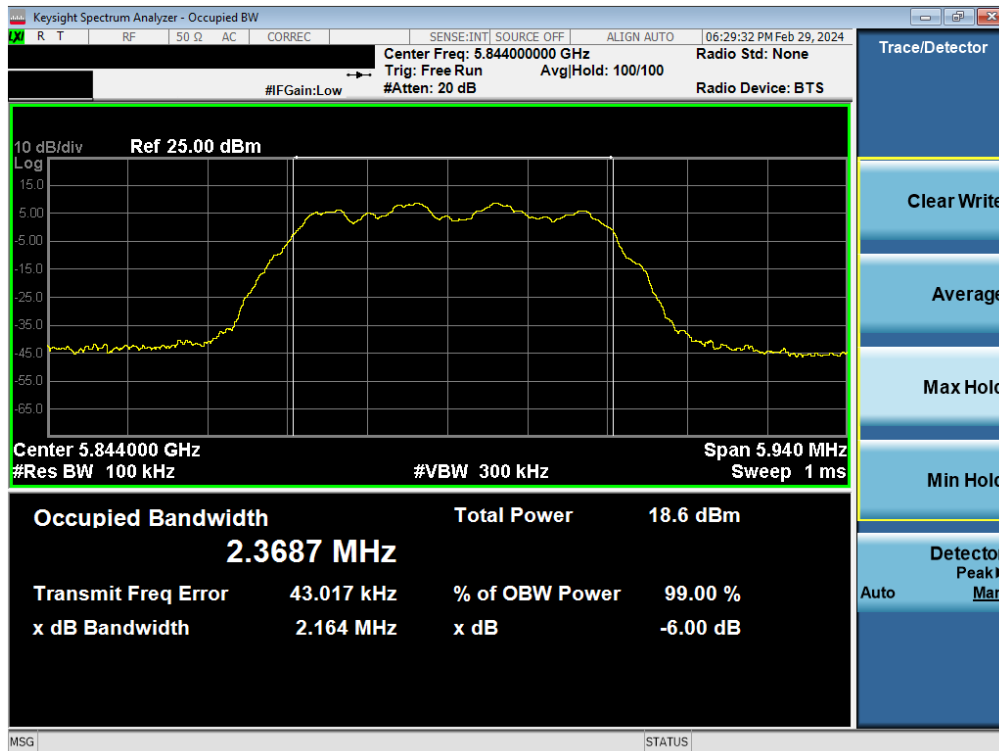


Plot 7-21. 6dB BW & 99% OBW Antenna WF5B (HDR4, ePA, 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 30 of 179

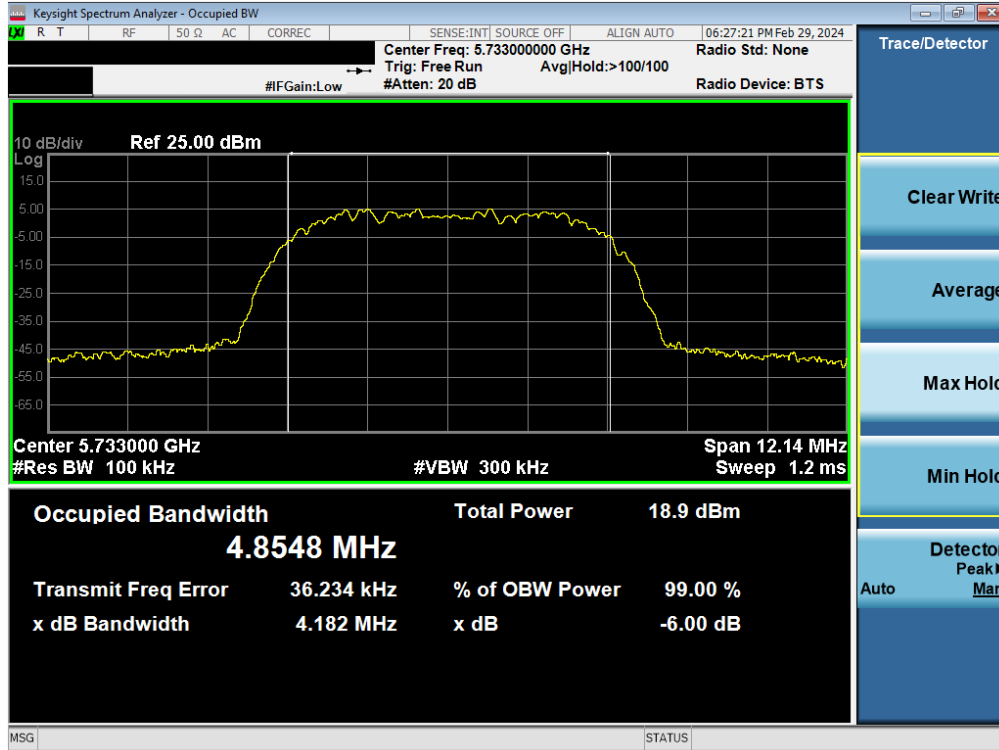


Plot 7-22. 6dB BW & 99% OBW Antenna WF5B (HDR8, ePA, 5733MHz)

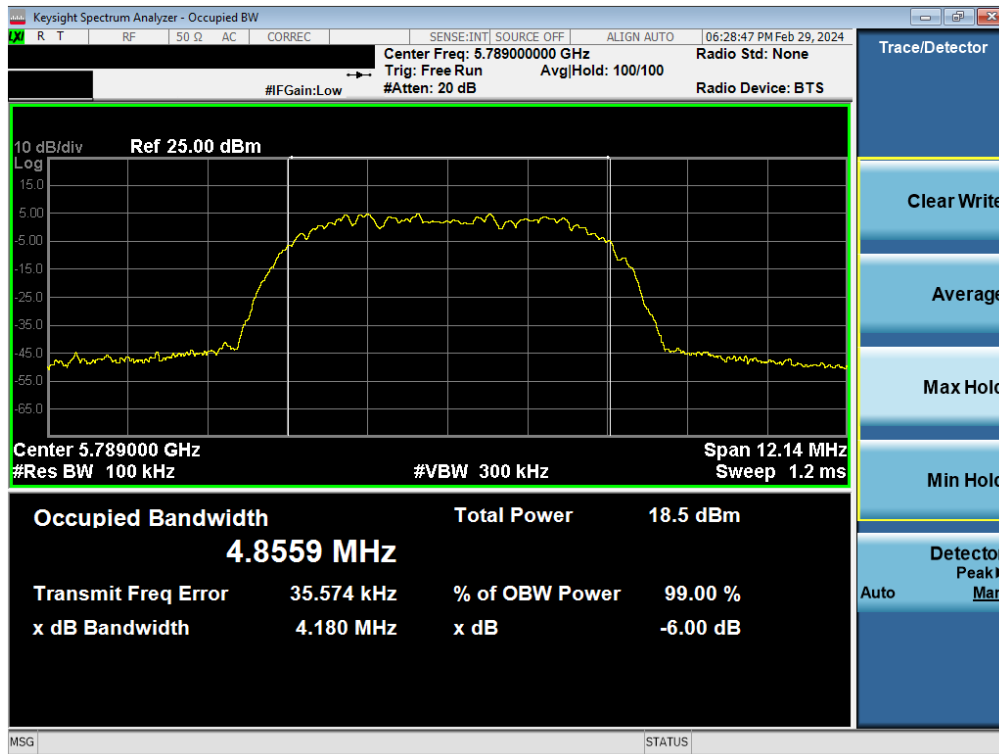

Plot 7-23. 6dB BW & 99% OBW Antenna WF5B (HDR8, ePA, 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 31 of 179

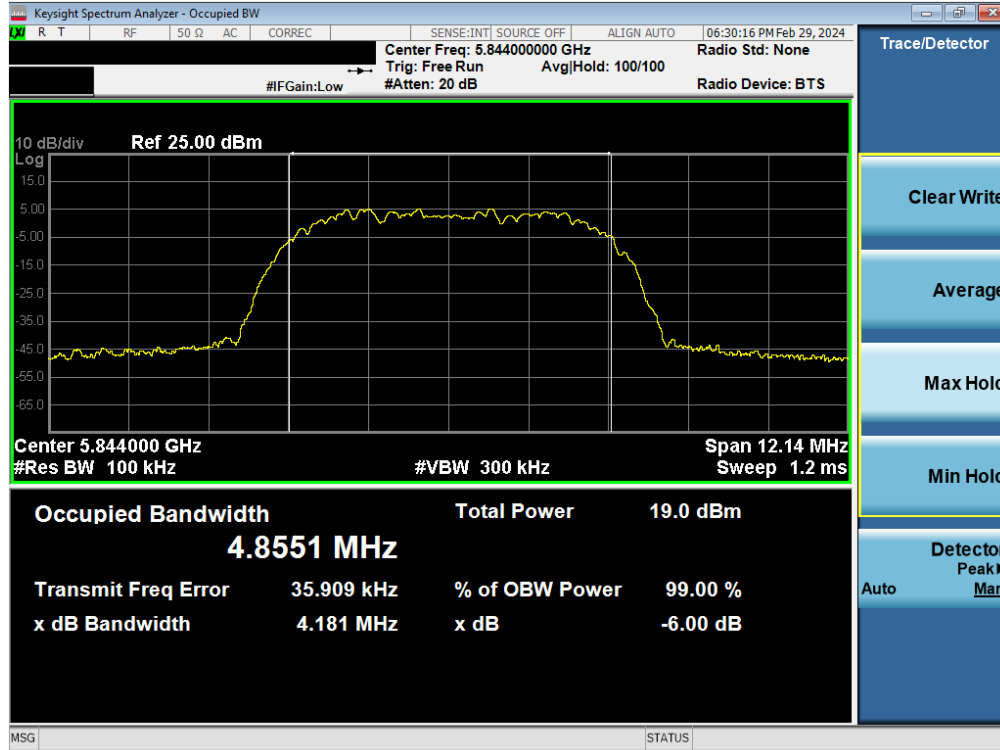

Plot 7-24. 6dB BW & 99% OBW Antenna WF5B (HDR8, ePA, 5844MHz)


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 32 of 179



## 7.2.5 Antenna WF8 6dB & 99% Bandwidth Measurements


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
<b>Band 3</b>	5733	4.0	HDR4	ePA	2.3688	2.1617	0.50	Pass
	5789	4.0	HDR4	ePA	2.3680	2.1568	0.50	Pass
	5844	4.0	HDR4	ePA	2.3675	2.1618	0.50	Pass
	5733	8.0	HDR8	ePA	4.8532	4.1817	0.50	Pass
	5789	8.0	HDR8	ePA	4.8529	4.1834	0.50	Pass
	5844	8.0	HDR8	ePA	4.8537	4.1803	0.50	Pass

**Table 7-6. Conducted BW Measurements Antenna WF8**

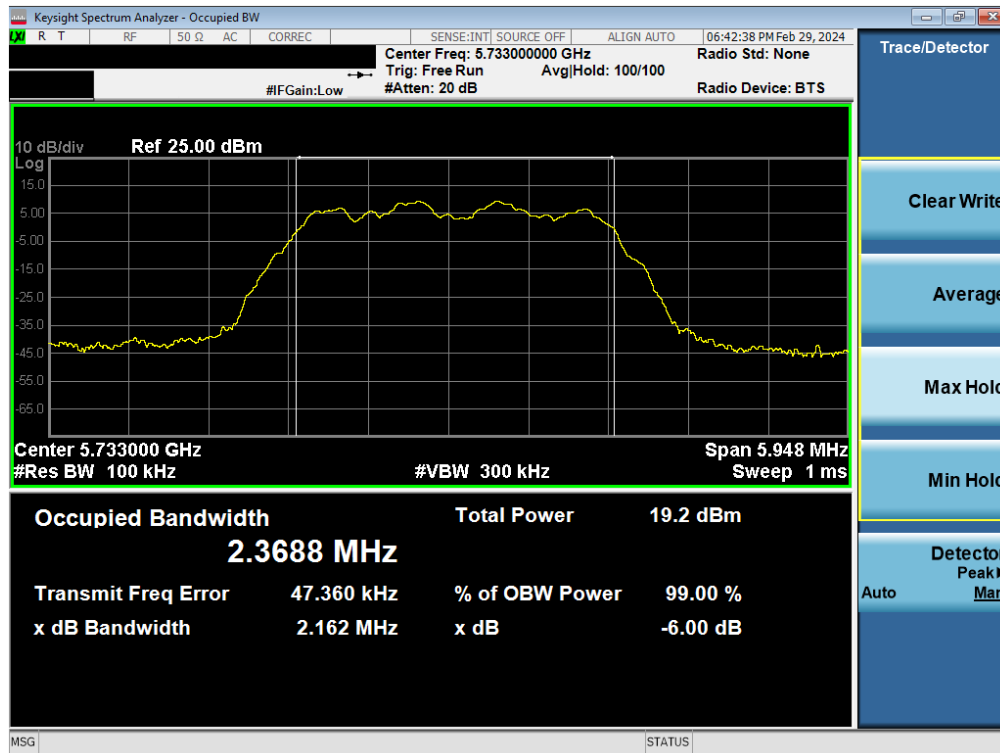


**Plot 7-25. 6dB BW & 99% OBW Antenna WF8 (HDR4, ePA, 5733MHz)**

FCC ID: BCGA2925 IC: 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 33 of 179

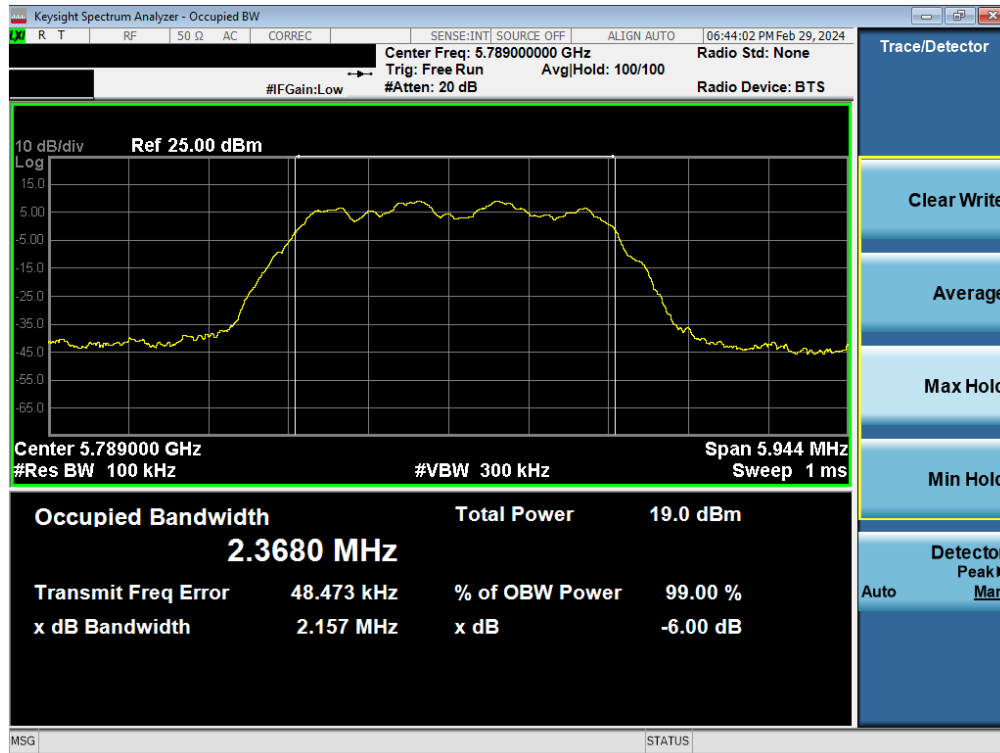


Plot 7-26. 6dB BW & 99% OBW Antenna WF8 (HDR4, ePA, 5789MHz)

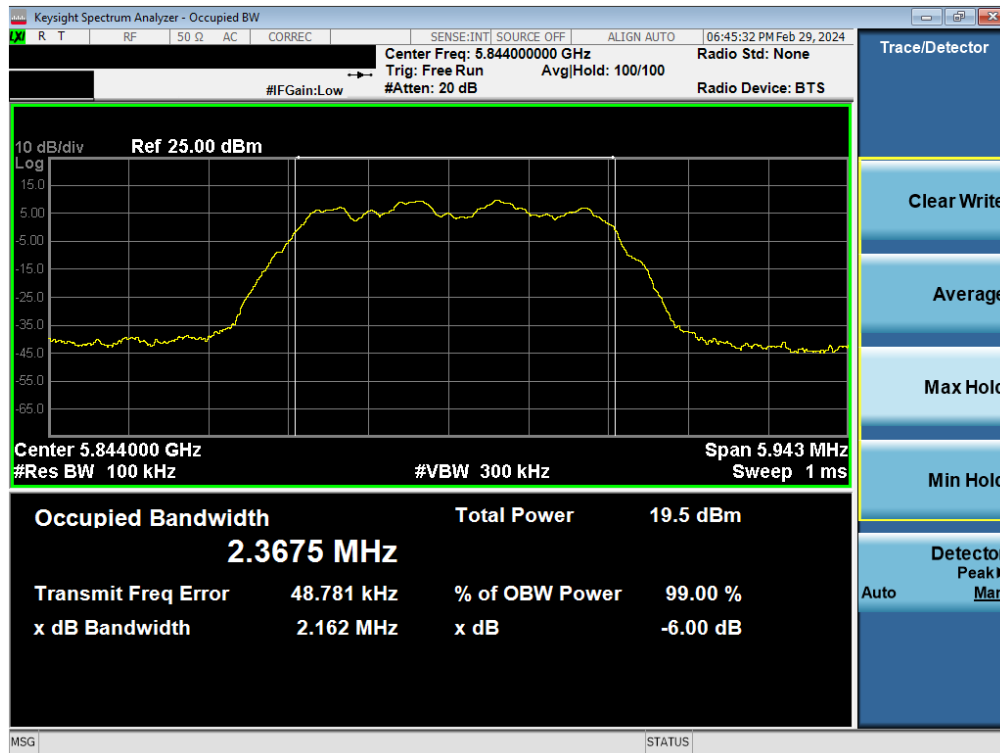


Plot 7-27. 6dB BW & 99% OBW Antenna WF8 (HDR4, ePA, 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 34 of 179

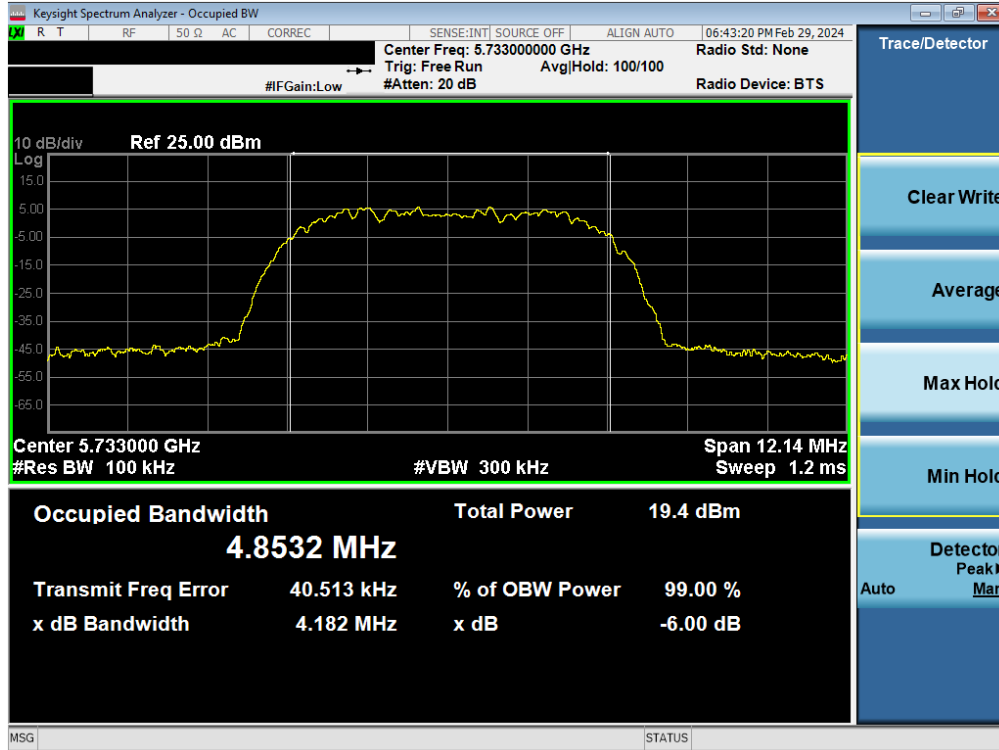

Plot 7-28. 6dB BW & 99% OBW Antenna WF8 (HDR8, ePA, 5733MHz)

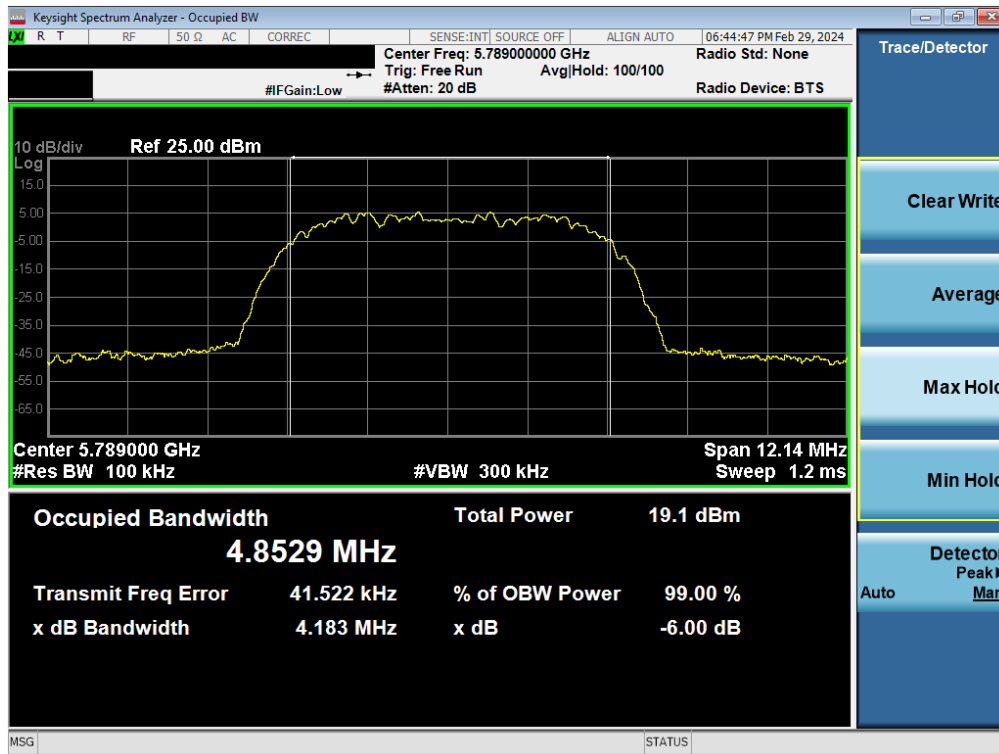

Plot 7-29. 6dB BW & 99% OBW Antenna WF8 (HDR8, ePA, 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 35 of 179




Plot 7-30. 6dB BW & 99% OBW Antenna WF8 (HDR8, ePA, 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 36 of 179

## 7.2.6 Antenna WF7 6dB & 99% Bandwidth Measurements


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
<b>Band 3</b>	5733	4.0	HDR4	ePA	2.3682	2.1580	0.50	Pass
	5789	4.0	HDR4	ePA	2.3686	2.1568	0.50	Pass
	5844	4.0	HDR4	ePA	2.3686	2.1625	0.50	Pass
	5733	8.0	HDR8	ePA	4.8552	4.1808	0.50	Pass
	5789	8.0	HDR8	ePA	4.8556	4.1838	0.50	Pass
	5844	8.0	HDR8	ePA	4.8539	4.1843	0.50	Pass

Table 7-7. Conducted BW Measurements Antenna WF7

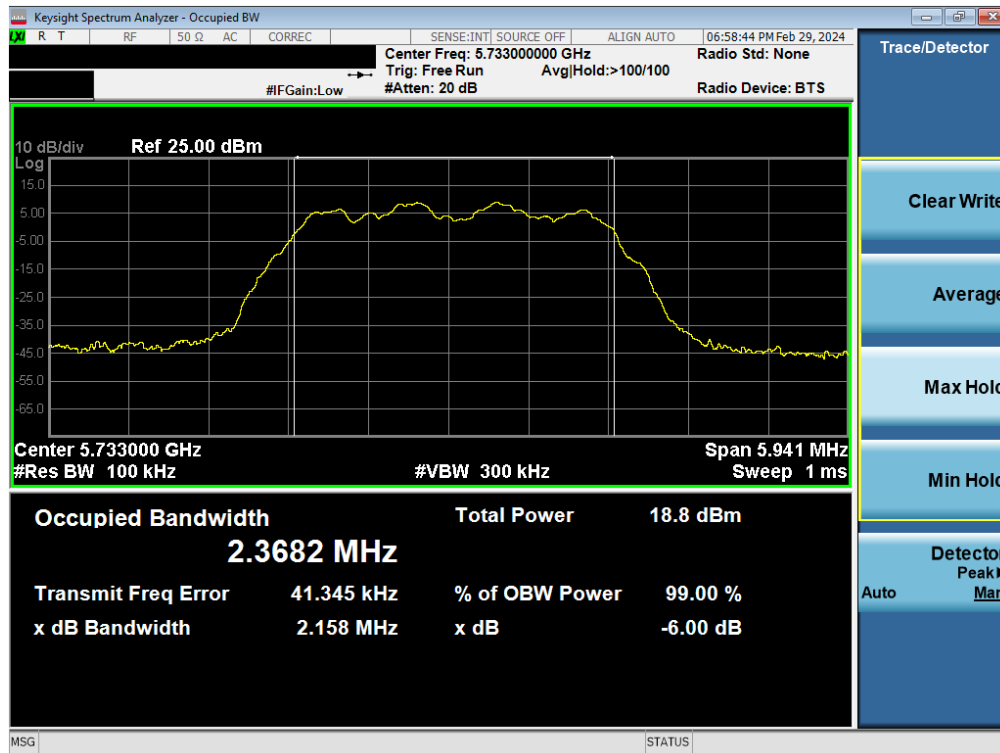


Plot 7-31. 6dB BW & 99% OBW Antenna WF7 (HDR4, ePA, 5733MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 37 of 179

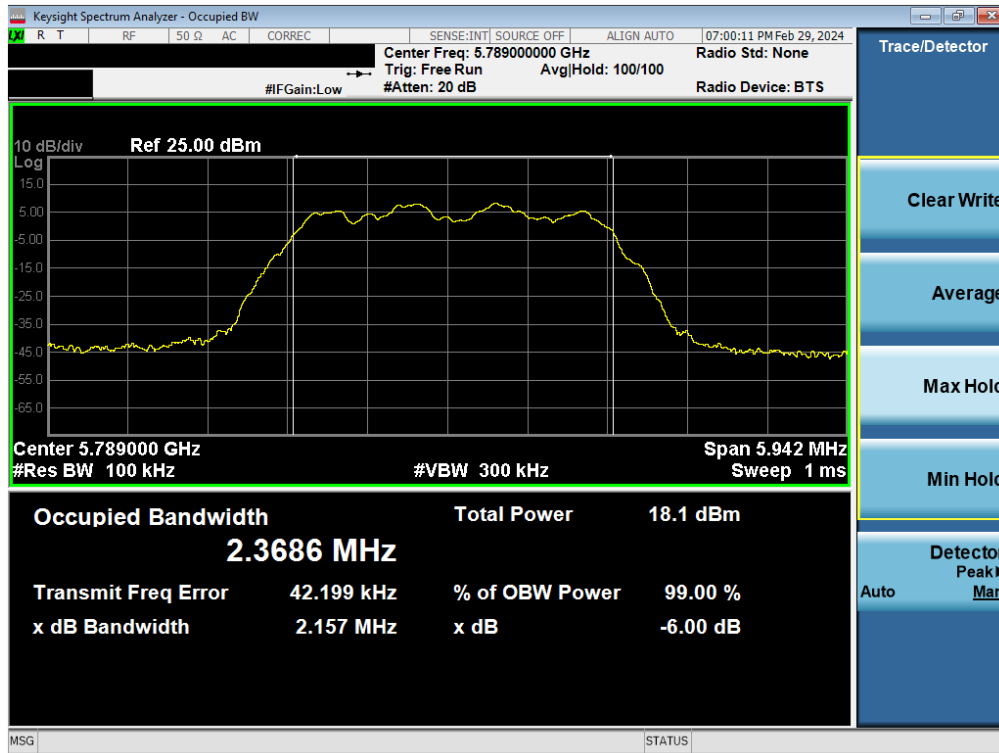


Plot 7-32. 6dB BW & 99% OBW Antenna WF7 (HDR4, ePA, 5789MHz)

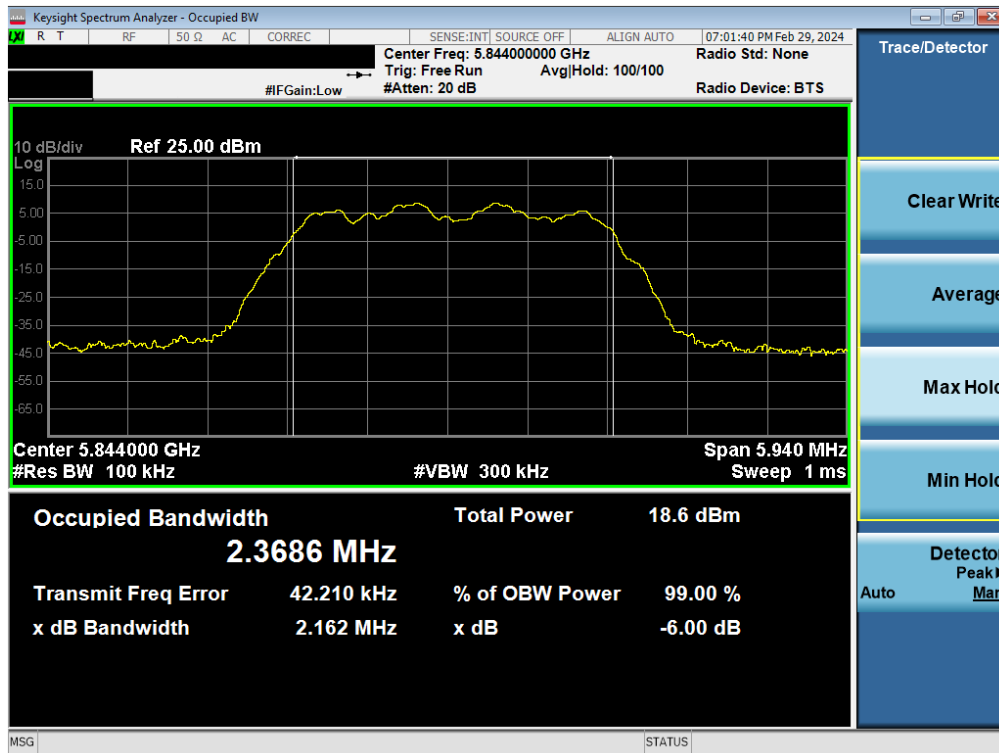


Plot 7-33. 6dB BW & 99% OBW Antenna WF7 (HDR4, ePA, 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 38 of 179

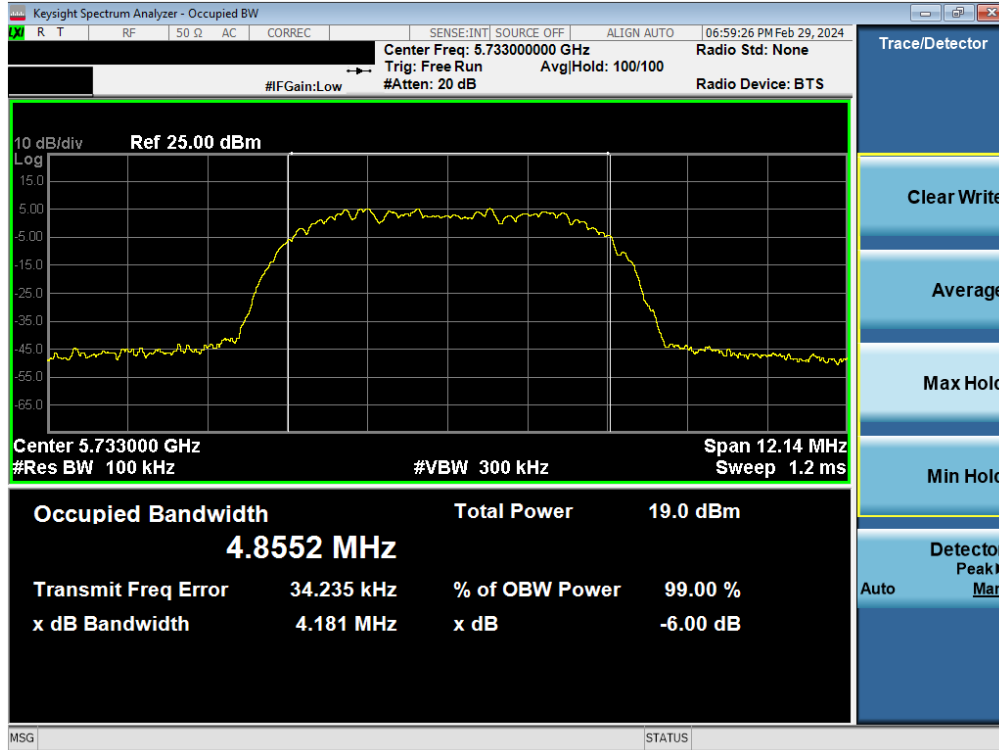


Plot 7-34. 6dB BW & 99% OBW Antenna WF7 (HDR8, ePA, 5733MHz)

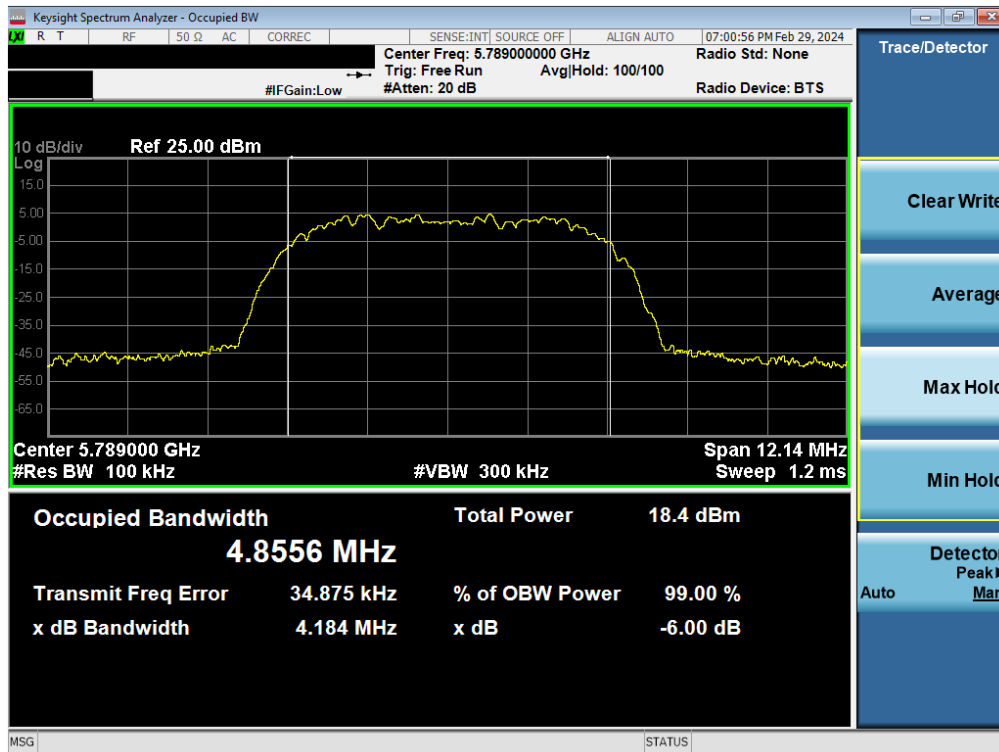

Plot 7-35. 6dB BW & 99% OBW Antenna WF7 (HDR8, ePA, 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 39 of 179

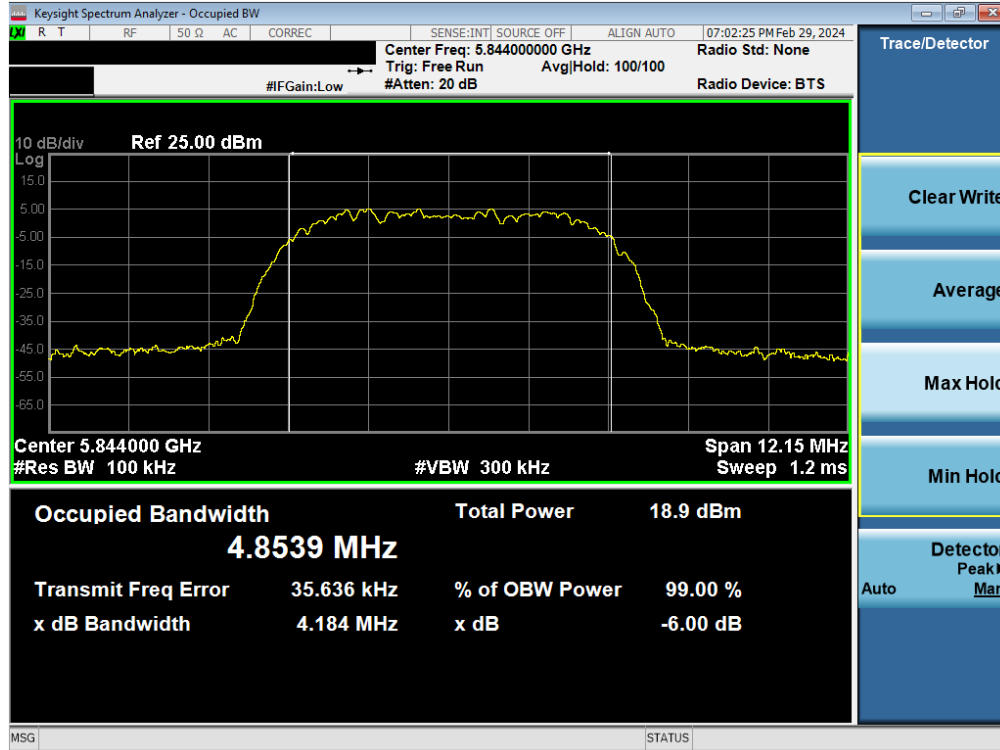

Plot 7-36. 6dB BW & 99% OBW Antenna WF7 (HDR8, ePA, 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 40 of 179



### 7.3 Conducted Output Power and Max EIRP Measurement – HDR §15.407(a.1.iv) §15.407(a.3); RSS-247 [6.2]

#### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 26dB BW per FCC 15.407.

*In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).*

*In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).*

#### Test Procedure Used

ANSI C63.10-2013 – Subclause 12.3.3.2 Method PM-G  
 KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

#### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

#### Test Notes

None

FCC ID: BCGA2925 IC: 579C-A2925	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 41 of 179

### 7.3.1 Conducted Output Power Measurements

Frequency [MHz]	Detector	Mode	Power Scheme	Conducted Powers [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
5162	AVG	HDR4	ePA	12.15	23.98	-11.83
5204	AVG	HDR4	ePA	12.43	23.98	-11.55
5245	AVG	HDR4	ePA	12.27	23.98	-11.71
5162	AVG	HDR4	iPA	2.46	23.98	-21.52
5204	AVG	HDR4	iPA	2.26	23.98	-21.72
5245	AVG	HDR4	iPA	2.39	23.98	-21.59
5162	AVG	HDR8	ePA	12.46	23.98	-11.52
5204	AVG	HDR8	ePA	12.99	23.98	-10.99
5245	AVG	HDR8	ePA	12.52	23.98	-11.46
5162	AVG	HDR8	iPA	2.35	23.98	-21.63
5204	AVG	HDR8	iPA	2.43	23.98	-21.55
5245	AVG	HDR8	iPA	2.49	23.98	-21.49
5733	AVG	HDR4	ePA	13.08	30.00	-16.92
5789	AVG	HDR4	ePA	13.50	30.00	-16.50
5844	AVG	HDR4	ePA	13.39	30.00	-16.62
5733	AVG	HDR4	iPA	1.72	30.00	-28.29
5789	AVG	HDR4	iPA	1.53	30.00	-28.47
5844	AVG	HDR4	iPA	1.80	30.00	-28.20
5733	AVG	HDR8	ePA	13.24	30.00	-16.76
5789	AVG	HDR8	ePA	13.49	30.00	-16.51
5844	AVG	HDR8	ePA	12.04	30.00	-17.96
5733	AVG	HDR8	iPA	1.99	30.00	-28.01
5789	AVG	HDR8	iPA	2.00	30.00	-28.00
5844	AVG	HDR8	iPA	1.78	30.00	-28.22

**Table 7-8. Antenna WF5B FCC Maximum Conducted Output Power**

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 42 of 179

Frequency [MHz]	Detector	Mode	Power Scheme	Conducted Powers [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	Max e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
5162	AVG	HDR4	ePA	9.21	-	-	1.50	10.71	13.69	-2.98
5204	AVG	HDR4	ePA	9.32	-	-	1.50	10.82	13.69	-2.87
5245	AVG	HDR4	ePA	9.50	-	-	1.50	11.00	13.69	-2.69
5162	AVG	HDR4	iPA	2.46	-	-	1.50	3.96	13.69	-9.73
5204	AVG	HDR4	iPA	2.26	-	-	1.50	3.76	13.69	-9.93
5245	AVG	HDR4	iPA	2.39	-	-	1.50	3.89	13.69	-9.80
5162	AVG	HDR8	ePA	11.94	-	-	1.50	13.44	16.86	-3.42
5204	AVG	HDR8	ePA	11.80	-	-	1.50	13.30	16.86	-3.56
5245	AVG	HDR8	ePA	11.82	-	-	1.50	13.32	16.86	-3.54
5162	AVG	HDR8	iPA	2.35	-	-	1.50	3.85	16.86	-13.01
5204	AVG	HDR8	iPA	2.43	-	-	1.50	3.93	16.86	-12.93
5245	AVG	HDR8	iPA	2.49	-	-	1.50	3.99	16.86	-12.87
5733	AVG	HDR4	ePA	13.08	30.00	-16.92	1.10	14.18	-	-
5789	AVG	HDR4	ePA	13.50	30.00	-16.50	1.10	14.60	-	-
5844	AVG	HDR4	ePA	13.39	30.00	-16.62	1.10	14.49	-	-
5733	AVG	HDR4	iPA	1.72	30.00	-28.29	1.10	2.82	-	-
5789	AVG	HDR4	iPA	1.53	30.00	-28.47	1.10	2.63	-	-
5844	AVG	HDR4	iPA	1.80	30.00	-28.20	1.10	2.90	-	-
5733	AVG	HDR8	ePA	13.24	30.00	-16.76	1.10	14.34	-	-
5789	AVG	HDR8	ePA	13.49	30.00	-16.51	1.10	14.59	-	-
5844	AVG	HDR8	ePA	12.04	30.00	-17.96	1.10	13.14	-	-
5733	AVG	HDR8	iPA	1.99	30.00	-28.01	1.10	3.09	-	-
5789	AVG	HDR8	iPA	2.00	30.00	-28.00	1.10	3.10	-	-
5844	AVG	HDR8	iPA	1.78	30.00	-28.22	1.10	2.88	-	-

**Table 7-9. Antenna WF5B ISED Maximum Conducted Output Power**

FCC ID: BCGA2925 IC: 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 43 of 179

Frequency [MHz]	Detector	Mode	Power Scheme	Conducted Powers [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
5162	AVG	HDR4	ePA	9.68	23.98	-14.30
5204	AVG	HDR4	ePA	10.00	23.98	-13.98
5245	AVG	HDR4	ePA	9.92	23.98	-14.06
5162	AVG	HDR4	iPA	2.31	23.98	-21.67
5204	AVG	HDR4	iPA	2.50	23.98	-21.48
5245	AVG	HDR4	iPA	2.31	23.98	-21.67
5162	AVG	HDR8	ePA	9.96	23.98	-14.02
5204	AVG	HDR8	ePA	9.98	23.98	-14.00
5245	AVG	HDR8	ePA	10.00	23.98	-13.98
5162	AVG	HDR8	iPA	2.31	23.98	-21.67
5204	AVG	HDR8	iPA	2.26	23.98	-21.72
5245	AVG	HDR8	iPA	2.11	23.98	-21.87
5733	AVG	HDR4	ePA	9.41	30.00	-20.59
5789	AVG	HDR4	ePA	9.44	30.00	-20.56
5844	AVG	HDR4	ePA	9.50	30.00	-20.50
5733	AVG	HDR4	iPA	1.25	30.00	-28.75
5789	AVG	HDR4	iPA	1.94	30.00	-28.06
5844	AVG	HDR4	iPA	2.00	30.00	-28.00
5733	AVG	HDR8	ePA	9.50	30.00	-20.50
5789	AVG	HDR8	ePA	9.41	30.00	-20.59
5844	AVG	HDR8	ePA	9.27	30.00	-20.73
5733	AVG	HDR8	iPA	2.00	30.00	-28.00
5789	AVG	HDR8	iPA	1.97	30.00	-28.03
5844	AVG	HDR8	iPA	1.95	30.00	-28.05

**Table 7-10. Antenna WF8 FCC Maximum Conducted Output Power**

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 44 of 179

Frequency [MHz]	Detector	Mode	Power Scheme	Conducted Powers [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	Max e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
5162	AVG	HDR4	ePA	8.76	-	-	2.30	11.06	13.69	-2.63
5204	AVG	HDR4	ePA	9.00	-	-	2.30	11.30	13.69	-2.39
5245	AVG	HDR4	ePA	8.94	-	-	2.30	11.24	13.69	-2.45
5162	AVG	HDR4	iPA	2.31	-	-	2.30	4.61	13.69	-9.08
5204	AVG	HDR4	iPA	2.50	-	-	2.30	4.80	13.69	-8.89
5245	AVG	HDR4	iPA	2.31	-	-	2.30	4.61	13.69	-9.08
5162	AVG	HDR8	ePA	9.96	-	-	2.30	12.26	16.86	-4.60
5204	AVG	HDR8	ePA	9.98	-	-	2.30	12.28	16.86	-4.58
5245	AVG	HDR8	ePA	10.00	-	-	2.30	12.30	16.86	-4.56
5162	AVG	HDR8	iPA	2.31	-	-	2.30	4.61	16.86	-12.25
5204	AVG	HDR8	iPA	2.26	-	-	2.30	4.56	16.86	-12.29
5245	AVG	HDR8	iPA	2.11	-	-	2.30	4.41	16.86	-12.45
5733	AVG	HDR4	ePA	9.41	30.00	-20.59	2.20	11.61	-	-
5789	AVG	HDR4	ePA	9.44	30.00	-20.56	2.20	11.64	-	-
5844	AVG	HDR4	ePA	9.50	30.00	-20.50	2.20	11.70	-	-
5733	AVG	HDR4	iPA	1.25	30.00	-28.75	2.20	3.45	-	-
5789	AVG	HDR4	iPA	1.94	30.00	-28.06	2.20	4.14	-	-
5844	AVG	HDR4	iPA	2.00	30.00	-28.00	2.20	4.20	-	-
5733	AVG	HDR8	ePA	9.50	30.00	-20.50	2.20	11.70	-	-
5789	AVG	HDR8	ePA	9.41	30.00	-20.59	2.20	11.61	-	-
5844	AVG	HDR8	ePA	9.27	30.00	-20.73	2.20	11.47	-	-
5733	AVG	HDR8	iPA	2.00	30.00	-28.00	2.20	4.20	-	-
5789	AVG	HDR8	iPA	1.97	30.00	-28.03	2.20	4.17	-	-
5844	AVG	HDR8	iPA	1.95	30.00	-28.05	2.20	4.15	-	-

**Table 7-11. Antenna WF8 ISED Maximum Conducted Output Power**

FCC ID: BCGA2925 IC: 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 45 of 179

Frequency [MHz]	Detector	Mode	Power Scheme	Conducted Powers [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
5162	AVG	HDR4	ePA	8.88	23.98	-15.10
5204	AVG	HDR4	ePA	9.00	23.98	-14.98
5245	AVG	HDR4	ePA	8.81	23.98	-15.17
5162	AVG	HDR4	iPA	1.98	23.98	-22.00
5204	AVG	HDR4	iPA	1.94	23.98	-22.04
5245	AVG	HDR4	iPA	2.00	23.98	-21.98
5162	AVG	HDR8	ePA	8.75	23.98	-15.23
5204	AVG	HDR8	ePA	8.73	23.98	-15.26
5245	AVG	HDR8	ePA	8.68	23.98	-15.30
5162	AVG	HDR8	iPA	2.48	23.98	-21.50
5204	AVG	HDR8	iPA	2.28	23.98	-21.70
5245	AVG	HDR8	iPA	2.39	23.98	-21.59
5733	AVG	HDR4	ePA	8.92	30.00	-21.08
5789	AVG	HDR4	ePA	8.91	30.00	-21.09
5844	AVG	HDR4	ePA	8.99	30.00	-21.01
5733	AVG	HDR4	iPA	1.97	30.00	-28.03
5789	AVG	HDR4	iPA	2.00	30.00	-28.00
5844	AVG	HDR4	iPA	1.95	30.00	-28.05
5733	AVG	HDR8	ePA	8.88	30.00	-21.12
5789	AVG	HDR8	ePA	8.81	30.00	-21.19
5844	AVG	HDR8	ePA	8.96	30.00	-21.05
5733	AVG	HDR8	iPA	1.90	30.00	-28.10
5789	AVG	HDR8	iPA	2.00	30.00	-28.00
5844	AVG	HDR8	iPA	1.84	30.00	-28.16

**Table 7-12. Antenna WF7 FCC Maximum Conducted Output Power**

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 46 of 179



Frequency [MHz]	Detector	Mode	Power Scheme	Conducted Powers [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	Max e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
5162	AVG	HDR4	ePA	8.88	-	-	-2.00	6.88	13.69	-6.81
5204	AVG	HDR4	ePA	9.00	-	-	-2.00	7.00	13.69	-6.69
5245	AVG	HDR4	ePA	8.81	-	-	-2.00	6.81	13.69	-6.88
5162	AVG	HDR4	iPA	1.98	-	-	-2.00	-0.02	13.69	-13.71
5204	AVG	HDR4	iPA	1.94	-	-	-2.00	-0.06	13.69	-13.75
5245	AVG	HDR4	iPA	2.00	-	-	-2.00	0.00	13.69	-13.69
5162	AVG	HDR8	ePA	8.75	-	-	-2.00	6.75	16.86	-10.10
5204	AVG	HDR8	ePA	8.73	-	-	-2.00	6.73	16.86	-10.13
5245	AVG	HDR8	ePA	8.68	-	-	-2.00	6.68	16.86	-10.18
5162	AVG	HDR8	iPA	2.48	-	-	-2.00	0.48	16.86	-16.38
5204	AVG	HDR8	iPA	2.28	-	-	-2.00	0.28	16.86	-16.58
5245	AVG	HDR8	iPA	2.39	-	-	-2.00	0.39	16.86	-16.47
5733	AVG	HDR4	ePA	8.92	30.00	-21.08	2.00	10.92	-	-
5789	AVG	HDR4	ePA	8.91	30.00	-21.09	2.00	10.91	-	-
5844	AVG	HDR4	ePA	8.99	30.00	-21.01	2.00	10.99	-	-
5733	AVG	HDR4	iPA	1.97	30.00	-28.03	2.00	3.97	-	-
5789	AVG	HDR4	iPA	2.00	30.00	-28.00	2.00	4.00	-	-
5844	AVG	HDR4	iPA	1.95	30.00	-28.05	2.00	3.95	-	-
5733	AVG	HDR8	ePA	8.88	30.00	-21.12	2.00	10.88	-	-
5789	AVG	HDR8	ePA	8.81	30.00	-21.19	2.00	10.81	-	-
5844	AVG	HDR8	ePA	8.96	30.00	-21.05	2.00	10.96	-	-
5733	AVG	HDR8	iPA	1.90	30.00	-28.10	2.00	3.90	-	-
5789	AVG	HDR8	iPA	2.00	30.00	-28.00	2.00	4.00	-	-
5844	AVG	HDR8	iPA	1.84	30.00	-28.16	2.00	3.84	-	-

**Table 7-13. Antenna WF7 ISED Maximum Conducted Output Power**

FCC ID: BCGA2925 IC: 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 47 of 179

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Frequency [MHz]	Detector	Mode	Power Scheme	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				Antenna WF5B	Antenna WF8	Summed		
5162	AVG	HDR4	ePA	9.41	9.32	12.37	23.98	-11.61
5204	AVG	HDR4	ePA	9.37	9.43	12.41	23.98	-11.57
5245	AVG	HDR4	ePA	9.39	9.00	12.21	23.98	-11.77
5162	AVG	HDR4	iPA	2.29	2.22	5.26	23.98	-18.72
5204	AVG	HDR4	iPA	2.44	2.43	5.45	23.98	-18.53
5245	AVG	HDR4	iPA	2.41	2.27	5.35	23.98	-18.63
5162	AVG	HDR8	ePA	11.97	9.85	14.05	23.98	-9.93
5204	AVG	HDR8	ePA	11.54	9.91	13.81	23.98	-10.17
5245	AVG	HDR8	ePA	11.78	10.00	13.99	23.98	-9.99
5162	AVG	HDR8	iPA	2.09	2.47	5.30	23.98	-18.68
5204	AVG	HDR8	iPA	2.50	2.48	5.50	23.98	-18.48
5245	AVG	HDR8	iPA	2.40	2.46	5.44	23.98	-18.54
5733	AVG	HDR4	ePA	13.14	9.19	14.61	30.00	-15.39
5789	AVG	HDR4	ePA	13.00	9.32	14.55	30.00	-15.45
5844	AVG	HDR4	ePA	12.00	9.34	13.88	30.00	-16.12
5733	AVG	HDR4	iPA	2.00	1.98	5.00	30.00	-25.00
5789	AVG	HDR4	iPA	1.96	1.91	4.95	30.00	-25.05
5844	AVG	HDR4	iPA	1.65	1.57	4.62	30.00	-25.38
5733	AVG	HDR8	ePA	13.05	9.45	14.63	30.00	-15.37
5789	AVG	HDR8	ePA	13.27	9.48	14.78	30.00	-15.22
5844	AVG	HDR8	ePA	13.03	9.33	14.57	30.00	-15.43
5733	AVG	HDR8	iPA	1.97	1.21	4.62	30.00	-25.38
5789	AVG	HDR8	iPA	1.93	1.88	4.91	30.00	-25.09
5844	AVG	HDR8	iPA	1.59	1.88	4.75	30.00	-25.25

**Table 7-14. TxBF FCC Maximum Conducted Output Power**

FCC ID: BCGA2925 IC: 579C-A2925			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 48 of 179	



Frequency [MHz]	Detector	Mode	Power Scheme	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	Max e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna WF5B	Antenna WF8	Summed						
5162	AVG	HDR4	ePA	3.50	2.60	6.08	-	-	4.92	11.00	13.69	-2.69
5204	AVG	HDR4	ePA	3.49	2.80	6.17	-	-	4.92	11.09	13.69	-2.60
5245	AVG	HDR4	ePA	3.49	2.65	6.10	-	-	4.92	11.02	13.69	-2.67
5162	AVG	HDR4	iPA	2.29	2.22	5.26	-	-	4.92	10.18	13.69	-3.51
5204	AVG	HDR4	iPA	2.44	2.43	5.45	-	-	4.92	10.37	13.69	-3.32
5245	AVG	HDR4	iPA	2.41	2.27	5.35	-	-	4.92	10.27	13.69	-3.42
5162	AVG	HDR8	ePA	6.00	5.48	8.76	-	-	4.92	13.68	16.86	-3.18
5204	AVG	HDR8	ePA	5.79	5.47	8.64	-	-	4.92	13.56	16.86	-3.30
5245	AVG	HDR8	ePA	5.85	5.50	8.69	-	-	4.92	13.61	16.86	-3.25
5162	AVG	HDR8	iPA	2.09	2.47	5.30	-	-	4.92	10.22	16.86	-6.64
5204	AVG	HDR8	iPA	2.50	2.48	5.50	-	-	4.92	10.42	16.86	-6.44
5245	AVG	HDR8	iPA	2.40	2.46	5.44	-	-	4.92	10.36	16.86	-6.50
5733	AVG	HDR4	ePA	13.14	9.19	14.61	30.00	-15.39	4.68	19.29	-	-
5789	AVG	HDR4	ePA	13.00	9.32	14.55	30.00	-15.45	4.68	19.23	-	-
5844	AVG	HDR4	ePA	12.00	9.34	13.88	30.00	-16.12	4.68	18.56	-	-
5733	AVG	HDR4	iPA	2.00	1.98	5.00	30.00	-25.00	4.68	9.68	-	-
5789	AVG	HDR4	iPA	1.96	1.91	4.95	30.00	-25.05	4.68	9.63	-	-
5844	AVG	HDR4	iPA	1.65	1.57	4.62	30.00	-25.38	4.68	9.30	-	-
5733	AVG	HDR8	ePA	13.05	9.45	14.63	30.00	-15.37	4.68	19.31	-	-
5789	AVG	HDR8	ePA	13.27	9.48	14.78	30.00	-15.22	4.68	19.46	-	-
5844	AVG	HDR8	ePA	13.03	9.33	14.57	30.00	-15.43	4.68	19.25	-	-
5733	AVG	HDR8	iPA	1.97	1.21	4.62	30.00	-25.38	4.68	9.30	-	-
5789	AVG	HDR8	iPA	1.93	1.88	4.91	30.00	-25.09	4.68	9.59	-	-
5844	AVG	HDR8	iPA	1.59	1.88	4.75	30.00	-25.25	4.68	9.43	-	-

**Table 7-15. TxBF ISED Maximum Conducted Output Power**

FCC ID: BCGA2925 IC: 579C-A2925		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 49 of 179

**Note:**

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna WF5B and Antenna WF8 were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10-2013 Section 14.4.3, the uncorrelated directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

**Sample TxBF Calculation:**

At 5162MHz, the average conducted output power was measured to be 3.50dBm for Antenna WF5B and 2.60dBm for Antenna WF8.

$$\text{Antenna WF5B} + \text{Antenna WF8} = \text{TxBF}$$

$$(3.50 \text{ dBm} + 2.60 \text{ dBm}) = (2.239 \text{ mW} + 1.820 \text{ mW}) = 4.059 \text{ mW} = 6.08 \text{ dBm}$$

**Sample e.i.r.p. Calculation:**

At 5162MHz, the average conducted output power was measured to be 6.08dBm with a directional gain of 4.92 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$6.08 \text{ dBm} + 4.92 \text{ dBi} = 11.00 \text{ dBm}$$

<b>FCC ID:</b> BCGA2925 <b>IC:</b> 579C-A2925	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270069-09.BCG	<b>Test Dates:</b> 11/29/23-3/22/2024	<b>EUT Type:</b> Tablet Device	Page 50 of 179

## 7.4 Maximum Power Spectral Density – HDR

§15.407(a.1.iv) §15.407(a.3); RSS-247 [6.2]

### Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

***In the 5.15 – 5.25GHz band, the maximum permissible power spectral density is 11dBm/MHz.***

***In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.***

### Test Procedure Used

ANSI C63.10-2013 – Subclause 12.3.2.2  
KDB 789033 D02 v02r01 – Section F

### Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz for U-NII 1, 500kHz for U-NII 3
4. VBW  $\geq$  3MHz for U-NII 1,  $\geq$  3 x RBW for U-NII 3
5. Number of sweep points  $\geq$  2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 51 of 179

V 10.5 12/15/2021

### 7.4.1 Antenna WF5B Power Spectral Density Measurements


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5162	4.0	HDR4	ePA	9.09	11.00	-1.91
	5204	4.0	HDR4	ePA	9.54	11.00	-1.46
	5245	4.0	HDR4	ePA	9.54	11.00	-1.46
	5162	4.0	HDR4	iPA	-0.67	11.00	-11.67
	5204	4.0	HDR4	iPA	-0.43	11.00	-11.43
	5245	4.0	HDR4	iPA	2.63	11.00	-8.38
	5162	8.0	HDR8	ePA	6.97	11.00	-4.03
	5204	8.0	HDR8	ePA	6.80	11.00	-4.20
	5245	8.0	HDR8	ePA	6.65	11.00	-4.35
	5162	8.0	HDR8	iPA	-2.95	11.00	-13.95
	5204	8.0	HDR8	iPA	-2.80	11.00	-13.80
	5245	8.0	HDR8	iPA	-3.01	11.00	-14.01

Table 7-16. FCC Power Spectral Density Measurements Antenna WF5B


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5162	4.0	HDR4	ePA	5.65	1.50	7.15	10.00	-2.85
	5204	4.0	HDR4	ePA	6.35	1.50	7.85	10.00	-2.15
	5245	4.0	HDR4	ePA	6.11	1.50	7.61	10.00	-2.39
	5162	4.0	HDR4	iPA	-0.67	1.50	0.83	10.00	-9.17
	5204	4.0	HDR4	iPA	-0.43	1.50	1.07	10.00	-8.93
	5245	4.0	HDR4	iPA	2.63	1.50	4.13	10.00	-5.88
	5162	8.0	HDR8	ePA	6.50	1.50	8.00	10.00	-2.01
	5204	8.0	HDR8	ePA	6.48	1.50	7.98	10.00	-2.02
	5245	8.0	HDR8	ePA	6.29	1.50	7.79	10.00	-2.22
	5162	8.0	HDR8	iPA	-2.95	1.50	-1.45	10.00	-11.45
	5204	8.0	HDR8	iPA	-2.80	1.50	-1.30	10.00	-11.30
	5245	8.0	HDR8	iPA	-3.01	1.50	-1.51	10.00	-11.51

Table 7-17. ISED Power Spectral Density Measurements Antenna WF5B

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 52 of 179

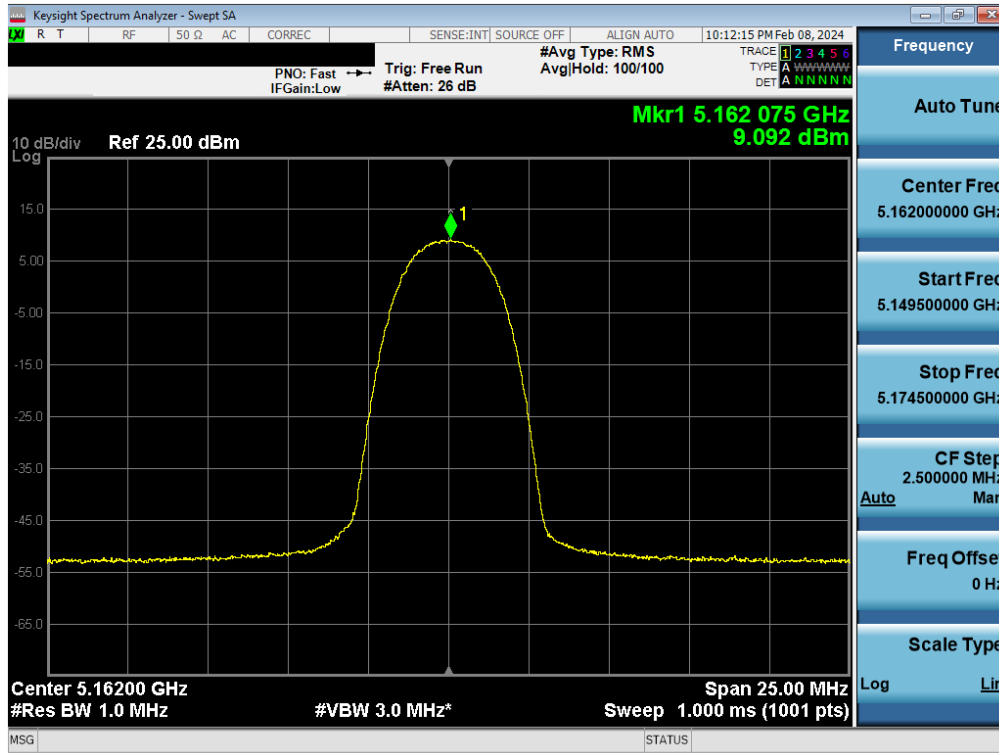


Plot 7-37. FCC PSD Antenna WF5B (HDR4, ePA – 5162MHz)

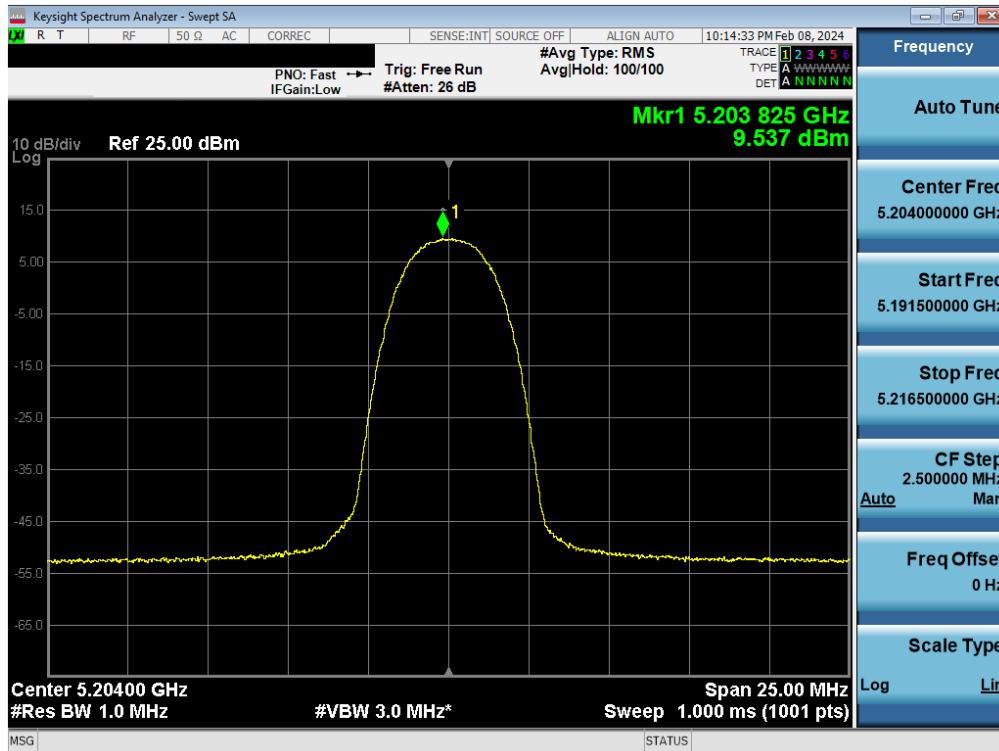


Plot 7-38. FCC PSD Antenna WF5B (HDR4, ePA – 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 53 of 179

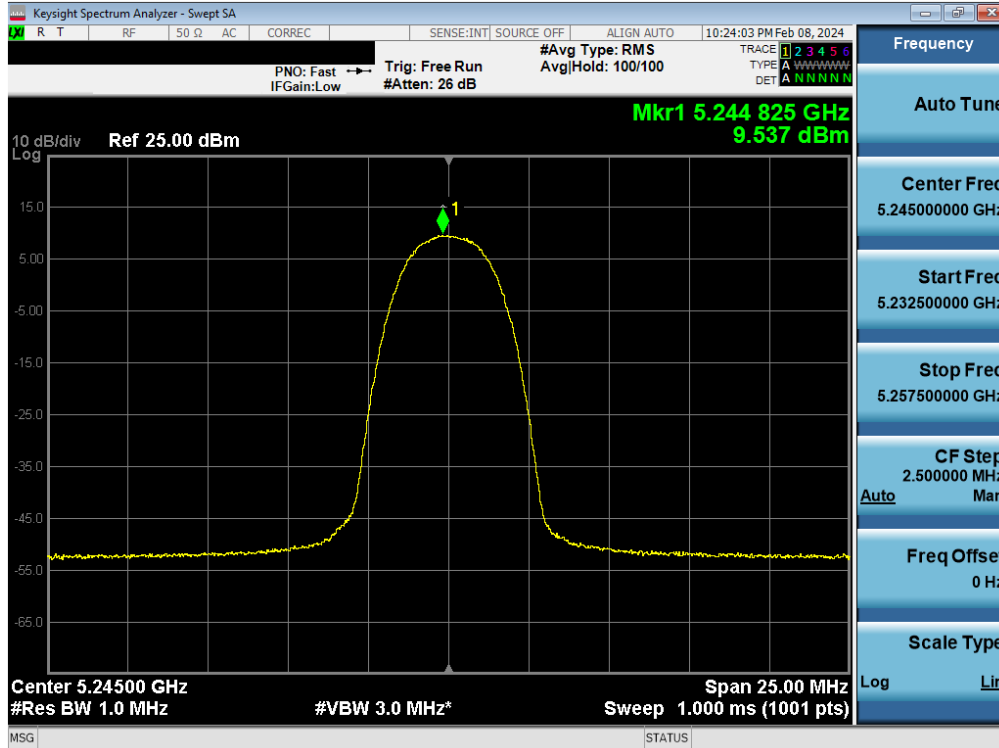


Plot 7-39. FCC PSD Antenna WF5B (HDR4, ePA- 5245MHz)

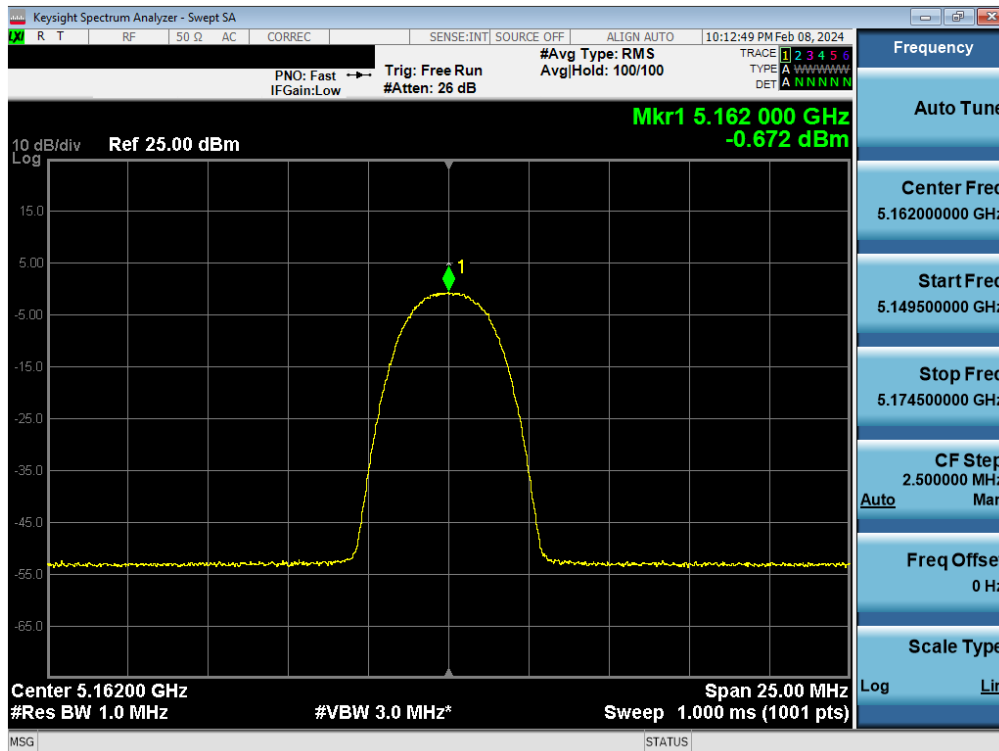


Plot 7-40. FCC/ISED PSD Antenna WF5B (HDR4, iPA - 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 54 of 179


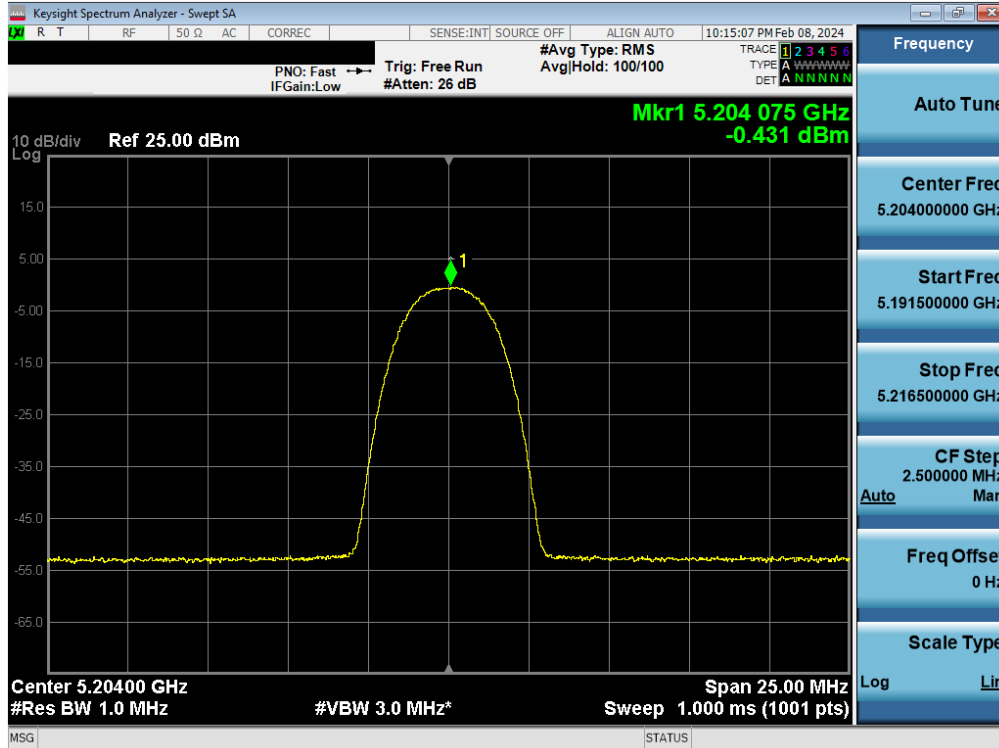


Plot 7-41. FCC/ISED PSD Antenna WF5B (HDR4, iPA – 5204MHz)

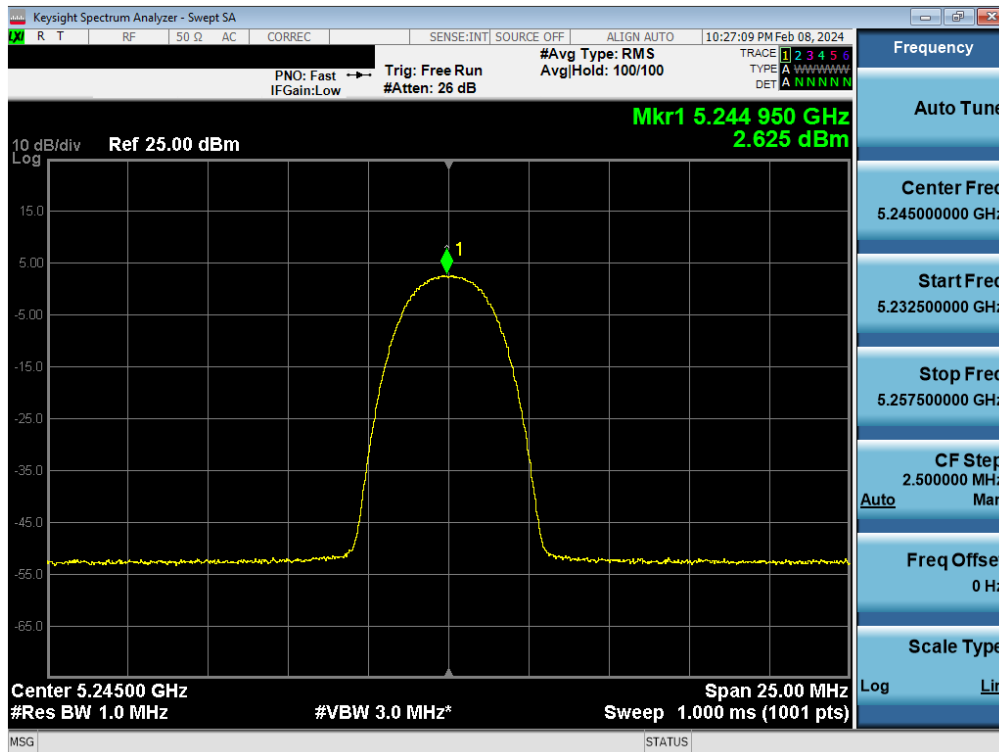


Plot 7-42. FCC/ISED PSD Antenna WF5B (HDR4, iPA– 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 55 of 179

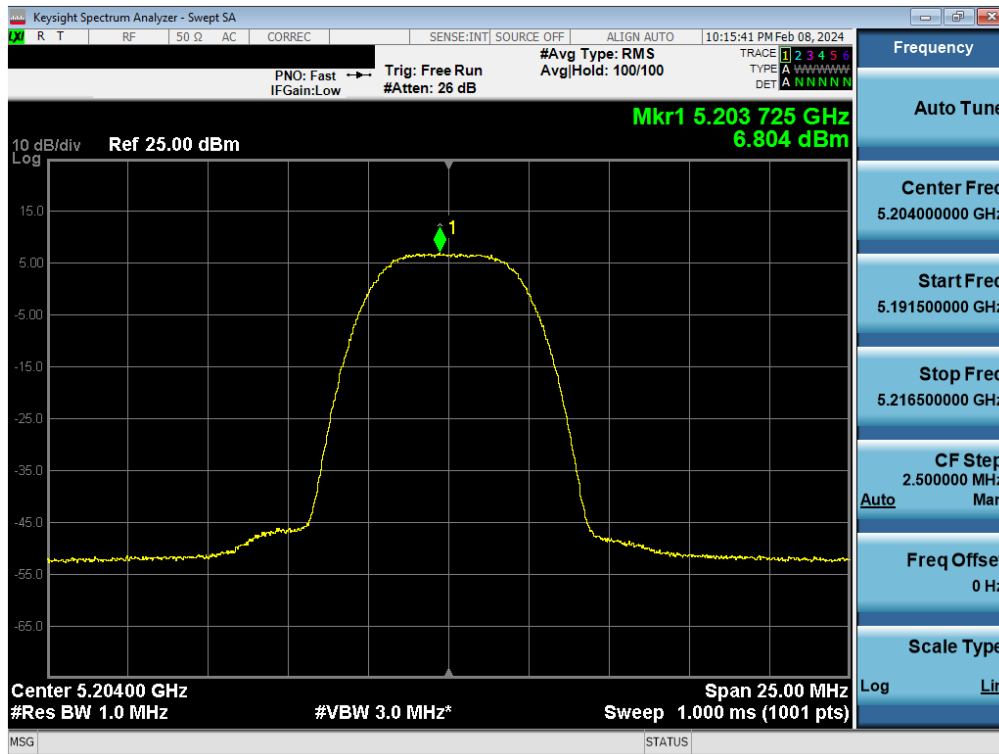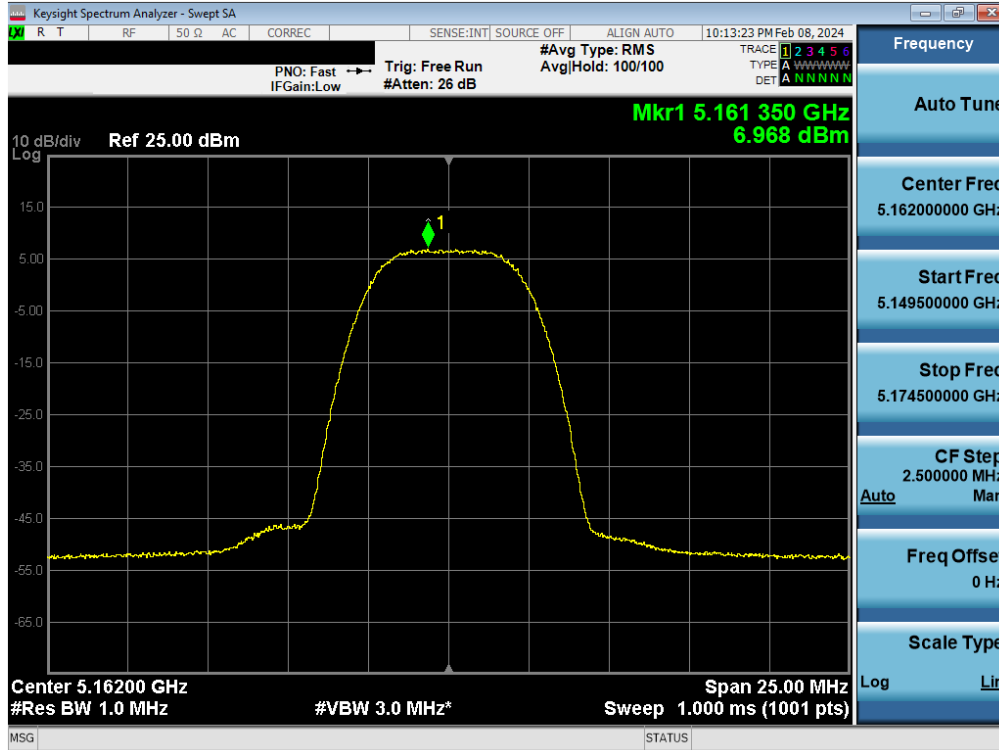


FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 56 of 179



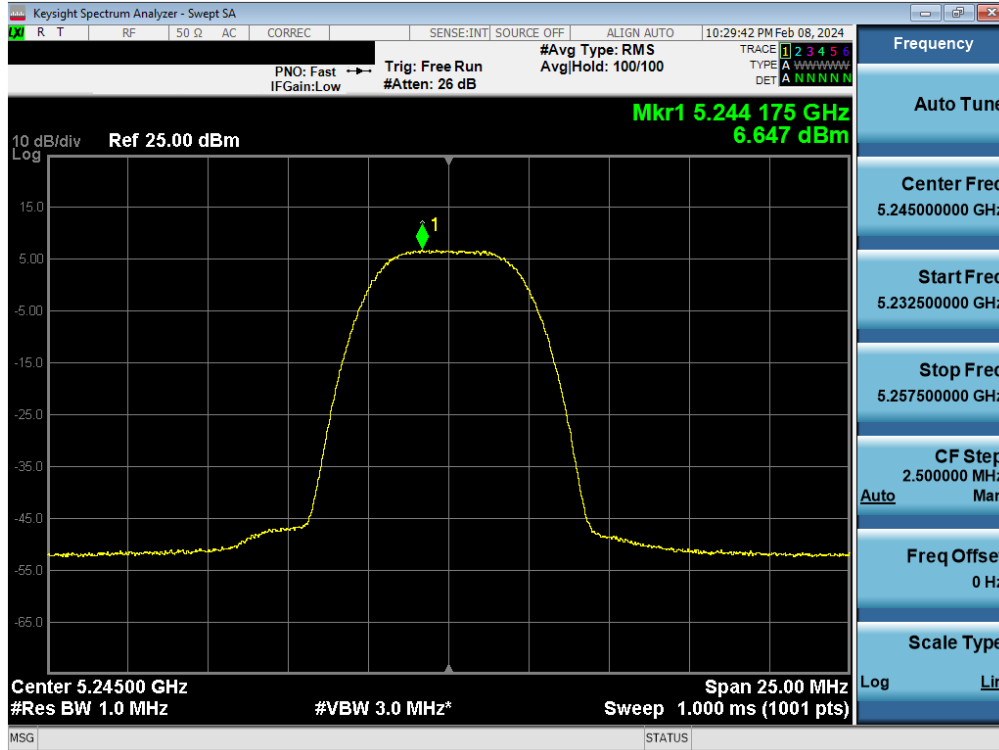


Plot 7-45. FCC PSD Antenna WF5B (HDR8, ePA- 5245MHz)

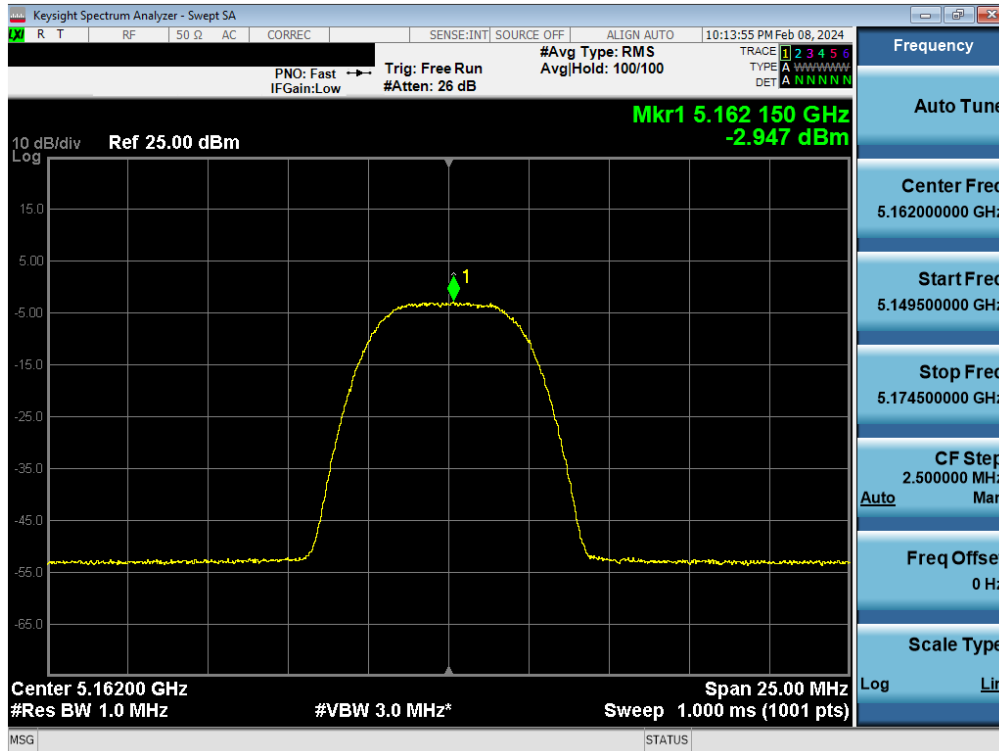


Plot 7-46. FCC/ISED PSD Antenna WF5B (HDR8, iPA - 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 57 of 179

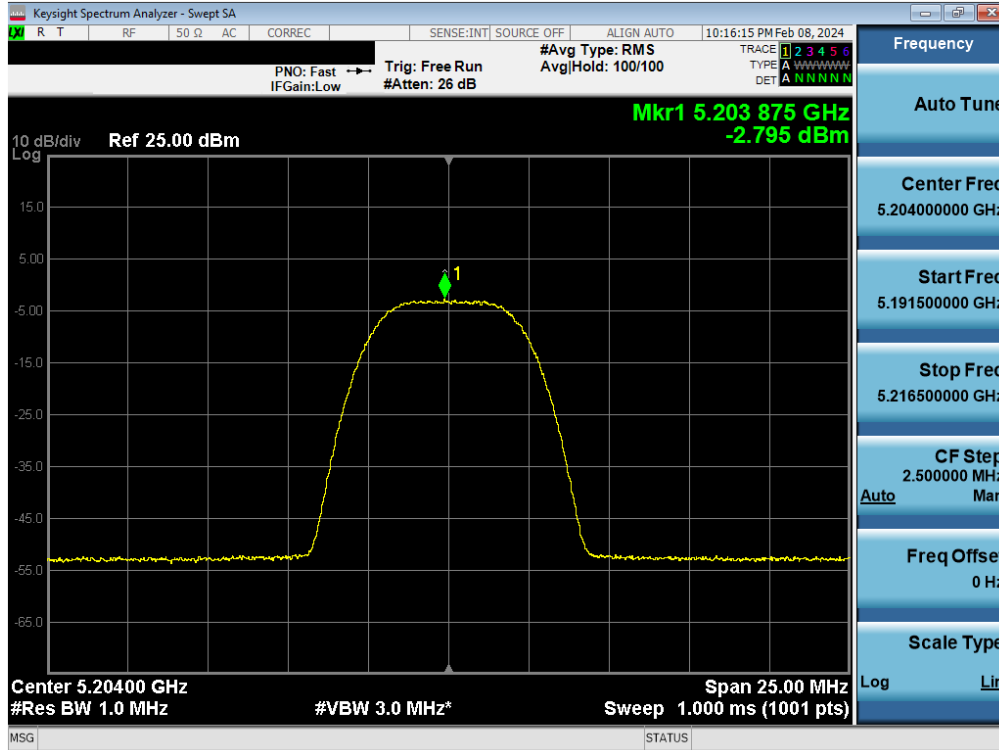


Plot 7-47. FCC/ISED PSD Antenna WF5B (HDR8, iPA – 5204MHz)

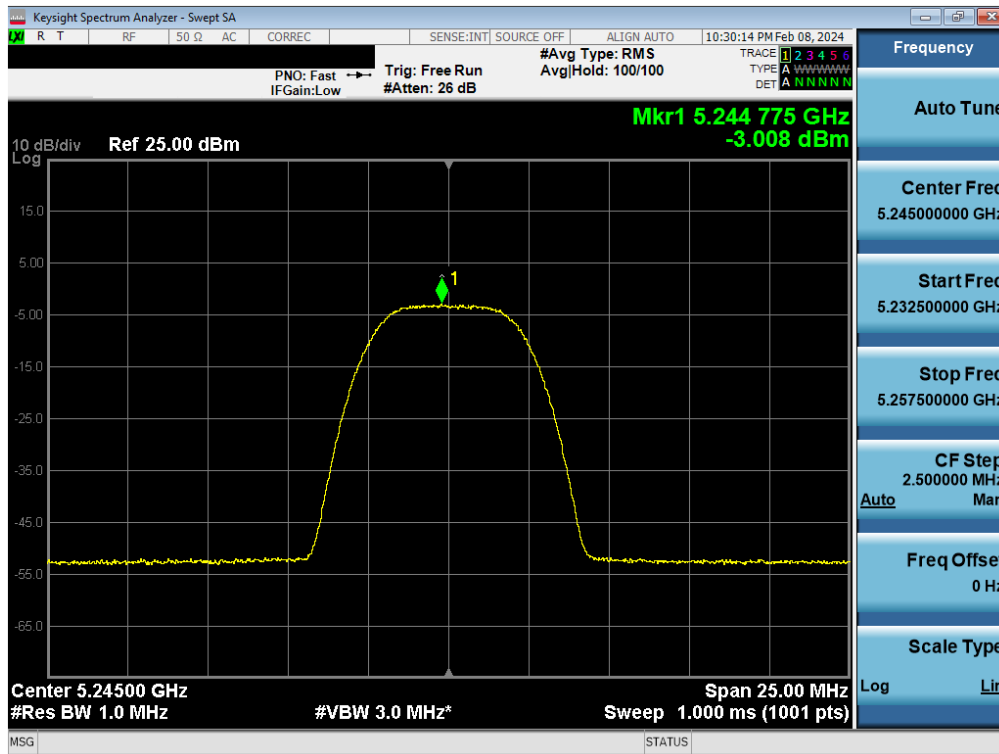


Plot 7-48. FCC/ISED PSD Antenna WF5B (HDR8, iPA– 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 58 of 179

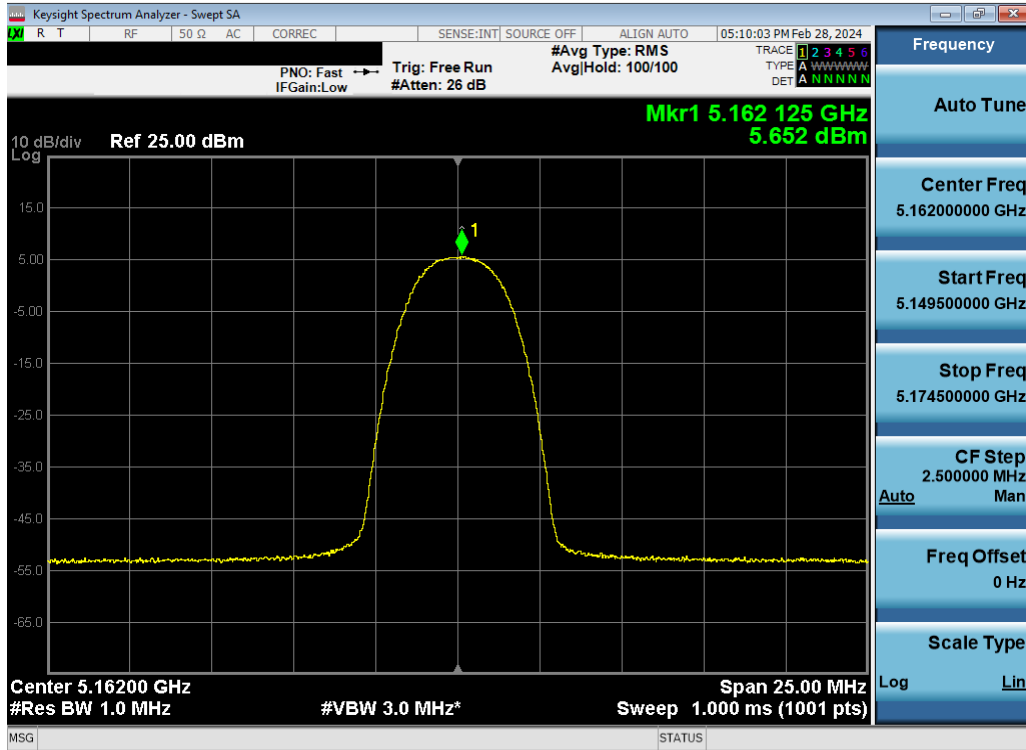


Plot 7-49. ISED PSD Antenna WF5B (HDR4, ePA – 5162MHz)

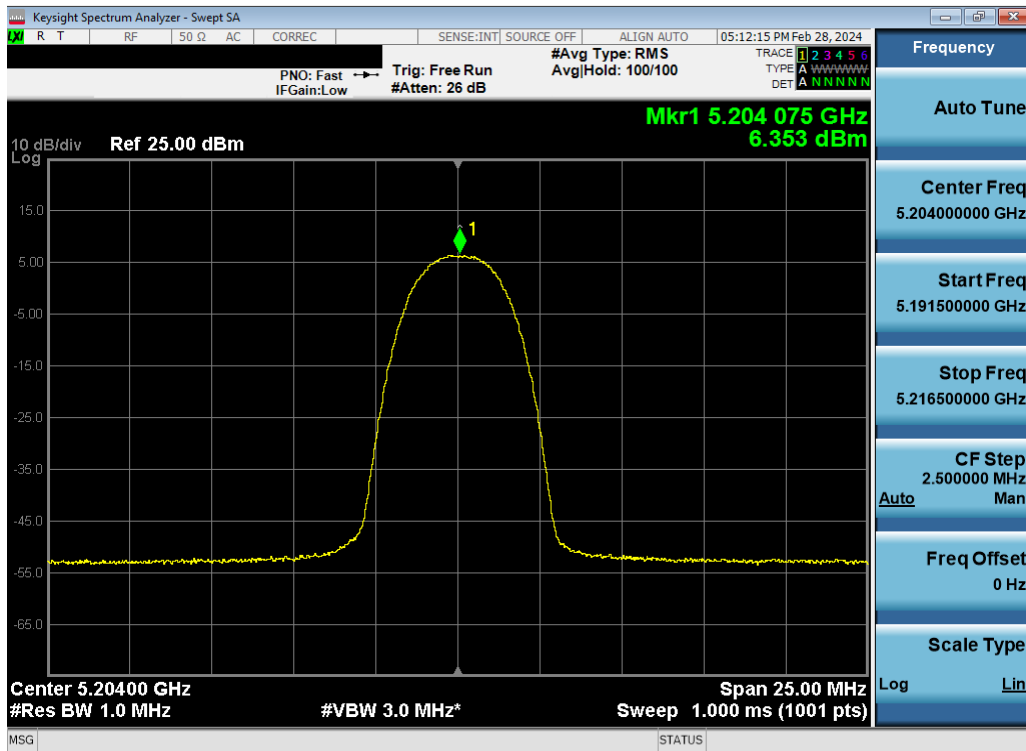


Plot 7-50. ISED PSD Antenna WF5B (HDR4, ePA – 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 59 of 179

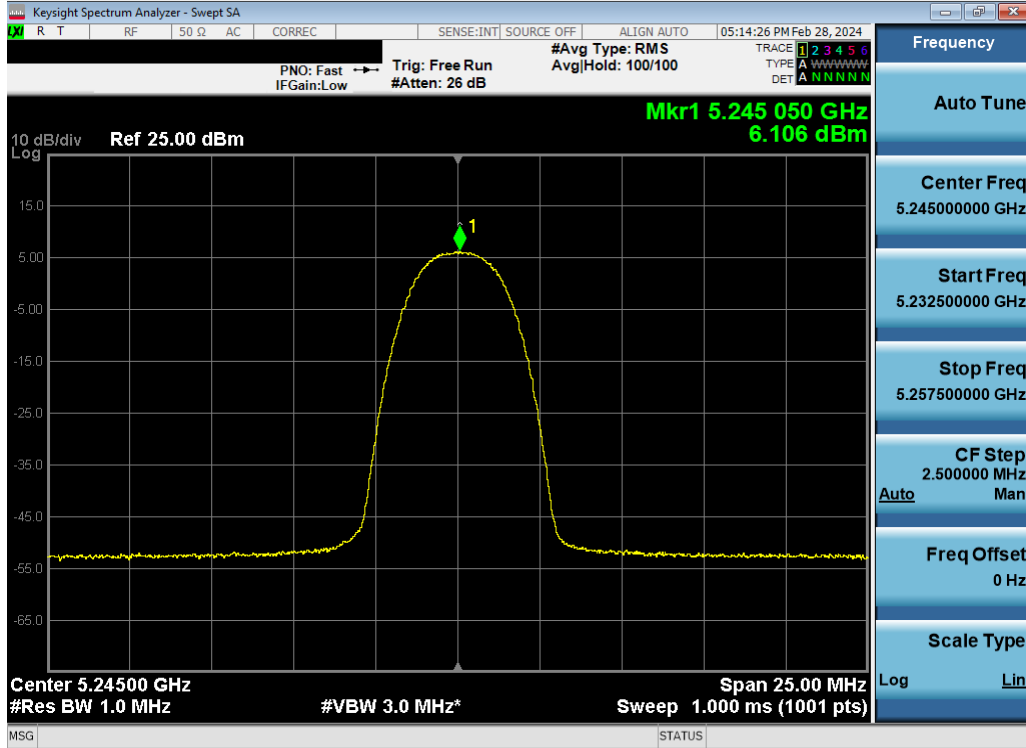


Plot 7-51. ISED PSD Antenna WF5B (HDR4, ePA- 5245MHz)

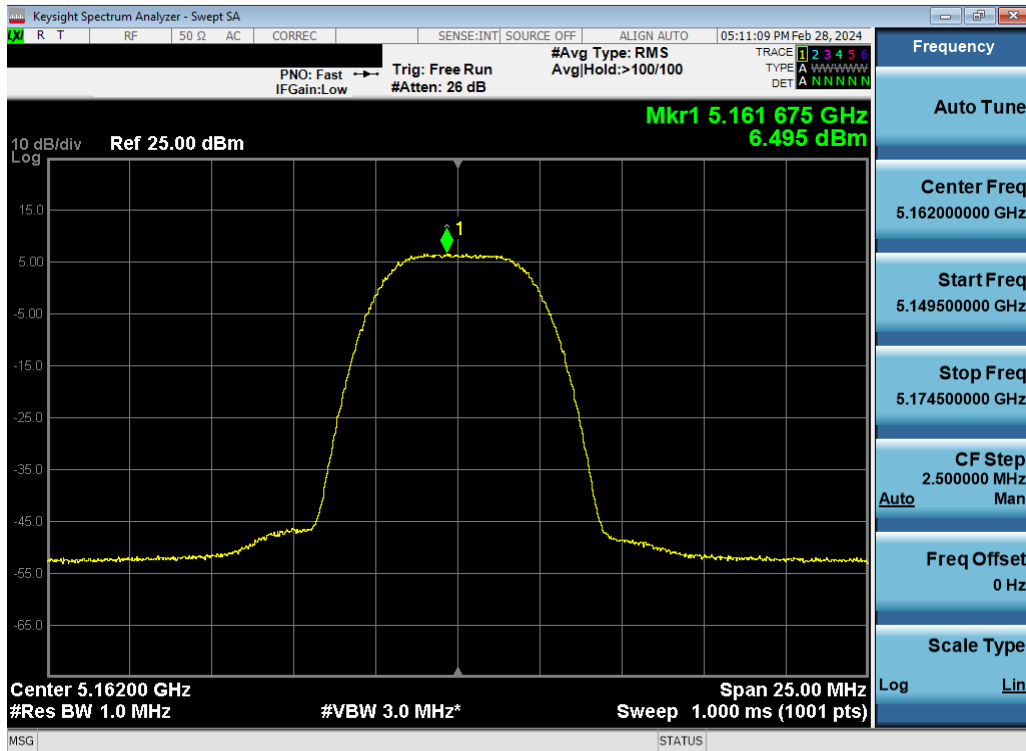


Plot 7-52. ISED PSD Antenna WF5B (HDR8, ePA - 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 60 of 179

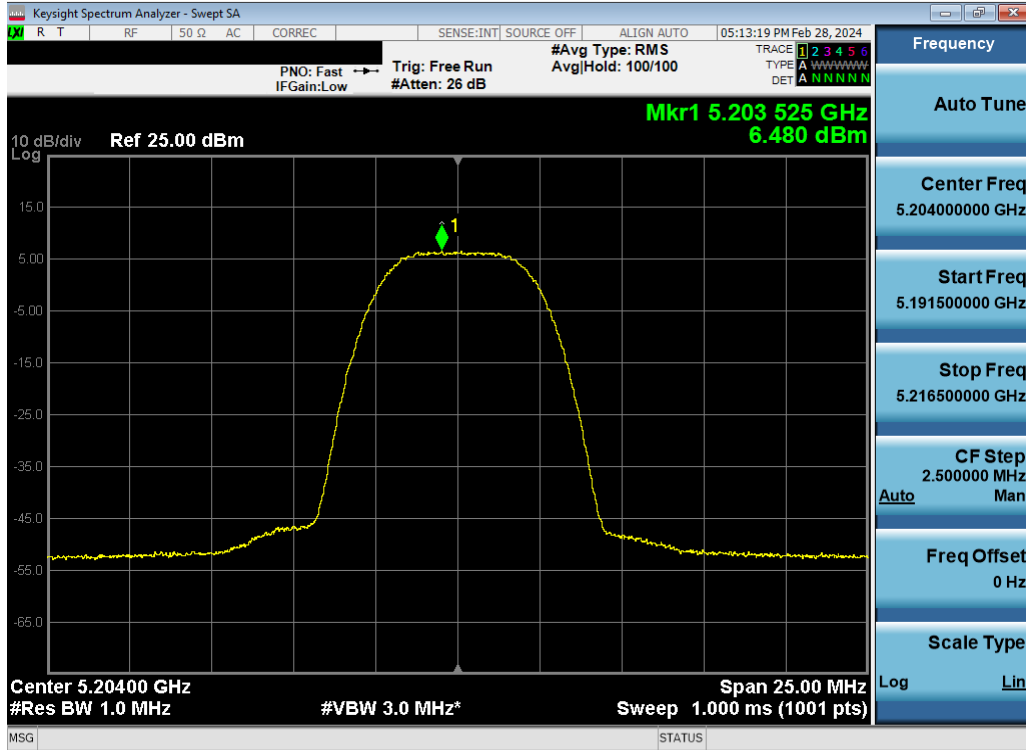

Plot 7-53. ISED PSD Antenna WF5B (HDR8, ePA – 5204MHz)

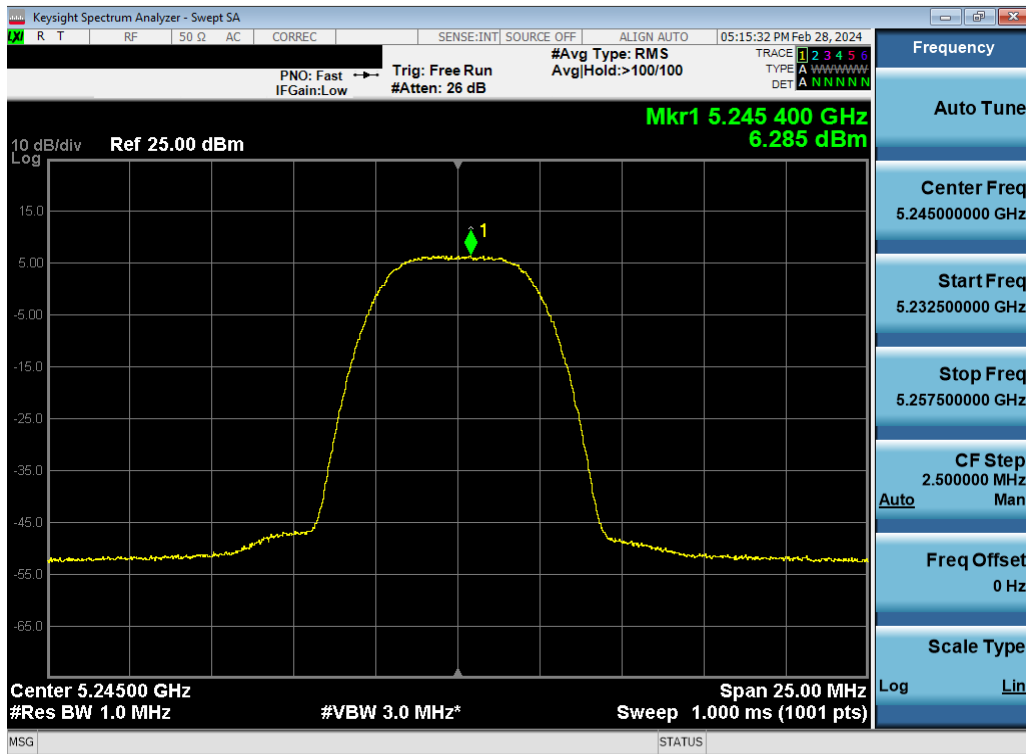


Plot 7-54. ISED PSD Antenna WF5B (HDR8, ePA– 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 61 of 179


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5733	4.0	HDR4	ePA	6.81	30.00	-23.19
	5789	4.0	HDR4	ePA	6.64	30.00	-23.36
	5844	4.0	HDR4	ePA	6.91	30.00	-23.10
	5733	4.0	HDR4	iPA	-3.86	30.00	-33.86
	5789	4.0	HDR4	iPA	-3.53	30.00	-33.53
	5844	4.0	HDR4	iPA	-3.47	30.00	-33.47
	5733	8.0	HDR8	ePA	3.53	30.00	-26.47
	5789	8.0	HDR8	ePA	3.54	30.00	-26.46
	5844	8.0	HDR8	ePA	4.35	30.00	-25.65
	5733	8.0	HDR8	iPA	-6.05	30.00	-36.05
	5789	8.0	HDR8	iPA	-6.39	30.00	-36.39
	5844	8.0	HDR8	iPA	-6.55	30.00	-36.55

Table 7-18. Power Spectral Density Measurements Antenna WF5B

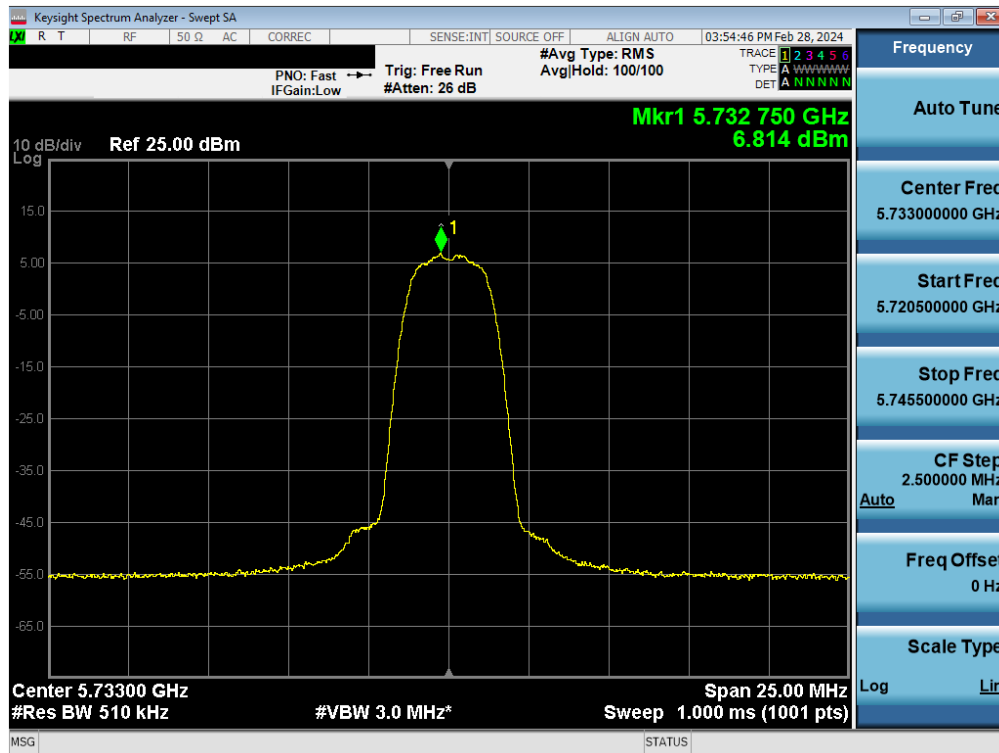


Plot 7-55. PSD Antenna WF5B (HDR4, ePA 5733MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 62 of 179

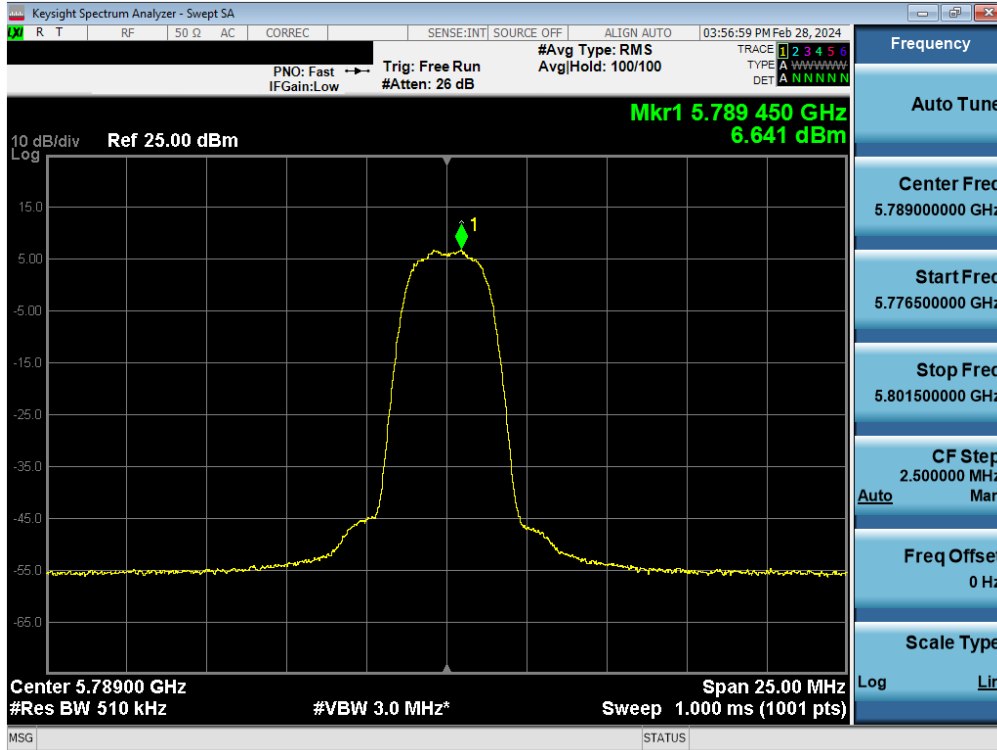


Plot 7-56. PSD Antenna WF5B (HDR4, ePA 5789MHz)

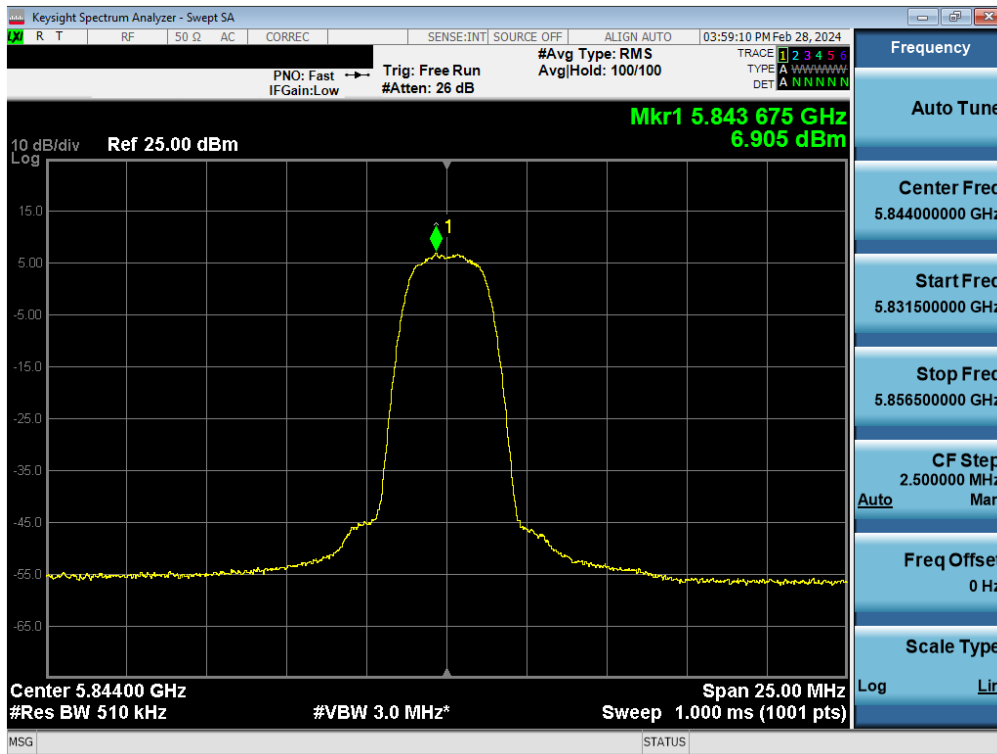


Plot 7-57. PSD Antenna WF5B (HDR4, ePA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 63 of 179

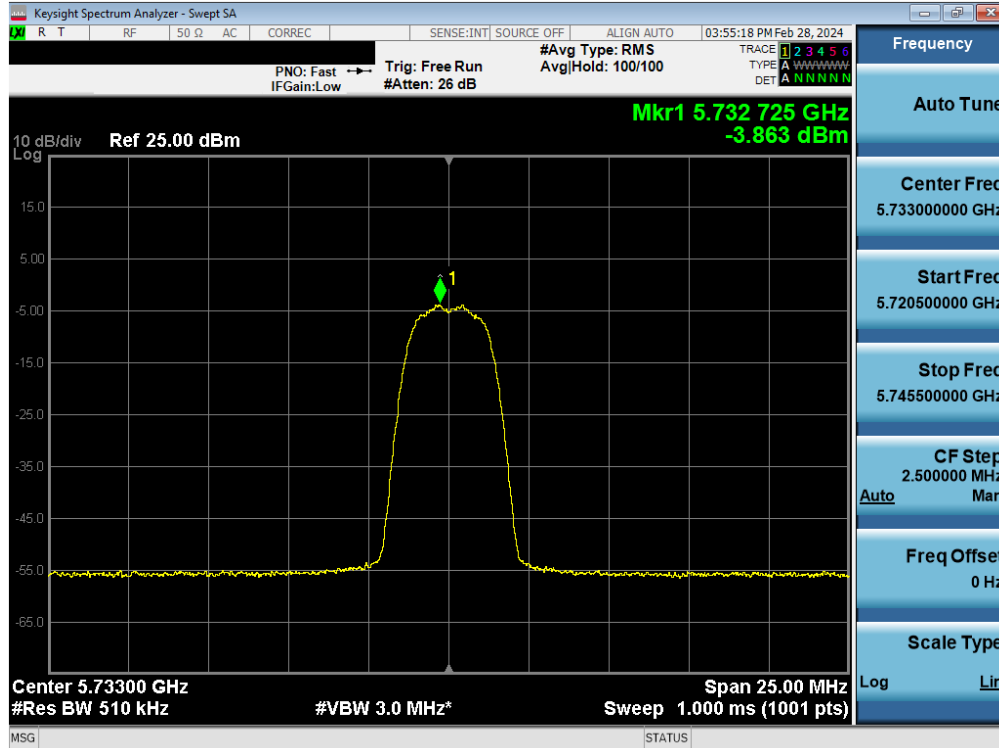


Plot 7-58. PSD Antenna WF5B (HDR4, iPA 5733MHz)

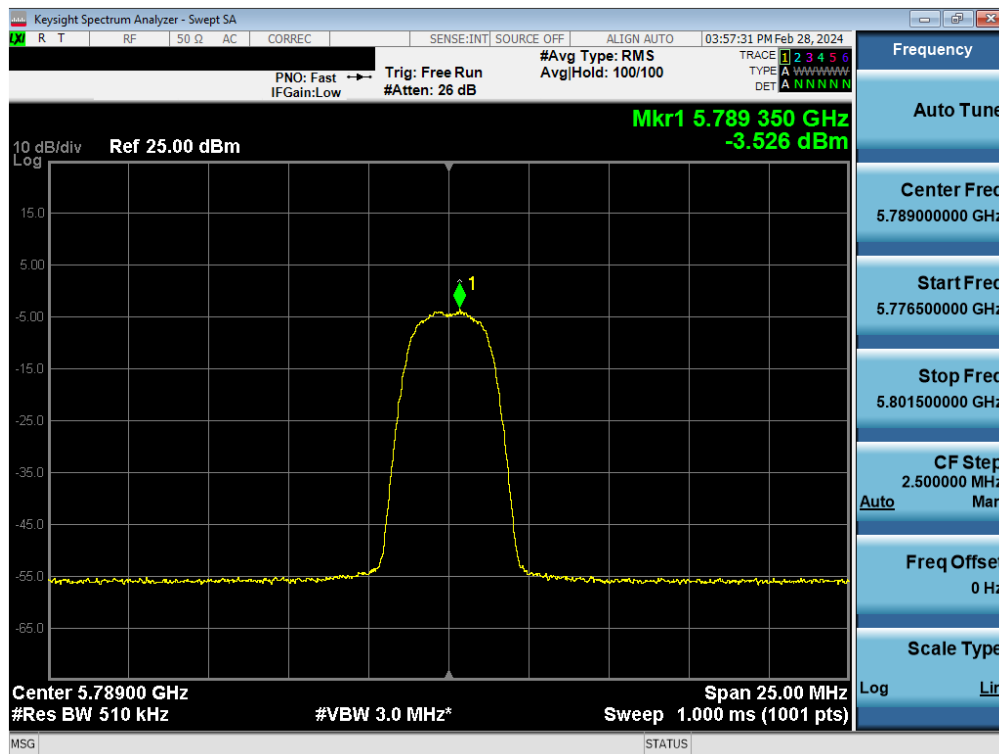


Plot 7-59. PSD Antenna WF5B (HDR4, iPA 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 64 of 179



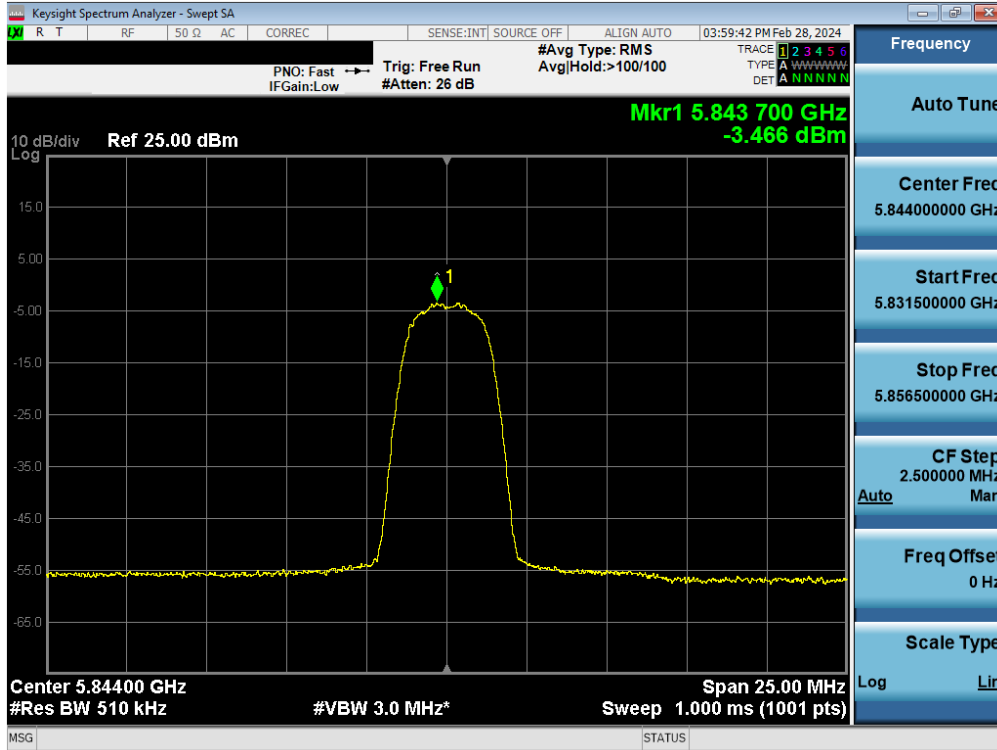


Plot 7-60. PSD Antenna WF5B (HDR4, iPA 5844MHz)

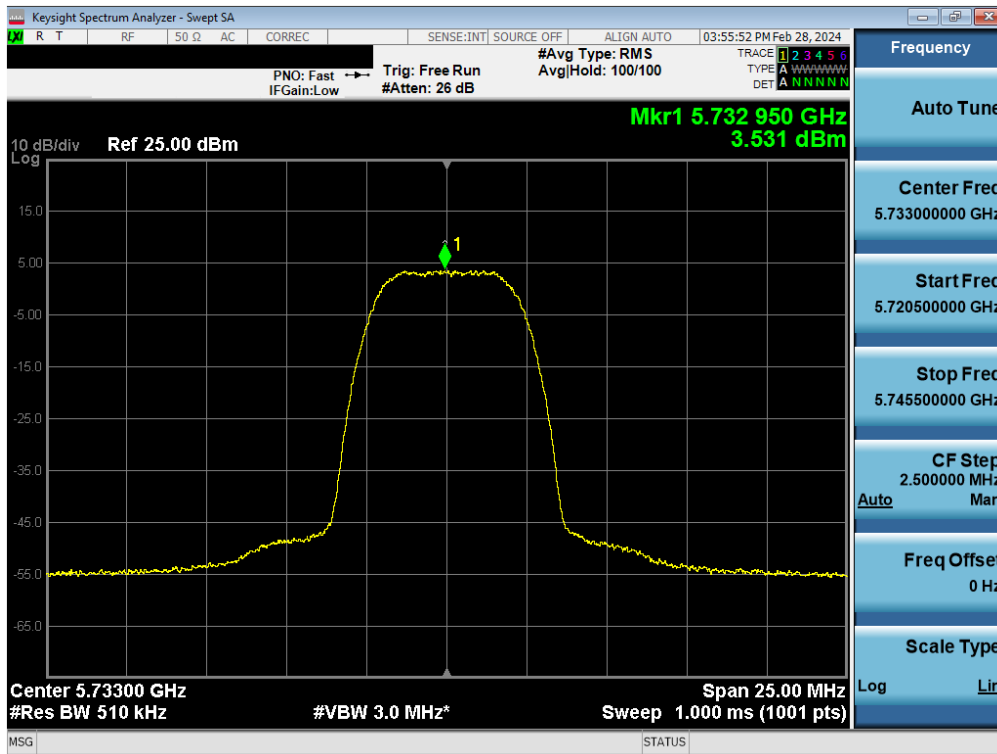


Plot 7-61. PSD Antenna WF5B (HDR8, ePA 5733MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 65 of 179

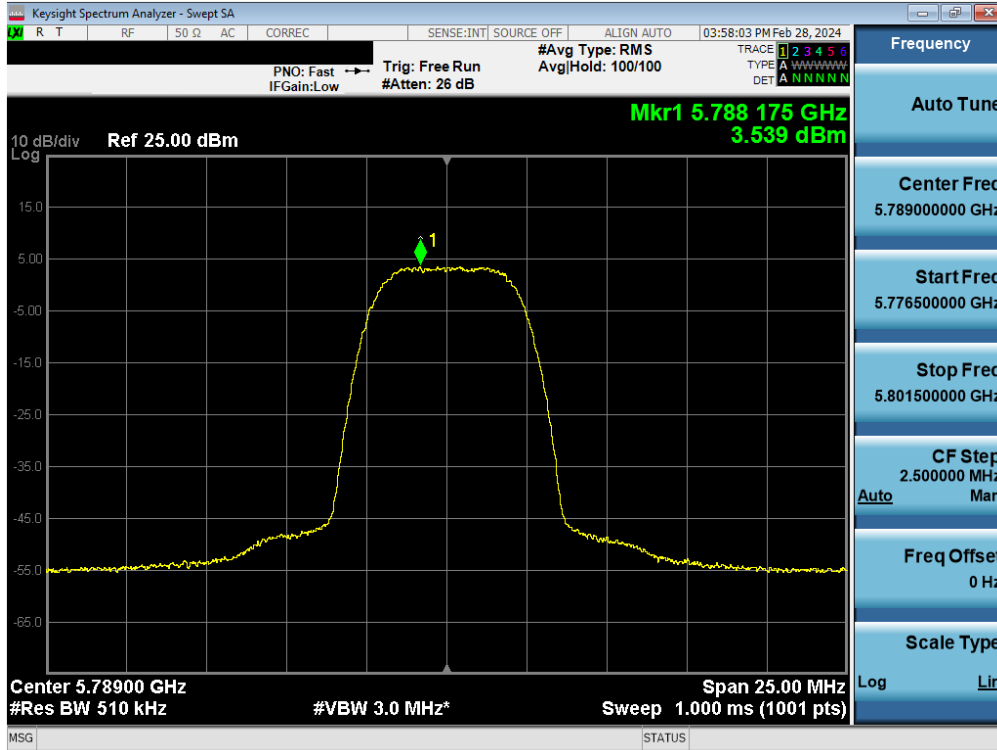


Plot 7-62. PSD Antenna WF5B (HDR8, ePA 5789MHz)

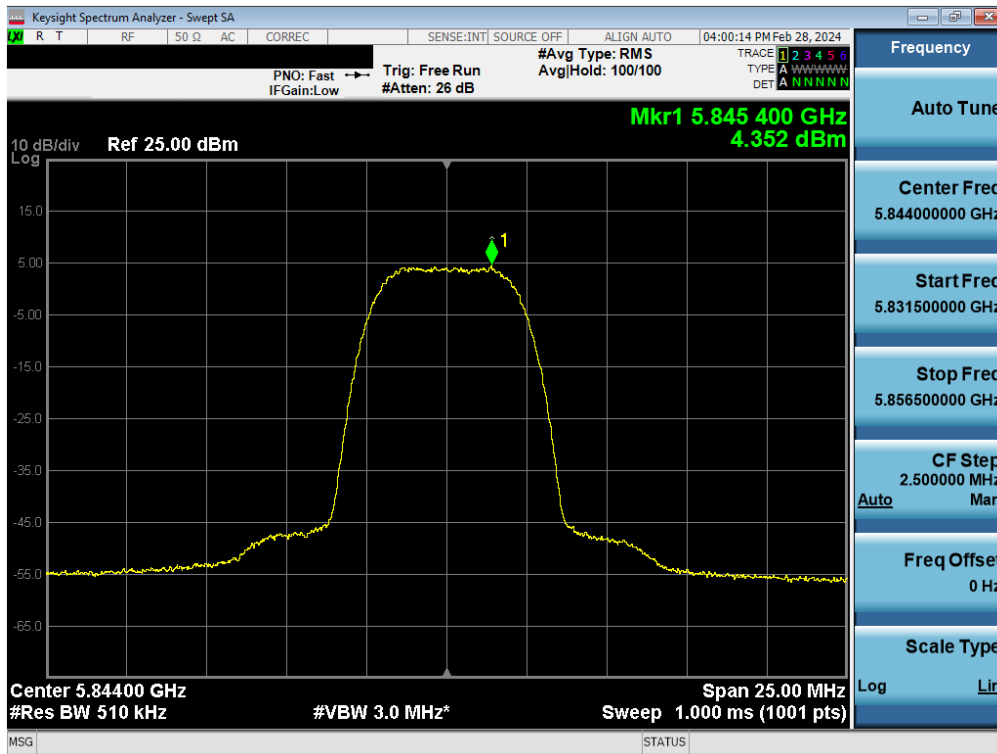


Plot 7-63. PSD Antenna WF5B (HDR8, ePA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 66 of 179

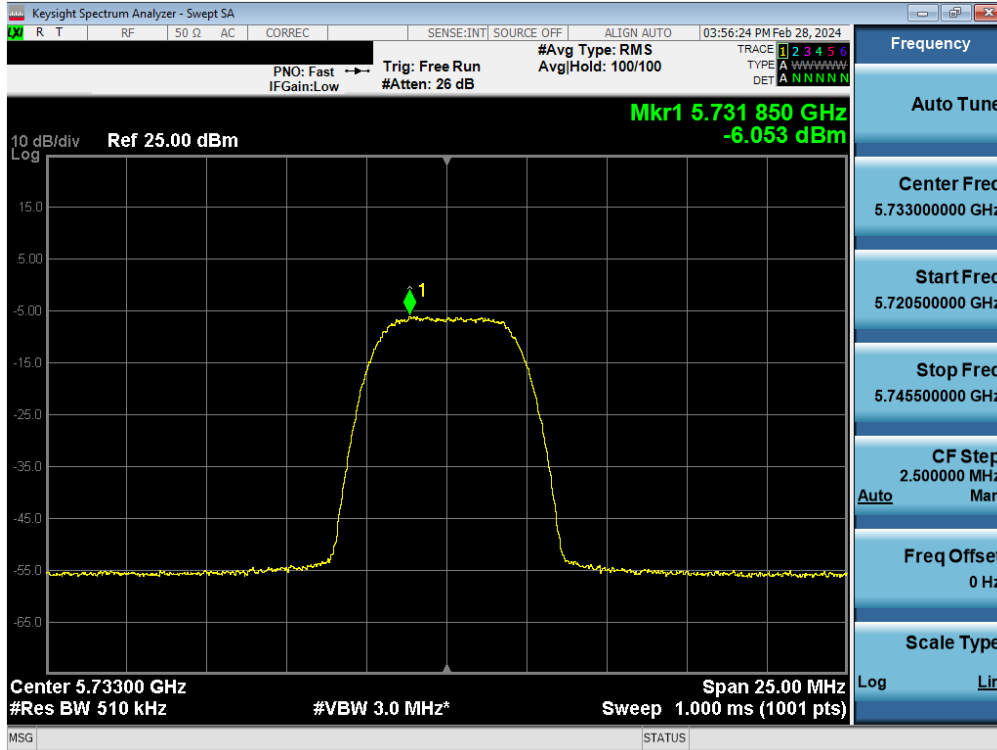


Plot 7-64. PSD Antenna WF5B (HDR8, iPA 5733MHz)

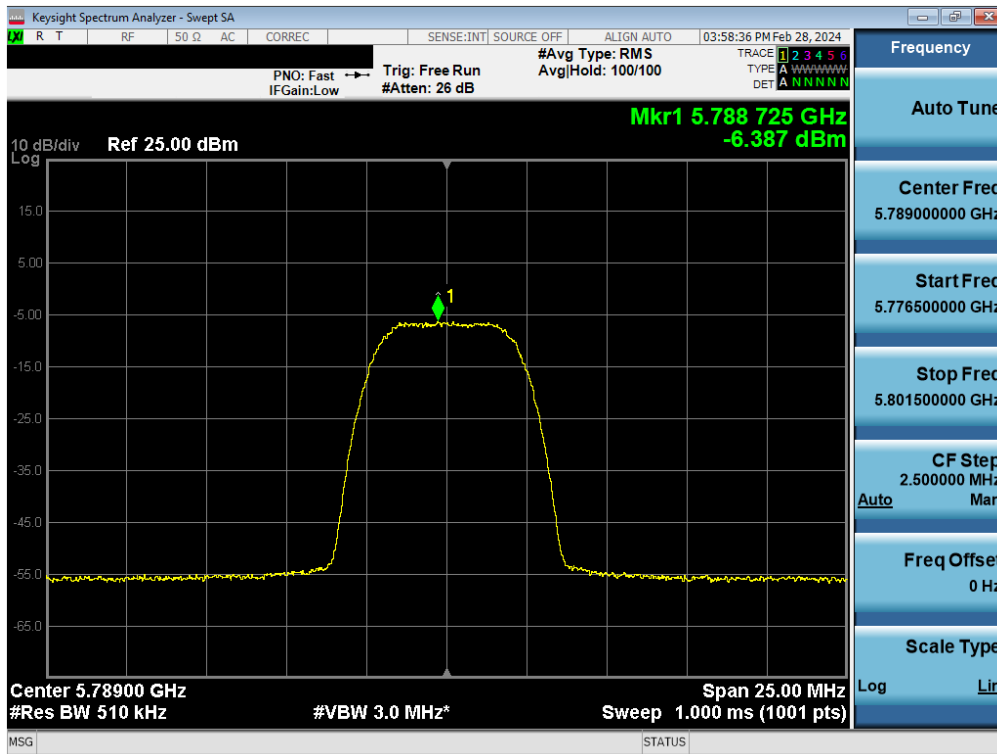

Plot 7-65. PSD Antenna WF5B (HDR8, iPA 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 67 of 179

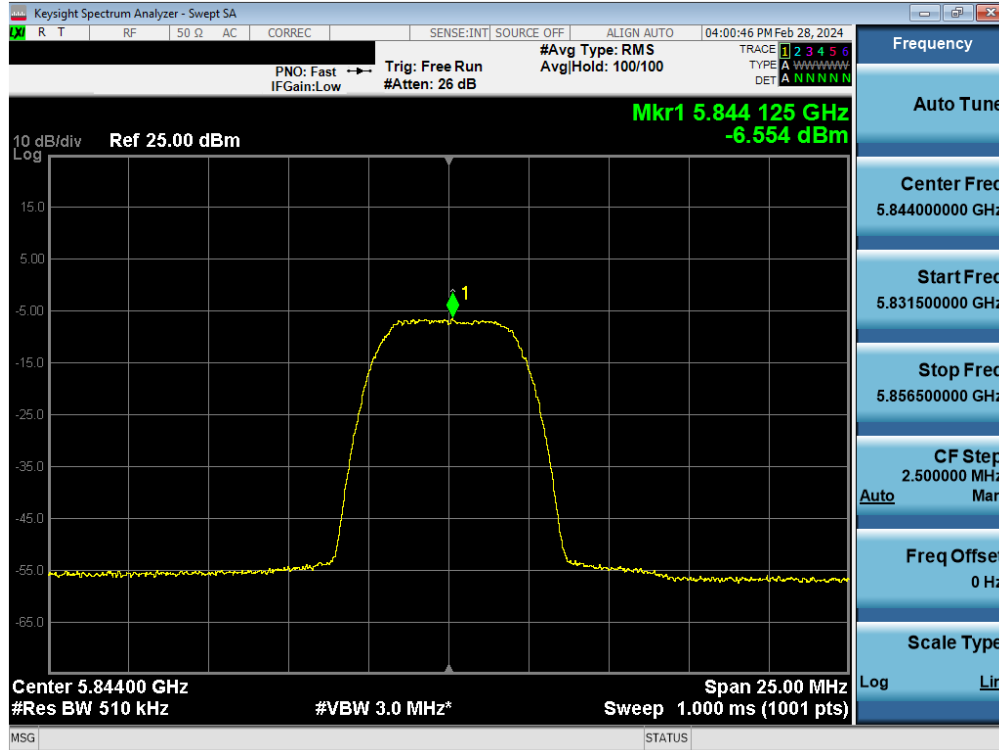

Plot 7-66. PSD Antenna WF5B (HDR8, iPA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 68 of 179

## 7.4.2 Antenna WF8 Power Spectral Density Measurements


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5162	4.0	HDR4	ePA	6.76	11.00	-4.24
	5204	4.0	HDR4	ePA	7.51	11.00	-3.49
	5245	4.0	HDR4	ePA	7.24	11.00	-3.76
	5162	4.0	HDR4	iPA	-0.53	11.00	-11.53
	5204	4.0	HDR4	iPA	-0.26	11.00	-11.26
	5245	4.0	HDR4	iPA	0.15	11.00	-10.85
	5162	8.0	HDR8	ePA	4.77	11.00	-6.23
	5204	8.0	HDR8	ePA	4.85	11.00	-6.15
	5245	8.0	HDR8	ePA	5.09	11.00	-5.91
	5162	8.0	HDR8	iPA	-3.11	11.00	-14.11
	5204	8.0	HDR8	iPA	-3.25	11.00	-14.25
	5245	8.0	HDR8	iPA	-3.02	11.00	-14.02

Table 7-19. FCC Power Spectral Density Measurements Antenna WF8


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5162	4.0	HDR4	ePA	5.65	2.30	7.95	10.00	-2.05
	5204	4.0	HDR4	ePA	6.35	2.30	8.65	10.00	-1.35
	5245	4.0	HDR4	ePA	6.11	2.30	8.41	10.00	-1.59
	5162	4.0	HDR4	iPA	-0.53	2.30	1.77	10.00	-8.23
	5204	4.0	HDR4	iPA	-0.26	2.30	2.04	10.00	-7.96
	5245	4.0	HDR4	iPA	0.15	2.30	2.45	10.00	-7.55
	5162	8.0	HDR8	ePA	4.77	2.30	7.07	10.00	-2.93
	5204	8.0	HDR8	ePA	4.85	2.30	7.15	10.00	-2.85
	5245	8.0	HDR8	ePA	5.09	2.30	7.39	10.00	-2.61
	5162	8.0	HDR8	iPA	-3.11	2.30	-0.81	10.00	-10.81
	5204	8.0	HDR8	iPA	-3.25	2.30	-0.95	10.00	-10.95
	5245	8.0	HDR8	iPA	-3.02	2.30	-0.72	10.00	-10.72

Table 7-20. ISED Power Spectral Density Measurements Antenna WF8

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device		Page 69 of 179

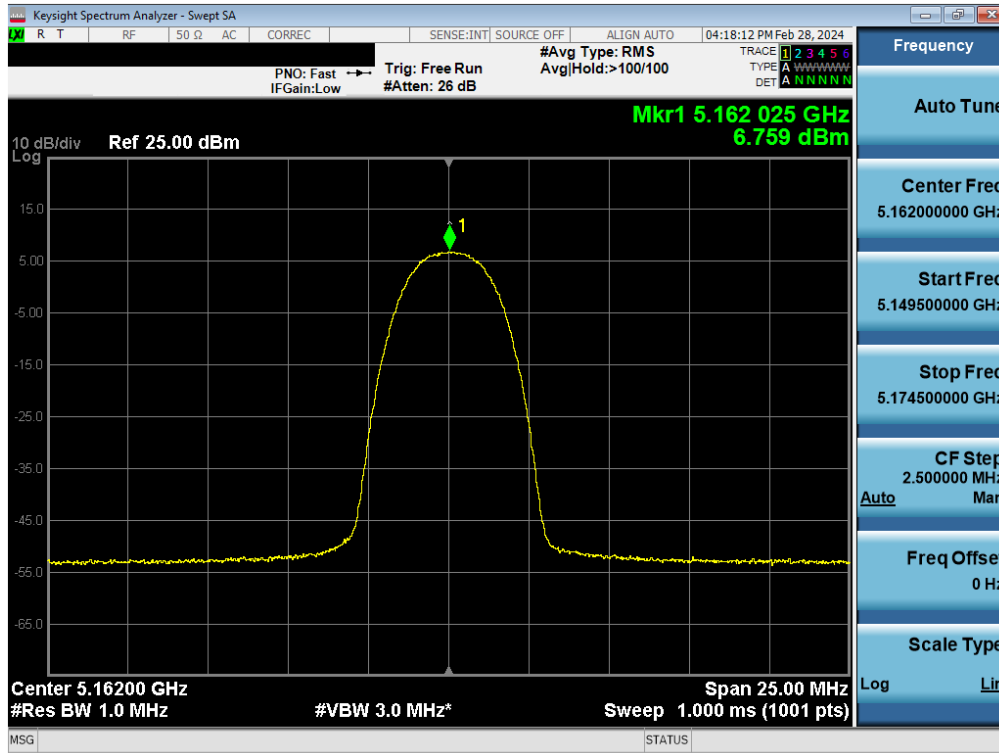


Plot 7-67. FCC PSD Antenna WF8 (HDR4, ePA – 5162MHz)

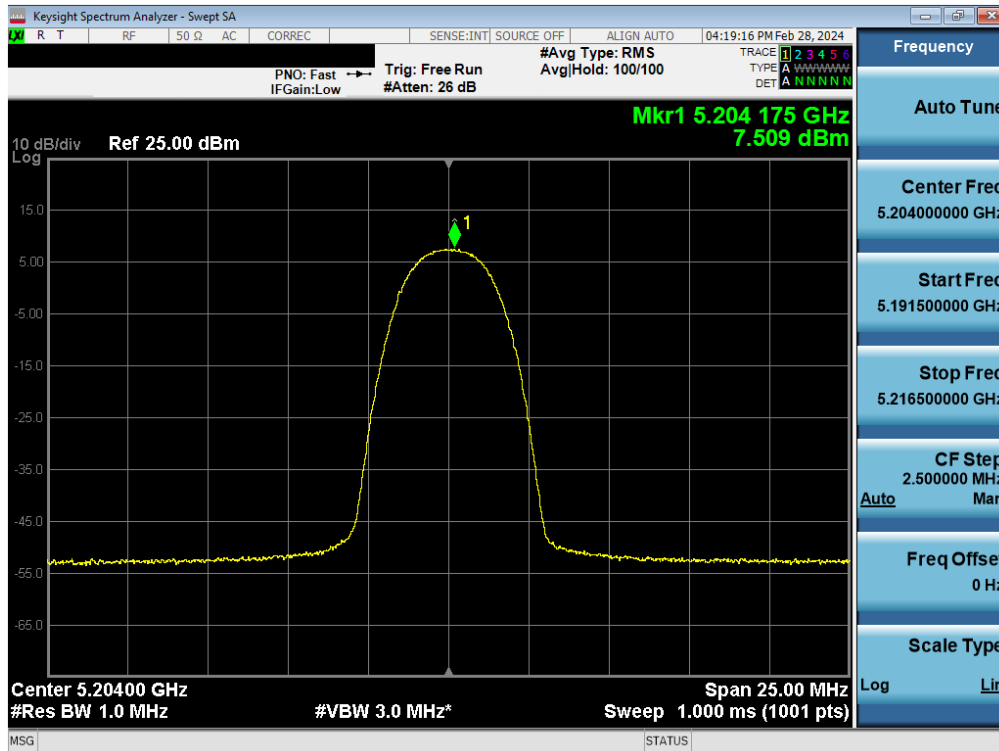


Plot 7-68. FCC PSD Antenna WF8 (HDR4, ePA – 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 70 of 179

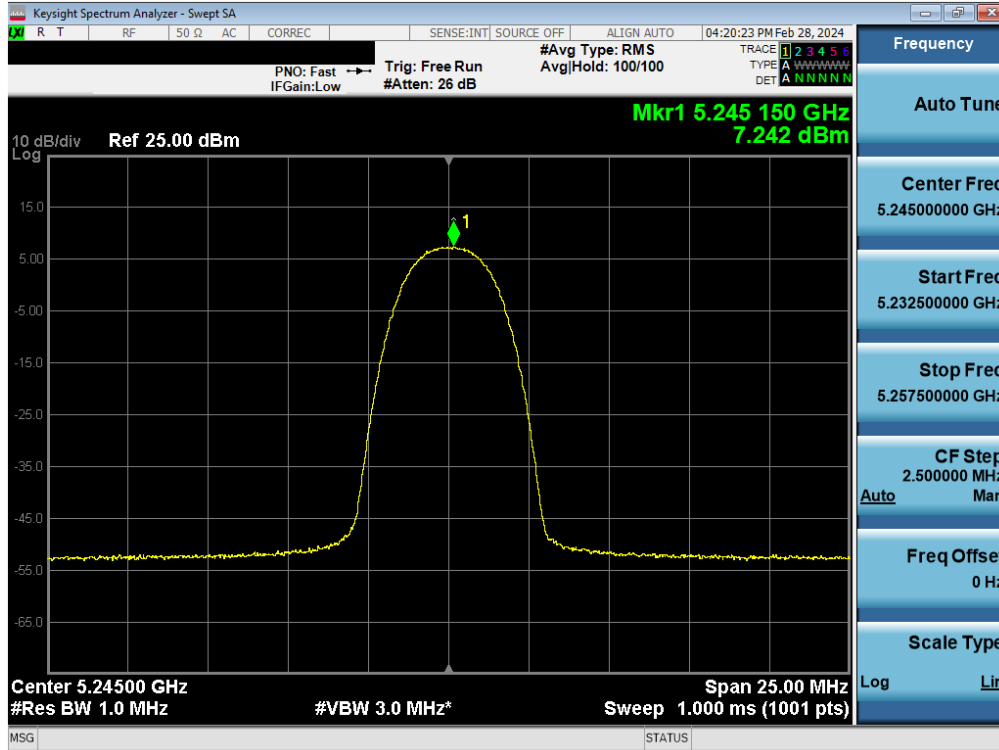


Plot 7-69. FCC PSD Antenna WF8 (HDR4, ePA- 5245MHz)

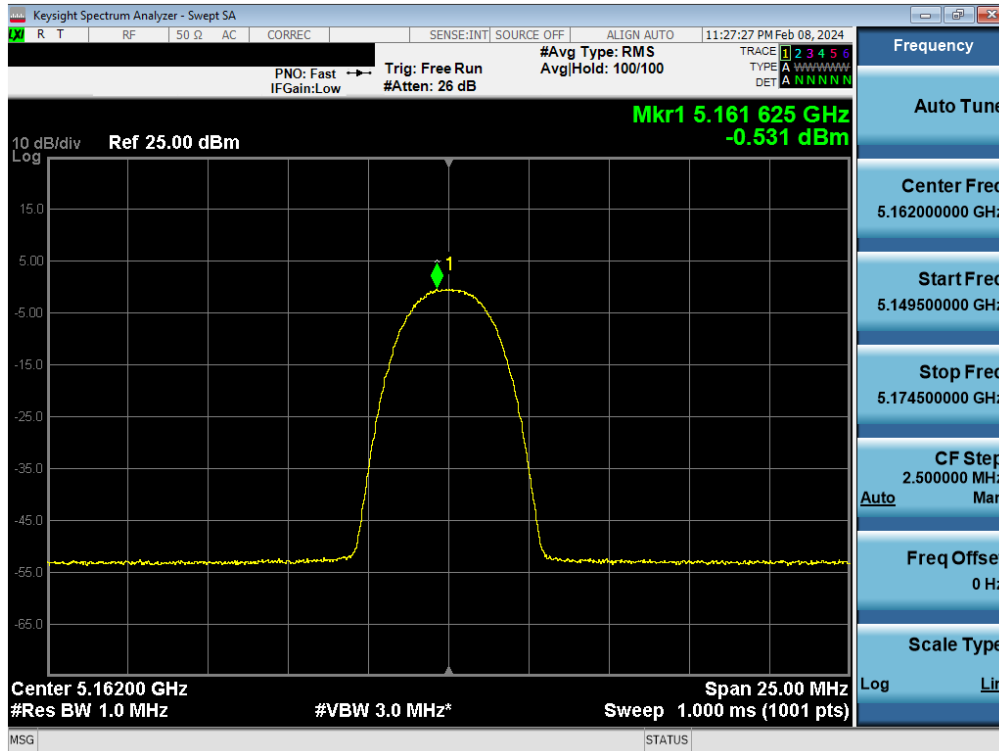


Plot 7-70. FCC/ISED PSD Antenna WF8 (HDR4, iPA - 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 71 of 179

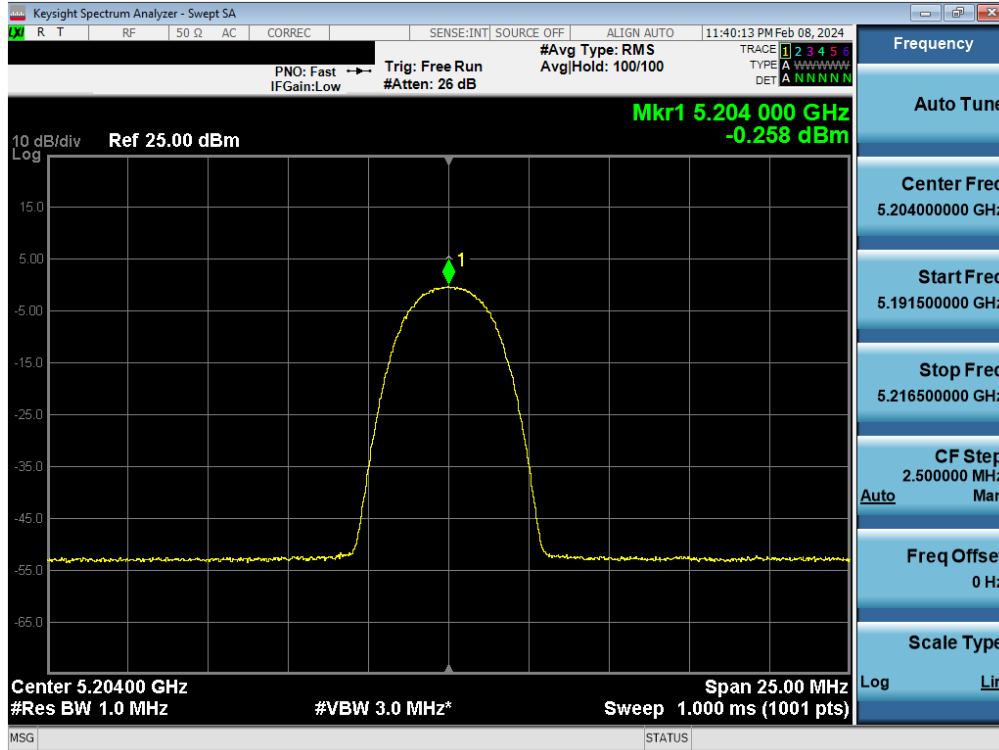


Plot 7-71. FCC/ISED PSD Antenna WF8 (HDR4, iPA – 5204MHz)

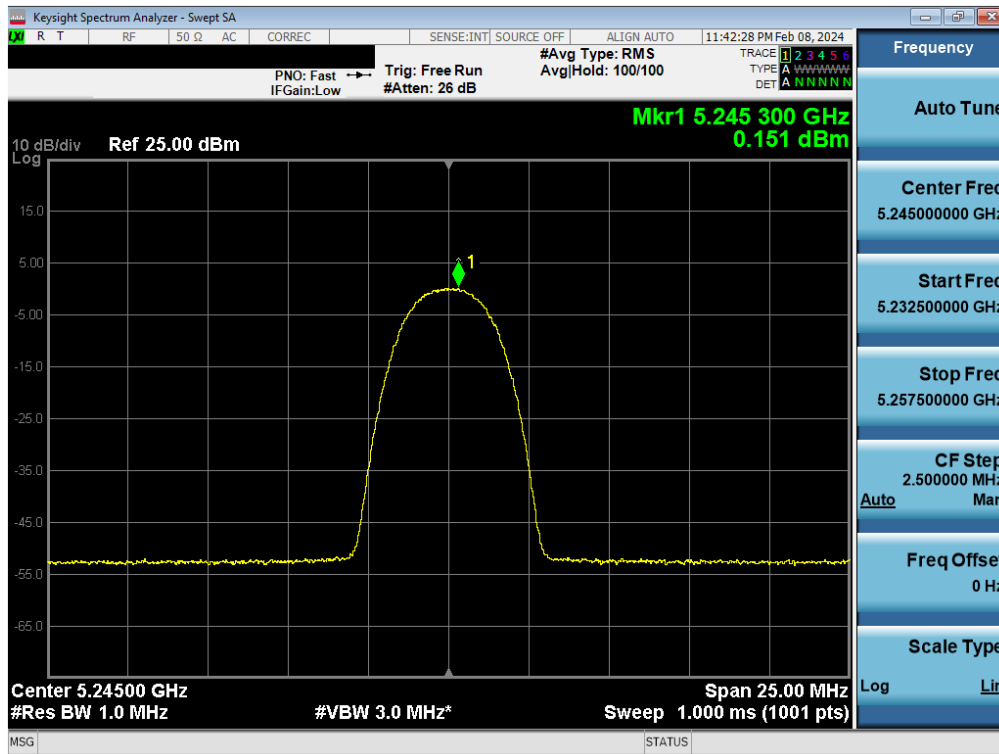


Plot 7-72. FCC/ISED PSD Antenna WF8 (HDR4, iPA– 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 72 of 179



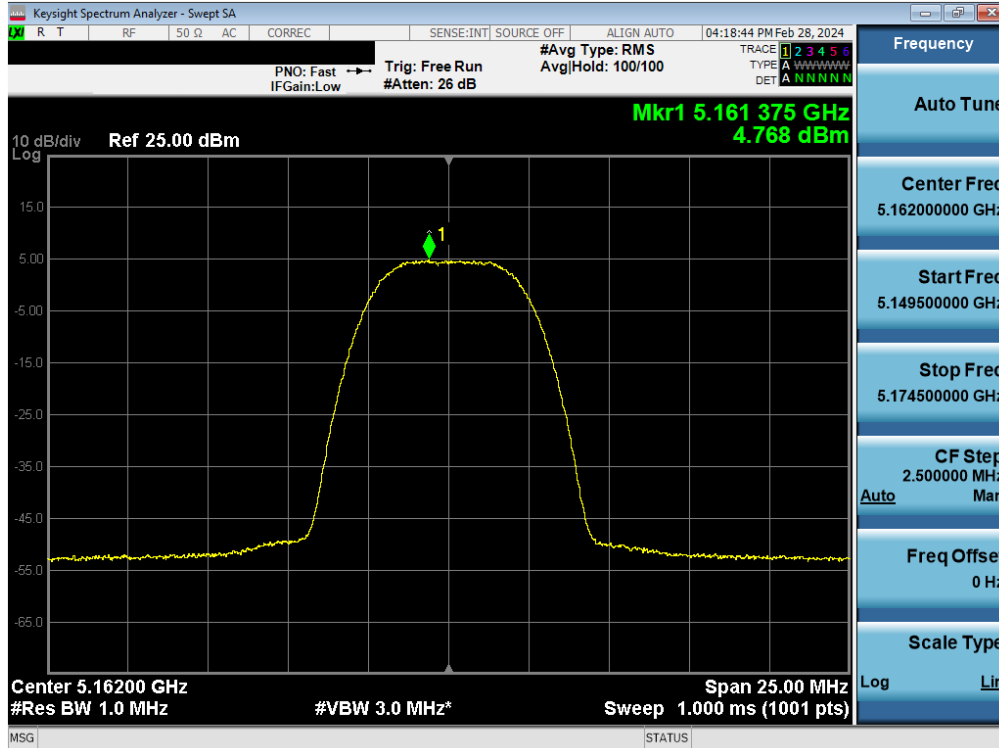


Plot 7-73. FCC/ISED PSD Antenna WF8 (HDR8, ePA – 5162MHz)

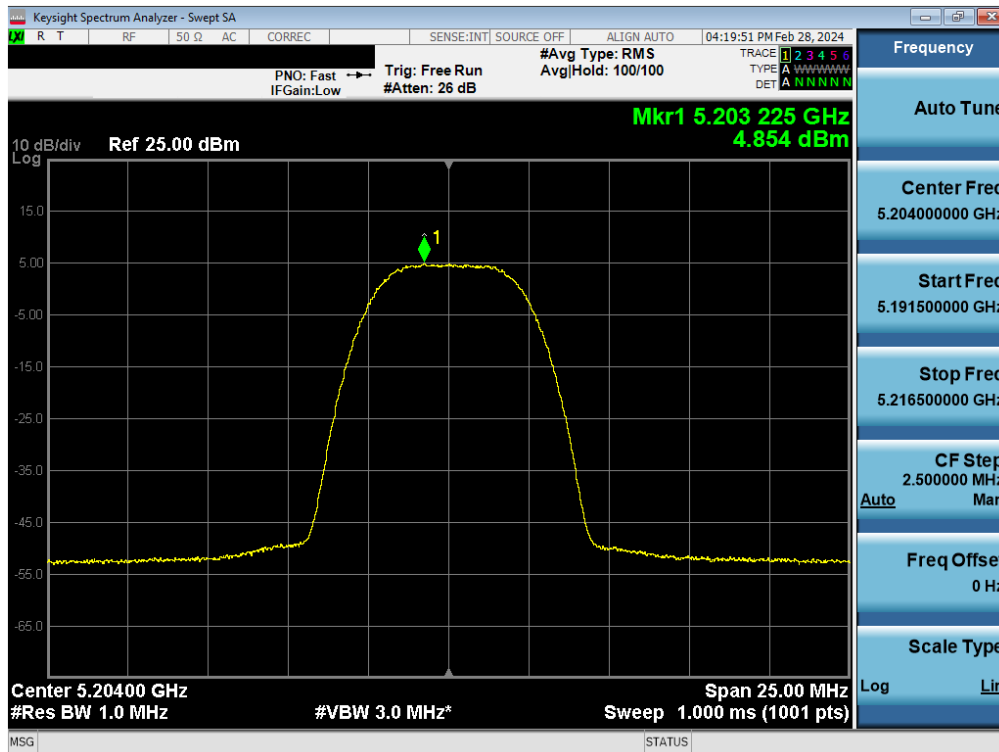


Plot 7-74. FCC/ISED PSD Antenna WF8 (HDR8, ePA – 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 73 of 179

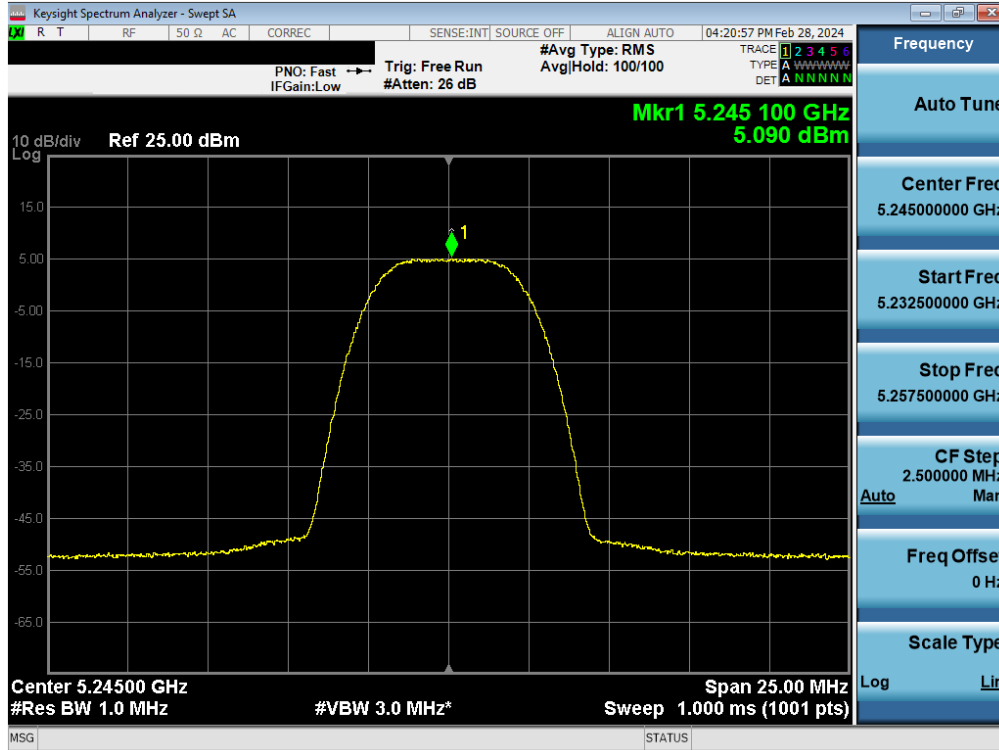


Plot 7-75. FCC/ISED PSD Antenna WF8 (HDR8, ePA- 5245MHz)

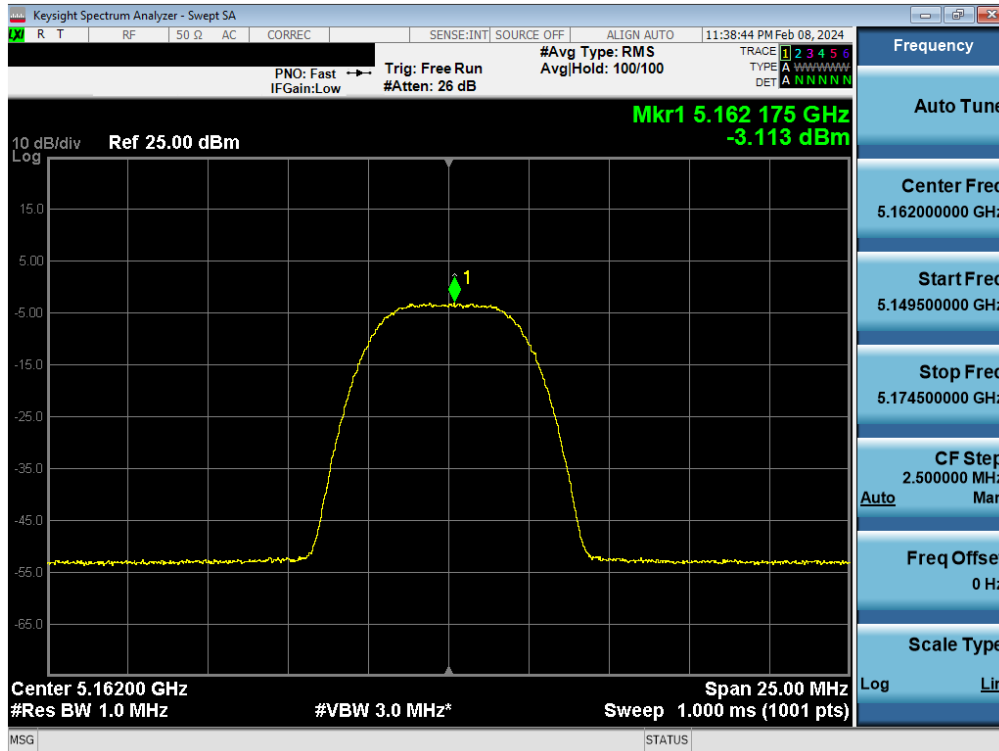


Plot 7-76. FCC/ISED PSD Antenna WF8 (HDR8, iPA - 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 74 of 179

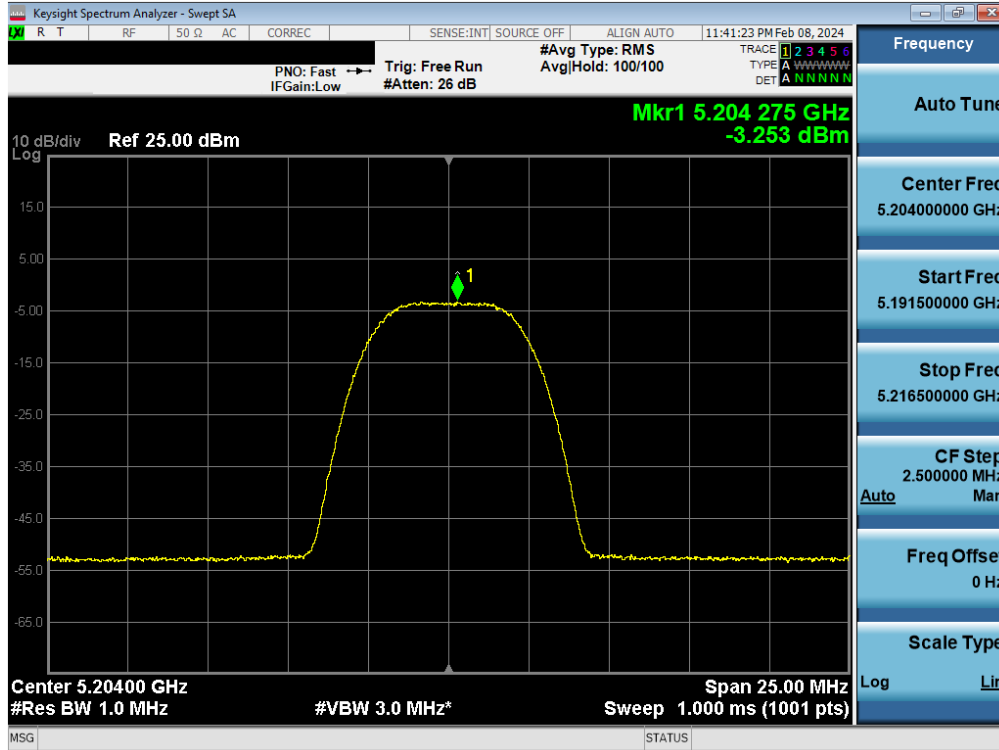


Plot 7-77. FCC/ISED PSD Antenna WF8 (HDR8, iPA – 5204MHz)

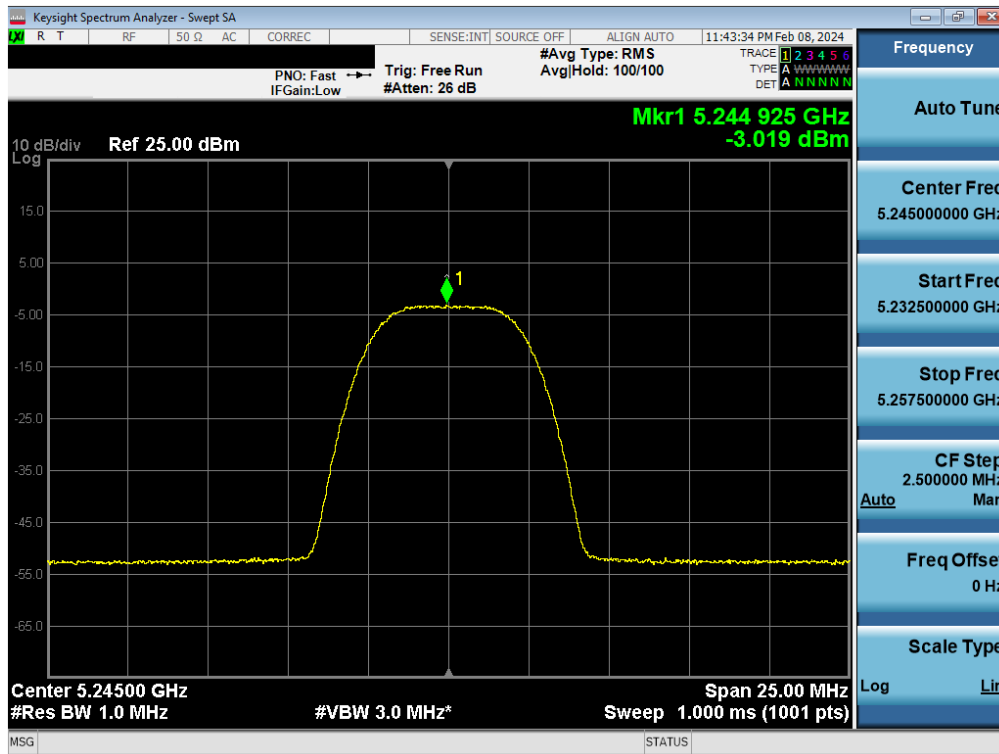


Plot 7-78. FCC/ISED PSD Antenna WF8 (HDR8, iPA– 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 75 of 179

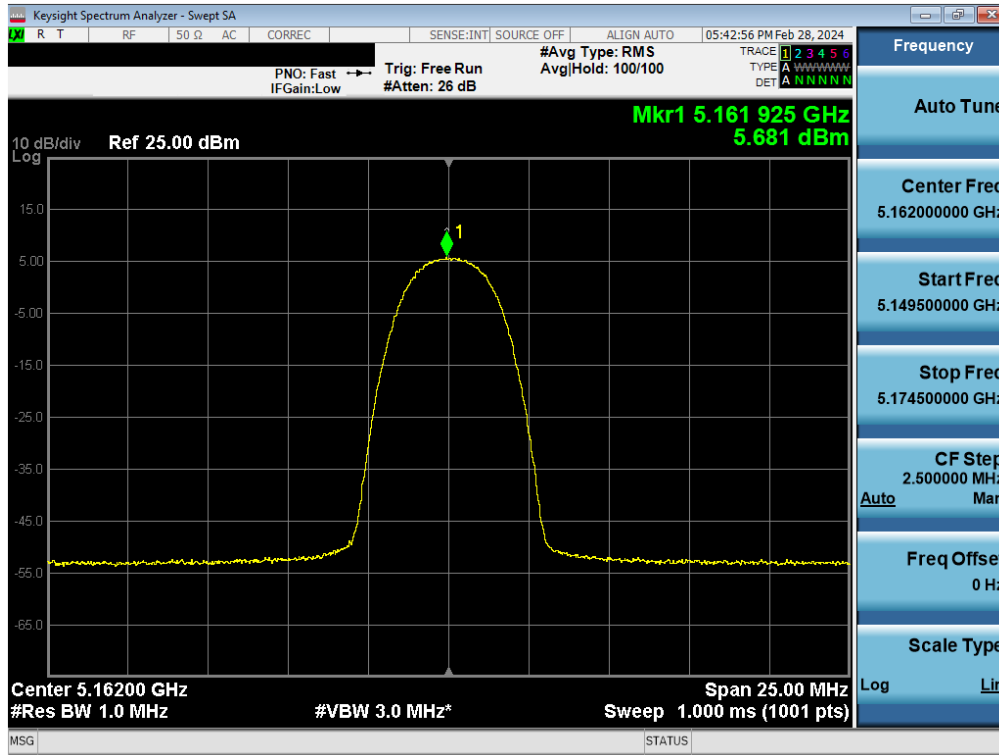


Plot 7-79. ISED PSD Antenna WF8 (HDR4, ePA – 5162MHz)

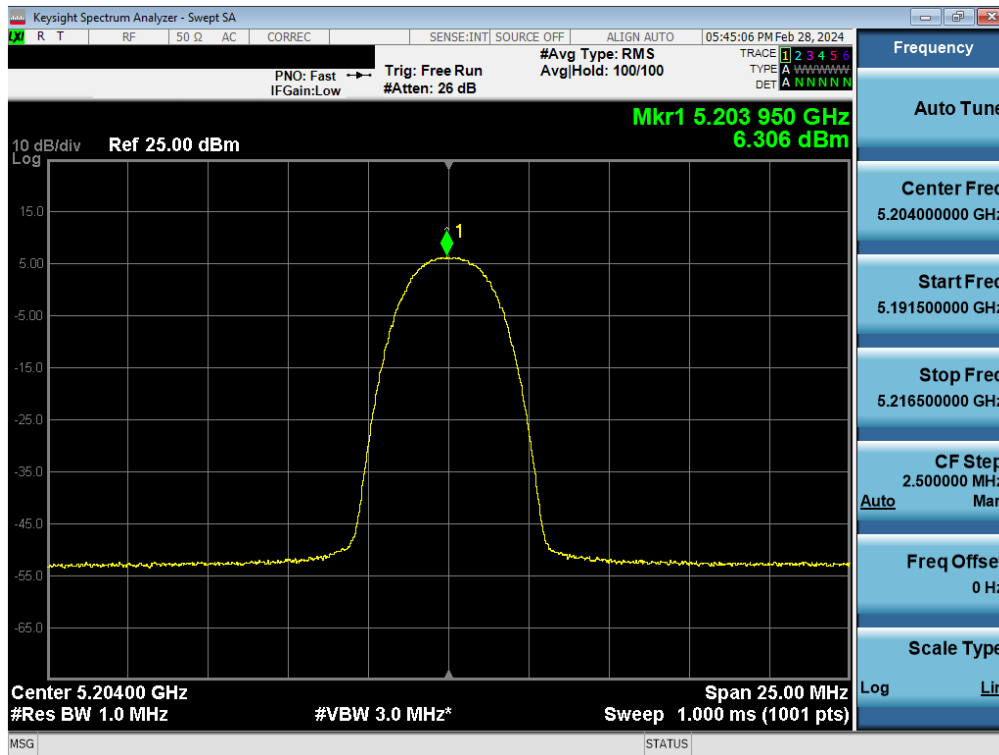

Plot 7-80. ISED PSD Antenna WF8 (HDR4, ePA – 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 76 of 179

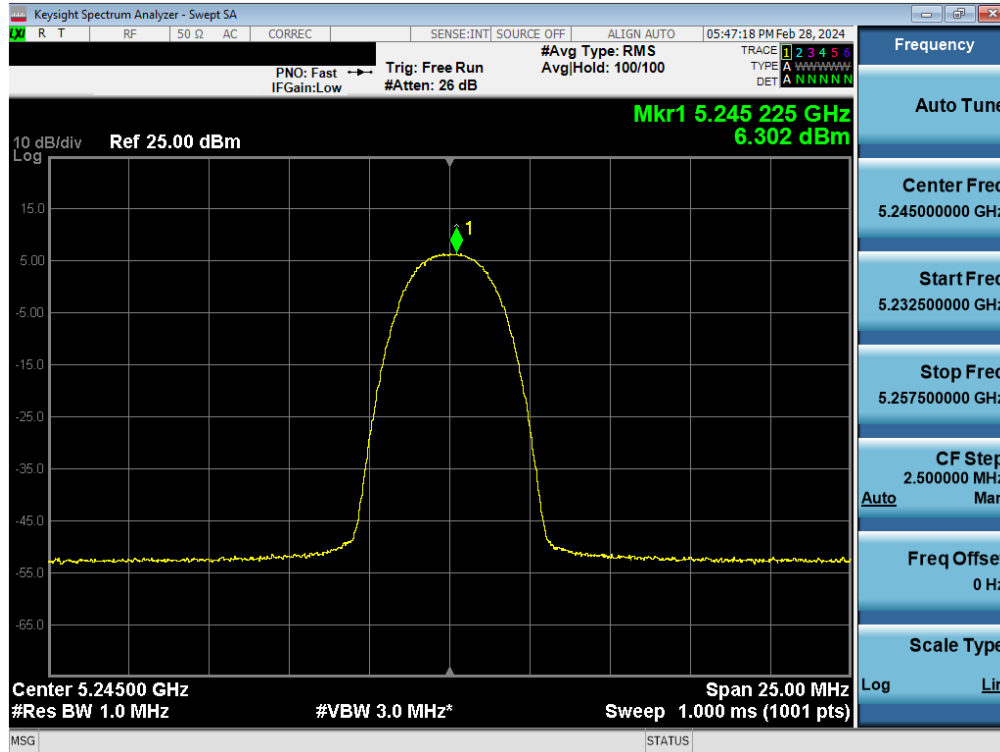


Plot 7-81. ISED PSD Antenna WF8 (HDR4, ePA- 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 77 of 179


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5733	4.0	HDR4	ePA	4.09	30.00	-25.91
	5789	4.0	HDR4	ePA	4.01	30.00	-25.99
	5844	4.0	HDR4	ePA	4.29	30.00	-25.71
	5733	4.0	HDR4	iPA	-3.85	30.00	-33.85
	5789	4.0	HDR4	iPA	-3.92	30.00	-33.92
	5844	4.0	HDR4	iPA	-3.01	30.00	-33.01
	5733	8.0	HDR8	ePA	1.19	30.00	-28.81
	5789	8.0	HDR8	ePA	0.75	30.00	-29.25
	5844	8.0	HDR8	ePA	1.41	30.00	-28.59
	5733	8.0	HDR8	iPA	-6.85	30.00	-36.85
	5789	8.0	HDR8	iPA	-6.75	30.00	-36.75
	5844	8.0	HDR8	iPA	-6.48	30.00	-36.48

Table 7-21. Power Spectral Density Measurements Antenna WF8

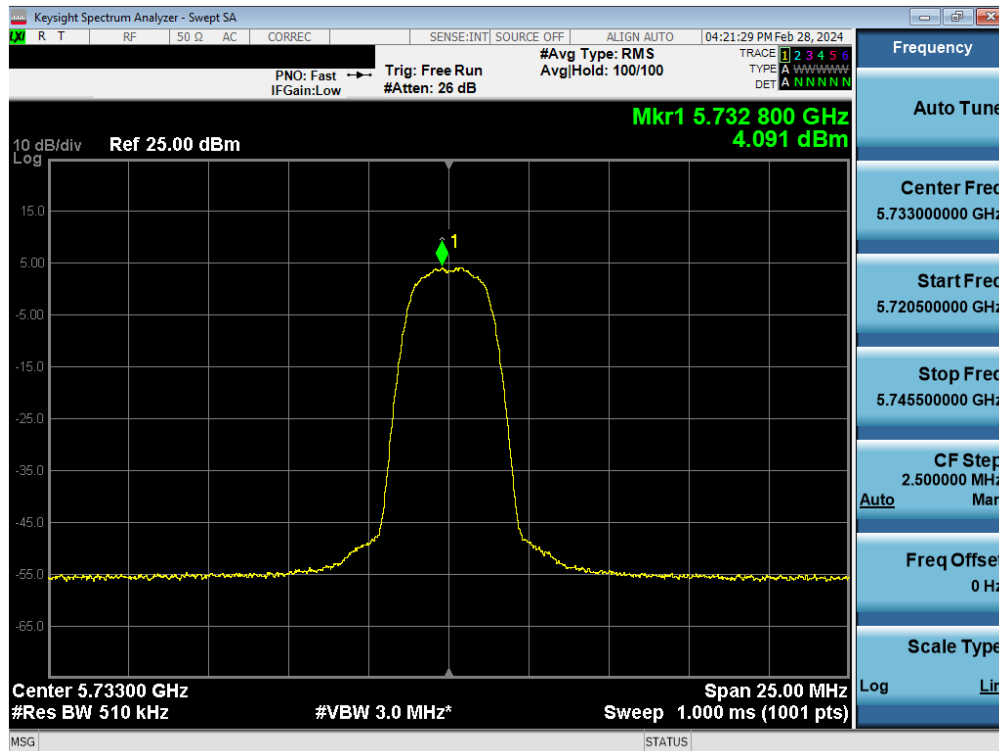


Plot 7-82. PSD Antenna WF8 (HDR4, ePA 5733MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 78 of 179

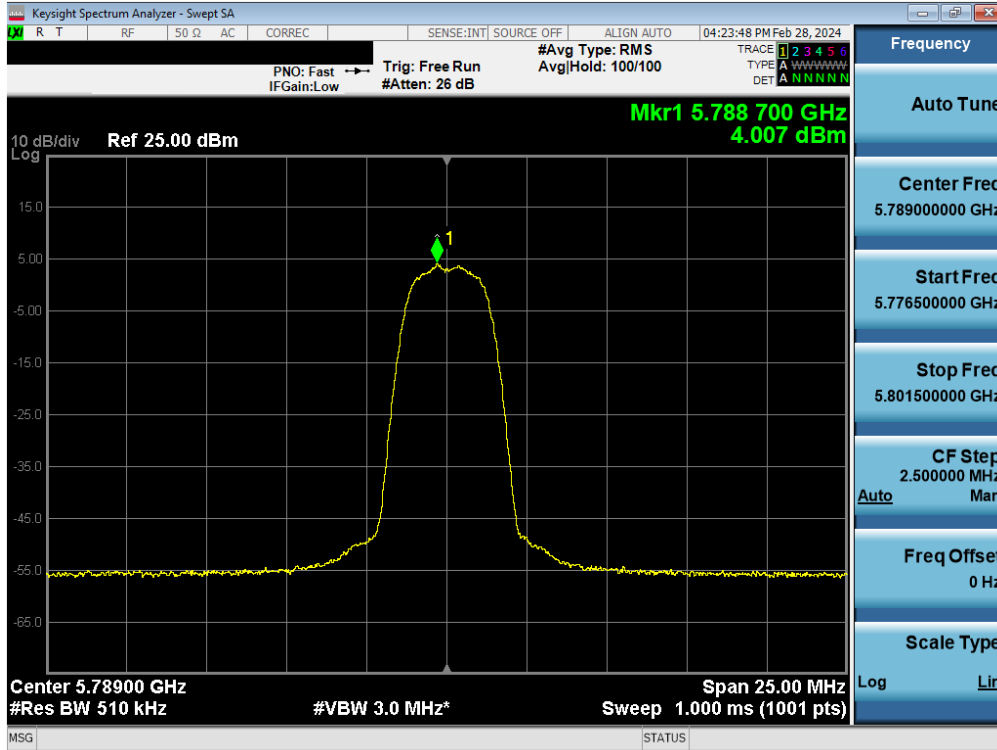


Plot 7-83. PSD Antenna WF8 (HDR4, ePA 5789MHz)

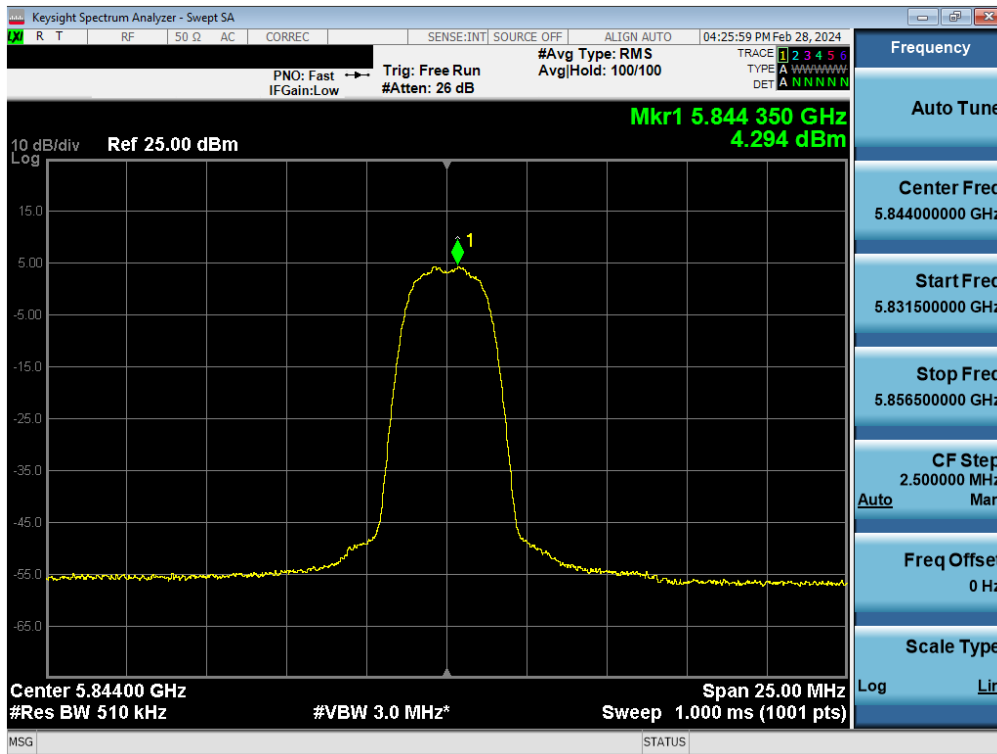


Plot 7-84. PSD Antenna WF8 (HDR4, ePA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 79 of 179

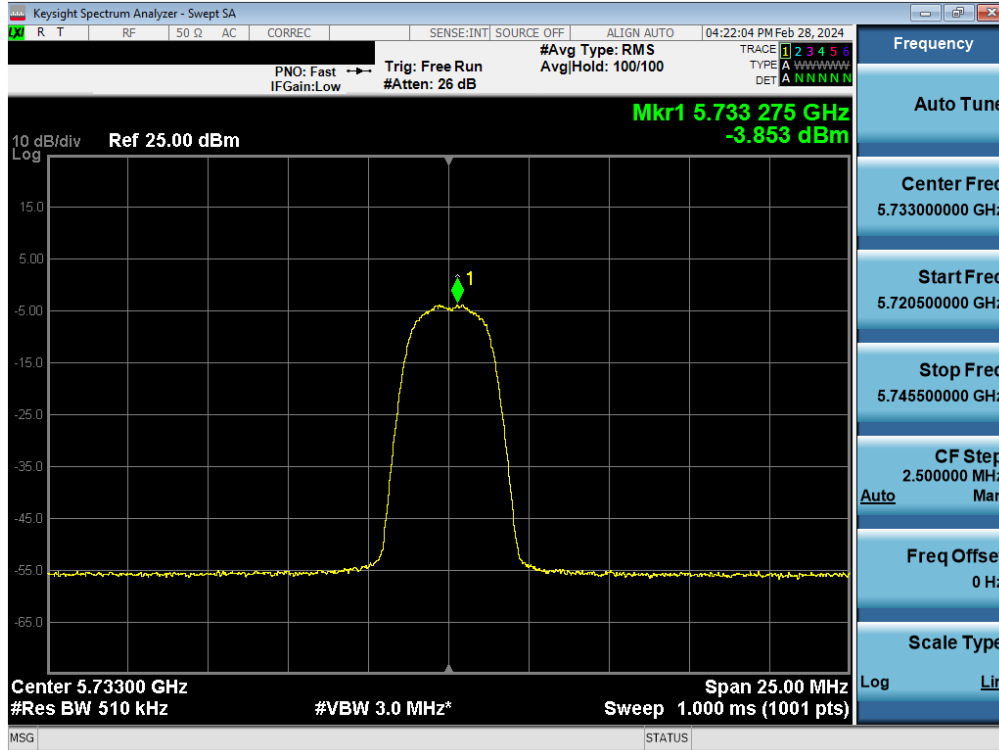


Plot 7-85. PSD Antenna WF8 (HDR4, iPA 5733MHz)

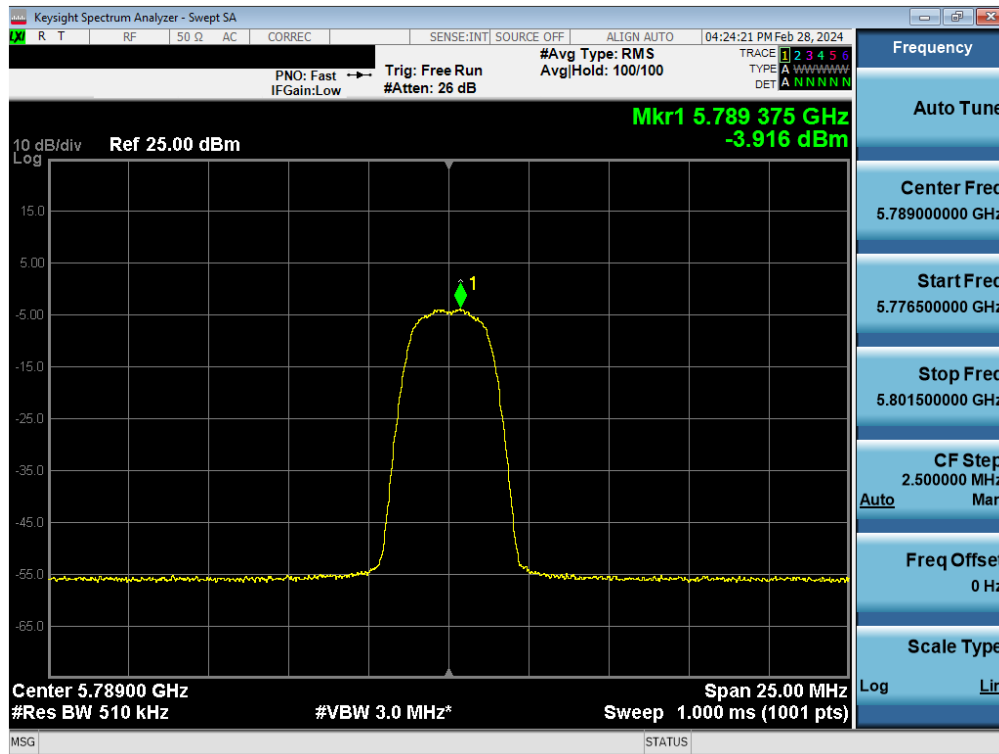


Plot 7-86. PSD Antenna WF8 (HDR4, iPA 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 80 of 179



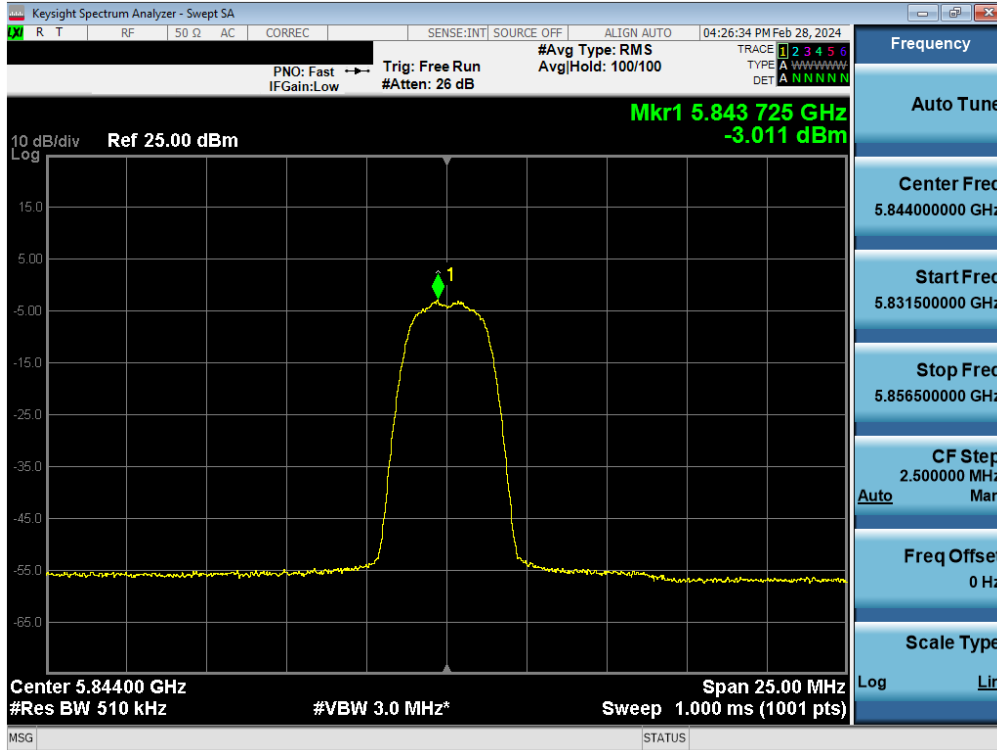


Plot 7-87. PSD Antenna WF8 (HDR4, iPA 5844MHz)

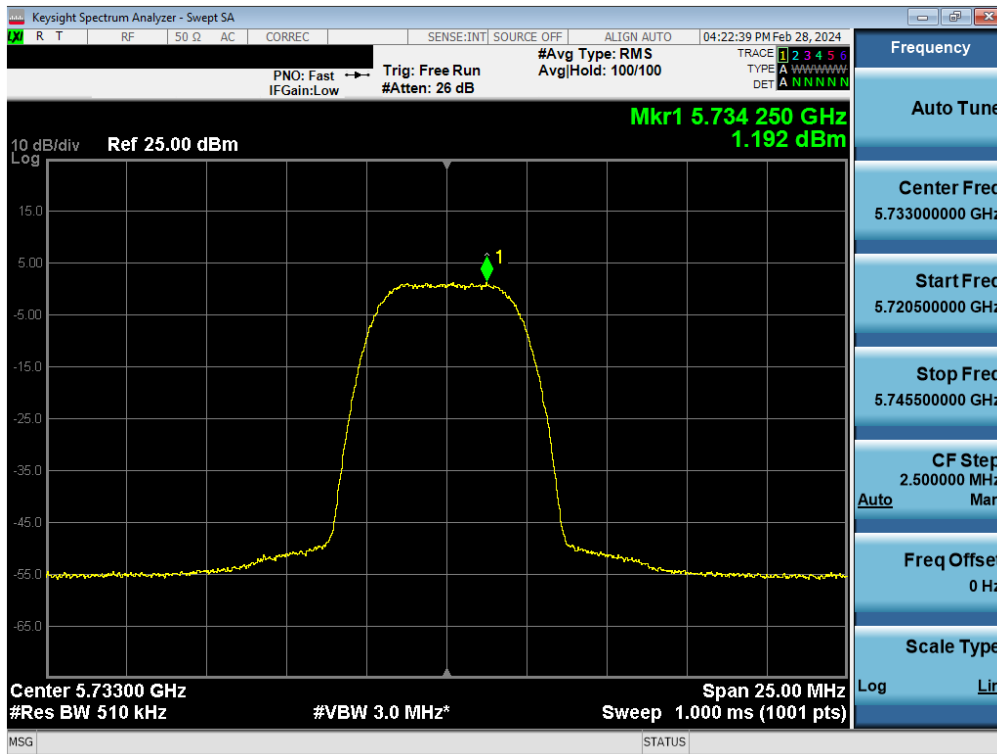


Plot 7-88. PSD Antenna WF8 (HDR8, ePA 5733MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 81 of 179

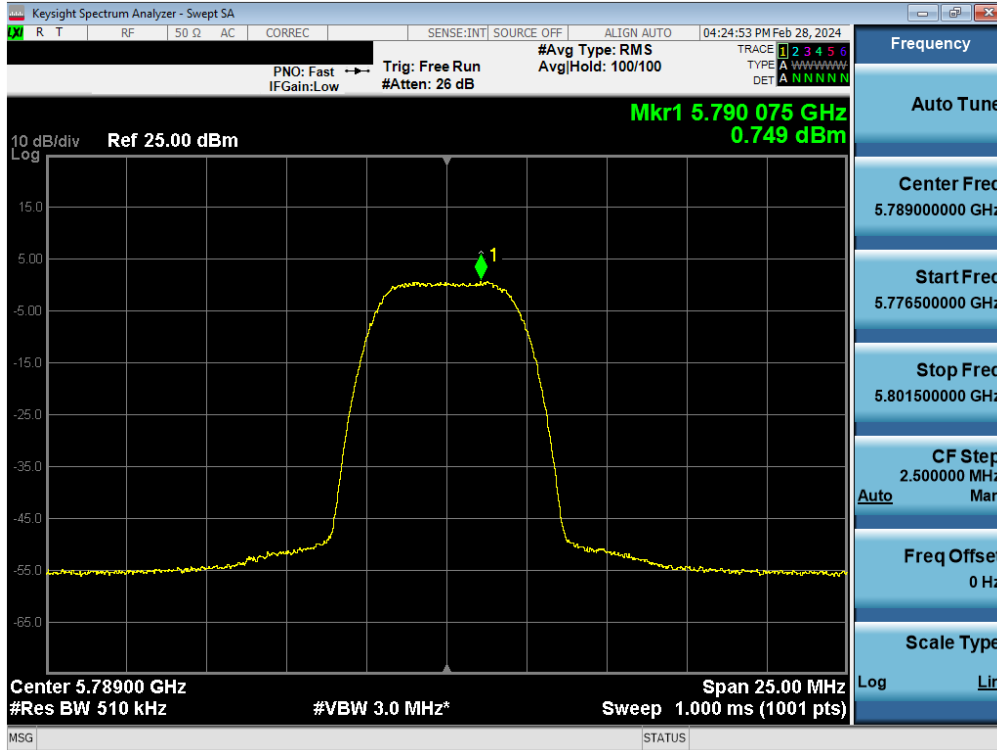


Plot 7-89. PSD Antenna WF8 (HDR8, ePA 5789MHz)

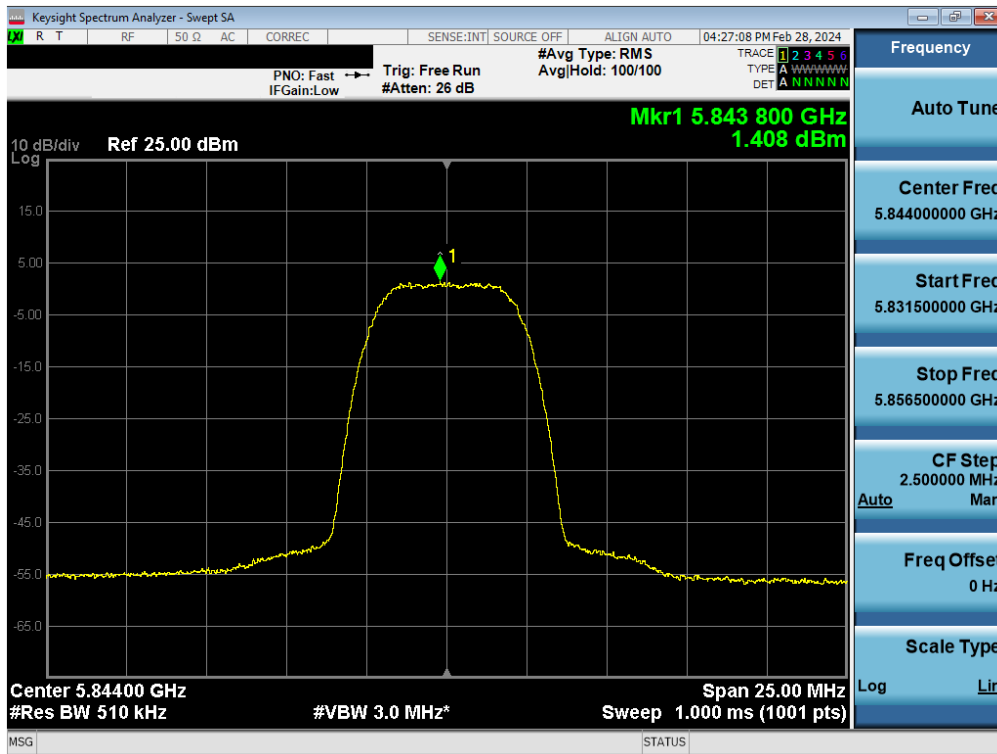


Plot 7-90. PSD Antenna WF8 (HDR8, ePA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 82 of 179

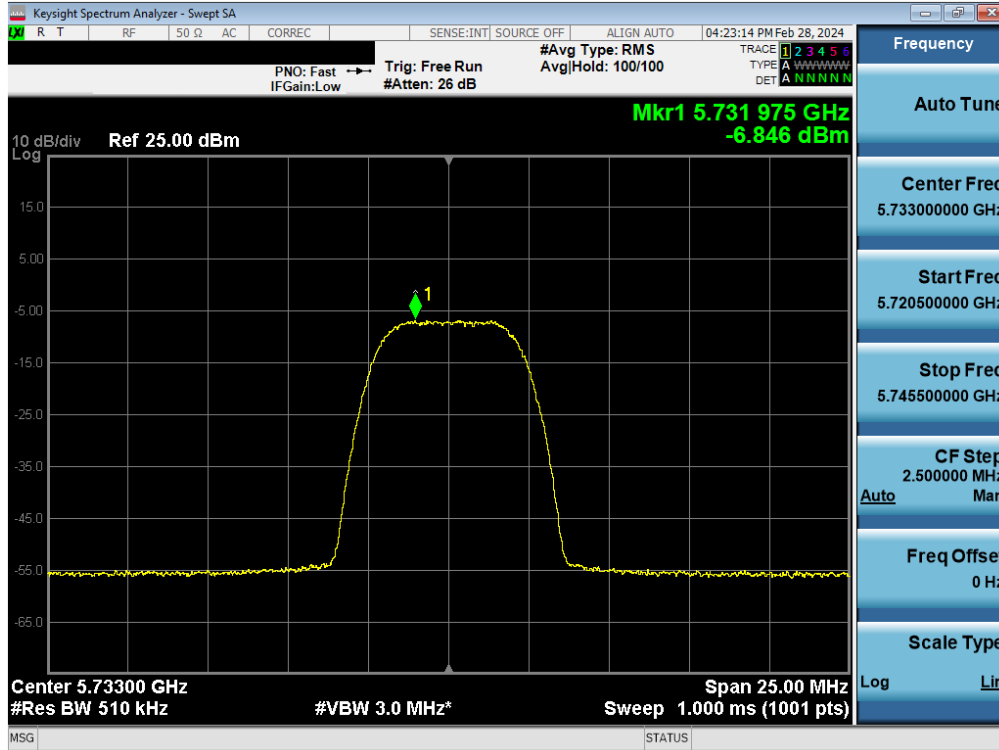


Plot 7-91. PSD Antenna WF8 (HDR8, iPA 5733MHz)

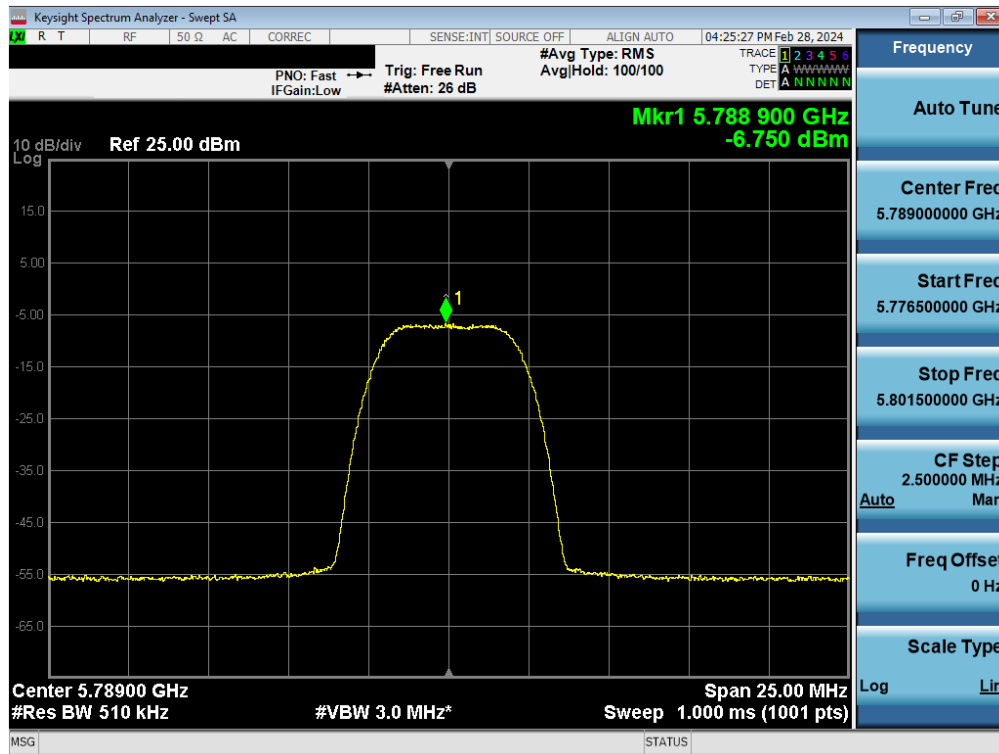

Plot 7-92. PSD Antenna WF8 (HDR8, iPA 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 83 of 179

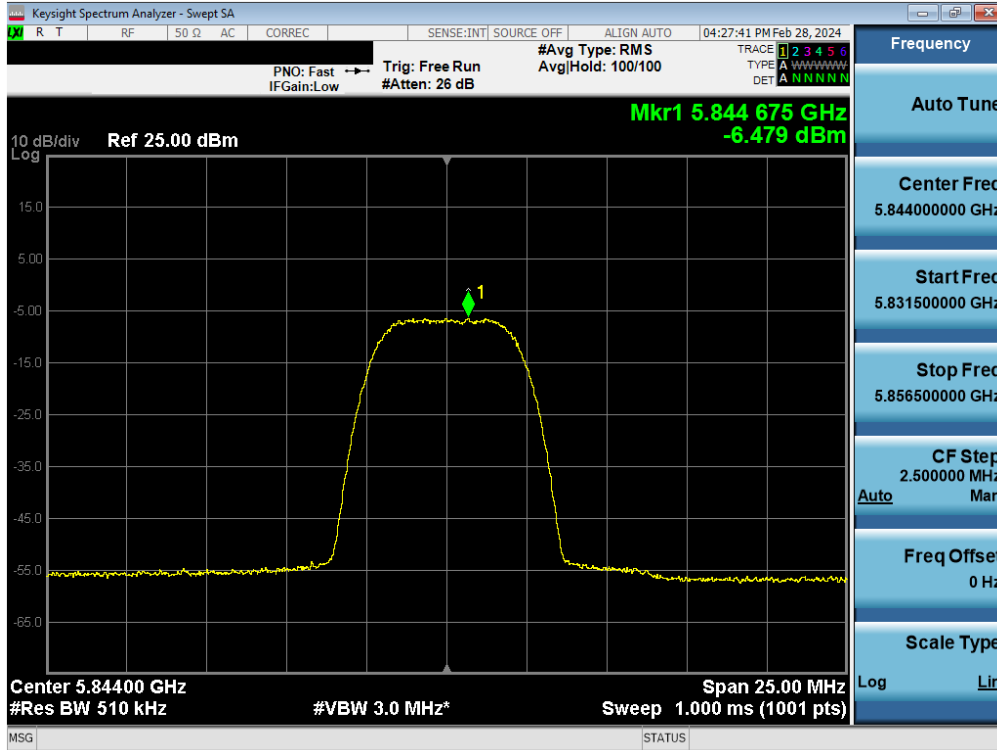

Plot 7-93. PSD Antenna WF8 (HDR8, iPA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 84 of 179

### 7.4.3 Antenna WF7 Power Spectral Density Measurements


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5162	4.0	HDR4	ePA	5.72	11.00	-5.28
	5204	4.0	HDR4	ePA	6.70	11.00	-4.30
	5245	4.0	HDR4	ePA	6.11	11.00	-4.89
	5162	4.0	HDR4	iPA	-0.88	11.00	-11.88
	5204	4.0	HDR4	iPA	-0.51	11.00	-11.51
	5245	4.0	HDR4	iPA	0.15	11.00	-10.85
	5162	8.0	HDR8	ePA	3.41	11.00	-7.59
	5204	8.0	HDR8	ePA	3.64	11.00	-7.36
	5245	8.0	HDR8	ePA	3.98	11.00	-7.02
	5162	8.0	HDR8	iPA	-2.75	11.00	-13.75
	5204	8.0	HDR8	iPA	-3.15	11.00	-14.15
	5245	8.0	HDR8	iPA	-3.07	11.00	-14.07

Table 7-22. FCC Power Spectral Density Measurements Antenna WF7


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5162	4.0	HDR4	ePA	5.72	-2.00	3.72	10.00	-6.28
	5204	4.0	HDR4	ePA	6.70	-2.00	4.70	10.00	-5.30
	5245	4.0	HDR4	ePA	6.11	-2.00	4.11	10.00	-5.89
	5162	4.0	HDR4	iPA	-0.88	-2.00	-2.88	10.00	-12.88
	5204	4.0	HDR4	iPA	-0.51	-2.00	-2.51	10.00	-12.51
	5245	4.0	HDR4	iPA	0.15	-2.00	-1.85	10.00	-11.85
	5162	8.0	HDR8	ePA	3.41	-2.00	1.41	10.00	-8.59
	5204	8.0	HDR8	ePA	3.64	-2.00	1.64	10.00	-8.36
	5245	8.0	HDR8	ePA	3.98	-2.00	1.98	10.00	-8.02
	5162	8.0	HDR8	iPA	-2.75	-2.00	-4.75	10.00	-14.75
	5204	8.0	HDR8	iPA	-3.15	-2.00	-5.15	10.00	-15.15
	5245	8.0	HDR8	iPA	-3.07	-2.00	-5.07	10.00	-15.07

Table 7-23. ISED Power Spectral Density Measurements Antenna WF7

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 85 of 179

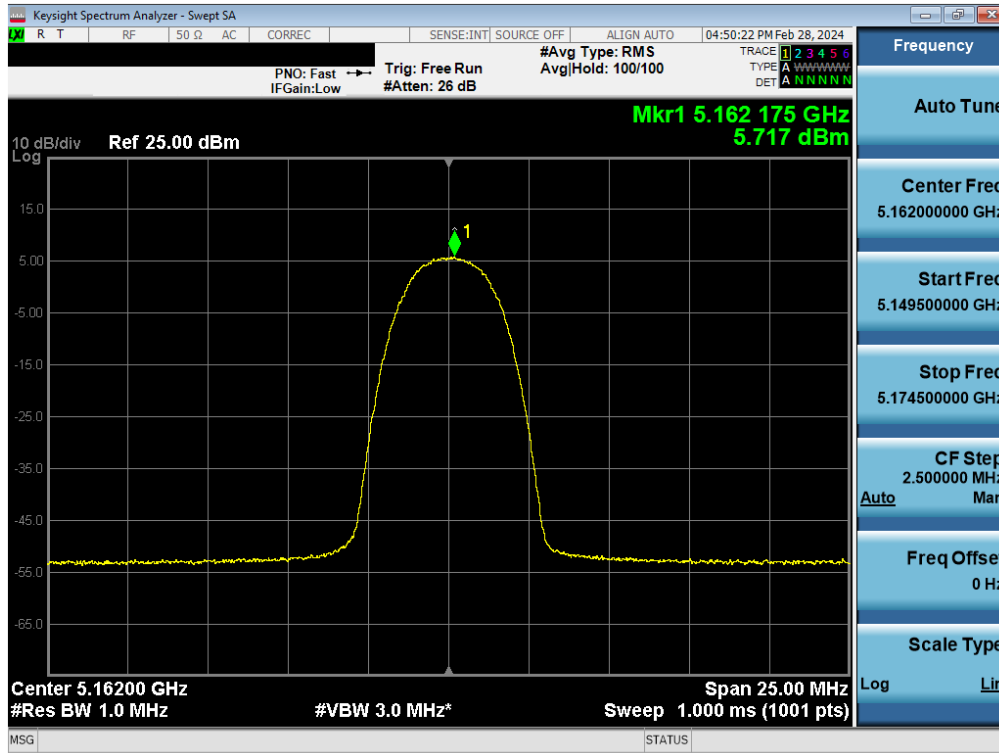


Plot 7-94. PSD Antenna WF7 (HDR4, ePA – 5162MHz)

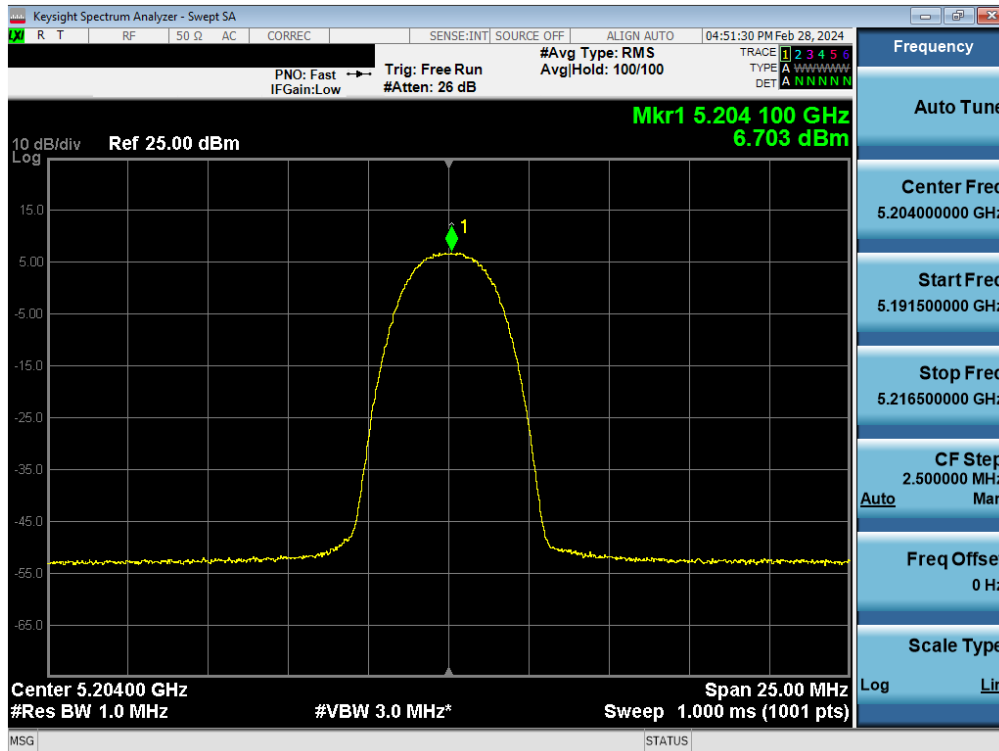


Plot 7-95. PSD Antenna WF7 (HDR4, ePA – 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 86 of 179

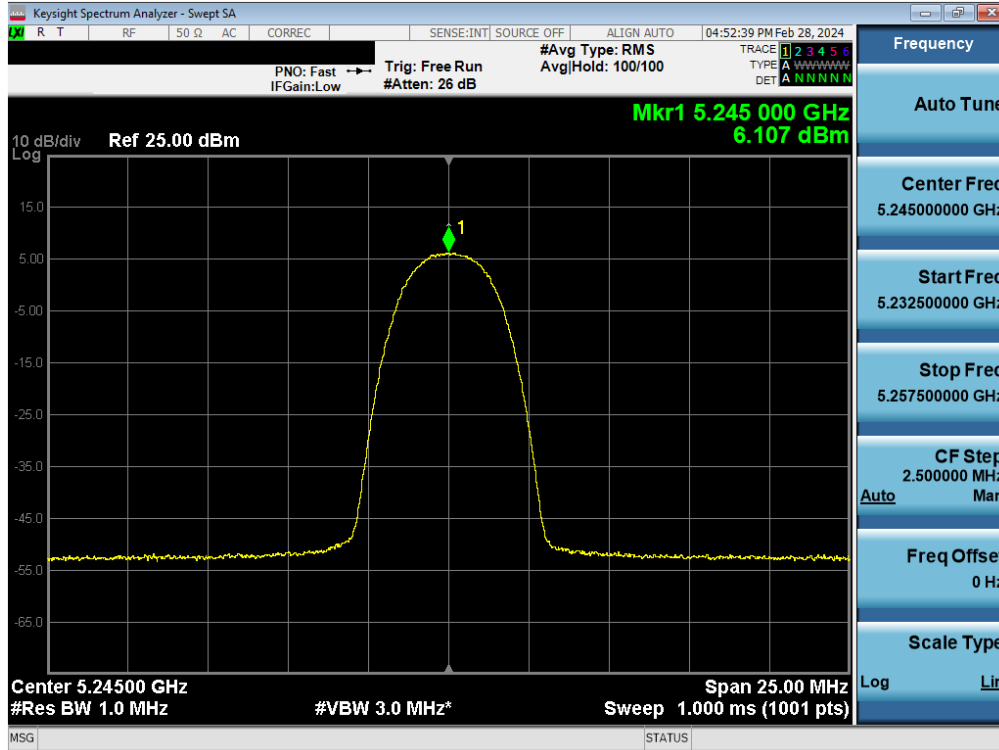


Plot 7-96. PSD Antenna WF7 (HDR4, ePA– 5245MHz)

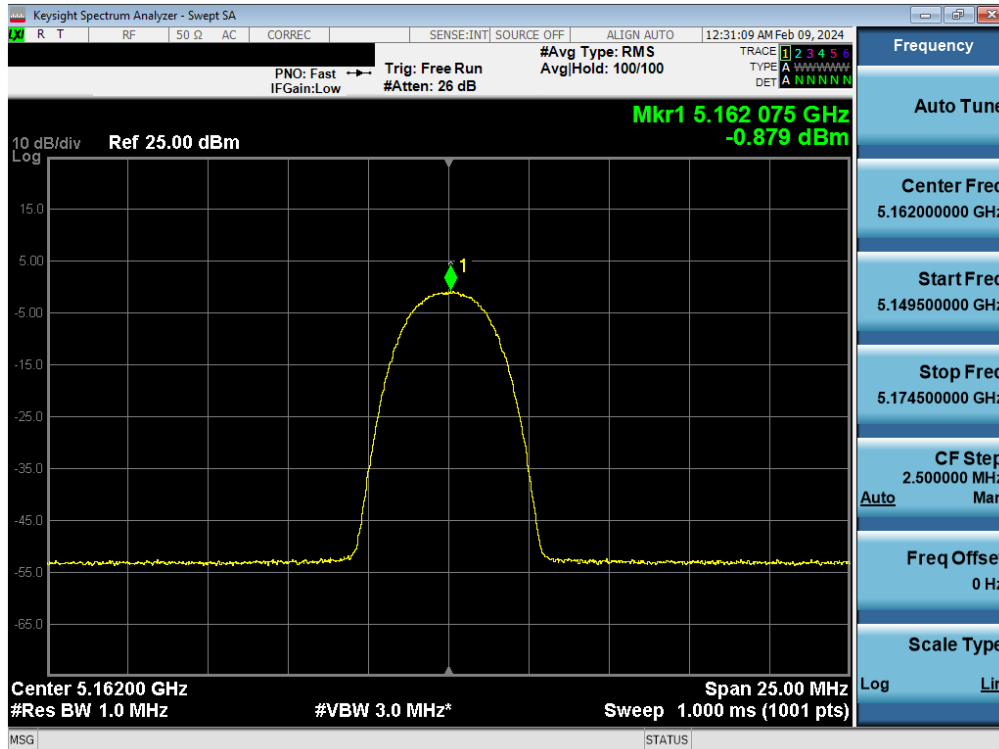


Plot 7-97. PSD Antenna WF7 (HDR4, iPA – 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 87 of 179

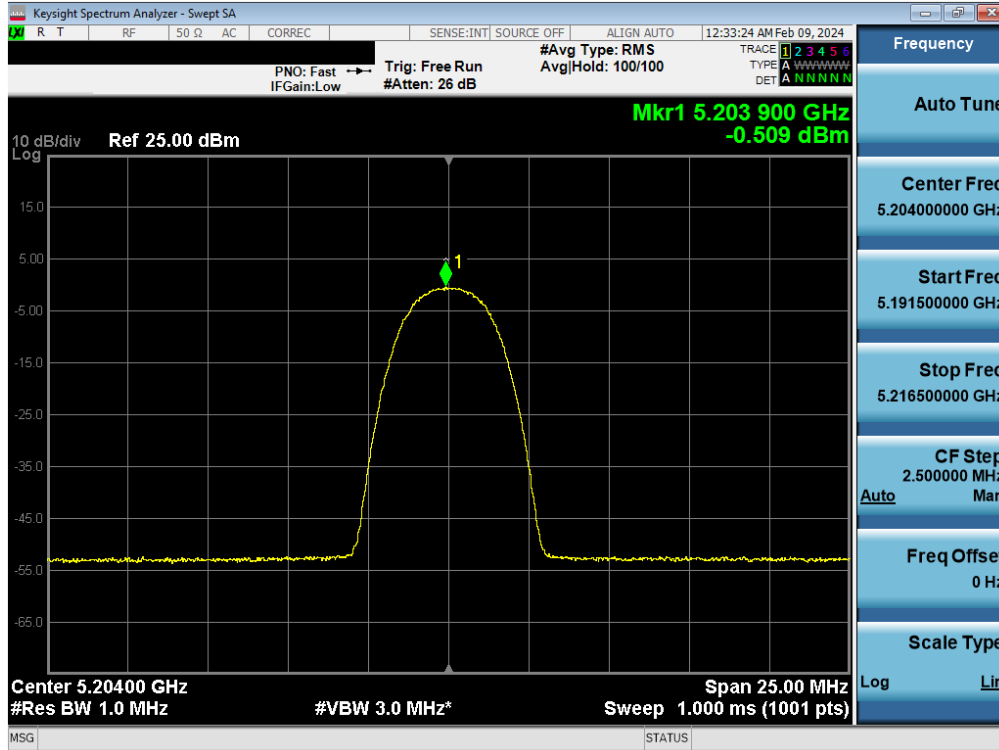


Plot 7-98. PSD Antenna WF7 (HDR4, iPA – 5204MHz)

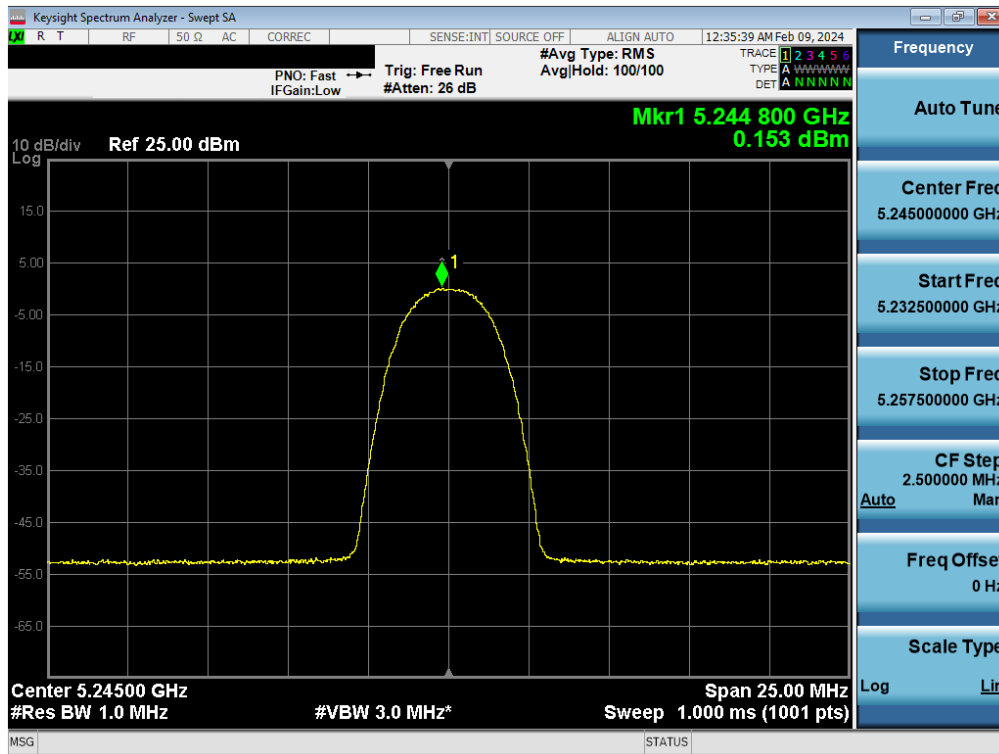


Plot 7-99. PSD Antenna WF7 (HDR4, iPA– 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 88 of 179



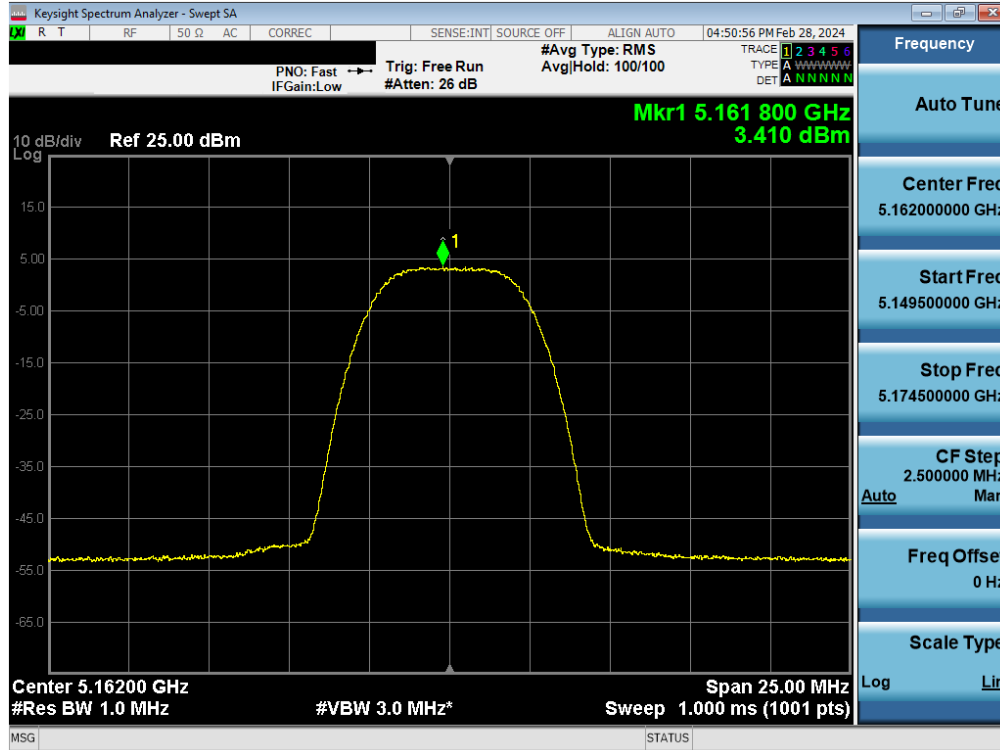


Plot 7-100. PSD Antenna WF7 (HDR8, ePA – 5162MHz)

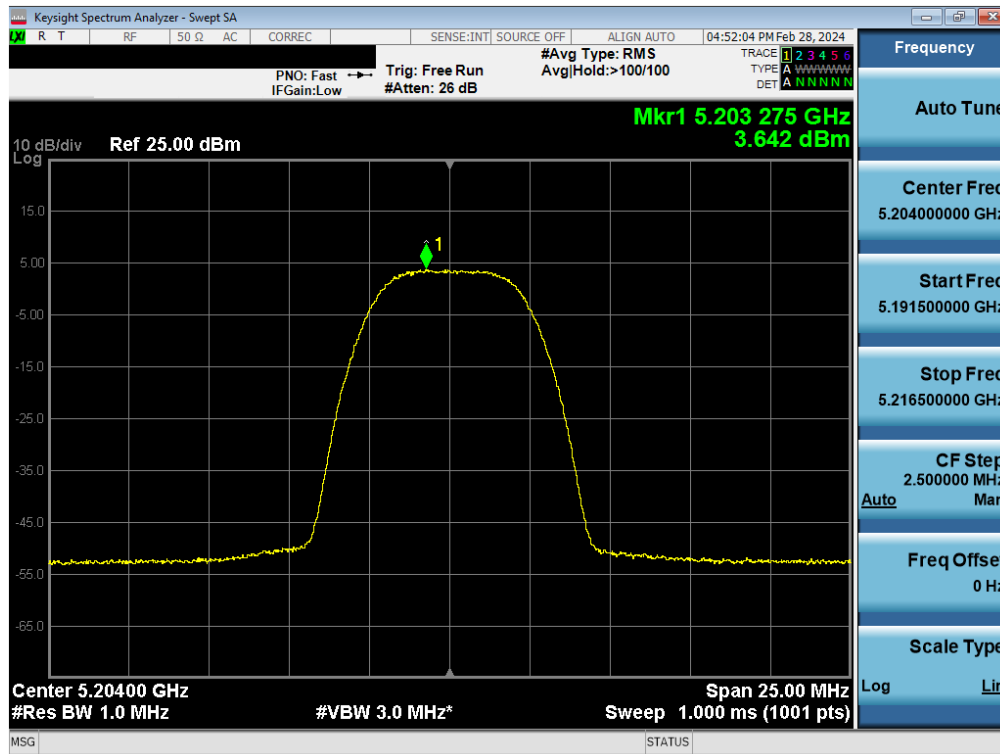


Plot 7-101. PSD Antenna WF7 (HDR8, ePA – 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 89 of 179

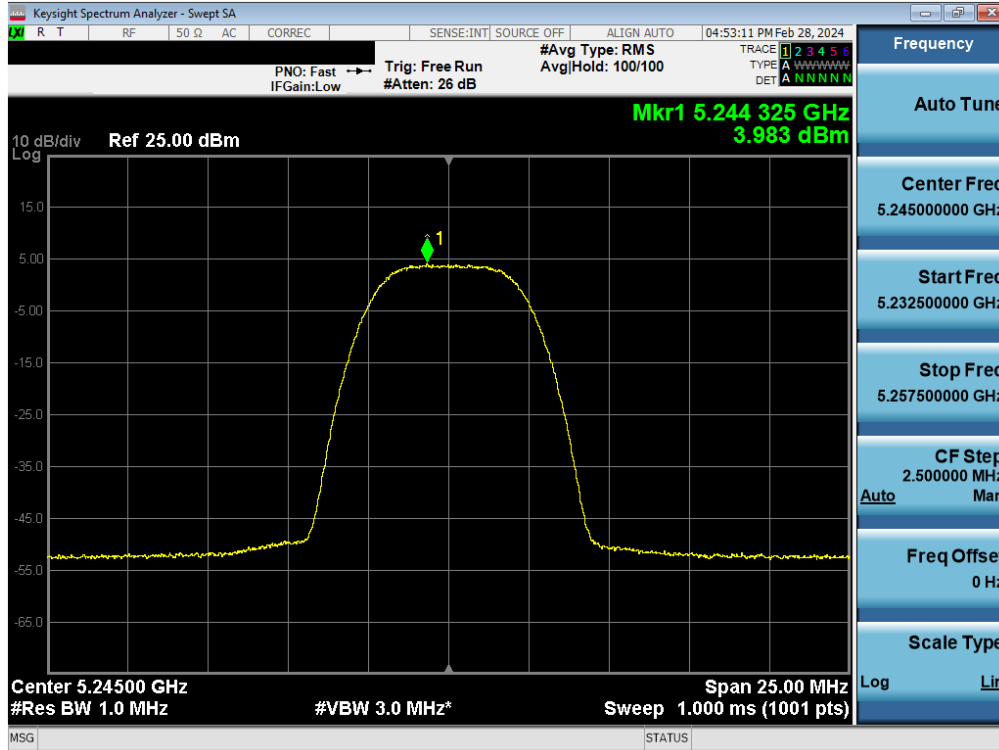


Plot 7-102. PSD Antenna WF7 (HDR8, ePA– 5245MHz)

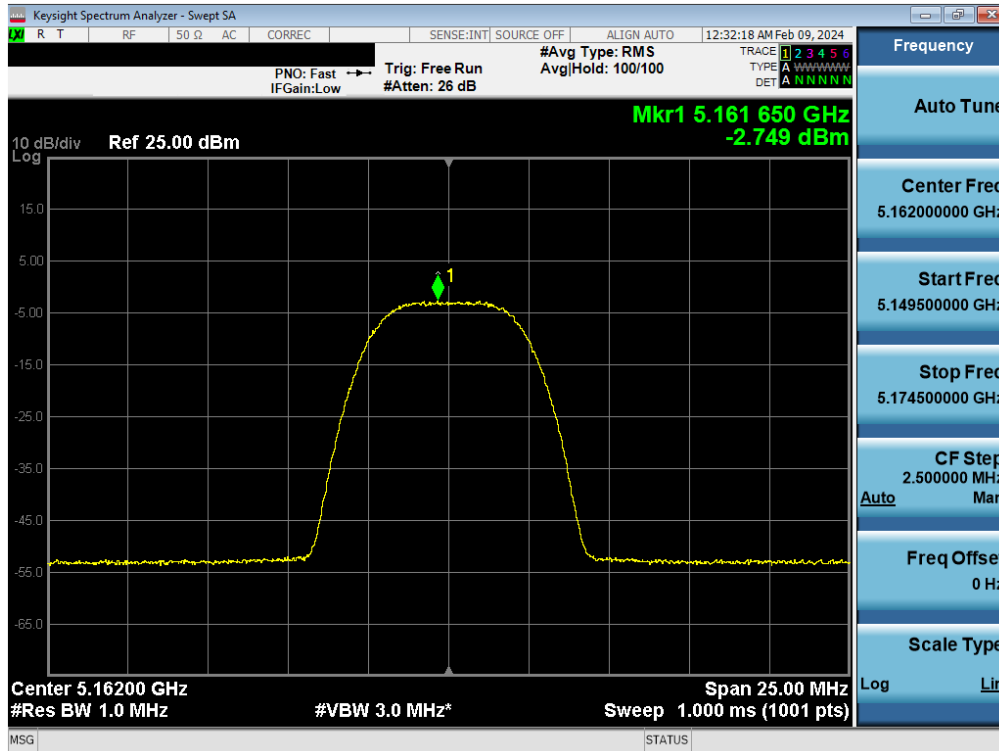


Plot 7-103. PSD Antenna WF7 (HDR8, iPA – 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 90 of 179

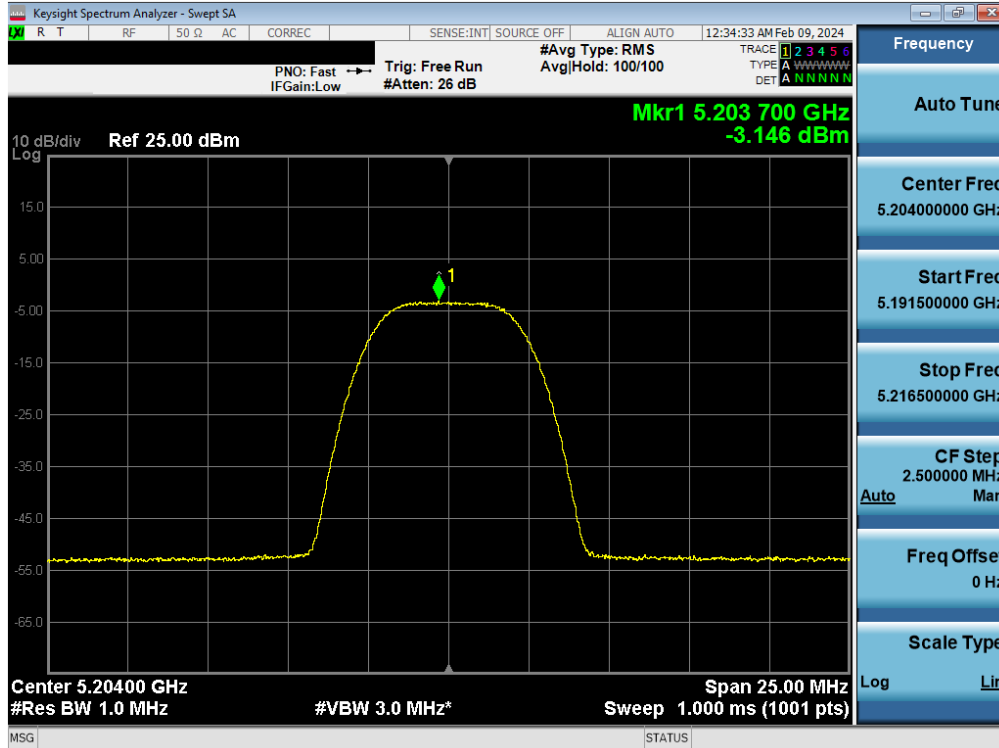

Plot 7-104. PSD Antenna WF7 (HNR8, iPA – 5204MHz)

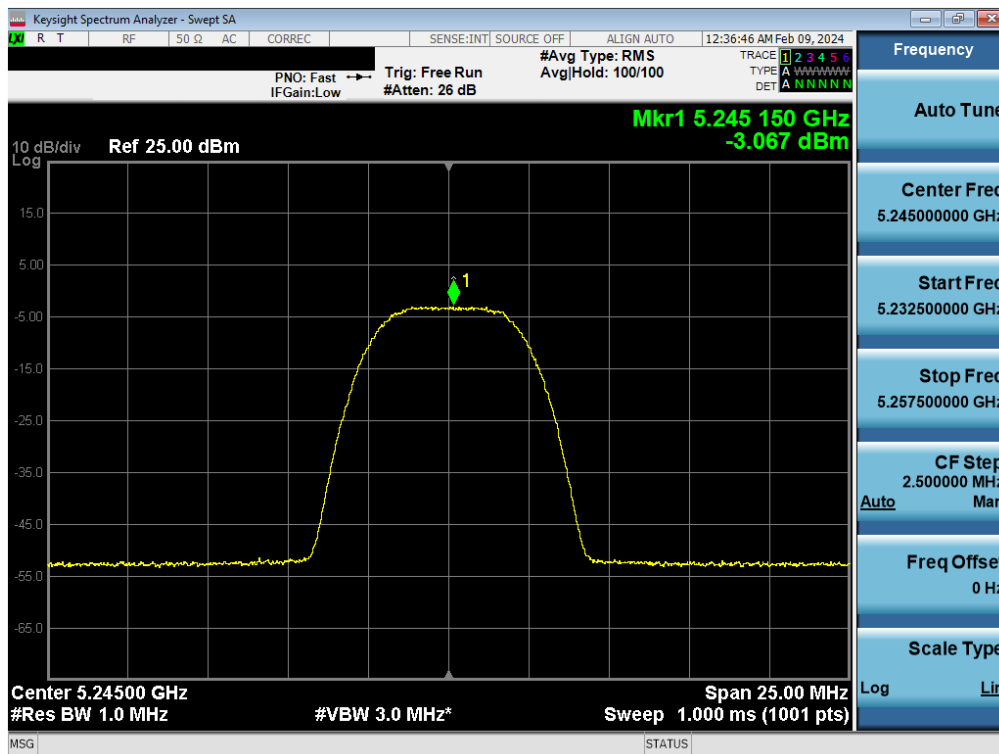


Plot 7-105. PSD Antenna WF7 (HNR8, iPA– 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 91 of 179


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
<b>Band 3</b>	5733	4.0	HDR4	ePA	3.83	30.00	-26.17
	5789	4.0	HDR4	ePA	4.35	30.00	-25.65
	5844	4.0	HDR4	ePA	3.87	30.00	-26.13
	5733	4.0	HDR4	iPA	-2.54	30.00	-32.54
	5789	4.0	HDR4	iPA	-2.55	30.00	-32.55
	5844	4.0	HDR4	iPA	-2.94	30.00	-32.94
	5733	8.0	HDR8	ePA	0.80	30.00	-29.20
	5789	8.0	HDR8	ePA	0.98	30.00	-29.02
	5844	8.0	HDR8	ePA	0.98	30.00	-29.02
	5733	8.0	HDR8	iPA	-6.24	30.00	-36.24
	5789	8.0	HDR8	iPA	-5.70	30.00	-35.70
	5844	8.0	HDR8	iPA	-6.00	30.00	-36.00

**Table 7-24. Power Spectral Density Measurements Antenna WF7**

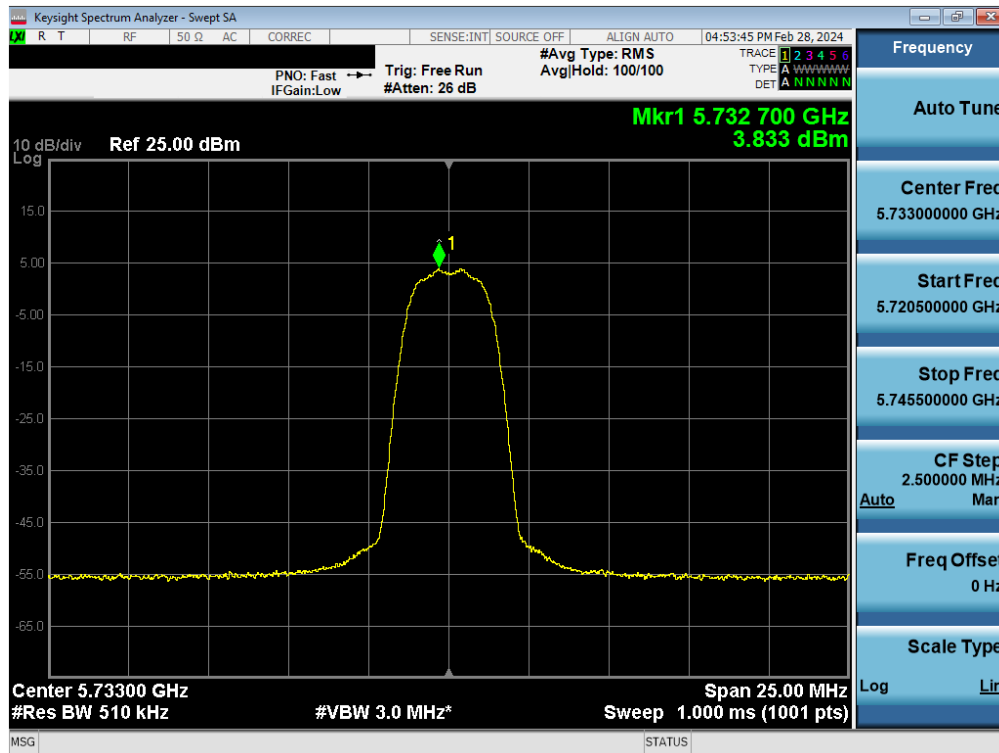


**Plot 7-106. PSD Antenna WF7 (HDR4, ePA 5733MHz)**

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 92 of 179

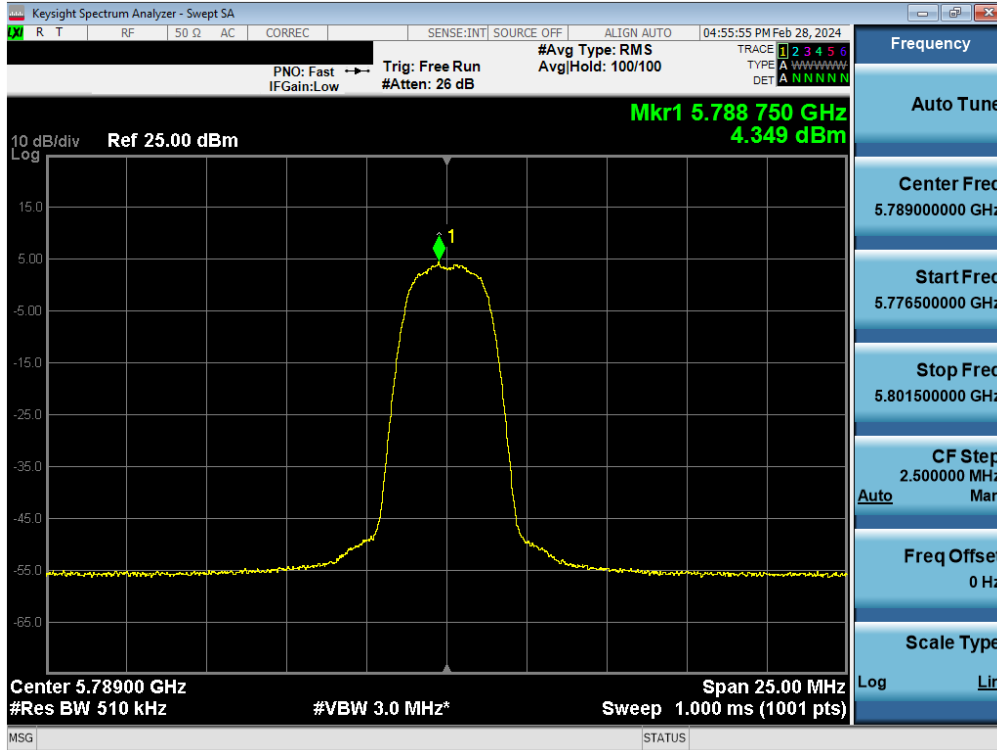


Plot 7-107. PSD Antenna WF7 (HDR4, ePA 5789MHz)

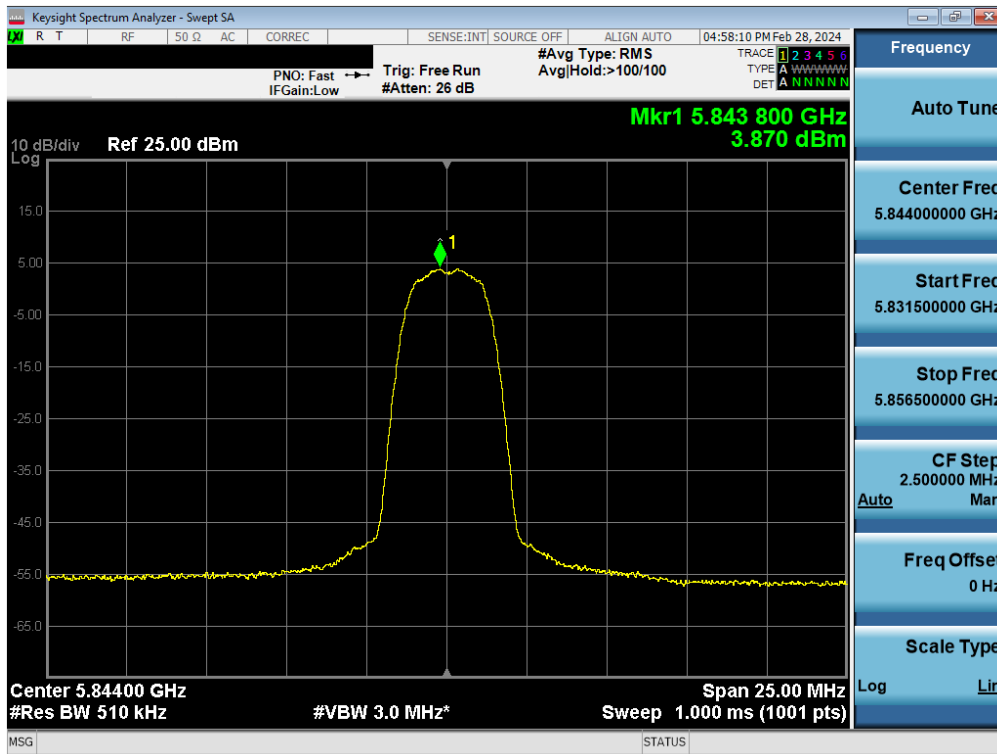


Plot 7-108. PSD Antenna WF7 (HDR4, ePA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 93 of 179

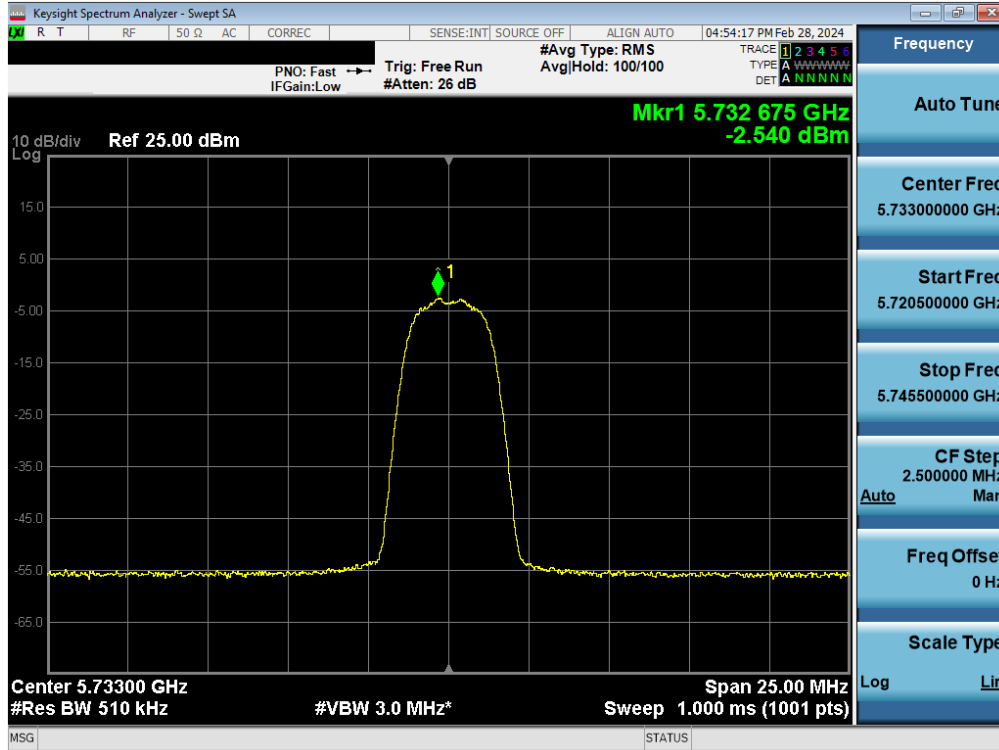


Plot 7-109. PSD Antenna WF7 (HDR4, iPA 5733MHz)

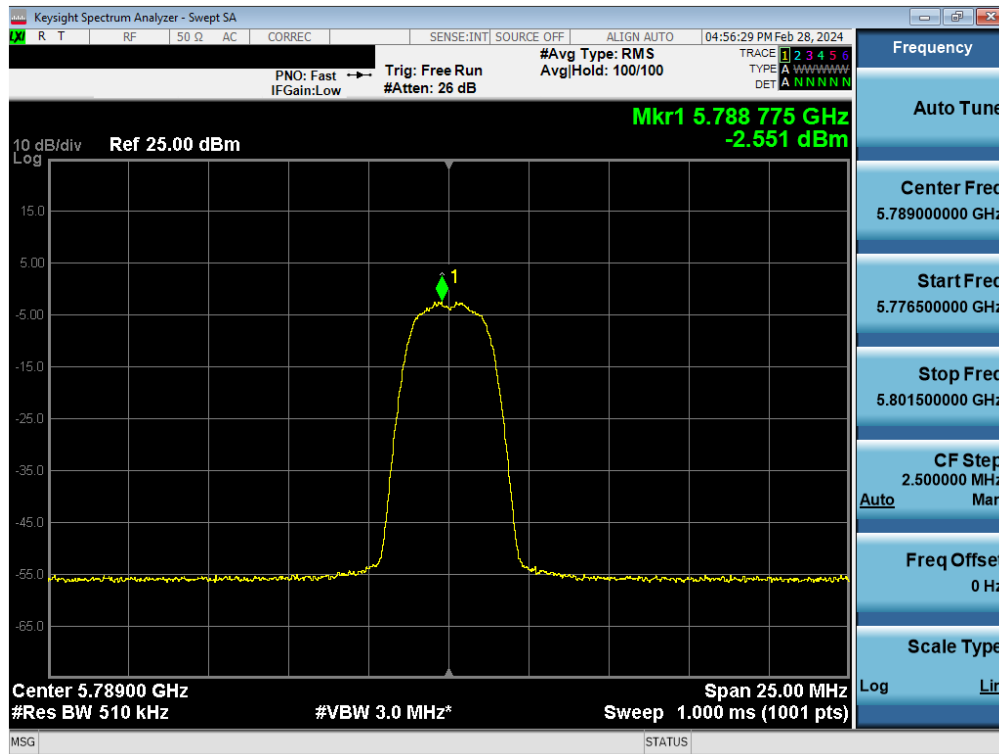


Plot 7-110. PSD Antenna WF7 (HDR4, iPA 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 94 of 179

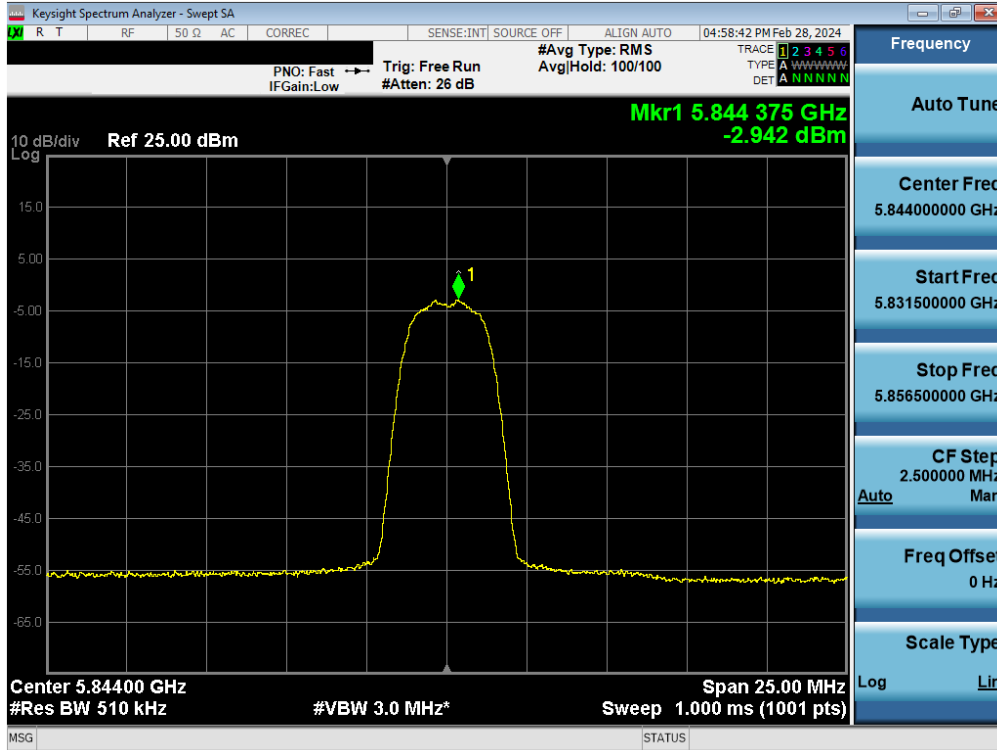


Plot 7-111. PSD Antenna WF7 (HDR4, iPA 5844MHz)

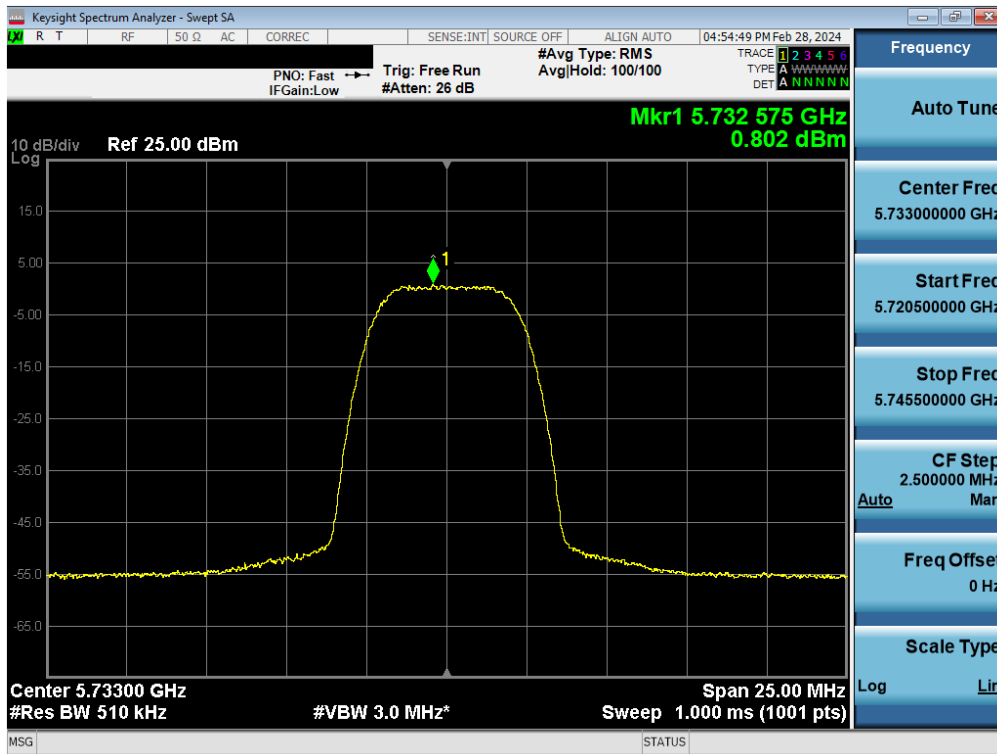


Plot 7-112. PSD Antenna WF7 (HDR8, ePA 5733MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 95 of 179

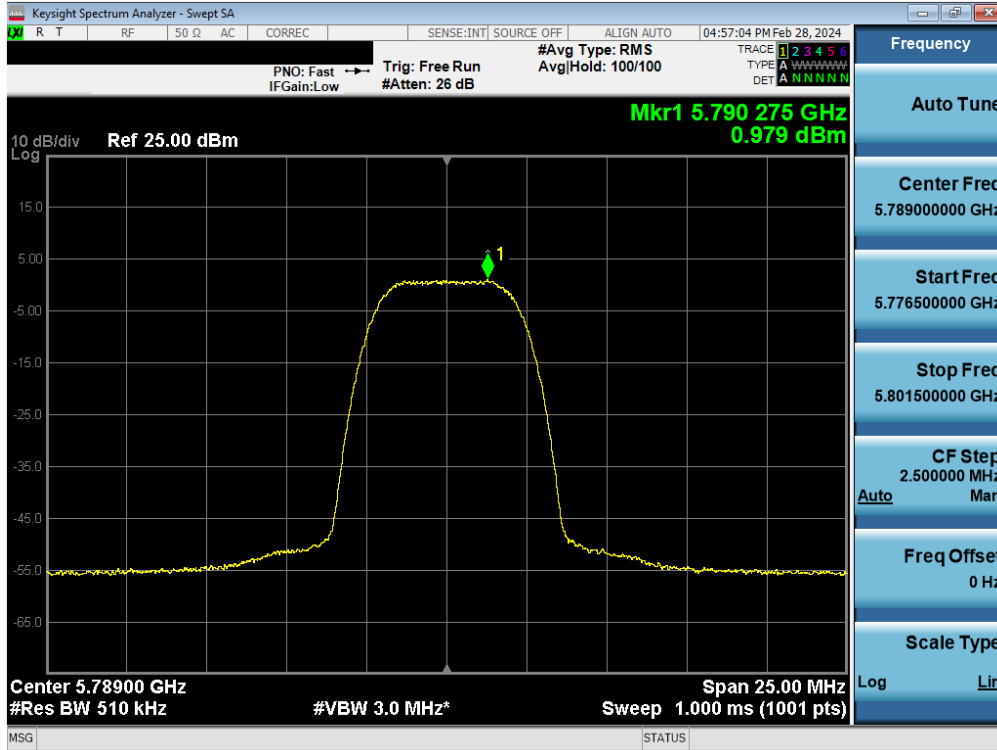


Plot 7-113. PSD Antenna WF7 (HDR8, ePA 5789MHz)

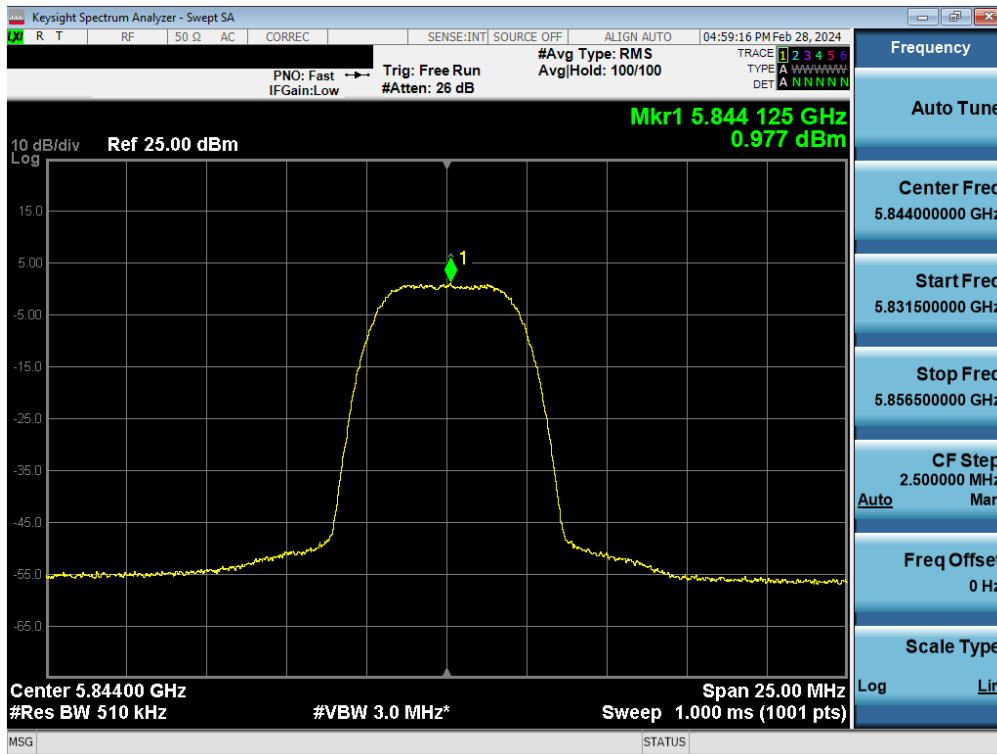


Plot 7-114. PSD Antenna WF7 (HDR8, ePA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 96 of 179



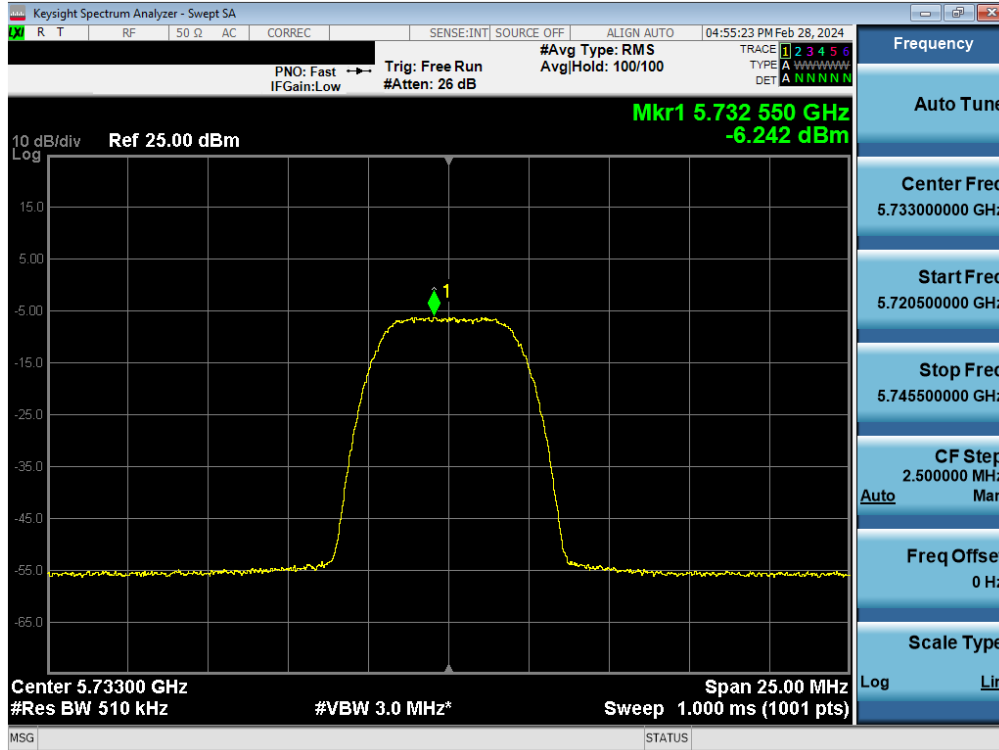


Plot 7-115. PSD Antenna WF7 (HDR8, iPA 5733MHz)

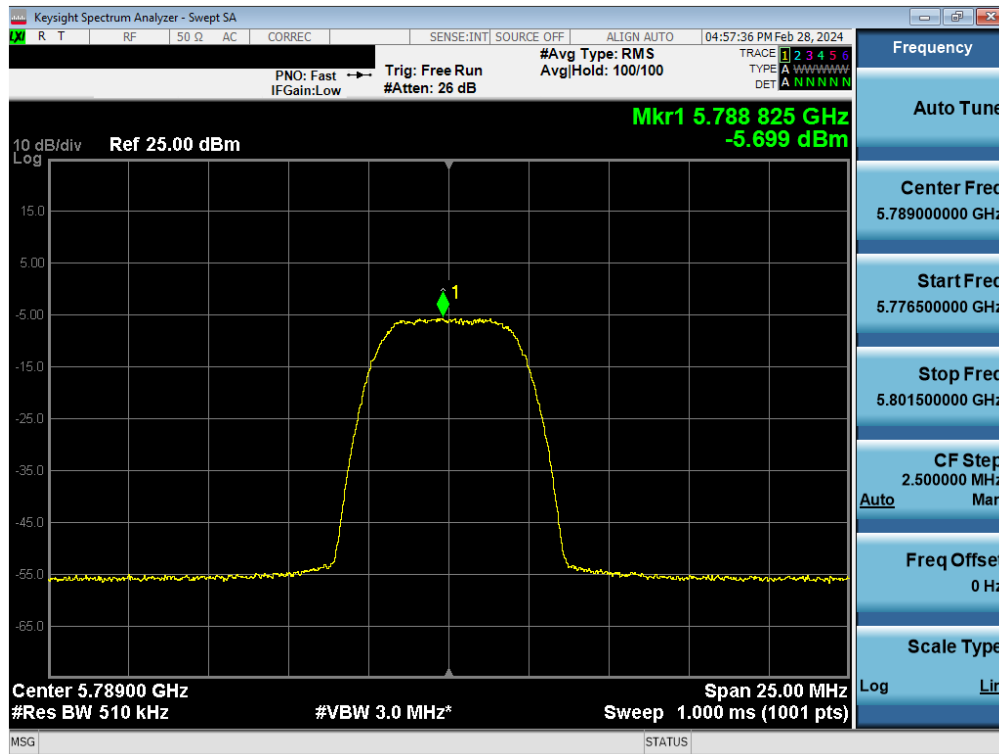

Plot 7-116. PSD Antenna WF7 (HDR8, iPA 5789MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 97 of 179

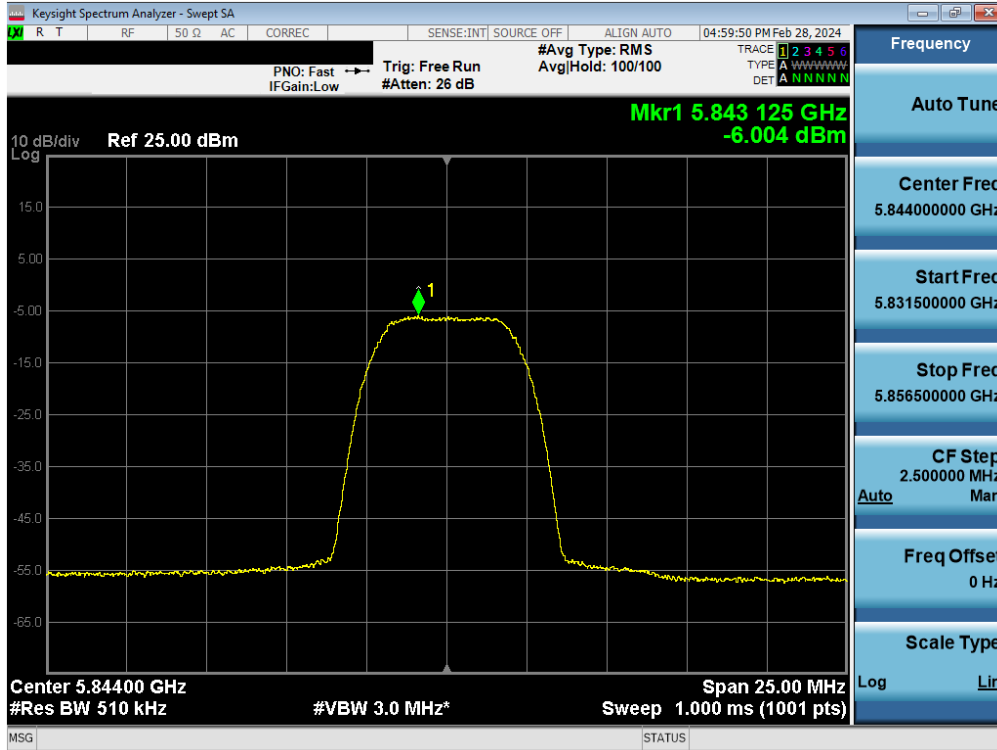

Plot 7-117. PSD Antenna WF7 (HDR8, iPA 5844MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 98 of 179

### 7.4.4 TxBF Power Spectral Density Measurements


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Antenna WF5B Power Density [dBm/MHz]	Antenna WF8 Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5162	4.0	HDR4	ePA	5.91	6.02	8.98	11.00	-2.02
	5204	4.0	HDR4	ePA	6.56	6.87	9.73	11.00	-1.27
	5245	4.0	HDR4	ePA	6.39	6.22	9.32	11.00	-1.68
	5162	4.0	HDR4	iPA	-0.41	-0.47	2.58	11.00	-8.42
	5204	4.0	HDR4	iPA	-0.48	-0.42	2.56	11.00	-8.44
	5245	4.0	HDR4	iPA	-0.12	-0.13	2.89	11.00	-8.11
	5162	8.0	HDR8	ePA	6.25	4.29	8.39	11.00	-2.61
	5204	8.0	HDR8	ePA	5.84	4.65	8.29	11.00	-2.71
	5245	8.0	HDR8	ePA	6.17	4.93	8.61	11.00	-2.39
	5162	8.0	HDR8	iPA	-3.09	-2.75	0.09	11.00	-10.91
	5204	8.0	HDR8	iPA	-2.70	-3.23	0.06	11.00	-10.94
5245	8.0	HDR8	iPA	-2.90	-2.81	0.16	11.00	-10.84	

Table 7-25. FCC Power Spectral Density Measurements TxBF


	Frequency [MHz]	Data Rate [Mbps]	Mode	Power Scheme	Antenna WF5B Power Density [dBm/MHz]	Antenna WF8 Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directional Antenna Gain [dBi]	e.i.r.p Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5162	4.0	HDR4	ePA	-0.13	-0.91	2.51	4.92	7.43	10.00	-2.57
	5204	4.0	HDR4	ePA	0.39	-0.46	2.99	4.92	7.91	10.00	-2.09
	5245	4.0	HDR4	ePA	0.49	-0.12	3.20	4.92	8.12	10.00	-1.88
	5162	4.0	HDR4	iPA	-0.41	-0.47	2.58	4.92	7.49	10.00	-2.51
	5204	4.0	HDR4	iPA	-0.48	-0.42	2.56	4.92	7.48	10.00	-2.52
	5245	4.0	HDR4	iPA	-0.12	-0.13	2.89	4.92	7.81	10.00	-2.19
	5162	8.0	HDR8	ePA	0.39	-0.27	3.08	4.92	8.00	10.00	-2.00
	5204	8.0	HDR8	ePA	0.24	0.00	3.13	4.92	8.05	10.00	-1.95
	5245	8.0	HDR8	ePA	0.40	0.41	3.41	4.92	8.33	10.00	-1.67
	5162	8.0	HDR8	iPA	-3.09	-2.75	0.09	4.92	5.01	10.00	-4.99
	5204	8.0	HDR8	iPA	-2.70	-3.23	0.06	4.92	4.98	10.00	-5.02
	5245	8.0	HDR8	iPA	-2.90	-2.81	0.16	4.92	5.08	10.00	-4.92

Table 7-26. ISED Power Spectral Density Measurements TxBF

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 99 of 179

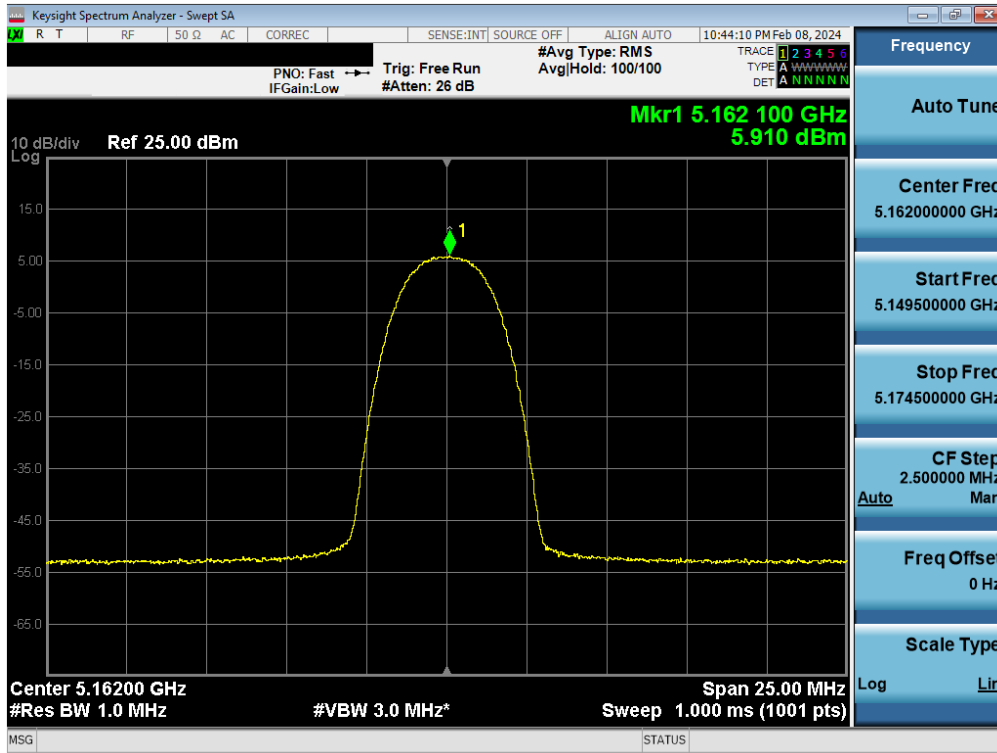


Plot 7-118. FCC PSD TxBF Antenna WF5B (HDR4, ePA – 5162MHz)

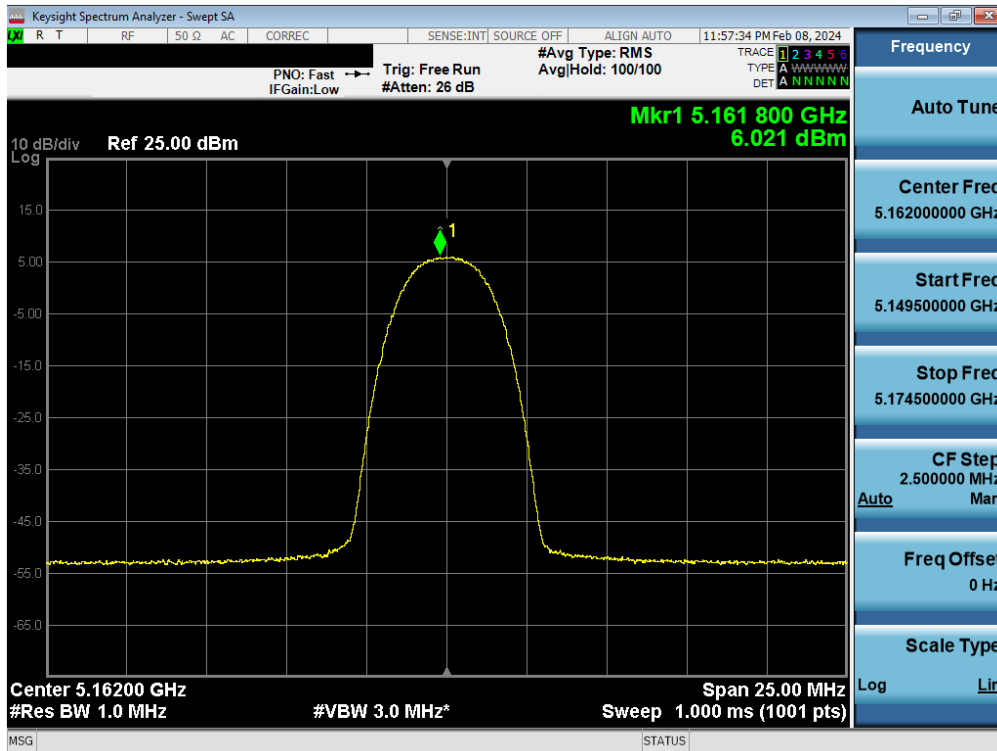


Plot 7-119. FCC PSD TxBF Antenna WF8 (HDR4, ePA – 5162MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 100 of 179

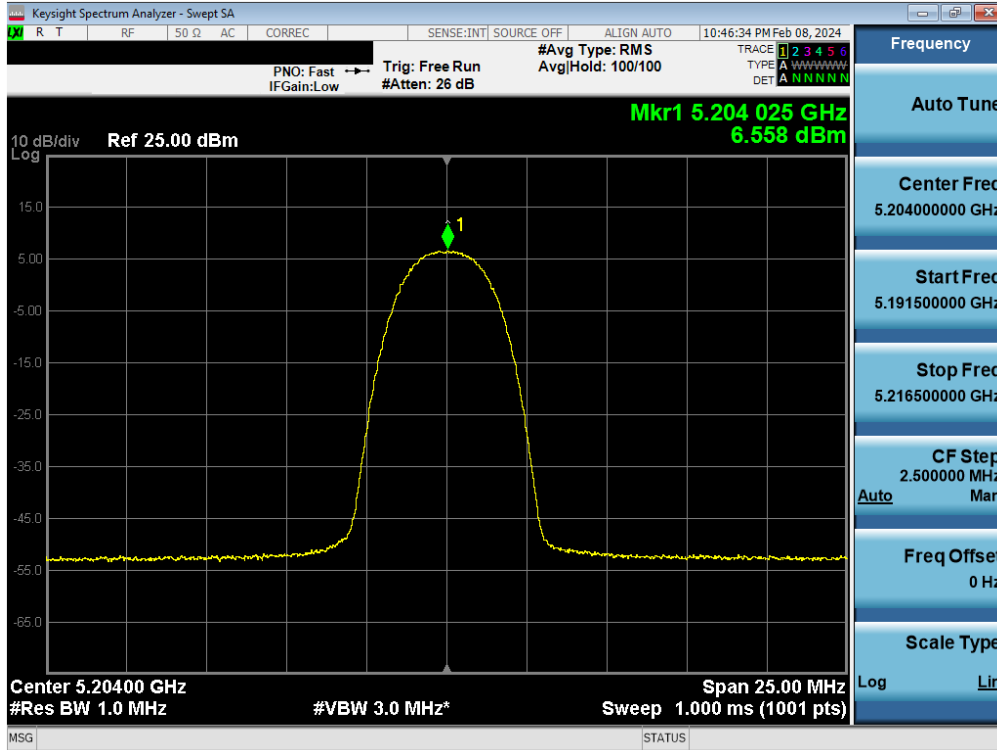


Plot 7-120. FCC PSD Tx BF Antenna WF5B (HDR4, ePA – 5204MHz)

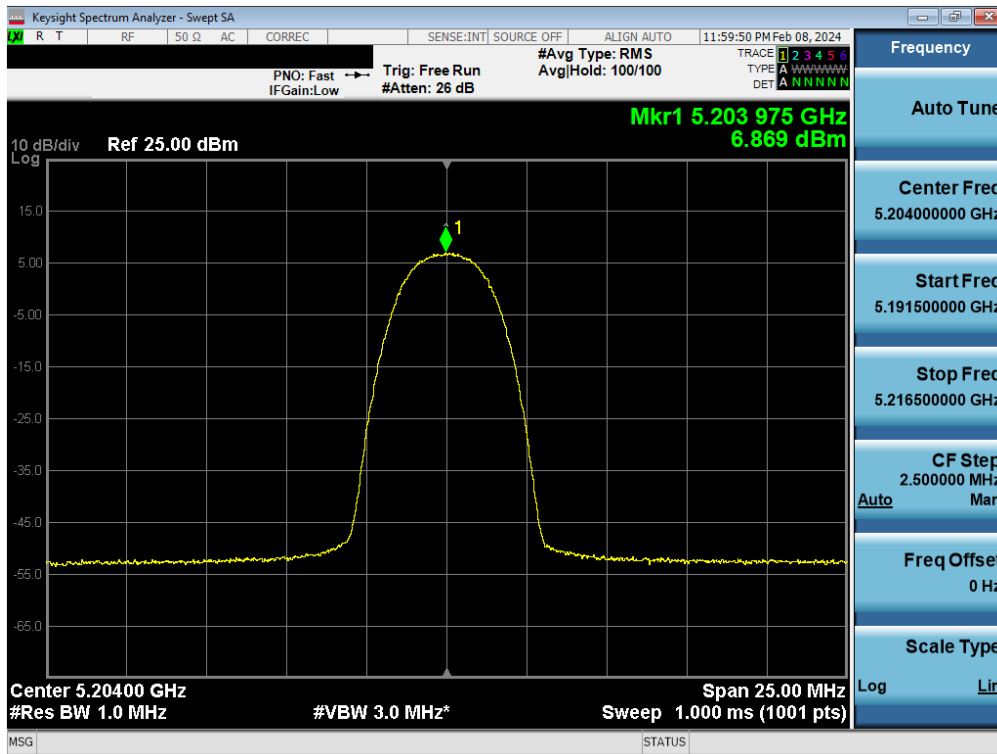


Plot 7-121. FCC PSD Tx BF Antenna WF8 (HDR4, ePA – 5204MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 101 of 179


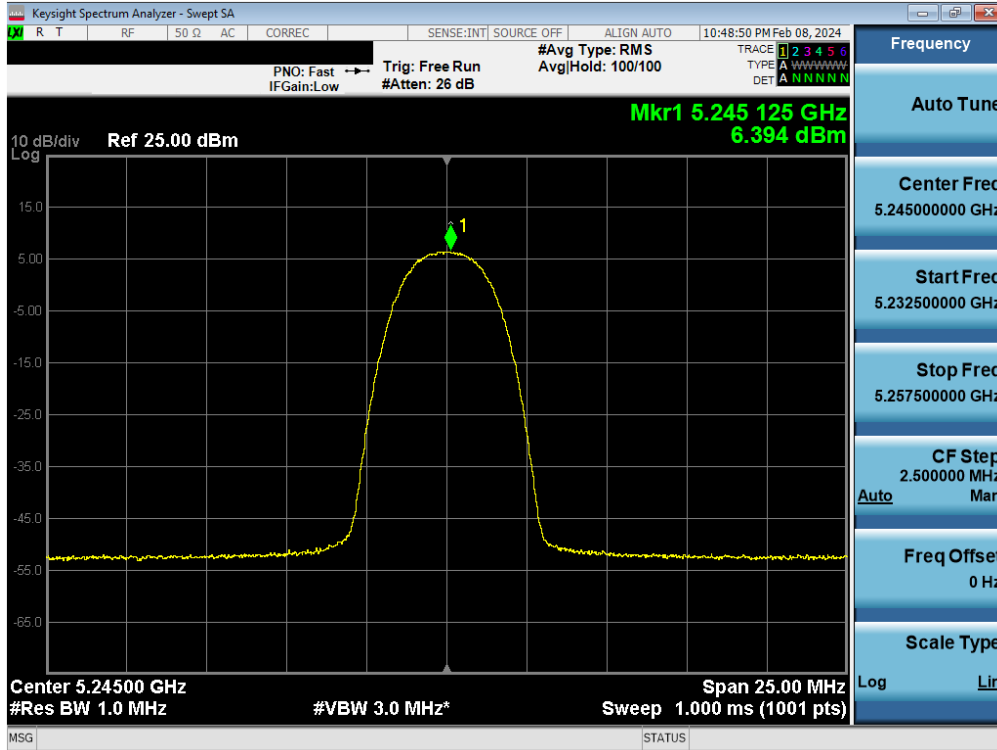


Plot 7-122. FCC PSD TxBF Antenna WF5B (HDR4, ePA- 5245MHz)

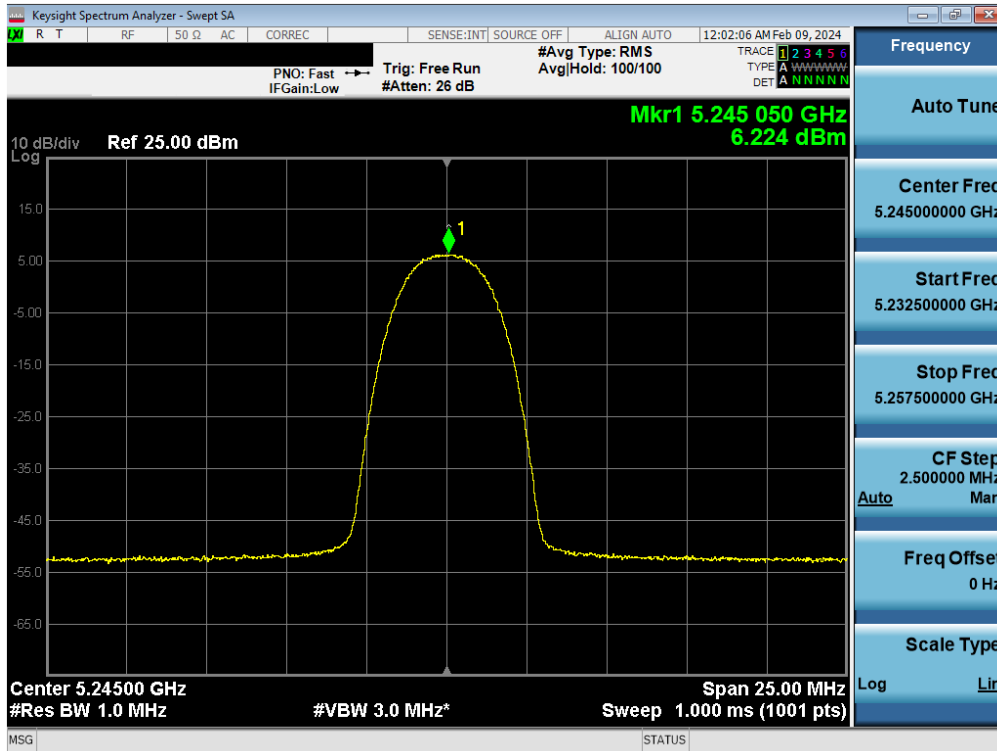

Plot 7-123. FCC PSD TxBF Antenna WF8 (HDR4, ePA- 5245MHz)

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 102 of 179

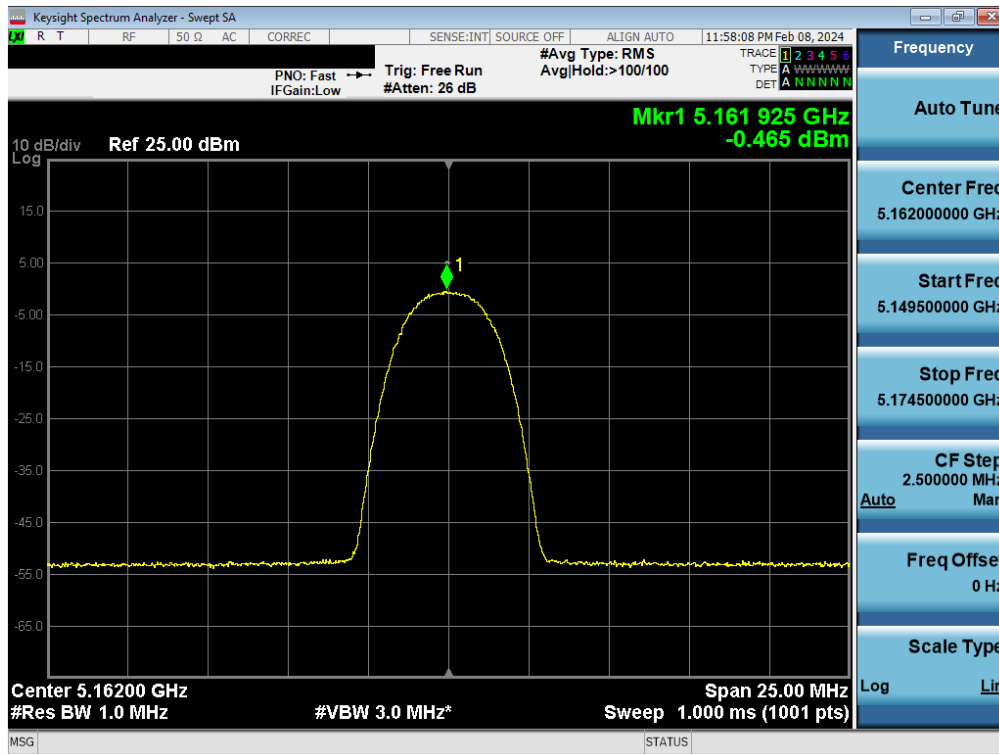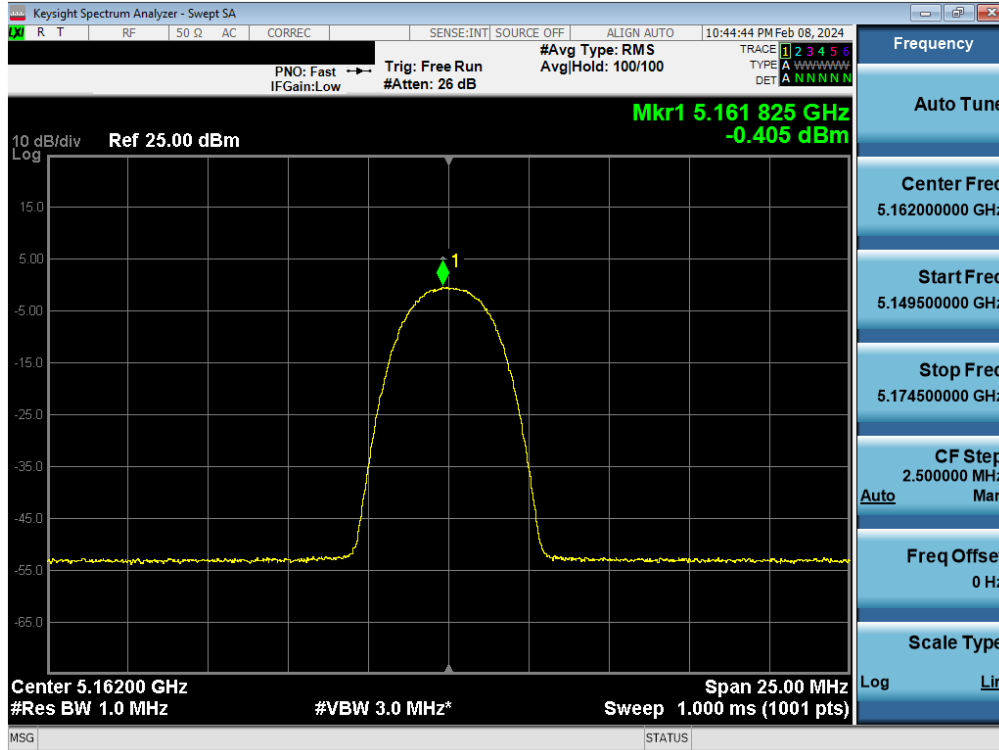

FCC ID: BCGA2925 IC: 579C-A2925		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270069-09.BCG	Test Dates: 11/29/23-3/22/2024	EUT Type: Tablet Device	Page 103 of 179