


Plot 7-1214. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 45)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| * 12350.00 | Average | V | - | - | -84.97 | 20.67 | 42.69 | 53.98 | -11.29 |
| * 12350.00 | Peak | V | - | - | -73.30 | 20.69 | 54.38 | 73.98 | -19.60 |

Table 7-190. Radiated Spurious Emission Measurements Antenna 2a

| | | | | |
|--|--|---|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 380 of 511 |

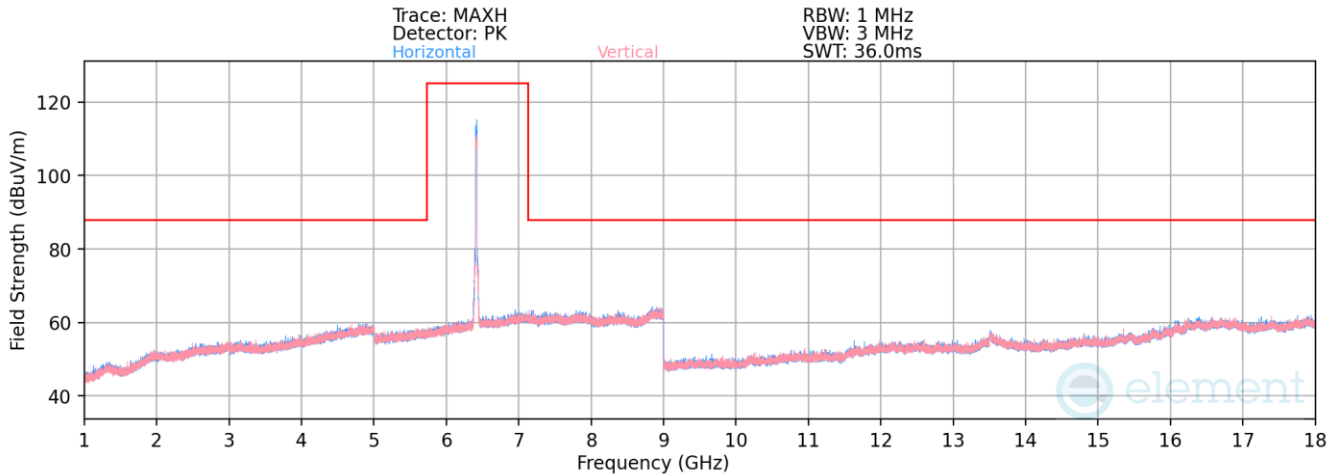


Plot 7-1215. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 93)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12830.00 | Average | V | - | - | -85.73 | 21.68 | 42.95 | 68.23 | -25.28 |
| 12830.00 | Peak | V | - | - | -73.36 | 21.68 | 55.32 | 88.23 | -32.91 |

Table 7-191. Radiated Spurious Emission Measurements Antenna 2a

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 381 of 511 |

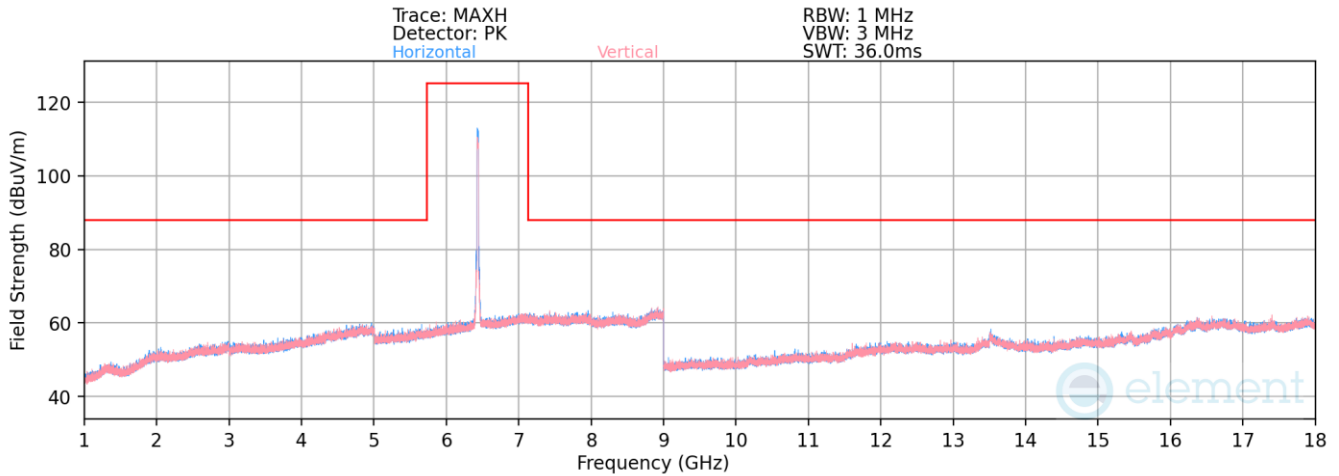


Plot 7-1216. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 97)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12870.00 | Average | V | - | - | -85.78 | 21.36 | 42.58 | 68.23 | -25.65 |
| 12870.00 | Peak | V | - | - | -73.56 | 21.49 | 54.93 | 88.23 | -33.30 |

Table 7-192. Radiated Spurious Emission Measurements Antenna 2a

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 382 of 511 |

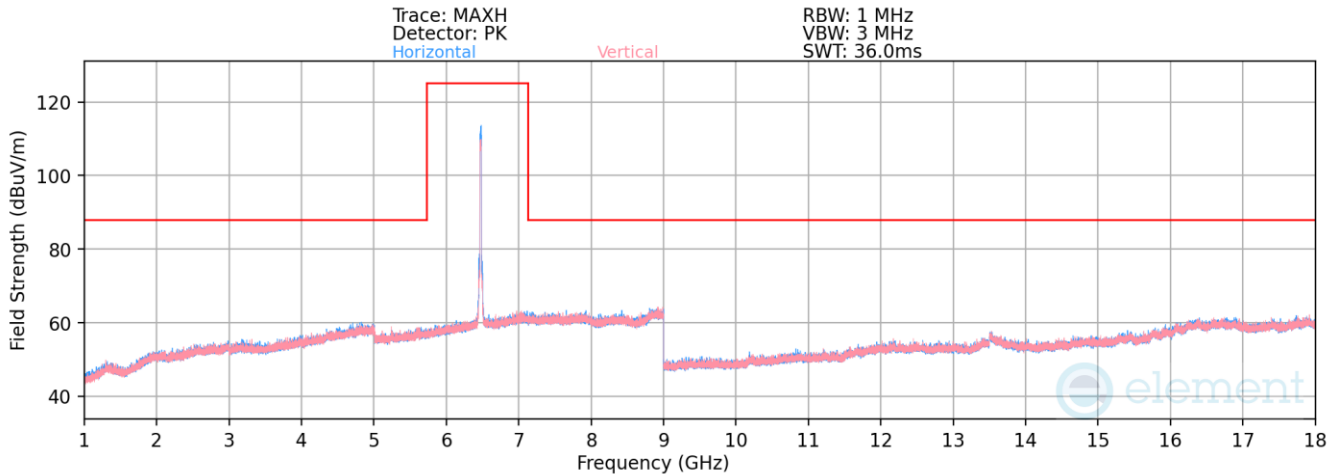


Plot 7-1217. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 105)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12950.00 | Average | V | - | - | -85.64 | 21.47 | 42.83 | 68.23 | -25.40 |
| 12950.00 | Peak | V | - | - | -74.07 | 21.47 | 54.40 | 88.23 | -33.83 |

Table 7-193. Radiated Spurious Emission Measurements Antenna 2a

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 383 of 511 |

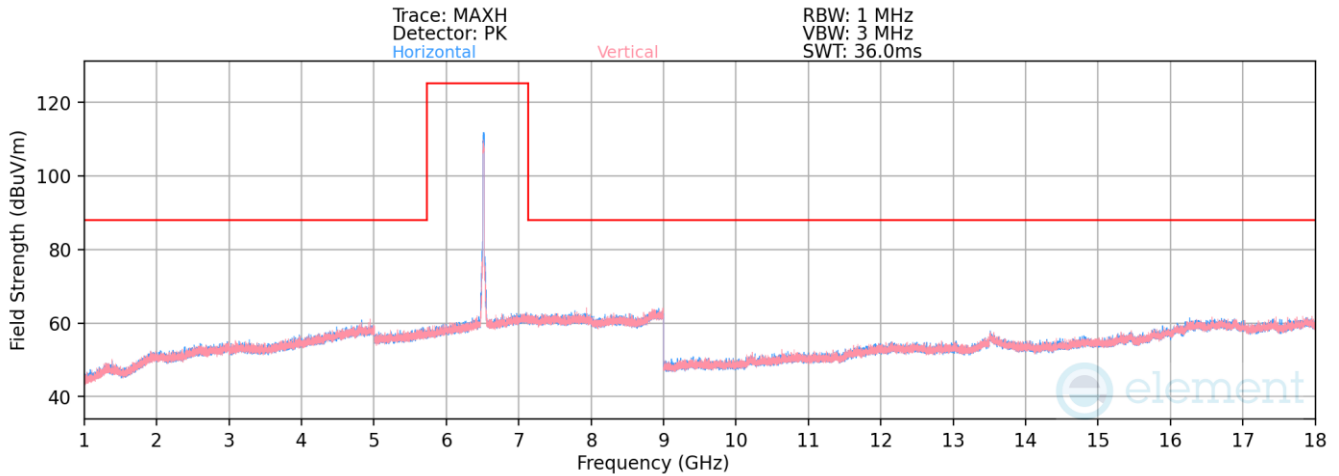


Plot 7-1218. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 113)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13030.00 | Average | H | - | - | -85.28 | 21.84 | 43.56 | 68.23 | -24.67 |
| 13030.00 | Peak | H | - | - | -73.64 | 21.92 | 55.29 | 88.23 | -32.94 |

Table 7-194. Radiated Spurious Emission Measurements Antenna 2a

| | | | | |
|--|---|---|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 384 of 511 |

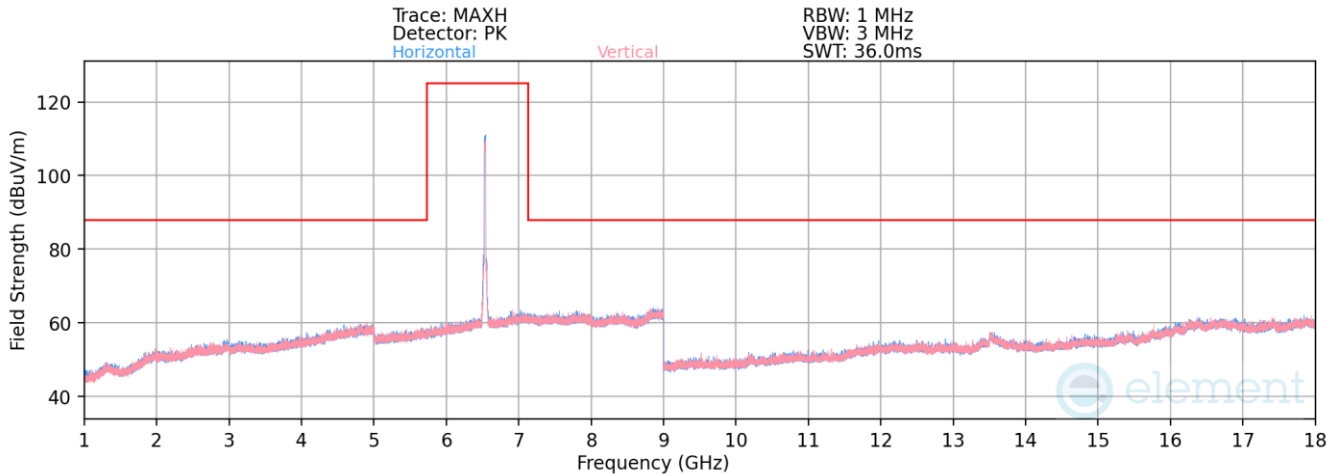


Plot 7-1219. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 117)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13070.00 | Average | V | - | - | -85.33 | 21.48 | 43.15 | 68.23 | -25.08 |
| 13070.00 | Peak | V | - | - | -73.74 | 21.48 | 54.74 | 88.23 | -33.49 |

Table 7-195. Radiated Spurious Emission Measurements Antenna 2a

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 385 of 511 |

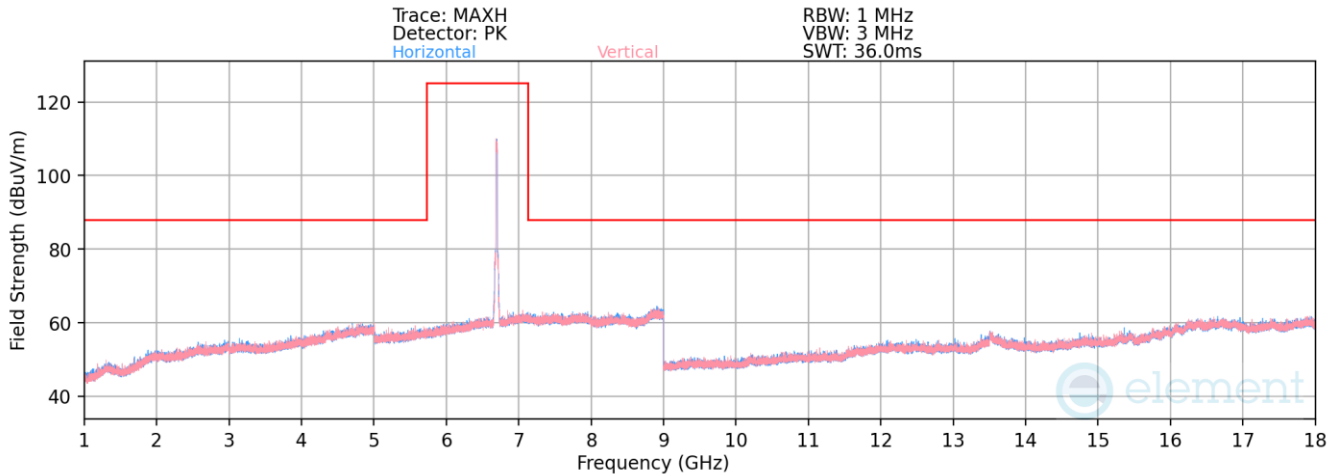


Plot 7-1220. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 149)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| * 13390.00 | Average | V | - | - | -85.25 | 21.88 | 43.64 | 53.98 | -10.34 |
| * 13390.00 | Peak | V | - | - | -73.06 | 21.88 | 55.82 | 73.98 | -18.16 |

Table 7-196. Radiated Spurious Emission Measurements Antenna 2a

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 386 of 511 |

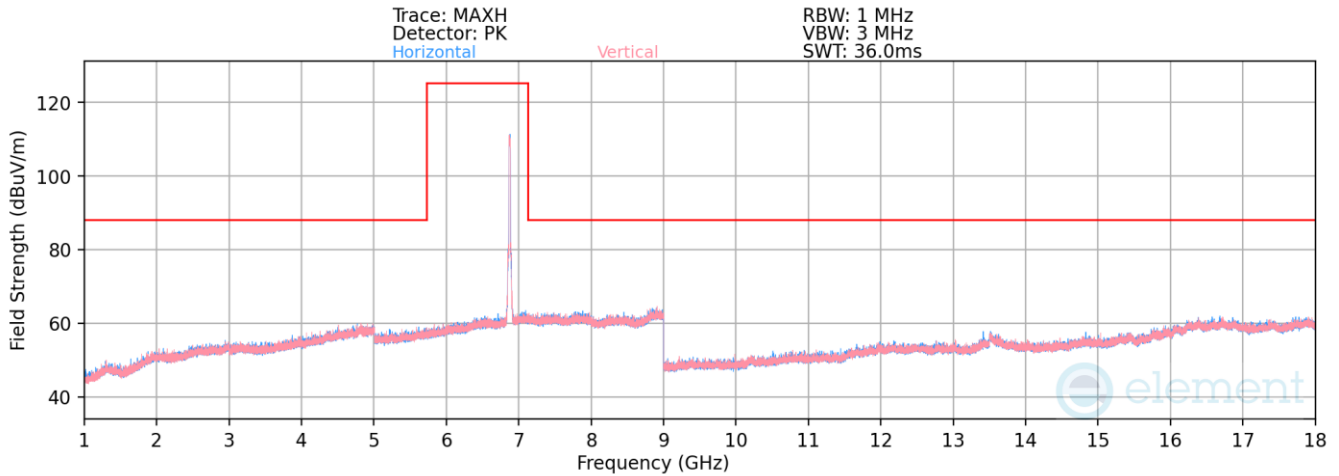


Plot 7-1221. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 185)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13750.00 | Average | H | - | - | -84.56 | 21.34 | 43.78 | 68.23 | -24.45 |
| 13750.00 | Peak | H | - | - | -73.26 | 21.34 | 55.08 | 88.23 | -33.15 |

Table 7-197. Radiated Spurious Emission Measurements Antenna 2a

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 387 of 511 |

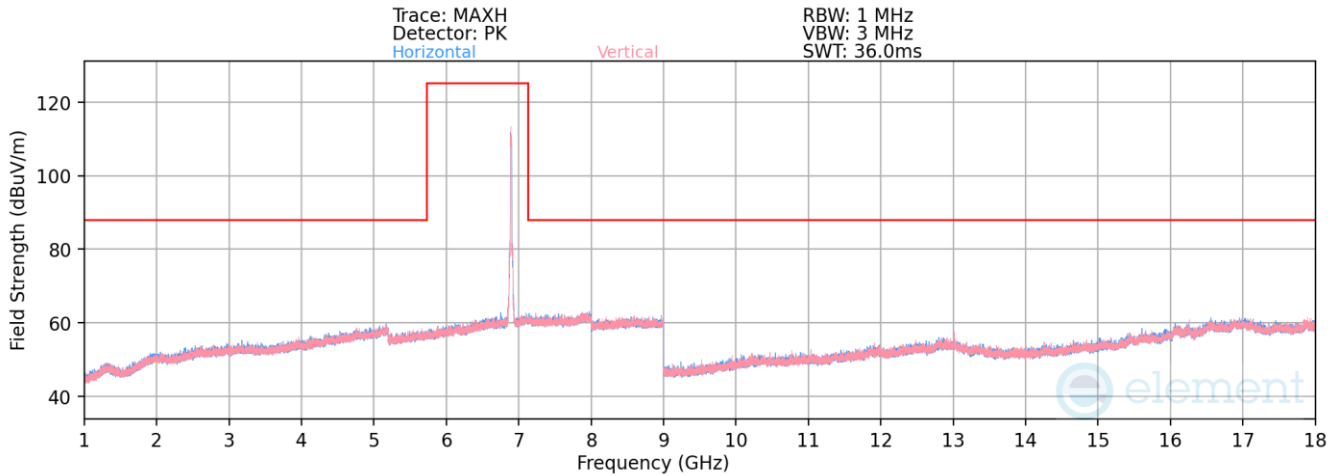


Plot 7-1222. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 189)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13790.00 | Average | V | - | - | -86.21 | 21.78 | 42.57 | 68.23 | -25.66 |
| 13790.00 | Peak | V | - | - | -73.68 | 21.49 | 54.82 | 88.23 | -33.41 |

Table 7-198. Radiated Spurious Emission Measurements Antenna 2a

| | | | | |
|--|--|---|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 388 of 511 |

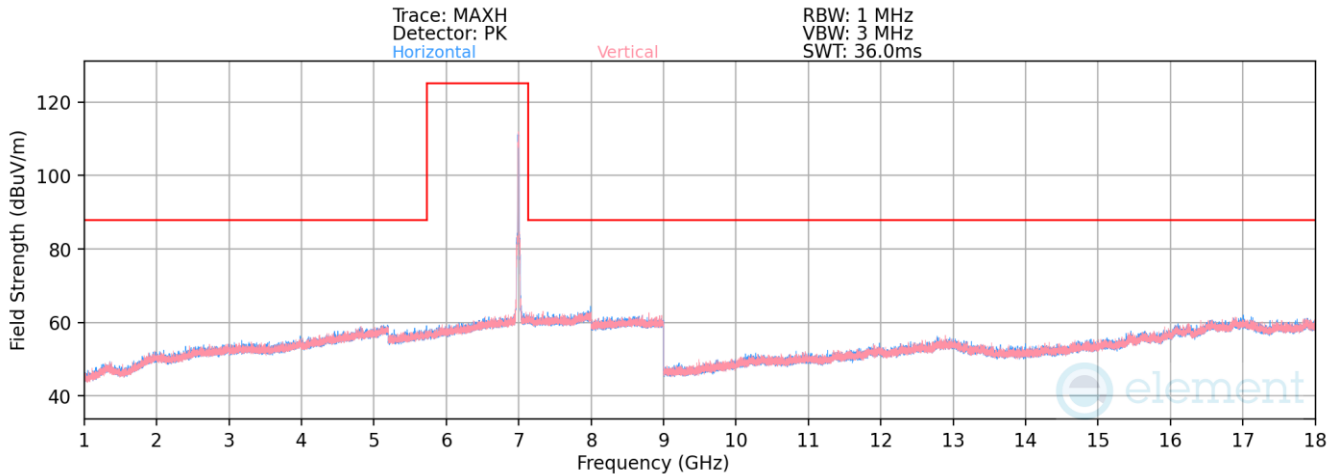


Plot 7-1223. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 209)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13990.00 | Average | V | - | - | -86.66 | 21.84 | 42.17 | 68.23 | -26.06 |
| 13990.00 | Peak | V | - | - | -74.77 | 21.81 | 54.04 | 88.23 | -34.19 |

Table 7-199. Radiated Spurious Emission Measurements Antenna 2a

| | | | | |
|--|---|---|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 389 of 511 |

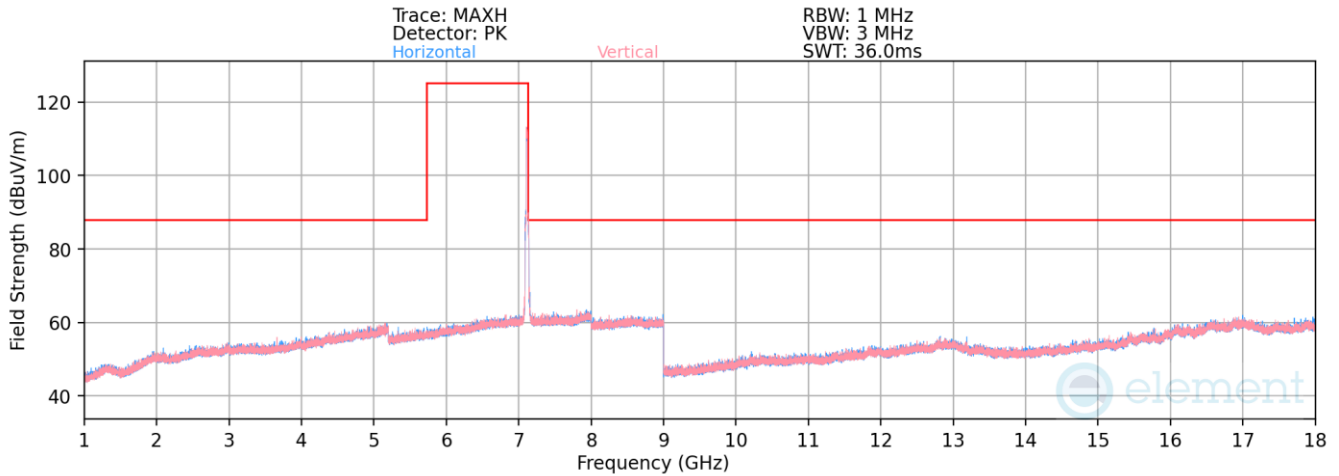

Plot 7-1224. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 233)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 14230.00 | Average | V | - | - | -86.25 | 22.31 | 43.06 | 68.23 | -25.17 |
| 14230.00 | Peak | V | - | - | -75.15 | 22.44 | 54.29 | 88.23 | -33.94 |

Table 7-200. Radiated Spurious Emission Measurements Antenna 2a

| | | | | |
|--|--|---|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 390 of 511 |

7.7.4 SDM Primary Radiated Spurious Emission

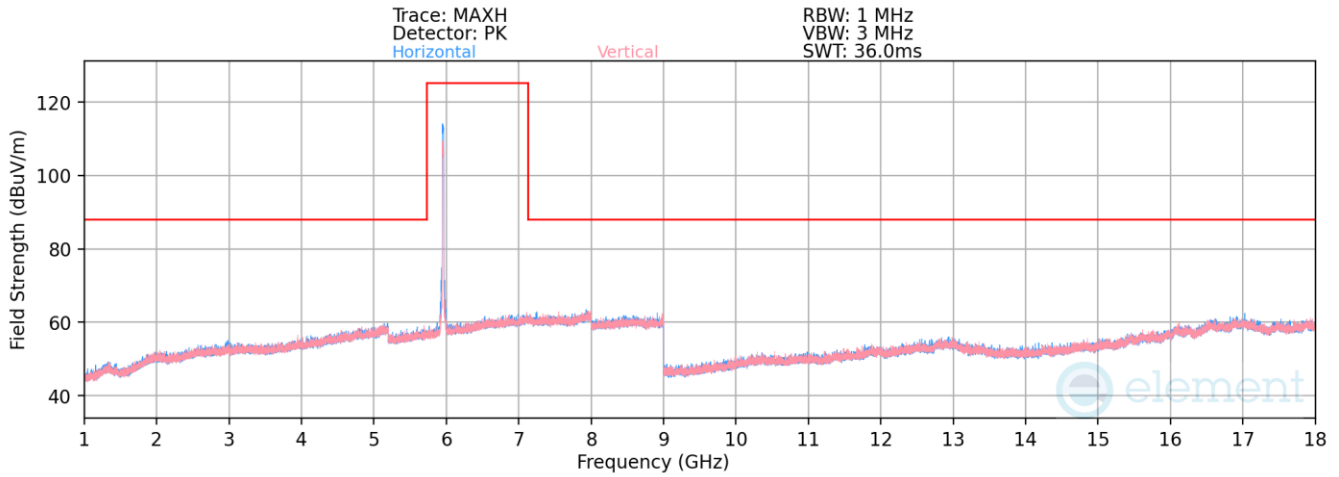


Plot 7-1225. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 1)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11910.00 | Average | V | - | - | -85.61 | 20.02 | 41.41 | 53.98 | -12.57 |
| * 11910.00 | Peak | V | - | - | -74.36 | 20.05 | 52.69 | 73.98 | -21.29 |
| * 17865.00 | Average | H | - | - | -86.33 | 28.61 | 46.08 | 53.98 | -7.90 |
| * 17865.00 | Peak | H | - | - | -74.39 | 28.49 | 57.32 | 73.98 | -16.66 |

Table 7-201. Radiated Spurious Emission Measurements SDM Primary

| | | | | |
|--|--|---|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 391 of 511 |

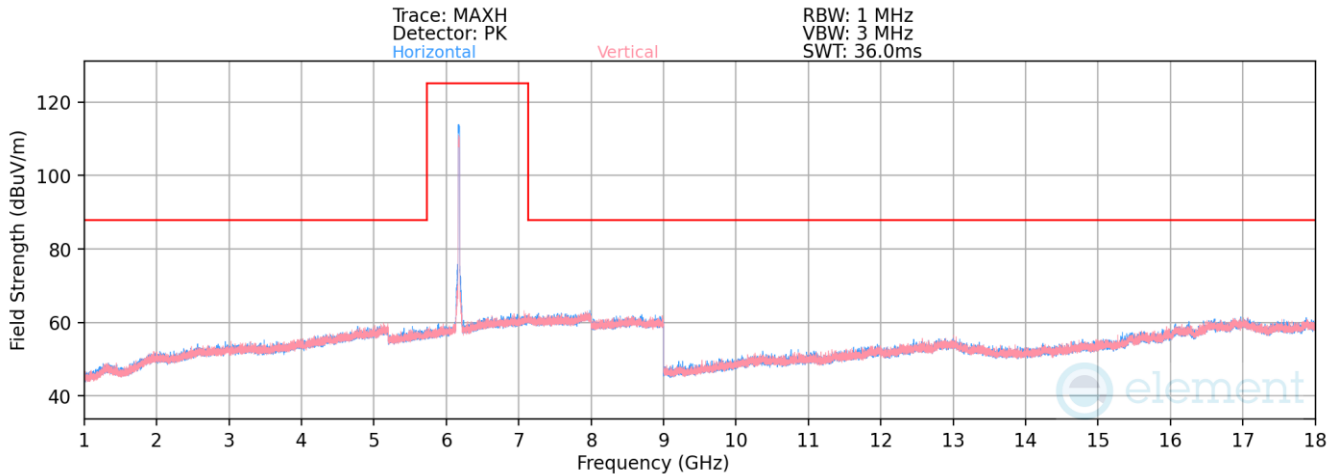


Plot 7-1226. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 45)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 12350.00 | Average | V | - | - | -85.88 | 20.69 | 41.80 | 53.98 | -12.18 |
| * 12350.00 | Peak | V | - | - | -74.26 | 20.69 | 53.43 | 73.98 | -20.55 |

Table 7-202. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 392 of 511 |

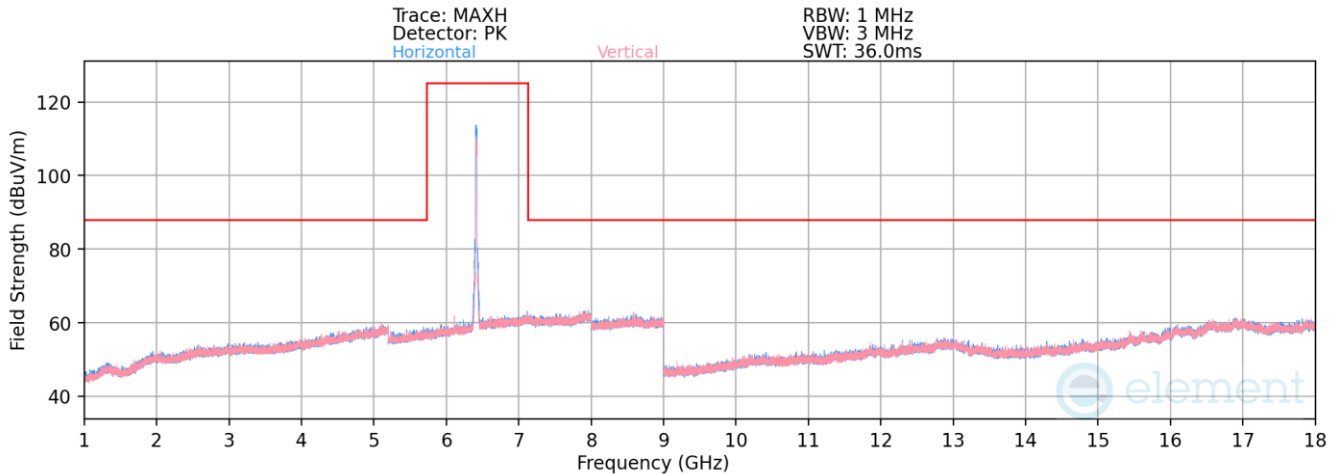


Plot 7-1227. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 93)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 12830.00 | Average | V | - | - | -86.15 | 22.01 | 42.87 | 68.23 | -25.36 |
| 12830.00 | Peak | V | - | - | -74.41 | 22.01 | 54.60 | 88.23 | -33.63 |

Table 7-203. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 393 of 511 |

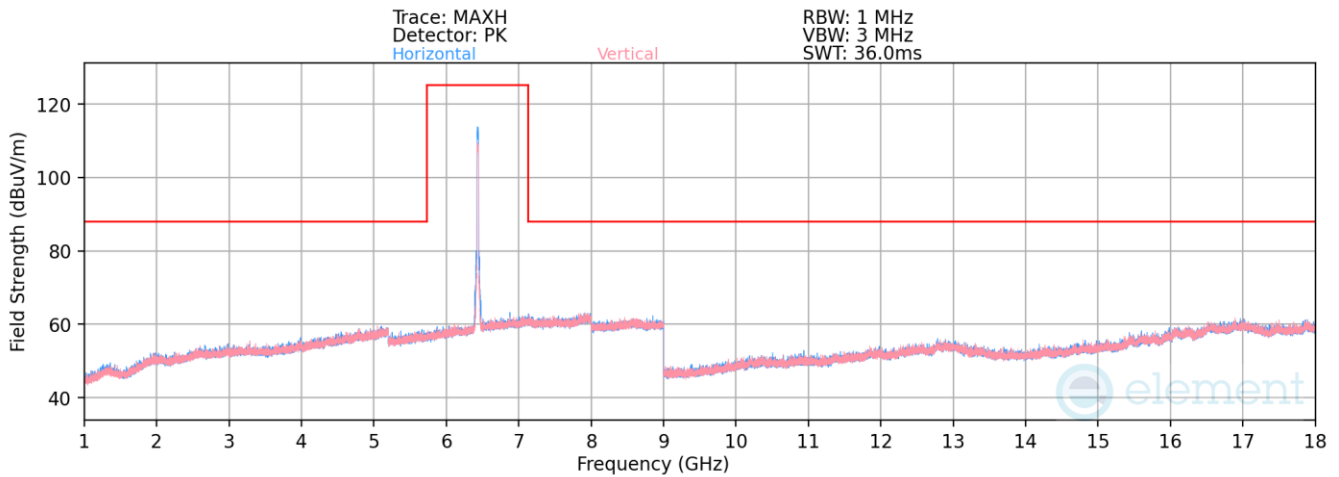


Plot 7-1228. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 97)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12870.00 | Average | V | - | - | -85.69 | 21.75 | 43.06 | 68.23 | -25.17 |
| 12870.00 | Peak | V | - | - | -74.62 | 21.75 | 54.12 | 88.23 | -34.11 |

Table 7-204. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 394 of 511 |

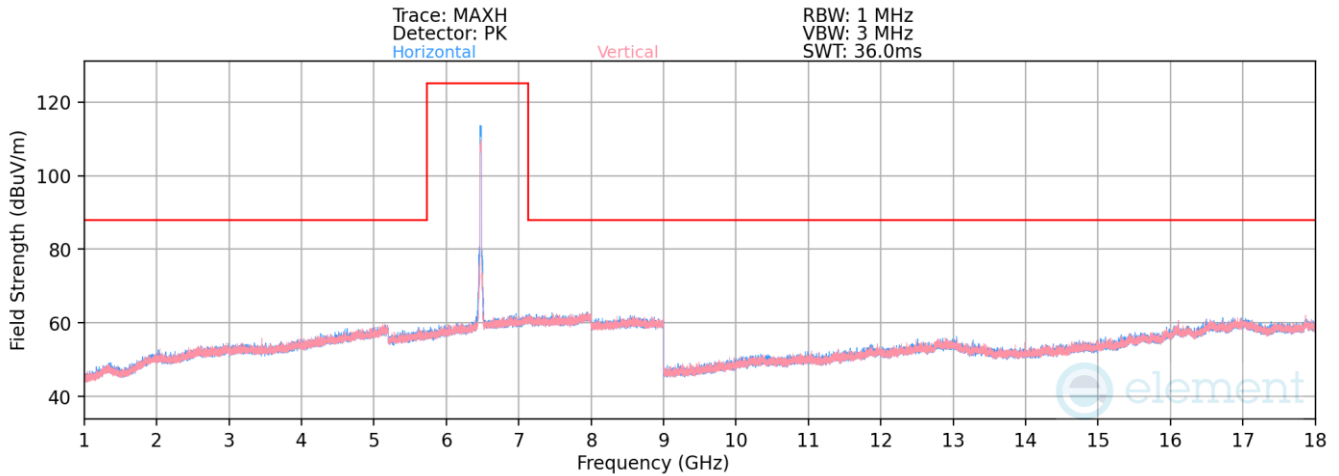


Plot 7-1229. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 105)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 12950.00 | Average | V | - | - | -85.66 | 21.68 | 43.02 | 68.23 | -25.21 |
| 12950.00 | Peak | V | - | - | -74.24 | 21.68 | 54.44 | 88.23 | -33.79 |

Table 7-205. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 395 of 511 |

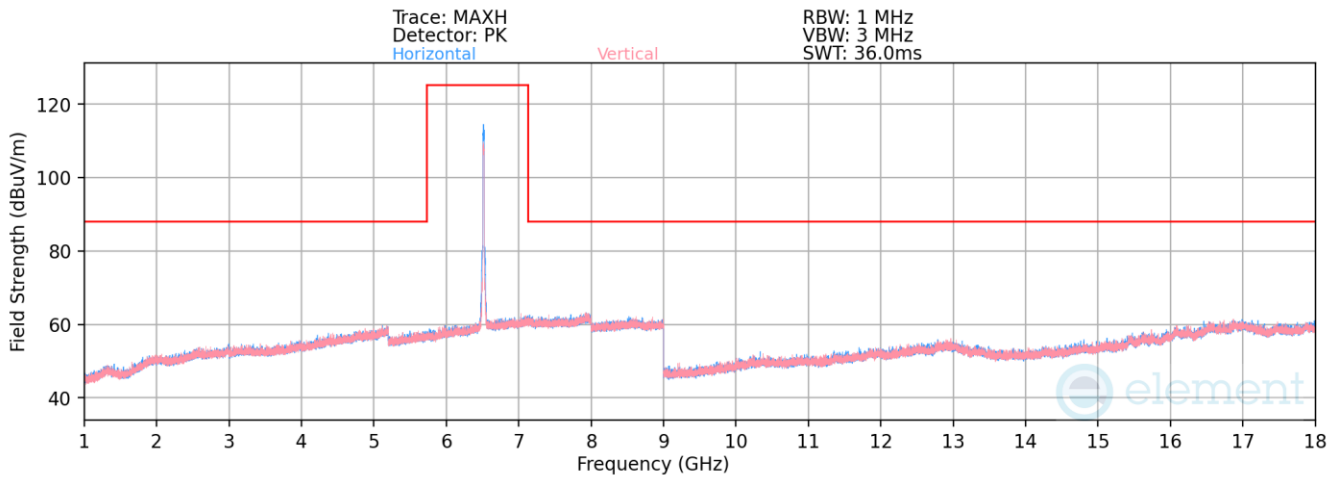


Plot 7-1230. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 113)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 13030.00 | Average | V | - | - | -85.70 | 21.92 | 43.22 | 68.23 | -25.01 |
| 13030.00 | Peak | V | - | - | -74.36 | 21.89 | 54.54 | 88.23 | -33.69 |

Table 7-206. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|--|---|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 396 of 511 |

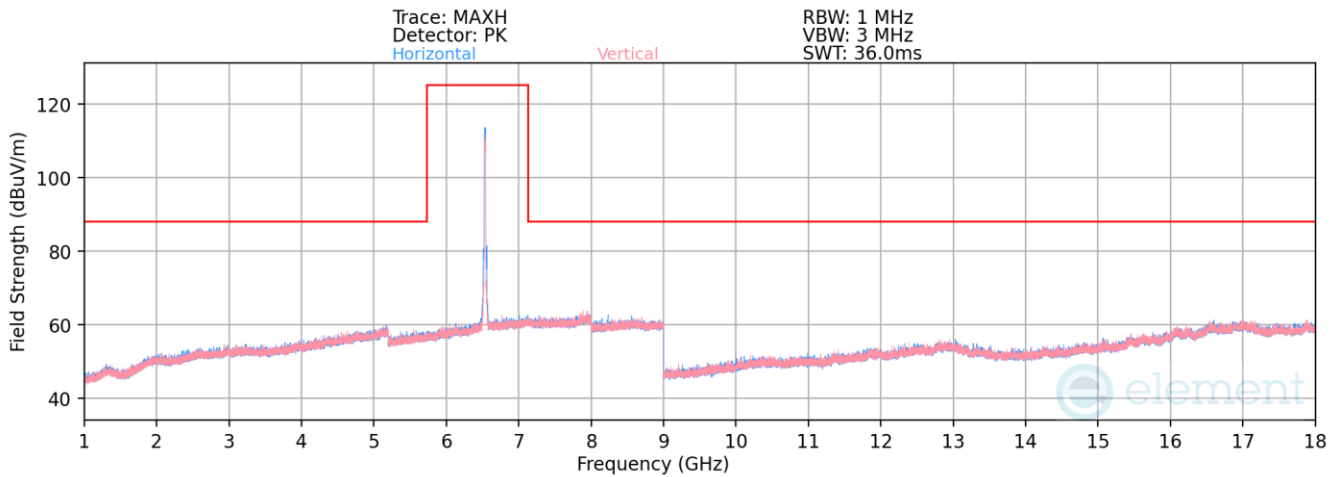


Plot 7-1231. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 117)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13070.00 | Average | V | - | - | -85.71 | 21.60 | 42.89 | 68.23 | -25.34 |
| 13070.00 | Peak | V | - | - | -73.62 | 21.60 | 54.99 | 88.23 | -33.24 |

Table 7-207. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 397 of 511 |

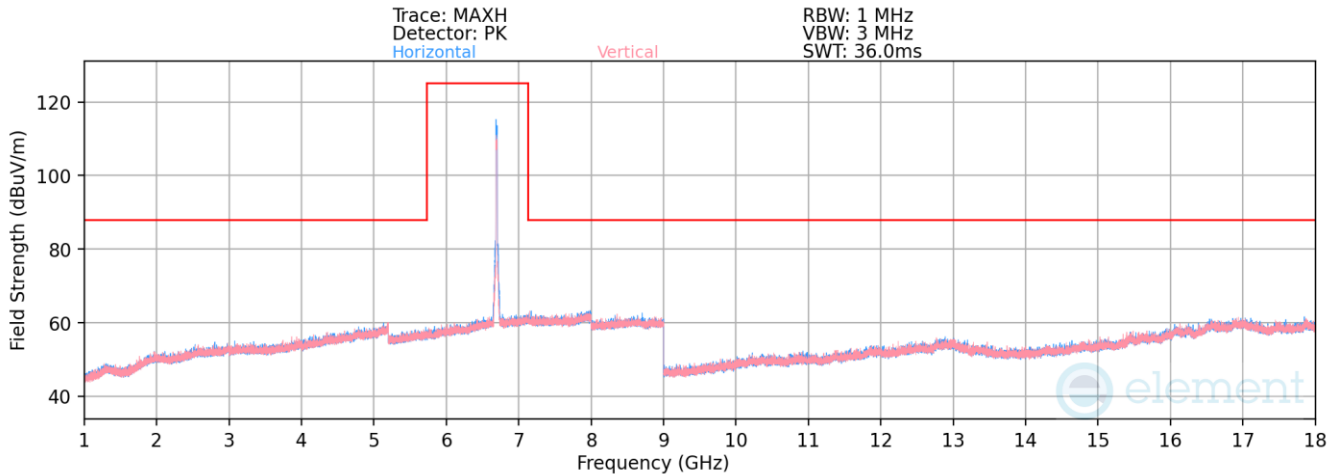


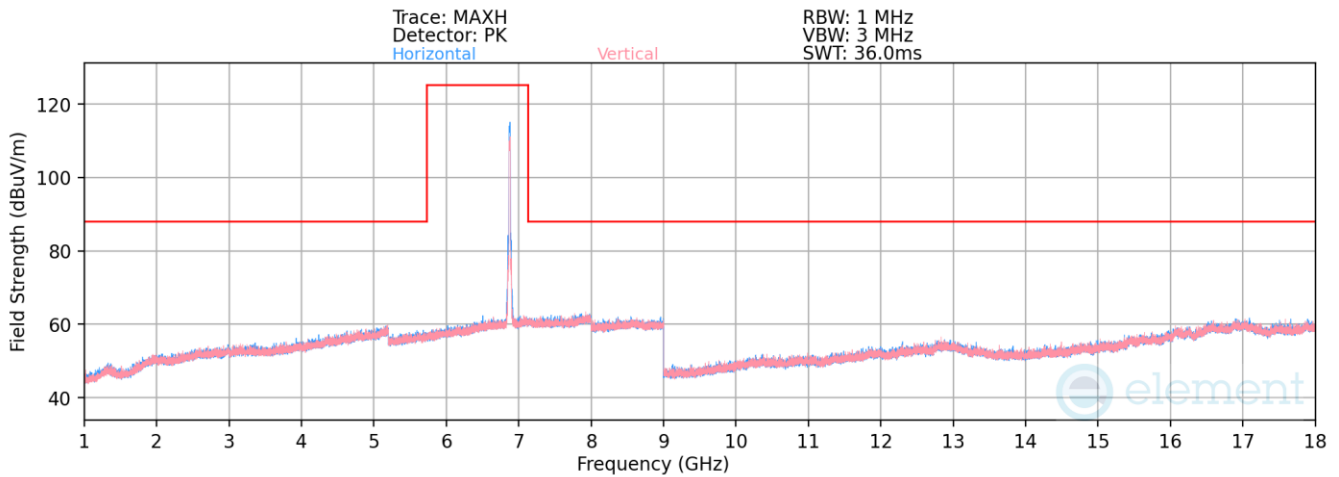
Plot 7-1232. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 149)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 13390.00 | Average | H | - | - | -86.08 | 21.78 | 42.70 | 53.98 | -11.28 |
| * 13390.00 | Peak | H | - | - | -74.30 | 21.78 | 54.48 | 73.98 | -19.50 |

Table 7-208. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 398 of 511 |



Plot 7-1233. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 185)

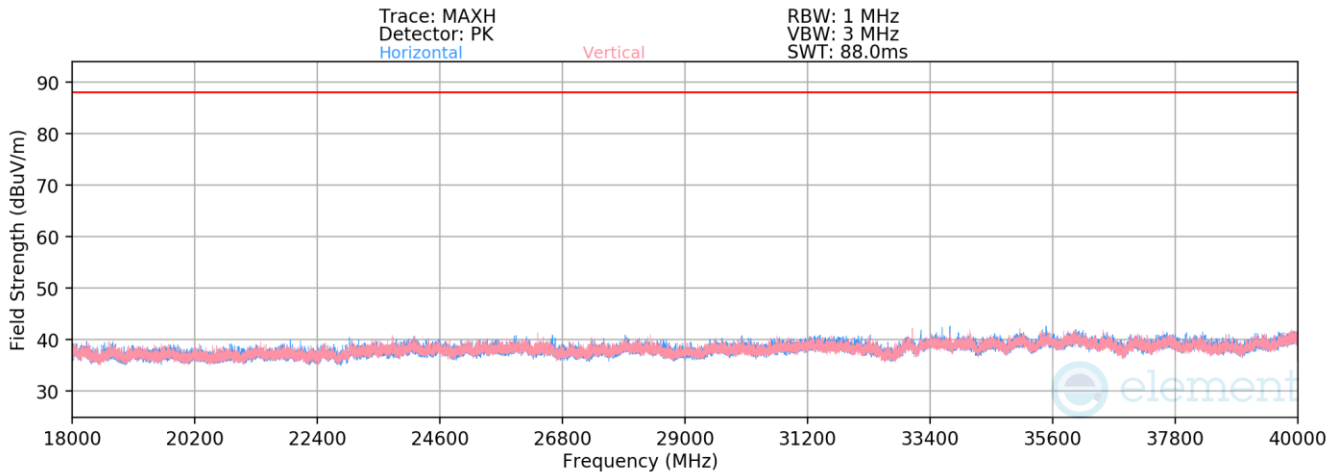


Plot 7-1234. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 185)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13750.00 | Average | V | - | - | -86.30 | 21.34 | 42.04 | 68.23 | -26.19 |
| 13750.00 | Peak | V | - | - | -74.70 | 21.35 | 53.65 | 88.23 | -34.58 |

Table 7-209. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|--|--|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 399 of 511 |

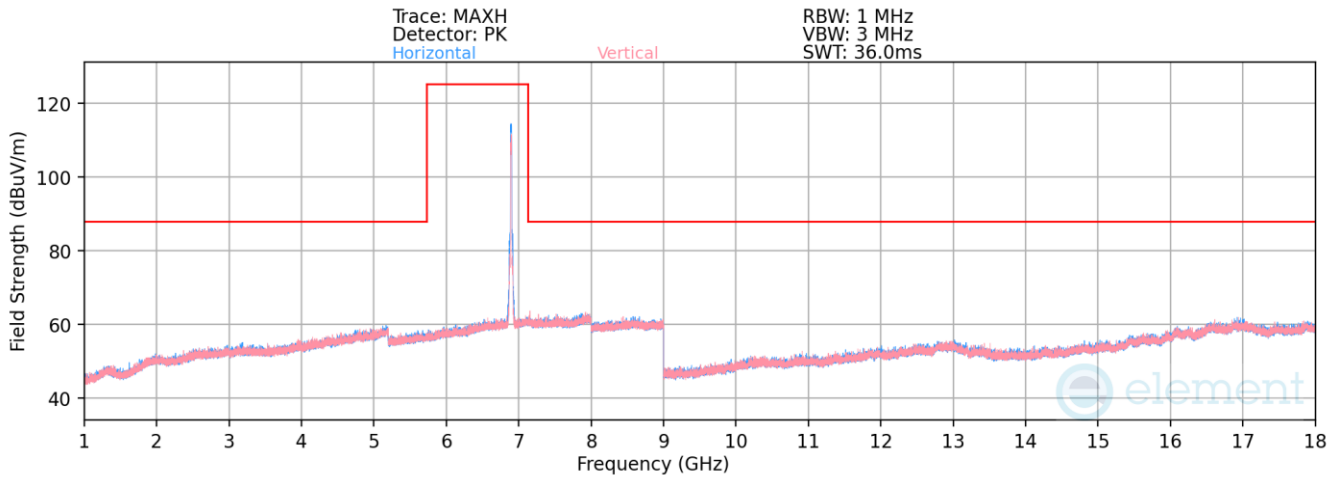

Plot 7-1235. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 189)

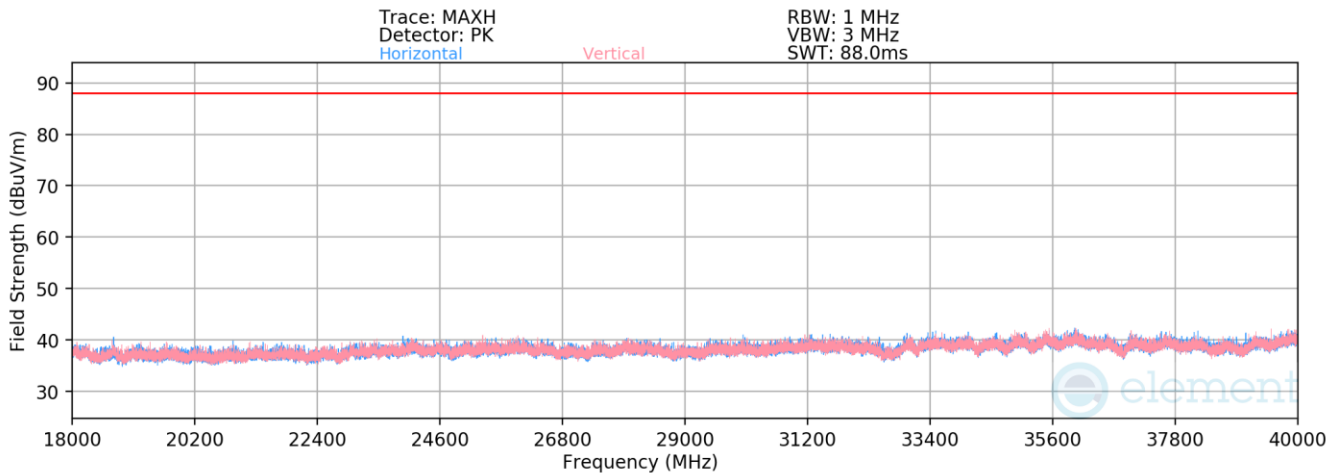


Plot 7-1236. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 189)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13790.00 | Average | V | - | - | -86.33 | 21.78 | 42.45 | 68.23 | -25.78 |
| 13790.00 | Peak | V | - | - | -74.35 | 21.49 | 54.15 | 88.23 | -34.08 |

Table 7-210. Radiated Spurious Emission Measurements SDM Primary

| | | | | |
|--|--|---------------------------------------|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 400 of 511 |

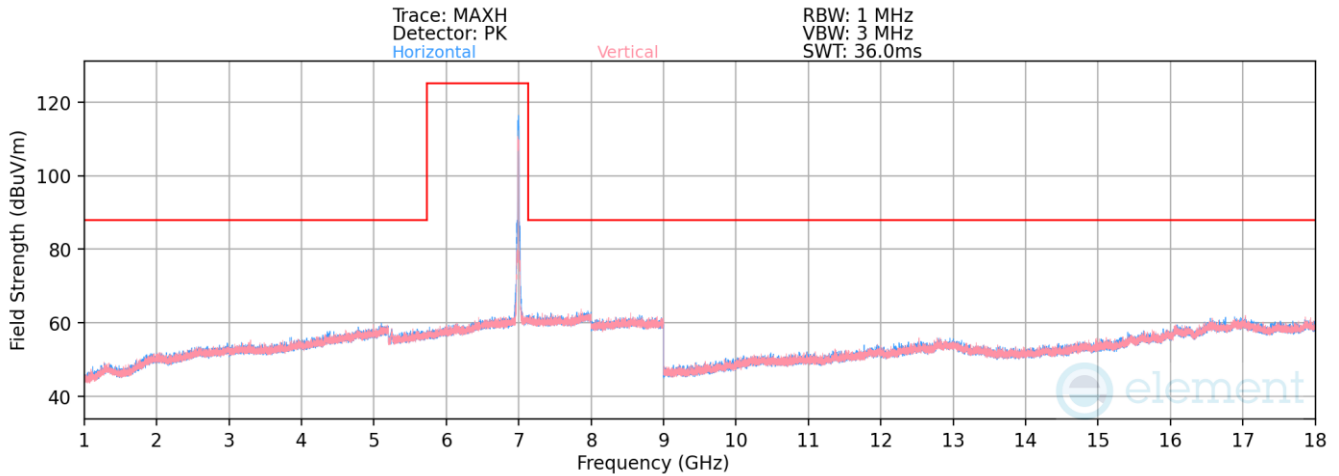


Plot 7-1237. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 209)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13990.00 | Average | H | - | - | -86.77 | 21.93 | 42.16 | 68.23 | -26.07 |
| 13990.00 | Peak | H | - | - | -75.19 | 21.93 | 53.74 | 88.23 | -34.49 |

Table 7-211. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 401 of 511 |

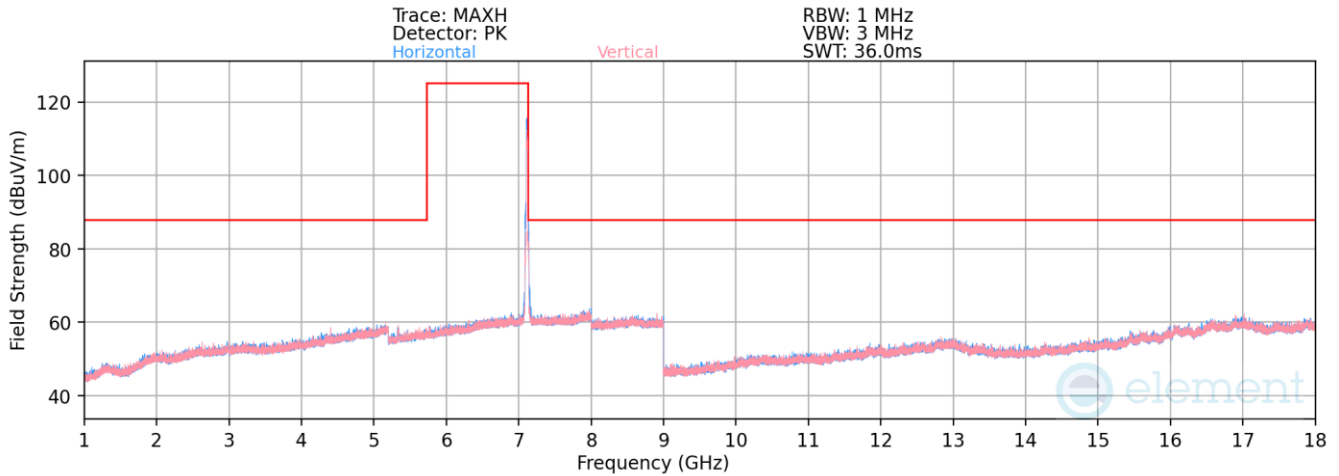

Plot 7-1238. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 233)


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 14230.00 | Average | H | - | - | -86.27 | 21.94 | 42.67 | 68.23 | -25.56 |
| 14230.00 | Peak | H | - | - | -75.33 | 22.04 | 53.71 | 88.23 | -34.52 |

Table 7-212. Radiated Spurious Emission Measurements SDM Primary

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 402 of 511 |

7.7.5 SDM Diversity Radiated Spurious Emission

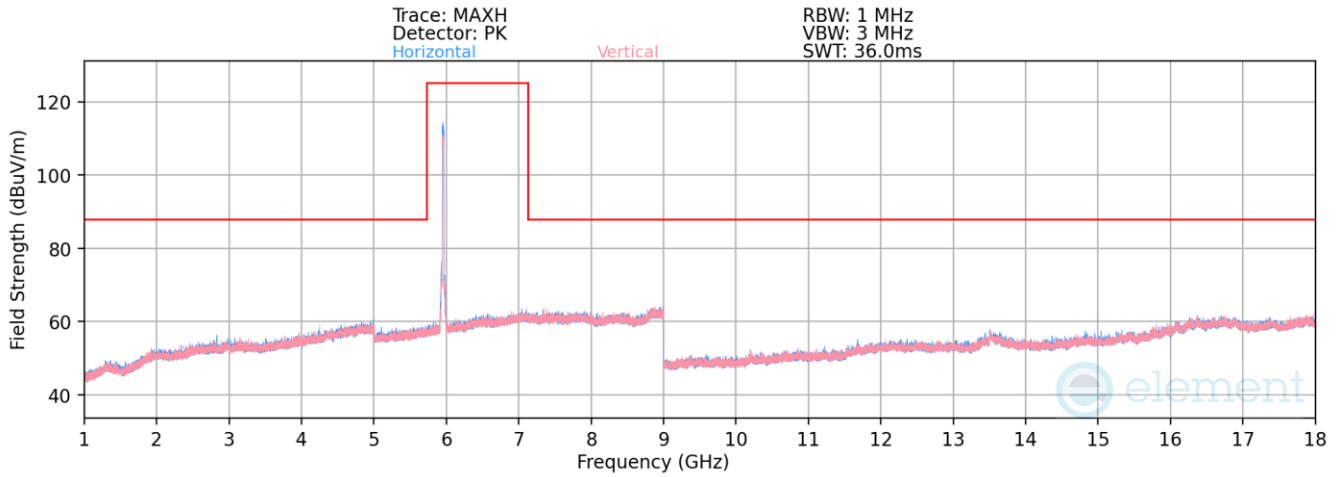


Plot 7-1239. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 1)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11910.00 | Average | V | - | - | -84.64 | 20.35 | 42.71 | 53.98 | -11.27 |
| * 11910.00 | Peak | V | - | - | -72.79 | 20.35 | 54.56 | 73.98 | -19.42 |
| * 17865.00 | Average | H | - | - | -85.38 | 28.22 | 45.87 | 53.98 | -8.11 |
| * 17865.00 | Peak | H | - | - | -73.55 | 27.97 | 57.46 | 73.98 | -16.52 |

Table 7-213. Radiated Spurious Emission Measurements SDM Diversity

| | | | | |
|--|--|---|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 403 of 511 |

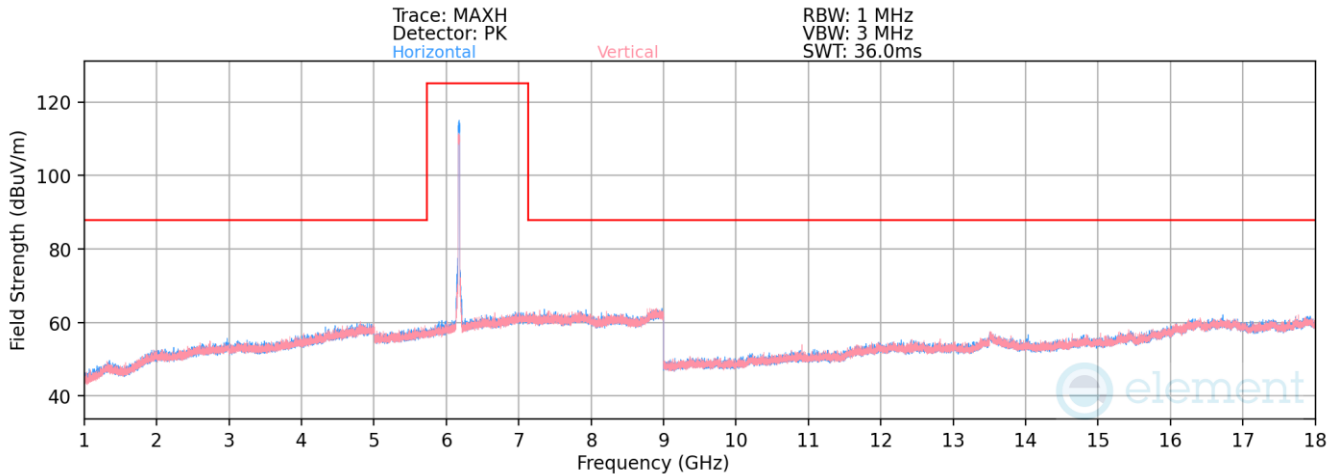


Plot 7-1240. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 45)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 12350.00 | Average | V | - | - | -84.83 | 20.67 | 42.84 | 53.98 | -11.14 |
| * 12350.00 | Peak | V | - | - | -73.09 | 20.69 | 54.60 | 73.98 | -19.38 |

Table 7-214. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 404 of 511 |

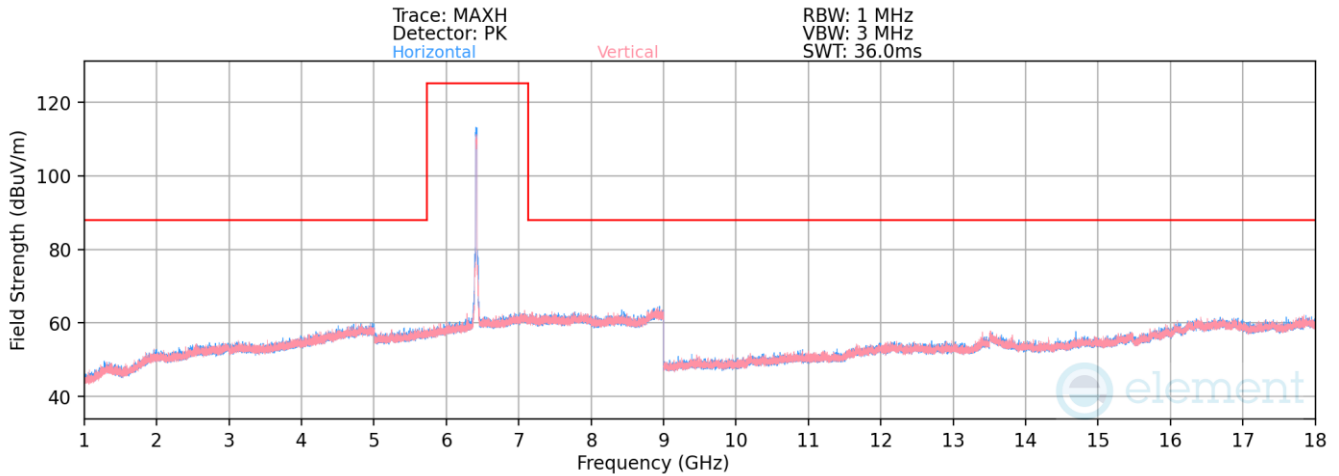


Plot 7-1241. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 93)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12830.00 | Average | H | - | - | -85.74 | 21.68 | 42.94 | 68.23 | -25.29 |
| 12830.00 | Peak | H | - | - | -74.00 | 21.68 | 54.68 | 88.23 | -33.55 |

Table 7-215. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 405 of 511 |

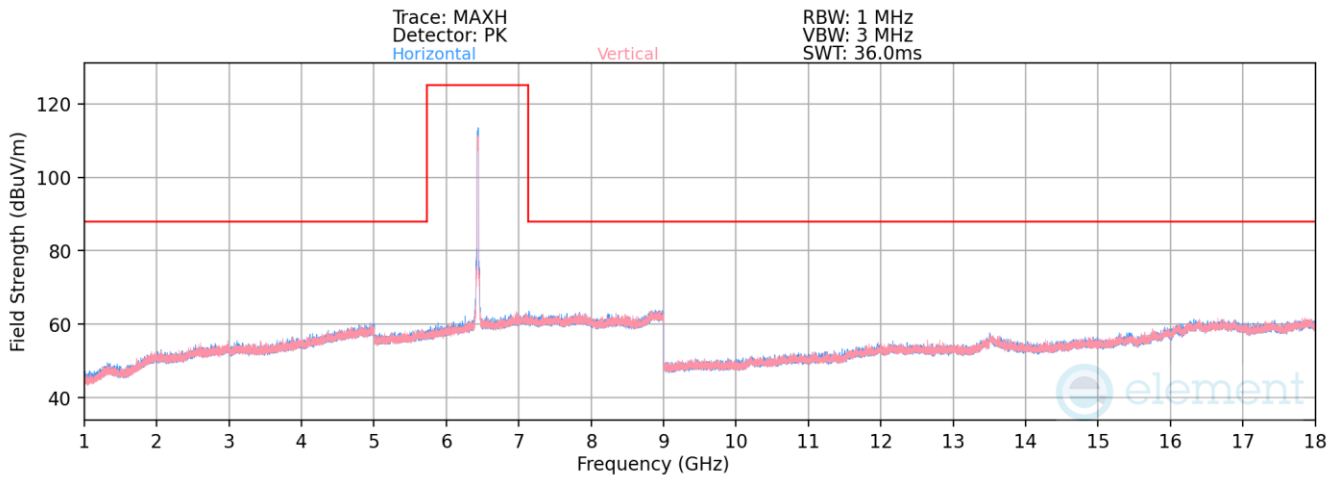


Plot 7-1242. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 97)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12870.00 | Average | H | - | - | -85.83 | 21.49 | 42.66 | 68.23 | -25.57 |
| 12870.00 | Peak | H | - | - | -73.92 | 21.36 | 54.44 | 88.23 | -33.79 |

Table 7-216. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 406 of 511 |

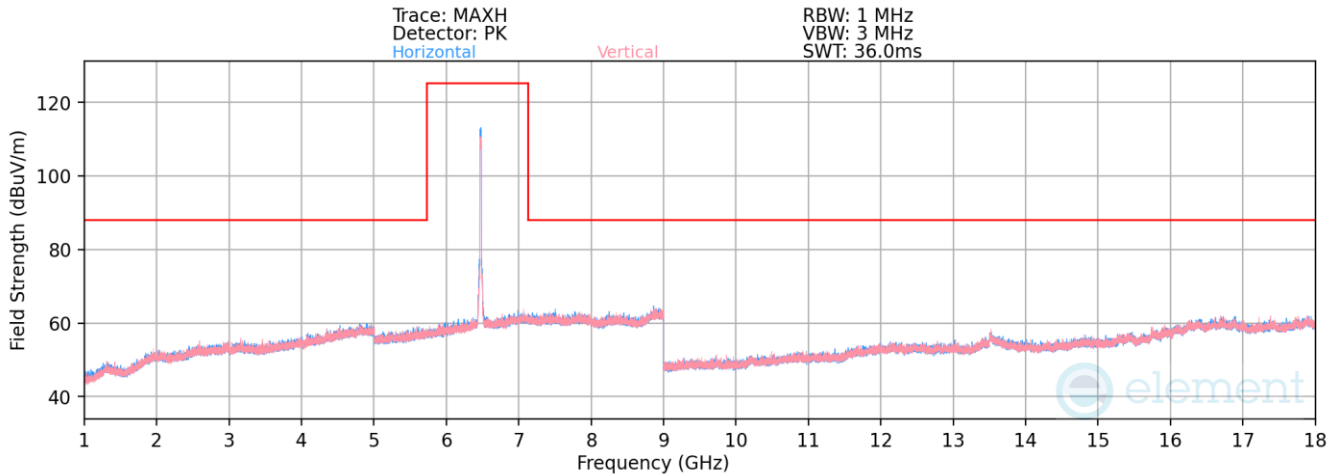


Plot 7-1243. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 105)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 12950.00 | Average | V | - | - | -85.84 | 21.57 | 42.73 | 68.23 | -25.50 |
| 12950.00 | Peak | V | - | - | -74.22 | 21.47 | 54.26 | 88.23 | -33.97 |

Table 7-217. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 407 of 511 |

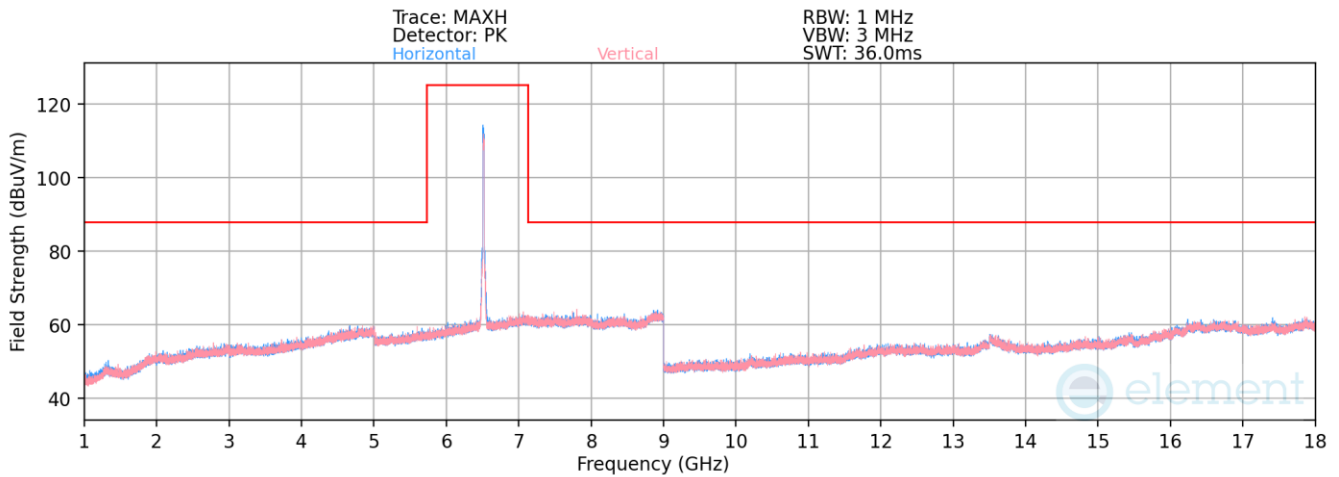


Plot 7-1244. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 113)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13030.00 | Average | V | - | - | -85.40 | 21.92 | 43.53 | 68.23 | -24.70 |
| 13030.00 | Peak | V | - | - | -74.07 | 21.92 | 54.85 | 88.23 | -33.38 |

Table 7-218. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 408 of 511 |

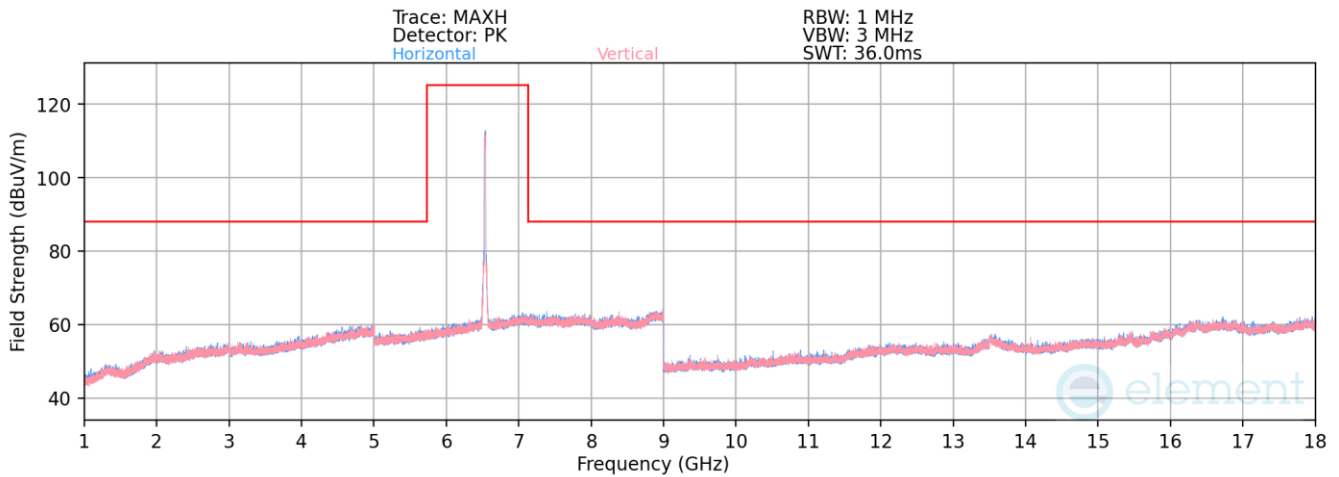


Plot 7-1245. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 117)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13070.00 | Average | V | - | - | -85.29 | 21.60 | 43.32 | 68.23 | -24.91 |
| 13070.00 | Peak | V | - | - | -73.61 | 21.48 | 54.87 | 88.23 | -33.36 |

Table 7-219. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|--|---|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 409 of 511 |

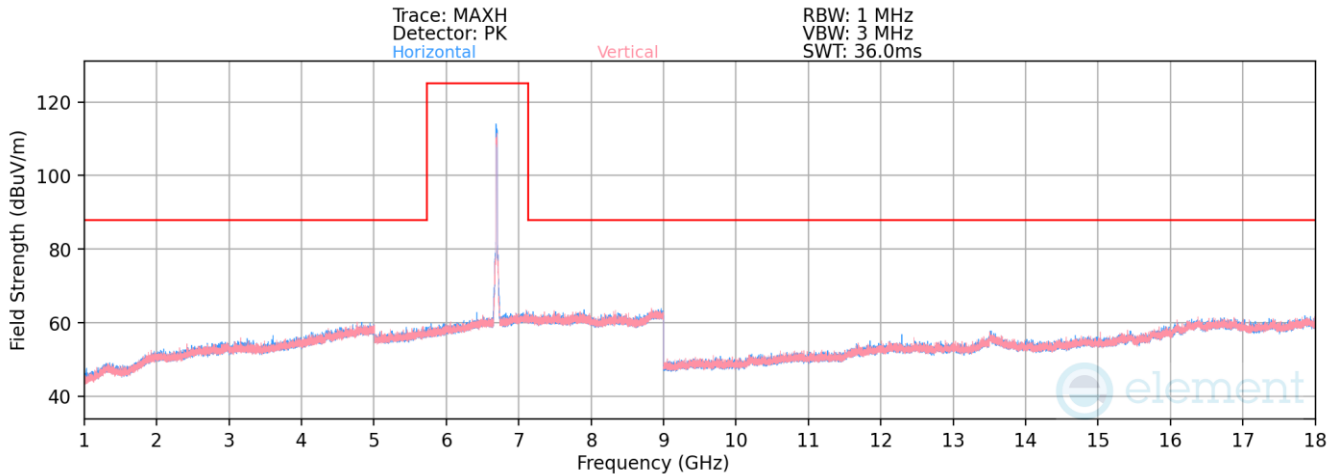


Plot 7-1246. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 149)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 13390.00 | Average | V | - | - | -85.02 | 21.78 | 43.76 | 68.23 | -24.47 |
| * 13390.00 | Peak | V | - | - | -73.75 | 21.78 | 55.03 | 88.23 | -33.20 |

Table 7-220. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 410 of 511 |

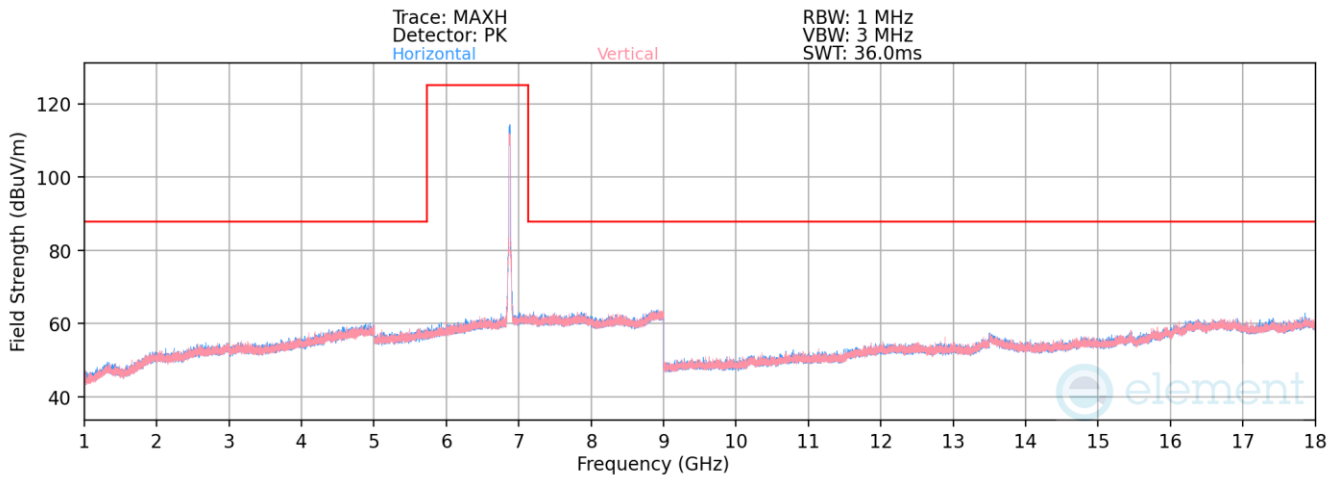

Plot 7-1247. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 185)

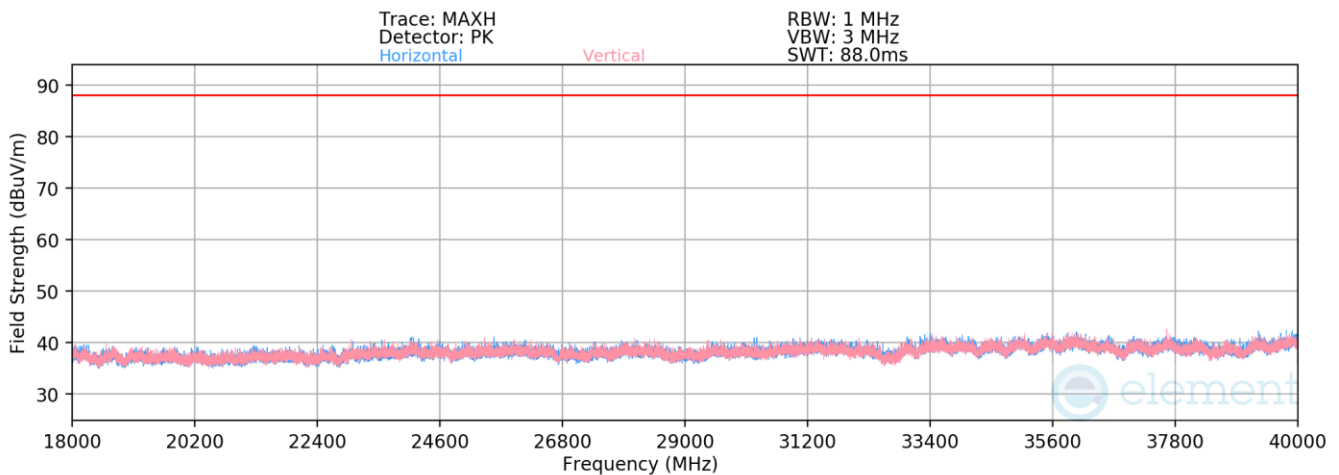


Plot 7-1248. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11ax – Ch. 185)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13750.00 | Average | V | - | - | -84.71 | 21.35 | 43.64 | 68.23 | -24.59 |
| 13750.00 | Peak | V | - | - | -73.03 | 21.34 | 55.32 | 88.23 | -32.91 |

Table 7-221. Radiated Spurious Emission Measurements SDM Diversity

| | | | | |
|--|--|---------------------------------------|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 411 of 511 |

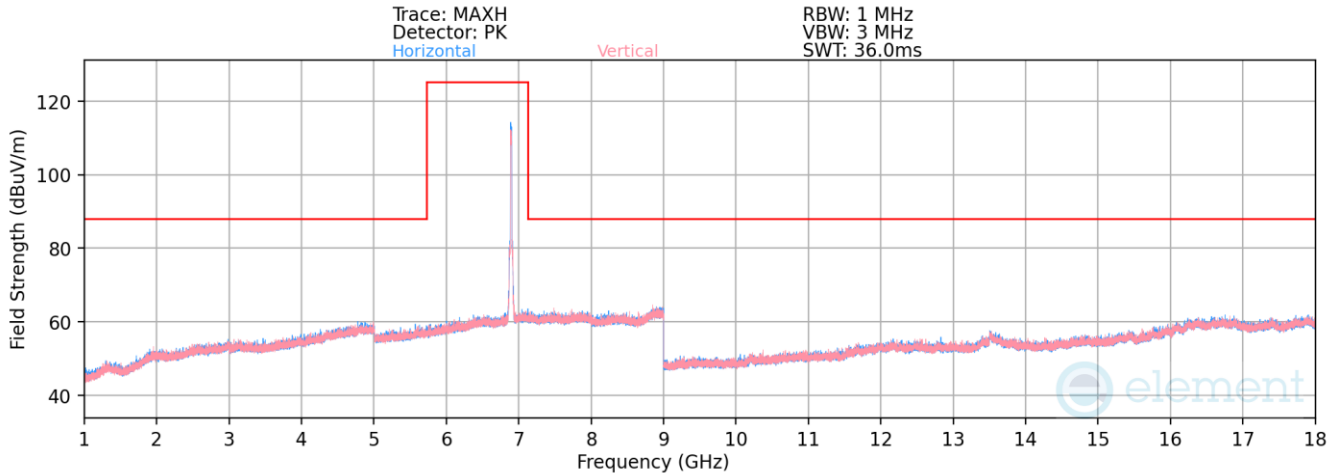

Plot 7-1249. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 189)

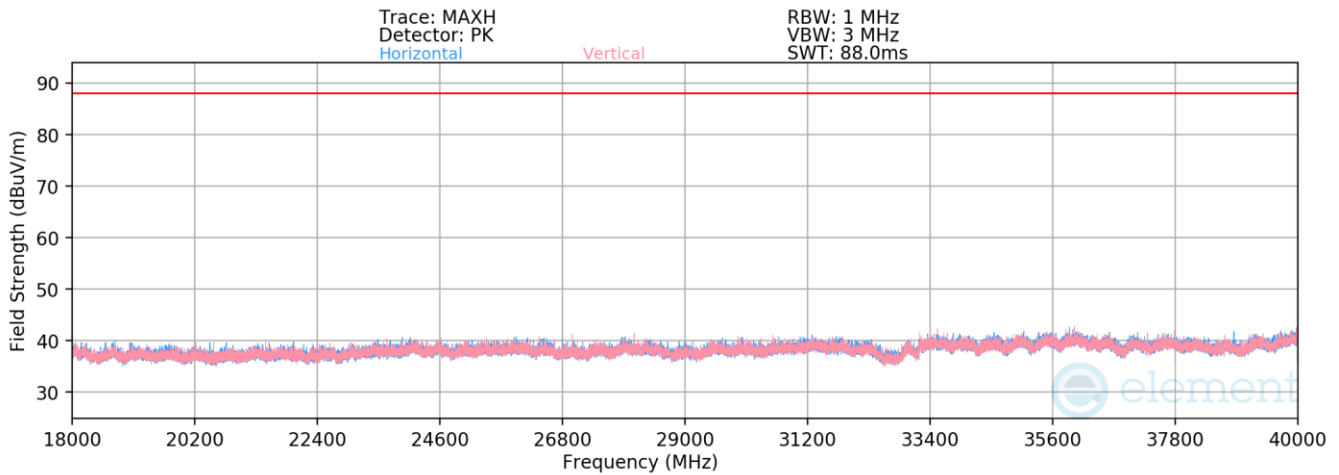


Plot 7-1250. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11ax – Ch. 189)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13790.00 | Average | V | - | - | -84.55 | 21.49 | 43.95 | 68.23 | -24.28 |
| 13790.00 | Peak | V | - | - | -73.35 | 21.78 | 55.43 | 88.23 | -32.80 |

Table 7-222. Radiated Spurious Emission Measurements SDM Diversity

| | | | | |
|--|--|---------------------------------------|--|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | | Page 412 of 511 |

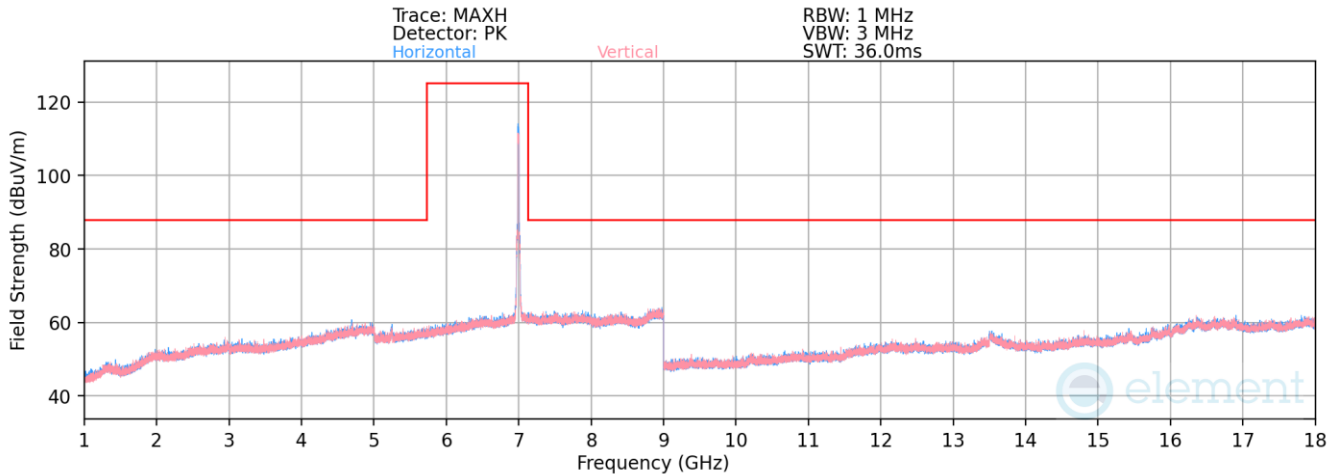


Plot 7-1251. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 209)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 13990.00 | Average | H | - | - | -85.56 | 21.84 | 43.28 | 68.23 | -24.95 |
| 13990.00 | Peak | H | - | - | -74.04 | 21.93 | 54.89 | 88.23 | -33.34 |

Table 7-223. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 413 of 511 |

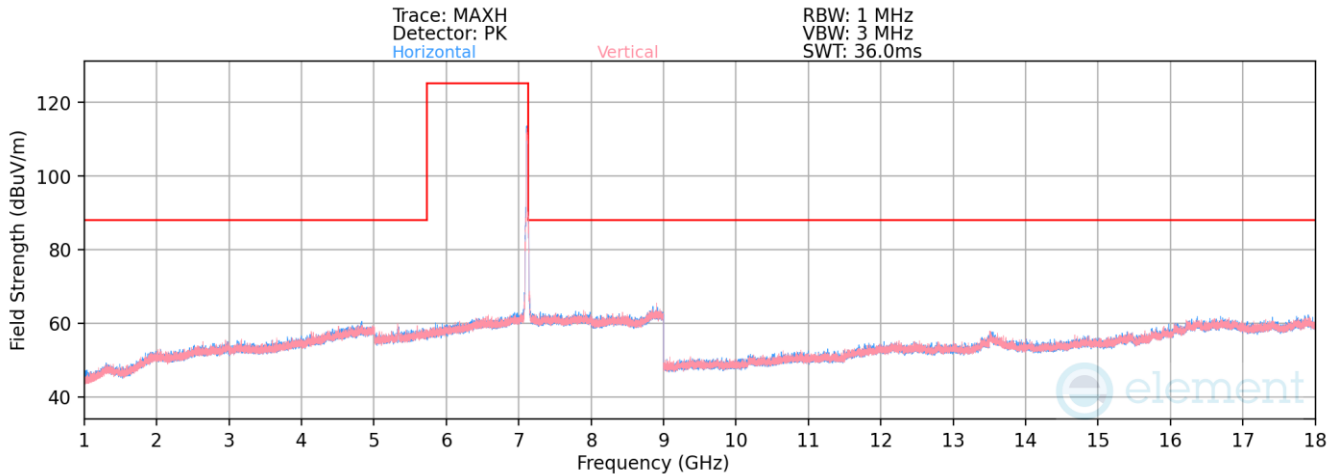

Plot 7-1252. Radiated Spurious Emissions above 1GHz SDM Diversity (802.11ax – Ch. 233)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 14230.00 | Average | H | - | - | -85.50 | 22.31 | 43.82 | 68.23 | -24.41 |
| 14230.00 | Peak | H | - | - | -74.10 | 22.31 | 55.22 | 88.23 | -33.01 |

Table 7-224. Radiated Spurious Emission Measurements SDM Diversity

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 414 of 511 |


7.7.6 Antenna WF5B Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11a |
| Worst Case Transfer Rate: | 12Mbps |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5955MHz |
| Channel: | 1 |

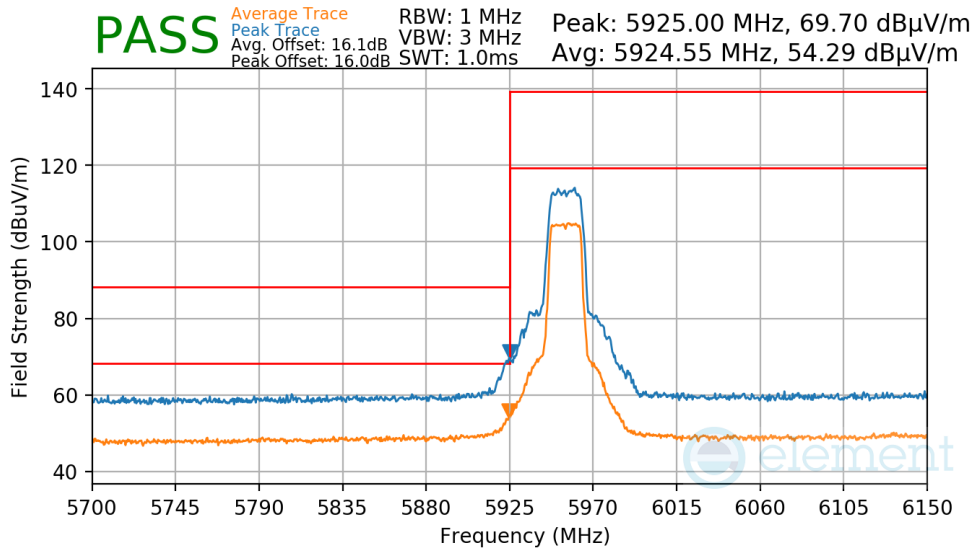

Plot 7-1253. Antenna WF5B Radiated Lower Band Edge (Peak/Average – UNII Band 5)


| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11a |
| Worst Case Transfer Rate: | 24Mbps |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5955MHz |
| Channel: | 1 |

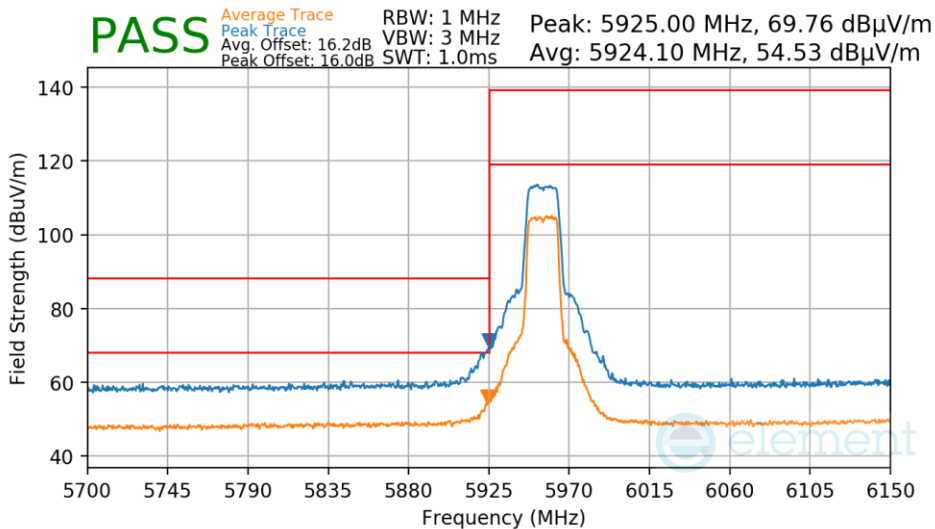

Plot 7-1254. Antenna WF5B Radiated Lower Band Edge (Peak/Average – UNII Band 5)


| | | | |
|--|--|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 415 of 511 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 54Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

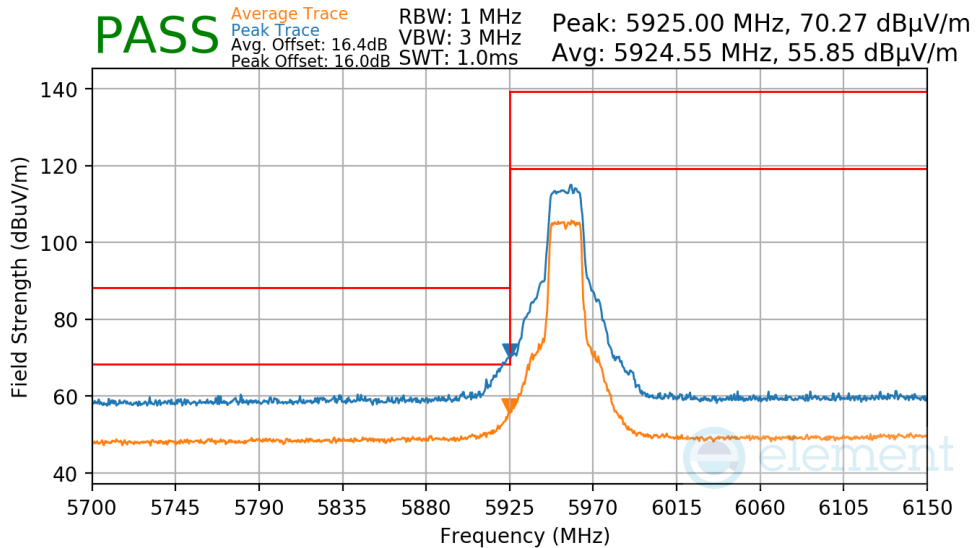

Plot 7-1255. Antenna WF5B Radiated Lower Band Edge (Peak/Average – UNII Band 5)


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 12Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

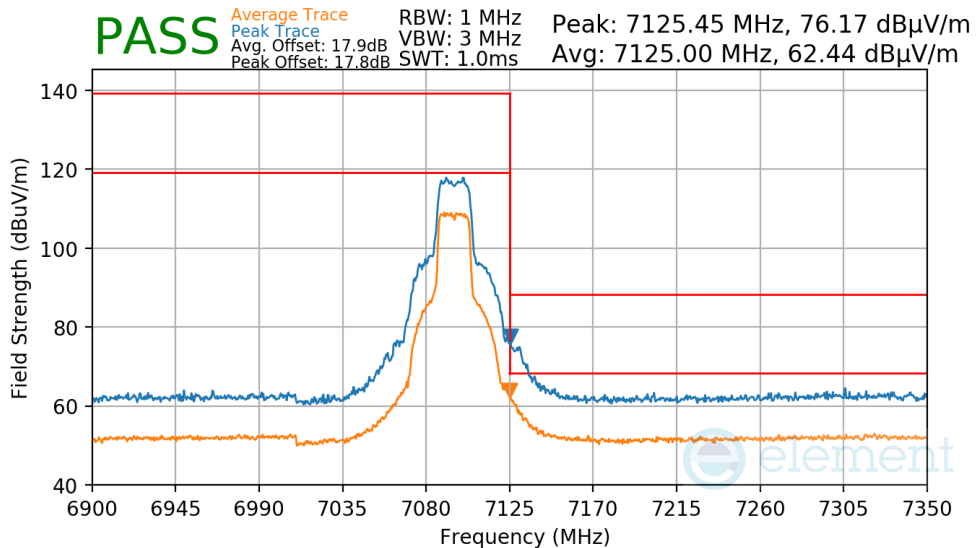

Plot 7-1256. Antenna WF5B Radiated Upper Band Edge (Peak/Average – UNII Band 8)


| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 416 of 511 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 24Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

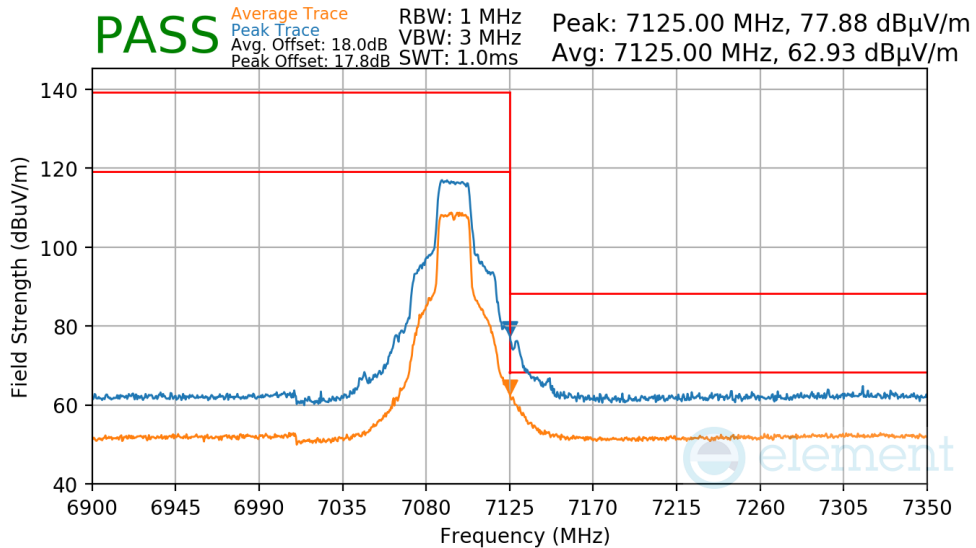

Plot 7-1257. Antenna WF5B Radiated Upper Band Edge (Peak/Average – UNII Band 8)


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 54Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

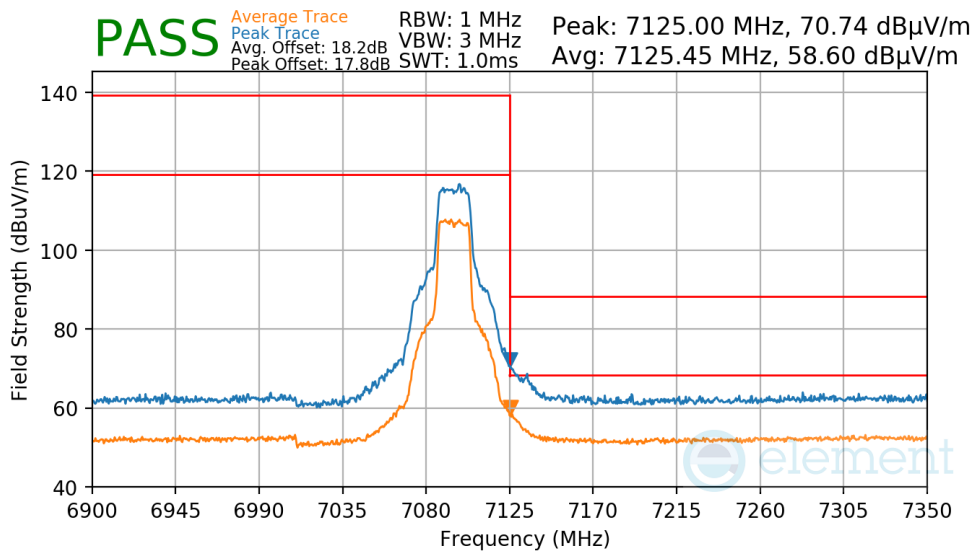


Plot 7-1258. Antenna WF5B Radiated Upper Band Edge (Peak/Average – UNII Band 8)

| | | | |
|--|--|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 417 of 511 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 12Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

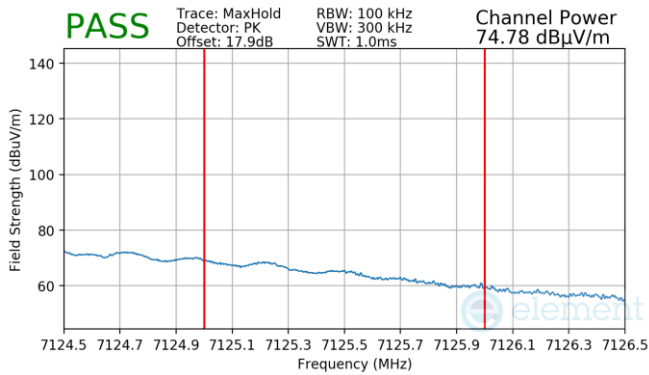


Plot 7-1259. Antenna WF5B Radiated Upper Band Edge (Peak – UNII Band 8)

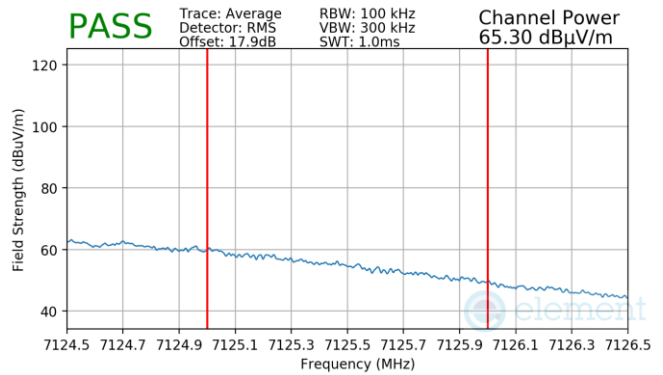


Plot 7-1260. Antenna WF5B Radiated Upper Band Edge (Average – UNII Band 8)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 24Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

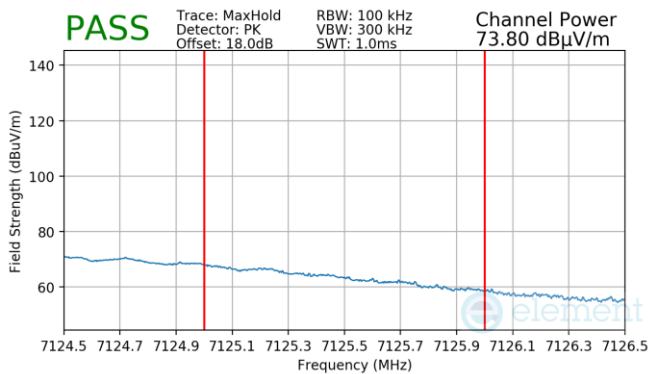


Plot 7-1261. Antenna WF5B Radiated Upper Band Edge (Peak – UNII Band 8)

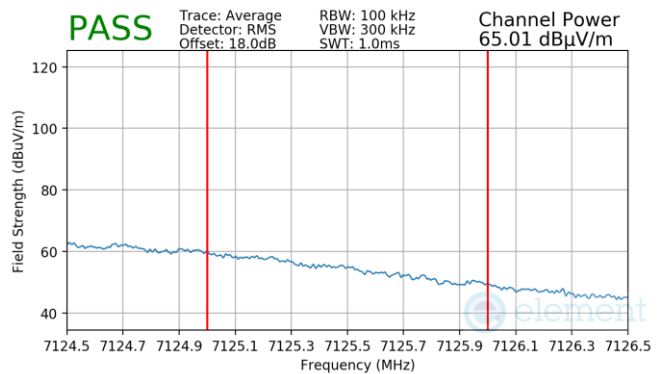


Plot 7-1262. Antenna WF5B Radiated Upper Band Edge (Average – UNII Band 8)

| | | | |
|--|--|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 418 of 511 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 54Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

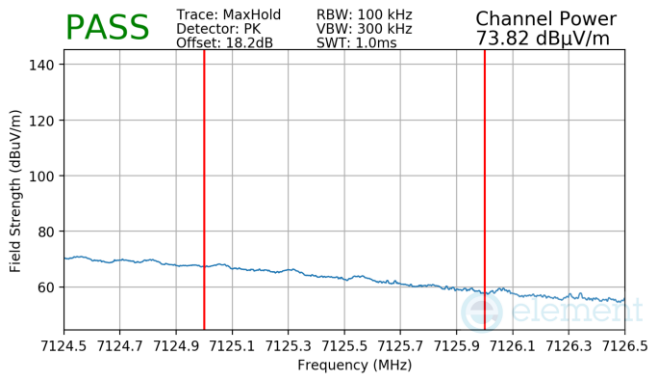


Plot 7-1263. Antenna WF5B Radiated Upper Band Edge (Peak – UNII Band 8)

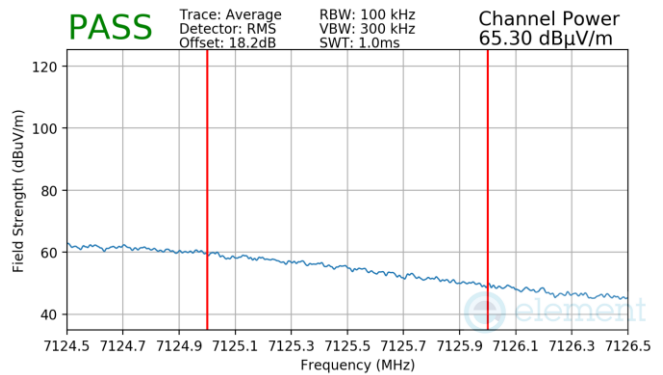

Plot 7-1264. Antenna WF5B Radiated Upper Band Edge (Average – UNII Band 8)


| | | | |
|---|---|-----------------------------------|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 419 of 511 |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

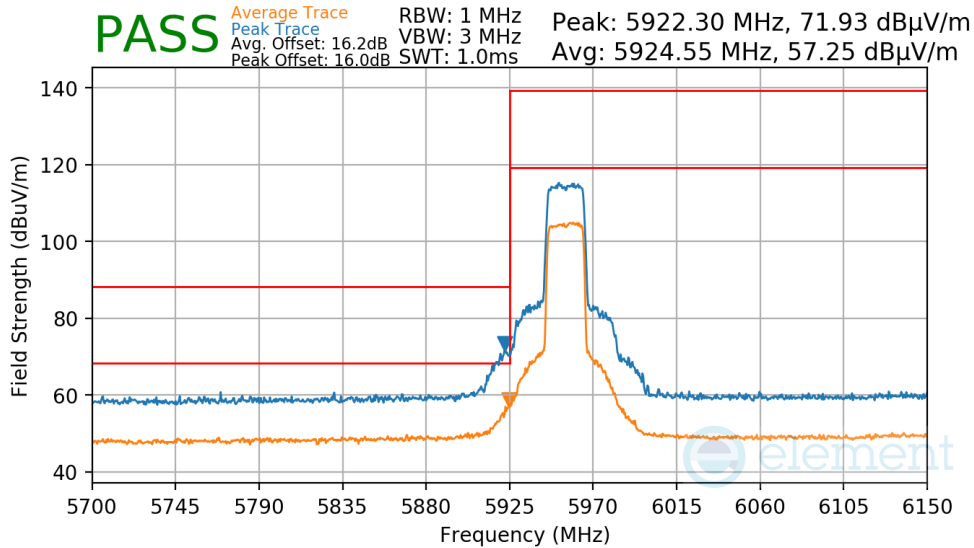

Plot 7-1265. Antenna WF5B Radiated Lower Band Edge (Peak/Average – UNII Band 5)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS4
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

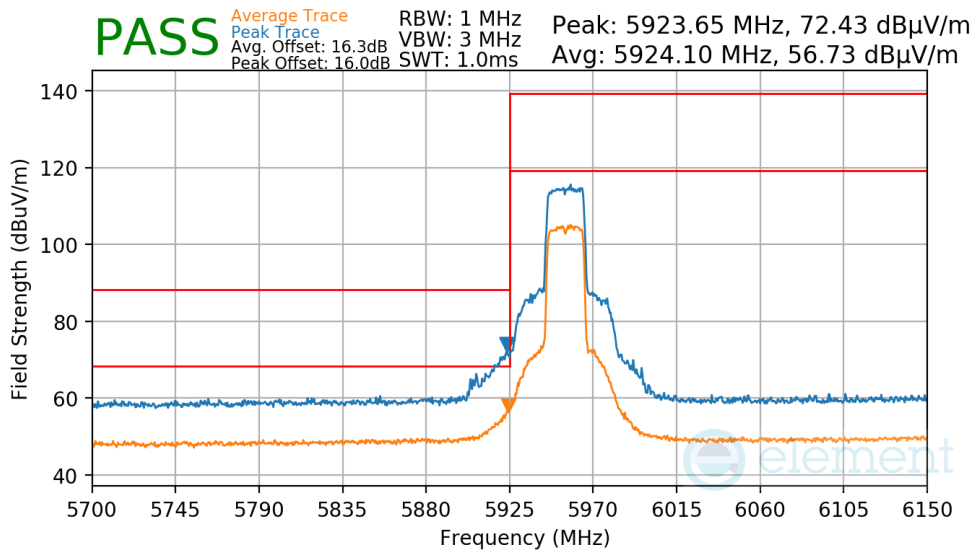

Plot 7-1266. Antenna WF5B Radiated Lower Band Edge (Peak/Average – UNII Band 5)


| | | | |
|--|---|---|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 420 of 511 |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

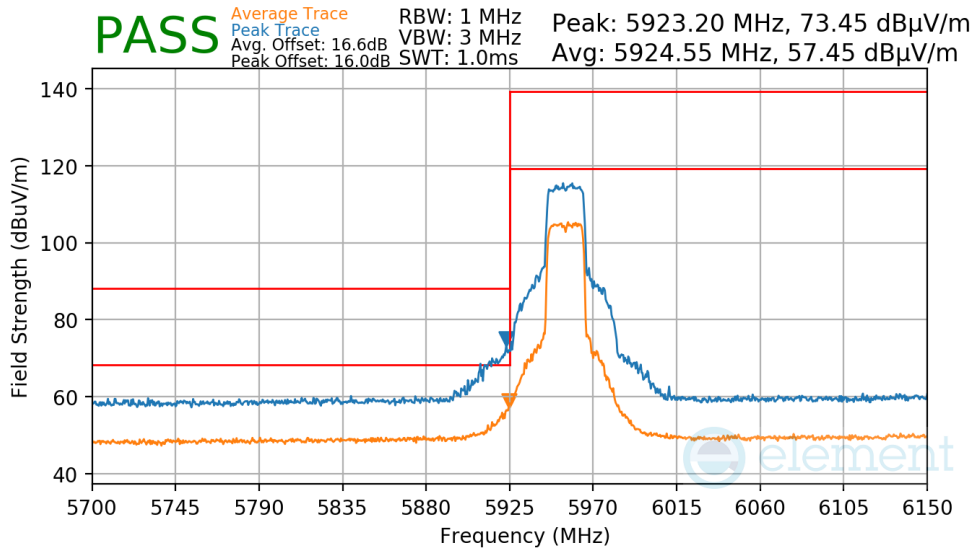

Plot 7-1267. Antenna WF5B Radiated Lower Band Edge (Peak/Average – UNII Band 5)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

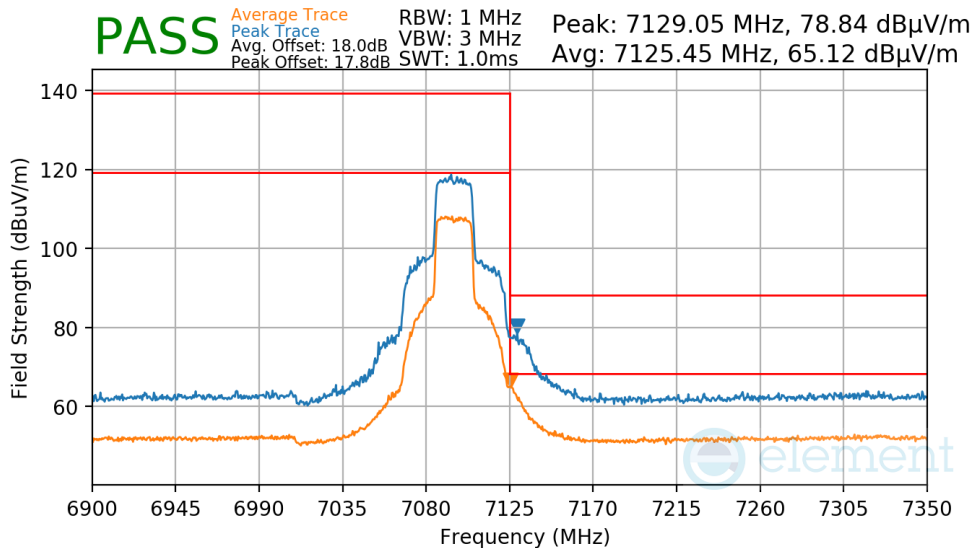

Plot 7-1268. Antenna WF5B Radiated Upper Band Edge (Peak/Average – UNII Band 8)


| | | | |
|--|--|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 421 of 511 |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS4
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

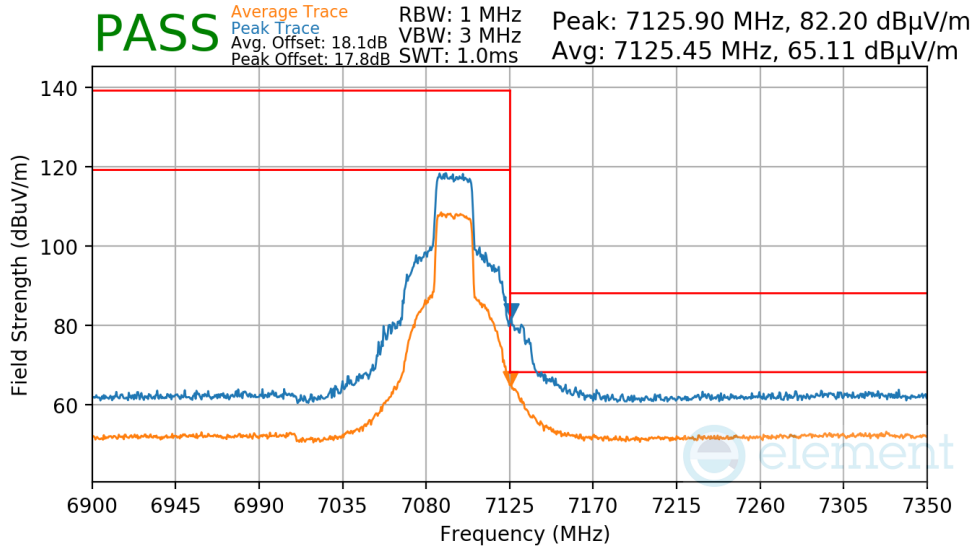

Plot 7-1269. Antenna WF5B Radiated Upper Band Edge (Peak/Average – UNII Band 8)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229

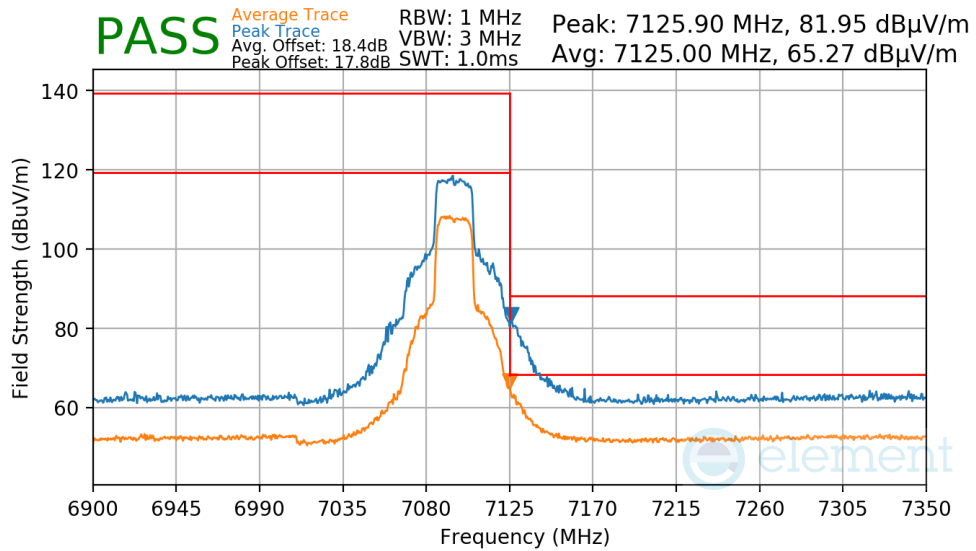


Plot 7-1270. Antenna WF5B Radiated Upper Band Edge (Peak/Average – UNII Band 8)

| | | | |
|--|---|---------------------------------------|-----------------------------------|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 422 of 511 |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

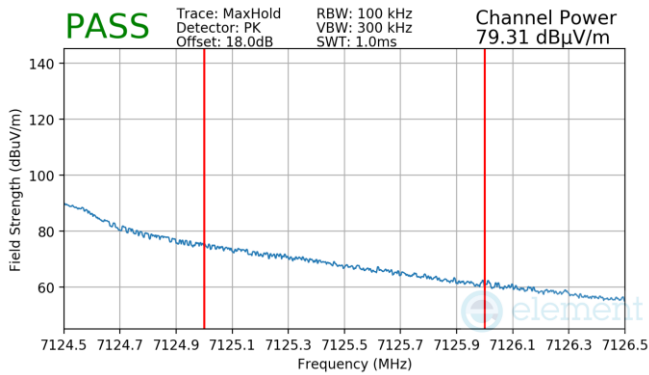


Plot 7-1271. Antenna WF5B Radiated Upper Band Edge (Peak – UNII Band 8)

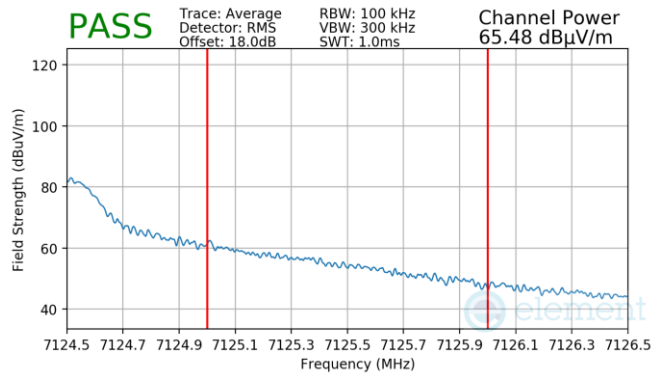


Plot 7-1272. Antenna WF5B Radiated Upper Band Edge (Average – UNII Band 8)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS4
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

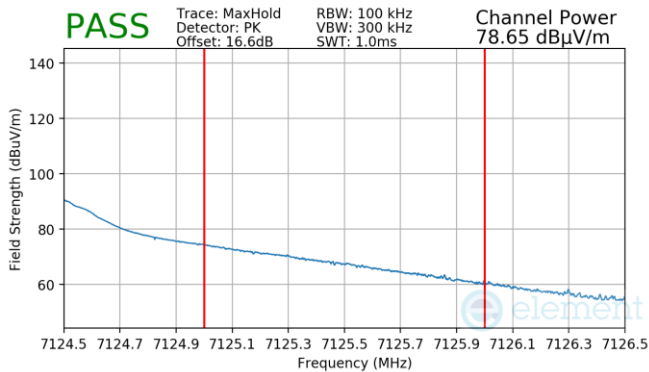


Plot 7-1273. Antenna WF5B Radiated Upper Band Edge (Peak – UNII Band 8)

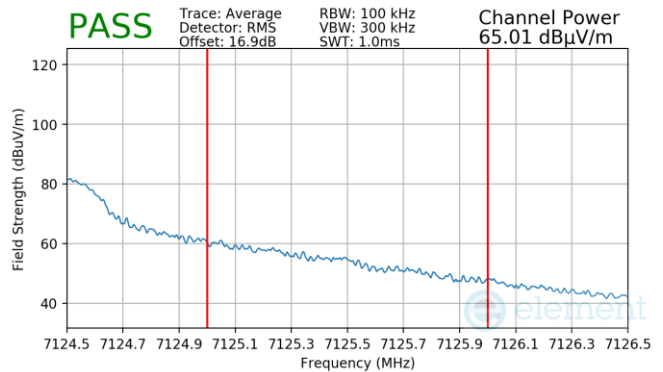


Plot 7-1274. Antenna WF5B Radiated Upper Band Edge (Average – UNII Band 8)

| | | | |
|---|---|---|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 423 of 511 |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS11
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

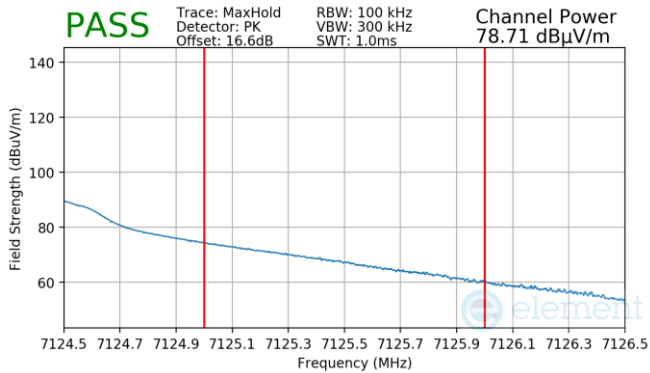

Plot 7-1275. Antenna WF5B Radiated Upper Band Edge (Peak – UNII Band 8)

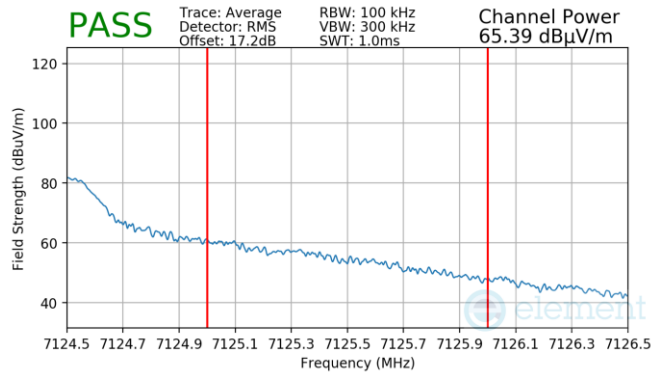

Plot 7-1276. Antenna WF5B Radiated Upper Band Edge (Average – UNII Band 8)

| | | | |
|---|---|-----------------------------------|--|
| FCC ID: BCGA2926 IC: 579C-A2926 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1C2311270070-24-R1.BCG | Test Dates: 11/30/2023 - 04/05/2024 | EUT Type: Tablet Device | Page 424 of 511 |