

TEST REPORT

Test Report No. : UL-RPT-RP14614879JD02C

Customer : Apple Inc.
Model No. / HVIN : A2992
PMN : MacBook Pro
FCC ID : BCGA2992
ISED Certification No. : IC: 579C-A2992
Technology : *Bluetooth* – BDR & EDR (Low Power Mode)
Test Standard(s) : FCC Parts 15.209(a) & 15.247
Innovation, Science and Economic Development Canada
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 February 2021
Test Laboratory : UL International (UK) Ltd, Basingstoke, Hampshire, RG24 8AH,
United Kingdom

1. This test report shall not be reproduced except in full, without the written approval of UL International (UK) Ltd.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0.

Date of Issue: 03 October 2023

Checked by:



Ben Mercer
Lead Project Engineer, Radio Laboratory

Ben Mercer Digitally signed
by Ben Mercer
Date: 2023.10.03
15:28:24 +01'00'

Company Signatory:



Sarah Williams
RF Operations Leader, Radio Laboratory

Sarah Williams Digitally signed
by Sarah Williams
Date: 2023.10.03
15:28:47 +01'00'



The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL International (UK) Ltd is under licence. Other trademarks and trade names are those of their respective owners.

UL International (UK) LTD

Unit 1-3 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK
Telephone: +44 (0)1256 312000

Customer Information

Company Name:	Apple Inc.
Address:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	03/10/2023	Initial Version	Ben Mercer

Table of Contents

Customer Information.....	2
Report Revision History	2
Table of Contents.....	3
1 Attestation of Test Results.....	4
1.1 Description of EUT	4
1.2 General Information	4
1.3 Summary of Test Results	5
1.4 Deviations from the Test Specification	5
2 Summary of Testing.....	6
2.1 Facilities and Accreditation	6
2.2 Methods and Procedures	6
2.3 Calibration and Uncertainty	7
2.4 Test and Measurement Equipment	8
3 Equipment Under Test (EUT)	10
3.1 Identification of Equipment Under Test (EUT)	10
3.2 Modifications Incorporated in the EUT	11
3.3 Additional Information Related to Testing	12
3.4 Description of Available Antennas	12
3.5 Description of Test Setup	13
4 Antenna Port Test Results	20
4.1 Transmitter 99% Emission Bandwidth	20
4.2 Transmitter 20 dB Bandwidth	26
4.3 Transmitter Carrier Frequency Separation	33
4.4 Transmitter Number of Hopping Frequencies and Average Time of Occupancy	36
4.5 Transmitter Maximum Peak Output Power	39
5 Radiated Test Results.....	47
5.1 Transmitter Radiated Emissions <1 GHz	47
5.2 Transmitter Radiated Emissions >1 GHz	49
5.3 Transmitter Band Edge Radiated Emissions	51
Appendix 1	100
FHSS Duty Cycle Correction Factor Calculation	100

1 Attestation of Test Results

1.1 Description of EUT

The equipment under test (EUT) was a portable laptop computer.

1.2 General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.209
Specification Reference:	RSS-Gen Issue 5 February 2021
Specification Title:	General Requirements for Compliance of Radio Apparatus
Specification Reference:	RSS-247 Issue 2 February 2017
Specification Title:	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
Site Registration:	FCC: 685609, ISEDC: 20903
FCC Lab. Designation No.:	UK2011
ISEDC CABID:	UK0001
Location of Testing:	Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	11 July 2023 to 06 September 2023

1.3 Summary of Test Results

FCC Reference (47CFR)	ISED Canada Reference	Measurement	Result
N/A	RSS-Gen 6.7	Transmitter 99% Occupied Bandwidth	Complied
Part 15.247(a)(1)	RSS-Gen 6.7 / RSS-247 5.1(a)	Transmitter 20 dB Bandwidth	Complied
Part 15.247(a)(1)	RSS-247 5.1(b)	Transmitter Carrier Frequency Separation	Complied
Part 15.247(a)(1)(iii)	RSS-247 5.1(d)	Transmitter Number of Hopping Frequencies and Average Time of Occupancy	Complied
Part 15.247(b)(1)	RSS-Gen 6.12 / RSS-247 5.4(b)	Transmitter Maximum Peak Output Power	Complied
Part 15.247(d) & 15.209(a)	RSS-Gen 6.13 / RSS-247 5.5	Transmitter Radiated Emissions	Complied
Part 15.247(d) & 15.209(a)	RSS-Gen 6.13 / RSS-247 5.5	Transmitter Band Edge Radiated Emissions	Complied

1.4 Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

2 Summary of Testing

2.1 Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	-
Site 17	X

UL International (UK) Ltd is accredited by the United Kingdom Accreditation Service (UKAS). UKAS is one of the signatories to the International Laboratory Accreditation Co-operation (ILAC) Arrangement for the mutual recognition of test reports. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2 Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Title:	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules
Reference:	KDB 662911 D01 Multiple Transmitter Output v02r01 October 31, 2013
Title:	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

2.3 Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty & Decision Rule

Overview

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

Decision Rule

Measurement system instrumentation shall be used with an accuracy specification meeting the accuracy specification limits according to IEC/IECEE OD-5014.

As applicable, unless specified otherwise in this quotation, the compliance "Decision Rule" is based on Simple Acceptance. If the measured value is on the limit, the result is defined as a pass. In this case the risk of a false positive is 50%. For further information regarding risk assessment refer to ILAC G8:09/2019.

Measurement Uncertainty

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
99% Occupied Bandwidth	2.4 GHz to 2.4835 GHz	95%	±3.92 %
20 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±4.59 %
Carrier Frequency Separation	2.4 GHz to 2.4835 GHz	95%	±4.59 %
Average Time of Occupancy	2.4 GHz to 2.4835 GHz	95%	±3.53 ns
Conducted Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	±0.58 dB
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±5.32 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±3.30 dB
Radiated Spurious Emissions	1 GHz to 25 GHz	95%	±3.16 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4 Test and Measurement Equipment

Test Equipment Used for Transmitter Conducted Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2071	Thermohygrometer	Testo	608-H1	45258132	09 Dec 2023	12
M231909	Signal Analyser	Keysight	N9020B	MY63430168	01 Dec 2023	12
A237326	Attenuator	Pasternack	PE7013-10	#17	Calibrated before use	-
A237327	Attenuator	Pasternack	PE7013-10	#18	Calibrated before use	-
A237328	Attenuator	Pasternack	PE7013-10	#19	Calibrated before use	-
M2019	RF Power Sensor	Boonton	55006	10078	20 Mar 2024	12
M2020	RF Power Sensor	Boonton	55006	9970	17 Mar 2024	12
M2026	RF Power Sensor	Boonton	55006	9911	20 Mar 2024	12
231993	Switching Unit	Mini-Circuits	ZT-400	12211020014	Calibrated before use	-
M1725	Network Analyser	Keysight	E5071c	MY46316169	09 Nov 2023	12

Test Measurement Software/Firmware Used for Transmitter Conducted Tests

Name	Version	Release Date
Phoenix	1.3.5	30 May 2023

Test and Measurement Equipment (continued)**Test Equipment Used for Transmitter Radiated Emissions Tests**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2040	Thermohygrometer	Testo	608-H1	45124934	09 Dec 2023	12
K0001	3m RSE Chamber	Rainford EMC	N/A	N/A	05 Sep 2024	12
M236226	Test Receiver	Rohde & Schwarz	ESW26	103134	21 Apr 2024	12
A3165	Magnetic Loop Antenna	ETS-Lindgren	6502	00224383	13 Apr 2024	12
M2002	Thermohygrometer	Testo	608-H1	45041825	09 Dec 2023	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	08 Nov 2023	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	02 Nov 2023	12
A3167	Pre-Amplifier	Com Power	PAM-103	18020010	02 Nov 2023	12
A2863	Pre-Amplifier	Agilent	8449B	3008A02100	07 Nov 2023	12
A223628	Pre-Amplifier	Atlantic Microwave	A-LNAKX-380116-S5S5	210837001	03 Nov 2023	12
A3265	Pre-Amplifier	Schwarzbeck	BBV 9721	9721-069	31 Oct 2023	12
A490	Antenna	Chase	CBL6111A	1590	06 Oct 2023	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	00653	02 Nov 2023	12
A2890	Antenna	Schwarzbeck	HWRD 750	014	02 Nov 2023	12
A2892	Antenna	Schwarzbeck	BBHA 9170	9170-727	31 Oct 2023	12
A2148	Attenuator	AtlanTecRF	AN18-06	090202-06	06 Oct 2023	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#2	25 Jan 2024	12
A3036	Low Pass Filter	AtlanTecRF	AFL-02000	15062902848	25 Jan 2024	12
A2914	High Pass Filter	AtlanTecRF	AFH-03000	2155	25 Jan 2024	12
A212035	High Pass Filter	Micro-Tronics	HPS20722	001	25 Jan 2024	12

Test Equipment Used for Transmitter Band Edge Radiated Emissions Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2002	Thermohygrometer	Testo	608-H1	45041825	09 Dec 2023	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	08 Nov 2023	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	02 Nov 2023	12
A2863	Pre-Amplifier	Agilent	8449B	3008A02100	07 Nov 2023	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	00653	02 Nov 2023	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#2	25 Jan 2024	12

3 Equipment Under Test (EUT)

3.1 Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number / HVIN:	A2992
PMN:	MacBook Pro
Test Sample Serial Number:	X14637VQLV (<i>Conducted sample #1</i>)
Hardware Version:	REV 1.0
Software Version:	23A32391n
FCC ID:	BCGA2992
ISED Canada Certification Number:	IC: 579C-A2992
Date of Receipt:	04 August 2023

Brand Name:	Apple
Model Name or Number / HVIN:	A2992
PMN:	MacBook Pro
Test Sample Serial Number:	DCXLFPVWQL (<i>Radiated sample #1</i>)
Hardware Version:	REV 1.0
Software Version:	23A32391n
FCC ID:	BCGA2992
ISED Canada Certification Number:	IC: 579C-A2992
Date of Receipt:	10 August 2023

Brand Name:	Apple
Model Name or Number / HVIN:	A2992
PMN:	MacBook Pro
Test Sample Serial Number:	L0942C4MWW (<i>Radiated sample #2</i>)
Hardware Version:	REV 1.0
Software Version:	23A32391v
FCC ID:	BCGA2992
ISED Canada Certification Number:	IC: 579C-A2992
Date of Receipt:	21 August 2023

Identification of Equipment Under Test (EUT) (continued)

Brand Name:	Apple
Model Name or Number / HVIN:	A2992
PMN:	MacBook Pro
Test Sample Serial Number:	QL4WF71R27 (<i>Radiated sample #3</i>)
Hardware Version:	REV 1.0
Software Version:	23A32391n
FCC ID:	BCGA2992
ISED Canada Certification Number:	IC: 579C-A2992
Date of Receipt:	07 July 2023

3.2 Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3 Additional Information Related to Testing

Technology Tested:	<i>Bluetooth</i>		
Type of Unit:	Transceiver		
Channel Spacing:	1 MHz		
Mode:	Basic Rate	Enhanced Data Rate	
Modulation:	GFSK	$\pi/4$ -DQPSK	8DPSK
Packet Type (Maximum Payload):	DH5	2DH5	3DH5
Data Rate (Mbit/s):	1	2	3
Power Supply Requirement(s):	Nominal	12 VDC via 120 VAC 60 Hz AC/DC supply	
Maximum Conducted Output Power:	16.28 dBm		
Transmit Frequency Range:	2400 MHz to 2483.5 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	0	2402
	Middle	39	2441
	Top	78	2480

3.4 Description of Available Antennas

The radio utilizes three integrated antennas, with the following maximum gains:

Antenna Port	Frequency Range (MHz)	Antenna Gain (dBi)
Core 0	2400 to 2480	5.4
Core 1	2400 to 2480	5.4
Dedicated Core	2400 to 2480	6.1

The EUT also supports TxBF with unequal gains and equal transmit powers. Calculations for directional gain were in accordance with KDB 662911 D01 v02r01 Section F)2)d)(i). Directional gain of Core 0 & Core 1 was calculated as:

$N_{SS}=1$, $N_{ANT}=2$, $G_1 = G_{Core 0} = 5.4$ dBi, $G_2 = G_{Core 1} = 5.4$ dBi:

$$\begin{aligned} \text{Directional Gain} &= 10 \log \left[\frac{\left(10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} + \dots + 10^{\frac{G_N}{20}} \right)^2}{N_{ANT}} \right] = 10 \log \left[\frac{\left(10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} \right)^2}{2} \right] \\ &= 10 \log \left[\frac{\left(10^{\frac{5.4}{20}} + 10^{\frac{5.4}{20}} \right)^2}{2} \right] = 8.4 \text{ dBi} \end{aligned}$$

3.5 Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	C02DJ0150H5F

Description:	USB Diagnostic Cable
Brand Name:	Apple
Model Name or Number:	Chimp
Serial Number:	30A99B

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	FVFDH03JQ05G

Description:	USB Diagnostic Cable
Brand Name:	Apple
Model Name or Number:	Chimp
Serial Number:	428CEB

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	C02C30TWMNHR

Description:	USB Diagnostic Cable
Brand Name:	Apple
Model Name or Number:	Chimp
Serial Number:	439430

Description:	AC to DC Power Adaptor
Brand Name:	Apple
Model Name or Number:	A2166
Serial Number:	Not marked or stated

Support Equipment (continued)

Description:	Personal Hands Free
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	Micro SD Card
Brand Name:	SanDisk edge
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	Micro SD Card Adaptor
Brand Name:	SanDisk edge
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	USB-A to USB-C adapters. Quantity 2.
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	HDMI Cable. Quantity 1. Length 3m
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	USB-C Cable. Quantity 1. Length 3m
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	USB-A Cable. Quantity 2. Length 3m
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Support Equipment (continued)

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	H44PM7WY9L

Description:	USB Diagnostic Cable
Brand Name:	Apple
Model Name or Number:	Chimp
Serial Number:	439503

Operating Modes

The EUT was tested in the following operating mode(s):

- Continuously transmitting at maximum power on bottom, middle and top channels in BDR (DH5 packets) or EDR (2DH5 or 3DH5 packets) as required.
- Continuously transmitting at maximum power in hopping mode on all channels in BDR (DH5 packets) or EDR (2DH5 or 3DH5 packets) as required.

Configuration and Peripherals


The EUT was tested in the following configuration(s):

- Controlled in test mode using a set of commands entered into a terminal application on the test laptop supplied by the customer. The commands were used to enable a continuous transmission and to select the test channels as required. The customer supplied a document containing the setup instructions.
- The EUT has a dedicated core (core 2), which operates in SISO mode only, in addition to two cores which operate in both SISO and TxBF modes. Core 0 & Core 1 are identical and have equal gains therefore conducted tests have been performed on the below modes:
 - DH5 / SISO / Core 0
 - 2DH5 / SISO / Core 0
 - 3DH5 / SISO / Core 0
 - DH5 / SISO / Core 2
 - 2DH5 / SISO / Core 2
 - 3DH5 / SISO / Core 2
 - DH5 / Beamforming / Core 0 + Core 1
 - 2DH5 / Beamforming / Core 0 + Core 1
 - 3DH5 / Beamforming / Core 0 + Core 1
- The customer supplied U.FL RF cables with the EUT in order to perform conducted measurements. This measured additional path loss was included in any path loss calculations.
- The EUT was powered from a 120 VAC 60 Hz single phase mains supply.
- Transmitter radiated spurious emissions tests were performed with the EUT transmitting in DH5 Beamforming Core 0 + Core 1 mode, as this mode was found to transmit the highest power.
- Radiated band edge and spurious emissions were performed with the EUT in the normal position of operation. Tests were performed with the EUT connected to its AC to DC power adaptor, HDMI, Micro SD card, PHF and USB adaptors. All ports were terminated with suitable terminations.

Test Setup Diagrams

Conducted Tests:


Test Setup for Transmitter Conducted Tests

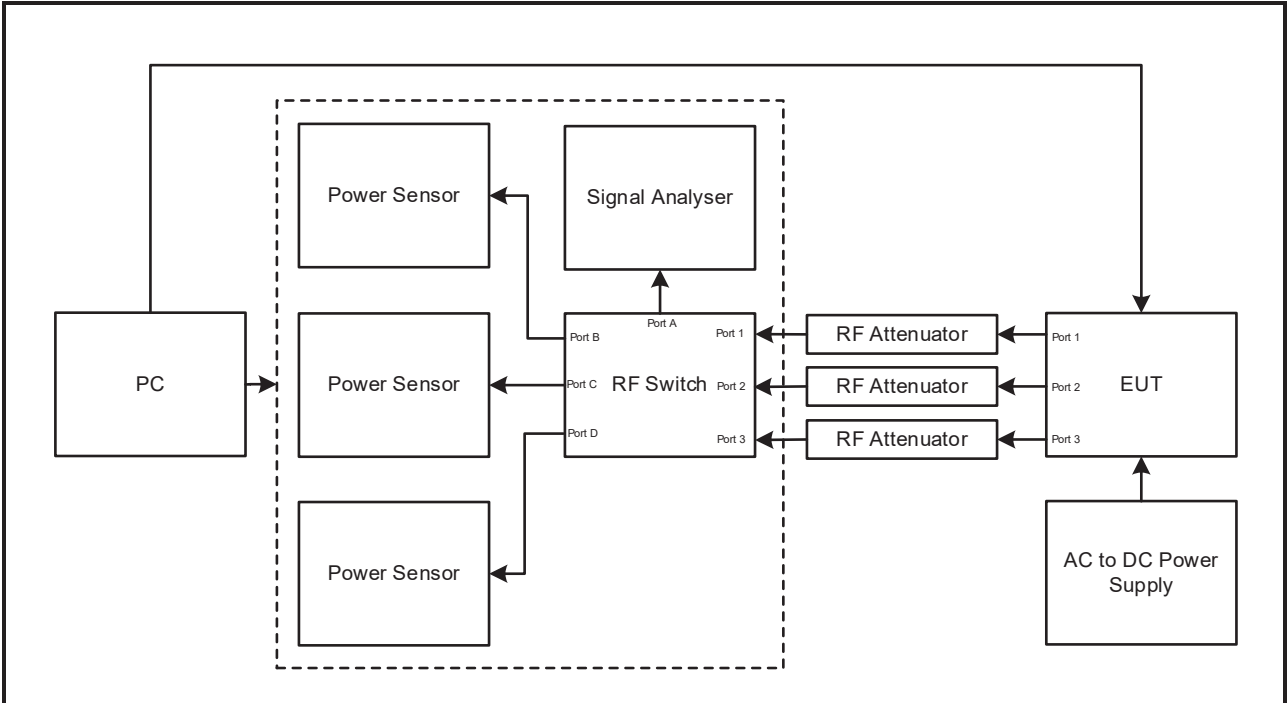

Test Setup Diagrams (continued)


Radiated Tests:

Test Setup for Transmitter Radiated Emissions

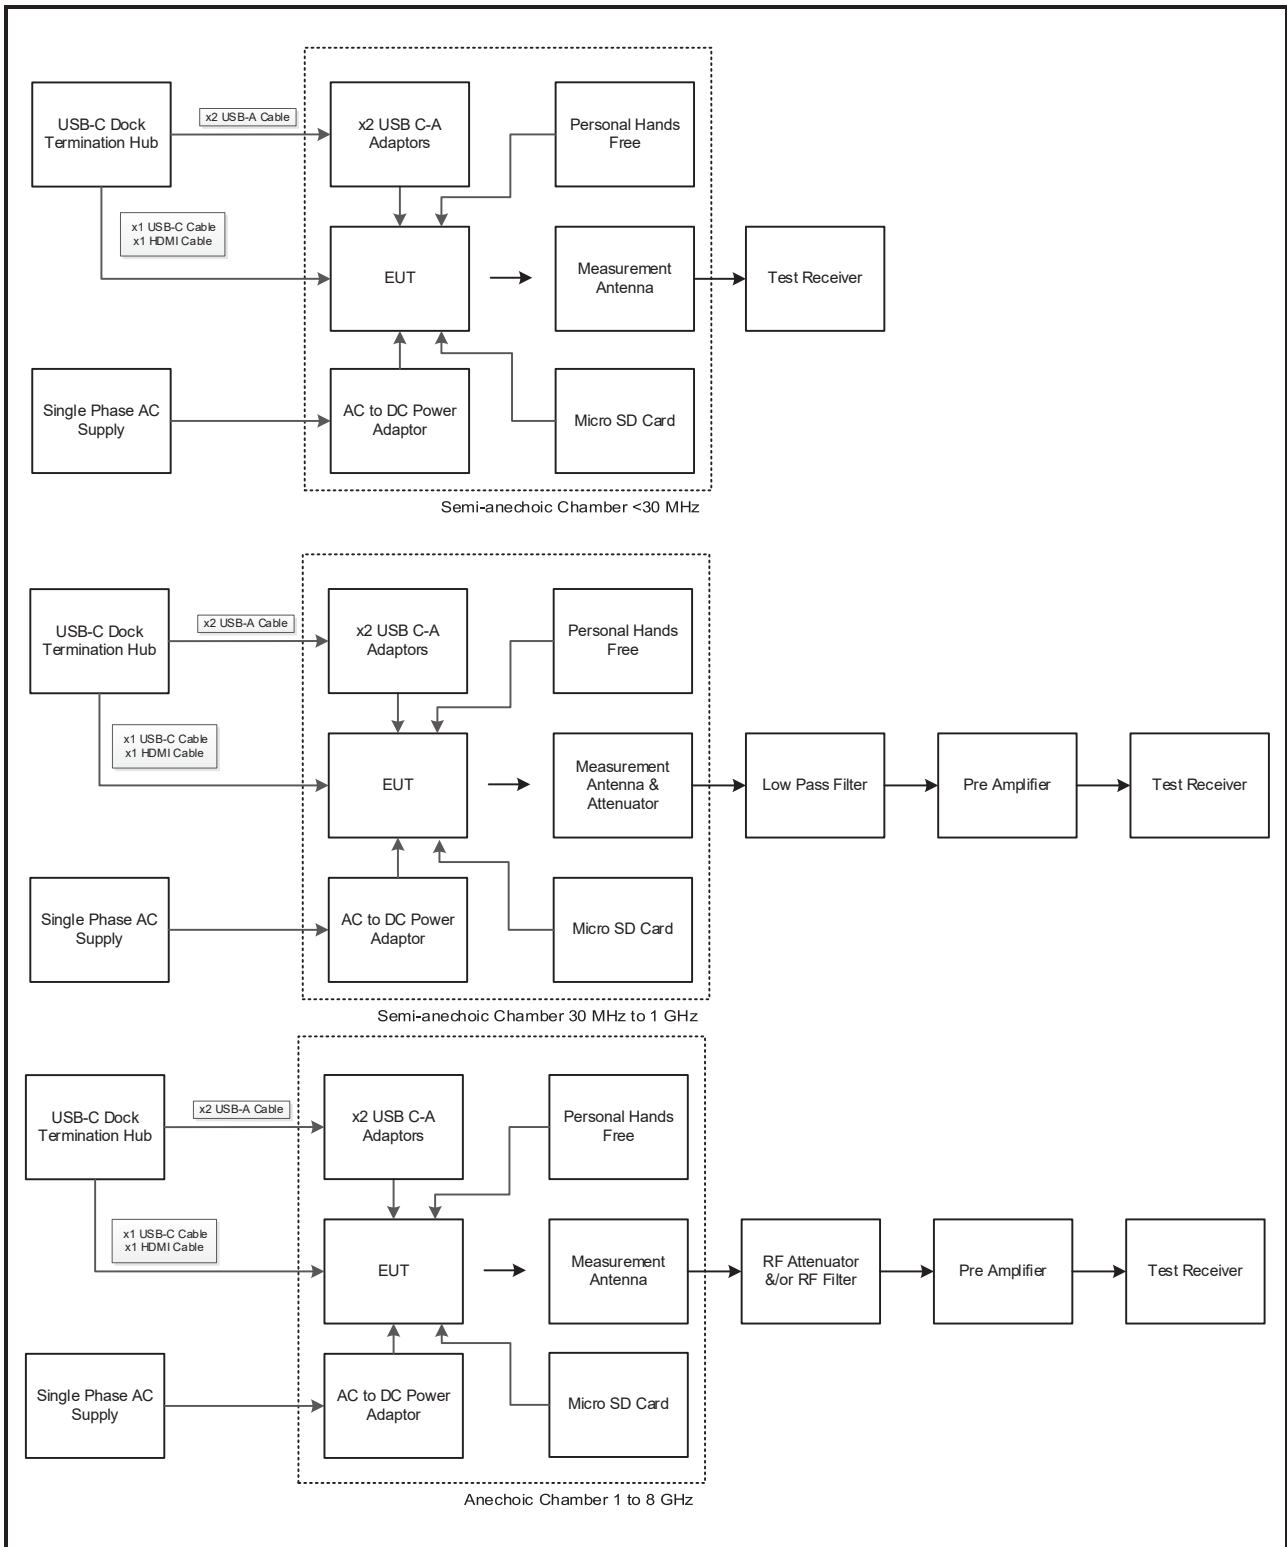

Test Setup Diagrams (continued)

Test Setup for Transmitter Radiated Emissions (continued)

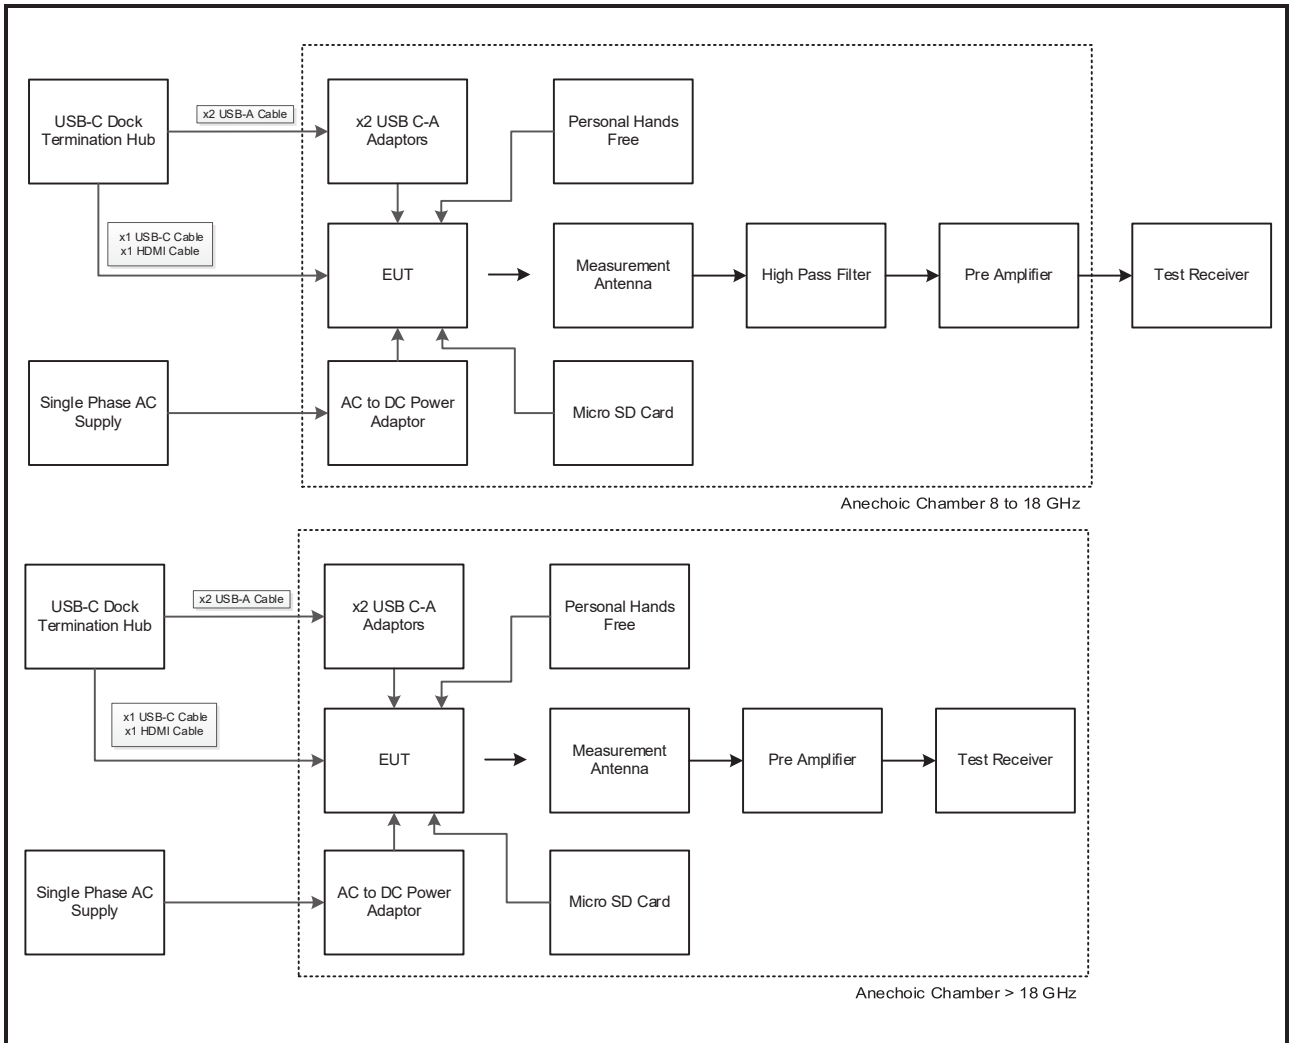

4 Antenna Port Test Results

4.1 Transmitter 99% Emission Bandwidth

Test Summary:

Test Engineers:	Benyamin Kordiboroujeni & Matthew Botfield	Test Dates:	21 August 2023 & 22 August 2023
Test Sample Serial Number:	X14637VQLV		

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	50 to 59

Note(s):

1. The 99% emission bandwidth was measured using the test system signal analyser occupied bandwidth function. The resolution bandwidth was set in the range of 1% to 5% of the occupied bandwidth and the video bandwidth set to 3 times the resolution bandwidth. The span was set to capture all products of the modulation process including emission skirts.
2. Example plots of each modulation on middle channel, for one antenna configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.


Transmitter 99% Emission Bandwidth (continued)

Results:

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	SISO	Mode:	BDR
Test Port:	1 (Core 0)	Rate/Modulation:	DH5 (GFSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	0.852	-	-	-	-
2441 (CH39)	0.856	-	-	-	-
2480 (CH78)	0.855	-	-	-	-

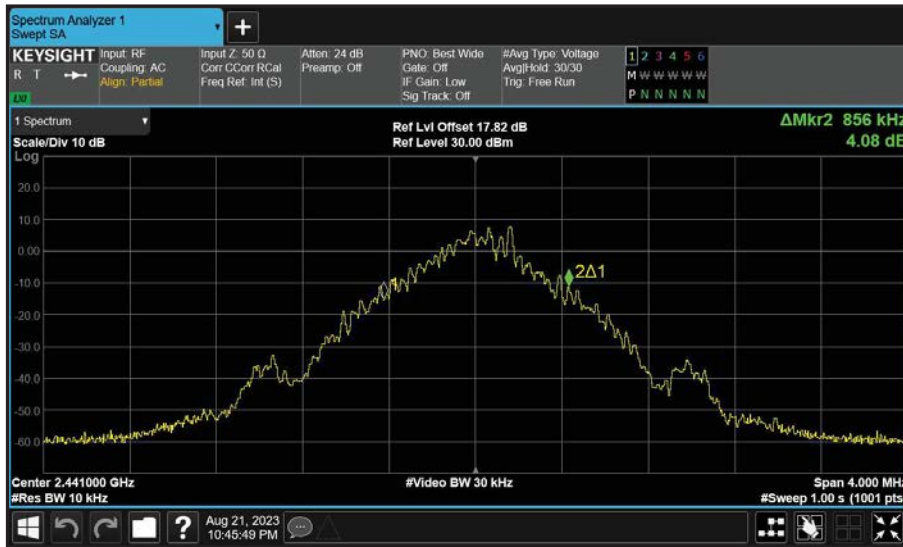

Channel 39

Transmitter 99% Emission Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	1 (Core 0)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	1.184	-	-	-	-
2441 (CH39)	1.184	-	-	-	-
2480 (CH78)	1.188	-	-	-	-



Channel 39

Transmitter 99% Emission Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	1 (Core 0)	Rate/Modulation:	3-DH5 (8-DPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	1.188	-	-	-	-
2441 (CH39)	1.188	-	-	-	-
2480 (CH78)	1.188	-	-	-	-



Channel 39

Transmitter 99% Emission Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	SISO	Mode:	BDR
Test Port:	3 (Core 2)	Rate/Modulation:	DH5 (GFSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	-	-	0.858	-	-
2441 (CH39)	-	-	0.860	-	-
2480 (CH78)	-	-	0.858	-	-

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	3 (Core 2)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	-	-	1.188	-	-
2441 (CH39)	-	-	1.184	-	-
2480 (CH78)	-	-	1.188	-	-

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	3 (Core 2)	Rate/Modulation:	3-DH5 (8-DPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	-	-	1.192	-	-
2441 (CH39)	-	-	1.188	-	-
2480 (CH78)	-	-	1.192	-	-

Transmitter 99% Emission Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	Beamforming	Mode:	BDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	DH5 (GFSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	0.852	0.861	-	-	-
2441 (CH39)	0.852	0.852	-	-	-
2480 (CH78)	0.855	0.861	-	-	-

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	Beamforming	Mode:	EDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	1.188	1.188	-	-	-
2441 (CH39)	1.184	1.184	-	-	-
2480 (CH78)	1.188	1.188	-	-	-

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	RSS-Gen 6.7	Test Method:	ANSI C63.10 6.9.3

Antenna Configuration:	Beamforming	Mode:	EDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	3-DH5 (8-DPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	1.192	1.192	-	-	-
2441 (CH39)	1.188	1.188	-	-	-
2480 (CH78)	1.192	1.196	-	-	-

4.2 Transmitter 20 dB Bandwidth

Test Summary:

Test Engineers:	Benyamin Kordiboroujeni & Matthew Botfield	Test Dates:	21 August 2023 & 22 August 2023
Test Sample Serial Number:	X14637VQLV		

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	50 to 59

Note(s):

1. The test system signal analyser resolution bandwidth was set in the range of 1% to 5% of the OBW and video bandwidth is 3 times of RBW. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to capture all products of the modulation process including emission skirts. Normal and delta markers were placed 20 dB down from the peak of the carrier.
2. Example plots of each modulation on middle channel, for one antenna configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.

Transmitter 20 dB Bandwidth (continued)

Results:

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	SISO	Mode:	BDR
Test Port:	1 (Core 0)	Rate/Modulation:	DH5 (GFSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	0.858	-	-	-	-
2441 (CH39)	0.855	-	-	-	-
2480 (CH78)	0.855	-	-	-	-



Channel 39

Transmitter 20 dB Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	1 (Core 0)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	1.325		-	-	-
2441 (CH39)	1.325		-	-	-
2480 (CH78)	1.325		-	-	-




Channel 39

Transmitter 20 dB Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	1 (Core 0)	Rate/Modulation:	3-DH5 (8-DPSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	1.260	-	-	-	-
2441 (CH39)	1.265	-	-	-	-
2480 (CH78)	1.260	-	-	-	-

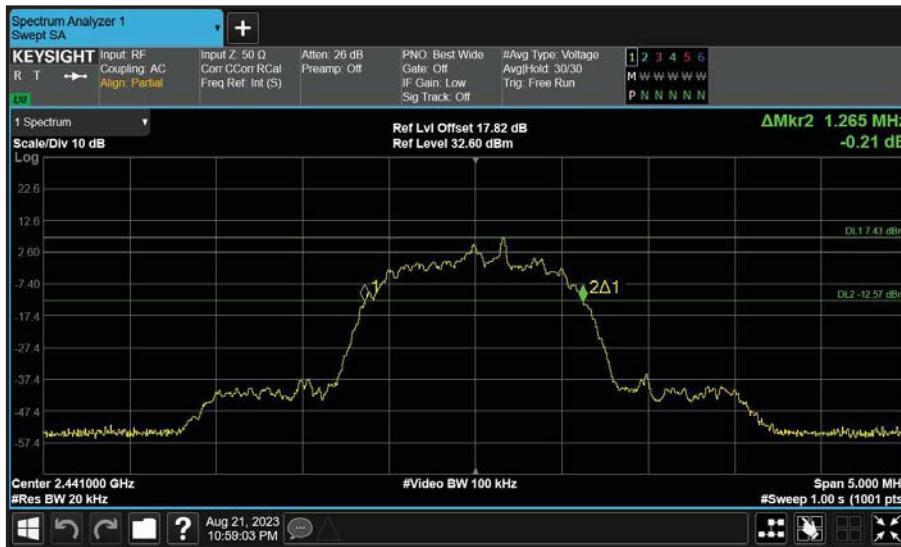

Channel 39

Transmitter 20 dB Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	SISO	Mode:	BDR
Test Port:	3 (Core 2)	Rate/Modulation:	DH5 (GFSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	-	-	0.855	-	-
2441 (CH39)	-	-	0.855	-	-
2480 (CH78)	-	-	0.855	-	-

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	3 (Core 2)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	-	-	1.325	-	-
2441 (CH39)	-	-	1.330	-	-
2480 (CH78)	-	-	1.325	-	-

Transmitter 20 dB Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	3 (Core 2)	Rate/Modulation:	3-DH5 (8-DPSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	-	-	1.260	-	-
2441 (CH39)	-	-	1.265	-	-
2480 (CH78)	-	-	1.260	-	-

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	Beamforming	Mode:	BDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	DH5 (GFSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	0.858	0.855	-	-	-
2441 (CH39)	0.855	0.855	-	-	-
2480 (CH78)	0.855	0.855	-	-	-

Transmitter 20 dB Bandwidth (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	Beamforming	Mode:	EDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	1.325	1.325	-	-	-
2441 (CH39)	1.330	1.330	-	-	-
2480 (CH78)	1.325	1.325	-	-	-

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (a) / RSS-Gen 6.7	Test Method:	ANSI C63.10 Section 6.9.2

Antenna Configuration:	Beamforming	Mode:	EDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	3-DH5 (8-DPSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2402 (CH0)	1.260	1.260	-	-	-
2441 (CH39)	1.265	1.265	-	-	-
2480 (CH78)	1.260	1.260	-	-	-

4.3 Transmitter Carrier Frequency Separation

Test Summary:

Test Engineers:	Benyamin Kordiboroujeni & Matthew Botfield	Test Dates:	21 August 2023 & 22 August 2023
Test Sample Serial Number:	X14637VQLV		

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	50 to 59

Note(s):

1. The 20 dB bandwidth measured for the middle channel operating at 2441 MHz was used to calculate the limit.
2. The signal analyser resolution bandwidth was set to 30 kHz and video bandwidth 100 kHz for DH5. The resolution bandwidth was set to 51 kHz and video bandwidth 200 kHz for EDR. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 3 MHz for DH5 and 4 MHz for EDR. A marker was placed at the centre of one signal and then a delta marker was placed in the same place on the second signal.
3. Example plots of each modulation, for one antenna configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.

Transmitter Carrier Frequency Separation (continued)

Results:

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (b)	Test Method:	ANSI C63.10 Section 7.8.2

Antenna Configuration:	SISO	Mode:	BDR - EDR
Test Port:	1 (Core 0)	Rate/Modulation:	-

Packet Type / Modulation	Hopping Frequency (MHz)		FHS (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)	Margin (MHz)
	F1	F2				
DH5 (GFSK)	2441.019	2442.018	0.999	0.855	0.570	0.429
2-DH5 ($\pi/4$ DQPSK)	2441.001	2442.001	1.000	1.325	0.883	0.117
3-DH5 (8-DPSK)	2441.009	2442.008	0.999	1.265	0.843	0.156



DH5



2-DH5



3-DH5

Transmitter Carrier Frequency Separation (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (b)	Test Method:	ANSI C63.10 Section 7.8.2

Antenna Configuration:	SISO	Mode:	BDR - EDR
Test Port:	3 (Core 2)	Rate/Modulation:	-

Packet Type / Modulation	Hopping Frequency (MHz)		F _{HS} (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)	Margin (MHz)
	F1	F2				
DH5 (GFSK)	2441.019	2442.019	1.000	0.855	0.570	0.430
2-DH5 ($\pi/4$ DQPSK)	2441.000	2442.001	1.001	1.330	0.887	0.114
3-DH5 (8-DPSK)	2441.008	2442.008	1.000	1.265	0.843	0.157

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (a)(1) RSS-247 5.1 (b)	Test Method:	ANSI C63.10 Section 7.8.2

Antenna Configuration:	Beamforming	Mode:	BDR - EDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	-

Packet Type / Modulation	Hopping Frequency (MHz)		F _{HS} (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)	Margin (MHz)
	F1	F2				
DH5 (GFSK)	2441.020	2442.018	0.998	0.855	0.570	0.428
2-DH5 ($\pi/4$ DQPSK)	2441.001	2442.001	1.000	1.330	0.887	0.113
3-DH5 (8-DPSK)	2441.008	2442.008	1.000	1.265	0.843	0.157

4.4 Transmitter Number of Hopping Frequencies and Average Time of Occupancy

Test Summary:

Test Engineers:	Benyamin Kordiboroujeni & Matthew Botfield	Test Dates:	21 August 2023 & 22 August 2023
Test Sample Serial Number:	X14637VQLV		

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	50 to 59

Note(s):

1. Tests were performed to identify the average time of occupancy in number of channels (79) x 0.4 seconds. The calculated period is 31.6 seconds.
2. The test system signal analyser was set up for the Number of Hopping Frequencies measurement as follows: the resolution bandwidth was set to 100 kHz and video bandwidth of 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 83.5 MHz.
3. The test system signal analyser was set up for the Average Time of Occupancy measurement as follows: the resolution bandwidth was set to 100 kHz and video bandwidth of 300 kHz. A peak detector was used and sweep time was set to 31.6 seconds. The EUT was set to transmit in a hopping mode with zero span. The total number of hopping frequencies were recorded in the table below.
4. Example plots of each modulation, for one antenna configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.

Transmitter Number of Hopping Frequencies and Average Time of Occupancy (continued)

Results:


Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247(a)(1)(iii) RSS-247 5.1 (d)	Test Method:	ANSI C63.10 7.8.3 ANSI C63.10 7.8.4

Antenna Configuration:	SISO	Mode:	BDR
Test Port:	1 (Core 0)	Rate/Modulation:	DH5 (GFSK)


Burst Tx	Stability: < ±2%	Duty Cycle (%): 77.01	Period (ms): 3.750	Width (ms): 2.888
-----------------	------------------	-----------------------	--------------------	-------------------

Number of Hopping Frequencies	Limit
79	≥ 15

Hopping Frequency Investigated (MHz)	Emission Width (ms)	Number of Hops	Average Time of Occupancy (ms)	Limit (ms)	Margin (ms)
2402	2.888	101	291.7	≤ 400.0	108.3

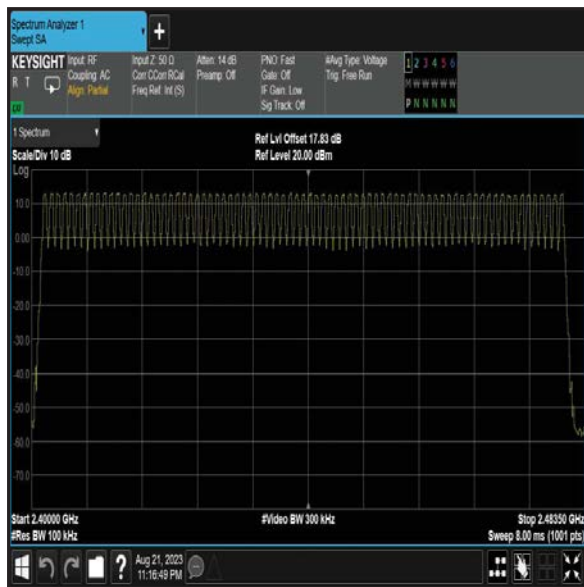

Number of Hopping Frequencies

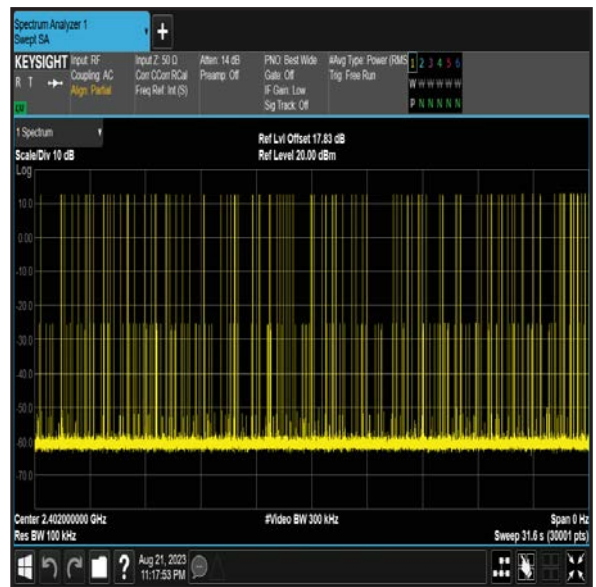

Number of Hopping Frequencies in 31.6 s

Transmitter Number of Hopping Frequencies and Average Time of Occupancy (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247(a)(1)(iii) RSS-247 5.1 (d)	Test Method:	ANSI C63.10 7.8.3 ANSI C63.10 7.8.4

Antenna Configuration:	SISO	Mode:	BDR
Test Port:	3 (Core 2)	Rate/Modulation:	DH5 (GFSK)

Burst Tx	Stability: < ±2%	Duty Cycle (%): 77.00	Period (ms): 3.750	Width (ms): 2.888
-----------------	------------------	-----------------------	--------------------	-------------------

Number of Hopping Frequencies	Limit
79	≥ 15

Hopping Frequency Investigated (MHz)	Emission Width (ms)	Number of Hops	Average Time of Occupancy (ms)	Limit (ms)	Margin (ms)
2402	2.888	104	300.3	≤ 400.0	99.7

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247(a)(1)(iii) RSS-247 5.1 (d)	Test Method:	ANSI C63.10 7.8.3 ANSI C63.10 7.8.4

Antenna Configuration:	Beamforming	Mode:	BDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	DH5 (GFSK)

Burst Tx	Stability: < ±2%	Duty Cycle (%): 76.99	Period (ms): 3.750	Width (ms): 2.888
-----------------	------------------	-----------------------	--------------------	-------------------

Number of Hopping Frequencies	Limit
79	≥ 15

Hopping Frequency Investigated (MHz)	Emission Width (ms)	Number of Hops	Average Time of Occupancy (ms)	Limit (ms)	Margin (ms)
2402	2.888	95	274.3	≤ 400.0	125.7

4.5 Transmitter Maximum Peak Output Power

Test Summary:

Test Engineers:	Benyamin Kordiboroujeni & Matthew Botfield	Test Dates:	21 August 2023 & 22 August 2023
Test Sample Serial Number:	X14637VQLV		

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	50 to 59

Note(s):

1. Tests were performed using a peak power sensor.
2. For beamforming modes, conducted power was measured on Core 0 & Core 1 and then combined using the measure-and-sum technique stated in FCC KDB 662911 D01 Section E)1). For EIRP, the directional antenna gain was added to the conducted output power.
3. For Core 2 and beamforming modes, the limit for conducted output power has been reduced by the same amount in dB that the directional gain of the antenna exceeds 6 dBi, in accordance with 15.247(b)(4).

Results:

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	SISO	Mode:	BDR
Test Port:	1 (Core 0)	Rate/Modulation:	DH5 (GFSK)

Burst Tx	Stability: < ±2%	Duty Cycle (%): 77.01	Period (ms): 3.750	Width (ms): 2.888
-----------------	------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	13.86	-	-	-	-	30.00	16.14	5.40	19.26	36.00	16.74
2441 (CH39)	13.85	-	-	-	-	30.00	16.15	5.40	19.25	36.00	16.75
2480 (CH78)	13.67	-	-	-	-	30.00	16.33	5.40	19.07	36.00	16.93

Transmitter Maximum Peak Output Power (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	1 (Core 0)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Burst Tx	Stability: < $\pm 2\%$	Duty Cycle (%): 77.07	Period (ms): 3.750	Width (ms): 2.890
-----------------	------------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	11.81	-	-	-	-	30.00	18.19	5.40	17.21	36.00	18.79
2441 (CH39)	11.89	-	-	-	-	30.00	18.11	5.40	17.29	36.00	18.71
2480 (CH78)	11.73	-	-	-	-	30.00	18.27	5.40	17.13	36.00	18.87

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	1 (Core 0)	Rate/Modulation:	3-DH5 (8-DPSK)

Burst Tx	Stability: < $\pm 2\%$	Duty Cycle (%): 77.13	Period (ms): 3.750	Width (ms): 2.892
-----------------	------------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	12.21	-	-	-	-	30.00	17.79	5.40	17.61	36.00	18.39
2441 (CH39)	12.32	-	-	-	-	30.00	17.68	5.40	17.72	36.00	18.28
2480 (CH78)	12.15	-	-	-	-	30.00	17.85	5.40	17.55	36.00	18.45

Transmitter Maximum Peak Output Power (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	SISO	Mode:	BDR
Test Port:	3 (Core 2)	Rate/Modulation:	DH5 (GFSK)

Burst Tx	Stability: < ±2%	Duty Cycle (%): 77.01	Period (ms): 3.750	Width (ms): 2.888
-----------------	------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
	1	2	3	4	Σ			
2402 (CH0)	-	-	13.49	-	-	6.10	29.90	16.41
2441 (CH39)	-	-	13.51	-	-	6.10	29.90	16.39
2480 (CH78)	-	-	13.45	-	-	6.10	29.90	16.45

FCC Maximum Conducted (peak) Output Power

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	-	-	13.49	-	-	30.00	16.51	6.10	19.59	36.00	16.41
2441 (CH39)	-	-	13.51	-	-	30.00	16.49	6.10	19.61	36.00	16.39
2480 (CH78)	-	-	13.45	-	-	30.00	16.55	6.10	19.55	36.00	16.45

ISED Maximum Conducted (peak) Output Power

Transmitter Maximum Peak Output Power (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	3 (Core 2)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Burst Tx	Stability: < $\pm 2\%$	Duty Cycle (%): 77.07	Period (ms): 3.750	Width (ms): 2.890
-----------------	------------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
	1	2	3	4	Σ			
2402 (CH0)	-	-	11.96	-	-	6.10	29.90	17.94
2441 (CH39)	-	-	11.56	-	-	6.10	29.90	18.34
2480 (CH78)	-	-	11.93	-	-	6.10	29.90	17.97

FCC Maximum Conducted (peak) Output Power

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	-	-	11.96	-	-	30.00	18.04	6.10	18.06	36.00	17.94
2441 (CH39)	-	-	11.56	-	-	30.00	18.44	6.10	17.66	36.00	18.34
2480 (CH78)	-	-	11.93	-	-	30.00	18.07	6.10	18.03	36.00	17.97

ISED Maximum Conducted (peak) Output Power

Transmitter Maximum Peak Output Power (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	SISO	Mode:	EDR
Test Port:	3 (Core 2)	Rate/Modulation:	3-DH5 (8-DPSK)

Burst Tx	Stability: < ±2%	Duty Cycle (%): 77.12	Period (ms): 3.750	Width (ms): 2.892
-----------------	------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
	1	2	3	4	Σ			
2402 (CH0)	-	-	12.34	-	-	6.10	29.90	17.56
2441 (CH39)	-	-	12.03	-	-	6.10	29.90	17.87
2480 (CH78)	-	-	12.31	-	-	6.10	29.90	17.59

FCC Maximum Conducted (peak) Output Power

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	-	-	12.34	-	-	30.00	17.66	6.10	18.44	36.00	17.56
2441 (CH39)	-	-	12.03	-	-	30.00	17.97	6.10	18.13	36.00	17.87
2480 (CH78)	-	-	12.31	-	-	30.00	17.69	6.10	18.41	36.00	17.59

ISED Maximum Conducted (peak) Output Power

Transmitter Maximum Peak Output Power (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	Beamforming	Mode:	BDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	DH5 (GFSK)

Burst Tx	Stability: < ±2%	Duty Cycle (%): 77.00	Period (ms): 3.750	Width (ms): 2.888
-----------------	------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
	1	2	3	4	Σ			
2402 (CH0)	13.34	13.21	-	-	16.25	8.41	27.59	11.34
2441 (CH39)	13.31	13.26	-	-	16.28	8.41	27.59	11.31
2480 (CH78)	13.28	13.23	-	-	16.21	8.41	27.59	11.38

FCC Maximum Conducted (peak) Output Power

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	13.34	13.21	-	-	16.25	30.00	13.75	8.41	24.66	36.00	11.34
2441 (CH39)	13.31	13.26	-	-	16.28	30.00	13.72	8.41	24.69	36.00	11.31
2480 (CH78)	13.28	13.23	-	-	16.21	30.00	13.79	8.41	24.62	36.00	11.38

ISED Maximum Conducted (peak) Output Power

Transmitter Maximum Peak Output Power (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	Beamforming	Mode:	EDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	2-DH5 ($\pi/4$ DQPSK)

Burst Tx	Stability: < $\pm 2\%$	Duty Cycle (%): 77.07	Period (ms): 3.750	Width (ms): 2.890
-----------------	------------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
	1	2	3	4	Σ			
2402 (CH0)	11.79	11.70	-	-	14.72	8.41	27.59	12.87
2441 (CH39)	11.49	11.69	-	-	14.57	8.41	27.59	13.02
2480 (CH78)	11.61	11.69	-	-	14.65	8.41	27.59	12.94

FCC Maximum Conducted (peak) Output Power

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	11.79	11.70	-	-	14.72	30.00	15.28	8.41	23.13	36.00	12.87
2441 (CH39)	11.49	11.69	-	-	14.57	30.00	15.43	8.41	22.98	36.00	13.02
2480 (CH78)	11.61	11.69	-	-	14.65	30.00	15.35	8.41	23.06	36.00	12.94

ISED Maximum Conducted (peak) Output Power

Transmitter Maximum Peak Output Power (continued)

Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause:	FCC 15.247 (b)(1) RSS-247 5.4 (b)	Test Method:	ANSI C63.10 7.8.5

Antenna Configuration:	Beamforming	Mode:	EDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	3-DH5 (8-DPSK)

Burst Tx	Stability: < ±2%	Duty Cycle (%): 77.12	Period (ms): 3.750	Width (ms): 2.892
-----------------	------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
	1	2	3	4	Σ			
2402 (CH0)	12.28	12.04	-	-	15.14	8.41	27.59	12.45
2441 (CH39)	11.83	12.00	-	-	14.89	8.41	27.59	12.70
2480 (CH78)	12.07	12.01	-	-	15.02	8.41	27.59	12.57

FCC Maximum Conducted (peak) Output Power

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2402 (CH0)	12.28	12.04	-	-	15.14	30.00	14.86	8.41	23.55	36.00	12.45
2441 (CH39)	11.83	12.00	-	-	14.89	30.00	15.11	8.41	23.30	36.00	12.70
2480 (CH78)	12.07	12.01	-	-	15.02	30.00	14.98	8.41	23.43	36.00	12.57

ISED Maximum Conducted (peak) Output Power

5 Radiated Test Results

5.1 Transmitter Radiated Emissions <1 GHz

Test Summary:

Test Engineers:	Nick Steele & Lenny Hantz	Test Dates:	22 August 2023 & 06 September 2023
Test Sample Serial Numbers:	DCXLFPVWQL & L0942C4MWW		

FCC Reference:	Parts 15.247(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 / RSS-247 5.5
Test Method Used:	ANSI C63.10 Sections 6.3, 6.4 and 6.5
Frequency Range	9 kHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	25 to 26
Relative Humidity (%):	48 to 49




Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the middle channel only.
3. All emissions shown on the pre-scans were investigated and found to be ambient, or > 20 dB below the appropriate limit or below the noise floor of the measurement system. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
4. Measurements below 30 MHz were performed in a semi-anechoic chamber (Asset Number K0001) at 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. The limit was extrapolated to 3 metres in accordance with ANSI C63.10 clause 6.4.3 using the method described in clause 6.4.4.2. ANSI C63.10 clause 5.2 states an alternative test site that can demonstrate equivalence to an open area test site may be used for measurements below 30 MHz. Therefore, measurements were performed in a semi-anechoic chamber. The correlation data between semi-anechoic chamber and an open field test site is available upon request.
5. Measurements from 30 MHz to 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
6. Pre-scans were performed and markers placed on the highest measured levels. The test receiver was configured as follows: For 9 kHz to 150 kHz, the resolution bandwidth was set to 300 Hz and video bandwidth 1 kHz. A peak detector was used and trace mode was Max Hold. For 150 kHz to 30 MHz, the resolution bandwidth was set to 10 kHz and video bandwidth 30 kHz, trace mode was Max Hold. For 30 MHz to 1 GHz, the resolution bandwidth was set to 120 kHz and video bandwidth 500 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.

Transmitter Radiated Emissions (continued)

Results: Peak / Middle Channel / DH5 / Beamforming / Core 0 + Core 1

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
983.283	Vertical	33.0	54.0	21.0	Complied

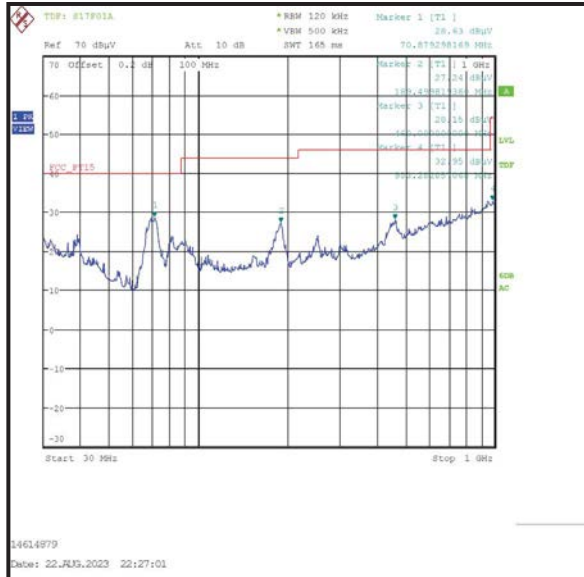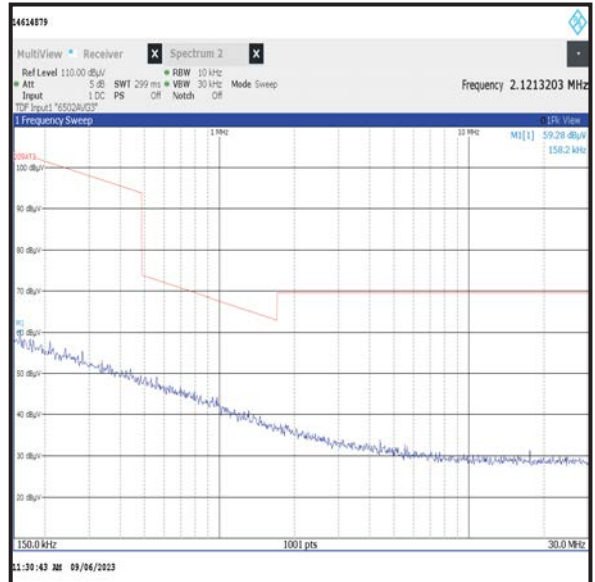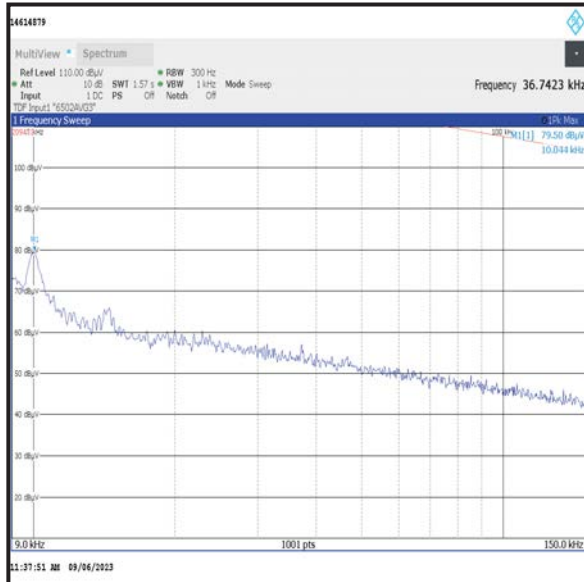

5.2 Transmitter Radiated Emissions >1 GHz

Test Summary:

Test Engineer:	Nick Steele	Test Dates:	14 August 2023 & 18 August 2023
Test Sample Serial Number:	DCXLFPVWQL		

FCC Reference:	Parts 15.247(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 / RSS-247 5.5
Test Method Used:	ANSI C63.10 Sections 6.3 and 6.6
Frequency Range	1 GHz to 25 GHz

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	47 to 49

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak and average noise floor readings of the measuring receiver were recorded as shown in the tables below.
3. The emission shown on the 1 GHz to 3 GHz plot at approximately 2441 MHz is the EUT fundamental.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT.
5. Pre-scans were performed and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. The sweep time was set to auto. Peak and average measurements were performed with their own appropriate detectors during the pre-scan measurements.





Results: Peak / Middle Channel / DH5 / Beamforming / Core 0 + Core 1

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2888.500	Vertical	54.9	74.0	19.1	Complied

Results: Average / Middle Channel / DH5 / Beamforming / Core 0 + Core 1

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2899.500	Vertical	47.9	54.0	6.1	Complied

Transmitter Radiated Emissions (continued)

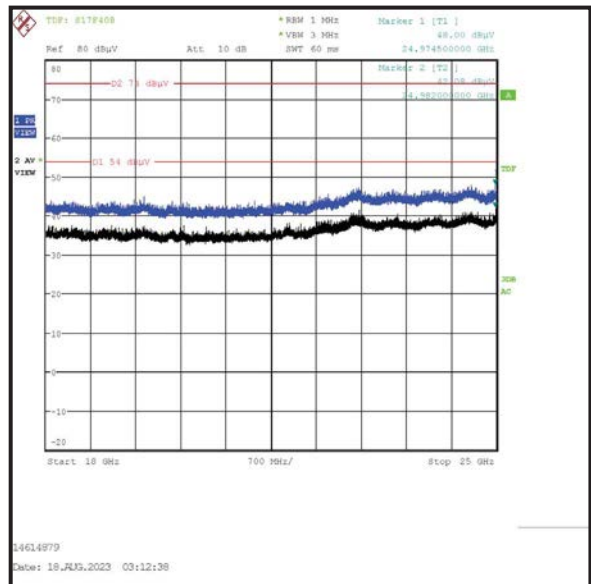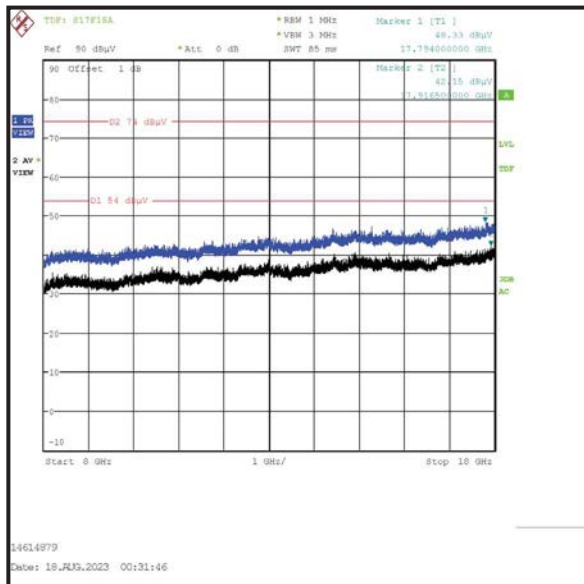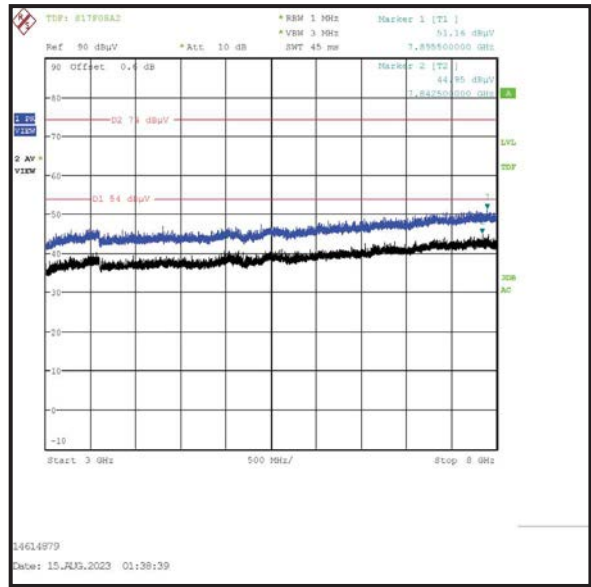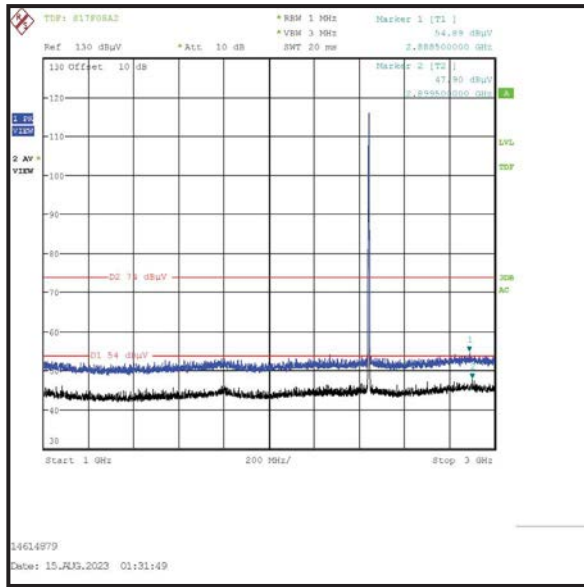

5.3 Transmitter Band Edge Radiated Emissions

Test Summary:

Test Engineers:	Andrew Harding & John Ferdinand	Test Dates:	11 July 2023 to 18 July 2023
Test Sample Serial Number:	QL4WF71R27		

FCC Reference:	Parts 15.247(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 / RSS-247 5.5
Test Method Used:	ANSI C63.10 Section 6.10 & FCC KDB 558074 Section 9) b)

Environmental Conditions:

Temperature (°C):	23 to 25
Relative Humidity (%):	43 to 46

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The lower band edge is adjacent to a non-restricted band. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent band (where a higher level emission was present). Marker frequencies and levels were recorded.
3. The upper band edge is adjacent to a restricted band. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. Peak and average measurements were performed with their respective detectors, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent band (where a higher level emission was present). Marker frequencies and levels were recorded.
4. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with their respective detectors. Markers were placed on the highest point on each trace.
5. * -20 dBc limit.
6. ** For the upper band edge the average measurements: The corrected average level has been obtained by subtracting the calculated duty cycle correction factor from the measured peak level for any restricted band emissions related to the fundamental. See Appendix 1 for further information.

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / DH5 / SISO / Core 0**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2397.676	Vertical	48.9	93.3*	44.4	Complied
2400.0	Vertical	47.9	93.3*	45.4	Complied
2483.5	Vertical	53.9	74.0	20.1	Complied
2496.641	Vertical	54.2	74.0	19.8	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	34.9**	54.0	19.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2371.282	Vertical	53.9	74.0	20.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2373.718	Vertical	48.4	54.0	5.6	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / DH5 / SISO / Core 0

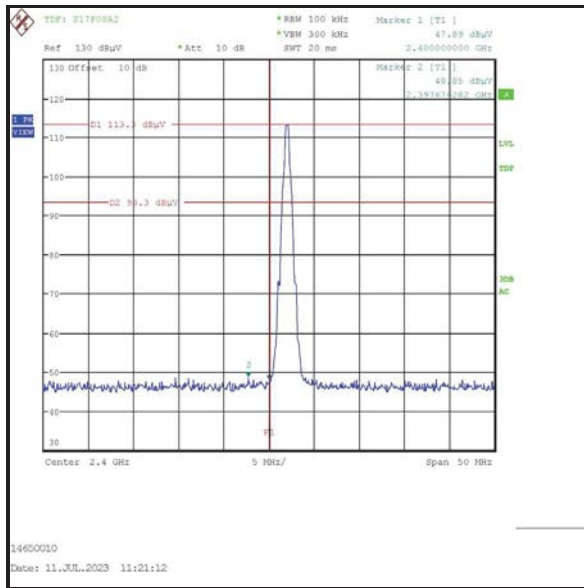

Lower Band Edge

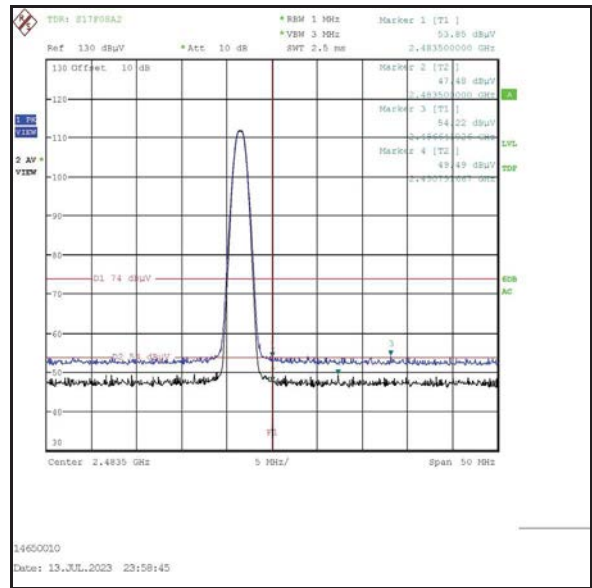

Upper Band Edge

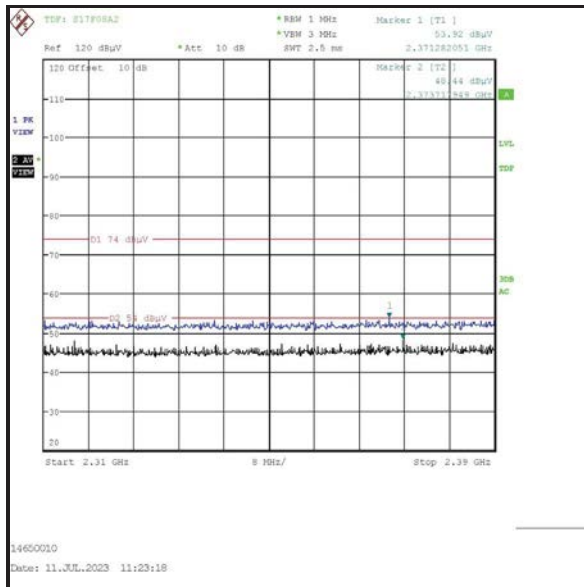

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / DH5 / SISO / Core 0**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	46.4	93.7*	47.3	Complied
2483.5	Vertical	52.6	74.0	21.4	Complied
2496.321	Vertical	53.6	74.0	20.4	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	33.6**	54.0	20.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2361.538	Vertical	53.9	74.0	20.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2369.487	Vertical	47.8	54.0	6.2	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / DH5 / SISO / Core 0

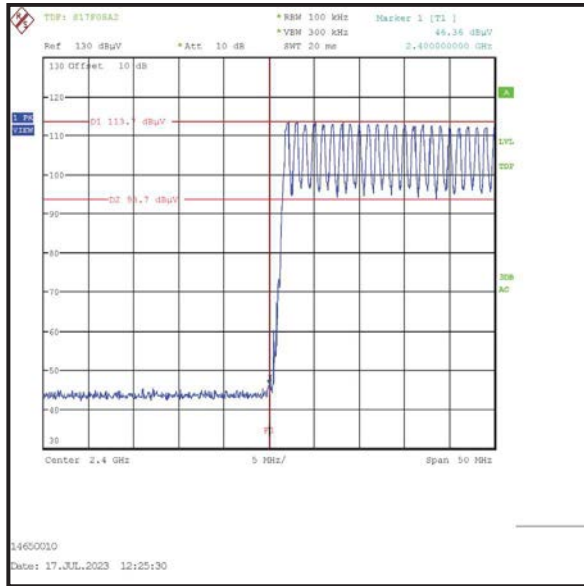

Lower Band Edge

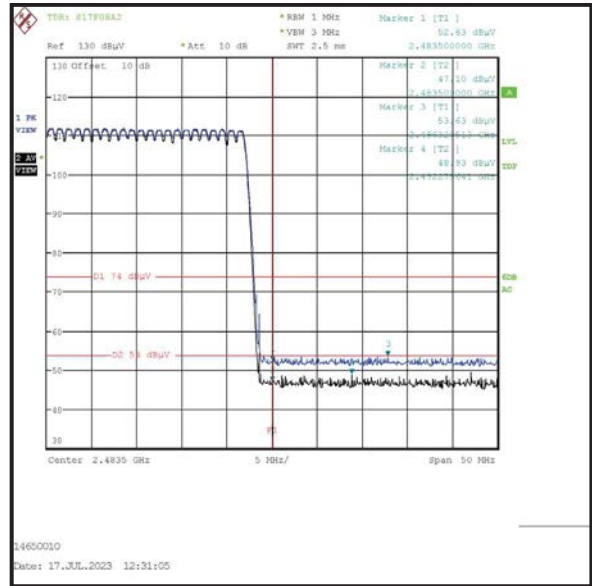

Upper Band Edge

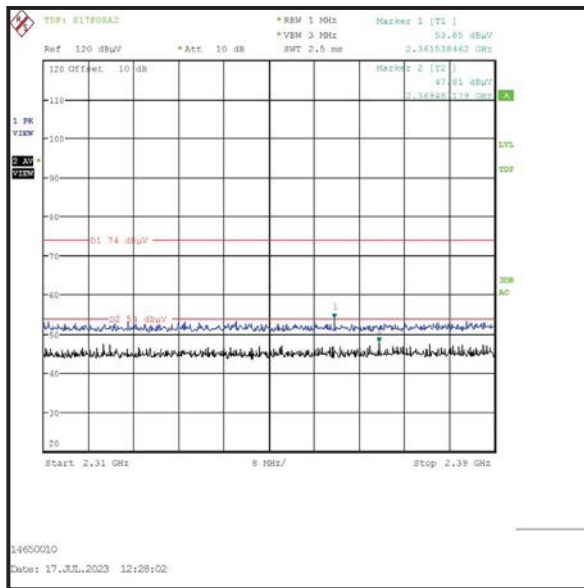

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 2DH5 / SISO / Core 0**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	49.0	89.8*	40.8	Complied
2483.5	Vertical	54.0	74.0	20.0	Complied
2487.106	Vertical	55.0	74.0	19.0	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	35.0**	54.0	19.0	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2334.231	Vertical	54.8	74.0	19.2	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2312.308	Vertical	49.2	54.0	4.8	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / 2DH5 / SISO / Core 0

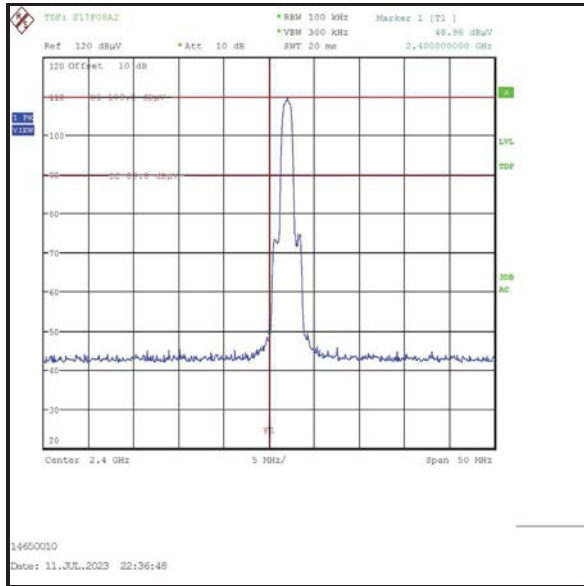

Lower Band Edge

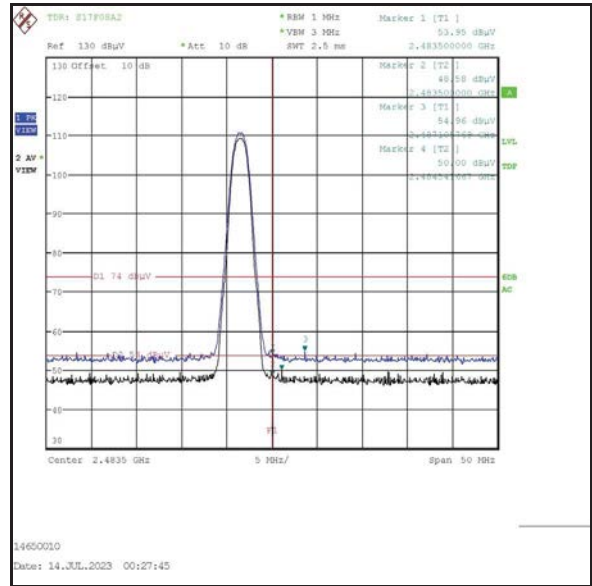

Upper Band Edge

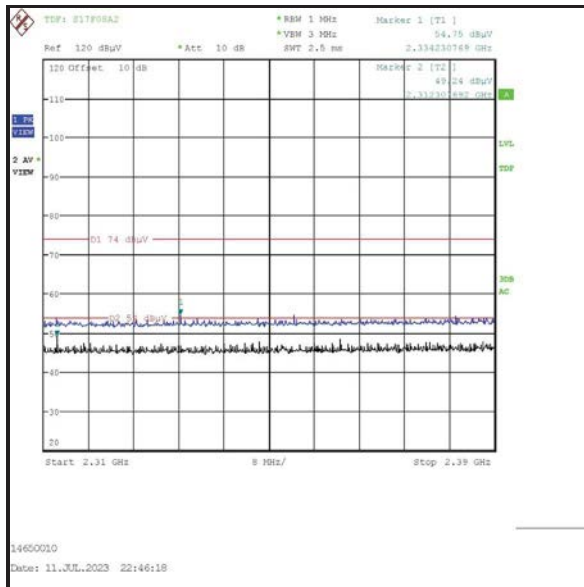

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 2DH5 / SISO / Core 0**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.550	Vertical	46.5	91.4*	44.9	Complied
2400.0	Vertical	46.0	91.4*	45.4	Complied
2483.5	Vertical	53.2	74.0	20.8	Complied
2488.150	Vertical	54.6	74.0	19.4	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	34.2**	54.0	19.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2377.840	Vertical	55.6	74.0	18.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2331.600	Vertical	46.8	54.0	7.2	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / 2DH5 / SISO / Core 0

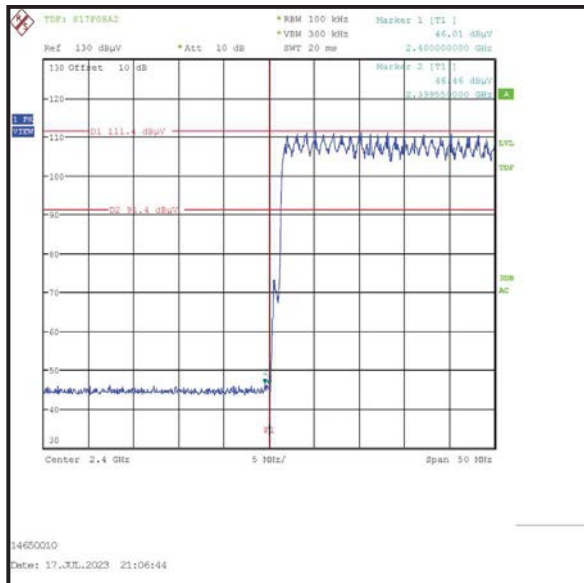

Lower Band Edge

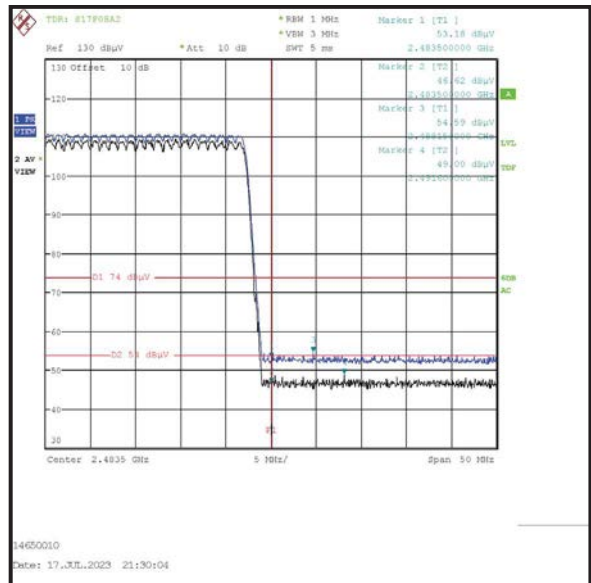

Upper Band Edge

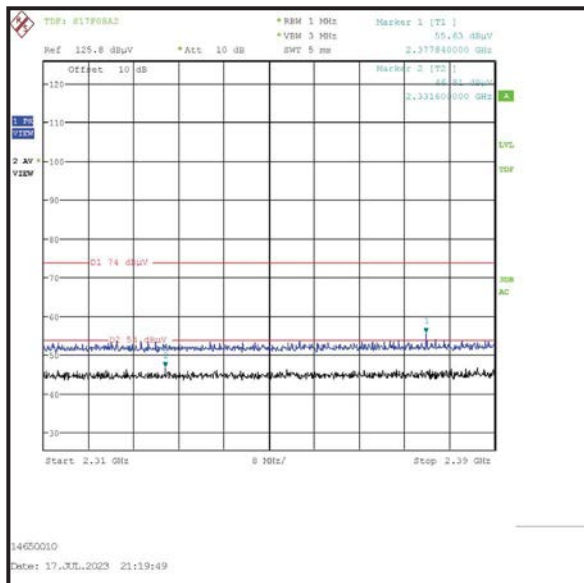

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 3DH5 / SISO / Core 0**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.840	Vertical	48.5	89.5*	41.0	Complied
2400.0	Vertical	47.5	89.5*	42.0	Complied
2483.5	Vertical	53.7	74.0	20.3	Complied
2488.548	Vertical	54.4	74.0	19.6	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	34.7**	54.0	19.3	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2387.821	Vertical	54.9	74.0	19.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2329.615	Vertical	48.2	54.0	5.8	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / 3DH5 / SISO / Core 0

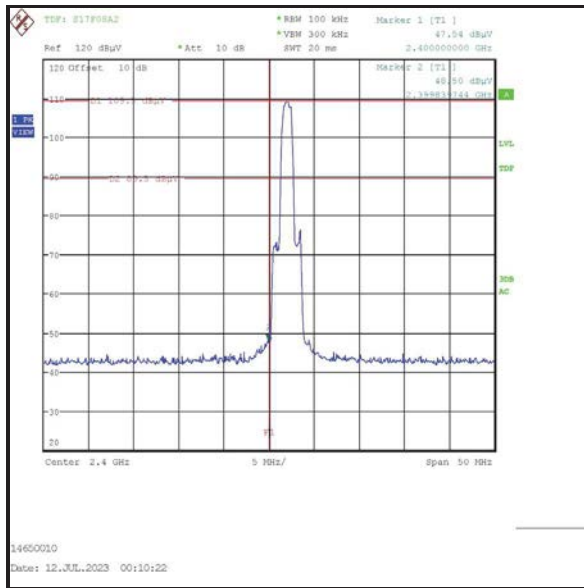

Lower Band Edge

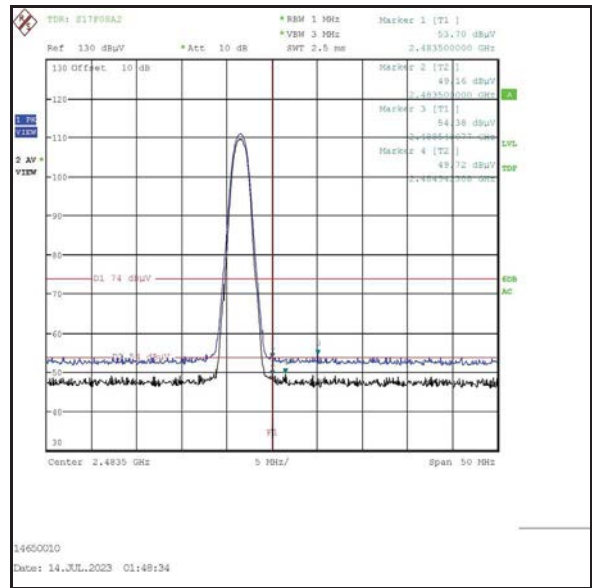

Upper Band Edge

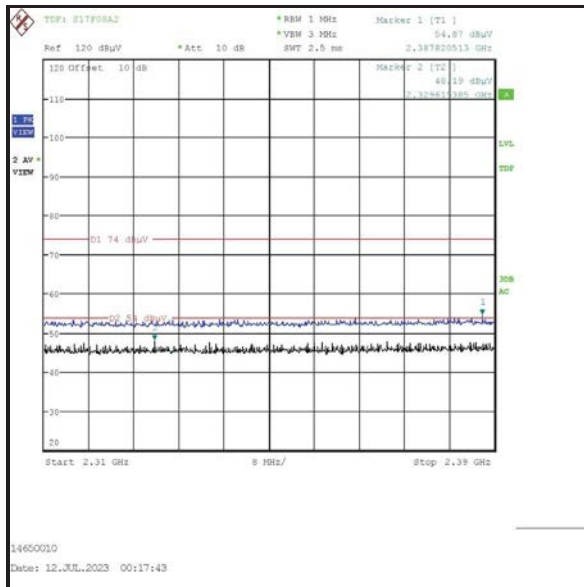

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 3DH5 / SISO / Core 0**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.500	Vertical	47.9	91.3*	43.4	Complied
2400.0	Vertical	45.8	91.3*	45.5	Complied
2483.5	Vertical	52.3	74.0	21.7	Complied
2498.600	Vertical	54.2	74.0	19.8	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	33.3**	54.0	20.7	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2368.400	Vertical	54.4	74.0	19.6	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2362.960	Vertical	47.4	54.0	6.6	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / 3DH5 / SISO / Core 0

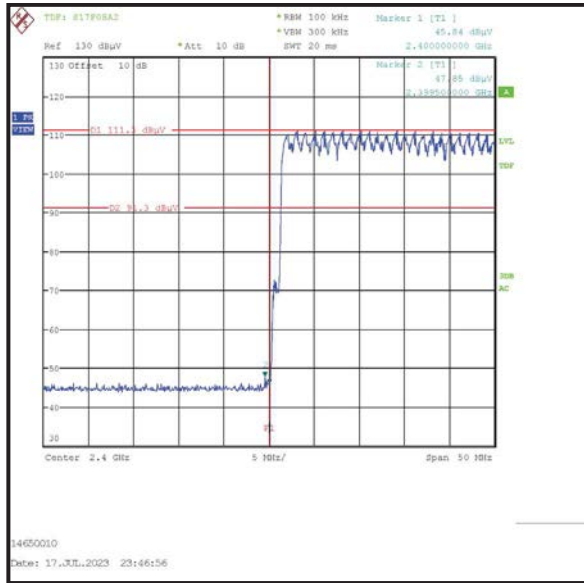

Lower Band Edge

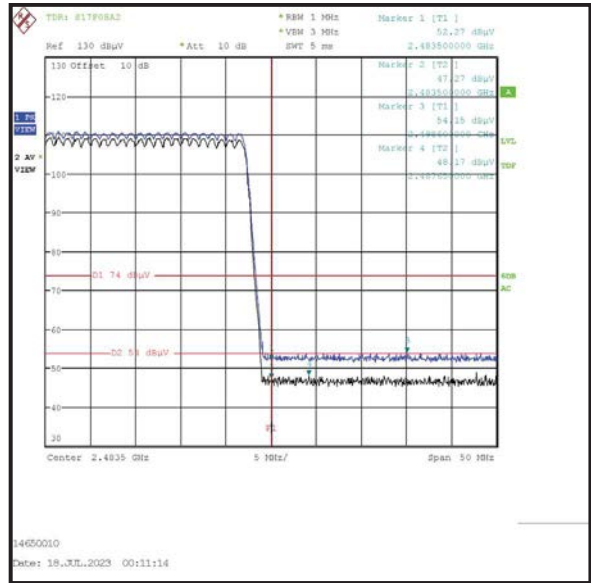

Upper Band Edge

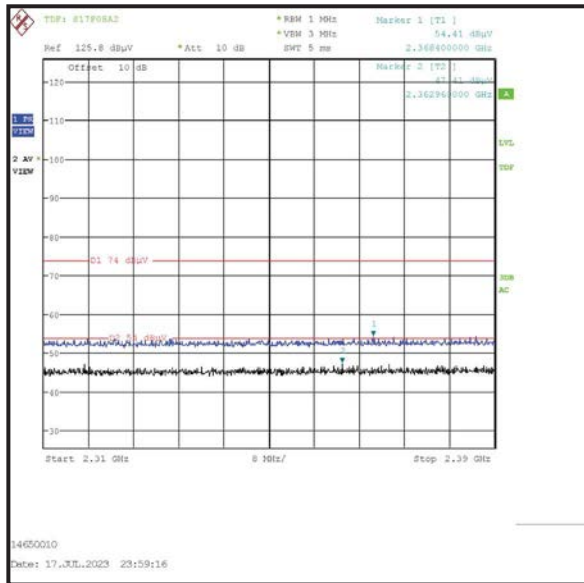

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / DH5 / SISO / Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.199	Vertical	45.3	87.1*	41.8	Complied
2400.0	Vertical	44.5	87.1*	42.6	Complied
2483.5	Vertical	54.0	74.0	20.0	Complied
2492.955	Vertical	54.8	74.0	19.2	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	35.0**	54.0	19.0	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2330.513	Vertical	54.6	74.0	19.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2372.308	Vertical	48.5	54.0	5.5	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / DH5 / SISO / Core 1

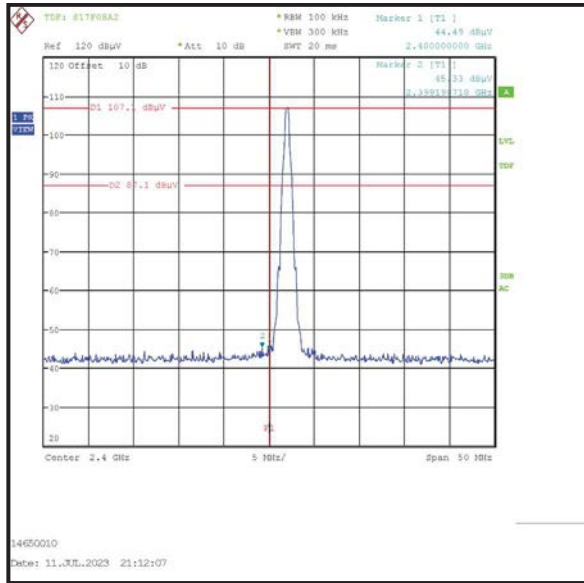

Lower Band Edge

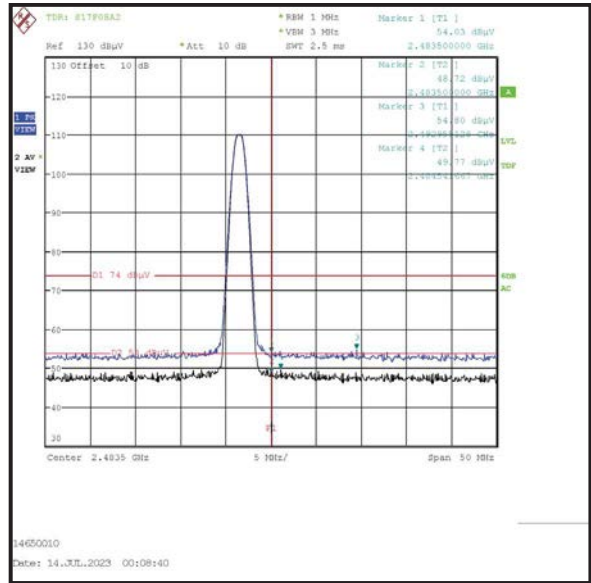

Upper Band Edge

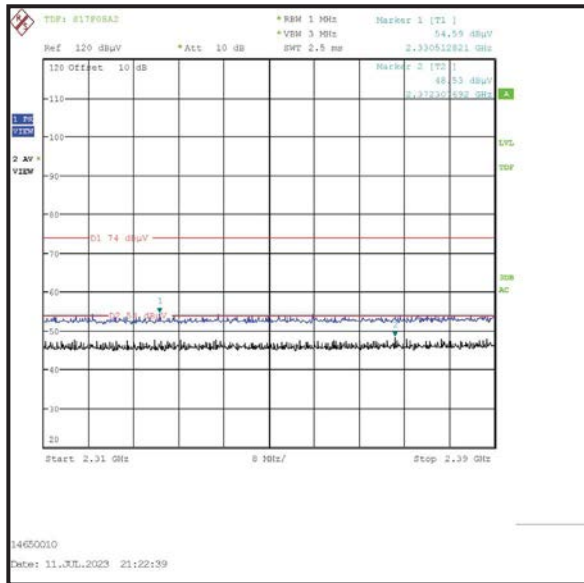

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / DH5 / SISO / Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2391.700	Vertical	44.5	90.2*	45.7	Complied
2400.0	Vertical	46.2	90.2*	44.0	Complied
2483.5	Vertical	52.5	74.0	21.5	Complied
2492.715	Vertical	54.5	74.0	19.5	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	33.5**	54.0	20.5	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2372.179	Vertical	53.9	74.0	20.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2372.949	Vertical	47.7	54.0	6.3	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / DH5 / SISO / Core 1

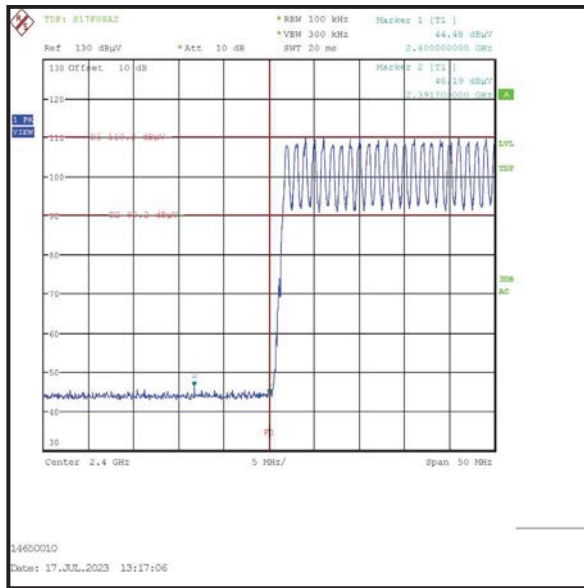

Lower Band Edge

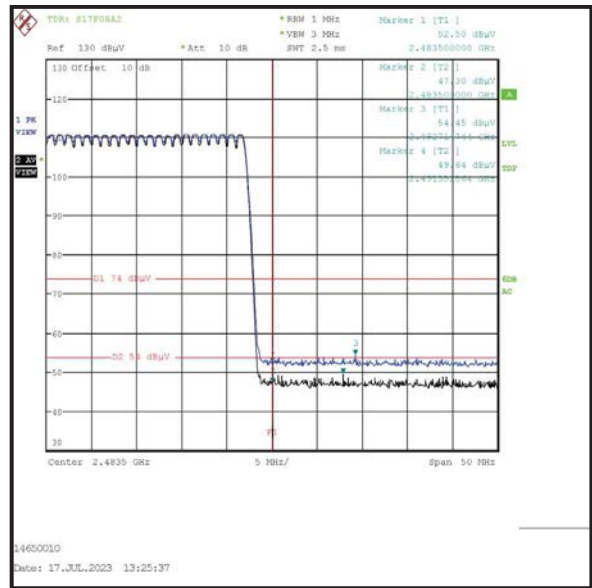

Upper Band Edge

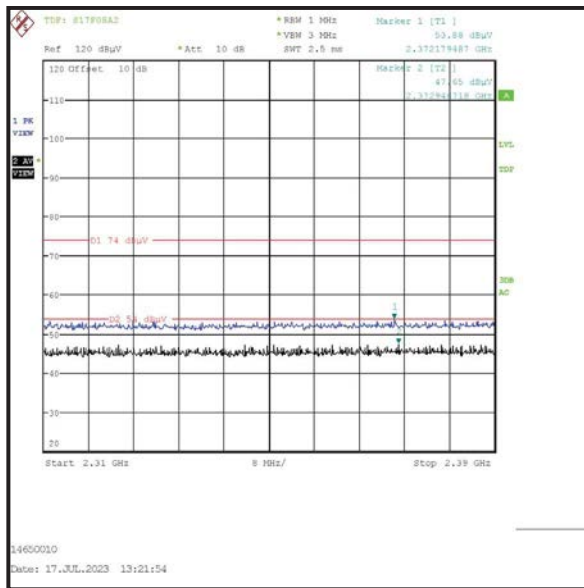

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 2DH5 / SISO / Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	51.3	87.6*	36.3	Complied
2483.5	Vertical	54.3	74.0	19.7	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	35.3**	54.0	18.7	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2346.154	Vertical	54.6	74.0	19.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2331.923	Vertical	48.6	54.0	5.4	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / 2DH5 / SISO / Core 1

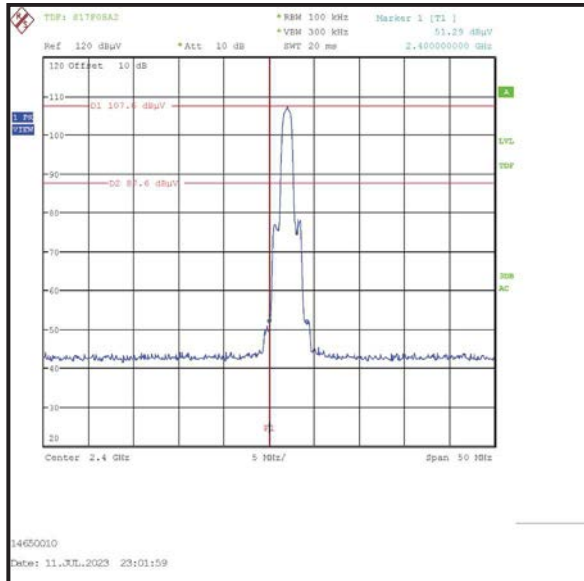

Lower Band Edge

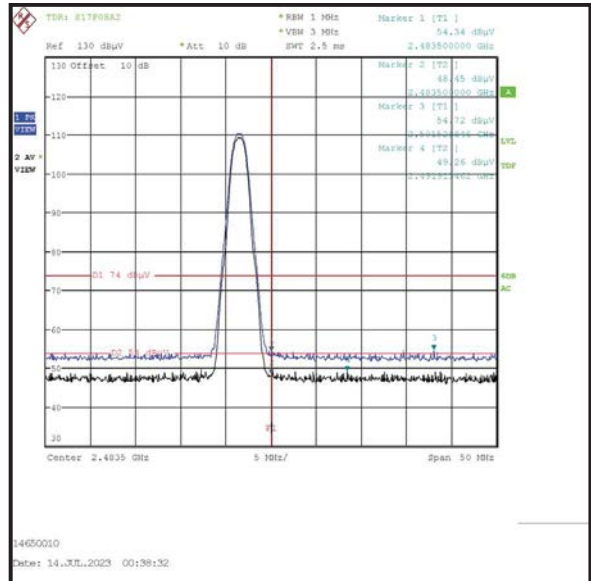

Upper Band Edge

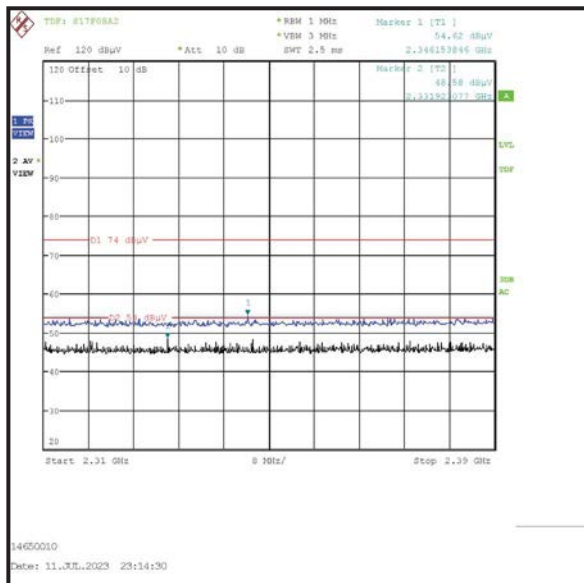

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 2DH5 / SISO / Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.900	Vertical	50.0	89.0*	39.0	Complied
2400.0	Vertical	48.8	89.0*	40.2	Complied
2483.5	Vertical	53.2	74.0	20.8	Complied
2490.750	Vertical	54.2	74.0	19.8	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	34.2**	54.0	19.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2334.080	Vertical	54.7	74.0	19.3	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2373.600	Vertical	47.6	54.0	6.4	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / 2DH5 / SISO / Core 1

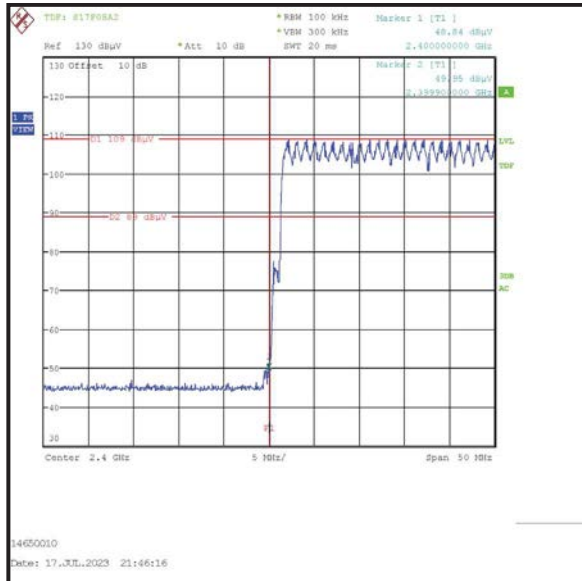

Lower Band Edge

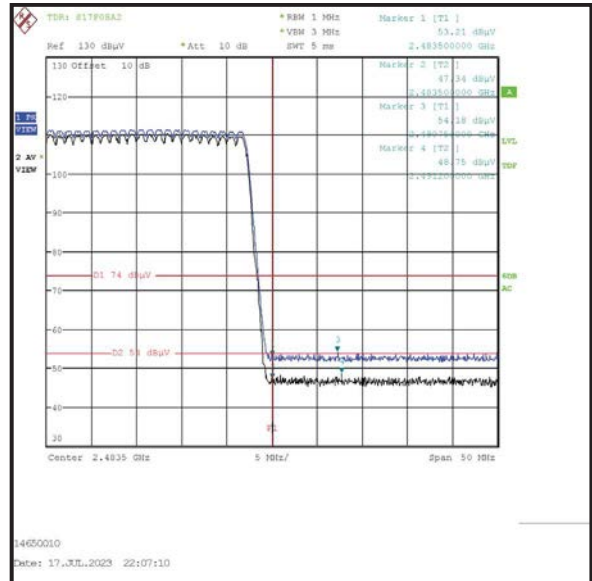

Upper Band Edge

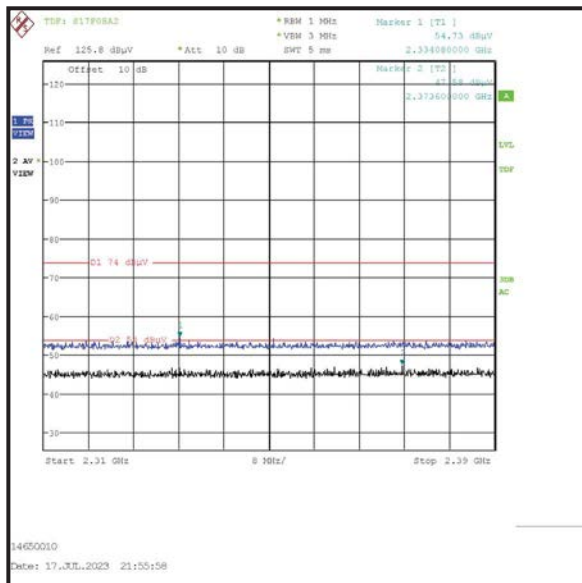

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 3DH5 / SISO / Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	51.2	87.2*	36.0	Complied
2483.5	Vertical	54.2	74.0	19.8	Complied
2483.660	Vertical	54.4	74.0	19.6	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	35.2**	54.0	18.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2337.949	Vertical	54.2	74.0	19.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2335.641	Vertical	48.2	54.0	5.8	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / 3DH5 / SISO / Core 1

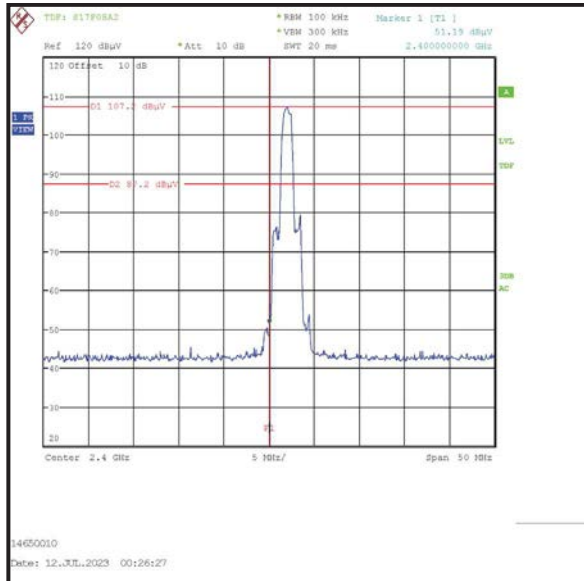

Lower Band Edge

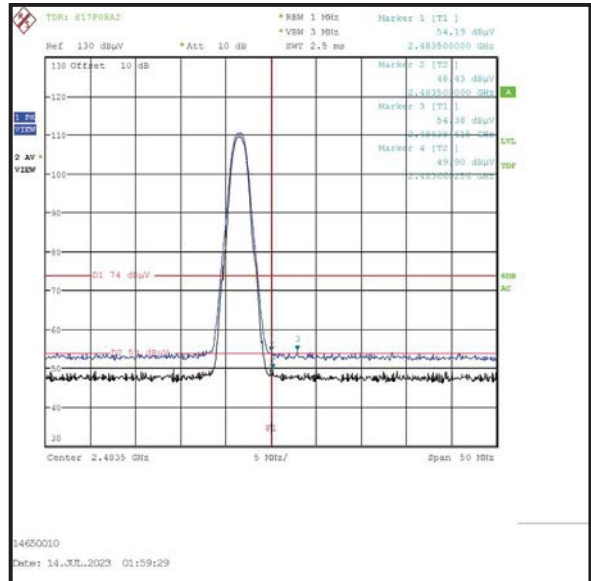

Upper Band Edge

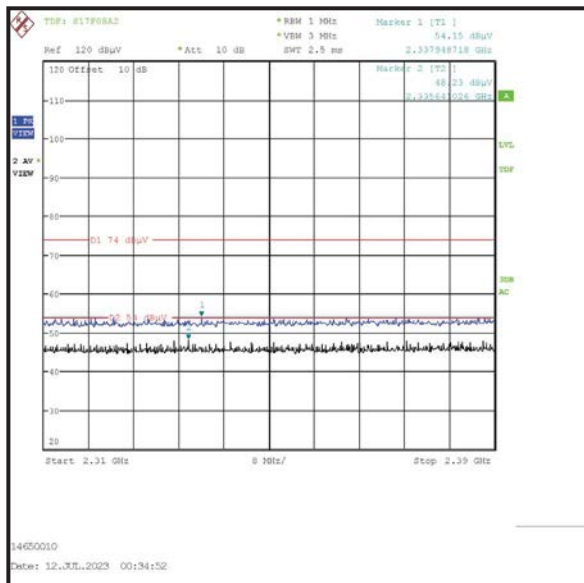

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 3DH5 / SISO / Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.500	Vertical	51.8	88.8*	37.0	Complied
2400.0	Vertical	48.0	88.8*	40.8	Complied
2483.5	Vertical	52.2	74.0	21.8	Complied
2490.650	Vertical	54.0	74.0	20.0	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	33.2**	54.0	20.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2373.440	Vertical	54.8	74.0	19.2	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2375.760	Vertical	47.0	54.0	7.0	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / 3DH5 / SISO / Core 1

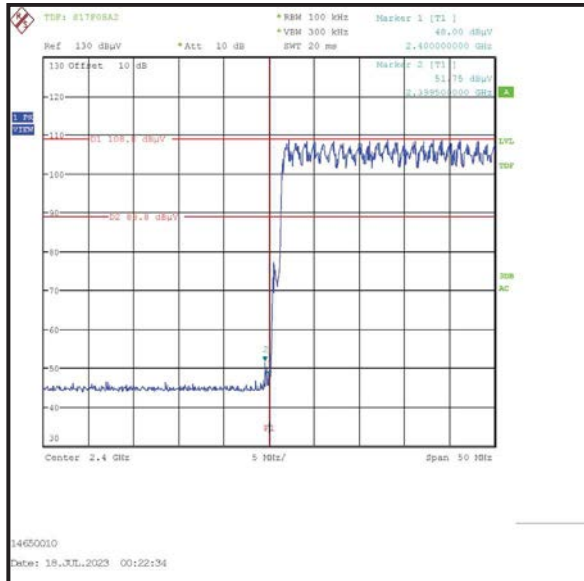

Lower Band Edge

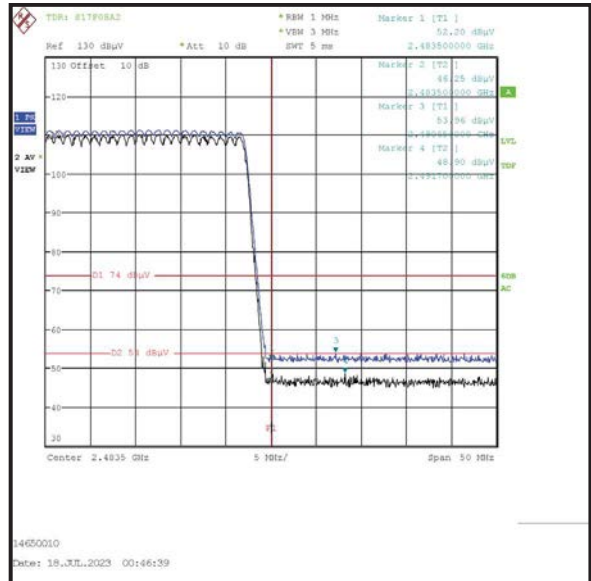

Upper Band Edge

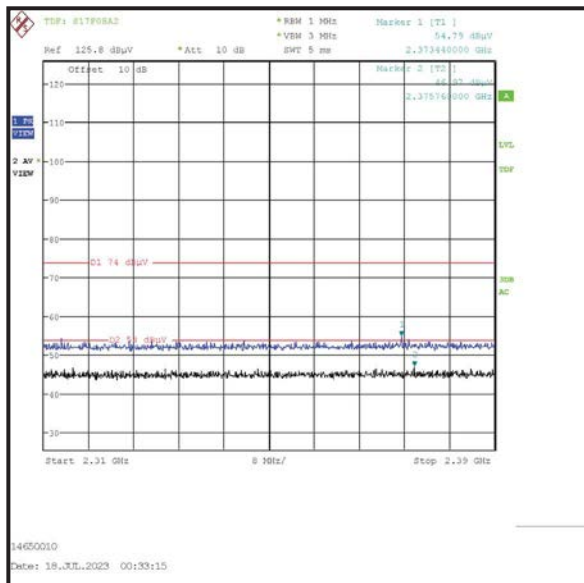

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / DH5 / SISO / Core 2**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2398.718	Vertical	49.3	91.2*	41.9	Complied
2400.0	Vertical	48.6	91.2*	42.6	Complied
2483.5	Vertical	52.8	74.0	21.2	Complied
2483.901	Vertical	53.8	74.0	20.2	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	33.8**	54.0	20.2	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2377.950	Vertical	54.6	74.0	19.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2372.692	Vertical	48.3	54.0	5.7	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / DH5 / SISO / Core 2

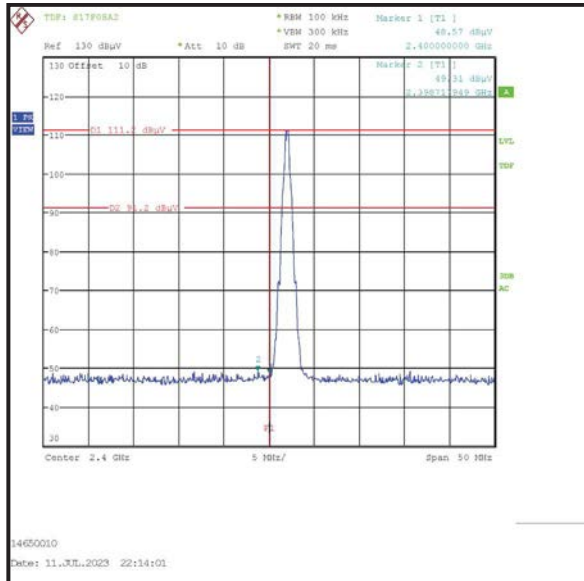

Lower Band Edge

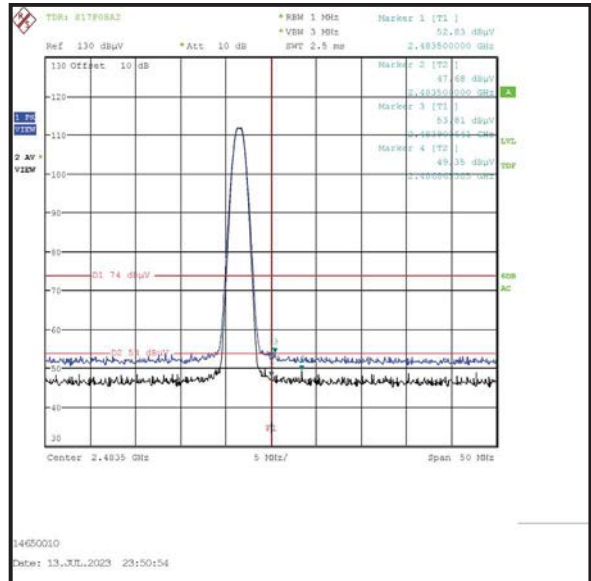

Upper Band Edge

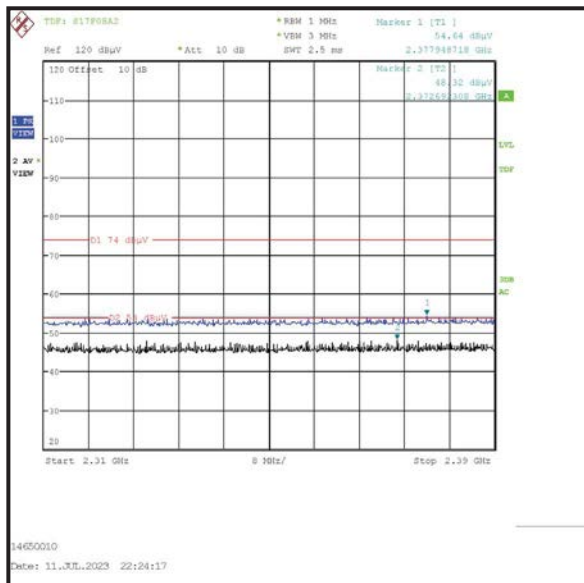

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / DH5 / SISO / Core 2**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2396.683	Vertical	45.2	91.8	46.6	Complied
2400.0	Vertical	43.3	91.8	48.5	Complied
2483.5	Vertical	52.9	74.0	21.1	Complied
2485.103	Vertical	54.8	74.0	19.2	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	33.9**	54.0	20.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2386.795	Vertical	54.3	74.0	19.7	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2360.000	Vertical	47.6	54.0	6.4	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / DH5 / SISO / Core 2

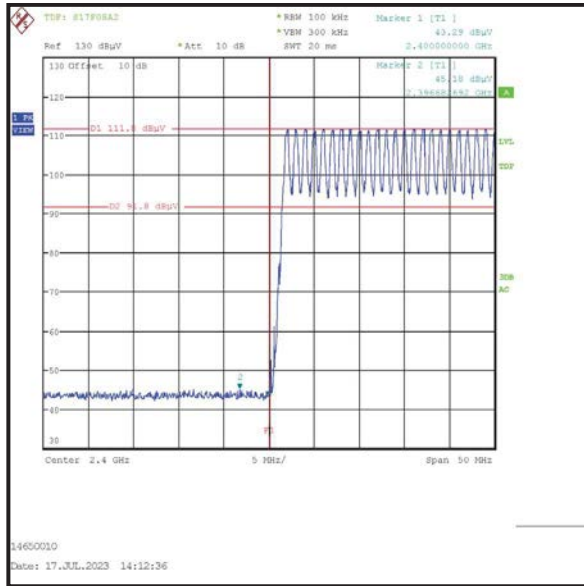

Lower Band Edge

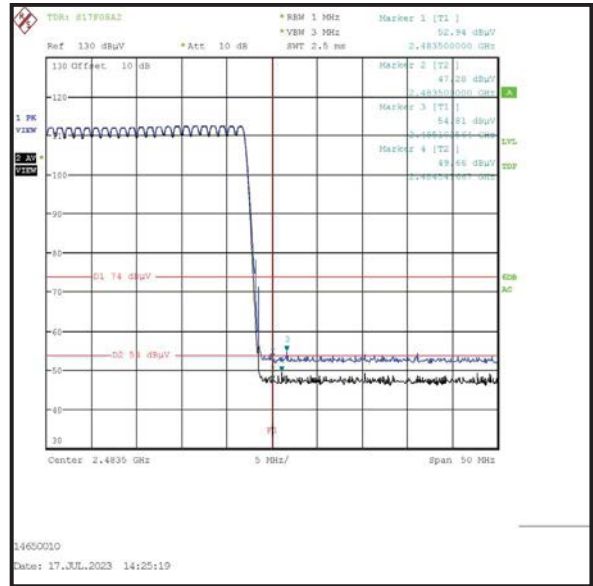

Upper Band Edge

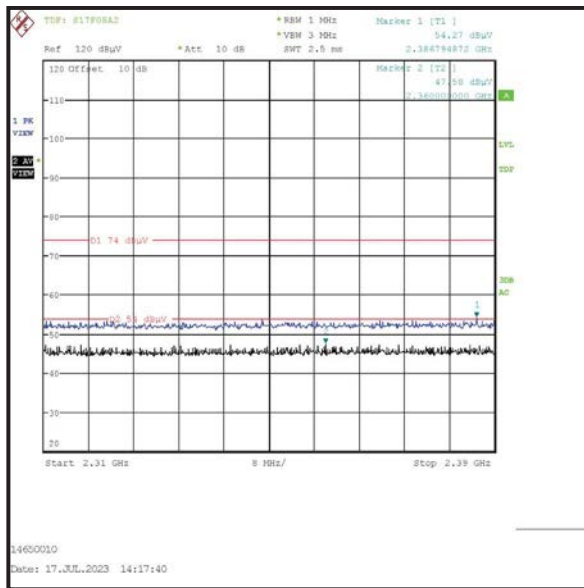

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 2DH5 / SISO / Core 2**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	51.2	87.9*	36.7	Complied
2483.5	Vertical	54.1	74.0	19.9	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	35.1**	54.0	18.9	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2358.462	Vertical	54.5	74.0	19.5	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2382.179	Vertical	48.2	54.0	5.8	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / 2DH5 / SISO / Core 2

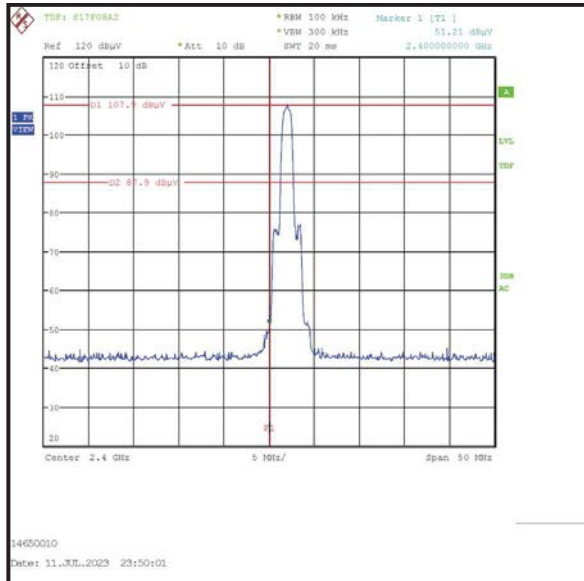

Lower Band Edge

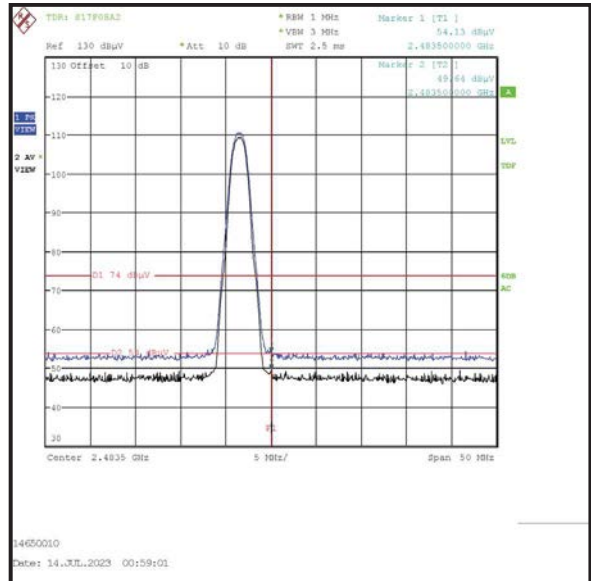

Upper Band Edge

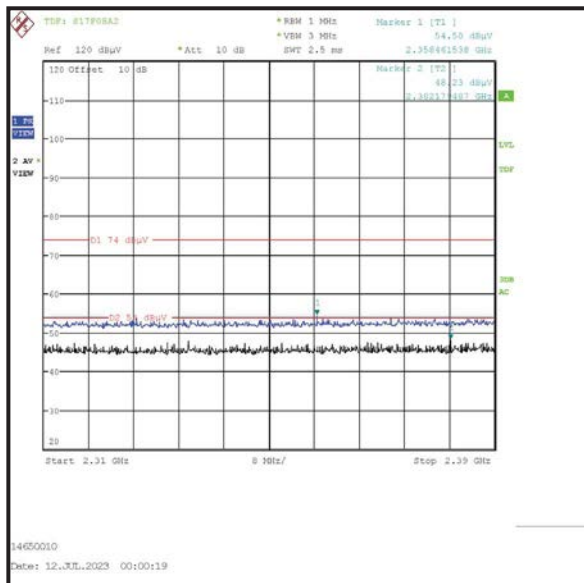

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 2DH5 / SISO / Core 2**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.850	Vertical	49.0	89.7*	40.7	Complied
2400.0	Vertical	48.7	89.7*	41.0	Complied
2483.5	Vertical	53.8	74.0	20.2	Complied
2493.300	Vertical	54.5	74.0	19.5	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	34.8**	54.0	19.2	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2347.440	Vertical	54.4	74.0	19.6	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2331.120	Vertical	46.9	54.0	7.1	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / 2DH5 / SISO / Core 2

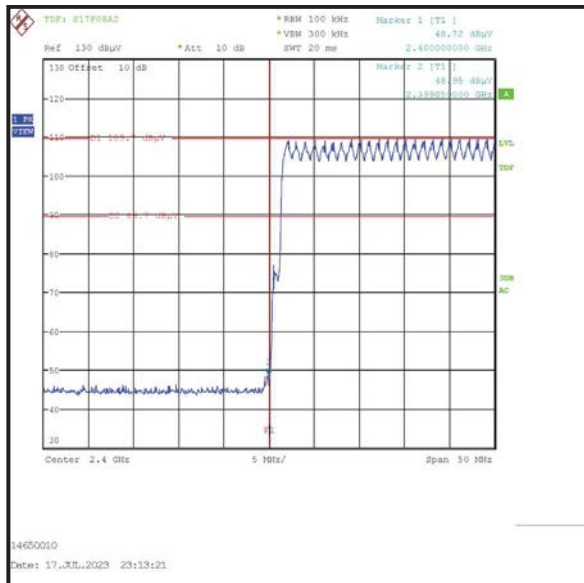

Lower Band Edge

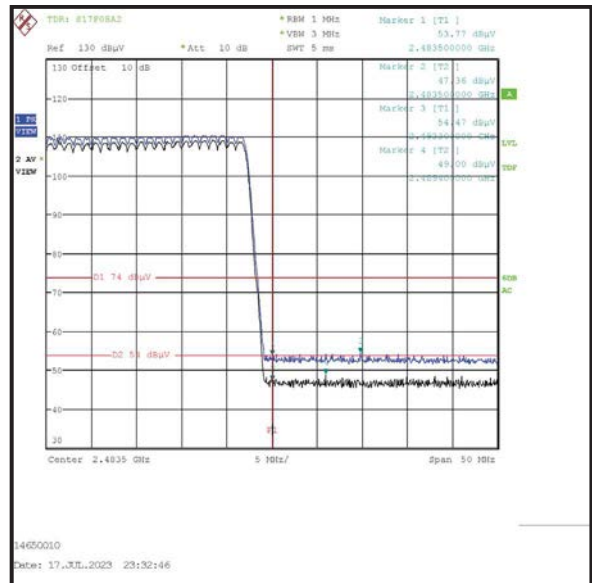

Upper Band Edge

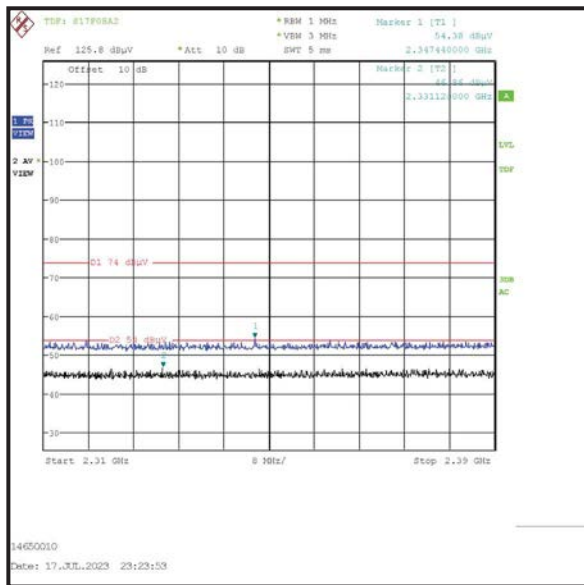

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 3DH5 / SISO / Core 2**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	50.6	88.0*	37.4	Complied
2483.5	Vertical	53.8	74.0	20.2	Complied
2484.301	Vertical	54.7	74.0	19.3	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	34.8**	54.0	19.2	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2320.256	Vertical	54.6	74.0	19.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2379.872	Vertical	49.1	54.0	4.9	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / 3DH5 / SISO / Core 2

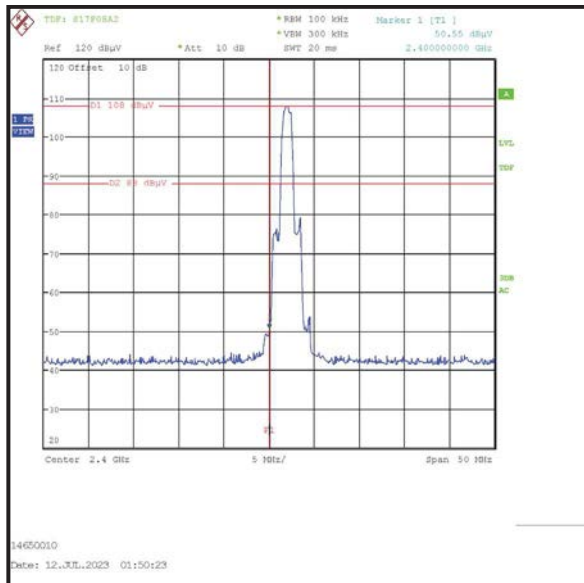

Lower Band Edge

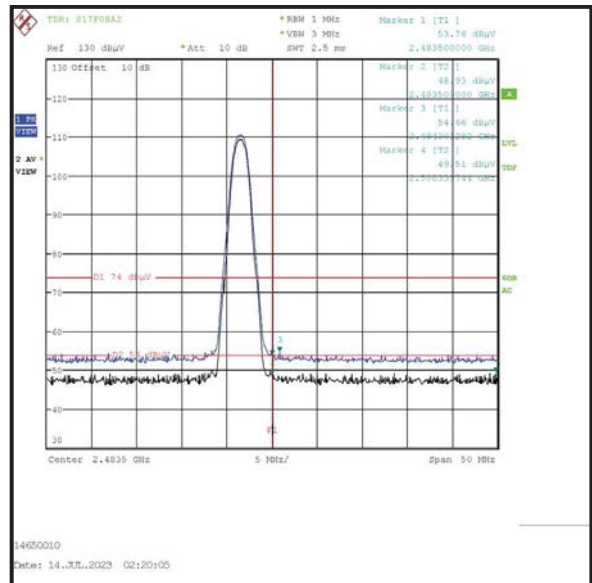

Upper Band Edge

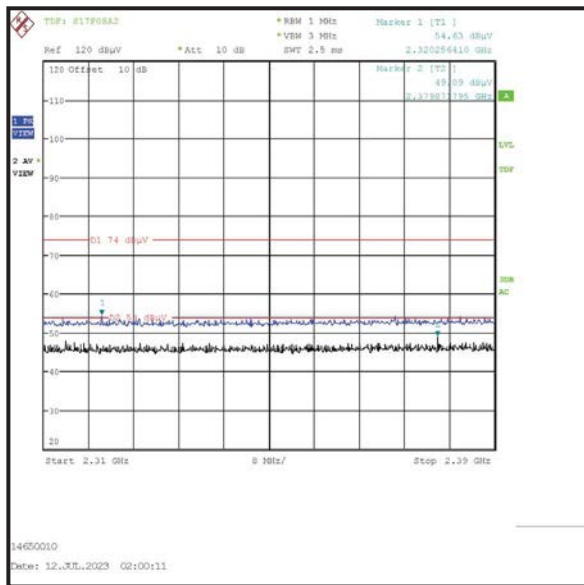

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 3DH5 / SISO / Core 2**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.650	Vertical	49.7	89.9*	40.2	Complied
2400.0	Vertical	46.0	89.9*	43.9	Complied
2483.5	Vertical	52.9	74.0	21.1	Complied
2485.250	Vertical	54.6	74.0	19.4	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	33.9**	54.0	20.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2377.760	Vertical	54.2	74.0	19.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2330.160	Vertical	47.5	54.0	6.5	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / 3DH5 / SISO / Core 2

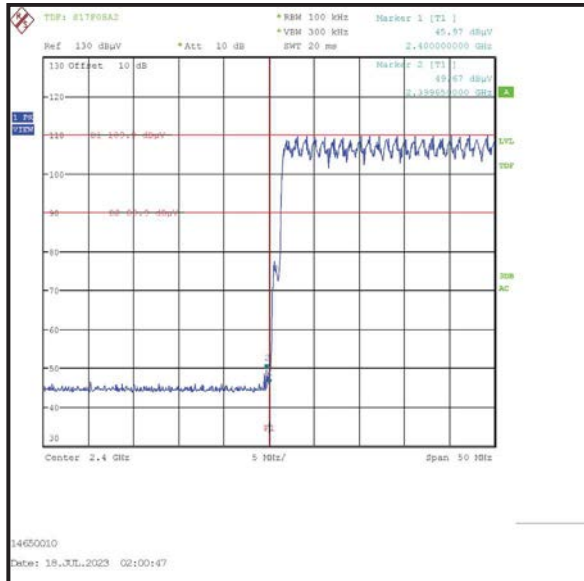

Lower Band Edge

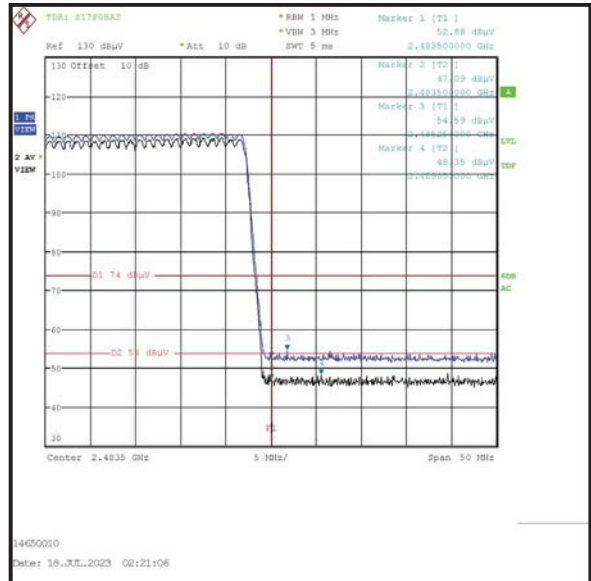

Upper Band Edge

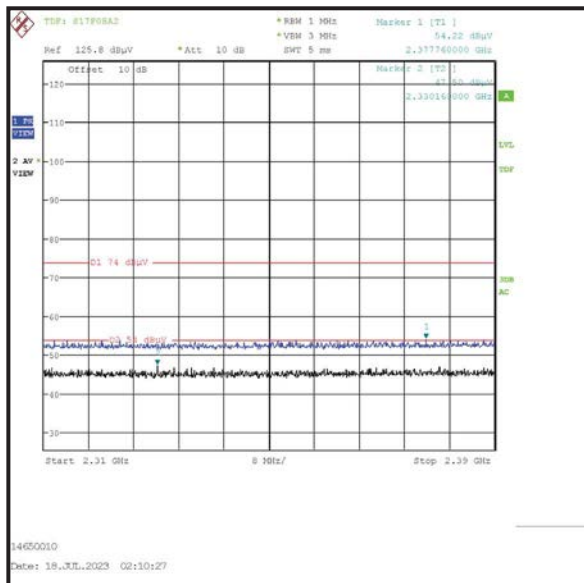

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / DH5 / Beamforming / Core 0 + Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2398.974	Vertical	50.0	96.2*	46.2	Complied
2400.0	Vertical	49.8	96.2*	46.4	Complied
2483.5	Vertical	54.0	74.0	20.0	Complied
2484.061	Vertical	54.7	74.0	19.3	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	35.0**	54.0	19.0	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2388.718	Vertical	54.8	74.0	19.2	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2378.462	Vertical	49.2	54.0	4.8	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / DH5 / Beamforming / Core 0 + Core 1

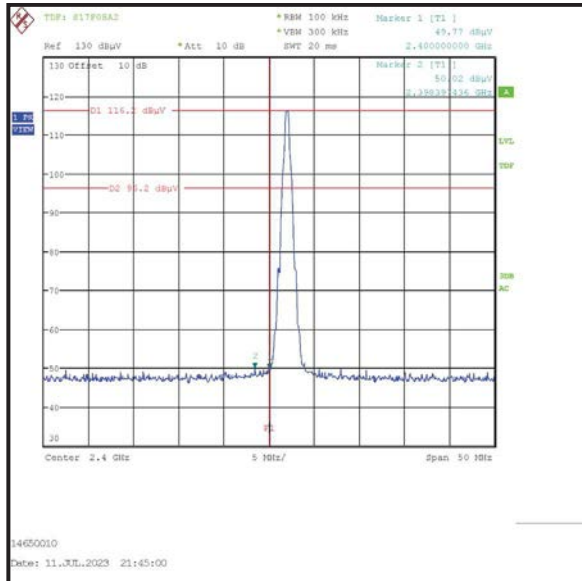

Lower Band Edge

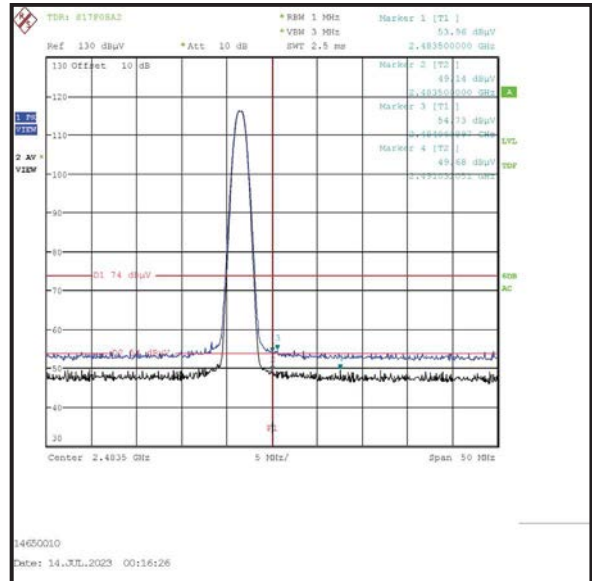

Upper Band Edge

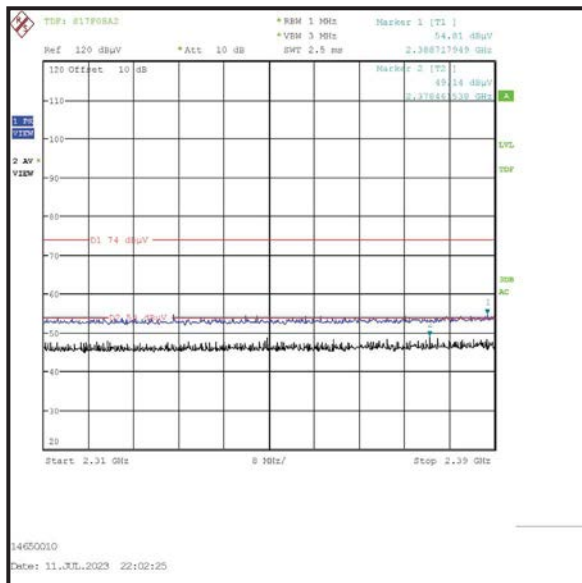

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / DH5 / Beamforming / Core 0 + Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.950	Vertical	48.9	96.9*	48.0	Complied
2400.0	Vertical	46.8	96.9*	50.1	Complied
2483.5	Vertical	53.0	74.0	21.0	Complied
2495.920	Vertical	54.7	74.0	19.3	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	34.0**	54.0	20.0	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2367.179	Vertical	54.7	74.0	19.3	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2335.641	Vertical	48.2	54.0	5.8	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / DH5 / Beamforming / Core 0 + Core 1

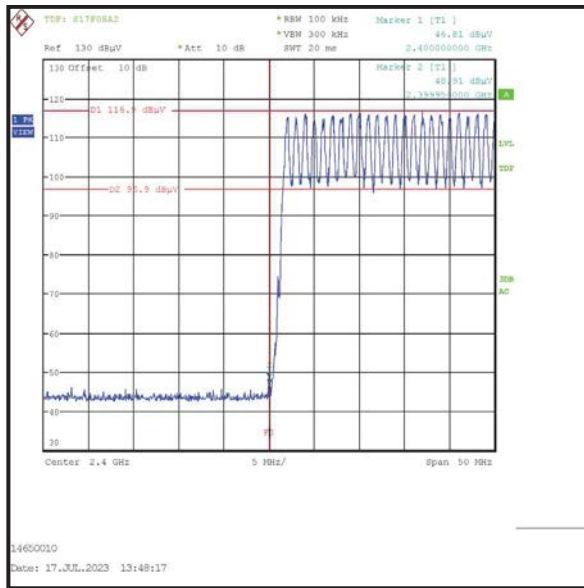

Lower Band Edge

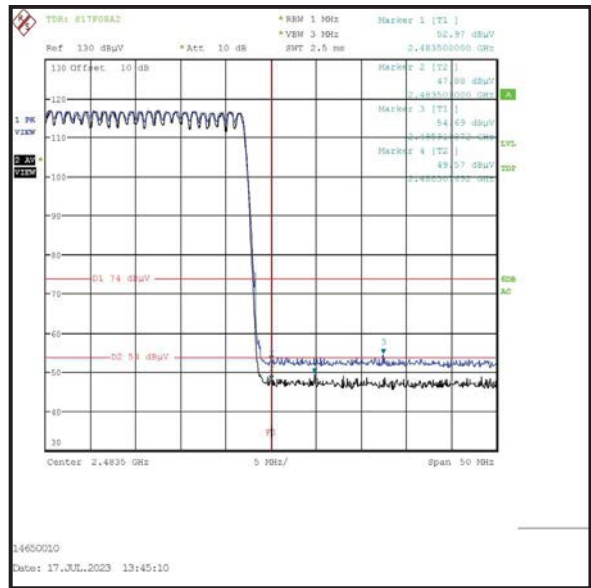

Upper Band Edge

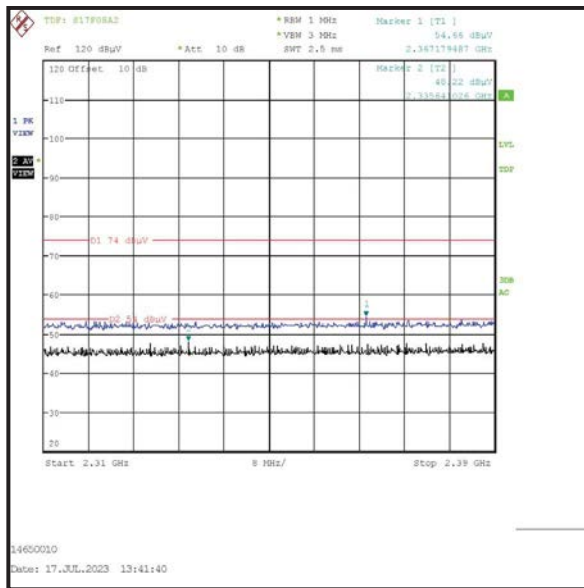

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 2DH5 / Beamforming / Core 0 + Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.760	Vertical	54.6	92.9*	38.3	Complied
2400.0	Vertical	54.3	92.9*	38.6	Complied
2483.5	Vertical	55.2	74.0	18.8	Complied
2487.747	Vertical	55.6	74.0	18.4	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	36.2**	54.0	17.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2339.103	Vertical	54.3	74.0	19.7	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2375.385	Vertical	48.0	54.0	6.0	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / 2DH5 / Beamforming / Core 0 + Core 1

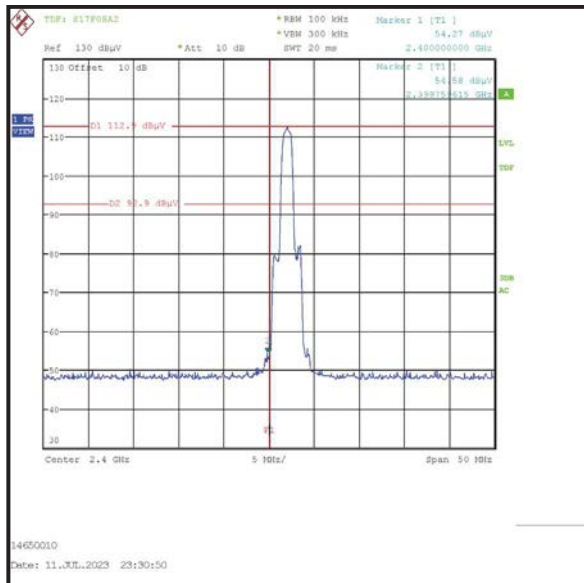

Lower Band Edge

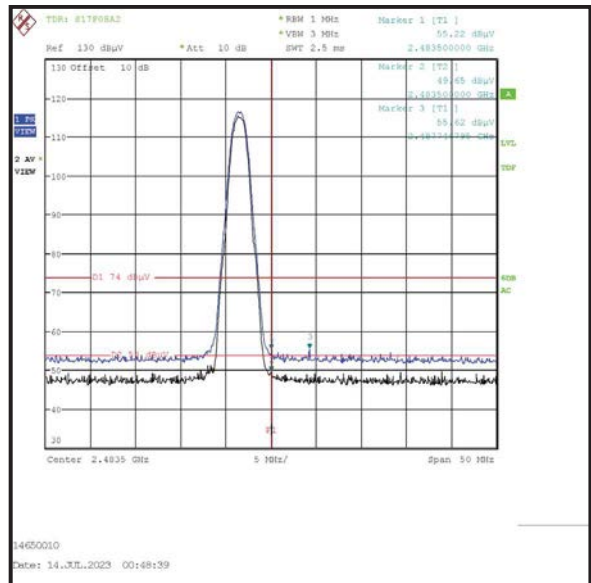

Upper Band Edge

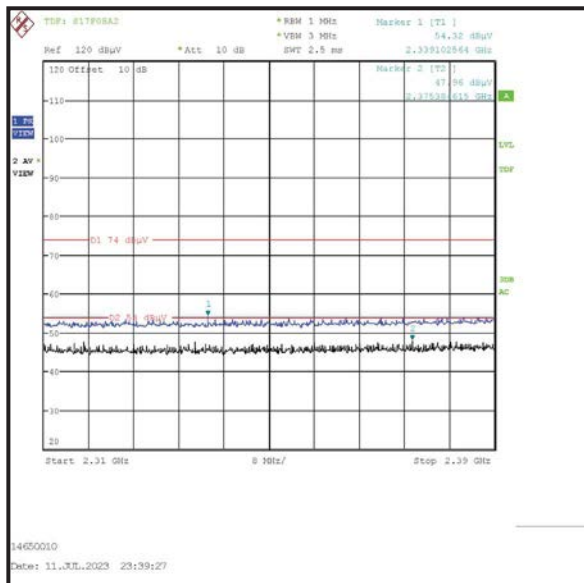

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 2DH5 / Beamforming / Core 0 + Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	54.6	94.6*	40.0	Complied
2483.5	Vertical	52.6	74.0	21.4	Complied
2496.000	Vertical	54.7	74.0	19.3	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	33.6**	54.0	20.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2387.920	Vertical	54.7	74.0	19.3	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2379.680	Vertical	47.5	54.0	6.5	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / 2DH5 / Beamforming / Core 0 + Core 1

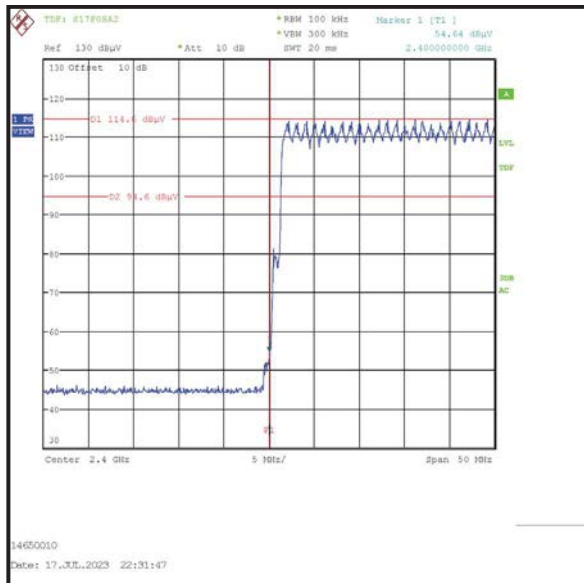

Lower Band Edge

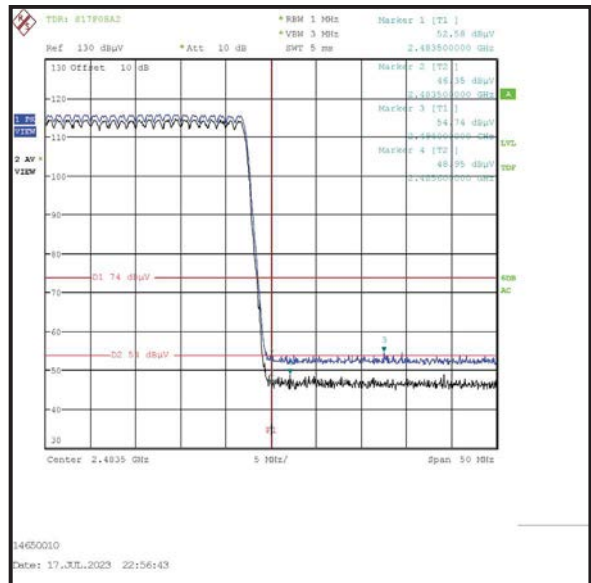

Upper Band Edge

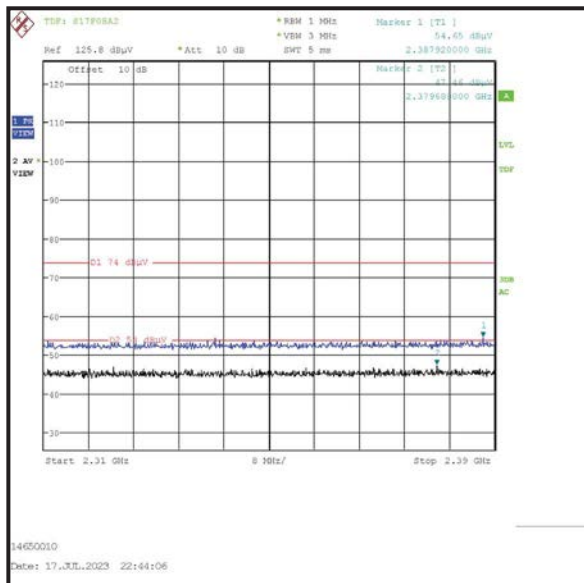

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 3DH5 / Beamforming / Core 0 + Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.679	Vertical	53.8	92.7*	38.9	Complied
2400.0	Vertical	52.0	92.7*	40.7	Complied
2483.5	Vertical	54.0	74.0	20.0	Complied
2483.740	Vertical	54.5	74.0	19.5	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	35.0**	54.0	19.0	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2376.923	Vertical	54.7	74.0	19.3	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2364.615	Vertical	49.1	54.0	4.9	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Static Mode / 3DH5 / Beamforming / Core 0 + Core 1

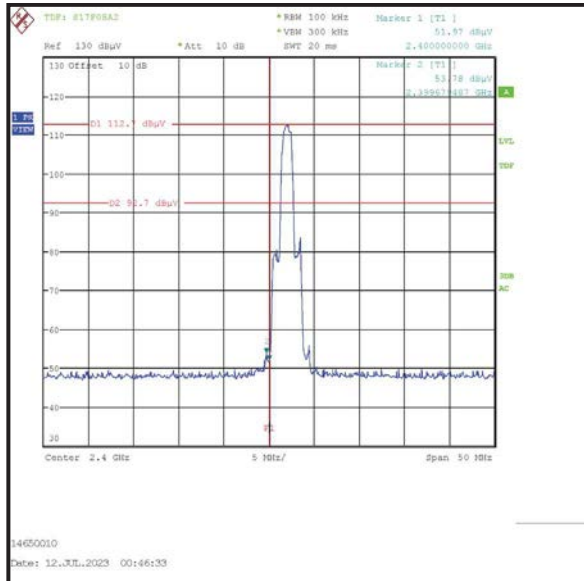

Lower Band Edge

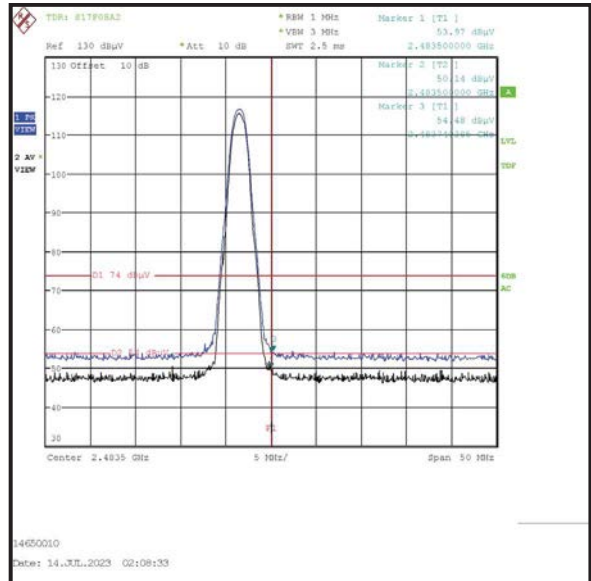

Upper Band Edge

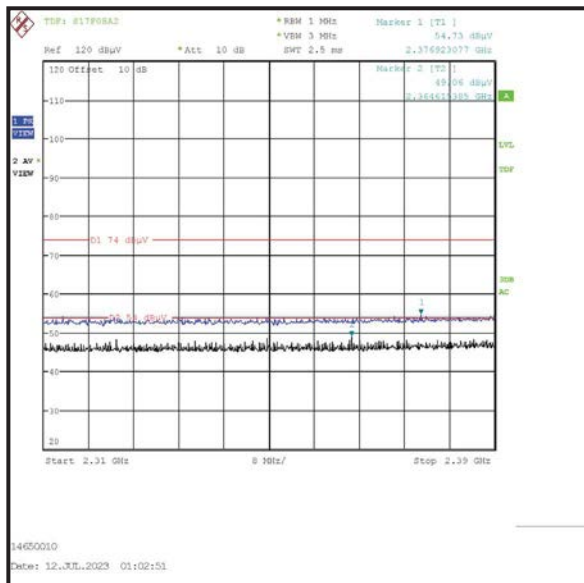

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 3DH5 / Beamforming / Core 0 + Core 1**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.550	Vertical	53.8	94.5*	40.7	Complied
2400.0	Vertical	51.8	94.5*	42.7	Complied
2483.5	Vertical	53.2	74.0	20.8	Complied
2497.250	Vertical	54.7	74.0	19.3	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	34.2**	54.0	19.8	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2372.560	Vertical	54.4	74.0	19.6	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average


Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2377.760	Vertical	48.0	54.0	6.0	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Hopping Mode / 3DH5 / Beamforming / Core 0 + Core 1

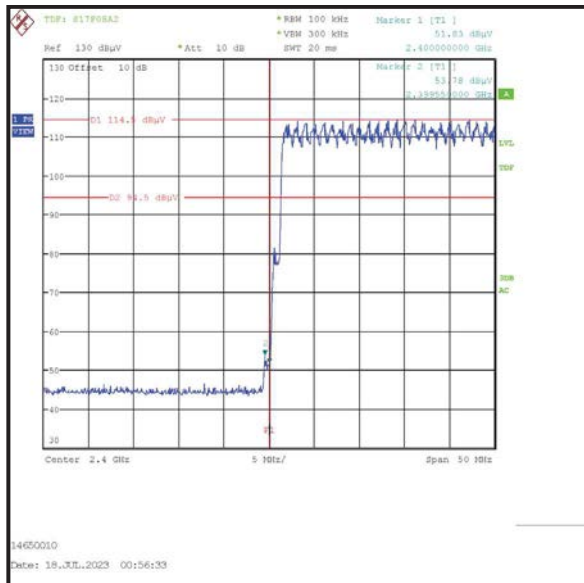

Lower Band Edge

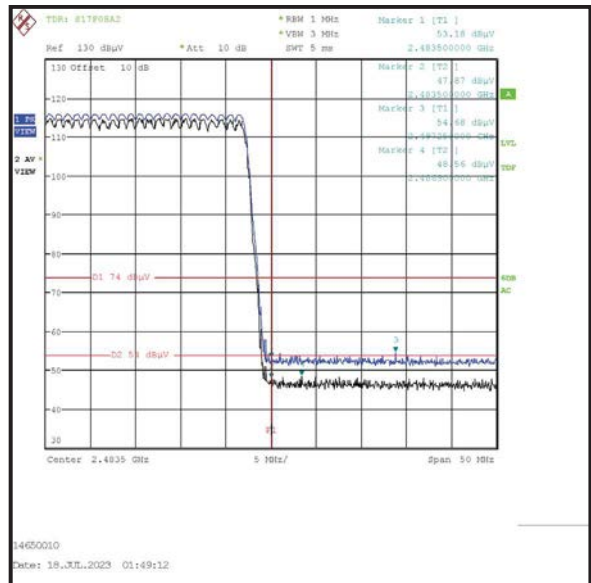

Upper Band Edge

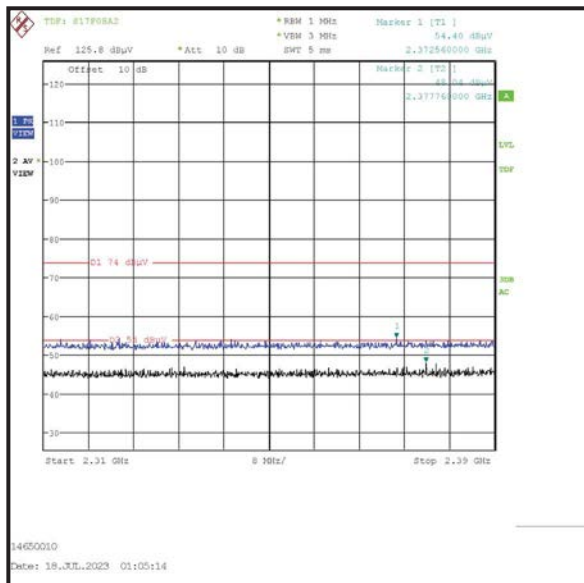

2310 MHz to 2390 MHz Restricted Band

Appendix 1

FHSS Duty Cycle Correction Factor Calculation

In accordance with KDB 558074 section 9 and ANSI C63.10 section 7.5, a duty cycle correction factor may be applied to calculate the average radiated field strength emission levels for an FHSS device.

The following values were taken from the *Bluetooth* Core Specification V5.0 to give the worst case correction:

Modulation	DH5, 2DH5 and 3DH5
Channel Hopping Rate (Hops/s)	1600
Tx Timeslots	5
Rx Timeslots	1
Adjusted Hopping Rate for Adaptive Frequency Hopping (Hops/s)	266.667
Time per Hop (ms)	3.75
Minimum Number of Channels	20
Time per Hop Sequence (ms)	75
Maximum Number of Hops on One Channel in any 100 ms Observation Period	3
Maximum Dwell Time on One Channel in any 100 ms Observation Period (ms)	11.25
Calculated Duty cycle correction factor applied (dB)	19.0
Maximum Duty cycle correction factor applied (dB)	19.0

The duty cycle correction factor was calculated based on the above values:

$$DH5, 2DH5 \text{ and } 3DH5: 20 * \text{Log}(11.25 \text{ ms} / 100 \text{ ms}) = 19.0 \text{ dB}$$

--- END OF REPORT ---