

Figure 165 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

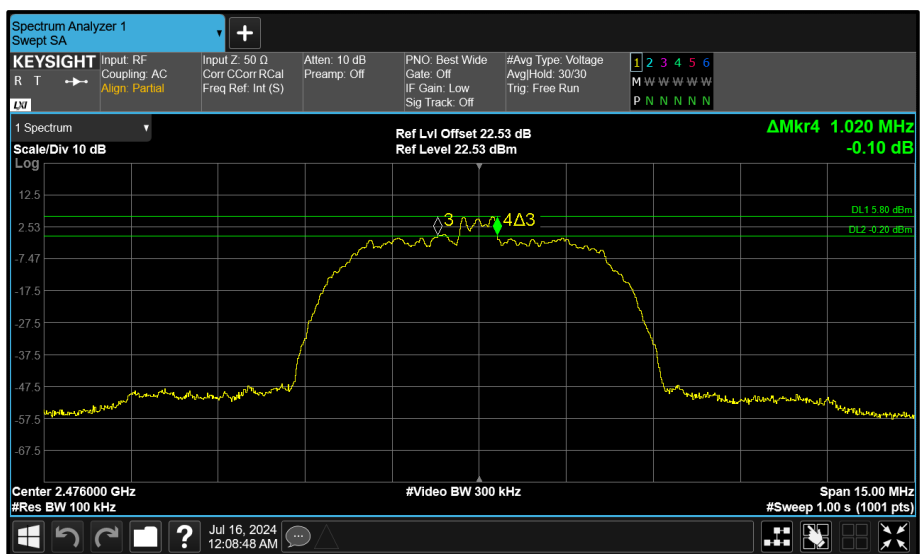


Figure 166 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	0.728	0.660	-	-	≥500.0
2440	0.732	0.704	-	-	≥500.0
2480	0.720	0.728	-	-	≥500.0

**Table 45 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.040	1.036	-	-	-
2440	1.040	1.040	-	-	-
2480	1.040	1.040	-	-	-

**Table 46 - 99% Bandwidth Results**

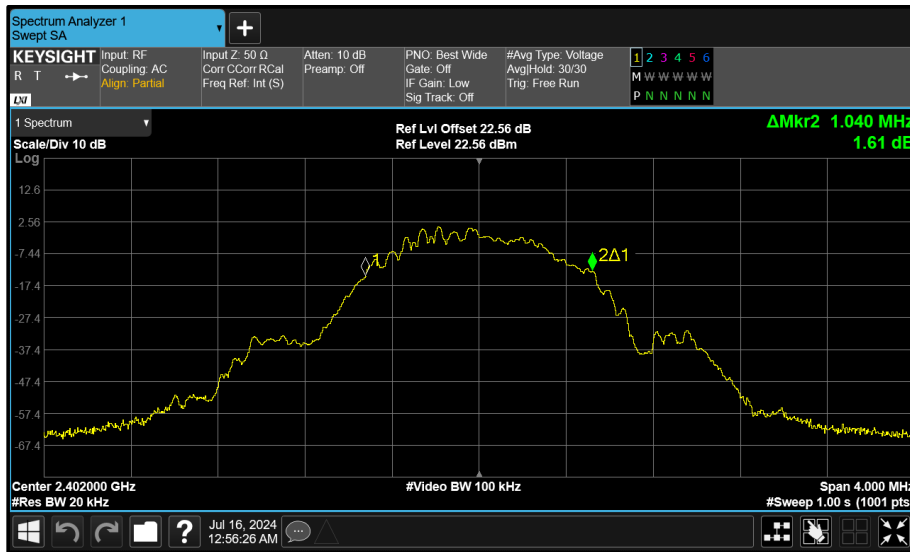


Figure 167 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

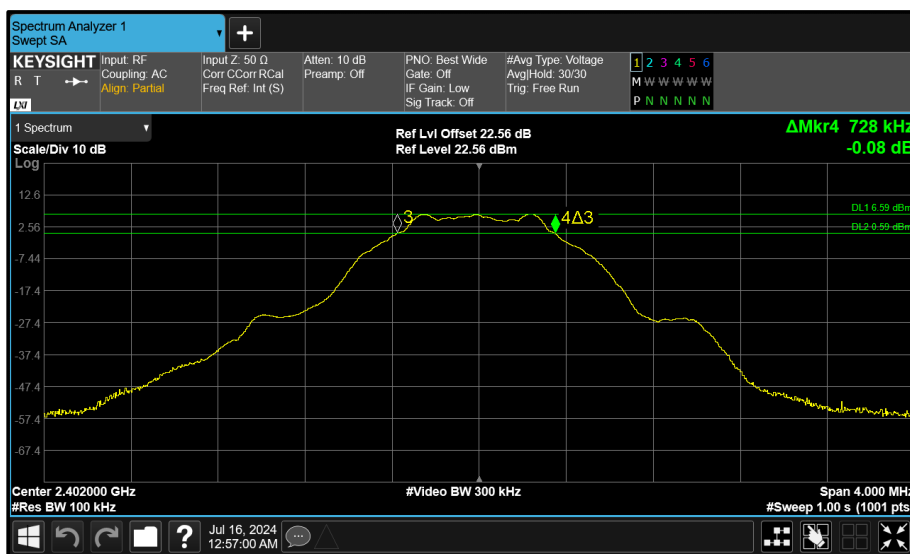


Figure 168 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

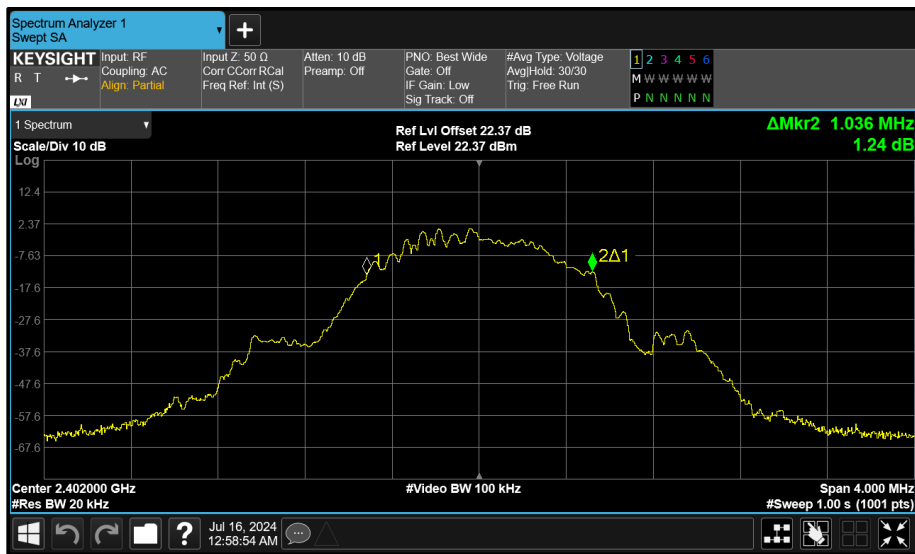


Figure 169 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

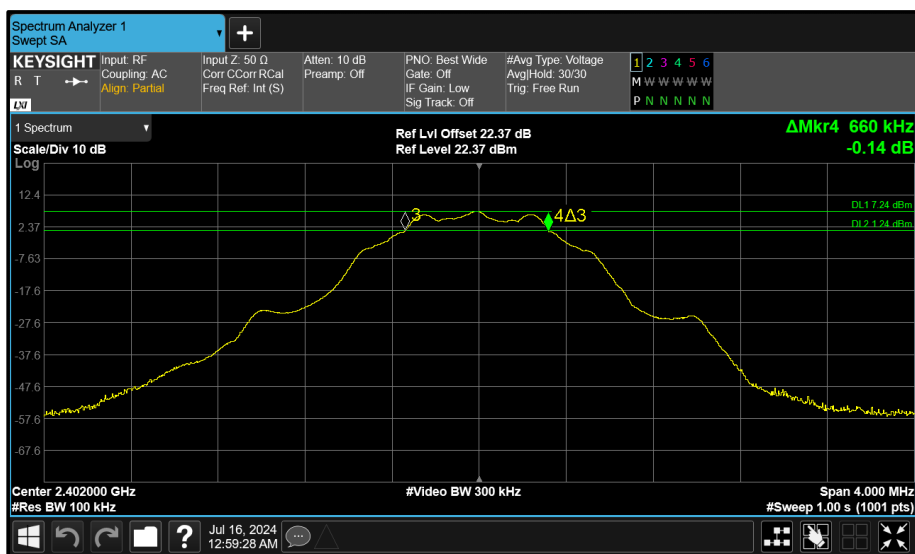


Figure 170 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

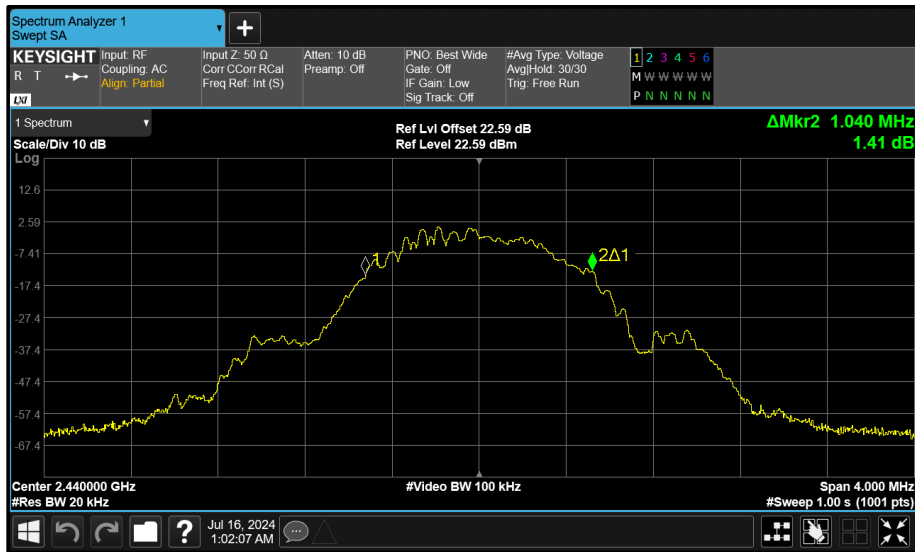


Figure 171 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

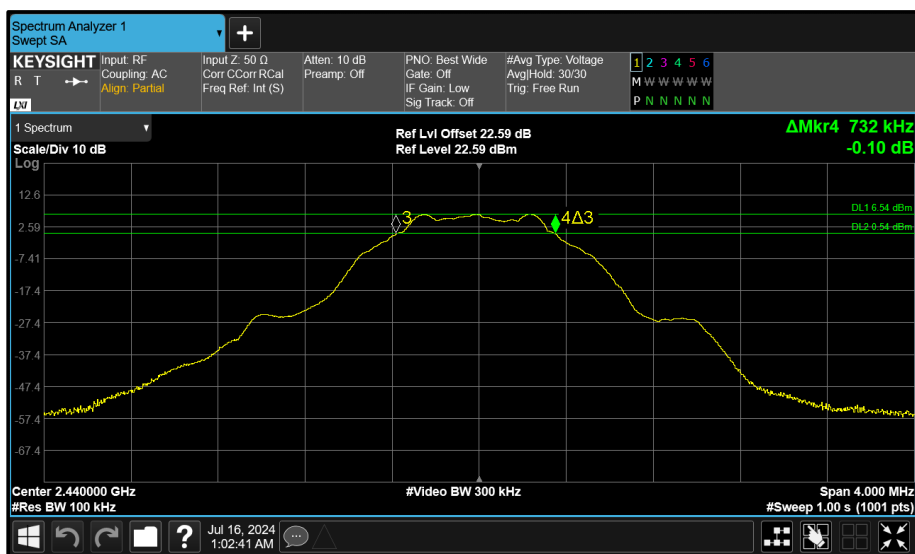


Figure 172 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth

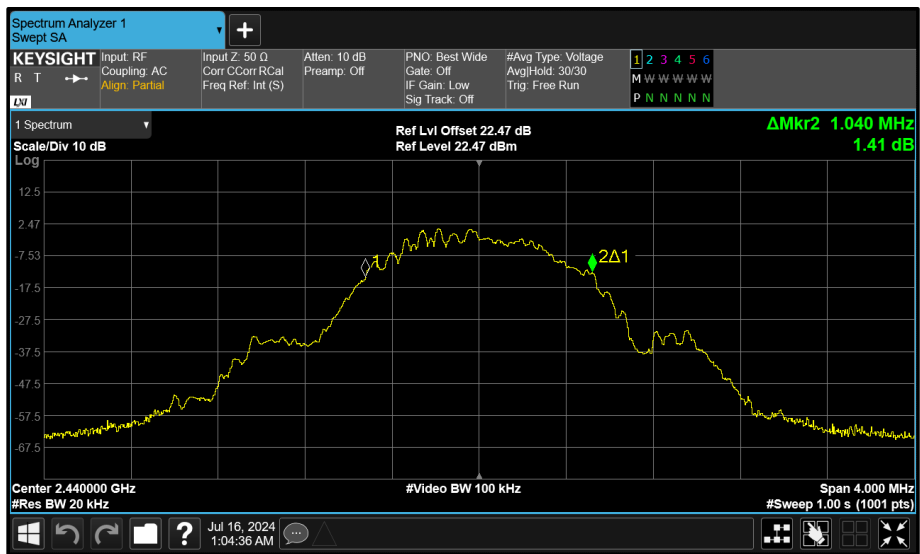


Figure 173 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

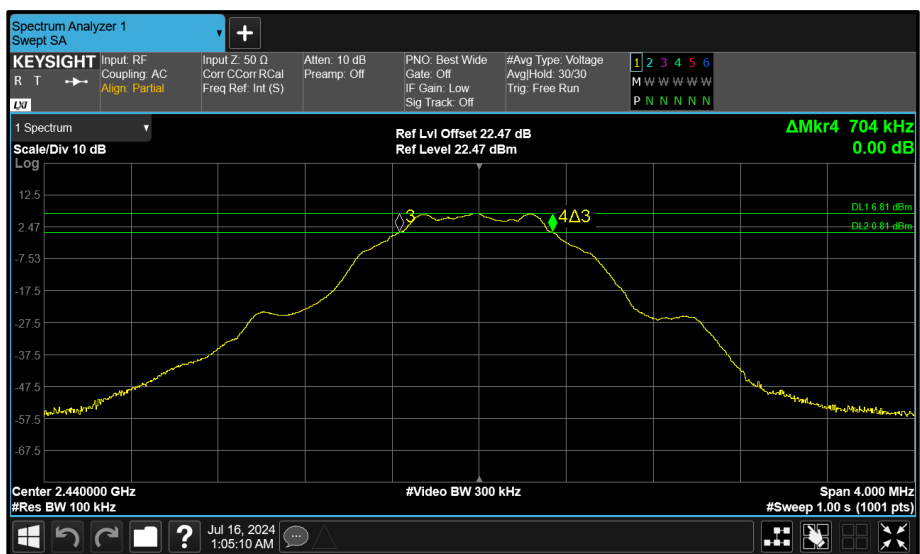


Figure 174 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

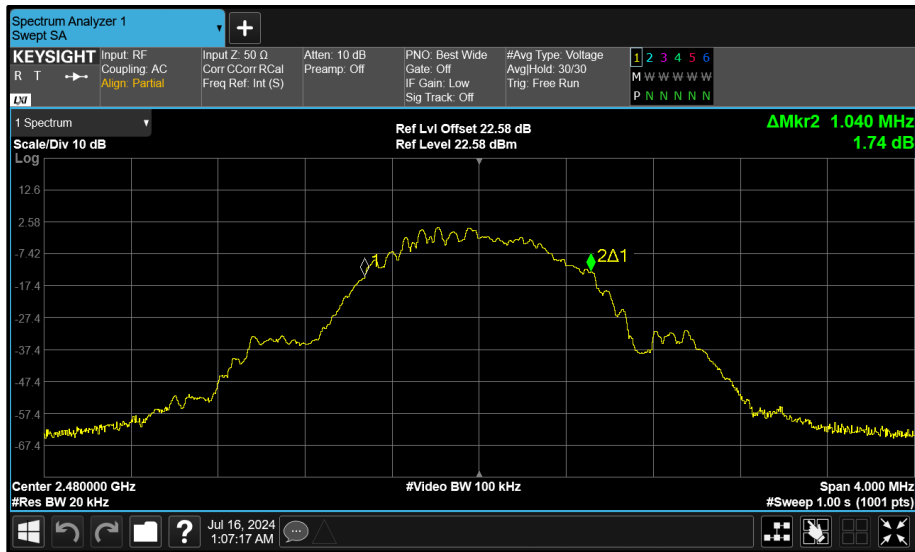


Figure 175 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

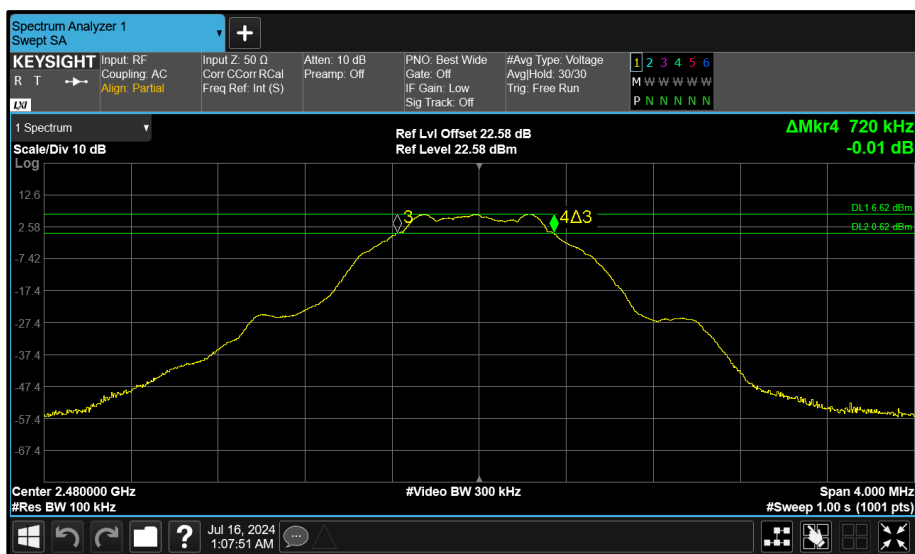


Figure 176 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth

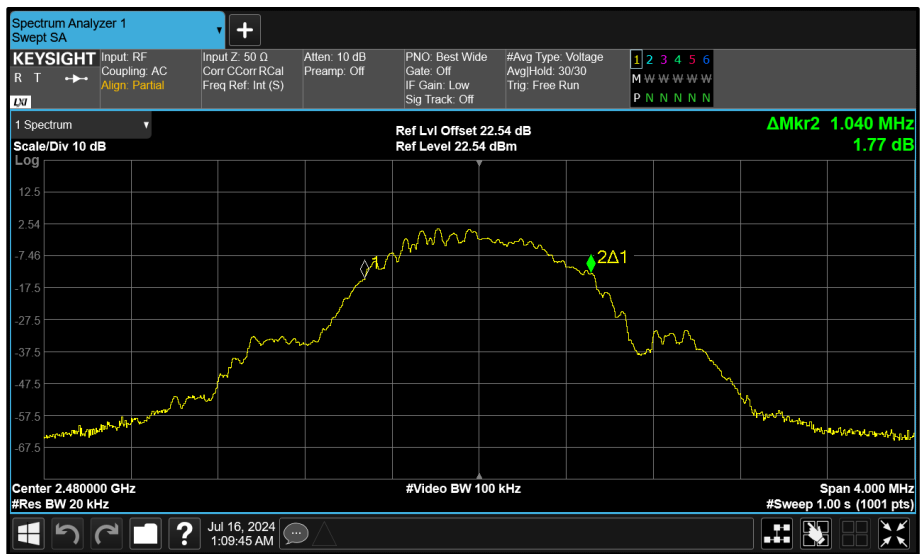


Figure 177 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

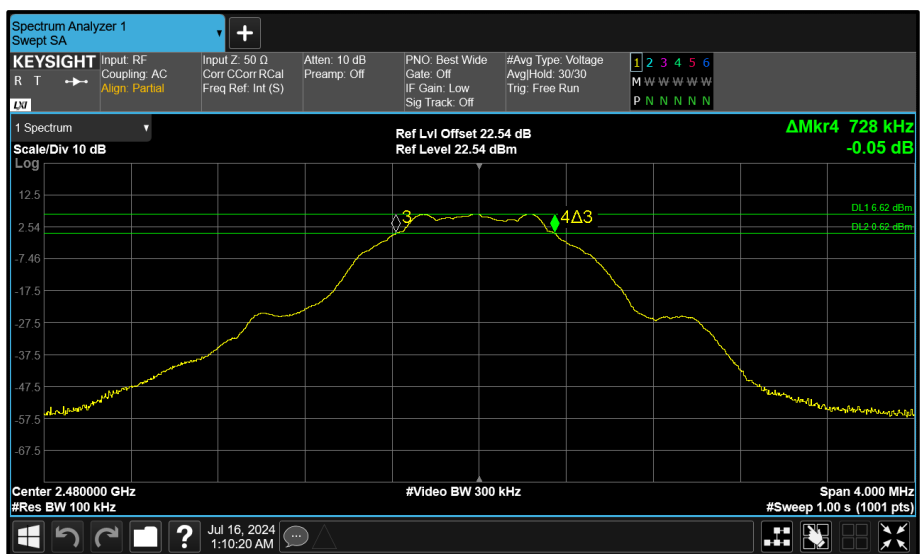


Figure 178 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.280	1.176	-	-	≥500.0
2440	1.272	1.256	-	-	≥500.0
2480	1.272	1.256	-	-	≥500.0

**Table 47 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	2.088	2.096	-	-	-
2440	2.088	2.088	-	-	-
2480	2.088	2.088	-	-	-

**Table 48 - 99% Bandwidth Results**

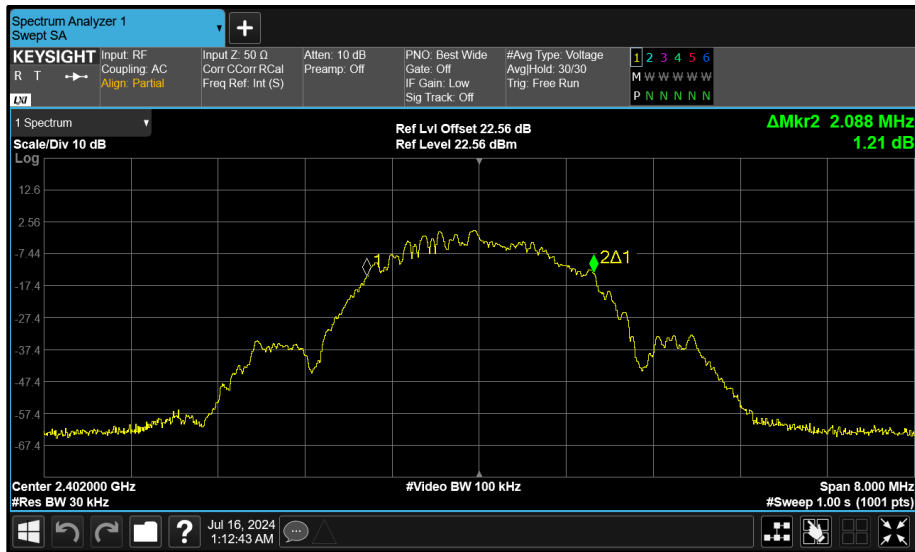


Figure 179 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

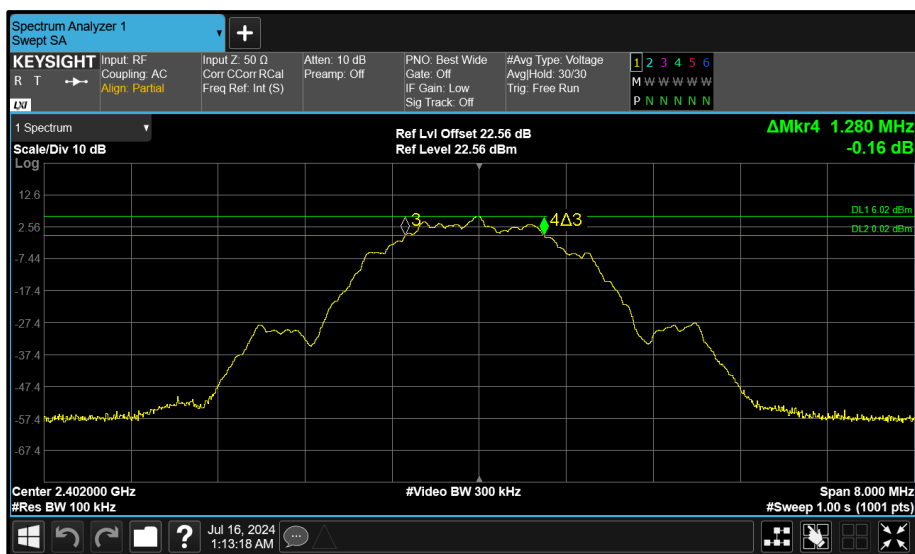


Figure 180 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

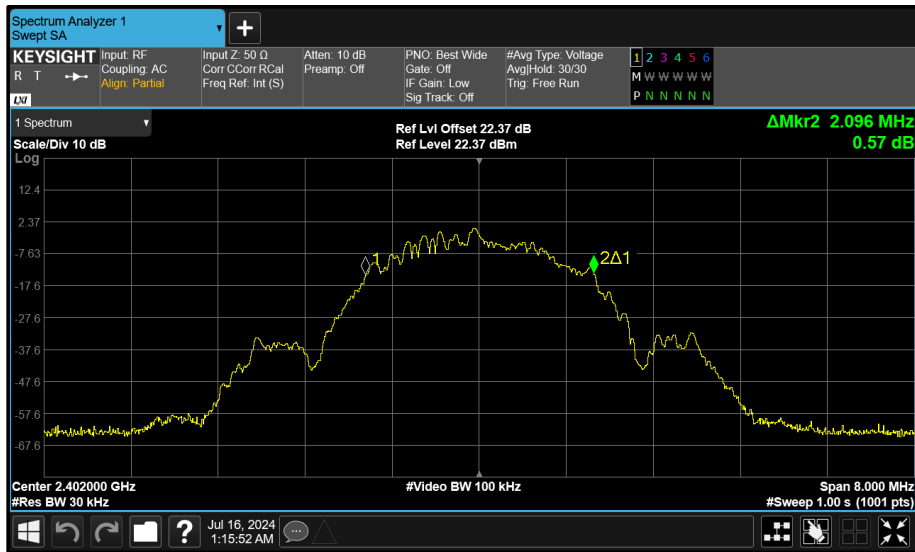


Figure 181 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

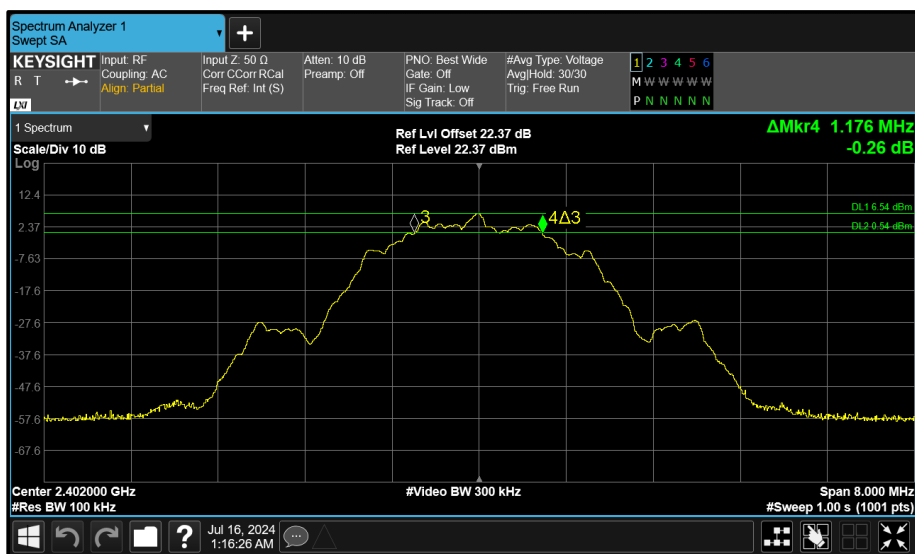


Figure 182 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

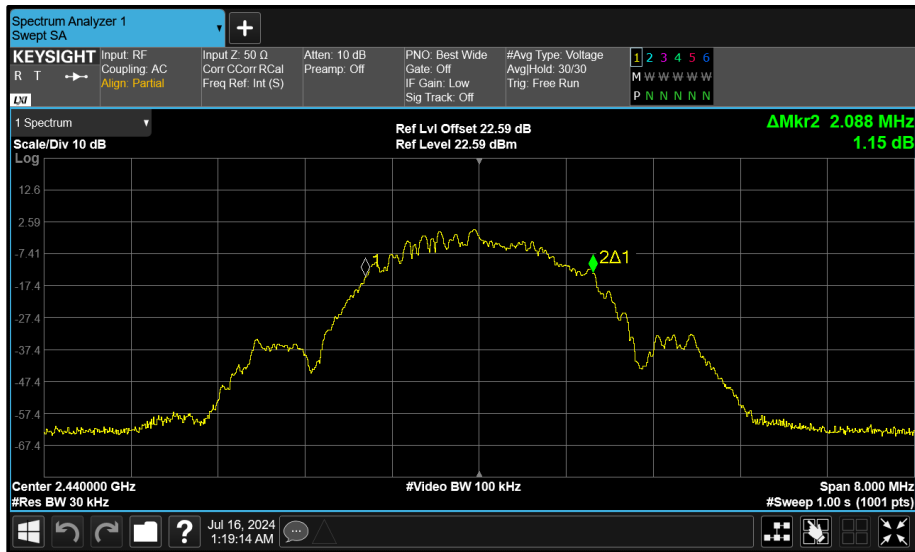


Figure 183 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

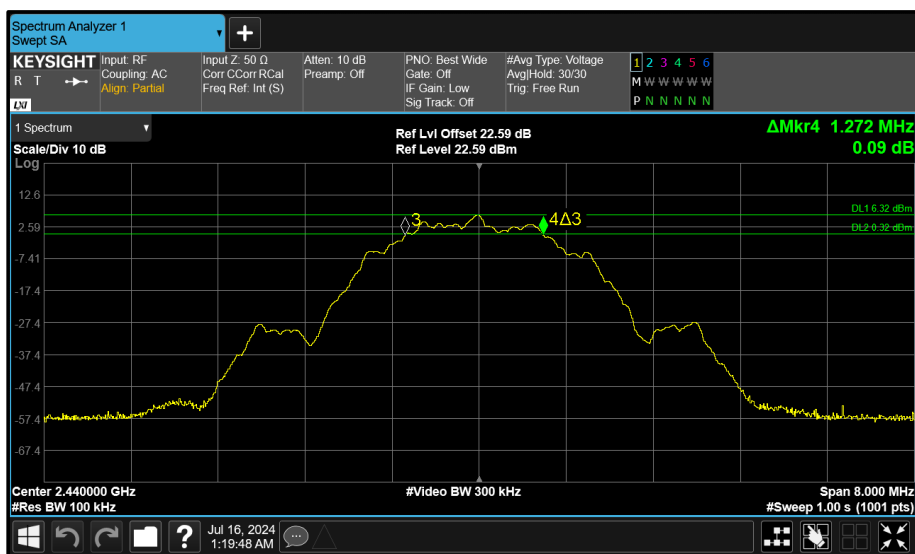


Figure 184 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth

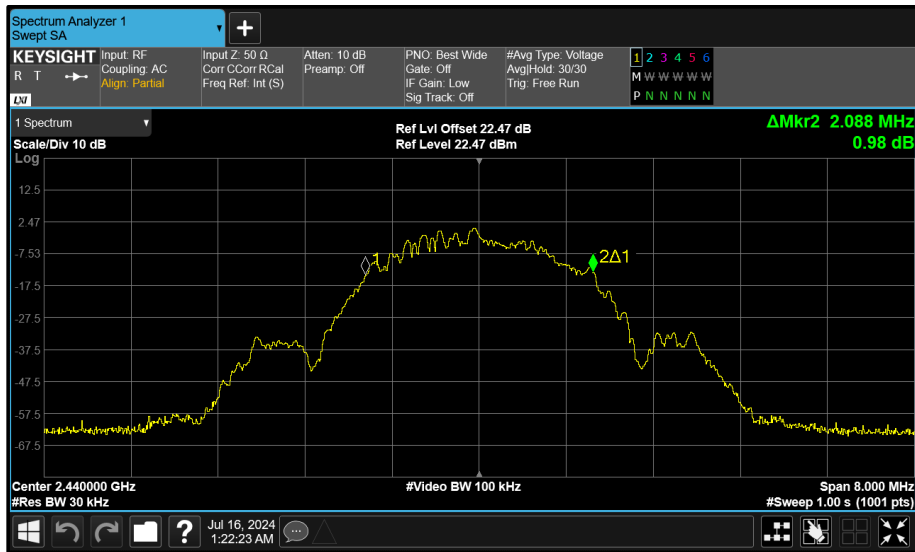


Figure 185 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

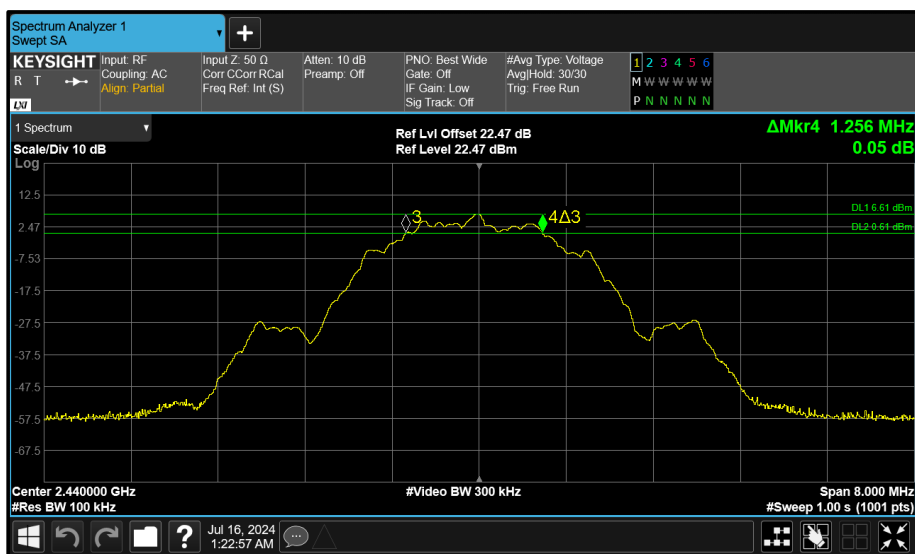


Figure 186 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

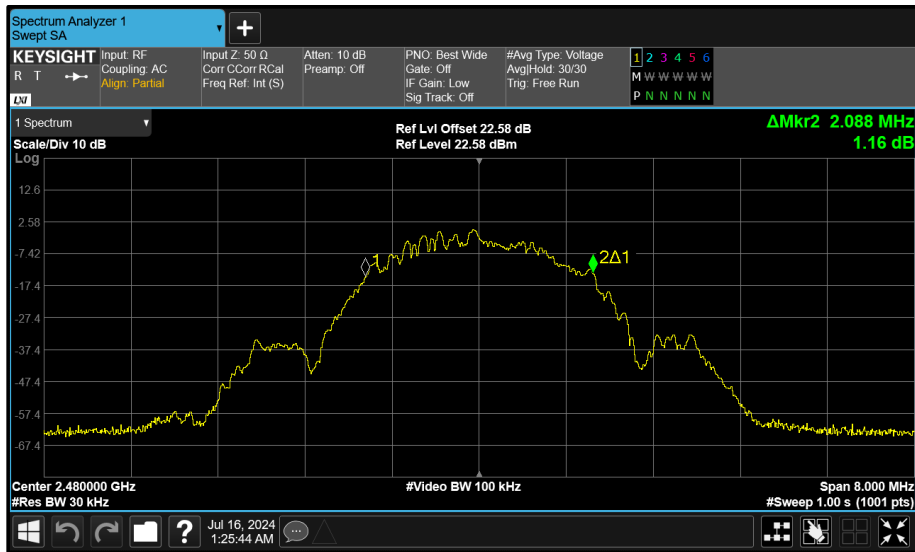


Figure 187 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

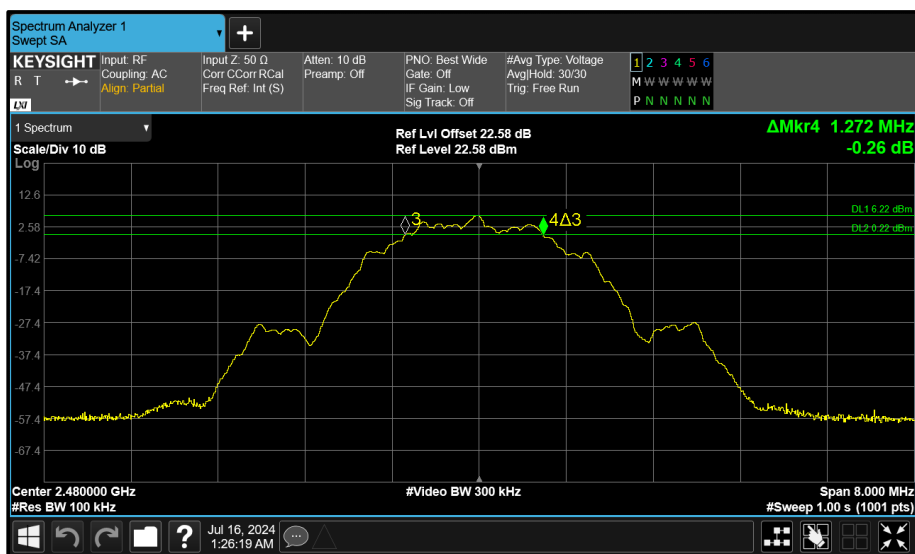


Figure 188 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth

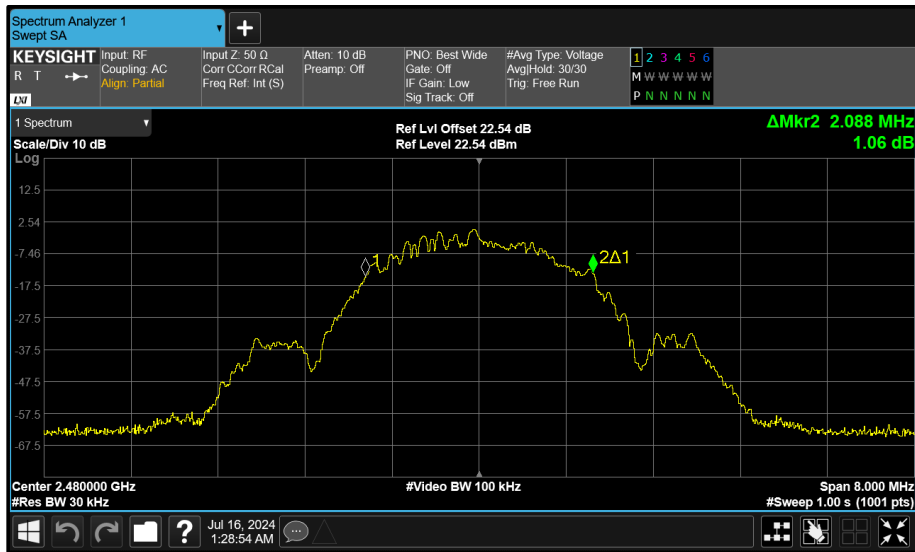


Figure 189 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

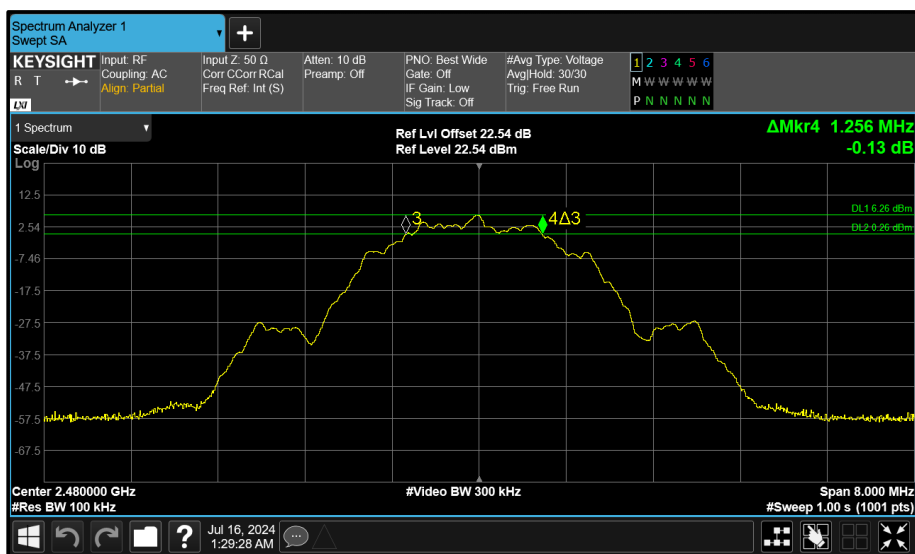


Figure 190 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	1.912	1.896	-	-	$\geq 500.0$
2441	1.904	1.904	-	-	$\geq 500.0$
2476	1.872	1.904	-	-	$\geq 500.0$

**Table 49 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.344	2.328	-	-	-
2441	2.344	2.328	-	-	-
2476	2.344	2.336	-	-	-

**Table 50 - 99% Bandwidth Results**



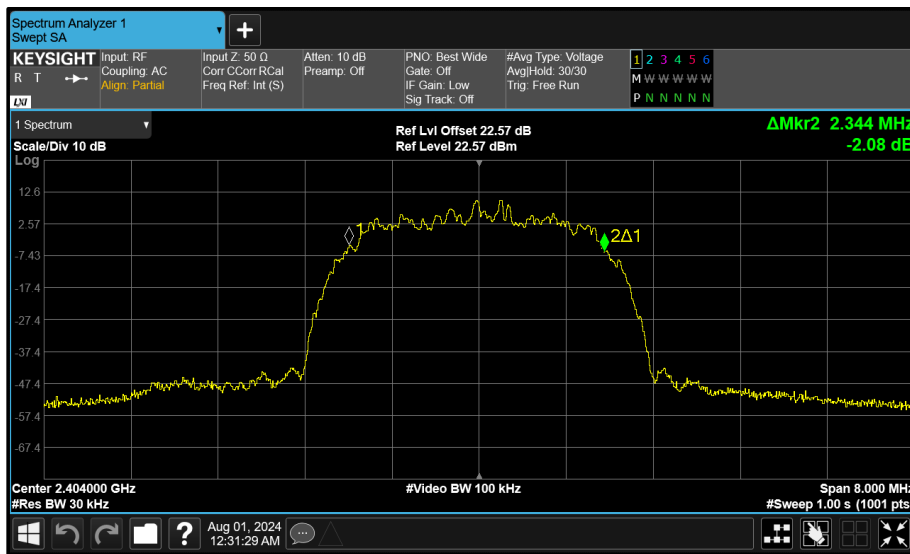


Figure 191 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

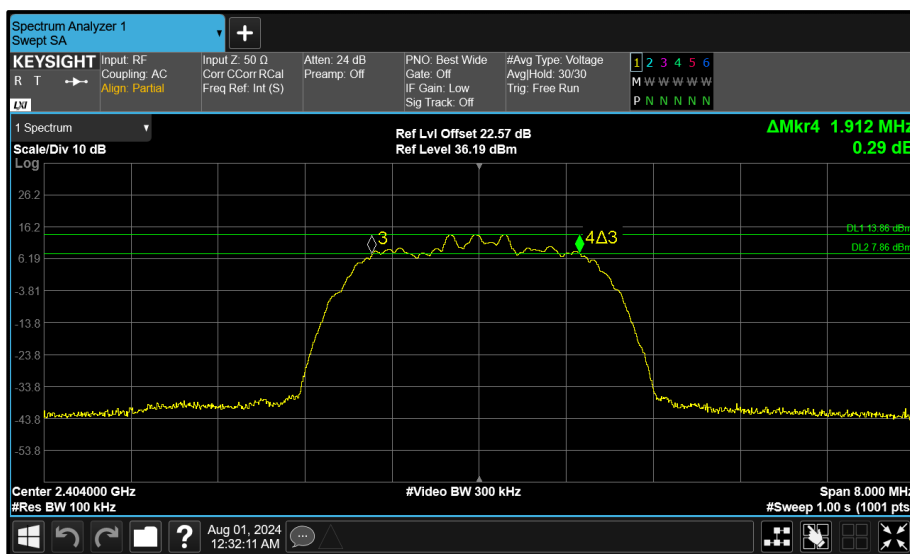


Figure 192 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

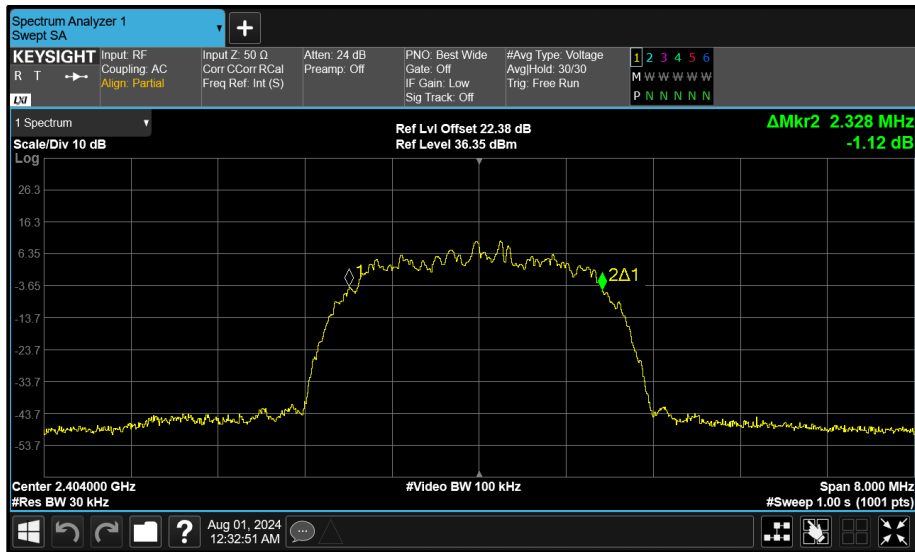


Figure 193 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

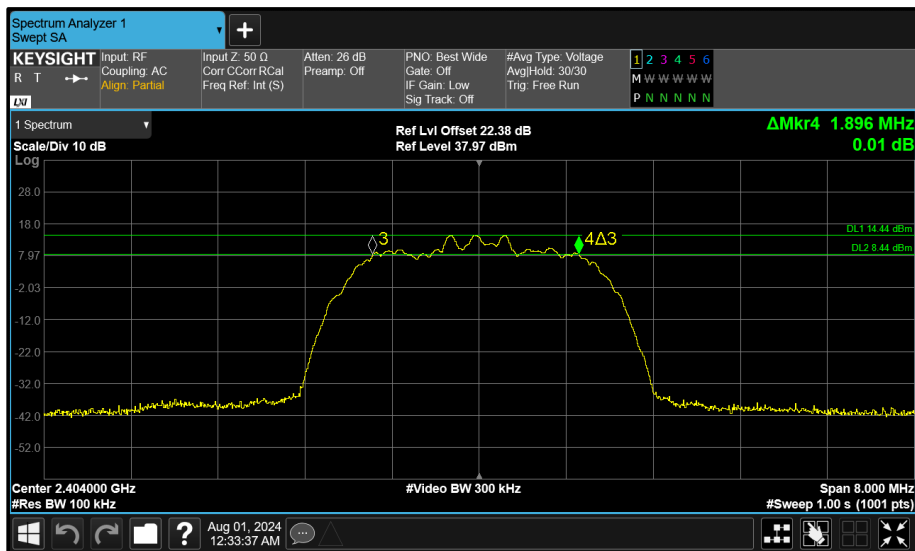


Figure 194 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

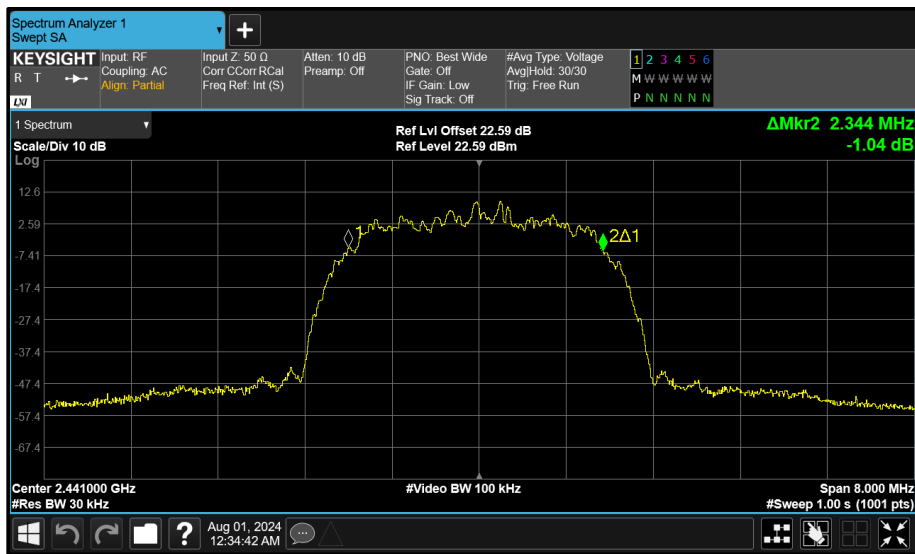


Figure 195 - Core 0 (A) 2441 MHz (CH39) 99% Bandwidth

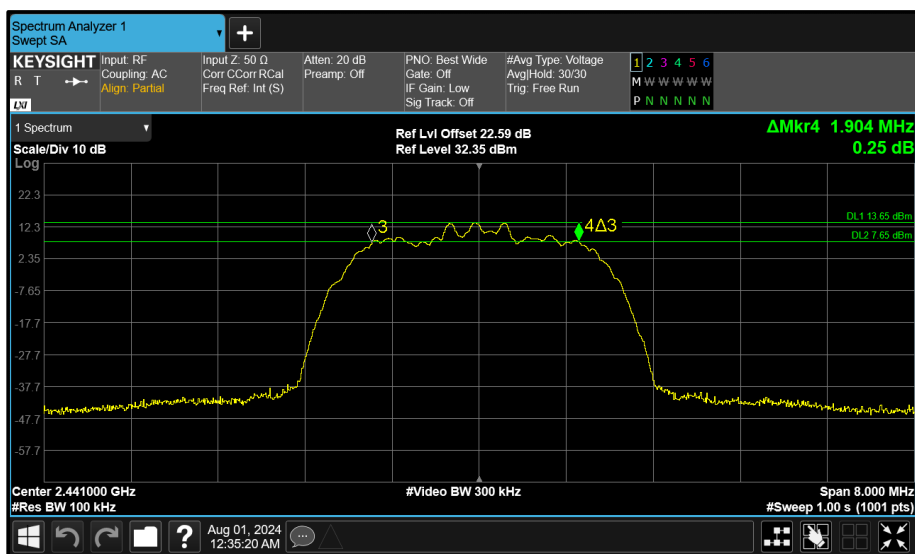


Figure 196 - Core 0 (A) 2441 MHz (CH39) 6 dB Bandwidth

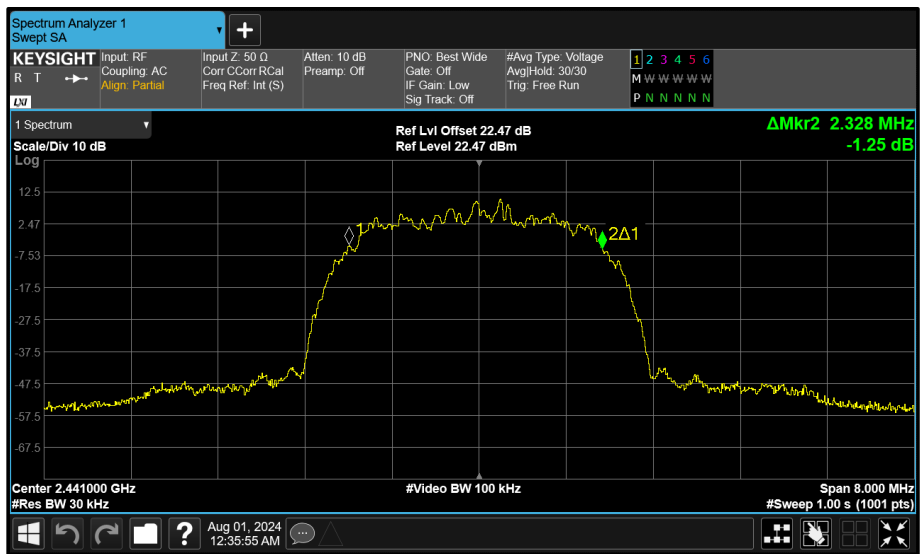


Figure 197 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

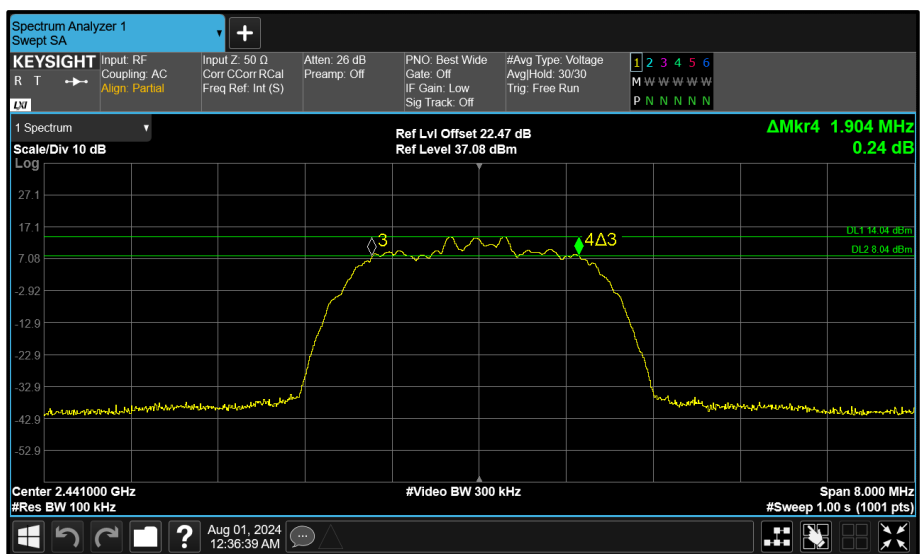


Figure 198 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

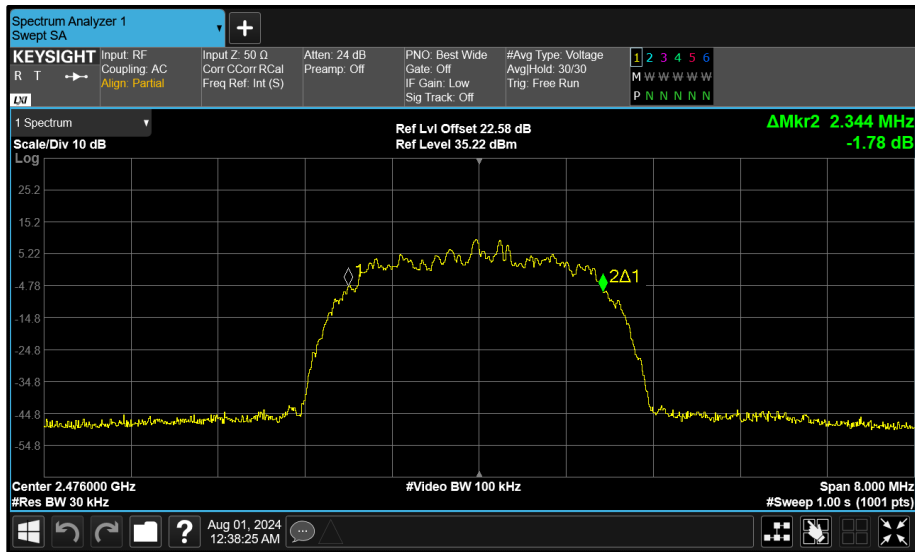


Figure 199 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

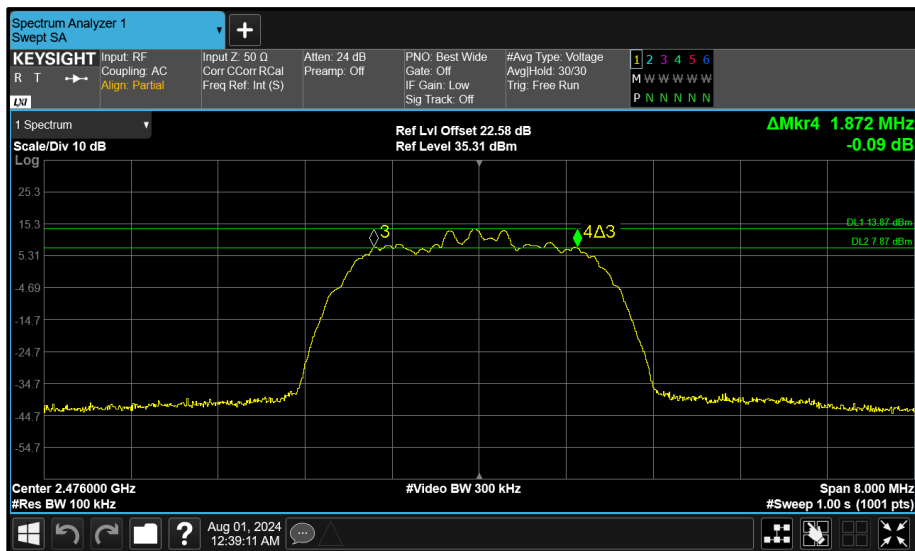


Figure 200 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth

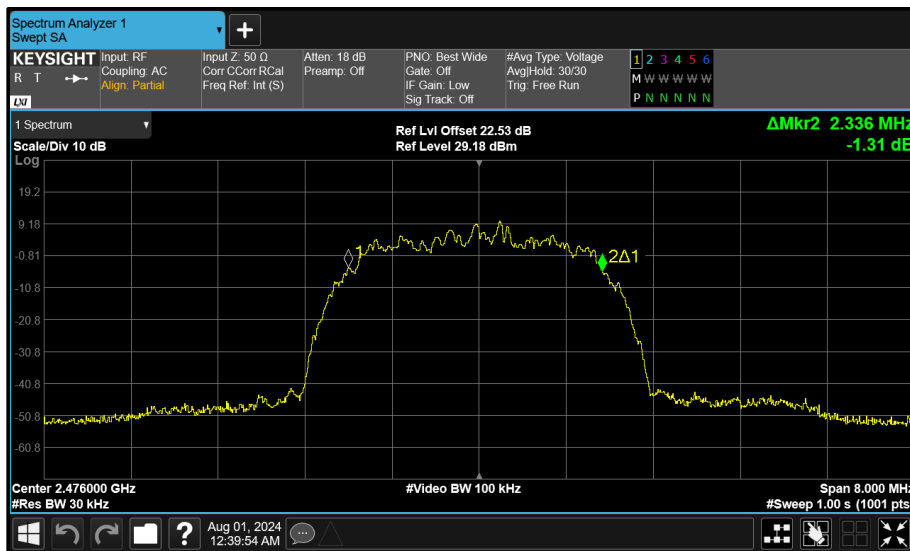


Figure 201 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

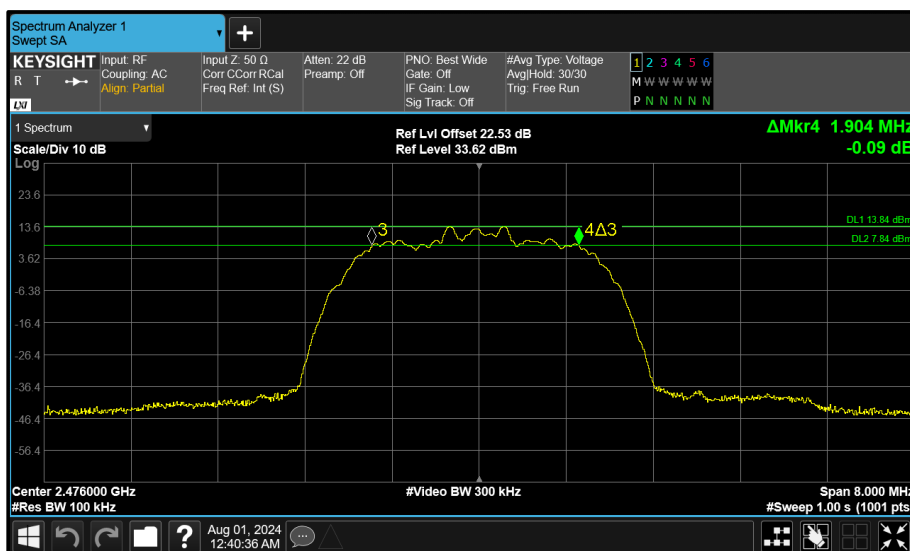


Figure 202 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	1.005	0.660	-	-	$\geq 500.0$
2441	0.660	1.020	-	-	$\geq 500.0$
2476	0.675	1.020	-	-	$\geq 500.0$

**Table 51 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.710	4.620	-	-	-
2441	4.710	4.635	-	-	-
2476	4.695	4.635	-	-	-

**Table 52 - 99% Bandwidth Results**

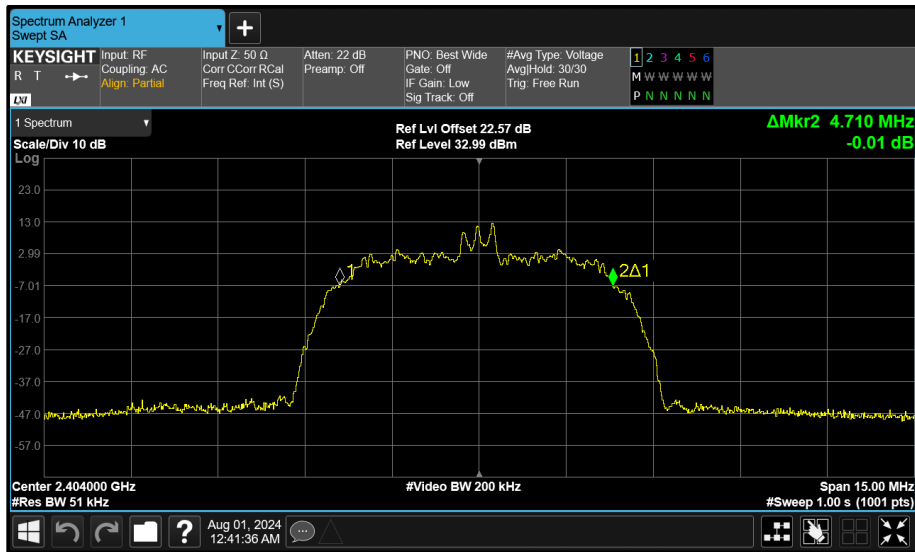


Figure 203 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

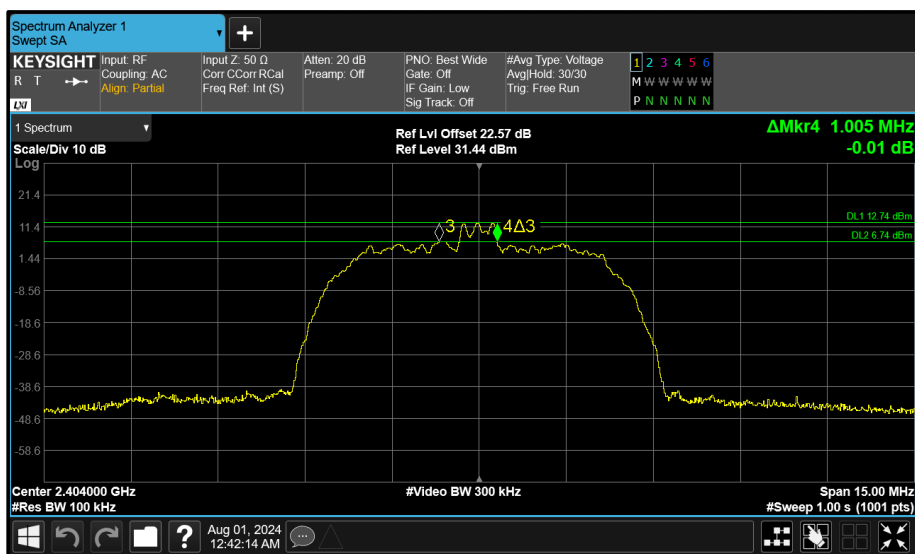


Figure 204 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth



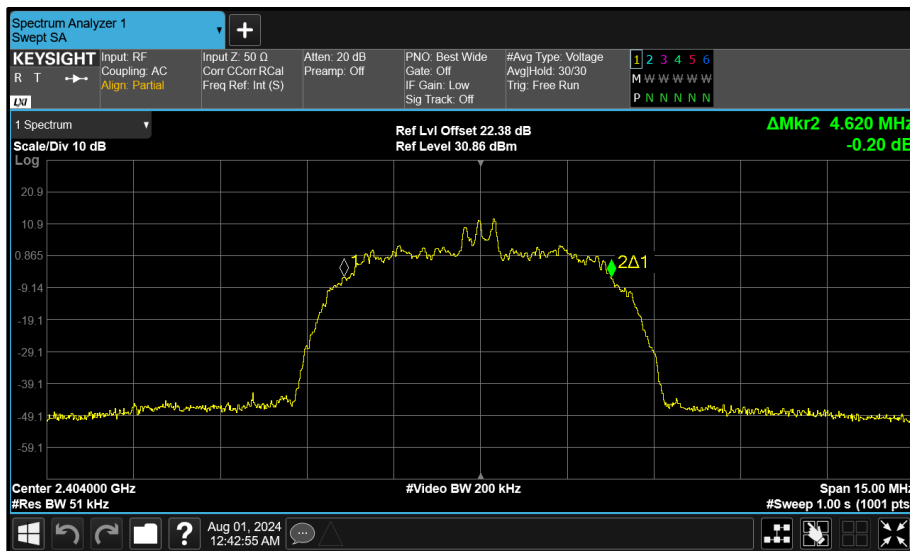


Figure 205 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

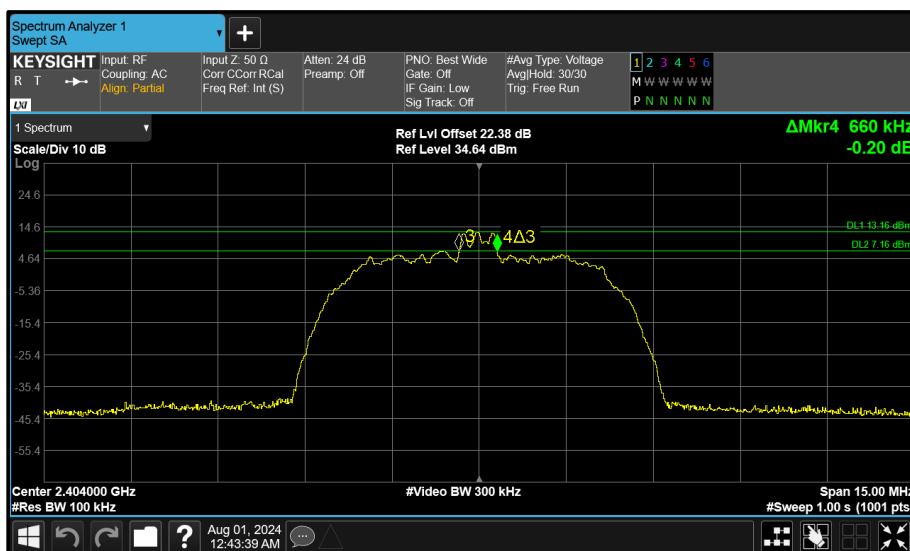


Figure 206 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

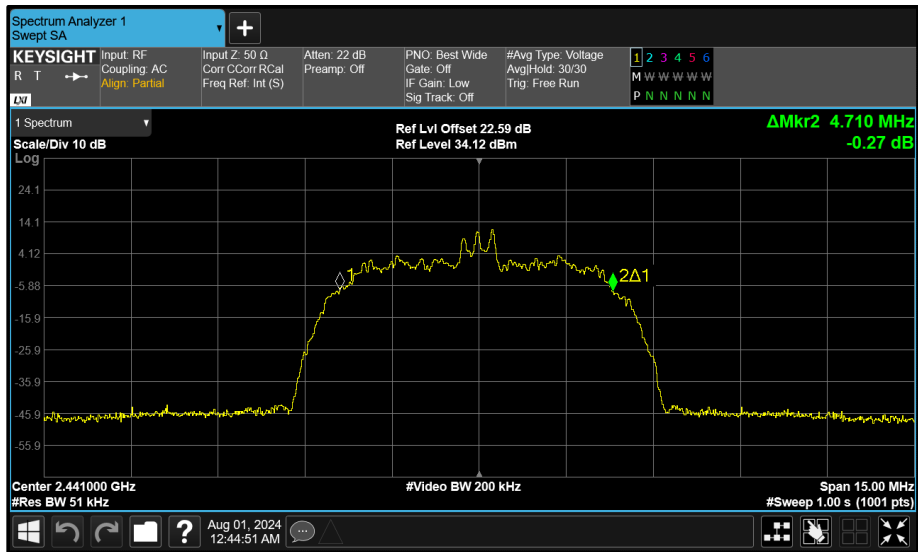


Figure 207 - Core 0 (A) 2441 MHz (CH39) 99% Bandwidth

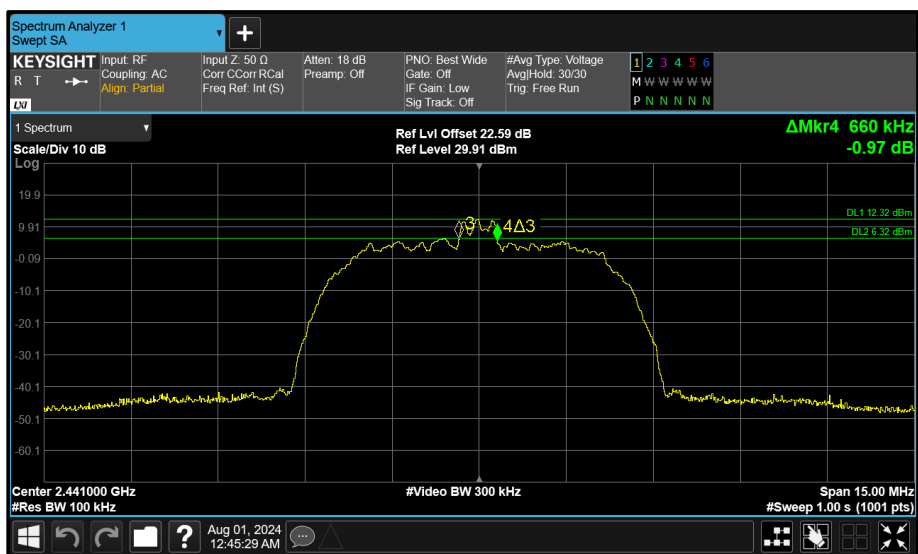


Figure 208 - Core 0 (A) 2441 MHz (CH39) 6 dB Bandwidth

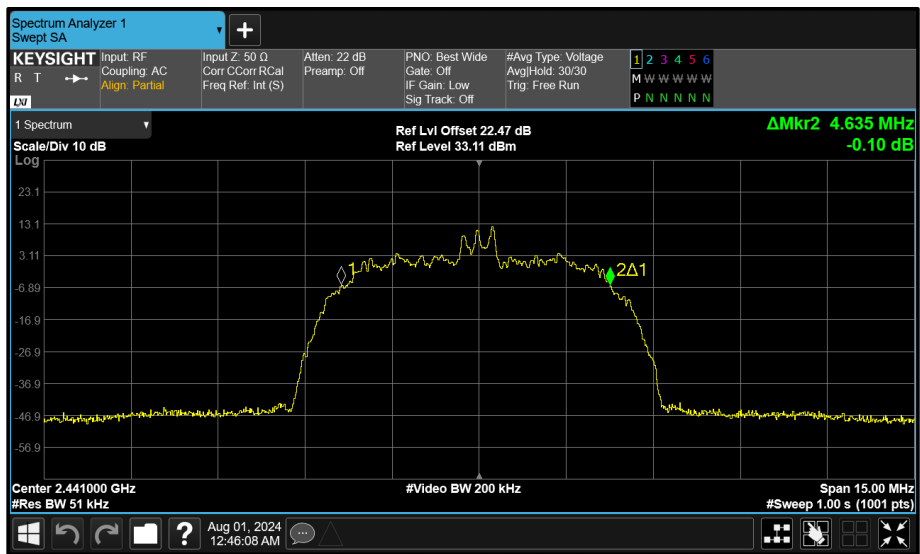


Figure 209 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

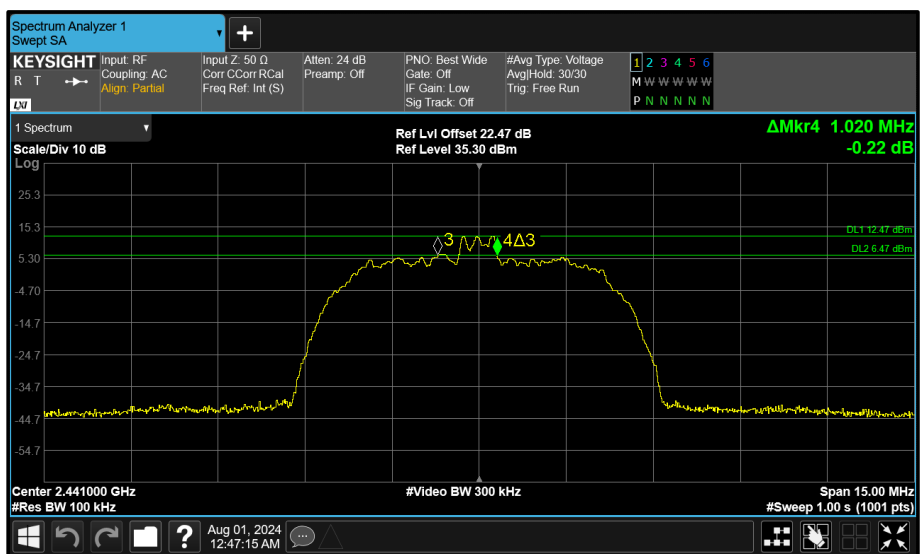


Figure 210 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

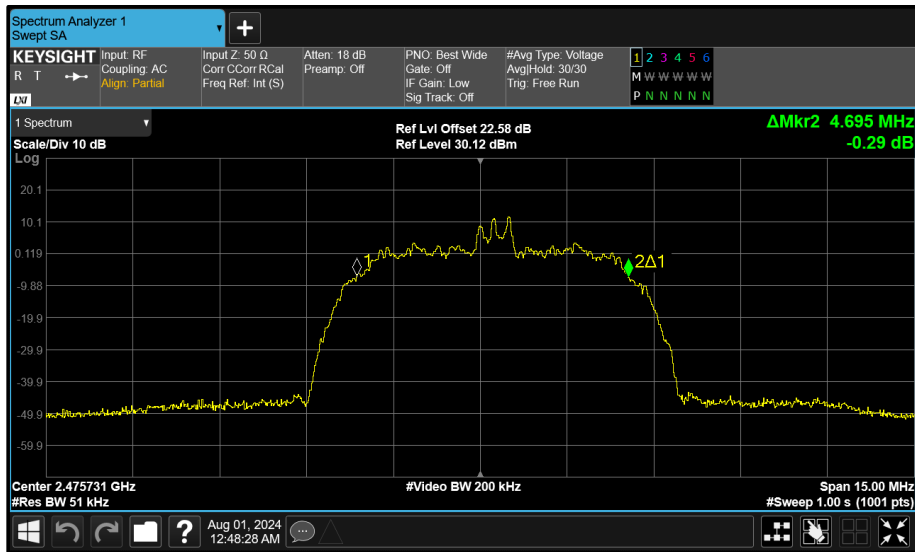


Figure 211 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

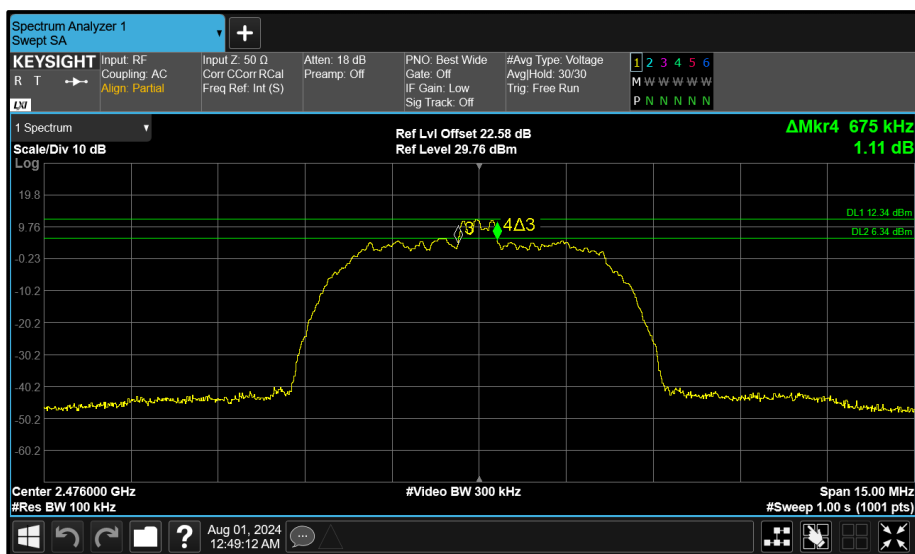


Figure 212 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth

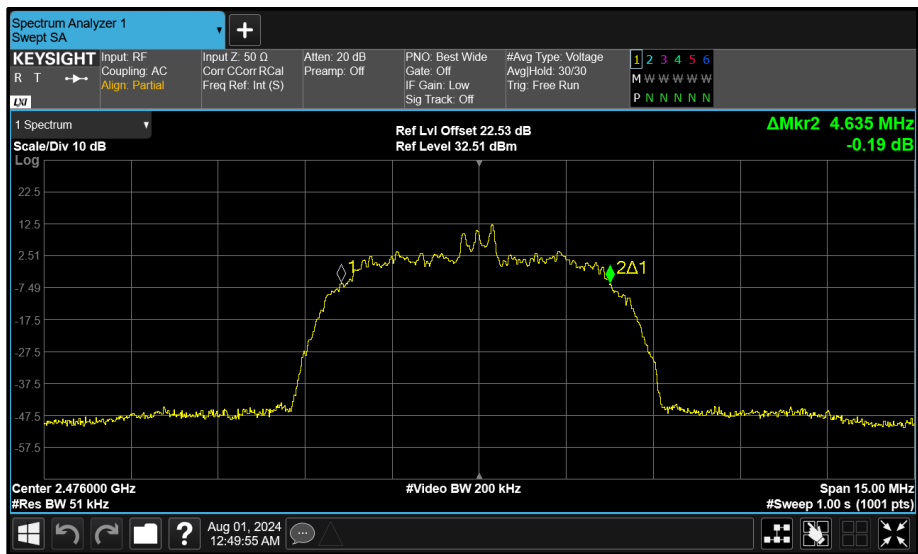


Figure 213 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

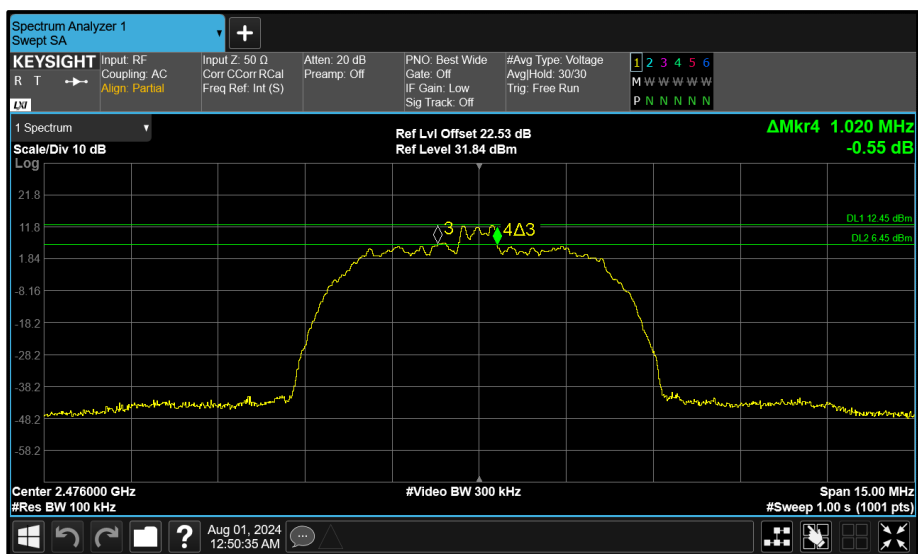


Figure 214 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	0.728	0.728	-	-	≥500.0
2440	0.696	0.728	-	-	≥500.0
2480	0.680	0.724	-	-	≥500.0

**Table 53 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.036	1.040	-	-	-
2440	1.036	1.040	-	-	-
2480	1.040	1.040	-	-	-

**Table 54 - 99% Bandwidth Results**

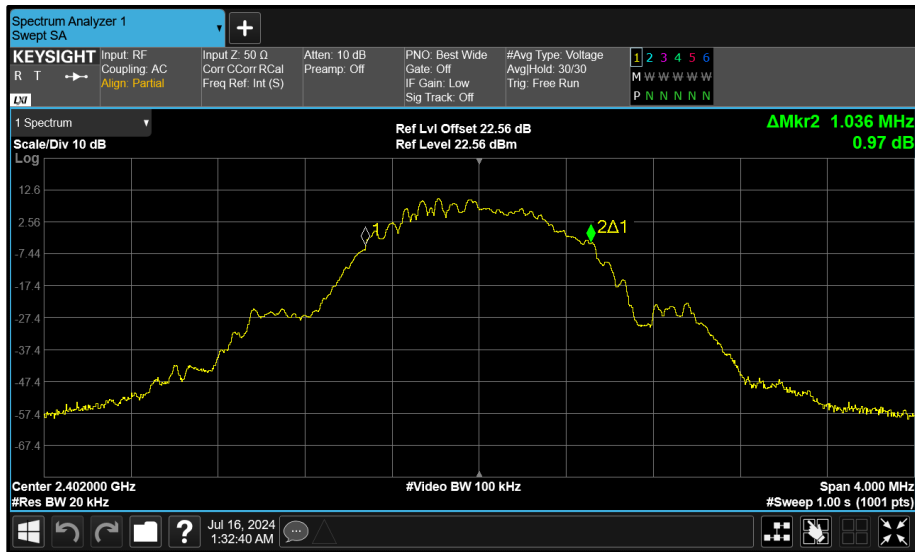


Figure 215 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

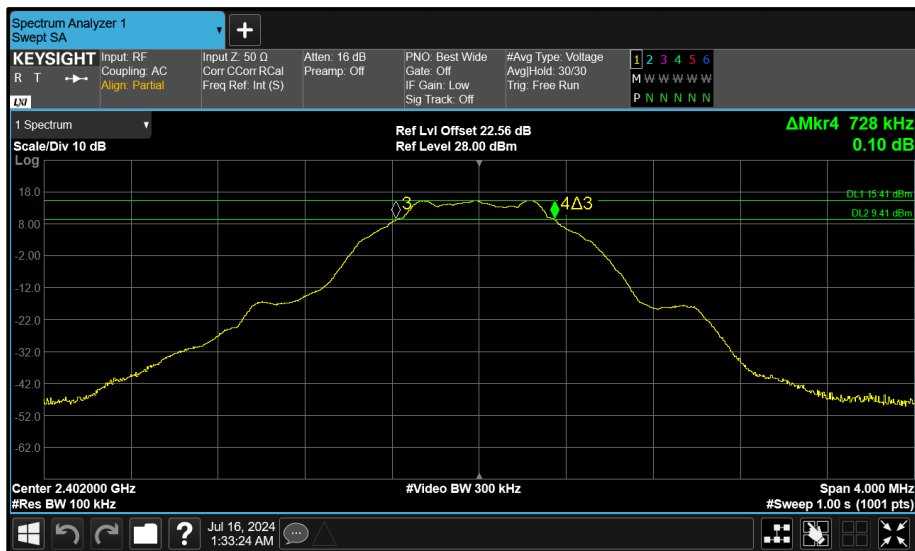


Figure 216 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

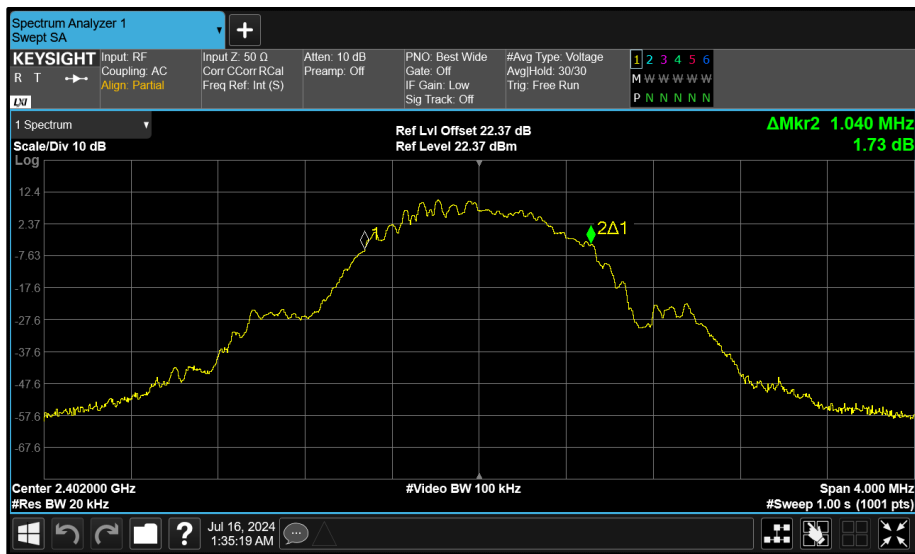


Figure 217 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

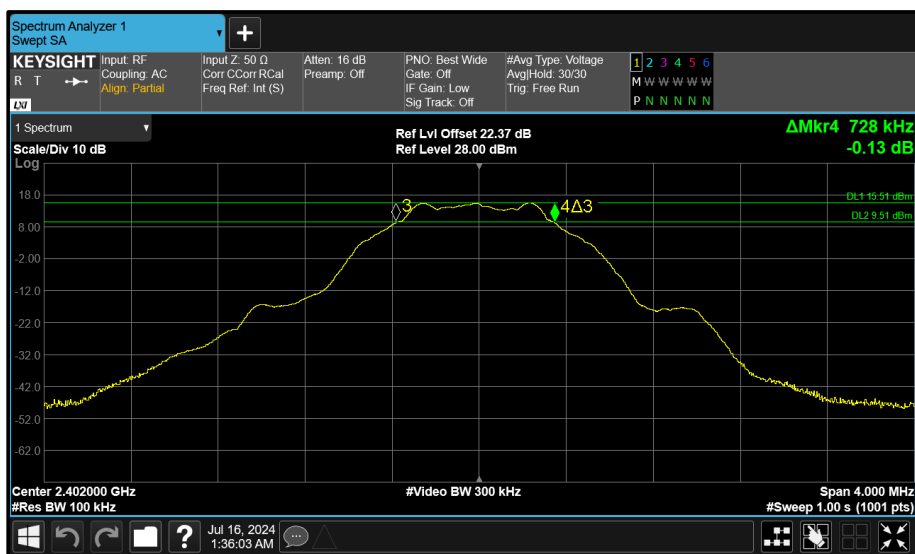


Figure 218 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth



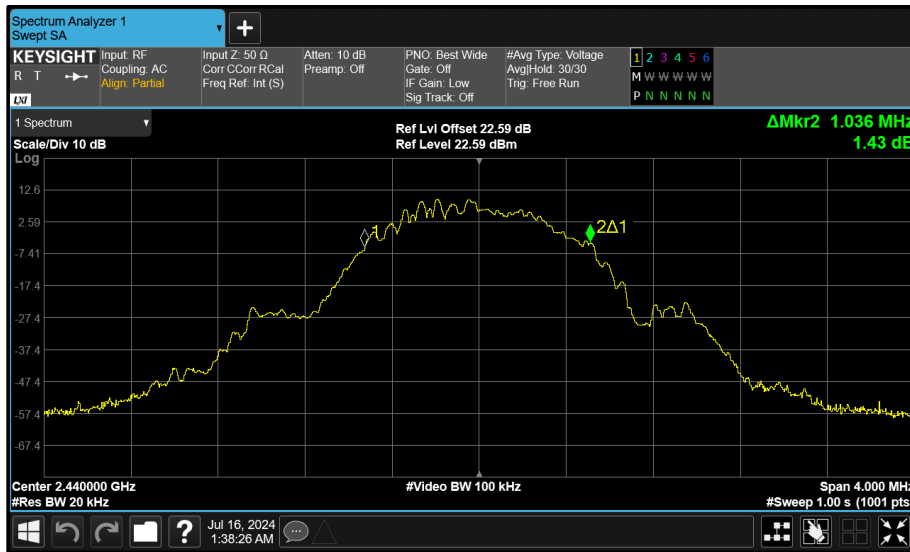


Figure 219 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

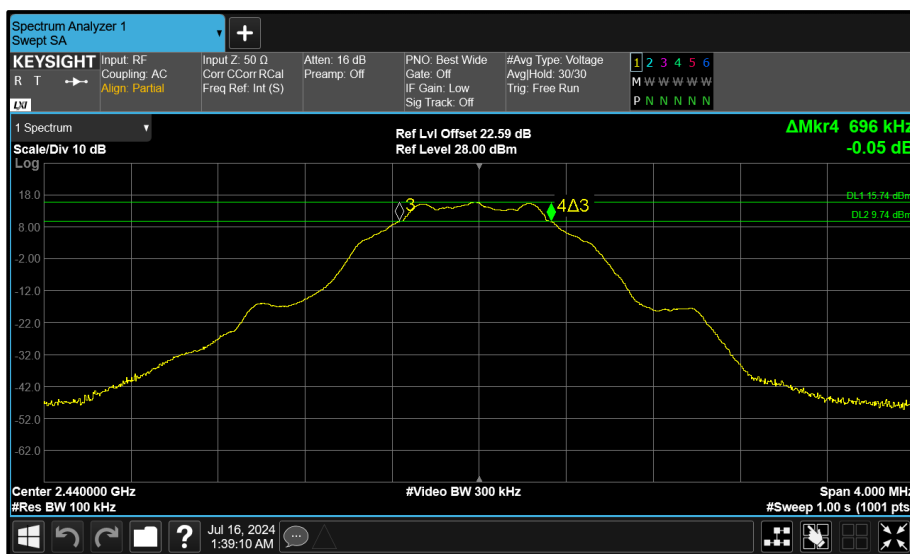


Figure 220 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth

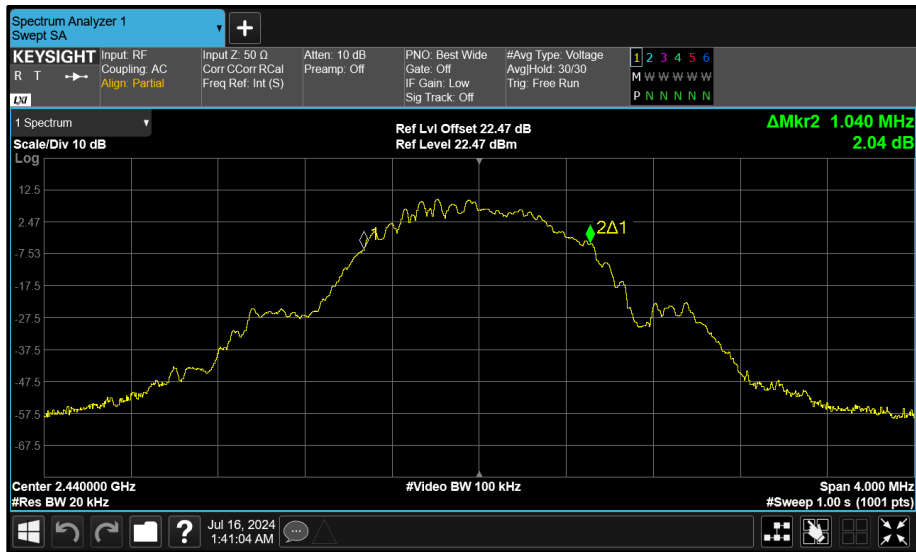


Figure 221 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

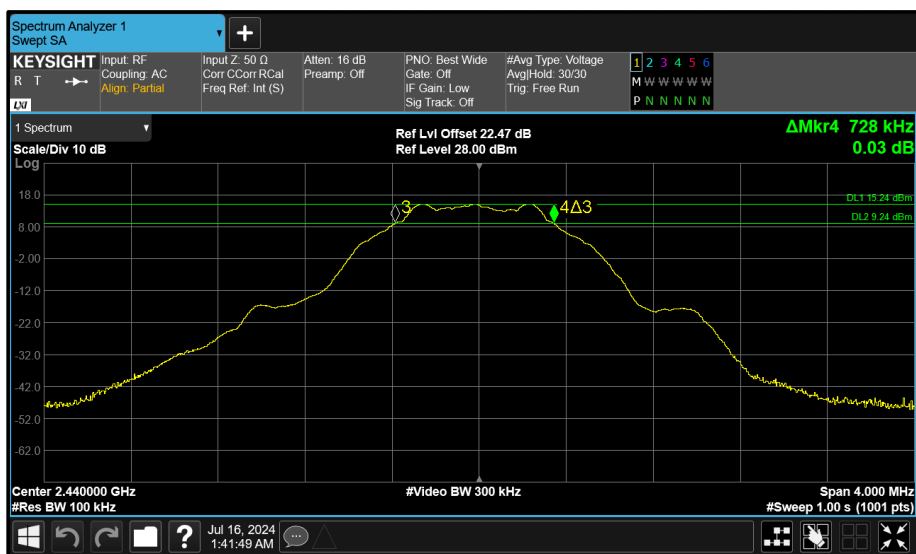


Figure 222 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

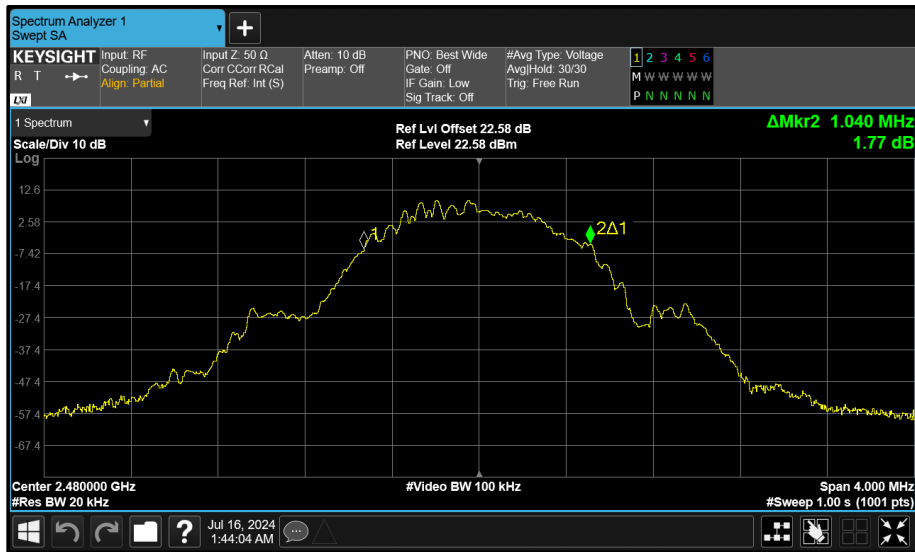


Figure 223 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

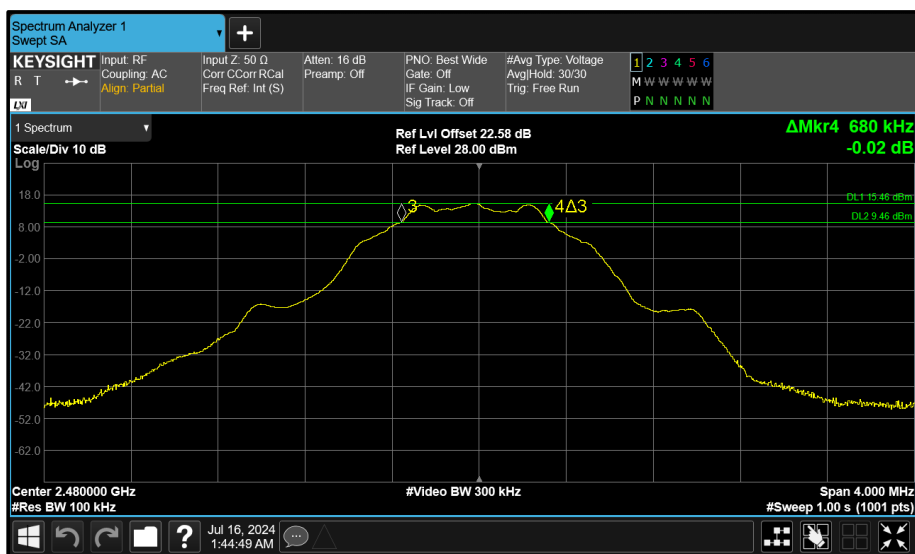


Figure 224 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth

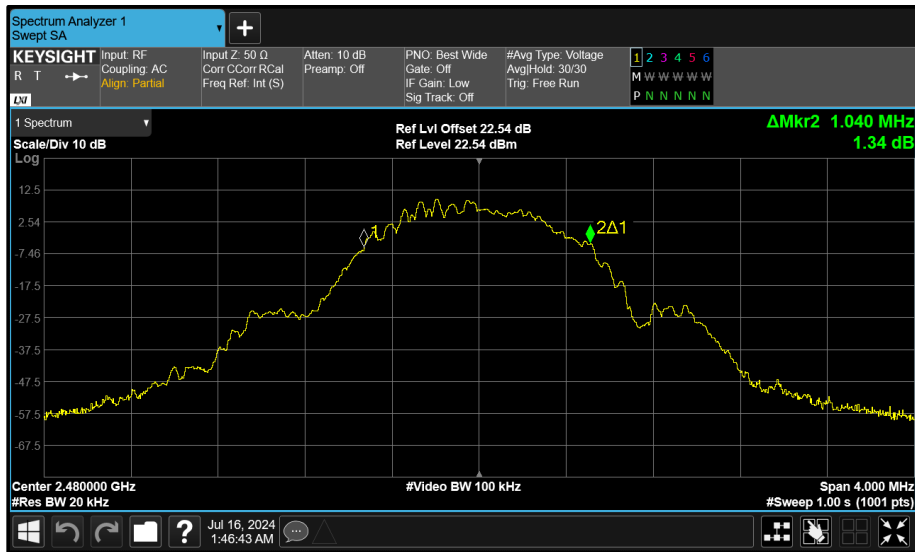


Figure 225 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

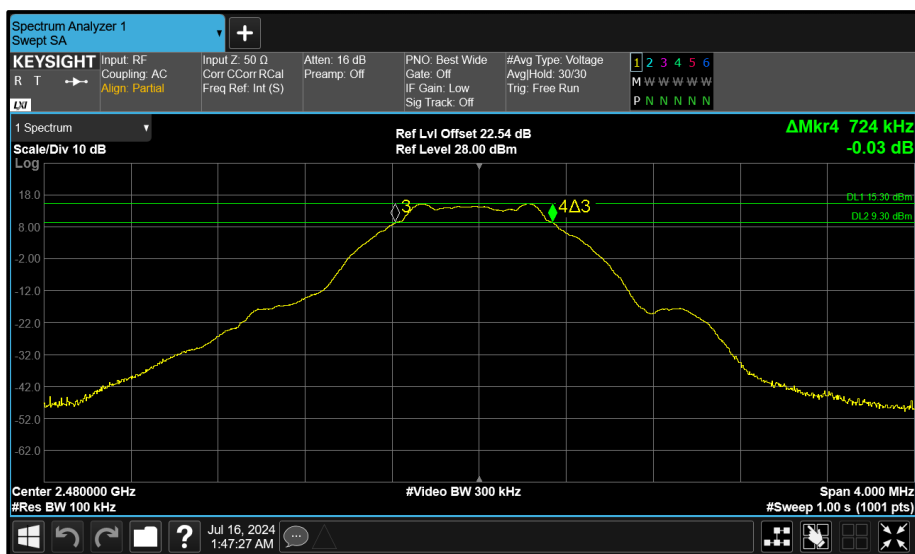


Figure 226 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 2M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.160	1.136	-	-	≥500.0
2440	1.160	1.248	-	-	≥500.0
2480	1.160	1.360	-	-	≥500.0

**Table 55 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	2.088	2.088	-	-	-
2440	2.088	2.088	-	-	-
2480	2.096	2.088	-	-	-

**Table 56 - 99% Bandwidth Results**

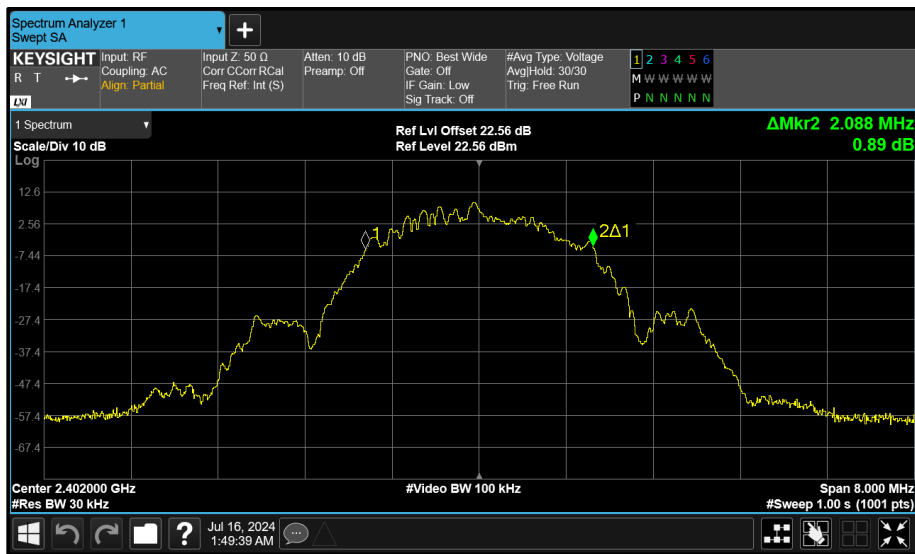


Figure 227 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

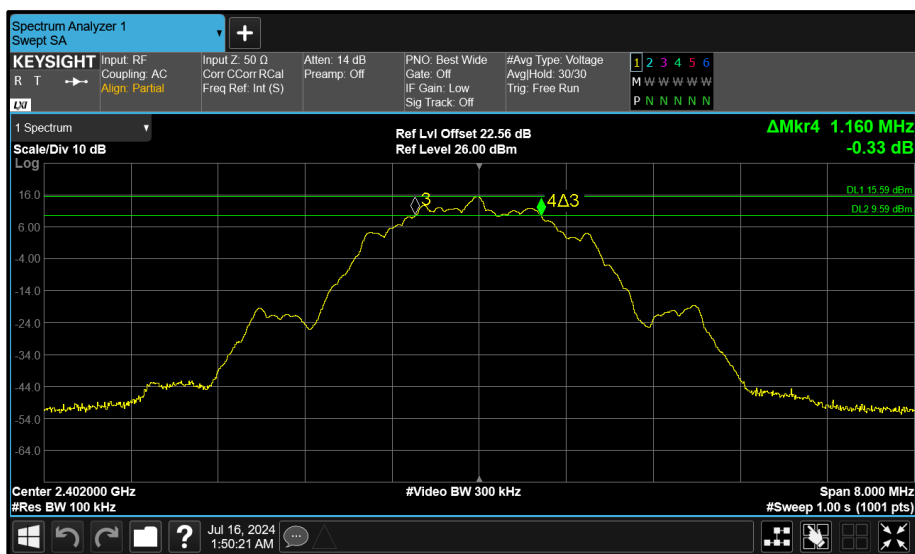


Figure 228 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

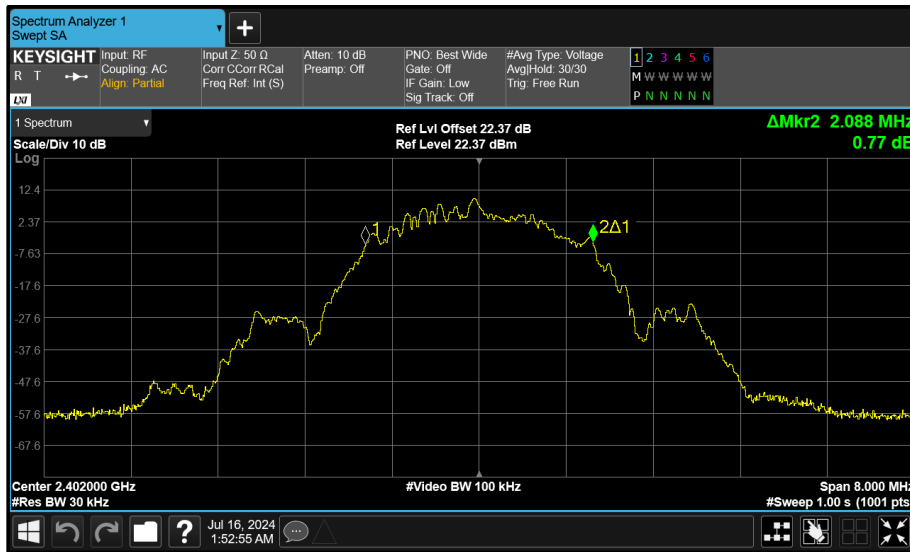


Figure 229 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

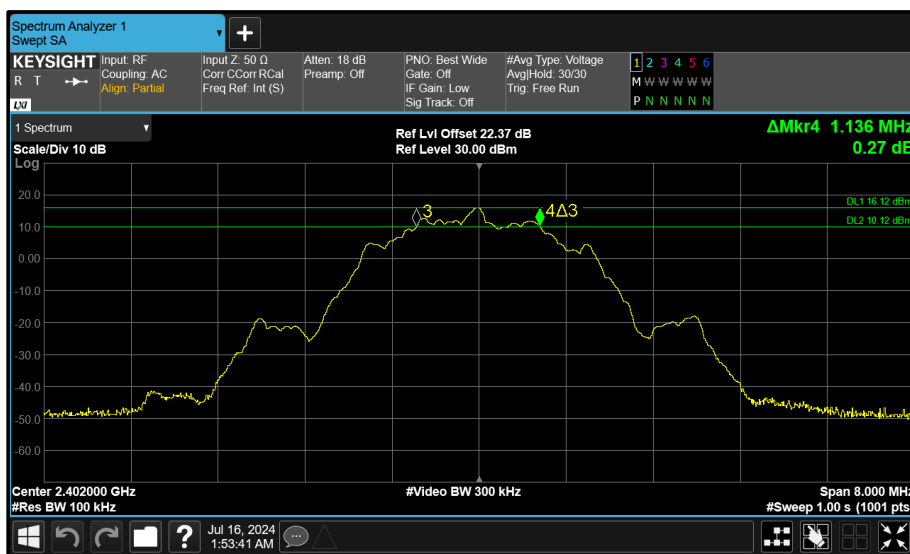


Figure 230 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

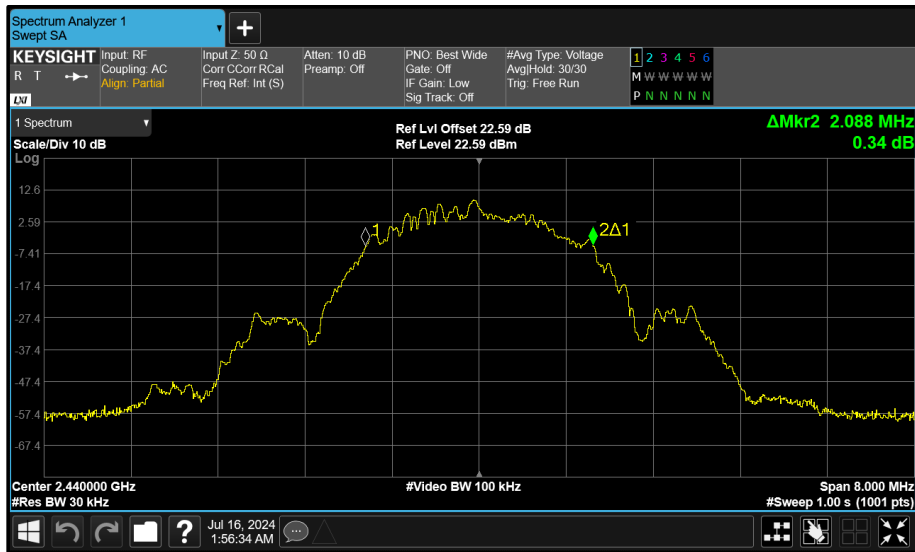


Figure 231 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

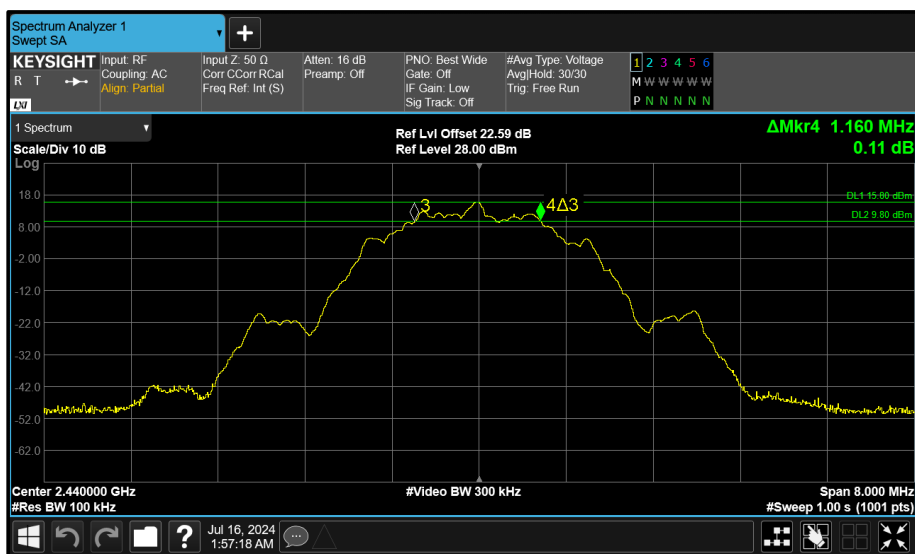


Figure 232 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth



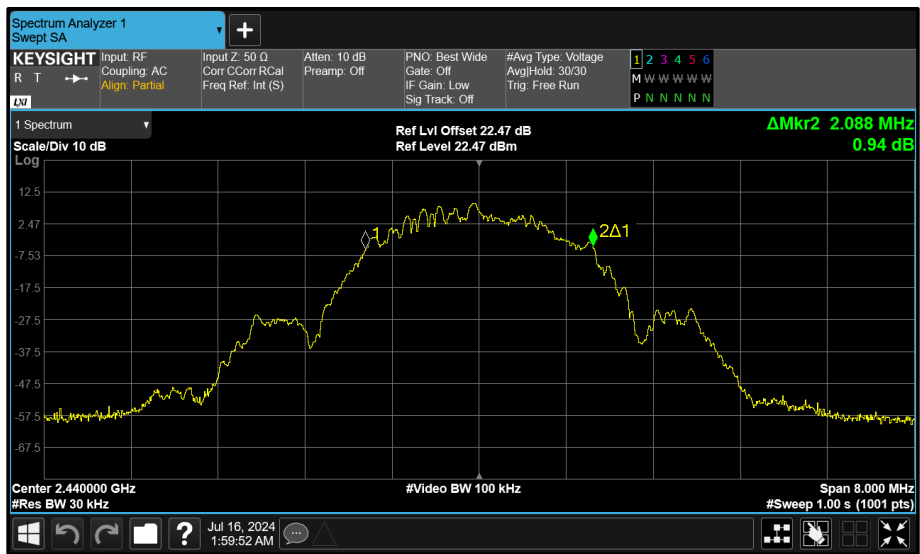


Figure 233 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

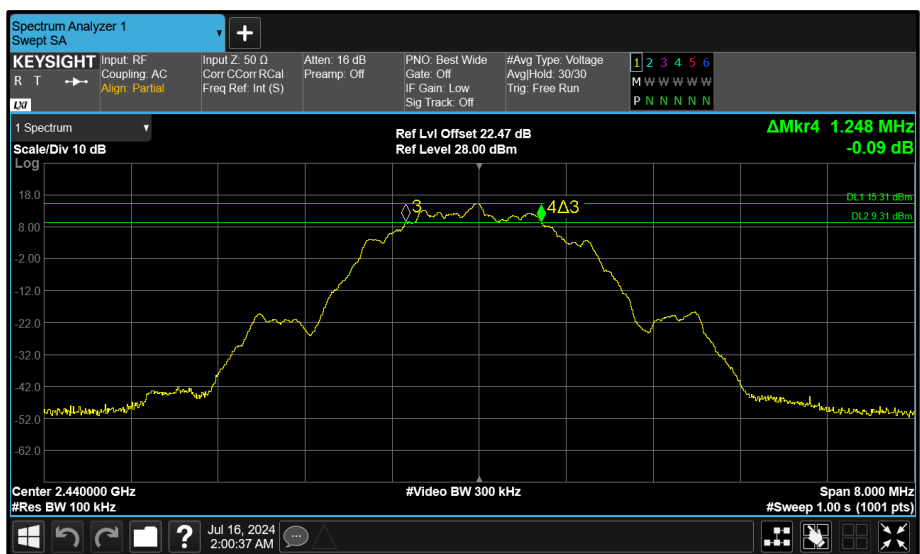


Figure 234 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

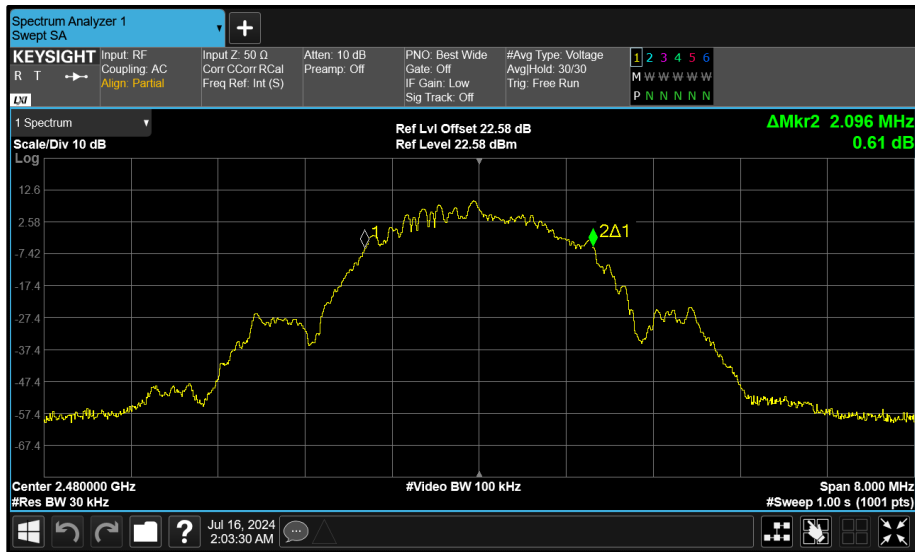


Figure 235 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

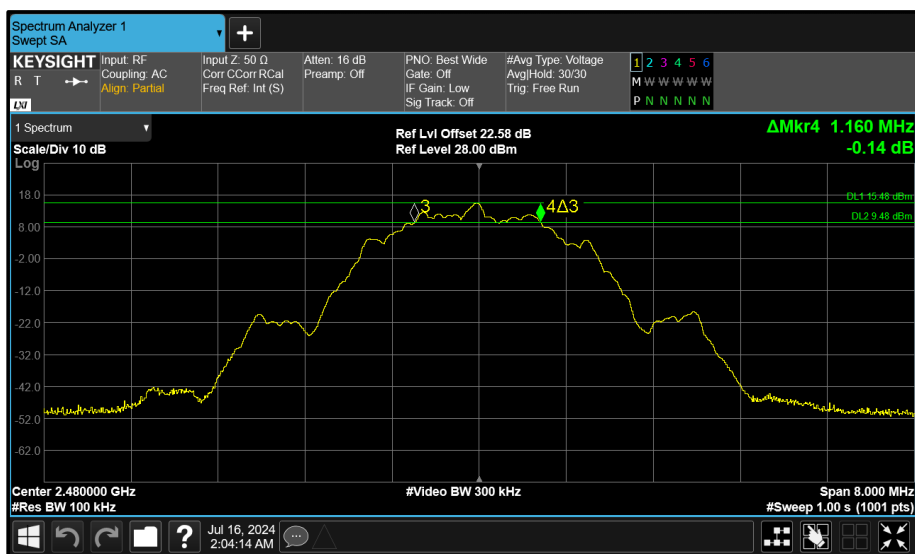


Figure 236 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth

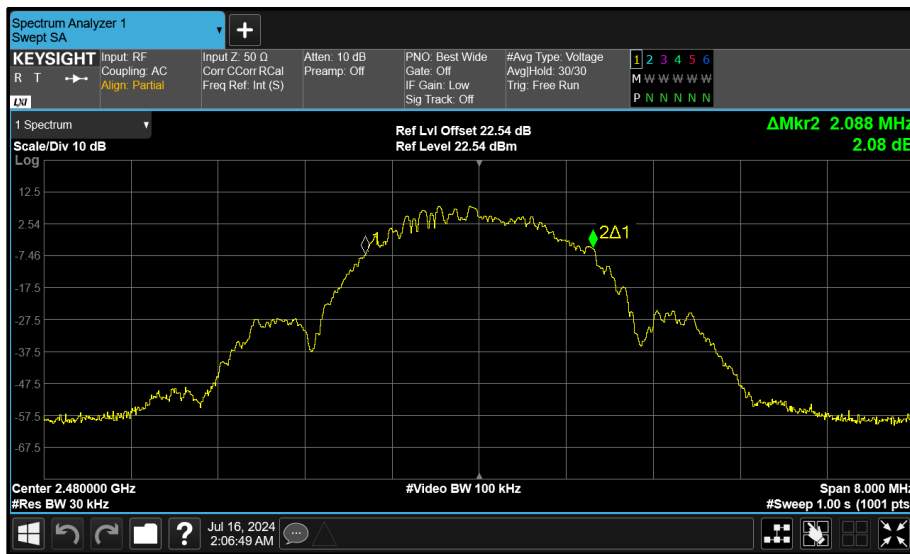


Figure 237 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

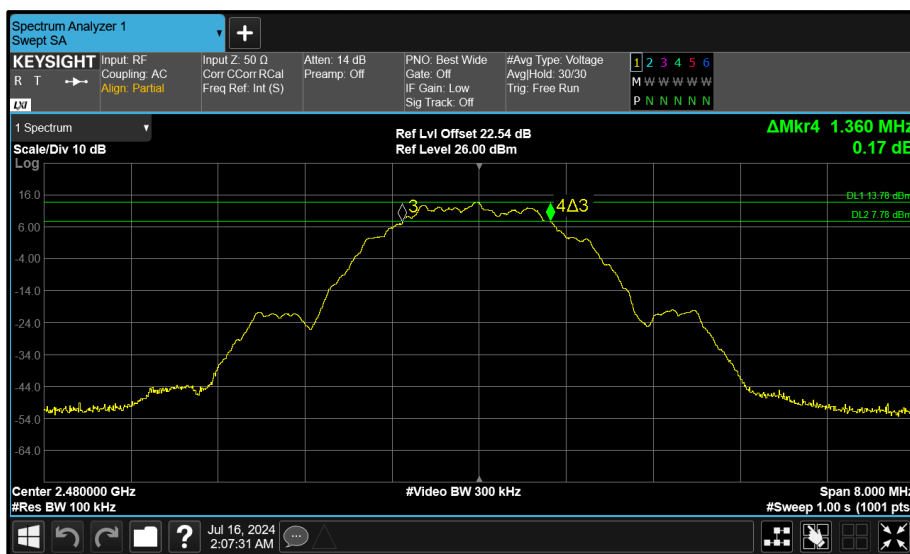


Figure 238 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and ISED RSS-247, Clause 5.2(a)

The minimum 6 dB Bandwidth shall be at least 500 kHz.



**2.2.7 Test Location and Test Equipment Used**

This test was carried out in RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	22-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

**Table 57**

O/P Mon - Output Monitored using calibrated equipment



## **2.3 Maximum Conducted Output Power**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (b)  
ISED RSS-247, Clause 5.4  
ISED RSS-GEN, Clause 6.12

### **2.3.2 Equipment Under Test and Modification State**

A3112, S/N: J6HWQT92RK - Modification State 0  
A3112, S/N: DQHQ6Q99MH - Modification State 0

### **2.3.3 Date of Test**

15-July-2024 to 01-August-2024

### **2.3.4 Test Method**

The test was performed in accordance with ANSI C63.10 clause 11.9.1.2 Method PKPM1.

MIMO output port summing was performed in accordance with KDB 662911 D01. Directional Gain was calculated in accordance with clause F)2)f)(ii) using the calculations from F)2)f)(i) with worst-case individual gain and an array gain of zero.

### **2.3.5 Environmental Conditions**

Ambient Temperature	21.9 - 23.1 °C
Relative Humidity	47.5 - 56.5 %



**2.3.6 Test Results**

2.4 GHz Bluetooth LE/HDR

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.60

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	9.65	-	-	-	-	30.00	-20.35
2441	9.43	-	-	-	-	30.00	-20.57
2476	9.36	-	-	-	-	30.00	-20.64

**Table 58 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	9.65	-	-	-	-	30.00	-20.35	14.25	36.00	-21.75
2441	9.43	-	-	-	-	30.00	-20.57	14.03	36.00	-21.97
2476	9.36	-	-	-	-	30.00	-20.64	13.96	36.00	-22.04

**Table 59 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.30

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	-	-	9.35	-	-	30.00	-20.65
2441	-	-	9.38	-	-	30.00	-20.62
2476	-	-	9.40	-	-	30.00	-20.60

**Table 60 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	-	-	9.35	-	-	30.00	-20.65	13.65	36.00	-22.35
2441	-	-	9.38	-	-	30.00	-20.62	13.68	36.00	-22.32
2476	-	-	9.40	-	-	30.00	-20.60	13.70	36.00	-22.30

**Table 61 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.60

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	9.59	-	-	-	-	30.00	-20.41
2441	9.88	-	-	-	-	30.00	-20.12
2476	9.74	-	-	-	-	30.00	-20.26

**Table 62 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	9.59	-	-	-	-	30.00	-20.41	14.19	36.00	-21.81
2441	9.88	-	-	-	-	30.00	-20.12	14.48	36.00	-21.52
2476	9.74	-	-	-	-	30.00	-20.26	14.34	36.00	-21.66

**Table 63 - ISED Maximum Conducted (peak) Output Power Results**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.30

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	-	-	9.59	-	-	30.00	-20.41
2441	-	-	9.36	-	-	30.00	-20.64
2476	-	-	9.58	-	-	30.00	-20.42

**Table 64 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	-	-	9.59	-	-	30.00	-20.41	13.89	36.00	-22.11
2441	-	-	9.36	-	-	30.00	-20.64	13.66	36.00	-22.34
2476	-	-	9.58	-	-	30.00	-20.42	13.88	36.00	-22.12

**Table 65 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.60

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	7.74	-	-	-	-	30.00	-22.26
2440	8.01	-	-	-	-	30.00	-21.99
2480	8.13	-	-	-	-	30.00	-21.87

**Table 66 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	7.74	-	-	-	-	30.00	-22.26	12.34	36.00	-23.66
2440	8.01	-	-	-	-	30.00	-21.99	12.61	36.00	-23.39
2480	8.13	-	-	-	-	30.00	-21.87	12.73	36.00	-23.27

**Table 67 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.30

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	8.22	-	-	30.00	-21.78
2440	-	-	7.98	-	-	30.00	-22.02
2480	-	-	8.55	-	-	30.00	-21.45

**Table 68 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	8.22	-	-	30.00	-21.78	12.52	36.00	-23.48
2440	-	-	7.98	-	-	30.00	-22.02	12.28	36.00	-23.72
2480	-	-	8.55	-	-	30.00	-21.45	12.85	36.00	-23.15

**Table 69 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.3
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.60

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	7.94	-	-	-	-	30.00	-22.06
2440	8.14	-	-	-	-	30.00	-21.86
2480	8.19	-	-	-	-	30.00	-21.81

**Table 70 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	7.94	-	-	-	-	30.00	-22.06	12.54	36.00	-23.46
2440	8.14	-	-	-	-	30.00	-21.86	12.74	36.00	-23.26
2480	8.19	-	-	-	-	30.00	-21.81	12.79	36.00	-23.21

**Table 71 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	4.30

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	8.36	-	-	30.00	-21.64
2440	-	-	8.08	-	-	30.00	-21.92
2480	-	-	8.21	-	-	30.00	-21.79

**Table 72 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	8.36	-	-	30.00	-21.64	12.66	36.00	-23.34
2440	-	-	8.08	-	-	30.00	-21.92	12.38	36.00	-23.62
2480	-	-	8.21	-	-	30.00	-21.79	12.51	36.00	-23.49

**Table 73 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.60

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	17.52	-	-	-	-	30.00	-12.48
2441	17.39	-	-	-	-	30.00	-12.61
2476	17.31	-	-	-	-	30.00	-12.69

**Table 74 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	17.52	-	-	-	-	30.00	-12.48	22.12	36.00	-13.88
2441	17.39	-	-	-	-	30.00	-12.61	21.99	36.00	-14.01
2476	17.31	-	-	-	-	30.00	-12.69	21.91	36.00	-14.09

**Table 75 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.60

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	16.09	-	-	-	-	30.00	-13.91
2441	16.32	-	-	-	-	30.00	-13.68
2476	16.22	-	-	-	-	30.00	-13.78

**Table 76 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	16.09	-	-	-	-	30.00	-13.91	20.69	36.00	-15.31
2441	16.32	-	-	-	-	30.00	-13.68	20.92	36.00	-15.08
2476	16.22	-	-	-	-	30.00	-13.78	20.82	36.00	-15.18

**Table 77 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	16.82	-	-	-	30.00	-13.18
2440	-	16.35	-	-	-	30.00	-13.65
2480	-	16.51	-	-	-	30.00	-13.49

**Table 78 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	16.82	-	-	-	30.00	-13.18	21.02	36.00	-14.98
2440	-	16.35	-	-	-	30.00	-13.65	20.55	36.00	-15.45
2480	-	16.51	-	-	-	30.00	-13.49	20.71	36.00	-15.29

**Table 79 - ISED Maximum Conducted (peak) Output Power Results**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	17.27	-	-	-	30.00	-12.73
2440	-	16.54	-	-	-	30.00	-13.46
2480	-	16.54	-	-	-	30.00	-13.46

**Table 80 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	17.27	-	-	-	30.00	-12.73	21.47	36.00	-14.53
2440	-	16.54	-	-	-	30.00	-13.46	20.74	36.00	-15.26
2480	-	16.54	-	-	-	30.00	-13.46	20.74	36.00	-15.26

**Table 81 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	9.50	9.58	-	-	12.49	28.59	-16.10
2441	9.62	9.58	-	-	12.56	28.59	-16.02
2476	9.44	9.29	-	-	12.31	28.59	-16.28

**Table 82 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	9.50	9.58	-	-	12.49	30.00	-17.51	19.90	36.00	-16.10
2441	9.62	9.58	-	-	12.56	30.00	-17.44	19.98	36.00	-16.02
2476	9.44	9.29	-	-	12.31	30.00	-17.69	19.72	36.00	-16.28

**Table 83 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	9.45	9.23	-	-	12.31	28.59	-16.27
2441	9.50	9.26	-	-	12.35	28.59	-16.24
2476	9.78	9.35	-	-	12.54	28.59	-16.05

**Table 84 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	9.45	9.23	-	-	12.31	30.00	-17.69	19.73	36.00	-16.27
2441	9.50	9.26	-	-	12.35	30.00	-17.65	19.76	36.00	-16.24
2476	9.78	9.35	-	-	12.54	30.00	-17.46	19.95	36.00	-16.05

**Table 85 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.5
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	7.74	8.49	-	-	11.12	28.59	-17.46
2440	8.03	8.19	-	-	11.09	28.59	-17.49
2480	8.07	7.95	-	-	10.97	28.59	-17.62

**Table 86 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	7.74	8.49	-	-	11.12	30.00	-18.88	18.54	36.00	-17.46
2440	8.03	8.19	-	-	11.09	30.00	-18.91	18.51	36.00	-17.49
2480	8.07	7.95	-	-	10.97	30.00	-19.03	18.38	36.00	-17.62

**Table 87 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.3
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	7.93	8.36	-	-	11.11	28.59	-17.48
2440	8.31	8.42	-	-	11.36	28.59	-17.22
2480	8.31	8.01	-	-	11.14	28.59	-17.45

**Table 88 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	7.93	8.36	-	-	11.11	30.00	-18.89	18.52	36.00	-17.48
2440	8.31	8.42	-	-	11.36	30.00	-18.64	18.78	36.00	-17.22
2480	8.31	8.01	-	-	11.14	30.00	-18.86	18.55	36.00	-17.45

**Table 89 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	17.32	17.27	-	-	20.29	28.59	-8.30
2441	17.46	17.37	-	-	20.40	28.59	-8.19
2476	17.33	17.44	-	-	20.35	28.59	-8.23

**Table 90 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	17.32	17.27	-	-	20.29	30.00	-9.71	27.70	36.00	-8.30
2441	17.46	17.37	-	-	20.40	30.00	-9.60	27.81	36.00	-8.19
2476	17.33	17.44	-	-	20.35	30.00	-9.65	27.77	36.00	-8.23

**Table 91 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	$\Sigma$		
2404	16.21	16.09	-	-	19.11	28.59	-9.48
2441	15.86	16.06	-	-	18.97	28.59	-9.62
2476	15.92	15.84	-	-	18.85	28.59	-9.74

**Table 92 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	$\Sigma$					
2404	16.21	16.09	-	-	19.11	30.00	-10.89	26.52	36.00	-9.48
2441	15.86	16.06	-	-	18.97	30.00	-11.03	26.38	36.00	-9.62
2476	15.92	15.84	-	-	18.85	30.00	-11.15	26.26	36.00	-9.74

**Table 93 - ISED Maximum Conducted (peak) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.75	16.87	-	-	19.76	28.59	-8.83
2440	17.01	16.35	-	-	19.68	28.59	-8.91
2480	16.85	16.05	-	-	19.46	28.59	-9.12

**Table 94 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	16.75	16.87	-	-	19.76	30.00	-10.24	27.17	36.00	-8.83
2440	17.01	16.35	-	-	19.68	30.00	-10.32	27.09	36.00	-8.91
2480	16.85	16.05	-	-	19.46	30.00	-10.54	26.88	36.00	-9.12

**Table 95 - ISED Maximum Conducted (peak) Output Power Results**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	7.41

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.84	17.22	-	-	20.02	28.59	-8.57
2440	17.19	16.70	-	-	19.93	28.59	-8.66
2480	16.98	16.41	-	-	19.68	28.59	-8.91

**Table 96 - FCC Maximum Conducted (peak) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	16.84	17.22	-	-	20.02	30.00	-9.98	27.43	36.00	-8.57
2440	17.19	16.70	-	-	19.93	30.00	-10.07	27.34	36.00	-8.66
2480	16.98	16.41	-	-	19.68	30.00	-10.32	27.09	36.00	-8.91

**Table 97 - ISED Maximum Conducted (peak) Output Power Results**

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISED RSS-247, Limit Clause 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.



**2.3.7 Test Location and Test Equipment Used**

This test was carried out in RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	22-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6590	12	20-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

**Table 98**

O/P Mon - Output Monitored using calibrated equipment



## **2.4 Authorised Band Edges**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d)  
ISED RSS-247, Clause 5.5

### **2.4.2 Equipment Under Test and Modification State**

A3112, S/N: K67X45QH3Q - Modification State 0  
A3112, S/N: MNV254CLPF - Modification State 0

### **2.4.3 Date of Test**

11-June-2024 to 17-June-2024

### **2.4.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

### **2.4.5 Environmental Conditions**

Ambient Temperature	22.1 - 24.2 °C
Relative Humidity	37.0 - 46.5 %




**2.4.6 Test Results**

2.4 GHz Bluetooth LE/HDR


iPA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-54.84
Static	HDR8	2404	2400	-47.74
Static	LE1M	2402	2400	-63.22
Static	LE2M	2402	2400	-34.65


**Table 99 - SISO Authorised Band Edge Results**

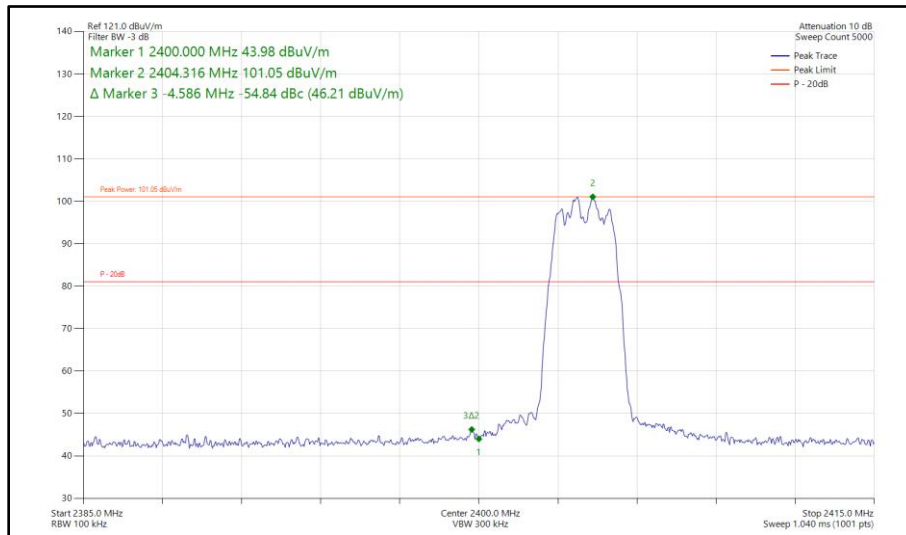


**Figure 239 - Bluetooth HDR4, SISO, Core 0 - 2404 MHz  
 Band Edge Frequency 2400 MHz**

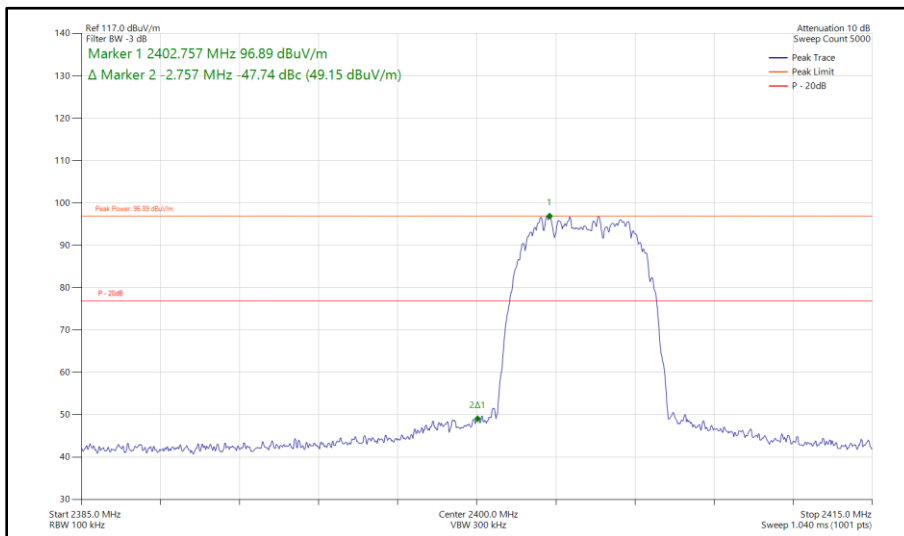

**Figure 240 - Bluetooth HDR8, SISO, Core 0 - 2404 MHz  
Band Edge Frequency 2400 MHz**

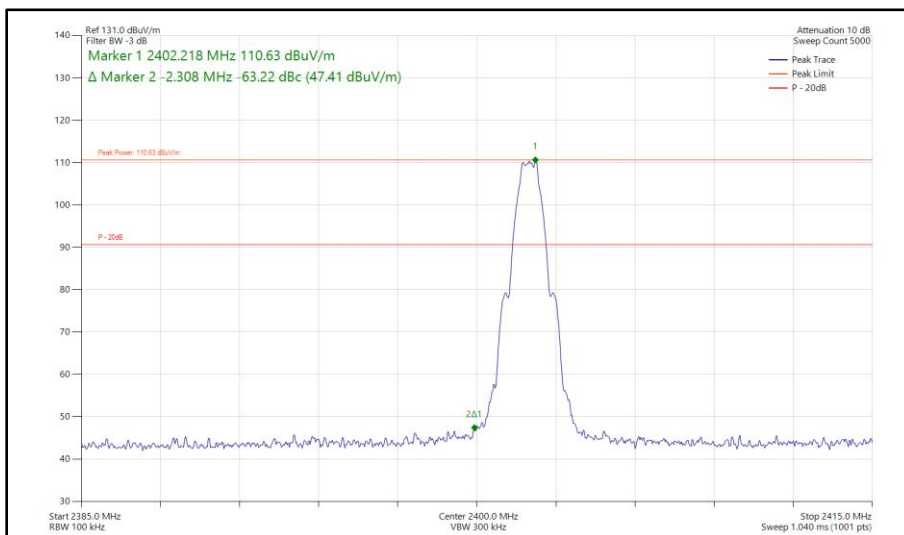

**Figure 241 - Bluetooth LE1M, SISO, Core 0 - 2402 MHz  
Band Edge Frequency 2400 MHz**

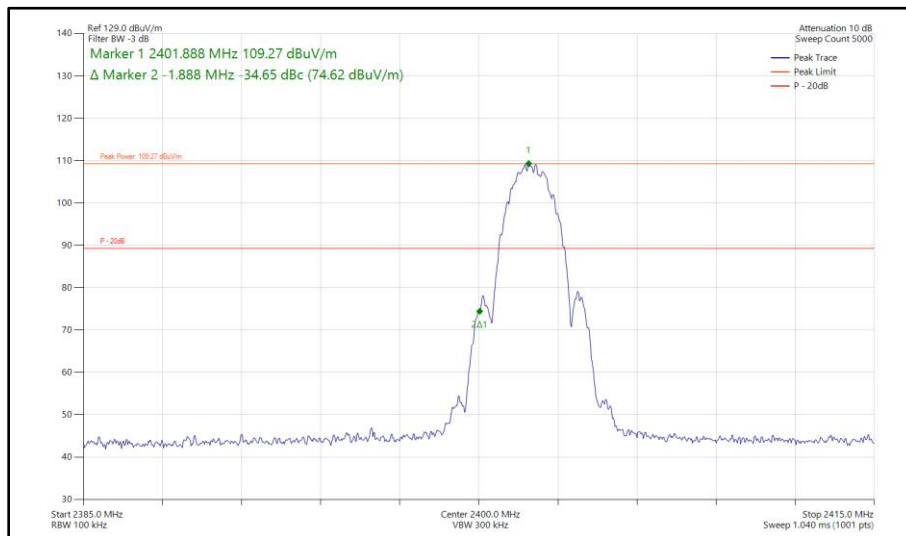

**Figure 242 - Bluetooth LE2M, SISO, Core 0 - 2402 MHz  
Band Edge Frequency 2400 MHz**



iPA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-54.49
Static	HDR8	2404	2400	-47.82
Static	LE1M	2402	2400	-63.48
Static	LE2M	2402	2400	-34.81

Table 100 - SISO Authorised Band Edge Results

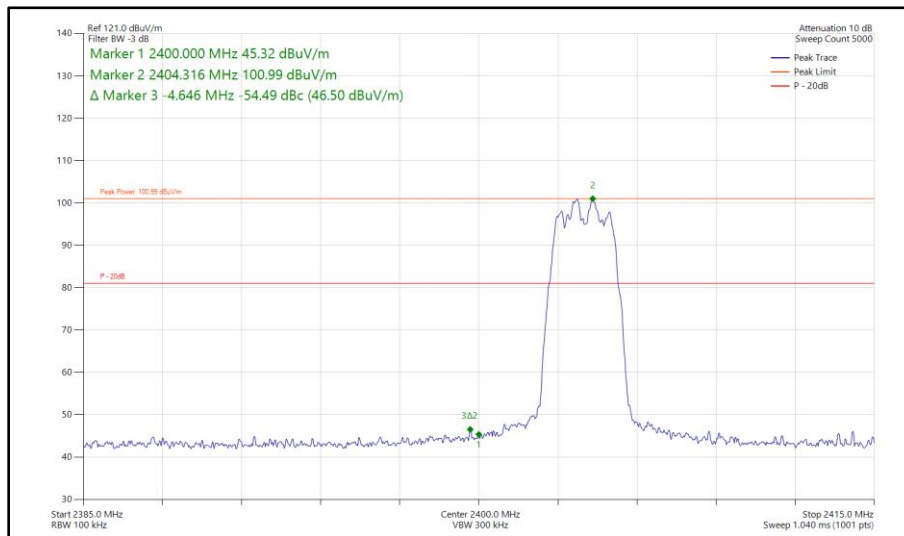


Figure 243 - Bluetooth HDR4, SISO, Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz



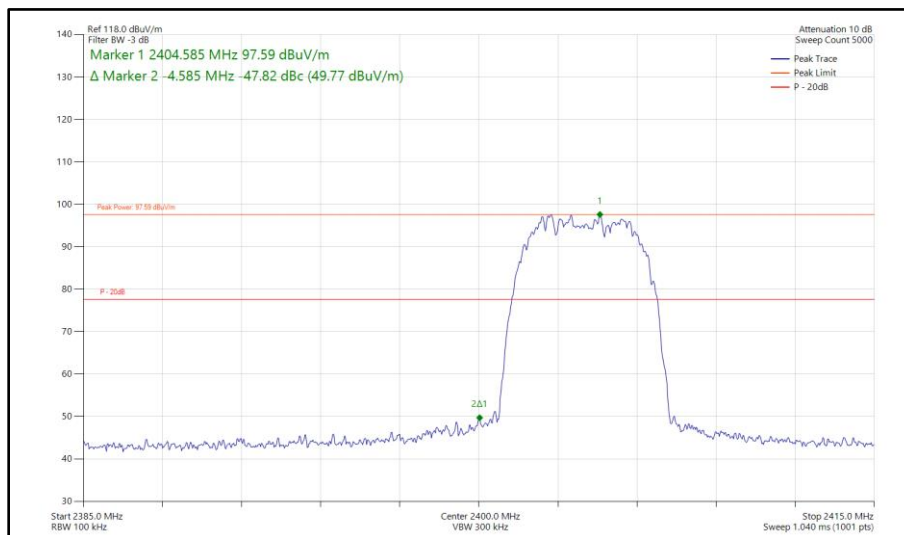


Figure 244 - Bluetooth HDR8, SISO, Core 1 - 2404 MHz  
 Band Edge Frequency 2400 MHz

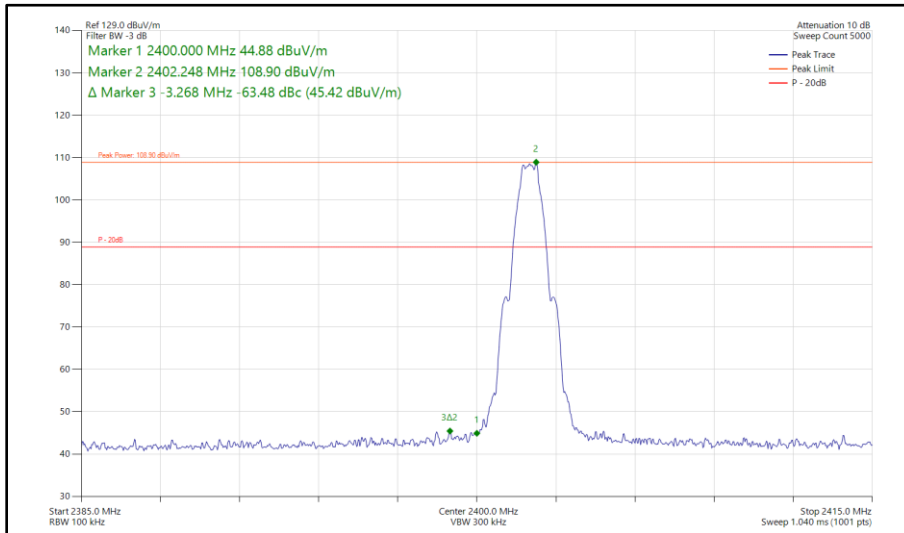

**Figure 245 - Bluetooth LE1M, SISO, Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz**

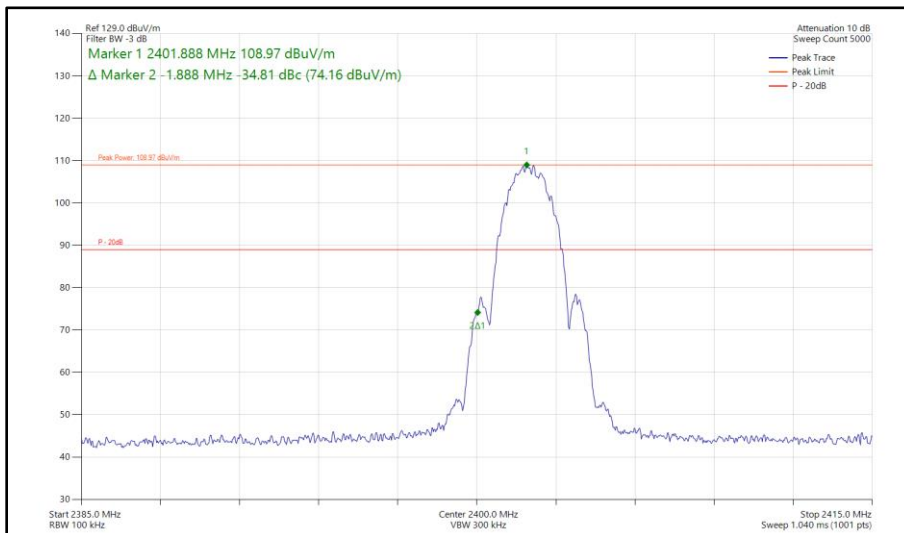

**Figure 246 - Bluetooth LE2M, SISO, Core 1 - 2402 MHz  
Band Edge Frequency 2400 MHz**





iPA - Core 2 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	HDR4	2404	2400	-56.85
Static	HDR8	2404	2400	-40.79
Static	LE1M	2402	2400	-58.79
Static	LE2M	2402	2400	-30.11

Table 101 - SISO Authorised Band Edge Results

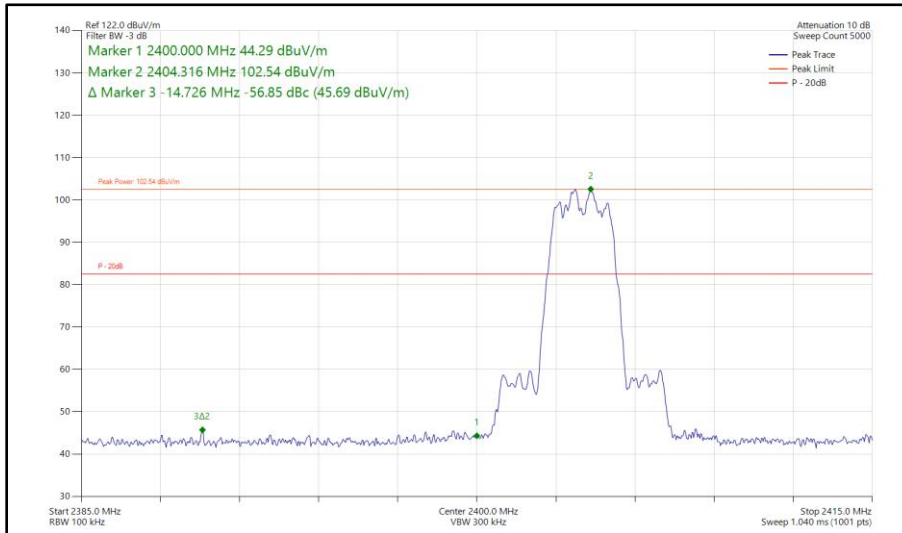


Figure 247 - Bluetooth HDR4, SISO, Core 2 - 2404 MHz  
 Band Edge Frequency 2400 MHz

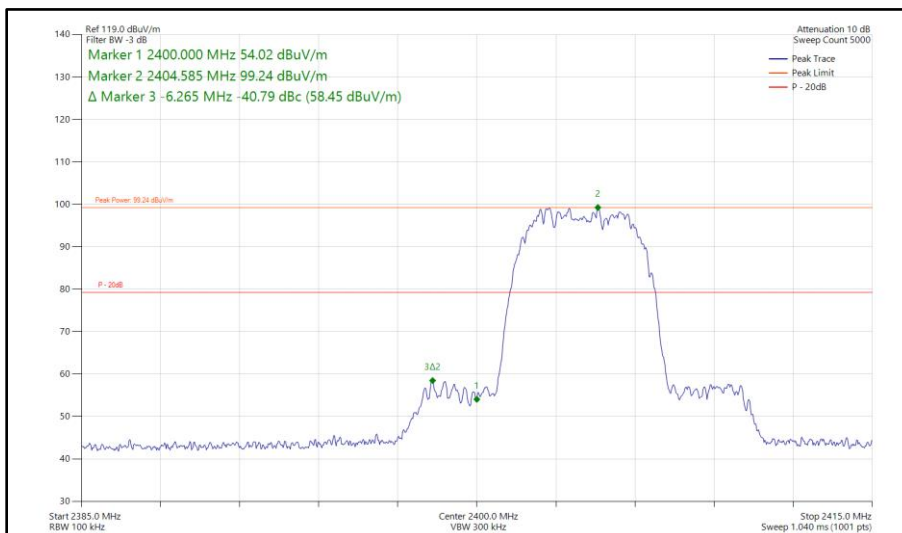


Figure 248 - Bluetooth HDR8, SISO, Core 2 - 2404 MHz  
 Band Edge Frequency 2400 MHz