

FCC and ISED Test Report

Apple Inc
Model: A3114

In accordance with FCC 47 CFR Part 15E, ISED
RSS-248 and ISED RSS-GEN
(6 GHz WLAN)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA



Add value.
Inspire trust.

TUV SUD Digitally signed by TUV SUD
Date: 2023.12.08 13:44:35 Z

FCC ID: BCGA3114

IC: 579C-A3114

COMMERCIAL-IN-CONFIDENCE

Document 75959606-10 Issue 01

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steven White	Senior Technical Specialist	Authorised Signatory	08 December 2023

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E, ISED RSS-248 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Lauren Walters	08 December 2023	

FCC Accreditation

553713/UK2026 Concorde Park, Fareham Test Laboratory

ISED Accreditation

28798 Concorde Park, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15E: 2021, ISED RSS-248: Issue 2 (2022-12) and ISED RSS-GEN: Issue 5 (2018-04) +A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2023 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD
is a trading name of TUV SUD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TUV SUD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record	2
1.2	Introduction	2
1.3	Brief Summary of Results	3
1.4	Product Information.....	4
1.5	Deviations from the Standard	5
1.6	EUT Modification Record.....	6
1.7	Test Location	7
2	Test Details	8
2.1	Emission Bandwidth	8
2.2	Maximum Conducted Output Power	114
2.3	Maximum Conducted Power Spectral Density.....	190
2.4	Authorised Band Edges	261
2.5	Spurious Radiated Emissions	312
2.6	Unwanted Emissions within the 5925-7125 MHz band.....	333
2.7	Contention Based Protocol	385
3	Measurement Uncertainty	406



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	08-December-2023

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A3114
Serial Number(s)	DX1XKC7N34, M62426V40D, D93J4WJ66Y, DJJV23F6C5, F913QPYWR6 and FWT64GMGVB
Hardware Version(s)	REV 1.0
Software Version(s)	23A32771a, 23A32771a, 23A32771a, 23B40a, 23A32771a and 23A32771a
Number of Samples Tested	6
Test Specification/Issue/Date	FCC 47 CFR Part 15E: 2021 ISED RSS-248: Issue 2 (2022-12) ISED RSS-GEN: Issue 5 (2018-04) +A2 (2021-02)
Start of Test	12-September-2023
Finish of Test	01-December-2023
Name of Engineer(s)	Feda Hussein, David Hill, Mahmud Chowdhury, Mustafa Murad, Akhil Rajendran Bhaskaran Nair, Ioan-Alexandru Bogatu, Jamal Imoro Abubakar, James Woods, Michael Evans, Morsalin Hossain, Ahmed Al Derdiri, Nicolae Mihailiuc, Tony Baby, Stefan Gilfedder and Tjijandjeua Tjizumaue
Related Document(s)	ANSI C63.10 (2013) ANSI C63.10 (2020) KDB 662911 D01 v02r01 KDB 789033 D02 v02r01 KDB 987594 D02 v02r01



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E, ISED RSS-248 and ISED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15E	RSS-248	RSS-GEN			
Configuration and Mode: 6 GHz WLAN						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.407 (a)	4.4	6.7	Emission Bandwidth	Pass	KDB 789033 D02 v02r01
2.2	15.407 (a)	4.5	6.12	Maximum Conducted Output Power	Pass	KDB 662911 D01 v02r01 KDB 789033 D02 v02r01
2.3	15.407 (a)	4.5	-	Maximum Conducted Power Spectral Density	Pass	KDB 662911 D01 v02r01 KDB 789033 D02 v02r01
2.4	15.407 (b)	4.6	6.13	Authorised Band Edges	Pass	ANSI C63.10 (2013) ANSI C63.10 (2020) KDB 789033 D02 v02r01
2.5	15.209 and 15.407 (b)	4.6	6.13 and 8.9	Spurious Radiated Emissions	Pass	ANSI C63.10 (2013) ANSI C63.10 (2020) KDB 789033 D02 v02r01
2.6	15.407 (b)	4.6	6.13	Unwanted Emissions within the 5925-7125 MHz band	Pass	KDB 987594 D02 v02r01
2.7	15.407 (d)(6)	4.7	-	Contention Based Protocol	Pass	KDB 987594 D02 v02r01

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

1.4.2 Test Modes

The EUT's 6 GHz 802.11 radio supported SISO (Single Input/Single Output) and 2x2 MIMO (Multiple Input/Multiple Output) modes. 802.11a supports 20 MHz bandwidth only. 802.11ax supported 20 MHz, 40 MHz, 80 MHz and 160 MHz bandwidths.

802.11a mode supported SISO operation only. 802.11ax supported SISO, Cyclic Delay Diversity (CDD) and Space Division Multiplexing (SDM) modes. It also supported Transmit Beamforming (TxBF) mode on 20 MHz, 40 MHz and 80 MHz bandwidths. The EUT supported 802.11ax Single User (SU) and Multi-User (MU) with all Resource Unit (RU) sizes from 26 subcarriers, up to the maximum allowed, dependent on channel bandwidth.

The EUT is categorized a Dual Client (6CD) operating in the 5.925-7.125 GHz bands. It will operate under the control of a Low Power Indoor (LPI) access point, or a standard power access point.

The EUT uses different output powers per core dependent on how many cores are used. The EUT also uses different power tables for Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM) and Transmit Beamforming (TxBF) modes. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated powers per core differ.

After preliminary investigations were performed to find worst-case operation, the EUT was tested in the following modes:

SISO Modes (Core 0 or 1):

- 802.11a – 12 Mbps
- 802.11ax HE20 SU – MCS2x1
- 802.11ax HE40 SU – MCS2x1
- 802.11ax HE80 SU – MCS2x1
- 802.11ax HE160 SU – MCS2x1
- 802.11ax HE20 MU RU26/52/106 – MCS2x1

2x2 MIMO Modes (Core 0+1 for U-NII-5 / 6 / 7 / 8):

- 802.11ax HE20 SU – CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE40 SU – CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE80 SU – CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE160 SU – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE20 MU RU26/52/106 – CDD (MCS2x1) and SDM (MCS2x2)

*Note: The RU offset for bottom and middle channels were placed in the lowest position and on the top channel, the offset was placed in the upper most position.



1.4.3 Test Setup

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all testing except Contention Based Protocol the EUT was put into a continuous transmit test mode with the chipset manufacturer’s test commands. The EUT then transmitted the required type of packeted 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

The test setup used for Contention Based Protocol is described in the test result section of the present document.

1.4.4 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	5925-6105	6.36	1.2
	6105-6265	5.12	1.3
	6265-6425	5.06	1.3
	6425-6525	4.38	1.3
	6525-6875	4.79	1.4
	6875-7125	5.40	1.4
Core 1	5925-6105	6.43	1.2
	6105-6265	5.13	1.3
	6265-6425	4.54	1.3
	6425-6525	4.29	1.3
	6525-6875	5.71	1.4
	6875-7125	5.33	1.4

Table 3

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3114, Serial Number: D93J4WJ66Y			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3114, Serial Number: M62426V40D			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3114, Serial Number: FWT64GMGVG			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3114, Serial Number: DJJV23F6C5			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3114, Serial Number: DX1XKC7N34			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3114, Serial Number: F913QPYWR6			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 4



1.7 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 6 GHz WLAN		
Emission Bandwidth	Feda Hussein	UKAS
Maximum Conducted Output Power	Feda Hussein	UKAS
Maximum Conducted Power Spectral Density	Feda Hussein	UKAS
Authorised Band Edges	Akhil Rajendran Bhaskaran Nair, Ioan-Alexandru Bogatu, Jamal Imoro Abubakar, James Woods, Michael Evans and Morsalin Hossain	UKAS
Spurious Radiated Emissions	Ahmed Al Derdiri, Jamal Imoro Abubakar, James Woods, Michael Evans, Nicolae Mihailiuc and Tony Baby	UKAS
Unwanted Emissions within the 5925-7125 MHz band	Feda Hussein, David Hill, Mahmud Chowdhury and Mustafa Murad	UKAS
Contention Based Protocol	Stefan Gilfedder and Tjijandjeua Tjizumaue	UKAS

Table 5

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Emission Bandwidth

2.1.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-248, Clause 4.4
ISED RSS-GEN, Clause 6.7

2.1.2 Equipment Under Test and Modification State

A3114, S/N: F913QPYWR6 - Modification State 0
A3114, S/N: DJJV23F6C5 - Modification State 0

2.1.3 Date of Test

20-October-2023

2.1.4 Test Method

The test was performed in accordance with KDB 789033, clause C.1 for 26 dB bandwidth and clause D for 99% occupied bandwidth.

2.1.5 Environmental Conditions

Ambient Temperature	22.4 °C
Relative Humidity	55.5 %



2.1.6 Test Results

6 GHz WLAN

SISO

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11a LPI	20.940	21.180
802.11ax HE20 SU LPI	21.180	21.360
802.11ax HE40 SU LPI	41.880	42.120
802.11ax HE80 SU LPI	82.500	82.940
802.11ax HE160 SU LPI	166.320	167.580
802.11a SP	21.000	23.220
802.11ax HE20 SU SP	21.300	21.900
802.11ax HE40 SU SP	42.000	46.080
802.11ax HE80 SU SP	82.720	95.040
802.11ax HE160 SU SP	166.740	168.000

Table 6 - 26 dB Bandwidth Summary Results - SISO

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11a LPI	16.620	16.680
802.11ax HE20 SU LPI	19.020	19.020
802.11ax HE40 SU LPI	37.920	38.040
802.11ax HE80 SU LPI	77.000	77.440
802.11ax HE160 SU LPI	156.240	156.660
802.11a SP	16.620	16.800
802.11ax HE20 SU SP	19.020	19.140
802.11ax HE40 SU SP	38.040	38.280
802.11ax HE80 SU SP	77.220	77.440
802.11ax HE160 SU SP	156.240	156.660

Table 7 - 99% Bandwidth Summary Results - SISO



Figure 1 - 802.11a LPI Minimum 99% OBW



Figure 2 - 802.11a LPI Maximum 99% OBW

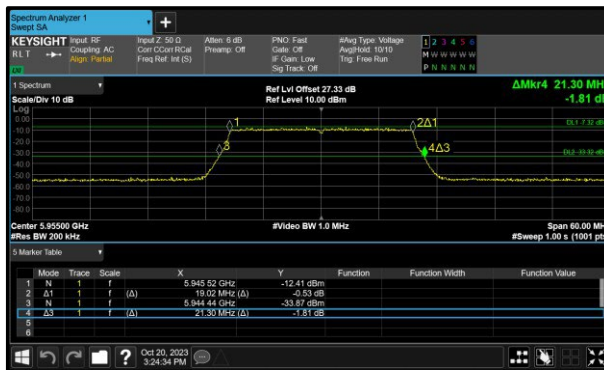


Figure 3 - 802.11ax HE20 SU LPI Minimum 99% OBW



Figure 4 - 802.11ax HE20 SU LPI Maximum 99% OBW



Figure 5 - 802.11ax HE40 SU LPI Minimum 99% OBW



Figure 6 - 802.11ax HE40 SU LPI Maximum 99% OBW

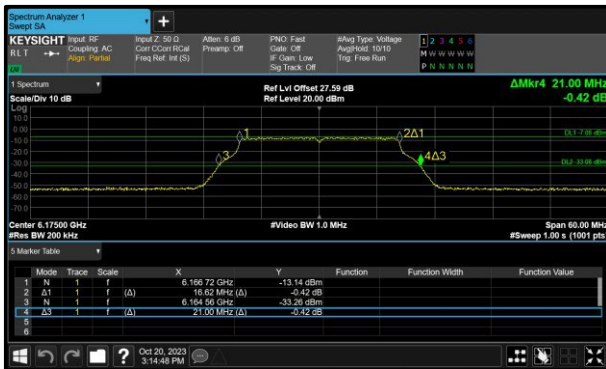


Figure 7 - 802.11ax HE80 SU LPI
 Minimum 99% OBW

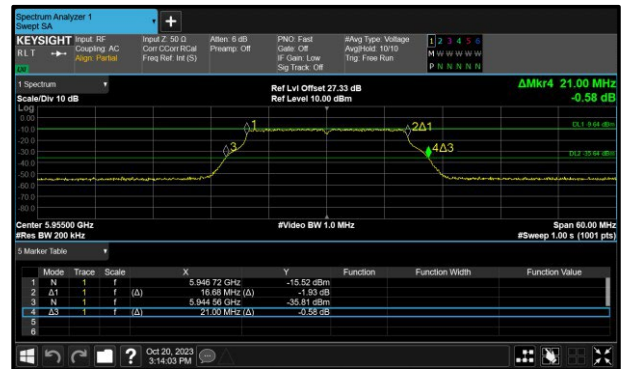


Figure 8 - 802.11ax HE80 SU LPI
 Maximum 99% OBW

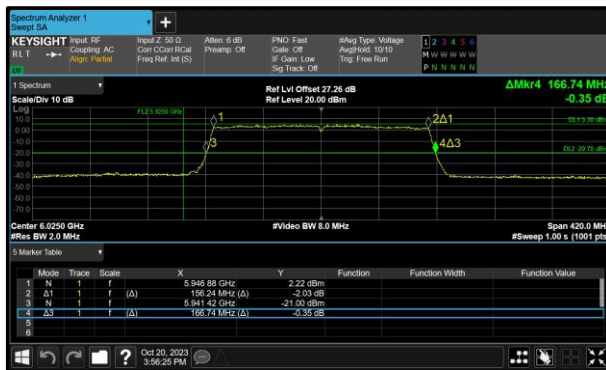


Figure 9 - 802.11ax HE160 SU LPI
 Minimum 99% OBW



Figure 10 - 802.11ax HE160 SU LPI
 Maximum 99% OBW



Figure 11 - 802.11a SP Minimum 99%
 OBW

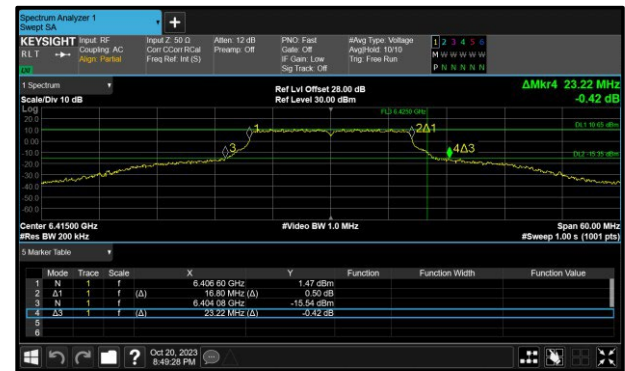


Figure 12 - 802.11a SP Maximum 99%
 OBW

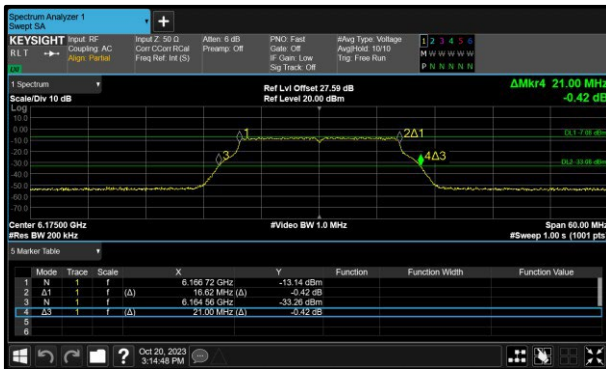


Figure 13 - 802.11ax HE20 SU SP
 Minimum 99% OBW

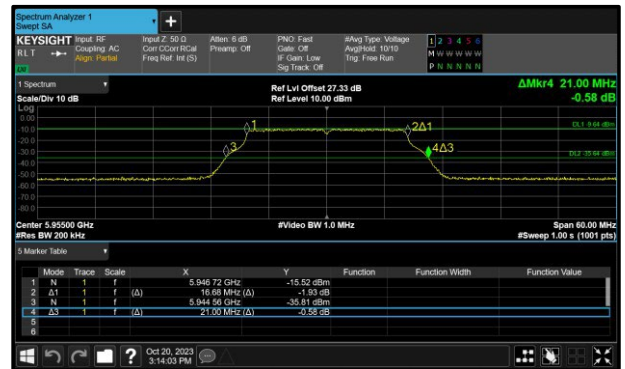


Figure 14 - 802.11ax HE20 SU SP
 Maximum 99% OBW

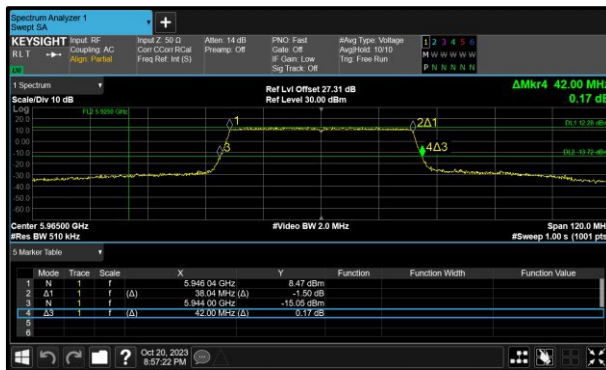


Figure 15 - 802.11ax HE40 SU SP
 Minimum 99% OBW

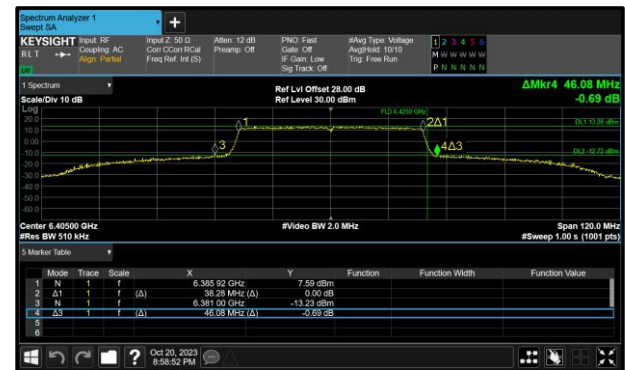


Figure 16 - 802.11ax HE40 SU SP
 Maximum 99% OBW



Figure 17 - 802.11ax HE80 SU SP
 Minimum 99% OBW



Figure 18 - 802.11ax HE80 SU SP
 Maximum 99% OBW

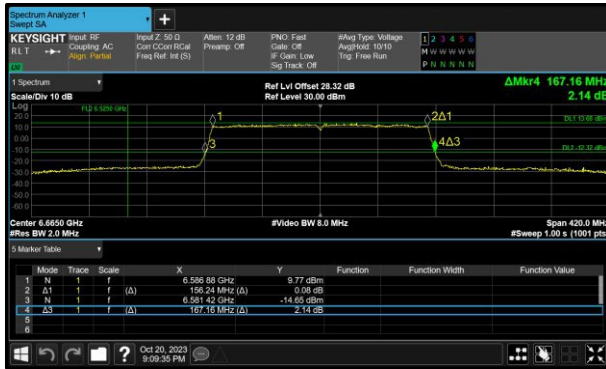


Figure 19 - 802.11ax HE160 SU SP
 Minimum 99% OBW



Figure 20 - 802.11ax HE160 SU SP
 Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	-	21.000	-	-	-
6175	-	21.000	-	-	-
6415	21.060	-	-	-	-

Table 8 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	-	16.680	-	-	-
6175	-	16.620	-	-	-
6415	16.680	-	-	-	-

Table 9 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	-	21.300	-	-	-
6175	-	21.180	-	-	-
6415	21.360	-	-	-	-

Table 10 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	-	19.020	-	-	-
6175	-	19.020	-	-	-
6415	19.020	-	-	-	-

Table 11 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	-	42.000	-	-	-
6165	-	42.000	-	-	-
6405	42.000	-	-	-	-

Table 12 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	-	37.920	-	-	-
6165	-	37.920	-	-	-
6405	38.040	-	-	-	-

Table 13 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	-	82.500	-	-	-
6145	-	82.940	-	-	-
6385	82.940	-	-	-	-

Table 14 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	-	77.220	-	-	-
6145	-	77.220	-	-	-
6385	77.220	-	-	-	-

Table 15 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	-	166.740	-	-	-
6185	-	166.740	-	-	-
6345	167.160	-	-	-	-

Table 16 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	-	156.240	-	-	-
6185	-	156.660	-	-	-
6345	156.660	-	-	-	-

Table 17 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6435	21.060	-	-	-	-
6475	21.180	-	-	-	-
6515	21.060	-	-	-	-

Table 18 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6435	16.680	-	-	-	-
6475	16.680	-	-	-	-
6515	16.680	-	-	-	-

Table 19 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6435	21.300	-	-	-	-
6475	21.300	-	-	-	-
6515	21.300	-	-	-	-

Table 20 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6435	19.020	-	-	-	-
6475	19.020	-	-	-	-
6515	19.020	-	-	-	-

Table 21 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6445	41.880	-	-	-	-
6485	42.120	-	-	-	-
6525	20.880	-	-	-	-

Table 22 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6445	37.920	-	-	-	-
6485	38.040	-	-	-	-
6525	18.960	-	-	-	-

Table 23 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6465	82.720	-	-	-	-
6545	-	21.360	-	-	-

Table 24 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6465	77.220	-	-	-	-
6545	-	18.940	-	-	-

Table 25 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	99.800	-	-	-	-

Table 26 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	97.700	-	-	-	-

Table 27 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	-	21.000	-	-	-
6695	-	20.940	-	-	-
6855	-	21.060	-	-	-
6875	-	10.440	-	-	-

Table 28 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	-	16.680	-	-	-
6695	-	16.680	-	-	-
6855	-	16.620	-	-	-
6875	-	8.280	-	-	-

Table 29 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	-	21.300	-	-	-
6695	-	21.300	-	-	-
6855	-	21.240	-	-	-
6875	-	10.620	-	-	-

Table 30 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	-	19.020	-	-	-
6695	-	19.020	-	-	-
6855	-	19.020	-	-	-
6875	-	9.480	-	-	-

Table 31 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6525	21.120	-	-	-	-
6565	-	41.880	-	-	-
6685	-	42.000	-	-	-
6845	-	42.120	-	-	-
6885	-	10.880	-	-	-

Table 32 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6525	18.960	-	-	-	-
6565	-	37.920	-	-	-
6685	-	38.040	-	-	-
6845	-	38.040	-	-	-
6885	-	9.200	-	-	-

Table 33 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6545	-	61.580	-	-	-
6625	-	82.940	-	-	-
6705	-	82.500	-	-	-
6785	-	82.940	-	-	-
6865	-	51.140	-	-	-

Table 34 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6545	-	58.280	-	-	-
6625	-	77.220	-	-	-
6705	-	77.220	-	-	-
6785	-	77.000	-	-	-
6865	-	48.500	-	-	-

Table 35 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	63.160	-	-	-	-
6665	-	166.320	-	-	-
6825	-	133.580	-	-	-

Table 36 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	58.540	-	-	-	-
6665	-	156.240	-	-	-
6825	-	127.700	-	-	-

Table 37 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6875	-	10.560	-	-	-
6895	21.060	-	-	-	-
6995	21.060	-	-	-	-
7115	21.120	-	-	-	-

Table 38 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6875	-	8.400	-	-	-
6895	16.680	-	-	-	-
6995	16.680	-	-	-	-
7115	16.680	-	-	-	-

Table 39 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6875	-	10.680	-	-	-
6895	21.300	-	-	-	-
6995	21.180	-	-	-	-
7095	21.300	-	-	-	-

Table 40 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6875	-	9.540	-	-	-
6895	19.020	-	-	-	-
6995	19.020	-	-	-	-
7095	19.020	-	-	-	-

Table 41 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6885	-	30.880	-	-	-
6925	42.000	-	-	-	-
7005	41.880	-	-	-	-
7085	41.880	-	-	-	-

Table 42 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6885	-	28.840	-	-	-
6925	38.040	-	-	-	-
7005	37.920	-	-	-	-
7085	37.920	-	-	-	-

Table 43 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6865	-	31.360	-	-	-
6945	82.720	-	-	-	-
7025	82.720	-	-	-	-

Table 44 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6865	-	28.720	-	-	-
6945	77.440	-	-	-	-
7025	77.220	-	-	-	-

Table 45 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6825	-	33.580	-	-	-
6985	167.580	-	-	-	-

Table 46 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6825	-	29.380	-	-	-
6985	156.240	-	-	-	-

Table 47 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	-	21.000	-	-	-
6175	-	21.180	-	-	-
6415	23.220	-	-	-	-

Table 48 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	-	16.620	-	-	-
6175	-	16.740	-	-	-
6415	16.800	-	-	-	-

Table 49 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	-	21.300	-	-	-
6175	-	21.480	-	-	-
6415	21.900	-	-	-	-

Table 50 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	-	19.020	-	-	-
6175	-	19.020	-	-	-
6415	19.140	-	-	-	-

Table 51 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	-	42.000	-	-	-
6165	-	42.120	-	-	-
6405	46.080	-	-	-	-

Table 52 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	-	38.040	-	-	-
6165	-	38.160	-	-	-
6405	38.280	-	-	-	-

Table 53 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	-	82.720	-	-	-
6145	-	83.160	-	-	-
6385	95.040	-	-	-	-

Table 54 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	-	77.220	-	-	-
6145	-	77.440	-	-	-
6385	77.440	-	-	-	-

Table 55 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	-	166.740	-	-	-
6185	-	168.000	-	-	-
6345	166.740	-	-	-	-

Table 56 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	-	156.660	-	-	-
6185	-	156.660	-	-	-
6345	156.660	-	-	-	-

Table 57 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	-	21.240	-	-	-
6695	-	21.060	-	-	-
6855	-	21.060	-	-	-

Table 58 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	-	16.740	-	-	-
6695	-	16.740	-	-	-
6855	-	16.740	-	-	-

Table 59 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	-	21.540	-	-	-
6695	-	21.420	-	-	-
6855	-	21.420	-	-	-

Table 60 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	-	19.080	-	-	-
6695	-	19.020	-	-	-
6855	-	19.020	-	-	-

Table 61 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6565	-	42.840	-	-	-
6685	-	42.720	-	-	-
6845	-	42.240	-	-	-

Table 62 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6565	-	38.160	-	-	-
6685	-	38.160	-	-	-
6845	-	38.160	-	-	-

Table 63 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6625	-	83.380	-	-	-
6705	-	83.160	-	-	-
6785	-	83.380	-	-	-

Table 64 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6625	-	77.440	-	-	-
6705	-	77.440	-	-	-
6785	-	77.440	-	-	-

Table 65 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6665	-	167.160	-	-	-

Table 66 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6665	-	156.240	-	-	-

Table 67 - 99% Bandwidth Results




MIMO CDD

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	21.180	21.480
802.11ax HE40 SU LPI	41.760	42.240
802.11ax HE80 SU LPI	82.280	83.160
802.11ax HE160 SU LPI	165.900	167.160
802.11ax HE20 SU SP	21.180	21.480
802.11ax HE40 SU SP	41.760	42.120
802.11ax HE80 SU SP	82.280	87.340
802.11ax HE160 SU SP	166.740	167.580


Table 68 - 26 dB Bandwidth Summary Results - MIMO CDD

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	19.020	19.020
802.11ax HE40 SU LPI	37.920	38.040
802.11ax HE80 SU LPI	77.000	77.440
802.11ax HE160 SU LPI	156.240	156.660
802.11ax HE20 SU SP	19.020	19.020
802.11ax HE40 SU SP	37.920	38.040
802.11ax HE80 SU SP	77.220	77.440
802.11ax HE160 SU SP	156.240	156.660

Table 69 - 99% Bandwidth Summary Results - MIMO CDD

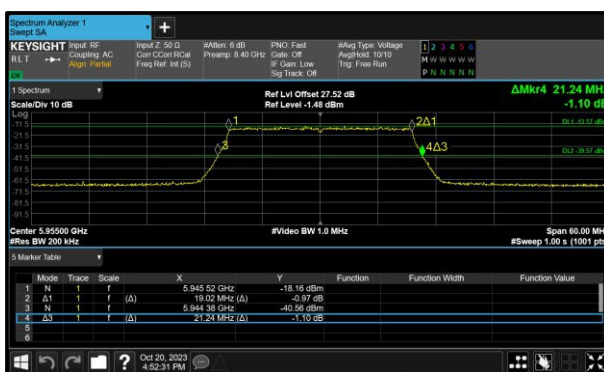

**Figure 21 - 802.11ax HE20 SU LPI
 Minimum 99% OBW**

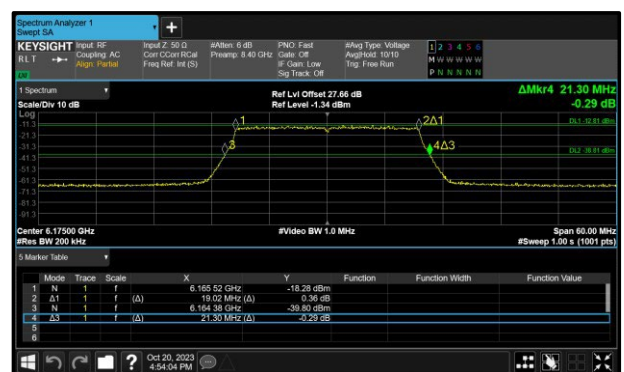

**Figure 22 - 802.11ax HE20 SU LPI
 Maximum 99% OBW**

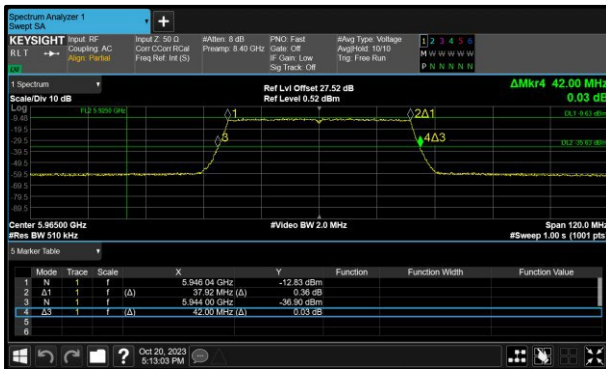


Figure 23 - 802.11ax HE40 SU LPI
 Minimum 99% OBW



Figure 24 - 802.11ax HE40 SU LPI
 Maximum 99% OBW



Figure 25 - 802.11ax HE80 SU LPI
 Minimum 99% OBW



Figure 26 - 802.11ax HE80 SU LPI
 Maximum 99% OBW

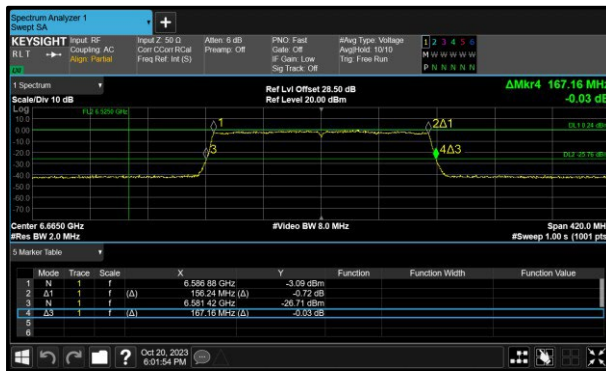


Figure 27 - 802.11ax HE160 SU LPI
 Minimum 99% OBW

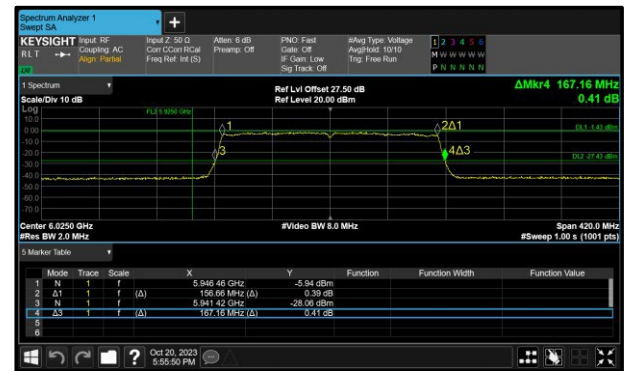


Figure 28 - 802.11ax HE160 SU LPI
 Maximum 99% OBW

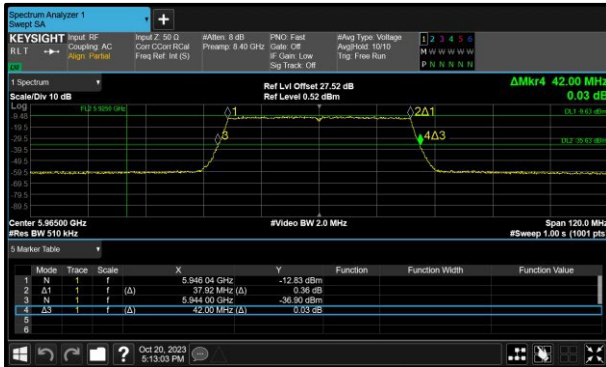


Figure 29 - 802.11ax HE20 SU SP
 Minimum 99% OBW



Figure 30 - 802.11ax HE20 SU SP
 Maximum 99% OBW

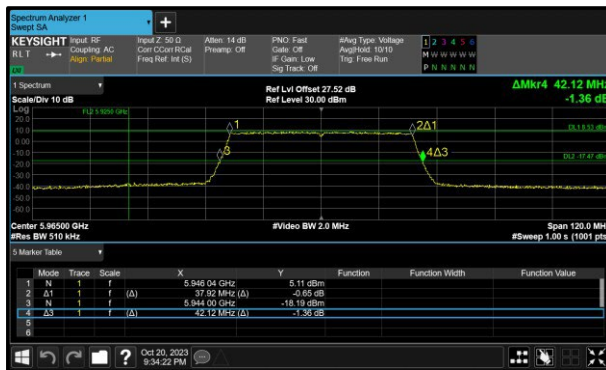


Figure 31 - 802.11ax HE40 SU SP
 Minimum 99% OBW



Figure 32 - 802.11ax HE40 SU SP
 Maximum 99% OBW



Figure 33 - 802.11ax HE80 SU SP
 Minimum 99% OBW



Figure 34 - 802.11ax HE80 SU SP
 Maximum 99% OBW

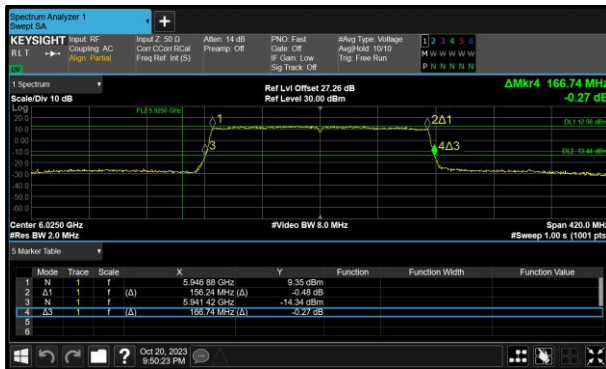


Figure 35 - 802.11ax HE160 SU SP
 Minimum 99% OBW



Figure 36 - 802.11ax HE160 SU SP
 Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	21.240	21.420	-	-	-
6175	21.300	21.360	-	-	-
6415	21.360	21.420	-	-	-

Table 70 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	19.020	19.020	-	-	-
6175	19.020	19.020	-	-	-
6415	19.020	19.020	-	-	-

Table 71 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	42.000	42.120	-	-	-
6165	41.880	42.000	-	-	-
6405	41.760	42.240	-	-	-

Table 72 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	37.920	37.920	-	-	-
6165	37.920	38.040	-	-	-
6405	37.920	38.040	-	-	-

Table 73 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	83.160	82.940	-	-	-
6145	82.720	82.720	-	-	-
6385	82.720	82.720	-	-	-

Table 74 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	77.220	77.000	-	-	-
6145	77.220	77.220	-	-	-
6385	77.220	77.000	-	-	-

Table 75 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	167.160	166.320	-	-	-
6185	167.160	166.320	-	-	-
6345	166.740	165.900	-	-	-

Table 76 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	156.660	156.660	-	-	-
6185	156.660	156.660	-	-	-
6345	156.660	156.660	-	-	-

Table 77 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6435	21.240	21.360	-	-	-
6475	21.180	21.240	-	-	-
6515	21.360	21.360	-	-	-

Table 78 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6435	19.020	19.020	-	-	-
6475	19.020	19.020	-	-	-
6515	19.020	19.020	-	-	-

Table 79 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6445	42.000	41.880	-	-	-
6485	42.000	42.120	-	-	-
6525	21.000	21.000	-	-	-

Table 80 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6445	37.920	37.920	-	-	-
6485	37.920	38.040	-	-	-
6525	18.960	18.960	-	-	-

Table 81 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6465	82.720	82.720	-	-	-
6545	21.140	21.580	-	-	-

Table 82 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6465	77.220	77.220	-	-	-
6545	18.940	18.940	-	-	-

Table 83 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	99.800	99.800	-	-	-

Table 84 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	98.120	97.700	-	-	-

Table 85 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	21.180	21.420	-	-	-
6695	21.240	21.360	-	-	-
6855	21.240	21.300	-	-	-
6875	10.620	10.680	-	-	-

Table 86 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	19.020	19.020	-	-	-
6695	19.020	19.020	-	-	-
6855	19.020	19.020	-	-	-
6875	9.480	9.480	-	-	-

Table 87 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6525	21.000	20.880	-	-	-
6565	42.120	42.120	-	-	-
6685	41.760	42.120	-	-	-
6845	42.000	42.000	-	-	-
6885	11.000	11.120	-	-	-

Table 88 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6525	19.080	18.960	-	-	-
6565	37.920	37.920	-	-	-
6685	37.920	37.920	-	-	-
6845	37.920	37.920	-	-	-
6885	9.320	9.320	-	-	-

Table 89 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6545	61.360	61.360	-	-	-
6625	82.500	82.940	-	-	-
6705	83.160	82.720	-	-	-
6785	82.720	82.720	-	-	-
6865	51.360	51.580	-	-	-

Table 90 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6545	58.280	58.280	-	-	-
6625	77.220	77.220	-	-	-
6705	77.220	77.000	-	-	-
6785	77.220	77.440	-	-	-
6865	48.500	48.500	-	-	-

Table 91 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	63.580	63.160	-	-	-
6665	167.160	166.740	-	-	-
6825	133.580	133.580	-	-	-

Table 92 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	58.540	58.540	-	-	-
6665	156.240	156.240	-	-	-
6825	127.700	127.700	-	-	-

Table 93 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6875	10.620	10.740	-	-	-
6895	21.240	21.480	-	-	-
6995	21.300	21.240	-	-	-
7095	21.360	21.360	-	-	-

Table 94 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6875	9.540	9.540	-	-	-
6895	19.020	19.020	-	-	-
6995	19.020	19.020	-	-	-
7095	19.020	19.020	-	-	-

Table 95 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6885	31.000	31.000	-	-	-
6925	41.880	42.120	-	-	-
7005	41.760	42.000	-	-	-
7085	42.000	42.000	-	-	-

Table 96 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6885	28.840	28.840	-	-	-
6925	38.040	37.920	-	-	-
7005	37.920	37.920	-	-	-
7085	38.040	38.040	-	-	-

Table 97 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6865	31.360	31.140	-	-	-
6945	82.280	82.500	-	-	-
7025	82.720	82.940	-	-	-

Table 98 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6865	28.720	28.720	-	-	-
6945	77.220	77.440	-	-	-
7025	77.440	77.220	-	-	-

Table 99 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6825	33.160	33.160	-	-	-
6985	167.160	166.320	-	-	-

Table 100 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6825	29.380	29.380	-	-	-
6985	156.660	156.660	-	-	-

Table 101 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	21.300	21.420	-	-	-
6175	21.240	21.240	-	-	-
6415	21.240	21.180	-	-	-

Table 102 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	19.020	19.020	-	-	-
6175	19.020	19.020	-	-	-
6415	19.020	19.020	-	-	-

Table 103 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	42.120	42.000	-	-	-
6165	41.760	42.000	-	-	-
6405	41.880	41.880	-	-	-

Table 104 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	37.920	37.920	-	-	-
6165	37.920	37.920	-	-	-
6405	37.920	37.920	-	-	-

Table 105 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	82.500	82.500	-	-	-
6145	82.720	83.380	-	-	-
6385	83.160	87.340	-	-	-

Table 106 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	77.220	77.220	-	-	-
6145	77.440	77.440	-	-	-
6385	77.440	77.440	-	-	-

Table 107 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	167.160	166.740	-	-	-
6185	167.580	166.740	-	-	-
6345	167.580	166.740	-	-	-

Table 108 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	156.660	156.240	-	-	-
6185	156.240	156.660	-	-	-
6345	156.660	156.660	-	-	-

Table 109 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	21.480	21.360	-	-	-
6695	21.360	21.300	-	-	-
6855	21.360	21.360	-	-	-

Table 110 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	19.020	19.020	-	-	-
6695	19.020	19.020	-	-	-
6855	19.020	19.020	-	-	-

Table 111 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6565	42.000	42.000	-	-	-
6685	41.880	41.880	-	-	-
6845	41.760	42.000	-	-	-

Table 112 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6565	38.040	37.920	-	-	-
6685	37.920	37.920	-	-	-
6845	37.920	38.040	-	-	-

Table 113 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6625	82.720	83.160	-	-	-
6705	82.280	82.940	-	-	-
6785	82.720	83.160	-	-	-

Table 114 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6625	77.440	77.440	-	-	-
6705	77.220	77.220	-	-	-
6785	77.220	77.220	-	-	-

Table 115 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6665	166.740	166.740	-	-	-

Table 116 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6665	156.660	156.240	-	-	-

Table 117 - 99% Bandwidth Results



MIMO SDM

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	21.180	21.420
802.11ax HE40 SU LPI	41.760	42.240
802.11ax HE80 SU LPI	82.280	83.380
802.11ax HE160 SU LPI	165.900	166.740
802.11ax HE20 SU SP	21.180	21.480
802.11ax HE40 SU SP	41.760	42.240
802.11ax HE80 SU SP	82.500	95.040
802.11ax HE160 SU SP	166.740	167.160

Table 118 - 26 dB Bandwidth Summary Results - MIMO SDM

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	18.960	19.080
802.11ax HE40 SU LPI	37.920	38.160
802.11ax HE80 SU LPI	77.000	77.440
802.11ax HE160 SU LPI	156.240	156.660
802.11ax HE20 SU SP	18.960	19.080
802.11ax HE40 SU SP	37.920	38.160
802.11ax HE80 SU SP	77.220	77.440
802.11ax HE160 SU SP	156.240	156.660

Table 119 - 99% Bandwidth Summary Results - MIMO SDM



**Figure 37 - 802.11ax HE20 SU LPI
 Minimum 99% OBW**



**Figure 38 - 802.11ax HE20 SU LPI
 Maximum 99% OBW**

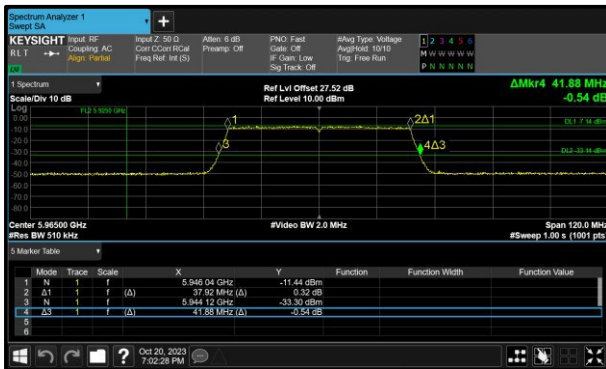


Figure 39- 802.11ax HE40 SU LPI
 Minimum 99% OBW

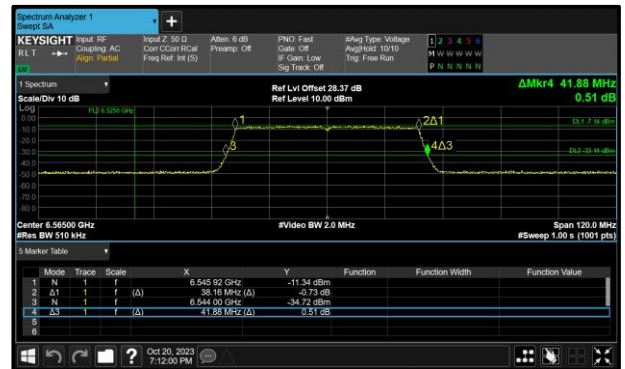


Figure 40- 802.11ax HE40 SU LPI
 Maximum 99% OBW



Figure 41 - 802.11ax HE80 SU LPI
 Minimum 99% OBW



Figure 42 - 802.11ax HE80 SU LPI
 Maximum 99% OBW

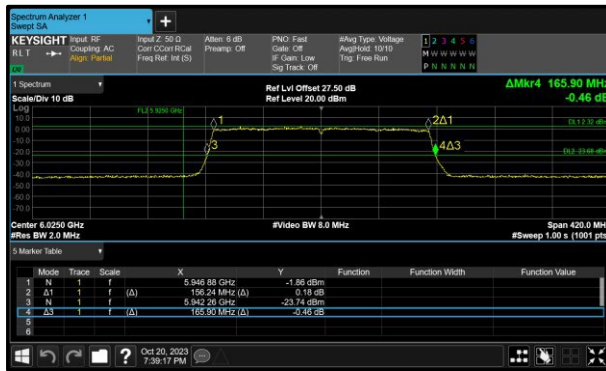


Figure 43 - 802.11ax HE160 SU LPI
 Minimum 99% OBW

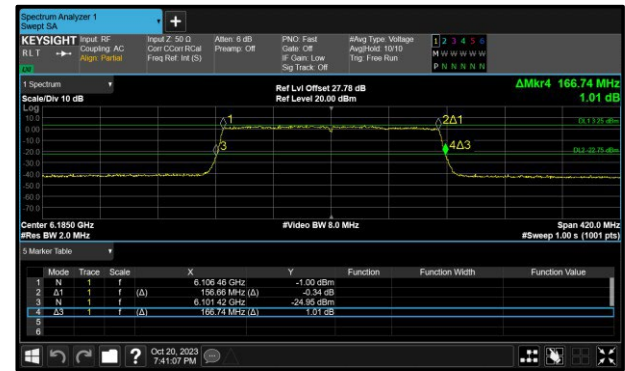


Figure 44 - 802.11ax HE160 SU LPI
 Maximum 99% OBW

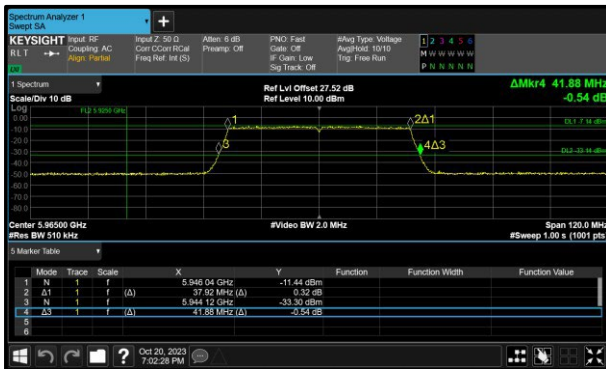


Figure 45 - 802.11ax HE20 SU SP
 Minimum 99% OBW

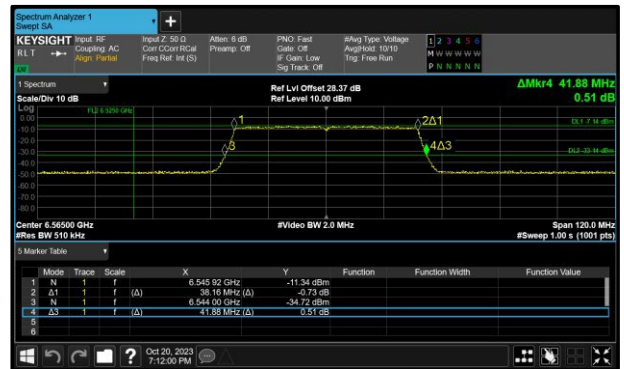


Figure 46 - 802.11ax HE20 SU SP
 Maximum 99% OBW



Figure 47 - 802.11ax HE40 SU SP
 Minimum 99% OBW



Figure 48 - 802.11ax HE40 SU SP
 Maximum 99% OBW



Figure 49 - 802.11ax HE80 SU SP
 Minimum 99% OBW

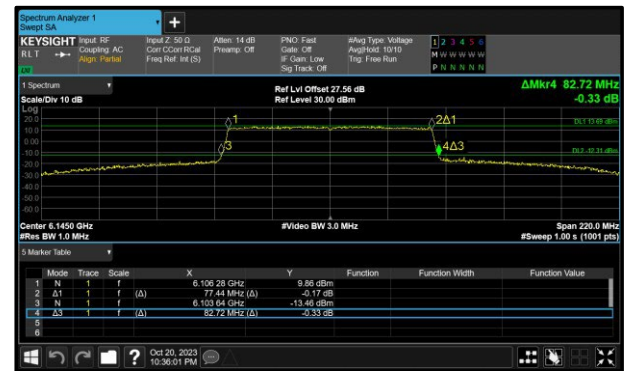


Figure 50 - 802.11ax HE80 SU SP
 Maximum 99% OBW

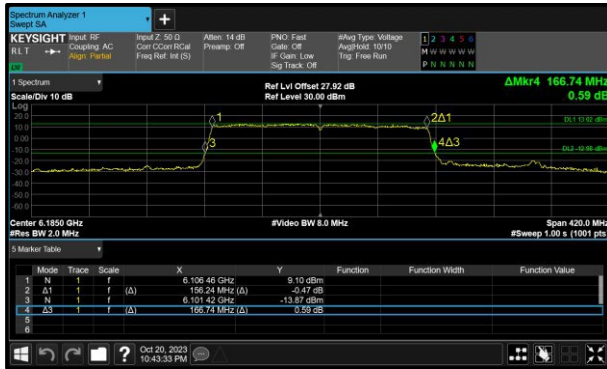


Figure 51 - 802.11ax HE160 SU SP
 Minimum 99% OBW

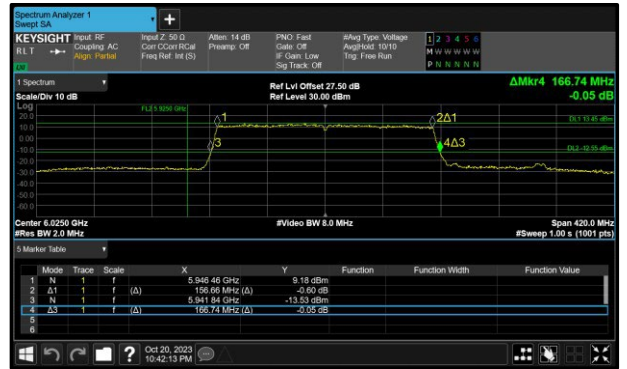


Figure 52 - 802.11ax HE160 SU SP
 Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	21.420	21.240	-	-	-
6175	21.180	21.240	-	-	-
6415	21.360	21.300	-	-	-

Table 120 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	19.020	19.020	-	-	-
6175	19.020	19.020	-	-	-
6415	19.080	19.020	-	-	-

Table 121 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	41.880	42.000	-	-	-
6165	42.000	41.880	-	-	-
6405	42.000	41.880	-	-	-

Table 122 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	37.920	38.040	-	-	-
6165	37.920	37.920	-	-	-
6405	37.920	38.040	-	-	-

Table 123 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	82.500	82.940	-	-	-
6145	82.500	83.160	-	-	-
6385	82.500	82.720	-	-	-

Table 124 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	77.440	77.220	-	-	-
6145	77.220	77.220	-	-	-
6385	77.440	77.440	-	-	-

Table 125 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	165.900	166.740	-	-	-
6185	166.320	166.740	-	-	-
6345	166.320	166.320	-	-	-

Table 126 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	156.240	156.240	-	-	-
6185	156.240	156.660	-	-	-
6345	156.240	156.660	-	-	-

Table 127 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6435	21.420	21.300	-	-	-
6475	21.360	21.360	-	-	-
6515	21.360	21.420	-	-	-

Table 128 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6435	19.080	19.020	-	-	-
6475	19.020	19.020	-	-	-
6515	19.020	19.020	-	-	-

Table 129 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6445	42.000	42.240	-	-	-
6485	42.120	42.120	-	-	-
6525	21.120	21.000	-	-	-

Table 130 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6445	37.920	38.040	-	-	-
6485	37.920	38.040	-	-	-
6525	18.960	18.960	-	-	-

Table 131 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6465	82.720	83.380	-	-	-
6545	21.140	21.800	-	-	-

Table 132 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6465	77.440	77.440	-	-	-
6545	18.940	18.940	-	-	-

Table 133 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	99.800	99.800	-	-	-

Table 134 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	97.700	97.700	-	-	-

Table 135 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	21.300	21.420	-	-	-
6695	21.360	21.300	-	-	-
6855	21.420	21.360	-	-	-
6875	10.680	10.620	-	-	-

Table 136 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	19.020	19.080	-	-	-
6695	19.020	19.020	-	-	-
6855	19.080	19.020	-	-	-
6875	9.480	9.480	-	-	-

Table 137 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6525	21.000	21.000	-	-	-
6565	42.000	41.880	-	-	-
6685	42.000	41.880	-	-	-
6845	41.880	42.120	-	-	-
6885	11.120	10.880	-	-	-

Table 138 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6525	18.960	18.960	-	-	-
6565	37.920	38.160	-	-	-
6685	37.920	38.040	-	-	-
6845	37.920	37.920	-	-	-
6885	9.200	9.320	-	-	-

Table 139 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6545	61.140	61.580	-	-	-
6625	82.280	83.160	-	-	-
6705	82.500	82.500	-	-	-
6785	82.720	82.720	-	-	-
6865	51.360	51.140	-	-	-

Table 140 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6545	58.280	58.280	-	-	-
6625	77.440	77.440	-	-	-
6705	77.440	77.000	-	-	-
6785	77.220	77.440	-	-	-
6865	48.500	48.500	-	-	-

Table 141 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	63.160	63.160	-	-	-
6665	166.740	166.740	-	-	-
6825	133.580	133.580	-	-	-

Table 142 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6505	58.540	58.540	-	-	-
6665	156.240	156.660	-	-	-
6825	127.700	127.700	-	-	-

Table 143 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6875	10.680	10.680	-	-	-
6895	21.180	21.360	-	-	-
6995	21.360	21.420	-	-	-
7095	21.360	21.360	-	-	-

Table 144 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6875	9.540	9.540	-	-	-
6895	18.960	19.020	-	-	-
6995	19.020	19.080	-	-	-
7095	19.020	19.020	-	-	-

Table 145 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6885	30.880	31.000	-	-	-
6925	42.000	41.760	-	-	-
7005	42.000	42.240	-	-	-
7085	42.120	42.000	-	-	-

Table 146 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6885	28.840	28.840	-	-	-
6925	37.920	37.920	-	-	-
7005	37.920	37.920	-	-	-
7085	37.920	38.040	-	-	-

Table 147 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6865	31.140	31.360	-	-	-
6945	82.500	82.720	-	-	-
7025	82.720	82.500	-	-	-

Table 148 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6865	28.720	28.720	-	-	-
6945	77.440	77.440	-	-	-
7025	77.440	77.440	-	-	-

Table 149 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6825	33.580	33.160	-	-	-
6985	166.320	166.320	-	-	-

Table 150 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6825	29.380	29.380	-	-	-
6985	156.240	156.240	-	-	-

Table 151 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	21.420	21.480	-	-	-
6175	21.480	21.300	-	-	-
6415	21.360	21.300	-	-	-

Table 152 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5955	19.080	19.020	-	-	-
6175	19.080	19.020	-	-	-
6415	19.080	19.080	-	-	-

Table 153 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	42.000	41.760	-	-	-
6165	42.120	42.000	-	-	-
6405	42.240	42.000	-	-	-

Table 154 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5965	37.920	38.040	-	-	-
6165	37.920	37.920	-	-	-
6405	38.160	38.160	-	-	-

Table 155 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	82.500	82.500	-	-	-
6145	82.720	82.720	-	-	-
6385	84.700	95.040	-	-	-

Table 156 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	77.440	77.220	-	-	-
6145	77.440	77.440	-	-	-
6385	77.440	77.440	-	-	-

Table 157 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	166.740	166.740	-	-	-
6185	166.740	166.740	-	-	-
6345	166.740	167.160	-	-	-

Table 158 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6025	156.660	156.660	-	-	-
6185	156.240	156.660	-	-	-
6345	156.660	156.240	-	-	-

Table 159 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	21.300	21.420	-	-	-
6695	21.360	21.240	-	-	-
6855	21.480	21.180	-	-	-

Table 160 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6535	19.020	19.080	-	-	-
6695	18.960	19.080	-	-	-
6855	19.080	19.020	-	-	-

Table 161 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6565	42.000	42.240	-	-	-
6685	42.120	42.120	-	-	-
6845	42.120	41.760	-	-	-

Table 162 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6565	37.920	38.040	-	-	-
6685	37.920	37.920	-	-	-
6845	37.920	38.040	-	-	-

Table 163 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6625	82.720	82.500	-	-	-
6705	82.940	82.940	-	-	-
6785	82.500	82.720	-	-	-

Table 164 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6625	77.440	77.440	-	-	-
6705	77.440	77.220	-	-	-
6785	77.440	77.440	-	-	-

Table 165 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6665	166.740	166.740	-	-	-

Table 166 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6665	156.240	156.240	-	-	-

Table 167 - 99% Bandwidth Results



TxBF

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE80 SU	81.620	82.940

Table 168 - 26 dB Bandwidth Summary Results - TxBF

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE80 SU	77.000	77.440

Table 169 - 99% Bandwidth Summary Results - TxBF

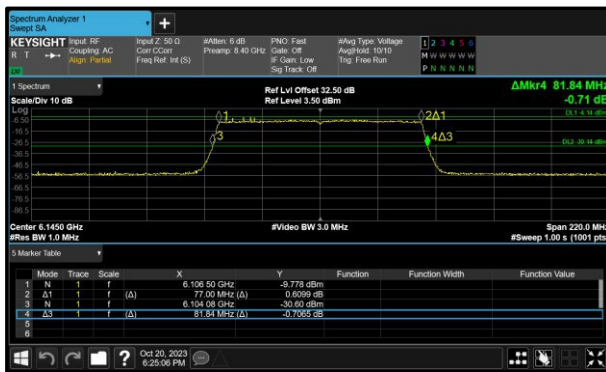


Figure 53 - 802.11ax HE80 SU Minimum 99% OBW



Figure 54 - 802.11ax HE80 SU Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	82.500	82.500	-	-	-
6145	81.840	81.840	-	-	-
6385	82.720	82.500	-	-	-

Table 170 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5985	77.220	77.220	-	-	-
6145	77.220	77.000	-	-	-
6385	77.220	77.220	-	-	-

Table 171 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6465	82.280	82.500	-	-	-
6545	21.140	20.920	-	-	-

Table 172 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6465	77.220	77.220	-	-	-
6545	19.160	18.940	-	-	-

Table 173 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6545	61.140	60.920	-	-	-
6625	82.940	82.940	-	-	-
6705	82.500	82.720	-	-	-
6785	82.280	81.620	-	-	-
6865	51.580	50.920	-	-	-

Table 174 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6545	58.280	58.280	-	-	-
6625	77.440	77.440	-	-	-
6705	77.220	77.220	-	-	-
6785	77.220	77.220	-	-	-
6865	48.500	48.500	-	-	-

Table 175 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6865	30.920	31.140	-	-	-
6945	81.840	81.620	-	-	-
7025	82.500	82.280	-	-	-

Table 176 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
6865	28.720	28.720	-	-	-
6945	77.220	77.220	-	-	-
7025	77.440	77.440	-	-	-

Table 177 - 99% Bandwidth Results