





Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5438.953	39.80	54.00	-14.20	RMS	296	398	Horizontal
5453.226	42.31	54.00	-11.69	RMS	352	297	Vertical
5715.837	53.41	68.20	-14.79	Peak	295	399	Horizontal
5718.199	57.53	68.20	-10.67	Peak	354	262	Vertical
5953.856	55.92	68.20	-12.28	Peak	353	247	Vertical

**Table 727 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 0, 30 MHz to 40 GHz**

No other emissions found within 10 dB of the limit.

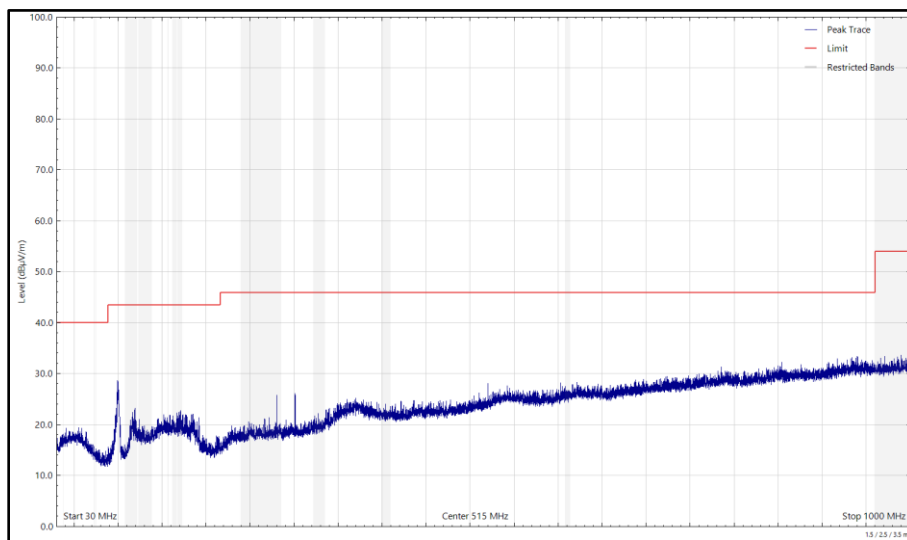

**Figure 659 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)**

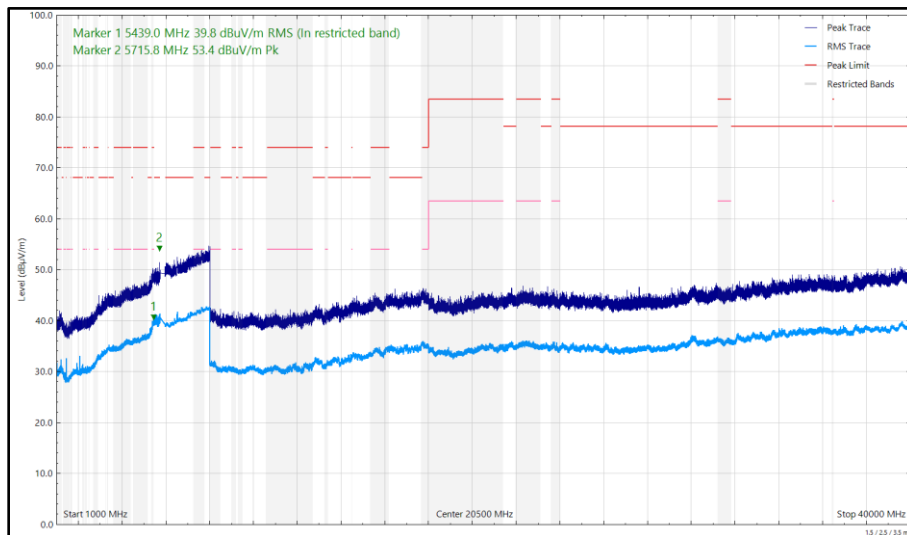

**Figure 660 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 0, 1 GHz to 40 GHz, Horizontal**

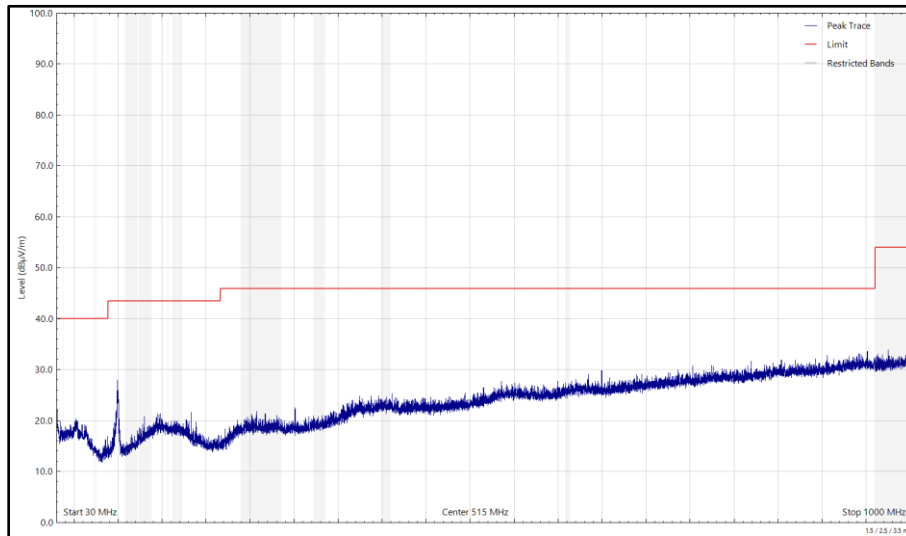


Figure 661 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

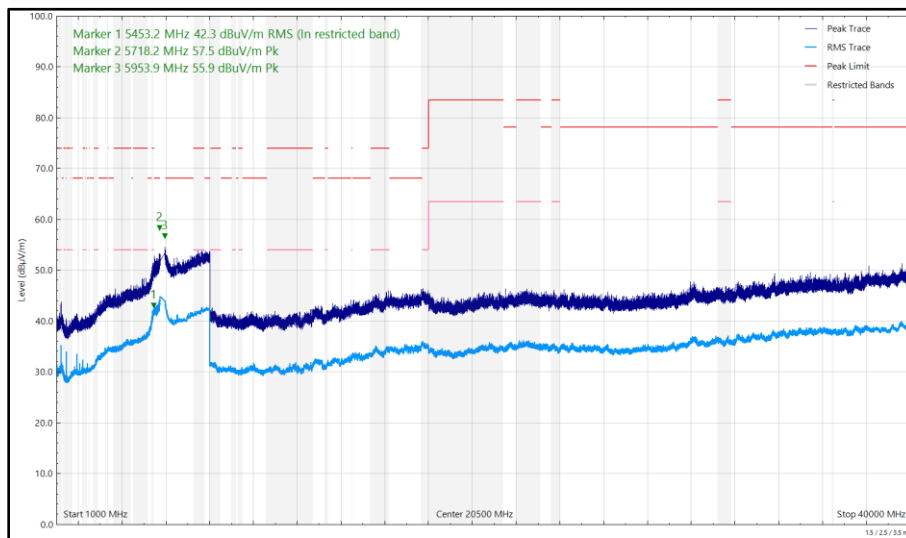



Figure 662 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 0, 1 GHz to 40 GHz, Vertical




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5109.679	41.65	54.00	-12.35	RMS	23	285	Vertical
5352.154	44.73	54.00	-9.27	RMS	6	328	Vertical
5504.304	54.14	68.20	-14.06	Peak	359	368	Vertical

**Table 728 - U-NII-1 - 5180 MHz (CH36), 802.11a, Core 1, 30 MHz to 40 GHz**

No other emissions found within 10 dB of the limit.

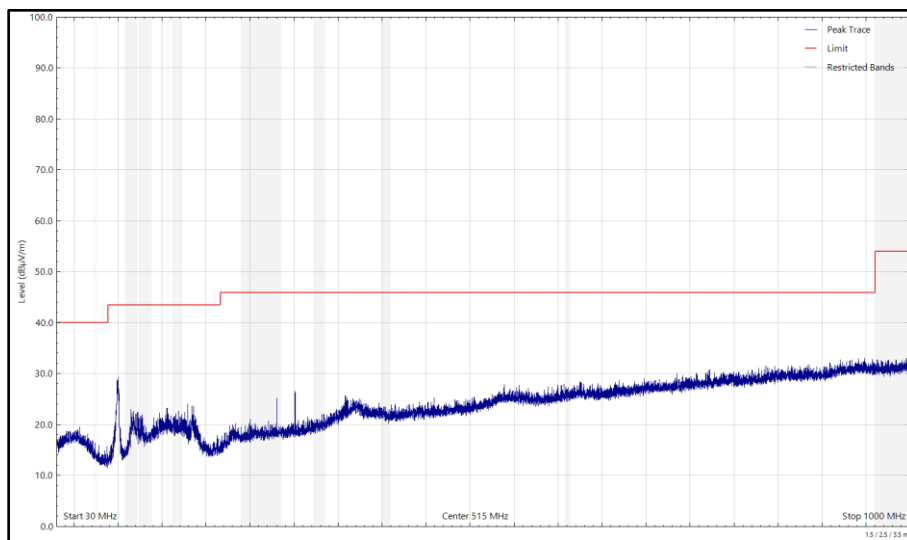

**Figure 663 - U-NII-1 - 5180 MHz (CH36), 802.11a, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)**

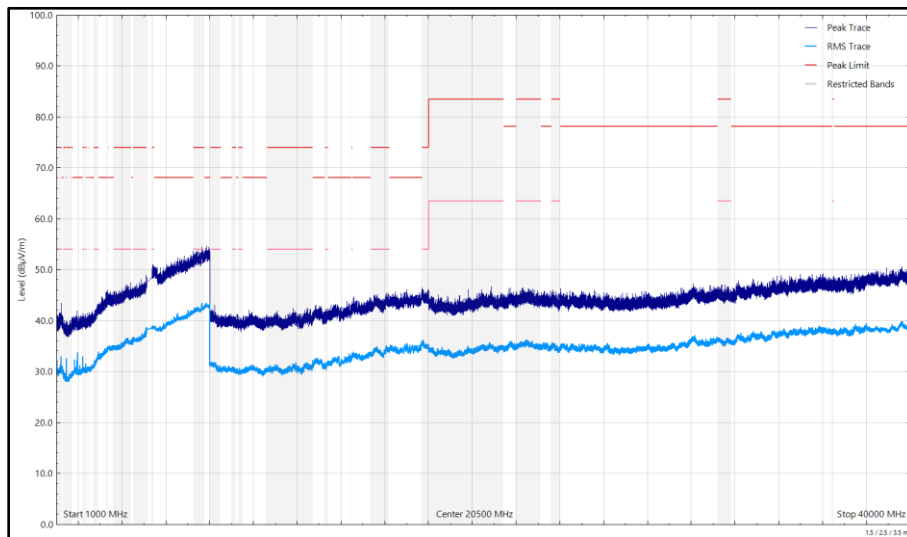

**Figure 664 - U-NII-1 - 5180 MHz (CH36), 802.11a, Core 1, 1 GHz to 40 GHz, Horizontal**

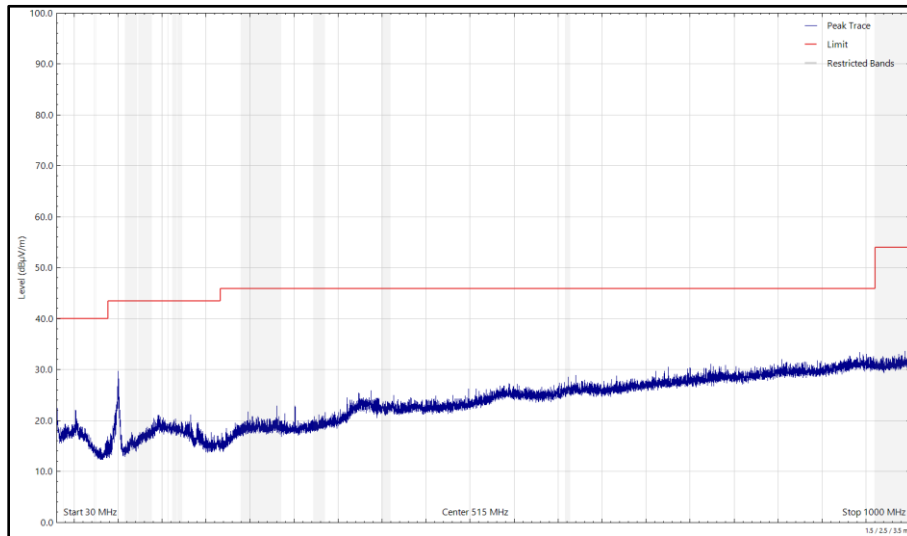


Figure 665 - U-NII-1 - 5180 MHz (CH36), 802.11a, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

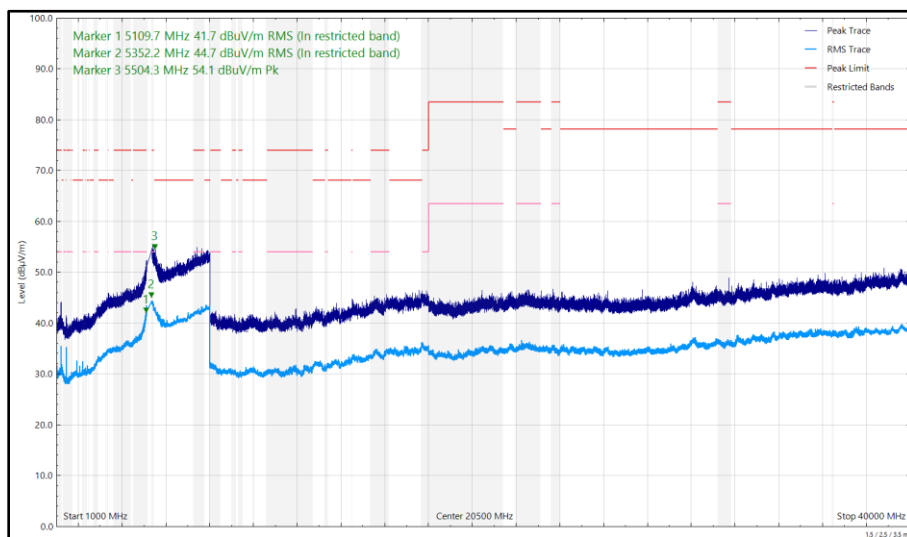



Figure 666 - U-NII-1 - 5180 MHz (CH36), 802.11a, Core 1, 1 GHz to 40 GHz, Vertical




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5149.187	42.80	54.00	-11.20	RMS	2	303	Vertical
5390.312	47.09	54.00	-6.91	RMS	3	318	Vertical
5390.716	40.03	54.00	-13.97	RMS	323	397	Horizontal
5488.263	56.47	68.20	-11.73	Peak	7	324	Vertical

**Table 729 - U-NII-2A - 5320 MHz (CH64), 802.11a, Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

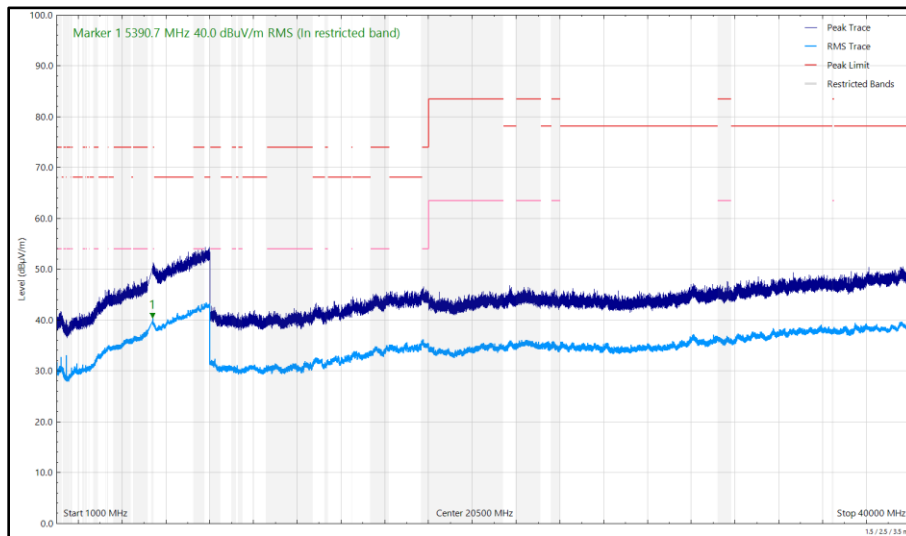

**Figure 667 - U-NII-2A - 5320 MHz (CH64), 802.11a, Core 1, 1 GHz to 40 GHz, Horizontal**

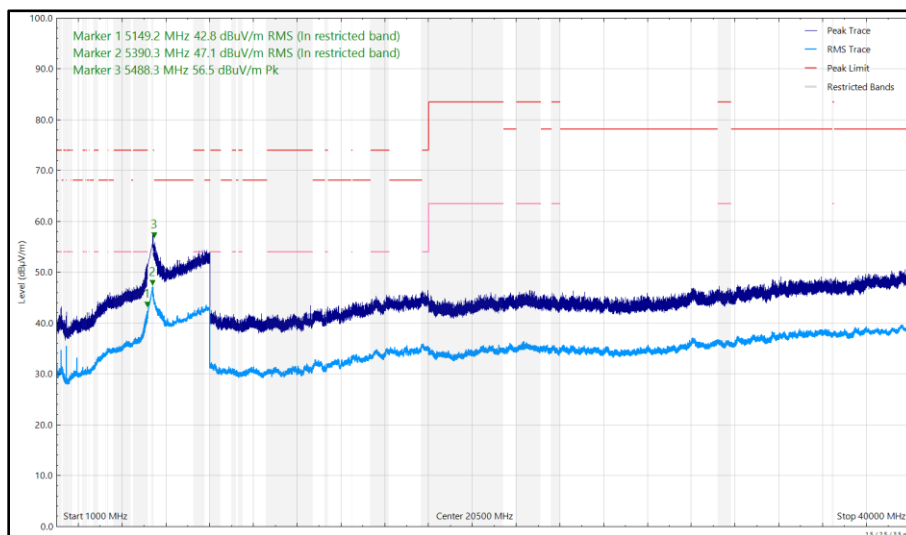


**Figure 668 - U-NII-2A - 5320 MHz (CH64), 802.11a, Core 1, 1 GHz to 40 GHz, Vertical**




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5344.333	56.60	68.20	-11.60	Peak	3	326	Vertical
5409.346	45.33	54.00	-8.67	RMS	5	323	Vertical
5409.479	39.60	54.00	-14.40	RMS	111	400	Horizontal
5744.119	55.15	68.20	-13.05	Peak	8	252	Vertical

**Table 730 - U-NII-2C - 5500 MHz (CH100), 802.11a, Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

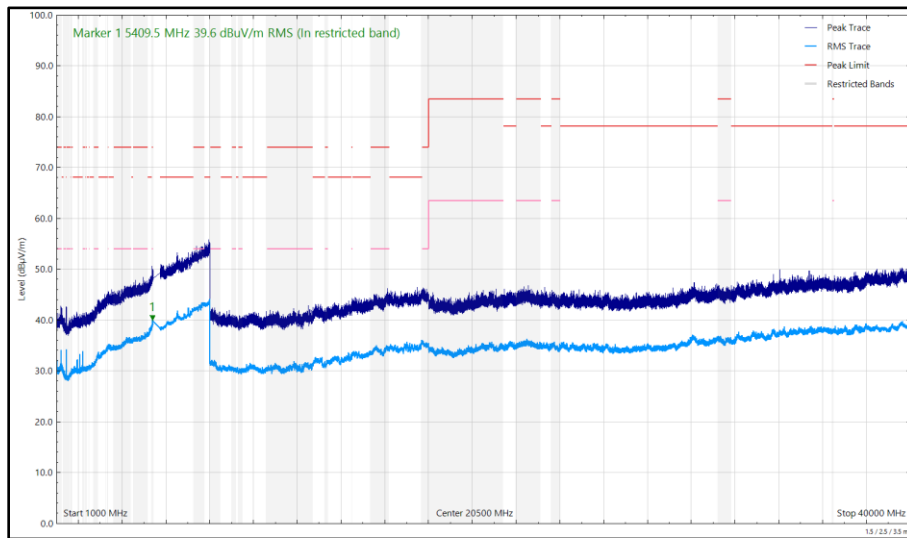

**Figure 669 - U-NII-2C - 5500 MHz (CH100), 802.11a, Core 1, 1 GHz to 40 GHz, Horizontal**

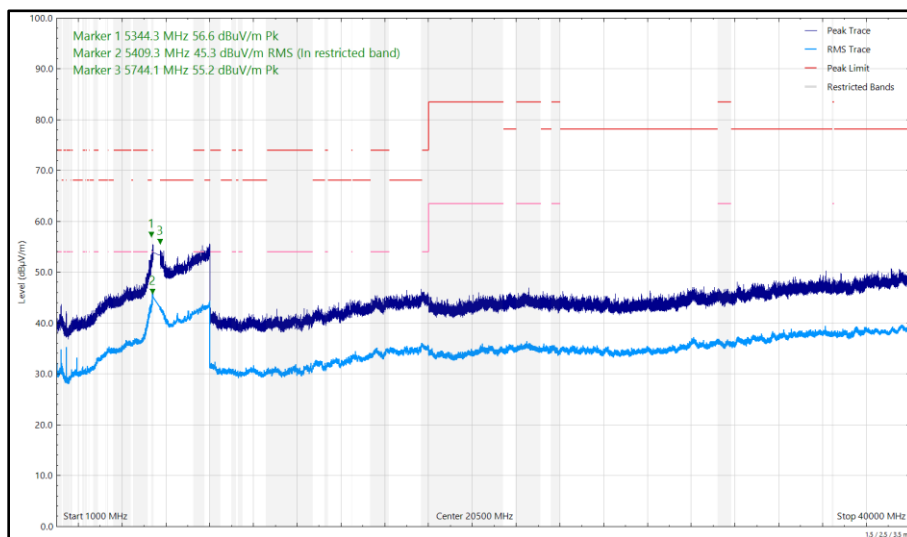


**Figure 670 - U-NII-2C - 5500 MHz (CH100), 802.11a, Core 1, 1 GHz to 40 GHz, Vertical**




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5429.583	42.82	54.00	-11.18	RMS	11	309	Vertical
5778.122	57.66	68.20	-10.54	Peak	10	292	Vertical

**Table 731 - U-NII-2C - 5700 MHz (CH140), 802.11a, Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

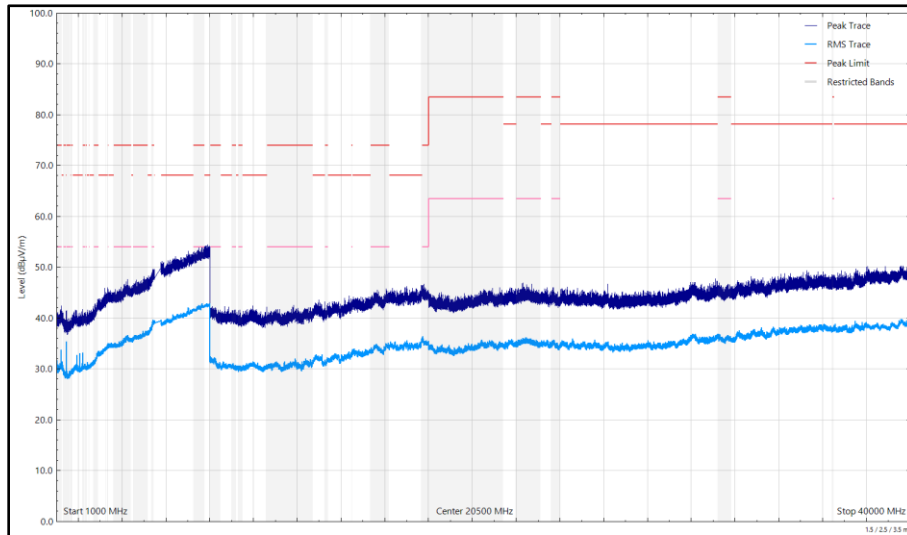

**Figure 671 - U-NII-2C - 5700 MHz (CH140), 802.11a, Core 1, 1 GHz to 40 GHz, Horizontal**

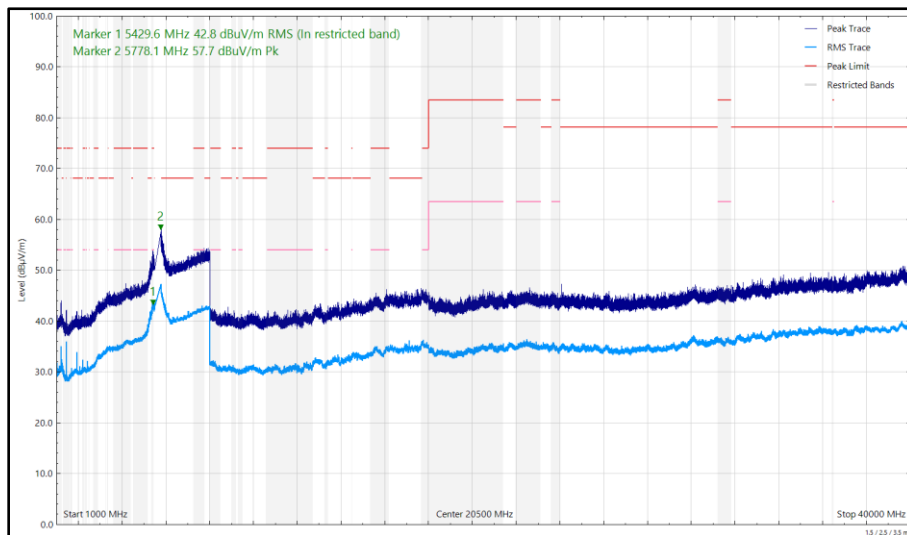


**Figure 672 - U-NII-2C - 5700 MHz (CH140), 802.11a, Core 1, 1 GHz to 40 GHz, Vertical**




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5445.949	42.18	54.00	-11.82	RMS	1	310	Vertical
5615.590	55.25	68.20	-12.95	Peak	12	244	Vertical
5854.633	57.90	68.20	-10.30	Peak	8	269	Vertical

**Table 732 - U-NII-3 - 5745 MHz (CH149), 802.11a, Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

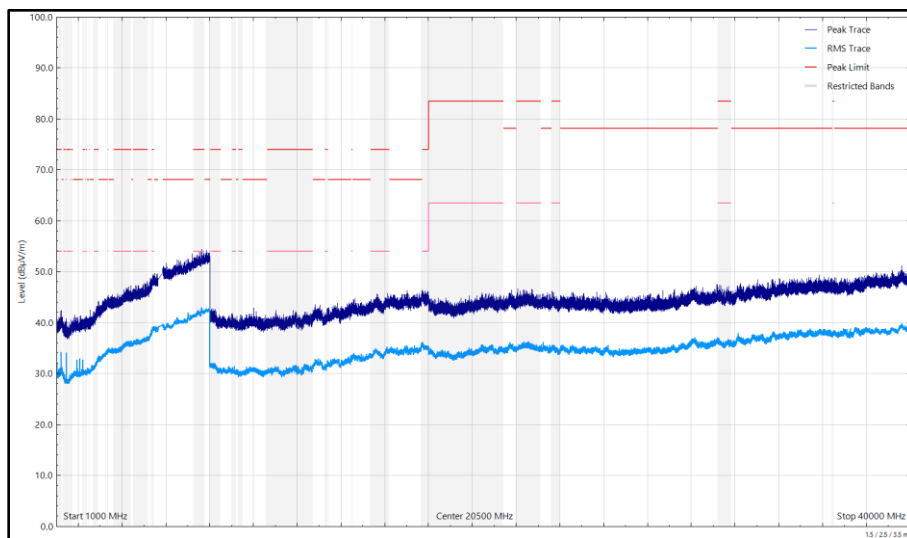

**Figure 673 - U-NII-3 - 5745 MHz (CH149), 802.11a, Core 1, 1 GHz to 40 GHz, Horizontal**

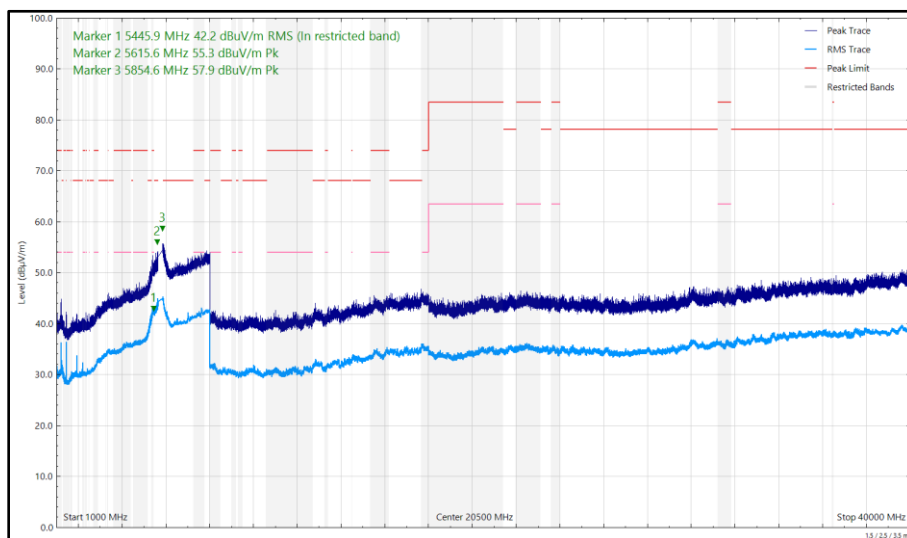

**Figure 674 - U-NII-3 - 5745 MHz (CH149), 802.11a, Core 1, 1 GHz to 40 GHz, Vertical**







Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5414.698	42.29	54.00	-11.71	RMS	7	328	Vertical
5721.048	56.54	68.20	-11.66	Peak	9	247	Vertical
5950.231	56.58	68.20	-11.62	Peak	8	273	Vertical

**Table 733 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 1, 30 MHz to 40 GHz**

No other emissions found within 10 dB of the limit.

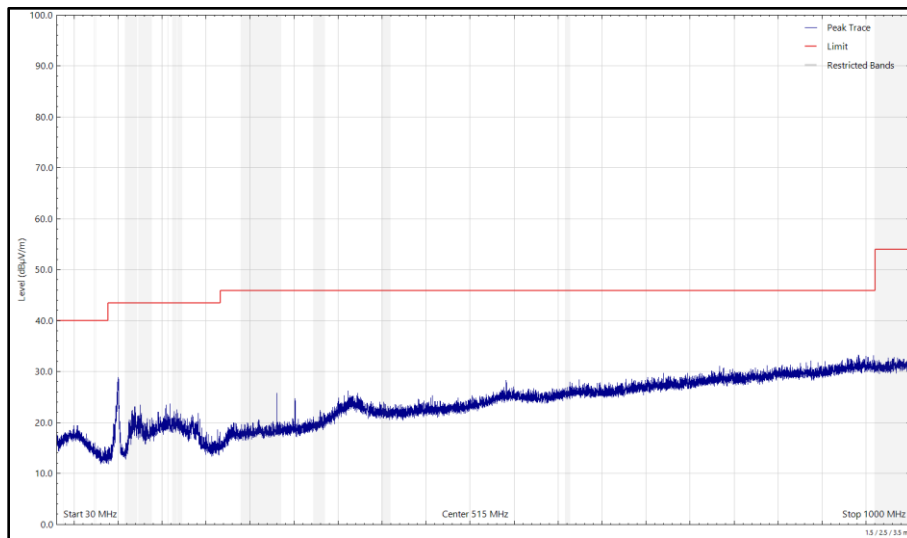

**Figure 675 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)**

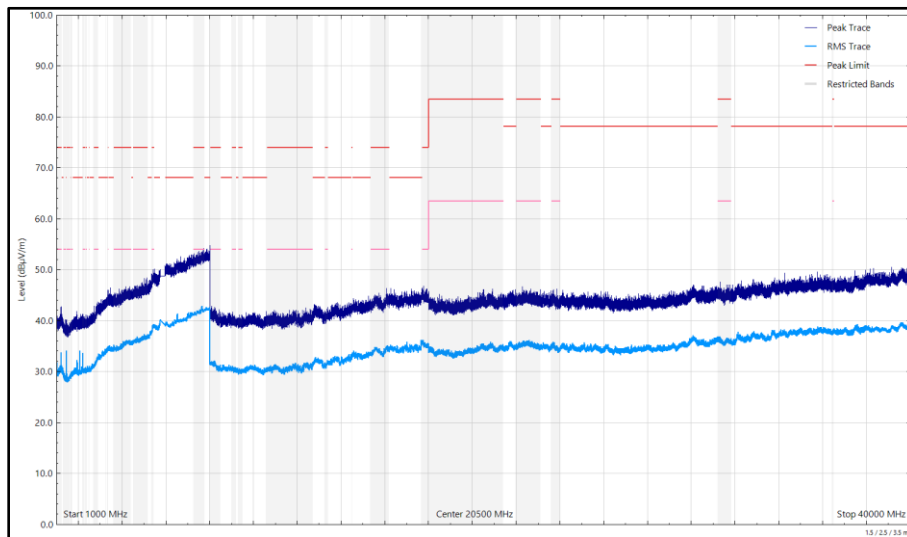

**Figure 676 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 1, 1 GHz to 40 GHz, Horizontal**

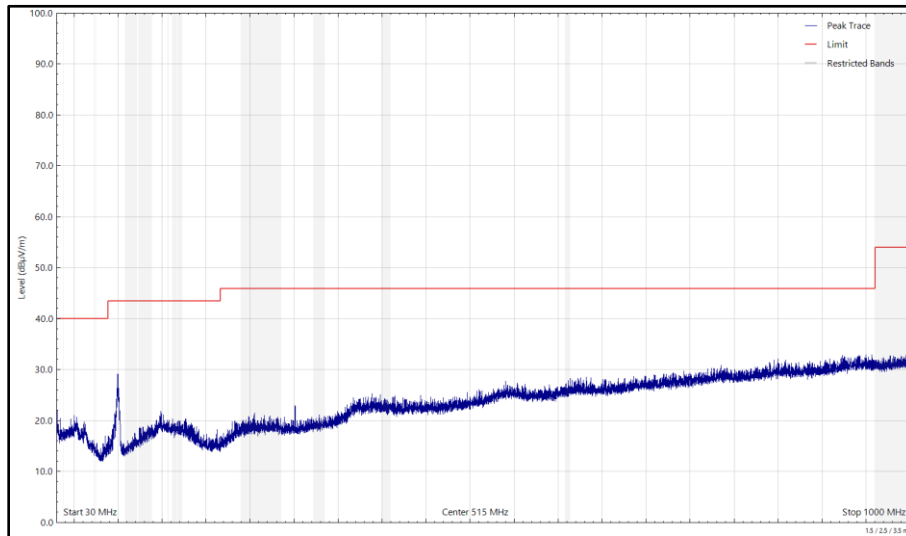


Figure 677 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

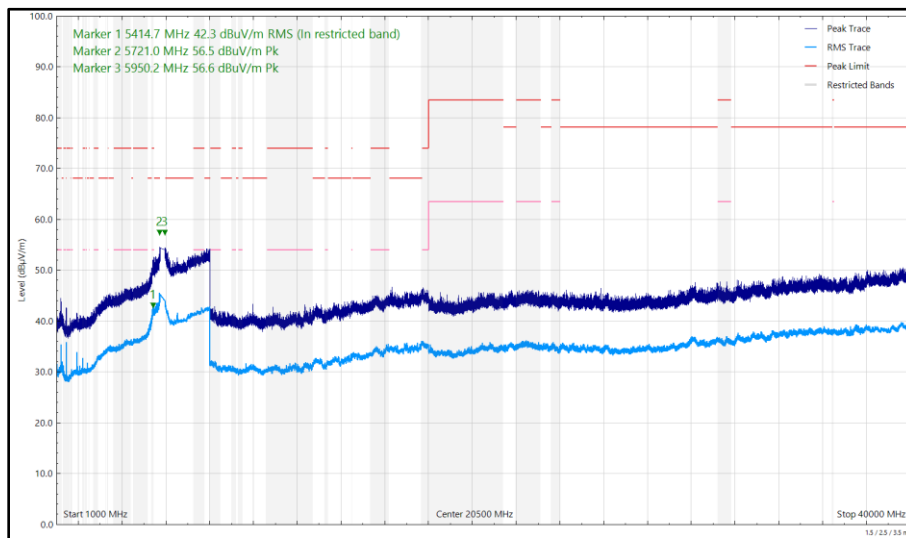



Figure 678 - U-NII-3 - 5825 MHz (CH165), 802.11a, Core 1, 1 GHz to 40 GHz, Vertical




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5109.763	45.51	54.00	-8.49	RMS	4	308	Vertical
5109.933	39.69	54.00	-14.31	RMS	67	389	Horizontal
5390.075	45.75	54.00	-8.25	RMS	350	306	Vertical
5404.691	41.27	54.00	-12.73	RMS	290	385	Horizontal
5510.711	55.64	68.20	-12.56	Peak	351	330	Vertical

**Table 734 - U-NII-1 - 5180 MHz (CH36), HT20, CDD, Core 0 + Core 1, 30 MHz to 40 GHz**

No other emissions found within 10 dB of the limit.

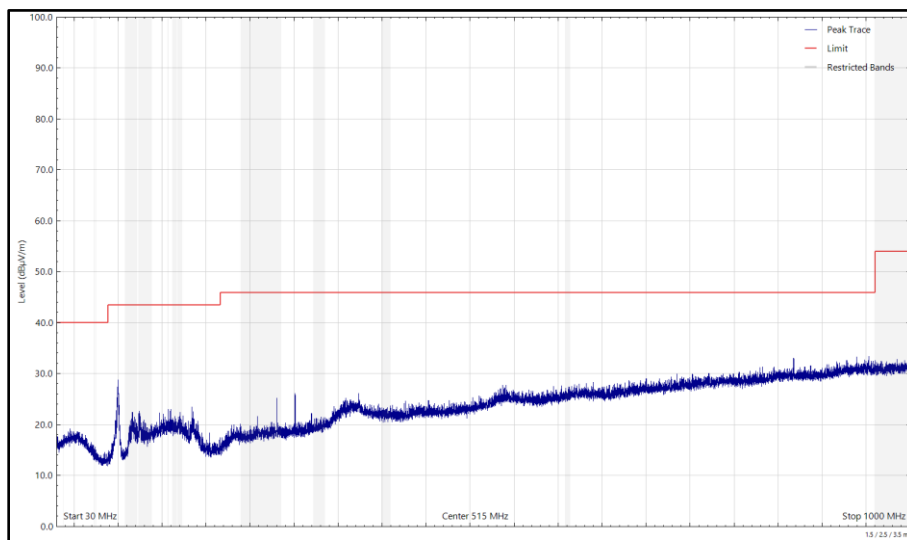

**Figure 679 - U-NII-1 - 5180 MHz (CH36), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)**

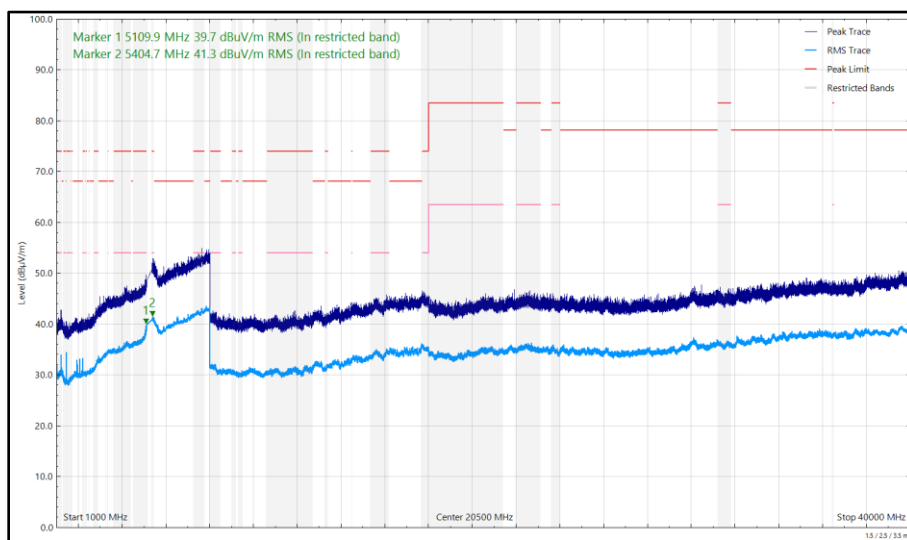

**Figure 680 - U-NII-1 - 5180 MHz (CH36), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

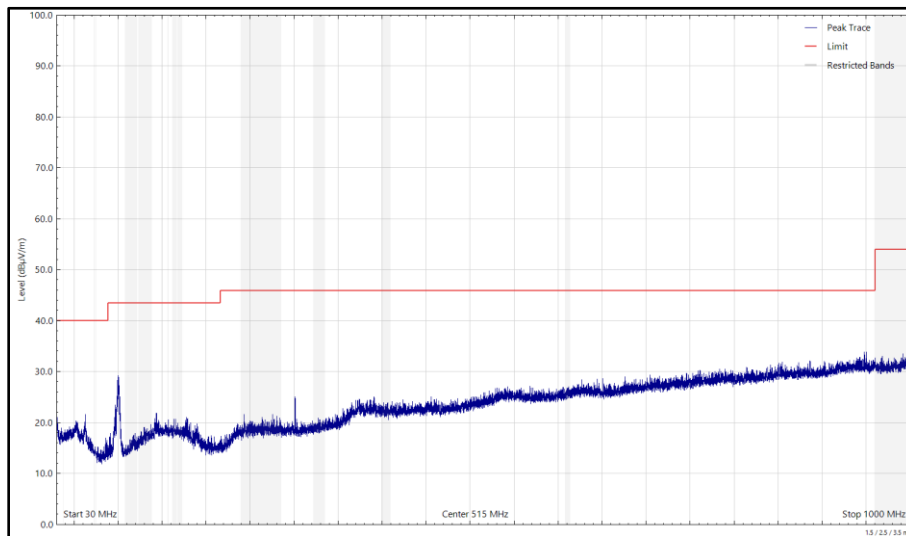


Figure 681 - U-NII-1 - 5180 MHz (CH36), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

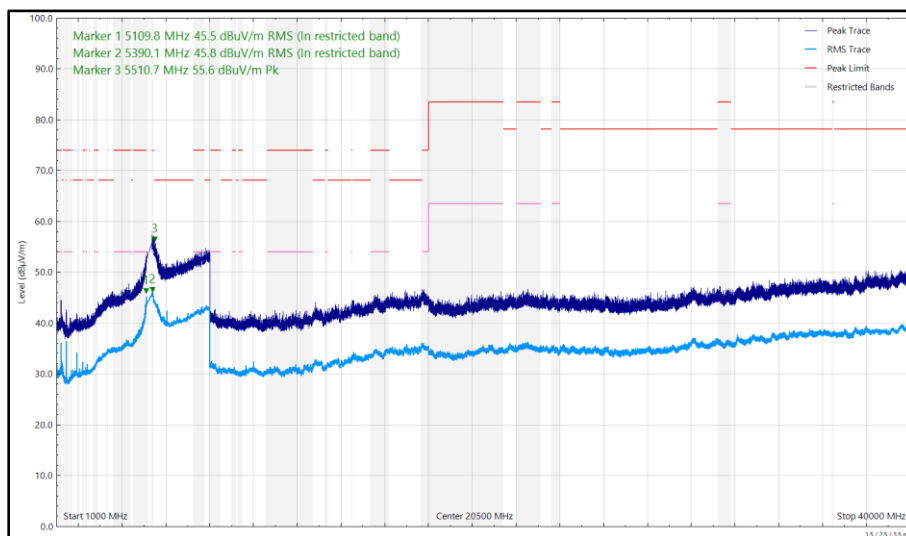



Figure 682 - U-NII-1 - 5180 MHz (CH36), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5148.586	43.86	54.00	-10.14	RMS	10	325	Vertical
5390.117	48.47	54.00	-5.53	RMS	349	301	Vertical
5390.822	43.31	54.00	-10.69	RMS	298	370	Horizontal
5396.393	59.96	74.00	-14.04	Peak	354	317	Vertical
5486.687	57.05	68.20	-11.15	Peak	11	255	Vertical
5488.695	53.82	68.20	-14.38	Peak	287	399	Horizontal

**Table 735 - U-NII-2A - 5320 MHz (CH64), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

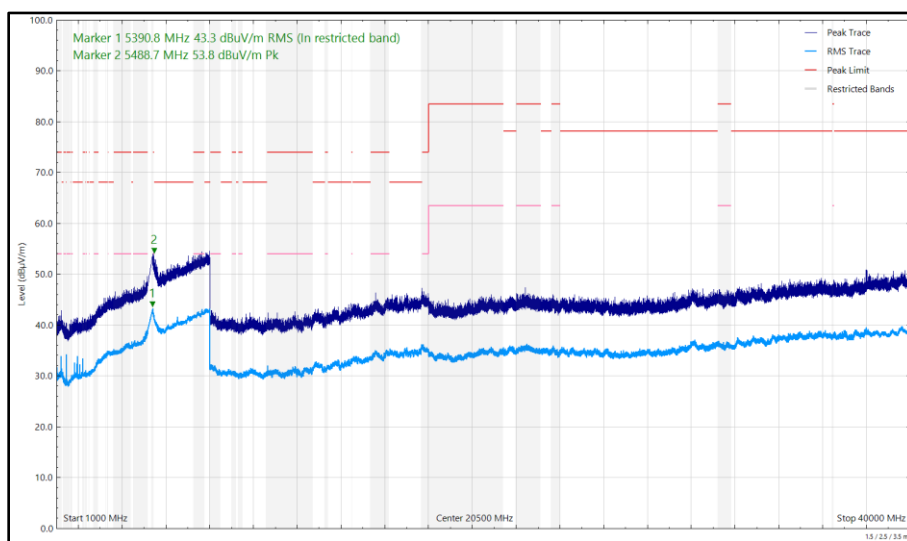

**Figure 683 - U-NII-2A - 5320 MHz (CH64), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

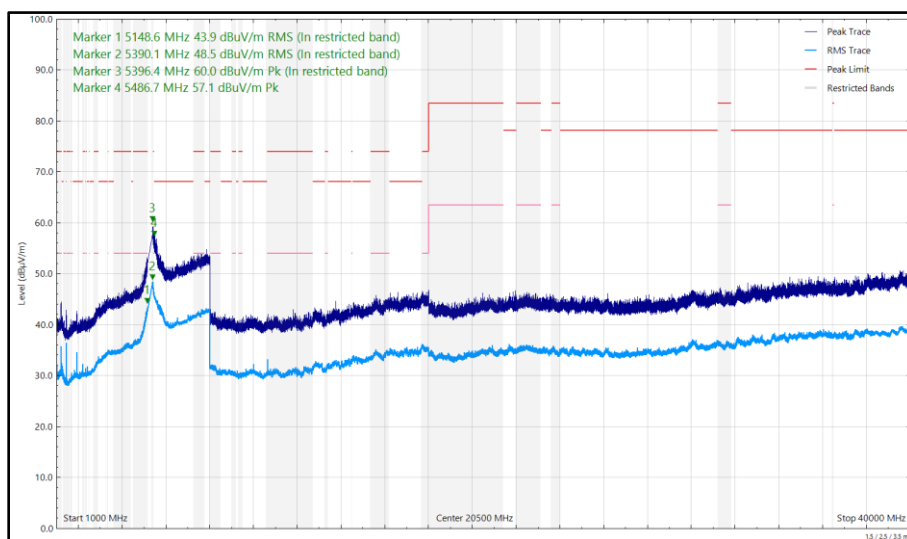


**Figure 684 - U-NII-2A - 5320 MHz (CH64), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical**




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5344.739	58.42	68.20	-9.78	Peak	343	306	Vertical
5395.893	46.91	54.00	-7.09	RMS	348	342	Vertical
5401.869	59.29	74.00	-14.71	Peak	352	326	Vertical
5406.859	42.65	54.00	-11.35	RMS	296	396	Horizontal
5728.163	55.54	68.20	-12.66	Peak	12	282	Vertical

**Table 736 - U-NII-2C - 5500 MHz (CH100), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

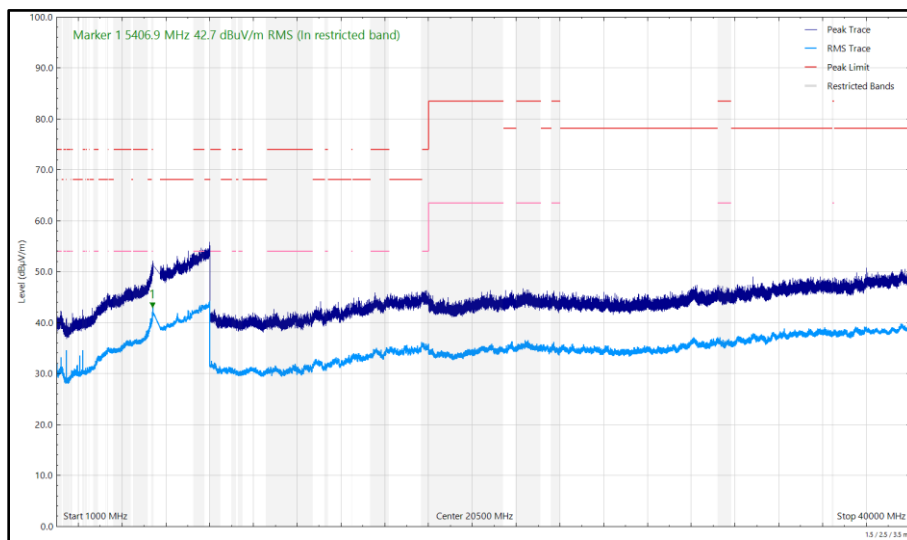

**Figure 685 - U-NII-2C - 5500 MHz (CH100), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

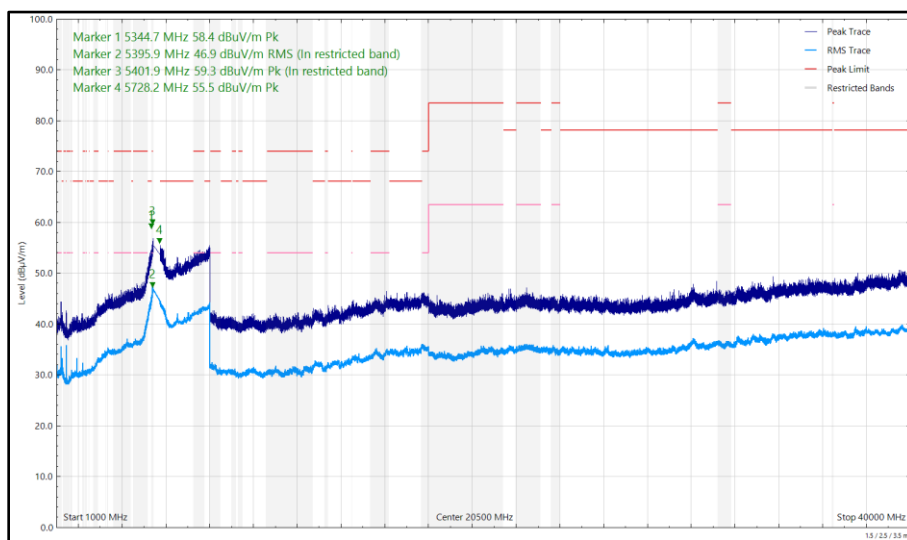


**Figure 686 - U-NII-2C - 5500 MHz (CH100), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical**




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5394.793	43.62	54.00	-10.38	RMS	3	294	Vertical
5446.968	41.34	54.00	-12.66	RMS	296	388	Horizontal
5461.828	57.17	68.20	-11.03	Peak	353	322	Vertical
5764.076	60.38	68.20	-7.82	Peak	7	243	Vertical

**Table 737 - U-NII-2C - 5700 MHz (CH140), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

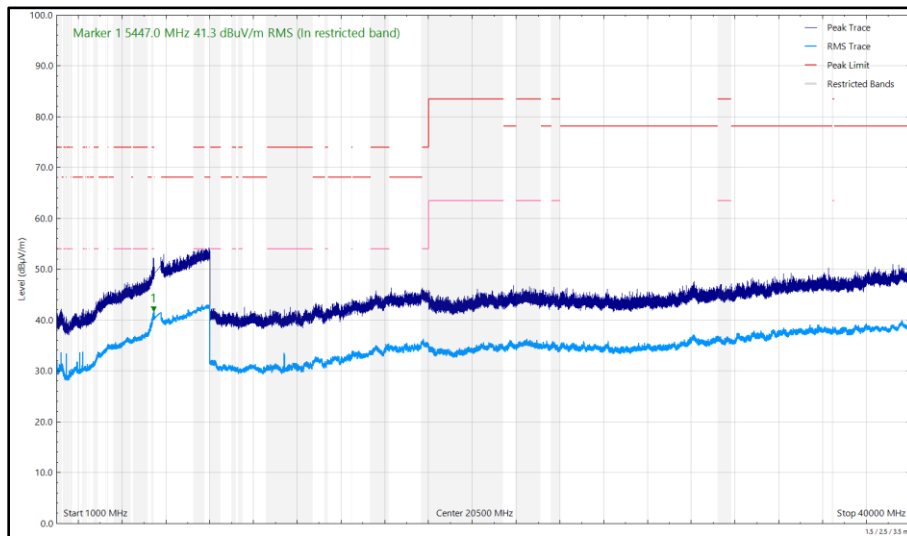

**Figure 687 - U-NII-2C - 5700 MHz (CH140), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

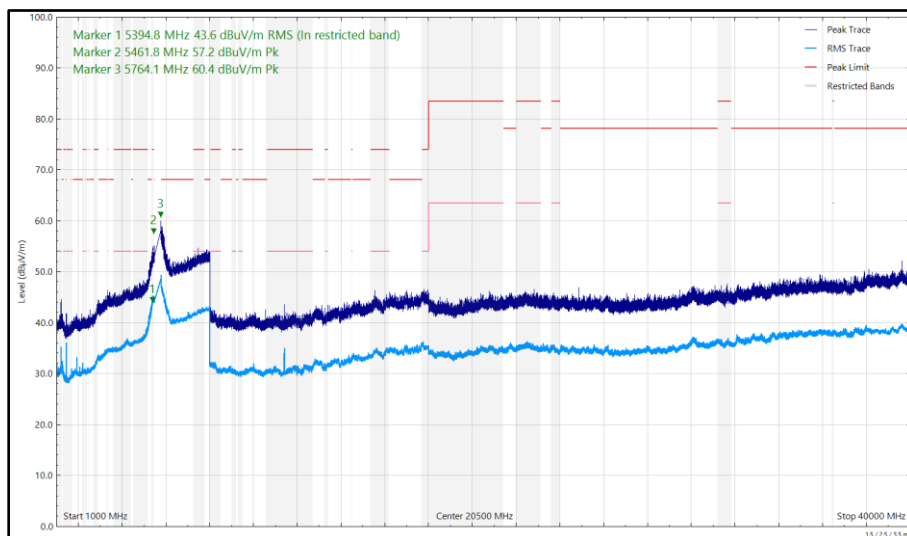


**Figure 688 - U-NII-2C - 5700 MHz (CH140), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical**




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5436.713	43.67	54.00	-10.33	RMS	358	246	Vertical
5458.053	39.97	54.00	-14.03	RMS	298	323	Horizontal
5616.268	57.89	68.20	-10.31	Peak	10	256	Vertical
5870.566	58.58	68.20	-9.62	Peak	354	274	Vertical

**Table 738 - U-NII-3 - 5745 MHz (CH149), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

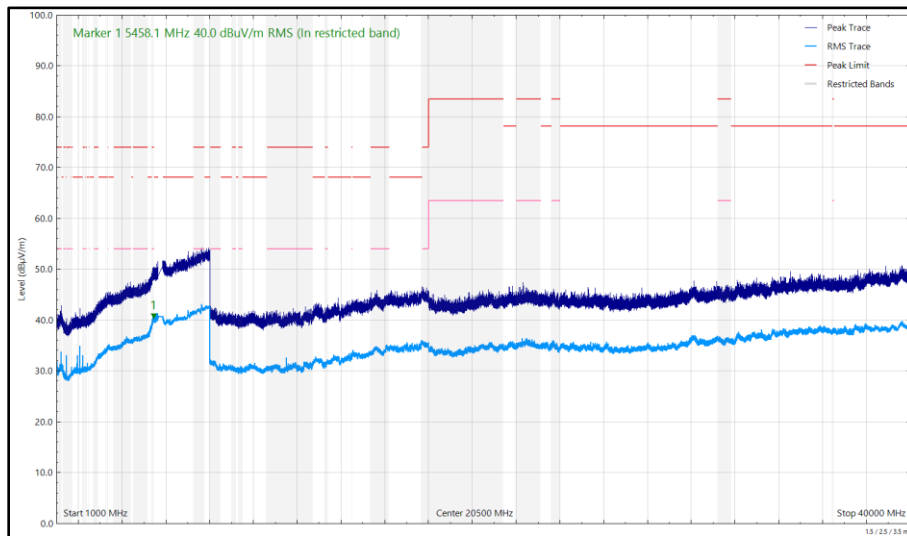

**Figure 689 - U-NII-3 - 5745 MHz (CH149), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

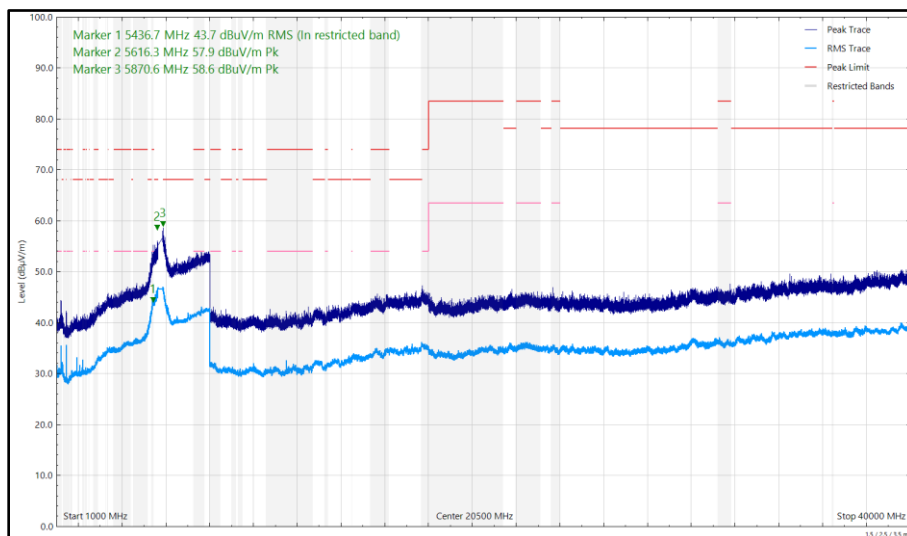

**Figure 690 - U-NII-3 - 5745 MHz (CH149), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical**







Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5439.515	43.45	54.00	-10.55	RMS	4	329	Vertical
5448.463	39.74	54.00	-14.26	RMS	302	346	Horizontal
5595.491	56.98	68.20	-11.22	Peak	5	250	Vertical
5717.494	53.58	68.20	-14.62	Peak	297	391	Horizontal
5951.083	56.35	68.20	-11.85	Peak	348	260	Vertical

**Table 739 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 30 MHz to 40 GHz**

No other emissions found within 10 dB of the limit.

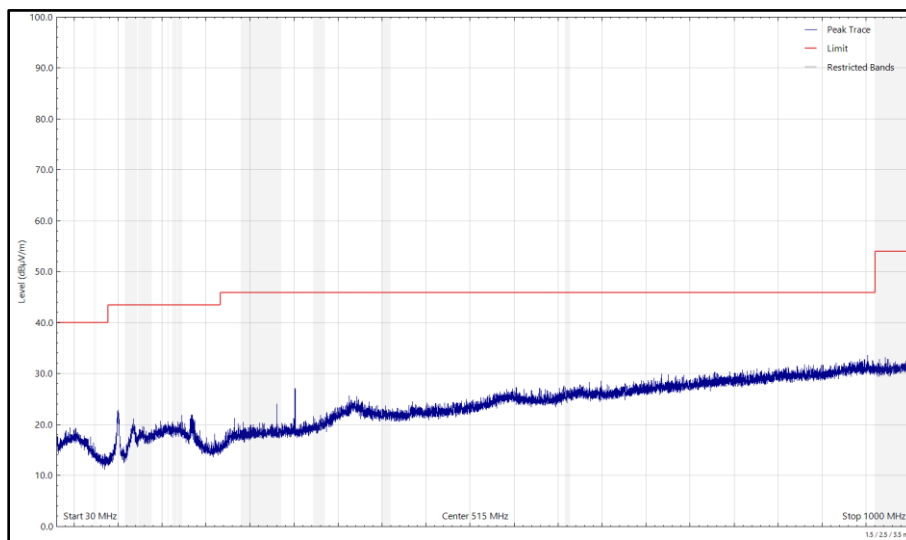

**Figure 691 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)**

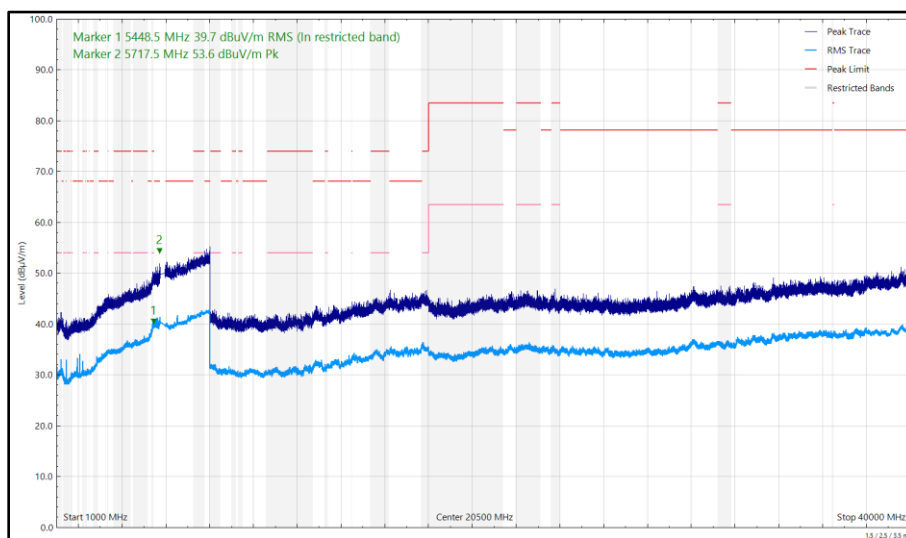

**Figure 692 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

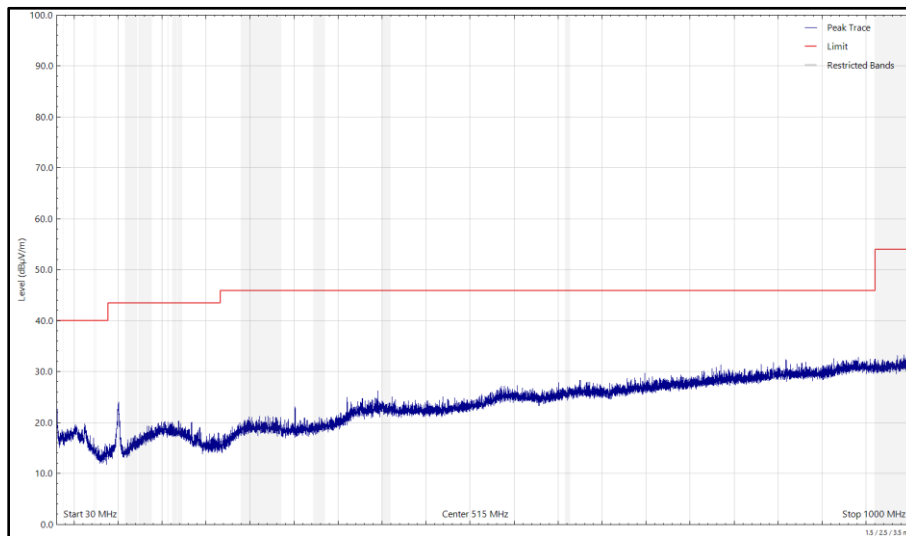


Figure 693 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

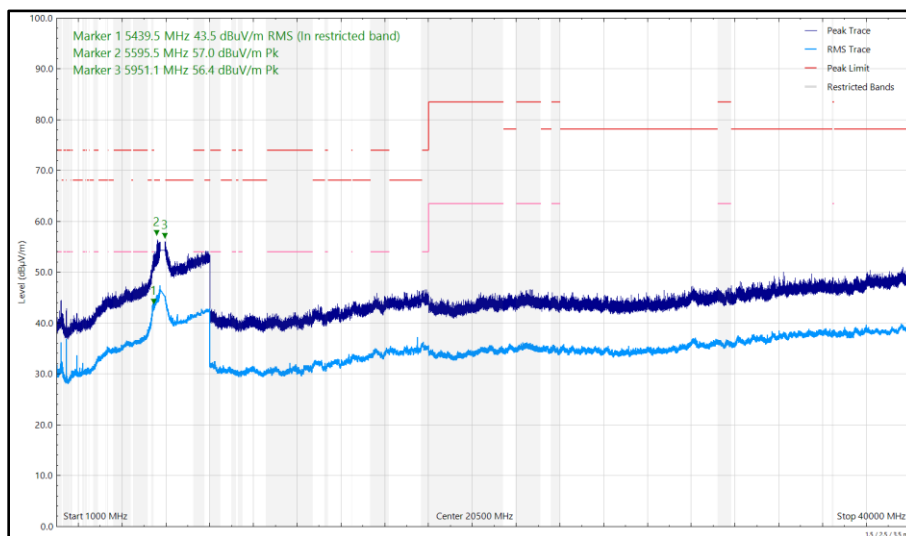



Figure 694 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5107.239	39.01	54.00	-14.99	RMS	72	382	Horizontal
5109.954	45.45	54.00	-8.55	RMS	5	308	Vertical
5383.344	45.85	54.00	-8.15	RMS	351	335	Vertical
5384.662	41.57	54.00	-12.43	RMS	296	398	Horizontal
5465.382	56.41	68.20	-11.79	Peak	2	229	Vertical

**Table 740 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 40 GHz**

No other emissions found within 10 dB of the limit.

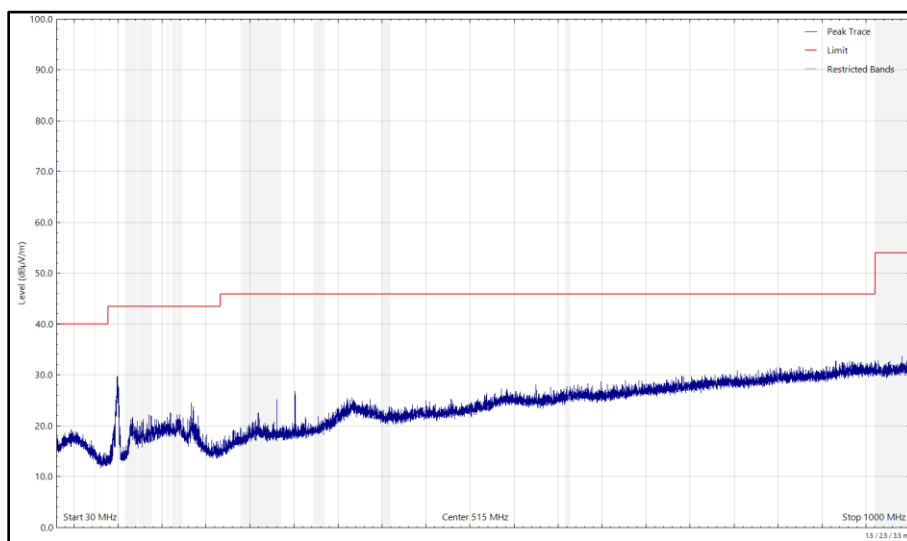

**Figure 695 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)**

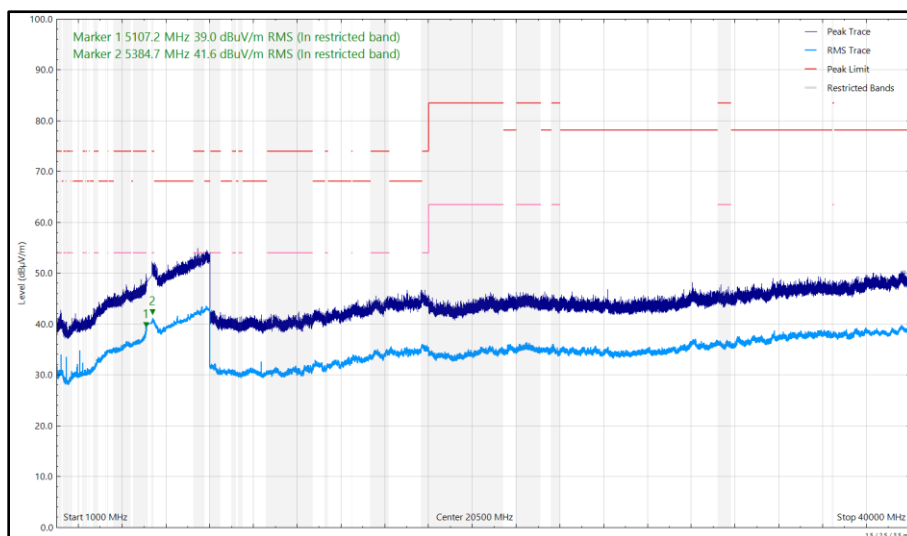

**Figure 696 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

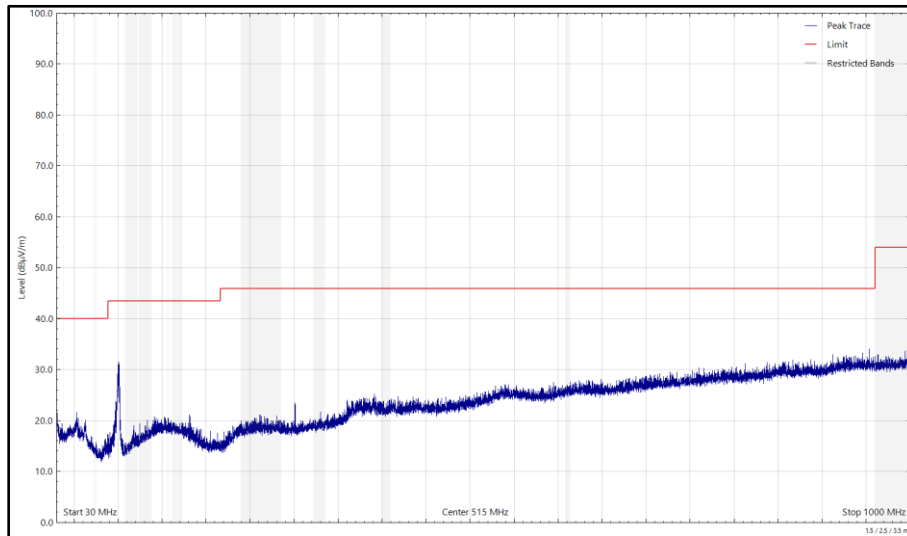


Figure 697 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

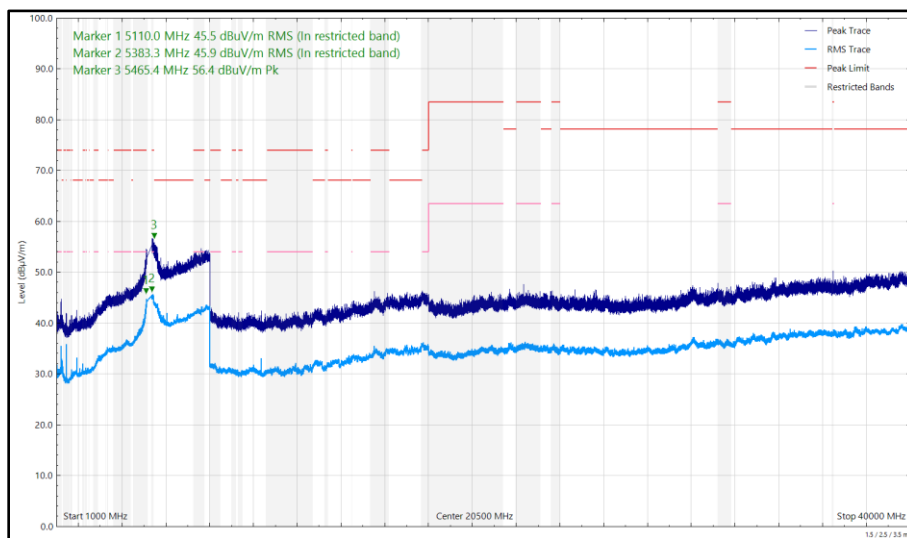



Figure 698 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical



Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5146.791	43.30	54.00	-10.70	RMS	335	282	Vertical
5390.008	48.23	54.00	-5.77	RMS	351	315	Vertical
5390.633	42.96	54.00	-11.04	RMS	297	369	Horizontal
5393.067	60.17	74.00	-13.83	Peak	3	316	Vertical
5462.814	53.98	68.20	-14.22	Peak	292	384	Horizontal
5469.924	56.85	68.20	-11.35	Peak	353	332	Vertical

**Table 741 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

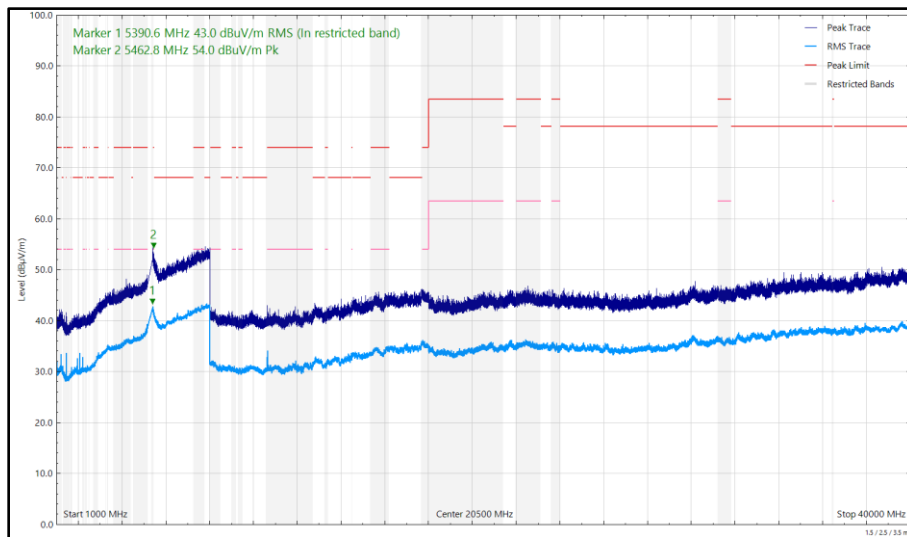

**Figure 699 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

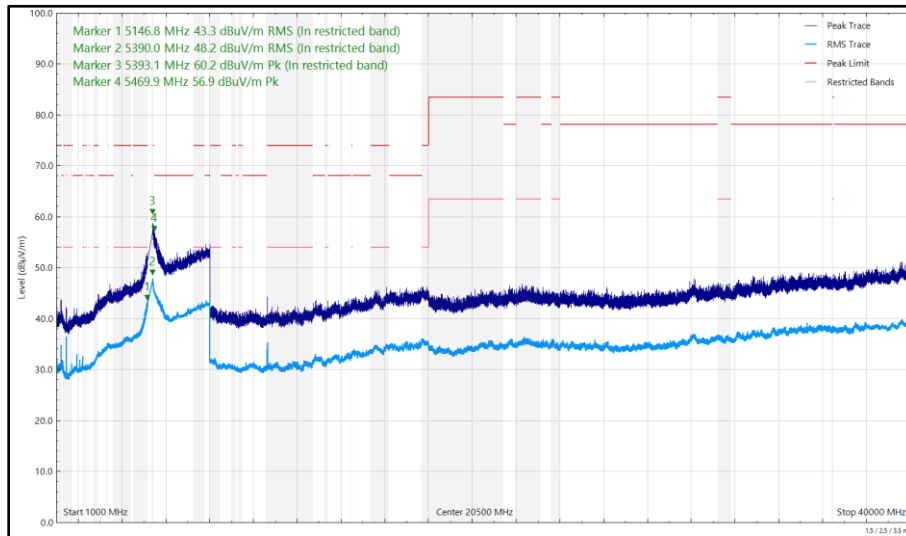



Figure 700 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5336.466	57.99	68.20	-10.21	Peak	349	317	Vertical
5406.550	42.50	54.00	-11.50	RMS	294	391	Horizontal
5407.440	60.00	74.00	-14.00	Peak	350	312	Vertical
5408.650	46.73	54.00	-7.27	RMS	353	326	Vertical
5737.620	56.14	68.20	-12.06	Peak	7	250	Vertical

**Table 742 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

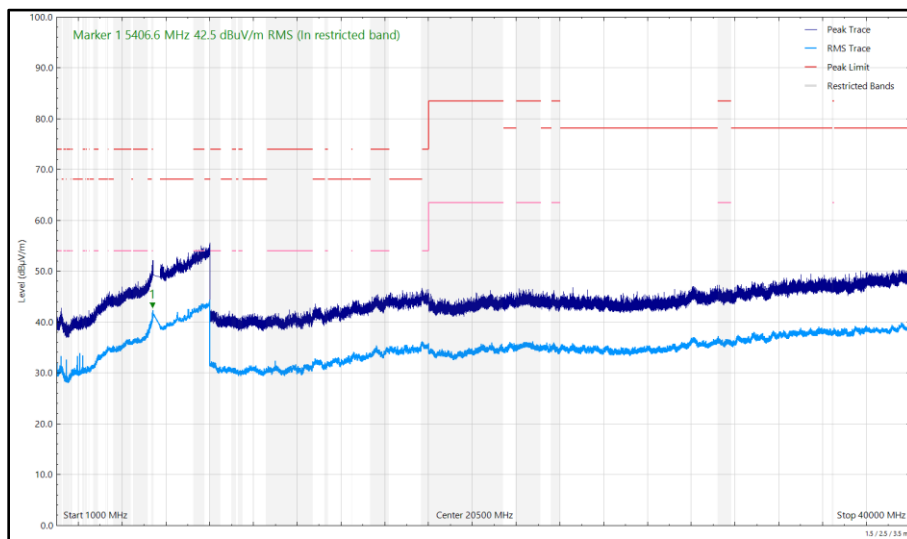

**Figure 701 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

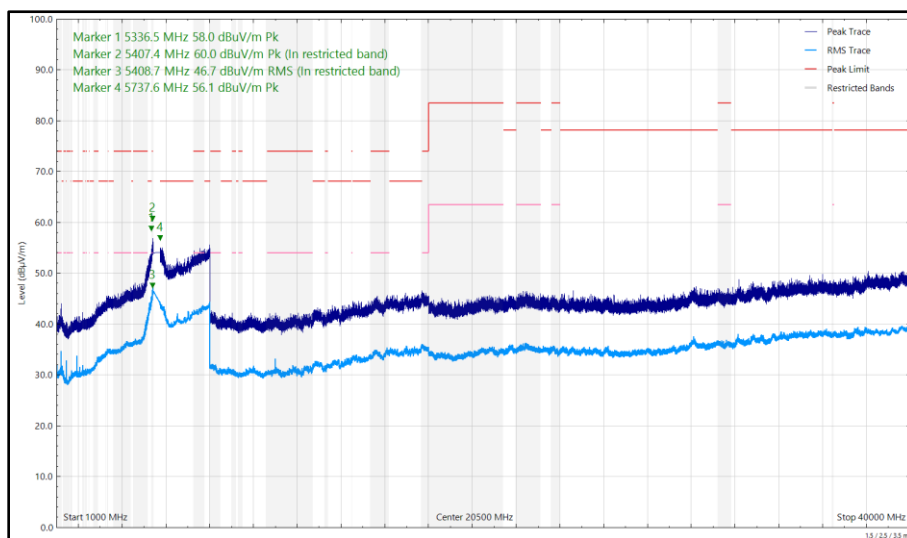


**Figure 702 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical**




Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5406.988	44.53	54.00	-9.47	RMS	351	347	Vertical
5451.853	41.02	54.00	-12.98	RMS	296	382	Horizontal
5462.666	57.42	68.20	-10.78	Peak	352	341	Vertical
5462.699	53.41	68.20	-14.79	Peak	294	386	Horizontal
5762.154	60.54	68.20	-7.66	Peak	8	262	Vertical

**Table 743 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

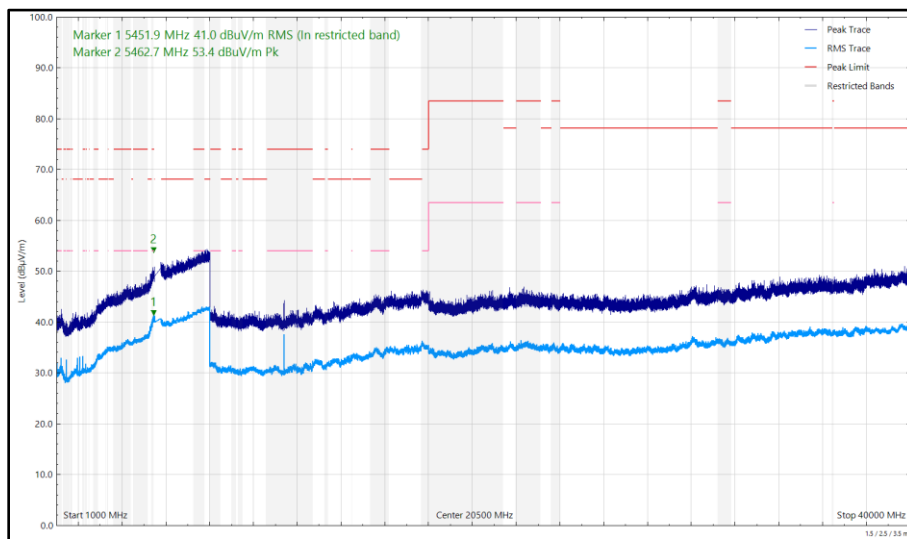

**Figure 703 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

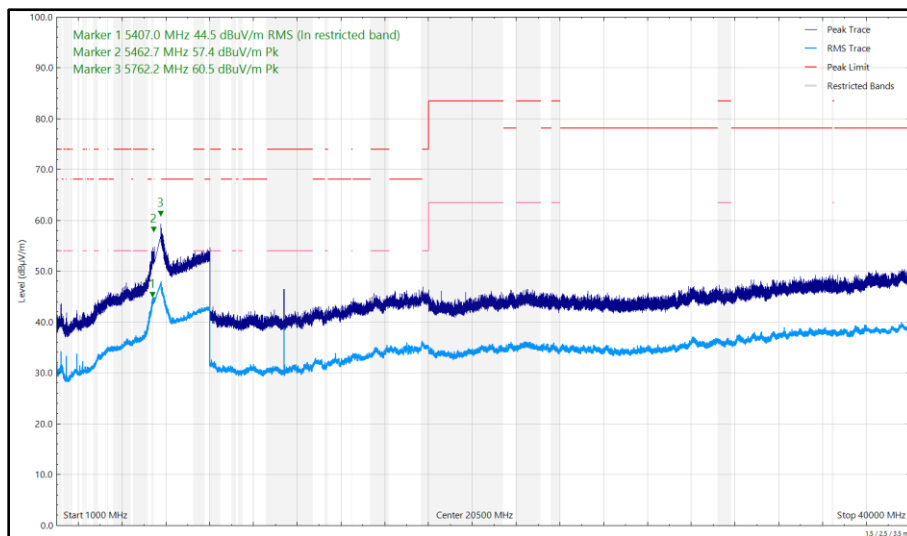

**Figure 704 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical**







Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5444.563	40.14	54.00	-13.86	RMS	299	398	Horizontal
5446.164	44.60	54.00	-9.40	RMS	352	325	Vertical
5492.051	53.29	68.20	-14.91	Peak	295	397	Horizontal
5592.408	57.50	68.20	-10.70	Peak	5	253	Vertical
5855.450	58.51	68.20	-9.69	Peak	356	257	Vertical
17209.450	53.54	68.20	-14.66	Peak	134	107	Vertical
17210.640	53.52	68.20	-14.68	Peak	92	350	Horizontal

**Table 744 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

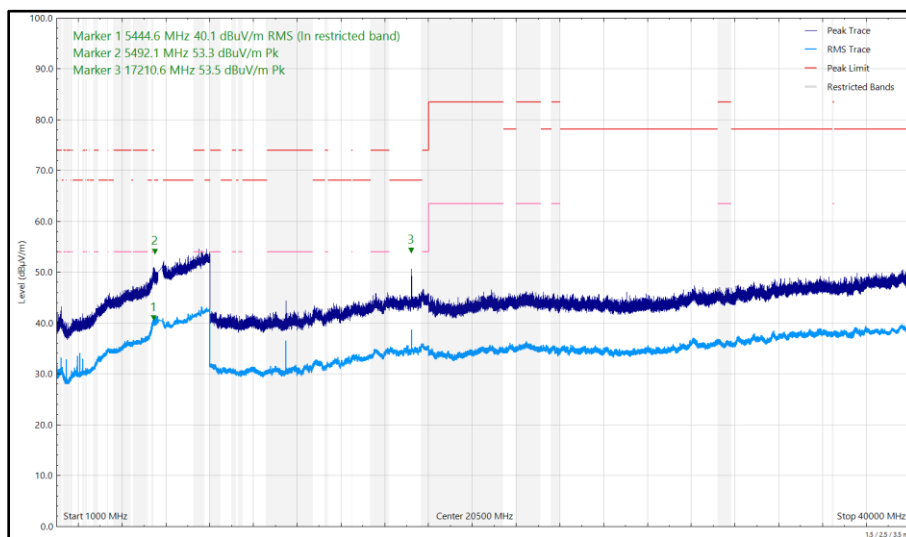

**Figure 705 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal**

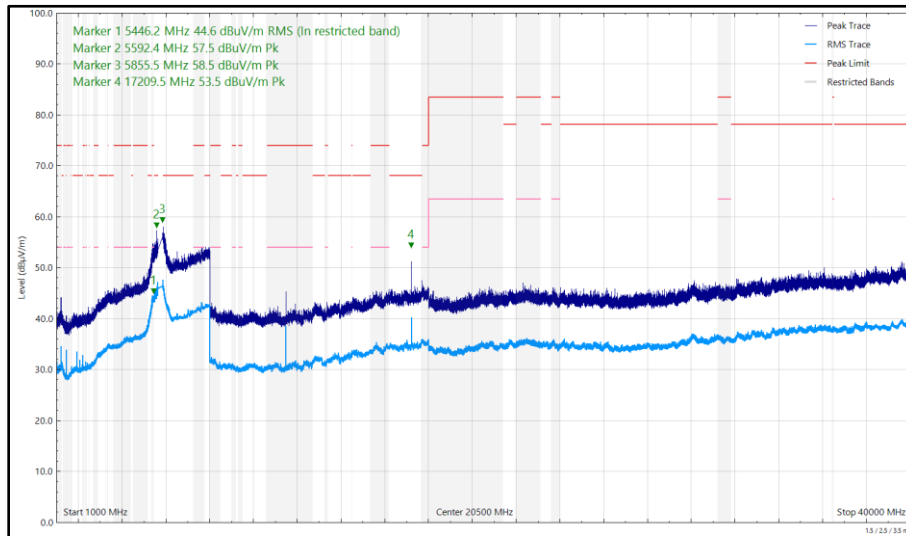


**Figure 706 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical**



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5444.696	42.69	54.00	-11.31	RMS	357	291	Vertical
5451.400	39.99	54.00	-14.01	RMS	286	389	Horizontal
5697.125	53.60	68.20	-14.60	Peak	292	400	Horizontal
5723.985	59.05	68.20	-9.15	Peak	4	238	Vertical
5961.550	56.35	68.20	-11.85	Peak	349	273	Vertical
17449.440	55.22	68.20	-12.98	Peak	211	100	Vertical

**Table 745 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 40 GHz**

No other emissions found within 10 dB of the limit.

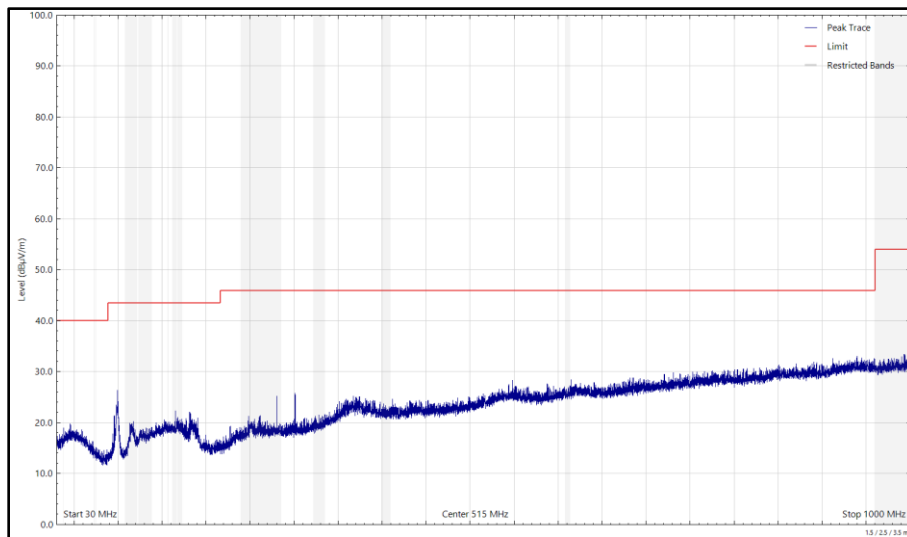

**Figure 707 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)**

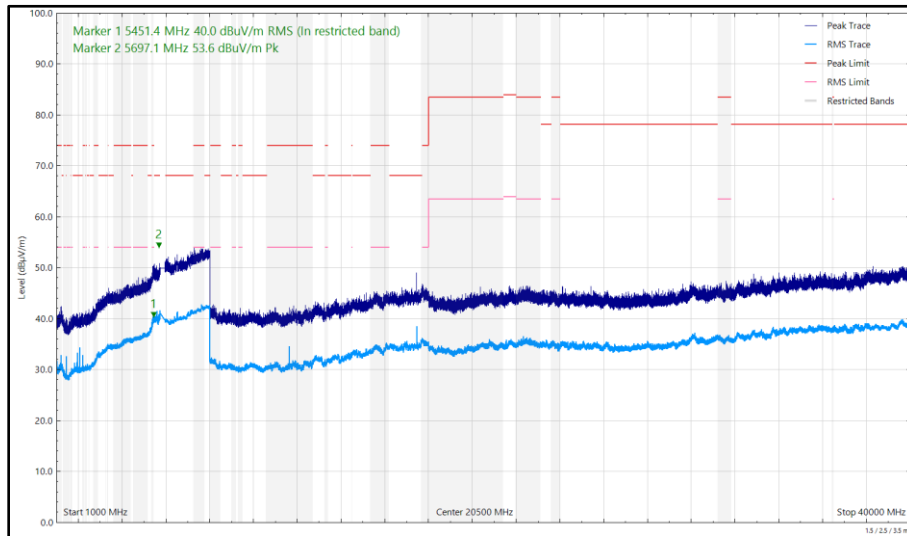


Figure 708 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal


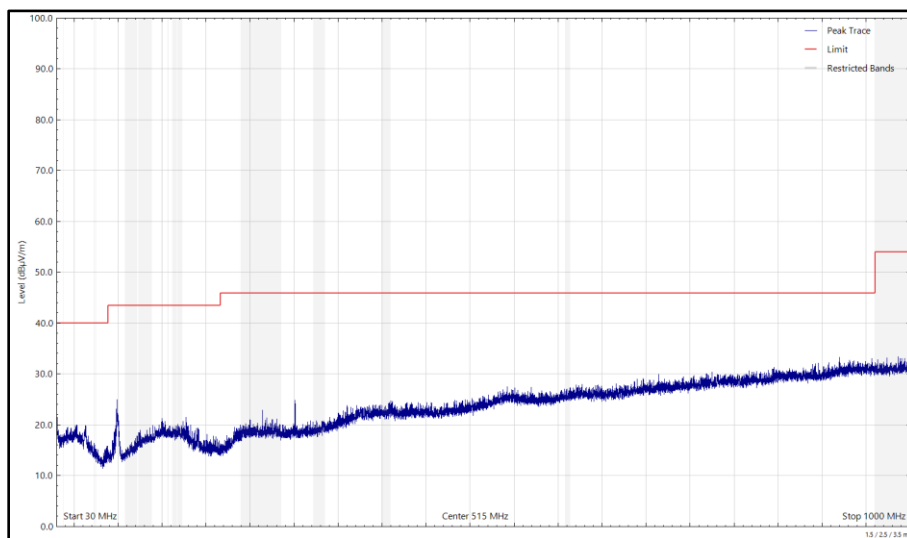


Figure 709 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

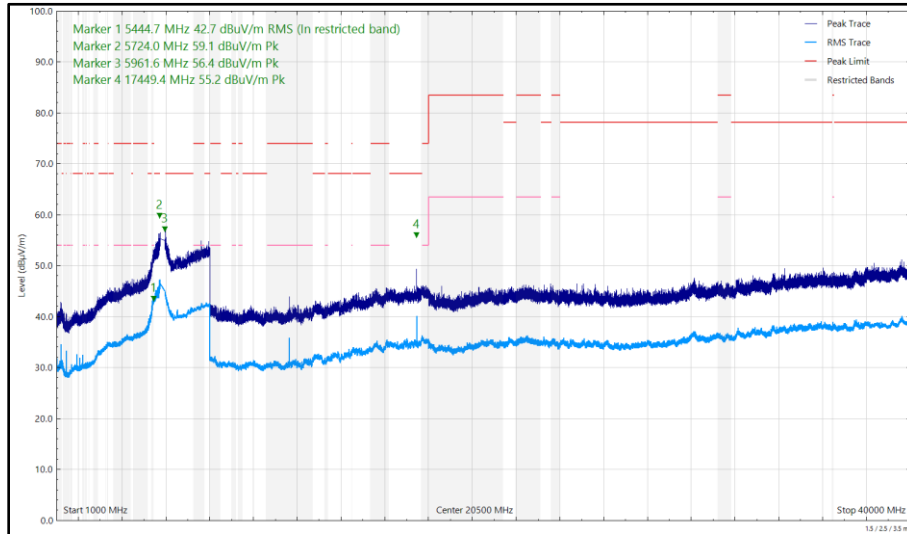

**Figure 710 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical**

FCC 47 CFR Part 15, Limit Clause 15.407(b)(1)(2)(3)(4)

Emissions not falling within the restricted bands listed in FCC 47 CFR Part 15.209:

For transmitters operating in the 5.15-5.25 GHz band:  $\leq -27$  dBm/MHz outside 5150-5350 MHz.

For transmitters operating in the 5.25-5.35 GHz band:  $\leq -27$  dBm/MHz outside 5150-5350 MHz.

For transmitters operating in the 5.47-5.725 GHz band:  $\leq -27$  dBm/MHz outside 5470-5725 MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Emissions within the restricted bands listed in FCC 47 CFR Part 15.209:

Frequency (MHz)	Field Strength ( $\mu$ V/m) at 3m	Field Strength Limit (dB $\mu$ V/m) at 3m
30 to 88	100	40.00
88 to 216	150	43.52
216 to 960	200	46.02
Above 960	500	53.98

**Table 746 - Radiated Emissions Limit Table (FCC)**



### 2.6.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 and RF Chamber 17.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5935	12	10-Jun-2025
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5939	12	5-May-2025
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5943	24	24-May-2026
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6006	12	20-May-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	20-May-2025
Cable (N to N 3m)	Junkosha	MWX221-03000NMSNMS/A	6025	12	20-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	5-May-2025
Digital Multimeter	Fluke	115	6146	12	6-Jun-2025
Humidity & Temperature meter	R.S Components	1364	6149	12	12-Aug-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	22-Dec-2024
Attenuator 4dB	Pasternack	PE7074-4	6201	24	24-May-2026
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	6-Jan-2025
USB Spectrum Analyser	Signal Hound	SA124B	6296	-	TU
USB Spectrum Analyser	Signal Hound	SA124B	6298	-	TU
EMC Test Receiver	Rohde & Schwarz	ESW44	6333	12	16-Feb-2025
Digital Multimeter	Fluke	115	6345	12	24-Jul-2025
Humidity and Temperature Meter	R.S Components	1364	6346	12	6-Mar-2025
8 GHz High Pass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6427	12	23-Apr-2025
Coax cable SMA to SMA with N-Type adapter	TUV SUD	N/A	6637	12	23-Apr-2025
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	28-Jan-2026



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6741	12	1-Feb-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6771	24	17-Jan-2025
Pre-Amp 8 - 18 GHz	Wright Technologies	APS06-0061	6783	12	23-Apr-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6834	12	14-Aug-2025

**Table 747**

TU - Traceability Unscheduled  
O/P Mon - Output Monitored using calibrated equipment



## **2.7 Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period**

### **2.7.1 Specification Reference**

FCC 47 CFR Part 15E, Clause 15.407 (h)(2)(iii)(iv)

### **2.7.2 Equipment Under Test and Modification State**

A3185, S/N: Lfv559F6QK - Modification State 0

### **2.7.3 Date of Test**

06-September-2024

### **2.7.4 Test Method**

This test was performed in accordance with FCC KDB 905462 D02, clause 7.8.3.

Radar Pulse Type 0 was then transmitted, and the Spectrum monitored. The transmissions from the UUT were observed for a period of 12 seconds after the final injected Radar Pulse.

It was checked that all transmissions stopped within the 10 second period defined from the point of the end of the final Radar pulse + 10 seconds. In addition, the aggregate on time during the first 200ms and the following 9.8 seconds of the Channel Move Time was computed.

The markers on the trace data correspond to the following time periods:

Yellow - End Of Radar Burst, (T0)

Purple - End Of Channel Move Time, (T0 + 10 seconds)

To verify the non-occupancy period, the external trigger was used to trigger a 30-minute sweep from the moment the radar burst sequence was injected. It was verified that no transmissions occurred on the test channel during this time period.

### **2.7.5 Environmental Conditions**

Ambient Temperature	22.7 - 23.3 °C
Relative Humidity	34.3 - 43.4 %



**2.7.6 Test Results**

5 GHz WLAN – Master to Client

The equipment under test was a Client without Radar Detection.

This test was performed in the following mode of operation: 802.11ac VHT160.

The equipment was set up as shown in the diagram below. The test laptop was configured to run iPerf, transmitting UDP data to the EUT via the DFS Master. The channel loading was set to >17% by adjusting the bandwidth specified in the iPerf UDP transfer.


To calibrate the level of the radar at the input to the companion device, the companion device was replaced by the spectrum analyser and the output of the vector signal generator adjusted to give -62 dBm.

Radar Type	Pulse Width (µs)	PRI (µs)	Number of Pulses
0	1	1428	18

**Table 748 - Radar Pulse Type 0 Characteristics**

Manufacturer	Model	Serial Number	FCC ID
ASUS	GT-AXE11000	N5IG0X400280MY7	MSQ-RTAXJF00

**Table 749 - Details of Master Device used to support testing**

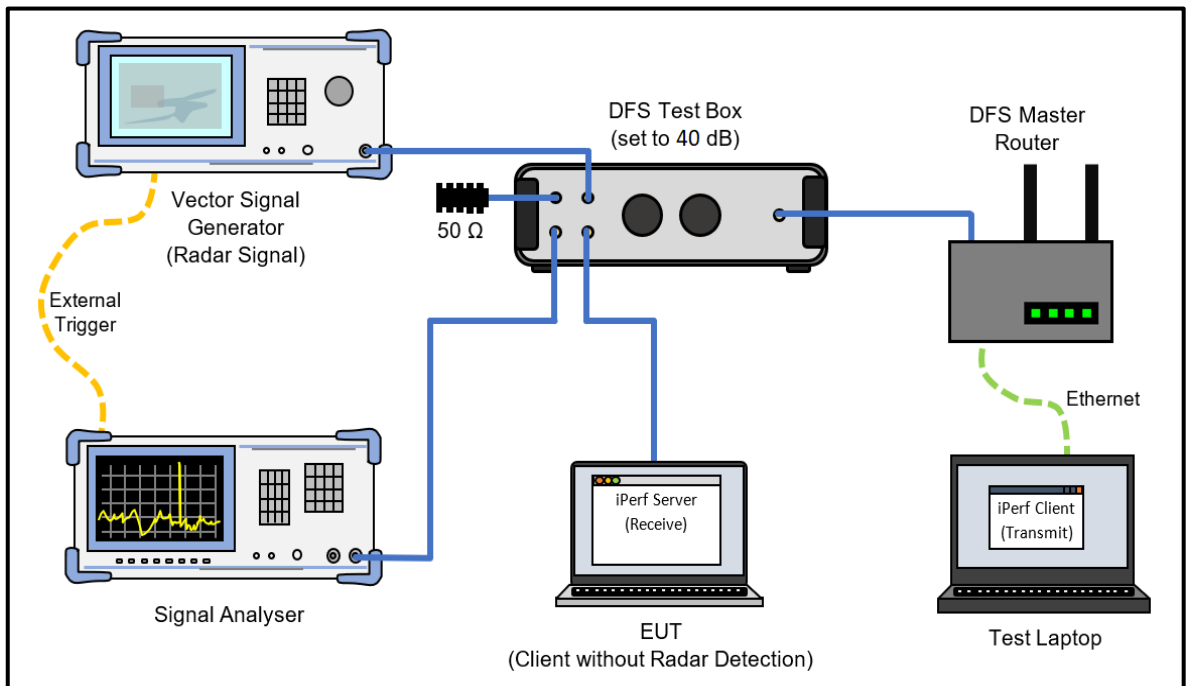

**Figure 711 - Test Equipment Setup Diagram for Client without Radar Detection with Injection at the Master**



Figure 712 - Verification of Radar Type 0

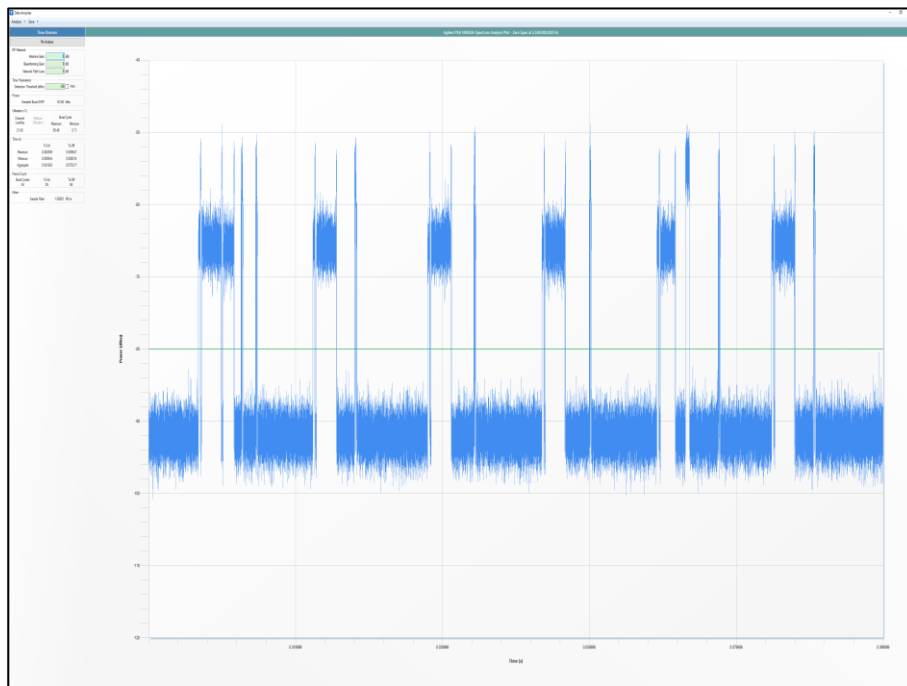


Figure 713 - Channel Loading

The channel loading was 21.68%




Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

**Table 750 - DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection**

Test Parameter	Result
Test Channel	CH114 (5570 MHz), Control CH100 (5500 MHz)
Channel Move Time	0.035
Channel Closing Time (Aggregate Time During 200 ms)	0.010
Channel Closing Time (Aggregate Time During 200 ms to 10 s)	0.000
Channel Closing Time (Aggregate Time During 10 s)	0.010
Transmission Observed During Non-Occupancy Period	No

**Table 751 - In-Service Monitoring Test Results**

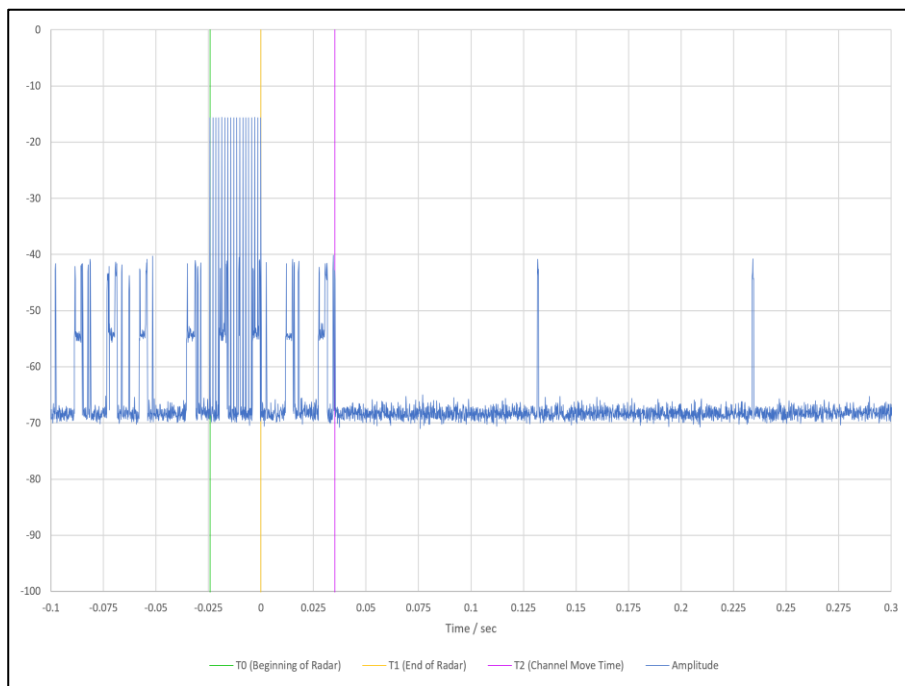

**Figure 714 - First 200 ms of Channel Shutdown Period**

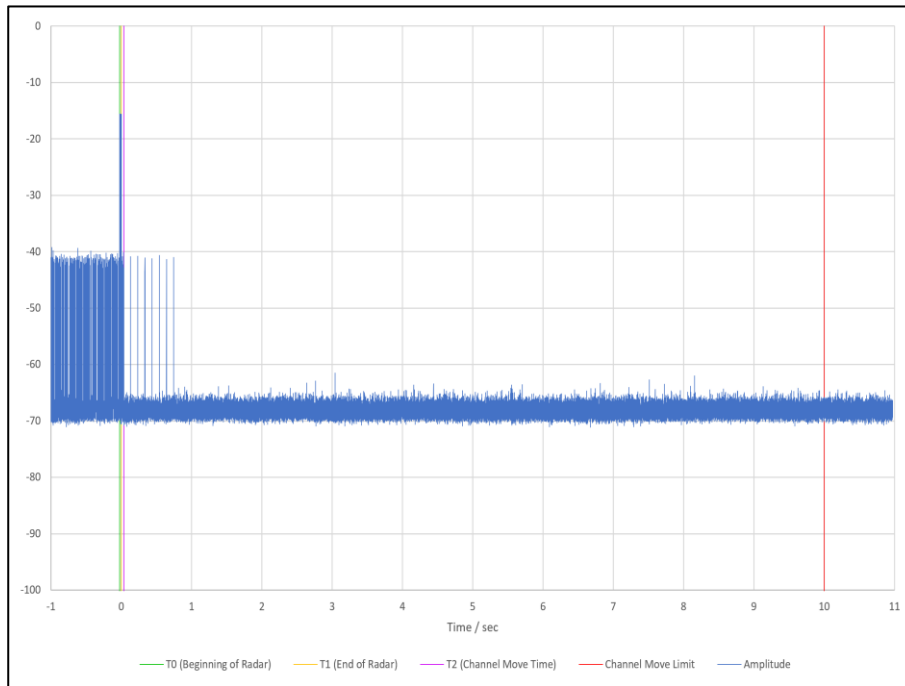


Figure 715 - First 12 s of Channel Shutdown Period

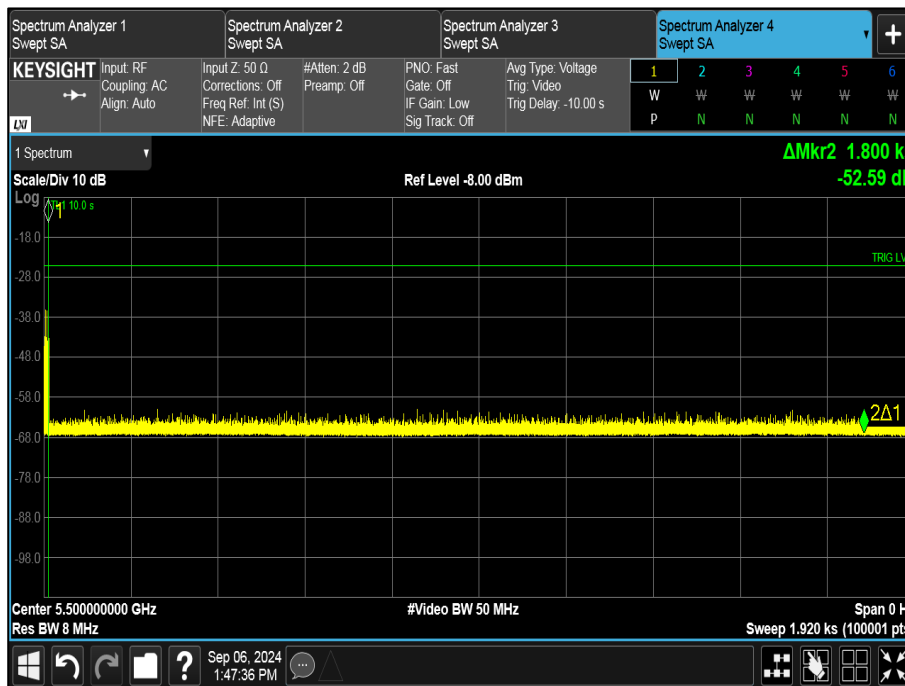


Figure 716 - 30 minute Non-Occupancy Period

5 GHz WLAN - Client to Client

The equipment under test was a Client without Radar Detection.

This test was performed in the following mode of operation: 802.11ax HE160.

The equipment was set up as shown in the diagram below. The EUT and a 2nd client device were both connected to the DFS Master device. The 2nd client device was set to stream video directly to the EUT using the AirPlay protocol, while under the supervision of the DFS master (but without the DFS master re-transmitting the data packets). The channel loading was checked to ensure it was >17%.


To calibrate the level of the radar at the input to the DFS Master, the DFS Master device was replaced by the spectrum analyser and the output of the vector signal generator adjusted to give -62 dBm.

Radar Type	Pulse Width (µs)	PRI (µs)	Number of Pulses
0	1	1428	18

**Table 752 - Radar Pulse Type 0 Characteristics**

Manufacturer	Model	Serial Number	FCC ID
ASUS	GT-AXE11000	N5IGOX400280MY7	MSQ-RTAXJF00

**Table 753 - Details of Master Device used to support testing**

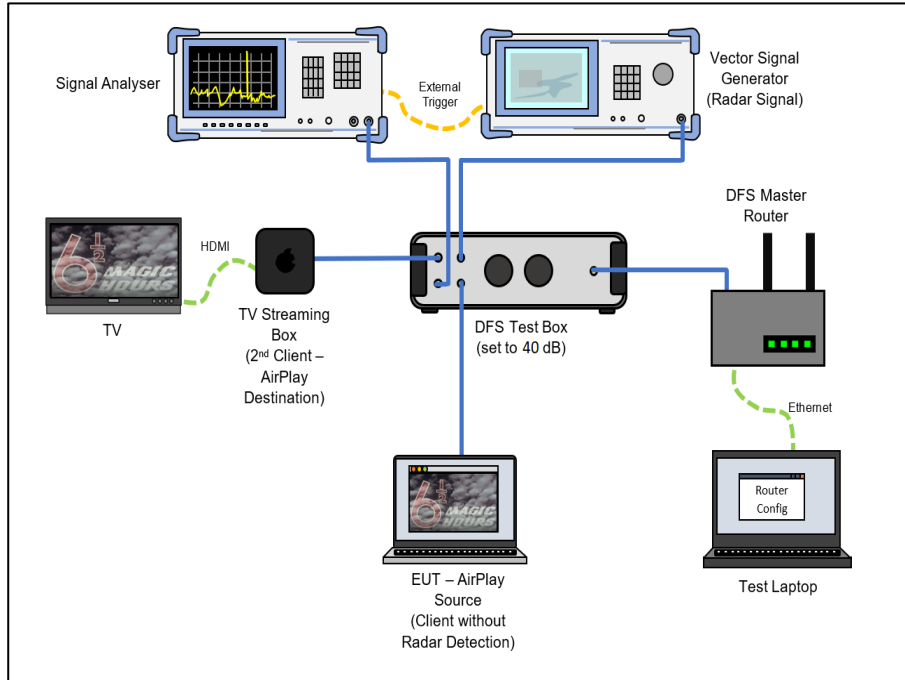

**Figure 717 - Test Equipment Setup Diagram for Client without Radar Detection with Injection at the Master**

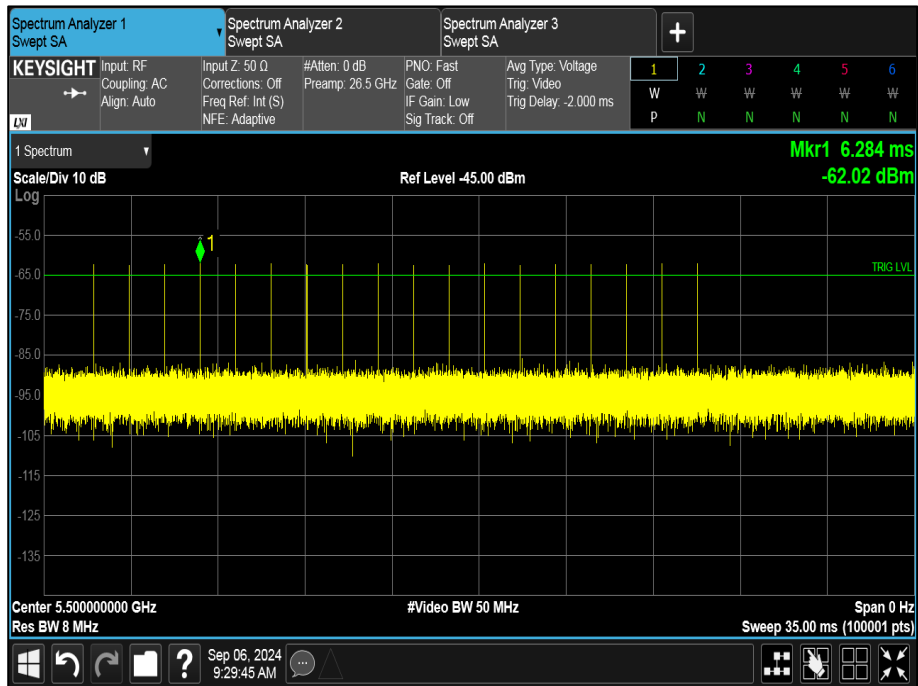


Figure 718 - Verification of Radar Type 0

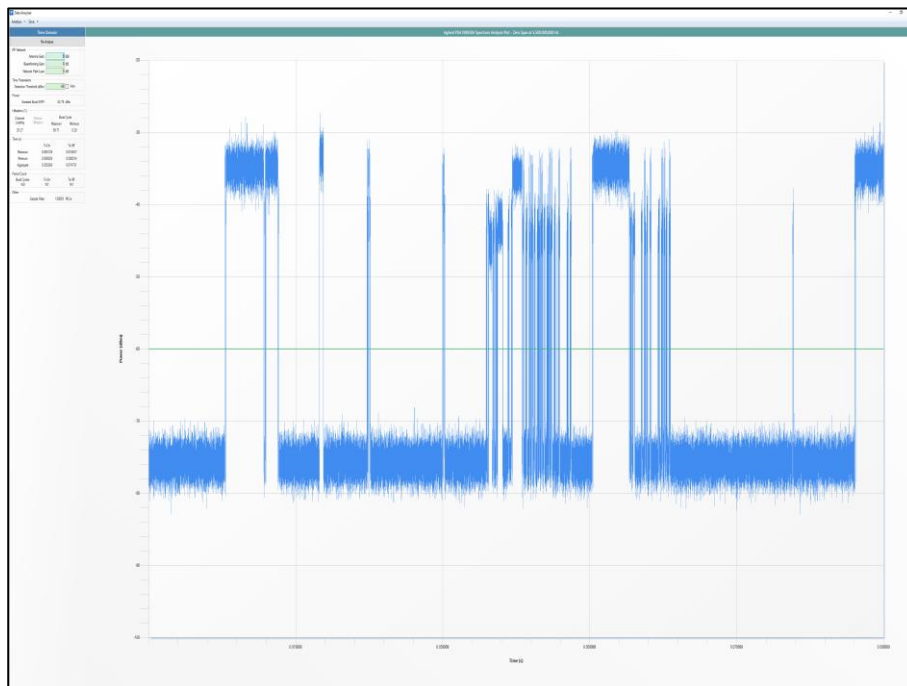


Figure 719 - Channel Loading

The channel loading was 25.27%




Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

**Table 754 - DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection**

Test Parameter	Result
Test Channel	CH106 (5530 MHz), Control CH100 (5500 MHz)
Channel Move Time	0.056
Channel Closing Time (Aggregate Time During 200 ms)	3.000
Channel Closing Time (Aggregate Time During 200 ms to 10 s)	0.000
Channel Closing Time (Aggregate Time During 10 s)	3.000
Transmission Observed During Non-Occupancy Period	No

**Table 755 - In-Service Monitoring Test Results**

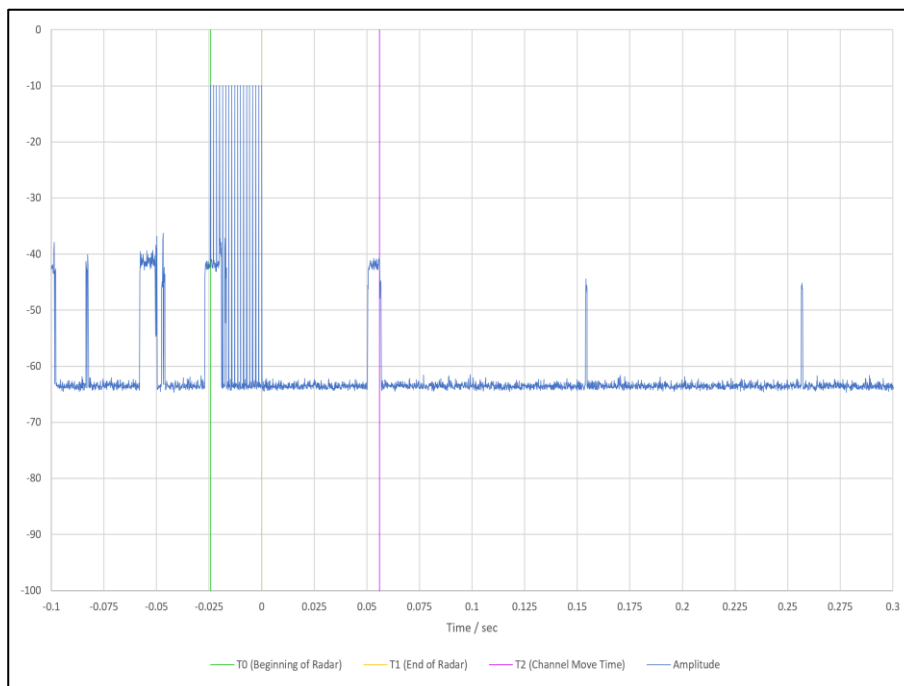

**Figure 720 - First 200 ms of Channel Shutdown Period**

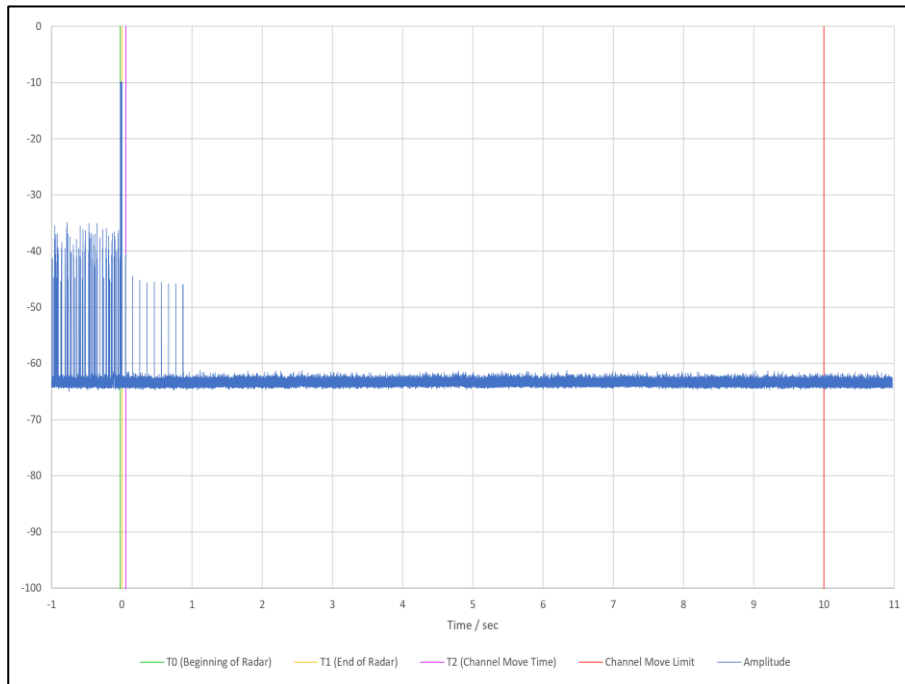


Figure 721 - First 12 s of Channel Shutdown Period

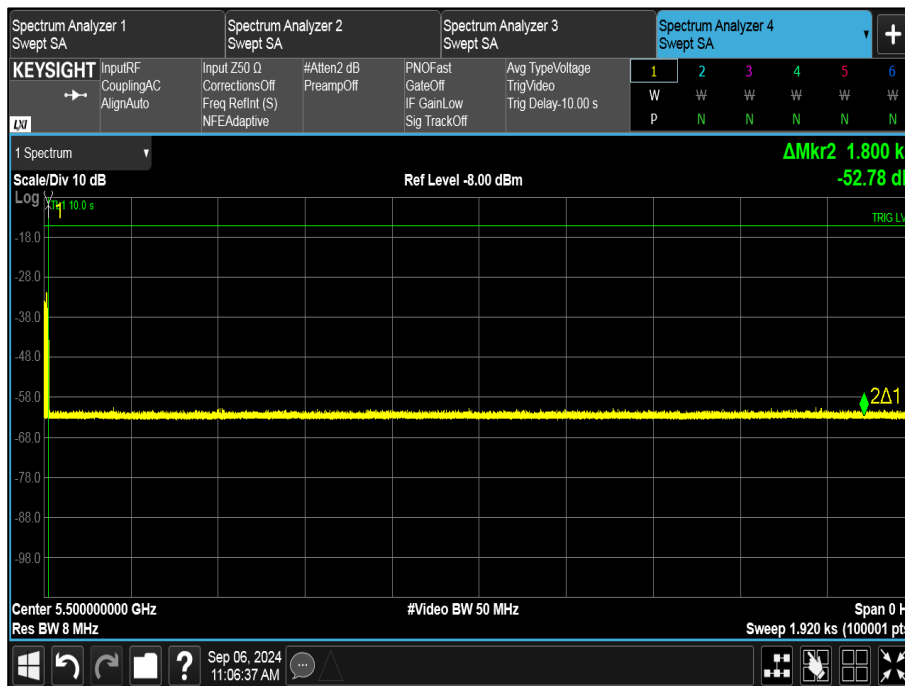


Figure 722 - 30 minute Non-Occupancy Period





FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

**Table 756 - Channel Move Time and Channel Closing Transmission Time Limit**

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

**Table 757 - Non-Occupancy Limit**

**2.7.7 Test Location and Test Equipment Used**

This test was carried out in Shielded Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (18 GHz)	Rosenberger	LU7-071-1000	5103	12	21-Dec-2024
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5416	12	07-Mar-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5426	12	16-May-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5427	12	23-May-2025
Vector Signal Generator	Rohde & Schwarz	SMM100A	5915	36	01-Mar-2026
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	6251	-	TU
Thermohygrometer	R.S Components	1364	6352	12	13-Jun-2025
MXA Signal Analyzer	Keysight Technologies	N9020B	6415	24	22-Mar-2025
Test Coupling Network	TUV SUD	TUV_RxTest_001	6441	12	30-Apr-2025

**Table 758**

TU - Traceability Unscheduled



### 3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	± 6.3 dB
Emission Bandwidth	± 3.91 MHz
Maximum Conducted Output Power	± 1.38 dB
Maximum Conducted Power Spectral Density	± 1.49 dB
Authorised Band Edges	± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Time: ± 0.47 % Power: ± 1.29 dB

**Table 759**

#### Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.