

# FCC Test Report

Apple Inc  
Model: A3186



In accordance with FCC 47 CFR Part 15C  
(2.4 GHz Bluetooth BDR/EDR)

Prepared for: Apple Inc  
One Apple Park Way  
Cupertino  
California  
95014  
USA

FCC ID: BCGA3186

## COMMERCIAL-IN-CONFIDENCE

Document 75961394-102 Issue 01

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steve Marshall	Senior Engineer	Authorised Signatory	16 October 2024

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Rachael Watkins	16 October 2024	

FCC Accreditation  
553713/UK2026 Concorde Park, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2023 for the tests detailed in section 1.3.



### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2024 TÜV SÜD. This report relates only to the actual item/items tested.

### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TUV SUD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuvsud.com/en](http://www.tuvsud.com/en)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Product Information .....	4
1.5	Deviations from the Standard.....	5
1.6	Identification of the EUT .....	5
1.7	EUT Modification Record .....	6
1.8	Test Location .....	7
<b>2</b>	<b>Test Details .....</b>	<b>8</b>
2.1	Restricted Band Edges.....	8
2.2	Frequency Hopping Systems - Average Time of Occupancy .....	30
2.3	Frequency Hopping Systems - Channel Separation.....	45
2.4	Frequency Hopping Systems - Number of Hopping Channels .....	60
2.5	Frequency Hopping Systems - 99% & 20 dB Bandwidth.....	75
2.6	Maximum Conducted Output Power .....	144
2.7	Authorised Band Edges .....	159
2.8	Spurious Radiated Emissions .....	181
<b>3</b>	<b>Measurement Uncertainty .....</b>	<b>198</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	16-October-2024

**Table 1**

## 1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2023
Start of Test	17-July-2024
Finish of Test	17-September-2024
Name of Engineer(s)	Akhil Rajendran Bhaskaran Nair, Colin Brain, Vineeth Nagaraj, David Hill, Jayvir Makwana, Elliot Callender, Ian Hart and Ioan-Alexandru Bogatu
Related Document(s)	ANSI C63.4 (2014) ANSI C63.10 (2020) KDB 662911 D01 v02r01



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: 2.4 GHz Bluetooth BDR/EDR				
-	15.203	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	Restricted Band Edges	Pass	ANSI C63.10 (2020)
2.2	15.247 (a)(1)	Frequency Hopping Systems - Average Time of Occupancy	Pass	ANSI C63.10 (2020)
2.3	15.247 (a)(1)	Frequency Hopping Systems - Channel Separation	Pass	ANSI C63.10 (2020)
2.4	15.247 (a)(1)	Frequency Hopping Systems - Number of Hopping Channels	Pass	ANSI C63.10 (2020)
2.5	15.247 (a)(1)	Frequency Hopping Systems - 99% & 20 dB Bandwidth	Pass	ANSI C63.10 (2020)
2.6	15.247 (b)	Maximum Conducted Output Power	Pass	ANSI C63.10 (2020) KDB 662911 D01 v02r01
2.7	15.247 (d)	Authorised Band Edges	Pass	ANSI C63.10 (2020)
2.8	15.209 and 15.247 (d)	Spurious Radiated Emissions	Pass	ANSI C63.10 (2020) ANSI C63.4 (2014)

**Table 2**



## 1.4 Product Information

### 1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

### 1.4.2 Test Modes

The EUT's 2.4 GHz Bluetooth radio supports SISO (Single Input/Single Output) operation on three different cores (Core 0, 1, and 2). It also supports MIMO (Multiple Input/Multiple Output) beamforming operation on Cores 0+1. The EUT supports Basic Rate and Enhanced Data Rate modes for FHSS operation.

Core 0 and core 1 also operate at two power settings: low power "iPA" and high power "ePA", with dedicated core 2 only supporting the lower power mode. The EUT uses different output powers per core dependent on how many cores are used.

After preliminary investigations, conducted tests on the EUT and Radiated Band Edge were performed in the following modes:

SISO modes:

- DH5 - iPA - Core 1
- 2-DH5 - iPA - Core 1
- 3-DH5 - iPA - Core 1
- DH5 - iPA - Core 2
- 2-DH5 - iPA - Core 2
- 3-DH5 - iPA - Core 2
- 2-DH5 - ePA - Core 1
- 3-DH5 - ePA - Core 1

MIMO modes:

- DH5 - iPA - Core 0 + Core 1
- 2-DH5 - iPA - Core 0 + Core 1
- 3-DH5 - iPA - Core 0 + Core 1
- 2-DH5 - ePA - Core 0 + Core 1
- 3-DH5 - ePA - Core 0 + Core 1

Spurious Radiated Emissions tests were limited to the modes shown below, with the device configured to operate at maximum output power. As this was deemed to be worst case.

SISO mode:

- DH5 - iPA - Core 2

MIMO modes:

- 2-DH5 – ePA – Core 0 + Core 1
- DH5 - iPA - Core 0 + Core 1



**1.4.3 Test Setup**

For conducted tests the EUT antennas were disconnected and replaced with U. FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all tests the EUT was put into a continuous transmit/receive test mode with the chipset manufacturer’s test commands. These ran the specified modulation types on either a fixed single channel or in Hopping mode, to ensure the measured signals were representative.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

**1.4.4 Antenna Gain Table**

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	2400 to 2480	3.3	0.71
Core 1	2400 to 2480	6.3	0.71
Dedicated Core 2	2400 to 2480	5.2	0.71

**Table 3**

**1.5 Deviations from the Standard**

No deviations from the applicable test standard were made during testing.

**1.6 Identification of the EUT**

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3186			
Serial Number	Hardware Version	Software Version	Firmware
GQFXQXKN7J	REV1.0	24A32191n	22.1.65.459
GX4WD79J45	REV1.0	24A32191n	22.1.65.459
FXGL43TXWC	REV1.0	24A32191n	22.1.65.459
M44MHNWLH2	REV1.0	24A32190v	22.1.65.459
LXXD3YHT0L	REV1.0	24A32191n	22.1.65.459

**Table 4**



**1.7 EUT Modification Record**

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3186, Serial Number: GQFXQXKN7J			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3186, Serial Number: FXGL43TXWC			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3186, Serial Number: GX4WD79J45			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3186, Serial Number: M44MHNWLH2			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3186, Serial Number: LXXD3YHT0L			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 5**



## 1.8 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth BDR/EDR		
Restricted Band Edges	Akhil Rajendran Bhaskaran Nair, Colin Brain and Vineeth Nagaraj	UKAS
Frequency Hopping Systems - Average Time of Occupancy	David Hill and Jayvir Makwana	UKAS
Frequency Hopping Systems - Channel Separation	David Hill and Jayvir Makwana	UKAS
Frequency Hopping Systems - Number of Hopping Channels	David Hill and Jayvir Makwana	UKAS
Frequency Hopping Systems - 99% & 20 dB Bandwidth	David Hill and Jayvir Makwana	UKAS
Maximum Conducted Output Power	Jayvir Makwana	UKAS
Authorised Band Edges	Akhil Rajendran Bhaskaran Nair, Colin Brain and Vineeth Nagaraj	UKAS
Spurious Radiated Emissions	Elliot Callender, Ian Hart and Ioan-Alexandru Bogatu	UKAS

**Table 6**

Office Address:

TÜV SÜD  
Concorde Park  
Concorde Way  
Fareham  
Hampshire  
PO15 5FG  
United Kingdom





## 2 Test Details

### 2.1 Restricted Band Edges

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205

#### 2.1.2 Equipment Under Test and Modification State

A3186, S/N: GX4WD79J45 - Modification State 0  
A3186, S/N: FXGL43TXWC - Modification State 0

#### 2.1.3 Date of Test

29-July-2024 to 31-July-2024

#### 2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.5.2.6.

These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10, clause 4.1.4.2.2 to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dB $\mu$ V/m to  $\mu$ V/m:

$10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

#### 2.1.5 Environmental Conditions

Ambient Temperature	22.5 - 24.6 °C
Relative Humidity	42.4 - 56.4 %




**2.1.6 Test Results**

2.4 GHz Bluetooth BDR/EDR


iPA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
Static	DH5	2402	2390	55.63	40.82
Static	2-DH5	2402	2390	55.31	40.85
Static	3-DH5	2402	2390	55.26	40.84
Static	DH5	2480	2483.5	54.41	41.99
Static	2-DH5	2480	2483.5	54.31	42.19
Static	3-DH5	2480	2483.5	54.76	42.18


**Table 7 - SISO Restricted Band Edge Results**

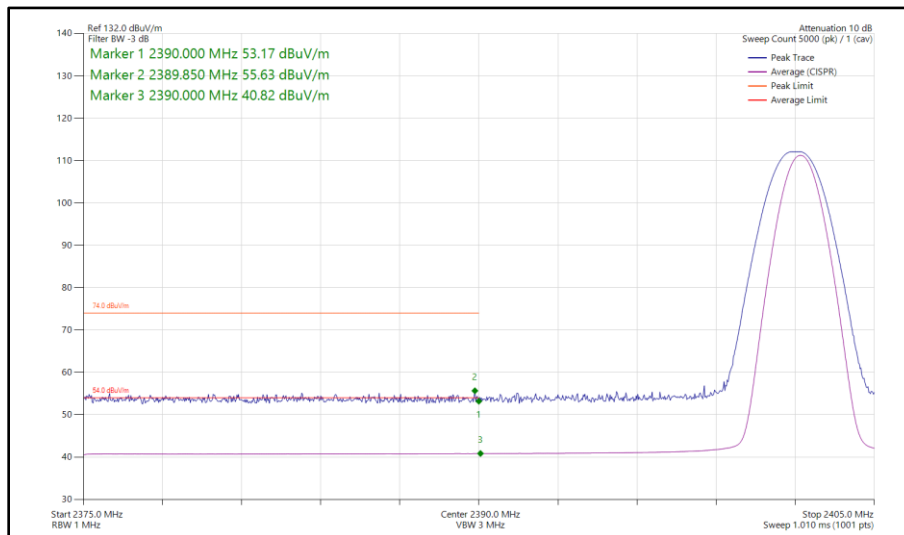

**Figure 1 - Bluetooth DH5, SISO, Core 0 - 2402 MHz  
 Band Edge Frequency 2390 MHz**

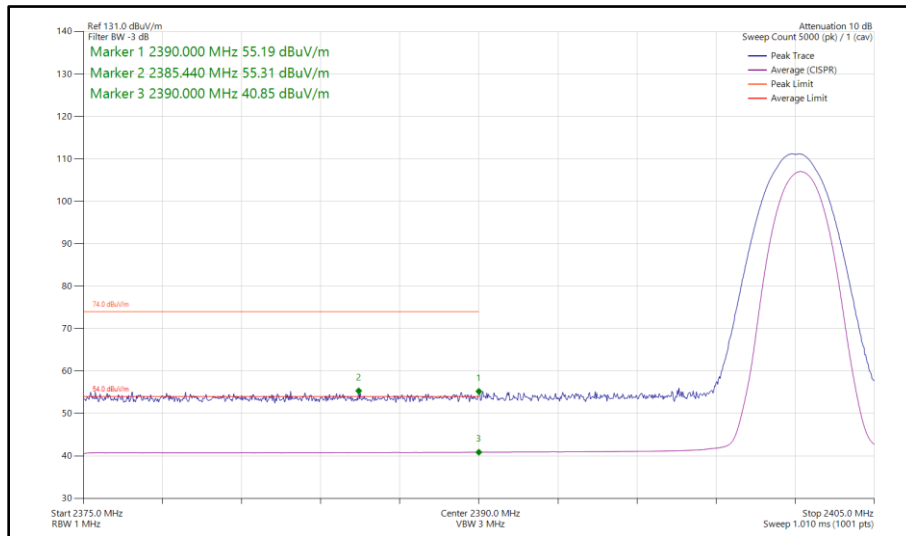

**Figure 2 - Bluetooth 2-DH5, SISO, Core 0 - 2402 MHz  
Band Edge Frequency 2390 MHz**

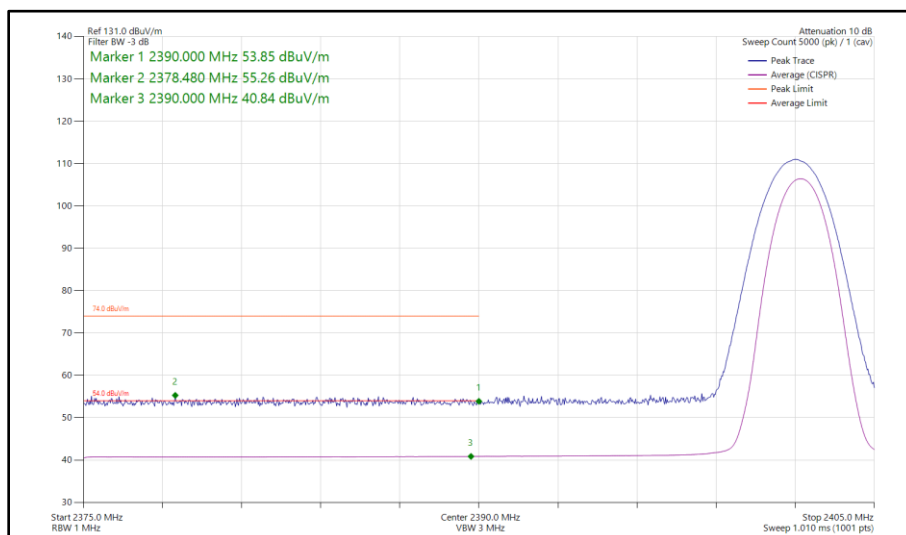

**Figure 3 - Bluetooth 3-DH5, SISO, Core 0 - 2402 MHz  
Band Edge Frequency 2390 MHz**

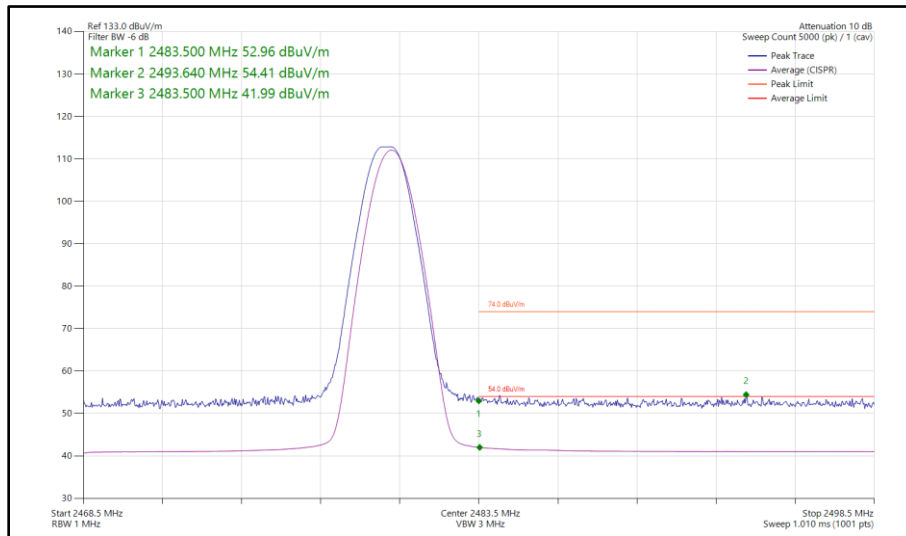


Figure 4 - Bluetooth DH5, SISO, Core 0 - 2480 MHz  
Band Edge Frequency 2483.5 MHz


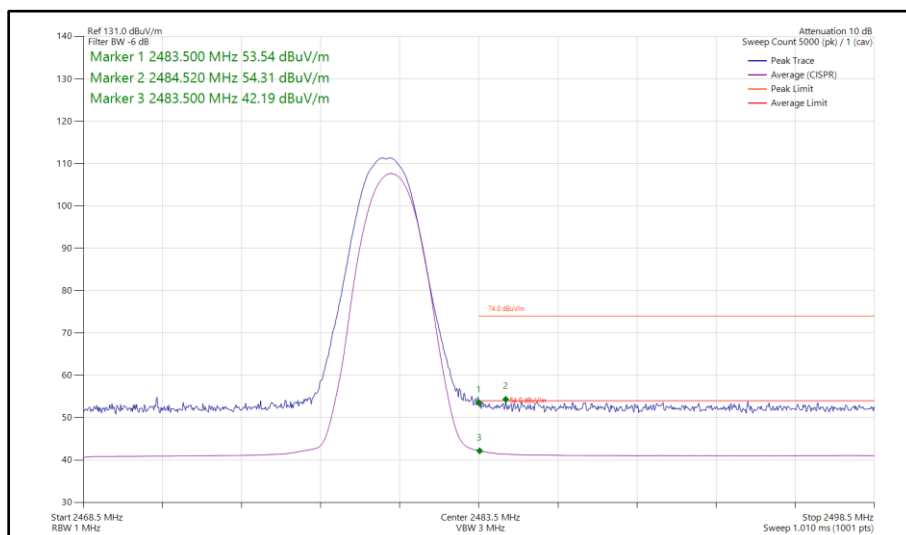


Figure 5 - Bluetooth 2-DH5, SISO, Core 0 - 2480 MHz  
Band Edge Frequency 2483.5 MHz




**Figure 6 - Bluetooth 3-DH5, SISO, Core 0 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**

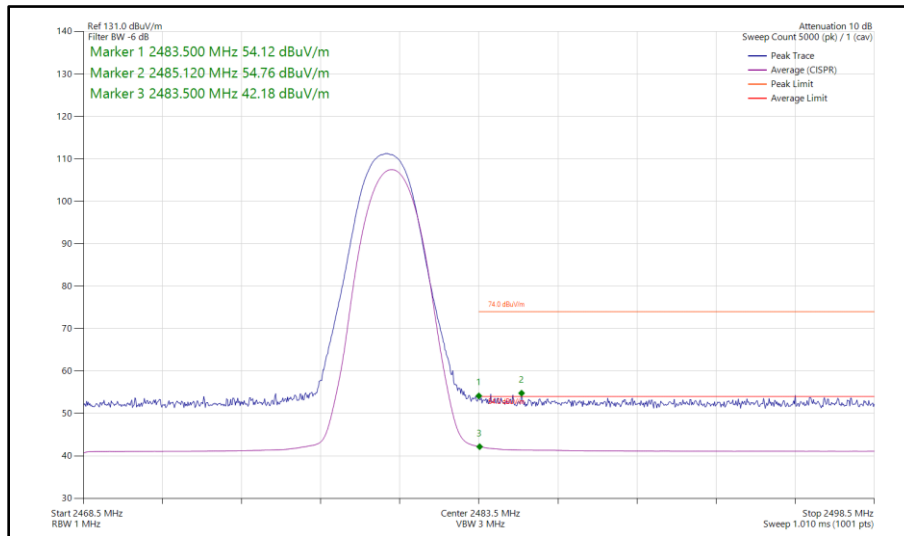


iPA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dB $\mu$ V/m)	Average Level (dB $\mu$ V/m)
Static	DH5	2402	2390	55.68	40.59
Static	2-DH5	2402	2390	55.00	40.63
Static	3-DH5	2402	2390	55.95	40.63
Static	DH5	2480	2483.5	54.24	41.92
Static	2-DH5	2480	2483.5	54.87	42.28
Static	3-DH5	2480	2483.5	53.99	42.43

**Table 8 - SISO Restricted Band Edge Results**

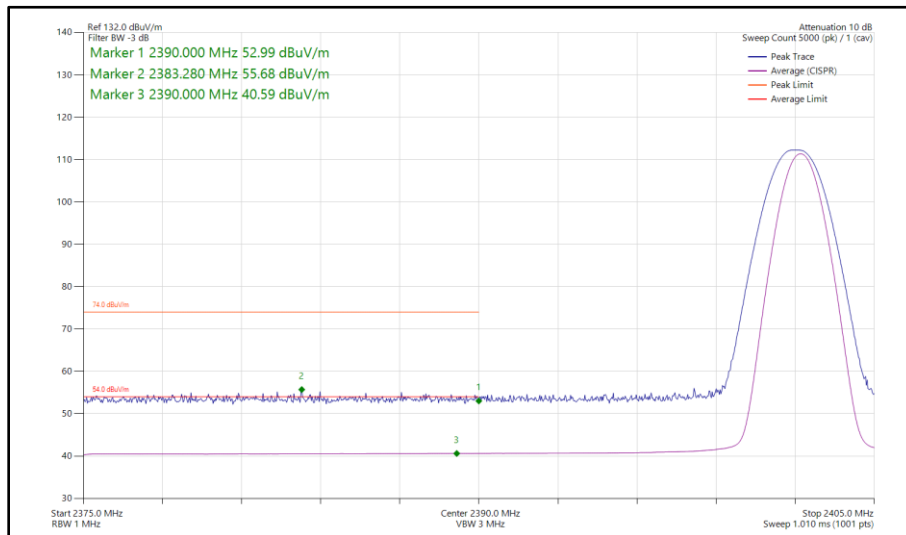

**Figure 7 - Bluetooth DH5, SISO, Core 1 - 2402 MHz  
 Band Edge Frequency 2390 MHz**

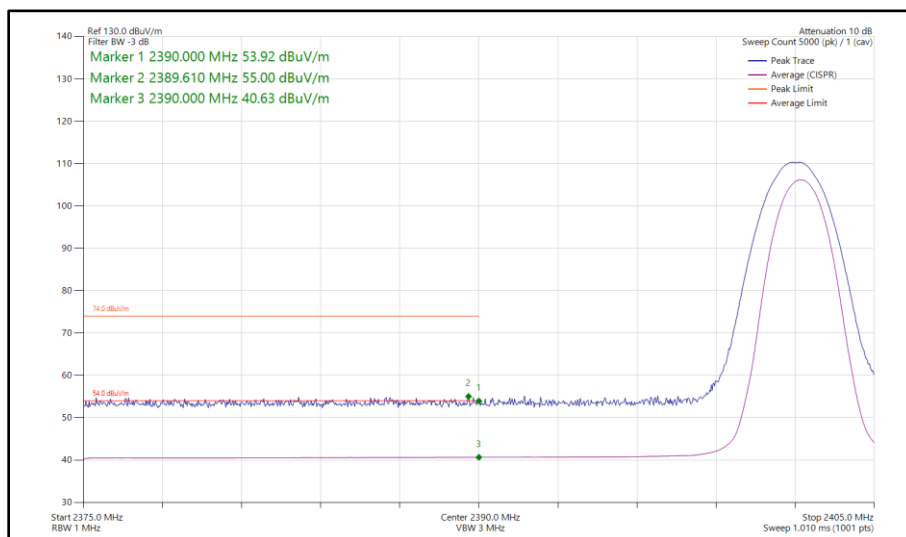

**Figure 8 - Bluetooth 2-DH5, SISO, Core 1 - 2402 MHz  
 Band Edge Frequency 2390 MHz**

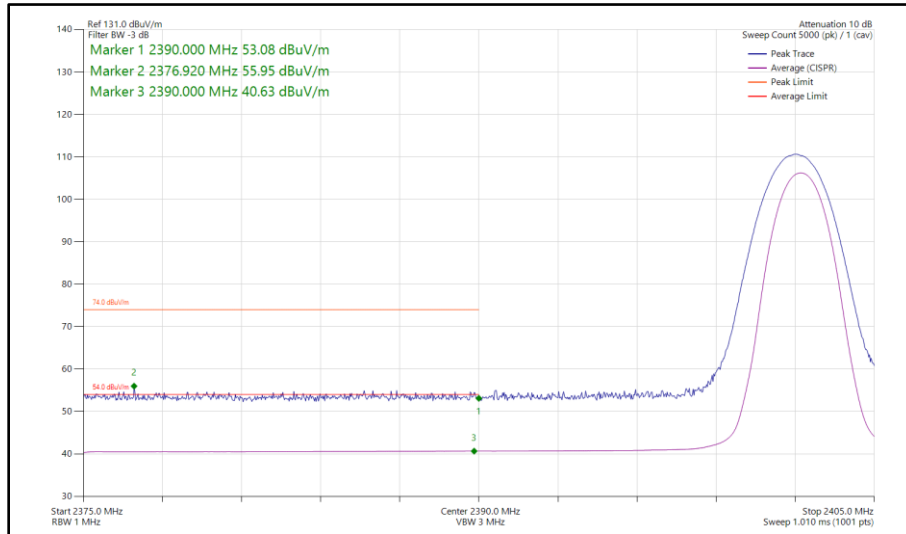


Figure 9 - Bluetooth 3-DH5, SISO, Core 1 - 2402 MHz  
Band Edge Frequency 2390 MHz



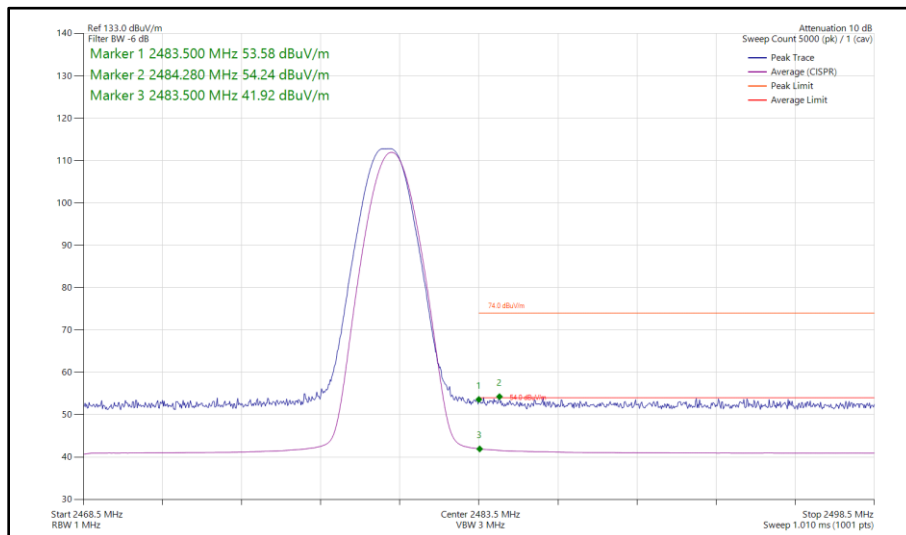


Figure 10 - Bluetooth DH5, SISO, Core 1 - 2480 MHz  
Band Edge Frequency 2483.5 MHz

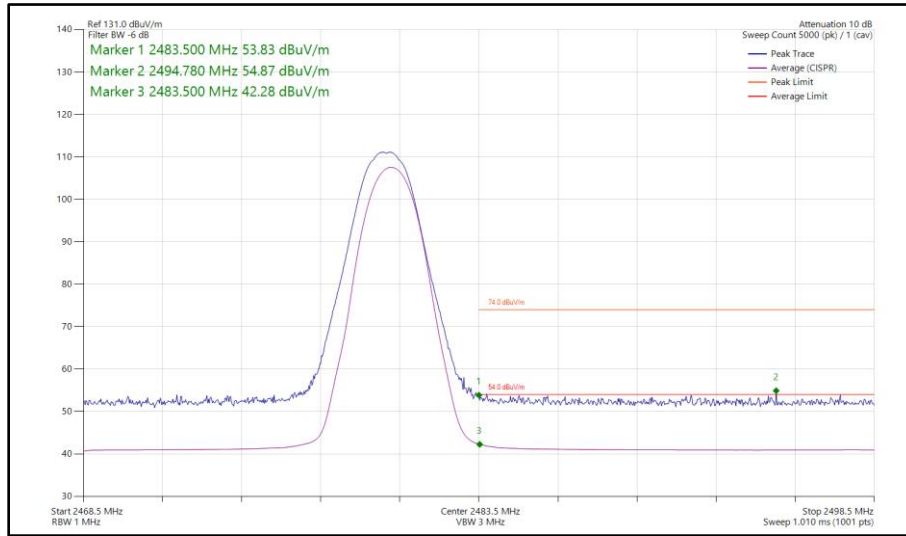

**Figure 11 - Bluetooth 2-DH5, SISO, Core 1 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**

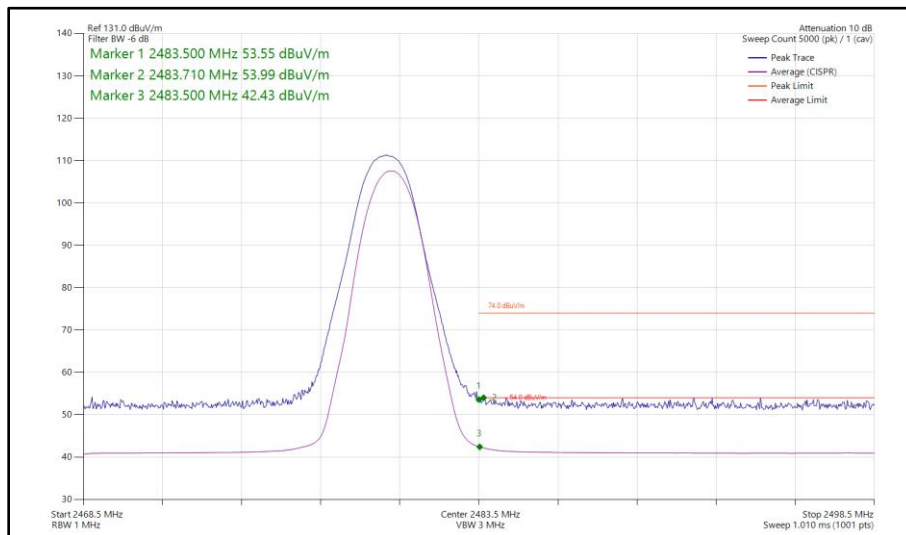

**Figure 12 - Bluetooth 3-DH5, SISO, Core 1 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**







iPA - Core 2 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dB $\mu$ V/m)	Average Level (dB $\mu$ V/m)
Static	DH5	2402	2390	55.51	40.71
Static	2-DH5	2402	2390	55.12	40.74
Static	3-DH5	2402	2390	55.46	40.74
Static	DH5	2480	2483.5	53.93	42.04
Static	2-DH5	2480	2483.5	54.19	42.23
Static	3-DH5	2480	2483.5	54.87	42.18


**Table 9 - SISO Restricted Band Edge Results**

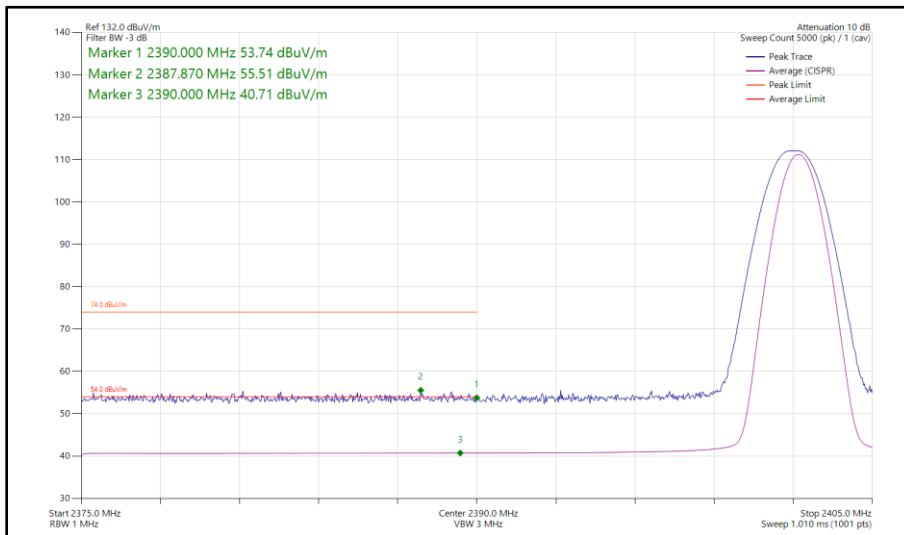


**Figure 13 - Bluetooth DH5, SISO, Core 2 - 2402 MHz  
 Band Edge Frequency 2390 MHz**

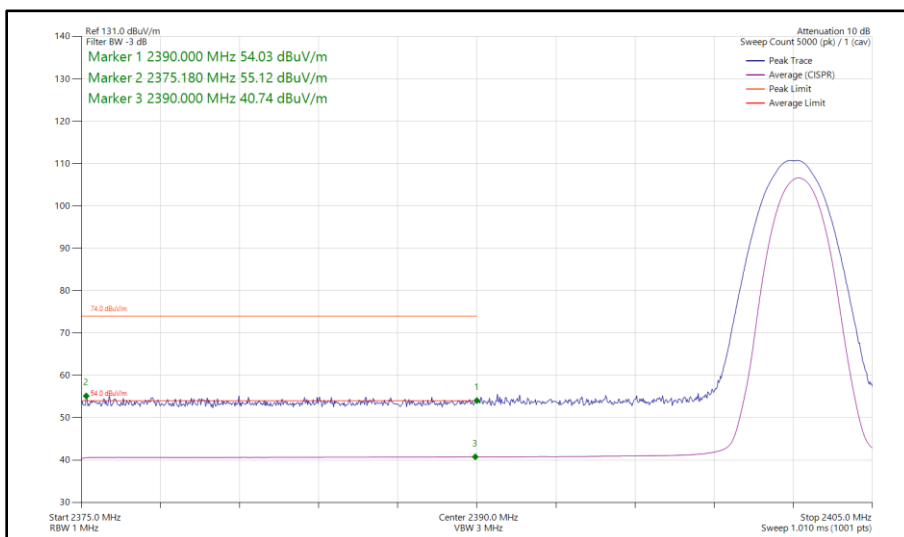


**Figure 14 - Bluetooth 2-DH5, SISO, Core 2 - 2402 MHz  
 Band Edge Frequency 2390 MHz**

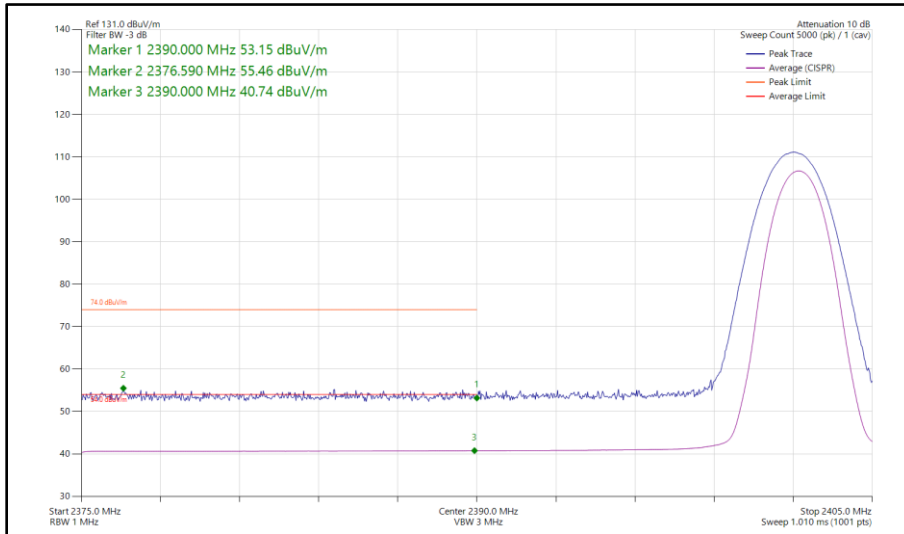


**Figure 15 - Bluetooth 3-DH5, SISO, Core 2 - 2402 MHz  
Band Edge Frequency 2390 MHz**

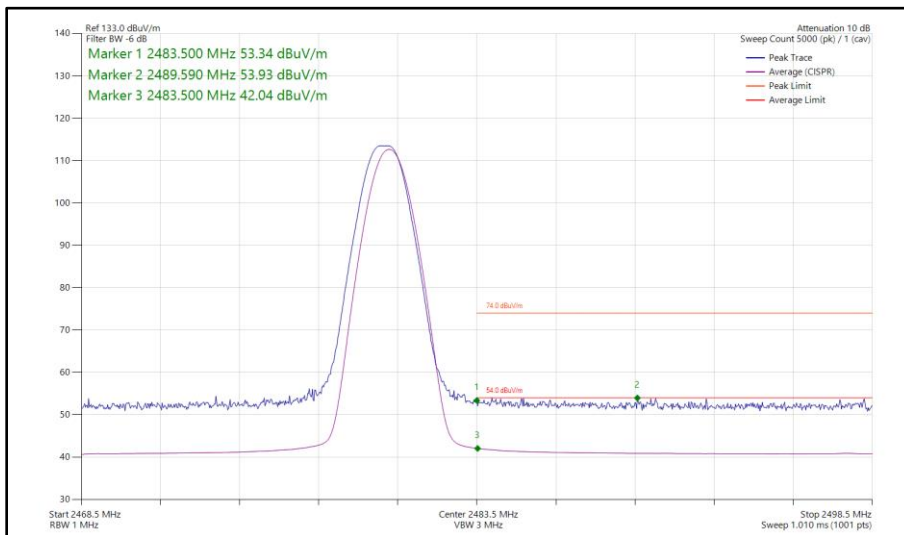

**Figure 16 - Bluetooth DH5, SISO, Core 2 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**

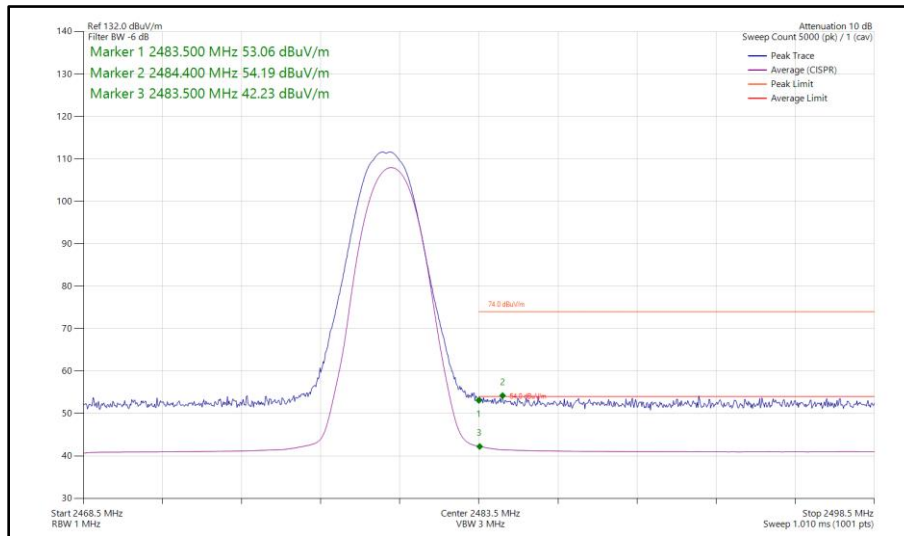

**Figure 17 - Bluetooth 2-DH5, SISO, Core 2 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**

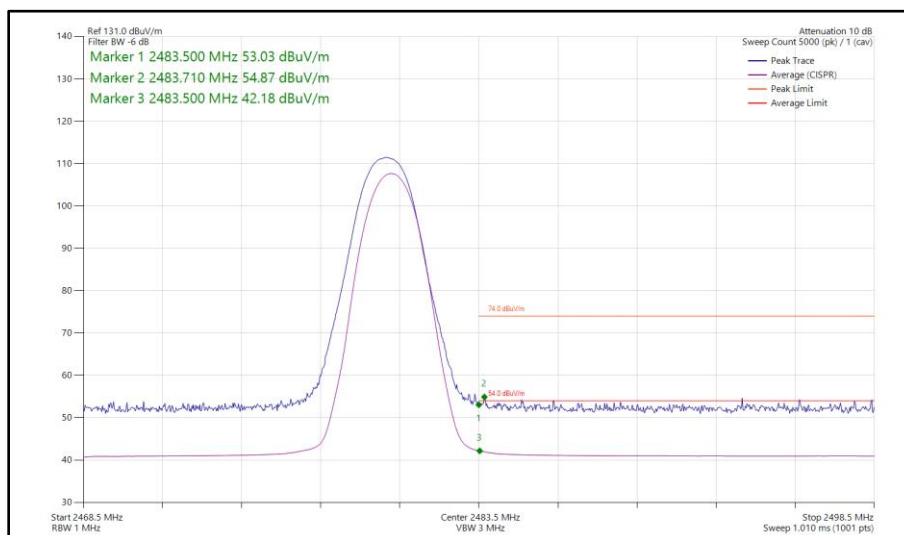

**Figure 18 - Bluetooth 3-DH5, SISO, Core 2 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**



iPA - Core 0 - Core 1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
Static	DH5	2402	2390	55.49	40.89
Static	2-DH5	2402	2390	56.18	40.89
Static	3-DH5	2402	2390	55.26	40.93
Static	DH5	2480	2483.5	55.19	43.51
Static	2-DH5	2480	2483.5	54.70	43.43
Static	3-DH5	2480	2483.5	55.86	43.64

Table 10 - MIMO Restricted Band Edge Results

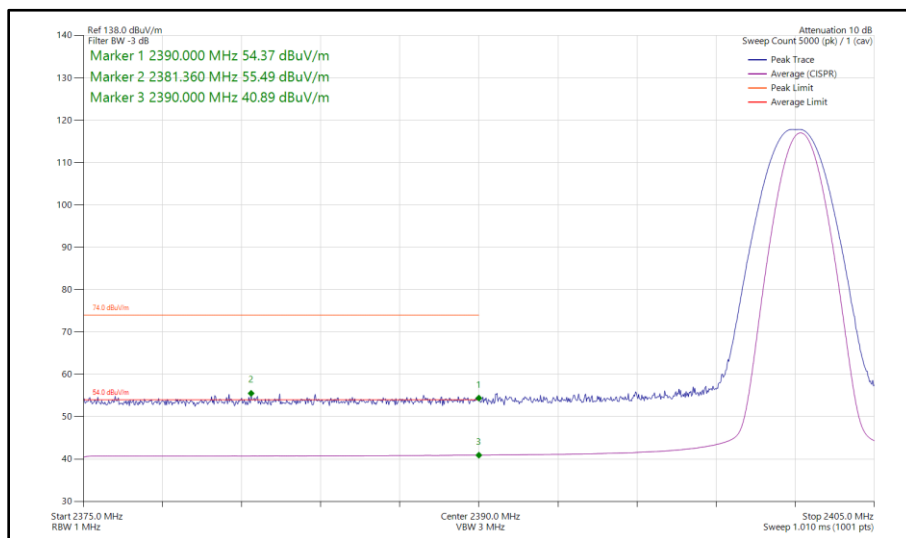


Figure 19 - Bluetooth DH5, MIMO, Core 0 - Core 1 - 2402 MHz  
 Band Edge Frequency 2390 MHz



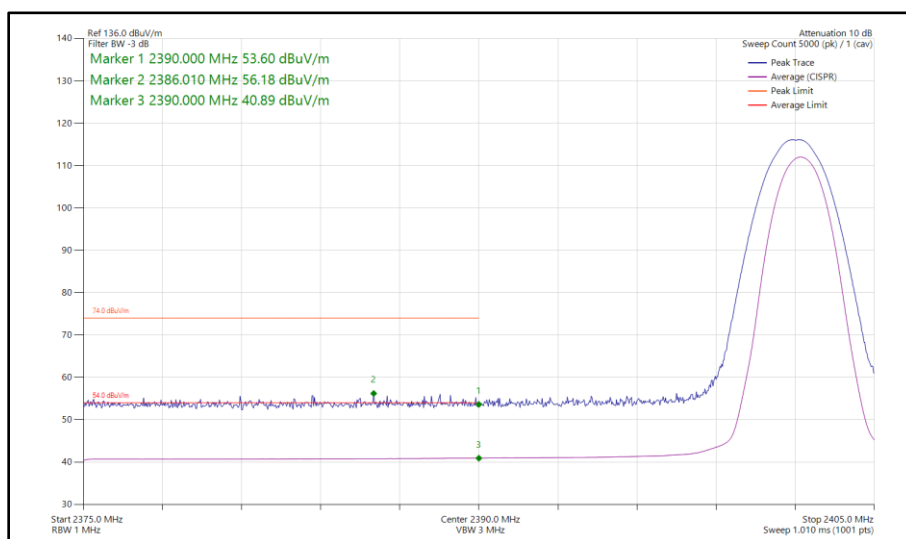



Figure 20 - Bluetooth 2-DH5, MIMO, Core 0 - Core 1 - 2402 MHz  
 Band Edge Frequency 2390 MHz

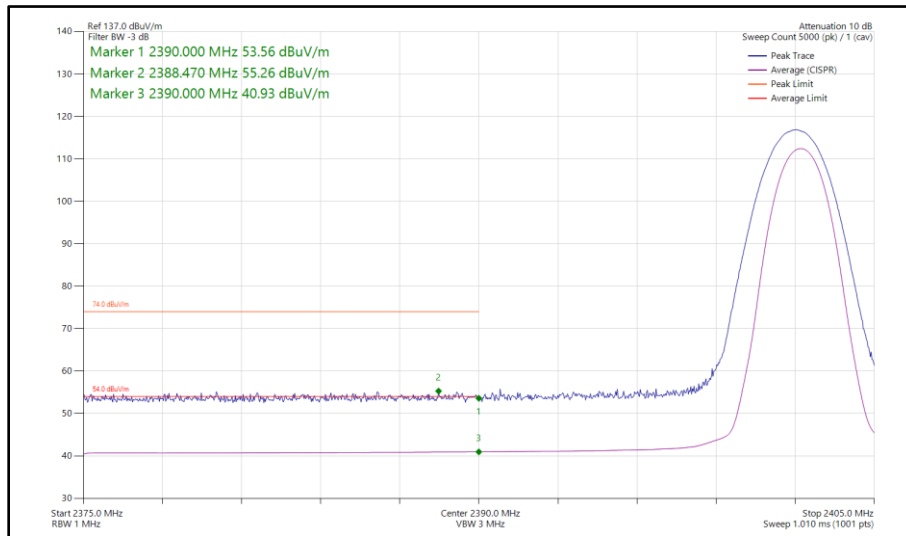


**Figure 21 - Bluetooth 3-DH5, MIMO, Core 0 - Core 1 - 2402 MHz  
Band Edge Frequency 2390 MHz**

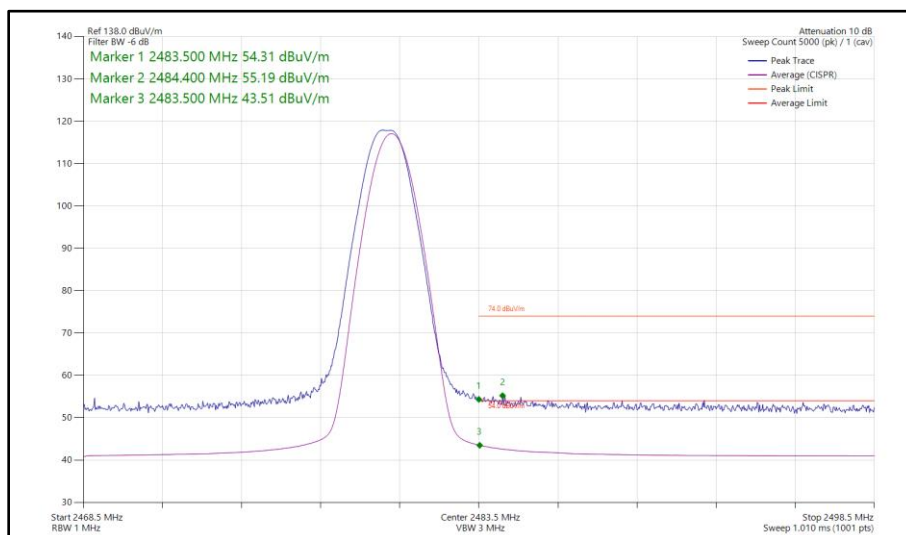

**Figure 22 - Bluetooth DH5, MIMO, Core 0 - Core 1 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**

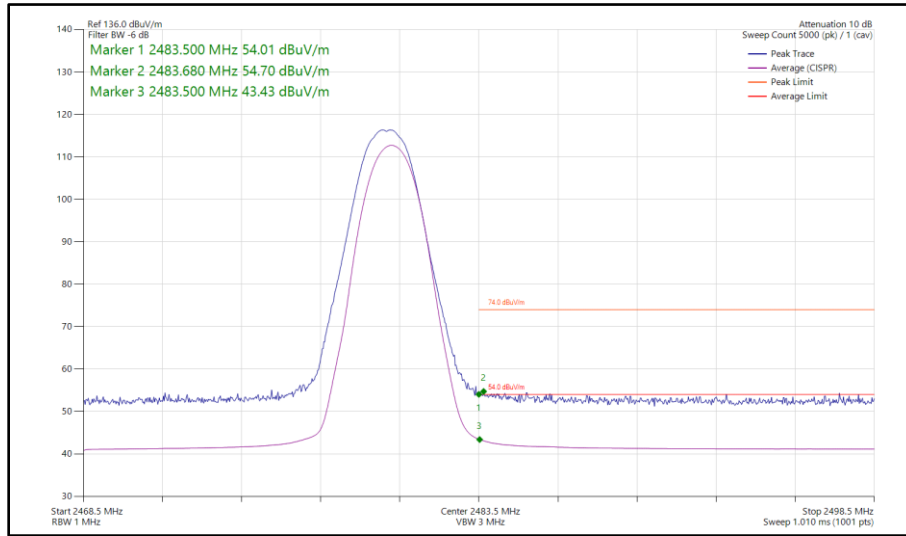

**Figure 23 - Bluetooth 2-DH5, MIMO, Core 0 - Core 1 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**

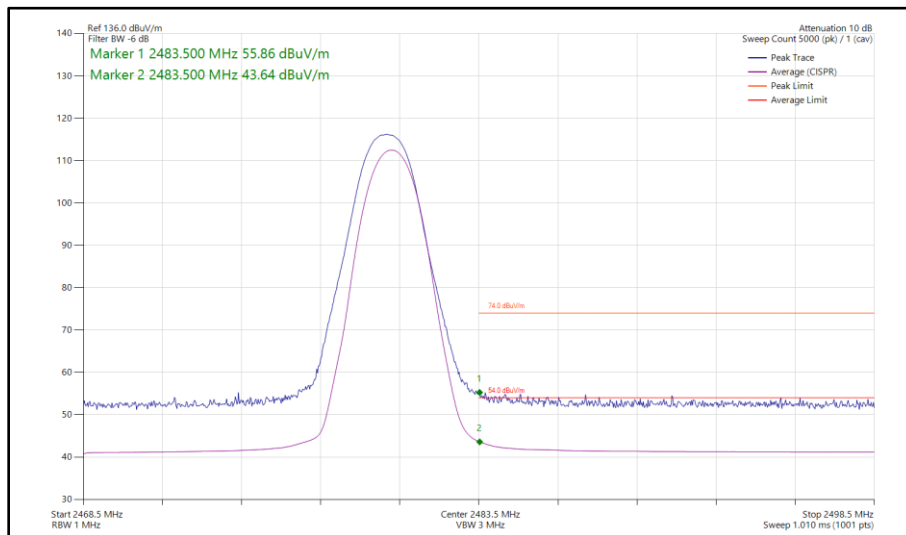

**Figure 24 - Bluetooth 3-DH5, MIMO, Core 0 - Core 1 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**



ePA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
Static	2-DH5	2402	2390	56.87	42.74
Static	3-DH5	2402	2390	57.51	42.91
Static	2-DH5	2480	2483.5	62.14	50.17
Static	3-DH5	2480	2483.5	64.03	51.17

Table 11 - SISO Restricted Band Edge Results

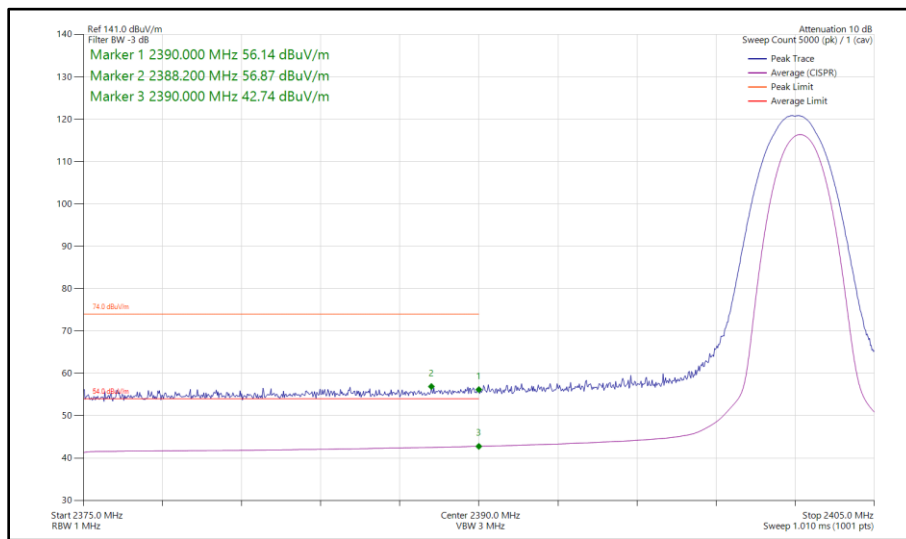


Figure 25 - Bluetooth 2-DH5, SISO, Core 0 - 2402 MHz  
 Band Edge Frequency 2390 MHz



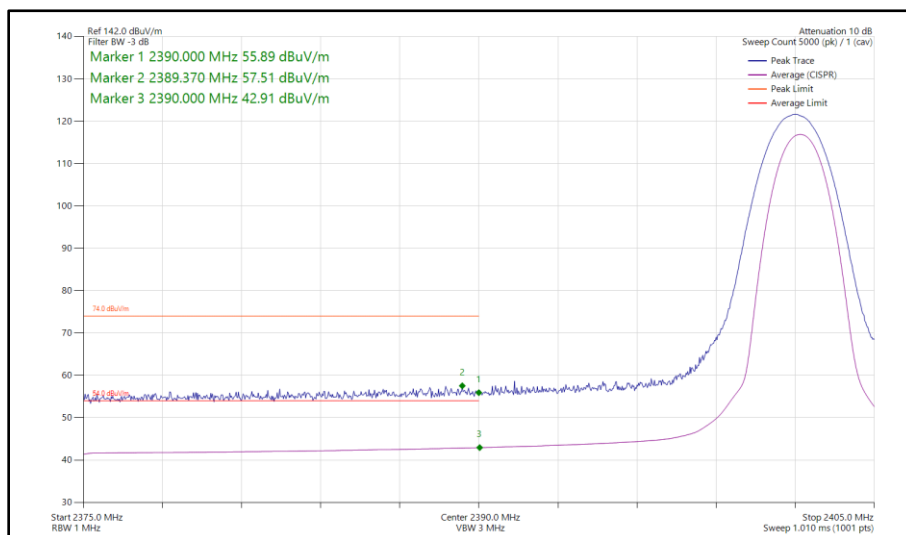


Figure 26 - Bluetooth 3-DH5, SISO, Core 0 - 2402 MHz  
 Band Edge Frequency 2390 MHz

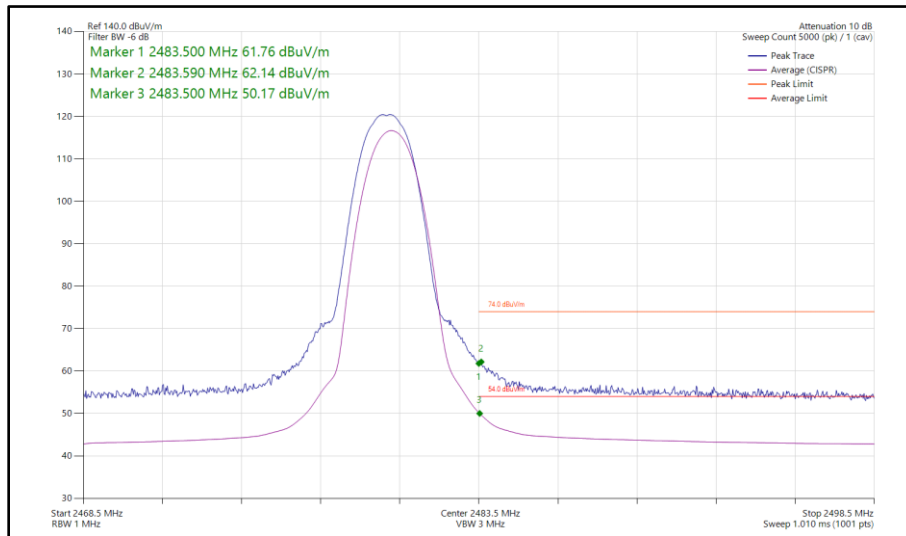

**Figure 27 - Bluetooth 2-DH5, SISO, Core 0 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**

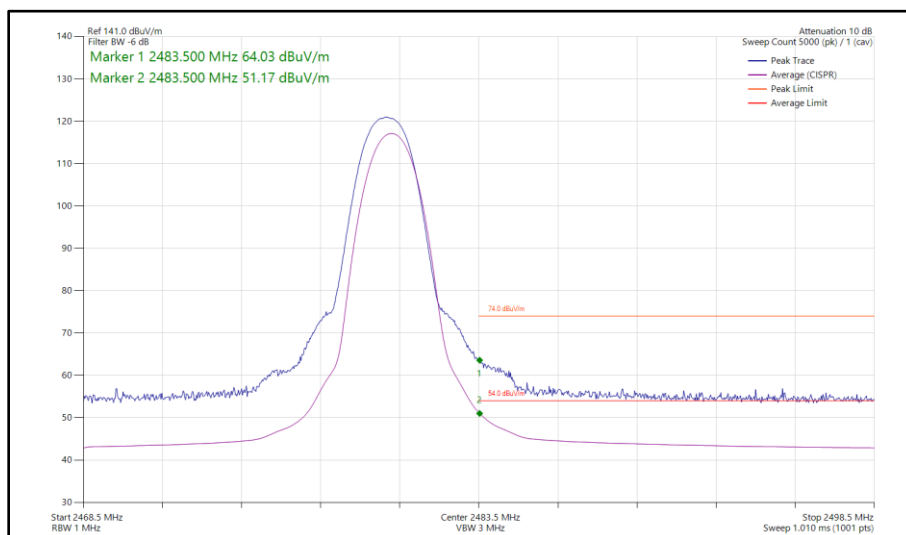

**Figure 28 - Bluetooth 3-DH5, SISO, Core 0 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**





ePA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
Static	2-DH5	2402	2390	57.99	43.18
Static	3-DH5	2402	2390	57.52	42.85
Static	2-DH5	2480	2483.5	62.77	50.21
Static	3-DH5	2480	2483.5	64.03	50.87

Table 12 - SISO Restricted Band Edge Results

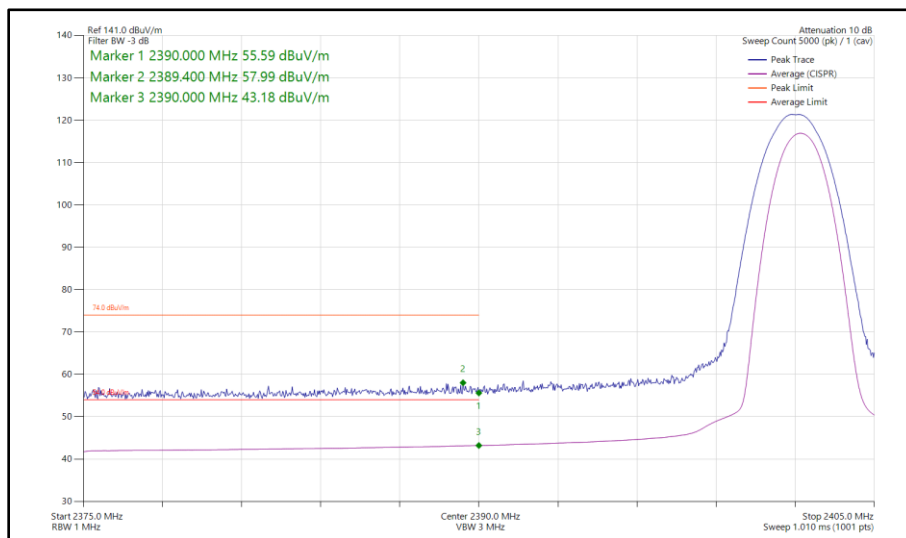


Figure 29 - Bluetooth 2-DH5, SISO, Core 1 - 2402 MHz  
 Band Edge Frequency 2390 MHz



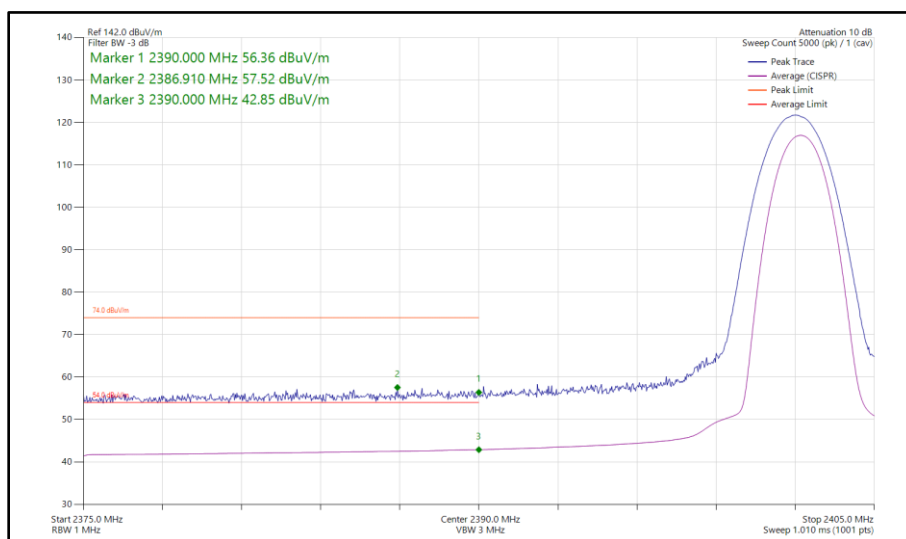


Figure 30 - Bluetooth 3-DH5, SISO, Core 1 - 2402 MHz  
 Band Edge Frequency 2390 MHz

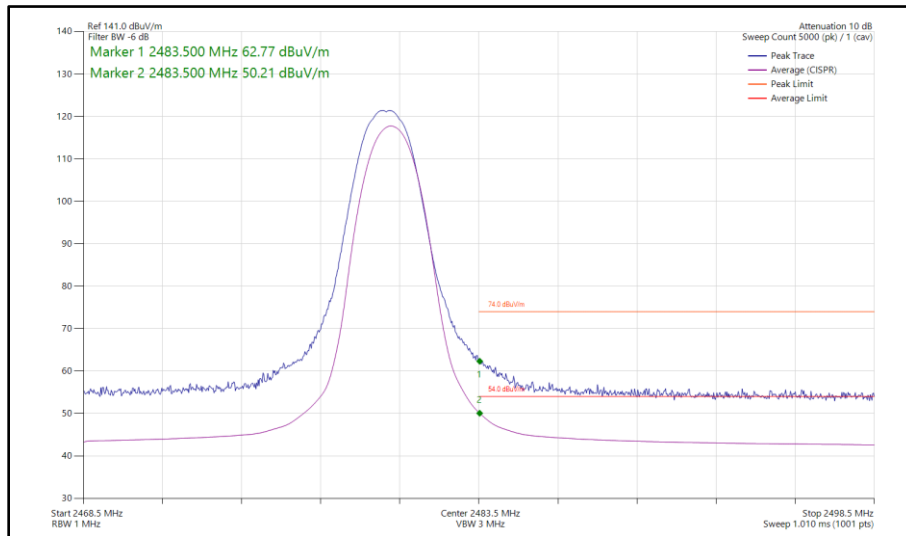

**Figure 31 - Bluetooth 2-DH5, SISO, Core 1 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**

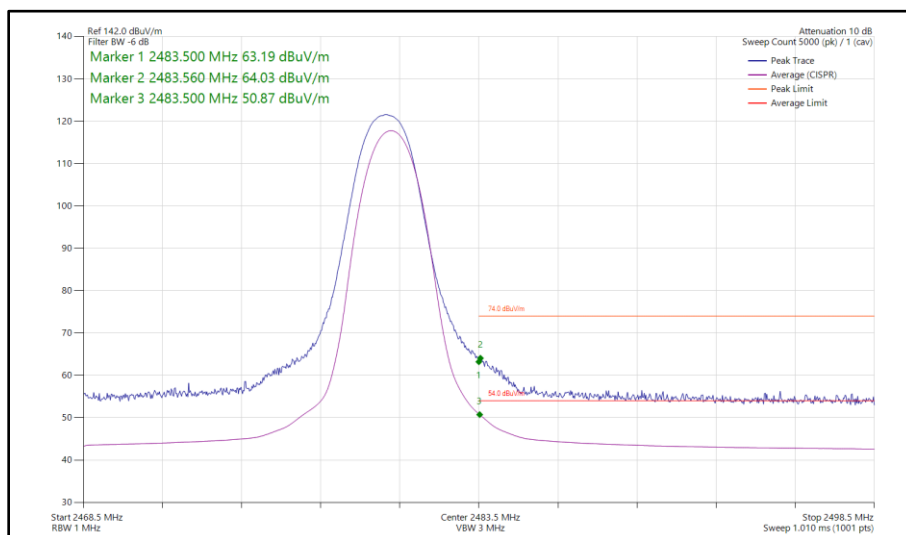

**Figure 32 - Bluetooth 3-DH5, SISO, Core 1 - 2480 MHz  
Band Edge Frequency 2483.5 MHz**




ePA - Core 0 - Core 1 (MIMO)


Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
Static	2-DH5	2402	2390	60.03	44.95
Static	3-DH5	2402	2390	62.03	47.28
Static	2-DH5	2480	2483.5	65.54	*46.54
Static	3-DH5	2480	2483.5	67.66	*48.66

**Table 13 - MIMO Restricted Band Edge Results**


\*Note these results have been corrected using Duty Cycle Correction factor of 19dB from the peak.

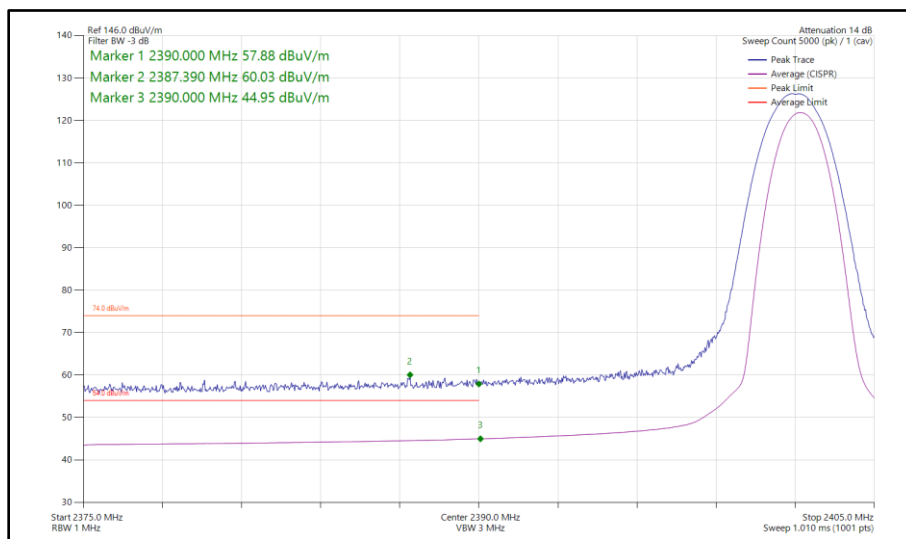


**Figure 33 - Bluetooth 2-DH5, MIMO, Core 0 - Core 1 - 2402 MHz Band Edge Frequency 2390 MHz**

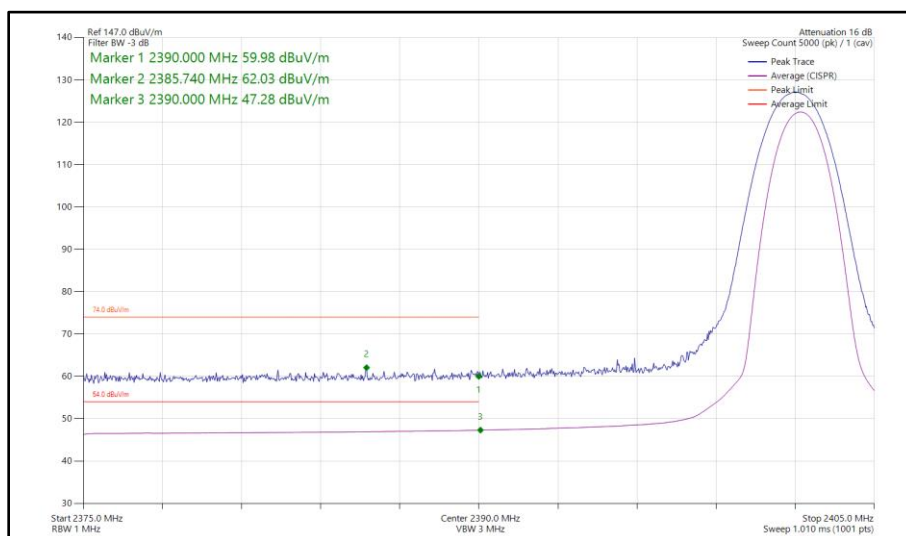

**Figure 34 - Bluetooth 3-DH5, MIMO, Core 0 - Core 1 - 2402 MHz Band Edge Frequency 2390 MHz**

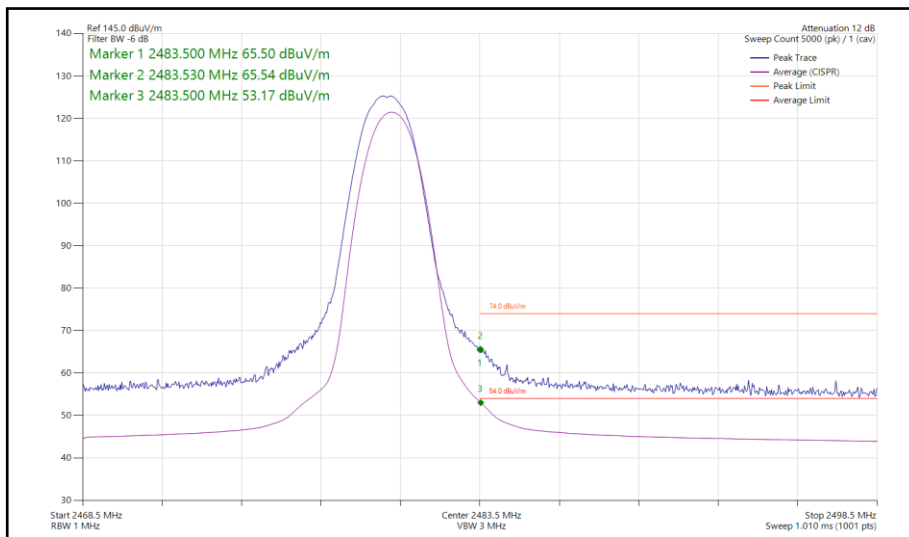

**Figure 35 - Bluetooth 2-DH5, MIMO, Core 0 - Core 1 - 2480 MHz Band Edge Frequency 2483.5 MHz**

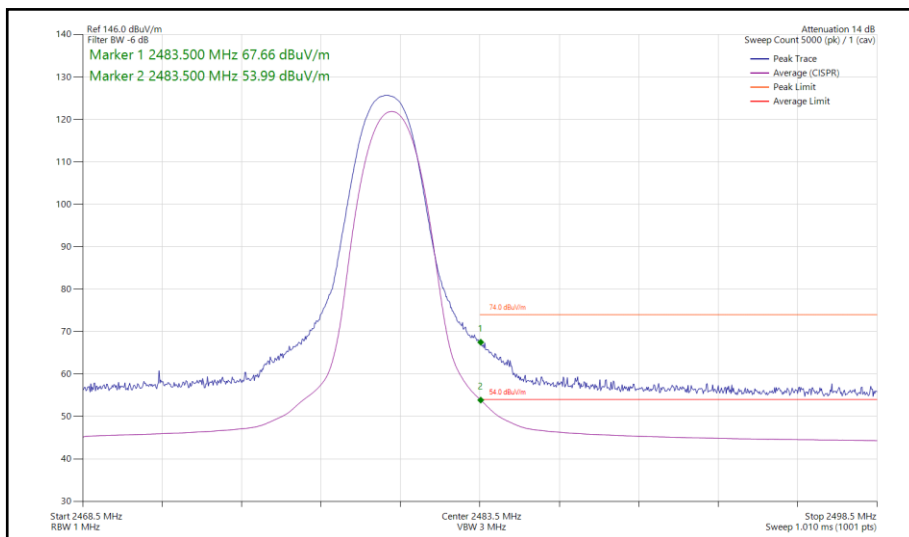

**Figure 36 - Bluetooth 3-DH5, MIMO, Core 0 - Core 1 - 2480 MHz Band Edge Frequency 2483.5 MHz**

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

**Table 14**



### 2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 and RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	11-Sep-2024
Test Receiver	Rohde & Schwarz	ESW44	5914	12	24-May-2025
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5997	12	14-Sep-2024
Cable (N to N 1m)	Junkosha	MWX221-01000NMSNMS/B	5999	12	20-May-2025
Cable (SMA to SMA 4.5m)	Junkosha	MWX221-04500AMSAMS/A	6002	12	14-Sep-2024
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	20-May-2025
Cable (SMA to SMA 6.5m)	Junkosha	MWX221-06500AMSAMS/B	6014	12	24-Aug-2024
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6018	12	10-Jun-2025
Cable (SMA to SMA 3m)	Junkosha	MWX221-03000AMSAMS/A	6021	12	14-Sep-2024
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	05-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	05-May-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025
Humidity & Temperature meter	R.S Components	1364	6148	12	29-Jul-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	22-Dec-2024
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	18-Dec-2024



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (SMA to SMA 3m)	Junkosha	MWX221-03000AMSAMS/A	6316	12	04-Feb-2025
Cable (SMA to SMA 8m)	Junkosha	MWX221-08000AMSAMS/B	6319	12	04-Feb-2025
Humidity and Temperature Meter	R.S Components	1364	6486	12	04-Jun-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6740	12	01-Feb-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6741	12	01-Feb-2025
6.5m Cable	Junkosha	MWX221-06500AMSAMS/B	6744	12	01-Feb-2025

**Table 15**

TU - Traceability Unscheduled  
O/P Mon - Output Monitored using calibrated equipment



## **2.2 Frequency Hopping Systems - Average Time of Occupancy**

### **2.2.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)

### **2.2.2 Equipment Under Test and Modification State**

A3186, S/N: M44MHNWLH2 - Modification State 0  
A3186, S/N: LXXD3YHT0L - Modification State 0

### **2.2.3 Date of Test**

03-September-2024 to 12-September-2024

### **2.2.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 7.8.4.

### **2.2.5 Environmental Conditions**

Ambient Temperature	21.5 - 22.7 °C
Relative Humidity	52.1 - 58.2 %



2.2.6 Test Results

2.4 GHz Bluetooth BDR/EDR

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.897	112	324.5	400.0

Table 16 - Time of Occupancy Results

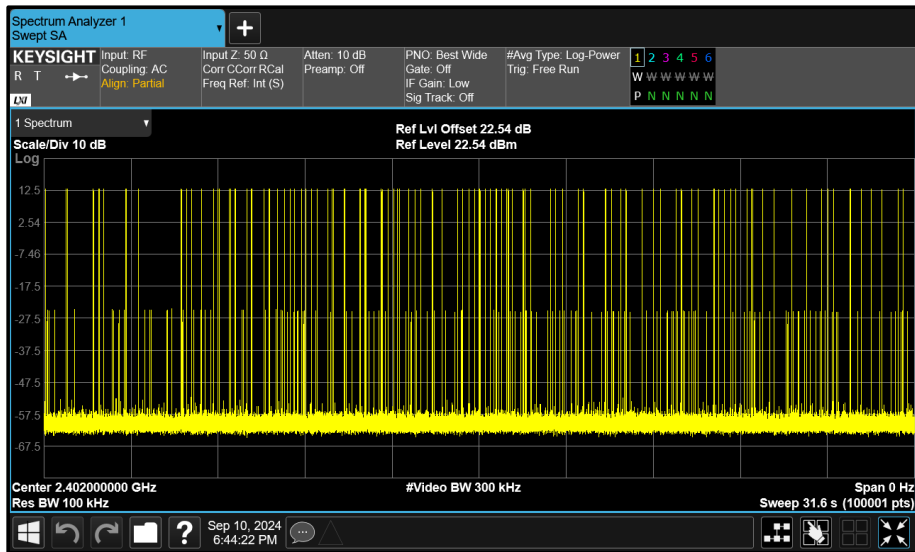


Figure 37 - GFSK - 2402 MHz Accumulated Transmit Time





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.899	106	307.3	400.0

Table 17 - Time of Occupancy Results



Figure 38 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.893	102	295.0	400.0

**Table 18 - Time of Occupancy Results**



**Figure 39 - 8-DPSK - 2402 MHz Accumulated Transmit Time**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	111	320.6	400.0

**Table 19 - Time of Occupancy Results**



**Figure 40 - GFSK - 2402 MHz Accumulated Transmit Time**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.903	125	362.8	400.0

Table 20 - Time of Occupancy Results



Figure 41 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.905	101	293.4	400.0

**Table 21 - Time of Occupancy Results**



**Figure 42 - 8-DPSK - 2402 MHz Accumulated Transmit Time**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.903	125	362.9	400.0

Table 22 - Time of Occupancy Results



Figure 43 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	77.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.893	102	295.1	400.0

**Table 23 - Time of Occupancy Results**



**Figure 44 - 8-DPSK - 2402 MHz Accumulated Transmit Time**




Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.891	110	318.0	400.0

**Table 24 - Time of Occupancy Results**

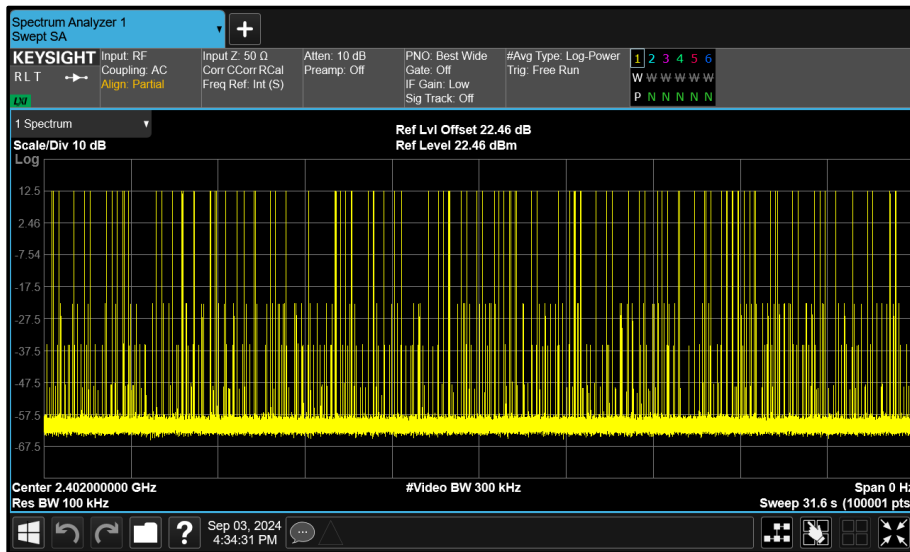

**Figure 45 - GFSK - 2402 MHz Accumulated Transmit Time**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.901	96	278.5	400.0

**Table 25 - Time of Occupancy Results**



**Figure 46 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.896	119	344.6	400.0

**Table 26 - Time of Occupancy Results**



**Figure 47 - 8-DPSK - 2402 MHz Accumulated Transmit Time**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.910	109	317.2	400.0

Table 27 - Time of Occupancy Results

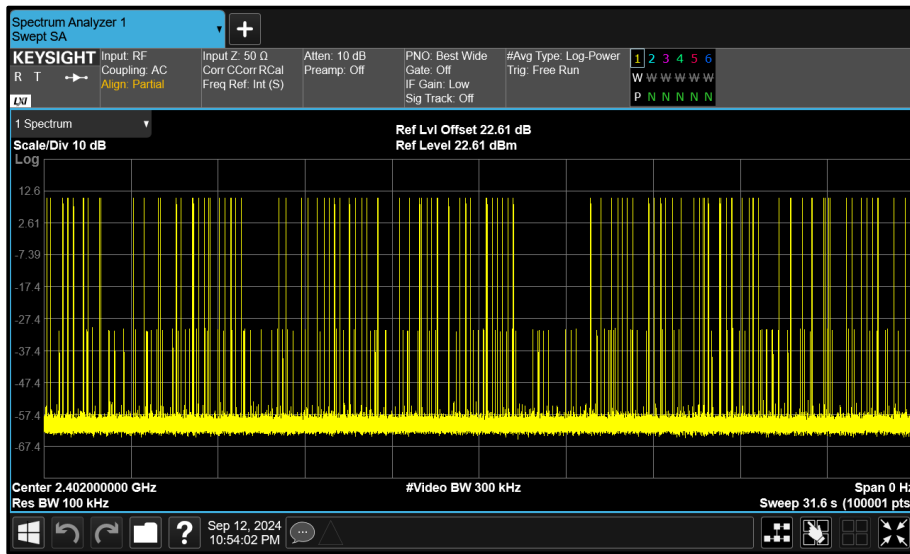


Figure 48 -  $\pi/4$  DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	77.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.896	108	312.8	400.0

**Table 28 - Time of Occupancy Results**



**Figure 49 - 8-DPSK - 2402 MHz Accumulated Transmit Time**

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.



**2.2.7 Test Location and Test Equipment Used**

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5919	24	18-Mar-2026
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	08-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6522	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	22-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

**Table 29**

O/P Mon - Output Monitored using calibrated equipment



## **2.3 Frequency Hopping Systems - Channel Separation**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)

### **2.3.2 Equipment Under Test and Modification State**

A3186, S/N: M44MHNWLH2 - Modification State 0  
A3186, S/N: LXXD3YHT0L - Modification State 0

### **2.3.3 Date of Test**

03-September-2024 to 12-September-2024

### **2.3.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 7.8.2.

### **2.3.5 Environmental Conditions**

Ambient Temperature	21.4 - 21.5 °C
Relative Humidity	52.1 - 58.2 %



2.3.6 Test Results

2.4 GHz Bluetooth BDR/EDR

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.928	2441.012	2442.014	1.002	≥618.8

Table 30 - Carrier Frequency Separation Results

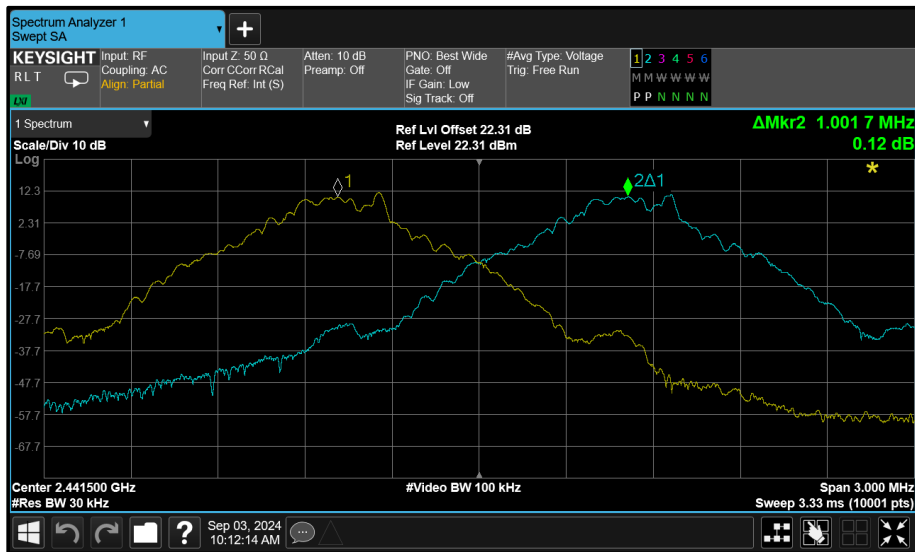


Figure 50 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.351	2440.995	2441.996	1.001	$\geq 900.5$

Table 31 - Carrier Frequency Separation Results

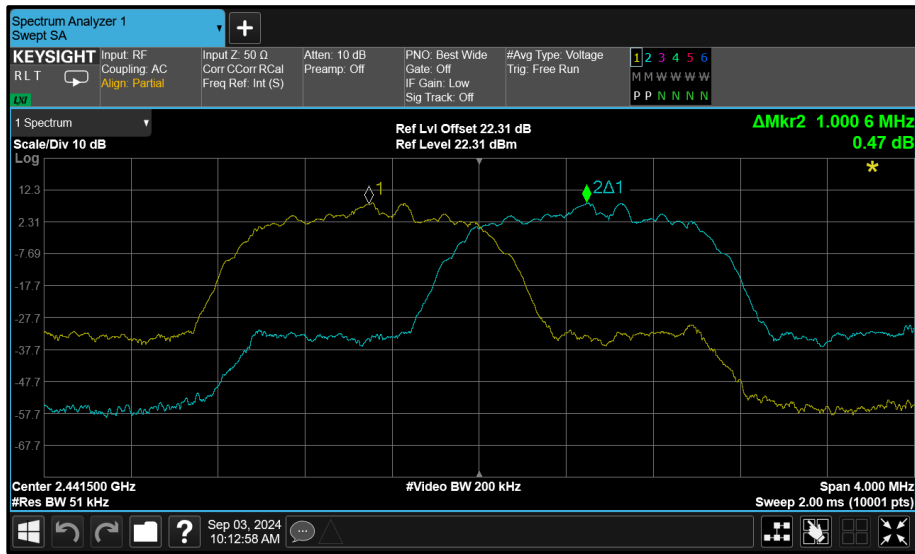


Figure 51 -  $\pi/4$  DQPSK - 2441 MHz (CH39)





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.322	2441.003	2442.003	0.999	≥881.6

Table 32 - Carrier Frequency Separation Results

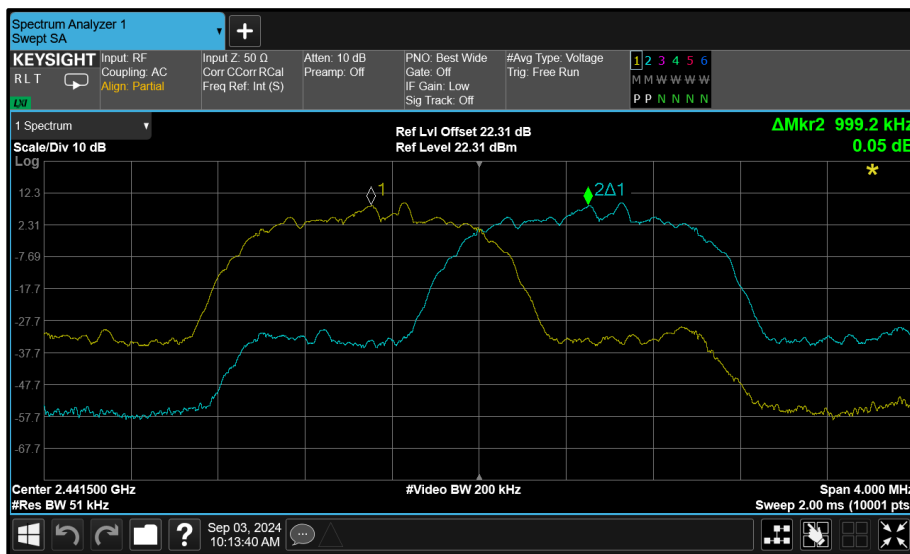


Figure 52 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.928	2441.014	2442.015	1.001	≥618.4

Table 33 - Carrier Frequency Separation Results



Figure 53 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.351	2440.996	2441.996	1.000	$\geq 900.5$

Table 34 - Carrier Frequency Separation Results

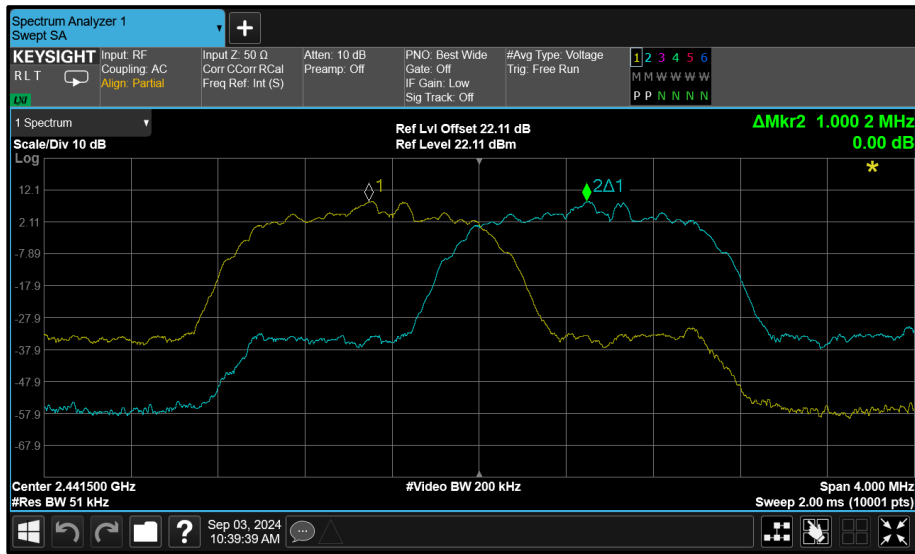


Figure 54 -  $\pi/4$  DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.324	2441.004	2442.003	1.000	≥882.7

Table 35 - Carrier Frequency Separation Results

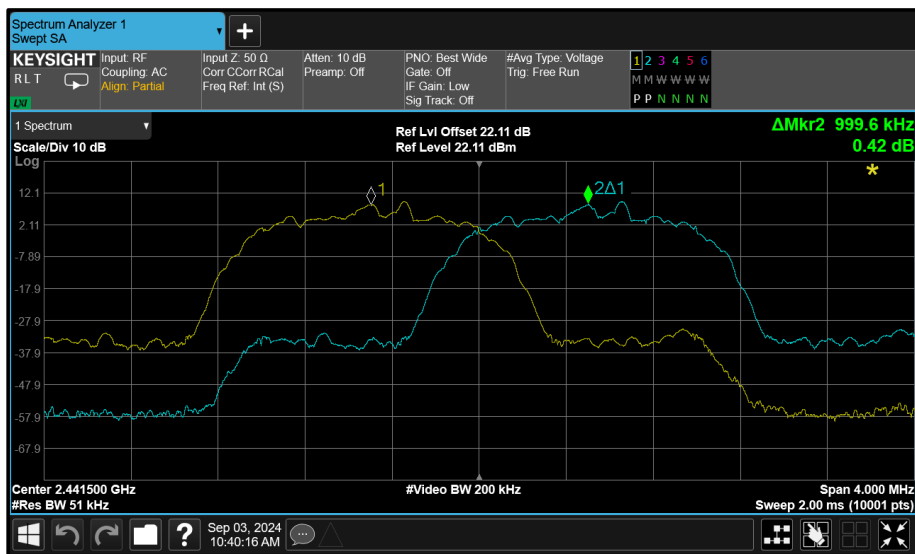


Figure 55 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.352	2440.995	2441.995	1.000	$\geq 901.3$

Table 36 - Carrier Frequency Separation Results

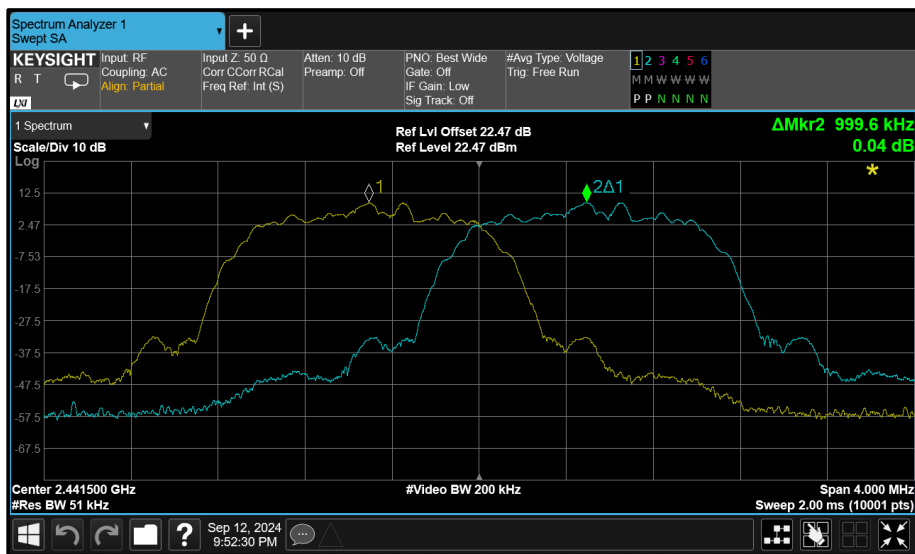


Figure 56 -  $\pi/4$  DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.322	2441.002	2442.003	1.000	≥881.6

Table 37 - Carrier Frequency Separation Results



Figure 57 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.009	2440.987	2441.994	1.007	≥672.4

Table 38 - Carrier Frequency Separation Results



Figure 58 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.357	2441.004	2442.003	0.999	$\geq 904.5$

Table 39 - Carrier Frequency Separation Results

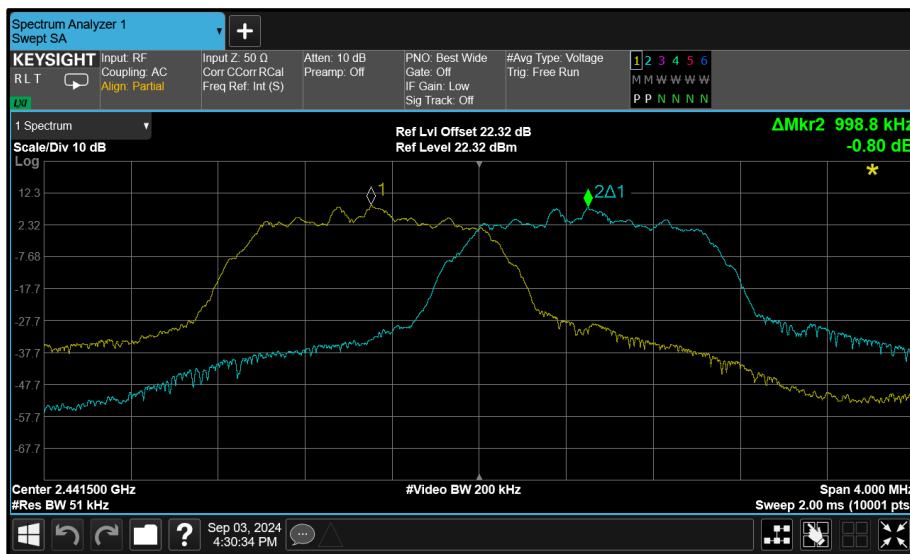


Figure 59 -  $\pi/4$  DQPSK - 2441 MHz (CH39)





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.323	2441.000	2442.000	1.000	≥882.1

Table 40 - Carrier Frequency Separation Results

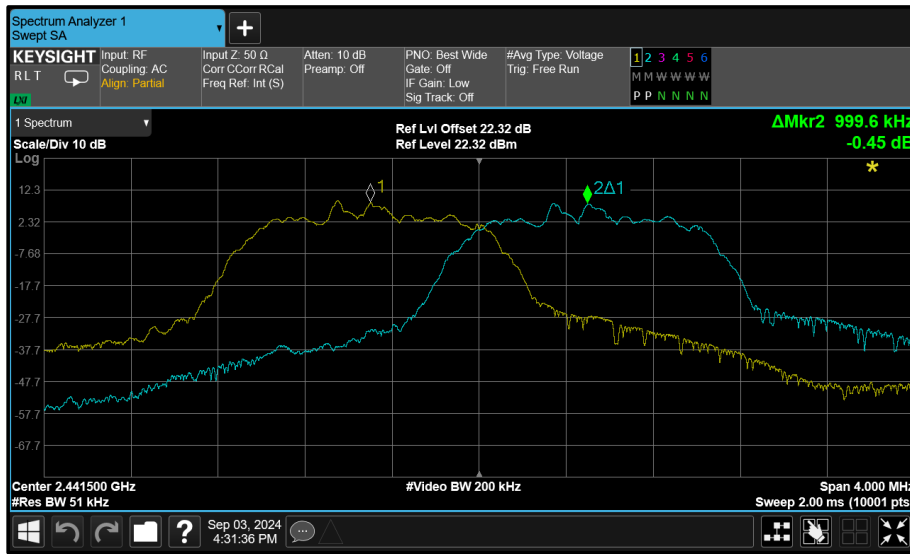


Figure 60 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.355	2440.995	2441.993	0.998	$\geq 903.5$

Table 41 - Carrier Frequency Separation Results



Figure 61 -  $\pi/4$  DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.320	2441.002	2442.002	1.000	≥880.3

**Table 42 - Carrier Frequency Separation Results**



**Figure 62 - 8-DPSK - 2441 MHz (CH39)**

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.



**2.3.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5919	24	18-Mar-2026
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	08-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6522	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	22-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

**Table 43**

O/P Mon - Output Monitored using calibrated equipment