

FCC Test Report

Apple Inc
Model: A3186



In accordance with FCC 47 CFR Part 15C
(Thread)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA

FCC ID: BCGA3186

COMMERCIAL-IN-CONFIDENCE

Document 75961394-105 Issue 01

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steve White	Technical Support Specialist	Authorised Signatory	16 October 2024

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Rachael Watkins	16 October 2024	

FCC Accreditation
553713/UK2026 Concorde Park, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2023 for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2024 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	5
1.6	Identification of the EUT	5
1.7	EUT Modification Record	5
1.8	Test Location	6
2	Test Details	7
2.1	Restricted Band Edges.....	7
2.2	Emission Bandwidth	15
2.3	Maximum Conducted Output Power	27
2.4	Authorised Band Edges	34
2.5	Spurious Radiated Emissions	42
2.6	Power Spectral Density	66
3	Measurement Uncertainty	71



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	16-October-2024

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2023
Start of Test	29-July-2024
Finish of Test	06-September-2024
Name of Engineer(s)	Akhil Rajendran Bhaskaran Nair, Vineeth Nagaraj, Mustafa Murad, Elliot Callender, Ian Hart and Ioan-Alexandru Bogatu.
Related Document(s)	ANSI C63.10 (2020)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: Thread				
-	15.203	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	Restricted Band Edges	Pass	ANSI C63.10 (2020)
2.2	15.247 (a)(2)	Emission Bandwidth	Pass	ANSI C63.10 (2020)
2.3	15.247 (b)	Maximum Conducted Output Power	Pass	ANSI C63.10 (2020)
2.4	15.247 (d)	Authorised Band Edges	Pass	ANSI C63.10 (2020)
2.5	15.209 and 15.247 (d)	Spurious Radiated Emissions	Pass	ANSI C63.10 (2020)
2.6	15.247 (e)	Power Spectral Density	Pass	ANSI C63.10 (2020)

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

1.4.2 Test Modes

The EUT's 2.4 GHz Thread radio supports SISO operation on three different cores. Thread operation does not support any MIMO modes.

It also operates at two power settings: low power "iPA" and high power "ePA", except for core 2 which only supports the lower power mode.

The EUT uses the same output power per core for each power setting, but the antenna gains vary, resulting in a different radiated power per core.

The EUT was tested in the following modes:

SISO modes:

- iPA Core 0
- iPA Core 1
- iPA Core 2
- ePA Core 0
- ePA Core 1

1.4.3 Test Setup

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all tests the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands to ensure the measured signals were representative.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

1.4.4 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	2400 to 2480	3.3	0.71
Core 1	2400 to 2480	6.3	0.71
Dedicated Core	2400 to 2480	5.2	0.71

Table 3



1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 Identification of the EUT

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3186			
Serial Number	Hardware Version	Software Version	Firmware
GQFXQXKN7J	REV1.0	24A32191n	22.1.65.459
GX4WD79J45	REV1.0	24A32191n	22.1.65.459
M44MHNWLH2	REV1.0	24A32190v	22.1.65.459
LXXD3YHT0L	REV1.0	24A32191n	22.1.65.459

Table 4

1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3186, Serial Number: GQFXQXKN7J			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3186, Serial Number: GX4WD79J45			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3186, Serial Number: M44MHNWLH2			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3186, Serial Number: LXXD3YHT0L			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5



1.8 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: Thread		
Restricted Band Edges	Akhil Rajendran Bhaskaran Nair and Vineeth Nagaraj	UKAS
Emission Bandwidth	Mustafa Murad	UKAS
Maximum Conducted Output Power	Mustafa Murad	UKAS
Authorised Band Edges	Akhil Rajendran Bhaskaran Nair and Vineeth Nagaraj	UKAS
Spurious Radiated Emissions	Elliot Callender, Ian Hart and Ioan-Alexandru Bogatu	UKAS
Power Spectral Density	Mustafa Murad	UKAS

Table 6

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205

2.1.2 Equipment Under Test and Modification State

A3186, S/N: GQFXQXKN7J - Modification State 0
A3186, S/N: GX4WD79J45 - Modification State 0

2.1.3 Date of Test

29-July-2024 to 01-August-2024

2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5 and 11.12.1.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 11.12.2.5.2.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

2.1.5 Environmental Conditions

Ambient Temperature	23.3 - 23.9 °C
Relative Humidity	42.6 - 56.4 %




2.1.6 Test Results

Thread


iPA - Core 0 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBuV/m)
Thread	2405	2390	55.69	43.41
Thread	2475	2483.5	54.35	42.20

Table 7 - iPA, Core 0, SISO Restricted Band Edge Results

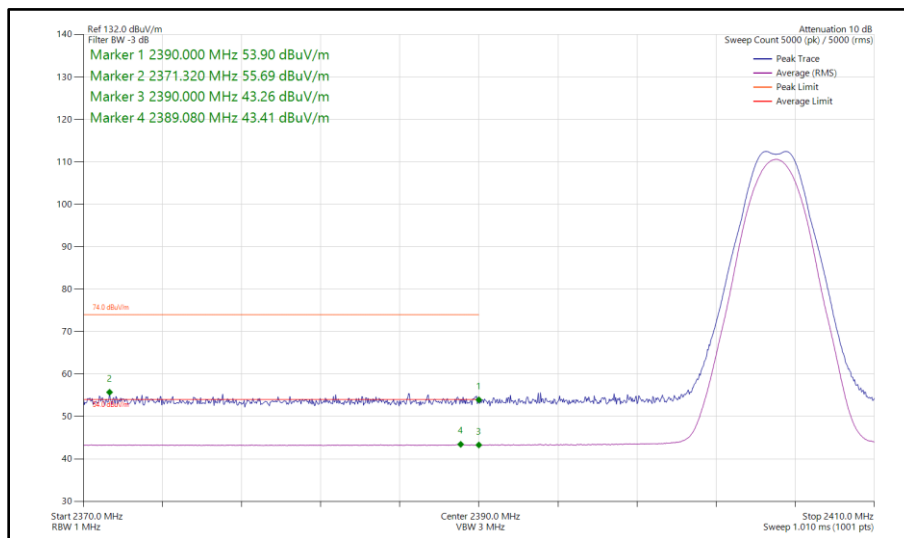

**Figure 1 - Thread, iPA, SISO, Core 0 - 2405 MHz
 Band Edge Frequency 2390 MHz**

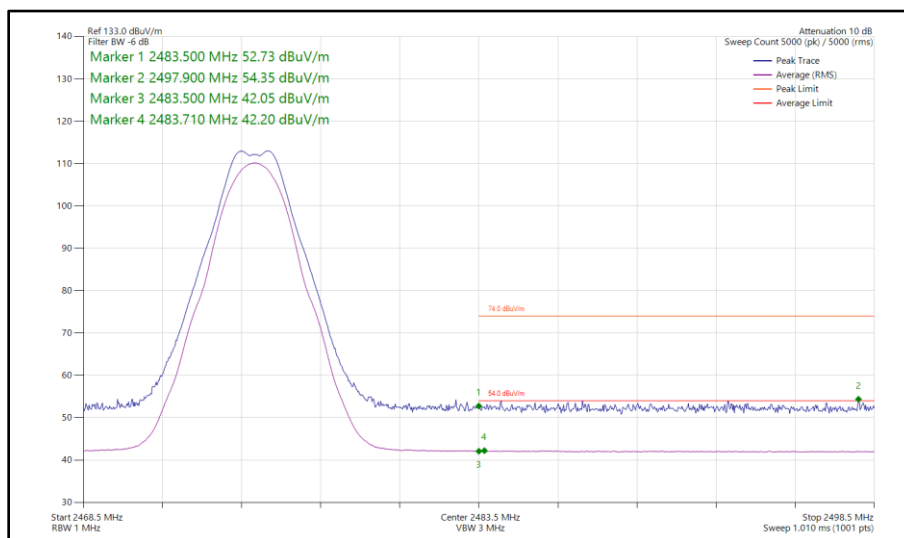


**Figure 2 - Thread, iPA, SISO, Core 0 - 2475 MHz
 Band Edge Frequency 2483.5 MHz**




iPA - Core 1 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBuV/m)
Thread	2405	2390	56.02	43.90
Thread	2475	2483.5	54.81	43.14

Table 8 - iPA, Core 1, SISO Restricted Band Edge Results

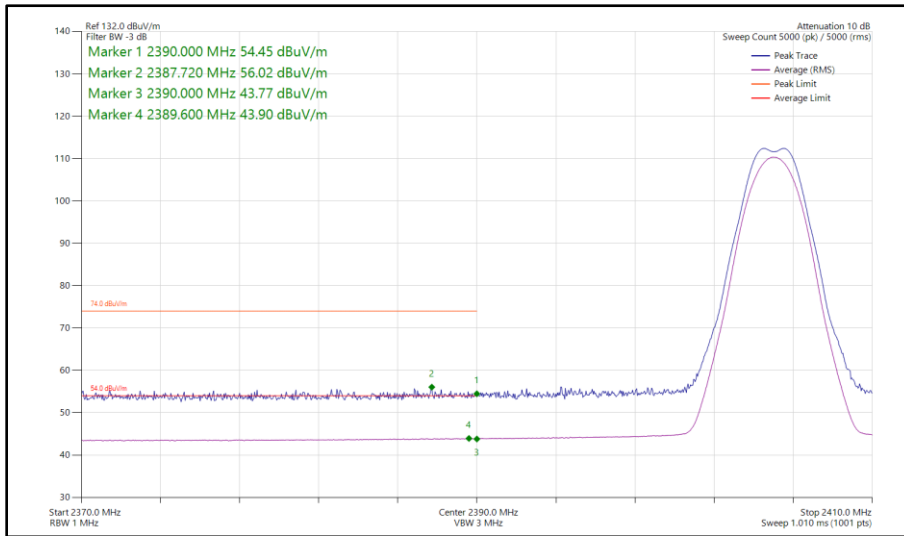

**Figure 3 - Thread, iPA, SISO, Core 1 - 2405 MHz
 Band Edge Frequency 2390 MHz**

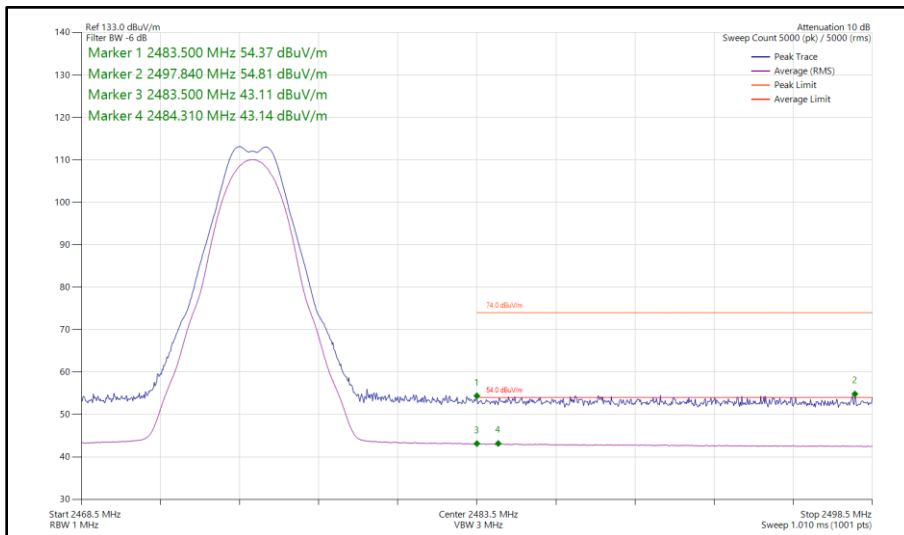


**Figure 4 - Thread, iPA, SISO, Core 1 - 2475 MHz
 Band Edge Frequency 2483.5 MHz**




iPA - Core 2 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Thread	2405	2390	55.22	43.40
Thread	2475	2483.5	54.42	42.17

Table 9 - iPA, Core 2, SISO Restricted Band Edge Results

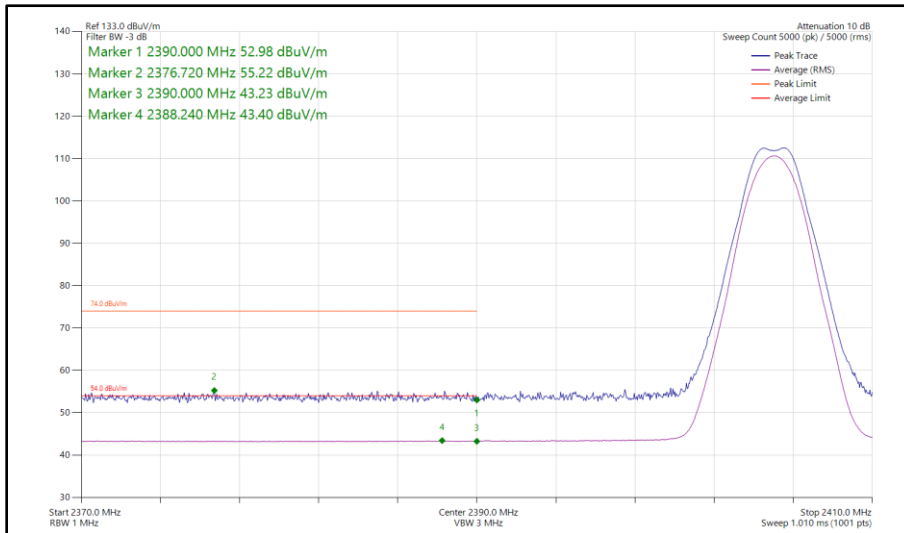

**Figure 5 - Thread, iPA, SISO, Core 2 - 2405 MHz
 Band Edge Frequency 2390 MHz**

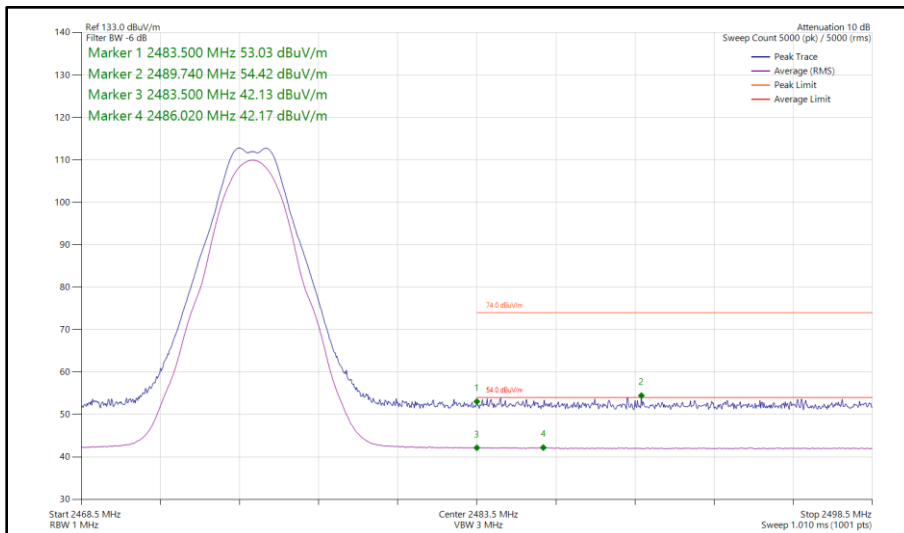

**Figure 6 - Thread, iPA, SISO, Core 2 - 2475 MHz
 Band Edge Frequency 2483.5 MHz**



ePA - Core 0 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBuV/m)
Thread	2405	2390	57.70	45.86
Thread	2475	2483.5	56.73	45.16

Table 10 - ePA, Core 0, SISO Restricted Band Edge Results

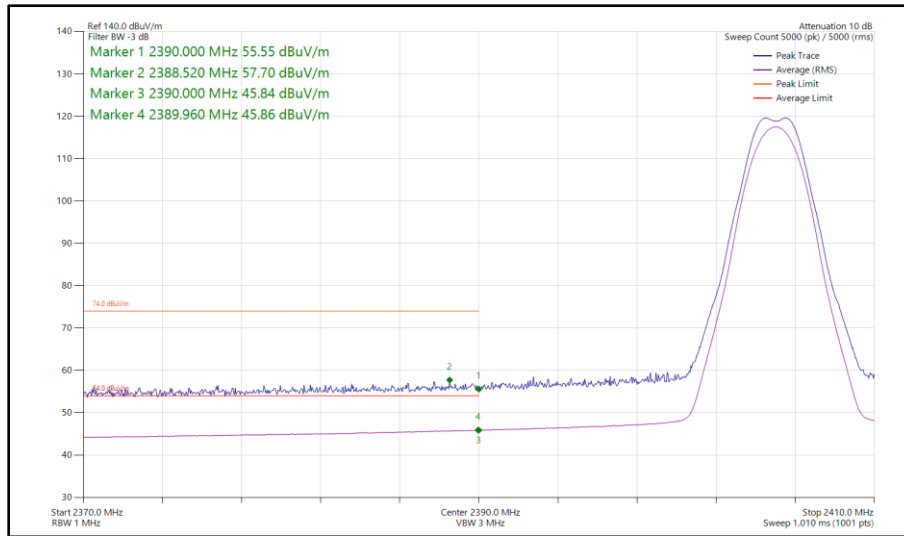


Figure 7 - Thread, ePA, SISO, Core 0 - 2405 MHz
 Band Edge Frequency 2390 MHz

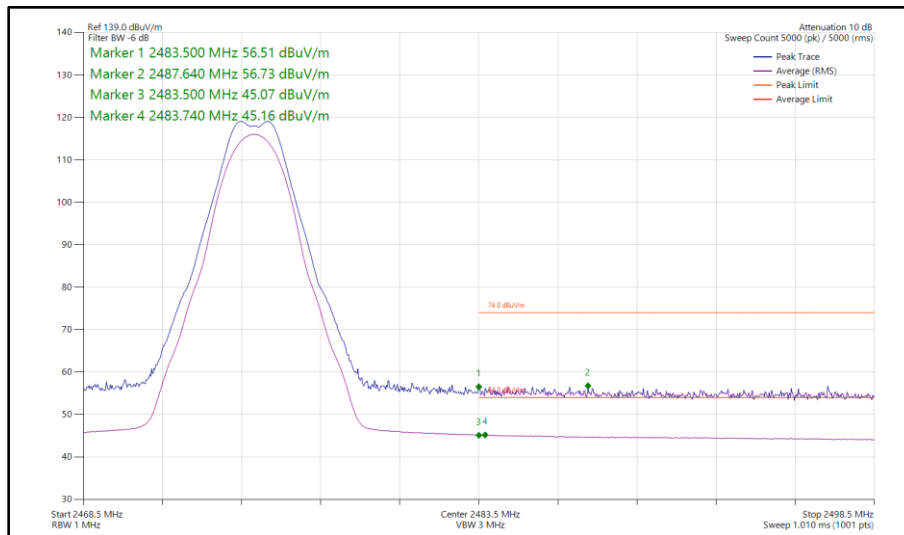


Figure 8 - Thread, ePA, SISO, Core 0 - 2475 MHz
 Band Edge Frequency 2483.5 MHz



ePA - Core 1 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Thread	2405	2390	57.82	46.01
Thread	2475	2483.5	57.25	45.78

Table 11 - ePA, Core 1, SISO Restricted Band Edge Results

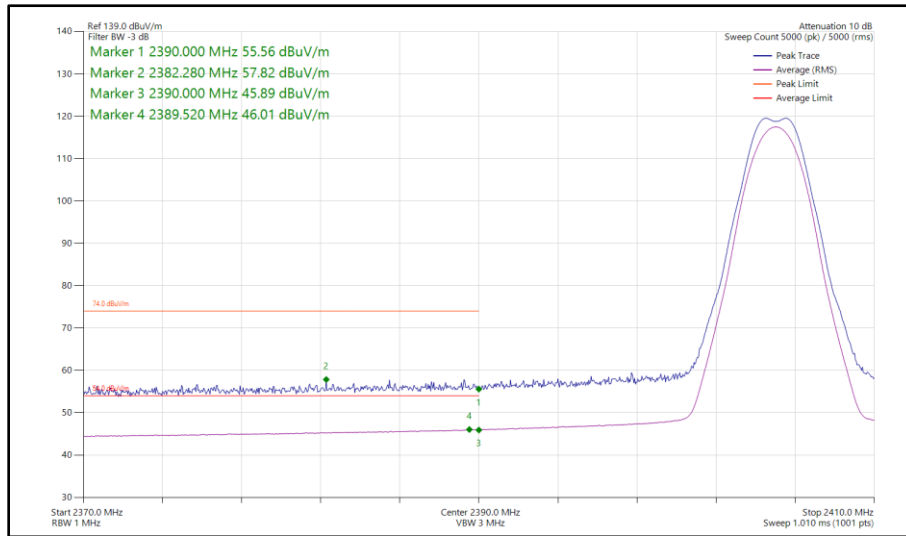


Figure 9 - Thread, ePA, SISO, Core 1 - 2405 MHz
 Band Edge Frequency 2390 MHz

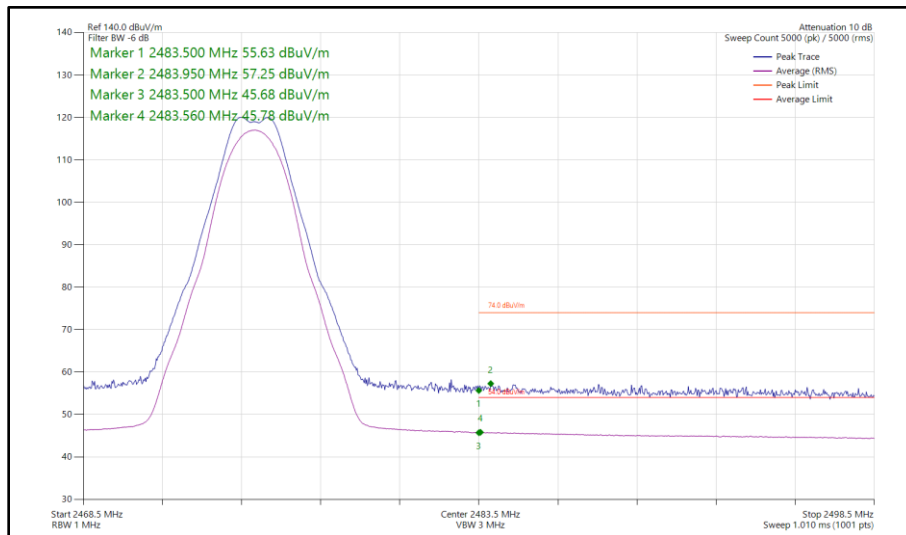


Figure 10 - Thread, ePA, SISO, Core 1 - 2475 MHz
 Band Edge Frequency 2483.5 MHz



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 12

2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 and RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	11-Sep-2024
Test Receiver	Rohde & Schwarz	ESW44	5914	12	24-May-2025
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5997	12	14-Sep-2024
Cable (N to N 1m)	Junkosha	MWX221-01000NMSNMS/B	5999	12	20-May-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	20-May-2025
Cable (SMA to SMA 6.5m)	Junkosha	MWX221-06500AMSAMS/B	6014	12	24-Aug-2024
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6018	12	10-Jun-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	05-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	05-May-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	22-Dec-2024
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	18-Dec-2024
Cable (SMA to SMA 8m)	Junkosha	MWX221-08000AMSAMS/B	6319	12	04-Feb-2025
Humidity and Temperature meter	R.S Components	1364	6346	12	06-Mar-2025
Humidity and Temperature Meter	R.S Components	1364	6486	12	04-Jun-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6740	12	01-Feb-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6741	12	01-Feb-2025
6.5m Cable	Junkosha	MWX221-06500AMSAMS/B	6744	12	01-Feb-2025

Table 13

TU - Traceability Unscheduled
 O/P Mon - Output Monitored using calibrated equipment.



2.2 Emission Bandwidth

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)

2.2.2 Equipment Under Test and Modification State

A3186, S/N: M44MHNWLH2 - Modification State 0

2.2.3 Date of Test

06-September-2024

2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.8.1 for 6 dB BW and 6.9.3 for 99% occupied bandwidth measurements.

2.2.5 Environmental Conditions

Ambient Temperature	20.9 °C
Relative Humidity	58.4 %



2.2.6 Test Results

Thread

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	1.590	-	-	-	≥500.0
2440	1.600	-	-	-	≥500.0
2475	1.600	-	-	-	≥500.0

Table 14 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	2.320	-	-	-	-
2440	2.320	-	-	-	-
2475	2.320	-	-	-	-

Table 15 - 99% Bandwidth Results

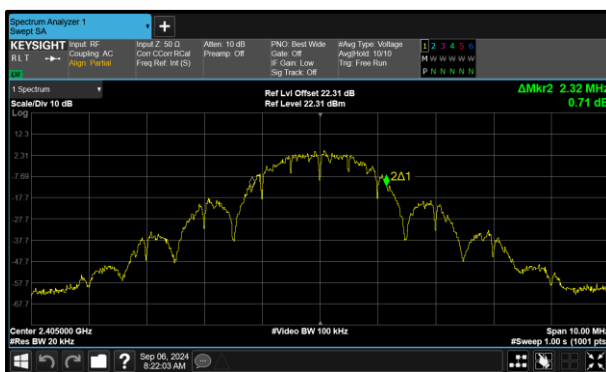


Figure 11 - Core 0 (A) 2405 MHz (CH11) 99% Bandwidth

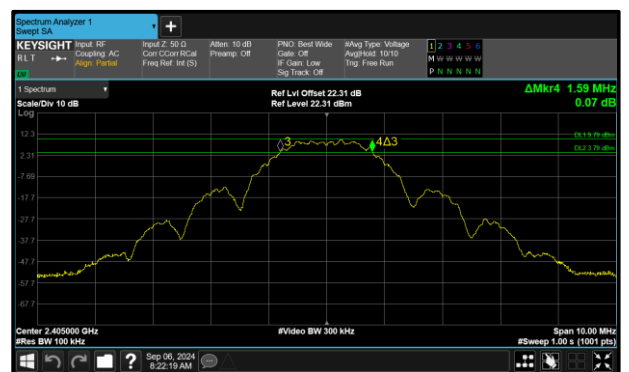


Figure 12 - Core 0 (A) 2405 MHz (CH11) 6 dB Bandwidth

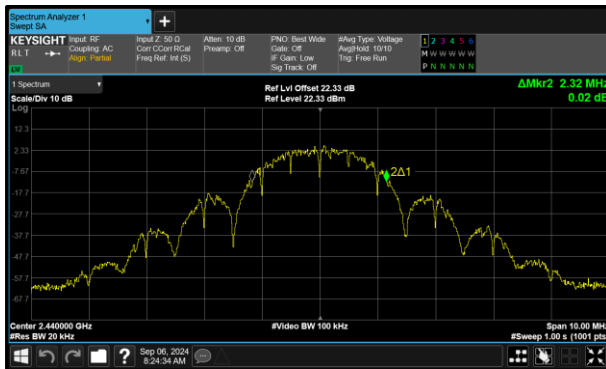


Figure 13 - Core 0 (A) 2440 MHz (CH18) 99% Bandwidth

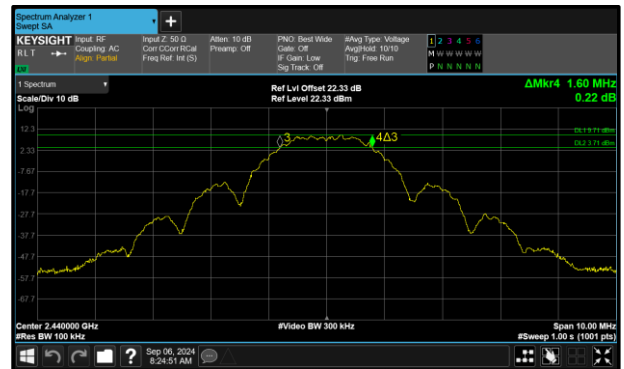


Figure 14 - Core 0 (A) 2440 MHz (CH18) 6 dB Bandwidth

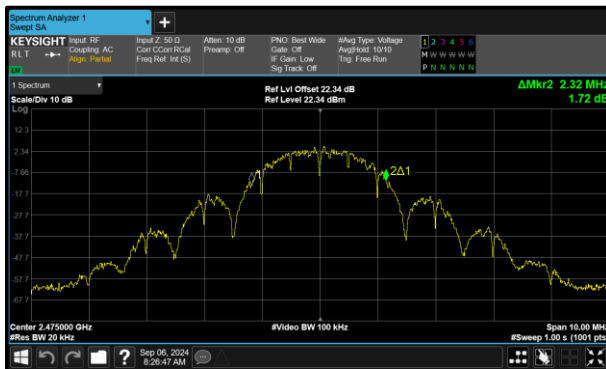


Figure 15 - Core 0 (A) 2475 MHz (CH25) 99% Bandwidth

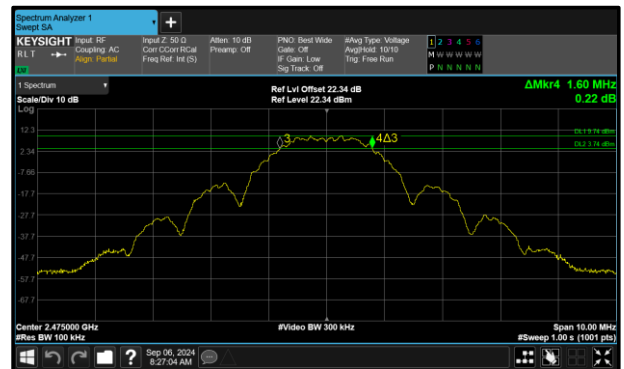


Figure 16 - Core 0 (A) 2475 MHz (CH25) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	1.590	-	-	≥500.0
2440	-	1.600	-	-	≥500.0
2475	-	1.590	-	-	≥500.0

Table 16 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	2.350	-	-	-
2440	-	2.340	-	-	-
2475	-	2.330	-	-	-

Table 17 - 99% Bandwidth Results

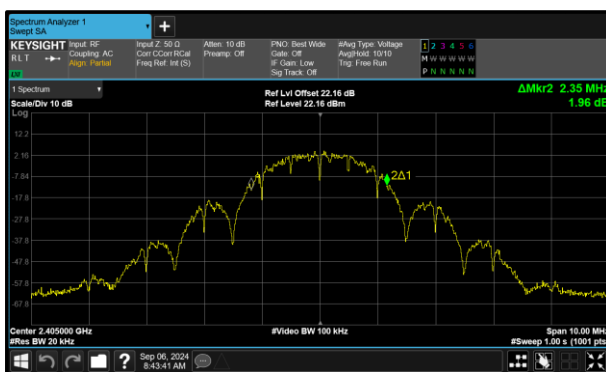


Figure 17 - Core 1 (B) 2405 MHz (CH11) 99% Bandwidth

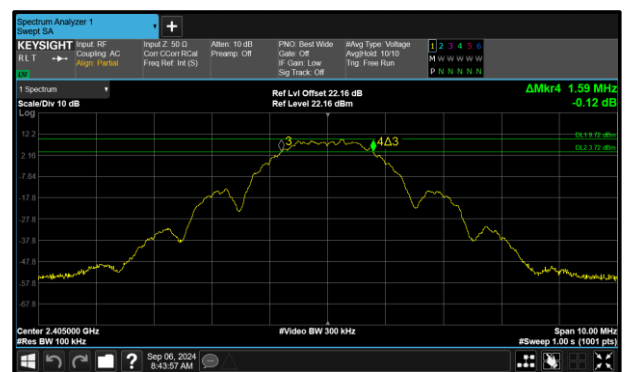


Figure 18 - Core 1 (B) 2405 MHz (CH11) 6 dB Bandwidth

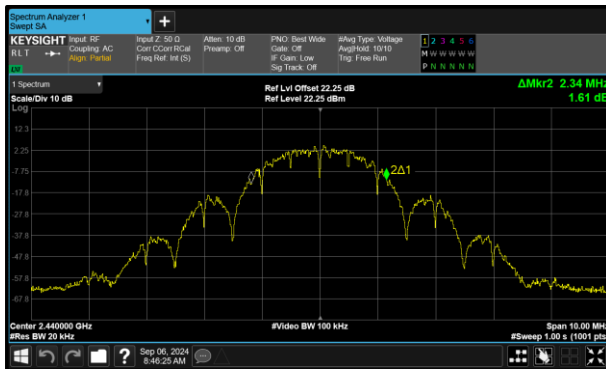


Figure 19 - Core 1 (B) 2440 MHz (CH18) 99% Bandwidth

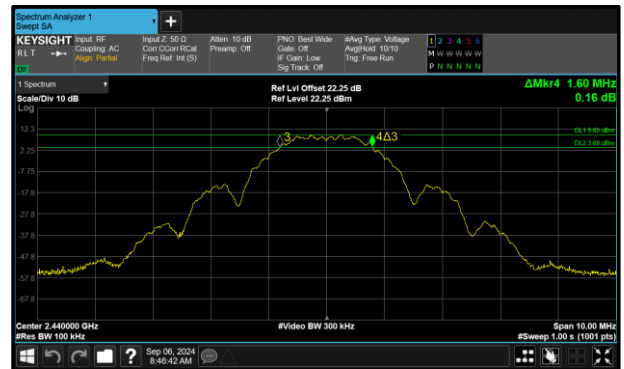


Figure 20 - Core 1 (B) 2440 MHz (CH18) 6 dB Bandwidth

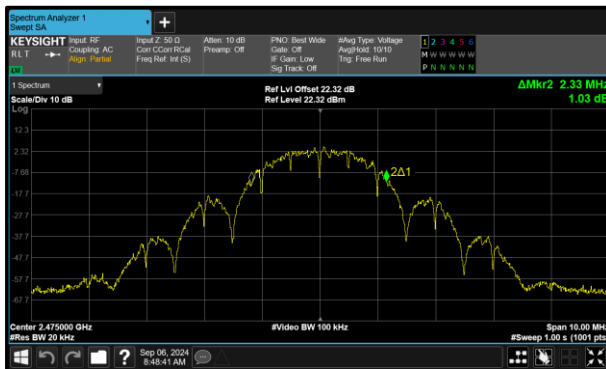


Figure 21 - Core 1 (B) 2475 MHz (CH25) 99% Bandwidth

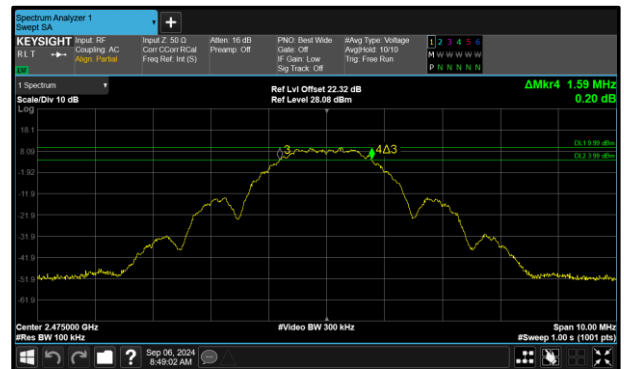


Figure 22 - Core 1 (B) 2475 MHz (CH25) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	C (Core 2)	Active Chain(s):	2

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	-	1.610	-	≥500.0
2440	-	-	1.610	-	≥500.0
2475	-	-	1.600	-	≥500.0

Table 18 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	-	2.340	-	-
2440	-	-	2.330	-	-
2475	-	-	2.330	-	-

Table 19 - 99% Bandwidth Results

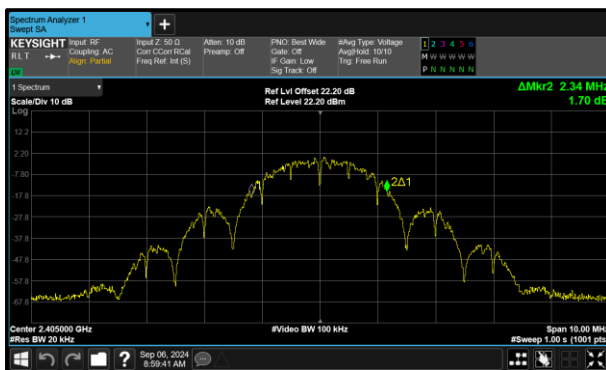


Figure 23 - Core 2 (C) 2405 MHz (CH11) 99% Bandwidth

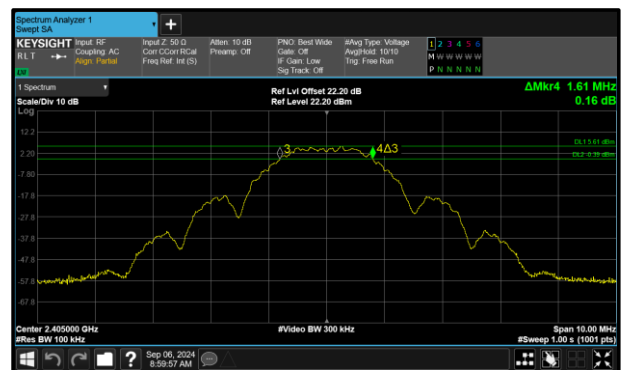


Figure 24 - Core 2 (C) 2405 MHz (CH11) 6 dB Bandwidth

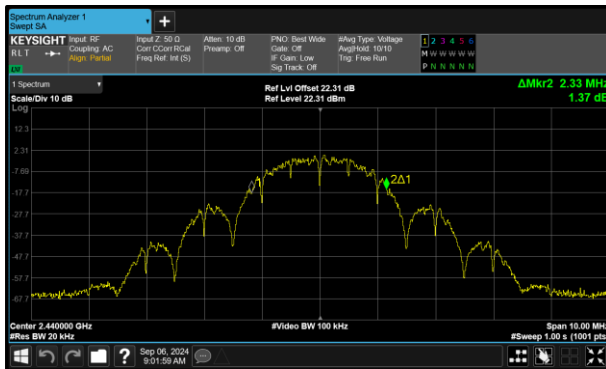


Figure 25 - Core 2 (C) 2440 MHz (CH18) 99% Bandwidth

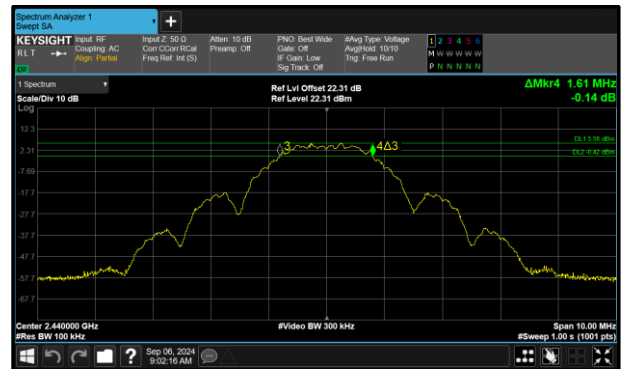


Figure 26 - Core 2 (C) 2440 MHz (CH18) 6 dB Bandwidth

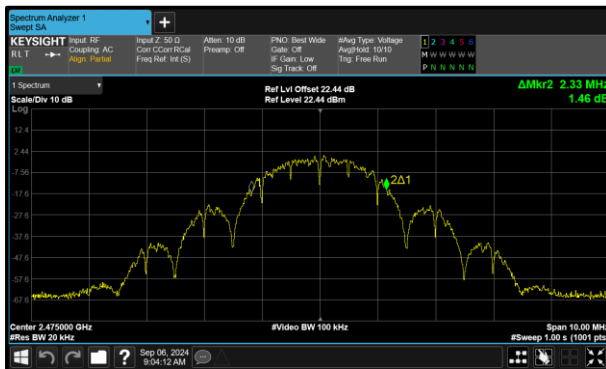


Figure 27 - Core 2 (C) 2475 MHz (CH25) 99% Bandwidth

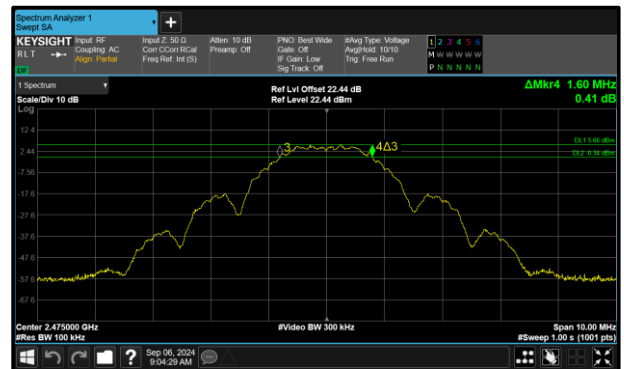


Figure 28 - Core 2 (C) 2475 MHz (CH25) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	1.610	-	-	-	≥500.0
2440	1.610	-	-	-	≥500.0
2475	1.600	-	-	-	≥500.0

Table 20 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	2.340	-	-	-	-
2440	2.340	-	-	-	-
2475	2.340	-	-	-	-

Table 21 - 99% Bandwidth Results

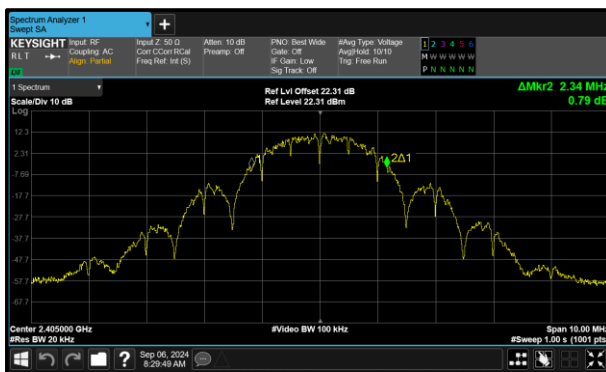


Figure 29 - Core 0 (A) 2405 MHz (CH11) 99% Bandwidth

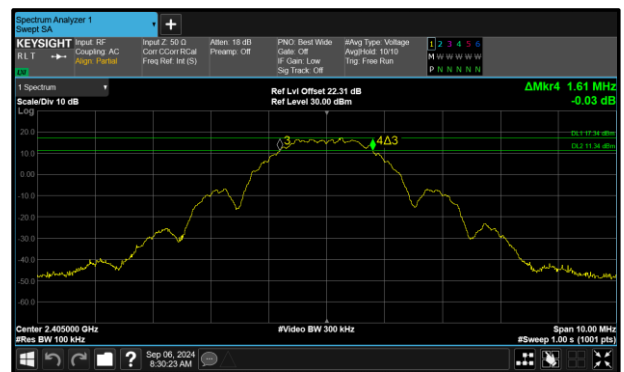


Figure 30 - Core 0 (A) 2405 MHz (CH11) 6 dB Bandwidth

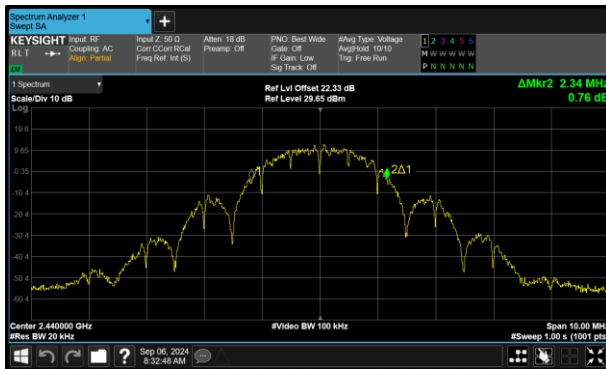


Figure 31 - Core 0 (A) 2440 MHz (CH18) 99% Bandwidth

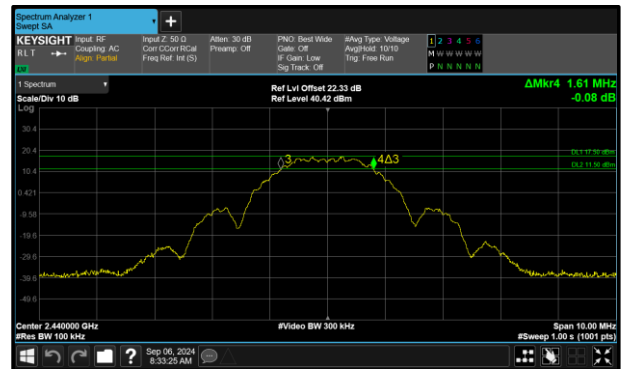


Figure 32 - Core 0 (A) 2440 MHz (CH18) 6 dB Bandwidth

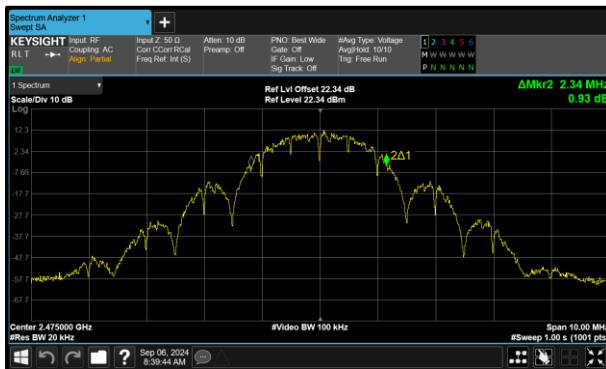


Figure 33 - Core 0 (A) 2475 MHz (CH25) 99% Bandwidth

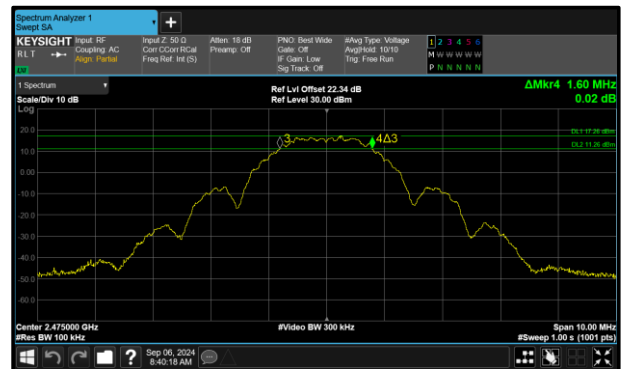


Figure 34 - Core 0 (A) 2475 MHz (CH25) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	1.600	-	-	≥500.0
2440	-	1.600	-	-	≥500.0
2475	-	1.610	-	-	≥500.0

Table 22 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	2.340	-	-	-
2440	-	2.340	-	-	-
2475	-	2.360	-	-	-

Table 23 - 99% Bandwidth Results

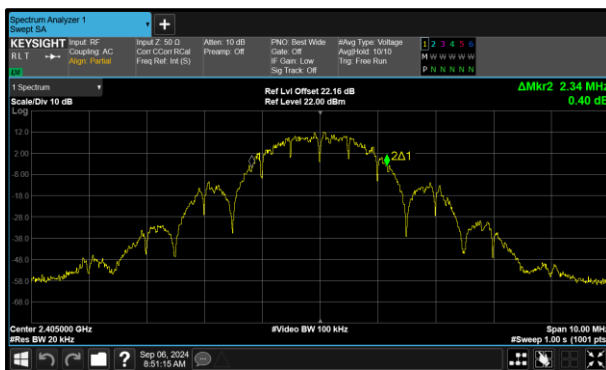


Figure 35 - Core 1 (B) 2405 MHz (CH11) 99% Bandwidth

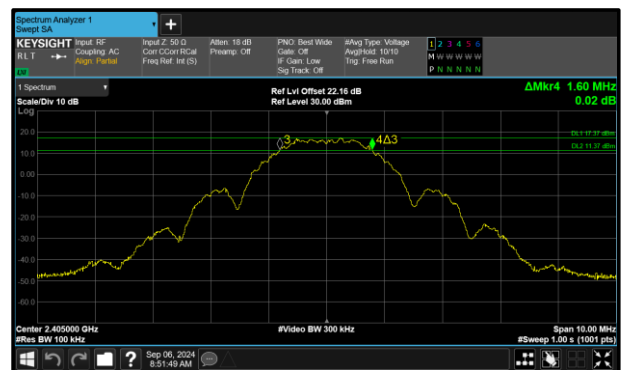


Figure 36 - Core 1 (B) 2405 MHz (CH11) 6 dB Bandwidth

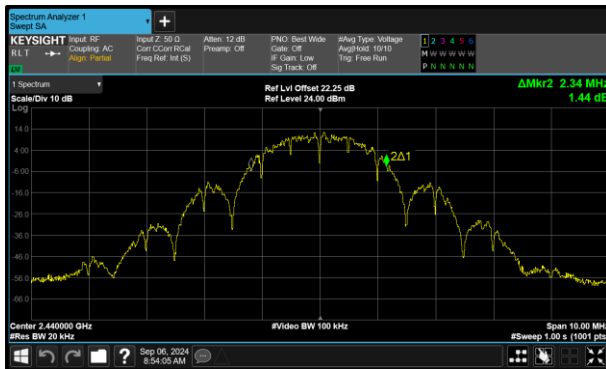


Figure 37 - Core 1 (B) 2440 MHz (CH18) 99% Bandwidth

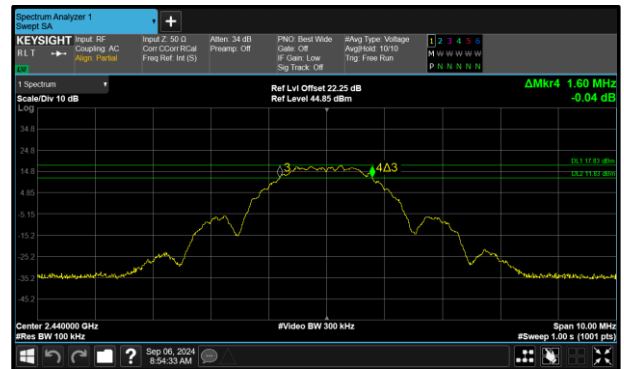


Figure 38 - Core 1 (B) 2440 MHz (CH18) 6 dB Bandwidth

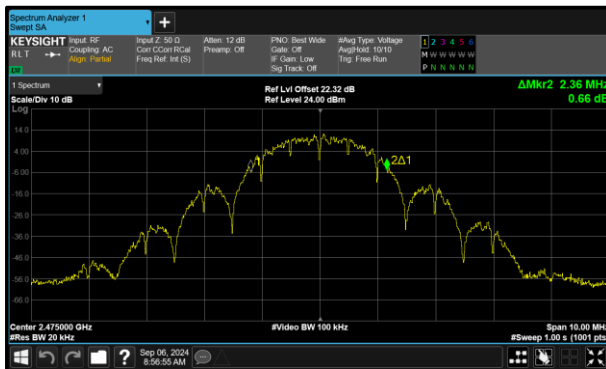


Figure 39 - Core 1 (B) 2475 MHz (CH25) 99% Bandwidth



Figure 40 - Core 1 (B) 2475 MHz (CH25) 6 dB Bandwidth

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2)

The minimum 6 dB Bandwidth shall be at least 500 kHz.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	26-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6531	12	16-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon

Table 24

O/P Mon - Output Monitored using calibrated equipment.



2.3 Maximum Conducted Output Power

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)

2.3.2 Equipment Under Test and Modification State

A3186, S/N: M44MHNWLH2 - Modification State 0
A3186, S/N: LXXD3YHT0L - Modification State 0

2.3.3 Date of Test

06-September-2024

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10 clause 11.9.2.3.2 using a power meter.

2.3.5 Environmental Conditions

Ambient Temperature	20.9 °C
Relative Humidity	58.4 %



2.3.6 Test Results

Thread

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	12.84	-	-	-	12.84	30.00	-17.16
2440	12.81	-	-	-	12.81	30.00	-17.19
2475	12.83	-	-	-	12.83	30.00	-17.17

Table 25 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	12.84	-	-	-	12.84	30.00	-17.16	16.14	36.00	-19.86
2440	12.81	-	-	-	12.81	30.00	-17.19	16.11	36.00	-19.89
2475	12.83	-	-	-	12.83	30.00	-17.17	16.13	36.00	-19.87

Table 26 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	-	12.83	-	-	12.83	29.70	-16.87
2440	-	13.00	-	-	13.00	29.70	-16.70
2475	-	12.97	-	-	12.97	29.70	-16.73

Table 27 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	-	12.83	-	-	12.83	30.00	-17.17	19.13	36.00	-16.87
2440	-	13.00	-	-	13.00	30.00	-17.00	19.30	36.00	-16.70
2475	-	12.97	-	-	12.97	30.00	-17.03	19.27	36.00	-16.73

Table 28 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.20
Active Port(s):	C (Core 2)	Active Chain(s):	2

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	-	-	8.76	-	8.76	30.00	-21.24
2440	-	-	8.96	-	8.96	30.00	-21.04
2475	-	-	8.68	-	8.68	30.00	-21.32

Table 29 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	-	-	8.76	-	8.76	30.00	-21.24	13.96	36.00	-22.04
2440	-	-	8.96	-	8.96	30.00	-21.04	14.16	36.00	-21.84
2475	-	-	8.68	-	8.68	30.00	-21.32	13.88	36.00	-22.12

Table 30 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	20.79	-	-	-	20.79	30.00	-9.21
2440	20.55	-	-	-	20.55	30.00	-9.45
2475	20.83	-	-	-	20.83	30.00	-9.17

Table 31 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	20.79	-	-	-	20.79	30.00	-9.21	24.09	36.00	-11.91
2440	20.55	-	-	-	20.55	30.00	-9.45	23.85	36.00	-12.15
2475	20.83	-	-	-	20.83	30.00	-9.17	24.13	36.00	-11.87

Table 32 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	-	20.66	-	-	20.66	29.70	-9.04
2440	-	20.91	-	-	20.91	29.70	-8.79
2475	-	20.52	-	-	20.52	29.70	-9.18

Table 33 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	-	20.66	-	-	20.66	30.00	-9.34	26.96	36.00	-9.04
2440	-	20.91	-	-	20.91	30.00	-9.09	27.21	36.00	-8.79
2475	-	20.52	-	-	20.52	30.00	-9.48	26.82	36.00	-9.18

Table 34 - ISED Maximum Conducted (average) Output Power Results

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6531	12	16-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6587	12	13-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6588	12	13-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6589	12	13-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon

Table 35

O/P Mon - Output Monitored using calibrated equipment



2.4 Authorised Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)

2.4.2 Equipment Under Test and Modification State

A3186, S/N: GX4WD79J45 - Modification State 0
A3186, S/N: GQFXQXKN7J - Modification State 0

2.4.3 Date of Test

29-July-2024 to 01-August-2024

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

2.4.5 Environmental Conditions

Ambient Temperature	23.3 - 23.9 °C
Relative Humidity	42.6 - 56.4 %




2.4.6 Test Results

Thread

iPA - Core 0 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-64.30

Table 36 - iPA, Core 0, SISO Authorised Band Edge Results

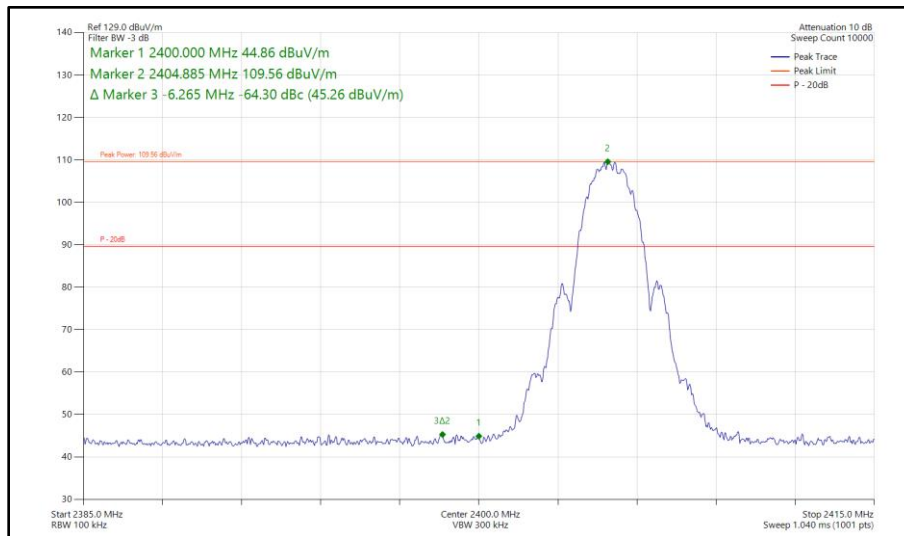


**Figure 41 - Thread, iPA, SISO, Core 0 - 2405 MHz
 Band Edge Frequency 2400 MHz**



iPA - Core 1 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-63.16

Table 37 - iPA, Core 1, SISO Authorised Band Edge Results

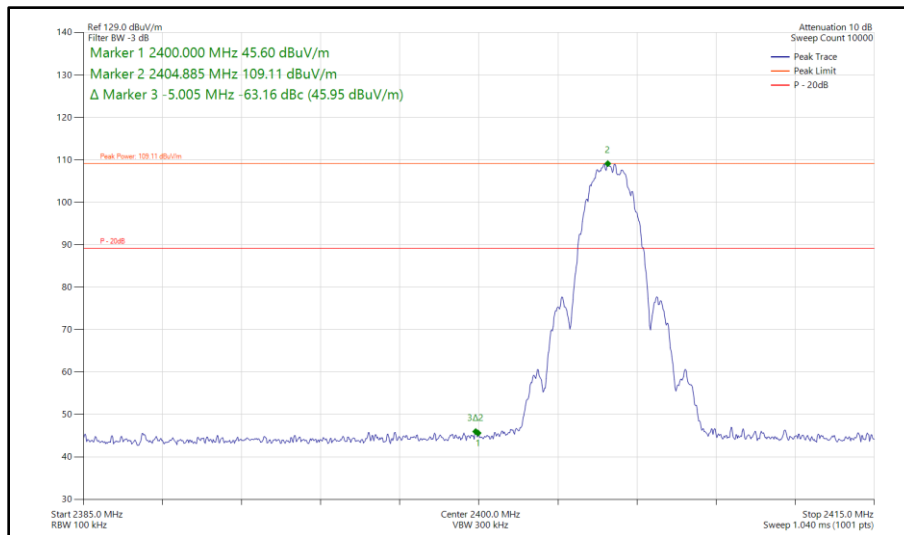


**Figure 42 - Thread, iPA, SISO, Core 1 - 2405 MHz
 Band Edge Frequency 2400 MHz**



iPA - Core 2 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-63.75

Table 38 - iPA, Core 2, SISO Authorised Band Edge Results

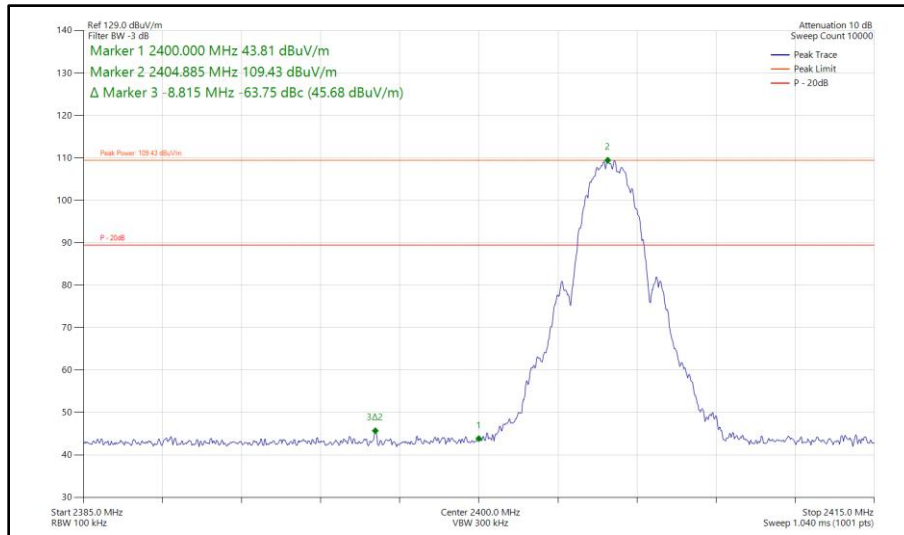


**Figure 43 - Thread, iPA, SISO, Core 2 - 2405 MHz
 Band Edge Frequency 2400 MHz**



ePA - Core 0 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-66.06

Table 39 - ePA, Core 0, SISO Authorised Band Edge Results

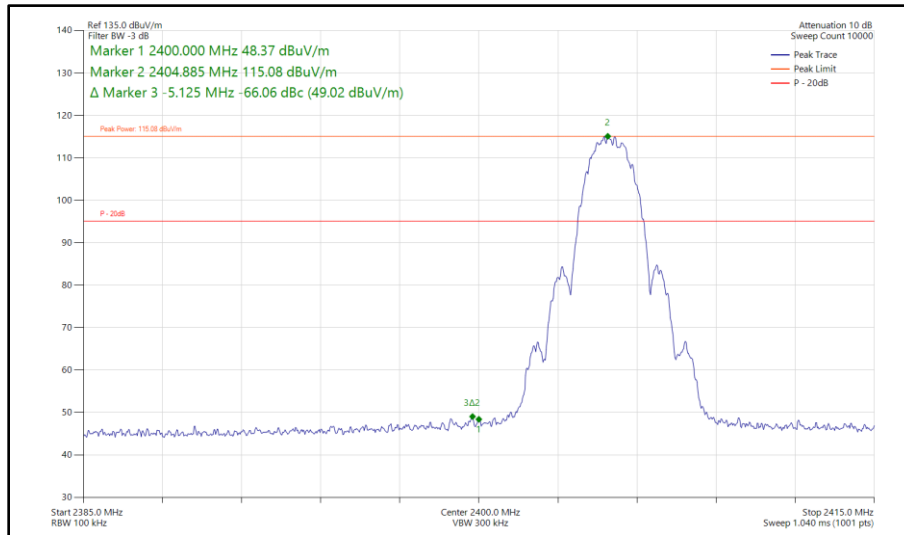


**Figure 44 - Thread, ePA, SISO, Core 0 - 2405 MHz
 Band Edge Frequency 2400 MHz**



ePA - Core 1 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-67.15

Table 40 - ePA, Core 1, SISO Authorised Band Edge Results

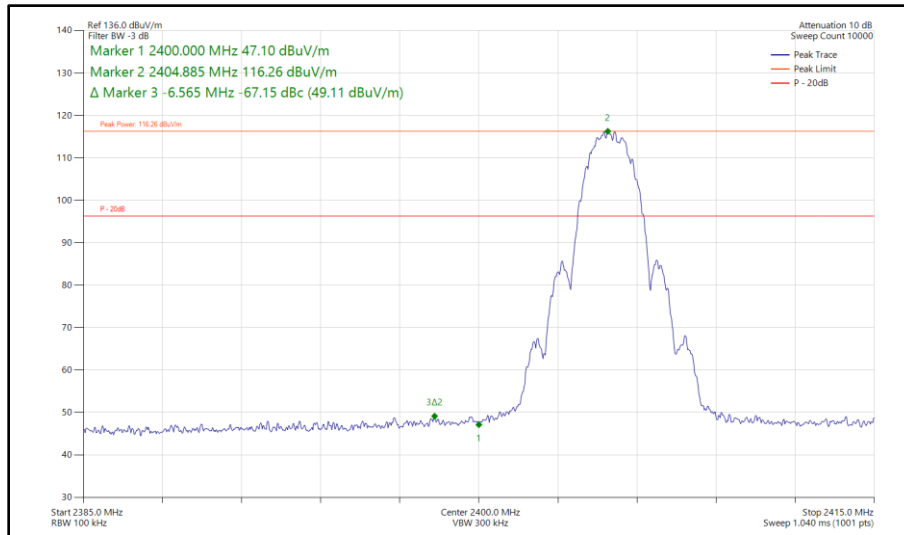

**Figure 45 - Thread, ePA, SISO, Core 1 - 2405 MHz
 Band Edge Frequency 2400 MHz**

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.



2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 and RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	11-Sep-2024
Test Receiver	Rohde & Schwarz	ESW44	5914	12	24-May-2025
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5997	12	14-Sep-2024
Cable (N to N 1m)	Junkosha	MWX221-01000NMSNMS/B	5999	12	20-May-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	20-May-2025
Cable (SMA to SMA 6.5m)	Junkosha	MWX221-06500AMSAMS/B	6014	12	24-Aug-2024
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6018	12	10-Jun-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	05-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	05-May-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	22-Dec-2024
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	18-Dec-2024
Cable (SMA to SMA 8m)	Junkosha	MWX221-08000AMSAMS/B	6319	12	04-Feb-2025
Humidity and Temperature meter	R.S Components	1364	6346	12	06-Mar-2025
Humidity and Temperature Meter	R.S Components	1364	6486	12	04-Jun-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6740	12	01-Feb-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6741	12	01-Feb-2025
6.5m Cable	Junkosha	MWX221-06500AMSAMS/B	6744	12	01-Feb-2025

Table 41

TU - Traceability Unscheduled
O/P Mon - Output Monitored using calibrated equipment



2.5 Spurious Radiated Emissions

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.209 and 15.247 (d)

2.5.2 Equipment Under Test and Modification State

A3186, S/N: GQFXQXKN7J - Modification State 0

2.5.3 Date of Test

02-August-2024 to 05-August-2024

2.5.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

Ports on the EUT were terminated with loads as described in ANSI C63.10 clause 6.2.3.

In the 30 MHz to 1 GHz range pre-scans were only performed on the mid channel (2440 MHz).

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 20 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

To determine the emission characteristic of the EUT above 18 GHz, the test antenna was swept over all faces of the EUT whilst observing a spectral display. The frequency of any emissions of interest was noted for formal measurement at the correct measurement distance of 1m. This procedure was repeated for all relevant transmit operating channels.

Above 18 GHz, the measurement distance was reduced to 1 m. The limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

Where formal measurements have been necessary, the results have been presented in the emissions table.

2.5.5 Example Test Setup Diagram

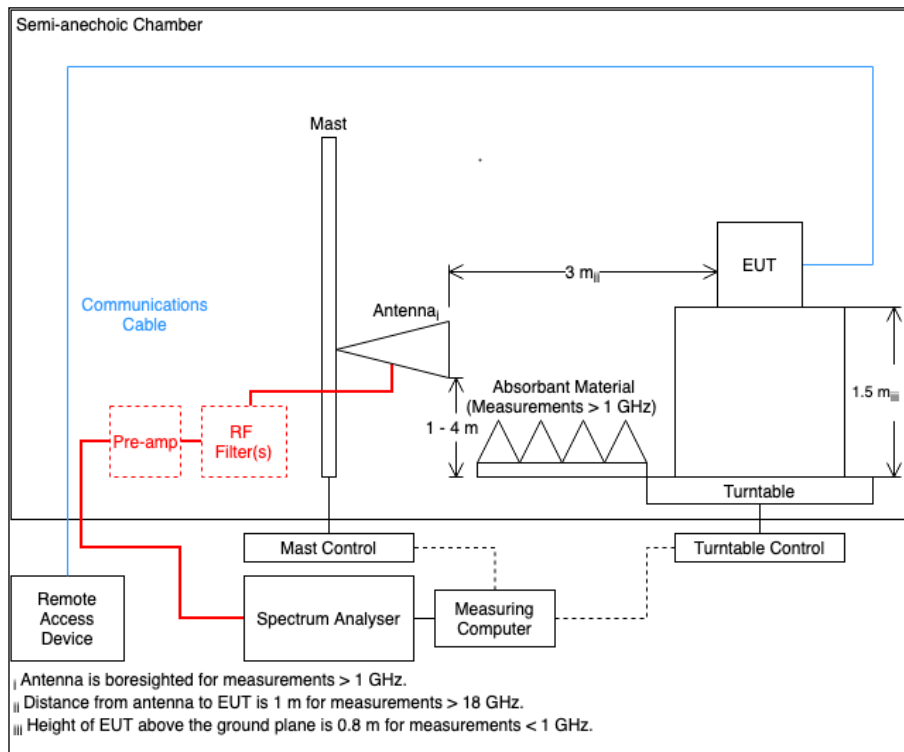


Figure 46

2.5.6 Environmental Conditions

Ambient Temperature 21.8 - 24.1 °C
Relative Humidity 43.7 - 49.2 %



2.5.7 Test Results

Thread

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2369.986	38.49	54.00	-15.51	RMS	23	321	Vertical
2483.665	34.02	54.00	-19.98	RMS	28	390	Vertical

Table 42 - 2405 MHz (CH11), Thread, ePA, Core 0, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

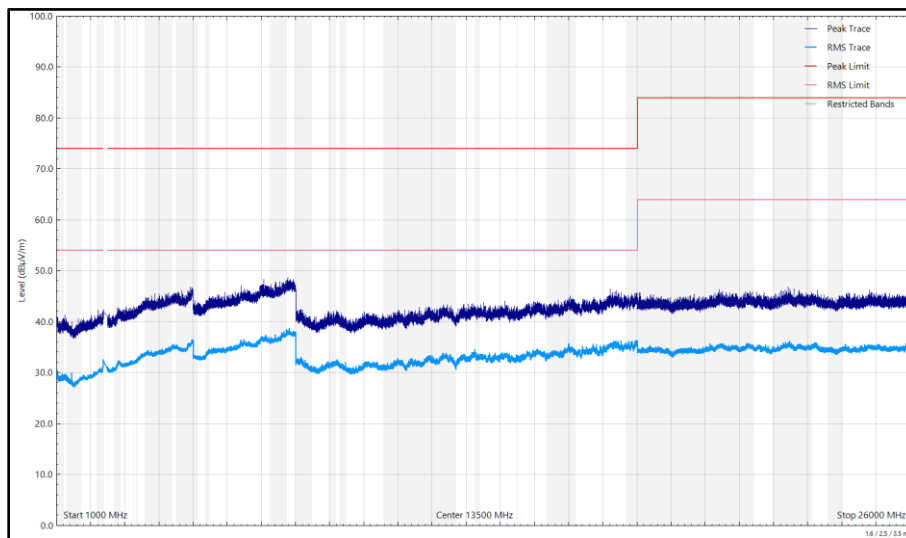


Figure 47 - 2405 MHz (CH11), Thread, ePA, Core 0, 1 GHz to 26 GHz, Horizontal

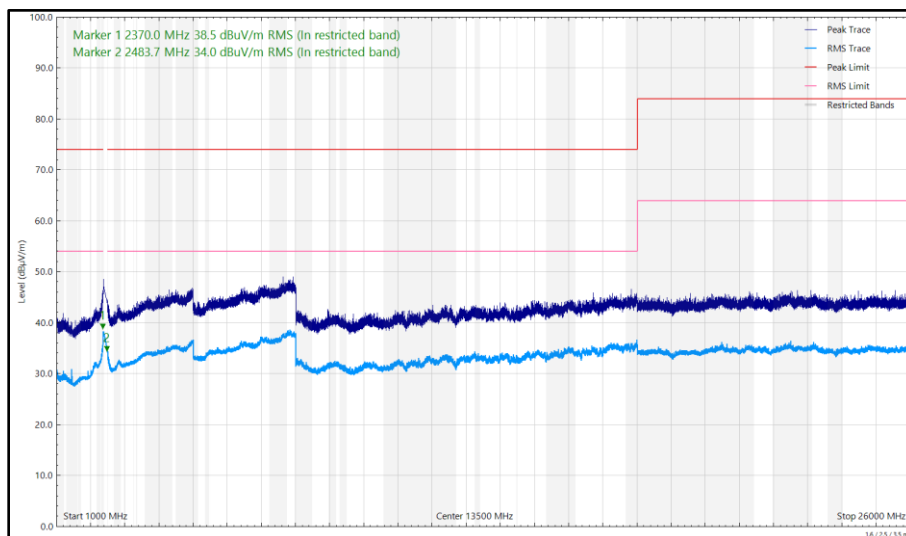


Figure 48 - 2405 MHz (CH11), Thread, ePA, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
169.708	17.51	43.50	-25.99	Q-Peak	151	103	Vertical
171.220	21.44	43.50	-22.06	Q-Peak	355	168	Horizontal
2389.774	37.16	54.00	-16.84	RMS	22	325	Vertical
2483.714	38.02	54.00	-15.98	RMS	345	284	Vertical

Table 43 - 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

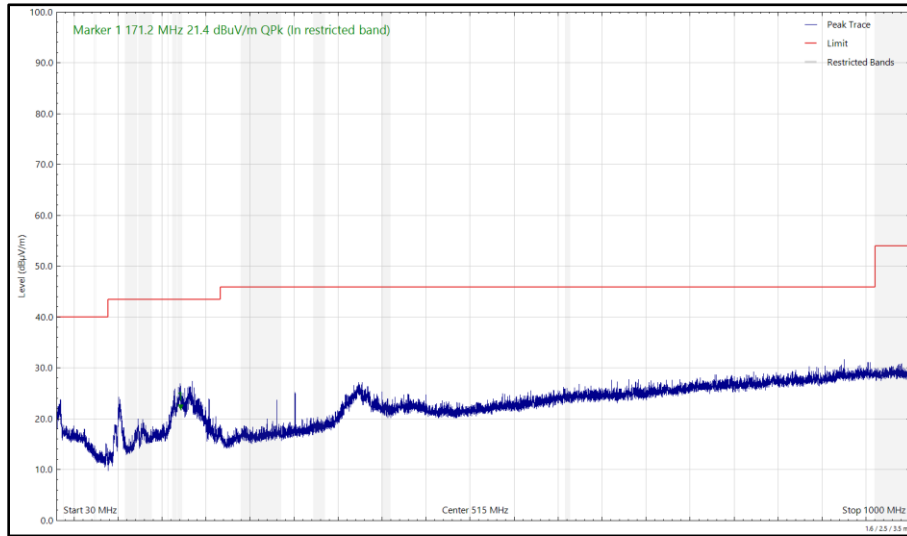


Figure 49 - 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

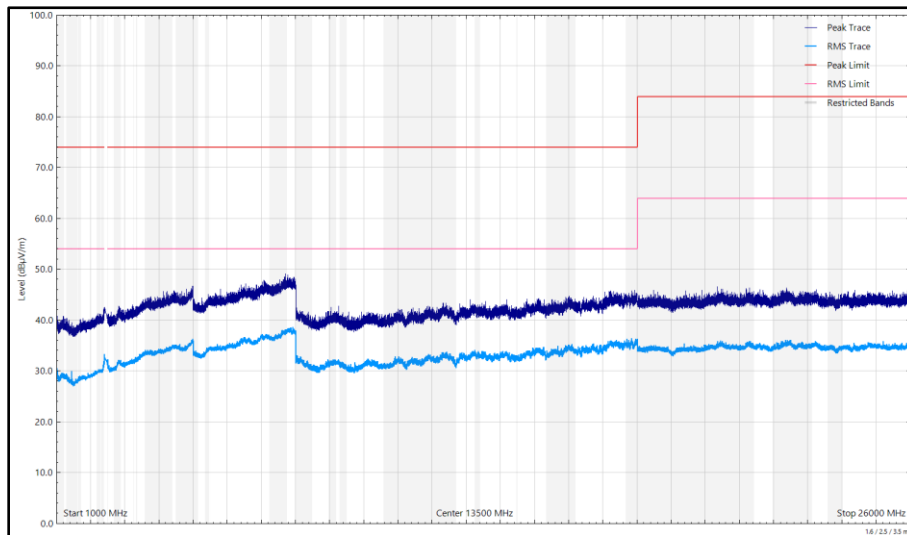


Figure 50 - 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 26 GHz, Horizontal

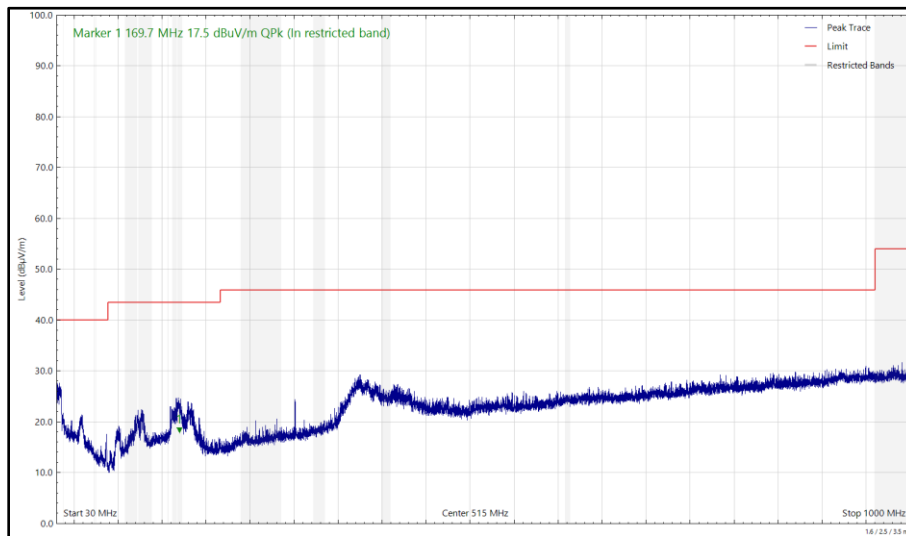


Figure 51 - 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

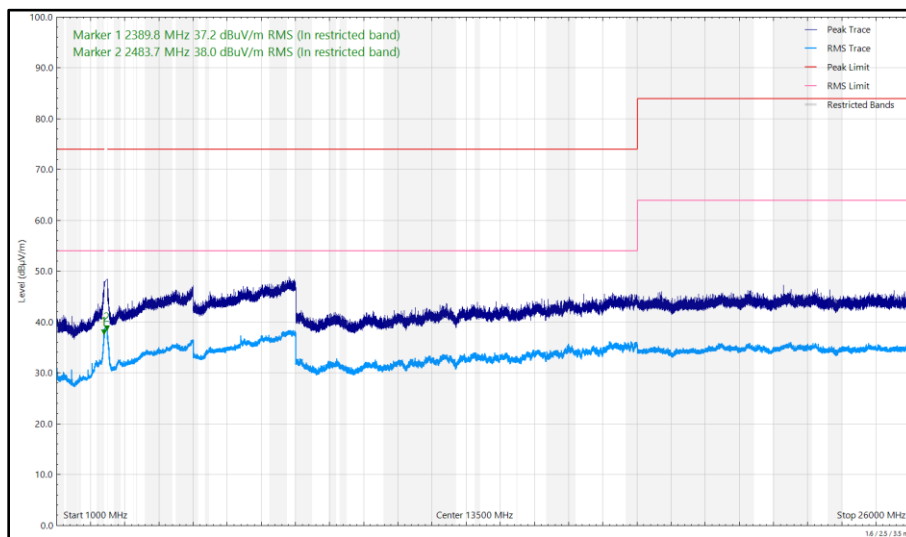


Figure 52 - 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.884	34.79	54.00	-19.21	RMS	19	398	Vertical
2498.607	42.29	54.00	-11.71	RMS	349	332	Vertical
2498.611	34.91	54.00	-19.09	RMS	46	390	Horizontal
4219.966	33.20	54.00	-20.80	RMS	10	178	Vertical

Table 44 - 2475 MHz (CH25), Thread, ePA, Core 0, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

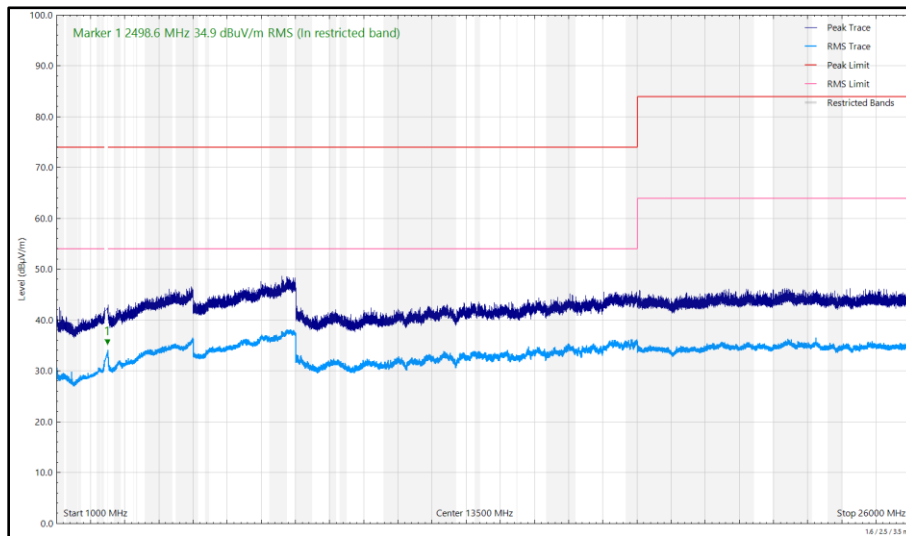


Figure 53 - 2475 MHz (CH25), Thread, ePA, Core 0, 1 GHz to 26 GHz, Horizontal

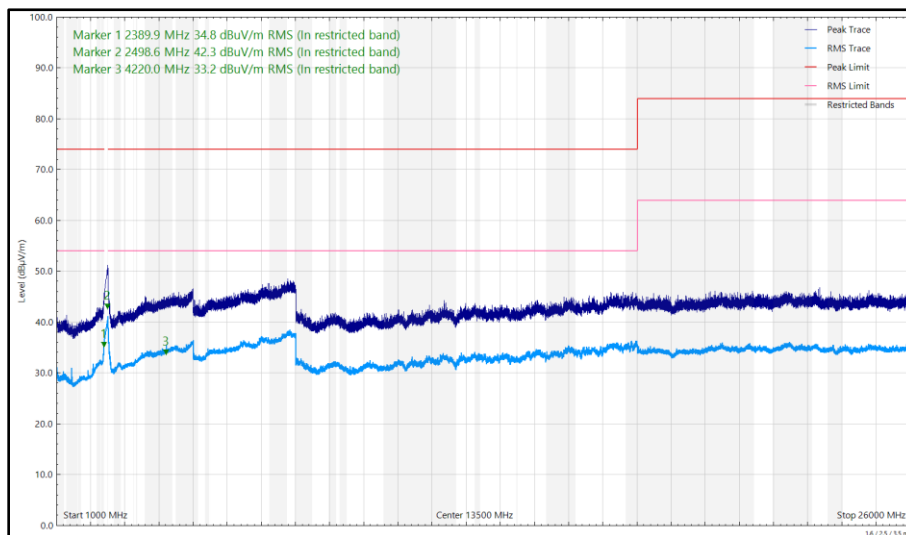


Figure 54 - 2475 MHz (CH25), Thread, ePA, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2369.833	34.92	54.00	-19.08	RMS	64	377	Horizontal
2369.855	38.93	54.00	-15.07	RMS	5	372	Vertical
2484.270	34.25	54.00	-19.75	RMS	44	257	Vertical

Table 45 - 2405 MHz (CH11), Thread, ePA, Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

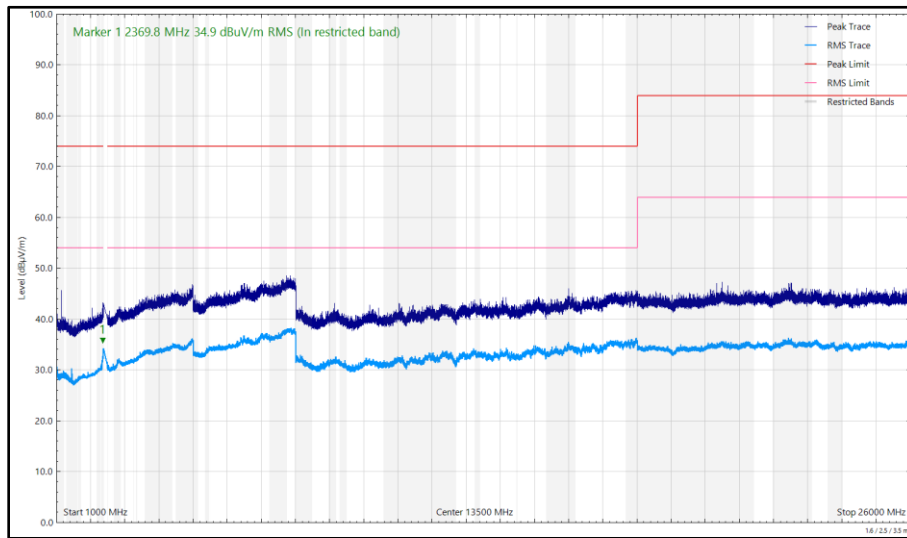


Figure 55 - 2405 MHz (CH11), Thread, ePA, Core 1, 1 GHz to 26 GHz, Horizontal

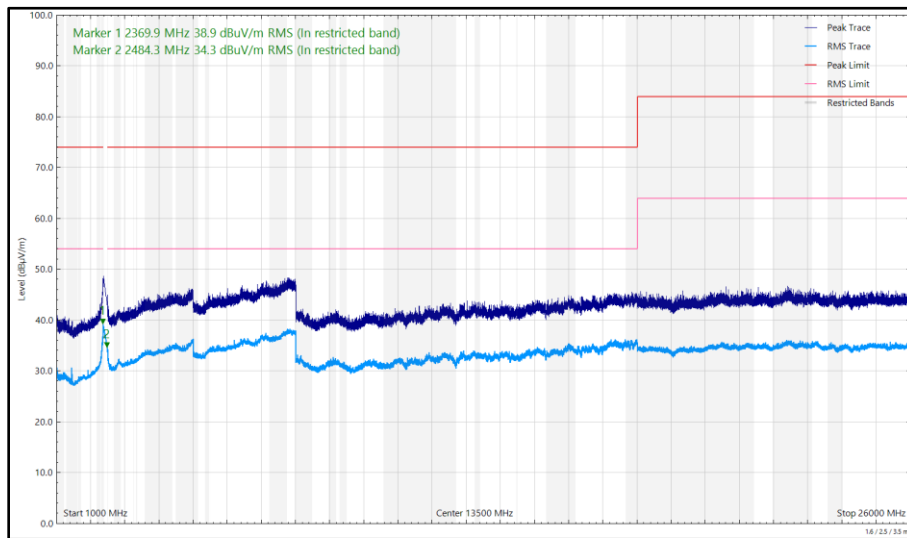


Figure 56 - 2405 MHz (CH11), Thread, ePA, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
168.913	18.41	43.50	-25.09	Q-Peak	170	100	Vertical
171.010	20.80	43.50	-22.70	Q-Peak	359	136	Horizontal
400.879	21.74	46.00	-24.26	Q-Peak	245	100	Vertical
2389.992	38.15	54.00	-15.85	RMS	5	374	Vertical
2483.665	37.94	54.00	-16.06	RMS	20	337	Vertical
4220.116	33.08	54.00	-20.92	RMS	290	161	Vertical

Table 46 - 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

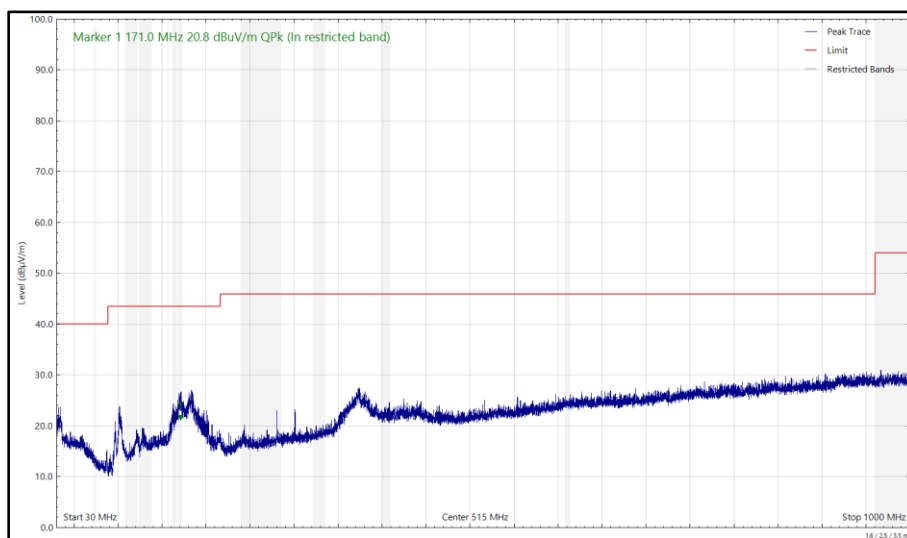


Figure 57 - 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

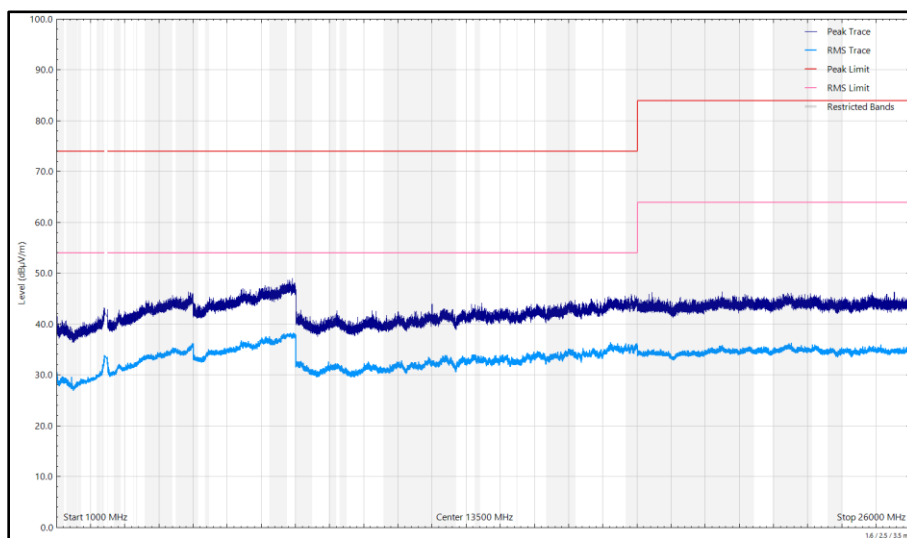


Figure 58 - 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 26 GHz, Horizontal

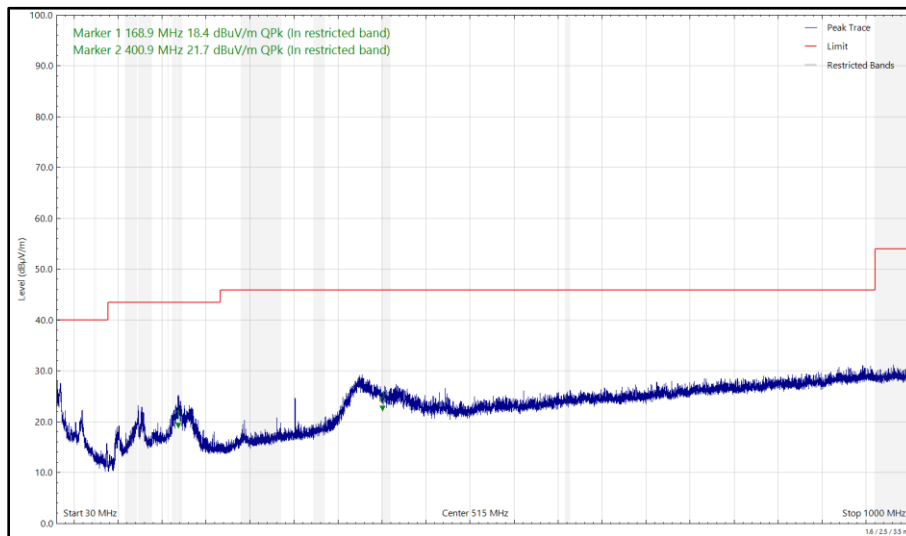


Figure 59 - 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

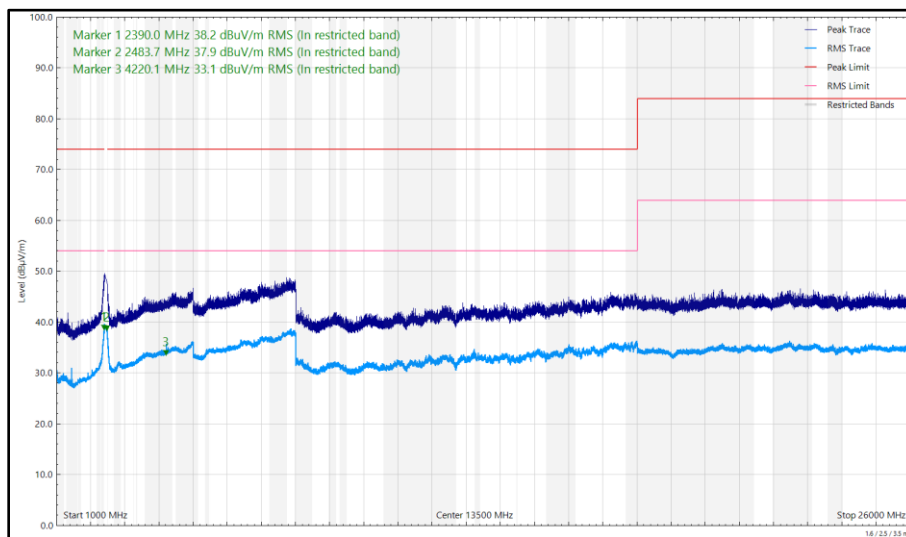


Figure 60 - 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.629	35.79	54.00	-18.21	RMS	0	373	Vertical
2498.650	36.91	54.00	-17.09	RMS	59	390	Horizontal
2498.738	42.37	54.00	-11.63	RMS	32	291	Vertical

Table 47 - 2475 MHz (CH25), Thread, ePA, Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

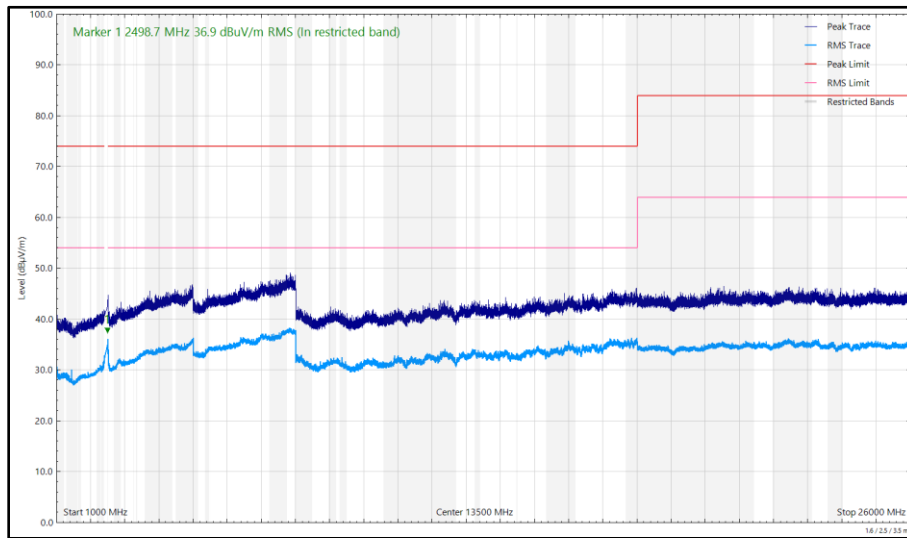


Figure 61 - 2475 MHz (CH25), Thread, ePA, Core 1, 1 GHz to 26 GHz, Horizontal

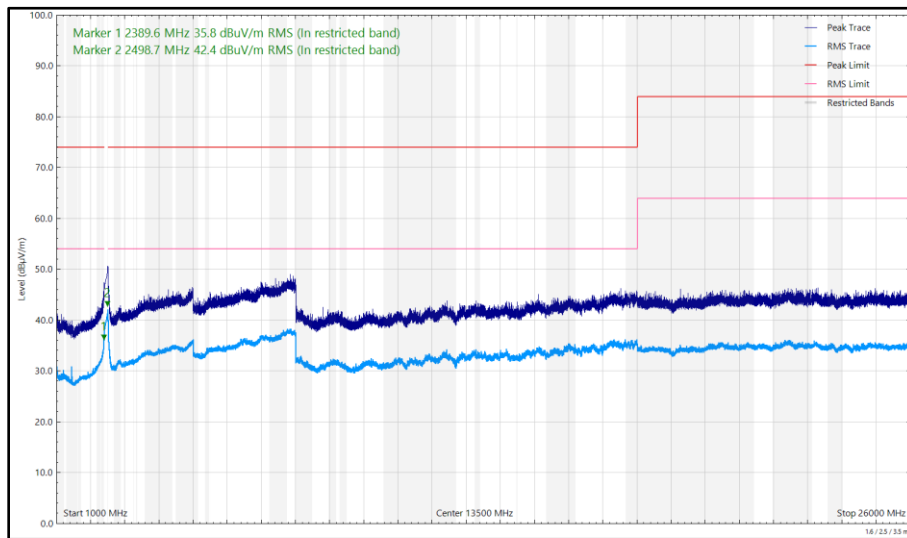


Figure 62 - 2475 MHz (CH25), Thread, ePA, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 48 - 2405 MHz (CH11), Thread, iPA, Core 0, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

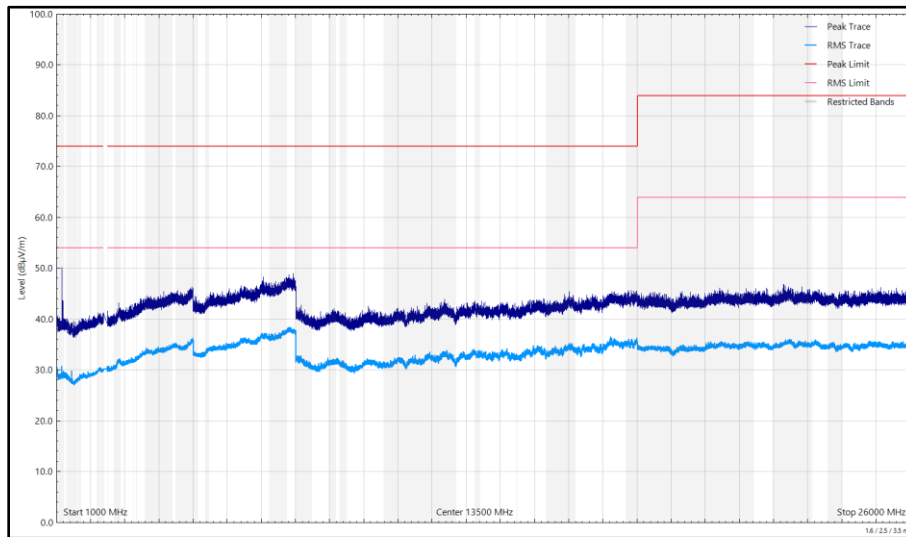


Figure 63 - 2405 MHz (CH11), Thread, iPA, Core 0, 1 GHz to 26 GHz, Horizontal

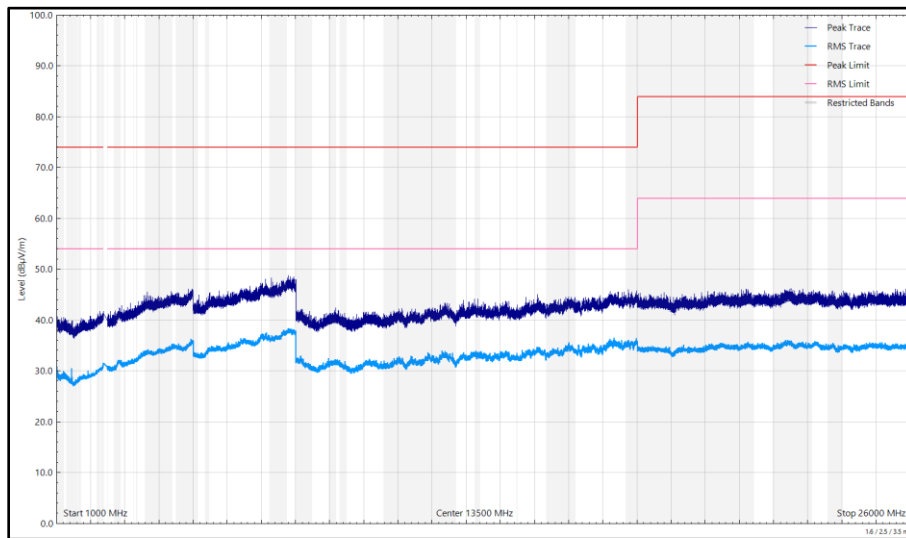


Figure 64 - 2405 MHz (CH11), Thread, iPA, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
169.889	18.55	43.50	-24.95	Q-Peak	360	100	Vertical
170.284	18.87	43.50	-24.63	Q-Peak	4	281	Horizontal

Table 49 - 2440 MHz (CH18), Thread, iPA, Core 0, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

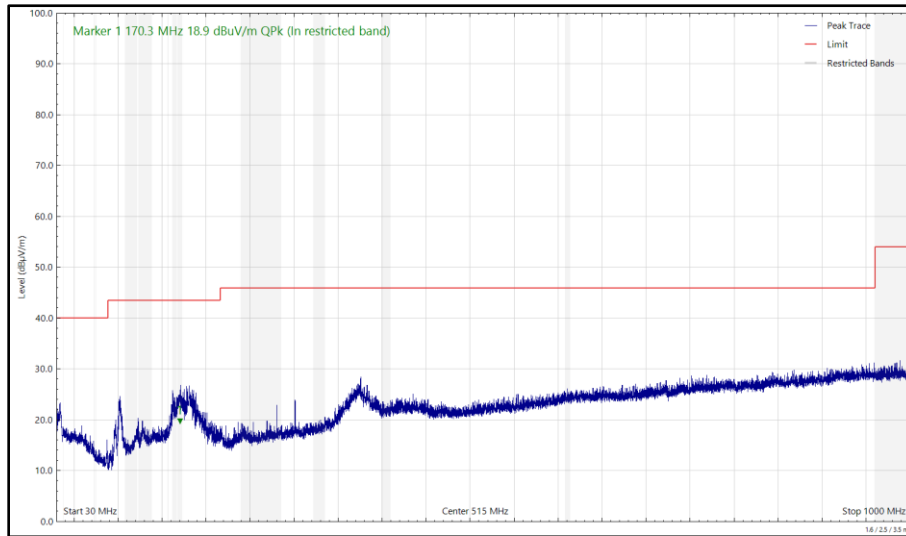


Figure 65 - 2440 MHz (CH18), Thread, iPA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

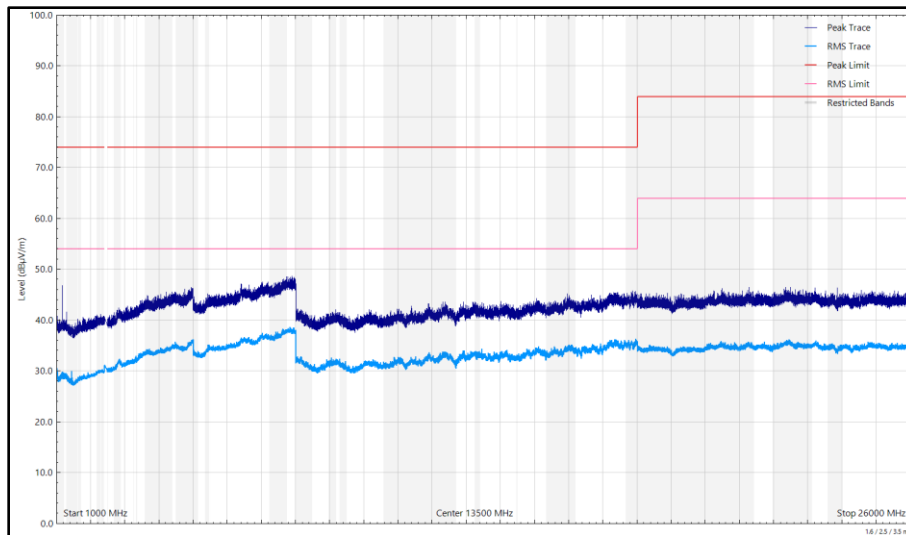


Figure 66 - 2440 MHz (CH18), Thread, iPA, Core 0, 1 GHz to 26 GHz, Horizontal