

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
124.769	27.05	43.50	-16.45	Q-Peak	333	272	Horizontal
125.076	34.94	43.50	-8.56	Q-Peak	97	100	Vertical
166.492	29.16	43.50	-14.34	Q-Peak	360	240	Horizontal
2389.805	39.11	54.00	-14.89	RMS	2	397	Vertical
2399.549	57.07	74.00	-16.93	Peak	4	292	Vertical
2483.501	58.67	74.00	-15.33	Peak	336	311	Vertical
2483.641	42.32	54.00	-11.68	RMS	6	400	Vertical

Table 70 - 2442 MHz (CH7), 802.11g, Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

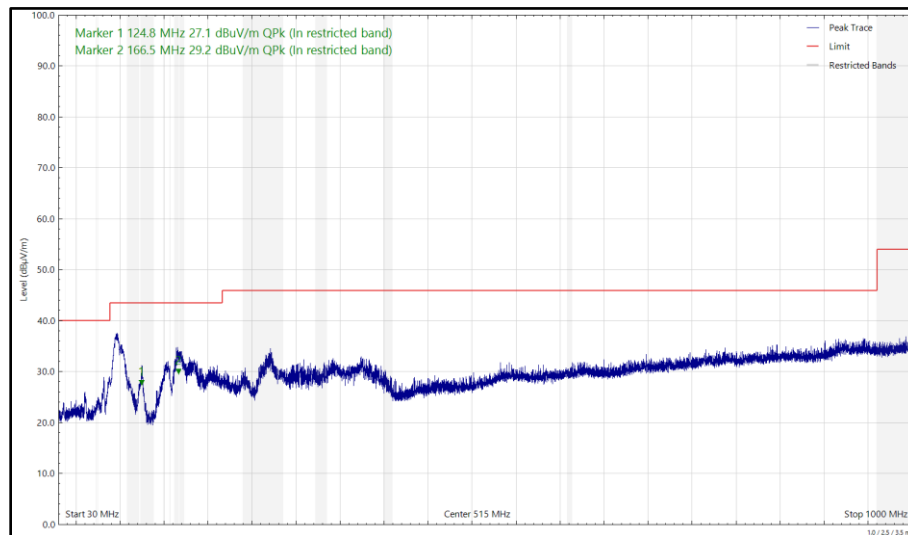


Figure 200 - 2442 MHz (CH7), 802.11g, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

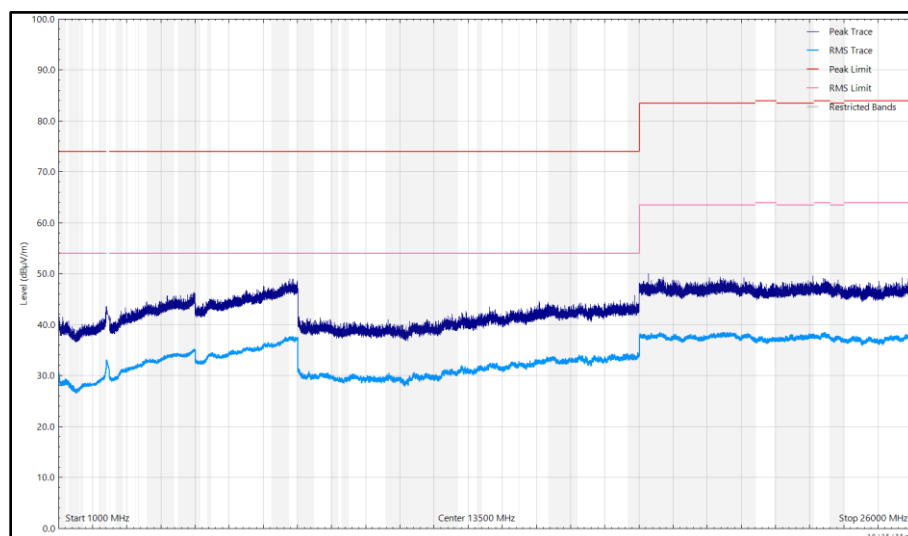


Figure 201 - 2442 MHz (CH7), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal

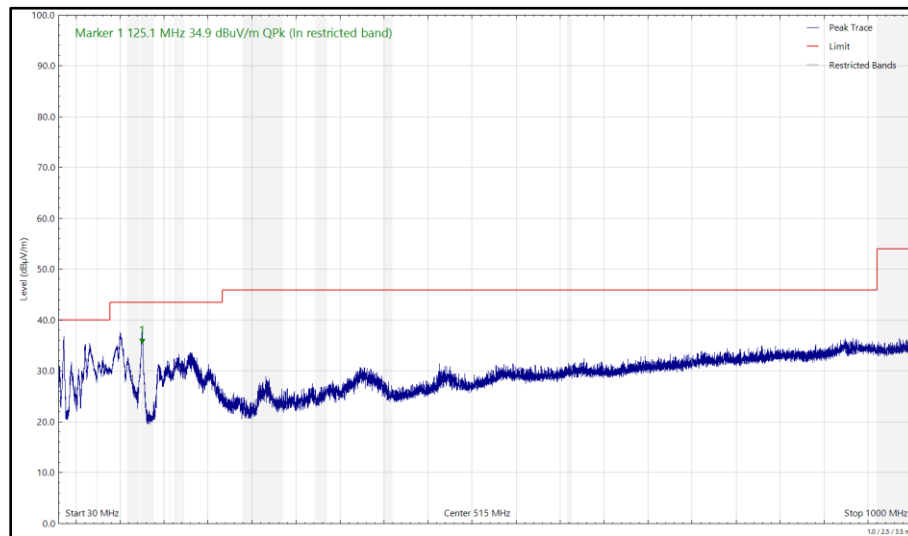


Figure 202 - 2442 MHz (CH7), 802.11g, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

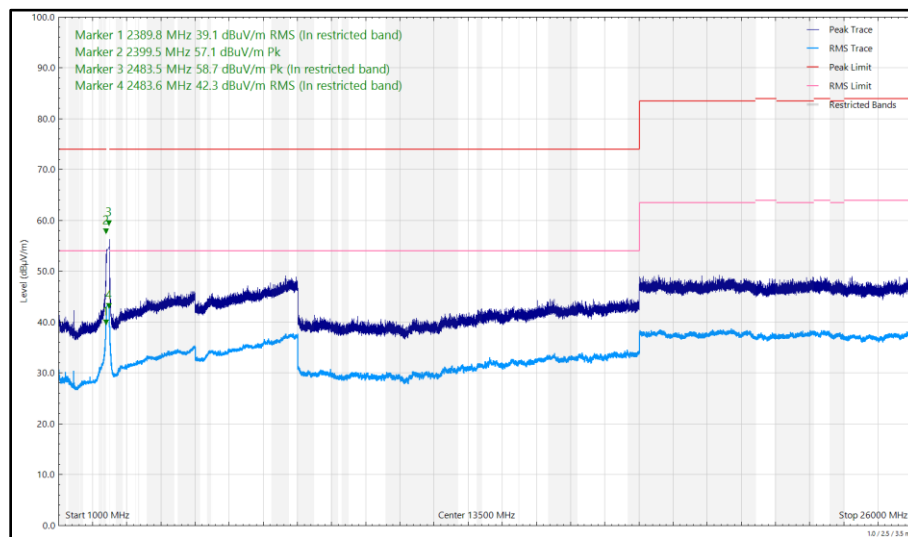


Figure 203 - 2442 MHz (CH7), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2508.551	34.21	54.00	-19.79	RMS	302	108	Horizontal
2508.551	34.46	54.00	-19.54	RMS	303	227	Vertical

Table 71 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

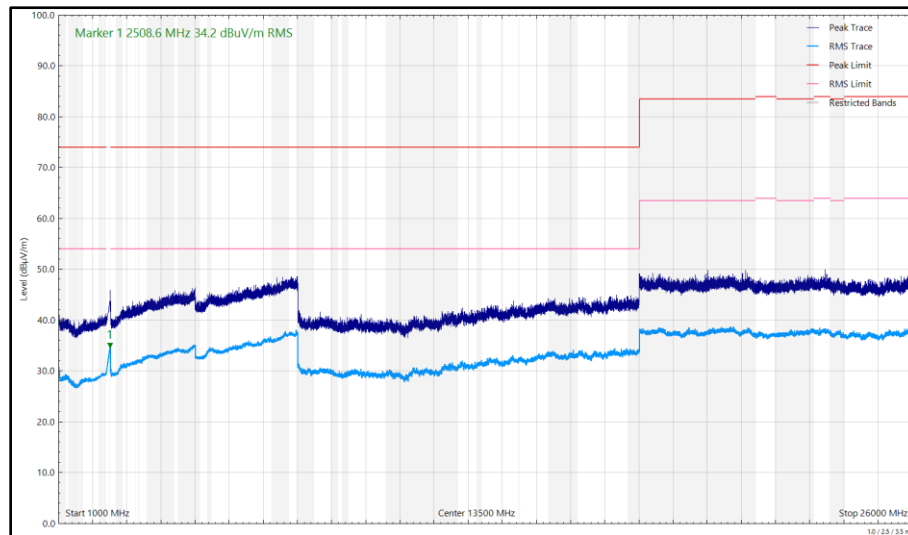


Figure 204 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal

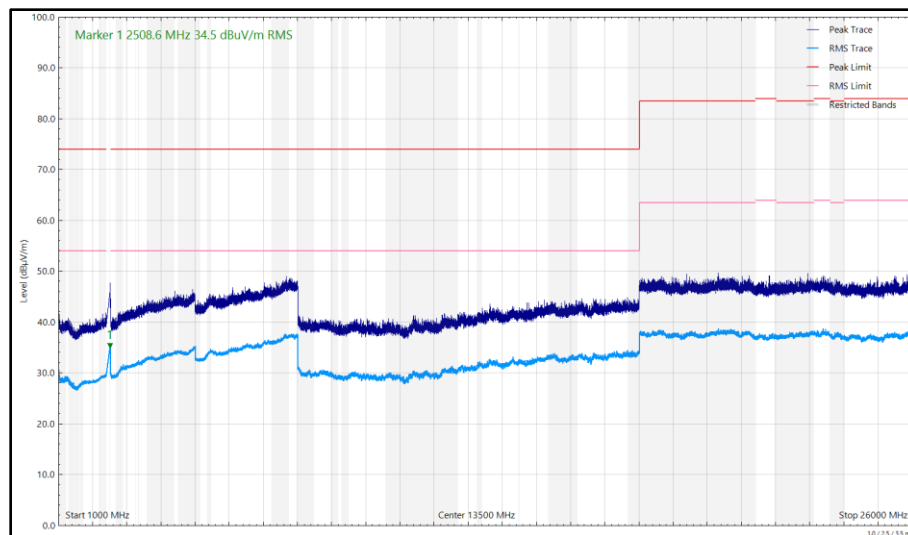


Figure 205 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 72 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

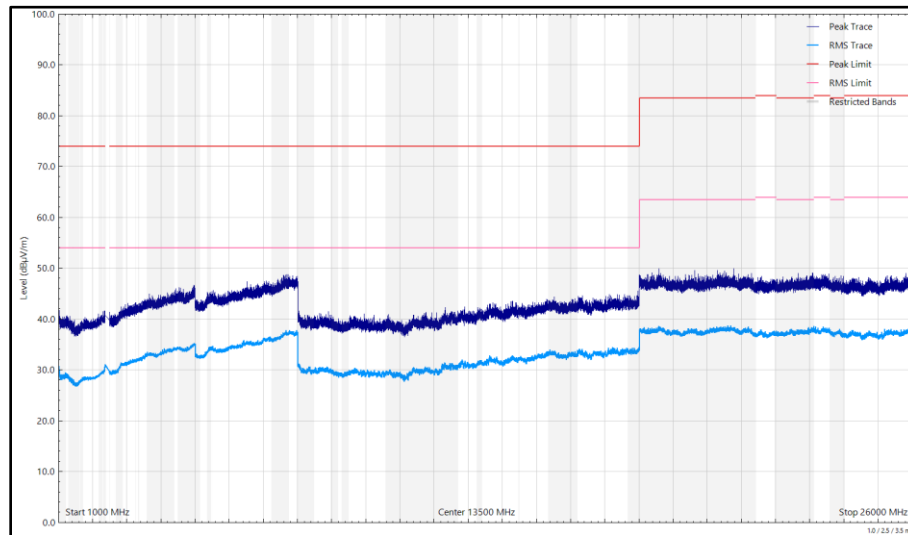


Figure 206 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

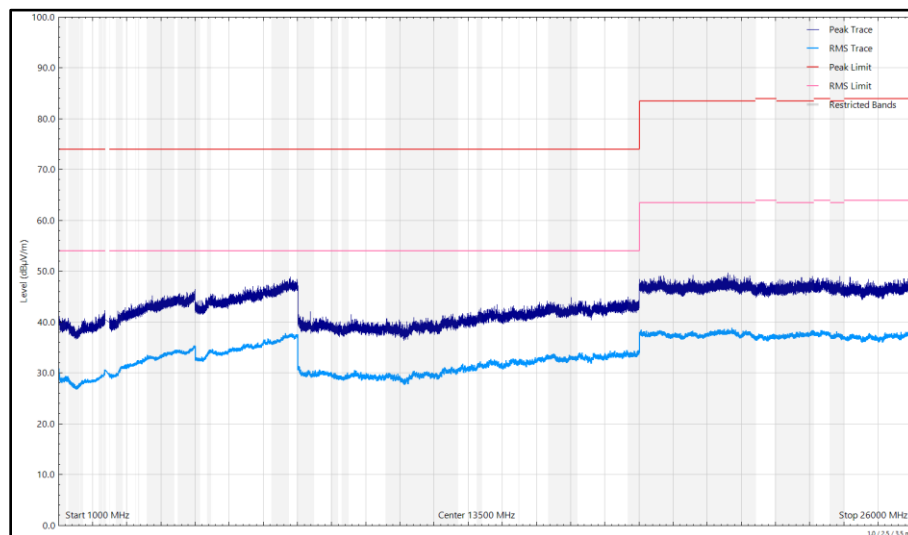


Figure 207 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
75.194	27.87	40.00	-12.13	Q-Peak	278	203	Vertical
124.595	35.17	43.50	-8.33	Q-Peak	97	100	Vertical
167.081	29.09	43.50	-14.41	Q-Peak	360	249	Horizontal
268.091	29.21	46.00	-16.79	Q-Peak	174	121	Horizontal

Table 73 - 2442 MHz (CH7), HT20, CDD, Core 0 + Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

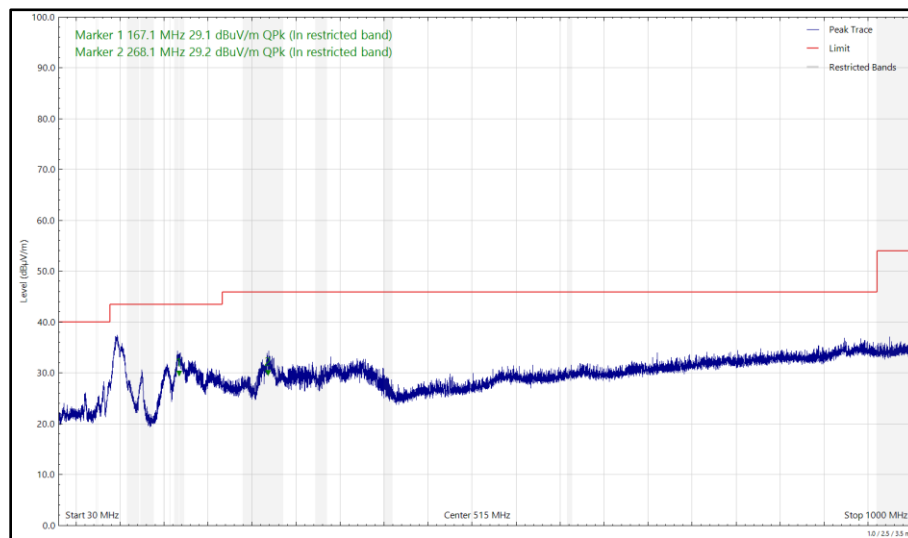


Figure 208 - 2442 MHz (CH7), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

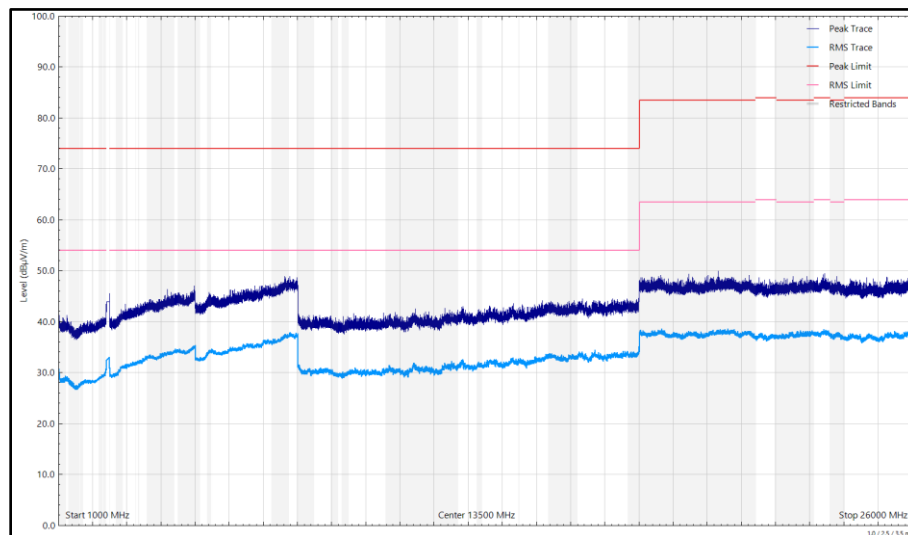


Figure 209 - 2442 MHz (CH7), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

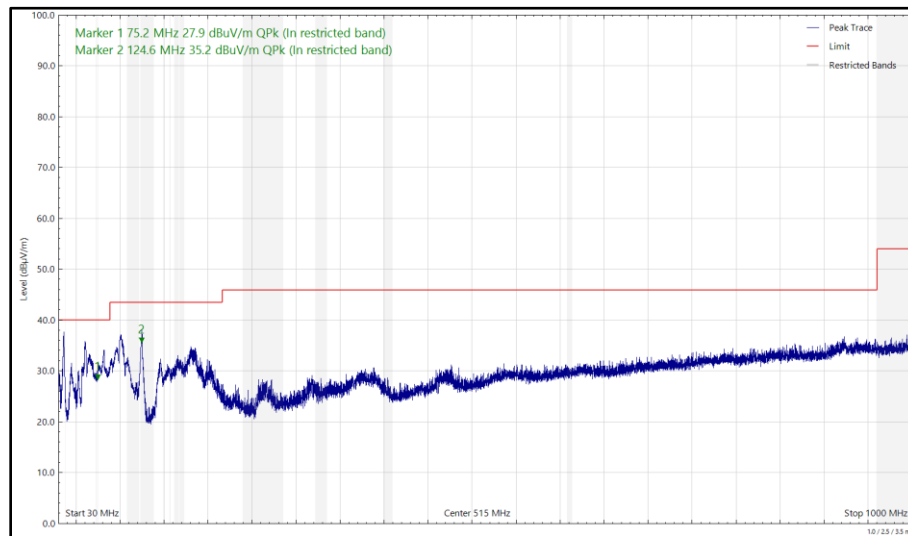


Figure 210 - 2442 MHz (CH7), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

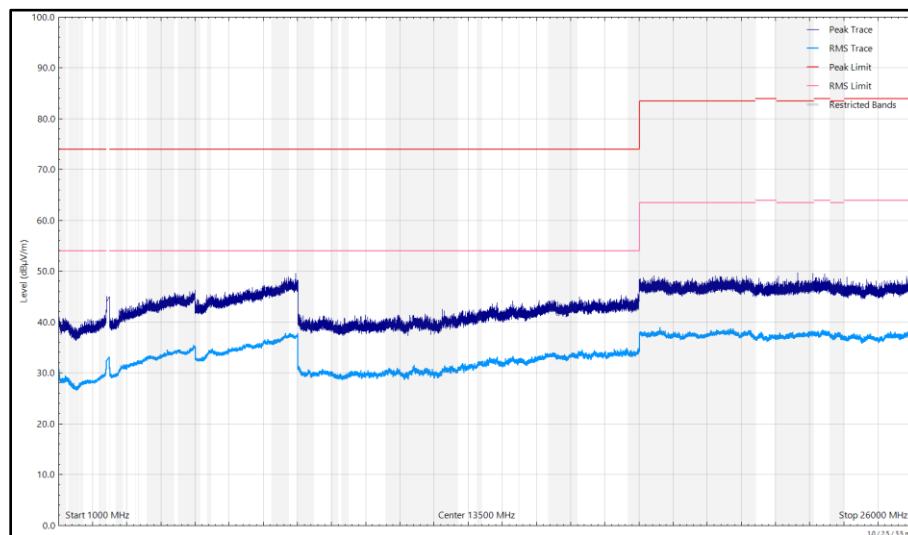


Figure 211 - 2442 MHz (CH7), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2509.289	38.36	54.00	-15.64	RMS	312	390	Vertical
2509.377	37.36	54.00	-16.64	RMS	304	102	Horizontal

Table 74 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

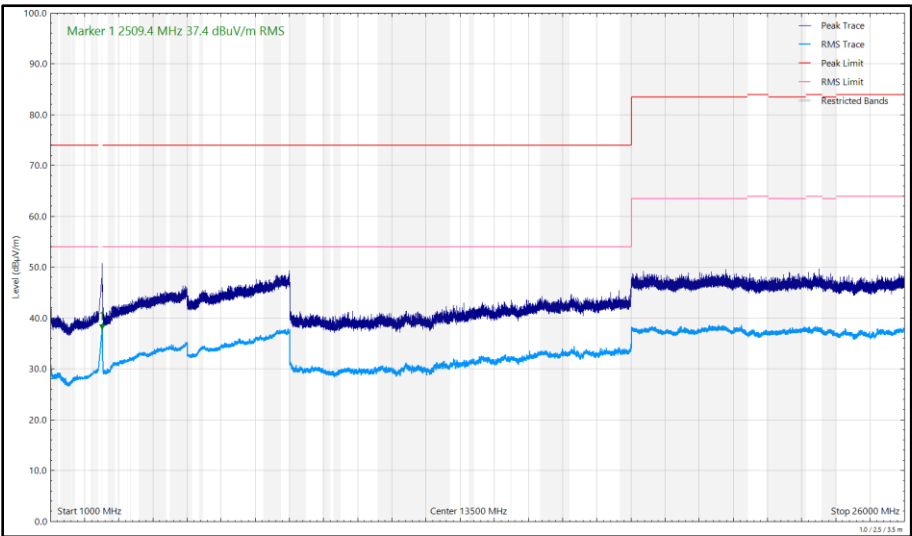


Figure 212 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

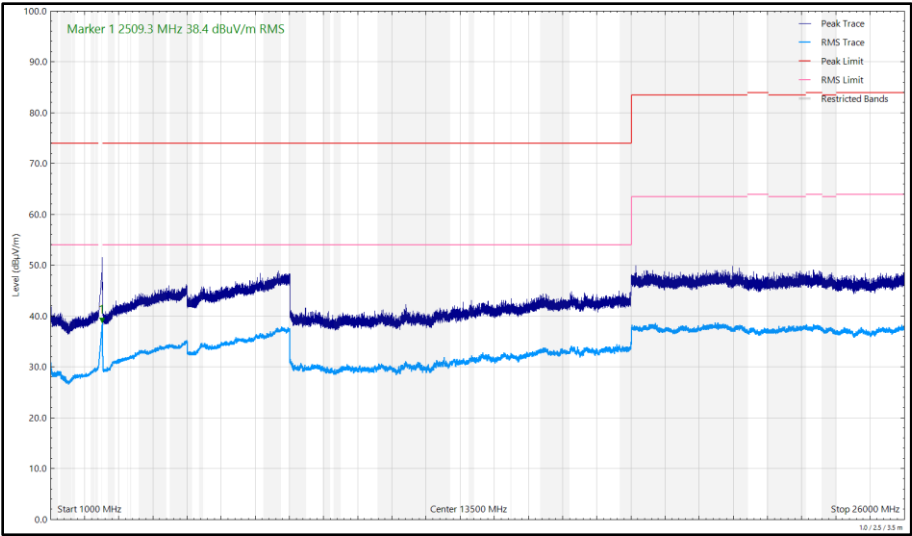


Figure 213 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 75 - 2412 MHz (CH1), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

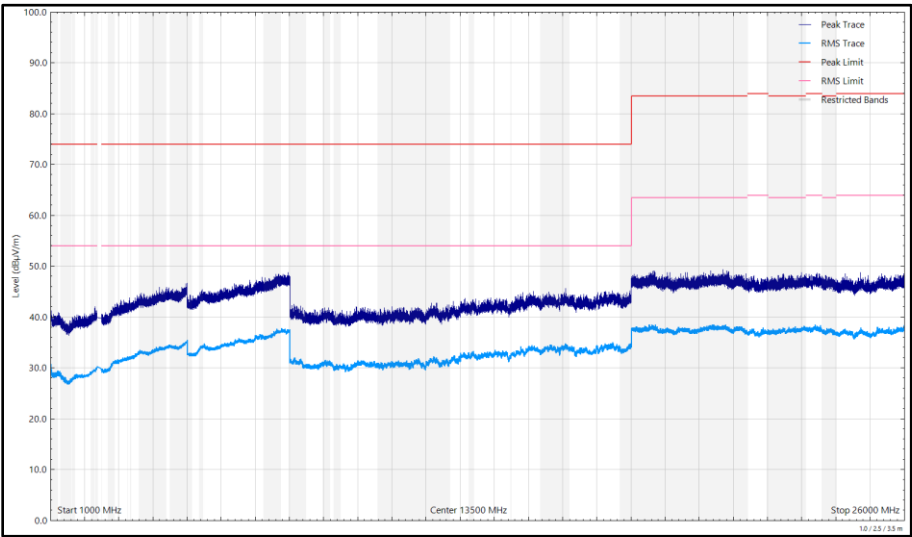


Figure 214 - 2412 MHz (CH1), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

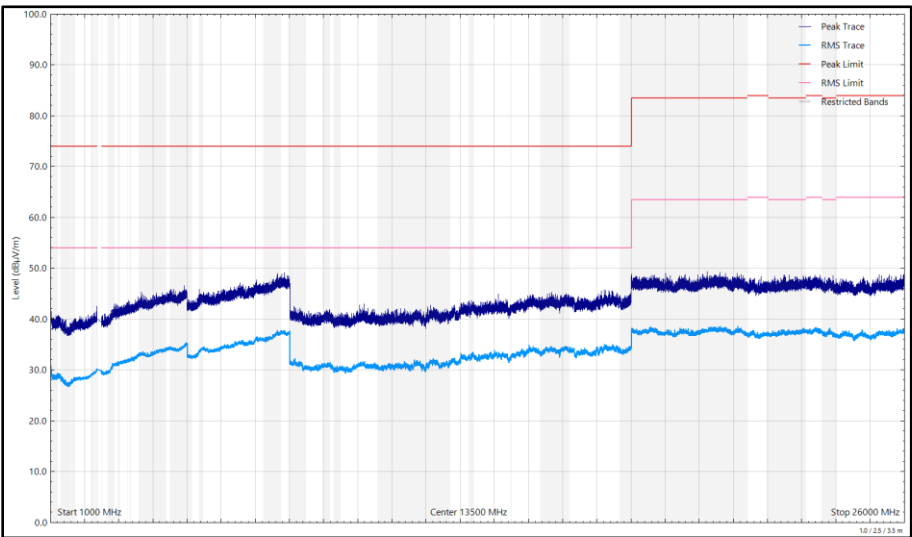


Figure 215 - 2412 MHz (CH1), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
123.903	26.75	43.50	-16.75	Q-Peak	239	251	Horizontal
124.292	33.79	43.50	-9.71	Q-Peak	95	100	Vertical
166.558	28.28	43.50	-15.22	Q-Peak	357	251	Horizontal

Table 76 - 2442 MHz (CH7), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

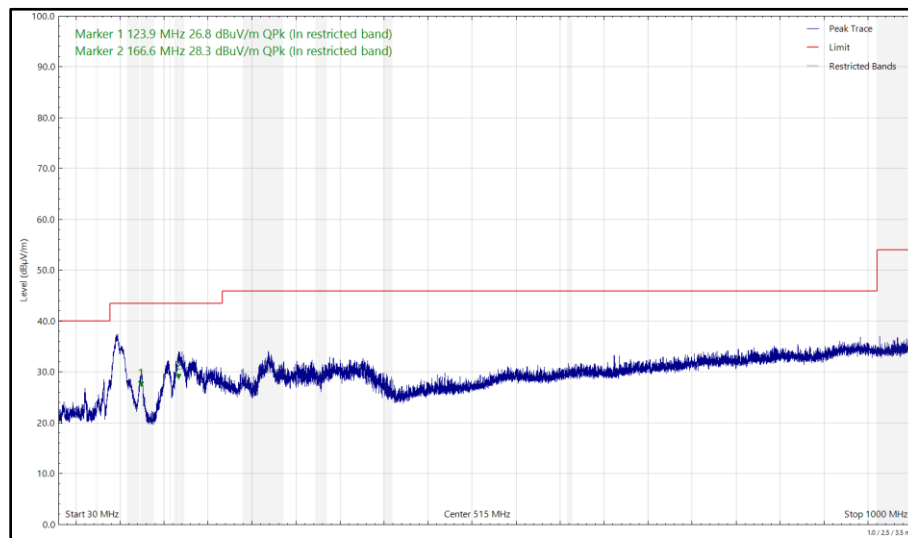


Figure 216 - 2442 MHz (CH7), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

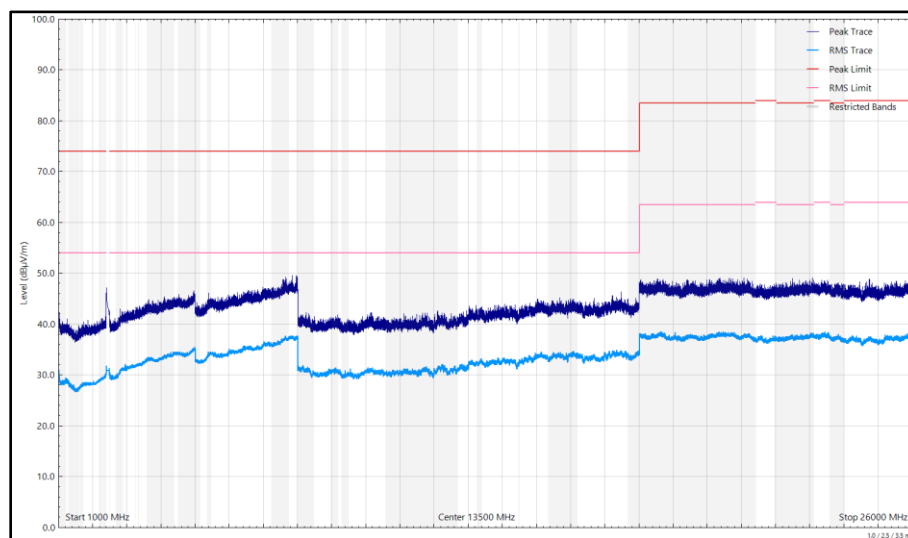


Figure 217 - 2442 MHz (CH7), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

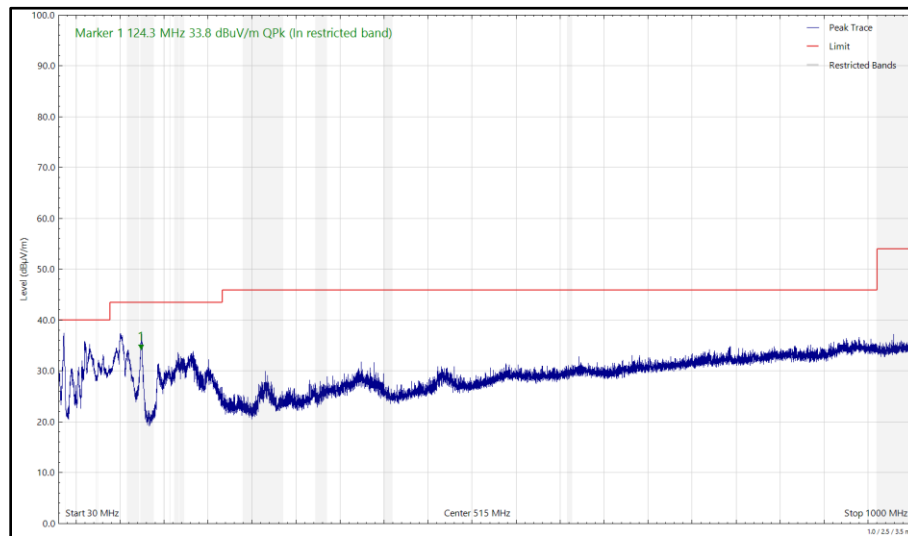


Figure 218 - 2442 MHz (CH7), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

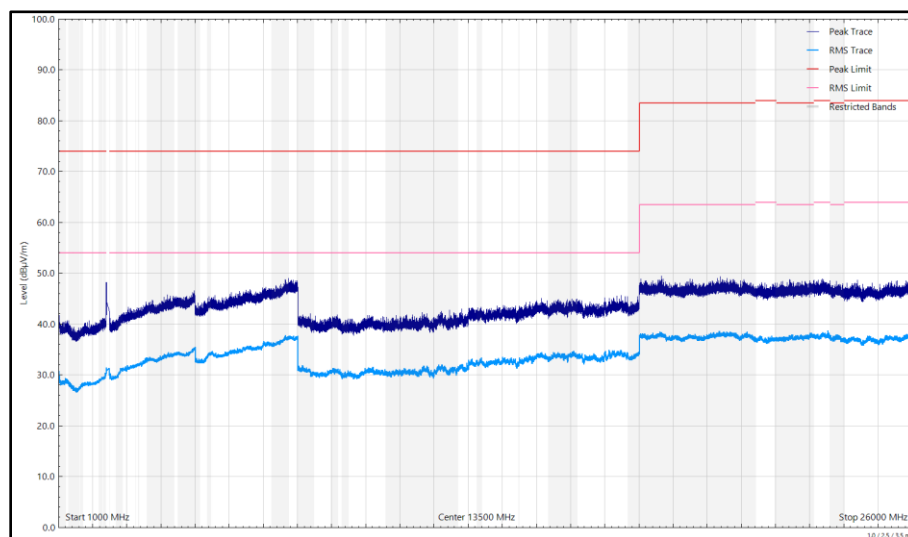


Figure 219 - 2442 MHz (CH7), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 77 - 2472 MHz (CH13), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

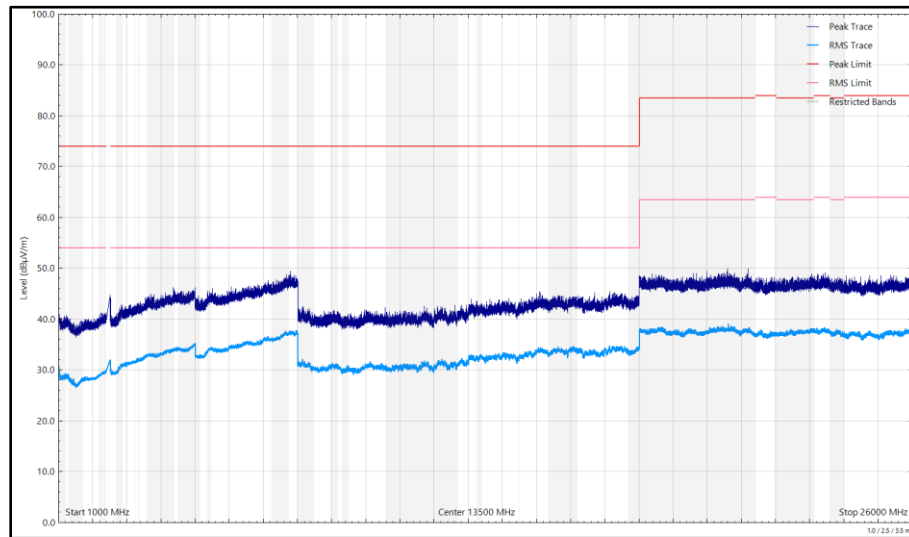


Figure 220 - 2472 MHz (CH13), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

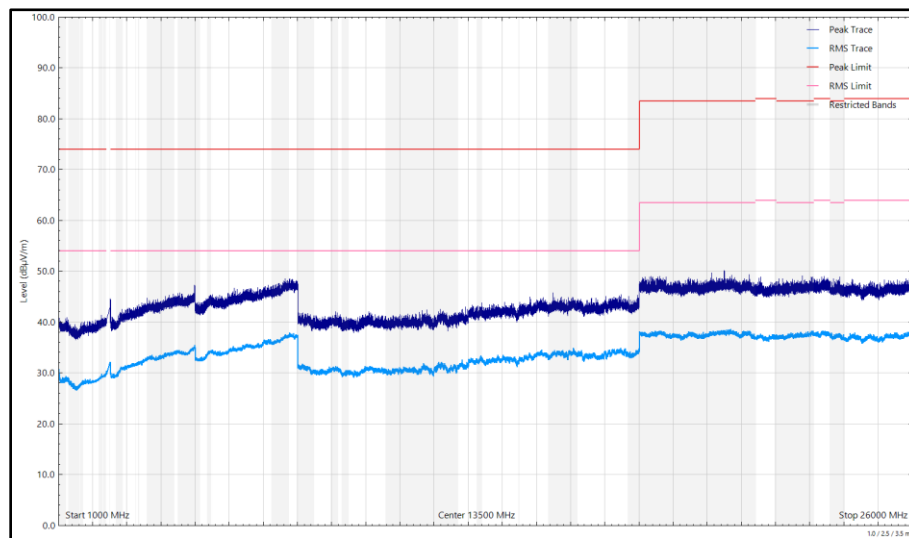


Figure 221 - 2472 MHz (CH13), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-GEN, clause 8.10, must also comply with the radiated emission limits specified in RSS-GEN clause 8.9.



2.5.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 and RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Antenna (DRG, 1 GHz to 10.5 GHz)	Schwarzbeck	BBHA9120B	5215	12	14-Jul-2025
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5940	12	05-May-2025
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5943	24	24-May-2026
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (N to N 8m)	Junkosha	MWX221-0800NMSNMS/A	6006	12	20-May-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	20-May-2025
Cable (N to N 3m)	Junkosha	MWX221-03000NMSNMS/A	6025	12	20-May-2025
Horn Antenna (1-10.5 GHz)	Schwarzbeck	BBHA9120B	6140	12	05-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	05-May-2025
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6188	24	31-Jul-2026
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	22-Dec-2024
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	18-Dec-2024
8GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6195	12	23-Apr-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6198	12	03-Jun-2025
Attenuator 4dB	Pasternack	PE7074-4	6201	24	24-May-2026



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6214	12	23-Apr-2025
USB Spectrum Analyser	Signal Hound	SA124B	6296	-	TU
USB Spectrum Analyser	Signal Hound	SA124B	6297	-	TU
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	6323	12	04-Feb-2025
EMC Test Receiver	Rohde & Schwarz	ESW44	6333	12	16-Feb-2025
Humidity and Temperature Meter	R.S Components	1364	6346	12	06-Mar-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6740	12	01-Feb-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6741	12	01-Feb-2025
6.5m Cable	Junkosha	MWX221-06500AMSAMS/B	6744	12	01-Feb-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	6805	12	29-May-2025
1M SMA Cable	Junkosha	MWX221-01000AMSAMS/B	6832	12	14-Aug-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6834	12	14-Aug-2025
Handheld Hygrometer	Fluke	971	6838	12	27-Aug-2025
Cable Assembly	SpecTech	PE300-60	6856	-	TU
Cable Assembly	SpecTech	PE300-60	6866	-	TU
Cable Assembly	SpecTech	PE300-60	6867	-	TU
Cable Assembly	SpecTech	PE300-60	6868	-	TU

Table 78

TU - Traceability Unscheduled
O/P Mon - Output Monitored using calibrated equipment



2.6 Power Spectral Density

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 6.12

2.6.2 Equipment Under Test and Modification State

A3241, S/N: FWKQMY7GHY - Modification State 0

2.6.3 Date of Test

31-October-2024

2.6.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.5.

Where the EUT duty cycle was $< 98\%$ and repeatable within 2% , the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method AVGPS-2).

MIMO output port summing was performed in accordance with KDB 662911 D01 E)2)b)

2.6.5 Environmental Conditions

Ambient Temperature	21.0 °C
Relative Humidity	50.2 %



2.6.6 Test Results

2.4 GHz WLAN

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11b	Duty Cycle (%):	99.4
Data Rate:	1 Mbps	DCCF (dB):	0.03
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	1.98	-	-	-	1.98	8.00	-6.02
2442	100.0	1.76	-	-	-	1.76	8.00	-6.24
2472	100.0	-2.01	-	-	-	-2.01	8.00	-10.01

Table 79 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11g	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-2.09	-	-	-	-2.09	8.00	-10.09
2442	100.0	4.79	-	-	-	4.79	8.00	-3.21
2472	100.0	-12.91	-	-	-	-12.91	8.00	-20.91

Table 80 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-3.57	-	-	-	-3.57	8.00	-11.57
2442	100.0	4.83	-	-	-	4.83	8.00	-3.17
2472	100.0	-12.37	-	-	-	-12.37	8.00	-20.37

Table 81 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-5.63	-	-	-	-5.63	8.00	-13.63
2442	100.0	3.05	-	-	-	3.05	8.00	-4.95
2472	100.0	-15.29	-	-	-	-15.29	8.00	-23.29

Table 82 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	2.04	-	-	-	2.04	8.00	-5.96
2442	100.0	1.89	-	-	-	1.89	8.00	-6.11
2472	100.0	-18.04	-	-	-	-18.04	8.00	-26.04

Table 83 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	2.50	-	-	-	2.50	8.00	-5.50
2442	100.0	2.13	-	-	-	2.13	8.00	-5.87
2472	100.0	-17.92	-	-	-	-17.92	8.00	-25.92

Table 84 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-0.70	-	-	-	-0.70	8.00	-8.70
2442	100.0	2.03	-	-	-	2.03	8.00	-5.97
2472	100.0	-19.33	-	-	-	-19.33	8.00	-27.33

Table 85 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.26
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-4.50	-4.37	-	-	-1.42	5.74	-7.16
2442	51.0	1.84	1.83	-	-	4.85	5.74	-0.89
2472	100.0	-15.20	-15.40	-	-	-12.29	5.74	-18.03

Table 86 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-4.50	-4.37	-	-	-1.42	8.00	-9.42
2442	51.0	1.84	1.83	-	-	4.85	8.00	-3.15
2472	100.0	-15.20	-15.40	-	-	-12.29	8.00	-20.29

Table 87 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.26
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-7.43	-7.41	-	-	-4.41	5.74	-10.15
2437	51.0	0.06	-0.12	-	-	2.98	5.74	-2.76
2472	100.0	-18.15	-18.02	-	-	-15.08	5.74	-20.82

Table 88 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-7.43	-7.41	-	-	-4.41	8.00	-12.41
2437	51.0	0.06	-0.12	-	-	2.98	8.00	-5.02
2472	100.0	-18.15	-18.02	-	-	-15.08	8.00	-23.08

Table 89 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.26
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	1.89	2.03	-	-	4.97	5.74	-0.77
2442	51.0	-0.80	-0.94	-	-	2.14	5.74	-3.60
2467	100.0	1.36	1.28	-	-	4.33	5.74	-1.41

Table 90 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	1.89	2.03	-	-	4.97	8.00	-3.03
2442	51.0	-0.80	-0.94	-	-	2.14	8.00	-5.86
2467	100.0	1.36	1.28	-	-	4.33	8.00	-3.67

Table 91 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.26
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	51.0	-0.58	-0.62	-	-	2.41	5.74	-3.33
2442	51.0	-0.61	-1.09	-	-	2.17	5.74	-3.57
2472	100.0	-19.99	-19.69	-	-	-16.83	5.74	-22.57

Table 92 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	51.0	-0.58	-0.62	-	-	2.41	8.00	-5.59
2442	51.0	-0.61	-1.09	-	-	2.17	8.00	-5.83
2472	100.0	-19.99	-19.69	-	-	-16.83	8.00	-24.83

Table 93 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.26
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-1.45	-1.40	-	-	1.58	5.74	-4.16
2442	51.0	-0.56	-0.58	-	-	2.44	5.74	-3.30
2472	100.0	-22.99	-23.12	-	-	-20.05	5.74	-25.79

Table 94 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-1.45	-1.40	-	-	1.58	8.00	-6.42
2442	51.0	-0.56	-0.58	-	-	2.44	8.00	-5.56
2472	100.0	-22.99	-23.12	-	-	-20.05	8.00	-28.05

Table 95 - ISED Maximum Power Spectral Density Results

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

ISED RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 2.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
True RMS Multimeter	Fluke	79 Series III	411	12	12-Jan-2025
Hygrometer	Rotronic	Hygropalm 0	3028	12	12-Aug-2025
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5528	24	18-Sep-2025
USB Power Sensor	Boonton	RTP5008	5833	12	26-Jul-2025
USB Power Sensor	Boonton	RTP5008	5834	12	26-Jul-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6350	12	02-Aug-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6638	12	02-Aug-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6639	12	02-Aug-2025

Table 96

O/P Mon - Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Emission Bandwidth	± 545.65 kHz
Maximum Conducted Output Power	± 1.38 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Power Spectral Density	± 1.49 dB

Table 97

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.