



## Element Materials Technology

(Formerly PCTEST)  
18855 Adams Court, Morgan Hill, CA 95037 USA  
Tel. 408.538.5600  
<http://www.element.com>



### MEASUREMENT REPORT FCC PART 15.247 / ISED RSS-247 Bluetooth (HDR)

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

10/25/2024 - 1/2/2025

**Test Report Issue Date:**

1/29/2025

**Test Site/Location:**

Element Materials Technology, Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2410210074-05.BCG

**FCC ID:**

BCGA3268

**IC:**

579C-A3268

**APPLICANT:**

Apple Inc.

**Application Type:**

Certification

**Model/HVIN:**

A3268

**EUT Type:**

Tablet Device

**Max. RF Output Power:**

80.910 mW (19.08 dBm) Peak Conducted

**Frequency Range:**

2404 – 2476MHz

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**ISED Specification:**

RSS-247 Issue 3

**Test Procedure(s):**

ANSI C63.10-2020, KDB 558074 D01 v05r02


This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez

Executive Vice President



<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 1 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## TABLE OF CONTENTS

1.0	INTRODUCTION .....	3
1.1	Scope .....	3
1.2	Element Materials Technology Test Location .....	3
1.3	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities .....	4
2.3	Antenna Description .....	5
2.4	Test Support Equipment.....	6
2.5	Test Configuration .....	6
2.6	Software and Firmware .....	6
2.7	EMI Suppression Device(s)/Modifications .....	6
3.0	DESCRIPTION OF TESTS .....	7
3.1	Evaluation Procedure .....	7
3.2	AC Line Conducted Emissions .....	7
3.3	Radiated Emissions .....	8
3.4	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS .....	9
5.0	MEASUREMENT UNCERTAINTY .....	10
6.0	TEST EQUIPMENT CALIBRATION DATA .....	11
7.0	TEST RESULTS.....	12
7.1	Summary .....	12
7.2	Bandwidth Measurement.....	13
7.3	Output Power Measurement.....	23
7.4	Power Spectral Density .....	27
7.5	Conducted Authorized Band Edge .....	56
7.6	Conducted Spurious Emissions.....	61
7.7	Radiated Spurious Emissions – Above 1GHz .....	69
7.8	Radiated Spurious Emissions – Below 1GHz.....	81
7.9	AC Line-Conducted Emissions Measurement .....	85
8.0	CONCLUSION.....	89

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 2 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

**Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.**

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 3 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA3268, IC: 579C-A3268**. The data found in this test report was taken with the EUT operating in Bluetooth HDR mode. While in HDR mode, the Bluetooth transmitter hops pseudo-randomly between 73 channels.

**Test Device Serial No.:** QCWY69QGC5, T2FHC6NW46, CJ2X56PPQJ, DQD9GW7HXXH, DLXHAC000010000RK4

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT

This device supports BT Beamforming

Ch.	Frequency (MHz)
01	2404
:	:
38	2441
:	:
73	2476

**Table 2-1. Bluetooth HDR Frequency / Channel Operations**

#### Note:

This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 73 different channels in the 2400 – 2483.5MHz band.

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2020. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles				
HDR Mode		Duty Cycle [%]		
		Antenna WF7b	Antenna WF2b	TxBF
4M	ePA	100	100	100
	iPA	100	100	100
8M	ePA	100	100	100
	iPA	100	100	100

**Table 2-2. Measured Duty Cycles**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 4 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

This device supports simultaneous transmission operations, which allows multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	Thread	WLAN	NB UNII	WIFI 5GHz	WIFI 6GHz
		BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 b/g/n/ax	BDR, HDR4/8	802.11 a/n/ac/ax	802.11 a/ax
Ant WF7b	Config 1	✓	✗	✗	✗	✓	✗
Ant WF7b	Config 2	✓	✗	✗	✗	✗	✓
Ant WF7b	Config 3	✗	✓	✗	✗	✓	✗
Ant WF7b	Config 4	✗	✓	✗	✗	✗	✓
Ant WF7b	Config 5	✗	✗	✓	✓	✗	✗

**Table 2-3. Simultaneous Transmission Configurations**

✓ = Support; ✗ = Not Support

**Note:**

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in RF Bluetooth and RF UNII test reports.

Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4 GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4 GHz), in both connected and disconnected modes, and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

## 2.3 Antenna Description

The following antenna gains provided by manufacturer were used for testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna WF7b	Antenna WF2b
2.4	1.6	1.0

**Table 2-4. Highest Antenna Gain**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 5 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A

**Table 2-5. Test Support Equipment List**

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2020 and KDB 558074 D01 v05r02. ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and the worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

## 2.6 Software and Firmware

The test was conducted with firmware version 22D20 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 6 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 7 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 8 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 9 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 10 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2495A	Power Meter	7/8/2024	Annual	7/8/2025	1039008
Anritsu	MA2411B	Pulse Power Sensor	7/1/2024	Annual	7/1/2025	1911105
Anritsu	MA2411B	Pulse Power Sensor	10/21/2024	Annual	10/21/2025	1027293
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/14/2024	Annual	3/14/2025	T058701-01
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2024	Annual	6/10/2025	-
Keysight Technology	N9040B	UXA Signal Analyzer	5/28/2024	Annual	5/28/2025	MY57212015
Keysight Technology	N9030A	PXA Signal Analyzer	7/11/2024	Annual	7/11/2025	MY49430244
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	3/1/2024	Annual	3/1/2025	102145
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/14/2024	Annual	8/14/2025	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/10/2024	Annual	6/10/2025	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/21/2024	Annual	6/21/2025	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2024	Annual	4/24/2025	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

**Table 6-1. Test Equipment List**

**Note:**

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- \* denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 11 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA3268  
 IC: 579C-A3268  
 FCC Classification: Digital Transmission System (DTS)  
 Number of Channels: 73

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(3)	RSS-247 [5.4(d)]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8])	AC LINE CONDUCTED	PASS	Section 7.9

**Table 7-1. Summary of Test Results**

#### Notes:

- All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Conducted Automation,” Version 1.1.1.
- For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.1.0.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 12 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.2 Bandwidth Measurement

§2.1049; §15.247(a)(2); RSS-247 [5.2]; RSS-Gen [6.7]

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible 6dB bandwidth is 500 kHz.***

### Test Procedure Used

ANSI C63.10-2020 – Subclause 11.8.2 Option 2

KDB 558074 D01 v05r02 – Section 8.2

RSS-Gen [6.7]

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth and the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 13 of 89

V 10.6 09/14/2023

**Test Setup**


The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

**Test Notes**

All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 14 of 89

## Antenna WF7b

Frequency [MHz]	Mode	Power Scheme	Channel	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2404	HDR4	ePA	1	2.356	2.133	0.50	Pass
2441	HDR4	ePA	38	2.356	2.131	0.50	Pass
2476	HDR4	ePA	73	2.356	2.134	0.50	Pass
2404	HDR8	ePA	1	4.910	4.216	0.50	Pass
2441	HDR8	ePA	38	4.909	4.219	0.50	Pass
2476	HDR8	ePA	73	4.910	4.219	0.50	Pass


**Table 7-2. 6dB BW & 99% OBW Measurements Antenna WF7b**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 15 of 89


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



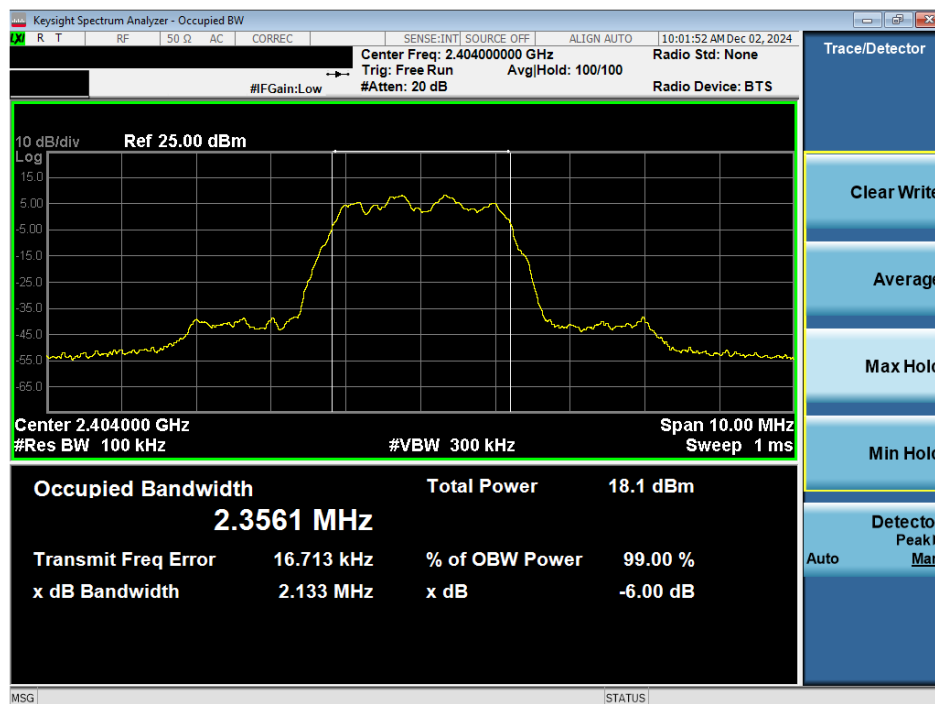

Plot 7-1. 6dB BW & 99% OBW Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

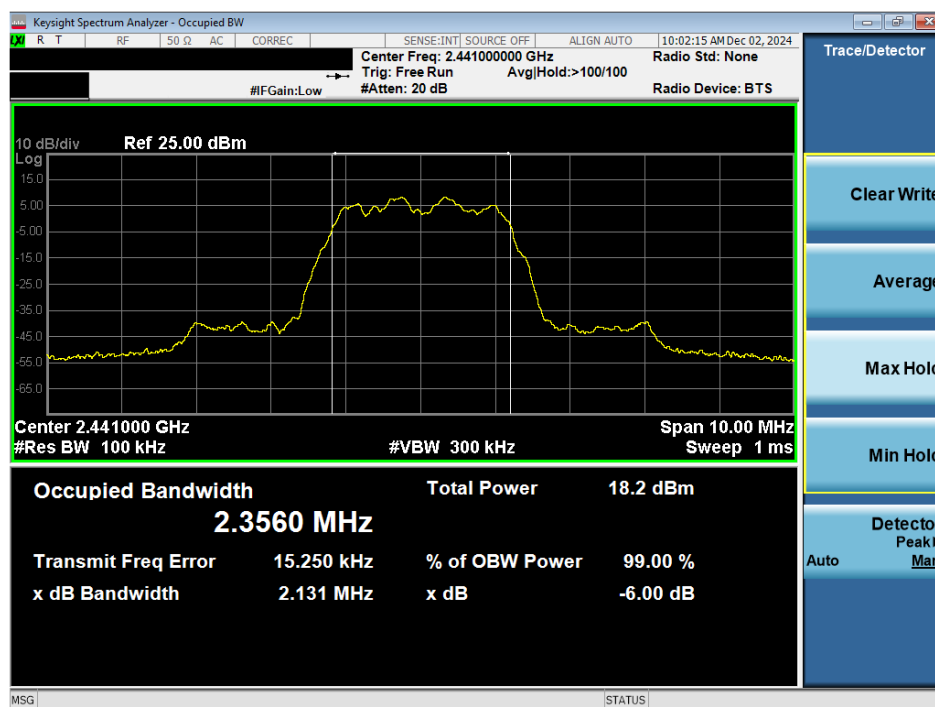


Plot 7-2. 6dB BW & 99% OBW Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)


FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 16 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

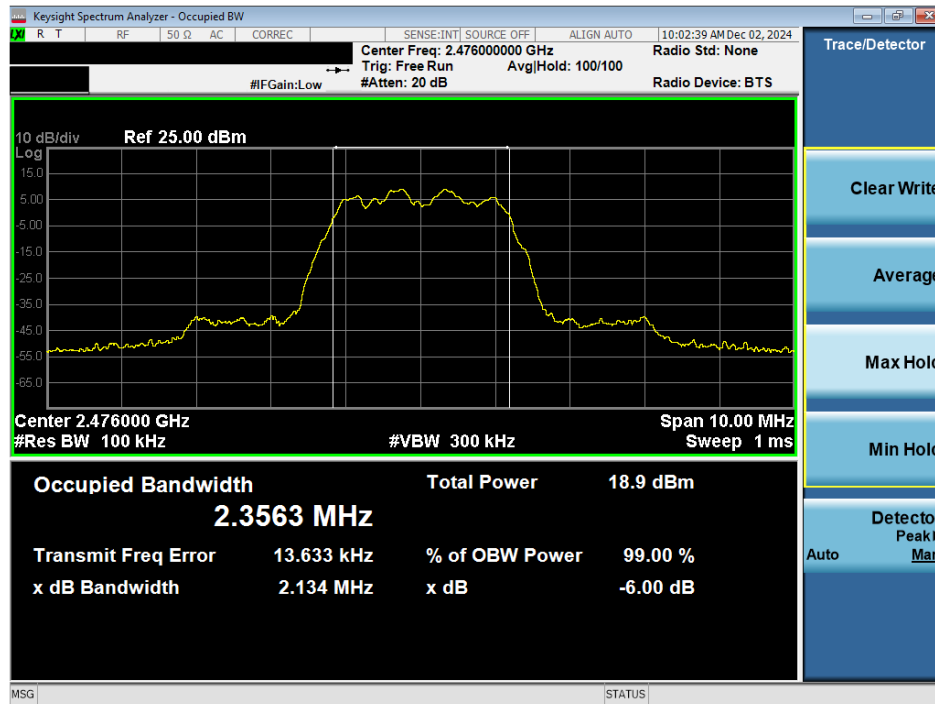

Plot 7-3. 6dB BW & 99% OBW Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

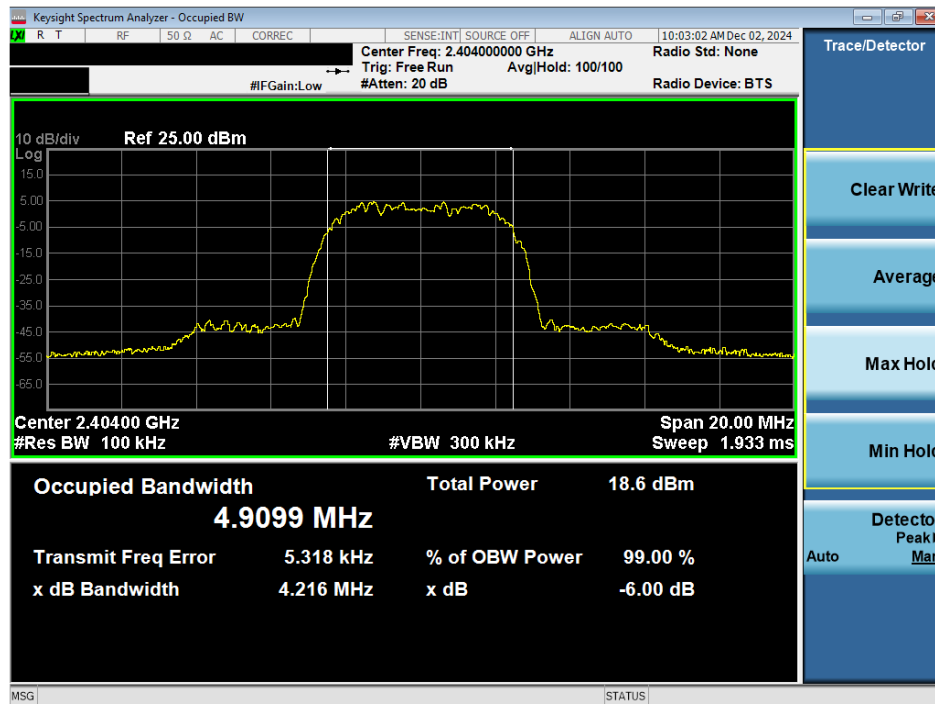


Plot 7-4. 6dB BW & 99% OBW Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)


FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 17 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

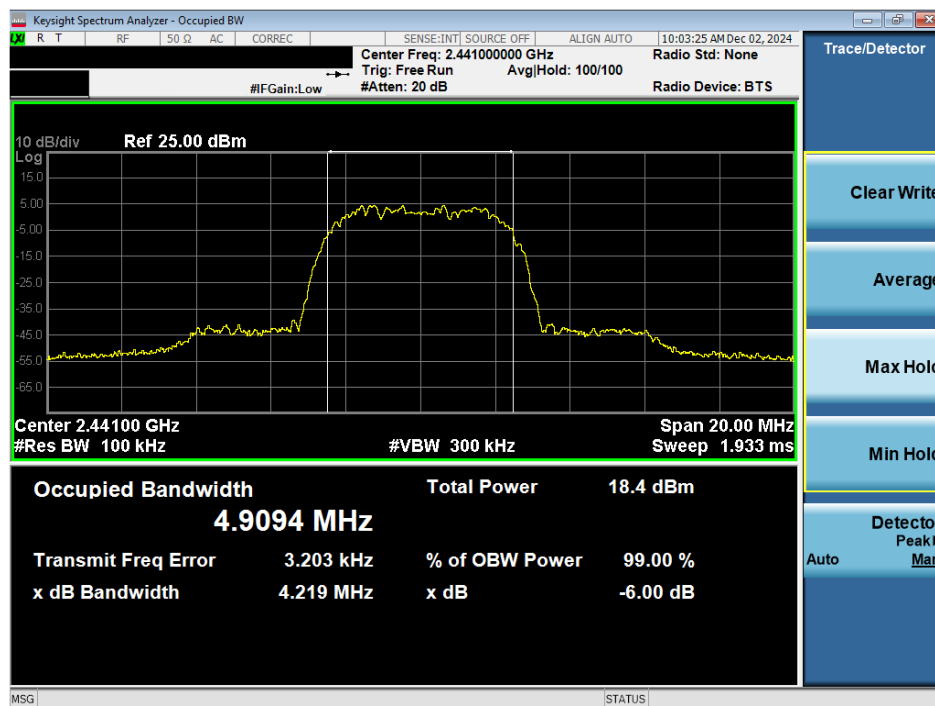

Plot 7-5. 6dB BW & 99% OBW Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

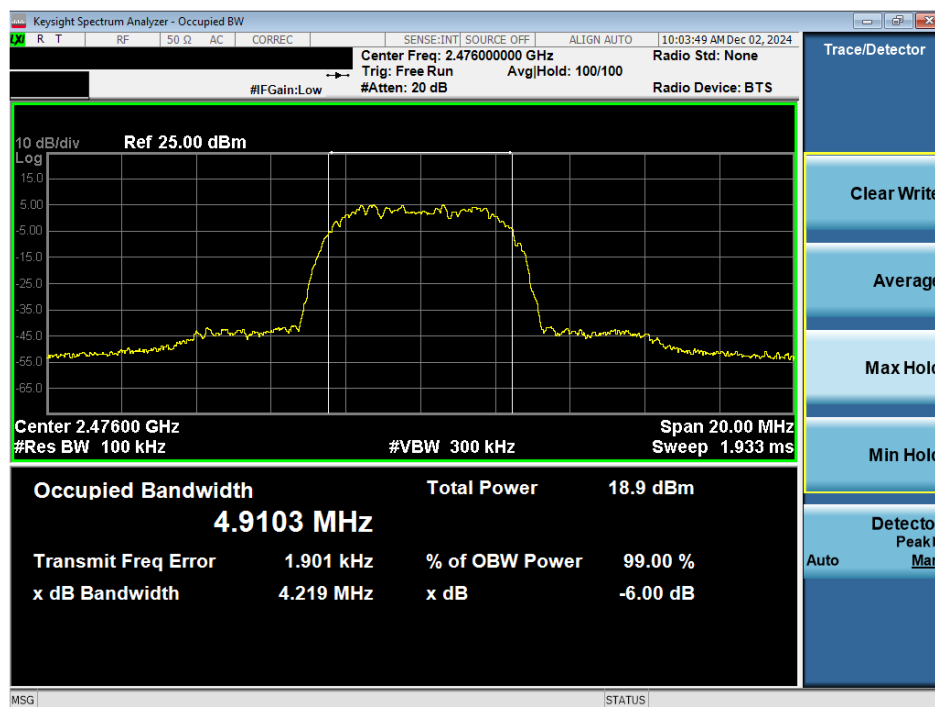

Plot 7-6. 6dB BW & 99% OBW Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 18 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


## Antenna WF2b

Frequency [MHz]	Mode	Power Scheme	Channel	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2404	HDR4	ePA	1	2.347	2.118	0.50	Pass
2441	HDR4	ePA	38	2.346	2.118	0.50	Pass
2476	HDR4	ePA	73	2.346	2.118	0.50	Pass
2404	HDR8	ePA	1	4.857	4.197	0.50	Pass
2441	HDR8	ePA	38	4.857	4.194	0.50	Pass
2476	HDR8	ePA	73	4.858	4.194	0.50	Pass


**Table 7-3. 6dB BW & 99% OBW Measurements Antenna WF2b**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 19 of 89

V 10.6 09/14/2023

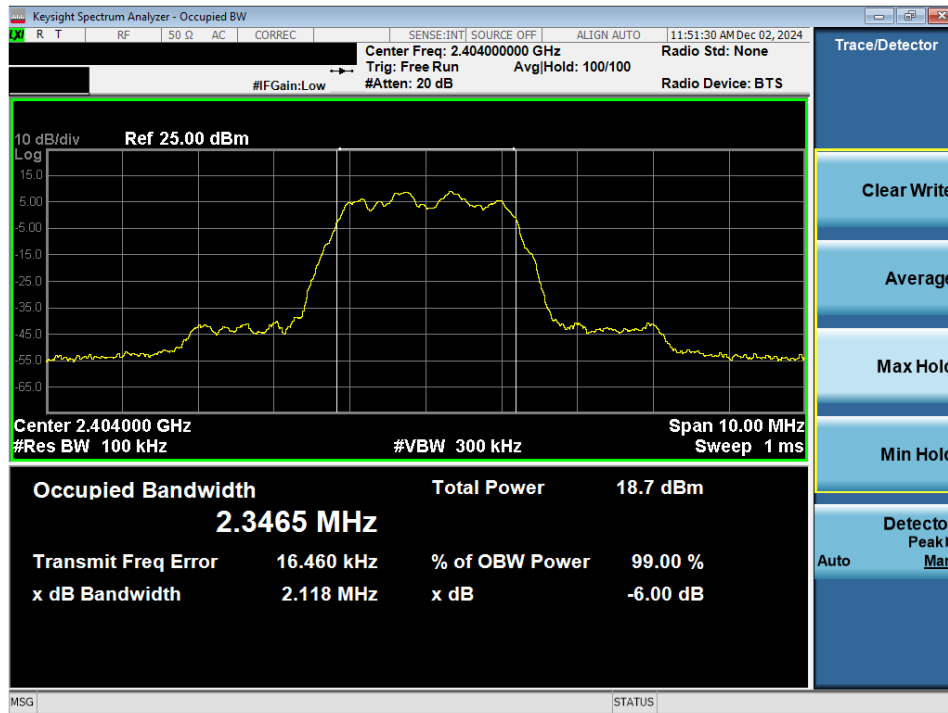

Plot 7-7. 6dB BW & 99% OBW Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

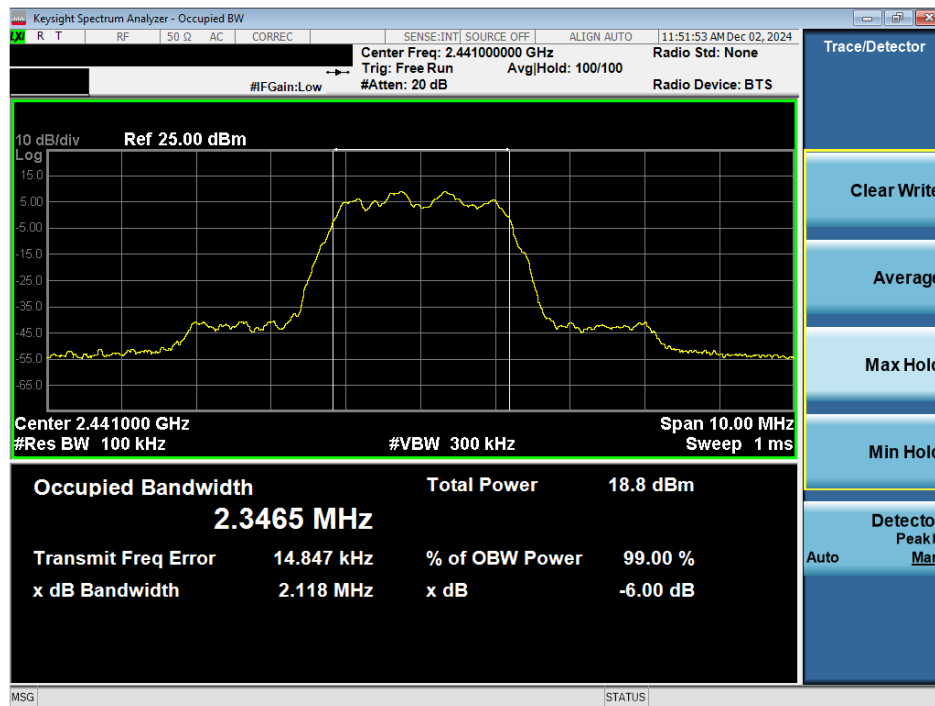


Plot 7-8. 6dB BW & 99% OBW Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 20 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

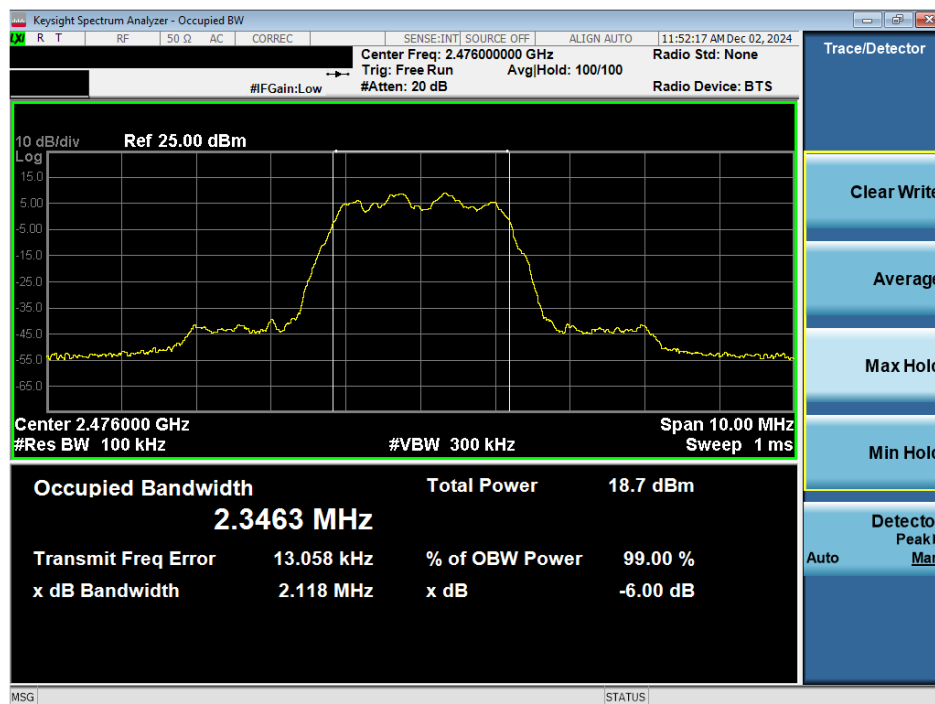

Plot 7-9. 6dB BW & 99% OBW Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

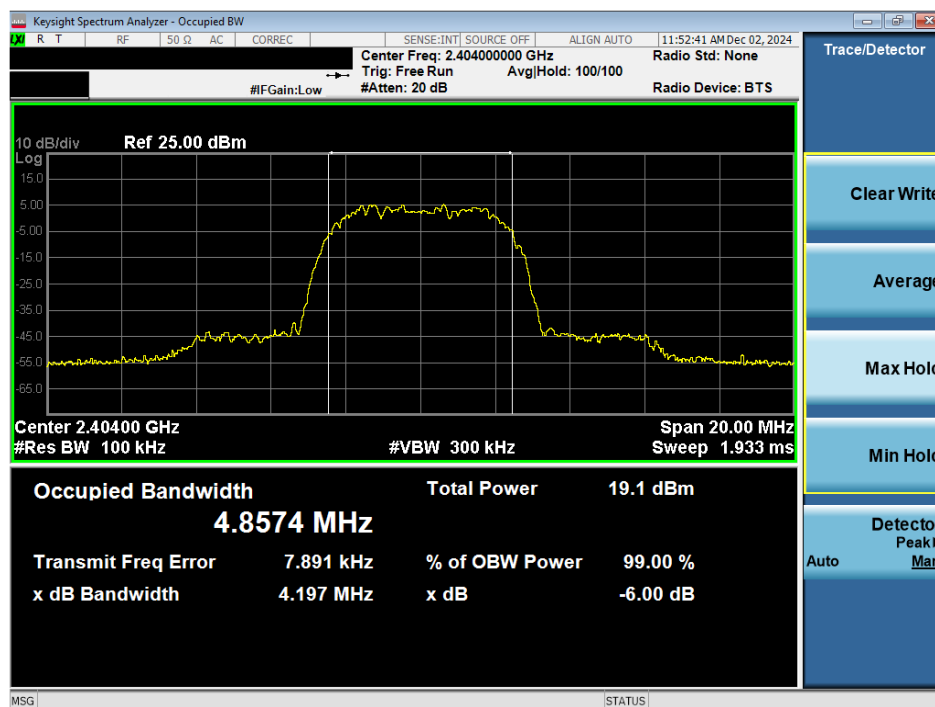


Plot 7-10. 6dB BW & 99% OBW Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 21 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

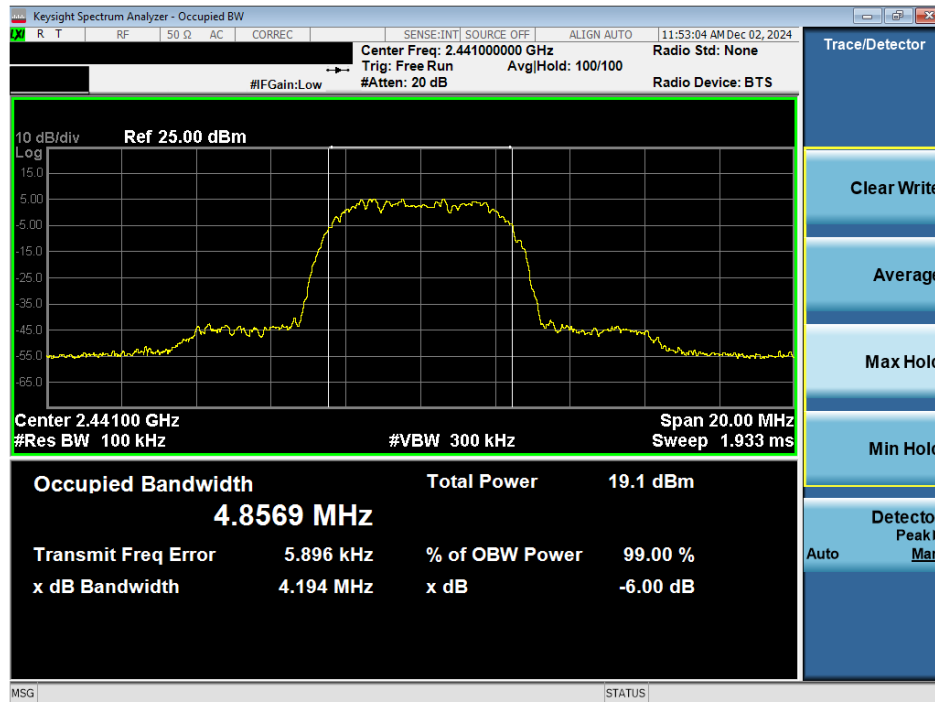

Plot 7-11. 6dB BW & 99% OBW Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

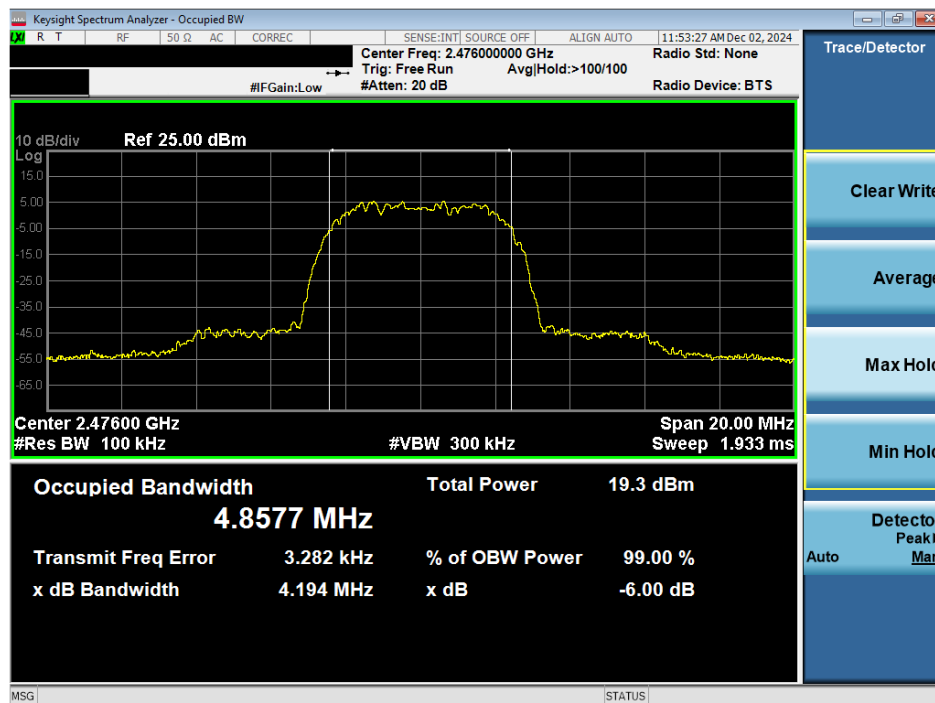

Plot 7-12. 6dB BW & 99% OBW Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 22 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 7.3 Output Power Measurement

**§15.247(b)(3); RSS-247 [5.4(d)]**

### **Test Overview and Limits**

The transmitter antenna terminal of the EUT is connected to the input of a spectrum analyzer. Measurements are made while the EUT is operating at maximum power and at the appropriate frequencies.

***The maximum peak conducted output power of digital modulation systems operating in the 2400-2483.5 MHz band is 1 Watt.***

***The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.***

***For DTSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.***

### **Test Procedure Used**

ANSI C63.10-2020 – Subclause 11.9.1.2 PKPM1 Peak Power Method  
 KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method  
 ANSI C63.10-2020 – Subclause 11.9.2.3.2 Method AVGPM-G  
 KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)  
 ANSI C63.10-2020 – Subclause 14.4 Measure-and-Sum Technique  
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

### **Test Settings**

#### **Method PKPM1 (Peak Power Measurement)**

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### **Method AVGPM-G (Average Power Measurement)**

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement**

### **Test Notes**

None

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 23 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

### 7.3.1 Peak Output Power Measurement – Bluetooth (HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2404	4.0	ePA	1	15.72	37.325	30.00	-14.28	1.60	17.32	36.02	-18.70
2441	4.0	ePA	38	15.38	34.514	30.00	-14.62	1.60	16.98	36.02	-19.04
2476	4.0	ePA	73	15.93	39.174	30.00	-14.07	1.60	17.53	36.02	-18.49
2404	4.0	IPA	1	7.72	5.916	30.00	-22.28	1.60	9.32	36.02	-26.70
2441	4.0	IPA	38	7.67	5.848	30.00	-22.33	1.60	9.27	36.02	-26.75
2476	4.0	IPA	73	7.32	5.395	30.00	-22.69	1.60	8.92	36.02	-27.11
2404	8.0	ePA	1	15.92	39.084	30.00	-14.08	1.60	17.52	36.02	-18.50
2441	8.0	ePA	38	15.86	38.548	30.00	-14.15	1.60	17.46	36.02	-18.57
2476	8.0	ePA	73	16.20	41.687	30.00	-13.80	1.60	17.80	36.02	-18.22
2404	8.0	IPA	1	7.89	6.152	30.00	-22.11	1.60	9.49	36.02	-26.53
2441	8.0	IPA	38	7.62	5.781	30.00	-22.38	1.60	9.22	36.02	-26.80
2476	8.0	IPA	73	7.72	5.916	30.00	-22.28	1.60	9.32	36.02	-26.70

**Table 7-4. Peak Conducted Output Power Measurements Antenna WF7b (Bluetooth HDR)**

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2404	4.0	ePA	1	15.41	34.754	30.00	-14.59	1.00	16.41	36.02	-19.61
2441	4.0	ePA	38	15.44	34.995	30.00	-14.56	1.00	16.44	36.02	-19.58
2476	4.0	ePA	73	15.55	35.892	30.00	-14.45	1.00	16.55	36.02	-19.47
2404	4.0	IPA	1	7.40	5.495	30.00	-22.60	1.00	8.40	36.02	-27.62
2441	4.0	IPA	38	7.34	5.420	30.00	-22.66	1.00	8.34	36.02	-27.68
2476	4.0	IPA	73	7.33	5.408	30.00	-22.67	1.00	8.33	36.02	-27.69
2404	8.0	ePA	1	15.36	34.356	30.00	-14.64	1.00	16.36	36.02	-19.66
2441	8.0	ePA	38	15.67	36.898	30.00	-14.33	1.00	16.67	36.02	-19.35
2476	8.0	ePA	73	16.04	40.179	30.00	-13.96	1.00	17.04	36.02	-18.98
2404	8.0	IPA	1	7.34	5.420	30.00	-22.66	1.00	8.34	36.02	-27.68
2441	8.0	IPA	38	7.29	5.358	30.00	-22.71	1.00	8.29	36.02	-27.73
2476	8.0	IPA	73	7.29	5.358	30.00	-22.72	1.00	8.29	36.02	-27.74

**Table 7-5. Peak Conducted Output Power Measurements Antenna WF2b (Bluetooth HDR)**

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				Antenna WF7b		Antenna WF2b		Summed							
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]						
2404	4.0	ePA	1	15.41	34.754	15.34	34.198	18.38	68.865	30.00	-11.62	4.32	22.70	36.02	-13.33
2441	4.0	ePA	38	15.56	35.975	15.55	35.892	18.56	71.779	30.00	-11.44	4.32	22.88	36.02	-13.15
2476	4.0	ePA	73	15.66	36.813	15.61	36.392	18.64	73.114	30.00	-11.36	4.32	22.96	36.02	-13.07
2404	4.0	IPA	1	7.59	5.741	7.35	5.433	10.48	11.169	30.00	-19.52	4.32	14.80	36.02	-21.23
2441	4.0	IPA	38	7.07	5.093	7.36	5.445	10.23	10.544	30.00	-19.77	4.32	14.55	36.02	-21.48
2476	4.0	IPA	73	7.50	5.623	7.19	5.236	10.36	10.864	30.00	-19.64	4.32	14.68	36.02	-21.35
2404	8.0	ePA	1	15.88	38.726	15.69	37.068	18.79	75.883	30.00	-11.21	4.32	23.11	36.02	-12.92
2441	8.0	ePA	38	15.79	37.931	15.87	38.637	18.84	76.560	30.00	-11.16	4.32	23.16	36.02	-12.87
2476	8.0	ePA	73	16.16	41.305	15.98	39.628	19.08	80.910	30.00	-10.92	4.32	23.40	36.02	-12.63
2404	8.0	IPA	1	7.77	5.984	7.29	5.358	10.55	11.350	30.00	-19.45	4.32	14.87	36.02	-21.16
2441	8.0	IPA	38	7.90	6.166	7.34	5.420	10.64	11.588	30.00	-19.36	4.32	14.96	36.02	-21.07
2476	8.0	IPA	73	7.58	5.728	7.16	5.200	10.38	10.914	30.00	-19.62	4.32	14.70	36.02	-21.33

**Table 7-6. Peak Conducted Output Power Measurements TxBF (Bluetooth HDR)**

FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 24 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

### 7.3.2 Average Output Power Measurement – Bluetooth (HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2404	4.0	ePA	1	12.71	18.664	30.00	-17.30	1.60	14.31	36.02	-21.72
2441	4.0	ePA	38	12.40	17.378	30.00	-17.60	1.60	14.00	36.02	-22.02
2476	4.0	ePA	73	12.96	19.770	30.00	-17.04	1.60	14.56	36.02	-21.46
2404	4.0	IPA	1	5.00	3.162	30.00	-25.01	1.60	6.60	36.02	-29.43
2441	4.0	IPA	38	4.95	3.126	30.00	-25.05	1.60	6.55	36.02	-29.47
2476	4.0	IPA	73	4.61	2.891	30.00	-25.39	1.60	6.21	36.02	-29.81
2404	8.0	ePA	1	12.64	18.365	30.00	-17.36	1.60	14.24	36.02	-21.78
2441	8.0	ePA	38	12.59	18.155	30.00	-17.41	1.60	14.19	36.02	-21.83
2476	8.0	ePA	73	12.97	19.815	30.00	-17.03	1.60	14.57	36.02	-21.45
2404	8.0	IPA	1	4.86	3.062	30.00	-25.14	1.60	6.46	36.02	-29.56
2441	8.0	IPA	38	4.60	2.884	30.00	-25.40	1.60	6.20	36.02	-29.82
2476	8.0	IPA	73	4.72	2.965	30.00	-25.28	1.60	6.32	36.02	-29.70

**Table 7-7. Average Conducted Output Power Measurements Antenna WF7b (Bluetooth HDR)**

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				[dBm]	[mW]						
2404	4.0	ePA	1	12.72	18.707	30.00	-17.28	1.00	13.72	36.02	-22.30
2441	4.0	ePA	38	12.74	18.793	30.00	-17.26	1.00	13.74	36.02	-22.28
2476	4.0	ePA	73	12.85	19.275	30.00	-17.15	1.00	13.85	36.02	-22.17
2404	4.0	IPA	1	4.86	3.062	30.00	-25.14	1.00	5.86	36.02	-30.16
2441	4.0	IPA	38	4.81	3.027	30.00	-25.19	1.00	5.81	36.02	-30.21
2476	4.0	IPA	73	4.82	3.034	30.00	-25.18	1.00	5.82	36.02	-30.20
2404	8.0	ePA	1	12.37	17.258	30.00	-17.63	1.00	13.37	36.02	-22.65
2441	8.0	ePA	38	12.63	18.323	30.00	-17.37	1.00	13.63	36.02	-22.39
2476	8.0	ePA	73	13.00	19.953	30.00	-17.00	1.00	14.00	36.02	-22.02
2404	8.0	IPA	1	4.48	2.805	30.00	-25.52	1.00	5.48	36.02	-30.54
2441	8.0	IPA	38	4.43	2.773	30.00	-25.58	1.00	5.43	36.02	-30.60
2476	8.0	IPA	73	4.44	2.780	30.00	-25.56	1.00	5.44	36.02	-30.58

**Table 7-8. Average Conducted Output Power Measurements Antenna WF2b (Bluetooth HDR)**

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	EIRP Margin [dB]
				Antenna WF7b		Antenna WF2b		Summed							
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]						
2404	4.0	ePA	1	12.41	17.418	12.65	18.408	15.54	35.810	30.00	-14.46	4.32	19.86	36.02	-16.17
2441	4.0	ePA	38	12.58	18.113	12.86	19.320	15.73	37.411	30.00	-14.27	4.32	20.05	36.02	-15.98
2476	4.0	ePA	73	12.69	18.578	12.91	19.543	15.81	38.107	30.00	-14.19	4.32	20.13	36.02	-15.90
2404	4.0	IPA	1	4.86	3.062	4.80	3.020	7.84	6.081	30.00	-22.16	4.32	12.16	36.02	-23.87
2441	4.0	IPA	38	4.36	2.729	4.84	3.048	7.62	5.781	30.00	-22.38	4.32	11.94	36.02	-24.09
2476	4.0	IPA	73	4.81	3.027	4.67	2.931	7.75	5.957	30.00	-22.25	4.32	12.07	36.02	-23.96
2404	8.0	ePA	1	12.62	18.281	12.68	18.535	15.66	36.813	30.00	-14.34	4.32	19.98	36.02	-16.05
2441	8.0	ePA	38	12.54	17.947	12.85	19.275	15.71	37.239	30.00	-14.29	4.32	20.03	36.02	-16.00
2476	8.0	ePA	73	12.93	19.634	12.95	19.724	15.95	39.355	30.00	-14.05	4.32	20.27	36.02	-15.76
2404	8.0	IPA	1	4.75	2.985	4.42	2.767	7.60	5.754	30.00	-22.40	4.32	11.92	36.02	-24.11
2441	8.0	IPA	38	4.90	3.090	4.49	2.812	7.71	5.902	30.00	-22.29	4.32	12.03	36.02	-24.00
2476	8.0	IPA	73	4.58	2.871	4.32	2.704	7.46	5.572	30.00	-22.54	4.32	11.78	36.02	-24.25

**Table 7-9. Average Conducted Output Power Measurements TxBF (Bluetooth HDR)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 25 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

**Note:**

Per ANSI C63.10-2020 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna WF7b and Antenna WF2b were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020 Subclause 14.6.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

**Sample TxBF Calculation:**

At 2404MHz the average conducted output power was measured to be 12.41 dBm for Antenna WF7b and 12.65 dBm for Antenna WF2b.

$$\text{Antenna WF7b} + \text{Antenna WF2b} = \text{TxBF}$$

$$(12.41 \text{ dBm} + 12.65 \text{ dBm}) = (17.418 \text{ mW} + 18.408 \text{ mW}) = 35.810 \text{ mW} = 15.54 \text{ dBm}$$

**Sample e.i.r.p. Calculation:**

At 2404MHz, the average conducted output power was calculated to be 15.54 dBm with antenna gain of 4.32 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$15.54 \text{ dBm} + 4.32 \text{ dBi} = 19.86 \text{ dBm}$$

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 26 of 89

V 10.6 09/14/2023

## 7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies.

***The maximum permissible power spectral density is 8 dBm in any 3 kHz band.***

### Test Procedure Used

ANSI C63.10-2020 – Subclause 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2020 – Subclause 14.5.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 27 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Antenna WF7b


Frequency [MHz]	Mode	Power Scheme	Channel No.	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2404	HDR4	ePA	1	-5.28	8.0	-13.28
2441	HDR4	ePA	38	-4.97	8.0	-12.97
2476	HDR4	ePA	73	-4.43	8.0	-12.43
2404	HDR4	iPA	1	-12.01	8.0	-20.01
2441	HDR4	iPA	38	-12.26	8.0	-20.26
2476	HDR4	iPA	73	-12.81	8.0	-20.81
2404	HDR8	ePA	1	-7.87	8.0	-15.87
2441	HDR8	ePA	38	-7.81	8.0	-15.81
2476	HDR8	ePA	73	-7.26	8.0	-15.26
2404	HDR8	iPA	1	-14.98	8.0	-22.98
2441	HDR8	iPA	38	-15.32	8.0	-23.32
2476	HDR8	iPA	73	-15.37	8.0	-23.37

**Table 7-10. Conducted Power Density Measurements Antenna WF7b**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 28 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

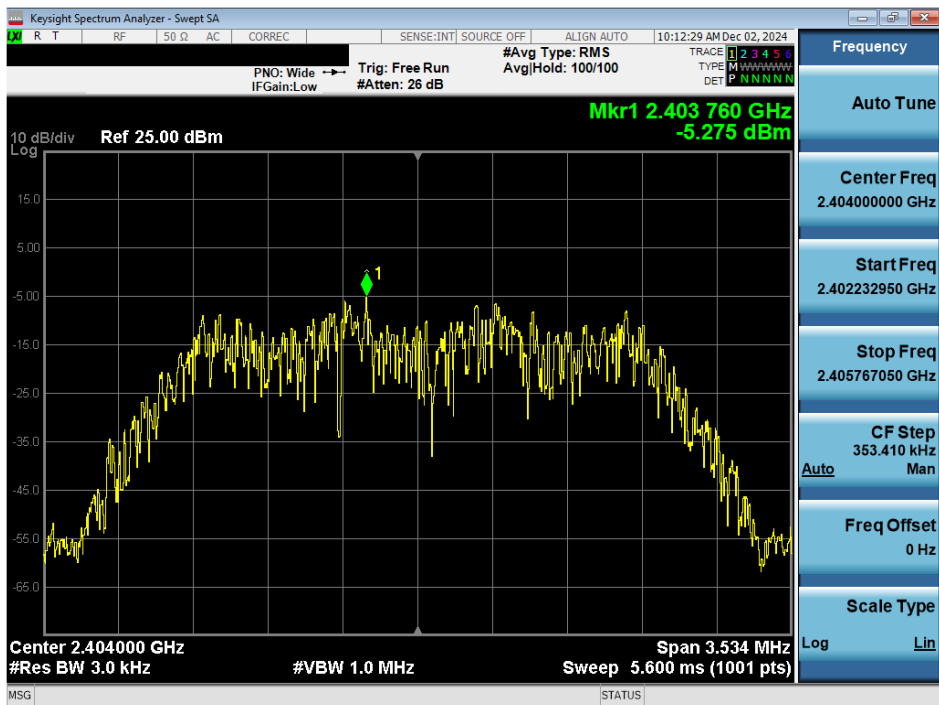

Plot 7-13. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

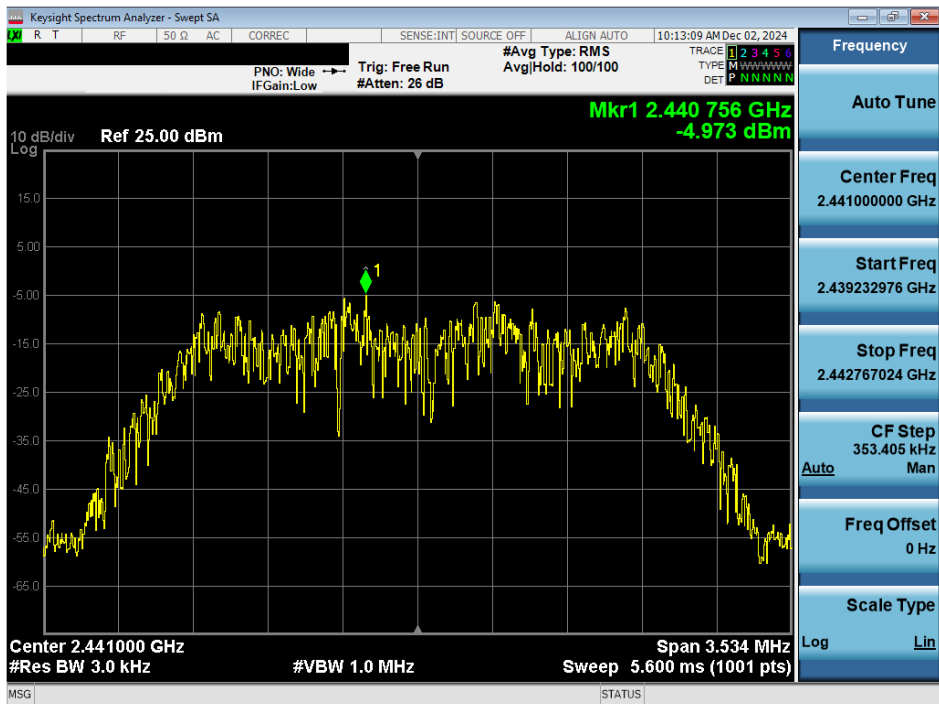


Plot 7-14. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 29 of 89


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



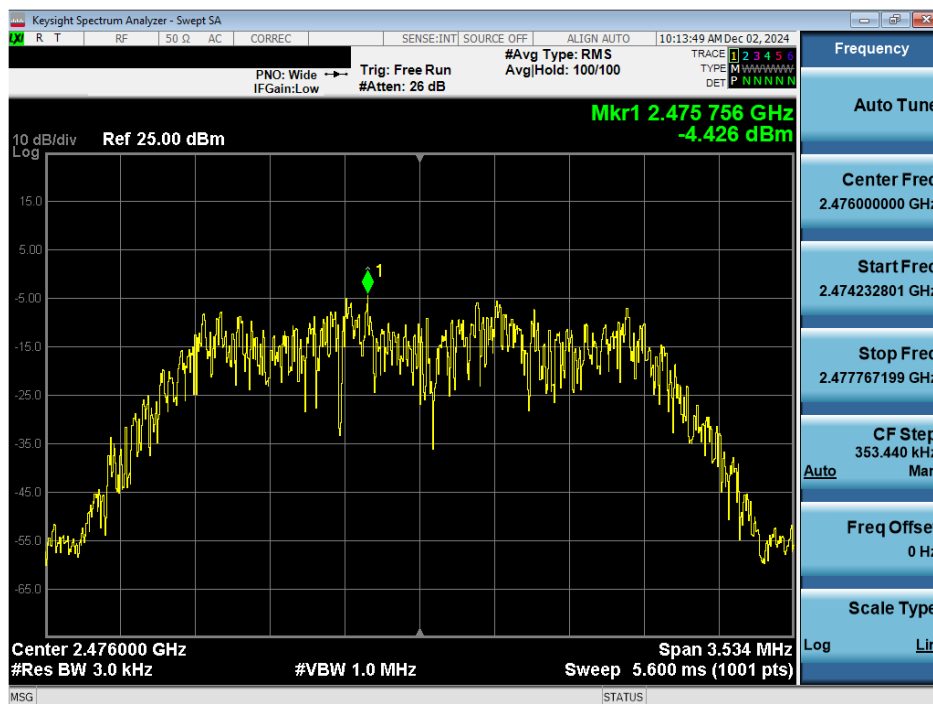


Plot 7-15. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

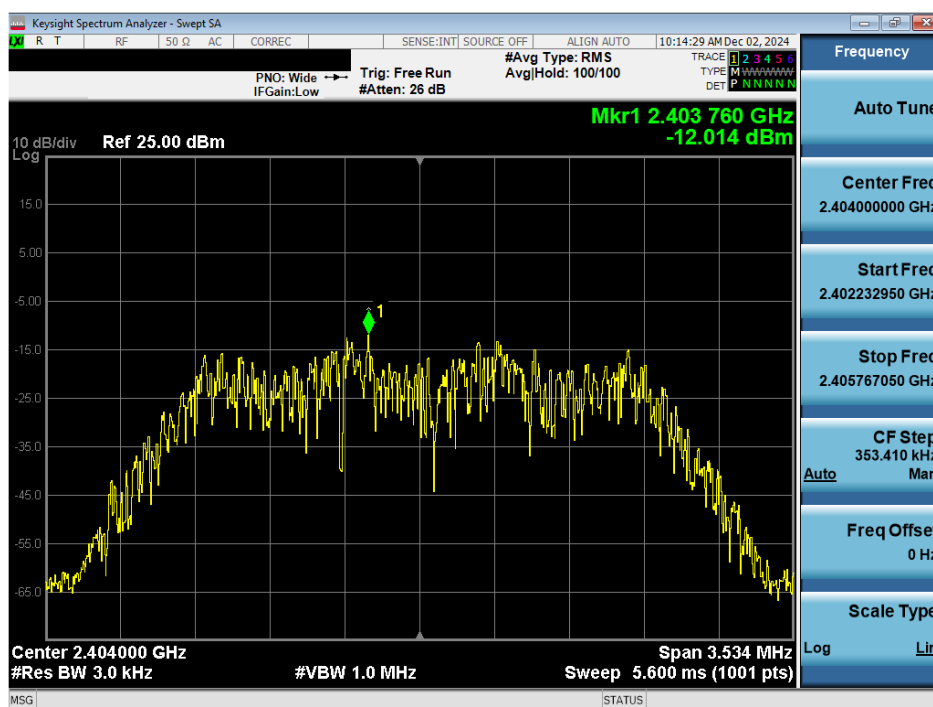


Plot 7-16. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 30 of 89

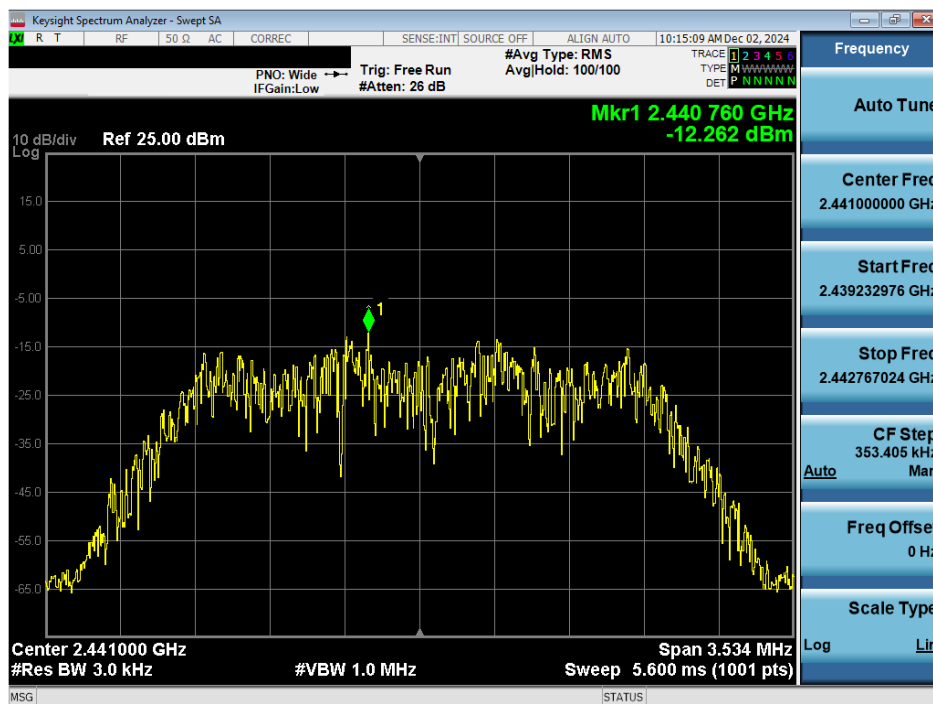


Plot 7-17. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

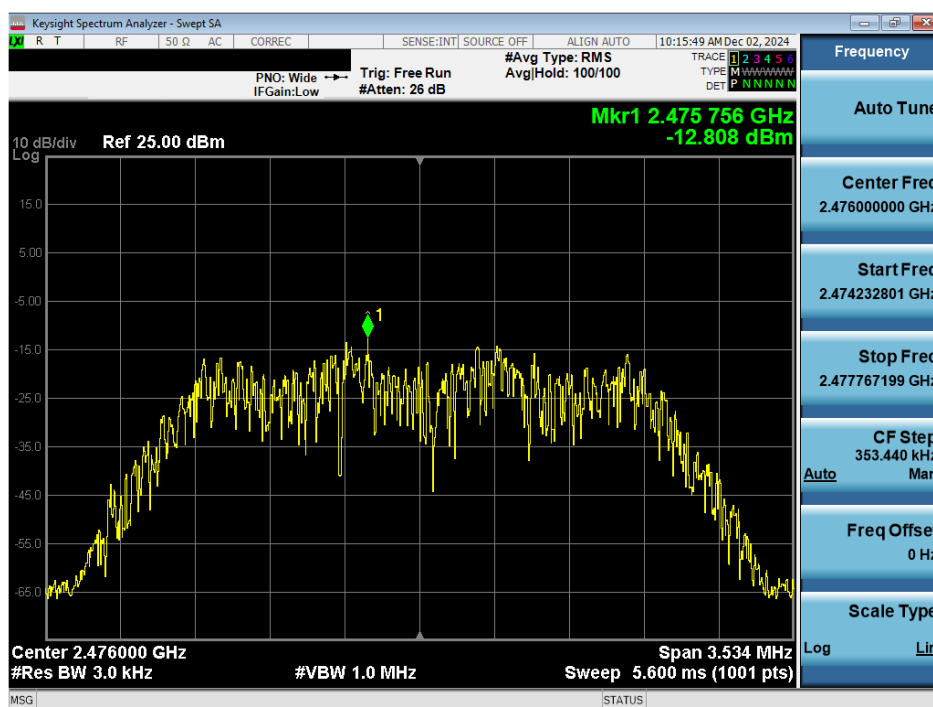


Plot 7-18. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 31 of 89

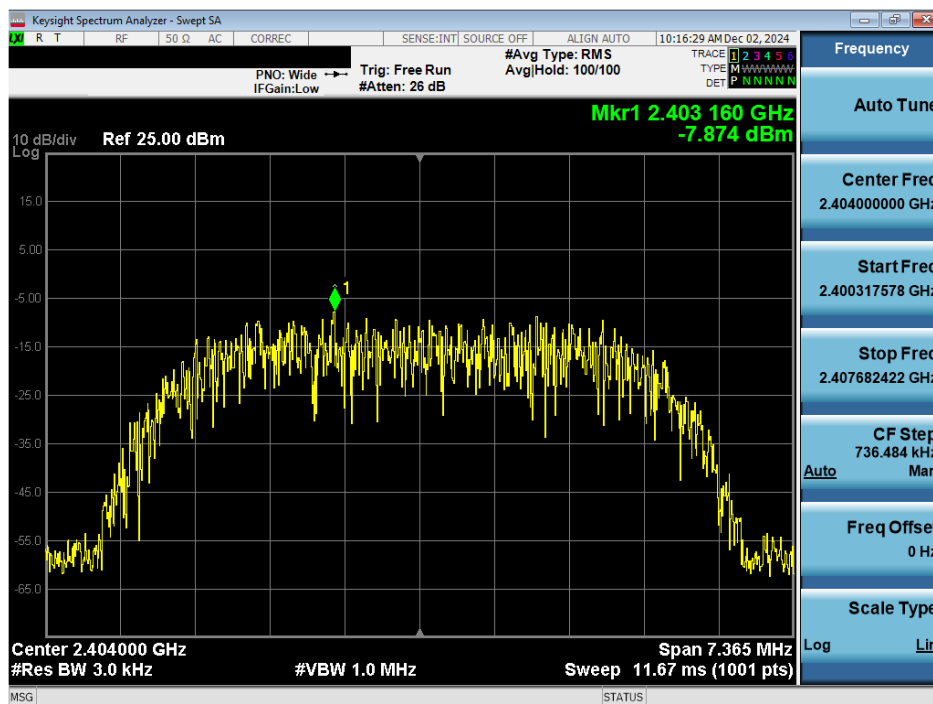

Plot 7-19. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

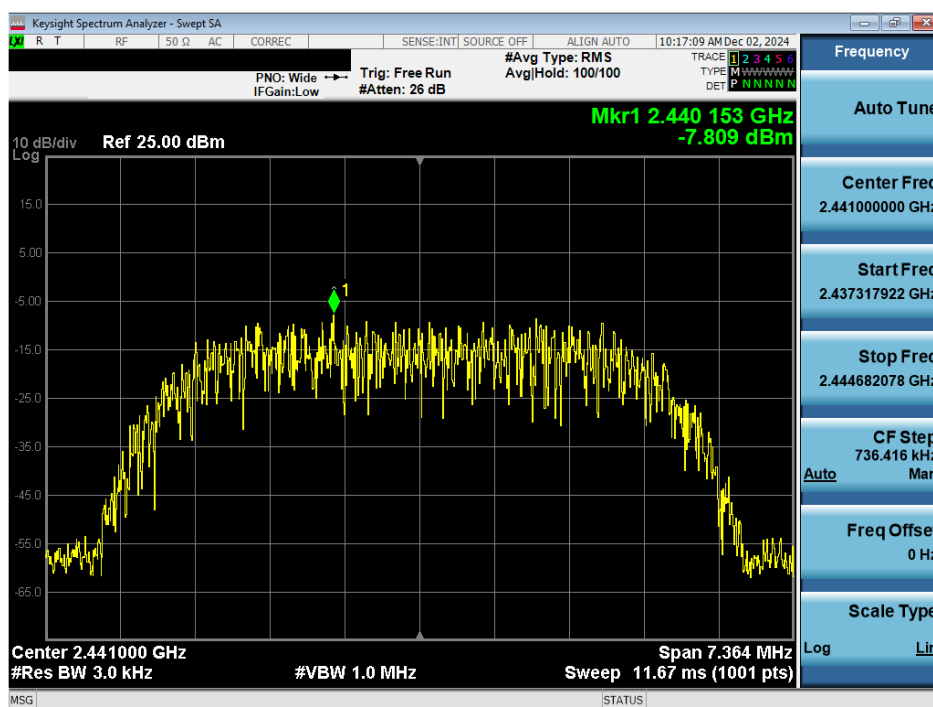


Plot 7-20. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 32 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

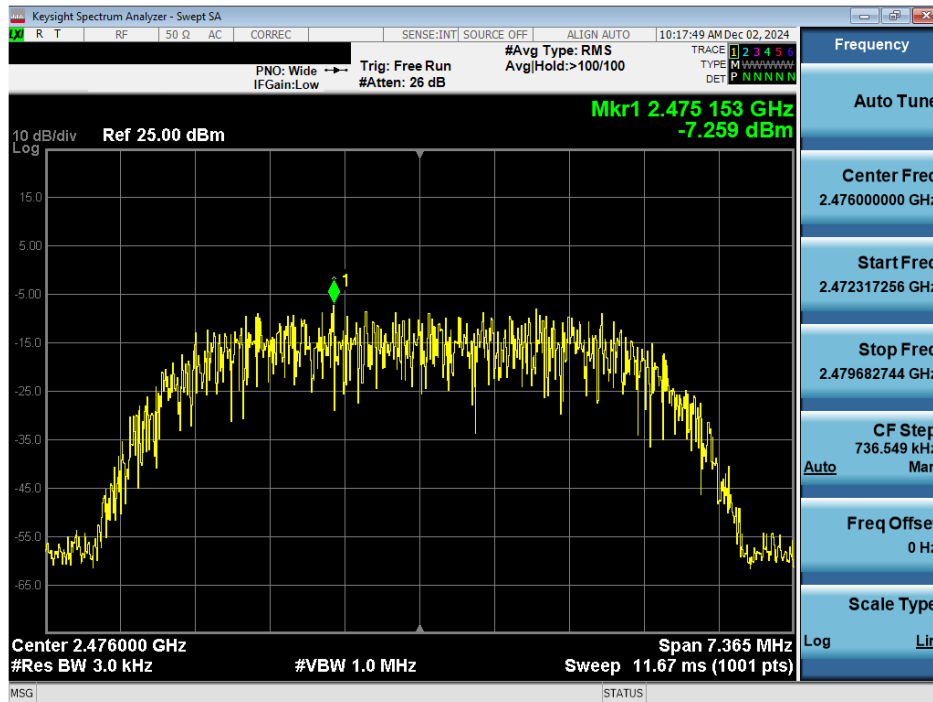

Plot 7-21. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

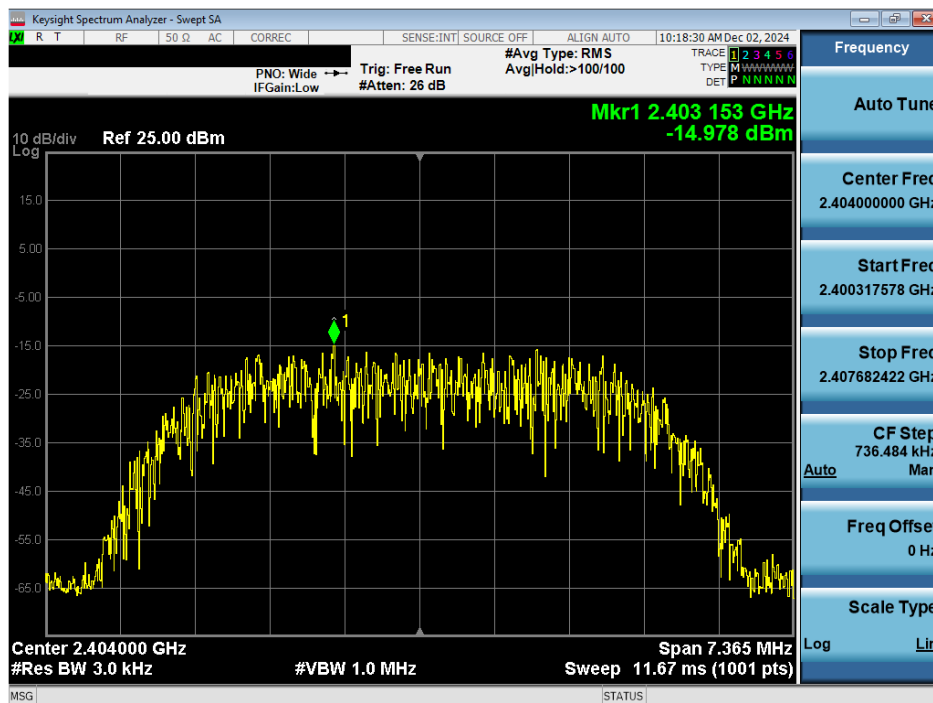


Plot 7-22. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 33 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

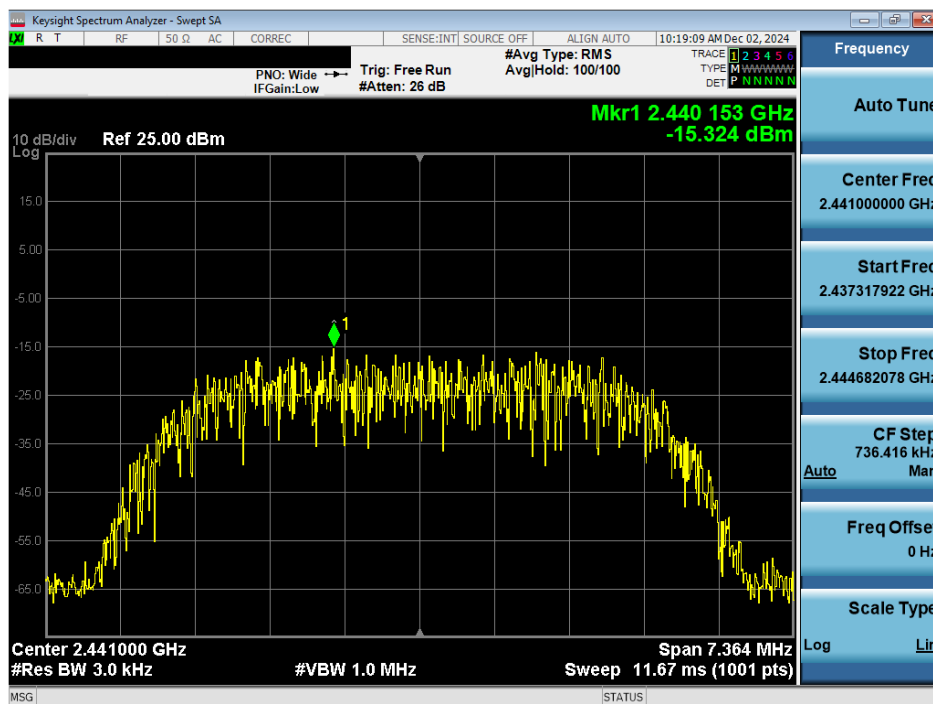

Plot 7-23. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

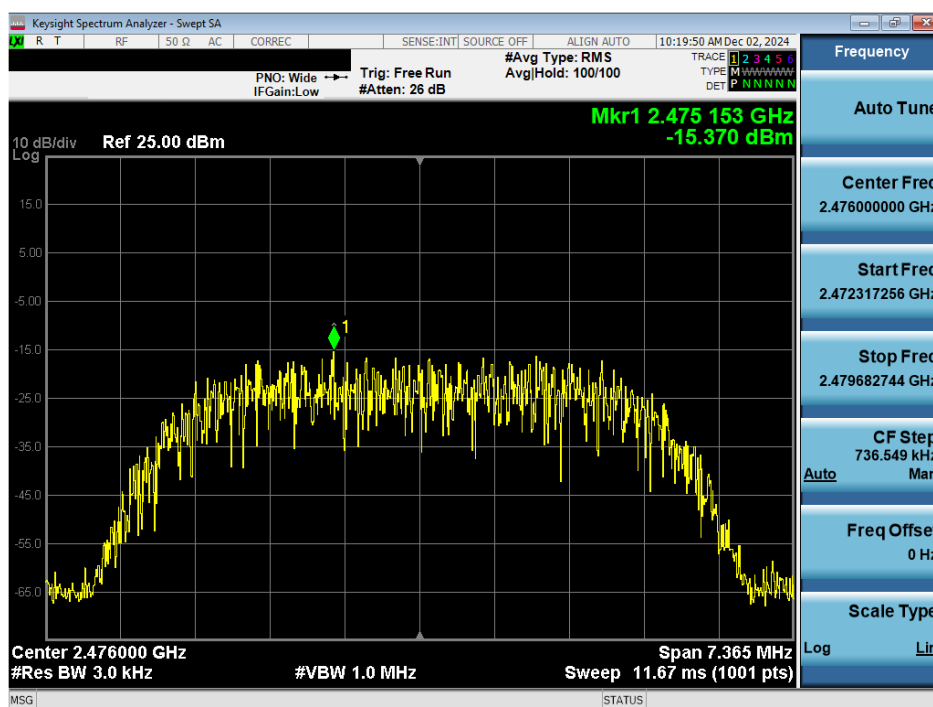

Plot 7-24. Power Spectral Density Plot Antenna WF7b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 34 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Antenna WF2b


Frequency [MHz]	Mode	Power Scheme	Channel No.	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2404	HDR4	ePA	1	-4.23	8.0	-12.23
2441	HDR4	ePA	38	-4.30	8.0	-12.30
2476	HDR4	ePA	73	-4.33	8.0	-12.33
2404	HDR4	iPA	1	-12.28	8.0	-20.28
2441	HDR4	iPA	38	-12.61	8.0	-20.61
2476	HDR4	iPA	73	-12.11	8.0	-20.11
2404	HDR8	ePA	1	-7.18	8.0	-15.18
2441	HDR8	ePA	38	-7.07	8.0	-15.07
2476	HDR8	ePA	73	-6.41	8.0	-14.41
2404	HDR8	iPA	1	-15.16	8.0	-23.16
2441	HDR8	iPA	38	-15.30	8.0	-23.30
2476	HDR8	iPA	73	-15.20	8.0	-23.20

**Table 7-11. Conducted Power Density Measurements Antenna WF2b**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 35 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

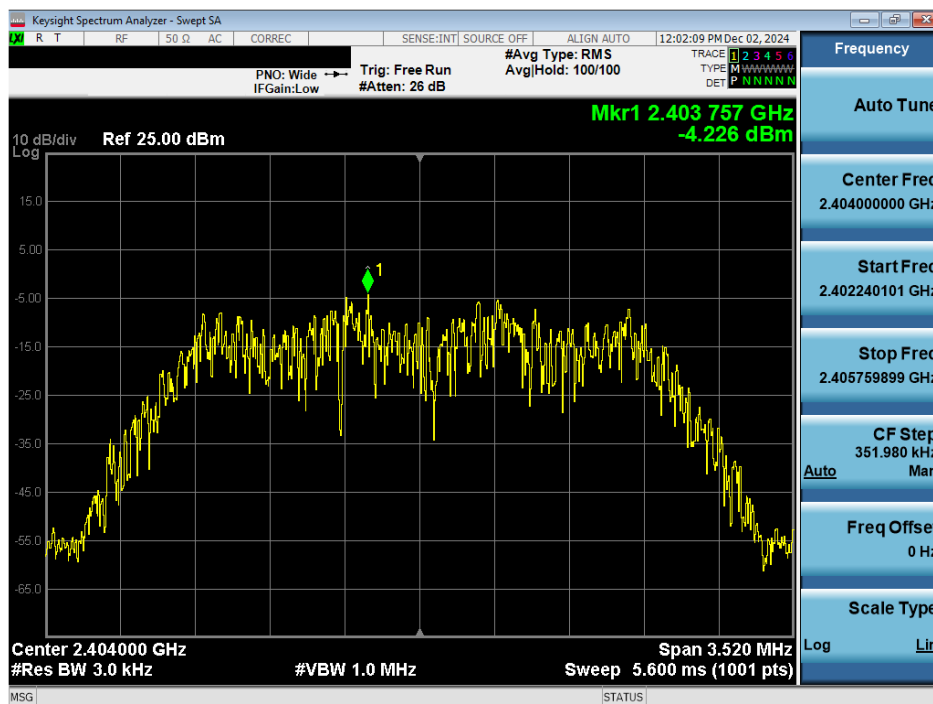

Plot 7-25. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

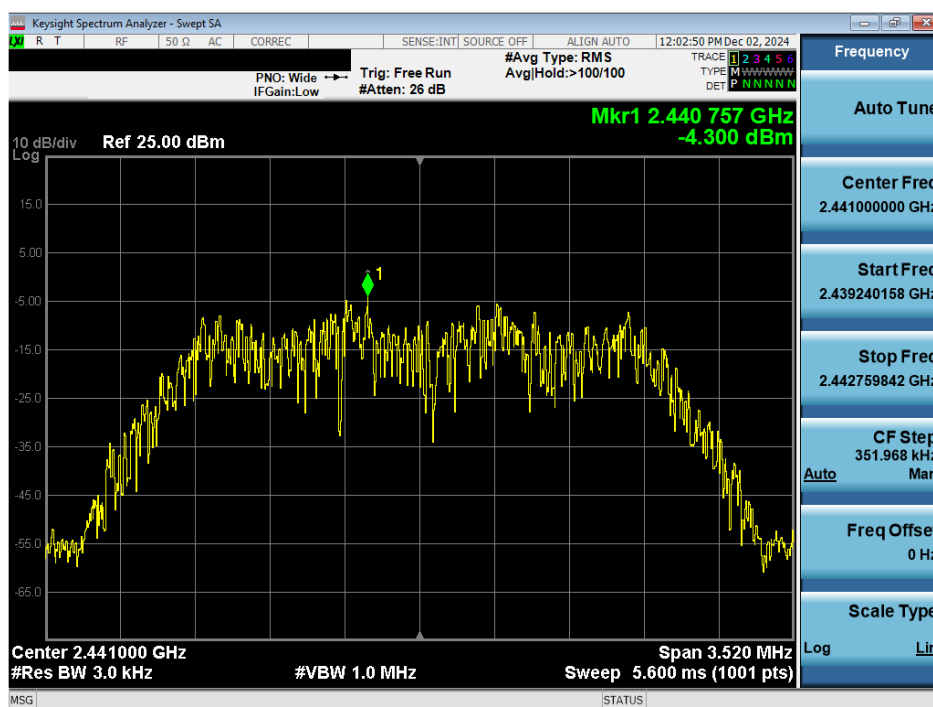


Plot 7-26. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 36 of 89


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



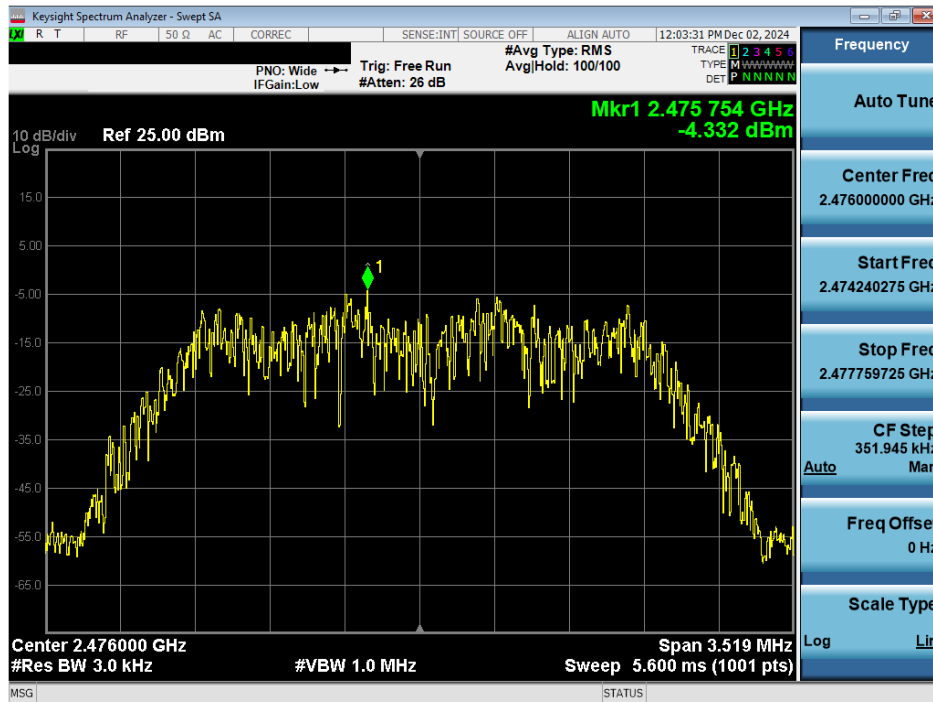


Plot 7-27. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

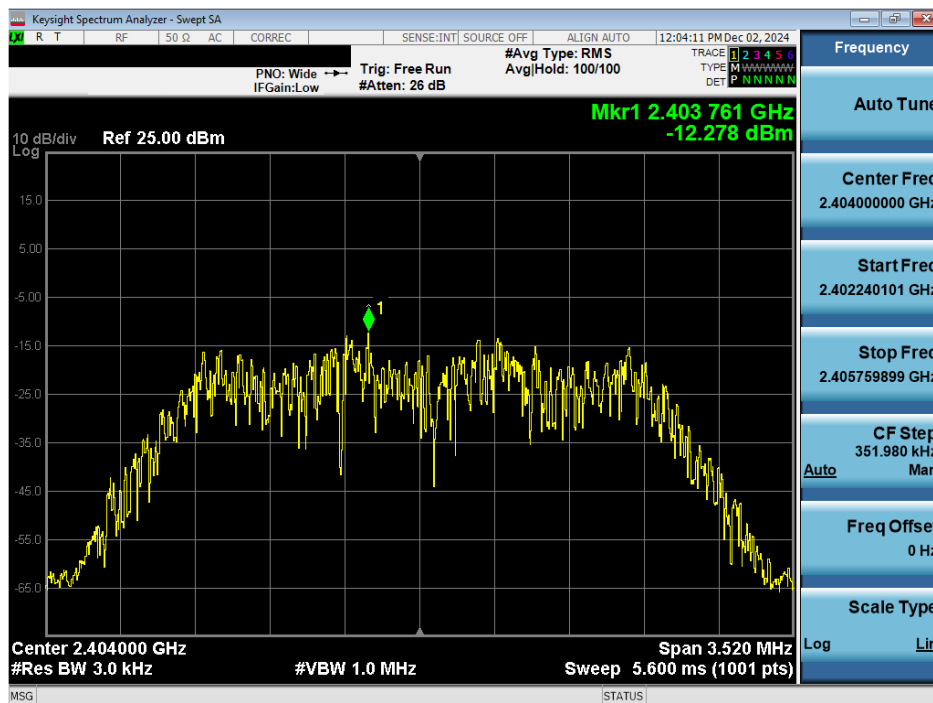


Plot 7-28. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 37 of 89

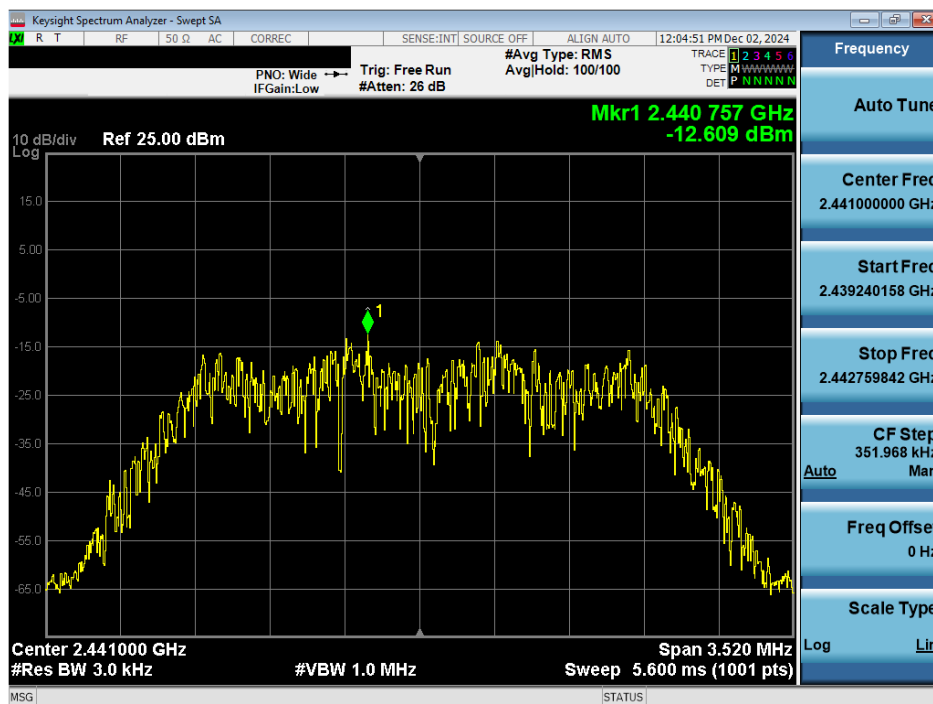

Plot 7-29. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

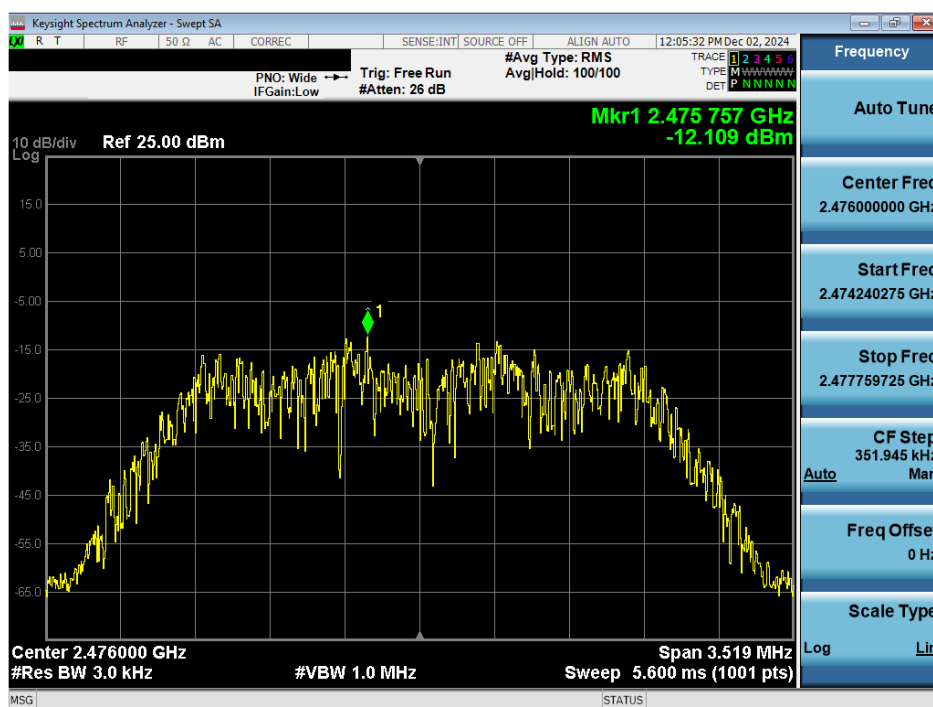


Plot 7-30. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 73)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 38 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

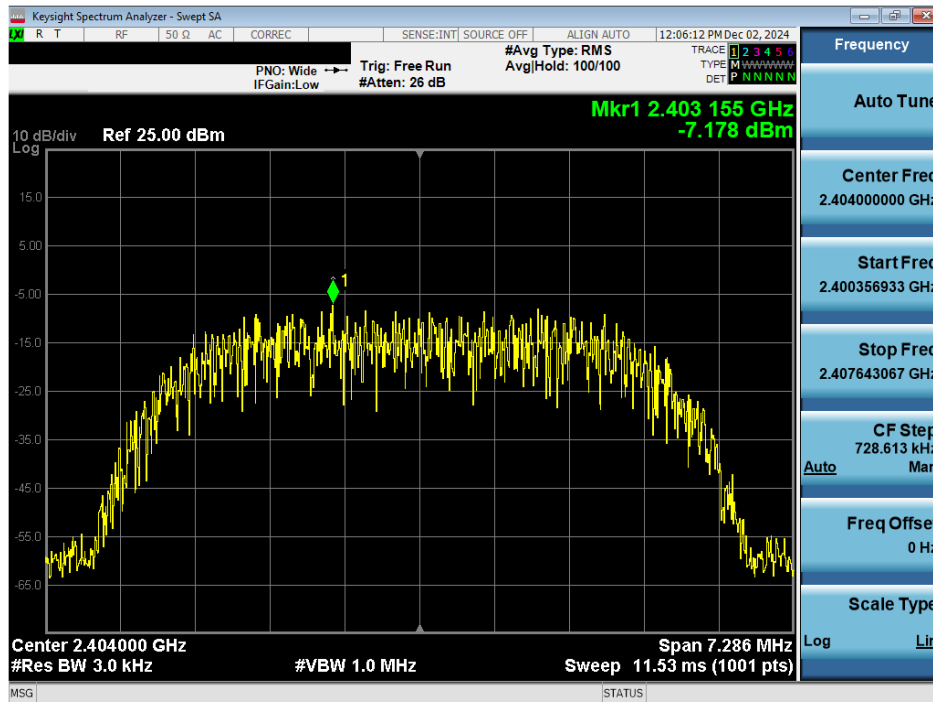

Plot 7-31. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

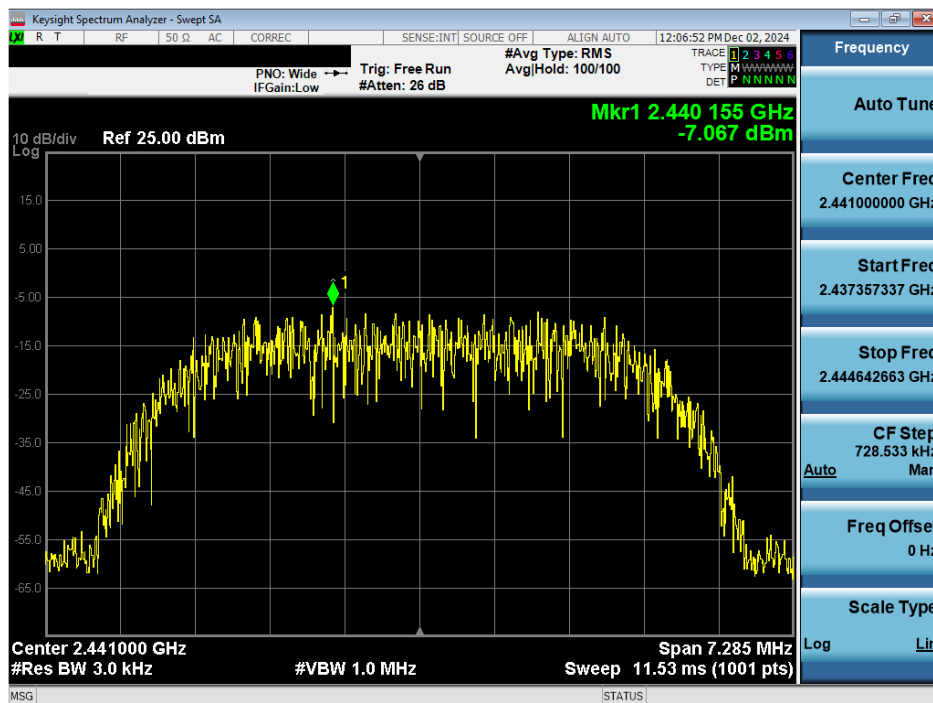


Plot 7-32. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 39 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

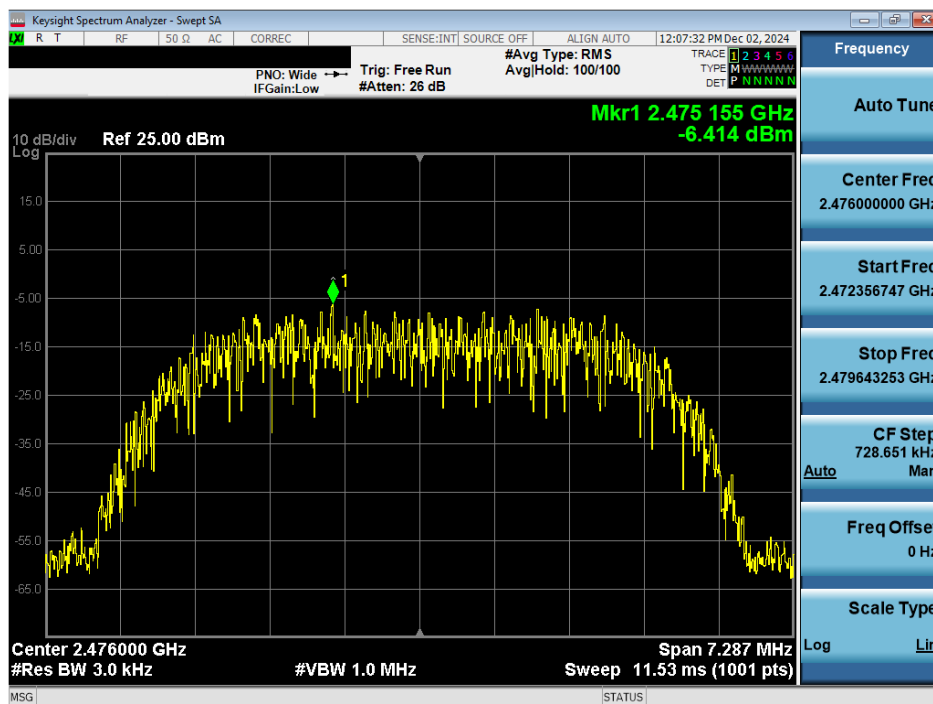

Plot 7-33. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

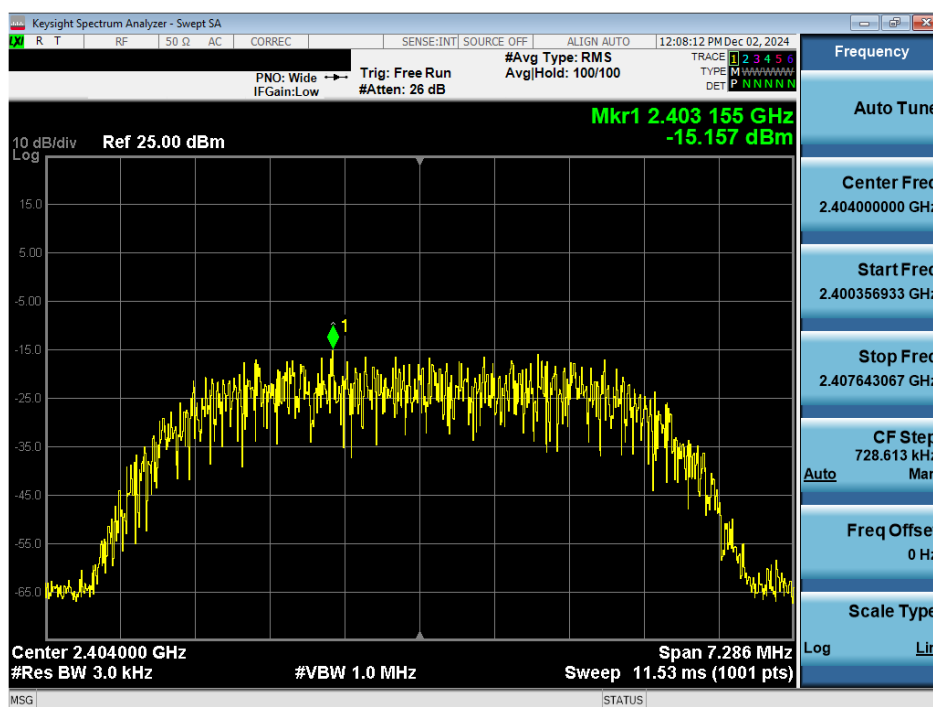


Plot 7-34. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 40 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

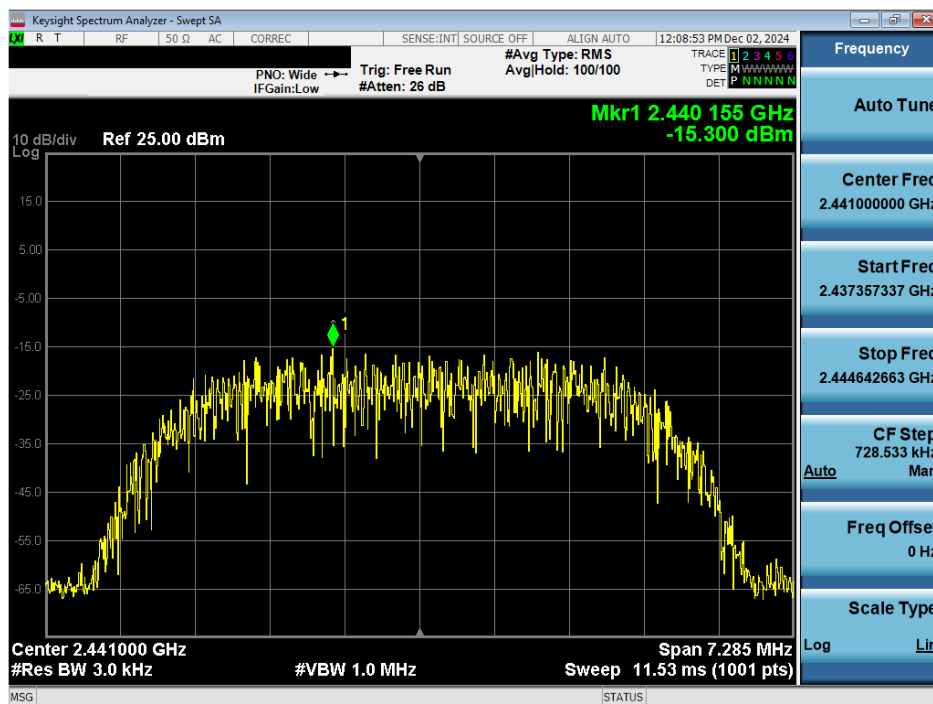

Plot 7-35. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

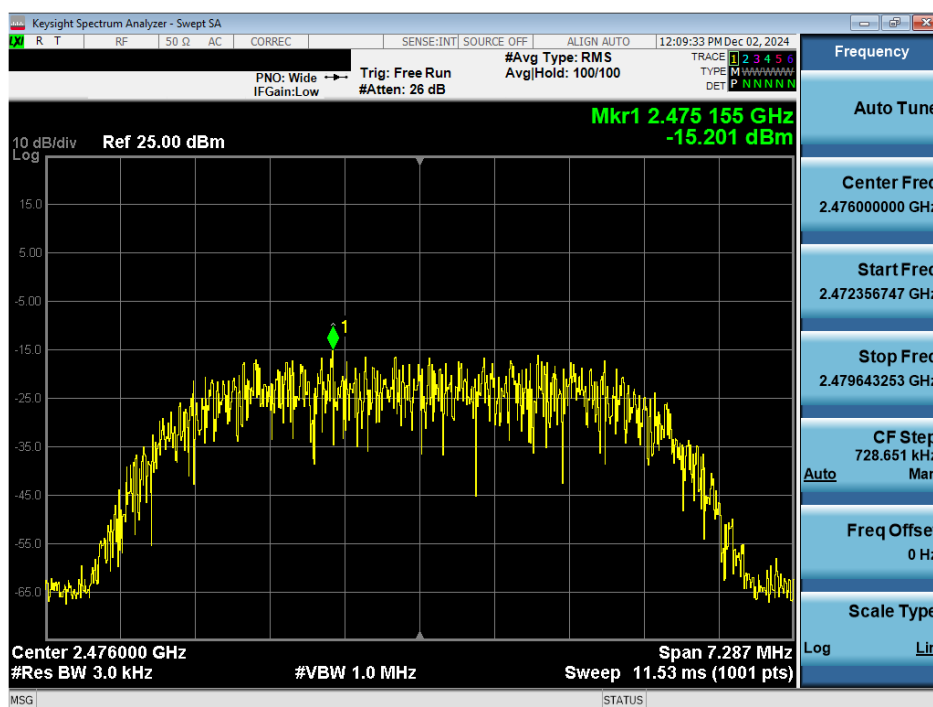

Plot 7-36. Power Spectral Density Plot Antenna WF2b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 41 of 89

## TxBF


Frequency [MHz]	Mode	Power Scheme	Channel No.	Antenna WF7b Power Density [dBm/3kHz]	Antenna WF2b Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2404	HDR4	ePA	1	-5.04	-4.64	-1.82	8.0	-9.82
2441	HDR4	ePA	38	-4.81	-4.10	-1.43	8.0	-9.43
2476	HDR4	ePA	73	-4.95	-3.95	-1.41	8.0	-9.41
2404	HDR4	iPA	1	-12.03	-12.29	-9.15	8.0	-17.15
2441	HDR4	iPA	38	-12.66	-12.66	-9.65	8.0	-17.65
2476	HDR4	iPA	73	-12.85	-12.15	-9.48	8.0	-17.48
2404	HDR8	ePA	1	-7.68	-6.84	-4.23	8.0	-12.23
2441	HDR8	ePA	38	-7.80	-6.79	-4.26	8.0	-12.26
2476	HDR8	ePA	73	-7.15	-6.84	-3.98	8.0	-11.98
2404	HDR8	iPA	1	-15.05	-15.35	-12.19	8.0	-20.19
2441	HDR8	iPA	38	-15.16	-15.34	-12.24	8.0	-20.24
2476	HDR8	iPA	73	-15.03	-15.25	-12.12	8.0	-20.12

**Table 7-12. Conducted Power Density Measurements TxBF**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 42 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

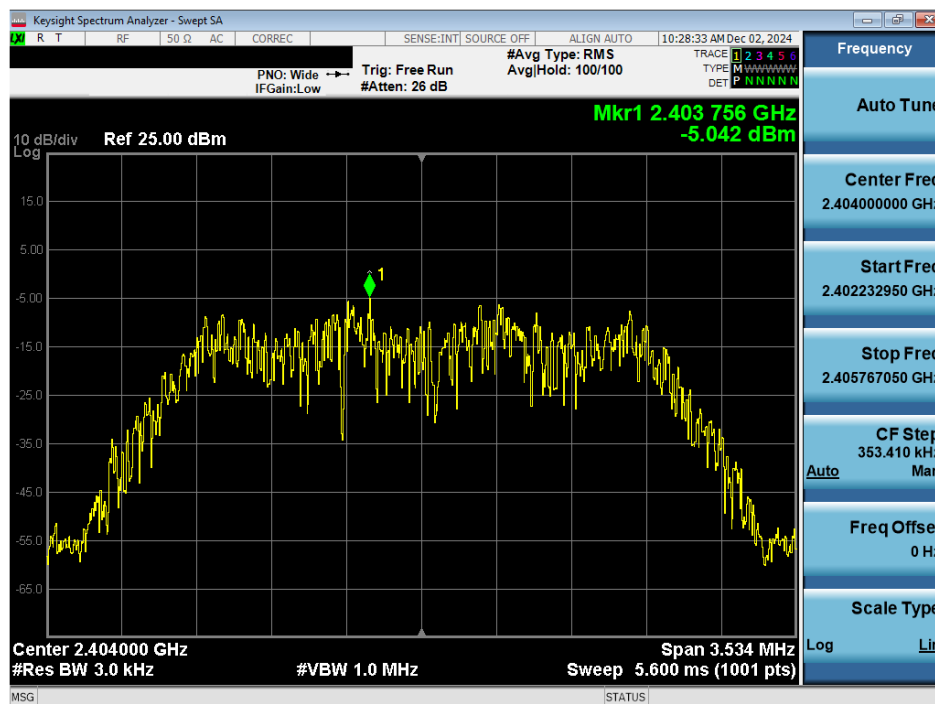

Plot 7-37. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

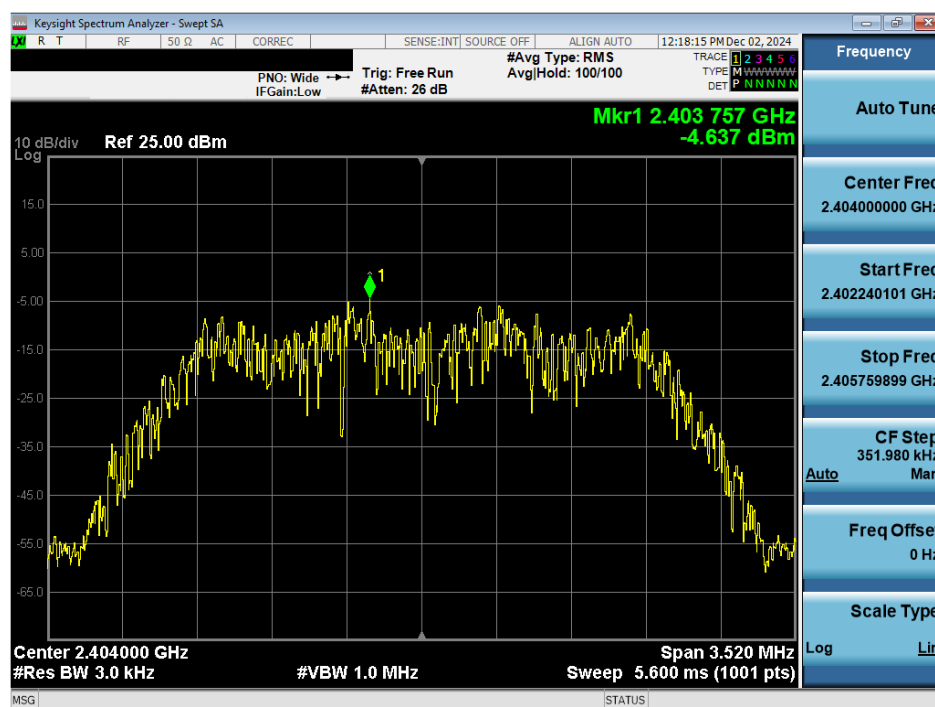


Plot 7-38. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 43 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

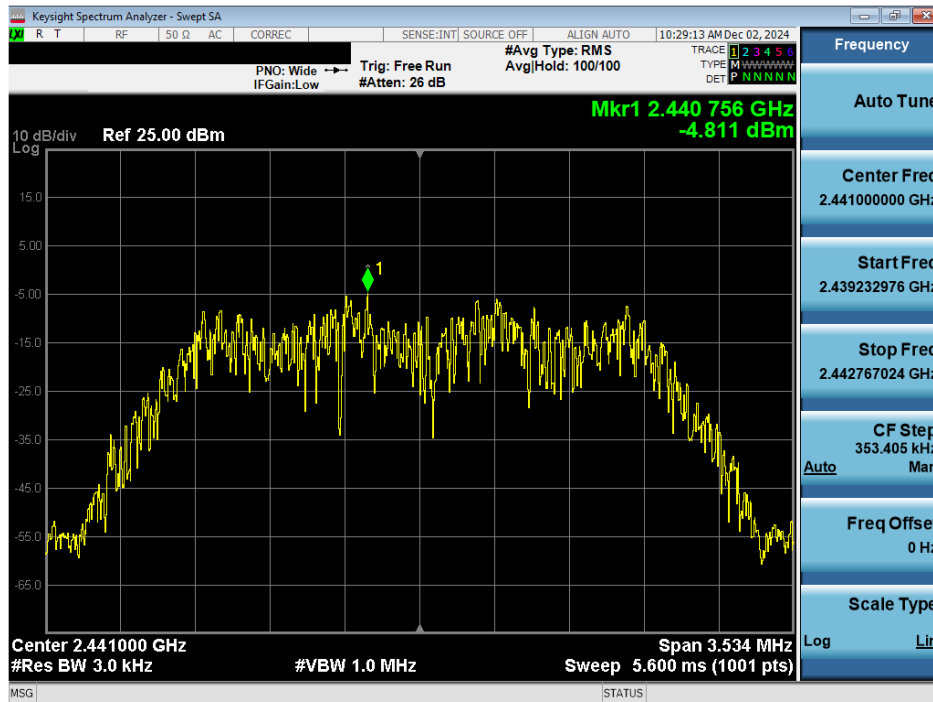

Plot 7-39. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

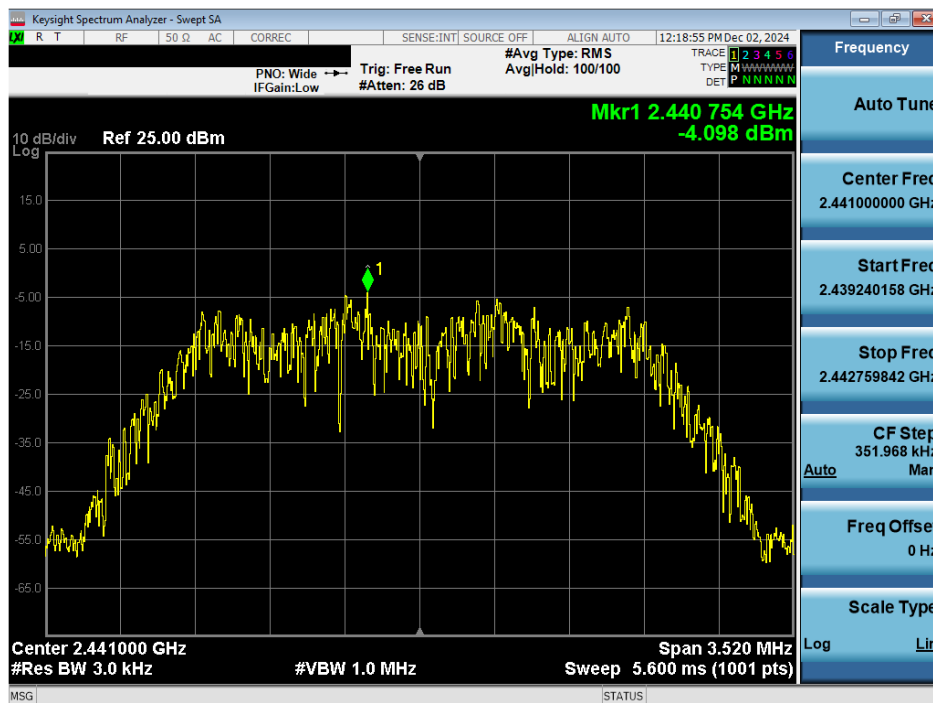


Plot 7-40. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 44 of 89


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



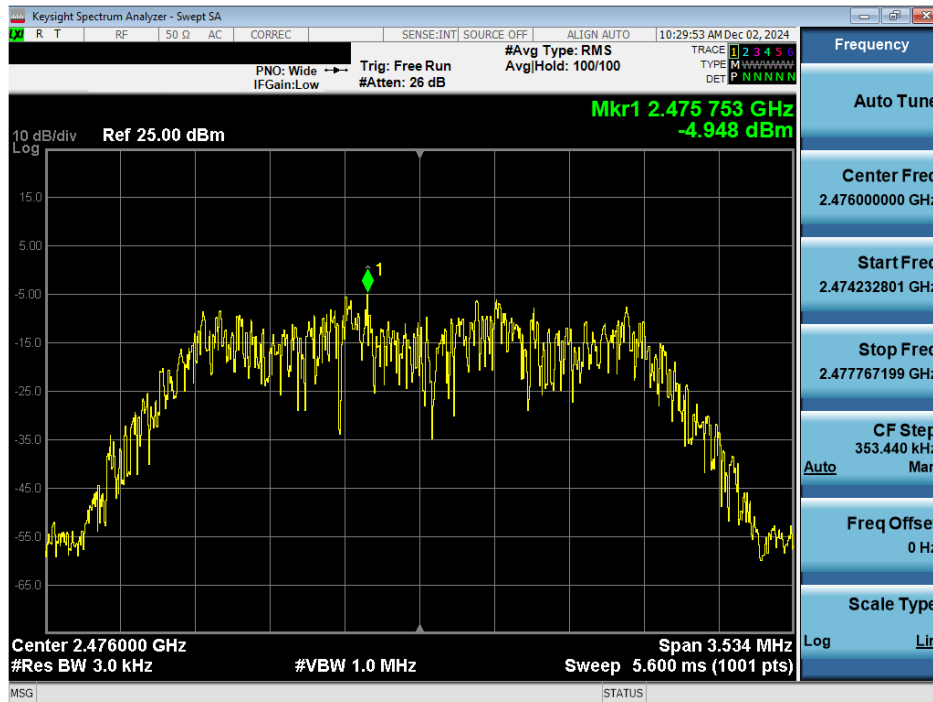


Plot 7-41. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

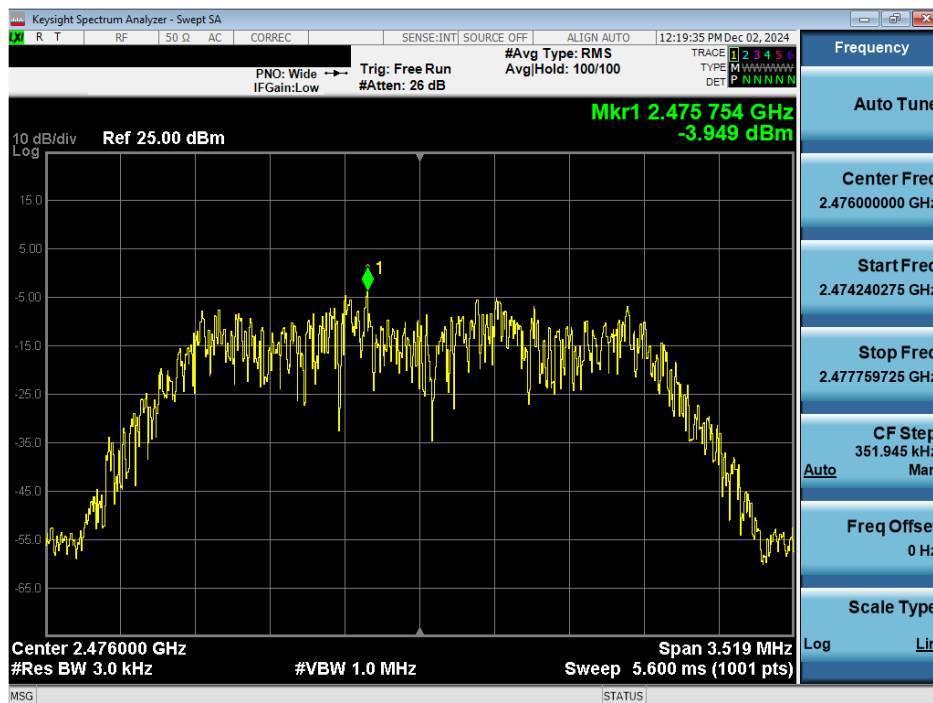


Plot 7-42. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR4), 4Mbps, ePA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 45 of 89

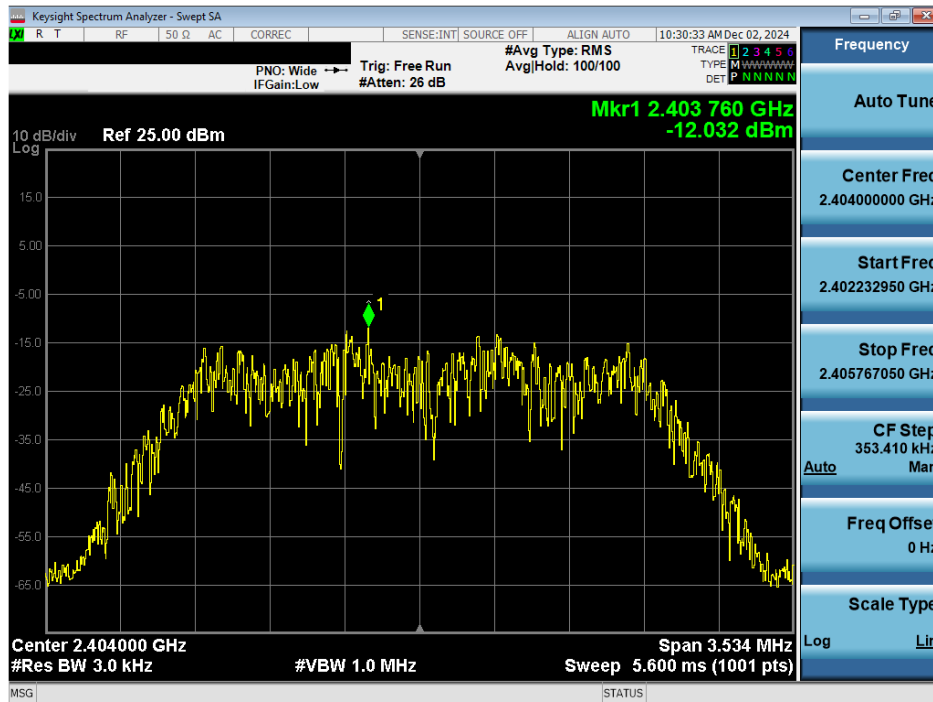

Plot 7-43. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

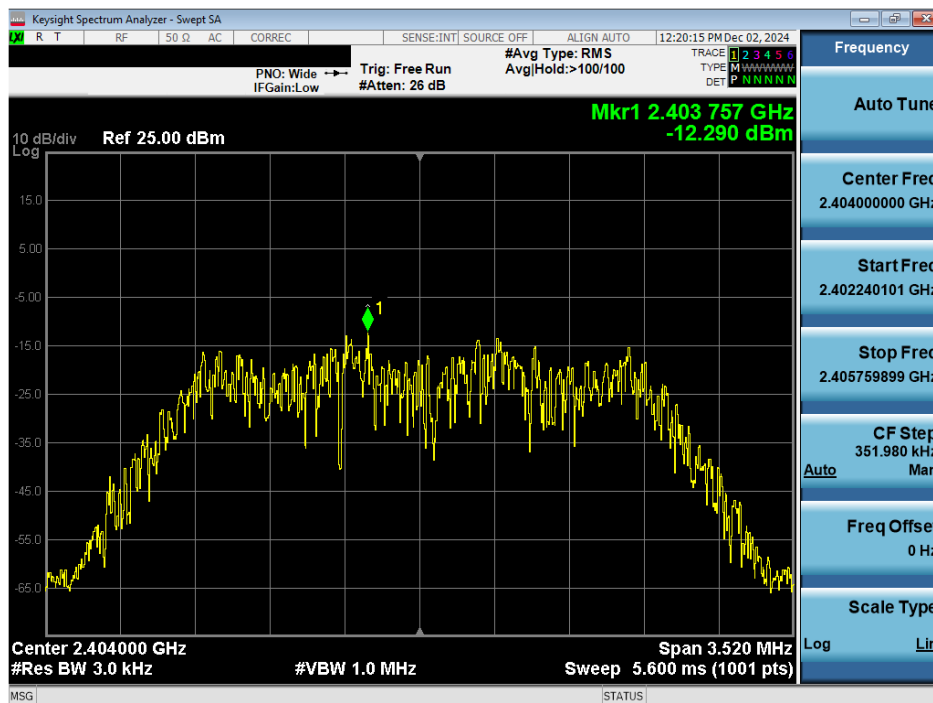


Plot 7-44. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 46 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

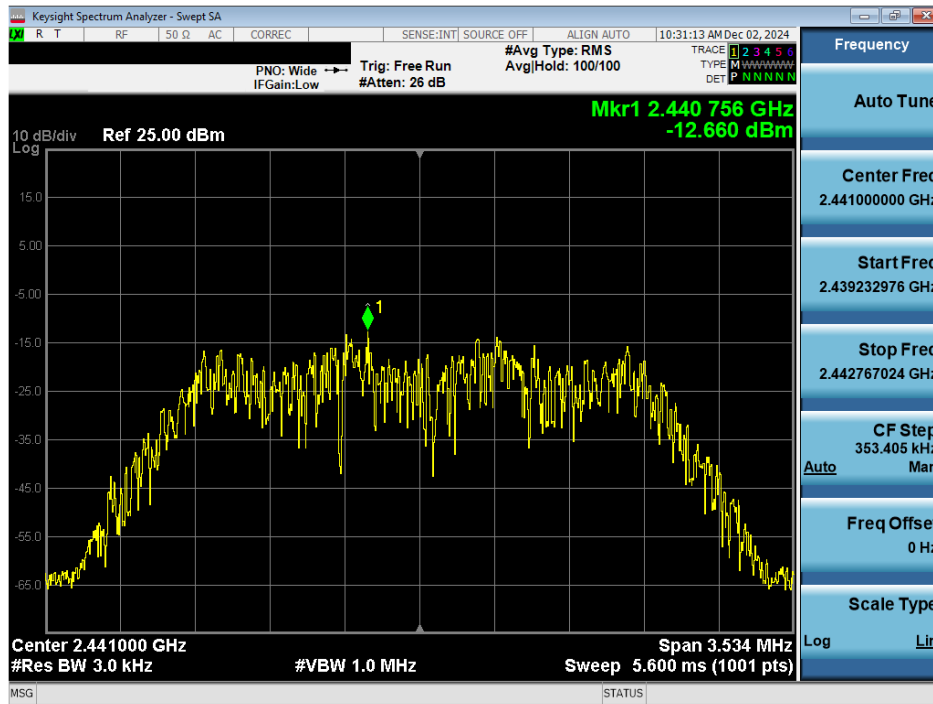


Plot 7-45. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

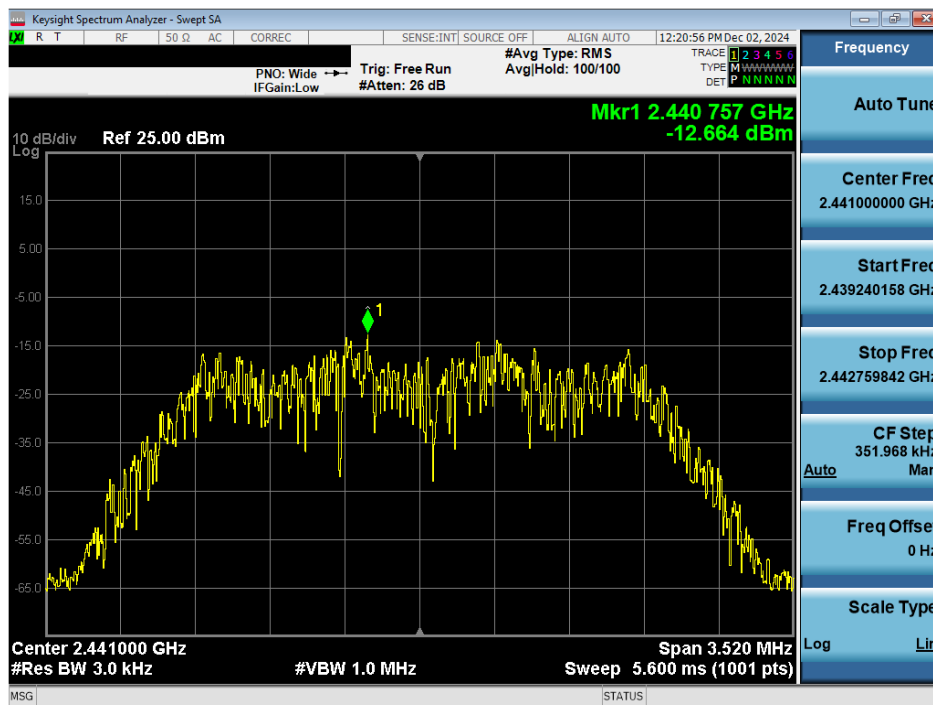


Plot 7-46. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 47 of 89

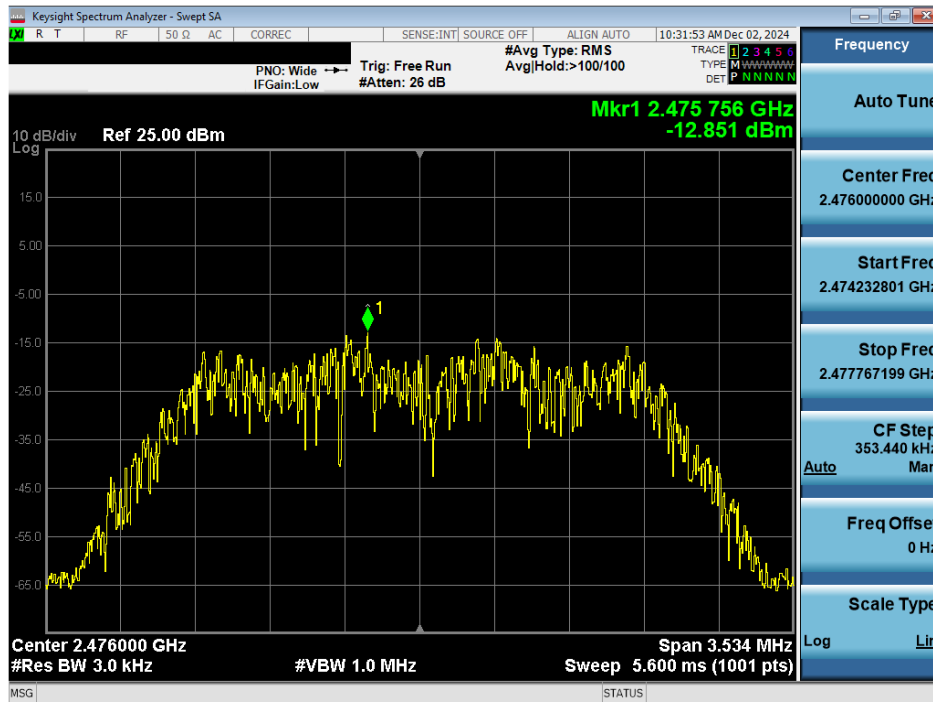


Plot 7-47. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 73)

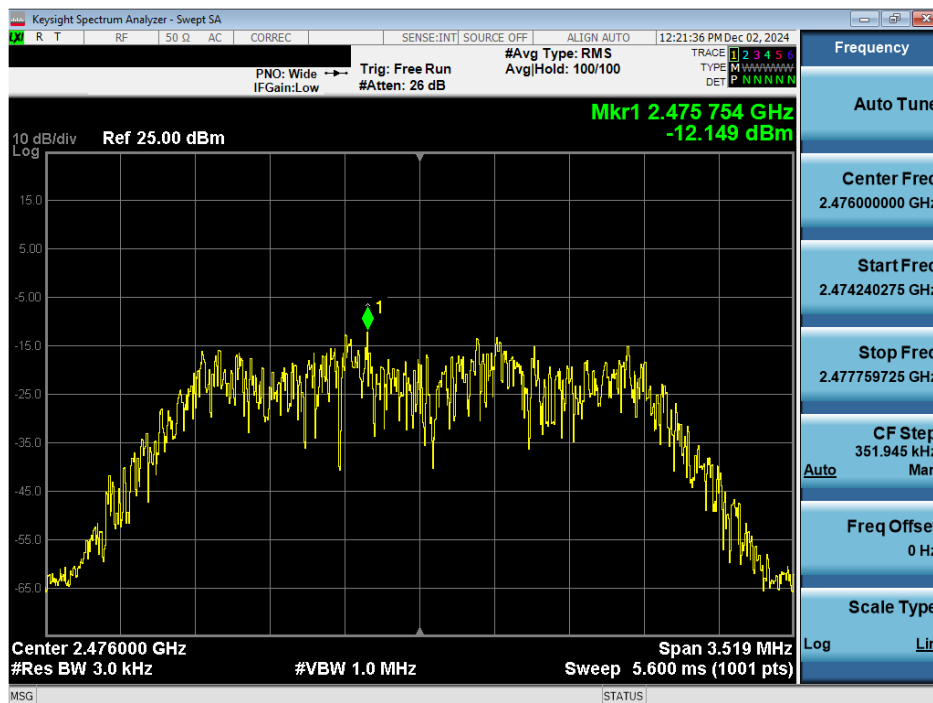


Plot 7-48. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR4), 4Mbps, iPA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 48 of 89

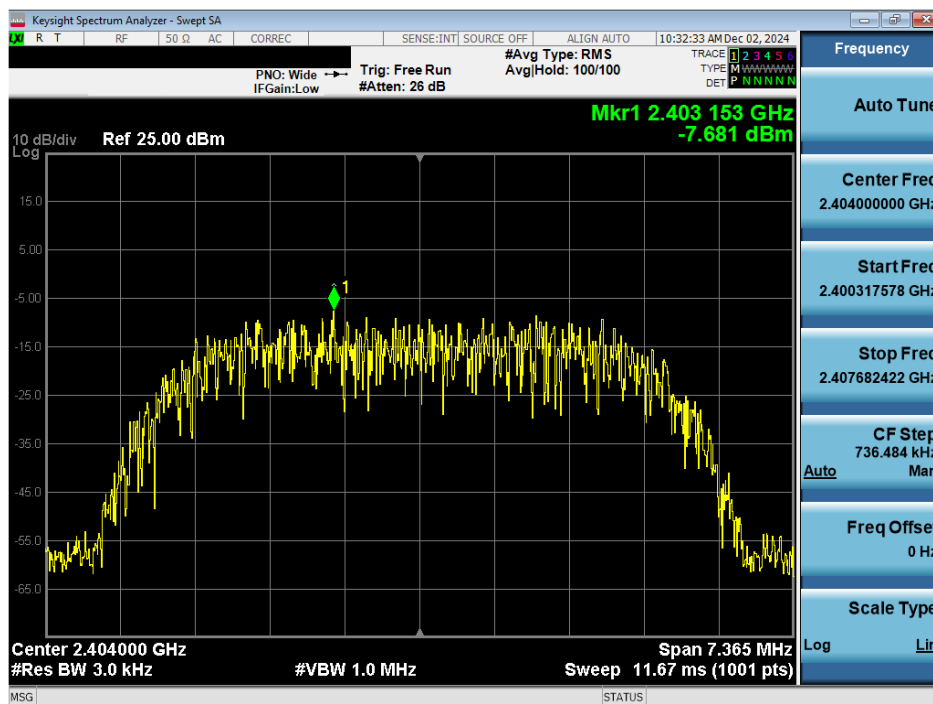

Plot 7-49. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

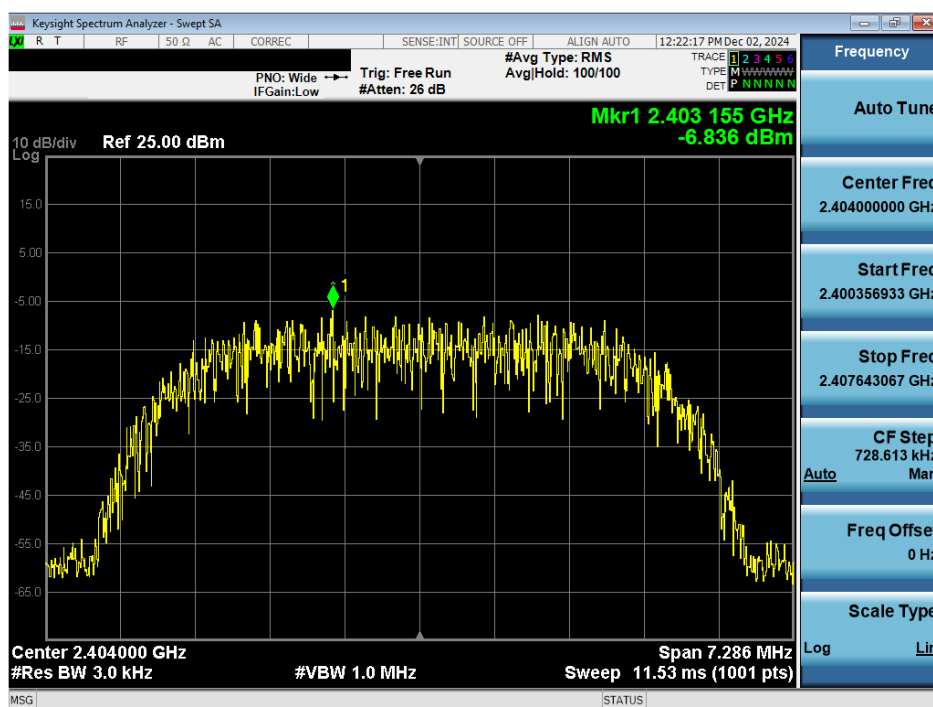


Plot 7-50. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 49 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

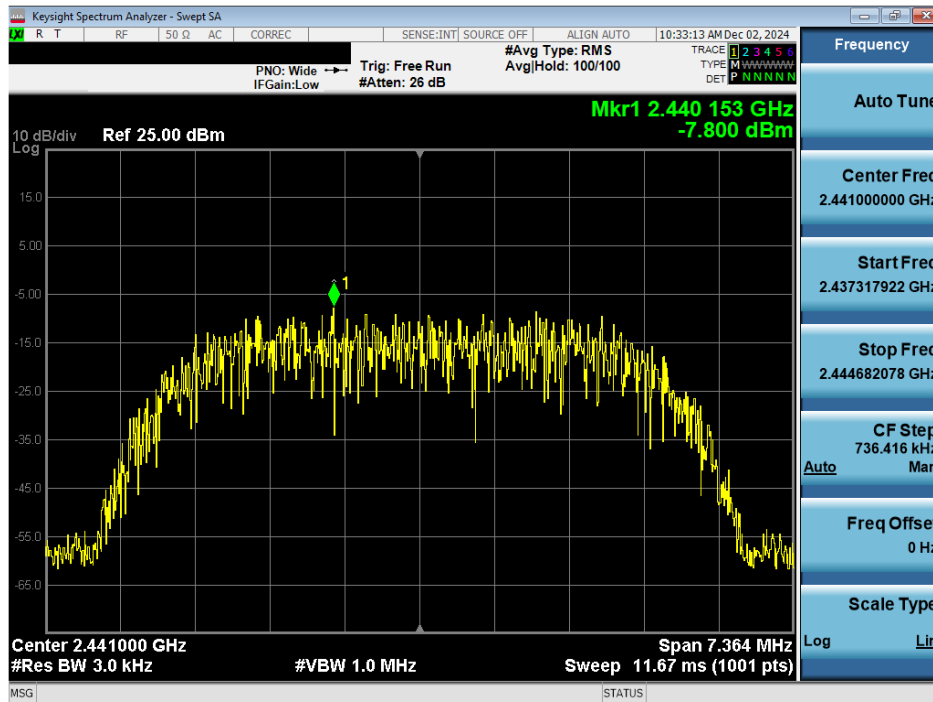

Plot 7-51. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

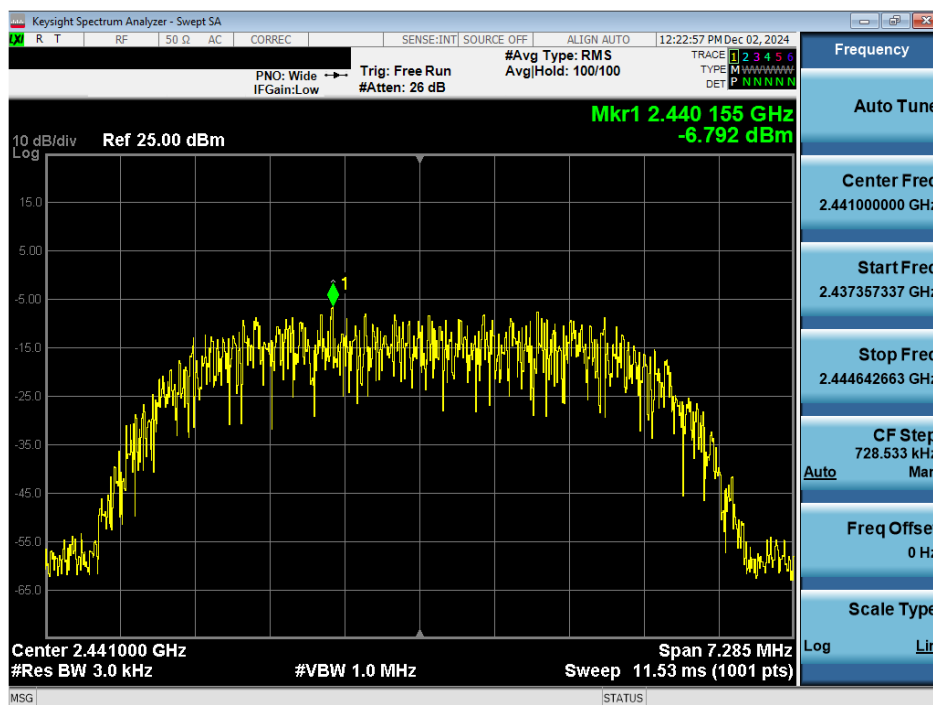


Plot 7-52. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 50 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

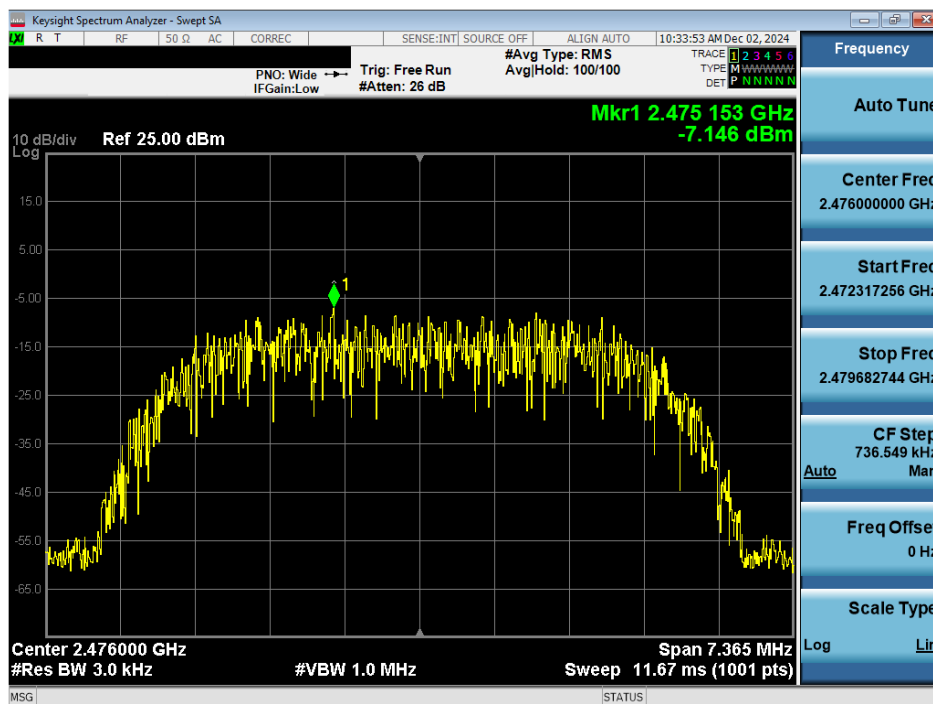

Plot 7-53. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)

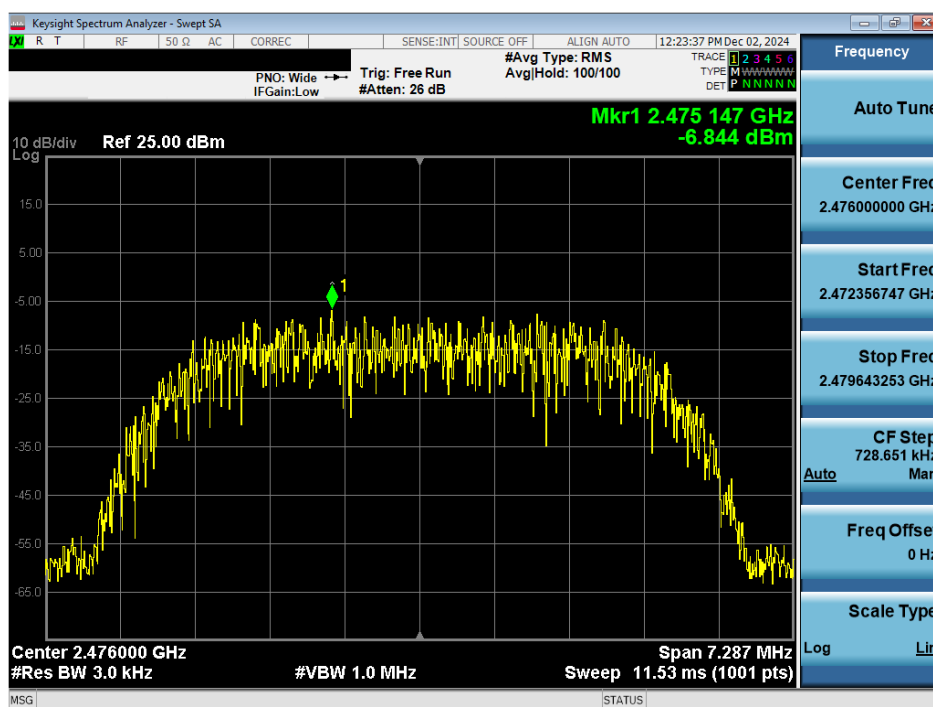


Plot 7-54. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR8), 8Mbps, ePA – Ch. 73)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 51 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

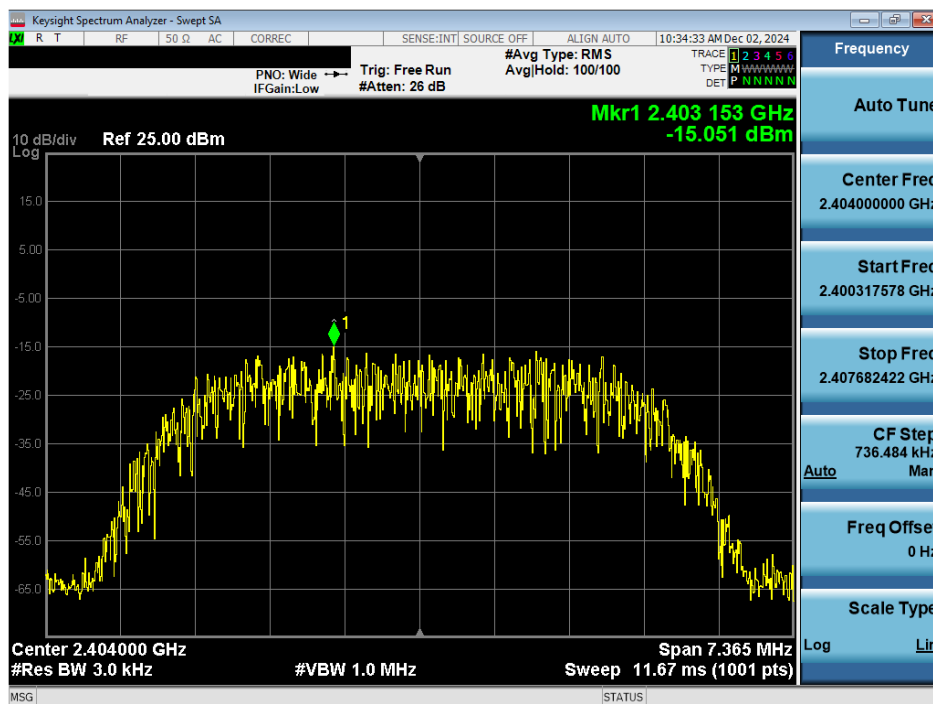


Plot 7-55. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)

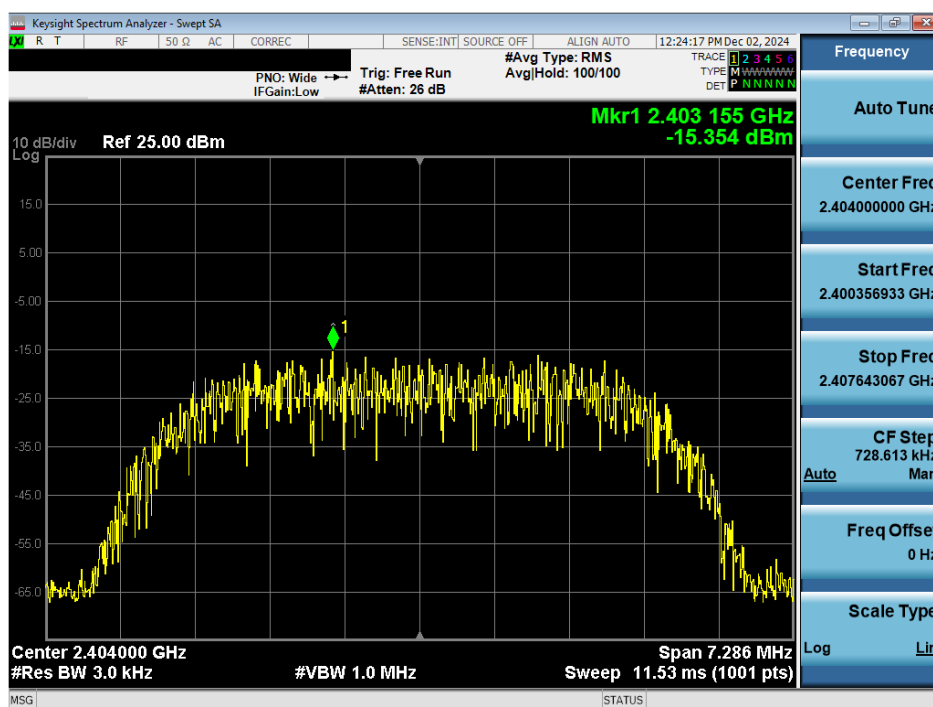


Plot 7-56. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 52 of 89



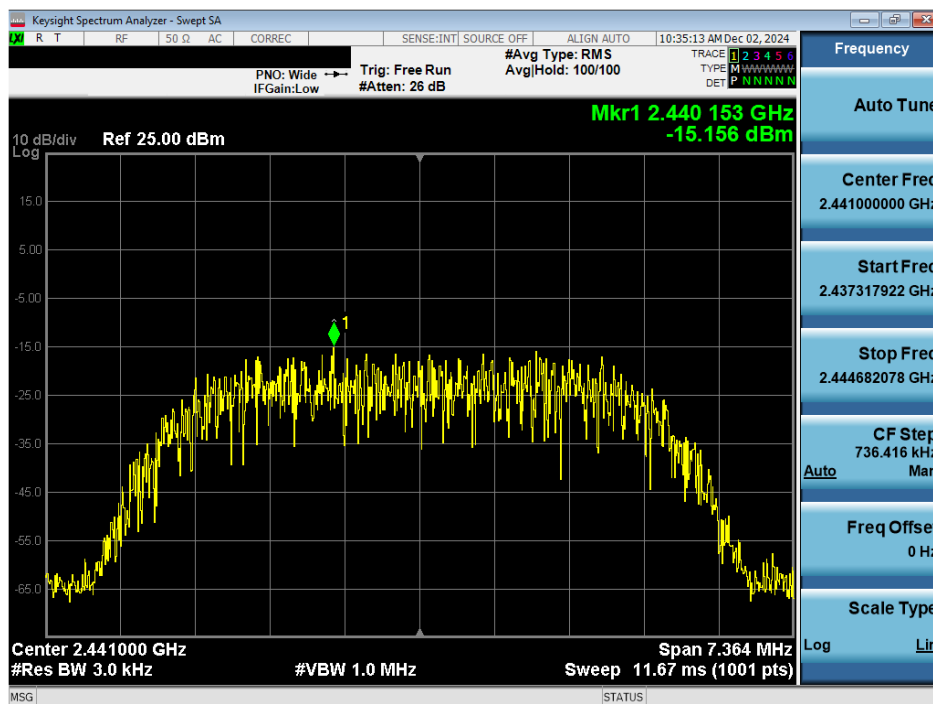

Plot 7-57. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

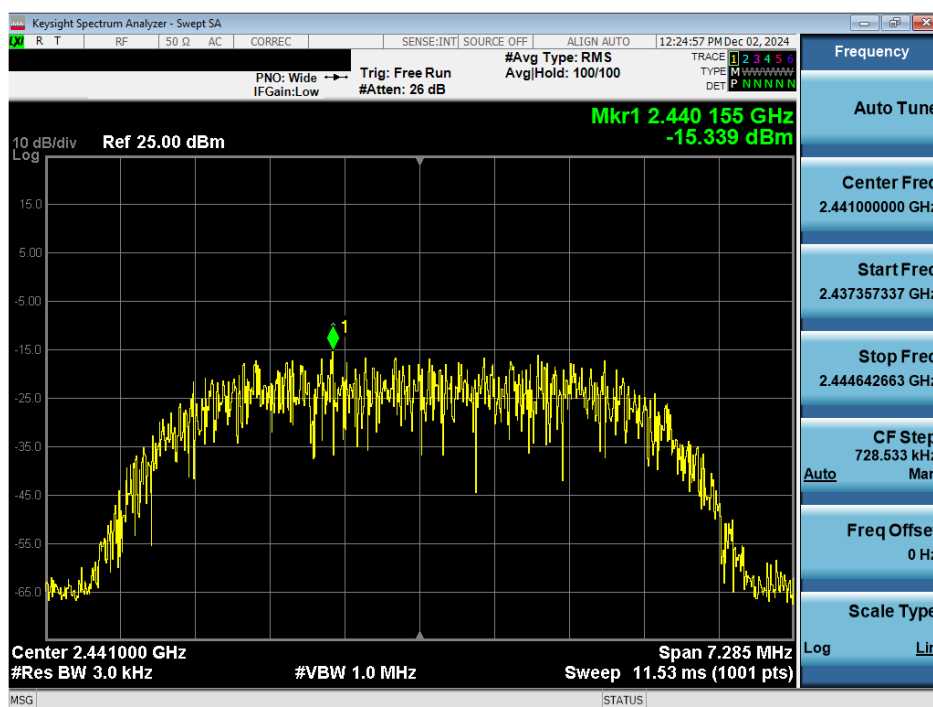


Plot 7-58. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 53 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

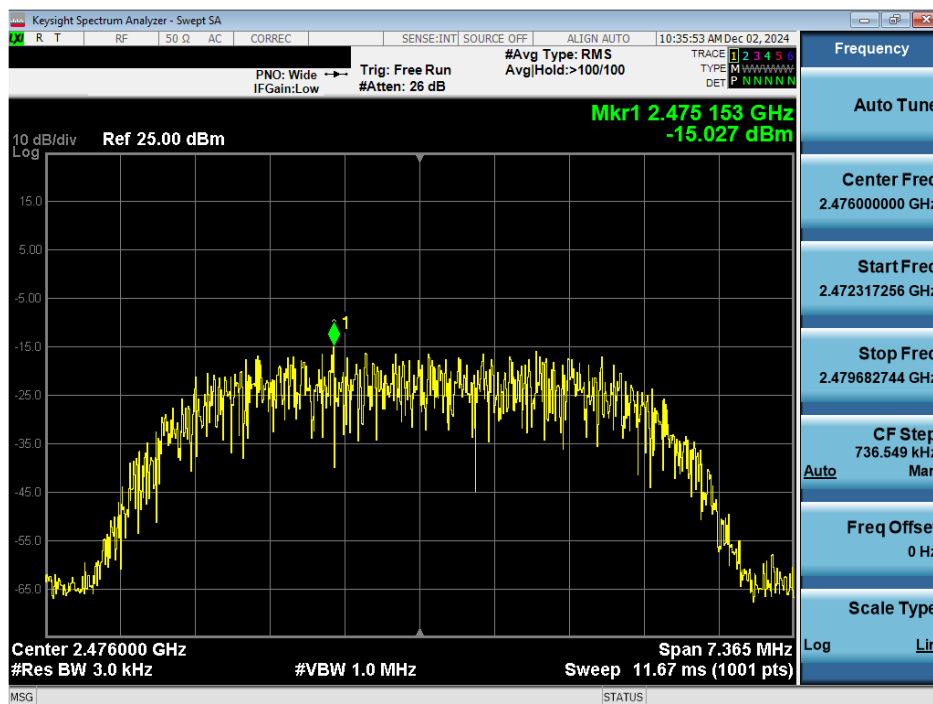

Plot 7-59. Power Spectral Density Plot TxBF Antenna WF7b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 73)

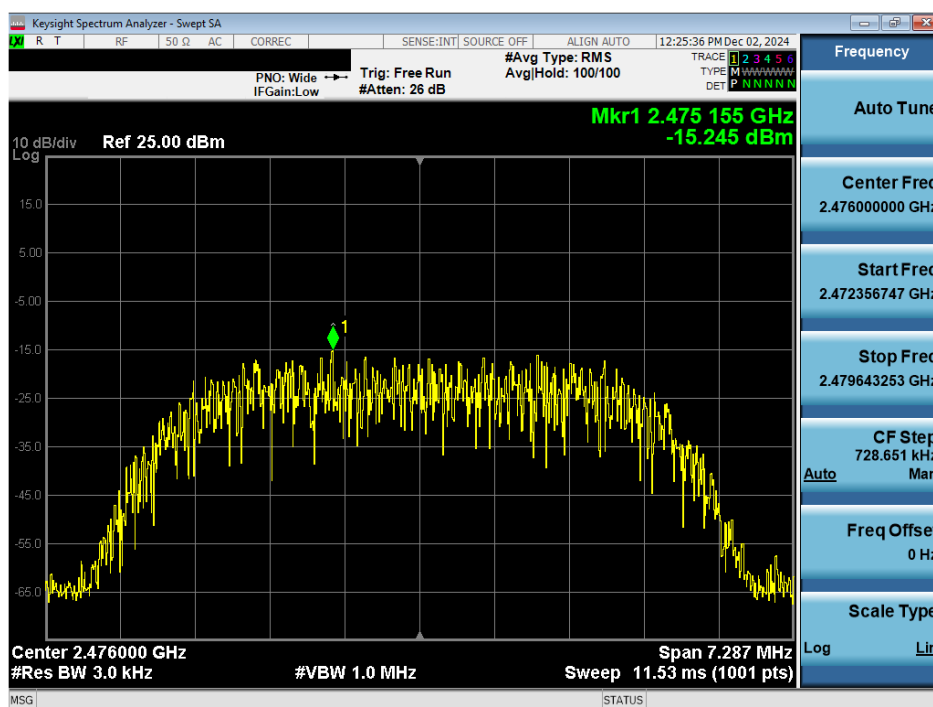

Plot 7-60. Power Spectral Density Plot TxBF Antenna WF2b (Bluetooth (HDR8), 8Mbps, iPA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 54 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

**Note:**

Per ANSI C63.10-2020 Subclause 14.6.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the  $n$ th antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10-2020 Subclause 14.5.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna WF7b and Antenna WF2b were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample TxBF Calculation:**

At 2404MHz the average conducted power spectral density was measured to be -5.04 dBm for Antenna WF7b and -4.64 dBm for Antenna WF2b.

$$\text{Antenna WF7b} + \text{Antenna WF2b} = \text{TxBF}$$

$$(-5.04\text{dBm} + -4.64 \text{ dBm}) = (0.313 \text{ mW} + 0.344 \text{ mW}) = 0.657 \text{ mW} = -1.82 \text{ dBm}$$

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 55 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.5 Conducted Authorized Band Edge

**§15.247(d); RSS-247 [5.5]**

### Test Overview and Limit

For the following out of band conducted spurious emissions plots at the band edge, the EUT was set to transmit at maximum power with the largest packet size available. These settings produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth.***

### Test Procedure Used

ANSI C63.10-2020 – Subclause 11.11.3

KDB 558074 D01 v05r02 – Section 8.7.2

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW  $\geq 3 \times$  RBW
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 56 of 89


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Antenna WF7b

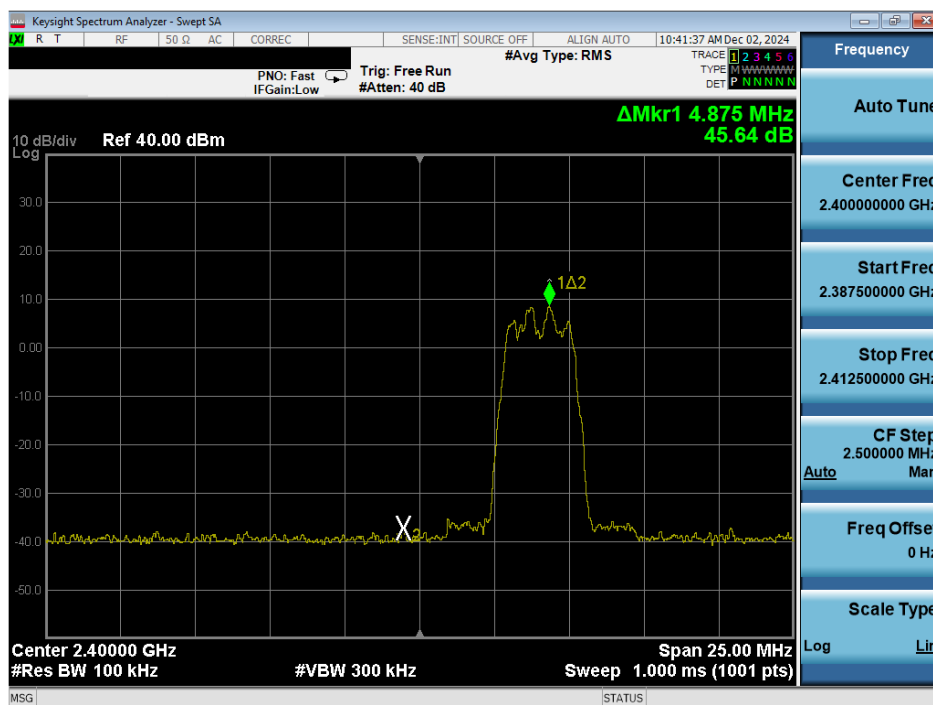

Plot 7-61. Band Edge Plot Antenna WF7b (Bluetooth (HDR4), ePA – Ch. 1)

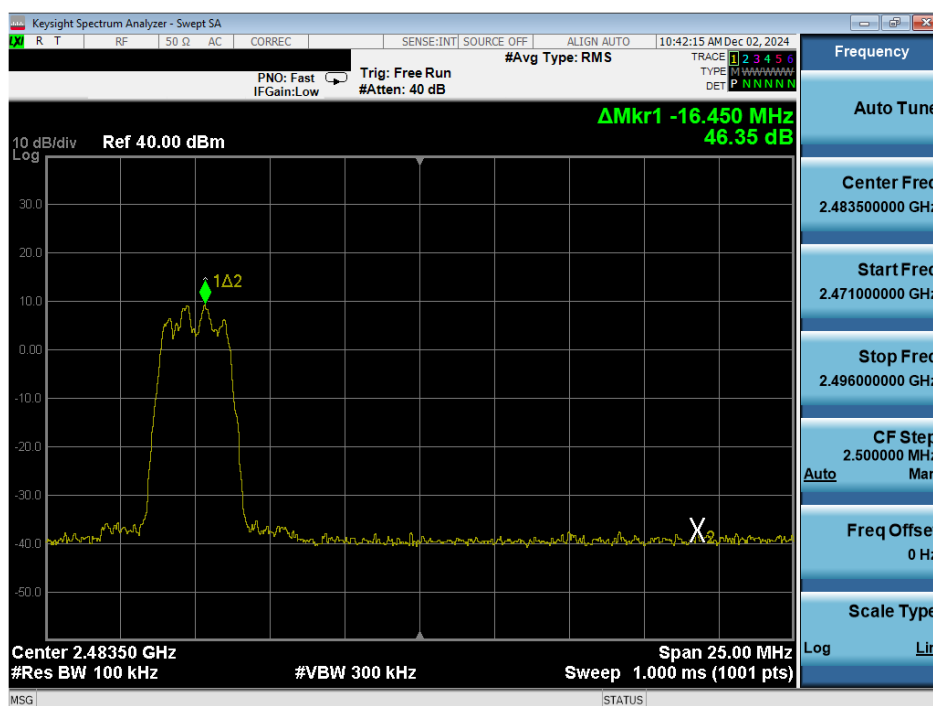


Plot 7-62. Band Edge Plot Antenna WF7b (Bluetooth (HDR4), ePA – Ch. 73)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 57 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

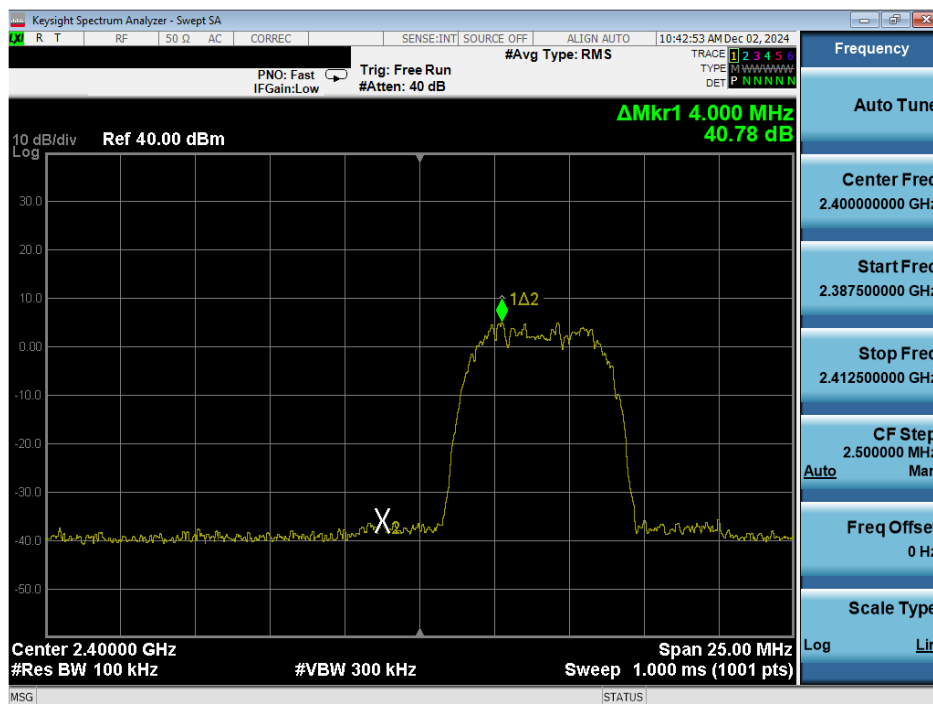

Plot 7-63. Band Edge Plot Antenna WF7b (Bluetooth (HDR8), ePA – Ch. 1)

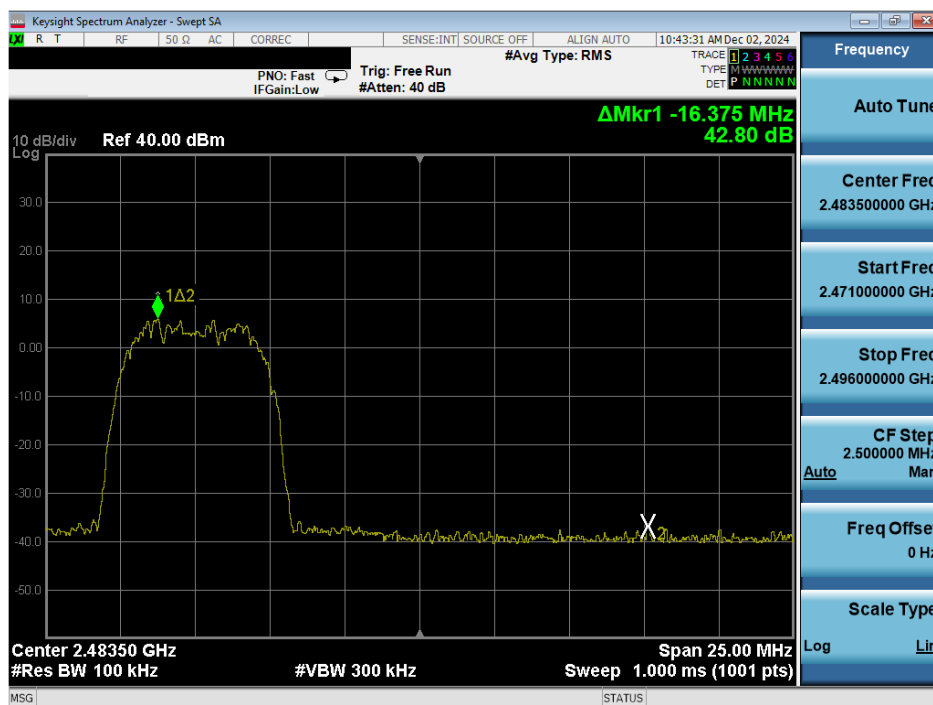


Plot 7-64. Band Edge Plot Antenna WF7b (Bluetooth (HDR8), ePA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 58 of 89


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Antenna WF2b

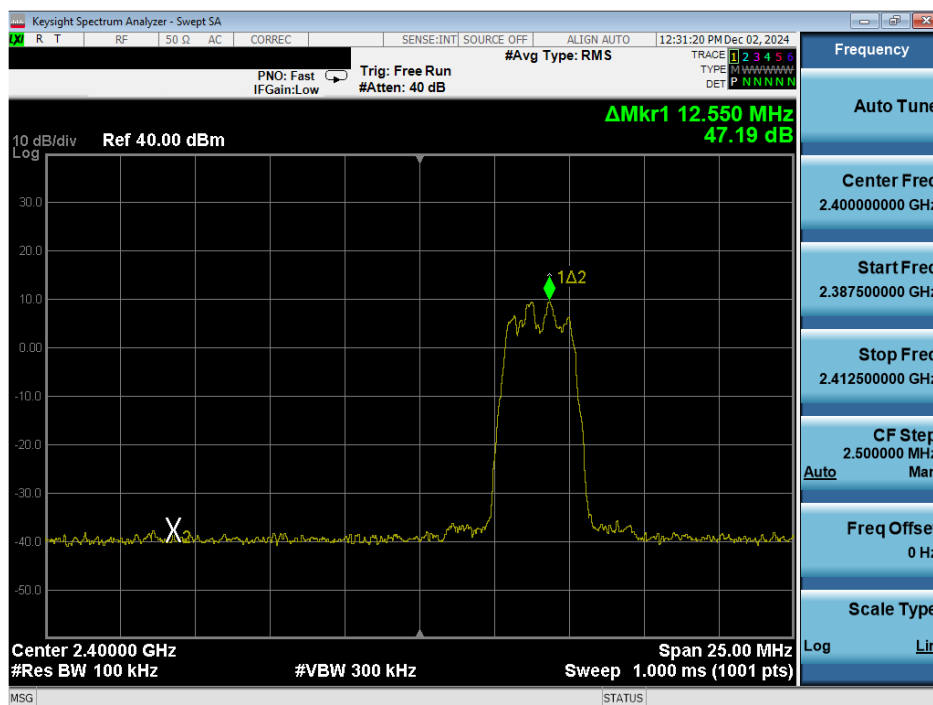

Plot 7-65. Band Edge Plot Antenna WF2b (Bluetooth (HDR4), ePA – Ch. 1)

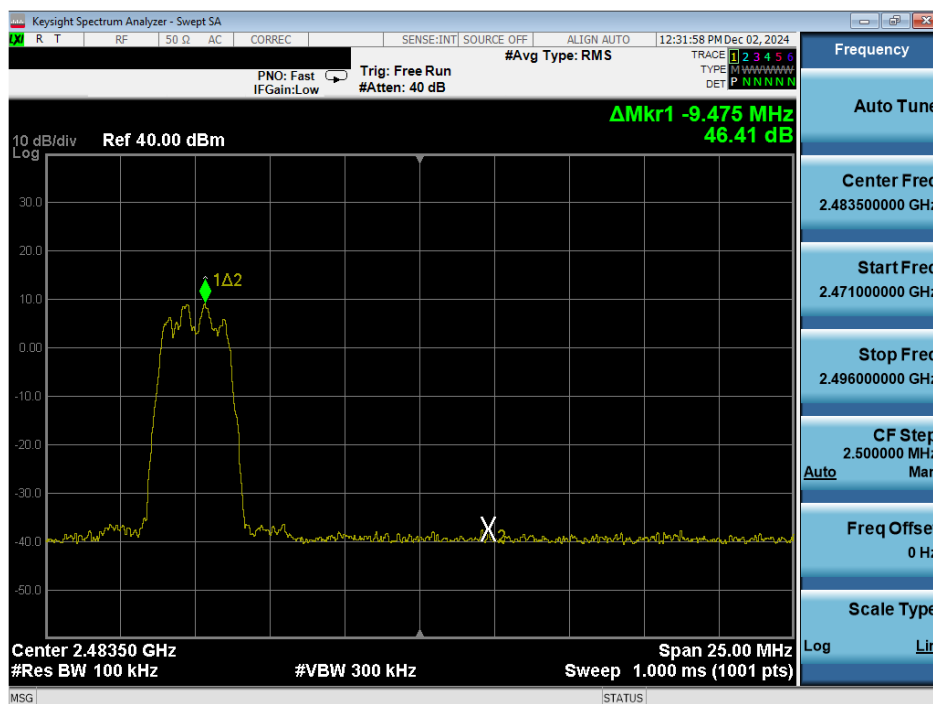


Plot 7-66. Band Edge Plot Antenna WF2b (Bluetooth (HDR4), ePA – Ch. 73)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 59 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

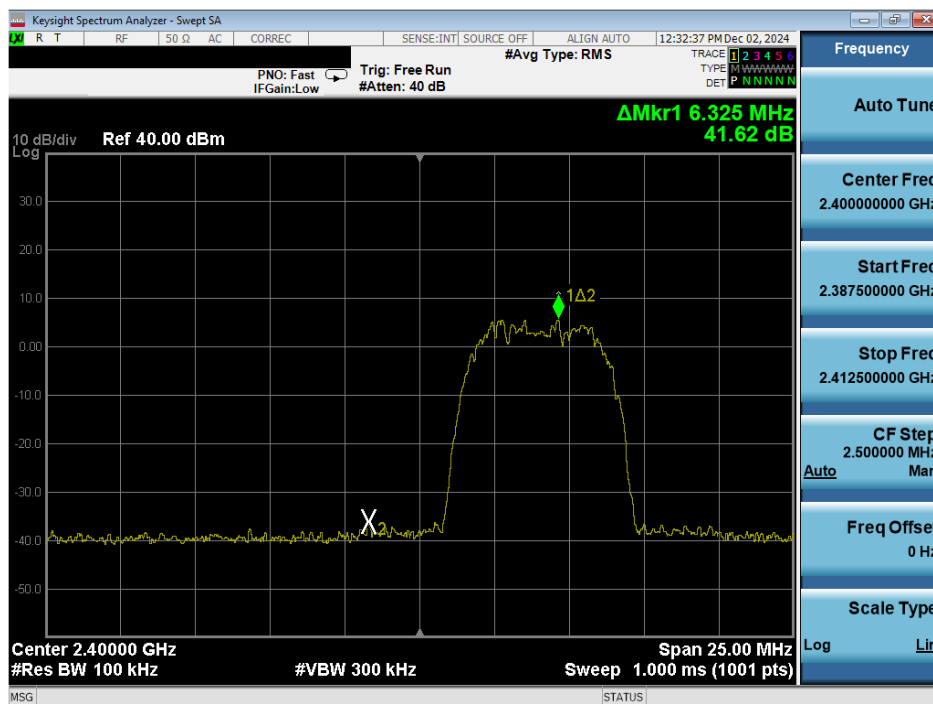

Plot 7-67. Band Edge Plot Antenna WF2b (Bluetooth (HDR8), ePA – Ch. 1)

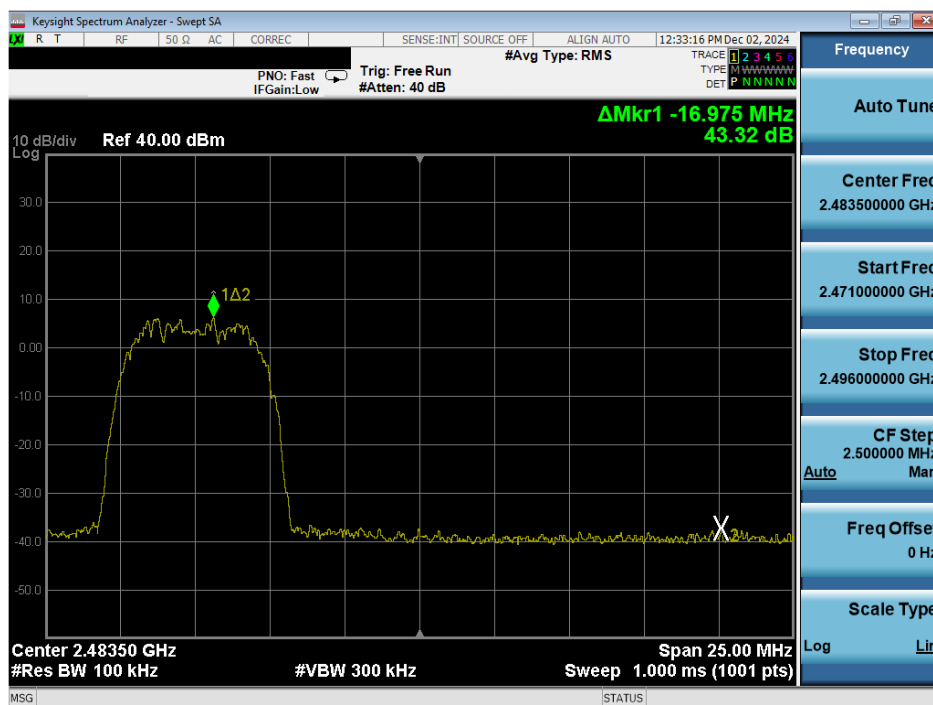

Plot 7-68. Band Edge Plot Antenna WF2b (Bluetooth (HDR8), ePA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 60 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 7.6 Conducted Spurious Emissions

**§15.247(d); RSS-247 [5.5]**

### Test Overview and Limit

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

***The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 8.5 of KDB 558074 D01 v05r02 and Subclause 11.11 of ANSI C63.10-2020.***

### Test Procedure Used

ANSI C63.10-2020 – Subclause 11.11.3  
KDB 558074 D01 v05r02 – Section 8.5  
ANSI C63.10-2020 – Subclause 14.5.3  
KDB 662911 D01 v02r01 – Section E(3)b)

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-5. Test Instrument & Measurement Setup**

FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 61 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


## **Test Notes**

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 62 of 89

V 10.6 09/14/2023

## Antenna WF7b

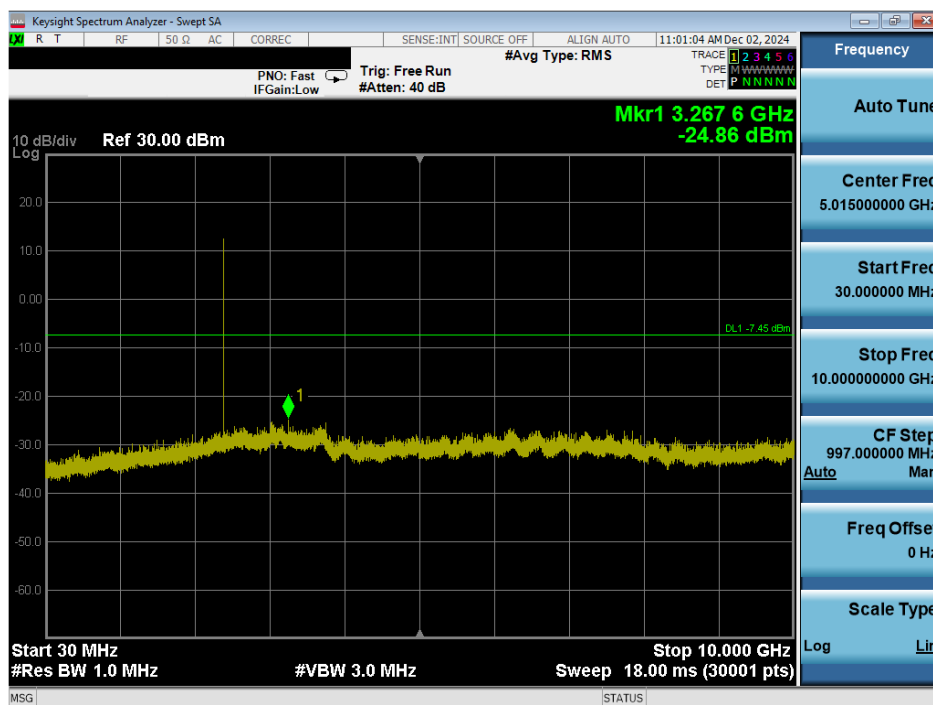


Plot 7-69. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

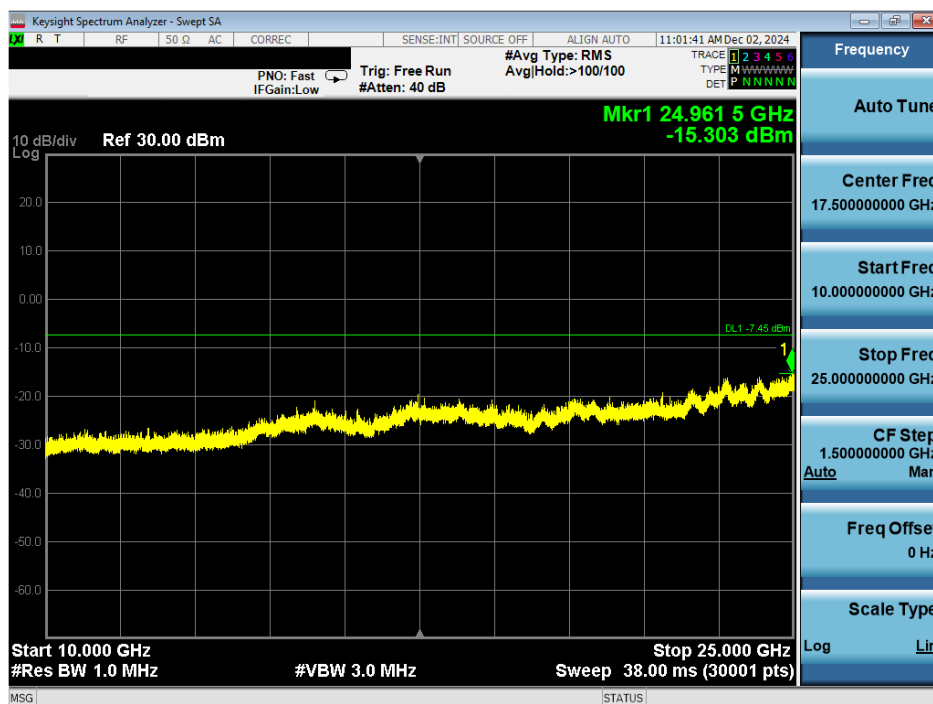


Plot 7-70. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 63 of 89

V 10.6 09/14/2023

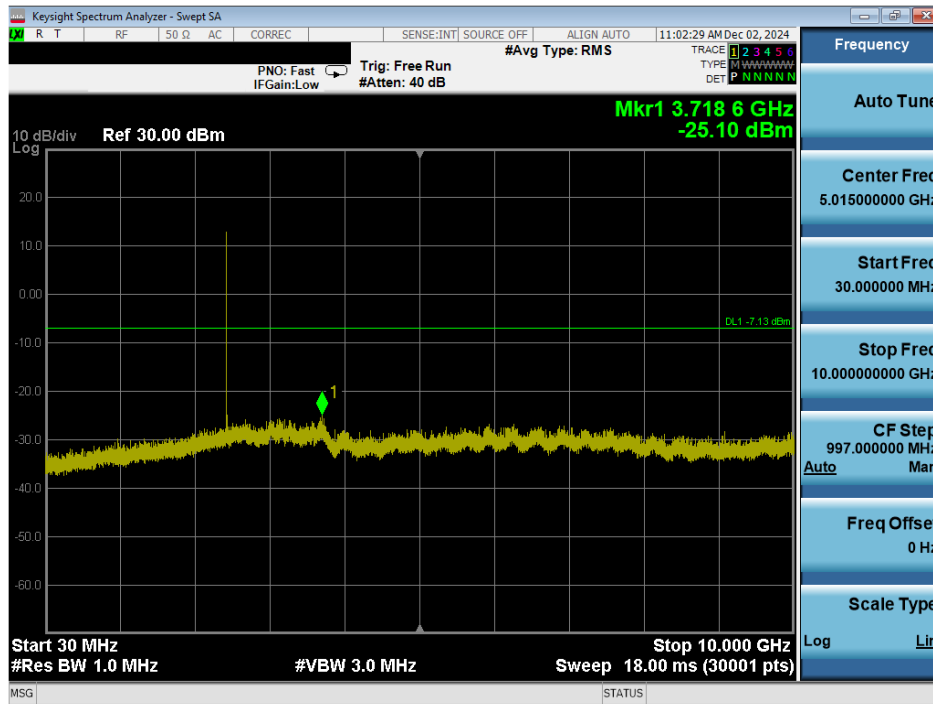

Plot 7-71. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

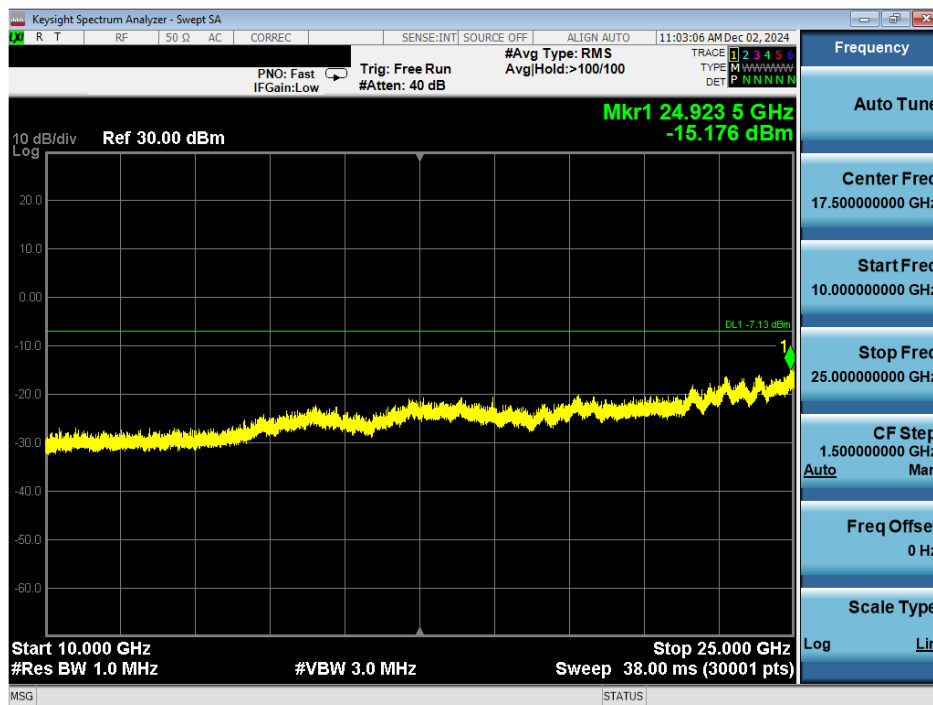


Plot 7-72. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 64 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

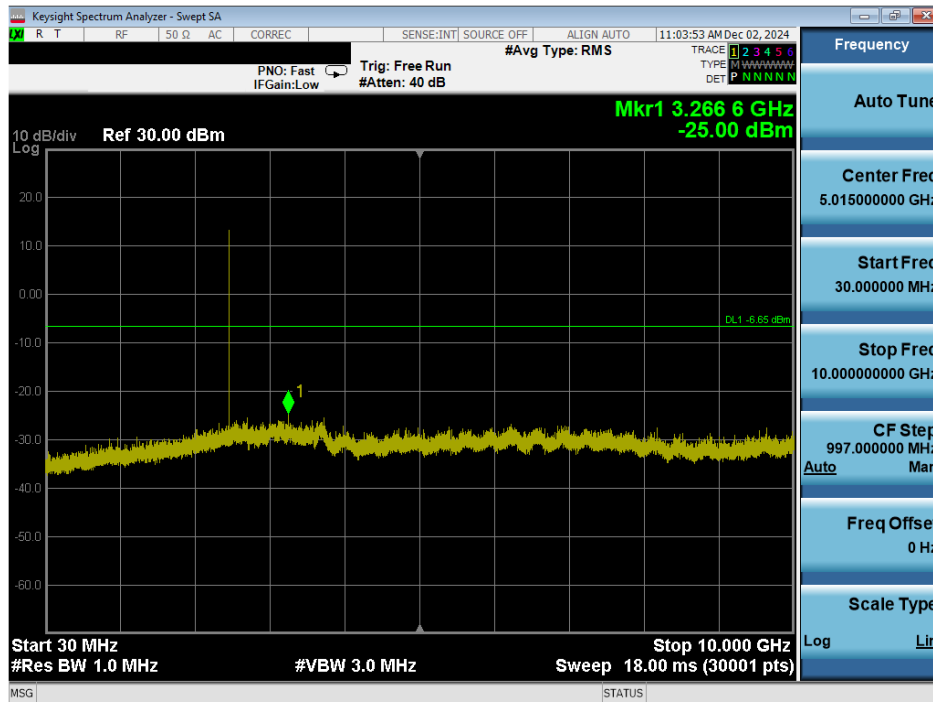

Plot 7-73. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

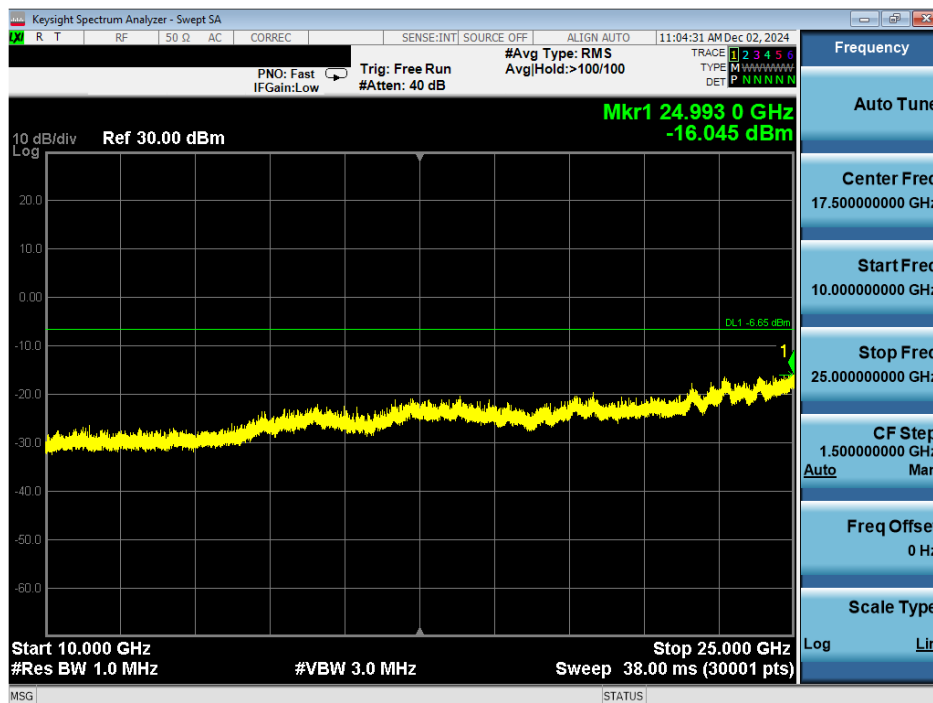


Plot 7-74. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 65 of 89


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Antenna WF2b

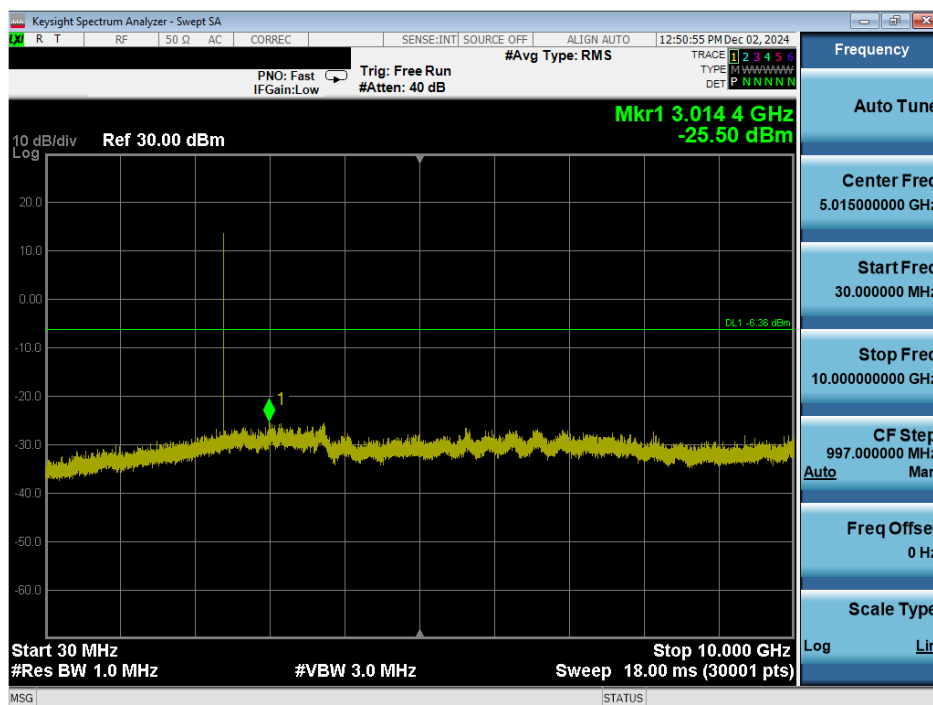


Plot 7-75. Conducted Spurious Plot Antenna WF2b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

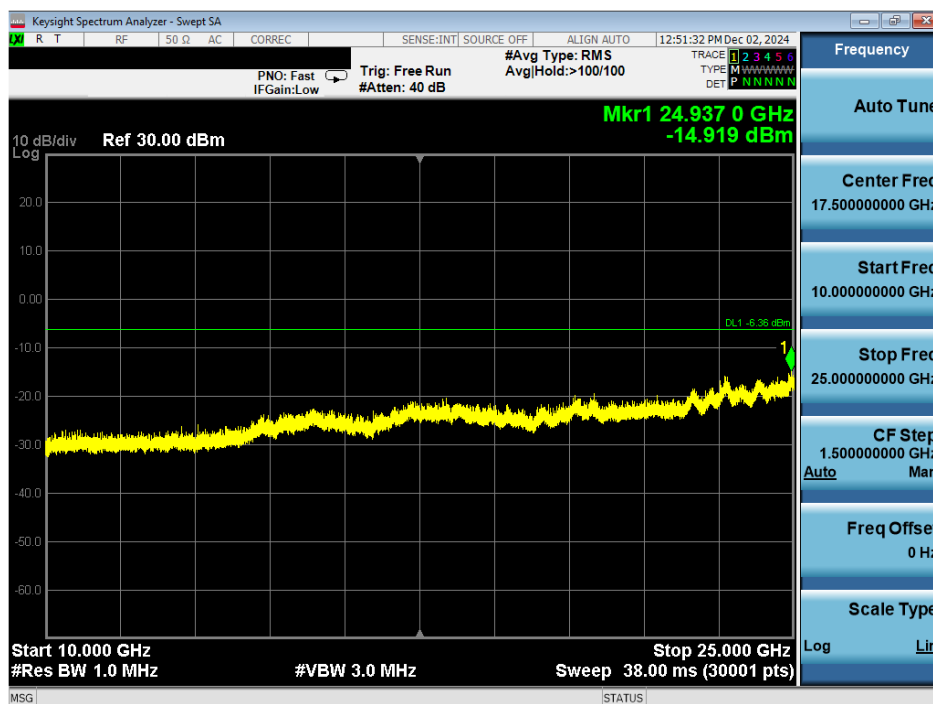


Plot 7-76. Conducted Spurious Plot Antenna WF2b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 66 of 89

V 10.6 09/14/2023

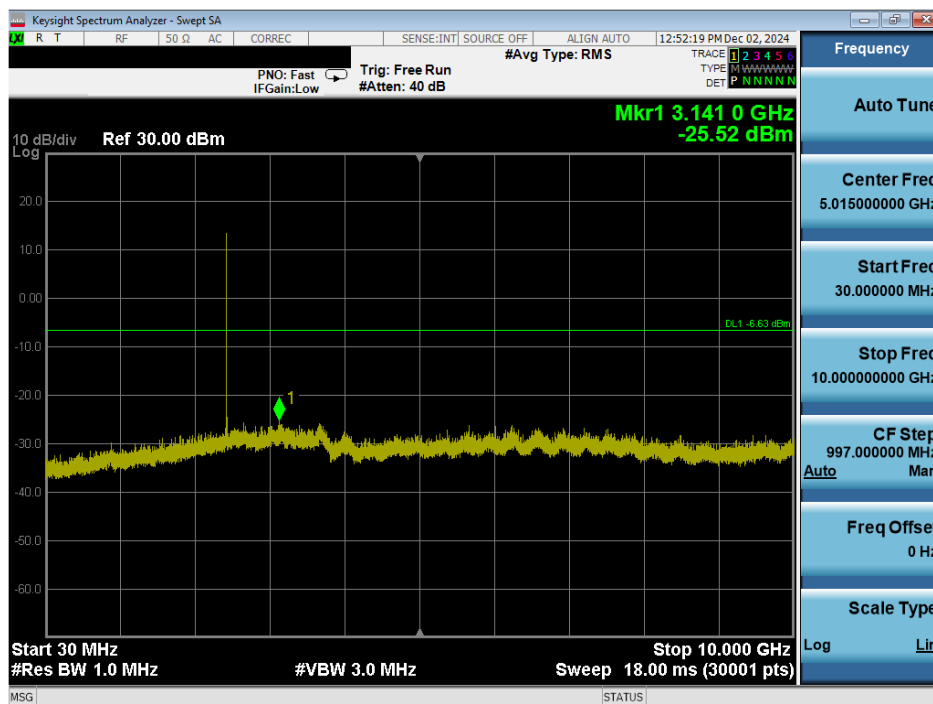


Plot 7-77. Conducted Spurious Plot Antenna WF2b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

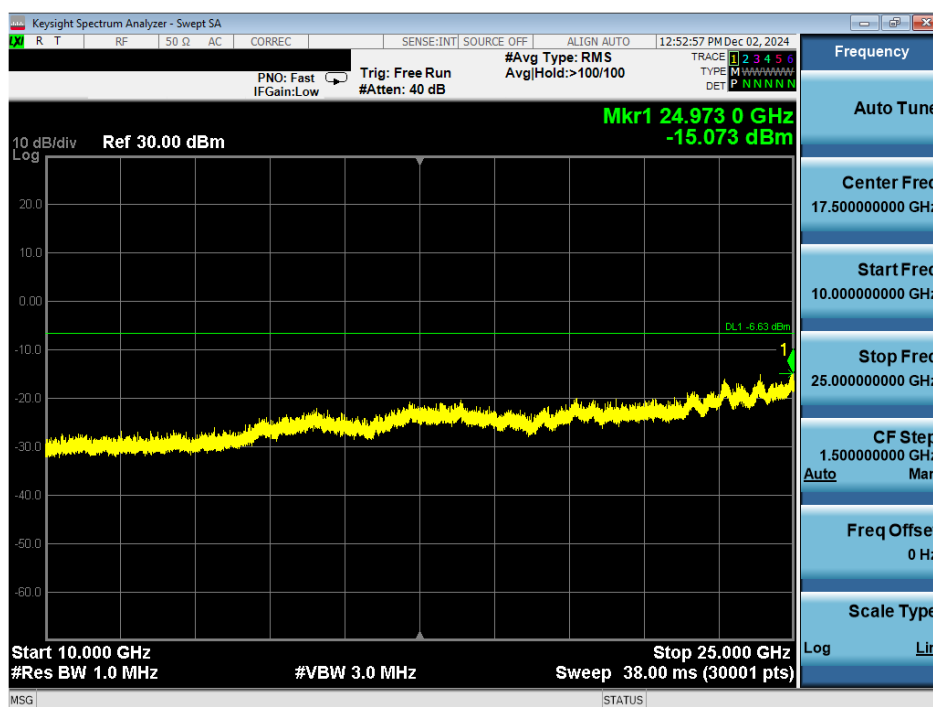


Plot 7-78. Conducted Spurious Plot Antenna WF2b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 67 of 89

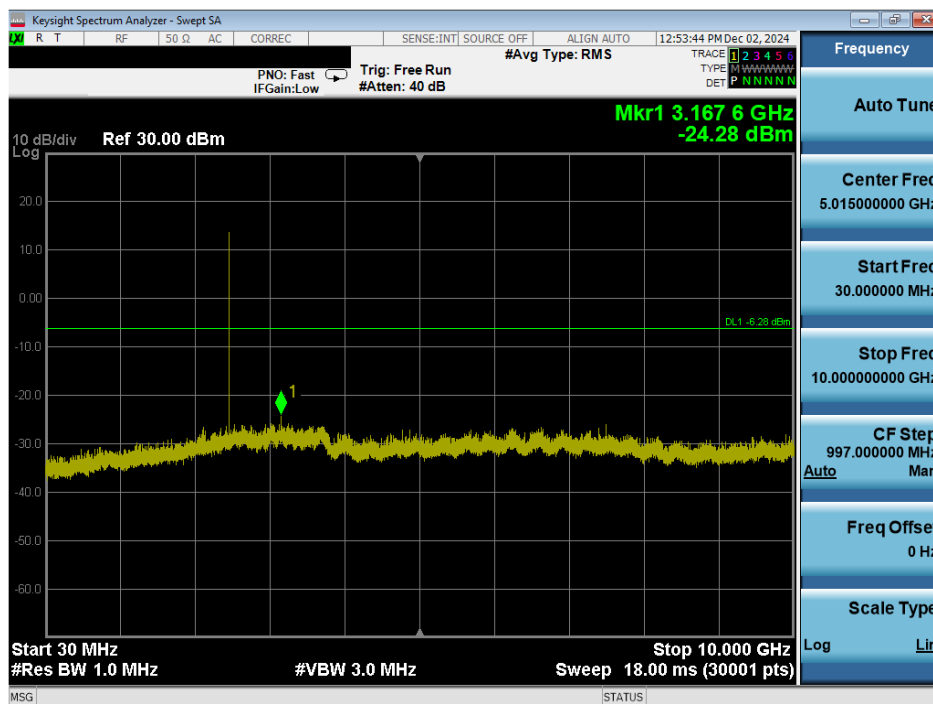

Plot 7-79. Conducted Spurious Plot Antenna WF2b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

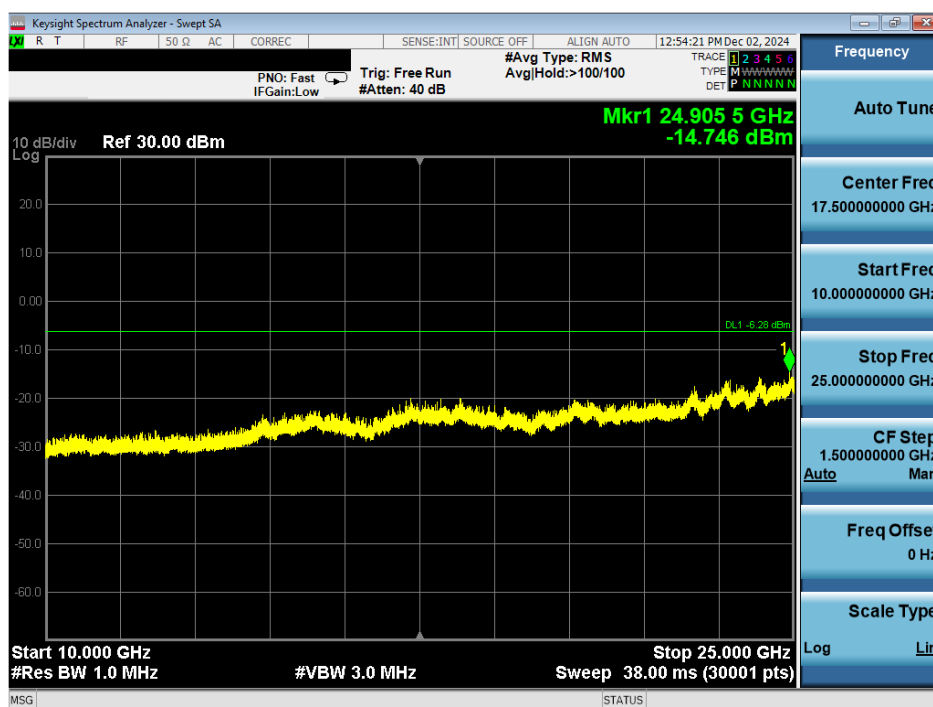

Plot 7-80. Conducted Spurious Plot Antenna WF2b (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 68 of 89



## 7.7 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-13 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-13. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2020 – Subclause 6.6.4.3  
KDB 558074 D01 v05r02 – Sections 8.6, 8.7

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

#### Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 69 of 89

V 10.6 09/14/2023

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

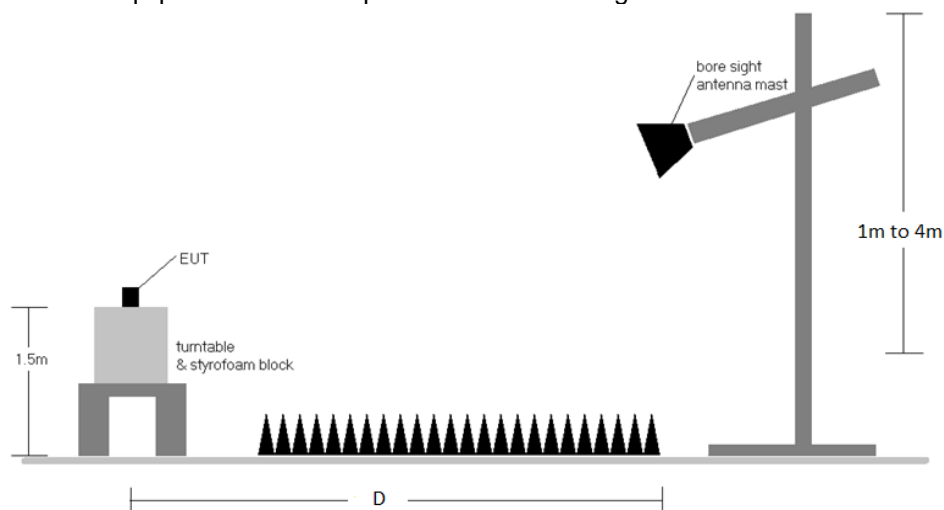

**Figure 7-6. Radiated Test Setup >1GHz**

## Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-13.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 70 of 89

V 10.6 09/14/2023

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.2 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: BCGA3268 IC: 579C-A3268	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 71 of 89

V 10.6 09/14/2023

## 7.7.1 Radiated Spurious Emission Measurements (Above 1GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

### TxBF

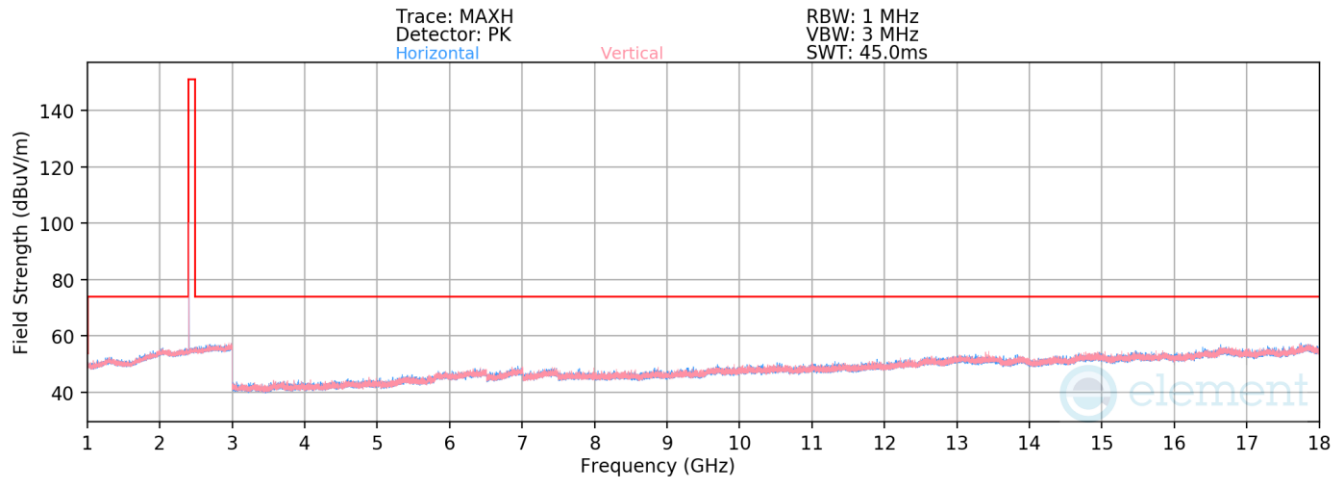

**Plot 7-81. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 1)**

Bluetooth Mode: HDR4  
Data Rate: 4Mbps  
Power Scheme: ePA  
Distance of Measurements: 3 Meters  
Operating Frequency: 2404MHz  
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4808.00	Average	V	-	-	-78.29	4.59	33.30	53.98	-20.68
4808.00	Peak	V	-	-	-67.10	4.62	44.53	73.98	-29.45
12020.00	Average	V	-	-	-81.25	14.12	39.87	53.98	-14.11
12020.00	Peak	V	-	-	-69.83	14.01	51.18	73.98	-22.80

**Table 7-14. Radiated Spurious Emission Measurements TxBF**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 72 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

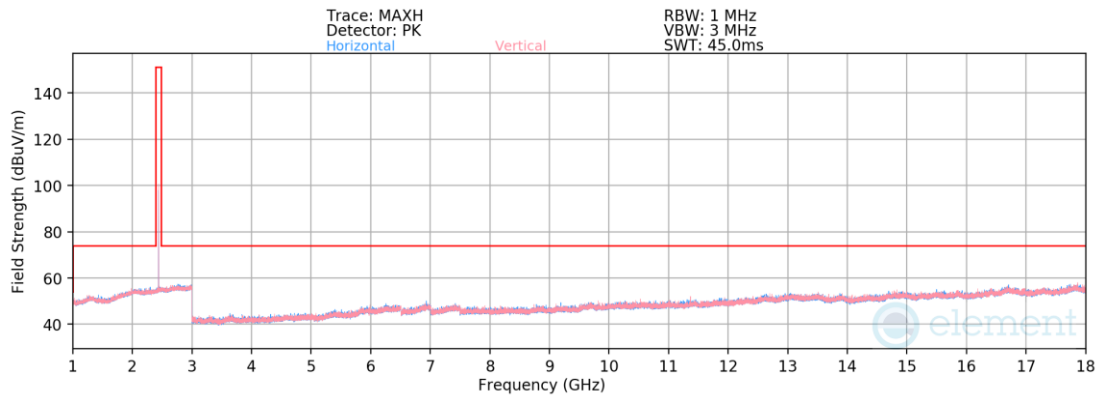

**Plot 7-82. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 38)**

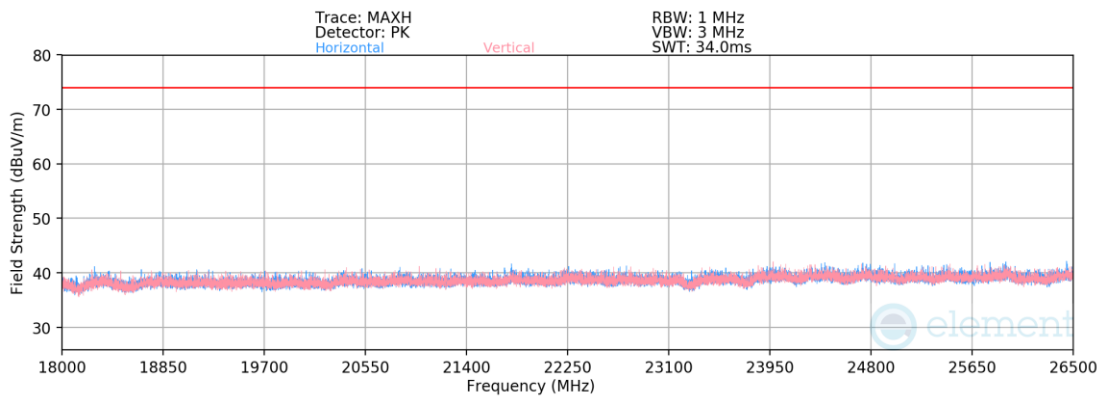

**Plot 7-83. Radiated Spurious Emissions Above 18GHz TxBF (4Mbps, HDR4, ePA – Ch. 38)**

Bluetooth Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 2441MHz

Channel: 38


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4882.00	Average	H	-	-	-78.42	4.85	33.43	53.98	-20.55
4882.00	Peak	H	-	-	-67.41	4.98	44.57	73.98	-29.41
7323.00	Average	H	-	-	-79.75	9.78	37.03	53.98	-16.95
7323.00	Peak	H	-	-	-68.01	9.64	48.63	73.98	-25.35
12205.00	Average	H	-	-	-81.27	15.00	40.73	53.98	-13.25
12205.00	Peak	H	-	-	-70.64	15.41	51.77	73.98	-22.21

**Table 7-15. Radiated Spurious Emission Measurements TxBF**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 73 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

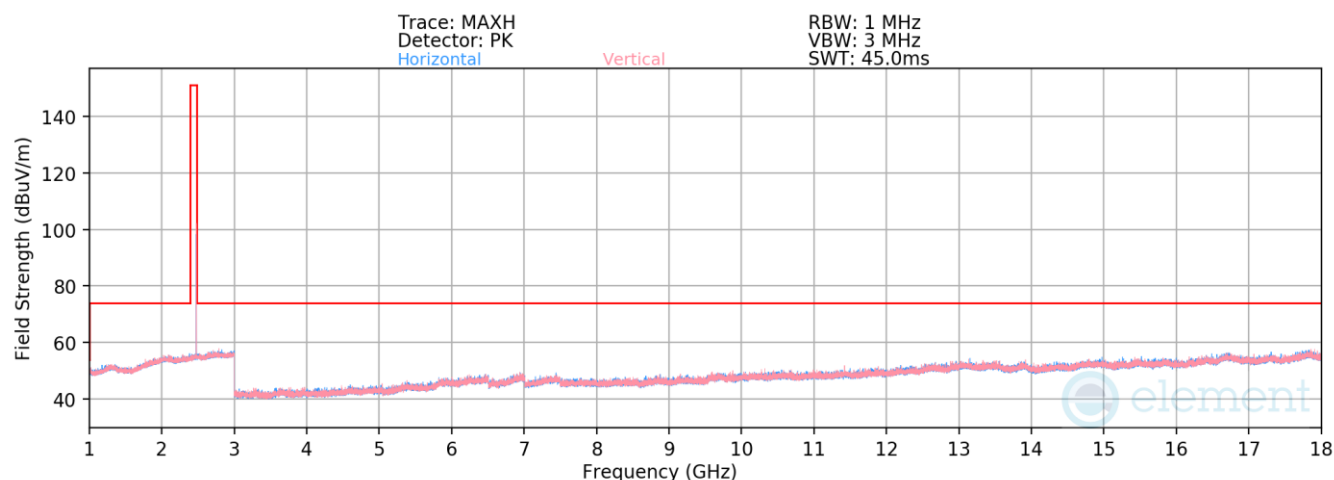

**Plot 7-84. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 73)**

Bluetooth Mode: HDR4  
Data Rate: 4Mbps  
Power Scheme ePA  
Distance of Measurements: 3 Meters  
Operating Frequency: 2476MHz  
Channel: 73

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4952.00	Average	V	-	-	-78.74	4.89	33.15	53.98	-20.83
4952.00	Peak	V	-	-	-67.69	4.93	44.24	73.98	-29.74
7428.00	Average	V	-	-	-79.50	9.57	37.07	53.98	-16.91
7428.00	Peak	V	-	-	-67.80	9.57	48.76	73.98	-25.22
12380.00	Average	V	-	-	-81.38	15.08	40.70	53.98	-13.28
12380.00	Peak	V	-	-	-70.02	15.17	52.15	73.98	-21.83

**Table 7-16. Radiated Spurious Emission Measurements TxBF**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 74 of 89

V 10.6 09/14/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.7.2 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


### Antenna WF7b

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

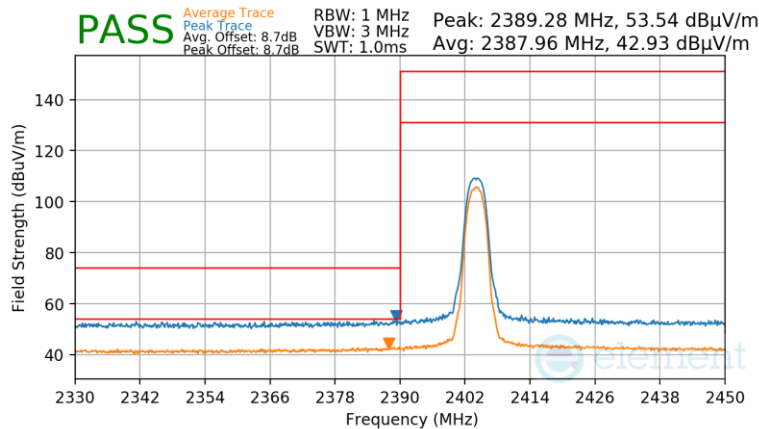

**Plot 7-85. Radiated Restricted Lower Band Edge Measurement Antenna WF7b**

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

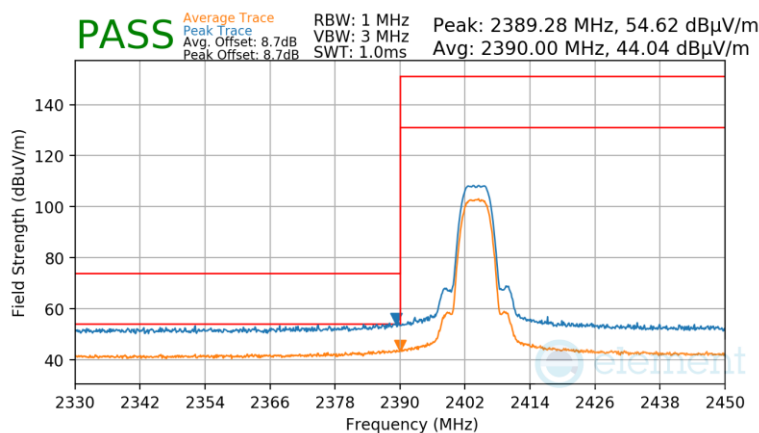


**Plot 7-86. Radiated Restricted Lower Band Edge Measurement Antenna WF7b**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 75 of 89

V 10.6 09/14/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

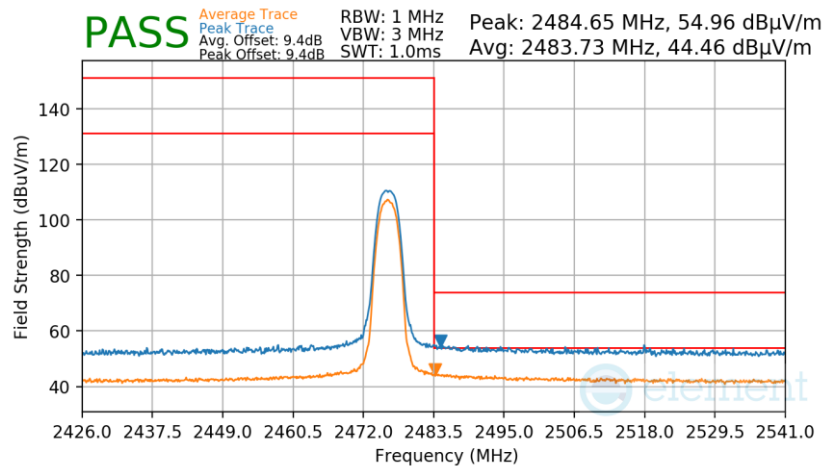

**Plot 7-87. Radiated Restricted Upper Band Edge Measurement Antenna WF7b**

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

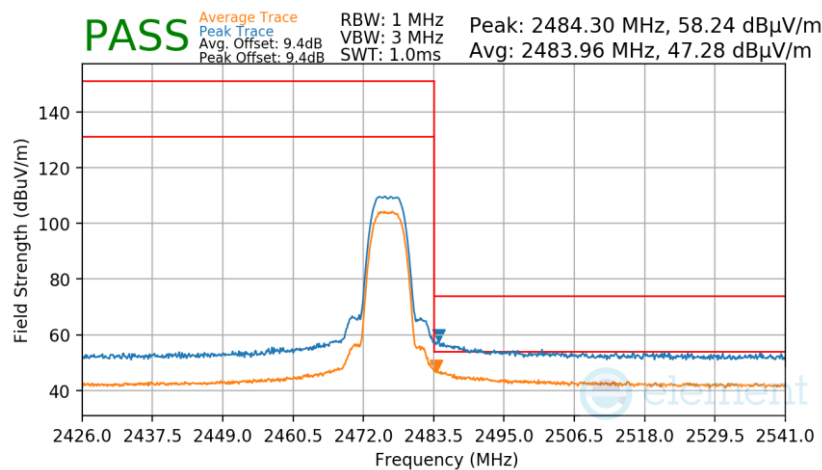

**Plot 7-88. Radiated Restricted Upper Band Edge Measurement Antenna WF7b**


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 76 of 89

V 10.6 09/14/2023




## Antenna WF2b

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

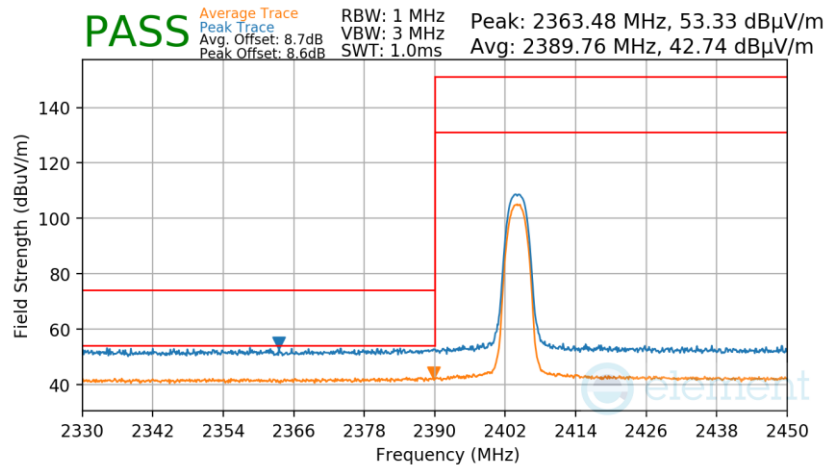

**Plot 7-89. Radiated Restricted Lower Band Edge Measurement Antenna WF2b**

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

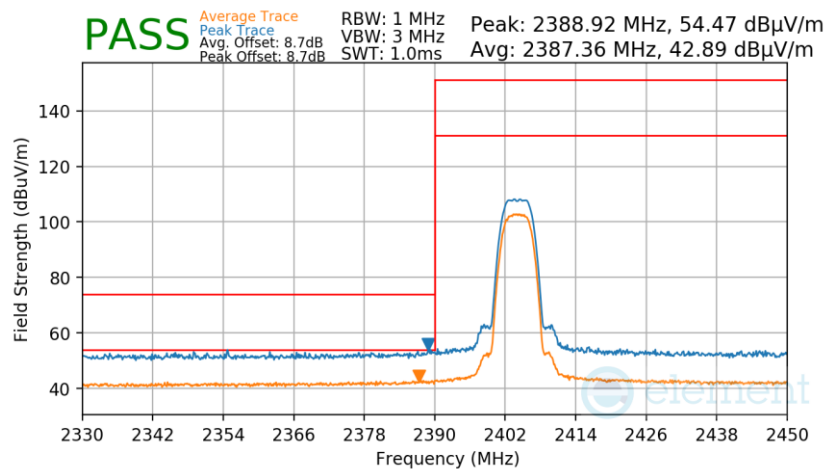


**Plot 7-90. Radiated Restricted Lower Band Edge Measurement Antenna WF2b**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 77 of 89


V 10.6 09/14/2023

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

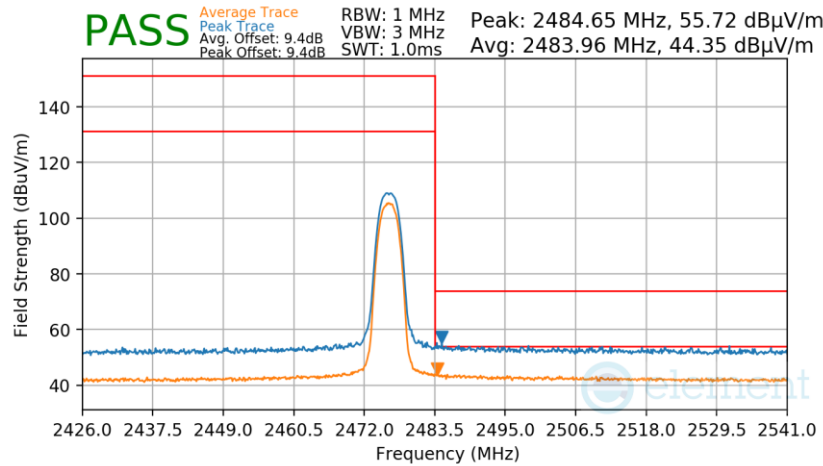

**Plot 7-91. Radiated Restricted Upper Band Edge Measurement Antenna WF2b**

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

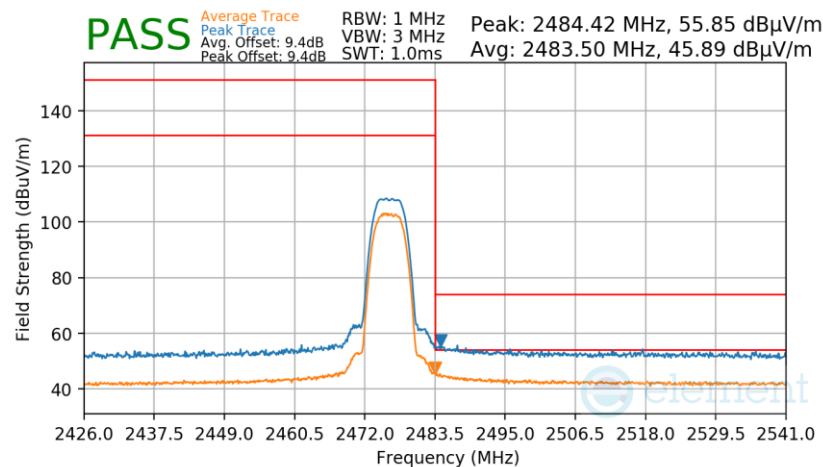


**Plot 7-92. Radiated Restricted Upper Band Edge Measurement Antenna WF2b**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 78 of 89

V 10.6 09/14/2023


## TxBF

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

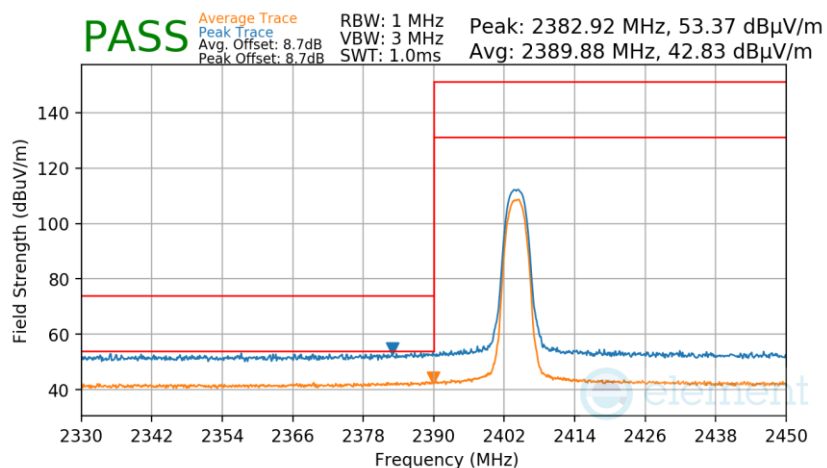

**Plot 7-93. Radiated Restricted Lower Band Edge Measurement TxBF**

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

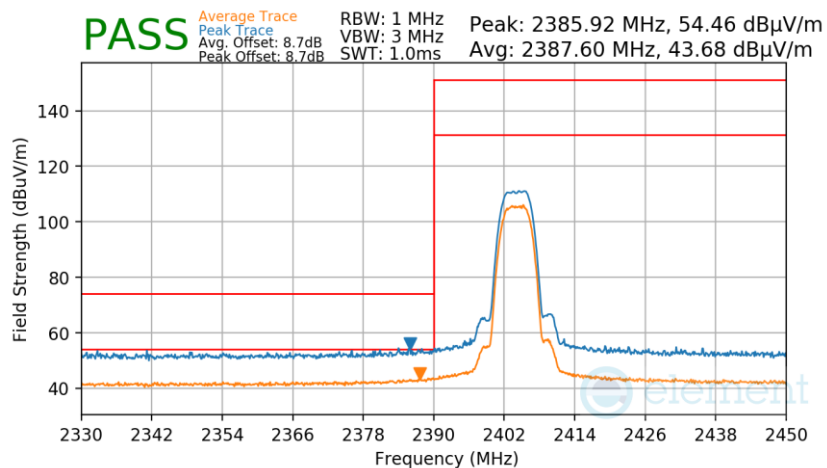


**Plot 7-94. Radiated Restricted Lower Band Edge Measurement TxBF**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 79 of 89


V 10.6 09/14/2023

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

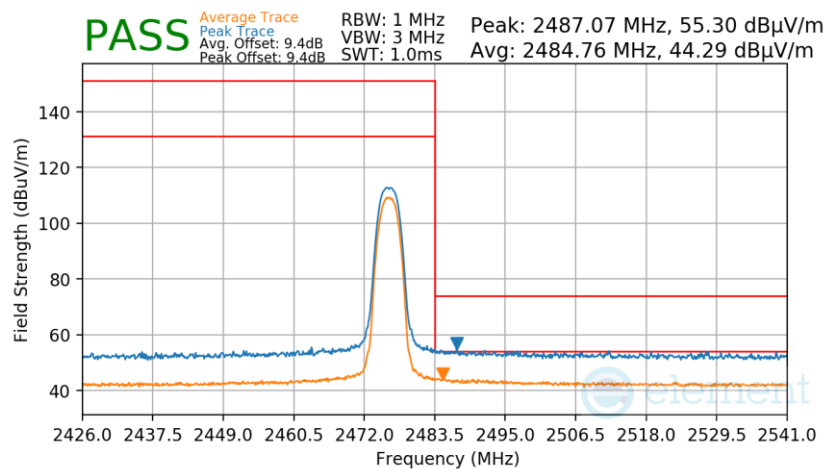

**Plot 7-95. Radiated Restricted Upper Band Edge Measurement TxBF**

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

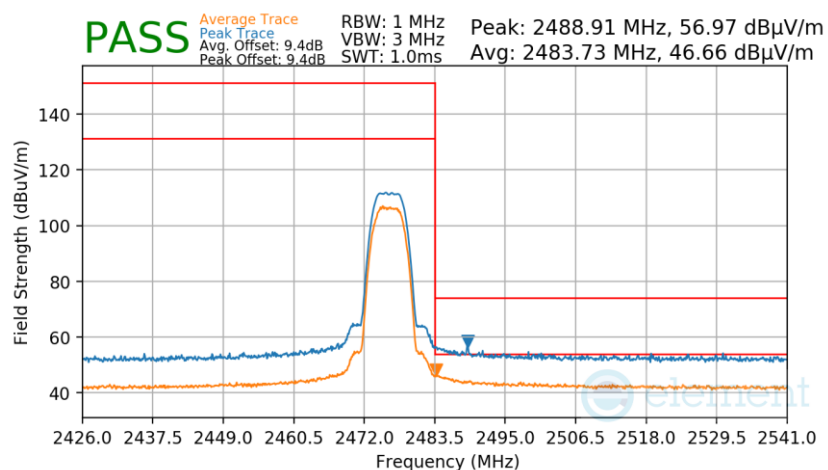

**Plot 7-96. Radiated Restricted Upper Band Edge Measurement TxBF**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 80 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.8 Radiated Spurious Emissions – Below 1GHz

**§15.209; RSS-Gen [8.9]**

### **Test Overview and Limit**

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-17 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-17 Radiated Limits**

### **Test Procedures Used**

ANSI C63.10-2020

### **Test Settings**

#### **Quasi-Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### **Peak Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 81 of 89


V 10.6 09/14/2023

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

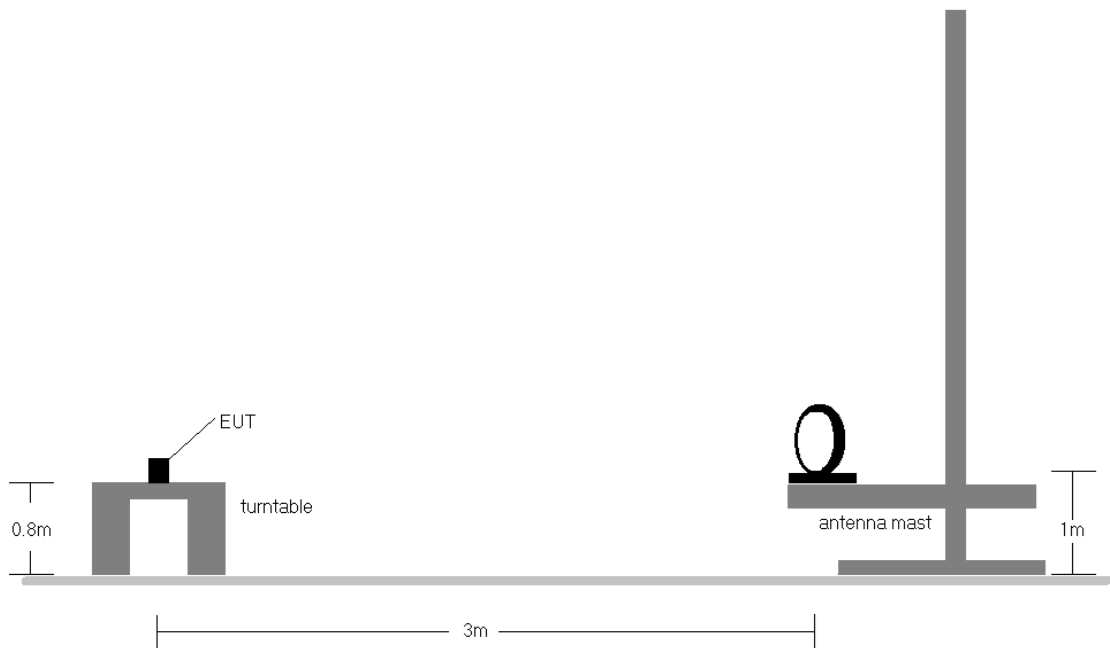

**Figure 7-7. Radiated Test Setup < 30MHz**

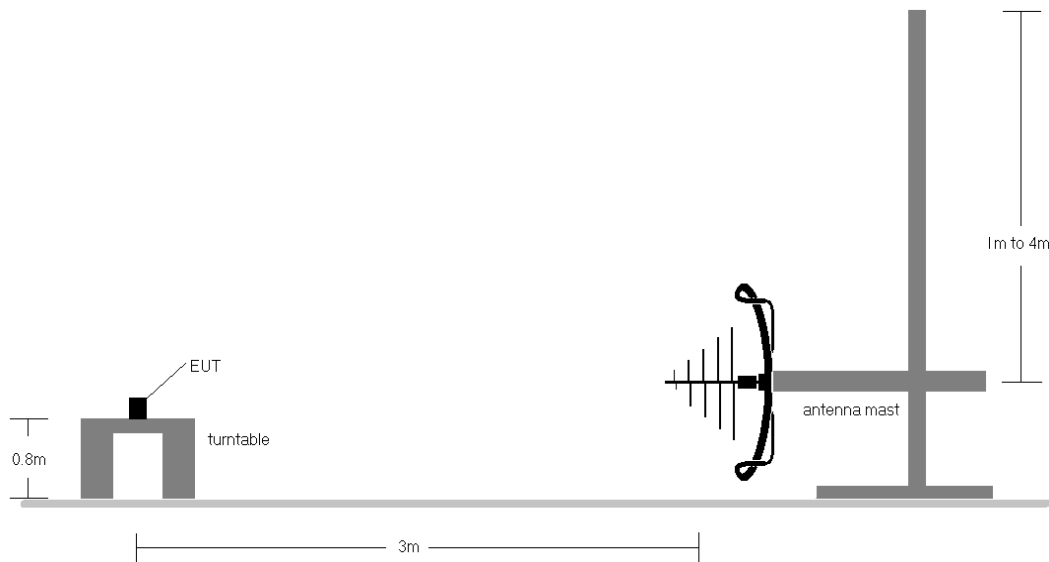

**Figure 7-8. Radiated Test Setup < 1GHz**

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 82 of 89

## **Test Notes**

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-17.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
8. No spurious emissions were detected within 20dB of the limit below 30MHz.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger

## **Sample Calculations**

### **Determining Spurious Emissions Levels**

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 83 of 89

V 10.6 09/14/2023

## Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

### TxBF

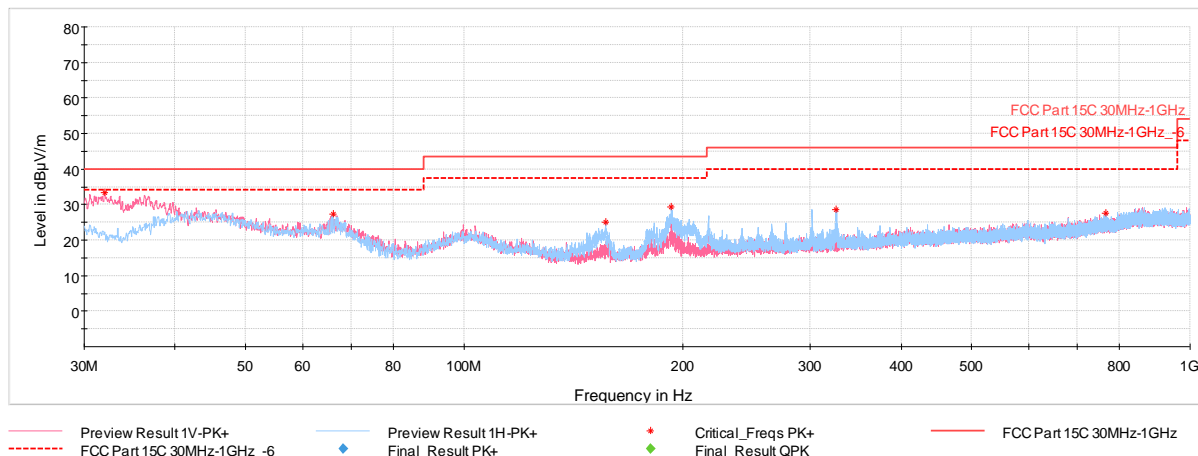

**Plot 7-97. Radiated Spurious Emissions Below 1GHz TxBF (4Mbps, ePA – Ch.38 with AC/DC Adapter via USB-C cable with wire charger)**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
31.99	Max Peak	V	100	293	-55.10	-18.53	33.37	40.00	-6.63
66.04	Max Peak	H	300	253	-62.12	-17.64	27.24	40.00	-12.76
156.63	Max Peak	H	200	177	-62.68	-19.19	25.13	43.52	-18.39
193.15	Max Peak	H	100	188	-61.52	-16.14	29.34	43.52	-14.18
325.75	Max Peak	H	100	62	-65.90	-12.48	28.62	46.02	-17.40
764.58	Max Peak	H	100	275	-75.68	-3.67	27.65	46.02	-18.37

**Table 7-18. Radiated Spurious Emissions Below 1GHz TxBF (4Mbps, ePA – Ch.38 with AC/DC Adapter via USB-C cable with wire charger)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 84 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 7.9 AC Line-Conducted Emissions Measurement

**§15.207; RSS-Gen [8.8]**

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-19. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 85 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

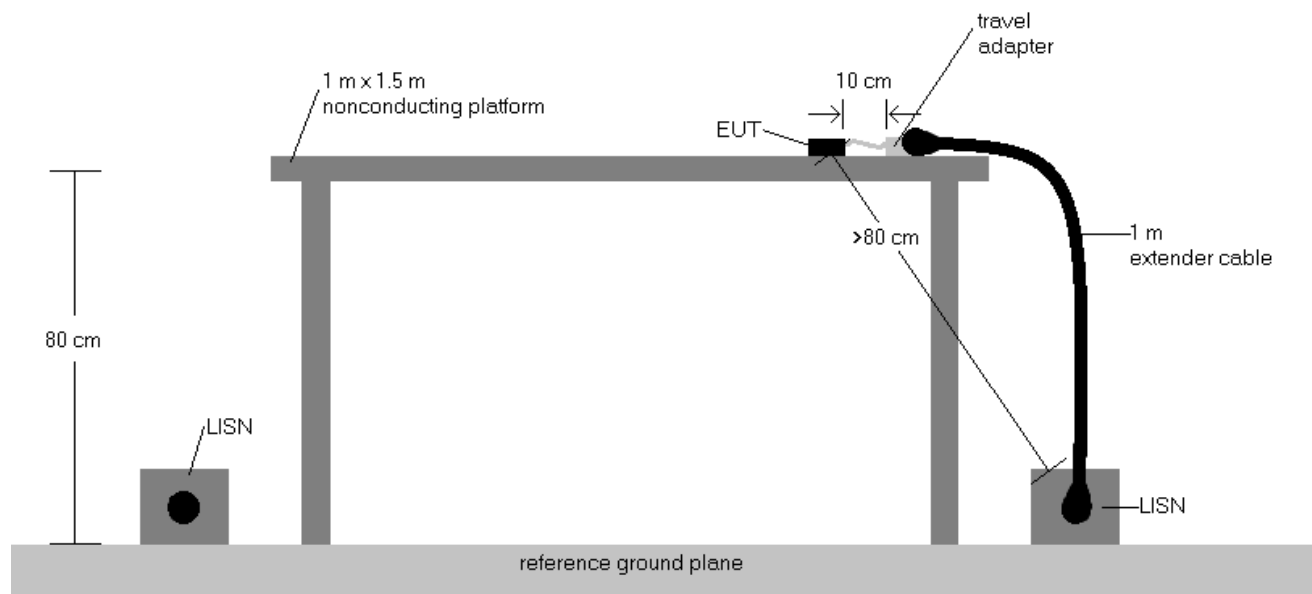

**Figure 7-9. Test Instrument & Measurement Setup**


## Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
  - EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plot are made using quasi peak and average detectors.
- Deviations to the Specifications: None.

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 86 of 89

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

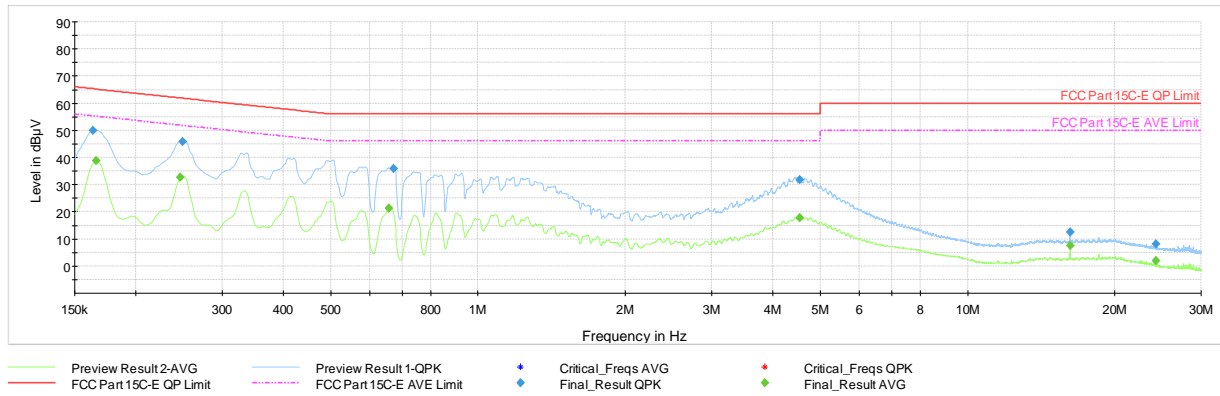


**Plot 7-83. AC Line Conducted Plot with Bluetooth HDR Tx BF (L1, 4Mbps ePA - Ch.38 with AC/DC Adapter via USB-C cable with wire charger)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	49.93	---	65.28	-15.35	L1	GND
0.17	FINAL	---	38.83	55.17	-16.34	L1	GND
0.25	FINAL	---	32.81	51.87	-19.06	L1	GND
0.25	FINAL	45.88	---	61.79	-15.91	L1	GND
0.66	FINAL	---	21.16	46.00	-24.84	L1	GND
0.67	FINAL	36.02	---	56.00	-19.98	L1	GND
4.53	FINAL	31.96	---	56.00	-24.04	L1	GND
4.54	FINAL	---	17.87	46.00	-28.13	L1	GND
16.18	FINAL	12.37	---	60.00	-47.63	L1	GND
16.18	FINAL	---	7.44	50.00	-42.56	L1	GND
24.28	FINAL	---	2.10	50.00	-47.90	L1	GND
24.28	FINAL	8.14	---	60.00	-51.86	L1	GND

**Table 7-20. AC Line Conducted Data with Bluetooth HDR Tx BF (L1, 4Mbps ePA - Ch.38 with AC/DC Adapter via USB-C cable with wire charger)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 87 of 89

V 10.6 09/14/2023

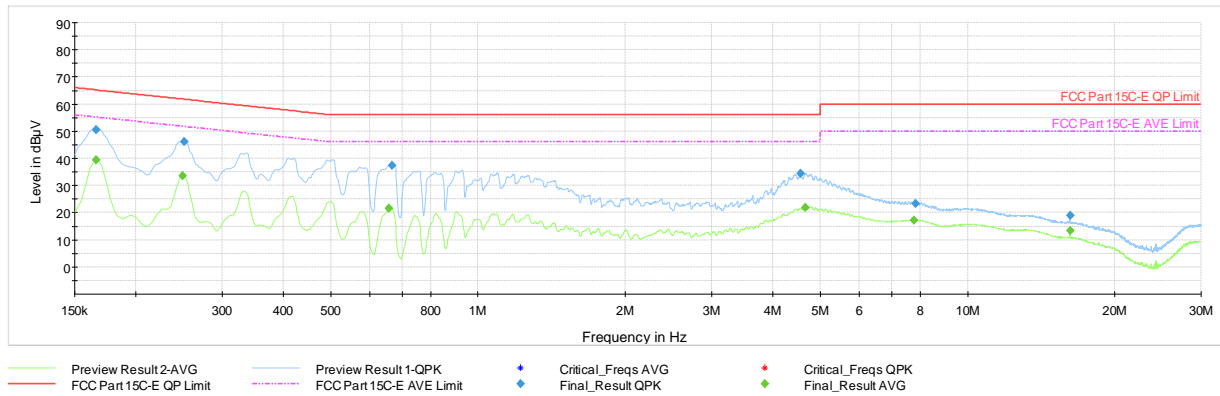

**Plot 7-84. AC Line Conducted Plot with Bluetooth HDR TxBF (N, 4Mbps ePA - Ch.38 with AC/DC Adapter via USB-C cable with wire charger)**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	39.48	55.17	-15.69	N	GND
0.17	FINAL	50.65	---	65.17	-14.52	N	GND
0.25	FINAL	---	33.52	51.79	-18.27	N	GND
0.25	FINAL	46.20	---	61.72	-15.52	N	GND
0.66	FINAL	---	21.54	46.00	-24.46	N	GND
0.67	FINAL	37.40	---	56.00	-18.60	N	GND
4.55	FINAL	34.58	---	56.00	-21.42	N	GND
4.66	FINAL	---	21.78	46.00	-24.22	N	GND
7.77	FINAL	---	17.21	50.00	-32.79	N	GND
7.84	FINAL	23.37	---	60.00	-36.63	N	GND
16.18	FINAL	---	13.51	50.00	-36.49	N	GND
16.18	FINAL	18.81	---	60.00	-41.19	N	GND

**Table 7-21. AC Line Conducted Data with Bluetooth HDR TxBF (N, 4Mbps ePA - Ch.38 with AC/DC Adapter via USB-C cable with wire charger)**

FCC ID: BCGA3268 IC: 579C-A3268		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210074-05.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 88 of 89

V 10.6 09/14/2023

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3268 and IC: 579C-A3268** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

<b>FCC ID:</b> BCGA3268 <b>IC:</b> 579C-A3268		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2410210074-05.BCG	<b>Test Dates:</b> 10/25/2024 - 1/2/2025	<b>EUT Type:</b> Tablet Device	Page 89 of 89